

**UNCLASSIFIED**

**AD 425302**

**DEFENSE DOCUMENTATION CENTER**

**FOR**

**SCIENTIFIC AND TECHNICAL INFORMATION**

**CAMERON STATION, ALEXANDRIA, VIRGINIA**



**UNCLASSIFIED**

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AFCRL-65  
AD 425 302

425302

LOGGED BY DDC  
AS AD NO. 425 302

**ADMITTANCE  
OF ANNULAR  
SLOT ANTENNAS  
RADIATING  
INTO A  
PLASMA LAYER**

SCIENTIFIC REPORT NO. 3

CONTRACT NO. AF19(628)-2410

**AUGUST 1963**

AIR FORCE CAMBRIDGE RESEARCH LABORATORIES  
OFFICE OF AEROSPACE RESEARCH  
LAURENCE G. HANSOM FIELD  
BEDFORD, MASSACHUSETTS

APPLIED RESEARCH LABORATORY

**SYLVANIA ELECTRONIC SYSTEMS**  
Government Systems Management  
*for GENERAL TELEPHONE & ELECTRONICS*



ADMITTANCE OF ANNULAR SLOT ANTENNAS  
RADIATING INTO A PLASMA LAYER

By  
Janis Galejs

APPLIED RESEARCH LABORATORY  
SYLVANIA ELECTRONIC SYSTEMS  
A Division of Sylvania Electric Products Inc.  
40 SYLVAN ROAD, WALTHAM 54, MASSACHUSETTS

August 1963

Contract No. AFL9(628)-2410  
Project No. 4642  
Task No. 464202

SCIENTIFIC REPORT NO. 3

Air Force Cambridge Research Laboratories  
Office of Aerospace Research  
Laurence G. Hanscom Field  
Bedford, Massachusetts

NOTICES

Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government agencies should be directed to the:

DEFENSE DOCUMENTATION CENTER (DDC)  
CAMERON STATION  
ALEXANDRIA, VIRGINIA

Department of Defense contractors must be established for DDC services or have their 'need-to-know' certified by the cognizant military agency of their project or contract. All other persons and organizations should apply to the:

U. S. DEPARTMENT OF COMMERCE  
OFFICE OF TECHNICAL SERVICES  
WASHINGTON 25, D. C.

---

**ABSTRACT**

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY Applied Research Laboratory Sylvania Electronic Systems, A Division of Sylvania Electric Products Inc., 40 Sylvan Road, Waltham 54, Massachusetts		2a. REPORT SECURITY CLASSIFICATION <b>Unclassified</b>
3. REPORT TITLE Admittance of Annular Slot Antennas Radiating into a Plasma Layer		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific Report No. 3		
5. AUTHOR(S) (Last name, first name, initial) Galejs, Janis		
6. PUBLICATION DATE August 1963 7. ORIGINATOR'S REPORT NO(S) S-3040-3		7. TOTAL NO OF PAGES 22 9a. CONTRACT OR GRANT NO AF19(628)-2410 b. PROJECT NO 4642 c. TASK NO 464202
10. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) AFCRL-63-395		11. SUPPLEMENTARY NOTES (For ASTIA use only)
12. RELEASE STATEMENTS (For ASTIA use only)		
13. AUTHORS' KEY TERMS - UNCLASSIFIED ONLY		
1. Slot Antennas	7.	13.
2. Slot Admittance	8.	14.
3. Plasma Layers	9.	15.
4. Reentry Communication	10.	16.
5. Layers of Lossy Dielectric	11.	17.
6. Stratified Plasma	12.	18.
14. ASTIA DESCRIPTORS (For ASTIA use only)		
15. IDENTIFIERS - UNCLASSIFIED ONLY (e.g., Model numbers; weapon system, project, chemical compound and trade names)		

16. BODY OF ABSTRACT (Including if applicable, Purpose; Method or approach; Results; Conclusions, applications and recommendations.)

The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to  $10\lambda$ . The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma ( $\epsilon_p/\epsilon_0 \neq 1$  and/or  $\tan \delta_p \gg 1$ ). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.

17. INDEXING ANNOTATION

The admittance is obtained for an annular slot antenna, covered by variable thickness plasma layers, radiating into a large circular waveguide.

## I. INTRODUCTION

The admittance of annular slots which are backed by coaxial lines or cavities and which radiate into free space have been discussed by Levine and Papas [1951], Wait [1958], Cohn and Flesher [1958] and Galejs and Thompson [1962]. The same formulation applies also to slots radiating into a half space filled with a homogeneous dielectric or plasma. There are difficulties in treating the inhomogeneous half space or dielectric and plasma layers of finite thicknesses, although such an analysis has been carried out by Galejs [1963a] for a rectangular slot covered by finite plasma layers. The calculations of the slot admittances are greatly simplified if the slot is assumed to radiate into a wide waveguide instead of an inhomogeneous half space, [Galejs 1963b]. A waveguide of a finite diameter is characterized by discrete modes which can be readily treated in machine calculations.

Radiation from a coaxial line into a waveguide of infinite diameter has been discussed by Cohn and Flesher [1958]. Their results agree with an analytical formulation not employing such artificial boundaries [Levine and Papas, 1951]. In the present note a waveguide of finite diameter will be used and it will be shown that the admittance of this waveguide approximates the admittance for an inhomogeneous half space. This was also the case for rectangular slots provided the guide diameter exceeded 5 to  $10\lambda$  [Galejs, 1963b]. A similar behavior can be also expected for annular slots radiating into a circular guide because the fields in the vicinity of the slot should not be affected by the presence of the waveguide walls if the distance between the walls is large enough. Hence, this geometry will yield realistic susceptances and also realistic estimates of losses in the plasma layer. However, the radiation fields of the slot will be modified by the waveguide walls. The radiation patterns of the slot cannot be determined in this model and the effects of guide diameter on the radiation conductance must be also examined in detail.

The analytical formulation of the admittance for a cavity backed slot can be considered as straight forward, and only the principal steps of the development are summarized in Section II. Convergence considerations and the numerical results will be discussed in Section III.

## II. SLOT ADMITTANCE

The waveguide and slot geometry is shown in Fig. 1. The same basic geometry has been considered by Galejs and Thompson [1962], and the configuration of Fig. 1 may be treated by a suitable modification of this work. For an  $\exp(j\omega t)$  time variation of the  $\phi$  symmetrical fields the magnetic field components  $H_\phi(\rho, z)$  are given by

$$H_{\phi i} = \sum_{m=1}^{\infty} A_m R_m(\rho) (e^{-Y_m z} + B_m e^{Y_m z}) \quad (1)$$

$$H_{\phi j} = \sum_{n=1}^{\infty} A_{nj} R_n(\rho) (e^{-Y_{nj} z} + B_{nj} e^{Y_{nj} z}) \quad (2)$$

where  $j = 0, 1$  or  $2$  and where  $B_{nj} = 0$ . The orthonormal radial functions  $R_p(\rho)$  are defined as

$$R_p(\rho) = N_p J_1(\lambda_p \rho)_{n2} \quad (3)$$

where  $p = m$  or  $n$  and

$$J_0(\lambda_m b) = J_0(\lambda_n c) = 0 \quad (4)$$

$$N_m^{-1} = \frac{b}{\sqrt{2}} J_1(\lambda_m b) \quad (5)$$

$$N_n^{-1} = \frac{c}{\sqrt{2}} J_1(\lambda_n c) \quad (6)$$

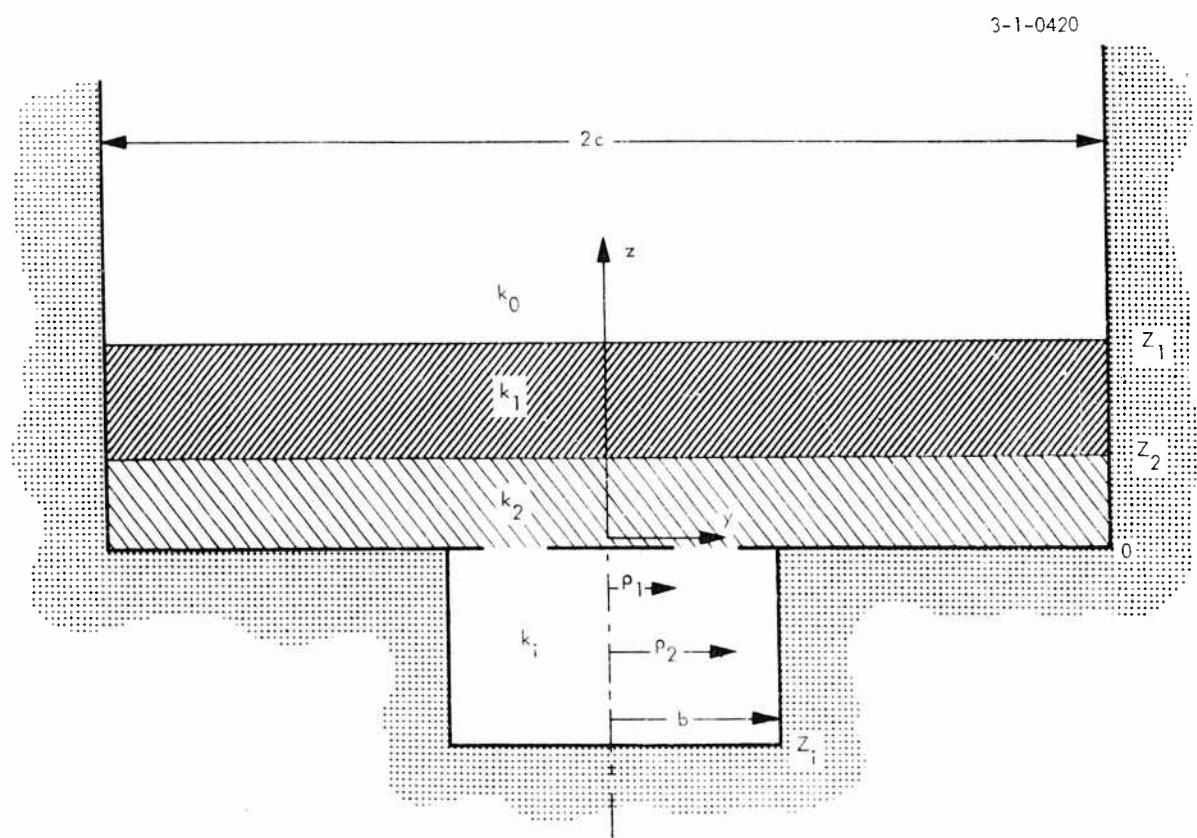


Figure 1. Slot Geometry

The propagation constants  $\gamma_m$  and  $\gamma_{n_j}$  are defined in the first quadrant of the complex plane by

$$\gamma_m = \sqrt{\lambda_m^2 - k_1^2} \quad (7)$$

$$\gamma_{n_j} = \sqrt{\lambda_n^2 - k_j^2} \quad (8)$$

where

$$k_j^2 = \omega^2 \mu_0 \epsilon_j + j\omega \mu_0 \sigma_j \quad (9)$$

with a corresponding expression for  $k_1^2$ . The radial electric field component  $E_p$  is computed from (1) or (2) as

$$(\sigma_j + j\omega \epsilon_j) E_{pj}(p, z) = - \frac{\partial}{\partial t} H_{\phi j}(p, z) \quad (10)$$

where  $j = 0, 1, 2$ , or 1. The amplitudes  $A_q$  ( $q = m$  or  $n_2$ ) are related to the excitation field of the cavity  $E_p(p, 0) = \mathcal{E}(p)$ . Multiplying  $E_p(p, 0)$  as computed from (10) with  $R_p(p) p dp$  and integrating over the  $z = 0$  plane gives

$$A_q = \frac{(\sigma_j + j\omega \epsilon_j)}{(1 - B_q) \gamma_q} \int_{p_1}^{p_2} \mathcal{E}(p) R_p(p) p dp \quad (11)$$

with  $j = 1$  or 2. The tangential magnetic fields  $H_{\phi 1}(p, 0)$  and  $H_{\phi 2}(p, 0)$  differ by the linear source current density  $J_s(p)$  across the slot, where  $J_s(p)$  is assumed to be of the form

$$J_s(p) = \frac{I}{2\pi p} \quad (12)$$

After substituting (11) in (1) and (2) one obtains an integral equation

$$H_{\phi 1}(\rho, 0) = H_{\phi 2}(\rho, 0) + J_s(\rho) \quad (13)$$

in the unknown field distribution  $\mathcal{E}(\rho)$ . A variational principle for determining  $\mathcal{E}(\rho)$  is constructed by multiplying (13) with  $\rho \mathcal{E}(\rho)$  and then integrating from  $\rho = \rho_1$  to  $\rho_2$ . After defining the voltage across the slot V as

$$V = - \int_{\rho_1}^{\rho_2} \mathcal{E}(\rho) d\rho \quad (14)$$

it follows that

$$\frac{IV}{2\pi} = \sum_{n=1}^{\infty} \frac{\sigma_2 + j\omega\epsilon_2}{Y_{n2}} \frac{1 + B_{n2}}{1 - B_{n2}} \left[ \int_{\rho_1}^{\rho_2} \mathcal{E}(\rho) R_n(\rho) \rho d\rho \right]^2 - \sum_{m=1}^{\infty} \frac{\sigma_1 + j\omega\epsilon_1}{Y_m} \frac{1 + B_m}{1 - B_m} \left[ \int_{\rho_1}^{\rho_2} \mathcal{E}(\rho) R_m(\rho) \rho d\rho \right]^2 \quad (15)$$

The integrations can be carried out for a general power series representation of  $\mathcal{E}(\rho)$  and it is formally possible to determine all the coefficients in this power series. [Levine and Papas, 1951; Galejs and Thompson, 1962]. However, the subsequent numerical work appears to be tractable only for the simplest form of the trial function

$$\mathcal{E}(\rho) = \frac{a_0}{\rho} \quad (16)$$

The integrations are straightforward for this form of  $\mathcal{E}(\rho)$  and the slot admittance  $Y = I/V$  follows as

$$Y = \frac{\frac{4\pi}{(\log \frac{\rho_2}{\rho_1})^2}}{\sum_{n=1}^{\infty} \frac{\sigma_2 + j\omega\varepsilon_2}{Y_{n2}} \frac{1+B_{n2}}{1-B_{n2}} \left[ \frac{J_o(\lambda_n \rho_1) - J_o(\lambda_n \rho_2)}{\lambda_n^c J_1(\lambda_n^c)} \right]^2} \\ - \sum_{m=1}^{\infty} \frac{\sigma_i + j\omega\varepsilon_i}{Y_m} \frac{1+B_m}{1-B_m} \left[ \frac{J_o(\lambda_m \rho_1) - J_o(\lambda_m \rho_2)}{\lambda_m^b J_1(\lambda_m^b)} \right]^2 \quad (17)$$

The reflection coefficient  $B_m$  is determined from the requirement that  $E_p(\rho, z_o) = 0$ . This gives

$$B_m = e^{-2Y_m z_i} \quad (18)$$

The reflection coefficient  $B_{nj}$  are determined after matching the  $E_p$  and  $H_\phi$  components across the dielectric interfaces at  $z = z_1$  and  $z_2$ . A computation results in

$$B_{nj} = e^{-2Y_{nj} z_j} \frac{S_{nj} - D_{nj}}{S_{nj} + D_{nj}} \quad (19)$$

where

$$S_{nj} = \left( \frac{k_{j-1}}{k_j} \right)^2 \left[ e^{-2Y_{n(j-1)} z_j} + B_{n(j-1)} \right] \quad (20)$$

$$D_{nj} = \frac{Y_{n(j-1)}}{Y_{nj}} \left[ e^{-2Y_{n(j-1)} z_j} - B_{n(j-1)} \right] \quad (21)$$

and where  $j = 1$  or  $2$ . The computation starts by determining  $B_{n1}$  with  $B_{no} = 0$  (there are only outgoing waves for  $z > z_1$ ). This value of  $B_{n1}$  is then used for computing  $B_{n2}$ , which completes the determination of the slot admittance.

As long as  $\gamma_1$ ,  $\epsilon_1$  or  $\sigma_2 \neq 0$  the real part of  $Y$  will differ from the radiation conductance  $G_r$ . However,  $G_r$  may be determined after computing the power flow for  $z > z_1$ . The radiated power is given by

$$P_r = G_r V^2$$

$$\begin{aligned} &= \operatorname{Re} \iint_{\rho \phi} E_{\rho \phi} \times H_{\phi \phi}^* \rho d\rho d\phi \\ &= 2\pi \operatorname{Re} \sum_n \frac{\gamma_{no}}{j\omega\epsilon_0} \left| e^{-\gamma_{no} z} A_{no} \right|^2 \end{aligned} \quad (22)$$

The only values of  $n$  which contribute to  $P_r$  are those with imaginary  $\gamma_{no}$ . Hence  $\left| e^{-\gamma_{no} z} \right| = 1$  and

$$G_r = 2\pi \operatorname{Re} \sum_n \frac{\gamma_{no}}{j\omega\epsilon_0} \left| \frac{A_{no}}{V} \right|^2 \quad (23)$$

$A_{no}$  is related to  $A_{n2}$  by matching either  $H_\phi$  or  $E_\rho$  across the dielectric boundaries at  $z = z_1$  and  $z_2$ . It follows that

$$\frac{A_{no}}{A_{n2}} = \frac{e^{-\gamma_{ni} z_1} + B_{ni} e^{\gamma_{ni} z_1}}{e^{-\gamma_{no} z_1}} \cdot \frac{e^{-\gamma_{n2} z_2} + B_{n2} e^{\gamma_{n2} z_2}}{e^{-\gamma_{ni} z_2} + B_{ni} e^{\gamma_{ni} z_2}} \quad (24)$$

where  $B_{ni}$  and  $B_{n2}$  are obtained from (19) to (21). The amplitude  $A_{n2}$  is related to  $V$  from (11), (14) and (16) as

$$\frac{A_{n2}}{V} = - \frac{\sqrt{2} (\sigma_2 + j\omega\epsilon_2)}{(j\log \frac{\rho_2}{\rho_1}) (1 + B_{n2})} \frac{[J_0(\lambda_n \rho_1) - J_0(\lambda_n \rho_2)]}{\gamma_{n2} \lambda_n c J_1(\lambda_n c)} \quad (25)$$

The substitution of (24) and (25) in (23) completes the specification of  $G_r$ .

## III. DISCUSSION

The slot admittance is examined first for radiation into a homogeneous large guide of increasing radius  $c$ . The plot of the slot conductance in Fig. 2 is discontinuous with discontinuities occurring at those points where an additional mode starts propagating in the large guide. The slot admittance for the radiation into a homogeneous half space is shown dashed in Fig. 2. The conductance curves for the waveguide cross periodically the half-space conductance curve. The changes of the waveguide admittance tend to become less for increasing guide radius  $c$ , and a randomly selected guide radius will give a fair approximation to the correct admittance if  $c$  is of the order of 15 to  $30\lambda$ . However, the relatively slow convergence of the sum representing the slot susceptance restricts the choice of  $c$  to smaller values. For smaller guides the radius may be always selected such that the waveguide admittance is equal to the slot admittance for a homogeneous half space. The susceptance calculations are illustrated in Fig. 3 for two values of slot radius  $\rho_1$ . For small guide radii the series converges slowly, and a larger number of terms will be required in the summation. Similarly, a larger number of terms is required for guides of large radii  $c$ , as is evident from Fig. 4.

Admittance calculations for plasma layers of various thicknesses  $h$  are illustrated in Figs. 5 and 6. The slot conductance  $G$  and the radiation conductance  $G_r$  decrease with increasing layer thicknesses  $h$ , while the slot susceptance is almost constant for  $h/\lambda > 0.1$ . For plasma layers of  $h/\lambda > 0.3$  the conductance depends on the guide radius  $c$ . The computed conductance is more accurate for the larger  $c$  values when it approaches  $G$  of the homogeneous half space\* for  $h/\lambda > 1$ .

---

\* For  $k\rho_1 \ll 1$  and  $\rho_2/\rho_1 \approx 1$  and for a lossless dielectric half space

$$G_o = \sqrt{\frac{\epsilon}{\epsilon_o}} \frac{(k\rho)^4}{360} \left[ 1 - \frac{(k\rho)^2}{5} + \frac{(k\rho)^4}{56} + \dots \right]$$

where  $\rho = (\rho_1 + \rho_2)/2$ . For a lossy dielectric half space  
 $G_\ell = G_o + B \tan \delta$ .

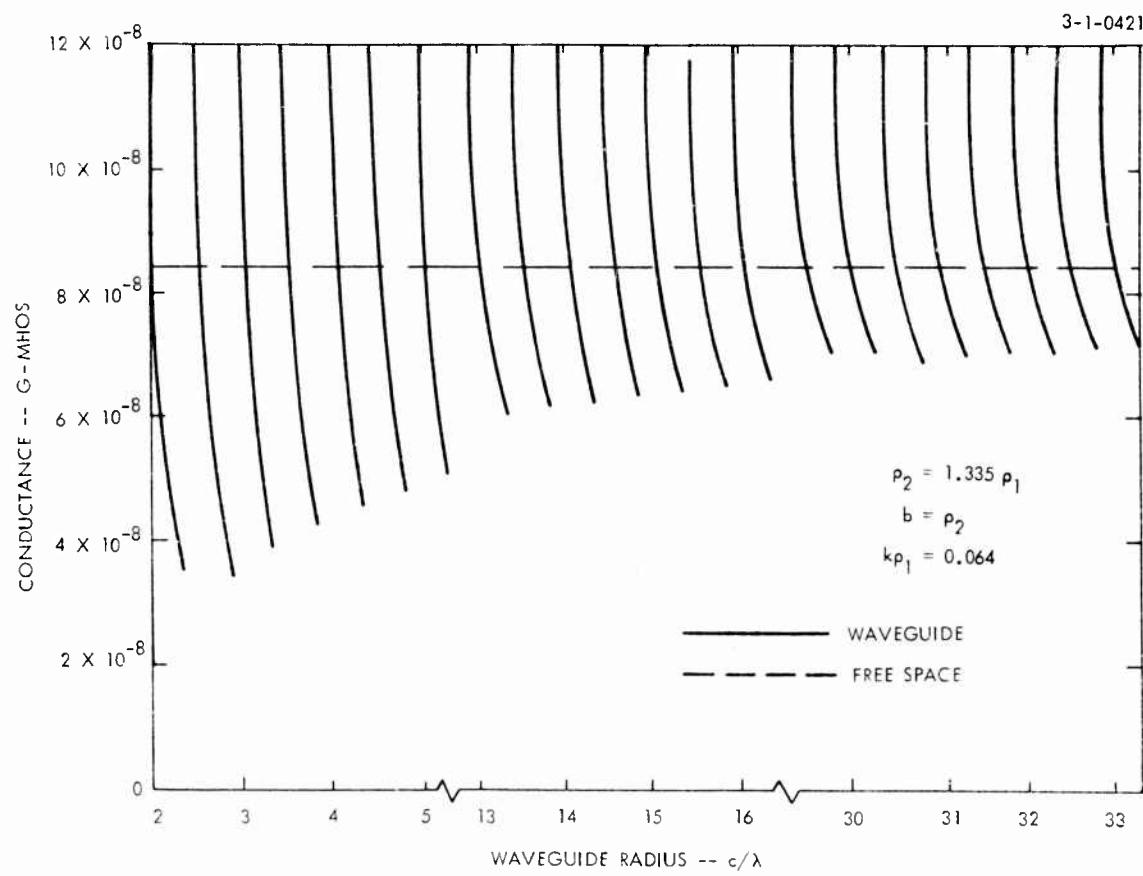


Figure 2. Conductance of the Annular Slot

3-1-0422

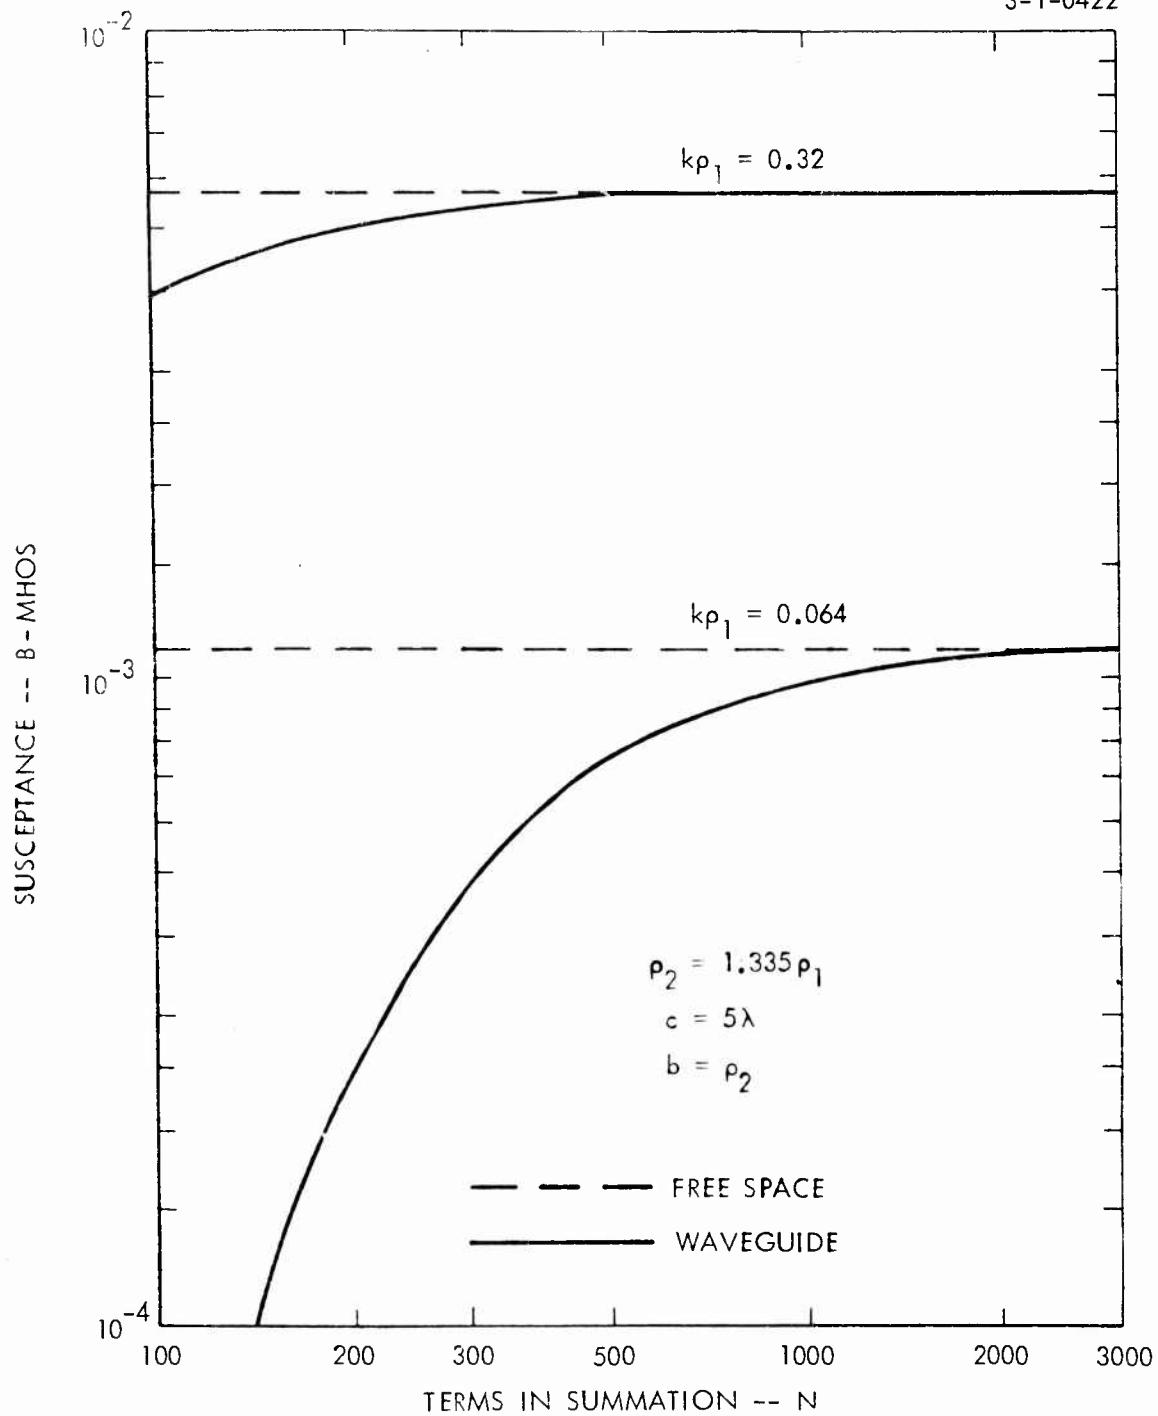


Figure 3. Susceptance of the Annular Slot

3-1-0423

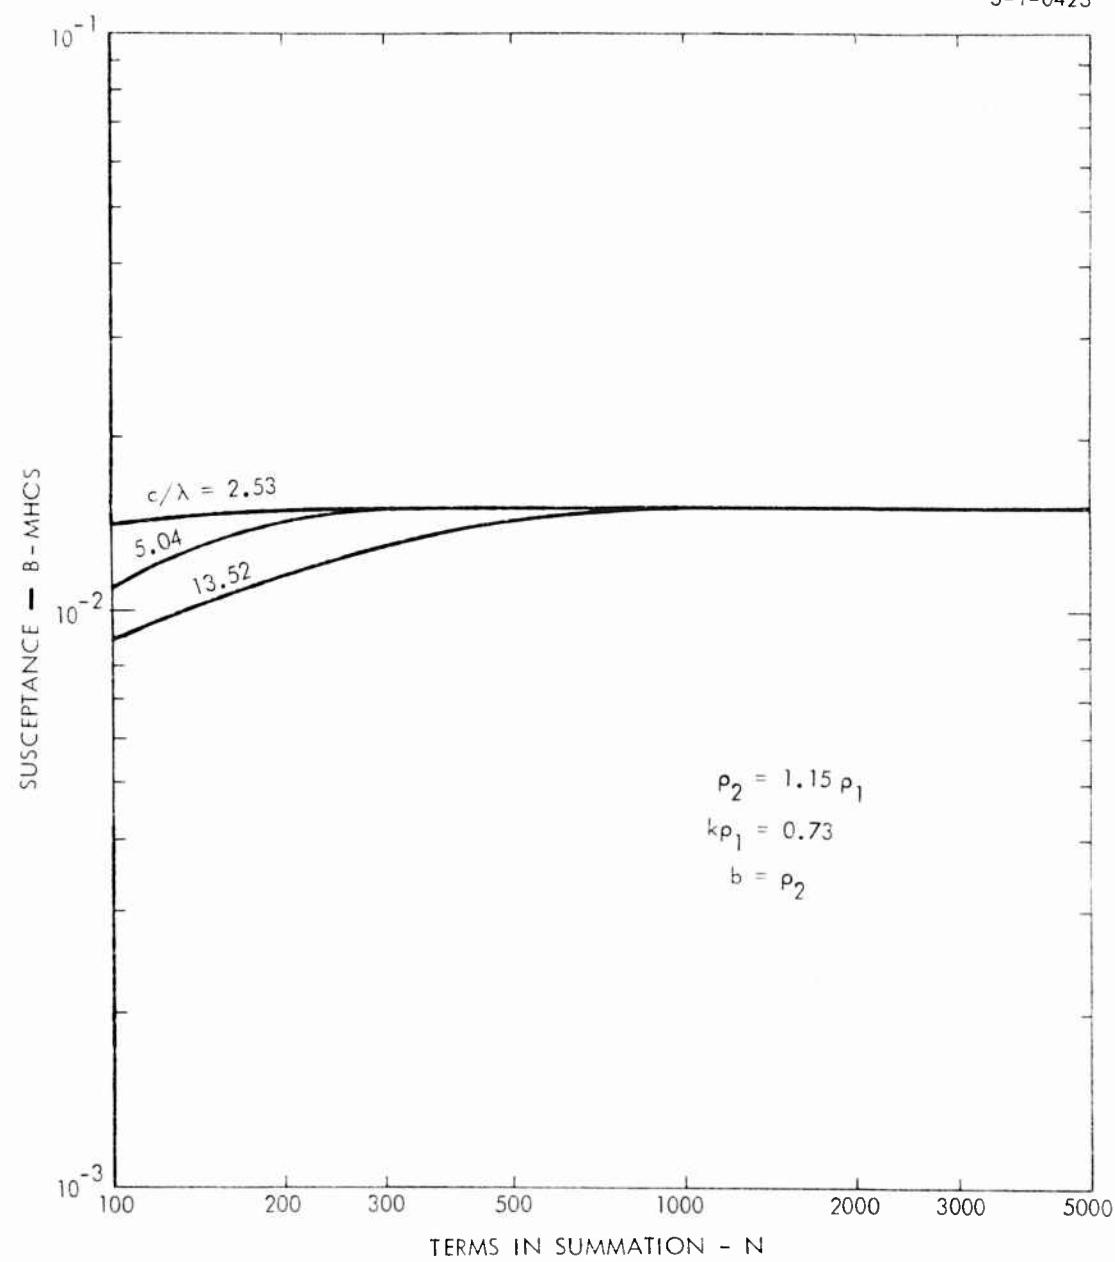


Figure 4. Susceptance of the Annular Slot

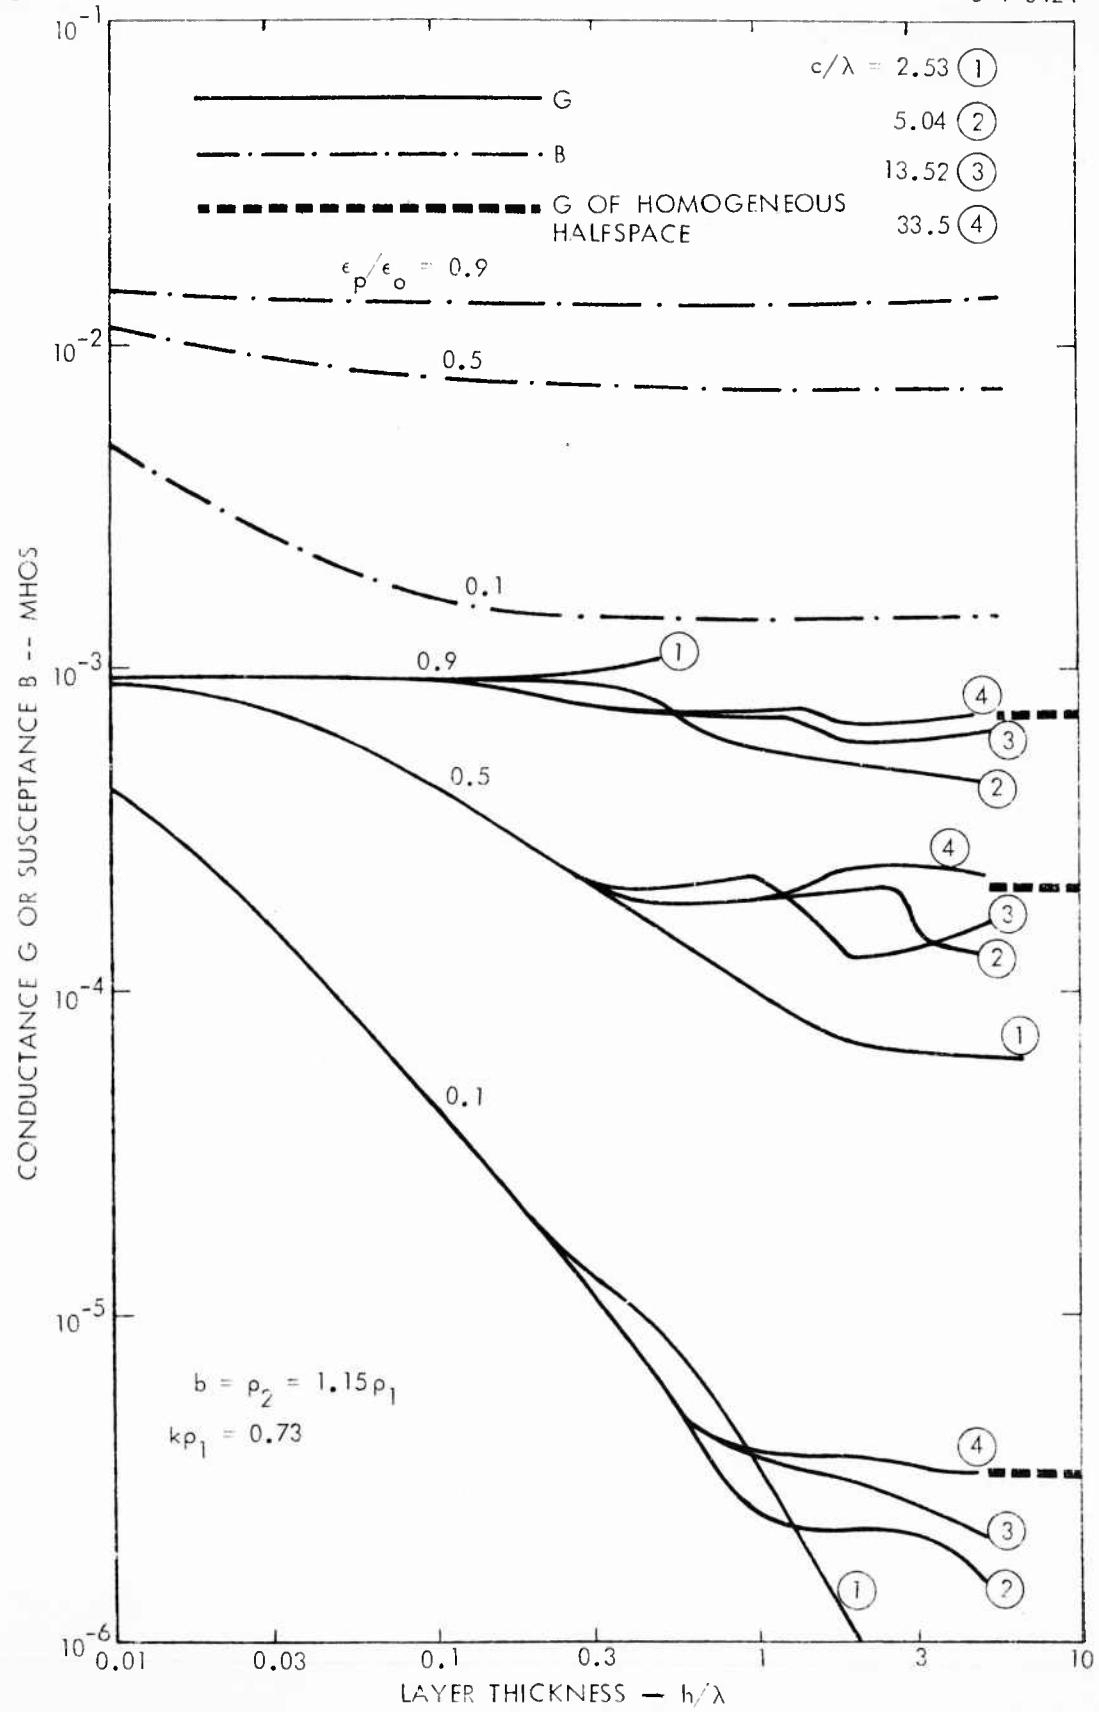


Figure 5. Slot Admittance for Lossless Plasma Layers

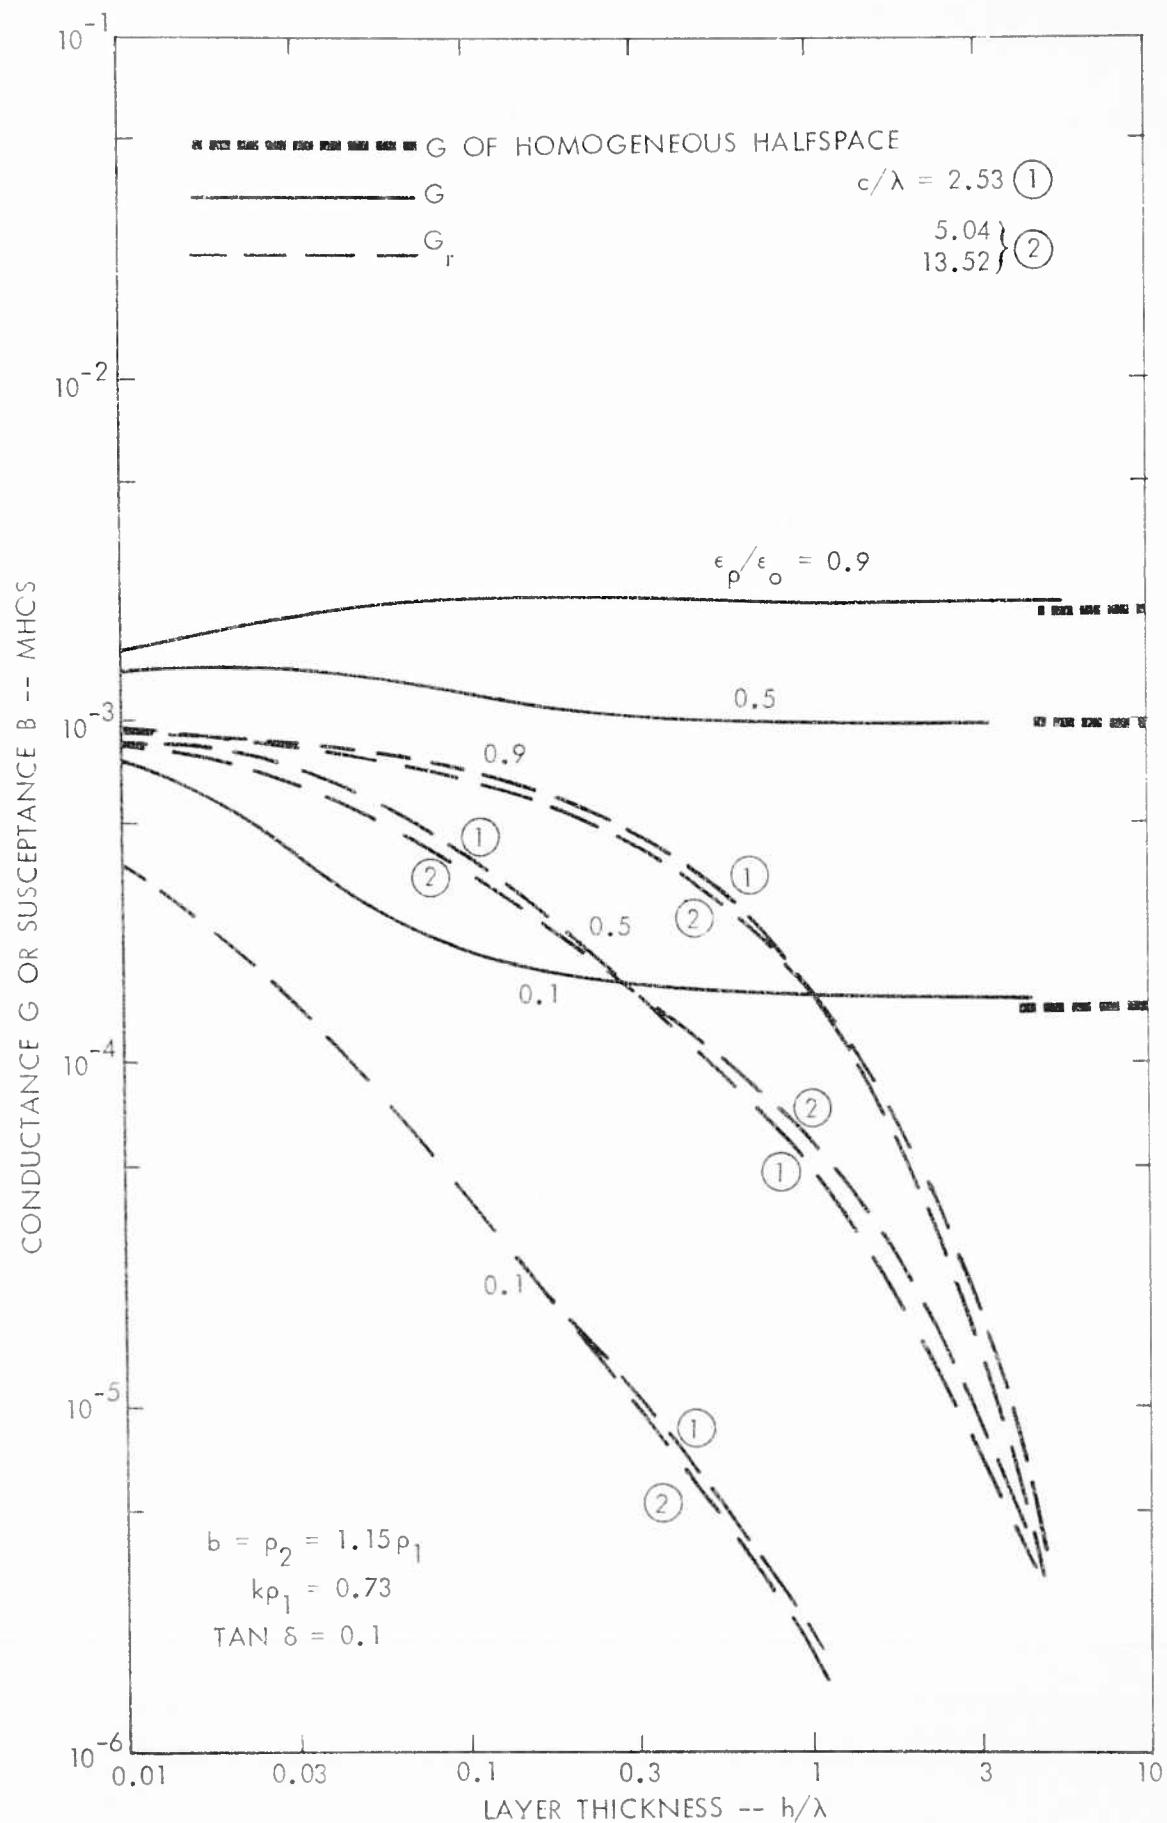


Figure 6. Slot Admittance for Lossy Plasma Layers

A similar effect of increasing waveguide size was also observed for rectangular plasma covered slots [Galejs, 1963b]. For slots covered by thin plasma layers the admittance is principally determined by the nearby air-to-plasma interface, and is hardly affected by the relatively distant guide walls. The guide walls have an effect for large plasma thicknesses, particularly in cases where  $\epsilon_p/\epsilon_0$  is near unity, or where the electrical discontinuity at the air-to-plasma interface is small.

Only the admittance reflected into the slot plane by the outside space ( $z > 0$ ) has been indicated in Figs. 5 and 6. The admittance reflected by the cavity or  $Y_i$  has been discussed earlier by Galejs and Thompson [1962], and is not included in the above admittance figures.

Slot admittance calculations will be also made for the parameters of a typical reentry plasma. An example of the electron density  $N_1$  and collision frequency  $v$  profiles near a hypersonic reentry vehicle is given in Fig. 19 of Rotman and Meltz [1961]. These data have been replotted in Fig. 7 along with the two-layer approximation that is suited for the present calculation. The calculated slot admittance is shown in Fig. 8 for various operating frequencies while the slot and the waveguide dimension remain constant in relation to the operating wavelength. For frequencies above the plasma frequency ( $f > f_p$ ) the radiation conductance is nearly the same as the total slot conductance. For frequencies below the plasma frequency the slot susceptance  $B$  is inductive and there are high losses and a low radiation conductance. The radiation conductance exhibits dips near the plasma frequencies of the two layers, which are at  $f_p = 3.22 \times 10^8$  and  $1.06 \times 10^9$  cps. Obviously, this example does not cover all the plasma and slot parameters of interest in reentry problems. However, the above calculations are straightforward and further examples will not be considered at present.

The present model is also suited for determining the slot admittance in presence of lossy dielectric layers. In an example the layer near the slot is assumed to be of low losses ( $\tan \phi_2 = 0.01$ ), while

3-1-0426

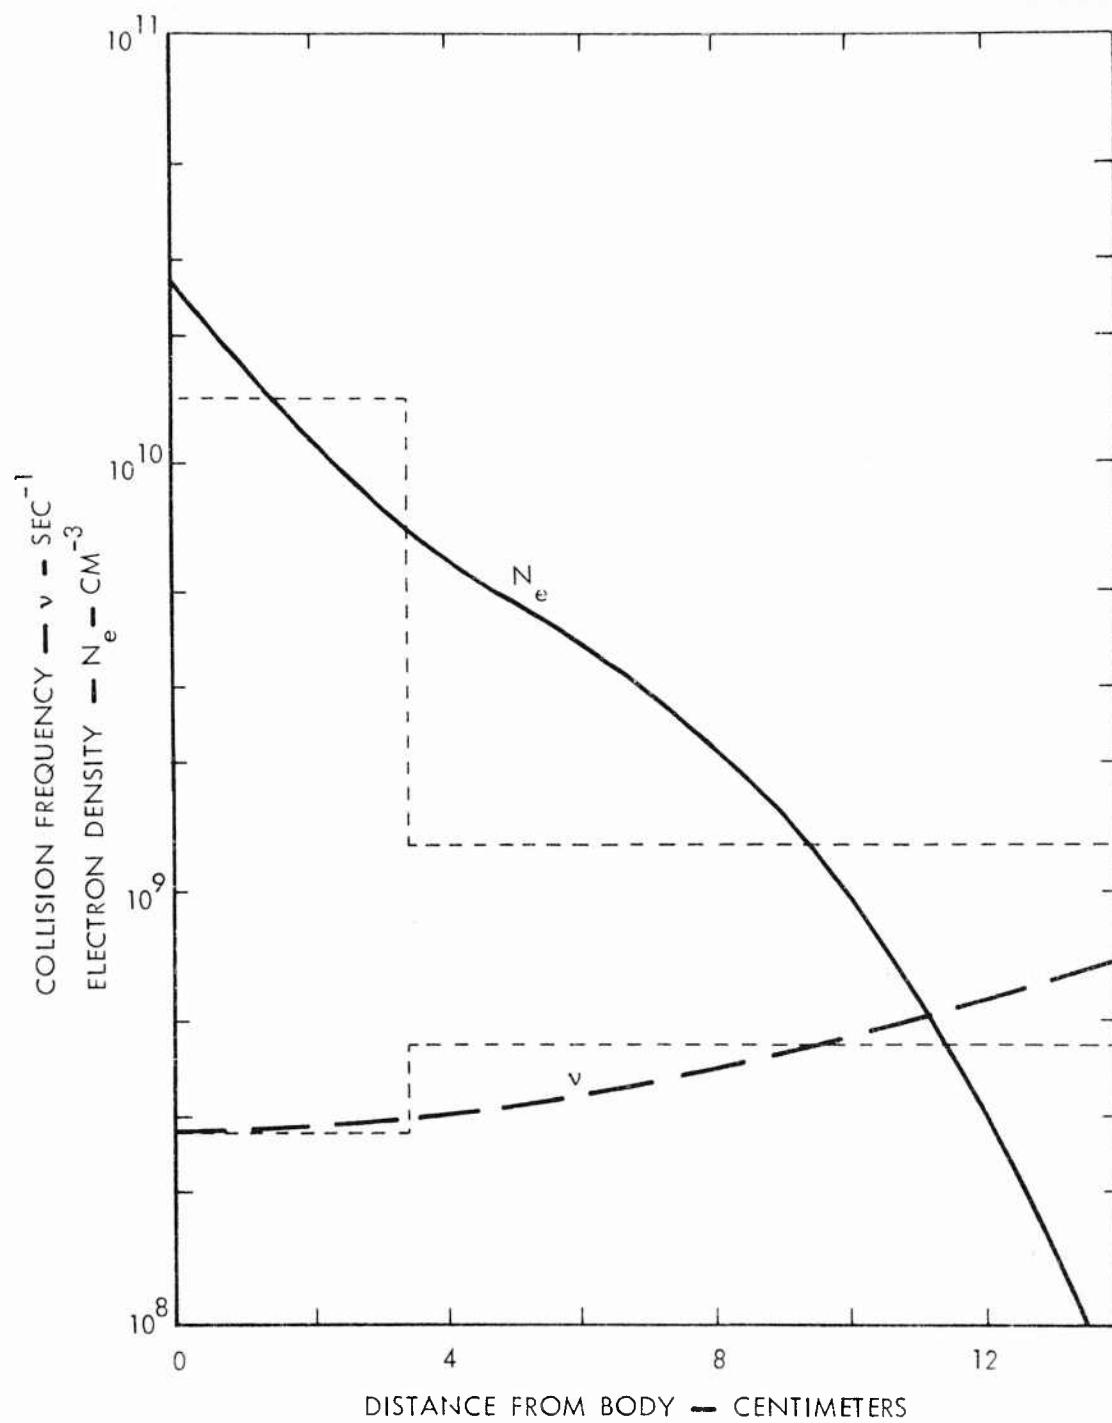


Figure 7. Profile of Electron Density and Collision Frequency and the Two Layer Approximation.  
Velocity of 17.5 K FPS and Altitude of 200 K Ft

3-1-0427

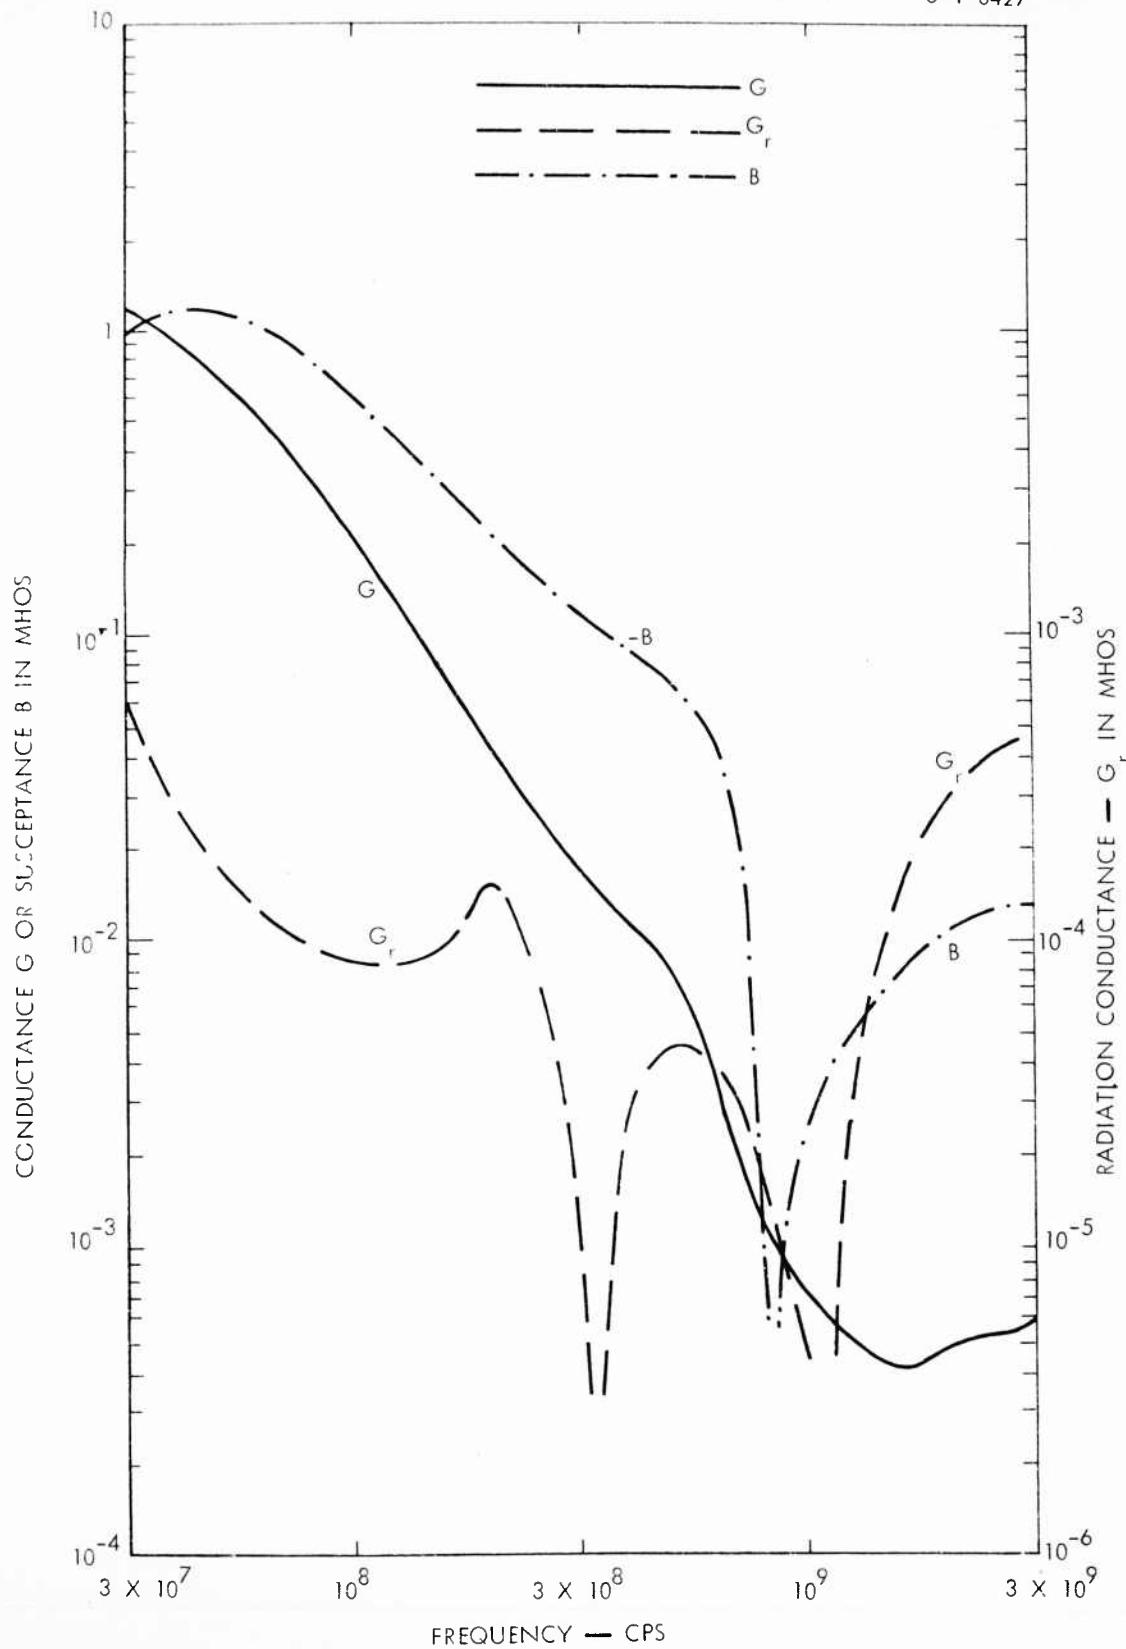


Figure 8. Slot Admittance for a Two Layer Approximation of a Re-entry Plasma Profile

the outer layer is highly lossy ( $1 \leq \tan \delta_1 \leq 100$ ). The calculated slot admittance is shown in Figs. 9 to 11, for various distances  $z_2$  between the slot and the lossy layer. For a given thickness ( $z_1 - z_2$ ) of the lossy layer the losses and  $G$  are highest for  $z_2$  small, but the radiation conductance  $G_r$  is essentially constant over a range of  $z_2$  and ( $z_1 - z_2$ ) values. For very thin lossy layers the capacitive susceptance  $B$  approaches the free space value  $B$  of Fig. 4 for  $z_2$  small. For thick highly lossy layers ( $\tan \delta = 100$ )  $B$  is highest for  $z_2$  small.

The above waveguide model provided convenient means for analyzing slot and plasma or dielectric configurations that would appear untractable in more exact geometries. The susceptance and loss computations can be justified either by reasoning that distant guide walls do not perturb near fields of the slot or by comparing the admittance in the limit of very thick or thin plasma layers with known results for a homogeneous half space or free space. The dimensions of the large guide may be also selected in such a way that the calculated radiation conductance agrees in the same limiting cases with known results. There are no other solutions for the intermediate range of layer thicknesses for the annular slot. However, for rectangular slots there are comparable solutions for waveguides and for inhomogeneous half space [Galejs, 1963a,b].

#### ACKNOWLEDGMENT

Appreciation is expressed to Mr. D.A. Breault of Sylvania's Applied Research Laboratory for computer programming. This research was sponsored by the Air Force Cambridge Research Laboratories, Office of Aerospace Research, under Contract No. AF19(628)-2410.

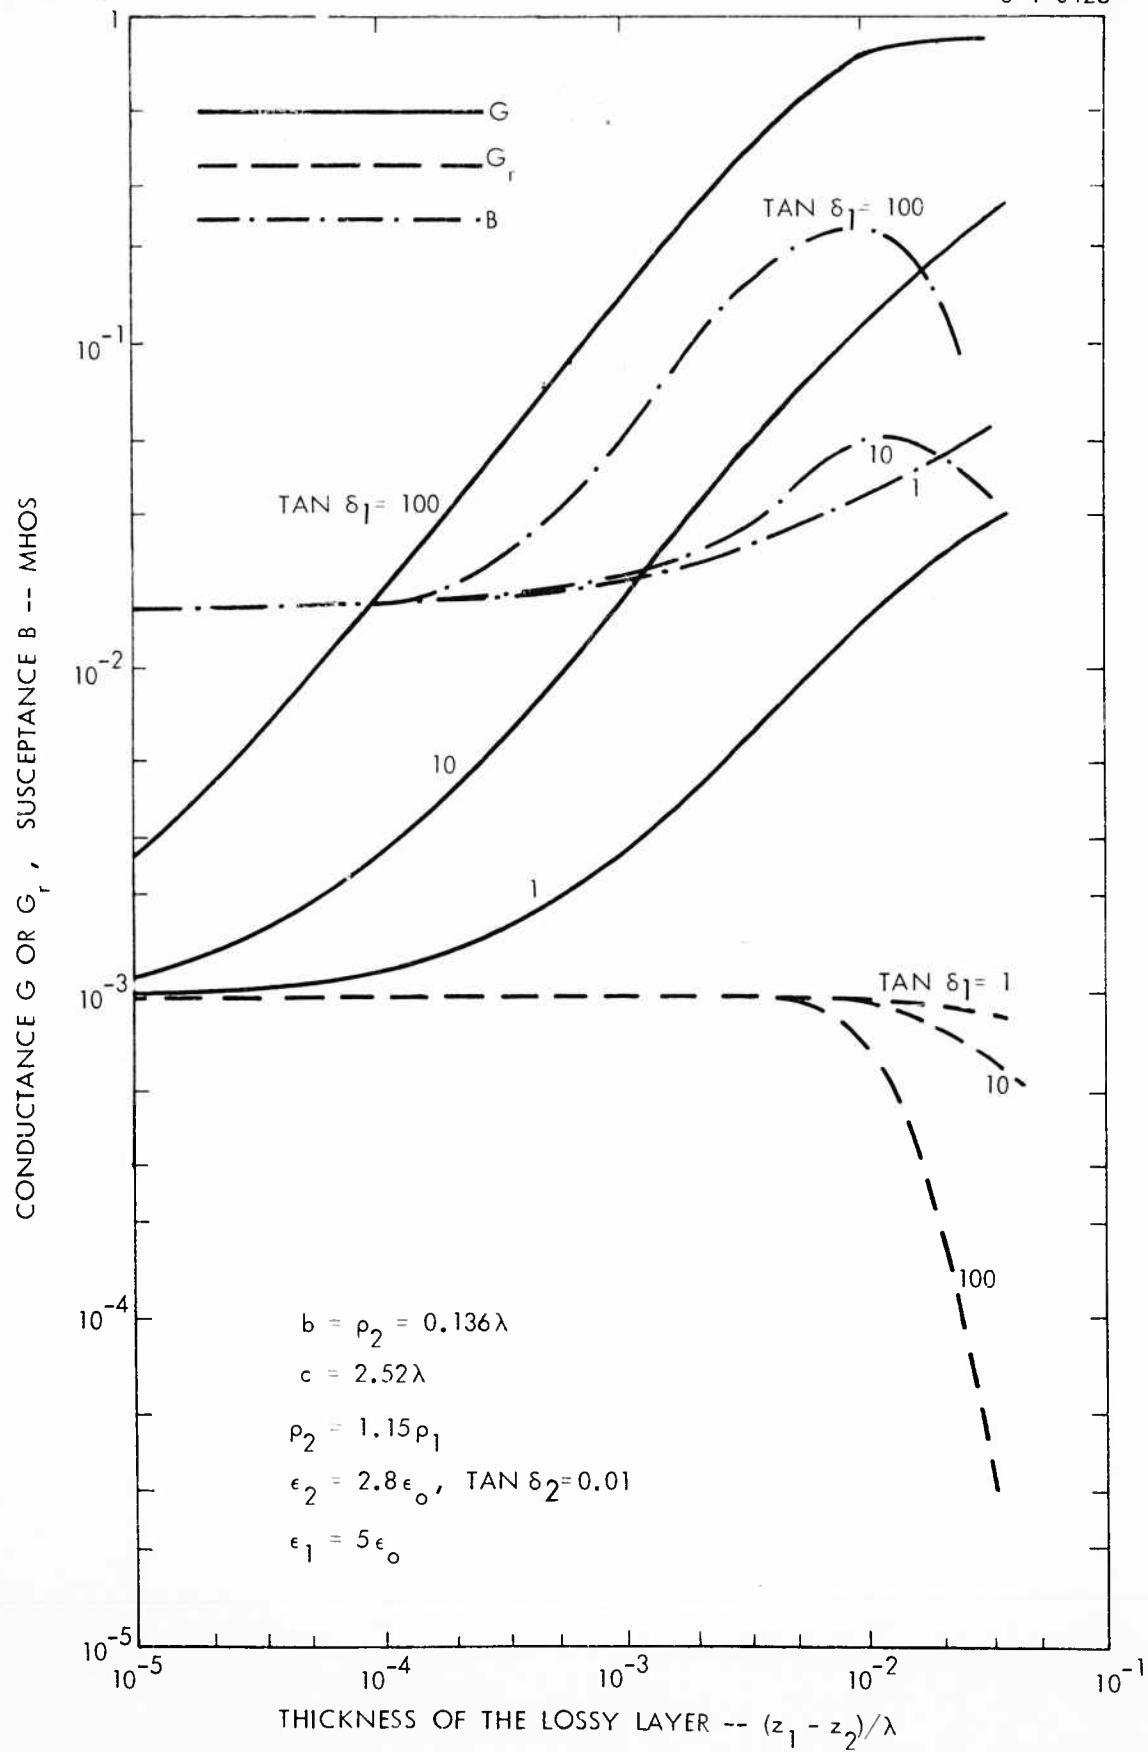


Figure 9. Admittance of a Slot Covered by Lossy Dielectric at a Distance  $Z_2 = 3 \times 10^{-4} \lambda$

3-1-0429

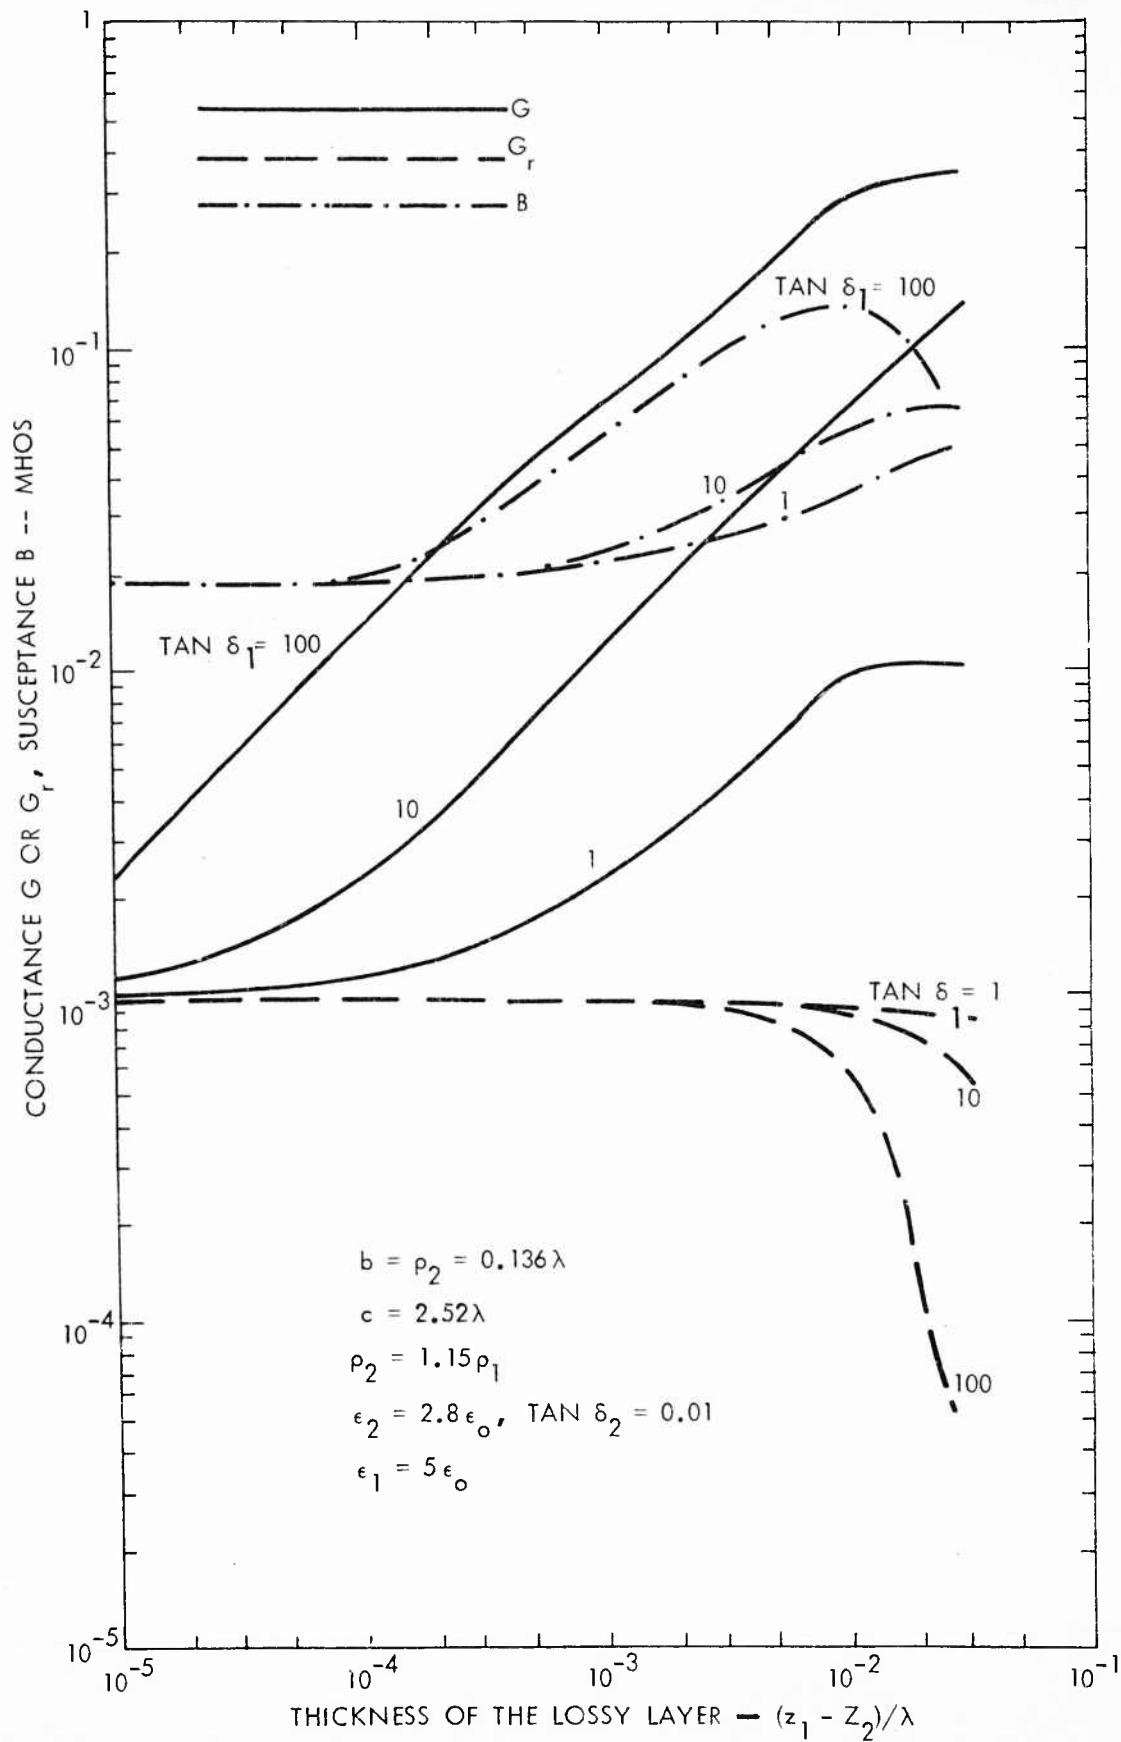


Figure 10. Admittance of a Slot Covered by Lossy Dielectric at a Distance  $Z_2 = 3 \times 10^{-3}\lambda$

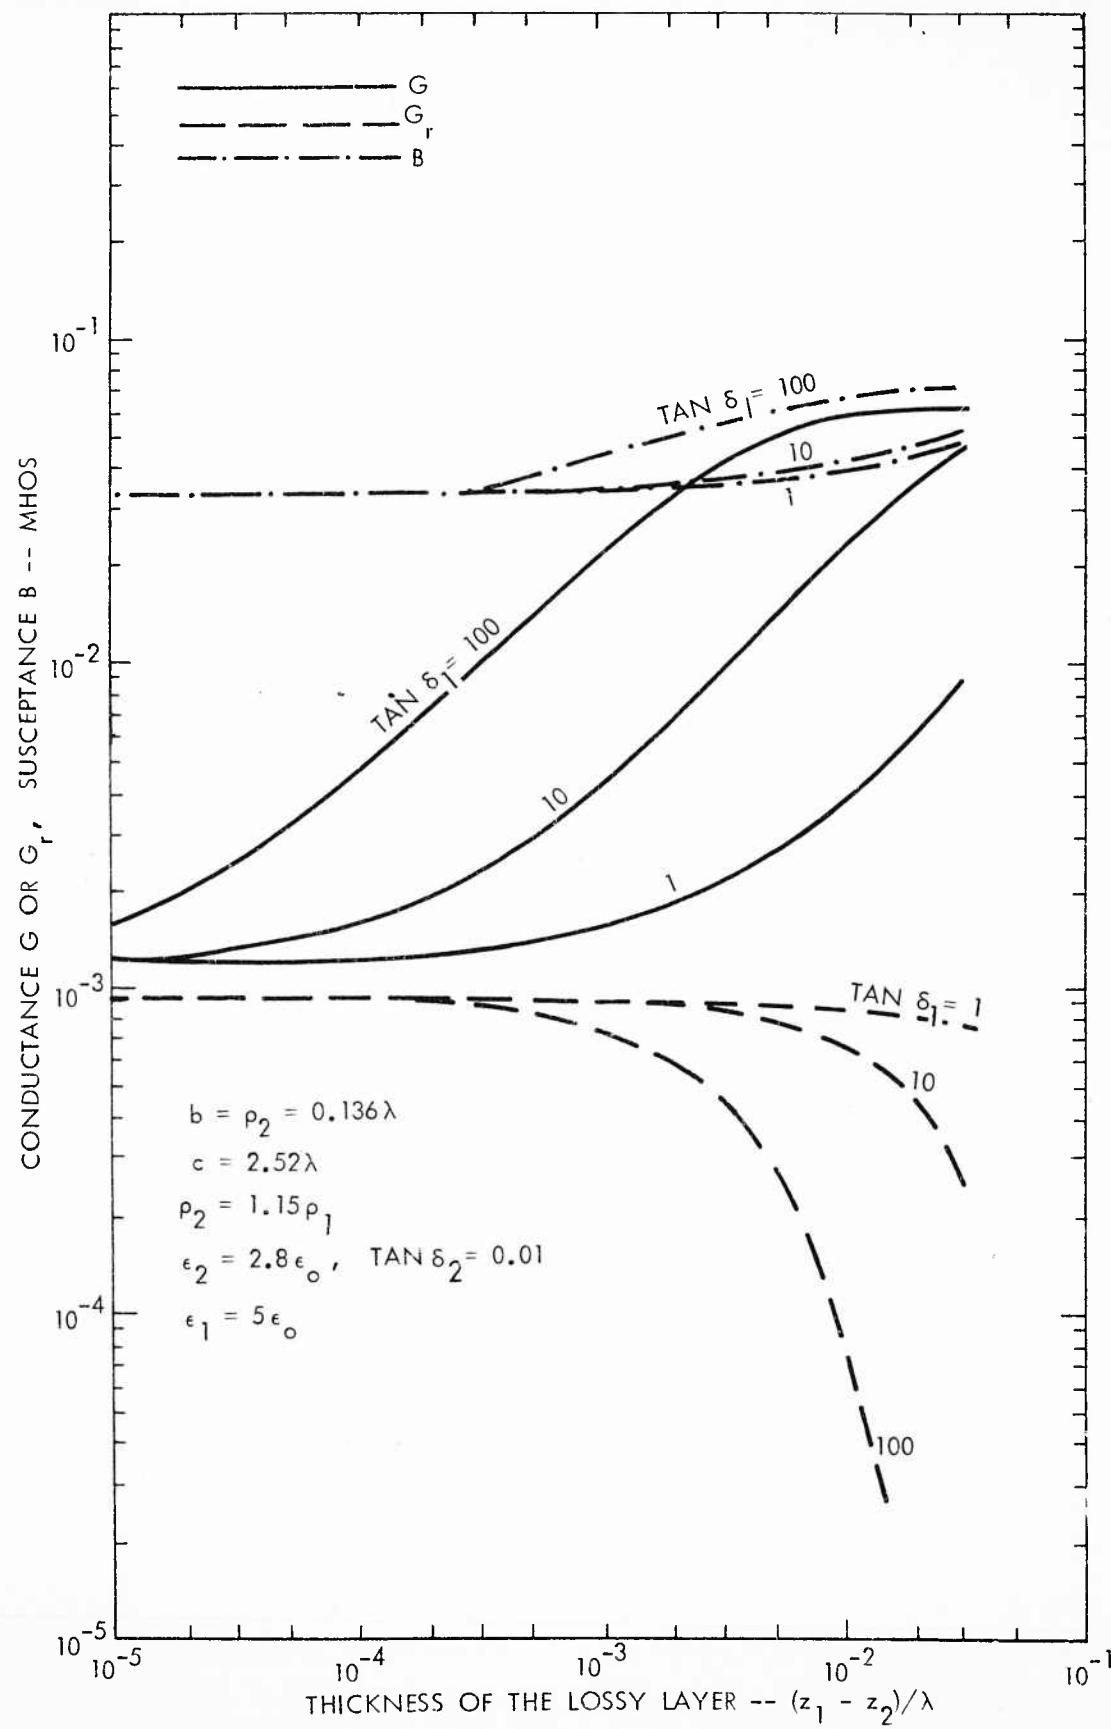


Figure 11. Admittance of a Slot Covered by Lossy Dielectric at a Distance  $Z_2 = 3 \times 10^{-2}\lambda$

## REFERENCES

1. Cohn, G.I., and G.T. Flesher, "Theoretical radiation pattern and impedance of a flush-mounted coaxial aperture," Proc. National Electronics Conference, vol. 14, pp. 150-168, 1958.
2. Galejs, J., and T.W. Thompson, "Admittance of a cavity-backed annular slot antenna," IRE Transactions on Antennas and Propagation, vol. AP-10, No. 6, November, 1962.
3. Galejs, J., "Slot antenna impedance for plasma layers," Research Report No. 346, Applied Research Laboratory, Sylvania Electronic Systems, June, 1963a.
4. Galejs, J., "Admittance of a waveguide radiating into stratified plasma," Research Report No. 347, Applied Research Laboratory, Sylvania Electronic Systems, June 6, 1963b.
5. Levine, H., and C.H. Papas, "Theory of circular diffraction antenna," J. Appl. Phys., vol. 22, pp. 29-43; January, 1951.
6. Rotman, W., and G. Meltz, "Experimental investigation of the electromagnetic effects of re-entry," Report AFCRL 87, U.S. Air Force Cambridge Research Laboratories, Bedford, Massachusetts, March, 1961.
7. Wait, J.R., "A low-frequency annular-slot antenna," J. Res. NBS, vol. 60, pp. 59-64; January, 1958.

The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This approximation to the admittance of the slot in an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears particularly good for thin layers of electrically conducting plasma ( $t_e / t_0 \ll 1$  and/or  $\tan \theta \gg 1$ ). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.

Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts.  
 AFCLR-63-395 ADMITTANCE OF ANNUULAR SLOT ANTENNA RADITATING INTO A PLASMA LAYER, Scientific Report, August 1963, 22p. incl. illus., 7 refs.

The slot admittance is calculated for a slot radiating into a plasma of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears particularly good for thin layers of electrically contrasting plasma ( $\epsilon_r$  of 1 and/or tan $\delta$  > 1). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.

Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts. AFCLR-63-395 ADMITTANCE OF ANULAR SLOTTED ANTENNAS RADIATING INTO A PLASMA LAYER, Scientific Report, August 1963, 22p. incl. Unclassified Report illus., 7 refs.

The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10<sup>3</sup>. The radius of the waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are increased by increasing plasma thickness. This approximate calculation appears particularly good for thin layers of electrically contrasting plasma ( $\epsilon_r^s \epsilon_0 / \epsilon_r^p \epsilon_0 \gg 1$  and/or  $t^s \gg l$ ). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wider rectangular waveguide.

1. Slot Antennas	I. Contract No. AF19(62B)-2410
2. Slot Admittance	Project No. 4642
3. Plasma Layers	Task No. 464202
4. Reentry Communication Systems	Applied Research Laboratory
5. Layers of Lossy Dielectric	Sylvania Electronic Systems,
Stratified Plasma	40 Sylvan Road, Waltham, Mass. 02254
	J. Galrels
	Secondary Report No. S-304G- .
	In DDC Collection .

For Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts.  
CNR-63-395 ADMITTANCE OF ANNIHILATOR SLOTTED ANTENNA RADIATING INTO PLASMA LAYER, Scientific Report, August 1963. 22P. incl. Unclassified Report plus, 7 refs.

Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts.  
AFRL-63-395 ADMITTANCE OF ANULAR SLOT ANTENNAS RADIATING INTO A PLASMA LAYER, Scientific Report, August 1963.  
Unclassified Report  
1 illus., 7 refs.

The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma ( $\epsilon_r^{\text{air}}/\epsilon_r^{\text{plasma}} > 1$ ) and/or tan  $\theta > 1$ ). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wider rectangular waveguide.

Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts.  
 AFRL-63-395 ADMITTANCE OF ANULAR SLOT ANTENNA RADITATING INTO A PLASMA LAYER, Scientific Report, August 1963, 22P-1, Unclassified Report illus., 7 refs.

The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma ( $\epsilon_0$  and or tan  $\theta \gg 1$ ). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.

<p>Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts. AFRL-63-395 ADMITTANCE OF ANNULAR SLOT ANTENNAS RADIATING INTO A PLASMA LAYER, Scientific Report, August 1963. 22P, incl. illus., 7 refs.</p> <p>The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma (<math>\epsilon_r \gg 1</math> and/or <math>\tan \delta \gg 1</math>). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.</p>	<p>Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts. AFRL-63-395 ADMITTANCE OF ANNULAR SLOT ANTENNAS RADIATING INTO A PLASMA LAYER, Scientific Report, August 1963. 22P, incl. unclassified report. illus., 7 refs.</p> <p>The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma (<math>\epsilon_r \gg 1</math> and/or <math>\tan \delta \gg 1</math>). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.</p>
<p>Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts. AFRL-63-395 ADMITTANCE OF ANNULAR SLOT ANTENNAS RADIATING INTO A PLASMA LAYER, Scientific Report, August 1963. 22P, incl. illus., 7 refs.</p> <p>The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma (<math>\epsilon_r \gg 1</math> and/or <math>\tan \delta \gg 1</math>). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.</p>	<p>Air Force Cambridge Research Laboratories, Office of Aerospace Research, Laurence G. Hanscom Field, Bedford, Massachusetts. AFRL-63-395 ADMITTANCE OF ANNULAR SLOT ANTENNAS RADIATING INTO A PLASMA LAYER, Scientific Report, August 1963. 22P, incl. unclassified report. illus., 7 refs.</p> <p>The slot admittance is calculated for a slot radiating into a waveguide of radius 5 to 10. The radius of the wide waveguide is selected so that the slot admittance is equal to the admittance for a semi-infinite half space in absence of plasma. This slot admittance is an approximation to the admittance of an inhomogeneous half space in presence of a plasma layer. The calculated slot susceptance is shown to be nearly constant for various thicknesses of the plasma layer, while the slot conductance and radiation conductances are decreased by increasing plasma thickness. This approximate calculation appears to be particularly good for thin layers of electrically contrasting plasma (<math>\epsilon_r \gg 1</math> and/or <math>\tan \delta \gg 1</math>). The calculations indicate an admittance similar to that of earlier calculations for a rectangular slot radiating into a wide rectangular waveguide.</p>