

AD-A094 351

NAVAL RESEARCH LAB WASHINGTON DC F/G 20/5  
EXPERIMENTAL EXAMINATION OF THE ENHANCEMENT OF GYROTRON EFFICIENCY--ETC(U)  
FEB 81 N E READ, K R CHU, A J DUDAS DE-AI01-79-ET-52053  
UNCLASSIFIED NRL-MR-4169 NL

1 of 1  
AD-A094 351



END  
DATE  
FILMED  
2-81  
DTIC



14  
NRL-MR-4169

9 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 4169	2. GOVT ACCESSION NO. AD-A094351	3. RECIPIENT'S CATALOG NUMBER
6 4. TITLE (and Subtitle) EXPERIMENTAL EXAMINATION OF THE ENHANCEMENT OF GYROTRON EFFICIENCIES BY USE OF PROFILED MAGNETIC FIELDS.	5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) 10 M.E. Read, K.R. Chu, A.J. Dudas		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, DC 20375		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DE-AI01-79ET52053 67-0865-0-0
11. CONTROLLING OFFICE NAME AND ADDRESS Department of Energy Washington, DC 20545		12. REPORT DATE 11/4 February 1981
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 12 23		13. NUMBER OF PAGES 21
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES  *Present address: JAYCOR, Alexandria, VA		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Gyrotrons Cyclotron Maser mic Waves		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An experiment in which the enhancement of the efficiency of gyrotron oscillators through profiling of the magnetic field at the cavity is discussed. Electronic efficiencies to 65 percent were obtained, with power levels of 1-100 kW at 35 GHz. Satisfactory agreement with theory was found.  K. Kowalski		

CONTENTS

INTRODUCTION . . . . . 1  
DESCRIPTION OF THE EXPERIMENT . . . . . 1  
CALCULATION OF THE ELECTRONIC EFFICIENCY . . . . . 2  
RESULTS . . . . . 3  
COMMENTS . . . . . 5  
CONCLUSIONS . . . . . 6  
ACKNOWLEDGEMENTS . . . . . 6  
REFERENCES . . . . . 8

A

## EXPERIMENTAL EXAMINATION OF THE ENHANCEMENT OF GYROTRON EFFICIENCIES BY USE OF PROFILED MAGNETIC FIELDS

### Introduction

The gyrotron has become a very promising source for high power mm wave radiation. To date with gyrotron oscillators (gyromonotrons) a power of 212 kW has been obtained on a CW basis at 28 GHz<sup>(1)</sup>, and 1 MW on a pulsed basis at 100 GHz.<sup>(2)</sup> Extrapolations to CW Megawatt operation at  $\geq 100$  GHz appear possible.<sup>(3)</sup> For the primary application presently foreseen for this type of device (electron cyclotron heating in magnetically confined fusion devices),<sup>(4,5)</sup> efficiency will be of critical importance. Present devices appear to be limited to efficiencies of less than 50% even with the use of tapered cavity walls.<sup>(1,2)</sup> Recently methods have been proposed for increasing the efficiency to  $\sim 70\%$  through profiling of the magnetic field impressed on the cavity. One method utilizes a stepwise profile<sup>(6)</sup> the other a linear profile.<sup>(7)</sup> Both methods predict comparable efficiencies, but the latter appears to be more readily realized in practice. We report in this paper a series of experiments which verify the latter theory.

### Description of the Experiment

The experiments were performed at a frequency of 35 GHz, using the apparatus shown in Figure 1. The configuration was similar, with the exception of the provisions for tapering the magnetic field, to other gyrotron oscillators.<sup>(1,8)</sup> The cavity was right circular, and supported the  $TE_{011}$  (circular) mode. In order to thoroughly examine the theory, four cavities of different lengths<sup>(6)</sup> were tried in the experiments. Their parameters are shown in table 1.

The electron gun used had a nominal operating voltage of 70 kV, producing a monoenergetic beam with a theoretically predicted<sup>(9)</sup> perpendicular to parallel velocity ratio ( $\alpha$ ) of 1.5 - 1.8. We note that only the energy associated with electron motion perpendicular to the magnetic field is accessible for transfer to the output waves. Therefore,  $\alpha$  will determine the ultimate maximum efficiency. For  $\alpha = 1.8$ , the maximum efficiency achievable is 63 percent.<sup>(7)</sup>

Manuscript submitted September 24, 1980.

Measurement of the output power was performed by converting the  $TE_{01}$  circular output into the  $TE_{10}$  rectangular mode, employing a commercial mode transducer,<sup>(10)</sup> and using a calibrated directional coupler and precision attenuator to reduce the power level to where it could be sensed with a calibrated crystal. This method has been previously checked using a calorimeter, and found to be accurate to  $\pm 5\%$ . The frequency was measured using a conventional wavemeter.

The main (unperturbed) applied magnetic field was produced by a system of superconducting solenoids, and on axis had a profile as shown in figure 1. The unperturbed field over the length of the cavity was uniform to better than  $\pm 0.5\%$ .

The profiling of the applied magnetic field in the cavity region was accomplished by either shaped collars of steel (figure 2) or active coils. (The collars were used for the short cavities where strong gradients were required). Typical field perturbations produced by these methods are shown in figures 2 and 3. (The profile shown in figure 3 was produced by a coil in which the direction of winding was reversed at the center). For most of the experiments the total applied magnetic field in the cavity region increases approximately linearly along the direction of the electron beam propagation.

#### Calculation of the Electronic Efficiency

In order to compare unambiguously with the theory, which assumes the RF field profile of a closed end cavity, the reflection at the output end of the cavity was made large, resulting in a relatively large output Q and consequently low radiated power. Thus ohmic losses in the circuit become substantial factors in inferring the electronic efficiency ( $\eta_e$ ), defined as the fraction of beam power deposited to the wave, from the measured efficiency ( $\eta_m$ ), defined as the ratio of the measured wave power to the beam power. Since the measured power is the deposited power less the circuit losses, we may write

$$\eta_e = \eta_m \left[ A \left( 1 - \frac{Q_L}{Q_\Omega} \right) \right]^{-1}$$

where  $\eta_m$  is the measured value of the output power normalized to the beam power.  $Q_L$  is the loaded (total) Q,  $Q_\Omega$  is the ohmic Q of the cavity and A accounts for the loss in the output guide mode converter. A was determined by measurement to be  $\approx 0.8$ , and typically  $\eta_m/\eta_e$  ranged from approximately 0.5 to .7 depending on the cavity used.

### Results

All of the cavities oscillated in the  $TE_{011}$  mode, identifiable by the frequency of the radiation. The nearest competing mode was found in the longest cavity, where the frequency of the  $TE_{012}$  mode was found to be 35.13 GHz, as apposed to 34.97 GHz for  $TE_{011}$ .

Of primary interest was the behavior of the efficiency as a function of  $\Delta B/B$ , defined as the percent increase in B over the length of the cavity. This is shown in figure 3, along with the theoretically predicted behavior. The following observations can be made: (1) Electronic efficiencies of up to 65% were obtained, (2) Enhancements of the efficiency and power (from the uniform field cases) of up to 1.9 were obtained and (3) The agreement of experiment and theory is good for  $\Delta B/B \leq 7\%$ .

The reason for the fall-off of the efficiency prematurely with  $\Delta B/B$  (evident for the shorter cavities) is most likely caused by a degradation in the electron beam due to the influence on the electron gun of the residual fields from the taper producing coils or iron pieces. The influence of small (on the order of one percent) changes in the gun fields cannot be simply predicted, as the electron beam parameters are complicated functions of these fields. Studies are in progress to examine the problem. Restraints on the length of the distance from the cavity to the gun made it impossible to reduce the fields

at the gun in the present experiment. These restraints do not appear to be fundamental, and should be able to be eliminated in future designs.

There has been some conjecture that a field profile with negative slope also produce an enhancement of efficiency, since the change in field could potentially restore losses of coherence between the beam and waveguide modes caused by reduction in the beam energy as it transverses the cavity. (The coherence is given by  $\omega - k_{11} \cdot v_{11} - \frac{\Omega_c}{\gamma}$ , where  $k_{11}$  is the axial wave number,  $v_{11}$  the axial electron velocity,  $\Omega_c$  the classical cyclotron frequency, and  $\gamma$  the relativistic mass factor). However, our calculations indicated little support for this conjecture. Subsequent experiments also indicate only slight improvement in the efficiency with this type of profile.

During the experiments another phenomenon, of use in understanding the basic physics of the cyclotron maser, was observed. The effect is illustrated in a plot of efficiency versus beam current for the cavity with  $L/\lambda = 9.2$ . (Fig.5) Both the experimental points and theoretical curves are given. Qualitative agreement between theory and experiment is evident. Initial investigations indicate that the lack of good quantitative agreement in the magnitude of the efficiency for currents  $\gg 0.1A$  is due to velocity spread on the beam. Both theory and experiment show the efficiency as a double peaked function of the current. This is apparently due to the trapping of the electron bunches, a phenomenon predicted by Sprangle and Drobot.<sup>(11)</sup> Trapping is the dominant limit on the efficiency of the cyclotron maser. It occurs as the RF fields become strong enough to "pull" some of the electrons out of the phase where they give up energy to the wave. With further increased RF fields (produced by increased beam current) the electrons undergo a 360 degree phase change as they traverse the cavity and, subsequently, a substantial fraction of their energy is transferred to the waveguide mode. This is shown more clearly in figures 6 a, b, and c. These figures are computer calculated plots of the



average electron energy loss (normalized to the initial electron energy) as a group of electrons traverses a cavity with predetermined RF fields. The value of this normalized loss at the end of the cavity is then the efficiency. Figure 6a is for the case for  $I = 0.1$  amperes, while 6b is for  $I = 1.0a$ , and 6c for  $I = 1.5a$ . For  $I = 0.1a$ , we note that the energy loss is monotonic as the particles drift through the cavity. Trapping occurs at the end of the cavity. At  $I = 1.0a$ , the Rf fields are stronger, and trapping occurs earlier, causing some of the electrons to regain energy. The resulting efficiency is therefore much lower. At  $I = 1.5a$ , the Rf fields are strong enough such that the electrons go through a complete cycle - losing, gaining, then losing again their energy. The resulting efficiency is similar to that with  $I = 0.1a$ .

This is the first time that this phenomenon has been reported in the cyclotron maser oscillator, and appears to confirm an important element of the theory which explains the saturation mechanism for this instability.

#### Comments

For the cavities with  $L/\lambda = 7.3$ , and  $L/\lambda = 9.2$ , we note that the 65 percent overall (electronic) efficiency means that, with an  $\alpha$  of 1.8, 85 percent of the power in the beam available to the interaction has been extracted.

(Only the power associated with the perpendicular motion of the electrons is accessible).<sup>(11)</sup> Further improvement in the efficiency can come from improving this figure, or by increasing the velocity ratio ( $\alpha$ ). Refinement of the magnetic profile may help to achieve the former. As to the latter, the present state of the art in gun design appears to yield  $\alpha \approx 2$ .<sup>(9,12,13)</sup> If guns with an  $\alpha$  of 2.5 can be produced, calculations<sup>(7)</sup> show that a gyrotron with an efficiency of 78 percent should be possible.

The cavities used in this study produced relatively low powers (1-100 kW), due to the large output Q chosen. In order to produce substantially higher powers, it will be necessary to use lower output Q's and/or higher order cavity modes.<sup>(3,7)</sup> Both of these methods can reduce cavity losses to the order of a

few percent of the output power. Studies of these methods are currently in progress.

The usefulness of magnetic tapering for efficiency enhancement at higher frequencies will be limited by the field gradients that can be produced. The required gradient,  $dB/dz$ , scales as  $f^2$  (assuming operation at the fundamental cyclotron frequency). For high power devices, cavity lengths on the order of  $L/\lambda = 5$  are desirable.<sup>(3)</sup> The 10% value for  $\Delta B/B$  which appears to be necessary requires a gradient of 300 Gauss/cm at 35 GHz, and 3.0 kG/cm at 110 GHz. Gradients to approximately 3-5 kG/cm appear feasible with present generation superconducting magnets. Therefore, the use of this method appears feasible in the frequency regime of interest for many fusion devices. The method can be used at even higher frequencies if cyclotron harmonic interaction<sup>(14)</sup> is employed since the magnetic field required for these cases is reduced by the inverse of the harmonic number.

#### Conclusions

We have shown that magnetic field profiling can enhance the efficiency by a factor of 1.5 - 1.9. As a result, an electronic efficiency of 65% has been demonstrated, the highest gyrotron efficiency reported so far. The method should be feasible to frequencies of 110-150 GHz for the first cyclotron harmonic and 220-300 GHz for the second cyclotron harmonic, using presently available superconductor magnet technology. The increases observed should be applicable to existing devices, and such use should be able to achieve substantial increases of 1.5 to 1.9 in both their efficiency and power.

It is expected that this method can be extended to higher power devices by use of lower Q cavities and higher order modes.

#### Acknowledgements

The authors would like to thank Drs. B. Arfin, V.L. Granatstein, and J. Vomvoridis for their helpful comments. This work was sponsored by the Department of Energy, under contract # DE-AI01-79ET52053.

TABLE 1  
CAVITY PARAMETERS ( $\lambda = 8.57\text{mm}$ )

L/ $\lambda$	Measured	Total Q
3.3	2000	
4.9	2900,650	
7.3	1300	
9.2	3500	

## References

1. J.F. Shively, P. Ferguson, H.R. Jory, J. Moran, and R.S. Symons, "Recent Advances in Gyrotrons," Conf. Digest, IEEE's International Microwave Symposium, May 1980 P.99.
2. A.V. Gaponov, V.A. Flyagin, A. Sh. Fix, A.L. Gol'denberg, V.I. Khizhnyak, A.G. Luchinin, G.S. Nusinovich, M.I. Petelin, Sh. Ye. Tsimring, V.G. Usov, S.N. Vlasov, and V.K. Yulpatov, "Some Perspectives on the Use of Powerful Gyrotrons For the Electron Cyclotron Heating in Large Tokamaks," IV International Conference on Infrared and Near Millimeter Waves, (Dec. 1979).
3. M.E. Read, K.R. Chu, and K.J. Kim, "Power Limits in Cylindrical Gyromonotrons Using  $TE_{0n1}$  Modes," Submitted to International Journal of Infrared and mm Waves.
4. R.M. Gilgenbach et al. "Heating at the Electron Cyclotron Frequency in the ISX-B Tokamak," Phys. Rev. Letters, 44, 10 (1980).
5. V.V. Alikeev et al, Fiz. Plasma 2, 390 (1976). Sov. J. Plasma Physics 2, 212 (1976).
6. P. Sprangle and R.A. Smith, "The Non Linear Theory of Efficiency Enhancement in the Electron Cyclotron Maser," NRL Memorandum Report 3983, (1979).
7. K.R. Chu, M.E. Read, and A.K. Ganguly, "Methods of Efficiency Enhancement and Scaling for the Gyrotron Oscillator," IEEE Trans. on Microwave Theory and Tech., MTT-28, 4, (1980).
8. M.E. Read, R.M. Gilgenbach, R. Lucey, K.R. Chu, A.T. Drobot, and V.L. Granatstein, "Spatial and Temporal Coherence of a 35 GHz Gyromonotron Using the  $TE_{01}$  Circular Mode", to be published, IEEE Trans. on Microwave Theory and Tech., (1980).
9. J.L. Seftor, K.R. Chu, and A.T. Drobot, "An Investigation of a Magnetron Injection Gun Suitable for Use in Cyclotron Resonance Masers," IEEE Trans. on Microwave Theory and Tech. MTT-27, 9 (1979).

10. Hitachi Denshi. LTD. Model R6414.
11. P. Sprangle and A.T. Drobot, "The Linear and Self Consistent Nonlinear Theory of the Electron Cyclotron Maser Instability," IEEE Trans. on Microwave Theory and Techniques, MTT-25, 6, (1977).
12. J. Shively, C. Conner, H. Jory, D. Stone, R. Symons, G. Thomas, and G. Wendell, Quarterly Rept. #2, 60 GHz and 110 GHz Development Program, Varian Assoc. (ORNL /Sub-21453/2), (1980).
13. K.W. Arnold, J.J. Jancredi, M. Caplan, K.W. Ha, D.N. Birnbaum, and W. Weiss, Quarterly Report #1, Development Program for a 200 kW, CW, 110 GHz Gyrotron, Hughes Aircraft Co., (ORNL/Sub-33200/1) (1979).
14. K.R. Chu, "Theory of Electron Cyclotron Maser Interaction in a Cavity at Harmonic Frequencies," Phys. Fluids 21, 12 (1978).

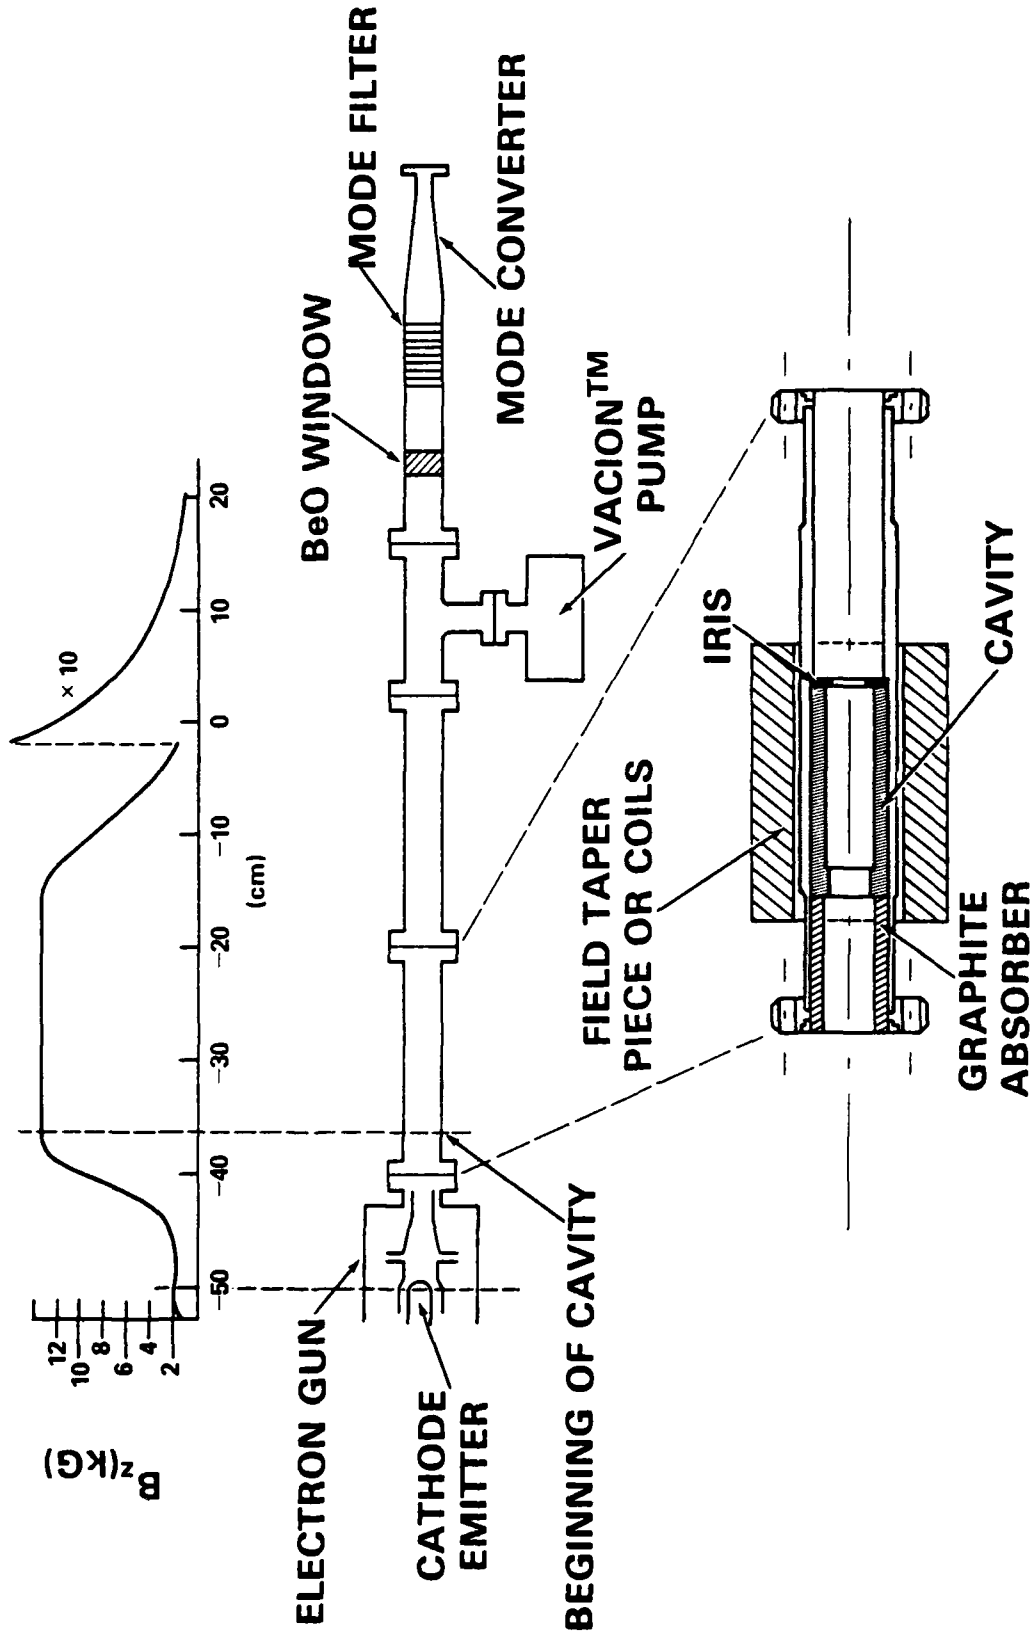


Fig. 1 — Apparatus of the experiment

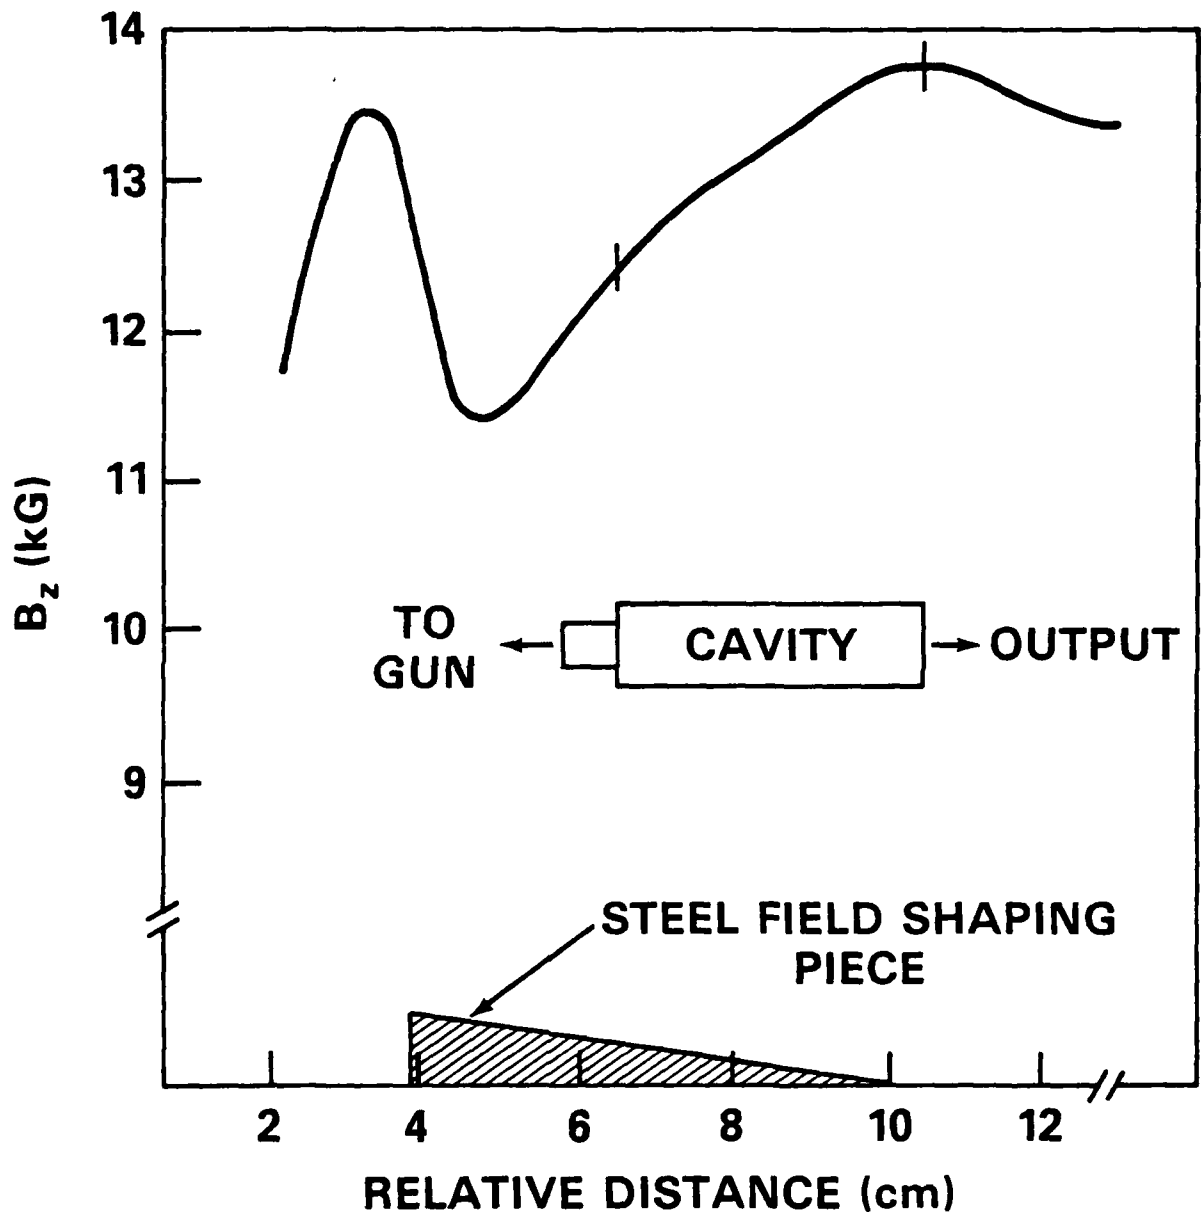


Fig. 2 — Drawing of the field shaping steel collar and the magnetic field resulting from its insertion in the field of the superconducting magnet

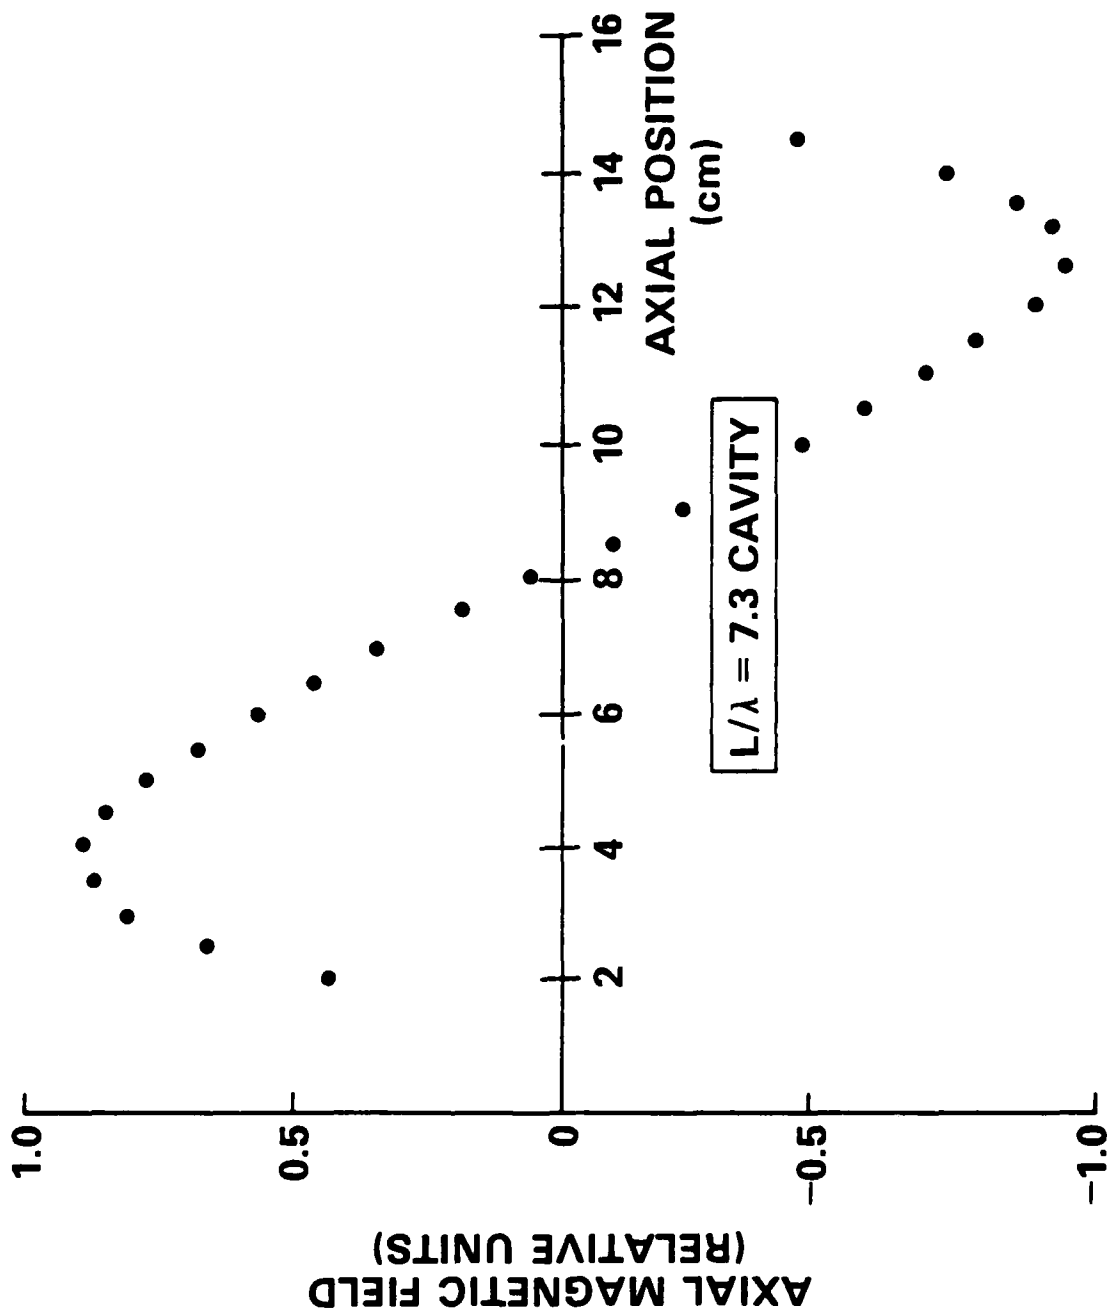


Fig. 3 — Field perturbation produced by the active coils. The coils comprised a solenoid in which the current reversed at the center.



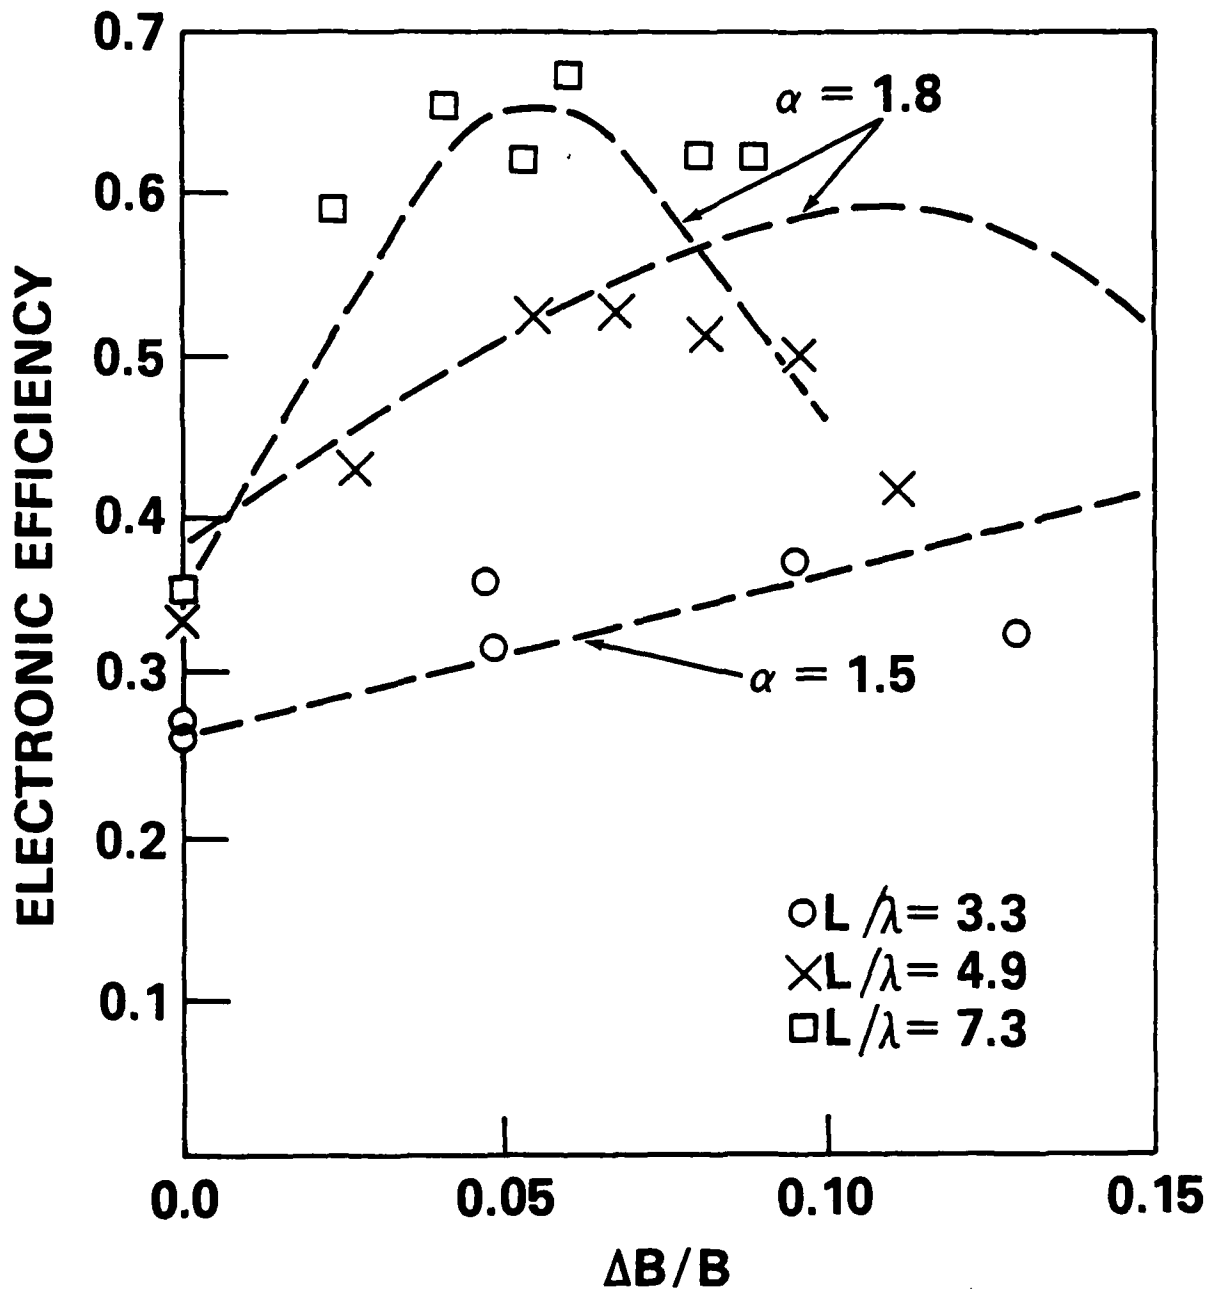


Fig. 4 - Electronic efficiency as a function of the magnetic profile strength,  $\Delta B/B$ , for those cavities of different length  $L$ .  $\lambda = 8.6$  mm.

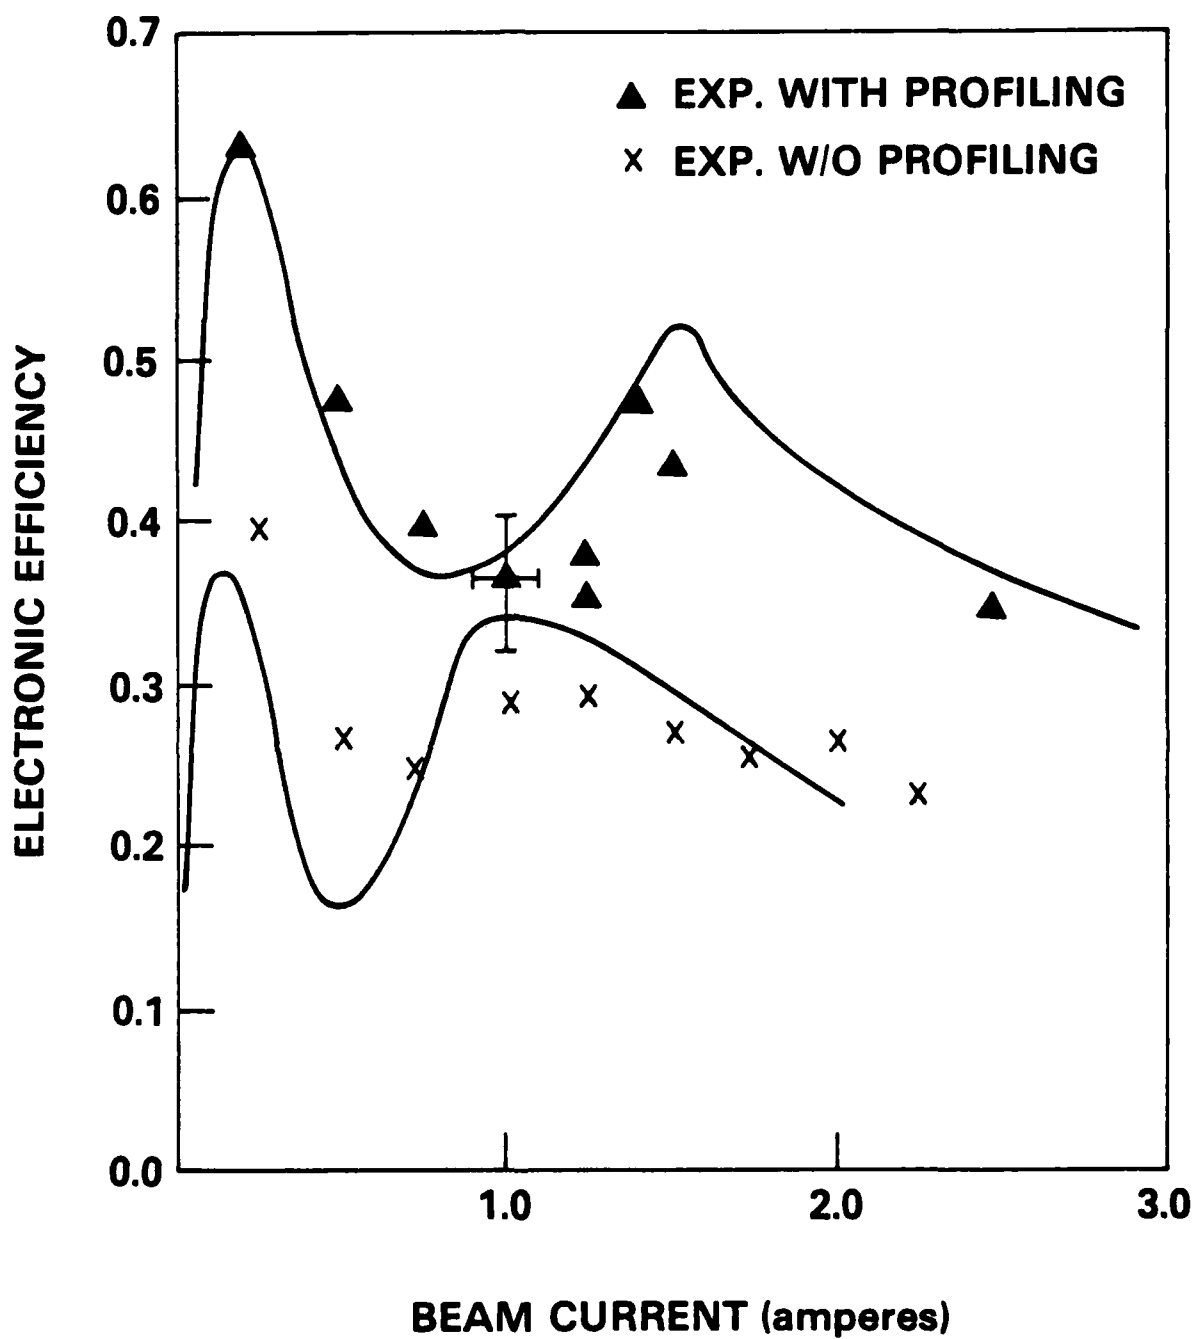


Fig. 5 — Electronic efficiency as a function of the beam current for the cavity with  $L/\lambda = 9.2$ . Experimental and theoretical points for the efficiency with and without optimal magnetic profiling are given.

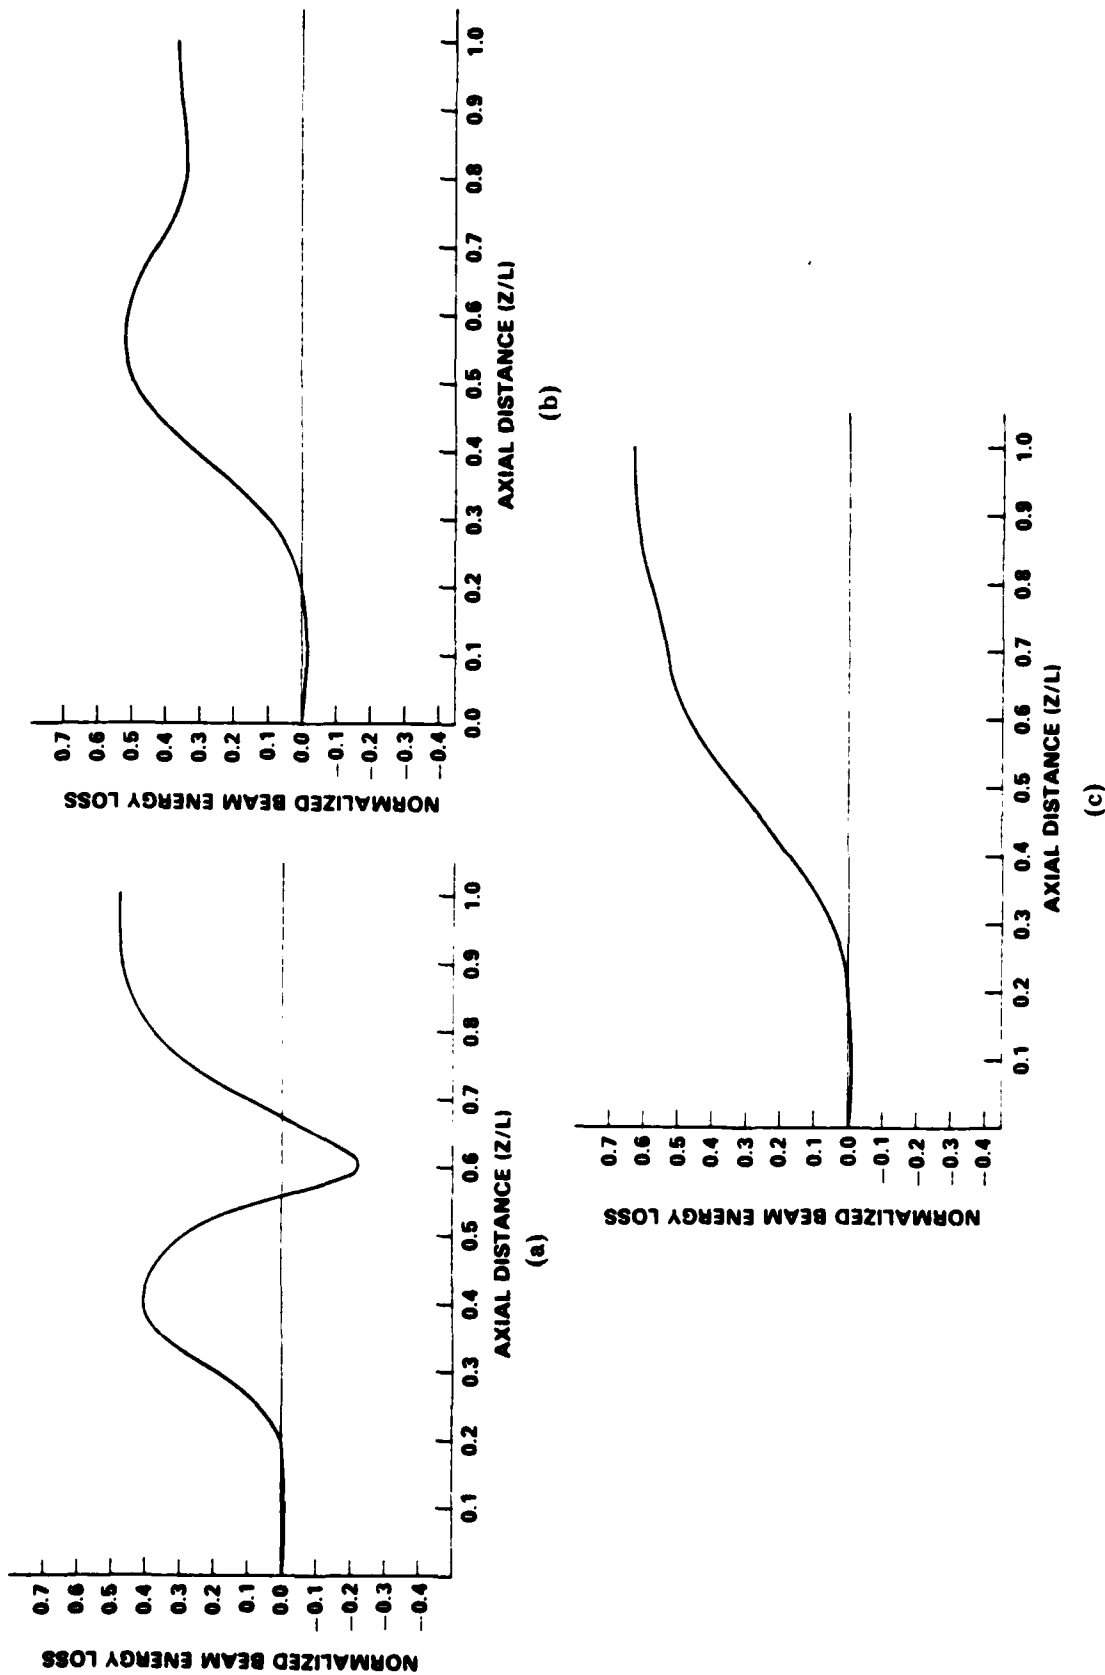


Fig. 6 — Calculated plots of the average energy loss (normalized to the initial energy) of electrons in the beam as they traverse a cavity with  $L/\lambda = 9.2$ . (a) Beam current = 0.1 amp, (b)  $I_b = 1.0$  amp, and (c)  $I_b = 1.5$  amp. A ratio of the perpendicular to parallel electron velocities of 1.8 was used in the calculations.

GYROTRON & ECH DISTRIBUTION LIST

<u>No. of Copies</u>		<u>Addressee</u>
(25)	Naval Research Laboratory	Code: 4700 - Dr. T. Coffey
(26)	Attn: Name/Code	4740 - Dr. V.L. Granatstein
	4555 Overlook Avenue, S.W.	4740 - Dr. R.K. Parker
	Washington, D.C. 20375	4740 - Dr. K.R. Chu
		4740 - Dr. M.E. Read
		4740 - Dr. C.W. Roberson
		4740 - Dr. S. Gold
		4790 - Dr. P.A. Sprangle
		4790 - Dr. B. Hui
		4790 - Dr. W.M. Manheimer
		6850 - Dr. L.R. Whicker
		6853 - Dr. A. Ganguly
		6805 - Dr. S.Y. Ahn
		6805 - N.R. Vanderplaats
		6875 - Dr. R. Wagner
	On-Site Contractors:	Code: 4740 - Dr. J.M. Baird (B-K Dynamics)
		4740 - Dr. L. Barnett (B-K Dynamics)
		4740 - Dr. D. Dialetis (SAI)
		4740 - A.J. Dudas (JAYCOR)
		4740 - Dr. R.M. Gilgenbach (JAYCOR)
		4740 - Dr. K.J. Kim (JAYCOR)
		4740 - Dr. Y.Y. Lau (SAI)
		4740 - Dr. J.S. Silverstein (HDL)
		4790 - Dr. A.J. Drobot SAI
		4790 - Dr. C.M. Hui (JAYCOR)
		4790 - Dr. J. Vomvoridis (JAYCOR)
		5704S - Dr. S. Smith (LOCUS, Inc.)
(3)	Secretary	Dr. P. Stone (G-234)
	Department of Energy	Dr. M. Murphy (G-234)
	Attn:	Dr. J. Willis (G-234)
	Washington, D.C. 20545	
(1)	Air Force Avionics Laboratory	
	Attn: W. Friz	
	Wright/Patterson AFB, Ohio 45433	
(1)	Bell Laboratories	
	Attn: Dr. W.M. Walsh, Jr.	
	600 Mountain Avenue	
	Murray Hill, New Jersey 07971	

No. of Copies

Addressee

- (1) Columbia University  
Department of Electrical Engineering  
Attn: Dr. S.P. Schlesinger  
New York, New York 10027
- (1) Dartmouth College  
Physics Department  
Attn: Dr. John Walsh  
Dartmouth, New Hampshire 03755
- (12) Defense Technical Information Center  
Cameron Station  
5010 Duke Street  
Alexandria, Virginia 22314
- (1) Georgia Institute of Technology  
Engineering Experimental Station  
Attn: Dr. James J. Gallagher  
Atlanta, Georgia 30332
- (3) Hughes Aircraft Co.  
Attn:  
Electron Dynamics Division  
3100 Lomita Boulevard  
Torrance, California 90509
- (1) Los Alamos Scientific Laboratory  
Attn: Dr. Paul Tallerico  
P.O. Box 1663  
Los Alamos, New Mexico 87545
- (1) Massachusetts Institute of Technology  
Research Laboratory of Electronics  
Attn: Dr. G. Bekefi  
Bldg. 36, Rm. 36-225  
Cambridge, Massachusetts 02139
- (3) Massachusetts Institute of Technology  
Plasma Fusion Center  
Attn:  
167 Albany St., N.W. 16-200  
Cambridge, Massachusetts 02139
- (1) Northrop Corporation  
Defense System Department  
Electronics Division  
Attn: G. Doehler  
175 W. Oakton St.  
Des Plaines, Illinois 60018
- (2) Oak Ridge National Laboratories  
Attn:  
P.O. Box Y  
Oak Ridge, Tennessee 37830
- Dr. J.J. Tancredi  
K. Arnold  
K. Amboss
- Dr. R. Davidson  
Dr. M. Porkolab  
Dr. R. Temkin
- Dr. A. England  
M. Loring

No. of Copies

Addressee

- (1) Princeton University  
Plasma Physics Laboratory  
Attn: Dr. H. Hsuan  
Princeton, New Jersey 08540
- (2) Raytheon Company  
Microwave Power Tube Division  
Attn:  
Willow St.  
Waltham, Massachusetts 02154
- (1) Science Applications, Inc.  
Attn: Dr. Alvin Trivelpiece  
1200 Prospect St.  
La Jolla, California 92037
- (1) Stanford University  
SLAC  
Attn: Dr. Jean Lebacqz  
Stanford, California 94305
- (1) University of Arizona  
Optical Sciences Center  
Attn: Dr. W.E. Lamb  
Tucson, Arizona 85720
- (1) Varian Associates  
Bldg. 1  
Attn: Dr. H. Jory  
611 Hansen Way  
Palo Alto, California 94303
- (1) Yale University  
Mason Laboratory  
Attn: Dr. J.L. Hirshfield  
400 Temple Street  
New Haven, Connecticut 06520
- (1) Kings College  
University of London  
Attn: Dr. P. Lindsay  
London, United Kingdom
- (1) Nagoya University  
Institute of Plasma Physics  
Attn: Dr. H. Ikegami  
Nagoya, Japan 464
- (1) National Taiwan University  
Department of Physics  
Attn: Dr. Yui-Chi Hsu  
Taipei, Taiwan, China

No. of Copies

Addressee

- (1) TFR Group  
DPH - PFC  
Attn: Dr. A. Cavallo  
92260 Fontenay-aux Roses  
France
- (1) Thompson  
C.S.F./DET/TDH  
Attn: Dr. G. Mourier  
2 Rue Latecoere  
78140 Velizy Villa conblay  
France
- (1) UKAEA Culham Laboratory  
Attn: Dr. A.C. Riviere  
Abingdon  
Oxfordshire  
United Kingdom