

AD-A115 465

TRANSPORTATION SYSTEMS CENTER CAMBRIDGE MA

F/6 17/9

SUCCESSFUL APPLICATION OF LOW LOSS, OVER-MODED WR-187 WAVEGUIDE--ETC(U)

APR 82 P J PANTANO

DOT-TSC-FAA-81-17

DOT/FAA/RD-81-89


NL

UNCLASSIFIED

1 OF 1
AD-A115 465



END
DATE
FILMED
07-82
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963-A

12

DOT/FAA/RD-81-89
DOT-TSC-FAA-81-17

Systems Research and
Development Service
Washington DC 20590

Successful Application of Low Loss, Over-Moded WR-187 Waveguide to the ASDE-3 Radar

Philip J. Pantano

Transportation Systems Center
Cambridge MA 02142

April 1982
Final Report

This document is available to the public
through the National Technical Information
Service, Springfield, Virginia 22161.

AD A115465

DTIC FILE COPY

DTIC
ELECTE
JUN 11 1982
S D E



U.S. Department of Transportation
Federal Aviation Administration

2

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the object of this report.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	



1. Report No. DOT/FAA/RD-81-89	2. Government Accession No. AD-A115 465	3. Recipient's Catalog No.	
4. Title and Subtitle SUCCESSFUL APPLICATION OF LOW LOSS, OVER-MODED WR-187 WAVEGUIDE TO THE ASDE-3 RADAR		5. Report Date April 1982	
		6. Performing Organization Code DTS-341	
7. Author(s) Philip J. Pantano		8. Performing Organization Report No. DOT-TSC-FAA-81-17	
9. Performing Organization Name and Address U. S. Department of Transportation Transportation Systems Center Kendall Square Cambridge MA 02142		10. Work Unit No. (TRAIS) FA121/R-1135	
		11. Contract or Grant No.	
12. Sponsoring Agency Name and Address U. S. Department of Transportation Federal Aviation Administration Systems Research and Development Service Washington D C 20590		13. Type of Report and Period Covered Final Report April 1979-April 1980	
		14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract Overmoded WR-187 waveguide has been incorporated into the short-range ASDE-3 system to provide a low-loss interconnection between the antenna and the transmitter/receiver. WR-62 to WR-187 transitions and WR-187 mode suppressors were developed specifically for this short-range radar application to provide low loss transmission of 0.01 dB per ft. The 36-nanosecond, 160-dB dynamic range ASDE-3 system is operating without resonance effects down to the required minimum radar range of 500 ft. This report presents pertinent technical detail and briefly describes the testing process.			
17. Key Words Low Loss Rectangular Waveguide Over-moded waveguide WR-187 waveguide ASDE-3 Radar		18. Distribution Statement DOCUMENT IS AVAILABLE TO THE PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22161	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 15	22. Price

Preface

The activity described in this report was performed to provide a low loss waveguide interconnection between the antenna and the transmitter/receiver of the ASDE-3 radar.

The efforts of Frank LaRussa, Transportation Systems Center, and Tore Anderson, A.J. Tuck Company, Brookfield Ct who contributed to the successful completion of this phase of the ASDE-3 program are acknowledged and appreciated.

[illegible]

Approximate Conversions to Metric Measures

Symbol	What You Know	Multiply by	To find	Symbol
<u>LENGTH</u>				
in	inches	12	feet	ft
ft	feet	360	inches	in
yd	yards	3	feet	ft
mi	miles	5,280	feet	ft
<u>AREA</u>				
sq in	square inches	144	square feet	sq ft
sq ft	square feet	100	square yards	sq yd
sq yd	square yards	9	square feet	sq ft
sq mi	square miles	2,577,680	square feet	sq ft
ac	acres	43,560	square feet	sq ft
<u>MASS (weight)</u>				
oz	ounces	16	pounds	lb
lb	pounds	2,000	short tons	ton
	short tons	2,000	tons	ton
<u>VOLUME</u>				
cup	teaspoons	3	tablespoons	tblsp
tblsp	tablespoons	16	fluid ounces	fl oz
fl oz	fluid ounces	32	cups	cup
cup	cups	0.25	quarts	qt
qt	quarts	0.5	gallons	gal
gal	gallons	0.25	barrels	barrel
barrel	barrels	3.785	cubic feet	cu ft
cu ft	cubic feet	7.48	cubic yards	cu yd
<u>TEMPERATURE (exact)</u>				
F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	C

TEMPERATURE (°C)

[illegible]

Approximate Conversions from Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
m	millimeters	0.04	inches	in
cm	centimeters	0.4	inches	in
m	meters	3.3	feet	ft
m	meters	1.1	yards	yd
km	kilometers	0.6	miles	mi
AREA				
cm ²	square centimeters	0.16	square inches	in ²
dm ²	square decimeters	1.2	square yards	yd ²
m ²	square meters	0.4	square miles	mi ²
ha	hectares (10,000 m ²)	2.5	acres	ac
MASS (weight)				
g	grams	0.035	ounces	oz
kg	kilograms	2.2	pounds	lb
t	tonnes (1,000 kg)	1.1	short tons	
VOLUME				
ml	milliliters	0.03	fluid ounces	fl oz
l	liters	2.1	pints	p
l	liters	1.06	quarts	qt
l	liters	0.26	gallons	gal
m ³	cubic meters	36	cubic feet	ft ³
m ³	cubic meters	1.3	cubic yards	yd ³
TEMPERATURE (exact)				
°C	Celsius temperature	5/9 (then add 32)	Fahrenheit temperature	°F

TEMPERATURE (exact)

*C	Crysis temperature	S/R (shape add 32)	Fakehold temperature	*F
100	100	100	100	100
110	110	110	110	110
120	120	120	120	120
130	130	130	130	130
140	140	140	140	140
150	150	150	150	150
160	160	160	160	160
170	170	170	170	170
180	180	180	180	180
190	190	190	190	190
200	200	200	200	200
210	210	210	210	210
220	220	220	220	220
230	230	230	230	230
240	240	240	240	240
250	250	250	250	250
260	260	260	260	260
270	270	270	270	270
280	280	280	280	280
290	290	290	290	290
300	300	300	300	300
310	310	310	310	310
320	320	320	320	320
330	330	330	330	330
340	340	340	340	340
350	350	350	350	350
360	360	360	360	360
370	370	370	370	370
380	380	380	380	380
390	390	390	390	390
400	400	400	400	400
410	410	410	410	410
420	420	420	420	420
430	430	430	430	430
440	440	440	440	440
450	450	450	450	450
460	460	460	460	460
470	470	470	470	470
480	480	480	480	480
490	490	490	490	490
500	500	500	500	500
510	510	510	510	510
520	520	520	520	520
530	530	530	530	530
540	540	540	540	540
550	550	550	550	550
560	560	560	560	560
570	570	570	570	570
580	580	580	580	580
590	590	590	590	590
600	600	600	600	600
610	610	610	610	610
620	620	620	620	620
630	630	630	630	630
640	640	640	640	640
650	650	650	650	650
660	660	660	660	660
670	670	670	670	670
680	680	680	680	680
690	690	690	690	690
700	700	700	700	700
710	710	710	710	710
720	720	720	720	720
730	730	730	730	730
740	740	740	740	740
750	750	750	750	750
760	760	760	760	760
770	770	770	770	770
780	780	780	780	780
790	790	790	790	790
800	800	800	800	800
810	810	810	810	810
820	820	820	820	820
830	830	830	830	830
840	840	840	840	840
850	850	850	850	850
860	860	860	860	860
870	870	8		




TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1. INTRODUCTION	1
2. WR-187 TE ₀₁ OPERATION	2
3. PROCUREMENT PROCESS	2
4. INSTALLATION AND TEST WITH THE ASDE-3	3
5. CONCLUSIONS	4

LIST OF ILLUSTRATIONS

<u>Figure</u>	<u>Page</u>
1. ASDE-3 Radar Tower and Installation of FAA Technical Center	2
2. WR-62 to WR-187 Transitions with Higher Order Mode Suppressors	8
3. WR-187 Waveguide Multi-Mode Mode Suppression Using Resistance Cards	9
4. WR-187 Waveguide TE ₀₂ Mode Suppression Using Loaded Slots	9
5. ASDE-3 Radar Display With Low Loss Transmission Line Showing Absence of Ringing	10

LIST OF TABLES

<u>Table</u>	<u>Page</u>
1. Waveguide Modes in WR-187 With Cutoff Frequency Below 16.2 GHz	5
2. Low Power Level Ku-Band Measurements	5
3. Specification for WR-187 Low Loss Transmission Line For ASDE-3 Radar	6

SUCCESSFUL APPLICATION OF LOW LOSS, OVERMODED WR-187
WAVEGUIDE TO THE ASDE-3 RADAR

1. INTRODUCTION

Over-moded waveguides have long promised low transmission line losses so important to the radar system designer because of its two-way system loss, on transmit and receive. Trapped higher order mode resonances have heretofore prevented successful application of this potential.

On 15th April 1980, the first known U.S. application of overmoded rectangular waveguide, WR-187 operating cross polarized in the TE_{01} mode at 15 GHz, was successfully accomplished at the FAA Technical Center, Atlantic City Airport NJ.⁽¹⁾ The radar tower and installation are shown in Figure 1. The mode suppression was adequate to allow radar operation of this 35-nanosecond system at a dynamic range of 160 dB in less than 1 microsecond. Use of oversized circular waveguide, which was attempted earlier, was unsuccessful due to the inability to solve the associated higher order mode ringing problems. Calculated and measured loss in WR-187 was only 1.0 dB per 100 ft, compared to 5.0 dB in WR-62 for OFHC copper waveguide. The return loss of this oversized waveguide system was better than 40 dB (1.01VSWR), compared to 20 dB for a typical WR-62 run (1.2 VSWR).

(1) A practical 1981 review of the State of the Art of Low Loss Transmission Using Over-Moded Waveguide by Tore N. Anderson. was presented at the IEEE AP/MTT-S Philadelphia Section Benjamin Franklin 1981 Symposium by Tore N. Anderson.

2. WR 187 TE_{01} OPERATION ²

Mode suppressors and Gaussian transitions from WR-62 (TE_{10}) to WR-187 (TE_{01}) were designed and electroformed by the A. J. Tuck Co., Brookfield CT 06804, to meet the required application. The hardware is shown in Figure 2. Using the transitions and WR-187 waveguide, the modes listed in Table I could be generated and propagated. Consequently, mode suppressors were fabricated to suppress the undesired modes. Figure 3 indicates the technique used to suppress all but one of the undesired modes. Five metallized mica resistance cards were mounted in grooves electroformed in place. These suppress all the TE_{10} , TE_{20} , and TE_{30} modes, as well as the TE_{mn}/TM_{mn} ($m \neq n, 0$), very effectively with very low loss to the desired TE_{01} mode, i.e., less than 0.04 dB. The TE_{02} mode, however, is not affected by these cards and it was necessary to couple out this modal energy by the slot coupler shown in Figure 4.

Low-level measurements tabulated in Table II indicate that these techniques are useable over the full WR-62 waveguide band. Return loss for this transmission line is 30 dB at 12.4 GHz (1.06 VSWR), 35 dB at 14 GHz (1.04), and better than 40 dB from 15 to 18 GHz (1.02).

3. PROCUREMENT PROCESS

The first attempt to employ oversized waveguide utilized WC109 circular waveguide. The moding problems which occurred produced multiple radar returns far beyond the

²REFERENCE: U.S. Patent 3,218,526, K. I. Khoury (DECCA), 16 Nov. 1965.

minimum range of the ASDE-3. Concentrated efforts were made to find a practical solution for field use in an operational radar. No viable solution for use with circular or elliptical waveguides was developed.

Effort was then concentrated on application of oversized rectangular waveguide to provide low-loss transmission line between the transmitter/receiver and the antenna. The approach described in this report was implemented after discussions between DOT/TSC and DECCA, Limited, London, England, who hold the referenced patent. A specification, shown in Table III and suitable for ASDE-3 operation, was developed by DOT/TSC. A contract was awarded to the A. J. Tuck Company to design and fabricate transitions and mode absorbers, and provide suitable WR-187 waveguide lengths for the radar tower installation. The hardware was tested at low power levels at the factory and then moved to the FAA Technical Center for on-site testing with the ASDE-3 transmitter/receiver.

4. INSTALLATION AND TEST WITH THE ASDE-3

The transitions, mode absorbers, and WR-187 waveguide were set up and tested at the Atlantic City Airport site of the ASDE-3. The tests were performed in two segments.

In the first segment, the waveguide run was laid out horizontally and terminated by a high power WR-62 termination. The waveguide was fed by the ASDE-3 transmitter/receiver subsystem. The line under test consisted of 75 ft of WR-187 waveguide, two WR-62-to-WR-187 gaussian taper transitions, and various combinations of the mode absorbers which are shown in Figure 2. The best results were achieved using four mode absorbers, two with resistance cards and two without resistance cards. The resonance free effect produced on the radar display is shown

in Figure 5. The waveguide was bent in both the E and H planes with no noticeable change in performance. The insertion loss of the entire waveguide run including transitions and mode absorbers was 0.96 dB at 16 GHz. Allotting 0.2 dB for the transitions and mode absorbers, the WR-187 OFHC copper waveguide attenuation is essentially 1 dB per 100 ft. The insertion loss of WR-62 OFHC copper waveguide is 5 dB per 100 ft. The net one-way reduction in insertion loss for the 80-ft waveguide run would be approximately 3 dB. This was verified after installation to the tower.

The second segment was accomplished when the waveguide was interconnected between the transmitter/receiver at ground level and the antenna rotating at 120 ft above ground level. Similar resonance-free performance was achieved in actual field operation of the ASDE-3 for the operational range requirement of 500 ft to 3 nautical miles. The insertion loss from the transmitter/receiver through the rotary joint to the antenna was measured at 3.3 dB which verified the anticipated reduction in transmission loss.

5. CONCLUSIONS

Low-loss interconnection between the transmitter/receiver and antenna can be achieved using oversize rectangular waveguide in the TE_{01} mode. Use of oversize rectangular waveguide rather than oversize circular or elliptical waveguide is recommended to provide effective control of higher order modes which would otherwise obscure radar returns in the ASDE-3 radar.

TABLE 1. Waveguide Modes in WR-187 with Cutoff Frequency Below 16.2 GHz

Mode	Cutoff Freq. GHz
TE ₁₀	3.152
TE ₂₀	6.305
TE ₀₁ *	6.768
TE ₁₁ /TM ₁₁	7.466
TE ₂₁ /TM ₂₁	9.250
TE ₃₀	9.457
TE ₃₁ /TM ₃₁	11.629
TE ₀₂	13.535
TE ₁₂ /TM ₁₂	13.898
TE ₂₂ /TM ₂₂	14.932

* Desired Mode

Table 2. Low Power Level K_u-Band Measurements

Freq. GHz.	Total Loss dB	Transition and Mode Absorber	Total	Waveguide Loss dB/Ft.	Theoretical Waveguide loss, dB/ft.
12.4	.42	.28 dB	.14	.012	.012
16.0	.36	.24 dB	.12	.010	.0098
18.0	.31	.20 dB	.11	.009	.0092

TABLE 3. Specification For WR-187 Low Loss Transmission Line
For ASDE-3 Radar

1. SCOPE

- 1.1 Scope - The equipment specified herein is a low loss waveguide transmission line system for use with the ASDE-3 Radar. It connects the transmitter output to the antenna and provides a low loss transmission path for the 15.7 GHz microwave signal between these two points. It utilizes over-sized cross-moded rectangular waveguide, and consists of transitions mode suppressors and straight sections of WR-187 rectangular waveguide.

2. APPLICABLE DOCUMENTS

- 2.1 General - The following specifications, standards and other documentation form part of this specification and are applicable where pertinent.

2.1.1. Military Specifications

MIL HDBK-216 RF Transmission Lines and Fittings
MIL-F-3922/52B Flanges, Waveguide

3. REQUIREMENTS

3.1 Summary of Components to be Furnished by the Contractor

The contractor shall furnish the quantity of low loss waveguide transmission line components specified in the contract. Each system shall be complete in accordance with all relevant specifications and shall include the major items tabulated below.

- a. Transitions
- b. Mode Suppressors
- c. Rectangular Waveguide sections with gaskets and hardware

- 3.1.1 Transition - The transition shall be of high conductivity copper and shall provide a transition for the TE_{10} mode in WR-62 rectangular waveguide to the TE_{01} in WR-187 rectangular waveguide.

The WR-62 end of the transition shall have a UG-419/U cover flange.

The WR-187 end of the transition shall have a CPR-187G flange. The CPR-187G flange shall have an alignment pin and hole to assure proper alignment of the transition with the mating waveguide.

In the frequency range 15.7 GHz, the transition shall meet the following electrical requirements:

- a. VSWR 1.1:1 or less
- b. Insertion Loss: .1 dB
- c. Spurious Modes: 35 dB or more below the level of the desired mode

- 3.1.2 Mode Suppressor - The mode suppressor shall be of high conductivity copper and shall attenuate all spurious TE and TM modes in WR-187 size waveguide. It shall have a CPR-187G flange on each end. Each flange shall have an alignment pin and hole to assure proper alignment of the suppressor with the mating waveguide.

In the frequency range 15.7 GHz to 16.2 GHz, the mode suppressor shall meet the following electrical requirements:

- a. VSWR 1.2:1 or less
- b. Insertion Loss: .2 dB
- c. Spurious Modes: The effectiveness of the mode suppressor in attenuating spurious modes shall be determined by observing its performance in a low loss transmission line run. In a 70 foot run of WR-187 waveguide with a transition and mode suppressor at each end, ringing due to spurious modes shall be 150 dB or more below the level of the desired TE_{01} mode within 1 μ sec of the trailing edge of a 40 n sec transmitted pulse.

- 3.1.3 Rectangular Waveguide - The transmission line shall be WR-187 OFHC copper rectangular waveguide. Each length shall have CPR-187G flanges at each end. These flanges will have an alignment pin and a hole to assure proper alignment of the waveguide sections.



Figure 1. ASDE-3 Radar Tower and Installation at FAA Technical Center

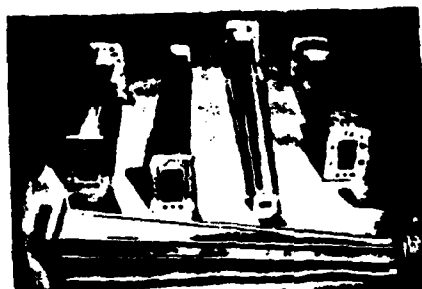


Figure 2. WR-62 to WR-187 Transitions With Higher Order Mode Suppressors

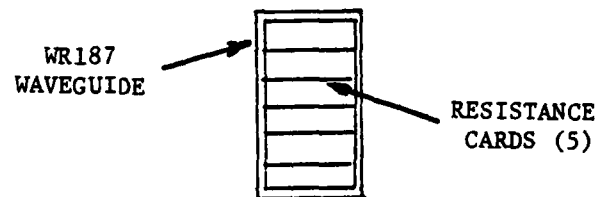


Figure 3. WR-187 Waveguide Multi-Mode
Mode Suppression Using Resistance Cards

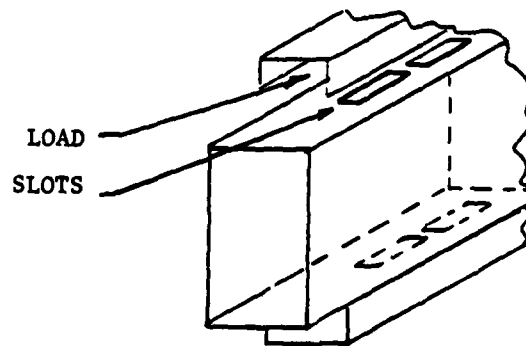


Figure 4. WR-187 Waveguide TE_{02}
Mode Suppression Using Loaded Slots

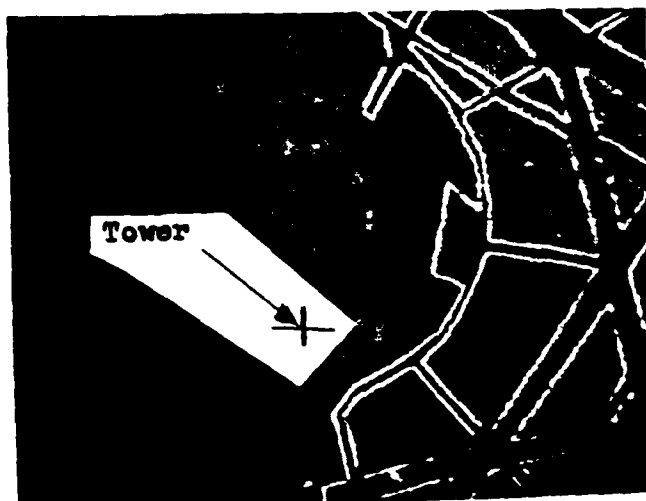


Figure 5. ASDE-3 Radar Display With Low Loss Transmission Line Showing Absence of Ringing

105 Copies

FILMED
7-8