Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

Do Not Return This Document To DTIC

Reproduced by

AIR DOCUMENTS DIVISION

TECHNICAL INTELLIGENCE

T-2

AMC

HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

The U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY ENSUE FROM THE CONTRACTORS INFRINGING ON THE FOREIGN PATENT RIGHTS WHICH MAY BE INVOLVED.

REEL – C

332

A.T.I.

8344

D52.338/753

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ATI No. 8344

WARTIME REPORT

ORIGINALLY ISSUED
January 1941 as
Advance Confidential Report

CHARACTERISTICS OF NACA 4400R SERIES RECTANGULAR AND TAPERED AIRFOILS, INCLUDING THE EFFECT OF SPLIT FLAPS

By Harry Greenberg

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

FILE COPY
RETURN TO
Special Documents Branch – TSRWF-6
Wright Field Reference Library Section
Air Documents Division – Intelligence (T-2)
Wright Field, Dayton, Ohio.

Air Documents Division, T-2
AMC, Wright Field
Microfilm No.
R C 332 F 8344

RECEIVED
AUG 8 1947

NACA

WASHINGTON

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

L - 493

L-493

CHARACTERISTICS OF NACA 4400R SERIES RECTANGULAR AND TAPERED AIRFOILS, INCLUDING THE EFFECT OF SPLIT FLAPS

By Harry Greenberg

INTRODUCTION

At the request of the Bureau of Aeronautics, Navy Department, tests were made in the variable-density wind tunnel of a tapered wing of 3-10-18 plan form and based on the NACA 4400R series sections (reference 1). The wing was also tested with 0.2 chord split flaps, deflected 60°, in the center of the wing and having flap span to wing span ratios of 0.3, 0.5, 0.7, and 1.0, respectively. In order to get data from which to calculate the characteristics of the flapped wing, the investigation of reference 1 was extended to include tests of the four rectangular airfoils of the NACA 4400R series (4409R, 4412R, 4415R, and 4418R) with full-span 0.2 chord, trailing-edge split flaps deflected 60°.

MODELS AND TESTS

The numbers in the designation of the tapered wing (3-10-18) refer to taper ratio, aspect ratio, and root section percent thickness, respectively. The construction tip section was 9 percent thick. The wing was constructed using straight-line elements between corresponding points on the root (NACA 4418R) and tip (NACA 4409R) sections, and so that in front elevation the upper element was a straight line from tip to tip (fig. 1). All the models had a wing area of 150 square inches, were made of aluminum alloy, and had no geometric twist.

Measurements of lift, drag, and pitching moment were made in the variable-density wind tunnel according to standard procedure (reference 2) at a test Reynolds number of approximately 3,000,000, which corresponds to an effective Reynolds number Re of approximately 8,000,000 (reference 3).

RESULTS

Standard plots showing the characteristics of the rectangular airfoils with 0.2 chord split flaps deflected 60° are shown in figures 2 to 5. The section characteristics after the stall are not shown. The principal characteristics are summarized in table I.

The characteristics of the tapered wing with the different flap arrangements are shown in figures 6 to 10. In figure 6, a calculated curve of C_{D_e}, determined by the method of reference 4, is given for comparison with the test results.

Values of angle of zero lift also were calculated by the method of reference 5 and show good agreement with measured values as shown in table II. The lift-curve slope was calculated (reference 4) for the plain wing but not for the wings with flaps because the slopes of the sections with flaps are far from constant. The moment about the aerodynamic center of the plain wing was calculated by the simpler method of reference 5 which assumes $c_{m_{a.c.}}$ is constant along the span. The moments for the wings with flaps deflected were obtained by the method of reference 5 using average values of the section moment coefficient for c_{m_0} and average values of Δc_m at a lift coefficient of 1.0 for the flapped portion of the span.

In the calculation of maximum lift by the method of reference 4, the span load distribution was obtained by the method of reference 6. Good agreement with experiment is shown for the plain wing but poor agreement for the wing with full-span flap. In fact, the measured maximum lift of the tapered flapped wing is higher than that of any of the flapped sections along the span. The discrepancy is attributed to the inadequacy of the assumptions involved in the calculation of maximum lift. These calculations were not made for the wings with partial-span flaps in view of the above and in view of the added uncertainty of the value of the section maximum lift developed near the flap end. In any case, the measured values of maximum lift coefficient of these tapered wings may not be attainable in flight due to the lateral instability associated with tip stalling before the angle corresponding to maximum lift can be reached (reference 7).

Langley Memorial Aeronautical Laboratory,
National Advisory Committee for Aeronautics,
Langley Field, Va.

L-493

REFERENCES

1. Sherman, Albert: Preliminary Report on the Characteristics of the N.A.C.A. 44COR Series Airfoils. NACA ACR, March 1939.

2. Jacobs, Eastman N., and Abbott, Ira H.: The N.A.C.A. Variable-Density Wind Tunnel. Rep. No. 416, NACA, 1932.

3. Jacobs, Eastman N., and Sherman, Albert: Airfoil Section Characteristics as Affected by Variations of the Reynolds Number. Rep. No. 586, NACA, 1937.

4. Anderson, Raymond F.: The Experimental and Calculated Characteristics of 22 Tapered Wings. Rep. No. 627, NACA, 1938.

5. Pearson, Henry A., and Anderson, Raymond F.: Calculation of Aerodynamic Characteristics of Tapered Wings with Partial-Span Flaps. Rep. No. 685, NACA, 1939.

6. Pearson, H. A.: Span Load Distribution for Tapered Wings with Partial-Span Flaps. Rep. No. 585, NACA, 1937.

7. Jacobs, Eastman N.: Tapered Wings, Tip Stalling, and Preliminary Results from Tests of the Stall-Control Flap. NACA ACR, Nov. 1937.

L-493

TABLE I

Characteristics of NACA 44OOR Series Airfoils with

0.2c Split Flap Deflected 60°

Thickness (percent c)	$c_{l_{max}}$	α_{l_0}	$c_{m_{(a.c.)_0}}$ at $C_L = 1$	$(a.c.)_0$ (percent c from c/4)		c_{l_0} (approx.) (1)	a_0 (approx.) (1)
				x	y		
9	2.10	-14.5	-0.231	0.3	5	-16.2	0.085
12	2.38	-15.3	-.248	.1	3	-16.3	.089
15	2.41	-15.4	-.270	.6	4	-16.8	.092
18	2.41	-16.4	-.272	.9	3	-17.4	.095

[1] These values apply to a linear lift curve approximating the experimental lift curve.

TABLE II

Characteristics of NACA 3-10-18 (NACA 4400R) Tapered Wing with 0.2c Split Flap Deflected 60°

Flap length (fraction span)	$\alpha_{L=0}$		a		$\frac{x_{a.c.}}{3/b}$		$C_m(a.c.)_0$ at $C_L = 1$		$C_{D_{min}}$		$C_{L_{max}}$	
	(exp.)	(calc.)	(exp.)	(calc.)	(exp.)	(calc.)	(exp.)	(calc.)	(exp.)	(calc.)	(exp.)	(calc.)
0	-2.4	-2.4	0.083	0.081	0.018	0.008	-0.039	-0.033	0.0077	0.0078	1.39	1.43
.3	-7.9	-7.6	.084	-	-	-	-.175	-.173	.076	-	1.89	-
.5	-11.1	-10.5	.086	-	-	-	-.240	-.226	.107	-	2.16	-
.7	-13.7	-13.0	.086	-	-	-	-.280	-.265	.135	-	2.38	-
1.0	-15.3	-15.5	[1].085	-	-	-	-.292	-.282	.144	-	2.61	2.25

[1]These values apply to a linear lift curve approximating the experimental lift curve.

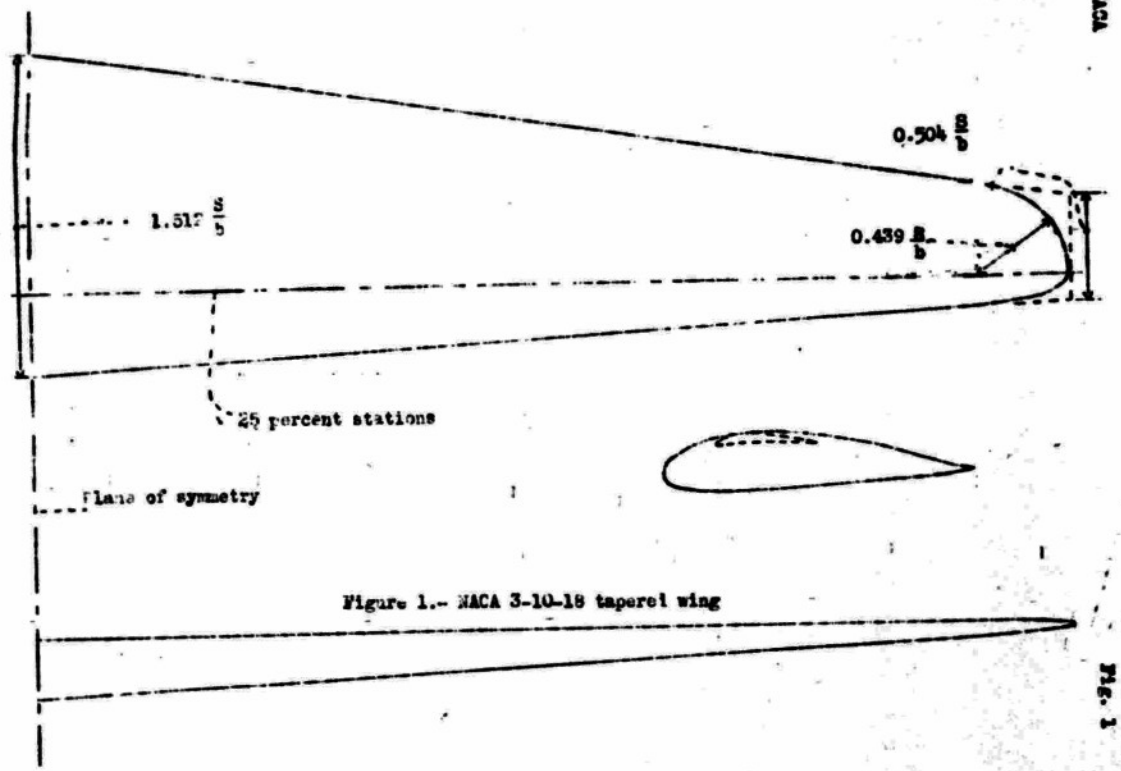

Figure 1.- NACA 3-10-18 tapered wing

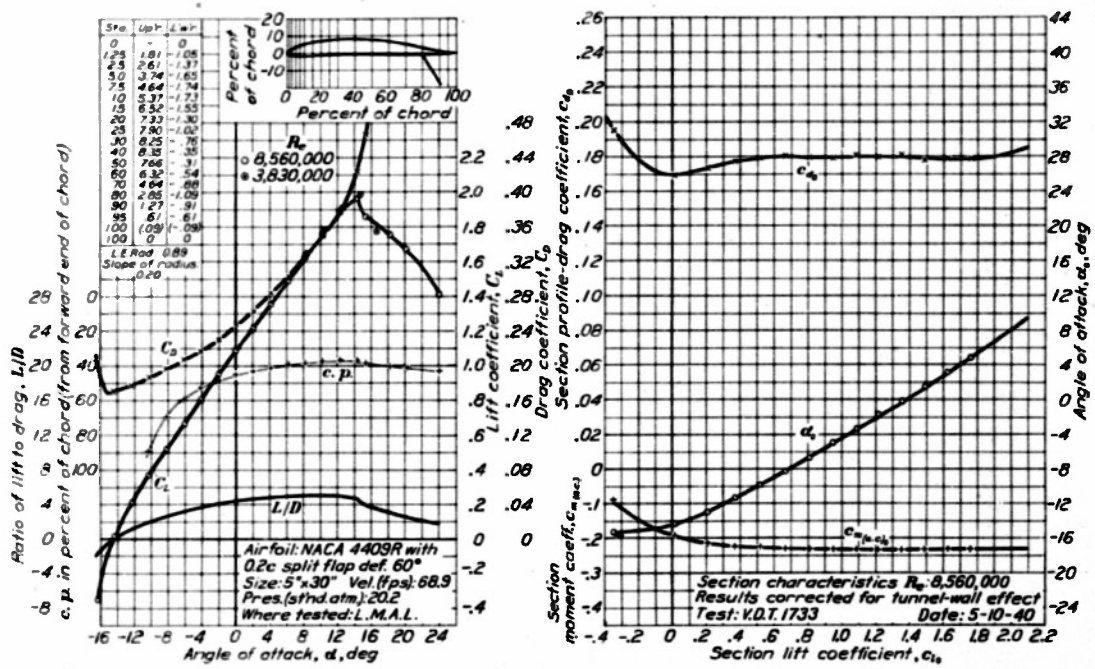

Figure 2.- NACA 4409R with 0.2c split flap deflected 60°.

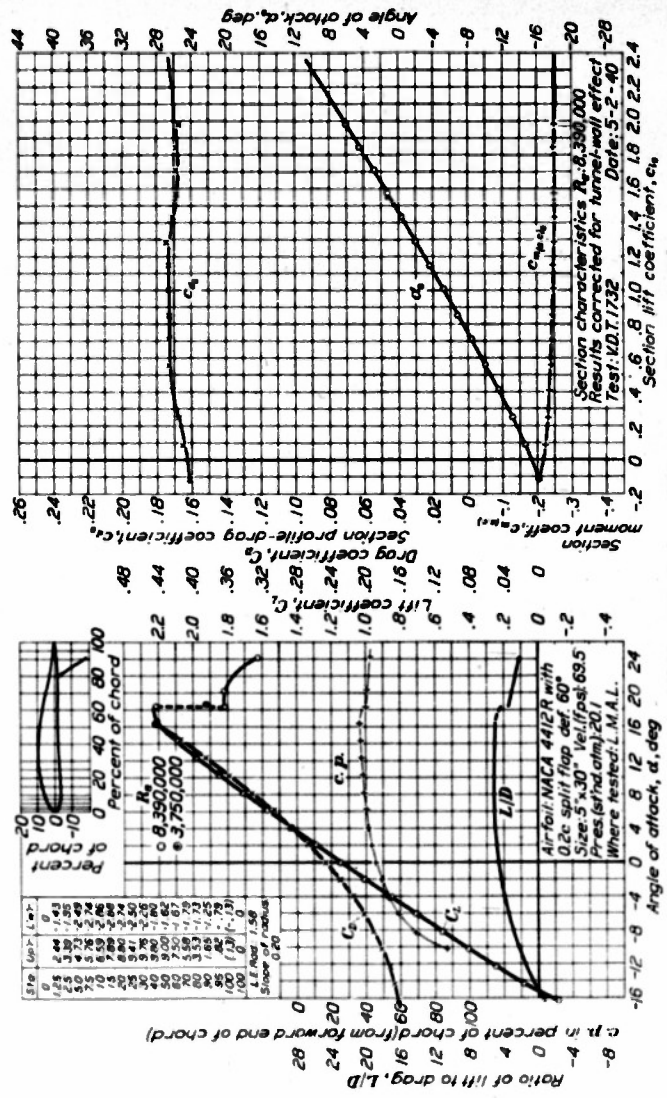

Figure 3.- NACA 4412R with 0.2c split flap deflected 60°.

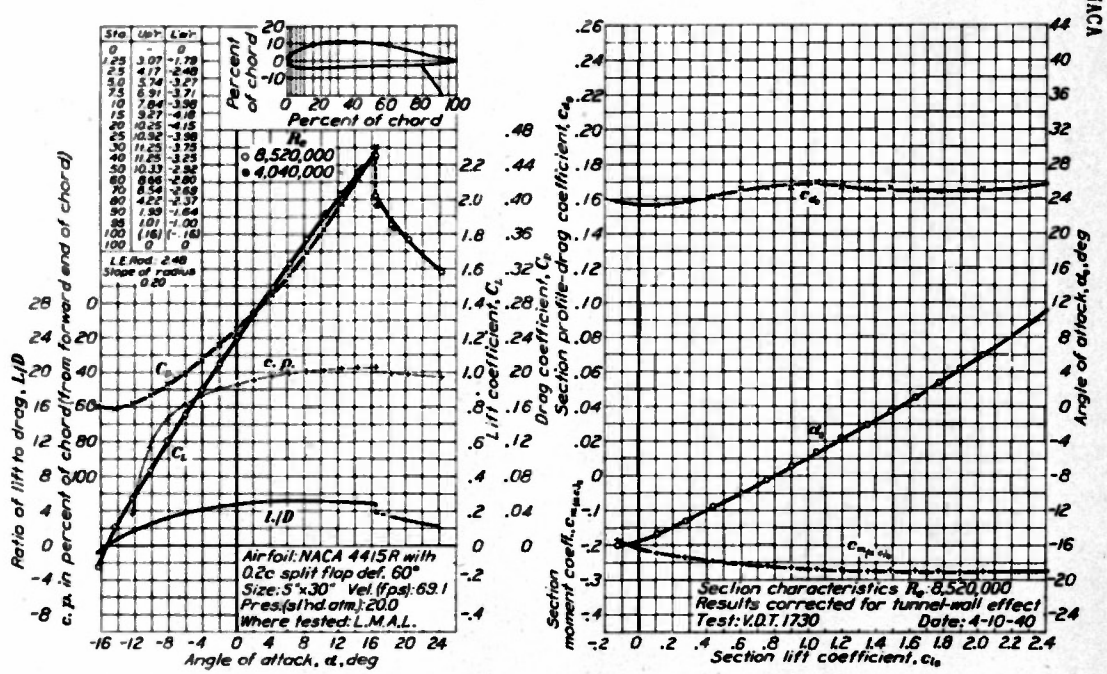

Figure 4.- NACA 4415R with 0.2c split flap deflected 60°.

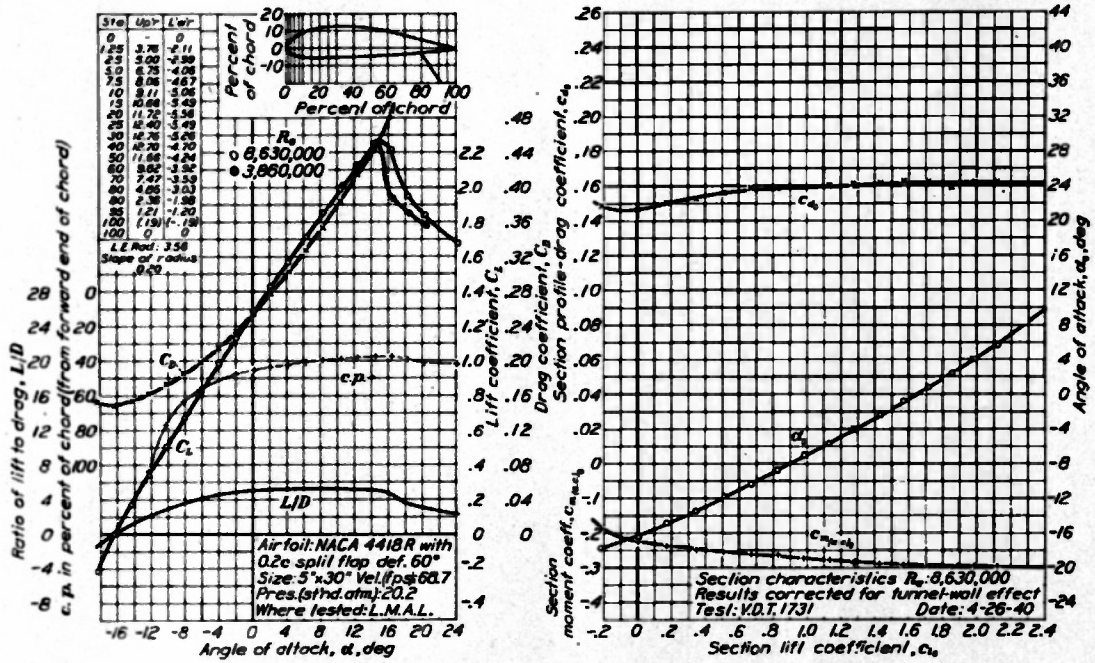

Figure 5.- NACA 4418R with 0.2c split flap deflected 60°.

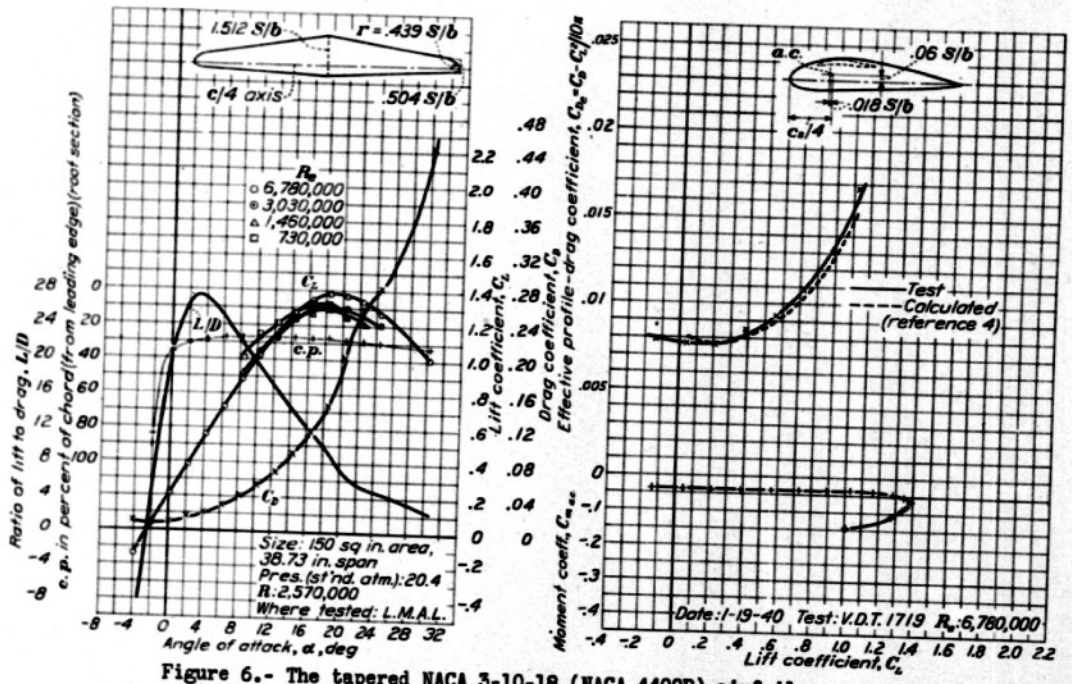

Figure 6.- The tapered NACA 3-10-18 (NACA 4400R) airfoil.

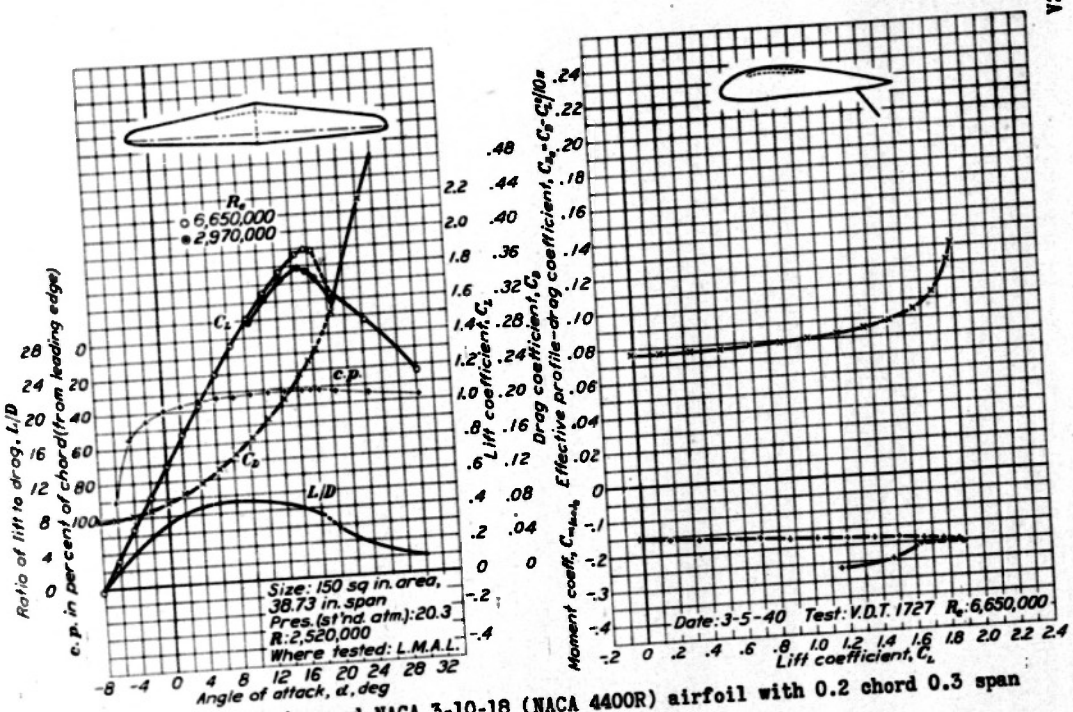

Figure 7.- The tapered NACA 3-10-18 (NACA 4400R) airfoil with 0.2 chord 0.3 span split flap deflected 60°.

Fig. 7

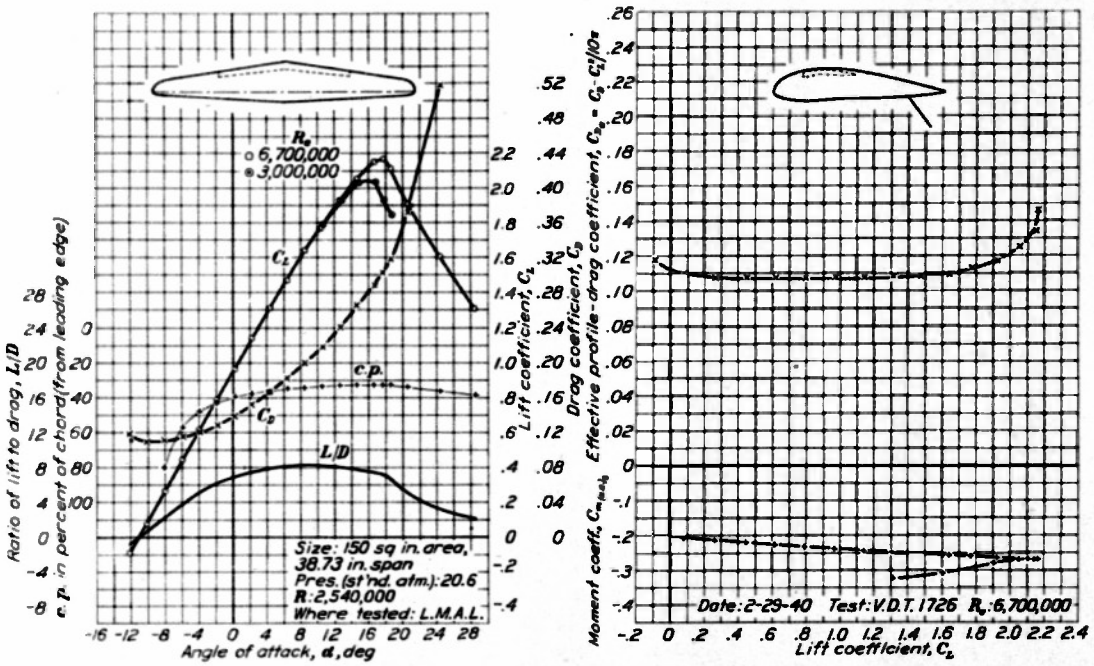

Figure 8.- The tapered NACA 3-10-18 (NACA 4400R) airfoil with 0.2 chord 0.5 span split flap deflected 60°.

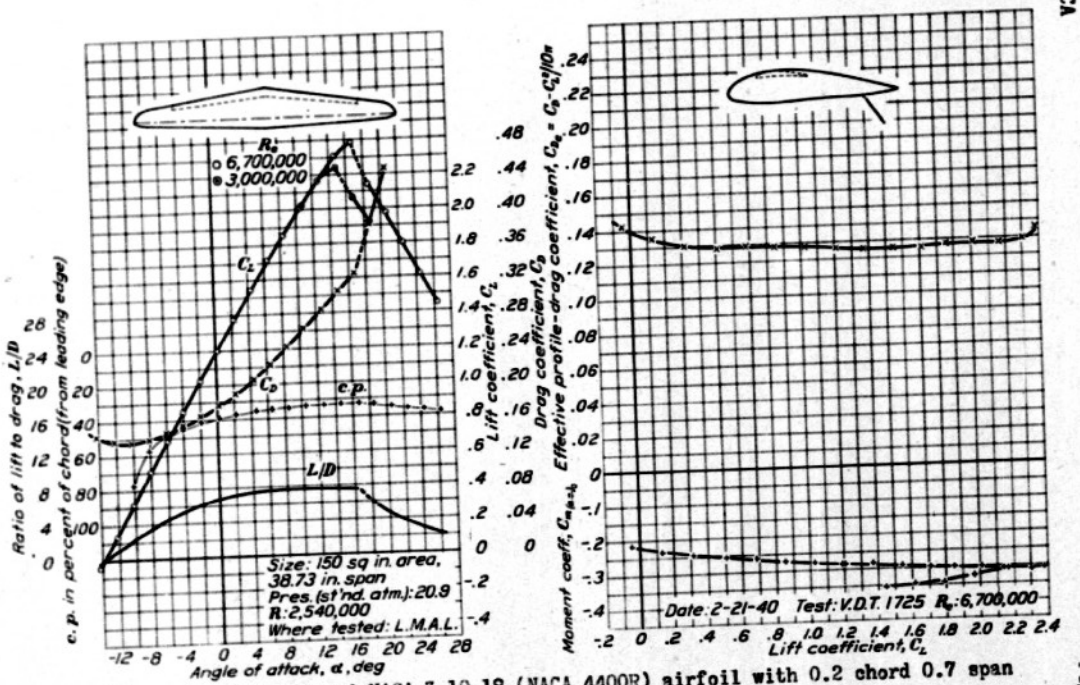

Figure 9.- The tapered NACA 3-10-18 (NACA 4400R) airfoil with 0.2 chord 0.7 span split flap deflected 60°.

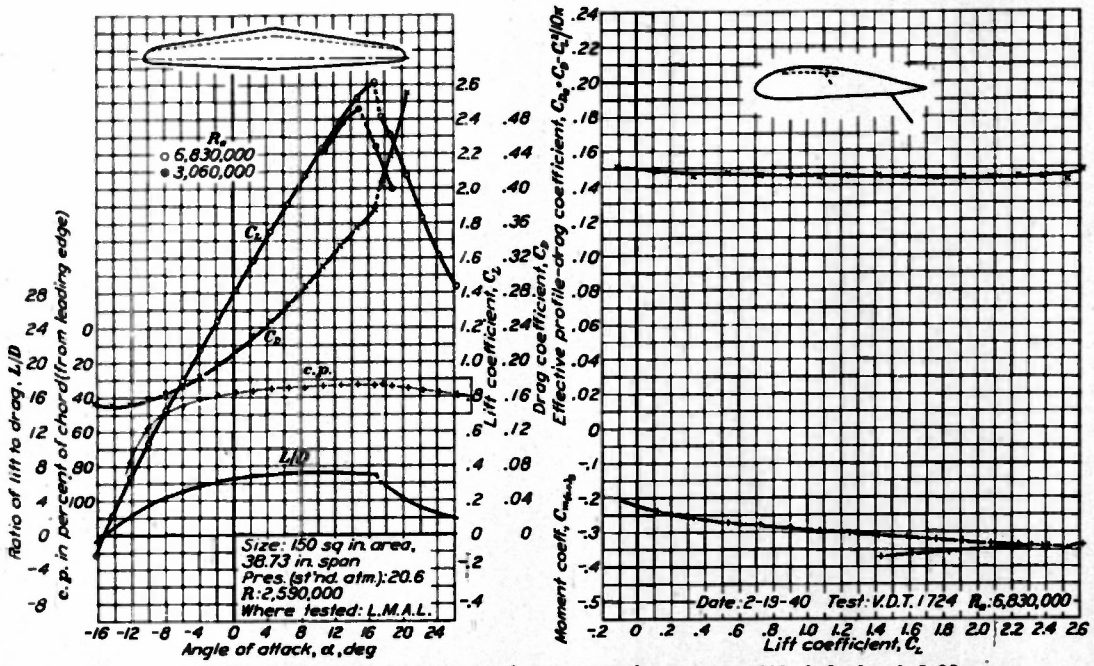

Figure 10.- The tapered NACA 3-10-18 (NACA 4400R) airfoil with 0.2 chord full-span split flap deflected 60°.

REEL – C

332

A.T.I.

8344

TITLE: Characteristics of NACA 4400R Series Rectangular and Tapered Airfoils, Including The Effect of Split Flaps

AUTHOR(S): Greenberg, H.

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D.C.

ATI- 8344

REVISION none

ORIG. AGENCY NO. ACR-L-493

DATE	DOC. CLASS	COUNTRY	LANGUAGE	PAGES	ILLUSTRATIONS
Jan '41	Unclass.	U. S.	Eng.	15	tables, graphs, drwgs

ABSTRACT:

P. 1/1

Tests were made in variable-density wind tunnel with the tapered wing tested with 0.2 chord split flaps deflected 60° in center of wing with flap span to wing span ratios of 0.3, 0.5, 0.7, and 1.0, respectively. Rectangular airfoils were tested with full-span 0.2 chord trailing-edge split flaps deflecting 60°. Standard plots are presented which show characteristics of airfoils tested. Principal characteristics are summarized in table form. Corresponding calculated results are given for some characteristics.

DISTRIBUTION: Request copies of this report only fr

DIVISION: Aerodynamics (2)

SECTION: Wings and Airfoils (6)

ATI SHEET NO.: R-2-6-55

SU ps,

W

AD-B803 904

Air Materiel Command
U. S. Air Force

AIR TECHNICAL INDEX

Dayton, Ohio

TITLE: Characteristics of NACA 4400R Series Rectangular and Tapered Airfoils, Including The Effect of Split Flaps

AUTHOR(S): Greenberg, H.

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D.C.

ATI- 8344

REVISION none

ORIG. AGENCY NO. ACR-L-493

DATE	DOC. CLASS	COUNTRY	LANGUAGE	PAGES	ILLUSTRATIONS
Jan '41	Unclass.	U. S.	Eng.	15	tables, graphs, drwgs

ABSTRACT:

Tests were made in variable-density wind tunnel with the tapered wing tested with 0.2 chord split flaps deflected 60° in center of wing with flap span to wing span ratios of 0.3, 0.5, 0.7, and 1.0, respectively. Rectangular airfoils were tested with full-span 0.2 chord trailing-edge split flaps deflecting 60°. Standard plots are presented which show characteristics of airfoils tested. Principal characteristics are summarized in table form. Corresponding calculated results are given for some characteristics.

DISTRIBUTION: Request copies of this report only from Originating Agency

DIVISION: Aerodynamics (2)
SECTION: Wings and Airfoils (6)
ATI SHEET NO.: R-2-6-55

SUBJECT HEADINGS: Wings - Aerodynamics (99150); Flaps, Wing - Lift and drag characteristics (37550)