

UNCLASSIFIED

AD NUMBER
AD241216
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; APR 1960. Other requests shall be referred to Air Force Cambridge Research Center, Cambridge, MA.
AUTHORITY
AFCRL ltr, 3 Nov 1971

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD 241 216

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD No. 241 216

ASTIA FILE COPY

AFRC-TN-60-366



NEW YORK UNIVERSITY
Institute of Mathematical Sciences
Division of Electromagnetic Research

10

RESEARCH REPORT No. EM-152

FILE COPY
Return to
ASTIA
INGTON HALL STATION
LINGTON 12, VIRGINIA
ATTN: TISSS

Topics in the Theory of Discrete Information Channels

RICHARD A. SILVERMAN and SZE-HOU CHANG

Contract No. AF 19(604)5238

APRIL, 1960

ASTIA
AUG 19 1960
TIPOR

NEW YORK UNIVERSITY

Institute of Mathematical Sciences
Division of Electromagnetic Research

Research Report No. EM-152

TOPICS IN THE THEORY
OF DISCRETE INFORMATION CHANNELS

Richard A. Silverman and Sze-Hou Chang

Richard A. Silverman

Richard A. Silverman

Sze-Hou Chang

Sze-Hou Chang

Morris Kline

Morris Kline
Director

Werner W. Gerbes

Dr. Werner Gerbes
Contract Monitor

The research reported in this document has been sponsored by the Electronics Research Directorate of the Air Force Cambridge Research Center, Air Research and Development Command, under Contracts Nos. AF 19(604)5238 and AF 19(604)3053.

Requests for additional copies by Agencies of the Department of Defense,
their contractors, and other Government agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENTS SERVICE CENTER
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA

Department of Defense contractors must be established for ASTIA services
or have their 'need-to-know' certified by the cognizant military agency
of their project or contract.

All other persons and organizations should apply to the:

U.S. DEPARTMENT OF COMMERCE
OFFICE OF TECHNICAL SERVICES
WASHINGTON 25, D.C.

Abstract

The present article represents the authors' contribution to the URSI Information Theory monograph edited by J. Loeb, Vice Chairman of Commission 6. It discusses various topics in the theory of discrete information channels, including the general binary channel, channels with fading, cascaded channels, and channels with memory.

Table of Contents

	<u>Page</u>
1. Introduction	1
2. Information sources and information rate	1
3. Channels and mutual information rate	3
4. Channel capacity	9
5. The general binary channel	17
6. Channels with fading	22
7. Cascaded channels	31
8. Channels with memory	35
References	42

1. Introduction

Many interesting aspects of information theory can be illustrated by studying discrete channels with small input and output alphabets. In fact, much important work has been done on the simplest of all channels, the (memoryless) binary symmetric channel (BSC). We refer to Elias' study of the way in which rate and probability of error in the BSC depend on the length of the blocks in which the coding is done [1]. In the present article, we shall be concerned exclusively with asymptotic properties of channels, i.e. properties which are based on the assumption that coding is done in arbitrarily long blocks. In this study, we shall sometimes consider ternary and higher order channels as well as binary channels. In fact, the binary channel is too simple to be representative of the general discrete channel, as can be seen from the fact that neither input letter can be suppressed without destroying its information rate*.

2. Information sources and information rate

The first concept of interest in information theory is that of an information source, i.e. a device which generates a random sequence of letters from some alphabet; the random sequence then serves as the input to a channel (see Section 3). Let the input alphabet consist of the m letters $x_1, \dots, x_m$. We shall confine our attention to independent sources, for which the probability P_i , $1 \leq i \leq m$, that the input letter x_i is emitted at time t is statistically independent of which letters were emitted at times prior to t and of which

*Even in the most asymmetric binary channel one does not have to use an input symbol more often than 63 per cent (or less often than 37 per cent) of the time to achieve capacity (see Section 5).

letters will be emitted at times subsequent to t . Thus, the probability of a sequence in which x_i appears N_i times, $1 \leq i \leq m$, is just

$$(P_1)^{N_1} (P_2)^{N_2} \dots (P_m)^{N_m} .$$

According to Shannon [2], it is particularly meaningful and fruitful in studying information sources to introduce the concept of the entropy or information associated with a source; for a source S of the type under consideration, this quantity is defined by

$$(1) \quad H(S) = - \sum_{i=1}^m P_i \log P_i .$$

The base to which the logarithm is taken is conventionally chosen to be 2, in which case (1) is said to give the number of bits of information per source letter (see remarks at the end of this section); whenever we write $\log$ we shall mean $\log_2$. Henceforth, it will be assumed that the source emits one letter per second (and that the channel accepts one letter per second). With this convention, (1) gives either the entropy of the source in bits/symbol or the information rate of the source in bits/second. This convention allows us to use the terms entropy (or information) and rate interchangeably; the adjustment needed in case the source emits one letter every T seconds is obvious.

We shall not linger on the derivation of (1) from a set of properties which it seems reasonable to expect information to have. Such derivations are given in detail by Shannon [2], Khinchin [3] and Faddeyev [4]. An important property of $H(S)$ is that it vanishes if the source can emit only one of the

letters $x_1, \dots, x_m$, and takes its maximum value ($\log m$) when the source emits all of the letters $x_1, \dots, x_m$ with equal probability. (This is in accord with intuitive ideas of information.) Another important property of $H(S)$ is the fact that although S can emit m^N possible sequences of length N , one of a much smaller set of $2^{NH(S)}$ sequences is very likely to occur if N is very large. (An exceptional case occurs if all m source letters are equally likely; then $H(S) = \log m$ and $2^{NH(S)} = m^N$.) This so-called asymptotic equipartition property is fundamental in information theory and can be demonstrated for much more general sources than those studied here (in fact for any stationary ergodic source; see McMillan [5], Khinchin [3]). Finally, we remark that the first of Shannon's two coding theorems (the so-called noiseless coding theorem) consists in showing that precisely $H(S)$ binary digits (bits) per symbol are needed to noiselessly encode the output of S into binary digits; in general it takes code blocks of infinite length to effect this encoding. The noiseless coding theorem gives theoretical justification for measuring $H(S)$ in bits/symbol (or bits/second).

3. Channels and mutual information rate

A discrete $m \times n$ memoryless (information) channel is a probabilistic device which accepts any of m possible input (or "transmitted") letters $x_1, \dots, x_m$ and emits any of n possible output (or "received") letters $y_1, \dots, y_n$, in accordance with the following rules:

- 1) For every input letter x_i and output letter y_j there is a definite number p_{ij} , $0 \leq p_{ij} \leq 1$, which represents the probability that if x_i is transmitted, y_j is received.

2) Every input letter gives rise to at least one output letter,
i.e.

$$\sum_{j=1}^n p_{ij} = 1.$$

3) The response of the device to any input letter x_i is statistically independent of its response to any past or future letter. In Section 8 we shall abolish this requirement and consider a special kind of discrete channel with memory.

A convenient representation of such a discrete channel is as an $m \times n$ channel matrix C , i.e. as the $m \times n$ rectangular array of numbers

$$(2) \quad C = \begin{vmatrix} p_{11} & p_{12} & \cdots & p_{1n} \\ p_{21} & p_{22} & \cdots & p_{2n} \\ \cdots & \cdots & \cdots & \cdots \\ p_{m1} & p_{m2} & \cdots & p_{mn} \end{vmatrix}$$

(We shall use C to denote either a channel or the associated matrix.) By

1) and 2) each p_{ij} lies between 0 and 1, and the sum of every row of the matrix (2) is unity; these properties are summarized by calling C a stochastic matrix.

The study of stochastic matrices has received a great deal of attention in the mathematical literature, especially in connection with the theory of Markov chains (see Feller [6]). We note that the case of a noiseless channel corresponds to the case where each row contains one 1 and $(m - 1)$ 0's, while each column contains one 1 and $(n - 1)$ 0's.

Suppose now that the input letter x_i , $1 \leq i \leq m$, is used with probability

P_i and define $p(i,j)$, the joint probability that x_i is emitted and y_j is received, by the relation

$$p(i,j) = P_i p_{ij} \quad .$$

Then the probability that y_j , $1 \leq j \leq n$, is received, regardless of which x_i is transmitted, is given by

$$P'_j = \sum_{i=1}^m p(i,j) \quad .$$

It is convenient to represent both the numbers P_i , $1 \leq i \leq m$, and the numbers P'_j , $1 \leq j \leq n$, as the components of corresponding column vectors $\vec{P}$ and $\vec{P}'$, i.e.

$$\vec{P} = \begin{pmatrix} P_1 \\ P_2 \\ \vdots \\ P_m \end{pmatrix} \quad \vec{P}' = \begin{pmatrix} P'_1 \\ P'_2 \\ \vdots \\ P'_n \end{pmatrix}$$

We now give a fundamental definition introduced by Shannon [2]: The average mutual information rate (or simply the rate) of the channel C when it is driven by a random sequence of input letters chosen independently* with probabilities given by the vector $\vec{P}$ (equivalently, when it is driven by

*It can be shown that for a memoryless channel any dependence between input letters diminishes the rate of the channel (see Feinstein [7]).

an independent source characterized by $\vec{P}$ is

$$(3) \quad R(\vec{P}) = \sum_{i=1}^m \sum_{j=1}^n p(i,j) \log \frac{p(i,j)}{P_i P_j}$$

bits/second. (Recall that by our convention one input letter per second is emitted by the source and accepted by the channel.)

To justify (3), we specialize to the case where the input and output alphabets are the same (so that in particular $m = n$) and use Shannon's correction channel argument [2], which asserts that

$$(4) \quad \text{correction rate}^* + \text{mutual information rate} = \text{source rate}.$$

The source rate is of course just

$$- \sum_{i=1}^m P_i \log P_i.$$

The correction rate is derived as follows: Whenever the letter y_j is received, it may be correct or incorrect. Since the probability that y_j originated from x_i is $p_j(i) = p(i,j)/P_j$, $1 \leq i, j \leq m$, whenever y_j is received we must supply an amount of entropy

$$- \sum_{i=1}^m p_j(i) \log p_j(i)$$

to correct it or to leave it stand uncorrected with the assurance that it is

*More precisely, the average rate of correction entropy.

correct. Since the letter y_j is received with probability P'_j , the average rate at which correction entropy must be supplied is

$$- \sum_{j=1}^m P'_j \sum_{i=1}^m p_j(i) \log p_j(i) = - \sum_{i=1}^m \sum_{j=1}^n p(i,j) \log \frac{p(i,j)}{P'_j}.$$

Since

$$\sum_{j=1}^m p_{ij} = 1,$$

we can also write the source rate as

$$- \sum_{i=1}^m \sum_{j=1}^m P_i p_{ij} \log P_i = - \sum_{i=1}^m \sum_{j=1}^m p(i,j) \log P_i.$$

Finally, using (4), we obtain

$$\text{mutual information rate} \equiv R(\vec{P}) =$$

$$\begin{aligned} & - \sum_{i=1}^m \sum_{j=1}^m p(i,j) \log P_i + \sum_{i=1}^m \sum_{j=1}^m p(i,j) \log \frac{p(i,j)}{P'_j} \\ & = \sum_{i=1}^m \sum_{j=1}^m p(i,j) \log \frac{p(i,j)}{P_i P'_j}, \end{aligned}$$

which agrees with (3) for the case $m = n$.

In what follows we shall find it convenient to introduce the symbol $\langle \rangle$ (angular brackets) to denote averaging with respect to the joint probability distribution $p(i,j)$, i.e., if $f(i,j)$ is a function of the two

integral arguments i and j , where $1 \leq i \leq m$, $1 \leq j \leq n$, then

$$\langle f(i,j) \rangle = \sum_{i=1}^m \sum_{j=1}^n p(i,j) f(i,j) .$$

With this notation (3) becomes

$$\vec{R}(P) = -\langle \log P(i) \rangle + \langle \log p_j(i) \rangle = \langle \log \frac{p(i,j)}{P_i P'_j} \rangle .$$

As an example of (3), consider the general binary channel

$$(5) \quad C(\alpha, \beta) = \begin{vmatrix} \alpha & 1 - \alpha \\ \beta & 1 - \beta \end{vmatrix} , \quad 0 \leq \alpha, \beta \leq 1 ,$$

fed by a source producing 0's and 1's independently, with probabilities P_0 and $P_1 = 1 - P_0$, respectively. (Eq. (5) means that transmitted 0's are received as 0's with probability α , while transmitted 1's are received as 0's with probability β .) Then it is easily verified that the rate associated with (5) and the input vector

$$\vec{P} = \begin{vmatrix} P_0 \\ P_1 \end{vmatrix}$$

is

$$(6) \quad R(\alpha, \beta; \vec{P}) = \alpha P_0 \log(\alpha/P'_0) + (1-\alpha) P_0 \log((1-\alpha)/P'_1) + \beta P_1 \log(\beta/P'_0) + (1-\beta) P_1 \log((1-\beta)/P'_1),$$

where $P'_0 = \alpha P_0 + \beta(1 - P_0)$ is the probability of a received zero and $P'_1 = 1 - P'_0$ is the probability of a received 1.

4. Channel capacity

Following Shannon [2], we define the capacity $c(C)$ of the (discrete memoryless) channel C as the largest value of the rate which is achieved when the input probabilities are varied over all possible values, i.e.

$$(7) \quad c(C) = \underset{P}{\overset{\text{Max}}{\rightarrow}} R(\vec{P}) .$$

As an example consider the BSC where the channel matrix

$$C_{\text{sym}} = \begin{vmatrix} \alpha & \beta \\ \beta & \alpha \end{vmatrix}$$

is obtained by setting $\beta = 1 - \alpha$ in (5). In this case it is clear from symmetry (and it can be verified by direct calculation) that capacity is achieved for the choice $P_0 = P_1 = 1/2$, which implies $P'_0 = P'_1 = 1/2$ as well. Substituting these values in (6) and using $\beta = 1 - \alpha$, we find

$$c(C_{\text{sym}}) = 1 + \alpha \log \alpha + \beta \log \beta$$

for the capacity of the BSC.

The fundamental importance of the channel capacity as an information-theoretic quantity stems from the role that it plays in Shannon's second coding theorem (the so-called noisy coding theorem), which it is safe to say contains most of the substantive content and technical promise of information theory (taken together with corresponding studies of finite-length block coding like [1]). This theorem asserts that with proper encoding it is possible to transmit information at any rate less than capacity with arbitrarily small

probability of error, provided that the block length of the code is long enough, and furthermore that regardless of the encoding scheme, errors will always be made if one attempts to transmit information at a rate greater than capacity. Much space has been devoted in the literature to a rigorous demonstration of this theorem for an appropriately large class of sources and channels, and the whole subject is a difficult one which we shall not go into here. The interested reader is referred to the papers of Khinchin [3] and the book by Feinstein [7]; the latter author played an important role in developing a rigorous proof of the noisy coding theorem.

We turn now to the question of how the mathematical operation symbolized by (7) is to be carried out in general. This operation involves more than a simple maximization problem, since the vector $\vec{P}$ in question is subject to the constraint that it be a vector with non-negative components which add up to unity. We begin by writing (3) in a form which explicitly exhibits its dependence on the input probabilities P_i ; this form is

$$(8) R(\vec{P}) = -\langle \log P_j^i \rangle + \langle \log p_{ij} \rangle = -\sum_{i=1}^m \sum_{j=1}^n P_i p_{ij} \log \sum_{i=1}^m P_i p_{ij} + \sum_{i=1}^m \sum_{j=1}^n P_i p_{ij} \log p_{ij}.$$

To incorporate the constraint*

$$\sum_{i=1}^m P_i = 1,$$

we add

$$\lambda \sum_{i=1}^m P_i$$

*For the time being we neglect the additional constraint that $P_i \geq 0$, $1 \leq i \leq m$, which will be discussed below in connection with Muroga's work.

to (8), where λ is an undetermined Lagrange multiplier. Differentiating the sum of these two terms with respect to P_i , $1 \leq i \leq m$, and equating the result to zero, we obtain

$$(9) \quad \sum_{j=1}^n p_{ij} \log \frac{p_{ij}}{\sum_{i=1}^m p_i p_{ij}} = \mu, \quad 1 \leq i \leq m,$$

where $\mu = \lambda - (1/\log e)$ is a new constant. Multiplying (9) by P_i and summing over i , we find that

$$\mu = c,$$

where c is the capacity of the channel C .

Suppose now that the channel C under consideration, with channel matrix (2), is square ($m = n$) and that $\det(C)$, the determinant of (2), is non-vanishing. Then the inverse matrix C^{-1} , satisfying the matrix equation

$$(10) \quad CC^{-1} = C^{-1}C = I$$

(where I denotes the unit matrix) exists. If we denote the elements of C^{-1} by p_{ij}^{-1} , $1 \leq i, j \leq m$, then (10) reads

$$\sum_{j=1}^m p_{ij} p_{jk}^{-1} = \sum_{j=1}^m p_{ij}^{-1} p_{jk} = \delta_{ik}, \quad 1 \leq i, k \leq m,$$

where δ_{ik} is the Kronecker delta symbol, equal to 1 when $i = k$ and 0 when $i \neq k$. Multiplying (9) by p_{ki}^{-1} and summing over i , we obtain

$$\sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} - \log \sum_{i=1}^m p_i p_{ik} = \mu \sum_{i=1}^m p_{ki}^{-1}, \quad 1 \leq k \leq m.$$

Hence

$$\sum_{i=1}^m P_i p_{ik} = \exp \left\{ -c \sum_{i=1}^m p_{ki}^{-1} + \sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} \right\}, \quad 1 \leq k \leq m,$$

where by $\exp(x)$ we mean 2^x , the base appropriate to our choice of units.

Multiplying by p_{kj}^{-1} and summing over k , we obtain

$$(11) \quad P_i = \sum_{k=1}^m p_{ki}^{-1} \exp \left\{ -c \sum_{i=1}^m p_{ki}^{-1} + \sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} \right\}, \quad 1 \leq i \leq m.$$

Finally, following Muroga [8], we note that

$$(12) \quad \sum_{j=1}^m p_{ij}^{-1} = \sum_{j=1}^m p_{ij}^{-1} \sum_{k=1}^m p_{jk} = \sum_{k=1}^m \delta_{ik} = 1,$$

so that (11) can be simplified to

$$(13) \quad P_i = \sum_{k=1}^m p_{ki}^{-1} \exp \left\{ -c + \sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} \right\}, \quad 1 \leq i \leq m.$$

Thus, the channel capacity is the number c which when substituted in (13)

gives $P_i \geq 0$ and

$$\sum_{i=1}^m P_i = 1.$$

Then with this value of c , (13) gives the corresponding rate-maximizing

values of the input probabilities P_i , $1 \leq i \leq m$. Explicitly, we form the

sum

$$\sum_{\ell=1}^m P_{\ell} = 1$$

and use the relation (12) again, obtaining

$$1 = \sum_{k=1}^m \sum_{j=1}^m p_{kj}^{-1} \exp \left\{ -c + \sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} \right\} =$$

$$= \sum_{k=1}^m \exp \left\{ -c + \sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} \right\} .$$

Solving for c , we get

$$(14) \quad c = \log \left[\sum_{k=1}^m \exp \left\{ \sum_{i=1}^m \sum_{j=1}^m p_{ki}^{-1} p_{ij} \log p_{ij} \right\} \right],$$

where it will be recalled that both $\log$ and $\exp$ are taken to the base 2.

Computations are simplified by defining (after Muroga [8]) the auxiliary vector

$$\vec{X} = \begin{pmatrix} X_1 \\ X_2 \\ \vdots \\ X_m \end{pmatrix}$$

which satisfies the matrix equation

$$(15) \quad C \vec{X} = -\vec{H} ,$$

where $\vec{H}$ is the row-entropy vector of the channel C , i.e. the vector

$$(16) \quad \vec{H} = \begin{pmatrix} -\sum_{i=1}^m p_{1i} \log p_{1i} \\ -\sum_{i=1}^m p_{2i} \log p_{2i} \\ \dots \\ -\sum_{i=1}^m p_{mi} \log p_{mi} \end{pmatrix}$$

It follows from (15) and (16) that $\vec{X} = -C^{-1} \vec{H}$, i.e. that

$$X_i = \sum_{j=1}^m p_{ij}^{-1} \sum_{k=1}^m p_{jk} \log p_{jk}, \quad 1 \leq i \leq m,$$

so that in terms of the components of $\vec{X}$, (14) becomes simply

$$(17) \quad c = \log \sum_{i=1}^m \exp X_i.$$

Moreover (13) becomes

$$P_i = \exp(-c) \sum_{k=1}^m p_{ki}^{-1} \exp X_k, \quad 1 \leq i \leq m.$$

Since

$$p_{ki}^{-1} = \text{cof}(p_{ik}) / \det(C),$$

where $\text{cof}(p_{ik})$ is the cofactor of the element p_{ik} , we finally have

$$(18) \quad P_i = \frac{\exp(-c)}{\det(C)} \det \begin{vmatrix} p_{11} & \dots & p_{1m} \\ \dots & \dots & \dots \\ \exp(X_1) & \dots & \exp(X_m) \\ \dots & \dots & \dots \\ p_{m1} & \dots & p_{mm} \end{vmatrix},$$

where the matrix in (18) differs from the channel matrix C by having the entries $\exp(X_1), \dots, \exp(X_m)$ instead of $p_{i1}, \dots, p_{im}$ in the i 'th row.

The method just described requires modification if it leads to negative input probabilities, and more generally if $\det(C) = 0$ or the sizes of the input

and output alphabets are different. Details of how to deal with these various cases are given in Muroga's paper [8], to which the interested reader is referred. There is also available a different and more easily visualized approach to the general problem of capacity due to Shannon [9].

We conclude our present discussion by discussing a one-parameter family of ternary channels which for suitable values of the parameter leads to a negative probability for one of the input symbols, which must therefore then be suppressed according to Muroga. Consider the channel

$$C = \begin{vmatrix} \alpha & 1-\alpha & 0 \\ \frac{1}{2} & 0 & \frac{1}{2} \\ 0 & 1-\alpha & \alpha \end{vmatrix},$$

where $0 \leq \alpha \leq 1$. The inverse matrix is

$$C^{-1} = \begin{vmatrix} \frac{1}{2\alpha} & 1 & -\frac{1}{2\alpha} \\ \frac{1}{2(1-\alpha)} & \frac{\alpha}{\alpha-1} & \frac{1}{2(1-\alpha)} \\ -\frac{1}{2\alpha} & 1 & \frac{1}{2\alpha} \end{vmatrix}.$$

The row-entropy vector is

$$\vec{H} = \begin{vmatrix} H \\ 1 \\ H \end{vmatrix}$$

and the vector $\vec{X}$ is

$$\vec{X} = \begin{pmatrix} -1 \\ -\frac{H-\alpha}{1-\alpha} \\ -1 \end{pmatrix},$$

where

$$H = -\alpha \log \alpha - (1-\alpha) \log (1-\alpha).$$

Using (17) and (18) we find that the symbol corresponding to the middle row of C should be used with the probability

$$p = \frac{1 + \frac{\alpha}{\alpha-1} \exp\left(-\frac{H-\alpha}{1-\alpha}\right)}{1 + \exp\left(-\frac{H-\alpha}{1-\alpha}\right)}$$

if capacity is to be achieved. This symbol should be suppressed when the numerator goes negative. This happens when $\alpha > \alpha_0$, where α_0 is the solution of

$$\frac{H(\alpha_0) - \alpha_0}{1 - \alpha_0} = \log \frac{\alpha_0}{1 - \alpha_0},$$

or

$$(19) \quad \log \alpha_0 = -\alpha_0.$$

The solution of the transcendental equation (19) is $\alpha_0 \sim 0.641$. When $p > 0$, the capacity of the channel is

$$\log \left\{ 1 + \exp\left(-\frac{H-\alpha}{1-\alpha}\right) \right\} \text{ bits/second},$$

whereas when $p \leq 0$, the channel matrix reduces to

$$\begin{vmatrix} \alpha & 1-\alpha & 0 \\ 0 & 1-\alpha & \alpha \end{vmatrix}$$

This is the matrix of the binary erasure channel (BEC), i.e. the channel in which 0's and 1's are transmitted and 0's, 1's and x's are received; α is the probability that a 0 or 1 is received correctly and $1-\alpha$ the probability that a 0 or 1 is received as an x. Since received 0's and 1's are always correct, whereas a received x is always wrong and equally likely to have come from a 0 or a 1, the capacity of the BEC is obviously α bits/second. It is interesting to note that the capacity of C is 1 bit/second both when $\alpha = 0$ and $\alpha = 1$, but when $\alpha = 0$ the symbol corresponding to the middle row should be sent, whereas when $\alpha = 1$ it should be suppressed.

5. The general binary channel

Using Muroga's method, Silverman [10] has made a detailed study of the general binary channel $C(\alpha, \beta)$ defined by (5)*. We sketch without proof some of the results obtained in his paper:

1) The capacity $c(\alpha, \beta)$ of the general binary channel is given by the formula

$$c(\alpha, \beta) = \frac{-\beta H(\alpha) + \alpha H(\beta)}{\beta - \alpha} + \log \left[1 + \exp \left(\frac{H(\alpha) - H(\beta)}{\beta - \alpha} \right) \right].$$

The function $c(\alpha, \beta)$ has the symmetries

$$c(\alpha, \beta) = c(\beta, \alpha) = c(1 - \alpha, 1 - \beta) = c(1 - \beta, 1 - \alpha),$$

*Loeb [11] has also studied some aspects of the general binary channel.

and defines a surface over the unit square $0 \leq \alpha, \beta \leq 1$. Lines of constant $c(\alpha, \beta)$ are shown in Fig. 1

2) Capacity is achieved if 0's are transmitted with probability

$$P_0(\alpha, \beta) = \beta(\beta - \alpha)^{-1} - (\beta - \alpha)^{-1} \left[1 + \exp \left(\frac{H(\beta) - H(\alpha)}{\beta - \alpha} \right) \right]^{-1}.$$

$P_0(\alpha, \beta)$ satisfies the relation

$$0.37 \sim \frac{1}{e} \leq P_0(\alpha, \beta) \leq 1 - \frac{1}{e} \sim 0.63,$$

which explains the footnote in Section 1. The function $P_0(\alpha, \beta)$ is discontinuous at the points $\alpha = \beta = 0$ and $\alpha = \beta = 1$; it has the symmetries

$$P_0(\alpha, \beta) = P_0(1 - \alpha, 1 - \beta) = 1 - P_0(\beta, \alpha) = 1 - P_0(1 - \beta, 1 - \alpha).$$

Lines of constant $P_0(\alpha, \beta)$ are shown in Fig. 2.

3) At capacity, 0's are received with probability

$$P'_0(\alpha, \beta) = \left[1 + \exp \left(\frac{H(\beta) - H(\alpha)}{\beta - \alpha} \right) \right]^{-1}.$$

The function $P'_0(\alpha, \beta)$ has the symmetries

$$P'_0(\alpha, \beta) = P'_0(\beta, \alpha) = 1 - P'_0(1 - \alpha, 1 - \beta) = 1 - P'_0(1 - \beta, 1 - \alpha).$$

Lines of constant $P'_0(\alpha, \beta)$ are shown in Fig. 3.

The reader interested in other properties of the general binary channel, e.g., the form of the channels giving the maximally asymmetric input probability distributions ($P_0 \sim 1/e$ or $P_0 \sim 1 - 1/e$), the probability of error for the

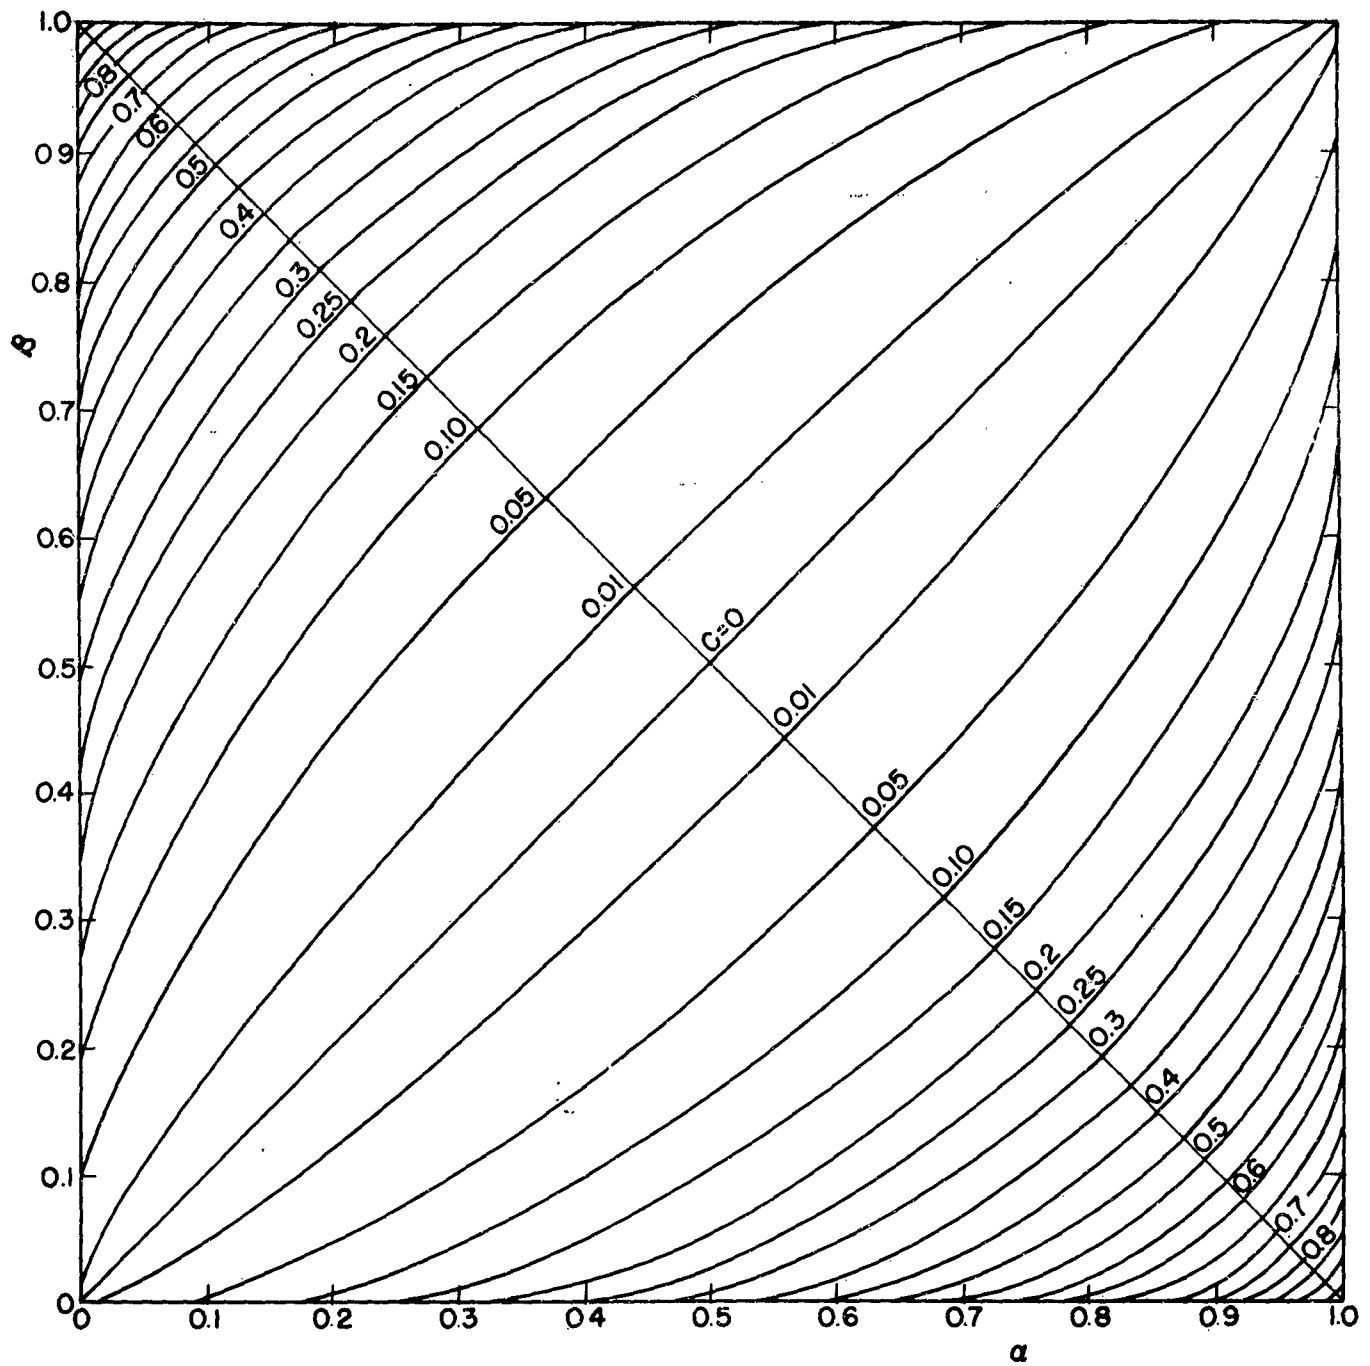


Fig. 1 - Lines of constant $c(\alpha, \beta)$.

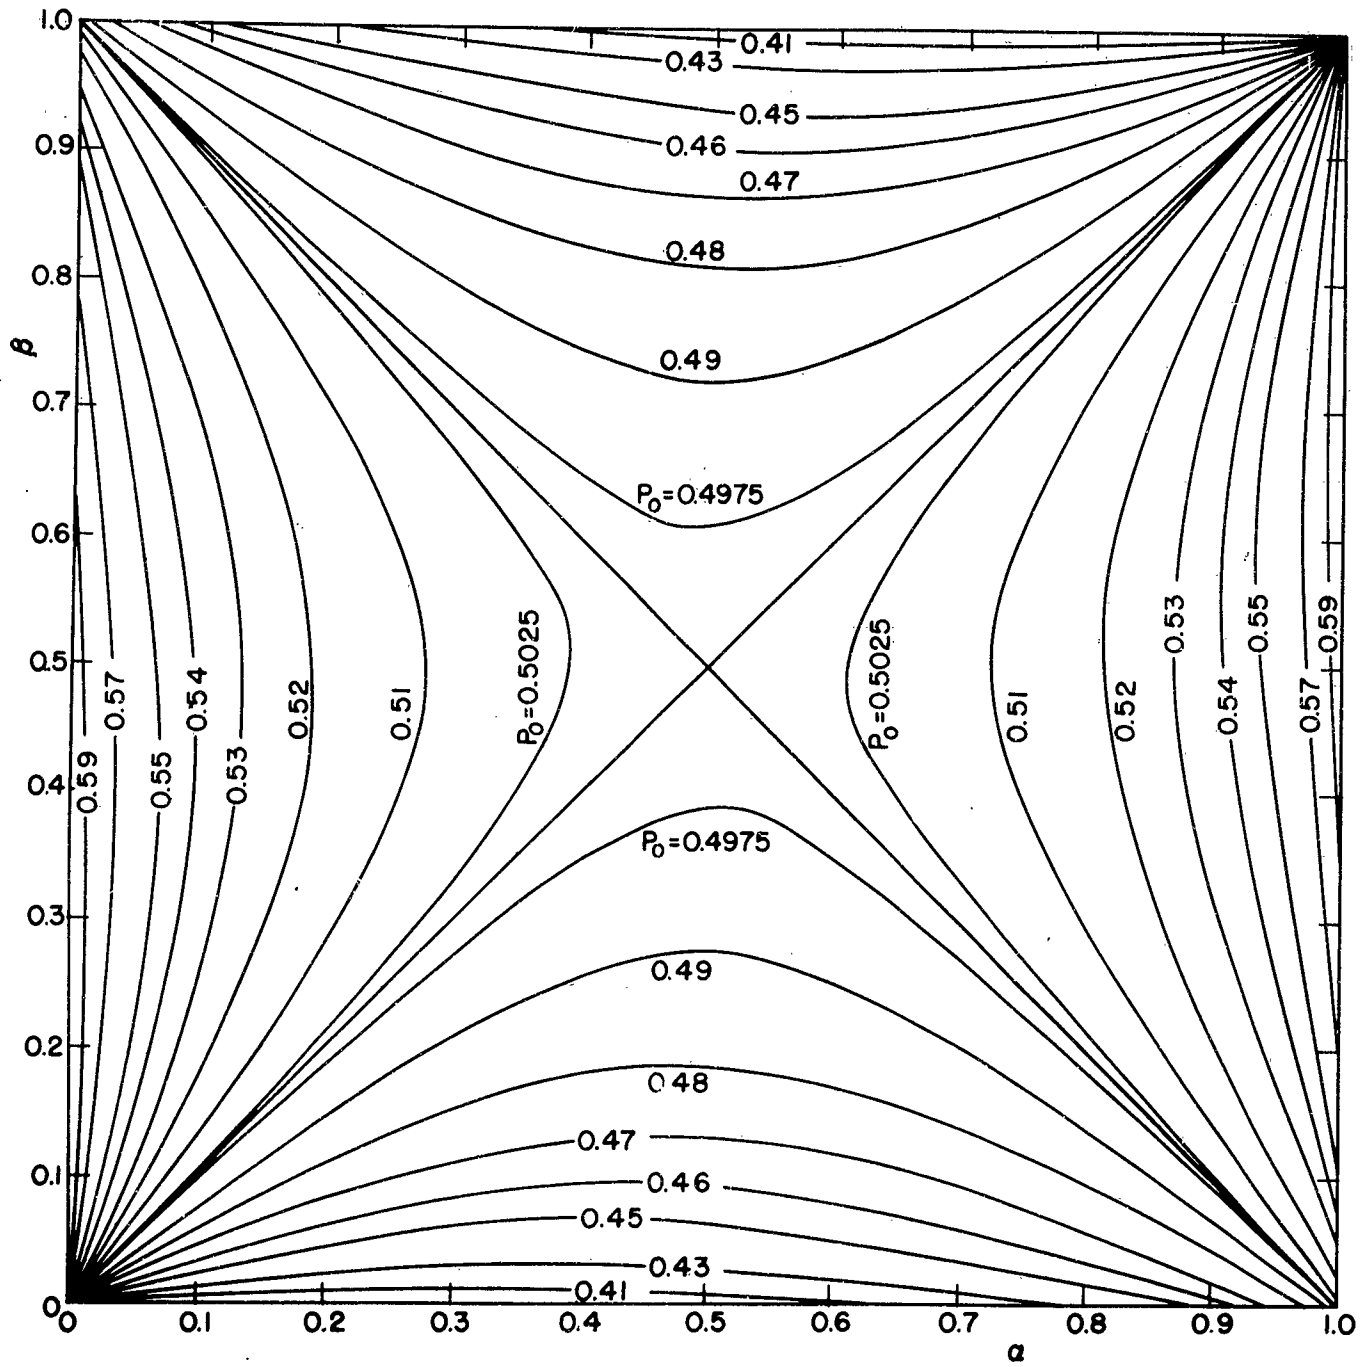


Fig. 2 - Lines of constant $P_0(\alpha, \beta)$.

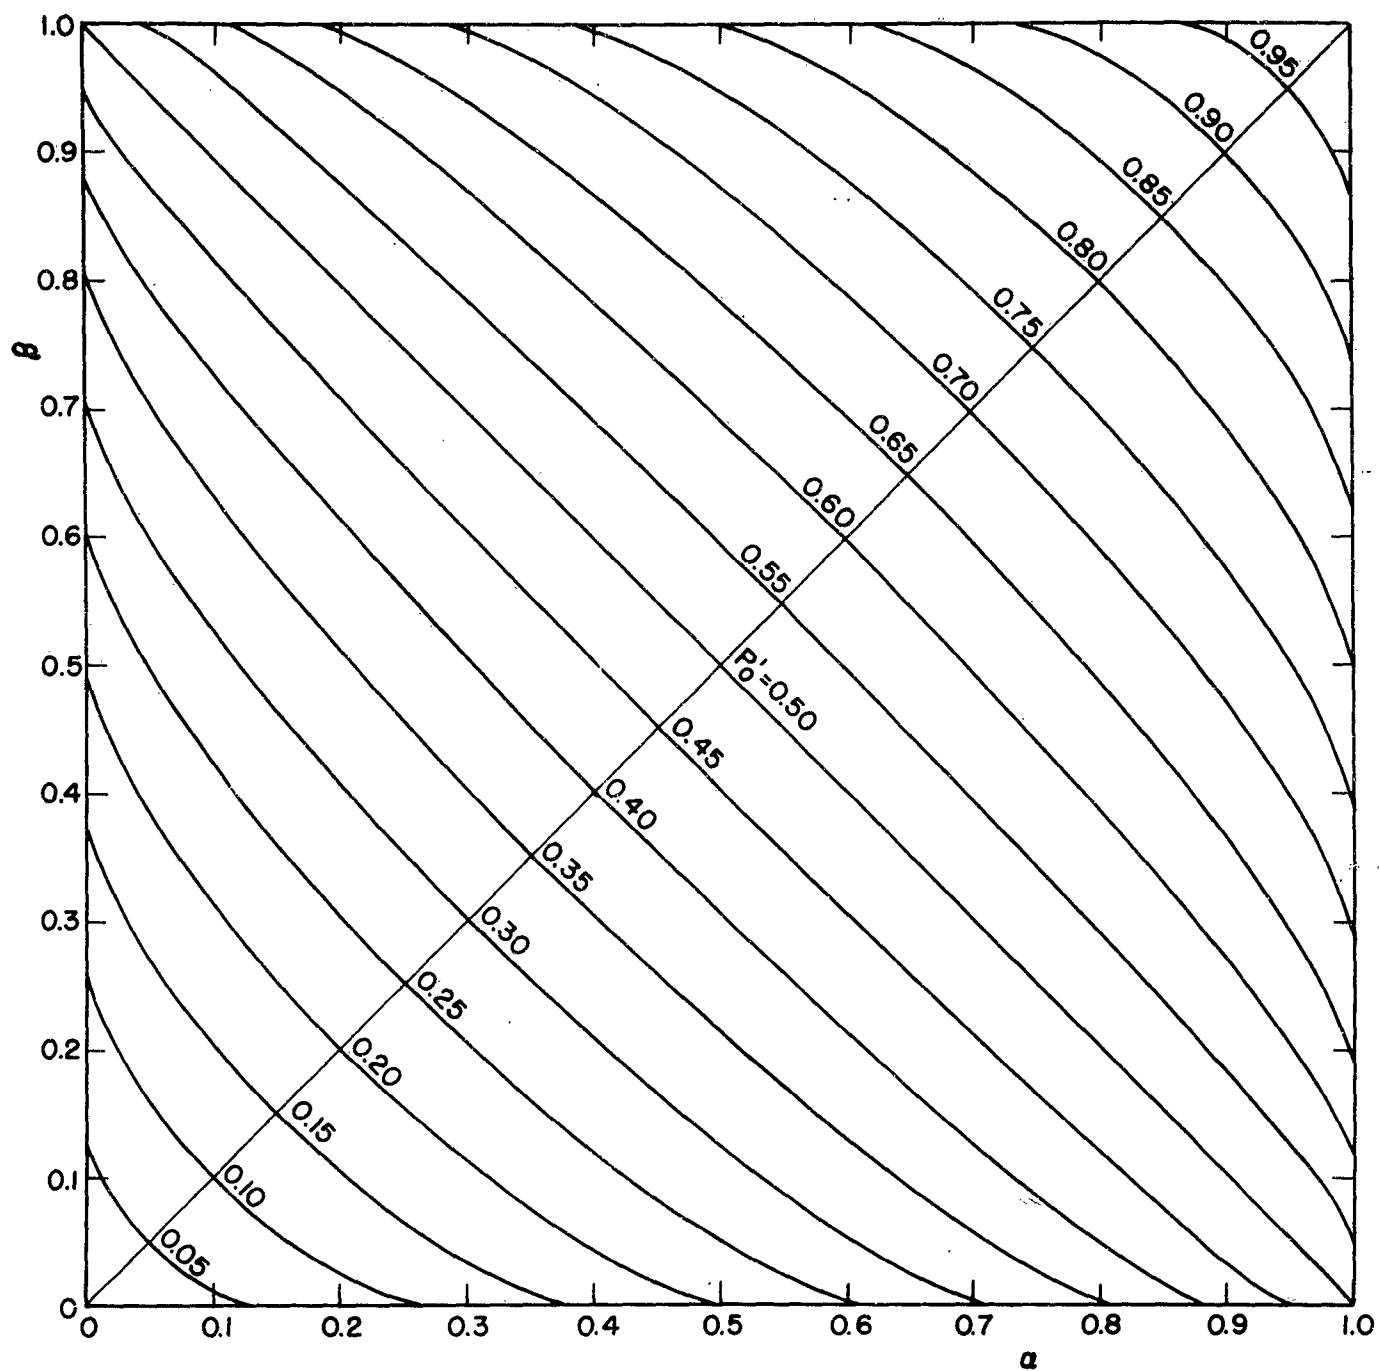


Fig. 3 - Lines of constant $P'_0(a, \beta)$.

general binary channel, etc., is referred to Silverman's paper [10].

6. Channels with fading

The communication situation dealt with so far can be indicated schematically by the diagram

$$T \rightarrow C \rightarrow R ,$$

i.e., information is sent from a transmitter T to a receiver R through a channel C , characterized by a stochastic matrix (see Section 3). (We make no distinction between the primary information source S of Section 2 and the transmitter T , although in general there is the problem of (noiselessly) encoding the output of S so as to match the input of T .) We now consider the following generalization of this situation: Instead of one (memoryless) channel C , let there be a family of (memoryless) channels C_α , where the index α ranges from 1 to s , and let the channel which is actually present at a given time of transmission depend on the state of a random device N (N for "nature"). Schematically, we have





$$\begin{array}{c} N \\ \downarrow \\ T \rightarrow C \rightarrow R , \end{array}$$

i.e., information is sent from the transmitter T to the receiver R through the channel C , the state of which depends on the state of nature N . We assume that the state α , $1 \leq \alpha \leq s$, chosen by nature is statistically independent of past and future states of N and of the transmitted sequences as well; let p_α be the probability that nature chooses the state α . The channel C is now represented by the family of stochastic matrices

$$C_a = \begin{vmatrix} p_{11}(\alpha) & p_{12}(\alpha) & \dots & p_{1n}(\alpha) \\ p_{21}(\alpha) & p_{22}(\alpha) & \dots & p_{2n}(\alpha) \\ \dots & \dots & \dots & \dots \\ p_{m1}(\alpha) & p_{m2}(\alpha) & \dots & p_{mn}(\alpha) \end{vmatrix}, \quad 1 \leq \alpha \leq s.$$

Since the transition probabilities $p_{ij}(\alpha)$ are now random variables, a new element of randomness has entered into the problem. Such a model might be used to give an abstract representation of communication in the presence of "fading", and with this in mind we refer to the totality of channels C_a , $1 \leq a \leq s$, as a channel with fading.

A natural problem in the theory of channels with fading is that of finding the channel capacity for various conditions of knowledge of N at the transmitter and receiver. There are four possible cases, which can be schematically represented as follows:



Case 1, which we have already encountered, represents the situation in which neither the transmitter nor the receiver knows nature's state, so that N is effectively just more noise in addition to that already included in C . Case 2 is the situation in which the receiver but not the transmitter knows nature's state. Case 3 is the situation in which both the transmitter and the receiver know nature's state, and Case 4 is the situation in which the transmitter but not the receiver knows nature's state. We now give expressions for the capacity in all four cases.

Let $p(\alpha, i, j)$ be the joint probability that nature chooses the state α , that x_i is transmitted and that y_j is received. In cases 1 and 2, where the transmitter is ignorant of nature's state, we have

$$(20) \quad p(\alpha, i, j) = p_\alpha P_i p_{ij}(\alpha) \quad .$$

In case 3, where the transmitter's action can depend on nature's state, we have

$$(21) \quad p(\alpha, i, j) = p_\alpha P_{i,\alpha} p_{ij}(\alpha) \quad ,$$

where $P_{i,\alpha}$ is the probability of choosing x_i , given that nature's state is α .

(Case 4 requires special treatment; see below.) Generalizing the angular bracket notation of Section 3, we write

$$\langle f(\alpha, i, j) \rangle = \sum_{\alpha=1}^s \sum_{i=1}^m \sum_{j=1}^n p(\alpha, i, j) f(\alpha, i, j) \quad .$$

We now derive expressions for the channel capacity in the four different cases.

Case 1. Since neither the transmitter nor the receiver knows nature's

state, the channel has the same capacity as the average channel

$$\bar{C} = \sum_{\alpha=1}^s p_{\alpha} C_{\alpha}$$

with transition probabilities

$$\bar{p}_{ij} = \sum_{\alpha=1}^s p_{\alpha} p_{ij}(\alpha) \quad .$$

Explicitly we have, from (8)

$$c_1 = \underset{P}{\text{Max}} \left\langle \log \frac{\bar{p}_{ij}}{\sum_{i=1}^m p_i \bar{p}_{ij}} \right\rangle$$

for the capacity in this case.

Case 2. Since now the receiver can use its knowledge of the pair (α, y_j) to infer x_i , we have, from (3)

$$(22) \quad c_2 = \underset{P}{\text{Max}} \left\langle \log \frac{p(\alpha, i, j)}{P_i p(\alpha, j)} \right\rangle$$

for the capacity in this case, where $p(\alpha, j)$ is the probability of the pair (α, y_j) , i.e.

$$p(\alpha, j) = \sum_{i=1}^m p(\alpha, i, j) \quad .$$

Using (20) we can rewrite (22) as

$$(23) \quad c_2 = \underset{P}{\text{Max}} \left\langle \log \frac{p_{1j}(\alpha)}{\sum_{i=1}^m p_i p_{1j}(\alpha)} \right\rangle .$$

Let $R_\alpha(\vec{P})$ be the rate in the channel C_α when using the input vector $\vec{P}$. Then (23) is just

$$(24) \quad c_2 = \underset{P}{\text{Max}} \sum_{\alpha=1}^s p_\alpha R_\alpha(\vec{P}) .$$

In other words, the capacity in case 2 is the maximum average rate when driving all the channels C_α with the same input probability vector $\vec{P}$. Clearly, $c_2 \geq c_1$, since we are now using more detailed knowledge of the channel.

Case 3. Now the transmitter can base its choice of input probabilities on nature's state, choosing a suitable input vector

$$\vec{P}_\alpha = \begin{pmatrix} p_{1,\alpha} \\ p_{2,\alpha} \\ \vdots \\ p_{m,\alpha} \end{pmatrix}$$

for each state, $1 \leq \alpha \leq s$. Moreover, as in case 2, the receiver has the pair (α, y_j) available to infer x_1 . Therefore we have

$$(25) \quad c_3 = \underset{P_\alpha}{\text{Max}} \left\langle \log \frac{p(\alpha, i, j)}{p_{1,\alpha} p(\alpha, j)} \right\rangle$$

for the capacity in this case, where the maximization is over all $\vec{P}_\alpha$, $1 \leq \alpha \leq s$. Using (21), we can rewrite (25) as

$$c_3 = \underset{P_\alpha}{\text{Max}} \sum_{\alpha=1}^s p_\alpha R(\vec{P}_\alpha) .$$

In other words, the capacity in case 3 is the maximum average rate when driving each channel C_α with its own input probability vector $\vec{P}_\alpha$. It follows at once that

$$(26) \quad c_3 = \sum_{\alpha=1}^s p_\alpha c(C_\alpha) ,$$

i.e., the capacity is just the average capacity of the channels C_α , $1 \leq \alpha \leq s$. Clearly $c_3 \geq c_2$, since now the transmitter as well as the receiver is using the extra information about the channel.

Case 4 is more complicated. In this case Shannon [12] has shown that the capacity of the channel with fading is the same as the capacity of a new $m^s \times n$ (non-fading) channel C' , with input letters consisting of the m^s s-tuples $(x_{i_1}, x_{i_2}, \dots, x_{i_s})$, $1 \leq i_1, i_2, \dots, i_s \leq m$ and output letters consisting of the n letters y_j , $1 \leq j \leq n$, where the transition probabilities for C' are defined by

$$p_{i_1, i_2, \dots, i_s, j} = \sum_{\alpha=1}^s p_\alpha p_{i_\alpha j}(\alpha) .$$

Thus the capacity in this case is

$$c_4 = c(C') ,$$

and clearly $c_1 \leq c_4 \leq c_3$. We now give two examples which illustrate the various cases.

Example 1. Suppose nature has two states 1 and 2 with probabilities α and β , respectively, and suppose

$$c_1 = \begin{vmatrix} 1 & 0 \\ 0 & 1 \end{vmatrix}, \quad c_2 = \begin{vmatrix} 0 & 1 \\ 1 & 0 \end{vmatrix}.$$

Then the average channel $\bar{C}$ is the BSC, i.e.

$$\bar{C} = \alpha c_1 + \beta c_2 = \begin{vmatrix} \alpha & \beta \\ \beta & \alpha \end{vmatrix},$$

so that $c_1 = 1 + \alpha \log \alpha + \beta \log \beta$ bits/second (see Section 4). If nature's state is known by the receiver or by both the transmitter and the receiver, then the capacity of the fading channel is obviously 1 bit/second, achieved by transmitting 0's and 1's with equal probability and interchanging 0's and 1's at the receiver when the channel is in state 2. Eqs. (24) and (26) confirm that $c_2 = c_3 = 1$. When only the transmitter knows nature's state, the capacity is again 1 bit/second, achieved by transmitting 0's and 1's with equal probability and interchanging 0's and 1's at the transmitter when the channel is in state 2. In this instance (case 4) Shannon's construction asserts that $c_4 = c(C')$, where

$$C' = \begin{vmatrix} \alpha & \beta \\ 1 & 0 \\ 0 & 1 \\ \beta & \alpha \end{vmatrix}.$$

Denoting the rows of this matrix by the vectors $\vec{A}_1, \dots, \vec{A}_4$ (e.g. $\vec{A}_1 = (\alpha, \beta)$), we have

$$\vec{A}_1 = \alpha \vec{A}_2 + \beta \vec{A}_3$$

$$\vec{A}_4 = \beta \vec{A}_2 + \alpha \vec{A}_3 .$$

It follows by an argument due to Shannon [9] that the symbols corresponding to the first and fourth rows of C' have to be suppressed if capacity is to be achieved. Dropping the first and fourth rows of C' , we get the matrix C_1 , so that $c_4 = c(C_1) = 1$ bit/second, as required.

Example 2. Let there be three states with equal probability, and let

$$C_1 = \begin{vmatrix} 1 & 0 \\ \frac{1}{2} & \frac{1}{2} \end{vmatrix}, \quad C_2 = \begin{vmatrix} \frac{1}{2} & \frac{1}{2} \\ \frac{1}{2} & \frac{1}{2} \end{vmatrix}, \quad C_3 = \begin{vmatrix} \frac{1}{2} & \frac{1}{2} \\ 0 & 1 \end{vmatrix} .$$

Then if neither the transmitter nor the receiver knows nature's state, the capacity of the fading channel is that of the average channel

$$\bar{C} = \begin{vmatrix} \frac{2}{3} & \frac{1}{3} \\ \frac{1}{3} & \frac{2}{3} \end{vmatrix} ,$$

i.e. $c_1 = c(\bar{C}) = 1 + (1/3) \log (1/3) + (2/3) \log (2/3) = (5/3) - \log 3 \sim .082$ bits/second. If only the receiver knows nature's state, then by (24)

$$c_2 = \max_P \frac{1}{3} [R_1(\vec{P}) + R_2(\vec{P}) + R_3(\vec{P})] .$$

By symmetry, the maximum is achieved for

$$\vec{P} = \begin{pmatrix} \frac{1}{2} \\ \frac{1}{2} \end{pmatrix},$$

and an elementary calculation shows that $c_2 = 1 - (1/2) \log 3 \sim .208$ bits/second $> c_1$. If both the transmitter and the receiver know nature's state, then by (26)

$$c_3 = \frac{2}{3} c(C_1),$$

since $c(C_1) = c(C_3)$ and $c(C_2) = 0$. Applying Muroga's method (see Section 4), we easily find that $c(C_1) = \log 5 - 2$, so that $c_3 = \frac{2}{3} \log 5 - \frac{4}{3} \sim .215$ bits/second $> c_2^*$.

If the transmitter but not the receiver knows nature's state, then according to Shannon's construction, $c_4 = c(C')$, where

$$C' = \begin{pmatrix} 2 & 1 \\ 3 & 3 \\ 1 & 1 \\ 2 & 2 \\ 2 & 1 \\ 3 & 3 \\ 1 & 1 \\ 2 & 2 \\ 1 & 1 \\ 2 & 2 \\ 1 & 1 \\ 3 & 3 \\ 1 & 1 \\ 2 & 2 \\ 1 & 1 \\ 3 & 3 \end{pmatrix}$$

*Driving any binary channel with a source emitting 0's and 1's with equal probability leads to a rate very near capacity, which explains why c_3 is so near c_2 (see footnote to Section 1).

By a simple extension of the argument given in connection with the preceding example, we have

$$c_1 = c(C') = c(\bar{C}) = c_1 \sim .082 \text{ bits/second} ,$$

so that in this case, unlike example 1, the transmitter cannot use its knowledge of nature's state to increase the channel capacity.

7. Cascaded channels

Let C be an $\ell \times m$ channel matrix with output alphabet $y_1, \dots, y_m$, and let C' be an $m \times n$ channel matrix with input alphabet $y_1, \dots, y_m$ (i.e. identical to the output alphabet of C). Then we agree to apply y_1 to the input of C' whenever y_1 is received at the output of C ; this mode of channel combination is called cascading. Denote by p_{ij} and p'_{ij} the elements of the matrices C and C' , and denote by p''_{ij} the elements of the matrix C'' obtained by cascading C and C' , as just described. Then, since obviously

$$p''_{ij} = \sum_{k=1}^m p_{ik} p'_{kj} ,$$

C'' is obtained from C and C' by matrix multiplication, i.e. $C'' = CC'$. Since matrix multiplication is in general non-commutative, the same is true of channel cascading.

The problem of cascading identical binary channels $C(\alpha, \beta) = \begin{bmatrix} \alpha & 1-\alpha \\ \beta & 1-\beta \end{bmatrix}$ is especially simple, in view of the identity

$$(27) \quad C^n(\alpha, \beta) = \begin{bmatrix} \alpha^{(n)} & 1-\alpha^{(n)} \\ \beta^{(n)} & 1-\beta^{(n)} \end{bmatrix} = \frac{1}{1-\alpha+\beta} \left\{ \begin{bmatrix} \beta & 1-\alpha \\ \beta & 1-\alpha \end{bmatrix} - (\alpha-\beta)^n \begin{bmatrix} \alpha-1 & 1-\alpha \\ \beta & -\beta \end{bmatrix} \right\} ,$$

which is easily derived from a general formula of matrix algebra (see e.g. [13]).

(We exclude the trivial cases $\alpha=1, \beta=0$ and $\alpha=0, \beta=1$, corresponding to the noiseless channels $\begin{vmatrix} 1 & 0 \\ 0 & 1 \end{vmatrix}$ and $\begin{vmatrix} 0 & 1 \\ 1 & 0 \end{vmatrix}$.) A number of simple consequences can be derived from (27):

1) Since $|\alpha - \beta| < 1$, we have

$$(28) \quad \lim_{n \rightarrow \infty} C^n(\alpha, \beta) = C^{(\infty)}(\alpha, \beta) = \frac{1}{1-\alpha+\beta} \begin{vmatrix} \beta & 1-\alpha \\ \beta & 1-\alpha \end{vmatrix} = \begin{vmatrix} \alpha^{(\infty)} & 1-\alpha^{(\infty)} \\ \beta^{(\infty)} & 1-\beta^{(\infty)} \end{vmatrix} .$$

The limiting channel $C^{(\infty)}(\alpha, \beta)$ obviously has zero capacity, in accord with the intuitive idea that an infinite cascade of noisy channels must destroy any information fed into it.

2) Since

$$\frac{-\beta^{(\infty)}}{1-\alpha^{(\infty)}} = \frac{\beta^{(n)} - \beta^{(\infty)}}{\alpha^{(n)} - \alpha^{(\infty)}} = \frac{\beta}{\alpha-1} ,$$

all the channels $C^n(\alpha, \beta)$ lie on a straight line in the (α, β) square passing through the point corresponding to the limiting channel $C^{(\infty)}(\alpha, \beta)$ and the point $(0,1)$. Thus, referring to Fig. 1, we have the following simple interpretation of the operation of cascading a binary channel with itself: Using (28), draw the straight line just described; then as n increases, $C^n(\alpha, \beta)$ approaches $C^{(\infty)}(\alpha, \beta)$ along this straight line, moving alternately from one side of the zero-capacity line $\alpha = \beta$ to the other if $\alpha - \beta < 0$.

The operation of channel cascading, or equivalently of multiplying channel matrices, is a partial ordering in the following sense: Given any two channels C_1 and C_2 , then C_1 is said to include C_2 , written $C_1 \supseteq C_2$, if there

exists a channel C such that $C_1 C = C_2$, i.e. if C_2 can be obtained from C_1 by cascading. Channel inclusion has the defining properties of a partial ordering, namely

- 1) $C \supseteq C$, for any C ;
- 2) $C_1 \supseteq C_2$, $C_2 \supseteq C_3$ implies $C_1 \supseteq C_3$.

On the other hand, given arbitrary channels C_1 and C_2 , neither of the relations $C_1 \supseteq C_2$, $C_2 \supseteq C_1$ may hold, i.e. C_1 and C_2 may not be comparable*.

In the case of binary channels, the structure of the partial ordering is very simply displayed. Suppose we have two binary channels

$$C = \begin{bmatrix} \alpha & 1-\alpha \\ \beta & 1-\beta \end{bmatrix}, \quad C' = \begin{bmatrix} \alpha' & 1-\alpha' \\ \beta' & 1-\beta' \end{bmatrix},$$

and assume, as we can without loss of generality, that $\beta \leq \alpha$, $\beta' \leq \alpha'$. Then, following a procedure suggested by Birnbaum (private communication), we first prove the following lemma:

A necessary and sufficient condition for $C \supseteq C'$ is that the interval (L_1, L_2) contain the interval (L'_1, L'_2) , where

$$L_1 = \beta/\alpha, \quad L'_1 = \beta'/\alpha', \quad L_2 = (1-\beta)/(1-\alpha), \quad L'_2 = (1-\beta')/(1-\alpha').$$

(Note that in our case $0 \leq L_1 \leq 1 \leq L_2 \leq \infty$, $0 \leq L'_1 \leq 1 \leq L'_2 \leq \infty$.)

To show the necessity, we suppose that

$$C'' = \begin{bmatrix} x & 1-x \\ y & 1-y \end{bmatrix}$$

*If $c(C)$ denotes the capacity of C , then $c(C) \geq c(C')$ is a necessary but not sufficient condition for $C \supseteq C'$.

is the channel such that $CC'' = C'$. Then, doing the matrix multiplication explicitly, we find that

$$L_1' = \beta'/\alpha' = \frac{\beta x + (1-\beta)y}{\alpha x + (1-\alpha)y} \geq \beta/\alpha = L_1, \quad ,$$

since $y \geq 0$, and

$$L_2' = (1-\beta')/(1-\alpha') = \frac{1-\beta x - (1-\beta)y}{1-\alpha x - (1-\alpha)y} \leq (1-\beta)/(1-\alpha) = L_2, \quad ,$$

since $x \leq 1$.

To show the sufficiency, we solve formally for the parameters x, y of C'' , finding

$$y = \frac{\alpha\beta' - \alpha'\beta}{\alpha - \beta}, \quad ,$$

$$x = \frac{\alpha' - \beta'}{\alpha - \beta} + y. \quad .$$

Since $\alpha' - \beta' \geq 0$, $\alpha - \beta \geq 0$, and $\alpha\beta' - \alpha'\beta \geq 0$ by the hypothesis that $L_1 \leq L_1'$, we see that $0 \leq y \leq x$. Moreover $y \leq x \leq 1$, since $\alpha\beta' - \alpha'\beta + \alpha' - \beta \leq \alpha - \beta$ is an easy consequence of the hypothesis $L_2' \leq L_2$. This completes the proof that $C \supseteq C'$ and $(L_1, L_2) \supseteq (L_1', L_2')$ are equivalent statements.

Using the lemma, we can give a simple geometrical model of the partial ordering of binary channels under cascading. Plot the point (α, β) corresponding to C in the unit square, and draw the straight lines from the point (α, β) to the points $(0,0)$ and $(1,1)$, as shown in Fig. 4. Then all the points in the region shaded with vertical lines represent channels contained in C , i.e. channels which can be obtained from C by cascading. This follows by applying the lemma in the part of the region lying below the line $\alpha=\beta$, and then noting that multiplication by $\begin{vmatrix} 0 & 1 \\ 1 & 0 \end{vmatrix}$ changes a channel into its reflection in the line $\alpha=\beta$. Moreover, it follows from this construction that all points

in the region shaded by horizontal lines represent channels containing C. Similarly, points lying outside of the shaded regions represent channels which are not comparable with C, i.e. which cannot be reached from C either by premultiplication or postmultiplication by any binary channel.

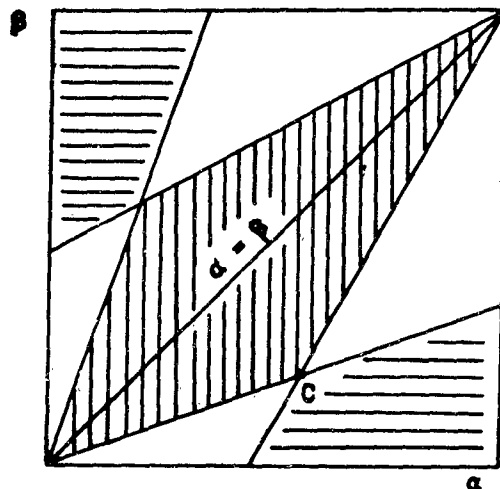


Fig. 4 - Illustrating the partial ordering of binary channels.

For further discussion of topics related to channel cascading, see Shannon [14], Birnbaum [15] and Silverman [10].

8. Channels with memory

We now consider a simple idealized communication system suggested by Chang [16], which leads naturally to the study of channels with memory. Let the channel input be a source emitting binary digits, and let the channel be such that 0's and 1's emitted at the time $t = 0$ are represented by the waveforms

$$f_0(t) = A \exp(-t/\tau),$$

$$f_1(t) = -A \exp(-t/\tau),$$

respectively, in the absence of noise*. The effect of noise will be represented by the addition of white Gaussian noise** of r.m.s. voltage σ . Suppose, to consider the simplest non-trivial case, that the source produces the digits in isolated doublets, i.e., let a pair of binary digits separated by an amount $\gamma \lesssim \tau$ be transmitted, and then let there be a pause in transmission long enough to allow substantially complete decay of the exponential $\exp(-t/\tau)$. Finally, suppose that we use synchronous, threshold detection at the receiver, i.e., at the times t_0 and $t_0 + \gamma$ corresponding to transmission of a doublet, we interpret a positive voltage as a 0 and a negative voltage as a 1.

We now proceed to find the capacity of this simple channel. At a time t_0 such that the channel has recovered from the effects of previous transmitted signals the channel is described by the matrix

$$C = \begin{vmatrix} \alpha & 1-\alpha \\ \beta & 1-\beta \end{vmatrix},$$

where

$$\alpha = \text{Prob} [f_0(0) + \xi > 0],$$

$$\beta = \text{Prob} [f_1(0) + \xi > 0],$$

and ξ is a Gaussian random variable with mean 0 and variance σ^2 . (Specifically,

*We have in mind, for example, a situation where 0's and 1's are encoded into sharp positive and negative pulses of amplitude A and then sent through a channel whose transmission characteristics resemble those of an RC filter with time constant τ .

**By "white" noise, we mean noise with a constant power spectral density, or equivalently with a correlation function which is a delta function. Gaussian white noise has no memory. This is, of course, a limiting case, approached only when the noise band width is much greater than that of the signals.

α is the probability that a 0 transmitted at time t_0 is interpreted as a 0, and β is the probability that a 1 transmitted at time t_0 is interpreted as a 0. Similarly, α_0, β_0 and α_1, β_1 are the corresponding probabilities at time $t_0 + \gamma$, under the hypothesis that a 0 or a 1 was transmitted at time t_0 , respectively (see below). Clearly we have

$$\alpha = \text{Prob} (\xi > -A) = 1 - F(-A) ,$$

$$\beta = \text{Prob} (\xi > A) = 1 - F(A) ,$$

where

$$F(x) = \frac{1}{\sqrt{2\pi} \sigma} \int_{-\infty}^x e^{-u^2/2\sigma^2} du$$

is the distribution function of the random variable ξ . It follows from the symmetry of $F(x)$ that $\alpha + \beta = 1$, i.e. that C is a symmetric channel. At the time $t_0 + \gamma$, there are two possibilities. If a 0 was transmitted at time t_0 , then the channel is described by the matrix

$$C_0 = \begin{vmatrix} \alpha_0 & 1-\alpha_0 \\ \beta_0 & 1-\beta_0 \end{vmatrix} ,$$

where

$$\alpha_0 = \text{Prob} [f_0(0) + f_0(\gamma) + \xi > 0] = 1 - F[-A(1+p)] ,$$

$$\beta_0 = \text{Prob} [f_0(0) + f_1(\gamma) + \xi > 0] = 1 - F[-A(1-p)] ,$$

and $p = \exp(-\gamma/\tau)$. Clearly we have $\alpha_0 + \beta_0 > 1$ and C_0 is asymmetric.

Similarly, if a 1 was transmitted at t_0 , then at time $t_0 + \gamma$ the channel is

described by the matrix

$$C_1 = \begin{vmatrix} \alpha_1 & 1-\alpha_1 \\ \beta_1 & 1-\beta_1 \end{vmatrix},$$

where

$$\alpha_1 = \text{Prob} [f_1(0) + f_0(\gamma) + \xi > 0] = 1 - F[A(1-\rho)],$$

$$\beta_1 = \text{Prob} [f_1(0) + f_1(\gamma) + \xi > 0] = 1 - F[A(1+\rho)].$$

This time $\alpha_1 + \beta_1 < 1$ and again C_1 is asymmetric.

To find the capacity of the channel with memory, it is simplest to proceed on a doublet basis and enlarge the channel to a new 4×4 memoryless channel C' , with inputs and outputs consisting of the four pairs 00, 01, 10 and 11. Thus, we consider the 4×4 channel matrix

$$C' = \begin{vmatrix} \alpha C_0 & (1-\alpha)C_0 \\ \beta C_1 & (1-\beta)C_1 \end{vmatrix},$$

whose elements are themselves 2×2 matrices. Following Chang [16], we find the capacity of C' by using Muroga's method (see Section 4). The row-entropy vector $\vec{H}'$ of C' is easily seen to be

$$\vec{H}' = \begin{vmatrix} H(\alpha) + H(\alpha_0) \\ H(\alpha) + H(\beta_0) \\ H(\beta) + H(\alpha_1) \\ H(\beta) + H(\beta_1) \end{vmatrix} = \begin{vmatrix} H(\alpha) \vec{U} + \vec{H}_0 \\ H(\beta) \vec{U} + \vec{H}_1 \end{vmatrix},$$

where $\vec{U}$ denotes the vector $\begin{bmatrix} 1 \\ 1 \end{bmatrix}$, and $\vec{H}_0, \vec{H}_1$ are the two-dimensional row-entropy vectors of the channels C_0, C_1 , respectively. Now we must find the auxiliary vector $\vec{X}'$ satisfying

$$\vec{X}' = -C'^{-1} \vec{H}'.$$

Since C' can be written as

$$C' = \begin{bmatrix} C_0 & 0 \\ 0 & C_1 \end{bmatrix} \begin{bmatrix} \alpha & 1-\alpha \\ \beta & 1-\beta \end{bmatrix},$$

we have

$$C'^{-1} = \frac{1}{\alpha-\beta} \begin{bmatrix} 1-\beta & \alpha-1 \\ -\beta & \alpha \end{bmatrix} \begin{bmatrix} C_0^{-1} & 0 \\ 0 & C_1^{-1} \end{bmatrix},$$

and

$$\begin{aligned} \vec{X}' &= -\frac{1}{\alpha-\beta} \begin{bmatrix} 1-\beta & \alpha-1 \\ -\beta & \alpha \end{bmatrix} \begin{bmatrix} C_0^{-1} & 0 \\ 0 & C_1^{-1} \end{bmatrix} \begin{bmatrix} H(\alpha) \vec{U} + \vec{H}_0 \\ H(\beta) \vec{U} + \vec{H}_1 \end{bmatrix} \\ &= -\frac{1}{\alpha-\beta} \begin{bmatrix} (1-\beta) C_0^{-1} (H(\alpha) \vec{U} + \vec{H}_0) + (\alpha-1) C_1^{-1} (H(\beta) \vec{U} + \vec{H}_1) \\ -\beta C_0^{-1} (H(\alpha) \vec{U} + \vec{H}_0) + \alpha C_1^{-1} (H(\beta) \vec{U} + \vec{H}_1) \end{bmatrix}. \end{aligned}$$

Since $C_0^{-1} \vec{U} = C_1^{-1} \vec{U} = \vec{U}$, we have

$$\begin{aligned} (29) \quad \vec{X}' &= -\frac{1}{\alpha-\beta} \begin{bmatrix} (1-\beta)(H(\alpha) \vec{U} - \vec{X}_0) + (\alpha-1)(H(\beta) \vec{U} - \vec{X}_1) \\ -\beta (H(\alpha) \vec{U} - \vec{X}_0) + \alpha (H(\beta) \vec{U} - \vec{X}_1) \end{bmatrix} \\ &= -\frac{1}{\alpha-\beta} \begin{bmatrix} 1-\beta & \alpha-1 \\ -\beta & \alpha \end{bmatrix} \begin{bmatrix} H(\alpha) \vec{U} - \vec{X}_0 \\ H(\beta) \vec{U} - \vec{X}_1 \end{bmatrix}, \end{aligned}$$

where we have introduced the two-dimensional auxiliary vectors $\vec{X}_0$, $\vec{X}_1$ corresponding to the channels C_0 , C_1 , respectively, i.e., satisfying the equations $\vec{X}_0 = -C_0^{-1} H_0$ and $\vec{X}_1 = -C_1^{-1} H_1$. Then, if $\vec{X}$ is the auxiliary vector corresponding to the channel C , i.e. satisfying the equation

$$\vec{X} = \begin{bmatrix} x_0 \\ x_1 \end{bmatrix} = -C^{-1} \begin{bmatrix} H(\alpha) \\ H(\beta) \end{bmatrix},$$

it follows from (29) that

$$(30) \quad \vec{X}' = \begin{bmatrix} x_0 \\ x_0 \\ x_1 \\ x_1 \end{bmatrix} = \frac{1}{\alpha - \beta} \begin{bmatrix} 1 - \beta & \alpha - 1 \\ -\beta & \alpha \end{bmatrix} \begin{bmatrix} \vec{X}_0 \\ \vec{X}_1 \end{bmatrix}.$$

Eq. (30) expresses the four-dimensional auxiliary vector $\vec{X}'$ of the expanded 4×4 channel C' in terms of the two-dimensional auxiliary vectors $\vec{X}$, $\vec{X}_0$ and $\vec{X}_1$ of the binary channels C , C_0 and C_1 . Finally, the capacity of C' in bits/doublet is obtained from (30) by using Eq. (17). Thus, the calculation of $\vec{X}'$ and $c(C')$ is a simple matter, provided one has available a table of the values of the auxiliary vector $\vec{X}$ corresponding to the general binary channel. Such a table is given in Chang's paper [16], to which the reader is referred for further details.

The simple example just given, where isolated doublets are transmitted, illustrates the general approach to the problem of determining the capacity of channels with memory of the type under consideration. More generally, one can

consider the case of isolated groups of n equally spaced digits, and then the case of a channel driven at a uniform rate with no pauses for recovery from the effects of previously transmitted signals. (Of course, the latter case corresponds to passing to the limit $n \rightarrow \infty$ in the case of transmitting isolated groups of n equally spaced digits.) One can also consider $m \times m$ channels with memory, where $m > 2$. Such problems have been studied by Chang and co-workers [16], [17]. Finally, it is natural to study the case where the noise itself has appreciable memory or even the case where there is statistical dependence between the noise and the signals. It appears that much remains to be done along these lines.

References

- [1] Elias, P. - "Coding for two noisy channels", published in "Information Theory, Third London Symposium", C. Cherry, editor, Academic Press, New York, 1955. See p. 61
- [2] Shannon, C. E. - "The mathematical theory of communication", Bell System Tech. J., 27, 379-423, 623-656, 1948.
- [3] Khinchin, A. Y. - "Mathematical Foundations of Information Theory", translated by R. A. Silverman and M. D. Friedman, Dover, New York, 1958.
- [4] Faddeyev, D. K. - "On the notion of the entropy of a finite probability scheme", Uspekhi Matem. Nauk, 11, no. 1 (67), 227, 1956.
- [5] McMillan, B. - "The basic theorems of information theory", Ann. Math. Stat., 24, 196, 1953.
- [6] Feller, W. - "An Introduction to Probability Theory and its Applications", vol. 1, second edition, Wiley, New York, 1957. See Ch. 15.
- [7] Feinstein, A. - "Foundations of Information Theory", McGraw-Hill, New York, 1958. See p. 29.
- [8] Muroga, S. - "On the capacity of a discrete channel, I", J. Phys. Soc. Japan, vol. 8, no. 4, 484, 1953.
- [9] Shannon, C. E. - "Geometrische Deutung einiger Ergebnisse bei der Berechnung der Kanalkapazität", Nachrichtentechnische Zeitschrift, vol. 10, no. 1, 1, 1957.
- [10] Silverman, R. A. - "On binary channels and their cascades", I.R.E. Trans. Info. Th., Vol. IT-1, no. 3, 19, 1955.
- [11] Loeb, J. - "Les deux types d'erreurs dues au bruit", Annales des Télécommunications, vol. 9, no. 2, 1/6, 1954.
- [12] Shannon, C. E. - "Channels with side information at the transmitter", I.B.M. Journal, vol. 2, no. 4, 289, 1958.
- [13] Gantmakher, F. R. - "The Theory of Matrices", Vol. 1, translated by K. A. Hirsch, Chelsea, New York, 1959. See p. 101.
- [14] Shannon, C. E. - "A note on a partial ordering for communication channels", Information and Control, 1, 390, 1958.
- [15] Birnbaum, A. - "On the foundations of statistical inference", to be published.
- [16] Chang, S. H. - "Capacity of a certain asymmetrical binary channel with finite memory", I.R.E. Trans. Info. Th., vol. IT-4, no. 4, 152, 1958.
- [17] Chang, S. H.,
McHugh, P. G. and
Lob, W. H. - "Examples of capacity calculations of channels with memory", unpublished notes.

DISTRIBUTION LIST FOR RESEARCH REPORTS

Contract No. AF 19(604)5238

(ONE copy unless otherwise noted)

Commander Air Research and Development Command Andrews Air Force Base Washington 25, D. C. Attn: Major E. Wright, RDTCC	Director Evans Signal Laboratory Belmar, New Jersey Attn: Mr. O. C. Woodyard	(5) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CHRD
Director of Resident Training 3380th Technical Training Group Keesler Air Force Base, Mississippi Attn: OA-3011 Course	U. S. Army Signal Engineering Labs. Evans Signal Laboratory Belmar, New Jersey Attn: Technical Document Center	Director, Avionics Division (AV) Bureau of Aeronautics Department of the Navy Washington 25, D. C.
Director Air University Library Maxwell Air Force Base, Alabama	Massachusetts Institute of Technology Signal Corps Liaison Officer Cambridge 39, Mass. Attn: A. D. Bedrosian, Room 26-131	Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Mr. E. Johnston, Code R33E
Commander Air Force Missile Test Center Patrick Air Force Base, Florida Attn: MTE - for classified documents Attn: MU-411, Technical Library - for unclassified documents	Commanding General, SIGFM/EL-PC U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: Dr. Horst H. Kedesdy Deputy Chief, Chem-Physics Branch	Commander U. S. Naval Air Missile Test Center Point Mugu, California Attn: Code 366
Tactical Air Group Directorate of Research and Development DCS/D Headquarters, USAF Washington, D. C. Attn: Major R. L. Stell	Commander Army Rocket and Guided Missile Agency Redstone Arsenal, Alabama Attn: Technical Library, ORDXR-OTL	U. S. Naval Ordnance Lab. White Oak Silver Spring 17, Maryland Attn: The Library
Director, Communications and Electronics Hq. U. S. Air Force Washington 25, D. C. Attn: AFOAC S/E	Commanding General U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: SIGFM/EL-AT	Commander U. S. Naval Ordnance Test Station China Lake, California Attn: Code 753
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: WOLRS-6, Mr. Portune	Department of the Army Office of the Chief Signal Officer Washington 25, D. C. Attn: SIGRD-7	Librarian U. S. Naval Postgraduate School Monterey, California
Wright Air Development Center Wright-Patterson Air Force Base, Ohio Flight Research Laboratory Research Division Attn: WCRRA	Office of Chief Signal Officer Engineering and Technical Division Washington 25, D. C. Attn: SIGNET-5	Air Force Development Field Representative Naval Research Laboratory Washington 25, D. C. Attn: Code 1072
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: N. Draganjac, WCLNQ-4	Guided Missile Fuze Library Diamond Ordnance Fuze Laboratories Washington 25, D. C. Attn: R. D. Hatcher, Chief Microwave Development Section	Director U. S. Naval Research Laboratory Washington 25, D. C. Attn: Code 2027
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: Mr. Paul Springer, WCLRE-5	(10) Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia	Dr. J. I. Bohnert, Code 521C U. S. Naval Research Laboratory Washington 25, D. C. (Unclassified only) Classified to be sent to: Director U. S. Naval Research Laboratory Attn: Code 5200 Washington 25, D. C.
Commander Air Technical Intelligence Center Wright-Patterson Air Force Base, Ohio Attn: AFCIN-4B1a	(2) Library Boulder Laboratories National Bureau of Standards Boulder, Colorado	Commanding Officer and Director U. S. Navy Underwater Sound Laboratory Port Trumbull, New London, Connecticut
Commander Rome Air Development Center Griffiss Air Force Base, New York Attn: RCSSTL-1	National Bureau of Standards Department of Commerce Washington 25, D. C. Attn: Mr. A. G. McNish	Chief of Naval Research Department of the Navy Washington 25, D. C. Attn: Code 427
Commander Rome Air Development Center Griffiss Air Force Base, New York Attn: Mr. Donald Dakan, RCUE	National Bureau of Standards Department of Commerce Washington 25, D. C. Attn: Gustave Shapiro, Chief Engineering Electronics Section Electricity and Electronics Div.	Commanding Officer and Director U. S. Navy Electronics Laboratory (Library) San Diego 52, California
Commander Rome Air Development Center (ARDC) Griffiss Air Force Base, New York Attn: Dr. John S. Burgess, RCE	(2) Office of Technical Services Department of Commerce Washington 25, D. C. Attn: Technical Reports Section (Unclassified only)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Code Ad3
Commander Air Force Missile Development Center Holloman Air Force Base, New Mexico Attn: HDOIL, Technical Library	Director National Security Agency Washington 25, D. C. Attn: R/D (331)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Code ReSl-a
Director U. S. Army Ordnance Ballistic Research Laboratories Aberdeen Proving Ground, Maryland Attn: Ballistic Measurements Laboratory	(2) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CROTLR-2 - P. Condon	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Fire Control Branch (ReSk)
Ballistic Research Laboratories Aberdeen Proving Ground, Maryland Attn: Technical Information Branch	(5) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CROTLS - J. Armstrong	Department of the Navy Bureau of Aeronautics Technical Data Division, Code 4106 Washington 25, D. C.
		Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Code 817B

Commanding Officer
U. S. Naval Air Development Center
Johnsville, Pennsylvania
Attn: NADC Library

Commander
U. S. Naval Air Test Center
Patuxent River, Maryland
Attn: ET-315, Antenna Branch

Director
Naval Ordnance Laboratory
Corona, California

Commanding Officer
U. S. Naval Ordnance Laboratory
Corona, California
Attn: Mr. W. Horenstein, Division 72

Airborne Instruments Laboratory, Inc.
160 Old Country Road
Mineola, New York
Attn: Dr. E. G. Fubini, Director
Research and Engineering Division

Aircom, Inc.
354 Main Street
Winthrop, Mass.

American Machine and Foundry Company
Electronics Division
1085 Commonwealth Avenue
Boston 15, Mass.
Attn: Mrs. Rita Moravcsik, Librarian

Andrew Alford, Consulting Engineers
299 Atlantic Avenue
Boston 10, Mass.

Avion Division
ACF Industries, Inc.
800 No. Pitt Street
Alexandria, Virginia
Attn: Library

Battelle Memorial Institute
505 King Avenue
Attn: Wayne E. Rife, Project Leader
Electrical Engineering Division
Columbus 1, Ohio

Bell Aircraft Corporation
Post Office Box One
Buffalo 5, New York
Attn: Eunice P. Hazelton, Librarian

Bell Telephone Laboratories, Inc.
Whippany Laboratory
Whippany, New Jersey
Attn: Technical Information Library

Pacific Division
Bendix Aviation Corporation
11600 Sherman Way
North Hollywood, California
Engineering Library
Attn: Peggie Robinson, Librarian

Bendix Radio Division
Bendix Aviation Corp.
E. Joppa Road
Towson 4, Maryland
Attn: Dr. D. M. Allison, Jr.
Director Engineering and Research

Boeing Airplane Company
Pilotless Aircraft Division
P.O. Box 3707
Seattle 24, Washington
Attn: R.R. Barber, Library Supervisor

Boeing Airplane Company
Wichita Division Engineering Library
Wichita 1, Kansas
Attn: Kenneth C. Knight, Librarian

Boeing Airplane Company
Seattle Division
Seattle 14, Washington
Attn: E.T. Allen, Library Supervisor

Bjorksten Research Labs, Inc.
P. O. Box 265
Madison, Wisconsin
Attn: Mrs. Fern B. Korsgard

Convair, A Division of General Dynamics
Corp.
Fort Worth, Texas
Attn: K.G. Brown, Division Research
Librarian

Convair, A Division of General Dynamics
Corp.
San Diego 12, California
Attn: Mrs. Dora B. Burke,
Engineering Librarian

Cornell Aeronautical Laboratory, Inc.
4455 Genesee Street
Buffalo 21, New York
Attn: Librarian

Delmo Victor Company
A Division of Textron, Inc.
1515 Industrial Way
Belmont, California
Attn: Mary Ellen Addams,
Technical Librarian

Dorne and Margolin, Inc.
29 New York Avenue
Westbury, Long Island, N. Y.

Douglas Aircraft Company, Inc.
P.O. Box 200
Long Beach 1, California
Attn: Engineering Library (C-250)

Douglas Aircraft Co., Inc.
827 Lapham Street
El Segundo, California
Attn: Engineering Library

Douglas Aircraft Company, Inc.
3000 Ocean Park Boulevard
Santa Monica, California
Attn: P.T. Cline
Eq. Sec. Reference Files,
Eq. Eng. A250

Douglas Aircraft Company, Inc.
2900 North Memorial Drive
Tulsa, Oklahoma
Attn: Engineering Library, D-250

Electronics Communication, Inc.
1830 York Road
Timonium, Maryland

Emerson and Cuming, Inc.
869 Washington Street
Canton, Mass.
Attn: Mr. W. Cuming

Emerson Electric Mfg. Co.
8100 West Florissant Avenue
St. Louis 21, Missouri
Attn: Mr. E.R. Breslin, Librarian

Sylvania Elec. Prod. Inc.
Electronic Defense Laboratory
P.O. Box 205 - (Uncl)
Mountain View, California
Attn: Library

Fairchild Aircraft Division
Fairchild Eng. and Airplane Corp.
Hagerstown, Maryland
Attn: Library

Farnsworth Electronics Company
3700 East Pontiac Street
Fort Wayne 1, Indiana
Attn: Technical Library

Federal Telecommunication Labs.
500 Washington Avenue
Nutley 10, New Jersey
Attn: Technical Library

The Gabriel Electronics
Division of the Gabriel Company
135 Crescent Road
Needham Heights 94, Mass.
Attn: Mr. Steven Galagan

General Electric Advanced Electronics Center
Cornell University
Ithaca, New York
Attn: J. B. Travis

General Electric Company
Electronics Park
Syracuse, New York
Attn: Documents Library, B. Fletcher
Building 3-143A

General Precision Laboratory, Inc.
63 Bedford Road
Pleasantville, New York
Attn: Mrs. Mary G. Herbst, Librarian

Goodyear Aircraft Corp.
1210 Massillon Road
Akron 15, Ohio
Attn: Library D/120 Plant A

Granger Associates
Electronic Systems
966 Commercial Street
Palo Alto, California
Attn: John V. N. Granger, President

Grumman Aircraft Engineering Corporation
Bethpage, Long Island, N. Y.
Attn: Mrs. A. M. Gray, Librarian
Engineering Library, Plant No. 5

The Hallcrafters Company
4401 West 5th Avenue
Chicago 24, Illinois
Attn: LaVerne LaGiola, Librarian

Hoffman Laboratories, Inc.
3761 South Hill Street
Los Angeles 7, California
Attn: Engineering Library

Hughes Aircraft Company
Antenna Department
Microwave Laboratory
Building 12, Room 2617
Culver City, California
Attn: M. D. Adcock

Hughes Aircraft Company
Florence and Teale Streets
Culver City, California
Attn: Dr. L.G. Van Atta, Associate Director
Research Labs.

Hycon Eastern, Inc.
75 Cambridge Parkway
Cambridge, Mass.
Attn: Mrs. Lois Seulowitz
Technical Librarian

International Business Machines Corp.
Military Products Division
590 Madison Avenue
New York 33, New York
Attn: Mr. C.F. McElwain, General Manager

International Business Machines Corp.
Military Products Division
Owego, New York
Attn: Mr. D. I. Marr, Librarian
Department 459

International Resistance Company
401 N. Broad Street
Philadelphia 8, Pa.
Attn: Research Library

Jansky and Bailey, Inc.
1339 Wisconsin Avenue, N. W.
Washington 7, D. C.
Attn: Mr. Delmer C. Porta

Dr. Henry Jasik, Consulting Engineer
298 Shames Drive
Brush Hollow Industrial Park
Westbury, New York

Electromagnetic Research Corporation
711 14th Street, N. W.
Washington 5, D. C.

Lockheed Aircraft Corporation
2555 N. Hollywood Way
California Division Engineering Library
Department 72-75, Plant A-1, Bldg. 63-1
Burbank, California
Attn: N. C. Harnois

The Martin Company
P. O. Box 179
Denver 1, Colorado
Attn: Mr. Jack McCormick

The Glenn L. Martin Company
Baltimore 3, Maryland
Attn: Engineering Library
Antenna Design Group

Maryland Electronic Manufacturing Corp.
5009 Calvert Road
College Park, Maryland
Attn: Mr. H. Warren Cooper

Mathematical Reviews
190 Hope Street
Providence 6, Rhode Island

The W. L. Maxson Corporation
460 West 34th Street
New York, N. Y.
Attn: Miss Dorothy Clark

McDonnell Aircraft Corporation
Lambert Saint-Louis Municipal Airport
Box 516, St. Louis 3, Missouri
Attn: R. D. Detrich, Engineering Library

McMillan Laboratory, Inc.
Brownville Avenue
Ipswich, Massachusetts
Attn: Security Officer, Document Room

Melpar, Inc.
3000 Arlington Boulevard
Falls Church, Virginia
Attn: Engineering Technical Library

Microwave Development Laboratory
90 Broad Street
Baboon Park 57, Massachusetts
Attn: N. Tucker, General Manager

Microwave Radiation Company Inc.
19223 South Hamilton Street
Gardena, California
Attn: Mr. Morris J. Ehrlich, President

Chance Vought Aircraft, Inc.
9314 West Jefferson Street
Dallas, Texas
Attn: Mr. H. S. White, Librarian

Northrop Aircraft, Inc.
Hawthorne, California
Attn: Mr. E. A. Freitas, Library Dept 3145
1901 E. Broadway

Remington Rand Univ. - Division of Sperry
Rand Corporation
1900 West Allegheny Avenue
Philadelphia 29, Pennsylvania
Attn: Mr. John F. McCarthy
R and D Sales and Contracts

North American Aviation, Inc.
12214 Lakewood Boulevard
Downey, California
Attn: Engineering Library 495-115

North American Aviation, Inc.
Los Angeles International Airport
Los Angeles 45, California
Attn: Engineering Technical File

Page Communications Engineers, Inc.
710 Fourteenth Street, Northwest
Washington 5, D. C.
Attn: Librarian

Philco Corporation Research Division
Branch Library
4700 Wissachickon Avenue
Philadelphia 44, Pa.
Attn: Mrs. Dorothy S. Collins

Pickard and Burns, Inc.
240 Highland Avenue
Needham 94, Mass.
Attn: Dr. J. T. DeBettencourt

Polytechnic Research and Development
Company, Inc.
202 Tillary Street
Brooklyn 1, New York
Attn: Technical Library

Radiation Engineering Laboratory
Main Street
Maynard, Mass.
Attn: Dr. John Ruze

Radiation, Inc.
P. O. Drawer 37
Melbourne, Florida
Attn: Technical Library, Mr. M.L. Cox

Radio Corp. of America
RCA Laboratories
Rocky Point, New York
Attn: P. S. Carter, Lab. Library

RCA Laboratories
David Sarnoff Research Center
Princeton, New Jersey
Attn: Miss Fern Cloak, Librarian
Research Library

Radio Corporation of America
Defense Electronic Products
Building 10, Floor 7
Camden 2, New Jersey
Attn: Mr. Harold J. Schrader
Staff Engineer, Organization
of Chief Technical
Administrator

(2) The Ramo-Wooldridge Corporation
P.O. Box 45453 Airport Station
Los Angeles 45, California
Attn: Margaret C. Whitnah,
Chief Librarian

Hoover Microwave Co.
9592 Baltimore Avenue
College Park, Maryland

Director, USAF Project RAND
Via: Air Force Liaison Office
The Rand Corporation
1700 Main Street
Santa Monica, California

Rantec Corporation
Calabasas, California
Attn: Grace Keener, Office Manager

Raytheon Manufacturing Company
Missile Systems Division
Bedford, Mass.
Attn: Mr. Irving Goldstein

Raytheon Manufacturing Company
Wayland Laboratory, State Road
Wayland, Mass.
Attn: Mr. Robert Borts

Raytheon Manufacturing Company
Wayland Laboratory
Wayland, Mass.
Attn: Miss Alice G. Anderson,
Librarian

Republic Aviation Corporation
Farmingdale, Long Island, N. Y.
Attn: Engineering Library

Thru: Air Force Plant Representative
Republic Aviation Corp.
Farmingdale, Long Island, N.Y.

Rheem Manufacturing Company
9236 East Hall Road
Downey, California
Attn: J. C. Joerger

Trans-Tech, Inc.
P. O. Box 346
Frederick, Maryland

Ryan Aeronautical Company
Lindbergh Field
San Diego 12, California
Attn: Library - unclassified

Sage Laboratories
159 Linden Street
Wellesley 81, Mass.

Sanders Associates
95 Canal Street
Nashua, New Hampshire
Attn: N. R. Wild, Librarian

Sandia Corporation, Sandia Base
P.O. Box 5800, Albuquerque, New Mexico
Attn: Classified Document Division

Sperry Gyroscope Company
Great Neck, Long Island, New York
Attn: Florence W. Turnbull, Engr. Librarian

Stanford Research Institute
Menlo Park, California
Attn: Library, Engineering Division

Sylvania Electric Products, Inc.
100 First Avenue
Waltham 54, Mass.
Attn: Charles A. Thornhill, Report Librarian
Waltham Laboratories Library

Systems Laboratories Corporation
14852 Ventura Boulevard
Sherman Oaks, California
Attn: Donald L. Margerum

TRG, Inc.
17 Union Square West
New York 3, N. Y.
Attn: M. L. Henderson, Librarian

A. S. Thomas, Inc.
161 Devonshire Street
Boston 10, Mass.
Attn: A. S. Thomas, President

Bell Telephone Laboratories
Murray Hill
New Jersey

Chu Associates
P. O. Box 387
Whitcomb Avenue
Littleton, Mass.

Microwave Associates, Inc.
Burlington, Mass.

Raytheon Manufacturing Company
Missile Division
Hartwell Road
Bedford, Mass.

Radio Corporation of America
Aviation Systems Laboratory
225 Crescent Street
Waltham, Mass.

Lockheed Aircraft Corporation
Missile Systems Division Research Library
Box 504, Sunnyvale, California
Attn: Miss Eva Lou Robertson,
Chief Librarian

The Rand Corporation
1700 Main Street
Santa Monica, California
Attn: Dr. W. C. Hoffman

Commander
AF Office of Scientific Research
Air Research and Development Command
14th Street and Constitution Avenue
Washington, D. C.
Attn: Mr. Otting, SRY

Westinghouse Electric Corp.
Electronics Division
Friendship Int'l Airport Box 746
Baltimore 3, Maryland
Attn: Engineering Library

Wheeler Laboratories, Inc.
122 Cutter Mill Road
Great Neck, New York
Attn: Mr. Harold A. Wheeler

Zenith Plastics Co.
Box 91
Gardena, California
Attn: Mr. S. S. Oleesky

Library Geophysical Institute
of the University of Alaska
College
Alaska

University of California
Berkeley 4, California
Attn: Dr. Samuel Silver,
Prof. Engineering Science
Division of Elec. Eng. Electronics
Research Lab.

University of California
Electronics Research Lab.
332 Cory Hall
Berkeley 4, California
Attn: J. R. Whimery

California Institute of Technology
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, California
Attn: Mr. I. E. Newlan

California Institute of Technology
1201 E. California Street
Pasadena, California
Attn: Dr. C. Papas

Carnegie Institute of Technology,
Schenley Park
Pittsburgh 13, Pennsylvania
Attn: Prof. A. E. Heins

Cornell University
School of Electrical Engineering
Ithaca, New York
Attn: Prof. G. C. Dalman

University of Florida
Department of Electrical Engineering
Gainesville, Florida
Attn: Prof. M. H. Latour, Library

Library
Georgia Institute of Technology
Engineering Experiment Station
Atlanta, Georgia
Attn: Mrs. J.H. Crosland, Librarian

Harvard University
Technical Reports Collection
Gordon McKay Library, 303A Pierce Hall
Oxford Street, Cambridge 38, Mass.
Attn: Mrs. E.L. Hufschmidt, Librarian

Harvard College Observatory
60 Garden Street
Cambridge 39, Mass.
Attn: Dr. Fred L. Whipple

University of Illinois
Documents Division Library
Urbana, Illinois

University of Illinois
College of Engineering
Urbana, Illinois
Attn: Dr. P. E. Moyes, Department of
Electrical Engineering

The Johns Hopkins University
Homewood Campus
Department of Physics
Baltimore 18, Maryland
Attn: Dr. Donald E. Kerr

Sandia Corporation
Attn: Organization 1h23
Sandia Base
Albuquerque, New Mexico

Applied Physics Laboratory
The Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
Attn: Mr. George L. Seielstad

Massachusetts Institute of Technology
Research Laboratory of Electronics
Room 20B-221
Cambridge 39, Massachusetts
Attn: John K. Hewitt

Massachusetts Institute of Technology
Lincoln Laboratory
P. O. Box 73
Lexington 73, Mass.
Attn: Document Room A-229

University of Michigan
Electronic Defense Group
Engineering Research Institute
Ann Arbor, Michigan
Attn: J. A. Boyd, Supervisor

University of Michigan
Engineering Research Institute
Radiation Laboratory
Attn: Prof. K. M. Siegel
912 N. Main St.,
Ann Arbor, Michigan

University of Michigan
Engineering Research Institute
Willow Run Laboratories
Willow Run Airport
Ypsilanti, Michigan
Attn: Librarian

University of Minnesota
Minneapolis 14, Minnesota
Attn: Mr. Robert H. Stumm, Library

Northwestern University
Microwave Laboratories
Evanston, Illinois
Attn: R. E. Beam

Ohio State University Research Found.
Ohio State University
Columbus 10, Ohio
Attn: Dr. T.E. Tice
Dept. of Elec. Engineering

The University of Oklahoma
Research Institute
Norman, Oklahoma
Attn: Prof. C. L. Farrar, Chairman
Electrical Engineering

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn, New York
Attn: Dr. Arthur A. Oliner

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn, New York
Attn: Mr. A. E. Laemmel

Syracuse University Research Institute
Cottendale Campus
Syracuse 10, New York
Attn: Dr. C. S. Grove, Jr.
Director of Engineering Research

The University of Texas
Elec. Engineering Research Laboratory
P. O. Box 8026, University Station
Austin 12, Texas
Attn: Mr. John R. Gerhardt
Assistant Director

The University of Texas
Defense Research Laboratory
Austin, Texas
Attn: Claude W. Horton, Physics Library

University of Toronto
Department of Electrical Engineering
Toronto, Canada
Attn: Prof. G. Sinclair

Lowell Technological Institute
Research Foundation
P. O. Box 709, Lowell, Mass.
Attn: Dr. Charles R. Mingins

University of Washington
Department of Electrical Engineering
Seattle 5, Washington
Attn: G. Heid, Associate Professor

Stanford University
Stanford, California
Attn: Dr. Chodorow
Microwave Laboratory

Physical Science Laboratory
New Mexico College of Agriculture
and Mechanic Arts
State College, New Mexico
Attn: Mr. H. W. Hass

Brown University
Department of Electrical Engineering
Providence, Rhode Island
Attn: Dr. C. M. Angulo

Case Institute of Technology
Cleveland, Ohio
Attn: Prof. S. Seeley

Columbia University
Department of Electrical Engineering
Morningside Heights
New York, N. Y.
Attn: Dr. Schlesinger

McGill University
Montreal, Canada
Attn: Prof. G. A. Wootton
Director, The Eaton Electronics
Research Lab.

Purdue University
Department of Electrical Engineering
Lafayette, Indiana
Attn: Dr. Schultz

The Pennsylvania State University
Department of Electrical Engineering
University Park, Pennsylvania

University of Pennsylvania
Institute of Cooperative Research
3400 Walnut Street
Philadelphia, Pennsylvania
Attn: Dept. of Electrical Engineering

University of Tennessee
Ferris Hall
W. Cumberland Avenue
Knoxville 16, Tennessee

University of Wisconsin
Department of Electrical Engineering
Madison, Wisconsin
Attn: Dr. Scheibe

University of Seattle
Department of Electrical Engineering
Seattle, Washington
Attn: Dr. D. K. Reynolds

Wayne University
Detroit, Michigan
Attn: Prof. A. F. Stevenson

Electronics Research Laboratory
Illinois Institute of Technology
3300 So. Federal Street
Chicago 16, Illinois
Attn: Dr. Lester C. Peach
Research Engineer

Advisory Group on Electronic Parts
Room 103
Moore School Building
200 South 33rd Street
Philadelphia 4, Pennsylvania

Ionosphere Research Laboratory
Pennsylvania State College
State College, Pennsylvania
ATTN: Professor A. H. Waynick, Director

Institute of Mathematical Sciences
25 Waverly Place
New York 3, New York
ATTN: Librarian

Electronics Division
Rand Corporation
1700 Main Street
Santa Monica, California
ATTN: Dr. Robert Kalaba

National Bureau of Standards
Washington, D. C.
ATTN: Dr. W. K. Saunders

Applied Mathematics and Statistics Lab.
Stanford University
Stanford, California
ATTN: Dr. Albert H. Bowker

Department of Physics and Astronomy
Michigan State College
East Lansing, Michigan
ATTN: Dr. A. Leitner

University of Tennessee
Knoxville, Tennessee
ATTN: Dr. Fred A. Picken

Lebanon Valley College
Annville, Pennsylvania
ATTN: Professor B.H. Bissinger

General Atomic
P. O. Box 608
San Diego 12, California
Attn: Dr. Edward Gerjuoy

Department of Physics
Amherst College
Amherst, Mass.
ATTN: Dr. Arnold Arons

California Institute of Technology
1201 E. California Street
Pasadena, California
ATTN: Dr. A. Erdelyi

Mathematics Department
Stanford University
Stanford, California
ATTN: Dr. Harold Levine

University of Minnesota
Minneapolis 14, Minnesota
ATTN: Professor Paul C. Rosenbloom

Department of Mathematics
Stanford University
Stanford, California
ATTN: Professor Bernard Epstein

Applied Physics Laboratory
The Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
ATTN: Dr. B. S. Gourary

(2) Exchange and Gift Division
The Library of Congress
Washington 25, D. C.

Electrical Engineering Department
Massachusetts Institute of Technology
Cambridge 39, Mass.
ATTN: Dr. L. J. Chu

Nuclear Development Associates, Inc.
5 New Street
White Plains, New York
ATTN: Library

California Institute of Technology
Electrical Engineering
Pasadena, California
ATTN: Dr. Zohrab A. Kaprielian

Dr. Rodman Doll
311 W. Cross Street
Ypsilanti, Michigan

California Inst. of Technology
Pasadena, California
ATTN: Mr. Calvin Wilcox

(3) Mr. Robert Brookhurst
Woods Hole Oceanographic Institute
Woods Hole, Mass.

National Bureau of Standards
Boulder, Colorado
ATTN: Dr. R. Gallet

Dr. Solomon L. Schwebel
3689 Louis Road
Palo Alto, California

University of Minnesota
The University of Library
Minneapolis 14, Minnesota
ATTN: Exchange Division

Department of Mathematics
University of California
Berkeley, California
ATTN: Professor Bernard Friedman

Lincoln Laboratory
Massachusetts Institute of Technology
P. O. Box 73
Lexington 73, Massachusetts
ATTN: Dr. Shou Chin Wang, Room C-351

Melpar, Inc.,
3000 Arlington Boulevard
Falls Church, Virginia
ATTN: Mr. K. S. Kelleher, Section Head

Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
ATTN: Mr. Francis J. Zucker, CRRD

Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
ATTN: Dr. Philip Newman, CRRK

Mr. N. C. Gerson
Trapelo Road
South Lincoln, Mass.

Dr. Richard B. Barrar
Systems Development Corp.
2400 Colorado Avenue
Santa Monica, California

Columbia University Hudson Laboratories
P.O. Box 239
145 Palisade Street, Dobbs Ferry, N. Y.
ATTN: Dr. N. W. Johnson

Institute of Fluid Dynamics
and Applied Mathematics
University of Maryland
College Park, Maryland
ATTN: Dr. Elliott Montroll

Department of Electrical Engineering
Washington University
Saint Louis 5, Mo.
ATTN: Professor J. Van Bladel

Department of the Navy
Office of Naval Research Branch Office
1030 E. Green Street
Pasadena 1, California

Brandeis University
Waltham, Mass.
ATTN: Library

General Electric Company
Microwave Laboratory
Electronics Division
Stanford Industrial Park
Palo Alto, California
ATTN: Library

Smyth Research Associates
3555 Aero Court
San Diego 3, California
ATTN: Dr. John B. Smyth

Electrical Engineering
California Institute of Technology
Pasadena, California
ATTN: Dr. Georges G. Weill

Naval Research Laboratory
Washington 25, D. C.
ATTN: Henry J. Passerini, Code 5278A

Dr. George Kear
5 Culver Court
Orinda, California

Brooklyn Polytechnic
85 Livingston Street
Brooklyn, New York
ATTN: Dr. Nathan Marcovitz

Department of Electrical Engineering
Brooklyn Polytechnic
85 Livingston Street
Brooklyn, New York
ATTN: Dr. Jerry Shmoys

Department of Mathematics
University of New Mexico
Albuquerque, New Mexico
ATTN: Dr. I. Kolodner

Mathematics Department
Polytechnic Institute of Brooklyn
Johnson and Jay Street
Brooklyn, New York
ATTN: Dr. Harry Hochstadt

Ballistics Research Laboratory
Aberdeen Proving Grounds
Aberdeen, Maryland
ATTN: Dr. Pullen Keats

Dr. Lester Kraus
4935 Whitehaven Way
San Diego, California

University of Minnesota
Institute of Technology
Minneapolis, Minnesota
Attn: Dean Athelston Spilhaus

Ohio State University
Columbus, Ohio
Attn: Prof. C. T. Tai
Department of Electrical Eng.

Naval Research Laboratories
Washington 25, D. C.
Attn: W. S. Ament, Code 5271

Naval Research Laboratory
Washington 25, D. C.
Attn: Dr. Leslie G. McCracken, Jr.
Code 3933A

Office of Naval Research
Department of the Navy
Attn: Geophysics Branch, Code 416
Washington 25, D. C.

Office of Chief Signal Officer
Signal Plans and Operations Division
Attn: SIGOL-2, Room 20
Com. Liaison Br., Radio Prop. Sect.
The Pentagon, Washington 25, D. C.

Defence Research Member
Canadian Joint Staff
2001 Connecticut Street
Washington, D. C.

Central Radio Prop. Lab.
National Bureau of Standards
Attn: Technical Reports Library
Boulder, Colorado

U. S. Weather Bureau
U. S. Department of Commerce
Washington 25, D. C.
Attn: Dr. Harry Wexler

Federal Communications Commission
Washington 25, D. C.
Attn: Mrs. Barbara C. Grimes, Librarian

Upper Atmosphere Research Section
Central Radio Propagation Laboratory
National Bureau of Standards
Boulder, Colorado

Argonne National Laboratory
P.O. Box 299
Lemont, Illinois
Attn: Dr. Hoylande D. Young

Bell Telephone Labs.
Murray Hill, New Jersey
Attn: Dr. S. O. Rice, 3B - 203

Carnegie Institute of Washington
Dept. of Terrestrial Magnetism
5241 Broad Branch Road, N. W.
Washington 15, D. C.
Attn: Library

Georgia Tech Research Institute
225 N. Avenue, N. W.
Attn: Dr. James E. Boyd
Atlanta, Georgia

University of Maryland
College Park, Maryland
Attn: Dr. A. Weinstein
Institute of Fluid Dynamics

Massachusetts Institute of Technology
Lincoln Laboratory
P. O. Box 73
Lexington 73, Massachusetts
Attn: Prof. Radford, Division 3 Head

Willow Run Research Center
University of Michigan
Willow Run Airport
Ypsilanti, Michigan
Attn: Dr. C. L. Dolph

School of Engineering
New York University
University Heights
New York, New York

Shell Fellowship Committee of the
Shell Companies Foundation, Inc.
50 West 50th Street
New York 20, N. Y.
Attn: Mr. J. R. Janssen

Esso Research and Engineering Co.
P. O. Box 51
Linden, New Jersey
Attn: Mr. C. L. Brown, Manager

Union Carbide and Carbon Corp.
30 E. 42nd Street
New York 17, New York
Attn: Mr. L. E. Erlanson

Convair
San Diego 12, California
Attn: Mr. Marvin Stern

Bell Telephone Labs., Inc.
463 West Street
New York 13, N. Y.
Attn: Dr. Mervin J. Kelly

Engineering Library
University of California
405 Hilgard Avenue
Los Angeles 24, California

Convair, A Division of General Dynamics Corp.
Daingerfield, Texas
Attn: J. E. Arnold, Division Manager

Convair, A Division of General Dynamics Corp.
San Diego 12, California
Attn: R. L. Bayless, Chief Engineer

Convair, a Division of General Dynamics Corp.
San Diego 12, California
Attn: K. J. Bossart, Chief Engineer-WS107A

Convair, A Div. of General Dynamics
Corp.
Fort Worth 1, Texas
Attn: F. W. Davis, Chief Engineer

Convair, A Div. of General Dynamics
Corp.
Pomona, California
Attn: C. D. Perrine
Ass't Div. Manager, Engin.

Shell Development Company
Exploration and Production Res. Div.
3737 Bellaire Boulevard
Houston 25, Texas
Attn: Miss Aphrodite Mamoulides

RCA Laboratories
Princeton, New Jersey
Attn: Dr. Charles Polk

Stanford Research Institute
S. Pasadena, California
Attn: Dr. J. Brandstatten

Wayne State University
Kresge-Hooker Science Library
5250 Second Boulevard
Detroit 2, Michigan

ARRA
1 Bond Street
Westbury, L. I., New York
Attn: Dr. Norman Spector

Varian Associates
611 Hansen Way
Palo Alto, California
Attn: Mrs. Perry Conway
Technical Librarian

Case Institute of Technology
Department of Electrical Engin.
University Circle
Cleveland 6, Ohio
Attn: Prof. Robert Plonsey

Dr. Ming S. Wong, CRKP
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

Physics Section
AVCO-RAD Division
20 South Union Street
Lawrence, Mass.
Attn: Dr. Ernest Bauer

Advanced Development Section
Western Development Labs.
Philco Corp.
3875 Fabian Way
Palo Alto, California
Attn: Dr. Albert R. Giddis

Department of Aeronautical Engineering
University of Michigan
Ann Arbor, Michigan
Attn: Prof. Mahinder Uberoi

Gordon McKay Laboratory
Harvard University
Cambridge 39, Mass.
Attn: Dr. S. R. Seshadri

Commander
Air Research and Development Command
Attn: RDTR
Andrews Air Force Base
Washington 25, D. C.

College of Engineering
Dept. of Electrical Engineering
University of Florida
Gainesville, Florida
Attn: Dr. Sullivan

Dr. V. M. Papadopoulos
Dept. of Engineering
Brown University
Providence, R. I.

Major Vernon Lee Dawson
RSDD-CML(MO)
Redstone Arsenal
Huntsville, Alabama

Grumman Aircraft Engineering Corp.
South Oyster Bay Road
Bethpage, Long Island, N. Y.
Attn: Dr. Charles Mack

AF Office of Scientific Research
Washington 25, D. C.
Attn: Dr. Karl Kaplan

University of California
Radiation Laboratory
P. O. Box 808
Livermore, California
Attn: Dr. Bernard A. Lippmann

Department of Electrical Engineering
Case Institute of Technology
University Circle
Cleveland 6, Ohio
Attn: Professor Albert E. Collin

Antenna Laboratory
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts
Attn: Mr. Philip Blackstone

Lt. Mark J. Beran, CRRD
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts
Mr. Richard Mack, CRRD
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

System Development Corporation
2500 Colorado Avenue
Santa Monica, California
Attn: Library