



ADA103144

ADL-TR-1942

June 1981

FORTRAN A Computer Program for Designing and
Implementing Recursive Digital Filters

by Donald F. Gray
David R. Gambrel

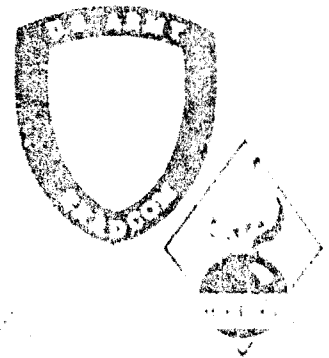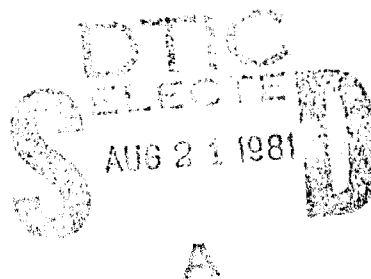

U.S. Army Electronics Research
and Development Command
Harry Diamond Laboratories

Adelphi, MD 20783

Approved for public release; distribution unlimited


81 8 20 194

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturers' or trade names does not constitute an official indorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

DISCLAIMER NOTICE

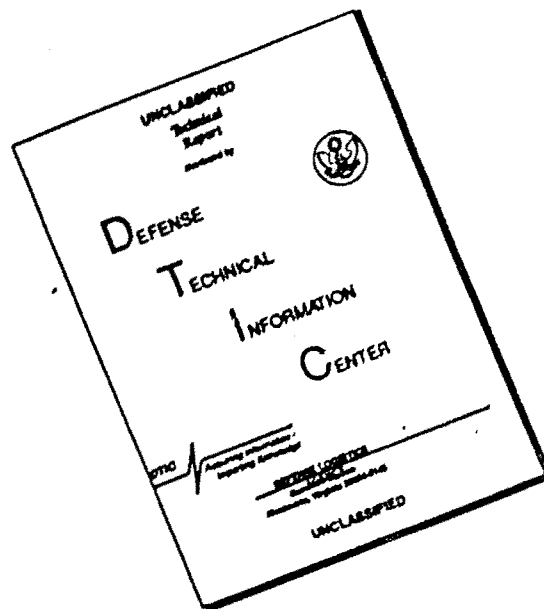

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER HDL-TR-1942	2. GOVT ACCESSION NO. AD-A103144	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) A FORTRAN IV Computer Program for Designing and Implementing Recursive Digital Filters		5. TYPE OF REPORT & PERIOD COVERED Technical Report
7. AUTHOR(s) Robert F. Gray David R. Gambrel (IBM Corp.)		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Harry Diamond Laboratories 2800 Powder Mill Road Adelphi, MD 20783		8. CONTRACT OR GRANT NUMBER(s) DA: 1L162120AH25
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Materiel Development and Readiness Command Alexandria, VA 22333		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Ele: 6.21.20.A
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE June 1981
		13. NUMBER OF PAGES 70
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES DRCMS Code: 612120.H.250011 HDL Proj: X750E3		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Recursive digital filter Butterworth digital filter Filter design Chebyshev digital filter Bilinear transformation Elliptic digital filter		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A FORTRAN IV computer program has been developed that will design and implement recursive digital filters. Standard low pass analog designs are used in combination with the bilinear transform to design the filters. The analog designs used are Butterworth (maximally flat), Chebyshev (equiripple in the pass-band), and elliptic (equiripple in both passband and stop band). Transformations are possible in the z domain to obtain high-pass,		

UNCLASSIFIED

1 SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. Abstract (Cont'd)

band-pass, and band-stop filters from the low-pass designs. The development of the computer program is detailed along with all the necessary equations. A complete listing of the code also is provided.

UNCLASSIFIED

2 SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

FOREWORD

This report resulted from a joint project assigned to the authors for a course on digital signal processing offered at the George Washington University, Washington, DC. The authors thank Professor N. Kyriakopoulos for his guidance during the project.

A

CONTENTS

	<u>Page</u>
FOREWORD	3
1. INTRODUCTION	7
2. APPROACH	7
2.1 Invariant-Impulse-Response Method	8
2.2 Matched z Transformation	8
2.3 Bilinear Transformation	9
2.4 Analog Filter Designs	11
2.4.1 Butterworth	11
2.4.2 Chebyshev	12
2.4.3 Elliptic	12
2.5 Digital Filter Realization	13
2.6 Band Transformations	13
3. FORTRAN IV PROGRAM	14
3.1 Outline	14
3.1.1 RDATA	14
3.1.2 WARP	16
3.1.3 FACTOR	16
3.1.4 FPLOT	17
3.1.5 Filter Choice	17
3.1.6 FILIMP	17
3.1.7 PDATA	18
3.2 Program Use	18
4. DESIGN EXAMPLES	24
4.1 Analog Design	24
4.2 Band Transformations	24
4.3 Data Processing	29
5. CONCLUSIONS AND RECOMMENDATIONS	32
LITERATURE CITED	33
SELECTED BIBLIOGRAPHY	34
DISTRIBUTION	65

CONTENTS (Cont'd)

Page

APPENDICES

A.--EQUATIONS USED FOR CODE DEVELOPMENT	35
B.--FORTRAN IV COMPUTER PROGRAM FOR RECURSIVE DIGITAL FILTERS	49

FIGURES

1 Bilinear transformation	10
2 Recursive digital filter in parallel form	13
3 Recursive digital filter program	15
4 Input data for example 1	21
5 Output data for example 1	21
6 Low-pass Cauer filter: amplitude versus frequency	22
7 Low-pass Cauer filter: phase versus frequency	22
8 Band-pass Cauer filter: amplitude versus frequency	23
9 Band-pass Cauer filter: phase versus frequency	23
10 Low-pass Butterworth filter: amplitude versus frequency	25
11 Low-pass Butterworth filter: phase versus frequency	25
12 Low-pass Chebyshev filter: amplitude versus frequency	26
13 Low-pass Chebyshev filter: phase versus frequency	26
14 High-pass Butterworth filter: amplitude versus frequency	27
15 High-pass Butterworth filter: phase versus frequency	27
16 Band-stop Chebyshev filter: amplitude versus frequency	28
17 Band-stop Chebyshev filter: phase versus frequency	28
18 Input waveform obtained by summing three sinusoids	29
19 Output waveform obtained by using low-pass Butterworth filter	30
20 Output waveform obtained by using high-pass Butterworth filter	30
21 Output waveform obtained by using band-pass Cauer filter	31
22 Output waveform obtained by using band-stop Chebyshev filter	31

1. INTRODUCTION

The purpose of this project is to develop a computer program that will design and implement a recursive digital filter to meet user specifications given as inputs to the program. The filter type is selected from three well-known analog filter approximations: (1) Butterworth, maximally flat; (2) Chebyshev, equiripple in the passband; and (3) elliptic (or Cauer), equiripple in both the passband and the stop band. For a low-pass filter, for example, the user specifies the filter type, the filter order, the cutoff frequency, and the sampling rate. High-pass, band-pass, and band-stop filters also may be chosen for design.

The program calculates the poles and the zeros of the low-pass filter in the analog s domain. The bilinear transformation technique is then used to determine the coefficients of the transfer function in the z domain. If a high-pass, band-pass, or band-stop filter is required, then the coefficients are determined by a transformation in the z domain of the prototype low-pass digital filter whose coefficients have been determined from an analog low-pass filter using the bilinear transformation.

After determining the coefficients of the digital filter transfer function, a plot of the magnitude and the phase may be obtained if desired by the user. A list of the coefficients also is printed. Another option is to implement the filter as a system of linear difference equations and to process input data consisting of sample values at any given sample rate through the filter. The filtered output data points are then printed as output.

In summary, the program performs the following:

- a. Calculates and prints the coefficients of the desired digital filter.
- b. Plots the magnitude and phase responses.
- c. Implements the digital filter and processes data through the filter.
- d. Outputs the filtered data.

2. APPROACH

There are two general types of digital filters, recursive and non-recursive. The output response of a nonrecursive filter is a function

of only the present and past values of the input excitation. A recursive filter is one in which the present output response is a function of the present and past values of the input, as well as past values of the output.

As in analog filters, the approximation step in the design of digital filters is the process whereby a realizable transfer function satisfying prescribed specifications is obtained. To be realizable as a recursive filter, a transfer function must satisfy the following constraints.

- a. It must be a rational function of z with real coefficients.
- b. Its poles must lie within the unit circle of the z plane.
- c. The degree of the numerator polynomial must be equal to or less than that of the denominator polynomial.

Recursive filter approximations can be obtained from analog filter approximations by using the following methods, all of which satisfy the above constraints:

Invariant-impulse-response method
Matched z transformation
Bilinear transformation

Each method has certain advantages and disadvantages.

2.1 Invariant-Impulse-Response Method

Given an analog filter transfer function, $H_A(s)$, the invariant-impulse-response method is implemented as follows:

- a. Obtain the impulse response of analog filter $H_A(t)$.
- b. Replace t by nT in $H_A(t)$.
- c. Form the z transform of $H_A(nT)$. This gives $H_D(z)$, the digital filter transfer function. T is the sample period $= 1/f_s$.

This method gives good results if $H_A(j\omega) \approx 0$ for $\omega > \omega_s/2$. However, aliasing errors tend to restrict this method to the design of all pole filters.

2.2 Matched z Transformation

Given continuous-time transfer function

$$H_A(s) = \frac{H_0 \prod_{i=1}^M (s - s_i)}{\prod_{i=1}^N (s - p_i)},$$

a corresponding digital transfer function can be formed as

$$H_D(z) = (z + 1)^L \frac{H_0 \prod_{i=1}^M (z - e^{s_i T})}{\prod_{i=1}^N (z - e^{p_i T})},$$

where L is an integer equal to the number of zeros at $s = \infty$ in $H_A(s)$. This method gives reasonable results for high-pass and band-stop filters, although it tends to distort the passband ripple in Chebyshev and elliptic filters. For low-pass and band-pass filters, better approximations can be obtained by using the modified invariant-impulse-response method.¹

2.3 Bilinear Transformation

The bilinear transformation method yields a digital filter with approximately the same time-domain response as the original analog filter for any excitation.

$$H_D(z) = H_A(s) \bigg|_{s = \frac{2}{T} \frac{z - 1}{z + 1}}$$


The bilinear transformation maps these:

- a. The open right-half s plane onto the region exterior to the unit circle $|z| = 1$ of the z plane
- b. The j axis of the s plane onto the unit circle $|z| = 1$
- c. The open left-half s plane onto the interior of the unit circle

From property c it follows that a stable analog filter yields a stable digital filter and, since the transformation has real coefficients, $H_D(z)$ has real coefficients.

¹A. Antoniou, *Digital Filters: Analysis and Design*, McGraw-Hill Book Co., Inc., New York (1979).

Digital filters obtained by the bilinear transformation do not suffer from the effects of aliasing. However, a nonlinear frequency distortion is introduced because the transformation maps the entire $j\omega$ axis onto the unit circle (fig. 1).

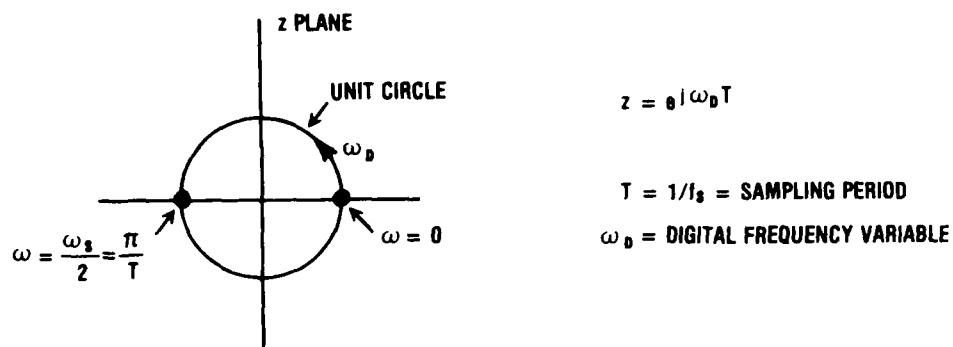

THE ANALOG FREQUENCY VARIABLE, ω_A , IS RELATED TO THE DIGITAL FREQUENCY VARIABLE, ω_D , THROUGH THE BILINEAR TRANSFORMATION:

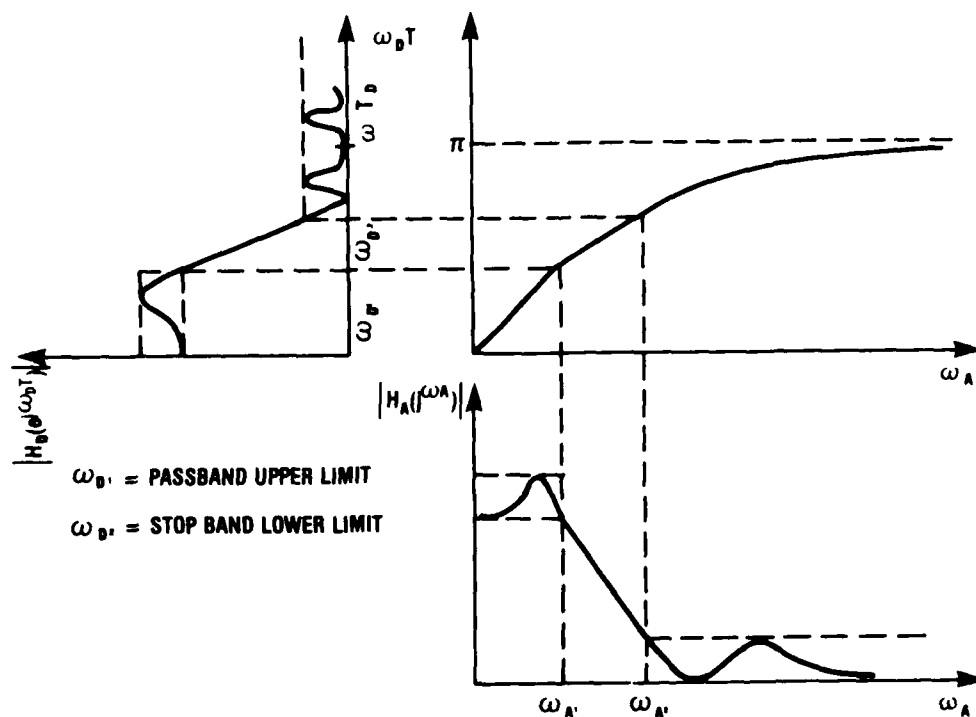


Figure 1. Bilinear transformation.

If only the amplitude response is of concern, the warping effect can for all practical purposes be eliminated by prewarping the analog filter. For example, if a low-pass cutoff frequency of ω_{DC} is desired for the digital filter, then the analog filter is first designed for an unnormalized cutoff frequency given by

$$\omega_{AC} = \frac{2}{T} \tan \left(\frac{\omega_{DC} T}{2} \right).$$

The phase response of the derived digital filter is nonlinear because of the warping effect. Furthermore, little can be done to linearize it except by employing delay equalization. Consequently, if it is mandatory to preserve a linear phase response, alternative methods should be considered.

The bilinear transformation is the most important of the techniques used to obtain digital recursive filters from analog filters. The passband and loss characteristics of the analog filter are preserved, and there is no aliasing effect. Frequency distortion is compensated at ω_{DC} , and the transfer function can be obtained by a relatively easy transformation. For these reasons, the bilinear transformation was chosen as the method of obtaining the digital filter transfer function for this project.

2.4 Analog Filter Designs

The theory of analog filter approximations has been extensively developed.¹⁻⁴

2.4.1 Butterworth

The Butterworth approximation is the simplest all-pole type. In the stop band, the attenuation characteristics monotonically decrease as a function of frequency. The Butterworth filter is termed also a maximally flat magnitude approximation in that the error in the passband is also a monotonically decreasing function. The equations for calculating the pole locations are given in appendix A.

¹A. Antoniou, *Digital Filters: Analysis and Design*, McGraw-Hill Book Co., Inc., New York (1979).

²M. S. Ghausi, *Principles and Design of Linear Active Circuits*, McGraw-Hill Book Co., Inc., New York (1965), ch. 4.

³H. Y.-F. Lam, *Analog and Digital Filters*, Prentice-Hall, Inc., Englewood Cliffs, NJ (1979).

⁴D. E. Johnson, *Introduction to Filter Theory*, Prentice-Hall, Inc., Englewood Cliffs, NJ (1976).

2.4.2 Chebyshev

A second approximation that improves on the rate of change of the attenuation between passband and stop band over that of the Butterworth filter is the Chebyshev filter. The error in the passband is distributed evenly in an oscillating manner. This is called an equiripple approximation. In the stop band, the magnitude decreases monotonically with a faster cutoff rate than that of a Butterworth filter of the same order. The Chebyshev filter is an all-pole type and is based on the n th-order Chebyshev polynomials, $C_n(\omega)$.

$$C_n(\omega) = \begin{cases} \cos(n \cos^{-1} \omega), & 0 \leq \omega \leq 1, \\ \cosh(n \cosh^{-1} \omega), & \omega > 1. \end{cases}$$

The recursion formula for finding the n th-order polynomial is

$$C_0(\omega) = 1,$$

$$C_1(\omega) = \omega,$$

$$C_n(\omega) = 2\omega C_{n-1}(\omega) - C_{n-2}(\omega).$$

The equations for calculating the pole locations are given in appendix A.

2.4.3 Elliptic


The third type of filter approximation considered in this report is called the elliptic approximation and was first introduced by Wilhelm Cauer. This approximation is based on the Jacobi elliptic sine functions. In this approximation, the error in the passband is again distributed evenly in an oscillating manner. However, instead of a monotonically decreasing characteristic in the stop band, the stop-band attenuation oscillates between infinity and a prescribed maximum. Thus, there is an equiripple characteristic in both passband and stop band. The elliptic approximation is more efficient than the Butterworth and Chebyshev approximations in that the transition between passband and stop band is steeper for a given filter order. An elliptic filter transfer function has both poles and zeros and has been shown to be optimal in the sense of having the sharpest transition of any approximation. The technique used to calculate the coefficients for the elliptic filter is given in appendix A and was taken from the development by Antoniou.¹

¹A. Antoniou, *Digital Filters: Analysis and Design*, McGraw-Hill Book Co., Inc., New York (1979).

2.5 Digital Filter Realization

There are two possible canonical forms of linear difference equations that can be realized from the z domain transfer function, $H(z)$. One, the cascade form, follows from the factored form of $H(z)$. The other, the parallel form, requires the expansion of $H(z)$ into partial fractions. The parallel form was chosen for this project because of its reduced sensitivity to noise.

Realization of a recursive digital filter in parallel form is shown in figure 2.

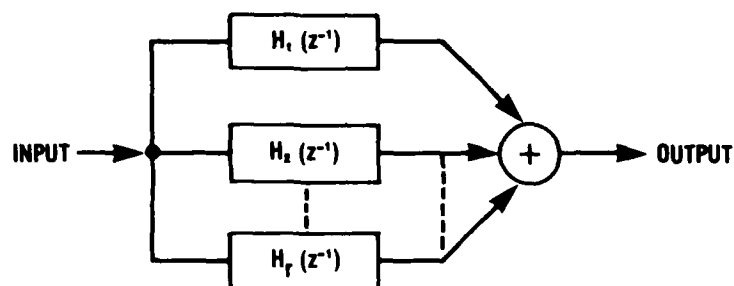

$$H(z^{-1}) = \sum_{k=1}^r \frac{A_{0k} + A_{1k} z^{-1}}{1 + B_{1k} z^{-1} + B_{2k} z^{-2}}$$

Figure 2. Recursive digital filter in parallel form.

2.6 Band Transformations

For this project, high-pass, band-pass, and band-stop filters are obtained from the digital low-pass prototype by a transformation in the z domain. Another approach is to design the analog low-pass prototype, perform the transformation in the s domain to high pass, band pass, or band stop, and then transform the resulting transfer function to the z domain by the bilinear transformation.

The work of Constantinides⁵ was used to develop the z domain transformations. The equations are given in appendix A.

⁵A. G. Constantinides, *Spectral Transformations for Digital Filters*, *Proc. IEE*, 117 (August 1970), 1585-1590.

3. FORTRAN IV PROGRAM

3.1 Outline

A FORTRAN IV computer program was written using the equations and the techniques discussed in section 2. The program was designed in a modular form to allow for easy modification as required. The flow chart of the program is given in figure 3. The main part of the program is simply a controller that calls in subroutines as required. The blocks in a column in the center of the flow chart are all in the main program, and the blocks to the right or the left of center are separate subroutines. For instance, if a different form of input data is required or a different output format is desired, then only the subroutine dealing specifically with that function need be modified. If a different analog design type or technique is to be used, it can be either substituted for one of the existing three design types or added on by extending a "computed go to" statement in the main program.

All data are stored in labeled and unlabeled common areas of a subroutine simply by including the proper common statement.


This program was developed by using an IBM System/370 computer. The H Extended Plus FORTRAN compiler was used with the auto-double option specified. This option doubles the overall precision specified in the program. Maximum possible precision is used for all the design calculations as well as in the implementation itself. This precision is 16 bytes for real variables and 32 bytes for complex variables. The complete program listing is given in appendix B.

The flow of the program is straightforward because it begins at the top and progresses without any diversions to the bottom of the chart. The basic steps of the program and the general function of each subroutine are as follows.

3.1.1 RDATA

After the program is initiated, it immediately calls the RDATA subroutine. This subroutine reads in the necessary filter design criteria and the data samples to be processed. Only batch processing of data is possible with the existing program, but the conversion to real time processing would not be difficult. The input data array is dimensioned for up to 1000 amplitude points at the specified sampling frequency. If only a filter design is required, then the number of data points (NTIMES) is set equal to zero, and RDATA bypasses the input of data to be processed. Setting NTIMES equal to zero bypasses also the implementation subroutine. RDATA also prints out the design criteria data for future reference.

The specific format required for data input is given in section 3.2.

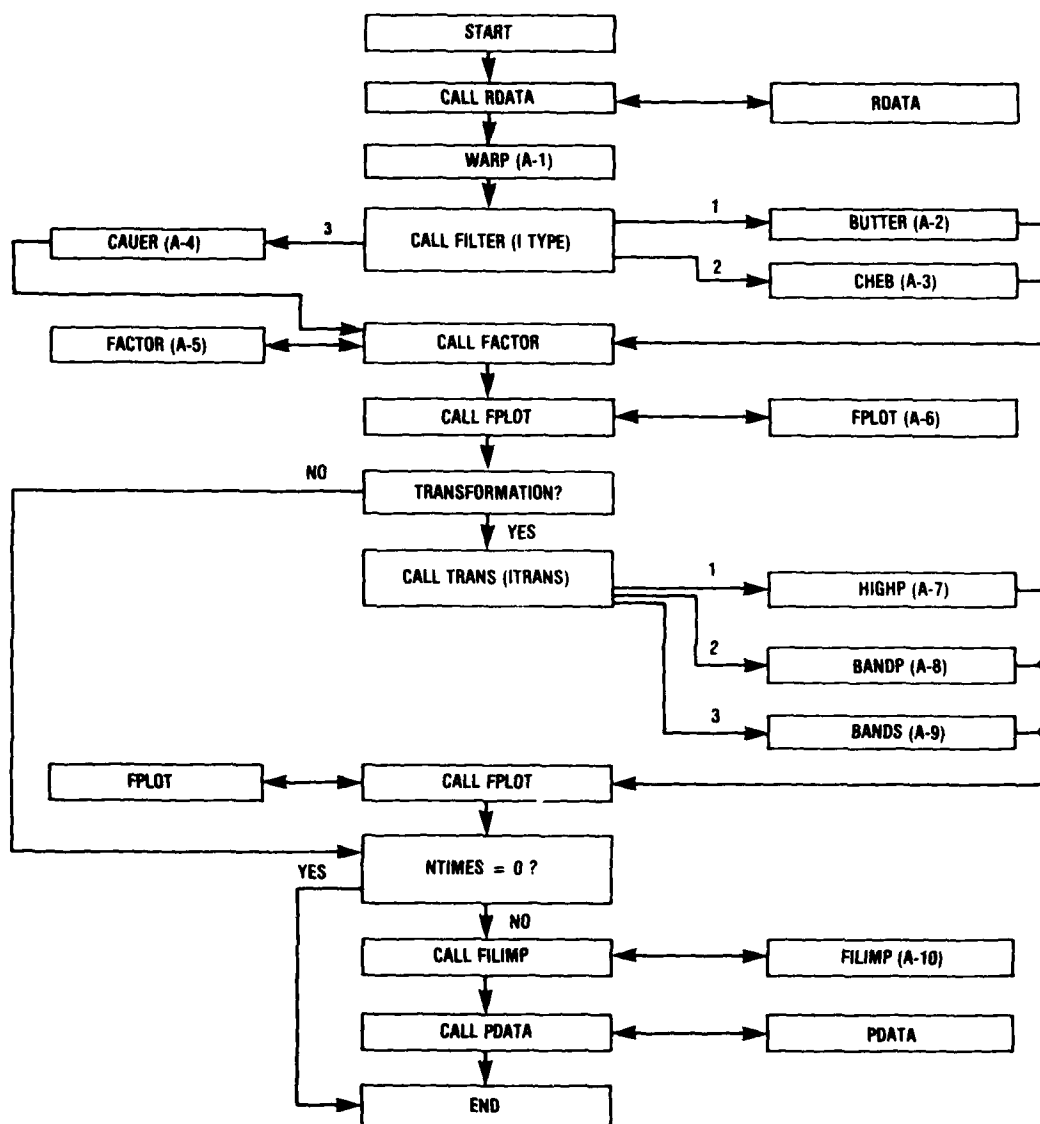

NOTE: NUMBERS IN PARENTHESES CORRESPOND TO SECTIONS IN APPENDIX A.

Figure 3. Recursive digital filter program.

3.1.2 WARP

The RDATA subroutine returns control to the main program, which calculates the prewarped analog design frequency (WARP) and then calls the appropriate analog design subroutine. The analog filter subroutines calculate the poles and the zeros (if any) of the squared magnitude transfer function that lie in the left half of the complex s plane. The resulting transfer function after the right-half plane poles and zeros are eliminated is of the form

$$H(s) = \frac{(AMP)(s - z_1)(s - z_2) \dots (s - \bar{z}_1)}{(s - p_1)(s - p_2) \dots (s - \bar{p}_1)}$$

where $\bar{z}_i$ and $\bar{p}_i$ are complex conjugates of z_i and p_i (for all i). The equations needed to calculate these poles and zeros are given in appendix A and are derived as discussed in section 2.

3.1.3 FACTOR

The FACTOR subroutine is then called. FACTOR expands the transfer function into partial fractions. If the numbers of poles and zeros are equal, then this expansion has a constant gain equal to the amplitude multiplier (AMP) of the transfer function. FACTOR then combines the complex conjugate pairs and applies the bilinear transformation,

$$s = \frac{2}{T} \frac{1 - z^{-1}}{1 + z^{-1}},$$

to obtain the coefficients for the parallel second-order sections of the digital filter. The general form of the resulting z domain transfer function is⁶

$$H(z^{-1}) = (1 + z^{-1}) \sum_{i=1}^r \frac{A_{0i} + A_{1i}z^{-1}}{1 + B_{1i}z^{-1} + B_{2i}z^{-2}},$$

where $r = n/2$ for n even, $r = (n + 1)/2$ for n odd, and n is the order of the filter. The coefficients A_{0i} , A_{1i} , B_{1i} , and B_{2i} are calculated by FACTOR using the analog poles and zeros. If the order of the filter is odd, then there is one real pole, so the A_1 and B_2 coefficients are equal to zero for that pole.

⁶G. C. Temes and S. K. Mitra, *Modern Filter Theory and Design*, John Wiley & Sons, Inc., New York (1973).

3.1.4 FPLOTT

A plot of the frequency response (magnitude and phase) of the low-pass digital filter is then made by the FPLOTT subroutine. It is plotted by letting

$$z^{-1} = e^{-j\omega T} = \cos \omega T - j \sin \omega T$$

in the z domain transfer function given above.

The plots given in this report were made on a Houston Instruments plotter using existing plotting software.¹ Both the amplitude and phase responses are plotted over the normalized range of frequencies of zero to one. That is, the frequency scale is normalized to the sampling frequency. FPLOTT also prints the values of the digital filter coefficients to 25 decimal places for future use.

3.1.5 Filter Choice

The main program then determines if a high-pass, band-pass, or band-stop filter is desired or if the low-pass filter is ready to be implemented.

The transfer function for the required high-pass, band-pass, or band-stop filter is obtained by an appropriate transformation in the z domain of the low-pass digital filter. Band-pass and band-stop transformations result in a doubling of the filter order.

After transformation, the frequency characteristics of the new filter are plotted by FPLOTT.

3.1.6 FILIMP

The actual implementation of the digital filter is simple. The FILIMP subroutine performs this function and processes the data to be filtered. Application of the inverse z transform to the general form for the z domain transfer function results in the recursive difference equation

$$Y_{out}(kT) = X(kT) + X[(k-1)T] ,$$

¹Thomas V. Noon and Egon Marx, *User's Manual for the Modular Analysis-Package Libraries ANAPAC and TRANL*, Harry Diamond Laboratories HDL-TR-1782-S (September 1978).

where

$$X(kT) = \sum_{i=1}^r X_i(kT) ,$$

$$X_i(kT) = A_{0i}Y_{in}(kT) + A_{1i}Y_{in}[(k-1)T] \\ - B_{1i}X_i[(k-1)T] - B_{2i}X_i[(k-2)T] .$$

3.1.7 PDATA

The PDATA subroutine provides plots of the input and output data. This routine may be easily modified to provide the output data in any desired format.

3.2 Program Use

There are at most nine parameters that must be supplied to the program for the design of a filter. The minimum number needed is five for the design of a Butterworth low-pass filter. This minimum set, which is used in all designs, consists of these parameters:

- a. ITYPE, the type of analog design
 - 1 = Butterworth
 - 2 = Chebyshev
 - 3 = Elliptic (Cauer)
- b. N, the order of the filter
- c. ITRANS, corresponding to the band transformation desired
 - 0 = None
 - 1 = High-pass transformation
 - 2 = Band-pass transformation
 - 3 = Band-stop transformation
- d. FC, the cutoff frequency desired (in hertz)
- e. FS, the sampling frequency of the data (in hertz) to which the filter will be normalized

If a low-pass Chebyshev is required, then an additional parameter, EPS1, the minimum allowed amplitude in the passband, also must be entered. Similarly, for elliptic filters, EPS1 must be given along with EPS2, the transition region selectivity factor. The maximum value for EPS2 is 0.95. All of these parameters are read from the same data card. These are the formats for all the data cards and the order in which the cards are read by the program:

ITYPE,N,ITRANS,FC,FS,EPS1,EPS2
Format--3I5, 4E10.3

If ITRANS = 0, skip reading F1 and F2.

F1,F2
Format--2E10.3

NTIMES
Format--I5

If ITIMES = 0, skip reading VIN.

VIN
Format--8E10.3--maximum of 125 cards

Heading for low-pass design

If ITRANS = 0, skip next heading.

Heading for band transformation

If NTIMES = 0, skip next two headings.

Heading for VIN plot

Heading for VOUT plot

If a band transformation is specified, then an additional data card is needed that has the lower cutoff frequency, F1 (also the high-pass cutoff frequency), and the upper cutoff frequency, F2, for the band-pass and band-stop filters.

Next, the number of data sample points is read. If NTIMES is set equal to zero, then no input data are read, and the program is terminated after completion of the filter design.

Separate titles are read in for the low-pass filter transfer function plots, any band transformation frequency plots, and the heading to appear on the data plots. These titles can be up to 80 characters of any form desired.

A sample filter design is given now to illustrate the order and the manner in which the data are assembled. A fourth-order elliptic band-pass filter is chosen since this design requires input of all the design parameters. We have this:

ITYPE = 3

N = 4

ITRANS = 2

Now let us assume that the sampling frequency is 10,000 Hz and that the passband is to be from 1000 to 3000 Hz. In addition, we allow the passband amplitude to vary between 1.0 and 0.9 and minimize the transition between the passband and the stop band. This action means that the cutoff frequency for the low-pass design must be 2000 Hz, which is the width of the passband. Therefore, the remaining parameters are these:

FC = 2000.0

FS = 10000.0

EPS1 = 0.9

EPS2 = 0.95

F1 = 1000.0

F2 = 3000.0

These data are given in figure 4 as they appear on the input data cards. The plot title cards also are shown in the figure. If only a low-pass design is requested, then the second title card is omitted. Similarly, if no data points are given, then the third title card as well as the input data cards are omitted.

The resulting printout for this example problem is given in figure 5. The low-pass transfer function is given in figures 6 and 7, and the band-pass function is given in figures 8 and 9. Running this example required 6.85 s in the central processing unit (CPU) to compile the FORTRAN coding, 2.44 s in the CPU to link and edit the object modules with library functions, and about 2 s in the CPU to perform the actual calculations. The filtering of 101 data points required less than 2 s of CPU time. Additional examples of filter designs are given in section 4.

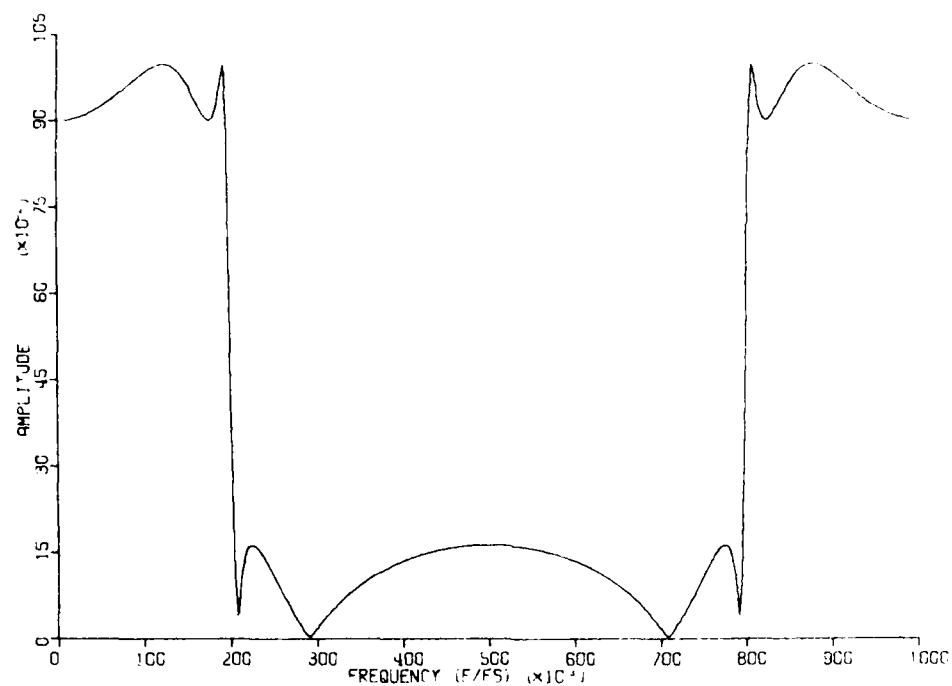


Figure 6. Low-pass Cauer filter: amplitude versus frequency.

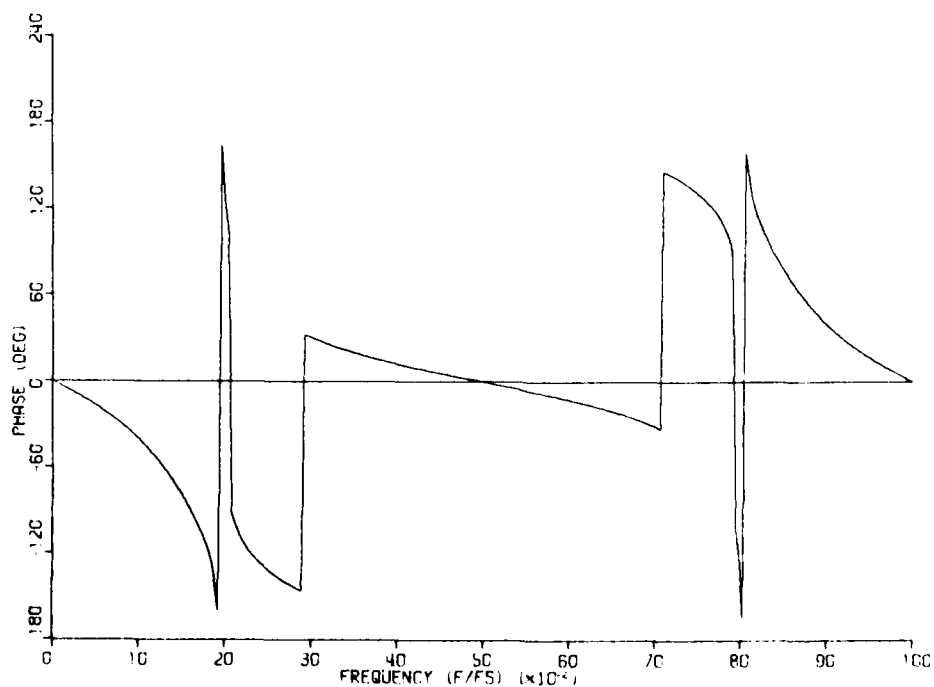


Figure 7. Low-pass Cauer filter: phase versus frequency.

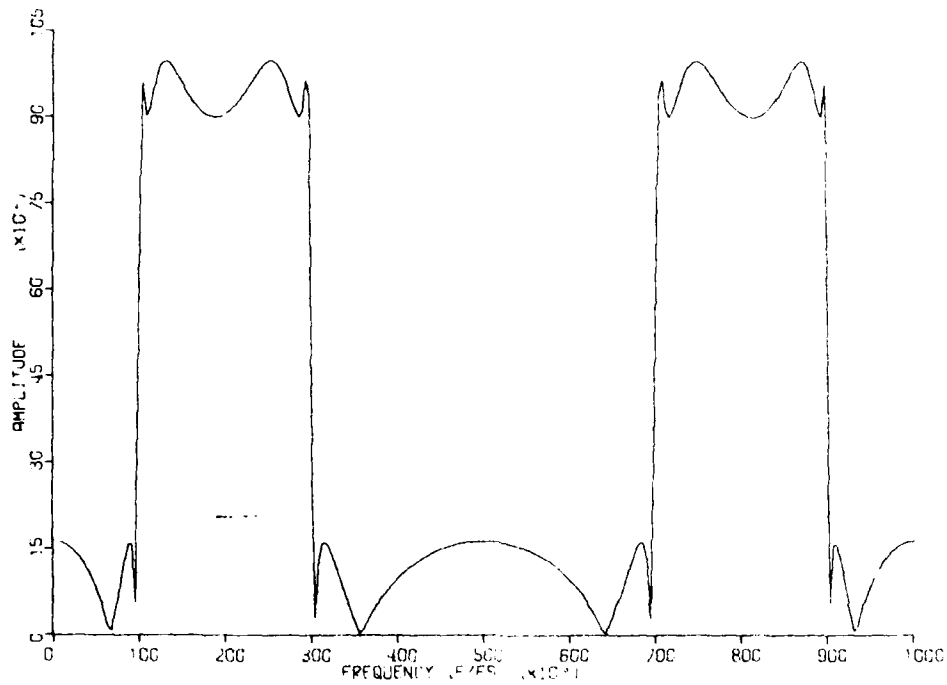


Figure 8. Band-pass Cauer filter: amplitude versus frequency.

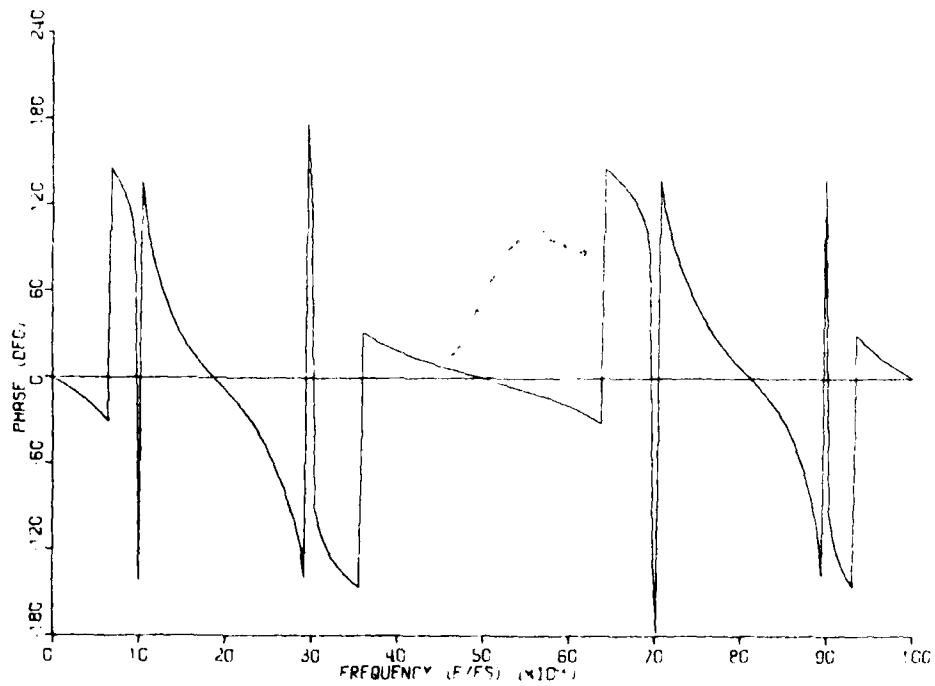


Figure 9. Band-pass Cauer filter: phase versus frequency.

4. DESIGN EXAMPLES

Several examples are given in this section to illustrate the differences in the various analog designs and also to show the results of band transformations. In addition, a simple waveform consisting of three sinusoids at different frequencies is used to demonstrate the filtering action of the various digital filters.

4.1 Analog Design

The three types of analog designs are discussed in section 2. A graphical presentation of the basic differences in these three designs is given here. A fourth-order elliptic low-pass design is given in section 3.2. Similar fourth-order digital filters using the Butterworth and Chebyshev analog designs are presented in figures 10 to 13. Comparing these transfer functions, we can easily see that the Butterworth filter offers the smoothest response in both the passband and the stop band. The sharper transition from passband to stop band of the Chebyshev design over the Butterworth is obtained at the expense of smoothness in the passband. The elliptic design obviously has the sharpest transition of the three designs. However, the ripple in both the passband and the stop band is the penalty for this sharp transition. The design to use is chosen according to the requirements of the specific filtering problem being considered.

4.2 Band Transformations

An example of a band-pass transformation is given in figures 8 and 9. The low-pass Butterworth filter of figures 10 and 11 was transformed to a high-pass filter with a cutoff of 3000 Hz as shown in figures 14 and 15. The band-stop dual of the passband filter was made by using the Chebyshev design and is shown in figures 16 and 17.

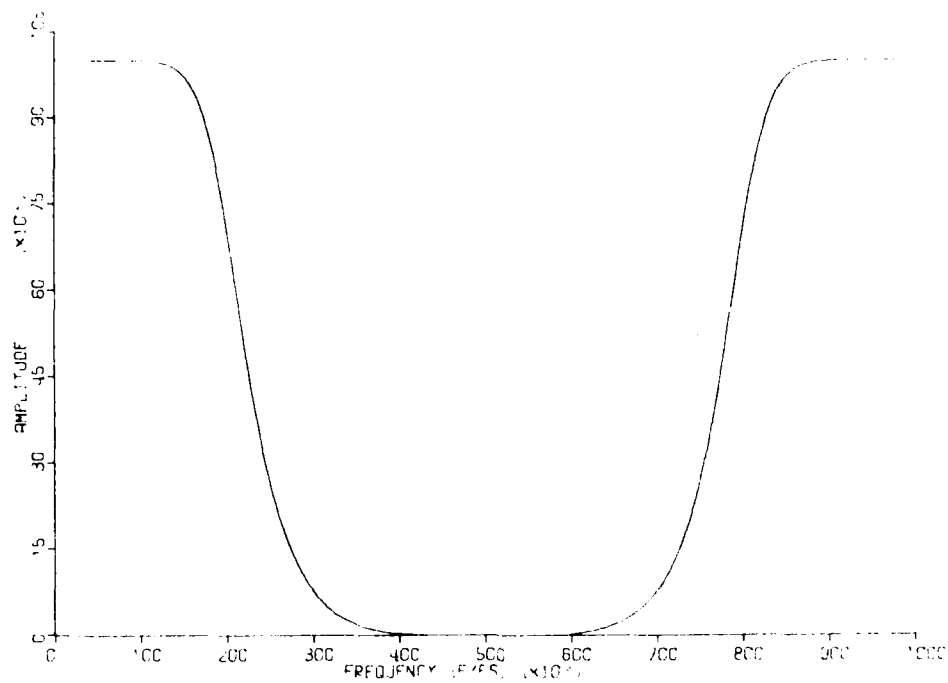


Figure 10. Low-pass Butterworth filter: amplitude versus frequency.

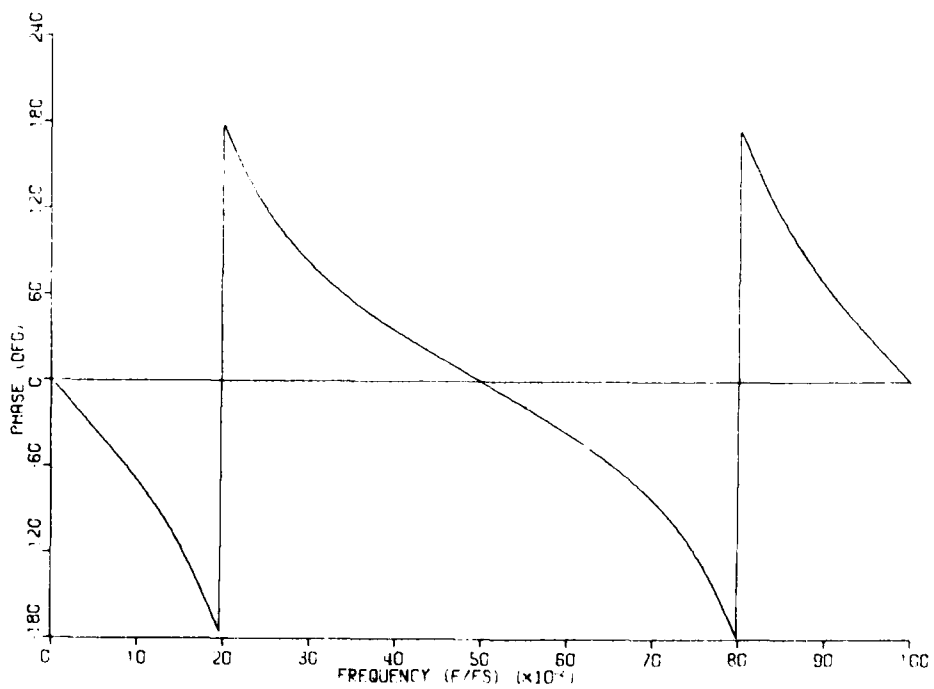


Figure 11. Low-pass Butterworth filter: phase versus frequency.

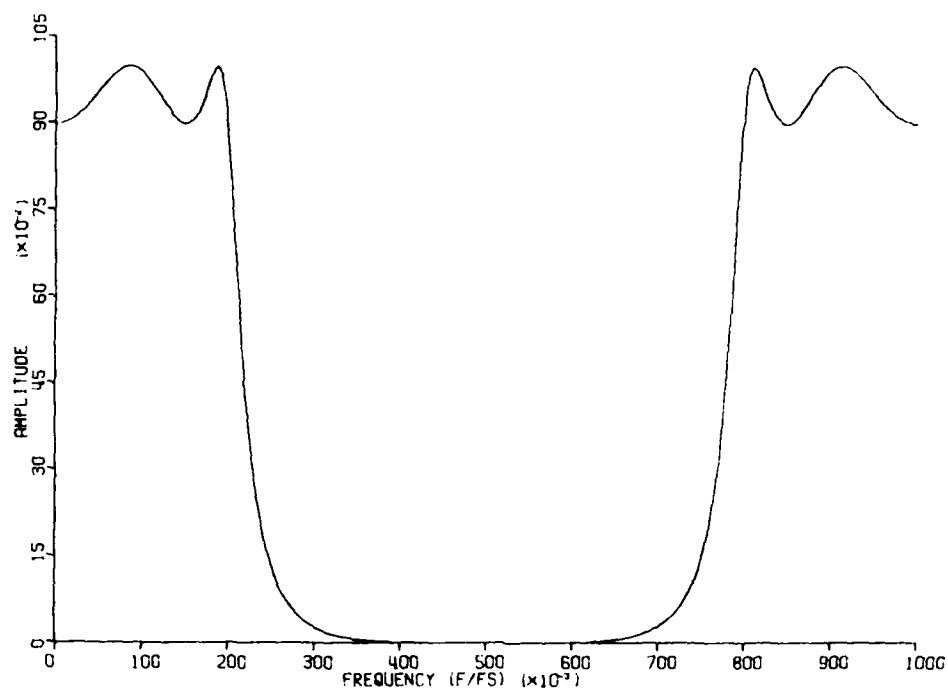


Figure 12. Low-pass Chebyshev filter: amplitude versus frequency.

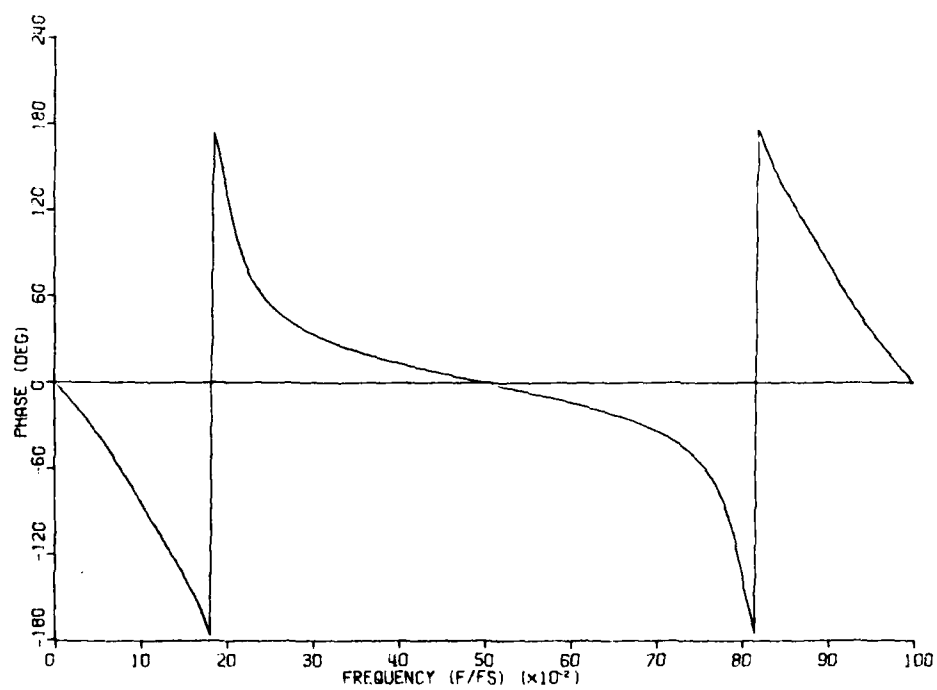


Figure 13. Low-pass Chebyshev filter: phase versus frequency.

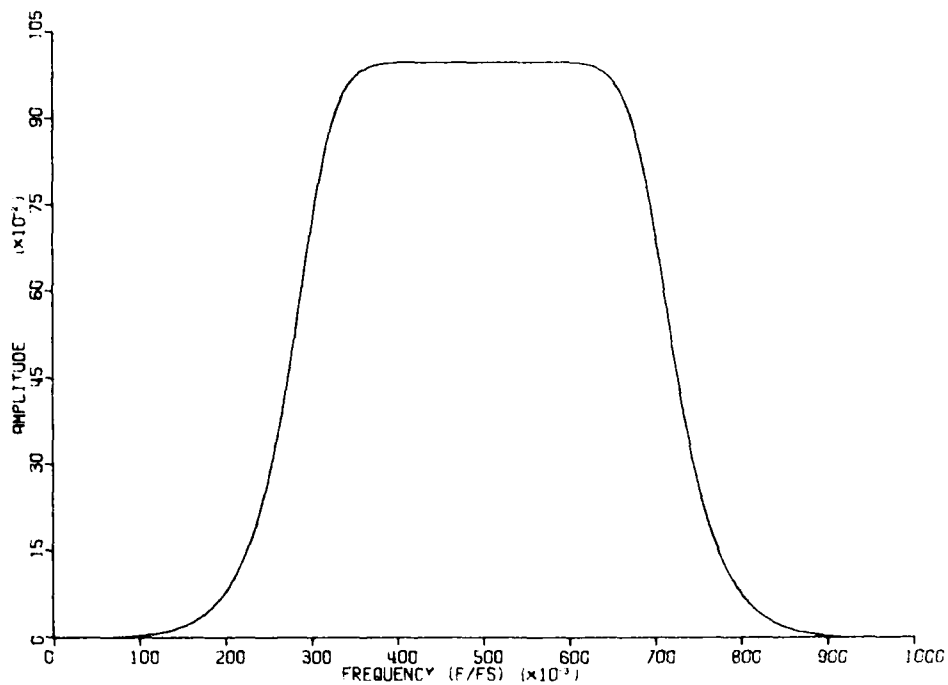


Figure 14. High-pass Butterworth filter: amplitude versus frequency

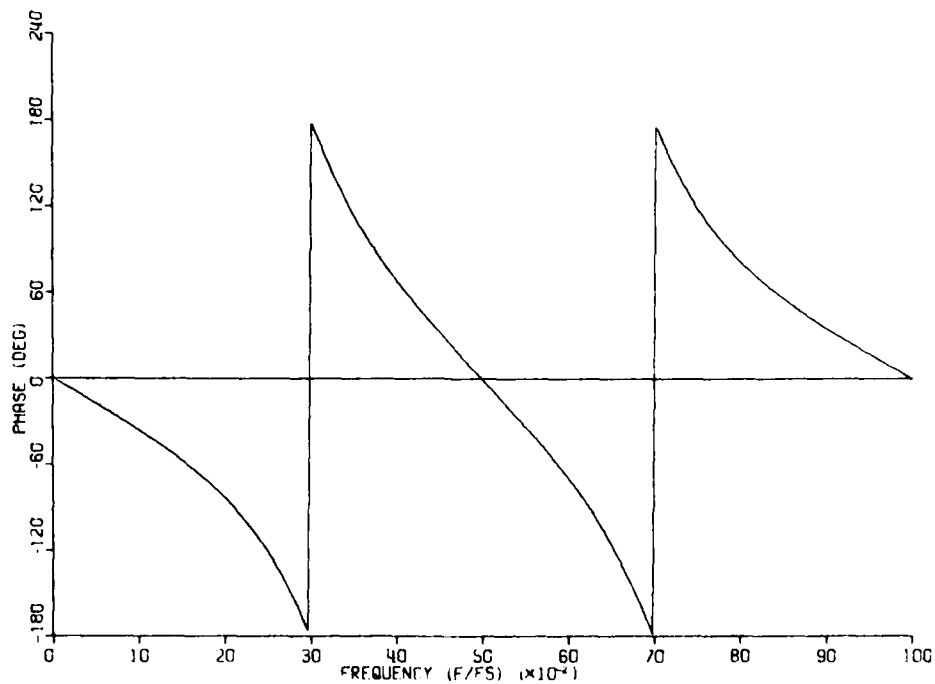


Figure 15. High-pass Butterworth filter: phase versus frequency.

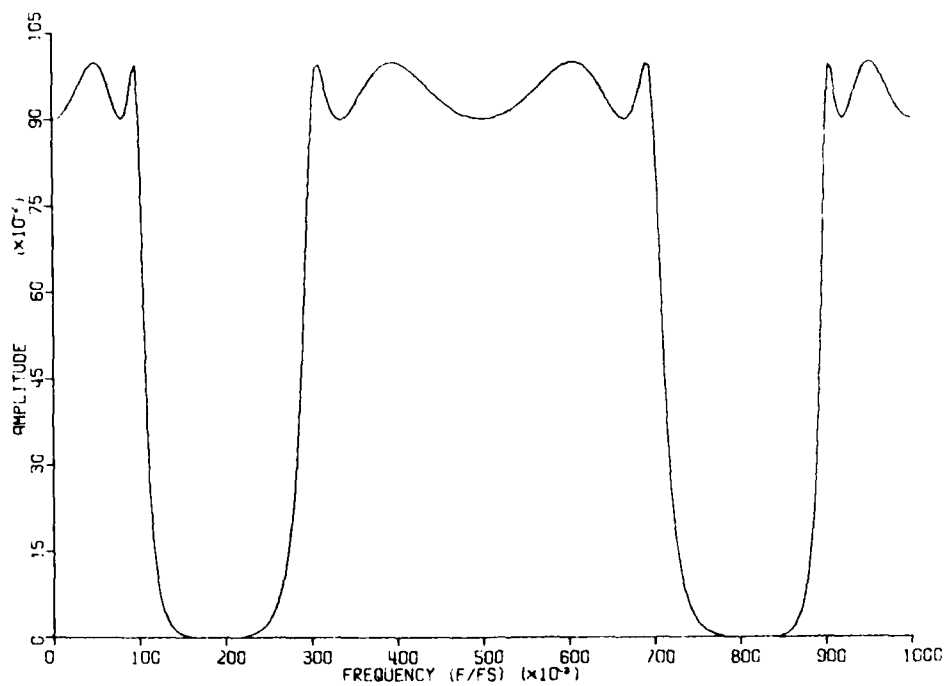


Figure 16. Band-stop Chebyshev filter: amplitude versus frequency.

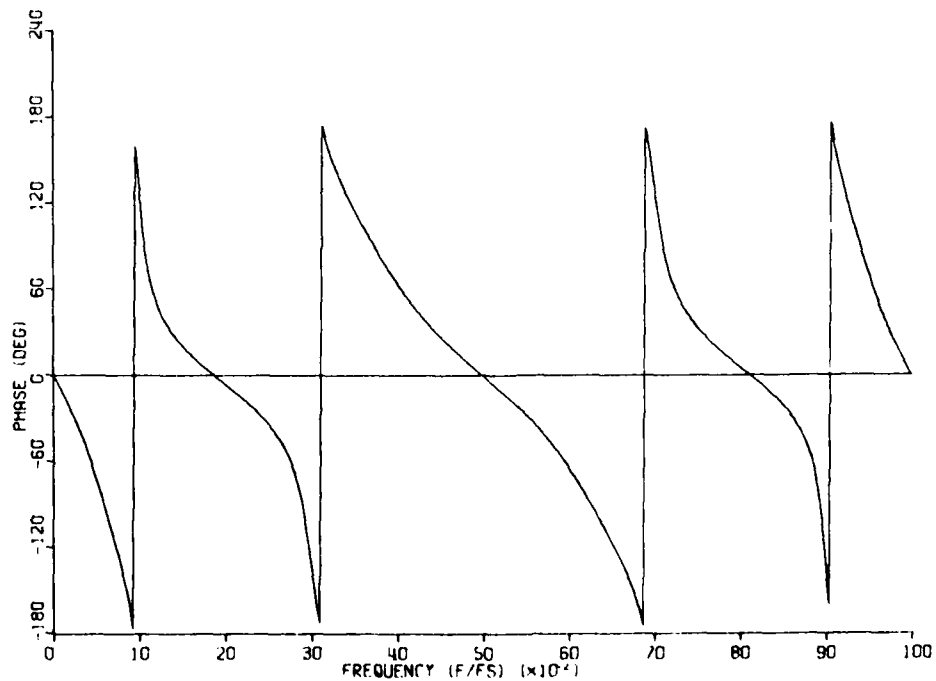


Figure 17. Band-stop Chebyshev filter: phase versus frequency.

4.3 Data Processing

A simple waveform was generated to illustrate the operation of the filters on input data. The waveform used was the sum of three sinusoids at 0.05, 0.15, and 0.35 times the sampling frequency with peak amplitudes of 3, 2, and 5, respectively. This input waveform is shown in figure 18. A 20th-order Butterworth low-pass design was used to eliminate the two highest frequency sine waves, as shown in figure 19. A filter of high order was used to demonstrate the group delay effect of the filter. This effect shows at the beginning of the output waveform as a delay time before any output occurs. Next, a fourth-order Butterworth high-pass filter was used to eliminate the two low-frequency signals. This result is shown in figure 20. The low sampling rate caused the distortion on the sine wave seen in this figure. The initial design example was used to pass only the center sinusoid as shown in figure 21. Here, again, the effect of the low sampling rate is seen as a distortion of the waveform. However, the effect is not as great because of the lower frequency of the sinusoid. The Chebyshev band-stop dual of this passband filter was then used to eliminate the middle sine wave. This waveform is given in figure 22.

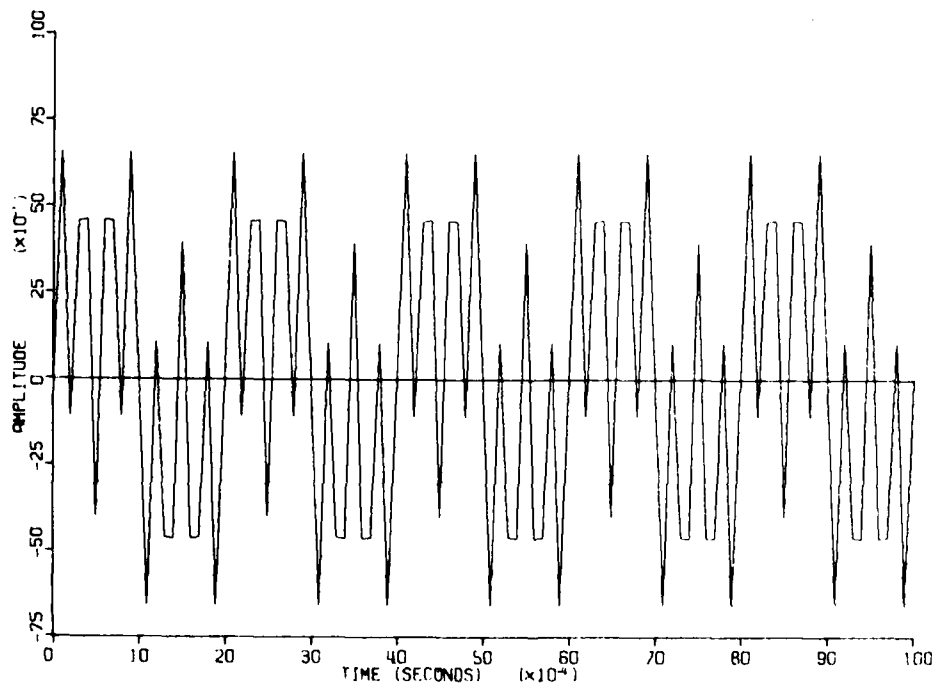


Figure 18. Input waveform obtained by summing three sinusoids.

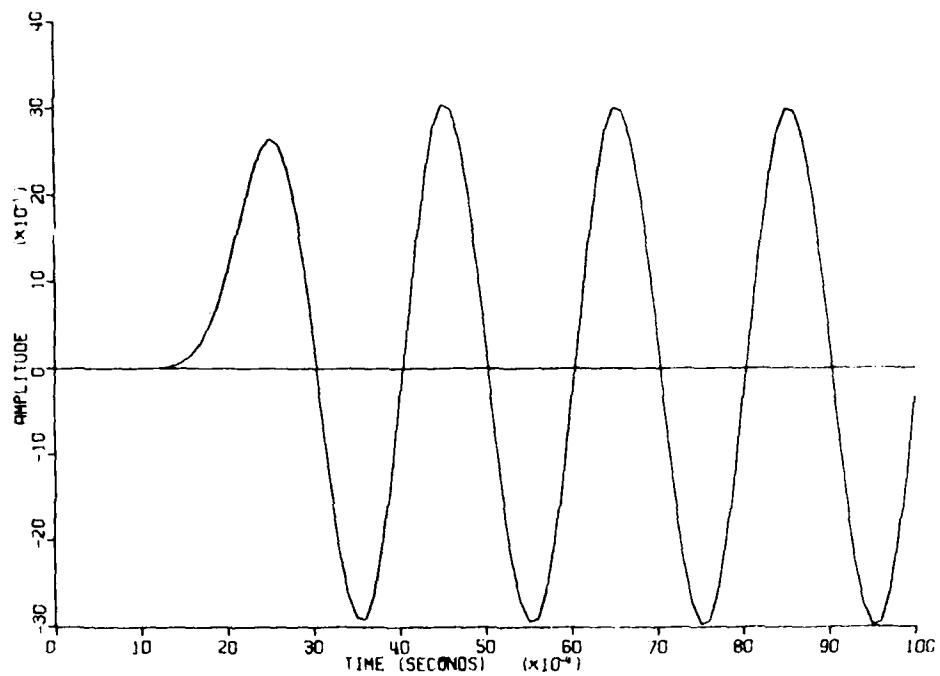


Figure 19. Output waveform obtained by using low-pass Butterworth filter.

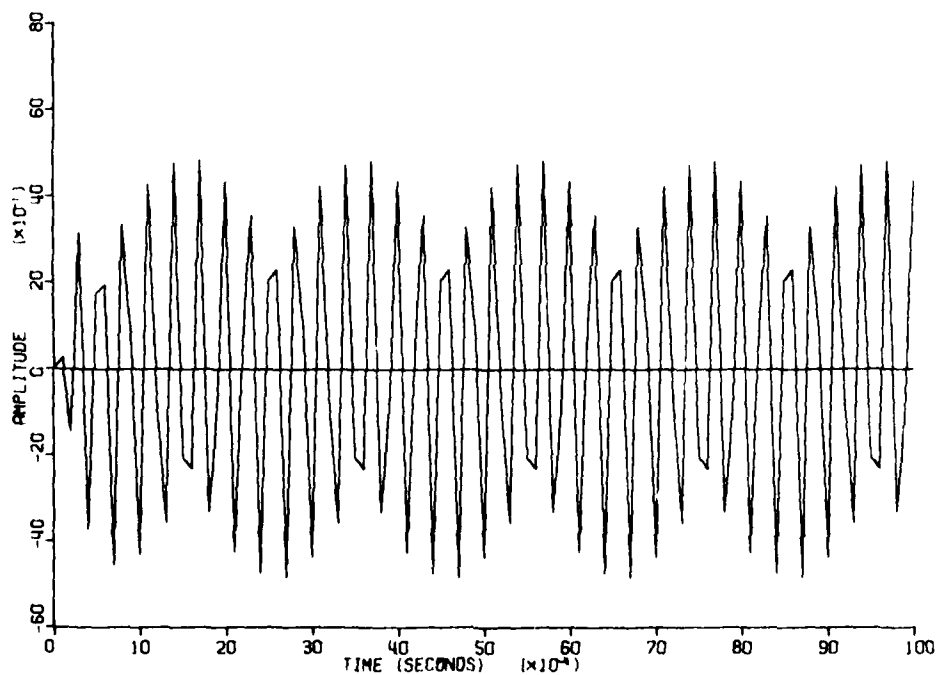


Figure 20. Output waveform obtained by using high-pass Butterworth filter.

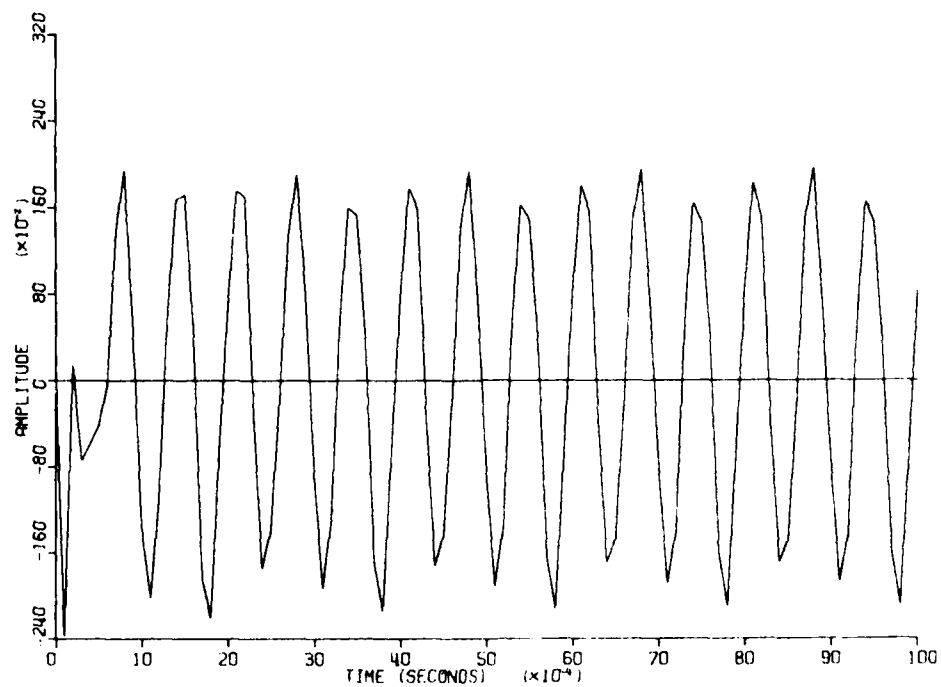


Figure 21. Output waveform obtained by using band-pass Cauer filter.

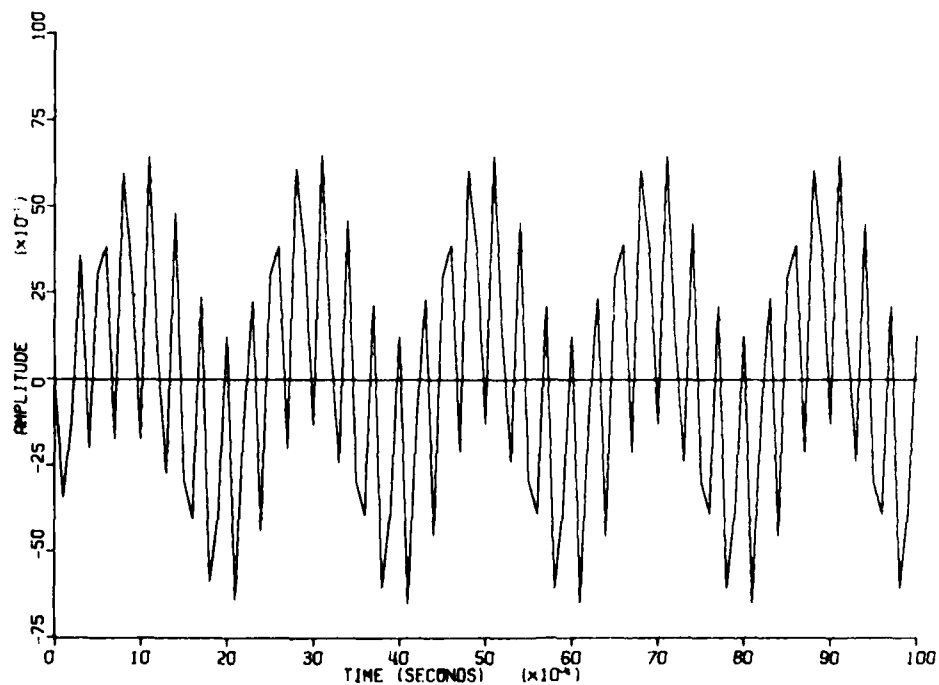


Figure 22. Output waveform obtained by using band-stop Chebyshev filter.

5. CONCLUSIONS AND RECOMMENDATIONS

A versatile program has been developed for designing and implementing recursive digital filters. Three well-known analog filter designs were used with the bilinear transformation to obtain the desired digital filters. The bilinear technique was chosen because it eliminates the effects of aliasing that occur with other techniques. However, the resulting warping of the frequency scale may not be acceptable in some applications. The extent to which this warping affects the resulting output was not investigated. Examples using the different analog designs are given in section 4 along with transformations from low-pass to high-pass, band-pass, and band-stop designs. All of the filter design calculations as well as the implementations use the highest precision possible for the IBM System/370 computer. No investigation was made to determine the effects of using lower precision.

All of the equations used in developing the code are included in appendix A, and the complete computer program code is listed in appendix B. A bibliography of related publications also is included. This bibliography is by no means complete since the amount of information published seems almost endless. Although there is a large amount of information available, no one source proved adequate in presenting all of the steps necessary to completely develop a digital filter. It is hoped, therefore, that this document will prove helpful to others venturing into this field for the first time.

Although the program developed here is completely operable, there are many ways in which the program may be improved or modified to better suit a particular filtering need. Also, investigation and analysis of the various errors associated with the techniques used should be conducted.

LITERATURE CITED

- (1) A. Antoniou, Digital Filters: Analysis and Design, McGraw-Hill Book Co., Inc., New York (1979).
- (2) M. S. Ghausi, Principles and Design of Linear Active Circuits, McGraw-Hill Book Co., Inc., New York (1965), ch. 4.
- (3) H. Y.-F. Lam, Analog and Digital Filters, Prentice-Hall, Inc., Englewood Cliffs, NJ (1979).
- (4) D. E. Johnson, Introduction to Filter Theory, Prentice-Hall, Inc., Englewood Cliffs, NJ (1976).
- (5) A. G. Constantinides, Spectral Transformations for Digital Filters, Proc. IEE, 117 (August 1970), 1585-1590.
- (6) G. C. Temes and S. K. Mitra, Modern Filter Theory and Design, John Wiley & Sons, Inc., New York (1973).
- (7) Thomas V. Noon and Egon Marx, User's Manual for the Modular Analysis-Package Libraries ANAPAC and TRANL, Harry Diamond Laboratories HDL-TR-1782-S (September 1978).

SELECTED BIBLIOGRAPHY

Blinchikoff, H. J., and Zverev, A. I., Filter in the Time and Frequency Domains, John Wiley & Sons, Inc., New York (1976).

Cappellini, V., Constantinides, A. G., and Emiliani, P., Digital Filters and Their Applications, Academic Press, Inc., New York (1978).

Childers, D., and Durling, A., Digital Filtering and Signal Processing, West Publishing Co., St. Paul, MN (1975).

Darlington, S., Simple Algorithms for Elliptic Filters and Generalizations Thereof, IEEE Trans. Circuits Syst., CAS-25 (December 1978), 975-980.

Deczky, A. G., Equiripple and Minimax (Chebyshev) Approximations for Recursive Digital Filters, IEEE Trans. Acoust., Speech, Signal Process., ASSP-22 (April 1974).

Fretter, S. A., Introduction to Discrete-Time Signal Processing, John Wiley & Sons, Inc., New York (1976).

Gibbs, A. J., The Design of Digital Filters, Aust. Telecommun. Res. J., 4 (1970), 29-34.

Gold, B., and Rader, C. M., Digital Processing of Signals, McGraw-Hill Book Co., Inc., New York (1969).

Hamming, R. W., Digital Filters, Prentice-Hall, Inc., Englewood Cliffs, NJ (1977).

Liu, B., Digital Filters and the Fast Fourier Transform, Halsted Press, New York (1975).

Oppenheim, A. V., Applications of Digital Signal Processing, Prentice-Hall, Inc., Englewood Cliffs, NJ (1978).

Oppenheim, A. V. and Schaffer, R. W., Digital Signal Processing, Prentice-Hall, Inc., Englewood Cliffs, NJ (1975).

Rader, C. M., and Gold, B., Digital Filter Design Techniques in the Frequency Domain, Proc. IEEE, 55 (February 1967), 149-171.

Rakovich, B. D., and Litovski, V. B., Monotonic Passband Low-Pass Filters with Chebyshev Stopband Attenuation, IEEE Trans. Acoust., Speech, Signal Process., ASSP-22 (February 1974).

Stearns, S. D., Digital Signal Processing, Hayden Book Co., Inc., Rochelle Park, NJ (1975).

APPENDIX A.--EQUATIONS USED FOR CODE DEVELOPMENT

CONTENTS

	<u>Page</u>
A-1. PREWARPING	37
A-2. BUTTERWORTH	37
A-3. CHEBYSHEV	37
A-4. ELLIPTIC	39
A-5. FACTOR	41
A-6. MAGNITUDE AND PHASE	42
A-7. HIGH-PASS TRANSFORMATION	43
A-8. BAND-PASS TRANSFORMATION	43
A-9. BAND-STOP TRANSFORMATION	45
A-10. FILTER IMPLEMENTATION	46

APPENDIX A

The following equations were used in the development of the computer code for designing and implementing digital filters. All of the equations are referenced in the main body of this report. The application of each set of equations is given in the flow chart of the program (fig. 3).

A-1. PREWARPING (WARP)

$$\tilde{f}_c = \frac{f_{AC}}{f_s} = \frac{1}{\pi} \tan \left(\pi \frac{f_{DC}}{f_s} \right).$$

A-2. BUTTERWORTH

The transfer function for a Butterworth low-pass filter of order n is given by

$$H(s) = \frac{H_0}{\prod_{k=1}^n (s - p_k)},$$

where

$$H_0 = \tilde{\omega}_c^n,$$

$$\tilde{\omega}_c = \text{cutoff frequency},$$

$$p_k = \tilde{\omega}_c e^{j[(\pi/2) + \pi(2k-1)/2n]}, \quad k = 1, 2, \dots, n.$$

A-3. CHEBYSHEV

The squared magnitude function is of the form


$$|H(j\omega)|^2 = \frac{1}{1 + \epsilon^2 C_n^2(\omega)},$$

where

ϵ = ripple factor,

$C_n(\omega)$ = Chebyshev polynomial.

APPENDIX A

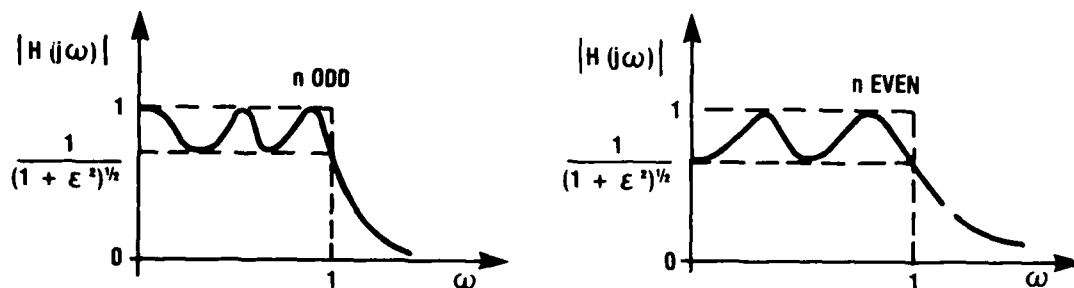

For the program, ϵ is entered as

$$\text{EPS1} = 1 - \frac{1}{(1 + \epsilon^2)^{1/2}}.$$

The transfer function is of the form

$$H(s) = \frac{H_0}{\prod_{k=1}^n (s - p_k)},$$

where


$$p_k = \sin(u_k) \sinh(v) + j \cos(u_k) \cosh(v) = \alpha_k + j\beta_k,$$

$$u_k = \frac{\pi}{2n} (2k - 1), \quad k = n + 1, n + 2, \dots, 2n,$$

$$v = \frac{1}{n} \sinh^{-1} \left(\frac{1}{\epsilon} \right),$$

$$H_0 = \begin{cases} [\alpha_{(n+1)/2}] \prod_{k=1}^{(n-1)/2} (\alpha_k^2 + \beta_k^2), & n \text{ odd}, \\ \frac{1}{(1 + \epsilon^2)^{1/2}} \prod_{k=1}^{n/2} (\alpha_k^2 + \beta_k^2), & n \text{ even}. \end{cases}$$

A-4. ELLIPTIC (CAUER)

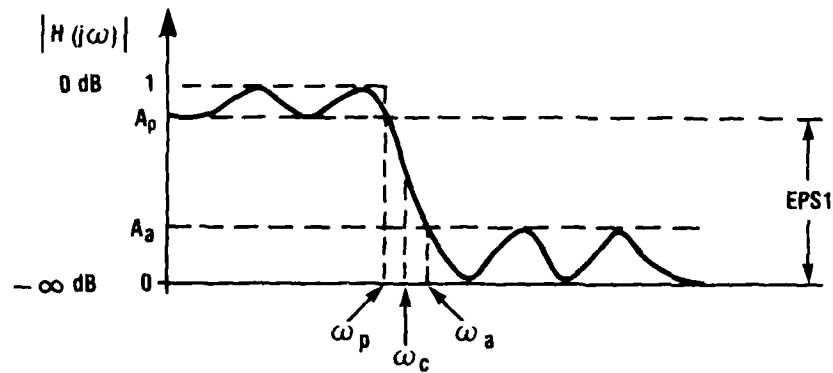

For the normalized filter $\omega_c = 1$,

n = filter order,

$$\omega_c = (\omega_p \omega_a)^{1/2} = 1,$$

k = selectivity factor = ω_p / ω_a ,

A_p = maximum passband attenuation (in decibels),

A_a = minimum stop-band attenuation (in decibels).

Of the parameters A_p , A_a , k , and n , only three are independent. If three of the four are specified, the fourth is automatically fixed. For this project, n , k , and A_p are specified:

$$k = \text{EPS2},$$

$$A_p = 20 \log (1 - \text{EPS1}).$$

A_a is then given by

$$A_a = 10 \log \left(\frac{10^{-0.1 A_p} - 1}{16q^n} + 1 \right).$$

APPENDIX A

The normalized elliptic low-pass filter has a transfer function of the form

$$H_N(s) = \frac{H_0}{D_0(s)} \prod_{i=1}^r \frac{s^2 + A_{0i}}{s^2 + B_{1i}s + B_{0i}},$$

where

$$r = \begin{cases} (n-1)/2, & n \text{ odd}, \\ n/2, & n \text{ even}, \end{cases}$$

$$D_0(s) = \begin{cases} s + \sigma_0, & n \text{ odd}, \\ 1, & n \text{ even}. \end{cases}$$

The transfer function coefficients and multiplier constant H_0 are computed by using the following formulas in sequence:

$$k' = (1 - k^2)^{1/2}, \quad (A-1)$$

$$q_0 = \frac{1}{2} \frac{1 - \sqrt{k'}}{1 + \sqrt{k'}}, \quad (A-2)$$

$$q = q_0 + 2q_0^5 + 15q_0^9 + 150q_0^{13}, \quad (A-3)$$

$$\Lambda = \frac{1}{2n} \ln \left(\frac{10^{-0.05A_P} + 1}{10^{-0.05A_P} - 1} \right), \quad (A-4)$$

$$\sigma_0 = \frac{2q^{1/4} \sum_{m=0}^{\infty} (-1)^m q^{m(m+1)} \sinh [(2m+1)\Lambda]}{1 + 2 \sum_{m=1}^{\infty} (-1)^m q^{m^2} \cosh (2m\Lambda)}, \quad (A-5)$$

$$\Omega_i = \frac{2q^{1/4} \sum_{m=0}^{\infty} (-1)^m q^{m(m+1)} \sin \left[\frac{(2m+1)\pi\mu}{n} \right]}{1 + 2 \sum_{m=1}^{\infty} (-1)^m q^{m^2} \cos \left(\frac{2m\pi\mu}{n} \right)}, \quad (A-6)$$

APPENDIX A

where

$$\mu = \begin{cases} i, & n \text{ odd}, \\ i - \frac{1}{2}, & n \text{ even}, \end{cases} \quad i = 1, 2, \dots, r.$$

The series in equations (A-5) and (A-6) converge rapidly, and usually three or four terms are sufficient.

$$W = \left[(1 + k\sigma_0^2)(1 + \sigma_0^2/k) \right]^{1/2}, \quad (\text{A-7})$$

$$V_i = \left[(1 - k\Omega_i^2)(1 - \Omega_i^2/k) \right]^{1/2}, \quad (\text{A-8})$$

$$A_{0i} = 1/\Omega_i^2, \quad (\text{A-9})$$

$$B_{0i} = \frac{(\sigma_0 V_i)^2 + (\Omega_i W)^2}{(1 + \sigma_0^2 \Omega_i^2)^2}, \quad (\text{A-10})$$

$$B_{1i} = \frac{2\sigma_0 V_i}{1 + \sigma_0^2 \Omega_i^2}, \quad (\text{A-11})$$

$$H_0 = \begin{cases} \sigma_0 \prod_{i=1}^r \frac{B_{0i}}{A_{0i}}, & n \text{ odd}, \\ 10^{-0.05A_p} \prod_{i=1}^r \frac{B_{0i}}{A_{0i}}, & n \text{ even}. \end{cases} \quad (\text{A-12})$$

A-5. FACTOR

$$R_k + jI_k = \frac{H_0 \prod_{m=1}^{n'} (p_k - z_m)}{\prod_{\ell=1}^n (p_k - p_\ell)}, \quad \ell \neq k, \quad n' = \begin{cases} n, & n \text{ even}, \\ n-1, & n \text{ odd}, \end{cases}$$

APPENDIX A

$$H(s) = \sum_{k=1}^r \left(\frac{R_k + jI_k}{s - p_k} + \frac{R_k - jI_k}{s - \bar{p}_k} \right), \quad r = \begin{cases} (n+1)/2, & n \text{ odd} \\ n/2, & n \text{ even} \end{cases}$$

$$s = \frac{2}{T} \frac{1 - z^{-1}}{1 + z^{-1}},$$

$$H(z^{-1}) = (1 + z^{-1}) \sum_{k=1}^r \frac{A_{0k} + A_{1k}z^{-1}}{1 + B_{1k}z^{-1} + B_{2k}z^{-2}},$$

$$p_k = -\alpha_k + j\beta_k,$$

$$A_{0k} = [R_k(1 + \alpha_k/2) - I_k(\beta_k/2)]/D,$$

$$A_{1k} = -[R_k(1 - \alpha_k/2) + I_k(\beta_k/2)]/D,$$

$$B_{1k} = -2[1 - (\alpha_k/2)^2 - (\beta_k/2)^2]/D,$$

$$B_{2k} = [(1 - \alpha_k/2)^2 + (\beta_k/2)^2]/D,$$

$$D = (1 + \alpha_k/2)^2 + (\beta_k/2)^2.$$

A-6. MAGNITUDE AND PHASE (FPLOTT)

The frequency response of the designed digital filter is calculated by substituting $e^{-j\omega T}$ for z^{-1} in the transfer function and then using complex arithmetic to obtain the magnitude and the phase as a function of frequency.

$$z^{-1} + e^{-j\omega T} = W = \cos \omega T - j \sin \omega T,$$

$$H(W) = (1 + W) \sum_{k=1}^r \frac{A_{0k} + A_{1k}W}{1 + B_{1k}W + B_{2k}W^2}.$$

A-7. HIGH-PASS TRANSFORMATION

A low-pass digital filter of cutoff frequency θ_p is first designed for the desired order, n , and type. Let ω_p = the desired high-pass cutoff frequency.

Then substituting for z^{-1} in the low-pass transfer function,

$$z^{-1} \rightarrow - \frac{z^{-1} + \alpha}{1 + \alpha z^{-1}},$$

where

$$\alpha = - \frac{\cos \left(\frac{\omega_p + \theta_p}{2} \right)}{\cos \left(\frac{\omega_p - \theta_p}{2} \right)},$$

results in the transfer function of the desired high-pass filter.

$$H_{HP}(z^{-1}) = (1 - z^{-1}) \sum_{k=1}^r \frac{A'_{0k} + A'_{1k} z^{-1}}{1 + B'_{1k} z^{-1} + B'_{2k} z^{-2}},$$

$$A'_{0k} = (1 - \alpha) \left(\frac{A_{0k} - \alpha A_{1k}}{D'} \right),$$

$$A'_{1k} = (1 - \alpha) \left(\frac{\alpha A_{0k} - A_{1k}}{D'} \right),$$

$$B'_{1k} = [2\alpha - B_{1k}(1 + \alpha^2) + 2B_{2k}\alpha] / D',$$

$$B'_{2k} = (\alpha^2 - \alpha B_{1k} + B_{2k}) / D',$$

$$D' = 1 - \alpha B_{1k} + \alpha^2 B_{2k}.$$

A-8. BAND-PASS TRANSFORMATION

A low-pass digital filter of cutoff frequency β is first designed for the desired order and type. The cutoff frequency equals the bandwidth of the desired band-pass filter, $F_2 - F_1$, where F_2 and F_1 are the upper and lower cutoff frequencies (in hertz), respectively.

APPENDIX A

A substitution for z^{-1} in the low-pass transfer function results in the transfer function of the desired band-pass filter.

In general, this transformation is^{1,2}

$$z^{-1} \rightarrow - \frac{z^{-2} - \frac{2\alpha k}{k+1} z^{-1} + \frac{k-1}{k+1}}{\frac{k-1}{k+1} z^{-2} - \frac{2\alpha k}{k+1} z^{-1} + 1},$$

where

$$\alpha = \frac{\cos \pi (F_1 + F_2)T}{\cos \pi (F_2 - F_1)T},$$

$$k = \cot [\pi (F_2 - F_1)T] \tan (\pi \beta T).$$

By letting $k = 1$, then $\beta = F_2 - F_1$, and the transformation is simplified.

$$z^{-1} \rightarrow - z^{-1} \left(\frac{z^{-1} - \alpha}{1 - \alpha z^{-1}} \right).$$

The resulting band-pass transfer function has the form

$$H_{BP}(z^{-1}) = (1 - z^{-2}) \sum_{k=1}^{n/2} \left(\frac{A'_{11k} z^{-1} + A'_{01k}}{1 + B'_{11k} z^{-1} + B'_{21k} z^{-2}} - \frac{A'_{12k} z^{-1} - A'_{02k}}{1 - B'_{12k} z^{-1} + B'_{22k} z^{-2}} \right)$$

¹A. G. Constantinides, *Spectral Transformations for Digital Filters*, *Proc. IEE*, 117 (August 1970), 1585-1590.

²A. Antoniou, *Digital Filters: Analysis and Design*, McGraw-Hill Book Co., Inc., New York (1979).

APPENDIX A

for n even. For n odd, there is one real pole, and the transfer function is of the form

$$H_{BP}(z^{-1}) = \frac{A_0(1 - z^{-2})}{1 - \alpha(1 - B_1)z^{-1} - B_1z^{-2}} + (1 - z^{-2}) \sum_{k=1}^{(n-1)/2} \left(\frac{A'_{11k}z^{-1} + A'_{01k}}{1 + B'_{11k}z^{-1} + B'_{21k}z^{-2}} - \frac{A'_{12k}z^{-1} - A'_{02k}}{1 - B'_{12k}z^{-1} + B'_{22k}z^{-2}} \right).$$

A-9. BAND-STOP TRANSFORMATION

The procedure for the band-stop transformation is the same as for the band-pass transformation. In general, the transformation is

$$z^{-1} \rightarrow \frac{z^{-2} - \frac{2\alpha}{1+k}z^{-1} + \frac{1-k}{1+k}}{\frac{1-k}{1+k}z^{-2} - \frac{2\alpha}{1+k}z^{-1} + 1},$$

where

$$\alpha = \frac{\cos \pi(F_1 + F_2)T}{\cos \pi(F_2 - F_1)T},$$

$$k = \tan [\pi(F_2 - F_1)T] \tan (\pi\beta T).$$

By letting $k = 1$, then $\beta = F_S/2 - (F_2 - F_1)$, and the transformation is simplified.

$$z^{-1} \rightarrow z^{-1} \left(\frac{z^{-1} - \alpha}{1 - \alpha z^{-1}} \right).$$

APPENDIX A

The resulting band-stop transfer function has the form

$$H_{BS}(z^{-1}) = (1 - 2\alpha z^{-1} + z^{-2}) \sum_{k=1}^{n/2} \left(\frac{A'_{11k} z^{-1} - A'_{01k}}{1 - B'_{11k} z^{-1} + B'_{21k} z^{-2}} - \frac{A'_{12k} z^{-1} + A'_{02k}}{1 + B'_{12k} z^{-1} + B'_{22k} z^{-2}} \right)$$

for n even. For n odd, the transfer function has the form

$$H_{BS}(z^{-1}) = \frac{(1 - 2\alpha z^{-1} + z^{-2}) A_0}{1 - \alpha(1 + B_1) z^{-1} + B_1 z^{-2}} + (1 - 2\alpha z^{-1} + z^{-2}) \sum_{k=1}^{(n-1)/2} \left(\frac{A'_{11k} z^{-1} - A'_{01k}}{1 - B'_{11k} z^{-1} + B'_{21k} z^{-2}} - \frac{A'_{12k} z^{-1} + A'_{02k}}{1 + B'_{12k} z^{-1} + B'_{22k} z^{-2}} \right).$$

A-10. FILTER IMPLEMENTATION

From the z domain general transfer equation

$$H(z^{-1}) = (1 + z^{-1}) \sum_{i=1}^r \frac{A_{0i} + A_{1i} z^{-1}}{1 + B_{1i} z^{-1} + B_{2i} z^{-2}},$$

a time-domain difference equation is obtained. The difference equation is then used to process data samples.

$$Y_{out}(kT) = X(kT) + X[(k-1)T],$$

APPENDIX A

where

$$X(kT) = \sum_{i=1}^r X_i(kT),$$

$$X_i(kT) = A_{0i} Y_{in}(kT) + A_{1i} Y_{in}[(k-1)T]$$

$$-B_{1i} X_i[(k-1)T] - B_{2i} X_i[(k-2)T].$$

APPENDIX B.--FORTRAN IV COMPUTER PROGRAM FOR RECURSIVE DIGITAL FILTERS

CONTENTS

	<u>Page</u>
B-1. MAIN PROGRAM	51
B-2. SUBROUTINE RDATA	52
B-3. SUBROUTINE BUTTER	53
B-4. SUBROUTINE FACTOR	53
B-5. SUBROUTINE CHEB	54
B-6. SUBROUTINE CAUER	55
B-7. SUBROUTINE HIGHP	57
B-8. SUBROUTINE FPLOT	57
B-9. SUBROUTINE BANDP	59
B-10. SUBROUTINE BANDS	60
B-11. SUBROUTINE FILIMP	62
B-12. SUBROUTINE PLTDAT	63

APPENDIX B

The main program and all of the subroutines for recursive digital filters are included in this appendix. The only exceptions are standard library functions and the plotting routine. If a machine other than an IBM is used, it may be necessary to modify the format and data statements.

B-1. MAIN PROGRAM

```

REAL*8 AO(20), A1(20), B1(20), B2(20), PI, A2
REAL*8 AMP
COMPLEX*16 P(20), Z(20)
COMMON FC, FS, EPS1, EPS2, PI, ITYPE, N, ITRANS
COMMON/VDATA/VIN(1000), VOUT(1000), NTIMES
COMMON/TRANS/ F1, F2
COMMON/FILT/WC, W1, W2, AMP, AO, A1, A2, B1, B2, P, Z
C      ITYPE- FILTER- BUTTERWORTH(1), CHEBYSHEV(2), ELLIPTIC(3)
C      N - ORDER OF FILTER, 20 MAX.
C      ITRANS- NONE(0), HP(1), BP(2), BS(3)
C      FC- CUTOFF FREQUENCY
C      FS- SAMPLE FREQUENCY
C      EPS1 - MINIMUM AMPLITUDE IN PASSBAND
C      EPS2 - TRANSITION COEFFICIENT FOR CAUER, 0.95 MAX.
C      F1 - LOWER CUTOFF FREQUENCY, PASS AND STOP FILTERS ONLY
C      F2 - UPPER CUTOFF FREQUENCY, PASS AND STOP FILTERS ONLY
C      NTIMES - NUMBER OF DATA POINTS
C      VIN- INPUT DATA
C      VOUT- OUTPUT DATA
C      PI=4.000*DATAN(1.000)
      CALL RDATA
      WC=2*DTAN(PI*FC/FS)
      W1=PI*F1/FS
      W2=PI*F2/FS
      GO TO (10,20,30), ITYPE
10     CALL BUTTER
      GO TO 40
20     CALL CHEB
      GO TO 40
30     CALL CAUER
40     CALL FACTOR
      CALL FPLT
      JJ=ITRANS+1
      GO TO (100,50,60,70), JJ
50     CALL HIGHP
      GO TO 80

```

APPENDIX B

B-1. MAIN PROGRAM (Cont'd)

```

60  CALL BANDP
    GO TO 80
70  CALL BANDS
80  CALL FPLOT
100 IF (NTIMES.EQ.0) GO TO 110
    CALL FILIMP
    CALL PLTDAT
110 CONTINUE
    STOP
    END

```

B-2. SUBROUTINE RDATA

```

SUBROUTINE RDATA
REAL*8 P1
COMMON FC, FS, EPS1, EPS2, P1, ITYPE, N, ITRANS
COMMON/VDATA/VIN(1000), VOUT(1000),NTIMES
COMMON/TRANS/ F1,F2
READ(5,10) ITYPE, N, ITRANS, FC,FS,EPS1, EPS2
10  FORMAT(3I5, 4E10.3)
    F2=0
    F1=F2
    IF (ITRANS.EQ.0) GO TO 100
    READ(5,20) F1,F2
20  FORMAT(2E10.3)
    READ(5,25)NTIMES
25  FORMAT(15)
    IF (NTIMES.EQ.0) GO TO 50
    JJ=(NTIMES+7)/8
    DO 100 K=1,JJ
        L=(K-1)*8+1
        M=K*8
100  READ(5,30)(VIN(I),I=L,M)
30  FORMAT(8E10.3)
50  CONTINUE
    WRITE(6,45)
45  FORMAT(////,5X5H1TYPE,7X1HN,6X6H1TRANS,9X2HFC,13X2HFS,12X4HEPS1,
11X4HEPS2,12X2HF1,13X2HF2)
    WRITE(6,40) ITYPE, N, ITRANS, FC, FS, EPS1, EPS2, F1, F2
40  FORMAT(/,3(5X15), 6(5XE10.3),////)
    RETURN
    END

```

APPENDIX B

B-3. SUBROUTINE BUTTER

```

SUBROUTINE BUTTER
REAL*8 AO(20), A1(20), B1(20), B2(20), P1, PHI
COMPLEX*16 P(20), Z(20)
COMMON FC, FS, EPS1, EPS2, P1, ITYPE, N, ITRANS
COMMON/FILT/WC, W1, W2, AMP, AO, A1, A2, B1, B2, P, Z
REAL*8 AMP, A2
A=N
K=N-2*INT(N/2.)
DO 20 I=1, N
B=1
IF(K.EQ.0) GO TO 5
PHI=P1*(A+1)/(2.-J+B-1.-J)/A
GO TO 10
5 PH1=P1*(1.0/(2.-J)*A)+(B-1.0)/A*0.5)
10 P(I)= WC*DCMPLX(DCOS(PHI),DSIN(PHI))
20 CONTINUE
AMP=WC**N
RETURN
END

```

B-4. SUBROUTINE FACTOR

```

SUBROUTINE FACTOR
REAL*8 AMP
REAL*8 AO(20), A1(20), B1(20), B2(20), P1, RR, RI, O, AK, BK, A2
COMPLEX*16 P(20), Z(20), R(20), X
COMMON FC, FS, EPS1, EPS2, P1, ITYPE, N, ITRANS
COMMON/FILT/WC, W1, W2, AMP, AO, A1, A2, B1, B2, P, Z
A2=1.000
K= INT((N+1)/2.)
DO 50 I=1, K
X=DCMPLX(1.000, 0.000)
DO 20 J=1, N
IF (J.EQ.1) GO TO 20
X=X*(P(I)-P(J))
20 CONTINUE
R(I)= AMP/X
IF(N.EQ.1)GO TO 30
X=DCMPLX(1.000,0.000)
IF(ITYPE.NE.3)GO TO 50
KK=2*(N/2)
DO 30 J=1, KK
X=X*(P(I)-Z(J))

```

APPENDIX B

B-4. SUBROUTINE FACTOR (Cont'd)

```

30    CONTINUE
      R(I)=R(I)*X
      AMP=AMP*(KK+1-N)
50    CONTINUE
      IF(ITYPE.NE.3)AMP=0.000
      DO 100 I=1,K
        RR=DREAL(R(I))
        RI=DIMAG(R(I))
        AK=-DREAL(P(I))*0.500
        BK= DIMAG(P(I))*0.500
        D=(1.000+ AK)**2+BK**2
        A0(I)=(RR*(1.000+AK) - RI*BK)/D
        A1(I)=-(RR*(1.000-AK)+RI*BK)/D
        B1(I)= -2.000*(1.000-AK**2-BK**2)/D
        B2(I)=((1.000-AK)**2+BK**2)/D
100   CONTINUE
      I=2*K-N
      IF(1.EQ.0)GO TO 110
      A0(K)=A0(K)/2
      B1(K)=B1(K)/2
      A1(K)=0.
      B2(K)=0.
110   RETURN
      END

```

B-5. SUBROUTINE CHEB

```

SUBROUTINE CHEB
COMMON/FILT/WC, M1,M2,AMP,A0,A1,A2, B1, B2, P, Z
COMMON FC, FS, EPS1, EPS2, PI, ITYPE, N, ITRANS
COMPLEX*16 P(20), Z(20)
REAL*8 A0(20), A1(20), B1(20), B2(20)
REAL*8 CHV,SHV,V,J,AMP,PI,A2
EPS1=SQRT(1.0/EPS1**2-1.0)
A2=1.000
A=N
V=DLOG(1.000/EPS1+DSQRT(1.000+1.000/EPS1**2))/A
CHV=(DEXP(V)+DEXP(-V))/2.000
SHV=(DEXP(V)-DEXP(-V))/2.000
JJ=(N+1)/2
DO 50 I=1,N
  U=PI*(2.000*(I+JJ)-1.000)/(2.000*A)
  P(I)=WC+DCMPLX(DSIN(U)*SHV, -DCOS(U)*CHV)

```

APPENDIX B

B-5. SUBROUTINE CHEB (Cont'd)

```

5)  CONTINUE
    K=N-2*JJ
    AMP=1.000
    IF(K.EQ.0)GO TO 90
    JJ=JJ-1
    IF(N.EQ.1)GO TO 80
    DO 75 I=1,JJ
    AMP=AMP*(DREAL(P(I))**2+DIMAG(P(I))**2)
75  CONTINUE
8)  AMP=AMP*DREAL(P(JJ+1))
    GO TO 125
9)  DO 100 I=1,JJ
    AMP=AMP*(DREAL(P(I))**2+DIMAG(P(I))**2)
100 CONTINUE
    AMP=AMP/DSQRT(1.000+EPS1**2)
125 RETURN
    END

```

B-6. SUBROUTINE CAUER

```

SUBROUTINE CAUER
COMMON/FILT/MC, W1,W2,AMP,A0,A1,A2, B1, B2, P, Z
COMMON FC, FS, EPS1, EPS2, P1, ITYPE, N, ITRANS
REAL*8 AMP,Q,A,S0,W,D,V
REAL*8 A0(20), A1(20), B1(20), B2(20), P1,A2
COMPLEX*16 Z(20),P(20)
S0=0.000
W =0.000
Q=(1.000-DBLE(EPS2)**2)**(0.25)
C=0.500*((1.000-Q)/(1.000+Q))
AMP=1.000
Q=Q+2.0*Q**5+15.0*Q**9+150.0*Q**13
A=DBLE(EPS1)
A=DLOG((1.000/A+1.000)/(1.000/A-1.000))/(2.0*N)
D=0.000
DO 10 I=1,100
M=I-1
S0=S0+(-1.000)**M*Q**(M+1)*DSINH((1+M)*A)
IF(M.EQ.50)GO TO 20
10 W=S0
2) DO 30 I=1,100
D=D+(-1.000)**I*Q**(I+1)*DCOSH(2.0*I*A)
IF(D.EQ.W)GO TO 40
30 W=D

```

APPENDIX B

B-6. SUBROUTINE CAUER (Cont'd)

```

40      S0=DABS(2.-J*Q**10.25)*S0/(1.000+2.0*Q)
      C=N
      W=DSQRT((1.000+EPS2*S0**2)*(1.000+S0**2/EPS2))
      IF(N.EQ.1)GO TO 100
      JJ=N/2
      U=(2*JJ+1-N)/2.0
      DO 100 J=1,JJ
      D=0.000
      V=0
      DO 50 J=1,100,2
      M=J-1
      D=(-1.0)**M*Q**((M+J)*DSIN((M+J)*PI*(FLOAT(I)-J)/C)+Q
      M=J+1
      U=(-1.0)**J*Q**((M+J)*DSIN((M+J)*PI*(FLOAT(I)-U)/C)+Q
      IF(D.EQ.V)GO TO 60
50      V=D
60      A=0.000
      V=A
      DO 70 J=1,100,2
      M=J
      V=V+(-1.0)**M*Q**((M+M)*DCOS(2.0*M*PI*(FLOAT(I)-U)/C)
      M=J+1
      V=V+(-1.0)**M*Q**((M+M)*DCOS(2.0*M*PI*(FLOAT(I)-U)/C)
      IF(V.EQ.A)GO TO 80
70      A=V
80      D=2.0*Q**10.25)*D/(1.000+2.0*V)
      V=(1.000-EPS2*Q*D)*(1.000-D*D/EPS2)
      V=DSQRT(V)
      Z(1)=DCMPLX(0.000,1.000/D)*WC
      Z(N+1-1)=DCONJG(Z(1))
      A=1.000+(S0*D)**2
      P(1)=DCMPLX(-S0*V/A,D*W/A)*WC
      P(N+1-1)=DCONJG(P(1))
      AMP=AMP*D*D*((S0*V)**2+(D*W)**2)/A**2
100     CONTINUE
      K=N-2*(N/2)
      IF(K.EQ.0)GO TO 150
      P((N+1)/2)=DCMPLX(-S0*WC,0.000)
      AMP=AMP*S0*WC
      GO TO 200
150     AMP=AMP*EPS1
200     CONTINUE
      RETURN
      END

```

B-7. SUBROUTINE HIGHP

```

SUBROUTINE HIGHP
REAL*8 AO(20), A1(20), B1(20), B2(20), PI
REAL*8 AMP, A2
REAL*8 AP, A00, A11, B11, B22, D
COMMON FC, FS, EPS1, EPS2, PI, ITYPE, N, ITRANS
COMMON/FILT/HC, W1, W2, AMP, A0, A1, A2, B1, B2, P, Z
W3=PI*FC/FS
A2=-1.000
AP=-COS(W1+W3)/COS(W1-W3)
DO 100 K=1,N
D=1.000-B1(K)*AP+B2(K)*AP*AP
A00=(A0(K)-A1(K)*AP)/(1.000-AP)/D
A11=(A0(K)*AP-A1(K))/(1.000-AP)/D
B11=(AP*AP-B1(K)*(1.000*AP*AP)+2.000*B2(K)*AP)/D
B22=(AP*AP-AP*B1(K)+B2(K))/D
A0(K)=A00
A1(K)=A11
B1(K)=B11
B2(K)=B22
100 CONTINUE
RETURN
END

```

B-8. SUBROUTINE FPLOT

```

SUBROUTINE FPLOT
COMMON FC, FS, EPS1, EPS2, PI, ITYPE, N, ITRANS
COMMON/FILT/HC, W1, W2, AMP, A0, A1, A2, B1, B2, P, Z
REAL*8 AMP
REAL*8 AO(20), A1(20), B1(20), B2(20), PI, A2
DIMENSION F(251), HEJMT(251), PHI(251)
DIMENSION XLAB(2), YLAB1(2), YLAB2(2), HEAD(10), SUBH(2)
DATA YLAB2(1), YLAB2(2)/8H PHASE (D,8HEG) /
DATA YLAB1(1), YLAB1(2)/8H AMPLITUDE,8HE /
DATA XLAB(1), XLAB(2)/8H FREQUENCY,8HY (F/FS)/
WRITE(6,800)
JJ=(N+1)/2
DO 805 I=1,JJ
805 WRITE(6,801)A0(I),A1(I),B1(I),B2(I)
WRITE(6,802)AMP,A2
800 FORMAT(16X2HA1,32X2HA1,32X2HB1,32X2HB2,///)
801 FORMAT(1P4(1XQ32.25))

```

APPENDIX B

B-8. SUBROUTINE FPLOT (Cont'd)

```

802  FORMAT(4X6HAMP = ,1P032.25,10X5HA2 = ,0PF4.0)
      JJ=(N+1)/2
      READ(5,10) (HEAD(I),I=1,10)
10   FORMAT(10A8)
      DO 100 I=1,250
        A=1-I
        F(I)=A/249.0
        W=2.0*PI*F(I)
        C=COS(W)
        S=SIN(W)
        PHI(I)=0.
        HEJMT(I)=0.
        DO 50 K=1,JJ
          CN=A0(K)+A1(K)*C
          DN=-A1(K)*S
          CD=1.0+B1(K)*C+B2(K)*(2.0*C*-1.0)
          DD=B1(K)*S+2.0*B2(K)*C*S
          DD=-DD
          EE=CD*CD+DD*DD
          FF=(CN*CD+DN*DD)/EE
          EE=(DN*CD-DD*CN)/EE
          HEJMT(I)=HEJMT(I)+FF
          PHI(I)=PHI(I)+EE
50   CONTINUE
        FF=(1.0D0+A2*C)*HEJMT(I)+S*PHI(I)*A2      +AMP
        EE=(1.0D0+A2*C)*PHI(I)-S*HEJMT(I)*A2
        HEJMT(I)=SQRT(EE*EE+FF*FF)
        PHI(I)=ATAN2(EE,FF)
        PHI(I)=PHI(I)*180.0/PI
100  CONTINUE
      CALL DRAWID(1,4,4,20,0,250,2.0,0.,XLAB,
1      YLAB1,HEAD,SUBH,F,HEJMT)
      F(I)=0.0
      CALL DRAWID(1,4,4,20,0,250,2.0,0.,XLAB,
1      YLAB2,HEAD,SUBH,F,PHI)
      RETURN
      END

```

```

SUBROUTINE BANDP
COMMON/FILT/WC, W1,W2,AMP,A0,A1,A2, B1, B2, P, Z
COMMON FC, FS, EPS1, EPS2, P1, ITYPE, N, ITRANS
REAL*8 A0(20), A1(20), B1(20), B2(20), P1,A2,AMP
COMPLEX*16 Z(20),P(20),PP,Q,R,S,T,U,V
REAL*8 C,D,AL,E,F
A2=0.000
AL=DCOS(DBLE(W1+W2))/DCOS(DBLE(W2-W1))
JJ=N/2
IF(N.EQ.1)GO TO 50
DO 50 J=1,JJ
AMP=AMP+A0(J)
C=B2(J)-B1(J)**2/4.000
IF(C.LE.0.000)GO TO 40
PP=DCMPLX(-B1(J)/2.000,DSQRT(C))
Q=(A0(J)*PP+PP*(A0(J)+A1(J))*PP+DCMPLX(A1(J),0.000))
I/DCMPLX(0.000,2.000*DIMAG(PP))
V=DCMPLX(1.000,0.000)
S=AL*(V+PP)/2.000
R=S+CDSQRT(S*S-PP)
S=S-CDSQRT(S*S-PP)
T=Q*(AL*R-V)/(R-S)
U=Q*(AL*S-V)/(S-R)
C=DREAL(R)
D=DIMAG(R)
E=DREAL(T)
F=DIMAG(T)
F=-2.0*(C+E+D*F)
D=C*C+D*D
C=-2.0*C
E=2.0*E
AMP=AMP+F/D
A0(J)=-F/D
A1(J)=E-F*C/D
B1(J)=C
B2(J)=D
K=(N+1)/2+1
C=DREAL(S)
D=DIMAG(S)
E=DREAL(U)
F=DIMAG(U)
F=-2.0*(C+E+D*F)
D=C*C+D*D
C=-2.0*C
E=2.0*E
AMP=AMP+F/D
A0(K)=-F/D
A1(K)=E-F*C/D
B1(K)=C
B2(K)=D
GO TO 50

```

APPENDIX B

B-9. SUBROUTINE BANDP (Cont'd)

```

40      C=DSQRT(-C)
        D=-B1(I)/2.000+C
        C=-B1(I)/2.000-C
        E=(A0(I)*C+C*(A1(I)+A1(I))*C+A1(I))/6C-D
        F=(A0(I)*D+D*(A1(I)+A1(I))*D+A1(I))/6D-C
        AMP=AMP-E/C-F/D
        A0(I)=E/C
        A1(I)=-AL*E/C
        B1(I)=-AL*(1.000+C)
        B2(I)=C
        K=(N+1)/2+1
        A0(K)=F/D
        A1(K)=-AL*F/D
        B1(K)=-AL*(1.000+D)
        B2(K)=D
50      CONTINUE
        K=N-2*JJ
        IF(K.EQ.0)GO TO 100
        AMP=AMP+A0(N)/B1(N)
        D=B1(N)
        C=A0(N)*(1.000-1.0/D)
        K=(N+1)/2
        A0(K)=C
        A1(K)=-AL*C
        B1(K)=AL*(D-1.000)
        B2(K)=-D
100     N=2*N
        RETURN
        END

```

B-10. SUBROUTINE BANDS

```

SUBROUTINE BANDS
COMMON/FILT/WC, W1,W2,AMP,A0,A1,A2, B1, B2, P, Z
COMMON FC, FS, EPS1, EPS2, PI, ITYPE, N, ITRANS
REAL*8 A0(20), A1(20), B1(20), B2(20), PI,A2,AMP
COMPLEX*16 Z(20),P(20),PP,Q,R,S,T,U,V
REAL*8 C,D,AL,E,F,X,C1,C2
A2=0.000
AL=DCOS(DBLE(W1+W2))/DCOS(DBLE(W2-W1))
JJ=N/2
X=DTAN(DBLE(W2-W1))*DTAN(P)*FC/FS)
C1=2.0*AL/(X+1.000)
C2=(1.000-X)/(X+1.000)

```

APPENDIX B

B-10. SUBROUTINE BANDS (Cont'd)

```

IF(N.EQ.1)GO TO 50
DO 50 I=1,JJ
V=DCMPLX(1.000,0.000)
AMP=AMP+A0(I)
C=B2(I)-B1(I)*2/4.000
IF(C.LE.0.000)GO TO 40
PP=DCMPLX(-B1(I)/2.000,DSQRT(C))
Q=(A0(I)*PP*PP+(A0(I)+A1(I))*PP+DCMPLX(A1(I),0.000))/
1/DCMPLX(0.000,2.000*DIMAG(PP))
Q=Q*C2/(V-PP*C2)
AMP=AMP+2.0*DREAL(Q)
S=C1*(V-PP)/(V-C2*PP)*2.0)
T=(C2*V-PP)/(V-C2*PP)
R=S+CDSQRT(S*S-T)
S=S-CDSQRT(S*S-T)
T=Q*(R*R-C1/C2*2+V/C2)/(R-S)
U=Q*(S*S-C1/C2*S+V/C2)/(S-R)
C=DREAL(R)
D=DIMAG(R)
E=DREAL(T)
F=DIMAG(T)
F=-2.0*(C*E+D*F)
D=C*C+D*D
C=-2.0*C
E=2.0*E
AMP=AMP+F/D
A0(I)=-F/D
A1(I)=E-F*C/D
B1(I)=C
B2(I)=D
K=(N+1)/2+1
C=DREAL(S)
D=DIMAG(S)
E=DREAL(U)
F=DIMAG(U)
F=-2.0*(C*E+D*F)
D=C*C+D*D
C=-2.0*C
E=2.0*E
AMP=AMP+F/D
A0(K)=-F/D
A1(K)=E-F*C/D
B1(K)=C
B2(K)=D
GO TO 50

```

APPENDIX B

B-10. SUBROUTINE BANDS (Cont'd)

```

40  C=DSQRT(1-C)
    D=-B1(1)/2.000+C
    C=-B1(1)/2.000-C
    E=(A0(1)*C*C+(A0(1)+A1(1))*C+A1(1))/(C-D)
    F=(A0(1)*D*D+(A0(1)+A1(1))*D+A1(1))/(D-C)
    AMP=AMP+E/(C2-C)+F/(C2-D)
    A0(1)=E*(C2/(1.000+C2))-1.0/(C2-C)
    A1(1)=-E*C1*(C+C2)/(1.000+C2)**2
    B1(1)=C1*(C-1.000)/(1.000+C2)
    B2(1)=(C2-C)/(1.000+C2)
    K=1+N
    B2(K)=(C2-D)/(1.000+C2)
    B1(K)=C1*(D-1.000)/(1.000+C2)
    A0(K)=F*(C2/(1.000+C2))-1.0/(C2-D)
    A1(K)=-F*C1*(D+C2)/(1.000+C2)**2
50  CONTINUE
    K=N-2*JJ
    IF(K.EQ.0) GO TO 100
    K=(N+1)/2
    AMP=AMP+A0(K)
    D=B1(K)
    C=A0(K)/(1.000+B1(K)*C2)*(1.000-D)
    B2(K)=(C2+D)/(1.000+C2*D)
    B1(K)=-C1*(D+1.000)/(1.000+C2*D)
    AMP=AMP+C/B2(K)
    A0(K)=C*C2-C/B2(K)
    A1(K)=-C1*(C-C*B1(K)/B2(K))
100 N=2*N
    RETURN
    END

```

B-11. SUBROUTINE FILIMP

```

SUBROUTINE FILIMP
COMMON FC, FS, EPS1, EPS2, P1, ITYPE, N, ITRANS
REAL*8 AMP
REAL*8 A0(20), A1(20), B1(20), B2(20), P1, A2
COMMON/VDATA/ VIN(1000), VOUT(1000), NTIMES
COMMON/FILT/ WC, W1, W2, AMP, A0, A1, A2, B1, B2, P, Z
REAL*8 YK(2,20), YSUM1, YSUM2, YTEM
YSUM1=0.0
YSUM2=0.0
JJ=(N+1)/2
DO 10 K=1, JJ

```

APPENDIX B

B-11. SUBROUTINE FILIMP (Cont'd)

```

      YK(2,K)=AO(K)*VIN(1)
      YK(1,K)=AO(K)*VIN(2)+(A1(K)-B1(K)*AO(K))*VIN(1)
      YSUM2=YSUM2+YK(2,K)
      YSUM1=YSUM1+YK(1,K)
10    CONTINUE
      VOUT(1)=YSUM2
      VOUT(2)=YSUM1
      DO 50 J=3,NTIMES
      YSUM2=YSUM1
      YSUM1=0.0
      DO 40 K=1, JJ
      YTEM=AO(K)*VIN(J)+A1(K)*VIN(J-1)
      YK(1,K)=YK(1,K)-B2(K)*YK(2,K)
      YK(2,K)=YK(1,K)
      YK(1,K)=YTEM
      YSUM1=YSUM1+YTEM
40    CONTINUE
      VOUT(J)=YSUM1+YSUM2*A2      +AMP*VIN(J)
50    CONTINUE
      RETURN
      END

```

B-12. SUBROUTINE PLTDAT

```

      SUBROUTINE PLTDAT
      COMMON/VDATA/VIN(1000),VOUT(1000),NTIMES
      COMMON FC,FS
      DIMENSION HEAD(10),XLAB(2),YLAB(2),T(1000)
      DATA XLAB(1),XLAB(2)/8HTIME 6SE,8HCONDS) /
      DATA SUB1,SUB2/8HVIN      ,8HVOUT    /
      DATA YLAB(1),YLAB(2)/8HAMPLTUD,8HE      /
      DO 20 I=1,NTIMES
20    T(I)=(I-1)/FS
      READ(5,10)(HEAD(I),I=1,10)
10    FORMAT(10A8)
      CALL DRAWID(1,4,4,20,2,NTIMES,2.,0.,XLAB,YLAB,HEAD,SUB1,T,VIN)
      READ(5,10)(HEAD(I),I=1,10)
      CALL DRAWID(1,4,4,20,2,NTIMES,2.,0.,XLAB,YLAB,HEAD,SUB2,T,VOUT)
      RETURN
      END

```

DISTRIBUTION

ADMINISTRATOR
DEFENSE TECHNICAL INFORMATION CENTER
ATTN DTIC-DDA (12 COPIES)
CAMERON STATION, BUILDING 5
ALEXANDRIA, VA 22314

COMMANDER
US ARMY RSCH & STD GP (EUR)
ATTN CHIEF, PHYSICS & MATH BRANCH
FPO NEW YORK 09510

COMMANDER
US ARMY MISSILE & MUNITIONS
CENTER & SCHOOL
ATTN ATSK-CTD-F
REDSTONE ARSENAL, AL 35809

DIRECTOR
US ARMY MATERIEL SYSTEMS ANALYSIS
ACTIVITY
ATTN DRXSY-MP
ATTN DRXSY-PO
ABERDEEN PROVING GROUND, MD 21005

DIRECTOR
US ARMY BALLISTIC RESEARCH
LABORATORY
ATTN DRDAR-TSB-S (STINFO)
ATTN DRXER-AM, W. VANANTWERP
ATTN DRSTE-EL
ATTN DRDAR-BLE
ABERDEEN PROVING GROUND, MD 21005

US ARMY ELECTRONICS TECHNOLOGY
AND DEVICES LABORATORY
ATTN DELET-DD
FT MONMOUTH, NJ 07703

HQ, USAF/SAMI
WASHINGTON, DC 20330

TELEDYNE BROWN ENGINEERING
COMMINGS RESEARCH PARK
ATTN DR. MELVIN L. PRICE, MS-44
HUNTSVILLE, AL 35807

DIRECTOR
APMED FORCES RADIOBIOLOGY
RESEARCH INSTITUTE
DEFENSE NUCLEAR AGENCY
NATIONAL NAVAL MEDICAL CENTER
ATTN RESEARCH PROGRAM
COORDINATING OFFICER
BETHESDA, MD 20014

ASSISTANT TO THE SECRETARY OF
DEFENSE
ATOMIC ENERGY
ATTN EXECUTIVE ASSISTANT
WASHINGTON, DC 20301

DIRECTOR
DEFENSE ADVANCED RSCH PROJ AGENCY
ARCHITECT BUILDING
1400 WILSON BLVD
ATTN TIO
ARLINGTON, VA 22204

FEDERAL EMERGENCY MANAGEMENT AGENCY
ATTN JAMES W. KEE
MITIGATION & RESEARCH
WASHINGTON, DC 20472

DIRECTOR
DEFENSE COMMUNICATIONS AGENCY
ATTN CODE C312
ATTN CODE C313
WASHINGTON, DC 20305

DEFENSE COMMUNICATIONS ENGINEERING
CENTER
1860 WIEHLE AVENUE
ATTN CODE R720, C. STANSBERRY
ATTN CODE R123, RSCH LIB
ATTN CODE R400
RESTON, VA 22090

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
ATTN RDS-3A
ATTN RDS-3A4, POMPONIO PLAZA
WASHINGTON, DC 20301

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN DDST, E. E. CONRAD, DEP DIR
SCI & TECH
ATTN RAEV, ELECTRONICS VULNERABILITY
DIV
ATTN TITL, TECHNICAL LIBRARY DIV
ATTN RAEV, EMP EFFECTS DIV
WASHINGTON, DC 20305

COMMANDER
FIELD COMMAND
DEFENSE NUCLEAR AGENCY
ATTN PCPR
ATTN PUSPM, J. SMITH
ATTN FCLMC
KIRKLAND AFB, NM 87115

DIRECTOR
INTERSERVICE NUCLEAR WEAPONS SCHOOL
ATTN TTV
KIRKLAND AFB, NM 87115

JOINT CHIEFS OF STAFF
ATTN J-3
WASHINGTON, DC 20301

DIRECTOR
JOINT STRATEGIC TARGET PLANNING
STAFF, JCS
ATTN JSAS
ATTN JPST
ATTN NFI-STINFO LIBRARY
OFFUTT AFB
OMAHA, NE 68113

CHIEF
LIVERMORE DIVISION, FIELD COMMAND
DNA
LAWRENCE LIVERMORE LABORATORY
PO BOX 808
ATTN PUPPL
LIVERMORE, CA 94550

NATIONAL COMMUNICATIONS SYSTEM
OFFICE OF THE MANAGER
DEPARTMENT OF DEFENSE
ATTN MSG-TS, CHARLES D. BOUSON
WASHINGTON, DC 20305

DIRECTOR
NATIONAL SECURITY AGENCY
DEPARTMENT OF DEFENSE
ATTN R-52, O. VAN GUNTEN
ATTN S232, D. VINCENT
FT GEORGE G. MEAD, MD 20755

UNDER SECRETARY OF DEF FOR RSCH &
ENGRG
DEPARTMENT OF DEFENSE
ATTN G. BARSE
ATTN S&SS (OS)
WASHINGTON, DC 20301

COMMANDER
BMD SYSTEM COMMAND
DEPARTMENT OF THE ARMY
PO BOX 1500
ATTN BMDSC-AOLIB
HUNTSVILLE, AL 35807

COMMANDER
ERADCOM TECHNICAL SUPPORT ACTIVITY
DEPARTMENT OF THE ARMY
ATTN DRDCO-COM-ME, G. GAULE
ATTN TECHNICAL LIBRARY DIV
ATTN DELCS-X, A. COHEN
ATTN DELET-IR, E. HUNTER
FT. MONMOUTH, NJ 07703

COMMANDER
US ARMY ARMOR CENTER
ATTN TECHNICAL LIBRARY
FT KNOX, KY 40121

COMMANDER
US ARMY COMM-ELEC ENGRG INSTAL
AGENCY
ATTN CCC-PRSO-S
ATTN CCC-CEC-SES
FT HUACHUCA, AZ 85613

COMMANDER
US ARMY COMMUNICATIONS COMMAND
ATTN CC-OPS-PD
ATTN CC-OPS-OS
FT HUACHUCA, AZ 85613

COMMANDER
US ARMY COMMUNICATIONS COMMAND
COMBAT DEVELOPMENT DIVISION
ATTN ATSI-10-MD
FT HUACHUCA, AZ 85613

CHIEF
US ARMY COMMUNICATIONS SYS AGENCY
ATTN COM-RD-T, COM-AD-SV
FT MONMOUTH, NJ 07703

PROJECT OFFICER
US ARMY COMMUNICATIONS RES
& DEV COMMAND
ATTN DRCOM-AT
ATTN DECOM-TES-RV1
FT MONMOUTH, NJ 07703

DIVISION ENGINEER
US ARMY ENGINEER DIV, HUNTSVILLE
PO BOX 1600, WEST STATION
ATTN BRIG-EE
ATTN A. T. BOLT
HUNTSVILLE, AL 35807

DISTRIBUTION (Cont'd)

US ARMY INTEL THREAT
ANALYSIS DETACHMENT
ROOM 2201, BLDG A
ARLINGTON HALL STATION
ATTN RM 2200, BLDG A
ARLINGTON, VA 22212

COMMANDER
US ARMY INTELLIGENCE & SEC CMD
ARLINGTON HALL STATION
4000 ARLINGTON BLVD
ATTN TECHNICAL LIBRARY
ATTN TECH INFO FAC
ARLINGTON, VA 22212

COMMANDER
US ARMY MISSILE COMMAND
ATTN DRCEM-PE-EA, WALLACE O. WAGNER
ATTN DRCEM-PE-EG, WILLIAM R. JOHNSON
ATTN DRDMI-TBD
ATTN DRDMI-EAA
REDSTONE ARSENAL, AL 35809

COMMANDER
US ARMY TEST AND EVALUATION COMMAND
ATTN DSTE-EA
ABERDEEN PROVING GROUND, MD 21005

COMMANDER
US ARMY TRAINING AND DOCTRINE
COMMAND
ATTN ATORI-OP-SW
FT MONROE, VA 23651

COMMANDER
WHITE SANDS MISSILE RANGE
DEPARTMENT OF THE ARMY
ATTN STWS-TE-AN, J. OKUMA
WHITE SANDS MISSILE RANGE, NM 88002

OFFICER-IN-CHARGE
CIVIL ENGINEERING LABORATORY
NAVAL CONSTRUCTION BATTALION CENTER
ATTN CODE LOBA (LIBRARY)
ATTN CODE LOBA
PORT HUENEME, CA 93041

COMMANDER
NAVAL AIR SYSTEMS COMMAND
ATTN AIR-350F
WASHINGTON, DC 20360

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
ATTN EME 117-215
WASHINGTON, DC 20360

COMMANDER
NAVAL OCEAN SYSTEMS CENTER
ATTN CODE OIS, C. FLETCHER
ATTN CODE 1240, S. W. LICHMAN
SAN DIEGO, CA 92162

COMMANDING OFFICER
NAVAL ORDNANCE TATION
ATTN STANDARDIZATION DIV
INDIAN HEAD, MD 20640

SUPERINTENDENT (CODE 1424)
NAVAL POSTGRADUATE SCHOOL
ATTN CODE 1424
MONTEREY, CA 93940

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 4104, EMANUEL L. BRANCATO
ATTN CODE 2627, DORIS R. FOLEN
ATTN CODE 6623, RICHARD L. STATLER
ATTN CODE 6624
WASHINGTON, DC 20375

COMMANDER
NAVAL SHIP ENGINEERING CENTER
DEPARTMENT OF THE NAVY
ATTN CODE 6174D2, EDWARD F. DUFFY
WASHINGTON, DC 20362

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN CODE W551RH, RM 130-108
ATTN CODE F32, EDWIN R. RATHBURN
WHITE OAK, SILVER SPRING, MD 20910

COMMANDER
NAVAL SURFACE WEAPONS CENTER
DAHLGREN LABORATORY
ATTN CODE DF-56
DAHLGREN, VA 22448

COMMANDER
NAVAL WEAPONS CENTER
ATTN CODE 533, TECH LIB
CHINA LAKE, CA 93555

COMMANDING OFFICER
NAVAL WEAPONS EVALUATION FACILITY
KIRTLAND AIR FORCE BASE
ATTN CODE AT-6
ALBUQUERQUE, NM 87117
OFFICE OF NAVAL RESEARCH
ATTN CODE 427
ARLINGTON, VA 22217

DIRECTOR
STRATEGIC SYSTEMS PROJECT OFFICE
NAVY DEPARTMENT
ATTN NSP-2701, JOHN W. FITSBERGER
ATTN NSP-2342, RICHARD L. COLEMAN
ATTN NSP-43, TECH LIB
ATTN NSP-27344
ATTN NSP-230, D. GILL
WASHINGTON, DC 20376

COMMANDER
AERONAUTICAL SYSTEMS DIVISION, AFSC
ATTN ASD-VI-EX
ATTN ENETV
WRIGHT-PATTERSON AFB, OH 45433

AIR FORCE TECHNICAL APPLICATIONS
CENTER
ATTN TEC, M. SCHNEIDER
PATRICK AFB, FL 32925

AF WEAPON LABORATORY, AFSC
ATTN NTN
ATTN NT
ATTN EL, CARL E. BAUM
ATTN ELY
ATTN SUL
ATTN CA
ATTN EIA, J. P. CASTILLON
ATTN ELI
ATTN ELI, W. PAGE
ATTN NS-
KIRTLAND AFB, NM 87117

DIRECTOR
AIR UNIVERSITY LIBRARY
DEPARTMENT OF THE AIR FORCE
ATTN AUL-LSE-70-250
MAXWELL AFB, AL 36112

HEADQUARTERS
ELECTRONIC SYSTEMS DIVISION/YSEA
DEPARTMENT OF THE AIR FORCE
ATTN YSEA
HANSCOM AFB, MA 01731

COMMANDER
FOREIGN TECHNOLOGY DIVISION, AFSC
ATTN NICT LIBRARY
ATTN ETDF, H. L. BALLARD
WRIGHT-PATTERSON AFB, OH 45433

COMMANDER
OGDEN ALAMMETH
DEPARTMENT OF THE AIR FORCE
ATTN OX-ALAMMETH, P. W. BERTHEL
ATTN MMED, LEO KIDMAN
ATTN MAJ R. BLACKBURN
HILL AFB, UT 84406

COMMANDER
ROME AIR DEVELOPMENT CENTER, AFSC
ATTN TSLD
GRIFFINS AFB, NY 13441

COMMANDER
SACRAMENTO AIR LOGISTICS CENTER
DEPARTMENT OF THE AIR FORCE
ATTN MMRS, H. A. DELMASTRO
ATTN MMRA, J. W. DEMES
ATTN MMSRM, F. R. SPEAR
MCLELLAN AFB, CA 95052

SAMSO LIN
AIR FORCE SYSTEMS COMMAND
PO BOX 92960
WORLDWAY POSTAL CENTER
(INTELLIGENCE)
ATTN IND
LOS ANGELES, CA 90009

SAMSO MN
AIR FORCE SYSTEMS COMMAND
(MINUTEMAN)
ATTN MNMH, MAJ M. BARAN
ATTN MNMH, CAPT R. L. LAWRENCE
NORTH AFB, CA 93404

SAMSO VA
AIR FORCE SYSTEMS COMMAND
PO BOX 92960
WORLDWAY POSTAL CENTER
ATTN VAV
LOS ANGELES, CA 90009

STRATEGIC AIR COMMAND XEBS
ATTN NRI-STRINGS LIBRARY
ATTN DEL
ATTN GARNET E. MATTHE
ATTN XFE, MAJ BRIAN G. STEPHAN
OFFUTT AFB, NE 68113

DEPARTMENT OF ENERGY
ALBUQUERQUE OPERATING OFFICE
PO BOX 8400
ATTN TECH LIBRARY
ATTN OPERATIONAL SAFETY DIV
ALBUQUERQUE, NM 87115

DISTRIBUTION (Cont'd)

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
PO BOX 808
ATTN TECH INFO DEPT
ATTN L-06, T. DONICH
ATTN L-545, D. MEEKER
ATTN L-156, E. MILLER
ATTN L-10, H. KRUGER
ATTN H. S. CAPAYAN
LIVERMORE, CA 94550

LOS ALAMOS SCIENTIFIC LABORATORY
PO BOX 1663
ATTN BRUCE W. NOEL
ATTN CLARENCE BENTON
LOS ALAMOS, NM 87545

SANDIA LABORATORIES
PO BOX 5800
ATTN C. N. VITTIENE
ATTN R. L. PARKER
ATTN ELMER F. HARTMAN
ALBUQUERQUE, NM 87115

CENTRAL INTELLIGENCE AGENCY
ATTN RDS1, RM 5648, HQ, BLDG
(OST/NEO/MWB)
WASHINGTON, DC 20505

ADMINISTRATOR
DEFENSE ELECTRIC POWER ADMIN
DEPARTMENT OF THE INTERIOR
INTERIOR SOUTH BLDG, 312
ATTN L. O'NEILL
WASHINGTON, DC 20240

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
HEADQUARTERS SEC DIV, ASF-300
800 INDEPENDENCE AVENUE, SW
ATTN SEC DIV ASF-300
WASHINGTON, DC 20591

AEROSPACE CORPORATION
PO BOX 42957
ATTN C. R. PEARLSTON
ATTN IRVING M. GARFUNKEL
ATTN JULIAN REINHIMER
ATTN LIBRARY
ATTN CHARLES GREENHOW
LOS ANGELES, CA 90009

AGARIAN ASSOCIATES
250 NORTH BASH STREET
ATTN LIBRARY
EL SEGUNDO, CA 90245

AWO RESEARCH & SYSTEMS GROUP
201 LAWELL STREET
WILMINGTON, MA 01802

BATTLE MEMORIAL INSTITUTE
505 KING AVENUE
ATTN ROBERT H. BLAZER
ATTN EUGENE W. LEACH
COLUMBUS, OH 43201

BDM CORPORATION
7405 JONES BRANCH DRIVE
ATTN CORPORATE LIBRARY
MELAN, VA 22102

BDM CORPORATION
PO BOX 9274
ALBUQUERQUE INTERNATIONAL
ATTN LIB
ALBUQUERQUE, NM 87119

BENDIX CORPORATION
RESEARCH LABORATORIES DIVISION
BENDIX CENTER
ATTN MAX FRANK
SOUTHFIELD, MI 48075

BENDIX CORPORATION
NAVIGATION AND CONTROL GROUP
ATTN DEPT 6401
TETERBORO, NJ 07608

BOEING COMPANY
PO BOX 3707
ATTN HOWARD W. WICKLEIN
ATTN D. E. ISHELL
ATTN DAVID KEMLE
ATTN R. C. HANRAHAN
ATTN KENT TECH LIB
SEATTLE, WA 98124

BROWN ENGINEERING COMPANY, INC.
CUMMINGS RESEARCH PARK
ATTN FRED LEONARD
HUNTSVILLE, AL 35807

BURROUGHS CORPORATION
FEDERAL AND SPECIAL SYSTEMS GROUP
CENTRAL AVE AND ROUTE 252
PO BOX 517
ATTN ANGELO J. MAURIELLO
PAOLI, PA 19307

CALSPAN CORPORATION
PO BOX 400
ATTN TECH LIBRARY
ROCHESTER, NY 14726

CHARLES STARK DRAPER LABORATORY,
INC.
555 TECHNOLOGY SQUARE
ATTN KENNETH FERTIG
ATTN TIM MS 74
CAMBRIDGE, MA 02139

CINCINNATI ELECTRONICS CORPORATION
2630 GLENDALE - MILLSIDE ROAD
ATTN LOIS HAMMOND
CINCINNATI, OH 45241

COMPUTER SCIENCES CORPORATION
6565 ARLINGTON BLVD
ATTN RAMONA BRIGGS
FALLS CHURCH, VA 22046

COMPUTER SCIENCES CORPORATION
1400 SAN MATHO BLVD, SE
ATTN RICHARD H. FICKHAUT
ATTN ALVIN CHIFF
ALBUQUERQUE, NM 87106

CONTROL DATA CORPORATION
PO BOX 0
ATTN JACK MEEHAN
MINNEAPOLIS, MN 55440

CUTLER-HAMMER, INC.
ALL DIVISION
COMAC ROAD
ATTN EDWARD KARTEN
DEER PARK, NY 11729

DIKWOOD CORPORATION
1613 UNIVERSITY BLVD, NE
ATTN TECH LIB
ATTN L. WAYNE DAVIS
ALBUQUERQUE, NM 87102

DIKWOOD CORPORATION
2716 OCEAN & PARK BLVD, SUITE 3000
ATTN K. LEE
SANTA MONICA, CA 90405

E-SYSTEMS, INC.
GREENVILLE DIVISION
PO BOX 1056
ATTN JOLETA MOORE
GREENVILLE, TX 75401

EFFECTS TECHNOLOGY, INC.
5383 HOLLISTER AVENUE
ATTN S. CLAW
SANTA BARBARA, CA 93111

EGG WASHINGTON ANALYTICAL SERVICES
CENTER, INC.
PO BOX 10218
ATTN C. GILES
ALBUQUERQUE, NM 87114

EXXON NUCLEAR COMPANY, INC.
RESEARCH AND TECHNOLOGY CENTER
2955 GEORGE WASHINGTON WAY
ATTN DR. A. W. TRIVETT
RICHLAND, WA 99352

FAIRCHILD CAMERA AND INSTRUMENT CO.
464 ELIS STREET
ATTN DAVID K. MYERS
MOUNTAIN VIEW, CA 94040

FORD AEROSPACE & COMMUNICATIONS CORP
3000 FABIAN WAY
ATTN TECHNICAL LIBRARY
FALLS CHURCH, VA 22034

FORD AEROSPACE & COMMUNICATIONS
CORPORATION
FORD & JAMBOREE BOULEVARD
ATTN KEN M. ATTINGER
ATTN E. S. DONNELLY, JR.
NEW BRITAIN, CT 06053

FRANKLIN INSTITUTE
2000 DEPT AVE PARKWAY
ATTN RAMD B. THOMAS JR
PHILADELPHIA, PA 19104

DISTRIBUTION (Cont'd)

GENERAL DYNAMICS CORP
ELECTRONICS DIVISION
PO BOX 81125
ATTN RSCH LIB
SAN DIEGO, CA 92138

GENERAL DYNAMICS CORPORATION
INTER-DIVISION RESEARCH LIBRARY
KEARNY MESA
PO BOX 80847
ATTN RESEARCH LIBRARY
SAN DIEGO, CA 98123

GENERAL ELECTRIC CO.-TEMPO
CENTER FOR ADVANCED STUDIES
816 STATE STREET (PO DRAWER QQ)
ATTN DASIA
ATTN ROYDEN R. RUTHERFORD
ATTN WILLIAM MCNAMERA
SANTA BARBARA, CA 93102

GENERAL ELECTRIC COMPANY
AEROSPACE ELECTRONICS SYSTEMS
FRENCH ROAD
ATTN CHARLES M. HEWISON
UTICA, NY 13503

GENERAL ELECTRIC COMPANY
PO BOX 5000
ATTN TECH LIB
HINGHAMTON, NY 13902

GENERAL ELECTRIC CO.-TEMPO
ALEXANDRIA OFFICE
HUNTINGTON BUILDING, SUITE 300
2560 HUNTINGTON AVENUE
ATTN DASIA
ALEXANDRIA, VA 22303

GENERAL RESEARCH CORPORATION
SANTA BARBARA DIVISION
PO BOX 6770
ATTN TECH INFO OFFICE
SANTA BARBARA, CA 93111

GEORGIA INSTITUTE OF TECHNOLOGY
GEORGIA TECH RESEARCH INSTITUTE
ATTN R. CURRY
ATLANTA, GA 30332

GEORGIA INSTITUTE OF TECHNOLOGY
OFFICE OF CONTRACT ADMINISTRATION
ATTN RSCH SECURITY COORDINATOR
FOR HUGH DENNY
ATLANTA, GA 30332

GRUMMAN AEROSPACE CORPORATION
SOUTH OYSTER BAY ROAD
ATTN L-01 35
BETHPAGE, NY 11714

GTE SYLVANIA, INC
ELECTRONICS SYSTEMS GRP-EASTERN DIV
77 A STREET
ATTN CHARLES A. THORNHILL, LIBRARIAN
ATTN LEONARD L. BLAISDELL
NEEDHAM, MA 02194

GTE SYLVANIA, INC
189 B. STREET
ATTN CHARLES H. RAMSBOTTOM
ATTN DAVID D. FLOOD
ATTN EMIL P. MOTCHOK
ATTN H & V GROUP, MARIO A. NUREFORA
ATTN J. WALDRON
NEEDHAM HEIGHTS, MA 02194

HARRIS CORPORATION
HARRIS SEMICONDUCTOR DIVISION
PO BOX 883
ATTN V PRES & MGR PRQMS DIV
MELBOURNE, FL 32901

HAZELTINE CORPORATION
PULASKI ROAD
ATTN TECH INFO CTR, M. WAITE
GREENLAWN, NY 11740

HONEYWELL INCORPORATED
AVIONICS DIVISION
2600 RIDGEWAY PARKWAY
ATTN S&RC LIB
ATTN RONALD R. JOHNSON
MINNEAPOLIS, MN 55413

HONEYWELL INCORPORATED
AVIONICS DIVISION
13350 U.S. HIGHWAY 19 NORTH
ATTN MS 725-5, STACEY H. GRAFF
ATTN W. E. STEWART
ST PETERSBURG, FL 33733

HUGHES AIRCRAFT COMPANY
CENTINELA AND TEALE
ATTN JOHN B. SINGLETARY
ATTN CTR 6/E110
ATTN KENNETH P. WALKER
CULVER CITY, CA 90230

IIT RESEARCH INSTITUTE
ELECTROMAG COMPATABILITY ANAL CTR
NORTH SEVERN
ATTN ACOAT
ANNAPOLIS, MD 21402

IIT RESEARCH INSTITUTE
10 WEST 35TH STREET
ATTN IRVING N. MINDEL
ATTN JACK E. BRIDGES
CHICAGO, IL 60616

INSTITUTE FOR DEFENSE ANALYSIS
400 ARMY-NAVY DRIVE
ATTN TECH INFO SERVICES
ARLINGTON, VA 22202

INTL TEL & TELEGRAPH CORPORATION
500 WASHINGTON AVENUE
ATTN TECHNICAL LIBRARY
ATTN ALEXANDER T. RICHARDSON
NUTLEY, NJ 07110

IRT CORPORATION
PO BOX 81087
ATTN C. B. WILLIAMS
ATTN DENNIS SWIFT
SAN DIEGO, CA 92148

JAYCOR
11011 TORREYANA ROAD
PO BOX 85154
ATTN ERIC P. WENAAS
ATTN RALPH H. STAHL
SAN DIEGO, CA 92138

JAYCOR
205 S. WHITTING STREET, SUITE 500
ATTN LIB
ALEXANDRIA, VA 22304

KAMAN SCIENCES CORPORATION
1500 GARDEN OF THE GODS ROAD
ATTN ALBERT P. BRIDGES
ATTN W. FOSTER RICH
ATTN WALTER E. WARE
ATTN FRANK H. SHELTON
ATTN JERRY I. LUBELL
ATTN PHIL TRACY
COLORADO SPRINGS, CO 80907

LITTON SYSTEMS, INC
DATA SYSTEMS DIVISION
8000 WOODLEY AVENUE
ATTN EMC GP
ATTN M848-61
VAN NUYS, CA 91409

LITTON SYSTEMS, INC
AMERCOM DIVISION
5115 CALVERT ROAD
ATTN J. SKAGGS
COLLEGE PARK, MD 20740

LOCKHEED MISSILES AND SPACE CO., INC
PO BOX 504
ATTN L. ROSS
ATTN SAMUEL L. TAIMITY
ATTN H. E. THAYN
ATTN GEORGE F. HEATH
ATTN BENJAMIN T. KIMURA
SUNNYVALE, CA 94086

LOCKHEED MISSILE AND SPACE COMPANY,
INC
3251 HANOVER STREET
ATTN TECH INFO CTR D COLL
PALO ALTO, CA 94304

M.I.T. LINCOLN LABORATORY
PO BOX 73
ATTN LEONA LORSHLIN
LEXINGTON, MA 02173
MARTIN MARIETTA CORPORATION
ORLANDO DIVISION
PO BOX 5807
ATTN MONA C. BRIDGITH
ORLANDO, FL 32805

McDONNELL DOUGLAS CORPORATION
PO BOX 516
ATTN T.M. ENGER
ST. LOUIS, MO 63166

McDONNELL DOUGLAS CORPORATION
5401 BOLESA AVENUE
ATTN STANLEY SCHNEIDER
ATTN TECH LIBRARY SERVICE
HUNTINGTON BEACH, CA 92647

DISTRIBUTION (Continued)

MISSION RESEARCH CORPORATION
PO BOX 711
ATTN EMF GROUP
ATTN WILLIAM L. HART
ATTN C. L. NEMINE
SANTA BARBARA, CA 93101

MISSION RESEARCH CORPORATION
PO BOX 9816
ATTN WERNER STARK
ATTN RAY STRAYER, JR
COLORADO SPRINGS, CO 80901

MISSION RESEARCH CORPORATION
EM SYSTEM APPLICATIONS DIVISION
1400 SAN MATEO BLVD, SE, SUITE A
ATTN DAVID E. MEREWETHER
ALBUQUERQUE, NM 87108

MISSION RESEARCH CORPORATION-
SAN DIEGO
PO BOX 1209
ATTN V. A. J. VAN LINT
LA JOLLA, CA 92038

MILITE CORPORATION
PO BOX 208
ATTN M. P. FITZGERALD
BOSTON, MA 01730

NORDEN SYSTEMS, INC
HELEN STREET
ATTN TECHNICAL LIBRARY
NEWARK, CT 06856

NORTHEAST RESEARCH TECHNOLOGY CENTER
ONE RESEARCH PARK
ATTN LIBRARY
VALLEY VIEW, PENN. PA 19384

NORTHEAST CORPORATION
ELECTRONIC DIVISION
240 WEST 120TH STREET
ATTN LEW SMITH
ATTN RAL EFFECTS GRP
HAWTHORNE, CA 90230

PHYSICS INTERNATIONAL COMPANY
2700 MICHEL STREET
ATTN DOUGLON
SAN LEANERO, CA 94457

RAL ASSOCIATES
PO BOX 9605
ATTN R. CLAY KOPPEL
ATTN CHARLES W.
ATTN RICHARD K. SCHAEFER
ATTN DOUGLON
ATTN M. ROYER
ATTN J. MALDONALD
ATTN J. B. BARNETT
MARINA DEL REY, CA 90291

RAND CORPORATION
170 MAIN STREET
ATTN TIRAD
ATTN W. GILFELLY
SANTA MONICA, CA 90406

RAYTHEON COMPANY
HARDWELL ROAD
ATTN JACQUES H. BARNET
REDFORD, MA 01861

RAYTHEON COMPANY
528 BOSTON POST ROAD
ATTN HAROLD L. FLEISHER
SUDBURY, MA 01776

RCA CORPORATION
GOVERNMENT SYSTEMS DIVISION
ASTRO ELECTRONICS
PO BOX 800, LOCUST CORNER
EAST WINDSOR TOWNSHIP
ATTN GEORGE J. BRUCKER
PRINCETON, NJ 08540

RCA CORPORATION
DAVID SARNOFF RESEARCH CENTER
PO BOX 432
ATTN SECURITY DEPT. L. MINICH
PRINCETON, NJ 08540

RCA CORPORATION
CAMDEN COMPLEX
FRONT & COOPER STREETS
ATTN OLIVE WHITEHEAD
ATTN R. W. ROSTROM
CAMDEN, NJ 08002

ROCKWELL INTERNATIONAL CORP
PO BOX 3105
ATTN M. J. RUDLE
ATTN J. L. MONROE
ATTN V. J. MICHEL
ATTN D-243-068, 031-CA31
ANAHEIM, CA 92803

ROCKWELL INTERNATIONAL CORP
SPACE DIVISION
12214 SOUTH LAKEWOOD BOULEVARD
ATTN R. E. WHITE
DOWNEY, CA 90241

ROCKWELL INTERNATIONAL CORPORATION
815 LAHAM STREET
ATTN R-1, DIV TIR (BA-9)
EL SEGUNDO, CA 90245

ROCKWELL INTERNATIONAL CORPORATION
PO BOX 369
ATTN F. A. SHAW
CLEARFIELD, UT 84015

SANIER ASSOCIATES, INC
45 CANAL STREET
ATTN 1-0276, R. C. DEATHY, JR
NASHUA, NH 03060

SCIENCE APPLICATIONS, INC
PO BOX 227
ATTN DEERLOCK M. TEEDE
DEERLEY, VA 24101

SCIENCE APPLICATIONS, INC
PO BOX 2451
ATTN R. PARKINS
LA JOLLA, CA 92038

SCIENCE APPLICATIONS, INC
HUNTSVILLE DIVISION
2700 W. CLINTON AVENUE
SUITE 300
ATTN MEL F. ROSEN
HUNTSVILLE, AL 35895

SCIENCE APPLICATIONS, INC
8400 WESTPARK DRIVE
ATTN WILLIAM L. DUNCAN
MULLEN, VA 22117

SINGER COMPANY
3150 WESTRIDGE AVENUE
ATTN TECH INFO CTR
LITTLE FALLS, NJ 07424

SPEKRY RAND CORPORATION
SPEKRY MICROWAVE ELECTRONICS
PO BOX 4646
ATTN MARGARET E. BERT
CLEARWATER, FL 34615

SPEKRY RAND CORPORATION
SPEKRY DIVISION
MARKUS AVENUE
ATTN TECH LIB
GREAT NECK, NY 11020

SPEKRY RAND CORPORATION
SPEKRY FLIGHT SYSTEMS
PO BOX 20111
ATTN L. ANDREW ARROW
PHOENIX, AZ 85066

SPINER CORPORATION
PO BOX 10
ATTN JOHN K. ALUM
ATTN ROBERT G. LITTLE
BIRMINGHAM, MA 01730

SRI INTERNATIONAL
444 RAVENSWOOD AVENUE
ATTN ARTHUR LEE WHITTON
MEND PARK, CA 94705

SYSTEMS, SCIENCE AND SOFTWARE, INC
PO BOX 1627
ATTN ANDREW E. WILSON
LA JOLLA, CA 92038

TEXAS INSTRUMENTS, INC
PO BOX 6015
ATTN TECH LIB
ATTN DONALD J. MANIS
DALLAS, TX 75265

TOW DEFENSE & SPACE SYSTEMS
ONE PLAZA PARK
ATTN R. E. ADAMS
ATTN R. E. FLENNOR
ATTN L. E. MANNING
ATTN R. E. DEERLEY
ATTN W. JAGGAR
BIRMINGHAM, AL 35202

TEXAS TECH SYSTEMS
PO BOX 9441 NORTH COTTON STATION
ATTN TRAVIS L. SIMMONS
DALLAS, TX 75247

UNITE TECHNOLOGICAL
HAMILTON STANDARD DIVISION
BRANDY INTERNATIONAL AIRPORT
ATTN GUY E. DEERLEY
WINDSOR, ONT. L9A 9G9

DISTRIBUTION (Cont'd)

WESTINGHOUSE ELECTRIC CORPORATION
ADVANCED ENERGY SYSTEMS DIV
PO BOX 10864
ATTN TECH LIB
PITTSBURGH, PA 15236

US ARMY ELECTRONICS RESEARCH
& DEVELOPMENT COMMAND
ATTN TECHNICAL DIRECTOR, DRDEL-CT
ATTN LEGAL OFFICE, 97000
ATTN R. HARMON, DRDEL-MA

HARVEY DIAMOND LABORATORIES
ATTN CHIEF, DIVISION DIRECTORS
ATTN RECORD COPY, 81200
ATTN HDL LIBRARY, 81100 (3 COPIES)
ATTN HDL LIBRARY, 81100 (WOODBRIDGE)
ATTN TECHNICAL REPORTS BRANCH, 81300
ATTN CHAIRMAN, EDITORIAL COMMITTEE
ATTN CHIEF, 21000
ATTN CHIEF, 21100
ATTN CHIEF, 21200
ATTN CHIEF, 21300 (5 COPIES)
ATTN CHIEF, 21400
ATTN CHIEF, 21500
ATTN CHIEF, 22000
ATTN CHIEF, 22100
ATTN CHIEF, 22300
ATTN CHIEF, 22800
ATTN CHIEF, 22900
ATTN CHIEF, 20240
ATTN WIMENITZ, E., 20240
ATTN BUTTLIN, G., 22900
ATTN CHASE, E., 21100
ATTN VALLIN, J., 22100
ATTN FEMENIAS, R., 22100
ATTN LEBER, K., 22100
ATTN REYER, R., 21300
ATTN LANHAM, C., 00210
ATTN PEPERONE, S., 36000
ATTN CHIEF, 13000
ATTN FENSLER, M., 15300
ATTN LEWIS, D., 15300
ATTN SHREVE, J., 15300
ATTN PIERL, R., 15300
ATTN SEBOL, E., 36200 (5 COPIES)
ATTN BANN, K., 15300
ATTN EMMERMAN, E., 15400
ATTN FEMENIAS, R., 22100
ATTN GRAY, R., 21300 (5 COPIES)