

UNCLASSIFIED

AD 271 584

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


TR-907

CATALOGED BY ASTIA
AS AD No. 271584

**HIDDEN TRANSMITTER LOCATION
BY PULSE ARRIVAL MEASUREMENTS**

Walter J. Brinks

22 March 1961

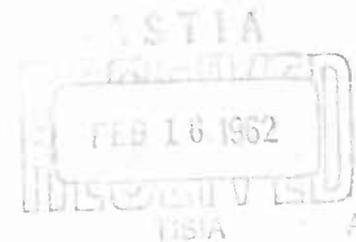

271 584



**DIAMOND ORDNANCE FUZE LABORATORIES
ORDNANCE CORPS • DEPARTMENT OF THE ARMY**

WASHINGTON 25, D. C.

ORDNANCE CORPS
DIAMOND ORDNANCE FUZE LABORATORIES
WASHINGTON 25, D. C.

Robert W. McEvoy, Lt Col
COMMANDING

B. M. Horton
TECHNICAL DIRECTOR

The Diamond Ordnance Fuze Laboratories is a research, development, and engineering installation under the jurisdiction of the Chief of Ordnance.

The Diamond Ordnance Fuze Laboratories was established by the Ordnance Corps, Department of the Army, on 27 September 1953. The nucleus for these Laboratories was the personnel and facilities of the Ordnance Division of the National Bureau of Standards.

Typical fields of activity at the Diamond Ordnance Fuze Laboratories include electronics, physics, mechanics, chemistry, and applied mathematics. Examples of topics under these activities are radiation and field studies, circuit devices, chemical problems, and special electron tube design. The programs include all phases from basic research to product design.

The mission of the Laboratories is to:

1. Conduct research and development in the various physical science and engineering fields directed toward meeting the military characteristics for fuzes and related items.
2. Provide consulting and liaison services as required in connection with the development, production, and use of items developed in the laboratories, or of related items.
3. Fabricate models and prototypes of items under development at the laboratories.
4. Perform developmental testing, including destructive testing of prototypes.
5. Serve as principal Nuclear Radiation Effects Research Group to investigate and determine susceptibility of Ordnance electronic materiel to nuclear weapons radiation environment, mechanisms of those effects, and ways and means of developing less susceptible materiel.
6. Maintain and operate for OCO a special library of technical and progress reports, prepared by Army, Navy, Air Force, and their contractors.
7. Perform the Industrial Engineering Support Mission for all proximity fuze items.
8. Administer the Department of the Army Regional Training Center for the District of Columbia, Virginia, and Maryland region.

**DIAMOND ORDNANCE FUZE LABORATORIES
ORDNANCE CORPS WASHINGTON 25, D. C.**

DA-5U16-01-004
OMS No. 5210.11.14600
DOFL Proj 24700

TR-907

22 March 1961

**HIDDEN TRANSMITTER LOCATION
BY PULSE ARRIVAL MEASUREMENTS**

Walter J. Brinks

**FOR THE COMMANDER:
Approved by**


B. M. Horton
Chief, Laboratory 200



Qualified requesters may obtain copies of this report from ASTIA.

CONTENTS

	Page
ABSTRACT	5
1. THE PROBLEM	5
2. THEORETICAL DISCUSSION AND SOLUTION	5
3. ERROR TREATMENT	8
4. NUMERICAL EXAMPLE	10
ACKNOWLEDGMENT	15

ABSTRACT

A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.

1. THE PROBLEM

The following problem has been proposed in the radiolocation field: Given a radar transmitter in a foreign location tracking a missile, usually a missile of foreign origin, assume that at a receiving point in a friendly location, it is possible to detect the radar pulses reflected from, or transponded by, the missile but it is not possible to hear the transmitter directly. The flight path of the missile is known at the receiver location, usually through friendly optical or radar tracking. The problem is to locate the radar transmitter.

Several assumptions must be made in order to solve this problem: The pulse repetition period T of the radar is taken as constant, although its value need not be known. If the pulse is transponded at the missile, the time delay of the transponder is also taken to be constant.

The location of the transmitter will be deduced from the missile position information together with data giving the time of arrival of the reflected or transponded pulses at the receiver.

2. THEORETICAL DISCUSSION AND SOLUTION

Consider the times of arrival τ_n of the received pulses. The receiver time at which the n th pulseⁿ left the transmitter (fig. 1) is:

$$\tau_n - \left(\frac{H_n}{c} + \delta \right)$$

where H_n = total transmitter-to-missile-to-receiver distance

c = velocity of light

δ = time delay of transponder

($\delta = 0$ for a reflected signal)

Naturally, the missile position used in calculating H_n is that position the missile occupies when the n th pulse is operated upon.

Consider another pulse, the j th pulse; it is clear that it left the transmitter a period of time $(n-j)T$ before the n th pulse, provided $n \geq j$. Therefore

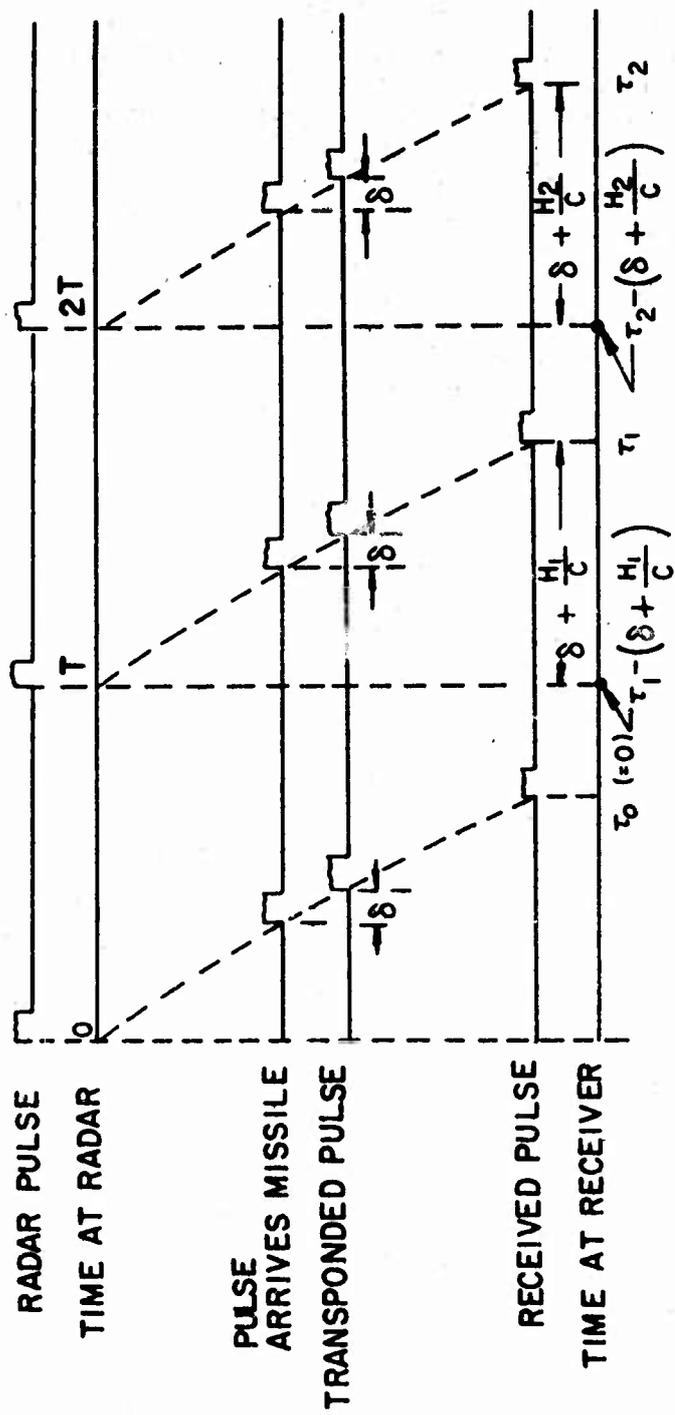


Figure 1. Time disposition of transmitted pulses.

$$\left[\tau_n - \left(\frac{H_n}{c} + \delta \right) \right] - \left[\tau_j - \left(\frac{H_j}{c} + \delta \right) \right] = (n-j) T$$

Now take two other pulses, m and i, $m > i$, such that $n-j = m-i$. It follows at once that

$$\left\{ \left[\tau_n - \left(\frac{H_n}{c} + \delta \right) \right] - \left[\tau_j - \left(\frac{H_j}{c} + \delta \right) \right] \right\} \\ \left\{ \left[\tau_m - \left(\frac{H_m}{c} + \delta \right) \right] - \left[\tau_i - \left(\frac{H_i}{c} + \delta \right) \right] \right\} = 0$$

After collecting terms, the δ 's drop out

$$c (\tau_n - \tau_j - \tau_m + \tau_i) = H_n - H_j - H_m + H_i$$

Each H, say H_n , consists of two parts: a distance L_n from the receiver to the missile, which is known to the receiver, and a distance r_n from the transmitter to the missile, which is not known at the receiver.

$$H_n = r_n + L_n$$

Using this, we can write

$$c (\tau_n - \tau_j - \tau_m + \tau_i) - L_n + L_j + L_m - L_i = r_n - r_j - r_m + r_i$$

This equation will be called the trace equation, and surfaces or curves in space that satisfy it will be called traces. In this form, the left hand side of the trace equation consists entirely of known quantities. Note that we may choose, if we wish, $j = m$.

Before further discussion, a coordinate system will have to be introduced. Although one might be tempted to choose spherical coordinates because this problem takes place on the earth's surface, the unknown r 's are distances, and the expression for distance is generally simpler in rectangular coordinates. Therefore, three-dimensional rectangular coordinates (X, Y, Z) will be used.

If the location of the transmitter is known approximately, it is advantageous to orient the coordinate system so that the Z coordinate of the transmitter is reduced to zero or very nearly so. That is, the XY plane should cut the surface of the earth near an expected location

of the transmitter. This procedure has the advantage of reducing the problem to a two-dimensional one, which is more tractable, although this simplification is not essential.

A useful suggestion, due to Mr. J. E. Tompkins is first to calculate one or two sets of data on a three-dimensional basis, using an arbitrary orientation of coordinates. These results may then be used to reorient the coordinate system so as to reduce the problem to a two-dimensional one.

Let the receiver be at the origin (0,0,0); the unknown transmitter location will be (α, β, γ) . The numbers (X_n, Y_n, Z_n) will denote the position of the missile when it operates upon the n th pulse. With these conventions, the trace equation becomes

$$c(\tau_n - \tau_j - \tau_m + \tau_i) - L_n + L_j + L_m - L_i = \sqrt{(X-x_n)^2 + (y-Y_n)^2 + (z-Z_n)^2} \\ - \sqrt{(x-X_j)^2 + (y-Y_j)^2 + (z-Z_j)^2} - \sqrt{(x-X_m)^2 + (y-Y_m)^2 + (z-Z_m)^2} \\ + \sqrt{(x-X_i)^2 + (y-Y_i)^2 + (z-Z_i)^2}$$

The trace surfaces (or, in degenerate cases, curves) always contain the point (α, β, γ) , for any choice of n, j, m, i , subject to the condition $n-j = m-i$. Since the surfaces are generally not identical parallel or nested for different choices of the subscripts, then they must intersect. In the case of surfaces, at least three must be used to define a point. In case a few surfaces (or curves) have multiple intersections, then more surfaces must be drawn to eliminate the spurious intersections from the solution. Except probably in the case where the missile path is a straight line, the point (α, β, γ) will normally be the only point of intersection of all the surfaces or curves.

In brief, then, the transmitter is located by finding the simultaneous solution of a set of trace equations. If the physical situation is such that the problem can be studied well enough in two dimensions, all that is required is to graph the real solutions of each trace equation, and select the common intersection point. For a three-dimensional problem, solid or matrix graphs are still a possibility, but a better approach might be to program the set of trace equations on a digital computer.

3. ERROR TREATMENT

It is desirable to estimate the error that will occur when applying this method. Such error will arise from imprecisions in the measurements of times, coordinates, or distances involved. Let σ be any one of the

numerical parameters involved in a given trace equation, and suppose that an estimate of the error of measurement of σ shows that σ lies within the bounds $K \leq \sigma \leq \lambda$. The symbol $\bar{\sigma}$ will denote the mean value (in any sense) of these measurements of the parameter.

In this procedure, the graphical presentation is essential. First, graph, for each trace equation, the surface or curve using the value $\bar{\sigma}$; this will be called the median surface (curve). Now as σ varies from $\bar{\sigma}$, the trace surface deforms continuously in at least the 6-space in which x , y , and z are complex quantities. The new surfaces created by varying σ from $\bar{\sigma}$ will be called the varied surfaces (curves). This smooth variation is due to the fact that the trace equations are continuous functions of all variables and parameters involved. For values of (x,y,z) in the immediate neighborhood of (α, β, γ) , the solution of each trace equation will be wholly real.

Consider any point P on the median surface (curve); the varied surfaces (curves) will generally lie on both sides of the median curve, depending on which way σ varies from $\bar{\sigma}$. Denote the distance at P to a varied curve by

$$[P - p]$$

and arbitrarily denote the distance on one side of the median curve +, on the other side -. The point p will be the point on the varied surface closest to P .

For each P , there are points $q \in p$, $r \in p$ on the varied surfaces, such that

$$[P - q] = \sup [P - p]$$

$$[P - w] = \inf [P - p]$$

where w and q are found by varying σ within the prescribed limits. A surface is then defined by the q 's and another by the w 's; these surfaces (or curves) are called extreme surfaces. The volume (or area) they enclose will be called the error volume (area) E_k ; the subscript denotes that it was generated from the k th trace equation.

A little thought will now show that the target will lie in the volume (area) A given by

$$A = E_1 \cap E_2 \cap \dots \cap E_w$$

if there were w trace equations employed altogether.

If, instead of only one parameter, several parameters have error tolerances, the principle remains the same. The parameters are varied, singly or in any combination, within the limits of their respective errors, until a q and w are defined for each P , and the extreme surfaces constructed as before.

It will be recognized that the extreme surfaces do not necessarily coincide with any of the varied surfaces. The extreme surfaces are rather to be considered as envelopes; as such, they must satisfy the differential equation of a family of curves, at least as a singular solution. The envelope need not be a member of the family itself.

In concluding the general discussion of the problem, attention should be called to the assumption that the pulse repetition frequency (prf) is constant. Although this point has not been rigidly investigated, it seems reasonable that this requirement can be relaxed somewhat. For example, if the prf jitters around an average value, this will seemingly not lead to any great error over a large number of observations. It is also very likely that, if data be examined over any long time interval during which the prf has a time average, useful results will be obtained, even if the momentary excursions of the prf are large. Even if some error is caused by nonconstancy of the prf, in some applications even imprecise results are better than no information at all.

DISTRIBUTION

Department of the Army
Office of the Chief of Ordnance
The Pentagon, Washington 25, D. C.
Attn: ORDTU (GM Systems Br)
Attn: ORDIZ (GM br of ID)

Commanding General
Army Ballistic Missile Agency
Redstone Arsenal, Alabama
Attn: Technical Documents Library

Commanding General
Army Rocket & Guided Missile Agency
Redstone Arsenal, Alabama
Attn: ORDXRFE

Commanding General
Aberdeen Proving Ground, Maryland
Attn: ORDBG-LM, Tech Library (Bldg 313)—2 copies
Attn: Tech Library, Br No. 3, Bldg 400, D&P Services

Commanding Officer
Picatinny Arsenal
Dover, New Jersey
Attn: Library

Commanding Officer
U.S. Army Signal Research & Development Laboratory
Fort Monmouth, New Jersey
Attn: Tech Library

Commanding General
U.S. Army Electronic Proving Ground
Fort Huachuca, Arizona
Attn: Tech Library

Office of the Ass't Chief of Staff for Intelligence
The Pentagon, Washington 25, D. C.
Attn: Mail & Records Br

Ordnance Technical Intelligence Agency
Arlington Hall Station
Arlington 12, Virginia

Commanding General
Engineer Research & Development Laboratories
U.S. Army
Fort Belvoir, Virginia
Attn: Tech Documents Center

DISTRIBUTION (Cont'd)

Commander
U.S. Naval Ordnance Laboratory
White Oak, Silver Spring 19, Maryland
Attn: Tech Library

Department of the Navy
Bureau of Naval Weapons
Washington 25, D. C.
Attn: DLI-3, Tech Library

Commander
Naval Research Laboratory
Washington 25, D. C.
Attn: Tech Library

Commander
Air Force Ballistic Missile Div (ARDC)
P.O. Box 262
Inglewood, California
Attn: WDSOT (4 copies)

Commander
Armed Services Technical Information Agency
Arlington Hall Station
Arlington 12, Virginia
Attn: TIPDR (10 copies)

National Security Agency
Fort George G. Meade, Maryland
Attn: CREF, Tech Documents Section

Aerospace Technical Intelligence Center
Wright-Patterson Air Force Base,
Dayton, Ohio
Attn: Technical Library

Chief, U.S. Army Security Agency
NSA Operations Building
Ft. Meade, Maryland
Attn: Mr. Mulroony

Commanding General, AOMC
Redstone Arsenal, Huntsville, Alabama
Attn: ORDXM-YP, Carl Duckett

DISTRIBUTION (Cont'd)

Internal

Hinman, W. S., Jr/McEvoy, R. W.
Apstein, M./Gerwin, H. L./Guarino, P. A./Kalmus, H. P.
Fong, L. B. C./Schwenk, C. C.
Hardin, C. D., Lab 100
Horton, B. M., Lab 200
Rotkin, I., Lab 300
Landis, P. E./Tuccinardi, T. E., Lab 400
Hatcher, R. D., Lab 500
Flyer, I. N., Lab 600
Campagna, J. H./Apolenis, C. J., Div 700
DeMasi, R., Div 800
Franklin, P. J./Horsey, E. F., Lab 900
Seaton, J. W., 260
Griffin, P. W., 240
Brinks, W. J., 240 (10 copies)
Wansley, W. S., 240
Tompkins, J. E., 250
Cruzan, O., 250
Pepper, W. H., 260
Technical Reports Unit, 800 (3 copies)
DOFL Library (5 copies)
Technical Information Office, 010 (10 copies)

(Two pages of abstract cards follow.)

<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>1. Radio location</p> <p>2. Direction finding-- Radio</p>	<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>1. Radio location</p> <p>2. Direction finding-- Radio</p>
<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>1. Radio location</p> <p>2. Direction finding-- Radio</p>	<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>1. Radio location</p> <p>2. Direction finding-- Radio</p>

REMOVAL OF EACH CARD WILL BE NOTED ON INSIDE BACK COVER, AND REMOVED CARDS WILL BE TREATED AS REQUIRED BY THEIR SECURITY CLASSIFICATION.

<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>Accession No. _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>	<p>AD _____</p> <p>Diamond Ordnance Fuze Laboratories, Washington 25, D. C.</p> <p>HIDDEN TRANSMITTER LOCATION BY PULSE ARRIVAL MEASUREMENTS - Walter J. Brinks</p> <p>TR-907, 22 March 1961, 9 pp text, 3 pp illus., Department of the Army Proj 5U16-01-004, OMS Code 5210.11.14600, DOFL Proj 24700, UNCLASSIFIED Report</p> <p>A method is presented for determining the location of an uncooperative radar transmitter by timing the pulses of the transmitter after they have been reflected or transduced by a moving target of known location. A procedure is discussed for assessing the errors involved.</p>
--	---	--	---	--	---	--	---	--

REMOVAL OF EACH CARD WILL BE NOTED ON INSIDE BACK COVER, AND REMOVED CARDS WILL BE TREATED AS REQUIRED BY THEIR SECURITY CLASSIFICATION.

UNCLASSIFIED

UNCLASSIFIED