

AD-A045 003

BOLT BERANEK AND NEWMAN INC CAMBRIDGE MASS
THE EFFECTS OF DEVIATE INTERNAL REPRESENTATIONS IN THE OPTIMAL --ETC(U)
JUL 77 S BARON, J E BERLINER

F/G 5/10

UNCLASSIFIED

DRDMI-TD-CR-77-3


NL

1 OF 1
AD
A045 003



END
DATE
FILMED

11-77
DDC

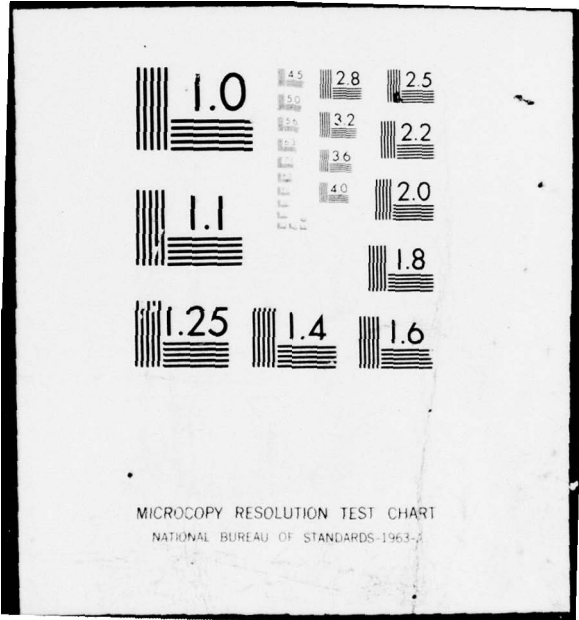

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-2

AD A 045003



**U.S. ARMY
MISSILE
RESEARCH
AND
DEVELOPMENT
COMMAND**



Redstone Arsenal, Alabama 35809

AD NO. _____
DDC FILE COPY

DMI FORM 1000, 1 APR 77

[Handwritten signature] (12)

TECHNICAL REPORT TD-CR-77-3

THE EFFECTS OF DEVIATE INTERNAL REPRESENTATIONS
IN THE OPTIMAL MODEL OF THE HUMAN OPERATOR

*Aeroballistics Directorate
Technology Laboratory*

15 July 1977

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

[Handwritten signature]
DDC
RECEIVED
OCT 21 1977
RECEIVED
B

DISPOSITION INSTRUCTIONS

DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.

DISCLAIMER

THE FINDINGS IN THIS REPORT ARE NOT TO BE CONSTRUED AS AN OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO DESIGNATED BY OTHER AUTHORIZED DOCUMENTS.

TRADE NAMES

USE OF TRADE NAMES OR MANUFACTURERS IN THIS REPORT DOES NOT CONSTITUTE AN OFFICIAL INDORSEMENT OR APPROVAL OF THE USE OF SUCH COMMERCIAL HARDWARE OR SOFTWARE.

17 DRDMI-TD

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 19 TD CR-77-3 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER 9
4. TITLE (and Subtitle) 6 THE EFFECTS OF DEVIATE INTERNAL REPRESENTATIONS IN THE OPTIMAL MODEL OF THE HUMAN OPERATOR. ✓		5. TYPE OF REPORT & PERIOD COVERED Contractor Technical Report
7. AUTHOR(s) 10 Sheldon Baron and Jeffrey E. Berliner		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Bolt Beranek and Newman Inc. 50 Moulton Street Cambridge, Massachusetts 02138 ✓		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS Commander, US Army Missile R&D Command ATTN: DRDMI-TI Redstone Arsenal, Alabama 35809 11		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DA Proj 1L362303A214 AMCMS Code No. 632303.2140511 11705
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Commander, US Army Missile R&D Command ATTN: DRDMI-TDW Redstone Arsenal, Alabama 35809		12. REPORT DATE 15 July 1977 ✓
		13. NUMBER OF PAGES 22 p. ✓
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Control theory Estimation theory Human performance		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report gives some of the issues and equations involved in predicting closed-loop man-machine performance for situations in which the human operators' knowledge of the system and/or environment are imperfect. Several examples to demonstrate some of the effects to be expected when such is the case are then given.		

060100 Jones

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1.	Introduction	1
2.	Equations for Deviate Internal Model	3
3.	Examples	8
4.	Conclusion	17
5.	References	18

ACQUISITION		
NTIS	NTIS Section	<input checked="" type="checkbox"/>
EDC	EDC Section	<input type="checkbox"/>
CRIMINAL JUSTICE	CRIMINAL JUSTICE	<input type="checkbox"/>
JUSTICE		
BY		
DISTRICT		
Dist.		
A		

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1.	Structure of the Optimal Control Model	4
2.	Effects of Deviate Internal Model and High Operator Noise on K/s Regulation	9
3.	Effect of Deviate Internal Model on Regulation of Roll Disturbance.	10
4.	Vehicle Dynamics Approximations for High Performance Roll Dynamics.	12
5.	Effect of Wrong Estimate of Input Bandwidth on K/s Regulation.	14
6.	Effect of Non-Utilization of Rate Information on Roll Regulation	15

1. Introduction

Modern control and estimation theory have been used successfully to develop a model for human performance in continuous control tasks [1]. This model, frequently referred to as the optimal control model of the human operator, has been validated extensively by experimental data and has been applied to a variety of problems. The model incorporates an "internal model" that is an exact replica of the system model as part of a Kalman filter sub-model that represents human information processing. The concept that the human operator builds an internal model of his "universe" (e.g., through training) is not uncommon in psychology. Moreover, the assumption of a perfect internal model appears to be a satisfactory one in many instances, as has been demonstrated by the agreement between model predictions and experimental data.

There are situations, however, in which the assumption of a perfect model does not appear suitable and important applications which would benefit from allowing for an internal model that is different from the system model. For example, naive or untrained trackers may not have "perfect" models even for simpler systems. Tracking of targets executing deterministic but unknown motions requires admitting imperfect internal models (for the input) for complete generality. When a system failure occurs there is a change in the system; until this change is detected and the failed system identified the operator's model is different than the system model.

In this note, some of the issues and equations involved in predicting closed-loop man-machine performance for situations in which the human operators' knowledge of the system and/or environment are imperfect are presented and discussed. Several examples to demonstrate some of the effects to be expected when such is the case are then given. Details concerning equation development may be found in [2].

2. Equations for Deviate Internal Model

Let the system to be controlled by the human operator be described by the linear equations

$$\dot{\underline{x}}(t) = \underline{A} \underline{x}(t) + \underline{B} \underline{u}(t) + \underline{E} \underline{w}(t) \quad (1)$$

$$\underline{y}(t) = \underline{C} \underline{x}(t) + \underline{D} \underline{u}(t) \quad (2)$$

where \underline{x} is an n_x dimensional vector of system state variables, \underline{u} is an n_u -dimensional vector of control inputs, \underline{y} is an n_y -dimensional vector of displayed outputs and \underline{w} is an n_w -dimensional vector of a zero-mean, gaussian, white noise process with auto-covariance $E\{\underline{w}(t_1)\underline{w}'(t_2)\} = \underline{W} \delta(t_1-t_2)$. We assume $\underline{w}(t)$ is stationary so that \underline{W} is constant for all t . We will also assume that the matrices in (1) and (2) are constant. Thus, we treat a time-invariant system. Moreover, we will be concerned here only with the steady-state solution.

The optimal control model for the human operator has the structure illustrated in Figure 1. The structure and equations of Figure 1 have been documented in [1]. The blocks in Figure 1 labeled estimator and predictor model human information processing. For these processes to be performed "optimally" it is necessary to have perfect knowledge of the system $\{\underline{A}, \underline{B}, \underline{C}, \underline{D}, \underline{E}\}$, the driving noise-statistics $\{\underline{W}\}$, and the parameters describing human limitations $\{\tau, \underline{T}_n, \underline{V}_y, \underline{V}_m\}$. The control gains, \underline{L}^* , model human control-command generation or compensation and are selected so as to minimize a quadratic cost functional. To achieve a minimum, i.e., to compute \underline{L}^* , it is necessary to know $\underline{A}, \underline{B}$ and the weighting coefficients $(q(\cdot)_i)$. Thus, there are three classes of quantities or parameters (system/environment, own limitations, and cost weightings) that are required to be known by the human operator if he is to perform optimally.

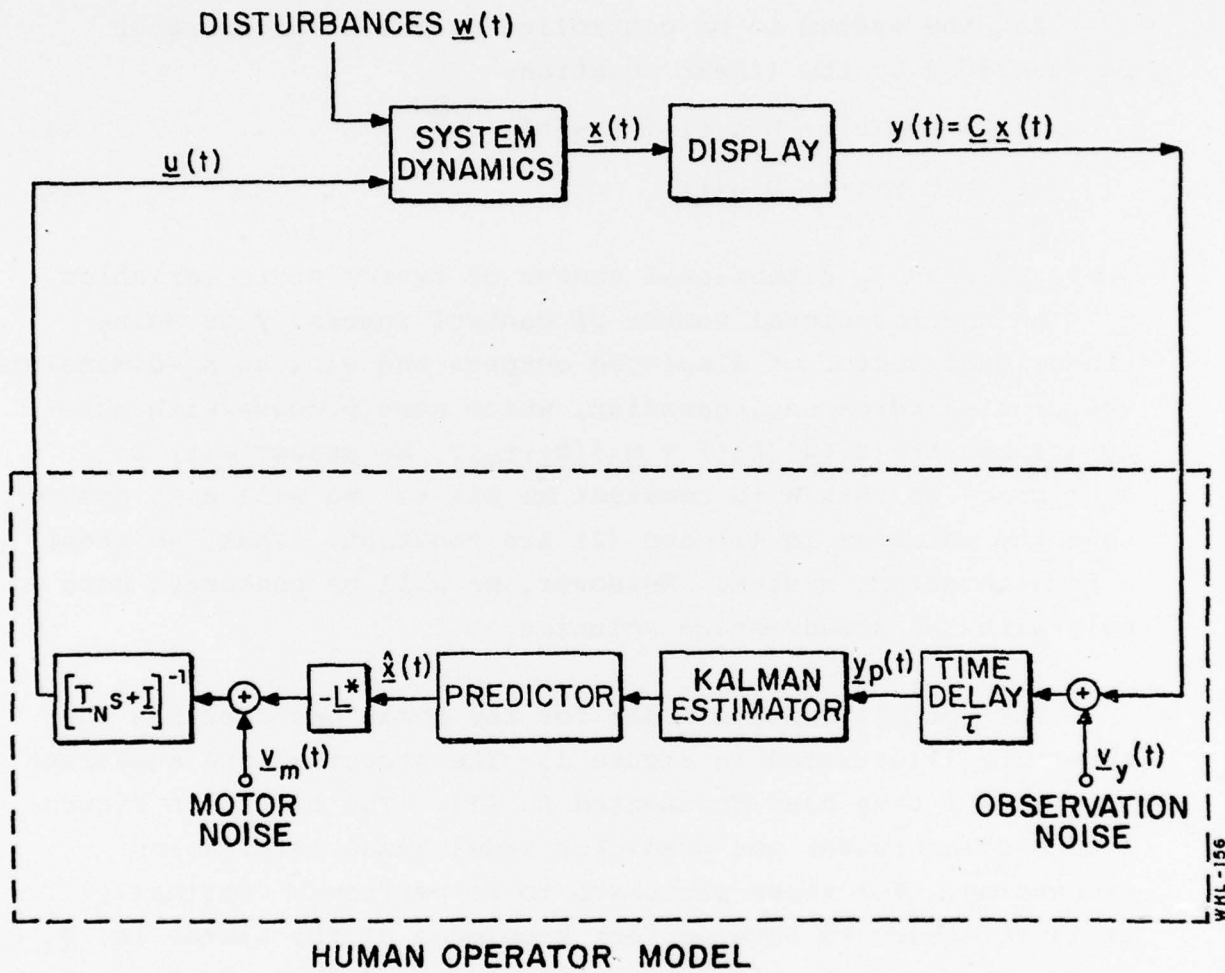


Figure 1. Structure of the Optimal Control Model

There are many assumptions that can be made concerning the human operator's knowledge of the requisite information. At one extreme, one can assume that all quantities are unknown (including the dimensions of the various matrices). At the other end of the spectrum, one can assume that all quantities are known and the human performs optimally. This latter assumption is, of course, the one used in formulating the optimal control model; for trained operators, it seems closer to the truth (or, at least it explains the data better) than the assumption of complete ignorance. Here, for reasons discussed in [2], we assume the human operator knows the cost functional weightings and his own limitations of delay, neuromotor-lag and observation noise. On the other hand, we allow the system matrices to be unknown (even as to dimension) and the motor-noise also to be unknown.

To implement the above assumptions, we assume the human operator's internal model to be

$$\dot{\underline{z}}(t) = \tilde{\underline{A}}_1 \underline{z}(t) + \tilde{\underline{B}}_1 \underline{u}_c(t) + \tilde{\underline{E}}_1 \tilde{\underline{w}}_1(t) \quad (3)$$

$$\underline{y}(t) = \tilde{\underline{C}}_1 \underline{z}(t) \quad (4)$$

$$E\{\tilde{\underline{w}}_1(t_1) \tilde{\underline{w}}_1^T(t_2)\} = \tilde{\underline{W}}_1 \delta(t_1 - t_2) \quad (5)$$

where

$$\begin{aligned} \tilde{\underline{A}}_1 &= \begin{bmatrix} \tilde{\underline{A}} & \tilde{\underline{B}} \\ 0 & -\underline{T}_N \end{bmatrix}, \quad \tilde{\underline{B}}_1 = \begin{bmatrix} 0 \\ \underline{T}_N^{-1} \end{bmatrix}, \quad \underline{C}'_1 = \begin{bmatrix} \underline{C}' \\ \underline{D}' \end{bmatrix} \\ \tilde{\underline{E}}_1 &= \begin{bmatrix} \tilde{\underline{E}} & 0 \\ 0 & \underline{T}_N^{-1} \end{bmatrix}, \quad \underline{W}_1 = \begin{bmatrix} \tilde{\underline{W}} & 0 \\ 0 & \tilde{\underline{V}}_m \end{bmatrix} \end{aligned} \quad (6)$$

where the matrices with "tildes" indicate internal matrices and Equations (1) and (2) have been "augmented" to incorporate the "neuromotor" dynamics (see Fig. 1 and [1]). The perceived variables remain unchanged inasmuch as the "true" \underline{y} is displayed to the operator. The "internal state" \underline{z} does not have to be of the same dimension as \underline{x} . However, we assume that \underline{y} and \underline{u} in the

internal model have the same dimensions as the corresponding vectors of the system.

It is now assumed that the human will perform "optimally" for his internal system. These assumptions lead to a set of coupled delay-differential equations. In the special case, where $\underline{x}_1 = \underline{z}$ and $\underline{\tilde{C}}_1 = \underline{C}_1$, the following equations describing closed-loop performance are obtained [2]

$$\begin{aligned}
 \dot{\underline{e}}(t) &= (\tilde{\underline{A}}_1 - \tilde{\underline{K}} \underline{C}_1) \underline{e}(t) + (\underline{A}_1 - \tilde{\underline{A}}_1) \underline{x}(t-\tau) \\
 &\quad + \underline{E}_1 \underline{w}(t-\tau) - \tilde{\underline{K}} \underline{v}_y(t-\tau) \\
 \dot{\underline{\hat{x}}}(t) &= (\tilde{\underline{A}}_1 - \underline{B}_1 \tilde{\underline{L}}) \underline{\hat{x}}(t) + e^{\tilde{\underline{A}}_1 \tau} \tilde{\underline{K}} \\
 &\quad [\underline{C}_1 \underline{e}(t) + \underline{v}_y(t-\tau)] \\
 \dot{\underline{x}}_1(t) &= \underline{A}_1 \underline{x}_1(t) - \underline{B}_1 \tilde{\underline{L}} \underline{\hat{x}}(t) + \underline{E}_1 \underline{w}(t) .
 \end{aligned} \tag{7}$$

where $\underline{e}(t)$ is the state estimation error and $\tilde{\underline{K}}$ is the Kalman gain for the system described by Equations (3)-(6). Equation (7) is also a "coupled" set of delay-differential equations. Note, however, that if $\tilde{\underline{A}}_1 = \underline{A}_1$ the equation for the error "decouples" from the state equation and the estimation equation. Moreover, the system reduces to a set of ordinary differential equations. Performance computations are thereby simplified enormously requiring evaluation of $n_x \times n_x$ matrices only. This is the case even if $\underline{W}_1 \neq \underline{W}_1$. Unfortunately, the assumptions required to achieve this simplification are too stringent for most considerations.

The delay-differential character of the above equations can be circumvented by approximating the human's delay via a Padé approximation. The delay is then considered part of the system dynamics (except for computation of human describing functions);

it is a part that is assumed known to the human operator so there will be some compensation for the delay. The resulting closed-loop equations are linear and time invariant. However, their stability is not automatically guaranteed as in the case when all matrices are known to the operator; instead, stability depends on the particular internal model selected. The necessary modifications are given in [2].

3. Examples

Incorrect Knowledge of Vehicle Dynamics

In order to control a vehicle, the pilot must learn its basic response characteristics. One can readily envision this as a two-stage process: 1) the development of an appropriate structural model for the plant; and 2) the adjustment (or fine tuning) of the parameters in that structure. Such a process is consistent with the notions of system identification theory. With regard to structure, the problem in a multi-input, multi-output plant involves learning the couplings as well as the basic modes of response. For single-input, single-output situations a fundamental issue is the order of the plant dynamics, i.e., how many integrations are there between control input and plant output.

Figures 2 and 3 show the predicted describing function and remnant for an operator optimizing his performance based on different internal models of the vehicle dynamics. In each case, the input disturbance was filtered white noise with a 2 rad/sec bandwidth. In Figure 2, the true plant dynamics are K/s, i.e., the rate-of-change of plant output is proportional to the control input. Three curves are shown: one in which the operator has the correct model, one in which the internal model is incorrect (the output is proportional to the input), and one in which the operator has a large pseudomotor noise [2]. The curve corresponding to having the correct model agrees quite well with the measured describing functions for this case [1]. Note that the effect of having the wrong internal model is substantial whereas the effect of high pseudo motor-noise is slight (a reduction in gain at low frequencies).

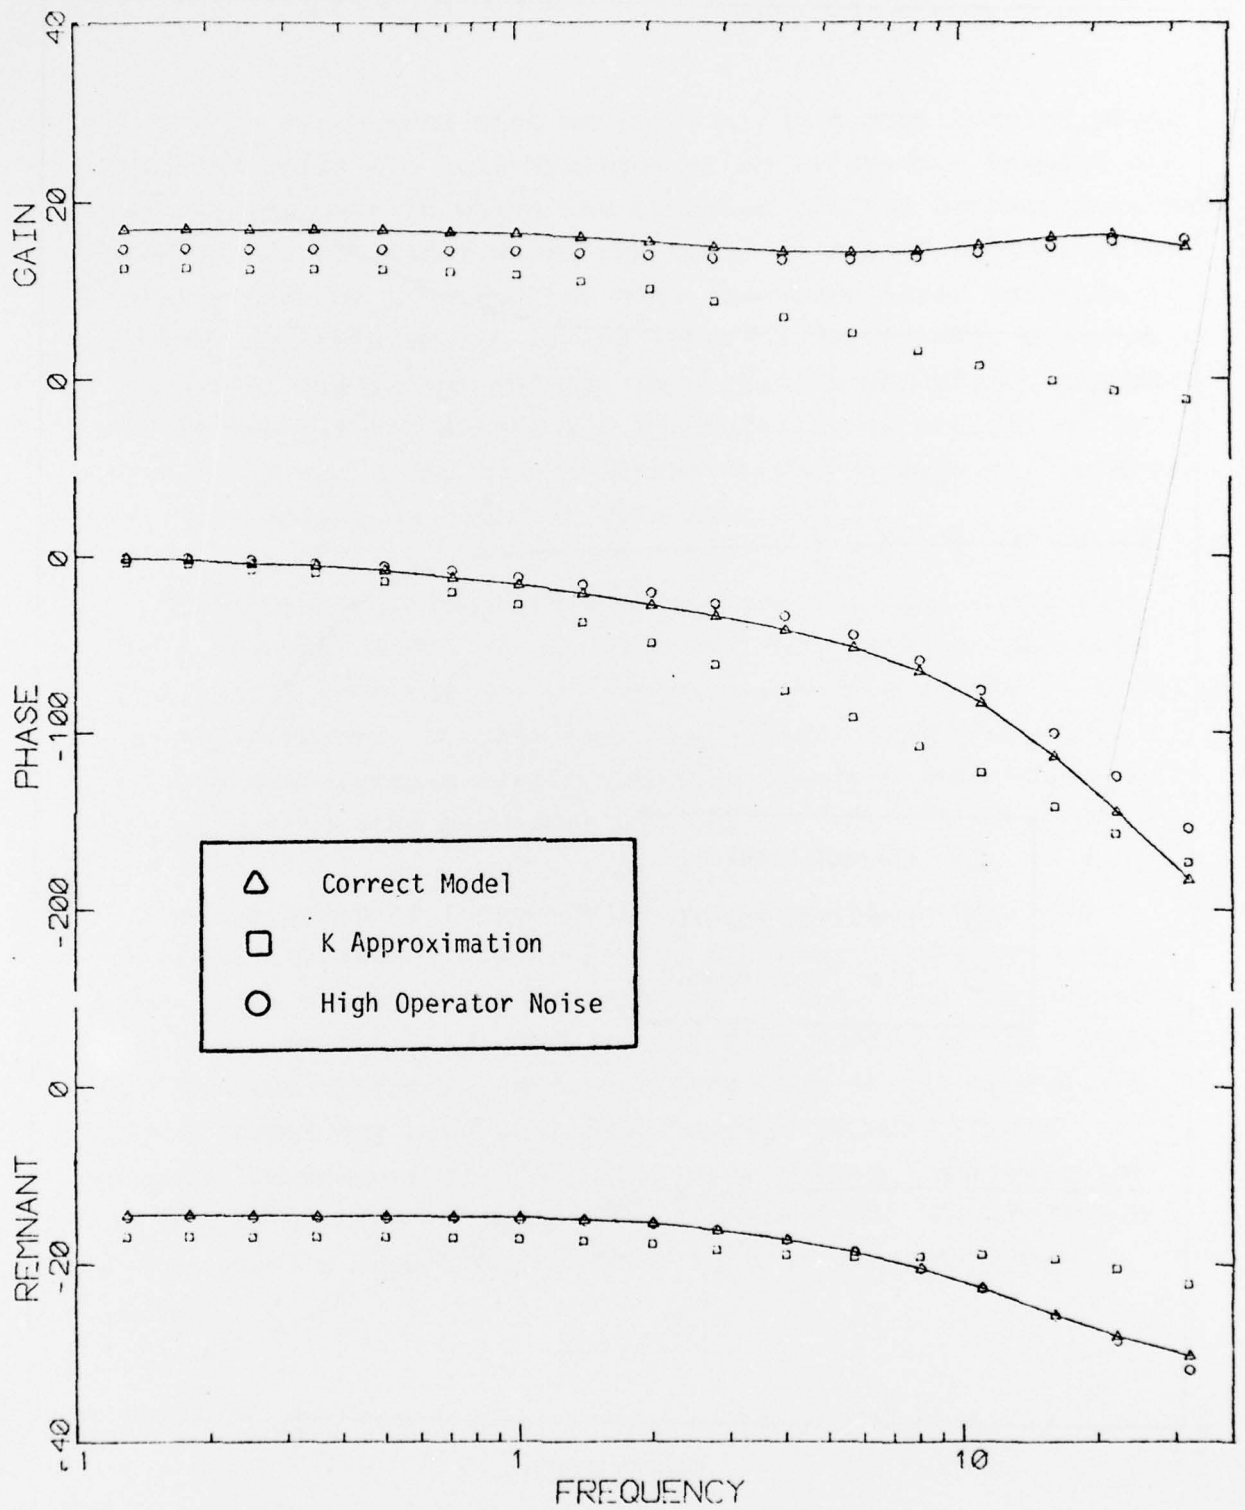


Figure 2. Effects of Deviate Internal Model and High Operator Noise on K/s Regulation

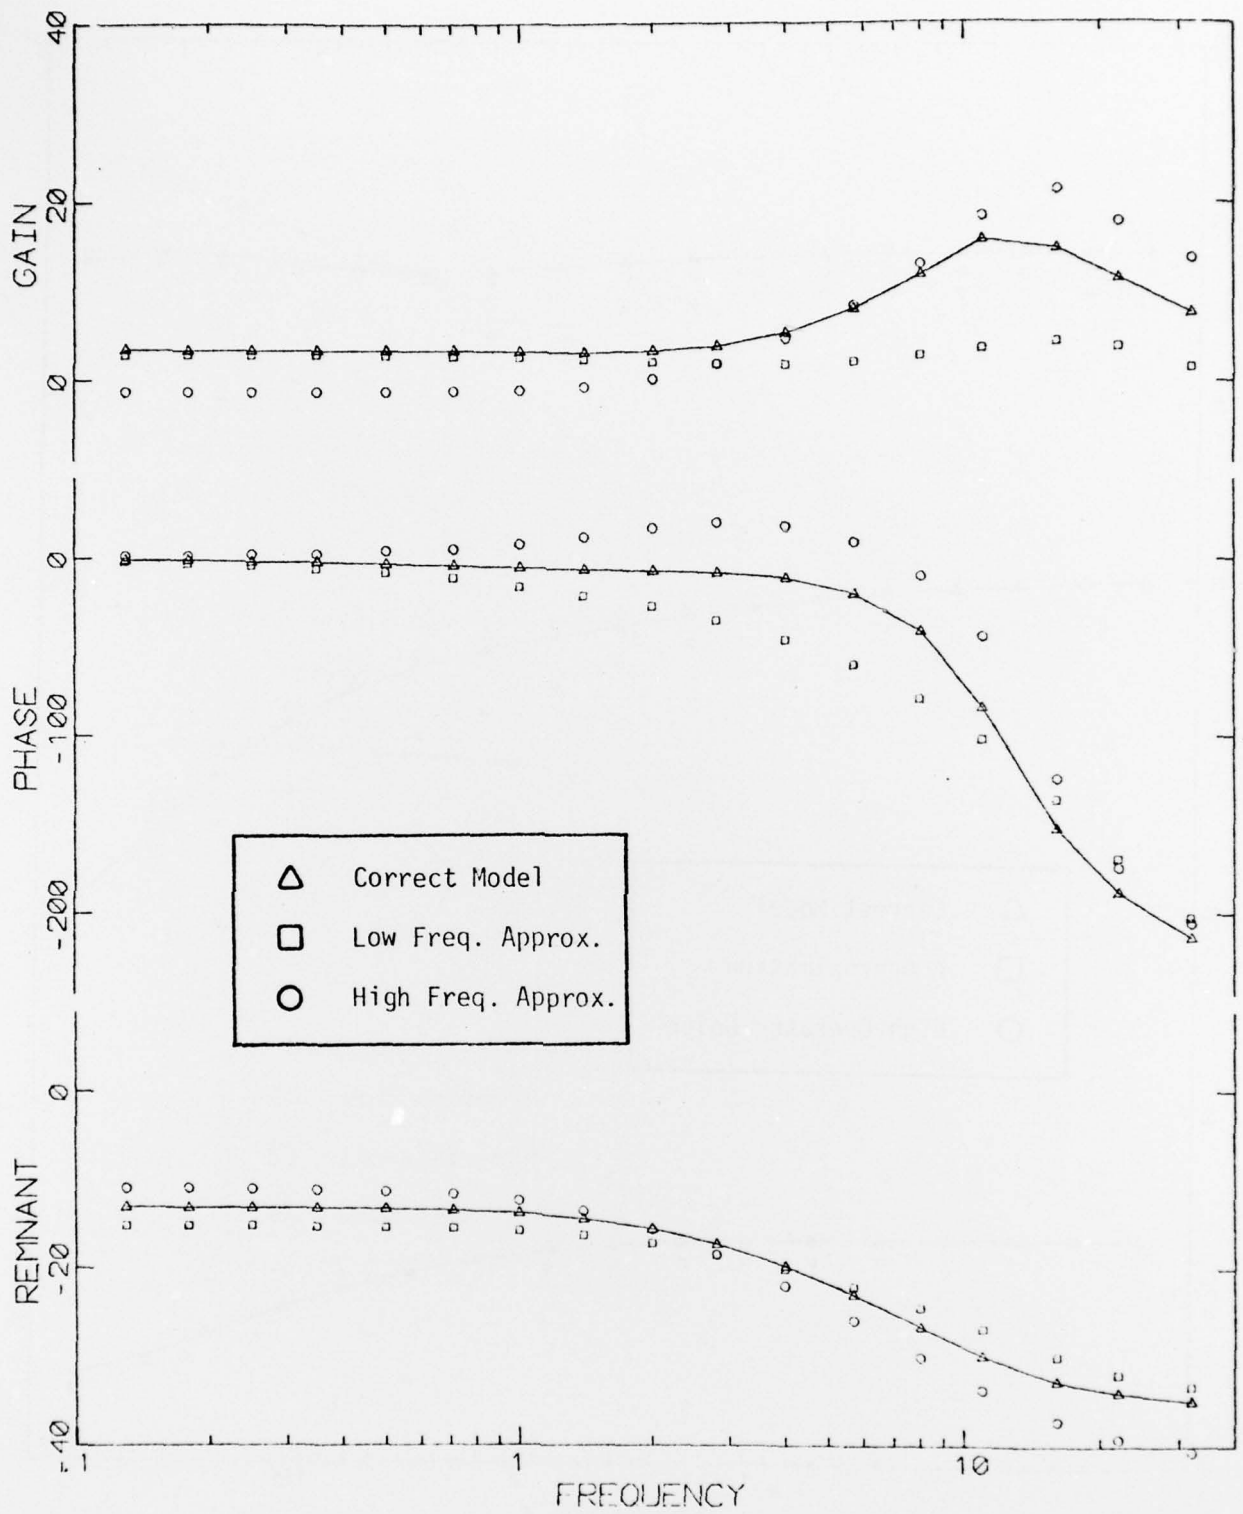


Figure 3. Effect of Deviate Internal Model on Regulation of Roll Disturbance

Figure 3 presents similar results for a more complex plant which represents the roll-dynamics of an aircraft. Results are shown for the case in which the operator has the correct internal model and for the cases where the model is a good approximation to either the low frequency or high frequency plant response. Frequency characteristics of the three vehicle models are plotted in Figure 4. Again the results show that we can expect measurements of the pilot's describing functions to be significantly different if operating with different internal models. In this case, the remnant is somewhat less revealing.

Model results were also obtained for the case where the pilot's internal model of the aircraft roll dynamics differed only slightly from the actual dynamics over the entire frequency range of interest. In this case (not shown), differences in the above measurements were not distinguishable from those that might be due to other parameter changes.

On the basis of these preliminary results, we believe that major structural errors in the operator's internal model of the plant dynamics can be inferred by comparing the measured describing function and remnant with that predicted, by the OCM, for a trained operator. Moreover, the form of the operator's internal model may also be deduced using the OCM. Major parameter errors are also probably discernible. However, the fine-tuning process of model identification may not be distinguished readily from other factors such as general noise-reduction.

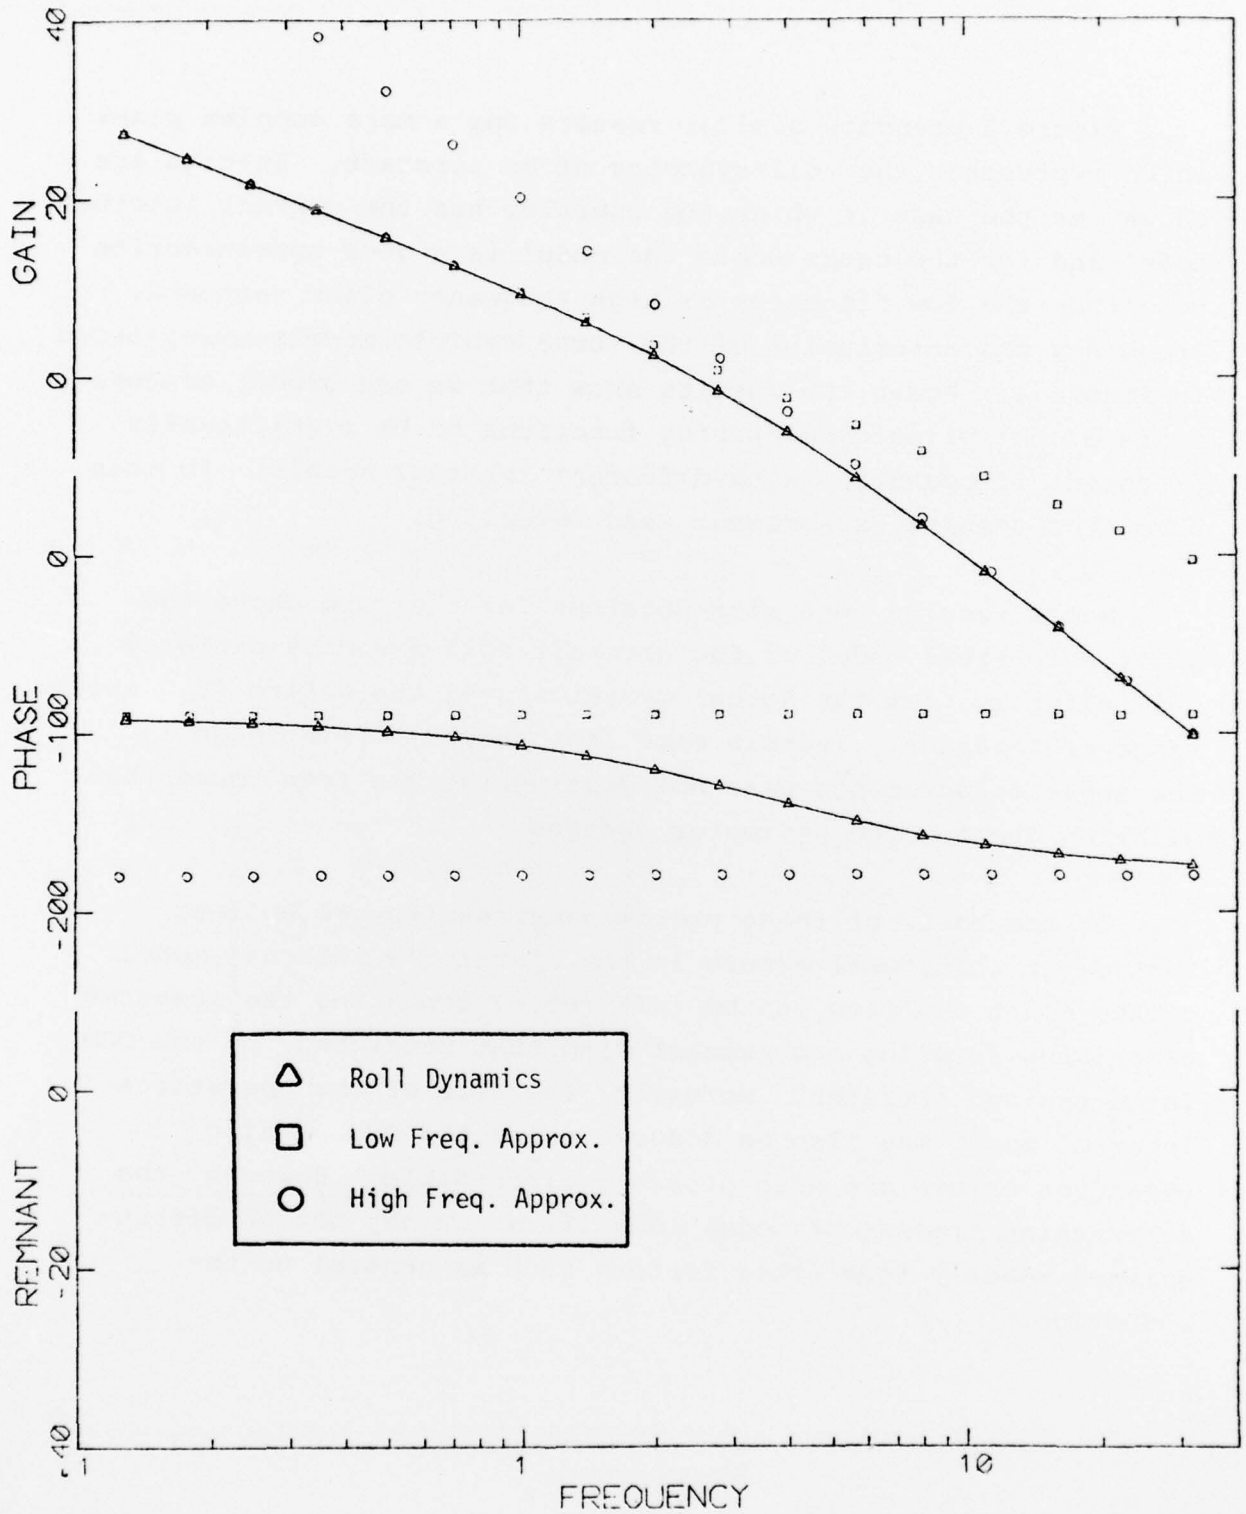


Figure 4. Vehicle Dynamics Approximations for High Performance Roll Dynamics

Learning the Input Characteristics

The K/s example described above was also examined to see if the effects of incorrect knowledge of the input characteristics would be evident. Figure 5 gives results for the case in which the operator overestimates the input bandwidth by a factor of 2. It can be seen that these results differ significantly from the situation in which the input bandwidth is known correctly only in terms of low frequency gain. If we refer to Figure 2, we see that the effect is also different from that of having an incorrect model of the vehicle dynamics.

Perceptual Efficiency

A major application of the wrong internal model concept would be to the study of learning of control strategies. In addition to learning the plant dynamics, it is believed that skill development involves learning to use the available cues most efficiently. We can envision this as a process of proper cue selection as well as noise reduction. For example, the progression-regression hypothesis [3] suggests an increasing utilization of derivative information with learning. It is therefore of interest to compare the effects of inefficient cue utilization and an incorrect internal model. Figure 6 compares predicted describing functions and remnant for optimized performance with and without rate information. The results are for the roll dynamics described earlier and it is assumed that the operator has learned the plant dynamics. It can be seen that failure to utilize rate information has a distinct impact on the measures of control strategy and perceptual efficiency. Most of this impact is at high frequencies, as expected. Furthermore, comparison with Figure 3 reveals that lack of rate information produces a decidedly different result from that obtained with a low frequency approximation to the vehicle dynamics. Thus, it should be

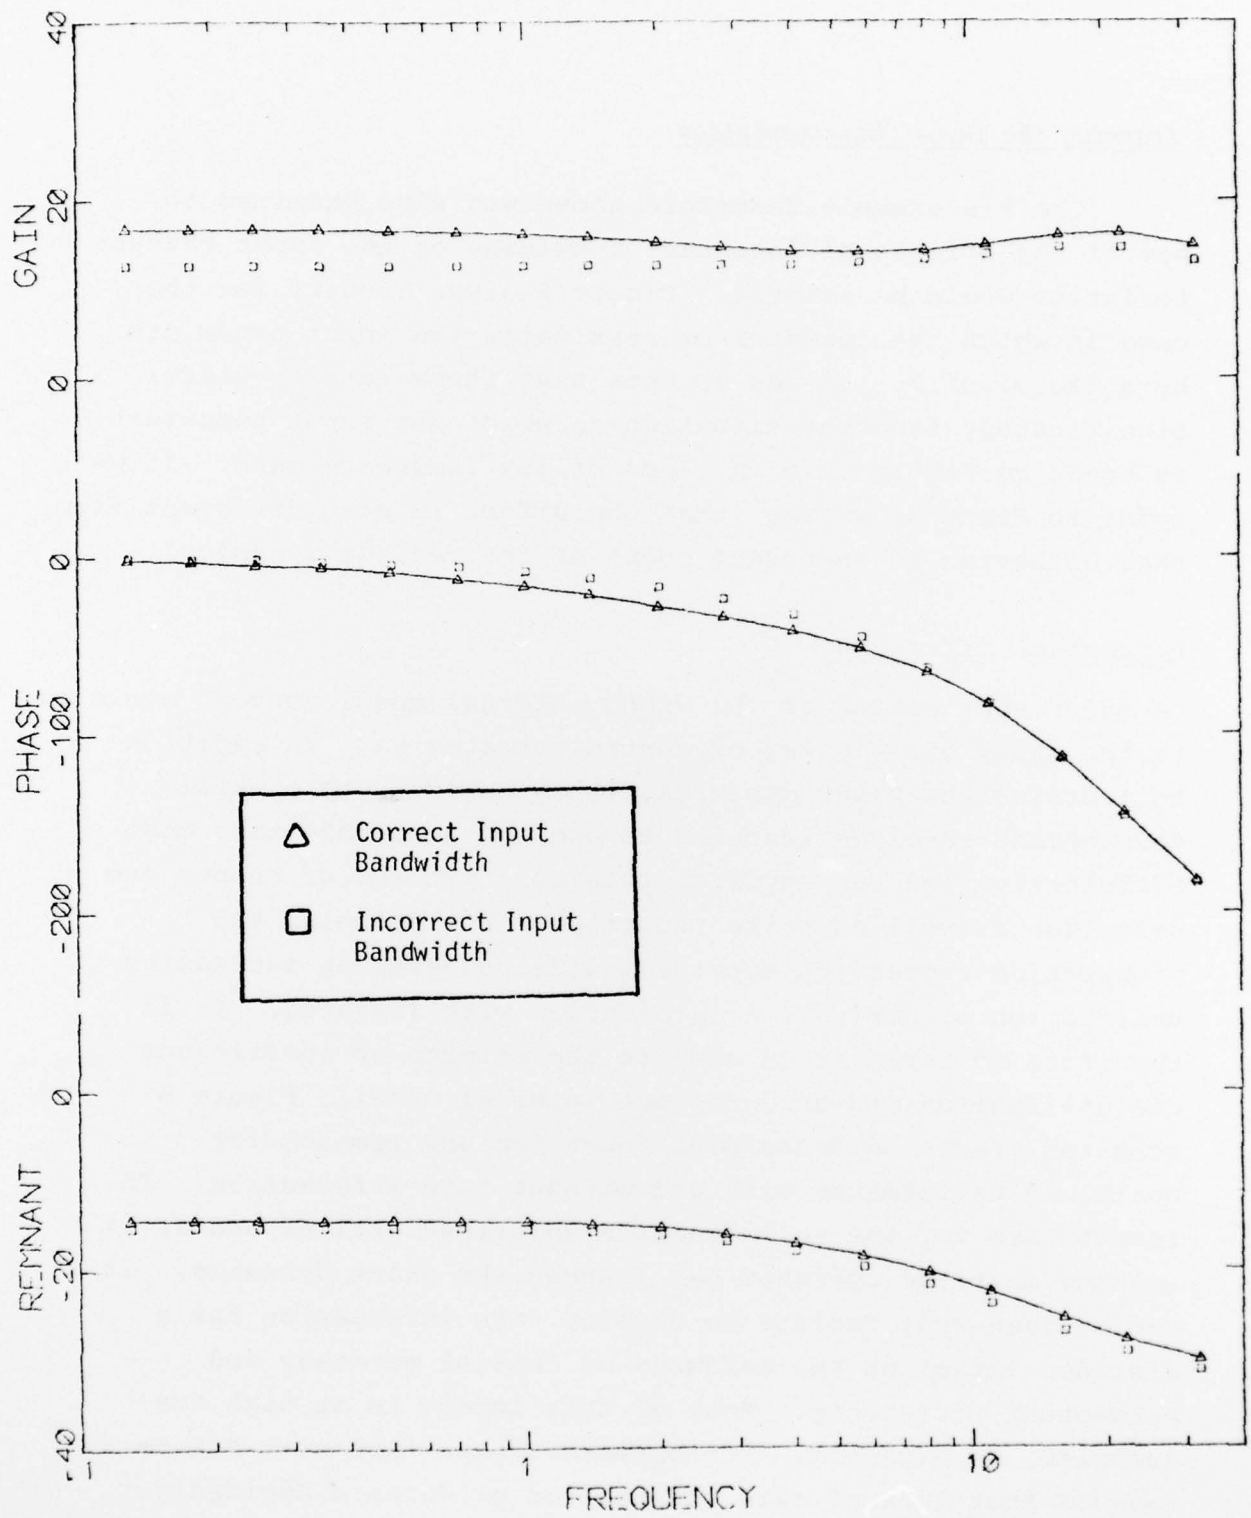


Figure 5. Effect of Wrong Estimate of Input Bandwidth on K/s Regulation

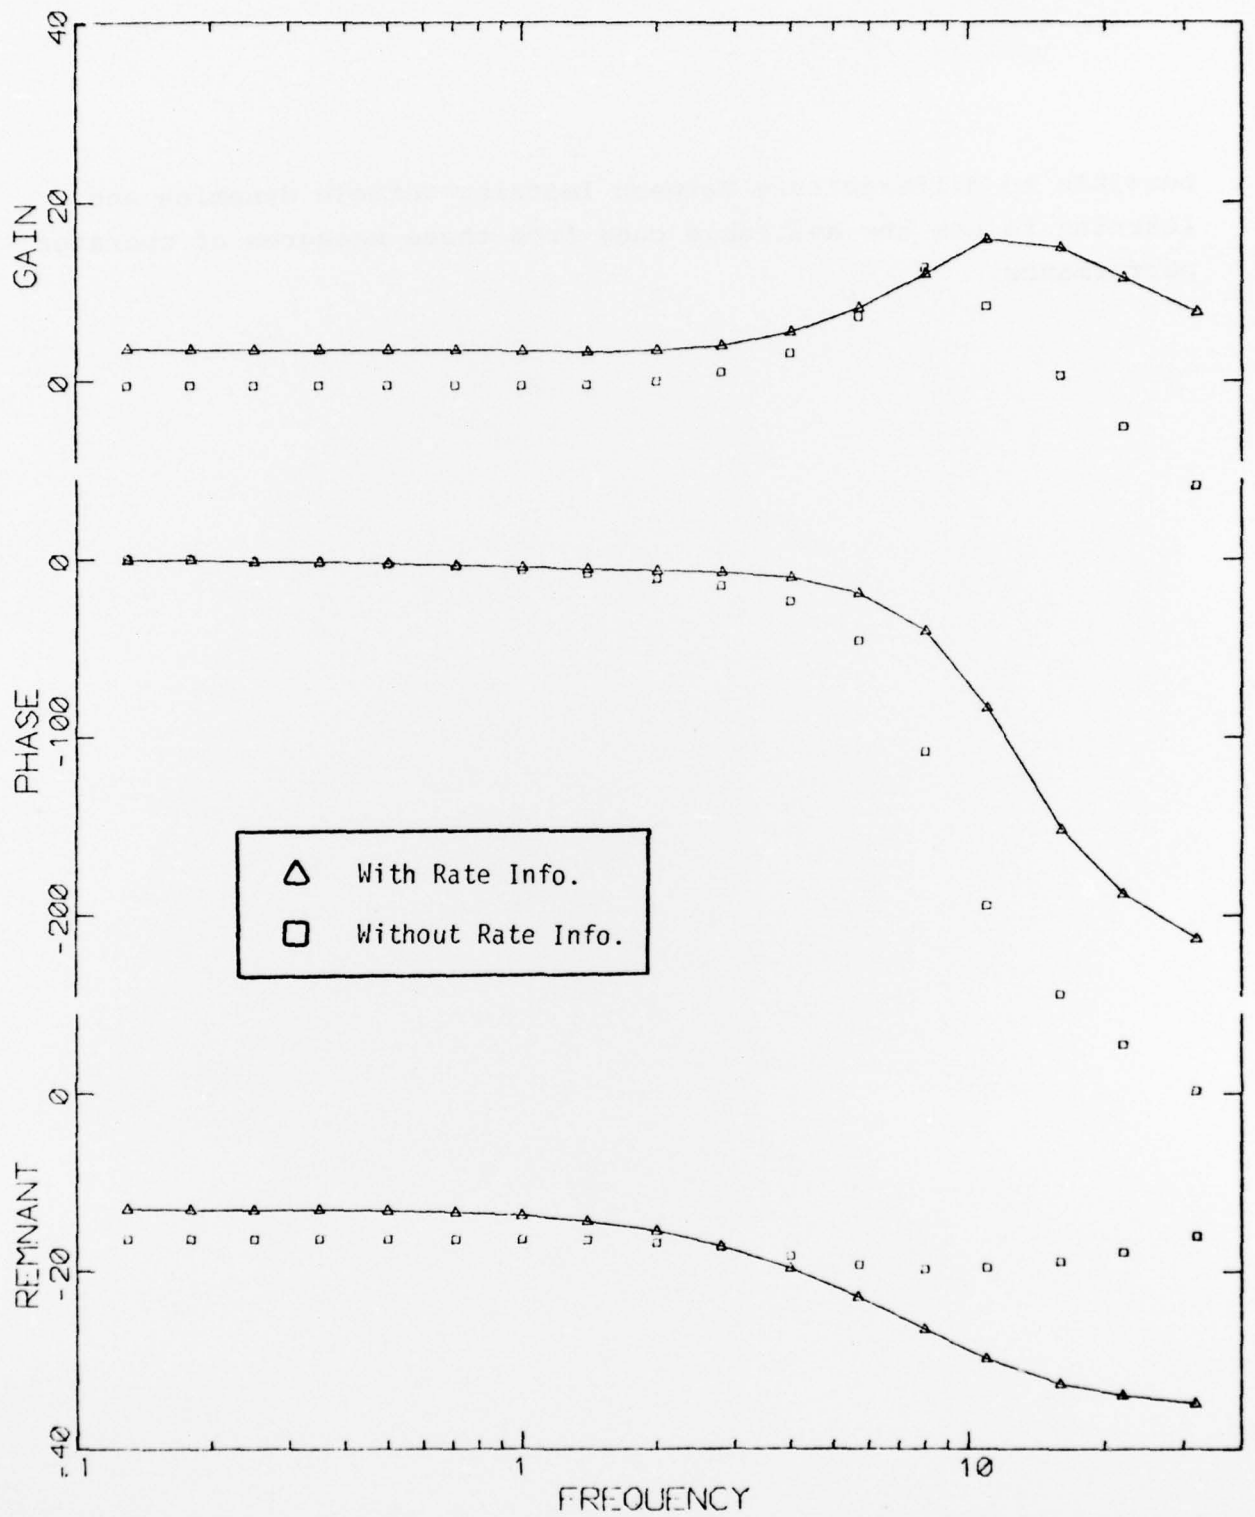


Figure 6. Effect of Non-Utilization of Rate Information on Roll Regulation

possible to differentiate between learning vehicle dynamics and learning to use the available cues from these measures of operator performance.

4. Conclusion

In conclusion, we wish to point out that, while the notion of a deviate internal model is appealing intuitively, in the authors' opinion, its use for trained operators even in complex tasks should be considered with caution for the following reasons: (1) the assumption of a perfect model works quite well for trained operators performing well defined tasks; (2) the observation and motor noises included in the optimal control model already account for some model imperfections; (3) when there is significant process noise, state prediction and estimation is difficult and the contribution to performance degradation of deviate internal models is likely to be reduced significantly; (4) computational requirements for predicting closed loop performance may well increase under this assumption; and (5) most importantly, in order to avoid having to choose among an infinity of possible internal models, rules for picking a specific internal model are needed, and, presently, no such rules exist. On the other hand, the programs developed here and the insights provided by the sensitivity analyses should prove very useful in studying and analyzing the performance of untrained operators.

5. References

1. Kleinman, D.L., S. Baron and W.H. Levison "A Control Theoretic Approach to Manned-Vehicle Systems Analysis" IEEE Trans. on Auto. Control, Vol. AC-16, No. 6, December 1971.
2. Baron, S. and J. Berliner, "MANMOD 1975: Human Internal Models and Scene-Perception Models," U.S. Army Missile Command, Redstone Arsenal, Alabama, Technical Report No. RD-CR-76-3, September 1975.
3. Fuchs, A.H. "The Progression-Regression Hypotheses in Perceptual-Motor Skill Learning" Journal of Experimental Psychology, 63, 1962, pp 177-182.

DISTRIBUTION

	No. of Copies		No of Copies
Assistant Secretary of Defense for Manpower and Reserve Affairs Department of Defense Washington, D.C. 20301	1	Chief Human Engineering Laboratory Detachment Attn: DRXHE-FA, Mr. Sorin Frankford Arsenal Philadelphia Pennsylvania 19137	1
HQ DA DAPE-PBR, Mr. Barber Washington, D.C. 20310	1		
Commander US Army Materiel Development and Readiness Command Attn: DRXAM-TL 5001 Eisenhower Avenue Alexandria, Virginia 22333	2	Chief Human Engineering Laboratory Detachment Attn: DRXHE-PTA, Mr. Carlock Picatinny Arsenal Dover, New Jersey 07801	1
Headquarters US Army Medical R&D Command Attn: Behavior Sciences Rsch Br. Main Navy Building Washington, D.C. 20315	1	Chief Human Engineering Laboratory Detachment Attn: DRXHE-RI, Mr. Galbaux Rock Island Arsenal Rock Island, Illinois 61201	1
Director Walter Reed Army Institute of Research Walter Reed Army Medical Center Attn: Neuropsychiatry Division Washington, D.C. 20012	1	Chief Human Engineering Laboratory Detachment Attn: DRXHE-TA, Mr. J. Erickson US Army Tank-Automotive Research and Development Command Warren, Mississippi 48090	1
OAD/ENLS ODD&E, Pentagon, Room 3D129 Attn: LTC Henry L. Taylor Washington, D.C. 20310	1	Chief Human Engineering Laboratory Detachment Attn: DRXHE-ME, Mr. Antenucci, c/o DRXFB-TO US Army Mobility Equipment Research and Development Command Fort Belvoir, Virginia 22060	1
US Army Human Engineering Laboratory Representative Attn: DRXHE-AV, Dr. M. Hofmann Directorate for RD&E US Army Aviation Systems Command P. O. Box 209 St. Louis, Missouri 63166	1	US Army Research Office Attn: Information Processing Office Box CM, Duke Station Durham, North Carolina 27706	1
Commander US Naval Weapons Laboratory Attn: Technical Library Dahlgren, Virginia 22448	1	Commander US Army Air Defense School Attn: ATSA-CTD-MO Fort Bliss, Texas 79916	1
Commander US Naval Weapons Center Attn: Code 533, Technical Library China Lake, California 93555	1	Commander Rock Island Arsenal Attn: SARRI-LP-L, Technical Library Rock Island, Illinois 61201	1
Director, Development Center US Marine Corps Development and Education Command Attn: Chairman, Air Operations Division Quantico, California 22134	1	Commander US Army Electronics Command Attn: DRSEI-PA-RH, Mr. Baron Fort Monmouth, New Jersey 07703	1
HQ Rome Air Development Center Attn: TILD Griffiss Air Force Base New York 13440	1	Library US Army War College Carlisle Barracks Pennsylvania 17013	1
Chief Human Engineering Laboratory Detachment Attn: DRXHE-AM, Mr. Miles US Army Systems Analysis Activity Aberdeen Proving Ground Maryland 21005	1	Director US Army Ballistic Research Laboratory Attn: DRXBR-EB Aberdeen Proving Ground Maryland 21005	1

	No. of Copies		No. of Copies
Army Research Institute Field Unit Attn: Dr. Robert W. Bauer Building 2423 Fort Knox, Kentucky 40121	1	Director US Army Human Engineering Laboratory Attn: DRXHE-DBD Aberdeen Proving Ground Maryland 21005	2
Department of Transportation Library Reference and Research Branch, TAD-494.6 800 Independence Avenue SW Washington, D.C. 20591	1	Medical Library, Building 148 Naval Submarine Medical Research Laboratory Box 900, Submarine Base New London Groton, Connecticut 06340	1
US Postal Service Laboratory Attn: Mr. D.Y. Cornog Chief, HF Group 11711 Parklawn Drive Rockville, Maryland 20852	1	Code 455 Office of Naval Research Washington, D.C. 20360	1
Mr. Edgar M. Johnson US Army Research Institute Room 219, The Commonwealth Building 1320 Wilson Boulevard Arlington, Virginia 22209	1	Dr. Marshall J. Farr Associate Director, Personnel and Training Code 458 Office of Naval Research Washington, D.C. 20360	1
Federal Aviation Administration Civil Aeromedical Institute Library AC-101.1, P. O. Box 25082 Oklahoma City, Oklahoma 73125	1	Commandant US Army Artillery and Missile School Attn: USAAMS Technical Library Fort Sill, Oklahoma 73503	1
Department of Operations Analysis Naval Postgraduate School Attn: Professor James K. Arima Monterey, California 93940	1	ARI Field Unit P. O. Box 6057 Fort Bliss, Texas 79916	1
Commander USAVSCOM Attn: DRSAV-R-F, Mr. S. Moreland P. O. Box 209 St. Louis, Missouri 63166	1	Commander Fort Huachuca Support Command, US Army Attn: Tech References Division Fort Huachuca, Arizona 85613	1
Director Naval Research Laboratory Attn: Code 5132A Washington, D.C. 20390	1	Commander Attn: Technical Library White Sands Missile Range New Mexico 88002	1
Commanding Officer Naval Training Equipment Center Attn: Technical Library Orlando, Florida 32813	1	Director USA Air Mobility Research and Development Laboratory Attn: Dr. Richard S. Dunn Ames Research Center Moffett Field, California 94035	1
6J70 AMRL Attn: MRHE	2	Commander US Army Electronics Command Attn: DRSEL-VL-E Fort Monmouth, New Jersey 07703	1
MRHE, Dr. M. J. Warrick	1	Director Military Psychology and Leadership United States Military Academy West Point, New York 10996	1
MRHEK, Mr. C. Bates, Jr.	1	Commander Watervliet Arsenal Attn: SWENV-RDT Watervliet, New York 12189	1
Wright-Patterson Air Force Base Ohio 45433		Commander Frankford Arsenal Attn: Library (C2500, Building 51-2) Philadelphia, Pennsylvania 19137	1
AF Flight Dynamics Laboratory Attn: FDCR (CDIC)	1		
AFFDC-FGR, LT Greg Peters Wright-Patterson Air Force Base Ohio 45433	1		

		No. of Copies			No. of Copies
ARI Field Unit			US Army Infantry School Library		
Attn: Library			Infantry Hall		
Fort Knox, Kentucky 40121	1		Fort Benning, Georgia 31905	1	
Commander			Project Manager		
US Army Tank-Automotive Command			Office of the Project Manager		
Attn: DRSTA-RHFL, Research Library	1		for Training Devices		
Warren, Mississippi 48090			Attn: DRCPM-TND, Dr. R.E. Odom	1	
Fort Benning, Georgia 31905			Fort Benning, Georgia 31905		
Commander			Defense Documentation Center		
US Army Tank-Automotive Command			Cameron Station		
Attn: DRSTA-R	1		Alexandria, Virginia 22314	12	
Warren, Mississippi 48090			Commander		
Director of Graduate Studies and Research			US Army Materiel and Readiness Command		
Attn: Behavioral Sciences Representative	1		Attn: DRCRD	1	
US Army Command and General Staff College			DRCDL	1	
Fort Leavenworth, Kansas 66027			5001 Eisenhower Avenue		
US Army Agency for Aviation Safety			Alexandria, Virginia 22333		
Attn: Librarian	1		Bolt, Beranek and Newman Inc.		
Fort Rucker, Alabama 36360			Attn: Dr. S. Baron	2	
Chief			Dr. D. Kleinmas	1	
Army Research Institute			Dr. J. Baliser	1	
P. O. Box 476			50 Moulton Street		
Fort Rucker, Alabama 36360	1		Cambridge, Maryland 02138		
Commander			DRXHE-MI, Mr. Chaikin	1	
US Army Aeromedical Research Laboratory			DRCPM-HFE		
P. O. Box 577			-AH	1	
Attn: Dr. Kent Kimball	1		-MPE	1	
Library	1		-LDE	1	
Fort Rucker, Alabama 36360			-ROL-E	1	
US Army Natick Research and Development Command			-RK	1	
Attn: Tech Library (DRXNM-STL)	1		-HEL-T	1	
Natick, Massachusetts 01760			-TOE	1	
US Army Natick Research and Development Command			-MW	1	
Behavioral Sciences Division			DRSMI-LP, Mr. Voigt		
Attn: DRXNM-PRB	1		-W	1	
DRXNM-PRBE	1		DRDMI-X, Dr. McDaniel		
Natick, Massachusetts 01760			-T, Dr. Kobler	1	
US Army Medical Bioengineering Research and Development Laboratory			-H	1	
Fort Detrick, Building 568			-Y	1	
Frederick, Maryland 21701	1		-YD	1	
Commander			-YT	1	
US Army Training Device Agency, Naval Training Equipment Center			-TD	1	
Attn: Code N2A	1		-TDC	1	
Orlando, Florida 32813			-TDD	1	
			-TDF	1	
			-TDK	1	
			-TDR	1	
			-TDS	1	
			-TDW	1	
			-TDW, Mr. Dickson	5	
			-TE	1	
			-TC	1	
			-TL	1	
			-TPN, L. Aymett	1	
			-TBD	3	
			-TI (Record Set)	1	
			(Reference Copy)	1	