


AD-A133 876


ELF/VLF (EXTREMELY LOW FREQUENCY/VERY LOW FREQUENCY)  
LONG PATH PULSE PROG. (U) NAVAL OCEAN SYSTEMS CENTER  
SAN DIEGO CA R A PAPPERT ET AL. AUG 83 NOSC/TR-891

1/2

UNCLASSIFIED

F/G 20/14. NL

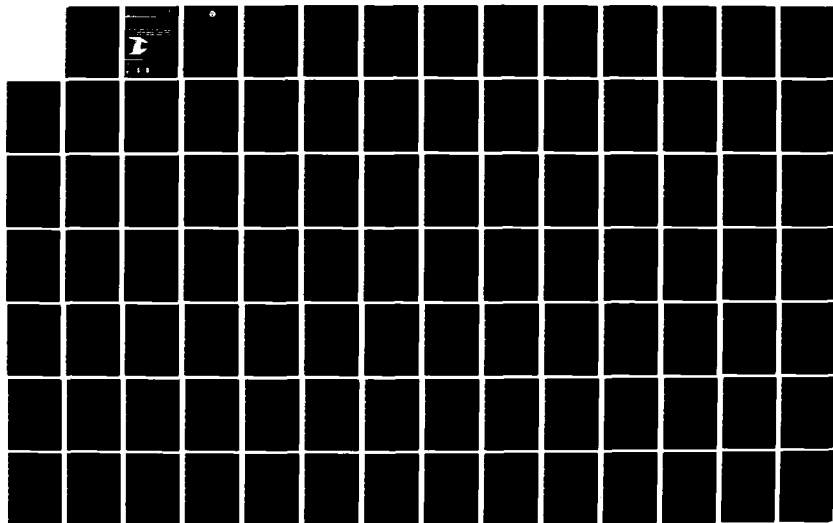



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A



NOSC TR 891

Technical Report 891

# WAVELENGTH PULSE PROGRAM OF ARBITRARY ORIENTATION

R. A. Pappert  
L. R. Hiney  
J. A. Ferguson

August 1963  
Approved for public  
release — August 1963

Prepared for  
Defense Nuclear Agency

# NOSC

NAVAL OCEAN SYSTEMS CENTER  
San Diego, California 92152

22 10 90 048



NAVAL OCEAN SYSTEMS CENTER SAN DIEGO, CA 92152

---

AN ACTIVITY OF THE NAVAL MATERIAL COMMAND

**J.M. PATTON, CAPT, USN**

Commander

**R.M. HILLYER**

Technical Director

**ADMINISTRATIVE INFORMATION**

The work reported here was performed by members of the Ocean & Atmospheric Sciences Division under program element RDDA, project MP20, during the period January 1983-August 1983. Washington sponsorship was provided by the Defense Nuclear Agency.

Released by  
J.H. Richter, Head  
Ocean & Atmospheric  
Sciences Division

Under authority of  
J.D. Hightower, Head  
Environmental Sciences  
Department

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NOSC Technical Report 891 (TR 891)	2. GOVT ACCESSION NO. AD-A133876	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ELF/VLF LONG PATH PULSE PROGRAM FOR ANTENNAS OF ARBITRARY ELEVATION AND ORIENTATION		5. TYPE OF REPORT & PERIOD COVERED Interim January - August 1983
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) R.A. Pappert L.R. Hitney J.A. Ferguson		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Ocean Systems Center San Diego, CA 92152		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS RDDA, MP20
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Nuclear Agency Washington, DC 20305		12. REPORT DATE August 1983
		13. NUMBER OF PAGES 109
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) ELF (extremely low frequency)      Pulse propagation VLF (very low frequency)          Computer program Antennas Earth-ionosphere waveguide		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  A computer program designed to handle pulse propagation problems when the propagation channel is the earth-ionosphere waveguide, and intended for use in the elf/vlf bands, is presented. The program is intended for use with laterally homogeneous channels. Allowance is made for transmit and receive antennas of arbitrary elevation and orientation. Mode data as a function of frequency from a waveguide program are required inputs to the present program. The mode data are interpolated by using cubic splines, and the requisite integrals are treated numerically by means of the fast Fourier transform.		

DD FORM 1473

1 JAN 73

EDITION OF 1 NOV 68 IS OBSOLETE U

S-N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

CONTENTS

I. INTRODUCTION . . . page 1

II. SOURCE, RECEIVER, AND CHANNEL MODELS. . . 3

    Output Waveform . . . 3

    Receiver . . . 4

    Transmitter . . . 4

    Channel-Excitation Factors and Height Gains . . . 9

    Channel-Mode Sum . . . 13

III. DESCRIPTION OF INPUT . . . 15

IV. PROGRAM LAYOUT . . . 24

V. DESCRIPTION OF OUTPUT . . . 33

REFERENCES . . . 57

APPENDIX - PROGRAM LISTING . . . 59

<b>Accession For</b>	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability	
Date	
A	



## I. INTRODUCTION

This report describes and lists a computer program designed to handle pulse propagation problems when the propagating channel is the earth-ionosphere waveguide and is intended for use in the elf/vlf bands. The report is an extension of earlier work (ref 1), which was restricted to pulse propagation of the vertical electric field generated by a ground-based vertical electric dipole source. The present extension makes allowance for calculating, at any height within the guide, all electric field components generated by electric dipole sources of arbitrary orientation and elevation. Inputs are mode data (i.e., eigenangles and excitation factors) as a function of frequency as determined, for example, by the waveguide program of reference 2. The mode data are interpolated by using cubic splines. The pulse shape integral (which is a Fourier transform) is calculated by employing, at the user's option, either a fast Fourier transform technique or a Filon technique. Normally, the fast Fourier transform (FFT) technique is used. Advantages and disadvantages of the FFT have been discussed by Seyler, Block, and Flynn (ref 3). Its major advantage is a savings in computational time, whereas a disadvantage may be that, strictly, only periodic pulse trains may be analyzed. Thus, when a nonperiodic pulse is considered, it must be treated as a periodic pulse train with period much greater than the pulse width in order to obtain adequate resolution. Another disadvantage of the FFT is that there is no measure of the accuracy of the integral evaluation. For this reason, a second integration routine based on the Filon method (ref 4) is included. The method is more direct but much slower than the FFT. In addition to the integral evaluation, output of the Filon integration contains an indication of the accuracy of the evaluation, and this is perhaps most useful for purposes of checking the FFT.

At present, the program is designed to handle only laterally homogeneous waveguides. It is likely that the subroutine "CHANEL" could be extended to allow for lateral inhomogeneity of the guide via WKB or mode conversion methods. Whereas the program of reference 1 was developed primarily as a tool for calculating slow-tail atmospheric wave forms (i.e., wave shapes in the elf band generated by lightning discharges), the present program is intended more as an aid to elf/vlf system designers. Thus, in addition to the slow-tail

waveform capability, the program allows for the study of the distortion of square-wave and Gaussian pulse envelopes (as well as sequences of such pulses) and for the analysis of spread spectrum systems (ref 5, 6). However, it is stressed that alternative input waveforms can be accommodated by straightforward modification of the subroutine XMTR.

The mathematical problem at hand simply reduces to the calculation of a Fourier integral for which the integrand is made up of a transmitter spectrum, receiver spectrum, and channel spectrum, each of which is discussed in the following section. In section III, the program input is described and in section IV the program structure is outlined. Section V contains output description and sample results. The appendix contains a program listing.



## II. SOURCE, RECEIVER, AND CHANNEL MODELS

### OUTPUT WAVEFORM

In the following,  $x, y, z$  is a Cartesian coordinate system with  $x - z$  being the plane of propagation and  $z$  directed into the ionosphere with the ground at  $z = 0$ . In terms of the source, receiver, and channel spectrums, the output waveform,  $G(x, z_R, t; z_T)$ , at a great circle range  $x$ , altitude  $z_R$ , and time  $t$  generated by a source at  $x = y = 0, z = z_T$  may be written as ( $i = \sqrt{-1}$ )

$$\begin{aligned}
 G(x, z_R, t; z_T) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} s(\omega)r(\omega)h(\omega, x, z_R; z_T)e^{i\omega t} d\omega \\
 &= \frac{1}{\pi} \operatorname{Re} \int_0^{\infty} s(\omega)r(\omega)h(\omega, x, z_R; z_T)e^{i\omega t} d\omega \\
 &= 2 \operatorname{Re} \int_0^{\infty} S(f)R(f)H(f, x, z_R; z_T)e^{2\pi i f t} df \quad (1)
 \end{aligned}$$

where

$$S(f) = s(\omega) = s(2\pi f) \text{ source (current moment) spectrum} \quad (2)$$

$$R(f) = r(\omega) = r(2\pi f) \text{ receiver spectrum} \quad (3)$$

$$\begin{aligned}
 H(f, x, z_R; z_T) &= h(\omega, x, z_R; z_T) \\
 &= h(2\pi f, x, z_R; z_T) \text{ channel spectrum.} \quad (4)
 \end{aligned}$$

The second and third equalities in equation 1 follow from the requirement that  $G$  be a real quantity, so that

$$\begin{aligned}
 S(f) &= S^*(-f), R(f) = R^*(-f), H(f, x, z_R; z_T) \\
 &= H^*(-f, x, z_R; z_T) \quad (5)
 \end{aligned}$$

where the asterisk denotes the complex conjugate.  $G$  can represent any of the electric field components,  $E_x, E_y, E_z$ , generated, as mentioned above, by an arbitrarily oriented electric dipole at  $x = y = 0, z = z_T$ . The receiver, source, and channel functions are described below.

## RECEIVER

RECVR is a subroutine that can be easily modified or replaced to accommodate the individual user's needs. The particular RECVR subroutine contained in the program listing in the appendix assumes a receiver function of the form

$$R(f) = \left( \frac{if/f_1}{1 + if/f_1} \right)^P \left[ \left( 1 + i(f - f_2)/f_3 \right)^{-Q} + \left( 1 + i(f + f_2)/f_3 \right)^{-Q} \right]; f_2 \neq 0$$
$$R(f) = \left( \frac{if/f_1}{1 + if/f_1} \right)^P (1 + if/f_3)^{-Q}; f_2 = 0 \quad (6)$$

where the frequencies  $f_1$ ,  $f_2$ ,  $f_3$  and the exponents  $P$  and  $Q$  are read into the program via namelist. This receiver function allows for modeling receivers representative of spread spectrum systems (ref 5) as well as those used in slow wave tail studies of atmospherics. Observe that the function satisfies the condition specified in equation 5.

## TRANSMITTER

TRXMT is a subroutine that, too, can be readily altered to meet specific needs of the user. In the present program, four source functions are available. They are called by setting IFLGTR = 1, 2, 3, or 4. The source functions are:

1) IFLGTR = 1

$$s(\omega) = u(\omega)v(\omega) \quad (7)$$

where

$$u(\omega) = - \frac{e^{i\omega T/2}}{2} \left[ \frac{1}{(\omega_0 - \omega)} \left( e^{i(\omega_0 - \omega)T} - 1 \right) + \frac{1}{(\omega_0 + \omega)} \left( e^{-i(\omega_0 + \omega)T} - 1 \right) \right] \quad (8)$$

$$\begin{aligned}
 v(\omega) &= \sum_{n=0}^N e^{-i\omega n(T+\delta t)} \\
 &= \frac{\exp(-i\omega(N+1)(T+\delta t)/2)}{\exp(-i\omega(T+\delta t)/2)} \frac{\sin(\omega(N+1)(T+\delta t)/2)}{\sin(\omega(T+\delta t)/2)} \quad (9)
 \end{aligned}$$


The spectrum  $s(\omega)$  corresponds to the time function

$$g(t) = \sum_{n=0}^N q_n(t) \quad (10)$$

where

$$\begin{aligned}
 q_n(t) &= \sin\left[\omega_0\left(t - n(T+\delta t) + T/2\right)\right] : n(T+\delta t) - T/2 \leq t \leq n(T+\delta t) + T/2 \\
 &= 0 : \text{otherwise.}
 \end{aligned}$$

Equation 10 represents a sine wave modulated by a series of  $N+1$  square wave envelopes as indicated below.

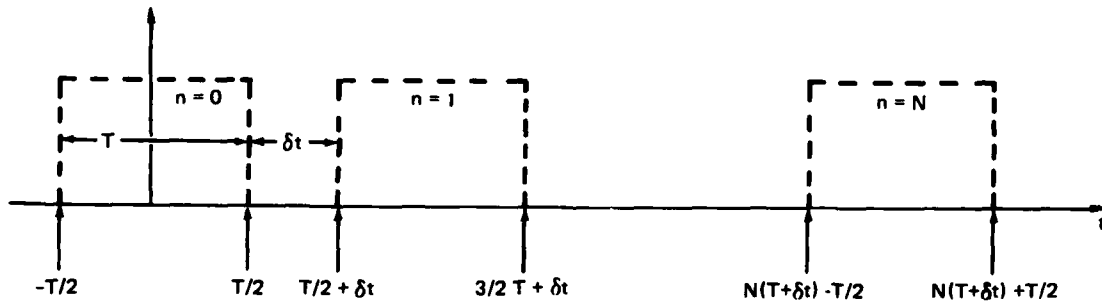

If equation 1 is used to define

$$a + ib = \int_0^{\infty} S(f)R(f)H(f, x, z_R; z_T)e^{2\pi ift} dt, \quad (11)$$

the envelope  $2\sqrt{a^2 + b^2}$  normalized to unity is the plotted output for IFLGTR = 1. Printed output in units of dB above a  $\mu\text{V/m}$  per kW is also available. This

normalization assumes that equation 10 is multiplied by a current moment corresponding to a CW power output of 1 kW at  $f_0$  when placed vertically over a perfectly conducting half plane.

ii) IFLGTR = 2

$$s(\omega) = w_1(\omega)v_1(\omega) + w_2(\omega)v_2(\omega) \quad (12)$$

where

$$w_1(\omega) = \frac{\sqrt{\pi T}}{2i} \exp\left(-(\omega_0 - \omega)^2 T^2 / 4\right) \quad (13)$$

$$w_2(\omega) = \frac{i\sqrt{\pi T}}{2} \exp\left(-(\omega_0 + \omega)^2 T^2 / 4\right) \quad (14)$$

$$\begin{aligned} v_1(\omega) &= \sum_{n=0}^N e^{i(\omega_0 - \omega)n\delta t} \\ &= \frac{\exp(i(\omega_0 - \omega)(N + 1)\delta t/2)}{\exp(i(\omega_0 - \omega)\delta t/2)} \frac{\sin((\omega_0 - \omega)(N + 1)\delta t/2)}{\sin((\omega_0 - \omega)\delta t/2)} \end{aligned} \quad (15)$$

$$\begin{aligned} v_2(\omega) &= \sum_{n=0}^N e^{-i(\omega_0 + \omega)n\delta t} \\ &= \frac{\exp(-i(\omega_0 + \omega)(N + 1)\delta t/2)}{\exp(-i(\omega_0 + \omega)\delta t/2)} \frac{\sin((\omega_0 + \omega)(N + 1)\delta t/2)}{-\sin((\omega_0 + \omega)\delta t/2)} \end{aligned} \quad (16)$$


The spectrum in this instance corresponds to the time functions

$$g_1(t) = \sum_{n=0}^N q_{1n}(t) \quad (17)$$

where

$$q_{1n}(t) = \exp\left(-(t - n\delta t)^2 / T^2\right) \sin(\omega_0 t) \quad (18)$$

Equation 18 represents a sine wave (carrier frequency  $f_0$ ) modulated by a series of  $N + 1$  Gaussian envelopes as indicated below.

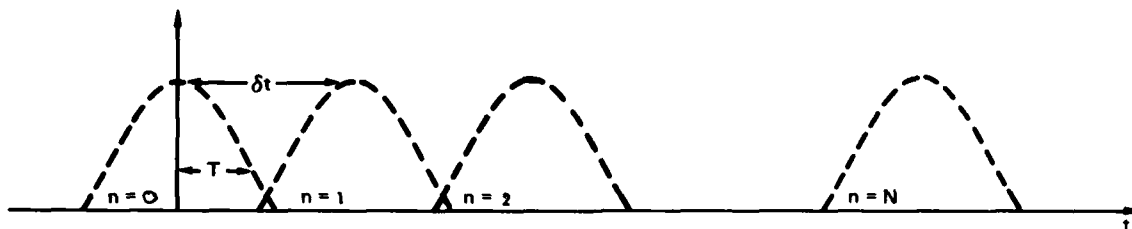

In terms of the definitions for  $a$  and  $b$  given in equation 11, the envelope  $2\sqrt{a^2 + b^2}$ , normalized to unity, is the plotted output for IFLGTR = 2. Printed output in units of dB above a  $\mu\text{V/m}$  per kW is also available. This normalization assumes that equation 17 is multiplied by a current moment corresponding to a cw power output of 1 kW at  $f_0$  when placed vertically over a perfectly conducting half plane.

### iii) IFLGTR = 3

Rothmuller (ref 5) and Kelly et al. (ref 6) have investigated the effect that the earth-ionosphere waveguide has on one type of vlf communication system. The system studied was characterized by a differential phase-encoded signal waveform composed by frequency shift keying (FSK) a carrier with a binary pseudorandom or pseudonoise (PN) sequence of pulses or chips. The FSK modulation index is 0.5, which is designated as minimum shift keying (MSK). For more detail concerning the basic waveform and terminology, the interested reader should see references 5 and 6. Here we note only that the PN sequence has a power spectrum (or source spectrum for our purposes) given by

$$S(f) = K \frac{8}{\pi^2 f_c} \left[ \frac{\cos^2 \left( (f - f_0) 2\pi / f_c \right)}{\left( 1 - 16(f - f_0)^2 / f_c^2 \right)^2} + \frac{\cos^2 \left( (f + f_0) 2\pi / f_c \right)}{\left( 1 - 16(f + f_0)^2 / f_c^2 \right)^2} \right] \quad (19)$$

where

$f_o$  = carrier frequency

$f_c$  = chip frequency

and  $K$  is a constant determined rather arbitrarily from the relation

$$\int_{-\infty}^{\infty} S(f)df = K \quad (20)$$

$K$  is chosen so that, when used in conjunction with the channel function given subsequently, it would correspond to a vertical electric dipole current moment at frequency  $f_o$ , which would radiate 1 kW of power when placed over a perfectly conducting plane. This normalization gives

$$K = \frac{2.386 \times 10^8}{f_o} \text{ A/m} \quad (21)$$

with  $f_o$  in Hz.

Output of the correlation receiver corresponding to the delay time  $\tau$  is

$$\begin{aligned} 2\text{Re} \left\{ \int_0^{\infty} S(f)R(f)H(f, x, z_R; z_T)e^{2\pi ifz} \right\} &= 2 \text{Re}(a + ib) \\ &= 2 \sqrt{(a')^2 + (b')^2} \cos(2\pi f_o \tau + \phi) \end{aligned} \quad (22)$$

where

$$\left. \begin{aligned} a' &= a \cos 2\pi f_o \tau + b \sin 2\pi f_o \tau \\ b' &= -a \sin 2\pi f_o \tau + b \cos 2\pi f_o \tau \\ \tan \phi &= b'/a' \end{aligned} \right\} \quad (23)$$

The envelope  $2\sqrt{(a')^2 + (b')^2}$  expressed in dB above  $1 \mu\text{V/m/kW}$  radiated (interpreted in the sense of equations 20 and 21) and the phase,  $\phi$ , of the correlation vector as a function of the delay  $\tau$  is the output corresponding to IFLGTR = 3.

iv) IFLGTR = 4

The principal motivation for the earlier work (ref 1) was to study the shape of slow wave tails associated with atmospheric discharges. This capability is retained in the present report. For this purpose, the particular source function contained in the subroutine TRXMTR is Williams' (ref 7) mean source description for a lightning discharge, which is given by

$$|dI(\omega)| = v_o \sum_{n=1}^4 \frac{A_n}{(\gamma_n + j\omega)^2} \left( 1 - \frac{\exp[-\tau_\rho(\gamma_n + j\omega)]}{1 + \tau_v(\gamma_n + j\omega)} \right) \quad (24)$$

where

$$\left. \begin{array}{ll} A_1 = 16.8 \times 10^3 \text{ A} & \gamma_1 = 5.88 \times 10^5 \text{ s}^{-1} \\ A_2 = 15.35 \times 10^3 \text{ A} & \gamma_2 = 3.03 \times 10^4 \text{ s}^{-1} \\ A_3 = 10^3 \text{ A} & \gamma_3 = 2.0 \times 10^3 \text{ s}^{-1} \\ A_4 = 0.45 \times 10^3 \text{ A} & \gamma_4 = 1.47 \times 10^2 \text{ s}^{-1} \\ \tau_\rho = 43 \text{ } \mu\text{s} & \tau_v = 180 \text{ } \mu\text{s} \\ v_o = 3.5 \times 10^7 \text{ m/s} & \end{array} \right\} \quad (25)$$

The  $A_i$ 's,  $\gamma_i$ 's,  $\tau_\rho$ ,  $\tau_v$ , and  $v_o$  are contained in DATA statements in TRXMTR. The units of amperes for the  $A_i$  expressions and m/s for  $v_o$ , coupled with the channel defined in the following subsection, yield a plotted wave form in units of  $\mu\text{V/m}$ . The printed output is in units of  $\text{dB}/\mu\text{V/m}$ .

#### CHANNEL-EXCITATION FACTORS AND HEIGHT GAINS

Summarized in this subsection are modal excitation and height gain formulas required as input for the mode sum evaluations, which allow for arbitrary elevation (within the guide) and orientation of the transmitter and receiver. The formulas have been given earlier (ref 8) and are included here for completeness. The excitation factor formulas are given in the  $3 \times 3$  matrix below. The column headings apply to excitation of the electric field

components  $E_z$ ,  $E_y$  and  $E_x$  and the row headings apply to excitation by a vertical electric dipole ( $\lambda_v$ ), horizontal broadside electric dipole ( $\lambda_B$ ), and a horizontal end-on electric dipole ( $\lambda_E$ ). The direction of  $z$  is taken positive into the ionosphere with  $x - z$  being the plane of propagation and  $y$  normal to the plane of propagation.

FIELD COMPONENT $\longrightarrow$	$E_z$	$E_y$	$E_x$	
EXCITER				
$\lambda_v$	$S^2 T_1$	$-ST_3$	$ST_1$	
$\lambda_B$	$-ST_3 T_4$	$T_2$	$-T_3 T_4$	(26)
$\lambda_E$	$-ST_1$	$T_3$	$-T_1$	

where

$$T_1 = \frac{(1 + \bar{R}_{11})^2 (1 - \bar{R}_{11} \bar{R}_{11}) S^{1/2}}{\frac{\partial F}{\partial \theta} \bar{R}_{11} D_{11}} \quad (27)$$

$$T_2 = \frac{(1 + \bar{R}_{11})^2 (1 - \bar{R}_{11} \bar{R}_{11}) S^{1/2}}{\frac{\partial F}{\partial \theta} \bar{R}_{11} D_{22}} \quad (28)$$

$$T_3 = \frac{(1 + \bar{R}_{11})(1 + \bar{R}_{11}) \bar{R}_{11} S^{1/2}}{\frac{\partial F}{\partial \theta} D_{12}} \quad (29)$$

$$T_4 = \frac{\bar{R}_{11}}{\bar{R}_{11}} \quad (30)$$

The  $R$  and  $\bar{R}$ 's represent, respectively, elements of the reflection matrix looking into the ionosphere and toward the ground from the same level  $d$  within



the guide. The first subscript refers to the polarization of the incident wave, while the second applies to the polarization of the reflected wave.  $S$  is the sine of an eigenangle,  $\theta$ , and  $\partial F/\partial \theta$  is the derivative of the modal function which is evaluated at an eigenangle. The  $T$  and  $\theta$  expressions are input from the waveguide program of reference 2.

The excitation factors must be supplemented with definitions of height gains. These, along with the definitions of the  $D_{ij}$  expressions, are

$$f_{,,}(z) = \exp\left(\frac{z-d}{a}\right)(F_1 h_1(q) + F_2 h_2(q)) \quad (31)$$

$$f_{\perp}(z) = F_3 h_1(q) + F_4 h_2(q) \quad (32)$$

$$g(z) = \frac{1}{ik} \frac{d}{dz} f_{,,}(z) \quad (33)$$

$$D_{,,} = f_{,,}^2(d) \quad D_{12} = f_{,,}(d)f_{\perp}(d) \quad D_{22} = f_{\perp}^2(d) \quad (34)$$

$$F_1 = - \left\{ H_2(q_0) - i \frac{n_o^2}{N_g^2} \left(\frac{ak}{2}\right)^{1/3} (N_g^2 - S^2)^{1/2} h_2(q_0) \right\} \quad (35)$$

$$F_2 = H_1(q_0) - i \frac{n_o^2}{N_g^2} \left(\frac{ak}{2}\right)^{1/3} (N_g^2 - S^2)^{1/2} h_1(q_0) \quad (36)$$

$$F_3 = - \left\{ h_2'(q_0) - i \left(\frac{ak}{2}\right)^{1/3} (N_g^2 - S^2)^{1/2} h_2(q_0) \right\} \quad (37)$$

$$F_4 = h_1'(q_0) - i \left(\frac{ak}{2}\right)^{1/3} (N_g^2 - S^2)^{1/2} h_2(q_0) \quad (38)$$

$$q = \left(\frac{2}{ak}\right)^{-2/3} \left(C^2 - \frac{2}{a} (h - z)\right) \quad (39)$$

$$H_j(q) = h'_j(q) + \frac{1}{2} \left( \frac{2}{ak} \right)^{2/3} h_j(q) \quad ; \quad j = 1, 2 \quad (40)$$

$$n^2 = 1 - \frac{2}{a}(h - z) \quad (41)$$

$$N_g^2 = \frac{\epsilon}{\epsilon_0} - i \frac{\sigma}{\omega \epsilon_0} \quad (42)$$

where

- C = cosine of the angle of incidence at height h
- k = free space wave number
- $\epsilon/\epsilon_0$  = dielectric constant of the ground
- $\sigma$  = ground conductivity
- $\omega$  = circular radio frequency
- a = earth's radius.

The functions  $h_1$  and  $h_2$  are modified Hankel functions of order 1/3 (which are linearly related to Airy functions), as defined by the computation Laboratory at Cambridge, Massachusetts (ref 9). The primes on these quantities denote derivatives with respect to the argument. Equation 41 is the modified refractive index which equals unity at height, h. The subscript, o, which appears on  $n^2$  in equations 35 and 36, signifies that equation 41 is to be evaluated for  $z = 0$ . Similarly, the subscript o that appears on q in equations 35 through 38 signify that equation 39 is to be evaluated for  $z = 0$ . It should be pointed out that  $f_{,,}$  is the height gain for the vertical electric field  $E_z$ ,  $f_{\perp}$  the height gain for the horizontal electric field component ( $E_y$ ) normal to the plane of propagation, and g the height gain for the horizontal electric field component ( $E_x$ ), which is in the plane of propagation.

Because the imaginary part of the eigenangle in absolute value can become quite large when operating in the ELF range, it proves necessary to avoid overflow, and use of the flat earth analogues of equations 31 through 33 is justified. That is, to replace the height gains by

$$f_{,,}(z) = \exp(ikCz) + \bar{R}_{,,} \exp(-ikCz + 2ikCd) \quad (43)$$

$$f_1(z) = \exp(ikCz) + \bar{R}_1 \exp(-ikCz + 2ikCd) \quad (44)$$

$$g = C [\exp(ikCz) - \bar{R}_1 \exp(-ikCz + 2ikCd)]. \quad (45)$$

When the absolute value of the imaginary part of the eigenangle exceeds  $10^\circ$ , the height gain functions will be computed by equations 43, 44, and 45.

The punched output of the waveguide program of reference 2 is transformed to correspond to  $d = 0$ , independent of the actual  $d$  used in the waveguide run. Therefore, in the present program  $d$  in the above formulas is set to zero.

#### CHANNEL-MODE SUM

In terms of the excitation factors and height gains defined in the previous section, the mode sum for the laterally homogeneous guide may be written as follows

$$E_j(x) = \frac{QM}{[\sin(x/2)]^{1/2}} \sum_n \left\{ \lambda_V^n \cos(\gamma) f_n^n(z_T) + \lambda_B^n \sin(\gamma) \sin(\phi) f_1^n(z_T) \right. \\ \left. + \lambda_E^n \sin(\gamma) \cos(\phi) g^n(z_T) \right\} f_j^n(z_R) e^{-ik(S_n - 1)x} \quad (46)$$

The transmitter coordinates are  $(0, 0, z_T)$  and the receiver coordinates are  $(x, 0, z_R)$ . The mode index is  $n$  and the index  $j$  takes on three values corresponding to the electric field component measured at the receiver.

$$j = 1 \rightarrow z \text{ component} \rightarrow f_1 = f_{11}$$

$$j = 2 \rightarrow y \text{ component} \rightarrow f_2 = f_{12}$$


$$j = 3 \rightarrow x \text{ component} \rightarrow f_3 = g$$

$M$  is the dipole moment in A/m and  $Q$  is

$$Q = 9.023 \times 10^{-8} (if)^{3/2} \quad (47)$$

with  $f$  in Hz. With this value for  $Q$ , the field is in units of  $\mu\text{V/m}$ . If  $M$  is chosen to correspond to 1 kW radiated power when the

dipole source is placed vertically over a perfectly conducting plane, then  $E_j$  is expressed as  $\mu\text{V/m/kW}$  radiated. The angles  $\gamma$  and  $\phi$  measure the orientation of the transmitter relative to the  $x$ ,  $y$ ,  $z$  coordinate system as shown below.

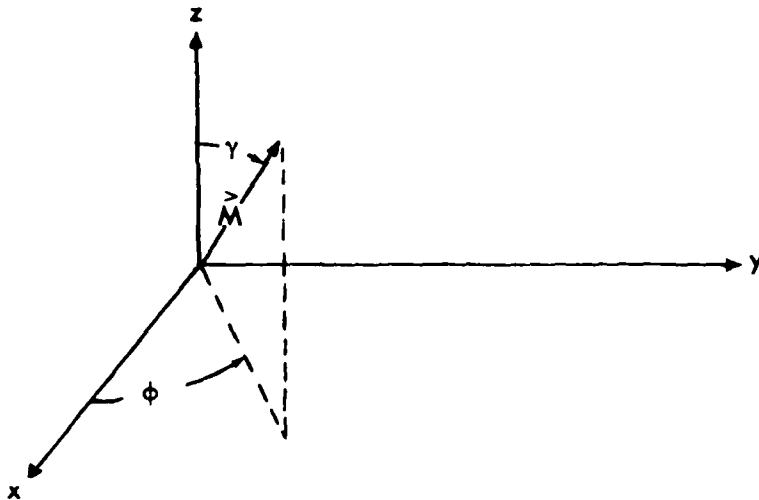

### III. DESCRIPTION OF INPUT

All input to the pulse shape program is read in via the card reader. A listing of a sample input showing the data deck setup is given on pages 20 through 23.

There are two parts to the input. The first part is read in by means of an ASCII FORTRAN name list input format. The name list read in is initiated with a control card NAME in columns 1 through 4. The following variables and arrays may be specified in the name list input.

- NFFT - 2\*\*NFFT is the number of integration intervals in the range (FREQU-FREQL) when using the FFT for the Fourier evaluations. Default value is 11, which is the maximum allowed without changing dimensioning.
  
- FREQU - upper frequency of integration in kilohertz. Default value is 100 kHz.
  
- FREQL - lower frequency of integration in kilohertz. Default value is 0.0 kHz.
  
- INTPRT - flag to control print interval for transmitter, receiver, channel, and product spectra as a function of frequency. For example, the first NPRNT (see below) spectra are printed and thereafter only those spectra for which the frequency index modulo INTPRT equals zero will be printed. Default value is 100.
  
- NPRNT - flag to control print interval for transmitter, receiver, channel and product spectra as a function of frequency. The first NPRNT spectra are printed. Default value is 40.
  
- TAUMAX - controls the latest time in seconds plotted on the output waveform curve. Also controls the maximum time for which the

Fourier integral is calculated when using the Filon routine.  
Default value is 0.002 s.

TAUO - controls the earliest time in seconds plotted on the output waveform curve. Also controls the minimum time for which the Fourier integral is calculated when using the Filon routine. Default value is -0.001 s.

NUMTAU - number of taus between and inclusive of TAUO and TAUMAX for which Filon evaluations are to be made. Default value is 41.

FREQO - carrier frequency in kHz. Default value is 23 kHz.

PULSEW - square-wave pulse width or Gaussian  $e^{-1}$  half width in  $\mu$ s. Default value is 600  $\mu$ s.

FREQ1, FREQ2,

FREQ3 - frequencies in kHz appearing in the receiver function given by equation 6. Default values are FREQ1 = 0.01 kHz, FREQ2 = 0.0 kHz, FREQ3 = 2.5 kHz.

P, Q - exponents appearing in the receiver function given by equation 6. Default values are P = 0.0, Q = 2.0.

RHOMIN - minimum range in km for which mode sum and pulse shape or correlation vector is to be evaluated. Default value is 1000 km.

RHOMAX - maximum range in km for which mode sum and pulse shape or correlation vector is to be evaluated. Default value is 1000 km.

DELRHO - incremental ranges in km between RHOMIN and RHOMAX for which mode sum and pulse shape or correlation vector is to be evaluated. Default value is 1000 km.

- TALT - transmitter altitude in km. Default value is 0, which corresponds to ground-based transmitter.
- RALT - receiver altitude in km. Default value is 0, which corresponds to ground-based receiver.
- INCL - inclination of transmitter from positive z axis in degrees (angle  $\gamma$  in equation 44). Default value is  $0^\circ$ , which corresponds to a vertical antenna.
- THETA - azimuth of transmitter measured counterclockwise from x axis in degrees. Default value is  $0^\circ$ , corresponding to an end on launch.
- ICOMP - singles out electric field component calculated. ICOMP = 1 gives the vertical or  $E_z$  field. ICOMP = 2 gives the  $E_y$  field and ICOMP = 3 gives the  $E_x$  component. Default value is 1.
- IFLGTR - selects input wave form. IFLGTR = 1 gives sequence of square wave pulses. IFLGTR = 2 gives sequence of Gaussian pulses. IFLGTR = 3 gives waveform composed by frequency shift keying (FSK) a carrier with a binary pseudorandom or pseudonoise (PN) sequence of pulses or chips. The FSK modulation index is 0.5. IFLGTR = 4 gives Williams' source for the slow wave tail calculation. Default value is 1.
- INTFLG - selects integration scheme. INTFLG = 0 invokes FFT algorithm and is the normal operating mode. INTFLG  $\neq$  0 invokes the Filon method. Default value is 0.
- CHIPFR - chip frequency ( $f_c$  in eq 19) in kHz to be used with IFLGTR = 3. Default value is 1. kHz.
- NUMPLS - number of pulses in the square wave or Gaussian sequence. Default value is 1.

PULSED - time delay in  $\mu\text{s}$  between square wave or Gaussian pulses.  
Default value is 600.  $\mu\text{s}$ .

I PLOT - flag controlling plots of transmitter and receiver spectra.  
I PLOT = 0 gives no plots. I PLOT  $\neq$  0 gives both spectrum plots.  
Default value is 0.

I PLOT1 - flag controlling plots of channel and product spectra. I PLOT1  
= 0 gives no plots. I PLOT1  $\neq$  0 gives both spectrum plots.  
Default value is 0.

Following the namelist input, the second part of the input, consisting of run identification and mode constant cards, is read in. The read in is initiated by a control card with DATA in columns 1 through 4. Run identification is read in by using a 20A4 format. Mode data appearing on pages 20 through 23 consist of:

R - punched output from waveguide program, which is not used in present program.

F - frequency in kHz.

A - azimuth in degrees relative to geomagnetic north, for which waveguide program was run.

C - codip in degrees of geomagnetic field, for which waveguide program was run.

M - strength of geomagnetic field in Weber/ $\text{m}^2$ , for which waveguide program was run.

S - ground conductivity in Siemens/m.

E - dielectric constant of the ground.



T - punched output from waveguide program, which is not used in present program.

The card containing the above information is followed by two cards for each mode at frequency F. The first card contains the index 1 and the following mode input data:

TR1 - real part of the eigenangle in degrees.

TI1 - imaginary part of the eigenangle in degrees.

TMP1 - excitation factor coefficient  $T_1$  given in equation 27.

TMP2 - excitation factor coefficient  $T_2$  given in equation 28.

The second card contains the index 2 and the following mode input data:

TR1 - real part of the eigenangle in degrees (repeat of input of information on the first card).

TI1 - imaginary part of the eigenangle in degrees (repeat input of information on the first card).

TMP3 - excitation factor coefficient  $T_3$  given in equation 29.

TMP4 - excitation factor coefficient  $T_4$  given in equation 30.

After all data are read in for a given frequency, mode data for the next frequency are read in, etc. After data for all of the frequencies are read in, transfer of the program to its execution phase is initiated by a control card with STAR in columns 1 through 4. Upon completion of the program for the first complete set of data, a new complete set of data can be read in, processed, and executed, etc.

SAMPLE INPUT

```
1 NAME
2 &DATUM
3 INTPRT = 20
4 TAUMAX = 3.E-3
5 IFLGTR = 1,
6 NPRNT = 20
7 TAUO = -1.E-3,
8 NUMPLS = 2
9 FREQ2=23.0,FREQ3=1.667,P=0.0,Q=3.0,
10 IPLOT=1,
11 IPLOT1=1,
12 &END
13 DATA
14 BETA=0.5, HPRIME=87.0
15 R .000 F 10.0000 A 96.848 C 26.610 M 4.680-005 S 4.640+000 E 81.0 T
16 1 89.54299 -1.600041 5.93769233-004-4.33237092-002-2.66095085-013-6.6910
17 2 89.54299 -1.600041 1.71712808-008 1.76637679-007 9.76119950-001-1.6857
18 1 83.15179 -.681192 1.40675269-003-4.30542375-004-1.30534744-010-1.6749
19 2 83.15179 -.681192 4.75598456-010-4.42039628-007 9.76321563-001-1.6914
20 1 76.02858 -.331871-1.81176863-003-5.79840308-002-4.57239026-012-1.6623
21 2 76.02858 -.331871 6.34841966-008 1.00232208-006 9.76755522-001-1.7083
22 1 71.53966 -.972492 3.57218043-003-9.53919356-004-6.43127843-010-5.4550
23 2 71.53966 -.972492-1.48832975-009-1.55049825-006 9.77606788-001-1.7225
24 1 64.67405 -.420081-5.74631611-003-5.44617977-002-5.96155712-011-1.2776
25 2 64.67405 -.420081 5.05197228-007 2.73988729-006 9.79136109-001-1.7517
26 1 60.43294 -1.736032 8.06905213-003-3.46847059-003-1.51790046-009-6.2679
27 2 60.43294 -1.736032-3.41322277-007-3.64204141-006 9.81437340-001-1.7637
28
29 R .000 F 15.0000 A 96.848 C 26.610 M 4.680-005 S 4.640+000 E 81.0 T
30 1 89.87716 -4.447931 7.97650921-006-1.86808831-002-1.36770776-012-1.1737
31 2 89.87716 -4.447931 6.98923905-008 1.73850939-007 9.54479575-001-9.2540
32 1 89.42791 -2.627812 1.81225575-003-1.87533820-003-3.94927788-011-2.0386
33 2 89.42791 -2.627812-1.05341859-007-3.10618208-007 9.54131447-001-9.2843
34 1 82.12311 -.339621-1.10011261-003-4.10230709-002-3.93972420-012-5.8973
35 2 82.12311 -.339621 1.41023918-007 5.33180142-007 9.52227563-001-9.4214
36 1 78.92260 -.345582 2.13041180-003-1.65751675-003-2.50544481-010-4.5708
37 2 78.92260 -.345582-2.25597727-007-8.10605862-007 9.50611316-001-9.5459
38 1 74.36239 -.423671-2.86681467-003-3.58314899-002-3.07619798-011-4.3661
39 2 74.36239 -.423671 4.13103759-007 1.35826212-006 9.47571643-001-9.8035
40 1 71.51556 -.501782 4.20202594-003-3.25397411-003-6.03080086-010 2.5054
41 2 71.51556 -.501782-5.38389344-007-1.75630743-006 9.45343502-001-1.0014
42 1 66.95303 -.501101-5.60380652-003-3.21827605-002-1.31560195-010-1.6328
43 2 66.95303 -.501101 9.72961132-007 2.50720018-006 9.41323511-001-1.0420
44 1 64.15047 -.766432 7.26349233-003-6.12409366-003-1.05415335-009 1.3424
45 2 64.15047 -.766432-1.14101552-006-3.06261120-006 9.39071193-001-1.0742
46 1 59.43416 -.548001-8.34006036-003-2.83699052-002-3.93695111-010-3.9467
47 2 59.43416 -.548001 1.91310056-006 3.72124325-006 9.34739329-001-1.1304
48 1 56.38749 -1.181612 1.03418070-002-1.02234199-002-1.56078298-009 3.4352
49 2 56.38749 -1.181612-2.09625628-006-4.50653664-006 9.33384195-001-1.1776
50
51 R .000 F 20.0000 A 96.848 C 26.610 M 4.680-005 S 4.640+000 E 81.0 T
52 1 89.95078 -5.509952-1.93003481-004-3.08029371-003-5.71833862-012-7.4570
53 2 89.95078 -5.509952 9.08982800-008 1.00341518-007 9.70444761-001-3.0651
54 1 89.72677 -4.972712 1.63144470-003-5.19614783-003-7.55528420-012-3.4144
```

55	2	89.72677	-4.972712-1.15447172-007-1.70629631-007	9.70000498-001-3.0777	
56	1	85.57822	-.374531-9.40172227-004-3.21498699-002-2.93168319-012-3.6242		
57	2	85.57822	-.374531 1.90888923-007 3.71334362-007	9.66683730-001-3.0583	
58	1	83.08694	-.240632 2.02812662-003-2.06106337-003-1.15471073-010	5.1048	
59	2	83.08694	-.240632-2.19895471-007-5.45562628-007	9.64558974-001-3.0479	
60	1	79.12334	-.397391-2.51086711-003-2.78670846-002-2.04451764-011-2.5083		
61	2	79.12334	-.397391 3.51979452-007 9.05249671-007	9.59300555-001-3.0774	
62	1	77.11312	-.275102 3.30613977-003-3.18349389-003-3.01428101-010	2.1585	
63	2	77.11312	-.275102-4.72247425-007-1.10789632-006	9.55758922-001-3.0714	
64	1	73.44476	-.459411-4.59294498-003-2.38388672-002-8.37238039-011-9.7335		
65	2	73.44476	-.459411 7.61633153-007 1.64506844-006	9.47922789-001-3.1771	
66	1	71.63047	-.376812 5.62715752-003-5.50687622-003-5.23718499-010	9.5978	
67	2	71.63047	-.376812-9.37261717-007-1.88752817-006	9.43763837-001-3.2154	
68	1	67.93610	-.511771-7.17936538-003-1.97459643-002-2.53456083-010-2.5509		
69	2	67.93610	-.511771 1.47960783-006 2.42963196-006	9.33020763-001-3.4446	
70	1	66.14730	-.531512 8.40076327-003-9.21373558-003-7.26669051-010	2.5910	
71	2	66.14730	-.531512-1.73095953-006-2.71428090-006	9.27492820-001-3.5861	
72	1	62.41710	-.555411-9.07247630-003-1.51738158-002-6.00887652-010-4.8687		
73	2	62.41710	-.555411 2.46706023-006 2.97335941-006	9.15089674-001-3.9828	
74	1	60.47119	-.741961 1.05556111-002-1.39936338-002-8.50278722-010	5.0284	
75	2	60.47119	-.741961-2.82933254-006-3.32145967-006	9.08521205-001-4.3171	
76	1	56.76943	-.610202-9.80309338-003-1.11616928-002-1.13383616-009-7.4866		
77	2	56.76943	-.610202 3.50012604-006 3.21396806-006	8.94910932-001-4.9218	
78					
79	R	.000 F	25.0000 A 96.848 C 26.610 M 4.680-005 S 4.640+000 E 81.0 T		
80	1	89.95961	-6.296002 4.14965702-005-2.84423062-004-2.65959360-012-5.6880		
81	2	89.95961	-6.296002 1.78132298-008 2.11544882-008	9.99736615-001-4.8076	
82	1	89.75731	-5.702361 6.66626482-004-2.24545391-003-1.42592036-012-4.5403		
83	2	89.75731	-5.702361-2.75980718-008-5.24136694-008	9.98948187-001-4.6248	
84	1	88.74632	-.740711-1.14792565-003-2.27329135-002-3.50932488-012-3.4240		
85	2	88.74632	-.740711 1.37327154-007 3.05298592-007	9.95857358-001-2.7427	
86	1	86.21623	-.323792 2.80416722-003-3.36569911-003-5.43727906-011	1.7317	
87	2	86.21623	-.323792-2.14213904-007-4.40146156-007	9.94571388-001-2.1050	
88	1	82.17971	-.352921-2.85408430-003-2.34048092-002-1.54511952-011-1.7795		
89	2	82.17971	-.352921 3.04256552-007 6.64677630-007	9.89881411-001-7.2338	
90	1	80.61306	-.235442 3.28247802-003-3.42158275-003-1.68198547-010	1.6271	
91	2	80.61306	-.235442-3.93487753-007-8.10396045-007	9.87260617-001	1.4355
92	1	77.39001	-.375861-4.55183111-003-1.89235786-002-6.26825926-011-6.8954		
93	2	77.39001	-.375861 6.39205197-007 1.20104490-006	9.79809105-001	4.2323
94	1	76.07293	-.293152 5.18735842-003-5.37725317-003-2.98127936-010	6.9079	
95	2	76.07293	-.293152-7.58520216-007-1.32923716-006	9.76186506-001	5.9032
96	1	72.92168	-.393581-6.79070043-003-1.46260866-002-1.92001999-010-1.8119		
97	2	72.92168	-.393581 1.23595613-006 1.69775085-006	9.65308584-001	9.1862
98	1	71.71231	-.392682 7.51004531-003-8.79517768-003-3.95414586-010	1.8395	
99	2	71.71231	-.392682-1.39636245-006-1.81699518-006	9.60419364-001	1.0552
100	1	68.56366	-.399602-8.11186887-003-9.74748202-003-4.66080674-010-3.3417		
101	2	68.56366	-.399602 2.04390165-006 1.87442609-006	9.45522405-001	1.3631
102	1	67.33788	-.523181 8.86612176-003-1.34191969-002-3.99816361-010	3.3996	
103	2	67.33788	-.523181-2.25887723-006-1.97178016-006	9.38771591-001	1.3818
104	1	64.22144	-.410722-7.88689498-003-5.51686942-003-8.83920132-010-4.6723		
105	2	64.22144	-.410722 2.77423089-006 1.66314987-006	9.19652522-001	1.5219
106	1	62.85581	-.666111 8.66894366-003-1.77447477-002-3.15086311-010	4.7624	
107	2	62.85581	-.666111-3.06723743-006-1.72537347-006	9.10496563-001	1.2858
108	1	59.81876	-.444912-7.08291441-003-2.62661430-003-1.40096686-009-5.7675		
109	2	59.81876	-.444912 3.35079508-006 1.28801229-006	8.88060510-001	1.0387
110	1	58.20465	-.807741 7.90575973-003-2.10266041-002-1.87648097-010	5.8927	
111	2	58.20465	-.807741-3.76355356-006-1.29681153-006	8.76700148-001	3.7316

112

113 R .000 F 30.0000 A 96.848 C 26.610 M 4.680-005 S 4.640+000 E 81.0 T  
114 1 89.95817 -6.801582 9.21416370-006-4.06682093-005-7.33488398-013-2.8557  
115 2 89.95817 -6.801582 3.33612060-009 4.35358660-009 1.01745796+000-1.3958  
116 1 89.77098 -6.172221 2.33388033-004-5.90389849-004-4.19298588-013-2.0551  
117 2 89.77098 -6.172221-6.15653212-009-1.59281199-008 1.01659237+000-9.6001  
118 1 89.86359 -3.077971-1.35654240-003-9.89436009-003-7.60637224-012-2.9350  
119 2 89.86359 -3.077971 1.75959459-007 2.22063330-007 1.01431617+000 1.4027  
120 1 89.29216 -1.802442 3.43013523-003-7.66506500-003-2.01165827-011 1.7334  
121 2 89.29216 -1.802442-2.37264798-007-3.33145127-007 1.01360975+000 1.7748  
122 1 84.46494 -.325201-3.52030885-003-2.00907697-002-1.34843686-011-1.4141  
123 2 84.46494 -.325201 2.84209779-007 5.59975376-007 1.01064682+000 4.2818  
124 1 83.12847 -.256792 3.77914889-003-4.37141588-003-9.63985307-011 1.3105  
125 2 83.12847 -.256792-3.57363756-007-6.55233706-007 1.00918959+000 5.6036  
126 1 80.14352 -.314231-4.87920851-003-1.52311159-002-5.40644622-011-5.5223  
127 2 80.14352 -.314231 5.79850294-007 9.35443637-007 1.00445074+000 9.3897  
128 1 79.07973 -.287462 5.28538768-003-6.02913019-003-1.77346710-010 5.3588  
129 2 79.07973 -.287462-6.64902906-007-1.01968099-006 1.00235936+000 1.1205  
130 1 76.30567 -.303281-6.47681038-003-1.05080334-002-1.66328987-010-1.3305  
131 2 76.30567 -.303281 1.08696990-006 1.20814860-006 9.95344214-001 1.6763  
132 1 75.35715 -.372092 6.98046980-003-9.46757186-003-2.19153317-010 1.3472  
133 2 75.35715 -.372092-1.19382139-006-1.27433299-006 9.92226020-001 1.8781  
134 1 72.65670 -.283522-6.66976604-003-5.72501693-003-3.90159866-010-2.1732  
135 2 72.65670 -.283522 1.65506199-006 1.12109299-006 9.81998667-001 2.6303  
136 1 71.70666 -.484141 7.19145511-003-1.37139540-002-1.82826587-010 2.2030  
137 2 71.70666 -.484141-1.78910638-006-1.15557695-006 9.76869076-001 2.8041  
138 1 69.08797 -.269702-5.52105560-003-2.30829942-003-6.97587266-010-2.6241  
139 2 69.08797 -.269702 2.01539578-006 7.55881238-007 9.61933985-001 3.6731  
140 1 68.03986 -.600941 6.02721120-003-1.69323110-002-9.76922293-011 2.6547  
141 2 68.03986 -.600941-2.18522109-006-7.43441461-007 9.53540497-001 3.6948  
142 1 65.52886 -.272232-4.25863202-003-2.97679551-004-1.05524151-009-2.8148  
143 2 65.52886 -.272232 2.21227225-006 3.15480715-007 9.32598367-001 4.4015  
144 1 64.31916 -.711151 4.72565473-003-1.89521380-002 1.70844382-012 2.8158  
145 2 64.31916 -.711151-2.43150367-006-2.37438300-007 9.20637153-001 4.0183  
146 1 61.92816 -.294362-3.26558537-003 9.93770678-004-1.46713304-009-2.9326  
147 2 61.92816 -.294362 2.38145702-006-1.71861332-007 8.94900113-001 4.1165  
148 1 60.51619 -.813321 3.65956590-003-2.04236524-002 1.19203678-010 2.8392  
149 2 60.51619 -.813321-2.66933711-006 3.42168367-007 8.81666422-001 3.0688  
150 1 58.24503 -.339362-2.46994873-003 2.02460142-003-1.95284630-009-3.0211  
151 2 58.24503 -.339362 2.60870254-006-7.50150313-007 8.56219366-001 2.2998  
152 1 56.59863 -.906611 2.72667289-003-2.18211829-002 2.76802057-010 2.7023  
153 2 56.59863 -.906611-2.98982195-006 1.05839401-006 8.45654584-001 6.2300

154

155 R .000 F 35.0000 A 96.848 C 26.610 M 4.680-005 S 4.640+000 E 81.0 T  
156 1 89.95578 -7.154792 1.71951611-006-6.65459652-006-1.70822876-013-1.1727  
157 2 89.95578 -7.154792 6.26939424-010 8.70561630-010 1.02251831+000-1.1474  
158 1 89.78312 -6.518361 6.77289499-005-1.37311265-004-1.28066713-013-7.8820  
159 2 89.78312 -6.518361-1.31226668-009-4.56250016-009 1.02154364+000-7.4143  
160 1 89.93700 -4.242822 3.86689535-005-1.94379015-003-7.12259201-012-4.0835  
161 2 89.93700 -4.242822 7.92866732-008 8.55532294-008 1.01944663+000 1.1845  
162 1 89.62104 -3.394181 1.97066873-003-8.00630264-003-5.41413740-012-4.7556  
163 2 89.62104 -3.394181-1.22145323-007-1.70501769-007 1.01870005+000 1.4662  
164 1 86.43846 -.313841-3.94388248-003-1.61767765-002-1.34537301-011-1.0957  
165 2 86.43846 -.313841 2.85340914-007 4.50308416-007 1.01656783+000 3.2084  
166 1 85.15994 -.320462 4.36410488-003-6.50112930-003-5.23506863-011 1.0193  
167 2 85.15994 -.320462-3.55639354-007-5.33603441-007 1.01554948+000 3.9114  
168 1 82.24972 -.272241-5.03783813-003-1.21501258-002-4.91220250-011-4.0359

169	2	82.24972	-	.272241	5.43721526-007	7.28336296-007	1.01222657+000	6.5597
170	1	81.31095	-	.298492	5.24895213-003	7.24678044-003	-1.05158253-010	4.0276
171	2	81.31095	-	.298492	-6.11081887-007	-7.89565838-007	1.01078829+000	7.6739
172	1	78.80987	-	.244612	-5.64404484-003	-7.40134291-003	-1.44906575-010	-9.1144
173	2	78.80987	-	.244612	9.33826691-007	8.43385997-007	1.00627670+000	1.1729
174	1	77.97459	-	.365431	5.98990329-003	-1.03043913-002	-1.21564057-010	9.2064
175	2	77.97459	-	.365431	-1.01311328-006	-8.85114169-007	1.00417314+000	1.3088
176	1	75.62908	-	.217262	-4.96455305-003	-3.48515713-003	-3.13408421-010	-1.3144
177	2	75.62908	-	.217262	1.26447735-006	6.82723261-007	9.98098433-001	1.9012
178	1	74.77820	-	.456311	5.33993304-003	-1.34751227-002	-8.85680166-011	1.3299
179	2	74.77820	-	.456311	-1.35897561-006	-6.93880402-007	9.94550772-001	2.0513
180	1	72.56655	-	.199072	-3.68672452-003	-1.12099861-003	-5.27402795-010	-1.4485
181	2	72.56655	-	.199072	1.40992418-006	3.86078096-007	9.85836089-001	2.8270
182	1	71.62053	-	.548311	4.04662930-003	-1.54822026-002	-3.42179783-011	1.4585
183	2	71.62053	-	.548311	-1.52351126-006	-3.53674118-007	9.79646951-001	2.9281
184	1	69.54959	-	.193242	-2.58837634-003	1.79758459-004	-7.71987724-010	-1.4315
185	2	69.54959	-	.193242	1.45006429-006	5.46745862-008	9.66708526-001	3.7370
186	1	68.46246	-	.634701	2.90467023-003	-1.66300139-002	2.58675477-011	1.4094
187	2	68.46246	-	.634701	-1.58884565-006	3.66019841-008	9.57122207-001	3.5885
188	1	66.53448	-	.199332	-1.73459633-003	9.74064271-004	-1.04989406-009	-1.3279
189	2	66.53448	-	.199332	1.46168267-006	-3.18594022-007	9.39793691-001	4.0768
190	1	65.27999	-	.715771	1.97376651-003	-1.74074376-002	9.42113323-011	1.2209
191	2	65.27999	-	.715771	-1.63377435-006	4.88440357-007	9.28504840-001	3.4118
192	1	63.49120	-	.217322	-9.96977105-004	1.55366775-003	-1.36881209-009	-1.1086
193	2	63.49120	-	.217322	1.48137963-006	-7.67130373-007	9.10345115-001	3.2940
194	1	62.05259	-	.791751	1.10823596-003	-1.80875934-002	1.79295710-010	8.2145
195	2	62.05259	-	.791751	-1.69562365-006	1.04387406-006	9.01143454-001	2.1334
196	1	60.39516	-	.248472	-2.39132431-004	2.07731486-003	-1.74026334-009	-6.7406
197	2	60.39516	-	.248472	1.52686277-006	-1.33272954-006	8.86461414-001	1.5787
198	1	58.75931	-	.861241	1.39434616-004	-1.88362205-002	2.94850606-010	2.9668
199	2	58.75931	-	.861241	-1.78866654-006	1.76271519-006	8.80726665-001	2.4958
200	1	57.22259	-	.296182	6.81471960-004	2.65892252-003	-2.18246249-009	1.6829
201	2	57.22259	-	.296182	1.60517165-006	-2.07563082-006	8.70145038-001	-3.8564
202								
203				END				
204				START				

#### IV. PROGRAM LAYOUT

This section describes only the basic features of the pulse shape program listed in the appendix. In particular, plot and label routines PLSPEC, BORDER, SYMBOL, CURVE, PLOT, WOPLLOT, PLOT12, PLOT3 and PLLABL, are not described.

MAIN controls the program flow. Subroutines in the order of their call are described below:

##### SUBROUTINE INPUT

INPUT, called from MAIN, reads in NAMELIST and mode data.

##### SUBROUTINE HTGAIN(IOPT, FREQ, SIGMA, EPSR, ALPHA, NRMODE, TP, Z, HG)

HTGAIN, called from MAIN, evaluates the modal height gain functions that appear in equation 46. The arguments of HTGAIN are:

- IOPT - option flag set for 1 in present program.
- FREQ - frequency (kHz).
- SIGMA - ground conductivity (s/m).
- EPSR - real dielectric constant of the ground.
- ALPHA - earth curvature constant ( $3.14 \times 10^{-4} \text{ km}^{-1}$ ).
- NRMODE - number of modes at any one of the input frequencies.
- TP - complex ground eigenangle in degrees.
- z - altitude at which height gain is evaluated (km).
- HG - height gain.

SUBROUTINE MDHNKL(Z, H1, H2, H1PRME, H2PRME, THETA, IDBG)

This subroutine is called by HTGAIN. It evaluates the modified Hankel functions of order 1/3 and their derivatives according to the methods of reference 9. The arguments of MDHNKL are:

Z - argument of modified Hankel functions of order 1/3 and their derivatives.

H1, H2 - modified Hankel functions of order 1/3.

H1PRME,

H2PRME - derivatives of modified Hankel functions of order 1/3.

THETA - not used in present program.

IDBG - not used in present program.

SUBROUTINE FUNSPL(MD, LF)

FUNSPL is called from MAIN. Inputs to FUNSPL are a mode index, MD, which takes on values 1 through the maximum number of modes read in for a given frequency; and the index, LF, for the quantity that is to be approximated as a function of frequency by a cubic spline. LF takes on the integer values 1 through 4.

SUBROUTINE FUNCVF(MD, LF)

This subroutine called by FUNSPL selects for LF = 1(2), the real (imaginary) part of the excitation factor for fitting to a cubic spline. If LF = 3(4), the real (imaginary) part of the eigenangle is selected for fitting to a cubic spline.

SUBROUTINE SPLINE(X, Y, B, C, D, N)

This subroutine called from FUNSPL determines the coefficients B, C, D of a cubic spline interpolating the given curve [X(I), Y(I), I = 1, 2, . . . , N]. If X(I).LE.XX.LE.X(I+1) and H = XX - X(I), then the interpolated value at XX is  $F(XX) = Y(I) + B(I) * H + C(I) * H ** 2 + D(I) * H ** 3$ . The interpolated value is evaluated by using the function SPEVAL discussed subsequently.

SUBROUTINE TPLOT(FREQ, FL, FO, FC, DELTAF, PULSEW, PULSED, NUMPLS, IFLGTR, NRPT1, NF)

TPLOT, called from MAIN, sets up the arrays for plotting the transmitter spectrum. The arguments of TPLOT are as follows:

- FREQ - input frequency in Hz.
- FL - lowest frequency in Fourier integral evaluation.
- FO - carrier frequency in Hz.
- FC - chip frequency in Hz.
- DELTAF - frequency interval in Hz, at which transmitter spectrum is calculated.
- PULSEW - pulse width in  $\mu$ s when used with IFLGTR = 1; and 1/e pulse half width in  $\mu$ s when used with IFLGTR = 2.
- PULSED - pulse delay in  $\mu$ s (used with IFLGTR = 1 or 2).
- NUMPLS - number of pulses (used with IFLGTR = 1 or 2).
- IFLGTR - transmitter flag. IFLGTR = 1 corresponds to sequence of square wave pulses. IFLGTR = 2 corresponds to sequence of Gaussian pulses. IFLGTR = 3 corresponds to a differential phase-encoded



signal waveform composed by frequency shift keying (FSK) a carrier frequency with a pseudonoise sequence of pulses or chips. The FSK index is 0.5. IFLGTR = 4 corresponds to Williams' source for slow wave tail calculation.

NRPT1 - number of frequency points between FU and FL used in Fourier evaluation (FU is the highest frequency in Fourier integral evaluations).

NF - the number of frequencies read in.

SUBROUTINE TRXMTR(K, F, FO, FC, PULSEW, PULSED, NUMPLS, IFLGTR, LABELT, XMTR)

TRXMTR, called from TPLLOT, evaluates the transmitter spectrum. The arguments of TRXMTR are:

K - integer index of frequencies for which transmitter spectrum is evaluated.

F - frequency in Hz.

LABELT - transmitter label.

XMTR - transmitter evaluation.

The remaining arguments are defined in TPLLOT.

SUBROUTINE RPLLOT(FREQ, FL, F1, F2, F3, DELTAF, P, Q, NRPT1, NF)

RPLLOT, called from MAIN, sets up the arrays for plotting the receiver spectrum. The arguments of RPLLOT are:

F1, F2, F3 - frequencies  $f_1$ ,  $f_2$  and  $f_3$ , respectively, in equation 6.

P, Q - exponents P and Q in equation 6.

All other arguments are the same as TPLOT. RPLOT calls RECVR and, like TPLOT, calls the controlling plot routine PLSPEC, which, in turn, calls BORDER, SYMBOL, CURVE, and PLOT.

SUBROUTINE RECVR(K, F, FO, F1, F2, F3, LABELR, P, Q, RCVR)

Called from RPLOT, this subroutine calculates the receiver spectrum according to equation 6.

K - integer index of frequency for which receiver spectrum is evaluated.

F - frequency in Hz.

FO - carrier frequency in Hz.

F1, F2,

F3 - frequencies  $f_1$ ,  $f_2$  and  $f_3$  of equation 6.

LABELR - receiver label.

P, Q - exponents of equation 6.

RCVR - receiver evaluation.

SUBROUTINE CPLOT(FREQ, FL, FO, FC, DELTAF, NRPT1, NF, BANDW, RHO)

CPLOT, called from MAIN, sets up the arrays for plotting the channel spectra and the product spectra consisting of the transmitter, receiver, and channel. All arguments, except RHO, have been previously defined in TPLOT and RPLOT. The argument RHO is:

RHO - range (km).

CPLOT calls CHANEL and, like TPLOT, calls the controlling plot routine PLSPEC, which, in turn, calls BORDER, SYMBOL, CURVE, and PLOT as well as a utility labeling subroutine called PLLABL.

SUBROUTINE CHANEL(F, RHO, CHNL)

CHANEL, called from CPLOT, evaluates the channel spectra for frequency F (Hz) and range RHO (km) according to equation 46. The channel evaluation is placed in CHNL.

FUNCTION SPEVAL(XVAL, X, Y, B, C, D, N, INIT)

SPEVAL, called from CHANEL, evaluates the interpolating cubic spline for the data [X(I), Y(I), I = 1, . . . , N at XVAL]. INIT is an estimate of the interval where XVAL lies, X(INIT) .LE. XVAL .LE. X(INIT + 1), but need not be used. Set INIT = 0 if there is no estimate. On return, INIT will contain the interval number.

SUBROUTINE NLOGN(N, X, Y, SIGNT, A, B)

Called from MAIN when INTFLG .EQ. 0, NLOGN calculates integrals of the form (s = SIGNT).

$$\begin{aligned} & \exp[-i2\pi sA\tau] \int_A^B (x(f)+iy(f)) \exp(i2\pi s f\tau) df \\ &= \int_0^{B-A} (x(f+A)+iy(f+A)) \exp(i2\pi s f\tau) df \end{aligned} \quad (48)$$

by the fast Fourier transform technique of Cooley and Tukey (ref 10). This makes use of digital evaluations at the frequencies

$$f(L) = \frac{L-1}{2^n} (B-A) ; L = 1, 2, \dots, 2^n \quad (49)$$

and the method yields evaluations for the times

$$\tau(K) = \frac{K-1}{B-A} ; K = 1, 2, \dots, 2^n \quad (50)$$

Real and imaginary parts of the integral are then stored in X(K) and Y(K), respectively. The weight factors and endpoint corrections supplied in the

earlier work (ref 1) were in error and have been abandoned in the present work. Though the consequent error in the output parameter range of interest (TAUO to TAUMAX) in reference 1 is quite small, it is strongly recommended that the present program be used instead of reference 1 even though the interest may be solely in vertical E at the ground produced by a ground-based transmitter.

The quantity  $s = \text{SIGNT}$  takes on the values  $\pm 1$  and simply allows for plus or minus transforms as desired. It should be observed that although the region of significance of the integrand of equation 48 may be quite small, the integration limits A, B may of necessity be quite large in order to achieve a desired time resolution (see eq 50). N must be chosen to give small enough step sizes in the region where the integrand is significant. Specifically, step sizes must be small compared with distances (in frequency units) over which the integrand changes appreciably.

SUBROUTINE FILON(N, X, Y, TAU, FU, FL, SUM, SUMP)

Called from MAIN when INTFLG .NE. 0, FILON calculates integrals of the form


$$\int_{FL}^{FU} (x(f)+iy(f)) \exp(2\pi i t f) df \quad (51)$$

by Filon's method (ref 4), using  $2^N + 1$  point evaluations in the range  $FU - FL$ . In particular, SUM represents the N point evaluation and SUMP represents the  $2^{N-1} + 1$  point evaluation. The relative error  $|SUM-SUMP|/|SUM|$  is calculated and printed in MAIN. As discussed in the introduction, the evaluation is considerably slower than can be achieved by using NLOGN, but the method is used to give a measure of the error in the evaluation as noted above. Note that FL and FU are chosen on the basis that the integrand be sufficiently small at the end points, unlike the situation with NLOGN, where the limits are chosen on the basis of the time resolution required. Accordingly, the number of point evaluations (determined by N) using the Filon method can be appreciably smaller than the point evaluations using NLOGN. Despite this tradeoff, the NLOGN routine appears to be appreciably faster.

SUBROUTINE INITWF(IFLGTR, PULSEW, PULSED, NUMPLS, TAUO, TAUMAX, PLOTX3  
PLOTY3)

Called from MAIN, this subroutine calculates the input waveforms for IFLGTR (eq 1 or 2). PULSEW, PULSED, NUMPLS and IFLGTR have been previously defined (see, e.g., TPLOT). TAUO and TAUMAX are the minima and maxima abscissa times in ms on the output waveform plots. PLOTX3 and PLOTY3 contain the output plot array data.

A chart showing the essential flow of the pulse program appears below.

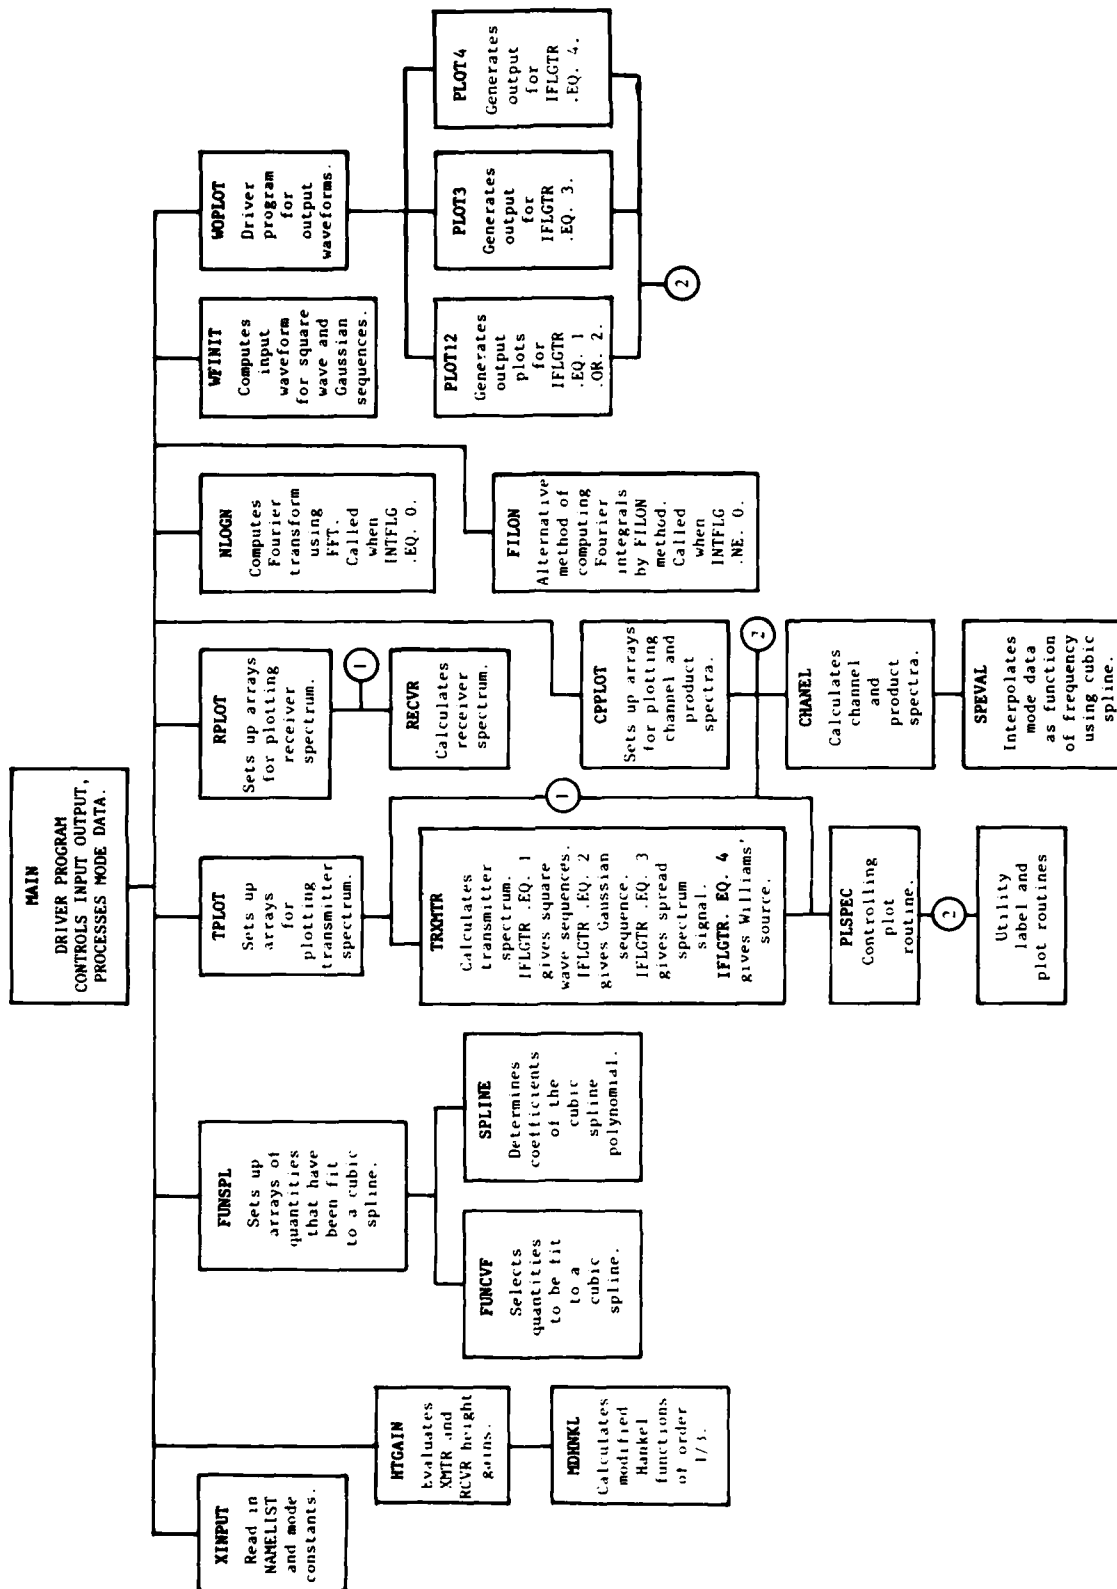

## V. DESCRIPTION OF OUTPUT

The sample output shown below begins with the namelist output followed by the run identification. The mode data come next. For each frequency (given in increasing order), the number of modes, the real and imaginary parts of the eigenangle, and their modal equivalents of attenuation rate and phase velocity normalized to free-space velocity are listed.

The calculated output of the pulse shape program is presented following the sample output. The transmitter, receiver, channel, and product (XMTR \* RCVR \* CHNL) spectra are given as a function of frequency. Not all 2049 (i.e.,  $2^{\text{NFFT}} + 1$  with  $\text{NFFT} = 11$ ) lines are listed. The printout is controlled by the namelist variables NPRNT and INTPRT.

Following the spectra output, output is presented pertaining to the envelope of the time signature of the output waveform,  $G(x, z_R, t; z_T)$ , given by equation 1. Specifically, the time TAU in seconds is given, along with the envelope in dB/ $\mu\text{V}/\text{m}/\text{kW}$  in the spirit of the normalization discussed in section II.

The signal envelope in absolute units for times less than  $-0.3$  ms should be identically zero (or  $-\infty$  on a dB scale). The fact that this is not so is believed to be associated with frequency truncation effects and/or discontinuities in the third and higher derivatives of the interpolated mode data. The principal outputs of the program are the plots. In the present instance, figures 1 through 6 are generated. These are

1. Transmitter spectrum versus frequency.
2. Receiver spectrum versus frequency.
3. Channel spectrum versus frequency.
4. Product (transmitter \* receiver \* channel) spectrum versus frequency.
5. Input and output envelopes normalized to unity.
6. Waveform output, including carrier frequency normalized to unity.

Shown in figure 5 is the maximum of the envelope (SIGNAL MAX) expressed in units of dB/ $\mu$ V/m/kW. The right-hand scale on the plot gives the envelope in dB relative to SIGNAL MAX.

Figures 1 through 6 just discussed apply to IFLGTR = 1 (i.e., square-wave envelopes). Figure 7 is the envelope output for IFLGTR = 2 (i.e., Gaussian envelope output). Figures 8 and 9 show output for IFLGTR = 3 (i.e., the correlator output for an MSK format). Figure 8 shows the amplitude of the correlator output and figure 9 the phase of the correlation vector given by equation 23. It can be observed from the labels that figures 8 and 9 apply to a different ionospheric profile (i.e., channel) than that used for figures 1 through 7.

Corresponding to IFLGTR = 4, figure 10 shows the transmitter spectrum for Williams' source, figure 11 shows a representative receiver spectrum used for slow tail measurements, figure 12 shows the channel spectrum, and figure 13 gives the product spectrum. Lastly, the slow wave tail output for the Williams' source is shown in figure 14.



SAMPLE OUTPUT

NAME  
\*DATUM  
NFFT = 11111000  
FREQ1 = .10000000+003.FREQ2 = .10000000+002.FREQ3 = .10000000+001.FREQ4 = .10000000+000  
FREQ5 = .10000000+000.FREQ6 = .10000000+000.FREQ7 = .10000000+000.FREQ8 = .10000000+000.FREQ9 = .10000000+000  
RALT = .00000000  
RINT = .00000000  
RTHETA = .00000000  
RNUMPLS = 41.CHIPTFR = .10000000+001.NUMPLS = 2.PULSED = .60000000+003.  
MUNIT = 20.TAUM = .10000000+000.MUTAU = .10000000+001.P = .00000000  
FREQ1 = .10000000+001.FREQ2 = .10000000+002.FREQ3 = .10000000+001.PLOT = 1.  
\*PLOT  
\$END  
DATA  
BETA=0.5, MPRIME=67.0  
START

NMF	FREQ KHZ	THETA DEGREES	TETA DEGREES	ATT DB	PHVC		
6	10.00000	89.54299	-1.60004	.40555	.90054		
		83.15179	-.69119	2.58080	1.00711		
		76.92858	-.33187	2.54885	1.02017		
		71.53366	-.97209	8.70451	1.05110		
		64.67405	-.42003	5.70052	1.10630		
		60.43294	-1.73603	27.22175	1.14919		
		10	15.00000	89.57716	-4.44793	.46195	.99700
				89.32791	-2.52781	1.29032	.99900
				82.12311	-.33922	2.21823	1.00951
				78.92260	-.34558	3.16450	1.01397
74.36339	-.42357			5.44270	1.03341		
71.51556	-.50178			7.52211	1.05436		
66.53503	-.50110			9.34961	1.08870		
64.18047	-.76643			15.92681	1.11108		
59.43416	-.54809			13.20158	1.16133		
56.38749	-1.18161			31.17653	1.20051		
13	20.00000	89.25078	-5.50995	.30125	.90559		
		89.72577	-4.97271	1.50879	.90206		
		85.57822	-.37453	1.84493	1.00236		
		83.08694	-.24063	1.84048	1.00731		
		79.12331	-.39739	4.70506	1.01827		
		77.11312	-.27510	3.80854	1.02983		
		75.44476	-.45941	8.31843	1.04321		
		71.67017	-.37681	7.54503	1.05357		
		67.93610	-.51177	12.21029	1.07898		
		66.14730	-.53151	13.00843	1.08314		
16	25.00000	89.95061	-6.29600	.25325	.90399		
		89.72731	-5.70236	1.90175	.90596		
		88.76632	-.74071	1.29722	1.00616		
		86.21623	-.32379	1.64725	1.00217		
		82.17971	-.35292	3.81440	1.00937		
		80.61306	-.27514	3.01024	1.01350		
		77.34001	-.27586	6.51787	1.02470		
		76.67293	-.24315	5.50454	1.03027		
		72.92168	-.30353	9.18132	1.04611		
		71.71231	-.32263	9.78758	1.05317		
20	30.00000	89.25817	-6.92159	.47740	.90300		
		89.73008	-6.11472	2.39218	.90323		
		89.60269	-3.07797	.84482	.99956		
		89.23216	-1.30244	2.19281	.99378		
		84.45494	-.32520	2.50060	1.00157		

83.12947	- .25679	2.92851	1.00722
80.14352	- .31425	5.12723	1.01497
79.07973	- .29735	5.19061	1.01263
75.30567	- .30328	6.84332	1.02324
75.35715	- .37209	8.96570	1.03195
72.65670	- .26352	8.05660	1.04752
71.79666	- .48414	14.43509	1.55319
69.68797	- .26970	9.17529	1.07350
66.03926	- .60094	21.42119	1.57817
65.52886	- .27223	10.74885	1.03268
64.31916	- .71115	29.37625	1.13452
61.32816	- .29436	13.20353	1.13431
60.51619	- .61352	39.15711	1.13356
56.24503	- .33936	17.02409	1.17603
56.59863	- .90361	47.57449	1.19769
89.95578	-7.15479	.61586	.98225
89.78312	-6.51836	2.73975	.99357
89.03700	-4.24232	.51227	.99727
89.52104	-3.39418	2.49733	.99127
86.43846	- .31384	2.16806	1.03192
85.15994	- .32045	3.09035	1.06356
82.24972	- .27224	4.09270	1.09321
81.31095	- .29849	5.01464	1.01160
79.80987	- .24461	5.27896	1.01937
77.97459	- .36543	8.46673	1.02242
75.62908	- .21726	5.99656	1.03229
74.77820	- .45631	13.32323	1.03333
72.56665	- .19907	6.63239	1.04314
71.62053	- .54821	19.22621	1.05370
69.54953	- .19324	7.56129	1.06726
68.65246	- .63470	25.91188	1.07500
66.53748	- .13632	8.82655	1.09015
65.27990	- .71577	33.28718	1.10060
63.49120	- .21732	10.73664	1.11748
62.05259	- .79175	41.26530	1.13191
60.33516	- .24847	13.65024	1.15014
58.75931	- .86124	49.67367	1.16946
57.22259	- .29618	17.83124	1.16936

23 35.00000

RHO = 1000.

FREQ(HZ)	XMTR R	XMTR I	RCVR R	RCVR I	CHNL R	CHNL I	XMTR*RCVR*CHNL REAL	IMAG	K
.0000	9.3205-002	.0000	-1.6270-004	.0000	.0000	.0000	.0000	.0000	1
4.8873+01	9.8662-002	-8.0769-004	-1.6271-004	-4.5397-005	.0000	.0000	.0000	.0000	2
9.7653+01	9.8753-002	-2.3435-003	-1.6273-004	-9.1997-005	.0000	.0000	.0000	.0000	3
1.4054+02	9.7612-002	-4.9019-003	-1.6277-004	-1.3801-005	.0000	.0000	.0000	.0000	4
1.5301+02	8.5241-002	-5.5555-003	-1.6312-004	-1.2103-005	.0000	.0000	.0000	.0000	5
2.4414+02	7.3694-002	-1.2065-002	-1.6278-004	-2.5016-005	.0000	.0000	.0000	.0000	6
2.5297+02	5.7470-002	-1.4003-002	-1.6216-004	-2.7012-005	.0000	.0000	.0000	.0000	7
3.4193+02	3.6884-002	-1.2664-002	-1.6308-004	-3.0219-005	.0000	.0000	.0000	.0000	8
3.9113+02	1.4704-002	-6.0349-003	-1.6311-004	-3.5983-005	.0000	.0000	.0000	.0000	9
4.3954+02	1.1444-002	6.9376-003	-1.6311-004	-4.1444-005	.0000	.0000	.0000	.0000	10
4.8228+02	-3.3470-002	4.3910-002	-1.6312-004	-4.6911-005	.0000	.0000	.0000	.0000	11
5.3111+02	-5.2691-002	5.2002-002	-1.6357-004	-5.0662-005	.0000	.0000	.0000	.0000	12
5.8524+02	-3.4189-002	8.3657-000	-1.6374-004	-5.5709-005	.0000	.0000	.0000	.0000	13
6.3477+02	-6.1611-002	1.1653-001	-1.6512-004	-6.0938-005	.0000	.0000	.0000	.0000	14
6.8394+02	-5.9914-002	1.4402-001	-1.6412-004	-6.5173-005	.0000	.0000	.0000	.0000	15
7.3242+02	-4.1103-002	1.6792-001	-1.6433-004	-6.9214-005	.0000	.0000	.0000	.0000	16
7.8111+02	-2.2103-002	1.8320-001	-1.6455-004	-7.3300-005	.0000	.0000	.0000	.0000	17
8.3008+02	3.2335-003	1.8825-001	-1.6479-004	-7.7513-005	.0000	.0000	.0000	.0000	18
8.7931+02	2.2290-002	1.8216-001	-1.6594-004	-8.3173-005	.0000	.0000	.0000	.0000	19
9.2775+02	4.5365-002	1.6563-001	-1.6531-004	-8.7940-005	.0000	.0000	.0000	.0000	20
1.0042+03	-8.2947-002	1.0223-002	-1.7359-004	-1.9330-004	.0000	.0000	.0000	.0000	40
1.0510+03	-1.0490-002	-9.4237-003	-1.6913-004	-2.6515-004	.0000	.0000	.0000	.0000	60
1.0974+03	-5.1702-002	5.8595-002	-2.1211-004	-3.9727-004	.0000	.0000	.0000	.0000	30
1.1433+03	-7.3317-002	-2.1493-002	-2.4300-004	-5.5426-004	.0000	.0000	.0000	.0000	100
1.1893+03	-2.3719-002	-2.0419-001	-2.4904-004	-6.7149-004	.0000	.0000	.0000	.0000	120
1.2353+03	1.2375-001	2.0502-002	-3.5275-004	-8.4732-004	.0000	.0000	.0000	.0000	140
1.2813+03	7.1509-002	5.1570-002	-4.5070-004	-1.0620-003	.0000	.0000	.0000	.0000	160
1.3272+03	-7.2483-003	4.3512-003	-5.2910-004	-1.3265-003	.0000	.0000	.0000	.0000	180
1.3731+03	3.6930-002	1.5911-002	-7.2927-004	-1.5650-003	.0000	.0000	.0000	.0000	200
1.4190+03	2.0380-002	2.5692-001	-9.6313-003	-2.8045-003	-3.6843-002	-0.0310-002	-2.6159-005	-9.0067-006	220
1.4649+03	-1.3591-001	9.3101-000	-1.3217-003	-2.8662-003	-5.2029-002	-1.7490-003	4.5715-004	-2.5298-005	240
1.5108+03	-1.3951-001	1.2205-001	-1.6300-003	-3.4630-003	-2.7392-002	2.5609-002	-1.4438-005	-2.6350-005	260
1.5567+03	1.4341-001	-2.5805-002	-2.7152-003	-4.5004-003	-5.6617-003	1.1185-002	9.2530-006	-2.7140-006	280
1.6026+03	-6.8070-003	-9.0709-004	-4.1603-003	-6.0513-003	-1.3941-002	1.1478-002	-8.2622-007	-3.6525-007	300
1.6485+03	1.0472-001	-2.3412-001	-6.4823-003	-8.2112-003	-6.9744-003	2.7762-002	-8.3339-007	-7.5643-007	320
1.6944+03	6.9310-002	1.5563-001	-1.0203-002	-1.1076-002	3.0180-002	1.9355-002	7.3743-005	-6.5062-005	340
1.7403+03	2.7943-001	4.0390-001	-1.9211-002	-1.5570-002	3.7043-002	-1.6087-002	-1.6035-004	-4.7260-004	360
1.7862+03	-4.0571-001	-1.1840-001	-3.6815-002	-2.0293-002	2.6043-002	-3.6389-002	8.7895-004	-1.7564-004	380
1.8321+03	-1.3939-001	4.7003-003	-7.6237-002	-1.6818-002	2.3122-004	-4.0153-002	8.7037-005	-4.0226-004	400
1.8780+03	-1.1771-001	1.4162-001	-1.6591-001	2.8141-002	1.4399-002	-1.0949-002	-2.3161-004	-7.7390-004	420
1.9239+03	2.0632-002	-2.4959-001	-2.4586-001	2.9301-001	1.8615-002	-5.7592-002	4.9093-003	-3.0610-003	440
1.9698+03	-1.3514+000	-4.5723+000	4.4101-001	7.1070-001	-2.2923-002	-5.2537-002	-2.1745-001	-7.2021-002	460
2.0157+03	-4.1110+000	-3.7550+000	7.1402-001	-5.9500-001	-3.8711-002	-4.4573-002	1.8798-001	2.3043-001	480
2.0616+03	-9.3977-001	-1.3006-001	-2.1704-001	-4.0314-001	-5.3043-002	-3.1606-003	-1.9943-003	-2.2692-002	500
2.1075+03	3.5246-001	1.2718-001	-1.8718-001	-5.5611-002	-3.1470-002	-3.1470-002	2.4030-003	8.0694-005	520
2.1534+03	1.0733-002	1.1470-002	-6.9032-002	1.5711-002	3.1450-002	2.2943-003	3.3495-005	8.0945-005	540
2.1993+03	5.0305-002	-5.2451-001	-4.2150-003	2.1071-002	-3.6514-002	2.3000-003	-3.7584-004	-8.3119-004	560
2.2452+03	8.5654-002	3.0312-001	-2.7670-002	1.6605-002	-3.1789-002	2.7631-002	3.5235-004	-2.3193-005	580
2.2911+03	3.0485-001	1.6100-001	-1.2077-002	1.2156-002	9.8885-004	0.0000-000	5.0765-005	-1.7318-004	600
2.3370+03	-3.0345-001	-3.2200-001	-7.1019-003	8.0655-000	1.2743-002	1.2743-002	6.7041-005	-1.1800-005	620
2.3829+03	-0.7587-003	1.6067-002	-4.4753-003	6.5440-003	1.1258-002	-1.0482-002	-2.0751-006	-7.6594-007	640
2.4288+03	-0.2772-002	1.6622-001	-2.9822-003	4.9237-003	-1.0510-003	-2.4068-003	-1.1360-000	1.4726-006	660
2.4747+03	3.3612-002	-8.2105-002	-1.9932-003	3.7809-003	1.2002-002	-1.2714-003	2.6148-006	4.3761-006	680
2.5206+03	-1.4627-001	-1.5749-001	-1.4037-003	2.9561-003	2.4627-002	-2.0488-002	1.6177-005	-2.0160-005	700

3.5107+004	1.1582-001	1.1582-001	-1.0146-003	2.3503-003	.0000	.0000	.0000	720
3.5084+004	5.0618-002	-3.0699-002	-7.5191-004	1.9970-003	.0000	.0000	.0000	740
3.7051+004	-1.0508-002	1.0508-002	-5.0753-004	1.9520-002	.0000	.0000	.0000	760
3.8037+004	-3.4826-002	2.1223-004	-4.3558-004	1.2855-003	.0000	.0000	.0000	780
3.9014+004	3.3752-002	1.5303-001	-3.4141-004	1.0760-003	.0000	.0000	.0000	800
3.9990+004	-0.2951-002	-1.1719-001	-2.7274-004	9.0021-004	.0000	.0000	.0000	820
4.0967+004	-9.3110-002	-1.9171-003	-2.1744-004	7.7597-004	.0000	.0000	.0000	840
4.1943+004	9.1080-002	-5.5033-003	-1.7663-004	5.6724-004	.0000	.0000	.0000	860
4.2920+004	2.4870-001	5.3609-004	-1.4137-004	5.7797-004	.0000	.0000	.0000	880
4.3896+004	2.1074-002	7.6917-002	-1.2011-004	5.0401-004	.0000	.0000	.0000	900
4.4873+004	-2.1673-002	6.4995-004	-1.0036-004	4.4223-004	.0000	.0000	.0000	920
4.5850+004	9.3115-002	5.4796-002	-8.4524-005	3.9021-004	.0000	.0000	.0000	940
4.6826+004	-8.5005-002	-4.3173-003	-7.1508-005	3.2511-004	.0000	.0000	.0000	960
4.7803+004	-1.0231-002	2.0872-002	-6.1223-005	3.0848-004	.0000	.0000	.0000	980
4.8779+004	-9.4881-003	9.9882-003	-5.2600-005	2.7615-004	.0000	.0000	.0000	1000
4.9755+004	2.7742-002	-1.2513-002	-4.1540-005	2.4825-004	.0000	.0000	.0000	1020
5.0732+004	4.2072-002	7.2397-002	-3.3481-005	2.2405-004	.0000	.0000	.0000	1040
5.1709+004	4.3808-002	-2.0576-002	-3.0225-005	2.0292-004	.0000	.0000	.0000	1060
5.2685+004	-3.1910-002	9.6241-003	-2.1622-005	1.8441-004	.0000	.0000	.0000	1080
5.3662+004	-7.0073-003	-4.5142-003	-2.3544-005	1.6312-004	.0000	.0000	.0000	1100
5.4639+004	1.3155-003	6.4289-002	-2.0991-005	1.4095-004	.0000	.0000	.0000	1120
5.5616+004	6.9051-003	-5.3560-002	-1.8622-005	1.1958-004	.0000	.0000	.0000	1140
5.6592+004	-6.4599-002	-1.0033-002	-1.6013-005	1.1942-001	.0000	.0000	.0000	1160
5.7569+004	5.1079-002	1.4354-002	-1.4930-005	1.1032-004	.0000	.0000	.0000	1180
5.8545+004	-8.0597-004	9.1637-004	-1.3431-005	1.0214-004	.0000	.0000	.0000	1200
5.9521+004	1.2628-002	-2.2552-002	-1.2116-005	9.4760-005	.0000	.0000	.0000	1220
6.0497+004	-2.5523-002	2.2149-002	-1.0931-005	8.8091-005	.0000	.0000	.0000	1240
6.1475+004	5.1127-002	4.4233-002	-9.5409-005	8.2047-005	.0000	.0000	.0000	1260
6.2451+004	-4.1823-002	4.5600-002	-9.0382-006	7.5555-005	.0000	.0000	.0000	1280
6.3426+004	-1.7183-002	2.1245-002	-8.2368-006	7.1564-005	.0000	.0000	.0000	1300
6.4401+004	8.6790-003	-5.1521-003	-7.5233-006	6.6988-005	.0000	.0000	.0000	1320
6.5377+004	1.3087-002	1.8438-003	-6.8163-006	6.2812-005	.0000	.0000	.0000	1340
6.6354+004	-1.6710-002	5.1957-002	-6.3161-006	5.8963-005	.0000	.0000	.0000	1360
6.8311+004	6.0287-003	5.1292-002	-5.8044-006	5.5417-005	.0000	.0000	.0000	1380
6.9287+004	4.2270-002	-9.4192-003	-5.3442-006	5.2232-005	.0000	.0000	.0000	1400
7.0264+004	-3.1540-002	-5.8986-004	-4.9292-006	4.9249-005	.0000	.0000	.0000	1420
7.1240+004	6.4004-004	1.0333-003	-4.5543-006	4.6484-005	.0000	.0000	.0000	1440
7.2217+004	-7.1050-003	2.0978-002	-4.2148-006	4.3946-005	.0000	.0000	.0000	1460
7.3193+004	1.2064-002	-2.9432-002	-3.9068-006	4.1586-005	.0000	.0000	.0000	1480
7.4170+004	-4.7016-002	-1.9121-002	-3.6263-006	3.9396-005	.0000	.0000	.0000	1500
7.5146+004	3.8431-002	2.5974-002	-3.3718-006	3.7360-005	.0000	.0000	.0000	1520
7.6123+004	4.0975-003	-1.5323-002	-3.1391-006	3.5466-005	.0000	.0000	.0000	1540
7.7100+004	2.3156-003	-2.5550-003	-2.9265-006	3.3701-005	.0000	.0000	.0000	1560
7.8076+004	-1.8197-002	4.1258-003	-2.7318-006	3.2054-005	.0000	.0000	.0000	1580
7.9053+004	2.6735-002	3.8476-002	-2.5533-006	3.0516-005	.0000	.0000	.0000	1600
8.0029+004	-1.5923-002	-4.1878-002	-2.3893-006	2.9077-005	.0000	.0000	.0000	1620
8.1005+004	-2.5500-002	1.6559-002	-2.2303-006	2.7729-005	.0000	.0000	.0000	1640
8.1982+004	1.0953-002	-4.4686-003	-2.0949-006	2.6469-005	.0000	.0000	.0000	1660
8.2959+004	3.3164-003	2.6532-003	-1.9715-006	2.5279-005	.0000	.0000	.0000	1680
8.3935+004	-1.3303-003	-3.2551-002	-1.8531-006	2.4105-005	.0000	.0000	.0000	1700
8.4912+004	-1.0010-002	3.5365-002	-1.7436-006	2.3112-005	.0000	.0000	.0000	1720
8.5889+004	3.2730-002	2.1188-003	-1.6423-006	2.2125-005	.0000	.0000	.0000	1740
8.6865+004	3.1995-002	-1.1647-002	-1.5453-006	2.1199-005	.0000	.0000	.0000	1760
8.7842+004	1.1478-003	7.9668-002	-1.4610-006	2.0322-005	.0000	.0000	.0000	1780
8.8818+004	-5.1954-003	1.0668-002	-1.3739-006	1.9453-005	.0000	.0000	.0000	1800
8.9795+004	1.8765-002	-1.1362-002	-1.3044-006	1.8710-005	.0000	.0000	.0000	1820
					.0000	.0000	.0000	1840

9.0771+004	-3.1664-002	-2.4527-002	-1.2341-006	1.7970-005	.0000	.0000	.0000	1960
9.1748+004	2.1993-002	3.1055-002	-1.1656-006	1.7259-005	.0000	.0000	.0000	1990
9.2125+004	1.1482-002	-1.6579-002	-1.1074-006	1.0005-005	.0000	.0000	.0000	1900
9.3101+004	-7.2497-003	3.8052-003	-1.0503-006	1.5975-005	.0000	.0000	.0000	1920
9.4678+004	-9.0778-003	-2.2057-003	-9.5550-007	1.5378-005	.0000	.0000	.0000	1940
9.5654+004	1.0333-002	3.0530-002	-9.4576-007	1.4810-005	.0000	.0000	.0000	1960
9.6631+004	9.2777-004	-3.3425-002	-8.9987-007	1.4271-005	.0000	.0000	.0000	1980
9.7607+004	-2.8026-002	8.3037-003	-9.5589-007	1.3759-005	.0000	.0000	.0000	2000
9.8584+004	2.0566-002	2.2911-003	-8.1461-007	1.3271-005	.0000	.0000	.0000	2020
9.9561+004	-1.1057-003	-1.8842-003	-7.7583-007	1.2807-005	.0000	.0000	.0000	2040

TAU (SEC)	ENVELOP DB/UV/M-KW	45000-003	18110+002	52544+002	69000-003	45898+002	12500-002	50933+002
-10000-002	-15727+002	-44000-003	-15727+002	52787+002	13000-003	45281+002	12700-002	51179+002
-99000-003	-13435+002	-43000-003	-13435+002	53013+002	15000-003	43976+002	12500-002	51505+002
-98000-003	-11782+002	-42600-003	-11782+002	53223+002	15000-003	43976+002	12500-002	51812+002
-97000-003	-19551+002	-41000-003	-19551+002	53416+002	16000-003	43297+002	12500-002	52107+002
-96000-003	-19556+002	-40000-003	-19556+002	53593+002	17000-003	42574+002	13100-002	52371+002
-95000-003	-1180+002	-39000-003	-1180+002	53764+002	18000-003	41827+002	13200-002	52624+002
-94000-003	-1180+002	-38000-003	-1180+002	53918+002	19000-003	41021+002	13300-002	52861+002
-93000-003	-12751+002	-37000-003	-12751+002	54053+002	20000-003	39467+002	13400-002	53081+002
-92000-003	-14529+002	-36000-003	-14529+002	54193+002	21000-003	38605+002	13500-002	53240+002
-91000-003	-17781+002	-35000-003	-17781+002	54303+002	22000-003	37830+002	13600-002	53404+002
-90000-003	-16681+002	-34000-003	-16681+002	54414+002	23000-003	37000+002	13700-002	53572+002
-89000-003	-17962+002	-33000-003	-17962+002	54512+002	24000-003	36288+002	13800-002	53749+002
-88000-003	-18713+002	-32000-003	-18713+002	54601+002	25000-003	35424+002	13900-002	53913+002
-87000-003	-19737+002	-31000-003	-19737+002	54682+002	26000-003	34531+002	14000-002	54079+002
-86000-003	-21148+002	-30000-003	-21148+002	54750+002	27000-003	33600+002	14100-002	54225+002
-85000-003	-22752+002	-29000-003	-22752+002	54811+002	28000-003	32660+002	14200-002	54341+002
-84000-003	-23538+002	-28000-003	-23538+002	54863+002	29000-003	31690+002	14300-002	54434+002
-83000-003	-22329+002	-27000-003	-22329+002	54908+002	30000-003	30700+002	14400-002	54545+002
-82000-003	-20100+002	-26000-003	-20100+002	54948+002	31000-003	29700+002	14500-002	54637+002
-81000-003	-18131+002	-25000-003	-18131+002	54983+002	32000-003	28700+002	14600-002	54711+002
-80000-003	-16741+002	-24000-003	-16741+002	55000+002	33000-003	27680+002	14700-002	54782+002
-79000-003	-15854+002	-23000-003	-15854+002	55000+002	34000-003	26600+002	14800-002	54837+002
-78000-003	-15296+002	-22000-003	-15296+002	55000+002	35000-003	25500+002	14900-002	54890+002
-77000-003	-14907+002	-21000-003	-14907+002	55000+002	36000-003	24300+002	15000-002	54930+002
-76000-003	-14379+002	-20000-003	-14379+002	55000+002	37000-003	23100+002	15100-002	54960+002
-75000-003	-14306+002	-19000-003	-14306+002	55000+002	38000-003	21900+002	15200-002	54987+002
-74000-003	-14667+002	-18000-003	-14667+002	55000+002	39000-003	20700+002	15300-002	55000+002
-73000-003	-14897+002	-17000-003	-14897+002	55000+002	40000-003	19500+002	15400-002	55000+002
-72000-003	-15529+002	-16000-003	-15529+002	55000+002	41000-003	18300+002	15500-002	55000+002
-71000-003	-16210+002	-15000-003	-16210+002	55000+002	42000-003	17100+002	15600-002	55000+002
-70000-003	-16849+002	-14000-003	-16849+002	55000+002	43000-003	15900+002	15700-002	55000+002
-69000-003	-17564+002	-13000-003	-17564+002	55000+002	44000-003	14700+002	15800-002	55000+002
-68000-003	-18583+002	-12000-003	-18583+002	55000+002	45000-003	13500+002	15900-002	55000+002
-67000-003	-20036+002	-11000-003	-20036+002	55000+002	46000-003	12300+002	16000-002	55000+002
-66000-003	-21643+002	-10000-003	-21643+002	55000+002	47000-003	11100+002	16100-002	55000+002
-65000-003	-22129+002	-90000-004	-22129+002	55000+002	48000-003	9900+002	16200-002	55000+002
-64000-003	-20466+002	-80000-004	-20466+002	55000+002	49000-003	8700+002	16300-002	55000+002
-63000-003	-18056+002	-70000-004	-18056+002	55000+002	50000-003	7500+002	16400-002	55000+002
-62000-003	-16073+002	-60000-004	-16073+002	55000+002	51000-003	6300+002	16500-002	55000+002
-61000-003	-14727+002	-50000-004	-14727+002	55000+002	52000-003	5100+002	16600-002	55000+002
-60000-003	-13903+002	-40000-004	-13903+002	55000+002	53000-003	3900+002	16700-002	55000+002
-59000-003	-13406+002	-30000-004	-13406+002	55000+002	54000-003	2700+002	16800-002	55000+002
-58000-003	-13068+002	-20000-004	-13068+002	55000+002	55000-003	1500+002	16900-002	55000+002
-57000-003	-12807+002	-10000-004	-12807+002	55000+002	56000-003	300+002	17000-002	55000+002
-56000-003	-12642+002	10000-004	-12642+002	55000+002	57000-003	10000+002	17100-002	55000+002
-55000-003	-12656+002	20000-004	-12656+002	55000+002	58000-003	20000+002	17200-002	55000+002
-54000-003	-12962+002	30000-004	-12962+002	55000+002	59000-003	30000+002	17300-002	55000+002
-53000-003	-13617+002	40000-004	-13617+002	55000+002	60000-003	40000+002	17400-002	55000+002
-52000-003	-14524+002	50000-004	-14524+002	55000+002	61000-003	50000+002	17500-002	55000+002
-51000-003	-15401+002	60000-004	-15401+002	55000+002	62000-003	60000+002	17600-002	55000+002
-50000-003	-16026+002	70000-004	-16026+002	55000+002	63000-003	70000+002	17700-002	55000+002
-49000-003	-16580+002	80000-004	-16580+002	55000+002	64000-003	80000+002	17800-002	55000+002
-48000-003	-17421+002	90000-004	-17421+002	55000+002	65000-003	90000+002	17900-002	55000+002
-47000-003	-18573+002	100000-003	-18573+002	55000+002	66000-003	100000+002	18000-002	55000+002
-46000-003	-19232+002	110000-003	-19232+002	55000+002	67000-003	110000+002	18100-002	55000+002
				55000+002	68000-003	120000+002	18200-002	55000+002

TAU(SEC) ENVELOP  
DB/UV/M-KW

.1800-002	.42105+002	.19059+002	.29700-002	-.17907+002
.18400-002	.43627+002	.19597+002	.29800-002	-.16873+002
.18500-002	.45128+002	.18124+002	.29900-002	-.15975+002
.18500-002	.47507+002	.17643+002	.30000-002	-.15265+002
.18700-002	.41253+002	.17400-002		
.18800-002	.43341+002	.16043+002		
.18900-002	.45306+002	.16131+002		
.19000-002	.47301+002	.15551+002		
.19100-002	.49651+002	.15125+002		
.19200-002	.43355+002	.14616+002		
.19300-002	.43263+002	.14106+002		
.19400-002	.40535+002	.13572+002		
.19500-002	.41543+002	.13031+002		
.19600-002	.41903+002	.12486+002		
.19700-002	.40312+002	.11935+002		
.19800-002	.37513+002	.11771+002		
.19900-002	.33031+002	.10822+002		
.20000-002	.31001+002	.10278+002		
.20100-002	.31001+002	.97342+001		
.20200-002	.30112+002	.91015+001		
.20300-002	.30337+002	.82281+001		
.20400-002	.31335+002	.80675+001		
.20500-002	.29701+002	.75063+001		
.20600-002	.27913+002	.69437+001		
.20700-002	.29172+002	.63465+001		
.20800-002	.31471+002	.59333+001		
.20900-002	.30322+002	.52511+001		
.21000-002	.29271+002	.48331+001		
.21100-002	.21111+002	.40675+001		
.21200-002	.20195+002	.33275+001		
.21300-002	.26171+002	.29250+001		
.21400-002	.22511+002	.19177+001		
.21500-002	.20011+002	.11958+001		
.21600-002	.27571+002	.40547+000		
.21700-002	.21311+002	.29577+000		
.21800-002	.23901+002	.11211+001		
.21900-002	.26701+002	.20409+001		
.22000-002	.26101+002	.30438+001		
.22100-002	.25101+002	.41495+001		
.22200-002	.25101+002	.55232+001		
.22300-002	.25101+002	.65533+001		
.22400-002	.25101+002	.70340+001		
.22500-002	.25101+002	.91022+001		
.22600-002	.25101+002	.10613+002		
.22700-002	.25101+002	.12124+002		
.22800-002	.25101+002	.13521+002		
.22900-002	.25101+002	.15111+002		
.23000-002	.22811+002	.17407+002		
.23100-002	.24411+002	.16261+002		
.23200-002	.22051+002	.19703+002		
.23300-002	.25211+002	.20114+002		
.23400-002	.25211+002	.20231+002		
.23500-002	.21242+002	.20434+002		
.23600-002	.20022+002	.20504+002		
.23700-002	.20022+002	.20504+002		
.23800-002	.17940+002	.20504+002		
.23900-002	.13511+002	.19927+002		
.24000-002		.18927+002		



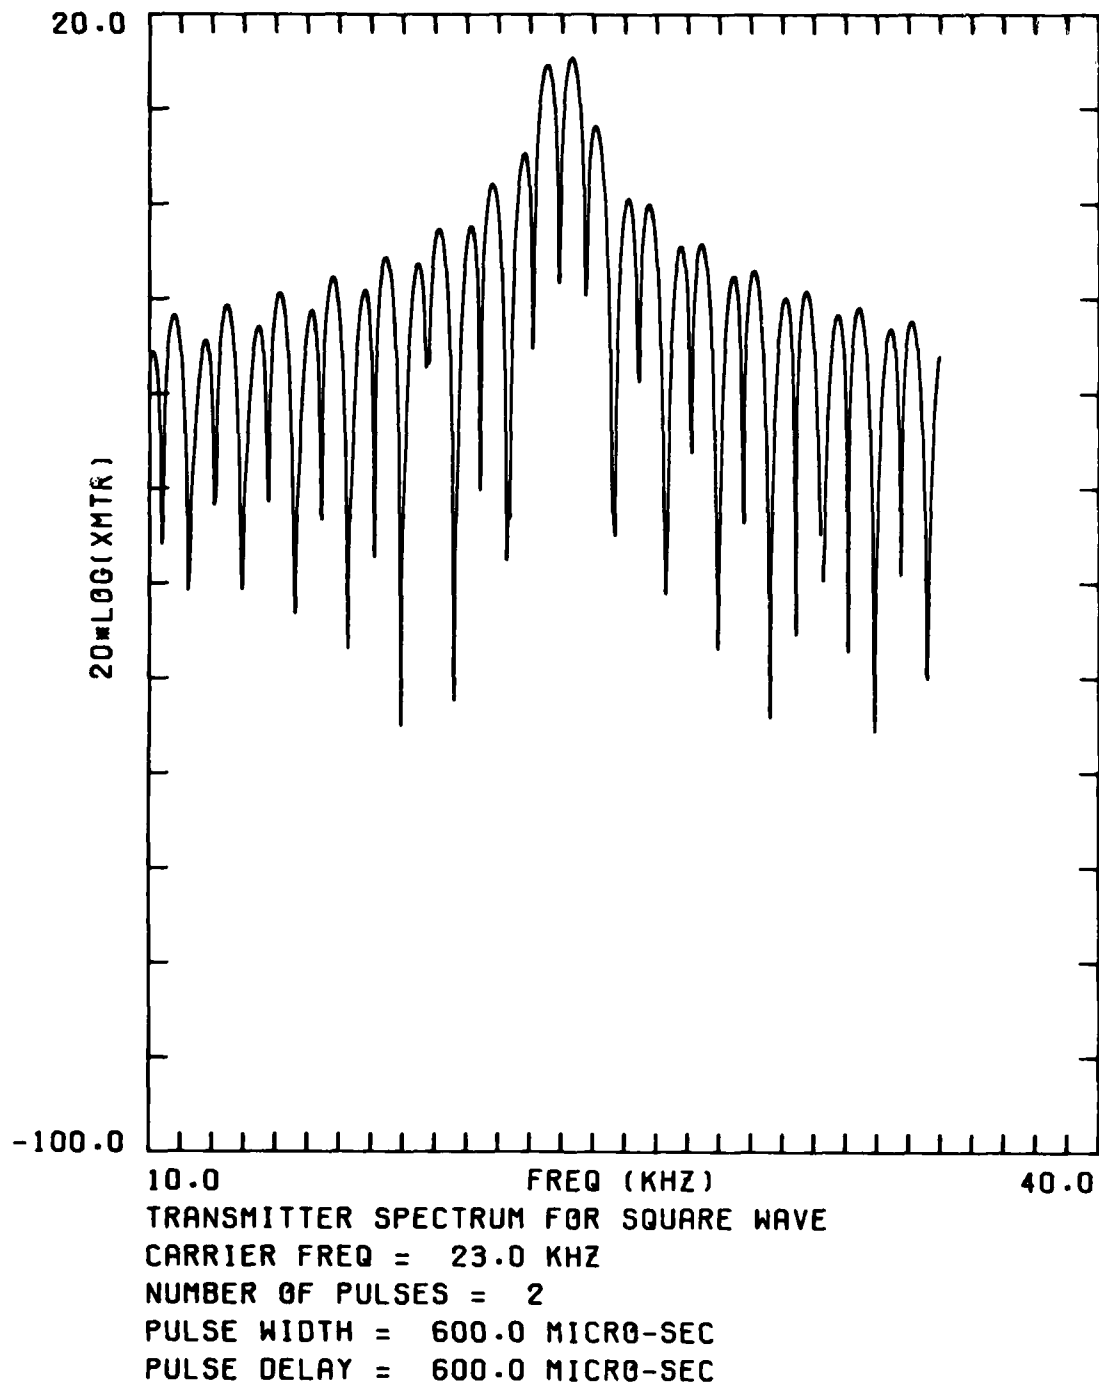


Figure 1. Transmitter spectrum versus frequency.


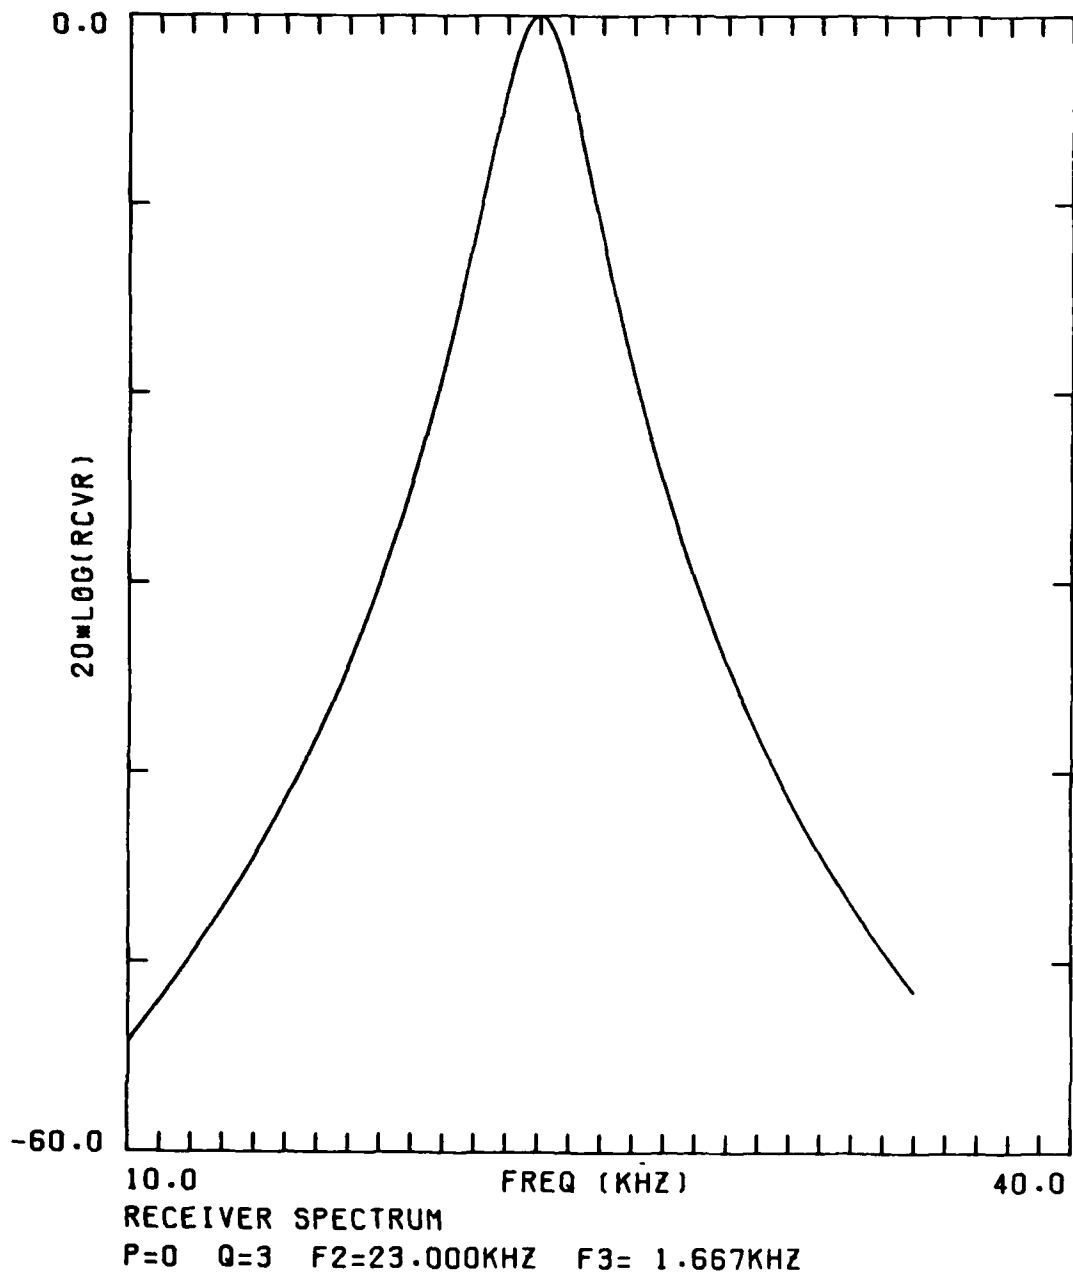


Figure 2. Receiver spectrum versus frequency.

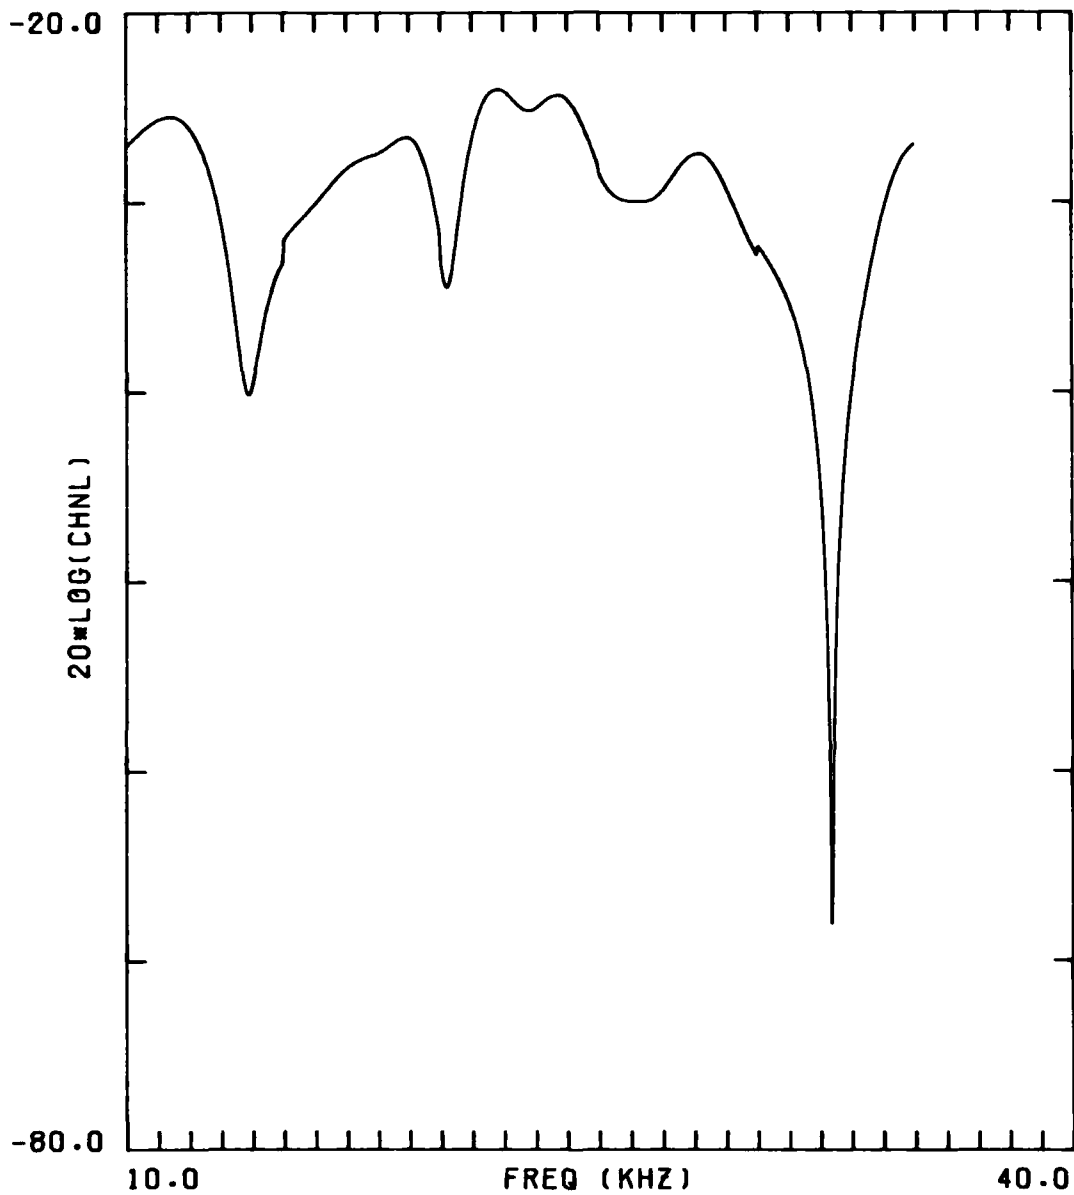

CHANNEL SPECTRUM  
 BETA=0.5, HPRIME=87.0  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =1000.00 KM

Figure 3. Channel spectrum versus frequency.



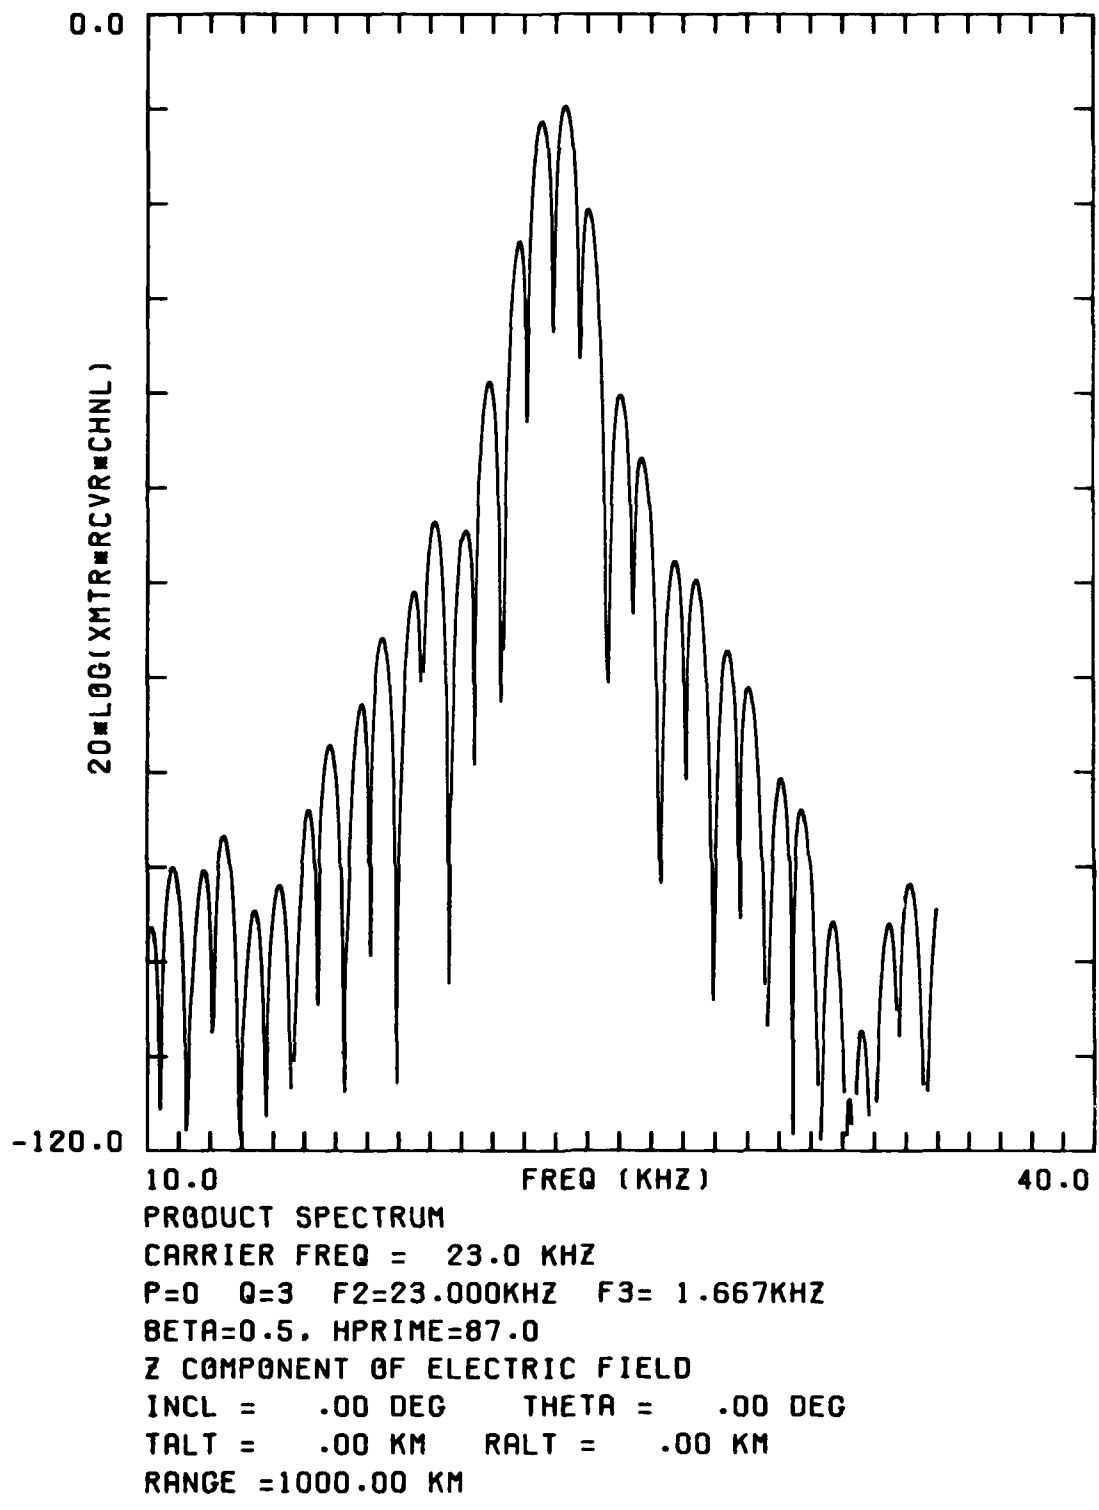


Figure 4. Product spectrum versus frequency.

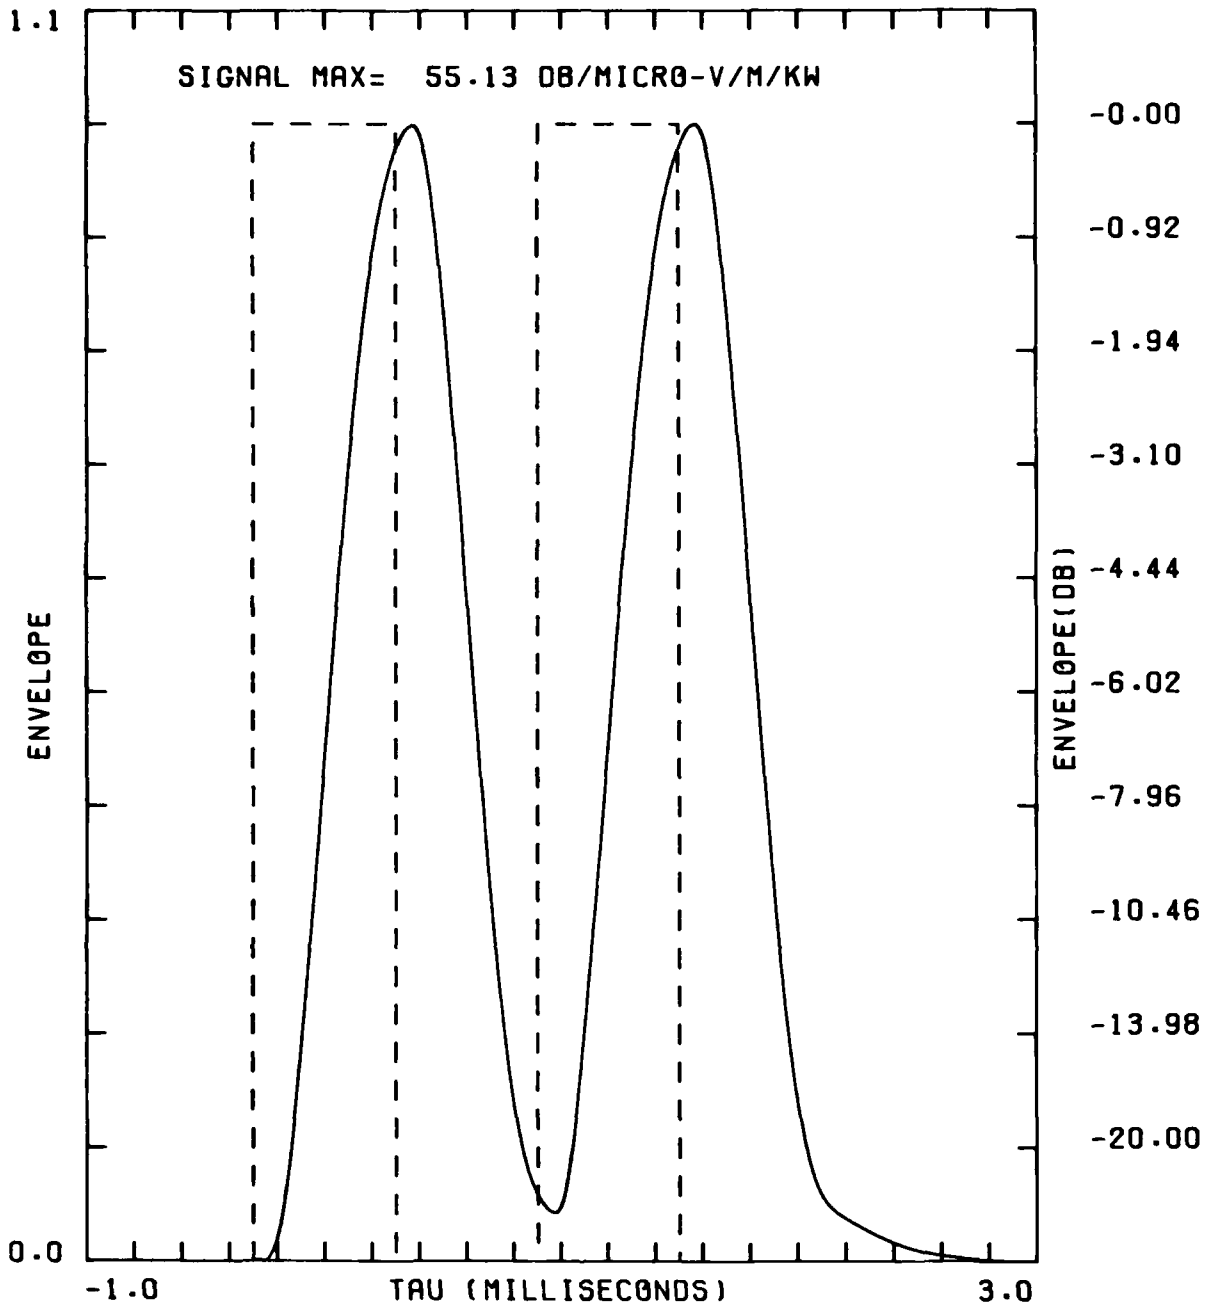


SQUARE WAVE  
 CARRIER FREQ = 23.0 KHZ  
 P=0 Q=3 F2=23.000KHZ F3= 1.667KHZ  
 BETA=0.5, HPRIME=87.0  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =1000.00 KM  
 NUMBER OF PULSES = 2  
 PULSE WIDTH = 600.0 MICRO-SEC  
 PULSE DELAY = 600.0 MICRO-SEC

Figure 5. Input and output waveforms normalized to unity.

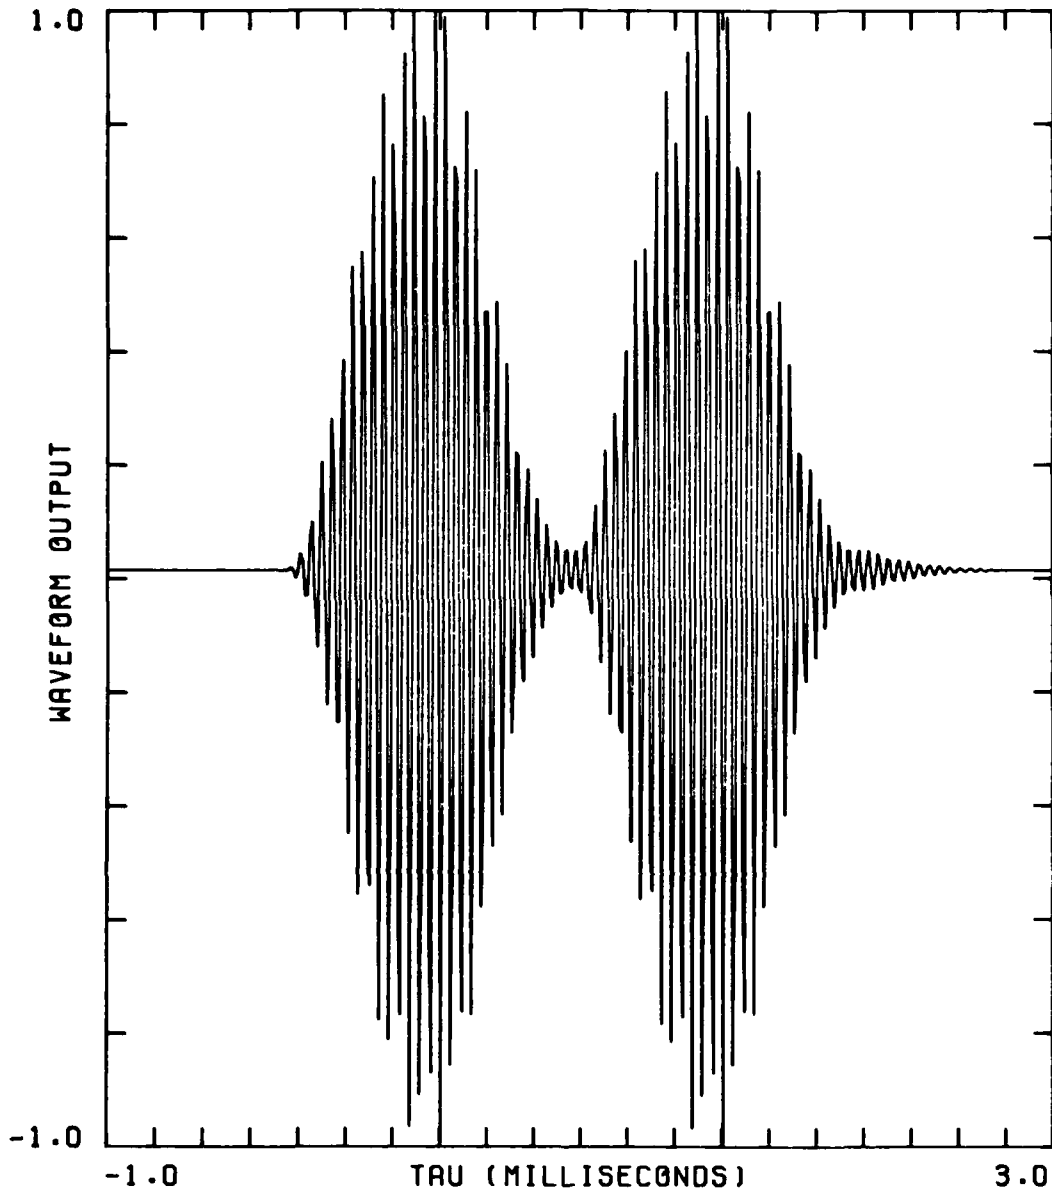


SQUARE WAVE  
 CARRIER FREQ = 23.0 KHZ  
 P=0 Q=3 F2=23.000KHZ F3= 1.667KHZ  
 BETA=0.5, HPRIME=87.0  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =1000.00 KM  
 NUMBER OF PULSES = 2  
 PULSE WIDTH = 600.0 MICRO-SEC  
 PULSE DELAY = 600.0 MICRO-SEC

Figure 6. Waveform output, including carrier frequency.

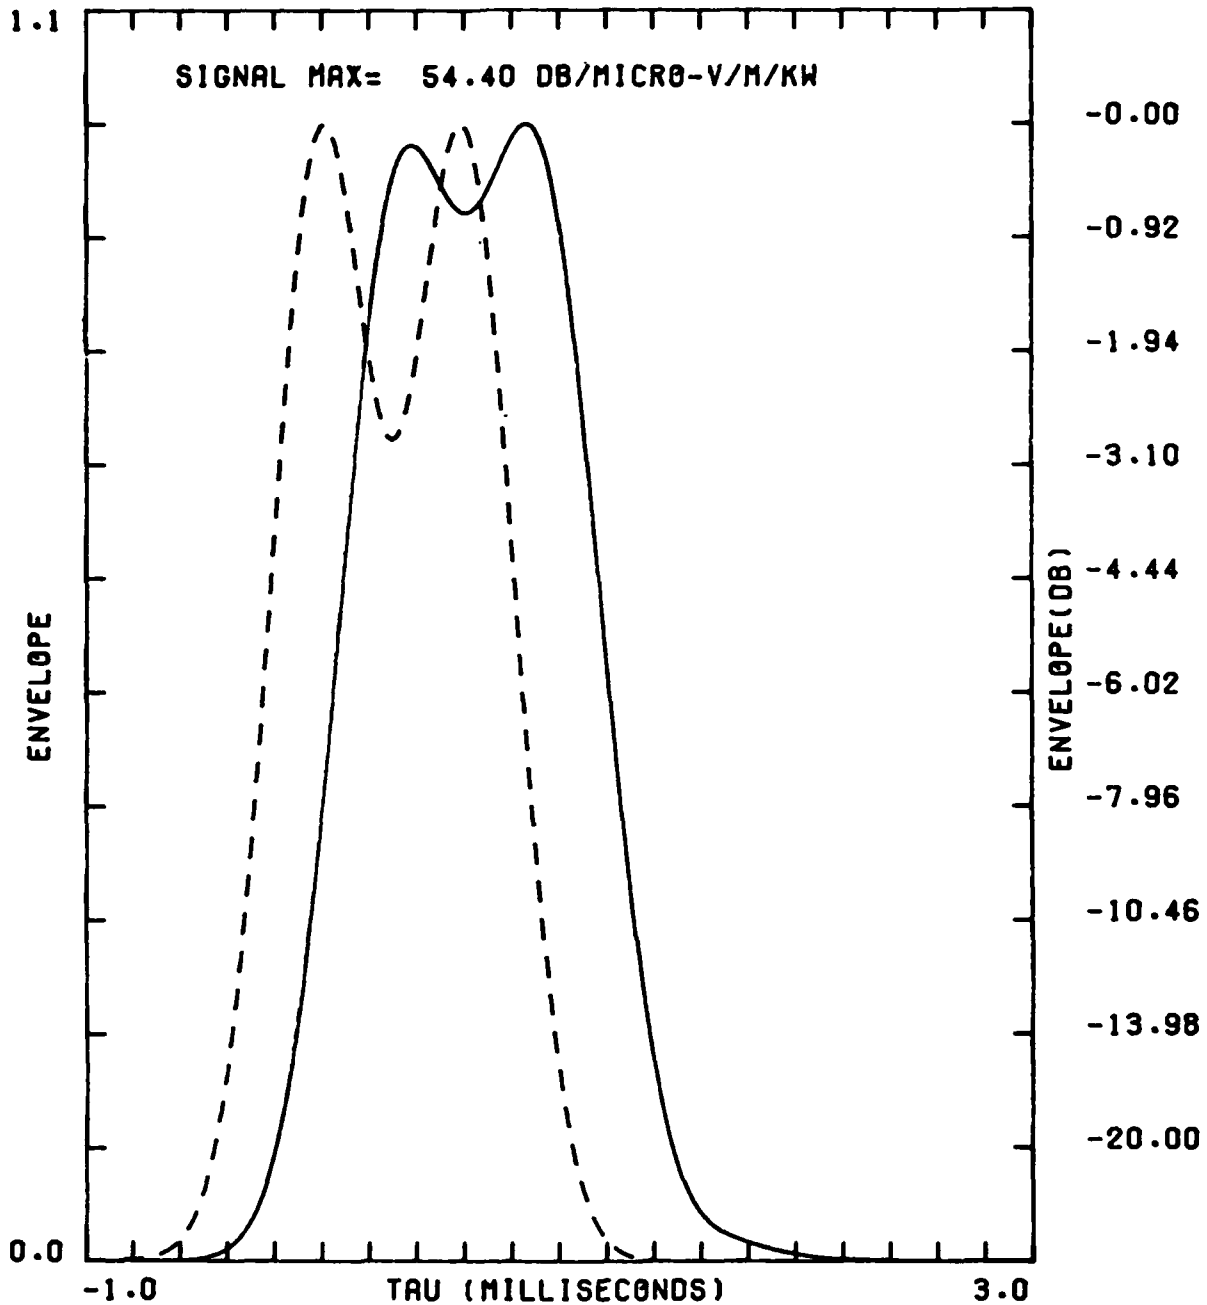

GAUSSIAN  
 CARRIER FREQ = 23.0 KHZ  
 P=0 Q=3 F2=23.000KHZ F3= 1.667KHZ  
 BETA=0.5, HPRIME=87.0  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =1000.00 KM  
 NUMBER OF PULSES = 2  
 1/E HALF WIDTH = 300.0 MICRO-SEC  
 PULSE DELAY = 600.0 MICRO-SEC


Figure 7. Envelope output for IFLGTR=2.

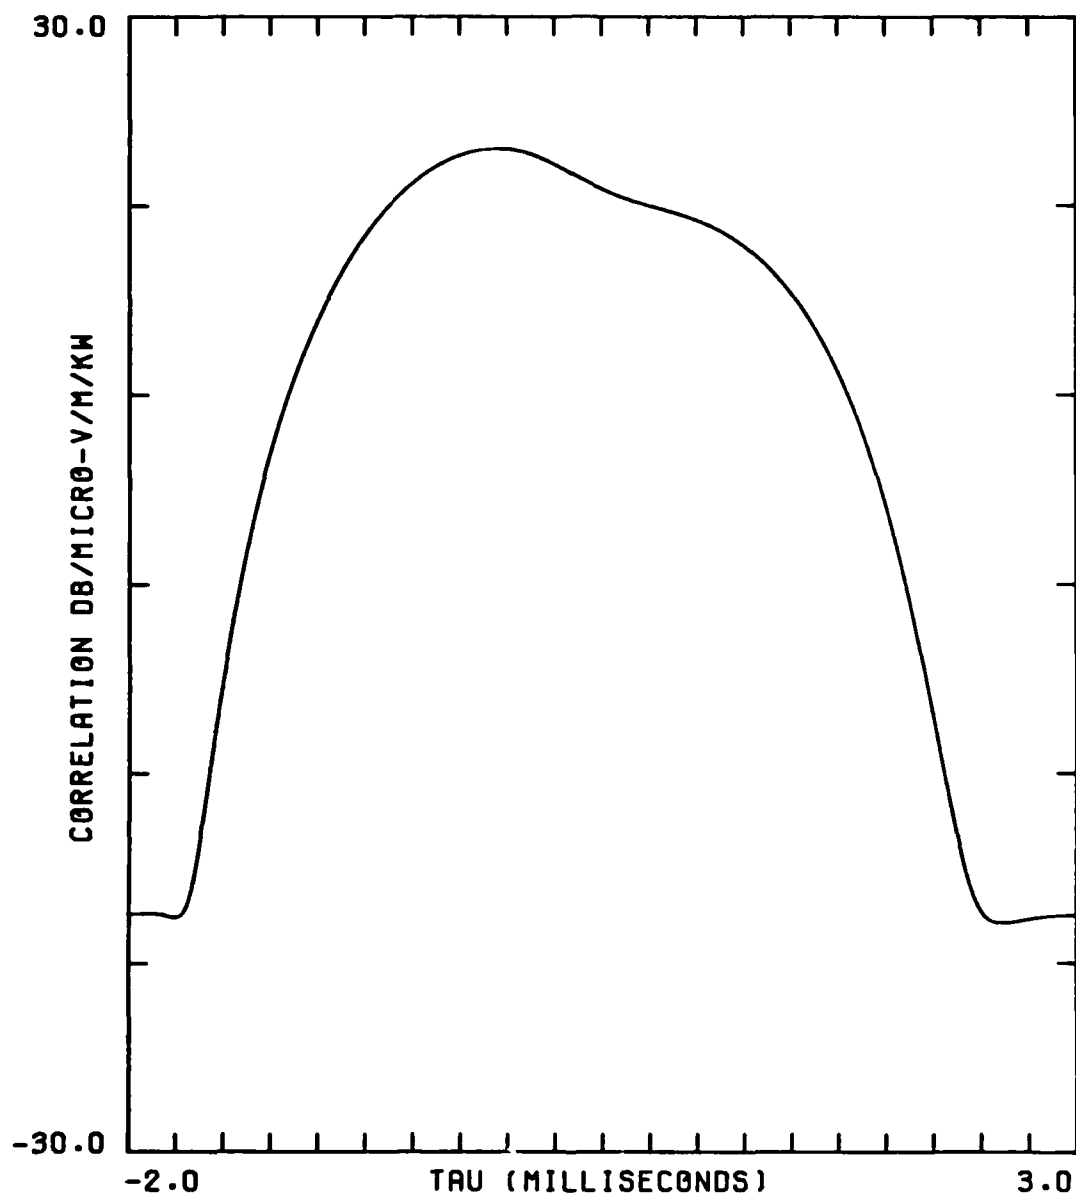

-2.0 TAU (MILLISECONDS) 3.0  
 CORRELATOR OUTPUT FOR MSK FORMAT  
 DAYTIME PROFILE HAWAII TO SAN DIEGO PATH  
 CARRIER FREQ = 23.0 KHZ  
 CHIP FREQ = 1.00 KHZ  
 P=0 Q=3 F2=23.000KHZ F3= 1.667KHZ  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =2282.00 K...


Figure 8. Envelope output for IFLGTR=3.



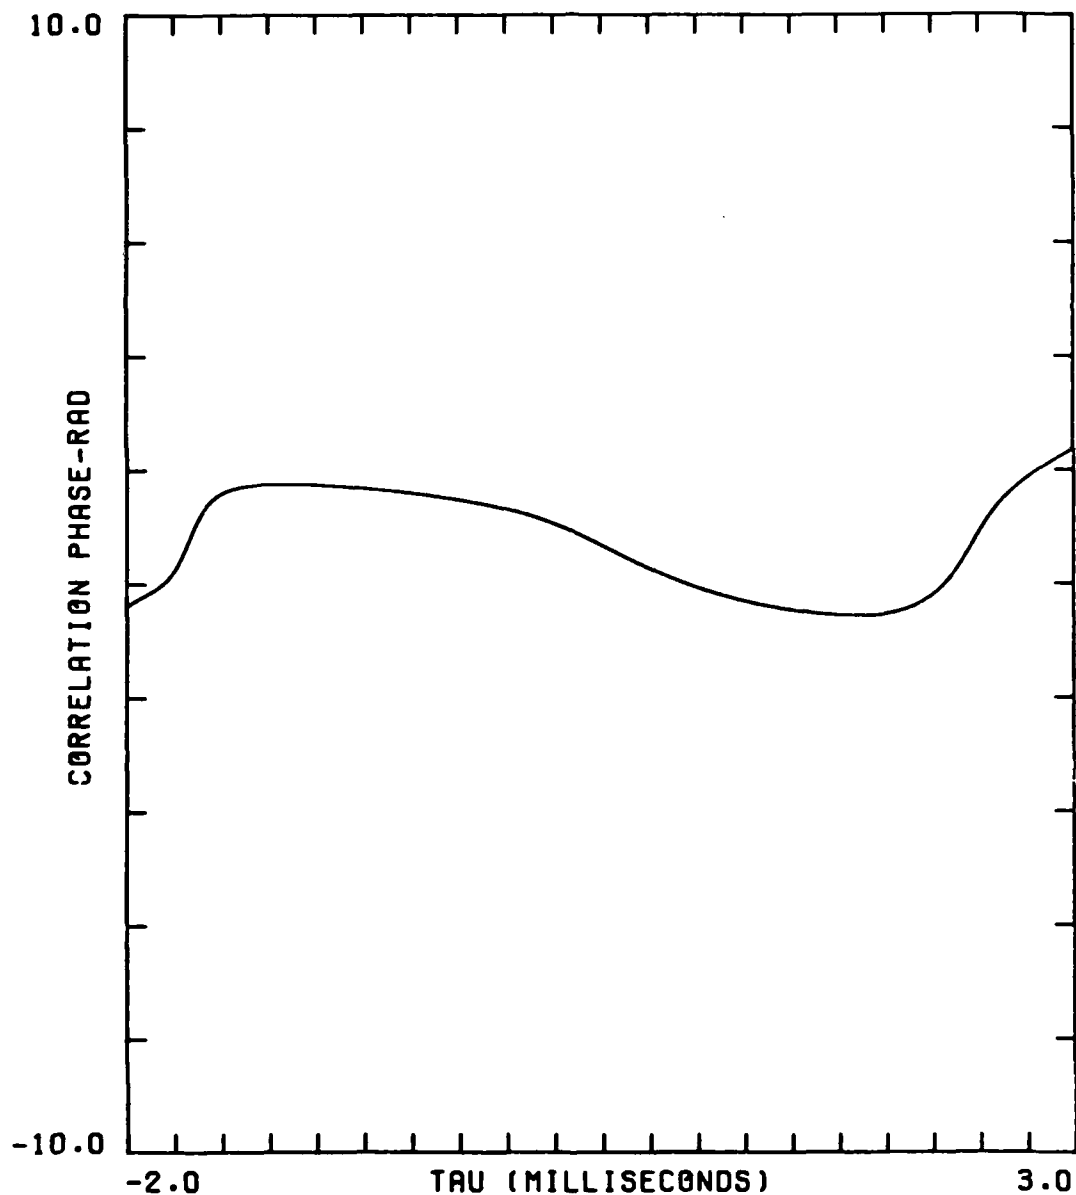


CORRELATOR PHASE  
 DAYTIME PROFILE HAWAII TO SAN DIEGO PATH  
 CARRIER FREQ = 23.0 KHZ  
 CHIP FREQ = 1.00 KHZ  
 P=0 Q=3 F2=23.000KHZ F3= 1.667KHZ  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =2282.00 KM

Figure 9. Correlator phase output for IFLGTR=3.

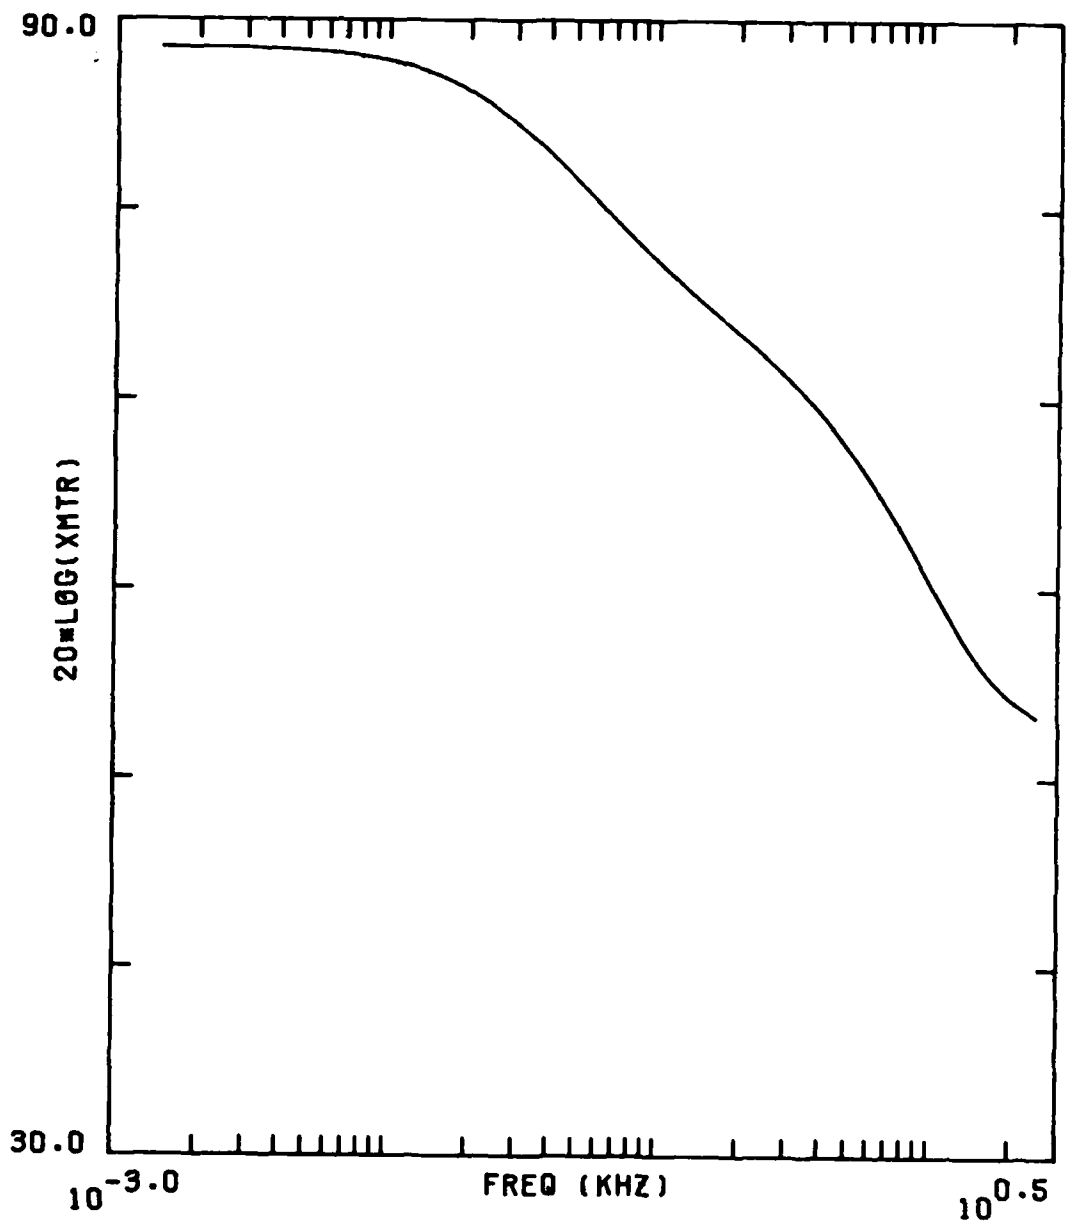

TRANSMITTER SPECTRUM FOR SLOW WAVE TAIL CALCULATION  
WILLIAMS SOURCE


Figure 10. Transmitter spectrum for slow-wave-tail calculation Williams' source.

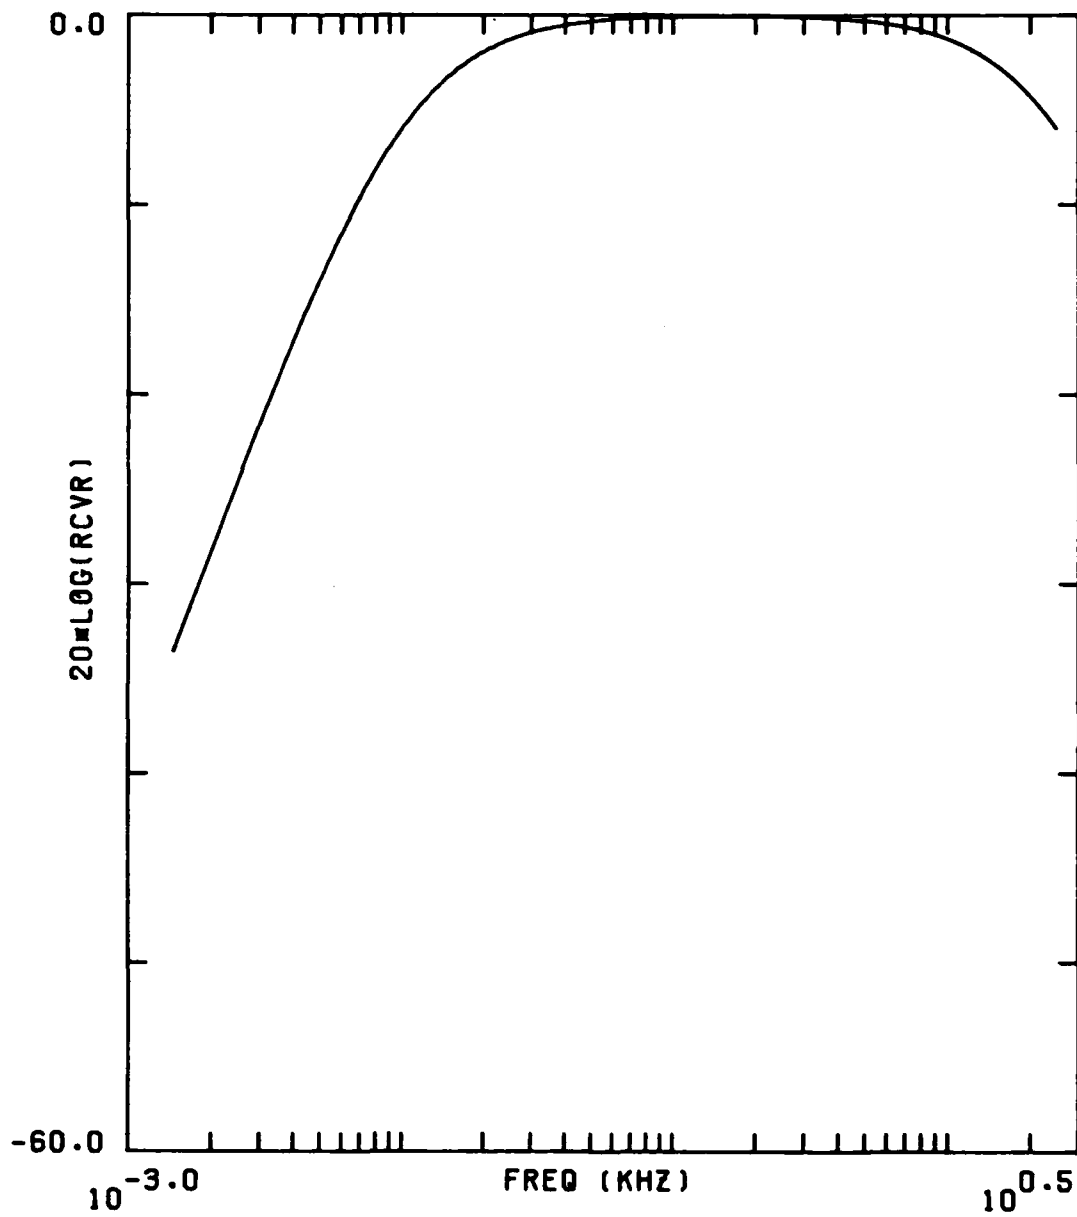

RECEIVER SPECTRUM


P=2 Q=2 F1= .010KHZ F2= .000KHZ F3= 2.500KHZ

Figure 11. Receiver spectrum used for slow-tail measurements.

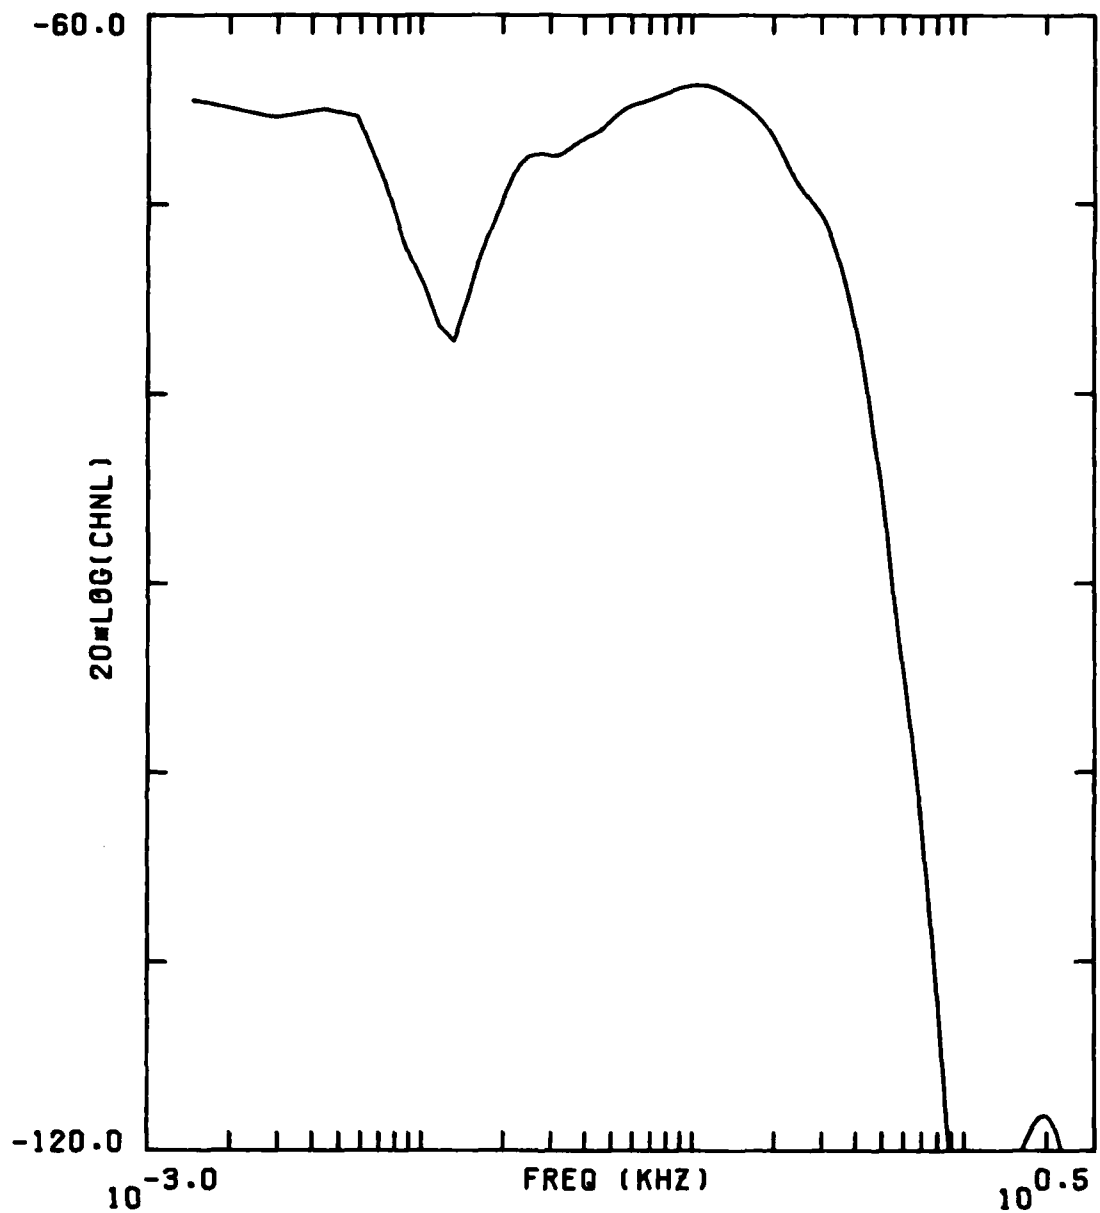

CHANNEL SPECTRUM  
 SATELLITE NIGHT A=254,C=47,RH0=3700KM  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =3700.00 KM

Figure 12. Channel spectrum.

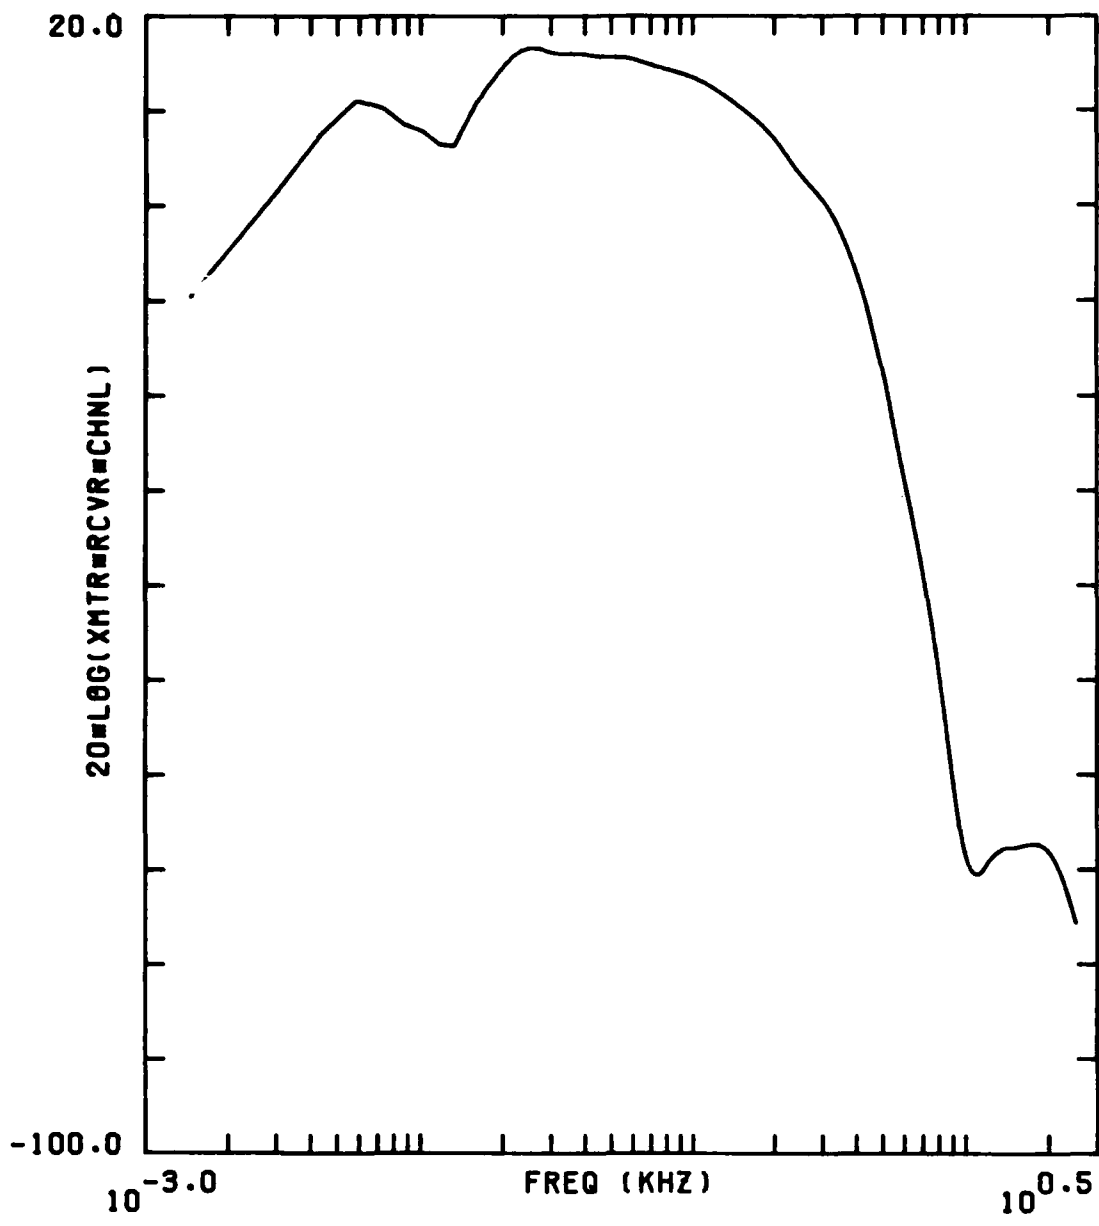

PRODUCT SPECTRUM  
 WILLIAMS SOURCE  
 P=2 Q=2 F1= .010KHZ F2= .000KHZ F3= 2.500KHZ  
 SATELLITE NIGHT A=254.C=47.RH0=3700KM  
 Z COMPONENT OF ELECTRIC FIELD  
 INCL = .00 DEG THETA = .00 DEG  
 TALT = .00 KM RALT = .00 KM  
 RANGE =3700.00 KM

Figure 13. Product spectrum.

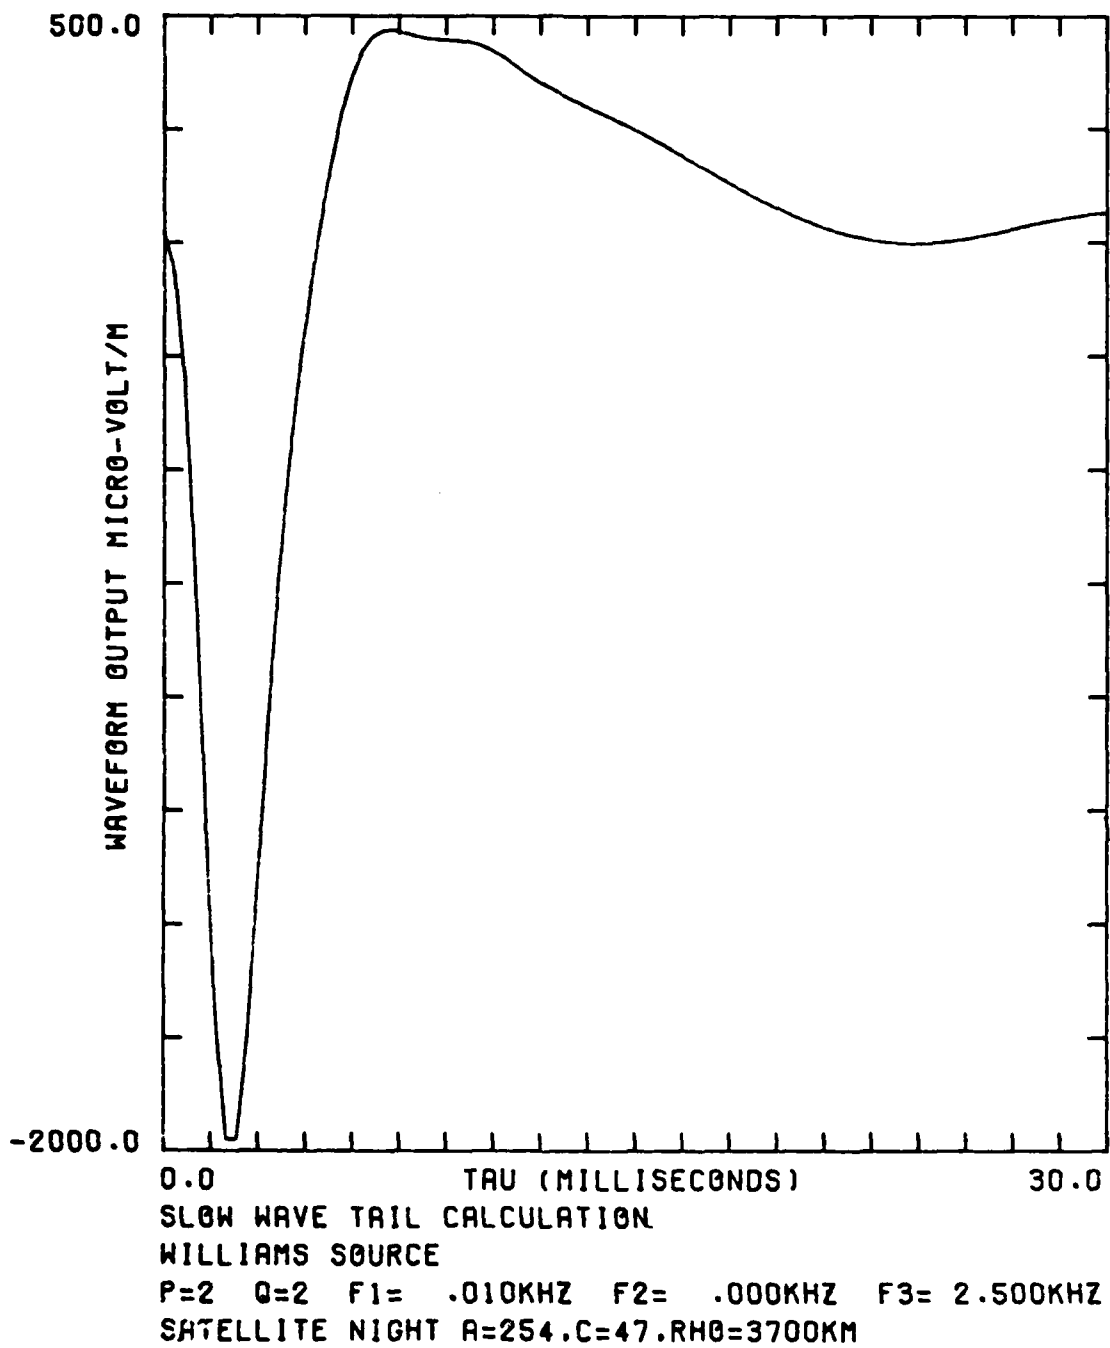


Figure 14. Slow-wave-tail output for the Williams' source.

## REFERENCES

1. NOSC TR 444, A Computer Program for ELF/VLF Pulse propagation in a Laterally Homogeneous Earth-Ionosphere Waveguide, by R.A. Pappert and L.R. Shockey (prepared for Defense Nuclear Agency), August, 1979.
2. NELC Interim Report 77T, "MODESRCH," An Improved Computer Program for Obtaining ELF/VLF Mode Constants in an Earth-Ionosphere Waveguide, interim report 77T, by D.G. Morfitt and C.H. Shellman (prepared for Defense Nuclear Agency), October, 1976.
3. Seyler, Jr., C.E., S.C. Block, and R.W. Flynn, Pulse Propagation in a Magnetoplasma, 1. Longitudinal Propagation, J. Geophys Rev 77(22), p 4237-4241, 1972.
4. Scheif, F., Schaum's Outline Series of Theory and Problems of Numerical Analysis, McGraw-Hill, 1968.
5. NELC TR 1834, Effects of the VLF Propagation Channel on Spread-Spectrum Communication Systems, by I.J. Rothmuller, August, 1972.
6. NRL report 8521, Multipath VLF Propagation Effects on Correlation Receivers, by F.J. Kelley, J.P. Hauser, H.M. Beck, and F.J. Rhoads, September, 1981.
7. Galejs, J., Terrestrial Propagation of Long Electromagnetic Waves, Pergamon Press, 1972.
8. NELC Interim Report 713, WKB Mode Summing Program for VLF/ELF Antennas of Arbitrary Length, Shape, and Elevation, by R.A. Pappert and L.R. Shockey, interim report 713, June, 1971.
9. Computation Laboratory, Cambridge MA, Tables of the Modified Hankel Functions of Order One-Third and Their Derivatives, Harvard University Press, 1945.

10. Cooley, J.W., and J.W. Tukey, An Algorithm for the Machine Calculation of Complex Fourier Series, Math Comput 19, p 297-301, 1965.



APPENDIX-PROGRAM LISTING

```

1          C      PARAMETER NMAX=2049
2          C
3          C      INCLUDE SPECAMIS,COMMONSECS,LIST
4          COMMON/THREE/TP(NRMODE),RA(10(4,NRMODE)),FRQ,KF,NMF
5          COMMON/FOUR/NFFT,FRFREQ,ENTPRT,TAUMAX,FRQO,PULSEM,
6          RHOIN,DELPHO,REBNAX,TALT,RALT,INCL,THETA,ICOMP,
7          $      IPLOTR,INTPLG,NRINT,TACO,NUMTAU,CHIPFR,NUMPLS,PULSED,
8          $      IPLOT,IPLOT1
9          C      COMMON/FIVE/SIGMA,EPDR,NPRTS,NRPT1,NEWD
10         COMMON/SIX/PLOTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMFTS
11         COMMON/SEVEN/XMIN,XMAX,XLVL,SCALEX,XLNG,YLNG
12         COMMON/NINE/X(NMAX),Y(NMAX)
13         COMMON/TEN/XL,YL
14         COMMON/COM11/PLOTX3(300),PLOTY3(300)
15         COMMON/COM12/FREQ1,FRQ2,FRQ3,P,Q
16         C
17         C      PARAMETER NRSAVE=NRMODE*10+3
18         DIMENSION SAVEMC(NRSAVE)
19         EQUIVALENCE (TP,SAVEMC)
20         C
21         C      COMPLEX TMP1,IMP2,IMP3,XTRA,TP,STP,RATIO,
22         $      EXC(3,NRMODE),HGT(3,NRMODE),HGR(3,NRMODE),FOPTAU,SUM,SUMP,
23         $      IN/(0.0,1.0)/
24         REAL INCL,INCLS
25         C
26         C      DIMENSION XS(NMAX),YS(NMAX)
27         C
28         C      DATA TWOP1/6.2831 85307 17959 64763 25287/
29         DATA DTR/0.0174 53292 51994 32957 69237/
30         DATA ALPHA/3.14E-4/
31         DATA XLNG/5./,YLNG/6./
32         C
33         C      CALL INPJ
34         C
35         C
36         C      C..PROCESS MODE DATA
37         IF(ICOMP.EQ.ICOMPS.AND.TALT.EQ.TALTS.AND.
38         $      RALT.EQ.RALTS.AND.INCL.EQ.INCLS.AND.
39         $      THETA.EQ.THETAS.AND.NEWD.EQ.0) GO TO 70
40         INCL=INCL
41         THETA=THETA
42         SIN=SIN(INCL*DTR)
43         SIN2=SIN(THETA*DTR)
44         COS1=COS(IPCL*DTR)
45         COS2=COS(THETA*DTR)
46         NM=0
47         DO 31 K=1,NRFREQ
48         DO 31 M=1,HRMODE
49         MODE(M,K)=0
50         C
51         PRINT 1040
52         DO 49 K=1,NF
53         READ(2) SAVEMC
54

```

```

55 C
56 IF(NEWD .EQ. 0 .AND. TALT .EQ. TALTS) GO TO 33
57 CALL HIGAIN(1,FRQ,SIGMA,EPSR,ALPHA,NMF,TP,TALT,HGT)
58 C
59 33 IF(NEWD .EQ. 0 .AND. RALT .EQ. RALTS) GO TO 34
60 CALL HIGAIN(1,FRQ,SIGMA,EPSR,ALPHA,NMF,TP,RALT,MGR)
61 C
62 34 IF(ICOMP .EQ. ICOMP5) GO TO 40
63 DO 38 M=1,NMF
64 STP=CNFLX(STPR(M,K),STPI(M,K))
65 IF(ICOMP=2) 35,36,37
66 EXC(1,M)=(STP*STP)*RATIO(1,M)
67 EXC(2,M)=-STP*RATIO(3,M)*RATIO(4,M)
68 EXC(3,M)=-STP*RATIO(1,M)
69 GO TO 38
70 EXC(1,M)=-STP*RATIO(3,M)
71 EXC(2,M)=RATIO(2,M)
72 EXC(3,M)=RATIO(3,M)
73 GO TO 38
74 EXC(1,M)=STP*RATIO(1,M)
75 EXC(2,M)=-RATIO(3,M)*RATIO(4,M)
76 EXC(3,M)=-RATIO(1,M)
77 CCNTINUE
78 C
79 40 NM=MAX0(NM,NMF)
80 C..WN=2*PI*FREQ/C
81 WN=20.95845*FRQ
82 ACONST=9.686*WN
83 C..REFERENCE EXCITATION TO REFLT=70
84 DO 42 M=1,NMF
85 ATEN=ACONST*STP(M,K)
86 VOVERC=1.0/STPR(M,K)
87 TMP1 = EXC(1,M)*HGT(1,M)*HGR(ICOMP,M)
88 TMP2 = EXC(2,M)*HGT(2,M)*HGR(ICOMP,M)
89 TMP3 = EXC(3,M)*HGT(3,M)*HGR(ICOMP,M)
90 XTRA=TMP1*(COS1+(IMP2*SIN2+IMP3*COS2))*SINI
91 C
92 C..SET UP ARRAYS FOR INTERPOLATION
93 MODE(M,1)=M
94 XTRAR(M,K)=REAL(XTRA)
95 XTRAI(M,K)=AIMAG(XTRA)
96 C
97 IF(M.GT.1) THEN TP(M),ATTEN,VOVERC
98 PRINT 1043,
99 ELSE
100 PRINT 1041,NMF,FRQ,TP(M),ATTEN,VOVERC
101 ENDF
102 CCNTINUE
103 C
104 C..END PROCESSING OF DATA FOR THIS FREQUENCY
105 CONTINUE
106 ICOMP5=ICOMP
107 TALTS=TALT
108 RALTS=RALT
109 NNEW=0
110 RNEW=2
111 C

```

```

112 C..SET UP INTERPOLATION
113 DO 56 M=1,NM
114 KMODE = 0
115 KMODE1 = 1
116 DO 53 KF =1,NF
117 IF(MODE(M,KF) .NE. 0) KMODE=KMODE+1
118 CONTINUE
119 53 DO 54 KF=1,NF
120 IF(MODE(M,KF) .NE. 0) MODE(M,KF)=KMODE
121 CONTINUE
122 DO 55 KF=1,NF
123 IF(MODE(M,KF) .EQ. 0) KMODE1=KMODE1+1
124 KK(M) = VMODE1
125 IF(MODE(M,KF) .NE. 0) GO TO 56
126 CONTINUE
127 56 CONTINUE
128 C
129 DO 65 MD=1,NM
130 DO 65 LF=1,4
131 CALL FUNSPL (MD,LF)
132 CONTINUE
133 C
134 C..BEGIN
135 70 FO = FREQ0*1000.0
136 FL = FREQ0*1000.0
137 FU = FREQ0*1000.0
138 FC = CHIPFR*1000.
139 F1 = FREQ1*1000.0
140 F2 = FREQ2*1000.0
141 F3 = FREQ3*1000.0
142 DELTAF = (FU-FL)/NRPTS
143 DELTAU = (TAUMAX-TAUI)/(FLOAT(NUMTAU))-1.)
144 C
145 IF(IPLT .EQ. 0) GO TO 90
146 XMIN=AINT(FREQ( 1)/10000.)*10.
147 XMAX=AINT(FREQ(NF)/10000.+0.99)*10.
148 IF(IFLGTR .EQ. 4) XMAX=FREQ3
149 XTIC=1.
150 SCALEX=(XMAX-XMIN)/XLNG
151 C
152 IF (FREQ0 .EQ. FREQS .AND. PULSEW .EQ. PULSES .AND. CHIPFR .EQ.
153 $ CHIPS .AND. PULSED .EQ. PULSDS . AND. NUMPLS .EQ. NMPLS)
154 $ GO TO 80
155 C
156 C TRANSMITTER SPECTRUM PLOT
157 CALL TPLOT(FREQ,FL,FC,FC,DELTAF,NRPT1,NF)
158 C
159 80 IF (FREQ0 .EQ. FREQS .AND. FREQ3 .EQ. FREQ3S .AND. Q .EQ.
160 $ QS) GO TO 90
161 C
162 C RECEIVER SPECTRUM PLOT
163 CALL RPLOT(FREQ,FL,F1,F2,F3,DELTAF,P,Q,NRPT1,NF)
164 C
165 90 FREQS=FREQ0
166 PULSES=PULSEW
167 FREQ3S = FREQ3
168 CHIPS = CHIPFR

```

```

169 PULSDS = PULSED
170 NMPLS = NUMPLS
171 QS = Q
172
173 C..LOOP OVER RECEIVER DISTANCES
174 RHO=RHOIN
175 PRINT 1090,RHO
176 PRINT 1091
177 CALL CPPLGT(FREQ,FL,FO,FC,DELTA, NRPT1,NF,F1,F2,F3,P,Q,RHO)
178
179 C..OUTPUT WAVEFORM
180 IF(INTFLG.EQ.0)THEN
181 IF(IFLGR.EQ.1.OR.IFLGR.EQ.2) PRINT 906
182 IF(IFLGR.EQ.3) PRINT 905
183 IF(IFLGR.EQ.4) PRINT 904
184 MS = 1
185 IF(TAUO.LT.0.)THEN
186 DO 400 LL = 1,NRPTS
187 XS(LL) = X(LL)
188 YS(LL) = Y(LL)
189 CALL NLOGN(NFFT,XS,YS,-1.0,FL,FU)
190 DO 401 LL = 1,NRPTS
191 TAU = -(LL-1)/(FU-FL)
192 IF(TAU.LT.TAUO)THEN
193 MS = LL-1
194 GO TO 402
195 END IF
196
197 401 CONTINUE
198 402 CONTINUE
199 IF(MS.LE.1)THEN
200 MS = 1
201 GO TO 407
202 END IF
203 NUMPTS = 0
204 DO 403 LL = 1,MS-1
205 INDEX = MS-LL+1
206 TAU = -(INDEX-1)/(FU-FL)
207 FCFTAU = CMLPX(XS(INDEX),YS(INDEX))*CEXP(IM*TWOPI*TAU*(FL-FO))
208 FOFTAU = CMLPX(XS(INDEX),YS(INDEX))*CEXP(IM*TWOPI*TAU*FO)
209 FOFTR = 2.0*FOFTAU*CEXP(IM*TWOPI*TAU*FO)
210 FOFTI = -IM*FOFTAU
211 ENVLOP = 2.*CABS(FOFTAU)
212 IF(ENVLOP.EQ.0.)THEN
213 CORR = -1000.
214 PHZF = -1000.
215 ELSE
216 CORR = 20.*ALG10(ENVLOP)
217 PHZF = ATAN2(FOFTI,FOFTR)
218 END IF
219 NUMPTS = NUMPTS+1
220 PLOTX(NUMPTS) = TAU*1.E3
221 IF (IFLGR.EQ.3) THEN
222 PLOTY(NUMPTS) = CORR
223 NS = 4
224 IF(NUMPTS.GT.1)THEN
225 PHZC = ASS(PHZF-PHZF1)
226 DO 408 NO = 1,7

```

```

226 IF (ABS(PHZF+(4-NQ)*TWOPI-PHZF1) .LT. PHZC) THEN
227 PHZC = ABS(PHZF + (4-NQ)*TWOPI-PHZF1)
228 NS = NQ
229 END IF
230 CONTINUE
231 PHZF = PHZF + (4-NS)*TWOPI
232 PHZF1 = PHZF
233 ELSE
234 PHZF1 = PHZF
235 END IF
236 PLOTY2(NUMPTS) = PHZF
237 PRINT 907, TAU, CORR, PHZF
238 ELSE
239 PLOTY1(NUMPTS)=ENVLOP
240 PLOTY2(NUMPTS) = TWCFTR
241 PRINT 908, TAU, 20.0*ALOG10(ENVLOP)
242 END IF
243 CONTINUE
244 END IF
245 CONTINUE
246 CALL NLOGN(NFFT,X,Y,1.0,FL,FU)
247 DO 404 LL = 1, NRPTS
248 TAU = (LL-1)/(FU-FL)
249 IF (TAU .GT. TAUMAX) THEN
250 MSTOP = LL-1
251 GO TO 405
252 END IF
253 CONTINUE
254 CONTINUE
255 NUMPTS = MS-1
256 DO 406 LL = 1, MSTOP
257 TAU = (LL-1)/(FU-FL)
258 FOF TAU = CMLPX(X(LL),Y(LL))*CEXP(IM*TWOPI*TAU*(FL-F0))
259 FOFTR = FOF TAU
260 TWOFTR = 2.0*FOF TAU*CEXP(IM*TWOPI*TAU*F0)
261 FOF TI = -IM*FOF TAU
262 ENVLOP = 2.*CABS(FOF TAU)
263 CORR = 20.*ALOG10(ENVLOP)
264 PHZF = ATAN2(FOF TI, FOFTR)
265 NUMPTS = NUMPTS+1
266 PLOTX(NUMPTS) = TAU*1.E3
267 IF (IFLGR .EQ. 3) THEN
268 PLOTY1(NUMPTS)=CORR
269 NS = 4
270 IF (NUMPTS .GT. 1) THEN
271 PHZC = ABS(PHZF-PHZF1)
272 DO 409 NQ = 1, 7
273 IF (ABS(PHZF+(4-NQ)*TWOPI-PHZF1) .LT. PHZC) THEN
274 PHZC = ABS(PHZF + (4-NQ)*TWOPI-PHZF1)
275 NS = NQ
276 END IF
277 CONTINUE
278 PHZF = PHZF + (4-NS)*TWOPI
279 PHZF1 = PHZF
280 ELSE
281 PHZF1 = PHZF
282 END IF

```

```

283 PLOTY2(NUMPTS) = PHZF
284 PRINT 907,TAU,CORR,PHZF
285 ELSE
286 PLOTY1(NUMPTS) = ENVLOP
287 PLOTY2(NUMPTS) = TMOFTR
288 CALL INITWF(IFLGR,PULSEW,PULSED,NUMPLS,TAU0,TAUMAX,PLOTX3,PLOTY3)
289 PRINT 908,TAU,20.0*ALOG10(ENVLOP)
290 END IF
291
406 CONTINUE
292 ELSE
293 IF(IFLGR.EQ.1.OR.IFLGR.EQ.2) PRINT 910
294 IF(IFLGR.EQ.3) PRINT 909
295 IF(IFLGR.EQ.4) PRINT 912
296 TAU = TAU0
297 NUMPTS = 0
298 DO 310 JU=1,NUMTAU
299 CALL FILON(NFFT,X,Y,TAU,FU,FL,SUM,SUMP)
300 ERROR = CABS(SUM-SUMP)/CABS(SUM)
301 FOFTAU = SUM*CEXP(-IM*TAU*FO*TWOP1)
302 FOFTI = FOFTAU
303 FOFTL = -IM*FOFTAU
304 ENVLOP = 2.*CABS(FOFTAU)
305 IF(ENVLOP.EQ.0.) THEN
306 CORR = -1000.
307 PHZF = -1000.
308 ELSE
309 CORR = 20.*ALOG10(ENVLOP)
310 PHZF = ATAN2(FOFTI,FOFTR)
311 END IF
312 NUMPTS = NUMPTS+1
313 PLOTX(NUMPTS) = TAU*1.E3
314 IF (IFLGR.EQ.3) THEN
315 PLOTY1(NUMPTS) = CORR
316 NS = 4
317 IF(NUMPTS.GT.1) THEN
318 PHZC = ABS(PHZF-PHZF1)
319 DO 410 NQ = 1,7
320 IF(ABS(PHZF+(4-NQ)*TWOP1-PHZF1).LT.PHZC) THEN
321 PHZC = ABS(PHZF + (4-NQ)*TWOP1-PHZF1)
322 NS = NQ
323 END IF
410 CONTINUE
324 PHZF = PHZF + (4-NS)*TWOP1
325 PHZF1 = PHZF
326 ELSE
327 PHZF1 = PHZF
328 END IF
329 PLOTY2(NUMPTS) = PHZF
330 PRINT 911,TAU,CORR,PHZF,ERROR
331 ELSE
332 PLOTY1(NUMPTS) = ENVLOP
333 CALL INITWF(IFLGR,PULSEW,PULSED,NUMPLS,TAU0,TAUMAX,PLOTX3,PLOTY3)
334 PRINT 907,TAU,20.0*ALOG10(ENVLOP),ERROR
335 END IF
336 TAU = TAU+DELTAU
337
310 CONTINUE
338 END IF
339

```

```

340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368

C
CALL WOPLOT(RHO)
RHO = RHO + DELRHO
IF(RHO .LT. RHO MAX+1.E-10) GO TO 91
GO TO 9

C
C
904 FORMAT('1',4X,'TAU(SEC)',3X,' OUTPUT',/,17X,'DB/UV/M')
905 FORMAT('1',4X,'TAU(SEC)',2X,'CORRELATION',4X,'PHASE',/15X,'DB/UV/M'
$-KX',5X,'RAD')
906 FORMAT('1',4X,'TAU(SEC)',3X,'ENVELOP',/,14X,'DB/UV/M-KW')
907 FORMAT('1',2E12.5,3X,E12.5)
908 FORMAT('1',2E12.5)
909 FORMAT('1',4X,'TAU(SEC)',2X,'CORRELATION',4X,'PHASE',4X,'REL ERROR
$/15X,'DB/UV/M-KW',6X,'RAD')
910 FORMAT('1',4X,'TAU(SEC)',3X,'ENVELOP',4X,'REL ERROR',/,15X,
$ 'DB/UV,M-KW')
911 FORMAT('1',4E12.5)
912 FORMAT('1',4X,'TAU(SEC)',3X,' OUTPUT',4X,'REL ERROR',/,17X,
$ 'DB/UV/M')
1040 FORMAT('1',2BX,'NMF',4X,'FREQ',3X,'THETA',4X,'THETA',8X,
$ 'ATT',6X,'PHVOC',/36X,'KHZ',4X,'DEGREES',3X,'DEGREES',7X,'DB')
1041 FORMAT(/2X,15,5/10.5)
1043 FORMAT(41X,4F10.5)
1090 FORMAT('1R-0 = ',F6.0)
1091 FORMAT(14X,'FREQ(HZ)',4X,'XMTR R',6X,'XMTR I',6X,'RCVR R',6X,
$ 'RCVR I',6X,'CHNL R',6X,'CHNL I',8X,'XMTR*RCVR*CHNL',
$ 10X,'K'/90X,'REAL',8X,'IMAG')
END

```

```

1 SUBROUTINE INPUT
2 C..THIS ROUTINE READS NAMELIST DATA AND MODE CONSTANT DATA
3 C
4 C
5 C
6 INCLUDE SPECANS.COMMON:SPEC5.LIST
7 COMMON/THREE/TP(NRMODE),RATIO(4,NRMODE),FRO,KF,NMF
8 COMMON/FOUR/NFFT,FREQ,FREQ0,INPRT,TAUMAX,FREQ0,PULSEW,
9 RHOIN,DEL RHO,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,
10 IFLGTR,INTFLG,NPRT,TAU0,NUMTAU,CHIPFR,NUMPLS,PULSED,
11 IPLOT,IPLT1
12 COMMON/FIVE/SIGMA,EPSPR,NRPTS,NRPT1,NEWD
13 COMMON/EIGHT/LABEL,LABELR,LABELC
14 COMMON/CON12/FREQ1,FREQ2,FREQ3,P,Q
15 C
16 PARAMETER NRSAVE=NRMODE*10+3
17 DIMENSION SAVENC(NRSAVE)
18 EQUIVALENCE (TP,SAVENC)
19 C
20 COMPLEX TMP1,TMP2,TMP3,TMP4,TP,STP,RATIO
21 REAL INCL
22 CHARACTER*50 LABEL,LABELR,LABELC
23 CHARACTER*4 IOCNIL(2)
24 C
25 NAMELIST/DATUM/NFFT,FREQ,FREQ0,INPRT,TAUMAX,FREQ0,PULSEW,
26 PHOMIN,DEL RHO,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,IFLGTR,
27 INTFLG,NPRT,TAU0,NUMTAU,CHIPFR,NUMPLS,PULSED,
28 FREQ1,FREQ2,FREQ3,P,Q,IPLT,IPLT1
29 C
30 DATA DFR/0.0174 53292 51994 32957 69237/
31 DATA NFFT/11/, INPRT/100/,IPLT/0/,IPLT1/0/
32 DATA FREQ/100.0/,FREQ0/0.0/,TAUMAX/.002/
33 DATA RHOMIN/100.0/,RHOMAX/1000.0/,DEL RHO/1000.0/
34 DATA FREQ/23./,PULSEW'600./, IFLGTR/1/,INTFLG/0/,
35 NPRT/40/,TAU0/-0.001/,NUMTAU/41/,NUMPLS/1/,
36 PULSED/60./,CHIPFR/1./
37 DATA FREQ1/0.01/,FREQ2/0.0/,FREQ3/2.5/,P/0.0/,Q/2.0/
38 DATA INCL,THETA,TALT,RALT,RALT/4*0./,ICOMP/1/
39 DATA NRSV/-1/
40 C
41 C
42 PRINT 1002
43 READ(5,1000,END=999) IOCNIL
44 PRINT 1001,IOCNIL
45 IF(IOCNIL(1) .EQ. 'NAME') GO TO 11
46 IF(IOCNIL(1) .EQ. 'DATA') GO TO 20
47 IF(IOCNIL(1) .EQ. 'STAR') GO TO 30
48 GO TO 994
49 C
50 C..READ NAMELIST DATA
51 READ(5,DATUM)
52 WRITE(6,DATUM)
53 C
54 NRPTS=2*NFFT

```



```

55 NRPT1=NRPTS+1
56 IF(NRPT1 .GT. NMAX) GO TO 990
57 GO TO 10
58
59 C
60 C..READ INPUT MODE CONSTANTS CARDS
61 READ 1005, LABELC
62 PRINT 1006, LABELC
63 KF=0
64 READ(5, 1021, END=989) FRQ, AZM, CDDP, BFLD, SGM, EPS
65 IF(FRQ .EQ. 0.) GO TO 29
66 IF(KF .EQ. NRFREQ) GO TO 991
67 SIGMA=SGM
68 EPSR=EPS
69 KF=KF+1
70 FREQ(KF)=FRQ*1000.
71 M=0
72 READ(5, 1023, END=989) INDX1, TR1, T11, TMP1, IMP2
73 IF(TR1 .EQ. 0.) GO TO 28
74 READ(5, 1023, END=989) INDX2, TR2, T12, TMP3, IMP4
75 IF(TR1 .NE. TR2 .OR. T11 .NE. T12) GO TO 992
76 IF(M .EQ. NRMODE) GO TO 993
77 M=M+1
78 RATIO(2, INDX1-1, M)=TMP1
79 RATIO(2, INDX1, M)=TMP2
80 RATIO(2, INDX2-1, M)=TMP3
81 RATIO(2, INDX2, M)=TMP4
82 TP(M)=C/PLX(TR1, T11)
83 STP=CSJN(TP(M)*DTR)
84 STPR(M, KF)=REAL(STP)
85 STPI(M, KF)=AIMAG(STP)
86 GO TO 23
87
88 C
89 C..END OF INPUT FOR FREQ(KF)
90 NMF=M
91 WRITE(2) SAVEMC
92 GO TO 21
93
94 C
95 C..END OF MODE CONSTANT INPUT
96 NF=KF
97 NEWD=1
98 REWIND 2
99 GO TO 10
100
101 C
102 IF(NEWD .EQ. -1) GO TO 995
103 RETURN
104 PRINT 1989
105 GO TO 999
106 PRINT 1990
107 GO TO 999
108 PRINT 1991
109 GO TO 999
110 PRINT 1992
111 GO TO 999
112 PRINT 1993
113 GO TO 999
114 PRINT 1994
115 GO TO 999

```

```

112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129

995 PRINT 1995
999 CALL PLOT(0.,0.,999)
STOP
1000 FORMAT(20A4)
1001 FORMAT('0',20A4)
1002 FORMAT('1',20A4)
1005 FORMAT(A50)
1008 FORMAT('0',A50)
1021 FORMAT(8X,3(2X,E8.0),2(2X,E10.0),2X,E5.0)
1023 FORMAT(11,2F9.0,1X,4E15.0)
1989 FORMAT('ERROR: PREMATURE END OF FREQUENCY DATA')
1990 FORMAT('ERROR: N IS TOO LARGE')
1991 FORMAT('ERROR: TOO MANY FREQUENCIES INPUT')
1992 FORMAT('ERROR: MODE CARDS OUT OF ORDER')
1993 FORMAT('ERROR: TOO MANY MODES INPUT')
1994 FORMAT('ERROR: UNRECOGNIZED CONTROL CARD')
1995 FORMAT('ERROR: NO MODE DATA')
END

```

```

1 SUBROUTINE HTGAIN(IOPT,FREQ,SIGMA,EPSPR,ALPHA,NRMODE,TP,Z,HG)
2 COMPLEX TP(1),HG(3,1),HGO/(0.1-.45749544)/
3 C,SSQ,NGSQ,SQROOT,RATIO,A1,A2,A3,A4,EXPZ,
4 MI/(0.1-.1)/,ONE/(1.,0.)/
5 COMPLEX*16 TPM,PO,H10,H20,H1PRM0,H2PRM0,P1,H1Z,H2Z,H1PRMZ,H2PRMZ
6 RLAL K,KA13,KA23
7 DATA DTR/1.745329252E-02/
8
9 C
10 NGSQ=CMPLX(EPSPR,-SIGMA/(5.5633459E-8*FREQ))
11 K=2.0952426E-02*FREQ
12 IF(ALPHA.EQ. 0.) GO TO 5
13 AK=ALPHA/K
14 AK13=EXP(ALOG(AK)/3.)
15 AK23=AK13**2
16 KA13=1..AK13
17 KA23=KA13**2
18 P1=KA23*ALPHA*Z
19 EXPZ=EXP(-5*ALPHA*Z)
20 DO 20 M=1,NRMODE
21 SSQ=CSH(TP(M)*DTR)**2
22 CSQ=CMC-SSQ
23 SOROOT=CSQRT(NGSQ-SSQ)
24 IF(AIMAG(TP(M)).LE.-10..GR. ALPHA.EQ. 0.) GO TO 10
25 TPM=TP(M)
26 PO=KA23*(ONE-SSQ)
27 CALL MSHR1(PO,H10,H20,H1PRM0,H2PRM0,TPM,'HG 1')
28 CALL MSHR2(PG+P1,H1Z,H2Z,H1PRMZ,H2PRMZ,TPM,'HG 2')
29 A1=H10 -H2Z -H1Z *H20
30 A2=H1PRM0*H2Z -H1Z *H2PRM0
31 A3=H10 *H2PRMZ-H1PRMZ*H20
32 A4=H1PRM0*H2PRMZ-H1PRMZ*H2PRM0
33 RATIO=SQROOT/NGSQ
34 C=.5*AK23*KA13*MI*RATIO
35 HG(1,M)=EXPZ*(C*A1+A2)
36 HG(2,M)=KA13*MI*SQROOT*A1+A2
37 HG(3,M)=.5*AK*MI*HG(1,M)+AK13*MI*EXPZ*(C*A3+A4)
38 IF(IOPT.LQ. 1) GO TO 20
39 HG(1,M)=HG(1,M)/HGO
40 HG(2,M)=HG(2,M)/HGO
41 HG(3,M)=HG(3,M)/(RATIO*HGO)
42 CO TO 20
43 C=CSQRT(ONE-SSQ)
44 EXPZ=EXP(CMPLX(C,K*Z)*C)
45 A1=(NGSQ-C*SQROOT)/(NGSQ+C*SQROOT)
46 A2=(C-SQROOT)/(C+SQROOT)
47 HG(1,M)=EXPZ*A1/EXPZ
48 HG(2,M)=EXPZ*A2/EXPZ
49 HG(3,M)=(EXPZ-A1/EXPZ)*C
50 IF(IOPT.EQ. 1) GO TO 20
51 HG(1,M)=HG(1,M)/(ONE+A1)
52 HG(2,M)=HG(2,M)/(ONE+A2)
53 HG(3,M)=HG(3,M)/((ONE-A1)*C)
54 CONTINUE
55 RETURN

```

END

55

1		SUBROUTINE FUNSPL(MD,LF)
2	C	INCLUDE SPECS.COMMONSPECS.LIST
3		CALL FUNCVF(MD,LF)
4	C	CALL SPLINE(XX,YY,B,C,D,LM)
5		DO 46 I=1,NF
6		YC(LF,MD,I)=YY(I)
7		BC(LF,MD,I)=B(I)
8		CC(LF,MD,I)=C(I)
9		DC(LF,MD,I)=D(I)
10		CONTINUE
11		RETURN
12	46	END
13		
14		

```

1 SUBROUTINE TPLOT(FREQ,FL,FO,FC,DELTA, NRPT1,NF)
2 C..CALCULATE X AND Y COORDINATES FOR TRANSMITTER SPECTRUM PLOT
3 C
4 COMPLEX XMTR
5 REAL INCL
6 CHARACTER*50 LABEL1,LABELR,LABELC
7 CHARACTER*24 LABEL1
8 CHARACTER*20 LABEL2
9 CHARACTER*40 PLTLBL
10 CHARACTER*30 TLABEL(4)
11 PARAMETER NMAX=2049
12 COMMON/FOUR/NFFT,FREQ,FREQI,INTPRT,TAUMAX,FREQO,PULSEW,
13 $ RHOMIN,DELHO,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,
14 $ IFLGTR,INTFLG,NRPT,TAUG,NUMTAU,CHIPFR,NUMPLS,PULSED,
15 $ IPLOT,IPLOT1
16 COMMON/SIX/PLOTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMPTS
17 COMMON/EIGHT/LABEL1,LABELR,LABELC
18 DIMENSION FREQ(1)
19 DATA LABEL/'FOR SQUARE WAVE'
20 $ 'FOR GAUSSIAN'
21 $ 'FOR MSK SIGNAL FORMAT'
22 $ 'FOR SLOW WAVE TAIL CALCULATION'/'
23 C
24 NUMPTS = 0
25 F=FL
26 DO 71 K=1,NRPT1
27 CALL TRXMTR(K,F,FO,FC,PULSEW,PULSED,NUMPLS,IFLGR,LABELT,XMTR)
28 IF(F.LT. FREQ(1)).OR. F.GT. FREQ(NF)) GO TO 71
29 NUMPTS = NUMPTS+1
30 PLOTX(NUMPTS) = F/1000.
31 IF(IFLGR.EQ. 4) PLOTX(NUMPTS)=ALOG10(PLOTX(NUMPTS))
32 IF(CABS(XMTR).EQ. 0.)THEN
33 PLOTY1(NUMPTS) = -1000.
34 ELSE
35 PLOTY1(NUMPTS) = 20.*ALOG10(CABS(XMTR))
36 END IF
37 F=F+DELTA
38 71 C
39 LABEL1=' 20*LOG(XMTR)
40 LABEL2='TRANSMITTER SPECTRUM'
41 IF(IFLGR.EQ. 4) THEN
42 SCALEY=10.
43 ELSE
44 SCALEY=20.
45 ENDIF
46 CALL PLSPEC(PLOTX,PLOTY1,NUMPTS,LABELT,LABEL1,LABEL2,SCALEY)
47 XL = 2.1
48 YL = -0.4
49 IF(IFLGR.EQ. 4) YL=-0.6
50 CALL SYMBOL(XL,YL,.1,TLABEL(IFLGR),0.,.30)
51 XL = 0.0
52 YL = -0.8
53 IF(IFLGR.EQ. 1 .OR. IFLGR.EQ. 2) THEN
54 ENCODE(40,900,PLTLBL) NUMPLS

```

```

55 900 FORMAT('NUMBER OF PULSES = ',I2)
56   CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
57   YL = YL-0.2
58   IF(IFLGR .EQ. 1) THEN
59     ENCODE(40,905,PLTLBL) PULSEW
60     FORMAT('PULSE WIDTH = ',F6.1,' MICRO-SEC')
61   ELSE
62     ENCODE(40,906,PLTLBL) PULSEW
63     FORMAT('1/E HALF WIDTH = ',F6.1,' MICRO-SEC')
64   ENDIF
65   CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
66   YL = YL-0.2
67   ENCODE(40,910,PLTLBL) PULSED
68   FORMAT('PULSE DELAY = ',F6.1,' MICRO-SEC')
69   CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
70   ENDIF
71   IF(IFLGR .EQ. 3) THEN
72     ENCODE(40,915,PLTLBL) CHIPFR
73     FORMAT('CHIP FREQ = ',F5.2,' KHZ')
74   CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
75   ENDIF
76   CALL PLOT(0.,0.,-4)
77   RETURN
78   END
79

```

C

```

1  SUBROUTINE TRNTR(K,F,FO,FC,PULSEW,PULSED,NUMPLS,IFLGTR,LABELT,
2  XMTR)
3  $ COMPLEX XMTR,IM/(0.,1.)/,OMEGA,HOMEGA,FAC1,FAC2,H1,H2
4  $,RATIO1,RATIO2,TERM
5  CHARACTER*50 LABEL
6  DIMENSION AA(4),GAMMA(4)
7  DATA AA/-16.8E3,15.35E3,1.0E3,0.45E3/
8  DATA GAMMA/5.88E5,3.03E4,2.0E3,1.47E2/
9  DATA TAUP/43.0E-6/,TAUV/180.9E-6/,VO/3.5E7/
10 DATA PI/3.1415926/
11 DATA TWGP/5.2831853/
12 IFLGR = 1 FOR SQUARE WAVE INPUT
13 IFLGR = 2 FOR GAUSSIAN INPUT
14 IFLGR = 3 FOR POWER SPECTRUM OF FSK SIGNAL WITH
15 IFLGR = 4 FOR SLOW WAVE TAIL CALCULATION WILLIAMS SOURCE
16 MODULATION INDEX 0.5
17 GO TO (300,400,500,600) IFLGR
18
19 C 300 CONTINUE
20 IF (K.GT. 1) GO TO 20
21 OMEGA = TWGP/FO
22 TW = PULSEW*1.E-6
23 TD = PULSED*1.E-6
24 FREQO = FO*1.E-3
25 ENCODE(CO,11,LABEL) FREQO
26 11 FORMAT('CARRIER FREQ = ',FS.1,' KHZ')
27
28 C 20 OMEGA = TWGP/FO
29 IF (ABS((OMEGA-OMEGA0)*TW).GT. 1.E-4) GO TO 21
30 GOMEGA = -0.5*IM*TW-(CEXP(-IM*2.*OMEGA0*TW)-1.)/(4.*OMEGA0)
31 GO TO 23
32 21 IR(ABS((OMEGA+OMEGA0)*TW).GT. 1.E-4)GO TO 22
33 GOMEGA = 0.5*IM*TW-(CEXP(IM*2.*OMEGA0*TW)-1.)/(4.*OMEGA0)
34 GO TO 23
35 22 GOMEGA = -0.5*(CEXP(IM*(OMEGA-OMEGA0)*TW)-1.)/(OMEGA0
36 -OMEGA)-0.5*(CEXP(-IM*(OMEGA+OMEGA0)*TW)-1.)/(
37 OMEGA+OMEGA)
38 $ 23 CONTINUE
39 DO 28 NR=1,NUMPLS
40 IF(NR.EQ. 1)THEN
41 HOMEGA=(1.,0.)
42 RATIO1 = CEXP(-IM*OMEGA*(TW+TD))
43 ELSE
44 HOMEGA = HOMEGA+RATIO1
45 RATIO1 = RATIO1+RATIO1
46 END IF
47 28 CONTINUE
48 XMTR = GOMEGA+HOMEGA*CEXP(IM*OMEGA*TW/2.)*2.386E8/FO
49 RETURN
50 C 400 CONTINUE
51 IF (K.GT. 1) GO TO 40
52 OMEGA = TWGP/FO
53 TW = PULSEW*1.E-6
54

```



```

55 TD = PULSED*1.E-6
56 FREQ0 = FO*1.E-3
57 ENCODE(50,11,LABELT) FREQ0
58
59 C
60 OMEGA = TWOPI*F
61 EXP1 = (OMEGA-OMEGA)*TW**2/4.
62 EXP2 = ((OMEGA+OMEGA)*TW)**2/4.
63 IF(LEXP1 .LT. 1.E20) THEN
64 FAC1 = EXP(-EXP1)/(2.*IM)
65 ELSE
66 FAC1 = C.
67 END IF
68 IF(LEXP2 .LT. 1.E20) THEN
69 FAC2 = IM*EXP(-EXP2)/2.
70 ELSE
71 FAC2 = 0.
72 END IF
73 DO 48 NN = 1,NUMPLS
74 IF(NN .EQ. 1) THEN
75 H1 = (1.,0.)
76 H2 = (1.,0.)
77 RATIO1 = CEXP(IM*(OMEGA-OMEGA)*TD)
78 RATIO2 = CEXP(-IM*(OMEGA+OMEGA)*TD)
79 ELSE
80 H1 = H1+RATIO1
81 H2 = H2+RATIO2
82 RATIO1 = RATIO1*RATIO1
83 RATIO2 = RATIO2*RATIO2
84 END IF
85
86 48 CONTINUE
87 XMTR = (FAC1*H1+FAC2*H2)*4.229E8*TW/FO
88 RETURN
89
90 C
91 500 CONTINUE
92 IF (K .GT. 1) GO TO 50
93 PISO = PI**2
94 CONST = R./(PISO*FC)
95 FREQ0 = FO*1.E-3
96 FCHIP = FC*1.E-3
97 ENCODE(50,11,LABELT) FREQ0
98 EPS = (F-FO)/FC-.25
99 XMTR = PISO/(16.*(1.+2.*EPS)**2)
100 XMTR = XMTR*(COS((F+FO)*TWOPI/FC))**2/(1.-16.*(F+FO)**2/FC**2)**2
101 XMTR = CONST*XMTR
102 GO TO 53
103
104 51 IF (ABS((F-FO)/FC+.25) .GT. 1.E-4) GO TO 52
105 EPS = (F-FO)/FC+.25
106 XMTR = PISO/(16.*(1.+2.*EPS)**2)
107 XMTR = XMTR*(COS((F+FO)*TWOPI/FC))**2/(1.-16.*(F+FO)**2/FC**2)**2
108 XMTR = CONST*XMTR
109 GO TO 53
110
111 52 XMTR = (COS((F-FO)*TWOPI/FC))**2/(1.-16.*(F-FO)**2/FC**2)**2
112 XMTR = XMTR*(COS((F+FO)*TWOPI/FC))**2/(1.-16.*(F+FO)**2/FC**2)**2
113 CCNTINUE
114 XMTR = 2.586E8*XMTR/FO
115

```

```

112 RETURN
113
114 C
115 600 CONTINUE
116 IF(K.GT.1) GO TO 60
117 ENCODE(50,12,LABELT)
118 FORMAT('WILLIAMS SOURCE')
119 CONTINUE
120 XMTR = (0.0,0.0)
121 OMEGA = TWOPI*F
122 DO 30 I=1,4
123 TERM = IM*OMEGA+SINMA(I)
124 XMTR = XMTR+AA(I)/(TERM**2)+(1.0-CEXP(-TAUP*TERM))/(1.0+TAUV*TERM)
125 XMTR = XMTR*VO
126 RETURN
127 END

```

```

1 SUBROUTINE RPLOT(FREQ,FL,F1,F2,F3,DELTA,P,Q,NRPT1,NF)
2 C--CALCULATE X AND Y COORDINATES FOR RECEIVER SPECTRUM PLOT
3 C
4 REAL INCL
5 COMPLEX RCVR
6 CHARACTER*50 LABEL1,LABELR,LABELC
7 CHARACTER*24 LABEL1
8 CHARACTER*20 LABEL2
9 PARAMETER NMAX=2049
10 COMMON/FOUR/NRPT,FREQ,FREQ1,INIPRT,TAUNAX,FREQD,PULSEM,
11 RHOVIN,DELROD,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,
12 $ IFLGTR,INTFLG,NRPT1,TAU0,NUNTAU,CHIPFR,NUMPLS,PULSED,
13 $ IPILOT,IPILOT1
14 COMMON/SIX/PLOTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMPTS
15 COMMON/EIGHT/LABEL1,LABELR,LABELC
16 DIMENSION FREQ(1)
17 C
18 C
19 NUMPTS = 0
20 F=FL
21 DO 81 K=1,NRPT1
22 CALL RCVR(K,F1,F2,F3,LABELR,P,Q,RCVR)
23 IF(F.LT. FREQ(1) .OR. F .GT. FREQ(NF)) GO TO 81
24 NUMPTS = NUMPTS+1
25 PLOTX(NUMPTS) = F/1000.
26 IF(IFLGTR .EQ. 4) PLOTX(NUMPTS)=ALOG10(PLOTX(NUMPTS))
27 PLOTY1(NUMPTS) = 20.0*ALOG10(CABS(RCVR))
28 F=F+DELTA
29 81 C
30 LABEL1=' 20*LOG(RCVR)'
31 LABEL2='RECEIVER SPECTRUM'
32 SCALEY=10.
33 CALL PLSPEC(PLOTX,PLOTY1,NUMPTS,LABELR,LABEL1,LABEL2,SCALEY)
34 CALL PLOT(0.,0.,-4)
35 C
36 RETURN
37 END

```

```

1  SUBROUTINE RECVR(K,F,F1,F2,F3,LABELR,P,Q,RCVR)
2  COMPLEX RCVR,IM/(0.0,1.0)/
3  CHARACTER*50 LABELR
4  IF(K.GT. 1) GO TO 20
5  FREQ1 = F1+1.0E-3
6  FREQ2 = F2+1.0E-3
7  FREQ3 = F3+1.0E-3
8  IF(P.EQ. 0.0) THEN
9    ENCODE(50,10,LABELR) INT(P),INT(Q),FREQ2,FREQ3
10   FORMAT('P=',I1,' Q=',I1,' F2=',F6.3,'KHZ F3=',F6.3,'KHZ')
11   ELSE
12   ENCODE(50,11,LABELR) INT(P),INT(Q),FREQ1,FREQ2,FREQ3
13   FORMAT('P=',I1,' Q=',I1,' F1=',F6.3,'KHZ F2=',F6.3,'KHZ F3=',
14   $ F6.3,'KHZ')
15   ENDIF
16   CONTINUE
17   IF(F.EQ. 0.0) THEN
18     IF(P.EQ. 0.0) THEN
19       RCVR = 1.0/(1.0+IM*(F-F2)/F3)**Q+1.0/(1.0+IM*(F+F2)/F3)**Q
20     ELSE
21       RCVR = (0.0,0.0)
22     ENDIF
23   ELSE
24     RCVR = (IM*F/F1)**P/(1.0+IM*F/F1)**P*(1.0/(1.0+IM*(F-F2)/F3)**Q
25     $ +1.0/(1.0+IM*(F+F2)/F3)**Q)
26   ENDIF
27   IF(F2.EQ. 0.0) RCVR=RCVR/2.0
28   RETURN
29   END

```

```

1  SUBROUTINE PLSPEC(PLOTX,PLOTY1,NUMPTS,LABEL,LABEL1,LABEL2,SCALEY)
2  C..DRAW BORDER,CURVE,X-LABEL,Y-LABEL, AND SPECTRUM LABELS FOR ALL PLOTS
3  REAL INCL
4  CHARACTER*50 LABEL
5  CHARACTER*24 LABEL1
6  CHARACTER*20 LABEL2
7  DIMENSION FTIC(40)
8  PARAMETER NMAX=2049
9  LOGICAL WP(NMAX)
10 COMMON/FOUR/NFFT,FREQ,FREQI,INTPRT,TAUMAX,FREQO,PULSEW,
11 $ RHOMIN,DELPHO,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,
12 $ IFLGTR,INFLG,NPRINT,TAUO,NUMTAU,CHIPFR,NUMPLS,PULSED,
13 $ IPLOT,IPLOT1
14 COMMON/SEVEN/XMIN,XMAX,XTIC,SCALEX,XLNG,YLNG
15 COMMON/TEN/XL,YL
16 DIMENSION PLOTX(1),PLOTY1(1)
17
18 YMAX=PLOTY1(1)
19 DO 72 K=2,NUMPTS
20 IF(YMAX.LT. PLOTY1(K)) YMAX=PLOTY1(K)
21 CONTINUE
22 IF(YMAX.GE. 0.0) THEN
23 YMAX=AINT(YMAX/10.+99)*10.
24 ELSE
25 YMAX = INT(YMAX/10.0)*10.0
26 ENDIF
27 YMIN=YMAX-SCALEY*YLNG
28 YTIC=10.
29 DO 73 K=1,NUMPTS
30 UP(K)=.FALSE.
31 IF(PLOTY1(K).GE. YMIN) GO TO 73
32 UP(K)=.TRUE.
33 CONTINUE
34 CALL PLOT(1.,3.,-3)
35 IF(IFLGT .EQ. 4) THEN
36 XMIN=-3.0
37 XMAX=ALOG10(3.0)
38 SCALEX=(XMAX-XMIN)/XLNG
39 CALL LOGTIC(XMIN,XMAX,FTIC,40,NRTIC)
40 CALL BORDER(XLNG,XMIN,XMAX,FTIC,NRTIC,YLNG,YMIN,YMAX,YTIC,1)
41 CALL SYMBOL(-2,-3.,1,'10',0.,2)
42 CALL SYMBOL(4.5,-3.,1,'10',0.,2)
43 ELSE
44 CALL BORDER(XLNG,XMIN,XMAX,XTIC,1, YLNG,YMIN,YMAX,YTIC,1)
45 ENDIF
46 CALL CURVE(PLOTX,PLOTY1,UP,NUMPTS,XMIN,YMIN,SCALEX,SCALEY,1)
47 XL=-.2
48 YL=.5*(YLNG-2.2)
49 CALL SYMBOL(XL,YL,.1,LABEL1,90.,24)
50 XL=.5*(XLNG-1.0)
51 YL=-.2
52 CALL SYMBOL(XL,YL,.1,'FREQ (KHZ)',0.,10)
53 XL=0.
54 YL=YL-.2

```

```
55 IF(IFLGTR .EQ. 4) YL=YL-.2  
56 CALL SYMBOL(XL,YL,.1,LABEL2,0.,.20)  
57 YL=YL-.2  
58 CALL SYMBOL(XL,YL,.1,LABEL ,0.,.50)  
59  
60 RETURN  
61 END
```

C

55  
56  
57  
58  
59  
60  
61

```

1 SUBROUTINE CPLOT(FREQ,FL,FC,FC,DELTA, NRPT1,NF,F1,F2,F3,P,Q,RHO)
2 C..CALCULATE X AND Y COORDINATES FOR CHANNEL SPECTRUM PLOT
3 C AND PRODUCT SPECTRUM PLOT
4 C
5 COMPLEX XMTR,RCVR,CHNL,PROD
6 REAL INCL
7 CHARACTER*50 LABEL,LABELR,LABELC
8 CHARACTER*40 PLTLBL
9 CHARACTER*24 LABEL1
10 CHARACTER*20 LABEL2
11 PARAMETER (NMAX=2049)
12 COMMON/FOUR/NFFT,FREQ,FREQ0,INTPRT,TAUMAX,FREQ0,PULSEW,
13 RHO,MIN,DELTA,RHO,MAX,TALT,INCL,THETA,ICOMP,
14 $ IFLGTR,INTELG,NRPT1,TAU0,NUMTAU,CHIPFR,NUMPLS,PULSED,
15 $ IFLGTR,INTELG,NRPT1,TAU0,NUMTAU,CHIPFR,NUMPLS,PULSED,
16 $ IFLGTR,INTELG,NRPT1,TAU0,NUMTAU,CHIPFR,NUMPLS,PULSED,
17 COMMON/SIX/PLOTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMPTS
18 COMMON/EIGHT/LABEL,LABELR,LABELC
19 COMMON/NINE/X(NMAX),Y(NMAX)
20 COMMON/TEN/XL,YL
21 DIMENSION FREQ(1)
22 NUMPTS = 0
23 F=FL
24 DO 93 K=1,NRPT1
25 CALL TRMTR(Y,F,FO,FC,PULSEW,PULSED,NUMPLS,IFLGTR,LABEL,XMTR)
26 CALL RCVR(K,F,F1,F2,F3,LABELR,P,Q,RCVR)
27 CALL CHNL(F,RHO,CHNL)
28 PROD=XMTR*RCVR*CHNL
29 X(K)= REAL(PROD)
30 Y(K)=AIMAG(PROD)
31 IF(.GT. FREQ(1) .OR. F .GT. FREQ(NF)) GO TO 92
32 IF(IPLOT1 .NE. 0) THEN
33 NUMPTS = NUMPTS+1
34 PLOTX(NUMPTS) = F/1000.
35 IF(IFLGR .EQ. 4) PLOTX(NUMPTS)=ALOG10(PLOTX(NUMPTS))
36 PLOTY1(NUMPTS) = 20.0*ALOG10(CABS(CHNL))
37 AUX = CABS(CMPLX(X(K),Y(K)))
38 IF(AUX .EQ. 0.) THEN
39 PLOTY2(NUMPTS) = -1000.
40 ELSE
41 PLOTY2(NUMPTS) = 20.*ALOG10(AUX)
42 END IF
43 ENDIF
44 IF(K .GT. NRPT1 .AND. MOD(K,INTPRT) .NE. 0) GO TO 93
45 PRINT 1092,F,XMTR,RCVR,CHNL,X(K),Y(K),K
46 F=F+DELTA
47
48 IF(IPLOT1 .EQ. 0) RETURN
49
50 IF(RHO .EQ. 0.0) GO TO 110
51
52 CHANNEL SPECTRUM PLOT
53 LABEL1=' 20*LOG(CHNL)
54 LABEL2='CHANNEL SPECTRUM

```

```

55 SCALEY=10.
56 CALL PLSPEC(PLOTX, PLOTY1, NUMPTS, LABELC, LABEL1, LABEL2, SCALEY)
57 CALL PLABEL(RHO)
58 CALL PLOT(0.,0.,-4)
59
60 C PRODUCT SPECTRUM PLOT
61 SCALEY=20.
62 LABEL1=' 20*LOG(XMTR*RCVR*CHNL)
63 LABEL2=' PRODUCT SPECTRUM
64 CALL PLSPEC(PLOTX, PLOTY2, NUMPTS, LABELT, LABEL1, LABEL2, SCALEY)
65 YL=YL-.2
66 CALL SYMBOL(XL,YL,.1,LABELR,0.,50)
67 YL=YL-.2
68 CALL SYMBOL(XL,YL,.1,LABELC,0.,50)
69 CALL PLABEL(RHO)
70 IF(IFLGTH EQ. 3) THEN
71 ENCODE(40,915,PLTLBL) CHIPFR
72 FORMAT('CHIP FREQ =',F5.2,' KHZ')
73 YL=YL-.2
74 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
75 ENDIF
76 CALL PLOT(0.,0.,-4)
77 RETURN
78 FORMAT(11X,1P3E12.4,16)
79 END

```



```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39

```

C  
C  
C  
C  
23  
25  
30  
33  
45  
99

```

SUBROUTINE CHANEL(F,RHO,CHNL)
INCLUDE SPECANS.COMMONSPECS,LIST
COMPLEX IM/(0.0,1.0)/,CONST,MSUM,MIKRHO,STP,EXC,CHNL
DIMENSION E(4)
CHNL=(1.,0.)
IF(RHO .EQ. 0.) GO TO 99
CONST = 9.223E-8*(IM*F)**1.5/SQRT(SIN(RHO/6371.))
MSUM = (0.0,0.0)
DO 45 MD=1,NM
  LF=0
  INIT=0
  LF=LF+1
  DO 25 I=1,NF
    IF(MODE(MD,I) .EQ. 0) GO TO 25
    JJ = I-KK(MD)+1
    MF = MODE(MD,I)
    XX(JJ)= FREQ(I)
    YY(JJ)= YC(LF,MD,JJ)
    B(MJ) = EC(LF,MD,JJ)
    C(JJ) = CC(LF,MD,JJ)
    D(JJ) = DC(LF,MD,JJ)
  CONTINUE
  IF(F.GE.XX(1)) GO TO 30
  GO TO 45
  IF(F.LE.XX(MF)) GO TO 33
  GO TO 45
  E(LF)=SPEVAL(F,XX,YY,B,C,D,MF,INIT)
  IF(LF.LT.4) GO TO 23
  EXC=CMPLX(E(1),E(2))
  STP=CMPLX(E(3),E(4))
  MIKRHO=CRPLX(0.,-20.358445E-6*F*RHO)
  MSUM=MSUM+EXC*CEXP(MIKRHO*(STP-(1.,0.)))
  CONTINUE
CHNL=CONST*MSUM
RETURN
END

```

```

1  FUNCTION SPEVAL (XVAL, X, Y, B, C, D, N, INIT)
2  DIMENSION X(1), Y(1), B(1), C(1), D(1)
3
4  C SP EVAL EVALUATES THE INTERPOLATING CUBIC SPLINE
5  FOR THE DATA (X(I),Y(I)), I=1,...,N AT Y = XVAL.
6  C IT IS ASSUMED THAT THE CUBIC POLYNOMIALS GIVEN
7  IN B(I), C(I), D(I) HAVE BEEN PREVIOUSLY
8  COMPUTED BY THE SUBROUTINE SPLINE OR PSPLIN.
9  C INIT IS AN ESTIMATE OF THE INTERVAL WHERE XVAL
10  LIES, X(INIT) .LE. XVAL .LE. X(INIT+1), BUT NEED
11  NOT BE USED. SET INIT=0 IF THERE IS NO ESTIMATE.
12  C ON RETURN, INIT WILL CONTAIN THE INTERVAL NUMBER.
13  C
14
15  FN = N - 1
16  EPS = 1.0E-3 * (X(N) - X(1)) / FN
17  IF (XVAL .LT. X(1)-EPS) GO TO 800
18  IF (XVAL .GT. X(N)+EPS) GO TO 800
19  IF (INIT .LE. 0) GO TO 200
20  IF (INIT .GE. N) GO TO 200
21
22  IF (XVAL .LT. X(INIT)) GO TO 150
23  IF (XVAL .LT. X(INIT+1)) GO TO 300
24  IF (INIT+1 .GE. N) GO TO 300
25  INIT = INIT + 1
26  GO TO 100
27
28  150 INIT = INIT - 1
29  IF (INIT .LE. 0) GO TO 200
30  IF (XVAL .GE. X(INIT)) GO TO 300
31  GO TO 150
32
33  200 INIT = 1
34  GO TO 100
35
36  300 H = XVAL - X(INIT)
37  SPEVAL = ((D(INIT)+H + C(INIT))*H + B(INIT))*H + Y(INIT)
38  RETURN
39
40  800 PRINT 901, XVAL,X(1),X(N)
41  RETURN
42  901 FORMAT (' ERROR IN SP EVAL: XVAL OUT OF INTERPOLATION RANGE')
43  X(1) =',1PE12.5,' X(N) =',1PE12.5/
44  END

```

```

1  SUBROUTINE NLOGN (N,X,Y,SIGMT,A,B)
2  DIMENSION X(1), Y(1), M(15)
3  DATA TWOPI/6.2831 85307 17958 64769 25267/
4  DATA HALFPI/1.5707 96326 79489 66132 31322/
5  R(N) = 1
6  DO 1 I=N-1,1,-1
7  M(I) = M(I+1)+2
8  LY = M(1)-2
9  FLX = LY
10 V0 = SIGMT*TWOPI/FLX
11 FLX1 = (B-A)/FLX
12 NBLOCK = 1
13 LBLOCK = LX
14 DO 6 L = 1,N
15 LBHALF = LBLOCK/2
16 KO = 0
17 ISTART = 0
18 DO 5 IBLCK = 1, NBLOCK
19 FK = KO
20 V = V0*FK
21 Z1 = COS(V)
22 Z2 = SIN(V)
23 IF (ABS(V + HALFPI) .GE. 1.0E-6) GO TO 12
24 Z2 = -1.0
25 DO 2 I = 1, LBHALF
26 J = ISTART + I
27 K = J + LBHALF
28 Q1 = X(K)*Z1 - Y(K)*Z2
29 Q2 = Y(K)*Z1 + X(K)*Z2
30 X(K) = X(J) - Q1
31 Y(K) = Y(J) - Q2
32 X(J) = X(K) + Q1
33 Y(J) = Y(K) + Q2
34 CONTINUE
35 DO 3 I = 2, N
36 II = I
37 IF (AND(II,KO) .LE. 0) GO TO 4
38 KO = KO - M(II)
39 CONTINUE
40 KO = KO + M(II)
41 ISTART = ISTART + LBLOCK
42 CONTINUE
43 NBLOCK = NBLOCK*2
44 LBLOCK = LBLOCK/2
45 KO = 0
46 DO 50 K = 1, LX
47 K1 = KO + 1
48 IF (K1 .LE. K) GO TO 55
49 H1 = X(K1)
50 H2 = Y(K1)
51 X(K1) = X(K)
52 Y(K1) = Y(K)
53 X(K) = H1
54 Y(K) = H2

```

```

55 DO 85 I = 1, N
56 II = I
57 IF (AND(M(I),KO) .LE. 0) GO TO 75
58 KD = KO - M(I)
59 CONTINUE
60 KD = KO + M(II)
61 CONTINUE
62 DO 100 K=1,LX
63 X(K)=X(K)*FLXI
64 Y(K)=Y(K)*FLXI
65 CONTINUE
66 RETURN
67 END

```

```

1  SUBROUTINE INITWF(IFLGTR,PULSEW,NUMPLS,TAU0,TAUMAX,PLOTX3,
2  $PLOTY3)
3  DIMENSION PLOTX3(300),PLOTY3(300)
4  GO TO(10,20,30)IFLGTR
5  10 TW = PULSEW*1.E-6
6  TD = PULSEW*1.E-6
7  NUMPTS = 0
8  T = -TW/2.
9  NMAX = 4*NUMPLS
10 DO 1 NN = 1,NMAX
11 IF(NN .GE. 5)GO TO 2
12 IF(NN .EQ. 1)GO TO 3
13 IF(NN .EQ. 2)GO TO 4
14 IF(NN .EQ. 3)GO TO 5
15 GO TO 6
16 3 NUMPTS = NUMPTS+1
17 PLOTX3(NUMPTS) = T
18 PLOTY3(NUMPTS) = 0.
19 GO TO 1
20 4 NUMPTS = NUMPTS+1
21 PLOTX3(NUMPTS) = T*.999
22 PLOTY3(NUMPTS) = 1.
23 GO TO 1
24 5 T = T+TW
25 NUMPTS = NUMPTS+1
26 PLOTX3(NUMPTS) = T*.999
27 PLOTY3(NUMPTS) = 1.
28 GO TO 1
29 6 NUMPTS = NUMPTS+1
30 PLOTX3(NUMPTS) = T
31 PLOTY3(NUMPTS) = 0.
32 GO TO 1
33 2 IF(MOD(NN,4) .EQ. 1)GO TO 7
34 IF(MOD(NN,4) .EQ. 2)GO TO 8
35 IF(MOD(NN,4) .EQ. 3)GO TO 9
36 GO TO 1
37 7 T = T+TD
38 NUMPTS = NUMPTS+1
39 PLOTX3(NUMPTS) = T
40 PLOTY3(NUMPTS) = 0.
41 GO TO 1
42 8 NUMPTS = NUMPTS+1
43 PLOTX3(NUMPTS) = T*1.001
44 PLOTY3(NUMPTS) = 1.
45 GO TO 1
46 9 T = T+TW
47 NUMPTS = NUMPTS+1
48 PLOTX3(NUMPTS) = T*.999
49 PLOTY3(NUMPTS) = 1.
50 GO TO 1
51 11 NUMPTS = NUMPTS+1
52 PLOTX3(NUMPTS) = T
53 PLOTY3(NUMPTS) = 0.
54 1 CONTINUE

```

```

55 GO TO 30
56 TW = PULSEW*1.E-6
57 TD = PULSED*1.E-6
58 NUMPTS = 0
59 DELTAU = (TAUMAX-TAU0)/200.
60 TAU = TAU0
61 DO 21 NN = 1,201
62 SUM = 0.
63 DO 22 JJ = 1,NUMPTS
64 SUM = SUM+EXP(-((TAU-(JJ-1)*TD)/TW)**2)
65 NUMPTS = NUMPTS+1
66 PLOTX3(NUMPTS) = TAU
67 PLOTY3(NUMPTS) = SUM
68 TAU = TAU+DELTAU
69 RETURN
70 END
20 TW = PULSEW*1.E-6
TD = PULSED*1.E-6
NUMPTS = 0
DELT AU = (TAUMAX-TAU0)/200.
TAU = TAU0
DO 21 NN = 1,201
SUM = 0.
DO 22 JJ = 1,NUMPTS
SUM = SUM+EXP(-((TAU-(JJ-1)*TD)/TW)**2)
NUMPTS = NUMPTS+1
PLOTX3(NUMPTS) = TAU
PLOTY3(NUMPTS) = SUM
21 TAU = TAU+DELTAU
30 RETURN
END

```

```

1  SUBROUTINE FILONIN,X,Y,TAU,FL,SUM,SUMP)
2  COMPLEX IM,SUM,SUMP,SUM1,SUM2,SUM3,SUM4,G,H
3  DIMENSION X(1),Y(1)
4  DATA IM/(0.,1.),/
5  DATA TWOP1/6.2831853/
6  NP1 = 2*N
7  NP1 = NP+1
8  SUM1 = (0.,0.)
9  SUM2 = (0.,0.)
10 SUM3 = (0.,0.)
11 SUM4 = (0.,0.)
12 DELF = (FU-FL)/NP
13 F = FL
14 DO 1 L=1,NP1
15 IF (MOD(L,2) .EQ. 1) THEN
16 G = X(L)+IM*Y(L)
17 H = CEXP(TWOP1*IM*F+TAU)
18 SUM1 = SUM1+G*H
19 IF (MOD(L,4) .EQ. 1) THEN
20 SUM3 = SUM3+G*H
21 ELSE
22 IF (MOD(L,4) .EQ. 3) THEN
23 SUM4 = SUM4+G*H
24 ELSE
25 GO TO 2
26 END IF
27 2 CONTINUE
28 END IF
29 ELSE
30 SUM2 = SUM2+(X(L)+IM*Y(L))*CEXP(TWOP1*IM*F+TAU)
31 END IF
32 F = F+DELF
33 1 CONTINUE
34 PHI1 = TWOP1*TAU*DELF
35 PHI2 = 2.*PHI1
36 C1 = COS(PHI1)
37 C2 = COS(PHI2)
38 S1 = SIN(PHI1)
39 S2 = SIN(PHI2)
40 IF (ABS(PHI1) .LT. 1.D-5) THEN
41 BETA1 = 2./3.
42 BETA2 = BETA1
43 GAMMA1 = 4./3.
44 GAMMA2 = GAMMA1
45 ELSE
46 BETA1 = 2.*(1.+C1**2)-2.*S1*C1/PHI1/PHI1**2
47 BETA2 = 2.*(1.+C2**2)-2.*S2*C2/PHI2/PHI2**2
48 GAMMA1 = 4.*(S1/PHI1-C1)/PHI1**2
49 GAMMA2 = 4.*(S2/PHI2-C2)/PHI2**2
50 END IF
51 SUM = (BETA1*SUM1+GAMMA1*SUM2)*DELF
52 SUMP = (BETA2*SUM3+GAMMA2*SUM4)*2.*DELF
53 RETURN
54 END

```

```

1  SUBROUTINE WOPLOT(RHO)
2  C.. WAVEFORM OUTPUT PLOTS
3  REAL INCL
4  COMMON/FOUR/NFFT, FREQ0, FREQ1, INTPRT, TAUMAX, FREQ0, PULSEW.
5  $ RHO, XMIN, DELRHO, RHO, RHO, TALT, RALT, INCL, THETA, ICOMP,
6  $ IFLGTR, INFLG, NPRNT, TAUD, NUMTAU, CHIPER, NUMPLS, PULSED,
7  $ IFLGTR, IFLGTR
8  COMMON/SEVEN/XMIN, XMAX, XTIC, SCALEX, XLNG, YLNG
9  C
10 XMIN=TAUD*1000.0
11 XMAX=TAUMAX*1000.
12 XTIC = (XMAX-XMIN)/20.0
13 SCALEX=(XMAX-XMIN)/XLNG
14 IF(IFLGTR .EQ. 1 .OR. IFLGTR .EQ. 2) CALL PLOT12(RHO)
15 IF(IFLGTR .EQ. 3) CALL PLOT13(RHO)
16 IF(IFLGTR .EQ. 4) CALL PLOT14(RHO)
17 C
18 RETURN
19 END

```



```

1  SUBROUTINE PLOT12(RHO)
2  PARAMETER NMAX=2049
3  LOGICAL UP(NMAX)
4  REAL INCL
5  CHARACTER*40 PLTLBL
6  CHARACTER*50 LABEL,LABELR,LABELC
7  COMMON/FOUF/NFFT,FREQ,FREQ0,INTPR,TAUMAX,FREQ0,PULSEW,
8  PHUMIN,DELPHD,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,
9  $      IF1,STR,IN1,FLG,NPRNT,TAU0,NUMIAU,CHIPFR,NUMPLS,PULSED,
10 $      IPLDT,IPLDTI
11  COMMON/STAX/PLDTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMPTS
12  COMMON/SEVEN/YMIN,XMAX,XTIC,SCALEY,XLNG,YLNG
13  COMMON/EIGHT/LABEL,LABELR,LABELC
14  COMMON, TEN/XL,YL
15  COMMON/CDM11/PLOTX3(300),PLOTY3(300)
16
17  C
18  DO 142 K=1,NUMPTS
19  UP(K)=.FALSE.
20  CONTINUE
21  DO 200 N=1,2
22  CALL PLOT(1.,3.,-3)
23  XL=0.2
24  YL=0.5*(YLANG-1.5)
25  IF(LU.EQ.1) THEN
26  YMAX=A35(PLOTY1(1))
27  DO 141 K=2,NUMPTS
28  YK=A35(PLOTY1(K))
29  IF(YMAX.LT. YK) YMAX=YK
30  CONTINUE
31  YMIN = 0.
32  SCALEY = YMAX/YLNG
33  CALL BORDER(XLNG,XMIN,XMAX,XTIC.1,YLNG+YLNG/10.0,0.,1.1,.1,1)
34  CALL CURVE(PLOTX,PLOTY1,UP,NUMPTS,XMIN,YMIN,SCALEX,SCALEY,1)
35  ENCODE(40,90,PLTLBL) 20.0*LOG10(YMAX)
36  FORMAT('SIGNAL MAX=',F7.2,' DB/MICRO-V/M/KW')
37  CALL SYMBOL(0.5,6.2,.1,PLTLBL,0.,.40)
38  IF(1,FLG1.EQ.1) THEN
39  NPOINT = NUMPLS*4
40  ELSE
41  NPOINT = 201
42  ENDF
43  DO 145 K=1,NPOINT
44  PLOTX3(K) = PLOTX3(K)*1000.0
45  CONTINUE
46  YMAX = PLOTY3(1)
47  DO 148 K=2,NPOINT
48  IF(YMAX.LT. PLOTY3(K)) YMAX=PLOTY3(K)
49  CONTINUE
50  SCALEY = YMAX/YLNG
51  CALL CURVE(PLOTX3,PLOTY3,UP,NPOINT, XMIN,YMIN,SCALEX,SCALEY,4)
52  CALL SYMBCL(XL,YL,.1,' ENVELOPE ',90.0,15)
53  XL=5.2
54  YL=2.6
55  CALL SYMBOL(XL,YL,.1,'ENVELOPE(DB)',90.,12)

```

```

55 XL=5.3
56 YL=0.6
57 X1 = 0.1
58 DO I=3 K=1,10
59 X2=20.0*LOG10(X1)
60 CALL NUMBER(XL,YL,.1,X2,0.,2)
61 X1=X1+0.1
62 YL=YL+0.6
63 CONTINUE
64 ELSE
65 YMIN=PLOT2(1)
66 YMAX=PLOT2(1)
67 DO I=50 K=2,NUMPTS
68 IF(YMIN .GT. PLOT2(K)) YMIN=PLOT2(K)
69 IF(YMAX .LT. PLOT2(K)) YMAX=PLOT2(K)
70 CONTINUE
71 SCALEY=(YMAX-YMIN)/YLANG
72 CALL BORDER(XLANG,XMIN,XMAX,XTIC,1,YLANG,-1.0,1.0,.2,1)
73 CALL CURVE(PLOTX,PLOT2,UP,NUMPTS,XMIN,YMIN,SCALEX,SCALEY,1)
74 CALL SYMBOL(XL,YL,.1,'WAVEFORM OUTPUT',90.0,15)
75 ERDIT
76 XL=.5*(XLANG-1.8)
77 YL=-.2
78 CALL SYMBOL(XL,YL,.1,'TAU (MILLISECONDS)',0.,18)
79 XL=0.
80 YL=YL-.2
81 IF(IFLGTR .EQ. 1) THEN
82 CALL SYMBOL(XL,YL,.1,'SQUARE WAVE',0.,11)
83 ELSE
84 CALL SYMBOL(XL,YL,.1,'GAUSSIAN',0.,8)
85 ENDIF
86 YL=YL-.2
87 CALL SYMBOL(XL,YL,.1,LABELT,0.,50)
88 YL=YL-.2
89 CALL SYMBOL(XL,YL,.1,LABELR,0.,50)
90 YL=YL-.2
91 CALL SYMBOL(XL,YL,.1,LABELC,0.,50)
92 CALL PLLABL(RHG)
93 XL=0.
94 YL=YL-.2
95 ENCODE(40,901,PLTLBL) NUMPLS
96 FORMAT('NUMBER OF PULSES = ',I2)
97 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
98 YL=YL-.2
99 IF(IFLGTR .EQ. 1) THEN
100 ENCODE(40,903,PLTLBL) PULSEW
101 FORMAT('PULSE WIDTH = ',F6.1,' MICRO-SEC')
102 ELSE
103 ENCODE(40,906,PLTLBL) PULSEW
104 FORMAT('1/E HALF WIDTH = ',F6.1,' MICRO-SEC')
105 ENDIF
106 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
107 YL=YL-.2
108 ENCODE(40,910,PLTLBL) PULSED
109 FORMAT('PULSE DELAY = ',F6.1,' MICRO-SEC')
110 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
111 CALL PLOT(0.,0.,-4)

```

AD-A133 876

ELF/VLF (EXTREMELY LLW FREQUENCY/VERY LOW FREQUENCY)  
LONG PATH PULSE PROG. (U) NAVAL OCEAN SYSTEMS CENTER  
SAN DIEGO CA R A PAPPERT ET AL. AUG 83 NOSC/TR-891


2/2

UNCLASSIFIED

F/G 20/14.

NL

END



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

112 CONTINUE  
113 C  
114 RETURN  
115 END

```

1 SUBROUTINE PLOT3(RHC)
2 PARAMETER NMAX=2049
3 LOGICAL UP(NMAX)
4 REAL INCL
5 CHARACTER*40 PLIUBL
6 CHARACTER*50 LABEL,LABELR,LABELC
7 COMMON FOUR/NFFT,FREQ,FREQ0,INTPRT,FAUMAX,FREQ0,PULSEW,
8 $ RHCIN,DELTHO,RHCMA,TALT,TAULT,INCL,THETA,ICOMP,
9 $ IFLAG,INTFLG,NPRNT,TAUG,NUMTAU,CHIPFR,NUMPLS,PULSED,
10 $ IPRINT,IPLOTT
11
12 COMMON/SEVEN/PLTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMPTS
13 COMMON/EIGHT/XMIN,XMAX,XTIC,SCALEX,XLNG,YLNG
14 COMMON/TEN/XL,YL
15
16 DO 200 J=1,2
17 CALL PLOT(1,3,-3)
18 XL=0.2
19 YL=0.5*(YLNG-2.7)
20 IF(U .EQ. 1) THEN
21 YMAX=PLOTY1(1)
22 DO 140 K=2,NUMPTS
23 IF(YMAX .LT. PLOTY1(K)) YMAX=PLOTY1(K)
24 CONTINUE
25 IF(YMAX .GE. 0.0) THEN
26 YMAX=INT(YMAX/10.0+0.99)+10.0
27 ELSE
28 YMAX=INT(YMAX/10.0)*10.0
29 ENDIF
30 YMIN=YMAX-50.0
31 SCALEY=10.0
32 DO 142 K=1,NUMPTS
33 UP(K)=.FALSE.
34 IF(PLOT1(K) .GE. YMIN .AND. PLOTY1(K) .LE. YMAX) GO TO 142
35 UP(K)=.TRUE.
36 CONTINUE
37 CALL SCRIBER(XLNG,XMIN,XMAX,XTIC,1,YLNG,YMIN,YMAX,10.0,1)
38 CALL CURVE(PLOTX,PLOTY1,UP,NUMPTS,XMIN,YMIN,SCALEX,SCALEY,1)
39 CALL SYMBOL(XL,YL,1,'CORRELATION DB/MICRO-V/M/KW',90.0,27)
40 ELSE
41 DO 145 K=1,NUMPTS
42 UP(K)=.FALSE.
43 CONTINUE
44 YMIN=PLOTY2(1)
45 YMAX=PLOTY2(1)
46 DO 150 K=2,NUMPTS
47 IF(YMIN .GT. PLOTY2(K))YMIN=PLOTY2(K)
48 IF(YMAX .LT. PLOTY2(K))YMAX=PLOTY2(K)
49 CONTINUE
50 IF(YMAX .GT. 0.0) THEN
51 YMAX=INT(YMAX/10.0+0.99)+10.0
52 ELSE
53 YMAX=INT(YMAX/10.0)+10.0
54 ENDIF

```

```

55 IF (YMIN .GE. 0.0) THEN
56 YMIN=INT(YMIN/10.0)+10.0
57 ELSE
58 YMIN=INT(YMIN/10.0-0.99)+10.0
59 ENDF
60 YTIC=(YMAX-YMIN)/10.0
61 SCALEY=(YMAX-YMIN)/YLONG
62 CALL SORDER(XLNG,XMIN,XMAX,ATIC,1,YLNG,YMIN,YMAX,YTIC,1)
63 CALL CURVE(PLOTX,PLOTY2,UP,NUMPTS,XMIN,YMIN,SCALEX,SCALEY,1)
64 CALL SYMBOL(XL,YL,1,'CORRELATION PHASE-RAD',.90,0.27)
65 ENDF
66 XL=.5*(XLNG-1.8)
67 YL=.2
68 CALL SYMBOL(XL,YL,1,'TAU (MILLISECONDS)',0.,.18)
69 XL=0.
70 YL=YL-.2
71 IF (J.EQ. 1) THEN
72 CALL SYMBOL(XL,YL,1,'CORRELATOR OUTPUT FOR MSK FORMAT',0.,.32)
73 ELSE
74 CALL SYMBOL(XL,YL,1,'CORRELATOR PHASE',0.,.16)
75 ENDF
76 YL=YL-.2
77 CALL SYMBOL(XL,YL,1,LABELC,0.,.50)
78 YL=YL-.2
79 CALL SYMBOL(XL,YL,1,LABELT,0.,.50)
80 ENCODE(40,915,PLTLBL) CHIPFR
81 FORMAT('CHIP FREQ =',F5.2,' KHZ')
82 YL=YL-.2
83 CALL SYMBOL(XL,YL,1,PLTLBL,0.,.40)
84 YL=YL-.2
85 CALL SYMBOL(XL,YL,1,LABELR,0.,.50)
86 CALL PLLABL(RHO)
87 CALL PLOT(0.,0.,-4)
88 CONTINUE
89 RETURN
90 END
91

```

915

200  
C

```

1  SUBROUTINE PLOT4(RHO)
2  PARAMETER NMAX=2049
3  LOGICAL UP,NMAX)
4  CHARACTER*50 LABELT,LABELR,LABELC
5  COMMON/STK/PLOTX(NMAX),PLOTY1(NMAX),PLOTY2(NMAX),NUMPTS
6  COMMON/SEVEN/XMIN,XMAX,XTIC,SCALEX,XLNG,YLNG
7  COMMON/EIGHT/LABELT,LABELR,LABELC
8
9  DO 142 K=1,NUMPTS
10 UP(K)=.FALSE.
11 CONTINUE
12 CALL PLOT(1.,3.,-3)
13 YMAX=500.0
14 YMIN=-2000.0
15 YTIC=(YMAX-YMIN)/10.0
16 SCALEY=(YMAX-YMIN)/YLNG
17 CALL BORDER(XLNG,XMIN,XMAX,XTIC,1,YLNG,YMIN,YMAX,YTIC,1)
18 CALL CURVE(PLOTX,PLOTY2,UP,NUMPTS,XMIN,YMIN,SCALEX,SCALEY,1)
19 XL=-0.2
20 YL=0.5*(YLNG-2.8)
21 CALL SYMBOL(XL,YL,1,'WAVEFORM OUTPUT MICRO-VOLT/M',90.,28)
22 XL=.5*(XLNG-1.8)
23 YL=-.2
24 CALL SYMBOL(XL,YL,1,'1AU (MILLISECONDS)',0.,18)
25 XL=0.
26 YL=-.4
27 CALL SYMBOL(XL,YL,1,'SLOW WAVE TAIL CALCULATION',0.,26)
28 YL=-.6
29 CALL SYMBOL(XL,YL,1,LABELT,C.,50)
30 YL=-.8
31 CALL SYMHOL(XL,YL,1,LABELR,0.,50)
32 YL=-1.0
33 CALL SYMBOL(XL,YL,1,LABELC,0.,50)
34 CALL PLOT(0.,0.,-4)
35
36 RETURN
37 END

```



```

1 SUBROUTINE PLLABEL(RHO)
2 C..PUT LABELS ON PLOTS
3 C
4 REAL INCL
5 CHARACTER*1 LABEL(3)
6 CHARACTER*40 PLTLBL
7 COMMON/ECUR/NFT,FREQ,FREQI,INTPT,TAUMAX,FREQO,PULSEM,
8 $ RHOIN,DELPHO,RHOMAX,TALT,RALT,INCL,THETA,ICOMP,
9 $ IFLGTR,INTFLG,NPRINT,TAUO,NUMTAU,CHIFFR,NUMPLS,PULSED,
10 $ IPILOT,IPILOT1
11 COMMON/TEN/XL,YL
12 DATA LABEL/'Z','Y','X'/
13
14 C
15 XL=0.
16 YL=YL-.2
17 CALL SYMBOL(XL,YL,.1,LABEL(ICOMP),0.,1)
18 XL=XL+.2
19 CALL SYMBOL(XL,YL,.1,'COMPONENT OF ELECTRIC FIELD',0.,27)
20 ENCODE(40,900,PLTLBL) IN'L,THEIA
21 FORMAT('INCL =',F6.2,' DEG' THETA =',F6.2,' DEG')
22 XL=0.
23 YL=YL-.2
24 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
25 ENCODE(40,910,PLTLBL) TALT,RALT
26 FORMAT('TALT =',F6.2,' KM' RALT =',F6.2,' KM')
27 YL=YL-.2
28 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
29 ENCODE(40,920,PLTLBL) RHO
30 FORMAT('RANGE =',F7.2,' KM')
31 YL=YL-.2
32 CALL SYMBOL(XL,YL,.1,PLTLBL,0.,40)
33 C
34 RETURN
35 END

```

```

1  SUBROUTINE SPLINE (X, Y, B, C, D, N)
2  DIMENSION X(1), Y(1), B(1), C(1), D(1)
3
4  C SPLINE DETERMINES THE COEFFICIENTS B, C, D OF A CUBIC SPLINE
5  INTERPOLATING THE GIVEN CURVE X(I), Y(I), I=1,...,N.
6  IF X(I) .LE. XX .LE. X(I+1) AND H = XX - X(I),
7  THEN THE INTERPOLATED VALUE AT XX IS
8  F(XX) = Y(I) + B(I)*H + C(I)*H**2 + D(I)*H**3.
9  THE INTERPOLATED VALUE CAN BE EVALUATED WITH THE FUNCTION SP EVAL.
10 B, C, D, MUST HAVE LENGTH AT LEAST N.
11
12 IF (N.GT.2) GO TO 050
13 C(1) = 0.0
14 D(1) = 0.0
15 B(1) = (Y(2) - Y(1)) / (X(2) - X(1))
16 RETURN
17 050 NN = N - 1
18 TB = 0.
19 DO 100 I = 1, NN
20 IF (X(I+1).LE.X(I)) GO TO 800
21 D(I) = X(I+1) - X(I)
22 TA = (Y(I+1) - Y(I)) / D(I)
23 C(I) = TA - TB
24 TB = TA
25 100 CONTINUE
26 C(1) = 0.
27 C(N) = 0.
28 TA = 0.
29 TB = 0.
30 DO 200 J = 2, NN
31 C(J) = C(I) - TA * C(I-1)
32 E(I) = 2.0 * (D(I) + D(I-1)) - TA * TB
33 TB = D(I)
34 TA = TB / B(I)
35 200 CONTINUE
36 C(NN) = C(NN) / B(NN)
37 IF (N.NE.3) GO TO 350
38 DO 300 I = 3, NN
39 J = NN + 2 - I
40 C(J) = (C(J) - D(J) * C(J+1)) / B(J)
41 DO 400 I = 1, NN
42 B(I) = (Y(I+1) - Y(I)) / D(I)
43 S = (C(I) + C(I) + C(I+1)) * D(I)
44 D(I) = (C(I+1) - C(I)) / D(I)
45 C(I) = 3.0 * C(I)
46 400 CONTINUE
47 RETURN
48
49 PRINT 900
50 PRINT 901, I, X(I), X(I+1)
51
52 900 FORMAT (1X, ' I =', I5, ' X(I) =', 1PE12.5, ' X(I+1) =', 1PE12.5 /)
53 901 FORMAT (1X, ' ERROR IN SPLINE ', /)
54 $ ' X-COORDINATE VALUES ARE NOT IN INCREASING ORDER' )
55 END

```

```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38

C
C
30
35
40
45
50
55
60
65
99

SUBROUTINE FUNCVF(MD,LF)
INCLUDE SFECANS.COMMONSPECS,LIST
GO TO (30,40,50,60),LF
DO 35 I=1,NF
IF(MODE(MD,I).EQ.0) GO TO 35
JJ = I-KK(MD)+1
YY(JJ) = XTIR(MD,I)
XX(JJ) = FREQ(I)
LM = MODE(MD,I)
CONTINUE
GO TO 99
DO 45 I=1,NF
IF(MODE(MD,I).EQ.0) GO TO 45
JJ = I-KK(MD)+1
YY(JJ) = XTIR(MD,I)
XX(JJ) = FREQ(I)
LM = MODE(MD,I)
CONTINUE
GO TO 99
DO 55 I=1,NF
IF(MODE(MD,I).EQ.0) GO TO 55
JJ = I-KK(MD)+1
YY(JJ) = STPR(MD,I)
XX(JJ) = FREQ(I)
LM = MODE(MD,I)
CONTINUE
GO TO 99
DO 65 I=1,NF
IF(MODE(MD,I).EQ.0) GO TO 65
JJ = I-KK(MD)+1
YY(JJ) = STPI(MD,I)
XX(JJ) = FREQ(I)
LM = MODE(MD,I)
CONTINUE
RETURN
END

```

SURROUTINE MOHNKL (Z, H1, H2, H1PRME, H2PRFE, THETA, IDBG)

IMPLICIT COMPLEX\*16 (A-H, J-Z)

COMPLEX\*16 I, PPOWER, MTERM

REAL\*8 A, C, D, CAP, PART1, PART2, ZMAG

CHARACTER\*4 IDBG

DIMENSION A(30), B(30), C(30), S(30), CAP(30), PART1(2), PART2(2)  
EQUIVALENCE (PART1, TERMA), (PART2, UMA4)

DATA A

\$ 9.30436718339270348130-01, 3.1014557230974314911D+01,  
\$ 2.0676271457316299870-02, 5.743435524254502744D+02,  
\$ 8.702176513992515734D-02, 8.217787192286439737D+02,  
\$ 5.416359374573295512D-02, 2.579954163830202211D+02,  
\$ 9.345841507631874931D+01, 2.6575351879714055662D+01,  
\$ 6.121009330591072940+00, 1.1592603844803233472D+00,  
\$ 1.8401275944122116518D-01, 2.4833030953741048003D-02,  
\$ 2.0812050077902183003-03, 2.913341425956786138D-04,  
\$ 2.582749469312753045D-05, 2.025685879853140063D-06,  
\$ 1.415573639607987074D-07, 8.8696050013000443124D-09,  
\$ 5.01102203352793392D-10, 2.5659074934115635526D-11,  
\$ 1.19619054259122817D-12, 5.0083092481207283185D-14,  
\$ 1.3943329351771693D-15, 7.1896100363126365797D-17,  
\$ 2.390809552516785112D-18, 7.3893010291224645255D-20,  
\$ 2.1191208514307528762D-21, 5.6632858632471311093D-23/  
\$ 6.7329872513427589156D-01, 1.130497875240459303D+01,  
\$ 5.383323215137609799D+01, 1.106294047875024375D+02,  
\$ 1.5337103177854158415+02, 1.278091931487784509D+02,  
\$ 7.47422182151640511D+01, 3.235030021524117060D+01,  
\$ 1.078531267384103903D+01, 2.8532573710320229800D+00,  
\$ 6.1350370335947223355D-01, 1.093767816982125186D-01,  
\$ 1.6422935951656563145D-02, 2.105505122395713911D-03,  
\$ 2.3316778753072130571D-04, 2.252228690934256561D-05,  
\$ 9.12680860374314044D-11, 1.443698947587961883D-07,  
\$ 7.28612416647703710D-09, 5.8854279743918795891D-10,  
\$ 3.216080860374314044D-11, 1.5852782945255116351D-12,  
\$ 7.215185022316503778D-14, 2.98765574476397671D-15,  
\$ 1.130055306117350779D-16, 3.9889659963766691603D-18,  
\$ 1.2949337099535513D-19, 3.892519931054626822D-21,  
\$ 1.0920225031314870630D-22, 2.8527230291565745912D-24/  
\$ 4.6521835453461472410D-01, 6.202911446124032322D+00,  
\$ 2.5815164334145102512D+01, 5.2213059311404570392D+01,  
\$ 6.2158103442158299612D+01, 4.8751689366390821827D+01,  
\$ 2.798171370217123914D+01, 1.121501940796740090D+01,  
\$ 3.5935250259449022D+00, 9.18150845905160914D-01,  
\$ 1.91231265139253351D-01, 3.310720893937809740D-02,  
\$ 4.84241007345043140-04, 6.0503360204245458321D-04,  
\$ 6.55501820323778400-05, 6.19450974395000861D-06,  
\$ 5.165196379625567119D-07, 3.82204861840015928D-08,  
\$ 2.527810663735126273D-09, 1.503206103698380141D-10,  
\$ 8.08229604284409153D-12, 3.947396143710105471D-13,  
\$ 1.759081906016512975D-14, 7.191421378226377892D-16,  
\$ 2.695729723672589641D-17, 9.3359572349515401665D-19,  
\$ 2.992019106395981315D-20, 8.9015075760511620701D-22,  
\$ 2.464128595125033375D-23, 6.365020935361057409D-25/  
\$ 6.782987251442758845D-01, 4.5219915009618392131D+01,  
\$ 3.7683262598015325775D+02, 1.1962940478735024344D+03.

DATA B

\$ 1.078531267384103903D+01, 2.8532573710320229800D+00,  
\$ 6.1350370335947223355D-01, 1.093767816982125186D-01,  
\$ 1.6422935951656563145D-02, 2.105505122395713911D-03,  
\$ 2.3316778753072130571D-04, 2.252228690934256561D-05,  
\$ 9.12680860374314044D-11, 1.443698947587961883D-07,  
\$ 7.28612416647703710D-09, 5.8854279743918795891D-10,  
\$ 3.216080860374314044D-11, 1.5852782945255116351D-12,  
\$ 7.215185022316503778D-14, 2.98765574476397671D-15,  
\$ 1.130055306117350779D-16, 3.9889659963766691603D-18,  
\$ 1.2949337099535513D-19, 3.892519931054626822D-21,  
\$ 1.0920225031314870630D-22, 2.8527230291565745912D-24/  
\$ 4.6521835453461472410D-01, 6.202911446124032322D+00,  
\$ 2.5815164334145102512D+01, 5.2213059311404570392D+01,  
\$ 6.2158103442158299612D+01, 4.8751689366390821827D+01,  
\$ 2.798171370217123914D+01, 1.121501940796740090D+01,  
\$ 3.5935250259449022D+00, 9.18150845905160914D-01,  
\$ 1.91231265139253351D-01, 3.310720893937809740D-02,  
\$ 4.84241007345043140-04, 6.0503360204245458321D-04,  
\$ 6.55501820323778400-05, 6.19450974395000861D-06,  
\$ 5.165196379625567119D-07, 3.82204861840015928D-08,  
\$ 2.527810663735126273D-09, 1.503206103698380141D-10,  
\$ 8.08229604284409153D-12, 3.947396143710105471D-13,  
\$ 1.759081906016512975D-14, 7.191421378226377892D-16,  
\$ 2.695729723672589641D-17, 9.3359572349515401665D-19,  
\$ 2.992019106395981315D-20, 8.9015075760511620701D-22,  
\$ 2.464128595125033375D-23, 6.365020935361057409D-25/  
\$ 6.782987251442758845D-01, 4.5219915009618392131D+01,  
\$ 3.7683262598015325775D+02, 1.1962940478735024344D+03.

DATA C

\$ 1.078531267384103903D+01, 2.8532573710320229800D+00,  
\$ 6.1350370335947223355D-01, 1.093767816982125186D-01,  
\$ 1.6422935951656563145D-02, 2.105505122395713911D-03,  
\$ 2.3316778753072130571D-04, 2.252228690934256561D-05,  
\$ 9.12680860374314044D-11, 1.443698947587961883D-07,  
\$ 7.28612416647703710D-09, 5.8854279743918795891D-10,  
\$ 3.216080860374314044D-11, 1.5852782945255116351D-12,  
\$ 7.215185022316503778D-14, 2.98765574476397671D-15,  
\$ 1.130055306117350779D-16, 3.9889659963766691603D-18,  
\$ 1.2949337099535513D-19, 3.892519931054626822D-21,  
\$ 1.0920225031314870630D-22, 2.8527230291565745912D-24/  
\$ 4.6521835453461472410D-01, 6.202911446124032322D+00,  
\$ 2.5815164334145102512D+01, 5.2213059311404570392D+01,  
\$ 6.2158103442158299612D+01, 4.8751689366390821827D+01,  
\$ 2.798171370217123914D+01, 1.121501940796740090D+01,  
\$ 3.5935250259449022D+00, 9.18150845905160914D-01,  
\$ 1.91231265139253351D-01, 3.310720893937809740D-02,  
\$ 4.84241007345043140-04, 6.0503360204245458321D-04,  
\$ 6.55501820323778400-05, 6.19450974395000861D-06,  
\$ 5.165196379625567119D-07, 3.82204861840015928D-08,  
\$ 2.527810663735126273D-09, 1.503206103698380141D-10,  
\$ 8.08229604284409153D-12, 3.947396143710105471D-13,  
\$ 1.759081906016512975D-14, 7.191421378226377892D-16,  
\$ 2.695729723672589641D-17, 9.3359572349515401665D-19,  
\$ 2.992019106395981315D-20, 8.9015075760511620701D-22,  
\$ 2.464128595125033375D-23, 6.365020935361057409D-25/  
\$ 6.782987251442758845D-01, 4.5219915009618392131D+01,  
\$ 3.7683262598015325775D+02, 1.1962940478735024344D+03.

DATA D

\$ 1.078531267384103903D+01, 2.8532573710320229800D+00,  
\$ 6.1350370335947223355D-01, 1.093767816982125186D-01,  
\$ 1.6422935951656563145D-02, 2.105505122395713911D-03,  
\$ 2.3316778753072130571D-04, 2.252228690934256561D-05,  
\$ 9.12680860374314044D-11, 1.443698947587961883D-07,  
\$ 7.28612416647703710D-09, 5.8854279743918795891D-10,  
\$ 3.216080860374314044D-11, 1.5852782945255116351D-12,  
\$ 7.215185022316503778D-14, 2.98765574476397671D-15,  
\$ 1.130055306117350779D-16, 3.9889659963766691603D-18,  
\$ 1.2949337099535513D-19, 3.892519931054626822D-21,  
\$ 1.0920225031314870630D-22, 2.8527230291565745912D-24/  
\$ 4.6521835453461472410D-01, 6.202911446124032322D+00,  
\$ 2.5815164334145102512D+01, 5.2213059311404570392D+01,  
\$ 6.2158103442158299612D+01, 4.8751689366390821827D+01,  
\$ 2.798171370217123914D+01, 1.121501940796740090D+01,  
\$ 3.5935250259449022D+00, 9.18150845905160914D-01,  
\$ 1.91231265139253351D-01, 3.310720893937809740D-02,  
\$ 4.84241007345043140-04, 6.0503360204245458321D-04,  
\$ 6.55501820323778400-05, 6.19450974395000861D-06,  
\$ 5.165196379625567119D-07, 3.82204861840015928D-08,  
\$ 2.527810663735126273D-09, 1.503206103698380141D-10,  
\$ 8.08229604284409153D-12, 3.947396143710105471D-13,  
\$ 1.759081906016512975D-14, 7.191421378226377892D-16,  
\$ 2.695729723672589641D-17, 9.3359572349515401665D-19,  
\$ 2.992019106395981315D-20, 8.9015075760511620701D-22,  
\$ 2.464128595125033375D-23, 6.365020935361057409D-25/  
\$ 6.782987251442758845D-01, 4.5219915009618392131D+01,  
\$ 3.7683262598015325775D+02, 1.1962940478735024344D+03.

```

55 $ 1.9938231131255040548D+03, 2.0149470903820554375D+03,
56 $ 1.426102146096636990D+03, 7.1183664967350857463D+02,
57 $ 2.6953262181602597432D+02, 7.9921206472896585111D+01,
58 $ 1.9021715826680139234D+01, 3.7188105243322256682D+00,
59 $ 6.0764377832310289572D-01, 2.422020465838535541D-02,
60 $ 1.0028214868551016148D-02, 1.0363012724032058021D-03,
61 $ 9.3867869720504235432D-05, 7.51242452274574017969D-06,
62 $ 5.3507368428183773360D-07, 3.41354522514729016285D-08,
63 $ 1.961803324742931935D-09, 1.020978056963274472D-10,
64 $ 4.834176372350352579D-12, 2.031359021133478373D-13,
65 $ 8.299013734650502939D-15, 3.0316141496462685641D-16,
66 $ 1.022817913786331174D-17, 3.1967863459247792361D-19,
67 $ 9.282190319176490153D-21, 2.510393299804300303D-22/
68 $ DATA CAP / 2.9350347222222222116D-02,
69 $ 1.0416666666666666663D-01, 8.3550347222222222116D-02,
70 $ 1.2822357355032716019D-01, 2.91849026645414046315D-01,
71 $ 8.8162726744375764874D-01, 3.3214082818627675261D+00,
72 $ 1.49357529959254540D+01, 7.892301301158651753D+01,
73 $ 4.7445153886826431987D+02, 3.207490908966619094D+03,
74 $ 2.4086549540874004905D+04, 1.983231154950979121D+05,
75 $ 1.791902007754438053D+06, 1.7444377180234121023D+07,
76 $ 1.837073796703072976D+08, 2.0679040329451551508D+09,
77 $ 2.4827519375235898472D+10, 3.1699454981734887315D+11,
78 $ 4.2771126965134715582D+12, 6.037113241139256074D+13,
79 $ 9.148694223456396792D+14, 1.4413525170009350101D+16,
80 $ 2.378844295175757942D+17, 4.1045081500946921885D+18,
81 $ 7.3900049415704853093D+19, 1.3859220004603943141D+21,
82 $ 2.703082930275751622D+22, 5.4747478619645573335D+23,
83 $ 1.149893701438633574D+25, 2.5014180692753603969D+26/
84 $ DATA ONE/(1.0,0.00)/,TWO/(2.00,0.00)/,ZERO/(0.00,0.00)/
85 $ DATA ROOT3/(1.7205080756588D0,0.00)/
86 $ DATA ALPHA/(8.5366721883851D-1,0.00)/
87 $ DATA CONST1/( 2.58819045102522D-01,-9.65925826289067D-01)/
88 $ DATA CONST2/( 2.58819045102522D-01, 9.65925826289067D-01)/
89 $ DATA CONST3/( -9.65925826289067D-01, 2.58819045102522D-01)/
90 $ DATA CONST4/( -9.65925826289067D-01,-2.58819045102522D-01)/
91 $
92 $ ZPOWER=ONE
93 $ SUM3=ZERO
94 $ SUM4=ZERO
95 $ ZMAG=COABS(Z)
96 $ IF(ZMAG.GT. 6.1D0) GO TO 70
97 $ SUM1=ZERO
98 $ SUM2=ZERO
99 $ ZTERIP=-Z**3/(200.00,0.00)
100 $ DO 50 M=1,30
101 $ SUM1=SUM1+DCPLX(A(M),0.00)*ZPOWER
102 $ SUM2=SUM2+DCPLX(B(M),0.00)*ZPOWER
103 $ SUM3=SUM3+DCPLX(C(M),0.00)*ZPOWER
104 $ TERM4=DCPLX(D(M),0.00)*ZPOWER
105 $ SUM4=SUM4+TERM4
106 $ IF(DABS(PART1(1)/PART2(1)) .LE. 1.D-17 .AND.
107 $ DABS(PART1(2)/PART2(2)) .LE. 1.D-17) GO TO 60
108 $ ZPOWER=ZPOWER*ZTERIP
109 $ GM2F=1*(Z*SUM2-TWO*SUM1)/ROOT3
110 $ GPMFP=1*(SUM4+TWO*Z*SUM3)/ROOT3
111 $ H1=Z*SUM2+GM2F

```

C

```

112 H2=H1-TWO*GM2F
113 H1PRME=SUM4+GPMFP
114 H2PRME=H1PRME-TWO*GPMFP
115 GO TO 999
116 MPOWER=ONE
117 SUM1=ONE
118 SUM2=ONE
119 RTZ=CDSQRT(Z)
120 SORTZB=RTZ*Z
121 TERM1=1/SORTZB
122 MTERM=-ZTERM
123 DM=ZERO
124 TERM3=ONE
125 DO 50 M=1,30
126 ZPOWER=ZPOWER*ZTERM
127 MPOWER=MPOWER*MTERM
128 DM=DM+ONE
129 TERM1=DCMPLX(CAP(M),0.00)*ZPOWER
130 TERM2=DCMPLX(CAP(M),0.00)*MPOWER
131 IF(CABS(TERM2/TERM3) .GE. 1.00) GO TO 81
132 SUM1=SUM1+TERM1
133 SUM2=SUM2+TERM2
134 SUM3=SUM3+DM*MTERM1
135 TERM4=DM*MTERM2
136 SUM4=SUM4+TERM4
137 IF(DABS(PART1(1)/PART2(1)) .LE. 1.0-17 .AND.
138 DABS(PART1(2)/PART2(2)) .LE. 1.0-17) GO TO 81
139 TERM2=TERM2
140 ZTERM=1-1.500,0.00)/Z
141 SUM3=SUM3+ZTERM
142 SUM1=SUM1+ZTERM
143 TERM1=(1-0.2500,0.00)-I*(SORTZB)/Z
144 TERM2=(1-0.2500,0.00)+I*(SORTZB)/Z
145 EXP1=CEXP(0.00,C.666666666666666666700)*SORTZB)
146 EXP2=CONJG(EXP1)
147 EXP3=COS(12/EXP1)
148 EXP4=COS(13/EXP1)
149 EXP5=COS(14/EXP1)
150 ZTERM=ALPHA/CDSQRT(RTZ)
151 TERM4=Z
152 IF(PART1(1) .GE. 0.00 .OR. PART1(2) .GE. 0.00) GO TO 90
153 H1=ZTERM*(EXP2+SUM2+EXP3+SUM1)
154 H1PRME=ZTERM*(EXP2+(SUM2+TERM2+SUM4)+EXP5+(SUM1+TERM1+SUM3))
155 GO TO 110
156 H1=ZTERM*EXP2+SUM2
157 H1PRME=ZTERM*EXP2+(SUM2+TERM2+SUM4)
158 IF(PART1(1) .GE. 0.00 .OR. PART1(2) .LT. 0.00) GO TO 120
159 H2=ZTERM*(EXP3+SUM1+EXP4+SUM2)
160 H2PRME=ZTERM*(EXP3+(SUM1+TERM1+SUM3)+EXP4+(SUM2+TERM2+SUM4))
161 GO TO 999
162 H2=ZTERM*EXP3+SUM1
163 H2PRME=ZTERM*EXP3+(SUM1+TERM1+SUM3)
164 C CALCULATE WROVSKIAN AS PARTIAL CHECK ON VALIDITY
165 SUM4=H1+H2PRME-H1PRME+H2
166 IF(DABS(PART2(1)) .LE. 1.0-8 .AND.
167 DABS(PART2(2))+1.45749544104046100) .LE. 1.0-8) GO TO 1000
168 PRINT 1001,SUM4,THETA,IDBS

```

```
169 1000 RETURN
170 1001 FORMAT(' ***** POSSIBLE ERROR IN MDHKKL: W = ',1P2E15.6,
171 S ' FOR THETA = ',0P2F10.4,' AT ',A4)
172 END
```

```

1  SUPROUTINE BORDER(XLNG,XMIN,XMAX,XINC,NX,YLNG,YMIN,YMAX,YINC,NY)
2  DIMENSION XINC(NX),YINC(NY)
3  LOGICAL FX,FX
4  FX=.FALSE.
5  FX=.FALSE.
6  IF(NX.EQ.1) FX=.TRUE.
7  IF(NY.EQ.1) FY=.TRUE.
8  XT=XLNG-.1
9  YT=YLNG-.1
10 XSCALE=XLNG/(XMAX-XMIN)
11 YSCALE=YLNG/(YMAX-YMIN)
12 YM=ABS(YMIN)
13 YLN=-.4
14 IF(YM.GE.10.) YLN=YLN-.1
15 IF(YM.GE.100.) YLN=YLN-.1
16 IF(YM.GE.1000.) YLN=YLN-.1
17 IF(YMIN.LT.0.) YLN=YLN-.1
18 YM=ABS(YMAX)
19 YLM=-.4
20 IF(YM.GE.10.) YLM=YLM-.1
21 IF(YM.GE.100.) YLM=YLM-.1
22 IF(YM.GE.1000.) YLM=YLM-.1
23 IF(YMAX.LT.0.) YLM=YLM-.1
24 XM=ABS(XMAX)
25 XLN=-.3
26 IF(XM.GE.10.) XLM=XLM-.1
27 IF(XM.GE.100.) XLM=XLM-.1
28 IF(XM.GE.1000.) XLM=XLM-.1
29 IF(XMAX.LT.0.) XLM=XLM-.1
30 IF(FX) DX=XINC(1)
31 IF(FY) DY=YINC(1)
32 IY=1
33 YL=0.
34 CALL NUMBER(YLN,0.,.1,YMIN,0.,1)
35 CALL PLOT(0.,0.,3)
36 IF(FY) GO TO 110
37 YP=(YINC(IY)-YMIN)*YSCALE
38 GO TO 111
39 YL=YL+DY
40 YP=YL*YSCALE
41 IF(YP.LT.0.) GO TO 99
42 IF(YP.GE.YLNG) GO TO 11
43 CALL PLOT(0.,YP,2)
44 CALL PLOT(1,YP,2)
45 CALL PLOT(0.,YP,2)
46 IF(FY) GO TO 110
47 IY=IY+1
48 IF(IY.LE.NY) GO TO 10
49 CALL PLOT(0.,YLNG,2)
50 CALL NUMBER(YLM,YLNG-.1,.1,YMAX,0.,1)
51 CALL PLOT(0.,YLNG,3)
52 IAX=1
53 XL=0.
54 IF(IX) GO TO 112

```



```

55 12 XP=(XINC(IX)-XMIN)*XSCALE
56 GO TO 120
57 XL=XL+DX
58 XP=XL*XSCALE
59 IF(XP .LT. 0.) GO TO 99
60 IF(XP .GE. XLNG) GO TO 13
61 CALL PLOT(XP, YLNG, 2)
62 CALL PLOT(XP, YT, 2)
63 CALL PLOT(XP, YLNG, 2)
64 IF(FX) GO TO 112
65 IX=IX+1
66 IF(IX .LE. NX) GO TO 12
67 CALL PLOT(XLNG, YLNG, 2)
68 IF(FY) GO TO 130
69 IY=IY-1
70 IF(IY .LE. 0) GO TO 15
71 YP=(YINC(IY)-YMIN)*YSCALE
72 GO TO 14
73 YL=YL-DY
74 YP=YL*YSCALE
75 IF(YP .LE. 0.) GO TO 15
76 CALL PLOT(XLNG, YP, 2)
77 CALL PLOT(XT, YP, 2)
78 CALL PLOT(XLNG, YP, 2)
79 IF(FY) GO TO 130
80 GO TO 113
81 CALL PLOT(XLNG, 0., 2)
82 CALL NUMBER(XLNG+XLM, -.2, .1, XMAX, 0., 1)
83 CALL PLOT(XLNG, 0., 3)
84 IF(FX) GO TO 150
85 IX=IX-1
86 IF(IX .LE. 0) GO TO 17
87 XP=(XINC(IX)-XMIN)*XSCALE
88 GO TO 16
89 XL=XL-DX
90 XP=XL*XSCALE
91 IF(XP .LE. 0.) GO TO 17
92 CALL PLOT(XP, 0., 2)
93 CALL PLOT(XP, .1, 2)
94 CALL PLOT(XP, 0., 2)
95 IF(FX) GO TO 150
96 GO TO 115
97 CALL PLOT(0., 0., 2)
98 CALL NUMBER(0., -.2, .1, XMIN, 0., 1)
99 RETURN
100 PRINT 100, XLNG, XMIN, XMAX, XINC(1), NX, YLNG, YMIN, YMAX, YINC(1), NY
101 FORMAT('0*** ERROR IN BORDER: XLNG, XMIN, XMAX, XINC(1), NX =',
102 '1P4E15.5, 15/24X, YLNG, YMIN, YMAX, YINC(1), NY =', 1P4E15.5,
103 '15/0***')
104 $ $ CALL PLOT(0., 0., 999)
105 STOP
106 END

```

```

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54

SUBROUTINE CURVE(X,Y,UP,NRPTS,XMIN,YMIN,XINC,YINC,LINE)
C X,Y,UP MUST BE DIMENSIONED AT LEAST NRPTS
C XMIN,YMIN ARE X,Y ORIGIN IN USER UNITS
C XINC,YINC ARE X,Y SCALES IN USER UNITS PER INCH
C
C LINE=1: SOLID
C 2: LONG DASH
C 3: MEDIUM DASH
C 4: SHORT DASH
C 5: DOTTED
C 6: SHORT + LONG DASH
C 7: SHORT + SHORT + LONG DASH
C
C LOGICAL UP,UP1,UP2
C DIMENSION IPEN(10),JOC(7),X(NRPTS),Y(NRPTS),UP(NRPTS)
C DATA IPEN/3,2,3,2,3,2,2,2,2,2,2/JOC/18, 61, 56, 54, 52, 11, 36/
C DATA DELR/.1/
C
C IF(NRPTS .LE. 1) GO TO 99
C
C IF(LINE) 1,2,3
C KK=MOD(LINE,7)+7
C GO TO 4
C KK=0
C GO TO 4
C KK=MOD(LINE,7)
C KK=KK+1
C JO=JOC(KK)/10
C JC=JOC(KK)-10*JO
C
C J=1
C IP=2
C IF(KK .EQ. 6) IP=3
C DR=0.
C RHO1=0.
C RHO2=DELR
C PX1=(X(1)-XMIN)/XINC
C PY1=(Y(1)-YMIN)/YINC
C UP1=UP(1)
C IF(UP1) GO TO 10
C
C GO TO FIRST POSITION WITH PEN UP
C CALL PLOT(PX1,PY1,J)
C
C DO 40 J=2,NRPTS
C PX2=(X(J)-XMIN)/XINC
C PY2=(Y(J)-YMIN)/YINC
C UP2=UP(J)
C IF(UP2) GO TO 22
C IF(UP1) GO TO 37
C IF(KK .EQ. 2) GO TO 38
C DELX=PX2-PX1
C DELY=PY2-PY1

```

```

55 RMO=SQRT(DELX**2+DELY**2)
56 RHO1=RHO1/RHO
57 IF(RHO2 .GT. RHO1) GO TO 38
58 DELX=DELX*DELR/RHO
59 DELY=DELY*DELR/RHO
60 DX 6=DELX*.1
61 DY 6=DELY*.1
62 IF(DR .EQ. 0.) GO TO 20
63 DX=DELX*DR/DELR
64 DY=DELY*DR/DELR
65 PX1=PX1+DX
66 PY1=PY1+DY
67 GO TO 21
68
69 20 IF(RHO2 .GT. RHO1) GO TO 38
70 PX1=PX1+DELX
71 PY1=PY1+DELY
72 CALL PLOT(PX1,PY1,1P)
73 IF(KK .EQ. 6) CALL PLOT(PX1+DX6,PY1+DY6,2)
74 J=J+1
75 IF=1PER(JO+MOD(J,JC))
76 RHO2=RHO2+DELR
77 GO TO 20
78 DR=0.
79 RHO1=0.
80 RHO2=DELR
81 GO TO 19
82 C PEN HAS BEEN UP. PREPARE TO LOWER PEN
83 CALL PLOT(PX2,PY2,3)
84 GO TO 39
85 CALL PLOT(PX2,PY2,1P)
86 DR=RHO2-RHO1
87 PX1=PX2
88 PY1=PY2
89 UP1=UP2
90 CONTINUE
91 RETURN
92 END

```

```

1 COMMON SPECS PROC
2 PARAMETER NRFREQ=6, NRMODE=23
3 COMMON/ONE/FREQ,NRFREQ
4 $ XTRAR(NRMODE, NRFREQ), XTRAI(NRMODE, NRFREQ),
5 $ STPP(NRMODE, NRFREQ), STPI(NRMODE, NRFREQ),
6 $ MCOF(NRMODE, NRFREQ), KK(NRMODE), NF, NI, LM
7 COMMON/TWO/XX(NRFREQ), YY(NRFREQ), B(NRFREQ), C(NRFREQ), D(NRFREQ),
8 $ YC(4, NRMODE, NRFREQ), BC(4, NRMODE, NRFREQ),
9 $ CC(4, NRMODE, NRFREQ), DC(4, NRMODE, NRFREQ)
10 C
11 END

```

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE  
DEPUTY UNDER SECRETARY OF DEFENSE  
CMD. CONT. COMM & INTELL  
DEPARTMENT OF DEFENSE  
WASHINGTON, DC 20301

DIRECTOR  
COMMAND CONTROL TECHNICAL CENTER  
11440 ISAAC NEWTON SQUARE, N  
RESTON, VA 22091  
C-650

DIRECTOR  
COMMAND CONTROL TECHNICAL CENTER  
ROOM ME682, THE PENTAGON  
WASHINGTON, DC 20301  
C-312

DIRECTOR  
DEFENSE ADVANCED RESEARCH PROJECT  
AGENCY  
1440 WILSON BLVD  
ARLINGTON, VA 22209  
NUCLEAR MONITORING RSCH  
STRATEGIC TECH OFFICE

DEFENSE COMMUNICATION ENGINEERING CENTER  
1860 WIEHLE AVENUE  
RESTON, VA 22090  
CODE R220 (M HOROWITZ)  
CODE R410  
CODE R103

DIRECTOR  
DEFENSE COMMUNICATIONS AGENCY  
WASHINGTON, DC 20305  
CODE 810  
CODE 480  
CODE 101B

DEFENSE COMMUNICATIONS AGENCY  
WWMCCS SYSTEM ENGINEERING ORG  
WASHINGTON, DC 20305  
RL CRAWFORD

DEFENSE TECHNICAL INFORMATION CENTER  
CAMERON STATION  
ALEXANDRIA, VA 22314

DIRECTOR  
DEFENSE INTELLIGENCE AGENCY  
WASHINGTON, DC 20301  
DIAST-5  
DB-4C (EDWARD O'FARRELL)

DIRECTOR  
DEFENSE NUCLEAR AGENCY  
WASHINGTON, DC 20305  
DDST  
TITL TECH LIBRARY  
RAAE  
STVL

DIRECTOR  
JOINT STRAT TGT PLANNING STAFF JCS  
OFFUTT AFB  
OMAHA, NB 68113  
JPST

COMMANDER  
FIELD COMMAND  
DEFENSE NUCLEAR AGENCY  
KIRTLAND AFB, NM 87115  
FCPR

DIRECTOR INTERSERVICE NUCLEAR WEAPONS SCHOOL  
KIRTLAND AFB, NM 87115  
DOCUMENT CONTROL

CHIEF  
LIVERMORE DIVISION FLD COMMAND DNA  
LAWRENCE LIVERMORE LABORATORY  
PO BOX 808  
LIVERMORE, CA 94550  
FCPRL

DIRECTOR  
NATIONAL SECURITY AGENCY  
FT GEORGE G MEADE, MD 20755  
W65  
OLIVER H BARTLETT W32  
TECHNICAL LIBRARY  
JOHN SKILLMAN R52

OJCS/J-3  
THE PENTAGON  
WASHINGTON, DC 20301  
OPERATIONS (WWMCCS EVAL  
OFF, MR TOMA)

OJCS/J-5  
THE PENTAGON  
WASHINGTON, DC 20301  
PLANS & POLICY (NUCLEAR DIVISION)

UNDER SECY OF DEFENSE FOR RESEARCH  
AND ENGINEERING  
DEPARTMENT OF DEFENSE  
WASHINGTON, DC 20301  
S&SS (OS)

DEPARTMENT OF THE ARMY

COMMANDER/DIRECTOR  
ATMOSPHERIC SCIENCES LABORATORY  
US ARMY ELECTRONICS COMMAND  
WHITE SANDS MISSILE RANGE, NM 88002  
DELAS-AE-M (FE NILES)

COMMANDER  
HARRY DIAMOND LABORATORIES  
2800 POWDER MILL RD  
ADELPHI, MD 20783  
DELHD-NP (FN WIMENITZ)  
MILDRED H WEINER DRXDO-II

COMMANDER  
US ARMY FOREIGN SCIENCE & TECH CENTER  
220 7TH STREET, NE  
CHALOTTESVILLE, VA 22901  
R JONES  
PA CROWLEY

COMMANDER  
US ARMY NUCLEAR AGENCY  
7500 BACKLICK ROAD  
BUILDING 2073  
SPRINGFIELD, VA 22150  
MONA-WE (J BERBERET)

CHIEF  
US ARMY RESEARCH OFFICE  
PO BOX 12211  
TRIANGEL PARK, NC 27709  
DRXRD-ZC

DEPARTMENT OF THE NAVY  
CHIEF OF NAVAL OPERATIONS

NAVY DEPARTMENT  
WASHINGTON, DC 20350  
OP 941  
OP-604C3  
OP 943  
OP 981

CHIEF OF NAVAL RESEARCH  
NAVY DEPARTMENT  
ARLINGTON, VA 22217  
CODE 402  
CODE 420  
CODE 421  
CODE 461  
CODE 464

COMMANDING OFFICER  
NAVAL INTELLIGENCE SUPPORT CENTER  
4301 SUITLAND RD BLDG 5  
WASHINGTON, DC 20390

OFFICER-IN-CHARGE  
WHITE OAK LABORATORY  
NAVAL SURFACE WEAPONS CENTER  
SILVER SPRING, MD 20910  
CODE WA501 NAVY NUC PRGMS OFF  
CODE WX21 TECH LIBRARY

COMMANDER  
NAVAL TELECOMMUNICATIONS COMMAND  
NAVTELCOM HEADQUARTERS  
4401 MASSACHUSETTS AVE, NW  
WASHINGTON, DC 20390  
CODE 24C

COMMANDING OFFICER  
NAVY UNDERWATER SOUND LABORATORY  
FORT TRUMBULL  
NEW LONDON, CT 06320  
PETER BANNISTER  
DA MILLER

DIRECTOR  
STRATEGIC SYSTEMS PROJECT OFFICE  
NAVY DEPARTMENT  
WASHINGTON, DC 20376  
NSP-2141

DEPARTMENT OF THE AIR FORCE

COMMANDER  
ADC/DC  
ENT AFB, CO 80912  
DC (MR LONG)

COMMANDER  
ADCOM/XPD  
ENT AFB, CO 80912  
XPQDQ  
XP

AF GEOPHYSICS LABORATORY, AFSC  
HASCOS AFB, MA 01731  
CRU (S HOROWITZ)

AF WEAPONS LABORATORY, AFSC  
KIRTLAND AFB, NM 87117  
SUL (2)  
DYC

COMMANDER  
ROME AIR DEVELOPMENT CENTER, AFSC  
GRIFFISS AFB, NY 13440  
EMTLD DOC LIBRARY

COMMANDER  
ROME AIR DEVELOPMENT CENTER, AFSC  
HANSOM AFB, MA 01731  
EEP JOHN RASMUSSEN

COMMANDER IN CHIEF  
STRATEGIC AIR COMMAND  
OFFUTT AFB, NB 68113  
NRT  
XPFS

LAWRENCE LIVERMORE NATIONAL  
LABORATORY  
PO BOX 808  
LIVERMORE, CA 94550  
TECH INFO DEPT L-3

LOS ALAMOS NATIONAL SCIENTIFIC  
LABORATORY  
PO BOX 1663  
LOS ALAMOS, NM 87545  
DOC CON FOR T F TASCHEK  
DOC CON FOR D R WESTERVELT  
DOC CON FOR P W KEATON

SANDIA LABORATORY  
LIVERMORE NATIONAL LABORATORY  
PO BOX 969  
LIVERMORE, CA 94550  
DOC CON FOR B E MURPHEY  
DOC CON FOR T B COOK ORG 8000

SANDIA NATIONAL LABORATORY  
PO BOX 5800  
ALBUQUERQUE, NM 87115  
DOC CON FOR SPACE PROJ DIV  
DOC CON FOR A D THORNBROUGH  
DOC CON FOR 3141 SANDIA RPT COLL

OTHER GOVERNMENT  
DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS  
WASHINGTON, DC 20234  
RAYMOND T MOORE

DEPARTMENT OF COMMERCE  
OFFICE OF TELECOMMUNICATIONS  
INSTITUTE FOR TELECOM SCIENCE  
BOULDER, CO 80302  
WILLIAM F UTLAUT  
L A BERRY  
A GLENN JEAN

DEPARTMENT OF DEFENSE CONTRACTORS  
AEROSPACE CORPORATION  
PO BOX 92957  
LOS ANGELES, CA 90009  
IRVING M GARFUNKEL

ANALYTICAL SYSTEMS ENGINEERING CORP  
5 OLD CONCORD RD  
BURLINGTON, MA 01803  
RADIO SCIENCES

THE BOEING COMPANY  
PO BOX 3707  
SEATTLE, WA 98124  
GLENN A HALL  
J F KENNEY

ESL, INC  
495 JAVA DRIVE  
SUNNYVALE, CA 94086  
JAMES MARSHALL

GENERAL ELECTRIC COMPANY  
SPACE DIVISION  
VALLEY FORGE SPACE CENTER  
GODDARD BLVD KING OF PRUSSIA  
PO BOX 8555  
PHILADELPHIA, PA 19101  
SPACE SCIENCE LAB (MH BORTNER)

KAMAN TEMPO  
816 STATE STREET  
PO DRAWER QQ  
SANTA BARBARA, CA 93102  
B GAMBILL  
DASIAC  
WARREN S KNAPP

GTE SYLVANIA, INC  
ELECTRONICS SYSTEMS GRP  
EASTERN DIVISION  
77 A STREET  
NEEDHAM, MA 02194  
MARSHAL CROSS

ITT RESEARCH INSTITUTE  
10 WEST 35TH STREET  
CHICAGO, IL 60616  
TECHNICAL LIBRARY

UNIVERSITY OF ILLINOIS  
DEPARTMENT OF ELECTRICAL ENGINEERING  
URBANA, IL 61803  
AERONOMY LABORATORY

JOHNS HOPKINS UNIVERSITY  
APPLIED PHYSICS LABORATORY  
JOHNS HOPKINS ROAD  
LAUREL, MD 20810  
J NEWLAND  
PT KOMISKE

LOCKHEED MISSILE & SPACE CO, INC.  
3251 HANOVER STREET  
PALO ALTO, CA 94304  
E E GAINES  
W L IMHOF D/52-12  
J B REAGAN D652-12  
R G JOHNSON D/52-12

MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
LINCOLN LABORATORY  
PO BOX 73  
LEXINGTON, MA 02173  
D M TOWLE

MISSION RESEARCH CORPORATION  
735 STATE STREET  
SANTA BARBARA, CA 93101  
R HENDRICK  
F FAJEN

MITRE CORPORATION  
PO BOX 209  
BEDFORD, MA 01730  
G HARDING

PACIFIC-SIERRA RESEARCH CORP  
1456 CLOVERFIELD BLVD  
SANTA MONICA, CA 90404  
E C FIELD, JR

PENNSYLVANIA STATE UNIVERSITY  
IONOSPHERIC RESEARCH LABORATORY  
318 ELECTRICAL ENGINEERING EAST  
UNIVERSITY PARK, PA 16802  
IONOSPHERIC RSCH LAB

R&D ASSOCIATES  
PO BOX 9695  
MARINA DEL REY, CA 90291  
FORREST GILMORE  
WILLIAM J KARZAS  
PHYLLIS GREIFINGER  
CARL GREIFINGER  
H A ORY  
BRYAN GABBARD  
R P TURCO  
SAUL ALTSCHULER

RAND CORPORATION  
1700 MAIN STREET  
SANTA MONICA, CA 90406  
TECHNICAL LIBRARY  
CULLEN CRAIN

SRI INTERNATIONAL  
333 RAVENSWOOD AVENUE  
MENLO PARK, CA 94025  
DONALD NEILSON  
GEORGE CARPENTER  
W G CHETNUT  
J R PETERSON  
GARY PRICE

STANFORD UNIVERSITY  
RADIO SCIENCE LABORATORY  
STANFORD, CA 94305  
R A HELLIWELL  
FRASER SMITH  
J KATSUFRAKIS

CALIFORNIA INSTITUTE OF TECHNOLOGY  
JET PROPULSION LABORATORY  
4800 OAK GROVE DRIVE  
PASADENA, CA 91103  
ERNEST K SMITH



**END**

**FILMED**

**11-83**

**DTIC**