

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE		2. REPORT TYPE Viewgraphs		3. DATES COVERED	
4. TITLE AND SUBTITLE Airborne Icing Tanker Spray Array			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Thomas Hane			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Air Warfare Center Aircraft Division 22347 Cedar Point Road, Unit #6 Patuxent River, Maryland 20670-1161			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Naval Air Systems Command 47123 Buse Road Unit IPT Patuxent River, Maryland 20670-1547			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			Thomas Hane
Unclassified	Unclassified	Unclassified	Unclassified	11	19b. TELEPHONE NUMBER (include area code) (301) 342-0306



AIRBORNE ICING TANKER



AIRBORNE ICING TANKER SPRAY ARRAY



26 Oct 1999


DTIC QUALITY INSPECTED 1

20000407 178

Thomas Hane
NAVAIR 4.3.1
Patuxent River MD 20670
301-342-0306
haneth@navair.navy.mil



AIRBORNE ICING TANKER

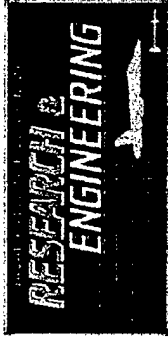

AIT SYSTEM REQUIREMENTS


LWC, MVD DEFINED BY FAR PART 25 (next chart)
CLOUD SIZE 8 FT DIA. (MIN.)
SLD 0.1 TO 0.5 LWC, 50 TO 500 microns

SUBSYSTEM REQUIREMENTS


WATER:
FLOW RATE 33 gpm for 8 ft dia cloud with LWC = 2
 52 gpm for 10 ft dia cloud
AIR:
PRESSURE 58 psig at engine - (A/C ducts + boom + array)
FLOW RATE up to 105 lb/min, up to 6 scfm per nozzle



AIRBORNE ICING TANKER

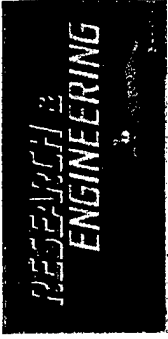


AIT CLOUD PHYSICS

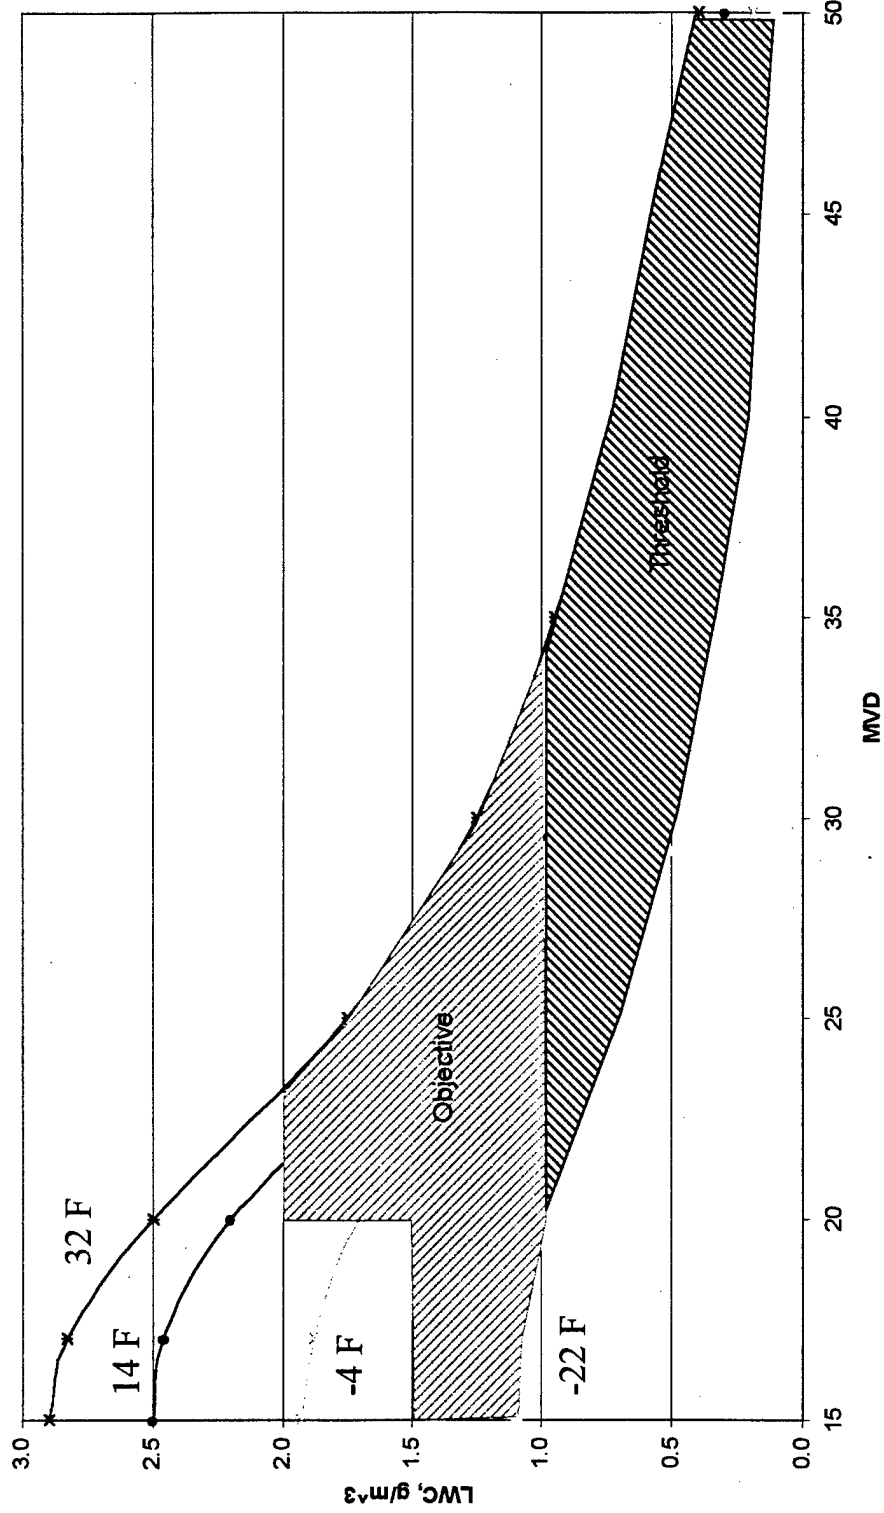



AIRBORNE ICING TANKER

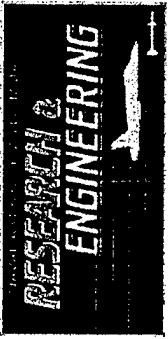


ARRAY DESIGN CONSTRAINTS

- AIR SUPPLY
 - ENGINE BLEED AIR, 9TH STAGE, 58 PSIG AT STRUT
- DRAG
 - CANNOT EXCEED EXISTING SPRAY BOOM LIMITS
 - USE OF AIRFOILS TO MINIMIZE
- WEIGHT
 - CANNOT EXCEED EXISTING SPRAY BOOM LIMITS
 - LIMITS SIZE OF NEW ARRAY, COMBINED WITH DRAG
- MAINTENANCE
 - ACCESS TO PLUMBING, REMOVEABLE NOZZLES



AIRBORNE ICING TANKER

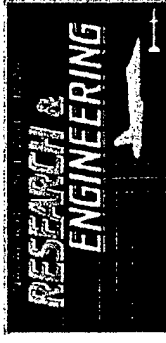

ARRAY DESIGN PLAN

FY99

- NARROW NOZZLE CHOICES, # OF NOZZLES, ARRAY CONCEPT, INTERNAL PLUMBING, DRAG PREDICTION, AERO LOADS, MANUFACTURING SELECTION, EXTERNAL LIMITS

FY00



- SELECT NOZZLE, CONDUCT DRAG CFD ANALYSIS, HEAT TRANSFER CALC, DROPLET DISPERSION CFD, HYDRAULIC ANALYSIS, SCALE MODEL TESTING, DETAIL DESIGN ARRAY, ENGR DRAWINGS

FY01

- FABRICATE ARRAY, FULL SCALE GROUND TESTS




AIRBORNE ICING TANKER

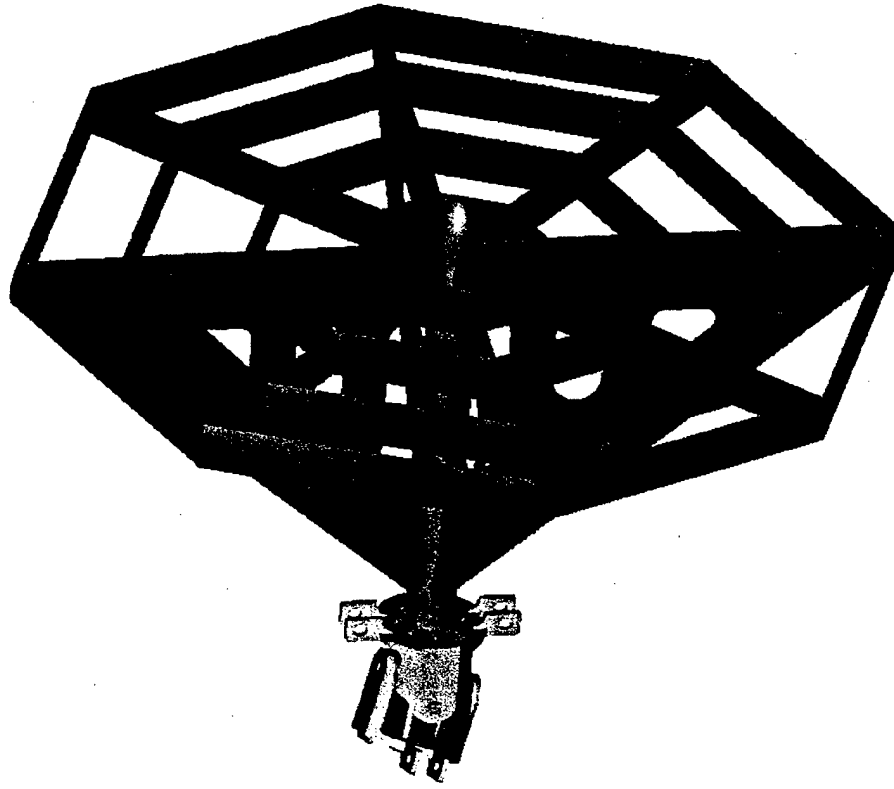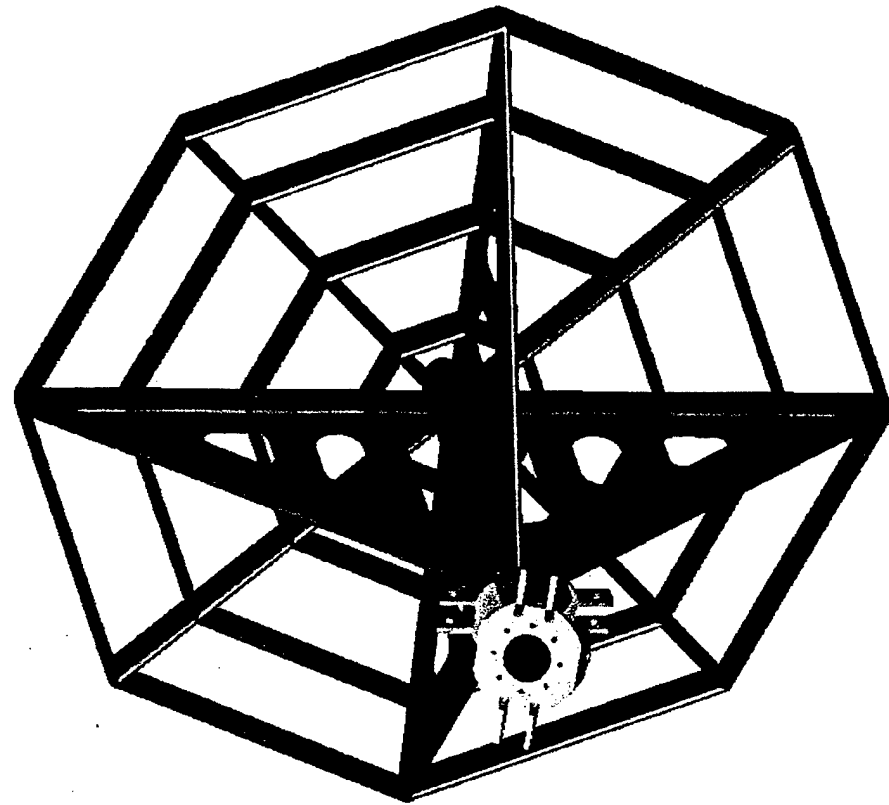





AIRBORNE ICING TANKER

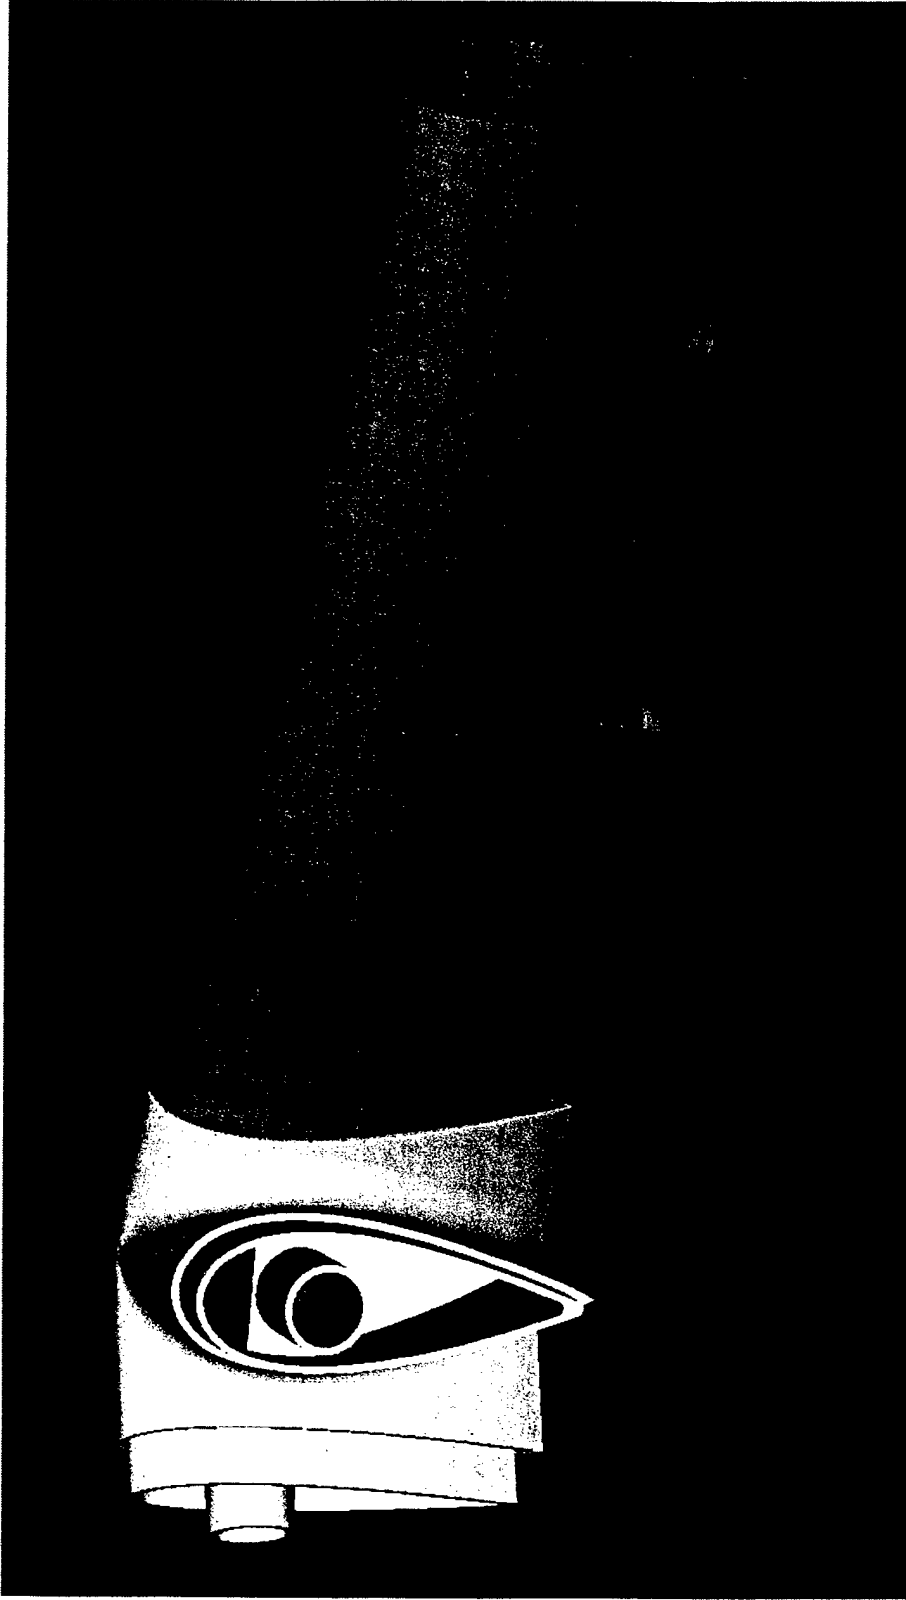




AIRBORNE ICING TANKER

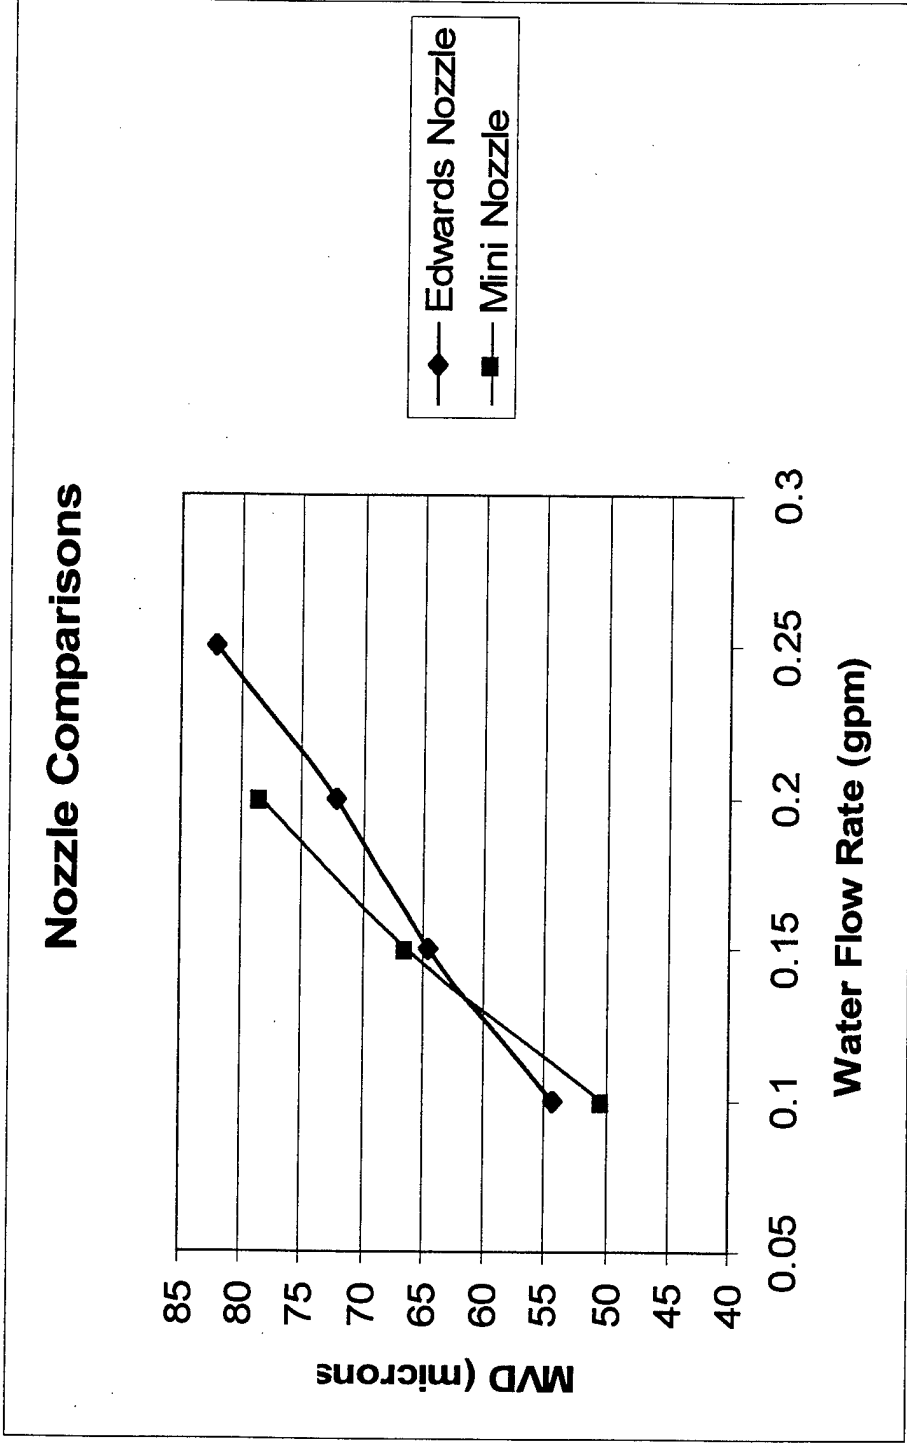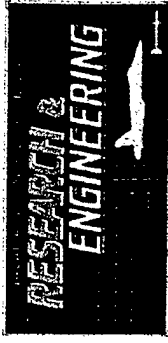

Testing w/ 45 psi air, PDPA at 3 ft standoff, 10 runs at each point
 Edwards: Spray Systems Nozzle 1/4J 60100-140-1110SS
 Mini: Spray Systems Nozzle 1/8PAJSS 140-6-37-70 (no fluid cap)



AIRBORNE ICING TANKER

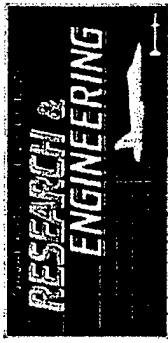

Back-ups




AIRBORNE ICING TANKER



INTERMITTENT MAXIMUM (CUMULIFORM CLOUDS)
FAR PART 25 Vs ARTIFICIAL CONDITIONS
LWC Vs MVD


—□— +32 F —○— +14 F - - - - -4 F - - - - -22 F · Tanker Calibration

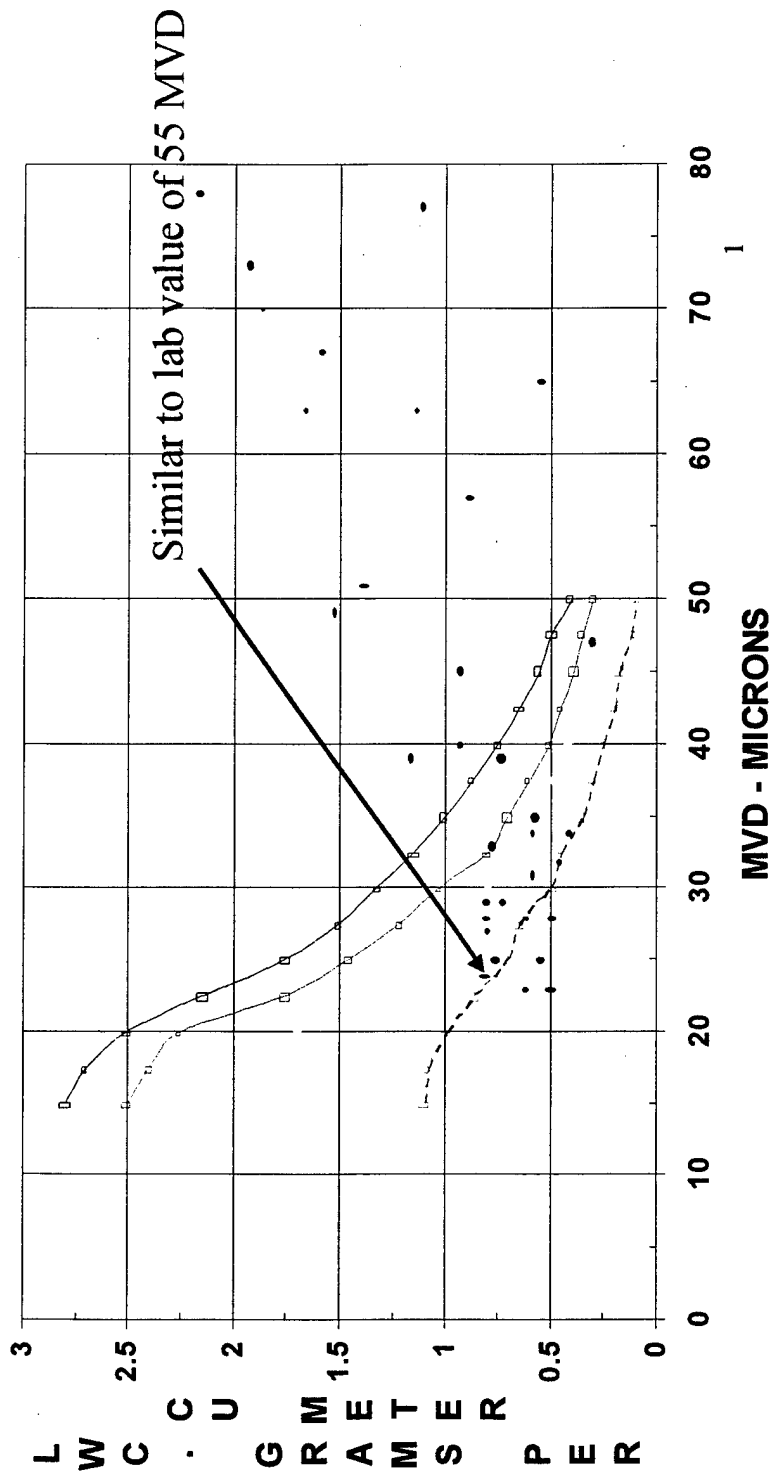

AIR FORCE KC-135A PAST TEST DATA



AIRBORNE ICING TANKER



SYSTEM REQUIREMENTS

System Capabilities and Characteristics	Thresholds	Objectives
Icing Cloud Liquid Water Content (LWC), Median Volumetric Diameter (MVD), and Temperature	those portions of FAR Part 25 Continuous and Intermittent Maximum conditions shown in Appendix A	threshold + those additional portions of FAR Part 25 Continuous & Intermittent Maximum conditions shown in Appendix A
Icing Cloud Size at 50 ft behind array	8 ft diameter	15 ft diameter
Supercooled Large Drop Liquid Water Content	0.10 to 0.50 gram per cubic meter	-
Supercooled Large Drop Diameter	50 to 500 microns	-
Supercooled Large Drop Distribution	N/A	IAW with Table 2 below
Supercooled Large Drop Temperature Range	0° to -15° Celsius	-
Supercooled Large Drop Cloud Size at 50 ft behind array	8 ft diameter	15 ft diameter
Rain Cloud Rainfall Rate	5.0 inches per hour	7.0 inches per hour
Rain Cloud Median Volumetric Drop Diameter	1 mm	2 mm
Rain Cloud Size at 50 to 75 ft behind array	5 ft	-