



NRL/MR/7183--07-9062

Bounded Elliptical Modes

GEORGE B. SMITH

*Acoustic Simulation, Measurements, and Tactics Branch
Acoustics Division*

August 7, 2007

Approved for public release; distribution is unlimited.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

1. REPORT DATE (DD-MM-YYYY) 07-08-2007		2. REPORT TYPE Memorandum Report		3. DATES COVERED (From - To) 1 Apr 04 – 4 Jul 07	
4. TITLE AND SUBTITLE Bounded Elliptical Modes				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 62435N	
6. AUTHOR(S) George B. Smith				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER 6866	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory, Code 7183 Acoustics Division Stennis Space Center, MS 39529-5004				8. PERFORMING ORGANIZATION REPORT NUMBER NRL/MR/7183--07-9062	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Commanding Officer Naval Research Laboratory 4555 Overlook Avenue, SW Washington, DC 20375-5320				10. SPONSOR / MONITOR'S ACRONYM(S) NRL	
				11. SPONSOR / MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The Pekeris waveguide is used to derive an estimation technique for radial wavenumbers for the modal structure of an acoustic field in a given environment. While these estimates are inadequate for coherent processing (such as matched field processing), they are nonetheless useful since they are adequate for waveguide invariant calculations and for environmental province boundary calculations.					
15. SUBJECT TERMS Normal modes Propagation					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			George B. Smith
Unclassified	Unclassified	Unclassified	UL	7	19b. TELEPHONE NUMBER (include area code) (228) 688-5892

Bounded Elliptical Modes

George B. Smith

Acoustics Division (Code 7183), Naval Research Laboratory, Stennis Space Center, MS 39529

ABSTRACT

The Pekeris waveguide is used to derive an estimation technique for radial wavenumbers for the modal structure of an acoustic field in a given environment. While these estimates are inadequate for coherent processing (such as matched field processing) they are none-the-less useful since they are adequate for waveguide invariant calculations and for environmental province boundary calculations.

PEKERIS WAVEGUIDE

The Pekeris waveguide¹ is an example of a waveguide that can be treated analytically. It is an isovelocity two-fluid model where the sediment is modeled as a fluid half-space. The channel parameters are the water sound speed, c_w , the sediment sound speed, c_s , the channel depth, h , and the ratio of sediment to water density, $b = \rho_s / \rho_w$. The dispersion for this waveguide is given by

$$\tan\left(h\sqrt{\left(\frac{\omega}{c_w}\right)^2 - k_n^2}\right) = -b\sqrt{\frac{\left(\frac{\omega}{c_w}\right)^2 - k_n^2}{\left(\frac{\omega}{c_s}\right)^2 - k_n^2}}. \quad (1)$$

This is a very useful model because it allows relatively simple calculations, and has many of the features of typical shallow water sites.

Manuscript approved July 5, 2007.

RADIAL WAVENUMBER ESTIMATION

The Pekeris dispersion relationship (1) implies the general bounds

$$\left(\frac{\omega}{c_s}\right)^2 \leq k_n^2 \leq \left(\frac{\omega}{c_w}\right)^2 \quad (2)$$

on wavenumber as well as an expression for the number of trapped modes^{2,3}

$$M \leq \frac{1}{2} + \frac{2fh}{c_w} \sqrt{1 - \left(\frac{c_w}{c_s}\right)^2} \quad (3)$$

Assuming the usual elliptical functional dependence of the wavenumber on mode-number, we write

$$k_n = \sqrt{\left(\frac{\omega}{c_w}\right)^2 - an^2} \quad (4)$$

where a is approximated by

$$a = \frac{\left(\frac{\omega}{c_w}\right)^2 - \left(\frac{\omega}{c_s}\right)^2}{M^2} \quad (5)$$

This arrangement satisfies the bounds expressed in (2).

Equations (3 - 5) allow a quick and dirty approximation of the modal wavenumbers at any point in a large and complicated environment. While such wavenumbers would not be adequate for phase coherent processing such as matched field localization, they would be adequate for tasks such as environmental provincing or calculation of the waveguide invariant⁴.

SIMULATION RESULTS

A simple 100 m deep Pekeris environment was constructed with an isovelocity water sound speed of 1500 m/s, a sediment sound speed of 1700 m/s, a water density of 1 g/cc, and a sediment density of 1.5 g/cc. Equations (3 - 5) were applied to this environment to estimate the radial wavenumbers. Other estimates were also calculated for comparison.

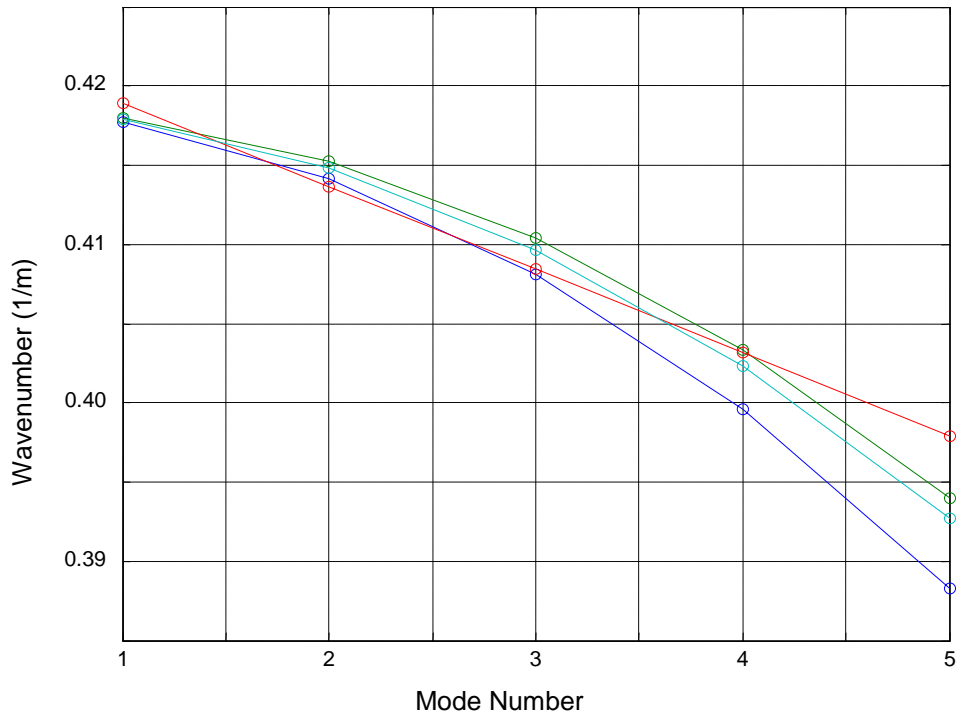


Figure 1- Estimated wavenumbers for Pekeris (green), bounded elliptical (cyan), rigid waveguide (blue), and bounded linear (red).

Figure (1) shows the radial wavenumbers at 100 Hz for several different ways of estimating these wavenumbers. Since the environment is a Pekeris environment, the radial wavenumbers (green) calculated with the Pekeris dispersion (1) are ground truth for this example. The wavenumbers calculated using the rigid waveguide assumption

(blue) are not very close. The wavenumbers calculated using a linear functional dependence on mode number (red) between the bounds given in (2) are not at all satisfactory. But, the wavenumbers calculated using the elliptical functional dependence (cyan) on mode number given by (4) between the bounds given in (2) are reasonably close to (Pekeris) ground truth.

CONCLUSION

It is clear from these results that while the wavenumber estimates are not good enough to perform coherent processing such as matched field processing, they are adequate for waveguide invariant calculations or for defining province boundaries.

ACKNOWLEDGEMENT

This work was funded by the Naval Research Laboratory under Program Element 62435N.

BIBLIOGRAPHY

1. C. L. Pekeris, "Theory of propagation of explosive sound in shallow water," *Geol. Soc. Amer. Mem.* **27** (1948).
2. George V. Frisk, "Ocean and Seabed Acoustics," (PTR Prentice-Hall, New Jersey, 1994), Eq. 5.157 on pg. 151.
3. F. B. Jensen and M. C. Ferla, "SNAP: The SACLANTCEN normal-mode acoustic propagation model," SACLANTCEN Memorandum SM-121 (1979).
4. G. L. d'Spain and W. A. Kuperman, "Application of waveguide invariants to analysis of spectrograms from shallow water environments that vary in range and azimuth," *J. Acoust. Soc. Am.* **106**, 2454–2468 (1999).

