

A Brief History of Active Sonar

Angela D'Amico¹ and Richard Pittenger²

¹*Space and Naval Warfare Systems Center Pacific, 53560 Hull Street, San Diego, CA 92152-5001, USA;*
E-mail: angela.damico@navy.mil

²*Woods Hole Oceanographic Institution, 266 Woods Hole Road, Woods Hole, MA 02543-1049, USA*

Abstract

As background for this special issue on strandings and mid-frequency active sonar (MFAS), this paper presents a brief history of active sonar, tracing the development of MFAS from its origins in the early 20th century through the development of current tactical MFAS.

Key Words: mid-frequency active sonar, MFAS, anti-submarine warfare, ASW, whales

Introduction

It has been suggested from several fronts in recent years that surface ship mid-frequency active sonar (MFAS) use is responsible for mass strandings of beaked whales (family Ziphiidae) (Frantzis, 1998, 2004; Evans & England, 2001; Martín Martel, 2002; Brownell et al., 2004; Freitas, 2004; Martín et al., 2004). To provide background for this special issue on strandings and MFAS, a brief history of active sonar is presented that traces the development of MFAS from its origins in the early 20th century through the development of current tactical MFAS. An overview of their parameters as well as their use over time is also provided. A glossary defining the terminology used in this paper is presented in the "Appendix."

Summary History of Active Sonar

Two events underscore the value of underwater acoustics for the detection of submerged objects: (1) the loss of the *HMS Titanic* to an iceberg during her maiden voyage on 15 April 1912 and (2) Allied shipping losses to U-boat attacks during World War I. In response to the need for enhanced detection of submerged objects and enemies, the first successful underwater transducer developed was a 540-Hz electrodynamically driven circular plate, conceived and designed by Reginald A. Fessenden while he was working for the Submarine Signal Company in Boston, Massachusetts. Work on this system started in 1912, and a patent was awarded in 1913. In 1914, the system demonstrated the power of echo ranging with the detection of a distant iceberg 3.2 km off

the coast of Newfoundland, Canada. Work on what was termed the Fessenden oscillator was conducted until 1931, during which time the frequency was increased from 540 Hz to 1,000 Hz (Lasky, 1977; Hackman, 1984; Bjørnø, 2003; Katz, 2005).

The emergence in World War I of the submarine as a weapon of choice of weaker naval powers—an "asymmetrical threat" in today's parlance—stimulated the need to detect submerged submarines that were otherwise invisible (Cote, 2000). The stealthiness of the submarine and the opacity of the oceans profoundly changed naval warfare for the remainder of the 20th century (Keegan, 1990; Cote, 2000). Since sound is the only transmitted energy that penetrates water for any appreciable distance, acoustic echo-ranging had to be exploited to counter this threat.

The most important echo-ranging system to emerge after World War I was the ultrasonic ASDIC, a cooperative effort by the British and French Navies. ASDIC, an acronym for Allied Submarine Detection Investigation Committee, was formed during World War I to conduct research on the detection of submarines. Similar research was undertaken in Italy and more extensively in the United States. In 1918, the first ASDIC system was demonstrated by Paul Langevin, a French physicist, using a transmitter that was designed to mechanically resonate at 38 kHz and was used to estimate target range and bearing (Lasky, 1977; Urlick, 1983; Burdic, 1984; Hackman, 1984; Bjørnø, 2003; Proc, 2005).

The first ASDIC shipboard systems, which had a covered dome that allowed the system to operate while the ship was moving, were installed in 1919. Operating frequencies varied from 20 to 50 kHz. During the 1920s and early 1930s, ASDICs were developed for use on destroyers for anti-submarine warfare (ASW). The inter-war period was also a time for basic research in underwater acoustics. One key discovery during this period was that amplitude of higher frequencies of underwater sound are attenuated more than lower frequencies as they pass through seawater. Based on this observation, the frequency range for a new destroyer ASDIC (type 119) was dropped from

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 2009		2. REPORT TYPE		3. DATES COVERED 00-00-2009 to 00-00-2009	
4. TITLE AND SUBTITLE A Brief History of Active Sonar				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) 1Space and Naval Warfare Systems Center Pacific,,53560 Hull Street,San Diego,CA,92152-5001				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT see report					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

21 to 31 kHz to 14 to 26 kHz and stabilized a few years later at 14 to 22 kHz. The typical frequency for ASDIC during that time, and subsequently during World War II, was 20 kHz, with the primary goal of detecting submarines near surface ships that were their potential targets (Hackman, 1984). After World War II, ships with ASDIC sets were used by the whaling industry for different reasons other than submarine detection (Haslett, 1967; Ellis, 1991; Brownell et al., 2008).

Another major development in active echo-ranging systems occurred when the U.S. Naval Research Laboratory developed the first “QA” sonar, which was to become the first destroyer-mounted, echo-ranging sonar in the U.S. Navy, operating at 15 to 20 kHz. By 1933, the QA sonar was installed on eight destroyers. Subsequent improvements in transducer technology yielded the QC series, which was installed as a standard ASW active sonar on all U.S. destroyers at the outbreak of World War II (Friedman, 1988). When two-letter designators were used for U.S. Navy equipment, the first letter indicated the type of equipment (Q represented Sonar Echo Ranging Listening equipment) and the second letter indicated the subtype of the equipment (Parsch, 2008).

Use of the word *sonar* for these systems, defined as Sounding Navigation and Ranging, was coined in 1942 by F. V. Ted Hunt, director of the Harvard Underwater Sound Laboratory (Hackman, 1984). All of the World War II sonars had transducers consisting of a flat-faced array of elements in spherical or tear-shaped housings that were mechanically lowered below the hull and also mechanically trained (turned) in azimuth. A Naval Sonar Operator’s manual published just after World War II (Bureau of Naval Personnel, 1953) provides a diagram of the traditional sonar dome (Figure 1). Between the late 1940s and 1960, in response to improvements in submarine technology and the increased threat this represented, surface ship active sonars were developed for the U.S. Navy. The major Cold War active sonar technology development was the advent of scanning sonar to compensate for faster submarine speeds and the need to switch rapidly from long-range to short-range detection of an attacking submarine. In a scanning sonar, the transducer becomes an array of elements arranged in a vertically oriented cylinder. This permits omnidirectional transmission and reception. Scanning sonar provides directional search capability via sending and receiving focused sound energy in multiple directions simultaneously with different ping intervals. Longer ping intervals allow longer-range detections, which are derived from the time it takes for the ping to reach a target and for the

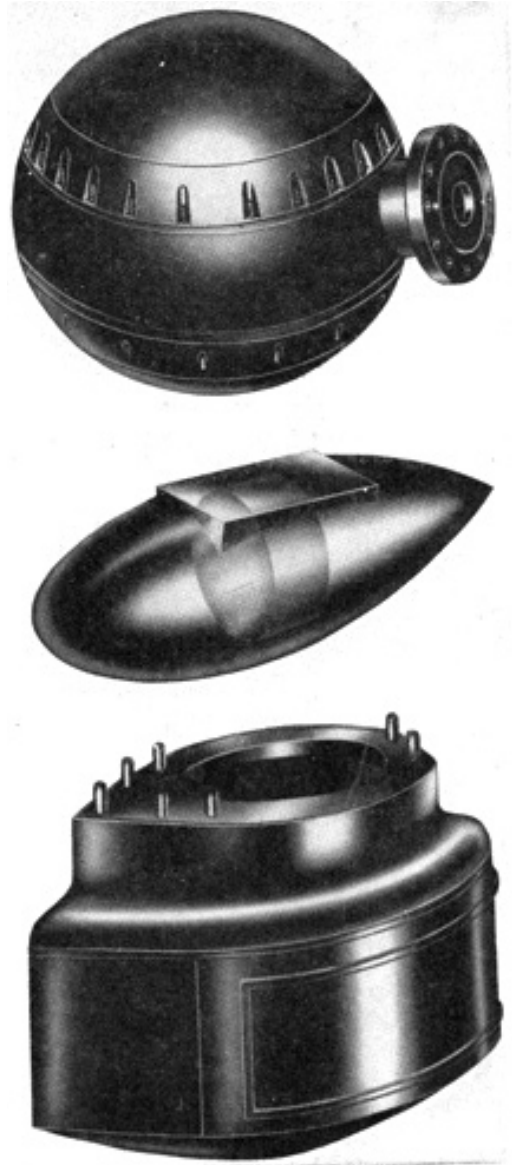


Figure 1. Standard World War II sonar domes (Bureau of Naval Personnel, 1953); reproduced with permission from the Historic Naval Ships Association.

echo to return (Hackman, 1984; Friedman, 1988). The QHba series was the first scanning active sonar, and it operated at 28 kHz (Friedman, 1988; Cote, 2000). Figures 2 and 3 show a cut-away of a scanning sonar and a diagram of the QCB system, respectively.

The AN/SQS-4 sonar was proposed in 1948 as a 14 kHz equivalent of the QH sonar. The AN/SQS-4 was first tested in 1951 and entered fleet service in 1954, primarily on surface ships

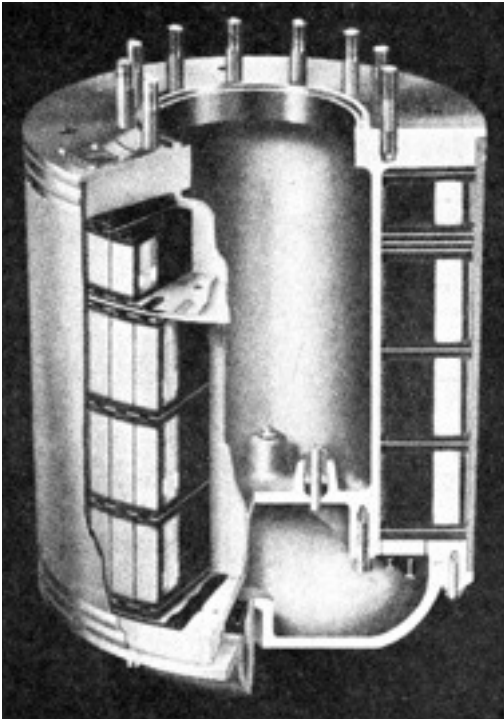


Figure 2. Cut-away view of the first scanning sonar transducer (Bureau of Naval Personnel, 1953); reproduced with permission from the Historic Naval Ships Association.

and some submarines. System designators were originally called the Army-Navy Nomenclatures System (the prefix “AN”). There is a three letter and a number designator for the surface ship sonars. “SQS” signifies “S” – Surface ship, “Q” – Sonar, and “S” – Search. The number represents the series (Cowden, 2005).

The detection range of these sonars was limited by their operating frequency, leading to the development of lower frequency active sonars to minimize attenuation loss and thus increase detection ranges. Later versions of the AN/SQS-4 reduced the typical operating mode to four variants: (1) 8 kHz, (2) 10 kHz, (3) 12 kHz, and (4) the original 14 kHz (Hackman, 1984; Friedman, 1988, 1989; Cote, 2000; Watter, 2004). The next improvement in surface sonars was RDT (Rotational Directional Transmission), which permitted increased transmitted power by pulsing groups of hydrophones in sectors sequentially. This feature was back-fitted into the existing AN/SQS-4 series sonars, which were then redesignated AN/SQS-29 through AN/SQS-32 (for AN/SQS-4, mod 1, 2, 3, 4, respectively) (Friedman, 1989). RDT was also utilized in new follow-on sonars.

The U.S. Navy also continued its quest for lower-frequency sonars through the development

of the AN/SQS-23 sonar with a frequency of 4.5 to 5.5 kHz. The AN/SQS-23 replaced AN/SQS-4 on some older destroyers under the Fleet Rehabilitation and Modernization (FRAM I) program and was installed in new construction ships. Many of the replaced AN/SQS-4 versions were transferred to Allied navies during the 1950s and 1960s (Hackman, 1984; Friedman, 1988, 1989; Cote, 2000; Watter, 2004). The goal of the AN/SQS-23 sonar was to provide a standoff engagement capability to its ship, which was then being equipped with the ASROC (anti-submarine rocket) system with a nominal range of about 5 nmi, which was introduced in 1961. ASROC could deliver payloads consisting of either homing torpedoes or nuclear depth charges. Prior to the advent of the ASROC ASW weapon, weapon delivery was very short range. The AN/SQS-23 was installed in all DDG-2, DLG-6, and FRAM I-class destroyers (Hackman, 1984; Watter, 2004).

Up to this point, all surface sonars were capable of using only the direct acoustic path (DP) data that limited sonar detection ranges to 5 nmi or less. However, Dr. Maurice Ewing of the Woods Hole Oceanographic Institution, working closely with the U.S. Navy, demonstrated the existence of much longer-range acoustic paths (Ewing & Worzel, 1945). These were the bottom bounce (BB) path, the convergence zone (CZ) path, and the deep sound channel. Ewing’s discoveries were instrumental to all subsequent sonar development. In particular, the sound channel has been exploited by the U.S. Navy’s Sound Surveillance System (SOSUS) (Whitman, 2005).

Exploitation of the BB and CZ paths constituted the largest U.S. Navy investment in sonar development in the Cold War. Cox (1974), Urick (1983), and Payne (2006) discuss the application of these underwater sound paths to sonar. Using these acoustic paths drove sonar frequencies even lower and required more power, better pulse shapes, and more processing. The results of these efforts were the AN/SQS-26 and AN/SQS-53 sonars (commonly referred to now as MFAS).

In 1955, technology was developed to further lower active sonar frequencies, leading to the 3.5-kHz AN/SQS-26, which represented the culmination of U.S. tactical MFAS development. Feasibility studies for the AN/SQS-26 began in 1955, and the prototype model was installed in 1961 on the *USS Wilkinson*. Since larger transducers are required to produce lower frequencies, a special class of ASW frigates was commissioned specifically to accommodate the new sonar. Starting in 1960, 58 frigates were authorized to be equipped with the AN/SQS-26 sonars. The U.S. Navy accepted the AN/SQS-26 for service in 1968. Concurrently, the U.S. Navy also modernized its

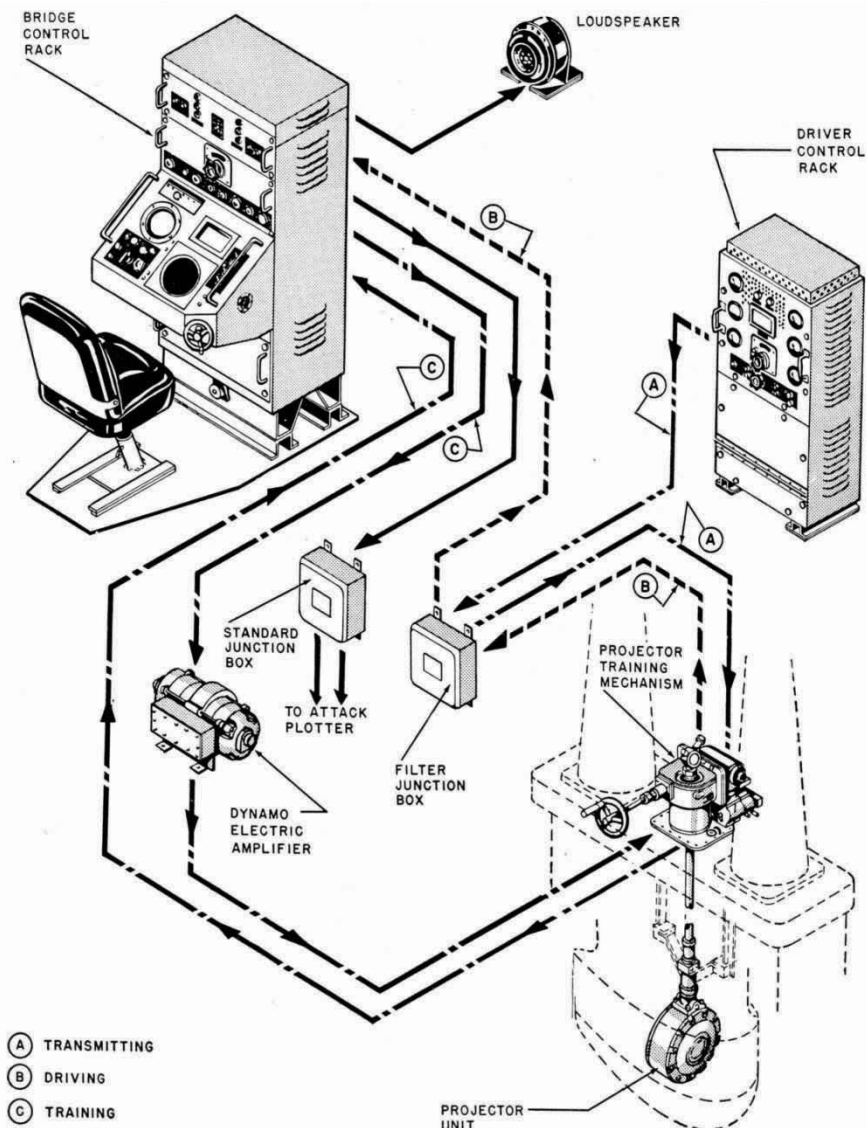


Figure 3. Pictorial diagram of the QGB System (Bureau of Naval Personnel, 1953); reproduced with permission from the Historic Naval Ships Association.

existing World War II-era destroyers (a total of 79 Gearing class destroyers) with hull-mounted AN/SQS-23 sonars (Hackman, 1984; Friedman, 1988, 1989; Cote, 2000; Watter, 2004).

The AN/SQS-26 and its solid-state successor, the AN/SQS-53, are the current standards for U.S. tactical MFAS. The AN/SQS-53 began delivery in 1972. The latest version is the AN/SQS-53C, which was evaluated and tested from 1986 to 1989. Evans & England (2001) documented AN/SQS-53C center frequencies at 2.6 and 3.3 kHz. Several foreign navies employ

the AN/SQS-26 (Friedman, 1989; Watter, 2004). Another commonly used surface ship active sonar is the AN/SQS-56 and the export version, the DE 1160B, which operates at 5.6, 7.5, and 8.4 kHz (Friedman, 1989). The AN/SQS-56 was approved for service use in 1980. By 2003, 33 systems were in use by the U.S. Navy, and approximately 63 systems were in use in foreign navies (Watter, 2004). Table 1 summarizes this evolution of surface ship sonar. Surface ship echo-ranging systems have evolved since World War I with systems that have lower operating frequencies, higher transmitted

Table 1. Evolution of surface ship sonars from the end of World War I until the present time; surface ship echo-ranging systems have evolved since World War I with systems that have lower operating frequencies, higher transmitted power, and longer pulse lengths. Source levels for the QHBa, AN/SQS 10, AN/SQS 4 series, and AN/SQS 29-32 that were estimated assumed values reported in references 2 and 3 are the acoustic power, not the input electrical power. If the reported values are electrical power, then the calculated source levels would be low. The calculation for source level is $SL \text{ (dB re } 1\mu\text{Pa at 1 m)} = 171.5 \text{ dB} + 10\log(\text{Pwr})$.

	Inter War		World War II	Post World War II/ Cold War						
Sonar type	ASDIC 111/112	ASDIC 119	QHBa	AN/SQS10	AN/SQS 4/1 AN/SQS 4/2 AN/SQS 4/3 AN/SQS 4/4	AN/SQS 29 AN/SQS 30 AN/SQS 31 AN/SQS 32	AN/SQS 23	AN/SQS 26	AN/SQS 53A-C	AN/SQS 56
Frequency (kHz)	20-50	14-26	28	20	8,10,12,14	8,10,12,14	4.5, 5, 5.5	3.5	2.6, 3.3	6.8,7.5,8.2
Power (kW)			6	4-50	10-50	4-50	60			
Source level (dB re 1μPa at 1 m)			209	208 - 218	212-218	208 - 218	219		235	223
Pulse length (msec)				6,30,80	6,30,80	2,7,30,120	2,5,30,120		1000-2000	1000-2000
Reference	1	2	2	3	3	3	3	3	4	4

1. Hackman (1984); 2. Bureau of Naval Personnel (1953); 3. Friedman (1989); 4. Evans & England (2001)

Table 2. Number of U.S. Navy combatants ASW platforms from the end of World War II to the present time; derived from U.S. Naval History and Heritage Command (2009).

Date	Era	Destroyers	Frigates	Patrol	Totals
August 1945	End of WW II	377	361	1,204	1,942
June 1957	Pre Sputnik	253	84	12	349
June 1963	MFAS in service	222	40	0	262
June 1975	End Vietnam	102	64	13	179
September 1990	End Cold War	57	99	6	162
2009	Present	54	30	0	84

power, and longer pulse lengths. Table 2 lists the distribution of vessels capable of sonar use in each major era.

Although advances in passive acoustics during the Cold War promulgated the increased use of passive sonar technologies, MFAS has remained standard equipment on almost all frigates and destroyers with ASW missions. In the 1970s, as submarines were equipped with intercontinental ballistic missiles, the development of long-range passive sensors was accelerated (Hackman, 1984). However, as both nuclear and diesel-electric submarines operating on batteries became progressively and simultaneously quieter and faster, and thus more difficult to detect in a timely manner, the U.S. and its NATO allies also began to pursue alternatives to passive acoustics, resulting in the development of low-frequency active sonars (LFAS) systems in the 1990s through to the first decade of the 21st century to achieve greater submarine detection ranges. Tyler (1992) and Pengeley & Scott (2004)

provide summaries of the current LFAS systems being developed by various nations.

Since the end of the Cold War, the U.S. Navy's operational focus has shifted increasingly to littoral warfare (Morgan, 2005). Littoral warfare, as defined in the National Research Council (NRC) (1994) publication, *Coastal Oceanography and Littoral Warfare*, is the use of combined forces designed for coordinated sea-land-air operations. This publication categorizes the littoral regime as consisting of four subdivisions: (1) harbors and approaches, (2) straits and archipelagoes, (3) the surf zone, and (4) the continental shelf. Additional information on littoral warfare can be found in Tyler (1992), U.S. Department of the Navy (U.S. DoN) (1993), Space and Naval Warfare Command (1996), Scott (2000), and Pengeley & Scott (2004).

To give the reader unfamiliar with military exercises some idea of the range and focus of a typical array of U.S. and multinational exercises and the type of equipment used by global navies,

information is available at the websites that follow:

Official U.S. Navy Websites

- *A Program Guide to the U.S. Navy* (2000 ed.): www.chinfo.navy.mil/navpalib/policy/vision/vis00/contents.html
- National Technical Information Center (NTIS): www.ntis.gov
- U.S. Navy: www.navy.mil
- U.S. Fleet Forces Command: www.cffc.navy.mil

Non-Official Websites

- Federation of American Scientists: www.fas.org
 - Global Security: www.globalsecurity.org
- The U.S. Navy's range complexes provide an environment for U.S. forces to conduct realistic combat-like training. A comprehensive description of the type of training exercises conducted on these range complexes can be found in the *Range Complex Environmental Impact Statements* (EISs) that has recently been published. The text of the EISs for three of the major range complexes can be found at the following sites:
- Southern California: www.socalrangecomplexeis.com/default.aspx
 - Hawaii: www.govsupport.us/navynepahawaii/hawaiiirceis.aspx
 - Atlantic Fleet Active Sonar Training (AFASST): <http://afasteis.gcsaic.com>

Discussion

The advent of the submarine, which was a major threat to Allied security in World War I, World War II, and the Cold War, drove the development of sensors to detect them. Sound uniquely penetrates ocean waters for long ranges, and changes to a sound signal as it propagates were therefore exploited as key cues that could be used to image the otherwise impenetrable depths. Acoustic echo-ranging research led to sonars with increasingly lower frequencies and increased transmitted power. The evolution of surface sonars, shown on a timeline in Table 1, culminated with today's MFAS.

Although each new sonar had more power than previous ones, it can be argued that the U.S. Navy is putting considerably less noise into the water than it did at its peak force levels at the end of World War II. As can be seen in Table 2, the number of U.S. Navy combat ships has been reduced by two magnitudes, almost 96% from its force levels at the end of World War II—that is, 84 ships today compared to 1,942 ships in 1945. Additionally, today's ships are designed and built to be quieter

than World War II vintage ships and can regularly employ passive and, when needed, active sonars (Federation of American Scientists [FAS], 2009). In the years between World War II and the early 1970s, surface ships had no passive ASW sensors and had to use active sonar exclusively. Today's ships have improved passive sensors.

When considering the amount of noise put into the seas by U.S. Navy ships, it is useful to consider also that from World War I through the early 1970s, all U.S. Navy ASW combatants and many auxiliary vessels were equipped with depth charges. Dropping depth charges off the stern via a rack or track was standard practice for ASW vessels in both World Wars. The U.S. built over 600,000 depth charges during World War II, and over half of these depth charges were still on hand when hostilities ended. Each Mark 6 (redesigned from the Mark 3) depth charge, commonly used during most of World War II, had nominally the equivalent explosive power of about 136 kg of TNT (*Naval Weapons*, 2008). An operating manual for the Mark 6 and Mark 7 depth charges was published in 1943 (Bureau of Ordnance, 1943). It was standard policy for ships equipped with depth charges to be required to fire a full salvo (up to 30 rounds) every training cycle (yearly). These training evolutions were generally conducted near home ports, especially Norfolk and San Diego. Depth charges were phased out of the U.S. Navy in the early 1970s, having been replaced by homing torpedoes (Captain J. Binford, USN[Ret], pers. comm.; Pittenger, pers. experience as Force ASW Readiness and Training Officer on the Surface Type Commander Staffs, 1971-1976).

Commercial active sonars, designed for detecting underwater objects, are a source of anthropogenic noise. Typically, they operate at higher frequencies, project lower power, and have significant spatial resolution with narrower beam patterns and short pulses. Richardson et al. (1995) and the NRC (2003) provide a discussion of anthropogenic noise provided by commercial sonars and pingers.

MFAS is the primary ASW sensor on U.S. Navy combatants today. The frequency range of these sonars is low to exploit lower propagation loss than at higher frequencies, and the transmitted power is higher to exploit longer ranges. They are ubiquitous, employed by virtually every navy in the world. Data for U.S. Navy ships suggest that while current MFAS are broadly employed or, rather, deployed and have higher source levels than the original sonars in the first half of the last century, fleet sizes of major navies have been steadily decreasing. Thus, while MFAS are clearly a continuing and important technology for these navies, their contribution to the total sound budget of the

oceans is likely to have declined over the last 70 years. To fully understand the implications of the fleet size and technologies involved as they evolve over time will require more explicit analyses than this basic history provides. However, it does give a perspective for how sonar and its sound parameters have evolved during a time period in which we have also become increasingly aware of marine mammal populations, strandings, and a potential role of human sound impacts in those events.

Acknowledgments

The authors would like to thank F. Martin and E. Harland for their assistance in documenting the history of active sonar. The authors appreciate the assistance of P. Tyack, D. R. Ketten, and R. Gisiner for their input, and they appreciate the helpful comments of the reviewers. The authors acknowledge the Office of Naval Research and OPNAV Environmental Readiness Division (CNO N45) for funding portions of this work.

Literature Cited

- Bjørnø, L. (2003). Features of underwater acoustics from Aristotle to our time. *Acoustical Physics*, 49, 24-30.
- Brownell, J., Robert, L., Yamada, T., Mead, J. G., & van Helden, A. L. (2004, July). *Mass strandings of Cuvier's beaked whales in Japan: U.S. Naval acoustic link?* (Paper SC/56/E37). Presented at the International Whaling Commission Scientific Commission's 56th Annual Meeting, Sorrento, Italy.
- Brownell, R. L., Nowacek, D. P., & Ralls, K. (2008). Hunting cetaceans with sounds: A worldwide review. *Journal of Cetacean Research and Management*, 10, 81-88.
- Burdic, W. S. (1984). *Underwater acoustic system analysis*. Englewood Cliffs, NJ: Prentice Hall.
- Bureau of Naval Personnel. (1953). *Naval sonar*. Retrieved 18 November 2009 from www.hnsa.org/doc/sonar/index.htm.
- Bureau of Ordinance. (1943). *Depth charges: Mark 6, Mark 6 Mod 1, Mark 7, Mark 7 Mod 1, operations and maintenance* (Ordinance Pamphlet 747). Retrieved 18 November 2009 from www.hnsa.org/doc/depthcharge6/index.htm.
- Cote, O. R. (2000). *The third battle: Innovation in the U.S. Navy's silent cold war struggle with Soviet submarines*. Retrieved 18 November 2009 from www.navy.mil/navydata/cno/n87/history/cold-war-asw.html.
- Cowden, A. (2005). *The Naval Institute almanac of the U.S. Navy*. Annapolis, MD: Naval Institute Press.
- Cox, A. W. (1974). *Sonar and underwater sound*. Lexington, MA: D.C. Heath and Company.
- Ellis, R. (1991). *Men and whales*. New York: Alfred A. Knopf.
- Evans, D. L., & England, G. R. (2001). *Joint interim report, Bahamas marine mammal stranding event of 15-16 March 2000*. Washington, DC: U.S. Department of Commerce and Secretary of the Navy.
- Ewing, M., & Worzel, J. L. (1945). *Long range sound transmission, Interim Report No. 1, March 1, 1944-January 20, 1945*. Woods Hole, MA: Woods Hole Oceanographic Institution.
- Federation of American Scientists (FAS). (2009). *Division officer training, ship's silencing program*. Retrieved 18 November 2009 from www.fas.org/man/dod-101/navy/docs/swos/stu2/NEWIS9_7.html.
- Frantzis, A. (1998). Does acoustic testing strand whales? *Nature*, 392, 29.
- Frantzis, A. (2004). The first mass stranding that was associated with the use of active sonar (Kyparissiakos Gulf, Greece, 1996). *European Cetacean Society Newsletter*, 42(Special Issue), 14-20.
- Freitas, L. (2004). The stranding of three Cuvier's beaked whales *Ziphius cavirostris* in Madeira Archipelago – May 2000. *European Cetacean Society Newsletter*, 42(Special Issue), 28-32.
- Friedman, N. (1988). *U.S. Naval weapons: Every gun, missile, mine and torpedo used by the U.S. Navy from 1883 to the present day*. Annapolis, MD: Naval Institute Press.
- Friedman, N. (1989). *The Naval Institute guide to world naval weapons systems*. Annapolis, MD: Naval Institute Press.
- Hackman, W. (1984). *Seek and strike: Sonar, anti-submarine warfare and the Royal Navy, 1914-1954*. London: Her Majesty's Stationary Office.
- Haslett, R. W. G. (1967). Underwater acoustics. *Journal of Scientific Instruments*, 44, 709-719.
- Katz, E. (2005). *Reginald Aubrey Fessenden*. Retrieved 30 November 2009 from <http://chem.ch.huji.ac.il/history/fessenden.html>.
- Keegan, J. (1990). *The price of admiralty: The evolution of naval warfare*. New York: Penguin Group USA.
- Lasky, M. (1977). Review of undersea acoustics to 1950. *Journal of the Acoustical Society of America*, 61, 283-297.
- Martín Martel, V. (2002). *Especial varamiento de cetáceos: Viceconsejería de Medio Ambiente [Stranding of cetaceans: Special-Deputy Ministry for the Environment]*. Las Palmas de Gran Canaria: Government of the Canary Islands. Retrieved 18 November 2009 from www.gobcan.es/medioambiente/varamientos.
- Martín, V., Servidio, A., & García, S. (2004). Mass strandings of beaked whales in the Canary Islands. *European Cetacean Society Newsletter*, 42(Special Issue), 33-36.
- Morgan, J. (2005). *Anti-submarine warfare: A phoenix for the future*. Retrieved 18 November 2009 from www.fas.org/man/dod-101/sys/ship/docs/anti-sub.htm.
- National Research Council (NRC). (1994). *Coastal oceanography and littoral warfare*. Washington, DC: National Academies Press. Retrieved 18 November

- 2009 from http://books.nap.edu/openbook.php?record_id=9240&page=R3.
- NRC. (2003). *Ocean noise and marine mammals*. Washington, DC: National Academies Press.
- Naval weapons of the world from 1880 to today: ASW weapons and mines, ASW weapons*. (2008). Retrieved 18 November 2009 from www.navweaps.com/Weapons/WAMUS_ASW.htm.
- Parsch, A. (2008). *Designations of U.S. military electronic and communications equipment*. Retrieved 18 November 2009 from www.designation-systems.net/usmilav/electronics.html#_JETDS_Misc.
- Payne, C. M. (2006). *Principles of naval weapon systems*. Annapolis, MD: Naval Institute Press.
- Pengelley, R., & Scott, R. (2004). *Lower frequencies ping the littoral ASW threat*. Alexandria, VA: Jane's Navy International. Retrieved 18 November 2009 from <http://jni.janes.com/public/jni/index.shtml>.
- Proc, J. (2005). *ASDIC, RADAR and IFF systems used by the RCN – WWII and post war*. Retrieved 18 November 2009 from www.jproc.ca/sari.
- Richardson, W. J., Greene, C. R., Jr., Malme, C. I., & Thomson, D. H. (1995). *Marine mammals and noise*. San Diego: Academic Press.
- Ross, D. (1976). *Mechanics of underwater noise*. Elmsford, NY: Pergamon Press.
- Scott, R. (2000, November). Sounding-out the littoral challenge. *Jane's Defence Weekly*, 34(21), 20-24.
- Space and Naval Warfare Command. (1996). *Critical sea test: Final report 1996*. Alexandria, VA: National Technical Information Service.
- Tyler, G. D. (1992). The emergence of low-frequency active acoustics as a critical antisubmarine warfare technology. *John Hopkins APL Technical Digest*, 13, 145-159.
- Urick, R. J. (1983). *Principles of underwater sound*. Los Altos, CA: Peninsula Publishing.
- U.S. Department of the Navy (U.S. DoN). (1993). *Department of the Navy policy paper "From the sea" update, Joint Operations*. Washington, DC: The Navy Public Affairs Library. Retrieved 18 November 2009 from www.navy.mil/navydata/policy/fromsea/ftsujto.txt.
- U.S. Naval History and Heritage Command. (2009). *U.S. Navy active ship force levels, 1917-present*. Retrieved 18 November 2009 from www.history.navy.mil/branches/org9-4.htm#top.
- Watter, A. J. (Ed.). (2004). *Jane's underwater warfare systems*. Retrieved 18 November 2009 from www.janes.com.
- Whitman, E. C. (2005, Winter). SOSUS, the "secret weapon" of undersea surveillance. *Undersea Warfare*, 7(2). Retrieved 18 November 2009 from www.navy.mil/navydata/cno/n87/usw/issue_25/sosus.htm.

Appendix*Glossary of terms*

ASDIC	Allied Submarine Detection Investigation Committee – Echo-ranging system named for the international committee that invented it
ASROC	Anti-submarine rocket
ASW	Anti-submarine warfare
Acoustic Paths (as defined in Cox, 1974)	
Direct Path (DP)	Straight line path direct from source to detector
Bottom Bounce (BB)	Sound path utilizing sound energy either beamed or bent toward the ocean bottom that results in energy reflected off the ocean bottom
Convergence Zone (CZ)	Sound path in deep water through which the sound energy for the source is refracted or bent downward from the source as a result of decreasing temperature until the increase in pressure bends the sound rays upward
Active (Sonar)	Echo-ranging system that transmits sound waves and receives reflections
Bi-static	Active sonar system in which the transmitter/source is separate from the receiver
FRAM	Fleet Rehabilitation And Modernization
Hull Mounted	Sonar transducers attached to the underwater hull of surface ships
LFAS	Low-Frequency Active Sonar
kHz	Kilo Hertz – Frequency measured in thousands of cycles per second
MFAS	Mid-Frequency Active Sonar
MFA	Same as MFAS
NURC	NATO Underwater Research Center
NUSC	Naval Undersea Systems Center
NUWC	Naval Underwater Weapons Center
NRL	Naval Research Laboratory
Passive (Sonar)	Acoustic system that senses noise/signals emanating from targets
Pulse Length	Duration of individual sonar transmissions
RDT	Rotational Directional Transmissions
SONAR	SOund Navigation and Ranging
SOSUS	SOund SURveillance System
Source Level	Pressure level of the radiated sound that would be measured from the acoustic center from an ideal source radiating the same amount of sound as the actual source being measured – In water, this is measured in dB re 1 μ Pa at 1 m (Ross, 1976).
SURTASS	Surveillance Towed Array Sensor System
SURTASS LFA	Surveillance Towed Array Sensor System Low Frequency Active
AN/SQS	Army Navy S (surface ship) Q (underwater) S (search and track)
The Third Battle	The name for the bloodless Allied ASW effort against the Soviet submarine fleet; also refers to previous battles of the Atlantic in which the German U-boat raised havoc with Allies during World War I and World War II
TNT	Tri-nitro-toluene – Explosive
Transducer	The part of a sonar system that converts electrical signals to acoustic signals and the reverse
VDS	Variable Depth Sonar

Copyright of Aquatic Mammals is the property of Aquatic Mammals and its content may not be copied or emailed to multiple sites or posted to a listserv without the copyright holder's express written permission. However, users may print, download, or email articles for individual use.