UNCLASSIFIED

AD NUMBER AD343703 **CLASSIFICATION CHANGES** TO: unclassified confidential FROM: **LIMITATION CHANGES** TO: Approved for public release, distribution unlimited FROM: Controlling DoD Organization: Assistant Chief of Staff for Force Development [Army], Washington, DC 20310. **AUTHORITY** OACSFOR D/A ltr dtd 13 Sep 1973; OACSFOR

D/A 1tr dtd 13 Sep 1973

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



CONFIDENTIAL

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTICE:

THIS DOCUMENT CONTAINS INFORMATION
AFFECTING THE NATIONAL DEFENSE OF
THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 12,
U.S.C., SECTIONS 73 and 734. THE
TRANSMISSION OR THE REVELATION OF
ITS CONTENTS IN ANY MANNER TO AN
UNAUTHORIZED PERSON IS PROHIBITED
BY LAW.

ARMY CONCEPT TEAM IN VIETNAM APO 143, San Francisco, California



ACTIV-CH

(M113) (U)

343703

AD No. DEC FILE COPY

(7 MONTHLY TEST REPORT, NUMBER 5,

1-30 June 4763,

100x1 Defens Expt 70x1 it by 100

. . tonal

This page is UNCLASSIFIED when separated from classified inclosures



CONFIDENTIAL

ARMY CONCEPT TEAM IN VIETNAM APO 143, San Francisco, California

ACTIV-GM

13 August 1963

SUBJECT: Monthly Test Report Number 5 -- Mechanized Rifle Troop (Mll3) (1 - 30 June 1963) (U)

TO: See Distribution

1. (C) General

Missions performed by mechanized rifle troops during the reporting period were static in nature and consisted primarily of route and area security. Therefore this report contains only a discussion of logistical problems encountered (Incl 1) and projected study items (Incl 2).

A description of the test units, discussion of test objectives and operational plan of test are contained in previous monthly test reports.

Previous estimates of 95 percent test completion remain unchanged.

2. (C) References

a. DA letter, AGAM-P(M) 381 (31 Oct 62) DCSOPS, subject: "Army Troop Test Program in Vietnam (U)," 6 November 1962, as amended.

b. ACTIV letter (to CGUSACDC), subject: "Plan of Test, Mechanised Rifle Troop (M113) (U)," 28 November 1962.

c. ACTIV letter (to CINCPAC through COMUSMACV), subject: "Summary of Test Plan for Mechanized Rifle Troop (Mll3) (U)," 3 December 1962.

d. CINCPAC message, subject: "Proposal for US Army Tests in Vietnam", DTG 220216Z (January 1963).

e. Monthly Test Reports Numbers 1 through 4 - Mechanised Rifle Troop (Mll3), Army Concept Team in Vietnam.

2 Inclosures

THOMAS O. BLAKENEY
Colonel, Armor

Chief

DISTRIBUTION:	MR. OF COPIES
Commander, US Military Assistance Command, Vietnam	15
Commander-in-Chief, US Army Pacific	5
Commanding General, US Army Combat Developments Command	50
Commanding General, US Continental Army Command	30
Commanding General, US Material Command	35
Commanding General, 11th Air Assault Division	5
Commanding General, US Army Support Group, Vietnam	20 (included 5 for CO USARYIS)
Chief, Military Assistance Advisory Group, Vietnam (Attention Chief, Army Section)	35
Deputy Chief of Staff for Military Operations, Department of the Army	5
Assistant Chief of Staff for Force Development, Department of the Army	10
Deputy Chief of Staff for Logistics, Department of the Army	5
Deputy Chief of Staff for Personnel, Department of the Army	5
Chief of Research and Development, Department of the Army	5
ACTIV Limison Officer, OACSFOR, Department of the Army	10

LOGISTICAL SUPPORT REQUIREMENTS

1. (C) General

This discussion addresses itself to Objective Number 3 of the test plan which is "To determine the logistical support requirements for units and individual vehicles when operated in a counterinsurgency role in the Republic of Vietnam."

2. (C) Discussion

a. Maintenance

- (1) First echelon maintenance continues to be outstanding in all units. Second and third echelon maintenance have been performed effectively. Due to the relatively small number of combat operations, units have had an opportunity to check and maintain their vehicles thoroughly during this period.
- (2) Major assembly failures continue to be low. A spot inspection of 15 vehicles with a 5000 mile average indicates that an engine rebuild program may be needed in the near future. The necessary repair parts for such a program have been ordered. It is hoped that these engines can be rebuilt on an "as needed" basis and replaced in vehicles by float engines. This would keep the fleet entirely operational while the engine rebuild is being conducted. Only the vehicles in the Mekong Delta region (IV Corps) fall into this high mileage category. Vehicles in the other corps areas evidence considerably less mileage.
- (3) The following major maintenance problems were noted during the period:
- (a) Ignition Coils FSN 2920-324-0371. This coil has been failing in large numbers and is currently in an "out-of-stock" position. As a field expedient, M-24 tank coils and 3/4-ton truck coils are being substituted satisfactorily. These items do not fit the same distributor case as the prescribed coil, and are wired to the engine and through the distributor for satisfactory operation.
- (b) Rectifier FSN 6130-314-0545. This component has been failing on vehicles with high mileage (approximately 5500 miles). The cause of failure is unknown. Five vehicles are presently deadlined for lack of this component.
- (4) One ARVN Mechanised Rifle Troop wants to perform the scheduled 2nd echelon engine maintenance (Q-Check) according to hours of engine operation rather than quarterly or mileage. This desire stems from experience during many of the operations when up to 90 percent of the engine running time is spent at the idle. The Army Tank-Automotive Center, Detroit, has been contacted in this regard.

b. Supply

- (1) Supply of repair parts continues to be on a "hand-to-mouth" basis. Requisitions for all critical items have been placed with the Logistical Center, Japan, and positive action has been taken to build adequate stocks in consonance with forecast usage rates. The following parts are in critical stock position:
 - (a) Starter FSN 2920-704-1708
 - (b) Shock Absorber -- FSN 2540-714-6156
 - (e) Ignition Coil FSN 2920-324-0371
 - (d) %egulator FSN 2920-540-9476

Inclosure 1

- (e) Switch, fuel, interlock FSN 5930-771-8119
- (f) Switch, engine, start FSN 2920-714-6128
- (g) Belt, generator, drive FSN 3030-676-8945
- (h) Radiator FSN 2930-679-9748
- (1) Hose FSN 4720-679-9771
- (j) Rectifier FSN 6130-314-0545
- (2) Replacement track has arrived in sufficient quantity to overcome the problem reported in previous ACTIV reports.

3. (C) Findings

- a. First echelon maintenance is outstanding.
- b. The current lull in operations has allowed the units to perform thorough maintenance checks.
 - c. An engine rebuild program will be initiated in the near future.
- d. Ignition coils and rectifiers constitute the most significant maintenance problems during the reporting period.
- e. ARVN desires to perform quarterly engine and maintenance checks according to hours of operation.
 - f. Supply continues to be in a critical position.

Page 2 Inclosure 1

PROJECTED STUDY ITEMS

The following items are projected for study and inclusion in future reports pertaining to the Armored Personnel Carrier, M113.

1. (C) Canatans and Ground Anchors

The capetans shown in Annex E, "Monthly Test Report Number 2 - Mechanised Rifle Troop (M113)" have arrived in the Republic of Vietness for testing. These capetans will be used as a self recovery device to assist in canal crossings. Auger type ground anchors will be used with the capetans when natural anchors such as trees are not available. (See figure 1.) Hylon rope will be used to provide the tensile strength required and save weight.

2. (C) 30 Caliber Machine Gun Cupolas

Four enclosed caliber .30 machine gun cupolas have been mounted on the M113 for test in the RVM (See figures 2 through 5). This cupola will afford added protection for the gunner. Although this cupola "down-guns" the M113, many in Vietnem feel that this weapon will be superior to the caliber .50 machine gun for the short periods of enemy contact common to counter-insurgency war.


This cupola is a modified version of that found on the Mavy LVTP-5. It has been enthusiastically received in Vietnem because it affords a very stable firing platform with a simple mechanical design. The functional worth of this device will be discussed in future reports.


3. (U) Push Bars

An A-frame type "push bar" has been locally fabricated for test. (See figure 6.) The "pushing" method of crossing small, shallow, steepbanked canala has proved to be one of the most successful methods. The results of this testing will be discussed in future reports.

4. (C) .30 Caliber Machine Gun Mount

Caliber .30 machine gun mount - A request for a channeled adapter to mount a caliber .30 machine gun on the left or right side of the cargo hatch has been forwarded to the Combat Developments Command. This will allow maximum ambush protection and provide a capability of saturating insurgent positions with fire during contact. (See figure 7.)

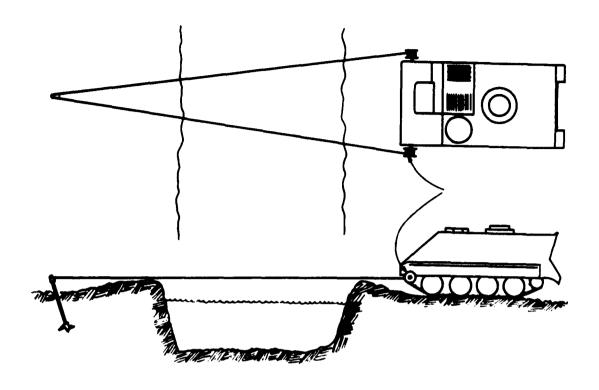

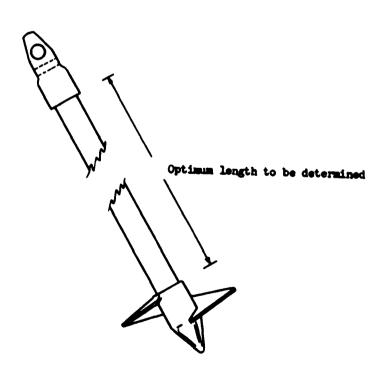

PIGURE 1 AUGR-TYPE GROUND ANCHOR


For Use With Capstan in Mil3 Self-Recovery Operations



PIGURE 2
MODIFIED NAVY LVTP-5 CUPOLA MOUNTED ON
M113 (FRONT VIEW)



PIOURE 3 MODIFIED NAVY LATE-5 CUPOLA MOUNTED ON ML13 (SIDE-VIEW)

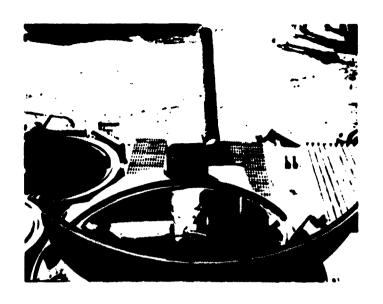

PIGURE 4 MODIFIED NAVY LVTP-5 CUPOLA MOUNTED ON MIN (TOP-VIEW)




PIGURE 5
MODIFIED NAVY LYTP-5 CUPOLA HOUNTED ON
M113 (INSIDE VIEW SHOWING MONOCULAR
SIGH 'N. 'V. HER .30 MACHINE GUN)



FIGURE 6
LOCALLY FABRICATED A-FRALE "PUSH BAR"

This device mounts on towing pintles on the front of the M113. Height of adjustment is controlled by chains fastened to lifting eyes. Contact shoe is connected to the A-frame by semi-articulating linkage which allows maximum shoe surface contact.

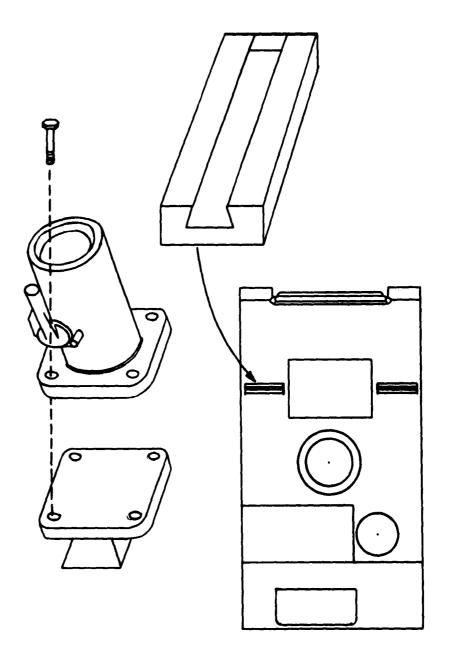

Pigure 7
CHANNELED ADAPTOR FOR HOUNTING CALIBER .30 MACHINE GUN ON SIDE OF M113 CARGO HATCH