

UNCLASSIFIED

AD 404 582

*Reproduced
by the*

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION, ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY ASTIA

AS AD NO. 404582

HYDROGEN GENERATION FOR FUEL CELLS

REPORT No. 3

THIRD
QUARTERLY REPORT
FOR THE PERIOD

1 NOVEMBER 1962 - 31 JANUARY 1963

U. S. ARMY ELECTRONICS
RESEARCH AND DEVELOPMENT LABORATORY
FORT MONMOUTH, NEW JERSEY

CONTRACT NO. DA 36-039 SC-89077

Task No. 3A99-09-002-03

404 582

ENGELHARD

I N D U S T R I E S , I N C.

PROCESS EQUIPMENT DIVISION
NEWARK, N.J.

NO OTS

**ASTIA AVAILABILITY NOTICE
QUALIFIED REQUESTORS MAY OBTAIN COPIES
OF THIS REPORT FROM ASTIA
ASTIA RELEASE TO OTS NOT
AUTHORIZED**

HYDROGEN GENERATION
FOR FUEL CELLS

REPORT No. 3

Contract No. DA 36-039 SC-89077

Task No. 3A 99-09-002-03

Third

QUARTERLY REPORT

1 November 1962 - 31 January 1963

U. S. ARMY ELECTRONICS

RESEARCH AND DEVELOPMENT LABORATORY

Object: To conduct investigations on the conversion of primary fuels to hydrogen for use as a fuel in primary fuel cell batteries.

Written By *E. J. Emerson*
E. J. Emerson

Israel Kantowitz
I. Kantowitz

H. H. Geissler
H. H. Geissler

Approved By *G. Conn*
G. Conn

R. B. Green
R. B. Green

Engelhard Industries, Inc.
Process Equipment Division
Newark, New Jersey

TABLE OF CONTENTS

	<u>Page</u>
Title Page	i
Table of Contents	ii
List of Tables and Figures	iii
I. Purpose	1
II. Abstract	2
III. Publications, Lectures, Reports and Conferences	3
IV. Factual Data	4
A. Ammonia as a Fuel for Hydrogen Generators	4
1. Experimental Apparatus	4
2. Generator Performance	4
3. Ammonia Feed System	6
a. Ammonia Vaporizer	6
b. Ammonia Separation	6
B. Hydrocarbon as a Fuel for Hydrogen Generation	7
1. Emulsifiers	7
2. Process	7
V. Conclusions	8
VI. Program for Next Interval	9
VII. Identification of Key Technical Personnel and Distribution of Hours	10
Appendix A - Tables	11
Appendix B - Figures	15
Abstract Cards	
Distribution List	

LIST OF TABLES

<u>No.</u>	<u>Title</u>	<u>Page</u>
1	Data for Ammonia Fuel	12
2	Data for Ammonia Fuel	13
3	Emulsifier Screening Tests	14

LIST OF FIGURES

	<u>Title</u>	
1	Schematic Flow Diagram, Test Set-up, Typical	16
2	Schematic Flow Diagram, Test Set-up, Special	17
3	Temperature Profile	18
4	Temperature Profile	19
5	Temperature Profile	20
6	Temperature Profile	21
7	Ammonia Container	22

I. PURPOSE

The work undertaken in this contract consists of investigations to develop a method of generating hydrogen from primary fuels in such a manner that the generation of the hydrogen and its separation from other reaction products can be accomplished easily in the field on a portable basis.

An experimental generator is to be designed and fabricated with the necessary reactants to produce 0.25 pounds of hydrogen distributed over a 12-hour period. The device, including fuel for 12 hours' operation, is not to exceed 15 pounds in weight or a 2-cubic foot volume.

Ammonia and hydrocarbons are to be investigated with an attempt to secure fuel cell operation at a primary fuel cost of approximately 20 mils/KWH.

The experimental generator must be easily adaptable to integration with a 200 watt, 28 volt hydrogen-oxygen fuel cell battery.

II. ABSTRACT

Test operations were continued during the third quarter with portable hydrogen generators utilizing ammonia as the fuel. Continued investigations have shown that the design requirement of 4 SCFH of hydrogen can be produced utilizing residual hydrogen to supply the process energy requirements. Repeated start ups and shutdowns have been accomplished. It is projected that a complete assembly incorporating a slightly modified version of these generators will meet the over-all volume and weight specifications.

Tests have confirmed that the waste stack gas could be utilized to provide the heat of vaporization to the ammonia container to maintain the ammonia vapor at a pressure sufficient to operate the generator. Refinement of the heat exchanger and controls still has to be engineered.

With a view to equipment simplification through elimination of a second feed stream suitable mixtures of water and JP-4 have been emulsified by simple shaking with an emulsifier.

III. PUBLICATIONS, LECTURES, REPORTS AND CONFERENCES

Conferences were held on November 15, 1962, at the Research and Development Division and the Process Equipment Division of Engelhard Industries, Inc., attended by Lt. F. R. Franke and Technical personnel of the contractor. The development work of the second quarter and the status of the present efforts were discussed.

A conference was held on January 24, 1963, at the Process Equipment Division of Engelhard Industries, Inc., attended by Dr. H. F. Hunger and Lt. F. R. Franke and Technical personnel of the contractor. The work completed at this time was discussed.

IV. FACTUAL DATA

A. Ammonia as a Fuel for Hydrogen Generators

1. Experimental Apparatus

The test generators and associated equipment were arranged as shown in the schematic flow diagram - Typical Test Setup, Figure 1. For the tests to confirm the feasibility of the stack gas to warm the ammonia supply, the equipment was arranged as shown in the schematic flow diagram - Test Setup, Figure 2.

2. Generator Performance

Operation of test reactor PT-3, which went on stream during the second quarter, was continued to secure life and performance data. The apparatus was arranged as shown in Figure 1. Operation was on a daily basis, 8 hour on-16 hour off cycle, with complete cooling in the off period. The generator failed during the 21st cycle. A leak of process gas into the pure hydrogen stream developed due to thermal expansion stresses.

During the period of testing PT-3, a modified test generator for producing H₂ from ammonia designated PT-5 was designed and built. This generator was designed without a heat distributor such as used in PT-3. Instead, it utilized a heavier walled combustion section to distribute the heat. The reaction zone had the same volume as previous generators but was shorter in length in an effort to minimize the over-all equipment height. Feed gas flow was parallel to stack gas flow.

For initial tests of PT-5, spherical rather than granulated catalyst was selected to minimize the problem of fines in the system. The generator developed a leak, during the second cycle, between the reactor gas and the pure product hydrogen. Operation was continued without hydrogen removal in order to check the temperature profile and compare the catalyst activities. Test data indicated

that the particular catalyst used initially was not sufficiently active to promote complete dissociation of the ammonia under the reactor conditions used. The larger mass of the combustion chamber wall increased the start up time of the generator. In this generator, the residual fuel off gas was conducted to the aspirator assembly at a higher temperature than previously. This higher temperature reduced the flow rates of both the residual gas and the aspirated air.

The generator then was disassembled and the leak (mentioned above) was found to be at the weld of a flange to the combustion chamber. Since the defect developed at the junction between two components and not in a component itself, we conclude that the materials of construction of the generator are now sufficiently rugged and that the remaining problem is one of assembly techniques. The generator was modified and reassembled, with the feed gas flow now countercurrent to the stack gas flow. The generator was operated again to check start up times and the reactor performance. The catalyst was changed to one which under comparable conditions proved to be more active.

Typical test data are shown in the Test Data for Ammonia Fuel, Table 1. Typical temperature profiles for PT-3, PT-5 parallel flow, and PT-5 countercurrent flow are shown in Figures 3, 4, and 5, respectively. The temperature distribution curves shown on Figures 3, 4 and 5, show that all points of the systems studied the temperatures were within the range required for proper operation of the generator.

With countercurrent flow, the generator was better than with parallel flow in regard to start up and operating characteristics. Nevertheless, this generator still did not compare as favorably to the design requirements as did prototype PT-3. Consequently, we constructed a new generator, designated PT-3A, in which were combined the improved mechanical features of PT-5 and the attractive operating characteristics of PT-3. This unit has so far been operated successfully through 10 cycles as shown in Table 2. During these cycles, the unit was self-sustaining and met the design requirements.

3. Ammonia Feed System

In this work period, attention has been given to the problem of feeding the ammonia vapor into the generator reliably under a variety of ambient conditions. This requires provisions to supply the heat of evaporation to the ammonia feed vessel and, furthermore, it would be desirable to incorporate a device separating the ammonia vapor from the liquid so that only vapors will enter the generator regardless of attitude.

a. Ammonia Vaporizer

During several tests on PT-5, the equipment was arranged as shown in Figure 2. The stack gas was conducted through a coil which surrounded a small ammonia container, five-inch diameter by seven inches long. The container and coil were lightly insulated.

The generator was operated at design conditions producing 4 SCFH of hydrogen on a self-sustaining basis while drawing ammonia vapor from the small container which was receiving the heat for vaporization from the waste stack gas. Temperature of the liquid in the ammonia container was maintained at slightly above room temperature.

This same test was successfully repeated several times using PT-3 generator.

b. Ammonia Separator

A teflon coated ceramic candle with a 1.4 micron porosity was mounted as shown in Figure 7. The container was filled to approximately 70% of capacity with anhydrous ammonia. With the container in a vertical position (candle at top), the outlet valve was opened and vapor discharged satisfactorily. The container was then inverted so that the candle was completely immersed in the liquid and the outlet valve opened. Ammonia liquid was discharged immediately.

In both tests, the discharge was to atmospheric pressure with a correspondingly large pressure drop across the candle. It is planned to check the scheme further and test the operation when the pressure drop across the filter is minimized. Additional testing will also be done to further explore the possibility of operating with a partially flooded candle.

B. Hydrocarbon as Fuel for Hydrogen Generation

1. Emulsifiers

For a small generator, as required by the present specifications, it might be simpler to have a single fluid feed to the generator instead of two separately metered and proportioned feeds. Investigations on hydrocarbon fuels have shown that it is possible to employ liquid hydrocarbons, such as JP-4 jet fuel, and water, as feed material to a hydrogen generator. Experiments have been carried out with emulsifiers for the JP-4/water system in suitable ratios. A summary of various emulsifier systems which have been screened is given in Table 3. These tests were performed with at least one part emulsifier per four parts of oil. The only agitation utilized in these experiments was simple hand shaking.

A review of the screening tests indicated that both 9D-208 and Petromix 10 were successful in securing a stable emulsion. However, only 9D-208 was successful when the proportion of emulsifier was reduced. To date, 9D-208 has formed a stable emulsion (greater than 48 hours) with the JP-4/water system in proportions as low as one part emulsifier per 16 parts of oil.

2. Process

No process studies of liquid hydrocarbon fuel have been carried out during the Third Quarter with funds provided by this contract.

V. CONCLUSIONS

Several versions of an ammonia fueled hydrogen generator have been constructed, tested and operated to failure. All failures have been of a mechanical nature. By analyses of test operations and these failures, it has been possible to arrive at a mechanical and process design which appears sound and capable of being engineered into a practical unit.

Operational tests of prototype generators have continued to demonstrate the feasibility of obtaining 4 SCFH of hydrogen utilizing the residual off-gas as fuel.

The waste stack gas from the generator can be utilized, by heat exchanger, to provide the heat necessary to vaporize liquid at a rate to keep the generator operating on a self-sustaining basis.

VI. PROGRAM FOR NEXT INTERVAL

It is planned to finalize and optimize the design of the ammonia fueled portable hydrogen generator. Minimum weight, volume and start up times will be continued objectives. The operation of the aspirator and igniter system will be monitored for possible improvement. The method of heat transfer to provide the heat of vaporization to the ammonia container will be investigated further together with the necessary control system.

Work will be continued to investigate possible methods of vapor-liquid separation in the ammonia container in conjunction with heat transfer developments.

For the particular size and application of a hydrogen generator, methanol is an attractive fuel and it is intended to begin investigations of the process conditions and equipment design for a unit using methanol as the feed stock.

We expect to continue work with emulsified mixtures of water/hydrocarbon and to observe the behavior of such mixtures and the effects of emulsifier additives in a generator.

VII. IDENTIFICATION OF KEY TECHNICAL PERSONNEL
AND DISTRIBUTION OF HOURS

The following technical personnel have been working on the hydrogen generator for the quarter:

	<u>Hours</u>
Mr. D. J. Accino	10
Mr. E. J. Emerson	266
Mr. H. H. Geissler	68
Mr. L. Kantrowitz	482
Mrs. R. Rylander	8
Technicians	1890

APPENDIX A

Tables

TABLE 1

SUMMARY OF DATA FOR AMMONIA FUEL

Portable Hydrogen Generator

Reactor Designation	Cycle No.	Product H ₂ (SCFH)	Total H ₂ in Prod. (SCFH)	Ammonia Feed (SCFH)	% H ₂ in Fuel Gas	Mat'l. Eff. (lb H ₂ /lb NH ₃)	Therm. Eff.* (GHV H ₂ /GHV NH ₃)
PT-3	13	4.2	7.4	4.9	57.1	0.099	62.9
	16	4.0	7.2	4.8	57.1	0.097	61.6
	20	4.3	7.2	4.8	54.7	0.104	66.0
PT-5 (Parallel Flow)	2	1.9	6.2	4.1	68.3	0.054	34.3
PT-5 (Counter-current Flow)	2	3.8	7.8	5.2	60.6	0.085	54.0
	3	4.0	7.95	5.3	59.8	0.088	56.9
	4	3.5	6.6	4.4	58.5	0.092	58.4

* Thermal Efficiency = Gross Heating Value Product H₂/Gross Heating Value NH₃

TABLE 2

SUMMARY OF DATA FOR AMMONIA FUEL

Portable Hydrogen Generator--PT-3A

Cycle No.	Product H ₂ (SCFH)	Total H ₂ in Prod. (SCFH)	Ammonia Feed (SCFH)	% H ₂ in Fuel Gas	Mat'l. Eff. (lb H ₂ /lb NH ₃)	Therm. Eff.* (GHV H ₂ /GHV NH ₃)
1	4.5	7.6	5.05	55.4	0.103	65.4
3	4.7	8.1	5.4	55.7	0.101	64.1
6	4.8	8.55	5.7	56.8	0.098	62.2
8	4.5	7.8	5.2	55.9	0.100	63.5
10	4.4	7.35	4.9	54.6	0.104	66.0

* Thermal Efficiency = Gross Heating Value Product H₂/Gross Heating Value NH₃

TABLE 3
EMULSIFIER SCREENING TESTS (1)

<u>Emulsifier System</u>	<u>Commercial Source</u>	<u>Results</u>
Tergitol 7	Union Carbide	Complete Separation
" 14	" "	" "
" NP-27	" "	" "
" NPX	" "	" "
Tergitol 14+ Tergitol NP-27	" "	" "
" 14+ " NPX	" "	" "
" NP-27+ " NPX	" "	" "
Triton X- 45	Rohm and Haas	" "
" X-100	" "	" "
" GR-7	" "	" "
Triton 45+)	" "	Stable
" 100+) Mixture	" "	for
" GR-7)	" "	Few Hours
Triton N-57	" "	Complete Separation
9D-208	" "	Stable for 100 Hours
Petromix 10	Sonneborn Corp.	Stable for 100 Hours
Petronate HL	" "	Complete Separation

(1) These emulsifiers were selected after contacting various companies and reviewing their recommendations in regard to the conditions and requirements of a successful emulsion.

APPENDIX B

Figures

FIG. 1
SCHEMATIC FLOW DIAGRAM
TEST SET UP TYPICAL
EXPERIMENTAL PORTABLE H₂ GENERATOR
AMMONIA FUELED

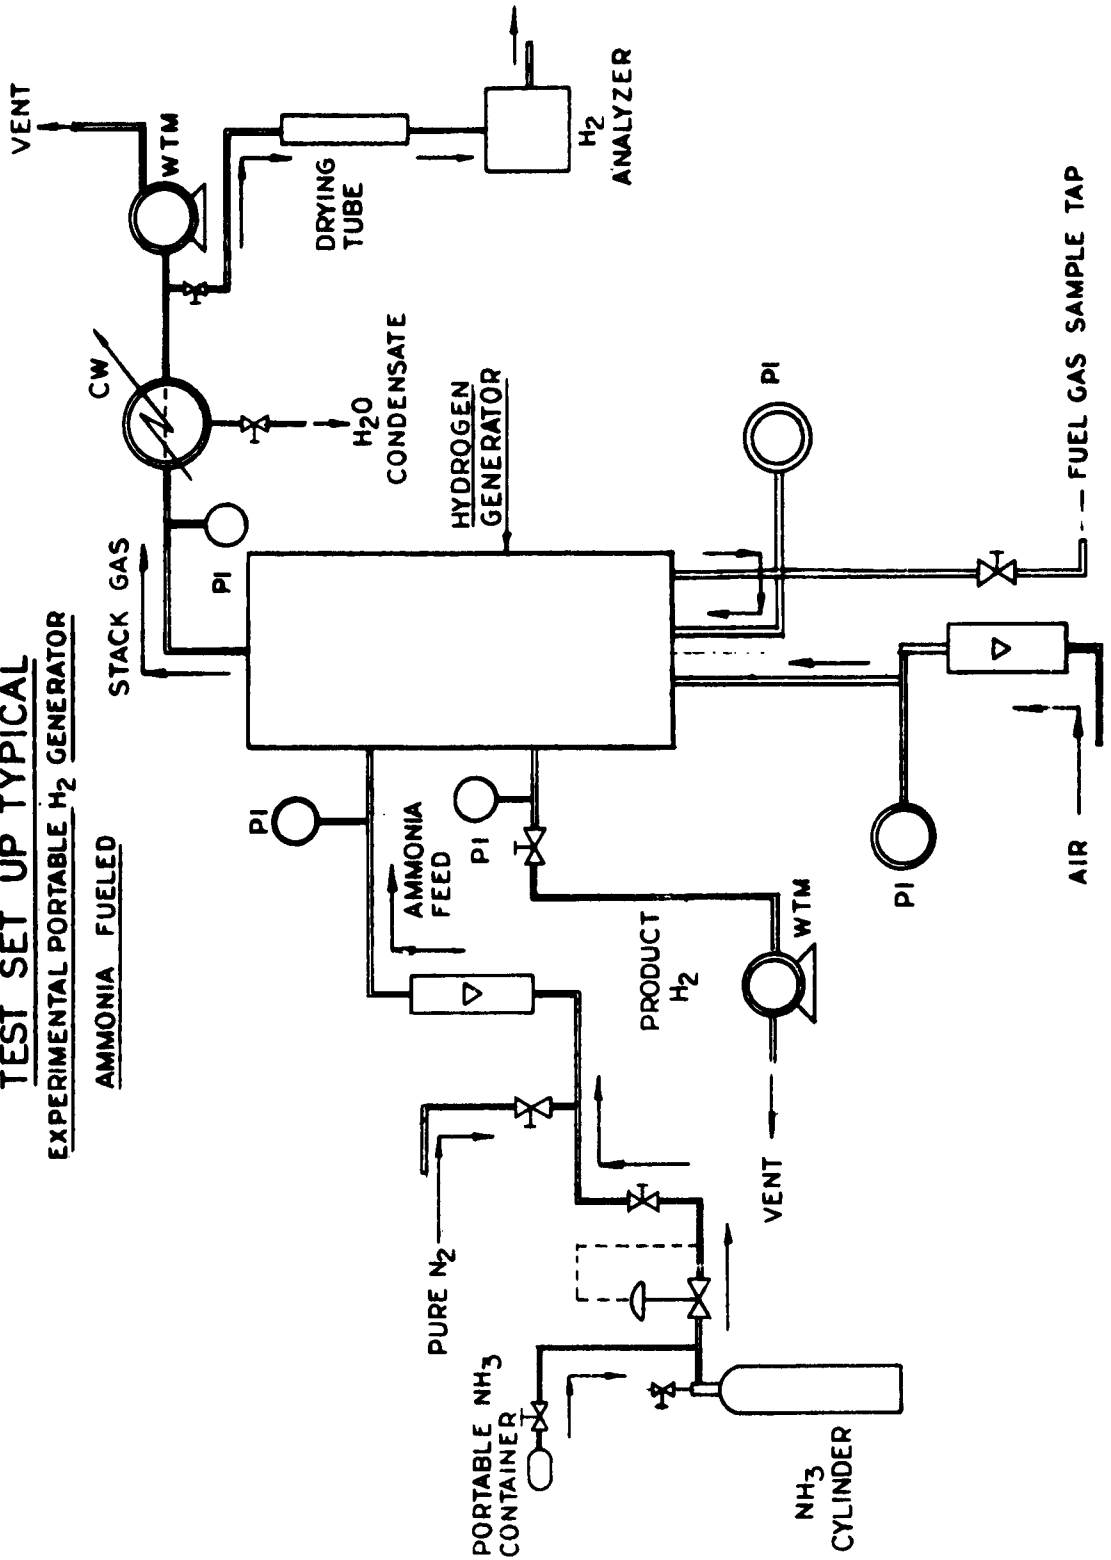


FIG. 2
SCHEMATIC FLOW DIAGRAM
TEST SET UP SPECIAL


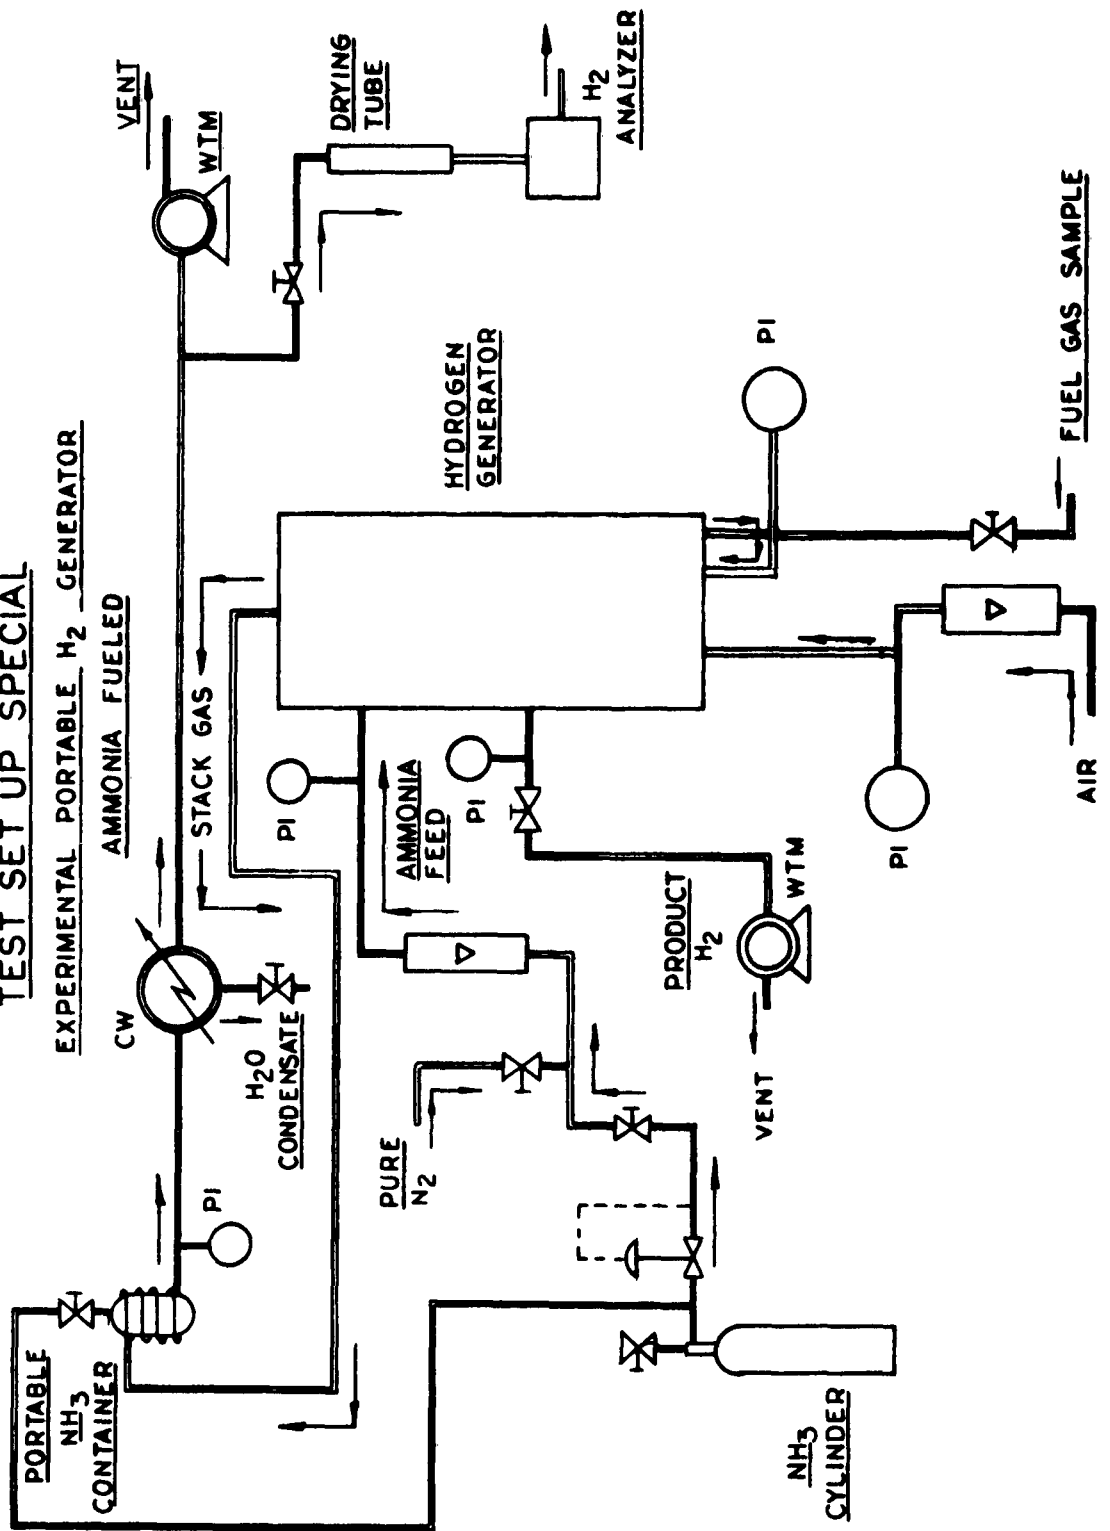


FIG. 3
TEMPERATURE PROFILE
PORTABLE H₂ GENERATOR
PT-3

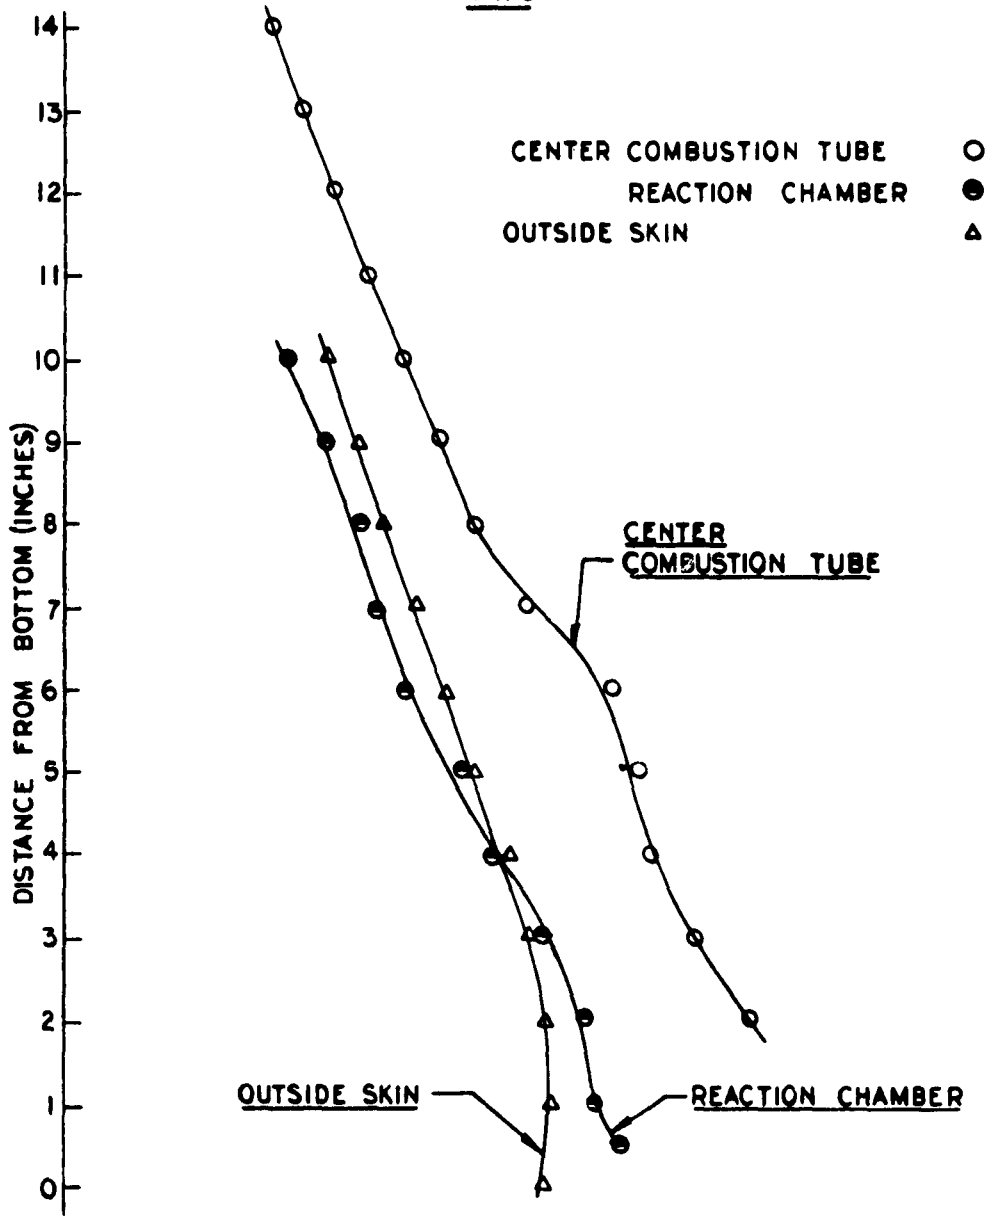

400 600 800 1000 1200 1400 1600 1800 2000
 (TEMP. °F)

FIG. 4
TEMPERATURE PROFILE
PORTABLE H₂ GENERATOR
PT-5

PARALLEL FLOW


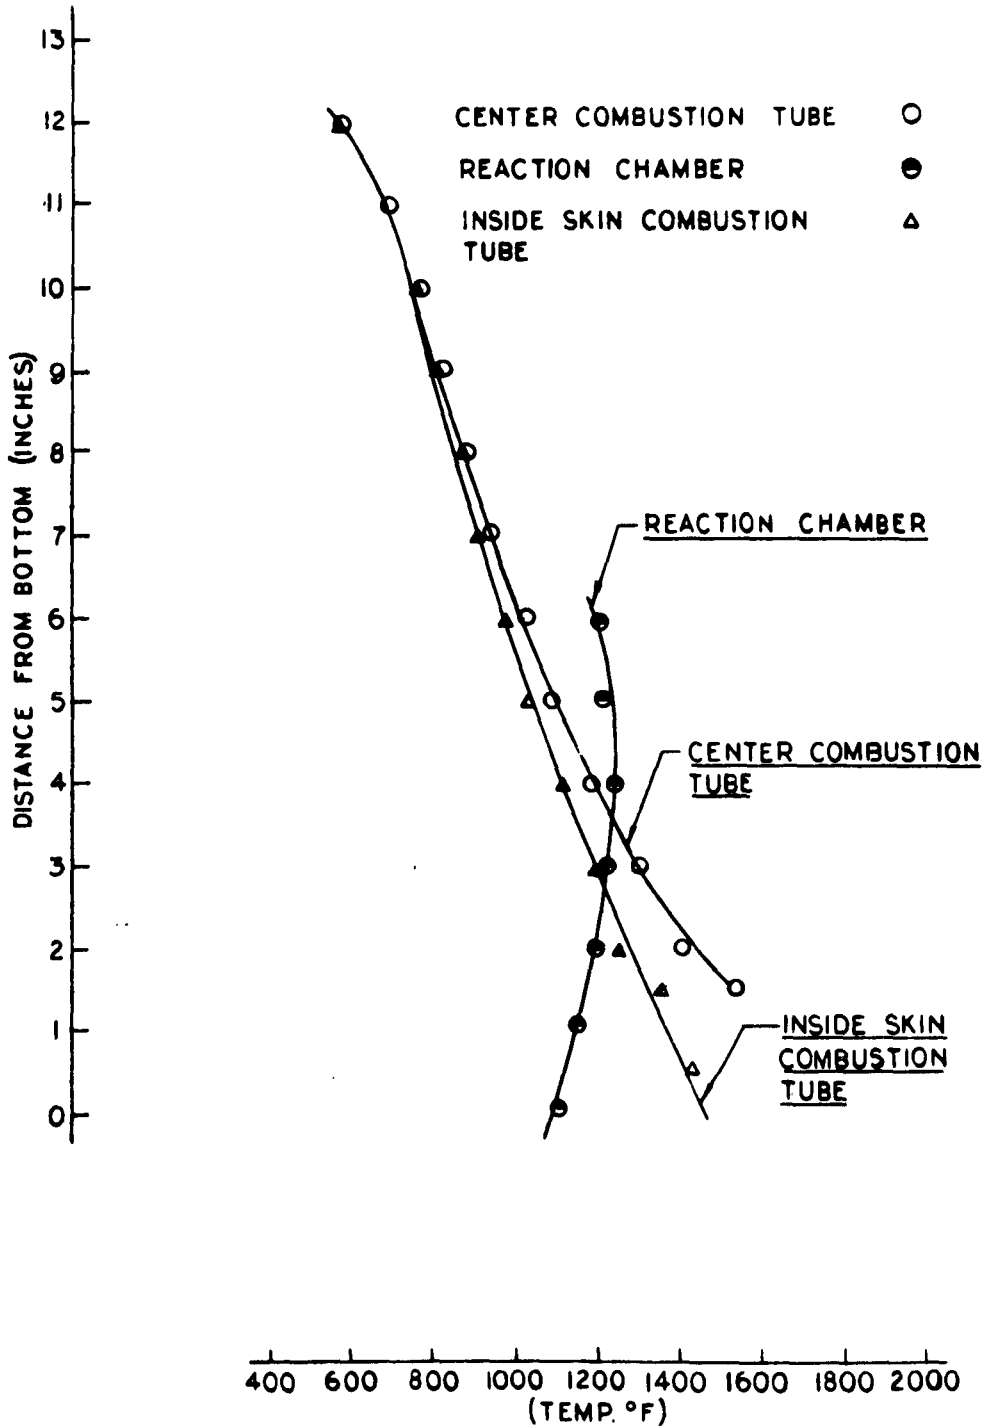


FIG. 5
TEMPERATURE PROFILE
PORTABLE H₂ GENERATOR
PT.-5
COUNTERCURRENT FLOW

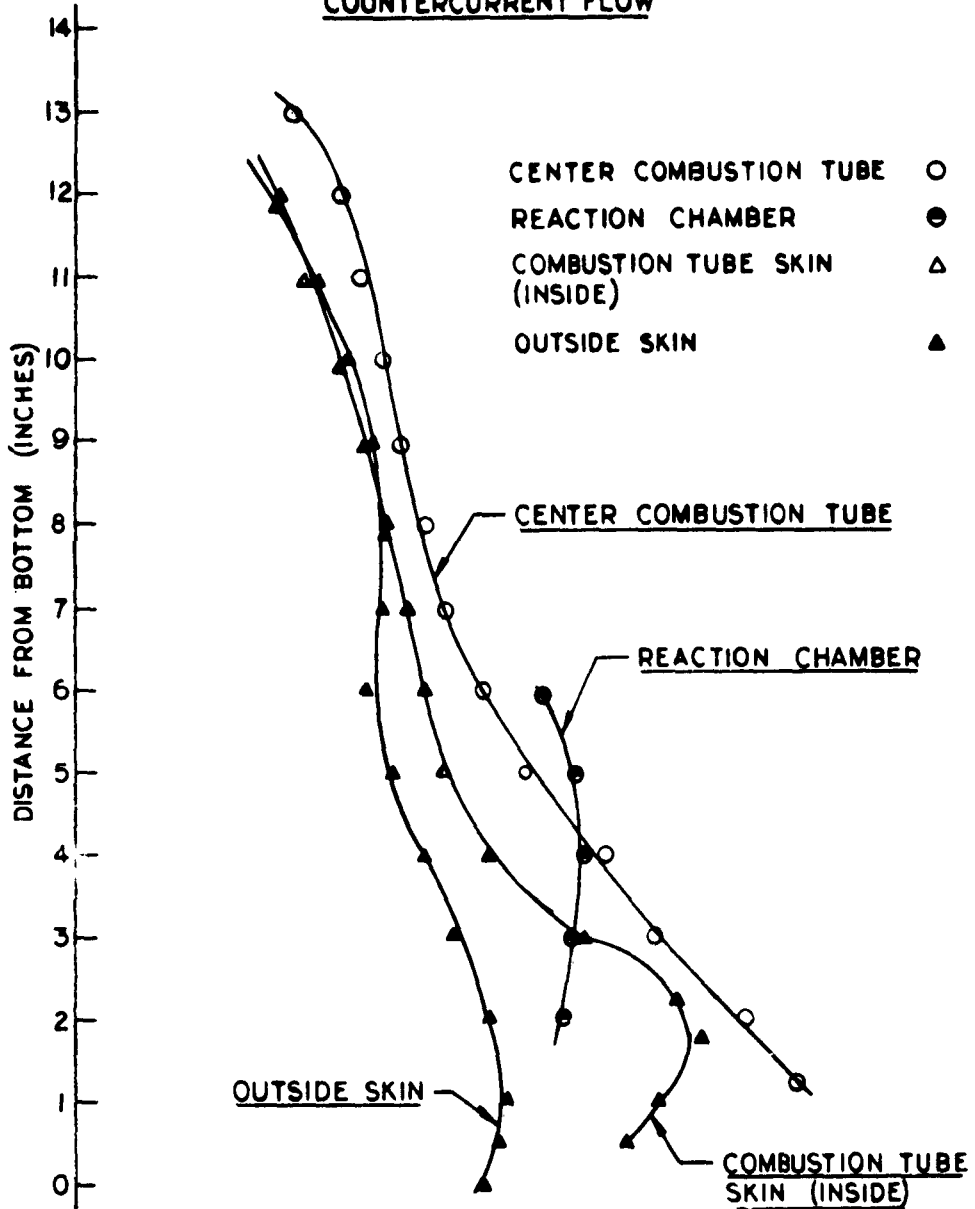

400 600 800 1000 1200 1400 1600 1800 2000
 (TEMP. °F)

FIG. 6
TEMPERATURE PROFILE
PORTABLE H₂ GENERATOR


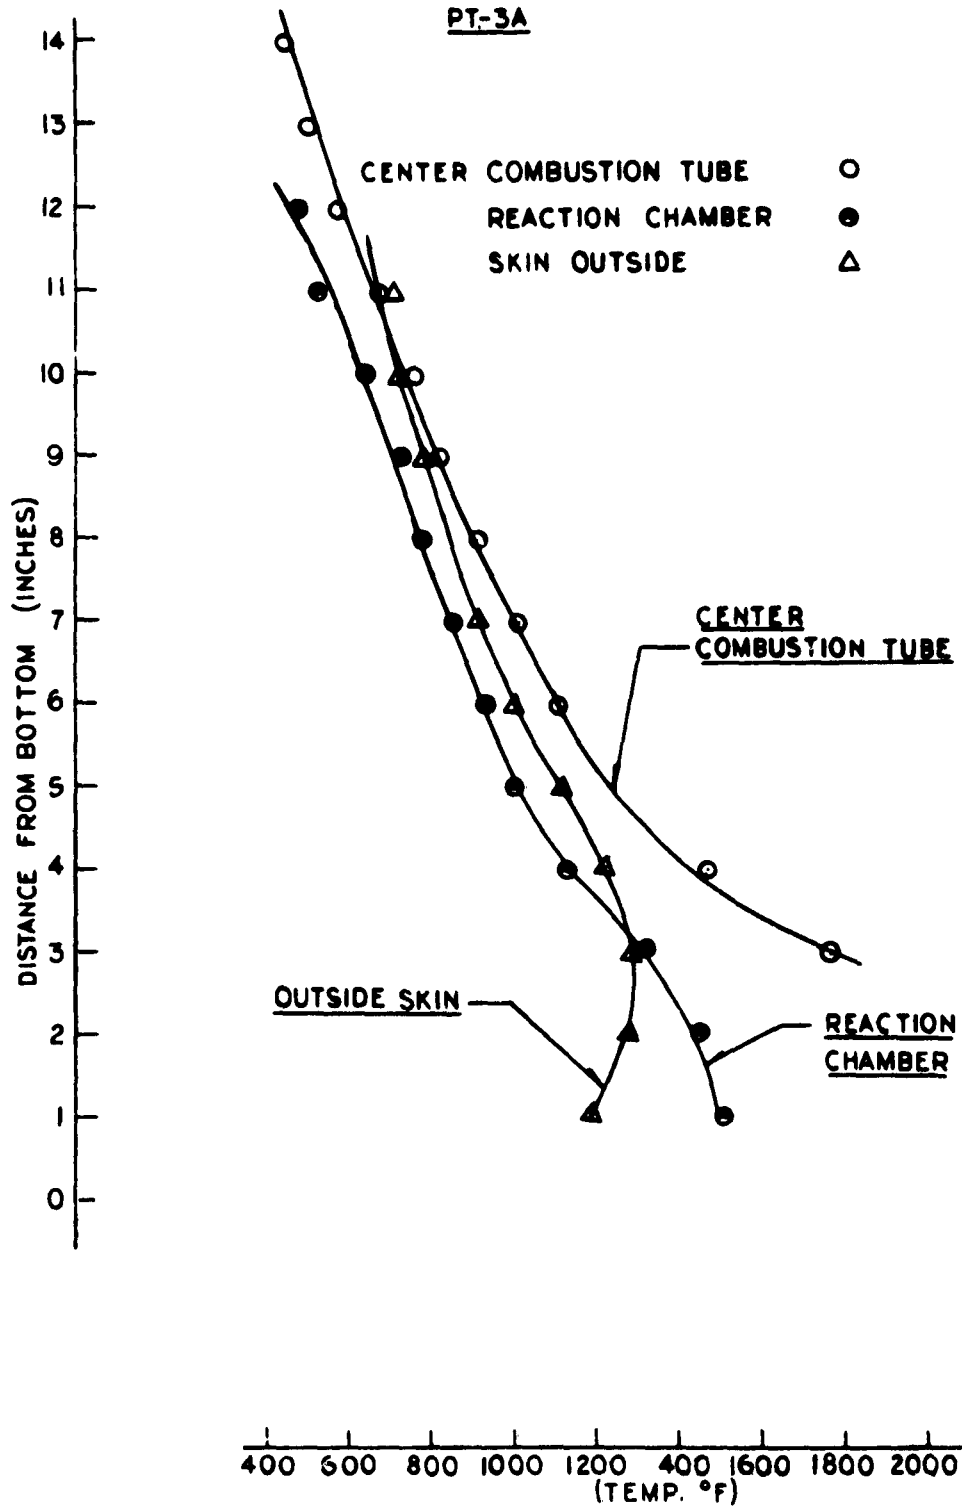


FIG. 7
AMMONIA SEPARATOR

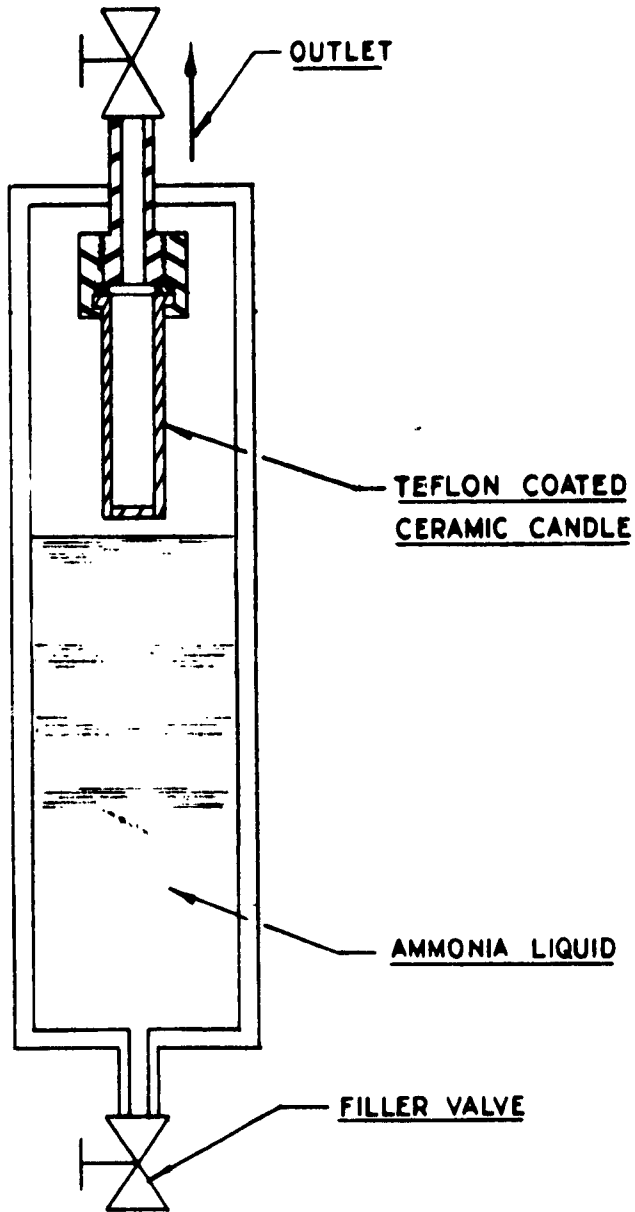

Engelhard Industries, Inc.
Process Equipment Division
Newark, New Jersey
HYDROGEN GENERATION FOR FUEL CELLS
by E. J. Emerson, L. Kantrowitz,
H. H. Geissler. Rept. No. 3
1 November 1962 - 31 January 1963
22 p. incl. illus. tables.
(Contract DA 36-039 SC-89077)

UNCLASSIFIED REPORT

A research project is carried out to develop a method of generating hydrogen from primary fuels in such a manner that the generation of hydrogen and its separation from other reaction products can be accomplished in the field on a portable basis. Successful operations continued on a portable hydrogen generator utilizing ammonia feed at a pressure of 35 psig. The waste stack gas was utilized successfully as the source of heat of vaporization

(over)

UNCLASSIFIED
Armed Services Technical
Information Agency
1. Electric power supply
by fuel cells.
2. Hydrogen fuel preparation.
3. Portable fuel generator.

- I. Emerson, E. J.
Kantrowitz, L.
- II. U. S. Army Electronics
Research and Development Laboratory
Contract DA 36-039
SC-89077
- III.

Engelhard Industries, Inc.
Process Equipment Division
Newark, New Jersey
HYDROGEN GENERATION FOR FUEL CELLS
by E. J. Emerson, L. Kantrowitz,
H. H. Geissler. Rept. No. 3
1 November 1962 - 31 January 1963
22 p. incl. illus. tables.
(Contract DA 36-039 SC-89077)

UNCLASSIFIED REPORT

A research project is carried out to develop a method of generating hydrogen from primary fuels in such a manner that the generation of hydrogen and its separation from other reaction products can be accomplished in the field on a portable basis. Successful operations continued on a portable hydrogen generator utilizing ammonia feed at a pressure of 35 psig. The waste stack gas was utilized successfully as the source of heat of vaporization

(over)

Engelhard Industries, Inc.
Process Equipment Division
Newark, New Jersey
HYDROGEN GENERATION FOR FUEL CELLS
by E. J. Emerson, L. Kantrowitz,
H. H. Geissler. Rept. No. 3
1 November 1962 - 31 January 1963
22 p. incl. illus. tables.
(Contract DA 36-039 SC-89077)

UNCLASSIFIED REPORT

A research project is carried out to develop a method of generating hydrogen from primary fuels in such a manner that the generation of hydrogen and its separation from other reaction products can be accomplished in the field on a portable basis. Successful operations continued on a portable hydrogen generator utilizing ammonia feed at a pressure of 35 psig. The waste stack gas was utilized successfully as the source of heat of vaporization

(over)

UNCLASSIFIED
Armed Services Technical
Information Agency
1. Electric power supply
by fuel cells.
2. Hydrogen fuel preparation.
3. Portable fuel generator.

- I. Emerson, E. J.
Kantrowitz, L.
- II. U. S. Army Electronics
Research and Development Laboratory
Contract DA 36-039
SC-89077
- III.

Engelhard Industries, Inc.
Process Equipment Division
Newark, New Jersey
HYDROGEN GENERATION FOR FUEL CELLS
by E. J. Emerson, L. Kantrowitz,
H. H. Geissler. Rept. No. 3
1 November 1962 - 31 January 1963
22 p. incl. illus. tables.
(Contract DA 36-039 SC-89077)

UNCLASSIFIED REPORT

A research project is carried out to develop a method of generating hydrogen from primary fuels in such a manner that the generation of hydrogen and its separation from other reaction products can be accomplished in the field on a portable basis. Successful operations continued on a portable hydrogen generator utilizing ammonia feed at a pressure of 35 psig. The waste stack gas was utilized successfully as the source of heat of vaporization

(over)

UNCLASSIFIED
Armed Services Technical
Information Agency
1. Electric power supply
by fuel cells.
2. Hydrogen fuel preparation.
3. Portable fuel generator.

- I. Emerson, E. J.
Kantrowitz, L.
- II. U. S. Army Electronics
Research and Development Laboratory
Contract DA 36-039
SC-89077
- III.

UNCLASSIFIED
Armed Services Technical
Information Agency
1. Electric power supply
by fuel cells.
2. Hydrogen fuel preparation.
3. Portable fuel generator.

- I. Emerson, E. J.
Kantrowitz, L.
- II. U. S. Army Electronics
Research and Development Laboratory
Contract DA 36-039
SC-89077
- III.

to the liquid ammonia to maintain the ammonia vapor at the necessary operating pressure. Suitable mixtures of water and JP-4 have been emulsified by simple shaking with an emulsifying agent.

to the liquid ammonia to maintain the ammonia vapor at the necessary operating pressure. Suitable mixtures of water and JP-4 have been emulsified by simple shaking with an emulsifying agent.

to the liquid ammonia to maintain the ammonia vapor at the necessary operating pressure. Suitable mixtures of water and JP-4 have been emulsified by simple shaking with an emulsifying agent.

to the liquid ammonia to maintain the ammonia vapor at the necessary operating pressure. Suitable mixtures of water and JP-4 have been emulsified by simple shaking with an emulsifying agent.

DISTRIBUTION LIST
THIRD QUARTERLY REPORT
CONTRACT NO. DA 36-039 SC-89077

Commanding Officer U.S.A. Electronics Research and Development Laboratory Fort Monmouth, N.J. ATTN: Logistics Division (MARKED FOR PPROJECT ENGINEER)	(6)	Air Force Cambridge Research Laboratories ATTN: CRZC L. G. Hanscom Field Bedford, Massachusetts	(1)
ATTN: SELRA/P	(1)	Rome Air Development Center ATTN: RAALD	
ATTN: Dir of Research/Engineering	(1)	Griffiss Air Force Base, N.Y.	(1)
ATTN: File Unit #1	(1)		
ATTN: Technical Document Center	(1)	Commanding General U.S.A. Electronics Research and Development Activity ATTN: Technical Library Fort Huachuca, Arizona	(1)
ATTN: Technical Information Div. (UNCLASSIFIED REPORTS ONLY FOR RETRANSMITTAL TO ACCREDITED BRITISH AND CANADIAN GOVERNMENT REPRESENTATIVES)	(3)	Commanding Officer Harry Diamond Laboratories ATTN: Library, Room 211, Bldg. 92 Connecticut Ave. & Van Ness St., N.W. Washington 25, D.C.	(1)
ATTN: Security Division (CLASSIFIED REPORTS ONLY FOR RETRANSMITTAL TO ACCREDITED BRITISH AND CANADIAN GOVERNMENT REPRESENTATIVES)	(3)	Commanding Officer U.S.A. Electronics Material Support Agency ATTN: SELMS-ADJ Fort Monmouth, N.J.	(1)
OASD (R&D), Rm 3E1065 ATTN: Technical Library The Pentagon Washington 25, D.C.	(1)	Deputy President U.S.A. Security Agency Board Arlington Hall Station Arlington 12, Virginia	(1)
Chief of Research and Development OCS, Department of the Army Washington 25, D.C.	(1)	Commander Armed Services Technical Information Agency ATTN: TISIA Arlington Hall Station Arlington 12, Virginia	(10)
Commanding General U.S.A. Electronics Command ATTN: AMSEL-AD Fort Monmouth, N.J.	(3)	Chief U.S.A. Security Agency Arlington Hall Station Arlington 12, Virginia	(2)
Director U.S. Naval Research Laboratory ATTN: Code 2027 Washington 25, D.C.	(1)		
Commanding Officer and Director U.S. Naval Electronics Laboratory San Diego 52, California	(1)		

DISTRIBUTION LIST
THIRD QUARTERLY REPORT
CONTRACT NO. DA 36-039 SC-89077

Commander Aeronautical Systems Division ATTN: ASAPRL Wright-Patterson Air Force Base Ohio	(1)	Corps of Engineers Liaison Office U.S.A. Electronics Research and Development Laboratory Fort Monmouth, N.J.	(1)
Air Force Cambridge Research Laboratories ATTN: CRXL-R L. G. Hanscom Field Bedford, Massachusetts	(1)	Marine Corps Liaison Office U.S.A. Electronics Research and Development Laboratory Fort Monmouth, N.J.	(1)
Headquarters U.S. Army Material Command Research and Development Directorate ATTN: AMCRD-DE-MO Washington 25, D.C.	(1)	AFSC Scientific/Technical Liaison Office U.S.A. Electronics Research and Development Laboratory Fort Monmouth, N.J.	(1)
Commanding General U.S.A. Electronics Command ATTN: AMSEL-RE-A Fort Monmouth, N.J.	(1)	Power Information Center Moore School Building 200 South Thirty-Third Street Philadelphia 4, Pennsylvania	(1)
Commanding General U.S.A. Combat Developments Command ATTN: CDCMR-E Fort Belvoir, Virginia	(1)	Dr. Sidney J. Magram Physical Sciences Division Army Research Office 3045 Columbia Pike Arlington, Virginia	(1)
Commanding Officer U.S.A. Communications and Electronics Combat Development Agency Fort Huachuca, Arizona	(1)	Dr. Ralph Roberts Head, Power Branch Office of Naval Research (Code 429) Department of the Navy Washington 25, D.C.	(1)
Director Fort Monmouth Office U.S.A. Communications and Electronics Combat Development Agency Fort Monmouth, N.J.	(1)	Mr. Bernard B. Rosenbaum Bureau of Ships (Code 340) Department of the Navy Washington 25, D.C.	(1)
Air Force Systems Command Scientific/Technical Liaison Office U.S. Naval Air Development Center Johnsville, Pennsylvania	(1)	Mr. George W. Sherman Aeronautical Systems Division ATTN: ASRMFP Wright-Patterson Air Force Base Ohio	(1)

DISTRIBUTION LIST
THIRD QUARTERLY REPORT
CONTRACT NO. DA 36-039 SC-89077

Union Carbide Corporation Union Carbide Consumer Products Co. 270 Park Avenue New York 17, New York ATTN: Mr. R. B. Klopfenstein	(1)	Speer Carbon Company Research Laboratory Packard Road at 47th Street Niagara Falls, New York ATTN: Dr. W. E. Parker	(1)
United Aircraft Corporation Pratt & Whitney Aircraft Division East Hartford 8, Connecticut ATTN: Mr. J. M. Lee	(1)	Monsanto Research Corporation Boston Laboratories Everett 49, Massachusetts ATTN: Mr. R. G. Gentile	(1)
Melpar, Inc. 3000 Arlington Boulevard Falls Church, Virginia ATTN: Mr. R. T. Foley	(1)	Dr. H. D. Gregor 150 Lakeview Avenue Leonia, New Jersey	(1)
General Electric Company Direct Energy Conversion Operations Lynn, Massachusetts ATTN: Dr. E. Oster	(1)	Westinghouse Electric Corporation 43 West Front Street Red Bank, New Jersey ATTN: Mr. C. Arthur	(1)
General Electric Company Research Laboratory Schenectady, New York ATTN: Dr. H. Liebhoafsky	(1)	Magna Corporation R&D Laboratories 1001 South East Street Anaheim, California ATTN: Dr. Silverman	(1)
ESSO Research and Engineering Company Products Research Division P.O. Box 215 Linden, New Jersey ATTN: Dr. M. A. Weiss	(1)	American Oil Company Research & Development Dept. Whiting Laboratories 2500 New York Avenue P.O. Box 431 Whiting, Indiana	(1)
Texas Research Associates Company 1701 Guadalupe Street Austin 1, Texas ATTN: Dr. R. M. Hurd	(1)		
University of Pennsylvania John Harrison Laboratory of Chemistry Philadelphia 4, Pennsylvania ATTN: Dr. J. Bockris	(1)		

DISTRIBUTION LIST
THIRD QUARTERLY REPORT
CONTRACT NO. DA 36-039 SC-89077

Dr. John H. Huth
Advanced Research Projects Agency
The Pentagon, Room 3E157
Washington 25, D.C. (1)

Lt. Col. George H. Ogburn, Jr.
Auxiliary Power Branch (SNAP)
Division of Reactor Development
U.S. Atomic Energy Commission
Washington 25, D.C. (1)

Mr. Walter C. Scott
National Aeronautics & Space
Administration
1520 H Street, N.W.
Washington 25, D.C. (1)

Institute for Defense Analysis
1666 Connecticut Avenue, N.W.
Washington 25, D.C.
ATTN: Dr. Szego & Mr. Hamilton (1)