

**UNCLASSIFIED**

**AD** **404 787**

**DEFENSE DOCUMENTATION CENTER**

**FOR**

**SCIENTIFIC AND TECHNICAL INFORMATION**

**CAMERON STATION, ALEXANDRIA, VIRGINIA**



**UNCLASSIFIED**

**NOTICE:** When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD NO. 404787

ASTIA FILE COPY

9813-6004-RU000

404 787

63-3-5

(1)

APPLICATION OF A DISCRETE  
VELOCITY MODEL TO THE BOLTZMANN  
EQUATION IN SHEAR FLOWS

By James E. Broadwell

MAY 1963

819501  
SPACE TECHNOLOGY LABORATORIES, INC.  
a subsidiary of Thompson Ramo Wooldridge Inc.  
ONE SPACE PARK • REDONSO BEACH, CALIFORNIA

DDC  
RECEIVED  
MAY 28 1963  
ASTIA. D

\$2.60

(4) \$2.60

(5) 819500

(11-9) NA

(12) 20p.

(13) NA

(14) 9813 ≠ 6004 ≠ RU000

(15-19) NA

(20) Z

(21) NA

(6) APPLICATION OF A DISCRETE VELOCITY MODEL  
TO THE BOLTZMANN EQUATION IN SHEAR FLOWS.

(10)

Prepared by

James E. Broadwell.

(11) May 63.

The work reported here was carried  
out as a part of the Space Technology  
Laboratories Independent Research  
Program

SPACE TECHNOLOGY LABORATORIES, INC.  
Los Angeles 45, California

9813-6004-RU000

May 1963

Prepared by James E. Broadwell  
James E. Broadwell  
Associate Manager  
Aerosciences Laboratory  
Research Staff

Approved by Andrew G. Hammitt  
Andrew G. Hammitt  
Manager  
Aerosciences Laboratory  
Research Staff

SPACE TECHNOLOGY LABORATORIES, INC.  
A subsidiary of Thompson Ramo Wooldridge, Inc.  
One Space Park • Redondo Beach, California

404787

ABSTRACT

↙ The application of a simple discrete velocity model to low Mach number Couette and Rayleigh flow is investigated. In the model, the molecular velocities are restricted to a finite set and in this study only eight equal speed velocities are allowed. The Boltzmann equation is reduced by this approximation to a set of coupled differential equations which are shown to be identical in form to those produced when the same approximation is applied to the Krook equation. The fluid velocity and shear stress in Couette flow are in approximate accord with those of Wang Chang and Uhlenbeck and of Lees over the complete range of Knudsen number. ↘

i

## INTRODUCTION

In a previous report (1), an approximate description of low Mach number rarefied shear flow was obtained by restricting the molecular velocities to a finite, prescribed set, an approximation which reduces the governing integro-differential equation to a set of coupled differential equations. That study was based on the Krook approximation to the Boltzmann equation and eight, equal magnitude, molecular velocities were allowed. It is the purpose of this report to show that when the same approximation is applied to the Boltzmann equation itself, the resulting set of differential equations is identical in form to that obtained from the Krook model; the only difference is in the magnitude of the relaxation time. In the Krook model this parameter was set equal to the mean time between collisions,  $\lambda/\bar{c}$ ; here it is shown that it is approximately  $\lambda/.68 \bar{c}$ . The Couette flow results of Ref. 1 are brought into approximate quantitative agreement with those of Wang Chang and Uhlenbeck (2) and of Lees (3) by the use of the new relaxation time. There is also significant improvement in the Rayleigh flow solutions.

## THE DISCRETE VELOCITY MODEL

The Boltzmann equation may be written

$$\frac{\partial f}{\partial t} + u \frac{\partial f}{\partial x} + v \frac{\partial f}{\partial y} + w \frac{\partial f}{\partial z} = \left( \frac{\partial f}{\partial t} \right)_c = G - L \quad (1)$$

in which  $f$  is the distribution function depending on the time and space variables  $t, x, y, z$  and on the molecular velocity  $\vec{v}$  with components  $u, v, w$ .

The rate of change of  $f$  due to collisions is written as the gain minus the loss,  $G - L$ . Now if the molecules occupy, between collisions, a finite set of cells located at  $\vec{v}_1$  in velocity space, Eq. (1) can be written

$$\frac{\partial N_1}{\partial t} + u_1 \frac{\partial N_1}{\partial x} + v_1 \frac{\partial N_1}{\partial y} + w_1 \frac{\partial N_1}{\partial z} = \left( \frac{\partial N_1}{\partial t} \right)_c = G_1 - L_1 \quad (2)$$

in which  $N_1$  is the number of molecules per unit volume with velocity  $\vec{v}_1$ .

Before evaluating  $(G_1 - L_1)$  for eight cells, consider as a simpler example the two - dimensional gas lying in the  $u, v$  plane with four velocities as sketched in Fig. 1a.

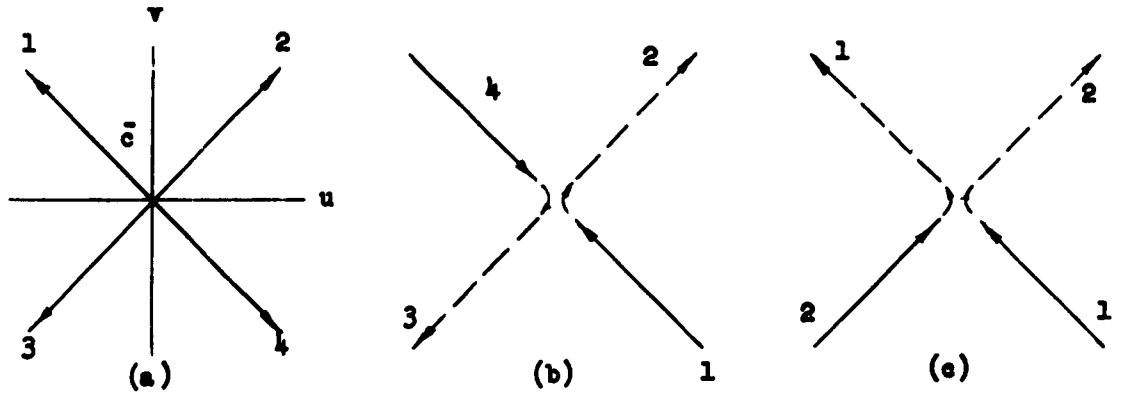


Figure 1



The speed is taken to be the mean thermal speed,  $\bar{c}$ . The rate of change of  $N_1$ , for instance, due to collisions is determined as follows. Loss of molecules from cell 1 occurs only when these molecules collide with those in cell 4, for collision with cell 2 or 3 occupants results only in an exchange of cells (see Figs. 1b and 1c). Thus the loss from cell 1 can be written

$$L_1 = v_r S_e N_1 N_4 = 2 \bar{c} S_e N_1 N_4$$

where  $v_r$  is the relative speed, equal to  $2 \bar{c}$ , and  $S_e$  is the effective collision cross section, i.e., the cross section which deflects collision partners from cells 1 and 4 to 2 and 3. These same arguments show, of course, that molecules are thrown into cell 1 from collisions 2 - 3; therefore

$$G_1 = 2 \bar{c} S_e N_2 N_3$$

and

$$\left( \frac{\partial N_1}{\partial t} \right)_c = 2 \bar{c} S_e (N_2 N_3 - N_1 N_4).$$

The expressions for the other cells can be written in the same way.

When there are eight cells, symmetrically placed in the eight velocity quadrants (see Fig. 2), and the flow is independent of  $z$  and symmetrical about the  $w = 0$  plane,

$$N_1 = N_5, N_2 = N_6, N_3 = N_7, N_4 = N_8$$

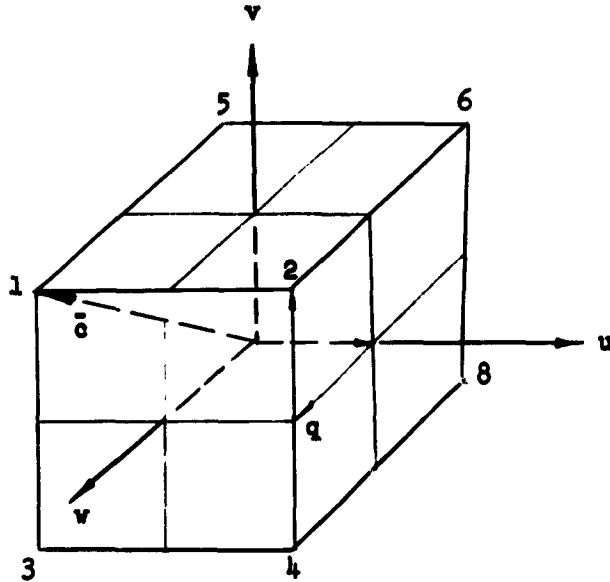


Figure 2

Under these conditions and with the assumption that the molecules are hard elastic spheres, it is shown in the Appendix that

$$\left( \frac{\partial N_1}{\partial t} \right)_c = \sqrt{2/3} (1 + 2/\sqrt{3}) \bar{c} S (N_2 N_3 - N_1 N_4) \quad (3)$$

where  $S$  is the mutual collision cross section.

Anticipating the application of these equations to low Mach number Couette and Rayleigh flow, let us divide Eq. (2) by the number density,  $N$ ,

assumed constant. Then making use of Eq. (3) and corresponding expressions for the other cells we get,

$$\frac{\partial n_1}{\partial t} - q \frac{\partial n_1}{\partial x} + q \frac{\partial n_1}{\partial y} = 2 \theta (n_2 n_3 - n_1 n_4) \quad (4a)$$

$$\frac{\partial n_2}{\partial t} + q \frac{\partial n_2}{\partial x} + q \frac{\partial n_2}{\partial y} = 2 \theta (n_1 n_4 - n_2 n_3) \quad (4b)$$

$$\frac{\partial n_3}{\partial t} - q \frac{\partial n_3}{\partial x} - q \frac{\partial n_3}{\partial y} = 2 \theta (n_1 n_4 - n_2 n_3) \quad (4c)$$

$$\frac{\partial n_4}{\partial t} + q \frac{\partial n_4}{\partial x} - q \frac{\partial n_4}{\partial y} = 2 \theta (n_2 n_3 - n_1 n_4) \quad (4d)$$

where  $n_i$  is the fraction of molecules in cell  $i$ ,  $q = \bar{c}/\sqrt{3}$ , and

$$\theta = \frac{1}{\sqrt{6}} (1 + 2/\sqrt{3}) \bar{c} S N.$$

Several general features of these equations are worth noting. First, when they are multiplied successively by the collisional invariants,  $m$ ,  $m u_1$ ,  $m v_1$  ( $m$  is the molecular weight) and summed, the right hand sides vanish, a consequence of the fact that the collisions sketched in Fig. 1 conserve the number of molecules and satisfy the equations of motion. (Energy is automatically conserved since the speed is constant.)

The equilibrium condition is

$$n_1 n_4 = n_2 n_3$$

a remnant of the general equilibrium condition

$$f(\vec{v}'_1) f(\vec{v}'_2) = f(\vec{v}_1) f(\vec{v}_2).$$

If the  $n_i$ 's are independent of  $x$  and  $y$  it is easy to show with the help of Eqs. (4) that the  $H$  function, defined by

$$H = \sum_i n_i \ln n_i,$$

obeys the equation

$$\frac{dH}{dt} = 2 \theta (n_2 n_3 - n_1 n_4) (\ln n_1 n_4 - \ln n_2 n_3)$$

and hence

$$\frac{dH}{dt} \leq 0$$

as in the exact equation

#### COUETTE AND RAYLEIGH FLOW EQUATIONS

To apply Eqs. (4) to Couette and Rayleigh flow we assume, as was done in Ref. 1, that the fluid velocity in the  $y$  direction,  $V$ , is negligible (the walls are parallel to the  $x$  - axis) when the Mach number is low enough.

Then since  $V = \sum_i n_i v_i$ ,

$$n_1 + n_5 + n_2 + n_6 = n_3 + n_7 + n_4 + n_8 = \frac{1}{2}$$

and from the symmetry about  $w = 0$ ,

$$n_1 + n_2 = n_3 + n_4 = \frac{1}{4}.$$

These relations make Eqs. (4b) and 4d), say, superfluous and allow the others to be written

$$\frac{\partial n_1}{\partial t} + q \frac{\partial n_1}{\partial y} = \frac{\theta}{2} (-n_1 + n_3) \quad (5a)$$

$$\frac{\partial n_3}{\partial t} - q \frac{\partial n_3}{\partial y} = -\frac{\theta}{2} (-n_1 + n_3) \quad (5b)$$

when the terms depending on  $x$  are dropped. These are Eqs. (18a) and (18c) of Ref. 1 with  $\theta$  appearing in place of  $\sigma$ , quantities which differ only by a numerical factor.\*

This is the result stated above, namely, that to the present approximation the Boltzmann and Krook equations lead to differential equations describing Couette and Rayleigh flow which are identical in form. This could perhaps be taken as simply an indication of the crudity of the eight cell model were it not for the many points of agreement, discussed in the following, between the results given by this simple model and those of much more rigorous analyses.

In the Krook model the magnitude of the effective collision rate must be chosen arbitrarily - it is of the order of the inverse of the mean time between collisions - and in Ref. 1 it was set equal to this quantity, i.e.,

---

\* In Ref. 1,  $n_1$  represents the sum of the fraction of molecules in cells 1 and 5, i.e.,  $2 n_1$ ;  $n_2$  represents  $2 n_2$ ; etc. Eqs. (5), being linear, can be similarly interpreted.

to  $\sigma = \bar{c}/\lambda$ . It is shown in the Appendix that  $\theta = .68 \bar{c}/\lambda$ . With this degree of arbitrariness removed from the discrete velocity model, it is worthwhile to compare the solutions, quantitatively, with those of Wang Chang and Uhlenbeck (2) and of Lees (3). Only Couette flow will be discussed here; the Rayleigh flow solutions, described in Ref. 1., are also improved when  $\theta$  replaces  $\sigma$  but the details will be given in a later report.

COUETTE FLOW SOLUTION

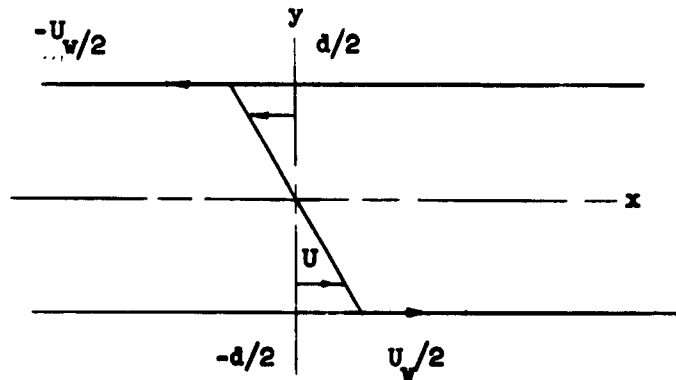


Figure 3.

Consider the steady Couette flow sketched in Fig. 3. For this problem Equations (5a) and (5b) can be written

$$\frac{d n_1}{d y^*} = \alpha(-n_1 + n_3) \quad (6a)$$

$$\frac{d n_3}{d y^*} = \alpha(-n_1 + n_3) \quad (6b)$$

where  $y^* = y/d$  and  $\alpha = d \theta/2 q$

When the reflection from both walls is diffuse and  $n_1 = n_5$ ,  $n_2 = n_6$ , etc., the boundary conditions are

$$\frac{q^2 \left[ -n_3\left(\frac{1}{2}\right) + n_4\left(\frac{1}{2}\right) \right]}{q \left[ n_3\left(\frac{1}{2}\right) + n_4\left(\frac{1}{2}\right) \right]} = -\frac{U_w}{2}$$

$$\frac{q^2 \left[ -n_1\left(-\frac{1}{2}\right) + n_2\left(-\frac{1}{2}\right) \right]}{q \left[ n_1\left(-\frac{1}{2}\right) + n_2\left(-\frac{1}{2}\right) \right]} = \frac{U_w}{2}$$

where  $U_w$  is the difference in the wall velocities. These equations state that the average x - component of velocity of the molecules leaving the upper wall is  $-U_w/2$  at the upper wall and that of the upward flowing particles is  $U_w/2$  at the lower wall. Then since  $n_1 + n_2 = n_3 + n_4 = \frac{1}{4}$ ,

$$n_1\left(-\frac{1}{2}\right) = \frac{1}{8}(1 - U_w/2q), \quad n_3\left(\frac{1}{2}\right) = \frac{1}{8}(1 + U_w/2q)$$

Solutions to Equations (6a) and (6b) satisfying these conditions are

$$n_1 = \frac{1}{8} \left[ \frac{\alpha}{(\alpha+1)} \frac{U_v}{q} y^* + 1 - \frac{1}{2(\alpha+1)} \frac{U_v}{q} \right]$$

$$n_3 = \frac{1}{8} \left[ \frac{\alpha}{(\alpha+1)} \frac{U_v}{q} y^* + 1 + \frac{1}{2(\alpha+1)} \frac{U_v}{q} \right]$$

From these 'distribution functions' the fluid velocity in the  $x$  direction,  $U$ , is found to be

$$\begin{aligned} U &= \sum_1 u_1 n_1 = 2q \left[ -n_1 + n_2 - n_3 + n_4 \right] = q \left[ 1 - 4(n_1 + n_3) \right] \\ &= - \frac{\alpha}{(\alpha+1)} U_v y^* \end{aligned} \quad (7)$$

and the shear stress,  $p_{yx}$ , is given by

$$\begin{aligned} p_{yx} &= \rho \sum_1 u_1 v_1 n_1 = 2\rho q^2 \left[ -n_1 + n_2 + n_3 - n_4 \right] = 4\rho q^2 \left[ -n_1 + n_3 \right] \\ &= \frac{1}{2(\alpha+1)} \rho q U_v \end{aligned} \quad (8)$$

Defining the viscosity,  $\mu$ , by  $p_{yx} / \frac{dU}{dy}$  we have from Equations (7) and (8)

$$\mu = \rho q d / 2\alpha = \rho q^2 / \theta$$

and with  $\theta = .68 \bar{c}/\lambda$  and  $q = \bar{c}/\sqrt{3}$ ,

$$\mu = .49 \rho \bar{c} \lambda$$

compared with the classical value of  $.499 \rho \bar{c} \lambda$ .

Next the fractional slip velocity,  $2 \Delta U/U_v$ , defined by



$$2 \Delta U/U_w = \frac{U_w/2 - U(-\frac{1}{2})}{U_w/2}$$

is, from Equation (7),

$$2 \Delta U/U_w = \frac{1}{\alpha + 1} = \frac{1}{.59 d/\lambda + 1} \quad (9)$$

Lees finds, for Maxwell molecules,

$$2 \Delta U/U_w = \frac{1}{.5 d/\lambda + 1}$$

These expressions are shown in Figure 4, together with the results of Wang Chang and Uhlenbeck who also treated Maxwell molecules.

Finally, the ratio of the shear stress to the free molecule value,  $p_{yx}/(p_{yx})_{f.m.}$ , can be found from Equation (8) to be given, also, by

$$p_{yx}/(p_{yx})_{f.m.} = \frac{1}{\alpha + 1} = \frac{1}{.59 d/\lambda + 1} \quad (10)$$

Similarly, Lees' expression is

$$p_{yx}/(p_{yx})_{f.m.} = \frac{1}{.5 d/\lambda + 1}$$

In Figure 4 the Wang Chang and Uhlenbeck values are compared with these two equations. Equation (10) lies below those of the other investigators at large  $d/\lambda$  because the value for the free molecule shear stress is given incorrectly by Equation (8) - it is approximately 15 percent too large. With this correction the shear stress is seen to be in good agreement with the Reference 2 value at large  $d/\lambda$ .

In summary, the simple discrete velocity model gives a reasonably accurate description of low Mach number Couette flow over the complete range of  $d/\lambda$ . It should be remembered, however, that the calculations of the collision cross sections in the Appendix can only be defended as being reasonable.

A further study of this flow with more molecular velocity cells is required before we can be sure that the accuracy of the eight cell solution is not simply fortuitous.

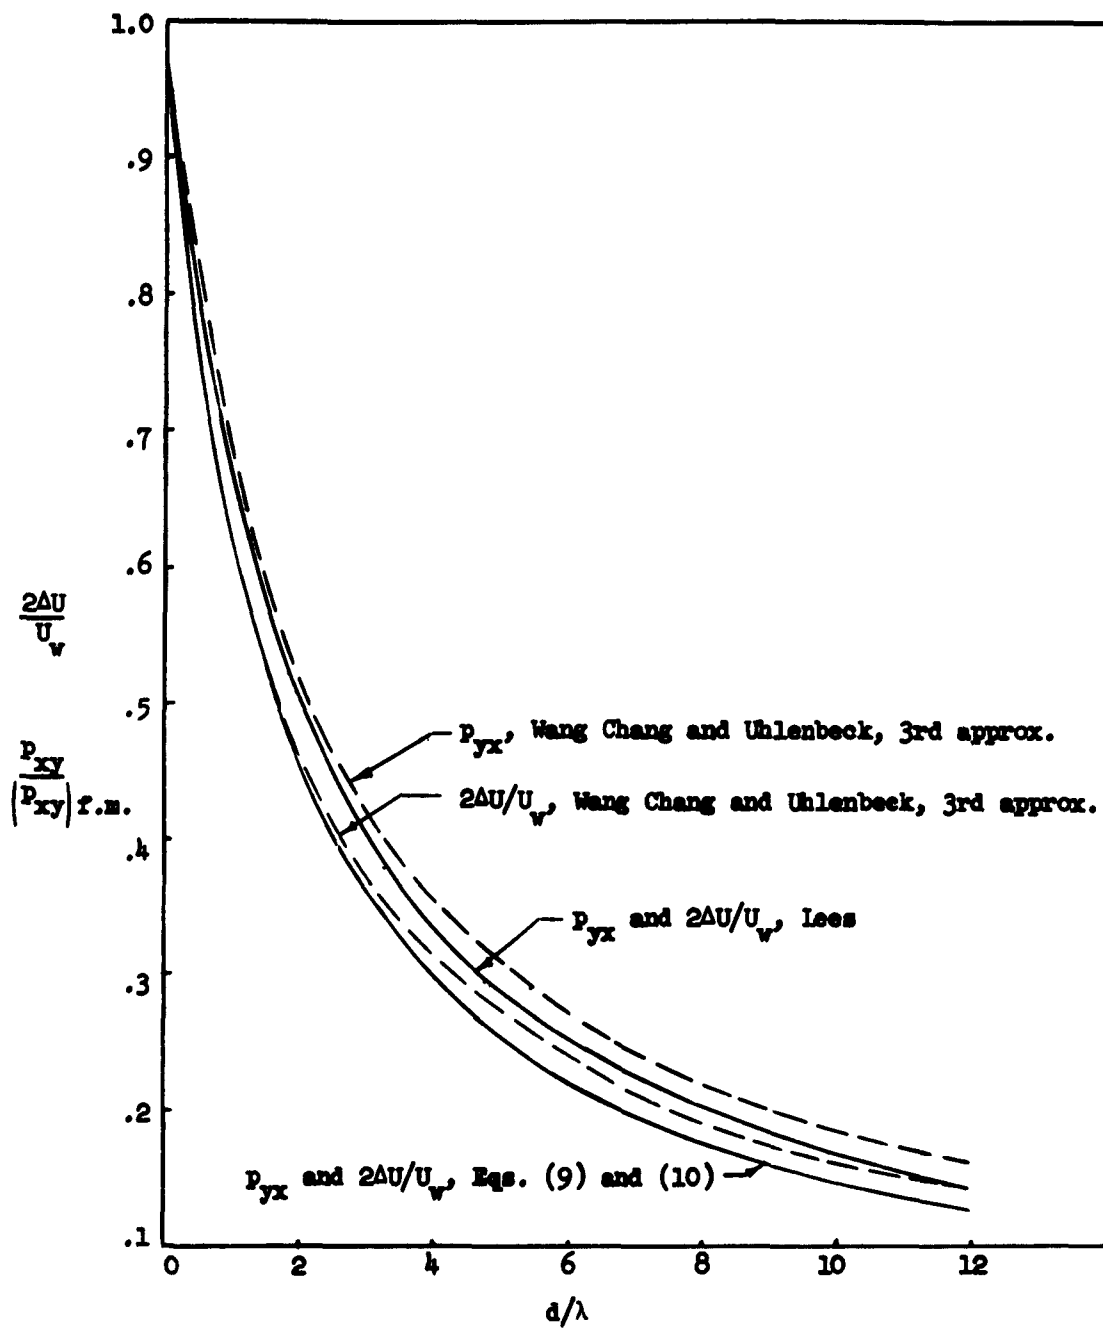


Figure 4.

Velocity slip and shear stress as a function of Knudsen number

# APPENDIX

To find the rate of change of  $N_1$  due to collisions we must first determine which of its possible collisions cause a net loss or gain from cell 1 as distinguished from those in which the collision partners simply exchange cells. Refer to Table 1 in which the sign of the velocity components are listed. Molecules may jump only between pairs of cells in which there is

cell /	1	2	3	4	5	6	7	8
u	-	+	-	+	-	+	-	+
v	+	+	-	-	+	+	-	-
w	+	+	+	+	-	-	-	-

Table 1. Sign of velocity components

the same combination of signs for u, v, and w. Thus the collision 1-4  $\leftrightarrow$  2-3 is possible but the collision 1-2 has no effect.

The collisions in which  $N_1$  is depleted are:

$$\begin{array}{lll} 1-4 \rightarrow 2-3 & 1-6 \rightarrow 2-5 & 1-7 \rightarrow 3-5 \\ 1-8 \rightarrow 2-7 & 1-8 \rightarrow 3-6 & 1-8 \rightarrow 4-5 \end{array}$$

and the rate of loss,  $L_1$ , is

$$L_1 = v_r^a s_e^a (N_1 N_4 + N_1 N_6 + N_1 N_7) + v_r^b s_e^b (N_1 N_8)$$

where the superscript a refers to the relative velocity and effective cross section of collision partners diagonally opposed on the faces of the velocity cube in Fig. 2 and b to those on the cube diagonals.

From symmetry, molecules from a collision 1-8, for instance, are equally distributed to 2-7, 3-6, and 4-5, and therefore the rate of addition to cell 1 is

$$G_1 = v_r^a s_e^a (N_2 N_3 + N_2 N_5 + N_3 N_5) \\ + \frac{1}{3} v_r^b s_e^b (N_2 N_7 + N_3 N_6 + N_4 N_5)$$

The relative velocities are given by

$$v_r^a = 2 \sqrt{\frac{2}{3}} \bar{c} \quad v_r^b = 2 \bar{c}.$$

The effective collision cross sections are determined for hard elastic spheres as follows. Consider first an encounter of the kind 1-4, which takes place in the  $w = \text{constant}$  plane, as sketched in Fig. 1b. The question is what fraction of those molecules that collide should be assigned to cells 2 and 3 (with the others being returned to 1 and 4). Since the scattering has circular symmetry the most reasonable assumption is that half of the colliding molecules are deflected, i.e., that

$$s_e^a = \frac{1}{2} S.$$

where  $S$  is the mutual collision cross section. The corresponding assumption for collisions such as 1-8, in which there is scattering in three dimensions, leads to the result

$$s_e^b = 1/\sqrt{2} \text{ s.}$$

Finally, making use of the symmetry about  $w = 0$ , i.e., of the condition  $N_1 = N_5$ ,  $N_2 = N_6$ , etc., and dividing  $G_1$  and  $L_1$  by  $N$ , we get

$$\begin{aligned} \left(\frac{\partial n_1}{\partial t}\right)_c &= \frac{1}{N} (G_1 - L_1) = \sqrt{2/3} (1 + 2/\sqrt{3}) \bar{c} \text{SN}(n_2 n_3 - n_1 n_4) \\ &= 2 \theta (n_2 n_3 - n_1 n_4) \end{aligned}$$

where

$$\theta = \frac{1}{\sqrt{6}} \left( 1 + \frac{2}{\sqrt{3}} \right) \bar{c} \text{S N}$$

The solutions of Eqs. (5a) and (5b) or Eqs. (18a) and (18c) of Ref. 1 and hence quantities such as viscosity, velocity slip, etc., are given directly in terms of  $\theta$  but the fluid mechanical results are usually stated in terms of the mean free path,  $\lambda$ . To introduce this parameter we have to assume that the gas is close to equilibrium and that the velocity gradients are small, i.e., that in our case the  $N_i$ 's are nearly equal.

The collision rate of all the molecules of cell 1, for instance, is given by

$$\begin{aligned} \varphi &= \bar{c} \text{S} \left[ 2/\sqrt{3} (N_1 N_2 + N_1 N_3 + N_1 N_5) + 2\sqrt{2/3} (N_1 N_4 + N_1 N_6 + N_1 N_7) \right. \\ &\quad \left. + 2 N_1 N_8 \right] \\ &= (6/\sqrt{3} + 6\sqrt{2/3} + 2) \bar{c} \text{S} N_1^2 = 10.37 \bar{c} \text{S} N_1^2 \end{aligned}$$

Then the collision frequency per molecule,  $\sigma$ , is

$$\sigma = \frac{\varphi}{N_1} = 10.37 \bar{c} S N_1 = \frac{10.37}{8} S \bar{c} N = 1.3 \bar{c} S N,$$

and

$$\lambda = \frac{\bar{c}}{\sigma} = \frac{1}{1.3 SN}.$$

Now recall that

$$\theta = \frac{1}{\sqrt{6}} (1 + 2/\sqrt{3}) \bar{c} S N = .88 \bar{c} S N$$

and therefore

$$\theta = \frac{.88}{1.3} \sigma = .68 \sigma = .68 \frac{\bar{c}}{\lambda}.$$

# SYMBOLS

$\bar{c}$	mean thermal speed
$d$	distance between walls in Couette flow
$f$	distribution function
$G$	gain in $f$ due to collisions
$H$	Boltzmann $H$ function
$L$	loss in $f$ due to collisions
$m$	molecular weight
$N$	number of molecules per unit volume
$N_1$	number of molecules per unit volume with velocity $\vec{v}_1$
$n_1$	fraction of molecules per unit volume with velocity $\vec{v}_1$
$p_{yx}$	shear stress
$(p_{yx})_{f.m.}$	free molecule shear stress
$q$	$\bar{c}/\sqrt{3}$ , component of $\bar{c}$ along coordinate axes
$S$	mutual collision cross section
$S_e$	effective collision cross section
$t$	time
$U$	x component of fluid velocity
$U_w$	difference in wall velocities
$\Delta U$	velocity slip
$u$	x component of molecular velocity



# SYMBOLS (Cont'd.)

$V$	y component of fluid velocity
$v$	y component of molecular velocity
$\vec{v}$	molecular velocity
$v_r$	relative molecular velocity
$w$	z component of molecular velocity
xyz	coordinate axes
$y^*$	$y/d$
$\alpha$	$d \theta/2 q$
$\theta$	effective collision rate, $\frac{\eta_i}{\sqrt{6}} (1 + 2/\sqrt{3}) \bar{c} S N = .68 \bar{c}/\lambda$
$\varphi$	collision rate of occupants of one velocity cell, per unit volume
$\lambda$	mean free path
$\mu$	viscosity
$\rho$	density, m N
$\sigma$	collision frequency per molecule , $\bar{c}/\lambda$

## Superscripts

a	refers to collision partners on same face of velocity cube, Figure 2
b	refers to collision partners on velocity cube diagonals, Figure 2

#### REFERENCES

1. Broadwell, J. E., "Study of Rarefied Shear Flow by the Discrete Velocity Method" Space Technology Laboratory Report No. 9813-6001-RU000, March 1963.
2. Wang Chang, C. S. and Uhlenbeck, G. E., "The Couette Flow between Two Parallel Plates as a Function of the Knudsen Number" University of Michigan, Engineering Research Institute Report No. 1999-1-T, June 1954.
3. Lees, Lester, "A Kinetic Theory Description of Rarefied Gas Flows" California Institute of Technology, Hypersonic Research Project, Memo. No. 51, December 15, 1959.