

**UNCLASSIFIED**

**AD 445097**

**DEFENSE DOCUMENTATION CENTER**

**FOR**

**SCIENTIFIC AND TECHNICAL INFORMATION**

**CAMERON STATION, ALEXANDRIA, VIRGINIA**



**UNCLASSIFIED**

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOLTR 64-74

ANALOG COMPUTERS FOR THE EVALUATION OF  
AERODYNAMIC COEFFICIENTS

- RELEASED TO DDC  
BY THE NAVAL ORDNANCE LABORATORY
- Without restrictions
  - For Release to Military and Government Agencies Only.
  - Approval by NOL required for release to contractors.
  - Approval by BuWeps required for all subsequent release.


21 APRIL 1964

# NOL

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

445092  
CLASSIFIED BY DDC  
AS [unclear]

NOLTR 64-74

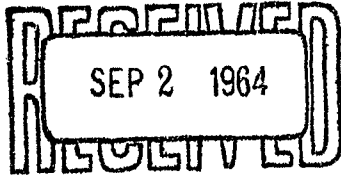DDC  
  
 DDC-IRA C

NOLTR 64-74

Aerodynamics Research Report 225

ANALOG COMPUTERS FOR THE  
EVALUATION OF AERODYNAMIC COEFFICIENTS

Prepared by:  
Joseph W. Willis

ABSTRACT: During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.

PUBLISHED AUGUST 1964

U. S. NAVAL ORDNANCE LABORATORY  
WHITE OAK, MARYLAND

NOLTR 64-74

21 April 1964

ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC  
COEFFICIENTS

This report has been prepared under Task Number RMMO-42-009/  
212-1/F008-09-01 and describes for reference purposes the  
aerodynamic coefficient computers employed with the U. S.  
Naval Ordnance Laboratory's wind tunnels.

R. E. ODENING  
Captain, USN  
Commander

*K.R. Enkenhus*  
K. R. ENKENHUS  
By direction

CONTENTS

	Page
Introduction .....	1
Test Procedures .....	1
Coefficient Equations .....	1
Computer Design .....	2
Circuit Details .....	3
Filters .....	3
$C_N$ and $C_Y$ Circuits .....	3
$C_m$ and $C_n$ Circuits .....	4
$C_l$ and $C_A$ Circuits .....	5
$\alpha$ and $\phi$ Circuits .....	5
qA Controls .....	6
Program Patchpanel .....	6
Computer Use .....	7
References .....	8

ILLUSTRATIONS

Figure	Title
1	Coefficient Computer Basic Circuit
2	Low-Pass Active Filters
3	Normal Force Circuit (Simplified)
4	Pitching Moment Circuit (Simplified)
5	Rolling Moment Circuits
6	Analog Computer, HT No. 8
7	Analog Computer, ST No. 1

TABLE

Table	Title
1	Equations for Aerodynamic Coefficients

## INTRODUCTION

Results of static-stability tests in the NOL wind tunnels are usually given in the form of the six dimensionless aerodynamic coefficients. Fully corrected evaluation of these coefficients is made by the IBM 7090 computer from raw data recorded on the DARE System (Data Acquisition and Recording Equipment) (see ref. (1)).

During a test it is desirable to be able to monitor results in coefficient form; therefore, it has been the practice to compute these coefficients on-line by means of special-purpose analog computers connected in parallel with DARE. Each coefficient is then displayed as a continuous curve on an X-Y plotter as the model under test is moved through a range of angle of attack or roll angle.

This report describes the present-generation computers in detail and some of the operating procedures which are employed in static-stability tests.

## TEST PROCEDURES

During a static-stability test, the various wind forces acting on a model are continuously measured as the model is swept through a range of angle of attack (or roll angle). The "balance" upon which the model is mounted is instrumented with resistance strain gages whose outputs are direct analogs of the forces acting upon them - two gages indicate forces in the pitch plane, two in the yaw plane and one each for roll and drag. It is the output from these six gages, together with positional information, that is recorded digitally by the data system.

## COEFFICIENT EQUATIONS

The aerodynamic coefficient equations which are to be evaluated by the analog computer are listed in Table 1. Standard terminology, as prescribed by reference (2), is used. The mathematical derivations of these equations are given in reference (3).

In these equations the "H" terms are variables representing the outputs from each of the gages and are assumed to be corrected for "zero." The terms A, B, R, S and T represent constants established by the gage factors and physical geometry of the balance, while the qAD terms are functions of model shape and tunnel operating conditions.

The expression for  $\alpha$ , the angle of attack, is given in the Table because it is the independent variable against which the six coefficients are plotted.

In the equations for  $C_L$ ,  $C_A$  and  $\alpha$ , the last four terms of each are corrections to take care of interaction effects and balance deflection. Interactions among the pitch and yaw gages are compensated for electrically by the data system and thus do not enter these equations. Correction for bending of the balance under air load is normally not necessary in the analog computer but is provided for in case extremely light-load balances are used.

Note that the signs associated with each equation are mathematically correct in accordance with the conventions of reference (2). Electrically, however, this may not be the case. In fact the proper polarity for some terms, such as the interactions, can vary from balance to balance and may not be known. The computer then must incorporate means for reversing polarity of each term as well as of the final coefficient.

#### COMPUTER DESIGN

The major design requirements for implementing a computer to solve the coefficient equations are satisfied by a circuit such as shown in Figure 1. This represents a third-generation design based upon the general approach detailed in reference (4). The present computers, however, overcome the deficiencies of earlier versions and provide greater capabilities and versatility.

In addition to the circuits required for computing the six coefficients, two channels are included for indicating model position. Active low-pass filters are incorporated in each channel to suppress transients and pickup noise.



A patchpanel arrangement, together with uncommitted switches and pots, permits a wide choice of output connections to the X-Y plotters. The computer components and operating controls are physically arranged to facilitate accurate set up and operation as well as rapid maintenance and trouble shooting.

## CIRCUIT DETAILS

### Filters

Each transducer signal to the computer is fed through a filter to eliminate any transients or pickup noise. These filters are active second-order low-pass circuits having natural frequencies of either 2 cps or 20 cps, gains of 1 and damping of 0.6. A panel switch is used to select either frequency or to give flat response if desired. Figure 2 shows two configurations of this type filter which give similar transmission characteristics.

For single-input amplifiers the circuit of Figure 2 (b) is employed. As can be seen, this circuit requires more components and gives a phase reversal at its output. A vacuum-tube amplifier is used and resistor  $R_1$  chosen to give sufficiently high input impedance at dc. The feedback resistor,  $R_o$ , is made equal to  $R_1$  so that an overall gain of 1 results.

For both filter configurations, one pair of capacitors is used and frequency selection is made by switching different values of resistors. A damping factor of 0.6 was chosen to give a sharp corner at the cutoff frequency with good response uniformity within the passband.

### $C_N$ and $C_Y$ Circuits

Figure 3 shows a somewhat simplified circuit for computing normal-force coefficients - the circuit for side force is identical. By letting the two segments of the pot represent  $1/A_N$  and  $1/B_N$ , respectively, and the feedback resistor represent  $1/qA$ , it can be seen that the output of the summing

amplifier will be a direct representation of  $C_N$ ; i.e.,

$$C_N = \frac{1}{qA} \left[ \frac{-H_1}{1/A_N} + \frac{H_2}{1/B_N} \right]$$

$$= \frac{1}{qA} \left[ -A_N H_1 + B_N H_2 \right]$$

The negative sign for the output of the forward pitch gage ( $H_1$ ) is obtained by use of an inverter, while the output of the aft pitch gage ( $H_2$ ) is supplied directly. In the event the two gages are not wired to give the same electrical polarity, a switch allows the inverter to be bypassed. An additional inverter at the output is provided to establish proper polarity of  $C_N$  for plotting and for use in setting interaction constants. The output pot provides for a scaling factor to match the grid lines on the plotter paper.

The constants  $A_N$  and  $B_N$  are determined by the sensitivity of the two pitch gages and the spacing between their electrical centers. Since similar gages are used at the two locations, the constants will normally be almost equal and the pot will be very close to center. This is an aid in setting up the computer for use before a test. In the actual circuit padding resistors are used at each end of the pot. These serve the dual purpose of providing greater resolution in setting the  $A_N - B_N$  control and of limiting the maximum gain of the summing amplifier.

#### $C_m$ and $C_n$ Circuits

The equations for pitching and yawing moments are similar in form to the force equations and could, within limits, be solved by the same type of circuit. A severe restriction arises, however, from the nature of the constants  $A_m$  and  $B_m$  or  $A_n$  and  $B_n$ . In addition to gage sensitivity and spacing, these constants are functions of the spacing between each gage and the point about which the moment is to be computed (c.g.). Thus, if the c.g. is located directly over the aft

pitch gage ( $H_2$ ) the constant  $A_m$  becomes zero (and  $B_m = "1"$ ). It can be readily appreciated that the circuit of Figure 3 will not permit setting a factor of "0" without driving the amplifier into overload.

To permit unlimited choice of c.g. location, then, the circuit of Figure 4 was developed. Here the constants are determined by taking proportions of the input signals  $H_1$  and  $H_2$  rather than by series resistors. By ganging the two pots it is seen that as one constant approaches "0" the other approaches "1." Note that it is the ratio of the two constants that is of more significance than the absolute value of either.

Polarity reversing and scaling controls are employed similar to those in the force circuits. The factor "d" which appears in the moment equations is a constant determined by model dimensions and is implicit in the scaling established by the output pot.

#### $C_L$ and $C_A$ Circuits

Two circuits for computing the rolling-moment coefficient are shown in Figure 5 - similar configurations are used to compute the axial-force coefficient. In circuit 5(a) the  $l/qA$  control is actually a form of Kelvin-Varley circuit modified to work into the lower impedances encountered with transistor amplifiers. It has the advantage of requiring one less amplifier than circuit 5(b).

In both circuits shown the interaction terms of the equations, TC (or SC), are summed in the proper mathematical polarity. These factors are obtained from pots across the outputs of the force and moment circuits as shown in Figure 1. The scaled values and electrical polarities are established experimentally for each balance when the computer is set up.

#### $\alpha$ and $\theta$ Circuits

The indicated angle of attack,  $\alpha_1$ , is obtained from a servo driven pot as the model is swept over a prescribed range. In the computer this signal is fed through a filter, driver

amplifier and scaling pot, as shown in Figure 1, and then patched to the X-axis of all plotters in parallel.

As shown in Table 1 the indicated angle of attack can be corrected for bending effects by summing in factors proportional to the pitch coefficients. In addition, if the balance is to be rotated also factors proportional to the yaw coefficients are included. For most balances this bending is small enough to be ignored in the plotted results. The corrections are available in the computer, however, if needed.

The roll angle,  $\phi$ , is also fed through the computer but needs no correction factors. Having both positional signals available from independent channels permits different plotter scales to be set up and rapid switching when a test program includes both  $\alpha$  and  $\phi$  cuts.

#### qA Controls

From Table 1 it can be seen that the term  $l/qA$  is a common factor in all six coefficient equations. The "A" is the cross-section area of the model, while "q" represents a pressure term that is dependent only upon the Mach number for an atmospheric supply tunnel. Once the computer is initially set up for a particular test it is necessary only to change the " $l/qA$ " factor when Mach number is changed.

In both computers the  $l/qA$  factor for all six coefficients is simultaneously set by means of ganged controls. These are arranged to give three decades of adjustment. Where  $l/qA$  is determined by feedback the circuit takes the form of a simple variable resistance - where it is achieved by potentiometer a modified Kelvin-Varley circuit is used to give the necessary three decades.

It should be noted that  $l/qA$  is an arbitrarily scaled quantity in the actual computer set up. The major requirement for such a control is to permit rapid change of scale when more than one Mach number is to be used in a test.

#### PROGRAM PATCHPANEL

Although the computers are special purpose units, they incorporate a degree of operational flexibility through use of

program patchpanels. The patchpanel wiring allows free choice of input and output connections and optional utilization of uncommitted pots and switches. This allows switching between different plotter scales, plotting one coefficient against another, independent use of the filter amplifiers, etc.

#### COMPUTER USE

The two coefficient computers currently in use at the NOL wind tunnels are shown in Figures 6 and 7. The computer associated with Hypersonic Tunnel No. 8, Figure 6, has been completely rebuilt around the vacuum-tube amplifiers of an earlier model. These amplifiers have only single inputs and the circuits were developed accordingly, as described earlier. The computer shown in Figure 7, which serves Supersonic Tunnels Numbers 1 and 2, was designed around transistorized-operational amplifiers, having differential inputs. Both computers normally operate on single-ended signals supplied from the input amplifiers of the main data systems. The outputs normally drive Moseley X-Y plotters.

Detailed instructions for setting up a computer for static-stability tests are beyond the scope of this report. In general, this procedure involves the experimental adjustment of machine constants and scale factors to establish outputs in agreement with previously calculated values. Signals from each of the strain-gage transducers are generated by applying known forces and moments to the balance by means of weights. Scaling is established on the X-Y plots in accordance with the expected variation of the coefficient and the range of model movement. During the actual tunnel blow operation, the computer is fully automatic, the plotters are continuously supplied, the computer outputs and the pens are lowered for plotting by command of the main data systems.

The method of establishing the computer constants from known forces and moments results in extremely accurate computation, and the use of high-quality amplifiers and components insures that the initial adjustments are maintained throughout a test program. The on-line computation capability provided by these computers has proved extremely useful during static-stability tests in the NOL wind tunnels.

REFERENCES

- (1) Willis, J. W., "DARE II Data Acquisition and Recording Equipment," NOLTR 63-281, Unclass (being published)
- (2) Wright, J., "A Compilation of Aerodynamic Nomenclature and Axes Systems," NOLR 1241, Aug 1962 Unclass
- (3) Willis, J. W., "Aerodynamic Coefficient Equations; derivation of," TN 5934, May 1963
- (4) Menzel, W. A., "Computing of Aerodynamic Coefficients from Raw Data with Analog Methods," NAVORD 4532, Oct 1957 Unclass

# NOLTR 64-74



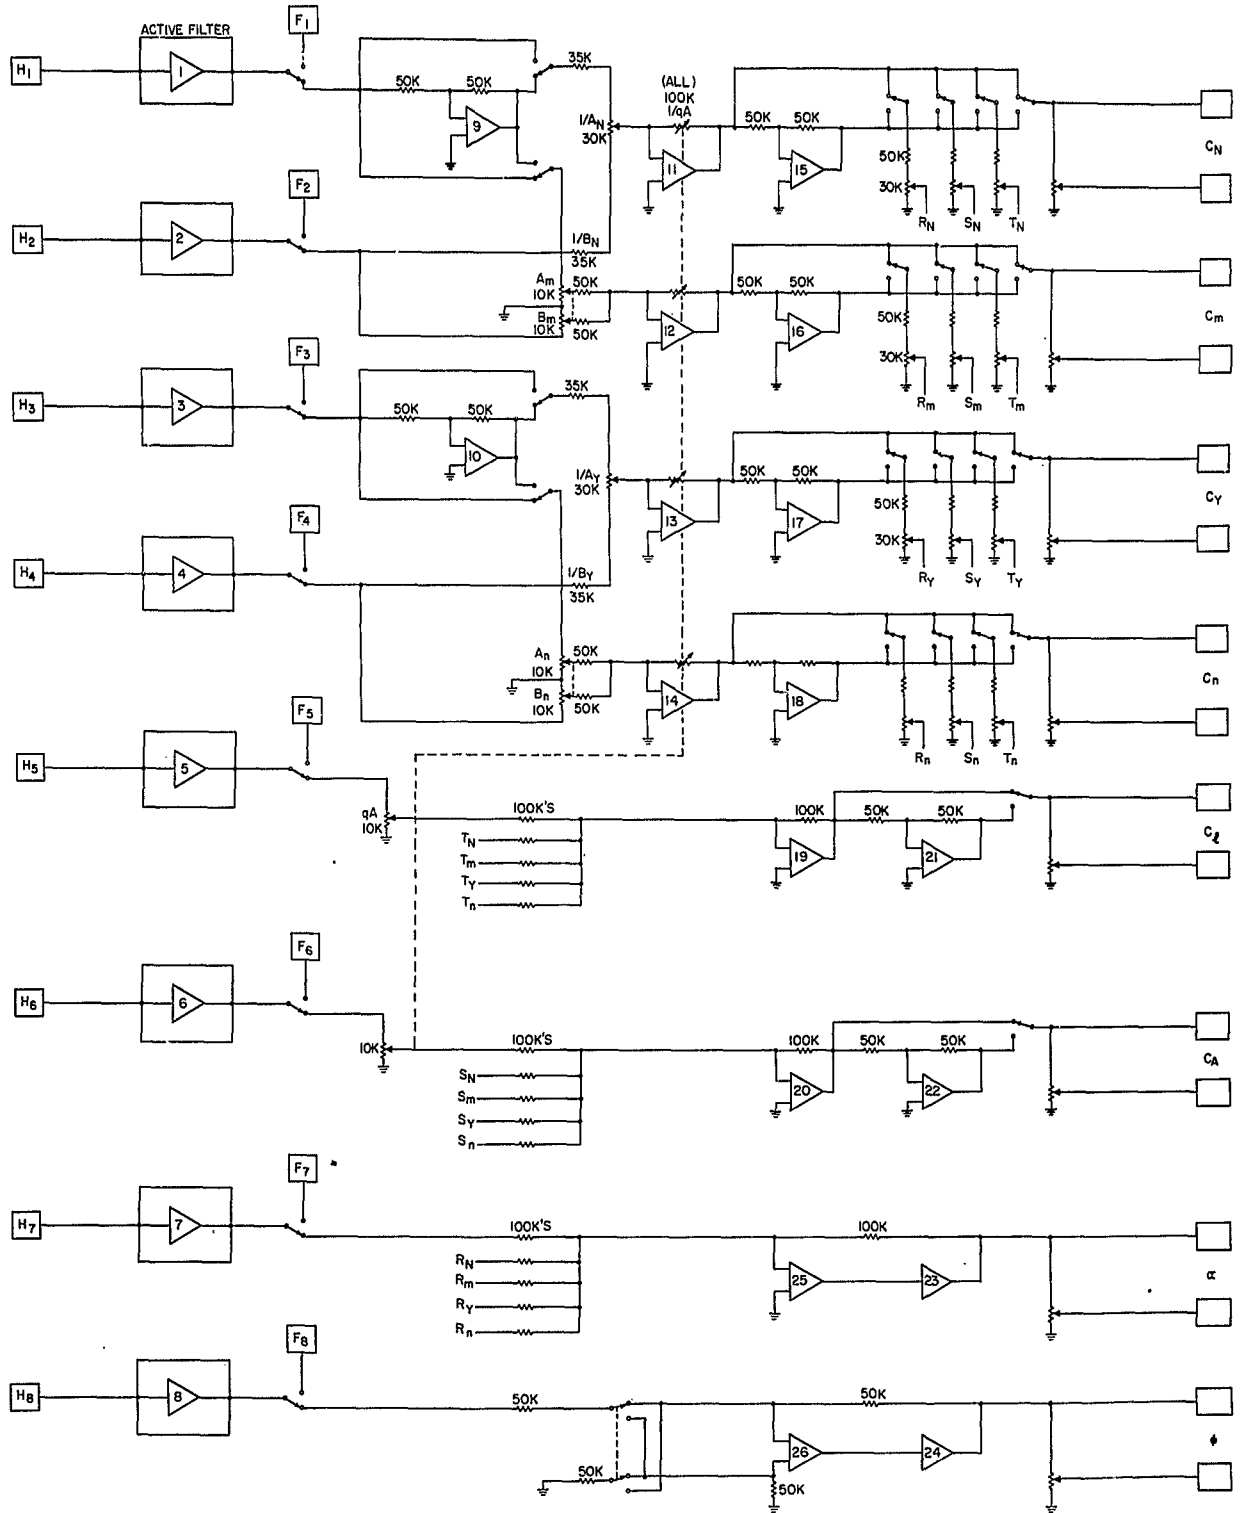


FIG. 1 COEFFICIENT COMPUTER BASIC CIRCUIT

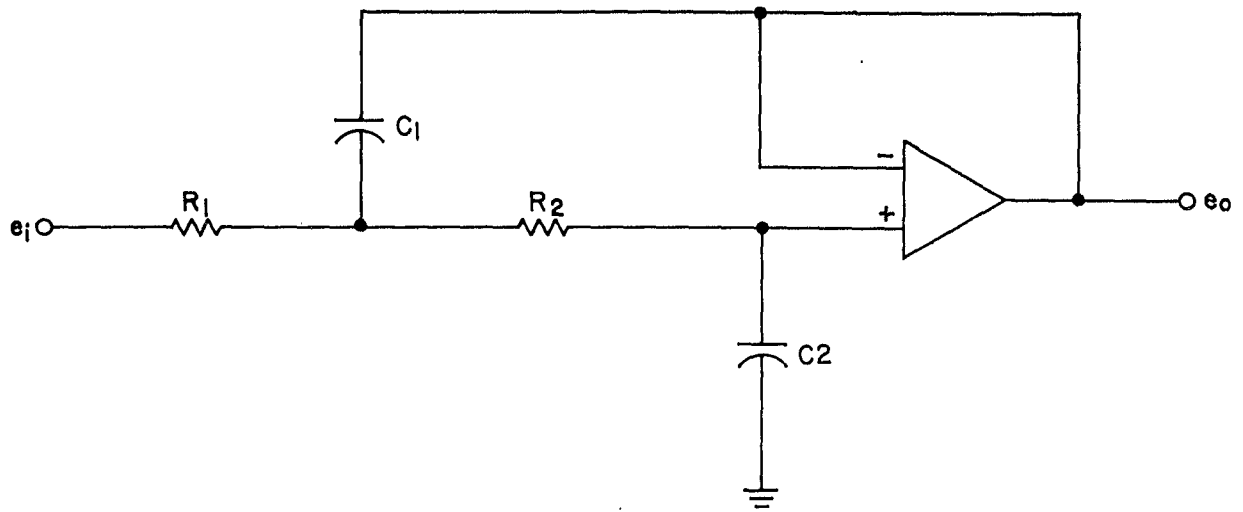

(a) FOR DIFFERENTIAL AMPLIFIER

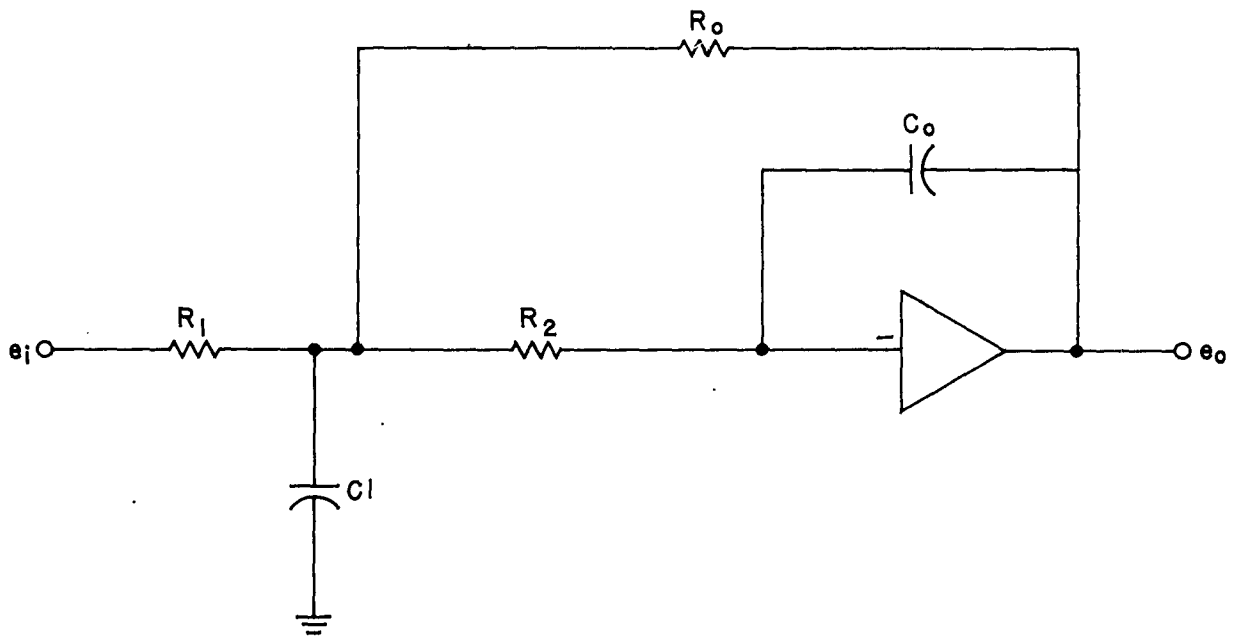

(b) FOR SINGLE-ENDED AMPLIFIER

FIG. 2 LOW-PASS ACTIVE FILTERS



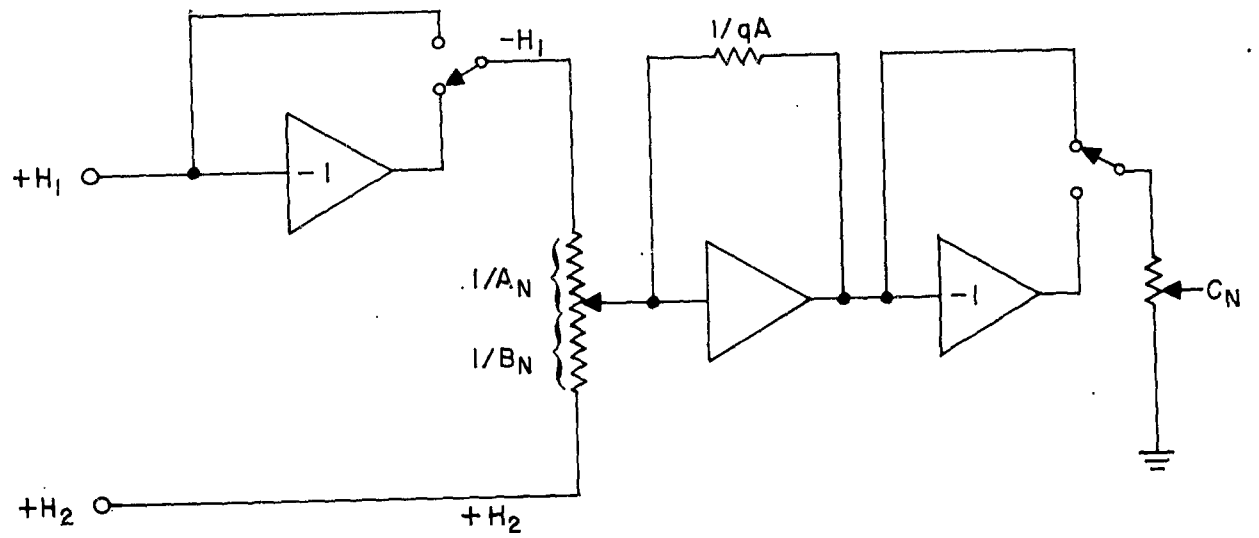


FIG. 3 NORMAL FORCE CIRCUIT (SIMPLIFIED)

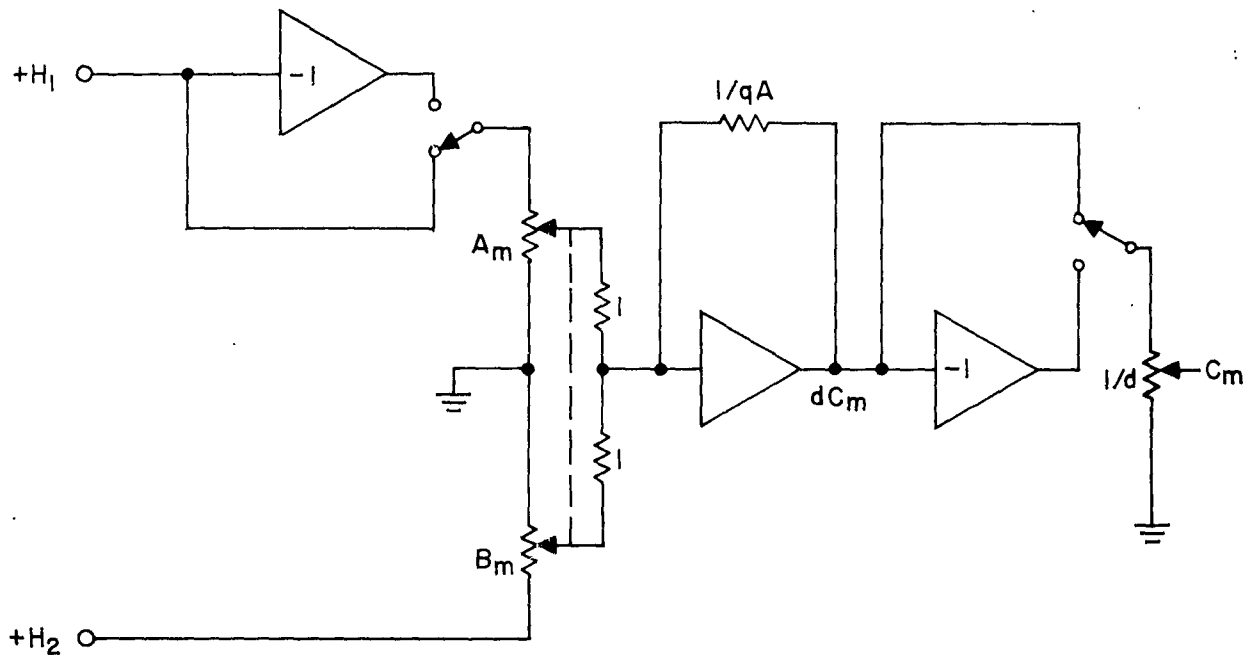


FIG. 4 PITCHING MOMENT CIRCUIT (SIMPLIFIED)

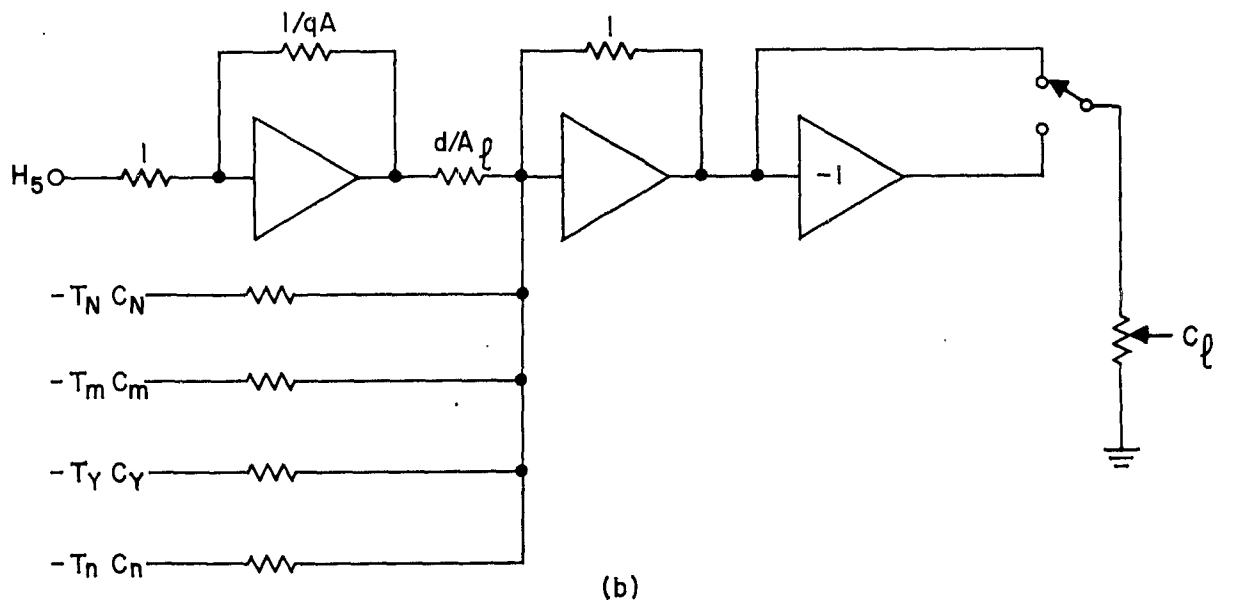
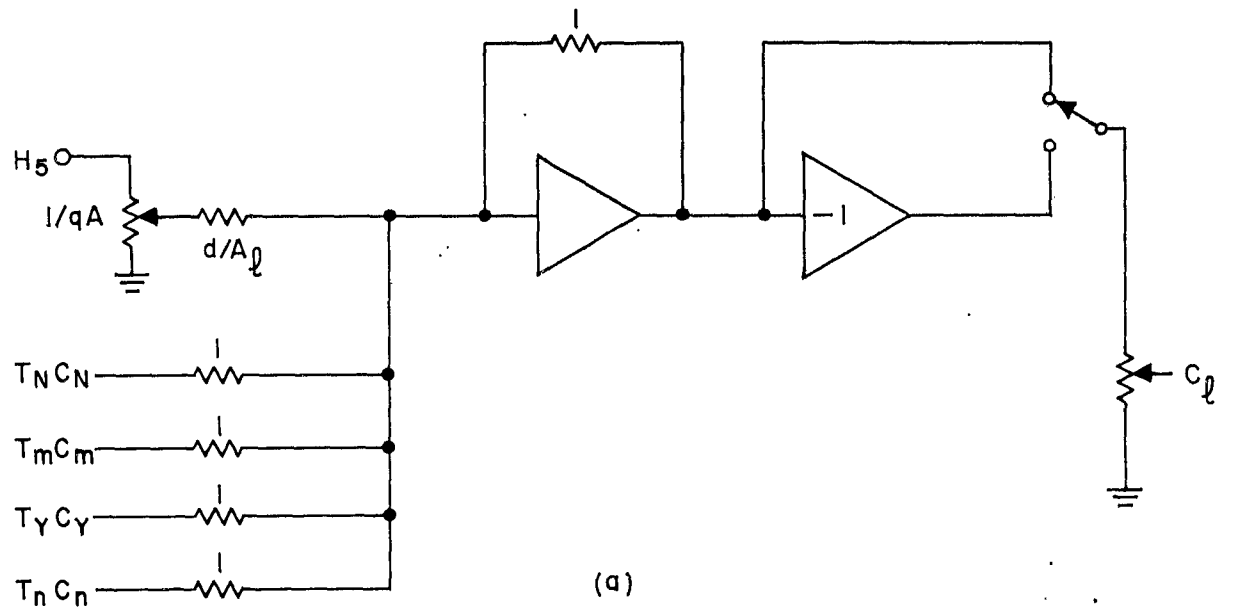


FIG. 5 ROLLING MOMENT CIRCUITS

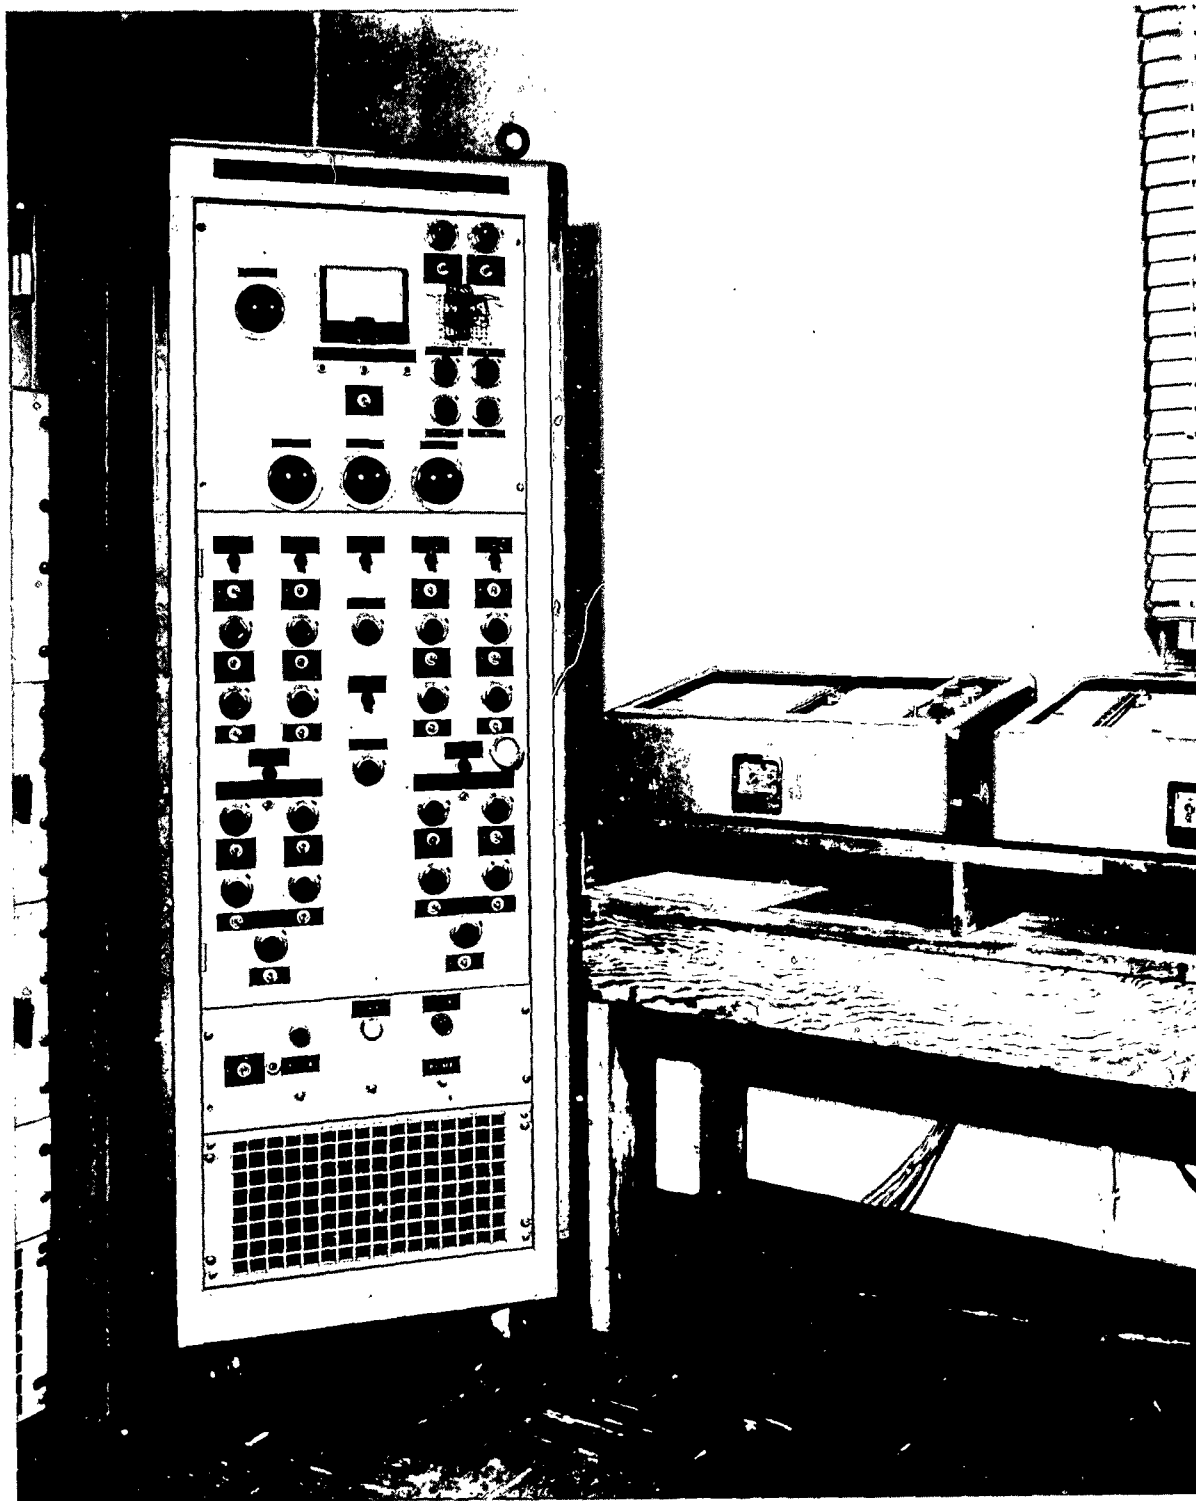


FIG. 6 ANALOG COMPUTER, H. T. NO. 8

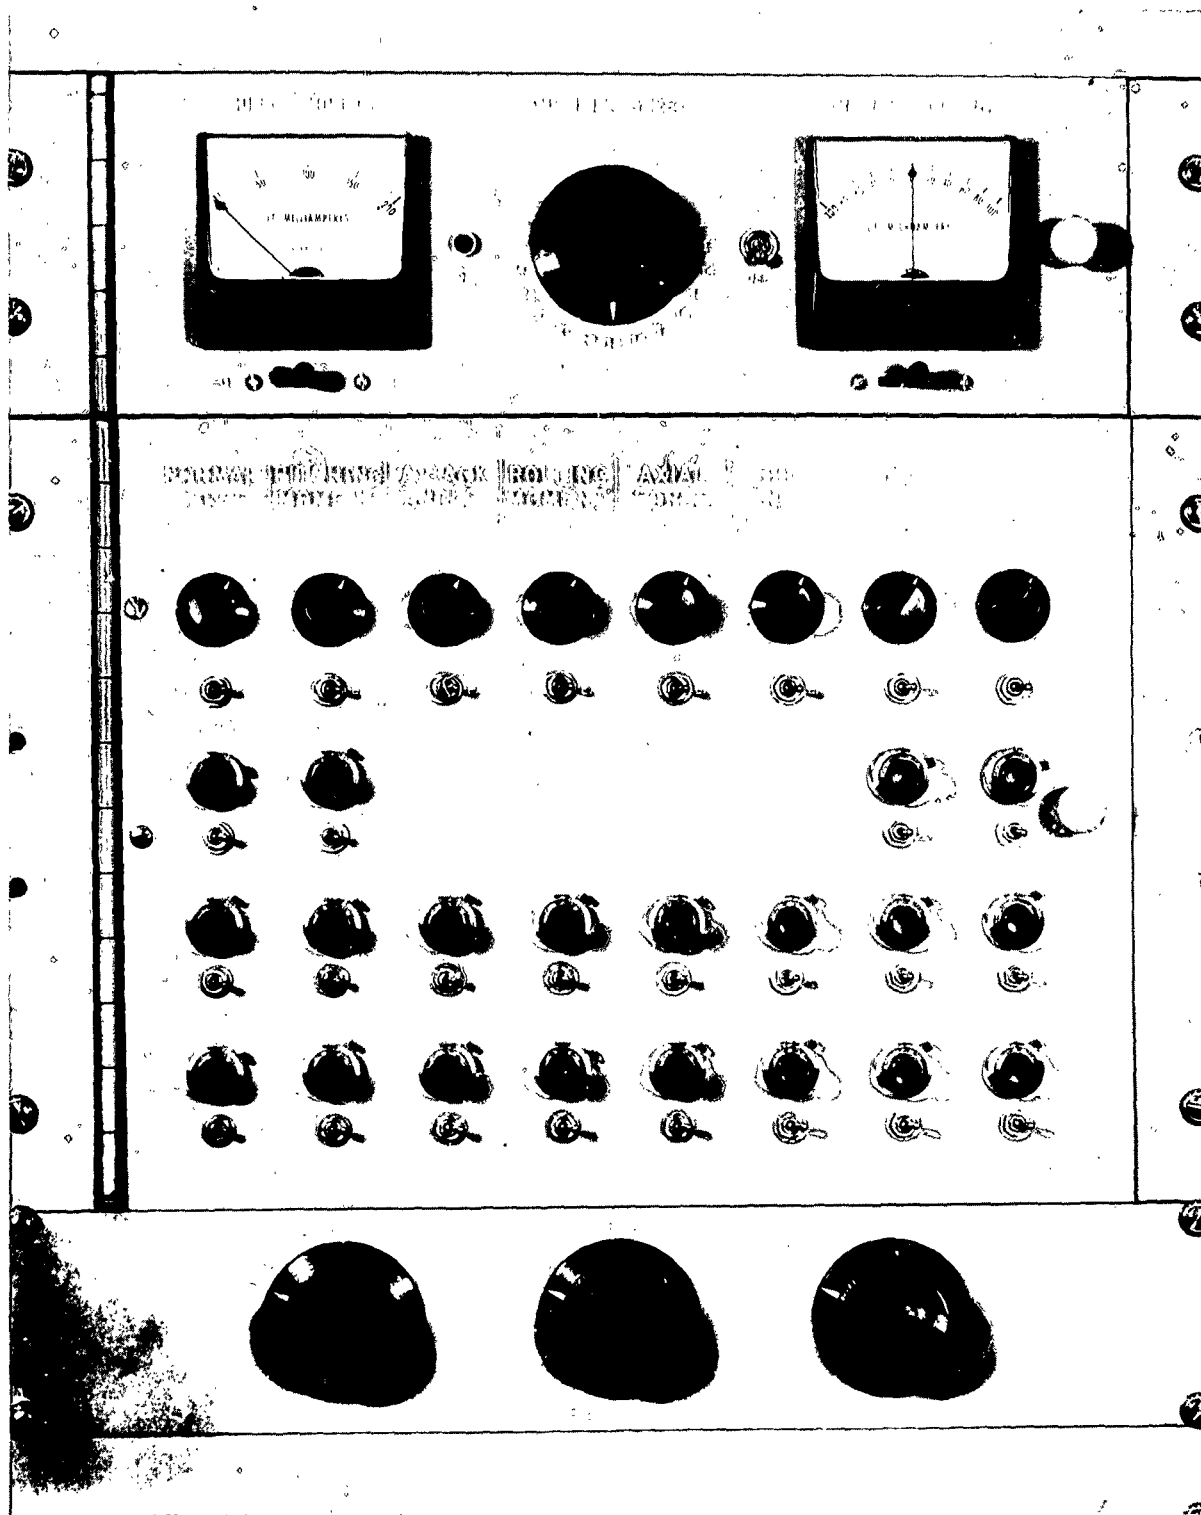


FIG. 7 ANALOG COMPUTER, S.T. NO. 1

TABLE 1

## EQUATIONS FOR AERODYNAMIC COEFFICIENTS

NORMAL FORCE:

$$C_N = \frac{1}{qA} \left[ -A_N H_1 + B_N H_2 \right]$$

PITCHING MOMENT:

$$C_m = \frac{1}{qAd} \left[ +A_m H_1 + B_m H_2 \right]$$

SIDE FORCE:

$$C_Y = \frac{1}{qA} \left[ -A_Y H_3 + B_Y H_4 \right]$$

YAWING MOMENT:

$$C_n = \frac{1}{qAd} \left[ +A_n H_3 + B_n H_4 \right]$$

ROLLING MOMENT:

$$C_l = \frac{1}{qAd} \left[ +A_l H_5 \right] - T_N C_N - T_m C_m - T_Y C_Y - T_n C_n$$

AXIAL FORCE:

$$C_A = \frac{1}{qA} \left[ +A_A H_6 \right] - S_N C_N - S_m C_m - S_Y C_Y - S_n C_n$$

ANGLE OF ATTACK:

$$\alpha = \alpha_i + R_N C_N + R_m C_m + R_Y C_Y + R_n C_n$$

NOLTR 64-74  
AERODYNAMICS DEPARTMENT  
EXTERNAL DISTRIBUTION LIST (A1)

No. of  
Copies

Chief, Bureau of Naval Weapons  
Department of the Navy  
Washington 25, D. C.  
Attn: DLI-30  
Attn: R-14  
Attn: RRRE-4  
Attn: RMGA-811  
Attn: RMMC-42

Office of Naval Research  
Room 2709, T-3  
Washington 25, D. C.  
Attn: Head, Mechanics Branch  
Attn: Head, Fluid Dynamics Branch

Director, David Taylor Model Basin  
Aerodynamics Laboratory  
Washington 7, D. C.  
Attn: Library

Commander, U. S. Naval Ordnance Test Station  
China Lake, California  
Attn: Technical Library  
Attn: Code 406

Director, Naval Research Laboratory  
Washington 25, D. C.  
Attn: Code 2027

Commanding Officer  
Officer of Naval Research  
Branch Office  
Box 39, Navy 100  
Fleet Post Office  
New York, New York

NASA  
High Speed Flight Station  
Box 273  
Edwards Air Force Base, California  
Attn: W. C. Williams

NASA  
Ames Research Center  
Moffett Field, California  
Attn: Librarian

NOLTR 64-74  
AERODYNAMICS DEPARTMENT  
EXTERNAL DISTRIBUTION LIST (A1)

No. of  
Copies

NASA  
Langley Research Center  
Langley Field, Virginia  
Attn: Librarian  
Attn: C. H. McLellan  
Attn: Adolf Busemann  
Attn: Comp. Res. Div.  
Attn: Theoretical Aerodynamics Division

3

NASA  
Lewis Research Center  
21000 Brookpark Road  
Cleveland 11, Ohio  
Attn: Librarian  
Attn: Chief, Propulsion Aerodynamics Div.

NASA  
600 Independence Avenue, S. W.  
Washington 25, D. C.  
Attn: Chief, Division of Research Information  
Attn: Dr. H. H. Kurzweg, Asst. Director of Research

Office of the Assistant Secretary of Defense (R&D)  
Room 3E1065, The Pentagon  
Washington 25, D. C.  
Attn: Technical Library

Research and Development Board  
Room 3D1041, The Pentagon  
Washington 25, D. C.  
Attn: Library

Defense Documentation Center  
Cameron Station  
Alexandria Va 22314

10  
20

Commander, Pacific Missile Range  
Point Mugu, California  
Attn: Technical Library

Commanding General  
Aberdeen Proving Ground, Maryland  
Attn: Technical Information Branch  
Attn: Ballistic Research Laboratory



NOLTR 64-74  
AERODYNAMICS DEPARTMENT  
EXTERNAL DISTRIBUTION LIST (A1)

No. of  
Copies

Commander, Naval Weapons Laboratory  
Dahlgren, Virginia  
Attn: Library

Director, Special Projects  
Department of the Navy  
Washington 25, D. C.  
Attn: SP-2722

Director of Intelligence  
Headquarters, USAF  
Washington 25, D. C.  
Attn: AFOIN-3B

Headquarters - Aero. Systems Division  
Wright-Patterson Air Force Base  
Dayton, Ohio  
Attn: WWAD  
Attn: RRLA-Library

2

Commander  
Air Force Ballistic Systems Division  
Norton Air Force Base  
San Bernardino, California  
Attn: BSRVA

2

Chief, Defense Atomic Support Agency  
Washington 25, D. C.  
Attn: Document Library

Headquarters, Arnold Engineering Development Center  
Air Research and Development Center  
Arnold Air Force Station, Tennessee  
Attn: Technical Library  
Attn: AEOR  
Attn: AEOIM

Commanding Officer, Harry Diamond Laboratories  
Washington 25, D. C.  
Attn: Library, Room 211, Bldg. 92

Commanding General  
U. S. Army Missile Command  
Redstone Arsenal  
Redstone Arsenal, Alabama  
Attn: Mr. N. Shapiro (AMSMI-RR)  
Attn: Redstone Scientific Information Center (AMSMI-RB)

NOLTR 64-74  
AERODYNAMICS DEPARTMENT  
EXTERNAL DISTRIBUTION LIST (A1)

No. of  
Copies

NASA  
George C. Marshall Space Flight Center  
Huntsville, Alabama  
Attn: Dr. E. Geissler  
Attn: Mr. T. Reed  
Attn: Mr. H. Paul  
Attn: Mr. W. Dahm  
Attn: Mr. H. A. Connell  
Attn: Mr. J. Kingsbury  
Attn: ORDAB-DA

APL/JHU (C/NOW 7386)  
8621 Georgia Avenue  
Silver Spring, Maryland  
Attn: Technical Reports Group  
Attn: Mr. D. Fox  
Attn: Dr. F. Hill  
Via: INSORD

2

Air Force Systems Command  
Scientific & Technical Liaison Office  
Room 3710, Main Navy  
Department of the Navy  
Washington 25, D. C.  
Attn: Alonzo P. Mercier

Aeronautical Research Laboratories  
Wright-Patterson Air Force Base  
Ohio

Attn: E. G. Johnson, ARF,  
Fluid Dynamics Facilities Laboratory  
Building 450

ARO, Inc.  
Arnold Air Force Station  
Tennessee

Attn: Rudolph W. Hensel, Chief  
Propulsion Wind Tunnel

ARO, Inc.  
von Karman Gas Dynamics Facility  
Arnold Air Force Station,  
Tennessee

Attn: J. Lukasiewicz, Chief

Aeronautical Systems Division  
Air Force Systems Command  
United States Air Force  
Wright-Patterson Air Force Base  
Ohio

Attn: ASD/D. Zonars

Ames Research Center  
NASA  
Moffett Field, California  
Attn: Victor I. Stevens

Astro  
The Marquardt Corporation  
16555 Saticoy  
Van Nuys, California  
Attn: R. C. Miller

Ballistic Research Laboratories  
United States Army  
Aberdeen Proving Ground, Maryland  
Attn: C. C. Bush, Chief, Operations Section  
Supersonic Wind Tunnels Branch  
Exterior Ballistic Laboratory

The Boeing Company  
Aero-Space Division  
P. O. Box 3707  
Seattle 24, Washington  
Attn: J. H. Russell (58-82)  
Chief Wind Tunnel Engineer

California Institute of Technology  
Jet Propulsion Laboratory  
4800 Oak Grove Drive  
Pasadena 3, California  
Attn: Robert E. Covey, Chief  
Aerodynamic Facilities

Chance Vought Corporation  
P. O. Box 5907  
Dallas 22, Texas  
Attn: R. C. McWherter, Chief  
Wind Tunnel Laboratories

Cornell Aeronautical Laboratory, Inc.  
4455 Genessee Street  
P. O. Box 235  
Buffalo 21, New York  
Attn: J. Martin  
Applied Hypersonic Research Department

David Taylor Model Basin  
Department of the Navy  
Aerodynamics Laboratory  
Washington 7, D. C.  
Attn: Dr. S. De Los Santos  
Head, Gas Dynamics Division

Douglas Aircraft Company, Inc.  
Aerophysics Laboratory (Loc. A-10)  
3000 Ocean Park Boulevard  
Santa Monica, California  
Attn: J. F. L. Aldrich, Branch Chief  
Aerophysics Laboratory

General Dynamics/Fort Worth  
P. O. Box 748  
Fort Worth 1, Texas  
Attn: R. A. Stevens  
Aerothermodynamics Group Engineer  
Mail Zone E-62

General Dynamics/Convair  
P. O. Box 1950  
San Diego, California (92112)  
Attn: D. P. Cumming, Group Engineer  
High Speed Wind Tunnel  
Mail Zone 61-10

Grumman Aircraft Engineering Corporation  
Bethpage, Long Island  
New York  
Attn: W. Gander, Head  
Aero Test Operations Group

Lockheed-California Company  
A Division of Lockheed Aircraft Corporation  
P. O. Box 551  
Burbank, California  
Attn: G. Sim, Division Engineer  
Fluid Dynamics Laboratory

Lockheed-Georgia Company  
A Division of Lockheed Aircraft Corporation  
Marietta, Georgia  
Attn: J. B. Cumming, Manager  
Experimental Fluid Dynamics  
Department 72-07, Building B-2

Lockheed Missiles and Space Company  
3251 Hanover Street  
Palo Alto, California  
Attn: Dr. Daniel Bershader  
Department 52-10

Marshall Space Flight Center  
NASA  
Huntsville, Alabama  
Attn: A. R. Felix  
M-AERO-E

The Martin Company  
Space Systems Division  
Baltimore 3, Maryland  
Attn: L. G. Cooper, Supervisor  
Experimental Fluid Mechanics

Massachusetts Institute of Technology  
Department of Aeronautics and Astronautics  
Naval Supersonic Facility  
560 Memorial Drive  
Cambridge 39, Massachusetts  
Attn: Mr. William F. Byrne

McDonnell Aircraft Corporation  
P. O. Box 516  
St. Louis 66, Missouri  
Attn: F. M. Keyes, Group Manager  
Polysonic Wind Tunnel

Northrop Norair Division  
3901 W. Broadway  
Hawthorne, California (90250)  
Attn: P. F. Jensen, Chief  
Research Laboratories Group 3740-64

North American Aviation, Inc.  
Los Angeles Division  
International Airport  
Los Angeles, California (90009)  
Attn: G. M. Stone, Jr.  
Chief, Aero Thermo Laboratories

The Ohio State University  
Aerodynamics Laboratory  
Department of Aeronautical and Astronautical Engineering  
Columbus 10, Ohio  
Attn: Dr. J. D. Lee, Director

No. of  
Copies

Polytechnic Institute of Brooklyn  
Aerodynamics Laboratory  
527 Atlantic Avenue  
Freeport, Long Island  
New York  
Attn: R. Cresci

Princeton University  
The James Forrestal Research Center  
Gas Dynamics Laboratory  
Princeton, New Jersey  
Attn: Prof. Seymour M. Bogdonoff

Republic Aviation Corporation  
Farmingdale, Long Island  
New York  
Attn: A. Cravero, Assistant to Chief  
Hyper-Aerodynamics  
Paul Moore Research Center

Sandia Corporation  
Sandia Base  
Albuquerque, New Mexico  
Attn: Alan Pope, Head  
Aero-Thermodynamics Department - 7420

Department of Aeronautics and Astronautics  
Stanford University  
Stanford, California  
Attn: James B. Kyser

United Aircraft Corporation  
Research Laboratories  
400 Main Street  
East Hartford 8, Connecticut  
Attn: George D. Dickie, Jr., Head,  
Test Facilities

University of Michigan  
Aeronautical Engineering Laboratories  
Aircraft Propulsion Laboratory  
North Campus  
Ann Arbor, Michigan  
Attn: Prof. P. Sherman

University of Southern California  
Engineering Center  
Aeronautic Laboratories Department  
P. O. Box 1001  
Oxnard, California  
Attn: J. H. Carrington  
Chief Engineer



CATALOGING INFORMATION FOR LIBRARY USE

BIBLIOGRAPHIC INFORMATION			
DESCRIPTORS	CODES	DESCRIPTORS	CODES
NOL technical report	NOLTR	Unclassified - 16	UØ16
64-74	64ØØ74		
21 April 1964	Ø464		

SUBJECT ANALYSIS OF REPORT			
DESCRIPTORS	CODES	DESCRIPTORS	CODES
Computers	COMP	Equations	EQUA
Evaluation	EVAL	Computer (Design)	COMPD
Aerodynamic	AERD	Circuit	CIRC
Coefficients	COEF	Filters	FILT
Analog	ANAG		
Computations	COMA		
Displays	DISL		
Static	STAC		
Stability	STBI		
Testing	TEST		
Wind tunnels	WINU		
Test procedures	TESI		

<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 64-74) ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis. 21 April 1964. 8p. illus., diagrs., tables. (Aerodynamics research report 225) BuWeys task RMMO-42-009/212-1/FO08-09-01.</p> <p style="text-align: center;">UNCLASSIFIED</p> <p>During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>
<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 64-74) ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis. 21 April 1964. 8p. illus., diagrs., tables. (Aerodynamics research report 225) BuWeys task RMMO-42-009/212-1/FO08-09-01.</p> <p style="text-align: center;">UNCLASSIFIED</p> <p>During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>
<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 64-74) ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis. 21 April 1964. 8p. illus., diagrs., tables. (Aerodynamics research report 225) BuWeys task RMMO-42-009/212-1/FO08-09-01.</p> <p style="text-align: center;">UNCLASSIFIED</p> <p>During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>
<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 64-74) ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis. 21 April 1964. 8p. illus., diagrs., tables. (Aerodynamics research report 225) BuWeys task RMMO-42-009/212-1/FO08-09-01.</p> <p style="text-align: center;">UNCLASSIFIED</p> <p>During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>	<p>1. Wind tunnels - Aerodynamics Computers Coefficients, Aerodynamic Title I. Willis, Joseph W. II. Series III. Project IV. Project</p> <p>Abstract card is unclassified.</p>

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 64-74)  
ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis.  
21 April 1964. 8p. illus., diagrs., tables.  
(Aerodynamics research report 225) BuWeys  
task RMMO-42-009/212-1/FO08-09-01.

UNCLASSIFIED

During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.

1. Wind tunnels - Aerodynamics Computers
2. Coefficients, Aerodynamic
- I. Title
- II. Willis, Joseph W.
- III. Series
- IV. Project

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 64-74)  
ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis.  
21 April 1964. 8p. illus., diagrs., tables.  
(Aerodynamics research report 225) BuWeys  
task RMMO-42-009/212-1/FO08-09-01.

UNCLASSIFIED

During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.

1. Wind tunnels - Aerodynamics Computers
2. Coefficients, Aerodynamic
- I. Title
- II. Willis, Joseph W.
- III. Series
- IV. Project

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 64-74)  
ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis.  
21 April 1964. 8p. illus., diagrs., tables.  
(Aerodynamics research report 225) BuWeys  
task RMMO-42-009/212-1/FO08-09-01.

UNCLASSIFIED

During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.

1. Wind tunnels - Aerodynamics Computers
2. Coefficients, Aerodynamic
- I. Title
- II. Willis, Joseph W.
- III. Series
- IV. Project

Abstract card is unclassified.

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 64-74)  
ANALOG COMPUTERS FOR THE EVALUATION OF AERODYNAMIC COEFFICIENTS (U), by Joseph W. Willis.  
21 April 1964. 8p. illus., diagrs., tables.  
(Aerodynamics research report 225) BuWeys  
task RMMO-42-009/212-1/FO08-09-01.

UNCLASSIFIED

During static-stability tests in the U. S. Naval Ordnance Laboratory's wind tunnels, it is desirable to have the six aerodynamic coefficients computed on-line. This report describes the special-purpose analog computers designed to make these computations and display the results.

1. Wind tunnels - Aerodynamics Computers
2. Coefficients, Aerodynamic
- I. Title
- II. Willis, Joseph W.
- III. Series
- IV. Project

Abstract card is unclassified.