

466300

Unclassified

(1)


Defense Documentation Center

Defense Supply Agency

Cameron Station • Alexandria, Virginia

AD NO.

**DDA
DCS
DSC**

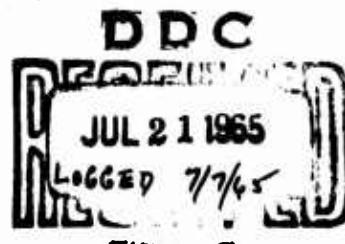

Unclassified

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

UNCLASSIFIED

AD 466300

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION ALEXANDRIA, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

U. S. A R M Y
TRANSPORTATION RESEARCH COMMAND
FORT EUSTIS, VIRGINIA

TREC TECHNICAL REPORT 50-53

**TWO-DIMENSIONAL WIND-TUNNEL TESTS
of an H-34
MAIN ROTOR AIRFOIL SECTION**

Project 9R38-11-009-04

Contract DA 44-177-TC-657

September 1960

Prepared by :

United Aircraft Corporation
Sikorsky Aircraft Division
Stratford, Connecticut



(18) TKT - M
(17) TR-5U-52

Project 9R38-11-0091-04
(15) Contract DA 44-177-TC-657,

(11) September, 1960,
(12) 13 p.

(6) TWO-DIMENSIONAL WIND TUNNEL TESTS OF AN
H-34 MAIN ROTOR AIRFOIL SECTION.

(9) Technical rept.,

(14) Report No. SER-58304
#

Prepared by:

HEMMED AIRCRAFT CORPORATION
(5) SIKORSKY AIRCRAFT CORPORATION
Stratford, Connecticut

(10) by Alfred A. Light

for

U. S. Army Transportation Research Command
Fort Eustis, Virginia

Prepared by:

Alfred A. Lizak

**UNITED AIRCRAFT CORPORATION
SIKORSKY AIRCRAFT DIVISION**

CONTENTS

List of Illustrations	iv
List of Symbols	v
Summary	1
Introduction	2
Test Equipment and Procedure	3
Data Reduction and Accuracy	4
Presentation of Results	5
References	7
Appendix I - Tabulated Force and Moment Coefficients; C_L , C_D , C_m (supplementary data)	55
Appendix II - Tabulated Pressure Coefficients, C_p	57

ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	Two-Dimensional Airfoil Testing Facilities.....	9
2	H-34 Wind Tunnel Model.....	10
3	Airfoil Contour in Comparison to NACA 0012 Section.....	11
4	Variation of Reynolds Number with Mach Number.....	12
5-20	Static Pressure Distribution Over Airfoil Surface, Trailing Edge Tab not Deflected.....	13
21-32	Static Pressure Distribution Over Airfoil Surface, Trailing Edge Tab Deflected.....	29
33-40	Variation of Lift, Drag, and Pitching Moment Coefficient with Angle of Attack, Trailing Edge not Deflected: Mach Numbers = 0.30, 0.40, 0.50, 0.60, 0.65, 0.70, 0.75, 0.80.....	41
41-46	Variation of Lift, Drag, and Pitching Moment Coefficient with Angle of Attack, Trailing Edge Tab Deflected: Mach Numbers = 0.30, 0.40, 0.50, 0.60, 0.70, 0.80.....	49

LIST OF SYMBOLS

c	Airfoil chord, feet
p _l	Static pressure measured on airfoil lower surface, psf
p _o	Free stream static pressure
p _u	Static pressure measured on airfoil upper surface, psf
q ₀	Dynamic pressure $1/2 \rho v^2$
x	Chordwise distance from leading edge, feet
C _D	Section drag coefficient, D/q ₀ S
C _L	Section lift coefficient, L/q ₀ S
c _L	Approximate section lift coefficient, C _N cos α
C _m	Section pitching moment coefficient, M _C /4/q ₀ Sc
C _N	Normal force coefficient, $C_N = \int_0^c -(C_{pu} - C_{pl})d(x/c)$
C _{pu}	Pressure coefficient, upper surface, (p _u -p _o)/q ₀
C _{pl}	Pressure coefficient, lower surface, (p _l -p _o)/q ₀
D	Drag, pounds
L	Lift, pounds
M _C /4	Pitching moment about quarter chord line, foot-pounds
S	Airfoil plan area, square feet
V	Wind tunnel velocity, fps
α	Corrected angle of attack, degrees
ρ	Density of air, slugs per cubic foot
μ	Dynamic viscosity, slugs per foot second

LIST OF SYMBOLS (cont'd)

Symbol Definitions for Tabulated IBM Pressure Coefficient Data, App. II

A	Corrected angle of attack, degrees
AU	Uncorrected angle of attack, degrees
C	Airfoil chord, feet
CP	Pressure Coefficient
L	Lower surface
M	Corrected Mach Number
MU	Uncorrected Mach Number (nominal)
PO	Free stream static pressure, psf
QO	Dynamic pressure, psf
U	Upper surface
X	Chordwise distance from leading edge, feet

SUMMARY

Tests were conducted in the two-dimensional channel of the United Aircraft Corporation 8 foot wind tunnel at Mach Numbers from 0.30 to 0.80 to determine the surface pressure distributions on a Sikorsky H-34 main rotor production blade section. Twenty-nine static pressure taps were located on the upper and lower surfaces of the model. In addition three component force and moment measurements, were obtained, along with a limited amount of wake survey drag data. The pressure coefficients are tabulated for each Mach Number and angle of attack. The variation of force and moment coefficient with angle of attack at each Mach Number is also included. As the data are intended primarily for use by the National Aeronautics and Space Administration, no detailed analysis has been made of the results of this test program.

INTRODUCTION

Sikorsky Aircraft, under sponsorship of the U. S. Army Transportation Research Command, USA TRECUM, (Reference 1), has recently instrumented a full scale H-34 rotor blade with miniature electrical pressure transducers to permit the measurement of surface pressure distributions at various radial stations. The aircraft will be flight tested by the National Aeronautics and Space Administration to obtain instantaneous air loads on a full scale rotor in flight.

A previous wind tunnel investigation of rotor blade aerodynamic loading conducted by the NACA (References 2 and 3) showed that for a thorough evaluation of the three dimensional effects that are present on a rotor blade in flight, a knowledge of the steady-state two-dimensional pressure distributions on the same airfoil section was required as a reference. A similar basis for analysis is even more necessary for the flight test program referred to above for two reasons. First, the test is to be conducted on a production rotor blade with certain physical deviations from a true NACA 0012 profile, and consequent differences in surface pressure distributions from published data on the 0012 airfoil. Secondly, adequate pressure loading data are not available even on a true 0012 profile, in the Mach Number and angle of attack range which will be encountered in flight test.

The purpose of the present program therefore was to obtain chordwise static pressure distributions on a Sikorsky H-34 helicopter production main rotor blade section. As an addition to the primary purpose of the program, three component force and moment data, along with limited wake survey drag measurements were obtained.

This work was performed under the sponsorship of USA TRECUM, contract DA 44-177-TC-657. The results of this investigation will be used in the evaluation of the flight test data obtained from the full scale H-34 test described above.

TEST EQUIPMENT AND PROCEDURE

DESCRIPTION OF TEST FACILITY

The United Aircraft Corporation two-dimensional channel is composed of a special insert in the U. A. C. large subsonic wind tunnel. This wind tunnel is powered by a 9,000 horsepower motor and has interchangeable octagonal test sections of 8 feet and 18 feet across the flats. The two-dimensional airfoil test channel consists of two identical sidewalls which are inserted in the 8-foot octagonal test section to form a rectangular test region and two trapezoidal outer passages (see Figure 1). The channel, 125 inches long, provides a test section 93 inches high and 33 inches wide. Airfoils are mounted with their pitching axis 66 inches downstream of the channel leading edge to insure minimum effect of model attitude on test section velocity. Linkages and support struts connected to the electro-mechanical balance beneath the tunnel extend up through the hollow sidewalls and are attached to the model spar by end fittings. The mechanical balance measures lift and drag forces directly. A Baldwin-Lima-Hamilton bending beam equipped with strain gages is used to obtain pitching moment. A wake survey rake had been installed for a previous test and was used to afford an alternate means of obtaining drag measurements. It consisted of 46 total pressure tubes and 2 static pressure tubes located 39 inches downstream of the model supports.

DESCRIPTION OF MODEL

The model was made from an untwisted portion of a production Sikorsky H-34 main rotor blade, consisting of an extruded spar and three trailing edge pockets. The outer two trailing edge pockets were formed of bonded "honeycomb" covered with a sheet aluminum skin. The center pocket construction consisted of one stainless steel rib in the center of the pocket and four aluminum ribs, evenly spaced and covered with sheet aluminum skin. This center pocket construction provided the space necessary for the installation of the twenty-nine surface static pressure taps consisting of .0625 inch diameter stainless steel tubing, which in turn were plumbed to a manometer board. The pressure orifices were located at half span at the following stations (upper and lower surfaces), expressed in percent of chord: 0, 0.8, 1.7, 4.0, 6.5, 9.0, 13.0, 16.8, 23.3, 33.5, 50.0, 62.5, 76.9, 91.5, and 96.0. The trailing edge pocket was then filled with plastic foam to stiffen the skin and prevent any possibility of panel flutter at severe loading conditions. The model has a total chord of 16.4 inches and a span of 32.70 inches, with an NACA 0012 profile based on a chord of 16.0 inches, modified by a 0.4 inch trailing edge tab extension .096 inches thick. (This trailing edge tab may be deflected upward to approximately a three degree angle during production testing of the full scale blade to assure proper track and balance). A view of the instrumented blade section is shown in figure 2, and a comparison of the contour at half-span of the test airfoil with the contour of a true NACA 0012 section is presented in figure 3.

TEST PROCEDURE

The model was tested at nominal Mach Numbers of 0.30, 0.40, 0.50, 0.60, 0.65, 0.70, 0.75, and 0.80, at angles of attack ranging from -4 degrees to 26 degrees at the lowest Mach Numbers. The maximum angles of attack at the higher Mach Numbers were limited by the tunnel power available. The Reynolds Numbers corresponding to the test conditions are shown in figure 4.

The model was also tested with the trailing edge tab deflected upwards at the standard production test angle at Mach Numbers of 0.30, 0.40, 0.50, 0.60, 0.70, and 0.80. This was done to obtain data to aid in the evaluation of results from the full scale rotor blade test, for which the trailing edge tab was deflected for a short spanwise distance near the tip to provide proper track and balance.

The static pressures on the model were recorded by photographing a mercury manometer board. The values of force balance lift, drag, and pitching moment were manually recorded. A wake survey rake had been installed in the test section for use in the preceding test program, and the pressures obtained during the early portion of the present test were recorded to afford a check on the drag obtained with the balance. However, the wake rake supports failed after a Mach Number of .6 was obtained and no further data could be acquired.

DATA REDUCTION AND REPEATABILITY

REDUCTION OF DATA

The magnitude of the manometer tube pressures were recorded on IBM cards by means of a manually operated electro-mechanical film reader. An IBM 704 electronic data processing machine program was then used to compute the corrected pressure coefficient, corrected Mach Number, and corrected angle of attack.

The force balance data were immediately reduced to corrected coefficient form by the use of a small electronic computer. The force coefficient data were continuously plotted to produce a current record of the results during the program.

The wake drag data were reduced using the tables and charts of Reference 4. This method assumes that the wake drag coefficient is proportional to the total head loss in the airfoil wake, and further assumes that the variation of total head loss across the wake has the typical form (resembling a cycle of a cosine squared curve).

Tunnel wall corrections were applied to all the foregoing data using the equations of Reference 5.

REPEATABILITY OF DATA

Previous tunnel balance calibrations have shown the balance to be repeatable to ± 1.25 pounds of lift, ± 0.3 pounds of drag, and ± 1.5 foot pounds of pitching moment for steady loads. The average zero shift for all runs was ± 0.8 pounds of lift, ± 0.5 pounds of drag, and ± 0.5 foot pounds of pitching moment.

The estimated average variations in aerodynamic parameters with Mach Number, as determined from analysis of the present data, are shown in the following tabulation:

Nominal Mach Number	<u>0.4</u>	<u>0.6</u>	<u>0.8</u>
M	$\pm .003$	$\pm .002$	$\pm .002$
α	± 20 min.	± 20 min.	± 20 min.
C_p	$\pm .026$	$\pm .014$	$\pm .009$
C_L	$\pm .010$	$\pm .006$	$\pm .004$
C_D	$\pm .0013$	$\pm .0010$	$\pm .0010$
C_m	$\pm .003$	$\pm .001$	$\pm .001$

Although all of the data obtained during the test have been presented for the sake of completeness, care should be taken in interpreting the data at high angles of attack due to possible interference caused by the tunnel walls. Discrepancies between the force balance and wake survey drag coefficients are discussed in the section entitled "Presentation of Results."

PRESNTATION OF RESULTS

A portion of the pressure data has been plotted in the form of surface pressure coefficient versus chordwise distance from the airfoil leading edge at four angles of attack for each of eight Mach Numbers. Figures 5 through 20 present these data obtained with zero tab deflection and figures 21 through 32 present similar data for the production tab deflection.

The force and moment data are presented in figures 33 through 46 in the form of lift, drag, and pitching moment coefficient versus angle of attack. Figures 33 through 40 present data obtained at the various Mach Numbers with no trailing edge tab deflection. To afford a correlation between the measured lift coefficients and the pressure coefficients a certain amount of the plotted pressure distributions were integrated to yield the normal force coefficient. Multiplying this normal force coefficient by the cosine of the airfoil angle of attack yields an approximate C_L which was then plotted on the curves obtained with the force balance. The agreement is generally quite reasonable although the approximate lift coefficients determined from the integrated pressures are frequently less than the balance data.

Figures 33 to 36 also compare the drag coefficients as determined from the force balance and those measured by the wake survey rake for those conditions where both measurements were obtained. As discussed in Reference 6, it is inherently difficult to obtain two-dimensional drag data from a force balance, which measures the average drag on the model, where three dimensional effects such as the end gap and the sidewall boundary layer are present. Therefore, the wake survey data are more representative of the true two-dimensional drag forces at low angles of attack. At high angles of attack or in the presence of shocks however, the procedure used to compute the drag can lead to excessive errors. Inasmuch as the wake survey data were limited to but a few conditions, both sources of data are presented for the sake of completeness. Above a Mach Number of .65 the force balance data agree favorably with previous Sikorsky tests of production airfoil sections.


Figures 41 through 46 present data obtained with the trailing edge tab of the model deflected upward at the standard production test angle, approximately three degrees. Results for those data points which exceed the figure limits are presented in Appendix I. Although no wake survey drag data are available for the deflected tab condition, differences between the balance and the wake survey drags similar to the undeflected tab condition would be expected.

All of the pressure data obtained during the investigation are presented in tabular form in Appendix II in the form of pressure coefficients at each chordwise location. Also listed are the Mach Numbers and angles of attack, both corrected and uncorrected, the dynamic pressure, and the free stream static pressure corrected for tunnel wall effects. The run number is also listed to facilitate correlation of pressure distributions with force balance measurements.

REFERENCES


1. Installation of Instrumentation for Dynamic Airloads on Helicopter Rotor Blades, USA TRECOM Contract DA 44-177-TC-547.
2. Rabbott, John P., Jr., Static Thrust Measurements of the Aerodynamic Loading on a Helicopter Rotor Blade, NACA TN 3688, July, 1956.
3. Rabbott, John P., Jr., and Churchill, Cary B., Experimental Investigation of the Aerodynamic Loading on a Helicopter Rotor Blade in Forward Flight, NACA RM L56I07, October, 1956.
4. Block, M. J., and Katzoff, S., Tables and Charts for the Evaluation of Profile Drag from Wake Surveys at High Subsonic Speeds, NACA RB No. L5F15a, July, 1945.
5. Allen, J. J. and Vincenti, W. G., Wall Interference in a Two-Dimensional Flow Tunnel, with Consideration of the Effects of Compressibility, NACA Report 782, 1944.
6. Loftin, Laurence K. and Smith, Hamilton A., Aerodynamic Characteristics of 15 NACA Airfoil Sections at Seven Reynolds Numbers from 0.7×10^6 to 9.0×10^6 , NACA TN 1945, October, 1956.

FIGURE I. TWO DIMENSIONAL AIRFOIL TESTING FACILITIES

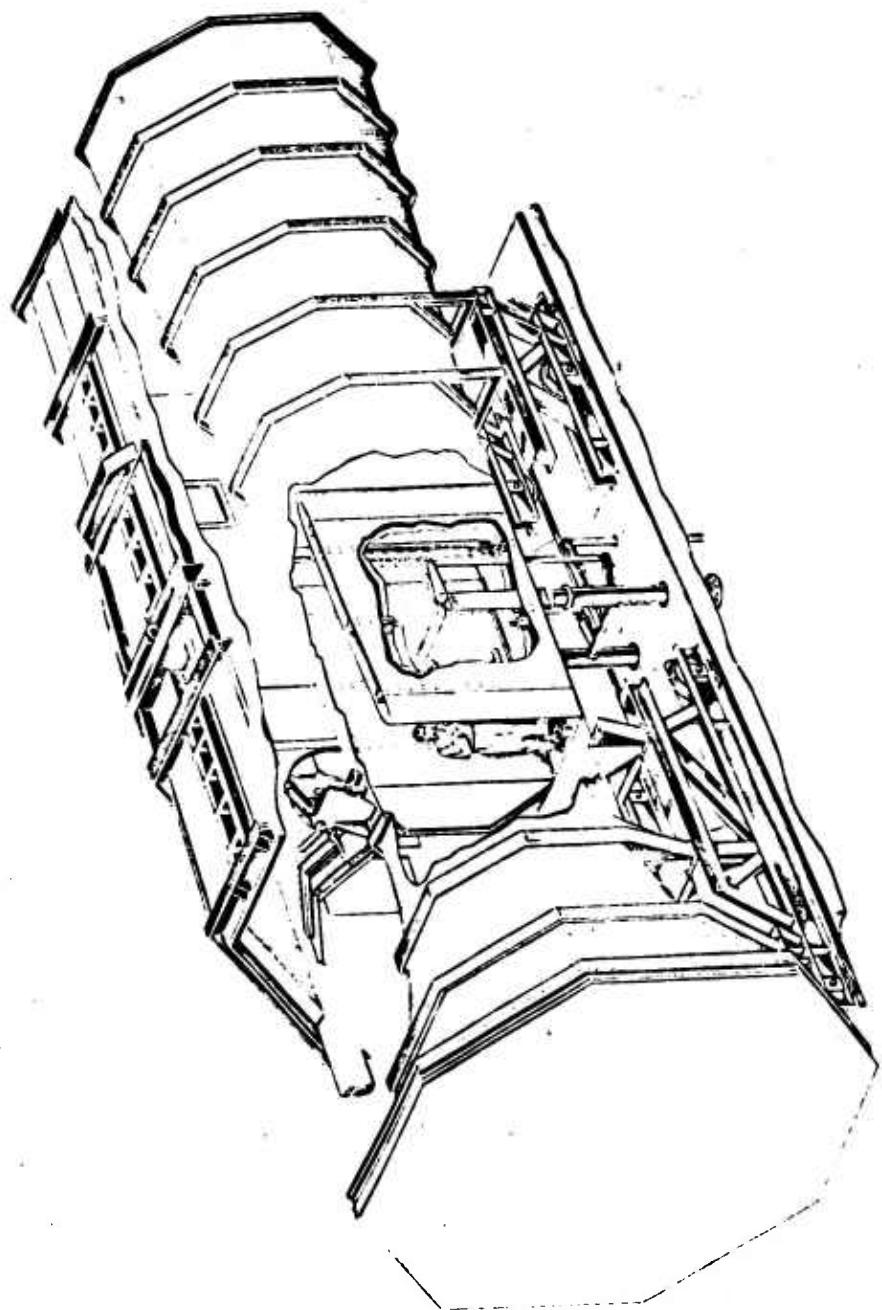



H - 34 MAIN ROTOR SECTION

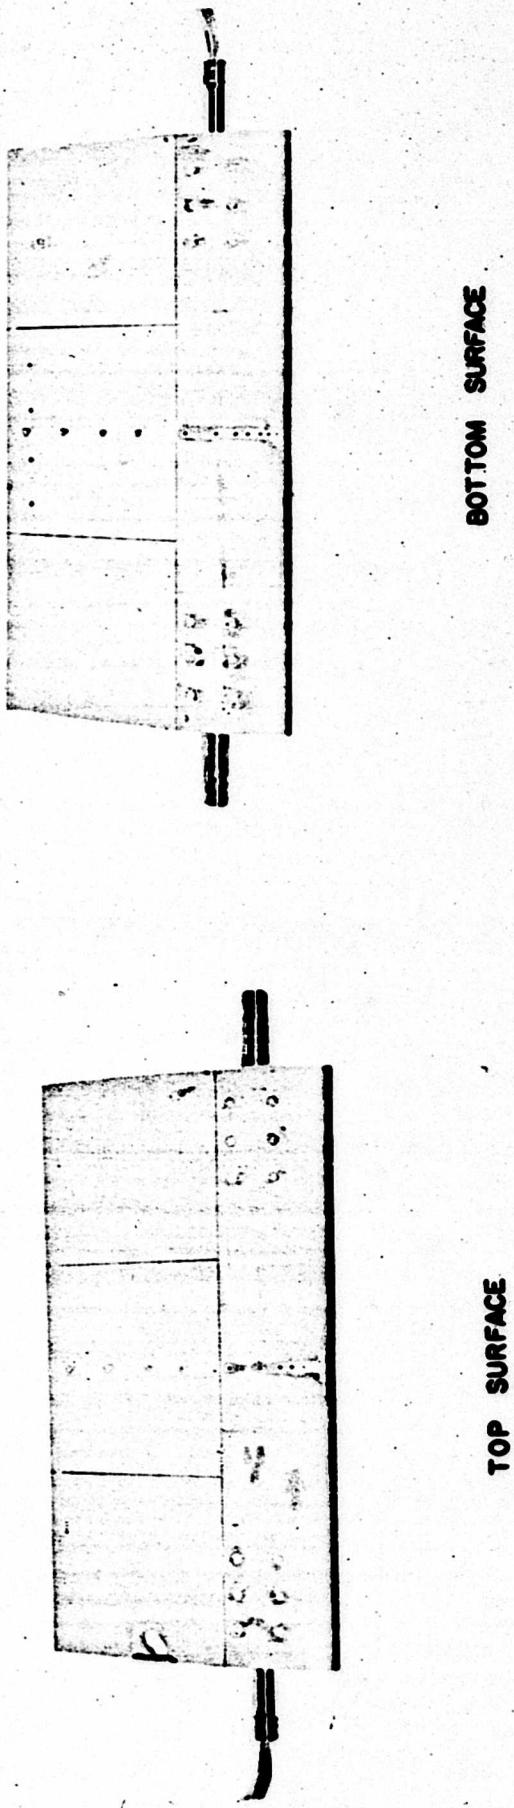

BOTTOM SURFACE

TOP SURFACE

FIGURE 2. H - 34 WIND TUNNEL MODEL

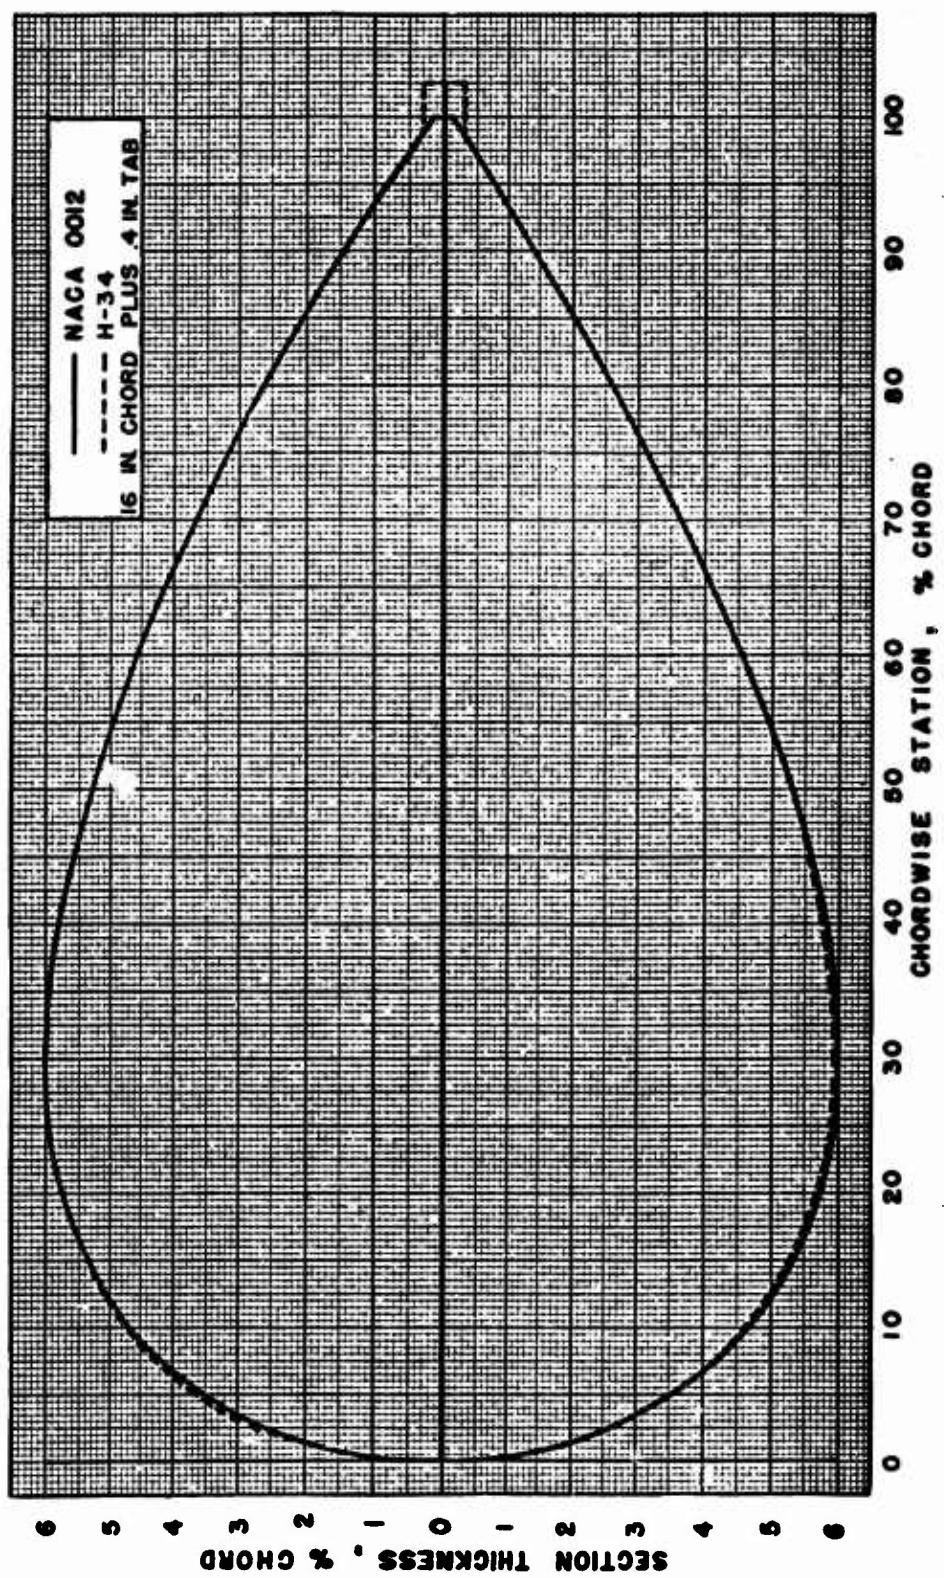


FIGURE 3. AIRFOIL CONTOUR IN COMPARISON TO NACA 0012 SECTION

H-34 AIRFOIL AT 1/2 SPAN

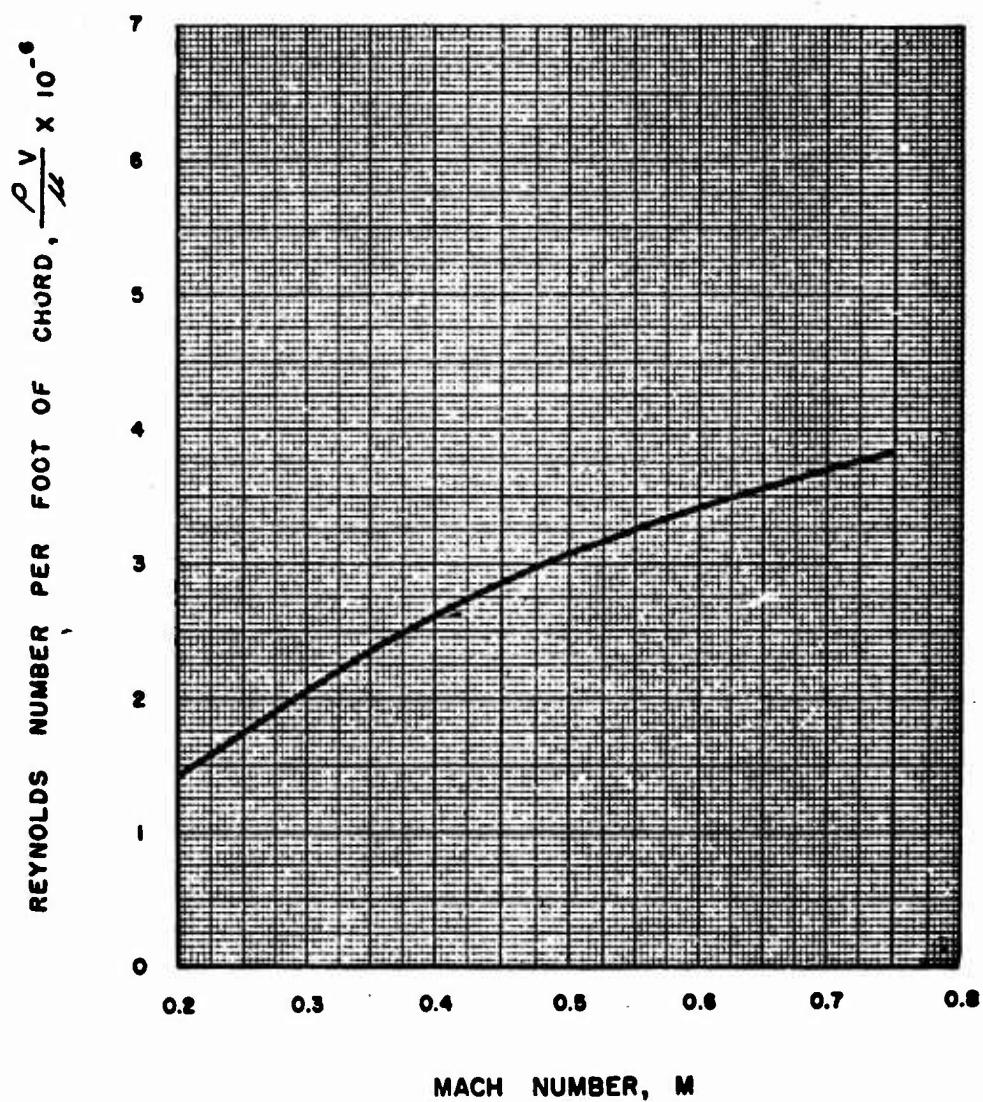


FIGURE 4. VARIATION OF REYNOLDS NUMBER WITH MACH NUMBER


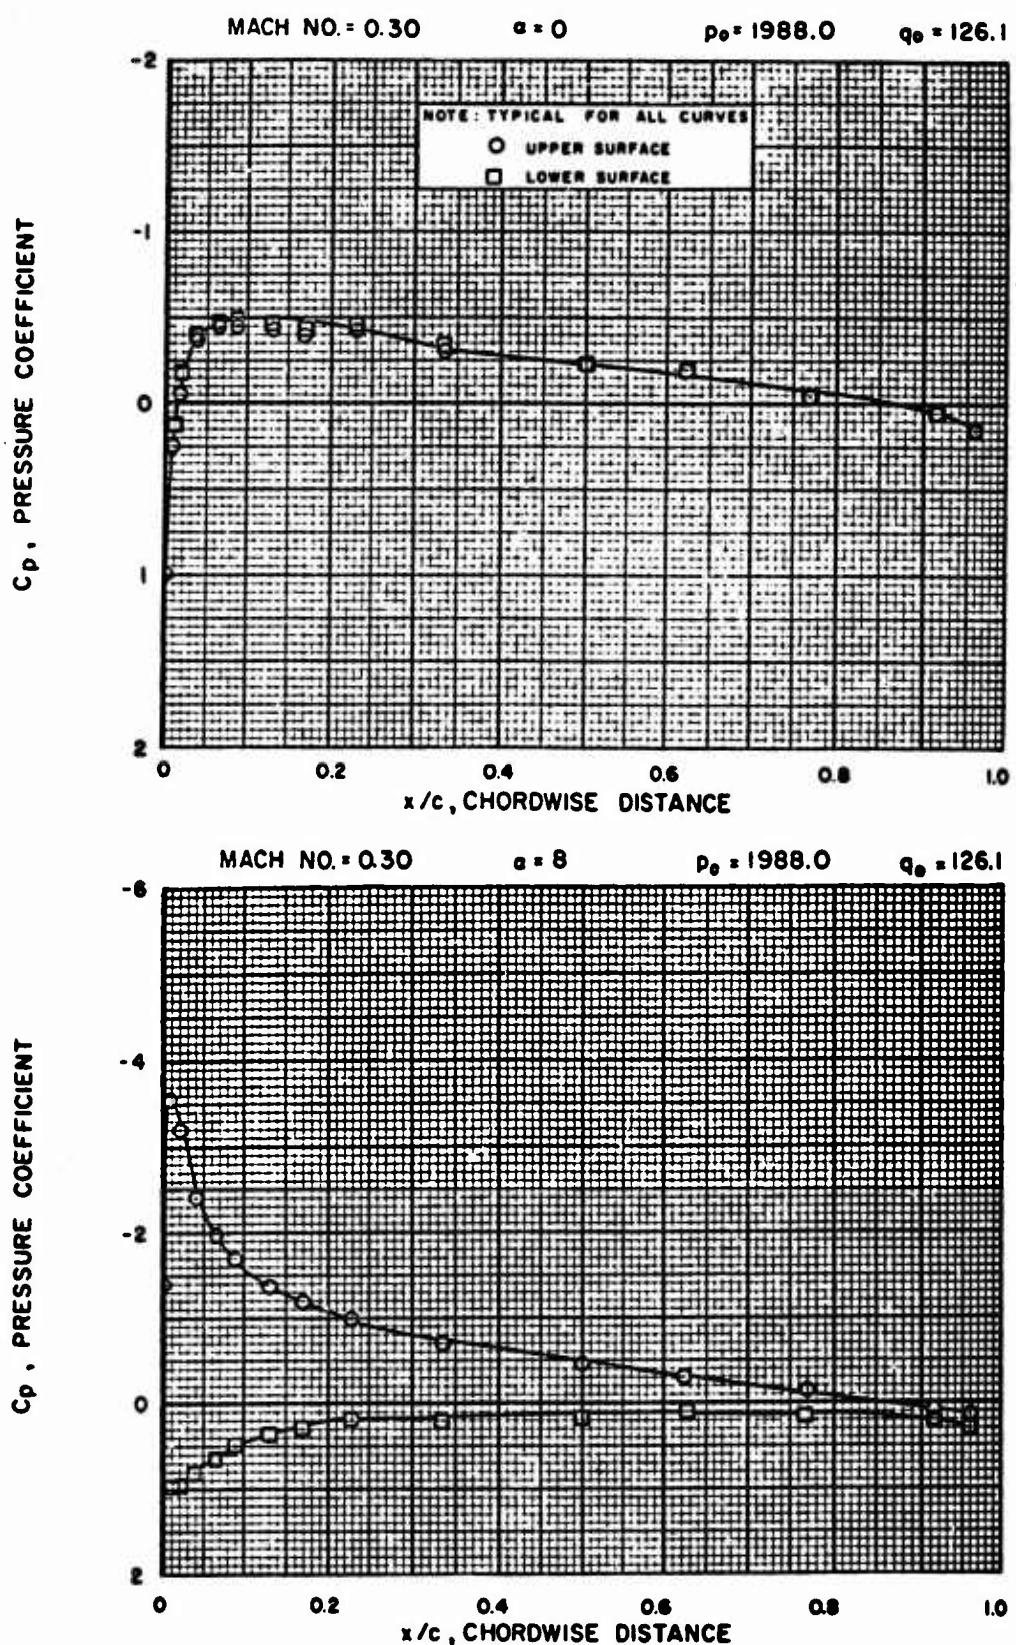


FIGURE 5 CHORDWISE PRESSURE COEFFICIENTS

MACH NO. = 0.30 $\alpha = 14$ $p_0 = 1987.2$ $q_0 = 126.9$

C_p, PRESSURE COEFFICIENT

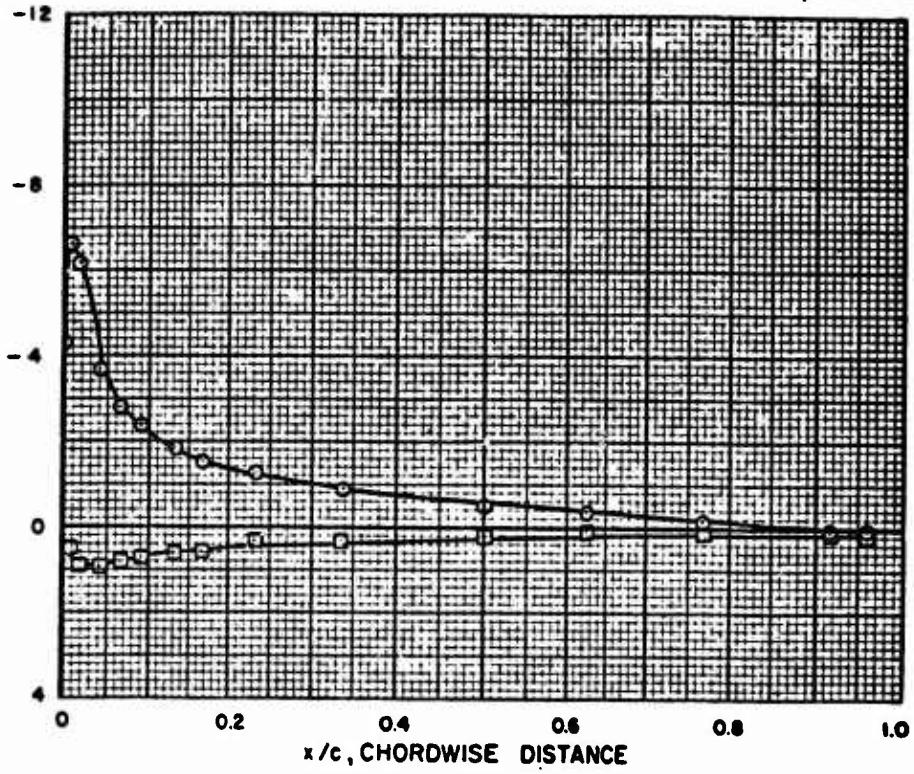

MACH NO. = 0.30 $\alpha = 16$ $p_0 = 1985.6$ $q_0 = 128.4$

C_p, PRESSURE COEFFICIENT

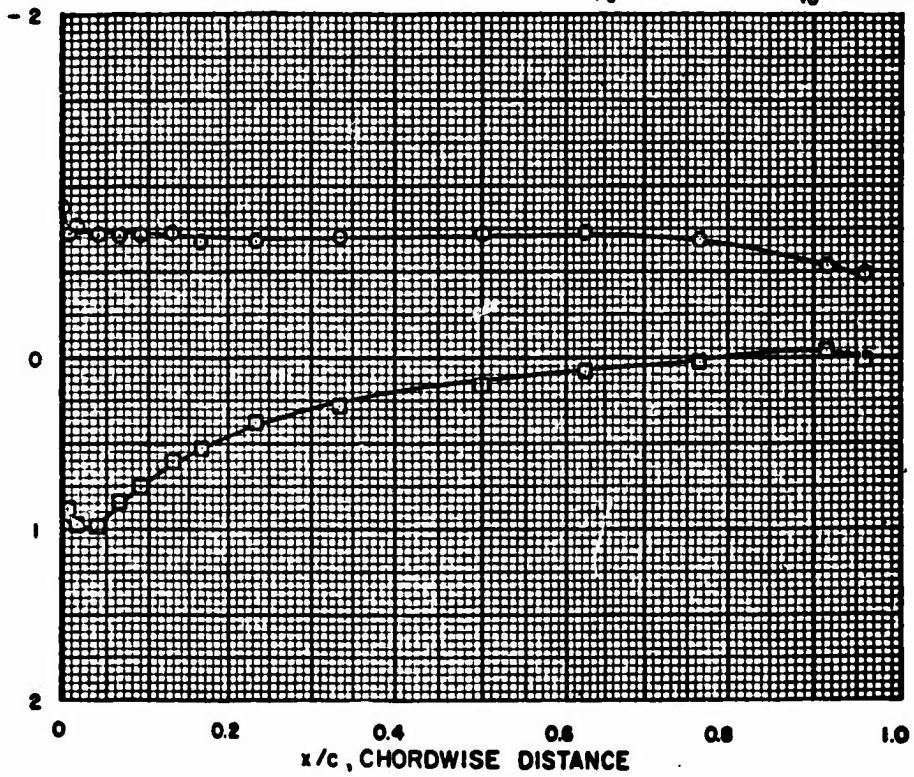


FIGURE 6 CHORDWISE PRESSURE COEFFICIENTS

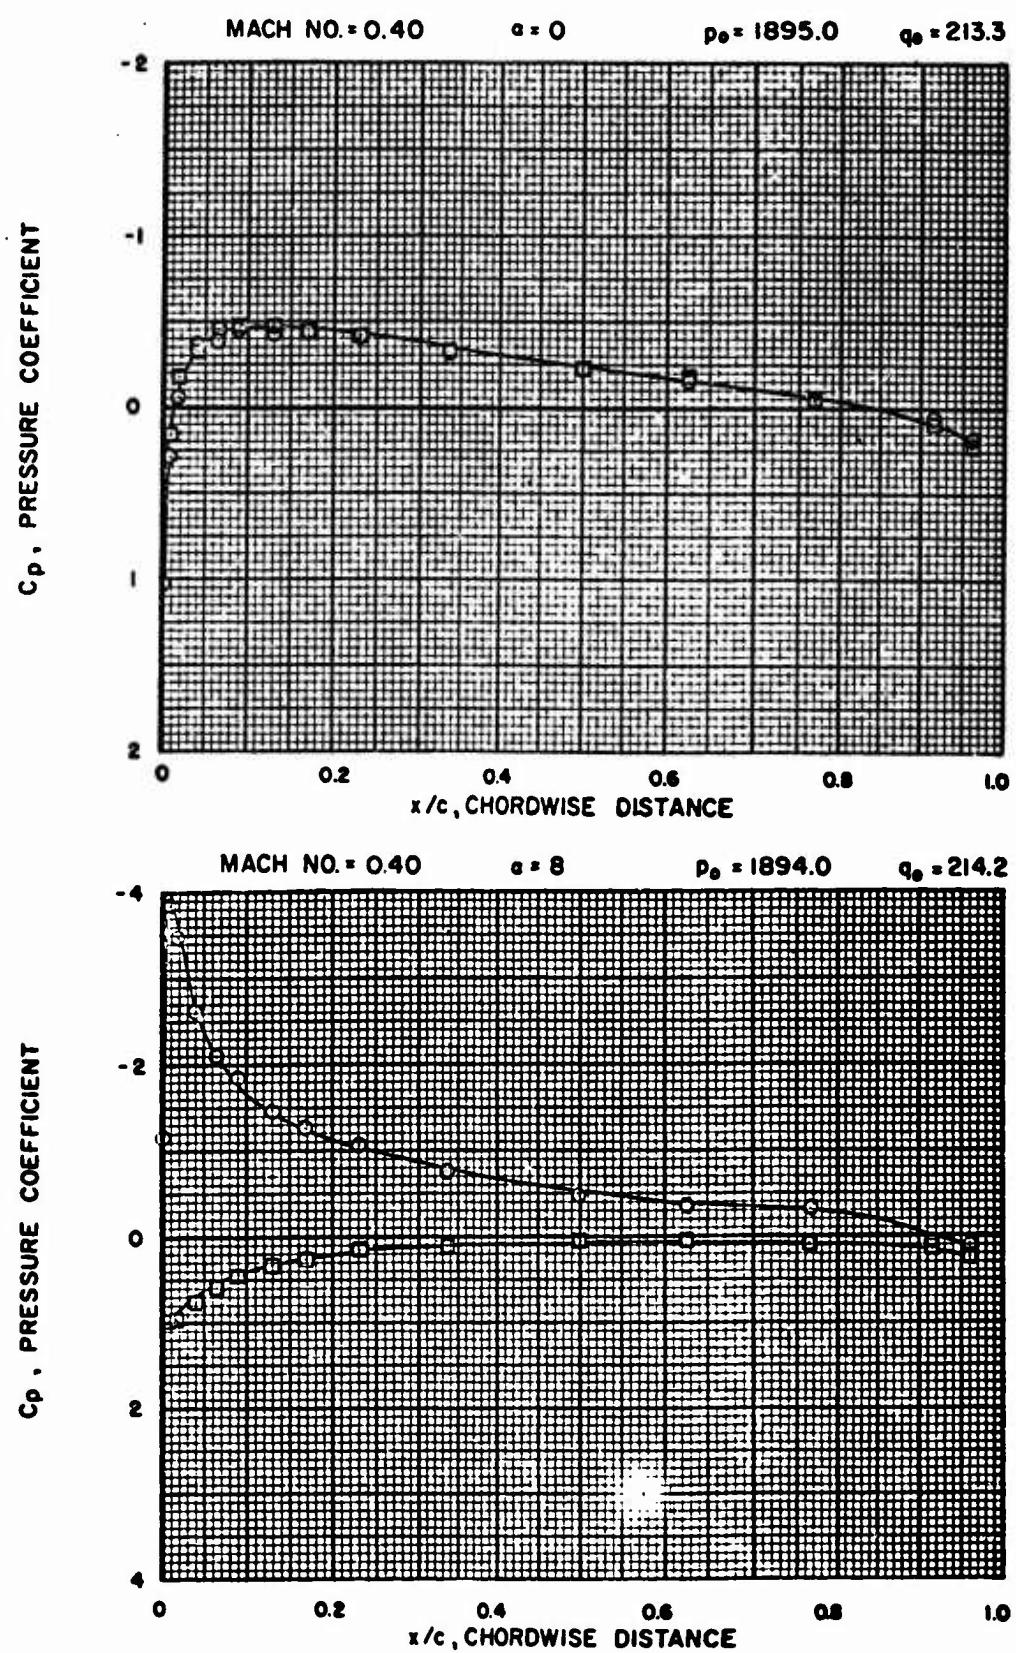


FIGURE 7 CHORDWISE PRESSURE COEFFICIENTS

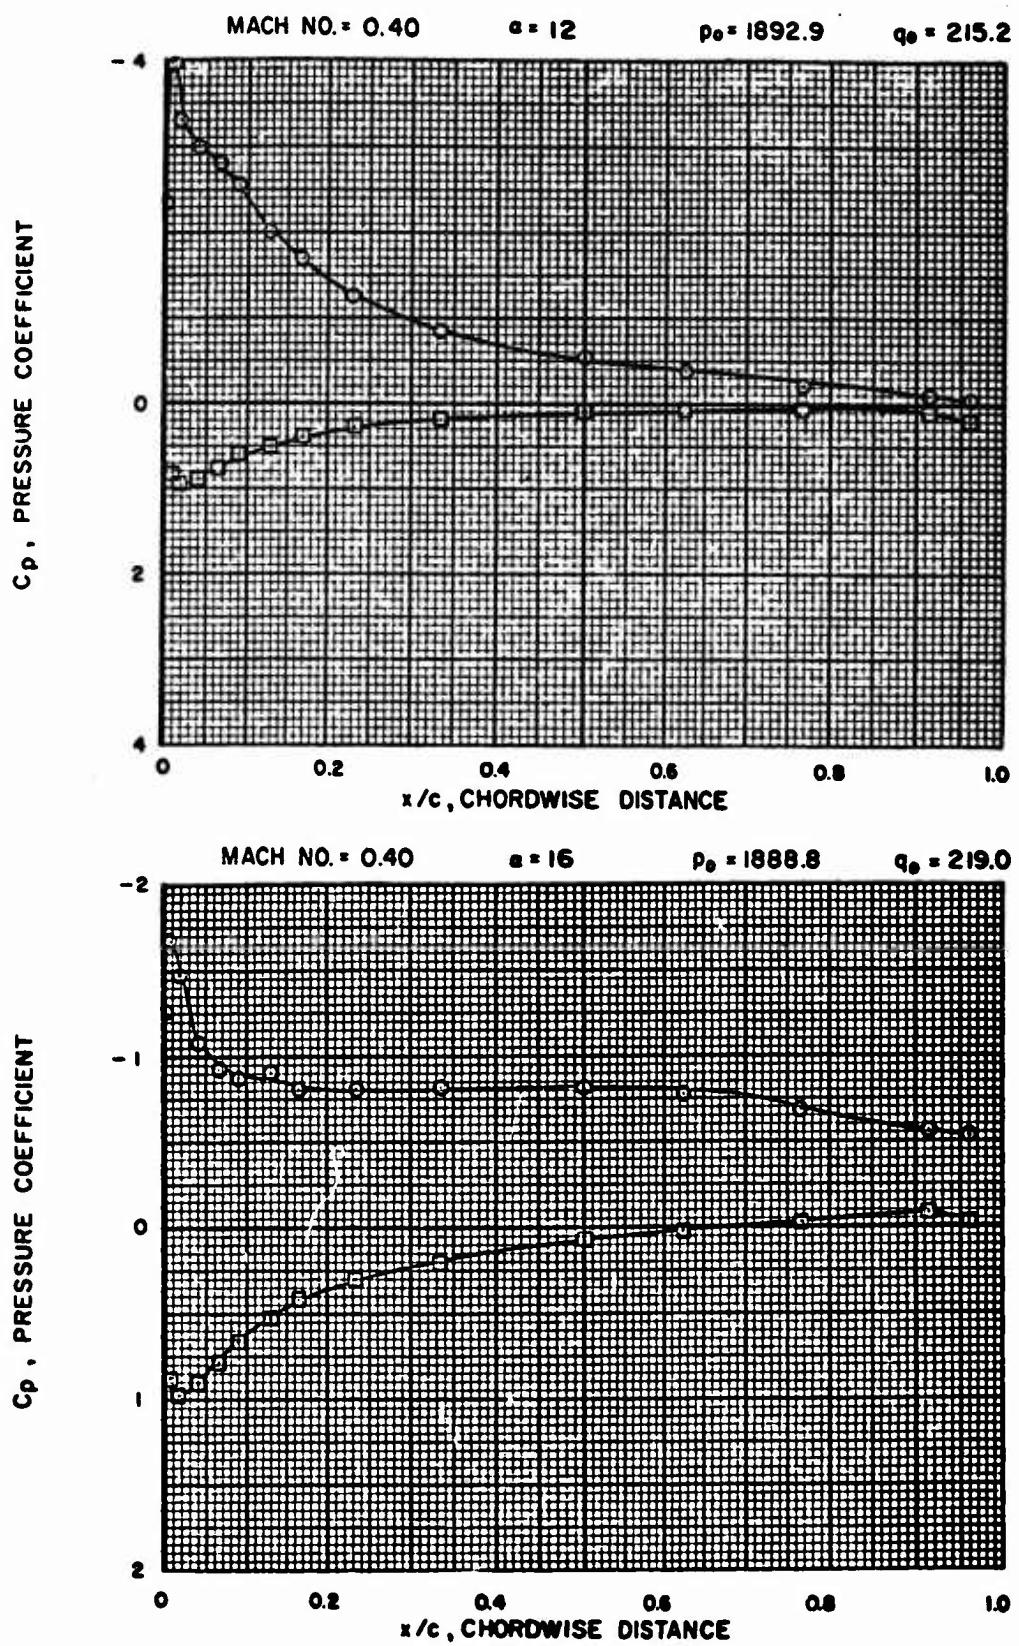


FIGURE 8 CHORDWISE PRESSURE COEFFICIENTS

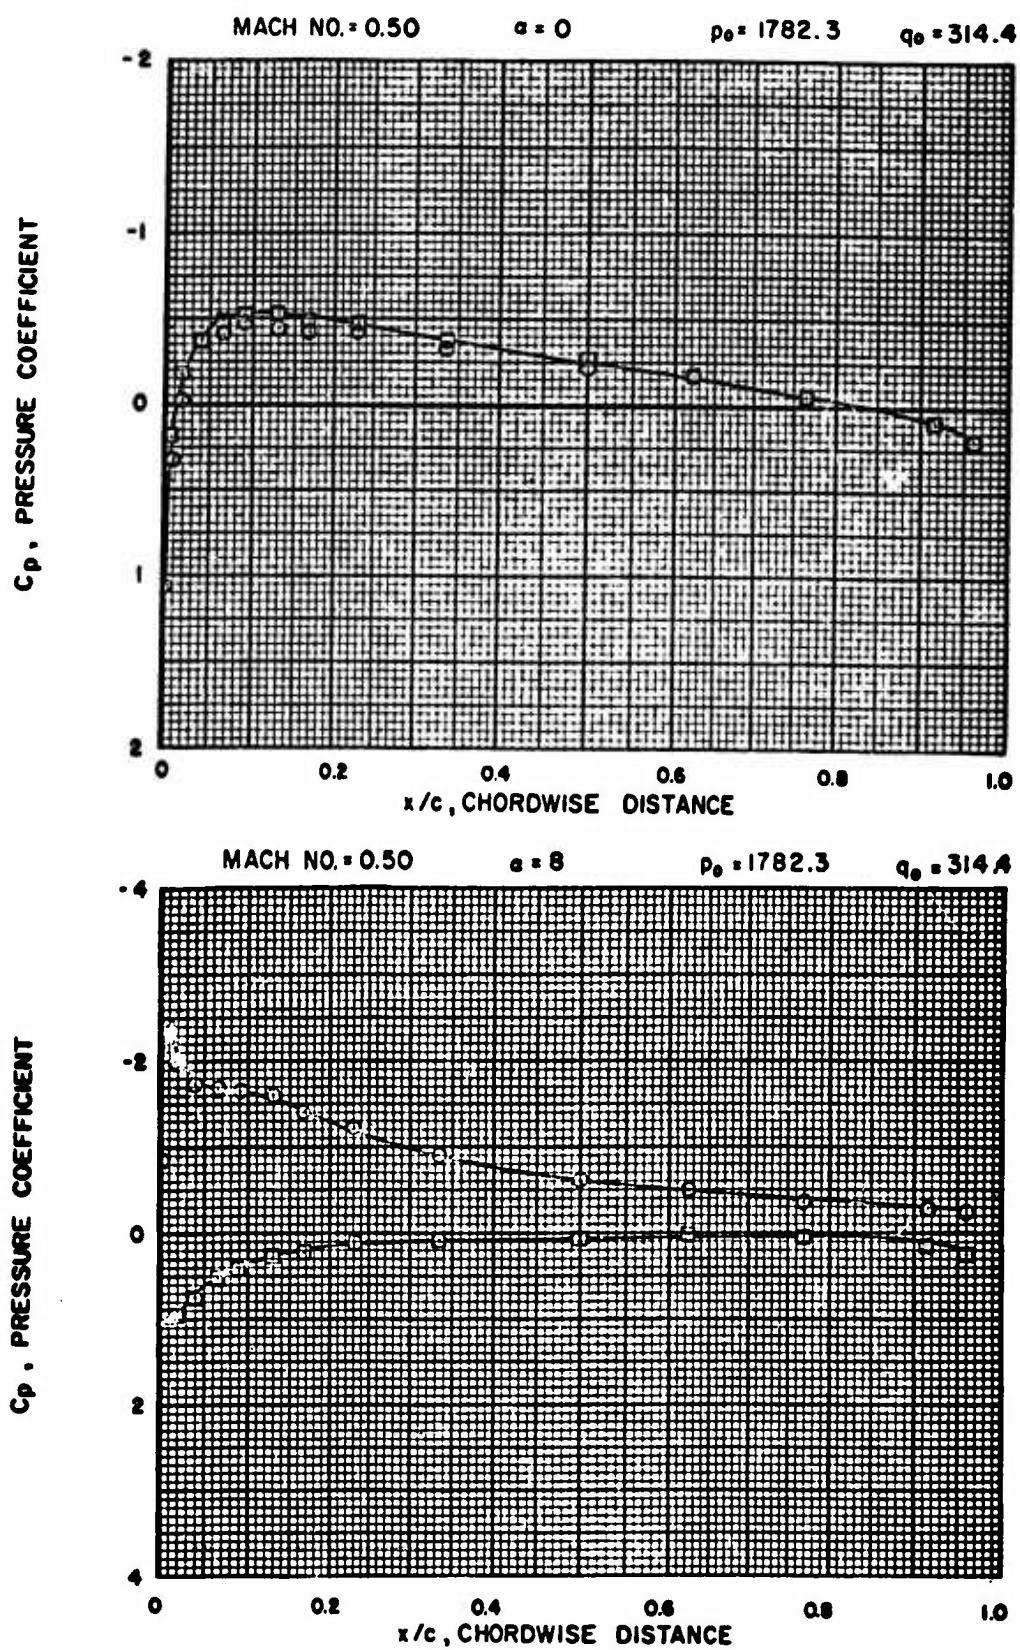


FIGURE 9 CHORDWISE PRESSURE COEFFICIENTS

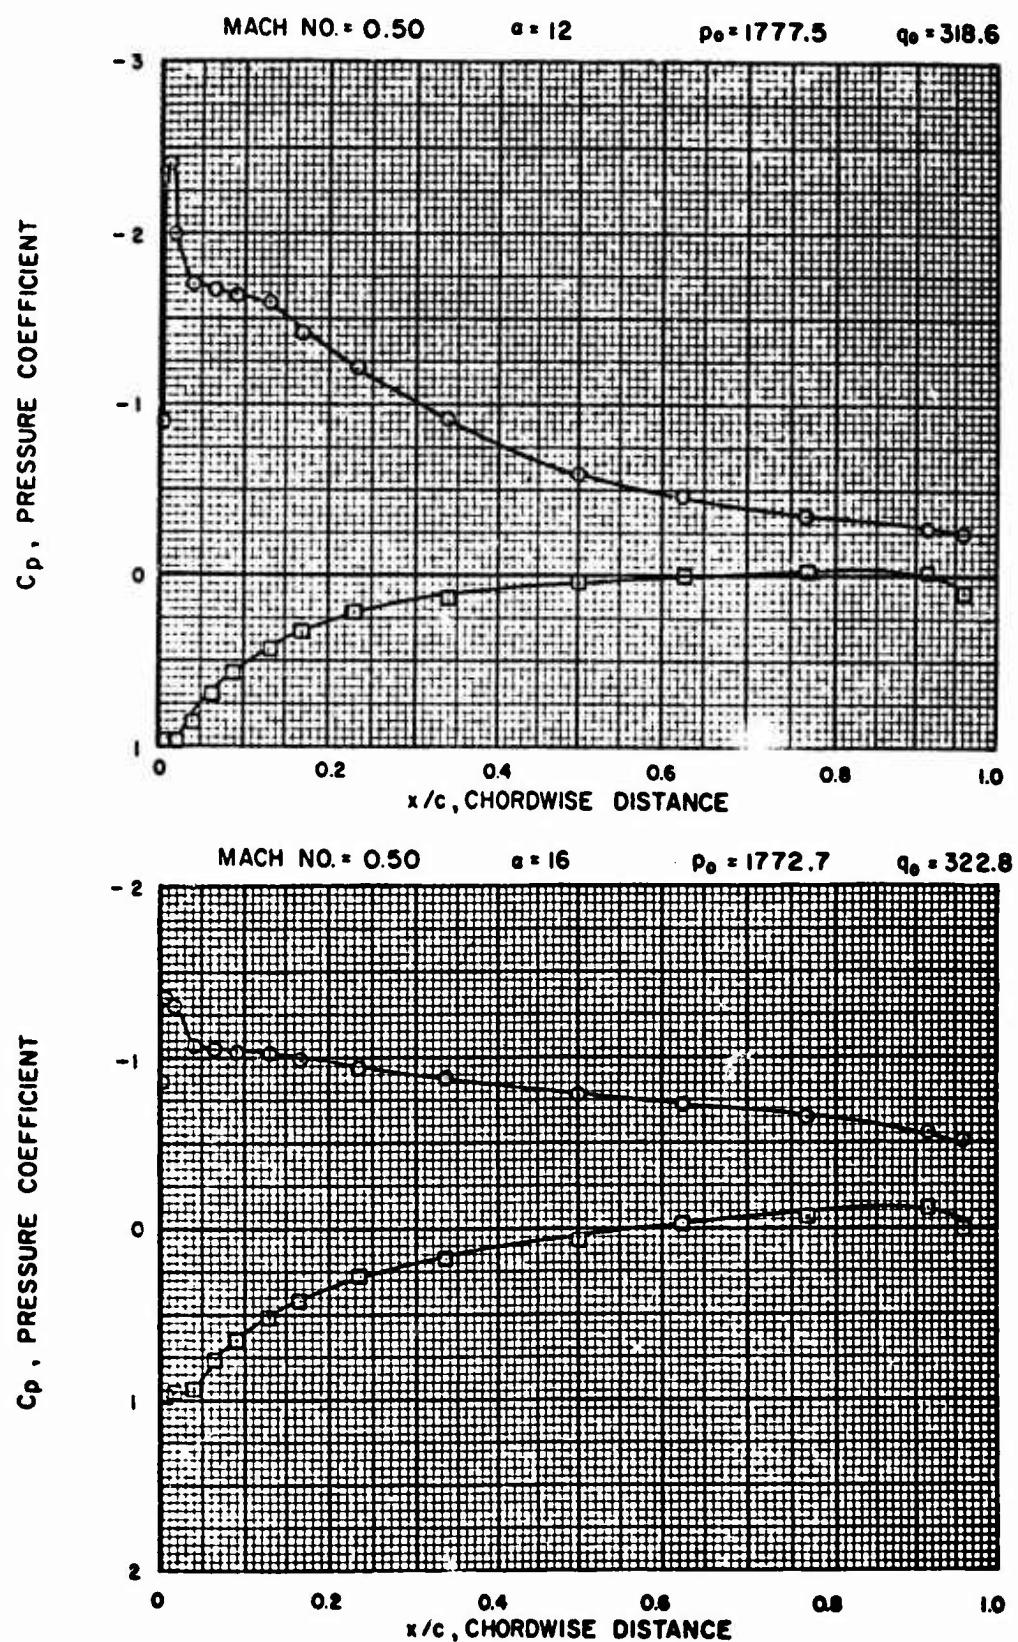


FIGURE 10 CHORDWISE PRESSURE COEFFICIENTS

10

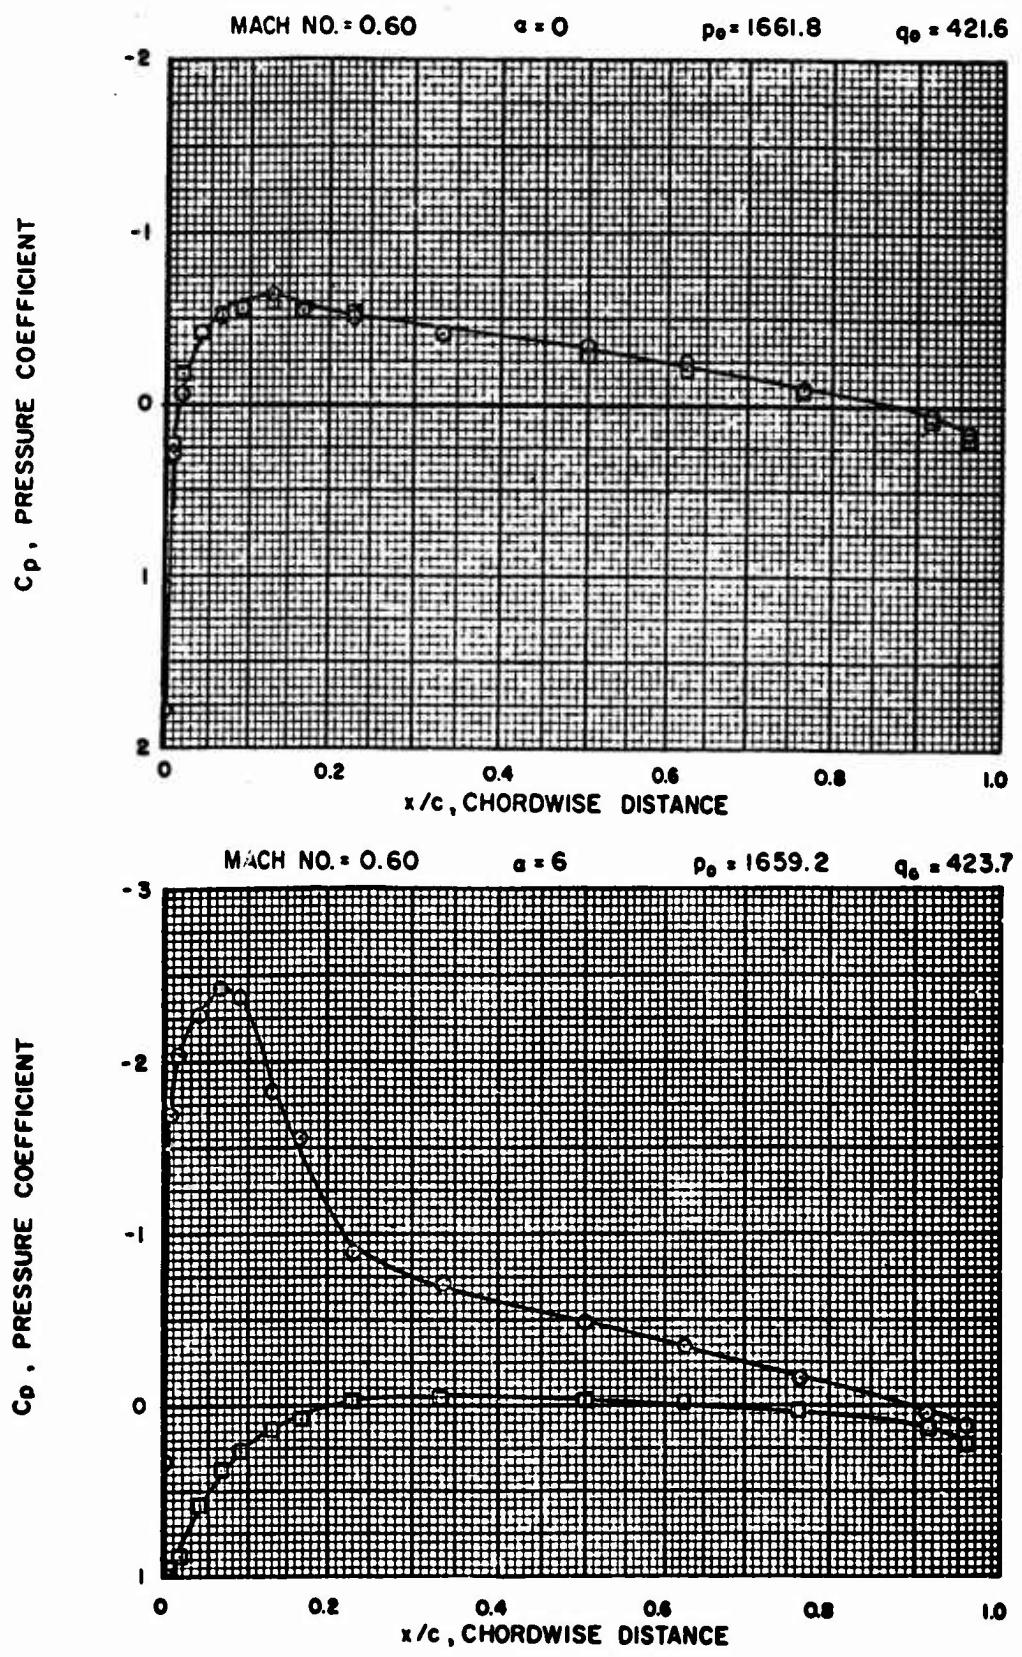


FIGURE II CHORDWISE PRESSURE COEFFICIENTS

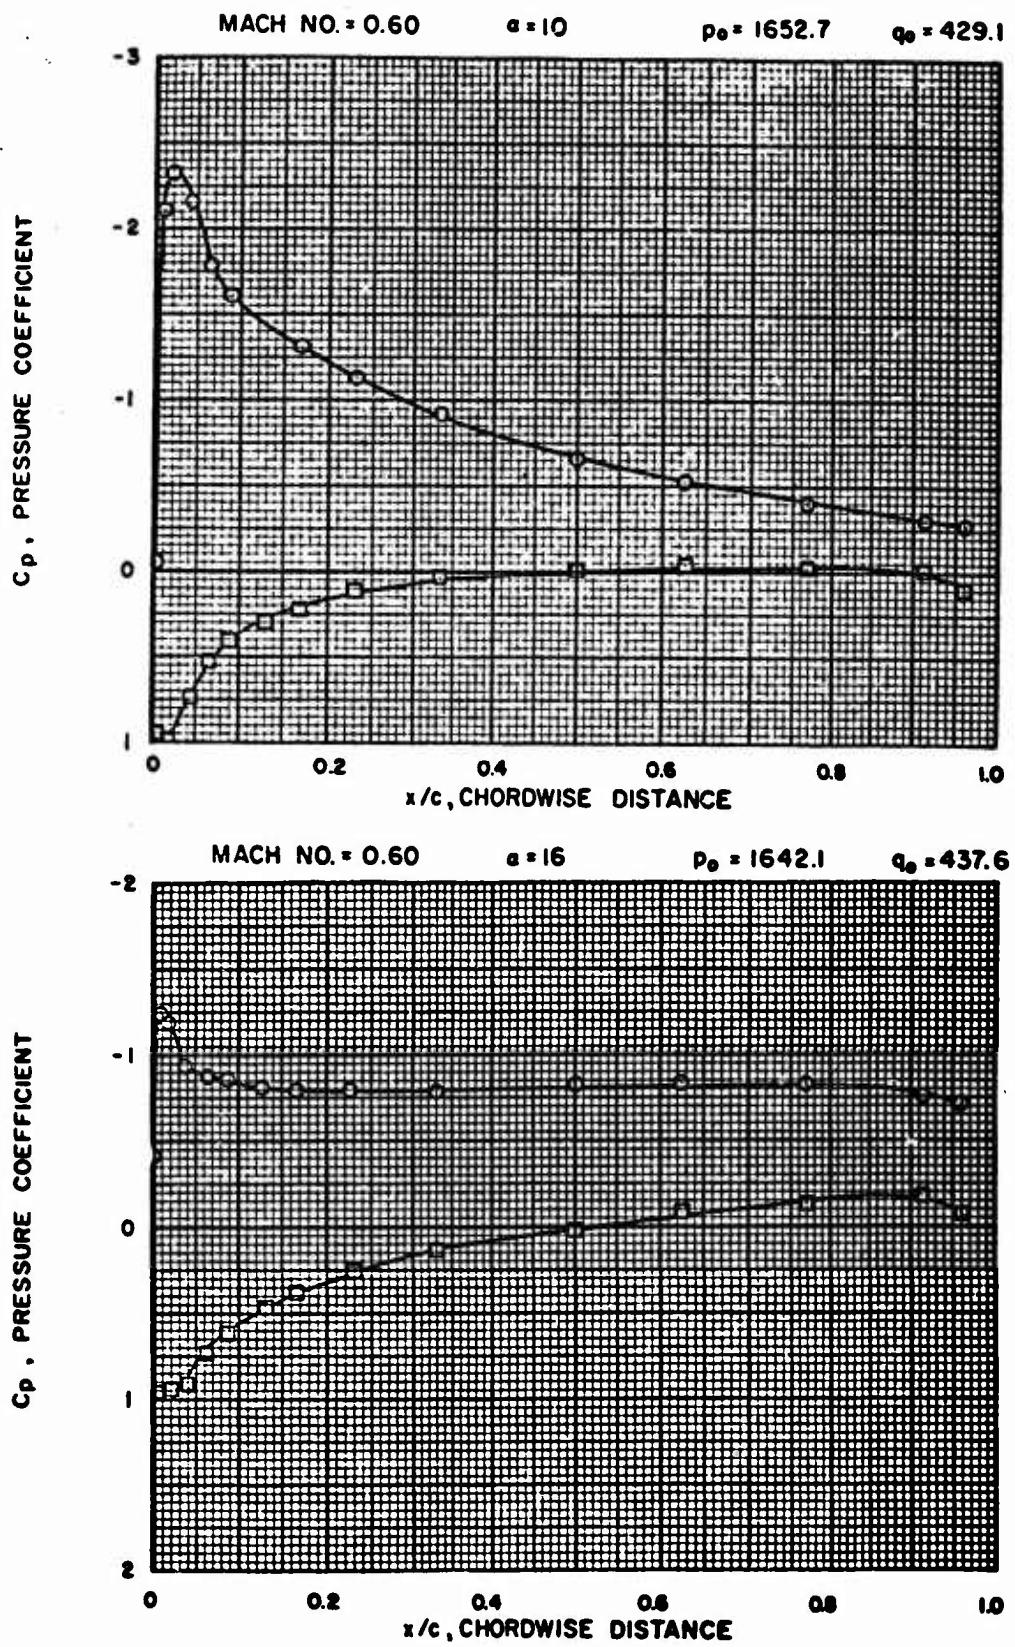


FIGURE 12 CHORDWISE PRESSURE COEFFICIENTS

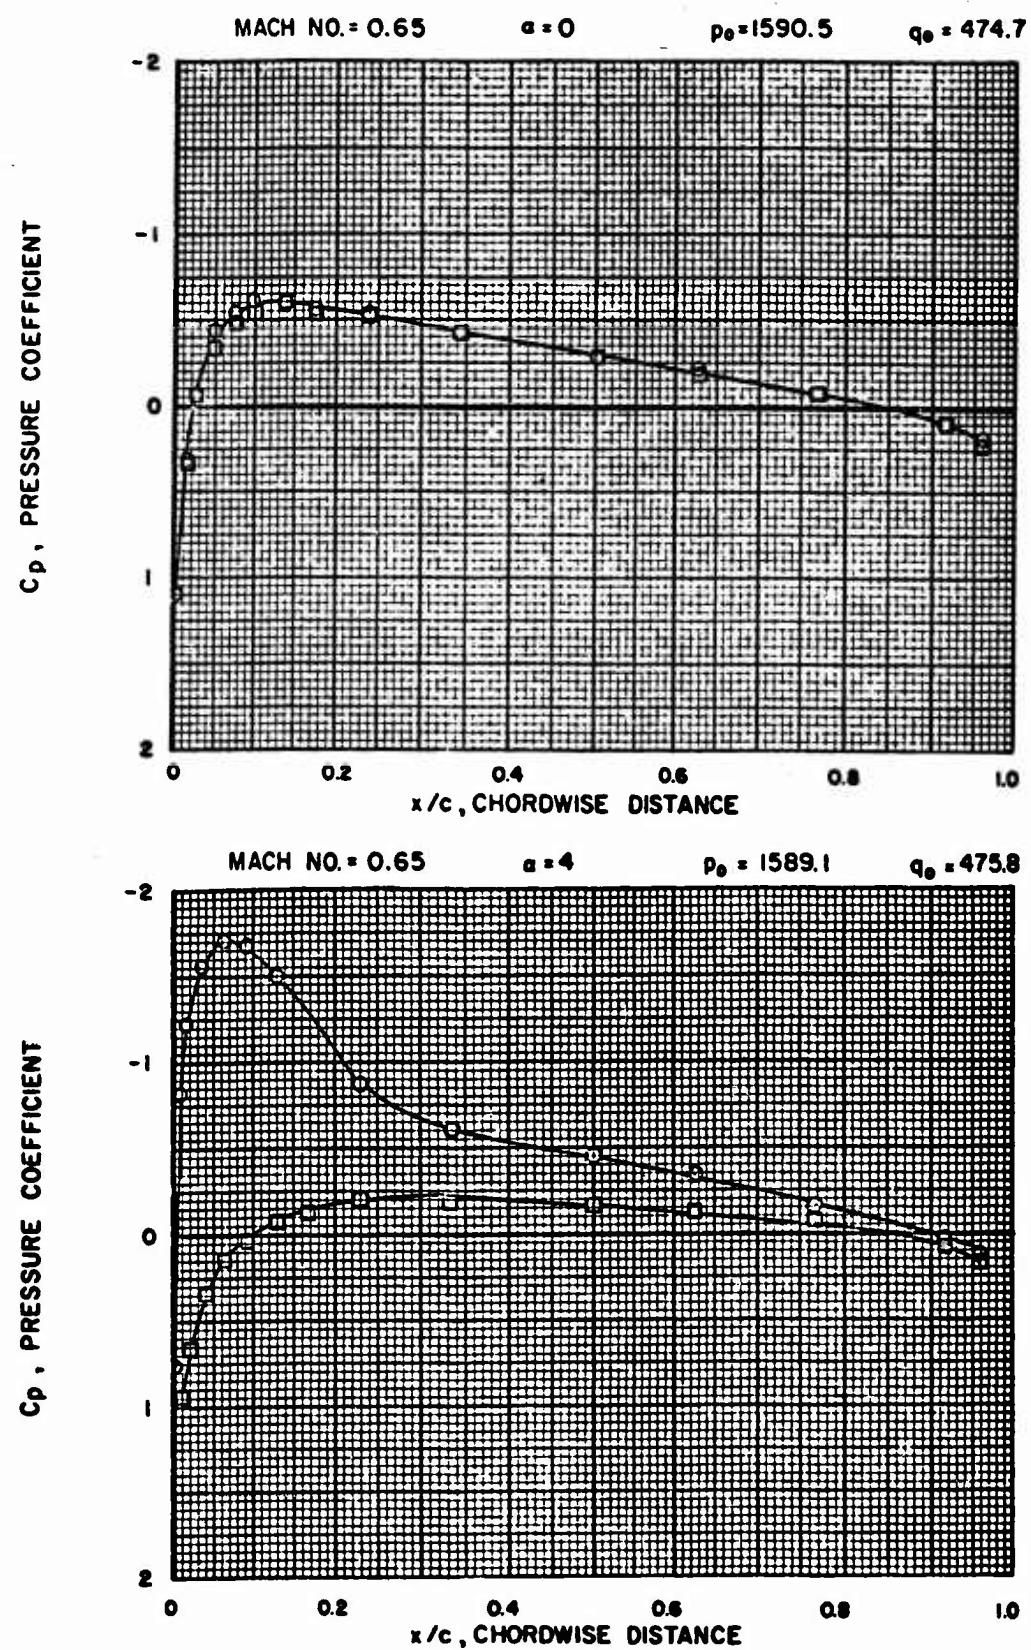


FIGURE 13 CHORDWISE PRESSURE COEFFICIENTS
21

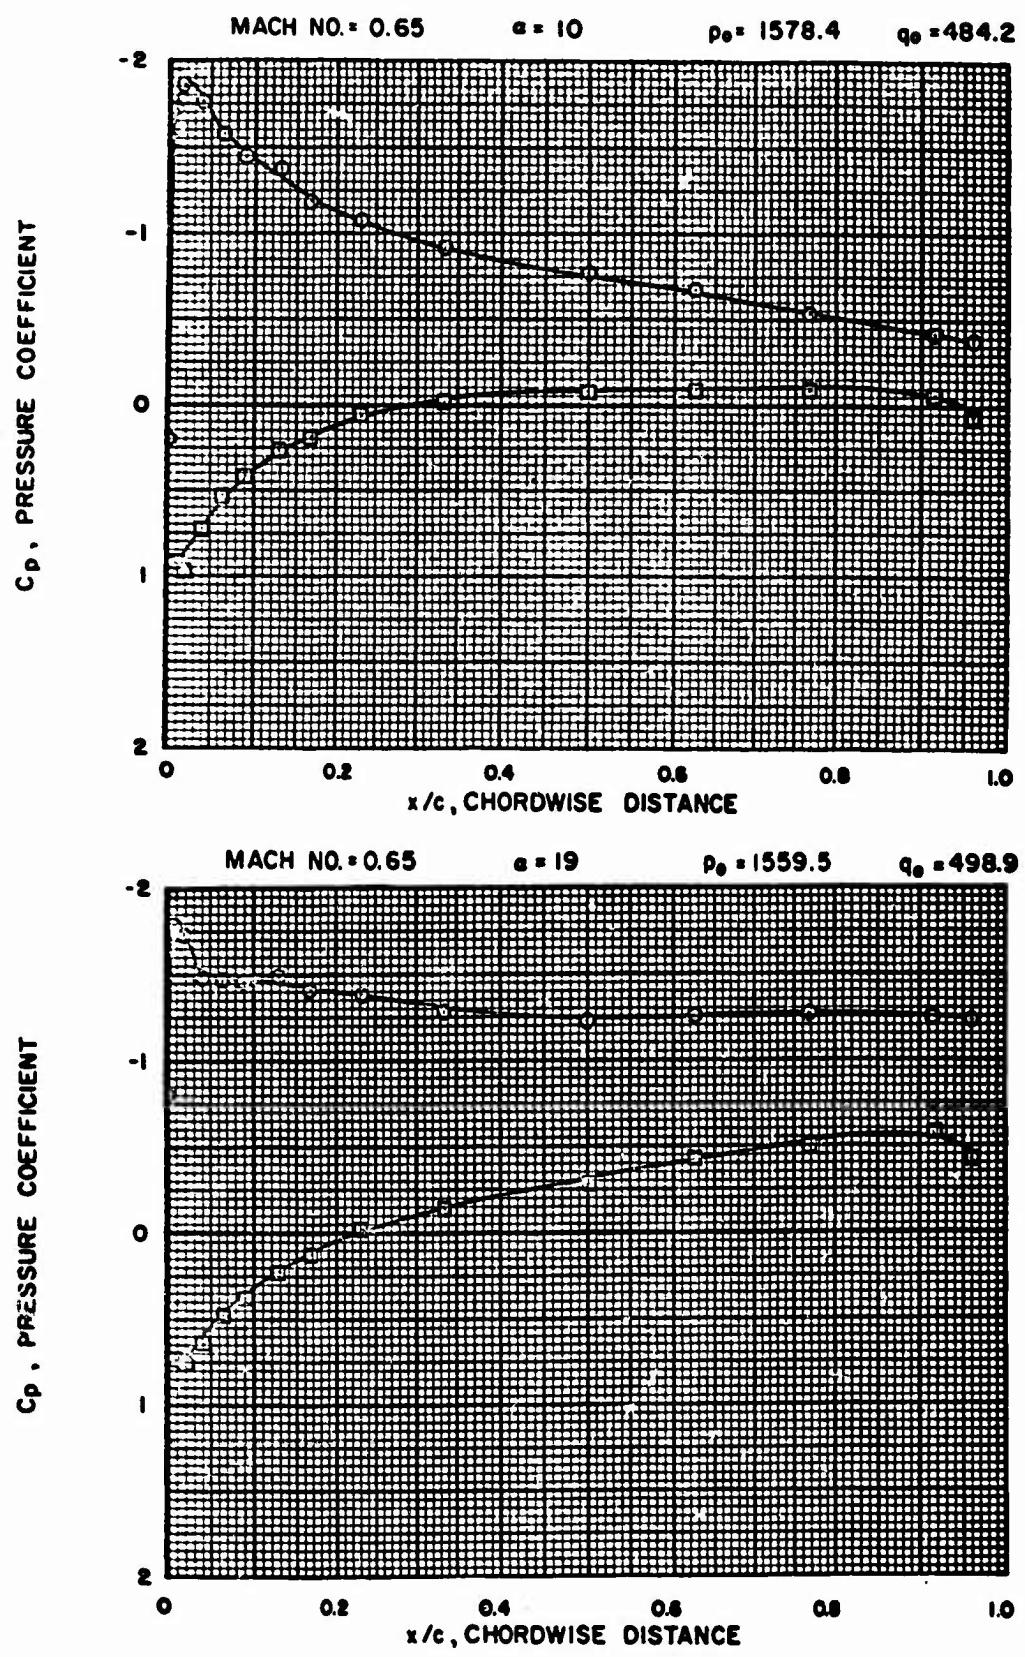


FIGURE 14 CHORDWISE PRESSURE COEFFICIENTS

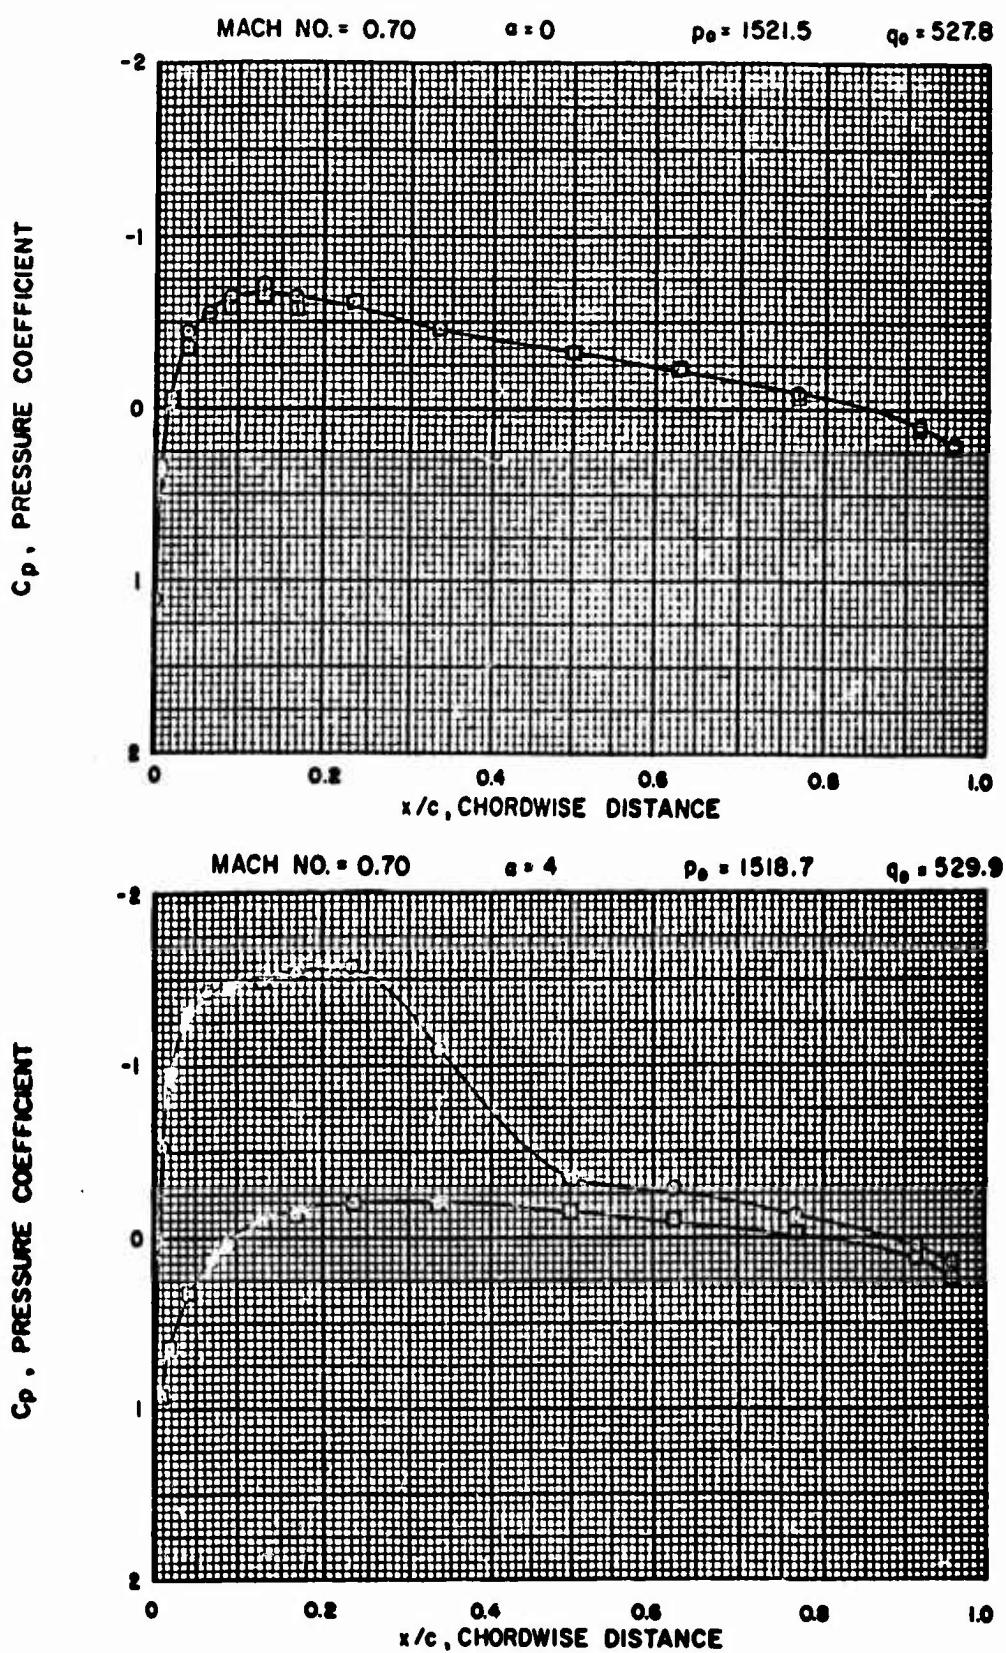


FIGURE 15 CHORDWISE PRESSURE COEFFICIENTS

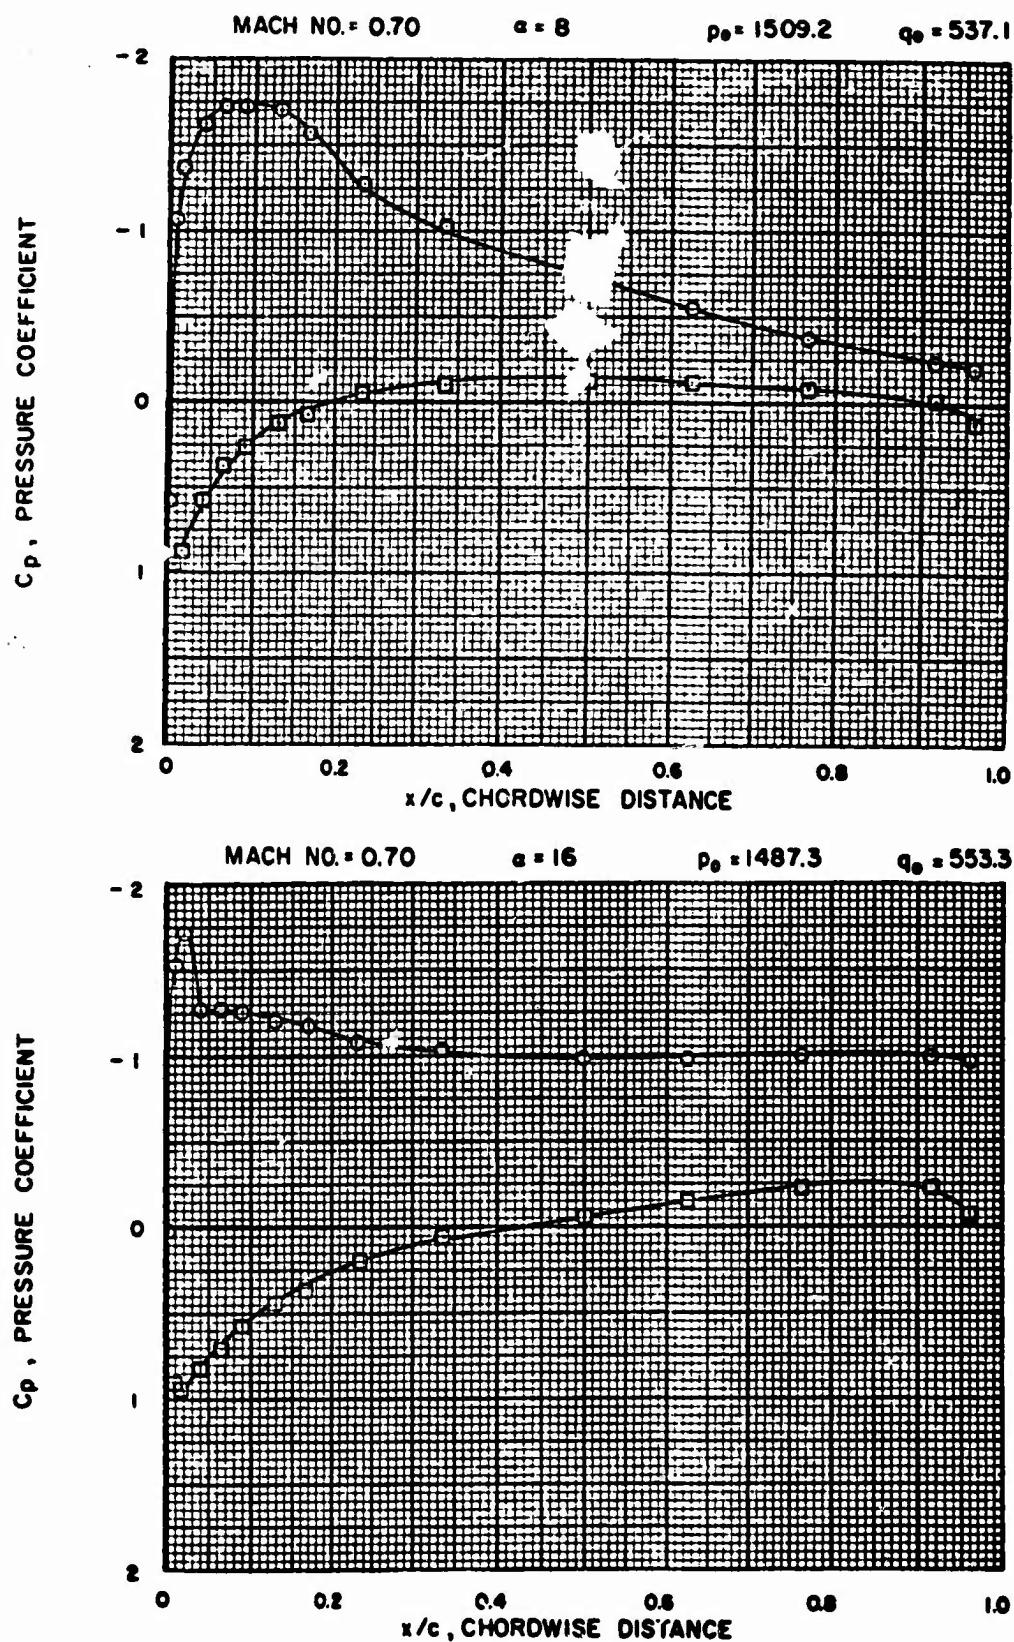


FIGURE 16. CHORDWISE PRESSURE COEFFICIENTS

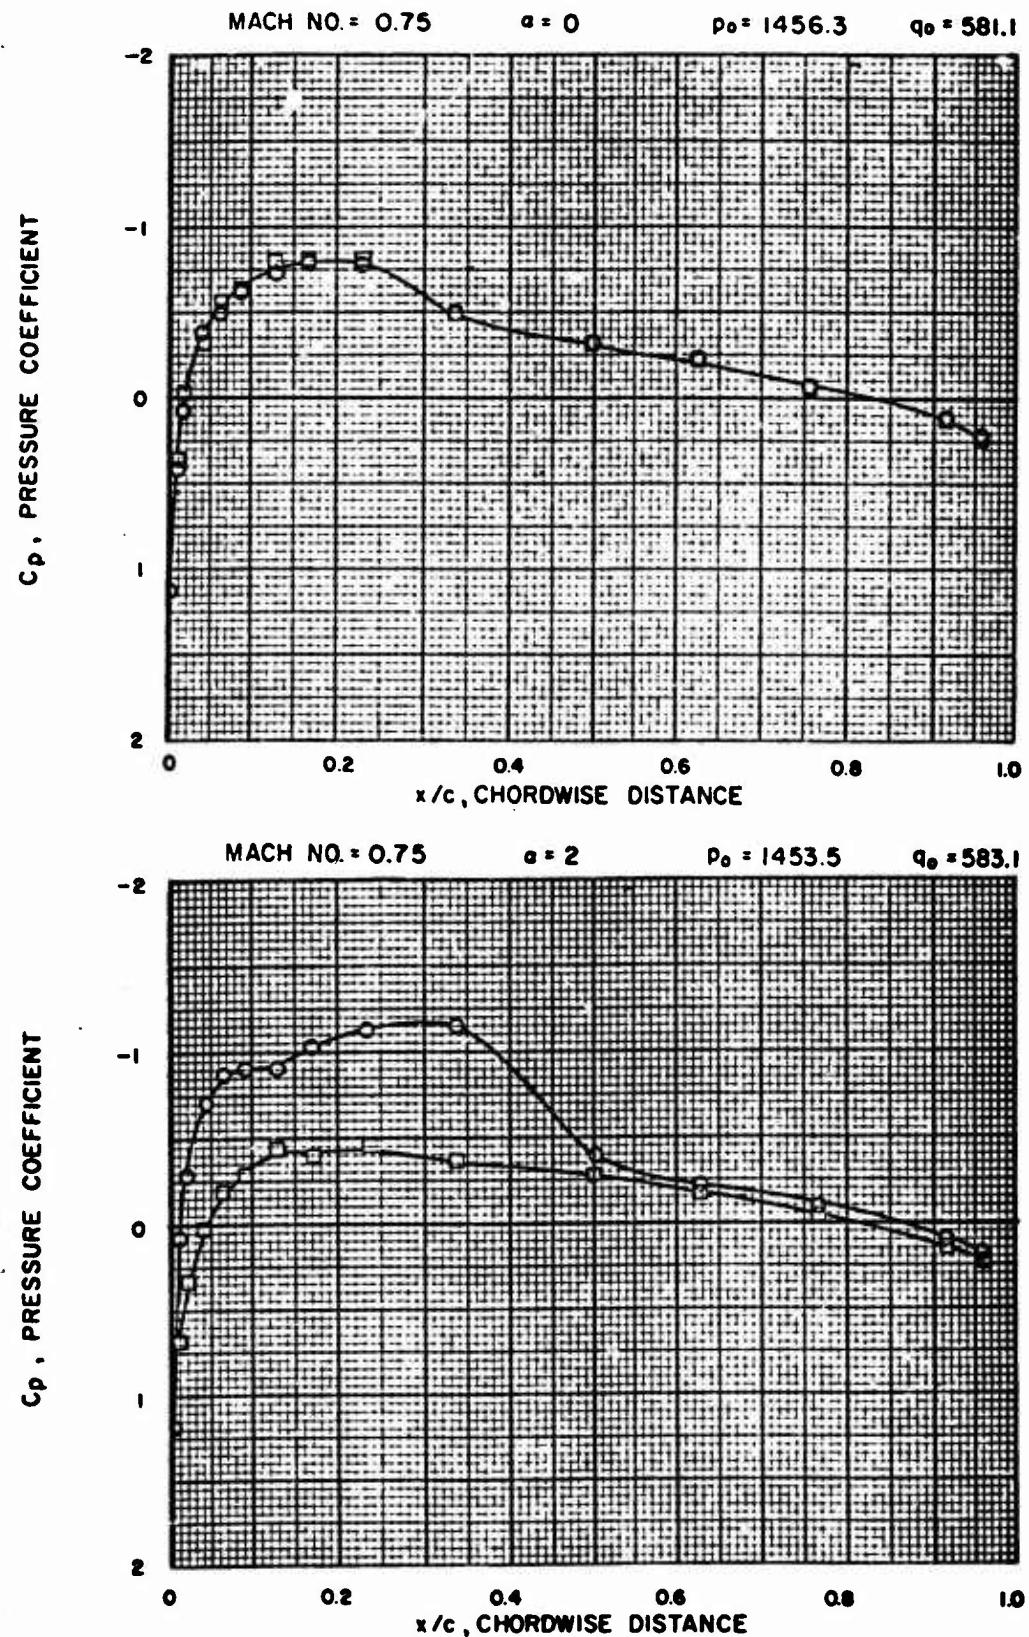


FIGURE 17 CHORDWISE PRESSURE COEFFICIENTS

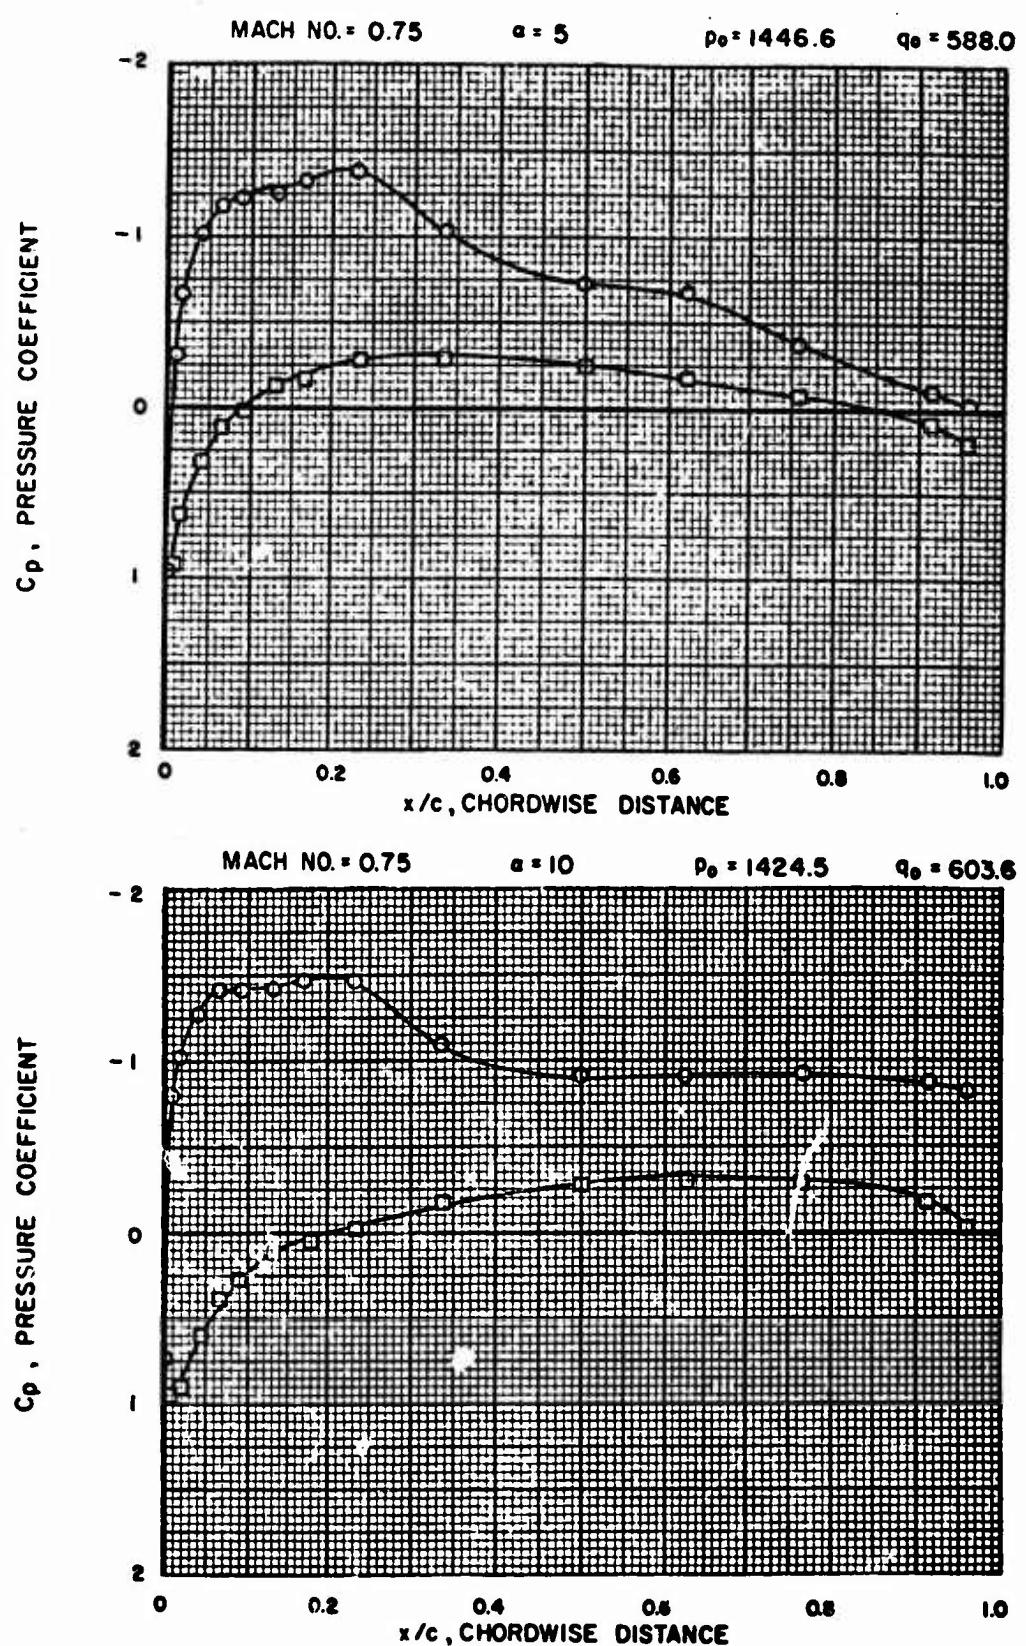


FIGURE 18 CHORDWISE PRESSURE COEFFICIENTS

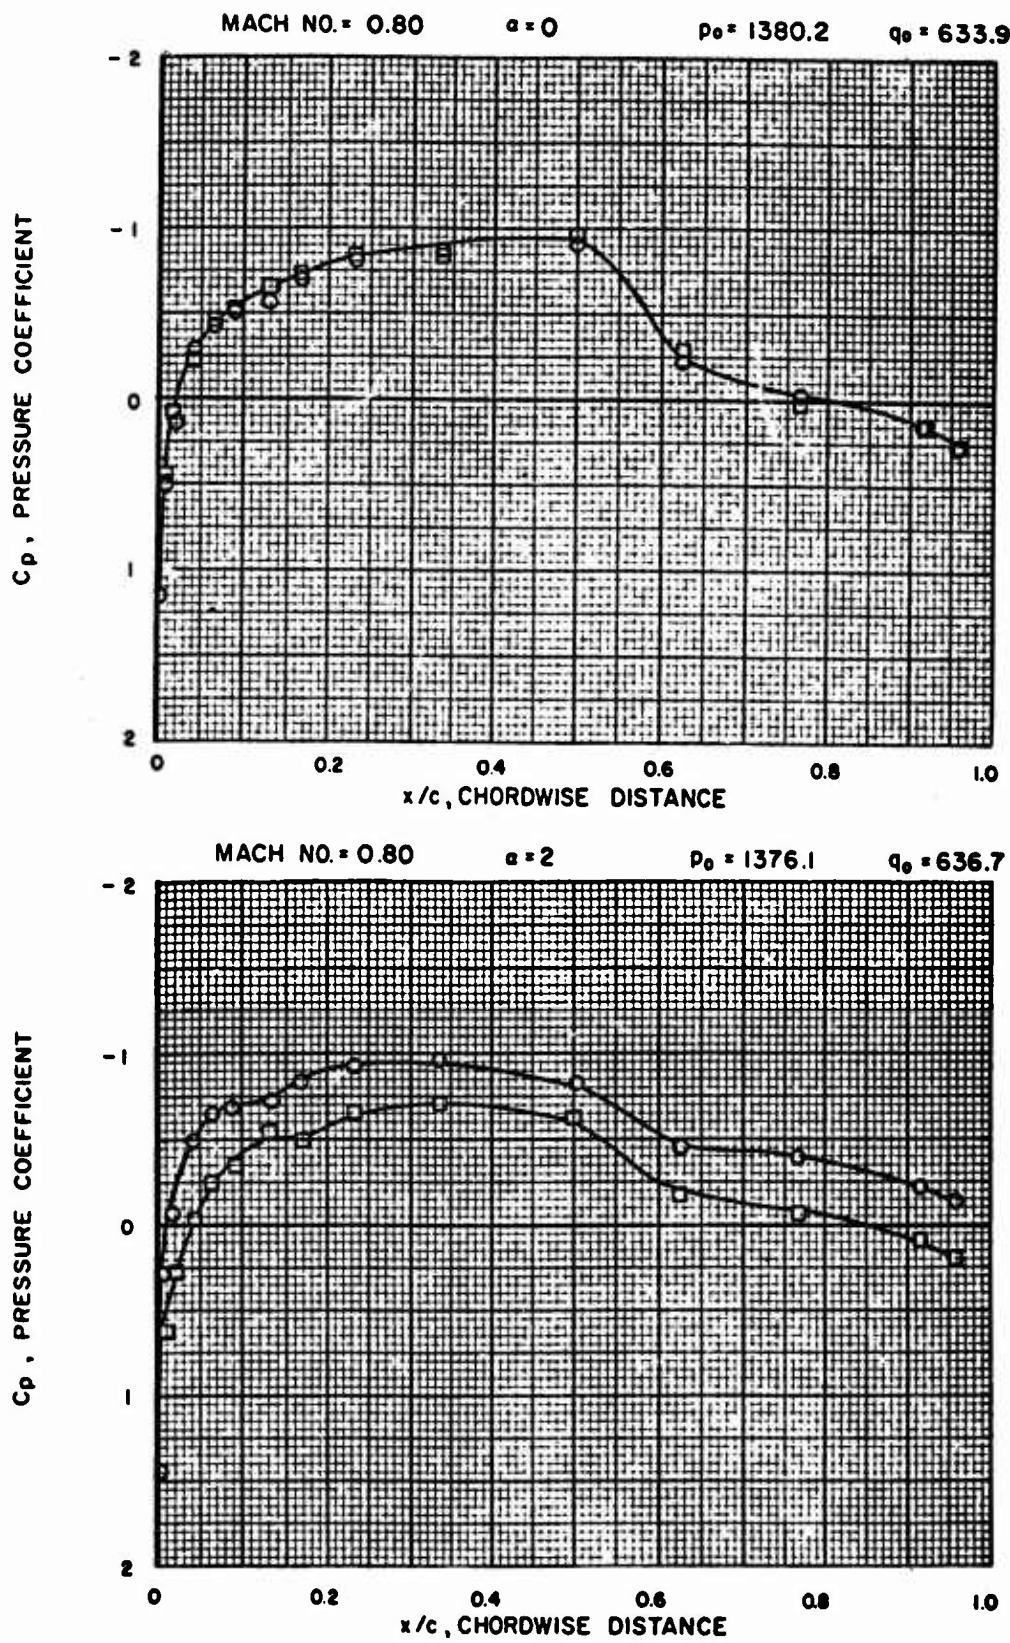


FIGURE 19 CHORDWISE PRESSURE COEFFICIENTS

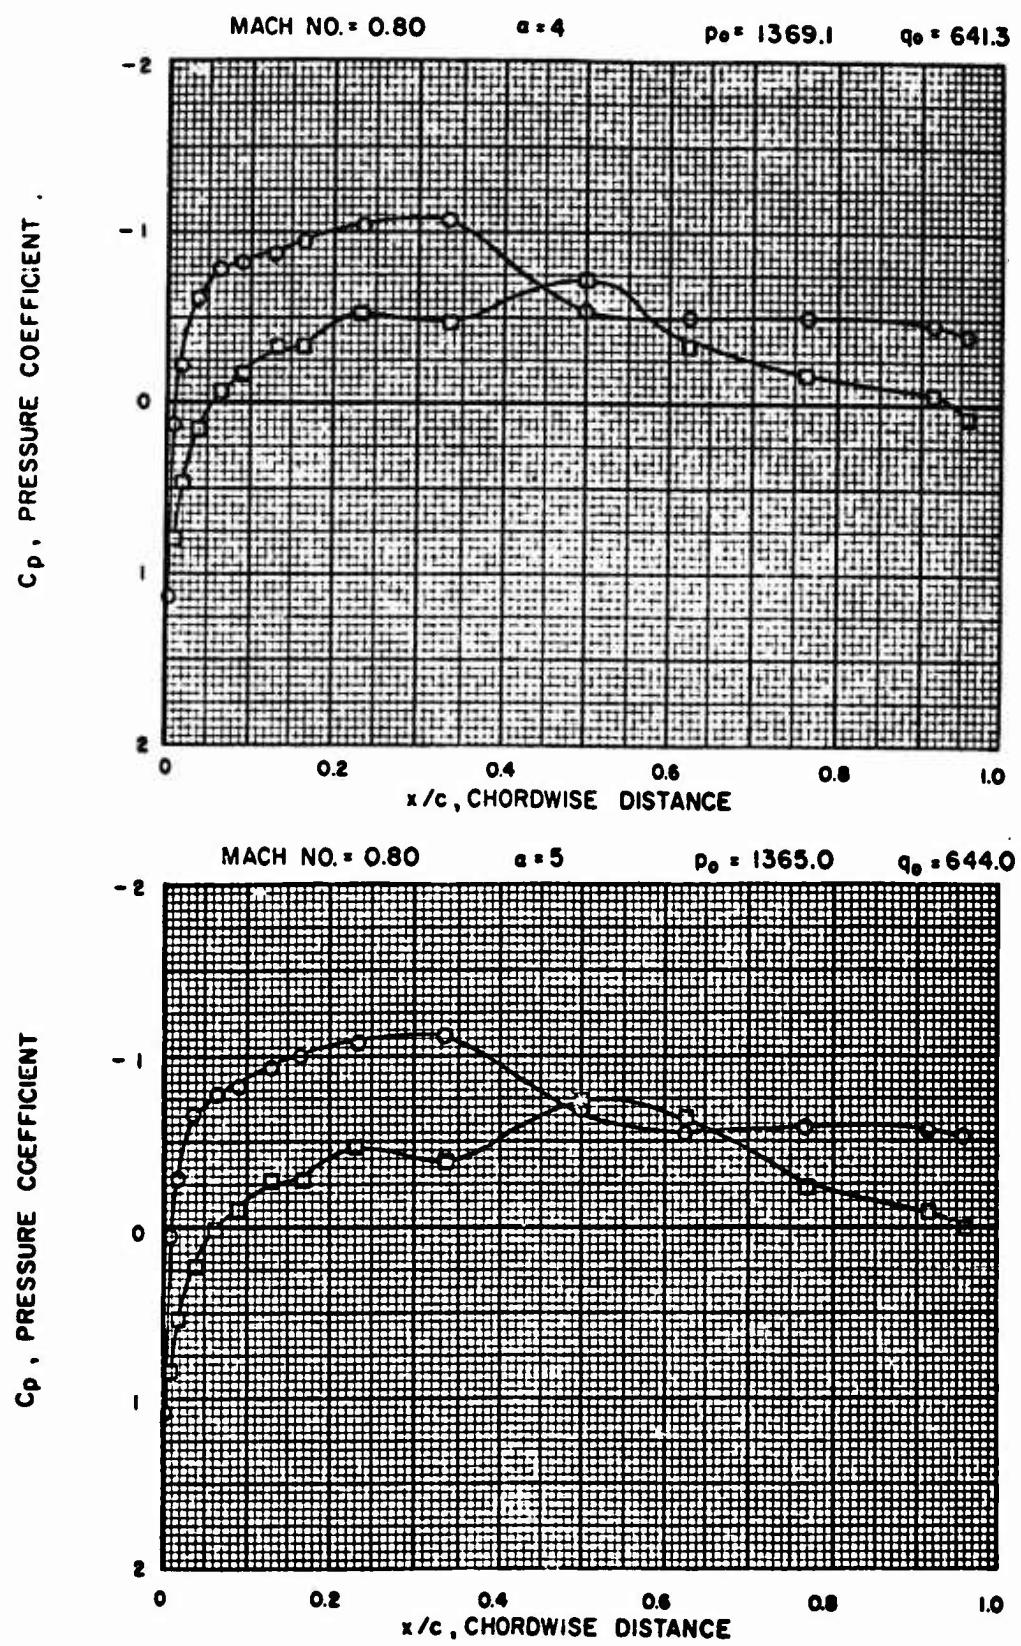


FIGURE 20 CHORDWISE PRESSURE COEFFICIENTS

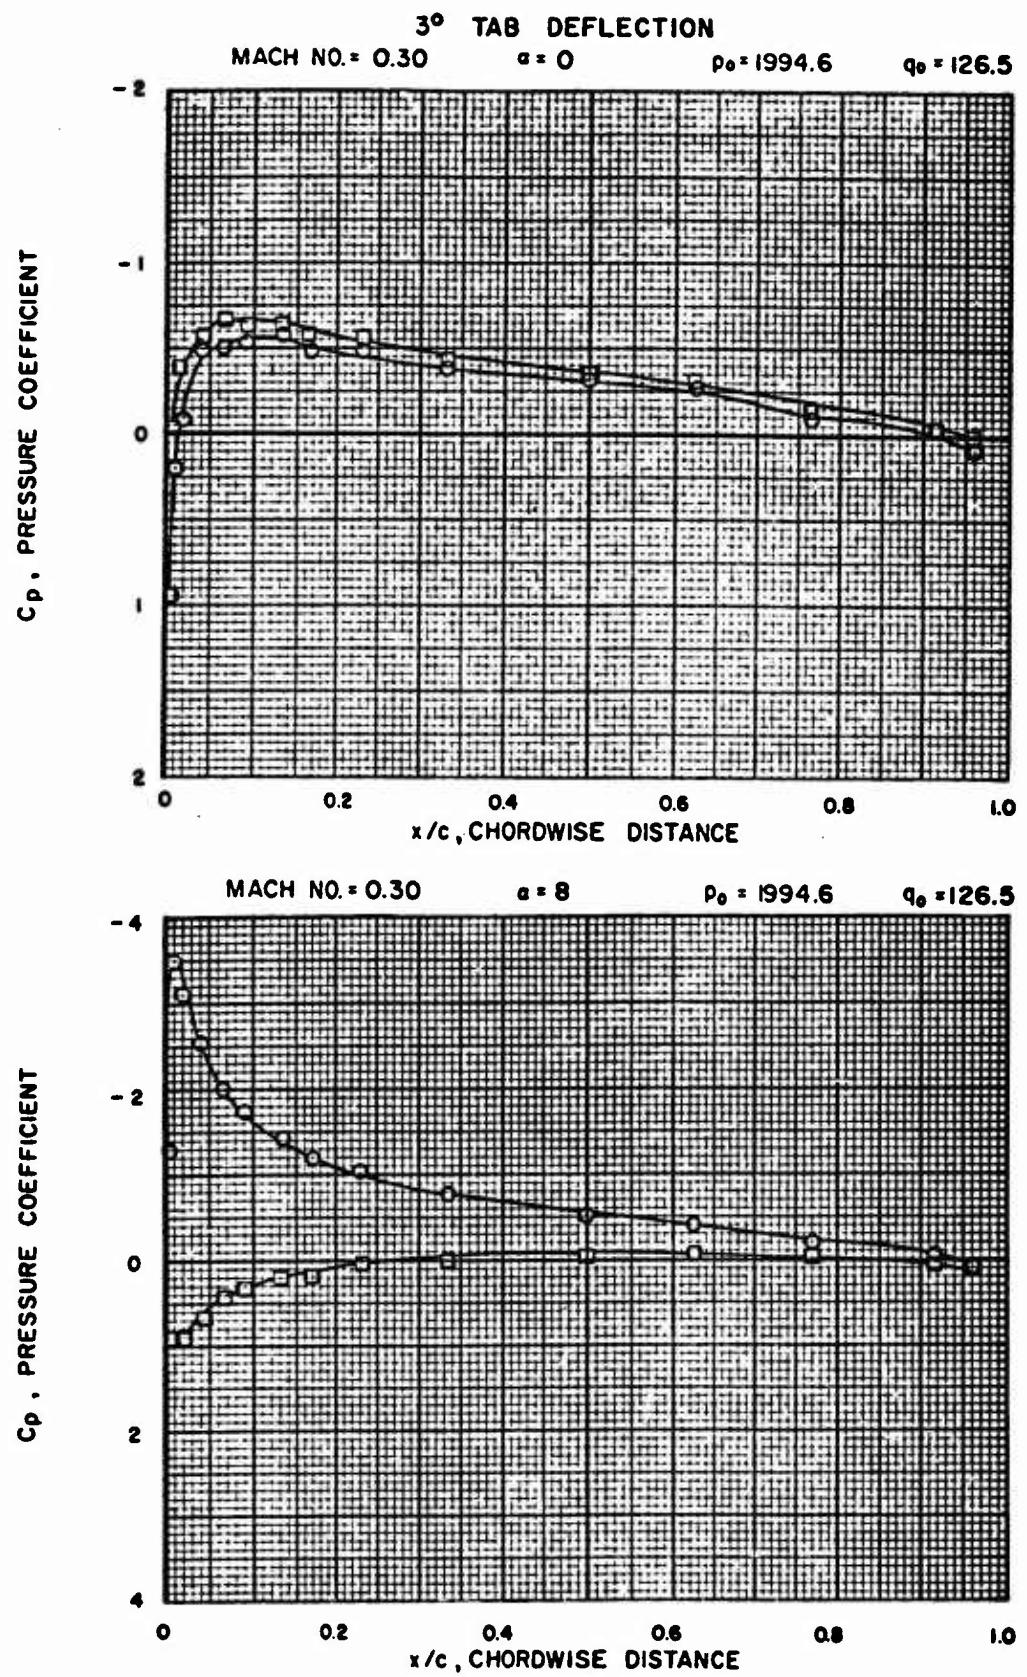


FIGURE 21 CHORDWISE PRESSURE COEFFICIENTS

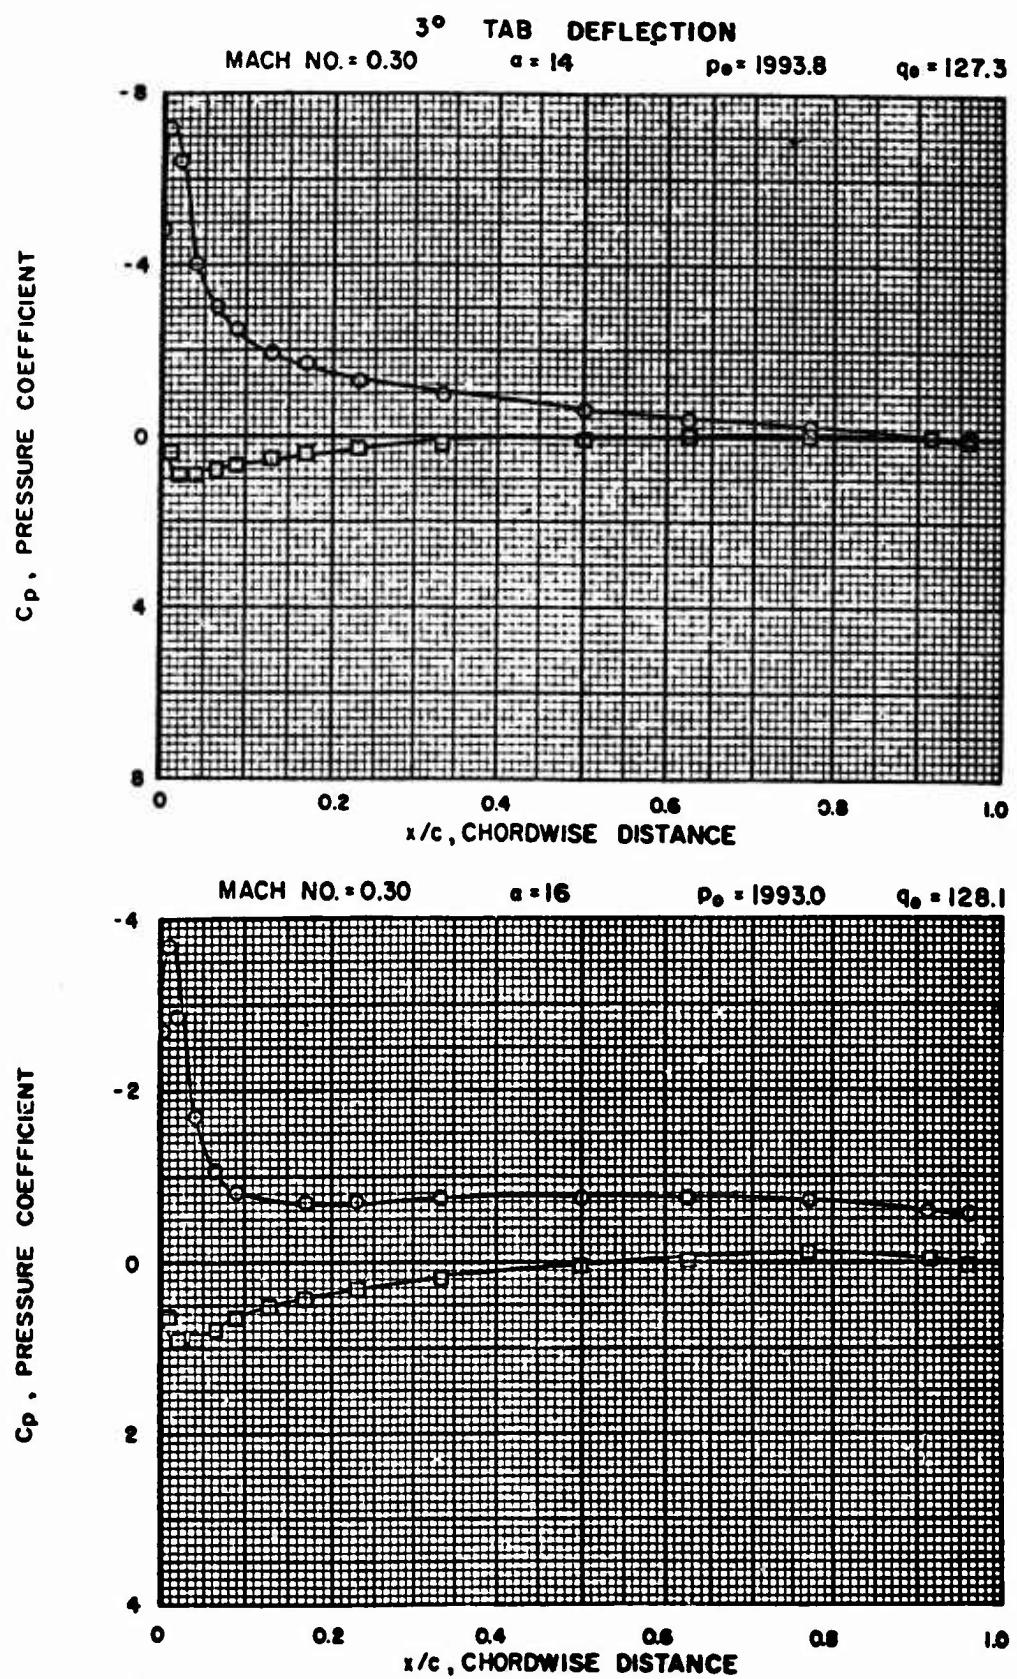


FIGURE 22 CHORDWISE PRESSURE COEFFICIENTS
39

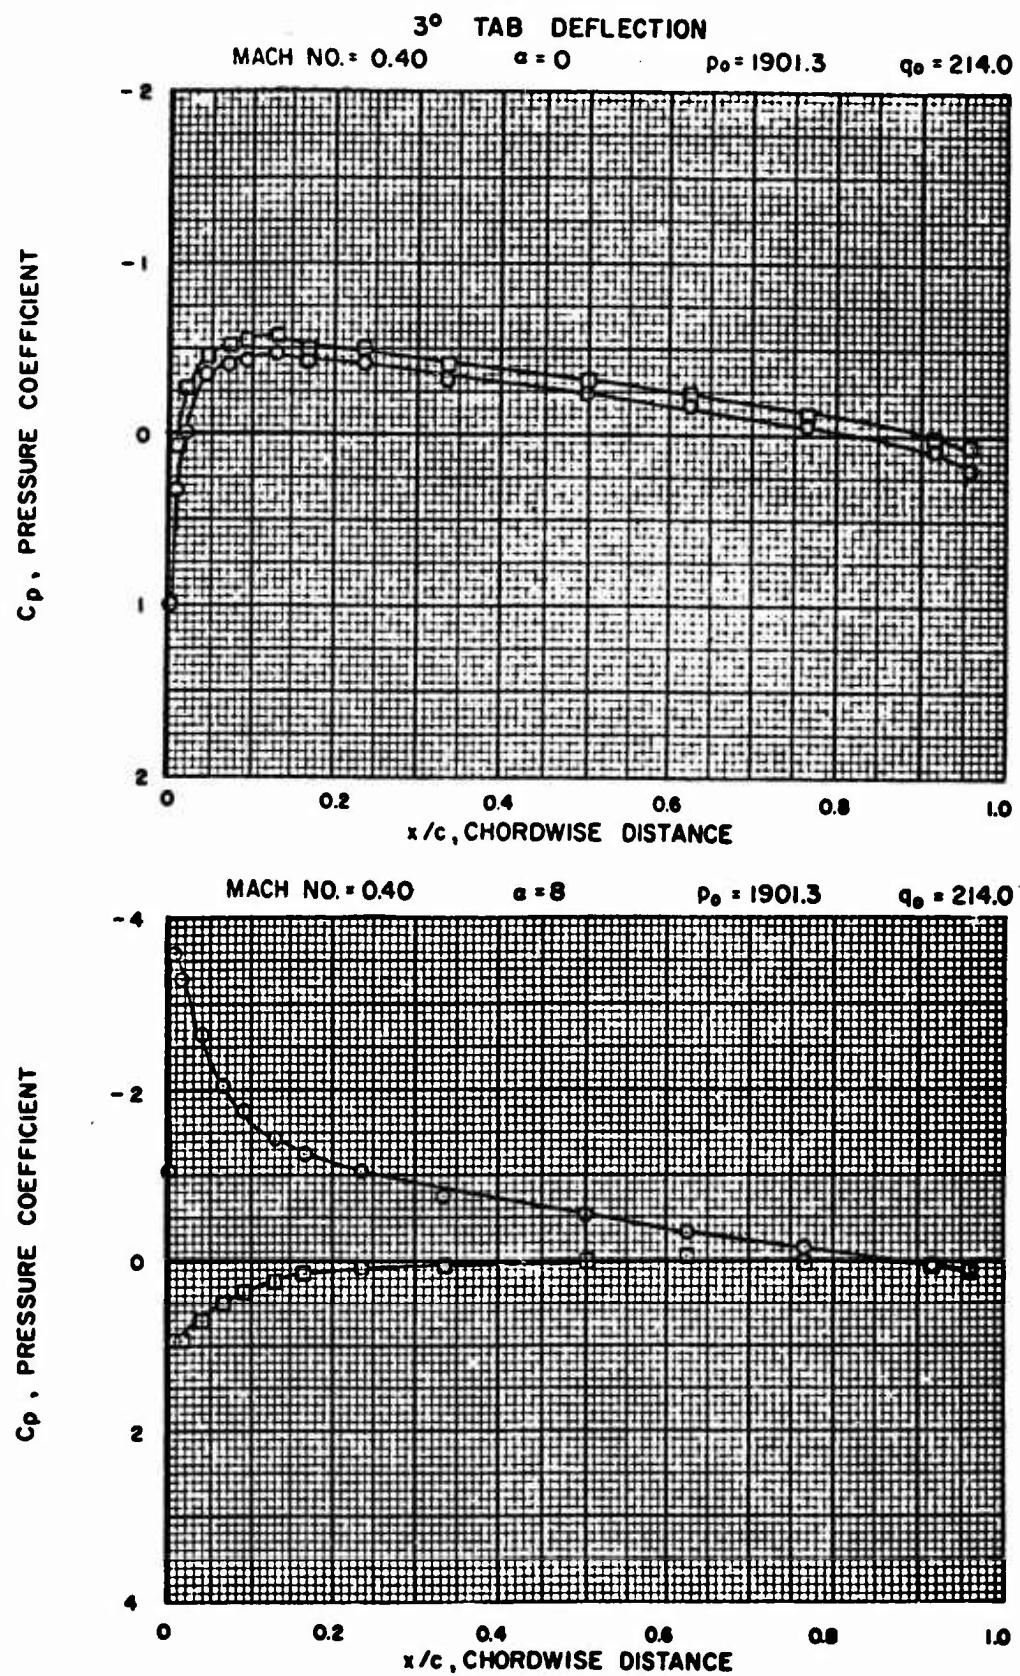


FIGURE 23 CHORDWISE PRESSURE COEFFICIENTS

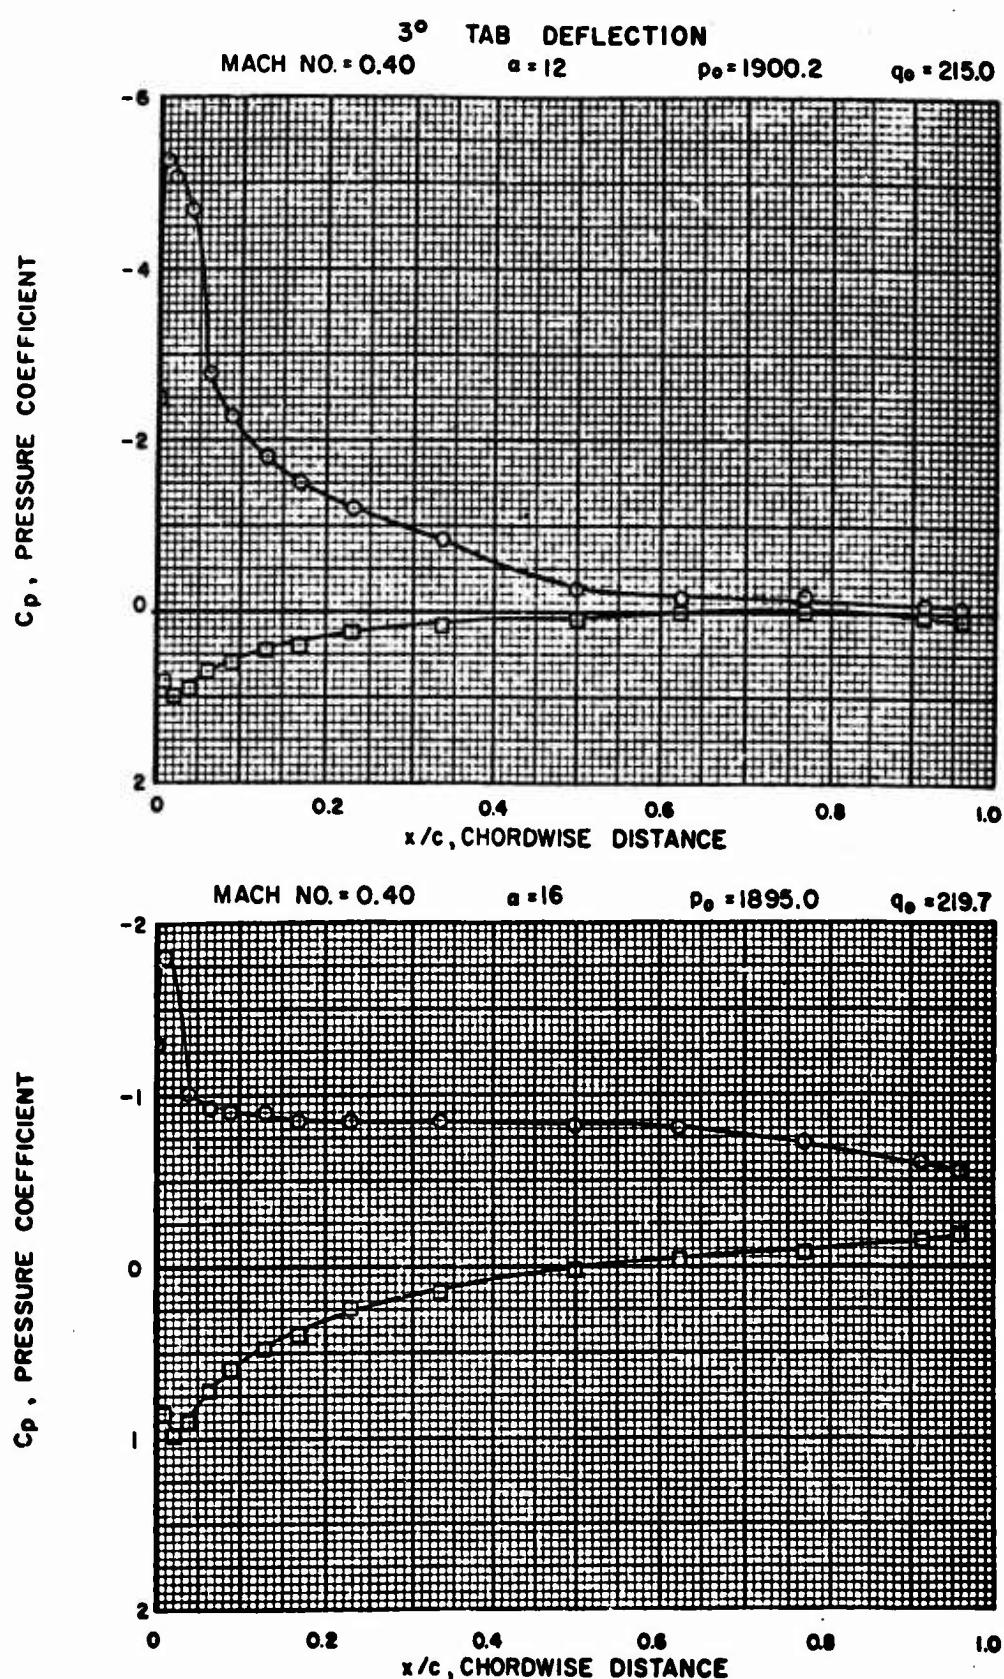


FIGURE 24 CHORDWISE PRESSURE COEFFICIENTS


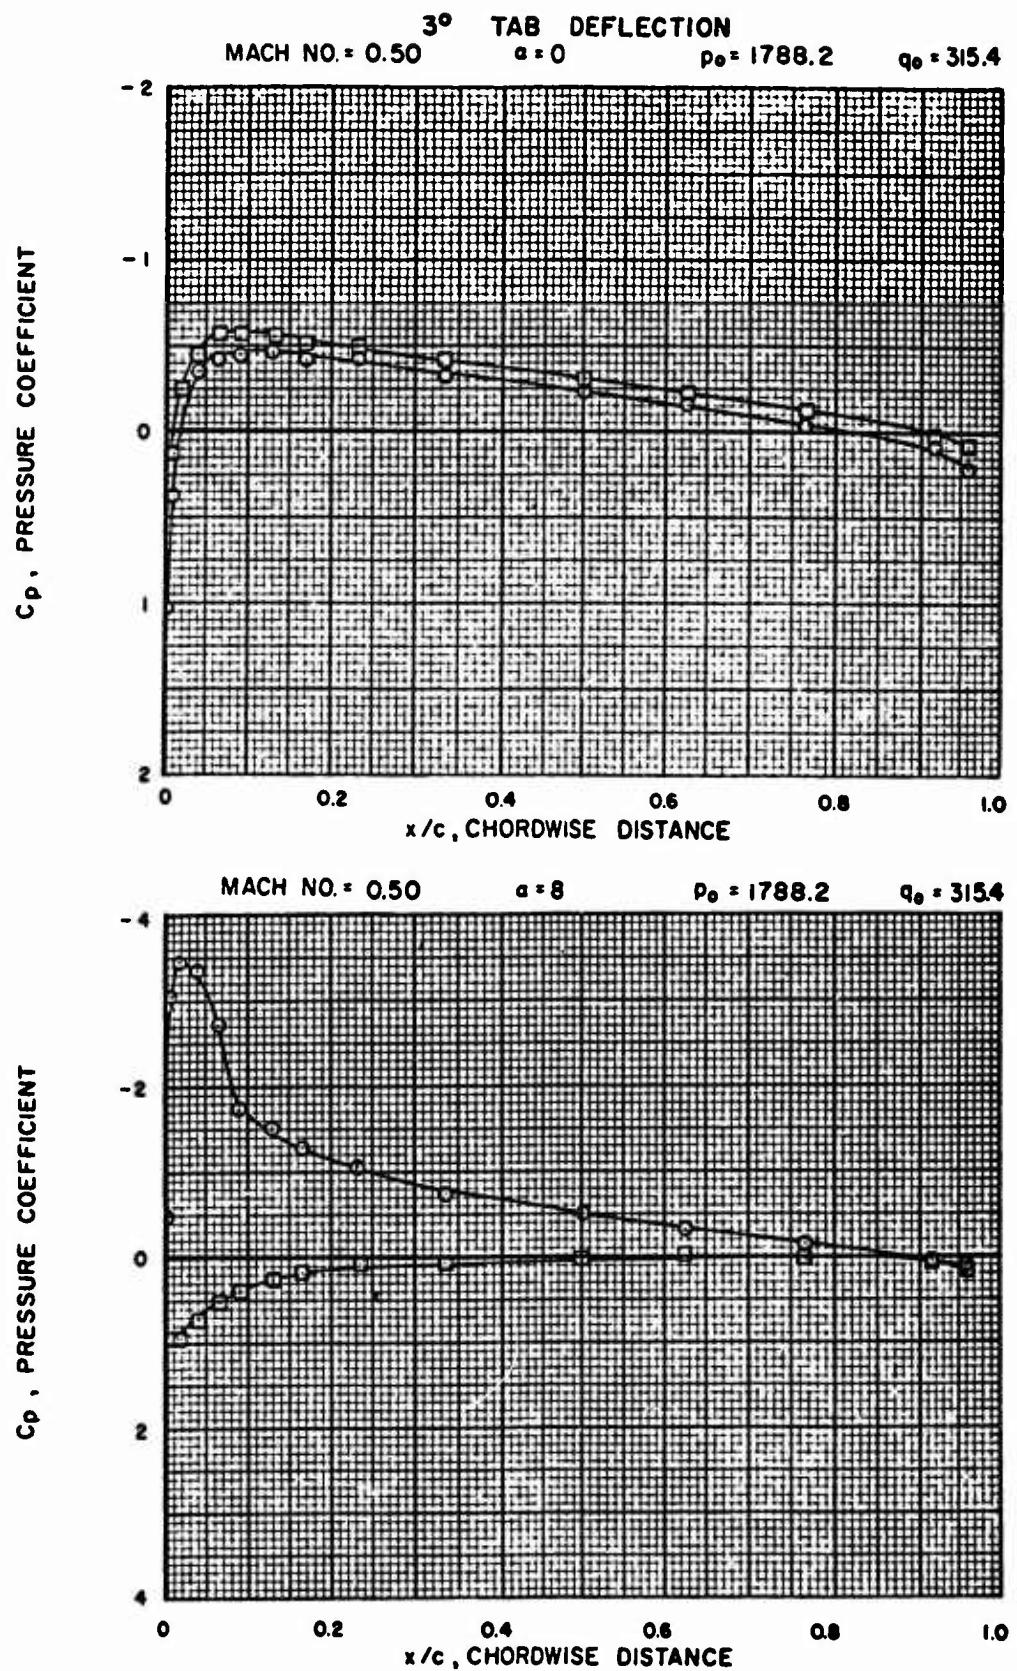


FIGURE 25 CHORDWISE PRESSURE COEFFICIENTS

MACH NO. = 0.5 3° TAB DEFLECTION
 $\alpha = 12$ $p_0 = 1783.4$ $q_0 = 319.6$

C_p, PRESSURE COEFFICIENT

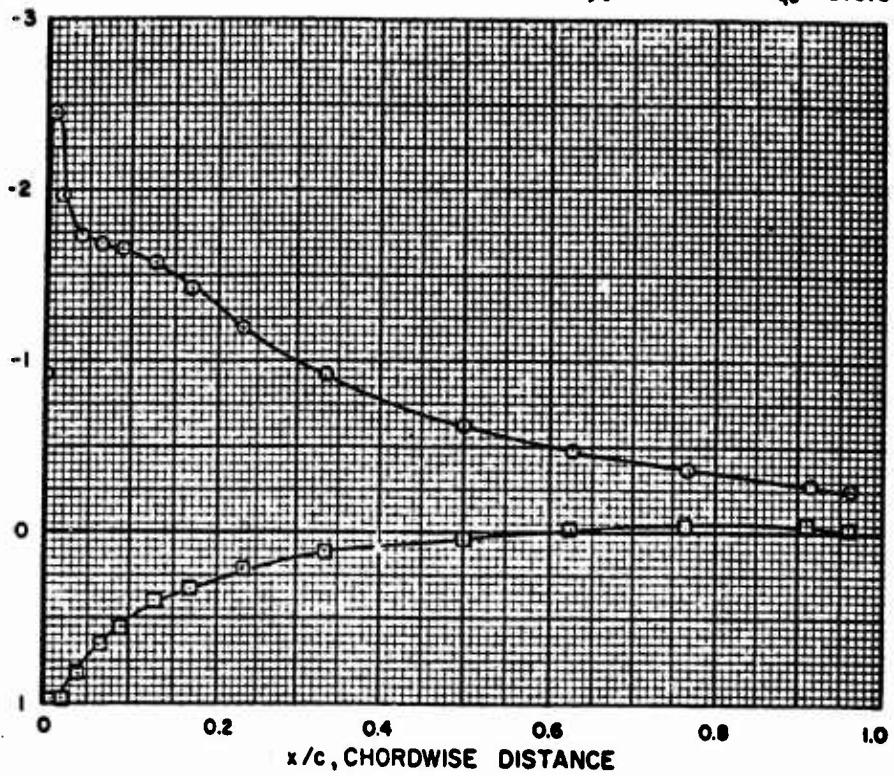

MACH NO. = 0.50 $\alpha = 16$ $p_0 = 1778.6$ $q_0 = 323.8$

C_p, PRESSURE COEFFICIENT

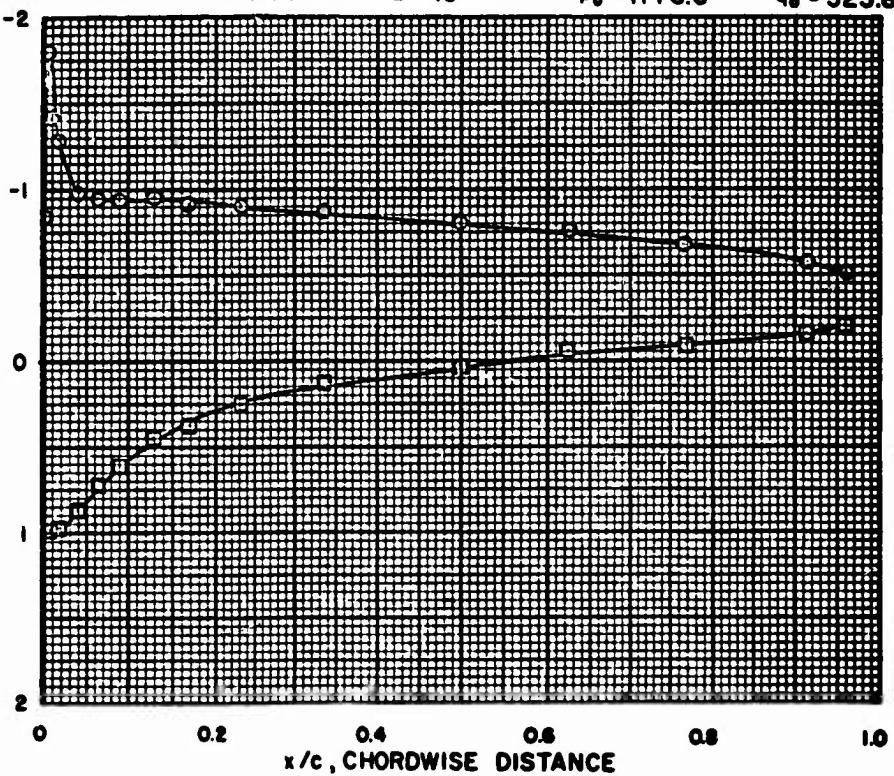


FIGURE 26 CHORDWISE PRESSURE COEFFICIENTS

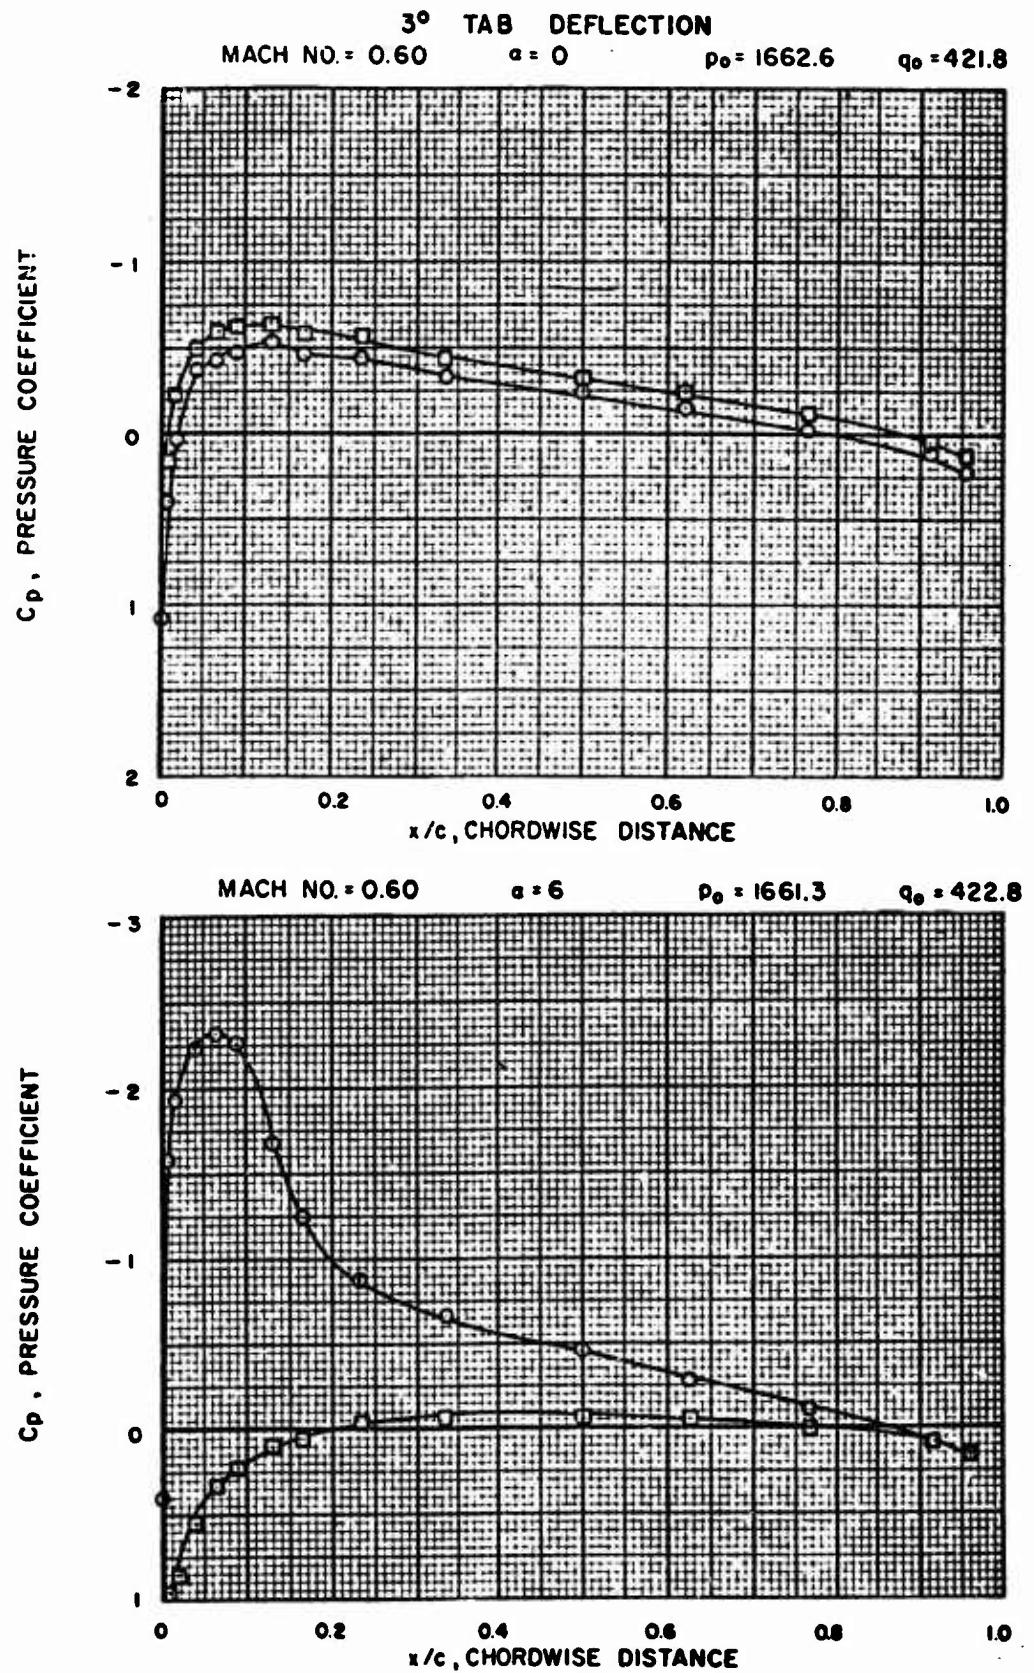


FIGURE 27 CHORDWISE PRESSURE COEFFICIENTS

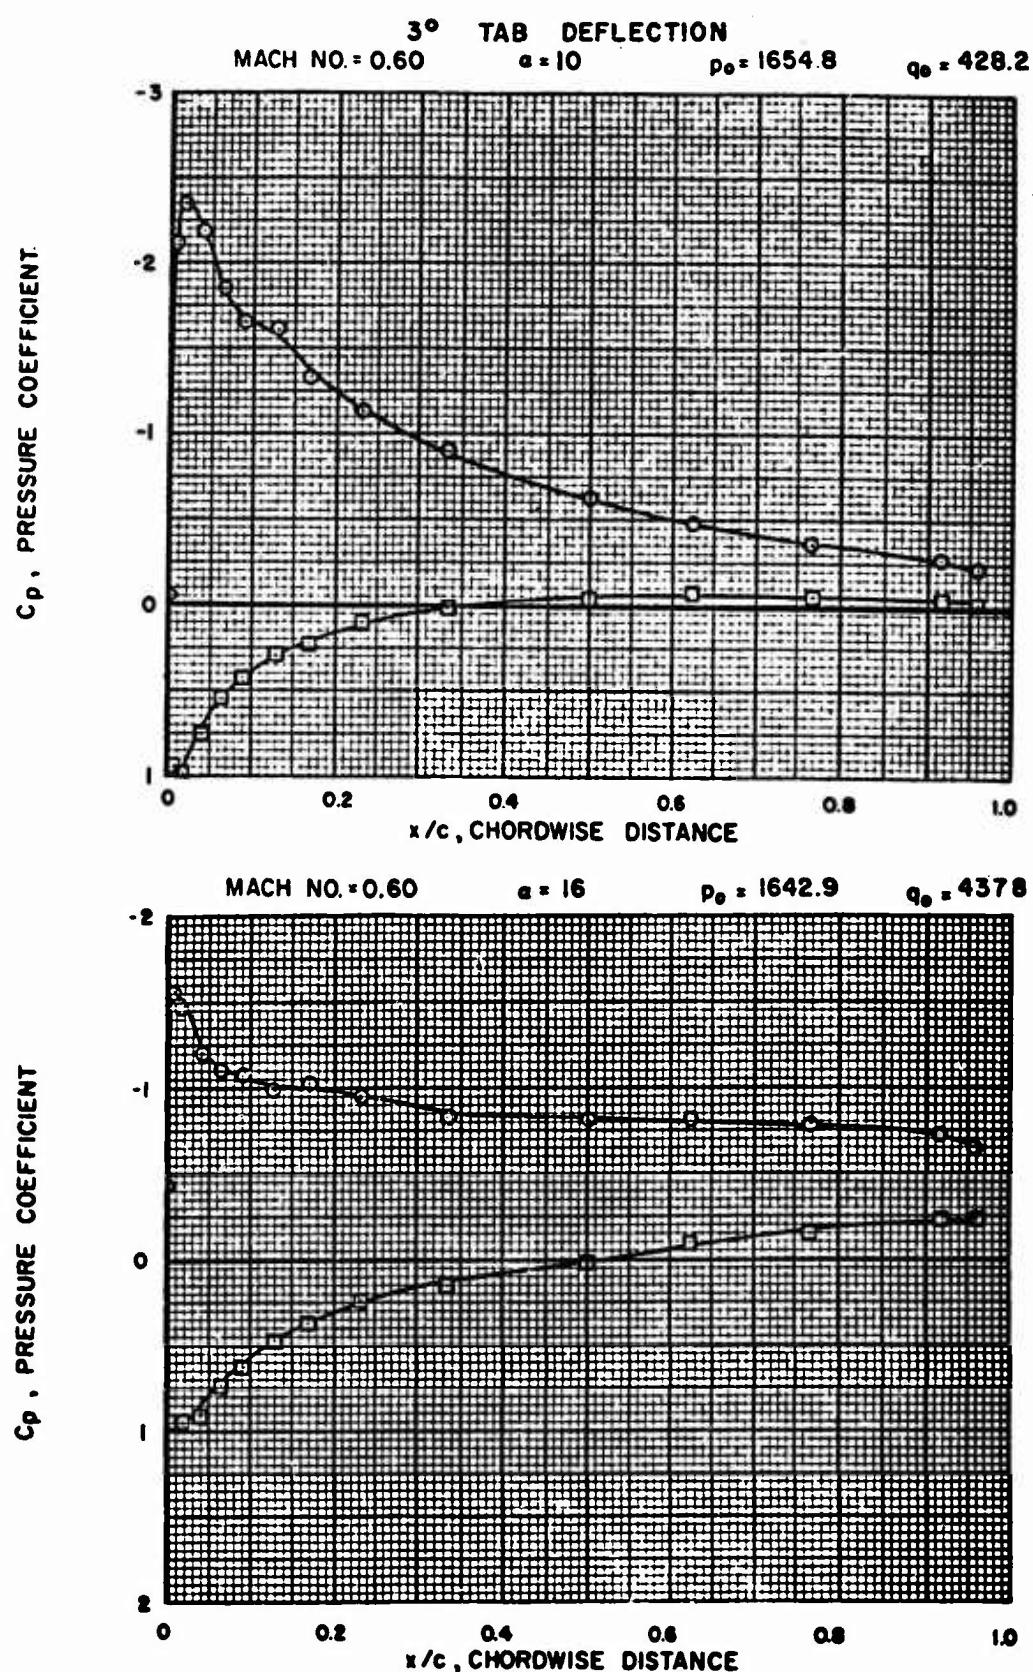


FIGURE 28 CHORDWISE PRESSURE COEFFICIENTS

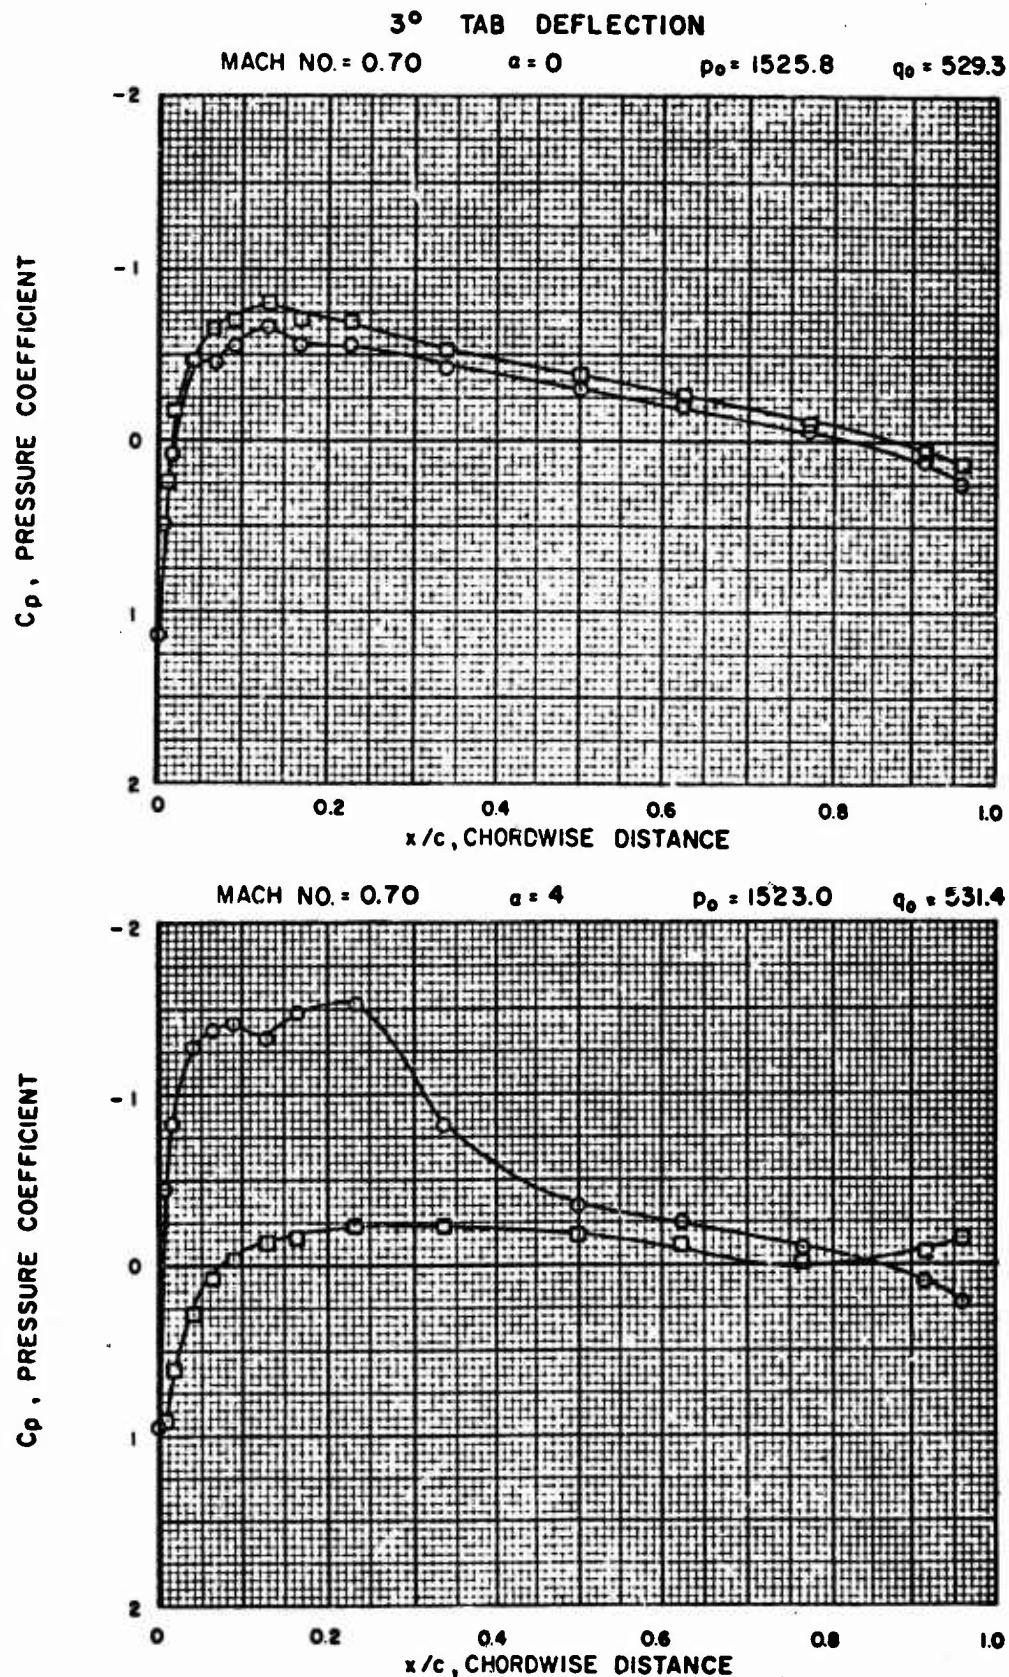


FIGURE 29 CHORDWISE PRESSURE COEFFICIENTS

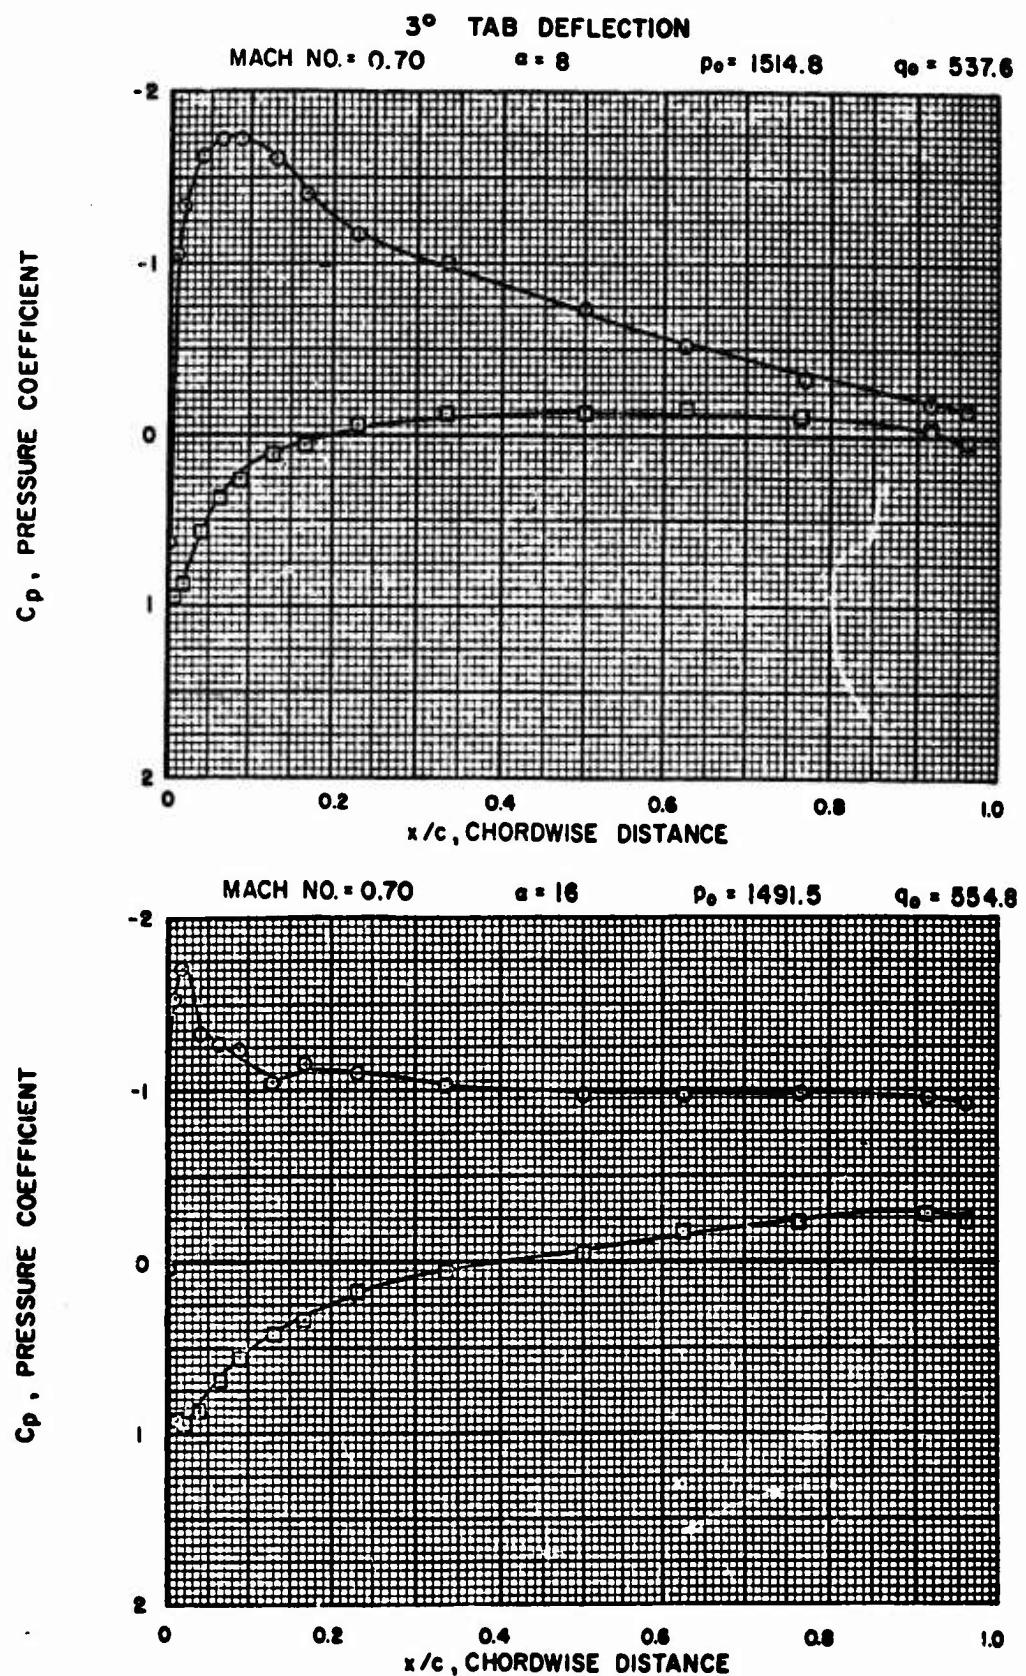


FIGURE 30 CHORDWISE PRESSURE COEFFICIENTS

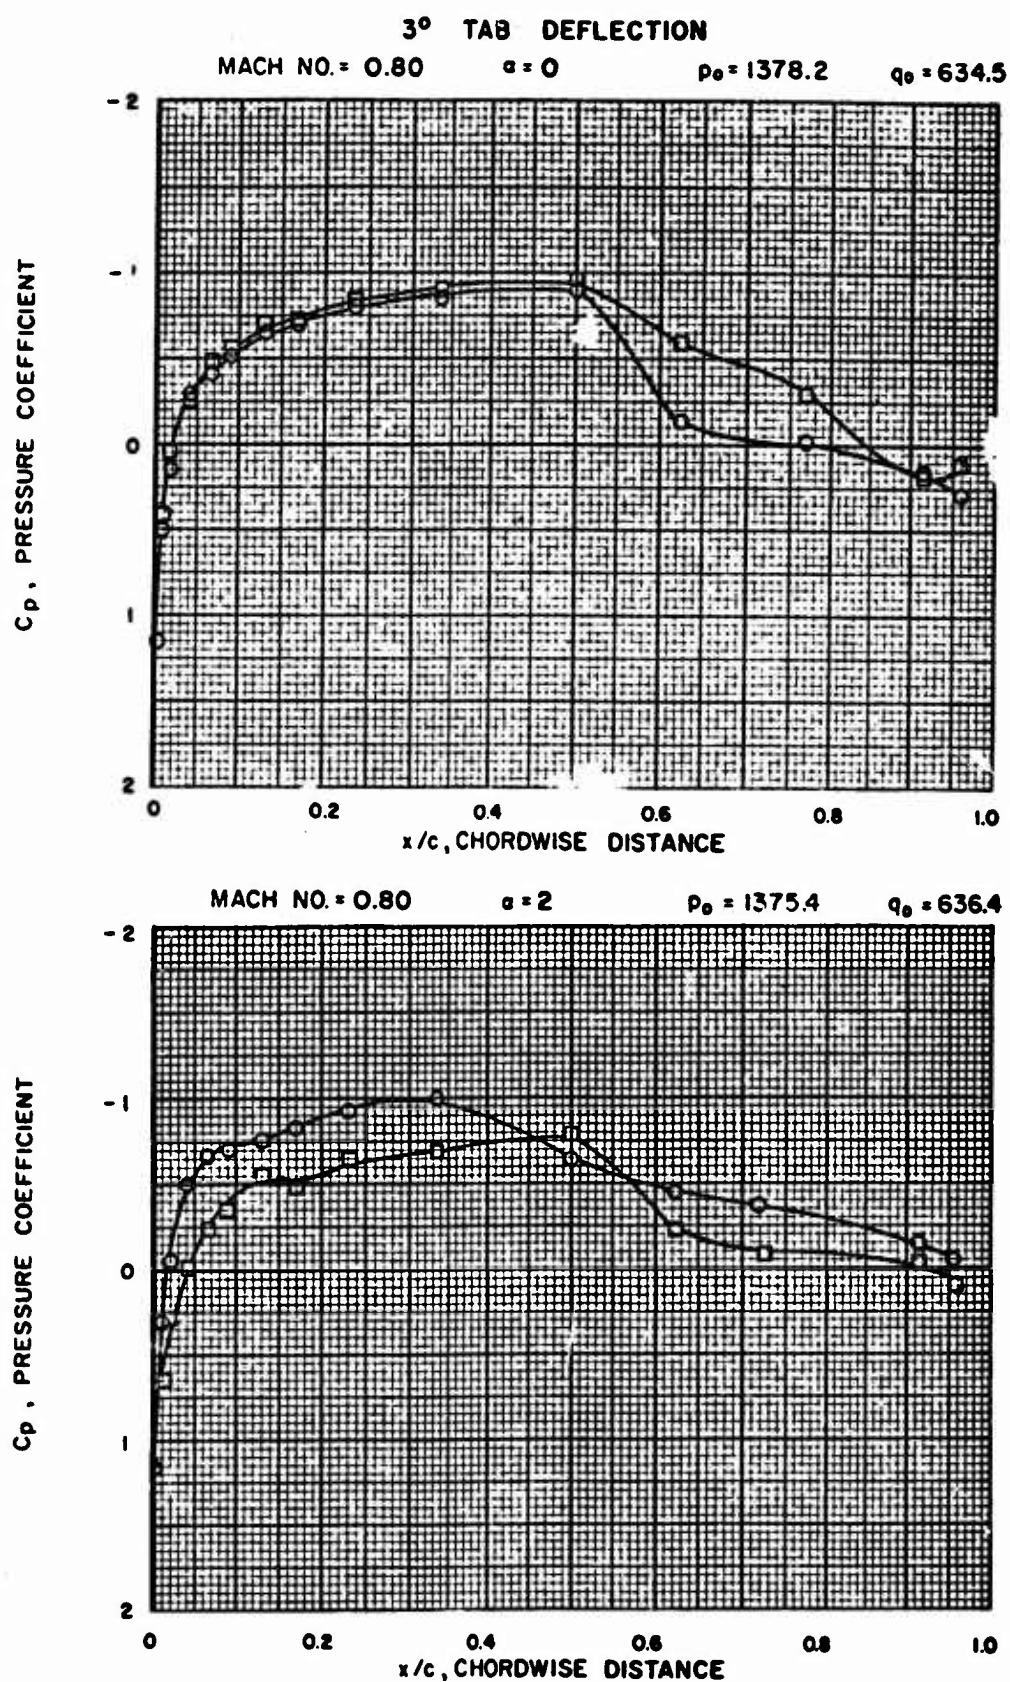


FIGURE 31 CHORDWISE PRESSURE COEFFICIENTS

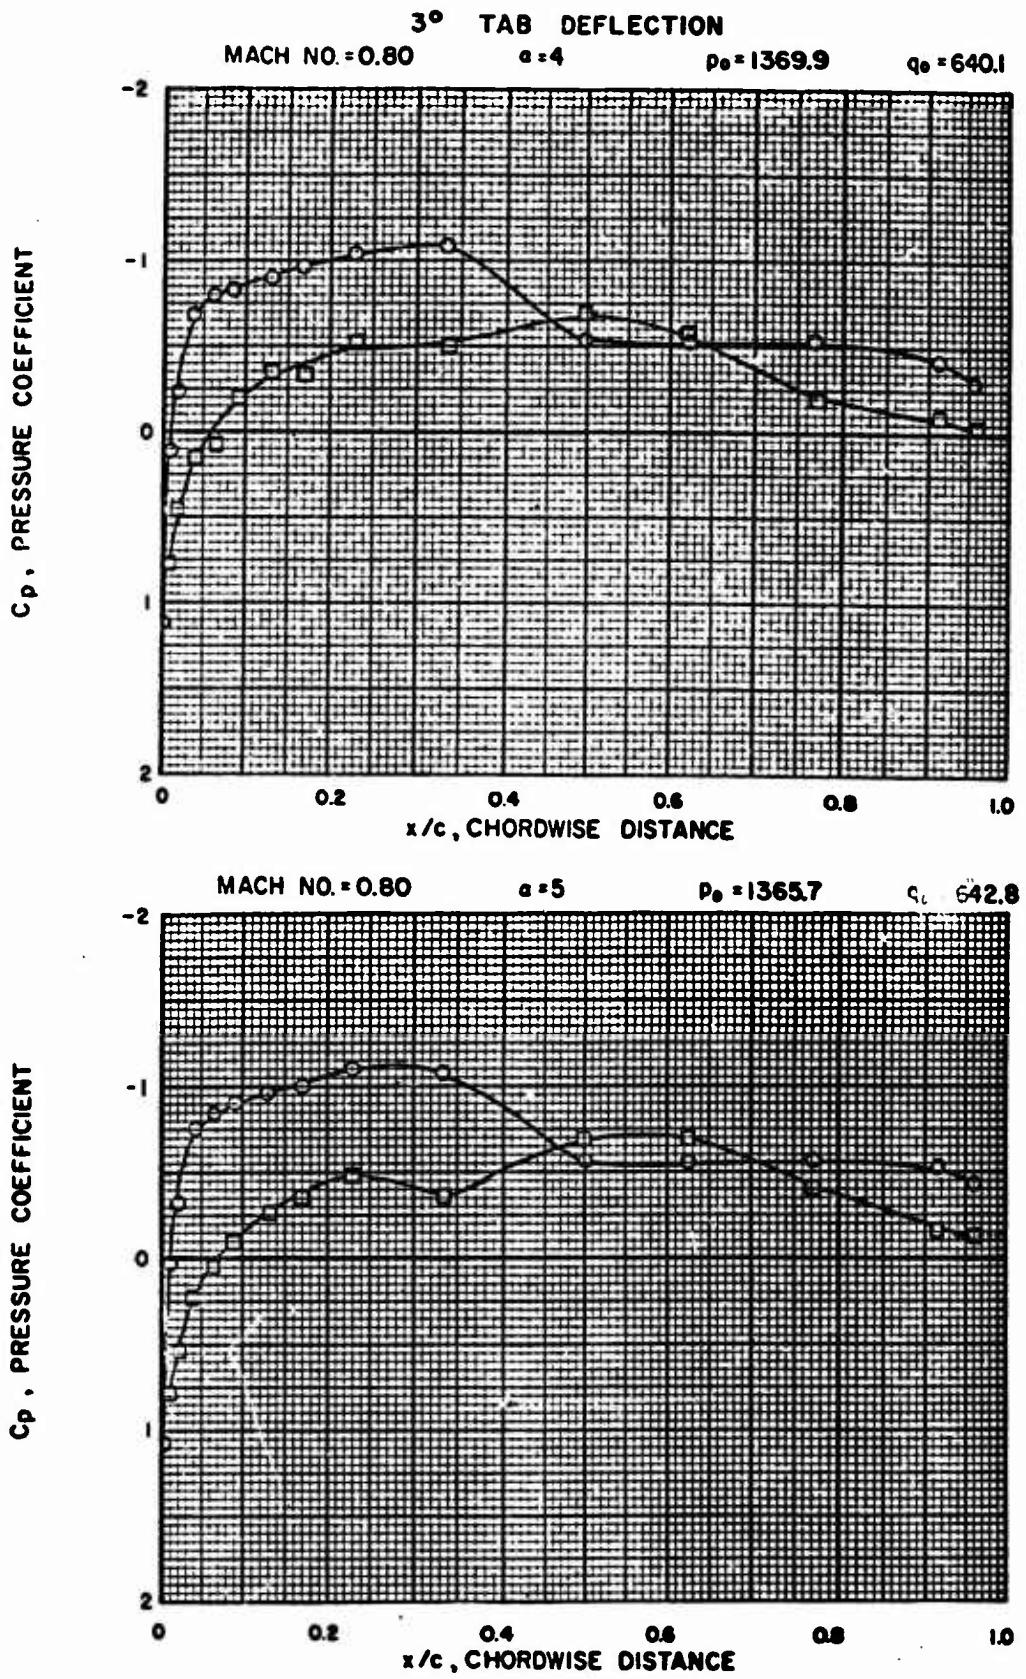


FIGURE 32 CHORDWISE PRESSURE COEFFICIENTS

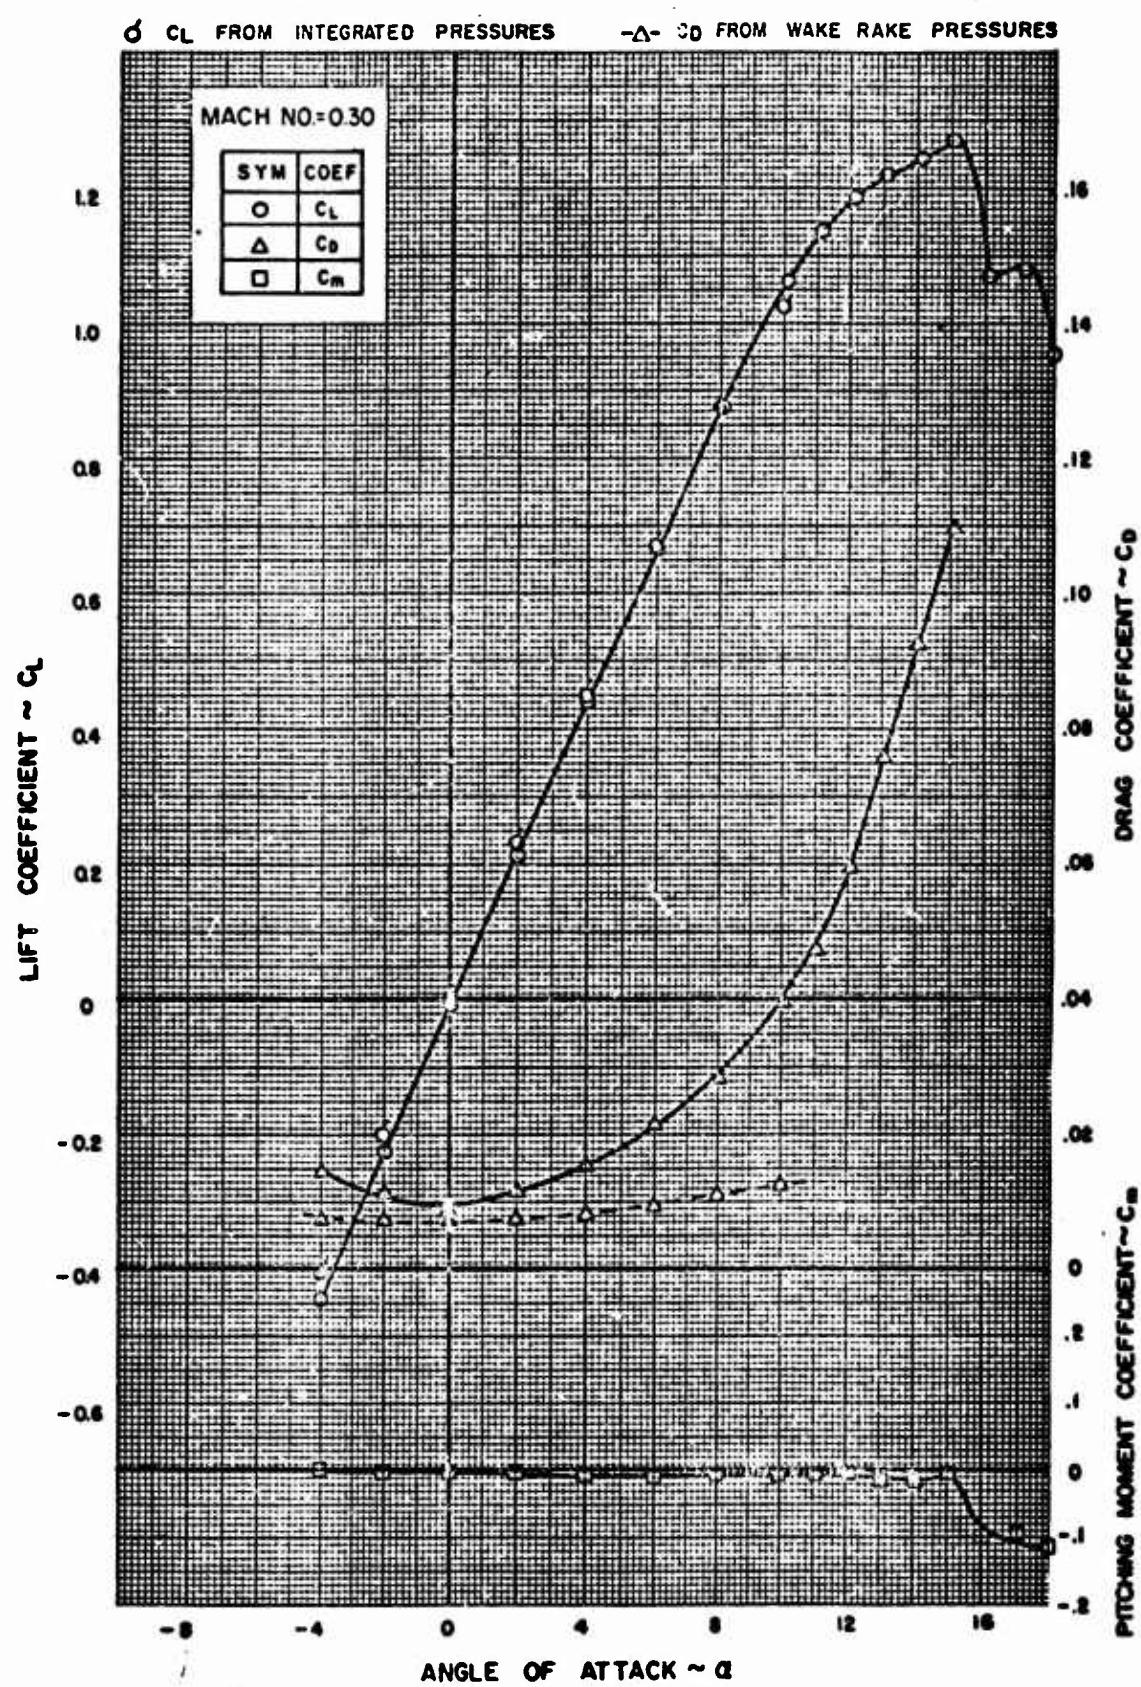


FIGURE 33. VARIATION OF FORCE COEFFICIENTS WITH ANGLE
 OF ATTACK

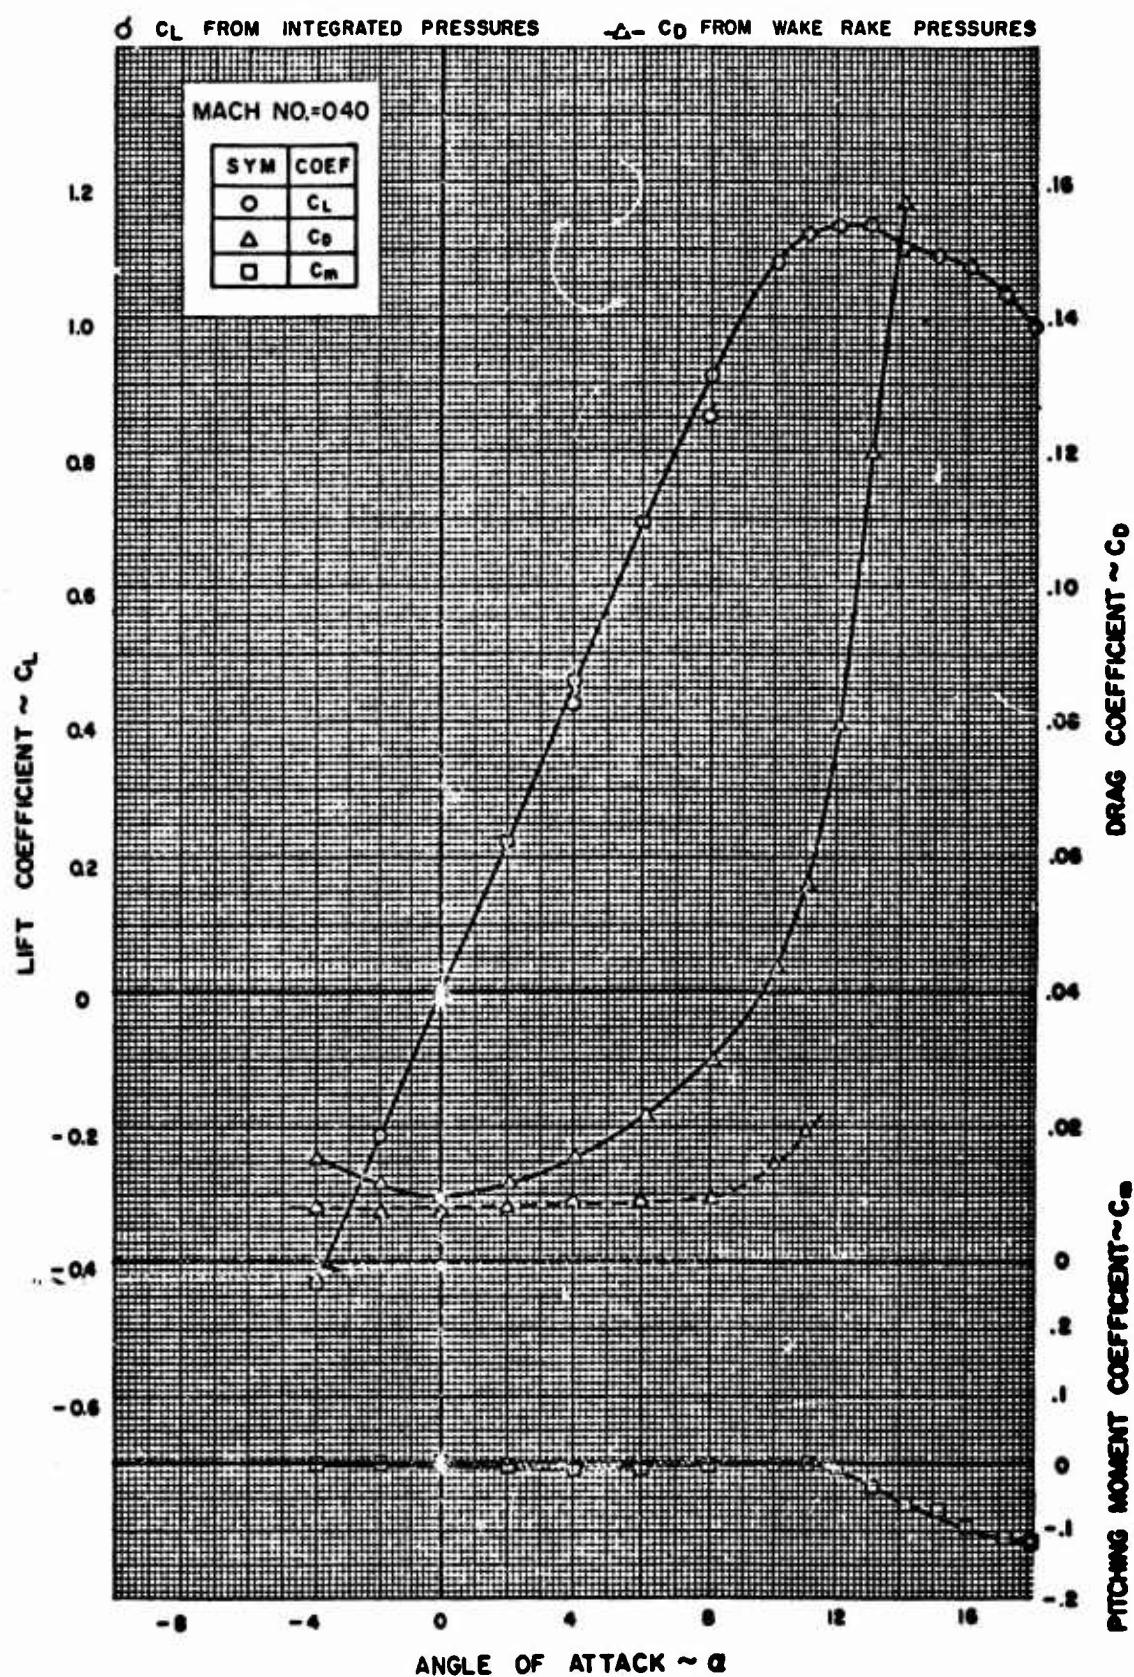


FIGURE 34. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

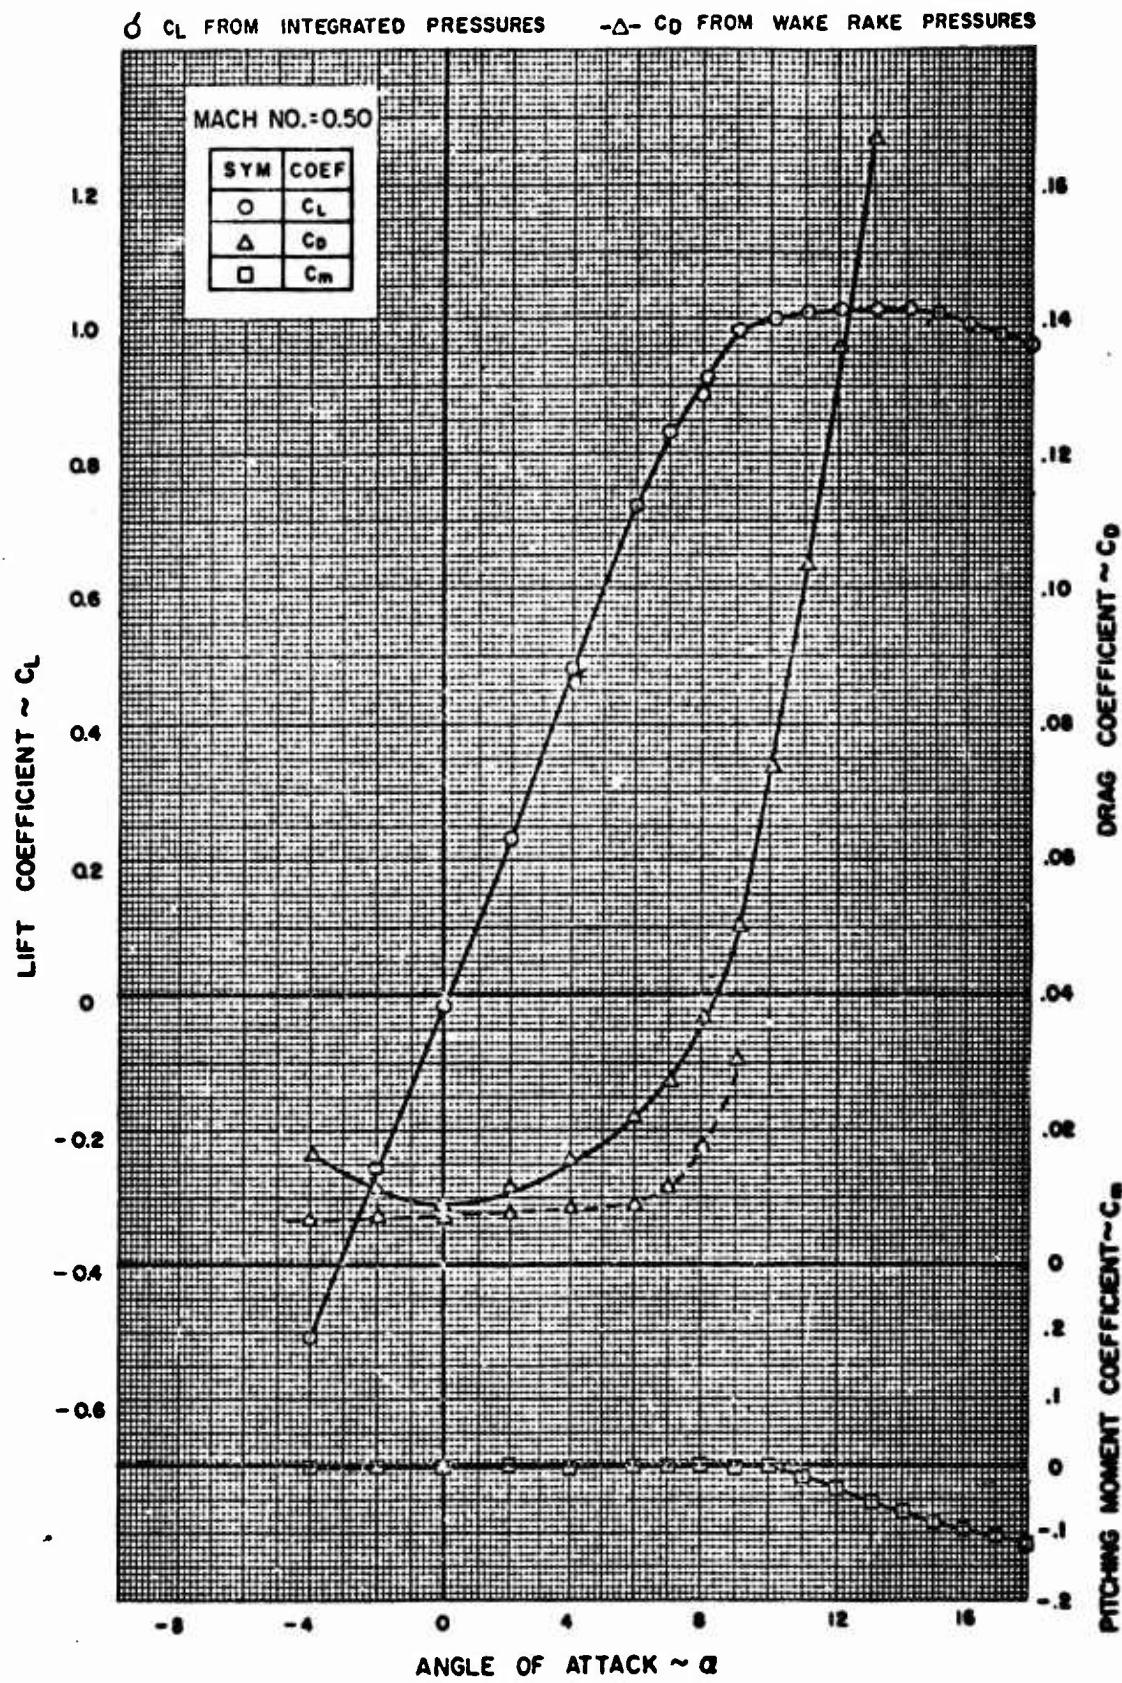


FIGURE 35. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

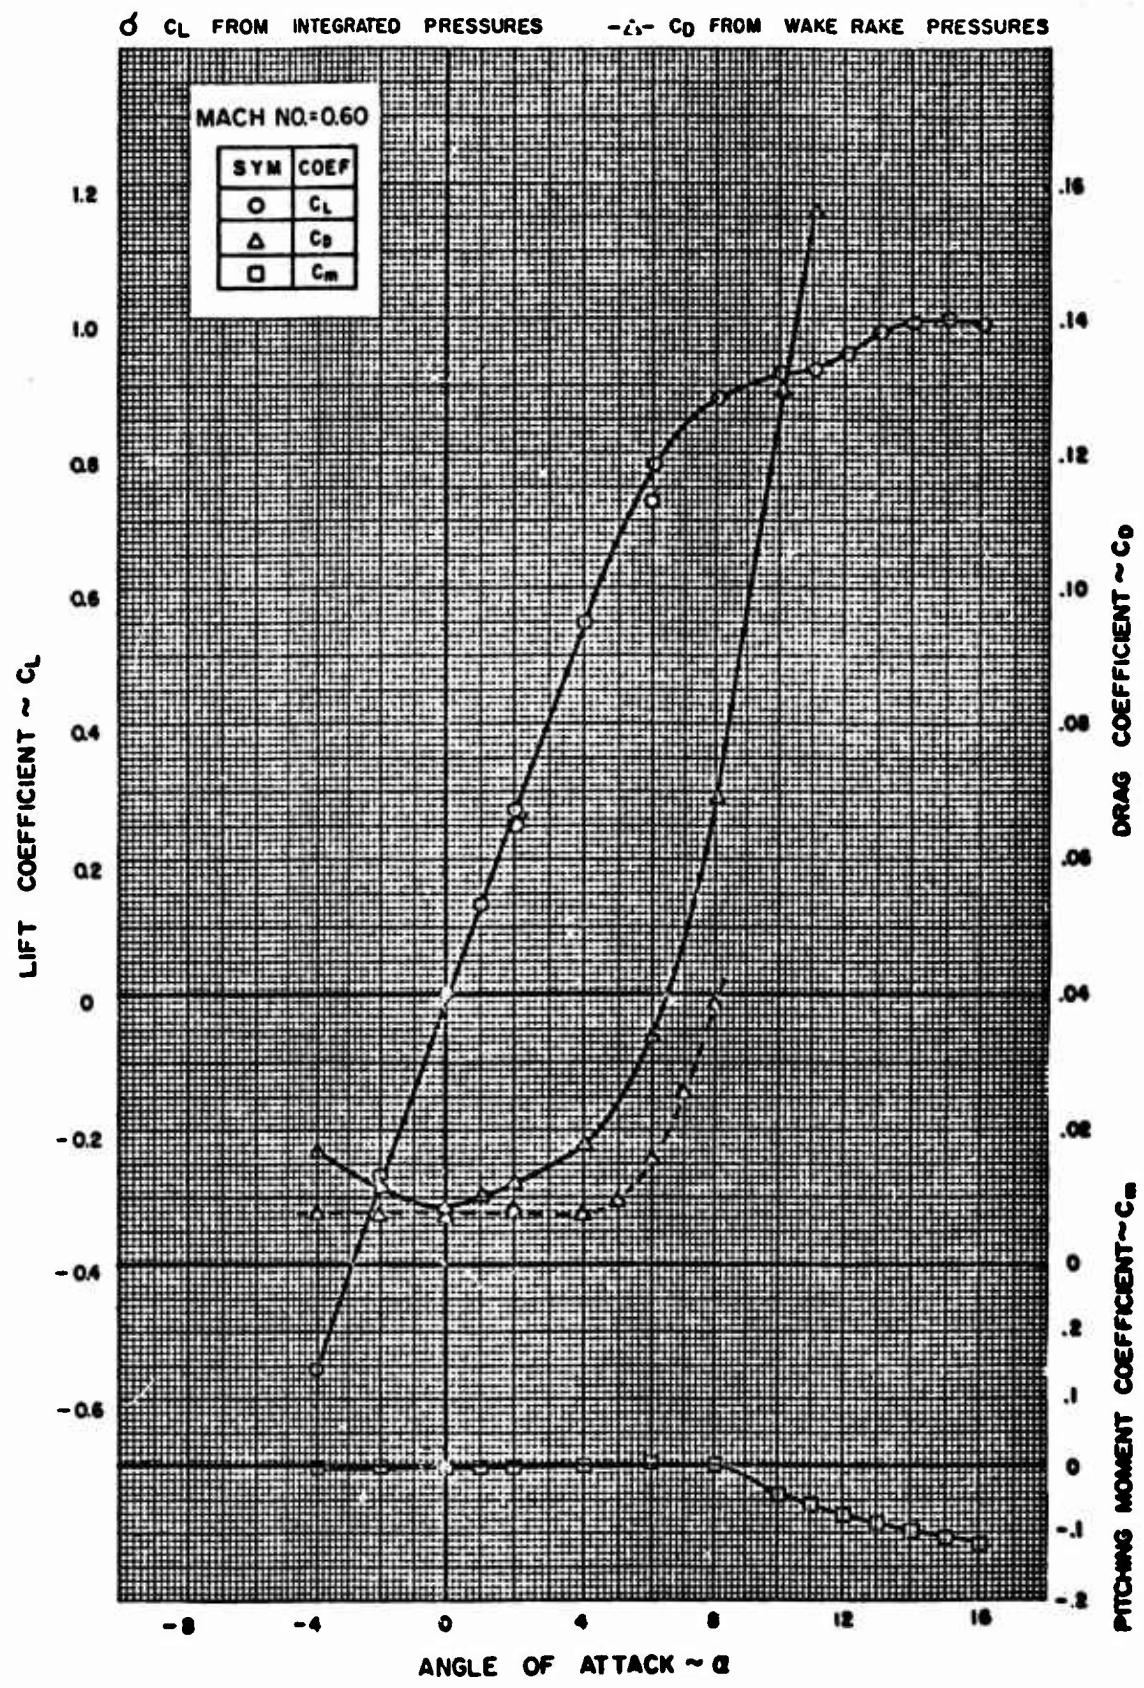


FIGURE 36. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

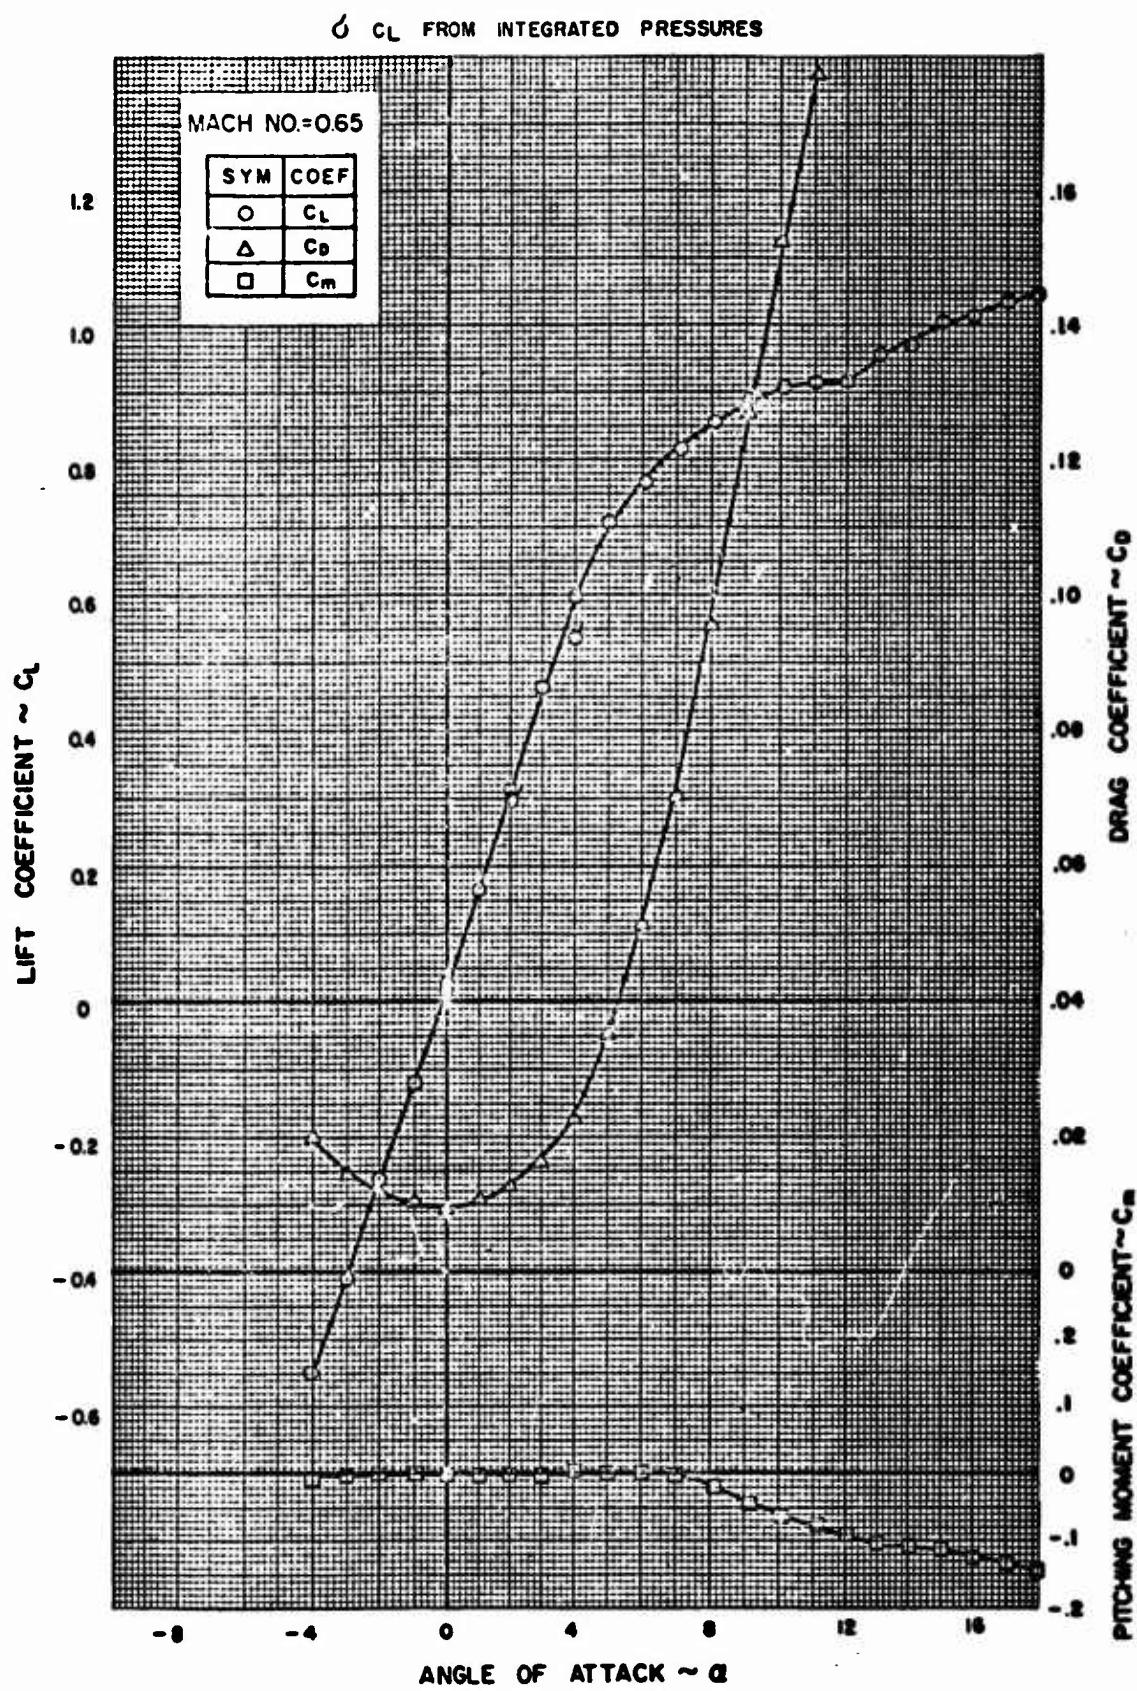


FIGURE 37. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

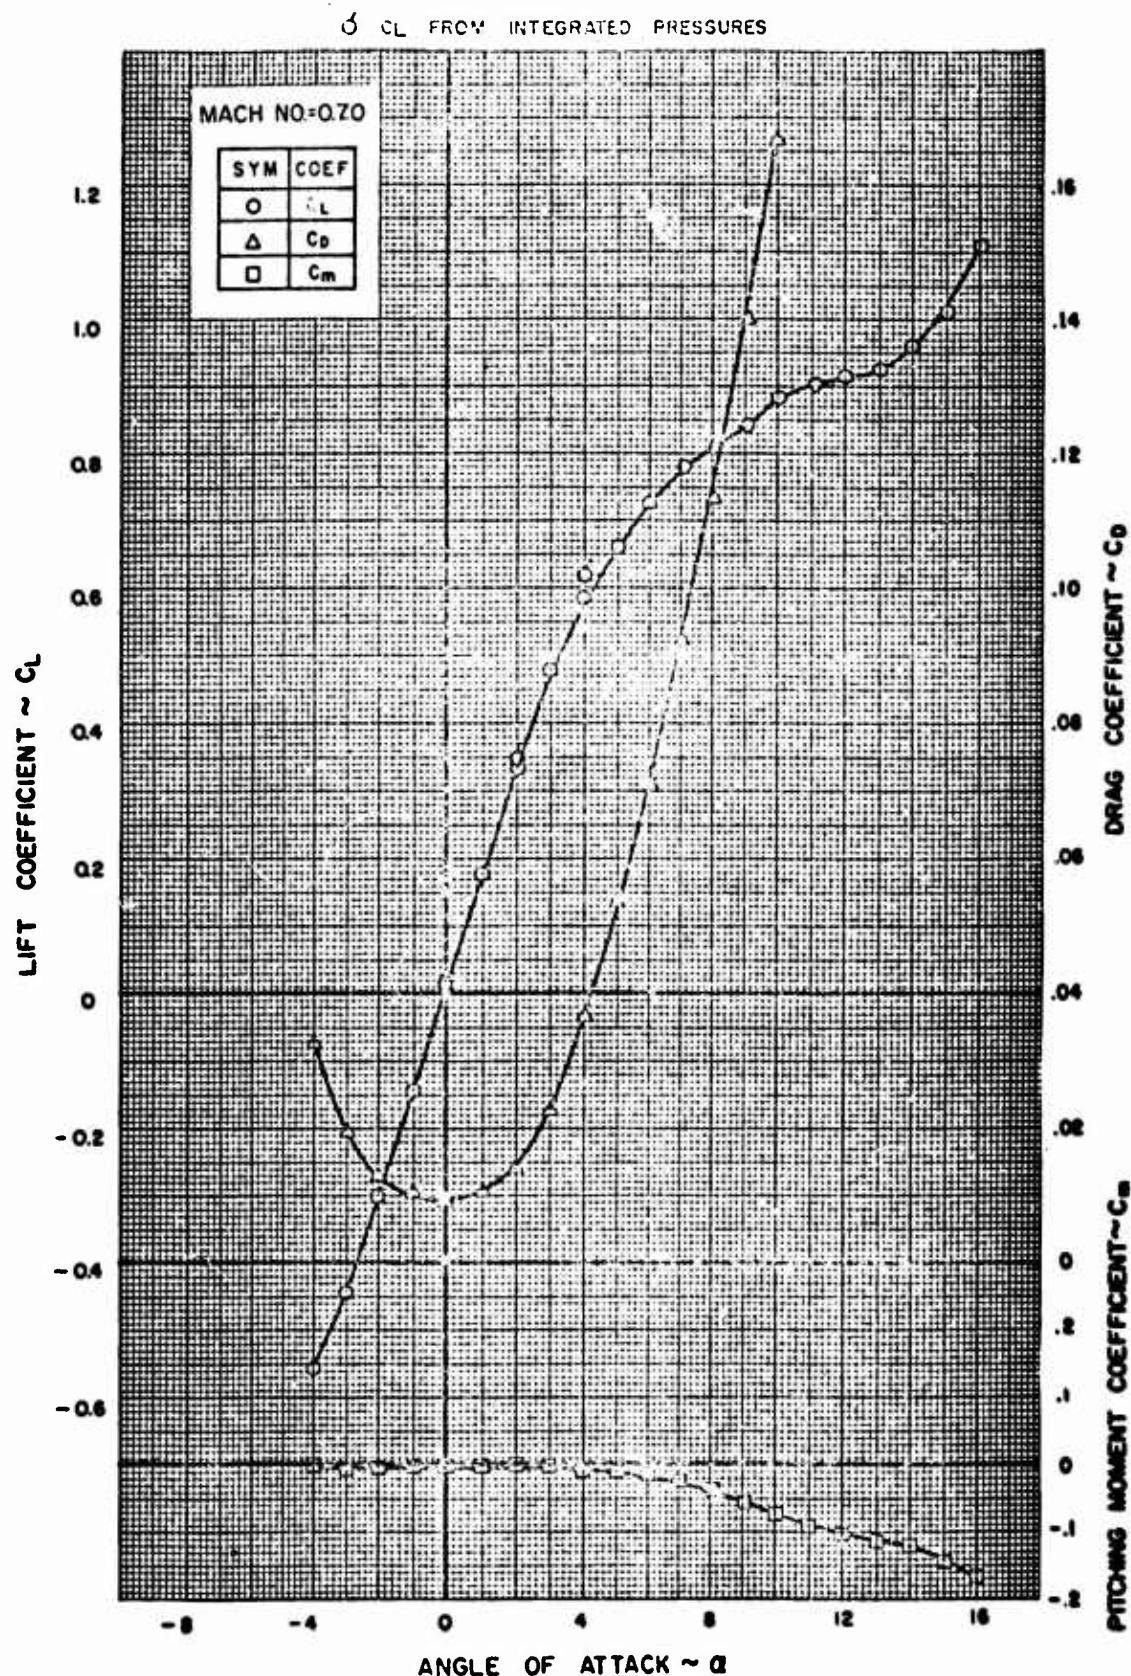


FIGURE 38. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

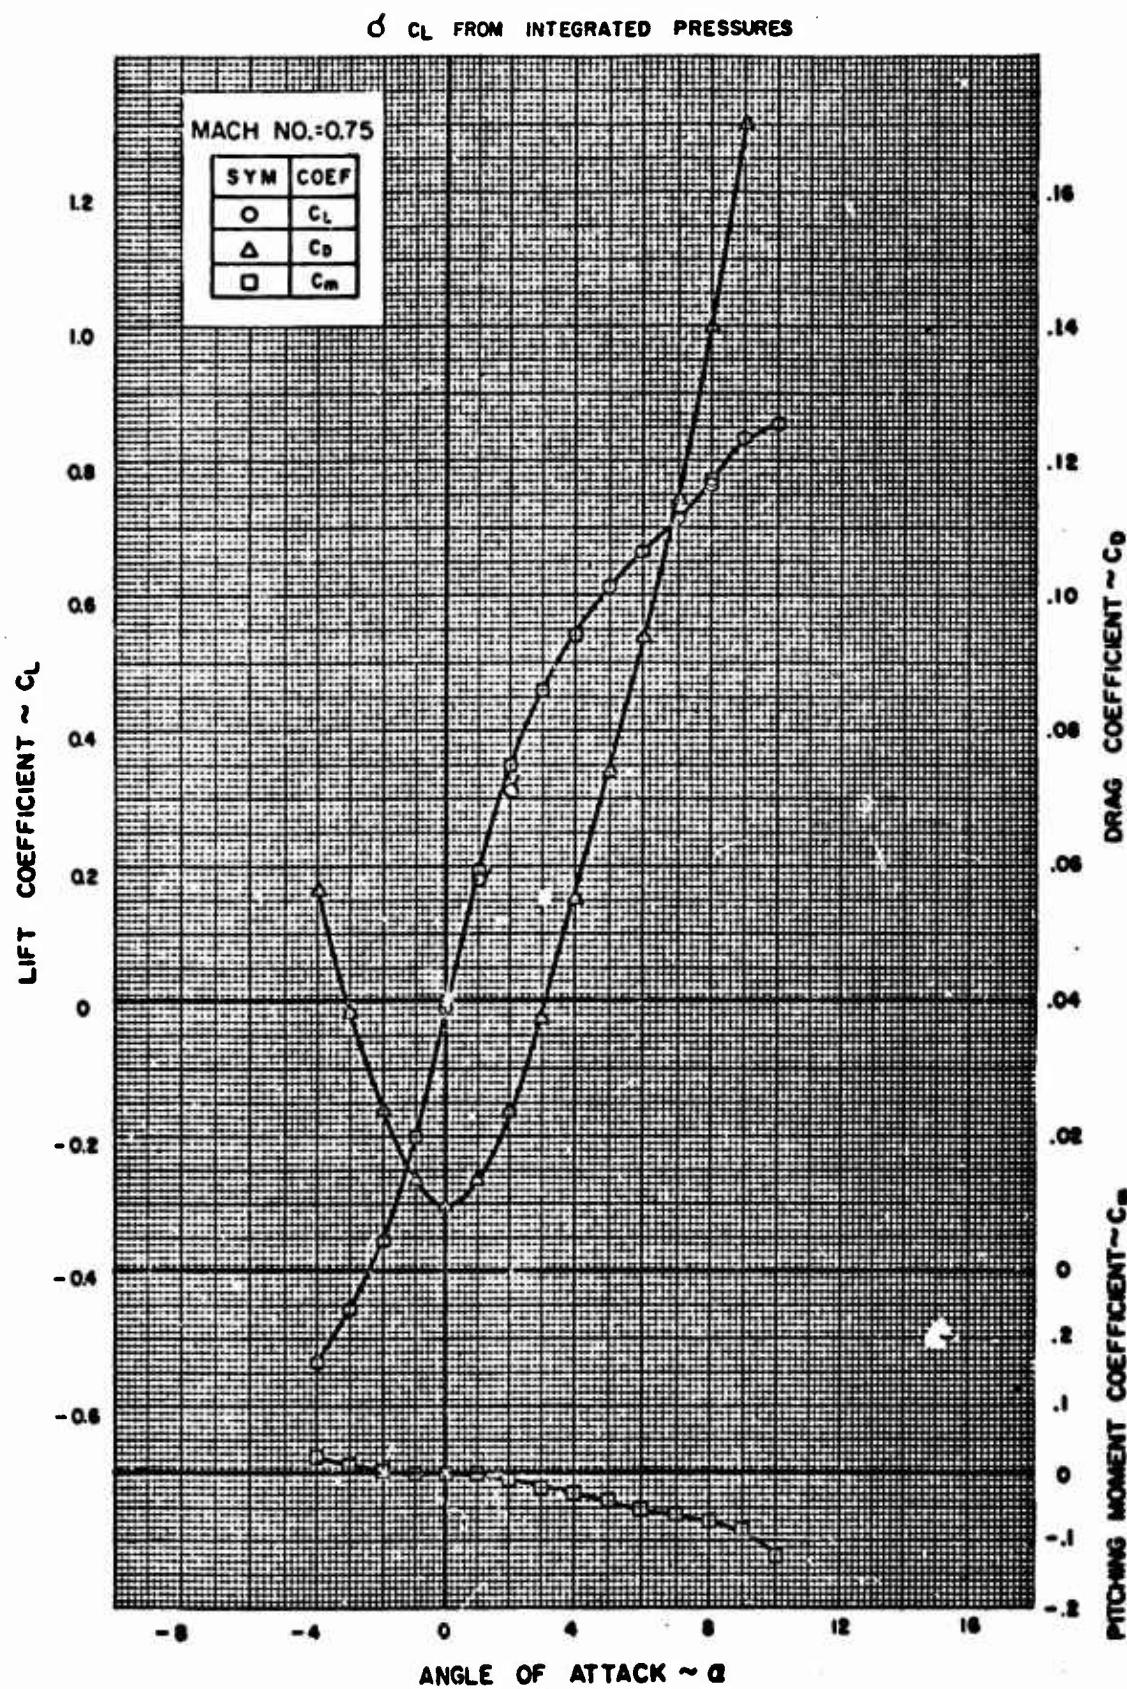


FIGURE 39. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

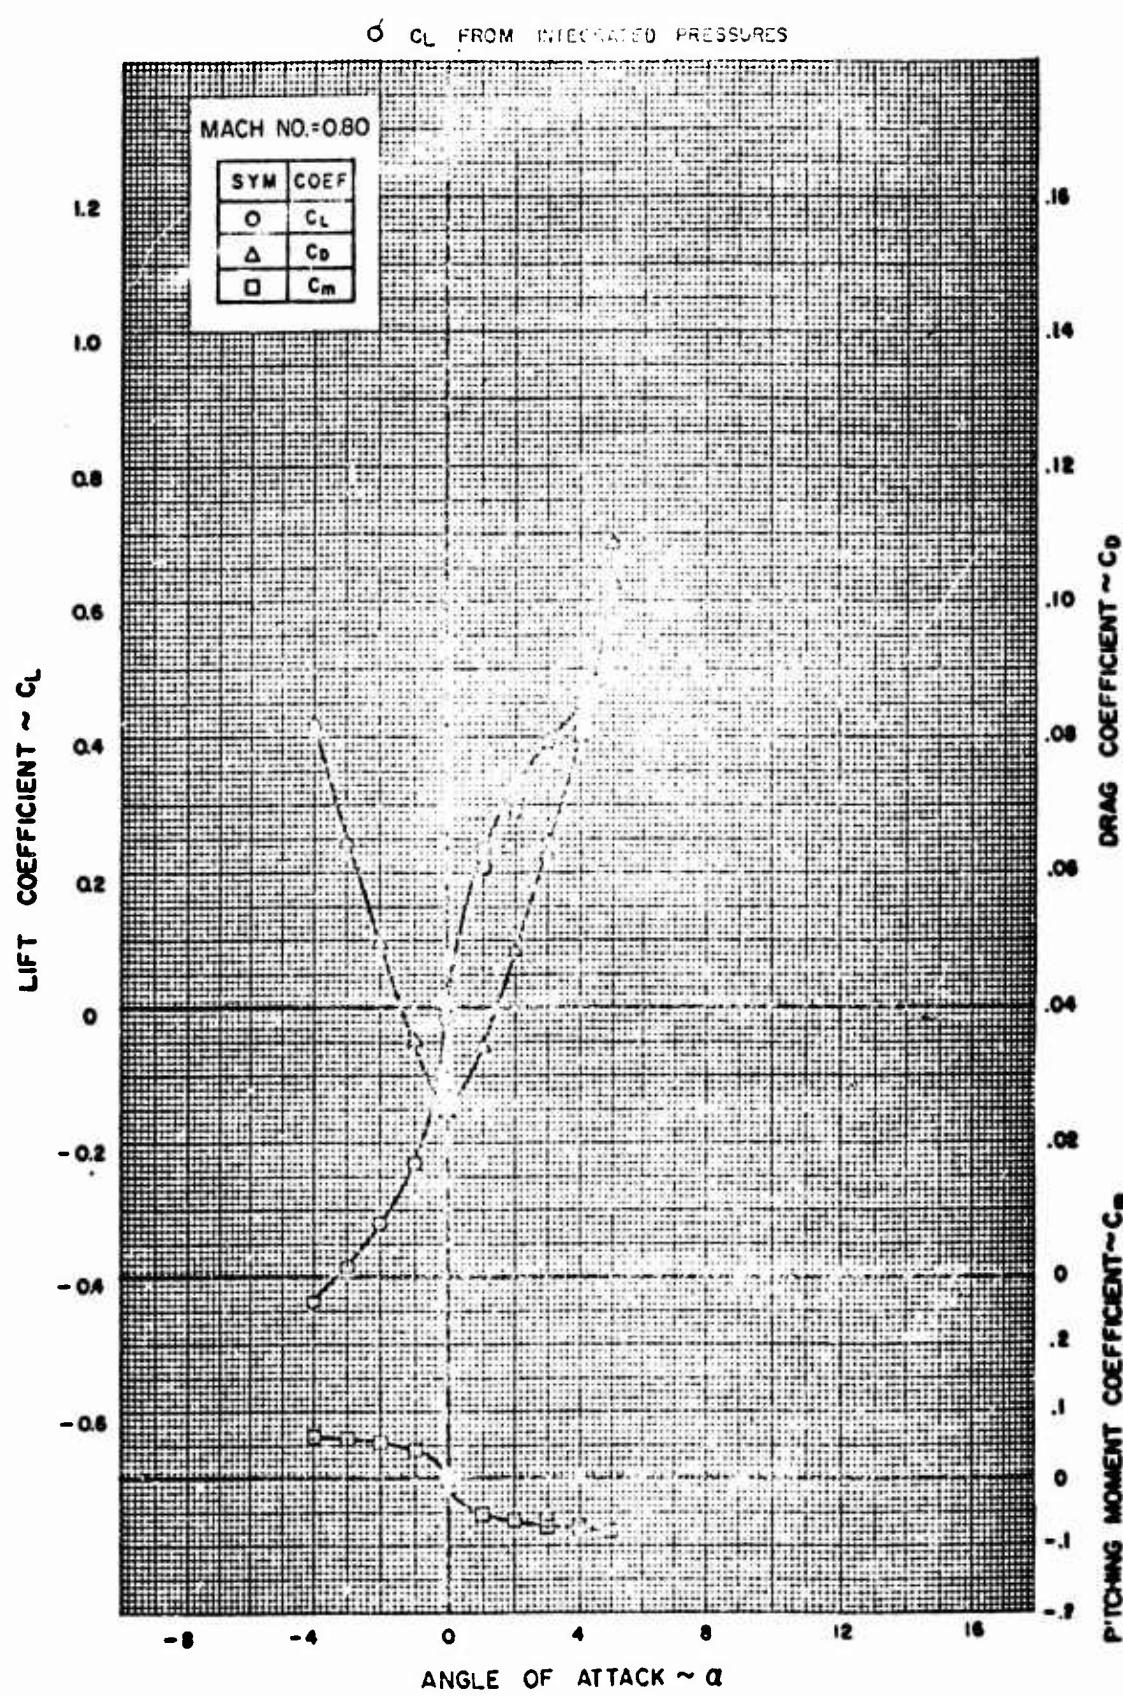


FIGURE 4Q. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

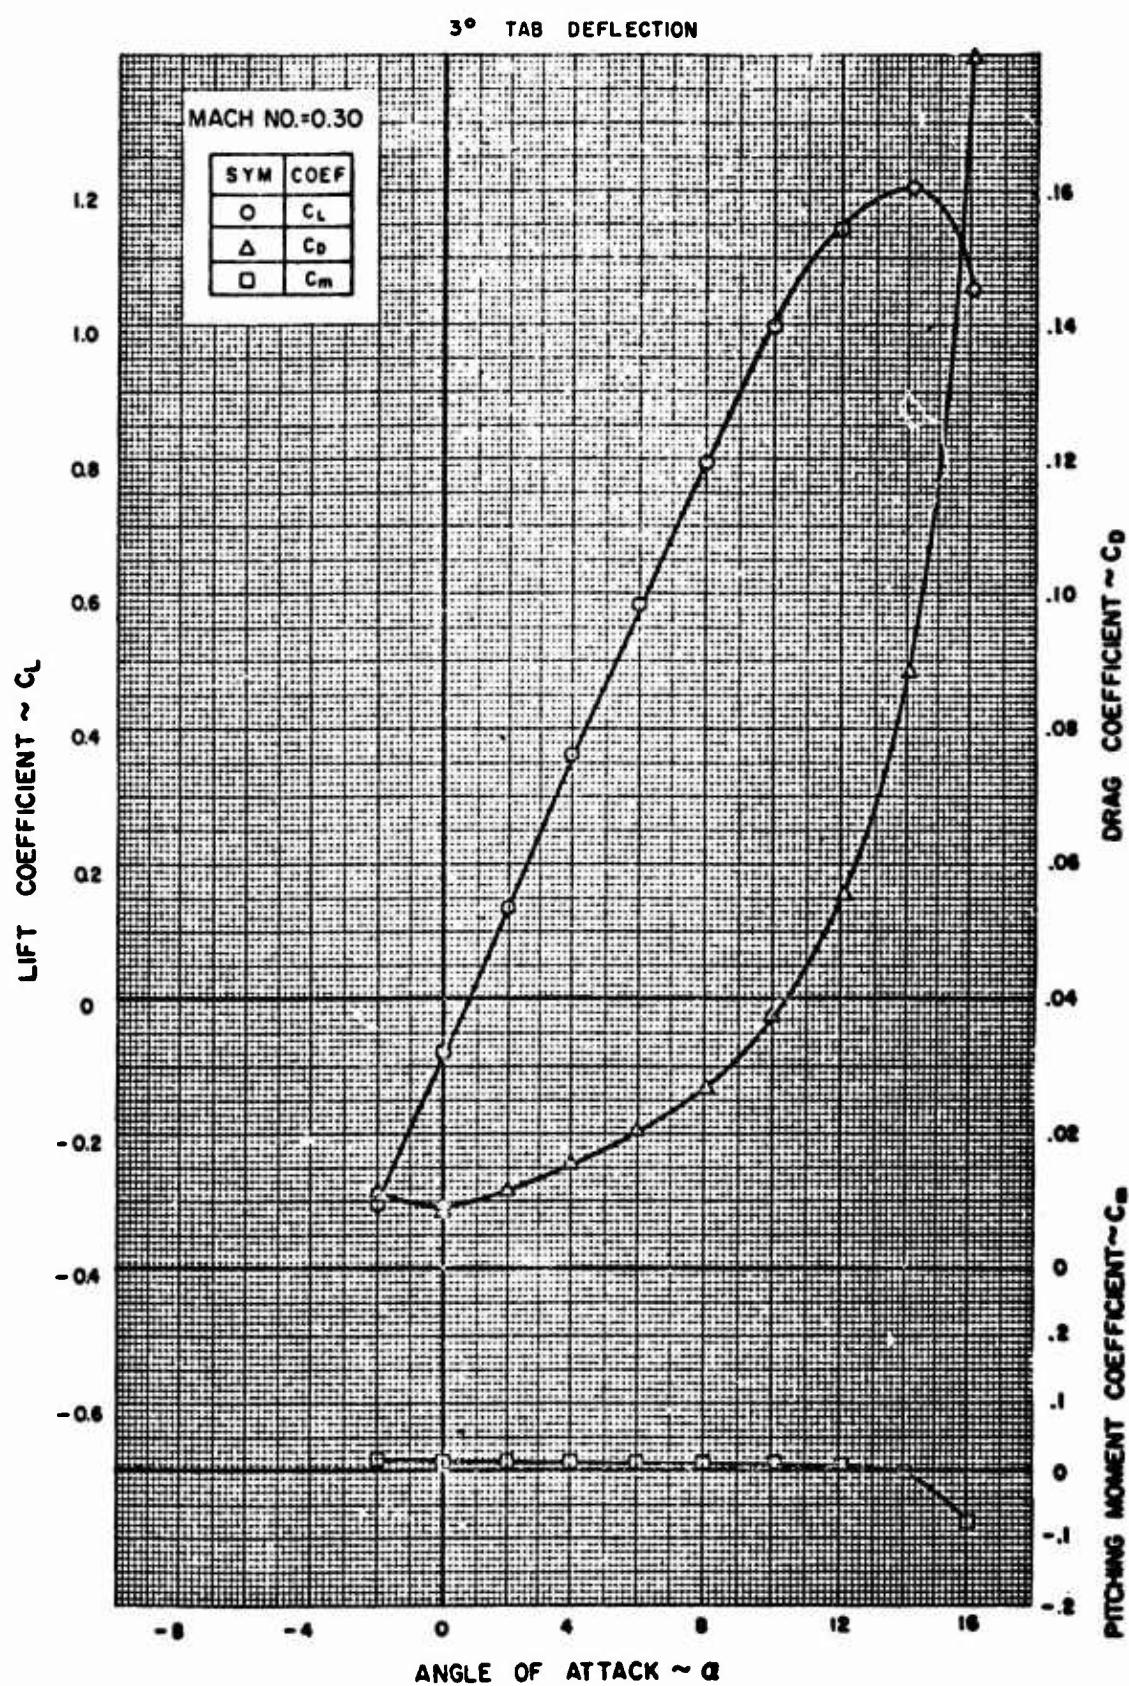


FIGURE 41. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

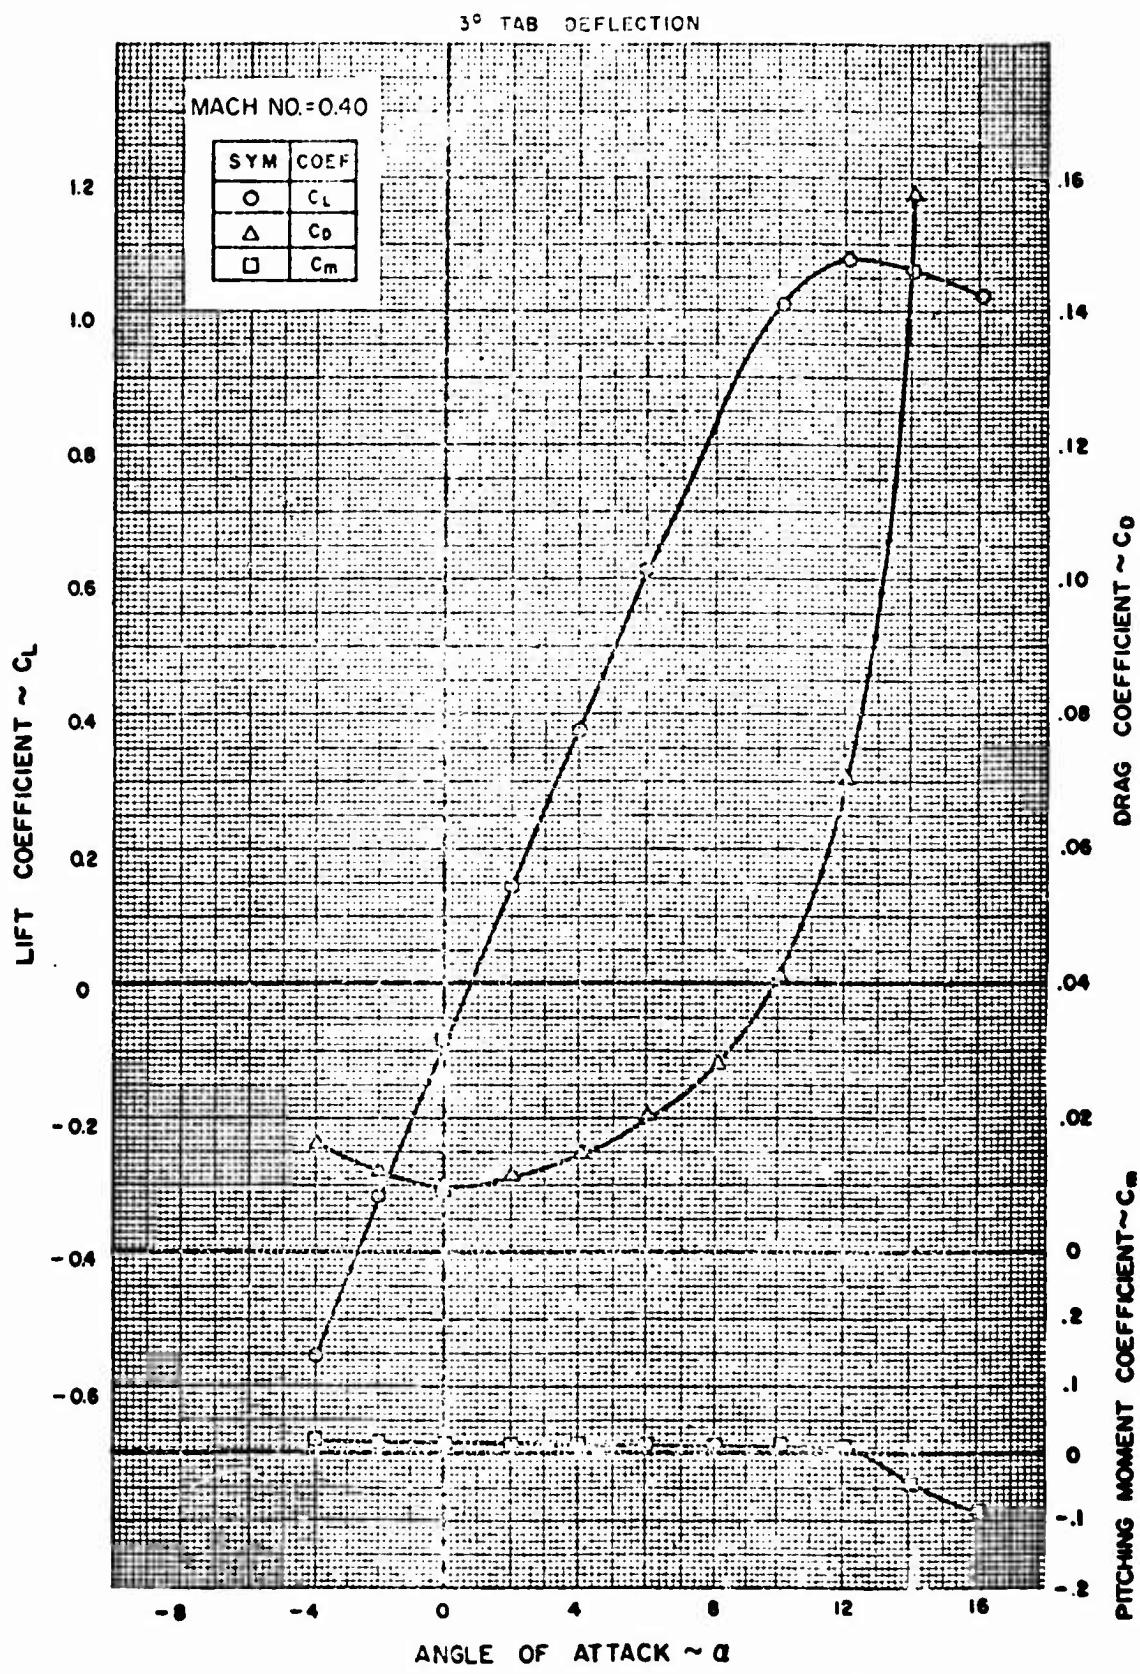


FIGURE 42. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

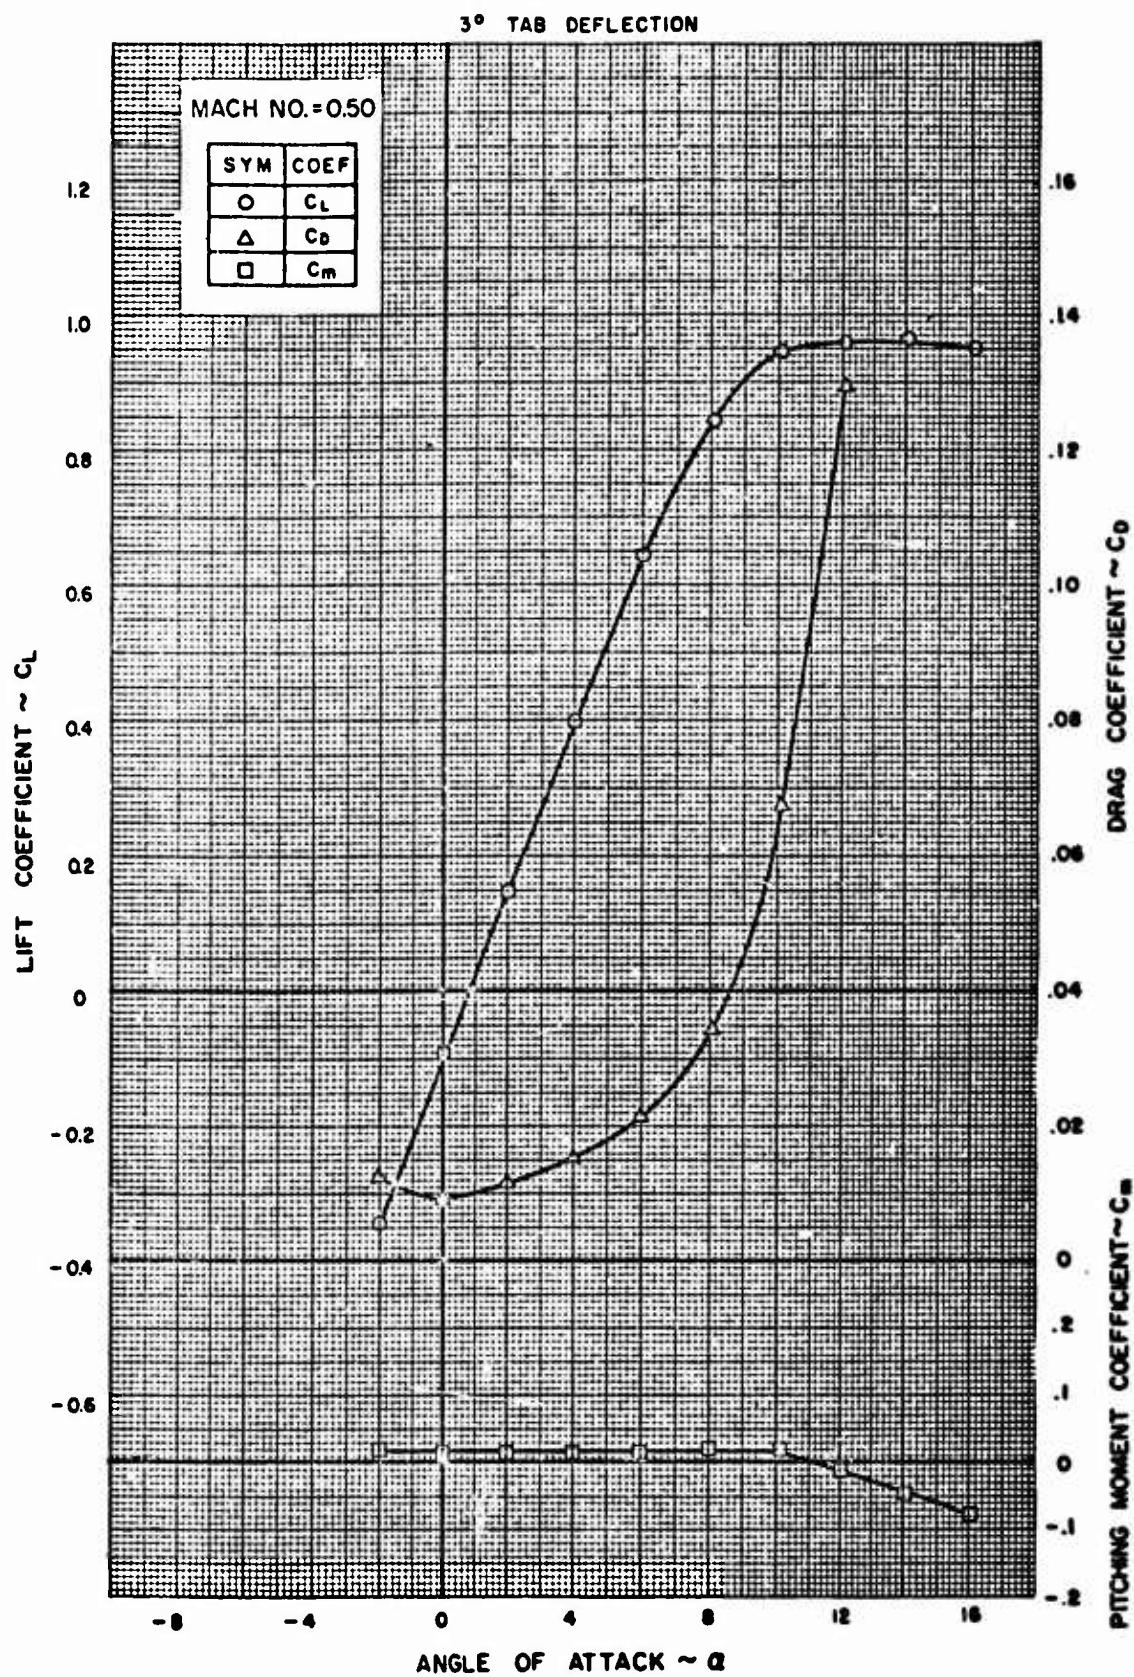


FIGURE 43. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

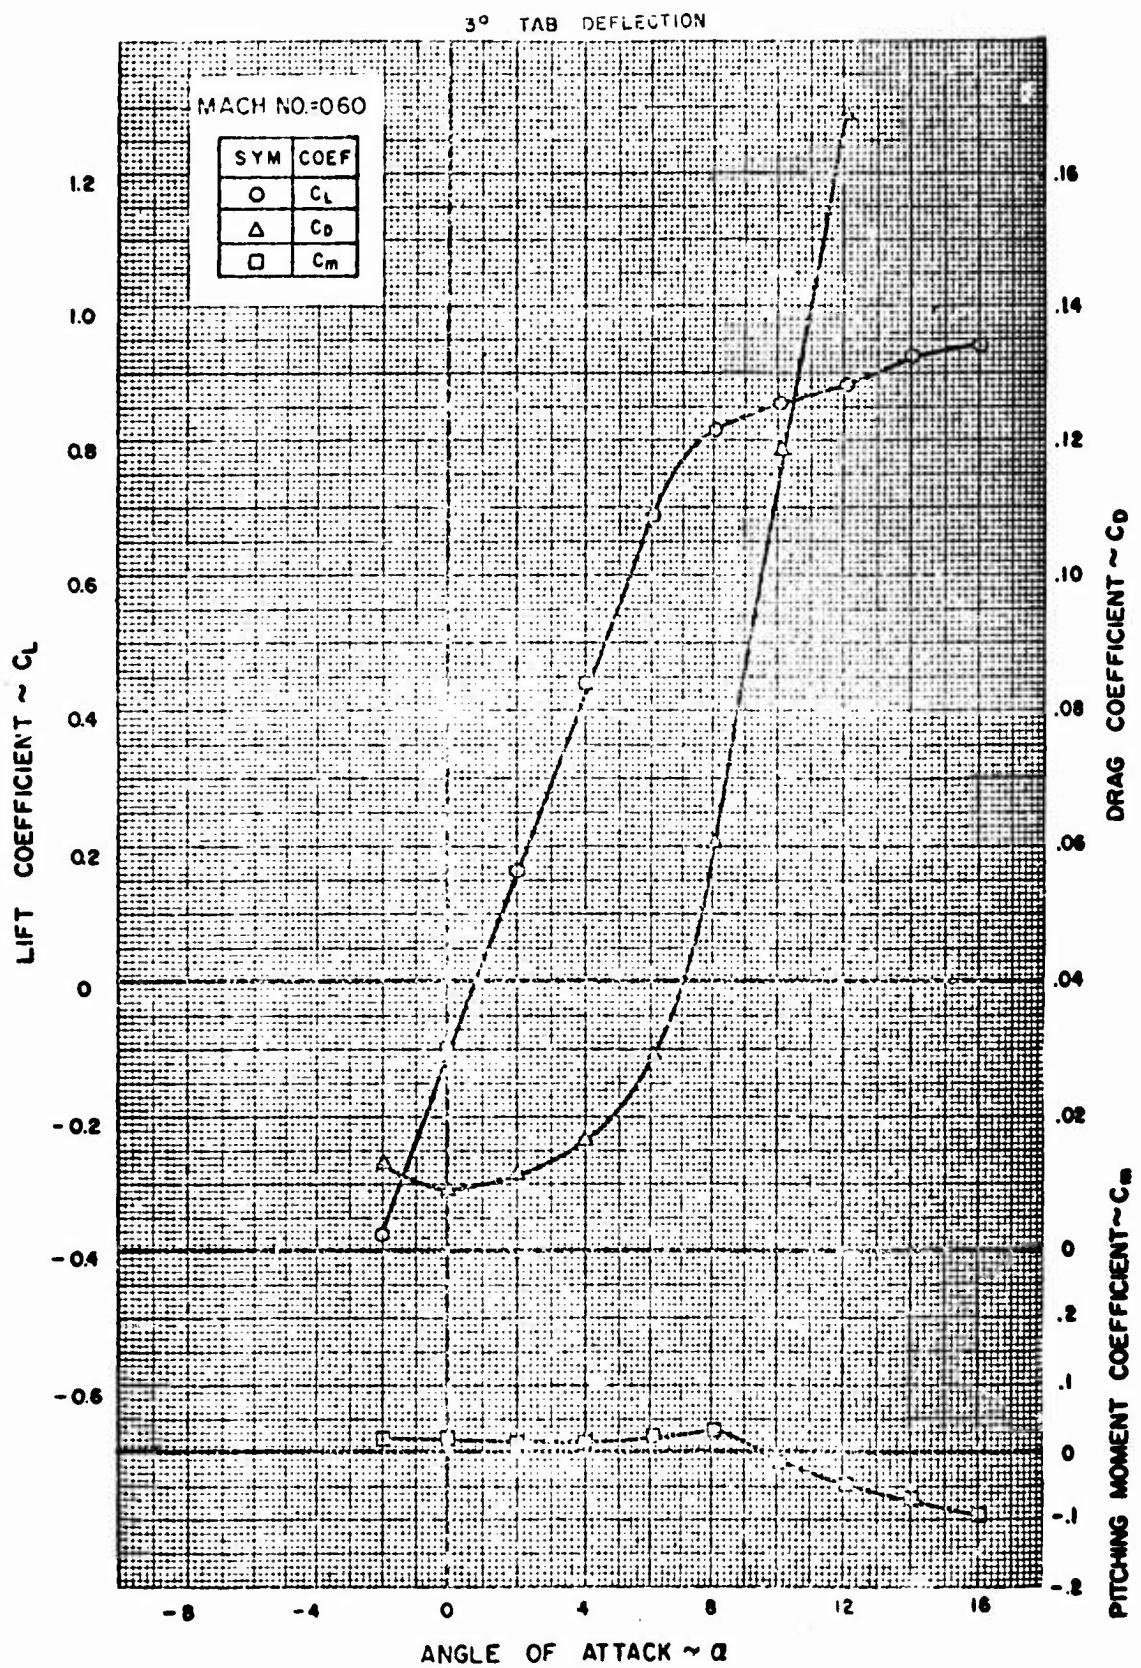


FIGURE 44. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

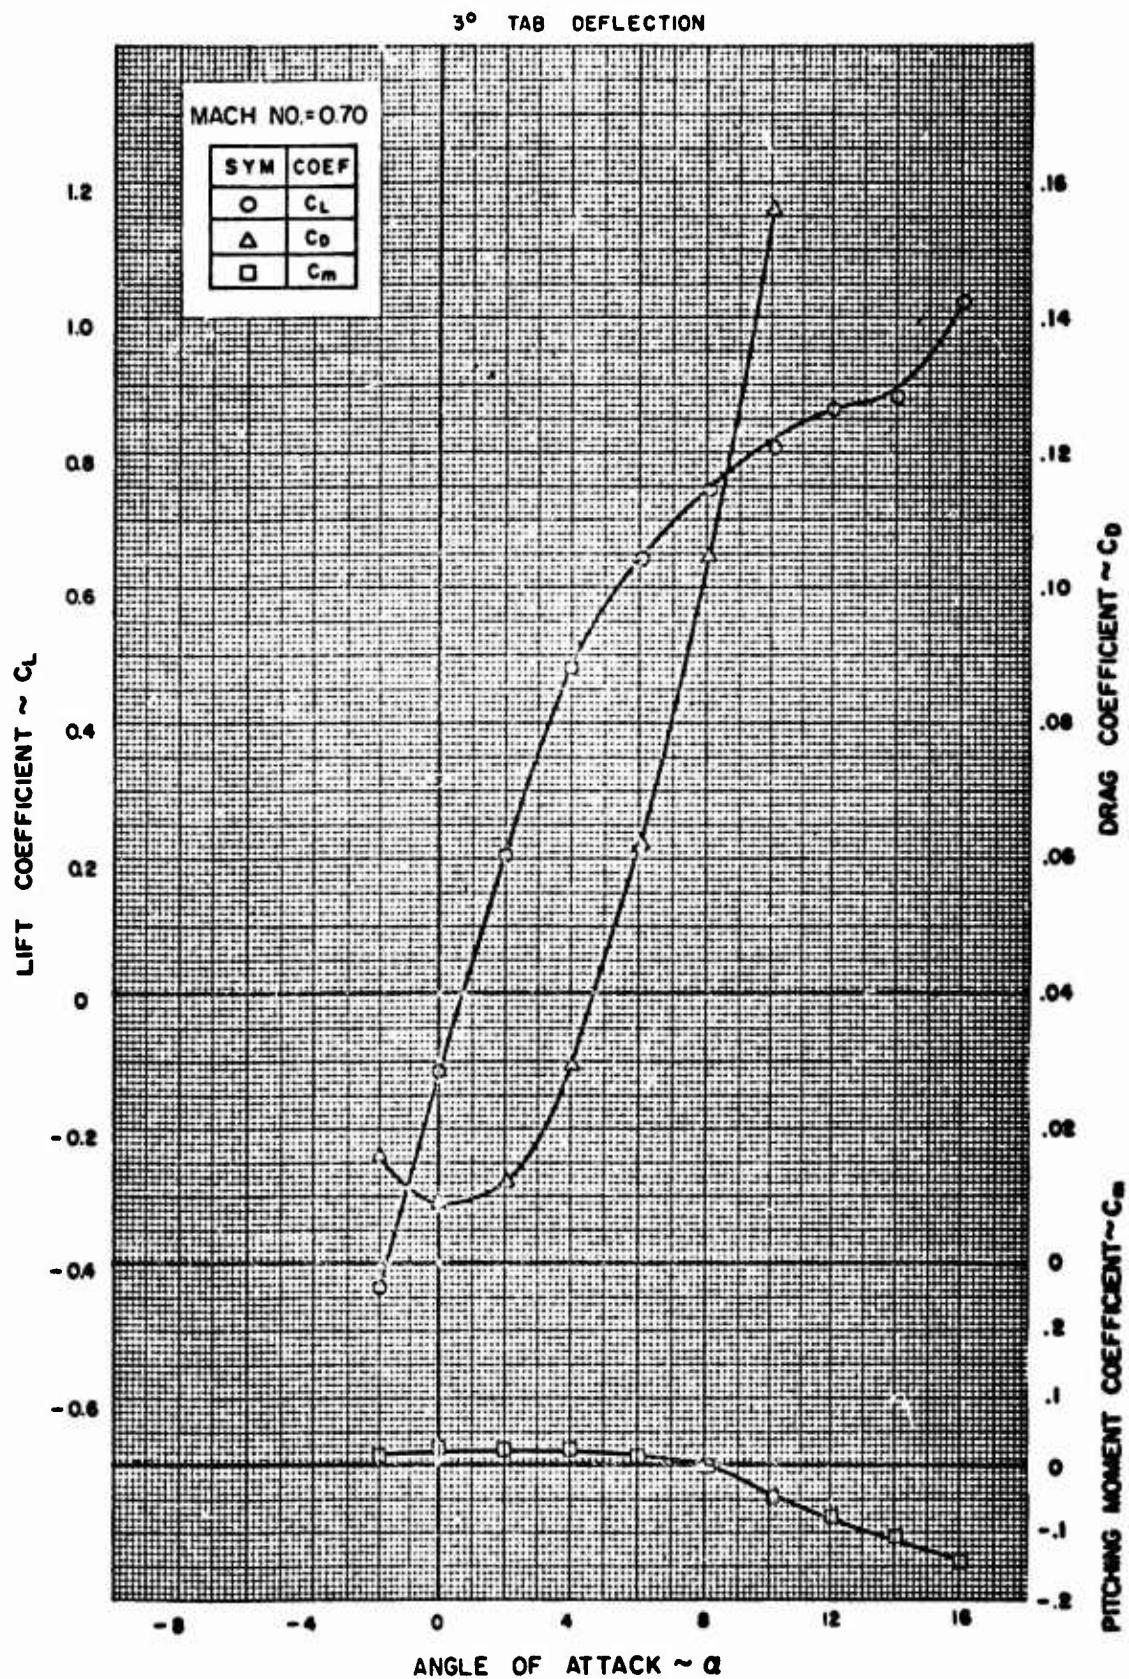


FIGURE 45. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

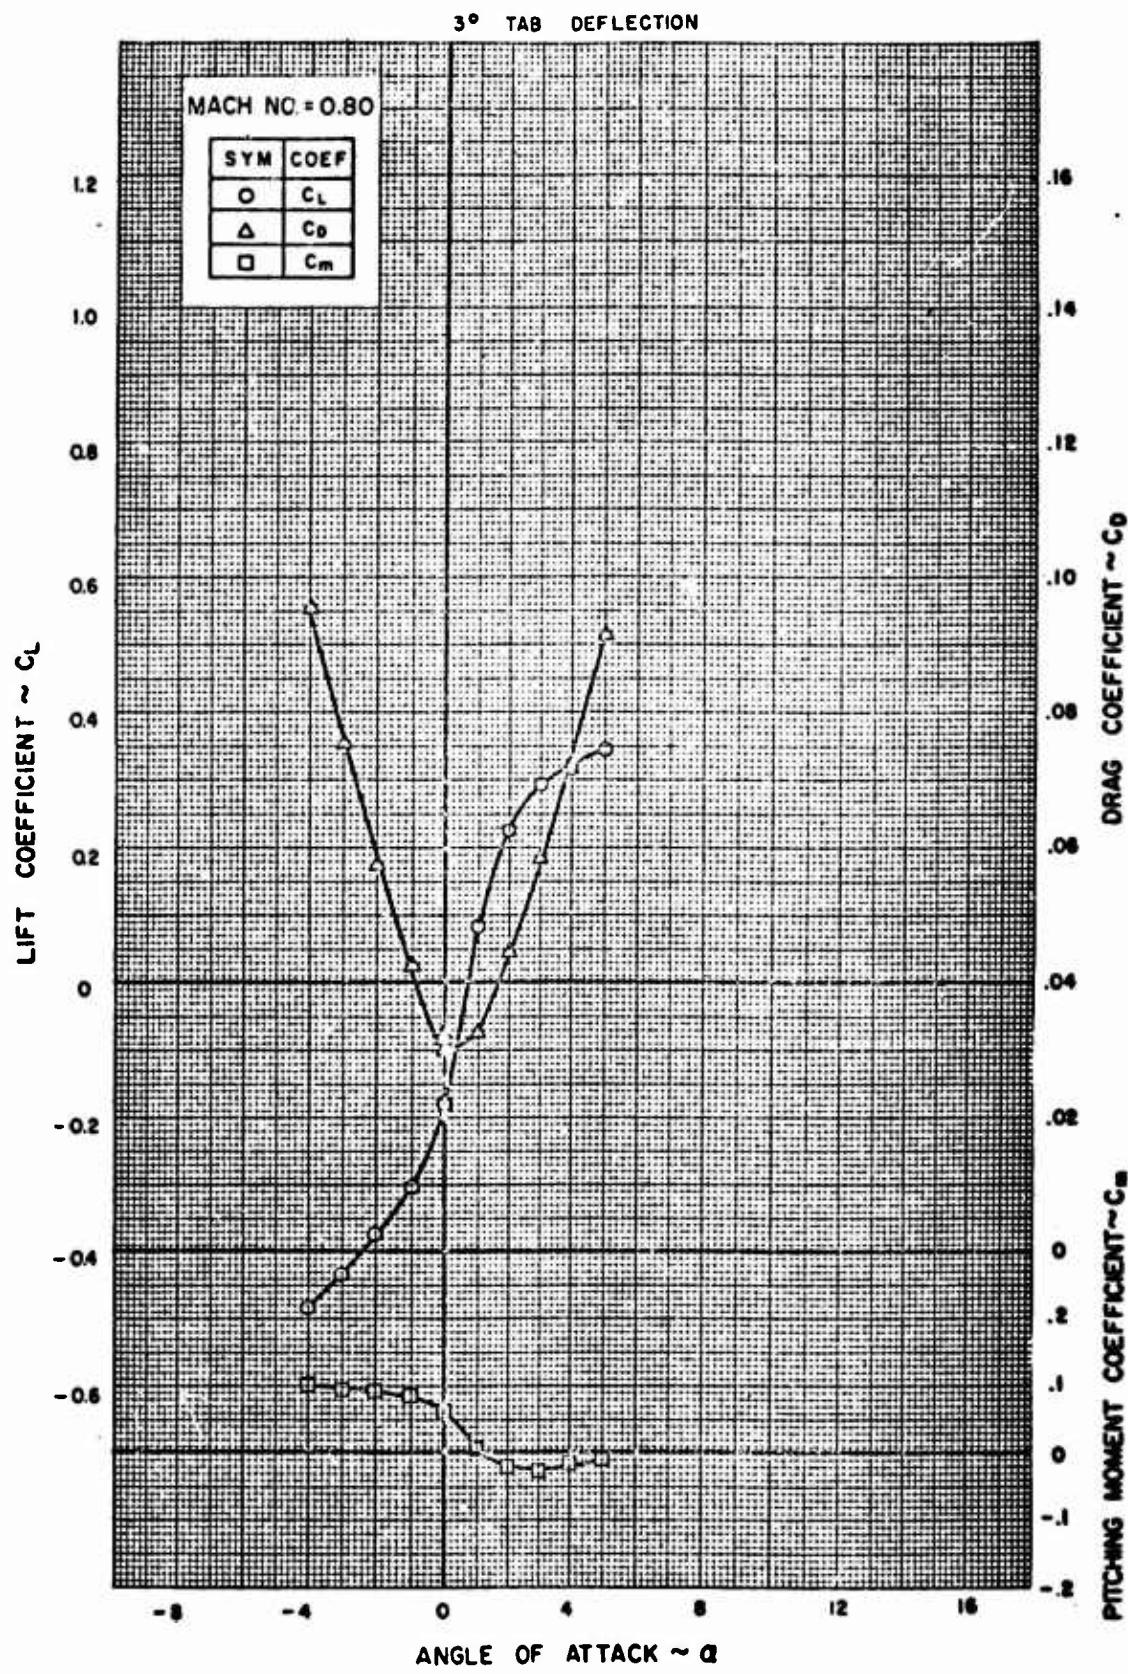


FIGURE 46. VARIATION OF FORCE COEFFICIENTS WITH ANGLE OF ATTACK

APPENDIX I
FORCE AND MOMENT COEFFICIENTS
SUPPLEMENTARY DATA

M	RUN	α	C _L	C _D	C _m
.3	2	16	1.073	.2255	-.102
.3	2	18	.955	.2834	-.113
.3	2	19	.992	.3193	-.117
.3	2	19	.992	.3193	-.117
.3	2	20	.965	.3456	-.120
.3	2	21	.930	.3656	-.118
.3	2	22	.890	.3818	-.116
.3	2	24	.853	.4253	-.131
.3	2	26	.923	.4936	-.170
.3	2	28	1.023	.5846	-.216
.4	3	15	1.095	.2109	-.071
.4	3	16	1.079	.2438	-.097
.4	3	17	1.033	.2757	-.111
.4	3	18	.986	.2978	-.118
.4	3	19	.939	.3095	-.112
.4	3	20	.888	.3292	-.113
.4	3	22	.844	.8617	-.113
.4	3	24	.861	.4189	-.133
.4	3	26	1.003	.5332	-.173
.4	3	28	1.055	.5929	-.190
.5	4	13	1.014	.1674	-.057
.5	4	14	1.017	.2014	-.069
.5	4	15	1.012	.2316	-.084
.5	4	16	.996	.2594	-.095
.5	4	17	.982	.2875	-.106
.5	4	18	.968	.3136	-.118
.5	4	20	.909	.3481	-.119
.5	4	22	.877	.3857	-.129
.5	4	24	.994	.4667	-.171

<u>M</u>	<u>RUN</u>	<u>α</u>	<u>C_L</u>	<u>C_D</u>	<u>C_m</u>
.6	20	12	.950	.1860	-.072
.6	20	13	.982	.2352	-.085
.6	20	14	.998	.2398	-.095
.6	20	15	1.006	.2644	-.103
.6	20	16	.997	.2915	-.115
.65	8	12	.916	.2030	-.091
.65	8	13	.955	.2308	-.103
.65	8	14	.971	.2545	-.107
.65	8	15	1.005	.2824	-.116
.65	8	16	1.011	.3080	-.133
.65	8	17	1.035	.3247	-.138
.65	8	18	1.048	.3359	-.145
.65	8	19	1.052	.3492	-.156
.65	8	20	1.051	.3588	-.163
.7	9	11	.907	.1934	-.090
.7	9	12	.918	.2180	-.103
.7	9	13	.927	.2434	-.116
.7	9	14	.965	.2633	-.122
.7	9	15	1.019	.2845	-.148
.7	9	16	1.111	.3047	-.167
-3 Degree Tab Deflection					
.4	29	16	1.025	.2386	-.086
.5	25	14	.968	.1945	-.048
.5	25	16	.953	.2575	-.078
.6	26	14	.928	.2218	-.068
.6	26	16	.942	.2802	-.092
.7	27	12	.864	.2087	-.075
.7	27	14	.883	.2583	-.103
.7	27	16	1.024	.3039	-.145

APPENDIX II
TABULATED PRESSURE COEFFICIENTS

Pressure measurements - trailing edge tab not deflected.

<u>Run No.</u>	<u>Nominal Mach No.</u>	<u>Angle of Attack Range, Degrees</u>	<u>Page No.</u>	<u>Related Fig. Nos.</u>
2	0.30	-4 to 26	58	5, 6
3	0.40	-4 to 28	61	7, 8
4	0.50	-4 to 24	64	9, 10
20	0.60	-4 to 16	68	11, 12
8	0.65	-4 to 20	70	13, 14
9	0.70	-4 to 16	74	15, 16
18	0.75	-4 to 10	77	17, 18
19	0.80	-4 to 5	80	19, 20

Pressure measurements - trailing edge tab deflected.

<u>Run No.</u>	<u>Nominal Mach No.</u>	<u>Angle of Attack Range, Degrees</u>	<u>Page No.</u>	<u>Related Fig. Nos.</u>
30	0.30	-2 to 16	83	21, 22
29	0.40	-4 to 16	84	23, 24
25	0.50	-2 to 16	86	25, 26
26	0.60	-2 to 16	88	27, 28
27	0.70	-2 to 16	90	29, 30
28	0.80	-4 to 5	91	31, 32

S-50 AIRFOIL - TABULATION OF PRESSURE COEFFICIENT. S

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	2	8	RUN	2	9	RUN	2	10	RUN	2	11	RUN	2	12	RUN	2	13	RUN	2	14
	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	
AU	8.0	AU	10.0	AU	11.0	AU	12.0	AU	13.0	AU	14.0	AU	15.0	AU	16.0	AU	17.0	AU	18.0	AU	19.0
M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	M	0.302										
A	8.05	A	10.06	A	11.07	A	12.07	A	13.07	A	14.07	A	15.08	A	16.07	A	17.07	A	18.07	A	19.07
Q0	126.1	Q0	126.1	Q0	126.1	Q0	126.1	Q0	126.1	Q0	126.9										
P0	1988.0	P0	1988.0	P0	1988.0	P0	1988.0	P0	1988.0	P0	1987.2										
TAP X/C	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP								
1	.000	-1.419	-2.752	-3.392	-3.966	-4.406	-4.434	-5.352													
2	.008	U	-3.567	-4.907	-5.584	-6.160	-6.627	-6.660	-8.134												
3	.017	U	-3.185	-4.342	-5.056	-5.656	-6.137	-6.174	-5.598												
4	.040	U	-2.410	-2.999	-3.299	-3.551	-3.659	-3.715	-3.993												
5	.065	U	-1.979	-2.327	-2.557	-2.743	-2.768	-2.836	-2.987												
6	.090	U	-1.713	-1.974	-2.155	-2.306	-2.321	-2.382	-2.478												
7	.130	U	-1.363	-1.490	-1.682	-1.805	-1.775	-1.862	-1.941												
8	.168	U	-1.179	-1.313	-1.441	-1.526	-1.473	-1.574	-1.597												
9	.233	U	-0.981	-1.027	-1.138	-1.244	-1.163	-1.289	-1.249												
10	.335	U	-0.715	-0.716	-0.802	-0.895	-0.796	-0.906	-0.867												
11	.500	U	-0.468	-0.416	-0.467	-0.539	-0.452	-0.537	-0.520												
12	.625	U	-0.302	-0.208	-0.270	-0.346	-0.259	-0.355	-0.303												
13	.769	U	-0.143	-0.025	-0.108	-0.177	-0.049	-0.194	-0.146												
14	.915	U	0.078	0.175	0.098	-0.003	0.126	0.011	-0.004												
15	.960	U	0.134	0.192	0.115	0.042	0.163	0.035	0.009												
16	.008	L	0.998	0.973	0.776	0.621	0.636	0.482	0.297												
17	.017	L	0.991	0.959	0.992	0.917	0.970	0.938	0.956												
18	.040	L	0.778	0.977	0.955	0.913	0.952	0.928	0.992												
19	.065	L	0.637	0.688	0.860	0.810	0.843	0.825	0.882												
20	.090	L	0.484	0.732	0.718	0.673	0.723	0.702	0.790												
21	.130	L	0.374	0.601	0.601	0.552	0.623	0.599	0.684												
22	.168	L	0.307	0.526	0.527	0.460	0.500	0.487	0.568												
23	.233	L	0.207	0.392	0.402	0.333	0.390	0.345	0.459												
24	.335	L	0.193	0.356	0.377	0.297	0.322	0.295	0.370												
25	.500	L	0.168	0.302	0.313	0.173	0.206	0.203	0.261												
26	.625	L	0.100	0.217	0.225	0.074	0.110	0.087	0.134												
27	.769	L	0.171	0.285	0.271	0.124	0.146	0.127	0.156												
28	.915	L	0.204	0.300	0.286	0.139	0.147	0.107	0.150												
29	.960	L	0.311	0.410	0.400	0.270	0.219	0.199	0.218												

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	2	15	RUN	2	16	RUN	2	17	RUN	2	18	RUN	2	19	RUN	2	20	RUN	2	21	
	MU	0.30	MU	0.30																		
AU	16.0	AU	17.0	AU	18.0	AU	19.0	AU	20.0	AU	21.0	AU	22.0	AU	23.0	AU	24.0	AU	25.0	AU	26.0	
M	0.304	M	0.304	M	0.305	M	0.306	M	0.306	M	0.306	M	0.307									
A	16.04	A	17.04	A	18.03	A	19.03	A	20.03	A	21.03	A	22.03	A	23.03	A	24.03	A	25.03	A	26.03	
Q0	128.4	Q0	128.4	Q0	129.2	Q0	130.0															
P0	1985.6	P0	1985.6	P0	1984.7	P0	1983.9															
TAP	X/C	CP																				
1	0.000	-0.878	-0.794	-0.817	-0.896	-0.917	-0.984	-1.009	-1.009	-0.984	-0.984	-0.984	-0.984	-0.984	-0.984	-0.984	-0.984	-0.984	-0.984	-0.984		
2	0.008	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	0.233	
3	0.017	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	0.623	
4	0.040	0.709	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	0.636	
5	0.065	0.705	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	0.646	
6	0.090	0.712	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	0.653	
7	0.130	0.722	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	0.666	
8	0.168	0.777	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	0.649	
9	0.233	0.776	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	0.676	
10	0.335	0.739	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	0.697	
11	0.500	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	0.721	
12	0.625	0.731	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	0.742	
13	0.769	0.691	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	0.739	
14	0.915	0.543	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	0.626	
15	0.960	0.489	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	0.592	
16	0.008	0.888	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	0.850	
17	0.017	0.984	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	0.981	
18	0.040	0.995	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	0.953	
19	0.065	0.849	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	0.807	
20	0.090	0.755	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	0.703	
21	0.130	0.605	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	0.543	
22	0.168	0.518	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	0.463	
23	0.233	0.390	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	0.348	
24	0.335	0.282	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	0.230	
25	0.500	0.160	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	0.098	
26	0.625	0.094	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	0.025	
27	0.769	0.029	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	-0.030	
28	0.915	-0.043	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	
29	0.960	0.017	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	-0.063	

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS													
TAP	X/C	RUN 2			RUN 23			RUN 3			RUN 26		
		RUN	MU	AU	RUN	MU	AU	RUN	MU	AU	RUN	MU	AU
1	0.000	-1.004	-1.091	0.973	-1.019	0.901	1.019	0.417	0.400	0.400	3	29	
2	0.008	-0.769	-0.830	0.254	0.289	0.711	0.957	0.299	0.299	0.299	RUN	3	
3	0.017	-0.769	-0.815	-0.086	-0.062	0.194	0.721	-0.031	-0.031	-0.031	28	29	
4	0.040	-0.741	-0.801	-0.348	-0.361	0.020	0.337	-0.355	-0.355	-0.355	M	0.401	
5	0.065	-0.740	-0.790	-0.394	-0.388	-0.116	0.159	-0.390	-0.390	-0.390	A	0.401	
6	0.090	-0.747	-0.807	-0.415	-0.457	-0.214	0.040	-0.438	-0.438	-0.438	Q0	0.401	
7	0.130	-0.740	-0.796	-0.542	-0.434	-0.281	-0.021	-0.378	-0.378	-0.378	P0	0.401	
8	0.168	-0.750	-0.799	-0.394	-0.430	-0.252	-0.082	-0.384	-0.384	-0.384	PO	0.401	
9	0.233	-0.770	-0.819	-0.383	-0.405	-0.273	-0.126	-0.390	-0.390	-0.390	P0	0.401	
10	0.335	-0.790	-0.802	-0.305	-0.321	-0.221	-0.105	-0.298	-0.298	-0.298	PO	0.401	
11	0.500	-0.793	-0.822	-0.231	-0.234	-0.211	-0.122	-0.200	-0.200	-0.200	PO	0.401	
12	0.625	-0.834	-0.843	-0.149	-0.158	-0.157	-0.081	-0.148	-0.148	-0.148	PO	0.401	
13	0.769	-0.824	-0.843	-0.057	-0.046	-0.040	-0.007	-0.037	-0.037	-0.037	PO	0.401	
14	0.915	-0.843	-0.818	0.070	0.063	0.103	0.113	0.094	0.094	0.094	PO	0.401	
15	0.960	-0.864	-0.815	0.162	0.180	0.178	0.199	0.197	0.197	0.197	PO	0.401	
16	0.008	0.810	0.721	0.159	0.155	0.509	-1.423	0.140	0.140	0.140	PO	0.401	
17	0.017	0.956	0.970	-0.160	-0.179	-0.806	-1.596	-0.209	-0.209	-0.209	PO	0.401	
18	0.040	0.942	0.950	-0.365	-0.384	-0.847	-1.387	-0.422	-0.422	-0.422	PO	0.401	
19	0.065	0.836	0.851	-0.454	-0.461	-0.934	-1.232	-0.493	-0.493	-0.493	PO	0.401	
20	0.090	0.690	0.767	-0.461	-0.474	-0.792	-1.130	-0.503	-0.503	-0.503	PO	0.401	
21	0.130	0.544	0.662	-0.454	-0.480	-0.742	-0.994	-0.497	-0.497	-0.497	PO	0.401	
22	0.168	0.455	0.530	-0.411	-0.428	-0.656	-0.856	-0.445	-0.445	-0.445	PO	0.401	
23	0.233	0.306	0.402	-0.411	-0.424	-0.596	-0.753	-0.424	-0.424	-0.424	PO	0.401	
24	0.335	0.180	0.317	-0.326	-0.338	-0.464	-0.580	-0.334	-0.334	-0.334	PO	0.401	
25	0.500	-0.007	0.108	-0.234	-0.234	-0.326	-0.398	-0.225	-0.225	-0.225	PO	0.401	
26	0.625	-0.119	-0.050	-0.142	-0.169	-0.220	-0.267	-0.188	-0.188	-0.188	PO	0.401	
27	0.769	-0.234	-0.124	-0.036	-0.035	-0.082	-0.117	-0.050	-0.050	-0.050	PO	0.401	
28	0.915	-0.332	-0.271	0.092	0.099	0.071	0.063	0.088	0.088	0.088	PO	0.401	
29	0.960	-0.287	-0.223	0.194	0.203	0.159	0.150	0.193	0.193	0.193	PO	0.401	

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

TAP	X/C	RUN 3										RUN 3									
		30	31	32	33	34	35	36	30	31	32	33	34	35	36	30	31	32	33	34	35
MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU													
AU	2.0	AU	4.0	AU	6.0	AU	8.0	AU	10.0	AU	11.0	AU	12.0								
M	0.401	M	0.401	M	0.401	M	0.402														
A	2.01	A	4.03	A	6.04	A	8.06	A	10.07	A	11.07	A	12.07								
OO	213.3	OO	213.3	OO	213.3	OO	214.2	OO	214.2	OO	214.2	OO	215.2								
PO	1895.0	PO	1895.0	PO	1895.0	PO	1894.0	PO	1892.0												
CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP
1	0.000	0.969	0.561	-0.201	-1.145	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040	-2.040
2	0.008	U	-0.344	-1.226	-2.441	-3.653	-5.153	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625	-5.625
3	0.017	U	-0.647	-1.397	-2.353	-3.475	-4.849	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311	-5.311
4	0.040	U	-0.839	-1.374	-2.006	-2.615	-3.025	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363	-3.363
5	0.065	U	-0.753	-1.177	-1.578	-2.098	-2.446	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516	-2.516
6	0.090	U	-0.759	-1.096	-1.427	-1.641	-2.100	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158	-2.158
7	0.130	U	-0.648	-0.889	-1.177	-1.457	-1.654	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721	-1.721
8	0.168	U	-0.592	-0.803	-0.986	-1.277	-1.433	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475	-1.475
9	0.233	U	-0.564	-0.719	-0.838	-1.060	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170	-1.170
10	0.335	U	-0.431	-0.523	-0.598	-0.766	-0.827	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847	-0.847
11	0.500	U	-0.301	-0.343	-0.358	-0.490	-0.520	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522	-0.522
12	0.625	U	-0.195	-0.251	-0.222	-0.353	-0.344	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338	-0.338
13	0.769	U	-0.090	-0.103	-0.062	-0.162	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151	-0.151
14	0.915	U	0.087	0.082	0.127	0.055	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034	0.034
15	0.960	U	0.160	0.154	0.201	0.109	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038	0.038
16	0.008	L	0.610	0.918	0.984	0.991	0.903	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852	0.852
17	0.017	L	0.289	0.652	0.890	0.985	0.985	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982	0.982
18	0.040	L	-0.033	0.322	0.581	0.757	0.880	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910	0.910
19	0.065	L	-0.167	0.134	0.387	0.575	0.723	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755	0.755
20	0.090	L	-0.223	0.042	0.269	0.439	0.594	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638	0.638
21	0.130	L	-0.263	-0.034	0.146	0.309	0.462	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511	0.511
22	0.168	L	-0.261	-0.074	0.112	0.248	0.374	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433	0.433
23	0.233	L	-0.295	-0.128	0.020	0.140	0.265	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304	0.304
24	0.335	L	-0.224	-0.103	0.005	0.101	0.206	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237	0.237
25	0.500	L	-0.168	-0.078	-0.004	0.063	0.133	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161	0.161
26	0.625	L	-0.138	-0.080	-0.020	0.041	0.077	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090
27	0.769	L	-0.030	0.121	0.055	0.083	0.127	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145	0.145
28	0.915	L	0.090	0.121	0.125	0.153	0.156	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167
29	0.960	L	0.201	0.224	0.232	0.241	0.265	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285	0.285

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

TAP X/C	RUN	RUN 3														
		37	38	39	40	41	42	MU	AU	MU	AU	MU	AU	MU	AU	MU
MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU
AU	13.0	AU	14.0	AU	15.0	AU	16.0	AU	17.0	AU	18.0	AU	19.0	AU	19.0	AU
M	0.404	M	0.405	M	0.406	M	0.407	M	0.408	M	0.408	M	0.408	M	0.408	M
A	13.06	A	14.06	A	15.05	A	16.05	A	17.04	A	18.03	A	19.03	A	19.03	A
Q0	216.2	Q0	217.1	Q0	218.1	Q0	219.0	Q0	219.0	Q0	220.0	Q0	220.0	Q0	220.0	Q0
P0	1891.9	P0	1890.8	P0	1889.8	P0	1888.8	P0	1888.8	P0	1887.7	P0	1887.7	P0	1887.7	P0
CP		CP		CP		CP		CP		CP		CP		CP		
1	1.000	-1.912	-1.848	-1.749	-1.268	-1.018	-0.964	-0.805	-0.701	-1.011	-0.854	-0.700	-0.647	-0.711	-0.634	-0.644
2	0.008	U	2.953	-2.645	-1.680	-1.173	-1.011	-0.701	-0.700	-0.854	-0.740	-0.740	-0.740	-0.711	-0.711	-0.711
3	0.017	U	-2.452	-2.679	-2.384	-1.488	-0.942	-0.854	-0.700	-1.011	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
4	0.040	U	-2.137	-1.811	-1.678	-1.087	-0.942	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
5	0.065	U	-2.014	-1.529	-1.448	-0.919	-0.919	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
6	0.090	U	-1.892	-1.366	-1.292	-0.876	-0.876	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
7	0.130	U	-1.733	-1.310	-1.106	-0.900	-0.900	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
8	0.168	U	-1.518	-1.102	-1.050	-0.810	-0.810	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
9	0.233	U	-1.280	-0.980	-0.968	-0.810	-0.810	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
10	0.335	U	-0.976	-0.861	-0.870	-0.816	-0.816	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
11	0.500	U	-0.664	-0.712	-0.773	-0.811	-0.805	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
12	0.625	U	-0.507	-0.628	-0.702	-0.777	-0.823	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
13	0.769	U	-0.362	-0.504	-0.591	-0.696	-0.800	-0.854	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
14	0.915	U	-0.254	-0.393	-0.488	-0.562	-0.686	-0.764	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
15	0.960	U	-0.230	-0.361	-0.426	-0.522	-0.650	-0.666	-0.700	-0.854	-0.785	-0.785	-0.785	-0.728	-0.728	-0.728
16	0.008	L	0.810	0.846	0.847	0.871	0.890	0.904	0.923	0.823	0.809	0.809	0.809	0.746	0.746	0.746
17	0.017	L	0.988	0.983	0.986	0.990	0.991	0.998	0.979	0.795	0.795	0.795	0.795	0.753	0.753	0.753
18	0.040	L	0.894	0.924	0.925	0.911	0.909	0.920	0.930	0.800	0.798	0.798	0.798	0.716	0.716	0.716
19	0.065	L	0.745	0.792	0.797	0.790	0.769	0.790	0.790	0.650	0.666	0.666	0.666	0.692	0.692	0.692
20	0.090	L	0.625	0.655	0.664	0.659	0.667	0.670	0.670	0.520	0.534	0.534	0.534	0.547	0.547	0.547
21	0.130	L	0.484	0.517	0.522	0.528	0.520	0.520	0.520	0.424	0.442	0.442	0.442	0.464	0.464	0.464
22	0.168	L	0.390	0.430	0.446	0.426	0.424	0.424	0.424	0.300	0.306	0.306	0.306	0.330	0.330	0.330
23	0.233	L	0.295	0.304	0.315	0.297	0.300	0.300	0.300	0.195	0.186	0.186	0.186	0.198	0.198	0.198
24	0.335	L	0.189	0.205	0.206	0.195	0.195	0.195	0.195	0.074	0.074	0.074	0.074	0.060	0.060	0.060
25	0.500	L	0.091	0.101	0.101	0.093	0.093	0.093	0.093	0.027	0.027	0.027	0.027	0.029	0.029	0.029
26	0.625	L	0.045	0.060	0.060	0.017	0.017	0.017	0.017	0.020	0.020	0.020	0.020	0.101	0.101	0.101
27	0.769	L	0.036	0.024	0.001	-0.033	-0.033	-0.033	-0.033	-0.078	-0.078	-0.078	-0.078	-0.155	-0.155	-0.155
28	0.915	L	0.031	0.006	0.006	-0.026	-0.026	-0.026	-0.026	-0.041	-0.041	-0.041	-0.041	-0.115	-0.115	-0.115
29	0.960	L	0.129	0.071	0.028	0.028	0.028	0.028	0.028	0.028	0.028	0.028	0.028	0.028	0.028	0.028

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	3	44	RUN	3	45	RUN	3	46	RUN	3	47	RUN	3	48	RUN	3	49	RUN	4	50
	MU	0.40	MU	0.50																	
	AU	20.0	AU	22.0	AU	24.0	AU	26.0	AU	28.0	AU	30.0	AU	32.0	AU	34.0	AU	36.0	AU	38.0	
M	0.409	M	0.410	M	0.411	M	0.414	M	0.416	M	0.418	M	0.421	M	0.423	M	0.425	M	0.428	M	0.431
A	20.03	A	22.03	A	24.02	A	26.02	A	28.02	A	30.02	A	32.02	A	34.02	A	36.02	A	38.02	A	40.02
QO	220.9	QO	221.9	QO	222.8	QO	225.7	QO	227.7	QO	230.7	QO	233.7	QO	236.7	QO	239.7	QO	242.7	QO	245.7
PO	1886.7	PO	1885.6	PO	1884.6	PO	1881.4	PO	1879.3	PO	1879.0	PO	1875.0	PO	1873.5	PO	1873.0	PO	1872.5	PO	1872.0
TAP	X/C	CP																			
1	0.00	-1.247	-0.879	-0.966	-1.216	-1.329	-1.032	-1.052	-1.291	-0.955	-0.905	-0.955	-0.955	-0.955	-0.955	-0.955	-0.955	-0.955	-0.955	-0.955	
2	0.008	-1.149	-0.654	-0.738	-0.905	-0.905	-0.291	-0.329	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	
3	0.017	-1.100	-0.702	-0.763	-0.900	-0.900	-0.054	-0.014	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	-0.900	
4	0.040	-0.972	-0.626	-0.708	-0.883	-0.929	-0.388	-0.372	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	-0.883	
5	0.065	-0.985	-0.618	-0.702	-0.863	-0.934	-0.417	-0.411	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	-0.863	
6	0.090	-0.989	-0.626	-0.696	-0.875	-0.937	-0.463	-0.482	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	-0.875	
7	0.130	-0.940	-0.682	-0.701	-0.835	-0.900	-0.486	-0.444	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	-0.835	
8	0.168	-1.013	-0.621	-0.705	-0.866	-0.923	-0.426	-0.428	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	-0.866	
9	0.233	-0.956	-0.647	-0.723	-0.887	-0.946	-0.399	-0.420	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	-0.887	
10	0.335	-0.945	-0.654	-0.732	-0.897	-0.955	-0.333	-0.333	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	-0.897	
11	0.500	-0.774	-0.684	-0.746	-0.905	-0.963	-0.224	-0.224	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	-0.905	
12	0.625	-0.736	-0.703	-0.756	-0.917	-0.969	-0.175	-0.166	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	-0.756	
13	0.769	-0.716	-0.725	-0.773	-0.925	-0.972	-0.056	-0.056	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	-0.773	
14	0.915	-0.698	-0.743	-0.757	-0.694	-0.953	-0.084	-0.084	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	-0.757	
15	0.960	-0.688	-0.746	-0.745	-0.885	-0.948	-0.180	-0.194	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	-0.745	
16	0.008	0.873	0.898	0.863	0.730	0.631	0.188	0.194	0.863	0.863	0.863	0.863	0.863	0.863	0.863	0.863	0.863	0.863	0.863	0.863	
17	0.017	0.983	0.969	0.983	0.991	0.962	-0.165	-0.180	0.969	0.969	0.969	0.969	0.969	0.969	0.969	0.969	0.969	0.969	0.969	0.969	
18	0.040	0.921	0.950	0.963	0.990	0.997	-0.367	-0.394	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	
19	0.065	0.799	0.837	0.868	0.915	0.942	-0.459	-0.485	0.837	0.837	0.837	0.837	0.837	0.837	0.837	0.837	0.837	0.837	0.837	0.837	
20	0.090	0.674	0.724	0.740	0.818	0.869	-0.463	-0.511	0.724	0.724	0.724	0.724	0.724	0.724	0.724	0.724	0.724	0.724	0.724	0.724	
21	0.130	0.538	0.587	0.622	0.703	0.753	-0.476	-0.518	0.538	0.538	0.538	0.538	0.538	0.538	0.538	0.538	0.538	0.538	0.538	0.538	
22	0.168	0.443	0.494	0.528	0.610	0.670	-0.472	-0.472	0.443	0.443	0.443	0.443	0.443	0.443	0.443	0.443	0.443	0.443	0.443	0.443	
23	0.233	0.318	0.367	0.395	0.470	0.543	-0.428	-0.468	0.318	0.318	0.318	0.318	0.318	0.318	0.318	0.318	0.318	0.318	0.318	0.318	
24	0.335	0.200	0.232	0.261	0.320	0.388	-0.344	-0.367	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	0.200	
25	0.500	0.036	0.066	0.083	0.128	0.186	-0.236	-0.259	0.036	0.036	0.036	0.036	0.036	0.036	0.036	0.036	0.036	0.036	0.036	0.036	
26	0.625	-0.055	-0.026	-0.035	-0.000	0.030	-0.146	-0.170	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	-0.055	
27	0.769	-0.129	-0.128	-0.134	-0.119	-0.083	-0.041	-0.049	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	-0.129	
28	0.915	-0.204	-0.227	-0.229	-0.280	-0.271	-0.103	-0.103	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	-0.204	
29	0.960	-0.165	-0.179	-0.188	-0.204	-0.209	-0.103	-0.103	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	-0.165	

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

RUN	X/C	TAP	CP												CP														
			4	58	RUN	4	59	RUN	4	60	RUN	4	61	RUN	4	62	RUN	4	63	RUN	4	64							
MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50		
AU	8.0	AU	9.0	AU	9.0	AU	10.0	AU	11.0	AU	12.0	AU	13.0	AU	13.0	AU	13.0	AU	13.0	AU	13.0	AU	14.0	AU	14.0	AU	14.0		
M	0.502	M	0.503	M	0.503	M	0.504	M	0.505	M	0.506	M	0.507	M	0.507	M	0.507	M	0.508	M	0.508	M	0.508	M	0.508	M	0.508		
A	8.06	A	9.07	A	9.07	A	10.07	A	11.07	A	12.06	A	13.05	A	13.05	A	13.05	A	14.05	A	14.05	A	14.05	A	14.05	A	14.05		
Q0	314.4	Q0	315.4	Q0	316.5	Q0	317.5	Q0	318.6	Q0	319.6	Q0	320.7	Q0	320.7	Q0	320.7	Q0	320.7	Q0	320.7	Q0	320.7	Q0	320.7	Q0	320.7		
P0	1782.3	P0	1781.1	P0	1779.9	P0	1778.7	P0	1777.5	P0	1776.3	P0	1775.1	P0	1774.9	P0	1773.7	P0	1772.5	P0	1771.3	P0	1770.1	P0	1768.9	P0	1767.7		
CP	-0.537	CP	-0.755	CP	-0.895	CP	-0.924	CP	-0.909	CP	-0.854	CP	-0.819	CP	-0.819	CP	-0.819	CP	-0.819	CP	-0.819	CP	-0.819	CP	-0.819	CP	-0.819		
1	0.000	U	-3.097	U	-3.396	U	-3.451	U	-3.060	U	-2.410	U	-1.834	U	-1.495	U	-1.495	U	-1.495	U	-1.495	U	-1.495	U	-1.495	U	-1.495	U	-1.495
2	0.008	U	-3.017	U	-3.463	U	-3.738	U	-3.651	U	-2.726	U	-1.996	U	-1.565	U	-1.389	U	-1.389	U	-1.389	U	-1.389	U	-1.389	U	-1.389	U	-1.389
3	0.040	U	-3.371	U	-3.504	U	-3.537	U	-3.357	U	-2.263	U	-1.704	U	-1.388	U	-1.202	U	-1.202	U	-1.202	U	-1.202	U	-1.202	U	-1.202	U	-1.202
4	0.065	U	-2.944	U	-2.978	U	-2.527	U	-2.119	U	-1.674	U	-1.390	U	-1.390	U	-1.203	U	-1.203	U	-1.203	U	-1.203	U	-1.203	U	-1.203	U	-1.203
5	0.090	U	-1.774	U	-2.268	U	-2.271	U	-2.015	U	-1.454	U	-1.395	U	-1.395	U	-1.207	U	-1.207	U	-1.207	U	-1.207	U	-1.207	U	-1.207	U	-1.207
6	0.130	U	-1.493	U	-1.603	U	-1.786	U	-1.758	U	-1.611	U	-1.382	U	-1.382	U	-1.202	U	-1.202	U	-1.202	U	-1.202	U	-1.202	U	-1.202	U	-1.202
7	0.168	U	-1.295	U	-1.344	U	-1.560	U	-1.533	U	-1.424	U	-1.270	U	-1.270	U	-1.117	U	-1.117	U	-1.117	U	-1.117	U	-1.117	U	-1.117	U	-1.117
8	0.233	U	-1.089	U	-1.089	U	-1.204	U	-1.218	U	-1.206	U	-1.117	U	-1.117	U	-1.035	U	-1.035	U	-1.035	U	-1.035	U	-1.035	U	-1.035	U	-1.035
9	0.335	U	-0.787	U	-0.792	U	-0.860	U	-0.854	U	-0.906	U	-0.899	U	-0.899	U	-0.878	U	-0.878	U	-0.878	U	-0.878	U	-0.878	U	-0.878	U	-0.878
10	0.500	U	-0.503	U	-0.488	U	-0.540	U	-0.527	U	-0.611	U	-0.663	U	-0.663	U	-0.728	U	-0.728	U	-0.728	U	-0.728	U	-0.728	U	-0.728	U	-0.728
11	0.625	U	-0.344	U	-0.327	U	-0.371	U	-0.387	U	-0.472	U	-0.549	U	-0.549	U	-0.649	U	-0.649	U	-0.649	U	-0.649	U	-0.649	U	-0.649	U	-0.649
12	0.769	U	-0.167	U	-0.161	U	-0.235	U	-0.278	U	-0.361	U	-0.458	U	-0.458	U	-0.544	U	-0.544	U	-0.544	U	-0.544	U	-0.544	U	-0.544	U	-0.544
13	0.915	U	0.006	U	0.001	U	-0.137	U	-0.190	U	-0.281	U	-0.366	U	-0.366	U	-0.455	U	-0.455	U	-0.455	U	-0.455	U	-0.455	U	-0.455	U	-0.455
14	0.960	U	0.056	U	0.024	U	-0.108	U	-0.166	U	-0.256	U	-0.328	U	-0.328	U	-0.411	U	-0.411	U	-0.411	U	-0.411	U	-0.411	U	-0.411	U	-0.411
15	0.008	L	0.967	L	0.960	L	0.989	L	0.966	L	0.972	L	0.974	L	0.974	L	0.981	L	0.981	L	0.981	L	0.981	L	0.981	L	0.981	L	0.981
16	0.017	L	0.985	L	0.969	L	0.985	L	0.968	L	0.976	L	0.961	L	0.961	L	0.962	L	0.962	L	0.962	L	0.962	L	0.962	L	0.962	L	0.962
17	0.040	L	0.740	L	0.810	L	0.777	L	0.855	L	0.856	L	0.891	L	0.891	L	0.897	L	0.897	L	0.897	L	0.897	L	0.897	L	0.897	L	0.897
18	0.065	L	0.531	L	0.618	L	0.589	L	0.686	L	0.684	L	0.720	L	0.720	L	0.732	L	0.732	L	0.732	L	0.732	L	0.732	L	0.732	L	0.732
19	0.090	L	0.419	L	0.503	L	0.464	L	0.566	L	0.560	L	0.597	L	0.597	L	0.616	L	0.616	L	0.616	L	0.616	L	0.616	L	0.616	L	0.616
20	0.130	L	0.293	L	0.370	L	0.325	L	0.421	L	0.422	L	0.452	L	0.452	L	0.475	L	0.475	L	0.475	L	0.475	L	0.475	L	0.475	L	0.475
21	0.168	L	0.210	L	0.283	L	0.243	L	0.336	L	0.330	L	0.360	L	0.360	L	0.391	L	0.391	L	0.391	L	0.391	L	0.391	L	0.391	L	0.391
22	0.233	L	0.125	L	0.181	L	0.133	L	0.223	L	0.213	L	0.243	L	0.243	L	0.255	L	0.255	L	0.255	L	0.255	L	0.255	L	0.255	L	0.255
23	0.335	L	0.078	L	0.125	L	0.056	L	0.144	L	0.124	L	0.154	L	0.154	L	0.151	L	0.151	L	0.151	L	0.151	L	0.151	L	0.151	L	0.151
24	0.500	L	0.028	L	0.065	L	0.000	L	0.057	L	0.038	L	0.064	L	0.064	L	0.056	L	0.056	L	0.056	L	0.056	L	0.056	L	0.056	L	0.056
25	0.625	L	0.012	L	0.044	L	0.081	L	0.006	L	0.031	L	0.022	L	0.022	L	0.022	L	0.022	L	0.022	L	0.022	L	0.022	L	0.022	L	0.022
26	0.769	L	0.054	L	0.137	L	0.137	L	0.026	L	0.051	L	0.020	L	0.020	L	0.041	L	0.041	L	0.041	L	0.041	L	0.041	L	0.041	L	0.041
27	0.915	L	0.237	L	0.247	L	0.130	L	0.169	L	0.086	L	0.031	L	0.031	L	0.078	L	0.078	L	0.078	L	0.078	L	0.078	L	0.078	L	0.078
28	0.960	L	0.237	L	0.237	L	0.130	L	0.169	L	0.086	L	0.031	L	0.031	L	0.078	L	0.078	L	0.078	L	0.078	L	0.078	L	0.078	L	0.078

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

RUN	4	65	RUN	4	66	RUN	4	67	RUN	4	68	RUN	4	69	RUN	4	70	RUN	4	71
			MU	AU	M															
MU	0.50	MU	0.50	AU	16.0	AU	17.0	AU	18.0	AU	20.0	AU	22.0	AU	24.0	AU	26.0	AU	28.0	
AU	15.0	AU	16.0	M	0.510	M	0.511	M	0.512	M	0.514	M	0.515	M	0.516	M	0.518	M	0.520	
M	0.509	M	0.510	A	16.04	A	17.04	A	18.03	A	20.03	A	22.03	A	24.02	A	26.02	A	28.02	
A	15.05	A	16.04	Q0	322.8	Q0	323.8	Q0	324.9	Q0	326.9	Q0	328.0	Q0	330.1	Q0	331.1	Q0	332.1	
Q0	321.7	Q0	322.8	P0	1772.7	P0	1771.5	P0	1770.3	P0	1767.9	P0	1766.7	P0	1765.0	P0	1763.0	P0	1761.0	
P0	1773.9	P0	1772.7	P0	1771.5	P0	1770.3	P0	1767.9	P0	1766.7	P0	1765.0	P0	1763.0	P0	1761.0	P0	1760.0	
TAP	X/C	CP																		
1	.000	-0.806	-0.862	-0.899	-0.875	-0.807	-0.876	-0.807	-0.875	-0.775	-0.750	-0.750	-0.750	-0.750	-0.750	-0.750	-0.750	-0.750	-0.750	
2	.008	0.287	-1.345	-1.415	-1.243	-1.243	-1.243	-1.243	-1.243	-0.831	-0.831	-0.831	-0.831	-0.831	-0.831	-0.831	-0.831	-0.831	-0.831	
3	.017	-1.254	-1.299	-1.269	-1.079	-1.079	-1.079	-1.079	-1.079	-0.692	-0.692	-0.692	-0.692	-0.692	-0.692	-0.692	-0.692	-0.692	-0.692	
4	.040	-1.054	-1.074	-1.036	-1.036	-0.862	-0.862	-0.862	-0.862	-0.674	-0.674	-0.674	-0.674	-0.674	-0.674	-0.674	-0.674	-0.674	-0.674	
5	.065	-1.062	-1.053	-1.001	-1.001	-0.786	-0.786	-0.786	-0.786	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	
6	.090	-1.066	-1.039	-0.979	-0.979	-0.772	-0.772	-0.772	-0.772	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	-0.663	
7	.130	-1.087	-1.016	-0.970	-0.970	-0.788	-0.788	-0.788	-0.788	-0.689	-0.689	-0.689	-0.689	-0.689	-0.689	-0.689	-0.689	-0.689	-0.689	
8	.168	0.208	-0.991	-0.926	-0.926	-0.748	-0.748	-0.748	-0.748	-0.667	-0.667	-0.667	-0.667	-0.667	-0.667	-0.667	-0.667	-0.667	-0.667	
9	.233	0.233	-0.941	-0.939	-0.876	-0.876	-0.876	-0.876	-0.876	-0.669	-0.669	-0.669	-0.669	-0.669	-0.669	-0.669	-0.669	-0.669	-0.669	
10	.335	0.335	-0.869	-0.882	-0.848	-0.848	-0.848	-0.848	-0.848	-0.683	-0.683	-0.683	-0.683	-0.683	-0.683	-0.683	-0.683	-0.683	-0.683	
11	.500	0.500	-0.758	-0.787	-0.794	-0.794	-0.794	-0.794	-0.794	-0.721	-0.721	-0.721	-0.721	-0.721	-0.721	-0.721	-0.721	-0.721	-0.721	
12	.625	.625	-0.689	-0.724	-0.759	-0.759	-0.759	-0.759	-0.759	-0.800	-0.800	-0.800	-0.800	-0.800	-0.800	-0.800	-0.800	-0.800	-0.800	
13	.769	.769	-0.608	-0.652	-0.701	-0.701	-0.701	-0.701	-0.701	-0.702	-0.702	-0.702	-0.702	-0.702	-0.702	-0.702	-0.702	-0.702	-0.702	
14	.915	.915	-0.507	-0.559	-0.605	-0.605	-0.605	-0.605	-0.605	-0.705	-0.705	-0.705	-0.705	-0.705	-0.705	-0.705	-0.705	-0.705	-0.705	
15	.960	.960	-0.456	-0.512	-0.576	-0.576	-0.576	-0.576	-0.576	-0.666	-0.666	-0.666	-0.666	-0.666	-0.666	-0.666	-0.666	-0.666	-0.666	
16	.008	.008	0.989	0.994	0.992	0.992	0.992	0.992	0.992	0.991	0.991	0.991	0.991	0.991	0.991	0.991	0.991	0.991	0.991	
17	.017	.017	0.958	0.960	0.961	0.961	0.961	0.961	0.961	0.960	0.960	0.960	0.960	0.960	0.960	0.960	0.960	0.960	0.960	
18	.040	.040	0.897	0.914	0.925	0.925	0.925	0.925	0.925	0.928	0.928	0.928	0.928	0.928	0.928	0.928	0.928	0.928	0.928	
19	.065	.065	0.741	0.762	0.772	0.772	0.772	0.772	0.772	0.778	0.778	0.778	0.778	0.778	0.778	0.778	0.778	0.778	0.778	
20	.090	.090	0.614	0.647	0.649	0.649	0.649	0.649	0.649	0.657	0.657	0.657	0.657	0.657	0.657	0.657	0.657	0.657	0.657	
21	.130	.130	0.487	0.509	0.512	0.512	0.512	0.512	0.512	0.524	0.524	0.524	0.524	0.524	0.524	0.524	0.524	0.524	0.524	
22	.168	.168	0.397	0.423	0.430	0.430	0.430	0.430	0.430	0.435	0.435	0.435	0.435	0.435	0.435	0.435	0.435	0.435	0.435	
23	.233	.233	0.276	0.279	0.294	0.294	0.294	0.294	0.294	0.307	0.307	0.307	0.307	0.307	0.307	0.307	0.307	0.307	0.307	
24	.335	.335	0.176	0.178	0.187	0.187	0.187	0.187	0.187	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	
25	.500	.500	0.058	0.060	0.064	0.064	0.064	0.064	0.064	0.057	0.057	0.057	0.057	0.057	0.057	0.057	0.057	0.057	0.057	
26	.625	.625	-0.003	-0.017	-0.021	-0.021	-0.021	-0.021	-0.021	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	-0.028	
27	.769	.769	-0.037	-0.061	-0.069	-0.069	-0.069	-0.069	-0.069	-0.092	-0.092	-0.092	-0.092	-0.092	-0.092	-0.092	-0.092	-0.092	-0.092	
28	.915	.915	-0.083	-0.116	-0.142	-0.142	-0.142	-0.142	-0.142	-0.212	-0.212	-0.212	-0.212	-0.212	-0.212	-0.212	-0.212	-0.212	-0.212	
29	.960	.960	0.027	0.002	-0.023	-0.023	-0.023	-0.023	-0.023	-0.061	-0.061	-0.061	-0.061	-0.061	-0.061	-0.061	-0.061	-0.061	-0.061	

5-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS											
RUN	4	72	RUN	20	263	RUN	20	264	RUN	20	265
MU	0.50	MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60
AU	0.	AU	0.	AU	-2.0	AU	0.	AU	1.0	AU	2.0
M	0.502	M	0.602	M	0.602	M	0.602	M	0.602	M	0.603
A	0.	A	0.	A	-2.02	A	-4.04	A	1.01	A	2.02
Q0	314.4	Q0	421.6	Q0	421.6	Q0	422.6	Q0	421.6	Q0	422.6
P0	1782.3	P0	1661.8	P0	1661.8	P0	1660.5	P0	1661.8	P0	1660.5
CP											
1	•000	1.052	1.076	0.973	0.629	1.077	1.071	1.012	1.012	1.012	1.012
2	•008	U	0.352	0.294	0.722	0.975	0.324	0.045	0.298	0.298	0.298
3	•017	U	0.004	-0.060	0.423	0.739	-0.339	-0.317	-0.663	-0.663	-0.663
4	•040	U	-0.364	-0.428	0.012	0.352	-0.413	-0.674	-0.996	-0.996	-0.996
5	•065	U	-0.401	-0.509	-0.145	0.166	-0.486	-0.700	-0.960	-0.960	-0.960
6	•090	U	-0.476	-0.558	-0.220	0.053	-0.534	-0.721	-0.938	-0.938	-0.938
7	•130	U	-0.520	-0.718	-0.395	-0.129	-0.426	-0.620	-0.807	-0.807	-0.807
8	•168	U	-0.421	-0.540	-0.295	-0.086	-0.501	-0.640	-0.776	-0.776	-0.776
9	•233	U	-0.415	-0.508	-0.323	-0.136	-0.500	-0.603	-0.697	-0.697	-0.697
10	•15	U	-0.329	-0.409	-0.274	-0.140	-0.386	-0.456	-0.528	-0.528	-0.528
11	•500	U	-0.231	-0.343	-0.217	-0.128	-0.272	-0.325	-0.370	-0.370	-0.370
12	•625	U	-0.170	-0.244	-0.174	-0.110	-0.191	-0.229	-0.254	-0.254	-0.254
13	•769	U	-0.056	-0.094	-0.058	-0.014	-0.078	-0.105	-0.116	-0.116	-0.116
14	•915	U	0.087	0.055	0.079	0.100	0.089	0.068	0.064	0.064	0.064
15	•960	U	0.187	0.166	0.186	0.214	0.189	0.176	0.169	0.169	0.169
16	•008	L	0.167	0.241	-0.376	-1.109	0.234	0.461	0.677	0.677	0.677
17	•017	L	-0.202	-0.167	-0.801	-1.564	-0.184	0.086	0.323	0.323	0.323
18	•040	L	-0.394	-0.405	-0.951	-1.666	-0.431	-0.201	0.021	0.021	0.021
19	•065	L	-0.519	-0.516	-1.024	-1.691	-0.524	-0.336	-0.149	-0.149	-0.149
20	•090	L	-0.520	-0.564	-0.950	-1.504	-0.566	-0.391	-0.227	-0.227	-0.227
21	•130	L	-0.536	-0.594	-0.907	-1.199	-0.601	-0.455	-0.307	-0.307	-0.307
22	•168	L	-0.483	-0.532	-0.779	-1.036	-0.539	-0.412	-0.150	-0.150	-0.150
23	•233	L	-0.472	-0.533	-0.721	-0.913	-0.540	-0.446	-0.353	-0.353	-0.353
24	•335	L	-0.370	-0.413	-0.555	-0.676	-0.415	-0.361	-0.287	-0.287	-0.287
25	•500	L	-0.258	-0.289	-0.377	-0.451	-0.296	-0.261	-0.206	-0.206	-0.206
26	•625	L	-0.177	-0.201	-0.257	-0.300	-0.194	-0.183	-0.150	-0.150	-0.150
27	•769	L	-0.046	-0.089	-0.104	-0.133	-0.078	-0.060	-0.045	-0.045	-0.045
28	•915	L	0.110	0.074	0.067	0.071	0.093	0.080	0.098	0.098	0.098
29	•960	L	0.211	0.176	0.157	0.195	0.195	0.195	0.201	0.201	0.201

5-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS											
RUN	20	269	RUN	20	270	RUN	20	271	RUN	20	272
MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60
AU	4.0	AU	6.0	AU	8.0	AU	10.0	AU	12.0	AU	13.0
M	0.603	M	0.604	M	0.605	M	0.609	M	0.610	M	0.614
A	4.04	A	6.06	A	8.07	A	10.06	A	12.05	A	13.05
Q0	422.6	Q0	423.7	Q0	424.8	Q0	429.1	Q0	432.3	Q0	434.4
P0	1660.5	P0	1659.2	P0	1657.9	P0	1652.7	P0	1651.4	P0	1648.7
CP											
1	0.000	0.688	0.336	0.099	-0.053	-0.116	-0.186	-0.242	-0.301	-0.358	-0.415
2	0.008	U	U	-1.052	-1.687	-1.984	-2.127	-2.144	-1.996	-1.750	-1.505
3	0.017	U	U	-1.444	-2.037	-2.279	-2.330	-2.183	-1.797	-1.211	-0.945
4	0.040	U	U	-1.776	-2.279	-2.513	-2.168	-1.790	-1.387	-1.037	-0.743
5	0.065	U	U	-1.772	-2.423	-2.590	-1.806	-1.439	-1.244	-0.944	-0.644
6	0.090	U	U	-1.573	-2.371	-2.499	-1.622	-1.350	-1.211	-0.945	-0.645
7	0.130	U	U	-1.102	-1.832	-2.167	-1.728	-1.410	-1.243	-1.036	-0.736
8	0.168	U	U	-1.036	-1.560	-1.763	-1.324	-1.178	-1.127	-0.927	-0.627
9	0.233	U	U	-0.915	-0.889	-1.306	-1.151	-1.058	-1.057	-0.911	-0.611
10	0.335	U	U	-0.659	-0.706	-0.775	-0.925	-0.913	-0.947	-0.889	-0.689
11	0.500	U	U	-0.457	-0.493	-0.477	-0.659	-0.723	-0.770	-0.828	-0.628
12	0.625	U	U	-0.312	-0.342	-0.331	-0.525	-0.615	-0.673	-0.774	-0.674
13	0.769	U	U	-0.145	-0.160	-0.178	-0.404	-0.511	-0.565	-0.684	-0.564
14	0.915	U	U	0.051	0.035	-0.030	-0.311	-0.408	-0.461	-0.564	-0.505
15	0.960	U	U	0.136	0.109	0.025	-0.276	-0.374	-0.422	-0.505	-0.447
16	0.008	L	U	0.953	0.960	0.948	0.947	0.944	0.941	0.947	0.947
17	0.017	L	U	0.680	0.884	0.969	0.998	0.985	0.977	0.965	0.965
18	0.040	L	U	0.356	0.578	0.692	0.750	0.777	0.814	0.837	0.837
19	0.065	L	U	0.165	0.366	0.494	0.550	0.582	0.617	0.650	0.650
20	0.090	L	U	0.066	0.256	0.382	0.434	0.464	0.498	0.534	0.534
21	0.130	L	U	0.047	0.141	0.250	0.298	0.327	0.358	0.395	0.395
22	0.168	L	U	0.068	0.086	0.185	0.235	0.254	0.287	0.316	0.316
23	0.233	L	U	-0.157	-0.017	0.074	0.109	0.130	0.153	0.180	0.180
24	0.335	L	U	-0.147	-0.042	0.017	0.040	0.048	0.066	0.085	0.085
25	0.500	L	U	-0.108	-0.033	0.004	-0.002	-0.001	0.005	0.014	0.014
26	0.625	L	U	-0.079	-0.032	-0.007	-0.042	-0.053	-0.053	-0.058	-0.058
27	0.769	L	U	-0.001	0.021	0.028	-0.060	-0.070	-0.070	-0.089	-0.089
28	0.915	L	U	0.121	0.126	0.105	-0.040	-0.040	-0.069	-0.103	-0.103
29	0.960	L	U	0.234	0.233	0.211	0.093	0.067	0.038	0.015	0.015

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS									
	RUN	20	276	RUN	20	277	RUN	20	278
MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60
AU	14.0	AU	15.0	AU	16.0	AU	0.	AU	0.
M	0.615	M	0.616	M	0.617	M	0.602	M	0.653
A	14.05	A	15.05	A	16.04	A	0.	A	-1.01
Q0	435.5	Q0	436.5	Q0	437.6	Q0	421.6	Q0	474.7
P0	1644.8	P0	1643.5	P0	1642.1	P0	1661.8	P0	1590.5
TAP X/C	CP								
1 • 000	-0.282	-0.341	-0.431	-0.666	-1.088	1.085	1.015	1.015	1.015
2 • 008	0.393	-1.194	-1.268	0.295	0.306	0.532	0.723	0.723	0.723
3 • 017	-1.078	-1.013	-1.207	-0.060	-0.067	0.179	0.411	0.411	0.411
4 • 040	0.873	-0.814	-0.956	-0.437	-0.459	-0.226	-0.006	-0.006	-0.006
5 • 065	0.875	-0.822	-0.897	-0.506	-0.547	-0.343	-0.147	-0.147	-0.147
6 • 090	0.885	-0.840	-0.878	-0.554	-0.613	-0.438	-0.249	-0.249	-0.249
7 • 130	0.936	-0.9	-0.820	-0.639	-0.626	-0.534	-0.370	-0.370	-0.370
8 • 168	0.877	-0.	-0.824	-0.524	-0.583	-0.457	-0.315	-0.315	-0.315
9 • 233	0.835	-0.	-0.828	-0.510	-0.555	-0.456	-0.339	-0.339	-0.339
10 • 335	0.830	-0.	-0.799	-0.404	-0.425	-0.367	-0.283	-0.283	-0.283
11 • 500	0.823	-0.817	-0.817	-0.320	-0.294	-0.279	-0.204	-0.204	-0.204
12 • 625	0.810	-0.827	-0.838	-0.237	-0.219	-0.209	-0.160	-0.160	-0.160
13 • 769	0.759	-0.806	-0.832	-0.097	-0.081	-0.075	-0.043	-0.043	-0.043
14 • 915	0.646	-0.722	-0.758	0.054	0.084	0.075	0.098	0.098	0.098
15 • 960	0.586	-0.665	-0.707	0.171	0.194	0.184	0.204	0.204	0.204
16 • 008	0.945	0.948	0.947	0.242	0.327	0.048	-0.243	-0.243	-0.243
17 • 017	0.958	0.954	0.949	-0.147	-0.066	-0.363	-0.663	-0.663	-0.663
18 • 040	0.861	0.880	0.904	-0.396	-0.345	-0.611	-0.896	-0.896	-0.896
19 • 065	0.681	0.709	0.719	-0.529	-0.492	-0.749	-1.036	-1.036	-1.036
20 • 090	0.558	0.586	0.612	-0.558	-0.535	-0.757	-1.001	-1.001	-1.001
21 • 130	0.413	0.435	0.461	-0.596	-0.580	-0.778	-0.977	-0.977	-0.977
22 • 168	0.341	0.364	0.382	-0.537	-0.530	-0.680	-0.831	-0.831	-0.831
23 • 233	0.200	0.221	0.238	-0.534	-0.526	-0.655	-0.749	-0.749	-0.749
24 • 335	0.095	0.107	0.124	-0.424	-0.407	-0.497	-0.560	-0.560	-0.560
25 • 500	0.015	0.015	0.021	-0.301	-0.283	-0.352	-0.381	-0.381	-0.381
26 • 625	-0.074	-0.077	-0.080	-0.213	-0.182	-0.228	-0.243	-0.243	-0.243
27 • 769	-0.112	-0.124	-0.134	-0.075	-0.050	-0.082	-0.090	-0.090	-0.090
28 • 915	-0.144	-0.171	-0.184	0.099	0.111	0.094	0.096	0.096	0.096
29 • 960	-0.024	-0.065	-0.074	0.198	0.232	0.202	0.200	0.200	0.200

S-20 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

TAP	X/C	RUN	8 129	RUN	8 130	RUN	8 131	RUN	8 132	RUN	8 133	RUN	8 134	RUN	8 135
MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65
AU	-3.0	AU	-4.0	AU	0.	AU	1.0	AU	2.0	AU	3.0	AU	4.0	AU	4.0
M	0.653	M	0.654	M	0.653	M	0.653	M	0.653	M	0.653	M	0.654	M	0.654
A	-3.03	A	-4.04	A	0.	A	1.01	A	2.02	A	3.03	A	4.05	A	4.05
OO	474.7	OO	475.8	OO	474.7	OO	474.7	OO	474.7	OO	474.7	OO	475.8	OO	475.8
PO	1590.5	PO	1589.1	PO	1590.5	PO	1589.1								
CP															
TAP	X/C	CP	0.895	CP	0.752	CP	1.095	CP	1.021	CP	0.898	CP	0.769	CP	0.769
1	0.00	U	0.860	U	0.950	U	0.317	U	0.040	U	-0.590	U	-0.849	U	-0.849
2	0.008	U	0.588	U	0.702	U	-0.053	U	-0.341	U	-0.970	U	-1.248	U	-1.248
3	0.017	U	0.176	U	0.316	U	-0.455	U	-0.741	U	-1.379	U	-1.611	U	-1.611
4	0.040	U	0.012	U	0.134	U	-0.531	U	-0.783	U	-1.113	U	-1.739	U	-1.739
5	0.065	U	0.095	U	0.021	U	-0.600	U	-0.816	U	-1.082	U	-1.729	U	-1.729
6	0.090	U	-0.095	U	-0.14	U	-0.500	U	-0.688	U	-0.957	U	-1.516	U	-1.516
7	0.130	U	-0.226	U	-0.120	U	-0.567	U	-0.711	U	-0.887	U	-1.705	U	-1.705
8	0.168	U	-0.205	U	-0.175	U	-0.550	U	-0.664	U	-0.769	U	-0.909	U	-0.909
9	0.233	U	-0.247	U	-0.222	U	-0.168	U	-0.419	U	-0.491	U	-0.639	U	-0.634
10	0.335	U	-0.170	U	-0.141	U	-0.286	U	-0.334	U	-0.382	U	-0.452	U	-0.452
11	0.500	U	-0.138	U	-0.131	U	-0.210	U	-0.237	U	-0.275	U	-0.335	U	-0.335
12	0.625	U	-0.032	U	-0.027	U	-0.079	U	-0.093	U	-0.115	U	-0.164	U	-0.164
13	0.769	U	0.093	U	0.097	U	0.095	U	0.090	U	0.077	U	0.032	U	0.032
14	0.915	U	0.960	U	0.210	U	0.204	U	0.196	U	0.176	U	0.125	U	0.125
15	0.008	L	-0.589	L	-0.863	L	0.306	L	0.533	L	0.724	L	0.859	L	0.930
16	0.017	L	-1.038	L	-1.303	L	-0.092	L	0.174	L	0.387	L	0.555	L	0.664
17	0.040	L	-1.0210	L	-1.478	L	-0.366	L	-0.130	L	0.063	L	0.231	L	0.340
18	0.065	L	-1.464	L	-1.686	L	-0.509	L	-0.300	L	-0.112	L	0.036	L	0.134
19	0.090	L	-1.425	L	-1.717	L	-0.556	L	-0.358	L	0.199	L	0.066	L	0.029
20	0.130	L	-1.246	L	-1.746	L	-0.603	L	-0.431	L	0.283	L	0.167	L	0.084
21	0.168	L	-0.928	L	-1.671	L	-0.542	L	-0.401	L	0.290	L	0.169	L	0.164
22	0.233	L	-0.865	L	-1.686	L	-0.548	L	-0.436	L	0.346	L	0.259	L	0.202
23	0.335	L	-0.638	L	-1.425	L	-0.653	L	-0.420	L	-0.344	L	0.278	L	0.192
24	0.500	L	-0.426	L	-0.457	L	-0.296	L	-0.242	L	-0.203	L	0.169	L	0.164
25	0.625	L	-0.278	L	-0.303	L	-0.200	L	-0.182	L	-0.118	L	0.127	L	0.127
26	0.769	L	-0.114	L	-0.135	L	-0.074	L	-0.039	L	0.037	L	0.024	L	0.047
27	0.915	L	0.080	L	0.068	L	0.092	L	0.119	L	0.110	L	0.071	L	0.071
28	0.960	L	0.177	L	0.163	L	0.203	L	0.229	L	0.216	L	0.223	L	0.162

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

TAP X/C	RUN	RUN 8 136		RUN 8 137		RUN 8 138		RUN 8 139		RUN 8 140		RUN 8 141		RUN 8 142	
		MU	AU												
1 .000	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.65
2 .008	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
3 .017	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
4 .040	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
5 .065	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
6 .090	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
7 .130	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
8 .168	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
9 .233	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
10 .335	U	U	U	U	U	U	U	U	U	U	U	U	U	U	U
11 .500	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429	-0.429
12 .625	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316	-0.316
13 .769	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153	-0.153
14 .915	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022	0.022
15 .960	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102	0.102
16 .008	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958	0.958
17 .017	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853	0.853
18 .040	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540	0.540
19 .065	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
20 .090	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229	0.229
21 .130	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111	0.111
22 .168	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062	0.062
23 .233	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042	-0.042
24 .335	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068	-0.068
25 .500	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067	-0.067
26 .625	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045	-0.045
27 .769	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019	0.019
28 .915	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126	0.126
29 .960	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245	0.245

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	8 143	RUN	8 144	RUN	8 145	RUN	8 146	RUN	8 147	RUN	8 148	RUN	8 149
	MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65	MU	0.65
	AU	12.0	AU	13.0	AU	14.0	AU	15.0	AU	16.0	AU	17.0	AU	18.0
	M	0.666	M	0.668	M	0.669	M	0.671	M	0.673	M	0.674	M	0.675
	A	12.04	A	13.04	A	14.04	A	15.04	A	16.04	A	17.04	A	18.04
	Q0	488.4	Q0	490.5	Q0	491.5	Q0	493.6	Q0	495.7	Q0	496.8	Q0	497.8
	P0	1573.0	P0	1570.3	P0	1569.0	P0	1566.3	P0	1563.6	P0	1562.2	P0	1560.9
TAP	X/C													
1	.000	CP	-0.089	-0.010	CP	-0.087	CP	-0.166	CP	-0.269	CP	-0.365	CP	-0.431
2	.008	U	-1.656	-1.633	U	-1.732	U	-1.727	U	-1.693	U	-1.767	U	-1.614
3	.017	U	-1.725	-1.582	U	-1.633	U	-1.774	U	-1.808	U	-1.892	U	-1.598
4	.040	U	-1.218	-1.269	U	-1.090	U	-0.935	U	-1.446	U	-1.552	U	-1.408
5	.065	U	-1.082	-1.155	U	-1.024	U	-0.880	U	-1.426	U	-1.543	U	-1.364
6	.090	U	-1.046	-1.121	U	-1.003	U	-0.875	U	-1.434	U	-1.551	U	-1.343
7	.130	U	-1.059	-1.054	U	-0.972	U	-0.881	U	-1.242	U	-1.426	U	-1.331
8	.168	U	-0.968	-1.050	U	-0.962	U	-0.853	U	-1.416	U	-1.426	U	-1.195
9	.233	U	-0.921	-1.003	U	-0.918	U	-0.861	U	-1.313	U	-1.272	U	-1.124
10	.335	U	-0.870	-0.913	U	-0.857	U	-0.818	U	-1.016	U	-1.022	U	-0.970
11	.500	U	-0.811	-0.818	U	-0.807	U	-0.811	U	-0.833	U	-0.871	U	-0.893
12	.625	U	-0.770	-0.783	U	-0.810	U	-0.834	U	-0.846	U	-0.883	U	-0.909
13	.769	U	-0.705	-0.723	U	-0.794	U	-0.844	U	-0.856	U	-0.894	U	-0.924
14	.915	U	-0.600	-0.636	U	-0.729	U	-0.807	U	-0.834	U	-0.879	U	-0.909
15	.650	U	-0.556	-0.597	U	-0.684	U	-0.766	U	-0.806	U	-0.863	U	-0.889
16	.008	U	0.930	0.933	U	0.929	U	0.929	U	0.927	U	0.933	U	0.947
17	.017	L	0.984	0.970	L	0.957	L	0.950	L	0.935	L	0.934	L	0.932
18	.040	L	0.770	0.810	L	0.837	L	0.864	L	0.909	L	0.923	L	0.943
19	.065	L	0.588	0.627	L	0.657	L	0.691	L	0.742	L	0.759	L	0.786
20	.090	L	0.469	0.509	L	0.534	L	0.568	L	0.622	L	0.637	L	0.664
21	.130	L	0.320	0.357	L	0.391	L	0.425	L	0.471	L	0.498	L	0.526
22	.168	L	0.252	0.278	L	0.304	L	0.331	L	0.380	L	0.409	L	0.436
23	.233	L	0.109	0.137	L	0.167	L	0.195	L	0.238	L	0.261	L	0.277
24	.335	L	0.023	0.039	L	0.064	L	0.080	L	0.115	L	0.130	L	0.150
25	.500	L	-0.059	-0.047	L	-0.043	L	-0.021	L	0.003	L	0.007	L	0.017
26	.625	L	-0.113	-0.109	L	-0.111	L	-0.110	L	-0.095	L	-0.099	L	-0.098
27	.769	L	-0.128	-0.139	L	-0.156	L	-0.162	L	-0.154	L	-0.168	L	-0.172
28	.915	L	-0.133	-0.153	L	-0.183	L	-0.204	L	-0.205	L	-0.223	L	-0.239
29	.960	L	-0.007	-0.015	L	-0.045	L	-0.068	L	-0.058	L	-0.084	L	-0.093

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS									
	RUN	8 150	RUN	8 151	RUN	8 152	RUN	9 153	RUN
	MU	0.65	MU	0.65	MU	0.65	MU	0.70	MU
AU	19.0	AU	20.0	AU	0.	AU	0.	AU	-2.0
M	0.676	M	0.677	M	0.653	M	0.704	M	0.704
A	19.04	A	20.03	A	0.	A	0.	A	-2.03
00	498.9	00	499.9	00	474.7	00	527.8	00	528.9
P0	1559.5	P0	1558.2	P0	1590.5	P0	1521.5	P0	1521.5
TAP X/C	CP								
1	.000	-0.803	-0.614	1.038	1.111	1.03	1.049	0.966	0.966
2	.008	U	-1.794	-1.754	0.360	0.363	0.564	0.734	0.846
3	.017	U	-1.735	-1.738	0.006	-0.015	0.217	0.418	0.565
4	.040	U	-1.492	-1.449	-0.381	-0.454	-0.213	0.000	0.152
5	.065	U	-1.468	-1.450	-0.448	-0.553	-0.334	-0.153	-0.006
6	.090	U	-1.461	-1.451	-0.519	-0.651	-0.436	-0.260	-0.120
7	.130	U	-1.491	-1.361	-0.672	-0.707	-0.542	-0.402	-0.257
8	.168	U	-1.409	-1.404	-0.481	-0.636	-0.477	-0.338	-0.239
9	.233	U	-1.392	-1.324	-0.460	-0.626	-0.488	-0.374	-0.288
10	.335	U	-1.280	-1.207	-0.337	-0.457	-0.388	-0.315	-0.258
11	.500	U	-1.232	-1.110	-0.227	-0.316	-0.279	-0.235	-0.198
12	.625	U	-1.249	-1.110	-0.155	-0.233	-0.207	-0.181	-0.152
13	.769	U	-1.259	-1.115	-0.021	-0.080	-0.069	-0.050	-0.046
14	.915	U	-1.249	-1.115	0.137	0.096	0.099	0.104	0.102
15	.960	U	-1.238	-1.110	0.232	0.200	0.208	0.216	0.217
16	.008	L	0.742	0.974	0.359	0.349	0.101	-0.149	-0.391
17	.017	L	0.774	0.937	-0.009	-0.053	-0.322	-0.586	-0.818
18	.040	L	0.642	0.970	-0.278	-0.345	-0.598	-0.821	-1.023
19	.065	L	0.484	0.808	-0.418	-0.526	-0.798	-1.078	-1.276
20	.090	L	0.370	0.694	-0.458	-0.586	-0.834	-1.115	-1.295
21	.130	L	0.217	0.535	-0.501	-0.663	-0.950	-1.156	-1.388
22	.168	L	0.134	0.442	-0.448	-0.593	-0.775	-1.139	-1.382
23	.233	L	0.022	0.270	-0.458	-0.609	-0.748	-0.937	-1.423
24	.335	L	-0.153	0.126	-0.346	-0.460	-0.540	-0.581	-0.602
25	.500	L	-0.292	-0.028	-0.223	-0.317	-0.369	-0.407	-0.404
26	.625	L	-0.418	-0.166	-0.125	-0.208	-0.242	-0.262	-0.275
27	.769	L	-0.500	-0.265	-0.004	-0.067	-0.085	-0.096	-0.109
28	.915	L	-0.572	-0.353	0.148	0.118	0.107	0.096	0.082
29	.960	L	-0.423	-0.195	0.264	0.223	0.206	0.196	0.193

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	9 157	RUN	9 158	RUN	9 160	RUN	9 161	RUN	9 162	RUN	9 163	RUN	9 164
	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70
AU	-4.0	AU	0.	AU	2.0	AU	3.0	AU	4.0	AU	5.0	AU	6.0	
M	0.706	M	0.704	M	0.704	M	0.705	M	0.706	M	0.708	M	0.709	
A	-4.05	A	0.	A	2.03	A	3.04	A	4.05	A	5.05	A	6.06	
Q0	529.9	Q0	527.8	Q0	527.8	Q0	528.9	Q0	529.9	Q0	531.9	Q0	533.0	
P0	1518.7	P0	1521.5	P0	1521.5	P0	1520.1	P0	1518.7	P0	1516.0	P0	1514.6	
TAP X/C		CP		CP		CP		CP		CP		CP		CP
1	•000	0.878	1.102	1.061	0.980	0.994	0.811	0.760						
2	•008	0.924	0.104	-0.151	-0.375	-0.529	-0.661	-0.832						
3	•017	0.661	-0.285	-0.540	-0.755	-0.916	-1.064	-1.155						
4	•040	0.259	-0.730	-0.979	-1.151	-1.285	-1.390	-1.445						
5	•065	0.096	-0.826	-1.124	-1.320	-1.433	-1.541	-1.613						
6	•090	-0.022	-0.889	-1.145	-1.328	-1.459	-1.563	-1.599						
7	•130	-0.168	-0.963	-1.137	-1.341	-1.487	-1.580	-1.618						
8	•168	-0.156	-0.849	-1.201	-1.400	-1.535	-1.602	-1.650						
9	•233	-0.212	-0.757	-1.226	-1.443	-1.573	-1.616	-1.642						
10	•335	-0.201	-0.544	-0.543	-0.680	-1.078	-0.992	-1.012						
11	•500	-0.174	-0.370	-0.391	-0.391	-0.335	-0.467	-0.623						
12	•625	-0.137	-0.266	-0.284	-0.292	-0.278	-0.246	-0.260						
13	•769	-0.039	-0.106	-0.121	-0.123	-0.130	-0.125	-0.113						
14	•915	0.105	0.081	0.080	0.069	0.053	0.025	0.012						
15	•960	0.215	0.184	0.180	0.174	0.146	0.096	0.079						
16	•008	-0.548	0.550	0.727	0.843	0.932	0.988	0.966						
17	•017	-0.965	0.186	0.388	0.532	0.653	0.727	0.811						
18	•040	-1.152	-0.125	0.065	0.207	0.332	0.410	0.505						
19	•065	-1.388	-0.314	-0.128	0.025	0.133	0.213	0.298						
20	•090	-1.437	-0.386	-0.217	-0.074	0.033	0.107	0.188						
21	•130	-1.491	-0.473	-0.316	-0.186	-0.093	-0.018	0.058						
22	•168	-1.505	-0.440	-0.313	-0.205	-0.120	-0.058	0.013						
23	•233	-1.534	-0.481	-0.372	-0.281	-0.204	-0.151	-0.095						
24	•335	-1.002	-0.381	-0.311	-0.248	-0.195	-0.164	-0.119						
25	•500	-0.352	-0.265	-0.213	-0.187	-0.152	-0.139	-0.113						
26	•625	-0.264	-0.181	-0.152	-0.125	-0.109	-0.104	-0.094						
27	•769	-0.111	-0.050	-0.035	-0.023	-0.016	-0.022	-0.023						
28	•915	0.069	0.111	0.126	0.129	0.111	0.111	0.103						
29	•960	0.165	0.229	0.237	0.240	0.229	0.227	0.227						

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	9 165	RUN	9 166	RUN	9 167	RUN	9 168	RUN	9 169	RUN	9 170	RUN	9 171
	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70
	AU	7.0	AU	8.0	AU	9.0	AU	10.0	AU	11.0	AU	12.0	AU	13.0
M	0.711	M	0.713	M	0.715	M	0.717	M	0.719	M	0.721	M	0.724	
A	7.06	A	8.06	A	9.05	A	10.05	A	11.05	A	12.04	A	13.04	
Q0	535.0	Q0	537.1	Q0	539.1	Q0	541.1	Q0	543.2	Q0	545.2	Q0	548.2	
P0	1511.9	P0	1509.2	P0	1506.4	P0	1503.7	P0	1501.0	P0	1498.2	P0	1494.1	
TAP X/C	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP
1	0.000	0.652	0.585	0.509	0.438	0.371	0.311	0.253	-1.000	-1.437	-1.437	-1.503	-1.503	
2	0.008	0.980	-1.066	-1.191	-1.292	-1.383	-1.437	-1.503	-1.000	-1.583	-1.583	-1.611	-1.611	
3	0.017	U	U	-1.292	-1.379	-1.441	-1.490	-1.513	-1.538	-1.583	-1.583	-1.611	-1.611	
4	0.040	U	U	-1.558	-1.628	-1.645	-1.583	-1.454	-1.228	-0.872	-0.872	-0.849	-0.849	
5	0.065	U	U	-1.697	-1.726	-1.640	-1.471	-1.371	-1.045	-0.828	-0.828	-0.817	-0.817	
6	0.090	U	U	-1.669	-1.717	-1.573	-1.391	-1.300	-1.002	-0.821	-0.821	-0.810	-0.810	
7	0.130	U	U	-1.689	-1.703	-1.536	-1.339	-1.235	-1.036	-0.817	-0.817	-0.806	-0.806	
8	0.168	U	U	-1.726	-1.578	-1.294	-1.156	-1.086	-0.898	-0.810	-0.810	-0.803	-0.803	
9	0.233	U	U	-1.679	-1.271	-1.090	-1.016	-0.965	-0.856	-0.806	-0.806	-0.803	-0.803	
10	0.335	U	U	-1.123	-1.023	-0.934	-0.894	-0.867	-0.828	-0.806	-0.806	-0.771	-0.771	
11	0.500	U	U	-0.646	-0.759	-0.781	-0.812	-0.820	-0.821	-0.780	-0.780	-0.756	-0.756	
12	0.625	U	U	-0.357	-0.554	-0.660	-0.761	-0.793	-0.823	-0.838	-0.838	-0.849	-0.849	
13	0.769	U	U	-0.188	-0.375	-0.537	-0.677	-0.742	-0.808	-0.806	-0.806	-0.803	-0.803	
14	0.915	U	U	-0.066	-0.246	-0.416	-0.565	-0.648	-0.738	-0.780	-0.780	-0.756	-0.756	
15	0.960	U	U	-0.016	-0.208	-0.368	-0.511	-0.601	-0.693	-0.780	-0.780	-0.756	-0.756	
16	0.008	L	0.960	0.954	0.944	0.933	0.924	0.923	0.920	0.920	0.920	0.920	0.920	
17	0.017	L	0.846	0.879	0.922	0.952	0.985	0.990	0.983	0.983	0.983	0.983	0.983	
18	0.040	L	0.536	0.572	0.632	0.674	0.710	0.746	0.771	0.771	0.771	0.771	0.771	
19	0.065	L	0.342	0.379	0.438	0.481	0.522	0.552	0.576	0.576	0.576	0.576	0.576	
20	0.090	L	0.230	0.261	0.324	0.363	0.198	0.430	0.456	0.456	0.456	0.456	0.456	
21	0.130	L	0.093	0.125	0.182	0.218	0.256	0.287	0.311	0.311	0.311	0.311	0.311	
22	0.168	L	0.045	0.073	0.120	0.146	0.184	0.218	0.243	0.243	0.243	0.243	0.243	
23	0.233	L	0.067	-0.055	-0.009	0.047	0.073	0.086	0.086	0.086	0.086	0.086	0.086	
24	0.335	L	0.108	-0.102	-0.074	-0.062	-0.044	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	
25	0.500	L	0.117	-0.131	-0.119	-0.110	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	-0.109	
26	0.625	L	0.108	-0.134	-0.136	-0.153	-0.150	-0.158	-0.158	-0.158	-0.158	-0.158	-0.158	
27	0.769	L	0.049	-0.094	-0.115	-0.149	-0.168	-0.188	-0.212	-0.212	-0.212	-0.212	-0.212	
28	0.915	L	0.059	-0.006	-0.053	-0.106	-0.174	-0.206	-0.206	-0.206	-0.206	-0.206	-0.206	
29	0.960	L	0.187	0.117	0.073	0.021	-0.005	-0.032	-0.054	-0.054	-0.054	-0.054	-0.054	

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN	9 172	RUN	9 173	RUN	9 174	RUN	9 175	RUN	18 227	RUN	18 228	RUN	18 229
	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.75	MU	0.75	MU	0.75
AU	14.0	AU	15.0	AU	16.0	AU	0.	AU	0.	AU	-1.0	AU	-2.0	
M	0.725	M	0.727	M	0.729	M	0.704	M	0.755	M	0.756	M	0.757	
A	14.04	A	15.04	A	16.04	A	0.	A	0.	A	-1.02	A	-2.03	
QO	549.2	QO	551.3	QO	553.3	QO	527.8	QO	581.1	QO	582.1	QO	583.1	
PO	1492.7	PO	1490.0	PO	1487.3	PO	1521.5	PO	1456.3	PO	1454.9	PO	1453.5	
TAP X/C		CP		CP		CP		CP		CP		CP		CP
1	.000	0.185		0.100		0.005		1.104		1.131		1.127		1.097
2	.008	U		-1.487		-1.485		-1.585		0.345		0.430		0.607
3	.017	U		-1.173		-1.436		-1.729		-0.031		0.066		0.264
4	.040	U		-0.862		-0.998		-1.284		-0.478		-0.366		0.406
5	.065	U		-0.818		-0.965		-1.277		-0.572		-0.511		0.001
6	.090	U		-0.811		-0.950		-1.255		-0.667		-0.613		-0.419
7	.130	U		-0.823		-0.929		-1.200		-0.862		-0.742		-0.605
8	.168	U		-0.790		-0.930		-1.174		-0.657		-0.783		-0.520
9	.233	U		-0.789		-0.923		-1.071		-0.627		-0.793		-0.570
10	.335	U		-0.800		-0.906		-1.027		-0.471		-0.496		-0.452
11	.500	U		-0.827		-0.908		-0.969		-0.342		-0.332		-0.369
12	.625	U		-0.856		-0.924		-0.982		-0.255		-0.235		-0.275
13	.769	U		-0.881		-0.947		-0.996		-0.092		-0.079		-0.203
14	.915	U		-0.862		-0.931		-0.984		0.075		0.104		-0.064
15	.960	U		-0.833		-0.900		-0.964		0.193		0.212		0.220
16	.008	L		0.917		0.914		0.918		0.348		0.371		0.016
17	.017	L		0.967		0.945		0.936		-0.039		-0.017		-0.395
18	.040	L		0.803		0.855		0.881		-0.345		-0.335		-0.656
19	.065	L		0.620		0.677		0.703		-0.524		-0.547		-0.893
20	.090	L		0.493		0.552		0.584		-0.585		-0.629		-0.961
21	.130	L		0.350		0.401		0.437		-0.662		-0.790		-1.055
22	.168	L		0.271		0.313		0.349		-0.595		-0.814		-1.078
23	.233	L		0.113		0.160		0.193		-0.608		-0.812		-1.172
24	.335	L		0.013		0.044		0.058		-0.466		-0.486		-1.039
25	.500	L		-0.091		-0.067		-0.054		-0.320		-0.343		-0.498
26	.625	L		-0.171		-0.163		-0.151		-0.204		-0.222		-0.213
27	.769	L		-0.220		-0.220		-0.215		-0.061		-0.066		-0.060
28	.915	L		-0.220		-0.224		-0.222		0.112		0.124		0.111
29	.960	L		-0.065		-0.065		-0.066		0.219		0.224		0.212

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS									
	RUN 18	230	RUN 18	231	RUN 18	232	RUN 18	233	RUN 18
MU	0.75	MU	0.75	MU	0.75	MU	0.75	MU	0.75
AU	-3.0	AU	-4.0	AU	0.0	AU	1.0	AU	2.0
M	0.758	M	0.760	M	0.755	M	0.756	M	0.757
A	-3.04	A	-4.04	A	0.	A	1.02	A	2.03
Q0	584.1	Q0	586.0	Q0	581.1	Q0	582.1	Q0	583.1
P0	1452.2	P0	1449.4	P0	1456.3	P0	1454.9	P0	1452.2
TAP X/C	CP								
1 • 000	1.045	1.001	1.131	1.076	1.117	1.029	1.076	1.029	1.029
2 • 008	0.819	0.890	0.432	0.259	0.074	-0.067	-0.291	-0.432	-0.168
3 • 017	0.518	0.605	0.063	-0.101	-0.291	-0.708	-0.823	-0.919	-0.551
4 • 040	0.128	0.215	-0.368	-0.540	-0.691	-0.877	-1.007	-1.111	-1.111
5 • 065	-0.048	0.035	-0.521	-0.691	-0.908	-1.028	-1.134	-1.134	-1.134
6 • 090	-0.170	-0.088	-0.614	-0.713	-0.908	-1.028	-1.148	-1.148	-1.148
7 • 130	-0.321	-0.217	-0.728	-0.782	-0.902	-1.019	-1.239	-1.239	-1.239
8 • 168	-0.302	-0.231	-0.790	-0.889	-1.033	-1.136	-1.319	-1.319	-1.319
9 • 233	-0.377	-0.314	-0.800	-1.004	-1.136	-1.225	-1.327	-1.327	-1.327
10 • 335	-0.328	-0.297	-0.508	-0.905	-1.152	-1.258	-1.428	-1.428	-1.428
11 • 500	-0.251	-0.243	-0.337	-0.317	-0.391	-0.581	-0.692	-0.692	-0.692
12 • 625	-0.193	-0.203	-0.252	-0.233	-0.203	-0.220	-0.547	-0.547	-0.547
13 • 769	-0.074	-0.093	-0.093	-0.084	-0.062	-0.073	-0.182	-0.182	-0.182
14 • 915	0.101	0.081	0.094	0.104	0.102	0.082	0.028	0.028	0.028
15 • 960	0.211	0.193	0.209	0.219	0.205	0.172	0.081	0.081	0.081
16 • 008	-0.121	-0.250	0.367	0.542	0.679	0.783	0.856	0.856	0.856
17 • 017	-0.547	-0.655	-0.037	0.149	0.326	0.458	0.557	0.557	0.557
18 • 040	-0.776	-0.856	-0.341	-0.163	0.011	0.138	0.228	0.228	0.228
19 • 065	-1.027	-1.097	-0.554	-0.354	-0.188	-0.057	0.033	0.033	0.033
20 • 090	-1.060	-1.157	-0.633	-0.449	-0.288	-0.168	-0.080	-0.080	-0.080
21 • 130	-1.165	-1.236	-0.795	-0.609	-0.421	-0.298	-0.210	-0.210	-0.210
22 • 168	-1.177	-1.259	-0.813	-0.562	-0.399	-0.294	-0.225	-0.225	-0.225
23 • 233	-1.258	-1.340	-0.809	-0.637	-0.481	-0.387	-0.325	-0.325	-0.325
24 • 335	-1.285	-1.281	-0.475	-0.436	-0.377	-0.330	-0.295	-0.295	-0.295
25 • 500	-0.673	-0.699	-0.343	-0.296	-0.265	-0.244	-0.241	-0.241	-0.241
26 • 625	-0.331	-0.607	-0.225	-0.197	-0.176	-0.167	-0.174	-0.174	-0.174
27 • 769	-0.056	-0.242	-0.075	-0.061	-0.046	-0.046	-0.064	-0.064	-0.064
28 • 915	0.088	-0.002	0.113	0.126	0.132	0.106	0.106	0.106	0.106
29 • 960	0.159	0.056	0.224	0.238	0.240	0.225	0.225	0.225	0.225

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN 18	RUN 237	RUN 18	RUN 238	RUN 18	RUN 239	RUN 18	RUN 240	RUN 18	RUN 241	RUN 18	RUN 242	RUN 18	RUN 243
	MU	MU	MU	MU	MU	MU	AU	AU	MU	MU	AU	AU	MU	MU
MU	0.75	0.75	0.75	0.75	0.75	0.75	0.70	0.70	0.75	0.75	0.70	0.70	0.75	0.75
AU	5.0	5.0	6.0	6.0	6.0	6.0	7.0	7.0	8.0	9.0	10.0	10.0	10.0	10.0
M	0.762	M	0.764	M	0.764	M	0.767	M	0.769	M	0.778	M	0.778	M
A	5.04	A	6.04	A	6.04	A	7.04	A	8.04	A	9.04	A	10.04	A
Q0	588.0	Q0	589.9	Q0	589.9	Q0	592.9	Q0	594.8	Q0	598.7	Q0	603.6	Q0
P0	1446.6	P0	1443.9	P0	1439.7	P0	1437.0	P0	1431.4	P0	1424.5	P0	1416.3	P0
CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP
1	0.977	0.923	0.867	0.805	0.756	0.717	0.664	0.614	0.736	0.717	0.612	0.575	0.532	0.432
2	0.008	0.304	-0.389	-0.485	-0.646	-0.814	-0.834	-0.928	-0.994	-1.032	-1.065	-1.032	-1.065	-1.065
3	0.017	U	-0.664	-0.753	-1.014	-1.130	-1.082	-1.130	-1.201	-1.251	-1.284	-1.284	-1.301	-1.301
4	0.040	U	-1.014	-1.241	-1.297	-1.297	-1.241	-1.297	-1.367	-1.400	-1.421	-1.421	-1.421	-1.421
5	0.065	U	-1.180	-1.215	-1.273	-1.273	-1.180	-1.273	-1.385	-1.403	-1.408	-1.408	-1.408	-1.408
6	0.090	U	-1.215	-1.248	-1.298	-1.298	-1.215	-1.298	-1.385	-1.410	-1.428	-1.428	-1.428	-1.428
7	0.130	U	-1.248	-1.315	-1.351	-1.351	-1.248	-1.315	-1.391	-1.440	-1.468	-1.468	-1.468	-1.468
8	0.168	U	-1.315	-1.373	-1.467	-1.467	-1.315	-1.467	-1.555	-1.679	-1.722	-1.722	-1.722	-1.722
9	0.233	U	-1.373	-1.425	-1.517	-1.517	-1.373	-1.425	-1.655	-1.920	-2.011	-2.011	-2.011	-2.011
10	0.335	U	-1.402	-1.427	-1.52	-1.52	-1.402	-1.427	-1.865	-2.065	-2.101	-2.101	-2.101	-2.101
11	0.500	U	-0.735	-0.759	-0.768	-0.768	-0.500	-0.759	-0.806	-0.849	-0.914	-0.914	-0.914	-0.914
12	0.625	U	-0.682	-0.727	-0.755	-0.755	-0.625	-0.727	-0.793	-0.849	-0.921	-0.921	-0.921	-0.921
13	0.769	U	-0.380	-0.535	-0.626	-0.626	-0.380	-0.535	-0.710	-0.813	-0.931	-0.931	-0.931	-0.931
14	0.915	U	-0.100	-0.275	-0.401	-0.401	-0.100	-0.275	-0.522	-0.667	-0.869	-0.869	-0.869	-0.869
15	0.960	U	-0.031	-0.201	-0.329	-0.440	-0.031	-0.201	-0.596	-0.816	-0.916	-0.916	-0.916	-0.916
16.	0.008	L	0.920	0.967	0.995	0.963	0.920	0.967	0.995	0.951	0.939	0.939	0.939	0.939
17	0.017	L	0.633	0.696	0.750	0.818	0.633	0.696	0.852	0.889	0.921	0.921	0.921	0.921
18	0.040	L	0.313	0.386	0.443	0.508	0.313	0.386	0.553	0.590	0.643	0.643	0.643	0.643
19	0.065	L	0.113	0.189	0.236	0.311	0.113	0.189	0.345	0.382	0.450	0.450	0.450	0.450
20	0.090	L	0.004	0.073	0.117	0.188	0.004	0.073	0.226	0.261	0.370	0.370	0.370	0.370
21	0.130	L	-0.133	-0.070	-0.028	0.039	-0.133	-0.070	0.079	0.106	0.250	0.250	0.250	0.250
22	0.168	L	-0.162	-0.106	-0.071	-0.014	-0.162	-0.106	0.020	0.044	0.120	0.120	0.120	0.120
23	0.233	L	-0.271	-0.225	-0.195	-0.142	-0.271	-0.225	0.099	0.182	0.250	0.250	0.250	0.250
24	0.335	L	-0.268	-0.244	-0.224	-0.198	-0.268	-0.244	0.191	0.182	0.490	0.490	0.490	0.490
25	0.500	L	-0.248	-0.253	-0.262	-0.264	-0.248	-0.253	0.277	0.288	0.341	0.341	0.341	0.341
26	0.625	L	-0.182	-0.196	-0.217	-0.232	-0.182	-0.196	0.258	0.287	0.216	0.216	0.216	0.216
27	0.769	L	-0.083	-0.125	-0.156	-0.168	-0.083	-0.125	0.236	0.282	0.072	0.072	0.072	0.072
28	0.915	L	0.076	0.017	-0.037	-0.080	0.076	0.017	0.127	0.171	0.122	0.122	0.122	0.122
29	0.960	L	0.193	0.135	0.081	0.050	0.193	0.135	0.007	0.025	0.227	0.227	0.227	0.227

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN 19 245	RUN 19 246	RUN 19 247	RUN 19 248	RUN 19 249	RUN 19 250	RUN 19 251
MU	0.80	MU	0.80	MU	0.80	MU	0.80
AU	0.	AU	-1.0	AU	-4.0	AU	1.0
M	0.810	M	0.811	M	0.816	M	0.811
A	0.	A	-1.00	A	-3.01	A	1.00
Q0	633.9	Q0	634.8	Q0	636.7	Q0	634.8
P0	1380.2	P0	1378.8	P0	1376.1	P0	1378.8
TAP X/C	CP						
1	1.152	1.148	1.132	1.127	1.1098	1.154	1.151
2	0.499	0.593	0.671	0.749	0.813	0.497	0.383
3	0.017	0.153	0.257	0.345	0.436	0.506	0.149
4	0.040	0.292	0.163	0.090	0.010	0.067	0.292
5	0.065	0.421	0.315	0.234	0.137	0.070	0.422
6	0.090	0.504	0.421	0.354	0.263	0.197	0.506
7	0.130	-0.557	-0.589	-0.561	-0.464	-0.402	-0.585
8	0.168	-0.693	-0.630	-0.513	-0.419	-0.368	-0.691
9	0.233	-0.809	-0.696	-0.637	-0.577	-0.526	-0.881
10	0.335	-0.868	-0.784	-0.726	-0.647	-0.597	-0.866
11	0.500	-0.908	-0.700	-0.685	-0.568	-0.635	-0.902
12	0.625	-0.209	-0.171	-0.206	-0.250	-0.324	-0.275
13	0.769	-0.017	-0.060	-0.108	-0.163	-0.212	-0.027
14	0.915	0.151	0.105	0.035	-0.019	-0.066	0.134
15	0.960	0.247	0.207	0.131	0.078	0.044	0.239
16	0.008	0.442	0.343	0.254	0.164	0.091	0.438
17	0.017	0.073	-0.038	-0.128	-0.235	-0.307	0.058
18	0.040	-0.233	-0.328	-0.401	-0.473	-0.539	-0.239
19	0.065	-0.453	-0.572	-0.640	-0.701	-0.764	-0.456
20	0.090	-0.520	-0.625	-0.708	-0.772	-0.821	-0.525
21	0.130	-0.661	-0.744	-0.804	-0.875	-0.926	-0.676
22	0.168	-0.715	-0.782	-0.844	-0.904	-0.952	-0.719
23	0.233	-0.826	-0.895	-0.942	-0.997	-1.037	-0.840
24	0.335	-0.864	-0.946	-0.989	-1.044	-1.081	-0.875
25	0.500	-0.946	-1.000	-0.773	-0.598	-0.640	-0.935
26	0.625	-0.314	-0.443	-0.455	-0.489	-0.531	-0.297
27	0.769	0.004	-0.322	-0.396	-0.453	-0.511	-0.009
28	0.915	0.155	-0.084	-0.264	-0.373	-0.452	0.149
29	0.960	0.246	0.000	-0.196	-0.309	-0.402	0.248

S-28 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN 19 252	RUN 19 253	RUN 19 254	RUN 19 255	RUN 19 256	RUN 19 257	RUN 19 258
MU	0.80	MU	0.80	MU	0.80	MU	0.80
AU	2.0	AU	3.0	AU	4.0	AU	5.0
M	0.813	M	0.815	M	0.818	M	0.821
A	2.01	A	3.01	A	4.02	A	5.02
Q	636.7	Q	638.5	Q	641.3	Q	644.0
P0	1376.1	P0	1373.3	P0	1369.1	P0	1365.0
TAP X/C	CP						
1 .000	1.144	1.136	1.121	1.090	1.156	1.153	1.148
2 .008	0.296	0.205	0.115	0.033	0.491	0.389	0.305
3 .017	-0.055	-0.144	-0.230	-0.302	0.142	0.037	-0.043
4 .040	-0.497	-0.565	-0.614	-0.663	-0.276	-0.379	-0.454
5 .065	-0.642	-0.710	-0.786	-0.847	-0.427	-0.546	-0.630
6 .090	-0.669	-0.752	-0.820	-0.883	-0.516	-0.563	-0.653
7 .130	-0.723	-0.789	-0.865	-0.930	-0.753	-0.692	-0.725
8 .168	-0.825	-0.888	-0.947	-0.999	-0.708	0.154	-0.810
9 .233	-0.932	-0.983	-1.038	-1.083	-0.813	-0.877	-0.921
10 .335	-0.987	-1.035	-1.084	-1.118	-0.880	-0.940	-0.978
11 .500	-0.831	-0.613	-0.544	-0.695	-0.980	-1.008	-0.872
12 .625	-0.438	-0.459	-0.495	-0.549	-0.312	-0.404	-0.435
13 .769	-0.398	-0.461	-0.511	-0.571	-0.022	-0.280	-0.382
14 .915	-0.216	-0.371	-0.475	-0.563	0.139	0.031	-0.204
15 .960	-0.139	-0.296	-0.410	-0.512	0.236	0.105	-0.123
16 .008 L	0.629	0.709	0.781	0.844	0.452	0.548	0.626
17 .017 L	0.272	0.369	0.457	0.534	0.088	0.193	0.277
18 .040 L	-0.036	0.057	0.145	0.217	-0.224	-0.124	-0.049
19 .065 L	-0.245	-0.150	-0.068	0.009	-0.441	-0.337	-0.250
20 .090 L	-0.344	-0.260	-0.173	-0.105	-0.516	-0.425	-0.348
21 .130 L	-0.538	-0.435	-0.339	-0.267	-0.654	-0.595	-0.544
22 .168 L	-0.495	-0.406	-0.342	-0.282	-0.705	-0.638	-0.507
23 .233 L	-0.654	-0.590	-0.528	-0.465	-0.819	-0.713	-0.656
24 .335 L	-0.714	-0.610	-0.464	-0.375	-0.855	-0.769	-0.719
25 .500 L	-0.644	-0.669	-0.709	-0.710	-0.935	-0.748	-0.701
26 .625 L	-0.173	-0.213	-0.330	-0.643	-0.336	-0.149	-0.171
27 .769 L	-0.071	-0.118	-0.166	-0.219	-0.013	-0.019	-0.064
28 .915 L	0.084	0.016	-0.041	-0.081	0.151	0.155	0.086
29 .960 L	0.179	0.111	0.065	0.019	0.245	0.256	0.173

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS

	RUN 19 259	RUN 19 260	RUN 19 261	RUN 19 262
MU	0.80	MU	0.80	MU
AU	3.0	AU	4.0	AU
M	0.816	M	0.818	M
A	3.01	A	4.02	A
00	639.4	00	641.3	00
P0	1371.9	P0	1369.1	P0
			1363.6	P0
				1380.2
TAP X/C	CP	CP	CP	CP
1	•000	1•140	1•120	1•095
2	•008	0•204	0•118	0•051
3	•017	0•140	-0•226	-0•287
4	•040	0•535	-0•606	-0•645
5	•065	0•710	-0•786	-0•834
6	•090	0•756	-0•820	-0•869
7	•130	0•800	-0•866	-0•905
8	•168	0•886	-0•946	-0•985
9	•233	0•985	-1•042	-1•072
10	•335	0•1039	-1•086	-1•103
11	•500	0•615	-0•589	-0•799
12	•625	0•467	-0•502	-0•564
13	•769	0•466	-0•512	-0•559
14	•915	0•380	-0•471	-0•553
15	•960	0•301	-0•405	-0•503
16	•008	L 0•709	0•778	0•832
17	•017	L 0•387	0•463	0•530
18	•040	L 0•061	0•142	0•213
19	•065	L 0•146	-0•068	0•001
20	•090	L 0•254	-0•180	-0•112
21	•130	L 0•429	-0•340	-0•274
22	•168	L 0•399	-0•345	-0•287
23	•233	L 0•583	-0•529	-0•471
24	•335	L 0•601	-0•466	-0•393
25	•500	L 0•679	-0•716	-0•704
26	•625	L 0•224	-0•318	-0•640
27	•769	L 0•118	-0•164	-0•271
28	•915	L 0•020	-0•038	-0•075
29	•960	L 0•114	0•068	0•010

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS										3° TAB DEFLECTION										
RUN	30	365	RUN	30	366	RUN	30	367	RUN	30	368	RUN	30	369	RUN	30	370	RUN	30	371
MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	
AU	0.	AU	-2.0	AU	0.	AU	2.0	AU	4.0	AU	6.0	AU	8.0	AU	8.0	AU	8.0	AU	8.0	
M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	M	0.301	
A	0.	A	-2.01	A	0.	A	2.01	A	4.03	A	6.04	A	8.05	A	8.05	A	8.05	A	8.05	
QO	126.5	QO	126.5	QO	126.5	QO	126.5	QO	126.5	QO	126.5	QO	126.5	QO	126.5	QO	126.5	QO	126.5	
PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	PO	1994.6	
TAP	X/C	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	CP	
1	.000	0.959	0.799	0.948	0.905	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	0.570	
2	.008	U	0.207	0.638	0.292	-0.311	-1.136	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	-2.214	
3	.017	U	-0.089	0.391	-0.040	-0.608	-1.287	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	-2.167	
4	.040	U	-0.474	-0.089	-0.400	-0.851	-1.330	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	-1.938	
5	.065	U	-0.495	-0.192	-0.418	-0.770	-1.153	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	-1.525	
6	.090	U	-0.517	-0.263	-0.463	-0.720	-1.033	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	-1.363	
7	.130	U	-0.584	-0.337	-0.439	-0.636	-0.892	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	-1.123	
8	.168	U	-0.474	-0.326	-0.439	-0.624	-0.782	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	-1.013	
9	.233	U	-0.495	-0.337	-0.414	-0.575	-0.711	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	-0.861	
10	.335	U	-0.375	-0.284	-0.368	-0.431	-0.549	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	-0.646	
11	.500	U	-0.344	-0.270	-0.266	-0.32	-0.369	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	-0.462	
12	.625	U	-0.266	-0.228	-0.167	-0.244	-0.274	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	-0.390	
13	.769	U	-0.097	-0.094	-0.054	-0.110	-0.129	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	-0.160	
14	.915	U	-0.019	-0.026	0.010	-0.007	-0.013	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	-0.009	
15	.960	U	0.105	0.115	0.140	0.123	0.124	0.086	0.086	0.086	0.086	0.086	0.086	0.086	0.086	0.086	0.086	0.086	0.086	
16	.006	L	-0.036	-0.664	-0.047	0.423	0.423	0.779	0.882	0.882	0.882	0.882	0.882	0.882	0.882	0.882	0.882	0.882	0.882	
17	.017	L	-0.393	-0.946	-0.389	0.066	0.066	0.518	0.758	0.758	0.758	0.758	0.758	0.758	0.758	0.758	0.758	0.758	0.758	
18	.040	L	-0.548	-0.932	-0.587	-0.186	-0.186	0.165	0.444	0.444	0.444	0.444	0.444	0.444	0.444	0.444	0.444	0.444	0.444	
19	.065	L	-0.668	-0.935	-0.696	-0.375	-0.375	-0.019	0.124	0.124	0.124	0.124	0.124	0.124	0.124	0.124	0.124	0.124	0.124	
20	.090	L	-0.640	-0.875	-0.661	-0.375	-0.375	-0.082	0.140	0.140	0.140	0.140	0.140	0.140	0.140	0.140	0.140	0.140	0.140	
21	.130	L	-0.636	-0.829	-0.647	-0.421	-0.421	-0.153	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	
22	.168	L	-0.573	-0.712	-0.594	-0.421	-0.421	-0.210	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	-0.012	
23	.233	L	-0.558	-0.659	-0.583	-0.425	-0.425	-0.266	-0.079	-0.079	-0.079	-0.079	-0.079	-0.079	-0.079	-0.079	-0.079	-0.079	-0.079	
24	.335	L	-0.435	-0.532	-0.452	-0.337	-0.337	-0.185	-0.069	-0.069	-0.069	-0.069	-0.069	-0.069	-0.069	-0.069	-0.069	-0.069	-0.069	
25	.500	L	-0.332	-0.416	-0.375	-0.280	-0.280	-0.182	-0.108	-0.108	-0.108	-0.108	-0.108	-0.108	-0.108	-0.108	-0.108	-0.108	-0.108	
26	.625	L	-0.301	-0.317	-0.325	-0.255	-0.255	-0.185	-0.136	-0.136	-0.136	-0.136	-0.136	-0.136	-0.136	-0.136	-0.136	-0.136	-0.136	
27	.769	L	-0.151	-0.208	-0.161	-0.142	-0.142	-0.072	-0.048	-0.048	-0.048	-0.048	-0.048	-0.048	-0.048	-0.048	-0.048	-0.048	-0.048	
28	.915	L	-0.043	-0.056	-0.068	-0.065	-0.065	-0.012	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	-0.006	
29	.960	L	0.020	0.000	-0.001	0.001	0.001	0.024	0.066	0.066	0.066	0.066	0.066	0.066	0.066	0.066	0.066	0.066	0.066	

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS¹ TAP IDENTIFICATION

	RUN 30	372	RUN 30	373	RUN 30	374	RUN 30	375	RUN 30	376	RUN 29	352	RUN 29	353
MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.30	MU	0.40	MU	0.40	
AU	10.0	AU	12.0	AU	14.0	AU	16.0	AU	0.0	AU	0.0	AU	-2.0	
M	0.301	M	0.301	M	0.302	M	0.303	M	0.301	M	0.401	M	0.401	
A	10.06	A	12.07	A	14.07	A	16.05	A	0.0	A	0.0	A	-2.02	
Q	126.5	Q	126.5	Q	127.3	Q	128.1	Q	126.5	Q	214.0	Q	214.0	
P0	1994.6	P0	1994.6	P0	1993.8	P0	1993.0	P0	1994.6	P0	1901.3	P0	1901.3	
TAP X/C		CP		CP		CP		CP		CP		CP		
1 .000	-2.0600	-3.906	-4.832	-2.674	0.930	1.009	0.830							
2 .008	-4.798	-6.120	-7.155	-3.682	0.190	0.331	0.703							
3 .017	-4.231	-5.599	-6.411	-2.855	-0.089	-0.009	0.414							
4 .040	-3.192	-3.728	-4.042	-1.701	-0.478	-0.353	0.005							
5 .065	-2.389	-2.751	-2.976	-1.042	-0.502	-0.405	-0.118							
6 .090	-2.061	-2.336	-2.475	-0.802	-0.534	-0.440	-0.213							
7 .130	-1.610	-1.850	-1.956	-1.058	-0.605	-0.465	-0.309							
8 .168	-1.423	-1.562	-1.669	-0.708	-0.524	-0.434	-0.264							
9 .233	-1.159	-1.270	-1.304	-0.731	-0.524	-0.411	-0.293							
10 .335	-0.863	-0.911	-0.950	-0.745	-0.390	-0.328	-0.233							
11 .500	-0.567	-0.581	-0.582	-0.759	-0.347	-0.247	-0.206							
12 .625	-0.363	-0.402	-0.390	-0.759	-0.273	-0.157	-0.166							
13 .769	-0.167	-0.174	-0.219	-0.725	-0.111	-0.074	-0.047							
14 .915	0.001	-0.035	-0.035	-0.598	-0.022	0.089	0.090							
15 .960	0.057	0.034	-0.015	-0.547	0.119	0.214	0.212							
16 .008	0.829	0.569	0.364	0.651	0.066	0.085	0.056							
17 .017	0.928	0.928	0.914	0.922	-0.111	-0.278	-0.947							
18 .040	0.779	0.868	0.886	0.915	-0.485	-0.463	-0.926							
19 .065	0.624	0.716	0.833	0.776	-0.576	-0.540	-0.947							
20 .090	0.472	0.571	0.654	0.647	-0.569	-0.552	-0.870							
21 .130	0.348	0.441	0.523	0.511	-0.555	-0.561	-0.826							
22 .168	0.299	0.381	0.421	0.413	-0.520	-0.513	-0.717							
23 .233	0.193	0.243	0.323	0.288	-0.513	-0.496	-0.680							
24 .335	0.129	0.183	0.213	0.176	-0.438	-0.413	-0.532							
25 .500	0.058	0.112	0.104	0.040	-0.336	-0.315	-0.394							
26 .625	-0.013	-0.025	0.013	-0.015	-0.234	-0.225	-0.280							
27 .769	0.037	0.024	0.048	-0.084	-0.110	-0.098	-0.161							
28 .915	0.038	0.029	0.029	-0.142	-0.022	0.031	0.011							
29 .960	0.092	0.072	0.089	-0.179	0.070	0.091	0.063							

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS, 3° TAB DEFLECTION											
	RUN 29	354	RUN 29	355	RUN 29	356	RUN 29	357	RUN 29	358	
MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU	0.40	RUN 29	359
AU	-4.0	AU	0.	AU	2.0	AU	4.0	AU	6.0	MU	0.40
M	0.401	M	0.401	M	0.401	M	0.401	M	0.401	AU	10.0
A	-4.03	A	0.	A	2.01	A	4.03	A	6.04	M	0.402
Q0	214.0	Q0	214.0	Q0	214.0	Q0	214.0	Q0	214.0	A	10.07
P0	1901.3	P0	1901.3	P0	1901.3	P0	1901.3	P0	1901.3	Q0	215.0
TAP X/C	CP										
1	0.000	0.276	1.001	0.978	0.596	-0.139	-1.057	-1.057	-1.065		
2	0.008	0.947	0.328	-0.269	-1.151	-2.279	-3.610	-5.006	-5.006		
3	0.017	0.741	-0.013	-0.581	-1.332	-2.266	-3.319	-4.657	-4.657		
4	0.040	0.326	-0.357	-0.827	-1.363	-2.012	-2.667	-3.080	-3.080		
5	0.065	0.153	-0.407	-0.756	-1.175	-1.608	-2.056	-2.436	-2.436		
6	0.090	0.053	-0.449	-0.727	-1.079	-1.441	-1.783	-2.085	-2.085		
7	0.130	-0.112	-0.430	-0.623	-0.917	-1.199	-1.442	-1.641	-1.641		
8	0.168	-0.093	-0.422	-0.595	-0.802	-1.047	-1.248	-1.431	-1.431		
9	0.233	-0.143	-0.405	-0.543	-0.731	-0.912	-1.038	-1.173	-1.173		
10	0.335	-0.123	-0.315	-0.427	-0.558	-0.662	-0.763	-0.857	-0.857		
11	0.500	-0.138	-0.234	-0.306	-0.396	-0.464	-0.514	-0.556	-0.556		
12	0.625	-0.119	-0.161	-0.204	-0.250	-0.315	-0.331	-0.353	-0.353		
13	0.769	0.000	-0.053	-0.089	-0.119	-0.144	-0.163	-0.173	-0.173		
14	0.915	0.097	0.085	0.085	0.072	0.054	0.045	0.008	0.008		
15	0.960	0.234	0.201	0.200	0.163	0.116	0.101	0.055	0.055		
16	0.008	L	-1.614	0.031	0.541	0.841	0.953	0.976	0.916		
17	0.017	L	-1.783	-0.313	0.201	0.593	0.816	0.947	0.981		
18	0.040	L	-1.520	-0.509	-0.103	0.253	0.508	0.718	0.839		
19	0.065	L	-1.345	-0.613	-0.269	0.045	0.289	0.512	0.641		
20	0.090	L	-1.226	-0.606	-0.311	-0.049	0.174	0.387	0.525		
21	0.130	L	-1.076	-0.579	-0.340	-0.130	0.053	0.243	0.394		
22	0.168	L	-0.926	-0.548	-0.317	-0.157	0.024	0.161	0.291		
23	0.233	L	-0.832	-0.529	-0.359	-0.203	-0.056	0.069	0.183		
24	0.335	L	-0.651	-0.421	-0.286	-0.168	-0.060	0.046	0.122		
25	0.500	L	-0.457	-0.325	-0.228	-0.152	-0.077	0.002	0.061		
26	0.625	L	-0.309	-0.269	-0.207	-0.135	-0.085	-0.027	0.001		
27	0.769	L	-0.176	-0.131	-0.091	-0.045	-0.014	0.025	0.041		
28	0.915	L	0.008	0.024	0.032	0.051	0.070	0.086	0.115		
29	0.960	L	0.060	0.079	0.108	0.110	0.118	0.131	0.115		

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS^{3°} TAB DEFLECTION

	RUN 29	361	RUN 29	362	RUN 29	363	RUN 29	364	RUN 25	304	RUN 25	305	RUN 25	306
MU	0.40	MU	0.40	MU	0.40	MU	0.40	MU	0.50	MU	0.50	MU	0.50	MU
AU	12.0	AU	14.0	AU	16.0	AU	0.	AU	0.	AU	-2.0	AU	0.	AU
M	0.402	M	0.405	M	0.407	M	0.401	M	0.502	M	0.502	M	0.502	M
A	12.07	A	14.06	A	16.04	A	0.	A	0.	A	-2.02	A	0.	A
Q0	215.0	Q0	217.8	Q0	219.7	Q0	214.0	Q0	315.4	Q0	315.4	Q0	315.4	Q0
P0	1900.2	P0	1897.1	P0	1895.0	P0	1901.3	P0	1788.2	P0	1788.2	P0	1788.2	P0
TAP X/C														
1	•000	CP	•2.491	CP	•1.191	CP	•1.294	CP	•0.003	CP	•0.044	CP	•0.038	CP
2	•008	U	•2.269	U	•1.386	U	•1.793	U	•0.266	U	•0.357	U	•0.354	U
3	•017	U	•5.105	U	•1.320	U	•1.383	U	•0.042	U	•0.004	U	•0.011	U
4	•040	U	•3.690	U	•1.183	U	•1.023	U	•0.444	U	•0.372	U	•0.355	U
5	•065	U	•2.765	U	•1.152	U	•0.927	U	•0.421	U	•0.411	U	•0.402	U
6	•090	U	•2.274	U	•1.125	U	•0.886	U	•0.452	U	•0.457	U	•0.449	U
7	•130	U	•1.795	U	•1.149	U	•0.912	U	•0.548	U	•0.467	U	•0.445	U
8	•164	U	•1.507	U	•1.079	U	•0.855	U	•0.444	U	•0.435	U	•0.421	U
9	•233	U	•1.205	U	•0.974	U	•0.838	U	•0.429	U	•0.425	U	•0.415	U
10	•335	U	•0.865	U	•0.894	U	•0.640	U	•0.534	U	•0.333	U	•0.330	U
11	•500	U	•0.559	U	•0.779	U	•0.837	U	•0.296	U	•0.258	U	•0.240	U
12	•625	U	•0.348	U	•0.681	U	•0.803	U	•0.209	U	•0.173	U	•0.165	U
13	•769	U	•0.198	U	•0.565	U	•0.727	U	•0.092	U	•0.053	U	•0.057	U
14	•915	U	•0.086	U	•0.415	U	•0.594	U	•0.008	U	•0.009	U	•0.100	U
15	•960	U	•0.058	U	•0.356	U	•0.538	U	•0.175	U	•0.216	U	•0.217	U
16	•008	L	•0.788	L	•0.871	L	•0.863	L	•0.083	L	•0.104	L	•0.082	L
17	•017	L	•0.971	L	•0.990	L	•0.987	L	•0.265	L	•0.279	L	•0.293	L
18	•040	L	•0.887	L	•0.914	L	•0.893	L	•0.449	L	•0.451	L	•0.494	L
19	•065	L	•0.703	L	•0.743	L	•0.726	L	•0.557	L	•0.584	L	•0.597	L
20	•090	L	•0.599	L	•0.613	L	•0.610	L	•0.557	L	•0.598	L	•0.604	L
21	•130	L	•0.453	L	•0.465	L	•0.469	L	•0.557	L	•0.585	L	•0.601	L
22	•168	L	•0.376	L	•0.393	L	•0.389	L	•0.517	L	•0.529	L	•0.544	L
23	•233	L	•0.239	L	•0.270	L	•0.261	L	•0.493	L	•0.518	L	•0.539	L
24	•335	L	•0.164	L	•0.177	L	•0.158	L	•0.401	L	•0.418	L	•0.416	L
25	•500	L	•0.078	L	•0.061	L	•0.028	L	•0.309	L	•0.305	L	•0.309	L
26	•625	L	•0.012	L	•0.004	L	•0.037	L	•0.228	L	•0.222	L	•0.236	L
27	•769	L	•0.029	L	•0.024	L	•0.085	L	•0.105	L	•0.104	L	•0.118	L
28	•915	L	•0.059	L	•0.068	L	•0.151	L	•0.030	L	•0.023	L	•0.027	L
29	•960	L	•0.097	L	•0.053	L	•0.169	L	•0.083	L	•0.109	L	•0.098	L

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° TAB DEFLECTION

		RUN 25	307	RUN 25	308	RUN 25	309	RUN 25	310	RUN 25	311	RUN 25	312	RUN 25	313
MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50	MU	0.50
AU	2.0	AU	4.0	AU	6.0	AU	8.0	AU	10.0	AU	12.0	AU	14.0	AU	14.0
M	0.502	M	0.502	M	0.502	M	0.502	M	0.502	M	0.502	M	0.502	M	0.502
A	2.01	A	4.03	A	6.05	A	8.06	A	10.07	A	12.06	A	14.05	A	14.05
Q0	315.4	Q0	315.4	Q0	315.4	Q0	315.4	Q0	317.5	Q0	319.6	Q0	321.7	Q0	321.7
P0	1788.2	P0	1788.2	P0	1788.2	P0	1788.2	P0	1788.2	P0	1788.2	P0	1788.2	P0	1788.2
TAP X/C		CP													
1 • 000	1.001	0.654	0.072	-0.246	-2.448	-2.231	-1.473	-1.267	-1.769	-2.715	-1.530	-1.743	-2.237	-0.505	-0.924
2 • 008	U	-0.250	-1.116	-1.382	-1.166	-1.116	-0.854	-0.782	-0.773	-1.159	-1.247	-1.495	-1.495	-3.049	-2.447
3 • 017	U	-0.570	-1.382	-1.473	-1.473	-1.473	-0.854	-0.854	-0.854	-0.854	-0.854	-0.854	-0.854	-3.470	-3.470
4 • 040	U	-0.637	-0.869	-0.869	-0.869	-0.869	-0.583	-0.583	-0.583	-0.583	-0.583	-0.583	-0.583	-3.346	-3.346
5 • 065	U	-0.782	-0.762	-0.762	-0.762	-0.762	-0.443	-0.443	-0.443	-0.443	-0.443	-0.443	-0.443	-2.715	-2.715
6 • 090	U	-0.773	-1.159	-1.159	-1.159	-1.159	-0.312	-0.312	-0.312	-0.312	-0.312	-0.312	-0.312	-1.769	-1.769
7 • 130	U	-0.666	-0.950	-0.950	-0.950	-0.950	-0.213	-0.213	-0.213	-0.213	-0.213	-0.213	-0.213	-1.267	-1.267
8 • 168	U	-0.637	-0.869	-0.869	-0.869	-0.869	-0.084	-0.084	-0.084	-0.084	-0.084	-0.084	-0.084	-1.116	-1.116
9 • 233	U	-0.583	-0.762	-0.762	-0.762	-0.762	-0.043	-0.043	-0.043	-0.043	-0.043	-0.043	-0.043	-0.762	-0.762
10 • 335	U	-0.443	-0.573	-0.573	-0.573	-0.573	-0.312	-0.312	-0.312	-0.312	-0.312	-0.312	-0.312	-0.573	-0.573
11 • 500	U	-0.312	-0.387	-0.387	-0.387	-0.387	-0.213	-0.213	-0.213	-0.213	-0.213	-0.213	-0.213	-0.384	-0.384
12 • 625	U	-0.213	-0.259	-0.259	-0.259	-0.259	-0.084	-0.084	-0.084	-0.084	-0.084	-0.084	-0.084	-0.259	-0.259
13 • 769	U	-0.084	-0.105	-0.105	-0.105	-0.105	-0.091	-0.091	-0.091	-0.091	-0.091	-0.091	-0.091	-0.105	-0.105
14 • 915	U	0.091	0.080	0.080	0.080	0.080	0.199	0.199	0.199	0.199	0.199	0.199	0.199	0.080	0.080
15 • 960	U	0.199	0.177	0.177	0.177	0.177	0.213	0.213	0.213	0.213	0.213	0.213	0.213	0.177	0.177
16 • 008	L	0.579	0.899	0.899	0.899	0.899	0.616	0.616	0.616	0.616	0.616	0.616	0.616	0.899	0.899
17 • 017	L	0.220	0.220	0.220	0.220	0.220	0.344	0.344	0.344	0.344	0.344	0.344	0.344	0.220	0.220
18 • 040	L	-0.054	0.275	0.275	0.275	0.275	0.552	0.552	0.552	0.552	0.552	0.552	0.552	0.275	0.275
19 • 065	L	-0.246	0.072	0.072	0.072	0.072	0.333	0.333	0.333	0.333	0.333	0.333	0.333	0.072	0.072
20 • 090	L	-0.285	-0.019	-0.019	-0.019	-0.019	0.212	0.212	0.212	0.212	0.212	0.212	0.212	0.285	0.285
21 • 130	L	-0.344	-0.102	-0.102	-0.102	-0.102	0.097	0.097	0.097	0.097	0.097	0.097	0.097	0.344	0.344
22 • 168	L	-0.307	-0.131	-0.131	-0.131	-0.131	0.056	0.056	0.056	0.056	0.056	0.056	0.056	0.307	0.307
23 • 233	L	-0.364	-0.199	-0.199	-0.199	-0.199	0.036	0.036	0.036	0.036	0.036	0.036	0.036	0.364	0.364
24 • 335	L	-0.295	-0.177	-0.177	-0.177	-0.177	0.049	0.049	0.049	0.049	0.049	0.049	0.049	0.295	0.295
25 • 500	L	-0.225	-0.140	-0.140	-0.140	-0.140	0.051	0.051	0.051	0.051	0.051	0.051	0.051	0.225	0.225
26 • 625	L	-0.176	-0.121	-0.121	-0.121	-0.121	0.064	0.064	0.064	0.064	0.064	0.064	0.064	0.176	0.176
27 • 769	L	-0.087	-0.056	-0.056	-0.056	-0.056	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.087	0.087
28 • 915	L	0.030	0.063	0.063	0.063	0.063	0.064	0.064	0.064	0.064	0.064	0.064	0.064	0.030	0.030
29 • 960	L	0.117	0.116	0.116	0.116	0.116	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.117	0.117

1958 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° TAB DEFLECTION

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° TAB DEFLECTION

	RUN 26	321	RUN 26	322	RUN 26	323	RUN 23	324	RUN 26	325	RUN 26	326	RUN 26	327
MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60	MU	0.60	
AU	6.0	AU	8.0	AU	10.0	AU	12.0	AU	14.0	AU	16.0	AU	0	
M	0.603	M	0.605	M	0.608	M	0.611	M	0.614	M	0.617	M	0.602	
A	6.06	A	8.07	A	10.06	A	12.05	A	14.05	A	16.04	A	0	
Q0	422.8	Q0	425.0	Q0	428.2	Q0	431.4	Q0	434.6	Q0	437.8	Q0	421.8	
P0	1661.3	P0	1658.7	P0	1654.8	P0	1650.8	P0	1646.9	P0	1642.9	P0	1662.6	
TAP X/C	CP													
1 0.000	0.396	0.126	-0.049	-0.168	-0.274	-0.444	-0.559	-0.684	-0.813	-0.944	-1.068	-1.198	-1.378	
2 0.008	0.233	-1.587	-1.964	-2.118	-2.005	-1.441	-1.482	-1.222	-1.222	-1.222	-1.222	-1.222	-0.024	
3 0.017	0.233	-1.940	-2.262	-2.348	-2.922	-1.498	-1.639	-1.205	-1.205	-1.205	-1.205	-1.205	-0.442	
4 0.040	0.233	-2.244	-2.530	-2.187	-2.048	-1.314	-1.850	-1.267	-1.267	-1.267	-1.267	-1.267	-0.446	
5 0.065	0.233	-2.318	-2.611	-2.845	-2.145	-1.267	-1.837	-1.267	-1.267	-1.267	-1.267	-1.267	-0.490	
6 0.090	0.233	-2.256	-2.522	-2.645	-2.173	-1.234	-1.921	-1.234	-1.234	-1.234	-1.234	-1.234	-0.514	
7 0.130	0.233	-1.682	-2.173	-2.612	-2.173	-1.144	-1.724	-1.144	-1.144	-1.144	-1.144	-1.144	-0.487	
8 0.168	0.233	-1.240	-1.404	-1.341	-1.130	-0.649	-0.916	-0.649	-0.649	-0.649	-0.649	-0.649	-0.470	
9 0.233	0.233	-0.670	-1.477	-1.130	-0.714	-0.896	-0.916	-0.896	-0.896	-0.896	-0.896	-0.896	-0.365	
10 0.335	0.233	-0.672	-0.672	-0.714	-0.625	-0.673	-0.714	-0.625	-0.625	-0.625	-0.625	-0.625	-0.217	
11 0.500	0.233	-0.456	-0.471	-0.471	-0.471	-0.625	-0.729	-0.625	-0.625	-0.625	-0.625	-0.625	-0.206	
12 0.625	0.233	-0.294	-0.316	-0.478	-0.478	-0.636	-0.736	-0.636	-0.636	-0.636	-0.636	-0.636	-0.063	
13 0.769	0.233	-0.112	-0.151	-0.364	-0.364	-0.423	-0.560	-0.423	-0.423	-0.423	-0.423	-0.423	-0.095	
14 0.915	0.233	0.080	0.010	0.256	0.256	-0.440	-0.560	-0.440	-0.440	-0.440	-0.440	-0.440	-0.24	
15 0.960	0.233	0.157	0.050	0.252	0.252	-0.392	-0.493	-0.392	-0.392	-0.392	-0.392	-0.392	-0.158	
16 0.008	0.966	0.950	0.950	0.951	0.951	0.944	0.933	0.944	0.944	0.944	0.944	0.944	-0.229	
17 0.017	0.861	0.949	0.949	0.994	0.994	0.982	0.955	0.982	0.982	0.982	0.982	0.982	-0.642	
18 0.040	0.557	0.607	0.746	0.795	0.795	0.867	0.905	0.867	0.867	0.867	0.867	0.867	-0.580	
19 0.065	0.336	0.459	0.537	0.614	0.614	0.687	0.743	0.687	0.687	0.687	0.687	0.687	-0.571	
20 0.090	0.233	0.230	0.336	0.423	0.423	0.485	0.669	0.485	0.485	0.485	0.485	0.485	-0.459	
21 0.130	0.107	0.107	0.218	0.209	0.209	0.349	0.423	0.349	0.349	0.349	0.349	0.349	-0.338	
22 0.168	0.069	0.154	0.217	0.273	0.273	0.394	0.469	0.394	0.394	0.394	0.394	0.394	-0.239	
23 0.233	0.042	0.048	0.100	0.132	0.132	0.214	0.239	0.214	0.214	0.214	0.214	0.214	-0.103	
24 0.335	-0.063	-0.063	-0.066	0.020	0.020	0.074	0.125	0.074	0.074	0.074	0.074	0.074	-0.042	
25 0.500	-0.000	-0.000	-0.035	-0.035	-0.035	-0.031	0.020	-0.031	-0.031	-0.031	-0.031	-0.031	-0.098	
26 0.625	-0.051	-0.043	-0.070	-0.083	-0.083	-0.154	-0.200	-0.154	-0.154	-0.154	-0.154	-0.154	-0.237	
27 0.769	0.006	-0.002	-0.055	-0.096	-0.096	-0.177	-0.239	-0.177	-0.177	-0.177	-0.177	-0.177	-0.237	
28 0.915	0.093	0.079	0.036	0.036	0.036	0.125	0.125	0.036	0.036	0.036	0.036	0.036	0.098	
29 0.960	0.154	0.125	0.025	-0.103	-0.103	-0.144	-0.144	-0.103	-0.103	-0.103	-0.103	-0.103	-0.098	

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° TAB DEFLECTION

	RUN 27	328	RUN 27	329	RUN 27	330	RUN 27	331	RUN 27	332	RUN 27	333	RUN 27	334
MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU	0.70	MU
AU	0.	AU	-2.0	AU	0.	AU	2.0	AU	4.0	AU	6.0	AU	8.0	AU
M	0.704	M	0.704	M	0.704	M	0.704	M	0.706	M	0.708	M	0.712	M
A	0.	A	-2.03	A	0.	A	2.02	A	4.05	A	6.06	A	8.06	A
Q	529.3	Q	529.3	Q	529.3	Q	529.3	Q	531.4	Q	533.5	Q	537.6	Q
P0	1525.8	P0	1525.8	P0	1525.8	P0	1525.8	P0	1523.0	P0	1520.3	P0	1514.8	P0
TAP X/C	CP	CP	CP	CP	CP	CP	CP	CP						
1 • 000	1•114	1•019	1•116	1•092	0•946	0•762	0•616							
2 • 008	0•456	0•790	0•461	-0•045	-0•446	-0•768	-1•048							
3 • 017	0•093	0•479	0•106	-0•427	-0•837	-1•139	-1•342							
4 • 040	-0•426	0•004	-0•419	-0•997	-1•278	-1•474	-1•627							
5 • 065	-0•454	-0•086	-0•447	-1•030	-1•378	-1•610	-1•731							
6 • 090	-0•540	-0•187	-0•528	-0•975	-1•405	-1•624	-1•733							
7 • 130	-0•604	-0•368	-0•567	-0•906	-1•328	-1•649	-1•631							
8 • 168	-0•553	-0•066	-0•542	-1•095	-1•480	-1•693	-1•413							
9 • 233	-0•549	-0•329	-0•541	-0•826	-1•536	-1•731	-1•167							
10 • 335	-0•413	-0•274	-0•411	-0•547	-0•814	-1•107	-1•005							
11 • 500	-0•283	-0•209	-0•279	-0•367	-0•351	-0•421	-0•742							
12 • 625	-0•189	-0•146	-0•184	-0•240	-0•250	-0•258	-0•523							
13 • 769	-0•052	-0•023	-0•047	-0•081	-0•096	-0•123	-0•325							
14 • 915	0•130	0•134	0•144	0•121	0•101	0•029	-0•182							
15 • 960	0•258	0•265	0•266	0•231	0•225	0•109	-0•148							
16 • 008	0•249	-0•243	0•242	0•631	0•906	0•987	0•954							
17 • 017	-0•152	-0•657	-0•163	0•303	0•613	0•770	0•874							
18 • 040	-0•463	-0•912	-0•470	-0•019	0•286	0•471	0•571							
19 • 065	-0•642	-1•169	-0•643	-0•211	0•091	0•258	0•374							
20 • 090	-0•709	-1•204	-0•711	-0•305	-0•020	0•139	0•257							
21 • 130	-0•800	-1•271	-0•806	-0•404	-0•135	0•007	0•114							
22 • 168	-0•695	-1•256	-0•700	-0•379	-0•157	-0•034	0•062							
23 • 233	-0•697	-1•302	-0•707	-0•439	-0•243	-0•139	-0•057							
24 • 335	-0•519	-0•550	-0•513	-0•369	-0•231	-0•169	-0•113							
25 • 500	-0•375	-0•436	-0•373	-0•268	-0•182	-0•162	-0•136							
26 • 625	-0•252	-0•300	-0•256	-0•195	-0•137	-0•135	-0•147							
27 • 769	-0•106	-0•134	-0•107	-0•076	-0•038	-0•068	-0•105							
28 • 915	0•067	0•056	0•064	0•073	0•092	0•060	-0•031							
29 • 960	L	0•139	0•123	0•131	0•140	0•157	0•118							

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° TAB DEFLECTION

		RUN 27 335	RUN 27 336	RUN 27 337	RUN 27 338	RUN 27 339	RUN 28 340	RUN 28 341
TAP	X/C	MU						
1	.000	0.469	CP	CP	CP	CP	CP	CP
2	.008	-1.269	-1.433	0.334	0.211	0.038	1.107	1.145
3	.017	-1.461	-1.511	-1.631	-1.534	-1.554	0.449	0.512
4	.040	-1.631	-1.345	-1.125	-0.835	-1.709	0.080	0.170
5	.065	-1.551	-1.149	-1.094	-0.820	-1.330	-0.471	-0.395
6	.090	-1.454	-1.094	-1.096	-0.883	-1.273	-0.458	-0.404
7	.130	-1.418	-1.096	-0.917	-0.797	-1.235	-0.545	-0.492
8	.168	-1.181	-0.917	-0.792	-0.792	-1.049	-0.656	-0.469
9	.233	-1.020	-0.872	-0.770	-0.796	-1.049	-0.562	-0.683
10	.335	-0.886	-0.828	-0.799	-0.799	-1.024	-0.421	-0.852
11	.500	-0.772	-0.808	-0.809	-0.809	-0.971	-0.298	-0.655
12	.625	-0.690	-0.792	-0.834	-0.834	-0.969	-0.204	-0.114
13	.769	-0.590	-0.770	-0.849	-0.978	-1.04	-0.546	-0.795
14	.915	-0.477	-0.688	-0.819	-0.960	-1.024	-0.421	-0.852
15	.960	-0.426	-0.633	-0.783	-0.930	-0.971	-0.298	-0.613
16	.008	0.929	0.918	0.914	0.916	-0.969	-0.204	-0.114
17	.017	0.952	0.994	0.968	0.935	-0.978	-0.060	-0.001
18	.040	0.679	0.746	0.801	0.876	-0.849	-0.465	-0.243
19	.065	0.474	0.539	0.608	0.686	-0.644	-0.463	-0.096
20	.090	0.342	0.422	0.484	0.561	-0.704	-0.526	-0.216
21	.130	0.199	0.277	0.336	0.419	-0.801	-0.668	-0.042
22	.168	0.137	0.205	0.261	0.339	-0.693	-0.724	-0.329
23	.233	0.003	0.063	0.111	0.181	-0.701	-0.832	-0.776
24	.335	-0.082	-0.039	-0.006	0.054	-0.525	-0.880	-0.894
25	.500	-0.131	-0.113	-0.103	-0.054	-0.375	-0.970	-1.000
26	.625	-0.171	-0.184	-0.193	-0.169	-0.256	-0.609	-0.450
27	.769	-0.161	-0.211	-0.243	-0.234	-0.108	-0.247	-0.401
28	.915	-0.140	-0.221	-0.275	-0.278	0.059	0.066	-0.251
29	.960	-0.113	-0.199	-0.248	-0.241	0.132	0.133	-0.178

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° TAB DEFLECTION

TAP	X/C	RUN 28 TAB DEFLECTION											
		28	342	RUN 28	343	RUN 28	344	RUN 28	345	RUN 28	346	RUN 28	347
MU	0.80	MU	0.80	MU	0.80	MU	0.80	MU	0.80	MU	0.80	MU	0.80
AU	-2.0	AU	-3.0	AU	-4.0	AU	0.	AU	1.0	AU	2.0	AU	3.0
M	0.815	M	0.817	M	0.820	M	0.811	M	0.811	M	0.813	M	0.815
A	-2.00	A	-3.01	A	-4.01	A	0.01	A	1.01	A	2.01	A	3.02
Q0	638.2	Q0	640.1	Q0	642.8	Q0	634.5	Q0	634.5	Q0	636.4	Q0	638.2
P0	1372.6	P0	1369.9	P0	1365.7	P0	1378.2	P0	1378.2	P0	1375.4	P0	1372.6
CP													
1	1.141	CP	1.121	CP	1.099	CP	1.154	CP	1.143	CP	1.136	CP	1.136
2	0.005	U	0.686	U	0.743	U	0.806	U	0.507	U	0.393	U	0.294
3	0.017	U	0.361	U	0.430	U	0.506	U	0.161	U	0.040	U	0.062
4	0.040	U	-0.125	U	-0.026	U	0.080	U	-0.276	U	-0.397	U	-0.494
5	0.065	U	-0.213	U	-0.144	U	-0.069	U	-0.411	U	-0.546	U	-0.656
6	0.090	U	-0.328	U	-0.264	U	-0.189	U	-0.503	U	-0.571	U	-0.690
7	0.130	U	-0.522	U	-0.451	U	-0.373	U	-0.649	U	-0.706	U	-0.758
8	0.168	U	-0.480	U	-0.424	U	-0.361	U	-0.685	U	-0.766	U	-0.832
9	0.233	U	-0.611	U	-0.579	U	-0.525	U	-0.798	U	-0.879	U	-0.934
10	0.335	U	-0.699	U	-0.654	U	-0.594	U	-0.860	U	-0.945	U	-1.002
11	0.500	U	-0.578	U	-0.690	U	-0.732	U	-0.894	U	-1.040	U	-0.844
12	0.625	U	-0.196	U	-0.250	U	-0.395	U	-0.136	U	-0.414	U	-0.904
13	0.769	U	-0.101	U	-0.154	U	-0.198	U	-0.001	U	-0.093	U	-0.988
14	0.915	U	0.037	U	0.018	U	0.062	U	0.164	U	0.161	U	-1.053
15	0.960	U	0.169	U	0.121	U	0.085	U	0.286	U	0.228	U	-0.522
16	0.008	L	0.256	L	0.171	L	0.093	L	0.431	L	0.536	L	-0.479
17	0.017	L	-0.127	L	-0.211	L	-0.303	L	0.055	L	0.176	L	-0.463
18	0.040	L	-0.401	L	-0.469	L	-0.536	L	-0.247	L	-0.133	L	-0.316
19	0.065	L	-0.640	L	-0.696	L	-0.746	L	-0.472	L	-0.347	L	-0.215
20	0.090	L	-0.699	L	-0.766	L	-0.809	L	-0.531	L	-0.431	L	-0.251
21	0.130	L	-0.802	L	-0.878	L	-0.929	L	-0.674	L	-0.605	L	-0.430
22	0.168	L	-0.843	L	-0.902	L	-0.952	L	-0.724	L	-0.649	L	-0.404
23	0.233	L	-0.947	L	-1.003	L	-1.040	L	-0.841	L	-0.729	L	-0.149
24	0.335	L	-0.992	L	-1.044	L	-1.084	L	-0.884	L	-0.785	L	-0.078
25	0.500	L	-0.813	L	-0.765	L	-0.954	L	-0.934	L	-0.883	L	-0.741
26	0.625	L	-0.468	L	-0.523	L	-0.602	L	-0.598	L	-0.297	L	-0.332
27	0.769	L	-0.456	L	-0.513	L	-0.582	L	-0.293	L	-0.044	L	-0.589
28	0.915	L	-0.368	L	-0.462	L	-0.544	L	-0.107	L	0.062	L	-0.133
29	0.960	L	-0.310	L	-0.417	L	-0.508	L	-0.111	L	0.095	L	-0.011

S-58 AIRFOIL - TABULATION OF PRESSURE COEFFICIENTS 3° Tab Deflection

	RUN 28	349	RUN 28	350	RUN 28	351
MU	0.80	MU	0.80	MU	0.80	
AU	4.0	AU	5.0	AU	0.	
M	0.817	M	0.820	M	0.811	
A	4.03	A	5.03	A	0.01	
Q0	640.1	Q0	642.8	Q0	634.5	
P0	1369.9	P0	1365.7	P0	1378.2	
TAP	X/C	CP	CP	CP	CP	CP
1	0.000	1.0115	1.0089	1.0148		
2	0.008	U	0.112	0.023	0.499	
3	0.017	U	-0.239	-0.319	0.151	
4	0.040	U	-0.685	-0.740	-0.305	
5	0.065	U	-0.792	-0.866	-0.419	
6	0.090	U	-0.832	-0.902	-0.504	
7	0.130	U	-0.900	-0.962	-0.732	
8	0.168	U	-0.961	-1.017	-0.703	
9	0.233	U	-1.046	-1.102	-0.807	
10	0.335	U	-1.084	-1.081	-0.870	
11	0.500	U	-0.526	-0.566	-0.894	
12	0.625	U	-0.517	-0.562	-0.160	
13	0.769	U	-0.520	-0.577	-0.003	
14	0.915	U	-0.406	-0.516	0.154	
15	0.960	U	-0.305	-0.427	0.273	
16	0.008	L	0.780	0.848	0.428	
17	0.017	L	0.458	0.544	0.066	
18	0.040	L	0.142	0.222	0.226	
19	0.065	L	-0.072	0.005	0.466	
20	0.090	L	-0.176	-0.099	0.527	
21	0.130	L	-0.346	-0.263	0.665	
22	0.168	L	-0.350	-0.285	0.719	
23	0.233	L	-0.532	-0.471	0.835	
24	0.335	L	-0.496	-0.356	0.880	
25	0.500	L	-0.709	-0.689	0.970	
26	0.625	L	-0.563	-0.685	0.593	
27	0.769	L	-0.180	-0.409	0.282	
28	0.915	L	-0.072	-0.148	0.004	
29	0.960	L	-0.036	-0.125	0.079	