

ERDC/CRREL TR-03-6

Cold Regions Research  
and Engineering Laboratory



**US Army Corps  
of Engineers®**  
Engineer Research and  
Development Center

## **Analysis of the Waste Management Practices at Bosnia and Kosovo Base Camps**

C. James Martel

April 2003

20030910 071

ERDC/CRREL TR-03-6  
April 2003

# **Analysis of the Waste Management Practices at Bosnia and Kosovo Base Camps**

C. James Martel

*Cold Regions Research and Engineering Laboratory  
72 Lyme Road  
Hanover, New Hampshire 03755*

Approved for public release; distribution is unlimited

Prepared for      **OFFICE OF THE CHIEF OF ENGINEERS**

# REPORT DOCUMENTATION PAGE

*Form Approved*  
*OMB No. 0704-0188*

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

<b>1. REPORT DATE (DD-MM-YY)</b> April 2003		<b>2. REPORT TYPE</b> Technical Report		<b>3. DATES COVERED (From - To)</b>		
<b>4. TITLE AND SUBTITLE</b>  Analysis of the Waste Management Practices at Bosnia and Kosovo Base Camps				<b>5a. CONTRACT NUMBER</b>		
				<b>5b. GRANT NUMBER</b>		
				<b>5c. PROGRAM ELEMENT NUMBER</b>		
<b>6. AUTHOR(S)</b>  C. James Martel				<b>5d. PROJECT NUMBER</b>		
				<b>5e. TASK NUMBER</b>		
				<b>5f. WORK UNIT NUMBER</b>		
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b>  U.S. Army Engineer Research and Development Center Cold Regions Research and Engineering Laboratory 72 Lyme Road Hanover, NH 03755-1290				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>  ERDC/CRREL TR-03-6		
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>  Office of the Chief of Engineers Washington, DC 20314-1000				<b>10. SPONSOR / MONITOR'S ACRONYM(S)</b>		
<b>12. DISTRIBUTION / AVAILABILITY STATEMENT</b>  Approved for public release; distribution is unlimited.  Available from NTIS, Springfield, Virginia 22161.				<b>11. SPONSOR / MONITOR'S REPORT NUMBER(S)</b>		
<b>13. SUPPLEMENTARY NOTES</b>						
<b>14. ABSTRACT</b>  In June 2002, the main American base camps in Bosnia and Kosovo were visited to record the types of facilities being used for waste management and to identify any lessons to be learned. This study concluded that the Army should develop a deployable wastewater treatment system for base camps. Development of such a system would avoid the costly set-up and take-down operations required with conventional plants. Also, Eagle Base and Camp Bondsteel would benefit from installing composting operations for sludge stabilization and disinfection. The water supplies are potable at both locations. There is no longer a need to supply drinking water in plastic bottles, so eliminating them will significantly reduce the solid waste stream.						
<b>15. SUBJECT TERMS</b>						
Base camp		Solid waste management				
Bosnia		Waste treatment				
Kosovo		Wastewater treatment				
<b>16. SECURITY CLASSIFICATION OF:</b>				<b>17. LIMITATION OF OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b>	<b>b. ABSTRACT</b>	<b>c. THIS PAGE</b>	<b>19b. TELEPHONE NUMBER (include area code)</b>			
U	U	U	U	27		

## **ABSTRACT**

In June 2002, the main American base camps in Bosnia and Kosovo were visited to record the types of facilities being used for waste management and to identify any lessons to be learned. This study concluded that the Army should develop a deployable wastewater treatment system for base camps. Development of such a system would avoid the costly set-up and take-down operations required with conventional plants. Also, Eagle Base and Camp Bondsteel would benefit from installing composting operations for sludge stabilization and disinfection. The water supplies are potable at both locations. There is no longer a need to supply drinking water in plastic bottles, so eliminating them will significantly reduce the solid waste stream.

**DISCLAIMER:** The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products. All product names and trademarks cited are the property of their respective owners. The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.  
**DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT RETURN TO THE ORIGINATOR.**

## CONTENTS

Contents .....	iii
Preface .....	v
1 INTRODUCTION.....	1
Background .....	1
Objective .....	1
Scope .....	2
2 EAGLE BASE, BOSNIA.....	3
Wastewater treatment facility.....	3
Solid waste management facility.....	6
3 CAMP BONDSTEEL, KOSOVO.....	9
Wastewater treatment facility.....	9
Solid waste management facility.....	14
4 CAMP MONTEITH, KOSOVO WASTEWATER TREATMENT FACILITY .....	17
5 CONCLUSIONS.....	19

## LIST OF ILLUSTRATIONS

Figure 1. Bosnia, showing location of Eagle Base. ....	3
Figure 2. Top of Imhoff tank. ....	4
Figure 3. Concrete channel trickling filter of old Yugoslav wastewater treatment plant. ....	4
Figure 4. Sequencing batch reactor units. ....	5
Figure 5. Waste woodpile at Eagle Base. ....	7
Figure 6. HAZMAT storage facility at Camp Fiala. ....	8
Figure 7. Locations of Camp Bondsteel and Camp Monteith in Kosovo. ....	9
Figure 8. Sewage receiving station. ....	11
Figure 9. Inclined screens for primary treatment. ....	11
Figure 10. Plastic media tower and equalization tank. ....	12
Figure 11. Aerated polishing lagoons. ....	12
Figure 12. Sludge filter press. ....	13
Figure 13. Sludge storage lagoon.....	13
Figure 14. Effluent receiving stream. ....	14
Figure 15. On-site wastewater laboratory. ....	14

Figure 16. Trash incinerator at Camp Bondsteel. ....	15
Figure 17. Wood wastes at Camp Bondsteel. ....	16
Figure 18. Camp Monteith wastewater treatment plant. ....	18

## LIST OF TABLES

Table 1. Wastewater treatment and disposal fact sheet for Eagle Base. ....	6
Table 2. Solid waste management fact sheet for Eagle Base. ....	7
Table 3. Wastewater treatment and disposal at Camp Bondsteel. ....	10
Table 4. Average performance of Camp Bondsteel treatment plant during May 2002. ....	10
Table 5. Solid waste management fact sheet for Camp Bondsteel. ....	15
Table 6. Wastewater treatment and disposal fact sheet for Camp Monteith. ....	17
Table 7. Average performance of Camp Monteith treatment plant during May 2002. ....	18

## PREFACE

This report was prepared by Dr. C. James Martel, Environmental Engineer, Applied and Military Engineering Branch, Cold Regions Research and Engineering Laboratory, U.S. Army Engineer Research and Development Center, Hanover, New Hampshire.

This project was funded under BC002 – *Winter Base Camp Construction & Maintenance Operations*. The author acknowledges Dr. Raymond Rollings, Project Manager, without whose support this project would not have taken place. A special thanks goes to Nicholas Collins, who accompanied the author on the trip. He provided a wealth of information on who to contact, and how to arrange this trip.

At the time of publication of this report, Director of ERDC was Dr. James R. Houston. Commander was COL James W. Morris.

# AN ANALYSIS OF THE WASTE MANAGEMENT PRACTICES AT BOSNIA AND KOSOVO BASE CAMPS

C. JAMES MARTEL

## 1 INTRODUCTION

### Background

As part of NATO led peacekeeping operations, the Army has constructed many base camps in the Balkans. Almost 10,000 troops were stationed at 12 of these base camps in May 2002. Most of the soldiers were stationed at Eagle Base (1260) in Bosnia and Camp Bondsteel (3950) in Kosovo. In addition to the military population, there is approximately an equal number of DOD civilians and contractors who work on-post. The normal tour of duty for each soldier is 6 months. DOD civilians and contractors can be stationed there for several years, depending on the workload.

U.S. forces entered Bosnia-Herzegovina in December 1995 under Operation Joint Endeavor. It was supposed to be a 6 month "temporary" occupation, so tent camps were quickly set up to establish a presence and keep the troops sheltered and out of the mud. However, it soon became obvious that peacekeeping would require a longer commitment. Since then, military issue tents have been replaced with SEA (South East Asia) huts, which are large plywood buildings like the ones used in Vietnam. Each hut has heat and air conditioning, and access to toilet and shower facilities.

U.S. forces entered Kosovo in June 1999 following NATO Operation Allied Force. Based on lessons learned in Bosnia, the base camp planners decided to proceed directly to construction of SEA huts rather than tents. In a marvel of engineering achievement, Camp Bondsteel and Camp Montieth were constructed in a 4-month period. Today, these base camps have the same facilities as those in Bosnia.

Brown and Root Services (BRS) of Houston, Texas, deserves much of the credit for constructing and maintaining all the base camps in the region. They have their own base camps, which contain most of the support personnel and equipment.

### Objective

In fiscal year 2002, CRREL received funding for work related to design, construction, and maintenance of base camps. One area of concern was the waste management practices. Base camps are considered only temporary installations, but they contain most of the utilities found at permanent installations. This "temporariness" presents a unique challenge to base camp planners

and designers. The objective of this study was to record the types of facilities being used and identify any lessons to be learned.

**Scope**

The study was conducted at Eagle Base in Bosnia, and Camp Bondsteel and Camp Montieth in Kosovo. These base camps were selected because they are the largest. Camp Comanche in Bosnia was also visited but it was being dismantled. Although we visited Camp Able Sentry in Macedonia, it was not of interest from a facilities point of view because it was served by nearby Skopje Airport.

## 2 EAGLE BASE, BOSNIA

Eagle Base is located near Tuzla at a former Yugoslav Air Force Base (Fig. 1). It is a 2.5-hour flight by C-130 from Ramstein Air Force Base in Germany. I arrived on 19 June 2002 in the late afternoon and stayed at the Audie Murphy Inn.



Figure 1. Bosnia, showing location of Eagle Base.


The next morning I met with James Lee, Environmental Officer, and Almir Zejcorovic, a Bosnian who served as DPW interpreter. We discussed the water supply, wastewater treatment, and solid waste management systems, and then went on a tour of each facility.

### Wastewater treatment facility

The wastewater treatment facility is located at the south end of the base near the airfield. The original Yugoslav treatment plant had a 550-person capacity, so it was quickly overloaded when the Americans arrived with over 3000 soldiers. BRS tried several methods to upgrade the facility, including replacing pumps, cleaning of settling tanks, and bacterial augmentation. None of these measures worked, so a new treatment plant was constructed in 1999 at a cost of approximately \$1,000,000. Another treatment plant, using the same technology, was constructed at neighboring Camp Comanche. At the time of my visit, the Camp Comanche plant had been dismantled and was headed for Camp McGrath in Kosovo. Dismantling this unit required the manual removal of thousands of bolts. Reassembly at Camp McGrath will require an equally laborious task. No information was available on the cost of this effort.

The old Yugoslav wastewater treatment facility consisted of a bar screen, Imhoff tank (Fig. 2), and what can be described as an inclined concrete channel trickling filter (Fig. 3). It was designed so that the primary effluent from the Imhoff tank was applied at the top of the reactor. The wastewater then flowed down a series of concrete channels, which were probably filled with 50-

to 76-mm (2- to 3-in.) trap rock. Treatment occurred as the wastewater came in contact with the microorganisms attached to the trap rock and the concrete channels. This is a rather unique process and not used in the U.S., but is similar to the trickling filter process. Sludge collected in the Imhoff Tank was placed on sand beds for dewatering. Effluent from the plant was discharged into a ditch, which flowed to the River Spreca.

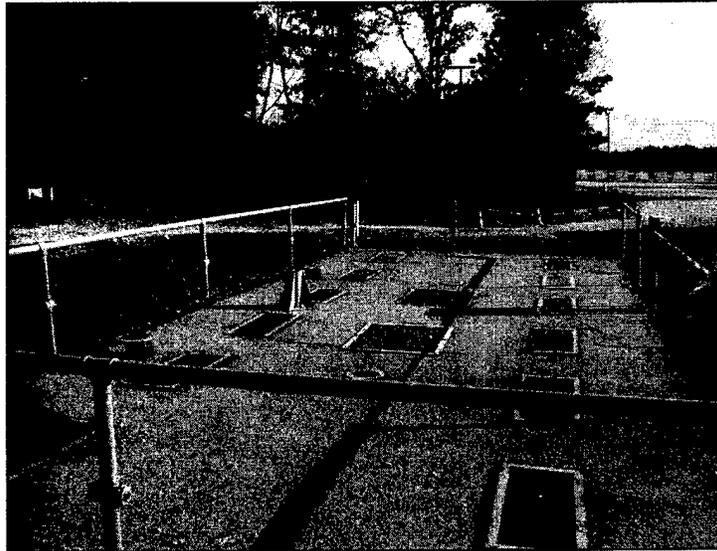

**Figure 2. Top of Imhoff tank.**



**Figure 3. Concrete channel trickling filter of old Yugoslav wastewater treatment plant.**

The new treatment plant uses the existing bar screen and Imhoff tank. However, the old trickling filter was replaced with two sequencing batch reactors (Fig. 4) having a combined ca-

capacity of 1136 m<sup>3</sup>/day (300,000 gal./day). The reactors were designed and manufactured by Farmatic Anlagenbau GmbH. Operation began in December 1999. Information about the new plant is shown in Table 1.



**Figure 4. Sequencing batch reactor units.**

Mr. Lee indicated that his main concern was the lack of control over contract disposal of sludge. The U.S. Government could be held liable for illegal disposal practices. As a result, he plans to institute a composting operation, which would disinfect the sludge and make it usable for land application. Wood chips would come from trees cut down during Mine Clearing and Proving (MCAP) operations.

The effluent produced by the wastewater plant is of good quality and meets U.S. Secondary Standards (30 mg/L BOD and 30 mg/L TSS). Reportedly, it is of a better quality than the receiving water.

The present doctrine of using existing treatment facilities for base camps was not acceptable in the Bosnian case. The plant was quickly overloaded and failed to meet secondary discharge standards. Consequently, an expensive conventional secondary plant was built, which must be disassembled when the base camp is deactivated. The lesson learned from this experience is that a deployable wastewater treatment plant is needed.

**Table 1. Wastewater treatment and disposal fact sheet for Eagle Base.**

<b>Date</b>	20 June 2002
<b>Location</b>	Eagle Base, Tusla Bosnia
<b>Point of contact</b>	James Lee, Matija Lesic
<b>Service population</b>	4000 (est.) during Transfer of Authority only. The regular population is around 2000 to 2200.
<b>Flow rate</b>	1000 m <sup>3</sup> /day (264,172 gal./day)
<b>Wastewater characteristics</b>	368 mg/L BOD; 455 mg/L TSS
<b>Collection system</b>	Underground sewer—80% Tank trucks—20%
<b>Treatment processes</b>	Bar screen, grinder, storage tank (8- x 5- x10-m Imhoff tank), flowmeter, two sequencing batch reactors (600 m <sup>3</sup> each), discharge to drainage ditch that flows into the River Spreca. No disinfection. The sludge is pumped to a storage tank and mixed by paddle stirrers. Sludge is removed by contractor and transported to a treatment plant near the town of Gradacac where the sludge is treated to Class A Standards.
<b>Effluent characteristics</b>	7.6 mg/L TSS from reactor 1; 9.4 mg/L TSS from reactor 2. 10.0 mg/L BOD from reactor 1; 10.2 mg/L BOD from reactor 2. BOD was reduced to 3–9 mg/L after removal of food grinders.
<b>Discharge req.</b>	30 mg/L TSS and BOD, 80 mg/L COD
<b>Past practices</b>	Old Yugoslav plant consisting of bar screen, Imhoff tank, channel aerator, discharge to River Spreca. Sludge was dewatered on drying beds. Final disposition unknown.
<b>Future plans</b>	Sludge composting operation using wood chips from Mine Clearing and Proving (MCAP) operation. Incorporate some solid wastes and food wastes into composting operation.
<b>Lessons learned</b>	It would have been cheaper and faster to build a modern STP rather than utilize the existing antiquated and undersized facility.
<b>Comments</b>	DPW is concerned about the high cost and difficulties involved with hauling wastes in a deployed area. Other European operations are saving money by composting.

### **Solid waste management facility**

Eagle Base generates the same types of waste as a small community, with the exception of an extraordinarily large volume of plastic water bottles. Bottled water became the beverage of choice during the early days of base camp life when a safe, potable water source was not available. This practice is very expensive and plans are to switch to a local water source later this year.

Refuse is collected in dumpsters and picked up by compactor trucks. It is then burned in a waste-fuel-fired, hot-air curtain incinerator. Reportedly, this incinerator requires waste wood and paper to operate properly. This need negates any wood and paper recycling effort. Figure 5 shows a typical pile of wood waste. Most of the wood waste comes from pallets. Aluminum cans are the only items that are recycled. Table 2 presents more information on the solid waste system at Eagle Base.

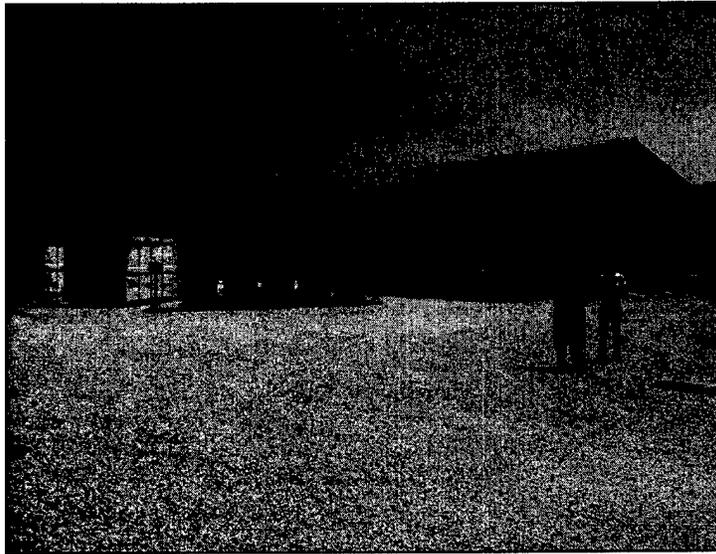


Figure 5. Waste woodpile at Eagle Base.

Table 2. Solid waste management fact sheet for Eagle Base.

<b>Date</b>	20 June 2002
<b>Location</b>	Eagle Base, Tuzla, Bosnia
<b>Point of contact</b>	James Lee
<b>Service population</b>	3000–4000
<b>Sources</b>	Eagle base, and three FOB's, and three hilltops.
<b>Types and quantities</b>	2294 m <sup>3</sup> /day (3000 yd <sup>3</sup> /day). Wood, mixed paper, plastic bottles, mixed packaging, food waste, medical wastes, expired drugs, hand towels, and unpurchased merchandise.
<b>Onsite handling and storage</b>	Thirty-one 3.8-m <sup>3</sup> (5-yd <sup>3</sup> ) dumpsters and fifty-one 340-L (90-gal.) totes.
<b>Collection method</b>	Compaction type garbage trucks.
<b>Processing technique</b>	Separation of inappropriate wastes.
<b>Disposal method</b>	Incineration (hot air curtain, waste fuel fired).
<b>Hazardous wastes</b>	Separate collection and disposal.
<b>Recycled materials</b>	Aluminum cans.
<b>Lessons learned</b>	Can't recycle products with high BTU potential because it would harm incinerator operations. The incinerator needs the recyclables as a fuel source.
<b>Comments</b>	None

Hazardous wastes are handled separately and stored at nearby Camp Fiala, a base camp operated by BRS (see Fig. 6). These wastes are then transported to Germany and other locations for disposal.



**Figure 6. HAZMAT storage facility at Camp Fiala.**

### 3 CAMP BONDSTEEL, KOSOVO

Camp Bondsteel is located near Uroševac, on 1000 acres of farmland (see Fig. 7). It is the headquarters for the U.S. Sector in southeast Kosovo. It was named after Vietnam War Medal of Honor recipient Sgt. James L. Bondsteel.

I arrived at Skopje International Airport in Macedonia on Saturday, 22 June, and was driven to Camp Bondsteel under armed escort. My point of contact was David Carte, Environmental Engineer, Task Force Falcon.

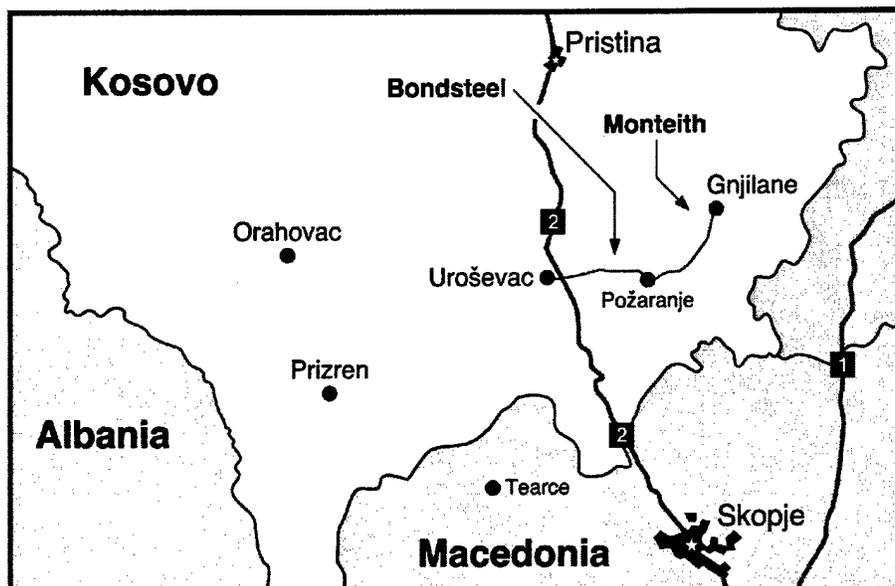


Figure 7. Locations of Camp Bondsteel and Camp Monteith in Kosovo.

#### Wastewater treatment facility

The wastewater treatment facility is located near the entrance to the camp. On 23 June 2002, Wiley Cawthra, Superintendent, gave us a tour of the plant. Details of the plant are listed in Table 3. Photos of the main unit operations are shown in Figures 8–15.

According to the May Monthly Report (see Table 4), the average carbonaceous biochemical oxygen demand (CBOD), total suspended solids (TSS), and chemical oxygen demand (COD) concentrations in the treatment plant effluent were almost as low as those in the pond effluent. The average CBOD in the pond effluent was only 1.0 mg/L less than the average CBOD in the treatment plant effluent. Similarly, the average TSS and COD concentrations in the pond effluent were only slightly lower than those in the plant effluent. The only parameter that was appreciably reduced by the ponds was the  $\text{NH}_3\text{-N}$  concentration, which was reduced from 34 to 15 mg/L. These data suggest that it is not beneficial to discharge the treatment plant effluent to the ponds.

**Table 3. Wastewater treatment and disposal at Camp Bondsteel.**


<b>Date</b>	23 June 2002
<b>Location</b>	Camp Bondsteel, Kosovo
<b>Point of contact</b>	Wiley Cawthra
<b>Service population</b>	4200 est.
<b>Flow rate</b>	± 1230 m <sup>3</sup> /day (± 325,000 gal./day)
<b>Wastewater characteristics</b>	1100 mg/L COD; 80 mg/L NH <sub>3</sub> ; 500 mg/L TSS; 270 mg/L BOD
<b>Collection system</b>	14.5 km (9 miles) of 152- to 559-mm (6- to 22-in.) pipe 65–70%, rest hauled in from other base camps.
<b>Treatment processes</b>	Inclined screens—plastic media tower—activated sludge—secondary clarifier—three polishing ponds. Sludge is aerobically digested, dewatered with a filter press, stored in plywood containers, and stacked in a lagoon.
<b>Effluent characteristics</b>	95% compliance, occasional TSS problem.
<b>Discharge req.</b>	25 mg/ L BOD, 30 mg/L TSS, 6.0–9.0 pH.
<b>Past practices</b>	Started out with truck collection and disposal to pit, then to a four-cell aerated lagoon, then to conventional secondary plant.
<b>Future plans</b>	Pretreatment by primary clarification and further aeration. Change portalet chemicals. Winter protection for dewatering operations. More pressure washers.
<b>Lessons learned</b>	Need better master planning to project growth. Present plan did not include workers—portalets not considered—BRS has 3600 people on-site.
<b>Comments</b>	Good communication between BRS and DPW. BRS needs a recommendation on what to do with stacked sludge.

**Table 4. Average performance of Camp Bondsteel treatment plant during May 2002.**

Water quality parameter (mg/L)	Influent	Treatment plant effluent	Pond effluent		
			#1	#2	#3
CBOD	250	9			8
TSS	327	34			32
COD	786	126	113	109	121
NH <sub>3</sub> -N	81	34	27	22	15

The TSS concentration in the effluent from both treatment plant and ponds was greater than 30 mg/L, which is a violation of the discharge standard. If this continues, remedial action may be necessary.

As shown in Figures 12 and 13, sludge is placed in plywood boxes and stored in a lagoon located on-site. The lagoon is near capacity, so it will need emptying, or an alternative disposal method will be needed. At the time of my visit, Mr. Carte was exploring the option of removing all the plywood boxes and burying them in a local landfill. His main concern was possible local contamination attributable to inadequate burial.

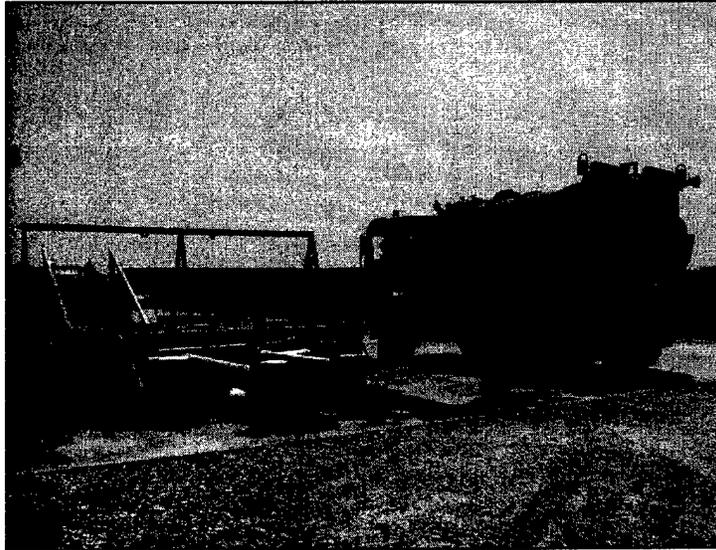

**Figure 8. Sewage receiving station.**



**Figure 9. Inclined screens for primary treatment.**




**Figure 10. Plastic media tower and equalization tank.**




**Figure 11. Aerated polishing lagoons.**




**Figure 12. Sludge filter press.**

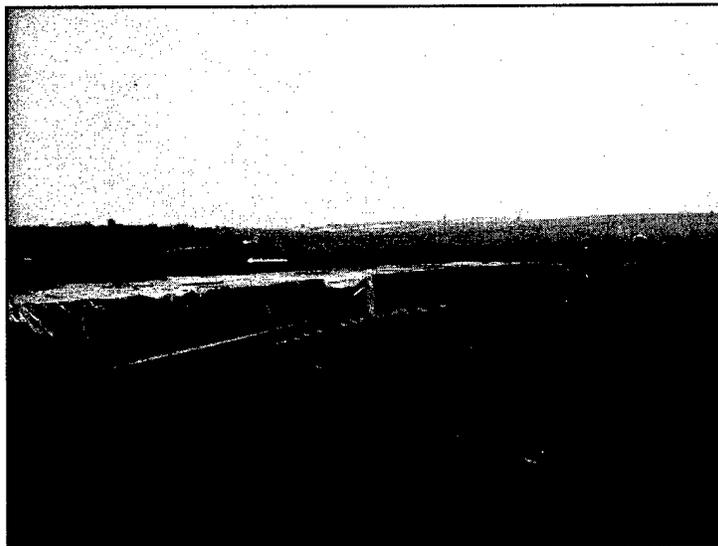

**Figure 13. Sludge storage lagoon.**

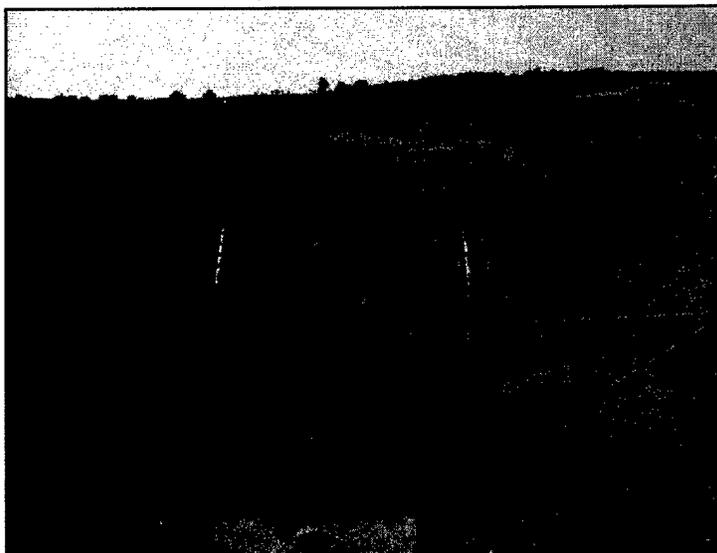

**Figure 14. Effluent receiving stream.**

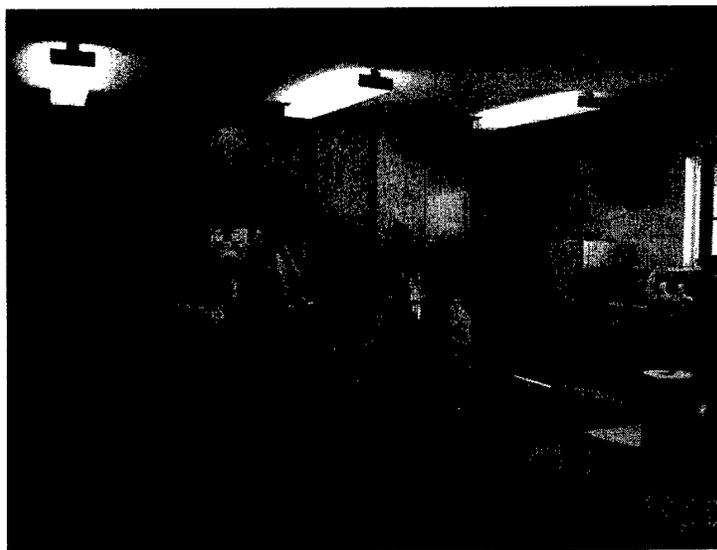

**Figure 15. On-site wastewater laboratory.**


#### **Solid waste management facility**

All solid wastes from Camp Bondsteel as well as Camp Monteith are collected and incinerated at the Camp Bondsteel facility. Details of the facility are shown in Table 5. Photos of the screened incinerator and wood waste pile are shown in Figures 16 and 17, respectively. Although this type of incinerator would not meet stateside emission standards, it does control disease vec-


tors and significantly reduces the volume of solid wastes. Ash from the incinerator is piled on-site and then buried in a landfill.

**Table 5. Solid waste management fact sheet for Camp Bondsteel.**

<b>Date</b>	24 June 2002
<b>Location</b>	Camp Bondsteel
<b>Point of contact</b>	Ray Alderson
<b>Service population</b>	10,000 including contract local nationals.
<b>Sources</b>	Packaging, construction material.
<b>Types and quantities</b>	Plastics, glass, lumber is probably the biggest fraction.
<b>On-site handling and storage</b>	Dumpsters.
<b>Collection method</b>	Ten collection trucks.
<b>Processing technique</b>	Trash deposited in pole barn and searched by local nationals for explosives and hazardous wastes.
<b>Disposal method</b>	Incinerated in enclosed burn pit, transferred to cool down pad, and trucked to landfill for disposal.
<b>Hazardous wastes</b>	Stored in designated areas and transported to treatment facility.
<b>Recycled materials</b>	Lumber sent to fire demo pit for training. No recycling of cans and bottles. No paper recycling because of operational secrecy.
<b>Lessons learned</b>	Should have put garbage grinders in dining facilities so garbage would go to WWTP rather than solid waste facility.
<b>Comments</b>	All solid waste generated at Camp Monteith is incinerated at Bondsteel.

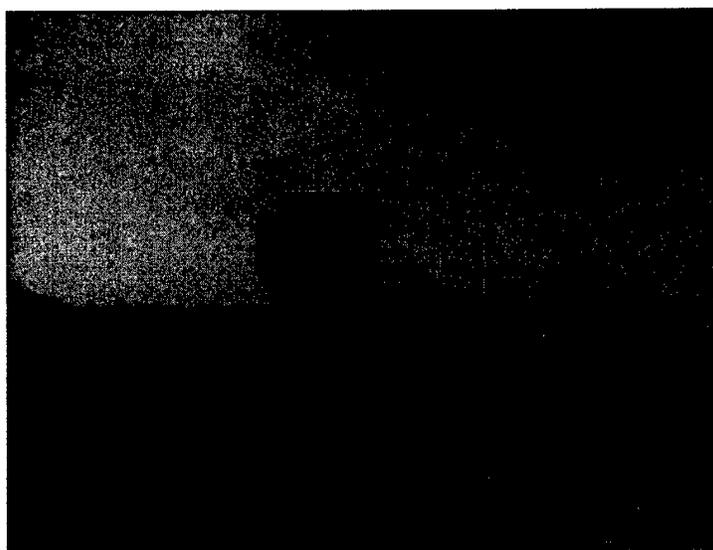

**Figure 16. Trash incinerator at Camp Bondsteel.**

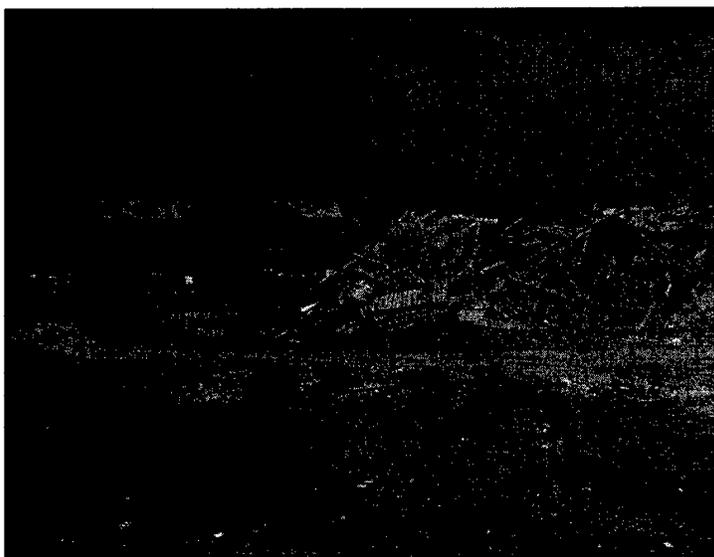

**Figure 17. Wood wastes at Camp Bondsteel.**

#### 4 CAMP MONTEITH, KOSOVO WASTEWATER TREATMENT FACILITY

About a 1-hour drive east of Camp Bondsteel is Camp Monteith. Located near the town of Gnjilane, it was a Yugoslav Army barracks that was heavily damaged during the NATO air campaign. The camp is named after World War II Medal of Honor recipient Army 1<sup>st</sup> Lt. Jimmie W. Monteith Jr. Approximately 1400 troops are stationed at this base camp.

Only information on the wastewater treatment facility will be presented in this report. As indicated earlier, Camp Monteith has no solid waste facility. All solid wastes are trucked to Camp Bondsteel.

Camp Monteith has the same type of wastewater treatment facility as Camp Bondsteel. Wiley Cawthra is also the Superintendent of the plant. Details of the facility are shown in Table 6. A photo of the facility is shown in Figure 18.


The May 2002 performance data shown in Table 7 indicate that the treatment plant is performing well within the requirements of the discharge permit. Average CBOD and TSS concentrations in the effluent were only 4.5 and 9.0 mg/L, respectively. These data also suggest that the treatment plant at Camp Bondsteel may be underperforming, as it has the same basic treatment plant.

**Table 6. Wastewater treatment and disposal fact sheet for Camp Monteith.**

<b>Date</b>	23 June 2002
<b>Location</b>	Camp Monteith, Kosovo
<b>Point of contact</b>	Wiley Cawthra
<b>Service population</b>	1400 (est.)
<b>Flow rate</b>	492 m <sup>3</sup> /day (130,000 gal./day)
<b>Wastewater characteristics</b>	240 mg/L BOD; 650 mg/L COD; 275–300 mg/L TSS; 75 mg/L NH <sub>3</sub> .
<b>Collection system</b>	7.2 km (4.5 miles) of pipe, 67% new, 33% old pipe that occasionally needs patching owing to war damage.
<b>Treatment processes</b>	Similar to Bondsteel except there are no polishing ponds. Discharge is to a ditch. All biosolids are trucked to Bondsteel.
<b>Effluent characteristics</b>	6–8 mg/L BOD; 45–60 mg/L COD; 2 mg/L TSS; 2–6 mg/L NH <sub>3</sub> .
<b>Discharge req.</b>	Same as Bondsteel. 25 mg/L BOD, 30 mg/L TSS, 6.0–9.0 Ph.
<b>Past practices</b>	Holding tanks, truck to Bondsteel—Built collection system for holding tanks, truck to Bondsteel—Built present treatment plant.
<b>Future plans</b>	None
<b>Lessons learned</b>	Processes work when properly sized. Could handle 30–34 m <sup>3</sup> /day (8000–9000 gal./day) more of outpost waste.
<b>Comments</b>	None

**Table 7. Average performance of Camp Monteith treatment plant during May 2002.**

Water quality parameter (mg/L)	Influent	Treatment plant effluent
CBOD	240	4.5
TSS	255	9
COD	673	63
NH <sub>3</sub> -N	64	2.3

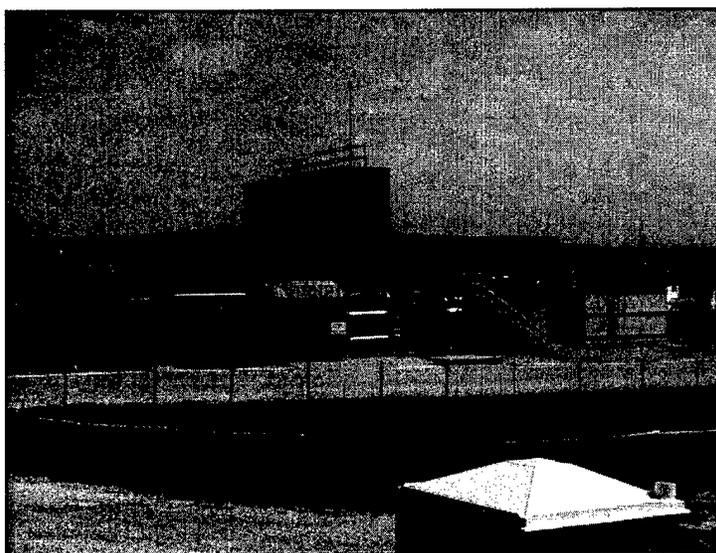

**Figure 18. Camp Monteith wastewater treatment plant.**

## 5 CONCLUSIONS

Eagle Base should install a composting operation for sludge disinfection. A ready and cheap supply of wood chips is available from MCAP operations. The composted sludge would then be suitable for land application without fear of spreading disease among the local population.

The water supplies are potable at both locations. There is no longer a need to supply drinking water in plastic bottles. Eliminating the plastic bottles will significantly reduce the solid waste stream.

Camp Bondsteel should also consider installing a biosolids composting operation. This will eliminate the sludge storage problem in the lagoon.

Camp Bondsteel should try to improve the performance of their treatment plant to match that of the Camp Monteith plant. A bypass should be constructed to allow direct discharge of the treatment plant effluent to the receiving stream. The polishing ponds could be converted to a composting facility.

The Army, in conjunction with BRS, should develop a deployable wastewater treatment system for base camps. Development of such a system would avoid costly set-up and take-down operations required with conventional plants.