

**SHIP PRODUCTION COMMITTEE
FACILITIES AND ENVIRONMENTAL EFFECTS
SURFACE PREPARATION AND COATINGS
DESIGN/PRODUCTION INTEGRATION
HUMAN RESOURCE INNOVATION
MARINE INDUSTRY STANDARDS
WELDING
INDUSTRIAL ENGINEERING
EDUCATION AND TRAINING**

September 1985
NSRP 0226

THE NATIONAL SHIPBUILDING RESEARCH PROGRAM

**1985 Ship Production Symposium
Volume II
Paper No. 15:
Islands of Automation in Shipbuilding**

U.S. DEPARTMENT OF THE NAVY
CARDEROCK DIVISION,
NAVAL SURFACE WARFARE CENTER

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE SEP 1985	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE The National Shipbuilding Research Program 1985 Ship Production Symposium Volume II Paper No. 15: Islands of Automation in Shipbuilding		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Surface Warfare Center CD Code 2230-Design Integration Tools Building 192 Room 128 9500 MacArthur Bldg Bethesda, MD 20817-5700		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited			
13. SUPPLEMENTARY NOTES			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	SAR
			18. NUMBER OF PAGES 26
			19a. NAME OF RESPONSIBLE PERSON

DISCLAIMER

These reports were prepared as an account of government-sponsored work. Neither the United States, nor the United States Navy, nor any person acting on behalf of the United States Navy (A) makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness or usefulness of the information contained in this report/manual, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or (B) assumes any liabilities with respect to the use of or for damages resulting from the use of any information, apparatus, method, or process disclosed in the report. As used in the above, "Persons acting on behalf of the United States Navy" includes any employee, contractor, or subcontractor to the contractor of the United States Navy to the extent that such employee, contractor, or subcontractor to the contractor prepares, handles, or distributes, or provides access to any information pursuant to his employment or contract or subcontract to the contractor with the United States Navy. ANY POSSIBLE IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR PURPOSE ARE SPECIFICALLY DISCLAIMED.

ISLANDS OF AUTOMATION IN SHIPBUILDING

By

Robert J. Bellonzi

Bath Iron Works

ABSTRACT

Many experts believe that automation techniques, applied independently of corresponding system improvements, will produce only limited results in productivity improvement. However, a number of opportunities are available in shipbuilding for substantial productivity improvement by implementing stand-alone automation technologies (sometimes called "islands of automation").

The challenge to increase the level of automation in shipbuilding can best be met by matching proven technologies with those opportunities that justify automation. Proven automation technologies are readily available and government programs are in place to provide the shipbuilder with both financial and technical support. Effective implementation of automation technologies can be greatly enhanced by following a few basic points in project development and control.

Program results at Bath Iron Works have demonstrated that implementation of "islands of automation" can result in substantial productivity improvement.

ISLANDS OF AUTOMATION

IN SHIPBUILDING

INTRODUCTION

A recent article written about u.S. shipbuilding productivity states that automation technology; applied independently of corresponding system improvements, such as group technology and process lanes, will usually produce only limited results in productivity improvement.¹ While I generally agree with this conclusion, our own experience with production automation programs at Bath Iron Works (BIW)^{2,3} clearly demonstrates that a number of excellent opportunities are available in shipbuilding for substantial productivity improvement by implementing stand-alone (i.e. system independent) automation technologies (which are referred to in this report as "islands of automation").

A major government commitment exists today for improving shipbuilding industry productivity, mainly through the development and implementation of automation technology and system innovations. This commitment is emphasized in a number of government sponsored publications which include the National Shipbuilding Research

Program (NSRP) Long Range Productivity Plan (Figure 1), dated September, 1984, and the Naval Sea Systems Command (NAVSEA) Integrated Robotics Program Annual Report (Figure 2), dated December, 1984. With this commitment to improve shipbuilding productivity, the shipbuilding industry presently has an outstanding opportunity to obtain substantial government support, both technical and financial, for the implementation of "islands of automation" in ship construction.

THE CHALLENGE

A major challenge of the shipbuilding industry for improving productiuity is to increase the application of proven automation technologies for ship construction. In this regard, approximately 6,500 robots are presently at work in other U.S. industries, performing welding, painting, inspection, assembly, and machine loading operations,⁴ yet I am not aware of a single robot actually performing work in shipyards today on a continuous production basis. Furthermore, of some twenty shipbuilding/weapons manufacturing robotics projects listed in the NAVSEA Integrated Robotics Program, only two are identified as being performed by shipyards.⁵

The U.S. shipbuilding industry itself recognizes and emphasizes the need to concentrate on implementation of proven technologies. For instance, the NSRP Long Range Productivity Improvement Plan states that "the immediate emphasis (of this Plan) must be the implementation of existing technologies that have already demonstrated their effectiveness in foreign applications or in other segments of industry within the country."⁶ The

Department of Defense also emphasizes the implementation of proven technologies in the DoD statement of principles for the Manufacturing Technology Program, dated March 14, 1980, which states that "technical feasibility has been previously demonstrated before procurement-funded manufacturing technology projects are initiated." ⁷

The challenge to increase the level of automation in shipbuilding can best be met by matching proven automation technologies with those operations that justify automation, and by effectively managing these automation programs to ensure obtaining the desired results. This report emphasizes how BIW is meeting this challenge in its own automation programs.

IDENTIFICATION OF AUTOMATION TECHNOLOGY OPPORTUNITY AREAS

The identification of appropriate operations for automation in shipbuilding can be simplified by adopting an informal evaluation procedure which has been very successful at BIW. BIW first identifies those manufacturing operations having high labor content and (generally) consisting of low technology processes. Typical of such operations in shipbuilding are those of manual layout, painting, cutting, burning, welding, material handling, etc. To ensure that the maximum number of candidate operations for automation are identified, this initial phase should be performed without consideration of available technologies. Applicable government funded reports can also be used effectively to augment the findings of self-assessment studies for identifying the candidate operations. One such report used extensively by BIW for this purpose is the Maritime Administration Technology Survey of Major U.S. Shipyards, dated July, 1978.⁸ This survey rates the average level of technology of thirteen major U.S. shipyards (Table 1) for seventy-two distinct shipbuilding operations against a consistent set of internationally applied standards.

The final phase of this recommended evaluation process is to identify suitable automation technologies for each of the candidate operations, and to select the one technology that is considered to be most effective in improving productivity. In this matter, BIW has relied entirely on technical proposals from leading equipment manufacturers to identify and select sound automation systems (hardware and software).

The evaluation procedure described above resulted in the selection of a highly successful computer controlled sheetmetal fabrication system (Figure 3) to automatically produce sheetmetal parts for ventilation assemblies (Figure 4) at BIW. This same evaluation process also resulted in a recent BIW proposal to implement a robotics shapes fabrication system (Figure 5) for the automatic production of structural shapes (Figure 6). The selected robotics system is projected to eliminate the low technology, labor intensive methods presently used for structural shapes fabrication, at the Bath shipyard (Figure 7).

KEY POINTS FOR PROGRAM SUCCESS

Effective implementation of automation technologies can be greatly enhanced by adhering to the following key points for program success :

- o Use fully proven technologies. This allows the shipbuilder to concentrate his efforts on application, rather than development, of automation technology, thereby increasing the chance of program success. The two BIW automation programs combine proven equipment technology and specialized computer software to provide effectively integrated systems. The success of the sheetmetal fabrication system has been demonstrated by reducing ventilation component fabrication labor by 54%. I am also confident that the proposed robotics shapes processing system will be equally successful at reducing fabrication labor.
- o Limit the financial risk of the program. With the generally high levels of capital investment associated with automation systems, financial risks to the individual shipyard can be substantial. These risks can be reduced to acceptable levels through cost sharing of such programs with the government under either the Maritime Administration Ship Producibility Research Program or the Navy Manufacturing Technology Program. A third program, the navy Industrial Modernization Incentive Program (IMIP), provides financial incentives to contractors for increasing the level of productivity related capital investment. Although this program does not provide for government cost sharing, it does reduce financial risk by allowing the contractor a larger share of resulting project savings.

- o Plan for future technology enhancements. If anticipated technical developments can be incorporated in the automation system at a later date, the original system should be designed with sufficient flexibility to readily add such enhancements. Typical enhancements might include the addition of computer aided design capability to a computer controlled machine, or the addition of automated material handling to an automatic fabrication operation. Regardless of the nature of these enhancements, initially providing for their incorporation at a later date will usually result in substantial increases in productivity, with minimum additional cost and effort. For instance, BIW is developing the Robotics Shapes Processing System software to readily accept a computer aided design and manufacturing capability (Figure 8) at a later date.
- o Develop the project schedule around measurable and attainable results-oriented milestones. This is the most critical item for program success because it provides the basic control for both schedule and cost performance, and is especially necessary for those projects where subcontractor progress payments are related to performance against discrete milestones. The subcontractor should participate directly in the project schedule development process at the outset to ensure the mutual agreement between the shipbuilder and subcontractor that all project milestone target dates are achievable, and that there are a sufficient number of interim reviews specified in the schedule to measure subcontractor progress. These points for effective project schedule development are reflected in the, BIW project (schedule for the robotics structural fabrication system (figure 9)).

- The major milestone tasks are broken down into a number of discrete and easily measurable sub-tasks. Also, where necessary, the schedule includes interim design reviews.
- The first project schedule task is the development of the system functional specifications. These specifications must clearly identify all operating requirements of the automation system before beginning the development of subsequent project tasks. Preparation of functional specifications for this program was accomplished jointly with the subcontractor to ensure an effective fit between the resulting system and the shipyard operating requirements.
- The highly technical tasks such as equipment design, software development, and system integration and test are the responsibility of the subcontractor, with BIW's efforts concentrated on program management, systems installation, and training. BIW considers that technology development should remain with those industries that are best equipped with the necessary technical expertise and resources for such work.

- o Establish a permanent organization at the outset of the program. It is vital that this organization be structured to ensure top management support, and include permanently assigned production and technical personnel throughout the program. The Robotics Shapes Fabrication Project Organization (Figure 10) meets these requirements by organizing under the Senior Vice President of Operations and by establishing a project implementation team with permanently assigned people from Systems (CAD/CAM), Industrial Engineering, Production Planning (Mold Loft), Plant Engineering, and Production.

Summary

Implementation of "islands of automation" in shipbuilding can generate substantial productivity improvement as demonstrated by our program results at BIW. Proven automation technologies are readily available and government programs are in place to provide the shipbuilder with both financial and technical support. Finally, the chance of automation program success can be greatly improved by following a few basic points in project development and control. The responsibility for increasing the level of automation in ship construction clearly rests with the shipbuilding industry.

REFERENCES


1. Weirs, Bruce J., "The Productivity Problem in U.S. Shipbuilding," Journal of Ship Production, Vol. 1, No. 1, February, 1985, pp 7-28.
2. Bath Iron Works Corp., "Detailed Proposal and Quotation, Computerized Numerically Controlled (CNC) Sheetmetal Fabrication System," December 21, 1979. Revised April 30, 1980. Ref. NAVSEA Contract No. N00140-80-C-0009.
3. Bath Iron Works Corp., "Project Proposal, Programmable Robotic Shapes Processing System," January 9, 1985. Revised April 1, 1985. Ref. NAVSEA Contract No. N00024-85-C-5355.
4. Editor, "Robot Safety; A Proposed Standard Details Guidelines," Industrial Safety and Hygiene News, December, 1984, page 15.
5. Everett, LCDR H.R., "Naval Sea Systems Command Integrated Robotics Program, Annual Report, FY-1984," NAVSEA Technical Report No. 450-90G-TR-0002, December, 1984, page 109.
6. Ship Production Committee of the Society of Naval Architects and Marine Engineers, "National Shipbuilding Research Program Long-Range Productivity Plan," September, 1984, Section 3, page 6.
7. Bement, et al, "Statement of Principles for Department of Defense Manufacturing Technology Program," March 14, 1980.
8. Marine Equipment Leasing, Inc., "Technology Survey of Major U.S. Shipyards, Report of a Survey Made for U.S. Department of Commerce Maritime Administration," July, 1978, pp 1-60.

FIGURES

1. National Shipbuilding Research Program Long-Range Productivity Improvement Plan Cover Page
2. Naval Sea Systems Command Integrated Robotics Program Annual Report Cover Page
3. BIW Computer Controlled Sheetmetal Fabricator Sketch
4. Typical Marine Type Sheetmetal Ventilation Component
5. General Arrangement of Robotics Shapes Processing System
6. Typical Marine Type Fabricated Structural Shape
7. Present and Proposed Shapes Processing Methods
8. Robotics Shapes Processing System Flow
9. Robotics Shapes Processing System Project Schedule
10. Robotics Shapes Processing System Project Organization

Table 1. Average Levels of Technology for Thirteen U.S. Shipyards

THE NATIONAL SHIPBUILDING RESEARCH PROGRAM LONG-RANGE PRODUCTIVITY IMPROVEMENT PLAN

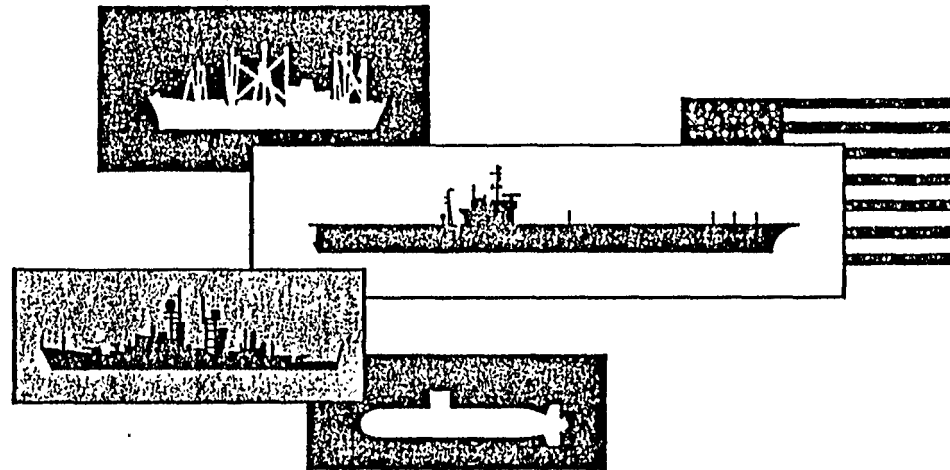

PREPARED BY:
THE SHIP PRODUCTION COMMITTEE OF
THE SOCIETY OF NAVAL ARCHITECTS
& MARINE ENGINEERS
SEPTEMBER 1984

FIGURE 1

NAVAL SEA SYSTEMS COMMAND INTEGRATED ROBOTICS PROGRAM

ANNUAL REPORT FISCAL YEAR 1984

OFFICE OF ROBOTICS AND AUTONOMOUS SYSTEMS
(SEA 90G)




DECEMBER 1984

Distribution limited to U.S. Government agencies and their contractors; material contains critical technology. Other requests for this document shall be referred to COMNAVSEASYSCOM or higher authority.

NAVAL SEA SYSTEMS COMMAND
WASHINGTON, D.C. 20362-5101

BIW COMPUTER CONTROLLED SHEETMETAL FABRICATOR SKETCH

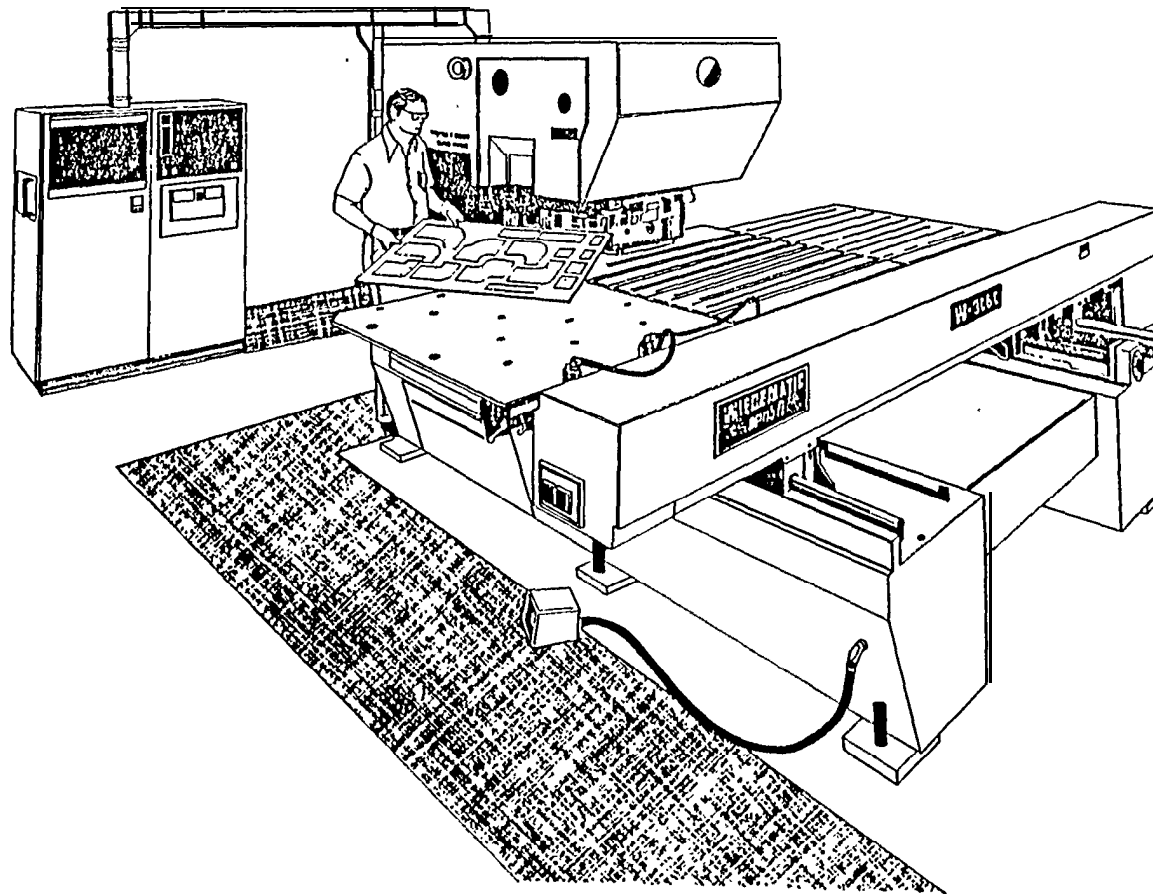


- 849 -

FIGURE 3

TYPICAL MARINE TYPE SHEETMETAL VENTILATION ASSEMBLY

-850-

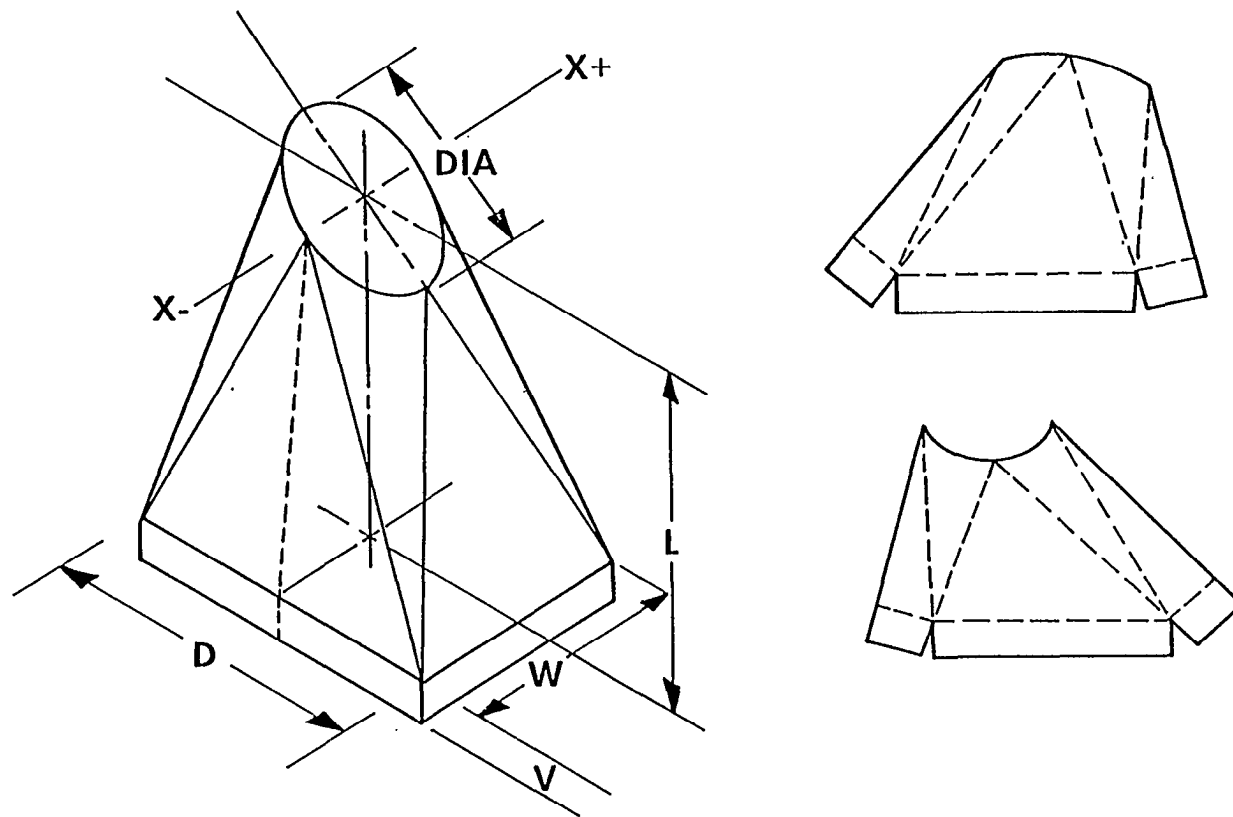

TRANSITION - RECTANGULAR TO ROUND -
SLANT TOP

FIGURE 4

GENERAL ARRANGEMENT OF ROBOTICS SHAPES PROCESSING SYSTEM



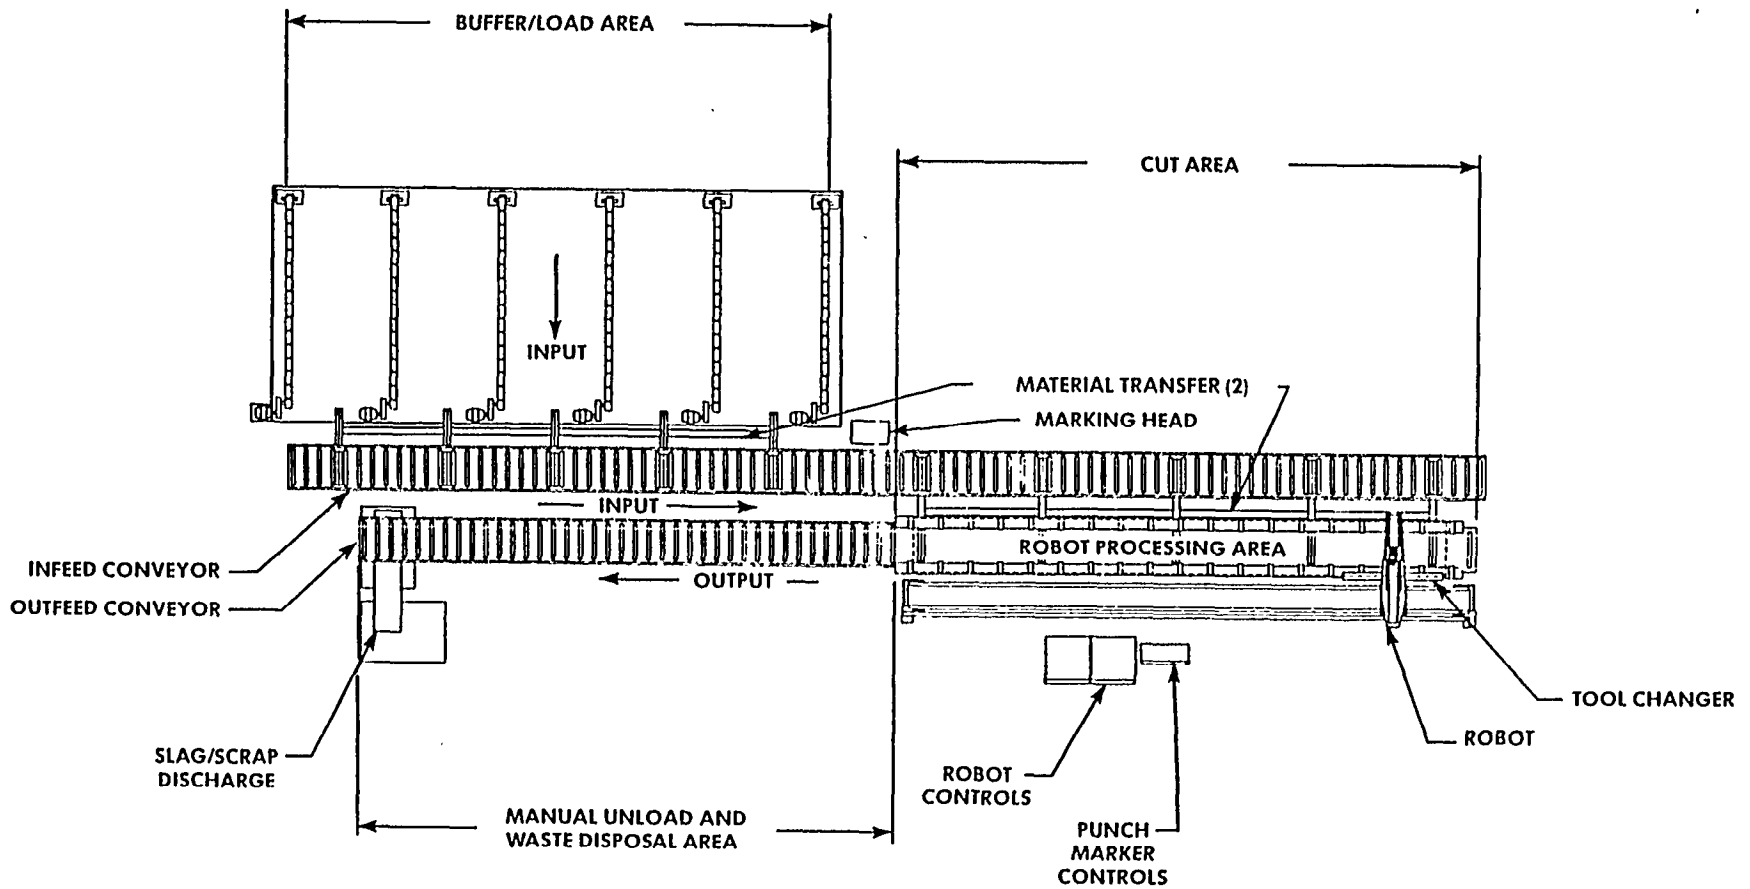


FIGURE 5


TYPICAL MARINE TYPE FABRICATED STRUCTURAL SHAPE

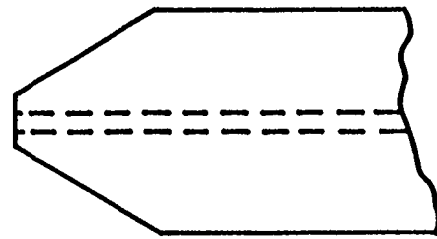

TOP VIEW



SECTION A-A

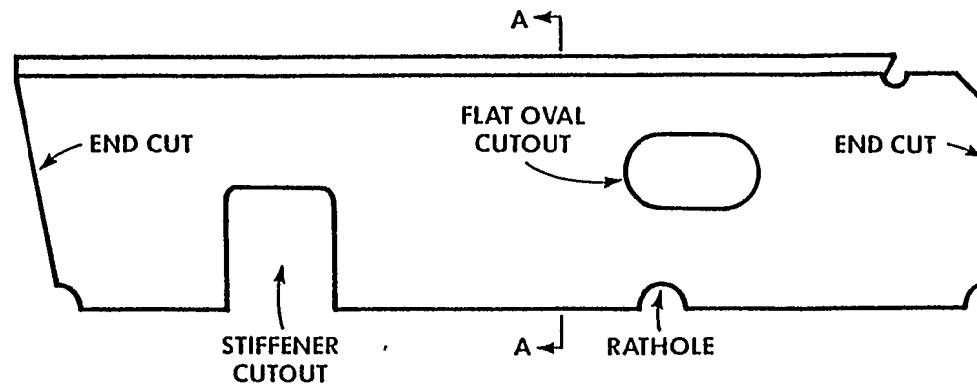

CUT TEE BAR

PRESENT AND PROPOSED SHAPES PROCESSING METHODS

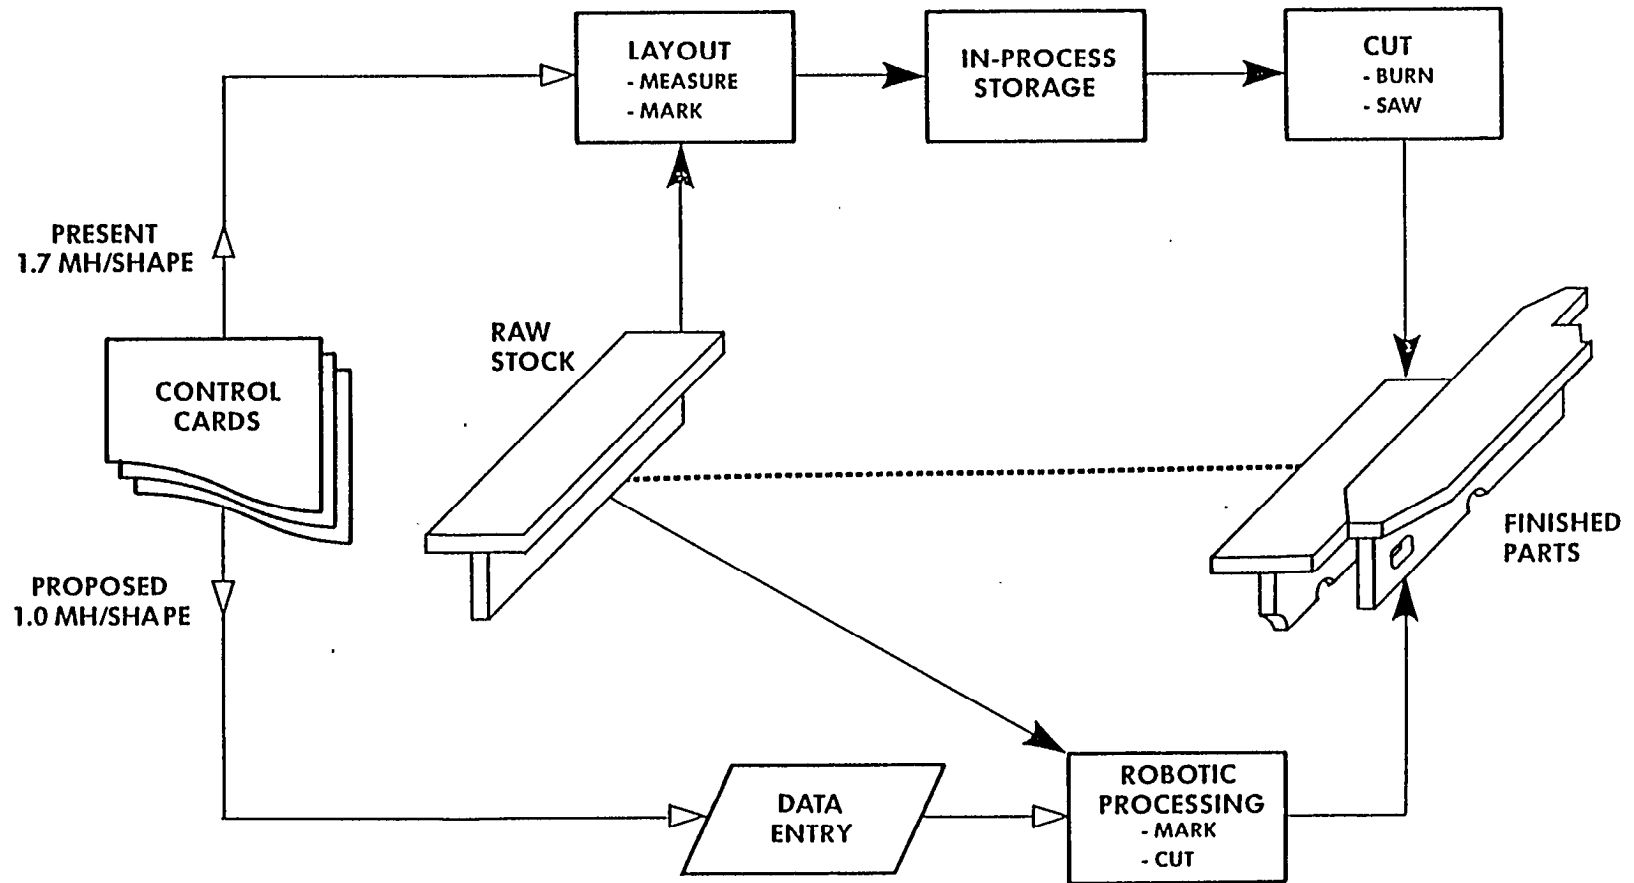


FIGURE 7

ROBOTICS SHAPES PROCESSING SYSTEM FLOW


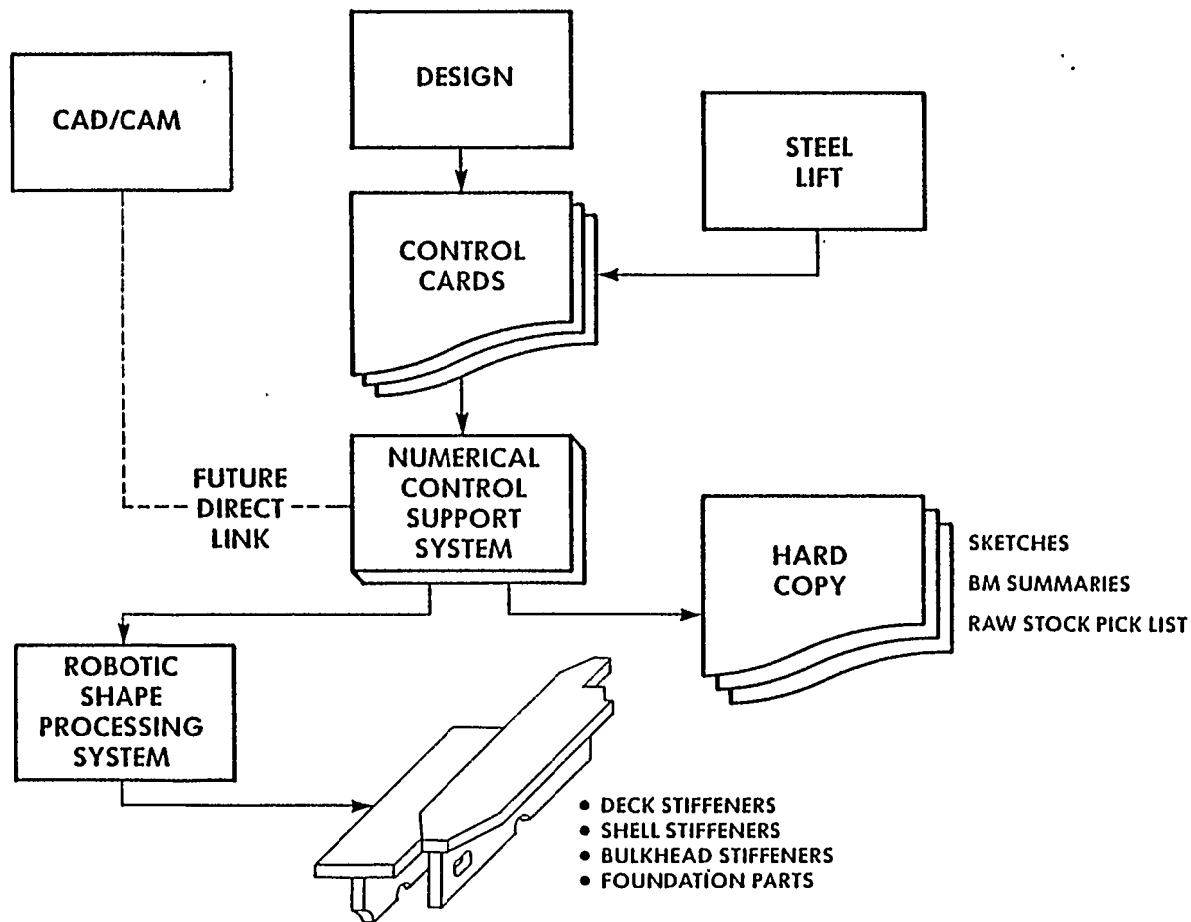


FIGURE 8


ROBOTICS SHAPES PROCESSING SYSTEM PROJECT SCHEDULE

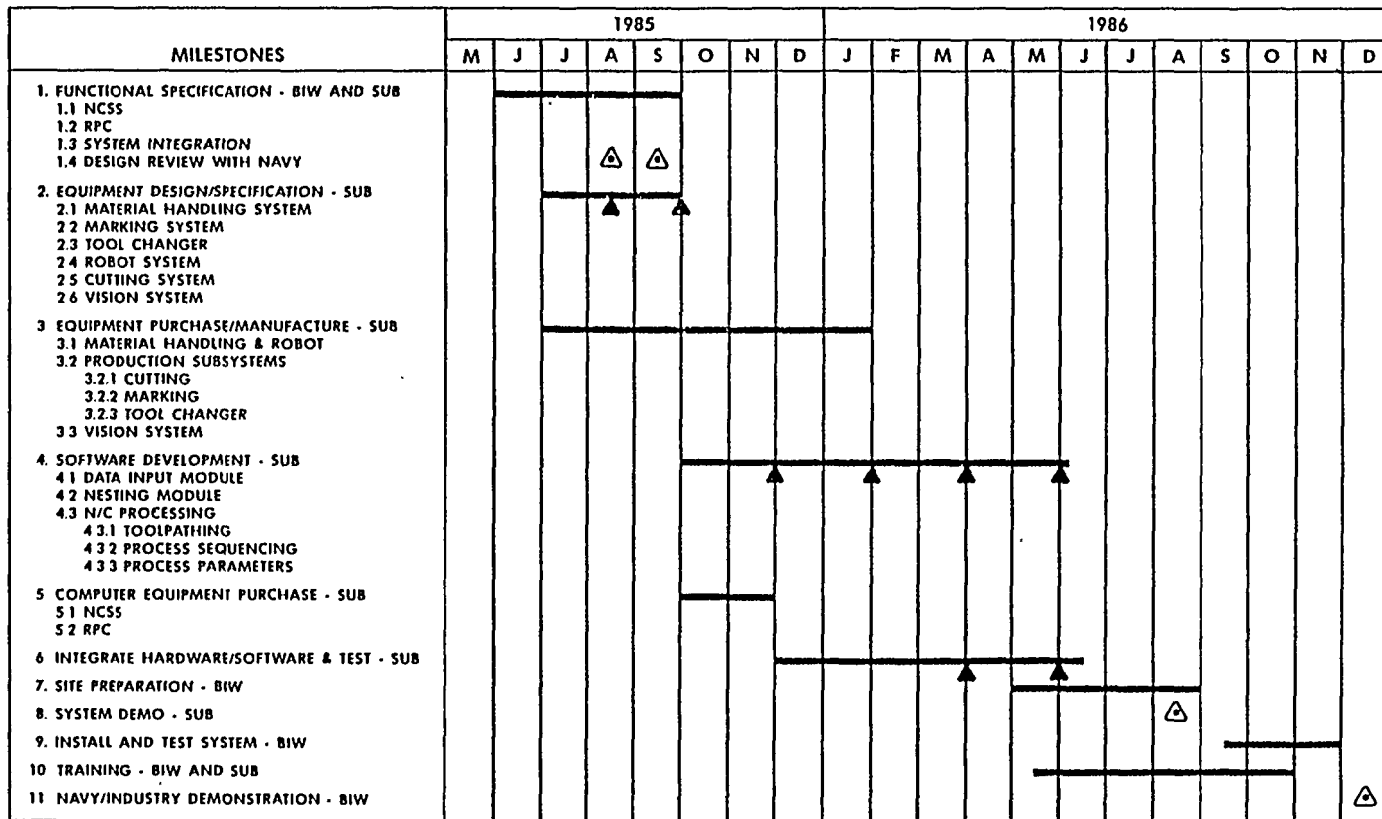

LEGEND: ▲ INTERIM DESIGN REVIEWS WITH SUBCONTRACTOR
 ▲ EVENT

FIGURE 9

ROBOTICS SHAPES PROCESSING SYSTEM PROJECT ORGANIZATION

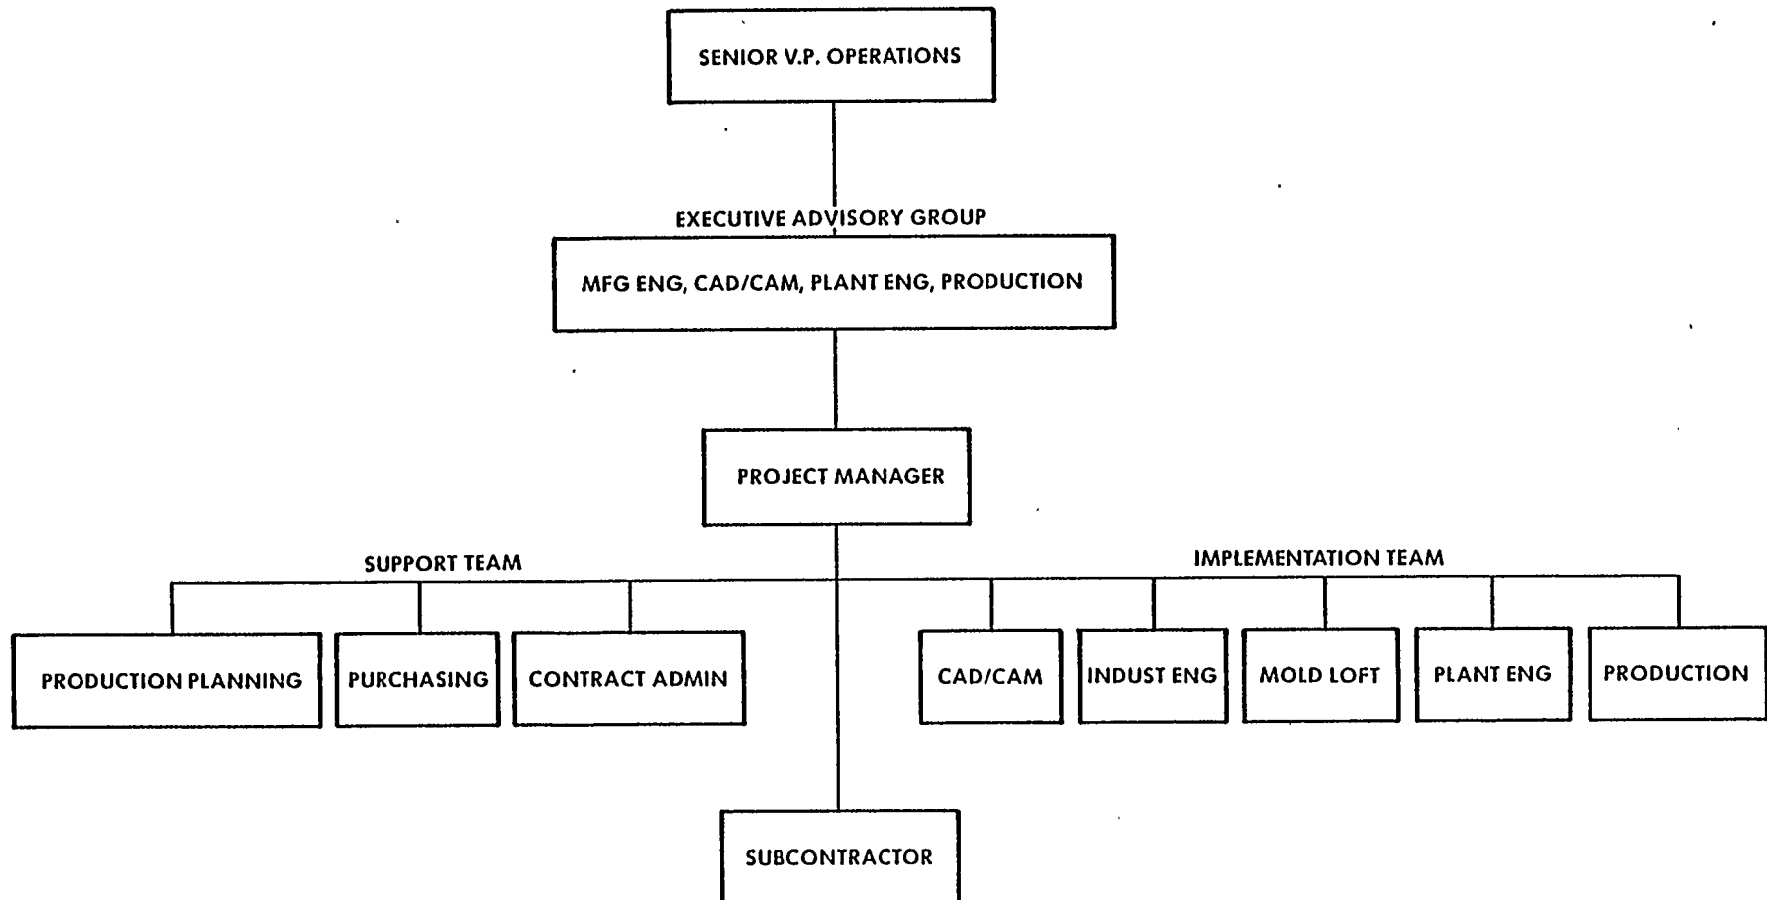

- 856 -

FIGURE 10

AVERAGE LEVELS OF TECHNOLOGY FOR THIRTEEN U.S. SHIPYARDS

STEELWORK PRODUCTION	U.S. SHIPYARDS				
	AVG.	NO. AT LEVEL			
		1	2	3	4
A1 PLATE STOCK YARD & TREATMENT	2.7	0	4	9	0
A2 STIFFENER STOCKYARD & TREATMENT	2.2	1	8	4	0
A3 PLATE CUTTING	3.5	0	0	7	6
A4 STIFFENER CUTTING	1.5	6	7	0	0
A5 PLATE & STIFFENER FORMING	2.2	1	8	4	0
A6 SUB-ASSEMBLY		2	5	6	0

OUTFIT PRODUCTION & STORES					
B1 PIPEWORK	2.0	1	11	1	0
B2 ENGINEERING	1.9	3	8	2	0
B3 BLACKSMITHS	3.9	0	0	1	12
B4 SHEETMETAL	2.1	2	8	3	0
B5 WOODWORKING	—	—	—	—	—
B6 ELECTRICAL	2.3	0	10	2	1

TABLE 1

Additional copies of this report can be obtained from the
National Shipbuilding Research and Documentation Center:

<http://www.nsnet.com/docctr/>

Documentation Center
The University of Michigan
Transportation Research Institute
Marine Systems Division
2901 Baxter Road
Ann Arbor, MI 48109-2150

Phone: 734-763-2465
Fax: 734-936-1081
E-mail: Doc.Center@umich.edu