

AD 628038



AD

Report No. SA-TRII-2643

EVALUATION OF
PRETREATMENT PROCESSES AND LONG-TERM STORAGE ON
MAGAZINE SPRING FOR THE M14, 7.62MM, RIFLE

Technical Report

300 075-73 ac
Code 7

A. H. LaRiviere

Date 1 February 1966

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

**SPRINGFIELD ARMORY
SPRINGFIELD, MASSACHUSETTS**

AVAILABILITY NOTICE.

Qualified requesters may obtain copies of this report from the Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314.

Other requesters may purchase copies of this report from the Clearinghouse, Department of Commerce, Springfield, Virginia 22151.

DISCLAIMERS.


The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The citation in this report of trade names and manufacturers does not constitute official endorsement or approval.

DISPOSITION INSTRUCTIONS.

This report is to be destroyed when it is no longer needed. It is not to be returned to the originator.

DISCLAIMER NOTICE

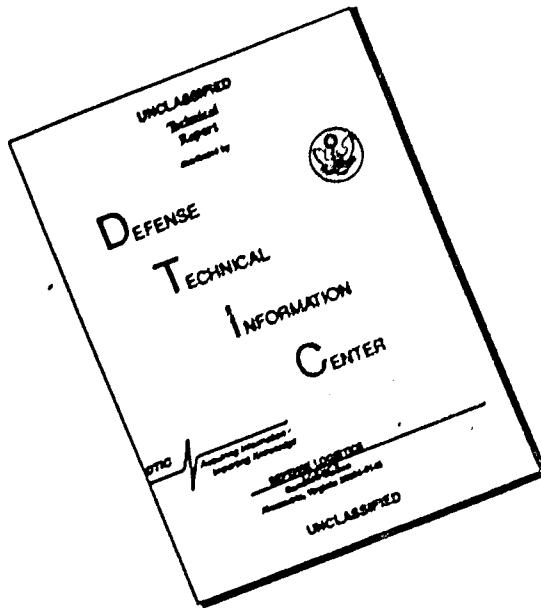

**THIS DOCUMENT IS BEST
QUALITY AVAILABLE. THE COPY
FURNISHED TO DTIC CONTAINED
A SIGNIFICANT NUMBER OF
PAGES WHICH DO NOT
REPRODUCE LEGIBLY.**

REPORT: SA-TR11-2643

DATE: 1 February 1966

AMCMS CODE: 4930.25.6271.20.01

EVALUATION OF PRETREATMENT PROCESSES AND LONG-TERM STORAGE ON
MAGAZINE SPRING FOR THE M14, 7.62MM, RIFLE

Technical Report

A. H. LaRiviere

DA PROJECT TITLE: Long-Term Storage of Loaded M14 Magazines

DA PROJECT: M1-4-23002

This TECHNICAL REPORT, to the extent known, does not contain any patentable material, copyrighted and/or copyrightable material.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED.

REPORT
SA-TR11-2643

ABSTRACT

A study was made to evaluate the effects of various pretreatment processes and long-term storage on the magazine spring for the M14, 7.62mm, rifle. The various pretreatment processes considered in this study were: (1) stress-relieving only, (2) stress-relieving and cold-set, (3) stress-relieving and heat-set, and (4) heat-set only. The storage tests involved periods from 1 to 5 years and consisted of hot, cold, and normal temperature conditions. Test procedures are described and results discussed.

**REPORT
SA-TR11-2643**

CONTENTS

	<u>Page</u>
Abstract	(i)
Subject	1
Objective	1
Conclusions	1
Recommendations	2
Introduction	4
Procedure	4
Discussion and Results	6

APPENDICES

- A - Data Charts**
- B - Illustrations (Photographs)**
- C - Illustrations (Drawings)**
- D - Distribution**

REPORT
SA-TR11-2643

SUBJECT

Evaluation of Pretreatment Processes and Long-Term Storage on Magazine Spring for the M14, 7.62MM, Rifle

OBJECTIVES

1. To determine the effects of the various pretreatment processes (heat-set, cold-set, stress-relieving only) on the subject magazine spring under storage and weapon firing test conditions (and to consider the necessity for having the heat-set notation on Drawing C-7267078 dated 18 February 1959).
2. To determine the effects of long-term storage on the subject magazine springs under the following conditions:
 - a. Normal temperature
 - b. Hot (165°F to 175°F) temperature
 - c. Cold (-65°F) temperature

CONCLUSIONS

1. The present standard spring (stress-relieving process only) indicated satisfactory results in the loaded and unloaded conditions during the storage and weapon firing test program. Resulting test data indicate that this spring assembly will meet the long-term storage requirements and function satisfactorily during weapon firing.
2. Springs which were heat-set without being stress-relieved are definitely unsuitable. (This process should not be considered in connection with any ordnance springs.)
3. The heat-setting (a costly manufacturing process) of this spring design, after stress-relieving, showed a 10 per cent increase in storage life over the present standard spring under both storage conditions. This heat-setting, however, showed no greater improvement during the weapon firing test.
4. Cold-setting (another costly process for this type of spring) showed no improvement over a plain stress-relieving operation. This is, no doubt, due to the fact that the loading of a magazine, in itself, provides an adequate cold-setting operation.

REPORT
SA-TR11-2643

CONCLUSIONS - Continued

5. Hot storage is detrimental to spring life in the loaded magazine. This condition is evident by the number of weapon malfunctions attributable to the magazine assembly (Appendix A).

6. Cold storage was not detrimental to spring in loaded or unloaded condition after one year of storage.

7. Proper packaging of the subject magazine is considered essential when the magazines are to be subjected to adverse temperature storage conditions.

8. The critical load at mean assembled height (5.5 inches) which will allow satisfactory weapon functioning is 4.5 pounds. With loads below this level, weapon malfunctioning will occur.

RECOMMENDATIONS

1. Heat-set notation as a drawing specification be removed. (Drawing C-7267078 was revised on 15 January 1960 by the elimination of the heat-set requirement.)

2. The present standard design (stress-relieving process only) of the subject magazine be considered adequate for long-term storage requirements and subsequent weapon firing.

3. The basic and most important load requirement of 5-1/2 pounds plus 3/4 pound at 5.5 inches be maintained. Two other load check-points for final-inspection acceptance, after cold-setting to 11/16 inch three times has been accomplished, are as follows:

- a. At 8.5 inches - 2.5 pounds + 3/4 pound
- b. At 2.5 inches - 8.0 pounds + 1.0 pound

4. A new lot of subject springs be processed, properly packaged and subjected to long-term storage under the following conditions:

- a. Prescribed adverse temperatures (hot and cold)
- b. Normal weather
- c. Adverse weather, i.e., snow, rain, wind, etc.

5. The design of the present standard spring not be considered the optimum design. However, based on the test results obtained, it is believed that replacement is not necessary provided the spring is properly manufactured.

REPORT
SA-TR11-2643

RECOMMENDATIONS - Continued

6. The dual-rate spring design (Appendix B) be considered if further studies are to be conducted on this type of magazine spring design because of the satisfactory preliminary results obtained at the beginning of this study.

7. The heat-setting process be considered for this type of spring only when the design stresses are greater than those presently exhibited in the standard M14 magazine assembly.

REPORT
SA-TR11-2643

1. INTRODUCTION

a. During the early manufacturing of the subject spring, questions arose primarily concerning the purpose, the need, and the cost of the heat-set specification on the subject drawing. A series of meetings were held to determine what possible design changes and what various pretreatment operations should be investigated for the best functional characteristics of the subject spring.

b. At this time, the idea of an expendable magazine was discussed and proposals of various types for this magazine assembly were submitted. Because of these proposals, the studies and the scope of the initial problems were extended to embody the effects of long- and/or short-term storage on the subject springs under conditions of normal, hot, and cold temperatures.

2. PROCEDURE

a. Forty-eight subject springs (Lot 1) were initially used at the onset of the program to examine the various pretreatment operations. When it was decided to expand the scope of the study to long-term storage, however, 100 additional springs were manufactured.

b. The initial 48 subject springs were received and processed as follows:

(1) Twenty-four, "as-wound" condition.

(a) Initial free height was recorded (all groups).

(b) Eighteen springs were stress-relieved at 400°F for 1/2 hour; this was followed by a free height and load check at assembled height of 5.5 inches.

(1) Six springs remained in as-wound condition.

(2) Six springs were cold-set to 11/16 inch three times; this cold-setting was followed by free height and load check at assembled height.

(3) Six springs were heat-set according to drawing specifications (400°F for one hour at 5 inches), this was followed by free height and load check at assembled height.

REPORT
SA-TR11-2643

2. PROCEDURE - Continued

(c) The remaining six "as-wound" springs were heat-set only according to the same drawing specification as in /b(3)/ above.

(d) The above-listed springs were then categorized in the following groups:

- (1) Stress-relieved only (Springs 1 through 6)
- (2) Stress-relieved and cold-set (Springs 7 through 12)
- (3) Stress-relieved and heat-set (Springs 13 through 18)
- (4) Heat-set only (Springs 19 through 24)

(2) Twenty-four stress-relieved and cold-set (three times to 11/16 inch) by the manufacturer were assigned as Springs 25 through 48.

(3) The springs listed above were subjected to the following test program:

- (a) Three springs from each group were gymasticated on a vertical shaper at 116 strokes per minute.
- (b) Three springs from each group were weapon-fired 2000 rounds or 100 loadings.

Exception. Three springs from the group cold-set by the manufacturer were only weapon-fired 1820 rounds or 91 loadings.

(c) The 18 remaining springs cold-set by the manufacturer were put into limited and long-term storage.

c. The 100 subject springs (Lot 2) were examined as follows:

(1) All springs were stress-relieved for 30 minutes at 400°F. Free height and incremental load measurements were taken at the specified interval of 11 inches to 5.5 inches in 1/2-inch increments.

(2) Thirty-eight springs received no further treatment (stress-relieving process only) and were tested as follows:

(a) Ten springs stored free for 24 weeks.

(b) Ten springs stored in unloaded magazine for 5 years.

REPORT
SA-TR11-2643

2. PROCEDURE - Continued

- (c) Ten springs stored in loaded magazine for 5 years.
- (d) Four springs stored unpackaged under hot temperature condition for one full year, two in loaded magazine, two in unloaded magazine.
- (e) Four springs stored unpackaged under cold temperature condition for one full year, two in loaded magazine, two in unloaded magazine.
- (3) Thirty-eight were heat-set by compression to a height of 5 inches and heated for one hour and tested in the same manner as (b) above.
- (4) Ten springs were cold-set to 11/16 inch three times. Eight of the springs were subjected to hot and cold temperature storage test as in (2) above.
- (5) The remaining 14 subject springs received no further treatment and were not involved in any type of test.

3. DISCUSSION AND RESULTS

a. The test program involving the initial 48 subject springs was set up to evaluate the following four pretreatment processes under various test procedures: stress-relieving only, stress-relieving and cold-set, stress-relieving and heat-set, and heat-set only.

- (1) Gymnasticating tests were performed on 15 subject springs (three springs from each treatment). The test consisted of the following:
 - (a) Initial free height and load check at assembled height of 5.5 inches.
 - (b) Free height and load check after 5, 55, 155, 655, 1655, 3655, 6655, and 10,000 cycles for all springs. A few of the springs were cycled additionally as shown in the resulting data given in Appendix A.
 - (c) Gymnastication was performed on a vertical shaper at 116 strokes/minute.
 - (d) Sample springs used in this test are shown in photographs included in Appendix C. In all instances, the springs were badly distorted after the test.

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

- (e) This type of test is much more severe than the test under which the magazine springs are tested during actual weapon firing and storage test. It was felt, therefore, that if the springs could withstand this testing, they could satisfactorily meet weapon functioning requirements. Since all of the springs were badly distorted, it was concluded that this was not a true type of test to prove the value of the subject springs.
- (f) Resulting data show (Appendix A) that most of the springs, with the exception of the heat-set only springs, although distorted, were within the critical load-specification considered necessary for satisfactory weapon firing.

Note 1. Critical load-specification is 4.5 pounds at 5.5 inches and will be discussed later in the report.

Note 2. The heat-set only springs were well below this critical load and it was concluded that this particular process not be considered for future ordnance use.

- (2) Weapon firing tests were conducted on 15 subject springs (three springs of each group) and consisted of the following:

- (a) Initial free height and load check at assembled height of 5.5 inches.
- (b) Load and free height check after weapon firing 1, 5, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100 loadings (one loading - 20 rounds).

Exceptions:

- (1) Springs heat-set only were not tested because the permanent set was excessive; this condition occurred when a static load-check was performed.
 - (2) Springs cold-set by manufacturer were checked after the following loadings: 5, 23, 28, 34, 40, 46, 52, 58, 64, 76, and 91.
- (c) Resulting data are shown in Appendix A.

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

- (d) Sample springs used in this test are shown in photographs in Appendix C.
 - (e) No malfunctions were attributable to the magazine spring assemblies, as reported by testing personnel. In fact, all springs functioned satisfactorily. Proper manufacture of the stress-relieved only springs will produce an M14 magazine spring which will function satisfactorily.
- (3) A limited and long-term storage-program was conducted on 18 of the subject springs cold-set by a manufacturer as follows:
- (a) Eight springs stored in an unloaded magazine condition (Springs 31 to 34, 40 to 43).
 - (b) Ten springs stored in a loaded magazine condition (Springs 35 to 39, 44 to 48).
 - (c) The following free height and load check at 5.5 inches were performed during the course of the test:
 - (1) All springs initially.
 - (2) All springs after 2-month storage.

NOTE:

Springs 31, 32, 33, 37, 38, and 39 were not returned to storage after this check.

- (3) Springs 40 to 43 after 15 weeks, then subjected to 50 magazine-loadings, rechecked, and returned to storage.
- (4) Springs 34, 35, 36, 44 to 48, after 17 weeks.

NOTE:

Springs 44, 46, 48 were not returned to storage.

- (5) All springs still in storage were checked after 41 weeks and 1-1/2 years.
- (6) Storage springs were subjected to six weapon-loadings.
- (7) Storage springs were then subjected to a final incremental load-check at 11 inches to 1 inch.

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

- (d) This cold-setting test shows that springs stored in a loaded condition for any length of time will exhibit an average set of 11 per cent below the minimum load-specification, but will still function satisfactorily during single weapon-loading.
 - (e) Resulting data obtained during this test phase is shown in Appendix A.
 - (f) Sample springs used in this test are shown in photographs in Appendix C.
- (4) The average results obtained during this phase of the evaluation are shown on the following page in Table I.

REPORT

IA-TR11-2643

Test	Procedure	stress-Relieved Only		stress-Relieved and Cold-set by Manufacturer		Heat-set Only		
		Cold-set	Heat-set	Cold-set	Heat-set	Cold-set	Heat-set	
Original		9.6	-	9.3	6.0	9.6	-	
After Heat-set	-	-	-	-	-	5.75	4.0	
After Cold-set	-	6.25	6.25	6.25	6.0	5.75	4.1	
Gymnasticating Test	5 Cycles	6.5 155 655 1655 3655 6655 10000	6.5 6.5 6.4 6.3 6.1 6.0 5.4	6.1 6.1 6.1 6.1 6.0 6.0 5.7	6.0 5.75 5.75 5.75 5.6 5.6 5.3	5.75 5.75 5.75 5.75 5.6 5.6 5.1	4.1 4.1 4.1 4.1 4.0 4.0 3.75	
Original		9.6	-	9.3	6.0	9.6	-	
After Heat-set	-	-	-	-	-	5.75	4.0	
After Cold-set	-	6.25	6.25	6.25	6.0	5.75	-	
Weapon Firing Test	10-10	6.75 10 20 30 40 50 60 70 80 90 100	6.4 6.3 6.3 5.75 5.75 5.75 5.75 5.75 5.6 5.6 5.6	(5) (23) (28) (34) (40) (46) (52) (58) (64) (76) (91)	5.3 5.0 5.0 4.9 4.9 4.8 4.8 4.75 4.75 4.6 4.6	5.75 5.6 5.6 5.4 5.4 5.3 5.25 5.25 5.25 5.2	NO TESTING ON THESE SPRINGS; BECAUSE OF LOW LOADS	
Limited Storage Test	1-1/2 Years	6 Weeks 17 Weeks 41 Weeks	6 Weeks 17 Weeks 41 Weeks	6.3 4.9 4.75	4.6 4.6 4.6	TABLE I	AVERAGE RESULT - Lot 1	
Original		6.3	6.1	6.1	5.6	5.5	5.4	
8 Weeks		6.3	6.1	6.1	5.6	5.5	5.4	
15 Weeks		6.3	6.1	6.1	5.6	5.5	5.4	
30 Loadings		6.3	6.1	6.1	5.6	5.5	5.4	
41 Weeks		6.3	6.1	6.1	5.6	5.5	5.4	
1-1/2 Years	Six Weapon Loading	6.3	6.1	6.1	5.6	5.5	5.4	
Original		6.3	6.1	6.1	5.6	5.5	5.4	
8 Weeks		6.3	6.1	6.1	5.6	5.5	5.4	
15 Weeks		6.3	6.1	6.1	5.6	5.5	5.4	
30 Loadings		6.3	6.1	6.1	5.6	5.5	5.4	
41 Weeks		6.3	6.1	6.1	5.6	5.5	5.4	
1-1/2 Years	Six Weapon Loading	6.3	6.1	6.1	5.6	5.5	5.4	

NOTE: All above readings are in pounds

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

b. The 100 subject springs obtained for the long- and/or short-term storage condition were all stress-relieved for 30 minutes at 400°F. Free height and incremental load measurements were then taken at 11 inches to 5.5 inches in 1/2-inch increments. All springs were well above drawing specification after this operation. This is conducted to allow for load and height losses which were incurred after further processing or treatment.

- (1) Springs 1 through 30 received no further treatment or processing, and were tested as follows:

- (a) Ten springs stored free for 24 weeks.

- (1) Free heights and incremental load measurements were taken at specified intervals (11 inches to 1 inch at 1/2-inch increments).
(2) Checks were made after 1, 8, 16, and 24 weeks.
(3) From results obtained after 24 weeks, further testing for this condition was considered unnecessary.

- (b) Ten springs stored in unloaded magazine for 5 years.

- (1) Free heights and incremental load measurements were taken at specified intervals of 11 inches to 5.5 inches at 1/2-inch increments before weapon firing test and after the 1-, 2-, 3-, and 5-year storage test and also before one dummy loading at 24 weeks. An incremental load measurement of 11 inches to 1 inch at 1/2-inch increments was then taken after weapon-firing and dummy-loading tests.
(2) Checks were made after 1, 2, 4, 8, 12, 16, 24, and 48 weeks; and after 1, 2, 3, and 5 years storage.
(3) Springs were never compressed beyond 5.5 inches during the 24-week storage.

- (c) Ten springs stored in a fully loaded magazine for 5 years.

- (1) Free height and incremental load measurements were taken at specified intervals of 11 inches to 1 inch at 1/2-inch increments.
(2) Checks were made after 1, 2, 4, 8, 12, and 16 weeks.

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

- (3) Checks were made before and after dummy loading at 24 weeks and weapon firing test at 48 weeks, 1, 2, 3, and 5 years.
- (2) Springs 31 through 60 were then heat-set by compression to a height of 5 inches and heated at 400°F for one hour. Similar test procedure as in (1) above were then conducted for these subject springs, i.e., free, unloaded and loaded.
- (3) Springs 61 through 70 were then cold-set by compression to a height of 11/16 inch three times and an average result of 6.2 pounds was obtained. Storage tests as above were not performed on these springs and were not considered necessary because of the results obtained during the testing of the initial 48 springs. Eight of these springs, however, were later used during the temperature (hot and cold) test.
- (4) Springs 63 through 86 were used in the hot and cold temperature storage test which will be discussed later.
- (5) Springs 87 through 100 were subjected to no further testing.
- (6) The 40 springs heat-set and stress-relieved only, which were subjected to the long-term storage program, were examined as follows after 1, 2, 3, and 5 years:
 - (a) Free height
 - (b) Loaded magazines. Incremental load measurements (11 inches to 1 inch at 1/2-inch increments)
 - (c) Unloaded magazines. Incremental load measurements (11 inches to 5.5 inches at 1/2-inch increments)
 - (d) Free height
 - (e) Weapon test-fired. Six loadings for each magazine (120 rounds)
 - (f) Free height
 - (g) Incremental load measurements (11 inches to 1 inch at 1/2-inch increments) for all subject springs.

3. DISCUSSION AND RESULTS - Continued

(h) Free height

(i) The following subject springs were used in the above-mentioned test:

- (1) Ten stress-relieved only loaded springs 11 - 20
- (2) Ten stress-relieved only unloaded springs 21 - 30
- (3) Ten stress-relieved and heat-set loaded springs 41 - 50
- (4) Ten stress-relieved and heat-set unloaded springs 51 - 60

(j) The following average results (Table II) were obtained.

(7) The average results and percentages obtained during the testing of the subject springs 1 through 70 are shown in Tables III and IV which follow.

TABLE II
STORAGE TESTS

<u>Storage Condition</u>	<u>Process</u>	<u>Original</u>	<u>Heat-Set</u>	<u>One Year plus</u>	<u>Two Years plus</u>	<u>Three Years plus</u>	<u>Five Years plus</u>
				<u>Weapon Loading</u>	<u>Weapon Loading</u>	<u>Weapon Loading</u>	<u>Weapon Loading</u>
Loaded	Stress-Relieved Only	9.5	-	4.8	4.6	4.6	4.6
Unloaded	Stress-Relieved Only	9.5	-	5.6	5.25	5.25	5.1
Loaded	Stress-Relieved and Heat-Set	9.5	7.1	5.25	5.0	5.0	4.9
Unloaded	Stress-Relieved and Heat-Set	9.4	7.2	5.8	5.5	5.5	5.5

No weapon malfunction attributable to the subject springs was reported by testing personnel.

The results obtained for the long-term storage springs are shown in the graph following this table.

NOTE : All above readings in pounds.

LONG-TERM STORAGE PROGRAM
AVERAGES

REPORT
SA-TR11-2643

- ✖ - Stress-relieved, loaded
- - Stress-relieved, unloaded
- - Stress-relieved and heat-set, loaded
- △ - Stress-relieved and heat-set, unloaded

DRAWING LIMITS

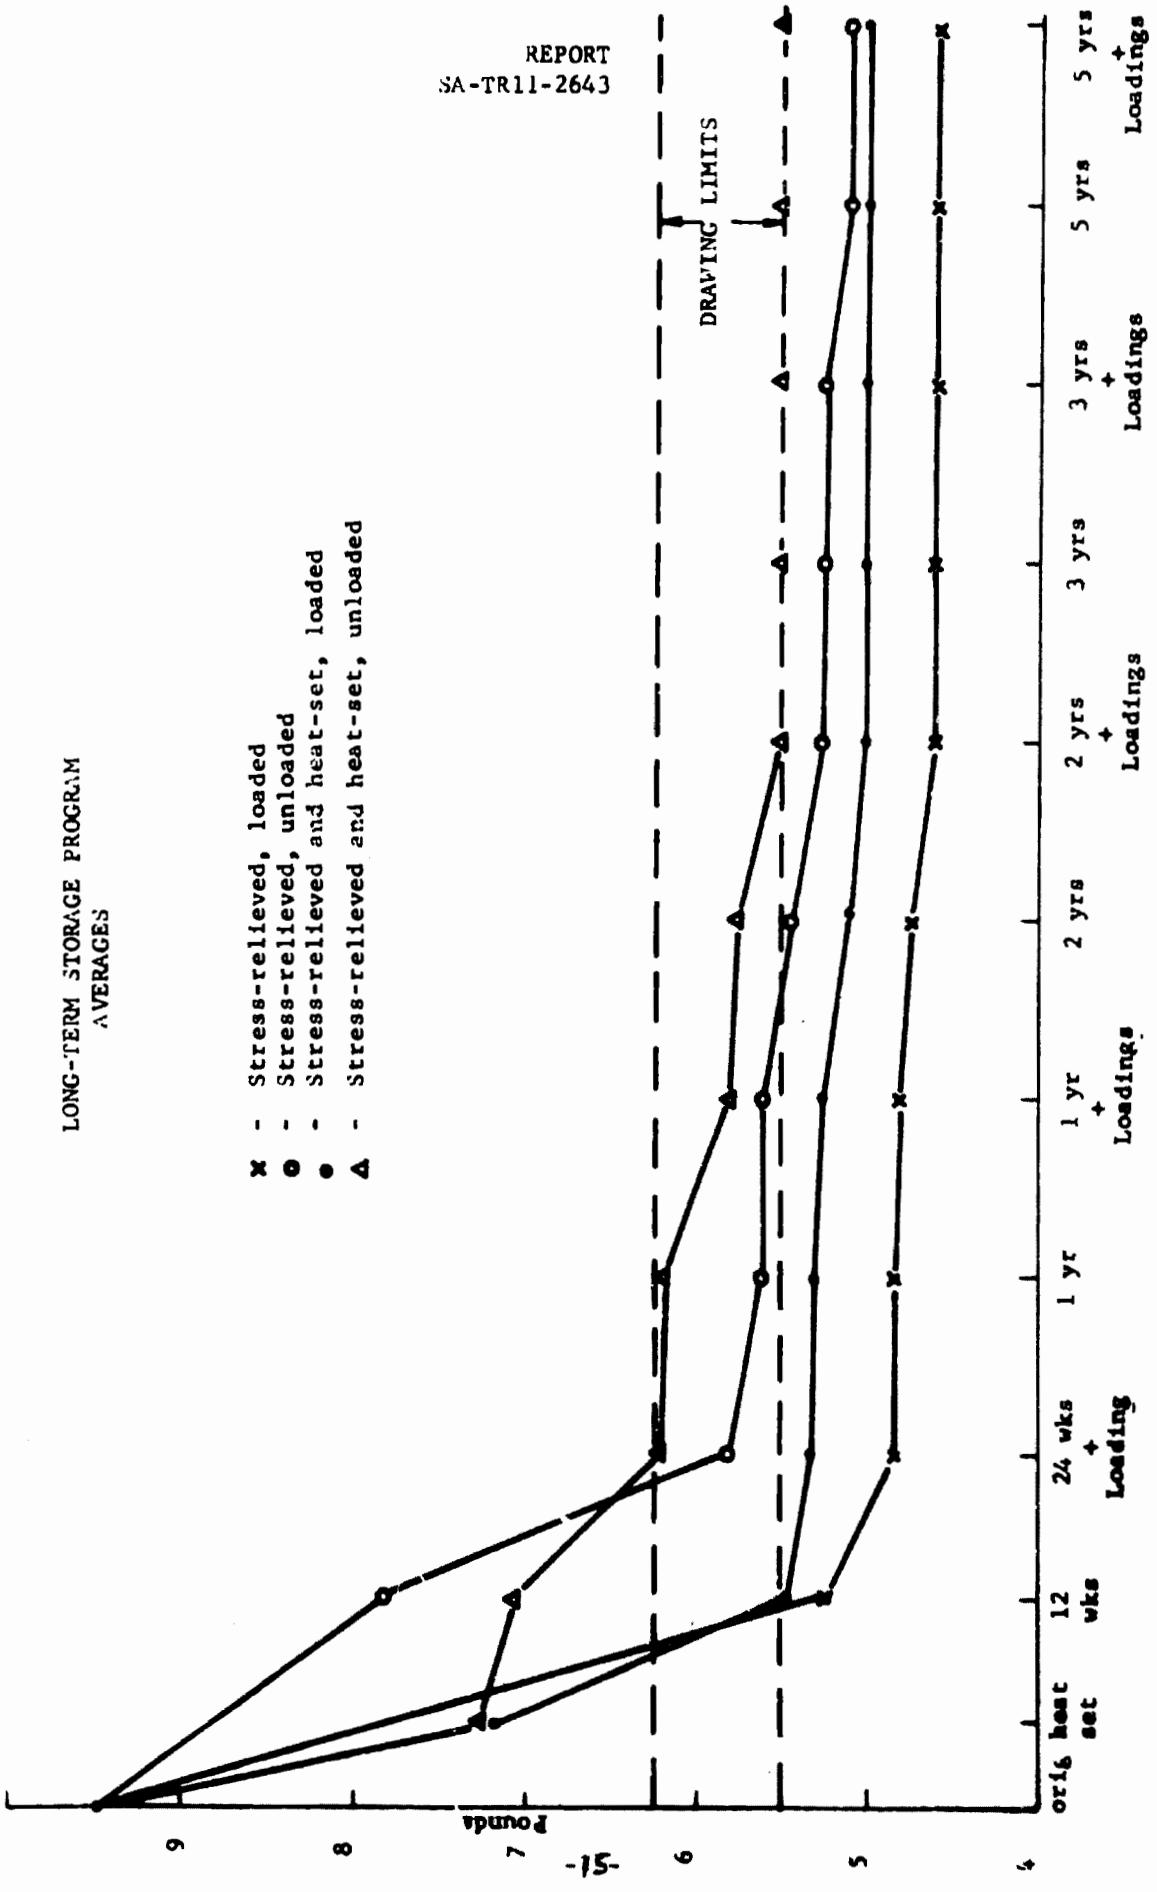


TABLE III
STORAGE TEST (Average Load)

Length of Storage and Weapon Test	Free	Loaded		Unloaded	
		Stress- Relieved and Heat-Set	Stress- Relieved	Stress- Relieved and Heat-Set	Stress- Relieved
Original	9.4	9.5	9.5	9.6	9.5
After Heat-Set Operation	-	7.2	-	7.1	-
Before Storage	6.75	7.2	9.5	7.1	9.5
1 Week	6.5	6.5	5.4	5.9	8.5
2 Weeks			5.4	5.75	8.25
4 Weeks			5.3	5.75	7.9
8 Weeks	6.4	6.4	5.3	5.5	7.8
12 Weeks			5.2	5.4	7.75
16 Weeks	6.3	6.3	5.0	5.3	7.6
24 Weeks	6.25	6.25	4.8	5.3	7.5
One Loading					7.0
48) Combo			4.8	5.3	5.8
52)					6.25
Seven Loadings			4.8	5.25	5.6
2 Years and Loading			4.6	5.0	5.25
3 Years, 19 Loadings			4.6	5.0	5.25
5 Years, 25 Loadings			4.6	4.9	5.1

NOTE: All above readings are in pounds

REPORT

SA-TR11-2643

TABLE IV
PERCENTAGES

<u>Process</u>	<u>Condition</u>	<u>Time</u>	<u>Original Loads</u>	<u>Load After Heat-Set</u>	<u>Load Per Cent Loading</u>	<u>Load Per Cent After One Loading</u>	<u>Final Load Per Cent</u>
Stress-Relieved Only	Free	24 weeks	9.4	-	-	6.75	28
	Loaded	5 years	9.5	-	-	5.4	13*
	Unloaded	5 years	9.5	-	-	5.8	43
Stress-Relieved and Heat-Set	Free	24 weeks	9.5	7.2	24	7.2	-
	Loaded	5 years	9.6	7.1	26	7.1	-
	Unloaded	5 years	9.5	7.2	24	6.25	13**

*This percentage loss was based on use of the cold-set spring load of 6.2 pounds as the standard for the stress-relieved only springs.

**This percentage loss was determined from load obtained after the heat-set process, i.e., 7.2 pounds.

NOTE: The 3/4-pound tolerance for the load specification of 5.5 + 3/4 give a 12 per cent loss.

NOTE: All above readings are in pounds

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

c. A test was also conducted to determine the effects of long- and/or short-term storage under hot (165°F to 175°F) and cold (-65°F) temperature conditions on the subject magazine springs. (Temperatures comply with military standard specification MIL-E-4970).

- (1) Twenty-four of the subject springs from Lot 100 were used in this test program and were stored for one year in an unpackaged condition. Packaging procedures were not accomplished because the springs were to be examined at various intervals during the storage programs as specified below.
- (2) The subject springs were processed as follows:
 - (a) Eight springs stress-relieved and cold-set (Springs 63 through 70)
 - (b) Eight springs stress-relieved and heat-set (Springs 71 through 78)
 - (c) Eight springs stress-relieved only (Springs 79 through 86)
 - (d) Two springs of each group were then stored loaded and unloaded at the two temperature conditions.
- (3) The subject springs were then tested as follows for both temperature conditions:
 - (a) Unloaded magazine assembly
 - (1) Free height check
 - (2) Load check at 8.5 and 5.5 inches
 - (3) Springs were checked after 2, 4, 6, 8, 10, 14, 20, 24, 36, and 52 weeks.
 - (b) Loaded magazine assembly
 - (1) Same test procedure as above for items (1) and (3).
 - (2) Load check at 5.5 and 2.5 inches.

REPORT
SA-TR11-2643

3. DISCUSSION AND RESULTS - Continued

- (c) All springs were subjected to six weapon loadings after the one full year storage.
- (d) All springs were given an incremental load and free height check after weapon firing only.
- (4) The average results obtained during the storage test are shown in Table V which follows. Data are shown demonstrating that the springs stored loaded under hot temperature conditions caused weapon malfunction and also that this temperature condition was very detrimental to spring life.

Note. It is felt that, if proper packaging is accomplished, better results under similar conditions may be obtained.

d. The results obtained throughout this investigation indicate that a 4.5 load at 5.5 inches (assembled magazine height) is considered a critical dimension. Loads which fall below this dimension will cause weapon malfunctioning. Therefore, a chart for an inspection acceptance load check was prepared and recommended. This chart can be found on Page 21, Table VI.

TABLE V

TEMPERATURE TEST (Average)

	Hot						Cold					
	Unloaded			Loaded			Unloaded			Loaded		
	P ₁	P ₂	P ₃	P ₂	P ₃	P ₁	P ₂	P ₃	P ₂	P ₃	P ₂	P ₃
Stress-Relieved and Cold-Set	Original	3.0	6.3	6.25	9.4	2.9	6.2	6.2	4.8	9.3	4.8	9.3
	52 Weeks	2.25	5.5	3.6	6.6	2.6	5.8	5.6	4.75	7.4	5.2	7.4
	After Weapon Loading	2.25	5.5	3.5	6.5	2.6	5.6	5.6	4.75	7.4	5.2	7.4
	Total Loss	.75	.8	2.75	2.9	.3	.6	.6	1.45	1.9	1.45	1.9
	Per Cent Loss	25	12.7	44	31	10.3	9.7	10.3	23.4	20.4	23.4	20.4
	Original	3.5	7.0	7.5	10.3	3.75	7.3	7.3	7.2	10.5	7.2	10.5
Stress-Relieved and Heat-Set	52 Weeks	3.25	6.6	4.0	7.0	3.5	6.75	6.75	5.2	7.9	5.2	7.9
	After Weapon Loading	3.1	6.1	3.9	7.0	3.0	6.0	6.0	5.2	7.8	5.2	7.8
	Total Loss	.4	.9	3.6	3.3	.75	1.3	1.3	2.0	2.7	2.0	2.7
	Per Cent Loss	11.4	12.9	48	32	20	17.8	17.8	27.8	25.7	27.8	25.7
	Original	6.5	9.6	9.6	11.8	6.5	9.75	9.75	9.75	11.9	9.75	11.9
	52 Weeks	4.1	7.3	3.75	6.75	4.0	7.25	7.25	5.1	7.6	5.1	7.6
Stress-Relieved Only	After Weapon Loading	3.0	6.1	3.6	6.6	3.25	3.65	3.65	4.65	4.3	4.65	4.3
	Total Loss	3.5	3.5	6.0	5.2	3.25	3.65	3.65	4.65	4.3	4.65	4.3
	Per Cent Loss	53.8	36.5	62.5	44	50	37.4	37.4	47.7	36.1	47.7	36.1

P₁ - Load taken at 8.5
P₂ - Load taken at 5.5
P₃ - Load taken at 2.5


P₁ and P₂ - Unloaded Magazine
P₂ and P₃ - Loaded Magazine

NOTE: All above readings are in pounds

TABLE VI

M16, 7.62mm, M14, SPRING, N.G., INL (L-7267078)
ACCEPTANCE LOAD CHECK

REPORT
S-TRII-2643

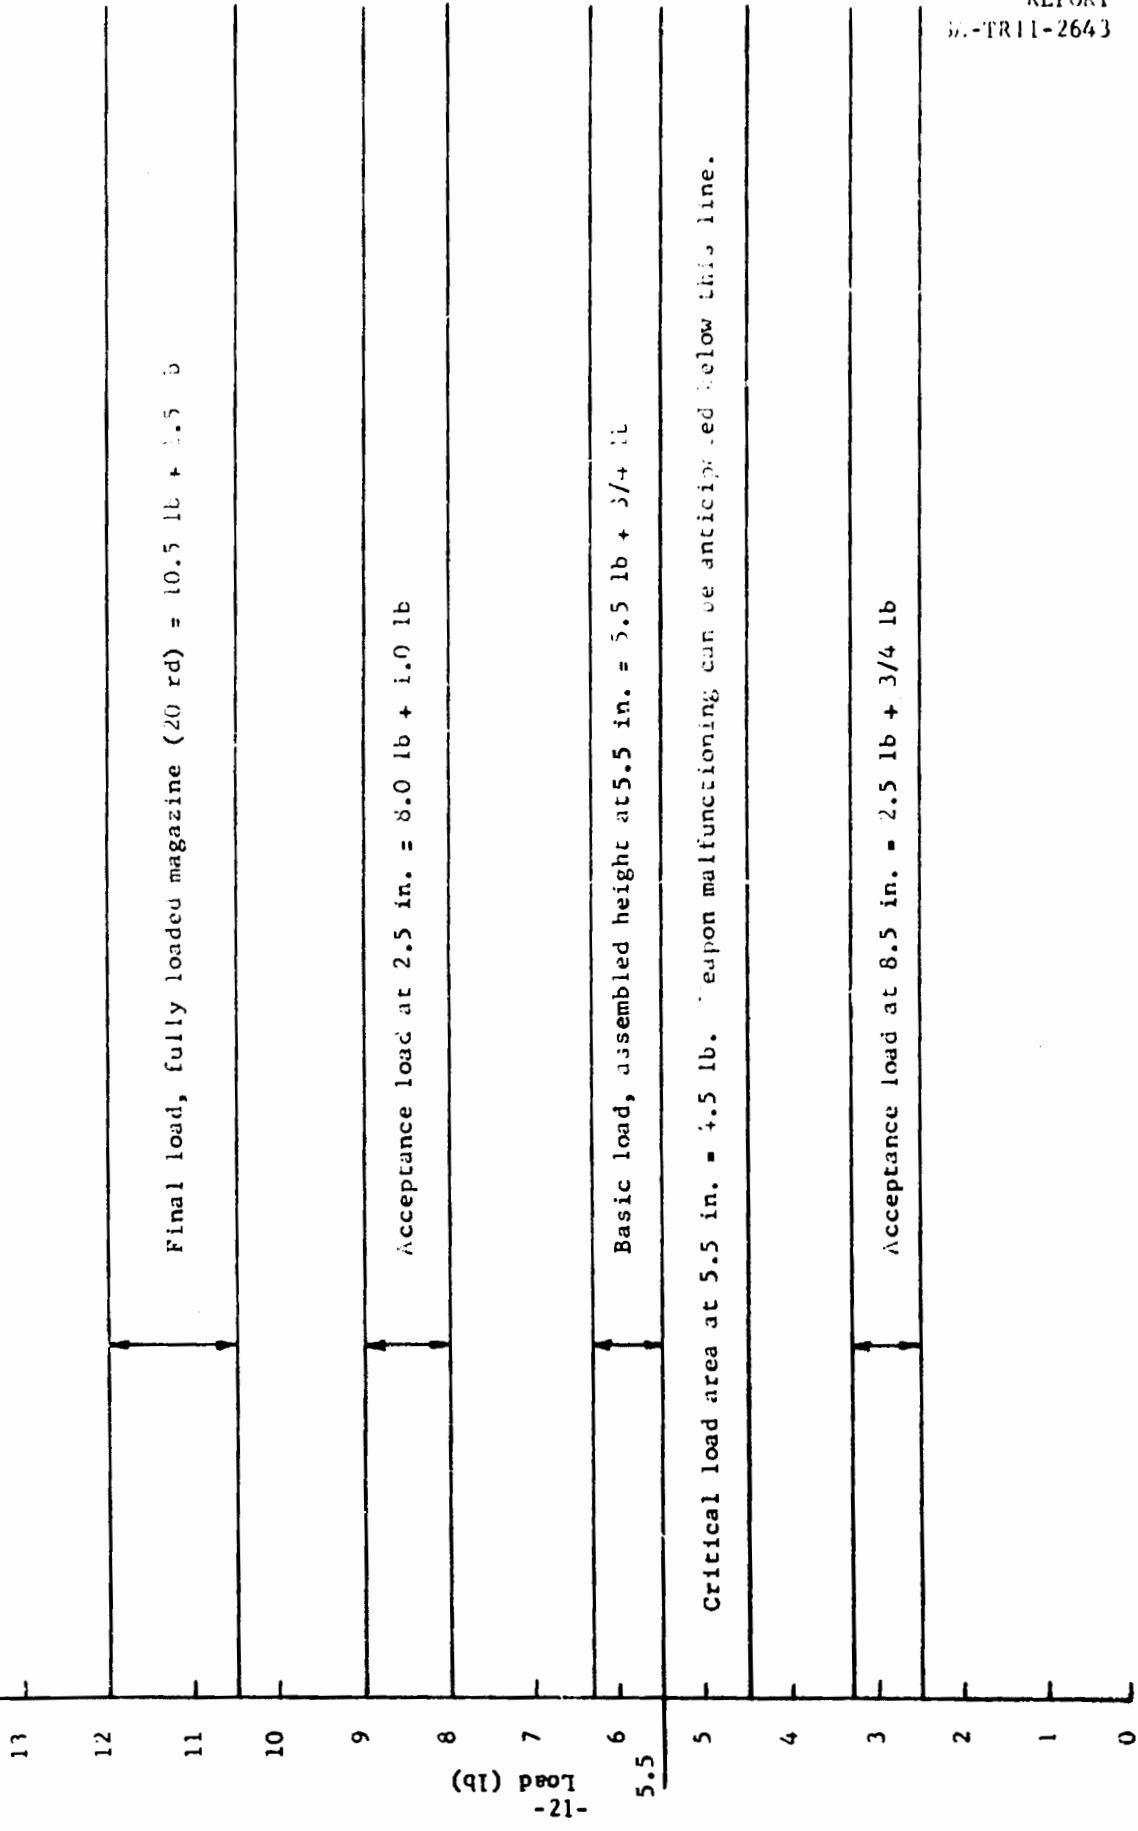

REPORT
SA-TR11-2643

4. OTHER TESTS

a. It should be point out here that other tests in conjunction with this evaluation were initially conducted on experimental spring designs such as the following:

- (1) Standard plus one coil (modified)
- (2) Dual-rate design (SAC-38193, Appendix B)

b. Results revealed that the modified design (9 coils) indicated no improvement over the standard spring in either long-term storage or functional firing. Therefore, this design was not considered further. The dual-rate springs test results obtained under storage and weapon firing test were satisfactory. The principle of the utilization of the entire tube space for the magazine spring is basically sound. This allows for more uniform action of the spring follower throughout the compression stroke than with the standard spring. Since further dimensional studies were necessary to eliminate a frictional bind which occurred after a follower deflection of approximately 4 inches, this experimental design was not considered further in the test program.

APPENDICES

**REPORT
SA-TR11-2643**

A - Data Charts (28)

**B - Illustrations
(Drawings, 4)**

**C - Illustrations
(Photographs, 7)**

D - Distribution

**REPORT
SA-TR11-2643**

APPENDIX A

LOT 48 SPRINGS

- a. Gymnastication Test**
- b. Weapon Firing Test**
- c. Limited Storage Test**

LOT 100 SPRINGS

- a. Long-Term Storage Test (5 years)**
- b. Hot-Temperature Test (1 year)**
- c. Cold-Temperature Test (1 year)**

RIFLE, 7.62MM M14 SPRING, MAGAZINE (C-7267078)
GYMNASТИCATING TEST

APPENDIX A

SPRING NUMBER	SPRING NUMBER	A			B			C			5 CYCLES			55 CYCLES			155 CYCLES			655 CYCLES			3655 CYCLES			6655 CYCLES			10,000 CYCLES				
		H _F	P _I	H _F	H _F	P _I																											
4	14.42	14.41	9.5	14.00	-	-	-	11.83	6.5	11.79	6.5	11.70	6.5	11.66	6.5	11.61	6.4	11.43	6.2	11.37	6.1	10.31	5.1										
5	14.40	14.41	9.5	14.05	-	-	-	11.86	6.5	11.73	6.5	11.66	6.5	11.61	6.5	11.59	6.2	11.52	6.1	11.49	6.1	11.33	5.75										
3	14.46	14.43	9.25	14.15	-	-	-	11.75	6.5	11.68	6.5	11.57	6.5	11.45	6.25	11.40	6.2	11.36	6.0	11.31	5.75	5.6	3.9										
10	14.56	14.56	9.5	14.25	11.80	6.25	11.78	6.25	11.75	6.25	11.72	6.25	11.62	6.25	11.59	6.25	11.56	6.1	11.55	6.1	11.41	5.9	11.31	5.9									
11	14.52	14.49	9.25	14.06	11.63	6.25	11.62	6.25	11.56	6.25	11.54	6.0	11.44	6.0	11.41	6.0	11.37	5.9	11.35	5.7	11.31	5.9	11.31	5.9									
12	14.40	14.40	9.75	14.13	11.65	6.25	11.64	6.25	11.62	6.25	11.53	6.25	11.50	6.25	11.43	6.25	11.40	6.1	11.36	5.6	10.93	5.6	10.31	5.25									
16	14.51	14.40	9.75	14.15	10.95	5.75	10.87	5.75	10.84	5.75	10.84	5.75	10.79	5.75	10.76	5.75	10.75	5.75	10.75	5.75	10.31	5.25											
17	14.53	14.55	9.50	14.33	10.99	6.0	10.91	5.75	10.89	5.75	10.88	5.75	10.86	5.75	10.83	5.75	10.82	5.6	10.80	5.6	10.27	5.1	10.27	5.1									
15	14.38	14.42	9.75	14.14	10.98	5.75	10.93	5.75	10.91	5.75	10.90	5.75	10.89	5.75	10.85	5.75	10.84	5.6	10.67	5.5	10.28	4.75											
22	14.30	-	-	9.33	4.0	9.24	4.0	9.24	4.0	9.24	4.0	9.21	4.0	9.20	4.0	9.20	3.9	9.20	3.8	8.91	3.25												
23	14.57	-	-	9.43	4.3	9.41	4.25	9.41	4.25	9.40	4.25	9.39	4.25	9.37	4.2	9.30	4.1	9.20	4.1	9.20	3.9	9.20	3.75										
24	14.36	-	-	9.33	4.0	9.31	4.0	9.31	4.0	9.28	4.0	9.28	4.0	9.26	4.0	9.25	4.0	9.25	3.9	9.20	3.9	9.20	3.75										
25	11.48	-	-	6.0	-	-	-	11.42	6.0	11.28	6.0	11.26	6.0	11.24	6.0	11.22	6.0	11.20	5.75	11.03	5.7	10.94	5.5	10.71	5.2								
29	11.46	-	-	6.0	-	-	-	11.36	6.0	11.26	6.0	11.24	6.0	11.22	6.0	11.20	5.75	11.01	5.75	10.97	5.6	10.93	5.6	10.76	5.5								
30	11.67	-	-	6.0	-	-	-	11.56	6.0	11.46	6.0	11.46	6.0	11.37	5.75	11.28	5.75	11.23	5.75	11.19	5.6	11.16	5.6	10.90	5.25								
SPRING NUMBER		12,000 CYCLES			14,000 CYCLES			16,000 CYCLES			#20 Rds.																						
4		H _F	P _I																														
5	10.95	5.25	9.6	3.75	9.18	3.25	9.08	2.9	9.26	3.1																							
6	10.78	5.2	9.62	4.25	9.84	3.8																											
10	9.09	3.75	8.67	3.25	8.40	2.9	8.27	2.3	9.19	2.2																							
16	9.81	4.5	9.62	4.2	9.84	4.1																											
17	9.42	3.8	10.41	4.75	10.01	4.1																											

REMARKS: 1. H_F = inches; P_I = pounds

2. All processing done at Springfield Armory except for Spring #28, #29, #30 cold set by manufacturer.

3. Gymnasticating test - all springs were gymnasticated on a vertical shaper at 116 strokes/min.

4. #20 rounds - weapon firing prior to Gymnasticating Test.

5. "A" - load and free height check after springs were stress-relieved only, Spring #4, #5, #6.

"B" - free height check after "A" was done.

"C" - load and free height check.

a. Spring #10, #11, #12 (stress-relieved and cold-set).

b. Spring #16, #17, #18 (stress-relieved and heat-set).

c. Spring #22, #23, #24 (heat-set only)

6. Loads taken at compressed length of 5-1/2 inches.

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
WEAPON FIRING TEST

卷之三

- RECS:**

 1. H_F = inches; P , = pounds
 2. All processing done at the Springfield Armory.
 3. Loads taken at compressed length of 5-1/2 inches.
 4. Actual weapon firing test
 5. "A" - Load and free check after springs were stress-relieved "only", Springs #1, #2, #3.
"B" - Free length after "A" was done.
"C" - Free length and load check taken after:
 - a. Stress-relieving and cold-setting for Springs #7, #8, #9.
 - b. Stress-relieving and heat-set for Springs #13, #14, #15.
 - c. Heat-set "only" for Springs #19, #20, #21.
 - d. Cold-set by manufacturer for Springs #25, #26, #27.

SUBJECT SPRINGS - LIMITED STORAGE TEST

SPRING NO.	CIRCUITRY	MAGAZINE	2 MONTHS			15 WEEKS			50 LOADINGS			17 WEEKS			41 WEEKS			AFTER 6 LOADINGS			1 1/2 YEARS			TOTAL LOSS			% SEE REPAIRS	
			H _F	P ₁	CONDITION	H _F	P ₁	CONDITION	H _F	P ₁	CONDITION	H _F	P ₁	* TEST BRANCH CORRECTS														
31	11.32	6.0	"	"	UNLOADED	11.70	5.75	"	"	"	"	11.47	6.2	11.43	6.1	11.43	6.1	10.92	5.75	.69	.5	1.65	1.65	1.65	1.65	1.65	1.65	
32	11.24	6.0	"	"	UNLOADED	11.15	5.75	"	"	"	"	10.40	4.75	10.40	4.6	10.36	4.6	10.26	4.6	1.44	1.44	1.32	1.32	1.32	1.32	1.32	1.32	
33	11.73	6.25	"	"	UNLOADED	11.61	6.25	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
34	11.61	6.25	"	"	LOANED	11.49	6.25	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
35	11.68	6.25	"	"	LOANED	10.50	4.8	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
36	11.52	6.2	"	"	LOANED	10.50	4.9	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
37	11.84	6.75	"	"	LOANED	10.6	5.1	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
38	11.79	6.5	"	"	LOANED	10.63	5.0	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
39	11.80	6.5	"	"	UNLOADED	10.66	5.0	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
40	11.71	6.5	"	"	UNLOADED	11.57	6.25	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
41	11.71	6.5	"	"	UNLOADED	11.59	6.25	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
42	11.42	6.0	"	"	UNLOADED	11.27	5.9	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
43	11.76	6.5	"	"	UNLOADED	11.61	6.25	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
44	11.26	5.75	"	"	LOANED	10.35	4.7	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
45	11.49	6.25	"	"	LOANED	10.41	4.75	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
46	11.57	6.5	"	"	LOANED	10.47	5.3	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
47	11.70	6.25	"	"	LOANED	10.59	5.1	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
48	11.60	6.25	"	"	LOANED	10.59	5.1	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
49	11.60	6.25	"	"	LOANED	10.59	5.1	"	"	"	"	10.39	4.75	10.36	4.6	10.30	4.5	10.20	4.5	1.32	1.32	1.32	1.32	1.32	1.32	1.32	1.32	
50	11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
51	10.80	0	.25	.6	1.0	1.6	2.1	2.6	3.25	4.0	4.5	5.0	5.3	5.9	6.5	7.0	7.5	8.0	8.6	9.1	9.5	10.5	10.73	10.73	10.73	10.73	10.73	
52	10.76	0	.25	.6	1.0	1.6	2.1	2.6	3.25	4.0	4.5	5.0	5.3	5.9	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.5	10.77	10.77	10.77	10.77	10.77	
53	10.50	0	0	0	1.0	1.4	2.0	2.5	3.0	3.75	4.25	4.8	5.25	5.8	6.3	6.7	7.0	7.5	8.0	8.5	9.0	9.4	10.4	10.48	10.48	10.48	10.48	10.48
54	10.86	0	.25	.6	1.0	1.6	2.1	2.6	3.25	4.0	4.5	5.0	5.3	5.9	6.6	7.1	7.6	8.1	8.6	9.1	9.5	10.5	10.75	10.75	10.75	10.75	10.75	
55	10.24	0	0	.3	.75	1.25	1.6	2.1	2.6	3.25	3.75	4.3	4.8	5.3	5.8	6.4	7.0	7.5	8.0	8.5	9.0	9.5	10.5	10.20	10.20	10.20	10.20	10.20
56	10.20	0	0	.25	.75	1.25	1.6	2.1	2.6	3.25	3.75	4.3	4.8	5.3	5.8	6.4	7.0	7.5	8.0	8.5	9.0	9.5	10.5	10.18	10.18	10.18	10.18	10.18
57	10.16	0	0	.25	.75	1.25	1.6	2.1	2.6	3.25	3.75	4.3	4.8	5.3	5.8	6.4	7.0	7.5	8.0	8.4	9.0	9.5	10.5	10.14	10.14	10.14	10.14	10.14
58	10.30	0	0	.25	.75	1.25	1.6	2.1	2.6	3.25	3.75	4.3	4.8	5.3	5.8	6.4	7.0	7.5	8.0	8.4	9.0	9.5	10.5	10.30	10.30	10.30	10.30	10.30
59	10.92	0	.5	.75	1.25	1.8	2.25	2.8	3.4	4.1	4.6	5.1	5.75	6.25	6.75	7.25	7.75	8.25	8.75	9.25	9.75	10.25	10.78	10.78	10.78	10.78	10.78	

REMARKS:

- Limited and long storage test.
- Stress-relieved and cold-set by manufacturer.
- Incremental load check after six (6) loading test only.
- Storage at basic compressed height of 5-1/2 inches.
- Report from Test Branch after weapon firing of long term storage springs.

APPENDIX A

REPORT
SA-TRII-2643RIFLE, 7.62mm, M14, SPRING, MAGAZINE, C7267078
STORAGE TEST - ORIGINAL

SPRING	FREE LENGTH	LOAD (LBS) AT COMPRESSED HEIGHT OF (--) INCHES										F.P.S.
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	
1	14.43	3.5	4.0	4.6	5.2	5.8	6.4	6.8	7.2	7.6	8.2	8.5
2	16.50	3.5	4.0	4.5	5.1	5.7	6.3	6.9	7.5	8.1	8.7	9.1
3	14.41	3.4	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.0	8.5	8.9
4	16.46	3.4	4.0	4.5	5.1	5.7	6.3	6.9	7.5	8.1	8.7	9.1
5	14.41	3.4	4.0	4.4	5.1	5.7	6.3	6.9	7.5	8.1	8.5	8.9
6	16.41	3.5	3.8	4.4	5.1	5.7	6.3	6.9	7.5	8.1	8.7	9.1
7	16.26	3.3	3.75	4.4	5.2	5.75	6.4	6.9	7.5	8.0	8.5	8.9
8	16.43	3.6	4.0	4.6	5.2	5.8	6.0	6.6	7.25	7.6	8.25	8.5
9	16.48	3.5	4.0	4.6	5.2	5.8	6.3	6.9	7.25	7.6	8.25	8.5
10	16.43	3.5	4.0	4.7	5.25	5.9	6.3	6.9	7.25	7.6	8.2	8.5
11	16.43	3.25	4.0	4.6	5.1	5.75	6.4	6.9	7.25	7.6	8.2	8.5
12	16.13	3.25	3.8	4.4	5.0	5.5	6.0	6.5	7.0	7.2	8.0	8.5
13	16.41	3.5	4.25	4.75	5.4	6.0	6.5	7.0	7.5	8.1	8.75	9.25
14	16.43	3.5	4.0	4.75	5.3	5.9	6.0	6.6	7.1	7.6	8.25	8.75
15	16.27	3.5	4.0	4.75	5.3	5.9	6.1	6.7	7.4	8.1	8.4	8.7
16	16.47	3.5	4.0	4.75	5.4	5.75	6.1	6.8	7.4	8.1	8.75	9.1
17	16.36	3.5	4.0	4.5	5.25	5.8	6.4	6.9	7.5	8.1	8.75	9.1
18	16.35	3.4	4.0	4.6	5.25	5.8	6.4	6.9	7.5	8.1	8.75	9.1
19	16.53	3.5	4.0	4.6	5.25	5.8	6.4	6.9	7.4	8.1	8.75	9.1
20	16.46	3.6	4.25	4.8	5.25	5.8	6.0	6.5	7.2	7.75	8.3	8.8
21	16.43	3.5	4.0	4.5	5.25	5.8	6.3	6.9	7.5	8.1	8.75	9.1
22	16.41	3.75	4.0	4.6	5.25	5.9	6.4	7.0	7.5	8.0	8.5	8.75
23	16.27	3.25	3.8	4.5	5.25	5.8	6.4	6.9	7.5	8.1	8.75	9.1
24	16.36	3.25	4.0	4.5	5.25	5.8	6.4	6.9	7.5	8.1	8.75	9.1
25	16.43	3.5	4.0	4.5	5.1	5.7	6.3	6.9	7.5	8.0	8.5	8.9
26	16.33	3.5	4.0	4.6	5.0	5.6	6.0	6.5	7.0	7.5	8.1	8.6
27	16.49	3.6	4.25	4.8	5.25	5.8	6.0	6.5	7.1	7.6	8.15	8.75
28	16.37	3.5	4.0	4.6	5.25	5.9	6.4	7.0	7.5	8.1	8.6	9.05
29	16.52	3.5	4.25	4.8	5.25	5.8	6.0	6.5	7.1	7.6	8.25	8.75
30	16.47	3.6	4.25	5.0	5.25	6.0	6.5	7.0	7.5	8.1	8.25	8.75
31	16.39	3.5	4.1	4.9	5.25	6.0	6.5	7.0	7.5	8.0	8.5	8.75
32	16.41	3.5	4.0	4.9	5.1	6.0	6.4	7.0	7.5	8.1	8.5	9.0
33	16.33	3.5	4.0	4.6	5.25	5.9	6.3	6.9	7.5	8.1	8.6	9.0
34	16.43	3.5	4.1	4.6	5.25	5.9	6.3	6.9	7.5	8.1	8.6	9.0
35	16.53	3.6	4.25	4.9	5.25	6.0	6.5	7.1	7.7	8.25	8.75	9.25
36	16.47	3.6	4.25	5.0	5.25	6.0	6.5	7.0	7.5	8.1	8.6	9.0
37	16.44	3.6	4.4	4.9	5.5	5.9	6.5	7.25	7.7	8.25	8.75	9.25
38	16.44	3.5	4.1	4.75	5.25	6.0	6.5	7.1	7.6	8.25	8.75	9.25
39	16.49	3.5	4.25	4.8	5.6	6.0	6.5	7.1	7.6	8.25	8.75	9.25
40	16.41	3.5	4.0	4.75	5.25	6.0	6.5	7.0	7.5	8.0	8.6	9.0

REMARKS:

1. Subject Spring Lot #2 (untreated)
2. Basic check after being stress-relieved for 30 minutes at 400°F. Phase 1 for all 100 springs.
3. All springs in free condition.
4. Springs 1-10 (only) Given original load to 1.0 inches. All others to 5.5 inches.
5. Type of processing on springs after basic check.
 - a. 1-30 stress relieve "only"
 - b. 31-60 stress-relieve and heat-set - compress to 5 inches, heat at 400°F for one hour.
 - c. 61-70 stress-relieve and cold-set - compress to 11/16 inches three times.
 - d. 71-86 - used in temperature storage test.
 - e. 87-100 - no further test.
 - f. All processing was done at Springfield Armory.
 - g. Basic inspection load after cold-setting. 5.5 lbs + 3/4 lbs.
7. *Basic inspection load after cold-setting.

-28-

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - ORIGINAL

APPENDIX A

		LOAD (LBS) AT COMPRESSED HEIGHT OF ... INCHES																				
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0
41	14.50	3.6	4.3	4.75	5.1	5.75	6.3	6.8	7.3	7.8	8.3	8.75	9.25	9.75								14.26
42	14.43	3.6	4.3	4.6	5.3	5.9	6.4	6.9	7.5	8.2	8.75	9.0	9.6									14.21
43	14.33	3.6	4.3	4.5	5.2	5.75	6.3	6.8	7.3	7.9	8.25	8.5	9.0	9.5								14.03
44	14.41	3.5	4.0	4.75	5.1	5.75	6.3	6.8	7.3	7.9	8.25	8.5	8.9	9.4								14.11
45	14.29	3.4	3.75	4.5	5.2	5.75	6.25	6.75	7.3	7.9	8.0	8.4	8.9									14.07
46	14.31	3.4	4.0	4.7	5.1	5.75	6.4	6.9	7.4	8.0	8.3	8.6	9.0									14.03
47	14.43	3.5	4.1	4.5	5.3	5.75	6.4	6.9	7.4	8.0	8.3	8.6	9.0									14.10
48	14.40	3.5	4.1	4.5	5.3	5.75	6.4	6.9	7.4	8.0	8.3	8.6	9.0									14.15
49	14.35	3.4	4.0	4.4	5.2	5.75	6.25	6.8	7.3	7.9	8.1	8.4	8.6	9.1								14.03
50	14.33	3.6	3.9	4.6	5.6	6.25	6.9	6.6	7.6	8.2	8.6	8.9	9.1									14.11
51	14.58	3.6	4.25	4.9	5.4	6.0	6.5	7.2	7.6	8.25	8.6	8.8	9.2									14.24
52	14.51	3.5	4.2	4.75	5.1	5.6	6.0	6.5	7.2	7.8	8.1	8.7	9.1									14.19
53	14.43	3.5	4.1	4.75	5.1	5.5	5.9	6.3	7.1	7.7	8.1	8.6	9.1									14.15
54	14.43	3.5	4.2	4.6	5.4	5.9	6.3	6.8	7.5	8.1	8.5	8.9	9.4									14.13
55	14.45	3.5	4.1	4.75	5.1	5.6	6.0	6.5	7.0	7.6	8.1	8.5	9.0									14.15
56	14.46	3.6	4.25	4.875	5.25	5.8	6.3	6.8	7.25	7.8	8.25	8.75	9.25									14.17
57	14.43	3.75	4.25	4.75	5.1	5.5	6.0	6.5	7.0	7.5	8.0	8.75	9.25									14.15
58	14.53	3.5	4.0	4.75	5.25	5.6	6.0	6.5	7.25	7.8	8.25	8.75	9.25									14.31
59	14.40	3.5	4.25	4.875	5.1	5.6	6.0	6.5	7.0	7.5	8.25	8.75	9.25									14.17
60	14.46	3.5	4.0	4.75	5.1	5.25	5.875	6.3	7.25	7.8	8.25	8.75	9.25									14.25
61	14.46	3.6	4.2	4.75	5.1	5.5	6.0	6.5	7.1	7.7	8.4	8.9	9.4									14.09
62	14.43	3.7	4.2	4.9	5.6	6.0	6.5	7.0	7.5	8.1	8.75	9.25	9.7									14.19
63	14.51	3.6	4.2	4.8	5.3	5.8	6.0	6.5	7.2	7.6	8.25	8.6	9.1									14.25
64	14.52	3.6	4.25	4.8	5.4	5.8	6.0	6.5	7.2	7.7	8.25	8.6	9.1									14.19
65	14.25	3.6	4.0	4.6	5.25	5.75	6.25	6.75	7.0	7.5	8.1	8.75	9.25									14.19
66	14.23	3.4	4.1	4.6	5.3	5.9	6.4	6.9	7.1	7.5	8.0	8.4	8.9									14.02
67	14.32	3.3	3.9	4.6	5.1	5.6	6.1	6.6	6.8	7.3	7.8	8.3	8.8									14.17
68	14.46	3.5	4.25	4.8	5.3	5.8	6.0	6.5	7.2	7.7	8.25	8.75	9.25									14.23
69	14.44	3.7	4.25	4.8	5.3	5.8	6.0	6.5	7.1	7.6	8.2	8.6	9.1									14.23
70	14.29	3.5	4.25	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0									14.24
71	14.44	3.4	3.9	4.75	5.1	5.6	6.0	6.5	7.1	7.6	8.2	8.6	9.1									14.17
72	14.53	3.6	4.0	4.75	5.1	5.6	6.0	6.5	7.1	7.7	8.4	8.75	9.25									14.27
73	14.51	3.6	4.25	4.9	5.4	5.9	6.3	6.8	7.25	7.8	8.4	8.75	9.25									14.24
74	14.43	3.6	4.25	4.8	5.1	5.6	6.0	6.5	7.1	7.6	8.2	8.6	9.1									14.17
75	14.50	3.6	4.2	4.6	4.9	5.4	5.6	6.25	6.6	7.1	7.9	8.25	8.6									14.19
76	14.45	3.6	4.4	4.4	4.9	5.1	5.4	5.7	6.1	6.6	7.2	7.8	8.4									14.15
77	14.52	3.6	4.2	4.9	5.4	5.9	6.3	6.8	7.3	7.9	8.4	8.9	9.3									14.27
78	14.46	3.4	4.1	4.6	4.9	5.4	5.7	6.1	6.6	7.0	7.6	8.2	8.6									14.24
79	14.41	3.5	4.1	4.4	4.6	5.1	5.4	5.7	6.1	6.6	7.0	7.4	8.2									14.17
80	14.39	3.5	4.0	4.6	5.4	5.7	6.4	6.8	7.1	7.6	8.1	8.7	9.1									14.

REMARKS : None

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - ORIGINAL

SPRING NO.	TEST NO.	LOAD (LBS.) AT COMPRESSED LENGTH OF -- INCHES	PRE-TEST LENGTH																				
			11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0
81	14.55	3.75	4.2	4.9	5.5	6.1	6.6	7.1	7.6	8.1	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.21
32	14.53	3.75	4.3	4.9	5.6	6.1	6.6	7.2	7.75	8.4	8.8	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.28
83	14.45	3.6	4.2	4.75	5.4	6.0	6.4	7.0	7.7	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.07
84	14.43	3.6	4.2	4.7	5.3	5.9	6.4	7.0	7.75	8.2	8.8	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.17
85	14.45	3.6	4.2	4.75	5.4	6.1	6.6	7.1	7.7	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.12
96	14.51	3.7	4.1	5.0	5.9	6.0	6.5	7.2	7.75	8.1	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.25
87	14.45	3.5	4.0	4.8	5.5	6.0	6.5	7.2	7.75	8.1	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.16
88	14.48	3.6	4.1	5.0	5.4	6.1	6.6	7.1	7.75	8.4	8.9	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.19
89	14.46	3.6	4.25	4.9	5.5	6.1	6.6	7.1	7.75	8.3	8.9	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.11
90	14.50	3.6	4.2	4.9	5.4	5.9	6.4	7.2	7.75	8.25	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.17
91	14.45	3.5	4.0	4.7	5.25	5.9	6.4	7.1	7.7	8.25	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.17
92	14.46	3.6	4.25	4.6	5.25	5.75	6.4	7.0	7.6	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.09
93	14.52	3.75	4.4	4.75	5.3	6.0	6.6	7.0	7.6	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.15
94	14.44	3.6	4.2	4.9	5.6	5.9	6.5	7.1	7.6	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.14
95	14.49	3.4	4.1	4.9	5.3	6.0	6.5	7.2	7.7	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.17
96	14.47	3.6	4.1	4.75	5.4	6.1	6.5	7.0	7.75	8.2	8.75	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.21
97	14.45	3.6	4.4	4.8	5.6	6.0	6.6	7.2	7.9	8.25	8.7	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.19
98	14.46	3.6	4.3	4.7	5.6	6.25	6.5	7.0	7.75	8.4	8.9	9.25	9.5	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	14.11
99	14.27	3.4	4.2	4.9	5.0	6.4	6.4	6.9	7.3	8.2	8.6	9.3	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	13.95
100	14.55	3.6	4.1	4.7	5.4	6.1	6.4	6.6	7.2	7.9	8.3	8.9	9.3	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	9.7	14.25

REMARKS : None

APPENDIX A

REPORT
SA-TR11-2663RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - see Remarks

SPRING NO.	LOAD (LBS) AT COMPRESSED HEIGHT OF -- INCHES										ELEVATION									
	11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5
1 11.81	.75	1.1	1.6	2.2	2.7	3.25	3.75	4.3	5.0	5.6	6.1	6.7	7.1	7.8	8.4	9.2	9.6	10.8	12.8	11.74
2 12.00	.75	1.25	1.75	2.4	3.0	3.5	3.9	4.6	5.2	5.75	6.4	6.8	7.5	8.1	8.75	9.5	10.0	10.1	10.9	11.4
3 11.97	.9	1.4	2.0	2.5	3.0	3.5	4.0	4.5	5.25	5.9	6.4	6.9	7.5	8.1	8.7	9.2	10.1	10.25	11.6	11.69
4 11.81	.8	1.2	1.6	2.25	2.75	3.25	3.75	4.4	5.0	5.5	5.8	6.6	7.2	7.5	8.3	8.9	9.5	9.8	10.25	11.0
5 11.65	.75	1.1	1.6	2.4	3.0	3.6	4.25	4.75	5.25	5.75	6.25	6.75	7.35	8.0	8.25	8.9	9.75	10.75	11.0	11.57
6 11.99	1.0	1.4	1.85	2.35	2.75	3.0	3.5	4.0	4.75	5.25	5.75	6.25	6.75	7.25	8.50	9.0	9.75	10.5	10.75	11.0
7 11.59	.75	1.25	1.75	2.25	3.0	3.5	4.0	4.75	5.25	5.75	6.25	6.75	7.35	8.0	8.75	9.25	9.8	10.5	10.75	11.25
8 11.83	.75	1.25	1.75	2.35	2.75	3.0	3.5	4.0	4.6	5.1	5.75	6.25	6.6	7.25	8.0	8.6	9.3	9.75	10.25	11.25
9 11.97	.8	1.25	1.75	2.35	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.3	8.8	9.5	10.5	11.77
10 11.97	.9	1.1	1.6	2.00	2.75	3.25	3.75	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.3	8.8	9.5	10.5	11.69
11 14.11	3.5	4.0	4.6	4.95	5.75	6.2	6.75	7.0	8.0	8.5	9.25	9.7	10.1	10.5	10.75	11.25	12.25	12.50	12.0	12.07
12 13.32	3.1	3.7	4.25	4.8	5.3	6.0	6.1	6.2	7.0	7.6	8.3	9.0	9.3	10.0	10.25	10.6	10.75	11.75	12.3	11.96
13 14.11	3.1	3.75	4.25	4.8	5.3	6.1	6.6	7.1	7.8	8.5	9.25	9.5	10.2	10.25	10.75	11.50	12.00	12.10	12.00	12.75
14 14.19	3.25	3.75	4.3	4.75	5.3	6.0	6.6	7.25	7.75	8.5	9.1	9.6	10.25	10.75	11.00	11.50	12.00	12.10	12.10	12.03
15 13.39	3.0	3.75	4.25	4.8	5.3	6.0	6.6	7.25	7.75	8.25	8.8	9.3	9.8	10.25	10.75	11.00	11.6	12.00	12.25	12.75
16 14.22	3.25	3.75	4.3	4.8	5.6	6.1	6.75	7.25	7.75	8.3	9.1	9.75	10.25	10.6	11.00	11.00	11.25	12.00	12.25	13.00
17 13.99	3.25	3.6	4.25	4.75	5.3	6.0	6.5	7.0	7.75	8.3	9.1	9.5	10.0	10.25	10.8	11.00	11.5	12.1	12.25	12.1
18 14.04	3.1	3.6	4.25	4.75	5.3	6.0	6.5	7.0	7.75	8.25	9.0	9.5	9.75	10.3	10.75	11.00	11.5	12.00	12.25	12.1
19 14.09	3.0	3.5	4.25	4.75	5.25	6.0	6.5	7.0	7.75	8.25	9.0	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.13	
20 14.11	3.25	3.75	4.25	4.8	5.3	6.0	6.75	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.03	
21 14.21	3.1	3.7	4.25	4.75	5.3	6.1	6.75	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.03	
22 14.12	3.1	3.7	4.25	4.75	5.3	6.1	6.75	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
23 14.01	3.0	3.6	4.25	4.75	5.3	6.1	6.6	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
24 14.11	3.1	3.75	4.3	4.8	5.3	6.1	6.7	7.25	7.75	8.25	9.0	9.5	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
25 14.01	3.1	3.6	4.25	4.75	5.3	6.1	6.75	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
26 14.17	3.1	3.75	4.25	4.8	5.3	6.1	6.7	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
27 14.09	3.2	3.7	4.25	4.75	5.3	6.0	6.75	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
28 14.07	3.1	3.6	4.25	4.75	5.3	6.0	6.7	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
29 14.21	3.25	3.7	4.25	4.75	5.3	6.1	6.7	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	
30 14.14	3.25	3.7	4.25	4.75	5.3	6.0	6.75	7.25	7.75	8.25	9.1	9.6	10.0	10.3	10.8	11.25	11.5	12.0	12.07	

- REMARKS: 1. Above springs were stress relieved for 30 minutes at 400°F only.
 2. Above load readings were taken before assembly into magazine.
 3. a. Springs 1 thru 10 were stored free.
 b. Springs 11 thru 20 were stored in loaded magazine (20 rounds).
 c. Springs 21 thru 30 were stored in empty magazine.

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - see Remarks

SPRING NO.	LENGTH	LOAD (LBS) AT COMPRESSED HEIGHT OF -- INCHES																						
		10.0	10.5	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0			
31	12.05	.9	1.6	2.2	2.6	3.1	3.7	4.4	5.0	5.3	6.2	6.7	7.3	7.9	8.3	9.1	9.8	10.0	10.3	10.7	11.0	12.2	11.63	
32	12.29	.8	1.4	2.0	2.5	3.1	3.6	4.2	4.7	5.2	5.9	6.5	7.1	7.7	8.3	8.9	9.2	9.9	10.2	10.7	11.0	12.2	11.55	
33	12.09	1.1	1.6	2.2	2.7	3.4	3.9	4.2	4.7	5.0	5.6	6.0	6.6	7.2	7.8	8.3	9.1	9.6	10.2	10.6	11.0	12.0	11.63	
34	12.15	.9	1.4	2.0	2.5	3.0	3.7	4.2	4.7	5.4	5.7	6.5	7.1	7.7	8.3	8.9	9.3	9.9	10.5	10.6	11.1	12.0	11.55	
35	12.25	1.1	1.5	2.1	2.7	3.3	3.7	4.4	4.9	5.6	6.0	6.6	7.4	7.7	8.5	9.0	9.6	10.2	10.6	10.9	11.2	12.1	11.67	
36	12.17	1.0	1.6	2.0	2.7	3.2	3.7	4.2	4.9	5.5	6.0	6.6	7.2	7.7	8.4	9.4	9.5	10.2	10.8	11.1	11.4	12.2	11.65	
37	12.22	.9	1.5	2.1	2.6	3.1	3.7	4.4	4.9	5.5	6.1	6.6	7.2	7.9	8.5	9.0	9.6	10.2	10.7	11.1	12.0	11.65		
38	12.13	1.0	1.5	2.1	2.7	3.2	3.6	4.2	4.9	5.6	6.1	6.6	7.2	7.9	8.5	9.1	9.5	10.2	10.7	11.1	12.2	11.65		
39	12.19	.9	1.4	2.0	2.6	3.1	3.7	4.2	4.8	5.3	6.0	6.6	7.2	7.7	8.5	9.1	9.6	10.1	10.6	11.1	12.0	11.62		
40	11.67	.75	1.2	1.75	2.3	2.9	3.5	4.0	4.6	5.1	5.7	6.3	6.8	7.4	8.1	8.7	9.3	9.6	10.2	10.7	11.0	12.0	11.57	
41	12.00	.75	1.2	1.7	2.25	2.8	3.4	4.1	4.6	5.1	5.7	6.4	6.9	7.6	8.1	8.8	9.4	10.1	10.7	11.0	11.5	12.2	11.57	
42	12.14	.9	1.4	1.9	2.4	3.1	3.75	4.1	4.8	5.3	6.0	6.6	7.25	7.9	8.5	9.0	9.7	10.25	10.5	10.8	11.25	12.5	11.60	
43	12.14	.9	1.4	1.9	2.6	3.1	3.6	4.1	4.75	5.4	6.0	6.6	7.3	7.9	8.5	9.2	9.7	10.1	10.5	10.75	11.2	12.75	11.63	
44	12.17	1.0	1.5	2.2	2.8	3.25	3.75	4.3	4.9	5.4	6.0	6.6	7.2	7.8	8.5	9.0	9.6	10.1	10.25	10.8	11.1	12.7	11.65	
45	12.20	.9	1.3	2.1	2.5	3.0	3.5	3.8	4.3	4.9	5.6	6.2	6.6	7.3	8.1	8.6	9.1	9.75	10.1	10.7	11.2	12.1	11.63	
46	11.37	.8	1.4	1.9	2.4	3.1	3.6	4.1	4.7	5.3	5.8	6.3	6.9	7.6	8.2	8.75	9.3	10.0	10.5	10.75	11.2	12.3	11.50	
47	12.10	.9	1.4	1.9	2.4	3.1	3.6	4.1	4.7	5.3	5.8	6.4	7.1	7.6	8.3	9.1	9.75	10.2	10.6	11.0	11.5	12.25	11.59	
48	12.12	1.1	1.7	2.25	2.8	3.3	3.7	4.3	4.9	5.5	6.1	6.75	7.1	8.0	8.6	9.1	9.75	10.0	10.5	11.0	11.4	12.4	11.64	
49	12.13	1.0	1.5	2.0	2.6	3.1	3.6	4.1	4.7	5.3	5.9	6.1	6.6	7.1	7.9	8.4	9.2	9.5	10.2	10.5	10.9	11.3	11.54	
50	12.09	.9	1.4	2.0	2.5	3.1	3.7	4.25	4.75	5.4	5.9	6.6	7.25	7.7	8.4	9.0	9.6	10.0	10.5	10.9	11.25	11.43		
51	12.22	1.2	1.7	2.1	2.6	3.1	3.6	4.1	4.7	5.3	5.8	6.4	7.0	7.6	8.2	8.8	9.4	10.1	10.7	11.2	12.2	11.63		
52	11.93	.8	1.3	1.8	2.4	3.0	3.5	4.1	4.7	5.3	5.9	6.5	7.1	7.6	8.3	9.1	9.75	10.2	10.6	11.0	11.5	12.25	11.59	
53	12.26	1.0	1.5	2.1	2.6	3.2	3.7	4.2	4.75	5.4	5.9	6.5	7.1	7.7	8.4	9.0	9.6	10.2	10.5	10.9	11.3	11.54		
54	12.13	1.0	1.5	2.25	2.75	3.25	3.75	4.2	4.7	5.3	5.9	6.5	7.1	7.7	8.4	9.0	9.6	10.0	10.5	10.9	11.3	11.54		
55	12.17	1.0	1.5	2.25	2.7	3.2	3.7	4.2	4.75	5.4	5.9	6.5	7.1	7.7	8.4	9.0	9.6	10.0	10.5	10.9	11.3	11.54		
56	12.05	1.0	1.6	1.9	2.5	3.1	3.6	4.2	4.7	5.3	5.9	6.5	7.1	7.7	8.4	9.0	9.6	10.2	10.7	11.2	12.2	11.63		
57	11.76	.9	1.25	1.8	2.3	2.8	3.4	3.9	4.6	5.2	5.75	6.3	6.8	7.4	8.1	8.8	9.4	9.9	10.5	11.0	11.5	12.25	11.59	
58	12.06	.8	1.4	2.0	2.5	3.1	3.7	4.25	4.6	5.2	5.8	6.4	7.0	7.6	8.3	9.0	9.75	10.2	10.6	11.1	11.6	12.26	11.64	
59	12.11	.9	1.4	2.0	2.6	3.2	3.7	4.25	4.75	5.4	6.0	6.6	7.25	7.8	8.5	9.2	9.9	10.5	11.0	11.4	12.4	11.64		
60	12.21	.9	1.4	1.9	2.6	3.2	3.7	4.25	4.75	5.4	6.0	6.6	7.25	7.8	8.5	9.2	9.9	10.5	11.0	11.4	12.4	11.64		
61	14.04	.4	1.75	1.25	1.75	2.25	2.75	3.2	3.7	4.25	4.75	5.2	5.75	6.1	6.7	7.25	7.8	8.3	8.8	9.3	9.8	10.3	11.5	
62	14.19	.5	1.3	1.8	2.3	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.4	8.9	9.4	9.9	10.4	11.7	11.58	
63	14.25	.5	1.3	1.75	2.3	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.4	8.9	9.4	9.9	10.4	11.8	11.65	
64	14.25	.5	1.9	1.3	1.8	2.3	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.4	8.9	9.4	9.9	10.4	11.8	11.65
65	13.73	.25	1.3	1.8	2.3	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.4	8.9	9.4	9.9	10.4	11.8	11.65	
66	13.73	.25	1.3	1.8	2.3	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	8.4	8.9	9.4	9.9	10.4	11.8	11.65	
67	14.06	.5	1.1	1.6	2.0	2.6	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.1	8.6	9.1	9.6	10.1	11.8	11.65	
68	14.19	.4	1.3	1.4	1.9	2.4	2.9	3.4	3.9	4.4	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4	11.8	11.65
69	14.19	.4	1.3	1.4	1.9	2.4	2.9	3.4	3.9	4.4	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4	11.8	11.65
70	14.12	.4	1.0	1.5	1.9	2.4	2.9	3.4	3.9	4.4	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4	11.8	11.65
71	14.12	.4	1.0	1.5	1.9	2.4	2.9	3.4	3.9	4.4	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	10.4	11.8	11.65

- REMARKS:
1. Springs 31 thru 60 were stress-relieved and heat-set (compress to 5 inches and heat at 400°F for 1 hour).
 2. Springs 61 through 70 were stress-relieved and cold-set (compress to 11/16 inches three times).
 3. Above load readings were taken before assembly into magazine.
 4. a. Springs 31 thru 40 were stored free
 - b. Springs 41 thru 50 were stored in a loaded magazine (20 rounds).
 - c. Springs 51 thru 60 were stored in an empty magazine.
 5. Springs 61 thru 70 were not subjected to this storage program. Springs of this set will be found in the temperature storage program.

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 1 week

SLOT	SPRING	TEST	LOAD (LBS.)	COMPRESSED HEIGHT (INCHES)																						
				10.0	10.5	11.0	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0	
1	11.77	5	1.1	1.5	2.0	2.6	3.1	3.7	4.2	4.7	5.2	5.7	6.2	6.5	6.9	7.0	7.4	6.0	8.4	9.0	9.4	9.9	10.3	12.4	11.72	
2	11.89	7	1.1	1.6	2.2	2.6	3.1	3.8	4.2	4.9	5.0	5.5	6.0	6.5	6.9	7.2	7.7	8.1	8.6	9.1	9.4	10.1	10.4	11.9	11.84	
3	11.87	1	1.1	1.6	2.1	2.7	3.3	3.8	4.4	4.9	5.6	6.1	6.7	7.1	7.7	8.1	8.9	9.1	9.6	9.7	10.2	10.7	12.0	11.77		
4	11.77	1	1.0	1.5	2.1	2.6	3.1	3.6	4.1	4.7	5.2	5.9	6.5	7.0	7.5	8.1	8.6	9.2	9.5	9.7	10.2	12.1	12.1	11.71		
5	11.51	12	1.2	1.7	2.0	2.4	2.9	3.5	3.8	4.1	4.6	5.3	6.0	6.7	7.3	7.9	8.4	9.0	9.4	9.8	10.4	12.0	11.62	11.64		
6	11.51	9	1.3	1.75	2.2	2.8	3.4	3.9	4.4	4.9	5.0	5.4	6.1	6.6	7.2	7.6	8.1	8.75	9.3	9.8	10.2	10.5	12.2	12.2	11.64	
7	11.52	1	1.1	1.6	2.2	2.7	3.3	3.7	4.3	4.9	5.4	6.0	6.6	7.1	7.7	8.1	8.75	9.5	9.4	10.1	10.4	12.5	12.5	11.73		
8	11.75	7	1.0	1.5	2.0	2.4	3.2	3.7	4.2	4.8	5.4	6.0	6.6	7.1	7.6	7.9	8.6	9.2	9.3	10.0	10.3	12.6	12.6	11.73		
9	11.45	7	1.1	1.6	2.1	2.5	3.1	3.7	4.2	4.8	5.4	6.0	6.5	7.0	7.6	8.1	8.6	9.2	9.4	10.0	10.4	12.6	12.6	11.81		
10	11.73	1	1.9	1.4	2.0	2.5	3.0	3.6	4.0	4.6	5.1	5.7	6.2	6.75	7.4	7.8	8.6	9.1	9.8	10.2	12.6	12.6	11.56	11.56		
11	11.51	12	1.9	1.4	2.0	2.5	3.0	3.6	4.0	4.6	5.1	5.7	6.1	6.5	7.1	7.6	8.1	8.6	9.1	9.5	10.5	11.0	11.0	11.00		
12	11.51	1	1.5	2.0	2.5	3.1	3.7	4.2	4.8	5.4	5.9	6.5	7.1	7.6	8.1	8.6	9.1	9.5	10.1	10.5	11.0	11.0	11.00	11.00		
13	11.97	9	1.4	1.8	2.2	2.7	3.2	3.7	4.2	4.8	5.3	5.9	6.4	7.0	7.5	8.1	8.7	9.3	9.8	10.4	10.9	11.4	11.4	11.90		
14	11.97	3	1.3	1.75	2.1	2.6	3.1	3.7	4.2	4.8	5.3	5.9	6.5	7.1	7.6	8.1	8.6	9.1	9.6	10.1	10.4	10.85	10.85	10.85		
15	11.67	1	1.0	1.4	1.7	2.15	2.75	3.4	3.9	4.5	5.0	5.6	6.1	6.6	7.1	7.5	8.0	8.6	9.2	9.6	10.7	10.7	10.7	10.95		
16	11.06	1	1.4	1.8	1.3	1.8	2.3	2.9	3.4	3.9	4.5	5.0	5.6	6.1	6.6	7.1	7.6	8.0	8.4	8.9	9.4	11.0	11.0	11.00		
17	11.38	1	1.5	1.5	1.9	1.2	1.7	2.2	2.8	3.4	3.9	4.4	5.0	5.6	6.1	6.7	7.1	7.5	8.0	8.6	9.0	9.6	10.7	10.7	11.00	
18	11.37	1	1.3	1.75	1.1	1.5	2.1	2.6	3.1	3.7	4.2	4.8	5.3	5.9	6.4	6.9	7.4	7.9	8.25	8.9	9.2	11.2	10.83	10.83		
19	11.35	9	1.4	1.0	1.2	1.7	2.2	2.75	3.2	3.8	4.3	4.8	5.4	5.9	6.4	6.9	7.5	8.0	8.3	8.8	9.2	10.75	10.85	10.85		
20	11.32	3	1.5	1.9	1.2	1.7	2.1	2.6	3.1	3.6	4.0	4.5	5.0	5.5	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.6	10.6	11.00	
21	11.61	24	1.5	1.0	1.2	1.7	2.1	2.6	3.1	3.6	4.0	4.5	5.0	5.5	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.6	10.6	11.33	
22	11.44	21	2.3	2.9	3.4	3.9	4.5	5.1	5.7	6.1	6.7	7.3	7.9	8.3	8.9	9.4	9.9	10.4	10.9	11.4	11.4	11.35	11.35	11.35		
23	11.16	16	2.2	2.6	3.3	3.9	4.4	5.1	5.5	6.1	6.7	7.2	7.8	8.4	8.9	9.4	9.9	10.4	10.9	11.4	11.4	11.35	11.35	11.35		
24	11.30	22	2.2	2.7	3.4	4.0	4.5	5.1	5.7	6.2	6.8	7.3	7.9	8.6	9.1	9.6	10.1	10.6	11.1	11.6	11.6	11.40	11.40	11.35		
25	11.45	22	2.7	3.4	4.0	4.5	5.1	5.7	6.1	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.6	11.6	11.40	11.40	11.35		
26	11.29	2.2	2.9	3.4	4.0	4.5	5.1	5.7	6.3	6.9	7.5	8.1	8.6	9.1	9.6	10.1	10.6	11.1	11.6	11.6	11.40	11.40	11.35			
27	11.41	2.3	3.0	3.5	4.1	4.7	5.3	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	11.5	11.40	11.40	11.35			
28	11.41	2.3	3.0	3.5	4.2	4.8	5.3	5.9	6.5	7.2	7.7	8.1	8.6	9.1	9.6	10.1	10.6	11.1	11.6	11.6	11.40	11.40	11.35			
29	11.47	2.2	2.9	3.6	4.1	4.6	5.3	5.8	6.5	7.0	7.6	8.1	8.6	9.1	9.6	10.1	10.6	11.1	11.6	11.6	11.40	11.40	11.35			
30	11.22	2.2	2.7	3.4	4.0	4.6	5.1	5.7	6.2	6.8	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	11.5	11.40	11.40	11.35			

- REMARKS : 1. Stress relieved only.
 2. a. Springs 1 - 10 Prec
 b. Springs 11 - 20 Loaded magazine
 c. Springs 21 - 30 Empty magazine

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 1 week

SPRING NO.	FREE LENGTH	LOAD (LBS) AT COMPRESSED HEIGHT OF -- INCHES									
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5
31	11.68	.6	1.6	1.7	2.2	2.7	3.4	4.0	4.5	4.9	5.6
32	11.53	.6	1.1	1.6	2.1	2.6	3.2	3.8	4.3	4.9	5.5
33	11.69	.6	1.0	1.5	2.0	2.6	3.2	3.7	4.3	4.8	5.4
34	11.59	.6	1.0	1.5	2.0	2.6	3.2	3.6	4.2	4.8	5.4
35	11.71	.6	1.0	1.6	2.0	2.6	3.2	3.7	4.3	4.9	5.3
36	11.59	.6	1.1	1.6	2.0	2.6	3.2	3.7	4.4	4.9	5.4
37	11.71	.6	1.2	1.6	2.2	2.7	3.4	3.8	4.4	4.9	5.4
38	11.63	.6	1.2	1.6	2.1	2.6	3.3	3.8	4.3	4.9	5.3
39	11.68	.6	1.2	1.6	2.1	2.6	3.3	3.8	4.4	4.9	5.4
40	11.64	.6	1.1	1.6	2.1	2.6	3.2	3.3	3.9	4.4	4.9
41	11.15	.00	.5	1.0	1.4	1.9	2.6	3.1	3.6	4.3	4.8
42	11.21	.00	.6	1.9	1.5	2.0	2.6	3.2	3.7	4.4	5.1
43	11.59	.4	.9	1.4	1.9	2.5	3.0	3.6	4.1	4.6	5.1
44	11.22	.4	.8	1.2	1.8	2.4	3.1	3.6	4.4	4.6	4.9
45	11.13	.00	.6	1.0	1.6	2.0	2.5	3.1	3.7	4.1	4.7
46	11.10	.00	.6	1.0	1.6	2.1	2.6	3.1	3.6	4.3	4.7
47	11.17	.6	1.1	1.6	2.1	2.6	3.1	3.7	4.4	4.7	5.4
48	11.16	.00	.4	.9	1.3	1.9	2.4	3.0	3.5	4.1	4.6
49	11.03	.00	.4	.9	1.2	1.9	2.5	3.0	3.6	4.1	4.6
50	11.10	.00	.4	.9	1.4	1.9	2.5	3.1	3.6	4.1	4.6
51	12.17	1.3	1.6	2.2	2.6	3.4	3.9	4.4	4.9	5.3	6.1
52	11.85	1.0	1.4	1.7	2.5	3.0	3.5	4.1	4.6	5.3	5.9
53	12.21	1.1	1.6	2.1	2.6	3.4	3.7	4.3	4.9	5.5	6.7
54	12.08	1.0	1.5	2.1	2.6	3.4	3.7	4.3	4.9	5.4	6.6
55	12.13	1.0	1.6	2.1	2.6	3.4	3.7	4.4	4.9	5.5	6.1
56	12.03	1.1	1.4	2.0	2.5	3.0	3.6	4.3	4.9	5.3	6.0
57	11.77	.8	1.4	1.9	2.3	2.9	3.4	4.0	4.6	5.1	5.8
58	12.06	.9	1.4	2.1	2.6	3.1	3.7	4.4	4.7	5.4	6.0
59	12.09	.9	1.5	2.1	2.6	3.1	3.7	4.4	4.9	5.6	6.1
60	12.20	.9	1.5	2.1	2.6	3.3	3.8	4.4	4.9	5.4	6.6

REMARKS: 1. Stress-relieved and heat-set.

2. a. Springs 31 thru 40 - Free

b. Springs 41 thru 40 - Loaded magazine

c. Springs 51 thru 60 - Empty magazine

SA-TRILL-2643
RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
 STORAGE TEST - 2 weeks

TEST NO.	TEST NO.	TEST NO.	TEST NO.	LOAD (LBS) AT COMPRESSED HEIGHT OF -- INCHES												TEST NO.						
				11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	
11	11.0	.1	.75	1.5	2.0	2.25	2.5	2.75	3.0	3.2	3.5	4.0	4.5	4.6	5.2	5.6	6.25	7.0	7.25	7.6	8.25	
12	11.02	.1	.6	1.0	1.3	1.75	2.1	2.5	3.0	3.5	4.0	4.5	5.0	5.4	6.1	6.6	7.0	7.3	7.6	8.0	8.8	
13	10.76	.00	.7	1.0	1.1	1.8	2.5	3.0	3.6	4.0	4.6	5.0	5.1	6.25	6.75	7.1	7.6	8.0	8.5	8.8	9.3	
14	10.85	.00	.7	1.2	1.5	2.0	2.5	3.0	3.6	4.0	4.6	5.1	5.5	6.1	6.6	7.1	7.5	8.0	8.4	8.8	9.3	
15	10.84	.00	.7	1.2	1.3	1.8	2.5	2.8	3.3	4.0	4.5	5.0	5.6	6.0	6.5	7.0	7.3	7.75	8.5	9.2	9.7	
16	10.88	.00	.5	1.3	1.8	1.6	2.1	2.1	2.6	3.25	3.8	4.3	4.8	5.5	6.0	6.3	6.8	7.3	7.75	8.25	8.8	
17	10.78	.00	.3	1.2	1.3	1.25	1.6	2.1	2.6	3.25	3.5	4.25	4.8	5.5	5.8	6.4	6.75	7.25	7.6	8.25	8.75	9.1
18	10.70	.00	.2	1.1	1.1	1.5	2.0	2.1	2.6	3.1	3.6	4.25	4.75	5.4	5.75	6.1	6.75	7.25	7.6	8.1	8.75	9.0
19	10.95	.00	.2	1.0	1.0	1.6	2.0	2.25	2.5	2.75	3.0	3.25	3.75	4.3	5.0	5.6	6.0	6.5	7.0	7.5	8.0	8.75
20	10.97	.00	.2	1.0	1.0	1.6	2.0	2.25	2.5	2.75	3.0	3.25	3.75	4.3	5.0	5.6	6.1	6.75	7.2	7.75	8.2	8.75
21	11.39	2.0	2.5	3.1	3.75	4.2	5.0	5.2	5.5	6.0	6.6	7.3	7.6	8.3	8.75	9.25	9.5	9.75	10.25	10.5	10.59	
22	11.22	2.0	2.6	3.1	3.75	4.2	4.9	5.5	6.0	6.5	7.1	7.6	8.2	8.75	9.25	9.5	9.75	10.25	10.5	10.59		
23	11.97	1.8	2.5	3.0	3.6	4.25	4.75	5.3	5.8	6.5	7.0	7.6	8.2	8.75	9.25	9.5	9.75	10.25	10.5	10.59		
24	11.18	2.0	2.3	3.1	3.75	4.2	4.8	5.3	5.8	6.3	6.8	7.2	7.8	8.3	8.75	9.25	9.5	9.75	10.25	10.5	10.59	
25	11.29	2.1	2.6	3.1	3.8	4.4	4.75	5.5	6.1	6.6	7.2	7.8	8.3	8.75	9.25	9.5	9.75	10.25	10.5	10.59		
26	11.13	2.1	2.75	3.0	4.0	4.5	5.0	5.5	6.2	6.8	7.4	8.5	9.2	9.4	9.75	10.25	10.5	10.75	11.0	11.25		
27	11.29	2.2	3.0	3.5	4.2	4.9	5.0	5.6	6.2	6.6	7.3	8.0	8.5	8.75	9.25	9.5	9.75	10.25	10.5	10.75		
28	11.25	2.1	2.7	3.1	3.75	4.0	4.5	5.1	5.6	6.1	6.75	7.3	7.9	8.3	8.75	9.25	9.5	9.75	10.25	10.5	10.75	
29	11.37	2.1	2.75	3.0	3.75	4.0	4.6	5.1	5.6	6.1	6.75	7.3	7.9	8.3	8.75	9.25	9.5	9.75	10.25	10.5	10.75	
30	11.13	2.1	2.6	3.2	3.8	4.5	5.0	5.6	6.2	6.75	7.25	7.8	8.3	8.75	9.25	9.5	9.75	10.25	10.5	10.75		
31	11.12	1.1	1.5	1.0	1.3	1.8	2.0	2.5	3.1	3.75	4.25	4.75	5.2	5.75	6.3	6.8	7.3	7.8	8.3	8.75	9.25	
41	11.12	1.1	1.5	1.0	1.4	2.0	2.0	2.6	3.1	3.75	4.25	4.75	5.2	5.75	6.3	6.8	7.3	7.8	8.3	8.75	9.25	
42	11.11	1.1	1.6	1.0	1.4	2.0	2.0	2.5	3.0	3.4	4.1	4.5	5.1	5.75	6.25	6.8	7.3	7.8	8.3	8.75	9.25	
43	11.16	1.4	1.9	1.3	1.5	2.0	2.5	3.0	3.4	4.0	4.5	5.1	5.75	6.25	6.8	7.3	7.8	8.3	8.75	9.25	9.5	
44	11.06	1.2	1.75	1.3	1.7	2.1	2.1	2.3	2.8	3.6	4.5	5.0	5.5	5.75	6.6	7.0	7.5	8.0	8.5	9.0	9.5	
45	11.05	1.1	1.6	1.1	1.6	2.1	2.1	2.25	2.5	3.25	3.25	4.4	4.8	5.3	6.0	6.5	7.0	7.5	8.0	8.5	9.0	
46	11.15	1.3	1.75	1.1	1.6	2.1	2.1	2.75	3.25	3.8	4.5	4.8	5.4	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	
47	10.99	0.0	.5	1.0	1.0	1.75	1.3	1.75	2.25	3.0	3.75	4.25	4.75	5.3	5.75	6.3	6.8	7.3	7.8	8.3	8.75	
48	10.98	0.0	.4	1.0	1.0	1.75	1.3	1.75	2.25	3.0	3.75	4.25	4.75	5.3	5.75	6.3	6.8	7.3	7.8	8.3	8.75	
49	11.13	1.0	1.6	1.0	1.3	1.75	1.75	2.25	3.0	3.25	3.75	4.25	4.75	5.3	5.75	6.3	6.8	7.3	7.8	8.3	8.75	
50	12.17	1.0	1.5	1.0	1.3	2.0	2.6	3.1	3.75	4.3	4.75	5.5	6.0	6.75	7.25	7.75	8.0	8.5	8.75	9.0	9.25	
51	11.84	1.1	1.6	1.1	1.6	2.25	2.3	3.0	3.5	4.25	4.6	5.3	5.8	6.3	6.8	7.1	7.6	8.0	8.5	9.0	9.25	
52	12.26	1.0	1.5	1.0	1.3	2.0	2.6	3.25	3.25	3.75	4.25	4.75	5.3	6.0	6.75	7.3	7.8	8.3	8.75	9.0	9.25	
53	12.12	1.0	1.5	1.0	1.3	2.0	2.6	3.1	3.75	4.25	4.75	5.3	6.0	6.75	7.3	7.8	8.3	8.75	9.0	9.25	9.5	
54	12.19	1.0	1.5	1.0	1.3	2.0	2.5	3.0	3.25	3.75	4.25	4.6	5.3	6.0	6.75	7.3	7.8	8.3	8.75	9.0	9.25	
55	12.05	1.0	1.6	1.0	1.6	2.1	2.6	3.1	3.6	4.1	4.75	5.2	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.0	9.25	
56	11.68	1.6	1.6	1.0	1.75	1.75	2.25	2.6	3.1	3.75	4.0	4.75	5.25	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.0	
57	12.09	1.1	1.6	1.0	1.5	2.0	2.6	3.1	3.75	4.25	4.75	5.25	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.0	9.25	
58	12.13	1.1	1.6	1.0	1.5	2.1	2.6	3.1	3.75	4.0	4.75	5.25	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.0	9.25	
59	12.23	1.0	1.5	2.0	2.6	3.1	3.75	4.25	4.75	5.25	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.0	9.25	9.5	9.75	
60	12.23	1.0	1.5	2.0	2.6	3.1	3.75	4.25	4.75	5.25	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.0	9.25	9.5	9.75	

REMARKS: 1. Springs 11 thru 30 stress-relieved only.

2. Springs 41 thru 60 stress-relieved and heat-set.

3. a. Springs 11 thru 20 and 41 thru 50 - Loaded magazine.

b. Spring 21 thru 30 and 51 thru 60 - Empty magazine.

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 4 weeks

TEST NUMBER	TEST NUMBER	LOAD (LBS) AT COMPRESSED HEIGHT OF -- INCHES												TEST NUMBER						
		11.0	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5
11	10.80	.3	.6	1.1	1.6	2.1	2.6	3.2	3.7	4.2	4.7	5.2	5.9	6.3	6.9	7.4	7.8	8.2	8.6	9.2
12	10.67	.3	.75	1.25	1.5	2.2	3.0	3.5	4.0	4.5	4.75	5.4	6.0	6.5	7.0	7.5	8.0	8.3	8.75	9.5
13	10.64	.3	.6	1.1	1.6	2.0	2.6	3.1	3.75	4.1	4.6	5.6	5.8	6.25	6.75	7.3	7.75	8.25	8.6	9.1
14	10.60	.4	.75	1.25	1.6	2.25	2.75	3.5	4.0	4.5	5.1	5.75	6.1	6.6	7.1	7.6	8.1	8.5	9.25	10.0
15	10.63	.25	.5	1.0	1.3	1.8	2.6	3.1	3.6	4.1	4.6	5.3	5.8	6.25	6.6	7.25	7.75	8.1	8.6	9.1
16	10.79	.3	.6	1.1	1.6	2.0	2.6	3.0	3.75	4.1	4.25	4.8	5.5	6.0	6.4	6.8	7.25	7.75	8.8	9.25
17	10.62	.3	.6	1.0	1.3	1.8	2.5	3.0	3.6	4.1	4.6	5.25	5.75	6.1	6.6	7.1	7.5	8.1	8.6	9.0
18	10.57	.25	.6	1.0	1.4	1.8	2.5	3.1	3.6	4.2	4.6	5.25	5.6	6.0	6.5	7.0	7.5	8.0	8.6	9.1
19	10.75	.25	.75	1.1	1.5	2.0	2.5	3.1	3.75	4.3	4.8	5.5	5.8	6.25	6.6	7.25	7.75	8.25	8.75	9.1
20	10.78	.00	.25	.6	1.0	1.5	2.1	2.6	3.25	3.8	4.4	4.75	5.4	5.75	6.25	6.75	7.25	7.5	8.25	8.75
21	13.06	1.5	2.1	2.75	3.25	4.0	4.5	5.0	5.6	6.1	6.75	7.5	8.0	8.75	9.5	10.25	10.75	11.00	11.30	11.60
22	13.04	1.6	2.2	2.6	3.1	4.0	4.5	5.1	5.6	6.2	6.75	7.5	8.0	8.75	9.5	10.25	10.75	11.00	11.30	11.60
23	12.42	1.5	2.0	2.6	3.25	3.8	4.3	5.0	5.5	6.1	6.5	7.25	7.75	8.0	8.75	9.5	10.25	10.75	11.00	11.30
24	13.06	1.6	2.25	2.75	3.3	4.0	4.5	5.1	5.6	6.25	6.75	7.3	7.75	8.0	8.75	9.5	10.25	10.75	11.00	11.30
25	12.65	1.25	1.75	2.3	2.8	3.6	4.25	4.75	5.25	5.75	6.3	6.8	7.5	8.0	8.75	9.5	10.25	10.75	11.00	11.30
26	12.93	1.75	2.5	3.0	3.75	4.5	4.8	5.25	5.75	6.6	7.2	8.1	8.75	9.1	9.75	10.25	10.75	11.00	11.30	11.60
27	13.11	1.6	2.3	3.0	3.5	4.0	4.6	5.1	5.6	6.2	6.75	7.3	8.1	8.75	9.5	10.25	10.75	11.00	11.30	11.60
28	12.97	1.6	2.1	2.75	3.3	4.0	4.6	5.1	5.6	6.25	7.0	7.5	7.8	8.0	8.75	9.5	10.25	10.75	11.00	11.30
29	13.27	1.6	2.1	2.6	3.25	3.8	4.5	5.1	5.6	6.3	6.8	7.3	7.8	8.0	8.75	9.5	10.25	10.75	11.00	11.30
30	12.96	2.3	2.8	3.5	4.1	4.7	5.25	5.75	6.3	6.8	7.5	8.0	8.75	9.1	9.75	10.25	10.75	11.00	11.30	11.60
41	11.11	1.1	.4	1.3	1.7	2.4	2.9	3.5	4.0	4.6	5.1	5.6	6.1	6.8	7.1	7.7	8.2	8.7	9.4	9.6
42	11.29	.7	.4	1.4	1.8	2.4	2.9	3.5	4.1	4.6	5.1	5.6	6.2	6.6	7.4	8.3	8.7	9.2	9.7	10.98
43	10.92	0.0	.2	.3	.3	.4	.4	.5	.5	.6	.7	.8	.9	.9	.9	.9	.9	.9	10.9	10.98
44	10.64	0.0	.4	.5	.5	.6	.7	.8	.9	.9	.9	.9	.9	.9	.9	.9	.9	.9	10.7	11.50
45	11.07	1.1	.4	.6	.6	1.1	1.6	2.2	2.7	3.4	4.4	5.0	5.6	6.7	7.5	8.4	9.3	9.9	10.3	11.2
46	10.98	0.0	.4	.6	.6	1.1	1.6	2.1	2.6	3.4	4.4	4.9	5.6	6.0	6.6	7.4	8.0	8.5	9.0	9.6
47	10.97	0.0	.2	.4	.4	.5	.6	.7	.8	.9	1.0	1.4	2.0	2.4	3.1	3.6	4.1	4.7	5.3	5.7
48	10.90	0.3	.3	.5	.5	.6	.7	.8	.9	1.0	1.4	1.9	2.2	2.7	3.1	3.6	4.1	4.7	5.3	5.7
49	11.10	1.6	.4	.6	.6	1.1	1.6	2.1	2.6	3.4	4.4	5.0	5.6	6.2	6.8	7.4	8.0	8.6	9.2	9.8
50	10.92	0.0	.2	.4	.4	.5	.6	.7	.8	.9	1.0	1.6	2.1	2.6	3.3	3.9	4.4	4.9	5.4	5.9
51	12.14	.3	.1	.1	.1	.2	.2	.3	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4
52	11.37	.3	.1	.1	.1	.2	.2	.3	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4
53	12.23	.1	.1	.1	.1	.2	.2	.3	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4	.4
54	12.03	.6	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1
55	12.16	.7	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1
56	12.73	.7	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1
57	11.66	.5	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1
58	12.10	.6	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1
59	12.11	.6	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1
60	12.22	.6	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1	.1

REMARKS: 1. See Page 35

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-726707B)
STORAGE TEST - 8 weeks

TIME	TEST	LOAD (LBS) AT COMPRESSED HEIGHT OF INDEX												TIME
		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	
11 10.53	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	10.67
12 10.59	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.54
13 10.57	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.54
14 10.57	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.54
15 10.62	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.52
16 10.71	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.52
17 10.61	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.56
18 10.55	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.64
19 10.59	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.52
20 10.75	8.8	7.5	7.1	6.6	6.2	5.8	5.4	5.0	4.6	4.2	3.8	3.4	3.0	10.58
21 10.96	11.5	2.1	2.6	3.1	3.6	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	10.2
22 12.96	11.5	2.1	2.6	3.1	3.6	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	10.2
23 12.73	11.5	2.0	2.6	3.2	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	10.2
24 13.00	11.5	2.3	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.3	7.8	10.2
25 12.62	11.5	2.1	2.6	3.1	3.6	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	10.2
26 12.85	11.5	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	10.2
27 13.38	11.5	2.3	2.8	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	10.2
28 12.87	11.5	2.1	2.6	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	10.2
29 13.06	11.5	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	10.2
30 12.42	11.5	2.2	2.8	3.2	3.7	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	10.2
31 10.96	10.5	1.5	2.1	2.7	3.3	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.1	10.2
32 10.96	10.5	1.5	2.1	2.7	3.3	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.1	10.2
33 10.74	10.5	1.5	2.1	2.7	3.3	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.1	10.2
34 10.77	10.5	1.5	2.1	2.7	3.3	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.1	10.2
35 10.93	10.5	1.5	2.1	2.7	3.3	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.1	10.2
36 10.94	10.5	1.5	2.1	2.7	3.3	3.9	4.5	5.1	5.7	6.3	6.9	7.5	8.1	10.2
37 11.44	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	10.67
38 12.10	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	12.22
39 12.08	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	12.07
40 12.14	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	12.16
41 12.02	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	12.04
42 12.07	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	11.67
43 12.10	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	12.09
44 12.23	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	12.10

REMARKS: 1. See Page 35

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 12 weeks

LOAD (LBS) AT COMPRESSED LENGTH OF -- INCHES											
SPRING	NUMBER	11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5
11	10.67	.88	.5	.9	1.4	2.0	2.4	2.9	3.0	3.6	4.1
12	10.49	.88	.9	1.0	1.5	1.8	2.25	2.75	3.3	4.0	4.6
13	10.36	.88	.1	.4	1.3	1.75	2.1	2.75	3.2	3.9	4.6
14	10.44	.88	.0	.5	.75	1.25	1.6	2.25	2.75	3.75	4.4
15	10.50	.88	.0	.5	.5	1.25	1.6	2.25	2.8	3.3	4.0
16	10.63	.88	.25	.75	1.0	1.3	1.75	2.3	3.0	3.5	4.2
17	10.46	.88	.0	.5	.7	1.2	1.75	2.3	2.75	3.2	3.9
18	10.44	.88	.0	.4	1.0	1.4	1.9	2.3	2.75	3.25	4.0
19	10.63	.88	.25	1.0	1.25	1.6	2.0	2.5	3.1	3.6	4.1
20	10.69	.88	.25	.75	1.3	1.75	2.0	2.5	3.0	3.6	4.25
21	12.99	1.7	2.3	2.75	3.5	4.1	4.6	5.0	5.6	6.1	6.6
22	12.95	1.75	2.3	3.00	3.4	4.0	4.6	5.1	5.75	6.2	6.75
23	12.64	1.95	2.1	2.75	3.3	4.0	4.4	5.0	5.5	6.1	6.6
24	12.93	1.75	2.25	4.8	5.3	5.9	6.4	6.9	7.5	8.0	8.5
25	12.50	1.75	1.9	2.5	3.0	3.75	4.25	4.75	5.4	5.8	6.4
26	12.76	1.6	2.3	2.75	3.3	3.9	4.5	5.1	5.8	6.25	7.0
27	12.98	1.75	2.3	3.0	3.5	4.0	4.6	5.25	5.75	6.2	6.75
28	12.82	1.6	2.2	2.9	3.3	3.9	4.5	5.0	5.75	6.25	6.8
29	13.02	1.6	2.1	2.6	3.3	4.0	4.6	5.2	5.75	6.4	7.0
30	12.69	1.6	2.1	2.75	3.4	4.0	4.5	5.25	5.75	6.3	7.0
41	10.88	.88	.3	.75	1.1	1.6	2.1	2.75	3.3	4.25	5.0
42	10.98	.88	.3	.75	1.25	1.75	2.2	2.8	3.25	4.3	5.0
43	10.76	.88	.3	.8	1.3	2.0	2.5	3.0	3.4	4.3	4.8
44	10.92	.88	.5	1.0	1.7	2.1	2.5	3.0	3.5	4.25	5.0
45	10.82	.88	.3	1.0	1.5	2.1	2.5	3.0	3.5	4.25	5.0
46	10.81	.88	.125	.8	1.1	1.6	2.1	2.6	3.2	3.75	4.25
47	10.81	.88	.25	.75	1.1	1.75	2.25	2.8	3.2	3.8	4.2
48	10.92	.88	.25	.8	1.25	2.0	2.5	3.0	3.5	4.25	4.8
49	10.80	.88	.25	.75	1.0	1.5	2.0	2.5	3.1	3.75	4.2
50	10.76	.88	.3	.6	1.0	1.6	2.0	2.6	3.2	3.6	4.2
51	12.12	.8	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6
52	11.85	.75	1.4	1.8	2.3	2.75	3.2	3.6	4.0	4.5	5.0
53	12.18	.8	1.4	2.0	2.5	3.1	3.6	4.2	4.8	5.4	6.1
54	12.06	.9	1.4	2.0	2.6	3.25	3.75	4.3	4.8	5.5	6.0
55	12.17	1.0	1.5	2.0	2.6	3.25	3.7	4.3	4.8	5.5	6.1
56	12.01	1.0	1.6	2.2	2.75	3.25	3.75	4.3	4.8	5.6	6.0
57	11.66	1.3	1.3	1.8	2.25	2.75	3.0	3.5	4.0	4.6	5.2
58	12.07	1.0	1.6	2.25	2.75	3.15	3.6	4.0	4.5	5.0	5.5
59	12.10	.8	1.25	1.9	2.4	3.0	3.6	4.1	4.75	5.3	5.9
60	12.22	.8	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	6.0

REMARKS: 1. Springs 11 thru 30 stress-relieved only.

2. Springs 41 thru 60 stress-relieved and heat-set.

3. Springs 11 thru 20 and 41 thru 50 - Loaded magazine.

4. Springs 21 thru 30 and 51 thru 60 - Empty magazine.

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 16 weeks

EJECTION SPRINGS		LOAD (LBS) AT COMPRESSED HEIGHT OF - INCHES																				
NUMBER	TEST	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0
11	10.55	.9	.75	1.25	1.75	2.25	2.8	3.3	4.0	4.5	5.0	5.5	6.0	6.3	7.0	7.5	8.0	8.3	8.6	10.0	10.55	
12	10.49	.5	.8	1.25	1.75	2.25	2.75	3.4	4.0	4.5	5.0	5.5	6.0	6.4	7.0	7.5	8.0	8.4	8.7	10.4	10.44	
13	10.47	.25	.5	1.50	2.00	2.5	3.0	3.5	4.2	4.75	5.25	5.75	6.2	6.6	7.0	7.5	8.0	8.4	8.7	10.25	10.52	
14	10.45	.88	.75	1.2	1.75	2.25	2.75	3.2	3.75	4.3	4.8	5.3	5.8	6.25	6.8	7.4	8.0	8.3	8.7	10.5	10.45	
15	10.36	.10	.5	1.0	1.25	1.75	2.25	2.75	3.4	4.0	4.6	5.1	5.5	6.0	6.5	7.0	7.4	8.0	8.3	9.0	10.0	10.51
16	10.74	.88	.75	1.1	1.5	2.00	2.5	3.0	3.5	4.1	4.75	5.3	5.75	6.2	6.6	7.0	7.5	8.0	8.4	8.7	10.3	10.63
17	10.56	.10	.6	1.0	1.25	1.75	2.25	2.8	3.3	4.0	4.5	4.9	5.3	5.8	6.3	6.75	7.0	7.5	8.0	8.5	9.2	10.47
18	10.39	.5	.75	1.25	1.75	2.25	2.75	3.2	3.75	4.3	4.8	5.3	5.8	6.25	6.75	7.3	7.75	8.1	8.5	10.25	10.39	
19	10.34	.2	.5	1.0	1.25	1.75	2.25	2.75	3.3	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.3	7.8	8.2	9.0	10.5	10.54
20	10.69	.2	.6	1.0	1.4	1.75	2.25	2.8	3.5	4.0	4.5	5.1	5.6	6.1	6.6	7.0	7.5	8.0	8.5	9.0	10.2	10.60
21	12.42	1.6	2.25	3.0	3.5	4.0	4.6	5.1	5.75	6.25	6.75	7.25	7.75	8.25	8.75	9.25	9.75	10.25	10.75	11.25	12.42	
22	12.32	1.6	2.0	2.75	3.25	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.25	8.75	9.25	9.75	10.25	10.75	11.25	12.32
23	12.32	1.4	2.0	2.6	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.1	7.5	8.0	8.4	8.8	9.2	9.7	10.2	12.32
24	12.60	1.4	2.0	2.75	3.25	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.6	8.0	8.4	8.8	9.2	9.7	10.2	12.80	
25	12.26	1.0	1.3	1.8	2.35	2.85	3.35	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.6	8.0	8.4	8.8	9.2	10.2	12.26
26	12.20	1.0	1.3	1.8	2.3	2.8	3.0	3.4	4.0	4.25	5.0	5.5	6.25	6.75	7.25	7.6	8.0	8.4	8.8	9.2	10.2	12.20
27	12.36	1.75	2.25	3.0	3.5	4.1	4.5	5.2	5.6	6.25	6.8	7.3	7.8	8.3	8.8	9.3	9.8	10.3	10.8	11.3	12.36	
28	12.79	1.5	2.0	2.75	3.25	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.25	12.79
29	12.59	1.75	2.25	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.2	7.6	8.0	8.4	8.8	9.2	9.7	10.2	11.25	12.59
30	12.63	1.6	2.2	2.8	3.3	3.9	4.4	5.1	5.6	6.25	6.75	7.25	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.25	12.63	
31	10.86	.88	.2	1.4	1.6	2.1	2.6	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	10.2	10.86
32	10.86	.08	.2	1.0	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	10.86
33	10.74	.88	.2	1.0	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	10.74
34	10.81	.88	.2	1.0	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	10.81
35	10.79	.88	.6	1.1	1.3	1.7	2.1	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	10.50
36	10.70	.88	.25	1.0	1.2	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	10.25
37	10.84	.88	.4	1.0	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	10.74
38	10.74	.88	.25	1.0	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	10.74
39	12.30	1.0	1.4	2.1	2.6	3.1	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.2	12.30	
40	12.06	.8	1.3	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.2	12.06	
41	12.14	1.0	1.5	2.1	2.6	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.25	8.75	9.25	9.75	10.25	12.14	
42	12.02	.8	1.3	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.2	12.02	
43	11.89	.6	1.1	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	11.89	
44	11.84	.6	1.1	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	11.84	
45	12.30	1.0	1.4	2.1	2.6	3.1	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.2	12.30	
46	12.16	1.0	1.5	2.1	2.6	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.25	8.75	9.25	9.75	10.25	12.16	
47	11.84	.6	1.1	1.4	1.75	2.25	2.75	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.2	8.7	9.2	11.84	
48	12.05	.75	1.3	2.0	2.5	3.1	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.2	12.05	
49	12.07	1.4	2.1	2.6	3.1	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.2	12.07		
50	12.20	1.0	1.5	2.1	2.6	3.2	3.75	4.25	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.25	8.75	9.25	9.75	10.25	12.20	

REMARKS: 1. See Page 35

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 24 weeks

SPRING NO.	TEST NO.	LOAD (LBS) AT COMPRESSED HEIGHT OF -- INCHES											
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5
11	10.58	0	.0	.5	.8	1.1	1.6	2.1	2.75	3.3	3.8	4.3	4.8
12	10.45	0	0	.4	.6	1.0	1.5	2.0	2.5	3.0	3.75	4.1	4.75
13	10.42	0	0	.5	1.0	1.2	1.6	2.0	2.6	3.1	3.75	4.3	4.8
14	10.39	0	0	.3	.6	1.1	1.5	2.1	2.6	3.1	3.6	4.25	4.75
15	10.42	0	0	.25	.6	1.25	1.6	2.2	2.75	3.25	3.8	4.3	4.8
16	10.62	0	0	.5	.8	1.3	1.75	2.3	2.8	3.5	4.0	4.3	5.1
17	10.39	0	0	.5	.8	1.1	1.6	2.1	2.7	3.1	3.6	4.2	4.75
18	10.33	0	0	.3	.6	1.1	1.6	2.1	2.6	3.1	3.75	4.3	4.8
19	10.34	0	0	.25	1.1	1.4	1.6	2.0	2.5	3.1	3.75	4.3	4.75
20	10.56	0	0	.5	1.0	1.4	1.8	2.3	2.8	3.3	4.0	4.4	5.0
21	12.42	1.1	1.6	2.25	2.8	3.5	4.0	4.5	5.0	5.5	6.1	6.75	7.1
22	12.87	1.5	2.0	2.5	3.2	3.75	4.3	5.0	5.5	6.0	6.5	6.8	7.1
23	12.59	1.3	1.9	2.4	3.0	3.6	4.2	4.8	5.4	5.9	6.5	6.8	7.1
24	12.76	1.3	2.0	2.6	3.2	3.75	4.3	5.0	5.6	6.2	6.8	7.1	7.5
25	12.76	.6	1.0	1.5	2.0	2.5	3.2	3.6	4.25	5.0	5.5	6.0	6.5
26	12.68	1.5	2.1	2.75	3.2	4.0	4.4	4.8	5.0	6.0	6.5	7.1	7.5
27	12.92	1.5	2.2	2.75	3.4	4.0	4.25	5.0	5.5	6.2	6.75	7.25	7.75
28	12.74	1.4	2.0	2.5	3.0	3.75	4.2	4.9	5.4	5.9	6.4	6.8	7.25
29	12.94	1.6	2.0	2.75	3.75	4.4	5.0	5.6	6.2	6.8	7.5	8.0	8.75
30	12.64	1.5	2.0	2.6	3.3	3.75	4.3	5.0	5.6	6.25	6.8	7.5	8.25
41	10.80	0	.2	.6	1.0	1.5	2.0	2.6	3.1	3.75	4.25	4.8	5.4
42	10.76	0	.1	.5	1.0	1.5	2.0	2.6	3.0	3.6	4.25	4.75	5.3
43	10.66	0	.2	.6	1.1	1.6	2.1	2.4	3.0	3.5	4.1	4.6	5.25
44	10.79	0	.25	.6	1.0	1.5	2.0	2.6	3.25	3.75	4.25	4.8	5.4
45	10.71	0	.25	.6	1.0	1.5	2.0	2.6	3.1	3.75	4.4	4.75	5.5
46	10.69	0	.2	.6	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.6	5.25
47	10.70	0	.1	.6	1.1	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.3
48	10.74	0	.25	.5	.9	1.4	1.8	2.5	3.0	3.5	4.0	4.5	5.2
49	10.70	0	.2	.5	.8	1.3	1.5	2.3	3.0	3.5	4.1	4.75	5.3
50	10.60	0	.25	.6	1.0	1.5	2.0	2.6	3.2	3.75	4.3	4.8	5.3
51	12.01	1.0	1.5	2.0	2.5	3.1	3.6	4.1	4.75	5.25	6.0	6.5	7.1
52	11.34	.75	1.25	1.75	2.25	2.8	3.3	3.8	4.5	5.0	5.6	6.1	6.75
53	12.17	1.0	1.5	2.0	2.5	3.1	3.6	4.2	4.75	5.25	6.0	6.5	7.1
54	12.05	.9	1.3	1.8	2.4	3.0	3.6	4.2	4.6	5.25	5.9	6.4	7.0
55	12.13	1.0	1.4	2.0	2.5	3.0	3.6	4.25	4.8	5.3	6.0	6.5	7.1
56	12.01	.9	1.6	1.9	2.5	3.0	3.5	4.1	4.6	5.25	5.8	6.4	6.8
57	11.64	.75	1.1	1.6	2.1	2.6	3.1	3.8	4.4	5.0	5.6	6.1	6.75
58	12.06	1.0	1.4	2.0	2.5	3.0	3.6	4.25	4.75	5.3	6.0	6.6	7.1
59	12.06	.8	1.4	2.0	2.5	3.0	3.6	4.1	4.6	5.25	6.0	6.4	7.0
60	12.19	1.0	1.5	2.0	2.5	3.0	3.75	4.25	4.6	5.25	6.0	6.6	7.1

REMARKS: 1. See Page 35

RIFLE, 7.62MM, M14, SPRING, MAGAZINE (C-7267078)
STORAGE TEST - see Remarks

Spring No.	Length	Load (Lbs.) At Compressed Height of -- INCHES												Remarks									
		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5										
21	11.59	.25	.6	1.0	1.6	2.4	2.75	3.25	3.75	4.25	4.75	5.3	5.8	6.3	6.6	7.2	7.75	8.25	8.6	9.25	9.8	11.25	
22	11.28	.25	.3	1.0	1.4	2.1	2.6	3.1	3.5	4.0	4.6	5.2	5.75	6.2	6.75	7.2	7.8	8.3	8.8	9.25	9.8	11.19	
23	11.17	.25	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.1	5.6	6.2	6.75	7.2	7.8	8.2	8.6	9.2	9.8	11.05	
24	11.35	.2	.6	1.0	1.4	2.0	2.6	3.1	3.6	4.1	4.5	5.2	5.75	6.3	6.8	7.4	7.8	8.3	8.6	9.4	9.8	11.18	
25	11.06	0	.5	.8	1.3	1.9	2.4	2.8	3.5	4.0	4.5	5.1	5.6	6.1	6.6	7.25	7.7	8.0	8.5	9.25	10.0	10.99	
26	11.35	.2	.6	1.0	1.5	2.0	2.4	3.0	3.6	4.2	4.6	5.3	5.8	6.3	6.9	7.5	7.9	8.5	9.0	9.3	10.0	11.16	
27	11.73	.5	.5	1.2	1.75	2.3	2.8	3.4	3.9	4.3	5.0	5.6	5.8	6.4	6.9	7.5	7.8	8.25	8.9	9.2	9.8	11.3	11.30
28	11.36	.25	.75	1.2	1.75	2.2	2.8	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.3	8.75	9.3	9.75	11.1	11.24
29	11.68	.25	.6	1.2	1.6	2.1	2.6	3.4	3.8	4.4	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.8	9.5	10.0	11.30	
30	11.32	.1	.6	1.0	1.6	2.1	2.75	3.2	3.75	4.3	4.8	5.4	5.8	6.4	7.0	7.5	7.8	8.5	8.8	9.5	10.0	11.30	
31	11.53	.25	.75	1.2	1.75	2.3	2.8	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.8	9.5	10.0	11.25	
32	11.39	.25	.75	1.2	1.6	2.1	2.6	3.4	3.8	4.3	4.8	5.4	5.8	6.3	6.8	7.3	7.8	8.3	8.75	9.5	9.75	11.5	11.37
33	11.53	.3	.75	1.25	1.75	2.3	2.7	3.5	4.0	4.5	5.0	5.6	6.2	6.6	7.1	7.6	8.2	8.75	9.5	9.75	10.3	11.3	11.24
34	11.38	.25	.75	1.25	1.75	2.3	2.8	3.5	4.0	4.5	5.0	5.6	6.1	6.6	7.1	7.6	8.2	8.75	9.3	9.8	10.25	11.5	11.46
35	11.50	.25	.6	1.25	2.0	2.3	2.8	3.5	4.0	4.5	5.1	5.6	6.1	6.6	7.1	7.5	8.0	8.4	8.75	9.3	10.0	10.5	11.5
36	11.31	.2	.6	1.1	1.6	2.1	2.6	3.3	3.8	4.3	4.8	5.1	5.6	6.2	6.6	7.1	7.6	8.2	8.8	9.3	9.8	10.5	11.43
37	11.20	.2	.6	1.1	1.6	2.1	2.6	3.3	3.8	4.3	4.8	5.1	5.6	6.2	6.6	7.1	7.6	8.2	8.8	9.3	9.8	10.5	11.43
38	11.56	.25	.6	1.2	1.6	2.2	2.75	3.3	3.75	4.3	4.8	5.0	5.5	6.0	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.5	11.49
39	11.44	.25	.75	1.2	1.6	2.2	2.75	3.3	3.8	4.3	4.8	5.1	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.5	11.46
40	11.72	.5	1.0	1.6	2.0	2.6	3.2	3.8	4.3	4.8	5.1	5.6	6.1	6.6	7.1	7.5	8.0	8.4	8.8	9.4	10.0	11.46	
41	11.72	.5	1.0	1.6	2.1	2.5	3.25	3.6	4.25	4.75	5.25	5.75	6.3	6.75	7.2	7.7	8.2	8.7	9.25	9.6	10.3	11.25	
42	11.85	.75	1.1	1.5	2.1	2.5	3.2	3.6	4.25	4.75	5.25	5.75	6.3	6.75	7.2	7.7	8.2	8.7	9.25	9.6	10.3	11.25	
43	11.80	.25	.6	1.2	1.6	2.2	2.75	3.3	3.75	4.3	4.8	5.0	5.5	6.0	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.5	
44	11.73	.6	1.25	1.75	2.3	2.8	3.5	4.0	4.5	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.5	11.5	
45	11.42	.5	1.0	1.5	2.0	2.5	3.25	3.75	4.3	4.8	5.1	5.6	6.1	6.6	7.1	7.5	8.0	8.4	8.8	9.4	10.0	11.36	
46	11.46	.8	1.0	1.5	2.0	2.5	3.2	3.7	4.3	4.8	5.1	5.6	6.1	6.6	7.1	7.5	8.0	8.4	8.8	9.4	10.0	11.46	
47	11.77	.6	1.1	1.5	2.1	2.6	3.1	3.75	4.3	4.75	5.25	5.75	6.3	6.75	7.2	7.7	8.0	8.5	8.8	9.3	10.0	11.46	
48	11.20	.6	1.1	1.5	2.1	2.5	3.1	3.75	4.3	4.75	5.25	5.75	6.3	6.75	7.2	7.7	8.0	8.5	8.8	9.3	10.0	11.46	
49	11.52	.75	1.2	1.75	2.3	2.8	3.5	4.0	4.5	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
50	11.61	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.1	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
51	11.54	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
52	11.39	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
53	11.54	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
54	11.60	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
55	11.40	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
56	11.50	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
57	11.44	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
58	11.40	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
59	11.44	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
60	11.72	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
61	11.77	.6	1.1	1.5	2.1	2.6	3.1	3.75	4.3	4.75	5.25	5.75	6.3	6.75	7.2	7.7	8.0	8.5	8.8	9.3	10.0	11.46	
62	11.20	.6	1.1	1.5	2.1	2.6	3.1	3.75	4.3	4.75	5.25	5.75	6.3	6.75	7.2	7.7	8.0	8.5	8.8	9.3	10.0	11.46	
63	11.52	.75	1.2	1.75	2.3	2.8	3.5	4.0	4.5	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
64	11.61	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
65	11.54	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
66	11.39	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
67	11.54	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
68	11.60	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
69	11.44	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
70	11.64	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
71	11.62	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
72	11.65	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
73	11.50	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
74	11.54	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0	8.5	8.8	9.3	10.0	11.46	
75	11.60	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.2	4.75	5.2	5.6	6.1	6.6	7.1	7.5	8.0						

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (G-7267C78)
STORAGE TEST - see Remarks

SPRING NO.	TEST NO.	TEST DATE	LOAD (LB.) AT COMPRESSION LENGTH OF - INCHES											
			1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5
1* 11.69	.6	11.0	10.5	10.0	9.5	9.0	8.5	8.2	7.9	7.6	7.3	7.0	6.8	6.5
2 11.80	.75	1.2	1.6	2.0	2.6	3.2	3.75	4.25	4.6	5.0	5.25	5.6	6.0	6.3
3 11.76	1.2	1.6	1.5	2.2	2.6	3.25	3.75	4.3	4.75	5.15	5.5	5.75	6.0	6.4
4 11.68	.75	1.25	1.8	2.4	2.6	3.15	3.75	4.3	4.8	5.4	6.0	6.4	6.9	7.2
5 11.38	.6	1.1	1.5	1.8	2.4	3.0	3.6	4.1	4.75	5.25	5.75	6.2	6.5	7.0
6 11.80	.8	1.2	1.8	2.2	2.8	3.25	3.75	4.2	4.8	5.3	6.0	6.5	7.0	7.5
7 11.73	.8	1.3	1.75	2.2	2.75	3.2	3.75	4.2	4.8	5.3	6.0	6.5	7.0	7.5
8 11.68	.75	1.2	1.75	2.2	2.6	3.0	3.75	4.2	4.8	5.3	6.0	6.4	7.0	7.5
9 11.64	.6	1.0	1.5	2.0	2.5	3.1	3.6	4.1	4.75	5.25	5.75	6.2	6.75	7.25
10 11.76	.6	1.1	1.6	2.2	2.6	3.0	3.6	4.1	4.75	5.25	5.75	6.25	6.75	7.25
31 11.52	.5	1.0	1.5	2.0	2.5	3.0	3.75	4.2	4.75	5.25	5.75	6.0	6.5	7.0
32 11.49	.4	1.3	1.8	2.3	2.75	3.0	3.75	4.25	4.75	5.25	5.75	6.0	6.5	7.0
33 11.53	.3	1.2	1.75	2.2	2.75	3.0	3.75	4.1	4.75	5.25	5.75	6.3	6.8	7.3
34 11.44	.4	1.25	1.8	2.3	2.75	3.0	3.5	4.0	4.5	5.1	5.6	6.25	6.75	7.25
35 11.59	.3	1.3	2.0	2.5	3.0	3.5	4.0	4.5	5.1	5.75	6.25	6.75	7.25	7.75
36 11.59	.3	1.3	1.9	2.5	3.0	3.5	4.0	4.5	5.2	5.75	6.3	6.75	7.4	7.9
37 11.58	.3	1.3	1.9	2.5	3.0	3.6	4.0	4.5	5.1	5.6	6.25	6.75	7.3	7.8
38 11.49	.3	1.2	1.75	2.3	2.75	3.0	3.5	4.0	4.5	5.0	5.6	6.25	6.75	7.25
39 11.54	.3	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.6	6.25	6.75	7.25
40 11.50	.5	1.0	1.4	1.8	2.25	2.75	3.2	3.75	4.25	4.6	5.1	5.6	6.25	6.75
1* 11.66	.5	1.8	1.5	2.1	2.3	3.0	3.5	4.0	4.6	5.2	5.6	6.2	6.8	7.3
2 11.77	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.1	4.6	5.1	5.6	6.25	6.75	7.25
3 11.72	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.6	6.25	6.75	7.25
4 11.70	.6	1.2	1.75	2.2	2.75	3.2	3.75	4.0	4.5	5.1	5.6	6.25	6.75	7.25
5 11.42	.5	1.0	1.6	2.1	2.3	2.8	3.3	3.8	4.3	4.8	5.3	6.0	6.4	6.8
6 11.77	.6	1.2	1.6	2.1	2.3	3.0	3.6	4.1	4.6	5.1	5.6	6.25	6.75	7.25
7 11.69	.5	1.0	1.5	2.0	2.5	3.0	3.6	4.1	4.6	5.1	5.6	6.25	6.75	7.25
8 11.65	.4	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.6	6.25	6.75	7.25
9 11.75	.6	1.2	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.1	5.6	6.25	6.75	7.25
10 11.60	.4	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.6	6.25	6.75	7.25
31 11.42	.4	1.4	1.9	1.2	2.0	2.2	3.0	3.6	4.1	4.5	5.0	5.5	6.25	6.75
32 11.41	.3	1.2	1.75	2.0	2.3	3.0	3.5	4.0	4.5	5.0	5.6	6.25	6.75	7.25
33 11.49	.3	1.4	1.25	1.8	2.3	3.0	3.4	4.0	4.5	5.0	5.6	6.25	6.75	7.25
34 11.40	.2*	1.75	1.1	1.6	2.0	2.5	3.0	3.6	4.0	4.5	5.0	5.25	5.75	6.25
35 11.55	.3	1.0	1.5	1.8	2.3	2.8	3.3	3.8	4.3	4.8	5.3	6.0	6.5	7.0
36 11.34	.3	1.8	1.5	2.0	2.3	3.0	3.5	4.2	4.6	5.0	5.3	5.75	6.25	6.75
37 11.50	.3	1.2	1.25	1.75	2.1	2.6	3.1	3.6	4.1	4.6	5.1	5.6	6.25	6.75
38 11.46	.3	1.1	1.75	2.1	2.5	3.0	3.5	4.0	4.5	5.0	5.4	5.9	6.25	6.75
39 11.53	.3	1.25	1.75	2.2	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.25	6.75	7.25
40 11.50	.3	1.1	1.75	2.25	2.8	3.3	3.8	4.3	4.8	5.3	5.8	6.25	6.75	7.25

REMARKS: 1. Springs No. 1* thru No. 10 and No. 31 thru No. 40 were stored FREE for 16 weeks.
 2. Spring No. 1** thru No. 10 and No. 31 thru No. 40 were stored FREE for 24 weeks.

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7257078)
STORAGE TEST - see Remarks

SPRING NO.	TEST NO.	LOAD (LB) AT COMPRESSED LENGTH OF . . . INCHES										TEST NO.										
		9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5											
11* 10.46	0	.4	1.1	1.5	2.0	2.6	3.25	3.75	4.25	4.8	5.4	5.75	6.3	6.5	7.0	7.5	8.0	8.5	9.0	9.4	10.46	
12 10.22	0	.25	.5	.8	1.4	2.0	2.5	3.1	3.6	4.25	4.75	5.3	5.75	6.25	6.45	7.0	7.4	8.0	8.5	9.0	9.5	10.36
13 10.36	0	.2	.5	.8	1.4	2.0	2.5	3.1	3.6	4.25	4.75	5.25	5.75	6.25	6.45	7.0	7.4	8.0	8.5	9.0	9.5	10.35
14 10.35	0	.25	.5	.8	1.4	2.0	2.5	3.1	3.6	4.25	4.75	5.25	5.75	6.25	6.45	7.0	7.4	8.0	8.5	9.0	9.5	10.35
15 10.35	1.00	.25	.5	.8	1.4	2.0	2.5	3.1	3.6	4.25	4.75	5.25	5.75	6.2	6.4	7.0	7.4	8.0	8.5	9.0	9.4	10.35
21 11.16	1.6	.4	1.3	1.75	2.1	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
22 11.18	1.0	.75	1.25	1.6	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
23 11.06	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
24 11.18	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
25 11.06	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
41 10.72	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
42 10.70	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
43 10.62	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
44 10.66	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
45 10.70	1.5	.75	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.9	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.8	10.35	
51 11.34	1.0	1.25	2.1	2.5	3.1	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	9.4	10.35	
52 11.36	1.0	1.25	2.0	2.6	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	9.4	10.35	
53 11.44	1.0	1.25	2.1	2.6	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	9.4	10.35	
54 11.46	1.0	1.25	2.1	2.6	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	9.4	10.35	
55 11.49	1.0	1.25	2.1	2.6	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	9.4	10.35	
11 10.44	1.1	1.4	2.0	2.5	3.1	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	9.4	10.35	
12 16.32	1.25	.5	1.4	2.0	2.5	3.1	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
13 10.36	.25	.5	1.4	2.0	2.5	3.1	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
14 10.34	.25	.5	1.4	2.0	2.5	3.1	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
15 10.35	.25	.5	1.4	2.0	2.5	3.1	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
21 10.96	.6	1.0	1.4	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
22 11.06	.75	1.25	1.75	2.25	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
23 10.92	.75	1.25	1.75	2.25	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
24 11.08	.75	1.25	1.75	2.25	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
25 10.92	.75	1.25	1.75	2.25	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
41 10.72	.6	1.0	1.4	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
42 10.70	.6	1.0	1.4	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
43 10.62	.5	1.0	1.4	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
44 10.65	.4	1.0	1.4	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
45 10.66	.4	1.0	1.4	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
51 11.16	.25	1.0	1.5	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
52 11.24	.25	1.0	1.5	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
53 11.30	.25	1.0	1.5	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
54 11.30	.25	1.0	1.5	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	
55 11.30	.25	1.0	1.5	2.1	2.75	3.25	3.75	4.1	4.5	4.9	5.3	5.7	6.1	6.5	6.9	7.3	7.7	8.1	8.5	8.9	10.35	

REMARKS: 1. Spring stored for 48 weeks then subjected to actual weapon firing (7 loadings).
 No malfunction attributable to the magazine assembly was reported.

2. *Results prior to weapon firing:
 a. Springs 11 thru 15 - loaded - stress-relieved only.
 b. Springs 21 thru 25 - empty, one loading at 24 weeks - stress-relieved and heat-set.
 c. Springs 41 thru 45 - loaded - stress-relieved and heat-set.
 d. Springs 51 thru 55 - empty, one loading at 24 weeks - stress-relieved and heat-set.

#Results after weapon firing.

APPENDIX A

REPORT
S-TR11-2643

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - see Remarks

LOAD (LBS) AT COMPRESSED HEIGHT OF - INCHES		INCHES																		
DEPTH	WEIGHT	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0
10.42	10.42	.6	1.0	1.6	2.1	2.6	3.1	3.75	4.25	4.75	5.3	5.75	6.25	6.75	7.1	7.6	8.3	8.5	9.75	10.33
10.36	10.36	.9	1.0	1.6	2.1	2.6	3.1	3.75	4.25	4.75	5.3	5.75	6.25	6.75	7.1	7.6	8.3	8.6	9.75	10.46
10.49	10.49	0	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.8	5.4	5.9	6.5	7.0	7.5	7.75	8.25	8.6	9.75	10.46
10.49	10.49	0	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.8	5.4	5.9	6.5	7.0	7.5	7.75	8.25	8.6	9.75	10.46
10.45	10.45	0	1.25	1.75	2.25	2.75	3.25	3.8	4.3	4.8	5.4	5.9	6.5	7.0	7.5	7.75	8.25	8.6	9.75	10.43
11.16	11.16	.25	.50	1.0	1.5	2.0	2.5	3.1	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.3	8.5	11.16
11.19	11.19	.3	.6	1.1	1.6	2.1	2.6	3.1	3.75	4.25	4.75	5.4	5.9	6.5	7.0	7.5	7.75	8.25	8.5	11.16
11.26	11.26	.25	.5	1.0	1.5	2.0	2.5	3.25	3.75	4.25	4.75	5.4	5.9	6.5	7.0	7.5	7.75	8.25	8.5	11.26
11.30	11.30	.3	.6	1.1	1.6	2.1	2.6	3.25	3.75	4.25	4.8	5.5	6.1	6.6	7.1	7.6	8.3	8.5	11.30	
11.23	11.23	.25	.5	1.0	1.5	2.0	2.5	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.3	8.5	11.23	
10.73	10.73	0	.25	1.0	1.6	2.1	2.75	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.3	8.5	10.1	
10.70	10.70	0	.25	1.0	1.6	2.1	2.75	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.3	8.5	10.65	
10.64	10.64	0	.25	1.0	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.3	5.9	6.5	7.0	7.5	8.0	8.5	10.66	
10.64	10.64	0	.25	1.0	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.3	5.9	6.5	7.0	7.5	8.0	8.5	10.66	
10.64	10.64	0	.25	1.0	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.3	5.9	6.5	7.0	7.5	8.0	8.5	10.64	
11.26	11.26	.25	.5	1.0	1.5	2.0	2.5	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.3	8.5	11.26	
11.16	11.16	.2	.4	1.0	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.3	8.5	11.16	
11.33	11.33	.4	.75	1.25	1.75	2.25	2.75	3.50	4.0	4.5	5.0	5.6	6.25	6.8	7.4	8.0	8.4	8.8	9.75	
11.39	11.39	.3	.6	1.1	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.3	5.9	6.5	7.0	7.5	8.0	8.4	11.38	
11.47	11.47	.4	.75	1.25	1.75	2.25	2.75	3.50	4.0	4.5	5.0	5.6	6.25	6.8	7.4	8.0	8.4	8.8	9.75	
10.47	10.47	0	0	.5	.8	1.3	1.8	2.3	2.8	3.3	3.8	4.4	5.1	5.6	6.1	6.6	7.1	7.6	8.1	10.46
10.33	10.33	.2	.4	1.0	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.1	8.5	10.31	
10.32	10.32	.3	.6	1.1	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.1	8.5	10.31	
10.46	10.46	0	0	.5	.75	1.25	1.75	2.25	2.75	3.25	3.75	4.3	5.0	5.6	6.1	6.6	7.1	7.6	8.1	10.45
10.44	10.44	0	0	.5	.75	1.25	1.75	2.25	2.75	3.25	3.75	4.3	5.0	5.6	6.1	6.6	7.1	7.6	8.1	10.45
11.34	11.34	.25	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	11.34	
11.34	11.34	.25	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	11.34	
10.66	10.66	0	.25	.6	1.0	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	10.65
10.66	10.66	0	.25	.6	1.0	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	10.64
11.17	11.17	.25	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	11.17	
11.04	11.04	.1	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	11.04	
11.38	11.38	.4	.6	1.1	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.1	8.5	11.34	
11.30	11.30	.3	.6	1.1	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.1	8.5	11.30	
11.35	11.35	.4	.6	1.1	1.6	2.1	2.6	3.25	3.75	4.25	4.75	5.4	6.0	6.6	7.1	7.6	8.1	8.5	11.35	

REMARKS: 1- Sprines stored for 52 weeks (1 year), then subjected to actual weapon firing (7 loadings)

- Spring #18 - 1 stubbed round

Spring #19 - 2 stubbed round

Spring #57 - 1 partial override

2. *Results prior to weapon firing:

 - a. Springs 16 thru 20 - loaded - stress-relieved only
 - b. Springs 26 thru 30 - empty, one loading at 24 wks - stress-relieved only.
 - c. Springs 46 thru 50 - loaded - stress-relieved and heat-set
 - d. Springs 56 thru 60 - empty - one loading at 24 weeks - stress-relieved and heat-set.

APPENDIX A

REPORT
SA-TR11-2643

RIFLE, 7.26MM, M14, SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 2 years

- REMARKS:**

 1. All springs were stress-relieved only.
 2. Springs 11 thru 20 stored loaded.
 3. Springs 21 thru 30 stored unloaded.
 4. *Load and height checks prior to weapon firing.
 5. **Load and height checks after six weapon loadings.

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 2 years

SPRING	ENGINE TIME	LOAD (OZ) AT COMPRESSED HEIGHT OF --- INCHES											
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5
41*	10.67	0	.25	.5	.8	1.3	1.8	2.5	3.0	3.5	4.0	4.5	5.25
42	10.68	0	.25	.5	.8	1.3	1.8	2.5	3.0	3.5	4.0	4.5	5.25
43	10.58	0	.1	.4	.75	1.1	1.75	2.4	2.8	3.4	4.0	4.5	5.1
44	10.60	0	.1	.4	.75	1.1	1.75	2.3	2.75	3.3	3.9	4.3	5.0
45	10.63	0	.1	.4	.75	1.1	1.75	2.3	2.8	3.3	3.9	4.4	5.0
46	10.61	0	.1	.4	.8	1.3	1.8	2.3	2.8	3.3	3.8	4.4	5.0
47	10.60	0	.1	.4	.8	1.3	1.8	2.3	2.8	3.3	3.8	4.4	5.0
48	10.63	0	.25	.5	.9	1.4	1.9	2.4	3.0	3.5	4.0	4.5	5.0
49	10.65	0	.25	.5	1.0	1.4	1.9	2.4	3.0	3.4	4.0	4.4	4.9
50	10.60	0	.1	.4	1.8	1.3	1.9	2.4	3.0	3.5	4.0	4.5	5.0
51	11.24	.25	.4	.8	1.4	1.9	2.5	3.0	3.5	4.0	4.75	5.3	5.8
52	11.22	.25	.4	.8	1.4	1.9	2.5	3.0	3.5	4.0	4.75	5.25	5.75
53	11.24	.25	.4	.8	1.4	1.9	2.5	3.0	3.5	4.0	4.75	5.25	5.75
54	11.28	.25	.4	.8	1.4	1.9	2.5	3.0	3.5	4.0	4.75	5.3	5.8
55	11.28	.25	.4	.8	1.5	2.0	2.5	3.0	3.6	4.1	4.75	5.25	5.75
56	11.17	.25	.5	1.0	1.4	1.8	2.4	2.9	3.4	4.0	4.6	5.0	5.5
57	11.00	0	.4	.8	1.3	1.75	2.3	2.75	3.4	4.1	4.6	5.0	5.5
58	11.34	.25	.6	1.0	1.4	1.9	2.3	3.0	3.6	4.25	4.75	5.25	5.75
59	11.28	.25	.5	1.0	1.4	1.9	2.5	2.9	3.5	4.1	4.75	5.25	5.75
60	11.28	.25	.5	1.0	1.4	1.9	2.25	2.75	3.5	4.1	4.6	5.1	5.6
4b	10.70	0	.3	.6	.8	1.4	1.8	2.3	2.8	3.4	4.0	4.5	5.1
42	10.68	0	.25	.5	.8	1.3	1.75	2.3	2.75	3.5	4.0	4.5	5.1
43	10.55	0	.1	.3	.5	1.1	1.6	2.1	2.6	3.3	3.8	4.3	4.9
44	10.58	0	.1	.3	.5	1.25	1.6	2.1	2.6	3.4	3.8	4.4	5.0
45	10.57	0	.1	.3	.5	1.25	1.6	2.1	2.6	3.4	3.8	4.4	5.0
46	10.62	0	.1	.3	.5	1.3	1.75	2.3	2.75	3.3	3.8	4.4	4.9
47	10.61	0	.1	.3	.5	1.25	1.6	2.1	2.6	3.3	3.8	4.4	4.9
48	10.50	0	.0	.3	.5	1.25	1.5	2.1	2.6	3.4	3.9	4.4	4.9
49	10.63	0	.25	.6	1.0	1.3	1.75	2.3	2.75	3.5	4.0	4.5	5.1
50	10.55	0	.1	.5	.8	1.25	1.6	2.1	2.6	3.4	3.9	4.4	5.0
51	11.17	.1	.4	.8	1.4	2.0	2.5	3.0	3.4	4.0	4.5	5.1	5.6
52	11.22	.25	.5	.8	1.4	2.0	2.5	3.0	3.5	4.0	4.6	5.0	5.6
53	11.25	.25	.5	.8	1.4	2.0	2.5	3.0	3.5	4.0	4.6	5.1	5.6
54	11.28	.25	.5	.8	1.5	2.0	2.5	3.0	3.5	4.0	4.6	5.1	5.6
55	11.25	.25	.5	.8	1.5	2.0	2.5	3.0	3.5	4.0	4.6	5.1	5.6
56	11.13	.1	.4	.8	1.4	1.9	2.5	3.0	3.4	4.0	4.5	5.0	5.4
57	11.00	0	.4	.6	1.0	1.4	1.9	2.3	2.8	3.3	3.8	4.4	4.8
58	11.40	.3	.6	1.0	1.4	1.9	2.3	2.8	3.3	3.6	4.1	4.6	5.1
59	11.20	.25	.5	.8	1.5	2.0	2.6	3.0	3.5	4.0	4.5	5.0	5.5
60	10.75	0	.3	.6	1.4	1.8	2.3	2.8	3.4	3.8	4.3	4.75	5.25

- REMARKS:
1. All springs were stress-relieved and heat-set.
 2. Springs 41 thru 50 stored loaded.
 3. Springs 51 thru 60 stored unloaded.
 4. *Load and height checks prior to weapon firing.
 5. **Load and height checks after six weapon loadings.

APPENDIX A

REPORT
IA-TR11-2643RIFLE, 7.62MM, M14, SPRING MAGAZINE (C7267078)
STORAGE TEST - 3 years

LOAD ON SPRING	LOAD (LBS) AT COMPRESSED LENGTH OF												INCHES
	11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	
11.0	10.30	0	0	.29	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
12	10.16	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
13	10.24	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
14	10.18	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
15	10.24	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
16	10.32	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
17	10.24	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
18	10.16	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
19	10.30	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
20	10.28	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
21	10.36	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
22	10.32	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
23	10.37	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
24	10.38	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
25	10.32	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
26	10.35	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
27	11.02	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
28	11.02	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
29	11.03	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
30	11.02	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
31	10.36	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
32	10.16	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
33	10.24	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
34	10.16	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
35	10.22	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
36	10.28	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
37	10.22	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
38	10.15	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
39	10.28	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
40	10.28	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
41	10.35	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
42	10.32	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
43	10.36	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
44	10.32	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
45	10.35	0	0	.1	.3	.5	.7	.9	1.1	1.3	1.5	1.7	1.9
46	11.00	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
47	11.02	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
48	11.03	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
49	11.02	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0
50	10.36	0	0	.25	.4	.6	.8	1.0	1.2	1.4	1.6	1.8	2.0

REMARKS: 1. All springs were stress-relieved only.

2. Springs 11 thru 20 stored loaded.

3. Springs 21 thru 30 stored unloaded.

4. Load and height checks prior to weapon firing.

5. *Load and height checks after six weapon loadings.

APPENDIX A

REPORT
SA-TR11-2643RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST - 3 years

SPRING NO.	TEST HEIGHT	LOAD (LBS) AT COMPRESSED HEIGHT OF --- INCHES										FREE HEIGHT												
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5		5.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0		
41*	10.64	0	.1	.3	.6	1.25	1.75	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.25	6.5	7.0	7.5	8.1	8.5	9.0	10.1	10.62	
42	10.58	0	.1	.3	.75	1.1	1.75	2.25	3.0	3.5	4.0	4.6	5.1	5.6	6.25	6.5	7.0	7.5	8.1	8.5	9.0	10.0	10.57	
43	10.56	0	.1	.3	.75	1.1	1.75	2.25	3.0	3.5	4.0	4.6	5.0	5.5	6.1	6.6	7.1	7.6	8.1	8.5	9.0	10.0	10.54	
44	10.52	0	.1	.25	.6	1.1	1.6	2.1	2.75	3.3	4.1	4.3	4.9	5.3	6.0	6.25	6.75	7.3	7.75	8.4	9.25	10.0	10.62	
45	10.50	0	.0	.25	.6	1.1	1.6	2.1	2.75	3.3	4.1	4.3	4.9	5.3	6.0	6.25	6.75	7.3	7.75	8.3	9.0	10.0	10.50	
46	10.52	0	.1	.3	.75	1.1	1.75	2.25	3.0	3.5	4.0	4.4	4.9	5.4	5.8	6.3	6.8	7.4	7.8	8.4	9.0	10.1	10.62	
47	10.57	0	.1	.3	.75	1.1	1.75	2.25	3.0	3.5	4.0	4.6	5.0	5.5	5.8	6.3	6.8	7.3	7.75	8.5	9.0	10.0	10.56	
48	10.58	0	.0	.25	.5	1.1	1.6	2.1	2.75	3.25	3.8	4.3	4.8	5.3	5.8	6.4	7.0	7.4	7.8	8.4	8.75	9.75	10.38	
49	10.50	0	.0	.25	.6	1.1	1.6	2.1	2.75	3.25	3.8	4.3	4.8	5.3	5.8	6.4	7.0	7.4	7.8	8.4	8.6	9.0	10.50	
50	10.52	0	.0	.25	.6	1.1	1.6	2.1	2.8	3.4	4.0	4.5	5.0	5.5	6.1	6.6	7.1	7.6	8.1	8.6	9.0	10.0	10.50	
51	11.20	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.1	4.6	5.1	5.5	6.1	6.6	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.51	
52	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.1	4.6	5.1	5.5	6.1	6.6	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.51	
53	11.22	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.51	
54	11.24	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.51	
55	11.24	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.1	4.6	5.1	5.6	6.1	6.6	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.51	
56	11.14	1	.25	.75	1.25	1.75	2.25	2.9	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.4	8.9	9.0	10.0	11.13	
57	11.00	0	.25	.75	1.25	1.75	2.25	2.8	3.5	4.0	4.5	5.0	5.4	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.0	10.0	11.00	
58	11.40	1	.4	.8	1.3	1.8	2.3	3.0	3.6	4.1	4.6	5.0	5.6	6.1	6.6	7.1	7.6	8.1	8.5	9.0	9.5	10.0	11.40	
59	11.20	1	.3	.8	1.3	1.8	2.3	3.0	3.5	4.1	4.6	5.0	5.5	6.0	6.4	6.9	7.4	7.9	8.4	8.9	9.0	10.0	11.20	
60	10.60	0	.1	.6	.8	1.25	1.75	2.4	3.0	3.5	4.0	4.5	5.1	5.6	6.1	6.6	7.0	7.5	8.0	8.5	9.0	9.5	10.60	
61*	10.62	0	.1	.3	.8	1.25	1.75	2.3	2.9	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	10.55		
62	10.54	0	.1	.3	.75	1.1	1.75	2.25	2.75	3.3	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	10.55		
63	10.50	0	.0	.25	.6	1.0	1.6	2.1	2.75	3.25	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.4	7.8	8.4	8.75	9.6	10.38	
64	10.52	0	.0	.25	.6	1.1	1.6	2.1	2.75	3.25	3.8	4.3	4.8	5.3	5.8	6.4	7.0	7.5	8.0	8.6	9.0	10.0	10.50	
65	10.56	0	.1	.3	.8	1.25	1.75	2.3	2.9	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	10.0	11.13	
66	10.56	0	.1	.3	.75	1.1	1.75	2.25	2.75	3.3	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	10.0	11.13	
67	10.36	0	.0	.25	.6	1.0	1.6	2.1	2.75	3.25	3.8	4.3	4.8	5.3	5.8	6.3	6.8	7.4	7.8	8.4	8.75	9.6	10.38	
68	11.20	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.20	
69	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.18	
70	11.22	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.22	
71	11.24	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.24	
72	11.24	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.24	
73	11.12	1	.25	.75	1.25	1.75	2.25	2.9	3.5	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.12	
74	11.00	0	.25	.75	1.25	1.75	2.25	2.9	3.5	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.00	
75	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.18	
76	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.18	
77	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.18	
78	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.18	
79	11.18	1	.3	.8	1.3	1.8	2.3	3.0	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	11.18	
80	10.50	0	.1	.6	.8	1.25	1.75	2.3	2.9	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.50

- REMARKS:
1. All springs were stress-relieved and heat-set.
 2. Springs 41 thru 50 stored loaded.
 3. Springs 51 thru 60 stored unloaded.
 4. *Load check prior to weapon firing.
 5. **Load check after six weapon loadings.

APPENDIX A

CA-TR11-2643 REPORT

APPENDIX A

REPORT
SA-TRII-2643

RIFLE 7.62MM M14 SPRING, MAGAZINE (C7267078)

Spec No.	Magazine Condition	Specification	Hot Storage Test - Temperature +165°F ± 170°F												Remarks	
			2	4	6	8	10	14	16	20	24	36	52	90	120	
Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Weeks	Loss	Paddings	Loss	Loss	
67	Unloaded	Free length	11.65"	11.25"	11.24"	11.21"	11.17"	11.15"	11.13"	11.13"	11.12"	.53"	11.11"	.02"	1.10"	
F1	3.6.5"	Free length	2.754	2.754	2.754	2.504	2.504	2.44	2.44	2.44	2.34	2.34	7.254	.754	.754	
F2	3.5.5"	Free length	5.39	5.39	5.39	5.758	5.758	5.64	5.64	5.64	5.64	5.64	5.64	-	.754	
69	Unloaded	Free length	11.55"	11.28"	11.11"	11.08"	11.02"	10.99"	10.99"	10.99"	10.99"	10.99"	56"	56"	.754	
F1	3.8.5"	Free length	2.34	2.34	2.44	2.44	2.44	2.34	2.34	2.34	2.34	2.34	2.34	.03"	.59"	
F2	3.5.5"	Free length	5.39	5.39	5.39	5.64	5.64	5.54	5.54	5.54	5.44	5.44	5.44	.03"	.554	
75	Unloaded	Free length	12.13"	12.02"	12.02"	12.02"	12.01"	12.01"	12.00"	12.00"	12.00"	12.00"	12.00"	12.00"	.54"	.54"
F1	3.6.5"	Free length	3.64	3.64	3.64	3.64	3.64	3.59	3.59	3.59	3.59	3.59	3.59	.54"	.54"	
F2	3.5.5"	Free length	7.18	6.94	6.94	6.94	6.94	6.94	6.94	6.94	6.94	6.94	6.94	.54"	.54"	
77	Unloaded	Free length	11.91"	11.83"	11.83"	11.82"	11.82"	11.82"	11.80"	11.80"	11.80"	11.80"	11.80"	.50"	.50"	
F1	3.5.5"	Free length	3.38	3.38	3.28	3.24	3.24	3.24	3.24	3.24	3.18	3.18	3.18	.16	.34	
F2	3.5.5"	Free length	6.756	6.756	6.69	6.64	6.64	6.64	6.64	6.64	6.58	6.58	6.58	.16	.34	
79	Unloaded	Free length	16.07"	12.79"	12.79"	12.79"	12.79"	12.60"	12.60"	12.60"	12.60"	12.60"	12.60"	1.10"	1.10"	
F1	3.5.5"	Free length	6.48	5.98	4.758	4.758	4.58	4.34	4.34	4.18	4.18	4.18	4.18	1.06	3.46	
F2	3.5.5"	Free length	9.68	8.58	8.05	8.04	7.98	7.84	7.84	7.64	7.64	7.64	7.64	1.154	3.59	
83	Unloaded	Free length	14.12"	12.80"	12.80"	12.80"	12.75"	12.62"	12.57"	12.54"	12.49"	12.47"	12.47"	1.19"	1.19"	
F1	3.5.5"	Free length	6.69	5.13	4.758	4.758	4.58	4.34	4.34	4.258	4.258	4.258	4.258	1.19"	3.46	
F2	3.5.5"	Free length	9.68	8.69	8.092	8.04	7.98	7.754	7.754	7.58	7.58	7.58	7.58	1.19"	3.46	
68	Loaded	Free length	11.56"	10.25"	9.83"	9.74	9.57"	9.42"	9.39"	9.33"	9.33"	9.33"	9.33"	9.33"	9.33"	
F1	3.5.5"	Free length	6.24	5.15	4.758	4.504	4.18	3.94	3.94	3.64	3.64	3.64	3.64	9.33"	9.33"	
F2	3.5.5"	Free length	9.48	8.258	7.509	6.258	6.98	6.758	6.758	6.64	6.64	6.64	6.64	9.33"	9.33"	
70	Loaded	Free length	11.59"	10.20"	9.86	9.67"	9.59"	9.45"	9.41"	9.39"	9.35"	9.35"	9.35"	9.35"	9.35"	
F1	3.5.5"	Free length	6.38	5.09	4.758	4.504	4.28	3.754	3.754	3.64	3.64	3.64	3.64	9.35"	9.35"	
F2	3.5.5"	Free length	9.58	8.258	7.63	7.34	7.18	7.04	7.04	6.66	6.66	6.66	6.66	9.35"	9.35"	
76	Loaded	Free length	12.20"	11.46"	10.37"	10.28"	10.06"	9.94"	9.91"	9.70"	9.67"	9.67"	9.67"	9.67"	9.67"	
F1	3.5.5"	Free length	7.38	6.15	5.29	5.18	4.758	4.24	4.24	3.94	3.94	3.94	3.94	9.67"	9.67"	
F2	3.5.5"	Free length	10.39	9.34	8.38	8.18	7.64	7.48	7.48	7.04	7.04	7.04	7.04	9.67"	9.67"	
78	Loaded	Free length	11.21"	11.40"	10.35"	10.24"	10.02"	9.96"	9.94"	9.82"	9.78"	9.78"	9.78"	9.78"	9.78"	
F1	3.5.5"	Free length	7.756	6.16	5.258	5.04	4.58	4.254	4.254	4.04	4.04	4.04	4.04	9.78"	9.78"	
F2	3.5.5"	Free length	10.38	9.38	8.38	8.18	7.64	7.48	7.48	7.04	7.04	7.04	7.04	9.78"	9.78"	
94	Loaded	Free length	14.17"	11.02"	9.79"	9.95	9.72"	9.51"	9.48"	9.42"	9.42"	9.42"	9.42"	9.42"	9.42"	
F1	3.5.5"	Free length	9.68	5.04	4.58	4.08	3.69	3.69	3.69	3.48	3.48	3.48	3.48	9.42"	9.42"	
F2	3.5.5"	Free length	11.754	9.04	8.05	7.64	7.16	6.64	6.64	6.64	6.64	6.64	6.64	6.64	6.64	
96	Loaded	Free length	14.25"	11.09"	9.94"	9.88"	9.64"	9.56"	9.53"	9.50"	9.46"	9.46"	9.46"	9.46"	9.46"	
F1	3.5.5"	Free length	9.74	5.64	4.88	4.63	4.08	3.754	3.754	3.754	3.754	3.754	3.754	3.754	3.754	
F2	3.5.5"	Free length	11.97	9.04	8.04	7.54	7.04	6.94	6.94	6.84	6.754	6.754	6.754	6.754	6.754	
98	Unloaded	Free length	11.0	10.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5	5.0	4.5	4.0	
99	Unloaded	Free length	.25	.6	1.0	1.5	2.0	2.25	3.5	4.1	4.6	5.1	5.6	6.1	6.75	
100	Unloaded	Free length	9.38	0	0	0	0	.75	1.25	1.8	2.3	3.0	3.6	4.25	5.0	
101	Unloaded	Free length	10.96	0	1.0	1.5	2.0	2.3	3.0	3.5	4.1	4.6	5.1	5.6	6.25	
102	Unloaded	Free length	9.36	0	0	0	0	0	0.75	1.25	1.8	2.3	2.8	3.25	4.0	
103	Unloaded	Free length	.5	1.0	1.5	2.0	2.5	3.1	3.50	4.0	4.6	5.1	5.6	6.1	6.75	
104	Unloaded	Free length	9.46	0	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.25	
105	Unloaded	Free length	11.30	-.4	1.0	1.4	1.8	2.4	3.0	3.5	4.0	4.5	5.0	5.5	6.25	
106	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
107	Unloaded	Free length	11.30	-.4	1.0	1.4	1.8	2.4	3.0	3.5	4.0	4.5	5.0	5.5	6.25	
108	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
109	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
110	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
111	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
112	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
113	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
114	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
115	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
116	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
117	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
118	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
119	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
120	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
121	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
122	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
123	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
124	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
125	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
126	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
127	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
128	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
129	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
130	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
131	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
132	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
133	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
134	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
135	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
136	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
137	Unloaded	Free length	9.46	0	0	0	0	0	0.5	1.0	1.5	2.0	2.5	3.0	3.75	
138	Unloaded	Free length	9.46	0	0	0	0									

APPENDIX A

SA-TR11-2643

RIFLE 7.62mm, M14 SPRING, MAGAZINE (C-7267078)
COLD STORAGE TEST - Temperature -65°F

Magazine Condition	Specification	TESTS												Remarks							
		2	4	6	8	10	12	16	20	36	52	Load	Loss	Loss	Total						
63 Unloaded	Free length	11.61"	11.59"	11.59"	11.59"	11.57"	11.50"	11.47"	11.47"	11.47"	11.47"	.14"	11.20	.27"	.41"						
	P 0.5"	2.99	2.750	2.750	2.750	2.750	2.750	2.69	2.69	2.69	2.69	.39	2.66	-	.39						
65 Unloaded	Free length	11.53"	11.51"	11.51"	11.51"	11.51"	11.50"	11.46"	11.46"	11.46"	11.46"	.08"	11.04	.41"	.49"						
	P 0.5"	2.89	2.750	2.750	2.750	2.750	2.750	2.750	2.750	2.750	2.750	.039	2.59	.259	.49						
67 Unloaded	Free length	12.19"	12.17"	12.17"	12.17"	12.15"	12.13"	12.10	12.08	12.07	12.05	.14"	11.44	.61"	.75"						
	P 0.5"	3.76	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	.29	3.64	.39	.69						
71 Unloaded	Free length	12.19"	12.17"	12.17"	12.17"	12.15"	12.13"	12.10	12.08	12.07	12.05	.14"	11.44	.61"	.75"						
	P 0.5"	3.76	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	.29	3.64	.39	.69						
73 Unloaded	Free length	12.19"	12.17"	12.17"	12.16"	12.16"	12.15"	12.13	12.12	12.11	12.10	.09"	11.20	.90"	.99"						
	P 0.5"	3.76	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	.29	3.64	.39	.69						
75 Unloaded	Free length	12.19"	12.17"	12.17"	12.17"	12.15"	12.13"	12.10	12.08	12.07	12.05	.131"	11.32	1.54	2.85"						
	P 0.5"	3.76	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	.29	3.64	.39	.69						
81 Unloaded	Free length	12.21"	12.23"	12.23"	12.23"	12.20"	12.18"	12.16	12.15	12.14	12.13	.121"	11.40	1.60	2.81"						
	P 0.5"	3.76	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	.29	3.64	.39	.69						
85 Unloaded	Free length	12.21"	12.23"	12.23"	12.23"	12.20"	12.18"	12.16	12.15	12.14	12.13	.121"	11.40	1.60	2.81"						
	P 0.5"	3.76	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	3.56	.29	3.64	.39	.69						
64 Loaded	Free length	16.17"	13.26"	13.15"	13.06"	13.06"	13.06"	13.06	13.06	13.06	13.06	.131"	10.62	.131"	.93"						
	P 0.5"	6.49	5.20	4.79	4.79	4.79	4.79	4.79	4.79	4.79	4.79	.29	5.64	.39	.69						
66 Loaded	Free length	16.21"	13.23"	13.13"	13.06"	13.06"	13.06"	13.06	13.06	13.06	13.06	.131"	10.62	.131"	.93"						
	P 0.5"	6.49	5.20	4.79	4.79	4.79	4.79	4.79	4.79	4.79	4.79	.29	5.64	.39	.69						
68 Loaded	Free length	16.21"	13.23"	13.13"	13.06"	13.06"	13.06"	13.06	13.06	13.06	13.06	.131"	10.62	.131"	.93"						
	P 0.5"	6.49	5.20	4.79	4.79	4.79	4.79	4.79	4.79	4.79	4.79	.29	5.64	.39	.69						
70 Loaded	Free length	11.53"	11.36"	11.34"	11.30"	11.30"	11.30"	11.30	11.30	11.30	11.30	.131"	10.62	.131"	.93"						
	P 0.5"	6.29	5.750	5.40	5.40	5.40	5.40	5.40	5.40	5.40	5.40	.29	5.64	.39	.69						
74 Loaded	Free length	11.43"	11.23"	11.23"	11.23"	11.23"	11.23"	11.23	11.23	11.23	11.23	.131"	10.62	.131"	.93"						
	P 0.5"	6.29	5.750	5.40	5.40	5.40	5.40	5.40	5.40	5.40	5.40	.29	5.64	.39	.69						
76 Loaded	Free length	12.30"	11.70"	11.54"	11.46"	11.46"	11.46"	11.46	11.46	11.46	11.46	.131"	10.62	.131"	.93"						
	P 0.5"	7.29	6.30	6.250	6.19	6.19	6.19	6.19	6.19	6.19	6.19	.29	5.64	.39	.69						
78 Loaded	Free length	10.65"	9.59	9.59	9.59	9.59	9.59	9.59	9.59	9.59	9.59	.131"	10.62	.131"	.93"						
	P 0.5"	7.29	6.30	6.250	6.19	6.19	6.19	6.19	6.19	6.19	6.19	.29	5.64	.39	.69						
80 Loaded	Free length	16.13"	11.73"	11.73"	11.65"	11.65"	11.65"	11.65	11.65	11.65	11.65	.131"	10.62	.131"	.93"						
	P 0.5"	9.79	6.59	6.250	6.19	6.19	6.19	6.19	6.19	6.19	6.19	.29	5.64	.39	.69						
82 Loaded	Free length	16.22"	11.75"	11.52"	11.45"	11.45"	11.45"	11.45	11.45	11.45	11.45	.131"	10.62	.131"	.93"						
	P 0.5"	9.79	6.59	6.04	6.04	6.04	6.04	6.04	6.04	6.04	6.04	.29	5.64	.39	.69						
84 Loaded	Free length	11.68	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	.131"	10.62	.131"	.93"						
	P 0.5"	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	.29	5.64	.39	.69						
86 Loaded	Free length	11.68	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	.131"	10.62	.131"	.93"						
	P 0.5"	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	9.75	.29	5.64	.39	.69						
Summary		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	1.0	
		63	11.20	.75	1.25	1.75	2.25	2.6	3.25	4.3	4.8	5.25	6.4	6.8	7.25	7.75	8.4	8.75	9.4	11.16	
		64	10.62	0	.25	1.0	1.5	2.0	2.6	3.1	4.1	4.6	5.25	6.0	6.4	6.75	7.0	7.75	8.25	9.4	10.62
		65	11.04	-1	.50	1.0	1.5	2.0	2.5	3.2	4.25	4.75	5.25	6.0	6.25	6.75	7.1	7.75	8.25	9.5	10.74
		66	10.56	0	.1	.5	1.0	1.5	2.0	2.6	3.0	3.6	4.1	4.6	5.25	6.0	6.25	6.75	7.1	7.75	9.4
		71	11.44	1.0	1.5	2.0	2.4	2.75	3.0	4.2	4.5	4.9	5.5	6.1	6.6	7.3	7.9	8.5	9.6	10.1	11.42
		72	10.91	1.0	1.5	2.0	2.4	2.75	3.0	4.2	4.5	4.9	5.5	6.1	6.6	7.3	7.9	8.5	9.6	10.1	11.42
		72	10.72	0	.5	1.25	1.75	2.25	2.75	3.25	3.75	4.25	4.75	5.25	5.8	6.3	6.8	7.3	7.8	8.3	10.72
		73	10.72	0	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	10.72
		74	10.46	0	.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	10.46
		80	10.08	0	.3	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	10.08
		81	10.08	0	.3	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	10.08
		82	10.08	0	.3	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	10.08

LOAD AT COMPRESSED LENGTH OF - INCHES

RIFLE, 7.62MM, M14, SPRING, MAGAZINE (C-7267078)

STORAGE TEST, 5 Years - See Remarks

SPRING #	EFFECT	LOAD (LBS) AT COMPRESSED LENGTH OF..... INCHES												EFFECT										
		11.0	10.5	10.0	9.5	9.0	8.5	8.0	7.5	7.0	6.5	6.0	5.5											
11*	10.20	0	.1	.4	.75	1.3	1.75	2.4	3.0	3.5	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.4	8.0	8.5	9.5	10.18		
12	10.14	0	0	.1	.3	.75	1.1	1.75	2.3	2.8	3.5	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.4	10.14	
13	10.18	0	0	.1	.4	.75	1.25	1.75	2.1	3.0	3.5	4.1	4.6	5.1	5.6	6.0	6.4	7.0	7.5	8.0	8.5	9.3	10.18	
14	10.16	0	0	.1	.3	.75	1.1	1.75	2.25	2.8	3.4	4.0	4.6	5.1	5.6	6.0	6.4	7.0	7.5	8.0	8.4	9.3	10.16	
15	10.18	0	0	.1	.4	.75	1.25	1.75	2.4	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.5	7.0	7.5	8.0	8.5	9.3	10.18	
16	10.30	0	0	.25	.6	1.0	1.25	2.0	2.5	3.0	3.5	4.1	4.75	5.25	5.6	6.1	6.5	7.1	7.6	8.1	8.5	9.5	10.26	
17	10.18	0	0	.1	.3	.75	1.25	1.75	2.5	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.5	7.0	7.5	8.0	8.4	9.4	10.16	
18	10.12	0	0	.1	.3	.75	1.1	1.75	2.25	3.0	3.4	4.0	4.6	5.1	5.5	6.0	6.5	7.0	7.5	8.0	8.4	9.3	10.12	
19	10.30	0	0	.1	.4	.75	1.4	1.8	2.14	2.8	3.5	4.1	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.1	8.5	9.5	10.26	
20	10.26	0	0	.1	.3	.75	1.5	1.8	2.4	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.26	
21	10.80	0	0	.1	.3	.75	1.25	2.0	2.5	3.0	3.5	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.80	
22	10.92	0	0	.1	.3	.75	1.0	1.4	2.0	2.5	3.0	3.5	4.1	4.6	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.92
23	10.82	0	0	.1	.3	.75	1.25	2.0	2.5	3.0	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.82
24	10.96	0	0	.1	.3	.75	1.1	1.4	2.25	2.5	3.0	3.5	4.1	4.6	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.96
25	11.00	0	0	.25	.6	1.1	1.6	2.1	2.6	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	11.00	
26	10.96	0	0	.1	.3	.75	1.0	1.4	2.0	2.5	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.96
27	10.78	0	0	.1	.25	.75	1.25	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.4	10.78	
28	10.82	0	0	.1	.3	.8	1.3	2.0	2.6	3.0	3.5	4.1	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.4	10.82	
29	10.96	0	0	.1	.3	.75	1.1	1.6	2.1	2.6	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.96
30	10.96	0	0	.1	.25	.75	1.1	1.6	2.1	2.6	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.96
31*	10.18	0	0	.1	.1	.75	1.25	1.75	2.4	3.0	3.5	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.4	8.0	8.5	9.5	10.18	
32	10.14	0	0	.1	.3	.75	1.1	1.75	2.1	2.8	3.5	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.4	10.14	
33	10.16	0	0	.1	.4	.75	1.25	1.75	2.3	3.0	3.5	4.1	4.6	5.1	5.6	6.0	6.4	7.0	7.5	8.0	8.5	9.3	10.16	
34	10.16	0	0	.1	.3	.75	1.1	1.75	2.15	2.8	3.4	4.0	4.6	5.1	5.6	6.0	6.4	7.0	7.5	8.0	8.5	9.3	10.16	
35	10.18	0	0	.1	.4	.75	1.25	1.75	2.4	3.0	3.5	4.1	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.5	9.3	10.18	
36	10.26	0	0	.1	.3	.75	1.1	1.75	2.1	2.6	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.26
37	10.80	0	0	.1	.3	.75	1.25	1.75	2.0	2.5	3.0	3.5	4.1	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.1	8.5	9.5	10.80
38	10.92	0	0	.1	.5	1.0	1.4	2.0	2.5	3.10	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.92	
39	10.32	0	0	.1	.3	.75	1.25	1.75	2.0	2.5	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.32
40	10.96	0	0	.1	.3	1.0	1.4	2.0	2.5	3.1	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.96	
41	10.78	0	0	.1	.25	.75	1.1	1.75	2.15	2.8	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.78	
42	10.78	0	0	.1	.3	.75	1.1	1.75	2.15	2.8	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.78	
43	10.84	0	0	.1	.4	.75	1.4	1.8	2.4	2.8	3.5	4.1	4.75	5.25	5.75	6.25	6.75	7.25	7.75	8.1	8.5	9.5	10.84	
44	10.26	0	0	.1	.4	.75	1.5	1.8	2.4	3.0	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.26	
45	10.80	0	0	.1	.3	.75	1.25	1.75	2.0	2.5	3.0	3.5	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.80
46	10.92	0	0	.1	.5	1.0	1.4	2.0	2.5	3.10	3.5	4.1	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.92	
47	10.32	0	0	.1	.3	.75	1.25	1.75	2.0	2.5	3.1	3.6	4.0	4.6	5.1	5.6	6.1	6.6	7.1	7.6	8.1	8.4	9.4	10.32
48	10.96	0	0	.1	.3	1.0	1.4	2.0	2.5	3.1	3.6	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.96	
49	10.78	0	0	.1	.25	.75	1.1	1.75	2.15	2.8	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.78	
50	10.96	0	0	.1	.3	.75	1.1	1.75	2.15	2.8	3.4	4.0	4.6	5.1	5.6	6.0	6.5	7.0	7.5	8.0	8.4	9.4	10.96	

REMARKS: 1. All springs were stress-relieved for 30 minutes at 400°F.

2. Springs 11 thru 20 were stored loaded.

3. Springs 21 thru 30 were stored unloaded.

4. *Load and height checks prior to weapon firing.

5. **Load and height checks after weapon firing.

RIFLE, 7.62MM, M14 SPRING, MAGAZINE (C-7267078)
STORAGE TEST, 5 Years - See Remarks

ELEMNT	SPRING	LOAD (LBS) AT COMPRESSED LENGTH OF												INCHES									
		9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5		
41*	10.58	.0	.1	.3	.8	1.25	1.75	2.3	2.8	3.4	3.8	4.6	5.0	5.5	6.0	6.5	7.0	7.4	7.8	8.3	8.8	9.75	
42	10.56	0	.1	.3	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.1	5.5	5.8	6.5	6.8	7.5	7.8	8.4	8.8	9.6	
43	10.52	0	.1	.3	.75	1.1	1.75	2.25	2.6	3.5	4.0	4.5	5.0	5.5	6.0	6.5	6.8	7.4	8.0	8.4	8.8	10.56	
44	10.58	.1	.3	.8	1.1	1.75	2.3	2.6	3.5	4.0	5.0	5.4	6.0	6.3	7.0	7.3	7.75	8.25	8.8	9.0	9.6	10.52	
45	10.46	0	.25	.6	1.1	1.6	2.1	2.75	3.4	4.0	4.5	5.0	5.3	5.8	6.5	7.0	7.4	7.8	8.4	8.8	9.5	10.58	
46	10.50	0	.25	.6	1.1	1.6	2.1	2.75	3.5	4.0	4.5	5.0	5.4	5.8	6.5	7.0	7.4	7.8	8.4	8.8	9.6	10.46	
47	10.50	0	.25	.6	1.1	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.4	5.8	6.5	7.0	7.4	7.8	8.4	8.8	9.6	10.50	
48	10.40	0	.25	.6	1.0	1.6	2.1	2.75	3.3	3.75	4.3	4.8	5.3	5.8	6.3	6.8	7.4	7.8	8.4	8.8	9.5	10.40	
49	10.50	0	.25	.6	1.1	1.6	2.1	2.8	3.4	4.0	4.4	4.8	5.4	5.8	6.4	6.8	7.4	8.0	8.5	8.75	9.6	10.50	
50	10.50	0	.25	.6	1.1	1.6	2.1	2.8	3.5	4.0	4.4	4.8	5.1	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	10.50
51	11.14	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.1	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.6	9.0	
52	11.14	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
53	11.20	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
54	11.22	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
55	11.20	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
56	11.10	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
57	11.00	0	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
58	11.34	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
59	11.18	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.4	6.8	7.4	8.0	8.5	8.75	9.6	
60	10.56	.0	.1	.6	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
41*	10.56	0	.1	.3	.8	1.25	1.75	2.25	2.75	3.4	3.75	4.6	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
42	10.56	0	.1	.25	.75	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
43	10.52	0	.1	.25	.75	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
44	10.58	0	.1	.25	.75	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
45	10.44	0	.25	.6	1.25	1.75	2.25	2.75	3.4	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
46	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
47	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
48	10.40	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
49	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
50	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
51	11.14	.1	.25	.75	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
52	11.14	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
53	11.20	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
54	11.22	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
55	11.20	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
56	11.10	.1	.25	.75	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
57	11.00	0	.25	.75	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
58	11.34	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
59	11.18	.1	.25	.75	1.25	1.75	2.25	2.75	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6	
60	10.44	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
41*	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
42	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
43	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
44	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
45	10.50	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		
46	10.44	0	.25	.6	1.25	1.75	2.25	2.75	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	8.75	9.6		


- REMARKS : 1. All springs were stress-relieved for 30 minutes at 400°F and heat-set.
 (Compress to five inches and heat at 400°F for one hour).
2. Springs 41 thru 50 were stored loaded.
3. Springs 51 thru 60 were stored unloaded.
4. *Load and height checks prior to weapon firing
5. **Load and height checks after weapon firing.

APPENDIX B

**REPORT
SA-TR11-2643**


ILLUSTRATIONS

<u>Drawing</u>	<u>Title Caption</u>
1. C7267078, Rev E, 18 Feb 59	Spring, Magazine (Standard)
2. C7267078, Rev F, 15 Jan 60	Spring, Magazine (Standard)
3. C7267078, Rev G, 21 Nov 62	Spring, Magazine (Standard)
4. SA-C38193, 9 Jan 57	Spring, Magazine (Experimental)

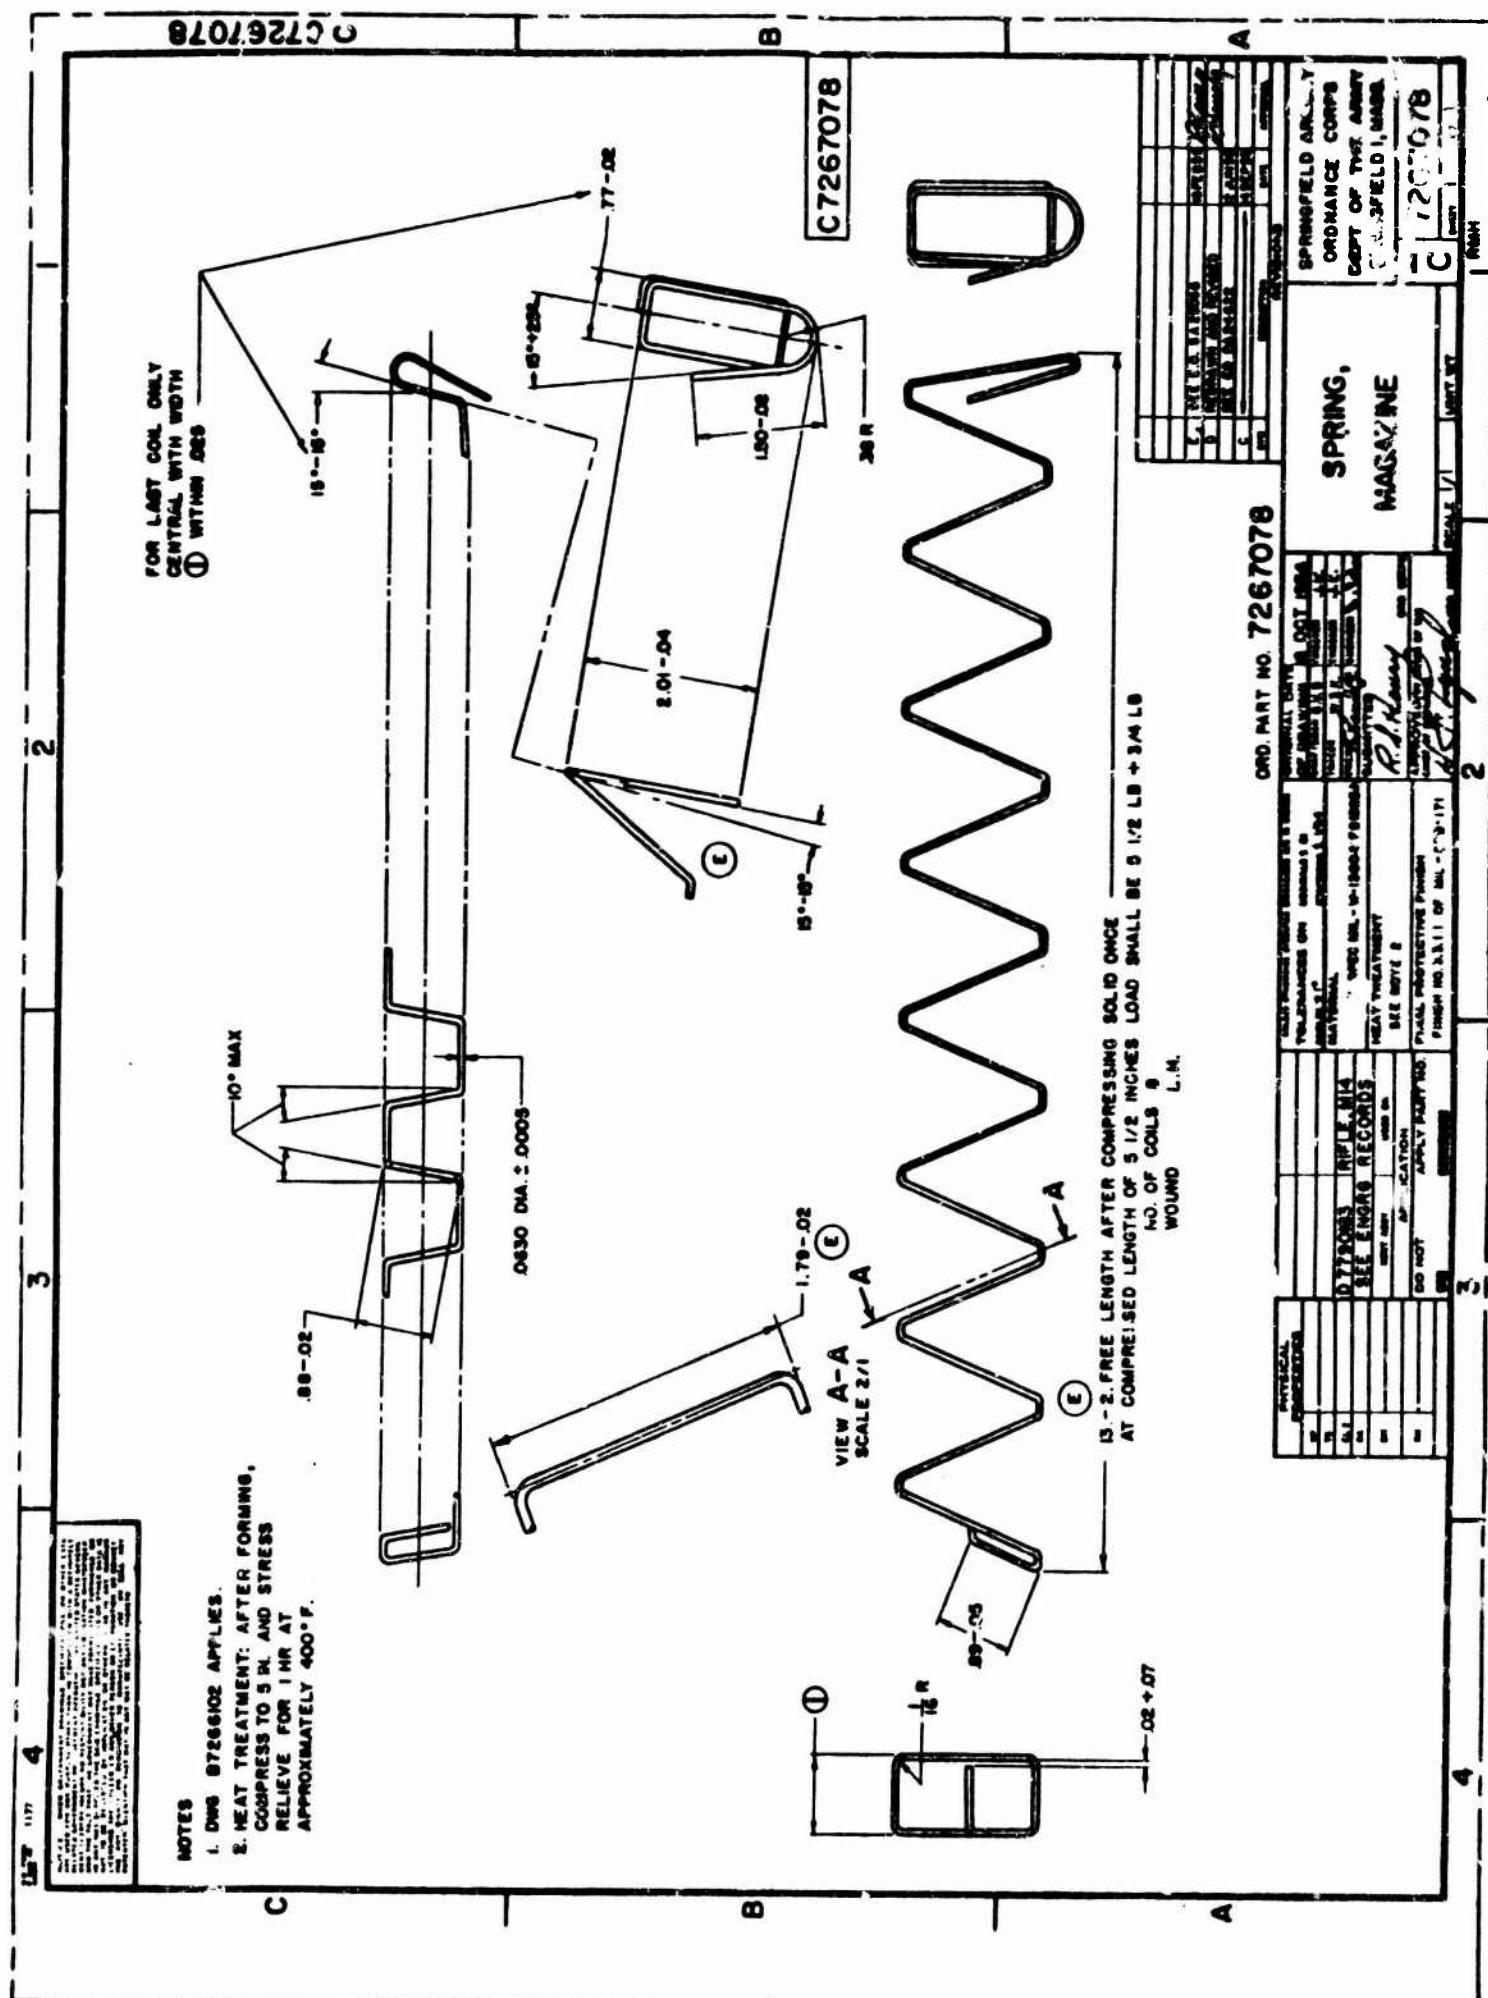

C7267078

FOR LAST COIL ONLY
CENTRAL WITH WIDTH
① WITHIN OP5

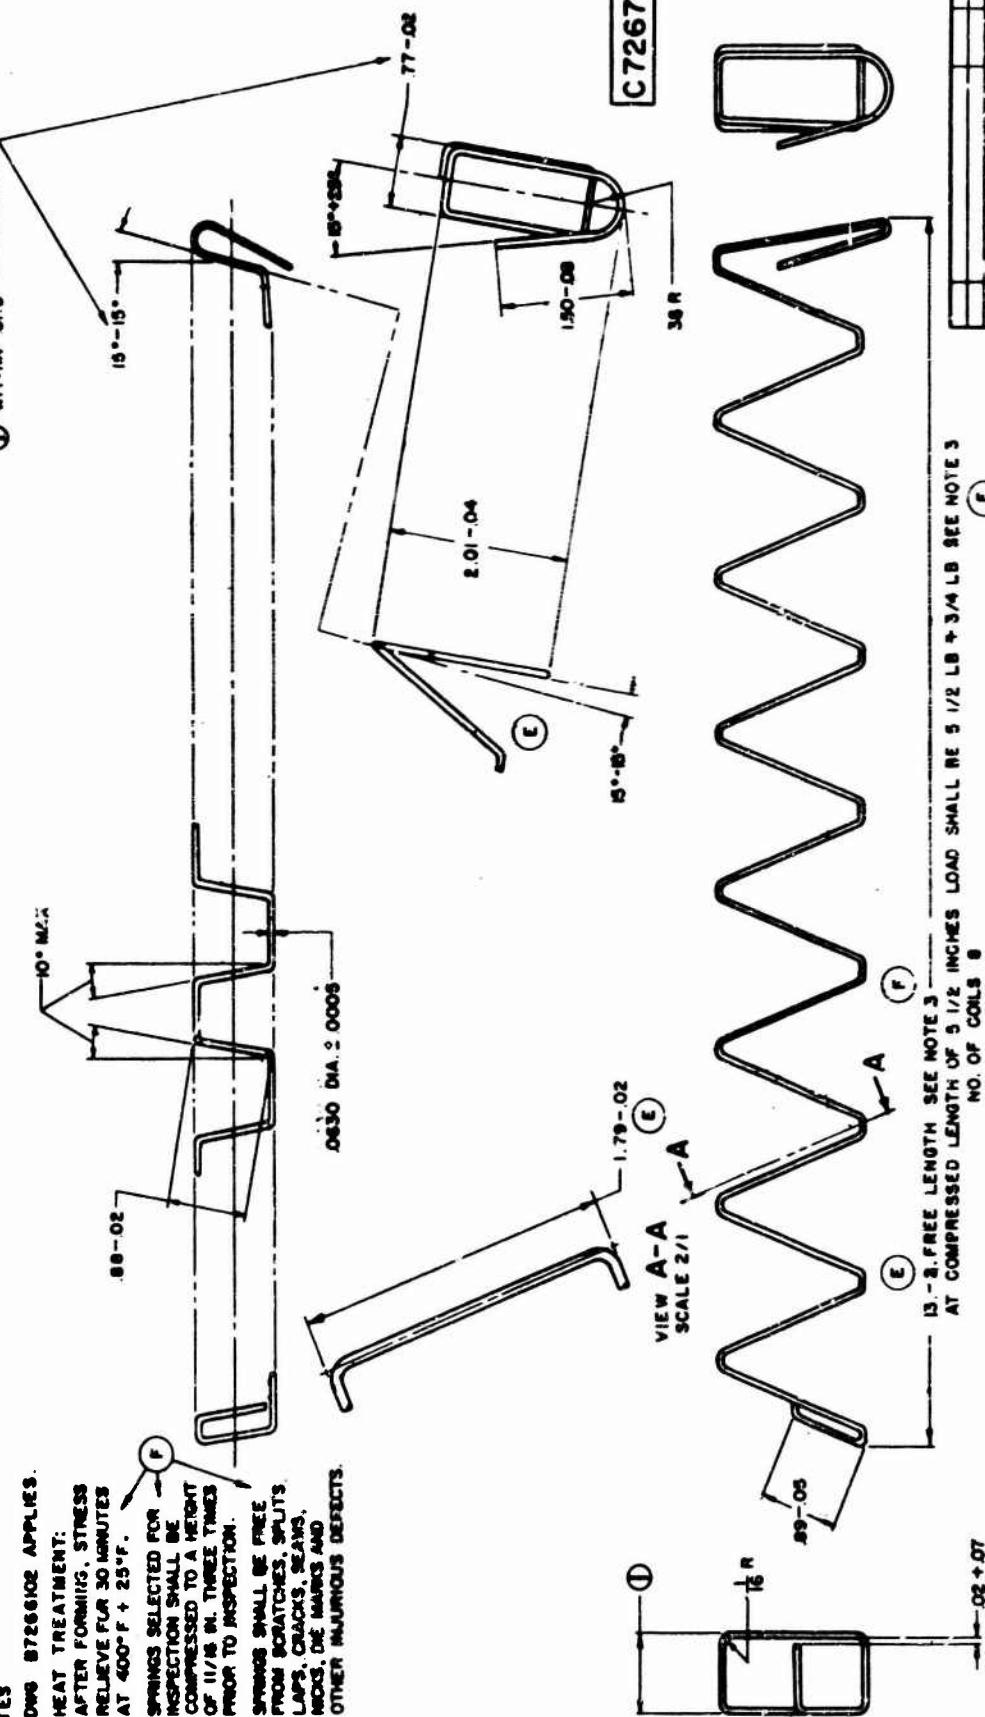


OMD PART NO. 7267078

SPRINGFIELD ARMORY ORDNANCE CORPS DEPT OF THE ARMY SPRINGFIELD, MASS.	
7267078	
1. DATE TO MANUFACTURE	10 OCT 1964
2. MANUFACTURER	SPRINGFIELD ARMORY
3. CONTRACT NUMBER	DA-100-10004-1
4. MATERIAL	STEEL SPEC MIL-W-19004 PBRMMA
5. QUANTITY	100
6. SPECIAL REQUIREMENTS	HEAT TREATMENT
7. SEE NOTE 1	SEE NOTE 1
8. APPROVAL	APPROVED
9. DO NOT	DO NOT
10. CARRY PART NO.	CARRY PART NO.

REVISIONS	
SIM	
P	
G	
REDRAWN AND REVISED - SEE CO. 5456519 PAGES 1 & 2	

- NOTES:
- SPRINGS SELECTED FOR INSPECTION SHALL BE CROSSED TO A HEIGHT OF 11/16 IN. THREE TIMES PRIOR TO INSPECTION.
 - SPRINGS SHALL BE FREE FROM SCRATCHES, SPLITS, LAPS, CRACKS, SEAMS, NICKS, DIE MARKS, AND OTHER INJURIOUS DEFECTS.

10° MAX.

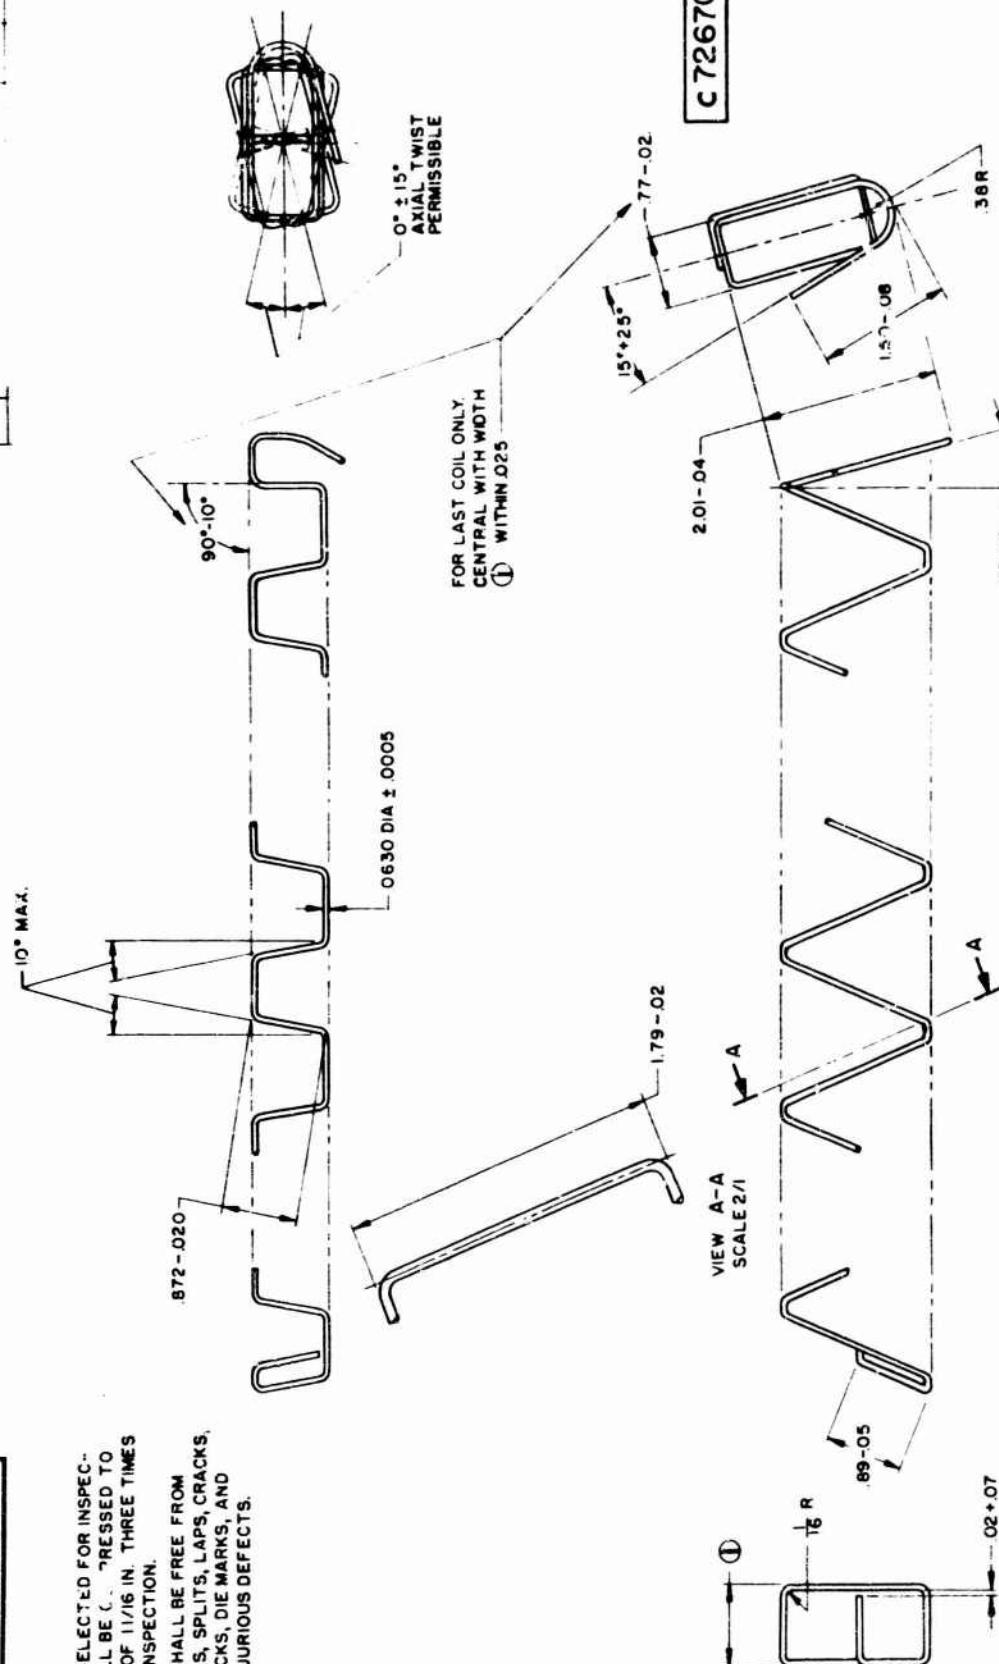

B

A

C 7267078

CODE IDENT NO. 0000
ORD PART NO. 7267078


PHYSICAL PROPERTIES		TOLERANCES ON DIMENSIONS & FEATURES		ORIGINAL DATE OF DRAWING	
IN	MM	IN	MM	IN	MM
.07790183	20.24	.0015	.038	10 OCT 54	10 OCT 54
RIFLE, M14		DETAILED IN	DETAILED IN	DRAWING	DRAWING
SEE ENGRG. RECORDS		INCHES	MM	INCHES	MM
MATERIAL	STEEL, SPEC MIL-W-13404 FS100A	STRESS RELIEVE	STRESS RELIEVE	STRESS RELIEVE	STRESS RELIEVE
HEAT TREATMENT	STRESS RELIEVE AT 400°F	STRESS RELIEVE	STRESS RELIEVE	STRESS RELIEVE	STRESS RELIEVE
STRESS RELIEVE 30 MIN AT 400°F		250°F	250°F	250°F	250°F
APPLICATION	DO NOT APPLY PART NO.	FINAL PROTECTIVE FINISH	NONE	APPROVED DRAWER	APPROVED DRAWER
IN	MM	IN	MM	IN	MM
3	76.2	.02 +.07	.02 +.07	1	25.4
3	76.2	.02 +.07	.02 +.07	1	25.4

SPRINGFIELD ARMY
ORDNANCE CORPS
DEPT. OF THE ARMY
SPRINGFIELD, MASS.
7267078

SPRING,
MAGAZINE

UNIT
C
WEIGHT
1
SCALE
1/1
UNIT WT
2

APPENDIX B

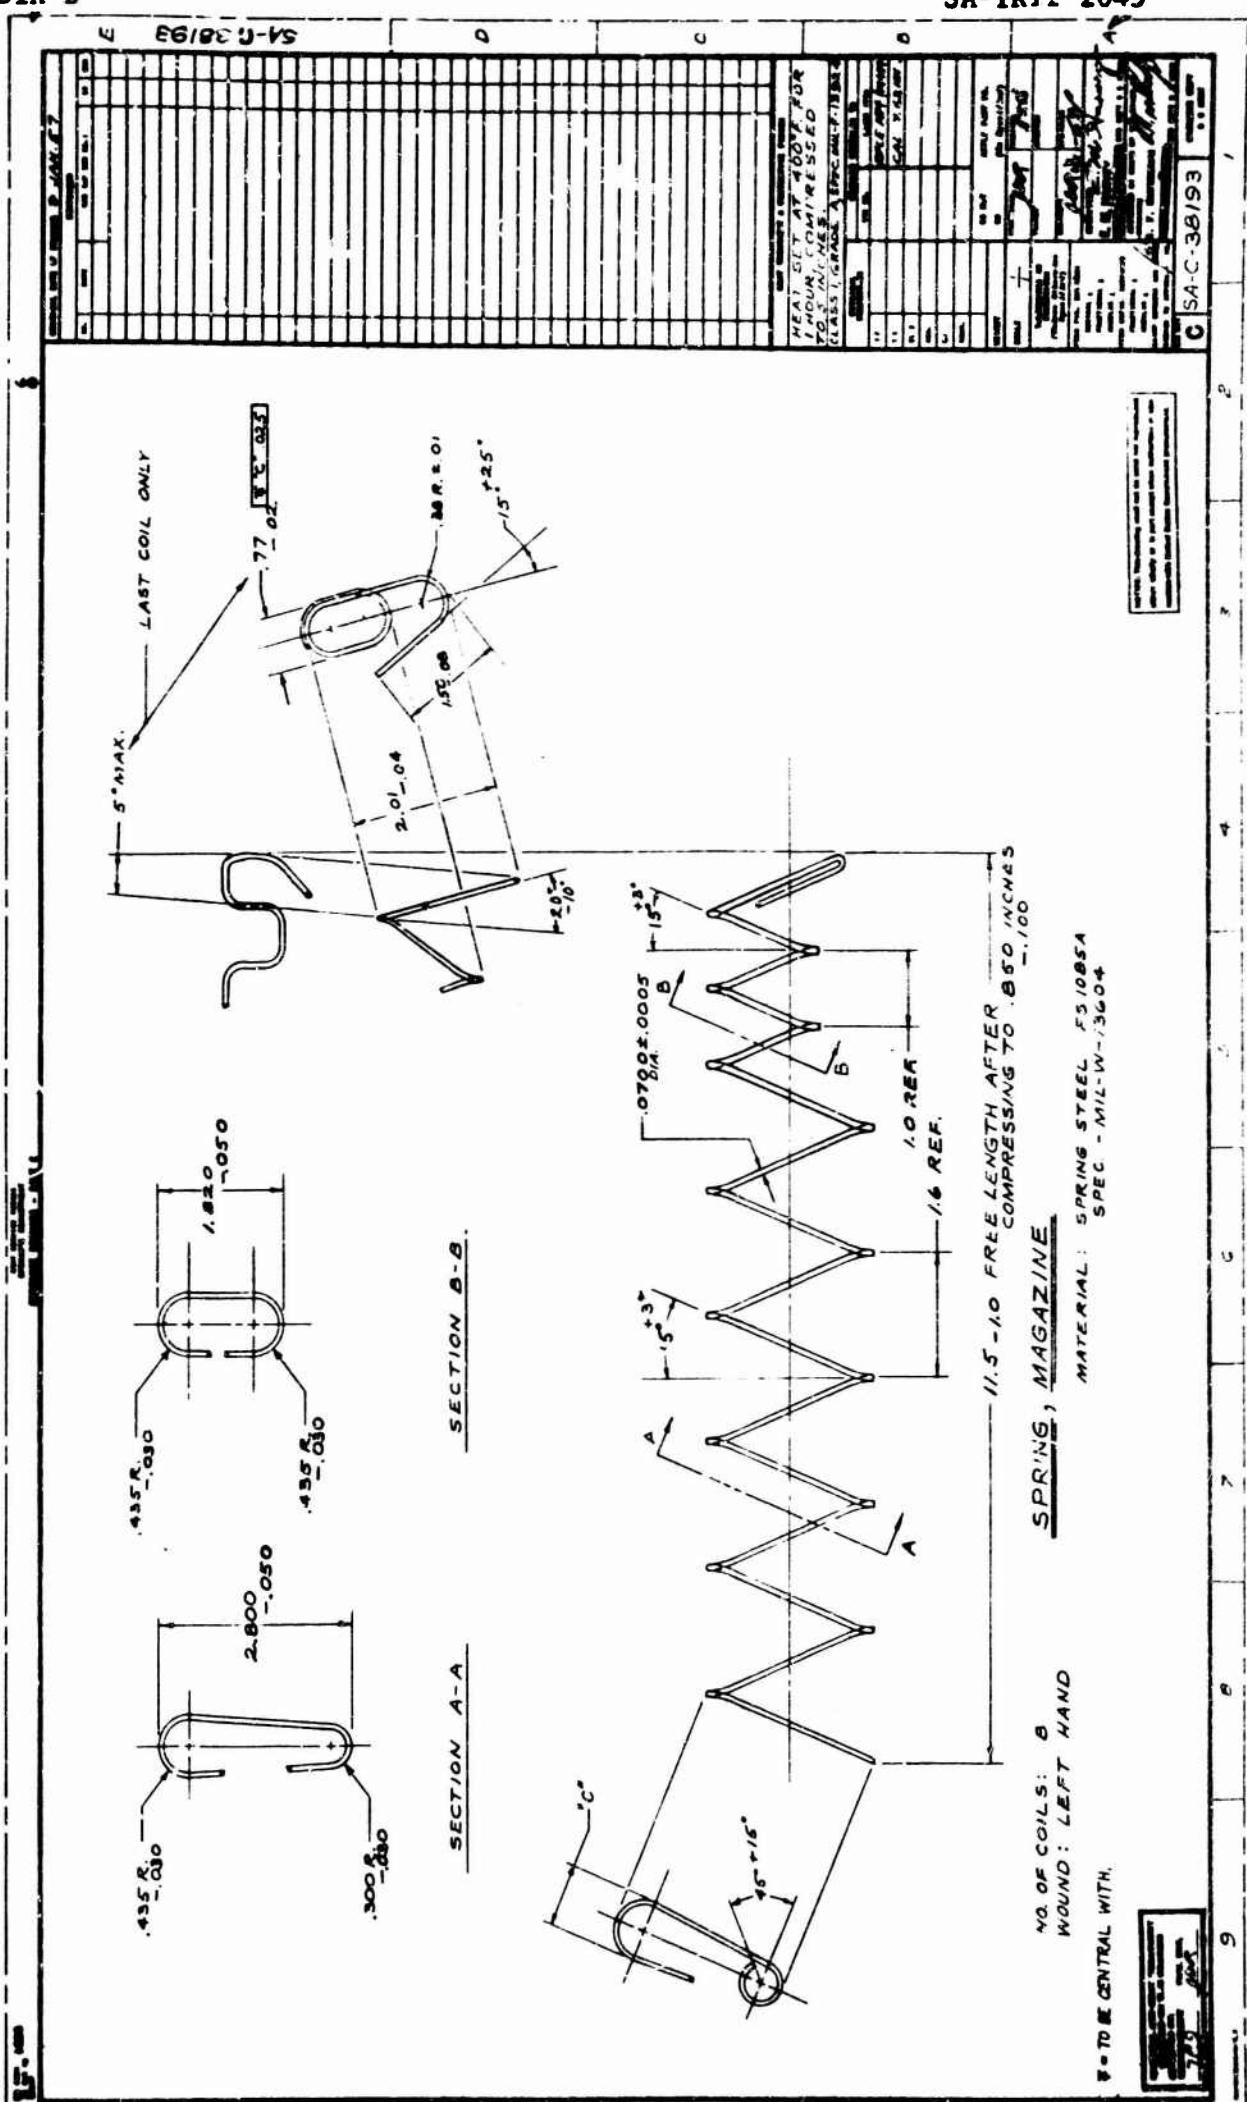
REPORT
SA-TR11-2643

ILLUSTRATIONS

<u>Photograph</u>	<u>Title Caption</u>
1. 19-058-1258/ORD-61	Magazine Springs: 1. Experimental, Nine-Coil 2. Standard, As-Wound 3. Experimental, Dual-Rate 4. Standard, Cold-Set
2. 19-058-15/ORD-60	Gymnasticating Test: Springs Stress-Relieved and Cold-Set by Contractor
3. 19-058-16/ORD-60	Gymnasticating Test: Springs Stress-Relieved at 400°F for 1/2 Hour and Heat-Set at 5 Inches for 1 Hour at 400°F
4. 19-058-202/ORD-60	Firing Test: Springs Stress-Relieved at 400°F for 1/2 Hour and Cold-Set to 11/16 Inch Three Times
5. 19-058-203/ORD-60	Firing Test: Springs Stress-Relieved at 400°F for 1/2 Hour and Heat-Set at 5 Inches for 1 Hour at 400°F
6. 19-058-1259/ORD-61	Adjustable Fixture with M14 Magazine Spring in Position
7. 19-058-1260/ORD-61	Load Check Setup for the M14 Magazine Spring

APPENDIX C

REPORT
SA-TR11-2643

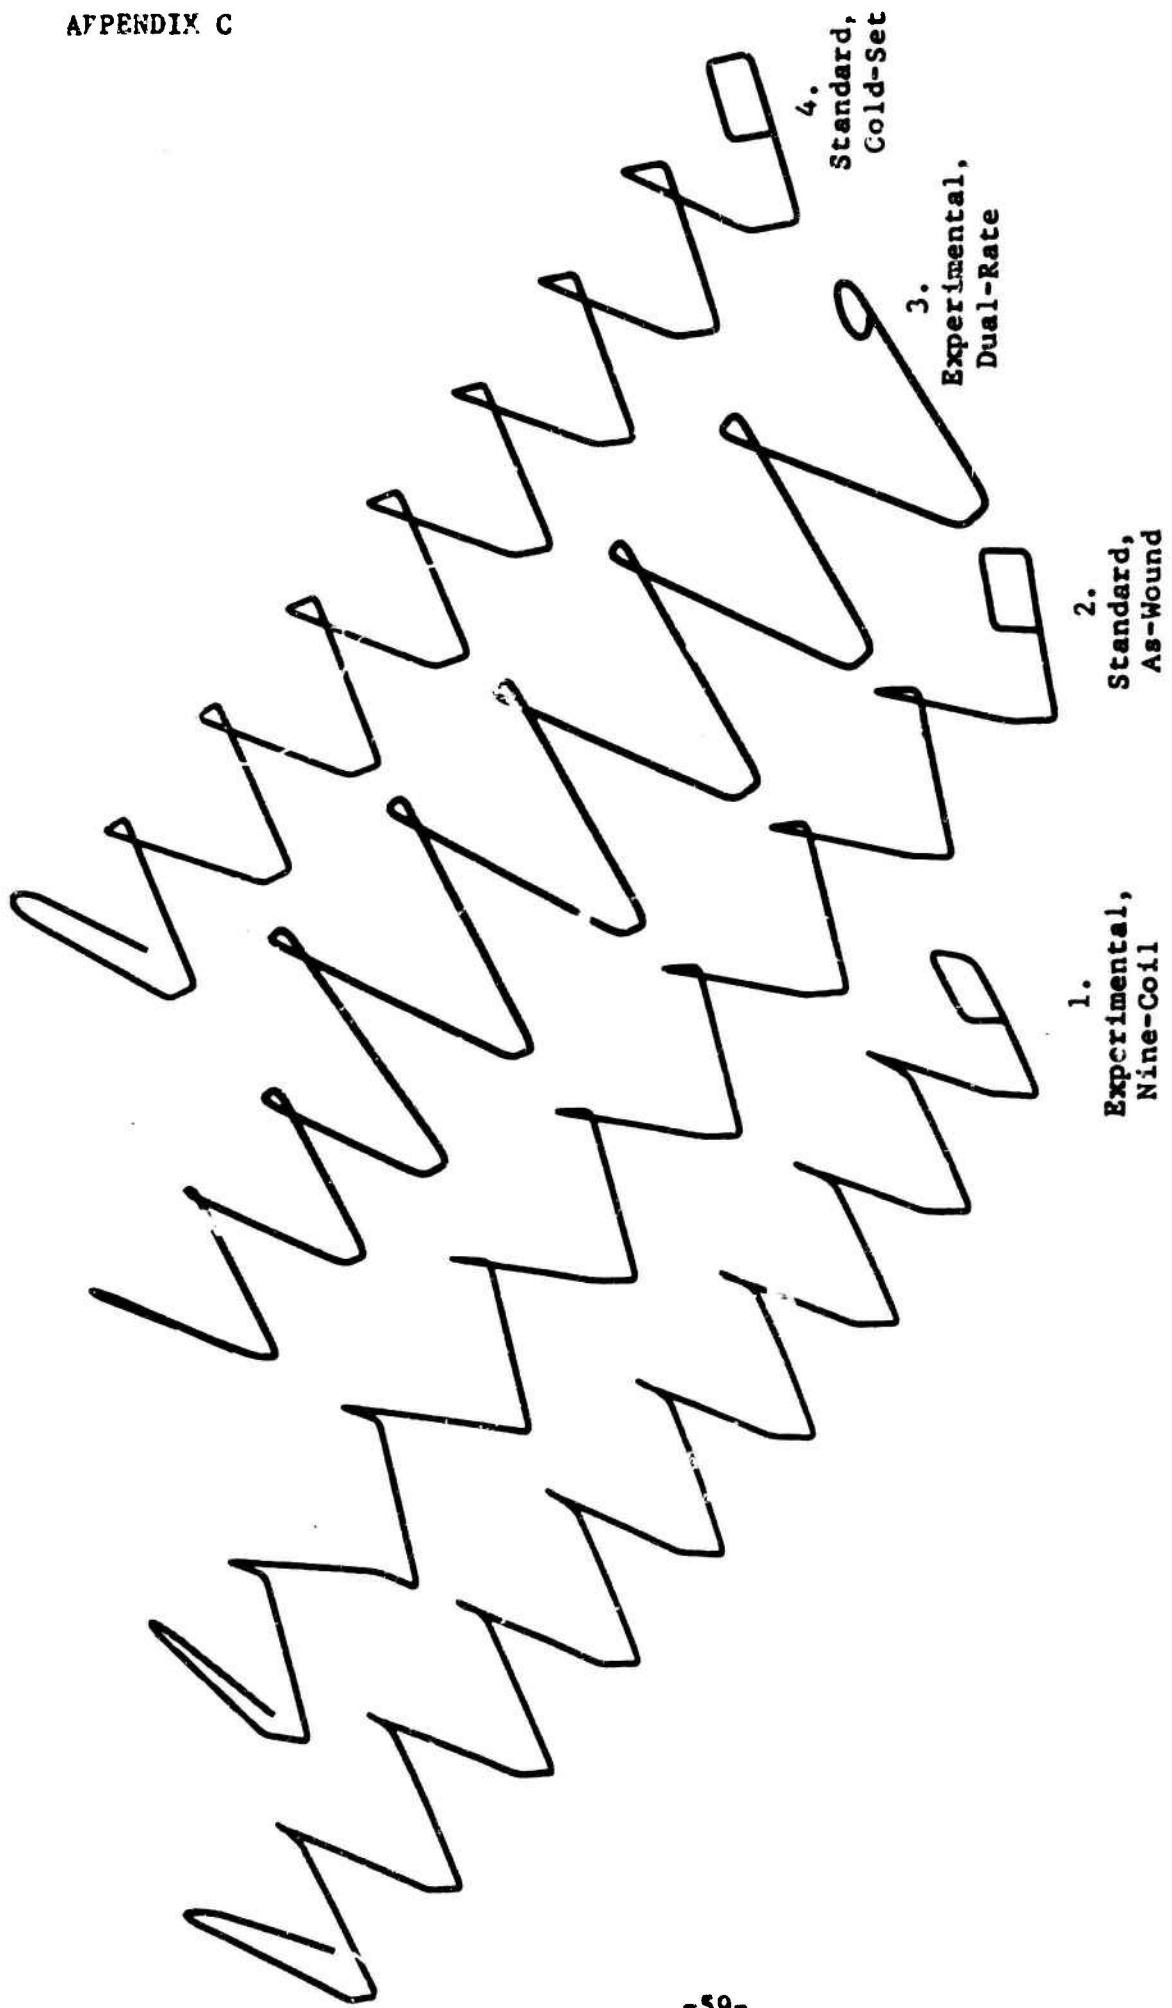


MAGAZINE SPRING FOR RIFLE, 7.62MM, M14

19-058-1258/ORD-61

REPORT
SA-TR11-2643

APPENDIX C

GYMNASTICATING TEST
SPRINGS STRESS-RELIEVED AND COLD-SET BY CONTRACTOR

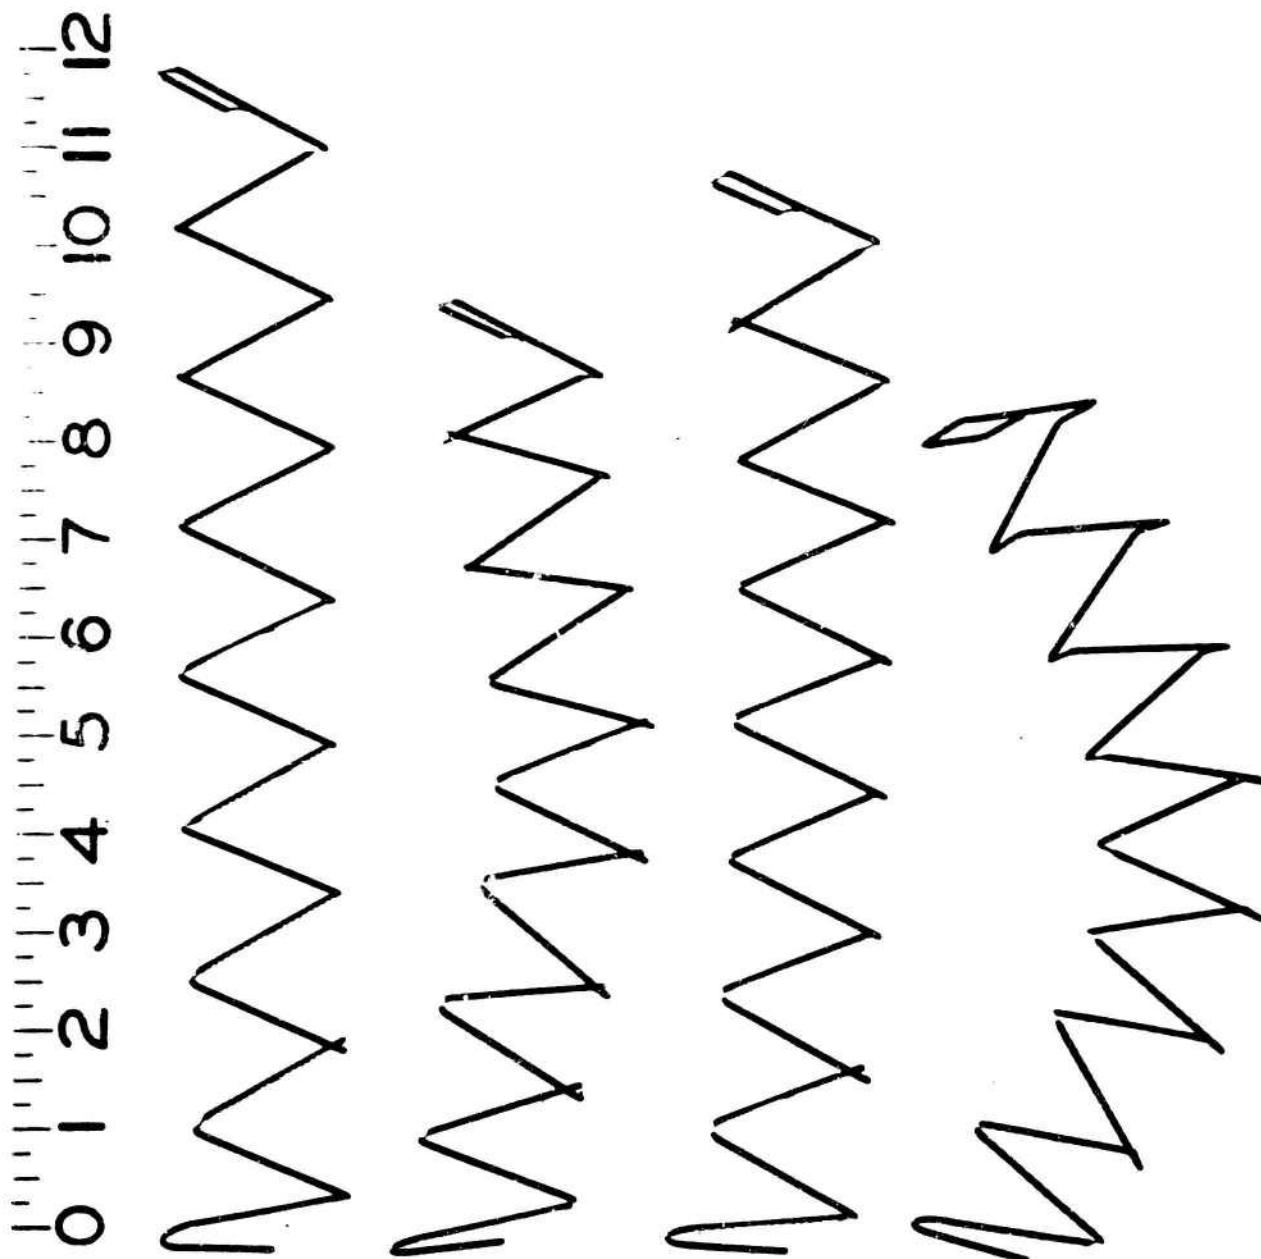

ORIGINAL

28

29

30

16,0000
Cycles

10,000
Cycles


12,000
Cycles

19-058-15/ORD-60

MAGAZINE SPRING FOR RIFLE, 7.62MM, M14

GYMNASTICATING TEST

SPRING STRESS-RELIEVED AT 400°F FOR 1/2 HOUR
AND HEAT-SET AT 5" FOR 1 HOUR AT 400°F

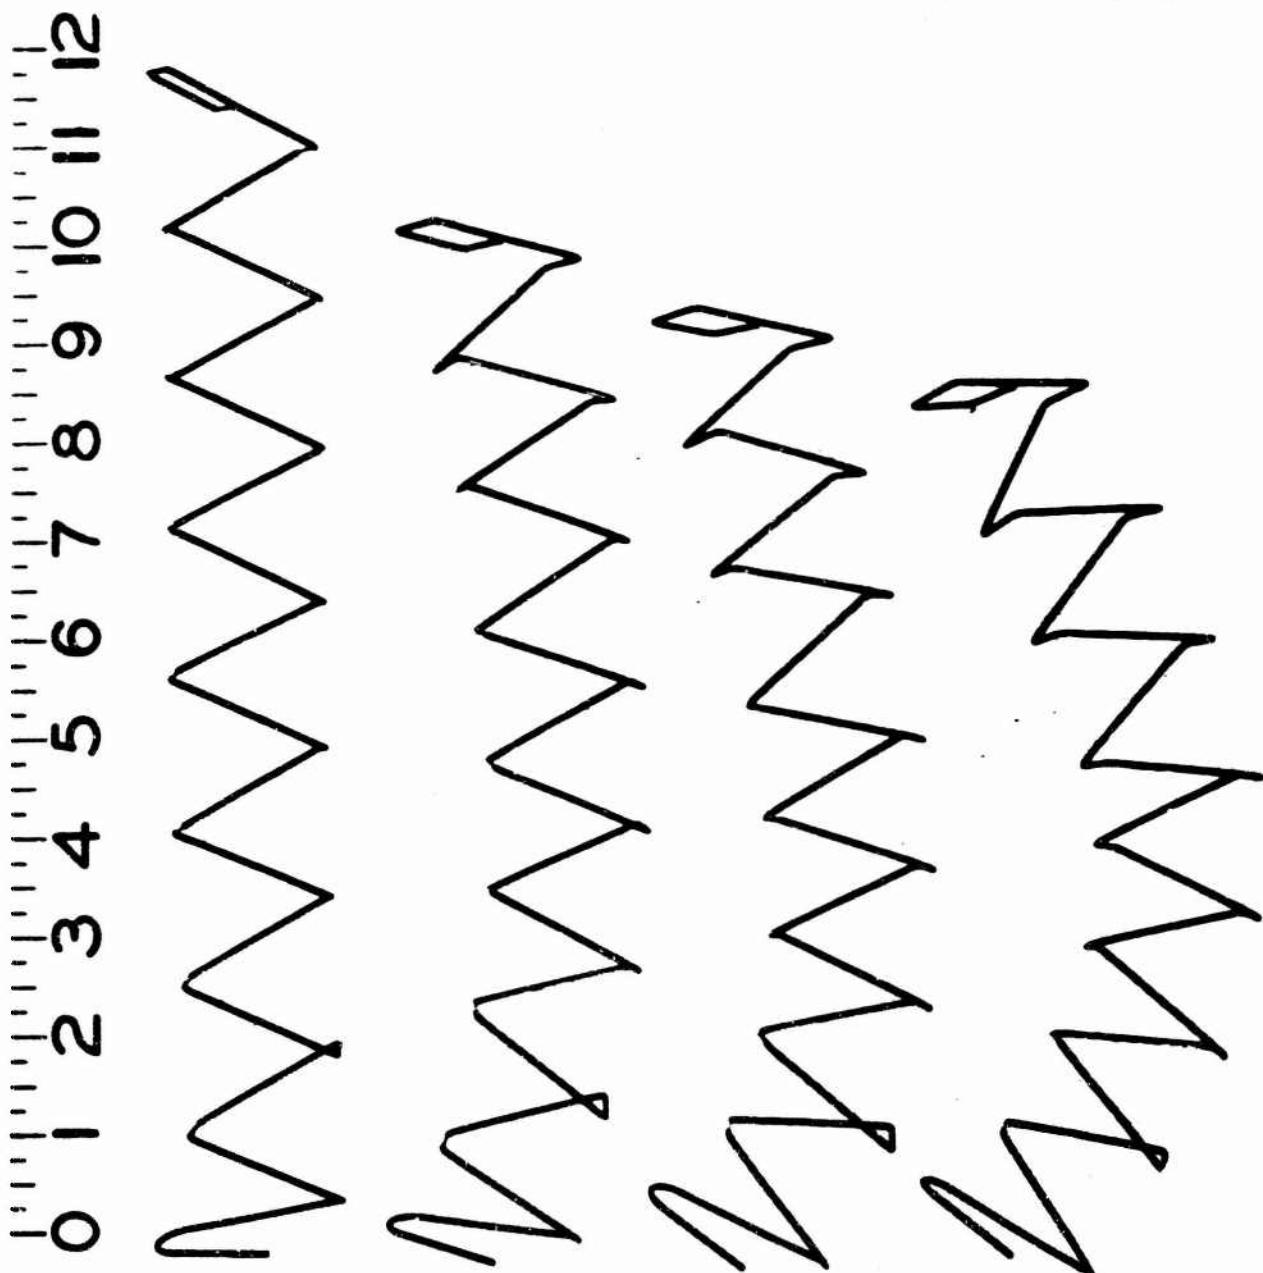

ORIGINAL

16171810,000
Cycles12,000
Cycles10,751
Cycles


19-058-16/ORD-60

MAGAZINE SPRING FOR RIFLE, 7.62MM, M14

REPORT
SA-TR11-2643

APPENDIX C

FIRING TEST
SPRINGS STRESS-RELIEVED AT 400°F FOR 1/2 HOUR
AND COLD-SET TO 11/16" THREE TIMES

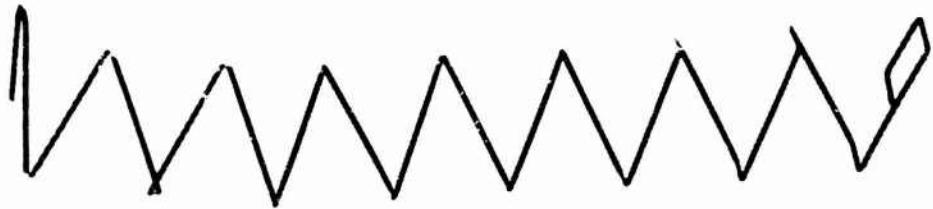

SPRING 9 - 2000 ROUNDS



SPRING 8 - 2000 ROUNDS



SPRING 7 - 2000 ROUNDS




ORIGINAL


10-058-202/ORD-60

MAGAZINE SPRING FOR RIFLE, 7.72MM, M14


FIRING TEST
SPRINGS STRESS-RELIEVED AT 400°F FOR 1/2 HOUR
AND HEAT-SET AT 5" FOR 1 HOUR AT 400°F

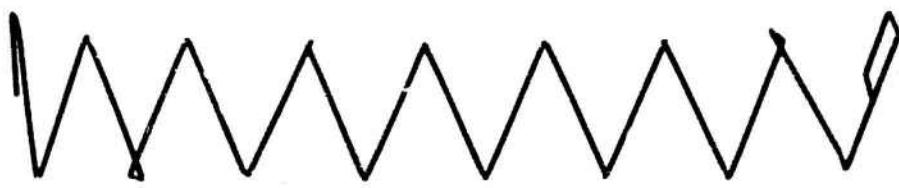


SPRING 15 - 2000 ROUNDS

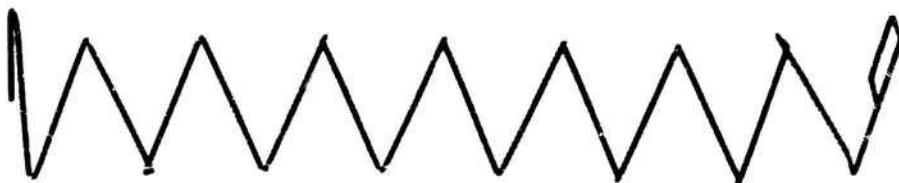

SPRING 14 - 2000 ROUNDS

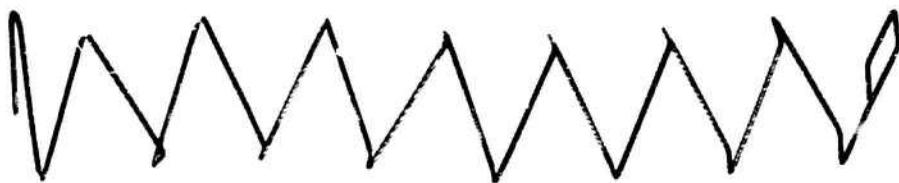

SPRING 13 - 2000 ROUNDS

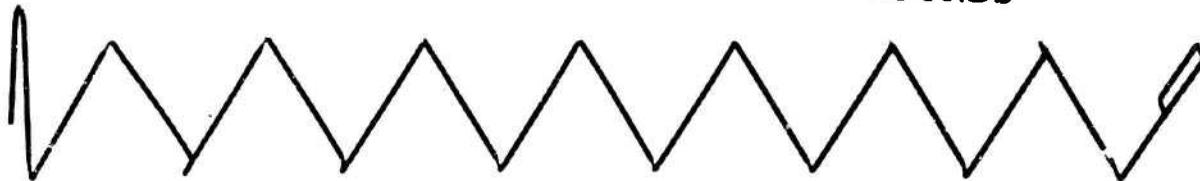

ORIGINAL



19-058-203/ORD-60

MAGAZINE SPRING FOR RIFLE, 7.62MM, M14

REPORT
SA-TK11-2643


APPENDIX C

19-058-1259/ORD-61

ADUSTABLE FIXTURE WITH M14 MAGAZINE SPRING IN POSITION

REPORT
SA-TR11-2643

APPENDIX C

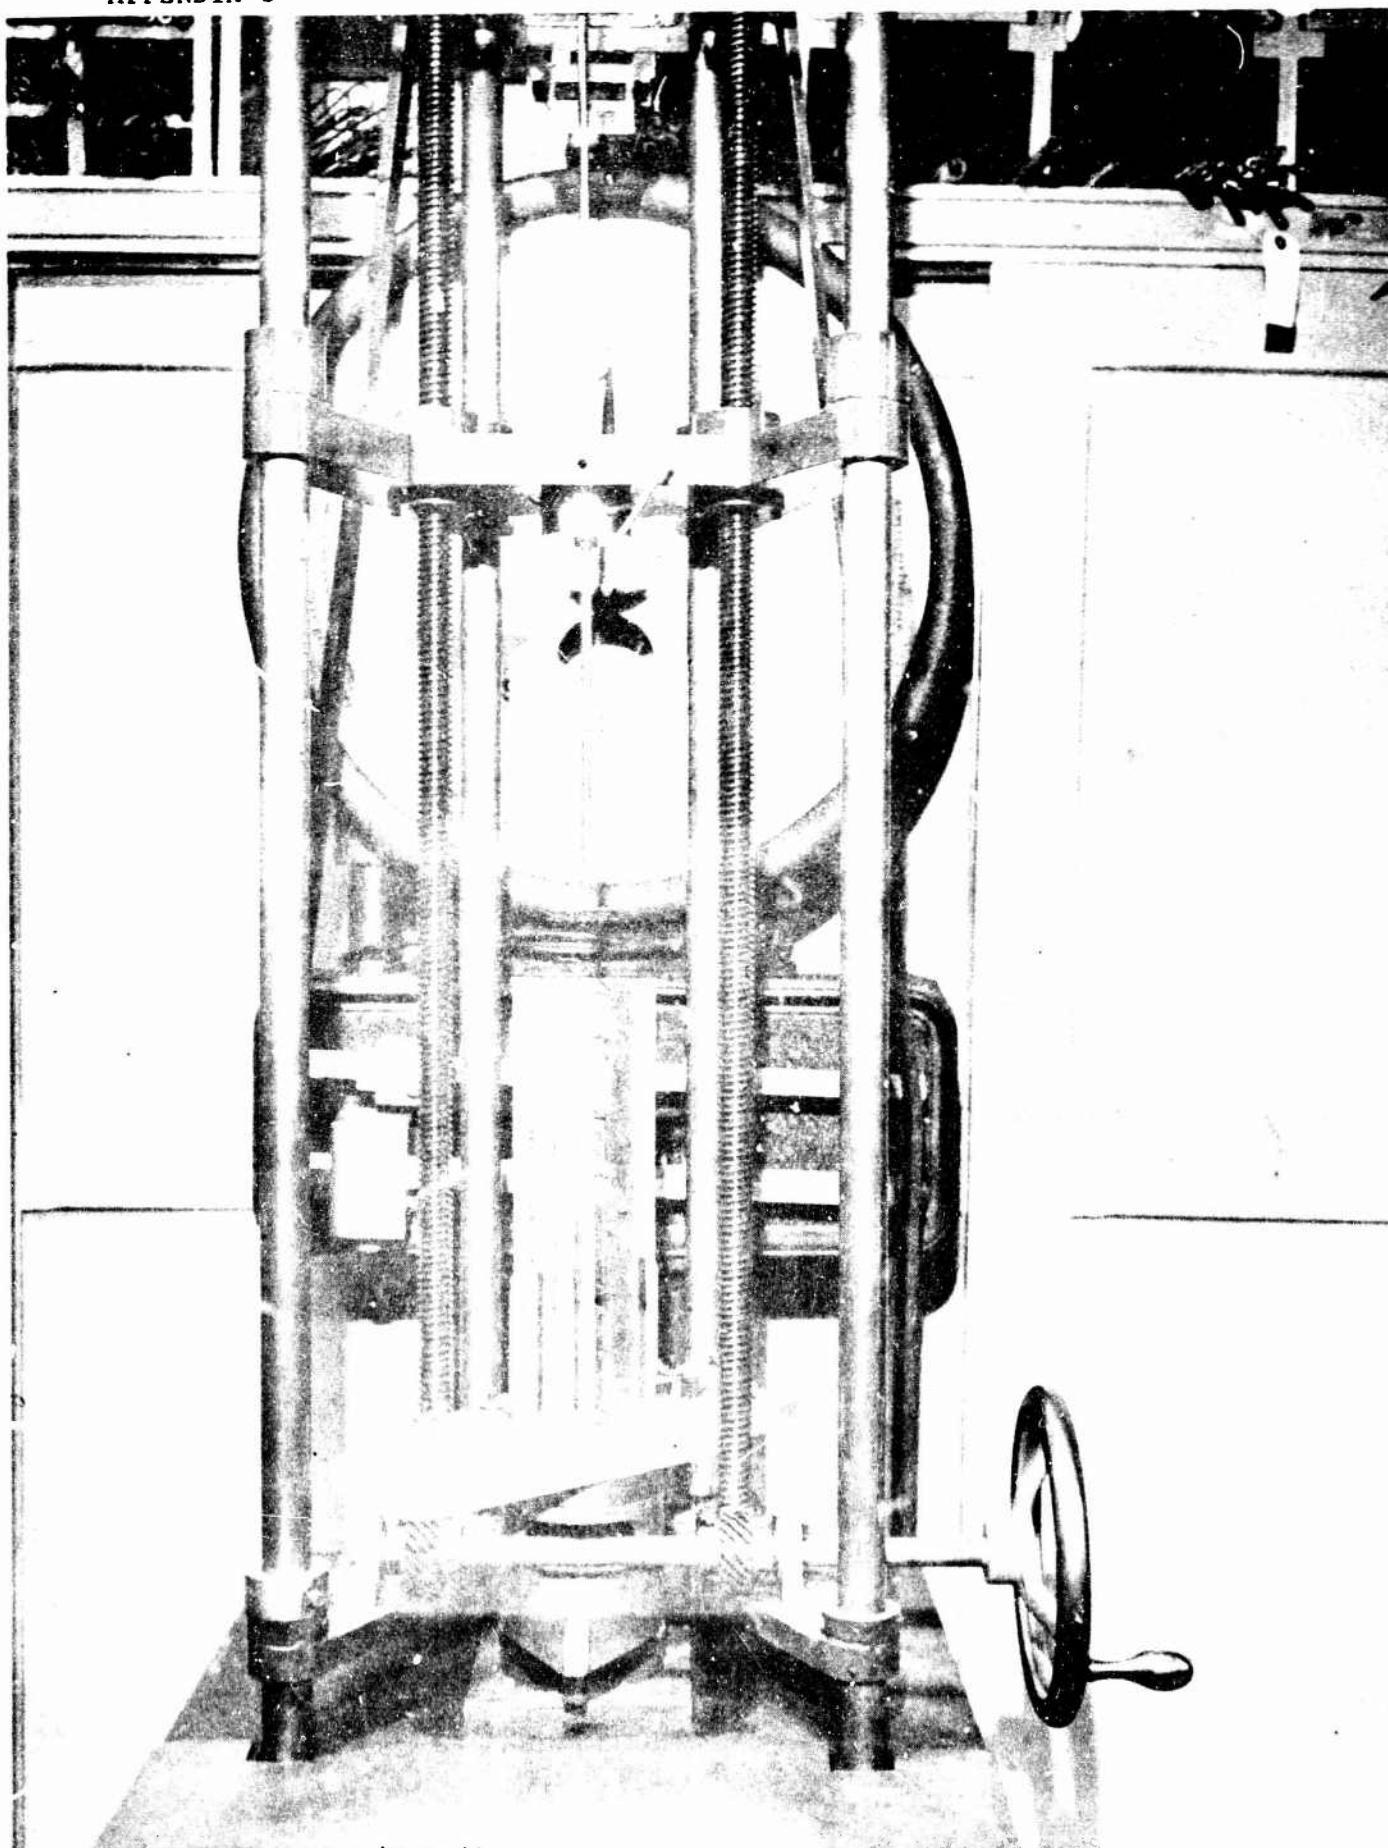

19-058-1260/ORD-61
LOAD CHECK SETUP FOR M14 MAGAZINE SPRING

REPORT
S4-TR11-2643

APPENDIX D

DISTRIBUTION

UNCLASSIFIED**Security Classification****DOCUMENT CONTROL DATA - R&D**

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author) Springfield Armory, Springfield, Massachusetts 01101	2a REPORT SECURITY CLASSIFICATION Unclassified
	2b GROUP N/A

3 REPORT TITLE

**EVALUATION OF PRETREATMENT PROCESSES AND LONG-TERM STORAGE ON
MAGAZINE SPRING FOR THE M14, 7.62MM, RIFLE**

4 DESCRIPTIVE NOTES (Type of report and inclusive dates)

Technical Report

5 AUTHOR(S) (Last name, first name, initial)

A. H. LaRiviere

6. REPORT DATE 1 February 1966	7a. TOTAL NO. OF PAGES 70	7b. NO. OF REFS None
8a. CONTRACT OR GRANT NO. N/A	9a. ORIGINATOR'S REPORT NUMBER(S) SA-TR11-2643	
b. PROJECT NO. M1-4-23002		
c. AMCOMS CODE 4930.25.6271.20.01	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) None	
d.		
10. AVAILABILITY/LIMITATION NOTICES Qualified requesters may obtain copies of this report from the Defense Documentation Center, Cameron Station, Alexandria, Virginia 22314. Other requesters may purchase copies of this report from the Clearinghouse, Department of Commerce, Springfield, Virginia 22151.		
11. SUPPLEMENTARY NOTES None	12. SPONSORING MILITARY ACTIVITY U.S. Army Material Command	

13. ABSTRACT

A study was made to evaluate the effects of various pretreatment processes and long-term storage on the magazine spring for the M14, 7.62mm, rifle. The various pretreatment processes considered in this study were: (1) stress-relieving only, (2) stress-relieving and cold-set, (3) stress-relieving and heat-set, and (4) heat-set only. The storage tests involved periods from 1 to 5 years and consisted of hot, cold, and normal temperature conditions. Test procedures are described and results discussed.

UNCLASSIFIED

Security Classification

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
<p>1. Pretreatment processes</p> <p>2. Long-term storage</p> <p>3. M14, 7.62mm, rifle</p> <p>4. Magazine spring - M14, 7.62mm, rifle</p> <p>5. Temperature conditions</p>						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.
- 8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:
- (1) "Qualified requesters may obtain copies of this report from DDC."
 - (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
 - (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through DDCBRS."
 - (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through DDCBRS."
 - (5) "All distribution of this report is controlled. Qualified DDC users shall request through DDCBRS."
- If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.
11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.
12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.
13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.
- It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).
- There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.
14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as identifiers for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

UNCLASSIFIED

Please note the following errata:

Final Report
Contract AF 19(628)-1689
AFCRL Report No. 65-829
Model Study of Explosion-Generated Seismic Waves
by Carl Kisslinger, Saint Louis University

Cover and title page:

Insert: Project No. 8652, Task No. 865208

ARPA Project Code No. should be: 3810

