

PHOTOGRAPH THIS SHEET

INVENTORY

LEVEL

AD-A995211

DTIC ACCESSION NUMBER

AFSWP-122, Interim Rpt. - Part II
Contract DA-49-129-ENG-119

DOCUMENT IDENTIFICATION

Oct. '51

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR	
NTIS	GRA&I
DTIC	TAB
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION / AVAILABILITY CODES	
DIST	AVAIL AND/OR SPECIAL
A/I	

Released



DTIC ELECTE
S JUL 5 1984 D
D

DATE ACCESSIONED

DISTRIBUTION STAMP

UNANNOUNCED

84 07 05 00 4

DATE RECEIVED IN DTIC

DATE RETURNED

REGISTERED OR CERTIFIED NO.

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDAC

2/1188

SRI-424 Interim R
(AFSNP-122-1) 26

UNCLASSIFIED

AFSNP-122

STANFORD RESEARCH INSTITUTE

STANFORD, CALIFORNIA

October 1951

Interim Report - Part II

THE TESTS - OPERATION JANGLE
Project 1(9)

by

E. B. Doll

Stanford Research Institute Project 424, WALRUS
Contract DA-49-129-Eng-119

Prepared for

Office of the Chief of Engineers
Washington D. C.

AD-A995211

This Document Contains Information Affecting the National


~~Defense and the National Security of the United States within the meaning of the Espionage Laws, Title 18, United States Code, Sections 793 and 794, and the Atomic Energy Act of 1954, Title 42, United States Code, Section 2014.~~

an Unauthorized Person is Prohibited by Law from

Classification (Cancelled) (Changed to
by Authority of Chf. Sec. Dir. Memo 10/28/57
by AT Date 2/25/59
Approved:

Statement A

Approved for public release;
Distribution unlimited



E. B. Doll, Chairman
Department of Applied Physics

Chf. Sec. Dir.
M.D. Loh
21 Jan 84



Ralph A. Krause
Director of Research

This Document Consists
of 12 Pages. No. 10
of 125 copies, Series A.

B 9572

UNCLASSIFIED

UNCLASSIFIED

70

DEPARTMENT OF THE ARMY
OFFICE OF THE CHIEF OF ENGINEERS
WASHINGTON

ENCEB

26 November 1951

SUBJECT: Interim Report on Project 1(9) - High Explosive Tests -
Operation JANGLE

TO: Director, Program One
Office of the Director Effects Tests
Technical Operations Squadron (Prov.)
P. O. Box 1349
Las Vegas, Nevada

1. Transmitted herewith Interim Report - Part II on Project 1(9) - High Explosive Tests - Operation JANGLE, dated October 1951, prepared by Stanford Research Institute under contract with the Office, Chief of Engineers. This document is classified SECRET.

2. The inclosed report contains an estimate of anticipated values of similar instrumentation for the "U" and "S" nuclear tests of Operation JANGLE. Issuance of this report has been expedited for the purpose of making such data available for planning purposes.

3. This report contains information affecting the national defense of the United States within the meaning of the Espionage Act, 50 U.S.C., 31 and 32, as amended. The transmission or the revelation of the contents in any manner to an unauthorized person is prohibited by law.

FOR THE CHIEF OF ENGINEERS:

H. B. JACKRISON
H. B. JACKRISON
Assistant Chief
Engineering Division
Military Construction

Distribution List Attached

UNCLASSIFIED

~~SECRET~~

DISTRIBUTION LIST (Continued)

Interim Report
Part II
(SECRET)

~~SECRET~~ UNCLASSIFIED

Copy No.

- 1 thru 6 Mr. T. O. Stark, Office of the Chief of Engineers,
Code Number ENGE8, Washington 25, D. C.
- 7 & 8 Mr. J. W. Smith, Office of Naval Research,
Washington 25, D. C.
- 9 & 10 Dr. Edward N. Minor, Ballistic Research Laboratories,
Aberdeen Proving Ground, Maryland
- 11 & 12 The Chief, Armed Forces Special Weapons Project, Box 2610,
Washington 25, D. C. ATTN: Colonel G. F. Blunda
- 13 thru 20 Colonel Max George, Director, Effects Tests, c/o Technical
Operations Squadron (Prov.) P.O. Box 1349, Las Vegas, Nevada
- 21 & 22 Dr. W. E. Morris, Naval Ordnance Laboratory, White Oak,
Maryland
- 23 Professor C. B. Morrey, University of California,
Berkeley, California
- 24 Dr. Paul L. Chambre, University of California,
Berkeley, California
- 25 Dr. Wilkes, Office of Naval Research, 1000 Geary Street,
San Francisco 9, California
- 26, 27 & 28 Dr. A. F. Spilhaus, Office of the Director Effects Tests,
c/o Technical Operations Squadron (Prov.) Kirtland Air
Force Base, Albuquerque, New Mexico
- 29, 30 & 31 Director, Program One, Office of the Director Effects
Tests, c/o Technical Operations Squadron (Prov.)
P. O. Box 1349, Las Vegas, Nevada
- 32, 33 & 34 Director, Program Three, Office of the Director Effects
Tests, c/o Technical Operations Squadron (Prov.) P.O. Box 1349,
Las Vegas, Nevada
- 35 CIRELE William F. Gannon, USN, Development Div., Hq., Field
Command, AFSWP, Sandia Base, Albuquerque, New Mexico

~~SECRET~~ UNCLASSIFIEDDISTRIBUTION LIST (Continued)Interim Report
Part II
(SECRET)~~SECRET~~ UNCLASSIFIEDCopy No.

- 36 Mr. William F. Howard, Division 1112, Sandia Corporation,
Sandia Base, Albuquerque, New Mexico
- 37 Mr. George W. Cook, David Taylor Model Bas'n,
Washington 7, D. C.
- 38 Armour Research Foundation, Illinois Institute of Technology,
Technology Center, Chicago 16, Illinois.
ATTN: Mr. Steve Dokas
- 39 Dr. Robert J. Hansen, Department of Civil & Sanitary
Engineering, Massachusetts Institute of Technology,
Cambridge 39, Massachusetts
- 40 Dr. D. T. Griggs, University of California at Los Angeles,
190 Granville Avenue, Los Angeles, California
- 41 Dr. J. J. Gilvarry, Rand Corporation, Santa Monica, Calif.
- 42 Dr. C. W. Lampson, Ballistics Research Laboratory,
Aberdeen Proving Ground, Maryland
- 43 Professor N. M. Newmark, 708 N. Michigan Avenue,
Urbana, Illinois
- 44 Professor Lydik S. Jacobsen, Mechanical Engineering,
Stanford University, Stanford, California
- 45 Dr. Edward Zadina, Los Alamos Scientific Laboratory,
Los Alamos, New Mexico
- 46 Professor Perry Byerly, University of California,
Berkeley, California

~~SECRET~~ UNCLASSIFIED

~~SECRET~~

UNCLASSIFIED

DISTRIBUTION LIST

Interim Report
Part II

~~(SECRET)~~ UNCLASSIFIED

Copy No.

- | | |
|---------|---|
| 47 | Assistant Chief of Staff, G-4, GS USA, Washington 25, D. C.
ATTN: Col. A. W. Betts |
| 48 | The Assistant for Civil Defense Liaison, Office of the
Secretary of Defense, Washington 25, D. C. |
| 49 | Chief of Ordnance, Department of the Army, Washington 25,
D. C. ATTN: Technical Reference Unit (ORD TX AR)
Room 1B473, The Pentagon |
| 50 & 51 | Operations Research Office, Department of the Army,
Ft. Leslie J. McNair, Washington 25, D. C.
ATTN: Mr. Howard Brackney |
| 52 | The Commanding Officer, Engineer Research and Development
Laboratories, Fort Belvoir, Virginia. ATTN: Capt. Stuart |
| 53 | Office of the Chief of Engineers, Assistant Chief of
Engineers for Military Operations, Engineer Research and
Development Division |
| 54 | Office of the Chief of Engineers, Assistant Chief of
Engineers for Civil Works, ATTN: Chief of Engineering
Division |
| 55 | Engineer Strategic Intelligence Division, Army Map Service,
8500 Brooks Lane, Washington, D. C. |
| 56 | Office of Naval Research, Geophysics Branch, Washington 25,
D. C. ATTN: Mr. Gordon G. Lill, Room 2516, Building T-3 |
| 57 | Naval Research Laboratory, Mechanics Division, Washington 25,
D. C. ATTN: Mr. J. P. Walsh |
| 58 | Officer-in-Charge, Naval Civil Engineering Research and
Evaluation Laboratory, Naval Station, Port Hueneme, Calif. |
| 59 | Commanding Officer, U. S. Naval Radiological Defense
Laboratory, San Francisco 24, California |
| 60 | Director of Intelligence, Headquarters, U. S. Air Force,
Washington 25, D. C. ATTN: Air Targets Division, Physical
Vulnerability Branch, Mr. R. G. Grassy |

~~SECRET~~

UNCLASSIFIED

DISTRIBUTION LIST (Continued)

Interim Report
Part II

~~(SECRET)~~ UNCLASSIFIED

Copy No.

- 61 The Director, Central Air Documents Office, U. S. Building, Dayton 2, Ohio. ATTN: CADO-D1
- 62 Air University Library, Maxwell Field, Alabama
- 63 Commanding General, Air Research and Development Command, 9-11 W. Baltimore Street, Baltimore, Maryland
- 64 Air Force Cambridge Research Laboratory, 230 Albany Street, Cambridge, Massachusetts. ATTN: ERHS-1, Geophysical Research Library
- 65 thru 74 The Chief, Armed Forces Special Weapons Project, P.O. Box 2610, Washington, D. C.
- 75 & 76 U. S. Atomic Energy Commission, Division of Military Application, 1901 Constitution Avenue, N. W., Washington, D. C. ATTN: Inez C. O'Brien, Room 159
- 77 Committee on Geophysics and Geography, Research and Development Board, Department of Defense, Washington 25, D. C. ATTN: Dr. Roger A. Prior
- 78 Chairman, Armed Services Explosive Safety Board, Room 2413, Temporary U Building, 12th & Constitution Avenue, N. W. Washington, D. C.
- 79 Director, Waterways Experiment Station, Box 631, Vicksburg, Mississippi
- 80 Engineering and Construction Director, The Panama Canal, Balboa Heights, Canal Zone
- 81 Dr. Leonard Obert, Eastern Experiment Station, U. S. Bureau of Mines, College Park, Maryland
- 82 Professor John B. Wilbur, Department of Civil & Sanitary Engineering, Massachusetts Institute of Technology, Cambridge 39, Massachusetts
- 83 Professor C. H. Norris, Department of Civil & Sanitary Engineering, Massachusetts Institute of Technology, Cambridge 39, Massachusetts
- 84 Professor H. L. Bowman, Drexel Institute, Philadelphia, Pennsylvania

~~SECRET~~ UNCLASSIFIED

DISTRIBUTION LIST (Continued)

Interim Report
Part II~~(SECRET)~~ UNCLASSIFIEDCopy No.

- 85 Breckhaven National Laboratory, Upton, Long Island, New York.
ATTN: Dr. J. B. Horner Kuper, Project 13a
- 86 Cambridge Research Center, 230 Albany Street, Cambridge 39,
Massachusetts. ATTN: Major James C. Vann, USAF,
Project 1.3c, Air Force
- 87 Chief, Bureau of Yards & Docks, Department of the Navy,
Washington 25, D. C. ATTN: Lt. C. B. Hazzard, USN,
Code P-312 (Project Officer - Program 3 Structures - Navy)
- 88 Commanding Officer, Headquarters, Air Materiel Command,
P. O. Box 564, Area A, Wright-Patterson Air Force Base,
Dayton, Ohio. ATTN: Capt. F. E. LeBourveau, USAF
(Project Officer - Program 3 Structures - Air Force)
- 89 Director, Program Four, Projects 1.5a, 1.5a(9), Office of
the Director Effects Tests, c/o Technical Operations Squadron
(Prov.), P. O. Box 1349, Las Vegas, Nevada. ATTN: Commander
E. J. Hoffman, USN
- 90 Director, Office of the Director Effects Tests,
c/o Technical Operations Squadron (Prov.) P. O. Box 1349,
Las Vegas, Nevada. ATTN: Mr. H. J. Sundstrom
(Project 1.6 and 1.7)
- 91 Commanding Officer, Naval Ordnance Laboratory, White Oak,
Silver Spring 19, Maryland. ATTN: Dr. G. K. Hartman
- 92 Chief, Armed Forces Special Weapons Project, The Pentagon,
Washington 25, D. C. ATTN: Dr. Herbert Scoville, Jr.
- 93 Director, Nevada Test Site Engineering Office,
111 North 9th Street, P. O. Box 1609, Las Vegas, Nevada.
ATTN: Commander L. N. Saunders, USN
- 94 Director, Office of the Director Effects Tests,
c/o Technical Operations Squadron (Prov.) P. O. Box 1349,
Las Vegas, Nevada. ATTN: Capt. R. W. McBride, CE, USA

~~SECRET~~ UNCLASSIFIED

DISTRIBUTION LIST (Continued)

Interim Report
Part II
(SECRET)

~~SECRET~~ UNCLASSIFIED

Copy No.

- 95 Director, Office of the Director Effects Tests,
c/o Technical Operations Squadron (Prov.) P. O. Box 1349,
Las Vegas, Nevada. ATTN: Capt. H. A. Stone, USAF
- 96 Chief, Armed Forces Special Weapons Project, The Pentagon,
Washington 25, D. C. ATTN: Capt. R. A. Hinners, USN,
Weapons Defense Division
- 97 Director of Intelligence, U. S. Air Force, Washington 25, D. C.
ATTN: Sargent White, Chief, Physical Vulnerability Branch,
Air Targets Division
- 98 Director, Office of the Director Effects Tests,
c/o Technical Operations Squadron (Prov.) P. O. Box 1349,
Las Vegas, Nevada. ATTN: Historian
- 99 Chief, Bureau of Ships, Department of the Navy,
Washington 25, D. C. ATTN: Lt. Rogert Preston, USN,
Code 348
- 100 Chief, Armed Forces Special Weapons Project, P. O. Box 2610,
Washington 25, D. C. ATTN: Technical Library Branch
- 103 Chief, Bureau of Yards & Docks, Department of the Navy,
Washington 25, D. C. ATTN: Lt. Comdr. Stanley Rockefeller

October 18, 1951

STANFORD RESEARCH INSTITUTE

Interim Report - Part II

HE TESTS -- OPERATION JANGLE

I Introduction

The purpose of this report is to utilize the results of the HE Tests of Operation JANGLE (Project 1(9)) to estimate the anticipated similar results for the "U" and "S" one kiloton nuclear tests of Operation JANGLE.

The HE Tests of Operation JANGLE are reported in a Stanford Research Institute Interim Report of October 1951, classified CONFIDENTIAL. For reference purposes the CONFIDENTIAL Interim Report will be referred to as Part I, and it is assumed that the interested reader has it available.

In this report (Part II) no attempt is made to differentiate between the fundamental characteristics of HE (TNT) and nuclear explosions. In fact, the discussion herein assumes that a 1 KT nuclear explosion will release mechanical energy equivalent to 1 KT of TNT and will produce physical effects equivalent to those which would be produced by 1 KT of TNT. It would be more proper to state that this report utilizes the results of 2560 pound and 40,000 pound TNT explosions to estimate similar results for scaled experiments using 1,000 tons of TNT.

II Description of Tests

The tests under consideration may be described as follows:

<u>Test</u>	<u>Pounds of TNT</u>		<u>Depth of Charge</u>		<u>Date</u>
	<u>W</u>	<u>W^{1/3}</u>	<u>ft</u>	<u>λ_c</u>	
HE-1	2.56 x 10 ³	13.8	1.9	0.135	August 25, 1951
HE-2	40 x 10 ³	34.2	4.7	0.135	September 3, 1951
HE-4	2.56 x 10 ³	13.8	-1.9	-0.135	September 9, 1951
U	2000 x 10 ³	126	17	0.135	Future
S	2000 x 10 ³	126	Surface		Future

HE-1, HE-2 and U are scaled experiments and HE-4 and S are scaled experiments. The scale ratios are as follows:

<u>Tests</u>	<u>Scale Ratio</u>
U : HE-2	3.68
U : HE-1	9.2
HE-2 : HE-2	2.5
S : HE-4	9.2

For the application of model laws to scaled experiments it is assumed that the environment of the experiment (the air and earth) is either homogeneous or is described by dimensions related by the appropriate scale factor. In this case it is assumed that the air and earth are both homogeneous to the dimensions required for each experiment. In the case of the air this is a valid assumption. For the earth this may not be the case. It is known that the sub-surface characteristics have local variations throughout the test area (see Part I). It is also believed that there is a rather marked change in seismic velocity at a depth of 100 - 200 feet, which is shallow enough to affect 1 KT tests while possibly not producing pronounced effects on the smaller tests. In any event, a homogeneous earth has been assumed for the application of the normal model laws, with the test site and gage line of HE-2 used as the reference.

III Earth Acceleration

Examination of the earth acceleration records (Part I - Appendix) shows pronounced secondary effects which can be ascribed to the air-blast pressure pushing on the ground surface above the ground location. These induced air-blast effects were generally of short duration compared to the remainder of the accelerometer records. In particular, it would appear that for charges in excess of a few thousand pounds the duration of these effects is dependent on the characteristics of the earth rather than on the charge size. As a consequence, for large charges these locally induced effects are probably not of major military importance. For HE-1 and HE-2 the amplitudes of these short duration air-blast induced effects did not scale, while the remainder of the phenomena did scale.

For the purposes of this discussion the locally induced air-blast effects have been removed from the acceleration records, and consideration is given only to the relatively low frequency acceleration components produced by the fundamental explosive forces operating through the earth alone. The importance of the induced air-blast effects in the design of instrumentation is recognized, and further discussion of these phenomena will be given later.

Figure 1 shows the wave-forms estimated for the earth acceleration on the U test, neglecting the air-blast induced effects. These curves have been prepared by the application of the normal model law to the results of HE-1 and HE-2. The horizontal records for HE-1 and HE-2 were quite consistent and a single representative wave form appears appropriate. There were some relatively strong later arrival accelerations, but these phenomena appeared not to follow any systematic pattern regarding either wave-form or amplitude.


The curves of Figures 2 and 3 show the expected peak amplitudes of the horizontal earth acceleration as functions of λ and R for Test U. For Test S these peak accelerations should be reduced by about 25 per cent, although the wave-form of Figure 1 should still apply. Estimates for Test S are based on HE-4, where the air-blast induced effects were not excessive on the horizontal earth acceleration.

The vertical earth acceleration records are more complex than the horizontal, as shown in Figure 1. Furthermore, the local air-blast effects are more pronounced on the vertical records, and the true low frequency character is difficult to ascertain. It appears that for small values of λ the initial positive vertical peak is the maximum peak, while for larger λ values the first negative peak and the second positive peak are nearly equal and considerably greater than the first positive peak. For low λ values the low frequency peak vertical acceleration is estimated to be about one-fifth the peak horizontal acceleration shown in Figures 2 and 3. Direct scaling applied to HE-2 would show a flattening of the vertical acceleration graph in the region λ 10 to λ 12, with the peak vertical accelerations becoming equal to the horizontal accelerations in this region and exceeding them at larger distances.

However, a study of the HE-1 and HE-2 results shows this flattening of the vertical acceleration versus distance curve to occur at a distance of about 500 feet for each test, indicating that this effect does not scale. If this effect truly occurs at 500 feet this corresponds to a λ value of about four for a 1 KT test. This leads to the distinct possibility that the vertical component can exceed the horizontal component at distances beyond about λ 5 or λ 6 for a 1 KT test. It appears that there is either insufficient data or insufficient analysis, or both, to estimate the vertical earth acceleration for 1 KT tests at this time. It is generally believed that the horizontal component of acceleration is of major importance in producing military damage, and this component can be estimated with some degree of assurance.

It is to be noted that this report has considered the maximum low frequency peak of earth acceleration, as compared to Part I

TIME - SEC. → 0 .1 .2 .3 .4 .5 .6 .7 .8 .9 1.0

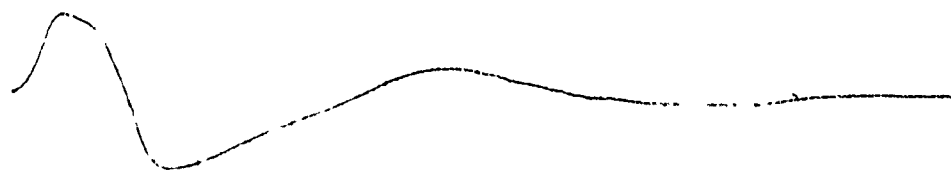

HORIZONTAL EARTH ACCELERATION



VERTICAL EARTH ACCELERATION ($\lambda < 4$)



VERTICAL EARTH ACCELERATION ($\lambda > 4$)



AIR - BLAST PRESSURE ($\lambda \approx 6$)

TIME - SEC. → 0 .1 .2 .3 .4 .5 .6 .7 .8 .9 1.0

FIGURE 1
ESTIMATED WAVE - FORMS
TEST U AND TEST S (IKT)

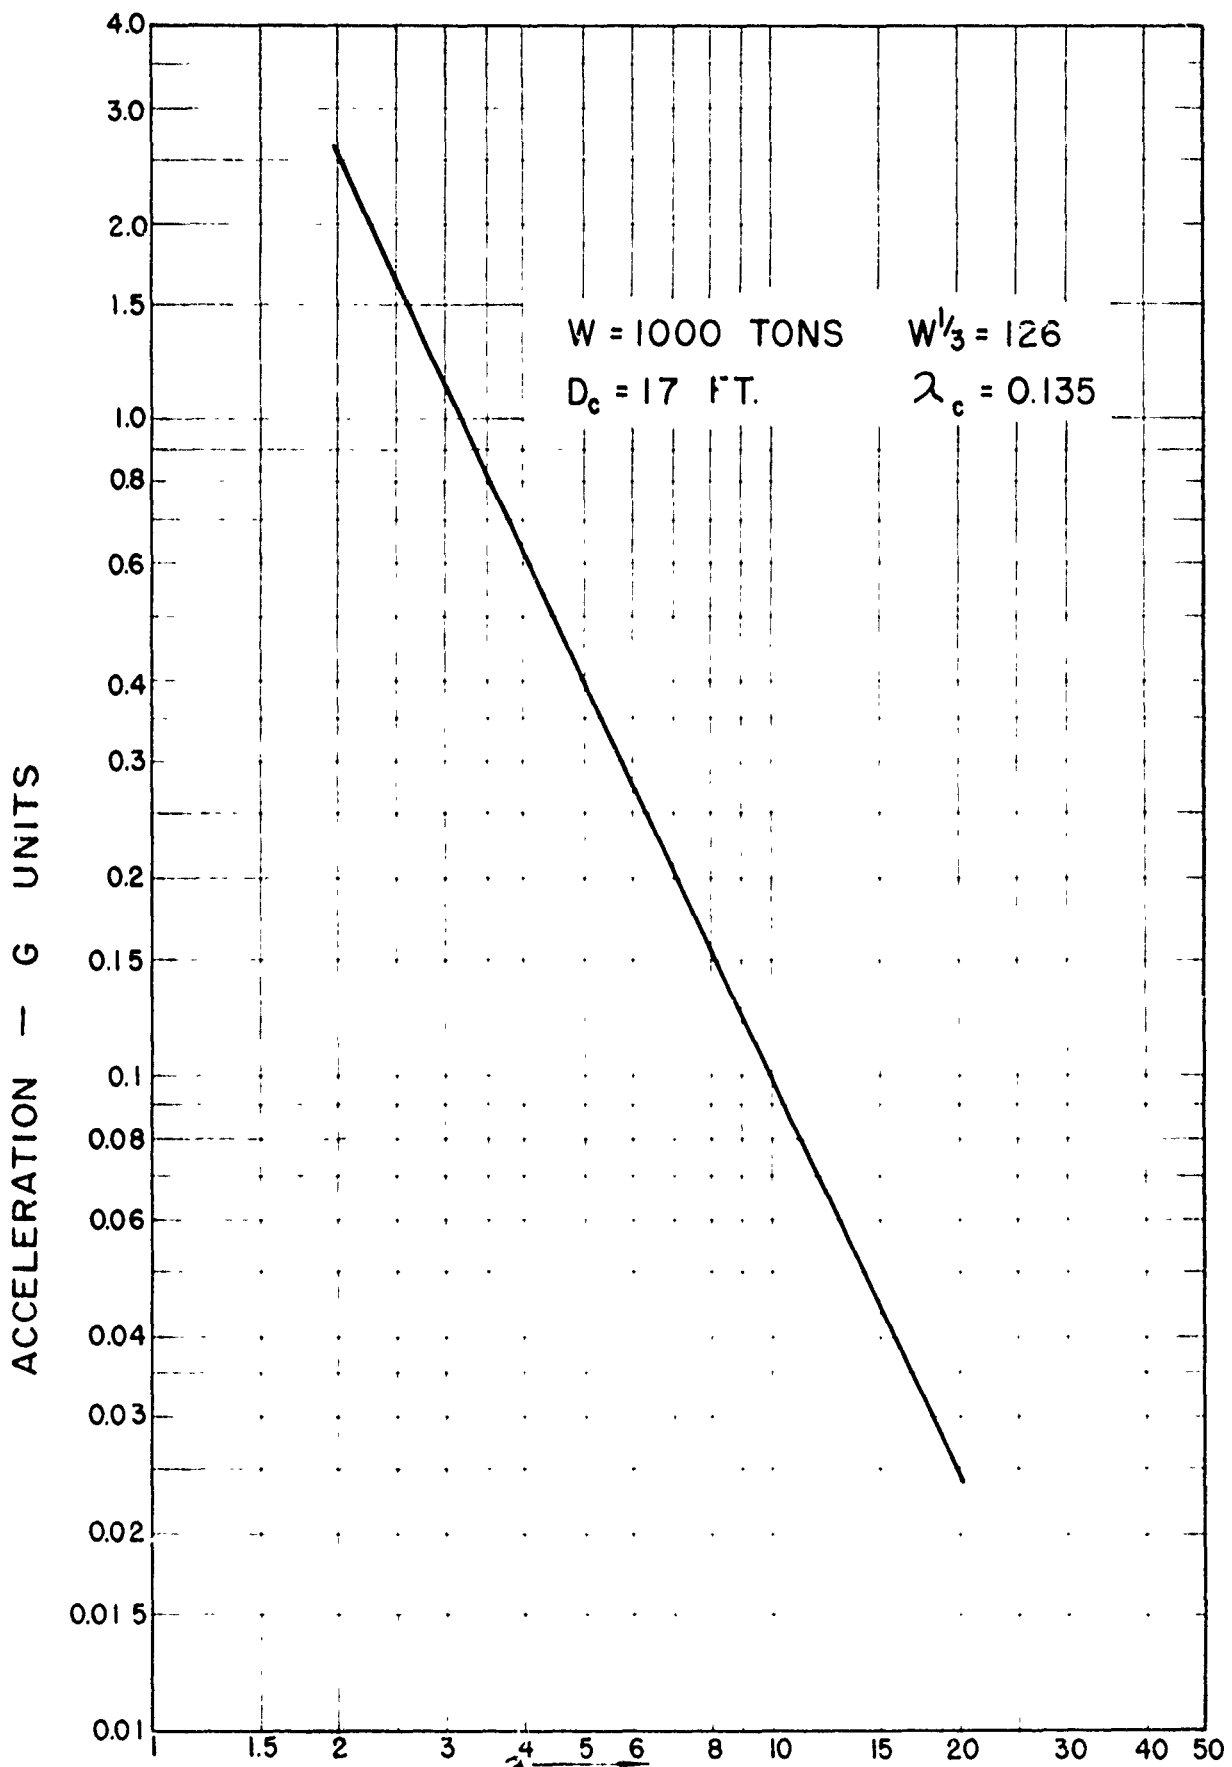


FIGURE 2
PEAK HORIZONTAL EARTH ACCELERATION
(less induced air-blast effect)
TEST U

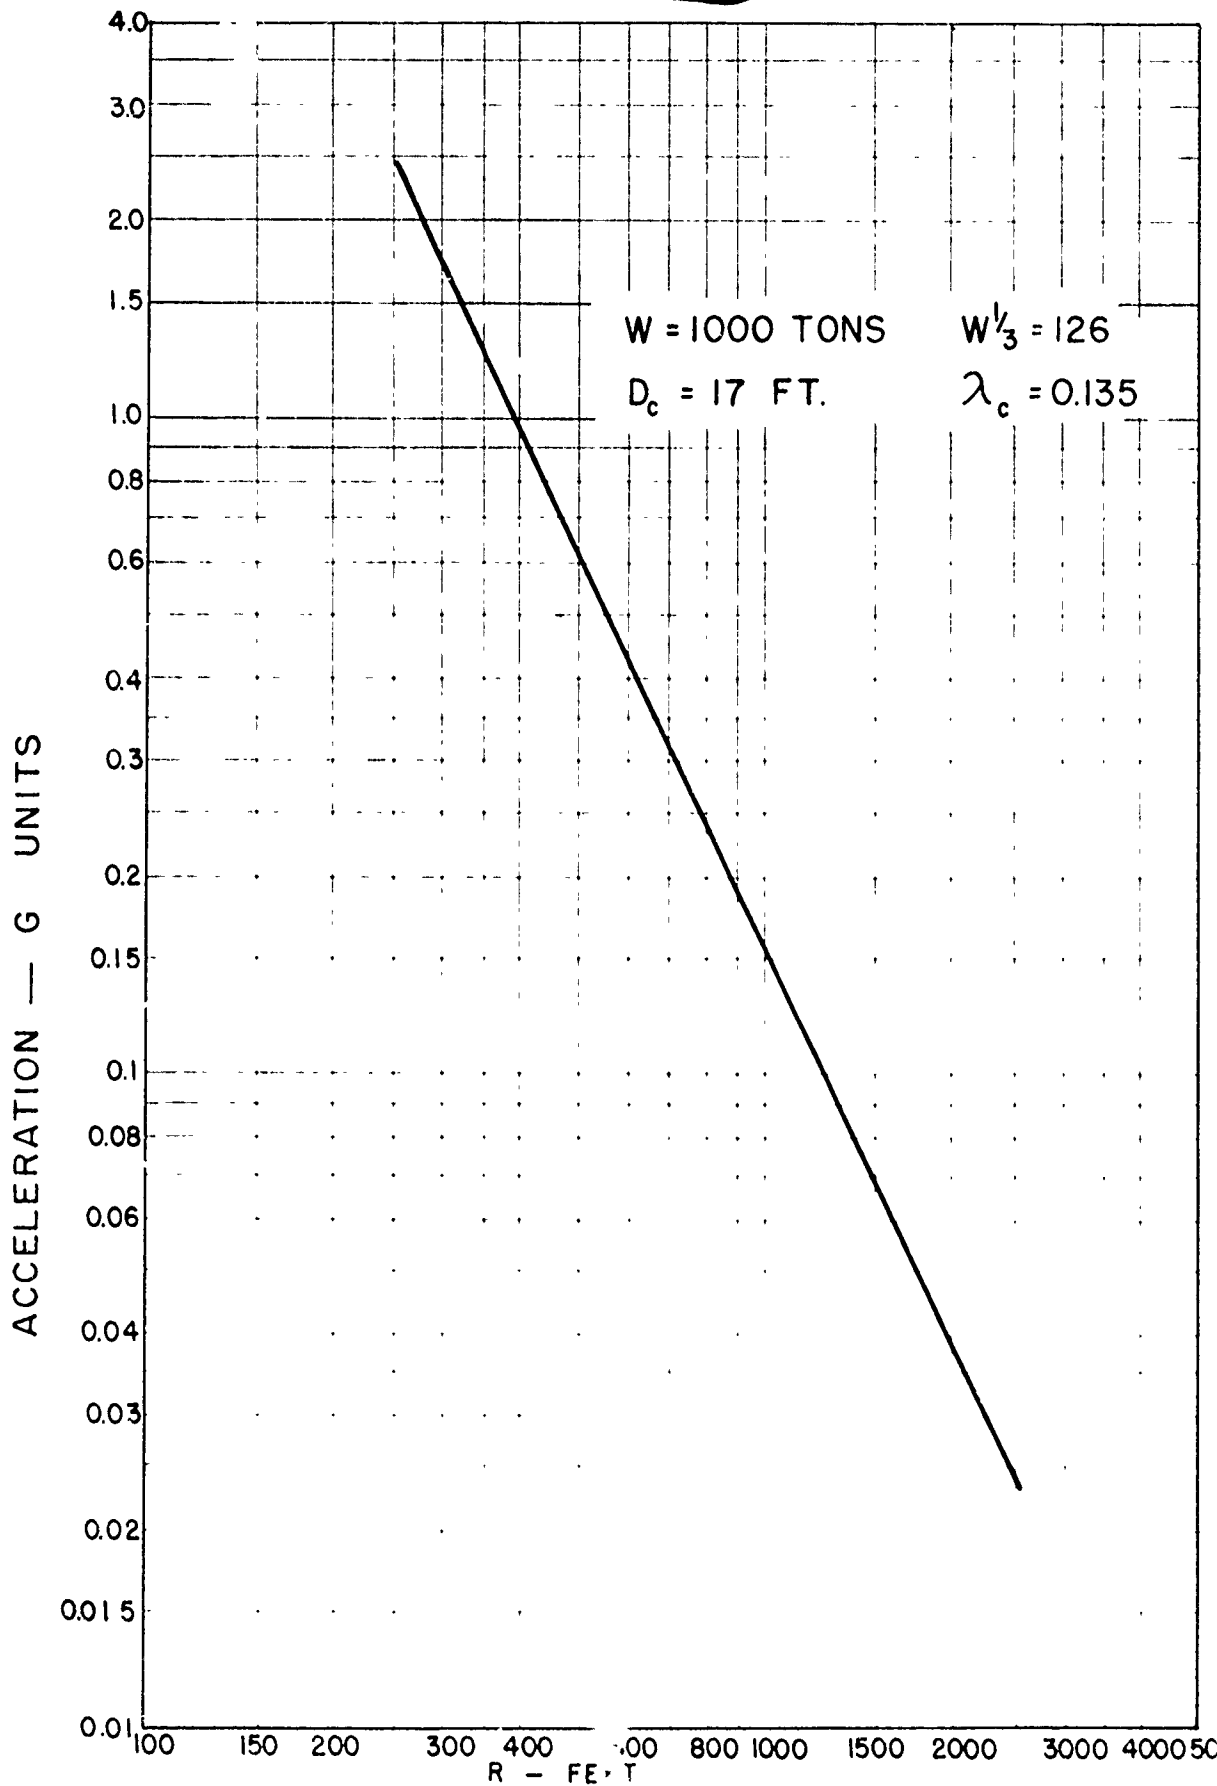


FIGURE 3
PEAK HORIZONTAL EARLY ACCELERATION
(less induced air blast effect)
TEST

where the first peaks were considered. This makes little difference in the horizontal component, but for the vertical component the maximum low frequency peaks were generally several times greater than the first peaks at λ 6 and larger.


On Test HE-4 the local air-blast induced effects completely dominated the pertinent vertical earth-acceleration records. It is impractical to estimate the low frequency vertical earth acceleration for Test S, although there is some reason to believe that the wave-forms and amplitudes may differ quite markedly from those estimated for Test U. In general, the amplitudes are expected to be lower.

The earth-acceleration measurements reported were obtained at a gage depth of five feet for all HE tests. A few measurements at a depth of 17 feet on HE-2 showed no major difference in either wave-form or amplitude. Except for local induced air-blast effects it is believed that the earth accelerations will not be greatly different at the principal gage depths of five and ten feet planned for the two nuclear tests.

IV Local Air-Blast Induced Effects on Earth Acceleration

A comparison of the vertical earth acceleration records from HE-1 and HE-2 shows that the local air-blast induced acceleration peaks were about the same for the two tests at equal λ distances. If anything, there was a slight increase with charge size. From this it would appear that this phenomenon does not follow the simple acceleration model law, wherein for scaled experiments the peak acceleration is inversely proportional to charge diameter ($W^{1/3}$). Furthermore, the durations of the induced accelerations for HE-1 and HE-2 were of nearly the same value, again indicating a failure to scale.

Figure 4 shows the approximate wave-form of this phenomenon.



Period approx. 0.025 sec.

FIGURE 4

LOCAL AIR-BLAST INDUCED VERTICAL EARTH ACCELERATION

It is possible to visualize this phenomenon as resulting from the sharp front of the air-blast wave, and being relatively independent of the positive phase duration of the pressure wave as long as the duration is somewhat greater than the period of the induced acceleration. This period could be a function of the earth's characteristics and the gage depth. If this reasoning is correct it could lead to the conclusion that, for a fixed gage depth (in feet), the peak induced acceleration at a fixed λ distance is constant for all charge sizes above a certain minimum value, since the peak air-blast pressure for fixed λ values is independent of charge size for scaled experiments. Although this is probably of little military importance, it could have a profound effect upon the design of instrumentation, since these short duration peaks would have a greater amplitude relative to the low frequency earth accelerations for larger charges, with phasing dependent upon the seismic and air shock velocities.

On HE-1 and HE-2 these induced peaks of vertical earth acceleration had values ranging from 6 G at λ 2 to 2 G at λ 8. If these values remain constant for the scaled U test they are much greater than the estimated low frequency peaks. Based on a few HE-2 measurements at a depth of 17 feet it is estimated that this effect would be somewhat reduced at a gage depth of ten feet instead of five feet.

V Air-Blast Pressure

The HE-1 and HE-2 air-blast pressure records indicate good model law behavior. Hence it is expected that the model law can also be applied to HE-4 for air-blast pressure. One estimated air-blast pressure record (λ 6) is shown on Figure 1. This wave-form should apply to both the U and S tests, with the positive phase duration varying from about 0.2 second at λ 4 to 0.35 second at λ 15. Estimated peak air-blast pressures for U and S are shown on Figures 5 and 6.

VI Earth Pressure

As discussed in Part I, the earth-pressure measurements on the HE tests were made in shallow holes. No reasonable model law behavior could be established between HE-1 and HE-2 because of the limited measurements on HE-1. Two measurements at a gage depth of 17 feet on HE-2 (holes filled to the top with Aquagel solution) gave peak values about three times those obtained in the five-foot holes. No formal estimate is made of the earth pressure for the U and S tests. For instrumentation at a depth of ten feet on Test U peak earth-pressure values are estimated at twice those reported for HE-2 in Part I (for the same λ values of gage distance from ground zero).

It is worth noting that the local air-blast induced effects on

~~SECRET~~

UNCLASSIFIED

9.

the earth-pressure measurements (open holes) on HE-4 were most pronounced at fairly large λ values. This is perhaps due to the fact that the air-blast pressure is attenuated less rapidly with distance than is the earth pressure.

~~SECRET~~
UNCLASSIFIED

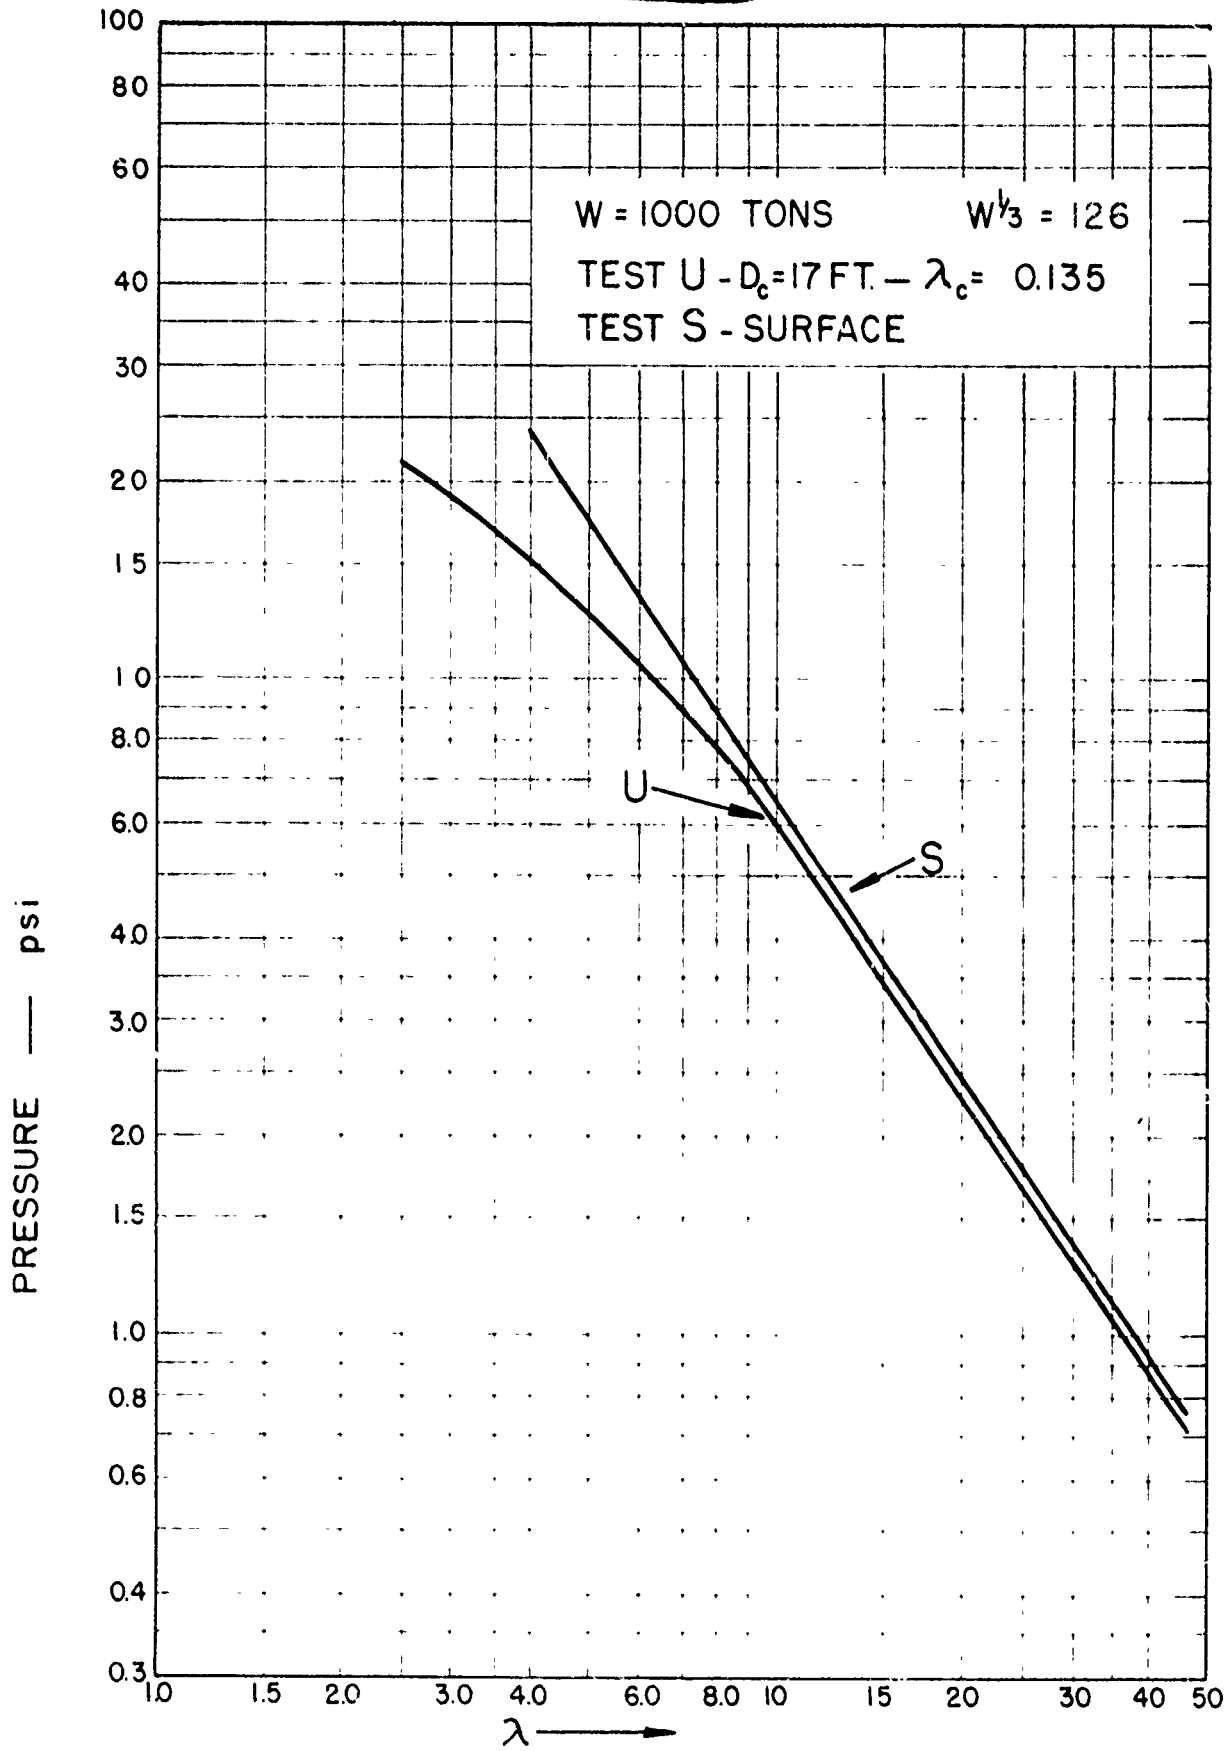


FIGURE 5
PEAK AIR - BLAST PRESSURE
TEST U AND TEST S

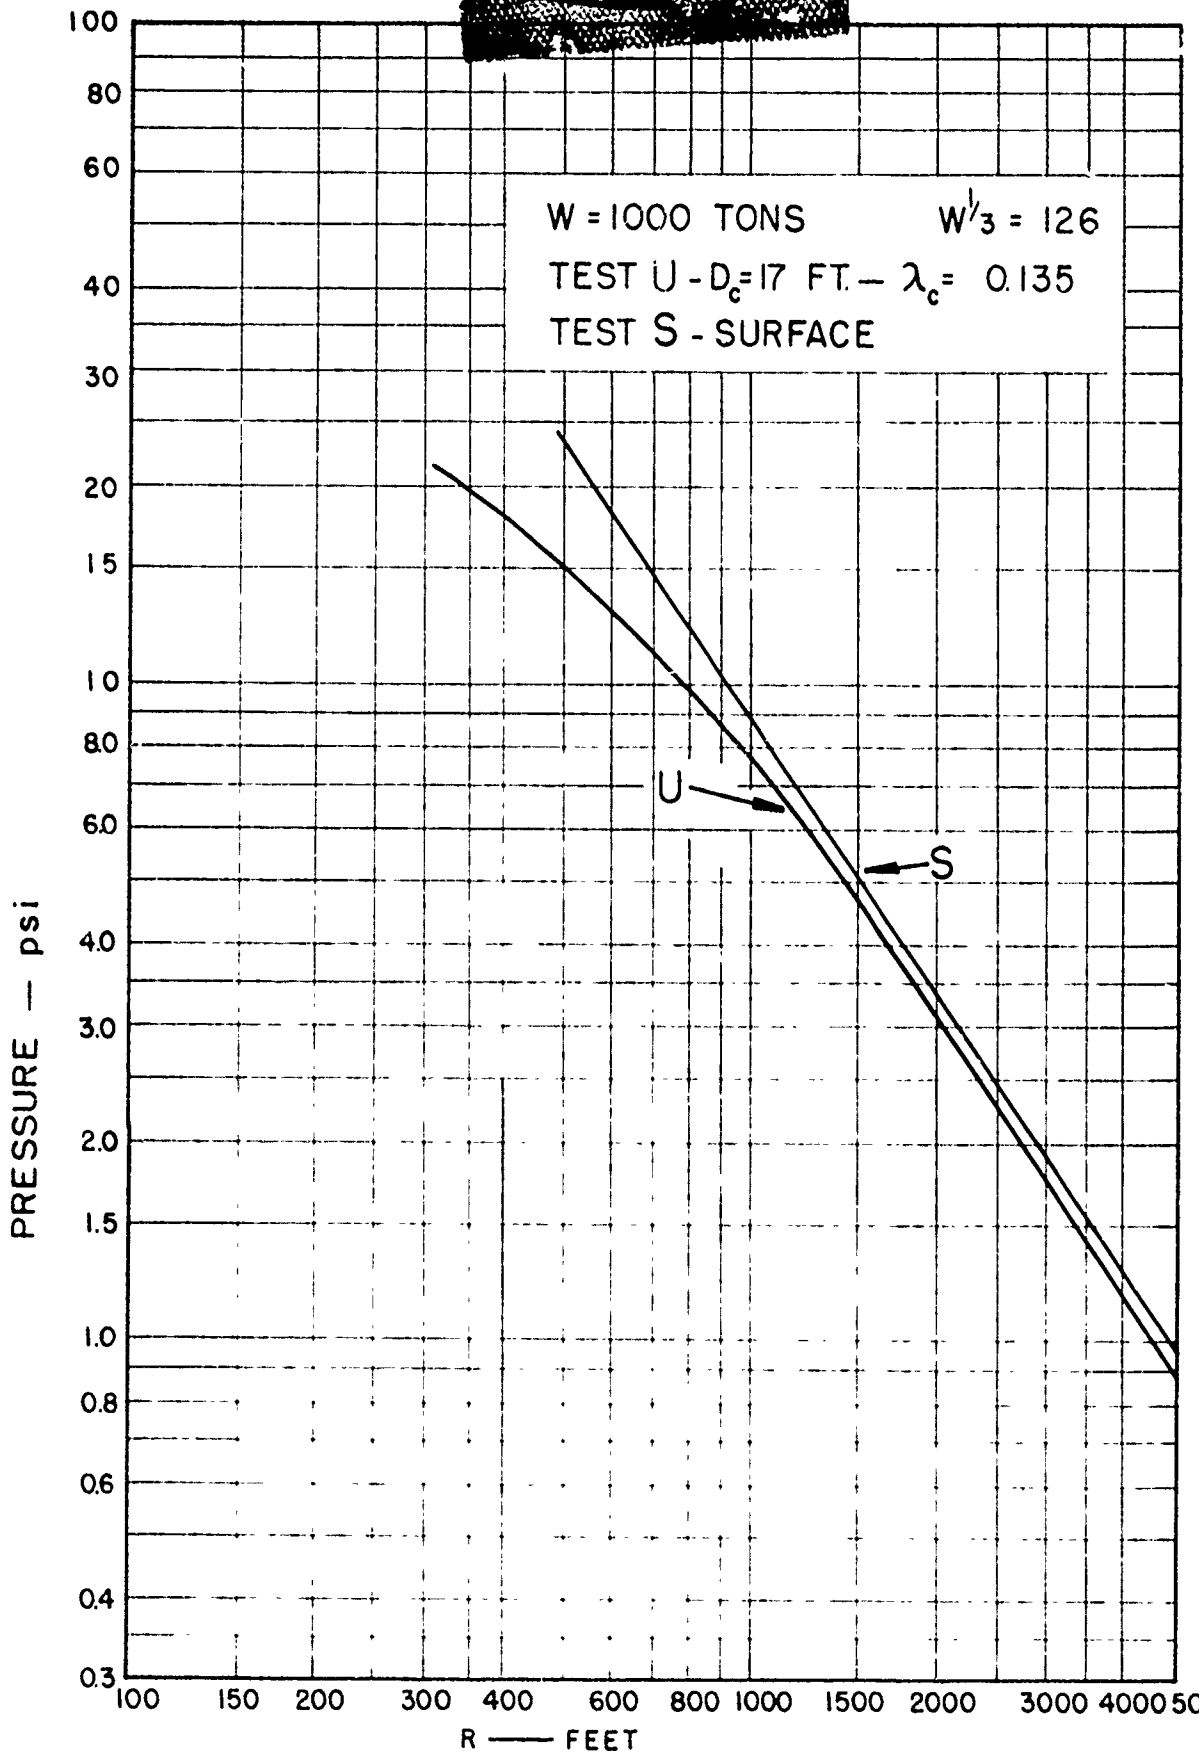


FIGURE 6
PEAK AIR - BLAST PRESSURE
TEST U AND TEST S