

UNCLASSIFIED

AD 646 635

COMPARISON OF THREE THEORIES OF WATER-JET  
PROPULSION

John H. Garrett

U. S. Navy Marine Engineering Laboratory  
Annapolis, Maryland

February 1967

*Processed for . . .*

DEFENSE DOCUMENTATION CENTER  
DEFENSE SUPPLY AGENCY



U. S. DEPARTMENT OF COMMERCE / NATIONAL BUREAU OF STANDARDS / INSTITUTE FOR APPLIED TECHNOLOGY

UNCLASSIFIED



AD 646635


Comparison of Three Theories  
of the Cost of Propulsion

Assignment 55-501  
Technical Memorandum 484/56  
February 1967

By  
John H. Clarron

**U. S. NAVY**  
**MARINE ENGINEERING LABORATORY**

Annapolis, Md.

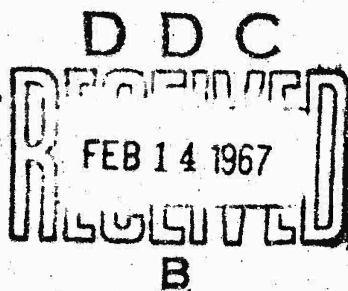

**Dedicated To PROGRESS IN MARINE ENGINEERING**

Distribution of this document is unlimited.

**ARCHIVE COPY**

ACCESSION FOR		
ORSTI	WHITE SECTION	<input checked="" type="checkbox"/>
DDC	BLUE SECTION	<input type="checkbox"/>
U.S. BUREAU		<input type="checkbox"/>
IDENTIFICATION		
REGION / AVAILABILITY CODES		
REG.	AVAIL.	SPECIAL
7		

**DEDICATED TO PROGRESS IN MARINE ENGINEERING**

The Marine Engineering Laboratory is charged with the discovery of fundamental knowledge, the development of new and unique equipment to meet and anticipate new naval requirements, analysis of Fleet machinery failures, and evaluation of prototypes to insure high performance and reliability in the Fleet. Dedicated to progress in naval engineering, the Marine Engineering Laboratory contributes to the technical excellence and superiority of the Navy today - and tomorrow.



ANY MATTERS OF COMMERCIAL CONFIDENCE INCLUDED IN THIS REPORT MUST BE TREATED WITH DUE REGARD FOR THE SAFEGUARDING OF PROPRIETARY INTERESTS.

THE INFORMATION CONTAINED HEREIN SHALL NOT BE USED FOR ADVERTISING PURPOSES.

THIS REPORT HAS BEEN MACHINE ASSEMBLED. IF ANY PAGES ARE MISSING, PLEASE REQUEST FROM MEL.

Comparison of Three Theories  
of Water-Jet Propulsion

Assignment 55 501  
Technical Memorandum 484/66  
February 1967

By  
John H. Garrett

  
\_\_\_\_\_  
JOHN H. GARRETT

Approved by:

  
\_\_\_\_\_  
E. M. HERRMANN

MEL Technical Memorandum 484/66

Distribution List

NAVSHIPS (SHIPS 2021) (2)  
NAVSHIPS (SHIPS 031)  
DDC (20)  
NAVSECPHILADIV  
DTMB  
Addressee (10)

ABSTRACT

The three different approaches to derivation of formulae expressing the relations among speed, thrust, power, and efficiency of water-jet propulsion systems, as developed by Lockheed California Company; Virgil Johnson of Hydro-nautics, Incorporated; and Joseph Levy of Aerojet-General Corporation, are summarized and compared. Certain modifications and simplifications are incorporated, and terminology is modified as necessary to facilitate comparison.

The Lockheed system, which provides a method for including the weight and drag of the propulsion system in the optimization procedure, appears to be the more useful.

The problems of compromising the performance of the propulsion system at cruising speed in order to provide reasonable hump performance are briefly discussed

## TABLE OF CONTENTS

	<u>Page</u>
DISTRIBUTION LIST	ii
ABSTRACT	iii
INTRODUCTION	1
Considerations	1
Comparisons	1
WATER-JET PROPULSION FUNDAMENTALS	1
Ideal	1
Actual	3
SUMMARIES	5
Water Jet Propulsion for High Speed Hydrofoil Craft	5
The Design of Water-Jet Propulsion Systems for Hydrofoil Craft	10
Waterjet Propulsion System Study	13
WATER-JET PUMPS	21
PERFORMANCE MAPS	34
DISCUSSION	37
FUTURE PLANS	38
APPENDIXES	
Appendix A - Nomenclature (2 pages)	
Appendix B - Technical References	

## COMPARISON OF THREE THEORIES OF WATER-JET PROPULSION

### 1.0 INTRODUCTION

The U. S. Navy Marine Engineering Laboratory is assisting the David Taylor Model Basin in the machinery aspects of the surface effects ship and hydrofoil programs. Both of these programs may utilize water jets as the main propulsion method. In order to establish a base from which to initiate machinery system layouts as well as to identify areas requiring further development, a review of some of the principles of water-jet propulsion was undertaken. This is a summary of previous papers on the subject together with suggestions for further work. A list of the nomenclature used for this study is contained in Appendix A.

**1.1 Considerations.** Development of the preliminary design of a water-jet system involves the following steps as a minimum:

- Devising a rationale for optimizing the  $V_j/V_0$  ratio. The important factor is the method of incorporating various losses chargeable against the propulsion system, since these are primary considerations in determining the optimum jet velocity.
- Consideration of the compromises required to provide adequate performance at the hump condition, while retaining high efficiency at cruise.
- Determination of the relation between performance parameters developed under the two above items and pump design.
- Optimization of the system by iteration procedures.

**1.2 Comparisons.** The three studies,<sup>1,2,3</sup> provide three different methods for optimizing the  $V_j/V_0$  ratio. These are summarized and compared modifying the approach and the nomenclature of the originals where necessary to facilitate comparison.

### 2.0 WATER-JET PROPULSION FUNDAMENTALS

**2.1 Ideal.** The same basic approach to developing the theory of water-jet propulsion is adopted in all reviews of the subject. Considering first an ideal system, that is, one in which there are no internal energy losses, the thrust produced by the jet is equal to the increase in momentum of the water:

$$T = \rho Q (V_j - V_0). \quad \dots (1)$$

<sup>1</sup>Superscripts refer to similarly numbered entries in Appendix B.



The useful work done on the vessel is equal to the product of the thrust and the velocity of the vessel:

$$\text{Useful work} = T V_o \quad \dots (2)$$

The power output of the pump is equal to the rate of increase of kinetic energy of the water passing through the system:

$$P_{\text{pump}} = \frac{\rho Q}{2} (V_j^2 - V_o^2), \quad \dots (3)$$

or, expressed in terms of head produced by the pump:

$$P_{\text{pump}} = \rho Q g H_{\text{ideal}} \quad \dots (4)$$

The ideal propulsive efficiency is equal to the ratio of the useful work done on the ship to the power supplied by the pump:

$$\eta_{\text{pi}} = \frac{T V_o}{P} \quad \dots (5)$$

$$= \frac{\rho Q (V_j - V_o) V_o}{\frac{\rho Q}{2} (V_j^2 - V_o^2)} \quad \dots (5a)$$

$$= \frac{2}{1 + \frac{V_j}{V_o}} \quad \dots (6)$$

Equating Equations (3) and (4) shows that, as would be expected, the potential energy of the water, as represented by the pump head, is ideally equal to the kinetic energy of the water in the jet, less the kinetic energy of the intake water:

$$\frac{\rho Q}{2} (V_j^2 - V_o^2) = \rho Q g H_{\text{ideal}}$$

or

$$H_{\text{ideal}} = \frac{V_j^2 - V_o^2}{2g}$$

The shaft power input is equal to the power output of the pump (Equation (3)), divided by the pump efficiency:

$$P = \frac{\rho Q}{2\eta_{pu}} (V_j^2 - V_o^2), \quad \dots (7)$$

or, using Equation (4),

$$P = \frac{\rho Q g H_{ideal}}{\eta_{pu}}. \quad \dots (7a)$$

**2.2 Actual.** In an actual system, the power requirement is increased by the amount required to overcome the frictional losses of the water in the inlet, ducts, and nozzle. It is convenient to express these losses in the form of the additional head required to offset the losses. As the losses are likely to be roughly proportional to the square of the velocity of the water through the system, the loss is equal to a constant times some velocity head.

$$H_L = k \frac{V^2}{2g}.$$

The choice of  $V$  varies among the three studies being reviewed. Johnson uses the ship velocity,  $V_o$ ; Levy<sup>2</sup> uses the jet velocity,  $V_j$ ; and Lockheed<sup>3</sup> uses the velocity of the water in the inlet duct,  $V_i$ . The value of  $k$  varies, depending on which velocity is selected as the measure of the loss.

In any case, the equations for the ideal system are modified to represent the actual system by adding to the head supplied by the pump the additional head required to overcome the loss.

Thus,

$$\begin{aligned} H &= H_{ideal} + H_L \\ &= \frac{V_j^2 - V_o^2}{2g} + k \frac{V^2}{2g}. \quad \dots (8) \end{aligned}$$

If  $V_j$  is selected as the measure of internal loss, Equation (8) becomes

$$H = \frac{(1+k) V_j^2 - V_o^2}{2g} \quad \dots (9)$$

If  $V_o$  is selected,

$$H = \frac{V_j^2 - (1 - k) V_o^2}{2g} \quad \dots (10)$$

If  $V_1$  is selected,

$$H = \frac{V_j^2 + k V_1^2 - V_o^2}{2g} \quad \dots (11)$$

If the difference of elevation between the outside water level and the nozzle exit level is substantial, the energy required to elevate the water may be included in the equation as an additional pump input, so that

$$H = \frac{V_j^2}{2g} + k \frac{V_x^2}{2g} + h - \frac{V_o^2}{2g} \quad \dots (12)$$

It should be noted that, in all of these equations, the "head" is a measure of energy with the dimension foot-pounds per pound of water and is not simply a dimension, feet.

Substituting the value of H from Equation (12) into Equation (4) and dividing by the pump efficiency to obtain an expression for shaft power input,

$$\begin{aligned} P &= \frac{\rho Q g}{\eta_{pu}} \left( \frac{V_j^2}{2g} + k \frac{V_x^2}{2g} + h - \frac{V_o^2}{2g} \right) \\ &= \frac{\rho Q}{2\eta_{pu}} (V_j^2 + k V_x^2 + h - V_o^2). \end{aligned} \quad \dots (13)$$

Substituting this value for P in Equations (5) and (5a),

$$\frac{\eta_{pi}}{\eta_{pu}} = \frac{2 (V_j - V_o) V_o}{V_j^2 + k V_x^2 + h - V_o^2} \quad \dots (14)$$

Dividing the numerator and denominator of Equation (14) by  $V_o^2$ , an expression with the jet velocity ratio  $V_j/V_o$  as the variable is formed, Equation (14) becomes

$$\frac{\eta_{pi}}{\eta_{pu}} = \frac{\left( \frac{V_j}{V_o} - 1 \right)}{\frac{V_j^2}{V_o^2} + k \frac{V_x^2}{V_o^2} + \frac{h}{V_o^2} - 1} \quad \dots (15)$$

A plot of this equation for various values of  $k$  provides a series of curves with shape similar to those of Figure 1. The optimum  $V_j/V_o$  ratio can either be found graphically from the plot or numerically by differentiating Equation (15).

Another expression for efficiency using  $H$  instead of  $V^2/2g$  is secured from Equation (7a).

$$\begin{aligned} \frac{\eta_{pi}}{\eta_{pu}} &= \frac{\rho Q (V_j - V_o) V_o}{\rho Q g H} \\ &= \frac{(V_j - V_o) V_o}{g H} \end{aligned} \quad \dots (16)$$

It should be recognized that, in an actual system, the summation of losses contributed by each of the components over a range of operating conditions cannot be precisely evaluated by any such expression as  $k (V_x^2/2g)$ . To analyze the losses of a specific design, it is necessary to calculate the loss to be expected in each element under an appropriate range of parameters and then to optimize the system by iteration. Computer programming is almost mandatory to accomplish this with any precision within a reasonable allocation of engineering manpower.

### 3.0 SUMMARIES

With this as a foundation, it is in order to proceed to a review of the differences in the detailed approach taken by the respective authors of the references:

3.1 "Water Jet Propulsion for High Speed Hydrofoil Craft." Johnson's<sup>1</sup> basic assumption is that the summation of internal energy losses (except nozzle loss) is related to  $V_o$ ; that is,

$$H_L = k \frac{V_o^2}{2g}.$$

Another factor,  $K$ , includes both the elevation and the loss heads. Thus,

$$K = k + \frac{2gh}{V_o^2}.$$

For convenience in developing the equations, Johnson uses the factor,  $H^*$ , defined as the ratio of head produced by the pump to the dynamic head,

$$H^* = \frac{2gH}{V_o^2}.$$

USN MARINE ENGINEERING LABORATORY

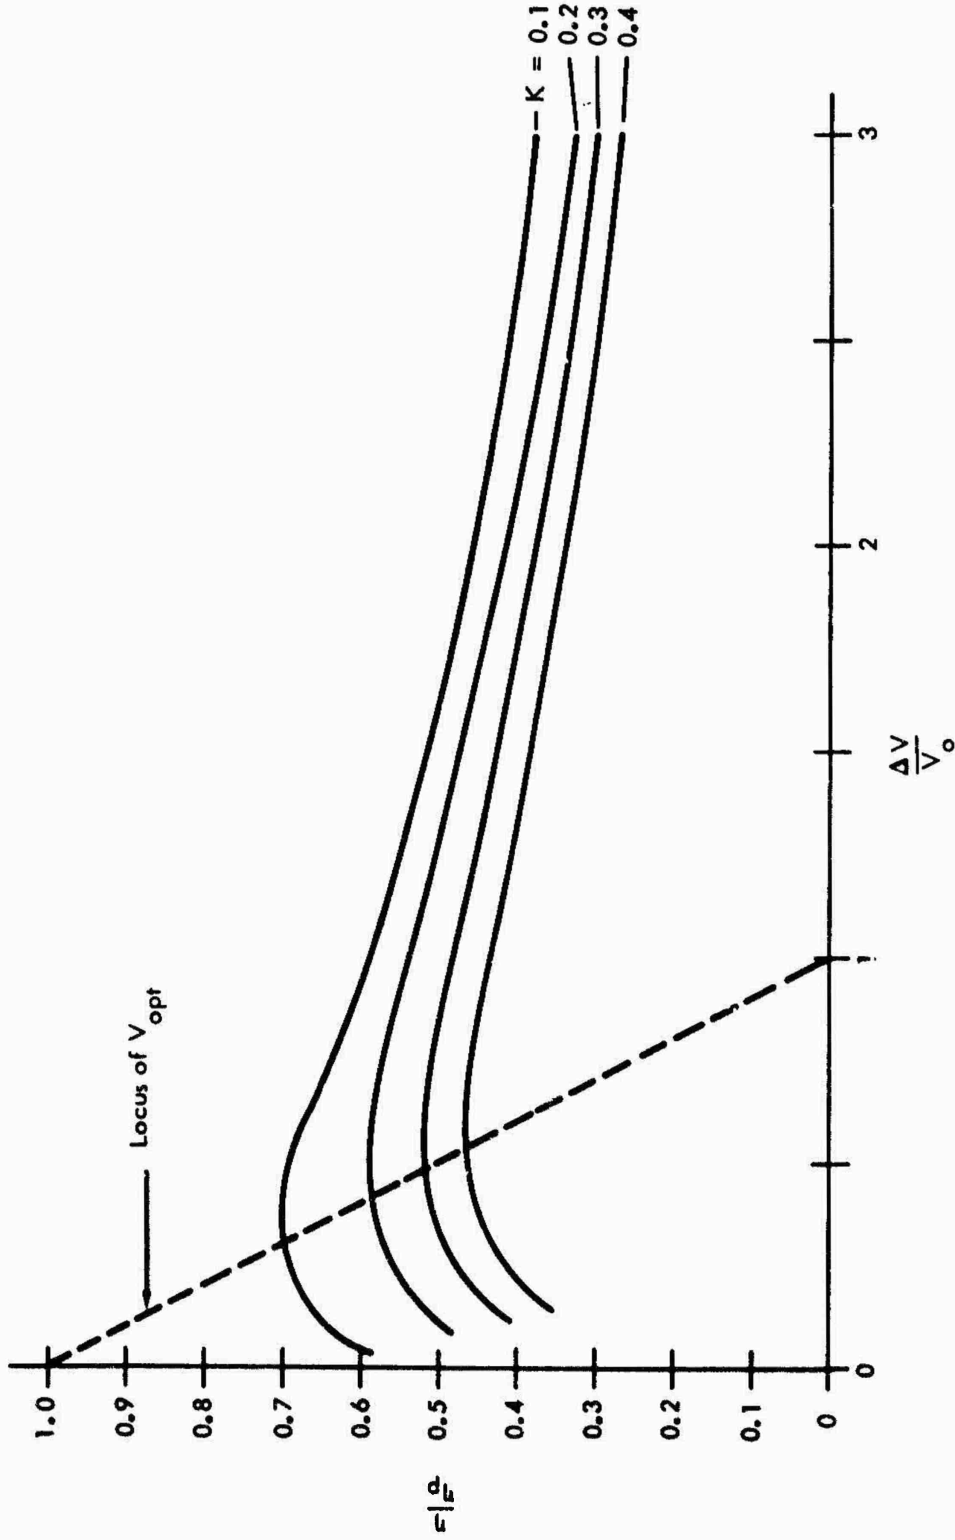


Figure 1  
Relation Between Propulsive Efficiency and Velocity Ratio for Various Loss Factors

If Equation (12) is solved for  $V_j$ , the following expression can be obtained:

$$V_j = V_o \left( 1 - k + \frac{2gH}{V_o^2} - \frac{2gh}{V_o^2} \right)^{\frac{1}{2}} \quad \dots (17)$$

Substituting Equation (17) in (16):

$$\frac{\eta_{pi}}{\eta_{pu}} = 2 \left[ \left( 1 - k + \frac{2gh}{V_o^2} - \frac{2gH}{V_o^2} \right)^{\frac{1}{2}} - 1 \right] \frac{V_o^2}{2gH}.$$

Substituting  $K$  and  $H^*$  (defined above), this equation simplifies to

$$\frac{\eta_{pi}}{\eta_{pu}} = \frac{2 \left[ (1 - K + H^*)^{\frac{1}{2}} - 1 \right]}{H^*}. \quad \dots (18)$$

This is plotted in Figure 2 for the range of  $H^*$  from zero to five and for several values of  $K$ . Values of  $H^*$  beyond five are generally not of interest (except perhaps at or below hump speed, where  $V_o$  is relatively low). By differentiating Equation (18), the following expression for  $H^*$  optimum results:

$$H_{opt}^* = 2K + 2\sqrt{K}. \quad \dots (19)$$

The locus of  $H_{opt}^*$  is also shown in Figure 2.

Equation (19) implies that

$$H_{opt} = \frac{V_o^2}{g} (K + \sqrt{K}). \quad \dots (20)$$

A plot of  $H_{opt}$  against  $V_o$  for various values of  $K$  is shown in Figure 3.

An expression for  $V_{j\ opt}$  in terms of  $V_o$  and  $K$  can be derived from Equation (20),

Since

$$\frac{V_{j\ opt}^2}{2g} = H_{opt} - H_L - h + \frac{V_o^2}{2g},$$

$$\frac{V_{j\ opt}^2}{2g} = H_{opt} - K \frac{V_o^2}{2g} + \frac{V_o^2}{2g}$$

USN MARINE ENGINEERING LABORATORY

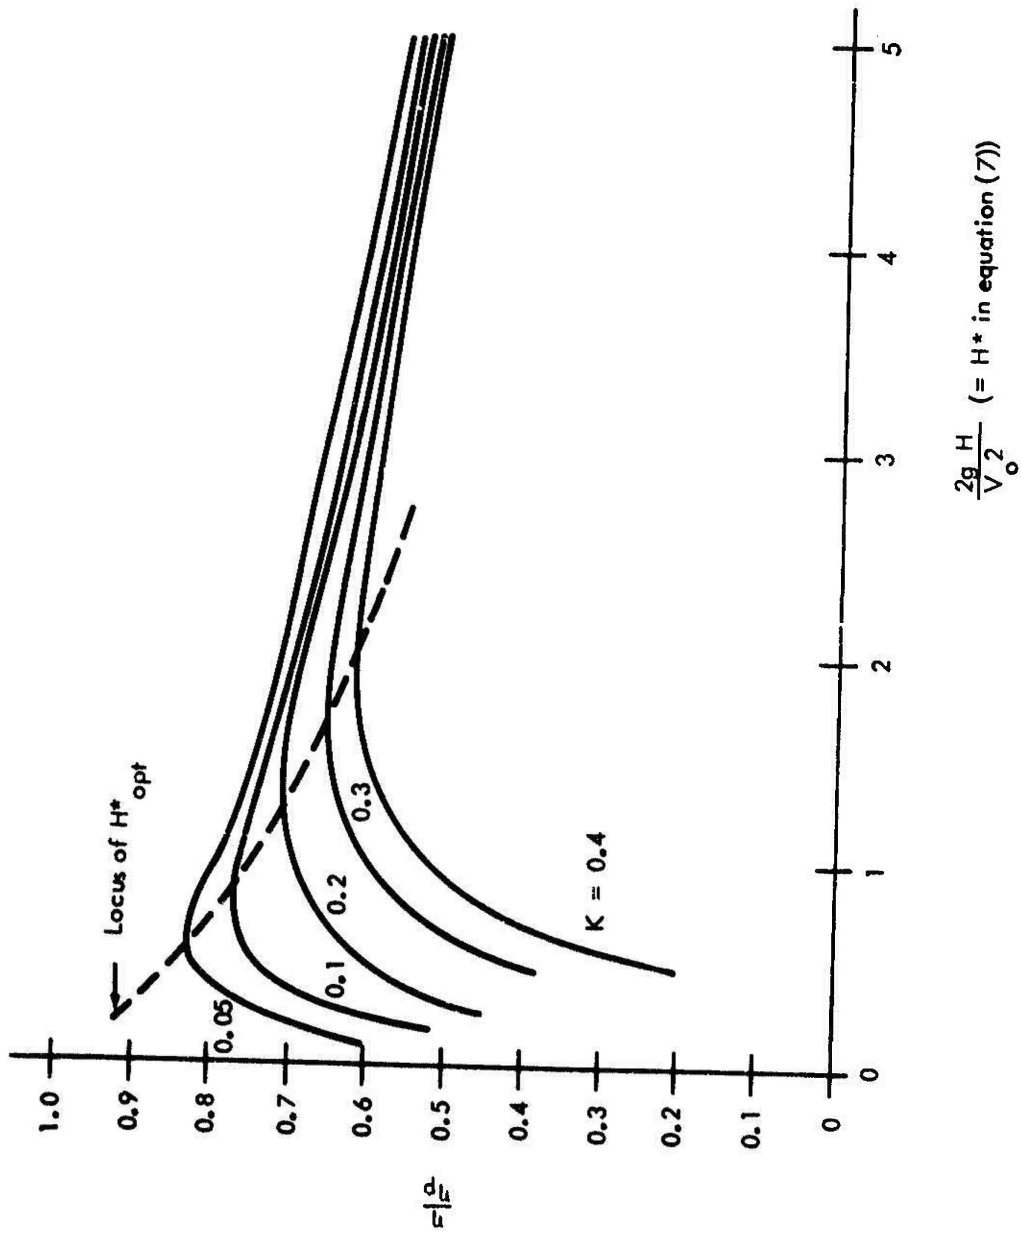


Figure 2  
 Relation Between Propulsive Efficiency and Pump/Velocity Head  
 Ratio for a Range of Loss Factors (Johnson Method)

USN, MARINE ENGINEERING LABORATORY

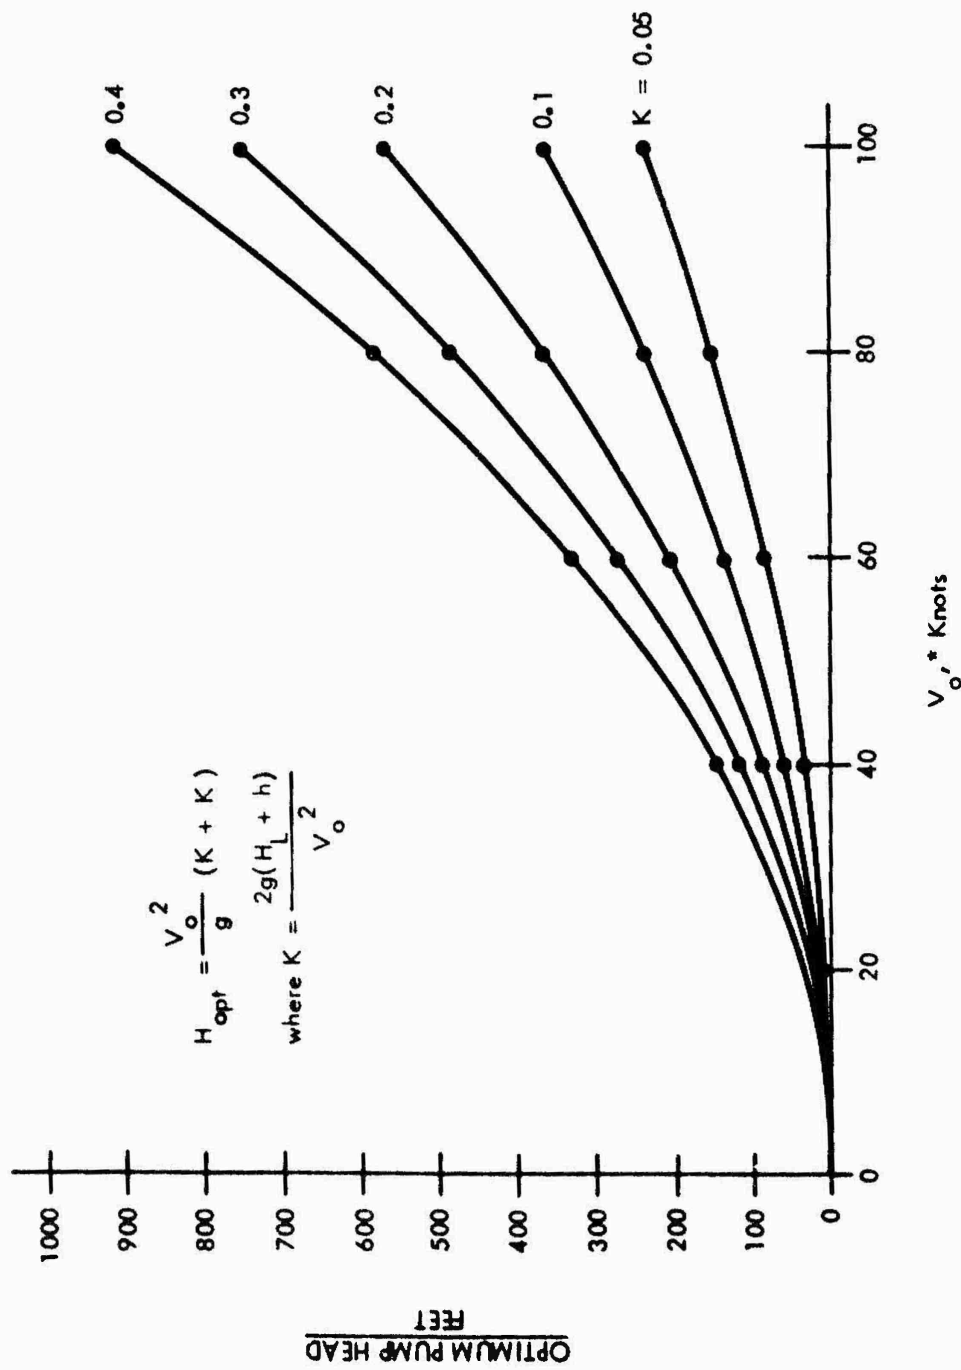


Figure 3  
 Relation Between Optimum Pump Head and Ship Speed  
 for a Range of Internal Energy Loss Factors (Johnson Method)



Substituting the value of  $H_{opt}$  from Equation (19),

$$\frac{V_j^2 \text{ opt}}{2g} = \frac{V_o^2}{g} (K + \sqrt{K}) - \frac{V_o^2}{2g} K + \frac{V_o^2}{2g}.$$

This reduces to

$$\frac{V_j \text{ opt}}{V_o} = \sqrt{K + 2\sqrt{K} + 1} \quad \dots (21)$$

Figure 4 is a plot of Equation (21) for various values of K.

Johnson suggests that the minimum practical value of K for hydrofoil vessels will fall in the range 0.15 to 0.34, depending upon the size and speed.

3.2 "The Design of Water-Jet Propulsion Systems for Hydrofoil Craft." Levy<sup>2</sup> makes the basic assumption that the summation of internal energy losses through the system bears a fixed relationship to the energy represented by the jet velocity,  $V_j^2/2g$ . He adopts somewhat different terminology, in that he uses a term, k (here called r to avoid confusion with the loss factor k), such that

$$r = \frac{\Delta V}{V_o} = \frac{V_j - V_o}{V_o} = \frac{V_j}{V_o} - 1$$

From Equation (3), neglecting internal energy losses,

$$P = \frac{\rho Q}{2\eta_{pu}} (V_j^2 - V_o^2)$$

Since

$$\begin{aligned} V_j^2 &= (V_o + \Delta V)^2 \\ &= V_o^2 (1 + r)^2 \end{aligned}$$

$$P = \frac{\rho Q V_o^2}{2\eta_{pu}} \left[ (1+r)^2 - 1 \right] \quad \dots (22)$$

$$= \frac{\rho Q V_o^2 r}{2\eta_{pu}} (r + 2). \quad \dots (23)$$

USN MARINE ENGINEERING LABORATORY

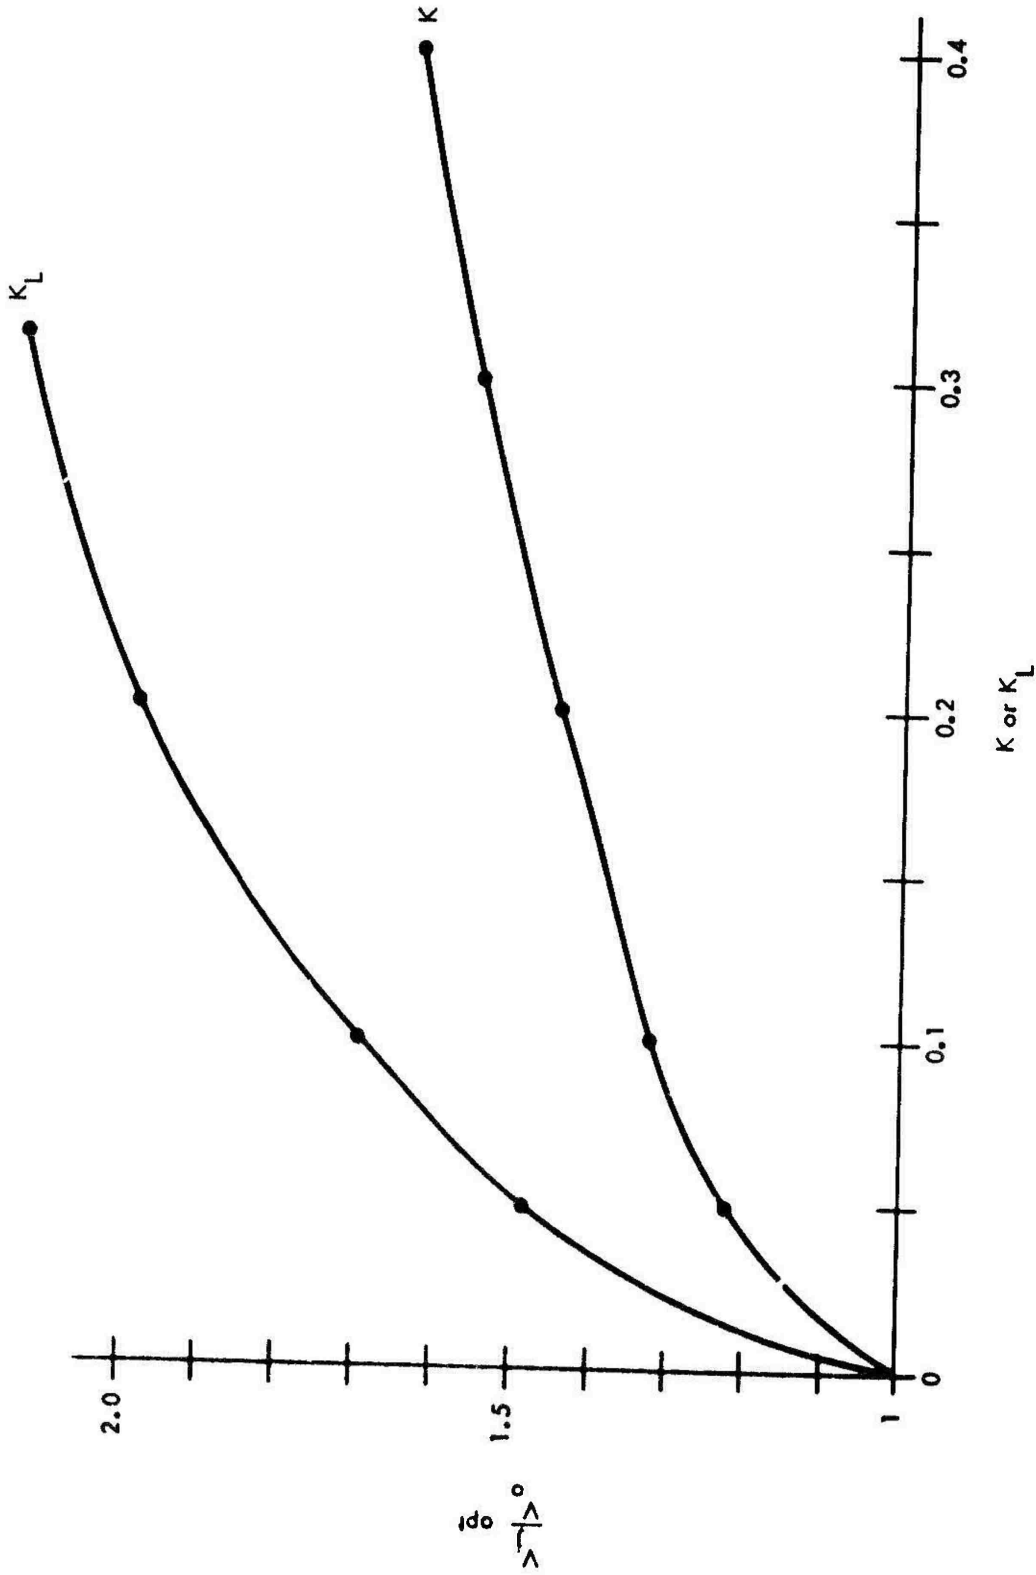


Figure 4  
Optimum  $V_j/V_o$  Ratio in Relation to Loss Factor

The ideal propulsion efficiency,  $T V_o/P$ , is then

$$\frac{\eta_{pi}}{\eta_{pu}} = \frac{\rho Q V_o^2 r}{\frac{\rho Q V_o^2 r (r+2)}{2}} \quad \dots (24)$$

$$= \frac{2}{2+r} \quad \dots (25)$$

In order to take account of internal energy losses in the intake, ducts, and nozzle, a head loss coefficient  $K_L$ , is adopted such that

$$\begin{aligned} H_L &= K_L \frac{V_j^2}{2g} \\ &= K_L \frac{V_o^2}{2g} (1+r)^2. \end{aligned}$$

Taking account of the internal energy losses, the power input, Equation (22) is modified as follows:

$$P = \frac{\rho Q V_o^2}{2\eta_{pu}} \left[ (1+r)^2 (1+K_L) - 1 \right].$$

Substituting this value for P in Equation (24),

$$\frac{\eta_{pi}}{\eta_{pu}} = \frac{2r}{K_L + 2(1+K_L)r + (1+K_L)r^2} \quad \dots (26)$$

The optimum velocity ratio found by differentiating Equation (26) is

$$r_{opt} = \left( \frac{K_L}{1+K_L} \right)^{\frac{1}{2}} \quad \dots (27)$$

Equation (26) is plotted in Figure 1 for a range of  $K_L$  from 0.1 to 0.4.

By substituting  $V_{j\text{opt}} - V_o/V_o$  for  $r_{\text{opt}}$  in Equation (27) and noting that

$$H = (1 + K_L) \frac{V_j^2}{2g} - \frac{V_o^2}{2g}, \quad \dots (28)$$

an expression for optimum pump head in terms of  $V_o$  and  $K_L$  can be derived as follows:

$$\frac{V_{j\text{opt}} - V_o}{V_o} = \left( \frac{K_L}{1 + K_L} \right)^{\frac{1}{2}}$$

$$V_{j\text{opt}} = V_o \left[ \left( \frac{K_L}{1 + K_L} \right)^{\frac{1}{2}} + 1 \right]. \quad \dots (29)$$

Substituting this expression for  $V_{j\text{opt}}$  into Equation (28) results in the desired relationship

$$H_{\text{opt}} = \frac{V_o^2}{2g} \left[ (1 + K_L) \left( \left[ \frac{K_L}{1 + K_L} \right]^{\frac{1}{2}} + 1 \right)^2 - 1 \right]. \quad \dots (30)$$

A plot of Equation (30) for several values of  $K_L$  is shown in Figure 5. A plot of optimum  $V_j/V_o$  ratio as a function of  $K_L$  (Equation (29)) is shown in Figure 4.

**3.3 "Waterjet Propulsion System Study."** In Appendix A of Volume 5 of the Lockheed study<sup>3</sup> a method is derived for establishing the optimum jet velocity for a water-jet propulsion system for a hydrofoil craft. The method depends upon knowledge of the various drag and loss parameters associated with the propulsion system and use of the concept of a basic ship, which is the vessel which would be required to carry the desired payload and fuel if the weight of the necessary propulsion system were zero. The propulsion system is then charged with the additional drag resulting from the growth in size of the vessel required to carry the propulsion plant, as well as additional drag due to propulsion appurtenances, such as underwater struts or scoops.

The overall efficiency of the propulsion plant is defined as the ratio of useful work done on the basic ship to the shaft power output of the engine.

USN MARINE ENGINEERING LABORATORY

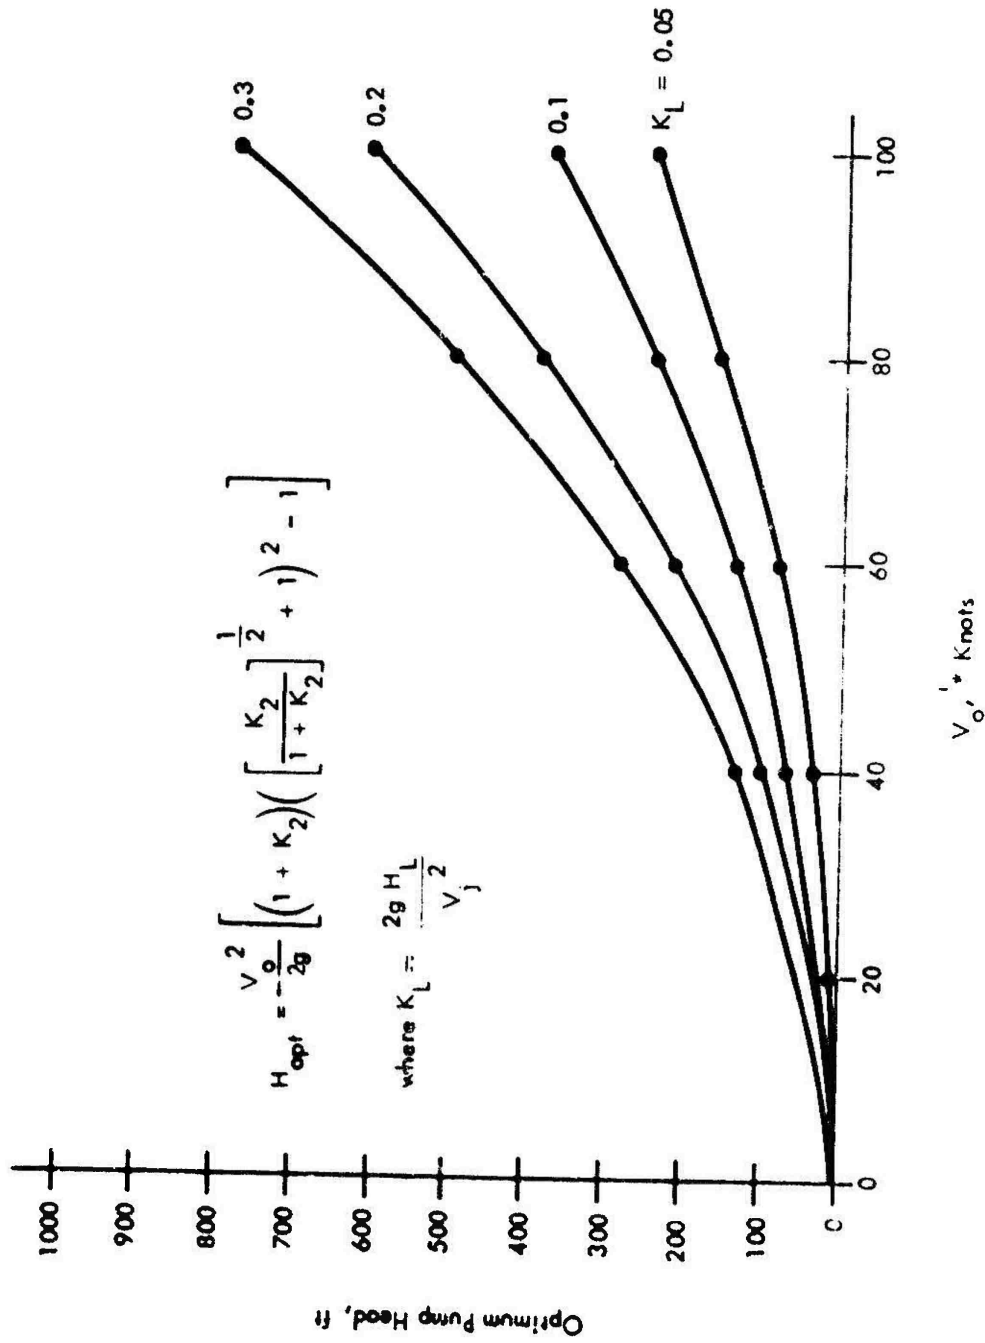


Figure 5  
Relation Between Optimum Pump Head and Ship Speed  
for a Range of Internal Energy Loss Factors (Levy Methal)

$$\eta_o = \frac{T_b V_o}{P}. \quad \dots (31)$$

The power required to propel the complete ship is  $TV_o$ . The difference between  $TV_o$  and  $T_b V_o$  is the power required to propel the propulsion system weight and to overcome the additional drag due to propulsion system appurtenances.

The overall efficiency can be divided into three elements,  $\eta_{pi}$ ,  $\eta_{pu}$ , and  $\eta_s$ , such that

$$\eta_o = \eta_{pi} \eta_{pu} \eta_s, \quad \dots (32)$$

where  $\eta_{pi}$  is the ideal propulsive efficiency as defined by Equations (5), (5a), and (6);  $\eta_{pu}$  is the pump efficiency; and  $\eta_s$  is the "system" efficiency, the definition of which will appear below.

The internal energy balance of the water-jet system requires that the net increase in energy of the water in passing through the system is equal to the energy added by the pump less the summation of internal energy losses and the difference in elevation between the mean water level and the nozzle.

$$\frac{Q\rho}{2} (V_j^2 - V_o^2) = Q\rho g (H - H_L - h),$$

or

$$V_j^2 - V_o^2 = 2g (H - H_L - h). \quad \dots (33)$$

The external energy balance requires that the net rate of increase in energy of the water, multiplied by the propulsive efficiency, is equal to the work done on the ship.

$$\eta_{pi} \frac{Q\rho}{2} (V_j^2 - V_o^2) = T_b V_o + T_d V_o. \quad \dots (34)$$

Since, from Equation (34),

$$T_b V_o = \eta_{pi} \frac{Q\rho}{2} (V_j^2 - V_o^2) - T_d V_o,$$

Equation (31) can be transformed to

$$\eta_o = \frac{\eta_{pi} \frac{Q\rho}{2} (V_j^2 - V_o^2) - T_d V_o}{P}.$$

Since, by definition,

$$P = \frac{Q \rho g H}{\eta_{pu}},$$

$$\begin{aligned} \eta_o &= \frac{\eta_{pu} \eta_{pi} \frac{Q \rho}{2} (V_j^2 - V_o^2) - \eta_{pu} T_d V_o}{Q \rho g H} \\ &= \eta_{pu} \eta_{pi} \frac{V_j^2 - V_o^2}{2gH} - \frac{\eta_{pu} T_d V_o}{Q \rho g H} \end{aligned}$$

Substituting Equation (33)

$$\eta_o = \eta_{pu} \eta_{pi} \left( \frac{H - H_L - h}{H} \right) - \frac{\eta_{pu} T_d V_o}{Q \rho g H}.$$

This can be written as

$$\eta_o = \eta_{pu} \eta_{pi} \left( 1 - \frac{H_L + h}{H} - \frac{T_d V_o}{\eta_{pi} Q \rho g H} \right). \quad \dots (35)$$

The term between the parentheses involves the various internal and external energy losses attributable to the water-jet propulsion system and can therefore appropriately be called "system" efficiency,  $\eta_s$ .

From Equation (33),

$$H = \frac{V_j^2 - V_o^2}{2g} + H_L + h.$$

Substituting this value for H in the expression for  $\eta_s$  in Equation (35),

$$\eta_s = \frac{\frac{V_j^2 - V_o^2}{2g} - \frac{H_d}{\eta_{pi}}}{\frac{V_j^2 - V_o^2}{2g} + H_L + h}. \quad \dots (36)$$

In its report, Lockheed marshalls support for the assumption that the difference between the power required to propel the actual ship and the basic ship (that is, the power required to offset the added weight and drag of the propulsion system) bears nearly a linear relationship to the weight of water passing through the system. It is also reasonable to suppose that it would be proportional to the dynamic energy of the water due to the ship speed. Thus,

$$T_d V_o = k_2 \rho g Q \frac{V_o^2}{2g}.$$

Then

$$H_d = \frac{T_d V_o}{\rho g Q} = k_1 \frac{V_o^2}{2g}.$$

$V_j^2 - V_o^2$  in Equation (36) may be written

$$V_o^2 \left[ \left( \frac{V_j}{V_o} \right)^2 - 1 \right].$$

It may be assumed that the summation of internal energy losses is proportional to the velocity head in the inlet duct,

$$H_L = k_2 \frac{V_1^2}{2g}.$$

Making these three substitutions, Equation (36) becomes

$$\eta_s = \frac{\frac{V_o^2}{2g} \left[ \left( \frac{V_j}{V_o} \right)^2 - 1 - \frac{k_1}{\eta_{pl}} \right]}{\frac{V_o^2}{2g} \left[ \left( \frac{V_j}{V_o} \right)^2 - 1 \right] + k_2 \frac{V_1^2}{2g} + h}$$



Dividing by  $V_o^2/2g$

$$\eta_s = \frac{\left(\frac{V_j}{V_o}\right)^2 - 1 - \frac{k_1}{\eta_{pl}}}{\left(\frac{V_j}{V_o}\right)^2 - 1 + k_L \left(\frac{V_1}{V_o}\right)^2 + \frac{2g h}{V_o^2}}$$

Substituting the value of  $\eta_{pl}$  from Equation (6),

$$\eta_s = \frac{\left(\frac{V_j}{V_o}\right)^2 - 1 - \frac{k_1 \left(1 + \frac{V_j}{V_o}\right)}{2}}{\left(\frac{V_j}{V_o}\right)^2 - 1 + k_2 \left(\frac{V_1}{V_o}\right)^2 + \frac{2g h}{V_o^2}} \quad \dots (37)$$

From Equation (32)

$$\eta_o = \eta_{pl} \eta_{pu} \eta_s$$

and from Equation (6)

$$\eta_{pl} = \frac{2}{1 + \frac{V_j}{V_o}}$$

Substituting the value of  $\eta_{pl}$  in Equation (6) in Equation (32),

$$\eta_o = \frac{2 \eta_{pu}}{1 + \frac{V_j}{V_o}} \eta_s \quad \dots (38)$$

Substituting the value of  $\eta_s$  from Equation (37) in (38),

$$\eta_o = 2 \eta_{pu} \frac{\left(\frac{V_j}{V_o}\right) - 1 - \frac{k_1}{2}}{\left(\frac{V_j}{V_o}\right)^2 - 1 + k_2 \left(\frac{V_j}{V_o}\right) + \frac{2gh}{V_o^2}} \quad \dots (39)$$

By differentiating the variable,  $V_j/V_o$  (treating all other values as constants), setting the result equal to zero, and solving for  $V_j/V_o$ , the optimum value providing the highest overall efficiency can be determined. This operation is simplified if the constant terms in the numerator and denominator of Equation (39) are collected as follows:

$$C_1 = 1 + \frac{k_1}{2}$$

$$C_2 = k_2 \left(\frac{V_j}{V_o}\right)^2 + \frac{2gh}{V_o^2} - 1.$$

Then

$$\eta_o = 2 \eta_{pu} \frac{\frac{V_j}{V_o} - C_1}{\left(\frac{V_j}{V_o}\right)^2 + C_2} \quad \dots (40)$$

Differentiating and solving for  $V_j/V_o$  opt,

$$\frac{V_j}{V_o \text{ opt}} = C_1 + \sqrt{C_1^2 + C_2} \quad \dots (41)$$

Substituting this value of  $V_j/V_o$  opt in Equation (40),

$$\eta_o \left(\text{opt. } \frac{V_j}{V_o}\right) = 2 \eta_{pu} \frac{C_1 + \sqrt{C_1^2 + C_2} - C_1}{\left(C_1 + \sqrt{C_1^2 + C_2}\right)^2 + C_2}$$

Expanding the denominator, this becomes

$$\eta_o \left( \frac{V_j}{V_o} \right)_{opt} = 2 \eta_{pu} \frac{\sqrt{C_1^2 + C_2}}{2 C_1 \sqrt{C_1^2 + C_2} + 2 C_1^2 + 2 C_2} \quad \dots (42)$$

Factoring the denominator,

$$\begin{aligned} \eta_o \left( \frac{V_j}{V_o} \right)_{opt} &= \frac{\eta_{pu} \sqrt{C_1^2 + C_2}}{\sqrt{C_1^2 + C_2} (C_1 + \sqrt{C_1^2 + C_2})} \\ &= \frac{\eta_{pu}}{C_1 + \sqrt{C_1^2 + C_2}} \\ &= \frac{\eta_{pu}}{\left( \frac{V_j}{V_o} \right)_{opt}} \quad \dots (43) \end{aligned}$$

Recalling that  $\eta_o = \eta_{pu} \eta_{pi} \eta_s$ , and substituting the value of  $\eta_o \left( \frac{V_j}{V_o} \right)_{opt}$  from Equation (43) and the value of  $\eta_{pi}$  from Equation (6),

$$\frac{\eta_{pu}}{\left( \frac{V_j}{V_o} \right)_{opt}} = \frac{2 \eta_{pu} \eta_s}{1 + \left( \frac{V_j}{V_o} \right)_{opt}}$$

Solving for  $\left( \frac{V_j}{V_o} \right)_{opt}$  ..... (44)

$$\frac{V_j}{V_o} \left( opt \right) = \frac{1}{2 \eta_s - 1}$$

There are four principal variables involved in the determination of the overall efficiency and optimum  $V_j/V_0$  ratio. These are the propulsion system drag coefficient ( $k_1$ ), the internal energy loss coefficient ( $k_2$ ), the inlet velocity ratio ( $V_i/V_0$ ), and the elevation of the nozzle above the mean water level ( $h$ ). An additional factor, the boundary layer, is not included and should be investigated to see how it might be taken into consideration.

The effect of variation of these four variables over a range is shown in Figures 6 through 9. The main difference between these curves and those resulting from plotting the equations of Johnson and Levy, Figures 1 and 2 is due to incorporation of the concept of the basic ship and charging against the propulsion system the power required to overcome the added drag due to the propulsion system. This has the effect of both lowering and flattening the tops of the curves and moving the optimum  $V_j/V_0$  ratio to higher values.

Both Johnson and Levy indicate in their papers that it may be desirable to raise the  $V_j/V_0$  ratio above the theoretical optimum in order to save weight. The Lockheed approach permits exact numerical calculation of the new optimum, provided the propulsion system drag can be calculated.

Figure 10 is a plot of optimum pump head at various cruising speeds, using several combinations of loss factors,  $k_1$  and  $k_2$ . This figure is based on use of optimum  $V_j/V_0$  ratio for each speed and loss factor from equation (41) and the following relationship:

$$H = \frac{V_j^2}{2g} + H_L + h - \frac{V_0^2}{2g},$$

with

$$H_L = k_2 \frac{V_i^2}{2g}.$$

#### 4.0 WATER-JET PUMPS

The limiting factor on pump design will in all probability be cavitation. A commonly used measure of cavitation tendency is suction specific speed,  $S$ , which is defined as

$$S = \frac{7 \sqrt{Q}}{(H_{BV})^{3/4}}$$

USN MARINE ENGINEERING LABORATORY

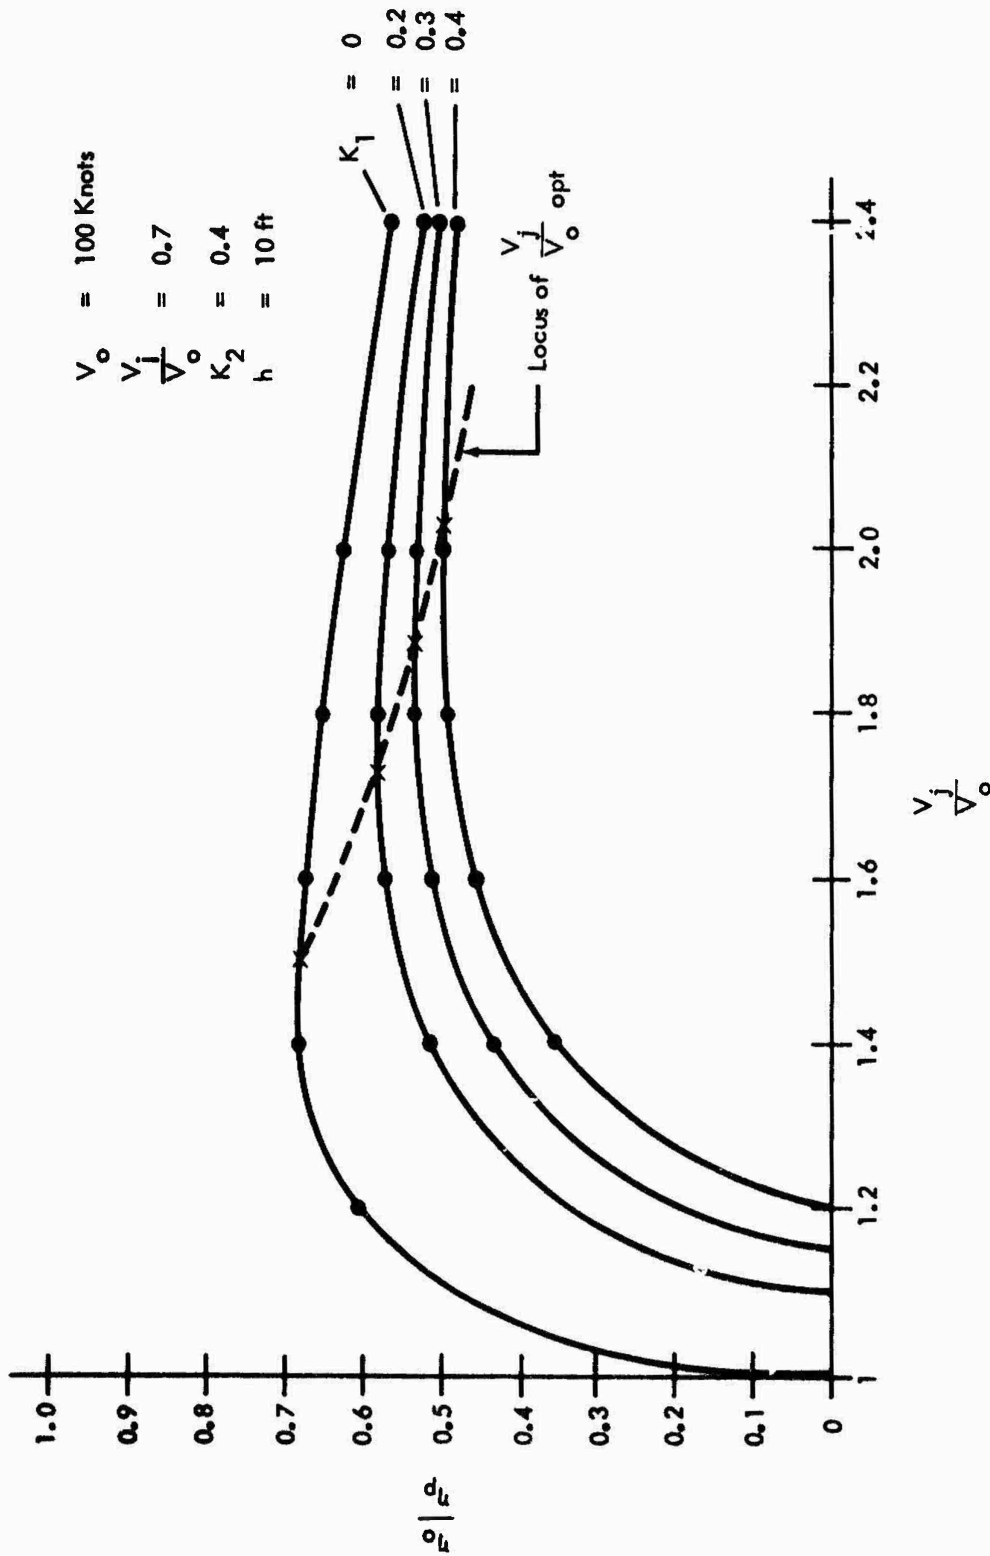


Figure 6  
 Relation Between Propulsion Efficiency and Propulsion System Drag (Lockheed Method)

USN MARINE ENGINEERING LABORATORY

MEL Technical Memorandum 484/66

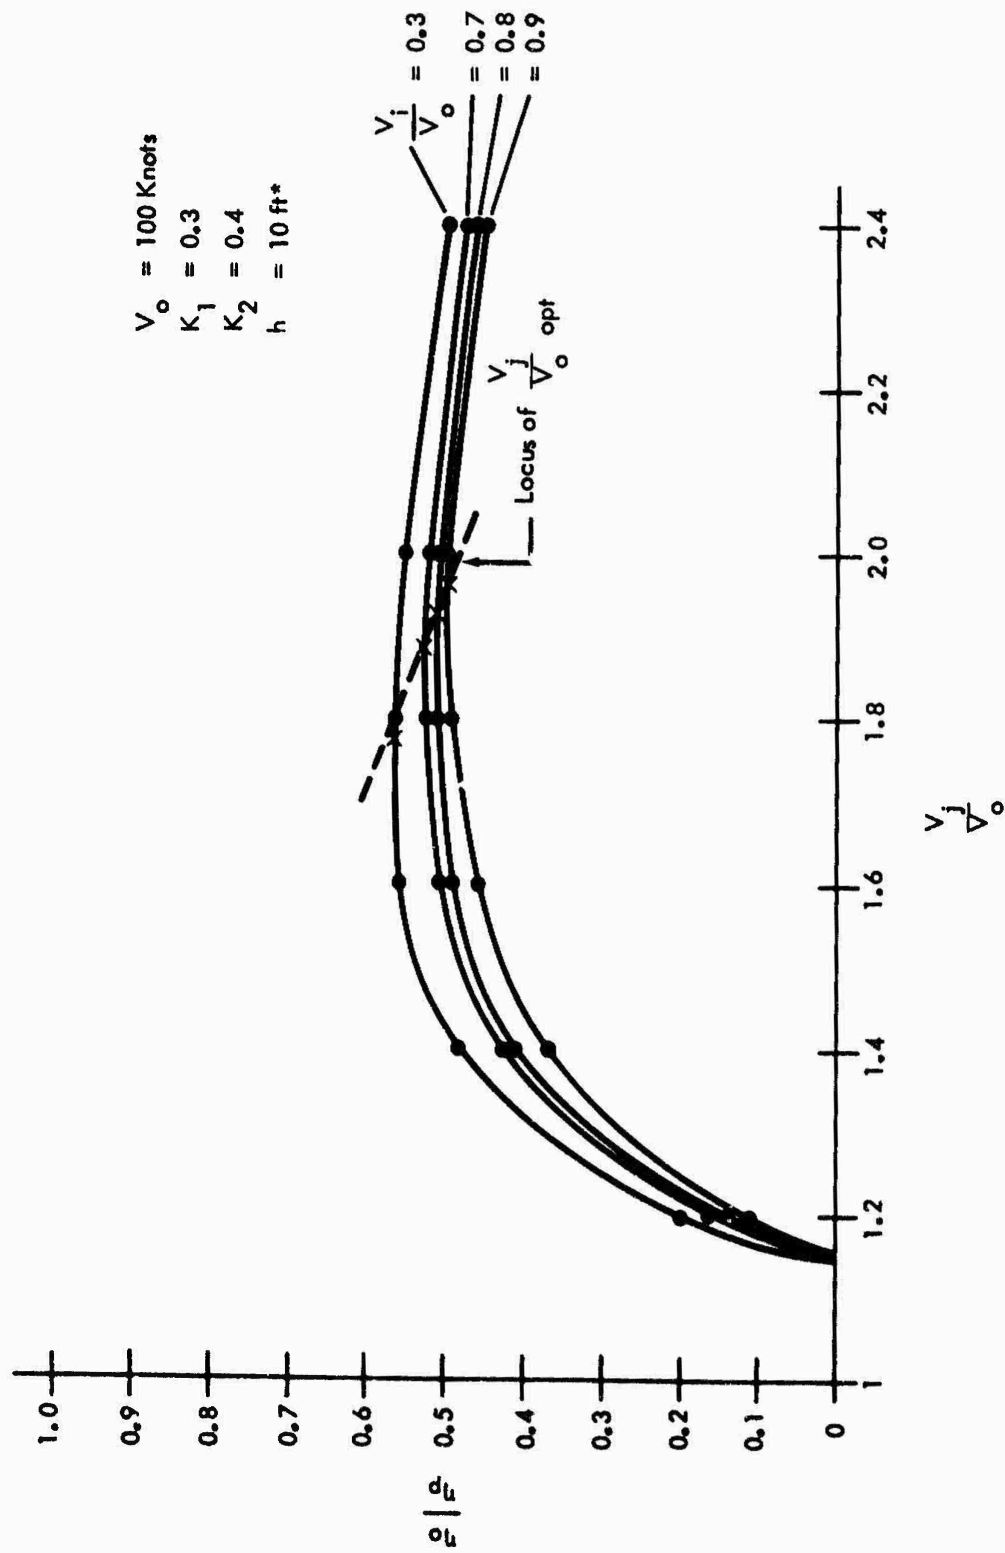


Figure 7  
Effect of inlet Velocity Ratio on Overall Efficiency (Lockheed Method)

USN MARINE ENGINEERING LABORATORY

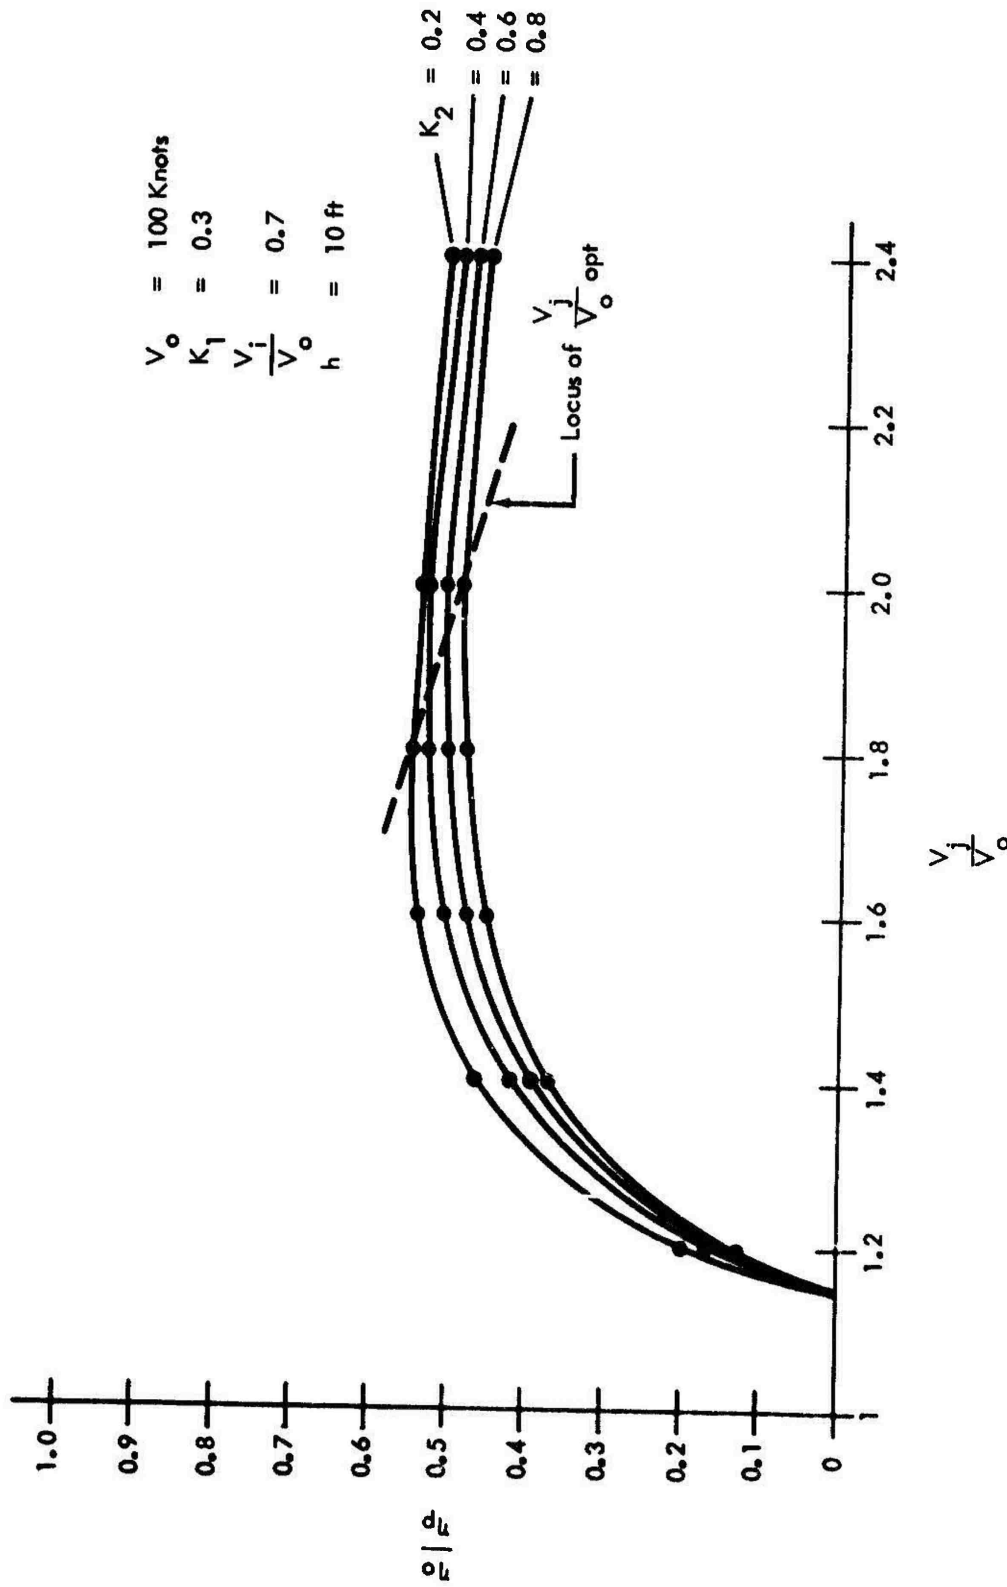


Figure 8  
Effect of Internal Loss Factor or Overall Efficiency (Lockheed Method)

USN MARINE ENGINEERING LABORATORY

$K_1 = 0.2$  (Propulsion system drag factor)  
 $K_2 = 0.2$  (Internal loss factor)  
 $\frac{V_i}{V_o} = 0.3$  (Inlet velocity ratio)  
 $h = 5$  feet (Elevator of nozzle)

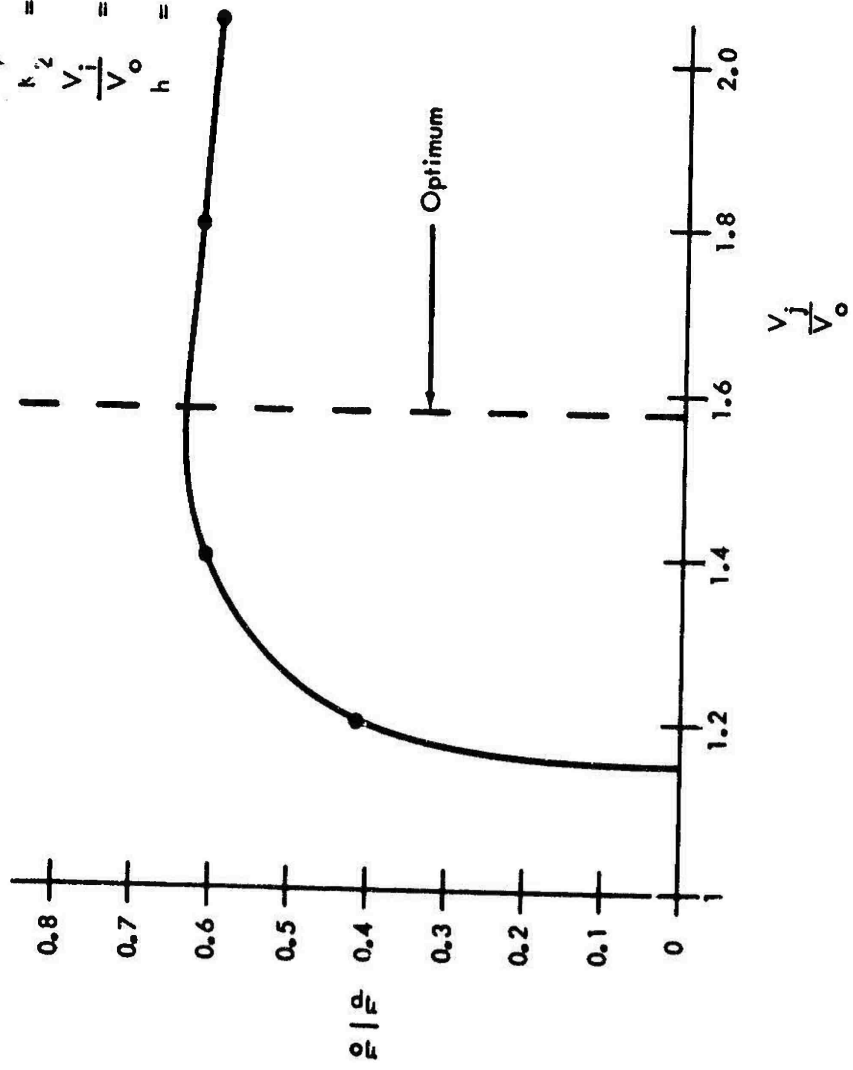


Figure 9  
Efficiency of Optimum System at Various  $V_j/V_o$  Ratios



USN MARINE ENGINEERING LABORATORY

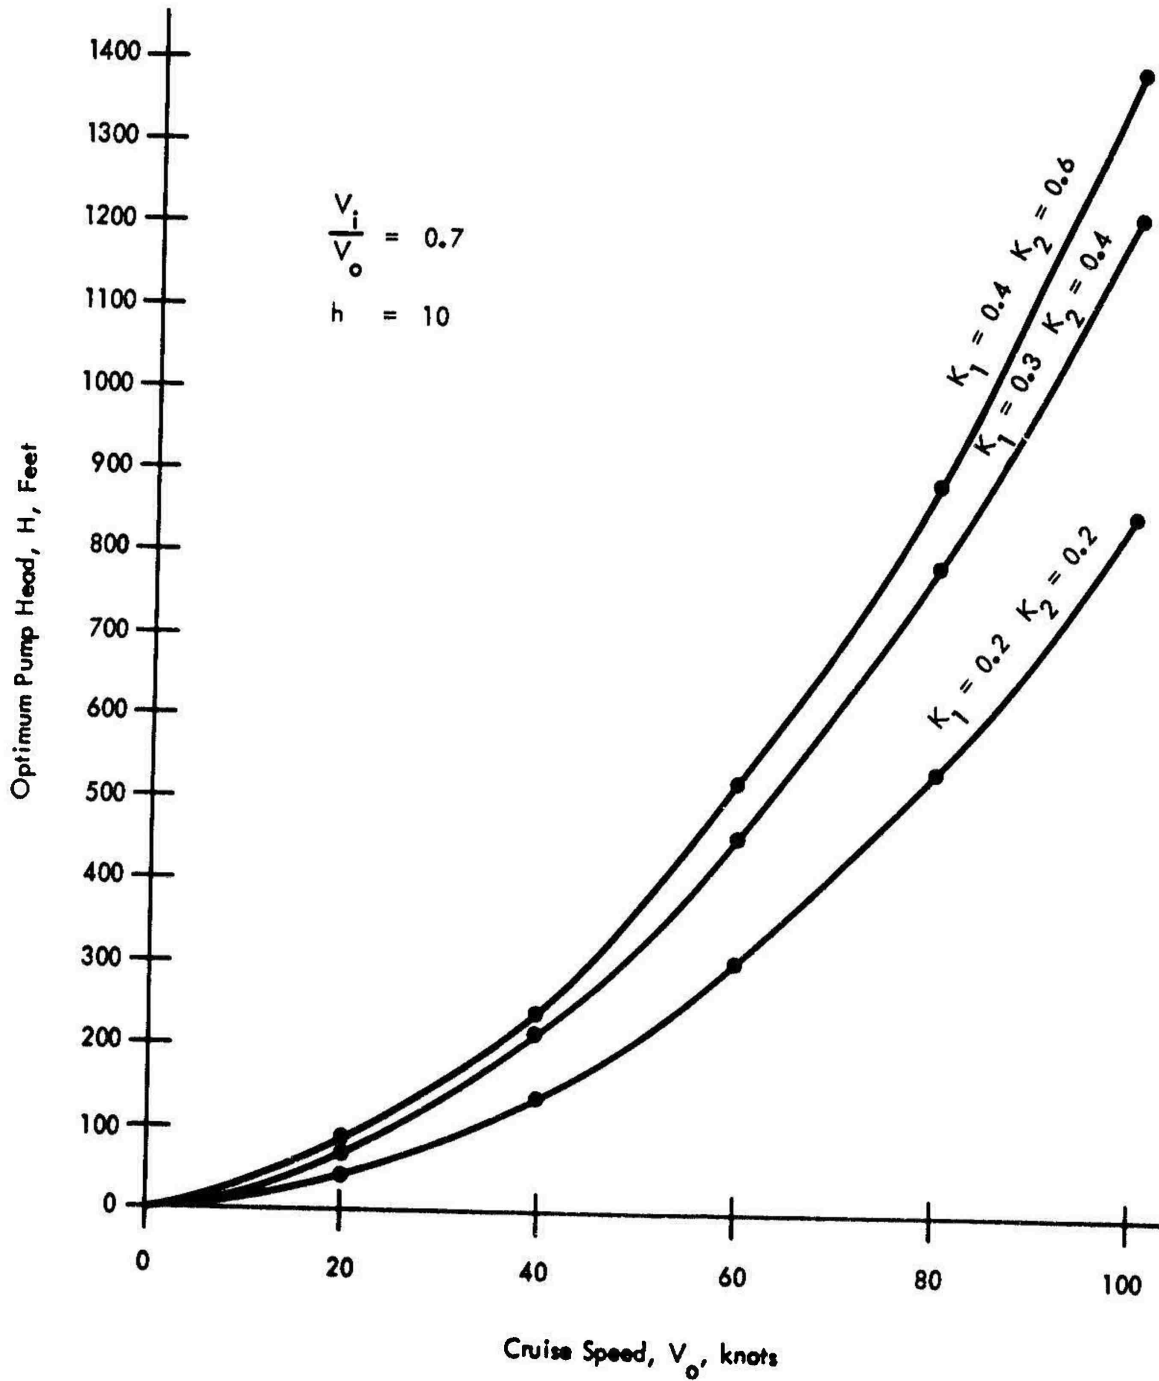


Figure 10  
 Relation Between Optimum Pump Head and  
 Ship Speed for a Range of Loss Factors (Lockheed Method)

where

$n$  = Impeller revolution per minute.

$Q$  = Discharge, gallons per minute.

$H_{sv}$  = Net positive suction head.

As applied to conventional double-suction centrifugal pumps, a value of  $S$  of 12,000 is found to be about the upper limit of cavitation-free operation. Thus,

$$\frac{n \sqrt{Q}}{(H_{sv})^{\frac{3}{4}}} = 12,000$$

or

$$n \sqrt{Q} = 12,000 (H_{sv})^{\frac{3}{4}}. \quad \dots (45)$$

Using the conventional definition of pump specific speed,

$$N_s = \frac{N \sqrt{Q}}{H^{\frac{3}{4}}},$$

and substituting the cavitation-limited value of  $n \sqrt{Q}$  from Equation (45), the limiting value of  $N_s$  is

$$N_s = 12,000 \left( \frac{H_{sv}}{H} \right)^{\frac{3}{4}}. \quad \dots (46)$$

4.1 As applied to hydrofoils, and probably also to surface effect ships, it may be assumed that the maximum thrust of a water-jet system will be required at the hump transition, when the ship speed is third or half the value of  $V_0$  at cruising speed. In order to provide this thrust, head and flow rate must be maintained at about the same level at hump and cruising speeds. Since the net positive suction head will be lower at hump speed than at cruising speed, pump cavitation tendency will be greatest at hump speed.

4.2 The net positive suction head ( $H_{SV}$ ) is the sum of the atmospheric pressure head plus the ram pressure head (reduced by internal friction and diffusion pressure losses), less the water vapor pressure head and the elevation of the pump above the water level outside the hull. If hump speed is half  $V_o$ ,  $H_g^v$  (using the approach of reference 1) will be approximately

$$33 + (1 - k) \left( \frac{1}{4} \right) \left( \frac{V_o^2}{2g} \right) - h.$$

Substituting this value in Equation (46),

$$N_s = 12000 \left[ \frac{33 + (1 - k) \frac{1}{4} \left( \frac{V_o^2}{2g} \right) - h}{H} \right]^{\frac{3}{4}}$$

Remembering that  $K = k + 2gh/V_o^2$ ,

$$N_s \cong 12000 \left[ \frac{33 + \frac{V_o^2}{8g} (1 - K)}{H} \right]^{\frac{3}{4}} \dots (47)$$

It will be noted that the internal energy loss calculated by this equation is a fourth that at cruising speed. Since the head and flow are to be approximately the same as at cruise, it seems reasonable to suppose that the internal energy losses would remain about the same. Accordingly, the present reviewer suggests that Equation (47) be modified to

$$N_s \cong 12000 \left[ \frac{33 + \left( \frac{1}{4} - K \right) \frac{V_o^2}{2g}}{H} \right]^{\frac{3}{4}} \dots (48)$$

This would, of course, lead to a somewhat lower cavitation-limited value of  $N_s$  than Equation (47). In Figure 11, Equation (48) is plotted to show the relation between  $N_s$  and  $V_o$  for various  $K$  factors. For these curves, the optimum head is taken from Figure 3 for each  $V_o$  and  $K$ .

USN MARINE ENGINEERING LABORATORY

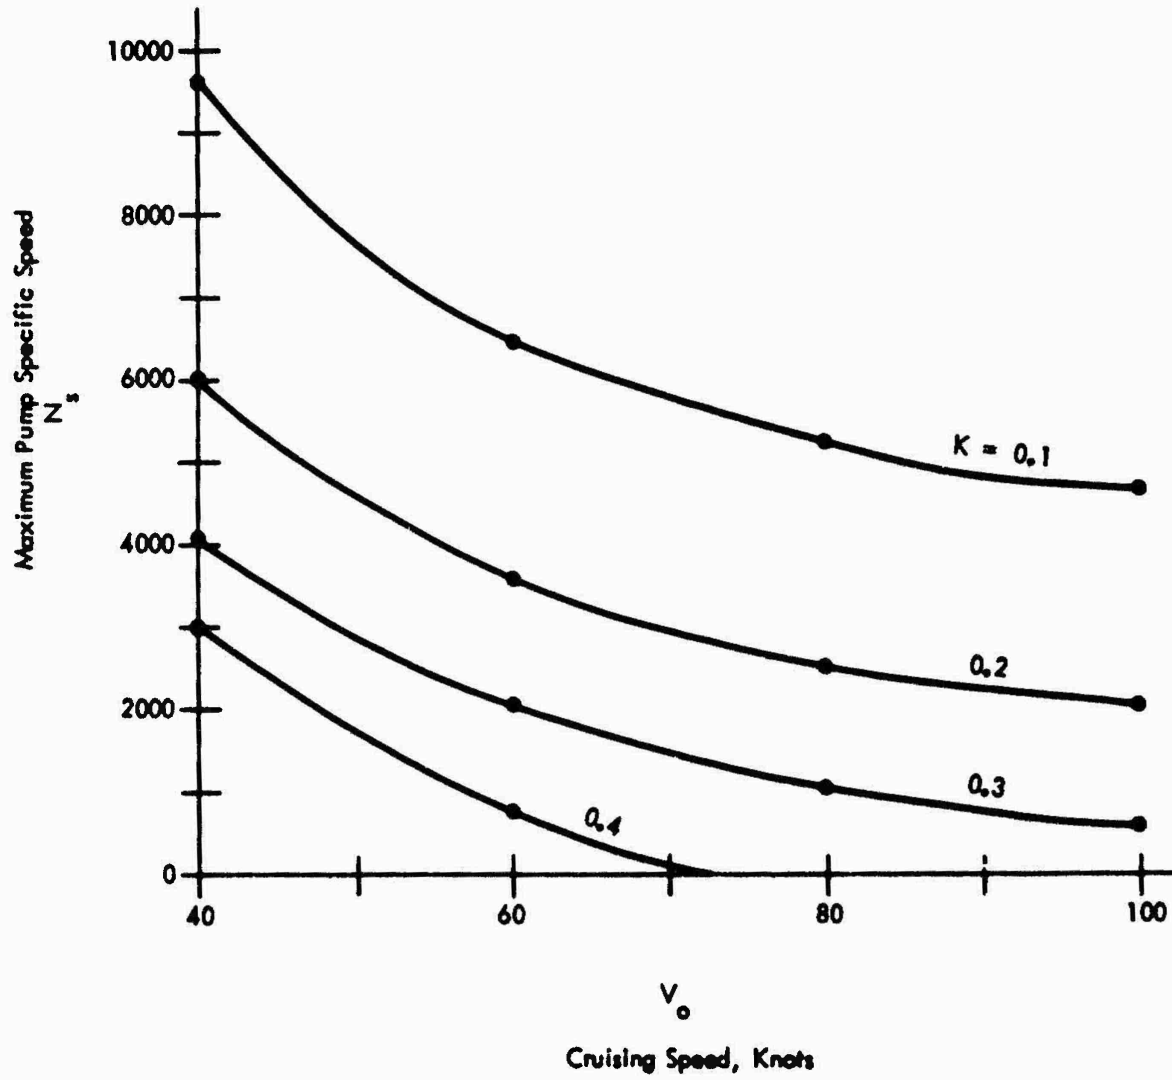


Figure 11  
Maximum Pump Specific Speed as Limited by Cavitation

According to Stepanoff data,<sup>4</sup> based on analysis of a large number of centrifugal pumps, large-flow centrifugal pumps have achieved maximum efficiency when designed for specific speeds in the range 2500 - 3000. The curves of Figure 11 show that if the criteria assumed are correct (same head and flow at hump speed as at cruising speed and maximum suction specific speed limited to 12,000) for a ship designed to cruise at 100 knots, the loss factor must be below 0.2 if highest efficiency pumps are to be used.

4.3 Since the Lockheed approach leads to somewhat higher (but probably more nearly correct) values of optimum pump head than the methods of Johnson and Levy, cavitation limits will be more severe, particularly during hump transition. It may be of interest to look at a conventional pump system, optimized for the cruise condition, and then consider the operating conditions for the hump transition. At cruise speed,

$$H_{sv} = 33 + \frac{V_o^2}{2g} - k_2 \frac{V_1^2}{2g} - h. \quad \dots (49)$$

If h is taken as 10 feet and  $V_1/V_o$  as 0.7, Equation (49) becomes

$$H_{sv} = 23 + (1 - 0.7 k_2) \frac{V_o^2}{2g}. \quad \dots (50)$$

Using Equation (46),

$$\text{Maximum } N_s = \frac{12000 \left[ 23 + \left( 1 - 0.7 k_2 \right) \frac{V_o^2}{2g} \right]^{\frac{3}{4}}}{H^{\frac{3}{4}}}. \quad \dots (51)$$

Figure 12 is a plot of maximum  $N_s$  for low, medium, and high loss factors for various cruising speeds. For these curves, the optimum pump head for each loss factor and speed is taken from Figure 10. This shows pump specific speeds at 100 knots as being limited to 3000 - 7000, depending on system losses. These values are, however, based on the conventional practice with double-suction centrifugal pumps of limiting suction specific speed to 12,000. In an axial-flow pump, particularly if special designs involving inducers or the equivalent are employed, this value would be greatly increased.

USN MARINE ENGINEERING LABORATORY

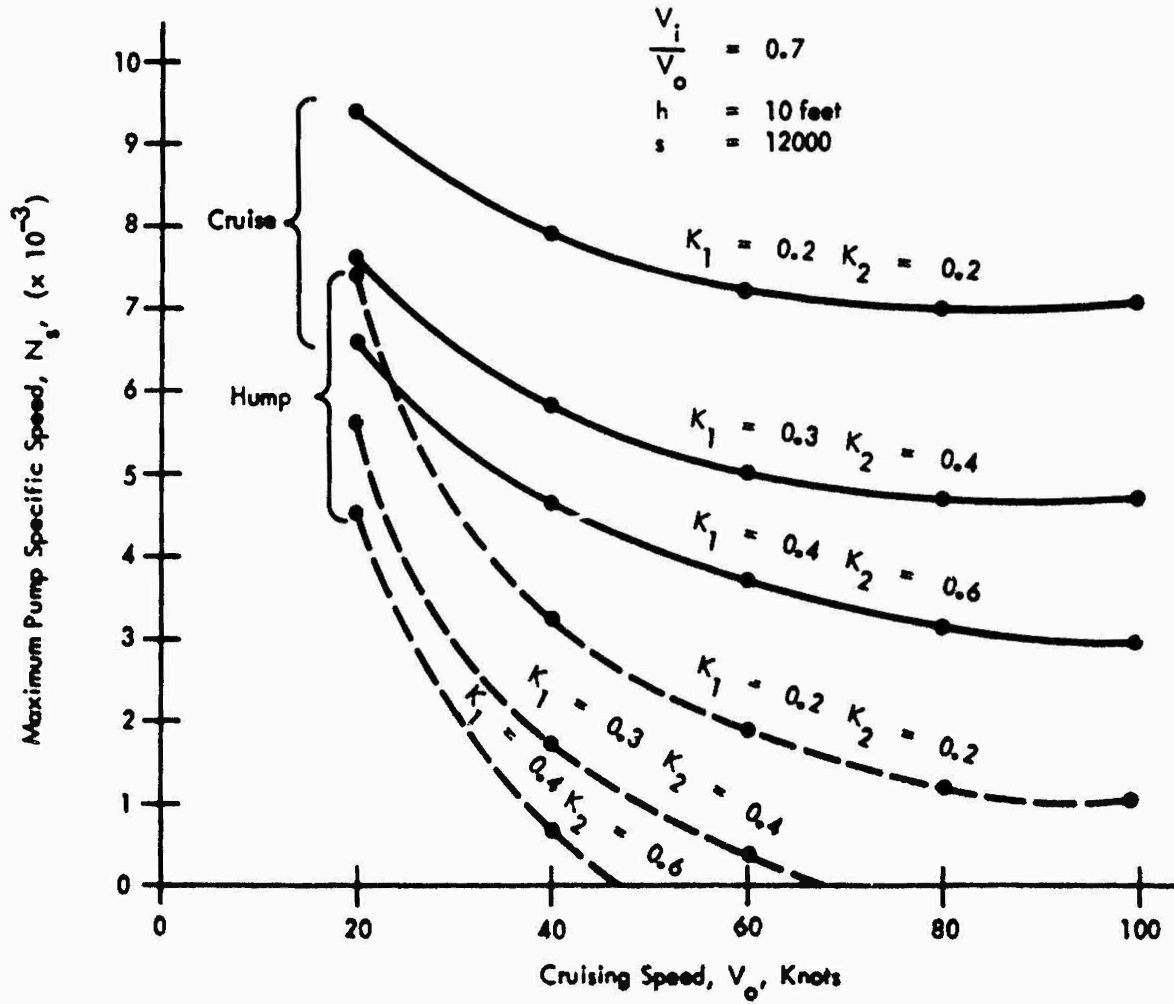


Figure 12  
Cavitation Limit on Maximum Specific Speed at Cruising Speed

The real cavitation problem, however, lies in traversing the hump region. This is because the thrust requirements here are nearly as high as, or possibly even higher than, at cruise speed, but the net positive suction head available, being nearly proportional to the square of the speed, is very much lower. Figure 12 also shows curves of maximum specific speed at the hump transition assuming that hump speed is 40 percent of  $V_0$  and using the same cavitation criterion of 12,000 suction specific speed. For these calculations, the ship thrust-speed characteristics of Figure 13 are used, which show hump thrust and flow conditions essentially the same as at cruise speed.

At hump speed,

$$H_{sv} = 33 + \frac{(f V_0)^2}{2g} - H_L - h,$$

where  $f$  is the fraction of cruising speed ( $V_0$ ) represented by hump speed, and

$$H_L = K_L \frac{V_1^2}{2g}.$$

The resulting cavitation limits for pumps optimized for different loss ratios and cruising speeds are shown as dashed lines in Figure 12. It will be observed that, if the configuration of the inlet, ducts, and nozzles remains the same at hump speed as at cruise, the flow rate required to provide the necessary thrust cannot be secured except with very efficient inlets and ducts, or the net positive suction head otherwise falls to zero due to inlet losses. Therefore, it appears likely that either the inlet will have to be enlarged, or the nozzle constricted, or both at the hump condition, in order to increase the net positive suction head on the pump.

4.4 The widely reproduced chart of Stepanoff (Figure 5.1 in reference 4, page 76) indicates, on the basis of analysis of a large number of pump design, optimization of efficiency at a specific speed around 3000 for very large flow pumps. The optimum conventional impeller form for such a pump would be a so-called "Francis" type, where the flow is more nearly radial than axial. From Figure 12 it appears that as a "first cut" pump for a large surface effect ship, a specific speed of about 3000 would be appropriate, with suitable inlet and nozzle variation to provide a reasonable positive suction head at hump speed. It would undoubtedly be necessary to operate the pump in a cavitating condition during transit of the hump if the hump is in fact as pronounced as shown by Chaplin and Ford.<sup>5</sup>

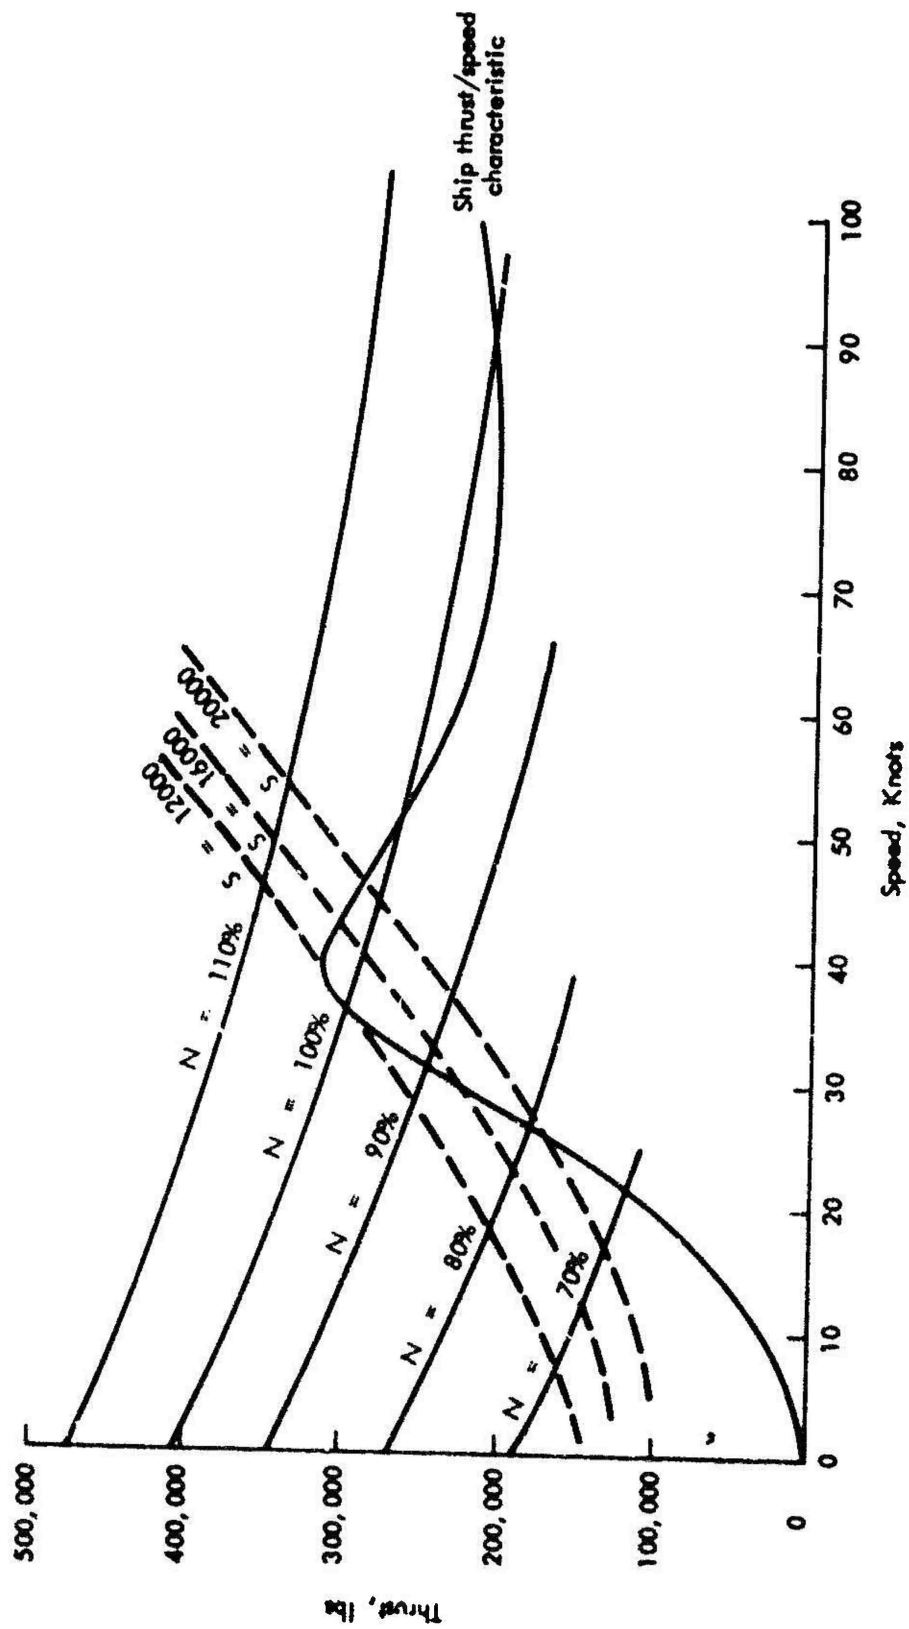


Figure 13  
Thrust Provided at Various Pump Speeds Ship Drag-Speed Relation



5.0 PERFORMANCE MAPS

Levy<sup>2</sup> shows two types of performance maps which are useful in matching pump characteristics to vessel characteristics. In one, the coordinates are head and capacity ratios; in the other, the coordinates are thrust and speed.

For the system head-capacity ratio chart, it is noted that Q is related to V<sub>j</sub> in the following manner:

$$Q = V_j A_j,$$

or

$$V_j = \frac{Q}{A_j}, \quad \dots (52)$$

Where A<sub>j</sub> is the cross-sectional area of the jet at the maximum velocity section.

From Equation (28), the head required to be supplied by the pump is equal to the jet velocity head plus the internal energy losses, less the velocity head resulting from the forward motion of the ship.

$$H = (1 + k_L) \frac{V_j^2}{2g} - \frac{V_o^2}{2g}.$$

Substituting the value of V<sub>j</sub> from Equation (52),

$$H = \left( \frac{1 + k_L}{A_j} \right) \frac{Q^2}{2g} - \frac{V_o^2}{2g}.$$

Rearranging,

$$Q = \left( \frac{2gH + V_o^2}{\frac{1 + k_L}{A_j}} \right)^{\frac{1}{2}}.$$

The ratio of flow at two different pump heads is then

$$\frac{Q_2}{Q_1} = \left( \frac{2gH_2 + V_o^2}{2gH_1 + V_o^2} \right)^{\frac{1}{2}} \quad \dots (53)$$

If  $H_1$  and  $Q_1$  are the design point head and flow rate, the  $Q_2/Q_1$  ratio for any other pump head can be calculated from Equation (53) for any speed. A series of curves similar to those shown in Figure 14 result.

Typical pump characteristics can be superimposed on the same coordinates, as shown in Figure 14. Then, if the thrust required for any selected vessel speed is known, and the pump speed required to produce this thrust is also known, the operating point in Figure 14 for any vessel speed can be found.

The pump speed required to produce a certain thrust can be computed as follows, if the pump characteristics, as shown in Figure 14, are known:

From Equation (23),

$$H = (1 + k_L) \frac{V_j^2}{2g} - \frac{V_o^2}{2g}$$

Rearranging,

$$V_j = \left( \frac{2gH + V_o^2}{1 + k_L} \right)^{\frac{1}{2}} \quad \dots (54)$$

From Equation (1),

$$T = \rho Q (V_j - V_o)$$

USN MARINE ENGINEERING LABORATORY

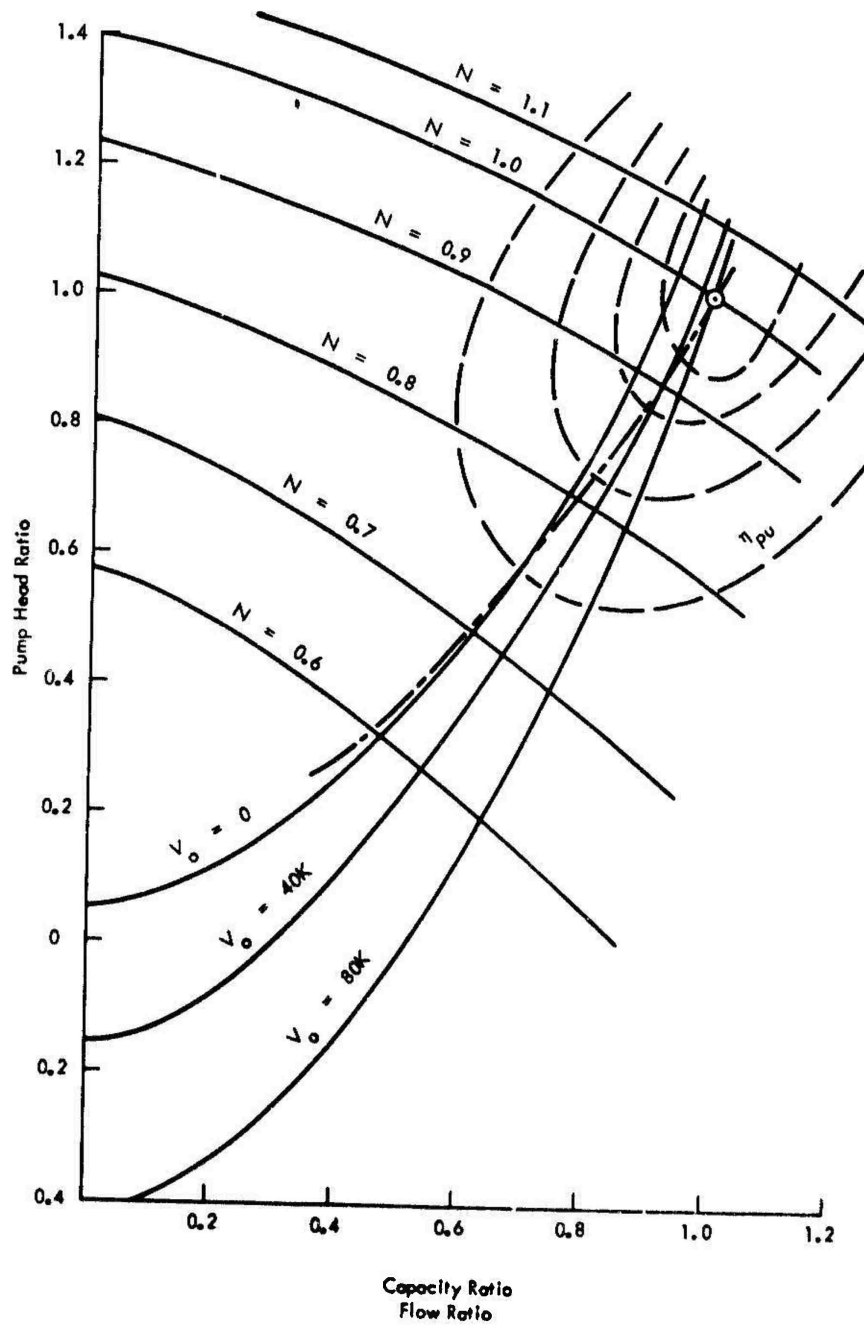


Figure 14  
Relation Between Pump and System Flow Characteristics

Substituting the value of  $V_j$  from Equation (54) into (1),

$$T = \rho Q \left[ \left( \frac{2gH + V_o^2}{1 + k_L} \right)^{\frac{1}{2}} - V_o \right]. \quad \dots (55)$$

Since Figure 14 provides  $Q$  and  $H$  for any selected pump speed, all of the values necessary to compute thrust from Equation (55) are known.

Figure 13 shows the sort of curves which would result for a typical installation.

A curve of vessel drag in relation to speed can be superimposed on the same coordinates. A typical curve for a surface effect ship is shown in Figure 13. By finding the pump speed to produce a certain ship speed from Figure 13, the pump operating point can be directly located in Figure 14.

The cavitation point, assuming this to be a function of suction specific speed, can also be shown in Figure 13. Typical values for three different values of suction specific speed are shown.

## 6.0 DISCUSSION

It would appear that the Lockheed approach, by taking into account the effect on the optimum jet velocity ratio of differences in the weight and drag characteristics of alternative propulsion systems, affords a more useful approach to system design than those of Johnson and Levy. Also, relating internal energy losses to the inlet velocity, rather than to the vessel velocity or the jet velocity, seems more realistic. Even so, the various  $k$  factors must be used with considerable caution. Relating inlet and duct losses to  $V_i^2/2g$  is an obvious oversimplification. (Actually in the Lockheed study, a more direct approach of calculating and adding the individual sources of loss through the system is taken. The oversimplification is due to the effort of the present writer to indicate principles rather than details.)

In particular, use of  $V_i$  as the measure of internal energy losses tends to mask the effect of diffuser losses in relation to duct wall friction losses, which may in some cases trend in opposite directions. For example, with a given flow rate, increased diffusion will reduce frictional losses, due to reduced duct velocity; but this saving will be partially offset by the loss in the diffusion process. Diffusion losses in this sense are not correctly accounted for in the equations presented here, and differences in inlet velocity ratio probably have less effect than shown in Figure 7.

## 7.0 FUTURE PLANS

In support of the Surface Effects Ship Program, further studies will be carried forward along lines of:

7.1 Estimating the specific characteristics of surface effect ship water-jet systems based on use of conventional pumps of around 3000 specific speed suitable for use with the Pratt & Whitney FT-4A engine in a 4000-ton water-jet ship.

7.2 Similar estimates with respect to the 500-ton prototype ship.

7.3 Preliminary layout and weight estimates of the machinery plant for the 4000- and 500-ton ships.

7.4 Refinement of propulsion system drag and internal loss estimates in order to identify optimum pump characteristics with greater certainty. This will include quantifying the various loss coefficients and also developing better methods of taking into consideration the effects on required pump characteristics of diffuser losses and boundary layer ingestion.

7.5 Development of optimum nonconventional pump designs.

## Appendix A

## Nomenclature

$$C_1 - 1 + \frac{k_1}{2}$$

$$C_2 - k_2 \left( \frac{V_i}{V_o} \right)^2 + \frac{2gh}{V_o^2} - 1$$

$g$  - Acceleration of gravity,  $\text{fps}^2$

$h$  - Difference in elevation between nozzle and mean water level, ft

$H$  - Energy added to water by pump, ft-lb/lb

$H^*$  - Ratio of energy added to water by pump to kinetic energy of water due to ship forward motion ( $V_o^2/2g$ ), nondimensional

$H_d$  - Energy expended to overcome drag of propulsion system, ft-lb/lb

$H_L$  - Summation of internal energy losses, ft-lb/lb

$H_{sv}$  - Net positive suction head, ft-lb/lb

$k$  - Ratio of internal energy losses to entering kinetic energy, nondimensional

$K$  -  $k + \frac{2gh}{V_o^2}$ , nondimensional

$k_L$  - Ratio of internal energy losses to jet kinetic energy, nondimensional

$k_1$  - Ratio of power required to overcome propulsion system drag, to product of water flow rate and kinetic energy, nondimensional

$k_2$  - Ratio of internal energy losses to velocity head in inlet duct, nondimensional

$n$  - Pump revolutions per minute

$N_s$  - Pump specific speed,  $\frac{n \sqrt{\text{GPM}}}{H^{\frac{3}{4}}}$

$\eta$  - Propulsive efficiency x pump efficiency

MEL Technical Memorandum 484/66

- $\eta_p, \eta_{pu}$  - Pump efficiency
- $\eta_{pi}$  - Ideal propulsive efficiency
- $\eta_o$  - Overall efficiency,  $\eta_{pu} \eta_{pi} \eta_s$
- $\eta_s$  - System efficiency
- P - Shaft power applied to pump, ft-lb/sec
- Q - Water flow, ft<sup>3</sup>/sec  
In pump specific speed formulae, water flow, gpm
- r -  $\frac{V_j - V_o}{V_o}$ , nondimensional
- $\rho$  - Water density, slugs/ft<sup>3</sup>, lb-sec<sup>2</sup>/ft<sup>4</sup>
- S - Pump suction specific speed,  $\frac{h \sqrt{GPM}}{(H_{sv})^{\frac{3}{4}}}$
- T - Total drag of ship = thrust of propulsive system, lb
- $T_b$  - Drag of basic ship without propulsion system, lb
- $T_d$  - Drag attributable to propulsion system, lb
- $V_i$  - Inlet water velocity relative to ship, fps
- $V_j$  - Jet velocity relative to ship, fps
- $V_o$  - Approaching water velocity, relative to ship = ship forward velocity, at cruising speed, fps
- $\Delta V$  -  $V_j - V_o$ , fps

Appendix B

Technical References

- 1 - Johnson, Virgil E., Jr., "Water Jet Propulsion for High Speed Hydrofoil Craft,"  
AIAA, 29 Jun - 2 Jul 1964
- 2 - Levy, Joseph, "The Design of Water-Jet Propulsion Systems for Hydrofoil Craft,"  
SNAME, 14 May 1964
- 3 - "Waterjet Propulsion System Study," Lockheed California Co., rept under  
Contract NObs-88605, 1965
- 4 - Stepanoff, A. J., Centrifugal and Axial Flow Pumps, John Wiley & Sons, Inc.,  
1957
- 5 - Chaplin, Harvey, and Allen Ford, Preliminary Draft of Design Principles  
of Ground Effect Machines, Section H, Supplement 2, Performance Graphs,  
May 1965



Unclassified

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) US Navy Marine Engineering Laboratory Annapolis, Maryland		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE Comparison of Three Theories of Water-Jet Propulsion			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Research and Development Report			
5. AUTHOR(S) (First name, middle initial, last name) Garrett, J. H.			
6. REPORT DATE February 1967		7a. TOTAL NO. OF PAGES 41	7b. NO. OF REFS 5
6a. CONTRACT OR GRANT NO.		8a. ORIGINATOR'S REPORT NUMBER(S) 484/66	
b. PROJECT NO.		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) 55 501	
c.			
d.			
10. DISTRIBUTION STATEMENT Distribution of this document is unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY NAVSHIPS	
13. ABSTRACT <p>The three different approaches to derivation of formulae expressing the relations among speed, thrust, power, and efficiency of water-jet propulsion systems, as developed by Lockheed California Company; Virgil Johnson of Hydronautics, Incorporated; and Joseph Levy of Aerojet-General Corporation, are summarized and compared. Certain modifications and simplifications are incorporated, and terminology is modified as necessary to facilitate comparison. The Lockheed system, which provides a method for including the weight and drag of the propulsion system in the optimization procedure, appears to be the more useful. The problems of compromising the performance of the propulsion system at cruising speed in order to provide reasonable hump performance are briefly discussed.</p> <p>(Author)</p>			

Unclassified

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Hydrofoil craft Ground-effect machines Water-jet propulsion Lift, thrust Drag Cavitation Mathematical basis Pumps Velocity Hump condition Cruise speed Efficiency						

Unclassified

Security Classification

<p>US Navy Marine Engineering Laboratory. Report 484/66. COMPARISON OF THREE THEORIES OF WATER-JET PROPULSION, by J. H. Garrett. February 1967. 41 pp. Figs. UNCLASSIFIED</p> <p>The three different approaches to derivation of formulae expressing the relations among speed, thrust, power, and efficiency of water-jet propulsion systems, as developed by Lockheed California Company; Virgil Johnson of Hydronautics, Incorporated; and Joseph Levy of Aerojet-General Corporation, are summarized and compared. Certain modifications and simplifications are incorporated, and terminology is modified as necessary to facilitate comparison. The Lockheed system, which provides a method for including the weight and drag of the propulsion system in the optimization</p> <p>(over)</p>	<p>1. Hydrofoil craft 2. Ground-effect machines 3. Water-jet propulsion 4. Evaluation 5. Pumps I. Garrett, J. H. II. Title... III. 484/66</p>	<p>US Navy Marine Engineering Laboratory. Report 484/66. COMPARISON OF THREE THEORIES OF WATER-JET PROPULSION, by J. H. Garrett. February 1967. 41 pp. Figs. UNCLASSIFIED</p> <p>The three different approaches to derivation of formulae expressing the relations among speed, thrust, power, and efficiency of water-jet propulsion systems, as developed by Lockheed California Company; Virgil Johnson of Hydronautics, Incorporated; and Joseph Levy of Aerojet-General Corporation, are summarized and compared. Certain modifications and simplifications are incorporated, and terminology is modified as necessary to facilitate comparison. The Lockheed system, which provides a method for including the weight and drag of the propulsion system in the optimization</p> <p>(over)</p>	<p>1. Hydrofoil craft 2. Ground-effect machines 3. Water-jet propulsion 4. Evaluation 5. Pumps I. Garrett, J. H. II. Title... III. 484/66</p>
<p>procedure, appears to be the more useful. The problems of compromising the performance of the propulsion system at cruising speed in order to provide reasonable hump performance are briefly discussed.</p>	<p>UNCLASSIFIED</p>	<p>UNCLASSIFIED</p>	<p>UNCLASSIFIED</p>

US Navy Marine Engineering Laboratory.  
Report 484/66.

COMPARISON OF THREE THEORIES OF WATER-JET  
PROPULSION, by J. H. Garrett, February 1967.  
41 pp. Figs. UNCLASSIFIED

The three different approaches to derivation of formulae expressing the relations among speed, thrust, power, and efficiency of water-jet propulsion systems, as developed by Lockheed California Company; Virgil Johnson of Hydronautics, Incorporated; and Joseph Levy of Aerojet-General Corporation, are summarized and compared. Certain modifications and simplifications are incorporated, and terminology is modified as necessary to facilitate comparison. The Lockheed system, which provides a method for including the weight and drag of the propulsion system in the optimization (over)

1. Hydrofoil craft
2. Ground-effect machines
3. Water-jet propulsion
4. Evaluation
5. Pumps
- I. Garrett, J. H.
- II. Title...
- III. 484/66

UNCLASSIFIED

US Navy Marine Engineering Laboratory.  
Report 484/66.

COMPARISON OF THREE THEORIES OF WATER-JET  
PROPULSION, by J. H. Garrett, February 1967.  
41 pp. Figs. UNCLASSIFIED

The three different approaches to derivation of formulae expressing the relations among speed, thrust, power, and efficiency of water-jet propulsion systems, as developed by Lockheed California Company; Virgil Johnson of Hydronautics, Incorporated; and Joseph Levy of Aerojet-General Corporation, are summarized and compared. Certain modifications and simplifications are incorporated, and terminology is modified as necessary to facilitate comparison. The Lockheed system, which provides a method for including the weight and drag of the propulsion system in the optimization (over)

UNCLASSIFIED

procedure, appears to be the more useful. The problems of compromising the performance of the propulsion system at cruising speed in order to provide reasonable hump performance are briefly discussed.

procedure, appears to be the more useful. The problems of compromising the performance of the propulsion system at cruising speed in order to provide reasonable hump performance are briefly discussed.