

AD

Research and Development Technical Report

ECOM 66-G22-F

ANEMOCLINOMETER MEASUREMENTS OF REYNOLDS STRESS
AND HEAT TRANSPORT IN THE ATMOSPHERIC SURFACE LAYER

By

C. B. Tanner


and

G. W. Thurtell

April 1969

Distribution Statement

This document has been approved for public release
and sale; its distribution is unlimited.

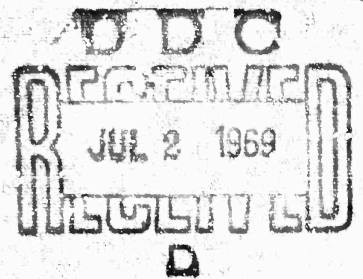

ECOM

UNITED STATES ARMY ELECTRONICS COMMAND
ATMOSPHERIC SCIENCES LABORATORY
FORT HUACHUCA, ARIZONA

Grant DA-AMC-28-043-66-022
University of Wisconsin
Madison, Wisconsin

ADDITIONAL INFO		
REPORT NUMBER		
DATE		
ORIGINATOR		
SUBJECT		
BY		
DISTRIBUTION/AVAILABILITY CODES		
DIST.	AVAIL.	SPECIAL
1		

NOTICES

Citation of trade names and names of manufacturers in this report is not to be construed as official Government endorsement or approval of commercial products or services referenced.

The findings in this report are not to be construed as an official Department of Army position unless so designated by other authorized documents.

Destroy this report when it is no longer needed. Do not return it to the originator.

TR ECOM 66-G22-F
April 1969

Reports Control Symbol
OSD-1366

ANEMOCLINOMETER MEASUREMENTS OF REYNOLDS STRESS
AND HEAT TRANSPORT IN THE ATMOSPHERIC SURFACE LAYER

FINAL REPORT

Under Grant Number DA-AMC-28-043-66-G22
DA Task No. 1T061102B53A-17

Prepared by:

C. B. Tanner, Principal Investigator
G. W. Thurtell, Co-investigator

Department of Soil Science
University of Wisconsin, Madison, Wisconsin

For

United States Army Electronics Command
Atmospheric Sciences Laboratory
Fort Huachuca, Arizona

Distribution Statement

This document has been approved for public release and sale; its distribution is unlimited.

TABLE OF CONTENTS

	Page
Preface	v
Three-dimensional pressure-sphere anemometer system -- G. W. Thurtell, C. B. Tanner, and M. L. Wesely.	1
Eddy correlation measurements of sensible heat flux near the earth's surface -- M. W. Wesely, G. W. Thurtell, and C. B. Tanner.	25
Evaporation measurements by an eddy corre- lation method -- S. M. Goltz, C. B. Tanner, G. W. Thurtell, and F. E. Jones	45
A fast response thermometer for eddy corre- lation measurements -- M. L. Wesely, G. W. Thurtell and C. B. Tanner.	61
Sensible heat flux measurements with a yaw sphere and thermometer -- C. B. Tanner and G. W. Thurtell	73

Appendices

Anemoclinometer equations and computer program	P1-P19
Coordinate systems and rotations	R1-R10
Data listing	D1-D78
Distribution list	L1-L10

PREFACE

We became interested in the anemoclinometer as a possible three-dimensional pressure-sphere anemometer in 1961 when Professor H. Lettau called it to our attention. Several features were of interest; the small size which would enable measurements near the ground, the internal angular precision of construction, and the stability and ruggedness of the probe were all valuable attributes. Most importantly, however, the vertical velocity, which is the most critical measurement, is obtained from a pressure proportional to the product of the vertical and horizontal winds. Consequently, the vertical wind is contained in a term of large magnitude, which can be measured with precision, and is then obtained by division rather than by differencing, which also lends precision to the measurement.

The early work, which validated the potential of the anemoclinometer as a three-dimensional anemometer, was supported under grant DA-SIG-36-039-62-G25 by the Atmospheric Sciences Laboratory, U. S. Army Electronics Command, Fort Huachuca, Arizona (formerly the Department of Meteorology, U. S. Army Electronics Research and Development Activity, Fort Huachuca, Arizona). This work, which included tests on frequency response, sensitivity of the anemometer to angular rotation, and a limited comparison to wind profile measurements of shear stress, was reported ^{1/} for the above

^{1/} Thurtell, G. W. and C. B. Tanner. 1965. Momentum Transport Measurement in the Atmospheric Surface Layer with the Anemoclinometer. University of Wisconsin, Department of Soil Science, Madison, Wisconsin, Final Report 1962-1965.

grant. The results also are presented by Thurtell ^{2/}.

The use of the pressure probe hinged upon a pressure measurement with severe requirements of sensitivity, zero stability, sensitivity stability and frequency response. The only pressure transducer available at that time which appeared to meet our requirements was one made by Datametrics, Inc., as described in this report and the earlier one. Datametrics was most helpful in modifying the sensor and the electronics to meet our requirements, including smaller transducer volume, distant separation of the transducer from the electronics, and read out of electrical zero and full scale.

Earlier experience with data-logging via a magnetic tape system ^{1,2/} convinced us that the only feasible route was on-line computation. This was done in the experiments discussed in this report, and proved to be as valuable as we anticipated.

Most of the results in this report were obtained as part of the 1967 Cooperative Field Experiment conducted at the University of California at Davis and sponsored by the Atmospheric Sciences Laboratory, U. S. Army Electronics Command, Fort Huachuca, Arizona. The remaining data were gathered at the University of Wisconsin Hancock Experiment Farm.

We wish to express our appreciation to Mr. T. A. Black, graduate student who worked with us on the Davis California experiment and helped also at Hancock in providing all of

^{2/} Thurtell, G. W. 1965. Momentum transport measurements in the atmospheric surface layer with the anemoclinometer. Ph.D. Thesis, Univ. Wis. (Pub. No. 65-11,179). 47 p. Univ. Microfilms, Ann Arbor, Mich. (Diss. Abstr. 1: 4017.).

the energy balance data. We owe thanks also to Dr. C. R. Stearns (Department of Meteorology, University of Wisconsin), Dr. W. O. Pruitt (Department of Water Science and Engineering, University of California-Davis), and Dr. J. A. Businger (Department of Atmospheric Sciences, University of Washington), who participated in the 1967 Cooperative Field Experiment and provided data used for independent comparisons of shear stress and sensible heat flux density.

G. W. Thurtell

C. B. Tanner

**THREE-DIMENSIONAL PRESSURE-SPHERE
ANEMOMETER SYSTEM**

G. W. Thurtell, C. B. Tanner, and M. L. Wesely

ABSTRACT

A rugged and stable pressure-sphere anemometer system is described which provides an accurate measurement of wind velocity and direction within a meter of the ground. The horizontal wind velocity, $(u^2 + v^2)^{1/2}$, agreed very closely with cup anemometer measurements, indicating good accuracy in the measurement of the dominant term, u . Eddy correlation measurements of shear stress with the pressure-sphere agreed very well with Davis shear-stress meter measurements and satisfactory agreement was found with data obtained from wind velocity profiles and from wind measurements using a drag coefficient. Ratios of σ_w/u_* during neutral periods were found to be in excellent agreement with values derived by Panofsky and Lettau, providing further indication of the accuracy obtainable with the pressure sphere system.

1. Introduction

The basic mechanisms of turbulent transport in the layers of air within a few meters of the earth's surface are receiving increasing attention from researchers from many disciplines. Inadequate diffusion models are limiting research progress in meteorology, ecology, agriculture, water resources and air pollution since many of the critical problems in these fields are associated with the exchange of energy, gases and aerosols between the earth and its atmosphere. The testing and development of improved transport models requires accurate experimental data which is at present insufficient.

Field measurements of turbulent mixing processes have been few and generally inadequate because of the stringent requirements for the instrumentation. The wind velocity sensors must be accurate, stable under field conditions, fast responding, small for measurements near the ground, rugged, and must measure both the flow direction and velocity without seriously disturbing the flow. Sonic anemometers (Kaimal, et al., 1964; Kaimal, et al., 1968), bivanes (Gill, 1963; McCready and Jex, 1964; Cramer, et al., 1961), two types of heat-transfer anemometers; (Miyake and Badgley, 1967; Dyer, 1960), fast-response cup anemometers (Frenzen, 1965) and vertical, propeller-type anemometers (Thorntwaite, et al., 1961 and Holmes, et al., 1964) have all been used in the atmospheric surface layer but each fails to meet one or more of the essential criteria mentioned above for measurements near the ground. The pressure sphere is well-suited to measuring the lateral and vertical wind components because they appear as products with the

large longitudinal velocity in the basic pressure measurement. It is felt that the anemometer system to be described does meet these requirements to greater degree than do other available instruments and will thus aid research on turbulent diffusion processes.

The basic sensor of our system is the anemoclinometer described by Martinot-Lagarde, et al., (1952) and made by the Institut de Mecanique des Fluides^{1/}. The tests to be described were conducted at the University of California at Davis as part of the 1967 Cooperative Field Experiment sponsored by the Atmospheric Sciences Laboratory, U. S. Army Electronics Command, Ft. Huachuca, Arizona. Wind velocity measurements made with our anemometer system were compared with cup anemometers. Eddy correlation shear stress measurements were compared both with wind profile data and with data from the large Davis shear-stress meter (Brooks and Pruitt, 1966). In addition measurements of the standard deviation of the vertical component of wind velocity are presented for Davis and also some from Hancock, Wisconsin.

2. Anemometer system

The anemometer system consists of a spherical probe with pressure ports drilled into its surface. This particular design of sphere, called Philip I, can be replaced satisfactorily by other styles. The pressures developed at these ports are transmitted through small tubes and measured by pressure transducers. The

^{1/} Institut de Mecanique des Fluides de Lille, 5, Boulevard Painleve, Lille (Nord), France.

electrical outputs of the pressure transducers can be analyzed to give the orthogonal components of the wind vector.

a. Spherical pressure probe

We used both 3-cm and 8-cm pressure probes as described by Martinot-Lagarde, et al., (1952). The 3-cm probe, shown in Fig. 1, consists of a spherical head mounted on a supporting shaft. A drawing of the head, showing some of the ports, is given in Fig. 2. When in use, the probe is fixed with the sphere on the upstream end of the shaft. Twelve small ports are drilled into the spherical surface and a pitot tube is centered in a Venturi which is bored in the sphere on the axis of the shaft. Eight of the twelve ports on the surface of the sphere are located on a circle at an angle of 47.5° to the shaft axis and serve as reference ports for the pitot tube in the Venturi; these eight holes are connected to a common pressure-averaging cavity in the shaft. The other four holes lie at right angles in the x,z and x,y planes, and each hole is at 45° from the shaft axis. The x-coordinate is taken parallel and the y- and z-coordinates perpendicular to the probe shaft, with z in the vertical plane. The open end of the pitot tube in the Venturi is in the upstream direction. The pressure difference

$$P_l = P_t - P_m \quad (1)$$

between the pitot tube and the cavity common to the eight reference ports, is proportional to the dynamic pressure,

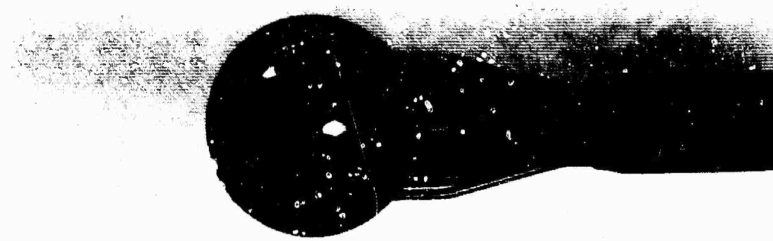


Fig. 1. Spherical sensing head of anemoclinometer showing pressure ports.

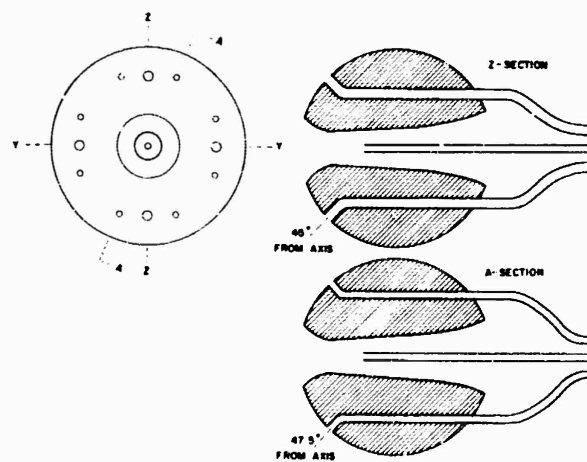


Fig. 2. Front and cross-section views of anemoclinometer head, with y- and z-coordinates shown on front view.

$$P_1 = \frac{1}{2} \rho V^2 \quad (2)$$

where

$$V^2 = (u^2 + v^2 + w^2) \quad (3)$$

where u , v , and w are the axial, cross-horizontal, and vertical wind components, ρ is the fluid density, and "a" is a constant of the probe equal to 1.015 according to data supplied by the manufacturer. The pressure difference between the two vertical ports (x, z plane) and that between the horizontal ports (x, y plane) are predicted reasonably well by

$$P_2 = b \rho u w \quad (4)$$

$$P_3 = b \rho u v \quad (5)$$

The factor, b , is a function of the Reynold's number but is relatively constant in the Reynold number range of 2,000 to 200,000.

Calibration data supplied by the manufacturer indicated that for the 3-cm spheres, the pressure ratios P_2/P_1 and P_3/P_1 were linearly related to the angles F and G respectively by the equations

$$F = c P_2 / (P_1 \cos G) \quad (6a)$$

$$G = c P_3 / (P_1 \cos F) \quad (6b)$$

where c is a constant and F and G are the complements of the

directional angles. Accordingly,

$$w = V \sin F \quad (7a)$$

$$v = V \sin G \quad (7b)$$

$$u \approx V(\cos F)(\cos G) \quad (7c)$$

The components of the wind vector are described more closely by equations (3), (6), and (7) than by equations (3), (4), and (5). When using (6), an iterative procedure is used to solve for F and G which are then used in equations (7).

b. Pressure transducers

Capacitive pressure transducers manufactured by Datametrics, Inc.^{2/} were chosen for the pressure measurement. The gains of the signal conditioners can be selected to provide full scale outputs ($\pm 5.0V$) for differential pressures of 10, 20, 30, 60, 100, 200, 300, 600, 1000, 2000, 3000, 6000, 10,000 dynes cm^{-2} . The transducer has a maximum nonlinearity of about $\pm 0.1\%$, zero drift of 10^{-5} of maximum range per degree Celsius and sensitivity change of $2 \times 10^{-2}\%/C$.

c. Frequency response

The frequency response and phase shift of a pressure transducer connected by tubing to a fluctuating pressure has been described by Iberall (1950), whose

^{2/} Datametrics Incorporated, 87 Beaver Street, Waltham, Mass. (Model 511-8 Barocel).

analysis was basic to our system design. The response of the transducer is controlled by the size and length of the tubing and the effective internal volume of the transducers. The transducers used in our system were a special design which used a stiffer-than-normal diaphragm and a reduced internal volume of 1.6 cm^3 to improve the frequency response of the system. The spherical probe was connected by approximately 43 cm of approximately 1.5-mm I.D. tubing to the pressure transducer; tests showed this tubulation optimized the system performance.

The frequency response and phase shift of the system were checked by producing known sinusoidal pressure differences at various frequencies between appropriate ports on the surface of the pressure spheres and monitoring the amplitude and phase of the transducer output. Instead of attempting to produce the pressure differences between ports on a single sphere, two identical spheres were placed in separate pressure chambers with tubing connecting appropriate ports to the pressure transducers. Equal pressure fluctuations, 180 degrees out of phase with each other, were produced in the two chambers by pistons which were closely coupled to the chambers. The pistons were driven by a variable speed motor and the phase of the pressure fluctuation was determined by optically sensing the position of the Scotch yoke piston drive. Typical amplitude and phase shift characteristics of the 3-cm anemoclinometer and pressure transducer are shown in Table 1. The response was limited by the tubing used to construct the anemoclinometers and could be improved by redesigning the pressure sphere, tubulation, and transducer system for optimum performance.

Table 1. Anemometer system frequency response and phase shift.

frequency Hz	relative amplitude	phase shift (degrees)
1	1.00	0
5	1.02	18
10	1.05	48
15	1.00	76
20	0.84	100
25	0.63	126
30	0.47	145

d. Field installation

For field measurements, the pressure-sphere anemometer is mounted on a 2.5-cm diameter mast (Fig. 3) at the desired height. The anemometer is oriented with the shaft axis parallel to the anticipated direction of mean flow. The three pressure transducers are housed in a temperature-controlled ($\pm 0.2^\circ\text{C}$) box which is an integral part of the mounting assembly located at the opposite side of mast to the pressure sphere. The temperature control provides the required zero stability. The whole assembly can be moved to different levels on the mast or completely removed as one unit without disconnecting the pressure transducers from the pressure sphere. The pressure transducers are connected by 150 m of cable to their power supply and signal conditioners which are housed in a 2.5 x 6 m air-conditioned instrument trailer.

The masts are on pivot points and supported higher up by guy wires attached to bearings. This arrangement

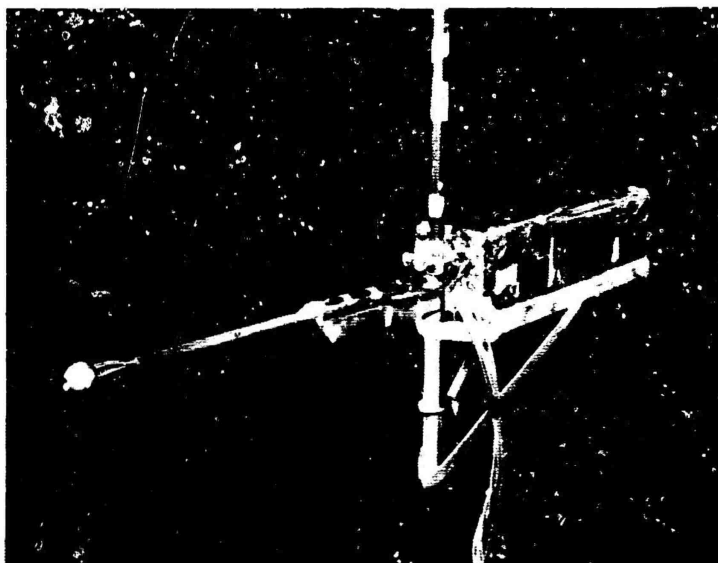


Fig. 3. Anemometer assenbly on its mast.

allows the mast to be rotated so that the probe can be oriented easily into the mean wind. When the data discussed below were obtained, the anemometer was rotated in azimuth manually into the mean wind; at the beginning of each half-hour run the orientation was adjusted to the position of the mean wind for the previous half hour. Since then, a motor assembly, controlled by the $P_3 = b_0uv$ output of the wind probe, has been used to continuously but slowly adjust the position of the probe into the wind. The orientation of the mast is monitored through the output of a potentiometer attached to the base of the mast and is included in the calculation of the components of the wind vector.

3. Data handling

Since the sensors respond to frequencies as high as 30 Hz, a large amount of data must be analyzed if the system is operated over extended periods of time. Storing large quantities of data under field conditions is costly and often results in a serious reduction in data quality. In addition it is highly desirable that some data analysis capability be available at the experimental site so that the experiment can be run efficiently and instrumentation faults detected as soon as possible. After a careful study of the available alternatives we elected to drastically reduce, by digital on-line computation, the quantity of data to be stored to the point where it could be typed out in table form by a typewriter or stored on paper tape. In 1967, this amounted to a data reduction of approximately 18000:1.

In 1967 the data analysis was performed on an EMR 6020

computer^{3/} and later on the faster and smaller EMR 6130. The 1967 system included a Raytheon A-D converter, 6020 computer and model 33 teletype with paper tape reader with punch. The 6130 system includes an EMR 2701 converter, and a higher speed paper tape reader and punch in addition to the model 33 teletype.

Five channels of analogue data were obtained at each of three sites to give a total of 15 channels. At each site three channels represented the three pressure differences P_1 , P_2 , P_3 and the other two channels represented a fast response resistance thermometer (Wesely, et al., 1969) and a fast response barium fluoride relative humidity element (Jones, 1967). The velocity components of the wind vector were calculated using equations (6) and (7) and means, squares, and crossproducts of the five parameters (u , v , w , T , e) were calculated, where T , and e were the temperature and vapor pressure respectively.

The complete operation (i.e. 15 channels of analogue to digital conversion and the data analysis) was repeated 40 times per second. At the end of each half-hour sampling period the necessary scaling operations were performed and the outputs were teletyped. Approximately 2.5 minutes of each half-hour period were required for output and no data were collected during this time.

This data system has proven to be a very efficient and powerful research tool and it is felt that the success achieved with the anemometer system would not have been possible if, alternatively, data storage equipment had been selected.

^{3/} Electro-mechanical Research, Inc., 8001 Bloomington Freeway, Minneapolis, Minn.

4. Tests of anemometer system

A complete description of the experimental area may be found in Brooks and Pruitt (1966). A plan of the field site is given in Fig. 4, showing the heights and spatial arrangement of our three anemometers with respect to the 6-meter, Davis shear stress lysimeter and the triangular array of masts installed by Dr. C. R. Stearns, University of Wisconsin Department of Meteorology. These masts carried cup anemometer and aspirated dry- and wet-bulb thermometers. The surface was uniform *alta fescue*, 5 to 10 cm high, which was periodically mown.

Wind velocity measurements with our pressure probe are compared with cup anemometer data and our eddy-correlation, shear stress measurements are compared with both shear stress lysimeter data and shear stresses obtained by Dr. Stearns' preliminary analysis of his vertical profiles of wind velocity and of temperature (KEYPS-type, diabatic profile analysis). In addition, a graphical description of the vertical fluctuations of wind velocity as a function of the stability parameter z/L is presented.

a. Comparison of wind velocity measurements

The on-line computer program which was used to analyze our anemometer data included the calculation of the horizontal wind.

$$\overline{V}_H = (u^2 + v^2)^{1/2}$$

where u and v are the instantaneous values of the horizontal components of the wind vector. The value of \overline{V}_H is primarily dependent upon P_1 , as given in (2), and

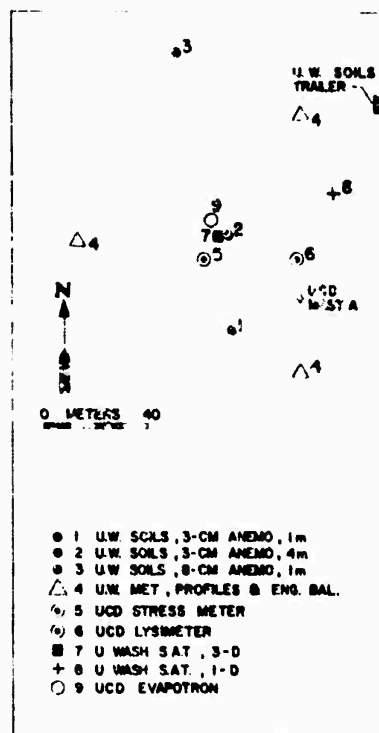


Fig. 4. Plan of the site of the 1967 cooperative field experiment.

since u generally is much larger than either v or w , errors associated with the measurement of wind angles calculated from (6) do not seriously degrade the estimate of $\overline{V_H}$. The good agreement between $\overline{V_H}$ and cup anemometer measurements presented in Fig. 5, demonstrate the accuracy of pressure-sphere measurements of u .

b. Comparison of shear stress measurements

Shear stress measurements obtained with the pressure-sphere anemometer are compared with data from the shear-stress lysimeter and from analysis of the wind profiles. The data obtained on May 2, 3, 4, and 5 are presented in Figs. 6 and 7. The pressure-sphere anemometer data represent the average of measurements available at the three sites. The shear stress data from the three wind profile sites also were averaged. The Davis shear stress lysimeter independently measures the north-south, and east-west components of the surface shear stress and the data used were computed by W. O. Pruitt as the vector sum of the half-hour means of these components.

Agreement among the three methods is satisfactory even though the aerodynamic analysis generally provides somewhat larger values than the other two methods. This discrepancy appears unduly large on May 4 and 5. The average z_0 value computed from the wind profiles is 0.95 cm for May 2 and 3, and about 1.4 cm for May 4 and 5. For the latter two days new estimates of the shear stress were calculated via a drag coefficient using $z_0 = 0.95$ cm, a KEYPS diabatic correction and the cup anemometer wind velocity at 80 cm. The results of this calculation are more consistent with the comparisons on May 2 and 3. Calculations indicate that best agreement between drag

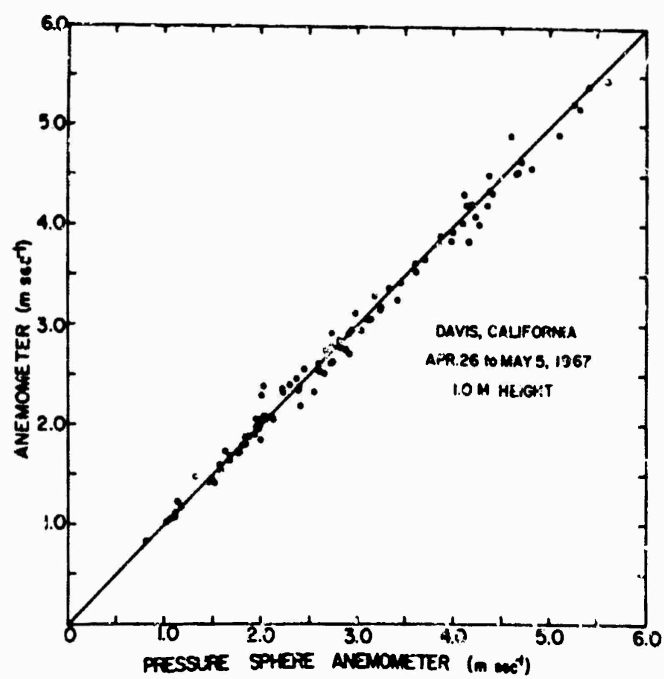


Fig. 5. Comparison of horizontal wind measured with the three-dimension anemometer and with cup anemometers.

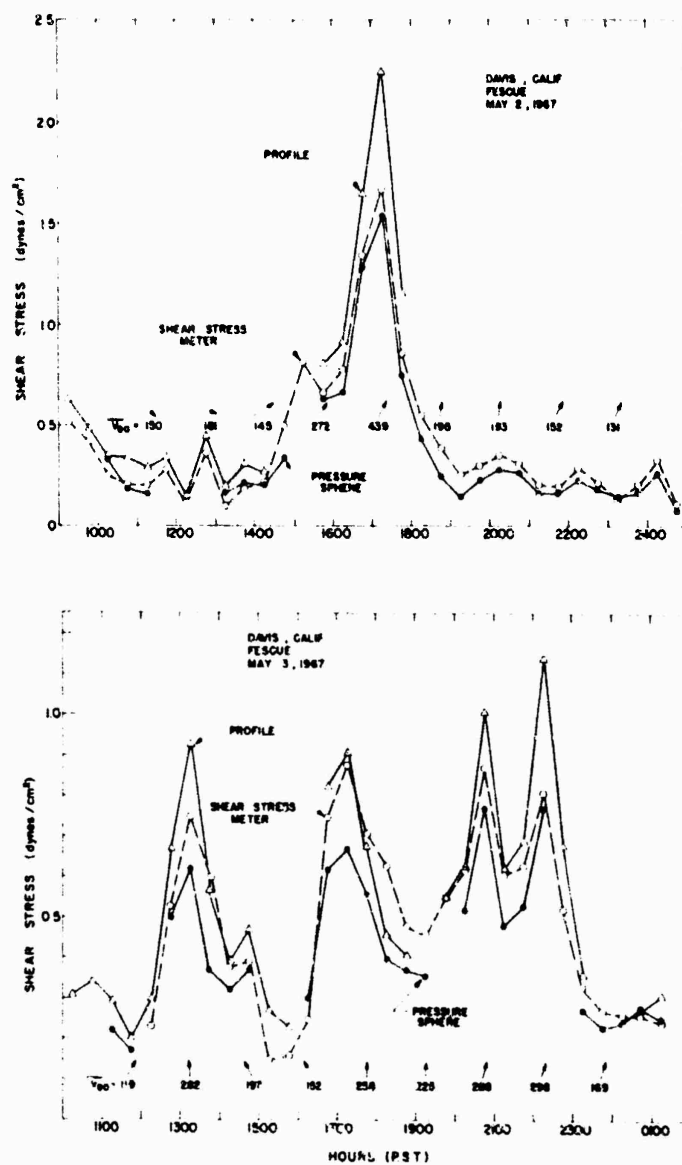


Fig. 6. Comparison of shear stress measurements on May 2 and 3, 1967.

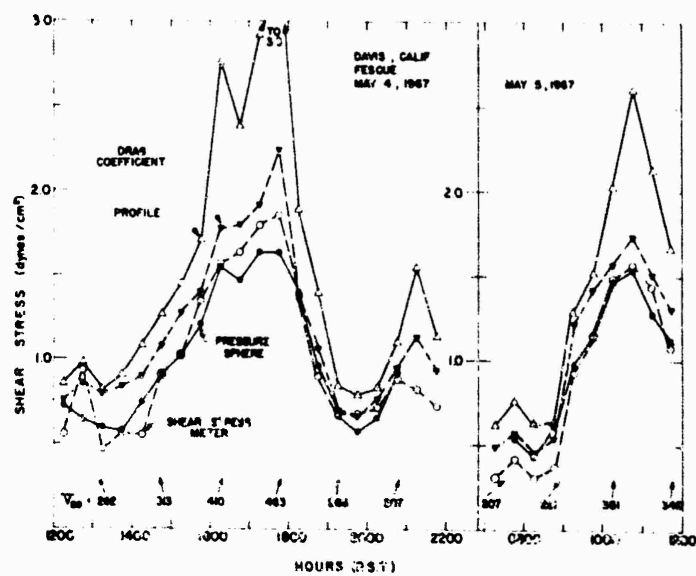


Fig. 7. Comparison of shear stress measurements on May 4 and 5, 1967.

coefficient and eddy correlation determinations would have been obtained by using $z_0 \approx 0.7$ cm.

c. Standard deviation of the vertical wind

Ratios of the standard deviation of the vertical component of wind velocity to the friction velocity, u_* , as measured at the two 1-m sites and one 4-m site, are plotted in Fig. 8. The comparison of horizontal wind measured with our anemometer system and with cup anemometers indicates that our pressure-sphere anemometer measures the u-component of wind velocity accurately. Accordingly the ratio σ_w/u_* would vary as the square root of a constant percentage error in the measurement of w . This is not a very sensitive test of the measurement of the vertical component of velocity since the error in w would be twice that in σ_w/u_* , but our value of 1.25 for σ_w/u_* under neutral conditions is the same as that derived by Panofsky, et al., (1967) and close to the value of 1.33 predicted by Lettau (1968). Over one hundred additional data points were collected over snap bears ($z_0 = 4$ cm) in 1968 at Hancock, Wisconsin. The data, averaged over stability ranges of $z/L = -0.15$ to 0.25 , are also presented in Fig. 8 and are very similar to the Davis data. For ready comparison with the Panofsky (1967) and Panofsky et al. (1967) the curve $[1 - (z/L)/s]^{1/4}$ is plotted.

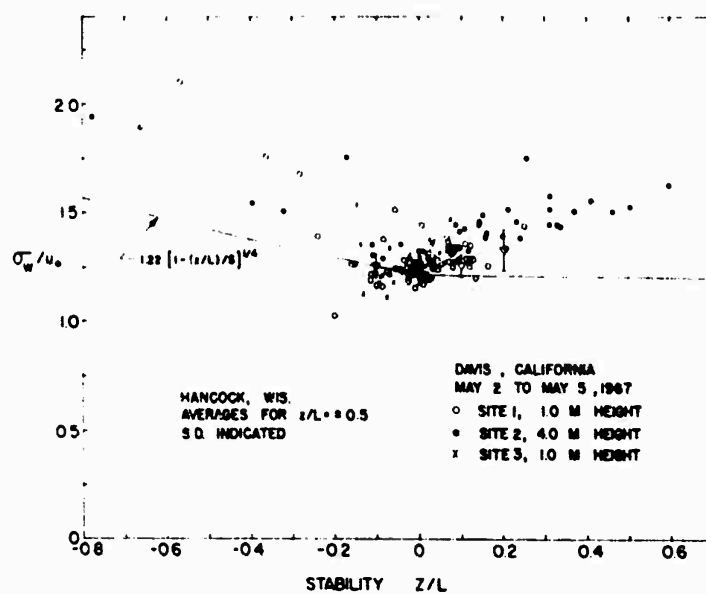


Fig. 8. Ratio σ_w/u_* as a function of z/L .

REFERENCES

- Brooks, F. A. and W. O. Pruitt, 1966: Investigation of energy, momentum, and mass transfer near the ground, University of California-Davis, Final Rept., 1965, U. S. Army Electronics Command Grant DA-AMC-28-043-65-G12, 259 pp. DDC Accession # AD 635 588.
- Cramer, H. E., F. A. Record, and J. E. Tillman, 1961: Studies of the spectra of vertical fluxes of momentum, heat and moisture in the atmospheric boundary layer. Ann. Rept., Meteor. Dept., Mass. Inst. Tech. 130 pp.
- Dyer, A. J., 1960: Heat transport anemometer of high stability. J. Sci. Instr., 37, 166-169.
- Frenzen, P., 1965: Determination of turbulence dissipation by Eulerian variance analysis. Quart. J. Roy. Meteor. Soc., 91, 28-34.
- Gill, G. C., 1963: Data validation. Dept. Meteor. and Oceanog., University of Michigan, Publ. No. 79, Ann Arbor. 23 pp.
- Holmes, R. M., G. C. Gill, and H. W. Carson, 1964: A propeller-type vertical anemometer. J. Appl. Meteor., 3, 802-804.
- Iberall, A. S., 1950: Attenuation of oscillatory pressures in instrument lines. U. S. Nat. Bur. Standards. J. Res., 45, 85-108.
- Jones, F. E., 1967: Study of the storage stability of the barium fluoride film electric hygrometer element. U. S. Nat. Bur. Standards J. Res., 71C, 199-207.

- Kaimal, J. C., H. E. Cramer, F. A. Record, J. E. Tillman, J. A. Businger, and M. Miyake, 1964: Comparison of bivane and sonic techniques for measuring the vertical wind component. Quart. J. Roy. Meteor. Soc., 90, 467-472.
- Kaimal, J. C., J. C. Wyngaard, and D. A. Haugen, 1968: Deriving power spectra from a three-component sonic anemometer. J. Appl. Meteor., 7, 827-837.
- Lettau, H. H., 1968: Studies of effects of boundary modification in problems of small area meteorology. University of Wisconsin Ann. Rept. 1966-67. U. S. Army Electronics Command Grant DA-AMC-28-043-66-G24, 156 pp.
- MacCready, P. B., and H. R. Jex, 1964: Response characteristics and meteorological utilization of propeller and vane wind sensors. J. Appl. Meteor., 3, 182-193.
- Martinot-Lagarde, A., A. Fauquet, and F. M. Frenkiel, 1952: The IMFL anemoclinometer -- an instrument for the investigation of a fluctuating velocity vector. Rev. Sci. Instr., 23, 661-666.
- Miyake, M. and F. I. Badgley, 1967: A constant temperature wind component meter and its performance characteristics. J. Appl. Meteor., 6, 186-194.
- Panofsky, H. A. and B. Prasad, 1965: Similarity theories and diffusion. Int. J. Air Water Poll., 9, 419-430.
- Panofsky, H. A., N. Busch, B. Prasad, S. Hanna, E. Peterson, and E. Mares, 1967: Properties of wind and temperature at Round Hill, South Dartmouth, Mass. Pennsylvania State University Tech. Rept. ECOM-0035-F. U. S. Army Electronics Command Grant DAB07-67-0035, 95 pp.

Thornthwaite, C. E., W. J. Superior, J. R. Mather, and
F. K. Hare, 1961: The measurement of vertical winds
and momentum flux. Pub. in climatology, 14(1),
Centerton, N. J.

EDDY CORRELATION MEASUREMENTS OF SENSIBLE
HEAT FLUX NEAR THE EARTH'S SURFACE

M. L. Wesely, G. W. Thurtell, and C. B. Tanner

ABSTRACT

A three-dimensional pressure-sphere anemometer and fast thermometer system (P.S.A.T.) was used to measure vertical heat flux density in the atmospheric surface layer at one to four meters above alfalfa and snap beans. Good agreement with independent measurements was obtained, which shows that the P.S.A.T. is sufficiently small and has adequately high frequency response and accuracy for eddy-correlation measurements within one meter of the surface. Also obtained with the P.S.A.T. were $\overline{(u'T')}/\overline{(w'T')}$, $r_{u,T}$, $r_{w,T}$, and σ_T/T_* and their dependence upon stability. When the atmosphere was thermally stable, slow wave motions frequently increased σ_T even though turbulent mixing was lacking.

1. Introduction

The turbulent vertical heat flux, H , in the atmospheric surface layer over a horizontally uniform surface can be determined from

$$H = \rho c_p \overline{w'T'} \quad (1)$$

where ρ is the air density, c_p is the specific heat of air, w is the vertical wind velocity, and T is the air temperature. The bar denotes a time average and the prime denotes an instantaneous deviation from the time-averaged quantity. The major difficulty with making eddy correlation measurements of turbulent heat transport is in measuring the vertical wind. This requires an accurate and stable anemometer that measures the wind components with a sufficiently high frequency response for use close to the surface where the fetch requirements are minimum. At present, the most promising anemometers are sonic anemometers, either pulsed wave (Mitsuta, 1966) or continuous wave (Kaimal, et al., 1968), and the pressure-sphere anemometer (Thurtell, et al., 1969). The pressure-sphere anemometer is smaller than sonic anemometers and thus can be used closer to the surface where eddies are smaller.

This paper describes the measurement of turbulent heat transport with the pressure-sphere anemometer and a small, fast-response, resistance thermometer. Measurements of heat flux above alta fescue are compared with independent measurements made by others at the University of California at Davis as part of the 1967 Cooperative Field Experiment sponsored by the Atmospheric Sciences Laboratory, U. S. Army Electronics Command, Ft. Huachuca, Arizona. Also presented are measurements of heat flux

made in 1968 over snap beans at the University of Wisconsin Hancock Experiment Farm. A summary of the standard deviation of temperature, σ_T , divided by the dimensionless temperature scale, T_* , and of correlation coefficients for wind and temperature also is given for measurements over the above two surfaces.

2. Equipment, sites, and comparison measurements.

a. Pressure sphere anemometer-thermometer assembly

A fine-wire-resistance thermometer (Wesely, et al., 1969) was mounted parallel to the horizontal ports of the pressure sphere (Thurtell, et al., 1969), as shown for a 3-cm diameter sphere in Fig. 1. The closest edge of the thermometer was about 1.25 cm from the 3-cm anemoclinometer and about 2.5 cm from the 8-cm anemoclinometer. The thermometer was placed so that the sensitive element was slightly upwind of the leading edge of the pressure sphere; tests showed that this forward placement was necessary to prevent thermal modification of the air that flowed to the thermometer past the large thermal mass of the sphere. The thermometer was outside the angle of acceptance of the anemoclinometer and tests showed that the flow patterns around the sphere were not significantly affected.

When the 1967 data were obtained, the anemometer was rotated in azimuth manually into the mean wind at the beginning of each half-hour run. During 1968, a motor assembly, controlled by the anemometer, rotated the mast to point the anemometer into the wind. The azimuth rotation of the mast was monitored with a potentiometer attached to the base of the mast and was included in the

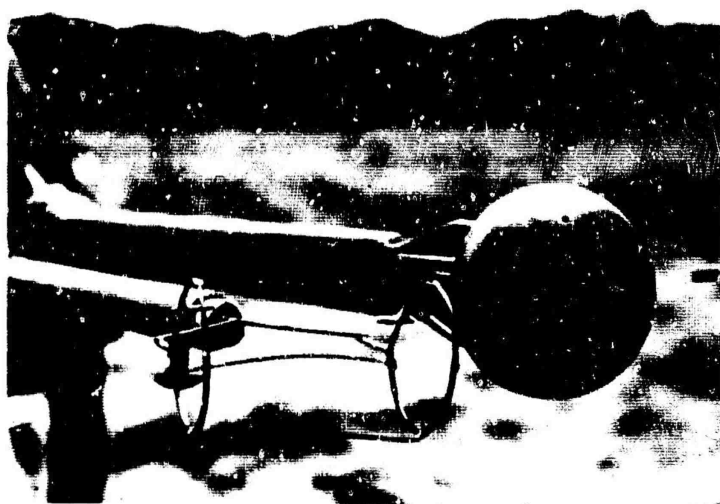


Fig. 1. Arrangement of thermometer with the anemoclinometer.

calculation of the components of the wind vector.

b. Data handling

The current through the thermometer was kept nearly constant at 0.3 ma by its bridge, which was located about 5 m from the thermometer. The bridge output was fed directly into a floating differential amplifier with a 1000 gain, to provide a signal with a temperature sensitivity of about 0.6C v^{-1} . The amplifier output was transmitted through 150 m of cable to the instrument trailer. The thermometer and anemometer signals were fed to a scanner-converter and an EMR computer as described by Thurtell, et al., (1969). The sampling rate was 40 sec^{-1} in 1967 and 150 sec^{-1} in 1968.

The outputs of the thermometer bridges were filtered in the amplifiers to match the phase shifts and response of the pressure-sphere anemometer and also to avoid high frequency noise. The response of the two systems are shown in Fig. 2. The curves for the anemoclinometers are roughly representative of the vertical wind component.

c. Site description

A description of the site of the 1967 Cooperative Field Experiment, and our instrument locations as well as the locations of other relevant instruments may be found in Thurtell, et al., (1969).

The 1968 measurements at Hancock, Wisconsin were on a 100×160 m field of snap beans planted in rows spaced at 90 cm. The snap beans were about 30 cm high and provided about 50% cover over Plainfield sand. The fetch was 60 m to the north, 50 m to the east and west and 100 m to the south. Beyond these boundaries to the south was alfalfa extending for 150 m to a 15-m high

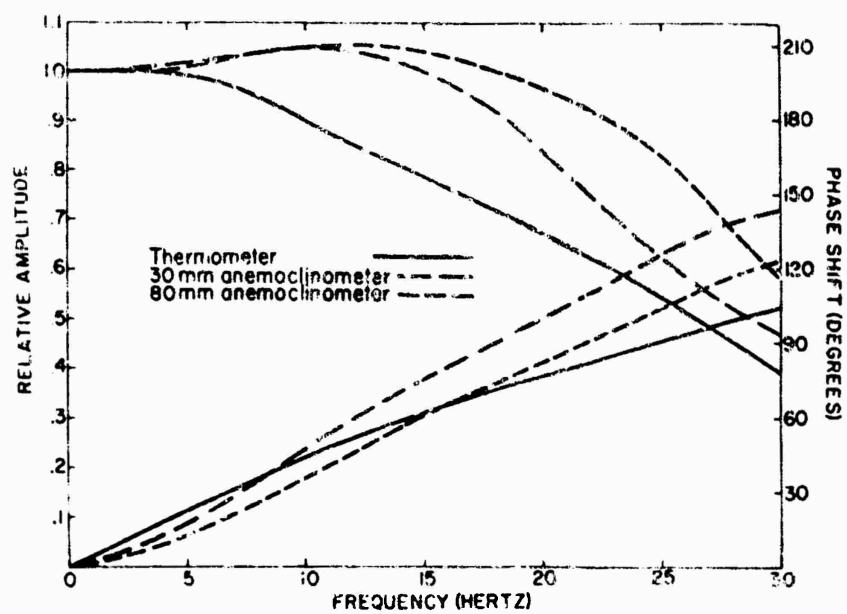


Fig. 2. Frequency response and phase shift of the thermometer system and of the anemometer system.

woods and to the west was an alfalfa field extending 100 m to a 10-m high shelter belt, to the northwest were low crops extending 200 m to a shelter belt, and to the east was alfalfa extending 300 m to a woods. The wind was predominately from the south and west during the tests.

d. Independent measurements of sensible heat flux

During the 1967 Cooperative experiment, Dr. C. R. Stearns, University of Wisconsin, measured wind, temperature, and vapor pressure profiles at three locations in a triangular array. At the same locations, he measured net radiation and soil heat flux density for energy balance calculations. The sensible heat flux was calculated from the energy balance using Bowen's ratio, $q = \gamma \Delta T / \Delta e$, determined from vertical temperature and vapor pressure differences measured over the same height intervals within 120 cm of the surface. An aerodynamic calculation of the sensible heat flux also was made using the wind and temperature profiles to find the shear stress with a KEYPS-type analysis and then using similarity ($K_H = K_M$) and the profiles to find the heat flux. Dr. Stearns supplied us data from both analyses.

The University of California-Davis group measured the evaporation with a 6-m diameter weighing lysimeter (Pruitt and Angus, 1960). In addition, they measured net radiation and soil heat flux near the lysimeter. The sensible heat flux density was calculated by differencing the energy balance terms as $H = R_n - G - E$. The Davis group also measured the sensible heat flux directly with an Evapotron (Dyer and Maher, 1965). Both measurements were supplied to us by Dr. W. O. Pruitt, University

of California-Davis.

The University of Washington group measured the sensible heat flux both with a one-dimensional sonic anemometer thermometer (Kaimal and Businger, 1963) and with a three-dimensional unit (Mitsuta, 1966). These data were supplied by Dr. J. A. Businger.

The comparison data at Hancock, Wisconsin were obtained by differencing measurements of net radiation, soil heat flux density and evaporation. The evaporation was measured with a 2.1 x 5.5 m weighing lysimeter (Black et al., 1968), the net radiation was measured with a large Funk radiometer, and the soil heat flux was measured with soil heat flux plates (Fuchs and Tanner, 1968) and integrating soil thermometers (Tanner, 1958).

3. Heat flux density comparisons

During the 1967 Cooperative Field Experiment, fetches were easily in excess of 100 m, except for small changes in elevation, since the wind was predominately from the south and southwest where fields had similar vegetation and roughness.

Heat flux estimates by the pressure-sphere anemometer and thermometer system (called the P.S.A.T. hereafter) were averaged from two 1-m high units and one 4-m high unit to give the results shown in Fig. 3. There was no systematic difference of heat flux measured at the two heights except from 1615 to 2015 on April 27, when the data from the higher mast were discarded. Heat flux data from a three-dimensional, sonic anemometer-thermometer at four meters above the surface and one-dimensional, sonic anemometer-thermometer 2.2 m high agreed well with the P.S.A.T.; the scatter of estimates at our three different P.S.A.T.

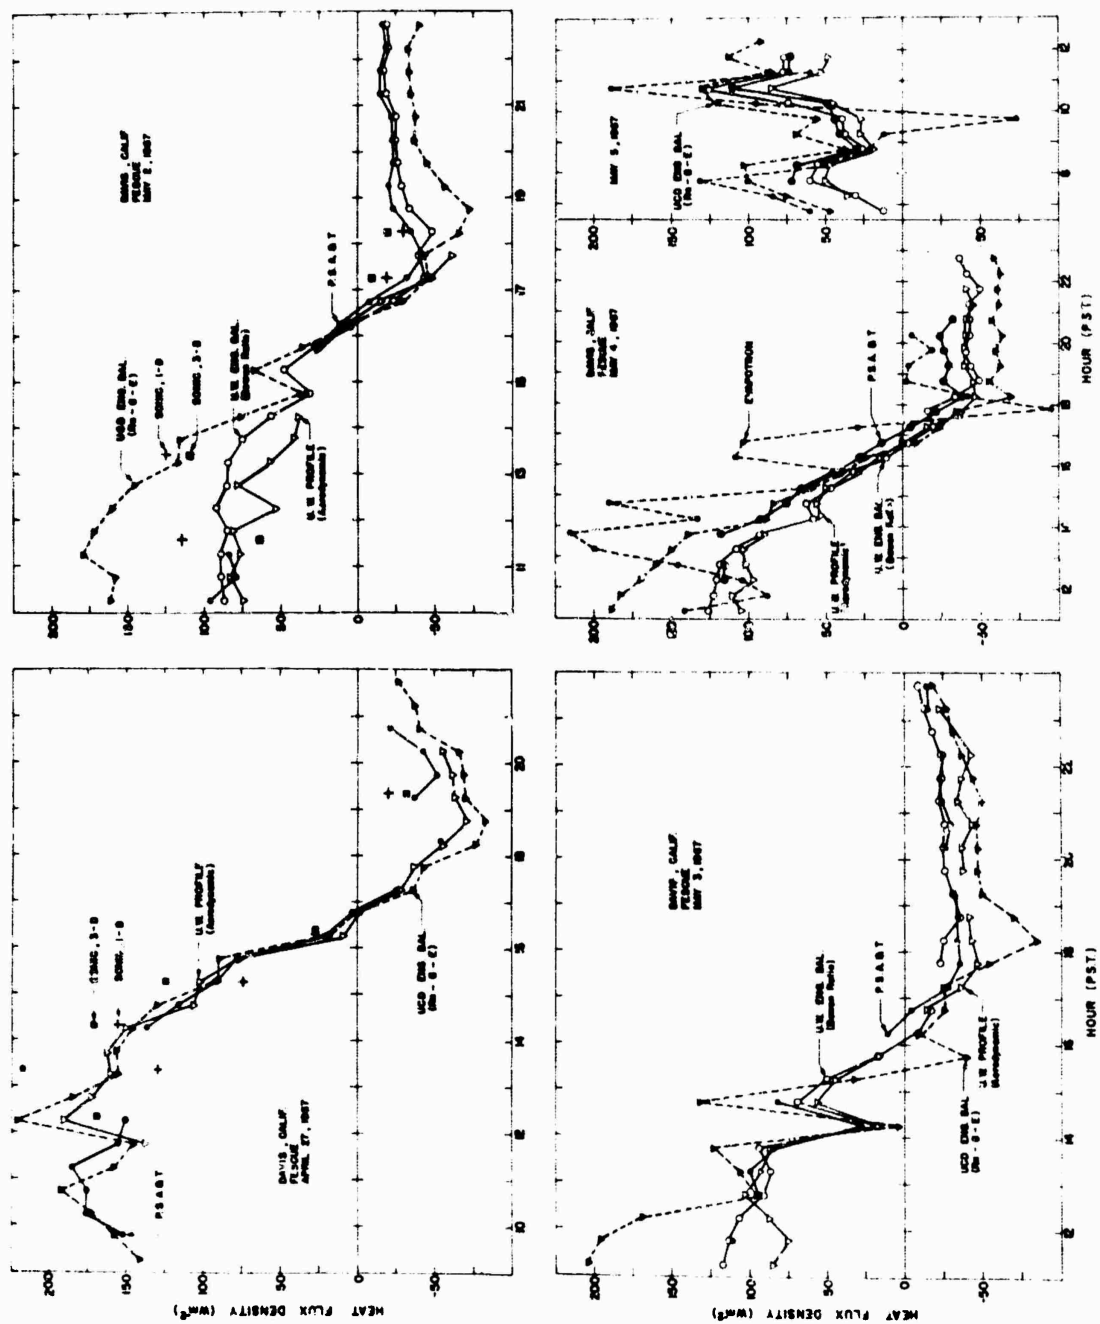


Fig. 3. Comparisons of heat flux density estimates at Davis, California for April 27, May 2, May 3, and May 4 and 5 of 1967.

sites frequently is of the same order as the difference between our data and that of the sonic anemometer-thermometer.

The eddy-flux from the Evapotron is shown on Fig. 3 for May 4 and 5. The wide fluctuations may have been due to the averaging process to remove the mean wind and temperature terms since a time constant of only one minute is used in this system.

Several indirect estimates of sensible heat flux are also shown in Fig. 3. The energy balance estimates obtained from differencing the energy balance $H = R_n - G - E$ appear high during the day and low at night. Since $|R_n|$ and $|E|$ are much larger than $|H|$, a small relative error in these terms could produce a large relative error in $|H|$.

The results from the Bowen ratio energy balance and those from the aerodynamic method are the averages of heat flux data from three sites. These methods are nearly independent, but not completely so, because they use the same temperature profiles. Both methods show remarkably good agreement with the P.S.A.T.

In Fig. 4 is shown the average of heat flux estimates at two P.S.A.T. sites. Both sites were 117 cm above the soil surface until 1030 when one site was moved to 210 cm above the surface. Since estimates of heat flux by the P.S.A.T. at 210 cm from the soil surface were not systematically different from the 117-cm high site, fetch was considered adequate. On another day, we compared measurements with one P.S.A.T. at 75 cm and the other at 117 cm and found no systematic differences.

The energy balance estimate of heat flux leads the P.S.A.T. estimate in the morning. This was probably due

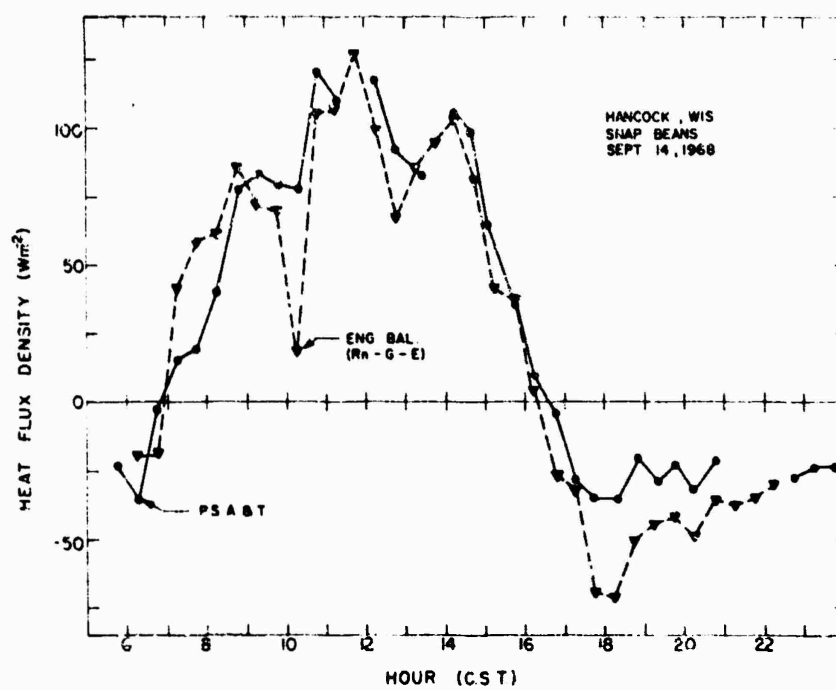


Fig. 4. Heat flux density estimates over snap beans.

to a time lag in the evaporative flux caused by unrepresentative heat storage in the lysimeter (Black, et al., 1968). This also could have caused an overestimate of the magnitude of the heat flux after sunset. The low value of 1015 was caused by an unexplainably large estimate of evaporative flux.

4. Temperature structure

When the data used in this section were collected, H and τ were constant with height, within the accuracy of our measurements; thus we can use H and τ as scaling factors as described by Monin and Obukhov (1954). They define a dimensionless height ratio z/L where z is the height from the surface and $L = -u_*^3 / (k g \rho c_p T) / (kgH)$ [$u_* = (\tau/\rho)^{1/2}$ is the friction velocity; $k = 0.428$ is Karman's constant, and $g = 980 \text{ cm sec}^{-2}$]. The relationships obtained between our measurements of z/L and our measurements of the correlation coefficients $r_{u,T}$ and $r_{w,T}$, and of the ratio $(\overline{u'T'})/(\overline{w'T'})$ are given in Fig. 5. Fig. 7 shows the relation of z/L to a dimensionless standard deviation of temperature, σ_T/T_* [σ_T is the standard deviation of air temperature and $T_* = -H/(k \rho c_p u_*)$].

It appears that $(\overline{u'T'})/(\overline{w'T'}) \approx 4$ for $z/L = 0.1$ and ≈ 2.5 for $z/L = -0.05$. The large scatter indicates that more meaningful results might have been obtained from sampling periods shorter than the 30 min used. For instance, Zubkovskii and Tsvang (1966) obtain less scatter by using running means of the winds and temperatures from electrical filters with time constants of 100 sec and 80 sec, respectively. Fig. 5 shows that air temperatures are more closely coupled with horizontal winds than with vertical winds since $|r_{u,T}| > |r_{w,T}|$.

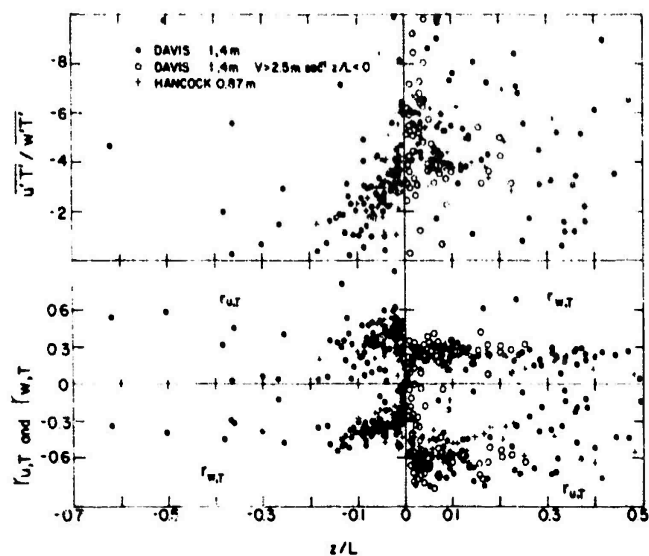


Fig. 5. Correlation coefficients of wind and temperature and $(\overline{u'T'})/(\overline{w'T'})$ as a function of stability.

This is especially true for stable conditions. As shown in Fig. 6, the fluctuations of air temperature and vertical wind during unstable conditions are much larger and faster than during stable conditions; however, it has been observed that slow wave motion (not evident in Fig. 6) frequently occurs at night when the wind speed is low. Then the temperature at a stationary height in a highly stratified atmosphere fluctuates as much as 3°C every 50 to 200 sec, the period of the slow waves. This oscillation substantially increases σ_T and probably accounts for some small values of $r_{w,T}$ and $|r_{u,T}|$ for large positive values of z/L .

In Fig. 7, σ_T/T_* is plotted against z/L and appears to scale well for unstable conditions, except near $z/L = 0$, where $T_* = 0$. A function suggested by Dyer (1965) is drawn following Panofsky, et al., (1967). Data from Russian sonic anemometers and resistance thermometers (Mordukhovich and Tsvang, 1966) and data from a one-dimensional sonic anemometer-thermometer (Businger et al., 1967) are also included in Fig. 7. The P.S.A.T. data agrees well with the Russian data, but appears lower than the data summarized by Panofsky et al., (1967).

The large scatter for stable conditions may be caused in part by small absolute errors in τ and H , since both τ and H are about ten times smaller at night than during the day; however, slow wave motion may increase σ_T without increasing the heat flux enough to keep σ_T/T_* from increasing whenever these large-scale disturbances occur. Since Mordukhovich and Tsvang (1966) use a running mean of temperature with a time constant of 80 sec, temperature oscillations with periods longer than 20 sec are substantially attenuated, causing their

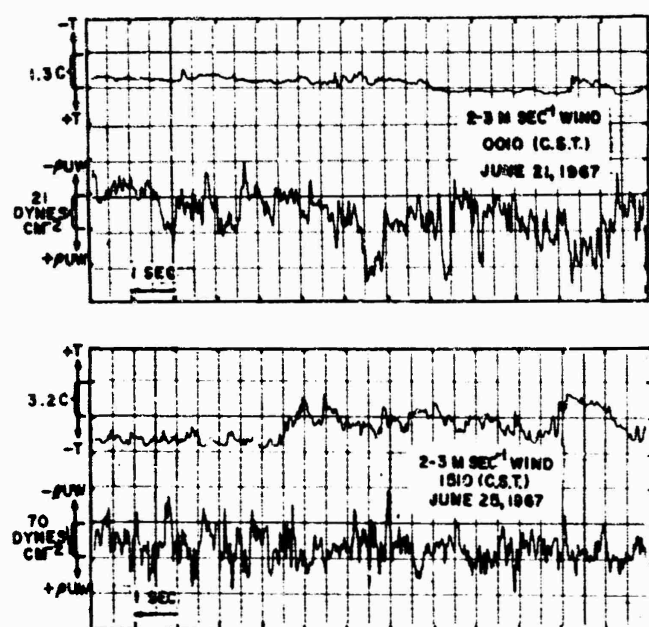


Fig. 6. Fluctuations of T and ν_w for stable conditions at 2.0 m (bottom) above bare plainfield sand at Hancock, Wis.

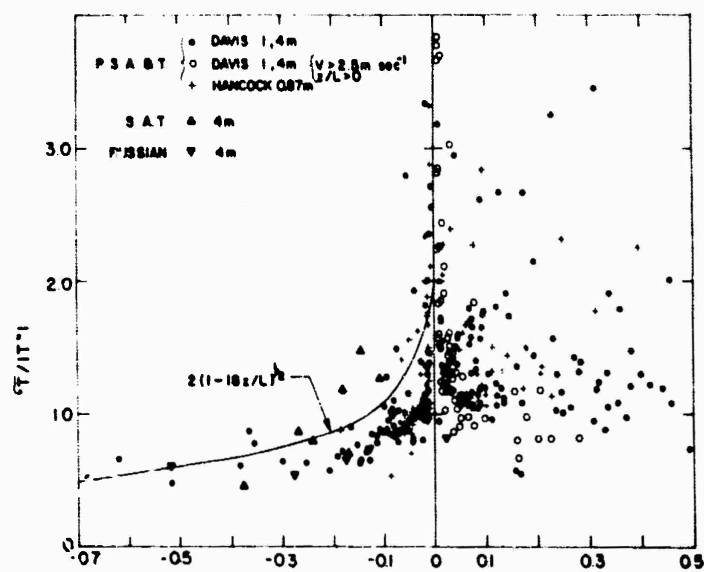


Fig. 7. Standard deviation of dimensionless temperature as a function of stability.

estimates of σ_T/T_* to have less scatter and be lower than our estimates. Measurements during stable conditions, when the wind speeds were at least 2.5 m sec^{-1} at 1 m, have less scatter; mixing is probably adequate then to prevent domination by large-scale disturbances.

REFERENCES

- Black, T. A., G. W. Thurtell, and C. B. Tanner, 1968: Hydraulic load cell lysimeter, construction, calibration and tests. Soil Sci. Soc. Amer. Proc., 32, 623-633.
- Businger, J. A., M. Miyake, A. J. Dyer, and E. F. Bradley, 1967: On the direct determination of turbulent heat flux near the ground. J. Appl. Meteor., 6, 1025-1032.
- Dyer, A. J., 1965: The flux-gradient relation for turbulent heat transfer in the lower atmosphere. Quart. J. Roy. Meteor. Soc., 91, 151-157.
- Dyer, A. J., and F. J. Maher, 1965: Automatic eddy-flux measurement with the evapotron. J. Appl. Meteor., 4, 622-625.
- Fuchs, M., and C. B. Tanner, 1968: Calibration and field test of soil heat flux plates. Soil Sci. Soc. Amer. Proc., 32, 326-328.
- Kaimal, J. C., and J. A. Businger, 1963: A continuous wave sonic anemometer-thermometer. J. Appl. Meteor., 2, 156-164.
- Kaimal, J. C., J. C. Wyngaard, and D. A. Haugen, 1968: Deriving power spectra from a three-component sonic anemometer. J. Appl. Meteor., 7, 827-837.
- Mitsuta, Y., 1966: Sonic anemometer-thermometer for general use. J. Meteor. Soc. Japan, 44, 12-23.
- Monin, A. S., and A. M. Obukhov, 1954: Fundamental regularities of turbulent agitation in the ground layer of the atmosphere. Transactions of the Geophysical Institute of the Academy of Sciences, U.S.S.R., 24, 163-187.

- Mordukhovich, M. I., and L. R. Tsvang, 1966: Direct measurement of turbulent flows at two heights in the atmospheric ground layer. Izv. Atmos. Oceanic Phys., 2, 786-803.
- Panofsky, H. A., N. Busch, B. Prasad, S. Hanna, E. Peterson, and E. Mares, 1967: Properties of wind and temperature at Round Hill, South Dartmouth, Mass. Pennsylvania State University Tech. Rept. ECOM-0035-F. U. S. Army Electronics Command Grant DAB07-67-0035, 95 pp.
- Pruitt, W. O., and D. E. Angus, 1960: Large weighing lysimeter for measuring evapotranspiration. Trans. Amer. Soc. Agric. Eng., 3, 13-15.
- Tanner, C. B., 1958: Soil thermometer giving the average temperature of several locations in a single reading. Agron. J., 50, 384-387.
- Thurtell, G. W., C. B. Tanner, and M. L. Wesely, 1969: Three-dimensional pressure-sphere anemometer system. J. Appl. Meteor., 8 (submitted).
- Wesely, M. L., G. W. Thurtell, and C. B. Tanner, 1969: A fast-response thermometer for eddy correlation measurements. J. Appl. Meteor., 8 (submitted).
- Zubkovskii, S. L., and L. R. Tsvang, 1966: Horizontal turbulent heat flow. Izv. Atmos. Oceanic Phys., 2, 1307-1310.

EVAPORATION MEASUREMENTS BY AN EDDY CORRELATION METHOD

S. M. Goltz

C. B. Tanner

G. W. Thurtell

F. E. Jones^{1/}

^{1/} F. E. Jones is with Institute for Basic Standards,
National Bureau of Standards, Washington, D. C. 20234

ABSTRACT

Eddy correlation measurements of water vapor flux density have been made using a barium fluoride film humidity sensor. During morning and evening periods, good agreement was obtained between eddy correlation data and two independent methods. Serious disagreement between measurements occurred only when the humidity sensor was operating within a poorly defined portion of the calibration curve which was not suited to on-line calculations. The results indicate that the humidity sensor could be modified to allow operation at all times within well defined segments of the calibration curve and permit successful eddy correlation vapor flux measurements within one meter of the surface. (Key Words: Humidity sensor; eddy correlation; vapor flux)

Introduction

Of the micrometeorological methods currently available for determining evaporation, the eddy correlation approach is most satisfying since it requires the least number of basic assumptions. The equation which describes the evaporation as latent heat flux density, may be written as

$$F_v = \lambda [\bar{q} \bar{w} + \overline{q'w'}] \quad (1)$$

where λ is the latent heat of vaporization, q is vapor concentration (absolute humidity) and w is the vertical wind velocity. The overbars indicate time averages and the primes indicate fluctuations about the mean. The surface evaporation, E , will be equal to

$$E = \lambda [\overline{q'w'}] \quad (2)$$

when \bar{w} is equal to zero.

Although eddy correlation measurements of sensible heat flux have been made [Kaimal and Businger, 1963; Businger, et al., 1967; Wesely, Thurtell, and Tanner, 1969] evaporation measurements have been limited by slow humidity sensors. Dyer and Hicks [1967] and Goddard and Pruitt [1966], using fine-wire psychrometers, found that measurement at four meters was necessary where larger and slower eddies could be recorded by these relatively slow elements. At these elevations, however, storage and advection errors occurred unless there was a very long fetch. In order to work closer to the ground, we have investigated the possible

use of a rapid-response barium fluoride film humidity sensor [Jones, 1967]. Bean and Florey [1968] report on the use of this sensor for measuring evaporation at two meters above Lake Hefner. However, their system was limited by the relatively slow response of an anemometer-bivane and not by the humidity element's response. We believe that in association with a fast response wind vector sensor the barium fluoride film humidity sensor can allow measurement of evaporation considerably closer to the surface.

Instrumentation and Methods

Barium fluoride film humidity sensor. The barium fluoride humidity sensor consists of a glass plate of approximately $10 \times 2 \times 0.16$ cm on which a 0.3μ -thick film of barium fluoride has been evaporated over closely-spaced, evaporated chromium electrodes. The electrical resistance is measured between the electrodes. Jones [1967] reports in detail on these sensors and their properties.

The particular elements used in the present work are calibrated by determining their resistances over a series of known relative humidity solutions from 12 to 97%. Plots of the logarithm of sensor resistance against relative humidity consist of three linear segments. Unfortunately, sensor calibration is not stable for an unlimited time and degrades substantially over a period of several months. Calibration curves indicating changes over time are shown in Figure 1.

In order to use relative humidity measurements in the eddy correlation method, a reference temperature must be measured. During preliminary tests at Davis, California

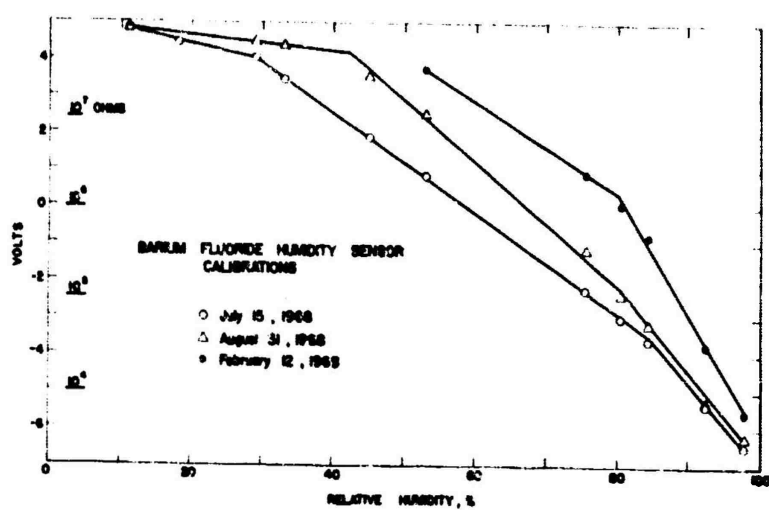


Fig. 1. Calibration curves for a barium fluoride film humidity sensor showing changes with time.

in 1967, we used the air temperature; the results showed that the sensor film temperature should be used as the reference for converting relative humidity to absolute humidity and must be monitored. Accordingly, a 127 μ micro-bead thermistor is cemented with a very small amount of clear epoxy to the center of the sensitized surface. A linearized bridge is used with the thermistor for the surface temperature measurement.

The sensors also have electrical leads cemented to them. Vapors from the epoxy used to attach the leads and thermistors caused an immediate calibration shift, and it is possible that the drifts shown in Figure 1 were accelerated by the early exposure to organic vapors.

Electronic circuitry. A block diagram of the circuit used with the barium fluoride humidity sensor and its associated thermistor is shown in Figure 2. The two most important features of the system are the logarithmic amplifier and the phase adjustment. The logarithmic amplifier provides an output voltage that is linear with relative humidity as shown in Figure 1. The phase adjustment is necessary because at low humidities, and with very high sensor resistances, there is significant capacitive reactance. The phase is adjusted to null the capacitive reactance while the sensor is at very low humidity over a desiccant; no further adjustment is required throughout the full humidity range. The capacitive reactance is associated with the linear segment at the lowest humidities of the calibrations curves of Figure 1. The importance of this segment with its relatively flat slope and its shift to higher relative humidity ranges with time becomes a problem as discussed later.

Eddy correlation system. The fluctuating wind vector needed in (2) is measured with the pressure sphere anemometer,

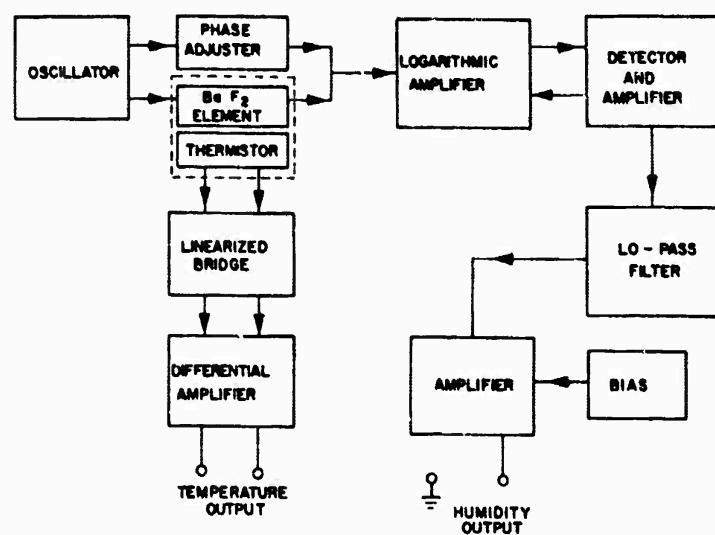


Fig. 2. Block diagram of circuit used with barium fluoride film humidity sensor and its associated thermistor.

details of which are reported by Thurtell, et al., (1969). The barium fluoride humidity sensor is mounted to the side of pressure sphere anemometer and a fine-wire resistance thermometer is mounted on the other side (Figure 3). The thermometer provides air temperatures which, when used in the heat equation analogous to that of (2), gives the sensible heat flux density (Wesely, et al., 1969). Figure 4 gives a plan view of locations of the various components. In addition, and not shown in Figures 3 and 4, a small sunshade was elevated 15 to 20 cm above the humidity sensor. The shade was used since radiational heating often caused sensor temperatures to rise as much as 10 C above air temperature, which, in turn, caused the effective relative humidity of the sensor to fall into its least sensitive, very dry, range (above or near knee in Figure 1).

We anticipated that the spatial grouping of sensors was small enough and the sensors had sufficiently high frequency responses to measure transport occurring in small, high-frequency eddies found within one meter of the surface.

Calculations were made on-line by transmitting analog voltages of relative humidity, sensor surface temperature, and anemometer pressures to an analog to digital converter and an Electro-Mechanical Research 6130 computer (8001 Bloomington Freeway, Minneapolis, Minn. 55420) housed in an instrument trailer. Sampling rate was 150 times per second with data acquisition for 28.5 minutes of each half hour and summary data calculations and typewriter output for the remainder of the time.

A servo-mechanism rotated the instrument system assembly into the wind as wind direction changed. Therefore,

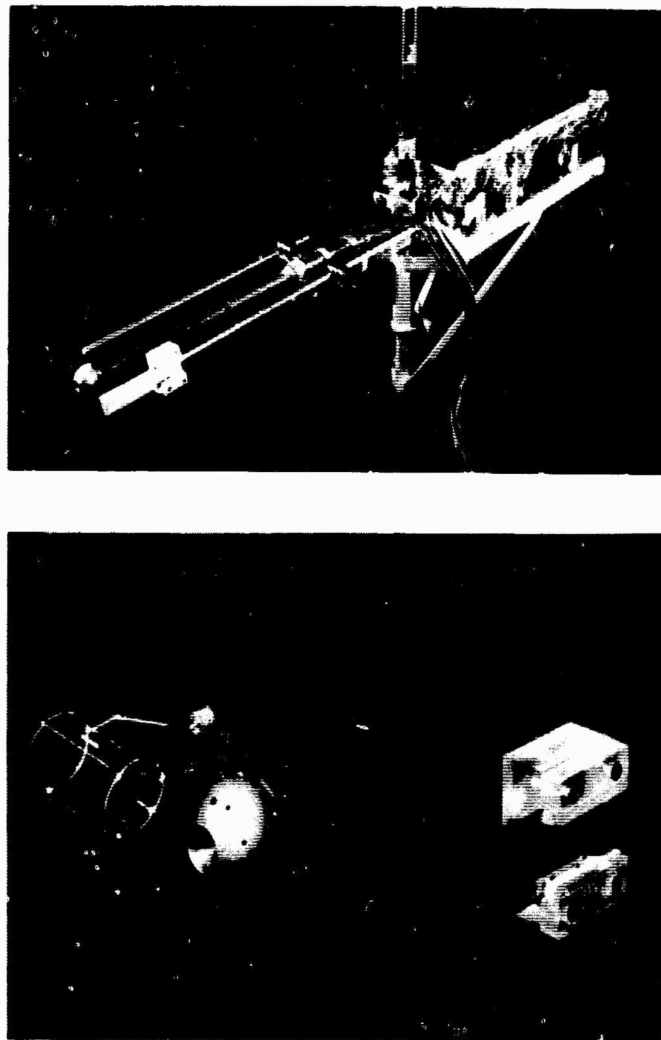


Fig. 3. (Upper) Entire eddy correlation system.
(Lower) Close view of sensors.

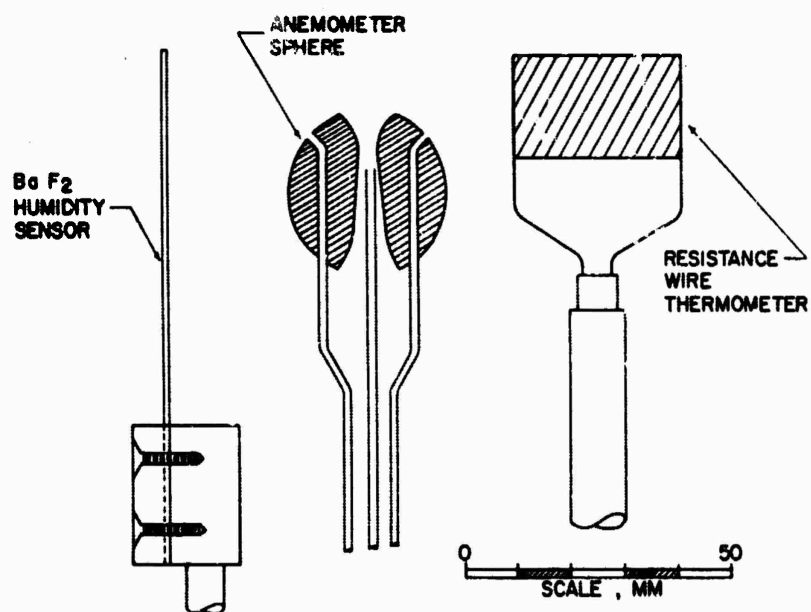


Fig. 4. Plan of system components.

data was acquired automatically, except for sunshade adjustment, gain adjustments, and equipment maintenance which were done during data printout.

Field trial site. During September 1968, vapor flux measurements were made at Hancock, Wisconsin over snap beans (*Phaseolus vulgaris*), which were 30 cm high. A pressure sphere anemometer with humidity sensor was located 60 m south of the instrument trailer with a bean fetch of 60 m to the north, 50 m to the east and west, and 100 m to the south. A 100 m to 200 meter fetch of alfalfa-brome pasture extended beyond the beans to shelter belts which were 15 meters high. A second anemometer without a humidity sensor was located 10 m west of the previously described site.

The instruments at the humidity sensor site were at an initial elevation of 1.17 m above ground surface. This elevation was maintained until 1030 on the 14th when it was raised to 2.10 m. The 2.10 m elevation was lowered to 0.75 m following 0630 on September 15. On September 20 the elevation was 1.17 m. The changes in elevations were used to try to detect the affect of eddy size and frequency on sensor response.

Additional site instrumentation provided two other measurements of latent heat flux density for comparison with the eddy correlation data. One was evapotranspiration measured with a hydraulic load-cell lysimeter [Black, et al., 1969]. The other measurement was made using the energy balance equation

$$E = R_n - G - H_a \quad (3)$$

The net radiation, R_n , was measured with a Funk net

radiometer, the soil heat flux density, G , was measured using soil heat flux plates in conjunction with thermometers, while the sensible heat flux density, H_a , was obtained from the average of the two eddy correlation measurements [Wesely, et al., 1969].

Results

Half-hourly values of latent heat flux density from (2), (3), and the lysimeter are compared in Figure 5 for September 12, 13, 14, and 20. On September 20 energy balance data were unavailable. This figure also shows half-hourly mean values of relative humidity as measured by the barium fluoride sensor and wind speed measured by a cup anemometer mounted at 1.32 m approximately 25 m southwest of the eddy correlation sites.

Several conclusions can be drawn from these comparative data. First, there is excellent general agreement both in trends and in magnitude between the lysimeter and the energy balance data; this confirms the validity of our independent measurements used for comparisons. Secondly, for the most part, the eddy correlation data prior to 1000 and past 1600 on each day show good agreement with the other two sets of evaporation data, while during the mid-day period they are one-half to one-third the other data. Thirdly, during data collection at elevations of 1.17 m to 2.1 m, no apparent systematic differences could be detected in sensor response by comparison with the independent methods. Figure 5 presents no data for the 0.75 m elevation since only two hours of morning data were collected, but these limited data are also in good agreement with the independent measurements. Fourthly, although wind speed is correlated with eddy

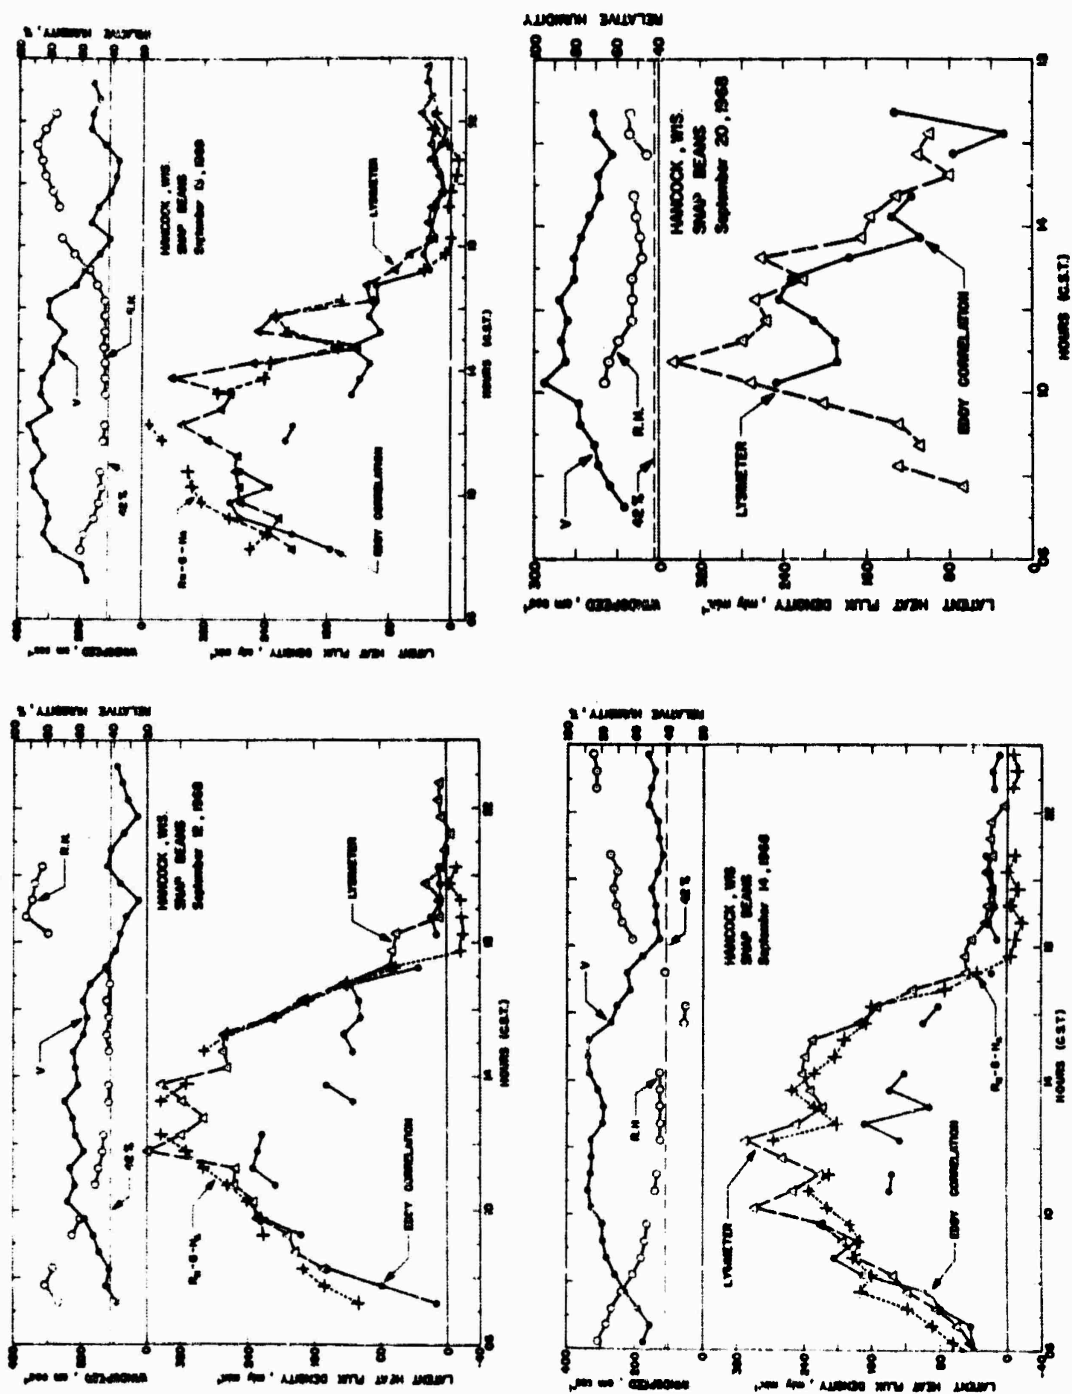


Fig. 5. Diurnal trends of latent heat flux density from eddy correlation measurements, from energy balance and lysimeter data, and diurnal trends of windspeed and relative humidity.

frequency, there was no association between periods of either good or poor agreement and windspeed. Finally, there is a strong correlation between periods of poor agreement and mean relative humidities, as seen by the sensor, of less than about 45 percent.

In Figure 1 the August 31, 1968 calibration curve shows a sharp break in slope at 42 percent relative humidity. This critical value was determined by extrapolation, while the actual change was most probably a gradual one over a ΔRH range of 8 to 10 percent. The slope of the calibration curve is one of the constants required for the on-line computer program, and during periods when the mean relative humidity was near the knee of the calibration curve, vapor flux density could not be satisfactorily computed. Figure 5 shows that all periods of poor agreement occur when the mean relative humidity was less than or only slightly in excess of the critical value, 42 percent. A portion of this decrease in sensor-perceived relative humidity during mid-day periods is attributed to radiational heating. As wind direction and sun angle varied, the small sunshade in a fixed position relative to the humidity sensor frequently did not shade the sensor. Visual inspection of shade orientation and adjustment of its position were possible only in the 1.5-min intervals at the end of each half-hour, and not during data collection.

The pressure sphere anemometer measurements associated with the humidity sensor gave a lower mean horizontal wind, and more negative $\rho \overline{w'v'}$ than those from the anemometer without a humidity sensor attached. We doubt that this was due to spatial heterogeneity of the row crop; it most likely was due to locating the barium fluoride element

too far forward (see Figure 4) where it interfered with the wind flow when wind was from the side. Any errors in the cross-wind measurement affect the wind coordinate transform.

Recommendations

The field measurements indicate that the barium fluoride film humidity sensor has sufficiently rapid response to allow reliable eddy correlation measurements of vapor flux within a meter or less of the surface. Modifications to the present system should be: (1) The sensor configuration should be changed from a plate to a cylinder, with cooling tubes inside the cylinder to maintain the sensor at or below ambient air temperature. Such a change would permit temperature control of the sensor so that the operating point on the calibration curve could be kept away from any "knee". The cylindrical configuration also should affect air flow around the sphere less than the plate. (2) Since the sensor calibration is altered by contamination with time, BaF_2 films should be applied as close as possible to time of use. The BaF_2 should be coated on elements to which thermistor and leads have been attached previously. Films should be recalibrated frequently during field use. (3) Further tests should be made of the optimum sensor location with respect to the pressure sphere to assure minimum interference. Certainly the forward end of the sensor should be behind the sphere. (4) Frequency characteristics of the sensor should be established to allow matching amplitudes and phase shifts to the wind measuring system.

REFERENCES

- Bean, B. R. and Q. L. Florey, A field study of the effectiveness of fatty alcohol mixtures as evaporation reducing monomolecular films, Water Resources Res., 4, 206-208, 1968.
- Black, T. A., G. W. Thurtell, and C. B. Tanner, Hydraulic load cell lysimeter, construction, calibration, and tests, Soil Sci. Soc. Amer. Proc., 32, 623-629, 1968.
- Businger, J. A., M. Miyake, A. J. Dyer, and E. F. Bradley, On direct determination of the turbulent heat flux near the ground, J. Appl. Meteorol., 6, 1025-1032, 1967.
- Dyer, A. J. and B. B. Hicks, The fluxatron -- a revised approach to the measurement of eddy fluxes in the lower atmosphere, J. Appl. Meteorol., 6, 408-413, 1967.
- Goddard, W. B. and W. C. Pruitt, Mass transfer-eddy flux methods, 42-44, in Evapotranspiration and its role in water resources management, Conf. Proc. Publ. by Amer. Soc. Agr. Eng., St. Joseph, Mich., 1966.
- Jones, F. E., Study of the storage stability of the barium fluoride film electric hygrometer element, J. Res. NBS, 71C, 199-207, 1967.
- Kaimal, J. C. and J. A. Businger, A continuous wave sonic anemometer-thermometer, J. Appl. Meteorol., 2, 156-164, 1963.
- Thurtell, G. W., C. B. Tanner, and M. L. Wesely, Three-dimensional pressure-sphere anemometer system, J. Appl. Meteorol., 8, (Submitted), 1969.
- Wesely, M. L., G. W. Thurtell, and C. B. Tanner, Eddy correlation measurements of sensible heat near the earth's surface, J. Appl. Meteorol., 8, (Submitted), 1969.

**A FAST-RESPONSE THERMOMETER
FOR EDDY CORRELATION MEASUREMENTS.**

M. L. Wesely, G. W. Thurtell, and C. B. Tanner

Eddy-correlation measurements of sensible heat flux close to the earth's surface require fast-responding, small thermometers; these can be made with fine resistance wire. Resistance thermometers with 13 μ diameter (e.g. McIlroy, 1955; Dyer and Maher, 1965; Hyson, 1968) have better frequency response and lower radiation errors than the commercially-available thermocouples which are 25 μ wire and may have junctions larger than 25 μ . If the resistance wire is less than 13 μ in diameter, the frequency response and radiation error is still less dependent upon wind speed than with 13 μ wire, and radiation error decreases. Because very fine wire thermometers have small radiation error, they can be used to measure average vertical temperature differences without radiation shielding or aspiration; however, in this instance the rapidly fluctuating thermometer output is filtered electrically.

The purpose of this note is to describe a fast, very fine wire thermometer which is constructed easily and which we have found useful for eddy correlation measurement within 0.5 to 1.0 m of the earth's surface (Wesely, et al., 1969).

1. Description and construction of the thermometer

The supporting structure of the thermometer, as pictured in Figs. 1 and 2, consists of the frame, the insulating plug, and the stainless steel supporting tube. The thermometer element consists of about 55 cm of platinum-coated, 5.6 μ -diameter, tungsten wire^{1/} wound

^{1/} Sigmund Cohn, Mount Vernon, N. Y. (0.00022-inch diameter, with about 4 to 7% weight platinum coating).

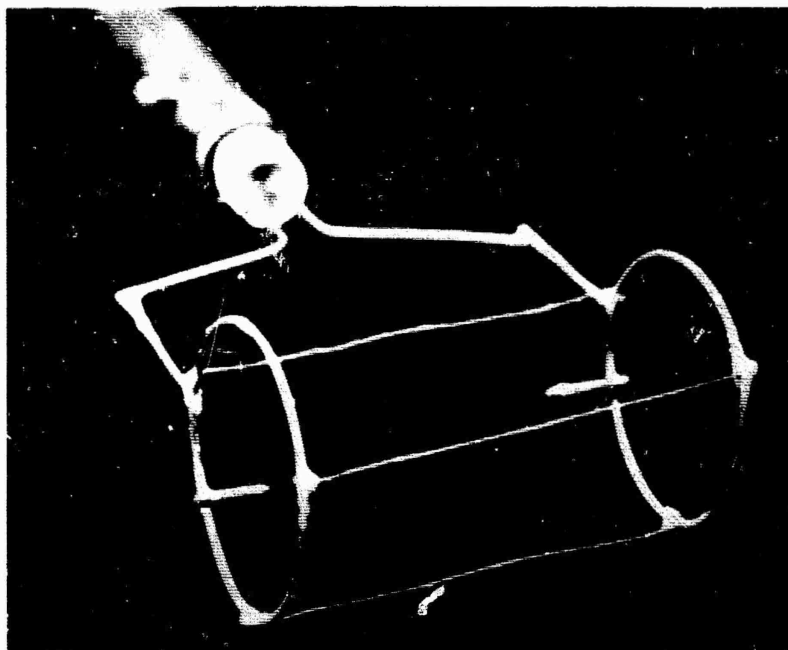


Fig. 1. Front view of the resistance thermometer.

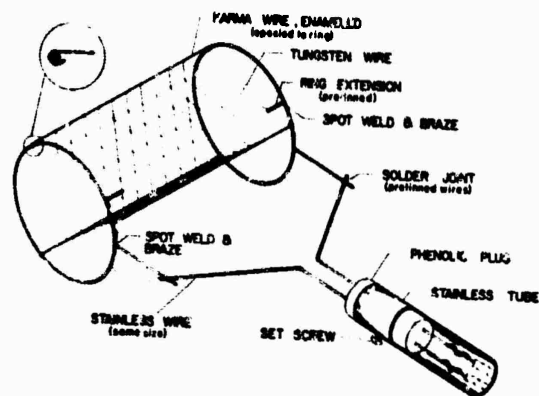


Fig. 2. Resistance thermometer details.

on the frame as shown.

a. Thermometer frame

The frame consists of three 0.16 mm (0.0063 inch) enameled Karma^{2/} wires which were epoxied to two rings constructed from 0.66 mm (0.0253 inch) stainless steel wire. These rings are 1.9 cm in diameter and spaced 3.2 cm. The resistance wire is soldered to two inward extensions of the rings. The rings and their extensions serve as electrical connections and provide mechanical support.

The rings are formed on a mandrel and spot-welded. The extensions are spot-welded to the rings and all the spot-weld joints are hard soldered. The extensions are pretinned^{3/}, which requires acid flux; when once pretinned future soldering operations may be done with neutral and rosin fluxes. Following pretinning, the stainless steel and any parts exposed to acid flux fumes must be thoroughly cleansed with soapy water and rinsed in distilled water.

^{2/} Driver Harris Co., Harrison, N. J.

^{3/} Eutectic Welding Alloys Corporation, Flushing, N. Y., EutecRod 157; All-State Welding Alloys Co., White Plains, N. Y., #430 solder.

b. Frame support

The frame support consists of the stainless steel tube (9.5 mm O.D. x 1.58 mm wall) and the insulating plug, which is held in the tube with a set screw. Two 0.66 mm diameter stainless steel leads are pretinned³/, washed, and epoxied in holes drilled in the plug. The stainless wires extend inside the tube, where they are soldered to copper leads and covered by heat-shrink tubing.

c. Winding the resistance wire

Tungsten was chosen as a thermometer wire because of its high tensile strength, but due to the small wire diameter, a load of only seven grams will break it. The wire is best seen against a dark background with proper lighting. When the resistance wire is wound on the frame, the frame is attached with clips to the end of a threaded arbor which has a pitch of 2.5 mm and which is fixed in a threaded nut. About 65 cm of the resistance wire is unspooled and cut with masking tape folded to the ends so it may be held. One end is soldered to one of the pretinned frame extensions and the other end, weighted with the masking tape, hangs free. As the arbor is turned the resistance wire is pulled through a stationary feed (needle with eye enclosure cut away) and wrapped around the frame, automatically spacing the windings at least 2.5 mm apart. Closer spacing may cause adjacent resistance wires to touch if the Karma wire flexes slightly. When ten windings are on the frame, the free end of the wire is soldered to the second extension. Before the wire is wound on the frame, the Karma cross-struts are coated either with

epoxy or with a silicone-base contact cement^{4/} to prevent the tungsten wire from sliding on the strut.

The platinum-coated tungsten resistance wire is soldered with a sonic soldering iron without flux to the pretinned frame extension using indium solder^{5/}. If a sonic soldering iron is not available, either a cut-acid, zinc chloride flux or an All-State neutral 420 flux can be used with the indium solder; however, the fluxless joint made with a sonic iron is preferable since no electrolytes are introduced. Satisfactory solder joints cannot be made with tungsten wire that is not coated with solderable metals.

To prevent misalignment of the fragile assembly after winding the wire, the frame should be attached immediately to the frame support.

2. Frequency response and radiation heating

Chao and Sandborn (1964) show that a resistance wire thermometer responds to a temperature change as a first-order system. For first-order systems the amplitude ratios and phase shift angles, θ , with sinusoidally fluctuating air temperatures are:

$$A/A_0 = (1 + \omega^2 \tau^2)^{-1/2} \quad (1)$$

$$A/A_0 = \cos \theta \quad (2)$$

^{4/} Mystik Tape, Inc., 1700 Winnetka Ave., Northfield, Ill. (Type A-117)

^{5/} Indium Corporation of America, Utica, N. Y., Indalloy solder #4, indium metal.

where τ is the time constant, ω is angular frequency, and A_0 is the output amplitude when $\omega = 0$.

Chao and Sandborn derive an expression for the time constant of a resistance wire, neglecting radiation exchange.

$$\begin{aligned} \tau^{-1} = & (k/\rho C) (\pi/L)^2 + (4/D^2) (hD)/\rho C \\ & - (\kappa/\rho C) (4/\pi D^2)^2 I^2 \end{aligned} \quad (3)$$

where k is the thermal conductivity of the wire, I the current through the wire, L and D are the wire length and diameter, ρ and C are density and specific heat of the wire, κ is the wire resistivity, and $h = (k_a/D) N_u$ where k_a is the thermal conductivity of air. The Nusselt number, N_u , for air in transverse flow can be found from

$$Nu = 0.3 + 0.51 Re^{1/2} \quad (4)$$

where Re is the Reynolds number. According to Grant and Kronauer (1962), the Nusselt number for our extremely fine, long wire would be slightly less than 0.3 in still air; however (4) is a sufficiently good approximation to calculate performance for field experiments.

The first term in the right side of (3) represents internal conduction along the wire to the supports and is negligible for long wires. The second term is proportional to the convection from the wire per unit temperature difference and is much larger than the last term, which indicates how the temperature of the wire

affects the time constant. When all of the values for our resistance wire are inserted into (3), it simplifies to:

$$\tau = 1/(1530 \text{ Nu} + 5.8) \quad (5)$$

For a given wind velocity, (5) can be used to calculate τ for the resistance wire; then (1) can be used to find the ratio of the amplitudes for a given frequency and (2) will give the phase shift. For the resistance wire used in the thermometer, the time constant was calculated to be about 1.5 msec in "still" air and 0.6 msec in 10 m sec^{-1} winds. In a laboratory relatively free of air currents, the time constant of the thermometer was observed to be about 1 msec. Up to a frequency of 20 Hz, reduction in amplitude should be less than 2% and phase shift about 10 deg. Even at 50 Hz, less than 10% reduction in amplitude and a phase shift less than 25 deg is expected.

The frequency response may be decreased and the phase shift may be increased by electrically filtering the analog signal from the thermometer bridge. This is necessary to match the response of a wind-measuring system when eddy correlation measurements are made or to average the signal when temperature gradients are measured. An advantage of the fine wire is that the effect of the wind speed upon τ is negligible compared to the total phase shift and degraded frequency response needed to match most eddy correlation wind systems.

Solar heating of the fine resistance wire on the thermometer must be dissipated by convective transport. Neglecting other sources of heating, the steady state

energy balance can be expressed as

$$R_s(1-a_s)DL = hD\pi L(T-T_a) \quad (6)$$

where R_s is the solar radiation and a_s is the absorptivity for solar radiation. Since this equation is for the radiation being absorbed uniformly over the entire cross-section of the wire and no radiation losses, the calculated temperature difference will be an overestimate.

Using an extreme value of 1400 W m^{-2} for R_s and 0.5 for a_s temperature differences for the fine resistance wire are about 0.15°C in still air, 0.09°C in 0.5 m sec^{-1} wind, and 0.05°C in a 5 m sec^{-1} wind. Thus, it is conceivable that radiation could cause the wire to heat up as much as 0.1°C , but a wind gust would not change this offset by more than a few hundredths of a degree Celsius. This change is negligible for eddy heat flux calculations, and often is not significant when mean air temperature differences are needed, provided all the thermometers are exposed equally to radiation.

3. Bridge design criteria

The temperature coefficient of resistance of the wire was determined by measuring the thermometer resistance in a temperature-controlled kerosene bath; it was found to be $0.360\% \text{ } ^\circ\text{C}^{-1}$ at 20°C , and $0.350\% \text{ } ^\circ\text{C}^{-1}$ at 30°C . The 55 cm of resistance wire wound on each thermometer spool had a total resistance of about 1550 ohms, which increased with temperature at the rate of about $5.5 \text{ ohms } ^\circ\text{C}^{-1}$ at 25°C .

The thermometer is measured in a constant-current bridge, with the current low enough for negligible

self-heating. Since the Nusselt number calculated by (5) for 5.6μ wire only doubles as the wind velocity changes from still air to a 5 m sec^{-1} wind, the effect of convective heat transfer on self-heating is weak. In still air, the maximum current allowable for less than 0.01°C temperature rise is 0.33 ma . This value increases to 0.35 ma in a 0.5 m sec^{-1} wind, and to 0.50 ma in a 5 m sec^{-1} wind. If the current were 0.30 ma , the temperature difference would be less than 0.01°C and would change by about 0.004°C as the wind changed from 0.5 m sec^{-1} to 5 m sec^{-1} .

In our bridge we use a 16.2 V mercury battery (two 8.1 V , TR-236R) across a 40 k ohm resistance in series with the thermometer. Fixed resistors of similar value and a potentiometer for balancing form the other half of the bridge. The bridge output is $0.60^\circ\text{C mv}^{-1}$. When two thermometers are used to measure vertical temperature differences for Bowen's ratio measurements the second half of the bridge also is a 40 k ohm resistance in series with the thermometer; the 40 k ohm resistance is comprised of a fixed resistor and a potentiometer to obtain balance. When used for measuring vertical temperature differences, the thermometers are mounted on a stand which interchanges their position periodically to obviate zero errors (Sargeant and Tanner, 1967).

REFERENCES

- Chao, J. L., and V. A. Sandborn, 1964: A resistance thermometer for transient temperature measurements. Fluid Mechanics Paper No. 1, Colorado State University, Fort Collins, Colo.
- Dyer, A. J., and F. J. Maher, 1965: Automatic eddy-flux measurements with the evapotron. J. Appl. Meteor., 4, 622-625.
- Hyson, P., 1968: The tungsten wire temperature sensor. J. Appl. Meteor., 7, 684-690.
- McIlroy, I. C., 1955: Australian J. Agr. Res., 6, 196-199.
- Sargeant, D. H., and C. B. Tanner, 1967: A simple psychometric apparatus for Bowen ratio measurements. J. Appl. Meteor., 6, 414-418.
- Wesely, M. L., Thurtell, G. W. and C. B. Tanner, 1969: Eddy correlation measurements of sensible heat flux near the earth's surface. J. Appl. Meteor., 8, (Submitted)

**SENSIBLE HEAT FLUX MEASUREMENTS
WITH A YAW SPHERE AND THERMOMETER**

C. B. Tanner and G. W. Thurtell

1. Introduction

A yaw sphere, shown schematically in Fig. 1, when directed into the wind flow, generates a pressure between the ports proportional to the product of the horizontal and vertical winds. If this pressure is measured with an electrical pressure transducer and if the analog pressure signal then is passed through a high-pass filter to drive a resistance thermometer bridge, the bridge output is proportional to $\bar{u}(w'T')$. The sensible heat flux density can be determined by integrating the bridge output and dividing the mean, $\bar{u}(w'T')$, by the mean wind speed measured with a nearby cup anemometer.

The objective of this note is to describe this analog system for sensible heat flux measurement and to present some comparisons with independent measurements of sensible heat flux density.

2. Equipment description

The description of the equipment is helpful to a discussion of the theory and is given first.

a. Yaw sphere, vane, and pressure system

The yaw sphere was made by drilling two 1.59-mm holes off-center through a 5-cm plastic sphere so that the included angle, θ , between radius vectors to holes on the sphere surface was 45° . The sphere was mounted on a 6.35-mm O.D. tubular stem inserted in the head of a Gill propeller vane where the propeller normally mounts, (Fig. 1). Two 1.59-mm I.D. polyethylene tubes were run through the stem and down the center of the hollow, rotating shaft in the Gill propeller vane that drives the azimuth potentiometer. These polyethylene tubes were

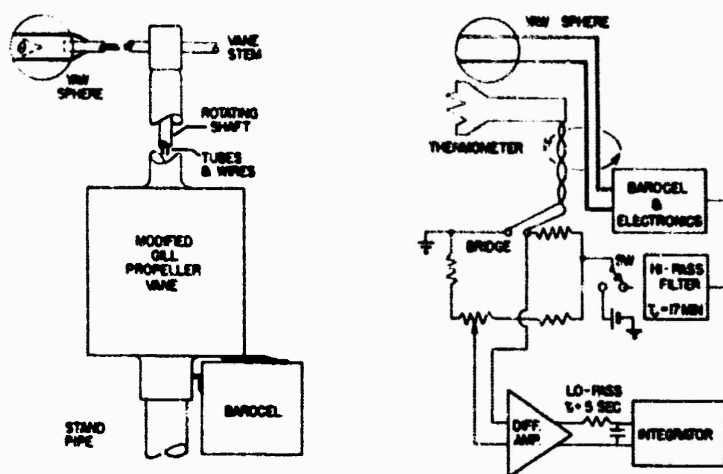


Fig. 1. Schematic of the yaw sphere on a vane and of the recording system.

brought out through the bottom of the vane housing and attached to a Datametrics, Model 511-8 Barocel capacitive pressure transducer. A 1-m length of 1.59-mm I.D. tubing was required to connect each sphere port to the pressure transducer. A fast resistance thermometer (Wesely, et al., 1969a) was mounted on vane head and located at the side of sphere as described by Wesely, et al. (1969b). The thermometer leads were run in parallel with the pressure tubing out the bottom of the vane housing to the thermometer bridge.

Although Wesely, et al. (1969b) adjusted the frequency response of the thermometer bridge amplifier to match that of their pressure-sphere anemometer, this would have complicated our simple analog system; accordingly the yaw-sphere and thermometer have different phase and frequency response. The frequency response of the yaw sphere is indicated in Table 1. The thermometer relative amplitude at 20 Hz is about 0.98 with 1 m sec^{-1} winds and the phase shift is about 10° . Details of the pressure transducer system and frequency response calibration methods can be found in Thurtell, et al. (1969).

Table 1. Frequency response of the yaw sphere, tubing and Barocel.

Frequency, Hz:	2	4	10	15	20
Relative amplitude:	1.0	1.0	0.83	0.63	0.46
Phase shift, degrees:	5	15	35	50	60

b. Electronics and recording

The output from the Barocel and its signal conditioner is the electrical analog of the pressure, ΔP , between the yaw sphere ports. This signal is passed through a high-

pass filter with a 17-min time constant and unity gain. The output of the high-pass filter is an analog of $(\Delta P - \overline{\Delta P})$. This signal drives the thermometer bridge so that the output is an analog of $\Delta T(\Delta P - \overline{\Delta P})$ where ΔT is the bridge temperature unbalance. If the bridge is set at a null temperature very different from the air temperature so that a large unbalanced offset appears in ΔT , the peak-to-peak range of the fluctuating bridge output is unduly large and may saturate the following electronics. To facilitate balancing the bridge, it can be switched from the high-pass filter to a battery. The output of the bridge is fed to a differential amplifier and thence to either an electronic integrator or a recorder with ball-and-disc integrator. The integrator is preceded by a 5-sec low-pass filter to decrease the transient response and dynamic range requirements.

3. Theory of operation

The pressure distribution at points on a sphere in a perfect fluid with irrotational motion is given by Lamb (1932; sec. 92) as

$$P = P_s + (\rho/2)V^2[1 - (9/4)\sin^2\psi] \quad (1)$$

where P_s is the static pressure, ρ is the density of air, V is the air speed, and ψ is the angle between \vec{V} and the radius vector of the point. Schlichting (1960, p. 20) shows that in real fluids, the pressure distribution is that of ideal fluids for $\psi \lesssim 65^\circ$. If the yaw sphere is directed azimuthally into the wind, then the pressure difference between the ports of the yaw sphere is

$$\Delta P = P_2 - P_1 = (9\rho/8)|\vec{V}|^2(\sin^2\psi_1 - \sin^2\psi_2)$$

This holds for winds within a vertical angle $\alpha = \pm(65^\circ - \frac{1}{2}\theta)$ where α is the angle between the wind vector and the bisect of the ports and θ is the included angle between the ports. Assuming that the vane directs the sphere into the wind, the components of the wind vector with respect to the x,z plane formed by the ports and the stem are

$$u = |V| \cos\alpha \quad (2a)$$

$$v = 0 \quad (2b)$$

$$w = |V| \sin\alpha \quad (2c)$$

Since $\psi_1 = (\alpha + \frac{1}{2}\theta)$ and $\psi_2 = (\alpha - \frac{1}{2}\theta)$

$$\Delta P = (9/4) (\sin \theta) \rho u w \quad (3)$$

The electrical output of the pressure transducer is

$$E_p = M(\Delta P) = b M \rho u w$$

where $b = (9/4 \sin \theta)$ and M is the transducer constant. The output of the high pass filter is

$$E_F = E_p - \overline{E_p} = M(\Delta P - \overline{\Delta P}) \quad (4a)$$

Substituting (3) into (4a), and using Reynold's notation

$$E_F = b M \rho (\overline{uw'} + \overline{wu'} + \overline{u'w'} - \overline{u'w'}) \quad (4b)$$

Since $\Delta T = \overline{\Delta T} + \Delta T' = \overline{\Delta T} + T'$, where $\overline{\Delta T}$ is the mean bridge balance offset, the output of the bridge is

$$E_B = BE_F \Delta T = BE_F (\overline{\Delta T} + T') \quad (5)$$

where B is the bridge constant. The amplifier output is then

$$E_0 = G E_B \quad (6)$$

where G is the amplifier gain. When E_0 is integrated we have from (4), (5), and (6),

$$\overline{E_0} = bGBM_0 (\bar{u} \overline{w'T'} + \bar{w} \overline{u'T'} + \overline{u'w'T'}) \quad (7)$$

Assuming the last two terms in parentheses in (7) are negligible as compared with the first, the product of the sensible heat flux and the mean wind is

$$\begin{aligned} \bar{u}H &\approx \rho c_p (\bar{u} \overline{w'T'} + \bar{w} \overline{u'T'} + \overline{u'w'T'}) \\ &= c_p \overline{E_0} / bGBM \end{aligned} \quad (8)$$

If a cup anemometer is run near the yaw sphere-thermometer assembly at the same height to find \bar{u} ,

$$H \approx c_p [(9/4)GBM \sin\theta]^{-1} (\overline{E_0} / \bar{u}) \quad (9)$$

4. Measurements

Sensible heat flux density measurements were made with the yaw sphere and thermometer during three days in September 1968 at Hancock, Wisconsin. The yaw sphere was about 95 cm above a crop of snap beans. We integrated E_0 with a ball-and-disc on a strip chart recorder which also

gave a record of E_0 . We used (9) to find the heat flux where $\theta = 45^\circ$ for our sphere. The mean wind speed was measured with a cup anemometer mounted at about the same height and located 15 m from the yaw sphere. We compared the results with eddy correlation measurements of sensible heat flux density made with a three-dimensional pressure-sphere anemometer in combination with a fast thermometer. We also compared the results with energy balance measurements, where the sensible heat flux density was found by subtracting measured soil heat flux density and evaporation from the net radiation. Wesely, et al. (1969b) describe the site, the pressure sphere anemometer and thermometer measurements and the energy balance measurements.

All measurements are given in Fig. 2 for three periods. The fluctuation of the energy balance measurements is mainly due to the lysimeter, which is not well suited to measuring evaporation over periods as short as 30 min when peak evaporation is equivalent to 250 w/m^2 . Also any phase differences in the three heat flux terms can make for large relative errors in sensible heat; this is particularly evident around 1800 hours.

The yaw sphere-thermometer results generally are higher than the other two measurements. The difference between yaw sphere-thermometer data and that of the other methods corresponds more nearly to a zero offset than to a proportionality factor. A damaging zero offset could easily arise since the mean bridge output voltage was of the order of 80 to 120 μv during periods of high sensible heat flux. In the equipment, which we jerry-rigged hurriedly for this test, there were two possible sources of zero error: no particular precaution was taken to avoid thermal emf's in the bridge; also in the

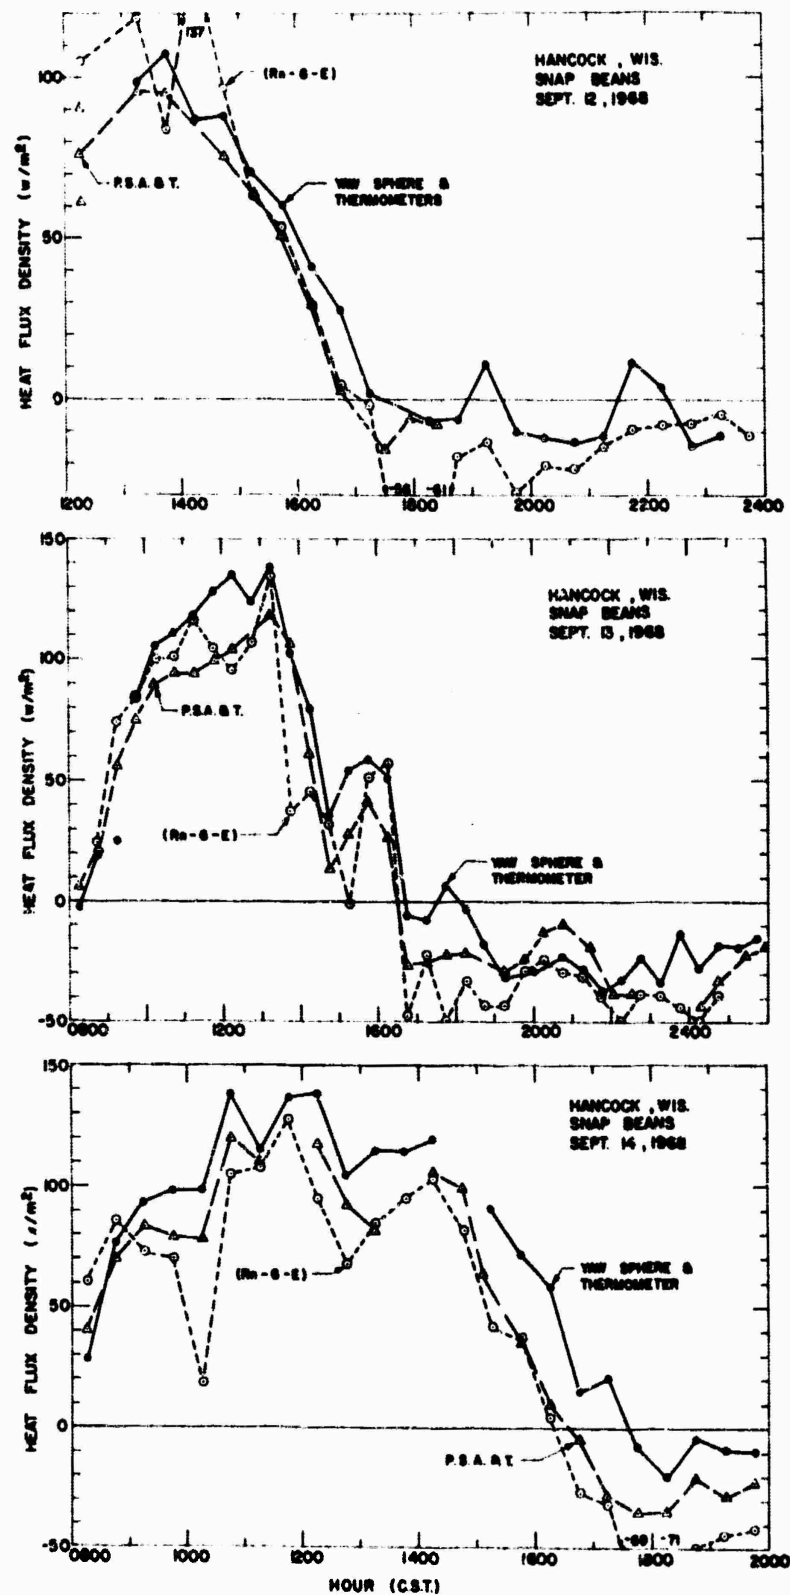


Fig. 2. Sensible heat flux density from the yaw sphere and thermometer system, energy balance measurements, and from the three-dimensional pressure sphere anemometer and thermometer system.

constructing of the active, high-pass filter, no special attention was given to avoiding small d-c components in the output, and any d-c across the unbalanced thermometer bridge would result in a zero offset. These features of the system can be improved relatively easily.

In view of the success of the preliminary tests of this simple yaw sphere-thermometer system, we believe it holds high promise for routine measurements of sensible heat flux density as close to the ground as one-meter where other eddy correlation systems are not suitable.

REFERENCES

- Lamb, H., 1932: Hydrodynamics. Dover, N. Y. 738 p.
- Schlichting, H., 1960: Boundary layer theory. McGraw-Hill, N. Y. 647 p.
- Thurtell, G. W., C. B. Tanner, and M. L. Wesely, 1969: Three-dimensional pressure-sphere anemometer system. J. Appl. Meteor., 8 (submitted).
- Wesely, M. L., G. W. Thurtell, and C. B. Tanner, 1969a: A fast-response thermometer for eddy correlation measurements. J. Appl. Meteor., 8 (submitted).
- Wesely, M. L., G. W. Thurtell, and C. B. Tanner, 1969b: Eddy correlation measurement of sensible heat flux near the earth's surface. J. Appl. Meteor., 8 (submitted).

ANEMOCLINOMETER EQUATIONS AND COMPUTER PROGRAM

The instrument, shown in Figures 1 and 2, consists of a spherical head, 3 cm in diameter, mounted on a supporting shaft. When in use the probe is fixed in the fluid, with the shaft axis parallel to the direction of mean flow and the sphere on the upstream end of the shaft. In the following discussion, all coordinate axes, planes, and the velocities are referenced to the ports in the anemoclinometer head and the anemoclinometer axis.

The static pressures developed between small holes drilled in the spherical probe head are measured (Figure 2). The pressure difference between the two holes in the x-z plane is measured and also between the two holes in the x-y plane; each of these four holes is drilled at a 45° angle to the axis of the shaft. In addition to the above pressure ports an upstream opening in the spherical head leads into a Venturi centered on the axis of the shaft. A small pressure tube is placed in this Venturi, parallel to the probe shaft, with its open end in the upstream direction. The pressure difference is measured between the pitot and eight reference ports on the surface of the spherical head, which are located on a circle at an angle of 47.5° to the shaft axis.

The instantaneous velocity component along the z-axis and normal to the shaft in the x-z plane of the two vertical ports (plane Z, Figure 2) is defined as w. The velocity components in the x-y plane of the two horizontal ports (plane Y, Figure 2), are u and v, with u as the component parallel with the shaft (x-coordinate) and v as the component normal to the shaft in the x-y plane (y component). The equations for the velocity vectors with respect to the anemoclinometer coordinates are

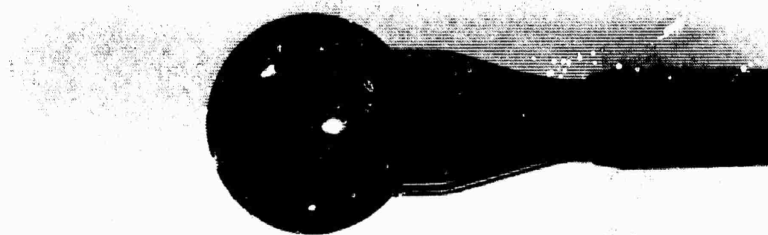


Fig. P1. Spherical sensing head of anemoclinometer showing pressure ports.

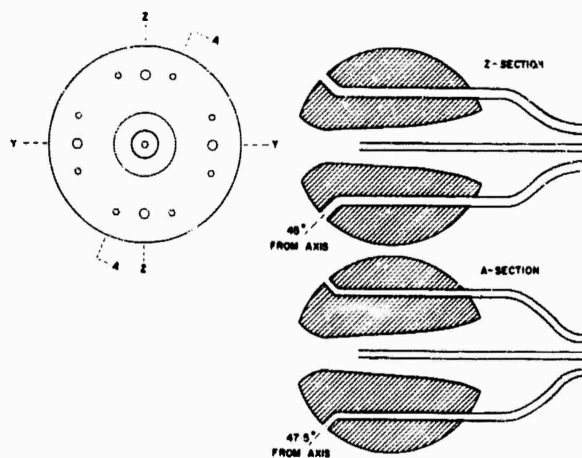


Fig. P2. Front and cross-section views of anemoclinometer head, y- and z-coordinates shown on front view.

$$u = |\vec{V}| \cos F' \cos G \approx |\vec{V}| \cos F' \cos G' \quad [1a]$$

$$v = |\vec{V}| \cos F' \sin G = |\vec{V}| \sin G' \quad [2a]$$

$$w = |\vec{V}| \sin F' \quad [3a]$$

$$|\vec{V}| = (u^2 + v^2 + w^2)^{1/2} \quad [4a]$$

where F , and G are the elevation and azimuth angles projected on the x,z and x,y planes and F' and G' are complements of the directional angles as shown in Figure 3. We can find

$$F' = \arctan [\tan(F \cos G)] \approx F \cos G \quad [5a]$$

The approximations in [1a] and [5a] result in less than 5% error at angles equal to or less than 30° .

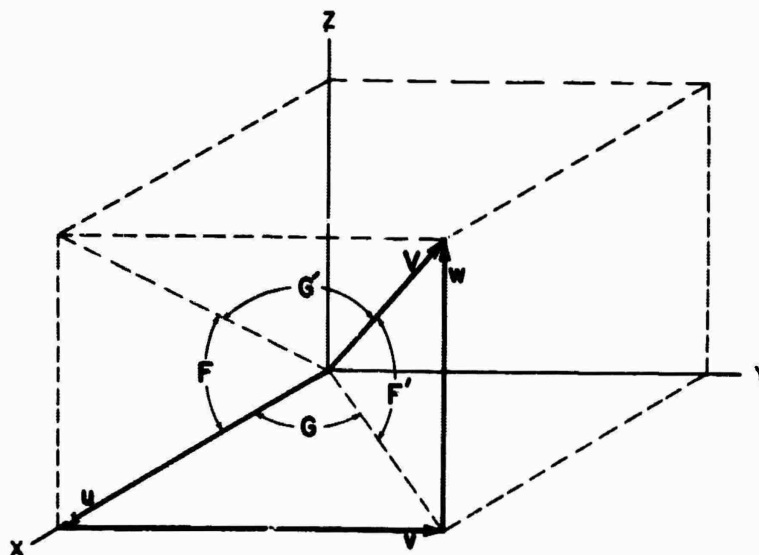


Fig. P3. Definition of the components u , v , and w of the total wind vector \vec{V} ; the elevation and azimuth angles, F' and G' , which are complements of the directional angles; and F and G , which are the projections of F' and G' on the x,z and x,y planes respectively.

Anemoclinometer Constants (30-mm Sphere)

The pressure P_V , measured between the pitot and the reference ports is related to the true dynamic pressure, P_0 , as

$$P_V/P_0 = a \quad [6a]$$

where $P_0 = (\rho/2)\bar{V}^2$ and where the first anemoclinometer constant, a , is close to 1.015 for the 3-cm anemoclinometer.

When the centerline of the uv ports (anemoclinometer axis) is at an angle, F , with respect to the mean flow ($G = 0$ in Figure 3) a pressure, P_F , is developed between the ports, where

$$P_F = b\alpha uv \quad [7a]$$

where b is approximately constant, and is near 1.70 for the 3-cm anemoclinometer when $2000 < Re < 200,000$.

The ratio of P_F/P_V changes linearly with angle ($F \leq 20^\circ$) as shown in Figure 4.

$$(P_F/P_V)/F = c = 0.057/\text{deg} = 3.266/\text{rad} \quad [8a]$$

where c is the third probe constant.

Note that equations analogous to [7a], and [8a], exist for the uv ports upon rotation through an azimuth angle, $G \leq 20^\circ$, when $F = 0$

$$P_G = b\alpha uv \quad [9a]$$

$$(P_G/P_V)/G = c = 0.057/\text{deg} = 3.266/\text{rad} \quad [10a]$$

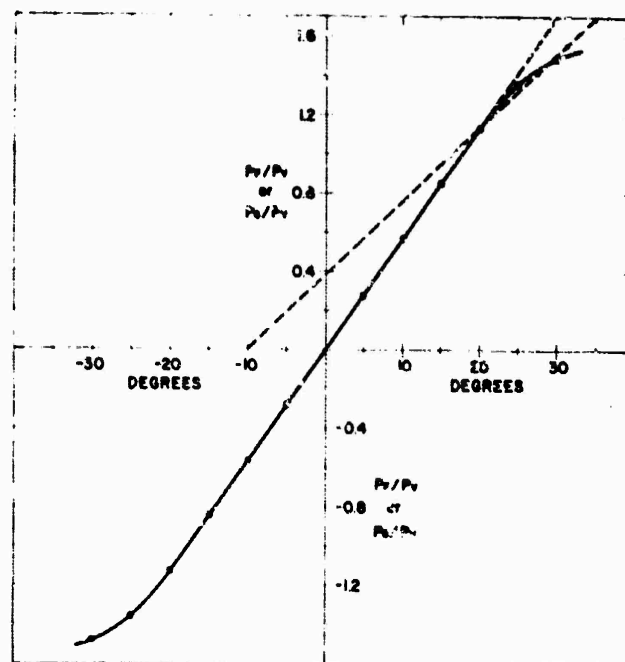


Fig. P4. Variation of (P_F/P_V) as angle F is changed with angle $G = 0$, or of P_G/P_V as angle G is changed with $F = 0$.

The above F, G angle relations hold for the linear region of Figure 4 until the velocity vector is 20° off axis. Beyond 20° , the relation is approximated by

$$F = c'_1 (P_F/P_V) - c'_2 \quad [11a]$$

which can also be written as

$$F_2 = c_1 F_1 - c_2 \quad [12a]$$

where $F_1 = (P_F/P_V)/c$. Similarly,

$$G_2 = c_1 G_1 - c_2 \quad [13a]$$

where $G_1 = (P_G/P_V)/c$. In [12a] and [13a], c_1 and c_2 have values of $c_1 = 1.500$ and $c_2 = 10 \text{ degrees} = 0.1745 \text{ rad}$. Equations [12a, 13a] are shown by the dashed line in Figure 4. Other approximations can be used, but since accuracy at F_2 or G_2 greater than 30° is poor, there is little basis for choice.

Wind Component Calculations

To find u , v , w using [1a, 2a, 3a], we find V from [6a] and find F' and G' from calibration curves provided by the Institute de Mecanique des Fluides de Lille (IMFL) for their anemoclinometers (Figure 5). These curves give the variation of (P_F/P_V) and (P_G/P_V) for winds which are outside of the x, z and the x, y planes. IMFL does not specify whether the symmetric angles in Figure 5 are the angles F and G projected on the x, z and x, y planes or if they are F' and G' , which are complements of the directional angles (see Fig. 3). We have assumed that F' and G' were the appropriate angles^{1/}.

^{1/} If F and G were the correct angles then [5a] would be used to determine the angles F' for use in [1a, 2a, and 3a]. We believe the choice of F' and G' is correct because if we had used F and G , the values of w and v at $F = G = 30^\circ$ would have been about 10% smaller than if F' and G' had been used and 5% smaller at $F = G = 20^\circ$. Our calculations of shear stress which used F' and G' , never appear systematically large as would be the case if F were the correct angle.

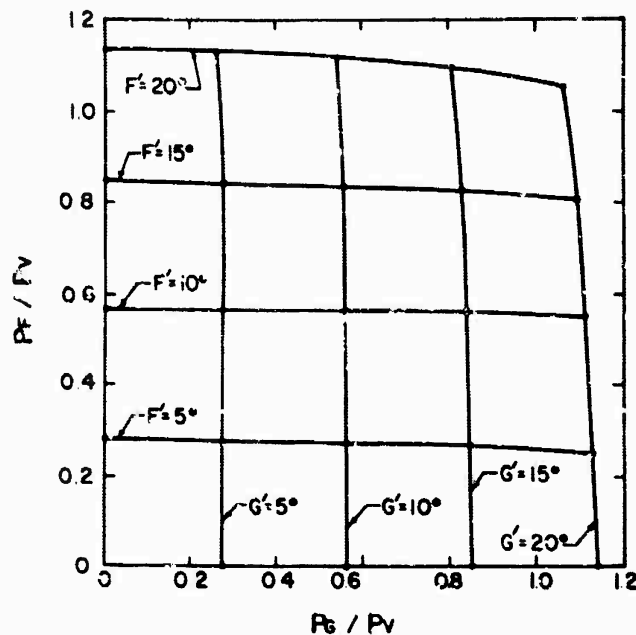


Fig. P5. Variation of (P_F/P_V) and (P_G/P_V) as both F and G vary.

The experimental data for anemoclinometers shown in Figure 5 indicates that the (P_F/P_V) at any angle G' is related to that for $G' = 0$ as

$$(P_F/P_V)_{G'} = \cos G' (P_F/P_V)_{G'=0}$$

Similarly,

$$(P_G/P_V)_{F'} = \cos F' (P_G/P_V)_{F'=0}$$

using [8a] and [10a] we have

$$F' = (P_F/P_V)/c \cos G' \quad [14a]$$

$$G' = (P_G/P_V)/c \cos F' \quad [15a]$$

We find F' and G' by iteration:

- Step 1: An angle F'_1 is found from [8a].
- Step 2: An F'_2 is found from [12a] if $F'_1 > 20^\circ$;
if $F'_1 \leq 20^\circ$, $F'_2 = F'_1$
- Step 3: Using $\cos F'_2$, G'_1 is found from [15a].
- Step 4: A G'_2 is found from [13a] if $G'_1 > 20^\circ$;
if $G'_1 \leq 20^\circ$, then $G'_2 = G'_1$.
- Step 5: Using $\cos G'_2$, F'_3 is found from [14a].
- Step 6: An F'_4 is found from [12a] if $F'_3 > 20^\circ$;
if $F'_3 \leq 20^\circ$, $F'_4 = F'_3$.

Although further iterations could be made, F'_4 and G'_2 are within 1% of the values obtained by a third loop.

Azimuth angle measurement:

During 1968, the anemoclinometers were mounted on masts which were servo-driven with slow motors to maintain orientation into the wind with a dead-band of about 10° . The uv signal from the anemoclinometers was used for sensing direction. The rotation of the masts was measured with a potentiometer. The azimuth angle used in the wind calculations was, G_4 , defined as

$$G_4 = G'_2 + (G_3 - G_{4p}) \quad [16a]$$

where G_3 was the angle of mast rotation measured by the servo potentiometer, G_{4p} was the mean G_4 for the previous

half-hour, and G'_2 is the azimuth angle with respect to the anemoclinometer as found by [15a] in the iteration procedure.

PROGRAM

Program Constants

Thermometers:

B_1 constants for tungsten wire air temperature thermometer
 B_2 and bridge where $T = B_1 + B_2 V_4$, Celsius

B_3 constants for thermistor and the linearized bridge for
 B_4 measuring the surface temperature of the $B_a F_2$ humidity sensor. $T_H = B_3 + B_4 V_6$.

Heat:

$C_T = n c_p = 2.9 \text{ cal cm}^{-3} \text{ K}^{-1}$, heat capacity of air

Vapor pressure:

$C_0 = 6.108 \text{ mb}$ = saturation vapor pressure at zero Celsius

$C_1 = 7.5$
 $C_2 = 237.3 \text{ Celsius}$ constants in Teten's formula for calculating saturation vapor pressure, S, corresponding to a Celsius temperature, T.

S (defined here and on Pl4) $S/C_0 = 10^{[C_1 T / (C_2 + T)]}$
 $= \text{antilog}_{10} [C_1 T / (C_2 + T)]$

C_V = slope of the $B_a F_2$ humidity sensor calibration curve for operating range $[(\Delta \text{relative humidity}) / \Delta \text{volts}]$

$C_P = 4620 \text{ mb cm}^{-3} \text{ K}^{-1} \text{ gm}^{-1}$, the specific gas constant for water vapor.

Wind and stress:

$E_1 = 1.015 = a$ in [6a]

$E_2 = 3.266 \text{ rad}^{-1} = C$ in [8a, 10a]

$E_3 = 1.5 = C_1$ in [12a, 13a]

$E_4 = 0.1745 \text{ rad} = C_2$ in [12a, 13a]

E_5 Potentiometer constants to give (see [16a])

$$E_6 \int G_3 = E_5 V_7 + E_6 \quad [17a]$$

M = range constant of pressure transducer which converts output to pressure

$R = 1.2 \text{ gm cm}^{-3}$ = density of air

Channels

<u>Channel</u>	<u>Signal</u>	<u>Sensor</u>	<u>Variable</u>
1	V_1	Pressure transducer #1	$P_V = (a_0/2) V^2$
2	V_2	" " #2	$P_F = b_0 u w$
3	V_3	" " #3	$P_G = b_0 u v$
4	V_4	Resistance wire thermometer for air temperature	T
5	V_5	Barium fluoride humidity sensor	$H = \text{relative humidity}$
6	V_6	Barium fluoride sensor temperature from a thermometer	T_H
7	V_7	Probe angle from potentiometer (see [16a, 17a])	G_3

Initialization Program

The electronics of the pressure sensors have an electrical zero, V_0 , and a full-scale, V_F , voltage readout for any pressure range. The measured voltages must be normalized to $(V_F - F_0)$. In addition, a ^{wind-}tight chamber is placed over the anemoclinometer sphere to shut out the wind and short all the ports hydraulically; any residual signal, V_S on any pressure range are due to sensor offset and this must be accounted for. Thus we have a normalized voltage from any transducer

$$V_n = (V - V_S) / (V_F - V_O) \quad [183]$$

During the initialization program, the V_O , V_F , V_S are read on each channel for 1 to 3 minutes, averaged, and stored as constants in the machine so that the normalized voltages may be calculated.

Combined Constants Used in Program

$D_1 = M_1 / (V_{F1} - V_{O1})$: M_1 is the range constant of pressure transducer #1 to convert $V_{n1} = (V_1 - V_{S1}) / (V_{F1} - V_{O1})$ to P_V (see [22a])

$D_2 = M_2 / (V_{F2} - V_{O2})$: Similar to D_1 but for P_F

$D_3 = M_3 / (V_{F3} - V_{O3})$: Similar to D_1 but for P_G

$$A_1 = D_2 / D_1 E_2$$

Note that $(D_2 / D_1 E_2) [(V_2 - V_{S2}) / (V_1 - V_{S1})] = (P_F / P_V) / E_2 = F_1$

$A_2 = D_3 / D_1 E_2$ which, analogous to A_1 , is used to find G from $(V_3 - V_{S2}) / (V_1 - V_{S1})$.

$$A_3 = (RE_1 / 2) / D_1$$

Note that $(V_1 - V_{S1}) / A_3 = V^2 = u^2 + v^2 + w^2$

ON-LINE COMPUTATIONS

$$V_1 - V_{S1} = X_1 \quad [1A]$$

If X_1 is negative, set to zero and record the number of times X_1 was negative

$$V_2 - V_{S2} = X_2 \quad [1B]$$

$$V_3 - V_{S3} = X_3 \quad [1C]$$

$$F_1 = A_1 (X_2/X_1) \quad [2] \quad \underline{2/}$$

If $|F_1| > 0.349\text{rad}$ (20°), then

$$|F_2| = E_3 |F_1| - E_4 \quad [3A]$$

If $|F_1| \leq 0.349\text{rad}$ then

$$|F_2| = |F_1| \quad [3B]$$

Sign of F_2 is the same as the sign of F_1

$$G_1 = A_2 (X_3/X_1) \quad [4]$$

If $|G_1| > 0.349\text{rad}$, then

$$|G_2| = E_3 |G_1| - E_4 \quad [5A]$$

If $|G_1| \leq 0.349\text{rad}$, then

$$|G_2| = |G_1| \quad [5B]$$

Sign of G_2 is the same as the sign of G_1 .

If G_2 exceeds 0.69rad (40°) set $G_2 = 0.69\text{rad}$ and record number of times $G_2 > 0.69\text{rad}$.

$$F_3 = A_1 (X_2/X_1) \quad [6]$$

If $|F_3| > 0.349\text{rad}$,

$$|F_4| = E_3 |F_3| - E_4 \quad [7A]$$

2/ Eqs. [2] through [7] are from equations on page P8.

If $|F_3| < 0.349\text{rad}$

$$|F_4| = |F_3| \quad [7B]$$

Sign of F_4 is the same as the sign of F_3 . If F_4 exceeds 0.69rad, set $F_4 = 0.69\text{rad}$ and record number of times $F_4 > 0.69\text{ rad}$.

$$G_3 = E_5 V_7 + E_6 \quad [8A]$$

$$G_4 = G_2 + (G_3 - \bar{G}_{4P}) \quad [8B]$$

where $\bar{G}_{4P} = \bar{G}_2 + \bar{G}_3$ for the previous run ($\bar{G}_2 = \text{mean } G_2$, $\bar{G}_3 = \text{mean } G_3$).

$$X_1^{1/2} \sin F_4 = A_2^{1/2} w \quad [9A] \quad \underline{3/}$$

$$X_1^{1/2} \cos F_4 \cos G_4 = A_3^{1/2} u \quad [9B]$$

$$X_1^{1/2} \sin G_4 = A_3^{1/2} v \quad [9C]$$

$$T_H = B_3 + B_4 V_6 \quad [10]$$

$$S/C_0 = 10^{-C_1 T_H / (T_H + C_2)} \quad [11] \quad \underline{4/}$$

3/ NOTE: In the 1967 program, since the mast was not rotated through G_3 , we used G_2 in place of G_4 in [9A, 9B, 9C].

See page P20 for alternate program equations

4/ NOTE: Teten's equation (continued 4/ page P14)

Accumulate sums and calculate averages of:

	<u>From</u>
$N1 = (1/n) \Sigma w A_3^{\frac{1}{2}}$	[9A]
$N2 = (1/n) \Sigma u A_3^{\frac{1}{2}}$	[9B]
$N3 = (1/n) \Sigma v A_3^{\frac{1}{2}}$	[9C]
$N4 = (1/n) \Sigma (w A_3^{\frac{1}{2}})^2$	[9A]
$N5 = (1/n) \Sigma (u A_3^{\frac{1}{2}})^2$	[9B]
$N6 = (1/n) \Sigma (v A_3^{\frac{1}{2}})^2$	[9C]
$N7 = (1/n) \Sigma (w A_3^{\frac{1}{2}}) (u A_3^{\frac{1}{2}})$	[9A], [9B]
$N8 = (1/n) \Sigma (w A_3^{\frac{1}{2}}) (v A_3^{\frac{1}{2}})$	[9A], [9C]
$N9 = (1/n) \Sigma (u A_3^{\frac{1}{2}}) (v A_3^{\frac{1}{2}})$	[9B], [9C]
$N10 = (1/n) \Sigma [(u A_3^{\frac{1}{2}})^2 + (v A_3^{\frac{1}{2}})^2]^{\frac{1}{2}}$	N5, N6

^{4/} NOTE (Cont.). Tetens's equation is also written

$$S/C_0 = \text{antilog} [C_1 T_H / (T_H + C_2)]$$

S is the saturation vapor pressure corresponding to the BaF₂ humidity sensor Celsius temperature, T_H. C₀ is the saturation vapor pressure at 0C, and C₁ and C₂ are constants, as given on page P9. [Tetens, O. 1930. Ueber einige meteorologische Begriffe. Z. Geophys. 6:297-309.]

$N11 = (1/n) \Sigma (F_4)$	[7A],[7B]
$N12 = (1/n) \Sigma (F_4)^2$	[7A],[7B]
$N13 = (1/n) \Sigma (G_2)$	[5]
$N14 = (1/n) \Sigma (G_2)^2$	[5]
$N15 = (1/n) \Sigma (X_1)$	[1A]
$N16 = (1/n) \Sigma (X_2)$	[1B]
$N17 = (1/n) \Sigma (X_3)$	[1C]
$N20 = (1/n) \Sigma (V_4)$	Channel 4
$N21 = (1/n) \Sigma (V_4)^2$	Channel 4
$N22 = (1/n) \Sigma (V_4) (w A_3^{1/2})$	[9A], Channel 4
$N23 = (1/n) \Sigma (V_4) (u A_3^{1/2})$	[9B], Channel 4
$N24 = (1/n) \Sigma (V_4) (v A_3^{1/2})$	[9C], Channel 4
$N25 = (1/n) \Sigma (S) / (C_0)$	[11]
$N26 = (1/n) \Sigma [(S) / (C_0)]^2$	[11]
$N27 = (1/n) \Sigma (S/C_0) (w A_3^{1/2}) (V_5)$	[11],[9A], Channel 5
$N28 = (1/n) \Sigma (S/C_0) (u A_3^{1/2}) (V_5)$	[11],[9B], Channel 5
$N29 = (1/n) \Sigma (S/C_0) (v A_3^{1/2}) (V_5)$	[11],[9C], Channel 5
$N30 = (1/n) \Sigma (V_6)$	Channel 6
$N31 = (1/n) \Sigma (V_6)^2$	Channel 6
$N32 = (1/n) \Sigma (V_3)$	[3A]

$N33 = (1/n) \Sigma (G_3)^2$	[8A]
$N34 = (1/n) \Sigma (G_4)$	[8B]
$N35 = (1/n) \Sigma (G_4)^2$	[8B]
$N36 = (1/n) \Sigma (X_2) (V_4)$	[1B], Channel 4
$N37 = (1/n) \Sigma (w A_3^{1/2}) (u A_3^{1/2}) (V_4)$	[9A], [9B] Channel 4
$N38 = (1/n) \Sigma (V_5)$	Channel 5
$N39 = (1/n) \Sigma (V_5)^2$	Channel 5
$N40 = (1/n) \Sigma (S/C_0) (V_5)$	[11], Channel 5
$N41 = (1/n) \Sigma [(S/C_0) (V_5)]^2$	[11], Channel 5

Output Calculations (averages and standard deviations):

<u>Para-</u> <u>meter</u>	<u>Avg.</u>	<u>Stand. dev.</u>
$F4 = F_4$	N11	$[(N12) - (N11)^2]^{1/2}$
$G2 = G_2$	N13	$[(N14) - (N13)^2]^{1/2}$
$G3 = G_3$	N32	$[(N33) - (N32)^2]^{1/2}$
$G4 = G_4$	N34	$[(N35) - (N34)^2]^{1/2}$
$U = u$	$(N2) / (A_3^{1/2})$	$\{ (N5) / (A_3) - [(N2) / (A_3^{1/2})]^2 \}^{1/2}$
$V = v$	$(N3) / (A_3^{1/2})$	$\{ (N6) / (A_3) - [(N3) / (A_3^{1/2})]^2 \}^{1/2}$
$W = w$	$(N1) / (A_3^{1/2})$	$\{ (N4) / (A_3) - [(N1) / (A_3^{1/2})]^2 \}^{1/2}$
$TA = T$	$(B_1) + (B_2) (N20)$	$\{ (B_1)^2 + 2(B_1)(B_2)(N20) + (B_2)^2(N21) - [(B_1) + (B_2)(N20)]^2 \}^{1/2}$

$$\begin{aligned}
 S & \quad (N25) (C_0) & \quad \{ (N26) (C_0)^2 - [(N25) (C_0)]^2 \}^{\frac{1}{2}} \\
 T_H = T_H & \quad (B_3) + (B_4) (N30) & \quad \{ (B_3)^2 + 2 (B_3) (B_4) (N30) \\
 & & \quad + (B_4)^2 (N31) \\
 & & \quad - [(B_3) + (B_4) (N30)]^2 \}^{\frac{1}{2}} \\
 V_5 & \quad N38 & \quad [(N39) - (N38)^2]^{\frac{1}{2}} \\
 E = e, mb & \quad [(N40) - & \quad (C_V) [(N41) - (N40)^2]^{\frac{1}{2}} \quad \underline{5/} \\
 & \quad (N25) (N38)] (C_V) (C_0)
 \end{aligned}$$

5/ NOTE: The relative humidity, H, is linear with the logarithm of the resistance. The electronics produces a voltage linear with H.

$$H_1 - H_2 = H' = -k \log P' = C_V V'_5$$

$$V_5 = \bar{V}_5 + V'_5$$

$$S = \bar{S} + S' \quad \text{as found from [11]}$$

$$\bar{S} V_5 = \bar{S} \bar{V}_5 + \bar{S}' V'_5$$

$$\bar{S}' V'_5 = \bar{S} V_5 - \bar{S} \bar{V}_5$$

$$C_V \bar{S}' V'_5 = \bar{S}' H' = C_V (\bar{S} V_5 - \bar{S} \bar{V}_5)$$

Since the vapor pressure $E = SH$

$$\bar{E} = \bar{S} \bar{H} = \bar{S} \bar{H} + \bar{S}' H'$$

$$\bar{E} = \bar{S} \bar{H} + C_0 C_V [(\bar{S}/C_0) \bar{V}_5 - (\bar{S}/C_0) \bar{V}_5]$$

$$\bar{E} = \bar{S} \bar{H} + [C_0 C_V [(N40) - (N25) (N38)]]$$

To find \bar{E} , \bar{S} is found in the above output; \bar{H} is found manually from \bar{V}_5 given in the output, using the calibration curve for the particular sensor; the term in braces is calculated above as an average.

$$(E')^2 = C_V [(N41) - (N40)^2]$$

Output Calculations (averages only):

<u>Par.</u>	<u>Averages</u>
$X_1 = X_1$	N15
$X_2 = X_2$	N16
$X_3 = X_3$	N17
$RW = \overline{ou'w'}$	$[(R)/(A_3)][(N7) - (N2)(N1)]$
$RUV = \overline{ou'v'}$	$[(R)/(A_3)][(N9) - (N2)(N3)]$
$RWV = \overline{ow'v'}$	$[(R)/(A_3)][(N8) - (N1)(N3)]$
$W4 = (u^2 + v^2)^{1/2}$	$(N10)/(A_3^{1/2})$
$HW = \overline{C_T w' T'}$	$[(60.0)(B_2)(C_T)/(A_3^{1/2})][(N22) - (N20)(N1)]$
$HV = \overline{C_T v' T'}$	$[(60.0)(B_2)(C_T)/(A_3^{1/2})][(N24) - (N20)(N3)]$
$HU = \overline{C_T u' T'}$	$[(60.0)(B_2)(C_T)/(A_3^{1/2})][(N23) - (N20)(N2)]$
$EU = \overline{\lambda q' w'}$	$RB1 \left\{ \frac{(60.0)(C_0)[(N28) - (N40)(N2)]}{(C_R)[(B_1) + (B_2)(N20) + 273.2](A_3^{1/2})} \right\} * (\text{times})$ $\{ 597.0 - 0.57 [(B_1) + (B_2)(N20)] \}$
$EV = \overline{\lambda q' v'}$	$RB1 \left\{ \frac{(60.0)(C_0)[(N29) - (N40)(N3)]}{(C_R)[(B_1) + (B_2)(N20) + 273.2](A_3^{1/2})} \right\} * (\text{times})$ $\{ 597.0 - 0.57 [(B_1) + (B_2)(N20)] \}$
$EW = \overline{\lambda q' w'}$	$RB1 \left\{ \frac{(60.0)(C_0)[(N27) - (N40)(N1)]}{(C_R)[(B_1) + (B_2)(N20) + 273.2](A_3^{1/2})} \right\} * (\text{times})$ $\{ 597.0 - 0.57 [(B_1) + (B_2)(N20)] \}$

5/ X_1, X_2, X_3 are used only in monitoring the input.

6/ See page P19.

$$J_1 \quad [(60)(B_2)][(N36) - (N16)(N20)] \quad \text{SEE NOTE 7/}$$

$$J_2 \quad [(60)(B_2)(C_T)/(A_3)][(N37) - (N7)(N20)]$$

6/ NOTE: The composition of the EU, EV, and EW terms are similar. $EW = \lambda q'w'$ is the vertical vapor flux expressed as latent heat, where (60) is included to give $\text{cal cm}^{-2}\text{min}^{-1}$. In this equation

$$\lambda = [597 - 0.57T], \text{ T in Celsius}$$

to give cal/gm (latent heat)

$$q = e/R_v T_K, \text{ where } T_K \text{ is Kelvin}$$

and R_v is the specific gas
constant, so that

$$q = e/[C_K(T + 273.2)], \text{ T in Celsius}$$

7/ NOTE: J_1 and J_2 calculate the heat flux term $(\rho c_p)[\overline{u'w'T'} + \overline{w'u'T'} + \overline{u'w'T'}]$ found by the yaw sphere and thermometer (Chapter 3). J_1 is based on values which are not corrected for pressure decreases with off-axis winds, whereas J_2 is corrected.

COORDINATE SYSTEMS AND ROTATIONS

In flow problems, the components of the flow velocity must be measured relative to some well-defined system of coordinates. In the atmosphere, unlike duct flow where the direction of mean flow is well defined, the coordinate system used can be selected arbitrarily. The wind velocity components are measured with respect to the instrument coordinates.

At the beginning of an experiment, the instrument may be roughly aligned with respect to the direction of mean flow; however, the direction of the mean flow is not known precisely until the end of the experiment. The instrument also can be referenced with respect to gravity and some arbitrary azimuthal direction.

Instrument Coordinate System

Let the x_1, y_1 plane be the plane of the two horizontal ports of the anemoclinometer, (plane Y in Figure P2), the x_1, z_1 plane be the plane of the two vertical ports of the anemoclinometer, (plane Z in Figure P2) and the y_1, z_1 plane be the plane perpendicular to both the x_1, y_1 plane and the x_1, z_1 plane. Since the relative positions of the ports are determined by precision machining, the x_1, y_1 plane is probably perpendicular to the x_1, z_1 plane to within a minute of arc, and we can assume the three planes are orthogonal.

The anemoclinometer is aligned in the field such that the x_1 -axis is approximately the same direction as the mean wind vector, \bar{V} ; the y_1 -axis is approximately normal to gravity (although it could be aligned roughly parallel to a sloping land or canopy surface), the z_1 -axis is perpendicular to both x_1 and y_1 to form the third axis in a right-handed coordinate system. If the anemoclinometer is

moved in the x_1, y_1 plane during the measurement period to keep the angle between \bar{V} and x_1 -axis within the acceptance angle of the anemoclinometer Venturi, we can redefine the reference of the x_1 -axis, for example to be, true south, or we may also use as a reference the azimuth of the \bar{V} as determined during the previous measurement period. We elected the latter in the 1968 measurements.

General Coordinate Transforms

New coordinate systems can be defined by rotations of an angle η about the z_1 -axis, the angle θ about the y_1 -axis, or the angle ϕ about the x_1 -axis. The angle η is positive as the x, y plane is rotated counterclockwise as viewed from the z_1 -axis; the angle θ is positive as the x, z plane is rotated clockwise as viewed from the positive y_1 -axis; and the angle ϕ is positive as the z, y plane is rotated counterclockwise as viewed from the positive x_1 axis.

The coordinate system rotations are orthogonal transformations and can be represented in matrix form (e.g. Albert, A. A. 1949. Solid analytic geometry. Phoenix Books Science Series, University of Chicago Press). For instance, if the x_1, y_1 plane is rotated about the z_1 axis by the angle η to define new axes, x_2, y_2 , and z_2 ,

$$\begin{pmatrix} x_2 \\ y_2 \\ z_2 \end{pmatrix} = (Z_\eta) \begin{pmatrix} x_1 \\ y_1 \\ z_1 \end{pmatrix} \quad [1A]$$

$$\text{where } (Z_\eta) = \begin{pmatrix} \cos\eta & \sin\eta & 0 \\ -\sin\eta & \cos\eta & 0 \\ 0 & 0 & 1 \end{pmatrix} \quad [1B]$$

Similarly, rotations through the angles θ or ϕ can be done with the orthogonal matrices, respectively.

$$(Y_{\theta}) = \begin{pmatrix} \cos\theta & 0 & \sin\theta \\ 0 & 1 & 0 \\ -\sin\theta & 0 & \cos\theta \end{pmatrix} \quad [2]$$

and

$$(X_{\theta}) = \begin{pmatrix} 1 & 0 & 0 \\ 0 & \cos\theta & \sin\theta \\ 0 & -\sin\theta & \cos\theta \end{pmatrix} \quad [3]$$

If more than one rotation is performed, the second rotation angle is defined with respect to the coordinates after the first rotation. A third rotation angle would be defined with respect to the coordinates after the second rotation. Sequential rotations are indicated by placing the matrix of the succeeding transformation to the left of the matrix of the transformation that preceded it.

Natural wind coordinate system:

A natural wind coordinate system may be defined as being a right-handed coordinate system in which the x-axis is parallel to the mean flow with x increasing in the direction of the flow; thus $\bar{w} = \bar{v} = 0$, where \bar{w} and \bar{v} are the mean wind components along the z-axis and the y-axis, respectively. The transformation from the instrument to the natural coordinate system, requires the rotation through angles η and θ . Rotation around the x-axis by an angle θ will be considered later (p.R7), but for the present we shall assume that z-axis is normal to the land surface.

The instantaneous wind components can be separated into mean values and deviations from the means due to turbulence and can be represented in Reynold's notation as

$$u = \bar{u} + u' \quad [4]$$

$$v = \bar{v} + v' \quad [5]$$

$$w = \bar{w} + w' \quad [6]$$

and \bar{w} are time averages
 where \bar{u} , \bar{v} and u' , v' and w' are the deviations along the
 x-, y-, and z-axes, respectively. Since the mean wind
 components \bar{w}_1 and \bar{v}_1 , as measured in the instrument
 coordinates, usually are not zero, we rotate through the
 angle η and then through the angle θ , where

$$\eta = \arctan (\bar{v}_1 / \bar{u}_1) \quad [7]$$

$$\theta = \arctan [\bar{w}_1 / (\bar{u}_1^2 + \bar{v}_1^2)^{1/2}] \quad [8]$$

$$\text{Let } (CE) = \cos \eta = \bar{u}_1 / (\bar{u}_1^2 + \bar{v}_1^2)^{1/2} \quad [9]$$

$$(SE) = \sin \eta = \bar{v}_1 / (\bar{u}_1^2 + \bar{v}_1^2)^{1/2} \quad [10]$$

$$(CT) = \cos \theta = (\bar{u}_1^2 + \bar{v}_1^2)^{1/2} / (\bar{u}_1^2 + \bar{v}_1^2 + \bar{w}_1^2)^{1/2} \quad [11]$$

$$(ST) = \sin \theta = \bar{w}_1 / (\bar{u}_1^2 + \bar{v}_1^2 + \bar{w}_1^2)^{1/2}$$

Then

$$\begin{pmatrix} u \\ v \\ w \end{pmatrix} = (Y_\theta) (Z_\eta) \begin{pmatrix} u_1 \\ v_1 \\ w_1 \end{pmatrix} \quad [13]$$

Therefore,

$$u = u_1 (CT) (CE) + v_1 (CT) (SE) + w_1 (ST) \quad [14]$$

$$v = v_1 (CE) - u_1 (SE) \quad [15]$$

$$w = w_1(CT) - u_1(ST)(CE) - v_1(ST)(SE) \quad [16]$$

Equations [14], [15], and [16] can be written for the time-averaged wind components or for the fluctuating components.

$$\bar{u} = \bar{u}_1(CT)(CE) + \bar{v}_1(CT)(SE) + \bar{w}_1(ST) \quad [17]$$

$$u' = u'_1(CT)(CE) + v'_1(CT)(SE) + w'_1(ST) \quad [18]$$

$$v' = v'_1(CE) - u'_1(SE) \quad [19]$$

$$w' = w'_1(CT) - u'_1(ST)(CE) - v'_1(ST)(SE) \quad [20]$$

By the definition of θ and η , $\bar{v} = \bar{w} = 0$.

By performing the proper multiplications and averaging, [18], [19] and [20] can be manipulated to yield following relationships:

$$\begin{aligned} \overline{(u')^2} &= \overline{(u'_1)^2}(CT)^2(CE)^2 + \overline{(v'_1)^2}(CT)^2(SE)^2 + \overline{(w'_1)^2}(ST)^2 \\ &\quad + 2\overline{u'_1 v'_1}(CT)^2(CE)(SE) + 2\overline{u'_1 w'_1}(CT)(ST)(CE) \\ &\quad + 2\overline{v'_1 w'_1}(CT)(ST)(SE) \end{aligned} \quad [21]$$

$$\overline{(v')^2} = \overline{(v'_1)^2}(CE)^2 + \overline{(u'_1)^2}(SE)^2 - 2\overline{u'_1 v'_1}(CE)(SE) \quad [22]$$

$$\begin{aligned} \overline{(w')^2} &= \overline{(w'_1)^2}(CT)^2 + \overline{(u'_1)^2}(ST)^2(CE)^2 + \overline{(v'_1)^2}(ST)^2(SE)^2 \\ &\quad - 2\overline{u'_1 w'_1}(CT)(ST)(CE) - 2\overline{w'_1 v'_1}(CT)(ST)(SE) \\ &\quad + 2\overline{u'_1 v'_1}(ST)^2(CE)(SE) \end{aligned} \quad [23]$$

$$\begin{aligned}\overline{u'w'} &= \overline{u'_1 w'_1}(\text{CE})[(\text{CT})^2 - (\text{ST})^2] - 2\overline{u'_1 v'_1}(\text{CT})(\text{ST})(\text{CE})(\text{SE}) \\ &\quad + \overline{w'_1 v'_1}(\text{SE})[(\text{CT})^2 - (\text{ST})^2] - \overline{(u'_1)^2}(\text{CT})(\text{ST})(\text{CE})^2 \quad [24] \\ &\quad - \overline{(v'_1)^2}(\text{CT})(\text{ST})(\text{SE})^2 + \overline{(w'_1)^2}(\text{CT})(\text{ST})\end{aligned}$$

$$\begin{aligned}\overline{u'v'} &= \overline{u'_1 v'_1}(\text{CT})[(\text{CE})^2 - (\text{SE})^2] + \overline{w'_1 v'_1}(\text{ST})(\text{CE}) \\ &\quad - \overline{u'_1 w'_1}(\text{ST})(\text{SE}) - \overline{(u'_1)^2}(\text{CT})(\text{CE})(\text{SE}) \quad [25] \\ &\quad + \overline{(v'_1)^2}(\text{CT})(\text{CE})(\text{SE})\end{aligned}$$

$$\begin{aligned}\overline{v'w'} &= \overline{v'_1 w'_1}(\text{CT})(\text{CE}) - \overline{u'_1 w'_1}(\text{CT})(\text{SE}) - \overline{u'_1 v'_1}(\text{ST})[(\text{CE})^2 - (\text{SE})^2] \\ &\quad + \overline{(u'_1)^2}(\text{ST})(\text{CE})(\text{SE}) - \overline{(v'_1)^2}(\text{ST})(\text{CE})(\text{SE}) \quad [26]\end{aligned}$$

Similarly, a scalar such as temperature or water vapor measured near the anemoclinometer can be represented in Reynold's notation as $Q = \bar{Q} + Q'$ and covariances can be corrected by the transform to natural wind coordinates as follows:

$$\overline{Q'u'} = \overline{Q'u'_1}(\text{CT})(\text{CE}) + \overline{Q'v'_1}(\text{CT})(\text{SE}) + \overline{Q'w'_1}(\text{ST}) \quad [27]$$

$$\overline{Q'v'} = \overline{Q'v'_1}(\text{CE}) - \overline{Q'u'_1}(\text{SE}) \quad [28]$$

$$\overline{Q'w'} = \overline{Q'w'_1}(\text{CT}) - \overline{Q'u'_1}(\text{ST})(\text{SE}) - \overline{Q'v'_1}(\text{ST})(\text{SE}) \quad [29]$$

Natural coordinate system with an angular rotation about the x-axis.

At a site with adequate fetch, no divergence, and steady state flow, measurements indicate that in addition to $\bar{v} = \bar{w} = 0$, $(u')^2 > (w')^2$ 1/. Lettau states that $\overline{u'v'} = \overline{w'v'} = 0$ 2/. Although wide variations of $(v')^2$ at different meteorological sites with similar conditions have been reported, our measurements at a one-meter height indicate that $\overline{(u')^2} \geq \overline{(v')^2} > \overline{(w')^2}$.

When $\overline{u'v'} \neq 0$, conditions are not ideal; during the sampling period the horizontal wind velocity tends to increase as it shifts a particular direction 3/. When measurements indicate that $\overline{u'v'}$ is significantly different than zero, local divergence caused by fetch or surface homogeneity may be occurring, since the coordinate transform for forcing $\overline{u'v'}$ to zero results in finite \bar{v} and \bar{w} . A shift in wind direction may be accompanied by a change in velocity due to flow about large-scale surface features; this large scale divergence also may affect $\overline{u'v'}$ significantly over our 30-min sampling period.

Since $\bar{v} = 0$ and there is no reason to expect v' to be correlated with w' 4/, measurements

-
- 1/ Lumley, J. L. and H. A. Panofsky. 1964. The structure of atmospheric turbulence. Interscience Monogr. Vol. 12. John Wiley and Sons, New York, 239 p.
 - 2/ Lettau, H. H., 1968. Three-dimensional turbulence in unidirectional mean flow. p.127-156. In Studies of the effects of boundary modification in problems of small area meteorology. U. S. Army Electronics Command Tech. Rept. ECOM66-624-A, 156p.
 - 3/ Sutton, O. G. 1953. Micrometeorology. McGraw-Hill Book Company, Inc. 333p.
 - 4/ Sutton, O. G. 1948. Atmospheric turbulence. Methuen & Co. Ltd. London. 107 pp.

of finite $\overline{w'v'}$ indicate that the z-axis is orientated such that part of $\overline{u'w'}$ appears in $\overline{w'v'}$. By a proper rotation of the z,y plane through the angle α in the natural wind coordinate system, $\overline{w'v'}$ can be set to zero, with \bar{v} and \bar{w} remaining zero. The result is that the x,y plane is made parallel to the average slope of the terrain somewhere upwind from the sampling point.

Using (X_α) from [3] and letting u_2 , v_2 and w_2 be the wind components after the planar rotation to make $\overline{w'_2v'_2} = 0$,

$$\begin{pmatrix} u_2 \\ v_2 \\ w_2 \end{pmatrix} = (X_\alpha) \begin{pmatrix} u \\ v \\ w \end{pmatrix} \quad [30]$$

Therefore,

$$u_2 = u \quad [31]$$

$$v_2 = v(CB) + w(SB) \quad [32]$$

$$w_2 = w(CB) - v(SB) \quad [33]$$

where

$$CB = \cos\alpha \quad [34]$$

$$SB = \sin\alpha \quad [35]$$

The proper multiplications and averaging of the deviation of the wind components results in

$$\overline{(v'_2)^2} = \overline{(v')^2} (CB)^2 + 2\overline{v'w'} (CB) (SB) + \overline{(w')^2} (SB)^2 \quad [36]$$

$$\overline{(w'_2)^2} = \overline{(w')^2} (CB)^2 - 2\overline{w'v'} (CB) (SB) + \overline{(v')^2} (SB)^2 \quad [37]$$

$$\overline{u'_2 w'_2} = \overline{u'w'} (CB) - \overline{u'v'} (SB) \quad [38]$$

$$\overline{u'_2 v'_2} = \overline{u'v'} (CB) + \overline{u'w'} (SB) \quad [39]$$

$$\begin{aligned} \overline{w'_2 v'_2} = & \overline{v'w'} [(CB)^2 - (SB)^2] + \overline{(w')^2} (CB) (SB) \\ & - \overline{(v')^2} (CB) (SB) \end{aligned} \quad [40]$$

and

$$\overline{(u'_2)^2} = \overline{(u')^2} \quad [41]$$

$$\overline{u_2} = \overline{u} \quad [42]$$

$$\overline{v} = \overline{w} = 0 \quad [43]$$

For a scalar quantity Q ,

$$\overline{Q' u'_2} = \overline{Q' u'} \quad [44]$$

$$\overline{Q' v'_2} = \overline{Q' v'} (CB) + \overline{Q' w'} (SB) \quad [45]$$

$$\overline{Q' w'_2} = \overline{Q' w'} (CB) - \overline{Q' v'} (SB) \quad [46]$$

To make $\overline{w'_2 v'_2} = 0$, we must manipulate [40] to get

$$(SB) = \{- (CB) + [(CB)^2 + 8(K)^2]^{1/2}\} / 4(K) \quad [47]$$

where

$$K = \overline{w'v'} / [\overline{(v')^2} - \overline{(w')^2}] \quad [48]$$

The positive sign must be used in [47] because then $\overline{(w'_2)^2}$ is minimized and $\overline{(v'_2)^2}$ is maximized, as is desirable for $\overline{(v'_2)^2} > \overline{(w'_2)^2}$. Since $\alpha = \arccos (CB)$ is small, (CB) and (SB) can be found in a few iterations by first assuming $CB \approx 1$, then solving [47] for SB, then

$$CB = (K) / (SB) - 2(K) (SB) \quad [49]$$

and repeating until sufficient convergence obtains.

DATA LISTING

	Page
DAVIS, 1967, WITH TWO ROTATIONS TO MAKE $\bar{v} = \bar{w} = 0$	D2
DAVIS, 1967, WITH THREE ROTATIONS TO MAKE $\bar{v} = \bar{w} = \overline{v'w'} = 0$	D22
HANCOCK, 1968, WITH TWO ROTATIONS TO MAKE $\bar{v} = \bar{w} = 0$	D42
HANCOCK, 1968, WITH THREE ROTATIONS TO MAKE $\bar{v} = \bar{w} = \overline{v'w'} = 0$	D58
EXPLANATION OF HEADINGS	D75

TIME SITE	MEAN	USD	VSD	WSD	RUM	PEYHOLDS	RUV	RWV	HORIZ	F	FSD	G	GSD	WIND	WIND	WIND
START	WIND	WIND	ST	DEV	STRESSES	STRESSES	STRESSES	STRESSES	WIND	ELEV	ANGLE	ANGLE	ANGLE	DIR	DIR	SHIFT

42267																
923 1	159.81	66.77	52.67	24.03	-0.375	-0.375	-0.375	-0.375	0.056	206.22	0.000	0.135	-0.255	0.000	0.000	0.000
923 2	200.51	66.20	51.59	23.60	-0.411	-0.411	-0.411	-0.411	-0.098	206.32	0.000	0.135	-0.251	0.000	0.000	0.000
923 3	203.50	64.57	51.24	23.41	-0.369	-0.369	-0.369	-0.369	0.116	207.41	-0.004	0.131	-0.261	0.000	0.000	0.000
953 1	230.16	67.17	65.02	25.95	-0.399	-0.399	-0.399	-0.399	0.067	238.10	0.005	0.121	-0.174	0.000	0.000	0.000
953 2	230.36	66.18	63.75	26.12	-0.532	-0.532	-0.532	-0.532	-0.144	238.14	0.043	0.121	-0.173	0.000	0.000	0.000
953 3	233.85	65.75	63.41	25.94	-0.398	-0.398	-0.398	-0.398	0.169	240.00	-0.002	0.116	-0.181	0.000	0.000	0.000
1100 1	315.74	95.33	69.25	33.56	-1.156	-1.156	-1.156	-1.156	0.069	322.72	0.004	0.118	-0.335	0.000	0.000	0.000
1100 2	324.42	92.90	64.66	32.44	-1.010	-1.010	-1.010	-1.010	-0.083	329.45	0.049	0.107	-0.328	0.000	0.000	0.000
1100 3	328.14	89.09	64.39	32.97	-0.950	-0.950	-0.950	-0.950	0.213	330.27	-0.015	0.109	-0.321	0.000	0.000	0.000
1158 1	343.28	88.82	93.64	37.38	-0.992	-0.992	-0.992	-0.992	0.179	355.46	0.007	0.113	-0.009	0.000	0.000	0.000
1158 2	342.61	89.76	74.16	36.62	-1.143	-1.143	-1.143	-1.143	-0.450	354.85	-0.012	0.118	0.010	0.000	0.000	0.000
1158 3	349.24	89.80	92.89	38.61	-1.134	-1.134	-1.134	-1.134	0.447	359.30	0.021	0.116	0.000	0.000	0.000	0.000
1230 1	365.36	98.33	108.18	39.92	-1.390	-1.390	-1.390	-1.390	0.249	360.47	0.012	0.115	-0.025	0.000	0.000	0.000
1230 2	365.11	94.48	109.42	41.29	-1.254	-1.254	-1.254	-1.254	-0.677	360.53	-0.003	0.117	-0.006	0.000	0.000	0.000
1230 3	373.01	92.47	104.81	41.48	-1.031	-1.031	-1.031	-1.031	0.759	385.04	0.022	0.114	-0.027	0.000	0.000	0.000
1300 1	352.34	97.35	85.48	37.11	-1.135	-1.135	-1.135	-1.135	0.226	362.79	0.005	0.111	-0.102	0.000	0.000	0.000
1300 2	351.49	98.43	86.36	37.16	-1.070	-1.070	-1.070	-1.070	-0.451	362.53	-0.007	0.113	-0.084	0.000	0.000	0.000
1300 3	355.25	98.16	86.03	38.91	-1.236	-1.236	-1.236	-1.236	0.539	363.60	0.016	0.115	-0.093	0.000	0.000	0.000
1411 1	382.45	89.78	84.40	39.01	-1.251	-1.251	-1.251	-1.251	0.408	391.16	0.063	0.103	-0.246	0.000	0.000	0.000
1411 2	379.42	88.74	83.91	40.03	-1.293	-1.293	-1.293	-1.293	-0.332	388.31	0.006	0.110	-0.246	0.000	0.000	0.000
1411 3	384.92	92.41	80.46	39.45	-1.342	-1.342	-1.342	-1.342	0.254	389.39	-0.050	0.110	-0.231	0.000	0.000	0.000
1441 1	350.86	84.51	66.50	36.49	-1.008	-1.008	-1.008	-1.008	0.338	356.52	0.065	0.110	-0.281	0.000	0.000	0.000
1441 2	349.59	82.86	65.35	37.03	-1.052	-1.052	-1.052	-1.052	-0.222	355.16	0.005	0.110	-0.280	0.000	0.000	0.000
1441 3	354.57	82.60	65.23	36.73	-1.039	-1.039	-1.039	-1.039	0.108	355.75	-0.062	0.109	-0.261	0.000	0.000	0.000
1515 1	347.05	79.51	60.44	36.37	-1.047	-1.047	-1.047	-1.047	0.254	351.62	0.067	0.110	-0.248	0.000	0.000	0.000
1515 2	344.56	77.77	60.03	36.48	-0.970	-0.970	-0.970	-0.970	-0.161	349.57	0.005	0.110	-0.252	0.000	0.000	0.000
1515 3	347.03	78.87	58.95	36.60	-1.151	-1.151	-1.151	-1.151	0.157	348.85	0.000	0.000	-0.240	0.000	0.000	0.000
1611 1	326.07	82.82	63.88	34.24	-1.053	-1.053	-1.053	-1.053	0.030	331.49	0.070	0.112	-0.223	0.000	0.000	0.000
1611 2	323.11	79.95	63.47	34.74	-1.032	-1.032	-1.032	-1.032	-0.197	328.97	-0.002	0.113	-0.134	0.000	0.000	0.000
1611 3	325.62	80.40	62.47	34.88	-1.029	-1.029	-1.029	-1.029	0.139	328.93	-0.056	0.113	-0.176	0.000	0.000	0.000
1640 1	373.39	99.70	73.67	37.47	-1.055	-1.055	-1.055	-1.055	-0.116	373.74	-0.037	0.096	-0.544	0.000	0.000	0.000
1640 2	393.35	103.37	73.12	37.55	-1.097	-1.097	-1.097	-1.097	0.100	393.16	0.057	0.086	-0.482	0.000	0.000	0.000
1640 3	393.02	97.24	76.03	34.00	-1.142	-1.142	-1.142	-1.142	0.039	387.02	0.018	0.098	-0.474	0.000	0.000	0.000
1723 1	291.31	79.44	81.39	32.18	-0.791	-0.791	-0.791	-0.791	0.021	300.83	-0.055	0.114	-0.131	0.000	0.000	0.000
1723 2	294.77	78.78	81.78	32.28	-0.770	-0.770	-0.770	-0.770	0.010	304.35	0.058	0.111	-0.133	0.000	0.000	0.000
1723 3	302.09	81.01	80.82	32.61	-1.060	-1.060	-1.060	-1.060	0.728	309.41	0.053	0.109	-0.122	0.000	0.000	0.000
1753 1	204.21	73.11	42.56	23.17	-0.459	-0.459	-0.459	-0.459	-0.029	208.54	-0.055	0.116	-0.272	0.000	0.000	0.000
1753 2	208.62	72.51	42.29	23.35	-0.489	-0.489	-0.489	-0.489	0.073	212.77	0.064	0.112	-0.267	0.000	0.000	0.000
1753 3	216.39	75.14	42.82	23.50	-0.594	-0.594	-0.594	-0.594	0.217	218.81	0.039	0.108	-0.260	0.000	0.000	0.000

[illegible]

TIME SITE	MEAN	USD	WSD	WSD	RUM	RUV	RUV	HORIZ	F	FSJ	G	GSD	WIND	WIND
START	WIND	CM/SEC	ST	DEV	REYNOLDS	STRESSES	CM/SEC	ELEV	ANGLE	ANGLE	ANGLE	ANGLE	DIR	SHIFT
42267														
1830 1	132.68	19.21	28.82	8.33	-0.051	-0.273	0.000	135.46	-0.054	0.059	0.217	0.209	0.000	0.000
1830 2	130.45	24.04	30.12	8.93	-0.020	-0.502	0.000	133.74	0.038	0.065	0.278	0.230	0.000	0.000
1830 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1900 1	164.76	46.74	33.62	15.82	-0.179	-0.323	0.000	167.72	-0.057	0.088	0.097	0.202	0.000	0.000
1900 2	166.58	46.98	33.90	16.07	-0.051	-0.411	0.000	169.72	0.047	0.090	0.143	0.204	0.000	0.000
1900 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1930 1	180.91	42.51	28.22	18.17	-0.224	-0.337	0.000	182.61	-0.059	0.099	0.051	0.150	0.000	0.000
1930 2	193.69	41.84	28.64	19.23	-0.195	-0.375	0.000	185.52	0.055	0.097	0.008	0.149	0.000	0.000
1930 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2000 1	190.10	40.30	34.65	20.78	-0.268	-0.487	0.000	192.75	-0.060	0.109	0.163	0.180	0.000	0.000
2000 2	193.84	41.14	37.26	20.29	-0.238	-0.606	0.000	195.89	0.062	0.104	0.125	0.186	0.000	0.000
2000 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2030 1	183.16	51.64	38.83	20.76	-0.290	-0.517	0.000	197.11	-0.054	0.135	0.247	0.237	0.000	0.000
2030 2	191.61	41.24	40.50	20.77	-0.279	-0.576	0.000	195.76	0.064	0.139	0.215	0.226	0.000	0.000
2030 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
42567														
900 1	254.72	66.00	59.28	28.77	-0.671	-0.358	0.000	261.59	0.003	0.121	0.273	0.235	0.000	0.000
900 2	253.28	63.81	64.68	30.31	-0.712	-0.527	0.000	261.22	0.004	0.125	0.158	0.251	0.000	0.000
900 3	264.59	66.89	59.06	29.84	-0.734	-0.675	0.000	265.51	-0.008	0.119	0.227	0.232	0.000	0.000
945 1	267.36	75.54	76.80	31.08	-0.724	0.000	0.000	277.90	0.003	0.123	0.230	0.282	0.000	0.000
945 2	266.58	72.64	82.60	31.26	-0.728	-0.006	0.000	278.47	-0.001	0.121	0.114	0.298	0.000	0.000
945 3	275.35	74.55	74.27	32.34	-0.814	-0.454	0.000	278.77	0.000	0.126	0.188	0.272	0.000	0.000
1015 1	312.69	92.87	80.84	32.16	-1.126	-2.146	0.000	322.84	0.012	0.112	0.301	0.257	0.000	0.000
1015 2	316.66	87.30	91.19	33.00	-0.764	-2.753	0.000	329.01	0.025	0.109	0.206	0.279	0.000	0.000
1015 3	392.64	66.71	82.51	29.77	-0.564	-1.235	0.000	394.64	-0.010	0.086	0.192	0.225	0.000	0.000
1614 1	451.68	91.73	64.99	40.67	-1.267	-0.351	0.000	456.20	0.018	0.094	0.186	0.142	0.000	0.000
1614 2	450.51	94.19	78.89	41.59	-1.554	-0.455	0.000	456.97	-0.015	0.097	0.229	0.172	0.000	0.000
1614 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1713 1	230.62	43.39	31.24	21.03	-0.274	-0.167	0.000	232.65	0.015	0.092	0.154	0.133	0.000	0.000
1713 2	229.56	43.23	35.89	21.11	-0.280	-0.379	0.000	232.22	-0.015	0.093	0.170	0.155	0.000	0.000
1713 3	237.46	42.17	35.10	20.18	-0.210	-0.321	0.000	237.59	-0.007	0.086	0.166	0.147	0.000	0.000
42667														
1330 1	196.33	116.64	53.23	24.03	-0.621	-1.241	0.000	202.81	0.036	0.215	0.223	0.316	0.000	0.000
1330 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1330 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1400 1	207.68	104.52	79.28	25.11	-0.426	-0.055	0.000	220.59	0.020	0.173	0.063	0.360	0.000	0.000
1400 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1400 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1630 1	399.60	94.12	67.44	39.42	-1.268	-0.504	0.000	404.96	0.003	0.103	0.203	0.162	0.000	0.000
1630 2	521.67	98.11	77.87	47.99	-1.280	-1.789	0.000	524.86	0.097	0.093	0.207	0.145	0.000	0.000
1630 3	425.92	103.47	66.52	43.27	-1.437	-0.372	0.000	422.20	-0.007	0.112	0.275	0.165	0.000	0.000

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
START	RAD	RAD	RAD	SENS:BLE HEAT TRANS ...CAL/(CM2-MIN)....	SENS:BLE HEAT TRANS ...CAL/(CM2-MIN)....	MEAN SI DEV CENTIGRADECAL/(CM2-MIN).....	EU	EV	EW	VSQ F G PARTS PER THOUSAND
42267											
1830 1	-02049	-05580	0.0000	-0234	-0028	-0050	9.	0.0000	0.0000	0.0000	0
1830 2	-02526	-03900	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1830 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1900 1	-00868	-06290	0.0000	-01795	-00356	-00181	9.	0.0000	0.0000	0.0000	0
1900 2	-01308	-04670	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1900 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1930 1	-00595	-06540	0.0000	-01192	-00119	-00141	9.	0.0000	0.0000	0.0000	0
1930 2	-00169	-04510	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1930 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
2000 1	-01743	-06700	0.0000	-01130	-00678	-00164	9.	0.0000	0.0000	0.0000	0
2000 2	-01379	-05840	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
2000 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
2030 1	-02637	-06420	0.0000	-00017	-00253	-00141	10.	0.0000	0.0000	0.0000	0
2030 2	-02260	-05910	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
2030 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
42567											
900 1	-02745	-00590	0.0000	-01606	-00180	-00676	10.	0.0000	0.0000	0.0000	0
900 2	-01608	-00660	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
900 3	-02255	-01180	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
945 1	-02291	-00056	0.0000	-00769	-00805	-01487	11.	0.0000	0.0000	0.0000	0
945 2	-01159	-01115	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
945 3	-01889	-00990	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1015 1	-03156	-00220	0.0000	-05127	-00246	-02212	13.	0.0000	0.0000	0.0000	0
1015 2	-02256	-00021	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1015 3	-01949	-01144	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1614 1	-01283	-01290	0.0000	-02549	-01218	-00766	14.	0.0000	0.0000	0.0000	0
1614 2	-02310	-00230	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1614 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1713 1	-01532	-01110	0.0000	-02458	-00400	-00382	10.	0.0000	0.0000	0.0000	0
1713 2	-01655	-00200	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1713 3	-01604	-01104	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
42667											
1330 1	-02894	-01910	0.0000	-00962	-01261	-01324	15.	0.0000	-00448	-00417	0
1330 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1330 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1400 1	-00027	-00375	0.0000	-00868	-00340	-01300	15.	0.0000	-00415	-00405	0
1400 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1400 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0
1630 1	-02068	-00410	0.0000	-00231	-00313	-00180	13.	0.0000	-00334	-00130	0
1630 2	-02139	-00420	0.0000	-00400	-00013	-00166	13.	0.0000	0.0000	0.0000	0
1630 3	-02726	-00150	0.0000	-00803	-00347	-00251	10.	0.0000	0.0000	0.0000	0

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	EW LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED	
										VSO F	G
42667											
1700 1	-0.1597	-0.0018	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1700 2	-0.1780	0.0831	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1700 3	-0.2345	-0.0144	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1730 1	-0.3536	-0.0105	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1730 2	-0.4059	-0.0383	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1730 3	-0.4059	-0.0383	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1800 1	-0.3704	-0.0073	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1800 2	-0.4262	-0.0077	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1800 3	-0.4262	-0.0077	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1900 1	-0.2797	-0.0335	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1900 2	-0.3162	0.1361	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1900 3	-0.3162	0.1361	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1930 1	-0.2764	-0.0001	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1930 2	-0.3080	0.1359	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1930 3	-0.3080	0.1359	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
2000 1	-0.4174	-0.0094	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
2000 2	-0.4174	-0.0094	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
2000 3	-0.4174	-0.0094	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
42767											
930 1	-0.2132	-0.0104	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
930 2	-0.0632	-0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
930 3	-0.1671	-0.0101	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1000 1	-0.2256	-0.0075	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1000 2	-0.0032	-0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1000 3	-0.0961	-0.0118	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1030 1	-0.1736	-0.0077	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1030 2	-0.0566	0.0361	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1030 3	-0.1965	-0.0078	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1100 1	-0.0400	-0.0060	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1100 2	-0.1073	0.0342	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1100 3	-0.0196	-0.0167	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1130 1	-0.2664	-0.0027	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1130 2	-0.3947	0.0053	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1130 3	-0.2781	-0.0247	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1200 1	-0.3998	0.0035	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1200 2	-0.3597	-0.0246	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1200 3	-0.3597	-0.0246	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1400 1	-0.0145	-0.0042	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1400 2	-0.0414	0.0343	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1400 3	-0.0188	-0.0159	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0

TIME SITE	MEAN	USD	VSD	MSD	RUM	REYNOLDS STRESSES	RUV	RWV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	WIND	ST	DEVDYNES/CM2.....	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
										RAD	RAD	RAD	RAD	RAD	RAD
42767															
1430 1	494.93	118.19	116.21	50.82	-2.322	-1.097	.595	507.95	.003	.107	-.093	.227	.227	0.000	0.000
1430 2	542.40	116.65	113.25	56.89	-2.456	.400	-.961	655.04	-.052	.091	-.048	.202	.202	0.000	0.000
1430 3	548.77	126.81	122.30	55.15	-2.071	-2.071	-.237	455.47	-.011	.104	-.069	.218	.218	0.000	0.000
1500 1	434.31	104.37	110.66	44.45	-1.472	1.750	.467	447.35	.007	.107	.108	.239	.239	0.000	0.000
1500 2	557.22	108.71	113.66	50.36	-2.185	3.969	-1.393	72.67	.035	.094	.160	.232	.232	0.000	0.000
1500 3	480.61	109.90	121.16	46.84	-1.832	2.582	-.307	487.55	-.011	.103	.112	.243	.243	0.000	0.000
1530 1	486.37	115.87	112.23	48.84	-1.947	2.276	.480	499.10	.002	.104	.013	.229	.229	0.000	0.000
1530 2	624.85	124.71	134.38	53.76	-2.326	2.123	-1.095	638.99	.035	.089	.081	.218	.218	0.000	0.000
1530 3	513.45	114.91	115.28	50.26	-1.842	3.256	-.259	520.33	-.014	.102	.044	.227	.227	0.000	0.000
1600 1	494.72	120.76	84.21	50.05	-2.044	.437	.251	501.72	.005	.105	.064	.169	.169	0.000	0.000
1600 2	657.61	120.64	97.55	54.10	-1.991	-1.391	-.544	666.29	.033	.084	.113	.145	.145	0.000	0.000
1600 3	545.42	111.19	99.92	53.58	-1.965	-.066	-.068	549.77	-.013	.102	.073	.181	.181	0.000	0.000
1630 1	524.00	115.97	101.82	52.75	-2.282	.589	.208	533.61	.002	.105	-.051	.191	.191	0.000	0.000
1630 2	694.52	107.58	118.27	57.82	-2.215	-.495	-.880	703.91	.044	.085	.010	.169	.169	0.000	0.000
1630 3	580.22	117.09	112.06	55.64	-2.179	-.381	-.314	485.71	-.011	.100	-.057	.191	.191	0.000	0.000
1700 1	408.37	136.15	106.59	41.93	-1.430	3.343	0.000	420.56	-.001	.100	-.241	.245	.245	0.000	0.000
1700 2	589.37	155.52	145.30	44.83	-1.418	1.304	-.652	605.23	.041	.074	-.211	.232	.232	0.000	0.000
1700 3	452.14	152.28	55.73	44.53	-1.568	-.572	-.315	452.76	0.000	.109	-.232	.227	.227	0.000	0.000
1800 1	327.77	89.74	41.76	30.33	-.820	-.171	.004	430.10	.010	.097	.380	.120	.120	0.000	0.000
1800 2	419.82	84.47	56.76	38.38	-.996	-.484	-.282	423.16	.014	.094	.392	.130	.130	0.000	0.000
1800 3	335.77	115.64	41.93	29.03	-.380	-2.497	-.080	320.41	-.025	.129	.493	.174	.174	0.000	0.000
1900 1	184.89	39.64	29.20	16.26	-.196	.018	.038	187.01	-.006	.096	-.010	.149	.149	0.000	0.000
1900 2	274.11	37.94	33.78	2.92	-.207	-.019	.111	275.96	.036	.069	0.000	.117	.117	0.000	0.000
1900 3	13.47	41.94	31.78	19.28	-.244	-.198	-.002	214.63	-.012	.090	-.042	.144	.144	0.000	0.000
1930 1	291.01	59.40	39.99	29.96	-.626	.049	.054	293.69	-.007	.107	-.221	.138	.138	0.000	0.000
1930 2	397.97	56.50	42.60	30.83	-.625	.310	-.050	399.72	.050	.079	-.198	.106	.106	0.000	0.000
1930 3	316.37	60.81	40.19	30.28	-.709	-.226	-.017	314.76	-.005	.100	-.211	.129	.129	0.000	0.000
2000 1	247.86	60.14	38.52	24.84	-.416	1.000	.007	250.60	-.003	.101	-.135	.149	.149	0.000	0.000
2000 2	357.02	52.97	43.04	25.88	-.451	1.452	-.105	359.28	.037	.073	-.102	.117	.117	0.000	0.000
2000 3	280.52	64.95	40.41	26.81	-.530	.504	-.016	281.34	-.011	.097	-.115	.143	.143	0.000	0.000
2030 1	158.24	92.71	37.01	18.98	-.159	-2.215	.050	162.44	-.006	.116	.173	.260	.260	0.000	0.000
2030 2	226.33	124.34	41.92	23.52	-.296	-3.487	.009	230.61	.038	.120	.160	.246	.246	0.000	0.000
2030 3	0.500	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2300 1	149.65	19.24	22.85	10.60	-.065	.083	.011	151.35	-.005	.069	-.035	.149	.149	0.000	0.000
2300 2	263.80	25.67	33.90	11.54	-.094	.109	-.071	265.77	.041	.043	-.125	.126	.126	0.000	0.000
2300 3	165.15	23.43	23.80	10.98	-.068	-.120	-.071	164.54	-.016	.086	-.208	.143	.143	0.000	0.000
2330 1	143.43	25.86	22.48	12.55	-.109	-.052	.020	145.19	0.000	.087	0.000	.158	.158	0.000	0.000
2330 2	246.05	26.78	.08	14.11	-.049	.016	.159	247.27	.038	.057	.273	.302	.302	0.000	0.000
2330 3	154.89	21.07	21.22	11.41	-.076	-.087	-.011	155.36	-.019	.073	-.095	.136	.136	0.000	0.000

TIME SITE START	ETA RAD	THETA		BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	AIR TEMP ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED		
		VSO	F										
42767													
1430 1	-0.963	-0.034	0.0000	0.0000	-0.5887	0.146	1.544 13.	0.5580	-1.4133	-0.543	0.3692	0	0
1430 2	-0.0478	0.481	0.0000	0.0000	-0.3988	-0.367	1.867 12.	0.4800	0.0000	0.0000	0.0000	0	0
1430 3	-0.0728	-0.188	0.0000	0.0000	-0.5894	-0.016	1.610 14.	0.5130	0.0000	0.0000	0.0000	0	0
1500 1	1.114	0.001	0.0000	0.0000	-0.4478	0.274	1.323 14.	0.5480	-1.0473	0.3661	0.3399	0	0
1500 2	1.1704	0.301	0.0000	0.0000	-0.3917	-0.568	1.350 13.	0.4200	0.0000	0.0000	0.0000	0	0
1500 3	1.1170	-0.199	0.0000	0.0000	-0.5244	-0.163	1.318 14.	0.5150	0.0000	0.0000	0.0000	0	0
1530 1	0.218	-0.051	0.0000	0.0000	-0.4027	-0.001	1.053 14.	0.4810	-1.0723	0.0024	0.2797	0	0
1530 2	0.087	0.313	0.0000	0.0000	-0.4167	-0.052	1.290 13.	0.3750	0.0000	0.0000	0.0000	0	0
1530 3	0.533	-0.020	0.0000	0.0000	-0.4787	-0.157	1.110 14.	0.4910	0.0000	0.0000	0.0000	0	0
1600 1	0.664	-0.027	0.0000	0.0000	-0.1922	-0.141	0.250 13.	0.5680	0.0000	0.0000	0.0000	0	0
1600 2	1.114	0.279	0.0000	0.0000	-0.1275	-0.082	0.399 12.	0.3560	0.0000	0.0000	0.0000	0	0
1600 3	0.0726	-0.020	0.0000	0.0000	-0.0234	-0.1136	0.232 13.	0.4240	0.0000	0.0000	0.0000	0	0
1620 1	-0.0501	-0.054	0.0000	0.0000	-0.0554	0.080	0.038 12.	0.3430	-0.7234	-0.0093	0.1577	0	0
1630 2	-0.114	0.408	0.0000	0.0000	-0.0885	0.250	0.255 12.	0.1710	0.0000	0.0000	0.0000	0	0
1630 3	-0.0567	-0.174	0.0000	0.0000	-0.0779	-0.047	0.049 13.	0.2130	0.0000	0.0000	0.0000	0	0
1700 1	-0.2466	-0.088	0.0000	0.0000	1.1628	0.407	-0.045 11.	0.4690	-1.0444	-0.4505	0.0814	0	0
1700 2	-0.2145	0.409	0.0000	0.0000	0.2591	0.4824	-0.033 11.	0.4340	0.0000	0.0000	0.0000	0	0
1700 3	-0.2368	-0.079	0.0000	0.0000	-0.4969	0.4850	-0.059 12.	0.4440	0.0000	0.0000	0.0000	0	0
1800 1	0.3816	0.037	0.0000	0.0000	0.4592	-0.1143	-0.073 9.	0.5280	-0.0497	-0.0512	-0.0065	0	0
1800 2	0.3927	0.094	0.0000	0.0000	0.2772	-0.1537	-0.068 10.	0.3010	0.0000	0.0000	0.0000	0	0
1800 3	0.4668	-0.026	0.0000	0.0000	-0.1878	-0.3295	-0.041 10.	0.5020	0.0000	0.0000	0.0000	0	0
1900 1	-0.0096	-0.109	0.0000	0.0000	0.2456	0.108	-0.046 6.	0.6160	0.0000	-0.0181	-0.0329	0	0
1900 2	0.0006	0.290	0.0000	0.0000	0.037	0.218	-0.076 9.	0.2430	0.0000	0.0000	0.0000	0	0
1900 3	-0.0456	-0.169	0.0000	0.0000	0.2093	0.115	-0.077 7.	0.5460	0.0000	0.0046	0.0017	0	0
1930 1	-0.2228	-0.134	0.0000	0.0000	0.2704	-0.010	-0.071 6.	0.4080	0.0000	0.0046	-0.0400	0	0
1930 2	-0.1972	0.471	0.0000	0.0000	0.1662	0.419	-0.049 7.	0.2550	0.0000	0.0000	0.0000	0	0
1930 3	-0.2115	-0.120	0.0000	0.0000	0.2909	0.038	-0.080 7.	0.4030	0.0000	0.0000	0.0000	0	0
2000 1	-0.1234	-0.094	0.0000	0.0000	0.1987	-0.146	-0.068 5.	0.4320	0.0000	0.0151	-0.0348	0	0
2000 2	-0.0941	0.350	0.0000	0.0000	0.0087	-0.096	-0.051 6.	0.2590	0.0000	0.0000	0.0000	0	0
2000 3	-0.1100	-0.169	0.0000	0.0000	0.2564	-0.184	-0.065 6.	0.4280	0.0000	0.0000	0.0000	0	0
2030 1	0.0042	-0.092	0.0000	0.0000	0.6790	-0.1247	-0.0367 5.	0.6110	0.0000	-0.0365	-0.0262	0	0
2030 2	0.0829	0.330	0.0000	0.0000	0.5215	-0.1006	-0.019 6.	0.3330	0.0000	0.0000	0.0000	0	0
2030 3	0.0000	0.000	0.0000	0.0000	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0.0000	0	0
2100 1	-0.0320	-0.044	0.0000	0.0000	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0.0000	0	0
2100 2	-0.124	0.408	0.0000	0.0000	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0.0000	0	0
2100 3	-0.102	-0.199	0.0000	0.0000	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0.0000	0	0
2230 1	-0.0029	-0.047	0.0000	0.0000	0.0823	-0.191	-0.279 2.	0.9370	0.0000	-0.0001	-0.0201	0	0
2230 2	-0.5704	0.374	0.0000	0.0000	-0.0001	-0.049	-0.044 2.	1.970	0.0000	-0.0081	0.0000	0	0
2230 3	-0.0981	-0.219	0.0000	0.0000	-0.444	-0.234	-0.176 2.	1.3870	0.0000	0.0000	0.0000	0	0

TIME SITE	MEAN	USD	VSD	MSD	RUM	RUV	RWV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	WIND ST	ST DEV	WSD	REYNOLDS	STRESSES	CM/SEC	WIND	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT

42867														
1	104.27	12.38	18.09	4.18	-0.05	.127	-0.10	105.81	-0.02	.039	-0.75	.171	0.000	0.000
2	160.35	18.66	28.56	8.03	-0.07	-.344	-0.52	182.50	.032	.043	-0.02	.159	0.000	0.000
3	115.67	12.27	22.79	4.83	-0.11	-.027	-0.12	116.90	-0.22	.039	-0.28	.197	0.000	0.000
30	110.08	24.54	31.57	8.28	-0.52	-.101	.014	114.44	-0.02	.081	.026	.279	0.000	0.000
30	200.90	25.94	31.27	10.39	-0.06	-.718	-0.15	207.18	-0.35	.049	-0.46	.251	0.000	0.000
30	118.46	20.87	32.12	6.25	-0.08	-.209	-0.44	120.73	-0.19	.052	-0.60	.268	0.000	0.000
100	135.61	33.07	24.25	12.10	-0.103	-.285	.012	137.96	0.000	.085	-0.236	.196	0.000	0.000
100	228.66	41.33	24.77	14.31	-0.121	-.113	-0.25	229.64	.051	.061	-0.337	.114	0.000	0.000
100	156.94	28.87	21.86	12.33	-0.77	-.225	0.000	154.47	-0.09	.079	-0.319	.156	0.000	0.000
130	102.48	31.51	19.65	8.15	-0.44	-.216	.012	104.17	-0.04	.069	-0.160	.179	0.000	0.000
130	189.93	41.76	26.49	9.88	-0.56	.103	-0.34	191.43	.045	.049	-0.282	.134	0.000	0.000
130	118.73	31.90	20.62	10.13	-0.50	-.171	-0.10	118.36	-0.09	.087	-0.227	.160	0.000	0.000
230	73.78	27.34	19.28	1.63	-0.02	-.160	.006	76.51	-0.09	.036	-0.158	.301	0.000	0.000
230	150.90	29.57	26.06	3.27	-0.16	.080	-0.44	152.94	.037	.020	-0.103	.169	0.000	0.000
230	83.51	31.14	21.35	2.05	-0.18	-.059	-0.15	84.60	-0.03	.072	-0.249	.335	0.000	0.000
400	104.42	41.09	26.28	9.44	-0.52	.501	.007	107.43	.017	.078	-0.001	.240	0.000	0.000
400	167.04	51.24	40.28	16.09	-0.195	.675	-0.10	171.56	.016	.099	.163	.234	0.000	0.000
400	102.98	44.77	25.11	8.52	-0.82	.355	-0.22	104.66	-0.03	.085	-0.030	.273	0.000	0.000
430	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
430	137.42	31.33	26.00	6.56	-0.16	-.074	-0.29	139.63	.046	.057	-0.373	.190	0.000	0.000
430	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
500	93.33	32.06	21.67	8.06	-0.44	.181	.013	95.76	.016	.087	-0.305	.234	0.000	0.000
500	153.75	37.60	31.35	14.20	-0.108	.448	.003	156.86	.040	.089	-0.234	.209	0.000	0.000
500	107.88	25.64	21.12	8.17	-0.35	.225	-0.15	108.32	0.000	.079	-0.221	.226	0.000	0.000
700	112.83	55.57	43.69	15.34	-0.198	.677	.007	119.87	.017	.159	-0.128	.334	0.000	0.000
700	140.27	60.17	53.29	21.25	-0.147	.283	-0.42	148.54	.023	.145	-0.082	.317	0.000	0.000
700	138.30	40.50	56.98	16.35	-0.161	-.190	-0.08	144.47	.003	.137	-0.067	.400	0.000	0.000
50267														
1430	197.06	147.94	88.34	23.31	-0.430	.204	.187	210.44	.010	.144	.018	.346	0.000	0.000
1430	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1430	188.13	141.87	73.29	20.12	-0.231	-2.206	-0.90	200.44	.009	.160	.015	.350	0.000	0.000
1530	267.63	106.13	82.60	29.42	-0.695	2.544	.172	279.52	.011	.128	.042	.319	0.000	0.000
1530	334.80	119.68	98.82	17.77	-0.359	5.731	-0.340	331.87	.009	.060	.048	.323	0.000	0.000
1530	271.62	101.65	79.34	24.52	-0.475	1.324	-0.213	283.21	-0.08	.109	-0.030	.269	0.000	0.000
1600	290.65	82.74	87.67	29.61	-0.674	.992	.166	302.72	.007	.105	.091	.283	0.000	0.000
1600	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1600	308.84	70.71	66.78	26.24	-0.555	-1.190	-0.148	316.79	-0.10	.087	.024	.210	0.000	0.000
1630	394.64	95.60	83.86	39.88	-1.246	-1.401	.197	403.24	.006	.105	.065	.209	0.000	0.000
1630	508.92	118.84	89.59	43.81	-1.317	-2.640	-0.443	518.16	.016	.091	.081	.183	0.000	0.000
1630	410.75	88.27	77.23	35.05	-0.822	-0.698	-0.247	418.63	-0.14	.086	.004	.181	0.000	0.000

DIOA

CORRECTED DATA FOR SITE 3, MAY 2, 1967, Pages D10-D15

TIME START	SITE	MEAN WIND	USD WINDCM/SEC.....	VSD WIND ST DEV	USD	RWU REYNOLDS	RUV STRESSES	RWV	HORIZ WIND CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD
50267													
1430	3	188.53	142.71	86.14	23.70	-.269	-2.912	-.129	200.44	.011	.188	.017	.412
1530	3	271.64	101.64	93.44	28.88	-.564	1.531	-.296	283.21	-.010	.129	-.036	.317
1600	3	308.88	70.74	78.65	30.90	-.461	-.168	-.204	316.79	-.012	.103	.028	.247
1630	3	410.78	88.33	90.96	41.28	-.982	-.818	-.342	418.63	-.017	.102	.005	.213
1705	3	478.04	101.69	73.00	46.59	-1.578	-.407	-.037	481.29	-.007	.101	-.178	.153
1735	3	333.08	75.51	44.78	30.74	-.688	-1.038	-.067	333.11	-.005	.096	-.291	.138
1800	3	273.05	62.06	37.56	26.32	-.450	-.346	.011	274.58	-.008	.097	-.145	.136
1830	3	212.27	45.88	34.88	18.98	-.217	-.394	-.025	213.94	-.023	.088	.188	.163
1900	3	186.54	37.70	20.13	15.04	-.152	-.003	-.011	186.20	-.029	.079	.266	.105
1930	3	201.85	38.69	28.44	18.40	-.210	.064	-.017	203.20	-.019	.091	-.116	.139
2000	3	205.29	37.89	27.96	19.93	-.271	-.089	-.009	206.50	-.016	.098	-.133	.136
2030	3	211.00	40.42	29.71	20.82	-.291	-.163	-.011	212.19	-.013	.100	-.160	.140
2100	3	192.26	38.80	15.94	15.36	-.185	.109	-.017	189.86	-.001	.080	-.440	.083
2136	3	180.94	35.10	22.95	15.90	-.169	.081	-.021	180.27	-.005	.086	-.356	.123
2200	3	198.64	42.91	28.88	17.80	-.185	-.261	-.019	199.35	-.008	.088	-.237	.143
2230	3	183.71	30.43	27.31	16.61	-.175	.019	-.003	185.30	-.012	.091	-.061	.148
2305	3	166.17	33.72	23.28	15.61	-.153	-.284	-.006	167.36	-.010	.093	-.090	.142
2330	3	160.92	48.60	24.48	14.63	-.119	-.528	0.000	161.93	-.029	.082	.172	.144

TIME START	SITE	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLECAL/(CM2-MIN)....	HV HEAT TRANS	HW MEAN ST DEV CENTIGRADE	AIR TEMP MEAN ST DEV CENTIGRADE	EU LATENTCAL/(CM2-MIN)....	Z HEAT TRANS	EW
50267											
1430	3	-.1226	-.0119	0.0000	.5517	-.3752	.0267	20.	.5150	0.0000	0.0000
1530	3	-.0100	-.0204	0.0000	-.0175	-.2040	.0485	20.	.3820	0.0000	0.0000
1600	3	.0258	-.0199	0.0000	-.0737	-.0134	.0174	20.	.1670	0.0000	0.0000
1630	3	.0007	-.0291	0.0000	-.0824	.0239	-.0144	19.	.2480	0.0000	0.0000
1705	3	-.1802	-.0140	0.0000	.1850	.0071	-.0445	18.	.1560	0.0000	0.0000
1735	3	-.2987	-.0110	0.0000	.4301	-.1190	-.0532	18.	.4750	0.0000	0.0000
1800	3	-.1500	-.0142	0.0000	.5410	-.0664	-.0570	16.	.6640	0.0000	0.0000
1830	3	.1810	-.0272	0.0000	.4629	-.1494	-.0337	13.	.9840	0.0000	0.0000
1900	3	.2662	-.0320	0.0000	.0244	-.0036	-.0228	11.	.5290	0.0000	0.0000
1930	3	-.1146	-.0239	0.0000	.1257	-.0002	-.0330	9.	.4090	0.0000	0.0000
2000	3	-.1347	-.0219	0.0000	.1341	.0110	-.0345	9.	.3650	0.0000	0.0000
2030	3	-.1636	-.0196	0.0000	.1919	-.0254	-.0356	8.	.3590	0.0000	0.0000
2100	3	-.4340	-.0069	0.0000	.1668	.0046	-.0232	8.	.3200	0.0000	0.0000
2136	3	-.3518	-.0099	0.0000	.1183	-.0280	-.0219	8.	.3000	0.0000	0.0000
2200	3	-.2431	-.0124	0.0000	.1800	-.0070	-.0234	7.	.3280	0.0000	0.0000
2230	3	-.0612	-.0174	0.0000	.3869	-.0318	-.0231	7.	.3010	0.0000	0.0000
2305	3	-.1003	-.0151	0.0000	.1138	-.0241	-.0220	7.	.2970	0.0000	0.0000
2330	3	.1557	-.0329	0.0000	.2535	-.0627	-.0159	6.	.3770	0.0000	0.0000

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
START	RAD	RAD	RAD	SENSIBLE HEAT TRANSCAL/(CM2-MIN)....	HEAT TRANS	MEAN ST DEV CENTIGRADE		LATENT HEAT TRANSCAL/(CM2-MIN)....		VSO F	G
42867											
1	0.048	-0.031	0.0000	0.596	0.0876	0.0000	2.5140	0.349	0.338	-0.010	0
2	-0.014	0.320	0.0000	0.040	0.0278	-0.0049	2.2980	0.0000	0.0000	0.0000	0
3	-0.0300	-0.0234	0.0000	0.348	0.268	-0.0045	2.3610	0.0000	0.0000	0.0000	0
30	1	0.250	-0.044	0.0000	0.860	-0.0692	1.3810	0.0000	0.0000	0.0000	0
30	2	-0.0378	0.361	0.0000	0.505	-0.0409	2.1760	0.0000	0.0000	0.0000	0
30	3	-0.0696	-0.020	0.0000	0.722	-0.1035	1.4200	0.0000	0.0000	0.0000	0
100	1	-0.2507	-0.044	0.0000	1.135	-0.0335	1.3120	0.0000	0.0000	0.0000	0
100	2	-0.3412	0.504	0.0000	1.142	0.058	2.2070	0.0000	0.0000	0.0000	0
100	3	-0.3216	-0.012	0.0000	1.085	-0.0472	2.3500	0.0000	0.0000	0.0000	0
130	1	-0.1730	-0.060	0.0000	0.591	-0.0203	1.2400	0.0000	0.0000	0.0000	0
130	2	-0.2777	0.444	0.0000	0.520	-0.0031	2.1390	0.0000	0.0000	0.0000	0
130	3	-0.2335	-0.017	0.0000	0.634	-0.0505	1.3370	0.0000	0.0000	0.0000	0
230	1	-0.1647	-0.084	0.0000	0.671	-0.0739	1.3390	0.0000	0.0000	0.0000	0
230	2	-0.0975	0.360	0.0000	0.399	-0.0042	2.5550	0.0000	0.0000	0.0000	0
230	3	-0.2040	-0.016	0.0000	1.035	-0.0083	1.2630	0.0000	0.0000	0.0000	0
400	1	0.429	0.140	0.0000	-0.499	-0.0084	0.3710	0.0000	0.0000	0.0000	0
400	2	0.1865	0.114	0.0000	0.328	-0.0899	0.2700	0.0000	0.0000	0.0000	0
400	3	0.314	-0.014	0.0000	-0.301	0.0353	0.3600	0.0000	0.0000	0.0000	0
430	1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0
430	2	-0.3717	0.467	0.0000	0.203	-0.0147	0.2500	0.0000	0.0000	0.0000	0
430	3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0
500	1	-0.2752	0.125	0.0000	0.158	-0.0385	0.4100	0.0000	0.0000	0.0000	0
500	2	-0.2152	0.387	0.0000	0.306	-0.0090	0.2260	0.0000	0.0000	0.0000	0
500	3	-0.1927	-0.042	0.0000	-0.021	-0.0687	0.4410	0.0000	0.0000	0.0000	0
700	1	-0.0960	0.029	0.0000	-0.4100	-0.0007	0.379	5.6260	-0.0687	0.596	0
700	2	0.045	0.020	0.0000	0.779	-0.1765	4.3790	0.0000	0.0000	0.0000	0
700	3	-0.0706	-0.062	0.0000	-0.0353	-0.1330	5.6000	0.0000	0.0000	0.0000	0
50267											
1430	1	-0.043	0.023	0.0000	-0.3438	-0.6081	0.5320	3.2180	-0.5181	1.888	0
1430	2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0
1430	3	-0.1042	-0.009	0.0000	0.5378	-0.3193	0.5150	0.0000	0.0000	0.0000	0
1530	1	0.079	0.022	0.0000	-0.4249	-0.0266	0.396	20.2540	0.3970	0.3265	0
1530	2	0.1132	0.064	0.0000	-0.2885	-0.0634	0.314	20.2390	0.0000	0.0000	0
1530	3	-0.0084	-0.017	0.0000	-0.0178	-0.1732	0.412	20.3820	0.0000	0.0000	0
1600	1	0.0962	0.003	0.0000	-0.1339	0.0420	0.172	20.2940	0.1857	0.2336	0
1600	2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0
1600	3	0.0219	-0.016	0.0000	-0.0735	-0.0114	0.1670	0.0000	0.0000	0.0000	0
1630	1	0.0582	-0.002	0.0000	-0.0884	0.0816	-0.0165	19.3130	-0.5724	0.277	0
1630	2	0.0741	0.114	0.0000	-0.1707	-0.0038	19.1660	0.0000	0.0000	0.0000	0
1630	3	0.0006	-0.019	0.0000	-0.0825	-0.0203	-0.0122	19.2480	0.0000	0.0000	0

TIME SITE START	MEAN WIND	USD	VSD	WSD	RUM REYNOLDS/CN2	RUV DYNES/CN2	RWV	HORIZ WIND CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD	WIND DIR	WIND RAD	WIND SHIFT RAD
50267															
1705 1	451.49	106.91	83.19	43.10	-1.480	1.864	-0.25	458.68	0.000	100	-129	177	0.000	0.000	0.000
1705 2	605.23	101.76	96.95	49.72	-2.040	1.217	-0.38	614.26	-0.26	084	-127	157	0.000	0.000	0.000
1705 3	475.88	101.07	62.25	39.55	-1.327	1.067	-0.24	481.29	-0.06	086	-151	130	0.000	0.000	0.000
1715 1	329.45	73.92	46.26	30.97	-0.701	-0.724	-0.39	332.54	-0.02	097	-248	142	0.000	0.000	0.000
1715 2	419.78	67.77	58.71	34.90	-0.883	-0.934	-1.32	425.56	0.36	084	-236	137	0.000	0.000	0.000
1715 3	329.02	73.76	38.49	26.10	-0.580	-0.711	-0.87	333.11	-0.04	082	-247	117	0.000	0.000	0.000
1800 1	250.96	62.11	40.93	25.74	-0.435	-0.169	-0.39	254.18	0.04	103	-090	163	0.000	0.000	0.000
1800 2	351.63	57.78	43.08	25.69	-0.414	-0.410	-0.22	354.84	0.25	072	-088	121	0.000	0.000	0.000
1800 3	272.19	61.68	31.99	22.34	-0.378	-0.232	-0.09	274.58	-0.07	082	-123	116	0.000	0.000	0.000
1830 1	206.65	52.31	35.05	20.59	-0.281	-0.493	-0.17	209.33	0.09	098	256	161	0.000	0.000	0.000
1830 2	292.00	51.22	44.72	22.06	-0.255	-0.983	-0.66	296.97	0.08	073	267	150	0.000	0.000	0.000
1830 3	211.28	46.01	29.75	16.12	-0.179	-0.398	-0.09	213.94	-0.19	075	159	138	0.000	0.000	0.000
1900 1	180.07	37.86	20.36	16.15	-0.151	0.004	-0.16	181.07	0.10	089	331	110	0.000	0.000	0.000
1900 2	268.23	31.81	23.36	17.47	-0.141	0.058	-0.03	271.14	0.02	063	329	083	0.000	0.000	0.000
1900 3	184.71	37.53	17.25	12.77	-0.125	-0.034	-0.09	186.20	-0.25	087	226	089	0.000	0.000	0.000
1930 1	192.72	40.41	28.26	19.02	-0.239	0.046	-0.38	194.74	0.04	039	-142	146	0.000	0.000	0.000
1930 2	280.76	37.75	31.65	21.31	-0.239	0.046	-0.33	282.88	0.21	075	-096	112	0.000	0.000	0.000
1930 3	201.47	38.58	24.19	15.62	-0.176	0.081	-0.12	203.20	-0.16	077	-098	118	0.000	0.000	0.000
2000 1	201.11	41.44	30.22	20.98	-0.303	-0.091	0.34	203.32	0.05	107	-157	151	0.000	0.000	0.000
2000 2	286.22	40.04	31.48	23.06	-0.276	-0.130	0.00	288.28	0.26	080	-106	109	0.000	0.000	0.000
2000 3	204.76	37.70	23.80	16.92	-0.227	-0.045	-0.06	206.50	-0.13	083	-113	116	0.000	0.000	0.000
2030 1	194.38	42.08	29.20	19.80	-0.260	-0.086	0.26	196.47	0.04	105	-174	149	0.000	0.000	0.000
2030 2	285.68	41.11	31.47	23.05	-0.255	-0.244	0.35	287.89	0.29	080	-144	109	0.000	0.000	0.000
2030 3	210.20	40.11	25.32	17.68	-0.244	-0.096	-0.07	212.19	-0.11	085	-136	118	0.000	0.000	0.000
2100 1	165.32	42.84	17.73	15.78	-0.189	0.441	-0.20	166.11	-0.01	101	-445	108	0.000	0.000	0.000
2100 2	258.21	33.00	19.01	16.97	-0.148	0.033	-0.20	261.52	0.41	063	-421	070	0.000	0.000	0.000
2100 3	187.45	38.17	13.88	13.04	-0.154	0.122	-0.12	189.66	-0.01	068	-373	070	0.000	0.000	0.000
2136 1	135.69	38.76	19.63	15.00	-0.163	0.314	-0.10	136.79	0.05	100	-375	126	0.000	0.000	0.000
2136 2	255.12	32.81	32.04	17.83	-0.182	-0.092	-0.61	256.48	0.38	087	-285	123	0.000	0.000	0.000
2136 3	171.91	34.73	19.82	13.50	-0.142	0.120	-0.15	180.27	-0.04	073	-302	105	0.000	0.000	0.000
2200 1	185.77	45.00	34.49	18.84	-0.272	0.069	0.05	188.91	0.05	104	-126	186	0.000	0.000	0.000
2200 2	276.39	45.26	40.54	20.44	-0.243	-0.266	-0.61	279.70	0.25	073	011	148	0.000	0.000	0.000
2200 3	197.03	42.27	24.72	15.11	-0.156	-0.163	-0.13	199.35	-0.07	074	-201	122	0.000	0.000	0.000
2230 1	167.54	31.20	25.21	16.66	-0.200	0.031	0.09	169.43	0.04	102	-122	153	0.000	0.000	0.000
2230 2	258.87	30.10	28.84	17.72	-0.180	0.079	-0.24	260.62	0.20	068	013	110	0.000	0.000	0.000
2230 3	183.61	30.41	23.20	14.10	-0.145	0.030	-0.02	185.30	-0.10	077	-052	126	0.000	0.000	0.000
2305 1	134.98	46.27	24.45	14.13	-0.167	-0.629	0.22	137.26	0.08	103	-048	197	0.000	0.000	0.000
2305 2	228.17	43.37	25.46	16.52	-0.145	-0.526	-0.12	229.79	0.24	073	024	118	0.000	0.000	0.000
2305 3	165.93	33.87	19.79	13.25	-0.128	-0.225	-0.04	167.36	-0.08	079	-077	121	0.000	0.000	0.000

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
START	RAD	RAD	RAD	SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HEAT TRANS ...CAL/(CM2-MIN)...	MEAN ST DEV CENTIGRADE		LATENT HEAT TRANS ...CAL/(CM2-MIN)...	HEAT TRANS ...CAL/(CM2-MIN)...	PARTS PER THOUSAND	
50267											
1705 1	-1218	-0075	0.0000	.2710	.0821	-.0496 18.	.3050	-.4030	-.0531	.0579	0 0 0
1705 2	-1253	-0222	0.0000	.1475	.0454	-.0467 18.	.1890	0.0000	0.0000	0.0000	0 0 0
1705 3	-1334	-0119	0.0000	.1843	.0061	-.0378 18.	.1560	0.0000	0.0000	0.0000	0 0 0
1735 1	-2550	-0079	0.0000	.4034	-.1111	-.0682 17.	.4870	-.2328	.0112	.0212	0 0 0
1735 2	-2426	-0324	0.0000	.2270	-.1429	-.0564 18.	.2990	0.0000	0.0000	0.0000	0 0 0
1735 3	-2457	-0094	0.0000	.4152	-.1023	-.0452 18.	.4750	0.0000	0.0000	0.0000	0 0 0
1800 1	-0941	-0018	0.0000	.5651	-.0478	-.0596 16.	.7120	-.0919	.0452	-.0399	0 0 0
1800 2	-0919	-0224	0.0000	.3212	-.0496	-.0462 17.	.4410	0.0000	0.0000	0.0000	0 0 0
1800 3	-1276	-0121	0.0000	.5363	-.0565	-.0484 16.	.6640	0.0000	0.0000	0.0000	0 0 0
1830 1	-2496	-0037	0.0000	.5017	-.1373	-.0388 13.	.8570	.2014	-.0225	-.0374	0 0 0
1830 2	-2611	-0063	0.0000	.3283	-.1441	-0.0201 15.	.7170	0.0000	0.0000	0.0000	0 0 0
1830 3	-1541	-0233	0.0000	.4680	-.1274	-.0285 13.	.9840	0.0000	0.0000	0.0000	0 0 0
1900 1	-3340	-0064	0.0000	.0327	.0001	-.0409 11.	.5780	0.0000	0.0000	0.0000	0 0 0
1900 2	-3332	-0013	0.0000	-.1091	-.0427	-0.0227 13.	.5790	0.0000	0.0000	0.0000	0 0 0
1900 3	-2275	-0287	0.0000	.0243	-.0031	-0.0134 11.	.5290	0.0000	0.0000	0.0000	0 0 0
1930 1	-1425	-0004	0.0000	.1526	-.0203	-.0406 9.	.4670	0.0000	0.0000	0.0000	0 0 0
1930 2	-0962	-0192	0.0000	.0489	-.0133	-0.0303 11.	.3620	0.0000	0.0000	0.0000	0 0 0
1930 3	-0974	-0203	0.0000	.1253	-.0002	-0.0280 9.	.4090	0.0000	0.0000	0.0000	0 0 0
2000 1	-1632	-0015	0.0000	.1477	.0103	-.0384 9.	.3580	0.0000	0.0000	0.0000	0 0 0
2000 2	-1088	-0239	0.0000	.0716	.0138	-.0316 10.	.2680	0.0000	0.0000	0.0000	0 0 0
2000 3	-1145	-0184	0.0000	.1339	.0094	-0.0292 9.	.3650	0.0000	0.0000	0.0000	0 0 0
2030 1	-1768	-0014	0.0000	.1934	-.0122	-0.0365 9.	.4010	0.0000	0.0000	0.0000	0 0 0
2030 2	-1483	-0267	0.0000	.1363	-.0247	-0.0279 10.	.3130	0.0000	0.0000	0.0000	0 0 0
2030 3	-1393	-0167	0.0000	.1898	-.0216	-0.0303 8.	.3590	0.0000	0.0000	0.0000	0 0 0
2100 1	-4332	-0081	0.0000	.2255	.0357	-0.0279 9.	.4470	0.0000	0.0000	0.0000	0 0 0
2100 2	-4261	-0404	0.0000	.0666	-.0051	-0.0201 10.	.2690	0.0000	0.0000	0.0000	0 0 0
2100 3	-3748	-0054	0.0000	.1631	.0040	-0.0214 8.	.3200	0.0000	0.0000	0.0000	0 0 0
2136 1	-3650	-0002	0.0000	.1811	.0201	-0.0235 7.	.3960	.1349	.0103	-.0263	0 0 0
2136 2	-2886	-0369	0.0000	.0226	-.0433	-0.0163 9.	.2750	0.0000	0.0000	0.0000	0 0 0
2136 3	-3321	-0090	0.0000	.1137	-.0242	-0.0186 8.	.3000	0.0000	0.0000	0.0000	0 0 0
2200 1	-1252	-0008	0.0000	.1898	.0446	-0.0316 7.	.4020	.1629	.0327	-.0334	0 0 0
2200 2	-0075	-0230	0.0000	.1086	.0628	-0.0277 9.	.3090	0.0000	0.0000	0.0000	0 0 0
2200 3	-2075	-0109	0.0000	.1780	-.0060	-0.0199 7.	.3280	0.0000	0.0000	0.0000	0 0 0
2230 1	-1214	-0018	0.0000	.0923	-.0078	-0.0287 7.	.2930	.0997	-.0039	-.0303	0 0 0
2230 2	-0144	-0187	0.0000	.0529	-.0004	-0.0175 8.	.2080	0.0000	0.0000	0.0000	0 0 0
2230 3	-0520	-0147	0.0000	.0862	-.0270	-0.0196 7.	.3010	0.0000	0.0000	0.0000	0 0 0
2305 1	-0831	-0007	0.0000	.2318	-.0636	-0.0253 6.	.3860	.1768	-.0426	-.0254	0 0 0
2305 2	-0145	-0223	0.0000	.1102	-.0268	-0.0171 8.	.2730	0.0000	0.0000	0.0000	0 0 0
2305 3	-0832	-0129	0.0000	.1129	-.0205	-0.0187 7.	.2970	0.0000	0.0000	0.0000	0 0 0

TIME SITE START	MEAN WIND	USD WIND	VSD ST DEV	MSD WIND	RUM REYNOLDS STRESSES DYNES/CM2	RUV STRESSES DYNES/CM2	RWV STRESSES DYNES/CM2	HORIZ WIND CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD	WIND DIR RAD	WIND SHIFT RAD
50267														
2330 1	171.43	42.74	30.94	17.83	-208	-359	-0.43	174.06	-0.12	-102	-123	-174	0.360	0.000
2330 2	254.72	44.21	32.41	18.69	-173	-548	-0.24	257.88	-0.11	-070	-244	-124	0.060	0.000
2330 3	160.35	48.78	20.85	12.42	-098	-475	0.000	161.93	-0.24	-069	-146	-122	0.000	0.000
50367														
1	201.89	39.19	3.61	21.27	-304	-054	-0.22	205.15	-0.09	-108	-089	-181	0.000	0.000
2	292.61	38.20	39.01	22.48	-273	-164	-0.42	296.41	-0.13	-077	-216	-134	0.000	0.000
3	189.34	37.78	13.93	18.62	-233	-240	-0.46	191.68	-0.17	-098	-102	-185	0.000	0.000
1130 1	106.66	68.74	44.44	19.46	-146	-299	-0.81	113.35	-0.01	-231	-160	-379	0.000	0.000
1130 2	134.55	91.87	54.31	26.64	-191	-208	-1.62	145.70	-0.02	-230	-111	-389	0.000	0.000
1130 3	110.33	49.59	42.36	19.31	-122	-921	-1.50	115.28	-0.15	-209	-174	-374	0.000	0.000
1230 1	210.72	122.14	68.31	23.70	-347	1.680	-1.99	219.82	-0.08	-144	-173	-312	0.000	0.000
1230 2	249.29	127.89	85.31	34.21	-619	2.107	-4.83	263.86	-0.07	-168	-213	-315	0.000	0.000
1230 3	220.58	106.64	69.93	27.75	-633	.617	-2.50	226.94	-0.13	-159	-274	-296	0.000	0.000
1306 1	273.55	105.74	43.23	25.26	-522	-664	-0.06	276.14	-0.13	-098	-354	-157	0.000	0.000
1306 2	329.60	104.24	59.66	36.68	-677	-2.287	-0.34	337.81	-0.07	-125	-395	-166	0.000	0.000
1306 3	272.74	98.84	49.49	28.30	-654	-1.320	-0.59	273.36	-0.15	-128	-370	-186	0.000	0.000
1330 1	224.96	102.04	70.95	25.11	-171	2.563	-1.84	235.52	-0.02	-137	-089	-331	0.000	0.000
1330 2	270.57	118.17	84.32	33.96	-276	3.350	-3.97	284.72	0.000	-163	-102	-312	0.000	0.000
1330 3	238.23	106.37	75.61	26.45	-682	3.307	-2.54	247.39	-0.08	-154	-082	-343	0.000	0.000
1400 1	197.21	81.11	62.66	19.40	-238	1.460	-0.99	196.27	-0.05	-127	-070	-314	0.000	0.000
1400 2	219.94	86.24	80.34	27.80	-338	.305	-5.49	235.16	-0.08	-145	-119	-344	0.000	0.000
1400 3	185.98	88.14	65.57	20.87	-378	-0.01	-1.01	194.40	-0.02	-145	-115	-345	0.000	0.000
1430 1	201.83	84.40	43.32	22.34	-194	.200	-0.20	206.01	-0.06	-142	-298	-218	0.000	0.000
1430 2	225.35	98.70	53.94	32.61	-355	-569	-1.24	233.27	-0.05	-186	-328	-231	0.000	0.000
1430 3	180.83	100.04	52.49	23.88	-540	.059	-0.51	185.24	-0.01	-166	-263	-295	0.000	0.000
1600 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1600 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1600 3	164.33	85.65	39.55	16.99	-445	.111	-0.53	158.48	-0.32	-193	.284	.244	0.000	0.000
1630 1	281.82	67.44	71.95	28.72	-474	1.109	-1.34	290.85	-0.04	-105	-145	-257	0.000	0.000
1630 2	351.02	75.14	84.90	33.07	-750	.954	-2.95	363.24	-0.15	-097	-149	-246	0.000	0.000
1630 3	284.20	69.80	70.00	29.16	-640	.901	-1.85	290.77	-0.15	-106	-134	-251	0.000	0.000
1700 1	293.50	71.57	56.67	29.71	-741	.266	-0.29	298.79	-0.05	-106	-030	-191	0.000	0.000
1700 2	381.97	62.31	65.64	33.97	-662	.268	-1.92	388.32	-0.14	-090	-027	-171	0.000	0.000
1700 3	294.28	63.62	56.44	29.84	-662	-322	-0.60	298.59	-0.14	-105	0.000	-189	0.000	0.000
1730 1	255.60	60.36	44.67	26.41	-523	-280	-0.44	259.27	-0.08	-106	-060	-168	0.000	0.000
1730 2	353.93	66.94	46.80	30.30	-571	-406	-0.82	357.35	-0.23	-086	-062	-129	0.000	0.000
1730 3	275.93	68.53	42.98	27.98	-584	.043	-0.07	278.40	-0.13	-103	-065	-151	0.000	0.000
1800 1	227.09	61.31	33.95	23.20	-396	.134	-0.13	229.47	-0.06	-103	-043	-145	0.000	0.000
1800 2	318.68	57.89	37.36	26.36	-391	.064	-0.68	321.00	-0.23	-080	-059	-110	0.000	0.000
1800 3	244.21	58.77	33.00	23.75	-420	-0.99	-0.13	245.80	-0.14	-098	-068	-130	0.000	0.000

DI4

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HV LATENT HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CENTIGRADE	AIR TEMP	EU LATENT HEAT TRANS ...CAL/(CM2-MIN)...	EV LATENT HEAT TRANS ...CAL/(CM2-MIN)...	EW LATENT HEAT TRANS ...CAL/(CM2-MIN)...	LIMITS EXCEEDED VSQ F G PARTS PER THOUSAND
50267											
2330 1	.1139	.0067	0.0000	.1472	-.0374	-.0297	6.	.3200	.1482	-.0380	0 0 0
2330 2	.2390	.0094	0.0000	.0239	.0068	-.0204	7.	.2400	0.0000	0.0000	0 0 0
2330 3	.1325	-.0280	0.0000	.2551	-.0534	-.0134	6.	.3770	0.0000	0.0000	0 0 0
50367											
1130 1	.0893	.0026	0.0000	.0921	-.0140	-.0308	6.	.2920	-.0940	-.0159	0 0 0
1130 2	.2164	.0104	0.0000	.0462	-.0237	-.0262	7.	.2520	0.0000	0.0000	0 0 0
1130 3	.1088	-.0234	0.0000	.0607	.0095	-.0248	6.	.2630	0.0000	0.0000	0 0 0
1230 1	-.2460	-.0122	0.0000	-.0552	-.2680	.0490	17.	.8980	0.0000	0.0000	0 0 0
1230 2	-.2241	.0178	0.0000	-.0854	-.0508	.1557	17.	.5960	0.0000	0.0000	0 0 0
1230 3	-.2852	-.0004	0.0000	.5758	-.0973	.1759	10.	.9120	0.0000	0.0000	0 0 0
1230 1	.2231	-.0012	0.0000	-.9307	-.1370	.1442	19.	.7440	.4387	.2905	0 0 0
1230 2	.2500	-.0014	0.0000	-.0274	-.0804	.1194	19.	.4090	0.0000	0.0000	0 0 0
1230 3	.2664	-.0280	0.0000	.1150	-.0066	.1323	20.	.6930	0.0000	0.0000	0 0 0
1330 1	.3674	.0065	0.0000	-.1308	-.0798	.1351	20.	.7560	-.5082	-.1683	0 0 0
1330 2	.3906	.0014	0.0000	-.3267	-.0854	.1641	19.	.5680	0.0000	0.0000	0 0 0
1330 3	.3567	-.0234	0.0000	-.1526	.0310	.1287	20.	.6670	0.0000	0.0000	0 0 0
1330 1	.1464	-.0009	0.0000	-.0764	.1005	.1194	20.	.6860	.3999	.6748	0 0 0
1330 2	.1562	-.0044	0.0000	-.1007	.0565	.1161	19.	.4670	0.0000	0.0000	0 0 0
1330 3	.1463	-.0240	0.0000	-.0509	.0043	.1290	20.	.6430	0.0000	0.0000	0 0 0
1400 1	.1080	-.0005	0.0000	-.0925	.2609	.0282	19.	.5560	-.1617	-.3696	0 0 0
1400 2	.1194	.0024	0.0000	-.0130	.2679	.0251	19.	.3400	0.0000	0.0000	0 0 0
1400 3	.1065	-.0175	0.0000	.1310	.2820	.0419	20.	.5490	0.0000	0.0000	0 0 0
1430 1	.3039	.0037	0.0000	-.5066	-.0130	.0907	20.	.7520	.3888	.4332	0 0 0
1430 2	.3338	.0034	0.0000	-.5038	.0478	.1057	20.	.5390	0.0000	0.0000	0 0 0
1430 3	.2808	-.0163	0.0000	-.1830	.0367	.1534	20.	.7220	0.0000	0.0000	0 0 0
1600 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1600 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1600 3	.2611	-.0152	0.0000	-.2637	.0374	.0164	20.	.4340	0.0000	0.0000	0 0 0
1630 1	.1574	-.0012	0.0000	-.0453	.1630	-.0085	19.	.3120	-.6176	-.4324	0 0 0
1630 2	.1558	.0111	0.0000	.0207	.1526	-.0054	19.	.1980	0.0000	0.0000	0 0 0
1630 3	.1434	-.0231	0.0000	.0511	.1097	-.0125	19.	.1890	0.0000	0.0000	0 0 0
1700 1	.0329	-.0021	0.0000	.1231	.0679	-.0463	18.	.3440	-1.0475	-2.4223	0 0 0
1700 2	.0290	.0107	0.0000	.0172	.1106	-.0349	19.	.3150	0.0000	0.0000	0 0 0
1700 3	-.0036	-.0215	0.0000	.1342	.0754	-.0435	19.	.3450	0.0000	0.0000	0 0 0
1730 1	-.0645	.0019	0.0000	.3341	-.0280	-.0593	17.	.6910	1.2322	-.7.19	0 0 0
1730 2	-.0659	.0194	0.0000	.2770	-.0231	-.0503	18.	.3670	0.0000	0.0000	0 0 0
1730 3	-.0641	-.0207	0.0000	.4185	-.0001	-.0518	17.	.4820	0.0000	0.0000	0 0 0
1800 1	-.0415	.0001	0.0000	.3312	.0158	-.0520	15.	.6450	-.1814	.0070	0 0 0
1800 2	-.0593	.0204	0.0000	.3337	.0120	-.0405	16.	.4710	0.0000	0.0000	0 0 0
1800 3	-.0704	-.0204	0.0000	.4858	-.0183	-.0537	16.	.6150	0.0000	0.0000	0 0 0

TIME SITE	MEAN	USD	VSD	WSD	RUM	REYNOLDS	RUV	STRESSES	RHV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	CM/SEC	CM/SEC	ST DEVDYNES/CM2.....					CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
											RAD	RAD	RAD	RAD	RAD	RAD
50367																
1830 1	232.62	50.64	36.02	23.21	-360	.044	.027	235.25	.004	.100	.018	.149	0.000	0.000	0.000	0.000
1830 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1830 3	242.39	50.86	35.01	23.52	-373	-.010	-.053	244.40	-.014	.098	-.001	.143	0.000	0.000	0.000	0.000
1900 1	222.40	46.10	36.66	23.01	-353	.038	.009	225.29	.006	.105	-.080	.160	0.000	0.000	0.000	0.000
1900 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1900 3	234.48	47.78	35.82	23.10	-362	-.414	-.036	236.40	-.010	.100	-.107	.151	0.000	0.000	0.000	0.000
2000 1	253.79	62.74	37.70	26.48	-540	-.027	.032	256.50	.003	.108	-.131	.149	0.000	0.000	0.000	0.000
2000 2	345.42	63.38	42.68	29.66	-507	-.134	-.039	348.14	.035	.083	-.007	.121	0.000	0.000	0.000	0.000
2000 3	261.18	65.57	38.13	26.41	-524	-.092	-.050	263.16	-.016	.103	-.089	.144	0.000	0.000	0.000	0.000
2035 1	297.65	70.41	44.96	30.39	-757	.513	.049	300.87	.005	.108	-.225	.149	0.000	0.000	0.000	0.000
2035 2	386.51	64.15	54.54	34.18	-814	.891	-.107	390.81	.043	.088	-.122	.138	0.000	0.000	0.000	0.000
2035 3	325.31	64.15	49.41	32.43	-742	.165	-.037	327.47	-.011	.103	-.178	.150	0.000	0.000	0.000	0.000
2100 1	250.07	56.67	36.69	26.30	-523	-.074	.055	252.65	.005	.111	-.210	.147	0.000	0.000	0.000	0.000
2100 2	330.57	55.28	41.87	29.34	-486	-.235	.005	333.52	.048	.090	-.125	.125	0.000	0.000	0.000	0.000
2100 3	263.97	56.20	39.07	26.48	-447	-.268	-.020	265.57	-.012	.103	-.176	.148	0.000	0.000	0.000	0.000
2130 1	267.07	70.02	40.02	27.10	-527	-.451	.026	269.86	-.002	.106	-.227	.149	0.000	0.000	0.000	0.000
2130 2	349.27	74.02	45.18	31.75	-603	-.447	-.019	352.63	.040	.092	-.122	.129	0.000	0.000	0.000	0.000
2130 3	277.79	68.75	44.87	28.85	-531	-.746	-.014	279.83	-.011	.107	-.180	.160	0.000	0.000	0.000	0.000
2200 1	315.97	72.74	38.86	31.53	-801	.070	-.026	318.15	0.000	.106	-.310	.123	0.000	0.000	0.000	0.000
2200 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	.104	-.286	.139	0.000	0.000	0.000	0.000
2200 3	329.33	72.21	45.65	32.84	-749	-.013	-.069	329.65	-.007	.100	-.286	.139	0.000	0.000	0.000	0.000
2300 1	185.17	35.97	28.01	18.58	-234	.056	.019	187.21	0.000	.102	-.086	.148	0.000	0.000	0.000	0.000
2300 2	271.94	37.25	29.53	21.38	-283	.007	-.053	273.87	.030	.078	-.115	.109	0.000	0.000	0.000	0.000
2300 3	211.14	36.29	27.87	20.15	-283	-.018	-.009	212.29	-.011	.098	-.136	.132	0.000	0.000	0.000	0.000
2330 1	180.54	35.17	25.69	18.81	-228	-.019	.015	182.30	.004	.105	.146	.141	0.000	0.000	0.000	0.000
2330 2	252.43	32.40	26.40	19.64	-259	-.052	.012	254.11	.023	.078	.116	.103	0.000	0.000	0.000	0.000
2330 3	185.39	36.31	24.90	17.78	-217	-.135	-.005	186.64	-.021	.097	.053	.132	0.000	0.000	0.000	0.000
50467																
185.82	43.57	23.70	19.23	-230	.024	.004	.004	187.15	.006	.105	.332	.125	0.000	0.000	0.000	0.000
247.73	45.01	25.69	21.36	-277	-.016	-.003	.003	250.85	.015	.085	.331	.104	0.000	0.000	0.000	0.000
175.79	23.72	23.36	18.46	-203	-.159	-.009	.009	175.76	-.019	.106	.297	.134	0.000	0.000	0.000	0.000
186.22	46.94	41.08	21.39	-359	-.393	.040	.040	190.88	.012	.121	-.042	.237	0.000	0.000	0.000	0.000
249.44	51.81	45.73	25.74	-259	-.817	-.116	-.116	254.59	.031	.103	.156	.194	0.000	0.000	0.000	0.000
182.59	48.58	38.44	19.58	-214	-.693	-.034	-.034	185.97	-.015	.116	-.115	.243	0.000	0.000	0.000	0.000
152.96	54.70	50.60	18.04	-249	-.319	.005	.005	160.96	.017	.117	-.031	.327	0.000	0.000	0.000	0.000
0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
257.28	99.81	84.19	20.90	-715	1.557	.185	.185	269.68	.010	.140	.089	.324	0.000	0.000	0.000	0.000
0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
274.59	104.30	76.89	29.89	-718	.514	-.152	-.152	281.37	-.020	.135	.254	.275	0.000	0.000	0.000	0.000

TIME SITE	ETA	THETA	RETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
START	RAD	RAD	RAD	SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HEAT TRANSCAL/(CM2-MIN).....	MEAN ST DEV CENTIGRADE	LATENT HEAT TRANSCAL/(CM2-MIN).....	VSO F G PARTS PER THOUSAND
50367											
1830 1	-0193	-0006	0.0000	.1265	.0439	-0513	13.	.6770	.1065	.0495	-0514
1830 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
1830 3	.0011	-0204	0.0000	.0749	.0754	-0479	14.	.5950	0.0000	0.0000	0
1900 1	-0804	0.0000	0.0000	.2081	.0281	-0480	12.	.5100	.1689	.0365	-0496
1900 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
1900 3	-1135	-0165	0.0000	.2391	.0003	-0442	12.	.5160	0.0000	0.0000	0
2000 1	-1321	-0040	0.0000	.1764	-.0011	-0405	10.	.3270	.0178	-.0181	-0367
2000 2	.0054	.0328	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2000 3	-.0910	-.0229	0.0000	.2006	.0036	-.0342	10.	.2600	0.0000	0.0000	0
2035 1	-.2203	-.0028	0.0000	.2840	.0444	-.0459	9.	.3300	.5294	.1421	-0408
2035 2	-.1188	.0491	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2035 3	-.1765	-.0183	0.0000	.2085	.0232	-.0382	10.	.2680	0.0000	0.0000	0
2100 1	-.2122	-.0023	0.0000	.2113	-.0226	-.0394	9.	.3500	.1156	-.0027	-0378
2100 2	-.1285	.0447	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2100 3	-.1797	-.0181	0.0000	.2021	-.0355	-.0307	9.	.3500	0.0000	0.0000	0
2130 1	-.2343	-.0093	0.0000	.1521	-.0134	-.0366	8.	.2820	.0780	.0117	-0355
2130 2	-.1273	.0371	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2130 3	-.1886	-.0173	0.0000	.1951	-.0121	-.0294	9.	.2490	0.0000	0.0000	0
2200 1	-.3113	-.0073	0.0000	.2003	0.0000	-.0393	8.	.2720	.1330	.0153	-0349
2200 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2200 3	-.2862	-.0134	0.0000	.2018	.0052	-.0340	9.	.1950	0.0000	0.0000	0
2300 1	-.0854	-.0054	0.0000	.1032	.0061	-.0231	8.	.2970	.0670	.0046	-0221
2300 2	-.1164	.0277	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2300 3	-.1373	-.0173	0.0000	.0851	-.0022	-.0207	8.	.1490	0.0000	0.0000	0
2330 1	.1471	-.0015	0.0000	.0925	.0012	-.0212	8.	.2500	.0771	-.0044	-0215
2330 2	.1162	.0202	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
2330 3	.0511	-.0271	0.0000	.1047	-.0131	-.0194	8.	.2270	0.0000	0.0000	0
50467											
1	.3350	.0007	0.0000	.1149	-.0022	-.0200	7.	.2150	.0711	.0019	-0210
2	.4566	.0117	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
3	.2920	-.0254	0.0000	.0973	-.0115	-.0154	8.	.2310	0.0000	0.0000	0
30 1	-.0552	.0029	0.0000	.0888	.0306	-.0275	7.	.2580	.0911	.0039	-0282
30 2	.1442	.0290	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
30 3	-.1375	-.0203	0.0000	.0917	.0401	-.0211	8.	.2100	0.0000	0.0000	0
100 1	-.0440	.0104	0.0000	.2324	.1036	-.0568	7.	.2960	.1276	-.0835	-0254
100 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
100 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
1200 1	.1222	.0030	0.0000	-.1772	-.1143	.1783	18.	.8770	0.0000	0.0000	0
1200 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0
1200 3	.2466	-.0272	0.0000	-.1789	.0660	.1477	20.	.7930	0.0000	0.0000	0

TIME SITE	MEAN	USD	WSD	WSD	RUM	RUV	RUV	HORIZ	F	GSD	WIND	WIND
START	WIND	WIND ST	DEV	ST	REYNOLDS	STRESSES	CM/SEC	ELEV	ANGLE	ANGLE	DIR	SHIFT
CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....
50467												
1230 1	271.62	109.46	70.80	30.13	-807	1.072	-079	279.93	.020	.139	.222	.261
1230 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1230 3	281.22	118.17	64.18	30.84	-484	1.276	-110	284.87	-.025	.155	.309	.265
1330 1	260.99	117.02	85.67	25.86	-497	2.385	-266	273.30	.009	.109	.235	.309
1330 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1330 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1400 1	289.12	97.53	73.62	32.07	-803	.745	-105	297.77	.014	.120	.178	.252
1400 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1400 3	280.72	98.94	71.32	31.86	-345	-1.177	-177	286.87	-.020	.127	.219	.260
1430 1	303.78	87.72	83.21	33.62	-887	.097	-155	314.30	.014	.120	.106	.261
1430 2	380.95	102.22	104.49	41.21	-1.272	-4.375	-093	396.51	.035	.117	.084	.270
1430 3	312.25	96.84	89.59	34.08	-925	-.134	-203	321.88	-.013	.114	.088	.280
1500 1	340.74	90.69	87.44	36.31	-1.018	.643	-203	351.08	.011	.112	.166	.244
1500 2	435.77	108.52	104.35	46.28	-1.546	-4.542	-323	450.04	.025	.117	.072	.243
1500 3	362.14	94.45	85.22	36.54	-1.016	.509	-188	369.11	-.023	.107	.179	.234
1530 1	371.69	95.85	75.48	39.42	-1.252	.340	-087	379.03	.008	.111	.038	.200
1530 2	486.15	103.44	66.68	41.44	-1.399	-2.759	-359	492.18	.035	.090	.157	.145
1530 3	382.52	95.14	77.54	39.94	-1.281	.704	-106	388.72	-.018	.110	.002	.200
1600 1	419.19	101.68	76.52	42.88	-1.658	.859	-165	425.77	.003	.108	.237	.178
1600 2	546.56	92.64	61.61	43.61	-1.242	-.649	-332	553.61	.036	.081	.320	.111
1600 3	450.94	91.84	80.48	43.81	-1.417	-.397	-081	454.81	-.011	.102	.223	.176
1630 1	426.29	100.66	79.76	44.50	-1.329	1.109	-204	433.38	.003	.129	.135	.183
1630 2	544.85	103.42	52.93	44.58	-1.581	-.950	-343	549.63	.037	.083	.256	.095
1630 3	436.83	93.06	84.42	43.37	-1.403	.039	-260	442.32	-.014	.103	.158	.187
1700 1	444.67	105.99	68.05	44.81	-1.658	-.779	-145	449.59	.001	.107	.249	.153
1700 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1700 3	478.94	101.87	76.16	46.76	-1.626	-1.378	-071	481.75	-.010	.104	.222	.158
1730 1	439.96	111.92	66.21	45.39	-1.735	.156	-115	444.56	.001	.043	.280	.148
1730 2	580.67	105.30	60.50	46.11	-1.540	-2.357	-356	588.72	.037	.081	.367	.103
1730 3	471.42	107.36	72.67	45.99	-1.521	-1.503	-036	472.69	-.008	.102	.279	.151
1800 1	398.85	99.63	54.93	40.26	-1.420	-.186	-151	402.29	.000	.107	.302	.136
1800 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1800 3	430.83	95.96	60.03	42.51	-1.364	-.953	-056	430.87	-.007	.104	.303	.140
1830 1	337.57	85.04	43.37	35.35	-1.046	-.266	-083	340.08	.001	.110	.313	.127
1830 2	443.85	80.97	48.42	32.53	-.624	-2.024	-307	449.23	.035	.073	.309	.107
1830 3	351.62	81.14	44.24	34.83	-.919	-.642	-007	350.75	-.007	.104	.324	.128
1900 1	275.16	66.77	42.51	29.38	-.717	-.519	-070	278.51	.005	.111	.181	.155
1900 2	382.96	67.78	38.78	30.89	-.715	-2.057	-258	385.96	.034	.080	.192	.102
1900 3	285.83	67.99	44.17	29.51	-.647	-.585	-017	287.79	-.010	.107	.168	.152

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HW HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CENTIGRADE	AIR TEMP EU	EU LATENT HEAT TRANS ...CAL/(CM2-MIN)...	EW HEAT TRANS ...CAL/(CM2-MIN)...	LIMITS EXCEEDED VSQ F PARTS PER THOUSAND
50467										
1230 1	.2403	.0072	0.0000	-.5444	-.0557	.1787 19.	.8670	0.0000	0.0000	0 0 0
1230 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1230 3	.3258	-.0304	0.0000	-.0568	-.0091	.1527 20.	.7770	0.0000	0.0000	0 0 0
1330 1	.2675	.0025	0.0000	-1.2067	-.2024	.1622 19.	.7350	0.0000	0.0000	0 0 0
1330 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1330 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1400 1	.1829	.0049	0.0000	-.2863	.0315	.1122 19.	.6700	0.0000	0.0000	0 0 0
1400 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1400 3	.2107	-.0287	0.0000	-.1149	.0680	.1132 20.	.6730	0.0000	0.0000	0 0 0
1430 1	.1042	.0045	0.0000	-.2127	.0383	.1079 19.	.5220	0.0000	0.0000	0 0 0
1430 2	.0566	-.0277	0.0000	-.2209	.1027	.1091 19.	.4860	0.0000	0.0000	0 0 0
1430 3	.0872	-.0236	0.0000	-.1083	.1000	.1041 21.	.5130	0.0000	0.0000	0 0 0
1500 1	.1694	.0033	0.0000	-.2491	-.0070	.0876 19.	.4170	0.0000	0.0000	0 0 0
1500 2	.0521	.0184	0.0000	-.2052	.0586	.1144 19.	.3340	0.0000	0.0000	0 0 0
1500 3	.1725	-.0314	0.0000	-.2661	-.0432	.0800 20.	.3960	0.0000	0.0000	0 0 0
1530 1	-.0377	.0004	0.0000	-.2741	.0125	.0605 19.	.3410	0.0000	0.0000	0 0 0
1530 2	-.1704	.0305	0.0000	-.2871	.1178	.0835 19.	.3180	0.0000	0.0000	0 0 0
1530 3	-.0001	-.0265	0.0000	-.2342	.0058	.0597 20.	.2900	0.0000	0.0000	0 0 0
1600 1	-.2337	-.0049	0.0000	-.1887	.0156	.0471 18.	.2440	0.0000	0.0000	0 0 0
1600 2	-.3264	.0325	0.0000	-.1384	.0357	.0404 18.	.2970	0.0000	0.0000	0 0 0
1600 3	-.2242	-.0185	0.0000	-.1300	-.0061	.0354 19.	.3270	0.0000	0.0000	0 0 0
1630 1	-.1305	-.0043	0.0000	-.1565	-.0216	.0234 17.	.2420	0.0000	0.0000	0 0 0
1630 2	-.2624	.0337	0.0000	-.1765	.0114	.0185 18.	.2810	0.0000	0.0000	0 0 0
1630 3	-.1573	-.0214	0.0000	-.0891	-.0422	.0208 19.	.2050	0.0000	0.0000	0 0 0
1700 1	-.2540	-.0066	0.0000	-.1844	.0481	-.0061 16.	.3820	0.0000	0.0000	0 0 0
1700 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1700 3	-.2262	-.0176	0.0000	-.1391	.0360	-.0070 18.	.4360	0.0000	0.0000	0 0 0
1730 1	-.2807	-.0094	0.0000	.1461	-.0125	-.0364 15.	.3600	0.0000	0.0000	0 0 0
1730 2	-.3783	.0340	0.0000	.0322	-.0408	-.0345 16.	.3640	0.0000	0.0000	0 0 0
1730 3	-.2833	-.0146	0.0000	.1524	-.0597	-.0292 16.	.4130	0.0000	0.0000	0 0 0
1800 1	-.3030	-.0075	0.0000	.3176	-.0107	-.0614 14.	.4470	0.0000	0.0000	0 0 0
1800 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1800 3	-.3060	-.0140	0.0000	.3548	-.0108	-.0493 15.	.4460	0.0000	0.0000	0 0 0
1830 1	-.3171	-.0064	0.0000	.4818	-.0452	-.0572 12.	.4680	0.0000	0.0000	0 0 0
1830 2	-.3217	.0330	0.0000	.3470	-.1275	-.0388 13.	.3820	0.0000	0.0000	0 0 0
1830 3	-.3277	-.0141	0.0000	.3806	-.0664	-.0452 14.	.4720	0.0000	0.0000	0 0 0
1900 1	-.1885	-.0025	0.0000	.2850	-.0213	-.0353 11.	.4440	0.0000	0.0000	0 0 0
1900 2	-.2082	.0304	0.0000	.1695	-.0529	-.0508 12.	.3790	0.0000	0.0000	0 0 0
1900 3	-.1734	-.0180	0.0000	.2298	-.0058	-.0440 12.	.4120	0.0000	0.0000	0 0 0

TIME S:TE	MEAN	USD	VSD	WSD	RUM	REYNOLDS	RUV	RUV	RUV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	WIND	WIND	ST	REYNOLDS	STRESSSES	CM/SEC	ELEV	ANGLE	ANGLE	ANGLE	ANGLE	ANGLE	ANGLE	DIR	SHIFT
CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....
50467																
1930 1	278.77	71.03	48.72	28.97	-625	-991	.111	282.81	-0.02	.107	-0.186	.174	0.000	0.000	0.000	0.000
1930 2	373.40	65.37	44.57	31.06	-522	-2.286	.217	377.04	.039	.082	-0.186	.120	0.000	0.000	0.000	0.000
1930 3	294.41	68.59	46.41	30.45	-597	-837	.006	295.36	-0.12	.106	-0.191	.158	0.000	0.000	0.000	0.000
2000 1	292.97	71.25	43.76	31.21	-727	-696	.078	296.05	0.000	.111	-0.227	.149	0.000	0.000	0.000	0.000
2000 2	398.31	72.16	40.62	33.23	-751	-2.050	.275	401.76	.040	.082	-0.227	.103	0.000	0.000	0.000	0.000
2000 3	291.21	62.38	43.65	30.29	-628	-1.172	-.014	292.42	-0.10	.107	-0.240	.149	0.000	0.000	0.000	0.000
2030 1	335.65	78.57	47.21	34.97	-1.028	-735	.086	338.74	0.000	.110	-0.291	.141	0.000	0.000	0.000	0.000
2030 2	448.08	78.42	48.88	34.99	-903	-2.042	.336	448.32	.037	.079	-0.295	.109	0.000	0.000	0.000	0.000
2030 3	345.54	75.73	49.71	34.99	-871	-857	-.038	346.11	-0.08	.106	-0.282	.144	0.000	0.000	0.000	0.000
50567																
735 1	231.23	60.86	48.49	25.20	-537	-731	.099	236.36	-0.04	.119	-0.169	.221	0.000	0.000	0.000	0.000
735 2	288.51	62.72	49.66	28.86	-264	-675	.039	294.13	.016	.106	-0.186	.178	0.000	0.000	0.000	0.000
735 3	235.93	59.41	42.03	25.80	-577	-934	-.166	242.48	-0.03	.117	-0.003	.260	0.000	0.000	0.000	0.000
800 1	196.85	64.81	60.32	23.10	-469	-879	.098	205.54	.004	.131	-0.167	.304	0.000	0.000	0.000	0.000
800 2	238.85	63.97	55.23	29.50	-139	-1.594	-.214	249.28	.034	.131	-0.165	.274	0.000	0.000	0.000	0.000
800 3	215.24	68.91	65.66	25.25	-419	-731	-.125	222.92	-0.08	.131	-0.079	.298	0.000	0.000	0.000	0.000
830 1	248.65	115.80	90.72	28.08	-413	6.591	.183	264.70	0.000	.122	.062	.382	0.000	0.000	0.000	0.000
830 2	301.98	134.01	107.60	35.89	-959	9.100	-.648	322.44	.019	.131	.066	.346	0.000	0.000	0.000	0.000
830 3	236.69	112.41	77.03	28.27	-673	-354	-.328	246.41	-0.10	.134	.032	.337	0.000	0.000	0.000	0.000
900 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
900 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
900 3	355.22	78.60	79.27	37.04	-980	.281	-.035	361.70	-0.020	.109	.129	.218	0.000	0.000	0.000	0.000
930 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
930 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
930 3	92.99	47.44	77.57	39.84	-1.154	.119	-.154	398.43	-0.020	.106	.124	.192	0.000	0.000	0.000	0.000
1000 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1000 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1000 3	24.69	91.90	74.15	42.21	-1.487	.914	-.383	427.30	-0.022	.107	.261	.173	0.000	0.000	0.000	0.000
1030 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1030 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1030 3	429.63	98.38	90.35	44.16	-1.560	1.166	-.155	435.50	-0.018	.109	.219	.210	0.000	0.000	0.000	0.000
1100 1	386.50	106.08	87.68	41.03	-1.446	.901	.166	396.04	.004	.111	-0.097	.223	0.000	0.000	0.000	0.000
1100 2	530.71	119.56	99.80	43.98	-1.269	2.148	-.388	511.66	.019	.092	-0.085	.195	0.000	0.000	0.000	0.000
1100 3	257.34	110.74	50.16	40.82	-1.200	.342	-.327	404.93	-0.013	.108	-0.115	.222	0.000	0.000	0.000	0.000
1130 1	349.75	93.94	104.02	37.99	-1.054	3.055	.186	364.54	.003	.113	-0.068	.291	0.000	0.000	0.000	0.000
1130 2	447.89	101.04	122.22	42.89	-1.285	5.080	-.483	466.32	.023	.095	-0.080	.267	0.000	0.000	0.000	0.000
1130 3	366.00	206.04	249.20	0.00	-1.538	383.740	-.527	2.39	-0.013	.111	-0.102	.267	0.000	0.000	0.000	0.000

TIME SITE START	ETA RAD	THEYA RAD	BETA RAD	HU SENSIBLE HEAT ...CAL/(CM2-MIN)...	HV HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CEN:GRADE	AIR TEMP EU	FV TATENT HEAT TRANS ...CAL/(CM2-MIN)...	FW EU	LIMITS EXCEEDED VSO F G PARTS PER THOUSAND
50467										
1930 1	-1969	-0097	0.0000	2861	-0279	-0456 11.	1450	0.0000	0.0000	0 0 0
1930 2	-2028	0367	0.0000	1371	-0573	-0400 11.	2730	0.0000	0.0000	0 0 0
1930 3	-1988	-0187	0.0000	2653	-0230	-0405 12.	3463	0.0000	0.0000	0 0 0
2000 1	-2473	-0083	0.0000	3276	-0666	-0525 10.	3590	0.0000	0.0000	0 0 0
2000 2	-2413	0370	0.0000	2676	-1193	-0541 11.	3370	0.0000	0.0000	0 0 0
2000 3	-2410	-0167	0.0000	2601	-0370	-0403 11.	2640	0.0000	0.0000	0 0 0
2030 1	-2985	-0080	0.0000	2233	-0017	-0514 10.	2520	0.0000	0.0000	0 0 0
2030 2	-3082	0334	0.0000	1873	-0373	-0520 10.	2470	0.0000	0.0000	0 0 0
2030 3	-2858	-0154	0.0000	3250	0217	-0453 11.	2750	0.0000	0.0000	0 0 0
50567										
735 1	-1823	-0146	0.0000	-3127	1267	1257 13.	14560	0.0000	0.0000	0 0 0
735 2	-1960	0140	0.0000	-0161	-0823	0743 13.	13680	0.0000	0.0000	0 0 0
735 3	-0023	-0133	0.0000	-2882	-1233	1171 14.	5900	0.0000	0.0000	0 0 0
800 1	-1810	-0070	0.0000	-0935	-0254	0902 13.	5680	0.0000	0.0000	0 0 0
800 2	-1881	0345	0.0000	-0141	-0213	0961 13.	3850	0.0000	0.0000	0 0 0
800 3	0647	-0174	0.0000	-2021	0121	1075 14.	5490	0.0000	0.0000	0 0 0
830 1	1536	-0047	0.0000	1240	1181	0319 13.	2610	0.0000	0.0000	0 0 0
830 2	1501	0100	0.0000	2042	1315	0354 13.	2500	0.0000	0.0000	0 0 0
830 3	0138	-0201	0.0000	-2161	-0899	0437 14.	3060	0.0000	0.0000	0 0 0
900 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
900 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
900 3	1284	-0281	0.0000	-1860	0334	0576 14.	2200	0.0000	0.0000	0 0 0
930 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
930 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
930 3	1243	-0273	0.0000	-2621	0637	0504 15.	2890	0.0000	0.0000	0 0 0
1000 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1000 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1000 3	2637	-0303	0.0000	-3216	0282	1049 15.	3920	0.0000	0.0000	0 0 0
1030 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1030 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1030 3	2222	-0265	0.0000	-5607	0493	11576 16.	6070	0.0000	0.0000	0 0 0
1100 1	-0925	-0040	0.0000	-3158	0145	1134 14.	4260	0.0000	0.0000	0 0 0
1100 2	-0787	0153	0.0000	-2389	-0462	1068 14.	3820	0.0000	0.0000	0 0 0
1100 3	-1121	-0217	0.0000	-3587	-0200	1063 16.	4340	0.0000	0.0000	0 0 0
1130 1	-0438	-0049	0.0000	-2301	1061	1036 14.	4770	0.0000	0.0000	0 0 0
1130 2	-0575	0180	0.0000	-1140	0875	1035 14.	3340	0.0000	0.0000	0 0 0
1130 3	-0536	0.0000	0.0000	-2673	0857	1069 16.	4610	0.0000	0.0000	0 0 0

TIME SITE	MEAN	USD	VSD	WSD	RUM	PJV	RWV	HORIZ	F	FSD	G	GSD	WIND
START	WIND	WIND	ST	DEV	REYNOLDS STRESSES	DYNES/CM ²	CM/SEC	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR
CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....
42267													
923 1	199.81	54.77	52.69	24.01	-376	.030	0.000	206.22	.008	.135	-.255	.227	0.000
923 2	200.51	66.20	51.66	23.55	-414	-.084	0.000	206.32	.054	.133	-.231	.251	0.000
923 3	203.50	64.87	51.39	23.34	-372	.033	0.000	207.41	-.004	.131	-.261	.246	0.000
953 1	230.16	67.17	65.04	25.94	-507	.184	0.000	233.70	.005	.121	-.174	.271	0.000
953 2	230.36	68.18	63.82	26.06	-529	.083	0.000	236.14	.048	.121	-.173	.240	0.000
953 3	233.85	66.75	63.51	25.24	-512	.130	0.000	240.00	-.062	.118	-.181	.262	0.000
1108 1	315.74	95.33	69.26	33.55	-1138	.146	0.000	322.72	.004	.118	-.335	.208	0.000
1108 2	324.42	92.90	64.69	32.43	-1037	.1206	0.000	329.35	.049	.107	-.328	.187	0.000
1108 3	328.14	88.09	64.28	22.87	-926	-.486	0.000	330.27	-.015	.109	-.321	.190	0.000
1158 1	345.28	88.87	93.68	37.35	-995	.124	0.000	355.46	.007	.113	-.009	.266	0.000
1158 2	342.61	89.76	94.38	38.42	-1136	.185	0.000	354.45	-.012	.118	.010	.270	0.000
1158 3	349.24	80.60	93.12	58.41	-1174	.717	0.000	359.30	.021	.116	0.000	.264	0.000
1230 1	365.86	98.33	108.22	39.83	-1379	-.583	0.000	380.97	.012	.115	-.025	.284	0.000
1230 2	365.11	94.48	109.73	40.98	-1298	-.738	0.000	380.53	-.007	.117	-.006	.289	0.000
1230 3	373.01	92.57	107.23	41.07	-1252	-.503	0.000	385.74	.073	.114	-.027	.278	0.000
1300 1	352.34	97.35	85.55	37.03	-1022	-.1406	0.000	362.78	.005	.111	-.102	.250	0.000
1300 2	351.49	98.43	86.63	36.91	-1151	-.1280	0.000	362.03	-.007	.113	-.084	.253	0.000
1300 3	355.25	98.16	86.53	33.58	-1127	-.1550	0.000	363.63	.016	.115	-.093	.245	0.000
1411 1	382.65	89.78	84.68	38.81	-1224	-.518	0.000	391.16	.063	.105	-.246	.221	0.000
1411 2	379.32	88.74	84.10	39.88	-1325	-.553	0.000	384.31	.006	.110	-.246	.219	0.000
1411 3	364.92	92.41	80.39	39.37	-1355	-.213	0.000	389.39	-.056	.110	-.231	.212	0.000
1441 1	350.86	94.51	86.96	36.27	-1072	-.389	0.000	356.52	.065	.110	-.281	.192	0.000
1441 2	349.29	82.86	65.58	26.94	-1065	-.139	0.000	355.16	.005	.110	-.280	.188	0.000
1441 3	354.57	82.60	65.23	36.71	-1038	-.065	0.000	356.75	-.062	.109	-.261	.187	0.000
1515 1	347.05	79.51	60.84	36.25	-.998	-.640	0.000	351.62	.067	.110	-.248	.176	0.000
1515 2	344.56	77.77	60.22	36.43	-.995	-.368	0.000	349.57	.005	.110	-.252	.174	0.000
1515 3	347.03	78.87	59.13	36.56	-1126	-.483	0.000	346.85	.000	0.000	-.240	.173	0.000
1611 1	326.07	82.82	63.85	34.24	-1067	.182	0.000	321.49	.070	.112	-.223	.195	0.000
1611 2	323.11	79.96	63.85	34.66	-1000	.615	0.000	328.97	.002	.113	-.184	.192	0.000
1611 3	325.62	80.40	62.56	34.84	-1040	.210	0.000	328.93	-.056	.113	-.176	.190	0.000
1640 1	373.39	99.70	23.64	33.29	-1134	.203	0.000	373.74	-.037	.096	-.544	.079	0.000
1640 2	393.35	107.37	23.20	22.24	-1182	-.205	0.000	393.16	.057	.086	-.482	.071	0.000
1640 3	393.02	97.26	26.06	34.06	-1112	.628	0.000	387.02	.018	.098	-.474	.080	0.000
1723 1	291.21	79.46	81.39	32.18	-.783	-.2330	0.000	300.83	-.055	.114	-.131	.256	0.000
1723 2	294.77	78.78	81.78	32.28	-.766	-.2560	0.000	304.35	.058	.111	-.133	.253	0.000
1723 3	302.09	81.01	81.71	31.76	-.767	-.2824	0.000	309.41	-.053	.109	-.122	.243	0.000
1753 1	204.21	73.11	42.57	23.16	-.487	-.1419	0.000	206.54	-.095	.116	-.272	.231	0.000
1753 2	208.62	72.51	42.38	23.71	-.408	-.1639	0.000	212.77	.064	.112	-.257	.223	0.000
1753 3	216.39	75.14	43.49	22.65	-.383	-.1653	0.000	218.81	.039	.103	-.260	.227	0.000

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	EW LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED	
										VSO F	G
42267											
923 1	-2522	-0034	0210	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
923 2	-2527	0440	-0340	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
923 3	-2523	-0160	0460	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
953 1	-1687	-0051	0150	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
953 2	-1702	0397	-0350	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
953 3	-1704	-0102	0420	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1108 1	-3404	-0066	0150	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1108 2	-3340	0418	-0220	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1108 3	-3185	-0232	0580	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1158 1	-0091	-0001	0200	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1158 2	0098	-0217	-0500	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1158 3	0067	0135	0530	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1230 1	-0272	0034	0200	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1230 2	-0109	-0162	-0540	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1230 3	-0309	0152	0560	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1300 1	-1107	-0032	0310	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1300 2	-0914	-0162	-0610	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1300 3	-0995	0081	0750	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1411 1	-2480	0578	0600	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1411 2	-2488	-0014	-0500	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1411 3	-2500	-0454	0420	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1441 1	-2820	0584	0890	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1441 2	-2803	-0024	-0630	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1441 3	-2583	-0498	0310	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1515 1	-2520	0604	0890	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1515 2	-2545	-0020	-0580	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1515 3	-2403	-0627	0400	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1611 1	-2115	0625	0110	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1611 2	-1797	-0064	-0570	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1611 3	-1723	-0452	0430	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1640 1	-5448	-0452	1800	0877	0026	-0233	12.1890	0.0000	0.0000	0	0
1640 2	-4876	0512	-1700	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1640 3	-4654	0111	-0520	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1723 1	-1471	-0657	0030	0652	0950	-0219	11.1730	0.0000	0.0000	0	0
1723 2	-1506	0427	0010	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1723 3	-1382	0440	0100	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1753 1	-2940	-0654	-0190	0370	-1039	-0225	11.2380	0.0000	0.0000	0	0
1753 2	-2913	0560	0490	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1753 3	-2818	0795	1320	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0

42267													
TIME SITE	MEAN	USD	VSD	WSD	RUN	RUV	RHW	HORIZ	F	FSD	G	GSD	WIND
START	WIND	CM/SEC	CM/SEC	ST DEV	REYNOLDS	DYNES/CM2	STRESSES	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR
									RAD	RAD	RAD	RAD	SHIFT
1830 1	132.68	19.21	28.90	8.22	-0.036	-0.276	0.000	135.48	-0.054	-0.059	-0.217	-0.209	0.000
1830 2	130.45	24.04	30.18	8.83	-0.045	-0.501	0.000	133.74	-0.038	-0.065	-0.230	-0.230	0.000
1830 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1900 1	164.76	46.74	33.66	15.79	-0.167	-0.330	0.000	167.72	-0.057	-0.088	-0.097	-0.202	0.000
1900 2	166.58	46.98	33.93	16.05	-0.164	-0.406	0.000	169.72	-0.049	-0.090	-0.143	-0.204	0.000
1900 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1930 1	180.91	42.51	28.23	18.17	-0.218	-0.342	0.000	182.61	-0.059	-0.099	-0.051	-0.150	0.000
1930 2	183.69	41.84	28.64	18.23	-0.196	-0.374	0.000	185.52	-0.055	-0.097	-0.008	-0.149	0.000
1930 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2000 1	190.10	40.30	34.65	20.77	-0.272	-0.485	0.000	192.75	-0.060	-0.109	-0.163	-0.180	0.000
2000 2	193.84	41.14	37.30	20.27	-0.258	-0.598	0.000	196.89	-0.062	-0.104	-0.125	-0.186	0.000
2000 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2030 1	183.16	51.64	38.84	20.76	-0.283	-0.521	0.000	187.11	-0.054	-0.135	-0.247	-0.237	0.000
2030 2	191.61	41.24	40.51	20.76	-0.289	-0.572	0.000	195.76	-0.064	-0.109	-0.215	-0.226	0.000
2030 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
42567													
900 1	254.72	66.00	59.35	28.73	-0.657	-0.383	0.000	261.59	-0.003	-0.121	-0.273	-0.235	0.000
900 2	253.28	63.81	64.75	30.26	-0.730	-0.503	0.000	261.22	-0.004	-0.125	-0.158	-0.251	0.000
900 3	264.59	66.89	59.29	28.71	-0.690	-0.723	0.000	265.51	-0.008	-0.119	-0.227	-0.232	0.000
945 1	267.36	75.54	76.92	30.96	-0.724	-0.079	0.000	277.90	-0.003	-0.123	-0.230	-0.282	0.000
945 2	266.58	72.64	82.67	31.18	-0.728	-0.016	0.000	278.47	-0.001	-0.121	-0.114	-0.298	0.000
945 3	275.35	74.55	74.99	31.74	-0.767	-0.538	0.000	278.77	0.000	-0.126	-0.188	-0.272	0.000
1015 1	312.69	92.87	81.11	31.94	-1.008	-2.208	0.000	322.84	-0.012	-0.112	-0.301	-0.257	0.000
1015 2	316.66	87.30	91.26	32.92	-0.843	-2.731	0.000	329.01	-0.005	-0.109	-0.206	-0.279	0.000
1015 3	392.64	66.71	83.58	28.63	-0.627	-1.298	0.000	394.64	-0.010	-0.086	-0.192	-0.225	0.000
1614 1	451.68	91.74	55.22	40.62	-1.290	-0.268	0.000	456.20	-0.018	-0.094	-0.186	-0.142	0.000
1614 2	450.51	94.14	78.96	41.55	-1.539	-0.508	0.000	456.97	-0.015	-0.097	-0.229	-0.172	0.000
1614 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1713 1	230.62	43.39	31.33	21.04	-0.269	-0.184	0.000	232.65	-0.015	-0.092	-0.154	-0.133	0.000
1713 2	229.56	43.24	35.91	21.10	-0.297	-0.372	0.000	232.22	-0.015	-0.093	-0.170	-0.155	0.000
1713 3	237.46	43.17	35.10	20.18	-0.210	-0.321	0.000	237.59	-0.007	-0.086	-0.166	-0.147	0.000
42667													
1330 1	196.33	116.64	53.23	24.03	-0.620	-1.241	0.000	202.81	-0.036	-0.215	-0.223	-0.316	0.000
1330 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1330 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1400 1	207.66	104.52	79.33	25.04	-0.425	-0.066	0.000	220.59	-0.020	-0.175	-0.003	-0.360	0.000
1400 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1400 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1630 1	399.60	94.17	67.46	39.41	-1.260	-0.524	0.000	404.96	-0.003	-0.103	-0.203	-0.162	0.000
1630 2	521.67	98.11	77.87	47.99	-1.284	-1.786	0.000	524.86	-0.097	-0.093	-0.207	-0.145	0.000
1630 3	425.92	103.42	66.56	43.27	-1.451	-0.537	0.000	422.20	-0.007	-0.112	-0.275	-0.165	0.000

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
STAPT	RAD	RAD	RAD	SENSIBLE HEAT TRANSCAL/(CM2-MIN).....CAL/(CM2-MIN).....CAL/(CM2-MIN).....	MEAN ST DEV CENTIGRADECAL/(CM2-MIN).....CAL/(CM2-MIN).....CAL/(CM2-MIN).....	VSO F G PARTS PER THOUSAND
42267											
1830 1	0.2049	-0.0580	0.0520	0.0234	0.0025	-0.0052	9.	0.1790	0.0000	0.0000	0 0 0
1830 2	0.2526	0.0390	-0.0480	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1830 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1900 1	0.0868	-0.0620	0.0360	0.1799	-0.0363	-0.0168	9.	0.3190	0.0000	0.0000	0 0 0
1900 2	0.1306	0.0437	-0.0310	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1900 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1930 1	-0.0595	-0.0654	0.0220	0.1192	-0.0122	-0.0138	9.	0.1960	0.0000	0.0000	0 0 0
1930 2	-0.0169	0.0310	-0.0040	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1930 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
2000 1	-0.1743	-0.0670	-0.0070	0.1130	-0.0677	-0.0173	9.	0.2460	0.0000	0.0000	0 0 0
2000 2	-0.1379	0.0584	-0.0130	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
2000 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
2030 1	-0.2637	-0.0640	0.0140	0.0017	0.0251	-0.0145	10.	0.1890	0.0000	0.0000	0 0 0
2030 2	-0.2260	0.0590	-0.0160	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
2030 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
42567											
900 1	-0.2745	-0.0059	0.0380	-0.1606	-0.0146	0.0885	10.	0.4480	0.0000	0.0000	0 0 0
900 2	-0.1608	-0.0660	-0.0330	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
900 3	-0.2255	-0.0180	0.0640	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
945 1	-0.2291	-0.0056	0.0410	-0.0769	0.0367	0.1453	11.	0.8400	0.0000	0.0000	0 0 0
945 2	-0.1159	-0.0115	-0.0300	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
945 3	-0.1880	-0.0095	0.0200	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1015 1	-0.3156	0.0220	0.0540	-0.5127	-0.0124	0.2226	13.	0.8570	0.0000	0.0000	0 0 0
1015 2	-0.2256	-0.0071	-0.0260	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1015 3	-0.1949	-0.0144	0.1100	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1614 1	0.1883	0.0129	0.0640	-0.2549	0.1268	0.687	14.	0.5140	0.0000	0.0000	0 0 0
1614 2	0.2310	-0.0230	-0.0330	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1614 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1713 1	0.1532	0.0110	0.0600	0.2458	-0.0423	-0.0358	10.	0.5720	0.0000	0.0000	0 0 0
1713 2	0.1655	-0.0200	-0.0220	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1713 3	0.1604	-0.0104	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
42667											
1330 1	0.2894	0.0191	0.0000	0.0962	-0.1262	0.1324	15.	1.0100	0.0000	0.0000	0 0 0
1330 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1330 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1400 1	-0.0027	0.0075	0.0260	-0.0868	-0.0306	0.1309	15.	0.5470	0.0000	0.0000	0 0 0
1400 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1400 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1630 1	-0.2068	-0.0041	0.0150	0.0231	0.0311	-0.0185	13.	0.3100	0.0000	0.0000	0 0 0
1630 2	-0.2139	0.0942	-0.0020	0.0040	-0.0012	-0.0166	13.	0.1880	0.0000	0.0000	0 0 0
1630 3	-0.2726	-0.0154	-0.0240	0.0803	-0.0340	-0.0259	10.	0.2270	0.0000	0.0000	0 0 0

TIME SITE START	MEAN WIND	USD WIND	USD ST DEV	WSD DEV	RUM REYNOLDS STRESSES DYNES/CM2	RUV STRESSES DYNES/CM2	RWV CM/SEC	HORIZ WIND CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM PAD	GSD ANGLE RAD	WIND DIR RAD	WIND SHIFT RAD
42667														
1700 1	394.20	90.33	61.37	38.24	-1.197	-0.052	0.000	398.76	.005	.100	-.169	.151	0.000	0.000
1700 2	512.94	92.34	69.67	48.16	-1.274	-.658	0.000	515.71	.086	.092	-.174	.134	0.000	0.000
1700 3	425.03	104.19	63.97	42.98	-1.407	-.357	0.000	422.77	-.007	.112	-.236	.157	0.000	0.000
1730 1	414.43	92.79	54.94	37.93	-1.329	.442	0.000	417.82	-.003	.096	-.354	.128	0.000	0.000
1730 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1730 3	432.53	100.54	48.36	42.82	-1.160	1.078	0.000	419.10	-.001	.108	-.419	.117	0.000	0.000
1800 1	377.75	82.02	46.09	34.55	-.974	.083	0.000	380.37	-.001	.096	-.369	.119	0.000	0.000
1800 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1800 3	405.39	100.10	47.56	43.75	-.535	2.211	0.000	391.38	.001	.115	-.447	.116	0.000	0.000
1900 1	271.67	62.02	37.61	27.10	-.642	-.262	0.000	274.17	.004	.106	-.276	.138	0.000	0.000
1900 2	362.88	61.57	61.35	35.19	-.646	1.585	0.000	364.41	.140	.100	-.322	.165	0.000	0.000
1900 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1930 1	256.91	57.17	35.77	24.58	-.457	-.258	0.000	259.25	-.001	.098	-.272	.136	0.000	0.000
1930 2	339.07	53.52	60.64	30.84	-.328	1.542	0.000	341.11	.138	.093	-.315	.176	0.000	0.000
1930 3	226.94	59.78	55.62	31.88	-.725	.098	0.000	230.78	-.004	.176	-.034	.265	0.000	0.000
2000 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
2000 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
2000 3	205.77	73.28	41.32	29.79	-.292	1.025	0.000	200.78	.009	.208	-.447	.235	0.000	0.000
42767														
930 1	448.69	124.90	104.97	45.23	-1.984	.833	0.000	460.29	0.000	.108	-.218	.227	0.000	0.000
930 2	564.70	120.39	131.94	54.04	-1.570	1.511	0.000	579.86	.040	.099	-.066	.238	0.000	0.000
930 3	479.21	128.44	98.94	48.40	-1.639	-.408	0.000	482.00	-.004	.106	-.162	.207	0.000	0.000
1000 1	420.42	107.86	111.78	43.91	-1.602	-.2.658	0.000	434.64	.001	.109	-.114	.258	0.000	0.000
1000 2	535.34	123.79	135.04	51.87	-1.974	-.6326	0.000	551.39	.040	.100	.014	.247	0.000	0.000
1000 3	455.61	121.34	112.13	45.89	-1.714	-.3.367	0.000	462.20	-.005	.108	-.087	.243	0.000	0.000
1030 1	422.00	119.38	109.20	42.50	-1.551	-1.533	0.000	435.79	0.000	.105	-.168	.258	0.000	0.000
1030 2	534.32	117.77	126.56	46.48	-2.154	2.058	0.000	548.77	.042	.094	-.063	.240	0.000	0.000
1030 3	451.30	115.04	95.05	44.94	-1.423	.039	0.000	423.07	-.001	.105	-.200	.214	0.000	0.000
1100 1	405.70	119.85	121.79	42.04	-1.566	-1.892	0.000	423.09	.003	.107	-.032	.293	0.000	0.000
1100 2	498.94	139.04	136.47	49.79	-2.029	.994	0.000	516.77	.040	.108	-.107	.274	0.000	0.000
1100 3	424.64	115.91	120.90	42.54	-1.341	-1.645	0.000	433.71	-.009	.104	-.033	.278	0.000	0.000
1130 1	412.00	114.36	85.26	39.46	-1.289	1.813	0.000	420.78	.004	.102	.254	.214	0.000	0.000
1130 2	501.54	142.03	84.04	41.82	-1.091	1.680	0.000	507.90	.009	.090	.381	.175	0.000	0.000
1130 3	426.16	127.97	93.43	40.22	-1.250	1.004	0.000	424.95	-.018	.105	.283	.232	0.000	0.000
1200 1	473.71	120.97	66.76	40.02	-1.389	.891	0.000	477.94	.009	.091	.394	.134	0.000	0.000
1200 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1200 3	494.01	124.31	78.80	42.59	-1.383	-.059	0.000	484.23	-.019	.097	.370	.173	0.000	0.000
1400 1	515.13	124.80	128.72	51.79	-2.214	-3.517	0.000	529.74	.003	.105	-.003	.230	0.000	0.000
1400 2	675.53	131.51	152.45	56.67	-2.398	-2.264	0.000	691.18	.037	.089	.046	.214	0.000	0.000
1400 3	542.87	128.24	122.09	55.20	-2.226	-1.584	0.000	550.13	-.008	.106	-.015	.217	0.000	0.000

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	AIR TEMPCAL/(CM2-MIN).....	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	EW LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED VSQ F G PARTS PER THOUSAND
42667											
1700 1	-0.1697	-0.0018	0.0550	0.2009	0.0254	-0.0348	13.2270	-0.2040	0.0106	-0.0278	0 0 0
1700 2	-0.1780	0.0831	0.0070	0.1221	0.0329	-0.0385	13.2110	0.0000	0.0000	0.0000	0 0 0
1700 3	-0.2345	-0.0144	-0.0300	0.1020	0.0025	-0.0345	10.2130	0.0000	0.0000	0.0000	0 0 0
1730 1	-0.3536	-0.0105	0.0370	0.3686	0.0603	-0.0613	12.3100	-0.0307	-0.0065	-0.0040	0 0 0
1730 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1730 3	-0.4059	-0.0081	-0.3130	0.2896	0.0878	-0.0488	11.2910	0.0000	0.0000	0.0000	0 0 0
1800 1	-0.3704	-0.0073	0.0340	0.3087	0.0092	-0.0520	11.2920	0.0410	-0.0022	-0.0169	0 0 0
1800 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1800 3	-0.4262	-0.0077	-0.5080	0.4335	0.0985	-0.0437	12.3080	0.0000	0.0000	0.0000	0 0 0
1900 1	-0.2797	-0.0035	0.0980	0.2417	-0.0207	-0.0514	10.2640	0.0000	-0.0068	-0.0261	0 0 0
1900 2	-0.3162	-0.1361	-0.1400	0.1906	0.0690	-0.0590	10.2310	0.0000	0.0000	0.0000	0 0 0
1900 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1930 1	-0.2764	-0.0081	0.0320	0.1647	0.0327	-0.0347	9.2520	0.0521	0.0200	-0.0173	0 0 0
1930 2	-0.3080	-0.1359	-0.1550	0.0954	0.1309	-0.0296	10.1980	0.0000	0.0000	0.0000	0 0 0
1930 3	-0.0329	-0.0210	-0.0310	0.0967	2.2311	-0.1166	14.2520	0.0000	0.0000	0.0000	0 0 0
2000 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2000 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2000 3	-0.4174	-0.0094	-0.2750	-0.0594	0.1961	-0.0813	0.0000	0.0000	0.0000	0.0000	0 0 0
42767											
930 1	-0.2132	-0.0104	0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
930 2	-0.0332	0.0369	-0.0300	-0.3466	0.0908	-0.2185	11.4690	0.0000	0.0000	0.0000	0 0 0
930 3	-0.1673	-0.0104	-0.0190	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1000 1	-0.1256	-0.0075	0.0190	-0.6398	-0.0775	0.2512	12.7420	-0.9212	-0.4618	-0.3438	0 0 0
1000 2	-0.0032	0.0362	-0.0720	-0.3979	-0.0483	0.2532	11.5570	0.0000	0.0000	0.0000	0 0 0
1000 3	-0.0941	-0.0138	-0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1030 1	-0.1736	-0.0077	0.0270	-0.9508	0.0861	0.2325	13.7740	-0.9108	-0.1764	-0.3499	0 0 0
1030 2	-0.0566	0.0361	-0.0540	-0.8701	0.1076	0.2706	12.6330	0.0000	0.0000	0.0000	0 0 0
1030 3	-0.1965	-0.0078	-0.0230	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1100 1	-0.0436	-0.0060	0.0280	-0.6709	-0.2798	0.2366	13.8920	-0.9550	-0.2651	-0.3497	0 0 0
1100 2	0.1073	0.0342	-0.0970	-0.4894	-0.3682	0.2942	12.6140	0.0000	0.0000	0.0000	0 0 0
1100 3	-0.0396	-0.0167	-0.0370	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1130 1	0.2664	-0.0027	0.0410	-0.6445	-0.0730	0.2401	13.9110	-0.5928	0.2044	-0.3257	0 0 0
1130 2	0.3947	0.0051	-0.1170	-0.5910	-0.0206	0.2056	12.5900	0.0000	0.0000	0.0000	0 0 0
1130 3	0.2781	-0.0247	-0.0180	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1200 1	0.3998	0.0035	0.0200	-0.6698	0.0001	0.2080	13.8390	-1.0630	0.1294	-0.5899	0 0 0
1200 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1200 3	0.3597	-0.0246	0.0300	-0.2260	-0.1310	0.2259	14.8130	0.0000	0.0000	0.0000	0 0 0
1400 1	-0.0145	-0.0042	0.0350	-0.7450	0.1479	0.1799	13.6520	-1.5430	0.2700	-0.3611	0 0 0
1400 2	0.0414	0.0343	-0.0750	-0.5774	0.0436	0.2027	12.3350	0.0000	0.0000	0.0000	0 0 0
1400 3	-0.0188	-0.0159	-0.0210	-0.8601	0.0595	0.2058	14.6490	0.0000	0.0000	0.0000	0 0 0

TIME SITE START	MEAN WIND	USD WIND ST DEV	WSD WIND ST DEV	RUN REYNOLDS STRESSES	RUV DYNES/CM ²	RHW CM/SEC	HORIZ WIND	F ELEV	FSD ANGLE	G AZIM	GSD ANGLE	WIND DIR	WIND SHIFT
.....CM/SEC.....RADRADRADRADRADRAD
42767													
1430 1	494.93	118.19	116.42	50.65	-2.272	-1.203	0.000	507.95	.003	.107	-.093	.227	0.000
1430 2	642.40	116.65	133.62	56.58	-2.434	.534	0.000	655.04	.052	.091	-.048	.202	0.000
1430 3	548.77	126.63	122.33	55.13	-2.254	-2.034	0.000	555.47	-.011	.104	-.065	.218	0.000
1500 1	434.31	104.37	116.81	44.32	-1.538	1.694	0.000	447.35	.007	.107	.108	.239	0.000
1500 2	557.22	108.71	148.32	49.67	-1.907	4.122	0.000	572.67	.035	.094	.150	.232	0.000
1500 3	480.81	109.90	121.21	46.79	-1.779	2.620	0.000	487.55	-.011	.103	.112	.243	0.000
1530 1	486.37	115.82	112.39	46.71	-2.036	2.200	0.000	499.10	.002	.104	.013	.229	0.000
1530 2	624.85	124.71	134.83	53.34	-2.199	2.262	0.000	638.99	.035	.089	.081	.218	0.000
1530 3	513.45	114.91	115.34	50.21	-1.767	3.298	0.000	520.33	-.014	.102	.044	.227	0.000
1600 1	494.72	120.76	94.35	50.00	-2.064	.344	0.000	501.72	.005	.105	.064	.169	0.000
1600 2	659.61	120.66	97.94	53.94	-1.255	-1.255	0.000	666.29	.033	.084	.113	.145	0.000
1600 3	545.42	111.19	99.93	53.58	-1.965	-.050	0.000	549.77	-.013	.102	.073	.181	0.000
1630 1	524.00	115.97	101.87	52.74	-2.295	.537	0.000	533.61	.002	.105	-.051	.191	0.000
1630 2	694.52	107.53	118.76	57.52	-2.249	-.343	0.000	703.91	.044	.085	.010	.169	0.000
1630 3	580.22	117.00	112.13	55.60	-2.190	-.120	0.000	585.71	-.011	.100	-.057	.191	0.000
1700 1	408.37	166.15	106.59	41.93	-1.429	3.344	0.000	420.56	-.001	.100	-.241	.245	0.000
1700 2	589.37	155.52	145.41	44.68	-1.381	1.344	0.000	605.23	-.041	.074	-.211	.232	0.000
1700 3	452.14	152.28	99.82	44.46	-1.587	-.520	0.000	452.76	0.000	.109	-.232	.227	0.000
1800 1	327.77	89.74	41.76	30.33	-.819	-.175	0.000	330.10	.010	.097	.380	.120	0.000
1800 2	419.82	84.42	57.51	38.30	-1.059	-.354	0.000	423.16	.014	.094	.392	.130	0.000
1800 3	333.77	115.64	42.10	29.02	-1.560	-2.469	0.000	320.41	-.025	.129	.493	.174	0.000
1900 1	184.89	39.66	29.30	18.24	-.197	.005	0.000	187.01	-.006	.096	-.010	.149	0.000
1900 2	274.11	37.93	34.00	1.01	-.205	-.036	0.000	275.96	.036	.069	0.000	.117	0.000
1900 3	213.47	41.93	31.78	19.28	-.245	-.197	0.000	214.63	-.012	.090	-.042	.144	0.000
1930 1	291.01	59.40	40.11	29.97	-.629	.008	0.000	293.69	-.007	.107	-.221	.138	0.000
1930 2	397.97	56.50	42.67	30.83	-.610	.340	0.000	399.72	.050	.079	-.198	.106	0.000
1930 3	310.37	60.83	40.20	30.28	-.713	-.212	0.000	314.76	-.005	.100	-.211	.129	0.000
2000 1	247.86	60.14	38.52	24.84	-.423	.997	0.000	250.68	-.003	.101	-.135	.149	0.000
2000 2	357.02	62.92	43.23	25.83	-.344	1.485	0.000	359.28	.037	.073	-.102	.117	0.000
2000 3	280.52	64.95	40.42	26.81	-.522	.516	0.000	281.34	-.011	.097	-.115	.143	0.000
2030 1	158.24	22.71	37.07	18.95	-.066	-2.221	0.000	162.44	-.008	.116	.173	.260	0.000
2030 2	226.33	124.34	41.92	23.52	-.274	-3.489	0.000	230.61	.038	.120	.160	.246	0.000
2030 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2300 1	149.65	19.26	22.86	10.59	-.067	.081	0.000	151.35	-.005	.069	-.035	.149	0.000
2300 2	263.88	25.67	34.01	11.41	-.088	.114	0.000	265.77	.041	.043	-.125	.126	0.000
2300 3	165.15	23.43	23.82	10.96	-.072	-.118	0.000	164.54	-.016	.066	-.208	.143	0.000
2330 1	143.43	25.86	22.52	12.54	-.106	-.058	0.000	145.19	0.000	.087	0.000	.158	0.000
2330 2	246.05	26.78	8.76	17.66	-.042	.037	0.000	247.27	.038	.057	.273	.302	0.000
2330 3	154.89	21.07	21.24	11.40	-.075	-.085	0.000	155.36	-.019	.073	-.095	.136	0.000

TIME SITE START	ETA	THETA	BETA	HU SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HV HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CENT:GRADE	EL LATENT HEAT TRANS ...CAL/(CM2-MIN)...	EW EV	VSQ PARTS PER THOUSAND	LIMITS EXCEEDED F G
42767										
1430 1	-0.953	-0.056	0.450	-0.587	0.216	1.537 13.	-0.580	-1.4133	-0.376	0
1430 2	-0.078	0.481	-0.054	-0.398	-0.070	1.847 12.	0.800	0.0000	0.0000	0
1430 3	-0.078	-0.188	-0.160	-0.594	-0.042	1.609 14.	0.510	0.0000	0.0000	0
1500 1	0.1149	0.001	0.370	-0.478	0.324	1.312 14.	0.580	-1.0473	-0.390	0
1500 2	-0.1704	0.301	-0.069	-0.3917	-0.0663	1.310 13.	0.420	0.0000	0.0000	0
1500 3	0.1170	-0.189	-0.020	-0.5244	-0.190	1.315 14.	0.5150	0.0000	0.0000	0
1530 1	0.0218	-0.051	0.390	-0.4027	0.039	1.033 14.	0.810	-1.0723	-0.133	0
1530 2	0.0872	0.313	-0.059	-0.4147	-0.0729	1.251 13.	0.3750	0.0000	0.0000	0
1530 3	0.0533	-0.020	-0.023	-0.4782	-0.1563	1.074 14.	0.4910	0.0000	0.0000	0
1600 1	0.0664	-0.027	0.450	-0.1922	-0.1449	0.316 13.	0.5680	0.0000	0.0000	0
1600 2	0.1114	0.298	-0.080	-0.1275	-0.0920	0.338 12.	0.3560	0.0000	0.0000	0
1600 3	0.0726	-0.020	-0.080	-0.0234	-0.1160	0.223 13.	0.4240	0.0000	0.0000	0
1630 1	-0.0501	-0.055	0.220	-0.0554	0.081	0.036 12.	0.3430	-0.7234	-0.057	0
1630 2	-0.0114	0.408	-0.060	-0.0885	0.232	0.272 12.	0.1710	0.0000	0.0000	0
1630 3	-0.0567	-0.174	-0.080	-0.0779	-0.0478	0.036 13.	0.2130	0.0000	0.0000	0
1700 1	-0.2466	-0.068	0.000	1.1428	0.407	-0.045 11.	0.690	-1.0444	-0.4505	0
1700 2	-0.2145	0.409	-0.028	-0.2591	-0.825	0.103 11.	0.340	0.0000	0.0000	0
1700 3	-0.2368	-0.079	-0.032	-0.4369	-0.4678	-0.0699 12.	0.4440	0.0000	0.0000	0
1800 1	0.3816	0.037	0.040	0.4592	-0.1147	-0.0727 9.	0.5280	-0.0497	-0.0512	0
1800 2	0.3927	0.094	-0.120	0.272	-0.1489	-0.0568 10.	0.310	0.0000	0.0000	0
1800 3	0.4668	-0.026	-0.071	-0.3878	-0.1248	-0.0878 10.	0.5020	0.0000	0.0000	0
1900 1	-0.0096	-0.109	0.610	0.2456	0.078	-0.0493 6.	0.6160	0.0869	-0.0201	0
1900 2	0.0006	0.290	0.800	0.0837	0.195	-0.0294 9.	0.2430	0.0000	0.0000	0
1900 3	-0.0456	-0.169	-0.030	0.2093	0.117	-0.0577 7.	0.5460	0.1015	-0.0046	0
1930 1	-0.2228	-0.136	0.640	0.2704	-0.0055	-0.0710 6.	0.4080	0.1232	-0.0020	0
1930 2	-0.1972	0.471	-0.040	0.1662	0.0445	-0.0529 7.	0.2550	0.0000	0.0000	0
1930 3	-0.2115	-0.120	-0.020	0.2909	0.0054	-0.0802 7.	0.4030	0.0000	0.0000	0
2000 1	-0.1234	-0.094	0.060	0.1987	-0.0150	-0.0567 5.	0.6320	0.1334	-0.0148	0
2000 2	-0.0941	0.350	-0.070	0.0087	-0.0570	-0.0395 6.	0.2390	0.0000	0.0000	0
2000 3	-0.1100	-0.169	-0.140	0.2564	-0.1174	-0.0667 6.	0.4280	0.0000	0.0000	0
2030 1	0.0942	-0.092	0.410	0.6790	-0.1263	-0.0315 5.	0.6110	0.0969	-0.0376	0
2030 2	0.0829	0.339	0.060	0.5215	-0.1006	-0.0312 6.	0.3330	0.0000	0.0000	0
2030 3	0.0000	0.000	0.000	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0
2100 1	-0.0329	-0.080	0.240	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0
2100 2	-0.1244	0.404	-0.070	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0
2100 3	-0.2092	-0.190	-0.030	0.0000	0.0000	0.0000 0.	0.0000	0.0000	0.0000	0
2230 1	-0.0029	-0.047	0.480	0.0823	-0.0205	-0.0270 2.	0.5	0.609	-0.0011	0
2230 2	-0.15704	0.374	-0.4020	-0.0001	-0.0390	-0.0218 2.	0.70	0.0000	-0.0081	0
2230 3	-0.0981	-0.0219	-0.0310	0.0464	-0.0228	-0.0183 2.	1.3870	0.0000	0.0000	0

42067		TIME SITE	MEAN	USD	VSD	WSD	RUM	RUV	RMV	HORIZ	F	FSD	G	GSD	WIND	WIND
		START	WIND	WIND	ST	DEV	REYNOLDS	STRESSES	CM/SEC	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
		CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....CM/SEC.....
50267	1	104.27	12.38	18.11	4.15	-0.09	.127	0.000	105.81	-0.02	.039	.075	.171	0.000	0.000	0.000
	2	180.35	18.66	28.65	7.88	-0.27	-.343	0.000	182.50	-0.32	.043	-0.02	.159	0.000	0.000	0.000
	3	115.67	12.22	22.80	4.81	-0.11	-.027	0.000	116.90	-0.22	.039	-0.02	.197	0.000	0.000	0.000
	30	110.08	24.58	31.58	8.27	-0.37	-.101	0.000	114.44	-0.02	.081	.026	.279	0.000	0.000	0.000
	30	200.90	25.94	51.41	10.07	-.043	-.718	0.000	207.18	.035	.049	-.046	.251	0.000	0.000	0.000
	30	118.46	20.87	32.16	6.14	-.016	-.209	0.000	120.73	-0.19	.052	-.060	.268	0.000	0.000	0.000
	100	135.61	31.02	24.26	12.09	-.096	-.287	0.000	137.96	0.000	.085	-.236	.196	0.000	0.000	0.000
	100	228.66	41.33	24.82	14.29	-.127	-.107	0.000	229.64	.051	.061	-.337	.114	0.000	0.000	0.000
	100	156.94	28.87	21.86	12.33	-.078	-.225	0.000	154.47	-0.09	.079	-.319	.156	0.000	0.000	0.000
	130	102.48	31.61	19.66	8.13	-.037	-.218	0.000	104.17	-0.04	.069	-.160	.179	0.000	0.000	0.000
	130	189.93	41.76	26.55	9.82	-.051	-.106	0.000	191.43	.045	.049	-.282	.134	0.000	0.000	0.000
	130	118.73	31.90	20.63	10.12	-.055	-.170	0.000	118.36	-0.09	.087	-.227	.180	0.000	0.000	0.000
	230	1	73.78	27.34	19.28	1.61	0.000	0.000	76.51	-0.09	.036	-.158	.301	0.000	0.000	0.000
	230	2	150.50	29.57	26.14	2.94	-.012	.080	0.000	152.94	.037	.020	-.103	.169	0.000	0.000
	230	3	63.51	31.14	21.36	1.96	-.020	-.058	0.000	84.60	-0.03	.072	-.249	.335	0.000	0.000
50267	400	1	104.42	41.09	26.29	9.43	-.057	.500	0.000	107.43	.017	.078	-.001	.240	0.000	0.000
	400	2	167.04	51.26	40.45	16.54	-.150	.888	0.000	171.56	.016	.099	.163	.234	0.000	0.000
	400	3	102.98	44.77	26.14	8.99	-.071	.357	0.000	104.66	-0.03	.085	-.030	.273	0.000	0.000
	430	1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	430	2	137.42	31.34	26.03	6.49	-.019	-.074	0.000	139.63	.046	.057	-.373	.190	0.000	0.000
	430	3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	500	1	93.33	32.04	21.68	8.04	-.050	.180	0.000	95.76	.016	.087	-.305	.234	0.000	0.000
	500	2	153.75	37.60	31.55	14.30	-.110	.448	0.000	156.86	.040	.089	-.234	.209	0.000	0.000
	500	3	107.88	25.64	21.15	8.15	-.028	.226	0.000	108.32	0.000	.079	-.221	.226	0.000	0.000
	700	1	112.83	55.52	43.69	15.34	-.200	.676	0.000	119.87	.017	.159	-.128	.334	0.000	0.000
	700	2	140.27	60.17	53.41	21.14	-.133	.290	0.000	148.54	.023	.145	-.002	.317	0.000	0.000
	700	3	138.30	40.50	57.02	16.27	-.166	-.186	0.000	144.47	.003	.137	-.067	.400	0.000	0.000
	1430	1	197.06	147.94	88.38	23.24	-.434	.195	0.000	210.44	.010	.144	.018	.346	0.000	0.000
	1430	2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	1430	3	188.13	141.87	73.31	20.09	-.264	-2.203	0.000	200.44	.009	.160	.015	.350	0.000	0.000
50267	1530	1	267.63	106.17	82.65	29.37	-.756	2.527	0.000	279.52	.011	.128	.042	.319	0.000	0.000
	1530	2	334.80	119.68	98.91	17.73	-.187	5.742	0.000	351.87	.009	.060	.048	.323	0.000	0.000
	1530	3	271.62	101.65	79.41	24.42	-.433	1.339	0.000	283.21	-0.08	.109	-.030	.269	0.000	0.000
	1600	1	290.65	82.77	87.70	29.57	-.695	.978	0.000	302.72	.007	.105	.091	.283	0.000	0.000
	1600	2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	1600	3	308.84	70.71	66.84	26.13	-.561	-.172	0.000	316.79	-0.10	.087	.024	.210	0.000	0.000
	1630	1	394.64	95.60	83.92	39.87	-1.203	-1.438	0.000	403.24	.006	.105	.065	.209	0.000	0.000
	1630	2	508.92	118.84	89.87	43.57	-1.476	-2.561	0.000	518.16	.016	.091	.081	.183	0.000	0.000
	1630	3	410.72	88.27	77.36	34.25	-.853	-.863	0.000	418.63	-0.14	.086	.004	.181	0.000	0.000

D30A

CORRECTED DATA FOR SITE 3, MAY 2, 1967, Pages D30-D35

TIME SITE	MEAN	USD	VSD	WSD	RW	RUV	RWV	HORIZ	F	FSD	G	GSD
START	WIND	WIND	ST DEV	ST DEV	REYNOLDS	STRESSES	CM/SEC	WIND	ELEV	ANGLE	AZIM	ANGLE
CM/SEC.....			DYNES/CM2.....			CM/SEC	RAD	RAD	RAD	RAD
50267												
1430	3	188.53	142.71	86.16	23.67	-.215	-2.907	0.000	200.44	.011	.188	.017
1530	3	271.64	101.64	93.33	28.76	-.516	1.549	0.000	283.21	-.010	.129	-.036
1600	3	308.88	70.74	78.72	30.83	-.667	-.146	0.000	316.79	-.012	.103	-.028
1630	3	410.78	88.33	91.12	41.17	-1.012	-.775	0.000	418.63	-.017	.102	-.009
1705	3	478.04	101.63	73.00	46.59	-1.582	-.392	0.000	481.29	-.007	.101	-.173
1733	3	333.08	75.51	44.87	30.73	-.743	-1.002	0.000	333.11	-.005	.095	-.291
1800	3	273.05	62.06	37.56	26.32	-.445	-.352	0.000	274.58	-.008	.097	-.145
1830	3	212.27	45.88	34.90	18.97	-.226	-.388	0.000	213.94	-.023	.088	.182
1900	3	186.54	37.75	20.17	15.04	-.152	.004	0.000	186.20	-.029	.079	.266
1930	3	201.85	38.63	28.46	18.40	-.208	.070	0.000	203.20	-.019	.091	-.116
2000	3	205.29	37.89	27.97	19.93	-.273	-.084	0.000	206.50	-.016	.098	-.133
2030	3	211.00	40.42	29.72	20.82	-.294	-.157	0.000	212.14	-.013	.100	-.160
2100	3	192.26	38.80	17.79	16.62	-.135	.193	0.000	189.86	-.001	.080	-.440
2136	3	180.94	35.10	23.03	15.89	-.163	.092	0.000	180.27	-.005	.086	-.356
2200	3	198.64	42.91	28.90	17.79	-.192	-.255	0.000	199.35	-.006	.088	-.237
2230	3	183.71	30.43	27.31	16.61	-.172	.020	0.000	185.30	-.012	.091	-.061
2305	3	166.17	35.72	23.28	15.61	-.154	-.281	0.000	167.36	-.010	.093	-.090
2330	3	160.92	48.60	24.48	14.63	-.119	-.528	0.000	161.93	-.029	.082	.172

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW
START	RAD	RAD	RAD	SENSIBLE	HEAT	TRANS	MEAN ST DEV	LATENT	HEAT	TRANS
			CAL/(CM2-MIN)....			CENTIGRADECAL/(CM2-MIN)....		
50267										
1430	3	-.1226	-.0115	-.0150	.5517	-.3757	.0209	20.	.5150	0.0000
1530	3	-.0100	-.0204	-.0310	-.0175	-.2056	.0422	20.	.3820	0.0000
1600	3	.0258	-.0195	-.0320	-.0737	-.0139	.0170	20.	.1670	0.0000
1630	3	.0007	-.0231	-.0430	-.0824	.0246	-.0133	19.	.2480	0.0000
1705	3	-.1802	-.0140	-.0090	.1850	.0076	-.0444	18.	.1560	0.0000
1733	3	-.2987	-.0110	-.0520	.4301	-.1163	-.0594	18.	.4750	0.0000
1800	3	-.1500	-.0142	.0130	.5410	-.0672	-.0561	16.	.6640	0.0000
1830	3	.1810	-.0272	-.0240	.4629	-.1486	-.0374	13.	.9840	0.0000
1900	3	.2662	-.0329	-.0520	.0244	-.0024	-.0230	11.	.5270	0.0000
1930	3	-.1146	-.0230	-.0330	.1257	.0007	-.0330	9.	.4090	0.0000
2000	3	-.1347	-.0219	-.0190	.1341	.0117	-.0342	9.	.3650	0.0000
2030	3	-.1636	-.0194	-.0200	.1919	-.0246	-.0362	8.	.3590	0.0000
2100	3	-.4340	-.0063	-.4290	.1668	.0161	-.0231	8.	.3200	0.0000
2136	3	-.3518	-.0093	-.0650	.1183	-.0265	-.0237	8.	.3000	0.0000
2200	3	-.2431	-.0124	-.0300	.1800	-.0063	-.0236	7.	.3240	0.0000
2230	3	-.0612	-.0173	-.0050	.0869	-.0317	-.0233	7.	.3010	0.0000
2305	3	-.1003	-.0151	-.0180	.1138	-.0237	-.0225	7.	.2970	0.0000
2330	3	.1557	-.0320	0.0000	.2535	-.0627	-.0159	6.	.3770	0.0000

42867

TIME SITE START	ETA		THETA		BETA		HJ SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEVCAL/(CM2-MIN).....	AIR TEMPF.....	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED VSO F PARTS PER THOUSAND	
	RAD	DEG	RAD	DEG	RAD	DEG								
1	0.0848	-0.031	0.0290				0.0596	0.0876	-0.0025	2.0	0.349	0.0337	0	0
2	-0.0114	0.329	-0.0580				0.0400	0.0280	-0.0033	2.0	0.0000	0.0000	0	0
3	-0.0300	-0.034	-0.0210				0.0348	0.0269	-0.0039	2.0	0.0000	0.0000	0	0
30 1	0.0250	-0.044	0.120				0.0860	0.0693	-0.0101	1.0	0.0030	0.0000	0	0
30 2	-0.0578	0.361	-0.0510				0.0505	0.0407	-0.0073	2.0	0.0000	0.0000	0	0
30 3	-0.0696	-0.020	-0.0360				0.0722	-0.1035	-0.0042	1.0	0.0000	0.0000	0	0
100 1	-0.2507	-0.044	0.0240				0.1134	0.0340	-0.0204	1.0	0.0000	0.0000	0	0
100 2	-0.3412	0.050	-0.0500				0.1142	0.0865	-0.0129	2.0	0.0000	0.0000	0	0
100 3	-0.3216	-0.012	-0.0010				0.1085	-0.0472	-0.0211	2.0	0.0000	0.0000	0	0
130 1	-0.1730	-0.069	0.0310				0.0591	-0.0206	-0.0091	1.0	0.0000	0.0000	0	0
130 2	-0.2777	0.044	-0.0470				0.0520	0.0034	-0.0066	2.0	0.0000	0.0000	0	0
130 3	-0.2335	-0.017	-0.0260				0.0634	-0.0505	-0.0006	1.0	0.0000	0.0000	0	0
230 1	-0.1647	-0.086	0.0150				0.0671	-0.0738	-0.0058	1.0	0.0000	0.0000	0	0
230 2	-0.0975	0.360	-0.0550				0.0399	0.0701	-0.0003	2.0	0.0000	0.0000	0	0
230 3	-0.2049	-0.016	-0.0280				0.1035	-0.0083	-0.0023	1.0	0.0000	0.0000	0	0
400 1	0.0429	0.149	0.0050				-0.0499	-0.0085	-0.0094	0.0	0.0000	0.0000	0	0
400 2	0.1865	0.115	-0.0670				0.0328	0.0914	-0.0150	0.0	0.0000	0.0000	0	0
400 3	0.0314	-0.014	-0.0310				-0.0301	0.0317	-0.0095	0.0	0.0000	0.0000	0	0
430 1	0.0000	0.000	0.0000				0.0000	0.0000	0.0000	0.0	0.0000	0.0000	0	0
430 2	-0.3717	0.467	-0.0380				0.0203	-0.0146	-0.0009	0.0	0.0000	0.0000	0	0
430 3	0.0000	0.000	0.0000				0.0000	0.0000	0.0000	0.0	0.0000	0.0000	0	0
500 1	-0.2752	0.124	0.0280				0.0158	-0.0388	-0.0102	0.0	0.0000	0.0000	0	0
500 2	-0.2152	0.387	0.0030				0.0306	-0.0245	-0.0089	0.0	0.0000	0.0000	0	0
500 3	-0.1927	-0.047	-0.0330				-0.0271	-0.0684	-0.0100	0.0	0.0000	0.0000	0	0
700 1	-0.0960	0.026	0.0030				-0.4100	-0.0005	0.0579	5.0	-0.2126	-0.0685	0	0
700 2	0.0045	0.020	-0.0490				0.0779	-0.1799	0.0586	4.0	0.0000	0.0000	0	0
700 3	-0.0706	-0.006	-0.0270				-0.0353	-0.1347	0.0493	5.0	0.0000	0.0000	0	0
50267														
1430 1	-0.0043	0.029	0.0210				-0.3438	-0.6068	0.0714	20.0	0.5320	-0.5140	0	0
1430 2	0.0000	0.000	0.0000				0.0000	0.0000	0.0000	0.0	0.0000	0.0000	0	0
1430 3	-0.1042	-0.034	-0.0150				0.5376	-0.3196	0.0177	20.0	0.5150	0.0000	0	0
1530 1	0.0979	0.022	0.0240				-0.4249	-0.0257	0.0403	20.0	0.2540	-0.3104	0	0
1530 2	0.1132	0.084	-0.0290				-0.2885	-0.0644	0.0295	20.0	0.2390	0.0000	0	0
1530 3	-0.0084	-0.017	-0.0310				-0.0178	-0.1745	0.0358	20.0	0.3820	0.0000	0	0
1600 1	0.0062	0.009	0.0200				-0.1339	0.0423	0.0164	20.0	0.2940	-0.6413	0	0
1600 2	0.0000	0.000	0.0000				0.0000	0.0000	0.0000	0.0	0.0000	0.0000	0	0
1600 3	0.0219	-0.016	-0.0320				-0.0735	-0.0118	0.0144	20.0	0.1670	0.0000	0	0
1630 1	0.0582	-0.007	0.0300				-0.0884	0.0811	-0.0190	19.0	0.3170	-0.5724	0	0
1630 2	0.0741	0.014	-0.0590				-0.1707	0.0279	-0.0021	19.0	0.1660	0.0000	0	0
1630 3	0.0006	-0.019	-0.0430				-0.0825	0.0208	-0.0113	19.0	0.2480	0.0000	0	0

TIME SITE	MEAN	USD	VSD	WSD	RUM	RUV	HORIZ	F	FSD	S	GSD	WIND	WIND
START	WIND	WIND	WIND	WIND	REYNOLDS	STRESSES	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
	CM/SEC	CM/SEC	CM/SEC	CM/SEC	DYNES/CM2	RAD	RAD	RAD	RAD	RAD	RAD
50267													
1705 1	451.49	106.91	23.12	43.10	-1.498	1.857	0.000	458.68	0.000	100	-129	177	0.000
1705 2	605.23	101.76	97.09	49.65	-1.991	1.300	0.000	614.26	0.000	084	-127	157	0.000
1705 3	475.88	101.07	62.26	39.55	-1.327	-0.056	0.000	481.29	-0.006	086	-151	130	0.000
1735 1	329.45	73.97	46.29	30.97	-0.680	-0.744	0.000	332.54	-0.002	097	-243	142	0.000
1735 2	419.78	67.77	58.83	34.86	-0.929	-0.891	0.000	425.56	0.030	084	-236	137	0.000
1735 3	329.02	73.74	38.56	26.09	-0.615	-0.683	0.000	333.11	-0.004	082	-247	117	0.000
1800 1	250.96	62.11	40.97	25.73	-0.429	-0.183	0.000	254.18	0.004	103	-090	163	0.000
1800 2	351.83	57.74	43.09	25.69	-0.404	-0.404	0.000	354.84	0.035	071	-088	121	0.000
1800 3	272.19	61.58	31.99	22.34	-0.374	-0.238	0.000	274.58	-0.001	082	-123	116	0.000
1830 1	206.65	52.31	35.06	20.59	-0.272	-0.498	0.000	209.33	0.000	098	-256	161	0.000
1830 2	292.00	51.22	44.77	22.03	-0.291	-0.373	0.000	296.97	0.000	073	-267	150	0.000
1830 3	211.28	46.01	29.77	16.11	-0.189	-0.393	0.000	213.94	-0.019	075	-159	139	0.000
1900 1	180.07	37.86	20.47	16.18	-0.151	-0.009	0.000	181.07	0.010	089	-321	110	0.000
1900 2	268.23	33.81	23.36	17.67	-0.140	-0.060	0.000	271.14	0.002	063	-329	083	0.000
1900 3	184.71	37.33	17.29	12.77	-0.127	-0.026	0.000	186.20	-0.025	067	-226	069	0.000
1930 1	192.72	40.41	28.32	19.02	-0.239	-0.017	0.000	194.74	0.004	099	-182	146	0.000
1930 2	280.76	37.75	31.72	21.30	-0.237	-0.058	0.000	282.88	0.021	075	-058	112	0.000
1930 3	201.47	36.58	24.29	15.62	-0.173	-0.086	0.000	203.20	-0.016	077	-058	118	0.000
2000 1	201.11	41.46	30.30	20.98	-0.298	-0.109	0.000	203.32	0.005	107	-117	151	0.000
2000 2	286.22	40.03	31.48	23.06	-0.276	-0.130	0.000	288.28	0.026	020	-105	109	0.000
2000 3	204.76	37.70	23.80	16.92	-0.228	-0.041	0.000	206.50	-0.013	083	-113	115	0.000
2030 1	194.38	42.08	29.25	19.79	-0.256	-0.098	0.000	196.47	0.004	105	-174	149	0.000
2030 2	285.68	41.11	31.57	23.05	-0.239	-0.261	0.000	297.89	0.029	080	-144	109	0.000
2030 3	210.20	40.11	25.32	17.68	-0.246	-0.092	0.000	212.19	-0.011	085	-130	118	0.000
2100 1	165.32	42.84	18.32	16.06	-0.087	-0.485	0.000	166.11	-0.001	101	-545	108	0.000
2100 2	258.21	33.00	19.51	17.23	-0.153	-0.002	0.000	261.52	0.041	063	-421	070	0.000
2100 3	187.45	38.17	14.85	13.65	-0.111	-0.176	0.000	189.86	-0.001	068	-373	070	0.000
2136 1	155.69	38.74	19.67	15.01	-0.146	-0.323	0.000	156.79	0.005	100	-375	126	0.000
2136 2	253.12	32.81	32.18	17.78	-0.188	-0.079	0.000	256.48	0.038	067	-285	123	0.000
2136 3	177.91	34.73	19.87	13.49	-0.134	-0.129	0.000	180.27	-0.004	073	-302	105	0.000
2200 1	185.77	45.00	34.49	18.84	-0.272	-0.068	0.000	188.91	0.005	104	-126	186	0.000
2200 2	276.39	45.26	40.60	20.41	-0.254	-0.256	0.000	279.70	0.025	073	-011	148	0.000
2200 3	197.03	42.27	24.74	15.10	-0.161	-0.159	0.000	199.35	-0.007	074	-201	122	0.000
2230 1	167.54	31.20	25.22	16.65	-0.201	-0.026	0.000	169.43	0.004	102	-122	153	0.000
2230 2	258.87	30.10	28.88	17.71	-0.177	-0.086	0.000	260.62	0.020	068	-013	110	0.000
2230 3	183.61	30.41	23.20	14.10	-0.145	-0.030	0.000	185.30	-0.010	077	-052	126	0.000
2305 1	134.98	46.27	24.50	14.11	-0.138	-0.636	0.000	137.26	0.008	103	-048	197	0.000
2305 2	228.17	43.37	25.47	16.51	-0.160	-0.522	0.000	229.79	0.024	073	-024	118	0.000
2305 3	165.93	33.47	19.80	13.25	-0.132	-0.223	0.000	167.36	-0.008	079	-077	121	0.000

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV MEAN TRANS	HW CENTIGRADE	AIR TEMP ST DEV	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV MEAN TRANS	EM LATENT HEAT TRANS	LIMITS EXCEEDED	
											VSO F	G PARTS PER THOUSAND
50267												
1705 1	-1218	-0075	0040	2710	0819	-0499	18	3050	-4030	0534	0	0
1705 2	-1253	0222	-0400	155	0473	-0448	18	1890	0.0000	0.0000	0	0
1705 3	-1534	-0119	-0080	1843	0064	-0377	18	1560	0.0000	0.0000	0	0
1735 1	-2550	-0070	0280	4034	-1130	-0651	17	4870	-2328	0118	0	0
1735 2	-2426	0324	-0490	2270	-1401	-0634	18	2990	0.0000	0.0000	0	0
1735 3	-2557	-0094	-0490	4152	-1001	-0503	18	4750	0.0000	0.0000	0	0
1800 1	-0941	-0014	0320	565	-0497	-0580	16	7120	-0919	0439	0	0
1800 2	-0919	0224	-0150	3212	-0488	-0469	17	4410	0.0000	0.0000	0	0
1800 3	-1276	-0121	0140	5363	-0573	-0476	16	6540	0.0000	0.0000	0	0
1830 1	2496	0037	0170	5017	-1380	-0363	13	8570	2014	-0231	0	0
1830 2	2611	0063	-0360	3263	-1434	-0254	15	7170	0.0000	0.0000	0	0
1830 3	1541	-0237	-0260	4680	-1267	-0318	13	9840	0.0000	0.0000	0	0
1900 1	3340	0064	0860	0327	-0033	-0400	11	5780	0.0000	0.0000	0	0
1900 2	3332	0213	-0130	-1091	-0474	-0233	13	5790	0.0000	0.0000	0	0
1900 3	2275	-0287	-0560	0243	-0020	-0195	11	5290	0.0000	0.0000	0	0
1930 1	-1425	-0008	0530	1526	-0225	-0395	9	4670	0.0000	0.0000	0	0
1930 2	-0962	0197	-0500	0489	-0118	-0310	11	3520	0.0000	0.0000	0	0
1930 3	-0974	-0203	-0290	1253	0006	-0280	9	4090	0.0000	0.0000	0	0
2000 1	-1602	-0015	0590	1477	0080	-0390	9	3580	0.0000	0.0000	0	0
2000 2	-1088	0239	0010	0716	-0137	-0316	10	2680	0.0000	0.0000	0	0
2000 3	-1145	-0186	-0180	1339	0099	-0291	9	3650	0.0000	0.0000	0	0
2030 1	-1768	-0014	0460	1934	-0139	-0359	8	4010	0.0000	0.0000	0	0
2030 2	-1483	0267	0640	1363	-0265	-0263	10	3130	0.0000	0.0000	0	0
2030 3	-1393	-0167	-0180	1896	-0211	-0307	8	3590	0.0000	0.0000	0	0
2100 1	-4332	-0081	-2280	2255	0422	-0196	8	4470	0.0000	0.0000	0	0
2100 2	-4261	0404	2050	0666	-0093	-0190	10	2690	0.0000	0.0000	0	0
2100 3	-3748	-0054	-3350	1631	0114	-0200	8	3200	0.0000	0.0000	0	0
2136 1	-3650	0007	-0550	1811	0214	-0221	7	3960	1349	0118	-0257	0
2136 2	-2886	0369	-0710	0226	-0421	-0191	9	2750	0.0000	0.0000	0	0
2136 3	-3021	-0080	-0110	1137	-0230	-0201	8	3000	0.0000	0.0000	0	0
2200 1	-1252	-0008	0050	1898	0444	-0319	7	4020	1629	0325	-0336	0
22200 2	0075	0230	-0410	1086	0640	-0251	9	3090	0.0000	0.0000	0	0
22200 3	-2075	-0100	-0280	1780	-0095	-0200	7	3280	0.0000	0.0000	0	0
2230 1	-1214	-0018	0210	0923	-0084	-0285	7	2930	0.0000	0.0000	0	0
2230 2	0144	0187	-0380	0529	0011	-0175	8	2080	0.0000	0.0000	0	0
2230 3	-0520	-0147	-0050	0862	-0269	-0197	7	3010	0.0000	0.0000	0	0
2305 1	-0831	0007	0460	2318	-0648	-0224	6	3860	1768	-0438	-0234	0
2305 2	0145	0223	-0270	1102	-0263	-0179	8	2730	0.0000	0.0000	0	0
2305 3	-0852	-0129	-0170	1129	-0201	-0151	7	2970	0.0000	0.0000	0	0

TIME SITE	MEAN	USD	VSD	WSD	RUV	RUV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	WIND	ST	DEV	REYNOLDS	STRESSES	WIND	ELEV	ANGLE	ANGLE	ANGLE	DIR	SHIFT
		CM/SEC				DYNES/CM2	CM/SEC	RAD	RAD	RAD	RAD	RAD	RAD
50267													
2330 1	171.43	42.74	31.03	17.80	-188	-371	0.000 174.06	.012	.102	.123	.174	0.000	0.000
2330 2	254.72	44.21	32.44	18.69	-188	-543	0.000 257.88	.011	.070	.244	.124	0.000	0.000
2330 3	160.35	48.79	20.85	12.42	-099	-475	0.000 161.93	-.024	.069	.146	.122	0.000	0.000
50367													
1130 1	201.89	39.19	36.62	21.27	-302	-060	0.000 205.15	.009	.108	.089	.181	0.000	0.000
1130 2	292.61	38.20	39.05	22.47	-279	-154	0.000 296.41	.013	.077	.216	.134	0.000	0.000
1130 3	189.34	37.79	33.99	18.59	-221	.251	0.000 191.68	-.017	.098	.102	.185	0.000	0.000
1230 1	106.66	88.74	44.51	18.40	-134	-305	0.000 113.35	.001	.231	-.160	.379	0.000	0.000
1230 2	134.55	91.87	54.48	26.53	.068	-2.059	0.000 145.70	.002	.230	-.111	.389	0.000	0.000
1230 3	110.33	89.59	42.65	19.10	-202	-.910	0.000 115.28	.015	.209	-.174	.374	0.000	0.000
1330 1	210.72	122.18	68.41	23.57	-.415	1.666	0.000 219.82	.008	.144	.173	.312	0.000	0.000
1330 2	249.29	127.89	85.65	33.90	-.481	2.148	0.000 263.86	.007	.168	.213	.315	0.000	0.000
1330 3	220.58	106.64	70.10	27.59	-.602	.648	0.000 226.94	-.013	.159	.274	.296	0.000	0.000
1400 1	273.55	105.74	43.24	25.26	-.519	-.666	0.000 276.14	.013	.098	.354	.159	0.000	0.000
1400 2	329.50	104.24	59.67	36.67	-.706	-2.279	0.000 337.81	.007	.125	.395	.166	0.000	0.000
1400 3	272.74	98.86	49.53	28.29	-.694	-1.301	0.000 273.36	-.015	.128	.370	.186	0.000	0.000
1500 1	224.96	102.04	71.03	25.02	-.260	2.557	0.000 235.52	-.002	.137	.089	.331	0.000	0.000
1500 2	270.67	118.17	84.56	33.74	-.090	3.365	0.000 284.72	0.000	.163	.102	.312	0.000	0.000
1500 3	238.23	106.37	75.93	26.30	-.543	3.336	0.000 247.39	-.008	.154	.082	.343	0.000	0.000
1600 1	187.21	81.11	62.69	19.36	-.272	1.455	0.000 196.27	.005	.127	.070	.314	0.000	0.000
1600 2	219.99	86.28	30.53	27.21	-.313	.332	0.000 235.16	.008	.144	.119	.344	0.000	0.000
1600 3	185.98	88.14	65.60	20.83	-.378	.007	0.000 194.40	-.002	.145	.115	.345	0.000	0.000
1700 1	201.83	84.40	43.33	22.34	-.196	.197	0.000 206.01	.006	.142	.298	.218	0.000	0.000
1700 2	225.35	98.79	54.07	32.57	-.387	-.549	0.000 233.27	.005	.186	.328	.231	0.000	0.000
1700 3	180.83	100.05	52.51	23.87	-.540	.050	0.000 185.24	.001	.166	.263	.295	0.000	0.000
1800 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000	0.000	0.000	0.000	0.000	0.000
1800 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000	0.000	0.000	0.000	0.000	0.000
1800 3	164.33	85.64	39.55	16.99	-.445	.111	0.000 158.48	.032	.193	.284	.244	0.000	0.000
1900 1	281.82	67.48	72.00	28.68	-.503	1.097	0.000 290.85	.004	.105	.145	.257	0.000	0.000
1900 2	351.02	75.15	85.02	32.95	-.712	.984	0.000 363.24	.015	.097	.149	.246	0.000	0.000
1900 3	284.20	69.89	70.10	29.08	-.606	.925	0.000 290.77	-.015	.106	.134	.251	0.000	0.000
2000 1	293.50	71.57	56.68	29.70	-.744	.258	0.000 298.79	.005	.106	.030	.191	0.000	0.000
2000 2	361.97	62.31	65.79	33.90	-.648	.302	0.000 388.32	.014	.090	.027	.171	0.000	0.000
2000 3	294.28	63.67	56.46	29.83	-.669	-.308	0.000 298.59	-.014	.105	0.000	.189	0.000	0.000
2100 1	255.60	60.96	44.70	26.40	-.515	-.295	0.000 259.27	.008	.106	-.060	.168	0.000	0.000
2100 2	353.93	66.98	46.91	30.28	-.592	-.375	0.000 357.35	.023	.086	-.062	.129	0.000	0.000
2100 3	275.93	68.53	42.98	27.98	-.584	.046	0.000 278.40	-.013	.103	-.065	.151	0.000	0.000
2200 1	227.09	61.31	33.96	23.20	-.399	.127	0.000 229.47	.006	.103	-.043	.145	0.000	0.000
2200 2	318.68	57.89	37.54	26.35	-.385	.095	0.000 321.00	.023	.080	-.059	.110	0.000	0.000
2200 3	244.21	58.77	33.01	23.75	-.422	-.089	0.000 245.80	-.014	.098	-.068	.130	0.000	0.000

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	AIR TEMP	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED			
										VSQ	F	G	
50267													
2330 1	.1139	.0067	.0550	.1472	-.0391	-.0276	6.	.3200	.1482	-.0397	-.0278	0	0
2330 2	.2390	.0094	-.0280	.0239	.0074	-.0202	7.	.2400	0.0000	0.0000	0.0000	0	0
2330 3	.1325	-.0280	-.0010	.2551	-.0534	-.0135	6.	.3770	0.0000	0.0000	0.0000	0	0
50367													
1	.0893	.0026	.0210	.0921	-.0147	-.0305	6.	.2920	.0940	-.0166	-.0307	0	0
2	.2164	.0104	-.0340	.0462	-.0227	-.0270	7.	.2520	0.0000	0.0000	0.0000	0	0
3	.1088	-.0234	-.0480	.0507	.0107	-.0244	6.	.2630	0.0000	0.0000	0.0000	0	0
1130 1	-.2460	-.0122	.0410	-.0552	.2701	.0380	17.	.8980	0.0000	0.0000	0.0000	0	0
1130 2	-.2241	.0178	-.0590	-.8854	-.0601	.1526	17.	.5960	0.0000	0.0000	0.0000	0	0
1130 3	-.2852	-.0005	-.0860	.5758	-.1126	.1674	10.	.9120	0.0000	0.0000	0.0000	0	0
1230 1	.2231	-.0017	.0400	-.9307	-.1511	.1497	19.	.7440	.4387	.3076	.4130	0	0
1230 2	.2500	-.0013	-.0650	.0274	.0725	.1251	19.	.4090	0.0000	0.0000	0.0000	0	0
1230 3	.2664	-.0285	-.0500	.1150	-.0133	.1319	20.	.6930	0.0000	0.0000	0.0000	0	0
1306 1	.3674	.0065	.0040	-1.3098	-.0792	.1354	20.	.7560	-.5082	-.1663	.4597	0	0
1306 2	.3906	.0014	-.0120	-.3267	.0833	.1652	19.	.5680	0.0000	0.0000	0.0000	0	0
1306 3	.3567	-.0234	-.0290	-.1826	.0271	.1296	20.	.6670	0.0000	0.0000	0.0000	0	0
1330 1	.1464	-.0009	.0340	-.0764	.1047	.1159	20.	.6860	.8999	.6906	.4339	0	0
1330 2	.1542	-.0046	-.0550	-.1007	.0501	.1192	19.	.4670	0.0000	0.0000	0.0000	0	0
1330 3	.1463	-.0240	-.0410	-.0509	-.0010	.1292	20.	.6430	0.0000	0.0000	0.0000	0	0
1400 1	.1080	-.0005	.0230	-.0925	.2616	.0221	19.	.5560	-.1617	-.3645	.2292	0	0
1400 2	.1194	.0024	-.0800	-.0130	.2659	.0466	19.	.3400	0.0000	0.0000	0.0000	0	0
1400 3	.1065	-.0175	-.0210	.1310	.2810	.0481	20.	.5490	0.0000	0.0000	0.0000	0	0
1430 1	.3039	.0037	.0120	-.5066	-.0119	.0909	20.	.7520	.3888	.0006	.4332	0	0
1430 2	.3338	.0034	-.0550	-.5038	.0419	.1084	20.	.5390	0.0000	0.0000	0.0000	0	0
1430 3	.2808	-.0164	-.0190	.1930	.0337	.1542	20.	.7220	0.0000	0.0000	0.0000	0	0
1600 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0	0
1600 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0.0000	0	0
1600 3	.2611	-.0152	-.0152	-.2637	.0374	.0164	20.	.4340	0.0000	0.0000	0.0000	0	0
1630 1	.1574	-.0012	.0250	.0453	.1628	-.0127	19.	.3120	-.6176	-.4283	.1704	0	0
1630 2	.1558	.0111	-.0400	.0207	.1528	.0005	19.	.1980	0.0000	0.0000	0.0000	0	0
1630 3	.1434	-.0231	-.0380	.0511	.1101	-.0083	19.	.1890	0.0000	0.0000	0.0000	0	0
1700 1	.0329	-.0021	.0100	.1231	.0674	-.0470	18.	.3440	-1.0475	-2.4206	.1771	0	0
1700 2	.0290	.0107	-.0500	.0172	.1124	-.0294	19.	.3150	0.0000	0.0000	0.0000	0	0
1700 3	-.0036	-.0215	-.0220	.1342	.0764	-.0418	19.	.3450	0.0000	0.0000	0.0000	0	0
1730 1	-.0645	.0019	.0280	.3341	-.0297	-.0585	17.	.4910	1.2322	-.7349	-.0116	0	0
1730 2	-.0659	.0195	-.0530	.2770	-.0204	-.0515	18.	.3670	0.0000	0.0000	0.0000	0	0
1730 3	-.0651	-.0207	-.0050	.4185	.0001	-.0518	17.	.4820	0.0000	0.0000	0.0000	0	0
1800 1	-.0415	.0001	.0180	.5312	.0148	-.0523	15.	.6450	-.1814	.0064	-.0317	0	0
1800 2	-.0593	.0205	-.0790	.3337	.0152	-.0396	16.	.4710	0.0000	0.0000	0.0000	0	0
1800 3	-.0704	-.0203	-.0220	.4858	-.0171	-.0541	16.	.6190	0.0000	0.0000	0.0000	0	0

TIME	SITE	MEAN	USD	WSD	RUM	RUV	RWV	HORIZ	F	FSD	G	USD	WIND	WIND
START		WIND	CM/SEC.	ST DEV	REYNOLDS STRESSES	DYNES/CM2		WIND	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
								CM/SEC	RAD	RAD	RAD	RAD	RAD	RAD
50367														
1830	1	232.62	50.64	36.04	23.20	-361	0.034	0.000	235.25	.004	.100	.018	.149	0.000
1840	2	0.00	0.00	0.00	0.00	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1830	3	242.39	50.86	35.13	23.61	-374	.014	0.000	244.40	-.014	.098	.001	.143	0.000
1900	1	222.40	46.10	36.68	23.01	-353	.034	0.000	225.29	.006	.105	-.080	.160	0.000
1900	2	0.00	0.00	0.00	0.00	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1900	3	234.58	47.74	35.86	23.10	-379	-.480	0.000	236.40	-.010	-.107	.151	0.000	0.000
2000	1	253.79	62.74	37.74	26.48	-539	-.047	0.000	256.50	.003	.108	-.131	.149	0.000
2000	2	345.42	63.34	42.72	29.66	-512	-.116	0.000	348.14	.035	.083	.007	.121	0.000
2000	3	261.18	64.57	38.22	26.40	-529	-.062	0.000	263.16	-.016	.103	-.089	.144	0.000
2035	1	297.65	70.41	45.00	30.38	-776	.484	0.000	300.87	.005	.108	-.225	.149	0.000
2035	2	386.51	64.14	54.65	34.16	-770	.932	0.000	390.81	.043	.088	-.122	.138	0.000
2035	3	325.33	65.19	49.43	32.47	-739	.181	0.000	327.47	-.011	.103	-.178	.150	0.000
2100	1	250.07	7	36.82	26.31	-518	-.111	0.000	252.65	.005	.111	-.210	.147	0.000
2100	2	330.57	41.87	29.34	34.16	-485	-.237	0.000	333.52	.048	.090	-.125	0.000	0.000
2100	3	263.97	39.08	26.48	26.48	-452	-.259	0.000	265.57	-.012	.103	-.176	.148	0.000
2130	1	267.07	70.02	40.04	27.09	-516	-.464	0.000	269.86	-.002	.106	-.227	.149	0.000
2130	2	349.27	74.02	45.19	31.75	-610	-.438	0.000	352.63	.040	.092	-.122	.129	0.000
2130	3	277.74	68.75	44.87	28.85	-638	-.741	0.000	279.83	-.011	.107	-.180	.160	0.000
2200	1	315.97	72.74	38.90	31.54	-798	.104	0.000	318.15	.000	.106	-.310	.123	0.000
2200	2	0.00	0.00	0.00	0.00	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
2200	3	329.33	72.21	45.76	32.85	-750	.029	0.000	329.65	-.007	.104	-.286	.139	0.000
2300	1	185.17	35.97	28.04	18.58	-236	.048	0.000	187.21	0.000	.102	-.086	.148	0.000
2300	2	271.94	37.25	29.78	21.38	-282	.037	0.000	273.87	.030	.078	-.115	.109	0.000
2300	3	211.14	36.29	27.88	25.15	-283	-.012	0.000	212.29	-.011	.098	-.136	.132	0.000
2330	1	180.54	35.17	25.72	18.81	-227	-.028	0.000	182.30	.004	.105	.146	.141	0.000
2330	2	252.43	32.40	26.42	19.64	-257	-.061	0.000	254.11	.023	.078	.116	.103	0.000
2330	3	185.39	36.31	24.90	17.78	-219	-.132	0.000	186.64	-.021	.097	.053	.132	0.000
50467														
1	185.82	43.57	23.70	19.23	-230	0.000	.004	187.15	-.006	.105	.332	.125	0.000	0.000
2	247.73	45.01	25.69	21.36	-277	0.000	-.003	250.85	-.019	.085	.331	.134	0.000	0.000
3	175.97	39.72	23.36	18.46	-203	0.000	-.009	175.76	-.019	.106	.297	.104	0.000	0.000
30	186.22	46.94	41.11	21.38	-348	-.403	0.000	190.88	.012	.121	-.042	.237	0.000	0.000
30	249.44	51.83	45.91	25.67	-315	-.799	0.000	254.59	.031	.103	.155	.194	0.000	0.000
30	182.39	48.46	38.48	19.57	-233	-.688	0.000	185.97	-.015	.116	-.115	.243	0.000	0.000
100	152.96	54.70	50.60	18.04	-249	0.000	0.000	160.96	.017	.117	-.031	.327	0.000	0.000
100	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
100	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1200	1	257.28	99.81	54.24	29.85	-754	1.539	0.000	269.68	.010	.140	.089	.324	0.000
1200	2	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1200	3	274.59	104.30	76.94	29.84	-705	.532	0.000	281.37	-.020	.135	.254	.275	0.000

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	AIR TEMP CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV HEAT TRANSCAL/(CM2-MIN).....	EW HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED VSO F G PARTS PER THOUSAND
50367											
1830 1	.0193	-.0004	-.0290	.1265	-.0423	-.0553	13.6770	.1065	-.0480	-.0528	0 0 0
1830 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1830 3	.0011	-.0204	-.0650	.0749	.0785	-.0430	14.5950	0.0000	0.0000	0.0000	0 0 0
1900 1	-.0804	0.0000	0.0000	.2081	-.0276	-.0483	12.5100	.1689	-.0350	-.0499	0 0 0
1900 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1900 3	-.1135	-.0165	-.0400	.2391	-.0021	-.0441	12.5160	0.0000	0.0000	0.0000	0 0 0
2000 1	-.1321	-.0040	-.0370	.1764	-.0026	-.0404	10.3270	.0178	-.0167	-.0374	0 0 0
2000 2	.0059	-.0329	-.0340	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2000 3	-.0910	-.0724	-.0550	.2006	.0055	-.0340	10.2600	0.0000	0.0000	0.0000	0 0 0
2035 1	-.2203	-.0028	-.0370	.2840	-.0426	-.0476	9.3300	.5294	.1405	-.0442	0 0 0
2035 2	-.1188	.0391	-.0690	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2035 3	-.1765	-.0183	-.0220	.2085	.0241	-.0376	10.2680	0.0000	0.0000	0.0000	0 0 0
2100 1	-.2122	-.0023	-.0700	.2113	-.0254	-.0378	9.3500	.1156	-.0054	-.0376	0 0 0
2100 2	-.1283	-.0467	-.0050	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2100 3	-.1797	-.0181	-.0210	.2021	-.0349	-.0315	9.3500	0.0000	0.0000	0.0000	0 0 0
2130 1	-.2343	-.0093	-.0150	.1521	-.0144	-.0362	8.2820	.0780	.0108	-.0358	0 0 0
2130 2	-.1273	-.0373	-.0150	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2130 3	-.1886	-.0173	-.0100	.1951	-.0118	-.0295	9.2490	0.0000	0.0000	0.0000	0 0 0
2200 1	-.3113	-.0072	-.0410	.2003	.0015	-.0393	8.2720	.1330	.0167	-.0343	0 0 0
2200 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2200 3	-.2862	-.0130	-.0570	.2018	.0071	-.0337	9.1950	0.0000	0.0000	0.0000	0 0 0
2300 1	-.0854	-.0054	-.0370	.1032	.0052	-.0234	8.2970	.0670	.0037	-.0223	0 0 0
2300 2	-.1164	.0277	-.1050	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2300 3	-.1373	-.0173	-.0220	.0851	-.0017	-.0208	8.1490	0.0000	0.0000	0.0000	0 0 0
2330 1	.1471	-.0015	-.0420	.0925	.0003	-.0213	8.2500	.0771	-.0054	-.0213	0 0 0
2330 2	.1162	.0203	.0330	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
2330 3	.0511	-.0271	-.0150	.1047	-.0128	-.0196	8.2270	0.0000	0.0000	0.0000	0 0 0
50467											
1	.3350	.0007	.0200	.1149	-.0022	-.0200	7.2150	.0711	.0019	-.0210	0 0 0
2	.3366	.0117	-.0150	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
3	.2920	-.0254	-.0315	.0973	-.0115	-.0154	8.2310	0.0000	0.0000	0.0000	0 0 0
30 1	-.0552	.0029	.0270	.0888	.0298	-.0283	7.2580	.0911	.0031	-.0283	0 0 0
30 2	.1442	.0290	-.0670	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
30 3	-.1375	-.0203	-.0260	.0917	.0407	-.0201	8.2100	0.0000	0.0000	0.0000	0 0 0
100 1	-.0440	.0106	.0010	.2324	.1036	-.0568	7.2960	.1276	-.0835	-.0254	0 0 0
100 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
100 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1200 1	.1222	.0030	.0240	-.1772	-.1098	.1812	18.8770	0.0000	0.0000	0.0000	0 0 0
1200 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1200 3	.2486	-.0272	-.0250	-.1789	.0622	.1494	20.7930	0.0000	0.0000	0.0000	0 0 0

TIME SITE START	MEAN WIND	USD WIND ST DEV	VSD WIND ST DEV	RUM REYNOLDS STRESSES	RUV REYNOLDS STRESSES	RHW REYNOLDS STRESSES	HORIZ WIND CM/SEC	F ELEV ANGLE RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD	WIND DIR RAD	WIND SHIFT RAD
50467													
1230 1	271.62	109.46	70.82	30.12	-824	1.059	0.000 276.93	.020	.139	.222	.261	0.000	0.000
1230 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000 0.000	0.000 0.000	0.000 0.000	0.000 0.000	0.000	0.000
1230 3	281.22	118.17	64.22	30.81	-447	1.290	0.000 284.87	-.035	.155	.309	.265	0.000	0.000
1330 1	260.99	117.02	85.76	25.74	-576	2.368	0.000 273.30	.009	.109	.235	.309	0.000	0.000
1330 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000 0.000	0.000 0.000	0.000 0.000	0.000 0.000	0.000	0.000
1330 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000 0.000	0.000 0.000	0.000 0.000	0.000 0.000	0.000	0.000
1400 1	289.12	97.53	73.65	32.05	-808	.229	0.000 297.77	.014	.120	.178	.252	0.000	0.000
1400 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000 0.000	0.000 0.000	0.000 0.000	0.000 0.000	0.000	0.000
1400 3	280.72	98.93	71.41	31.80	-697	-.320	0.000 286.87	-.020	.127	.219	.260	0.000	0.000
1430 1	303.78	87.72	83.25	33.58	-890	.077	0.000 314.30	.014	.120	.106	.261	0.000	0.000
1430 2	380.95	102.27	104.50	41.20	-1309	-4.365	0.000 396.51	.035	.117	.086	.270	0.000	0.000
1430 3	312.25	96.84	89.64	34.03	-929	-.111	0.000 321.88	-.013	.119	.088	.280	0.000	0.000
1500 1	340.74	90.69	87.50	36.26	-1035	.615	0.000 351.08	.011	.112	.166	.244	0.000	0.000
1500 2	435.77	108.52	104.44	46.22	-1685	-4.494	0.000 450.04	.025	.117	.072	.243	0.000	0.000
1500 3	362.14	94.45	85.27	36.50	-1002	.536	0.000 369.11	-.023	.107	.179	.234	0.000	0.000
1530 1	371.69	95.84	75.50	39.41	-1268	.318	0.000 379.03	.008	.111	-.038	.200	0.000	0.000
1530 2	486.15	103.48	67.30	41.28	-1103	-2.908	0.000 492.18	.035	.090	-.157	.145	0.000	0.000
1530 3	382.52	95.14	77.57	39.92	-1277	.230	0.000 388.72	-.018	.110	-.002	.200	0.000	0.000
1600 1	419.19	101.64	76.59	42.85	-1688	.802	0.000 425.77	.003	.108	-.237	.178	0.000	0.000
1600 2	546.56	92.64	62.53	43.58	-1151	-.824	0.000 553.61	.036	.081	-.320	.111	0.000	0.000
1600 3	450.94	91.84	80.50	43.81	-1423	-.376	0.000 454.81	-.011	.102	-.223	.176	0.000	0.000
1630 1	426.29	100.66	79.87	44.46	-1572	1.049	0.000 433.38	.003	.109	-.135	.183	0.000	0.000
1630 2	544.95	103.47	56.01	45.37	-1303	-1.411	0.000 549.63	.037	.083	-.256	.095	0.000	0.000
1630 3	436.83	93.06	84.55	43.31	-1401	.097	0.000 442.32	-.014	.103	-.158	.187	0.000	0.000
1700 1	444.67	105.99	68.17	44.79	-1622	-.856	0.000 449.59	.001	.107	-.249	.153	0.000	0.000
1700 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000 0.000	0.000 0.000	0.000 0.000	0.000 0.000	0.000	0.000
1700 3	478.94	101.87	76.18	46.76	-1648	-1.351	0.000 481.75	-.010	.104	-.222	.158	0.000	0.000
1730 1	439.96	111.92	66.30	45.39	-1742	.084	0.000 444.56	.001	.043	-.280	.148	0.000	0.000
1730 2	580.67	105.30	61.95	46.24	-1114	-2.636	0.000 588.72	.037	.081	-.367	.103	0.000	0.000
1730 3	471.42	107.36	72.68	45.99	-1536	-1.489	0.000 472.69	-.008	.102	-.279	.151	0.000	0.000
1800 1	398.85	99.63	55.25	40.28	-1404	-.313	0.000 402.29	0.000	.107	-.300	.136	0.000	0.000
1800 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000 0.00	0.000 0.000	0.000 0.000	0.000 0.000	0.000 0.000	0.000	0.000
1800 3	430.83	95.96	60.06	42.51	-1389	-.918	0.000 430.87	-.007	.104	-.303	.140	0.000	0.000
1830 1	337.57	85.04	43.71	35.44	-1018	-.378	0.000 340.08	.001	.110	-.313	.127	0.000	0.000
1830 2	443.85	80.97	49.76	32.31	-248	-2.139	0.000 449.23	.035	.073	-.309	.107	0.000	0.000
1830 3	351.62	81.34	44.24	34.83	-.925	-.635	0.000 350.75	-.007	.104	-.324	.128	0.000	0.000
1900 1	275.16	66.77	42.64	29.38	-.685	-.563	0.000 278.31	.005	.111	-.181	.155	0.000	0.000
1900 2	382.96	67.74	41.64	31.11	-.068	-2.282	0.000 385.96	.034	.080	-.192	.102	0.000	0.000
1900 3	285.83	67.99	44.17	29.51	-.655	-.577	0.000 287.79	-.010	.107	-.168	.152	0.000	0.000

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV HEAT TRANSCAL/(CM2-MIN).....	EM HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED	
										VSO F	G PARTS PER THOUSAND
50467											
1230 1	.2403	.0072	.0160	-.5444	-.0528	.1796 19.	.8670	0.0000	0.0000	0	0
1230 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1230 3	.3258	-.0304	-.0280	-.0568	-.0135	.1524 20.	.7770	0.0000	0.0000	0	0
1330 1	.2675	.0025	.0330	-1.2067	-.1970	.1589 19.	.7350	0.0000	0.0000	0	0
1330 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1330 3	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1400 1	.1829	.0049	.0190	-.2863	.0337	.1115 19.	.6700	0.0000	0.0000	0	0
1400 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1400 3	.2107	-.0287	-.0360	-.1149	.0539	.1157 20.	.6730	0.0000	0.0000	0	0
1430 1	.1042	.0045	.0220	-.2127	.0407	.1071 19.	.5220	0.0000	0.0000	0	0
1430 2	.0566	.0277	-.0080	-.2209	.1018	.1100 19.	.4840	0.0000	0.0000	0	0
1430 3	.0872	-.0238	-.0240	-.1083	.0974	.1088 21.	.5130	0.0000	0.0000	0	0
1500 1	.1694	.0033	.0260	-.2491	-.0047	.0877 19.	.4170	0.0000	0.0000	0	0
1500 2	.0521	.0184	-.0300	-.2052	.0551	.1162 19.	.3340	0.0000	0.0000	0	0
1500 3	.1795	-.0314	-.0260	-.2661	-.0453	.0788 20.	.3960	0.0000	0.0000	0	0
1530 1	-.0377	.0004	.0170	-.2741	.0136	.0602 19.	.3410	0.0000	0.0000	0	0
1530 2	-.1704	.0305	.1060	-.2871	.1268	.0708 19.	.3180	0.0000	0.0000	0	0
1530 3	-.0001	-.0265	-.0200	-.2342	.0046	.0598 20.	.2900	0.0000	0.0000	0	0
1600 1	-.2337	-.0049	.0340	-.1887	.0172	.0466 18.	.2440	0.0000	0.0000	0	0
1600 2	-.3264	.0325	.1390	-.1384	.0414	.0354 18.	.2970	0.0000	0.0000	0	0
1600 3	-.2242	-.0181	-.0140	-.1300	-.0066	.0354 19.	.3270	0.0000	0.0000	0	0
1630 1	-.1308	-.0043	.0380	-.1565	-.0207	.0243 17.	.2420	0.0000	0.0000	0	0
1630 2	-.2624	.0332	.2830	-.1765	.0168	.0152 18.	.2810	0.0000	0.0000	0	0
1630 3	-.1573	-.0214	-.0410	-.0891	-.0430	.0190 19.	.2050	0.0000	0.0000	0	0
1700 1	-.2540	-.0066	.0460	-.1844	.0478	-.0083 16.	.3820	0.0000	0.0000	0	0
1700 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1700 3	-.2262	-.0176	-.0160	-.1391	.0361	-.0064 18.	.4360	0.0000	0.0000	0	0
1730 1	-.2807	-.0064	.0410	.1461	-.0140	-.0359 15.	.3600	0.0000	0.0000	0	0
1730 2	-.3783	.0340	.1790	.0322	-.0471	-.0271 16.	.3640	0.0000	0.0000	0	0
1730 3	-.2833	-.0146	-.0090	.1524	-.0594	-.0297 16.	.4130	0.0000	0.0000	0	0
1800 1	-.3030	-.0075	.0880	.3176	-.0162	-.0606 14.	.4470	0.0000	0.0000	0	0
1800 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1800 3	-.3060	-.0140	-.0260	.3548	-.0095	-.0496 15.	.4460	0.0000	0.0000	0	0
1830 1	-.3171	-.0068	.1060	.4818	-.0513	-.0524 12.	.4680	0.0000	0.0000	0	0
1830 2	-.3217	.0330	.1830	.3470	-.1347	-.0152 13.	.3820	0.0000	0.0000	0	0
1830 3	-.3277	-.0141	-.0080	.3806	-.0611	-.0458 14.	.4720	0.0000	0.0000	0	0
1900 1	-.1886	-.0025	.0610	.2890	-.0247	-.0540 11.	.4440	0.0000	0.0000	0	0
1900 2	-.2062	.0304	.3040	.1695	-.0789	-.0308 12.	.3790	0.0000	0.0000	0	0
1900 3	-.1734	-.0180	-.0130	.2298	-.0052	-.0441 12.	.4120	0.0000	0.0000	0	0

TIME SITE	MEAN	USD	VSD	VSD	REYNOLDS	RUV	RUV	HORIZ	F	FSS	G	GSD	WIND	WIND
START	WIND	CM/SEC	ST	DEV	STRESSES	CM/SEC	CM/SEC	ELEV	ANGLE	ANGLE	AZIM	ANGLE	DIR	SHIFT
50667														
1930 1	278.77	71.04	48.86	28.93	-565	-1.028	0.000	282.81	-0.02	.107	-186	.174	0.000	0.000
1930 2	373.40	65.37	45.55	30.98	-138	-2.376	0.000	377.04	.239	.082	-186	.120	0.000	0.000
1930 3	294.41	68.50	46.41	30.45	-594	-.840	0.000	296.36	-.012	.106	-151	.156	0.000	0.000
2000 1	292.97	71.25	43.91	31.21	-679	-.746	0.000	298.05	0.000	.111	-235	.149	0.000	0.000
2000 2	398.31	72.16	43.82	33.65	-.072	-2.297	0.000	401.76	.040	.082	-227	.133	0.000	0.000
2000 3	291.21	62.38	43.66	30.29	-630	-.165	0.000	292.42	-.010	.107	-240	.159	0.000	0.000
2030 1	335.65	78.57	47.38	34.99	-.975	-.808	0.000	335.74	0.000	.110	-291	.161	0.000	0.000
2030 2	444.08	78.42	50.69	34.87	-458	-2.239	0.000	449.32	.037	.079	-295	.109	0.000	0.000
2030 3	345.56	75.73	49.74	34.99	-.888	-.635	0.000	346.11	-.008	.106	-282	.144	0.000	0.000
50567														
735 1	231.23	60.86	48.58	25.15	-.501	-.757	0.000	236.36	-.004	.119	-169	.221	0.000	0.000
735 2	288.51	62.72	49.68	24.85	-.251	-.680	0.000	294.10	.016	.106	-186	.178	0.000	0.000
735 3	235.93	59.43	47.14	25.71	-.590	-.289	0.000	242.48	-.003	.117	-.003	.260	0.000	0.000
800 1	196.85	64.81	60.36	23.06	-.546	-.892	0.000	205.64	.004	.114	-167	.304	0.000	0.000
800 2	238.85	63.97	65.39	29.38	-.223	-1.586	0.000	249.28	.234	.131	-153	.274	0.000	0.000
800 3	215.24	68.93	65.71	23.20	-.442	-.719	0.000	222.92	-.008	.131	-.079	.298	0.000	0.000
830 1	248.65	115.80	90.76	28.03	-.530	6.682	0.000	264.78	0.000	.122	-.042	.382	0.000	0.000
830 2	301.98	134.01	107.88	35.55	-.483	9.150	0.000	322.44	.019	.131	-.066	.346	0.000	0.000
830 3	236.60	112.41	77.23	28.05	-.692	-.318	0.000	246.41	-.010	.134	-.032	.537	0.000	0.000
900 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
900 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
900 3	355.22	78.60	19.27	37.03	-.978	.287	0.000	361.70	-.020	.109	-.129	.218	0.000	0.000
930 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
930 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
930 3	392.99	87.44	77.62	19.81	-1.151	.152	0.000	398.43	-.020	.106	-.124	.137	0.000	0.000
940 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
940 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
940 3	424.69	91.60	76.17	42.20	-1.470	.942	0.000	427.30	-.022	.107	-.261	.173	0.000	0.000
1000 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1000 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1000 3	429.63	98.54	90.39	44.14	-1.536	1.192	0.000	435.50	-.018	.109	-.219	.210	0.000	0.000
1100 1	386.29	106.08	67.72	47.30	-1.447	.868	0.000	398.04	.004	.111	-.097	.223	0.000	0.000
1100 2	500.71	110.54	99.95	43.87	-1.183	2.199	0.000	511.66	.319	.052	-.085	.153	0.000	0.000
1100 3	397.34	110.74	92.31	40.71	-1.185	.393	0.000	404.93	-.015	.108	-.115	.222	0.000	0.000
1130 1	349.75	98.94	104.04	37.96	-1.105	3.035	0.000	364.54	.003	.113	-.068	.291	0.000	0.000
1130 2	447.69	101.07	122.32	42.56	-1.129	5.119	0.000	466.52	-.023	.095	-.080	.267	0.000	0.000
1130 3	366.65	98.44	103.55	17.38	-2.342	-.726	0.000	374.83	-.035	.112	-.102	.267	0.000	0.000

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED VSU F G
START	KAD	RAD	RAD	SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HEAT TRANS ...CAL/(CM2-MIN)...	MEAN ST DEV CENTIGRADE		LATENT HEAT TRANS ...CAL/(CM2-MIN)...			PARTS PER THOUSAND
50467											
1930 1	-0.1969	-0.0097	0.0590	0.2861	-0.0106	-0.0439 11.	3.50	0.0000	0.0000	0.0000	0 0 0
1930 2	-0.2028	-0.0157	0.1660	0.1371	-0.0141	-0.0303 11.	2.330	0.0000	0.0000	0.0000	0 0 0
1930 3	-0.1988	-0.0117	0.0940	0.2653	-0.0131	-0.0404 12.	3.400	0.0000	0.0000	0.0000	0 0 0
2000 1	-0.2473	-0.0282	0.0680	0.3276	-0.0702	-0.0472 10.	3.590	0.0000	0.0000	0.0000	0 0 0
2000 2	-0.2413	-0.0370	0.3170	0.2576	-0.1371	-0.0148 11.	3.570	0.0000	0.0000	0.0000	0 0 0
2000 3	-0.2410	-0.0157	-0.0110	0.2601	-0.0365	-0.0407 11.	3.540	0.0000	0.0000	0.0000	0 0 0
2030 1	-0.2965	-0.0080	0.0710	0.2233	-0.0053	-0.0512 10.	2.520	0.0000	0.0000	0.0000	0 0 0
2030 2	-0.3022	-0.0338	0.2140	0.1873	-0.0486	-0.0439 10.	2.470	0.0000	0.0000	0.0000	0 0 0
2030 3	-0.2858	-0.0154	-0.0230	0.2260	-0.0228	-0.0447 11.	2.750	0.0000	0.0000	0.0000	0 0 0
50567											
735 1	-0.1822	-0.0144	0.0480	0.3127	0.1328	0.196 13.	1.4560	0.0000	0.0000	0.0000	0 0 0
735 2	-0.1960	0.1140	0.0700	0.0161	-0.0808	0.0760 13.	1.3680	0.0000	0.0000	0.0000	0 0 0
735 3	-0.0023	-0.0131	-0.0430	0.2882	-0.1294	0.1118 14.	5.000	0.0000	0.0000	0.0000	0 0 0
800 1	-0.1816	-0.0070	0.0260	0.0935	-0.0230	0.0908 13.	5.680	0.0000	0.0000	0.0000	0 0 0
800 2	-0.1863	0.0245	-0.0520	0.0141	-0.0264	0.0950 13.	3.850	0.0000	0.0000	0.0000	0 0 0
800 3	0.0647	-0.0118	-0.0280	0.2021	0.0050	0.1079 13.	5.590	0.0000	0.0000	0.0000	0 0 0
830 1	0.1536	-0.0047	0.0200	0.1240	0.1189	0.0395 13.	2.610	0.0000	0.0000	0.0000	0 0 0
830 2	0.1501	0.0100	-0.0520	0.2042	0.1297	0.0423 13.	2.500	0.0000	0.0000	0.0000	0 0 0
830 3	0.0138	-0.0201	-0.0520	0.2161	-0.0222	0.0389 14.	3.060	0.0000	0.0000	0.0000	0 0 0
840 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
840 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
840 3	0.1284	-0.0281	-0.0060	0.1360	0.0331	0.0578 14.	2.200	0.0000	0.0000	0.0000	0 0 0
900 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
900 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
900 3	0.1243	-0.0274	-0.0280	0.2621	0.0420	0.0623 15.	2.850	0.0000	0.0000	0.0000	0 0 0
930 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
930 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
930 3	0.2637	-0.0303	-0.0180	0.3216	0.0263	0.1054 15.	3.920	0.0000	0.0000	0.0000	0 0 0
1000 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1000 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
1000 3	0.2222	-0.0265	-0.0200	0.5607	0.0460	0.1586 16.	6.070	0.0000	0.0000	0.0000	0 0 0
1100 1	-0.0925	-0.0040	0.0230	0.3158	0.0171	0.1131 14.	4.260	0.0000	0.0000	0.0000	0 0 0
1100 2	-0.0787	0.0153	-0.0400	0.2389	-0.0512	0.1050 14.	3.820	0.0000	0.0000	0.0000	0 0 0
1100 3	-0.1121	-0.0217	-0.0420	0.3587	-0.0242	0.0935 16.	4.340	0.0000	0.0000	0.0000	0 0 0
1130 1	-0.0438	-0.0049	0.0160	0.2301	0.1079	0.1069 14.	4.770	0.0000	0.0000	0.0000	0 0 0
1130 2	-0.0375	0.0184	-0.0300	0.1140	0.0843	0.1062 14.	3.340	0.0000	0.0000	0.0000	0 0 0
1130 3	-0.0836	0.0492	0.010	0.2617	0.1102	0.1025 14.	7.350	0.0000	0.0000	0.0000	0 0 0

TIME SITE START	MEAN WIND	USD WIND ST DEV	VSD CM/SEC	WSD CM/SEC	RUM REYNOLDS STRESSES	RUV DYNES/CM2	RWV CM/SEC	HORIZ CM/SEC	F ELEV ANGLE	FSD ANGLE	G AZIM	GSD ANGLE	HIND DIR	WIND SHIFT
91168														
30 1	107.08	39.07	33.35	18.59	-260	-004	.067	112.28	.026	.186	.015	.322	5.774	0.000
30 2	104.16	40.11	41.40	24.44	-599	-200	-.107	112.28	.071	.317	.040	.487	5.999	0.000
715 1	126.73	43.80	41.59	22.51	-414	.037	.001	133.64	.043	.206	.014	.356	5.244	0.000
715 2	126.72	43.75	24.30	27.03	-441	.061	.025	128.74	.055	.252	-.002	.149	5.728	1.872
745 1	144.91	46.15	48.65	25.47	-539	-.038	.033	153.15	.036	.195	.012	.344	5.368	.121
740 2	144.91	56.59	34.74	30.19	-759	.075	-.055	148.48	.048	.244	-.005	.158	5.731	.008
830 1	195.71	70.02	68.69	33.60	-.920	-1.154	.117	207.41	.037	.191	.023	.350	5.410	.053
830 2	195.69	75.83	47.04	41.33	-1.442	-.797	-.028	201.09	.050	.242	0.000	.188	5.750	.011
900 1	166.97	64.64	69.07	29.13	-.659	.117	.050	180.56	.042	.207	.027	.416	5.271	-.135
900 2	166.95	69.18	51.75	35.85	-1.007	.001	-.038	173.77	.061	.244	-.002	.202	5.602	-.145
1000 1	211.22	74.80	75.97	36.49	-1.049	-.091	.112	224.30	.036	.192	.036	.366	5.460	.319
1000 2	211.20	89.59	57.58	43.49	-1.647	-.341	.007	218.32	.056	.235	-.001	.195	5.774	-.035
1135 1	224.74	86.67	77.65	37.26	-1.095	-.471	.108	238.46	.034	.187	.034	.368	5.418	-.044
1135 2	218.19	87.27	60.44	37.40	-1.115	.019	-.073	226.29	.044	.251	.001	.287	5.742	-.056
1230 1	222.47	85.30	89.09	38.66	-1.158	-1.858	.098	240.66	.038	.190	.009	.417	5.336	-.108
1230 2	228.02	89.82	80.31	37.75	-1.191	-2.569	-.132	242.53	.042	.197	-.008	.379	5.645	-.087
1330 1	214.62	83.41	87.93	37.53	-1.032	-.312	.044	232.19	.045	.199	-.010	.413	5.055	-.299
1330 2	210.34	85.27	75.25	37.58	-1.407	-.810	.071	222.20	.064	.219	-.010	.325	5.355	-.288
1400 1	231.40	96.72	94.09	38.91	-1.153	-1.963	.052	249.46	.042	.200	-.007	.404	5.089	.037
1400 2	226.65	90.14	77.95	38.15	-1.334	-1.696	-.054	239.23	.051	.200	-.007	.340	5.408	.050
1430 1	146.59	96.59	79.02	29.87	-.875	-1.493	.146	167.70	.096	.277	-.017	.756	4.580	-.570
1430 2	185.09	72.89	71.84	31.34	-.841	-.877	.004	157.62	.039	.197	-.004	.361	5.088	-.323
1500 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1500 2	162.31	71.29	64.22	30.33	-.793	-1.363	-.096	173.53	.057	.227	-.005	.366	5.136	.049
1535 1	181.97	78.40	54.63	30.47	-.765	-.096	-.080	189.95	.047	.209	-.007	.331	4.868	-.034
1535 2	183.06	70.43	51.48	30.18	-.783	-.043	-.062	190.23	.034	.200	-.006	.274	5.100	-.034
1605 1	160.88	72.94	56.21	28.89	-.699	-.456	-.003	149.96	.049	.214	-.080	.372	4.845	-.035
1605 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1640 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1640 2	138.17	63.35	42.14	25.18	-.556	-.092	-.020	143.71	.043	.219	-.008	.274	4.875	-.191
1840 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1840 2	68.35	30.89	20.09	13.30	-.103	-.127	-.023	70.98	.018	.194	.141	.287	5.074	.955
91268														
710 1	111.84	46.69	34.14	20.27	-.280	-.075	-.026	117.11	.039	.233	-.041	.348	4.327	.112
710 2	103.43	51.34	23.86	18.67	-.356	-.162	-.025	106.76	.095	.258	-.239	.392	3.870	.112
740 1	103.63	51.23	39.79	21.03	-.308	-.122	-.018	110.86	.067	.272	-.023	.401	4.392	.047
740 2	99.09	48.04	46.30	22.46	-.368	-.014	-.031	108.62	.056	.286	.113	.449	4.128	-.094

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED		
									VSO F	% PARTS PER 100,000	
91168											
30 1	-1.40	.1074	0.0000	-0.693	-0.077	-0.220	0.0000	0.0000	0.0000	122	1377
30 2	-0.050	.0227	0.0000	-0.798	-0.062	-0.390	0.0000	0.0000	0.0000	124	9739
715 1	1.2355	-0.163	0.0000	-0.925	-0.221	.0576	0.0000	0.0000	0.0000	144	2347
715 2	1.2838	-0.156	0.0000	-0.865	-0.118	.0536	0.0000	0.0000	0.0000	452	9216
740 1	-1.229	-0.131	0.0000	-1.686	-0.018	.0781	0.0000	0.0000	0.0000	44	1505
740 2	-0.039	.0034	0.0000	-2.408	.0085	.0711	0.0000	0.0000	0.0000	1392	10551
830 1	-0.0745	-0.142	0.0000	.3946	.0721	.1234	0.0000	0.0000	0.0000	188	1499
830 2	-0.0202	-0.108	0.0000	-3.164	-0.067	.1679	0.0000	-0.1598	.2631	400	8468
900 1	.1504	-0.123	0.0000	-2.895	-0.115	.1447	0.0000	0.0000	0.0000	891	2822
900 2	.1558	-0.124	0.0000	-4.346	-0.1602	.1796	0.0000	.0169	.2814	1706	11186
1000 1	-0.0388	-0.129	0.0000	-4.250	.0349	.1886	0.0000	0.0000	0.0000	193	1588
1000 2	.0336	-0.177	0.0000	-5.811	.0415	.1913	0.0000	.4325	.2768	690	9273
1135 1	.0389	-0.107	0.0000	-1.093	-0.060	.0425	0.0000	0.0000	0.0000	232	1462
1135 2	.0311	.0078	0.0000	-3.589	-0.253	.1306	0.0000	.2958	.2009	665	1199
1230 1	.0837	-0.161	0.0000	-3.380	-0.1081	.1929	0.0000	0.0000	0.0000	250	1402
1230 2	.0512	-0.178	0.0000	-3.239	-0.1512	.1749	0.0000	-1.6744	.1849	140	297
1330 1	.3016	.0224	0.0000	-3.974	-0.0806	.1681	0.0000	0.0000	0.0000	711	2076
1330 2	.2757	.0241	0.0000	-4.865	-0.125	.1665	0.0000	-1.007	-0.4971	1140	3847
1400 1	-0.0615	-0.127	0.0000	-2.631	-0.0943	.0972	0.0000	0.0000	0.0000	1184	2661
1400 2	-0.0809	.0216	0.0000	-2.117	-0.1868	.1042	0.0000	.1671	.1382	661	2820
1430 1	.3008	.0214	0.0000	-0.501	-0.0751	.0459	0.0000	0.0000	0.0000	6275	10946
1430 2	.3090	.0119	0.0000	-0.371	-0.1194	.0352	0.0000	-1.1318	.6482	601	2315
1500 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1500 2	-0.0991	.0186	0.0000	-2.632	.0751	.0828	0.0000	-1.6433	.2042	1398	4140
1535 1	-1.186	-0.163	0.0000	-1.179	-0.114	.0325	0.0000	0.0000	0.0000	1155	3336
1535 2	.0375	.0058	0.0000	-1.780	.0084	.0425	0.0000	.0793	-.5245	318	2101
1605 1	.0091	.0188	0.0000	.1178	.0649	-.0022	0.0000	0.0000	0.0000	1123	3385
1605 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1640 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1640 2	.1765	.0102	0.0000	.0090	-0.030	.0023	0.0000	.1961	.1004	644	3569
1840 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1840 2	-0.9846	.0002	0.0000	.0622	-0.110	-.0288	0.0000	.0004	.0027	561	2230
91268											
710 1	-0.6490	.0070	0.0000	-0.0157	-0.0396	.0361	0.0000	0.0000	0.0000	889	4334
710 2	-0.2063	.0224	0.0000	-0.543	-0.0207	.0307	0.0000	.0188	.0100	5957	10328
740 1	-0.0889	-0.135	0.0000	-1.215	.0216	.0476	0.0000	0.0000	0.0000	2898	8340
740 2	.0620	.0008	0.0000	-0.832	-0.0153	.0499	0.0000	-0.1707	.0808	2700	9163

TIME SITE	MEAN	USD	VSD	WSD	RUM	RUV	RWV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	WIND	WIND	WIND	REYNOLDS	STRESSES	CM/SEC	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT

91268														
810 1	93.95	51.80	37.23	19.13	-245	-378	-0.18	101.08	.079	.296	-0.40	.475	4.759	.383
810 2	87.55	51.97	44.24	20.49	-232	-848	-1.23	96.99	.108	.325	.182	.490	5.121	.925
900 1	134.13	61.37	45.84	26.04	-544	.341	.045	142.07	.058	.249	-1.70	.388	5.010	.381
900 2	133.73	60.34	38.85	24.99	-592	-532	-0.68	139.90	.081	.248	-1.57	.366	5.310	.528
930 1	162.66	74.70	55.82	29.70	-699	-105	-0.09	171.84	.055	.230	-0.25	.364	4.956	-1.198
930 2	150.35	77.63	56.94	30.35	-921	-612	-1.34	166.38	.075	.261	.101	.388	5.382	-1.586
1005 1	214.08	81.94	70.17	36.55	-1057	.139	-1.24	225.65	.040	.198	.007	.345	4.879	-1.110
1005 2	192.78	91.03	64.36	36.29	-1110	-577	-0.53	202.80	.064	.258	.258	.337	5.409	-1.131
1035 1	185.77	87.79	74.54	32.83	-763	-770	-0.93	199.72	.044	.235	.105	.418	4.740	-2.237
1035 2	152.98	98.11	56.01	33.62	-966	-2.122	-0.145	177.64	.106	.308	.165	.681	4.844	-4.472
1105 1	196.15	96.60	73.35	34.51	-916	-879	-2.16	209.34	.060	.239	.047	.404	4.788	.106
1105 2	180.21	102.31	64.64	33.15	-923	-1.094	-2.71	191.30	.100	.278	-1.00	.439	4.567	-0.012
1135 1	153.40	94.82	68.49	31.61	-821	-084	-1.59	166.18	.079	.289	.162	.436	4.722	-1.181
1135 2	138.59	93.78	69.03	30.73	-810	-1.533	-2.33	152.38	.119	.328	.089	.485	4.580	-1.176
1205 1	137.38	108.69	60.44	29.08	-616	.095	-0.65	147.40	.162	.351	.212	.419	4.873	.100
1205 2	161.39	91.89	59.10	33.53	-1017	-520	-1.45	177.36	.105	.298	.093	.464	4.589	-4.422
1305 1	149.41	113.81	71.21	34.56	-861	.547	-1.61	210.97	.066	.277	.207	.365	4.426	-4.422
1305 2	179.55	104.00	75.01	37.54	-1230	-120	-0.10	192.76	.097	.405	.291	.393	4.459	-1.141
1335 1	174.72	83.03	65.31	32.56	-675	.518	-1.65	185.77	.024	.240	.018	.381	4.222	-0.014
1335 2	160.22	86.53	64.28	33.36	-873	-555	-1.58	172.78	.058	.281	.109	.410	4.320	.002
1430 1	201.76	66.17	61.11	34.34	-911	.312	-0.83	210.59	.018	.208	.024	.309	4.111	-1.118
1430 2	197.76	87.24	63.35	34.95	-1242	-193	-0.06	207.39	.026	.226	.145	.323	4.232	-1.123
1500 1	168.70	76.69	64.25	31.47	-895	.740	-0.23	179.84	.035	.234	.026	.375	4.201	.089
1500 2	157.89	79.07	63.49	31.00	-896	.022	-0.11	169.73	.063	.263	.252	.390	4.392	.053
1530 1	144.24	72.53	51.35	28.03	-605	.234	-0.13	157.85	.057	.262	.057	.372	4.155	-0.078
1530 2	141.48	73.53	53.12	28.17	-768	.271	-0.75	150.59	.056	.265	.272	.367	4.355	-0.057
1600 1	167.39	74.29	57.43	31.68	-826	-390	-0.15	176.74	.031	.233	.028	.353	4.206	.080
1600 2	168.38	78.35	61.13	31.49	-877	-725	-0.165	178.58	.031	.240	.185	.357	4.376	.108
1630 1	147.30	57.29	44.92	25.72	-422	-416	-0.45	154.09	.014	.207	.014	.320	4.191	-0.002
1630 2	133.03	55.63	47.95	26.12	-643	-271	-0.91	141.09	.059	.250	.179	.355	4.336	-0.034
1710 1	106.03	40.08	29.83	18.27	-251	-099	-0.07	110.20	.008	.196	.009	.293	4.104	-0.082
1710 2	95.61	42.89	29.13	10.28	-234	-391	-0.28	99.67	.020	.244	.346	.292	4.367	-1.136
1740 1	73.94	21.62	16.57	9.46	-036	.085	.000	75.66	-0.020	.153	.009	.227	3.756	-1.348
1740 2	70.92	24.20	14.85	8.80	-036	.058	.043	72.42	.014	.199	.077	.210	3.972	-1.126
1805 1	76.02	16.79	14.17	7.38	-028	-018	.003	77.34	-0.025	.116	.065	.198	3.070	-0.081
1805 2	78.53	13.99	14.65	6.35	-017	-045	-0.62	79.89	-0.023	.088	.052	.190	3.954	.007

TIME SITE START	E: A RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	AIR TEMP	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED VSQ F G PARTS PER 100+000
91268										
810 1	-0.5043	0.0065	0.0000	-1.189	-0.0587	0.815 16.	6680	0.0000	0.0000	5758 11009 27059
810 2	-1.0694	0.0207	0.0000	-0.825	-0.1843	0.887 16.	6380	-0.9211	0.8042	7775 16061 29455
900 1	-0.4253	0.0227	0.0000	-2.101	-0.0437	1.229 20.	-4090	0.0000	0.0000	1261 5640 16190
900 2	-0.5937	0.0312	0.0000	-1.825	-0.0604	1.160 21.	7980	-0.2673	0.0545	2242 6940 10661
930 1	0.1867	0.0172	0.0000	-2.629	0.0165	1.372 21.	6910	0.0000	0.0000	2153 4688 9479
930 2	0.1390	0.0176	0.0000	-3.521	0.0316	1.474 22.	7180	-0.4144	0.0275	3417 7980 17139
1005 1	0.1023	0.0149	0.0000	-3.840	-0.0889	1.647 20.	6820	0.0000	0.0000	362 1996 3423
1005 2	0.0891	0.0044	0.0000	-3.766	-0.0230	1.464 22.	6830	0.0000	0.0000	4805 7551 19855
1035 1	0.1951	0.0064	0.0000	-4.288	-0.0324	1.465 23.	7170	0.0000	0.0000	2114 5079 8763
1035 2	0.2741	0.0047	0.0000	-5.873	-0.0243	1.442 24.	7730	1.4050	-4.2056	9430 14768 26125
1105 1	0.1523	0.0117	0.0000	-3.917	-0.0738	1.670 24.	7060	0.0000	0.0000	3765 6197 12103
1105 2	0.0906	0.0180	0.0000	-4.307	-0.0877	1.509 24.	7130	-0.5743	-0.0944	9026 11696 18339
1135 1	0.1503	0.0057	0.0000	-6.614	-0.0050	1.578 24.	8340	0.0000	0.0000	5463 10858 16346
1135 2	0.0375	0.0053	0.0000	-5.387	0.0031	1.493 25.	8000	-0.1859	-0.0725	12375 17826 30444
1205 1	0.1461	0.0071	0.0000	-7.367	-0.0471	0.881 24.	8170	0.0000	0.0000	17811 24367 33407
1205 2	0.0912	0.0111	0.0000	-3.943	0.0465	1.312 25.	7200	-0.3246	-0.2921	9015 13532 25252
1505 1	0.4231	0.0107	0.0000	-2.796	0.0488	1.239 25.	6240	0.0000	0.0000	7944 10484 15254
1505 2	1.1036	0.0018	0.0000	-3.875	0.1130	1.487 25.	6580	-0.5050	0.2740	8508 15672 30045
1235 1	0.0046	0.0134	0.0000	-3.382	0.0214	1.240 25.	6840	0.0000	0.0000	1584 5005 8061
1335 1	0.0383	0.0001	0.0000	-3.858	0.0435	1.657 25.	7170	-0.0970	-0.1486	3120 9346 16356
1430 1	0.1135	0.0091	0.0000	-3.143	0.0329	0.978 15.	4980	0.0000	0.0000	785 2638 4498
1430 2	0.1068	0.0125	0.0000	-3.842	0.0121	1.175 26.	5170	-0.2694	-0.1770	834 1926 9569
1500 1	0.0952	0.0001	0.0000	-2.812	0.0171	0.906 15.	4870	0.0000	0.0000	957 4173 7660
1500 2	0.0828	0.0024	0.0000	-3.063	0.0238	0.919 26.	6680	-0.1604	0.2019	2864 7890 22456
1530 1	0.0585	0.0081	0.0000	-2.124	0.0265	0.729 15.	4310	0.0000	0.0000	2892 7224 12557
1530 2	0.0431	0.0003	0.0000	-2.565	-0.0154	0.670 26.	4230	-0.1770	0.0552	2561 7684 20981
1600 1	0.1077	0.0042	0.0000	-1.246	0.0208	0.413 15.	2670	0.0000	0.0000	1541 4244 8461
1600 2	0.1429	0.0069	0.0000	-1.605	0.0318	0.418 25.	2390	-0.5016	-0.0775	1025 4903 14892
1630 1	0.0194	0.0091	0.0000	-0.134	0.0050	0.027 15.	2110	0.0000	0.0000	437 2389 5899
1630 2	0.0076	0.0140	0.0000	-0.538	0.0057	0.105 25.	1490	-0.3391	0.1575	1230 6230 16049
1710 1	0.0733	0.0142	0.0000	0.122	-0.0465	-0.0265 23.	4200	0.0000	0.0000	238 1889 514
1710 2	0.0888	0.0127	0.0000	0.1232	-0.0430	-0.156 23.	3450	-0.7071	0.4165	1366 4953 2516
1740 1	0.3343	0.0316	0.0000	0.103	-0.0313	-0.111 21.	4810	0.0000	0.0000	854 1677 4647
1740 2	1.4649	0.0164	0.0000	-0.256	-0.0422	-0.143 21.	6070	0.0504	-0.3270	3357 4734 10711
1805 1	0.0791	0.0314	0.0000	0.861	-0.0235	-0.125 26.	1730	0.0000	0.0000	34 470 1892
1805 2	0.0110	0.0252	0.0000	0.523	-0.0440	-0.2084 20.	5270	0.0401	-0.0079	0 57 503

TIME SITE	MEAN	USD	WSD	WSD	RUM	RUV	RWV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	WIND ST	DEV	SEC	REYNOLDS	STRESSES	CM/SEC	CM/SEC	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
91368														
145 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
145 2	111.41	42.59	8.53	2.95	-0.024	-0.320	-0.012	111.80	-0.001	0.107	0.187	0.125	4.426	-0.030
215 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
215 2	168.01	53.31	8.43	4.76	-0.092	-0.121	-0.015	168.23	-0.002	0.044	0.054	0.062	4.349	0.057
245 1	162.69	44.43	9.37	4.37	-0.020	0.051	0.000	162.91	0.000	0.038	-0.013	0.057	4.334	0.022
245 2	161.55	53.47	8.68	4.88	-0.110	0.001	-0.013	161.75	0.002	0.042	-0.001	0.054	4.317	0.022
315 1	146.87	32.50	7.19	3.28	-0.052	-0.024	-0.009	147.03	-0.002	0.032	-0.011	0.050	4.328	-0.008
315 2	142.80	34.10	6.47	3.45	-0.068	-0.018	-0.012	142.73	-0.001	0.036	0.000	0.049	4.314	-0.004
335 1	167.12	41.34	8.65	4.79	-0.087	0.000	-0.012	167.32	-0.001	0.034	-0.009	0.050	4.351	0.022
335 2	169.70	46.20	9.02	5.46	-0.130	-0.019	-0.016	169.93	0.002	0.044	0.001	0.055	4.336	0.021
415 1	178.36	52.70	11.26	5.46	-0.116	0.006	-0.007	178.69	0.001	0.047	-0.011	0.069	4.333	-0.017
415 2	174.49	49.66	9.68	5.34	-0.121	-0.068	-0.013	174.75	0.001	0.042	0.003	0.059	4.335	-0.003
445 1	186.68	48.58	9.55	5.27	-0.115	-0.066	-0.008	186.90	-0.002	0.034	-0.012	0.049	4.305	-0.027
445 2	187.48	52.51	9.99	5.58	-0.134	-0.032	-0.011	187.73	0.001	0.038	0.002	0.052	4.312	-0.021
515 1	180.80	59.64	11.10	5.57	-0.108	0.056	-0.008	181.11	0.000	0.044	-0.010	0.065	4.334	0.027
515 2	173.91	58.84	9.90	5.53	-0.119	-0.054	-0.012	174.18	0.000	0.043	0.004	0.062	4.353	0.039
545 1	132.19	38.64	8.06	3.43	-0.055	-0.009	-0.010	132.42	0.000	0.048	-0.027	0.078	4.304	-0.012
545 2	132.94	45.35	7.90	4.16	-0.081	-0.064	-0.010	133.17	0.003	0.068	0.003	0.087	4.348	-0.005
615 1	139.56	47.53	8.61	4.04	-0.070	-0.086	-0.010	139.81	-0.002	0.042	-0.023	0.068	4.257	-0.051
615 2	130.49	45.10	7.93	4.16	-0.079	-0.113	-0.012	130.74	0.005	0.073	0.004	0.093	4.300	-0.049
730 1	213.14	67.49	14.09	7.12	-0.160	-0.126	-0.013	213.59	0.000	0.051	-0.011	0.077	4.300	0.030
730 2	200.72	70.53	13.80	7.52	-0.228	-0.169	-0.010	201.21	0.006	0.060	0.004	0.082	4.307	0.007
705 1	240.37	83.52	24.75	8.66	-0.239	-0.092	-0.026	241.51	0.003	0.059	-0.005	0.105	4.355	0.049
705 2	231.58	89.85	19.64	8.54	-0.301	-0.187	-0.015	232.37	0.009	0.073	0.007	0.106	4.338	0.027
800 1	195.30	197.67	62.23	26.89	-1.319	7.389	-0.317	211.70	0.245	0.370	0.346	0.664	5.162	0.457
800 2	210.53	185.89	29.84	26.40	-1.313	-1.916	0.114	212.77	0.236	0.364	0.336	0.179	4.535	-0.131
835 1	225.68	278.40	69.50	26.41	-1.382	9.537	-0.240	258.34	0.205	0.349	0.172	0.847	5.113	0.124
835 2	248.37	200.86	50.18	26.98	-1.419	3.939	-0.175	254.86	0.201	0.346	0.170	0.330	4.503	0.134
905 1	283.57	143.25	56.35	21.04	-1.053	-2.228	0.190	0.00	0.012	0.110	-0.008	0.128	4.383	-0.554
905 2	281.60	109.26	55.24	20.37	-0.989	0.115	-0.137	0.00	0.016	0.119	0.024	0.102	4.313	-0.031
935 1	298.08	127.92	80.61	20.98	-0.690	-1.297	-0.166	0.00	0.014	0.121	-0.002	0.129	4.418	0.032
935 2	298.15	110.63	64.19	21.32	-0.972	-0.936	-0.108	0.00	0.016	0.131	0.024	0.112	4.343	0.030
1005 1	325.96	110.61	75.12	23.12	-0.926	-0.632	0.013	0.00	0.010	0.112	-0.002	0.120	4.383	-0.035
1005 2	327.48	112.00	75.40	23.50	-1.117	-0.734	-0.008	0.00	0.014	0.123	0.016	0.115	4.302	-0.037
1040 1	328.26	115.14	77.58	22.62	-0.862	-0.035	0.004	0.00	0.010	0.105	-0.010	0.119	4.316	-0.064
1040 2	324.49	112.32	71.20	23.04	-1.056	-0.602	0.048	0.00	0.010	0.123	0.018	0.111	4.244	-0.060

TIME SITE	MEAN	USD	VSD	WSIP	RUM	REYNOLDS	RUV	RUV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	CM/SEC	WIND ST DEV	DEV	REYNOLDS	STRESSES	CM/SEC	CM/SEC	WIND	ELEV	ANGLE	AZIM	ANGLE	DIR	SHIFT
91368															
1130 1	328.19	110.35	96.35	22.72	-936	2.755	-0.94	0.00	0.12	.105	0.000	.146	4.279	-0.041	
1130 2	336.92	112.62	85.52	23.24	-1.148	.906	.083	0.00	.008	.111	.018	.128	4.192	-0.051	
1200 1	347.58	122.21	87.66	24.78	-998	-368	-0.217	0.00	.016	.125	.062	.129	4.352	.072	
1200 2	365.74	124.84	79.75	25.70	-1.330	-864	-0.193	0.00	.018	.126	.022	.121	4.273	.078	
1300 1	299.42	106.37	83.14	46.80	-1.464	.002	-0.126	310.63	.010	.174	.010	.280	4.212	-0.049	
1300 2	283.05	108.86	85.72	48.27	-2.133	-1.057	-0.030	295.51	.028	.202	.046	.306	4.235	-0.073	
1330 1	307.75	112.05	86.83	48.58	-1.771	.173	-0.142	319.59	.012	.173	.014	.284	4.358	.042	
1330 2	300.92	122.67	89.05	51.28	-2.787	-1.393	-0.166	313.66	.028	.203	.057	.305	4.282	.035	
1400 1	268.82	99.76	75.59	43.52	-1.520	-413	-0.020	279.04	.019	.188	.010	.293	4.403	.048	
1400 2	283.23	97.85	79.09	45.12	-2.355	-1.797	-0.253	274.65	.035	.204	.053	.304	4.355	.078	
1430 1	247.47	85.24	67.51	37.56	-1.135	-182	-0.032	256.55	.009	.173	-0.003	.280	4.222	-0.168	
1430 2	249.57	89.47	69.09	40.22	-1.545	-656	-0.172	258.94	.018	.190	.032	.285	4.162	-0.172	
1505 1	233.85	82.32	65.37	37.25	-1.093	.051	-0.122	242.62	.114	.177	-0.011	.279	4.262	.047	
1505 2	235.01	90.45	64.48	37.73	-1.307	-732	-0.084	233.69	.027	.194	.030	.285	4.224	.064	
1535 1	266.63	98.84	70.79	42.59	-1.360	.111	-0.113	275.79	.013	.178	.009	.271	4.311	.030	
1535 2	271.71	104.64	74.67	43.58	-1.835	-683	-0.294	275.80	.025	.198	.041	.285	4.296	.061	
1605 1	267.50	104.46	78.75	42.24	-1.344	.941	-0.096	278.28	.009	.188	-0.003	.288	4.338	.039	
1605 2	269.10	111.75	78.44	43.50	-1.777	.258	-0.857	279.86	.025	.187	.044	.291	4.338	.039	
1635 1	185.12	74.83	50.77	29.79	-765	-0.036	-0.050	191.71	.015	.181	-0.024	.278	4.285	-0.033	
1635 2	180.59	70.46	47.79	29.47	-5757	-8546	-0.405	186.66	.024	.185	.030	.268	4.316	-0.008	
1705 1	151.00	67.04	43.58	24.82	-467	-194	-0.017	156.15	.013	.190	.004	.277	4.215	.319	
1705 2	149.04	67.67	40.38	24.85	-514	.058	-0.225	154.41	.021	.187	.035	.282	4.250	-0.071	
1735 1	104.57	54.50	33.27	18.46	-200	-678	-0.007	109.27	.014	.202	.026	.333	4.093	-0.138	
1735 2	138.18	50.43	28.81	16.29	-174	-6510	-0.134	111.56	.006	.161	.012	.260	4.164	-0.063	
1805 1	100.55	29.24	24.41	14.51	-144	-078	-0.015	103.50	-0.005	.160	.005	.252	4.142	.070	
1805 2	101.48	30.47	23.04	14.34	-157	-119	-0.030	108.06	.006	.152	.016	.230	4.214	.046	
1905 1	121.03	46.33	30.91	18.67	-236	-008	0.000	124.82	0.000	.165	.011	.259	4.305	.157	
1905 2	126.65	46.23	32.75	19.76	-280	-252	-0.179	130.71	.016	.176	.036	.260	4.357	.123	
1935 1	89.72	33.97	22.79	13.53	-136	-086	.011	92.57	-0.003	.174	.011	.268	4.255	-0.050	
1935 2	94.34	33.23	23.21	13.50	-126	-220	-0.095	97.12	.004	.156	.013	.253	4.321	-0.013	
2005 1	74.75	22.44	17.96	8.95	-055	-633	-0.029	77.00	-0.013	.134	.015	.264	4.269	.009	
2005 2	82.87	24.44	17.76	10.01	-075	-104	-0.048	84.73	-0.010	.118	.022	.217	4.349	.019	
2035 1	59.08	44.35	18.38	10.25	-050	.010	-0.004	61.53	.145	.335	.152	.450	4.505	.100	
2035 2	63.37	39.27	17.67	10.41	-069	-035	-0.043	65.81	.014	.225	.061	.367	4.402	.015	
2110 1	71.16	51.70	21.11	12.44	-110	.255	-0.025	74.33	.120	.342	.193	.416	4.711	.166	
2110 2	103.31	34.37	22.54	13.59	-125	-174	-0.076	105.66	-0.001	.141	.006	.225	4.351	.003	

TIME SITE START	ETA		THET:		BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	MV LATENT HEAT TRANSCAL/(CM2-MIN).....	MW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED	
	RAD	DEG	RAD	DEG							VSC F	C PARTS PER 100.000
91368												
111130 1	.1608	.0001	0.0000	-4792	.1052	.0777 22.	.5450	0.0000	0.0000	200	242	240
111130 2	.1760	-.0056	0.0000	-5218	.0863	.0804 23.	.5230	-.2474	.4229	228	263	292
121200 1	-.2538	.0004	0.0000	-6655	.0623	.0288 22.	.5920	0.0000	0.0000	368	419	451
121200 2	-.2862	.0006	0.0000	-6584	.0938	.0809 23.	.5520	-.4945	-.1346	340	418	441
131300 1	.0490	-.0081	0.0000	-5304	.0634	.1746 26.	.6080	0.0000	0.0000	103	711	1432
131300 2	.0569	-.0014	0.0000	-6034	.0607	.1650 27.	.5890	-.2388	-.0638	611	2246	4828
141330 1	-.0434	-.0064	0.0000	-5222	.0677	.1501 26.	.5540	0.0000	0.0000	143	686	1641
141330 2	-.0515	-.0043	0.0000	-5993	.1352	.1596 27.	.5120	-.0699	-.4437	402	2271	5063
151400 1	-.0625	-.0060	0.0000	-2528	.0194	.0952 26.	.6305	0.0000	0.0000	669	1510	2980
151400 2	-.1057	.0036	0.0000	-3012	.0819	.0822 26.	.5810	-.1666	.0626	365	2390	5778
161430 1	.1647	-.0093	0.0000	-0607	.0099	.0216 25.	.3170	0.0000	0.0000	95	713	1776
161430 2	.1608	-.0076	0.0000	-0297	-.0125	.0150 26.	.2800	-.2428	-.0353	233	1753	3598
171505 1	-.0452	-.0050	0.0000	-2257	-.0089	.0361 26.	.3400	0.0000	0.0000	34	876	2064
171505 2	-.0813	-.0030	0.0000	-2580	-.0070	.0431 26.	.3110	.0060	.0635	273	2135	4044
181535 1	-.0322	-.0053	0.0000	-2567	.0004	.0606 26.	.3050	0.0000	0.0000	161	891	1746
181535 2	-.0748	-.0052	0.0000	-2977	.0113	.0616 27.	.2840	-.24015	.0710	676	2287	4546
191605 1	-.0331	-.0104	0.0000	-1894	.0201	.0314 26.	.3740	0.0000	0.0000	184	963	2357
191605 2	-.0438	.0034	0.0000	-3184	-.0050	.0449 26.	.3600	.5319	.1868	364	1528	4065
201635 1	.0267	-.0054	0.0000	.2708	-.0201	-.0394 25.	.4910	0.0000	0.0000	123	1135	3657
201635 2	-.0089	.0037	0.0000	.2789	-.0267	-.0316 25.	.4150	-.9035	.1466	169	1555	4230
211705 1	.0884	-.0074	0.0000	.4519	-.0791	-.0355 26.	.5980	0.0000	0.0000	282	1815	4528
211705 2	.0535	0.0000	0.0000	.4159	-.0273	-.0301 26.	.5490	-2.5699	.1667	287	1799	5078
221735 1	.0812	-.0082	0.0000	.4946	-.1347	-.0254 22.	-2.4070	0.0000	0.0000	1309	2911	8761
221735 2	.0292	-.0077	0.0000	.4554	-.0724	-.0252 23.	.6840	-1.8021	.3190	509	1286	3524
231805 1	-.0772	-.0184	0.0000	.1081	-.0050	-.0273 20.	.4870	0.0000	0.0000	97	938	3158
231805 2	-.0550	-.0061	0.0000	.1341	-.0082	-.0327 19.	.5620	-.0628	.0206	76	691	2061
241905 1	-.1607	-.0148	0.0000	.2800	.0091	-.0450 19.	.5750	0.0000	0.0000	130	929	3095
241905 2	-.1388	-.0002	0.0000	.2487	-.0036	-.0389 18.	.5170	-.2047	.0028	219	1447	3826
251935 1	.0405	-.0194	0.0000	.1066	-.0169	-.0385 14.	.5560	0.0000	0.0000	261	1741	5341
251935 2	-.0050	-.0060	0.0000	.1060	-.0189	-.0277 18.	.5290	.0705	.0286	181	1017	5604
262005 1	-.0147	-.0217	0.0000	.0826	-.0194	-.0137 18.	.5010	0.0000	0.0000	200	724	6080
262005 2	-.0230	-.0168	0.0000	.0990	-.0246	-.0185 17.	.5080	-.0257	-.0009	199	1927	4528
272035 1	0.0000	-.0130	0.0000	.3560	.0188	-.0156 17.	.7230	0.0000	0.0000	0	0	0
272035 2	-.0071	-.0074	0.0000	.3313	.0257	-.0102 17.	.6750	-.5308	-.0677	2881	5636	12990
282110 1	.0120	-.0142	0.0000	.4530	.0116	-.0244 17.	.8470	0.0000	0.0000	15779	22110	27972
282110 2	-.0180	-.0103	0.0000	.3229	-.0463	-.0233 16.	-.2870	-.2764	.0671	83	718	2198

TIME SITE	START	MEAN WIND	USD	VSD	WIND ST	DEV	MSD	RUM	REFVOLS	CM/SEC	RWV	HORIZ WIND	F	FSD	G	GSD	WIND DIR	WIND SHIFT
91368																		
212140	1	147.10	48.42	36.73	22.55		22.55	-0.350	-0.095	-0.045	151.55	-0.001	.164	.005	.251	4.328	-196	
212140	2	150.20	47.06	33.42	22.25		22.25	-0.435	-0.144	-0.287	153.93	.013	.165	.019	.229	4.396	.032	
22210	1	142.08	50.31	36.63	24.02		24.02	-0.450	-0.010	-0.012	146.83	.017	.187	.008	.269	4.339	.007	
22210	2	149.76	55.95	35.57	23.43		23.43	-0.482	-0.255	-0.193	153.99	.014	.178	.032	.251	4.394	0.000	
91463																		
1	1	147.67	55.61	38.61	24.01		24.01	-0.465	-0.090	.002	152.80	.008	.189	.015	.280	4.442	0.000	
2	2	149.07	56.86	39.17	24.95		24.95	-0.516	-0.155	-0.277	154.28	.016	.195	.038	.281	4.506	.198	
30	1	119.08	42.98	30.85	19.59		19.59	-0.271	-0.154	-0.005	123.16	.013	.185	.016	.278	4.439	-0.004	
30	2	215.25	47.56	32.03	19.64		19.64	-0.286	-0.311	-0.168	119.70	.024	.202	.036	.299	4.520	.015	
110	1	101.65	35.70	27.33	15.77		15.77	-0.156	-0.296	.038	113.89	-0.004	.152	.005	.248	4.388	.053	
110	2	105.09	36.15	25.26	15.72		15.72	-0.179	-0.285	-0.052	111.11	.010	.166	.002	.749	4.482	.118	
140	1	104.61	27.58	20.86	12.48		12.48	-0.131	-0.051	0.000	106.65	-0.009	.128	-0.08	.204	4.359	-0.017	
140	2	101.33	25.90	20.26	11.82		11.82	-0.121	-0.123	-0.055	103.37	.002	.129	.003	.207	4.472	-0.010	
240	1	79.37	44.53	19.77	11.83		11.83	-0.096	.162	-0.001	81.85	.056	.275	.118	.335	4.613	-0.080	
240	2	0.00	0.00	0.00	0.00		0.00	0.000	0.000	0.300	0.00	0.000	0.000	0.000	0.000	0.000	0.000	
335	1	123.65	36.94	28.27	18.05		18.05	-0.268	-0.020	-0.022	126.84	-0.002	.156	-0.01	.234	4.391	-0.218	
335	2	119.23	36.96	25.58	17.07		17.07	-0.232	-0.072	-0.112	122.09	.009	.165	.006	.233	4.503	.627	
405	1	93.07	33.10	22.16	13.44		13.44	-0.131	-0.067	.002	96.42	-0.001	.162	-0.02	.256	4.398	.018	
405	2	40.02	32.98	22.21	13.86		13.86	-0.161	-0.041	-0.095	93.09	.008	.176	-0.09	.274	4.514	.036	
530	1	0.00	0.00	0.00	0.00		0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	
530	2	81.21	43.83	30.97	16.36		16.36	-0.305	-0.831	.007	98.09	.028	.211	-0.01	.304	4.426	.516	
600	1	0.00	0.00	0.00	0.00		0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000	
600	2	161.01	56.20	39.58	26.36		26.36	-0.588	-0.339	-0.195	166.14	.015	.192	.027	.264	4.451	-0.003	
530	1	131.19	43.37	38.31	23.96		23.96	-0.455	.413	-0.194	146.37	.009	.194	.002	.276	4.283	-0.020	
530	2	149.01	53.00	37.44	25.17		25.17	-0.556	-0.299	-0.048	154.00	.015	.199	.023	.273	4.427	-0.020	
700	1	168.40	55.22	43.44	26.86		26.86	-0.524	-0.171	.002	174.16	.006	.183	.009	.275	4.264	-0.025	
700	2	164.20	58.11	45.59	27.69		27.69	-0.732	-0.132	-0.059	170.55	.021	.201	.022	.290	4.411	-0.014	
730	1	206.01	74.59	53.62	33.47		33.47	-0.798	-0.281	.024	212.47	.009	.182	.006	.268	4.277	.015	
730	2	208.94	76.76	53.03	34.80		34.80	-1.171	-0.414	-0.020	215.77	.022	.196	.030	.268	4.430	.011	
300	1	256.13	37.03	64.39	38.70		38.70	-1.175	.101	-0.010	264.30	.009	.171	-0.01	.265	4.297	.037	
800	2	246.18	90.14	62.07	40.12		40.12	-1.567	-0.518	-0.014	254.09	.024	.194	.044	.266	4.444	0.000	
835	1	259.27	95.04	60.05	39.37		39.37	-1.246	-0.104	.358	260.56	.015	.183	-0.024	.276	4.324	.040	
835	2	248.604	99.86	66.78	41.56		41.56	-1.754	-0.376	-0.110	251.59	.034	.199	.040	.283	4.447	.008	
905	1	250.09	90.84	68.66	41.20		41.20	-1.346	-0.328	.024	260.32	.021	.191	-0.010	.287	4.360	.021	
905	2	260.08	95.05	68.50	42.45		42.45	-1.685	-0.701	-0.074	270.00	.023	.193	.045	.272	4.486	.033	
935	1	276.14	95.34	72.45	43.19		43.19	-1.454	-0.387	-0.002	285.70	.018	.178	.004	.274	4.376	.002	
935	2	272.16	95.21	67.74	44.19		44.19	-1.902	-0.554	-0.068	280.85	.031	.190	.039	.264	4.478	-0.003	

TIME SITE START	ETA KAD	THETA RAD	RETA RAD	HU SENSIBLE CAL/(CM2-MIN).....	HV HEAT TRANS CAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANS CAL/(CM2-MIN).....	EV	EW	LIMITS EXCEEDED		
										VSQ	F	G
91368												
2140 1	-1537	-0.0149	0.0000	.2265	-.0077	-.0544 16.	0.0000	0.0000	0.0000	30	735	1972
2140 2	-0404	-0.0040	0.0000	.2150	-.0111	-.0542 17.	0.0000	0.0000	0.0000	55	915	1653
2210 1	-0098	-0.0033	0.0000	.2029	-.0029	-.0553 18.	0.0000	0.0000	0.0000	128	1460	3335
2210 2	-0062	-0.0068	0.0000	.2923	-.0113	-.0517 17.	0.0000	0.0000	0.0000	83	1301	2458
91468												
1	-1010	-0.0141	0.0000	.2536	-.0285	-.0639 17.	0.0000	0.0000	0.0000	275	1694	4104
2	-1215	-0.0069	0.0000	.2370	-.0133	-.0521 16.	0.0000	0.0000	0.0000	225	1989	4947
30 1	-0084	-0.0054	0.0000	.1833	-.0223	-.0485 16.	0.0000	0.0000	0.0000	185	1673	5000
30 2	-0412	-0.0024	0.0000	.2637	-.0386	-.0397 15.	0.0000	0.0000	0.0000	501	2833	6844
110 1	-0777	-0.0164	0.0000	.1743	-.0680	-.0404 15.	0.0000	0.0000	0.0000	138	729	2453
110 2	-1391	-0.0028	0.0000	.1693	-.0481	-.0314 15.	0.0000	0.0000	0.0000	111	1436	3326
140 1	-0156	-0.0184	0.0000	.0952	-.0081	-.0285 14.	0.0000	0.0000	0.0000	46	399	1511
140 2	-0012	-0.0074	0.0000	.0984	-.0130	-.0242 14.	0.0000	0.0000	0.0000	35	404	1137
240 1	-1772	-0.0131	0.0000	.1419	-.0054	-.0205 14.	0.0000	0.0000	0.0000	697	11557	16064
240 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0	0
335 1	-3223	-0.0165	0.0000	.1545	-.0031	-.0400 14.	0.0000	0.0000	0.0000	17	552	1820
335 2	-6383	-0.0074	0.0000	.1270	-.0051	-.0310 13.	0.0000	0.0000	0.0000	63	1078	2201
405 1	-0023	-0.0014	0.0000	.1023	-.0146	-.0274 14.	0.0000	0.0000	0.0000	524	1335	4463
405 2	-0038	-0.0007	0.0000	.1013	-.0093	-.0249 13.	0.0000	0.0000	0.0000	128	1405	4625
530 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0	0
530 2	-0397	-0.0077	0.0000	.1680	-.0722	-.0343 13.	0.0000	0.0000	0.0000	838	3514	7957
600 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0	0
600 2	-0009	-0.0008	0.0000	.1771	-.0037	-.0507 14.	0.0000	0.0000	0.0000	192	1742	3142
630 1	-0392	-0.0014	0.0000	.0054	-.0055	-.0026 15.	0.0000	0.0000	0.0000	167	1553	4373
630 2	0.0005	-0.0000	0.0000	.0074	-.0025	-.0051 14.	0.0000	0.0000	0.0000	58	2140	4155
700 1	-0196	-0.0134	0.0000	-.0073	.0143	-.0251 16.	0.0000	0.0000	0.0000	75	1251	3409
700 2	-0054	-0.0071	0.0000	-.0231	.0138	-.0212 16.	0.0000	0.0000	0.0000	203	2388	4294
730 1	-0227	-0.0095	0.0000	-.2628	.0133	-.0245 17.	0.0000	0.0000	0.0000	105	994	2453
730 2	-0204	-0.0040	0.0000	-.2708	.0090	-.0303 16.	0.0000	0.0000	0.0000	100	1918	3014
800 1	-0396	-0.0101	0.0000	-.2747	.0487	-.0605 21.	0.0000	0.0000	0.0000	328	902	2124
800 2	-0110	-0.0042	0.0000	-.2900	-.0268	-.0558 20.	0.0000	0.0000	0.0000	367	1620	3309
835 1	-0040	-0.0005	0.0000	-.2926	.0524	-.1114 23.	0.0000	0.0000	0.0000	229	1188	2620
835 2	-0015	-0.0004	0.0000	-.2976	.0106	-.1135 24.	0.0000	0.0000	0.0000	186	2027	3971
905 1	-0026	-0.0001	0.0000	-.4250	.0552	-.213 23.	0.0000	0.0000	0.0000	335	1491	2773
905 2	-0043	-0.0001	0.0000	-.4414	.0729	-.1171 24.	0.0000	0.0000	0.0000	167	1531	2880
935 1	-0089	-0.0017	0.0000	-.3802	.0605	-.1087 24.	0.0000	0.0000	0.0000	145	1005	2296
935 2	-0054	-0.0049	0.0000	-.4227	.0368	-.1177 25.	0.0000	0.0000	0.0000	177	1578	2540

TIME	SITE	MEAN WIND	USD	WIND ST	VSD	KSD	RUM REYNOLDS STRESS	RUV STRESS	RWV	HORIZ WIND	F ELEV	FSD ANGLE	G AZIM	GSD ANGLE	WIND DIP	WIND SLP
START						DYNES/CM2.....
91468																
10005	1	271.49	105.66	72.29	42.54	42.54	-1.529	0.102	0.000	0.000	0.024	0.000	-0.054	0.285	4.350	0.012
11005	2	0.00	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-0.010
10035	1	293.12	118.55	87.54	42.09	42.09	-1.886	0.139	-0.119	305.31	0.022	0.191	0.003	0.293	4.396	-0.010
11035	2	317.74	160.20	129.14	52.99	52.99	-0.698	9.728	-2.194	347.83	0.056	0.221	0.104	0.628	4.777	-0.143
11105	1	308.12	115.64	85.52	48.92	48.92	-1.896	-0.057	-0.124	319.55	0.019	0.181	0.008	0.282	4.413	-0.148
11105	2	364.25	124.77	108.51	54.93	54.93	-2.664	3.775	-0.529	380.60	0.028	0.163	0.053	0.312	4.672	0.155
12700	1	292.70	119.18	89.66	47.20	47.20	-1.824	0.454	-0.257	305.19	0.030	0.191	0.004	0.302	4.324	0.155
11200	2	357.41	127.95	104.60	55.16	55.16	-2.484	0.525	-0.094	371.69	0.036	0.176	0.030	0.254	4.508	-1.503
11230	1	294.79	117.13	87.11	48.60	48.60	-1.939	0.410	-0.104	306.71	0.022	0.132	0.003	0.289	4.354	0.031
11230	2	354.89	133.43	104.83	56.47	56.47	-3.052	0.714	-0.094	369.33	0.039	0.179	0.039	0.289	4.583	0.065
11110	1	372.35	99.09	77.88	44.79	44.79	-1.652	0.277	-0.077	283.11	0.025	0.184	0.005	0.295	4.323	0.030
11130	2	333.27	108.72	93.50	53.00	53.00	-2.639	0.394	-0.532	346.11	0.030	0.181	0.047	0.281	4.543	-0.043
11333	1	250.69	91.77	71.75	41.05	41.05	-1.341	-0.210	-0.059	260.60	0.021	0.183	0.003	0.293	4.267	-0.057
11335	2	301.66	98.36	93.13	46.65	46.65	-1.752	0.164	-0.588	315.35	0.017	0.171	0.055	0.302	4.454	-0.096
11400	1	254.98	96.97	76.47	40.69	40.69	-1.392	-0.109	-0.218	265.93	0.019	0.181	-0.010	0.302	4.283	0.029
11430	2	304.76	110.43	98.52	48.04	48.04	-2.076	-2.057	-0.635	320.11	0.026	0.185	0.036	0.322	4.501	0.065
11425	1	250.77	98.71	84.45	46.85	46.85	-1.743	-0.253	-0.189	302.59	0.018	0.177	0.001	0.289	4.289	-0.005
11425	2	330.39	112.74	100.42	54.90	54.90	-2.815	0.738	-0.117	353.97	0.032	0.179	0.033	0.294	4.454	-0.043
11500	1	303.05	102.80	87.42	47.83	47.83	-1.862	0.364	-0.128	319.88	0.013	0.169	0.014	0.278	4.232	-0.069
11500	2	384.41	109.87	102.53	52.55	52.55	-2.396	-0.054	-0.157	337.71	0.014	0.147	0.031	0.262	4.365	-0.089
11530	1	305.22	101.24	84.16	47.58	47.58	-1.705	0.533	-0.108	320.57	0.009	0.166	-0.003	0.270	4.248	0.035
11530	2	370.69	116.65	109.77	59.07	59.07	-2.594	-0.551	-1.702	349.35	0.006	0.159	0.050	0.251	4.488	0.060
11800	1	245.56	94.85	65.65	37.91	37.91	-1.274	-0.849	-0.015	253.75	0.018	0.171	-0.012	0.264	4.311	0.060
11800	2	303.33	105.86	89.13	51.60	51.60	-2.309	-2.084	1.633	316.53	0.013	0.184	0.048	0.281	4.430	0.053
11830	1	224.96	85.46	63.37	37.25	37.25	-1.013	0.166	-0.100	233.14	0.023	0.186	-0.016	0.277	4.309	0.003
11830	2	280.28	105.28	79.26	35.00	35.00	-1.288	-0.584	-1.300	250.76	0.015	0.157	0.034	0.282	4.395	-0.030
11700	1	190.44	70.87	49.70	30.34	30.34	-0.730	-0.240	-0.000	196.65	0.021	0.174	-0.039	0.264	4.261	-0.025
11700	2	241.55	79.54	64.94	25.30	25.30	-0.577	-1.972	-0.988	249.80	0.001	0.119	0.039	0.264	4.318	-0.082
11735	1	198.54	66.24	46.58	29.30	29.30	-0.700	0.049	-0.034	203.82	0.005	0.160	0.000	0.235	4.250	-0.052
11735	2	240.31	68.30	53.00	23.63	23.63	-0.467	-0.887	-0.493	246.12	0.006	0.109	0.036	0.224	4.240	-0.075
11835	1	150.91	52.42	36.30	22.89	22.89	-0.430	-0.184	-0.006	155.25	0.003	0.169	-0.009	0.251	4.208	-0.032
11835	2	181.85	54.85	41.52	18.14	18.14	-0.277	-0.615	-0.411	186.53	-0.001	0.116	0.029	0.233	4.130	-0.103
11835	1	115.15	33.37	27.97	17.35	17.35	-0.214	-0.082	-0.026	118.51	0.006	0.164	-0.012	0.247	4.171	-0.034
11835	2	152.29	40.04	30.46	13.63	13.63	-0.163	-0.428	-0.206	155.32	-0.010	0.100	0.022	0.204	4.049	-0.075
11905	1	123.09	39.66	30.18	19.08	19.08	-0.290	-0.218	-0.030	126.83	0.005	0.172	0.000	0.257	4.179	-0.005
11905	2	152.94	43.01	33.53	14.57	14.57	-0.173	-0.369	-0.260	156.44	-0.009	0.106	0.024	0.216	4.038	-0.013

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	EW LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED	
										VSO F	G
91468											
1005 1	-0.340	0.0000	0.0000	-0.3425	0.0744	1090 24.	0.0000	0.0000	0.0000	373	1492
1005 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1035 1	0.0608	-0.0264	0.0000	-0.6326	0.0388	1803 26.	0.0000	0.0000	0.0000	692	1623
1035 2	-0.6785	0.0129	0.0000	-0.8107	-0.0602	1841 26.	0.0000	-0.0217	-0.1392	3015	4799
1105 1	-0.0160	-0.0018	0.0000	-0.5956	0.0337	1490 26.	0.0000	0.0000	0.0000	319	1054
1105 2	0.1771	0.0086	0.0000	-0.5806	-0.0835	1626 26.	0.0000	-0.1322	-0.1361	69	663
1200 1	0.0842	0.0334	0.0000	-0.5774	0.0511	1568 26.	0.0000	0.0000	0.0000	827	1971
1200 2	1.5003	0.0154	0.0000	-0.6182	0.0923	1777 27.	0.0000	-0.2452	-0.1279	161	962
1230 1	-0.0286	0.0000	0.0000	-0.2735	0.1606	1275 25.	0.0000	0.0000	0.0000	248	1073
1230 2	-0.0643	0.0154	0.0000	-0.2750	0.1612	1360 26.	0.0000	-0.3203	-0.1681	169	1134
1310 1	0.0297	0.0254	0.0000	-0.4016	0.0348	1218 26.	0.0000	0.0000	0.0000	169	1123
1310 2	0.0484	0.0558	0.0000	-0.3619	0.0434	1185 27.	0.0000	-0.2122	-0.0911	339	1171
1335 1	0.0484	-0.0003	0.0000	-0.4385	0.0701	1197 26.	0.0000	0.0000	0.0000	212	1108
1335 2	0.0949	-0.0014	0.0000	-0.3402	0.0412	1042 27.	0.0000	-0.0770	-0.1015	116	802
1400 1	-0.0342	-0.0034	0.0000	-0.3605	-0.0409	1421 26.	0.0000	0.0000	0.0000	466	1269
1400 2	-0.0870	-0.0001	0.0000	-0.3910	-0.0591	1598 27.	0.0000	-0.3058	-0.1211	626	1451
1425 1	0.0040	-0.0017	0.0000	-0.3546	0.0280	1278 27.	0.0000	0.0000	0.0000	131	674
1425 2	0.0461	0.0094	0.0000	-0.4134	-0.0198	1550 28.	0.0000	-0.1233	-0.0012	65	1014
1450 1	0.0718	-0.0049	0.0000	-0.2358	0.0212	0896 27.	0.0000	0.0000	0.0000	126	518
1450 2	0.0898	-0.0009	0.0000	-0.2470	-0.0048	0921 28.	0.0000	-0.2448	-0.0027	24	233
1530 1	-0.0304	-0.0072	0.0000	-0.1624	0.0335	0523 26.	0.0000	0.0000	0.0000	11	406
1530 2	-0.0096	-0.0103	0.0000	-0.2114	0.0242	0532 28.	0.0000	-0.5840	-0.0992	100	603
1600 1	-0.0813	-0.0015	0.0000	-0.1116	0.2352	0151 28.	0.0000	0.0000	0.0000	76	754
1600 2	-0.0710	-0.0098	0.0000	-0.1000	0.2872	0186 29.	0.0000	-0.0033	-0.0809	192	1285
1630 1	-0.0053	0.0031	0.0000	-0.0460	0.0040	0026 28.	0.0000	0.0000	0.0000	321	1342
1630 2	0.0215	-0.0014	0.0000	-0.0347	0.0058	0055 29.	0.0000	-0.5081	-0.0367	348	1047
1700 1	0.0208	-0.0032	0.0000	0.2044	-0.0375	0348 27.	0.0000	0.0000	0.0000	185	1001
1700 2	0.0584	-0.0076	0.0000	0.2083	-0.1400	0381 28.	0.0000	-0.3327	-0.5569	21	253
1735 1	0.0543	-0.0097	0.0000	0.2903	0.0374	0619 24.	0.0000	0.0000	0.0000	40	526
1735 2	0.0604	-0.0131	0.0000	0.2267	-0.0351	0255 25.	0.0000	-0.4064	-0.1755	3	115
1835 1	0.0248	-0.0145	0.0000	0.3364	-0.0372	0541 23.	0.0000	0.0000	0.0000	107	889
1835 2	0.0866	-0.0094	0.0000	0.3101	-0.0815	0278 24.	0.0000	-0.6703	-0.1114	82	368
1835 1	0.0306	-0.0074	0.0000	0.0746	-0.0121	0323 24.	0.0000	0.0000	0.0000	13	669
1835 2	0.0604	-0.0137	0.0000	0.1307	-0.0282	0212 24.	0.0000	-0.1133	-0.0422	15	155
1905 1	-0.0076	-0.0124	0.0000	0.1984	-0.0339	0530 24.	0.0000	0.0000	0.0000	102	1135
1905 2	0.0006	-0.0156	0.0000	0.1644	-0.0404	0209 24.	0.0000	-0.0471	-0.0483	88	180

TIME SITE START	HEAV WIND	USD WIND ST DEV	VSD WIND ST DEV	RUM PEYNOLDS STRESSES	RUV	RUV STRESSES	HORIZ WIND CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD	WIND DIR RAD	WIND RAD
21468													
1810 2	122.55	37.29	28.83	17.55	-0.241	-0.075	-0.024	125.96	0.003	0.158	-0.004	244	4.172
1970 2	163.65	43.64	34.32	14.69	-0.141	-0.471	-0.275	167.34	-0.013	0.098	0.022	209	4.017
2000 1	142.74	41.44	35.30	22.37	-0.388	-0.090	0.023	147.15	0.009	0.174	0.039	258	4.193
2000 2	181.00	47.58	42.61	18.35	-0.165	-0.723	-0.482	185.88	-0.010	0.116	0.035	234	4.078
2030 1	115.66	31.85	25.01	15.87	-0.188	-0.018	-0.004	118.41	-0.003	0.148	-0.005	225	4.140
2030 2	151.86	35.29	29.60	12.79	-0.104	-0.359	-0.199	154.65	-0.016	0.092	0.028	195	3.052
2230 1	143.57	46.34	36.07	21.39	-0.382	0.040	-0.030	148.09	0.004	0.165	0.007	262	3.864
2230 2	172.40	47.50	38.10	18.10	-0.293	-0.335	-0.404	177.48	-0.001	0.112	0.023	217	4.030
2300 1	136.87	40.34	34.51	20.75	-0.316	0.032	-0.047	141.18	-0.007	0.161	-0.002	257	3.864
2300 2	142.82	40.45	36.79	15.37	-0.166	-0.411	-0.363	166.66	-0.012	0.102	0.027	223	3.963
2330 1	126.49	33.37	31.77	19.70	-0.322	-0.043	-0.006	130.57	0.011	0.178	-0.005	264	3.867
2330 2	160.99	45.54	40.81	14.98	-0.114	-0.532	-0.205	164.65	-0.014	0.101	0.026	217	3.958
21568													
1	144.48	43.42	36.03	22.02	-0.359	-0.029	-0.035	148.97	-0.002	0.169	-0.007	258	3.864
2	179.14	42.15	42.94	18.24	-0.195	-0.649	-0.427	184.07	-0.007	0.116	0.021	237	3.946
30 1	146.47	43.30	36.27	21.19	-0.365	0.023	-0.044	150.92	-0.001	0.159	-0.004	254	3.869
30 2	171.68	48.04	36.24	17.19	-0.228	-0.429	-0.402	181.67	-0.010	0.101	0.021	213	3.931
100 1	118.65	37.41	27.90	17.80	-0.257	0.014	-0.030	122.52	0.005	0.168	-0.017	266	3.869
100 2	150.66	44.31	32.05	14.36	-0.170	-0.288	-0.278	153.89	-0.010	0.105	0.011	209	3.850
130 1	122.30	31.99	31.08	18.66	-0.308	0.002	-0.013	126.26	0.003	0.169	-0.015	266	3.873
130 2	149.54	39.72	34.11	14.75	-0.165	-0.299	-0.303	153.35	-0.009	0.111	0.023	228	3.915
200 1	136.11	42.63	34.20	20.91	-0.346	0.054	-0.024	140.84	0.002	0.170	-0.008	261	3.875
200 2	164.86	45.56	37.98	15.45	-0.182	-0.322	-0.311	169.44	-0.005	0.104	0.016	210	3.788
230 1	109.43	37.27	28.49	17.12	-0.226	-0.044	-0.033	113.20	0.003	0.179	-0.014	276	3.878
230 2	144.16	39.43	29.60	13.18	-0.127	-0.167	-0.224	142.18	-0.012	0.099	0.019	209	3.823
300 1	98.15	31.30	25.62	24.33	-0.142	-0.028	-0.014	101.48	-0.003	0.161	-0.027	270	3.883
300 2	123.64	33.45	26.66	19.59	-0.078	-0.137	-0.154	126.08	-0.013	0.101	0.021	204	3.891
330 1	119.62	47.67	34.10	20.55	-0.364	0.068	-0.044	143.75	-0.001	0.163	-0.020	253	3.886
330 2	178.59	50.64	37.92	15.77	-0.237	-0.646	-0.295	182.47	-0.013	0.096	0.022	211	3.656
400 1	147.52	46.87	34.57	21.34	-0.330	0.027	-0.002	151.60	-0.004	0.167	-0.012	245	3.889
400 2	181.04	50.25	36.15	16.66	-0.291	-0.396	-0.318	184.59	-0.008	0.104	0.026	203	3.630
430 1	156.93	46.12	38.22	23.59	-0.451	0.044	-0.006	161.70	0.003	0.173	-0.014	254	3.693
430 2	192.03	49.58	41.30	18.39	-0.324	-0.424	-0.431	196.43	-0.006	0.102	0.023	218	3.664
500 1	162.55	51.63	39.57	24.38	-0.456	0.142	-0.062	167.36	0.005	0.167	-0.004	253	3.895
500 2	200.20	55.44	46.20	19.33	-0.276	-0.071	-0.522	205.54	-0.012	0.106	0.025	236	3.833
530 1	174.40	45.44	45.50	27.34	-0.599	0.089	-0.043	180.22	0.008	0.176	-0.001	267	3.895
530 2	213.25	60.07	55.45	23.22	-0.449	-0.508	-0.860	220.19	-0.009	0.121	0.038	256	3.874

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR T/MP	EU	EV	EW	LIMITS EXCEEDED
START	KAD	RAD	RAD	SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HEAT TRANS ...CAL/(CM2-MIN)...	MEAN ST DEV CENTIGRADE		...CAL/(CM2-MIN)...	HEAT TRANS ...CAL/(CM2-MIN)...		VSO F G PARTS PER 100,000
91468											
1930 1	-0.0010	-0.0111	0.0000	.1704	-0.0035	-0.0386 24.	.4400	0.0000	0.0000	0.0000	25 707 2355
1930 2	-0.0047	-0.0180	0.0000	.1681	-0.0271	-0.0197 24.	.3840	-0.1261	.0193	.0161	0 111 882
2000 1	-0.0139	-0.0091	0.0000	.2161	-0.0106	-0.0598 24.	.4610	0.0000	0.0000	0.0000	65 1186 2850
2000 2	-0.0625	-0.0152	0.0000	.1738	-0.0499	-0.0235 24.	.3920	-0.0244	.0211	.0193	3 113 1286
2030 1	-0.0387	-0.0139	0.0000	.1432	-0.0143	-0.0319 23.	.5210	0.0000	0.0000	0.0000	5 600 1760
2030 2	-0.0984	-0.0200	0.0000	.1435	-0.0558	-0.0189 24.	.4570	-0.0194	.1114	.0240	21 66 763
2230 1	-0.2918	-0.0137	0.0000	.1970	-0.0007	-0.0489 23.	.4000	0.0000	0.0000	0.0000	140 968 2454
2230 2	-0.0584	-0.0092	0.0000	.1550	-0.0170	-0.0248 23.	.3550	-0.0328	.0185	.0139	23 207 1001
2300 1	-0.0063	-0.0218	0.0000	.1547	-0.0042	-0.0429 22.	.4000	0.0000	0.0000	0.0000	50 609 1844
2300 2	-0.0281	-0.0174	0.0000	.1257	-0.0262	-0.0200 22.	.3350	-0.0227	.0150	.0156	0 41 1165
2330 1	-0.0094	-0.0042	0.0000	.2717	-0.0030	-0.0491 22.	.9220	0.0000	0.0000	0.0000	159 1584 3260
2330 2	-0.0130	-0.0173	0.0000	.2049	-0.0663	-0.0055 23.	.6840	-0.0332	.0286	.0083	4 94 1345
91568											
1	-0.0058	-0.0184	0.0000	.1669	-0.0075	-0.0413 24.	.3640	0.0000	0.0000	0.0000	90 957 2260
2	-0.0080	-0.0132	0.0000	.1636	-0.0050	-0.0731 23.	.3210	-0.0240	.0135	.0143	2 281 1389
30 1	-0.0030	-0.0167	0.0000	.1801	-0.0026	-0.0435 24.	.3670	0.0000	0.0000	0.0000	45 660 1782
30 2	-0.0030	-0.0163	0.0000	.1539	-0.0243	-0.0216 23.	.3170	-0.0205	.0108	.0140	0 34 861
100 1	-0.0131	-0.0114	0.0000	.1445	-0.0062	-0.0375 23.	.3980	0.0000	0.0000	0.0000	78 925 2996
100 2	-0.0547	-0.0167	0.0000	.1671	-0.0115	-0.0170 23.	.3690	-0.0731	-0.0077	.0138	24 169 872
130 1	-0.0021	-0.0146	0.0000	.1781	-0.0025	-0.0404 23.	.3940	0.0000	0.0000	0.0000	59 1099 2555
130 2	-0.0576	-0.0167	0.0000	.1340	-0.0081	-0.0184 23.	.3340	-0.0178	.0143	.0105	38 308 273
200 1	-0.0052	-0.0152	0.0000	.1417	-0.0049	-0.0397 23.	.3570	0.0000	0.0000	0.0000	47 990 2523
200 2	-0.0095	-0.0107	0.0000	.1152	-0.0024	-0.0202 22.	.3140	.0193	.0106	.0112	4 137 1112
230 1	-0.0149	-0.0157	0.0000	.1673	-0.0038	-0.0314 22.	.4050	0.0000	0.0000	0.0000	209 1538 3990
230 2	-0.0390	-0.0167	0.0000	.1555	-0.0049	-0.0143 22.	.3450	-0.0890	-0.0016	.0045	0 109 976
300 1	-0.0182	-0.0161	0.0000	.1186	-0.0026	-0.0240 22.	.3960	0.0000	0.0000	0.0000	13 862 3563
300 2	-0.0728	-0.0176	0.0000	.1149	-0.0059	-0.0121 22.	.3550	.0001	.0059	.0102	13 190 1111
330 1	-0.0056	-0.0174	0.0000	.1826	-0.0092	-0.0345 22.	.3950	0.0000	0.0000	0.0000	12 769 2116
330 2	-0.2217	-0.0194	0.0000	.1927	-0.0694	-0.0228 22.	.4180	-0.0551	.0827	.0184	0 92 489
400 1	-0.0067	-0.0194	0.0000	.1180	-0.0028	-0.0237 21.	.2440	0.0000	0.0000	0.0000	26 876 1791
400 2	-0.0209	-0.0163	0.0000	.1186	-0.0101	-0.0166 21.	.1860	.0875	-0.0124	.0093	25 209 771
430 1	-0.0072	-0.0171	0.0000	.1240	-0.0009	-0.0282 21.	.2380	0.0000	0.0000	0.0000	136 1131 2350
430 2	-0.0475	-0.0144	0.0000	.1090	-0.0105	-0.0185 21.	-.0760	.0108	.0057	.0108	40 165 984
500 1	-0.0140	-0.0119	0.0000	.1467	-0.0162	-0.0282 22.	.2670	0.0000	0.0000	0.0000	40 832 2002
500 2	-0.1700	-0.0186	0.0000	.1193	-0.0083	-0.0192 21.	.2260	.0169	.0130	.0102	39 111 887
530 1	-0.0030	-0.0104	0.0000	.1251	-0.0056	-0.0308 22.	.2220	0.0000	0.0000	0.0000	124 1053 2184
530 2	-0.0360	-0.0196	0.0000	.1278	-0.0067	-0.0251 21.	.2090	.0482	.0282	.0131	72 278 1541

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
START	RAD	RAD	RAD	SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HEAT TRANSCAL/(CM2-MIN).....	TRANSCAL/(CM2-MIN).....	MEAN ST DEV CENTIGRADE	LATENT HEAT TRANSCAL/(CM2-MIN).....	HEAT TRANSCAL/(CM2-MIN).....	TRANSCAL/(CM2-MIN).....	VSQ F PARTS PER 100,000
91568											
600 1	0.0086	-0.0194	0.0000	0.0886	-0.0016	-0.0207	22.	0.1970	0.0000	0.0000	171 938
600 2	-0.0057	-0.0002	0.0000	0.0869	-0.0033	-0.0195	21.	0.1560	-0.1097	-0.0610	27 519
630 1	0.0242	-0.0147	0.0000	0.0178	0.0024	-0.0007	23.	0.2400	0.0000	0.0000	137 1288
630 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0
700 1	0.0251	-0.0095	0.0000	-0.1378	0.0019	0.0312	23.	0.2900	0.0000	0.0000	366 1907
700 2	0.5106	-0.0300	0.0000	-0.1288	0.0214	0.0246	23.	0.3250	-0.0853	-0.0494	1486 5842
730 1	0.0466	-0.0185	0.0000	-0.1409	-0.0043	0.0621	24.	0.4430	0.0000	0.0000	299 1691
730 2	-0.1621	-0.0256	0.0000	-0.1762	-0.0496	0.0557	24.	0.4480	-0.2239	-0.1397	1001 5001
800 1	0.0345	-0.0117	0.0000	-0.4441	-0.0347	0.0890	26.	0.7430	0.0000	0.0000	814 2897
800 2	-0.0227	-0.0250	0.0000	-0.3862	0.0932	0.0855	25.	0.5870	-0.3928	-0.0642	1493 6644
930 1	0.0007	-0.0129	0.0000	-0.3712	0.0185	0.1242	24.	0.5850	0.0000	0.0000	232 1273
930 2	-0.1399	-0.0292	0.0000	-0.3115	-0.0313	0.1056	24.	0.5520	-0.5270	-0.1165	1054 4669
11200 1	-0.4450	-0.0074	0.0000	-2.2449	-1.2529	0.1270	25.	0.8080	0.0000	0.0000	27165 37812
11200 2	-0.3379	0.0025	0.0000	-1.9726	-0.8544	0.2400	27.	0.9590	-18.6285	-9.0759	28796 37799
11300 1	0.2668	-0.0116	0.0000	-0.7806	0.0039	0.2072	25.	0.6160	0.0000	0.0000	1040 2128
11300 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0
11330 1	-0.1052	-0.0049	0.0000	-0.4554	-0.0014	0.1460	24.	0.4820	0.0000	0.0000	5252 6488
11330 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0
11400 1	0.0261	-0.0141	0.0000	-0.6311	-0.0508	0.1609	25.	0.5250	0.0000	0.0000	4819 5718
11400 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0
11430 1	-0.5905	-0.0141	0.0000	-0.4801	-0.0007	0.1334	24.	0.4300	0.0000	0.0000	3216 4409
11430 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0

TIME SITE START	MEAN WIND	USD WIND ST DEV	VSD CM/SEC	RUM KEYNOLES STRESSES	RIV CM/SEC	RWV CM/SEC	MORIZ CM/SEC	F ELEV	FSD ANGLE	G AZIM	GSD ANGLE	WIND DIR	WIND RAD
91168													
30 1	107.08	39.07	33.50	18.53	-260	-0.23	0.000	112.28	-0.26	-186	-0.15	322	5.774
30 2	104.16	40.11	41.52	24.37	-615	-1.12	0.000	112.28	-0.71	-317	-0.40	367	5.999
715 1	126.73	43.80	41.49	22.51	-414	0.37	0.000	133.64	-0.43	-206	-0.14	356	5.244
715 2	126.72	43.75	24.49	27.37	-482	0.13	0.000	128.74	-0.55	-252	-0.02	149	5.728
740 1	144.91	46.15	48.69	25.45	-534	-0.34	0.000	153.15	-0.36	-195	-0.12	344	5.368
740 2	144.91	56.34	35.23	30.41	-748	0.18	0.000	148.48	-0.48	-244	-0.06	158	5.731
830 1	195.71	70.02	68.74	33.57	-889	-1.179	0.000	207.41	-0.37	-191	-0.23	350	5.410
830 2	195.69	75.89	47.10	41.36	-1480	-0.729	0.000	201.09	-0.50	-242	-0.00	188	5.750
900 1	166.97	64.65	69.08	25.12	-660	0.110	0.000	180.56	-0.42	-207	-0.27	416	5.271
900 2	166.95	60.16	51.86	35.85	-1007	0.055	0.000	173.77	-0.61	-244	-0.02	202	5.602
1000 1	211.22	74.80	76.00	36.47	-1047	-1.113	0.000	224.80	-0.36	-192	-0.36	366	5.460
1000 2	211.20	89.59	57.59	43.49	-1646	-0.348	0.000	218.32	-0.56	-235	-0.01	195	5.774
1135 1	224.74	86.67	77.67	37.24	-1086	-0.492	0.000	238.46	-0.34	-187	-0.34	368	5.418
1135 2	218.19	87.27	60.48	37.39	-1114	0.049	0.000	226.29	-0.44	-251	-0.01	287	5.742
1230 1	222.47	85.30	89.11	38.65	-1134	-1.873	0.000	240.66	-0.28	-190	-0.09	417	5.336
1230 2	228.02	89.87	80.35	37.72	-1247	-2.543	0.000	242.53	-0.42	-197	-0.08	379	5.645
1330 1	214.62	83.41	87.93	37.53	-1030	-0.318	0.000	232.19	-0.45	-199	-0.10	413	5.055
1330 2	210.34	85.27	75.26	37.57	-1396	-0.830	0.000	222.20	-0.64	-219	-0.10	325	5.355
1400 1	231.40	96.32	94.10	38.91	-1142	-1.970	0.000	249.46	-0.42	-200	-0.07	404	5.089
1400 2	226.65	90.14	77.96	38.15	-1350	-1.683	0.000	239.23	-0.51	-200	-0.07	340	5.408
1450 1	146.59	96.59	79.06	29.83	-842	-1.513	0.000	167.70	-0.96	-277	-0.17	756	4.580
1450 2	185.09	72.89	71.84	31.34	-840	-0.878	0.000	197.62	-0.39	-197	-0.04	361	5.088
1500 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1500 2	162.31	71.29	64.26	30.31	-828	-1.343	0.000	173.53	-0.57	-227	-0.05	366	5.136
1535 1	181.97	78.40	54.66	30.46	-768	-0.078	0.000	189.95	-0.47	-209	-0.02	331	4.868
1535 2	183.06	70.43	54.51	30.17	-784	-0.023	0.000	190.23	-0.34	-200	-0.06	274	5.100
1605 1	160.88	72.94	56.21	28.89	-700	-0.435	0.000	169.96	-0.49	-214	-0.08	372	4.845
1605 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1640 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1640 2	138.17	63.35	42.14	25.17	-563	-0.484	0.000	143.71	-0.43	-219	-0.08	274	4.875
1840 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1840 2	68.35	30.89	20.21	13.29	-114	-1.118	0.000	70.98	-0.18	-194	-0.14	287	5.074
91268													
710 1	111.84	46.69	34.16	20.26	-282	-0.066	0.000	117.11	-0.39	-233	-0.41	348	4.327
710 2	103.43	51.33	24.01	18.70	-371	-1.128	0.000	106.76	-0.95	-268	-0.239	392	3.870
740 1	103.83	51.23	39.79	21.03	-310	-1.118	0.000	110.86	-0.67	-272	-0.23	401	4.392
740 2	99.09	46.08	46.31	22.46	-368	-0.020	0.000	108.62	-0.56	-286	-0.13	449	4.128

TIME SITE	ETA	THETA	BETA	HU	HV	HW	AIR TEMP	EU	EV	EW	LIMITS EXCEEDED
STAR	RAD	RAD	RAD	SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HEAT TRANS ...CAL/(CM2-MIN)...	MEAN ST DEV CENTIGRADE		LATENT HEAT TRANS ...CAL/(CM2-MIN)...			VSO F G PARTS PER 100,000
91168											
30 1	.1740	.0074	.0720	.0693	-.0094	-.0222	5.	.2193	0.0000	0.0000	122 1377 2955
30 2	-.0050	.0227	-.0780	.0798	-.0031	-.0398	7.	.7290	0.0000	0.0000	124 9739 18350
715 1	1.2355	.0163	0.0000	-.0925	-.0221	.0576	10.	.5940	0.0000	0.0000	144 2347 4415
715 2	1.2838	.0156	-.1140	-.0865	.0040	.0553	9.	.5640	0.0000	0.0000	452 9216 43420
740 1	-.1229	.0131	.0300	-.1686	.0005	.0781	11.	.6250	0.0000	0.0000	14 1505 2826
740 2	-.0039	.0034	-.1470	-.2408	-.0025	.0784	11.	.5590	0.0000	0.0000	1392 10551 41401
830 1	-.0745	.0147	.0270	-.3946	.0735	.1214	13.	.6200	0.0000	0.0000	188 1499 1811
830 2	-.0282	.0106	-.0470	-.4164	-.0136	.1476	13.	.5930	-.1722	.2556	400 8468 41551
900 1	.1504	.0123	.0100	-.2895	-.1135	.1460	14.	.7290	0.0000	0.0000	891 2822 4077
900 2	.1558	.0184	-.0520	-.4346	-.1698	.1711	14.	.7740	0.0000	.2823	1706 11186 18228
1000 1	-.0388	.0129	.0210	-.4250	.0388	.1878	17.	.7500	0.0000	0.0000	193 1588 2243
1000 2	.0336	.0177	.0040	-.5811	.0423	.1911	16.	.7640	.4325	.2756	690 9275 42907
1135 1	.0389	.0107	.0190	-.1023	-.3052	.0427	18.	.2600	0.0000	0.0000	232 1462 2416
1135 2	.0311	.0074	-.0270	-.3589	-.0289	.1299	18.	.5740	.2958	.1931	665 1199 24523
1230 1	.0837	.0161	.0120	-.3380	-.1056	.1943	20.	.6030	0.0000	0.0000	250 1402 2235
1230 2	.0512	.0178	-.0210	-.3239	-.1550	.1716	21.	.7240	1.0575	.1481	140 297 20896
1330 1	.3016	.0224	.0050	-.3974	-.0796	.1686	21.	.6660	0.0000	0.0000	711 2076 3396
1330 2	.2757	.0241	.0130	-.4865	-.0111	.1687	22.	.6800	-.1007	.1986	1140 3847 29983
1400 1	-.0015	.0127	.0050	-.2881	-.0938	.0978	21.	.5890	0.0000	0.0000	1184 2661 5240
1400 2	-.0809	.0216	-.0090	-.2117	-.1819	.1024	22.	.6030	.1671	.0915	661 2420 24512
1430 1	.3008	.0214	.0220	-.0501	-.0740	.0476	21.	.4860	0.0000	0.0000	6275 10946 17270
1430 2	.3090	.0119	0.0000	-.0371	-.1193	.0353	22.	.4600	-1.1318	.1845	601 2315 25148
1500 1	0.0000	.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1500 2	-.0591	.0186	-.0250	-.2632	.0730	.0846	22.	.5710	.6339	-1.6485	1398 4140 29427
1535 1	-.1146	.0163	-.0240	-.1772	-.0122	.0322	21.	.3240	0.0000	0.0000	1155 3336 9789
1535 2	.0375	.0058	-.0250	-.1780	.0084	.0427	22.	.3530	.0793	-.5289	318 2101 22840
1605 1	.0091	.0184	-.0010	.1178	.0649	-.0021	21.	.4400	0.0000	0.0000	1123 3385 10065
1605 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1640 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1640 2	.1755	.0107	-.0150	-.0090	-.0030	.0022	22.	.1200	-.6660	.1034	644 3569 29006
1840 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.	0.0000	0.0000	0.0000	0 0 0
1840 2	-.9846	.0002	-.0850	.0622	-.0086	-.0297	18.	.4190	-.0900	.0002	561 2230 9667
91268											
710 1	-.6490	.0070	-.0290	-.0157	-.0406	.0329	13.	-1.0610	0.0000	0.0000	889 4334 9791
710 2	-.2066	.0224	-.0930	-.0543	-.0236	.0287	14.	.4610	-.0068	.0119	5957 10328 18673
740 1	-.0289	.0135	-.0130	-.1215	.0209	.0479	14.	.4130	0.0000	0.0000	2898 8340 14179
740 2	.0620	.0008	-.0150	-.0832	-.0161	.0497	15.	.3660	-.4152	-.0781	2700 9163 15479

TIME SITE	MEAN	USD	WSD	WSD	WSD	RUM	RUV	RMV	HORIZ	F	G	GSD	WIND	WIND
START	WIND	WIND	ST	DEV	SEC	REYNOLDS	STRESSES	CM/SEC	CM/SEC	ELEV	AZIM	ANGLE	DIR	SHIFT
	CM/SEC	CM/SEC	CM/SEC	CM/SEC	CM/SEC	DYNES/CM2	DYNES/CM2	DYNES/CM2	DYNES/CM2	ANGLE	ANGLE	ANGLE	ANGLE	ANGLE
91268														
810 1	93.96	51.80	37.24	19.12	-0.251	-0.375	0.000	101.08	0.079	0.296	-0.040	0.475	4.759	0.383
810 2	87.55	51.97	44.42	20.37	-0.308	-0.831	0.000	96.99	0.108	0.325	0.182	0.490	5.121	0.925
900 1	134.13	61.97	45.87	26.03	-0.553	-0.326	0.000	142.07	0.058	0.249	-0.170	0.388	5.010	0.381
900 2	133.93	60.34	38.97	24.97	-0.626	-0.494	0.000	139.90	0.081	0.248	-0.157	0.366	5.310	0.528
930 1	162.66	74.70	55.83	29.70	-0.699	-0.105	0.000	171.84	0.055	0.230	-0.025	0.364	4.956	-0.198
930 2	156.35	77.63	57.06	30.29	-0.951	-0.568	0.000	166.38	0.075	0.261	0.101	0.388	5.382	-0.186
1005 1	214.08	81.94	70.22	36.52	-1.061	-0.108	0.000	225.65	0.040	0.198	0.007	0.345	4.879	-0.110
1005 2	192.78	91.06	64.47	36.25	-1.136	-0.527	0.000	202.80	0.064	0.258	0.258	0.337	5.409	-0.131
1035 1	185.77	87.79	74.56	32.82	-0.777	-0.757	0.000	199.72	0.044	0.235	0.105	0.418	4.740	-0.237
1035 2	152.98	98.11	96.03	33.59	-0.998	-2.107	0.000	177.64	0.106	0.308	0.165	0.681	4.844	-0.472
1105 1	196.15	96.60	73.47	34.43	-0.936	-0.439	0.000	209.34	0.060	0.239	0.047	0.404	4.788	0.106
1105 2	180.21	102.31	64.94	32.99	-1.027	-1.027	0.000	191.30	0.100	0.278	-0.100	0.439	4.567	-0.012
1135 1	153.40	94.82	68.57	31.56	-0.824	-0.055	0.000	166.18	0.079	0.289	0.162	0.436	4.722	-0.181
1135 2	138.69	93.78	69.19	30.60	-0.662	-1.002	0.000	152.38	0.119	0.328	0.089	0.485	4.580	-0.176
1205 1	137.38	108.69	60.46	29.07	-0.614	0.107	0.000	147.40	0.162	0.351	0.212	0.419	4.873	0.100
1205 2	161.39	91.89	79.14	33.50	-1.039	-0.505	0.000	177.36	0.105	0.298	0.093	0.464	4.589	-0.422
1305 1	199.41	113.81	71.30	34.90	-0.840	0.580	0.000	210.97	0.066	0.277	0.207	0.365	4.426	-0.422
1305 2	179.55	104.00	75.01	37.54	-1.230	-0.118	0.000	192.76	0.097	0.305	0.291	0.393	4.499	-1.141
1335 1	174.72	83.03	65.42	32.50	-0.653	0.547	0.000	185.77	0.024	0.240	0.018	0.381	4.222	-0.014
1335 2	160.22	86.53	68.37	33.31	-0.890	-0.422	0.000	172.78	0.058	0.281	0.109	0.410	4.320	0.002
1430 1	201.76	86.17	61.15	34.32	-0.902	0.336	0.000	210.59	0.018	0.208	0.024	0.309	4.111	-0.118
1430 2	197.76	87.24	63.35	34.95	-1.262	-0.191	0.000	207.39	0.026	0.226	0.145	0.323	4.232	-0.123
1500 1	168.70	76.69	64.25	31.47	-0.693	0.244	0.000	179.84	0.035	0.234	0.026	0.375	4.201	0.089
1500 2	157.89	79.07	65.49	31.00	-0.896	0.025	0.000	169.72	0.063	0.263	0.252	0.390	4.392	0.053
1530 1	144.24	72.52	51.35	28.03	-0.607	0.230	0.000	152.85	0.057	0.262	0.057	0.372	4.155	-0.078
1530 2	141.48	73.53	53.16	28.15	-0.760	0.294	0.000	150.59	0.056	0.265	0.272	0.367	4.355	-0.057
1600 1	167.39	74.29	57.43	31.68	-0.628	0.387	0.000	176.74	0.031	0.233	0.028	0.353	4.206	0.080
1600 2	168.38	78.35	61.26	31.42	-0.914	-0.681	0.000	178.58	0.031	0.240	0.185	0.357	4.376	0.108
1630 1	147.30	57.29	44.95	25.71	-0.434	-0.404	0.000	154.09	0.014	0.207	0.014	0.320	4.191	-0.002
1630 2	133.03	55.63	48.04	26.08	-0.656	-0.241	0.000	141.09	0.059	0.250	0.179	0.355	4.336	-0.034
1710 1	106.03	40.08	29.83	18.27	-0.252	-0.090	0.000	110.20	0.008	0.196	0.009	0.293	4.104	-0.082
1710 2	95.61	42.89	29.19	18.27	-0.251	-0.380	0.000	99.67	0.020	0.244	0.346	0.292	4.367	-0.136
1740 1	73.94	21.67	16.68	9.41	-0.029	-0.089	0.000	75.66	-0.020	0.153	0.009	0.227	3.756	-0.348
1740 2	70.92	24.20	15.52	8.51	-0.049	0.050	0.000	72.42	0.014	0.199	0.077	0.210	3.972	-0.126
1805 1	76.02	16.79	14.18	7.37	-0.027	-0.019	0.000	77.34	-0.025	0.116	0.005	0.198	3.670	-0.081
1805 2	78.53	13.99	14.65	6.35	-0.017	-0.045	0.000	79.89	-0.023	0.088	0.052	0.190	3.534	0.007

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EV LATENT HEAT TRANSCAL/(CM2-MIN).....	EW LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED			
										VSO F	G PARTS PER 100,000		
91268													
810 1	-0.5043	0.0084	-0.0150	-0.1189	-0.0599	0.8007 16.	0.6680	0.0000	0.0000	0.0000	5758	11909	27059
810 2	-1.0694	0.0207	-0.0660	-0.0625	-0.1902	0.765 16.	0.6380	-0.9211	-0.7981	-0.1453	7775	16061	29855
900 1	-0.4253	0.0227	-0.0260	-0.2101	-0.0470	0.1218 20.	-0.4090	0.0000	0.0000	0.0000	1261	5640	16190
900 2	-0.5937	0.0312	-0.0630	-0.1825	-0.0679	0.1121 21.	0.7080	-0.2673	0.0435	-0.1754	2242	6940	10661
930 1	0.1067	0.0172	-0.0030	-0.2629	0.0162	0.1373 21.	0.6910	0.0000	0.0000	0.0000	2153	4688	9479
930 2	0.1390	0.0176	-0.0480	-0.3521	0.0245	0.1489 22.	0.7180	-0.4144	0.0168	-0.2240	3417	7980	17139
1005 1	0.1023	0.0149	-0.0280	-0.3840	-0.0937	0.1622 20.	0.5820	0.0000	0.0000	0.0000	362	1996	3429
1005 2	0.0891	0.0044	-0.0450	-0.3765	-0.0296	0.1454 22.	0.6350	0.0000	0.0000	0.0000	4805	7951	19855
1035 1	0.1951	0.0064	-0.0170	-0.4288	-0.0350	0.1459 23.	0.7170	0.0000	0.0000	0.0000	2114	5079	8763
1035 2	0.2741	0.0047	-0.0140	-0.5873	-0.0264	0.1439 24.	0.7380	1.4050	-0.2097	-0.2056	9430	14768	26125
1105 1	-0.1523	0.0117	-0.0420	-0.3917	-0.0813	0.1638 24.	0.7060	0.0000	0.0000	0.0000	3765	6197	12103
1105 2	-0.0906	0.0180	-0.0720	-0.4307	-0.0987	0.1445 24.	0.7130	-0.5743	-0.1118	-0.2328	8026	11696	18339
1135 1	0.1363	0.0057	-0.0350	-0.6614	-0.0107	0.1576 24.	0.8340	0.0000	0.0000	0.0000	5663	10858	16346
1135 2	0.0526	0.0051	-0.0500	-0.5387	-0.0043	0.1495 25.	0.8000	-0.1859	-0.0842	-0.2277	12575	17826	30444
1205 1	-0.1661	0.0071	-0.0190	-0.7367	-0.0488	0.0872 24.	0.8170	0.0000	0.0000	0.0000	17811	24367	33407
1205 2	-0.0912	0.0111	-0.0230	-0.3943	0.0434	0.1323 25.	0.7200	-0.3246	-0.2975	-0.2230	9015	13632	25252
13305 1	0.4231	-0.0107	-0.0390	-0.2796	0.0440	0.1258 25.	0.6240	0.0000	0.0000	0.0000	7944	10484	15254
13305 2	1.1036	0.0018	-0.0020	-0.3875	0.1127	0.1490 25.	0.6580	-0.5050	-0.2737	-0.1125	8508	13672	30045
13335 1	0.0046	-0.0136	-0.0420	-0.3392	0.0161	0.1250 25.	0.6840	0.0000	0.0000	0.0000	1584	5005	8061
13335 2	-0.0383	-0.0001	-0.0370	-0.3658	0.0381	0.1473 25.	0.7170	-0.0970	-0.1542	-0.1455	3120	9346	16356
14430 1	0.1135	-0.0091	-0.0270	-0.3143	0.0502	0.0987 15.	0.4980	0.0000	0.0000	0.0000	785	2638	4498
14430 2	0.1068	-0.0125	-0.0020	-0.3842	0.0119	0.1176 26.	0.5170	-0.2694	-0.1772	-0.1151	834	3926	9569
1500 1	-0.0952	0.0001	-0.0050	-0.2812	0.0165	0.0907 15.	0.4870	0.0000	0.0000	0.0000	957	4173	7660
1500 2	-0.0828	0.0024	-0.0020	-0.3063	0.0235	0.0920 26.	0.4630	-0.1604	0.2016	-0.1238	3864	7890	22456
1530 1	0.0585	0.0081	0.0060	-0.2124	0.0270	0.0727 15.	0.4310	0.0000	0.0000	0.0000	2892	7224	12557
1530 2	0.0431	0.0001	-0.0300	-0.2565	-0.0177	0.0736 26.	0.4230	-0.1770	0.0522	-0.1019	2561	7683	20981
1600 1	-0.1077	-0.0042	-0.0050	-0.246	0.0205	0.0414 15.	0.2670	0.0000	0.0000	0.0000	1541	4244	8461
1600 2	-0.1429	-0.0069	-0.0500	-0.1605	0.0297	0.0434 25.	0.2390	-0.3016	-0.0825	-0.1041	1025	4903	14392
1630 1	-0.0194	-0.0091	-0.0270	-0.0134	0.0051	-0.0025 15.	0.2110	0.0000	0.0000	0.0000	427	2389	5899
1630 2	0.0076	0.0140	-0.0460	-0.0538	0.0052	0.0108 25.	0.1490	-0.3391	0.1524	-0.155	1230	6230	16049
1710 1	0.0733	-0.0142	-0.0100	0.1122	-0.0462	-0.0270 23.	0.4200	0.0000	0.0000	0.0000	238	1889	5824
1710 2	0.0888	-0.0127	-0.0450	0.1232	-0.0423	-0.0175 23.	0.3450	-0.7071	0.4159	-0.0334	1366	4953	25416
1740 1	0.3343	-0.0314	0.0900	0.1403	-0.0323	-0.0083 21.	0.6810	0.0000	0.0000	0.0000	854	1677	4647
1740 2	1.4649	-0.0161	0.2220	-0.0256	0.0455	-0.0047 21.	0.6070	-0.0504	-0.2869	-0.2516	3357	4734	10711
1805 1	0.0791	-0.0314	0.0180	-0.0861	-0.0237	-0.0121 20.	-0.1730	0.0000	0.0000	0.0000	34	478	1892
1805 2	-0.0110	-0.0252	-0.0110	0.0523	-0.0439	-0.0089 20.	0.5270	0.0001	-0.0080	-0.100	0	57	503

TIME SITE START	MEAN WIND	USD WIND ST CM/SEC	VSD ST DEV	WSD DEV	RUM REYNOLDS STRESSES DYNES/CM2	RUV STRESSES DYNES/CM2	RWV CM/SEC	MORIZ WIND CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD	WIND DIR RAD	WIND SPEED RAD
91368														
145 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
145 2	111.41	42.59	8.75	2.66	-0.076	-0.316	0.000	111.80	0.001	-1.07	-1.87	-1.25	4.426	-0.030
215 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
215 2	168.01	53.31	8.86	4.52	-0.121	-0.099	0.000	168.23	0.002	0.44	-0.54	0.62	4.345	-0.057
245 1	162.69	44.43	9.37	4.37	-0.080	0.051	0.000	162.91	0.000	0.58	-0.13	0.57	4.334	-0.022
245 2	161.55	53.47	9.00	4.72	-0.109	0.023	0.000	161.75	0.002	0.42	-0.01	0.54	4.317	-0.022
315 1	146.87	32.50	7.42	3.09	-0.057	-0.014	0.000	147.03	-0.002	0.32	-0.11	0.54	4.328	-0.008
315 2	142.60	34.10	7.02	3.04	-0.073	0.002	0.000	142.73	-0.001	0.36	0.000	0.54	4.314	-0.004
335 1	167.12	41.34	8.90	4.66	-0.087	0.015	0.000	167.32	-0.001	0.34	-0.09	0.50	4.351	-0.022
335 2	169.70	46.20	9.44	5.29	-0.134	0.010	0.000	169.93	0.002	0.44	0.01	0.55	4.336	-0.021
415 1	178.36	52.70	11.30	5.43	-0.115	0.014	0.000	178.69	0.001	0.47	-0.11	0.65	4.333	-0.017
415 2	174.49	49.66	9.89	5.23	-0.131	-0.049	0.000	174.75	0.001	0.42	0.03	0.59	4.335	-0.003
445 1	186.68	48.58	9.66	5.22	-0.123	-0.052	0.000	186.90	-0.002	0.34	-0.12	0.49	4.305	-0.027
445 2	187.48	52.51	10.13	5.52	-0.139	-0.014	0.000	187.73	0.001	0.38	0.02	0.52	4.312	-0.021
515 1	180.80	59.68	11.15	5.54	-0.104	0.064	0.000	181.11	0.000	0.44	-0.10	0.65	4.334	-0.027
515 2	173.91	58.86	10.10	5.44	-0.127	-0.036	0.000	174.18	0.000	0.43	0.04	0.62	4.353	-0.039
545 1	132.19	38.64	8.24	3.26	-0.057	0.000	0.000	132.42	0.000	0.48	-0.27	0.78	4.304	-0.012
545 2	132.94	45.35	8.13	4.02	-0.093	-0.049	0.000	133.17	0.003	0.68	0.03	0.87	4.348	-0.005
615 1	139.56	47.53	8.77	3.92	-0.083	-0.075	0.000	139.81	-0.002	0.42	-0.23	0.68	4.257	-0.051
615 2	130.49	45.10	8.26	3.95	-0.103	-0.096	0.000	130.74	0.005	0.73	0.04	0.93	4.300	-0.049
630 1	213.14	67.49	14.16	7.08	-0.170	-0.113	0.000	213.59	0.000	0.51	-0.11	0.77	4.300	-0.030
630 2	200.72	70.53	13.85	7.50	-0.239	-0.154	0.000	201.21	0.006	0.60	0.04	0.82	4.307	-0.007
705 1	240.37	83.52	24.79	8.61	-0.243	-0.082	0.000	241.51	0.003	0.59	-0.05	1.05	4.355	-0.049
705 2	231.58	89.85	19.67	8.52	-0.309	-0.175	0.000	232.37	0.009	0.73	0.07	1.06	4.338	-0.027
800 1	195.30	197.67	62.62	26.57	-0.707	7.498	0.000	211.70	0.245	0.370	0.346	0.664	5.162	-0.457
800 2	210.93	185.89	32.41	27.29	-0.619	-2.392	0.000	212.77	0.236	0.364	0.336	0.179	4.535	-0.131
835 1	225.58	228.40	69.65	26.25	-0.921	9.604	0.000	258.34	0.205	0.349	0.172	0.847	5.113	-0.124
835 2	248.57	200.86	50.46	26.85	-1.101	4.054	0.000	254.86	0.201	0.346	0.170	0.330	4.503	-0.134
905 1	283.57	143.25	56.53	20.85	-0.925	-2.289	0.000	0.00	0.012	0.110	-0.08	0.128	4.383	-0.554
905 2	281.60	109.26	55.33	20.27	-0.984	-1.158	0.000	0.00	0.016	0.119	0.024	0.102	4.313	-0.031
935 1	298.08	107.92	80.65	20.91	-0.719	-1.282	0.000	0.00	0.014	0.121	-0.002	0.129	4.418	-0.032
935 2	298.15	110.63	64.23	21.28	-0.995	-0.912	0.000	0.00	0.016	0.131	0.024	0.112	4.343	-0.030
1005 1	325.96	110.61	75.12	23.12	-0.927	-0.630	0.000	0.00	0.010	0.121	-0.002	0.120	4.363	-0.035
1005 2	327.48	112.00	75.40	23.50	-1.118	-0.732	0.000	0.00	0.014	0.123	0.016	0.115	4.302	-0.037
1040 1	328.96	115.14	77.58	22.62	-0.862	-0.035	0.000	0.00	0.010	0.105	-0.010	0.119	4.316	-0.064
1040 2	324.49	112.33	71.21	23.03	-1.050	-0.611	0.000	0.00	0.010	0.123	0.018	0.111	4.244	-0.060

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN).....	HV LATENT HEAT TRANSCAL/(CM2-MIN).....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN).....	EM LATENT HEAT TRANSCAL/(CM2-MIN).....	LIMITS EXCEEDED VSO F PARTS PER 100.000
91368									
145 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0
145 2	-0.0047	-0.0114	-0.1580	0.0000	0.0000	0.0000	0.0000	0.0000	1709 1934 3054
215 1	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0
215 2	-0.0635	-0.0052	-0.2340	0.0000	0.0000	0.0000	0.0000	0.0000	115 138 243
245 1	-0.8613	-0.0028	0.0040	0.0093	-0.0002	-0.0012	0.0000	0.0000	91 108 140
245 2	-0.0229	-0.0021	-0.2000	0.0412	0.0004	-0.0025	0.0000	0.0000	43 89 91
315 1	0.0069	-0.0040	-0.1810	0.0482	-0.0005	-0.0046	0.0000	0.0000	15 33 75
315 2	0.0030	-0.0036	-0.2860	0.0669	0.0023	-0.0047	0.0000	0.0000	20 42 51
335 1	-0.0218	-0.0041	-0.1790	0.0661	-0.0011	-0.0039	0.0000	0.0000	5 7 13
335 2	-0.0222	-0.0020	-0.2270	0.1030	0.0021	-0.0091	0.0000	0.0000	46 70 81
415 1	0.0162	-0.0035	-0.0670	0.1380	-0.0055	-0.0102	0.0000	0.0000	110 157 211
415 2	0.0001	-0.0030	-0.1580	0.1444	-0.0045	-0.0101	0.0000	0.0000	59 67 83
445 1	0.0260	-0.0045	-0.1130	0.1595	-0.0001	-0.0112	0.0000	0.0000	7 12 23
445 2	0.0202	-0.0028	-0.1300	0.1735	0.0036	-0.0095	0.0000	0.0000	1 23 16
515 1	-0.0266	-0.0041	-0.0720	0.1885	-0.0005	-0.0105	0.0000	0.0000	86 115 182
515 2	-0.0420	-0.0037	-0.1500	0.1955	-0.0009	-0.0105	0.0000	0.0000	51 70 126
545 1	0.0102	-0.0040	-0.1530	0.0909	0.0001	-0.0068	0.0000	0.0000	200 222 411
545 2	-0.0027	-0.0043	-0.1790	0.1311	-0.0004	-0.0075	0.0000	0.0000	428 562 636
615 1	0.0469	-0.0051	-0.1430	0.1048	-0.0052	-0.0033	0.0000	0.0000	90 112 225
615 2	0.0390	-0.0031	-0.2120	0.1291	-0.0050	-0.0041	0.0000	0.0000	588 688 863
630 1	-0.0338	-0.0043	-0.0760	-0.0005	-0.0005	-0.0006	0.0000	0.0000	160 194 261
630 2	-0.0124	-0.0014	-0.0630	-0.0005	-0.0005	-0.0006	0.0000	0.0000	119 236 302
705 1	-0.0527	-0.0033	-0.0400	0.0167	-0.0806	-0.0048	0.0000	0.0000	252 326 379
705 2	-0.0364	-0.0014	-0.0410	-0.3277	0.0052	0.0063	0.0000	0.0000	421 577 745
800 1	-0.1247	0.0096	-0.0820	2.5939	0.4884	-0.0247	0.0000	0.0000	29899 37941 47940
800 2	-0.0069	0.0116	0.3470	-0.1193	0.0114	0.0089	0.0000	0.0000	27992 35931 43940
835 1	0.3226	0.0077	-0.0480	-0.9210	-0.1688	0.0205	0.0000	0.0000	24789 31362 33373
835 2	-0.1856	0.0081	-0.0800	-2.4914	-0.3585	0.0449	0.0000	0.0000	23094 30528 31573
905 1	1.1280	-0.0002	0.0570	-0.3512	0.1098	0.0368	0.0000	0.0000	210 257 292
905 2	-0.1013	-0.0006	-0.0430	-0.4457	0.0151	0.0449	0.0000	0.0000	200 283 302
935 1	-0.1306	0.0008	-0.0220	-0.3927	0.0474	0.0602	0.0000	0.0000	363 400 444
935 2	-0.1315	-0.0013	-0.0240	-0.4941	0.0665	0.0644	0.0000	0.0000	351 450 480
1005 1	-0.1066	-0.0019	-0.0020	-0.5009	0.1563	0.0709	0.0000	0.0000	230 284 294
1005 2	-0.1078	-0.0016	-0.0010	-0.5128	0.1516	0.0725	0.0000	0.0000	320 375 394
1040 1	-0.2126	-0.0006	0.0000	-0.5513	0.1579	0.0720	0.0000	0.0000	157 210 243
1040 2	-0.1832	-0.0056	0.0080	-0.5876	0.2086	0.0747	0.0000	0.0000	313 375 392

TIME SITE START	MEAN WIND	USD WIND ST CM/SEC	VSD WIND ST CM/SEC	WSD WIND ST CM/SEC	PUM REYNOLDS STRESSES	RUV REYNOLDS STRESSES	RWV REYNOLDS STRESSES	HORIZ CM/SEC	F ELEV RAD	FSD ANGLE RAD	G AZIM RAD	GSD ANGLE RAD	WIND DIR RAD	WIND SHIFT RAD
91368														
1130 1	328.19	110.35	96.36	22.71	-0.911	2.763	0.000	0.00	0.00	0.00	0.00	0.00	4.279	-0.041
1130 2	336.92	112.67	85.52	23.22	-1.158	.894	0.000	0.00	0.00	0.00	0.00	0.00	4.192	-0.051
1200 1	347.58	122.21	87.71	24.69	-1.00	-0.343	0.000	0.00	0.00	0.00	0.00	0.00	4.352	0.072
1200 2	365.74	126.84	79.81	25.62	-1.35	.827	0.000	0.00	0.00	0.00	0.00	0.00	4.273	0.078
1300 1	299.42	106.37	83.18	46.78	-1.664	.039	0.000	310.63	0.00	0.00	0.00	0.00	4.312	-0.049
1300 2	283.05	108.86	85.72	48.27	-2.138	-1.046	0.000	295.51	0.00	0.00	0.00	0.00	4.235	-0.073
1330 1	307.75	112.05	86.87	48.57	-1.767	.218	0.000	319.59	0.00	0.00	0.00	0.00	4.358	0.042
1330 2	300.92	122.67	89.10	51.27	-2.751	-1.455	0.000	313.66	0.00	0.00	0.00	0.00	4.282	0.035
1400 1	268.82	99.74	75.59	43.52	-1.535	-0.406	0.000	279.04	0.00	0.00	0.00	0.00	4.403	0.048
1400 2	253.23	97.84	79.26	45.06	-1.865	-1.899	0.000	274.65	0.00	0.00	0.00	0.00	4.355	0.078
1430 1	247.47	85.24	67.52	37.96	-1.137	-0.726	0.000	256.56	0.00	0.00	0.00	0.00	4.222	-0.168
1430 2	249.57	89.47	69.21	40.18	-1.515	-0.726	0.000	258.94	0.00	0.00	0.00	0.00	4.162	-0.172
1505 1	233.85	92.32	65.43	37.23	-1.092	.089	0.000	242.62	0.00	0.00	0.00	0.00	4.262	0.04
1505 2	235.01	90.44	64.52	37.72	-1.588	-0.774	0.000	243.69	0.00	0.00	0.00	0.00	4.224	0.061
1535 1	266.63	98.84	70.84	42.67	-1.357	.152	0.000	275.79	0.00	0.00	0.00	0.00	4.311	0.030
1535 2	265.71	104.68	74.94	43.49	-1.880	-0.563	0.000	275.80	0.00	0.00	0.00	0.00	4.296	0.061
1605 1	267.50	104.44	78.77	42.7	-1.326	.965	0.000	278.28	0.00	0.00	0.00	0.00	4.338	0.039
1605 2	259.10	111.72	80.17	42.6	-1.755	.544	0.000	279.86	0.00	0.00	0.00	0.00	4.338	0.039
1635 1	185.12	74.83	50.80	29.78	-0.766	-0.017	0.000	191.71	0.00	0.00	0.00	0.00	4.285	-0.033
1635 2	180.59	70.44	49.71	28.79	-0.876	-0.382	0.000	186.66	0.00	0.00	0.00	0.00	4.316	-0.008
1705 1	151.00	67.04	40.59	24.82	-0.470	-0.188	0.000	156.15	0.00	0.00	0.00	0.00	4.245	0.319
1705 2	149.04	67.67	41.41	24.53	-0.503	.148	0.000	154.41	0.00	0.00	0.00	0.00	4.250	-0.071
1735 1	104.57	54.30	33.27	18.46	-0.205	-0.676	0.000	109.27	0.00	0.00	0.00	0.00	4.093	-0.138
1735 2	109.18	50.43	29.67	15.89	-0.259	-0.478	0.000	111.56	0.00	0.00	0.00	0.00	4.164	-0.063
1805 1	100.55	29.24	24.43	14.51	-0.146	-0.073	0.000	103.50	0.00	0.00	0.00	0.00	4.142	0.070
1805 2	101.48	30.47	23.92	14.05	-0.183	-0.085	0.000	104.06	0.00	0.00	0.00	0.00	4.214	0.046
1905 1	121.03	46.33	30.91	18.67	-0.236	-0.008	0.000	124.82	0.00	0.00	0.00	0.00	4.305	0.157
1905 2	126.65	46.23	33.90	19.33	-0.331	-0.196	0.000	130.71	0.00	0.00	0.00	0.00	4.357	0.123
1935 1	89.72	33.97	22.81	13.52	-0.133	-0.090	0.000	92.57	0.00	0.00	0.00	0.00	4.255	-0.050
1935 2	94.34	33.23	24.07	13.21	-0.172	-0.194	0.000	97.12	0.00	0.00	0.00	0.00	4.321	-0.013
2005 1	74.75	22.46	17.98	8.94	-0.056	-0.031	0.000	77.00	0.00	0.00	0.00	0.00	4.269	0.005
2005 2	82.87	24.44	18.23	9.78	-0.093	-0.091	0.000	84.73	0.00	0.00	0.00	0.00	4.349	0.019
2035 1	59.08	44.34	18.38	10.24	-0.050	-0.011	0.000	61.53	0.00	0.00	0.00	0.00	4.505	0.100
2035 2	63.37	39.27	18.10	10.25	-0.075	-0.023	0.000	65.81	0.00	0.00	0.00	0.00	4.402	0.015
2110 1	71.16	51.70	21.20	12.43	-0.091	-0.263	0.000	74.33	0.00	0.00	0.00	0.00	4.711	0.166
2110 2	103.31	34.37	23.22	13.35	-0.158	-0.151	0.000	105.66	0.00	0.00	0.00	0.00	4.351	0.003

TIME SITE START	ETA RAD	META RAD	BETA RAD	HU SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HV HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANS ...CAL/(CM2-MIN)....	EV HEAT TRANS ...CAL/(CM2-MIN)....	EW HEAT TRANS ...CAL/(CM2-MIN)....	LIMITS EXCEEDED	
										VSO PARTS PER 130,000	F G
91368											
111130 1	1608	0001	-0080	-0492	1046	0787 22	5450	0.0000	0.0000	0.0000	201 242
111130 2	1760	-0036	0100	-05218	0071	0799 23	5230	-0.2474	0.240	0.1018	228 263
112100 1	-2336	0004	-0250	-0655	0600	0904 22	5920	0.0000	0.0000	0.0000	368 419
112100 2	-2862	0004	-0280	-0584	0515	0836 23	5920	-0.4945	-0.1369	0.0983	340 418
113100 1	0490	-0081	-0220	-05304	0595	1760 26	6090	0.0000	0.0000	0.0000	183 711
113100 2	0569	-0018	-0050	-06034	0740	1654 27	5890	-0.2388	-0.0614	0.1262	511 2246
113130 1	-0434	-0068	-0220	-05222	0572	1515 26	5840	0.0000	0.0000	0.0000	143 686
113130 2	-0515	-0043	0260	-05993	1393	1560 27	5120	-0.0699	0.068	0.1167	402 2271
114100 1	-0825	-0060	-0040	-05228	1190	0953 26	6300	0.0000	0.0000	0.0000	409 1510
114100 2	-1057	0036	0490	-03012	0060	0782 26	5910	-0.1686	0.0679	0.001	365 2390
114130 1	1647	-0094	-0080	-0607	0097	0217 25	3170	0.0000	0.0000	0.0000	95 713
114130 2	1608	-0076	0450	-00287	-0118	0156 26	2800	-0.4287	-0.0297	0.1264	233 1753
11505 1	-0452	-0050	-0350	-02257	-0101	0358 26	3400	0.0000	0.0000	0.0000	34 876
11505 2	-0813	-0030	0250	-02580	-0059	0632 26	3110	0.0060	0.0658	0.0882	279 2135
11535 1	-0322	-0054	-0290	-02567	-0013	0606 26	3050	0.0000	0.0000	0.0000	181 891
11535 2	-0748	-0057	-0060	-02917	0072	0623 27	2840	-0.4015	0.0642	0.1063	676 2287
11605 1	-0331	-0108	0180	-01894	-0195	0318 26	3720	0.0000	0.0000	0.0000	184 960
11605 2	-0436	0004	-0570	-03184	-0122	0441 26	3600	0.0000	0.0000	0.0000	364 1538
11635 1	0267	-0054	-0250	02708	-0301	0404 25	4910	0.0000	0.0000	0.0000	123 1135
11635 2	-0089	0037	-0130	02089	-0398	0374 25	4150	-0.0035	0.1253	0.1302	169 1555
11705 1	0884	-0074	-0130	04519	-00787	0366 24	5780	0.0000	0.0000	0.0000	282 1815
11705 2	0835	0000	-0120	04150	-00221	0348 24	5490	-0.0699	0.1617	0.0575	287 1799
11735 1	0812	-0087	-0070	04945	-00345	0264 23	4070	0.0000	0.0000	0.0000	1309 2911
11735 2	0792	-0077	-0120	04554	-00677	0376 23	3840	-0.1802	0.3150	0.0801	509 1288
11805 1	0772	-0184	-0330	1001	-0040	0074 20	4470	0.0000	0.0000	0.0000	97 938
11805 2	-0550	-0060	-0280	11341	-0013	0345 19	5620	-0.0628	0.0152	0.0297	76 691
11905 1	1607	-0148	0000	02803	0091	0450 17	5750	0.0000	0.0000	0.0000	130 929
11905 2	-1388	-0002	-0180	02407	0042	-00396 12	5170	-0.0947	-0.0004	0.0170	219 1447
11935 1	0405	-0194	0290	10366	-0180	0090 13	5560	0.0000	0.0000	0.0000	261 1741
11935 2	-0050	-0069	-0200	1065	-0132	0316 18	5290	0.0705	0.0293	0.0169	181 1017
12005 1	-0147	-0217	-0330	0846	-0190	0143 18	5010	0.0000	0.0000	0.0000	203 724
12005 2	-0288	-0168	-0170	0990	-0214	00228 17	5080	-0.0257	-0.0330	0.0127	0 199
12035 1	0000	-0130	-0170	0360	0190	0153 17	7230	0.0000	0.0000	0.0000	0 0
12035 2	-0071	-0078	-0170	0313	0284	0118 17	6750	0.0000	0.0000	0.0000	208 5636
12110 1	0120	-0142	-0720	0530	0134	0035 17	8470	0.0000	0.0000	0.0000	1579 22110
12110 2	-0180	-0103	-0180	0329	-0920	00320 18	-2870	-0.2764	-0.0653	0.0224	83 2198

TIME SITE	MEAN	USD	WSD	WSD	RUN	RUV	RUV	HORIZ	F	FSD	G	GSD	WIND	WIND
START	WIND	CM/SEC	CM/SEC	ST DEV	KEYNOLDS	STRESSES	CM/SEC	ELEV	ANGLE	ANGLE	AZIM	ANGLE	DIR	SHIFT
91368														
2140 1	147.10	40.42	35.79	22.53	-0.360	-0.039	0.000	151.55	-0.001	.164	.005	.251	4.328	-0.196
2140 2	150.20	47.09	34.83	21.95	-0.468	-0.046	0.000	153.93	.013	.165	.019	.229	4.396	.032
2210 1	142.08	50.31	36.64	24.02	-0.450	-0.004	0.000	146.83	.017	.187	.008	.269	4.339	.007
2210 2	149.76	55.94	36.81	20.16	-0.535	-0.156	0.000	153.09	.014	.178	.032	.251	4.344	0.000
91468														
1	147.67	55.41	38.61	24.01	-0.464	-0.091	0.000	152.80	.008	.189	.015	.280	4.442	0.000
2	149.07	56.85	40.89	24.43	-0.551	-0.031	0.000	154.28	.016	.195	.038	.281	4.508	.108
30 1	119.08	42.04	30.85	29.55	-0.272	-0.152	0.000	124.10	.013	.184	.016	.278	4.439	-0.004
30 2	115.25	47.94	33.14	19.25	-0.340	-0.253	0.000	119.70	.024	.202	.036	.299	4.520	.015
110 1	101.65	35.70	27.44	15.74	-0.137	-0.105	0.000	113.89	-0.004	.152	.005	.248	4.388	.053
110 2	108.09	36.15	25.83	15.56	-0.227	-0.255	0.000	111.11	.010	.166	.002	.249	4.482	.110
140 1	104.61	27.58	20.86	12.48	-0.131	-0.051	0.000	106.65	-0.009	.128	-0.008	.204	4.359	-0.017
140 2	101.33	25.50	20.72	11.63	-0.141	-0.104	0.000	102.37	.002	.129	.004	.207	4.472	-0.010
240 1	79.37	44.55	19.77	11.83	-0.095	-0.163	0.000	81.85	.036	.275	.118	.335	4.613	-0.080
240 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
335 1	123.65	36.93	28.31	18.05	-0.269	-0.029	0.000	124.84	-0.003	.156	-0.001	.234	4.351	-0.213
335 2	119.25	36.54	26.71	16.82	-0.259	-0.016	0.000	122.09	.009	.165	.006	.233	4.503	.627
405 1	93.07	33.10	22.15	13.44	-0.130	-0.048	0.000	96.42	-0.001	.162	-0.012	.256	4.398	.019
405 2	90.02	32.98	23.27	13.49	-0.171	-0.053	0.000	93.63	.008	.176	.019	.274	4.514	.036
530 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
530 2	82.21	43.83	30.97	16.35	-0.198	-0.833	0.000	92.09	.028	.211	-0.001	.304	4.426	.516
600 1	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
600 2	161.01	54.20	40.91	26.18	-0.646	-0.238	0.000	156.14	.015	.192	.027	.264	4.451	-0.033
630 1	131.19	48.37	39.24	23.69	-0.385	-0.401	0.000	146.27	.009	.194	.002	.276	4.283	-0.020
630 2	145.01	52.03	37.52	25.16	-0.572	-0.270	0.000	154.00	.015	.199	.023	.273	4.427	-0.020
700 1	186.40	55.22	47.44	26.86	-0.524	-0.172	0.000	174.16	.006	.183	.009	.275	4.264	-0.025
700 2	184.20	58.11	45.64	27.63	-0.757	-0.104	0.000	170.55	.021	.201	.022	.270	4.411	-0.014
730 1	204.01	74.59	53.63	33.47	-0.794	-0.290	0.000	212.87	.009	.182	.006	.268	4.277	.015
730 2	205.94	76.76	51.00	34.80	-1.176	-0.402	0.000	215.77	.022	.196	.030	.268	4.430	.011
800 1	206.13	87.93	64.39	35.70	-1.174	-0.105	0.000	204.30	.009	.171	-0.011	.263	4.297	.037
800 2	246.18	90.18	62.08	40.12	-1.569	-0.510	0.000	254.09	.024	.194	.044	.266	4.444	0.000
835 1	259.07	95.03	60.09	39.96	-1.243	-0.134	0.000	260.56	.015	.183	-0.024	.276	4.324	.040
835 2	248.04	99.86	66.84	41.54	-1.757	-0.317	0.000	251.59	.034	.199	.040	.288	4.447	.009
905 1	250.01	90.84	68.66	41.20	-1.345	-0.237	0.000	260.32	.021	.191	-0.010	.287	4.360	.021
905 2	260.08	95.05	68.52	42.44	-1.700	-0.665	0.000	270.00	.023	.190	.045	.272	4.486	.033
935 1	276.14	95.34	72.45	43.19	-1.454	-0.386	0.000	285.70	.018	.178	.004	.274	4.376	.004
935 2	272.16	95.21	57.76	44.19	-1.913	-0.493	0.000	280.85	.031	.190	.038	.264	4.478	-0.003

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HV LATENT HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CENTIGRADE	AIR TEMP ...CAL/(CM2-MIN)...	EJ LATENT HEAT TRANS ...CAL/(CM2-MIN)...	EV LATENT HEAT TRANS ...CAL/(CM2-MIN)...	EW LATENT HEAT TRANS ...CAL/(CM2-MIN)...	LIMITS EXCEEDED VSQ F G PARTS PER 100,000
91368											
2140 1	-0.1937	-0.0149	-0.0440	.2265	-.0012	-.0547 19.	.4680	0.0000	0.0000	0.0000	30 735 1972
2140 2	-0.0404	-0.0040	-0.2220	.2150	.0011	-.0567 17.	.4560	-.6254	.0175	.0077	55 915 1653
2210 1	-0.0098	-0.0031	-0.0130	.2029	-.0021	-.0553 18.	.4130	0.0000	0.0000	0.0000	128 1460 3335
2210 2	.0062	-0.0068	-0.2030	.2923	-.0006	-.0541 17.	.4510	-.1082	.0093	.0240	83 1301 2658
91468											
1	-0.1050	-0.0141	.0020	.2536	-.0037	-.0638 17.	.4940	0.0000	0.0000	0.0000	275 1694 4104
2	-0.1215	-0.0066	-.2230	.2370	-.0015	-.0551 16.	.4610	-.1788	.0516	.0291	225 1989 4947
30 1	-.0084	-.0054	-.0070	.1833	-.0215	-.0486 16.	.4580	0.0000	0.0000	0.0000	185 1673 5000
30 2	-.0012	.0024	-.1990	.2637	-.0306	-.0475 15.	.5240	-.1850	.0129	.0247	501 2833 6844
210 1	-.0775	-.0164	.0620	.1743	-.0706	-.0361 15.	.6230	0.0000	0.0000	0.0000	138 729 2453
110 2	-.1391	-.0020	-.1630	.1693	-.0430	-.0393 15.	.5910	-.0395	.0303	.0273	111 1436 3326
140 1	.0156	-.0184	0.0000	.0952	-.0082	-.0265 14.	.5580	0.0000	0.0000	0.0000	46 392 1511
140 2	.0012	-.0079	-.1610	.0984	-.0090	-.0263 14.	.5040	.0121	.0093	.0148	35 403 1137
240 1	.1772	-.0131	-.0050	.1419	.0055	-.0205 14.	.4980	0.0000	0.0000	0.0000	6997 11557 15054
240 2	0.0000	0.0000	0.0000	.0000	.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
335 1	.3223	-.0160	-.0400	.1545	-.0014	-.0401 14.	.4300	0.0000	0.0000	0.0000	17 552 1820
335 2	-.6386	-.0074	-.2270	.1370	.0020	-.0322 13.	.3480	-.0362	.0152	.0205	63 1078 2201
405 1	-.0023	-.0014	.0070	.1023	-.0148	-.0273 14.	.4240	0.0000	0.0000	0.0000	524 1335 4463
405 2	-.0038	-.0007	-.2310	.1013	-.0074	-.0271 13.	.0000	-.0081	.0052	.0176	128 1405 4625
530 1	0.0000	0.0000	0.0000	.0000	.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
530 2	-.0597	-.0007	.0080	.1680	-.0725	-.0337 13.	0.0000	-.1877	.1051	.0247	838 3514 7957
600 1	0.0000	0.0000	0.0000	.0000	.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0 0 0
600 2	-.0009	-.0008	-.1680	.1771	.0049	-.0513 14.	.3630	-.1129	-.0199	.0395	192 1742 3142
630 1	.0392	-.0014	-.1690	.0054	.0060	-.0017 15.	.2240	0.0000	0.0000	0.0000	167 1553 4373
630 2	.0005	-.0000	-.0520	.0074	-.0022	-.0053 14.	.2030	-.0709	.0108	.0434	58 2140 4135
700 1	.0156	-.0131	.0010	-.0073	.0143	.0250 16.	.3780	0.0000	0.0000	0.0000	75 1251 3409
700 2	.0054	-.0071	-.0370	-.0231	.0130	.0217 16.	.3270	-.3166	-.0222	.0782	203 2388 4294
730 1	-.0227	-.0094	.0110	-.2628	.0136	-.0244 17.	1.1200	0.0000	0.0000	0.0000	105 994 2453
730 2	-.0204	-.0040	-.0100	-.2708	.0087	.0304 16.	.9780	-1.1883	.1190	.0931	100 1918 3014
800 1	-.0396	-.0101	-.0030	-.2747	-.0489	.0601 21.	.4340	0.0000	0.0000	0.0000	328 902 2124
800 2	-.0110	-.0047	-.0050	-.2900	-.0272	.0357 20.	.4230	-.4098	.1444	.1703	367 1820 3303
835 1	-.0040	-.0004	.0210	-.2926	.0453	.1101 23.	.4600	0.0000	0.0000	0.0000	329 1488 2620
835 2	-.0015	.0004	-.0330	-.2976	.0668	.1138 24.	.4270	-.8206	.0412	.2055	186 2027 3471
905 1	-.0026	-.0001	.0060	-.4250	.0561	.1209 23.	.5140	0.0000	0.0000	0.0000	335 1491 2773
905 2	-.0043	-.0001	-.0210	-.4414	.0704	.1187 24.	.4890	-.4355	.0852	.1798	167 1531 2880
935 1	-.0089	-.0017	0.0040	-.3802	.0604	.1087 24.	.4570	0.0000	0.0000	0.0000	145 1005 2296
935 2	-.0054	.0049	-.0210	-.4227	.0343	.1185 25.	.4410	-.4996	-.0472	.2177	177 1578 2540

TIME SITE START	MEAN WIND	USD WIND ST DEV	VSD WIND ST DEV	RWD REYNOLDS STRESSES	RUV REYNOLDS STRESSES	RHW HORIZ WIND	F ELEV ANGLE	FSD ANGLE	G AZIM	GSD ANGLE	WIND DIR	WIND SHIFT		
91468														
1005 1	271.49	105.66	72.38	42.51	-1.325	.163	0.000	281.38	.024	.185	-.054	.289	4.350	.032
1005 2	3.0	0.30	0.00	0.00	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	-.010
1035 1	293.12	116.55	87.57	48.08	-1.883	.174	0.000	305.31	.022	.191	.003	.296	4.396	-.010
1035 2	317.74	160.20	131.10	51.11	.415	8.817	0.000	347.83	.056	.221	.104	.628	4.777	-.148
1105 1	308.12	113.64	85.55	48.91	-1.897	-.017	0.000	319.55	.019	.181	.008	.280	4.413	-.148
1105 2	364.23	124.77	108.75	54.79	-2.853	3.641	0.000	380.60	.028	.168	.053	.312	4.679	.155
1200 1	292.70	119.18	89.76	47.15	-1.807	.521	0.000	305.19	.030	.191	.004	.302	4.324	.155
1200 2	357.41	127.95	104.61	55.16	-2.478	.553	0.000	371.69	.036	.176	.030	.294	4.508	-1.503
1230 1	297.79	117.13	87.13	48.59	-1.932	.442	0.000	309.71	.022	.182	.003	.289	4.354	.031
1230 2	354.89	133.43	104.84	56.46	-3.059	.683	0.000	369.33	.039	.179	.039	.289	4.583	.065
1310 1	272.35	99.09	77.89	44.28	-1.647	.103	0.000	283.11	.025	.184	.005	.290	4.325	-.030
1310 2	335.27	108.77	93.93	52.83	-2.668	.199	0.000	346.11	.030	.161	.047	.281	4.543	-.048
1335 1	250.68	91.77	71.76	41.04	-1.344	-.190	0.000	260.60	.021	.183	.023	.291	4.267	-.057
1335 2	301.56	98.38	93.58	46.38	-1.764	.033	0.000	315.35	.017	.171	.055	.302	4.454	-.096
1400 1	254.98	96.97	76.59	40.63	-1.397	-.049	0.000	265.93	.019	.181	-.010	.302	4.283	.029
1400 2	304.76	110.43	98.95	47.76	-1.931	-2.204	0.000	320.11	.026	.185	.036	.322	4.501	.065
1425 1	290.77	98.71	84.53	46.82	-1.751	-.197	0.000	302.59	.018	.177	.001	.289	4.289	-.005
1425 2	339.39	112.74	100.43	54.90	-2.825	.699	0.000	353.97	.032	.179	.033	.298	4.454	-.043
1450 1	308.05	102.80	87.45	47.82	-1.855	.401	0.000	319.88	.013	.169	.014	.278	4.232	-.069
1450 2	384.41	109.47	107.55	52.54	-2.177	-.013	0.000	397.71	.014	.147	.031	.262	4.363	-.089
1530 1	309.52	101.28	84.22	47.55	-1.689	.582	0.000	320.53	.009	.166	-.005	.270	4.248	.035
1530 2	371.69	116.64	112.17	57.81	-2.508	-.959	0.000	389.35	.006	.169	.050	.291	4.388	.006
1600 1	245.46	94.84	65.66	37.91	-1.270	-.856	0.000	253.75	.018	.171	-.012	.284	4.311	.069
1600 2	304.38	105.86	93.34	49.57	-1.828	-2.617	0.000	316.53	.013	.184	.048	.281	4.439	.053
1630 1	224.96	85.46	63.43	37.23	-1.607	.202	0.000	233.14	.023	.136	-.016	.277	4.309	.003
1630 2	280.28	105.26	82.24	32.25	-1.404	-.329	0.000	299.76	.016	.152	.034	.282	4.395	-.030
1700 1	190.44	70.82	49.74	30.33	-.738	-.216	0.000	196.65	.021	.174	-.039	.264	4.261	-.025
1700 2	241.55	79.74	57.26	22.61	-.955	-1.962	0.000	249.80	.001	.119	.039	.264	4.318	-.082
1735 1	194.54	66.24	46.59	29.30	-.699	.065	0.000	203.82	.006	.160	0.000	.235	4.250	-.052
1735 2	240.31	69.20	55.71	21.90	-.571	-.780	0.000	246.12	-.006	.109	.036	.224	4.240	-.075
1835 1	150.91	52.42	36.39	22.89	-.431	-.181	0.000	155.25	.003	.162	-.009	.251	4.208	-.032
1835 2	181.85	54.84	43.50	16.17	-.414	-.544	0.000	186.53	-.001	.116	.029	.233	4.130	-.103
1835 1	115.15	33.37	28.02	17.64	-.211	-.092	0.000	118.51	.006	.164	-.012	.247	4.171	-.034
1835 2	152.29	40.04	31.77	12.63	-.254	-.393	0.000	155.32	-.010	.100	.022	.204	4.049	-.075
1905 1	123.02	39.69	30.23	19.07	-.280	-.232	0.000	126.83	.005	.172	0.000	.257	4.178	-.005
1905 2	152.94	43.01	35.04	13.07	-.253	-.332	0.000	155.44	-.009	.106	.024	.216	4.038	-.013

TIME SITE START	ETA RAD	THETA RAD	BETA RAD	HU SENSIBLE HEAT TRANSCAL/(CM2-MIN)....	HV LATENT HEAT TRANSCAL/(CM2-MIN)....	HW MEAN ST DEV CENTIGRADE	EU LATENT HEAT TRANSCAL/(CM2-MIN)....	EV LATENT HEAT TRANSCAL/(CM2-MIN)....	LIMITS EXCEEDED	
									VSO F	G PARTS PER 100.000
91463										
1005 1	-0.0340	0.0000	-0.0390	-0.3425	0.0000	0.0000	0.0000	0.0000	373	1482
1005 2	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0	0
1035 1	-0.0688	-0.0024	-0.0180	-0.6326	0.0355	0.0000	0.0000	0.0000	692	1625
1035 2	-0.0785	0.0129	-0.1260	-0.9107	-0.1837	0.0000	0.0000	-0.0394	3019	4999
1105 1	-0.0160	-0.0014	-0.0210	-0.5956	0.0506	0.0000	0.0000	0.0000	319	1054
1105 2	-0.1771	0.0089	0.0500	-0.5806	-0.0753	0.0000	0.0000	0.0000	69	665
1200 1	-0.0842	0.0039	-0.0360	-0.5774	0.0454	0.0000	0.0000	0.0000	827	1971
1200 2	0.0003	0.0154	-0.0090	-0.6182	0.0905	0.0000	0.0000	0.0000	161	962
1230 1	-0.0286	0.0009	-0.0160	-0.2735	0.1585	0.0000	0.0000	0.0000	248	1073
1230 2	-0.0643	0.0154	0.0100	-0.2750	0.1625	0.0000	0.0000	0.0000	169	1134
1310 1	-0.0297	0.0029	-0.0150	-0.4016	0.0520	0.0000	0.0000	0.0000	169	1123
1310 2	-0.0484	0.0038	0.0730	-0.3619	0.0521	0.0000	0.0000	0.0000	349	1171
1335 1	-0.0484	-0.0001	-0.0140	-0.4385	0.0684	0.0000	0.0000	0.0000	212	1108
1335 2	-0.0949	0.0014	0.0740	-0.3402	0.0489	0.0000	0.0000	0.0000	116	802
1400 1	-0.0342	-0.0034	-0.0430	-0.3605	-0.0671	0.0000	0.0000	0.0000	466	1269
1400 2	-0.0870	-0.0001	0.0700	-0.3910	-0.0477	0.0000	0.0000	0.0000	626	1451
1425 1	-0.0400	-0.0017	-0.0310	-0.3546	0.0239	0.0000	0.0000	0.0000	131	674
1425 2	-0.0461	0.0098	0.0130	-0.4134	-0.0177	0.0000	0.0000	0.0000	65	1014
1450 1	-0.0718	-0.0049	-0.0190	-0.2858	0.0194	0.0000	0.0000	0.0000	136	518
1450 2	-0.0898	-0.0009	-0.0160	-0.2470	-0.0064	0.0000	0.0000	0.0000	24	233
1530 1	-0.0304	-0.0072	-0.0290	-0.1624	0.0320	0.0000	0.0000	0.0000	11	406
1530 2	-0.0096	-0.0109	0.1560	-0.2114	0.0326	0.0000	0.0000	0.0000	100	603
1600 1	-0.0813	-0.0019	0.0040	-0.1116	0.2153	0.0000	0.0000	0.0000	76	754
1600 2	-0.0710	-0.0098	0.2250	-0.1080	0.2915	0.0000	0.0000	0.0000	192	1285
1630 1	-0.0053	0.0031	-0.0350	-0.0460	0.0043	0.0000	0.0000	0.0000	321	1342
1630 2	-0.0215	-0.0019	-0.1950	-0.0347	0.0049	0.0000	0.0000	0.0000	348	1047
1700 1	-0.0208	0.0032	-0.0320	0.2044	-0.0564	0.0000	0.0000	0.0000	185	1001
1700 2	-0.0584	-0.0079	-0.1890	0.2083	-0.1565	0.0000	0.0000	0.0000	21	253
1735 1	-0.0543	-0.0097	-0.0210	0.2905	0.0092	0.0000	0.0000	0.0000	40	526
1735 2	-0.0604	-0.0131	-0.2250	0.2267	-0.0475	0.0000	0.0000	0.0000	3	115
1835 1	-0.0248	-0.0144	-0.0060	0.3364	-0.0569	0.0000	0.0000	0.0000	107	689
1835 2	-0.0866	-0.0094	-0.2160	0.3101	-0.0753	0.0000	0.0000	0.0000	82	368
1835 1	-0.0306	-0.0076	0.0460	0.0746	-0.0136	0.0000	0.0000	0.0000	13	669
1835 2	-0.0604	-0.0157	-0.2080	0.1307	-0.0237	0.0000	0.0000	0.0000	15	155
1905 1	-0.0076	-0.0126	0.0460	0.1984	-0.0364	0.0000	0.0000	0.0000	102	1135
1905 2	-0.0006	-0.0156	-0.2120	0.1644	-0.0359	0.0000	0.0000	0.0000	88	180

TIME SITE	ETA	THETA	BETA	HU	MV	HW	AIR TEMP	EU	EV	EV	EV	LIMITS EXCEEDED
START	RAD	RAD	RAD	SENSIBLE HEAT TRANS ...CAL/(CM2-HR)...	HEAT TRANS ...CAL/(CM2-HR)...	MEAN ST DEV CENTIGRADE		LATENT HEAT TRANS ...CAL/(CM2-MIN)...				VSO F G PARTS PER 100,000
91468												
1930 1	-0.0010	-0.1111	-0.0380	.1704	-0.0020	-0.0387 24.	.4400	0.0000	0.0000	0.0000	0.0000	25 707 2355
1930 2	-0.0047	-0.0180	-0.2130	.1681	-0.0229	-0.0256 24.	.3840	-0.1261	-0.0159	-0.0203	-0.0203	0 111 882
2000 1	-0.0139	-0.0091	-0.0260	.2161	-0.0122	-0.0585 24.	.4610	0.0000	0.0000	0.0000	0.0000	65 1186 2950
2000 2	-0.0625	-0.0152	-0.2350	.1738	-0.0442	-0.0355 24.	.3920	-0.0244	-0.0164	-0.0244	-0.0244	3 113 1286
2030 1	-0.0387	-0.0139	-0.0100	.1432	-0.0140	-0.0321 24.	.5210	0.0000	0.0000	0.0000	0.0000	5 500 1760
2030 2	-0.0984	-0.0201	-0.2080	.1434	-0.0518	-0.0108 24.	.4570	-0.0194	-0.1063	-0.0476	-0.0476	21 66 763
2230 1	-0.2918	-0.0137	-0.0290	.1970	-0.0007	-0.0490 23.	.4000	0.0000	0.0000	0.0000	0.0000	140 968 2454
2230 2	-0.0584	-0.0092	-0.2530	.1550	-0.0106	-0.0292 23.	.3550	-0.0328	-0.0148	-0.0187	-0.0187	23 207 1001
2300 1	-0.0063	-0.0218	-0.0510	.1547	-0.0065	-0.0421 22.	.4000	0.0000	0.0000	0.0000	0.0000	50 805 1843
2300 2	-0.0281	-0.0174	-0.2380	.1257	-0.0213	-0.0263 22.	.3350	-0.0227	-0.0112	-0.0192	-0.0192	0 41 1163
2330 1	-0.0094	-0.0092	-0.0080	.2717	-0.0034	-0.0401 22.	.9220	0.0000	0.0000	0.0000	0.0000	159 1584 3260
2330 2	-0.0130	-0.0173	-0.2260	.2049	-0.0651	-0.0206 23.	.6840	-0.0332	-0.0267	-0.0169	-0.0169	4 34 1345
91568												
1	-0.0558	-0.0184	-0.0360	.1669	-0.0060	-0.0416 24.	.3640	0.0000	0.0000	0.0000	0.0000	90 957 2260
2	-0.0080	-0.0132	-0.2100	.1636	-0.0001	-0.0242 23.	.3210	-0.0240	-0.0104	-0.0172	-0.0172	2 281 1389
30 1	-0.0030	-0.0167	-0.0420	.1801	-0.0045	-0.0434 24.	.4470	0.0000	0.0000	0.0000	0.0000	45 660 1782
30 2	-0.0530	-0.0163	-0.2450	.1539	-0.0189	-0.0278 23.	.3170	-0.0205	-0.0073	-0.0167	-0.0167	0 34 861
100 1	-0.0131	-0.0115	-0.0430	.1445	-0.0078	-0.0372 23.	.3980	0.0000	0.0000	0.0000	0.0000	78 925 2996
100 2	-0.0547	-0.0167	-0.2430	.1671	-0.0073	-0.0198 23.	.3690	-0.0731	-0.0111	-0.0119	-0.0119	24 169 872
130 1	-0.0021	-0.0146	-0.0180	.1781	-0.0033	-0.0404 23.	.3940	0.0000	0.0000	0.0000	0.0000	59 1099 2555
130 2	-0.0576	-0.0167	-0.2330	.1340	-0.0037	-0.0203 23.	.3340	-0.0178	-0.0118	-0.0138	-0.0138	38 308 1273
200 1	-0.0052	-0.0152	-0.0270	.1417	-0.0060	-0.0396 23.	.3570	0.0000	0.0000	0.0000	0.0000	47 990 2523
200 2	-0.0095	-0.0107	-0.2300	.1152	-0.0022	-0.0208 22.	.3140	-0.0193	-0.0080	-0.0137	-0.0137	4 137 1112
230 1	-0.0149	-0.0157	-0.0530	.1673	-0.0021	-0.0316 22.	.4050	0.0000	0.0000	0.0000	0.0000	205 1538 3990
230 2	-0.0390	-0.0167	-0.2310	.1555	-0.0083	-0.0132 22.	.3450	-0.0890	-0.0627	-0.0041	-0.0041	5 109 976
300 1	-0.0182	-0.0161	-0.0260	.1186	-0.0019	-0.0241 22.	.3960	0.0000	0.0000	0.0000	0.0000	13 862 3563
300 2	-0.0728	-0.0176	-0.2300	.1169	-0.0031	-0.0135 22.	.3550	-0.0001	-0.0035	-0.0115	-0.0115	13 190 1111
330 1	-0.0056	-0.0175	-0.0490	.1826	-0.0109	-0.0330 22.	.3950	0.0000	0.0000	0.0000	0.0000	12 762 2116
330 2	-0.0217	-0.0194	-0.1890	.1927	-0.0650	-0.0361 22.	.4180	-0.0551	-0.0792	-0.0342	-0.0342	0 92 489
400 1	-0.0067	-0.0194	-0.0030	.1180	-0.0028	-0.0237 21.	.2840	0.0000	0.0000	0.0000	0.0000	26 876 1791
400 2	-0.0209	-0.0163	-0.2260	.1186	-0.0063	-0.0190 21.	.1860	-0.0875	-0.0145	-0.064	-0.064	7 202 771
430 1	-0.0072	-0.0171	-0.0060	.1240	-0.0011	-0.0287 21.	.2380	0.0000	0.0000	0.0000	0.0000	136 1131 2350
430 2	-0.0475	-0.0144	-0.2300	.1090	-0.0062	-0.0209 21.	-0.0530	-0.0108	-0.0031	-0.0122	-0.0122	40 165 984
500 1	-0.0140	-0.0119	-0.0530	.1467	-0.0177	-0.0273 22.	.2870	0.0000	0.0000	0.0000	0.0000	40 832 2002
500 2	-0.1700	-0.0186	-0.2180	.1193	-0.0126	-0.0174 21.	.2260	-0.0169	-0.0108	-0.015	-0.015	39 111 887
530 1	-0.0030	-0.0108	-0.0270	.1251	-0.0054	-0.0306 22.	.2320	0.0000	0.0000	0.0000	0.0000	124 1053 2184
530 2	-0.0360	-0.0196	-0.2430	.1278	-0.0130	-0.0235 21.	.2050	-0.0482	-0.0250	-0.0201	-0.0201	72 278 1542

TIME SITE	MEAN WIND	USD	WIND ST DEV	WSD	RUM REYNOLDS STRESSES	RUV STRESSES	PWV	HORIZ WIND	F ELEV	FSD ANGLE	G AZIM	GSD ANGLE	WIND DIR	WIND SHIFT
STAR	CH/SEC				DYNES/CM2			CM/SEC	RAD	RAD	RAD	RAD	RAD	RAD
91568														
600 1	182.91	60.52	46.43	27.67	-579	.027	0.000	188.82	-0.02	.172	.004	.265	3.889	-0.10
600 2	212.64	65.72	51.15	25.08	-837	-.418	0.000	218.04	.014	.141	.020	.234	3.851	-0.06
630 1	190.35	67.69	48.89	29.45	-789	.180	0.000	196.82	.008	.181	.010	.269	3.872	-0.22
630 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	-0.23
700 1	182.09	69.88	51.94	29.78	-794	.124	0.000	189.63	.018	.196	.005	.307	3.838	-0.30
700 2	146.61	66.89	49.33	28.74	-868	-.146	0.000	194.35	.020	.255	.041	.150	3.785	-0.524
730 1	194.82	71.26	51.80	31.33	-716	.136	0.000	201.76	.004	.190	.010	.294	3.794	-0.48
730 2	150.99	66.69	49.17	29.66	-883	-.275	0.000	158.70	.019	.246	.034	.342	3.911	.132
800 1	187.12	82.64	53.72	32.37	-801	.085	0.000	194.65	.019	.214	.019	.309	3.760	-0.44
800 2	147.70	72.72	56.66	30.66	-.997	-.494	0.000	157.31	.029	.256	.062	.276	3.921	-0.16
830 1	228.11	85.23	63.85	37.02	-1.031	.102	0.000	236.91	.010	.187	.010	.289	3.748	-0.03
830 2	180.81	79.55	63.40	35.08	-1.136	-.439	0.000	191.07	.014	.244	.037	.352	4.046	.120
1200 1	213.52	196.63	164.72	69.38	-2.120	15.460	0.000	262.02	.220	.399	.131	.579	4.409	0.000
1500 1	189.06	161.77	109.72	57.64	-2.459	1.776	0.000	208.40	.342	.392	.349	.396	4.762	0.000
1500 2	322.32	135.84	99.07	50.96	-2.402	-.506	0.000	36.88	.019	.154	-.209	.326	3.795	-.275
1500 3	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1530 1	315.62	146.85	101.37	48.78	-1.934	.304	0.000	342.31	.051	.230	-.249	.386	3.806	.052
1530 2	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1500 3	313.63	150.78	97.96	49.98	-1.979	.719	0.000	330.56	.038	.227	-.177	.364	3.812	-.066
1530 4	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000
1530 5	307.63	136.75	97.46	48.63	-1.941	.264	0.000	321.93	.030	.217	-.223	.356	3.824	.058
1530 6	0.00	0.00	0.00	0.00	0.000	0.000	0.000	0.00	0.000	0.000	0.000	0.000	0.000	0.000

TIME SITE START	ETA	THETA	BETA	HU SENSIBLE HEAT TRANS ...CAL/(CM2-MIN)...	HV HEAT TRANS ...CAL/(CM2-MIN)...	HW MEAN ST DEV CENTIGRADE	EU LATENT HLA7 TRANS ...CAL/(CM2-MIN)...	EV H2O HLA7 TRANS ...CAL/(CM2-MIN)...	EP PARTS PER 100,000	LIMITS EXCEEDED	
										VSQ	F
91568											
600 1	0.086	-0.194	-0.046	0.886	-0.015	-0.207 22.	0.170	0.000	0.000	171	938
600 2	-0.057	-0.005	-0.204	0.869	0.007	-0.202 21.	0.160	-0.070	-0.083	27	519
530 1	0.242	-0.147	0.010	-0.178	0.024	-0.007 23.	0.240	0.000	0.000	137	1288
530 2	0.000	0.000	0.000	0.000	0.000	0.000 0.	0.000	0.000	0.000	0	0
700 1	0.251	-0.095	-0.320	-0.1378	0.029	0.314 23.	0.290	0.000	0.000	366	1907
700 2	0.106	-0.309	-0.510	-0.1288	0.201	-0.257 23.	0.325	-0.085	-0.056	1486	5842
730 1	0.466	-0.184	-0.270	-0.1409	-0.061	0.619 24.	0.430	0.000	0.000	299	1691
730 2	-0.1621	-0.256	-0.680	-0.1762	-0.534	0.523 24.	0.480	-0.223	-0.138	1001	5001
800 1	0.345	-0.117	-0.400	-0.441	-0.383	0.876 26.	0.730	0.000	0.000	814	2897
800 2	-0.227	-0.250	-0.873	-0.3862	0.857	0.937 25.	0.670	-0.325	-0.075	1493	6644
830 1	0.007	-0.129	-0.170	-0.3712	0.163	0.145 24.	0.580	0.000	0.000	232	1273
830 2	-0.1399	-0.297	-0.850	-0.3115	-0.403	0.109 24.	0.520	-0.270	-0.104	1054	4669
11200 1	-0.450	-0.074	0.340	-2.249	-1.2484	0.108 25.	0.800	0.000	0.000	27145	37812
11200 2	-0.3179	0.025	-0.190	-1.9726	-0.8800	0.187 27.	0.950	-0.628	-0.244	28796	37799
13300 1	0.2668	-0.113	-0.020	-0.1896	0.033	0.202 25.	0.610	0.000	0.000	0.000	0.000
13300 2	0.000	0.000	0.000	0.000	0.000	0.000 0.	0.000	0.000	0.000	0.000	0.000
13330 1	-0.1052	-0.049	-0.180	-0.554	-0.041	0.146 24.	0.820	0.000	0.000	5252	6488
13330 2	0.000	0.000	0.000	0.000	0.000	0.000 0.	0.000	0.000	0.000	0.000	0.000
14400 1	0.261	-0.141	-0.180	-0.5311	-0.537	0.160 25.	0.520	0.000	0.000	4819	5718
14400 2	0.000	0.000	0.000	0.000	0.000	0.000 0.	0.000	0.000	0.000	0.000	0.000
1430 1	-0.0905	-0.141	-0.250	-0.4801	-0.040	0.133 24.	0.430	0.000	0.000	3216	4409
1430 2	0.000	0.000	0.000	0.000	0.000	0.000 0.	0.000	0.000	0.000	0.000	0.000

IDENTIFICATION OF HEADINGS
ON DATA LISTING

TIME: Starting time. Pacific Standard time in 1967 and Central Standard in 1968. During 1967, the runs ended at 1 minute and 20 seconds before the hour or half-hour. During 1968, runs were for 30 minutes.

SITE (1967): The site description is given in Chapter 1, as are the instrument locations for April 26-27, and May 2-5. On April 22-25, all anemoclinometers were at 1 meter at the north end of the field.

SITE (1968): Site 1 was located 60 meters south of the instrument trailer in a field of snapbeans. A 3-cm anemoclinometer was mounted at a height of 117 cm. The beans were 25 to 30 cm high.

Site 2 was 10 meters east of site 1. A 3-cm anemoclinometer was mounted at a height of 117 cm except following 1030 on September 14, when the anemoclinometer was moved to 210 cm until 0630 on September 15. It was at 75 cm after 0700 on September 15 for the remainder of the day.

The bean fetch was 60 meters to the north, 50 meters to the east and west, and 100 meters to the south. Beyond the beans to the south was alfalfa extending for 150 meters to a 15-meter high woods. To the west was a 100-meter alfalfa field extending to a 10-meter high shelter belt. Fetch to the northwest beyond the beans was 200 meters of low crops to a shelter belt. To the east was 300 meters of alfalfa extending to a woods.

Mean wind: \bar{U} .

USD: Standard deviation, $(\overline{u'^2})^{1/2}$, cm/sec.

VSD: " " , $(\overline{v'^2})^{1/2}$, cm/sec.

WSD: " " , $(\overline{w'^2})^{1/2}$, cm/sec.

RUW: Reynold's stress, $\overline{\rho u' w'}$, dynes/cm².

RUV: " " , $\overline{\rho u' v'}$, dynes/cm².

RWV: " " , $\overline{\rho w' v'}$, dynes/cm².

HORIZ. WIND: Equivalent to anemometer wind,

$$(\overline{u_1^2} + \overline{v_1^2})^{1/2}, \text{ cm/sec.}$$

F, ELEV. ANGLE: Mean angle of wind with x_1, y_1 plane of anemoclinometer, \bar{F}_4 in program, radians.

FSD, ELEV. ANGLE: Standard deviation of F, $(\overline{F'^2})^{1/2}$.

G, AZIM. ANGLE: Mean angle of wind with the x_1, z_1 plane of the anemoclinometer, $(\bar{G}_2$ in program), radians.

GSD, AZIM. ANGLE: Standard deviation of azimuth angle, $(\overline{G'_4})^{1/2}$ in program.

WIND DIR: Mean wind azimuth direction, $\bar{G}_2 + \bar{G}_3$ in program, measured clockwise from North, radians. (The listing is incorrect and gives mean G_3 ; the G AZIM. ANGLE, \bar{G}_2 , should be added to give the wind direction).

WIND SHIFT: Change in azimuth of mean direction for one half-hour period from the previous half-hour, \bar{G}_4 in program.

ETA: Azimuth angle used in coordinate transform, $\arctan(\bar{v}_1/\bar{u}_1)$, radians.

THETA: Elevation angle used in coordinate transform, $\arctan[\bar{w}_1/(\bar{u}_1^2 + \bar{v}_1^2)^{1/2}]$, radians.

BETA: Rotation angle about x-axis (anemo-
clinometer axis), to force $\overline{w'v'} = 0$,
see transform program.

HU: $\rho c_p \overline{u'T'}$, cal cm⁻² min⁻¹.

HV: $\rho c_p \overline{v'T'}$, cal cm⁻² min⁻¹.

HW: $\rho c_p \overline{w'T'}$ vertical heat flux, cal cm⁻² min⁻¹.

AIR TEMP. MEAN: Mean air temperature, Celsius.

AIR TEMP. ST. DEV: $(\overline{T'^2})^{1/2}$.

EU: $\lambda \overline{u'q'}$, cal cm⁻² min⁻¹.

EV: $\lambda \overline{v'q'}$, cal cm⁻² min⁻¹.

EW: $\lambda \overline{w'q'}$ (latent heat of evaporation),
cal cm⁻² min⁻¹.

LIMITS EXCEEDED (times per 100,000 scans):

VSQ: Times V^2 voltages were negative and
set equal to zero (Program equation
[1A]).

F : Times elevation angle, F, exceeded
40° (0.698 rad) and was set equal to
40° (program equation [7]).

G : Times azimuth angle, G2, exceeded 40°
and was set equal to 40° (Program
equation [5]).

In 1967, the position of the anemoclinometer
was fixed and the azimuth angle G often was very
large. When G was greater than 25°, the data
were discarded. When correlation coefficients
between u' , v' , and w' exceeded unity, the run
was discarded.

The data listing obviously includes more
digits than are experimentally significant.

Notes on 1968 Data

No effort has been made to check the data gathered at Hancock, Wisconsin during 1968. The only data excluded were those where notes indicated obvious instrument failure or when winds were less than 50cm/sec.

There were times when the azimuth servo-drive failed and had to be replaced. The accuracy of the azimuth angle may be in doubt during preceeding periods. Some notes regarding questionable periods are given below.

Site 1: The azimuth potentiometer was not referenced during September 11-12

Site 2: The servo system definitely malfunctioned from 2000h September 11 through 0550h September 12. The motor required replacement at 1200h on September 12. From 1035h September 14 onward, the anemoclinometer was on a mast driven at 1/3 the earlier speed. We believe performance was satisfactory; however, the slow response may have created larger error than would be observed with a faster motor.

General: At night when winds were intermittent and low, the uv signal to the servo system occasionally was too low to actuate the motor. If wind direction had shifted appreciably following a calm period, at times the servo system turned the

wrong direction until it struck a limit stop.

Data differences between site 1 and site 2:

Lower horizontal wind, higher $|\overline{u'w'}|$ and more negative $\overline{u'v'}$ generally are observed at Site 2. This possibly may be due to spatial heterogeneity of the row crop; however, a more likely possibility is that the differences are due to the location of the humidity sensor (see Chapter 5), which may have changed the wind flow around the sphere. There may be other reasons, not yet considered.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) University of Wisconsin Madison, Wisconsin 53706		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE ANEMOCLINOMETER MEASUREMENTS OF REYNOLDS STRESS AND HEAT TRANSPORT IN THE ATMOSPHERIC SURFACE LAYER			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final report - October 1965 to January 1969			
5. AUTHOR(S) (First name, middle initial, last name) Champ B. Tanner and George W. Thurtell			
6. REPORT DATE April 1969		7a. TOTAL NO. OF PAGES 196	7b. NO. OF REFS 56
8a. CONTRACT OR GRANT NO. DA-AMC-28-043-66-622		8b. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 17061102B53A			
c. Task 17		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) ECON 66-622-F	
d.			
10. DISTRIBUTION STATEMENT This document has been approved for public release and sale; its distribution is unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY U. S. Army Electronics Command Atmospheric Sciences Laboratory Fort Huachuca, Arizona 85613	
13. ABSTRACT <p>A small, three-dimensional pressure-probe anemometer (IMFL anemometer) was used to measure the three components of the wind vector, shear stress, and the ratio of the standard deviation of the vertical wind to the friction velocity as influenced by atmospheric stability. Horizontal wind and shear stress have been compared with independent wind profile and shear stress meter measurements. The anemometer was coupled with a fast thermometer for eddy correlation measurements of sensible heat flux and with a fast hygrometer for measurements of latent heat flux. The eddy correlation measurements of sensible and latent heat fluxes were compared with independent energy balance, wind profile, and sonic anemometer-thermometer measurements.</p>			

DD FORM 1473

1 NOV 65

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

UNCLASSIFIED

Security Classification

1C.	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Shear stress Eddy correlation Wind vector components Three-dimensional anemometer Sensible heat flux Evaporation Energy balance						

UNCLASSIFIED

Security Classification