


AD 712564

FINAL REPORT

ONR Contract PO-9-0203*

Laser Physics Branch
Optical Sciences Division
Naval Research Laboratory
Washington, D.C. 20390

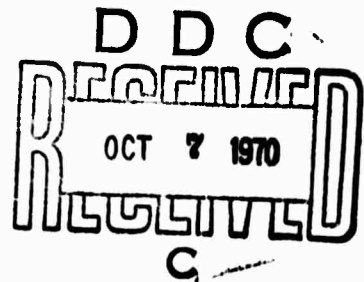

Reproduction in whole or in part is permitted for any purpose of the United States Government.

* This research is partially sponsored by the Advanced Research Projects Agency under ARPA Order 660.

Reproduced by the
CLEARINGHOUSE
for Federal Scientific & Technical
Information Springfield Va. 22151

This document has been approved
for public release and sale; its
distribution is unlimited

**BEST
AVAILABLE COPY**

The research reported here has been carried out in-house at the Naval Research Laboratory and under a small contract (\$25K) to Cornell University. These two programs will be discussed separately although the Cornell work is supportive of a primary goal of the NRL program. The NRL work is jointly sponsored by ONR, ARPA, and by in-house NRL funds.

NRL PROGRAM

The DF-CO₂ vibrational transfer chemical laser has been operated successfully. A power output of 15 watts in a pure spatial mode was obtained with the laser operated as a single pass oscillator. The good beam quality evidenced in the laser's mode structure is an optimistic sign that a powerful beam of high optical quality can be obtained from the DF-CO₂ system. Due to improper injection and mixing of some reactants, only a fraction of the available path length perpendicular to the gas flow supported oscillation. The low gain of the short lasing region prevented the extraction of the available laser power and resulted in an output of 15 watts. A new metallic flow reactor is nearing completion. This new chamber will correct the gas injection problems of the previous design and the output power performance is expected to be greatly enhanced. This new design will also incorporate features which will be used in a parametric study of the DF-CO₂ system to be carried out in FY 71.

The CS₂-O, CO chemical laser has been constructed and is now operating in the small longitudinal flow facility. Two important aspects concerning the operation of fluid mixing chemical lasers has been born out, i.e., the importance of efficient mixing of reactants and the efficacy of altering the intrinsic vibrational population distribution produced in a chemical reaction by the addition of collision partners to form a distribution which

is more favorable for a laser. The importance of good mixing is demonstrated by a factor of 3 increase in output power from the introduction of turbulence into the gas mixing process. Another factor of 3 increase in the output power was obtained by adding unexcited N_2O to the CS_2 . The N_2O is probably serving as an efficient de-activating collision partner for CO.

The high pressure, transverse discharge excitation laser system has been used to study the efficiency of different electrode configurations for this type of laser. The laser is presently operating at a power level of 1 megawatt in a 500 nsec long pulse. Chemical HF lasers have been produced using this method of excitation in a variety of fluorinated hydrocarbon compounds.

CORNELL PROGRAM

The experiment at Cornell with the primary objective of measuring the rate of deactivation of CO_2 (001) by collisions with DF and HF is nearing completion. The method employed is to place a heated cell containing DF + CO_2 inside a Q switched CO_2 laser and to monitor the 4.3μ infrared emission from CO_2 (001) as a function of time after irradiation with a short laser pulse. The data is taken as a function of DF pressure and relaxation by CO_2 - CO_2 collisions is taken into account by use of prior data obtained by Bradley-Moore. A secondary objective will be to measure the pumping rate of DF by CO_2 (001) by measuring infrared radiation from DF. This pumping rate is related to the inverse process by which CO_2 is pumped by DF in the flow laser under construction at NRL. Both these rates are unknown and are important for design and analysis of the CO_2 pure chemical laser under study at NRL. Preliminary data for the deactivation of HF by CO_2 gives a rate constant of $2000 \text{ sec}^{-1} \text{ torr}^{-1}$.

DOCUMENT CONTROL DATA - R & D

Security Classification of title, body of abstract and indexing annotation shall be entered when the overall report is classified.

1. ORIGINATOR'S REPORT NUMBER (If separate author)		2a. REPORT SECURITY CLASSIFICATION	
Naval Research Laboratory Washington, D.C. 20390		Unclassified	
3. REPORT TITLE		2b. GROUP	
FINAL REPORT ONR Contract NO-9-0203			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
Final Report, June 69-June 70			
5. AUTHOR(S) (First name, middle initial, last name)			
Telman Kan			
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS	
September 1970	3	---	
8a. CONTRACT OR GRANT NO.	8b. ORIGINATOR'S REPORT NUMBER(S)		
NO-9-0203			
9. PROJECT NO.	10. OTHER REPORT NUMBERS (Any other numbers that may be assigned this report)		
11. DISTRIBUTION STATEMENT			
Unlimited			
12. SUPPLEMENTARY NOTES		13. SPONSORING MILITARY ACTIVITY	
		Office of Naval Research Physics Branch Washington, D.C. 20340	
14. ABSTRACT			
<p>The research reported here has been carried out in-house at the Naval Research Laboratory and under a small contract (\$20K) to Cornell University. These two programs will be discussed separately although the Cornell work is supportive of a primary goal of the NRL program. The NRL work is jointly sponsored by ONR, AFOSR, and by in-house NRL funds.</p> <p>The DF-100 vibrational transfer chemical laser has been operated successfully. The best beam quality evidenced in the laser's wide structure is an optimum situation where a powerful beam of high optical quality can be obtained from the DF-100 system.</p> <p>The DF-100, Cu chemical laser has been constructed and is now operating in the small longitudinal flow facility. Two important aspects concerning the operation of small mixing chemical lasers has been born out, i.e., the importance of efficient mixing of reactants and the efficacy of altering the intrinsic vibrational population distribution produced in a chemical reaction by the addition of collision partners to form a distribution which is more favorable for a laser.</p> <p>The high pressure, transverse discharge excitation laser system has been used to study the efficiency of different electrode configurations for this type of laser. The laser is operating at a power level of 1 megawatt in a 500 nsec long pulse. Limited experiments have been produced using this method of excitation in a variety of theoretical hydrocarbon compounds.</p>			