

AD-751 317

SUBSONIC PERFORMANCE POTENTIAL OF RAM-  
JETS AND EJECTOR RAMJETS

William E. Supp, et al

Air Force Aero Propulsion Laboratory  
Wright-Patterson Air Force Base, Ohio

May 1972

DISTRIBUTED BY:

**NTIS**

National Technical Information Service  
U. S. DEPARTMENT OF COMMERCE  
5285 Port Royal Road, Springfield Va. 22151

AFAPL-TR-72-7


AD751317

**SUBSONIC PERFORMANCE POTENTIAL  
OF RAMJETS AND EJECTOR RAMJETS**

*WILLIAM E. SUPP  
KENNETH A. WATSON, CAPTAIN, USAF  
JOHN H. MILLER*

TECHNICAL REPORT AFAPL-TR-72-7

MAY 1972

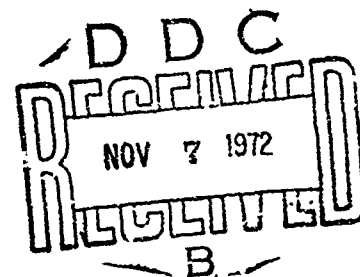

Approved for public release; distribution unlimited.

Reproduced by  
**NATIONAL TECHNICAL  
INFORMATION SERVICE**  
U S Department of Commerce  
Springfield VA 22151

**AIR FORCE AERO PROPULSION LABORATORY  
AIR FORCE SYSTEMS COMMAND  
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433**

98

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

ACQUISITION	
NTIS	Write Section <input checked="" type="checkbox"/>
D C	E.S. Section <input type="checkbox"/>
UNCLASSIFIED	<input type="checkbox"/>
JCS/STANDARD	
BY ...	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	Avail. and/or SPECIAL
A	

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

UNCLASSIFIED

Security Classification

14.	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Ramjets Ejector Ramjets Subsonic Engine Performance Air Breathing Propulsion						

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINAL ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION	
AFAPL Air Force Systems Command Wright-Patterson Air Force Base, Ohio		UNCLASSIFIED	
2b. GROUP			
3. REPORT TITLE			
SUBSONIC PERFORMANCE POTENTIAL OF RAMJETS AND EJECTOR RAMJETS			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
5. AUTHOR(S) (First name, middle initial, last name)			
William E. Supp John H. Miller Kenneth A. Watson			
6. REPORT DATE		7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
May 1972		99 <sub>a</sub>	5
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 3012		AFAPL-TR-72-7	
c. Task 301211		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. DISTRIBUTION STATEMENT			
Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		Air Force Aero Propulsion Laboratory Wright-Patterson Air Force Base, Ohio 45433	
13. ABSTRACT			
<p>A method for analyzing the performance of a ramjet engine at subsonic flight speeds is presented. The absence of a known choked point (<math>M=1</math>) in the engine necessitates an iterative solution. A modified ideal gas analysis is utilized. Considered are the conventional ramjet with liquid fuel injection and an ejector ramjet using vaporized fuel injected into the engine at supersonic velocities. In the latter case, the fuel's momentum is significant and the ejector action draws additional air mass into the engine, which must be considered in the analysis. The method presented compares the two engine cycles at several subsonic flight speeds for both JP-4 and propane fuel. The effects of several levels of component efficiencies are considered.</p>			

**AFAPL-TR-72-7**

**SUBSONIC PERFORMANCE POTENTIAL  
OF RAMJETS AND EJECTOR RAMJETS**

*WILLIAM E. SUPP  
KENNETH A. WATSON, CAPTAIN, USAF  
JOHN H. MILLER*


Approved for public release; distribution unlimited.

FOREWORD

This report was prepared by the Ramjet Applications Branch of the Air Force Aero Propulsion Laboratory, Air Force Systems Command, Wright-Patterson Air Force Base, Ohio. The work described was accomplished under Task 301211, "Ramjet Design and Assessment," of Project 3012, "Ramjet Technology," and represents work accomplished from December 1970 to September 1971. The Project Engineer for this work was W. E. Supp.

This report was submitted by the authors January 1972.

This technical report has been reviewed and is approved.

  
EARL D. PAYNE  
Chief, Ramjet Applications Branch  
Ramjet Engine Division  
Air Force Aero Propulsion Laboratory

ABSTRACT

A method for analyzing the performance of a ramjet engine at subsonic flight speeds is presented. The absence of a known choked point ( $M=1$ ) in the engine necessitates an iterative solution. A modified ideal gas analysis is utilized. Considered are the conventional ramjet with liquid fuel injection and an ejector ramjet using vaporized fuel injected into the engine at supersonic velocities. In the latter case, the fuel's momentum is significant and the ejector action draws additional air mass into the engine, which must be considered in the analysis. The method presented compares the two engine cycles at several subsonic flight speeds for both JP-4 and propane fuel. The effects of several levels of component efficiencies are considered.



## TABLE OF CONTENTS

SECTION	PAGE
I INTRODUCTION	1
II DESCRIPTION OF CYCLES	4
1. The Ramjet Cycle	4
2. The Ejector Ramjet Cycle	5
III ANALYSIS PROCEDURES	9
1. General	9
2. Ramjet Analysis	12
3. Ejector Ramjet Analysis	15
IV STUDY RESULTS	21
1. Ideal Propane Ejector Ramjet	21
2. Propane Ejector Ramjet ( $C_{DB} = 4$ , $\eta_c = .9$ )	23
3. Propane Ejector Ramjet (Diffuser and Dump Losses)	23
4. Ideal Propane Ramjet	27
5. Propane Ramjet ( $C_{DB} = 4$ , $\eta_c = .9$ )	32
6. Ideal JP-4 Ramjet	32
7. JP-4 Ramjet ( $C_{DB} = 4$ , $\eta_c = .9$ )	32
V COMPARISONS	38
VI CONCLUSIONS	46
APPENDICES	
I ENGINE PERFORMANCE COMPUTER PROGRAM INPUT AND OUTPUT PROCEDURES	48
II PROGRAM LISTING	56
REFERENCES	86

## ILLUSTRATIONS

FIGURE	PAGE
1. Ramjet Engine	5
2. Ejector Ramjet Engine	6
3. Ideal Ejector Ramjet Performance	22
4. Ejector Ramjet Performance for $C_{DB} = 4$ and $\eta_c = 90\%$	24
5. Ejector Ramjet Performance With Additive Drag, $C_{DB} = 4$ and $\eta_c = 90\%$	25
6. Effects of Additive Drag on Ejector Ramjet Performance With $C_{DB} = 4$ and $\eta_c = 90\%$	26
7. Ejector Ramjet Performance With Diffuser and Dump Losses and $\eta_c = 90\%$	28
8. Ejector Ramjet Performance With Additive Drag, Diffuser and Dump Losses, and $\eta_c = 90\%$	29
9. Effects of Additive Drag on Ejector Ramjet Performance With Diffuser and Dump Losses, and $\eta_c = 90\%$	30
10. Ideal Propane-Fueled Ramjet Performance	31
11. Propane-Fueled Ramjet Performance With $C_{DB} = 4$ and $\eta_c = 90\%$	33
12. Ideal JP-4 Fueled Ramjet Performance	34
13. JP-4 Fueled Ramjet Performance With $C_{DB} = 4$ and $\eta_c = 90\%$	35
14. JP-4 Fueled Ramjet Performance With Additive Drag, $C_{DB} = 4$ , and $\eta_c = 90\%$	36
15. Effects of Additive Drag on JP-4 Fueled Ramjet Performance With $C_{DB} = 4$ and $\eta_c = 90\%$	37
16. Comparison of the Ideal Engines at $M_0 = 0.7$	41
17. Comparison of the Ideal Engines at $M_0 = 0.95$	42
18. Comparison of the Engines With Efficiencies at $M_0 = 0.7$	43
19. Comparison of the Engines With Efficiencies at $M_0 = 0.95$	44

ILLUSTRATIONS (CONTD)

FIGURE		PAGE
20.	Ejector Ramjet Stream Thrust Ratio	45
21.	Typical Data Deck	54
22.	Sample Output	55

## SYMBOLS

SYMBOL	EXPLANATION
A	area, ft <sup>2</sup>
A <sub>C</sub>	Inlet cowl area, ft <sup>2</sup>
C <sub>DB</sub>	burner drag coefficient
C <sub>F</sub>	thrust coefficient, F/q <sub>0</sub> A <sub>3</sub>
C <sub>FN</sub>	thrust coefficient with additive drag, F <sup>N</sup> /q <sub>0</sub> A <sub>3</sub>
C <sub>P</sub>	pressure coefficient for diffuser
F	net internal thrust, lbf
F <sup>N</sup>	net internal thrust minus additive drag, lbf
f/a	fuel-to-air mass ratio
g <sub>c</sub>	conversion factor = 32.17405 lbm ft/lbf sec <sup>2</sup>
I <sub>sp</sub>	fuel specific impulse, lbf/lbm/hr.
I <sub>sp</sub> <sup>N</sup>	fuel specific impulse with additive drag, lbf/lbm/hr.
$\dot{m}$	mass rate of flow, lbm/sec
M	mach number
M <sub>N</sub>	molecular weight, $\frac{\text{lbm}}{\text{lbm-mole}}$
N <sub>D</sub>	dump pressure loss exponent
P	pressure, lbf/ft <sup>2</sup>
P <sub>T</sub>	total pressure, lbf/ft <sup>2</sup>
$\bar{P}$	stream thrust, lbf
q <sub>0</sub>	free stream dynamic pressure, lbf/ft <sup>2</sup>
R <sup>o</sup>	universal gas constant = 1545 $\frac{\text{ft-lbf}}{\text{lbm-mole} \cdot ^\circ\text{R}}$
T	temperature, °R
T <sub>T</sub>	total temperature, °R

## SYMBOLS (CONTD)

SYMBOL	EXPLANATION
$(\Delta T_T)$ actual	combustor actual total temp. rise, °R
$(\Delta T_T)$ ideal	combustor ideal total temp. rise, °R
$u$	velocity, ft/sec
$X$	X function
$Y$	Y function
$Z$	Z function
	} See Section III
$\gamma$	ratio of specific heats
$\eta_c$	combustion efficiency = $(\Delta T_T)_{\text{actual}} / (\Delta T_T)_{\text{ideal}}$
$\rho$	density; lbm/ft <sup>3</sup>

## SUBSCRIPTS

0 - 5	engine stations (see Figures 1 and 2)
P	ejector ramjet primary chamber
*	ejector ramjet primary nozzle throat
C	ejector ramjet primary nozzle exit
T	total conditions

SECTION I  
INTRODUCTION

The purpose of this report is to analyze the performance of two ramjet engine cycles operating at subsonic flight conditions. One is a conventional liquid-fueled ramjet and the other is an ejector ramjet that uses gaseous propane. Both JP-4 and liquid propane conventional ramjets are considered. The ejector ramjet introduces its fuel at supersonic velocities with a momentum high enough that it might increase the cycle pressure ratio and overall engine performance over that obtainable in the conventional ramjet. The magnitude of this performance is determined on an ideal cycle basis.

In this report, three types of engines are analyzed (see Table I): (1) a propane-fueled ejector ramjet; (2) a propane-fueled ramjet; and (3) a JP-4-fueled ramjet. Several efficiency levels for each type of engine are considered.

First, each engine is assumed to have no internal losses such as burner drag, combustion efficiency losses, diffuser losses, or friction losses. These results establish the basic trends and serve to determine the maximum values possible for the performance variables. This "no loss" case is referred to as the ideal case.

Secondly, component efficiencies are applied equally to all three engines. Baseline values of these component efficiencies were considered to be representative state-of-the-art values for a subsonic, JP-4

AFAPL-TR-72-7

fueled ramjet engine; values used were a burner drag coefficient of 4.0 and a combustion efficiency of 90%. These results establish practical performance estimates for the JP-4 ramjet and compare them with those of propane-fueled engines having equal component efficiencies.

Instead of using a burner drag coefficient, we applied another efficiency factor to the ejector ramjet. Since the ejector ramjet uses the dump into the combustion chamber as the flame-holding device and does not have a baffle type flameholder, the burner drag of 4.0 was replaced with an estimated dump loss correction based on experimental results (Reference 5). Since the ejector ramjet has a diffuser section ahead of the dump, experimental corrections (References 3 and 4) were applied to the flow to account for this diffuser loss.

Most of the above mentioned parametrics were computed assuming variable inlet size and, therefore, do not consider additive drag effects. Several select cases have been corrected for additive drag to demonstrate the order of magnitude of the additive drag correction. The same exit-to-combustor-area ratio of 0.55 is used for all three engines.

A computer program was written to calculate the performance of these engine cycles. The method is described in Section III. Appendixes I and II describe the computer program.

TABLE I  
CYCLES INVESTIGATED

<u>CYCLE</u>	<u>COMPONENT LOSSES</u>
PROPANE-FUELED EJECTOR RAMJET	
Cycle 1	No Losses
Cycle 2	$C_{DB} = 4$ and $\eta_c = 90\%$
Cycle 3	$C_p = 0.51$ , $N_D = 0.25$ and $\eta_c = 90\%$
PROPANE-FUELED RAMJET	
Cycle 1	No Losses
Cycle 2	$C_{DB} = 4$ and $\eta_c = 90\%$
JP-4-FUELED RAMJET	
Cycle 1	No Losses
Cycle 2	$C_{DB} = 4$ and $\eta_c = 90\%$



SECTION II  
DESCRIPTION OF CYCLES

1. THE RAMJET CYCLE

The conventional ramjet engine has been described and analyzed many times in the literature, and this basic treatment will not be repeated here. The majority of these treatments consider the ramjet at supersonic flight speeds with a choked exit nozzle, which presents a convenient station to begin analysis. The ramjet operating at subsonic flight speeds, however, usually has no choked station throughout the entire engine. Figure 1 presents a schematic of such an engine and defines the engine station nomenclature. A convergent nozzle is usually employed and, since the internal flow is entirely subsonic, pressure changes at any station are felt throughout the engine. The mass flow entering the engine will adjust itself, generally, so that the static pressure at the exit (Station 5) is equal to the ambient pressure. There are a few cases at high subsonic flight speeds where Station 5 can be choked with  $P_5 > P_0$ .

For the purposes of this analysis, an ideal inlet was considered so as to facilitate the presentation of data in parametric form. Also, no capture area was specified. Therefore, ideal one-dimensional flow is considered between Station 0 and Station 3. The results thus present the net jet thrust coefficient. A known capture area can be imposed and the data presented can be corrected for additive drag between Station 0 and Station 1. This was done for selected cases to describe the method.

Component losses can be considered if desired. Total pressure losses due to friction or flameholders in the combustor are defined by a burner drag coefficient, to be defined in the next section. A combustion efficiency based on burner ideal total temperature rise can be specified, if desired. The nozzle is considered ideal and no losses are defined. Fuel is considered to be injected at room temperature. The fuel mass is considered in the continuity equation, but its momentum is neglected.

The analysis procedure was chosen to facilitate rapid calculation and convergence on digital computer facilities. Component efficiencies, engine geometries, fuel/air ratio, and flight conditions are assumed. An initial estimate of the free stream area (or mass flow) is made and the properties at each station throughout the engine, from Station 0 to Station 5, are calculated. The static pressure at Station 5 is compared with the ambient static pressure of the known flight condition. These must be equal for a practical solution (except for the one exception where the exit nozzle is choked). If these pressures do not match, the estimated value of  $A_0$  is modified and the calculations are repeated. When this matching of static pressures has been achieved, the engine performance parameters (thrust coefficient and specific impulse) are calculated.

## 2. THE EJECTOR RAMJET CYCLE

The analysis of the ejector ramjet is similar to that of the ramjet except in the treatment of the fuel addition. A schematic of the ejector ramjet is shown in Figure 2. A fuel injector in the form of a primary rocket with a C/D nozzle is located at Station 1. Fuel is heated to vaporization and is then introduced into the primary. This

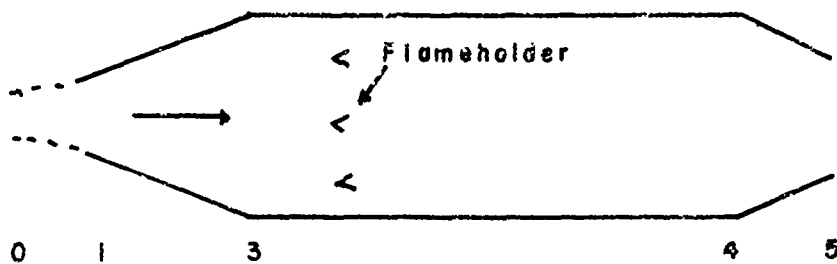


Figure 1. Ramjet Engine

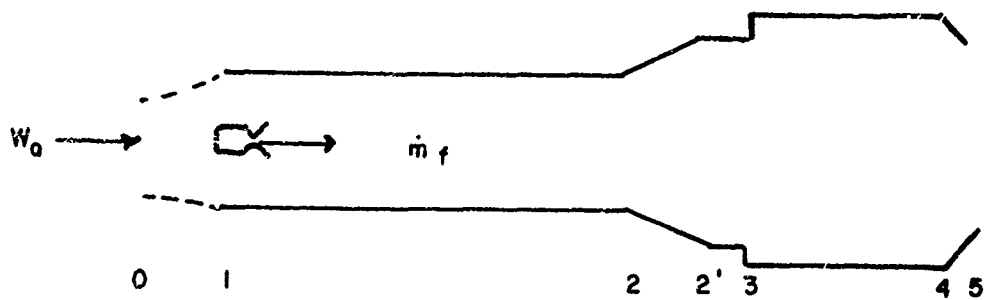


Figure 2. Ejector Ramjet Engine

fuel is gaseous at high pressure and elevated temperature. The fuel expands in the C/D nozzle at supersonic velocities, with a momentum significantly high to be considered in the cycle. The fuel and air mix between Stations 1 and 2 without burning. The mixed stream then enters the combustor through a diffuser and sudden dump. This area change serves as a flameholding device to sustain combustion. The rocket primary acts as an ejector and draws additional air into the engine. The momentum of the primary increases the cycle total pressure ratio over that of a conventional ramjet.

Component losses through the engine can be considered in two ways. A burner drag coefficient can be applied to correct for all pressure losses, as was done for the conventional ramjet. The losses associated with the diffusion and sudden dump can be considered separately as a function of the geometry with correlations to be described in the next section. A combustion efficiency based on the burner ideal total temperature rise can be specified if desired. Incomplete mixing of the fuel and the air in the mixing tube will result in less ejector action and less mass flow through the engine than the ideal case.

A provision is incorporated to account for these estimated losses. The method chosen is to arbitrarily reduce the primary momentum by some percentage to obtain a reduced pressure level at the end of the mixing tube (Station 2). This method was chosen for ease in computer programming and results in a converged air mass flow less than that obtained from the ideal ejector ramjet but still more than that possible from the conventional ejector ramjet at the same condition. The component losses can be applied to

AFAPL-TR-72-7

the degree necessary to reduce ideal ejector performance to the level corresponding to actual test data. Mixing losses were not considered in the study results presented in this report.

SECTION III  
ANALYSIS PROCEDURES

## 1. GENERAL

The ramjet and ejector ramjet cycles can be analyzed using constant gamma, ideal gas equations. It is a requirement for subsonic engines that the pressure at the exit of the nozzle be equal to the free stream pressure. It is therefore the purpose of the cycle analysis to find the air flow through the engine which will allow the nozzle exit pressure to match the free stream pressure for the given engine parameters. To calculate the nozzle exit pressure, it is necessary to calculate the Mach number and pressure at each station of the engine beginning at the inlet. There is one exception to the above criteria. If the nozzle is choked the exit pressure can be greater than or equal to ambient pressure

The Mach functions X, Y, and Z will be used to simplify the analysis procedure in this report. The following is a brief discussion of these functions. The equations of continuity, and momentum and energy are used to relate the conditions at one engine station to another. The continuity equation in its simplest form states that the mass flow rate at Station i is equal to the mass flow rate at Station i+1. This is written

$$\dot{m}_i = \dot{m}_{i+1} + \dot{m}_{added} \quad (1)$$

Using the ideal gas law  $\rho = \frac{PM_w}{RT}$

AFAPL-TR-72-7

and the following relationships

$$\dot{m} = \rho A V$$

$$\frac{T_T}{T} = 1 + \frac{\gamma-1}{2} M^2$$

$$\frac{P_T}{P} = \left( 1 + \frac{\gamma-1}{2} M^2 \right)^{\frac{\gamma}{\gamma-1}}$$

Equation 1 can be written

$$\left[ \frac{P_T A M}{\sqrt{T_T}} \sqrt{\gamma \left( 1 + \frac{\gamma-1}{2} M^2 \right)^{\frac{\gamma+1}{1-\gamma}}} \sqrt{\frac{g_c M_w}{R}} \right]_i$$

$$= \left[ \frac{P_T A M}{\sqrt{T_T}} \sqrt{\gamma \left( 1 + \frac{\gamma-1}{2} M^2 \right)^{\frac{\gamma+1}{1+\gamma}}} \sqrt{\frac{g_c M_w}{R}} \right]_{i+1}$$

+  $\dot{m}$  added

This equation is simplified by defining

$$X = M \sqrt{\gamma \left( 1 + \frac{\gamma-1}{2} M^2 \right)^{\frac{\gamma+1}{1-\gamma}}}$$

This gives the final form of the continuity equation

$$\left[ \frac{P_T A X}{\sqrt{T_T}} \sqrt{\frac{g_c M_w}{R}} \right]_i = \left[ \frac{P_T A X}{\sqrt{T_T}} \sqrt{\frac{g_c M_w}{R}} \right]_{i+1} + \dot{m} \text{ added} \quad (2)$$

The momentum equation for a frictionless, constant area duct is

$$\left[ \frac{\dot{m} u}{g_c} + PA \right]_i = \left[ \frac{\dot{m} u}{g_c} + PA \right]_{i+1}$$

This equation can be expanded in a manner similar to the continuity equation to give

$$[P_T A Z]_i = [P_T A Z]_{i+1} \quad (3)$$

where Z is defined as

$$Z = \frac{1 + \gamma M^2}{\left(1 + \frac{\gamma-1}{2} M^2\right)^{\frac{\gamma}{\gamma-1}}}$$

The quantity  $P_T A Z$  is called stream thrust and is denoted by the symbol  $\bar{P}$ . If the continuity and momentum equations are combined, the following equation is obtained

$$\bar{P} = \frac{\dot{m} \sqrt{T_T}}{\gamma} \sqrt{\frac{R}{g_c M_w}} \quad (4)$$

where

$$\gamma = \frac{x}{z}$$

Equations 2, 3, and 4 are used to calculate the flow conditions through the inlet. A complete explanation of these equations is given in Reference 2. The Mach number functions X, Y, and Z are used to determine the Mach number.

In this study, all engine areas and the fuel/air ratio are assumed known, as well as the free-stream temperature, pressure, and Mach number.



The ideal temperature rise in the combustor, the molecular weight, and the gamma at the exit of the combustor are tabulated as a function of the air total temperature and the fuel/air ratio. Values of combustion efficiency,  $\eta_c$ , and burner drag coefficient,  $C_{DB}$ , were assumed to permit us to evaluate their effect on engine performance.

The combustion efficiency is defined as

$$\eta_c = \frac{(\Delta T_T)_{\text{actual}}}{(\Delta T_T)_{\text{ideal}}}$$

The burner drag coefficient is defined as

$$C_{DB} = \frac{\bar{P}_3 - \bar{P}_4}{\frac{1}{2} \gamma_3 A_3 M_3^2 P_3}$$

where the term  $\bar{P}_3 - \bar{P}_4$  is the drag loss caused by the flameholder.

## 2. RAMJET ANALYSIS

The ramjet analysis consisted of the following: First we assumed an inlet capture area. Then we used the continuity equation to calculate the conditions at the entrance to the combustor, and the momentum and continuity equations to calculate the conditions at the exit of the combustor. Finally, we used the continuity equation to relate the condition at the exit of the combustor to the conditions at the exit of the nozzle.

The method of analysis is as follows:

(a) Assume an  $A_0$ .

(b) From continuity, calculate the Mach number at Station 3.

Assuming the inlet isentropically diffuses the air and the value of gamma at both stations is 1.4, then

$$X_3 = X_0 \frac{A_0}{A_3}$$

$$M_3 = f(X_3)$$

(c) Calculate the free-stream total pressure.

$$P_{T0} = P_0 \left( 1 + \frac{\gamma_0 - 1}{2} M_0^2 \right)^{\frac{\gamma_0}{\gamma_0 - 1}}$$

Since isentropic diffusion has been assumed in the inlet, it follows that

$$P_{T3} = P_{T0}$$

(d) Calculate the mass flow rate of air

$$\dot{m}_A = P_0 A_0 M_0 \sqrt{\frac{\gamma_0}{R T_0}} \frac{A_0 w_0}{R T_0}$$

(e) From the given fuel/air ratio, calculate the fuel flow rate.

$$\dot{m}_f = \dot{m}_A f/a$$

(f) Calculate the Mach number at Station 4 from the continuity and momentum equations.

$$Y_4 = \frac{Y_3}{1 + f/a} \sqrt{\frac{M_{w0}}{M_{w4}} \left[ 1 + \eta_c \frac{(T_4 - T_0)}{T_0} \right]} \frac{1 + \gamma M_3^2}{\left[ 1 + \gamma M_3^2 \left( 1 - \frac{1}{2} C_{DB} \right) \right]}$$

$$M_4 = f(Y_4)$$

(g) Calculate the total pressure at Station 4 from the momentum equation.

$$P_{T4} = P_{T3} \left[ \frac{z_3}{z_4} - \frac{1}{2} C_{DB} \frac{\gamma_2 M_3^2}{z_4} \frac{P_3}{P_{T3}} \right]$$

(h) Calculate the Mach number at Station 5 from the continuity equation. It is assumed that the values of gamma, total temperature, and total pressure at Station 5 are the same as those at Station 4.

$$X_5 = X_4 \frac{A_4}{A_5}$$

$$M_5 = f(X_5)$$

(i) Calculate the static pressure at Station 5.

$$P_5 = \frac{P_{T4}}{\left( 1 + \frac{\gamma_4 - 1}{2} M_5^2 \right)^{\gamma_4 / \gamma_4 - 1}}$$

(j) Compare the static pressure at Station 5 with the ambient pressure  $P_0$ . If these pressures do not compare reasonably well, adjust  $A_0$  and return to Step b. If

$$P_5 > P_0, \text{ increase } A_0$$

$$P_5 < P_0, \text{ decrease } A_0$$

AFAPL-TR-72-7

Once the pressures have been satisfactorily matched, the engine performance can be calculated.

$$(k) \text{ Thrust} = P_{T4} A_5 Z_5 - P_{T0} A_0 Z_0 - P_0 (A_5 - A_0)$$

$$I_{sp} = \text{thrust}/\dot{m}_f$$

Note: If the Mach number at any station exceeds one, reduce  $A_0$  and return to Step (b). If the Mach number at Station 5 equals one and  $P_5 \geq P_0$ , this is a solution.

### 3. EJECTOR RAMJET ANALYSIS

The ejector ramjet was analysed in a manner similar to the ramjet. In addition to burner drag and combustion efficiency, ejector effectiveness, diffuser and dump loss were also considered. Integration of the ejector into the ramjet cycle analysis is the only major deviation from the previous analysis.

The method of analyzing the ejector ramjet is as follows:

(a) Assume a value for  $A_0$ .

(b) From the continuity equation, calculate the Mach number at Station 1, assuming the inlet isentropically diffuses the air, and the value of gamma at both stations is 1.4.

$$X_1 = X_0 \frac{A_0}{A_1}$$

$$M_1 = f(X_1)$$

(c) Calculate the free stream total pressure

$$P_{T0} = P_0 \left( 1 + \frac{\gamma_0 - 1}{2} M_0^2 \right)^{\frac{\gamma_0}{\gamma_0 - 1}}$$

AFAPL-TR-72-7

Since isentropic diffusion has been assumed in the inlet, it follows that

$$P_{T1} = P_{T0}$$

(d) Calculate the air stream thrust at Station 1 from the momentum equation.

$$\bar{P}_{A1} = P_{T0} A_1 Z_1$$

(e) Calculate the mass flow rate of air.

$$\dot{m}_A = P_0 A_0 M_0 \sqrt{\frac{\gamma_0 g_c M_w}{R T_0}}$$

(f) From the given fuel/air ratio, calculate the fuel flow rate.

$$\dot{m}_f = \dot{m}_A f/a$$

(g) Calculate the total pressure of the fuel injector assuming a choked throat. In this analysis the ejector geometry is fixed; therefore, the ejector total pressure is varied to match the flow rate.

$$P_{TP} = \frac{\dot{m}_f}{A_* X_*} \sqrt{\frac{T_{Tf} R}{g_c M_w}}$$

where  $A_*$  = area of injector throat  
 $X_*$  = X function at throat  
 $T_{Tf}$  = total temperature of fuel

(h) Calculate the Mach number at the exit of the injector.

$$X_e = \frac{X_* A_*}{A_e}$$
$$M_e = f(X_e)$$

- (i) Calculate the stream thrust at the ejector exit..

$$\bar{P}_e = P_{TP} A_e Z_e$$

(j) Calculate the temperature, molecular weight, and gamma of the mixed fuel and air at Station 2 by mass averaging the individual properties. The individual physical properties are obtained from tables of data or empirical correlations.

(k) Calculate the stream thrust at Station 2 from the momentum equation. For the ideal case

$$\bar{P}_e = \bar{P}_1 + \bar{P}_e$$

If it is desired to account for inefficiency of the ejector action, a component efficiency can be incorporated. For example

$$\bar{P}_2 = \bar{P}_1 + \eta \bar{P}_e$$

(l) Calculate the Mach number at Station 2, from the continuity and momentum equations.

$$Y_2 = \frac{\dot{m}_A \dot{m}_f}{F_2} \sqrt{\frac{\gamma_{T_2} R}{g_c M_{w_2}}}$$

$$M_2 = f(Y_2)$$

(m) Calculate the total pressure at Station 2 from the momentum equation.

$$P_{T2} = \frac{\bar{P}_2}{A_2 Z_2}$$

AFAPL-TR-72-7

(n) Calculate the static pressure at Station 2.

$$P_2 = P_{T2} \left( 1 + \frac{\gamma_2 - 1}{2} M_2^2 \right)^{\frac{\gamma_2}{1 - \gamma_2}}$$

(o) Calculate the static pressure at Station 2' if diffuser losses are to be considered

$$P_2' = \left( \frac{1}{2} \bar{C}_p \gamma_2 M_2^2 + 1 \right) P_2$$

where  $\bar{C}_p$  is an experimentally determined diffuser loss factor obtained from References 3 and 4. If isentropic diffusion is assumed

$$P_2' = P_2$$

(p) Calculate the Mach number at Station 2' using the continuity equation.

$$M_2' = \left[ -1 \pm \sqrt{\frac{1 + 2(\gamma_2 - 1)(\dot{m}_A + \dot{m}_f) R T_{T2}}{P_2'^2 A_2'^2 \gamma_2 g_c M_w}} \right]^{\frac{1}{2}}$$

(q) Calculate the total pressure after the dump at Station 3, by using the following equation:

$$P_{T3} = P_2' \left[ \left( 1 + \frac{\gamma_2 - 1}{2} M_2'^2 \right)^{\frac{\gamma_2}{\gamma_2 - 1}} \right] e^{-\frac{1}{2} N_D \gamma_2 M_2'^2}$$

where  $N_D$  is obtained from Reference 5.

(r) Calculate the Mach number after the dump at Station 3.

$$X_3 = \frac{(\dot{m}_A + \dot{m}_f)}{P_{T3} A_3} \sqrt{\frac{R T_{T2}}{g_c M_{w2}}}$$

$$M_3 = f(X_3)$$

(s) Calculate the static pressure at Station 3.

$$P_3 = P_{T3} \left(1 + \frac{\gamma_2 - 1}{2} M_3^2\right)^{\frac{\gamma_2}{1 - \gamma_2}}$$

(t) Calculate the Mach number at Station 4 from the continuity and momentum equations.

$$Y_4 = Y_3 \sqrt{\frac{M_{w2}}{M_{w4}} \left[1 + \frac{\eta_c (T_{T4} - T_{T2})}{T_{T2}}\right]} \frac{1 + \gamma M_3^2}{\left[1 + \gamma M_3^2 (1 - \gamma_2 C_{DB})\right]}$$

$$M_4 = f(Y_4)$$

(u) Calculate the total pressure at Station 4 from the momentum equation.

$$P_{T4} = P_{T3} \left[ \frac{Z_3}{Z_4} - \frac{1}{2} C_{DB} \gamma_2 \frac{M_3^2}{Z_4} \frac{P_3}{P_{T3}} \right]$$

(v) Calculate the Mach number at Station 5 from the continuity equation. It is assumed that the values of gamma, total temperature, and total pressure at Station 5 are the same as those at Station 4.

$$X_5 = X_4 \frac{A_4}{A_5}$$

$$M_5 = f(X_5)$$



AFAPL-TR-72-7

(w) Calculate the static pressure at Station 5.

$$P_5 = P_{T_4} \left(1 + \frac{\gamma_4 - 1}{2} M_5^2\right)^{\frac{\gamma_4}{1 - \gamma_4}}$$

(x) Compare the static pressure at Station 5 with the ambient pressure  $P_0$ . If these pressures do not compare reasonably well, adjust  $A_0$  and return to Step (b).

(y) If the static pressure and  $P_0$  match,

$$\text{Thrust} = P_{T_4} A_5 Z_5 - P_{T_0} A_0 Z_0 - P_0 (A_5 - A_0)$$
$$I_{sp} = \text{thrust} / \dot{m}_f$$

Note: If the Mach number at any station exceeds one, reduce  $A_0$  and return to Step (b). If the Mach number at Station 5 equals one and  $P_5 \geq P_0$ , this is a solution.

SECTION IV  
STUDY RESULTS

1. IDEAL PROPANE EJECTOR RAMJET

Figure 3 presents the parametric performance data for a propane fueled subsonic ejector ramjet at an altitude of 23,000 feet,  $A_5/A_3 = 0.55$ , and 100% efficiencies. Plotted is the thrust coefficients ( $C_F$ ) based on free stream dynamic pressure and combustor area versus fuel specific impulse (ISP). The dashed lines represent constant values of fuel-to-air ratio and the solid lines represent constant values of free stream Mach number. Several factors are evident from this figure. First, it is noted that for this ideal case, as the fuel-air ratio decreases the fuel specific impulse continues to increase while the thrust decreases. Obviously, the specific impulse must maximize at some f/a ratio and then decrease as f/a ratio is lowered further. This will be evident when component efficiencies are introduced into the cycle. The second prominent feature occurs above the stoichiometric fuel/air ratio (f/a 0.064). As more fuel is added above the stoichiometric point the thrust continues to increase. This phenomenon is not present in the conventional ramjet because the contribution of fuel momentum is not considered in the ramjet cycle. In the ejector ramjet cycle as the fuel flow rate continues to increase the fuel momentum increases and thrust benefits accrue, at a loss in specific impulse. Also, it is noted that specific impulse improves significantly with Mach Number over the range considered.

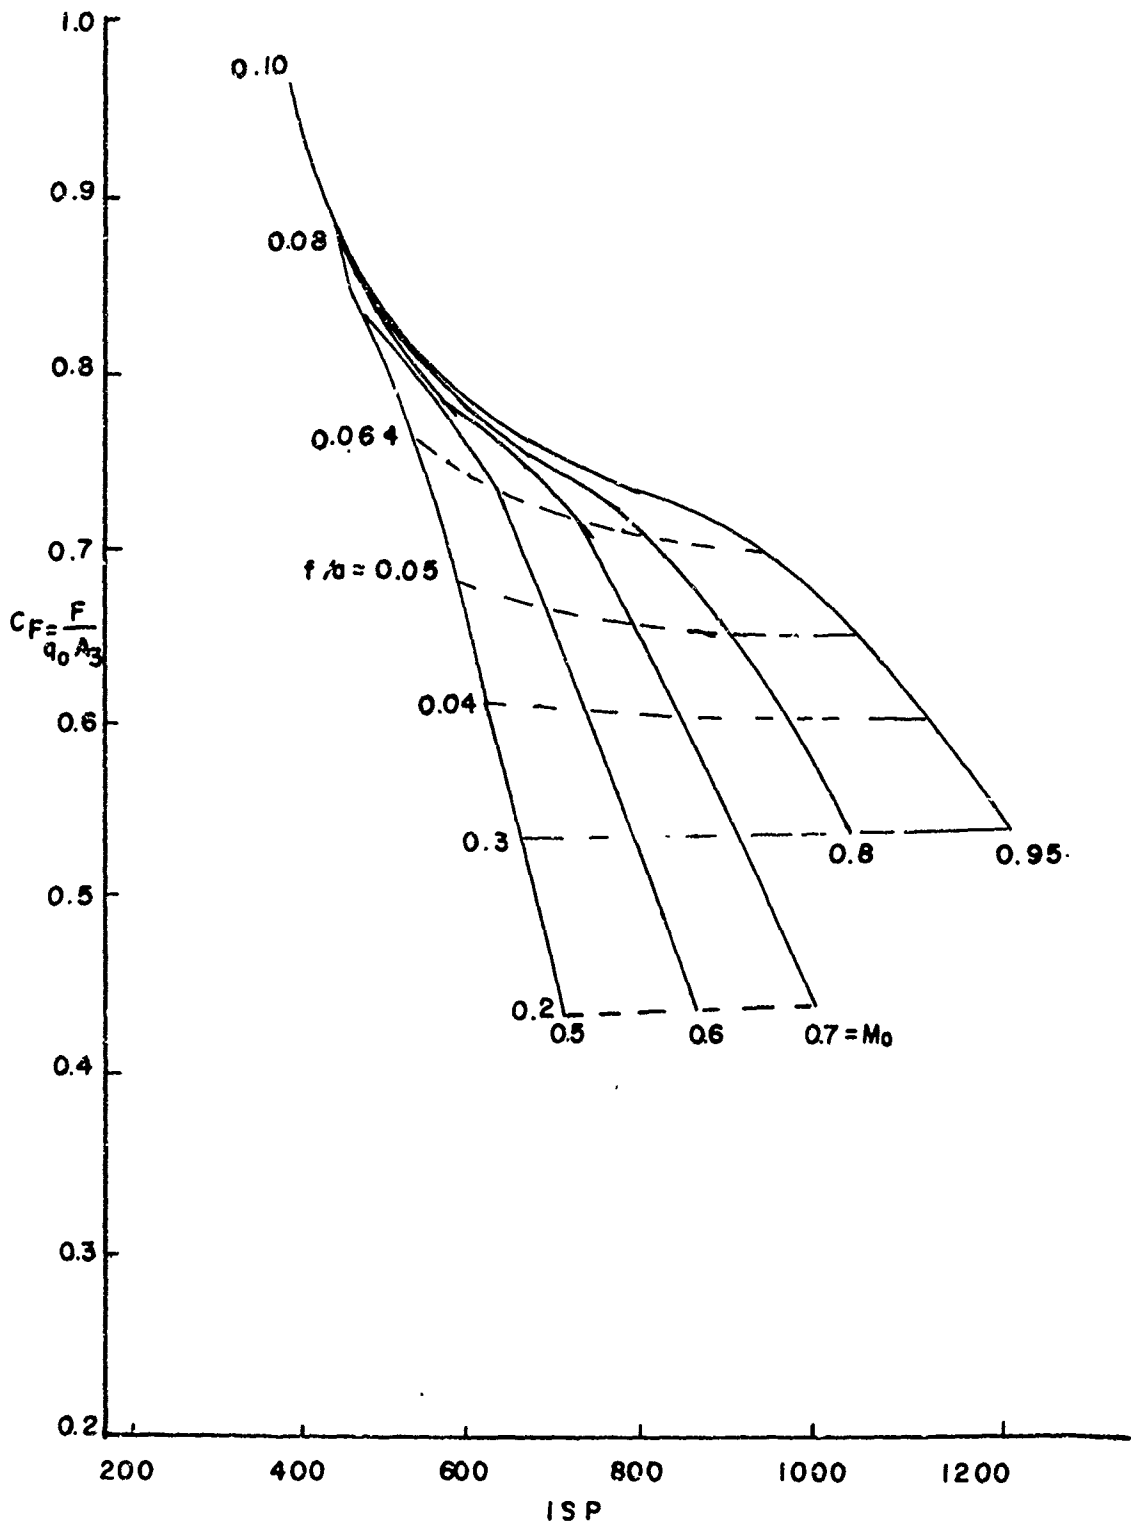


Figure 3. Ideal Ejector Ramjet Performance

## 2. PROPANE EJECTOR RAMJET ( $C_{DB} = 4.0$ , $\eta_c = 0.90$ )

Figure 4 repeats the results of Figure 3 for a propane ejector ramjet except that a burner drag coefficient of 4.0 and a combustion efficiency of 0.90 has been included. If the figures are compared, it can be seen that the performance, both thrust coefficient and specific impulse, have been lowered by including the efficiencies. Also as the fuel-air ratio is decreased the specific impulse does not continue to increase as it did in the ideal case, but maximizes between  $f/a = 0.02$  and  $0.03$  and decreases as  $f/a$  approaches zero. Figure 5 considers additive drag for an engine with  $A_c/A_3 = 0.2047$ . The design point at which this  $A_c/A_3$  was chosen is  $M_0 = 0.95$  and  $C_F = 0.5$ . Figure 6 is a composite of several constant Mach number lines taken from Figures 4 and 5. The dashed lines in Figure 6 stop at the line representing full inlet capture. The additive drag effects on engine performance are small in magnitude but increase with increasing Mach number.

## 3. PROPANE EJECTOR RAMJET (DIFFUSER AND DUMP LOSSES)

It was pointed out previously that the ejector ramjet had a sudden dump into the combustor, which served as a flameholding device; therefore, perhaps the burner drag coefficient of 4.0 used previously was not appropriate. So in an attempt to use component efficiencies consistent with the ejector ramjet geometry, experimental data was obtained to account for the dump loss into the combustor and other data applied to the diffuser directly ahead of the dump. The method of accounting for these effects is described in Section III. A diffuser loss factor  $\bar{C}_p$  of 0.51 and a dump loss factor  $N_D$  of 0.25 were used instead of a burner drag coefficient. A combustion efficiency of 90%

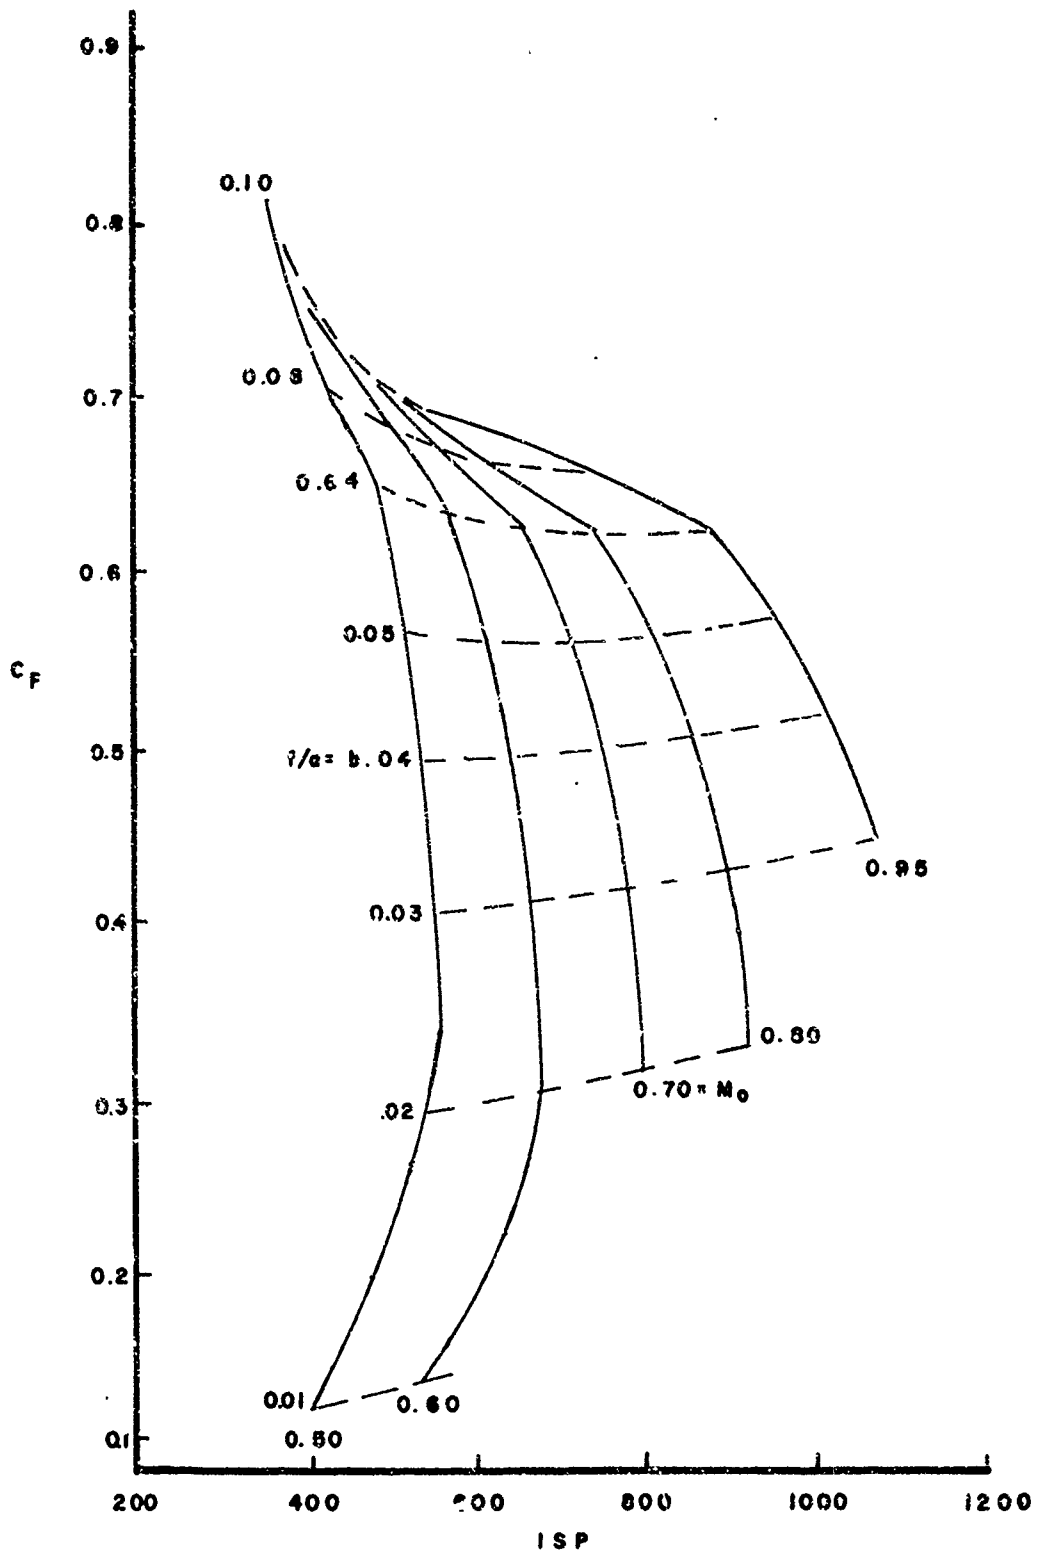


Figure 4. Ejector Ramjet Performance for  $C_{DB} = 4$  and  $\eta_c = 90\%$

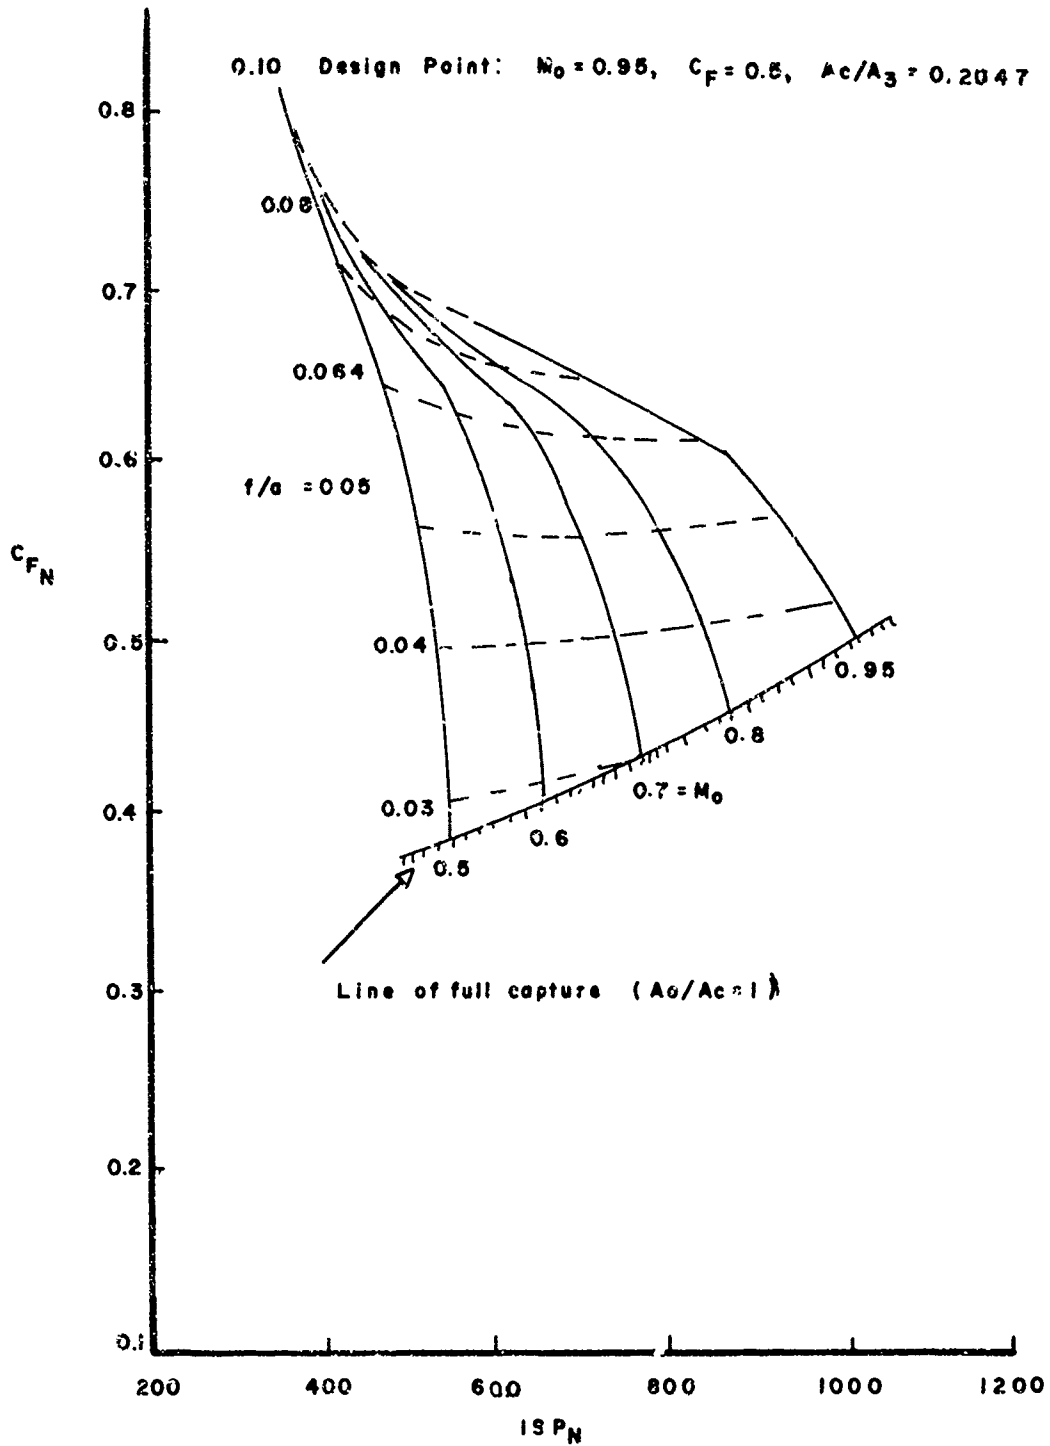


Figure 5 Ejector Ramjet Performance With Additive Drag,  $C_{DB} = 4$  and  $\eta_c = 90\%$

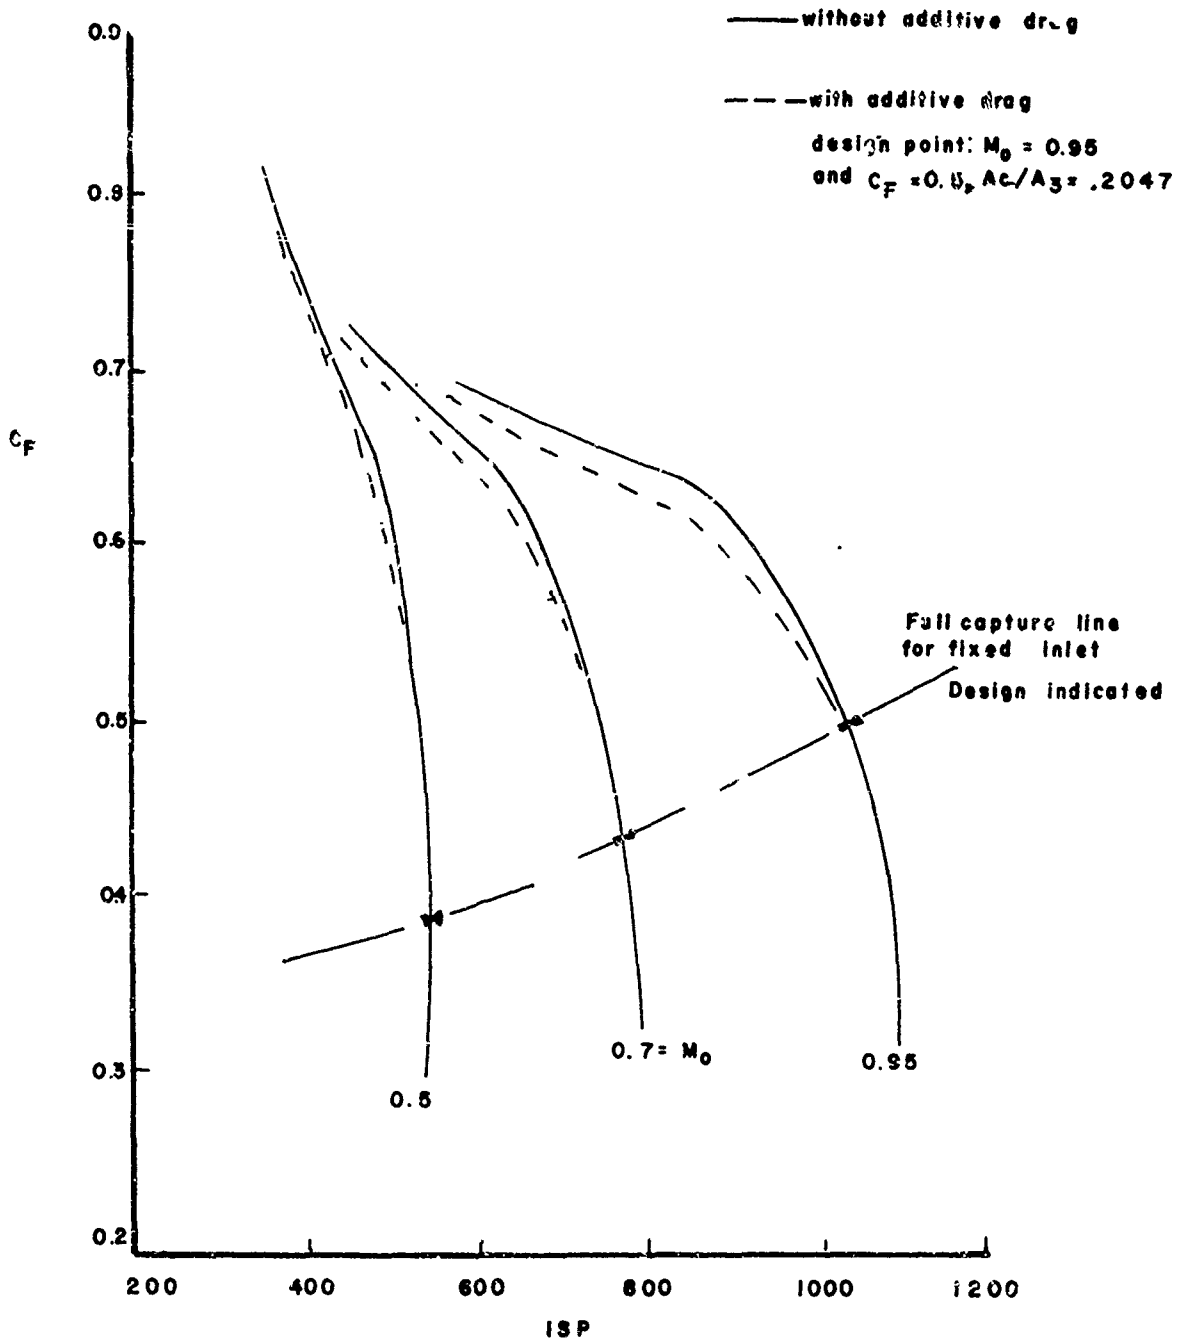


Figure 6. Effects of Additive Drag on Ejector Ramjet Performance With  $C_{DB} = 4$  and  $\eta_c = 90\%$

was maintained. It can be seen from Figure 7 that this case with dump and diffuser loss is worse than the previous case with combustion efficiency of 90% and a burner drag coefficient of 4.0. The absolute values of  $\bar{C}_p$  and  $N_D$  are for the specific geometry evaluated and apply only to that particular case.

Figures 8 and 9 show the effects of additive drag with an  $A_c/A_3 = 0.1825$  which was chosen at the design point corresponding to  $M_0 = 0.95$  and  $C_T = 0.5$ . As was noted for the previous case with  $C_{DB} = 4$ , the additive drag effects for this case are small.

#### 4. IDEAL PROPANE RAMJET

Figure 10 presents the results for a propane-fueled ramjet with no internal flow losses and an exit area ratio  $A_5/A_3$  of 0.55 at 23,000 feet altitude. Figure 10 is a plot of the thrust coefficient versus fuel specific impulse. The same trends are present as for the ejector ramjet (Figure 3) except that above the stoichiometric fuel-air ratio there is no additional increase in the thrust coefficient since fuel momentum is not considered in the ramjet cycle. Thrust coefficient increases with f/a ratio as specific impulse decreases. Here, also, there is no maximization of the specific impulse as the f/a ratio decreases. Again, the specific impulse increases as the subsonic flight speed increases. In general, the ideal ejector ramjet has better performance at fuel/air ratios above approximately 0.025; however, this comparison assumes no internal flow losses for either engine.



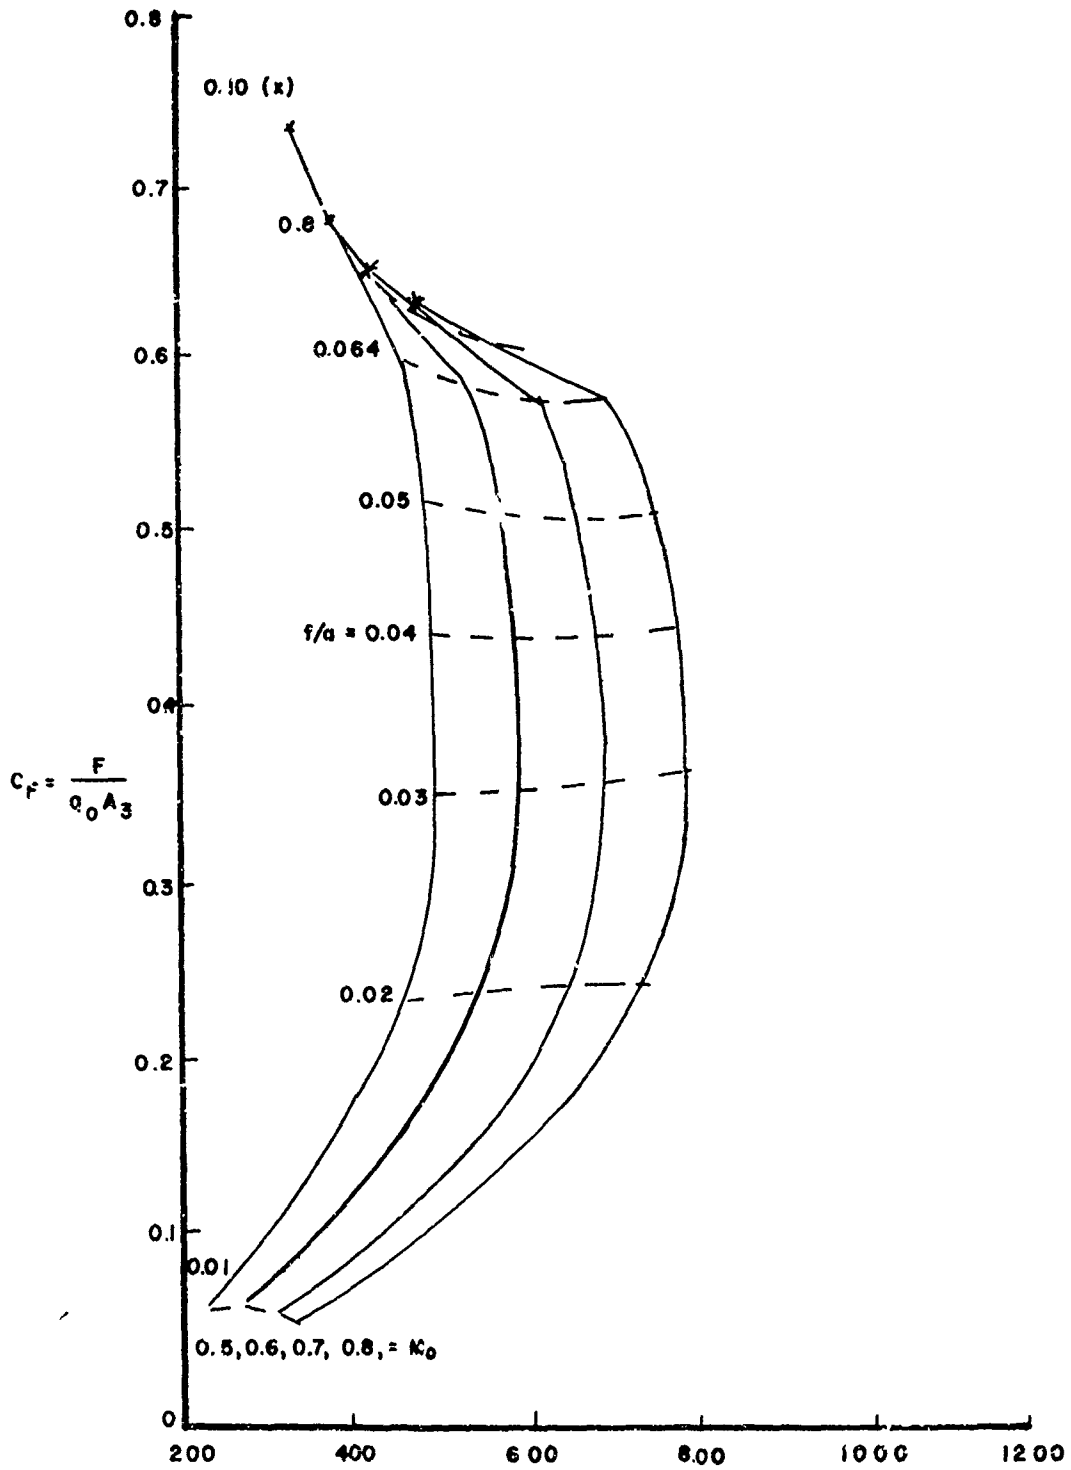


Figure 7. Ejector Ramjet Performance With Diffuser and Dump Losses and  $\eta_c = 90\%$

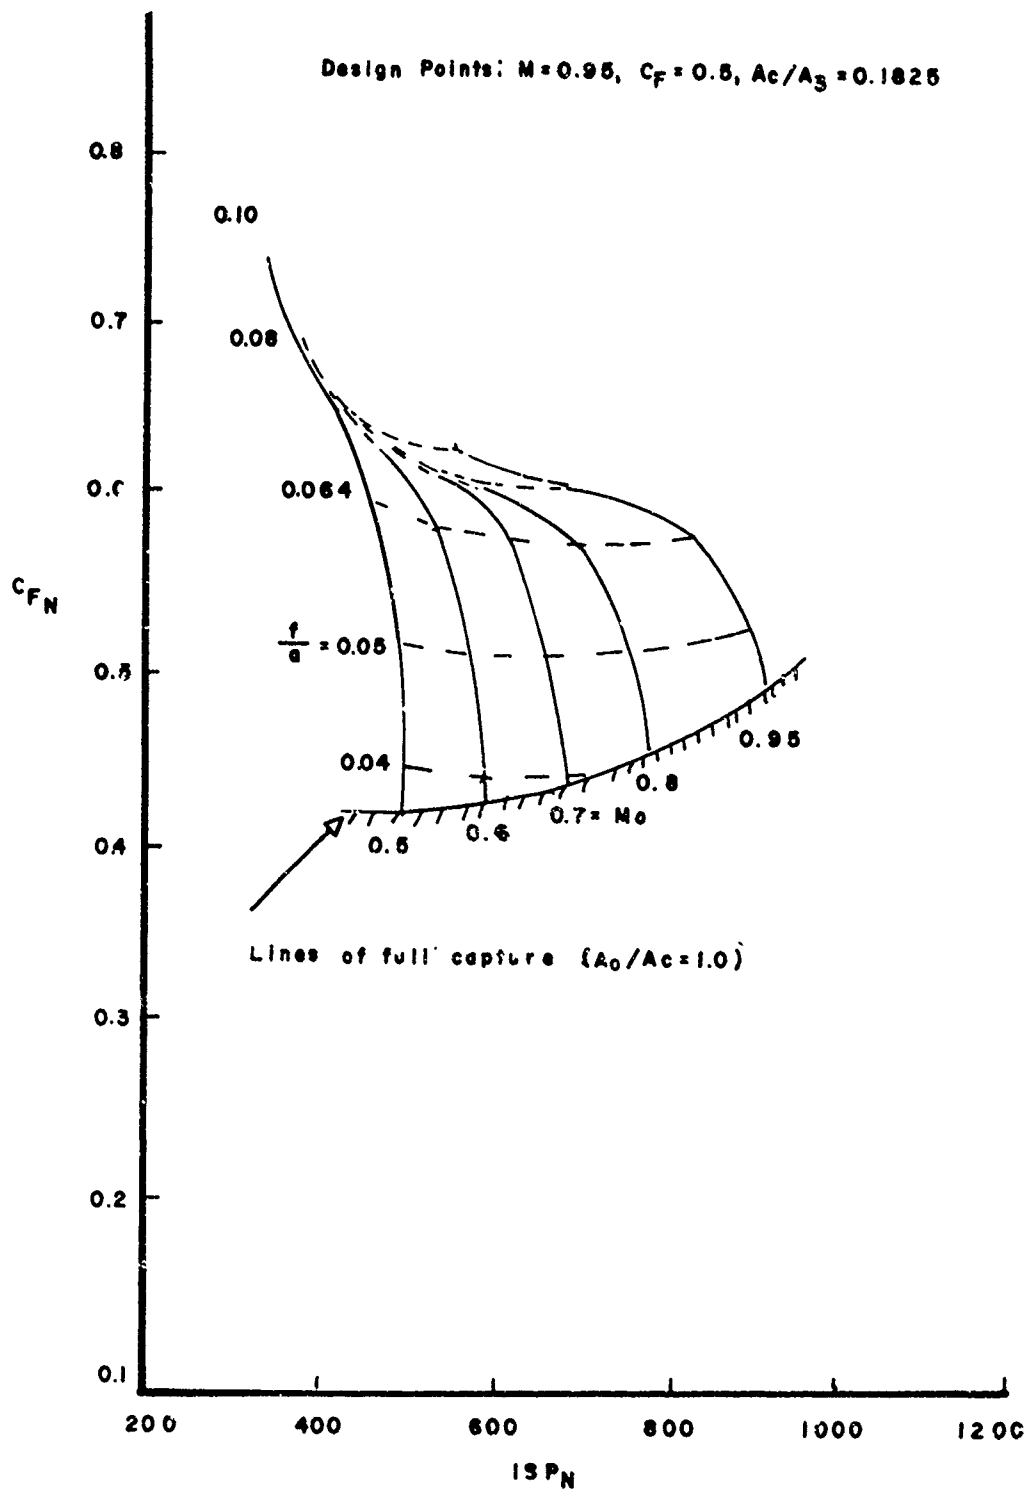


Figure 8. Ejector Ramjet Performance With Additive Drag, Diffuser and Dump Losses, and  $\eta_c = 90\%$

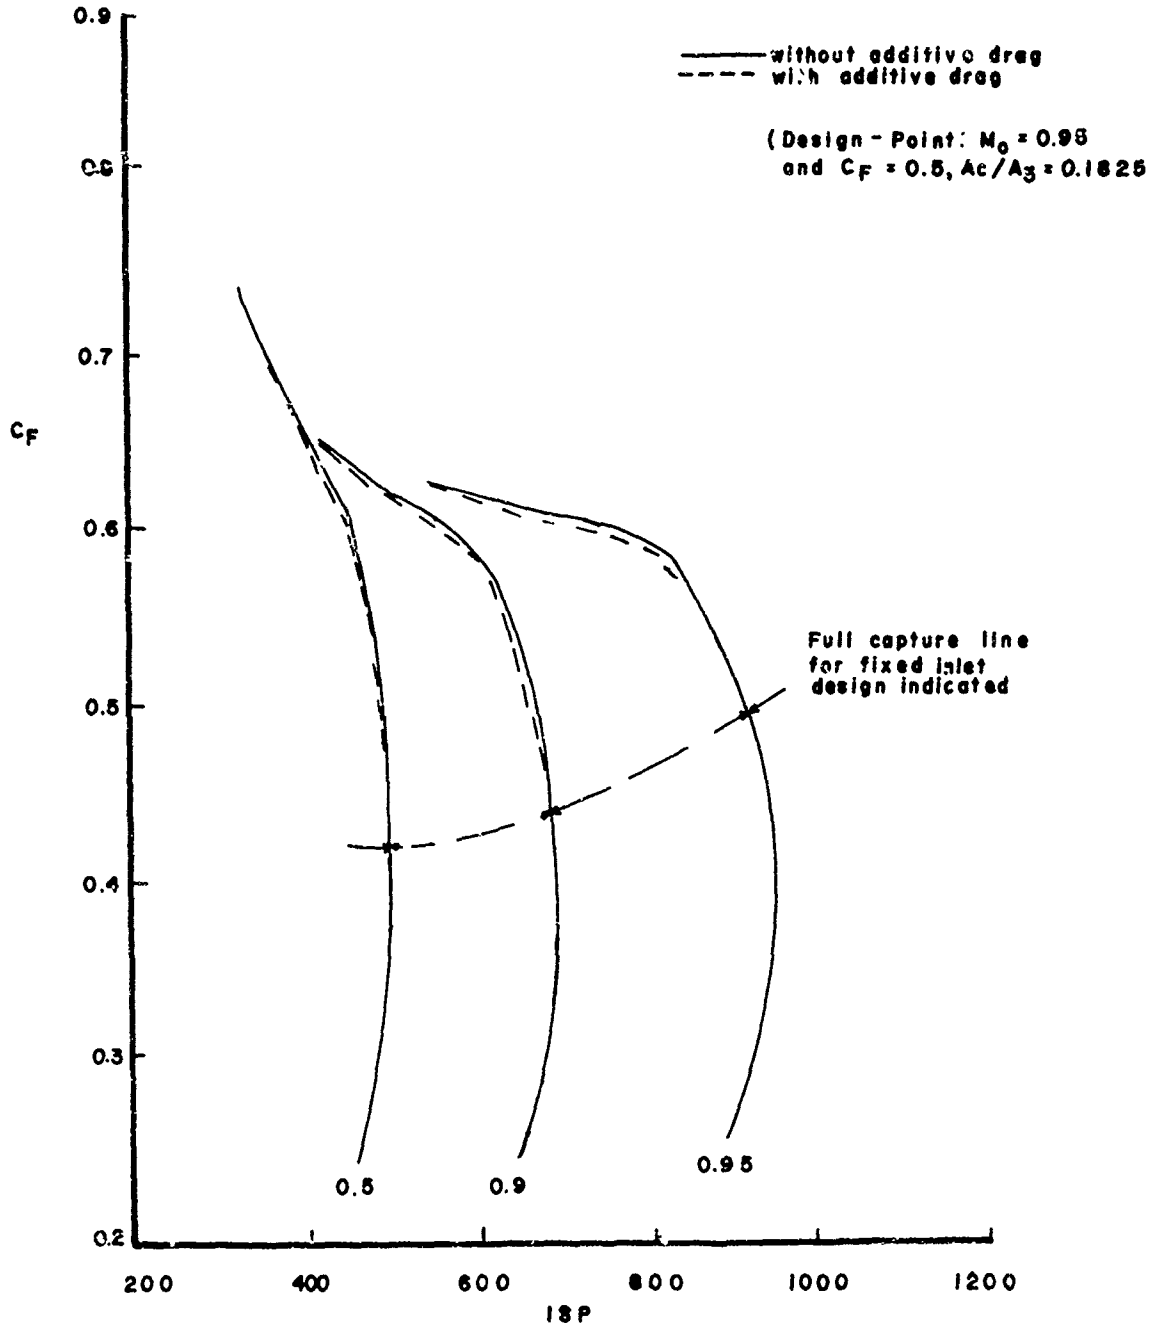


Figure 9. Effects of Additive Drag on Ejector Ramjet Performance With Diffuser and Dump Losses, and  $\eta_c = 90\%$

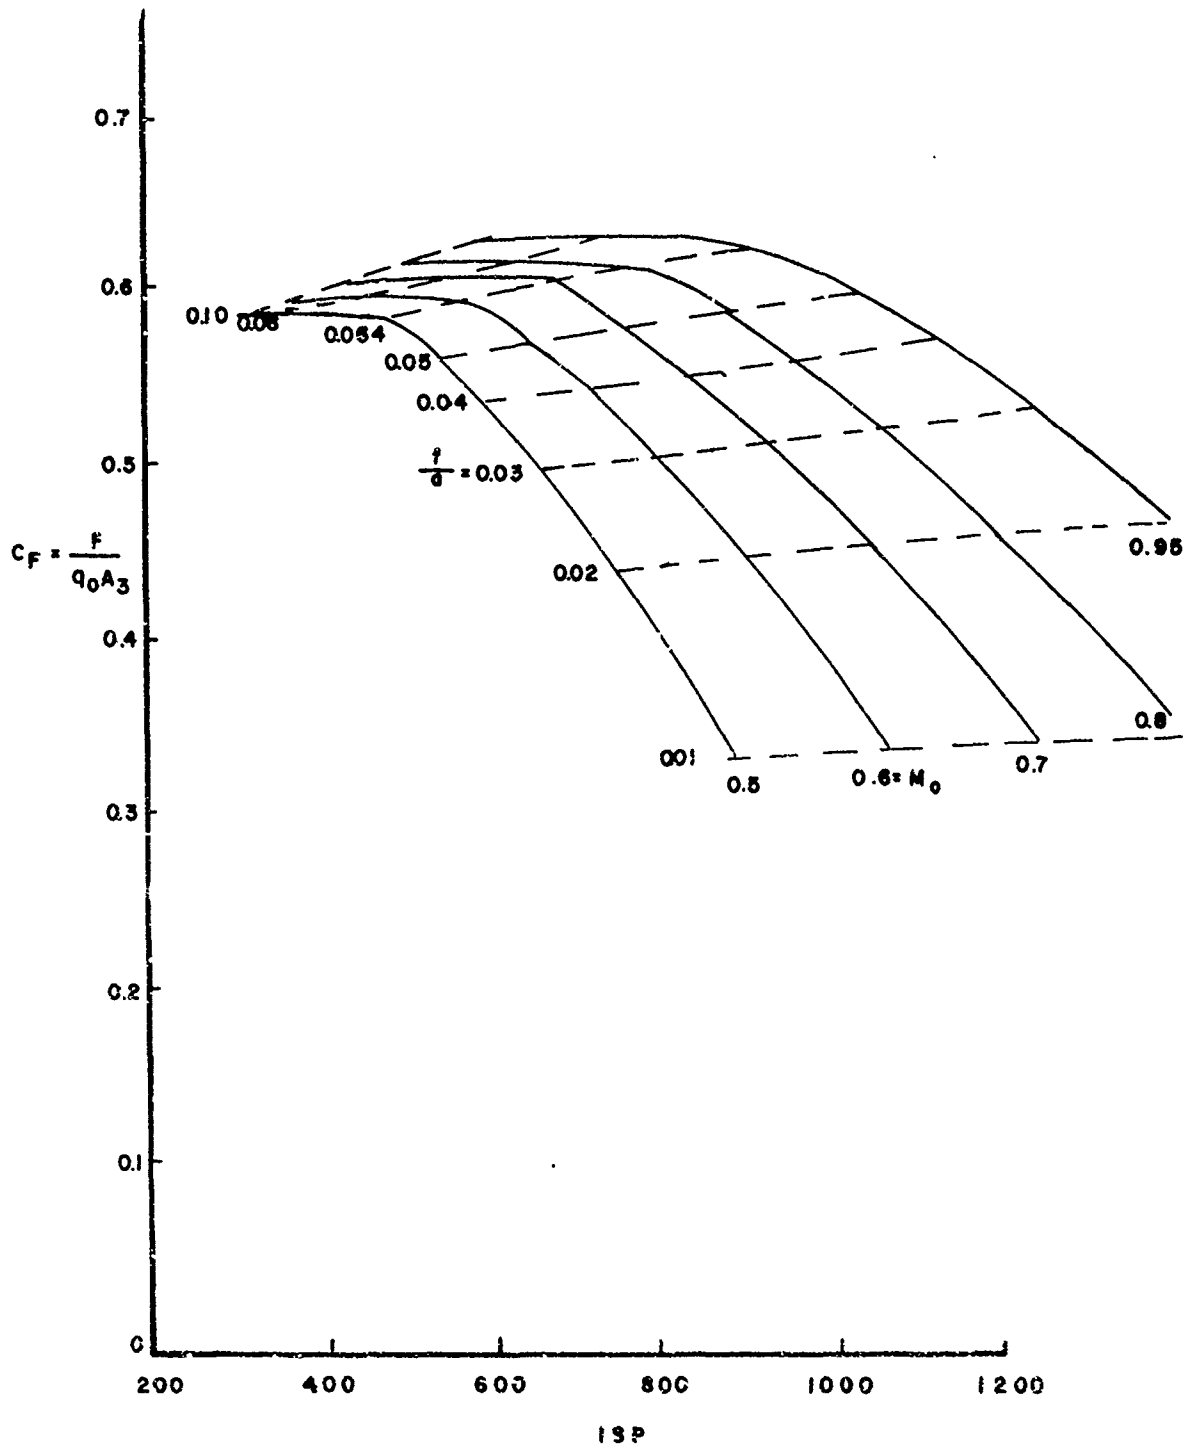


Figure 10. Ideal Propane-Fueled Ramjet Performance

5. PROPANE RAMJET ( $C_{DB} = 4.0$  and  $\eta_c = 0.90$ )

Figure 11 presents the results when using a burner drag coefficient of 4.0 and a combustion efficiency of 0.90 for the propane ramjet. They are directly comparable to the ideal case, Figure 10. While the values of thrust and specific impulse are lower for the case with the burner drag and combustion efficiency, the basic trends are the same with the exception of the lower fuel-air ratios. As the fuel-air ratio decreases, the specific impulse does not continue to increase; it maximizes and then decreases as the f/a ratio approaches zero.

6. IDEAL JP-4 RAMJET

Figure 12 presents the ideal performance for a JP-4 fueled engine. This data is similar to the data shown in Figures 10 and 11 for the propane ramjet. Again no internal losses are assumed and  $A_5/A_3$  is 0.55 at an altitude of 23,000 feet. The same trends are evident although the propane ramjet has a slight advantage at the low and medium fuel-air ratios. Above the stoichiometric fuel-air ratio (0.068 for JP-4 and 0.064 for propane) the performance is almost identical.

7. JP-4 RAMJET ( $C_{DB} = 4.0$  and  $\eta_c = 0.90$ )

Figure 13 presents the results for a JP-4 ramjet with a burner drag coefficient of 4.0 and a combustion efficiency of 0.90. Figure 13 is directly comparable to Figure 12.

Figures 14 and 15 show the effects of additive drag with  $A_c/A_3 = 0.1976$ , which was chosen for the design case of  $M_0 = 0.95$  and  $C_F = 0.5$ .

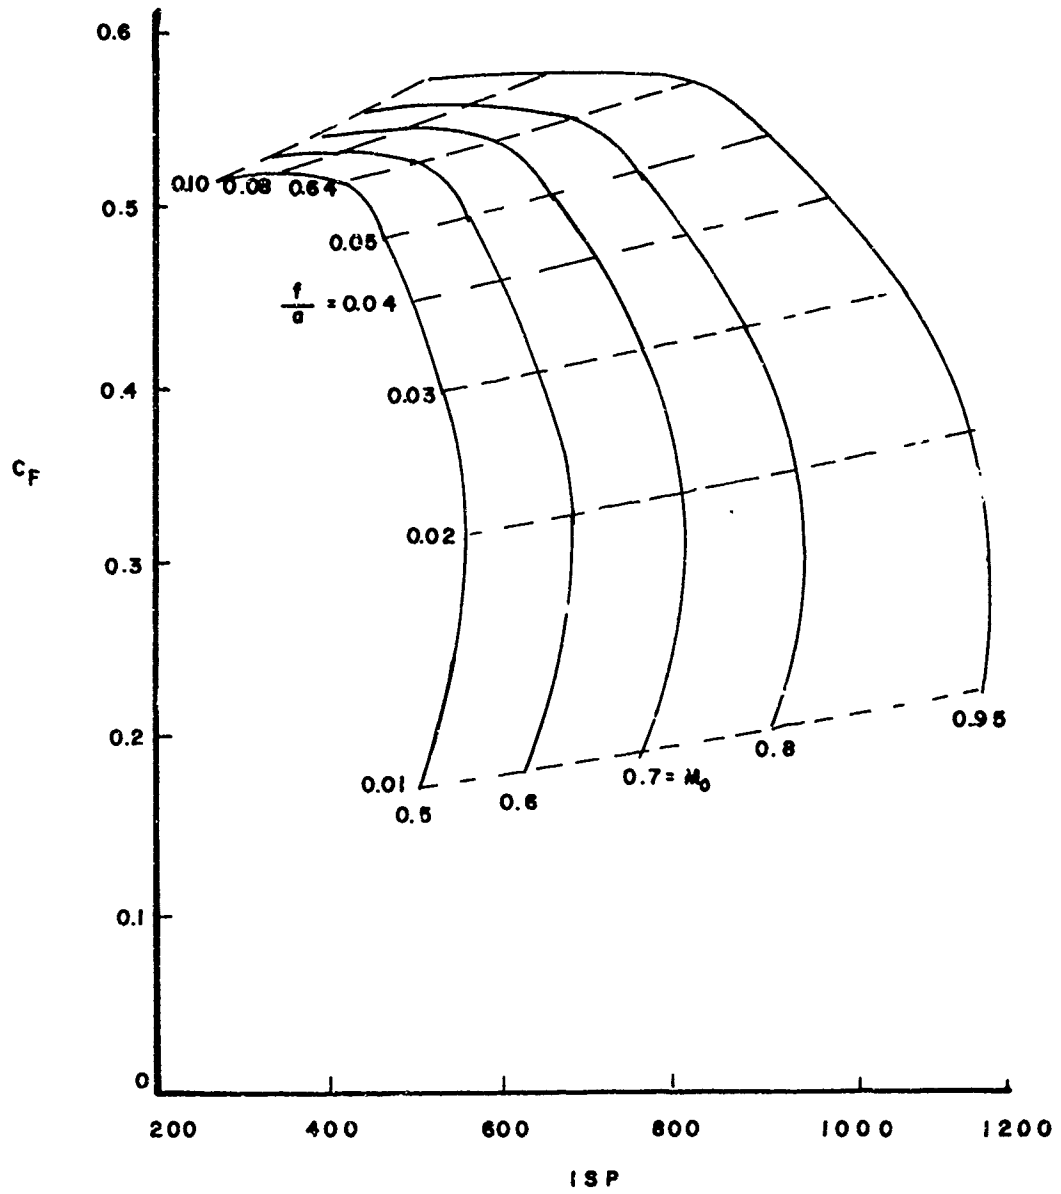


Figure 11. Propane-Fueled Ramjet Performance With  $C_{DB} = 4$  and  $\eta_c = 90\%$

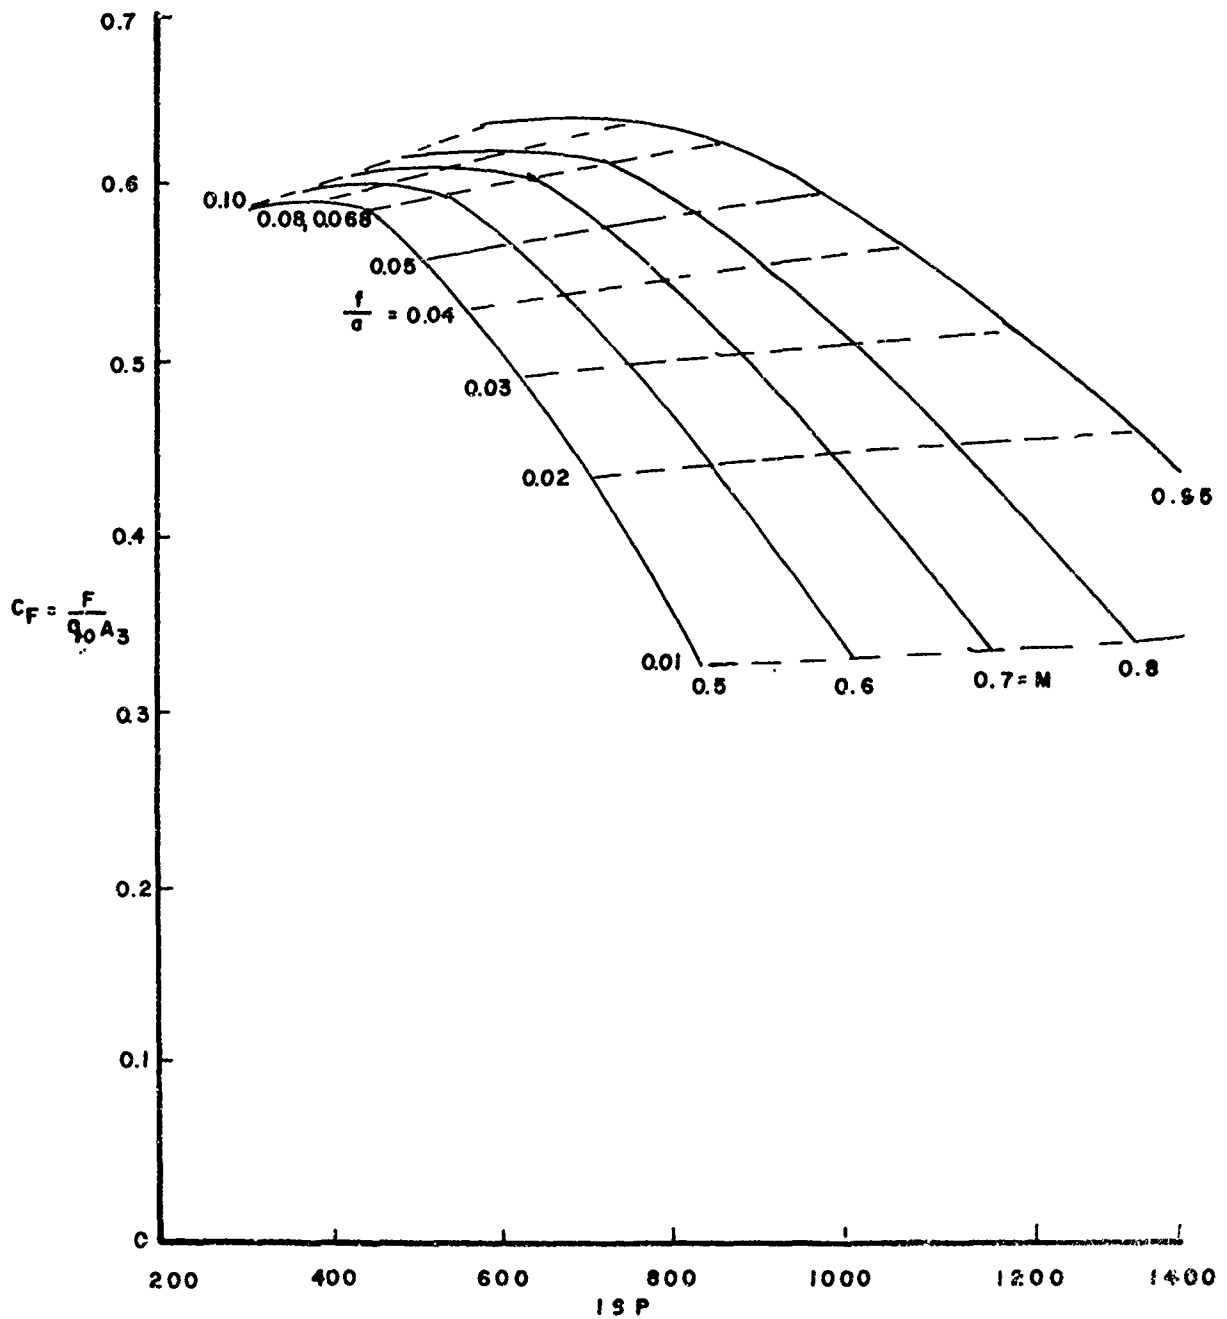


Figure 12. Ideal JP-4 Fueled Ramjet Performance

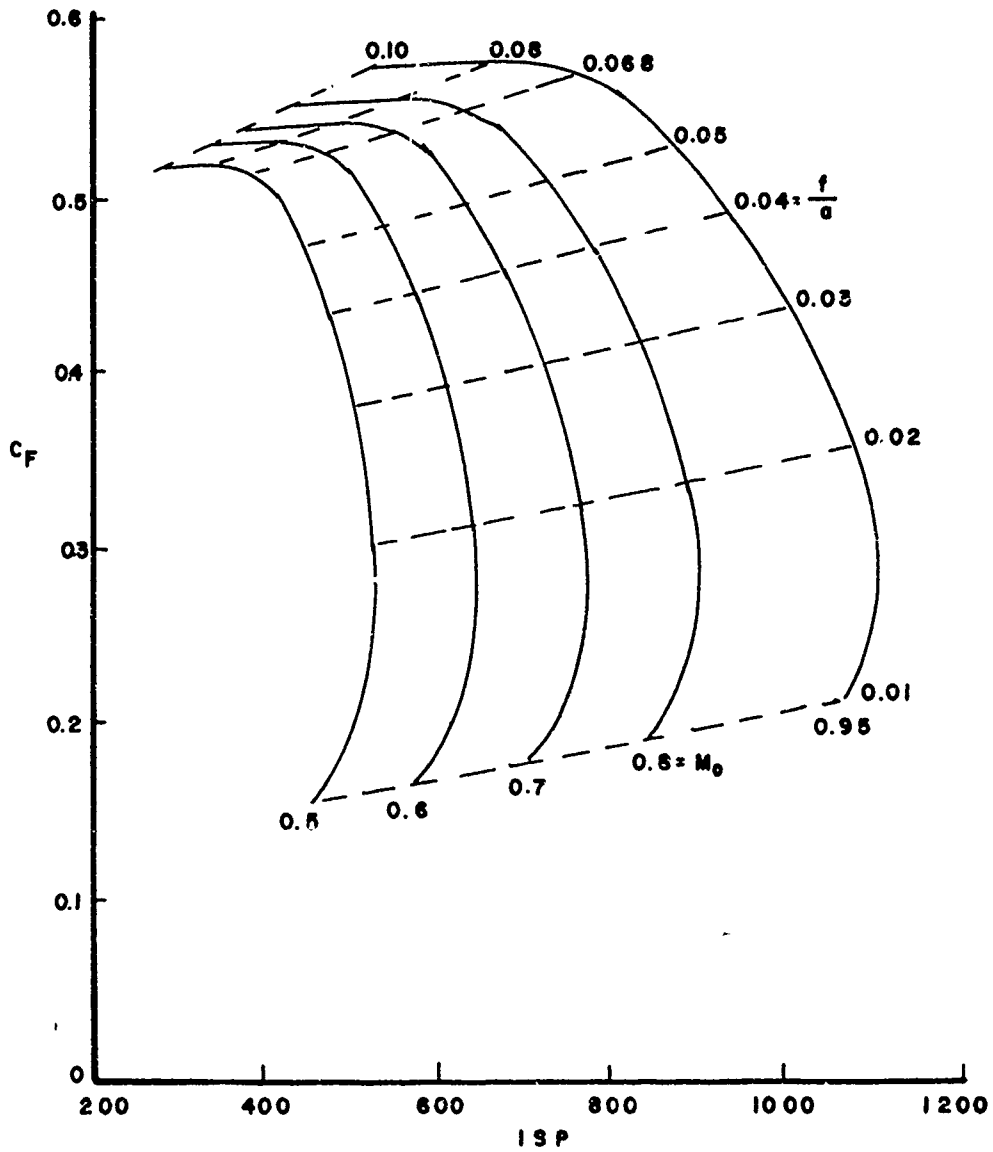


Figure 13. JP-4 Fueled Ramjet Performance With  $C_{DB} = 4$  and  $\eta_c = 90\%$



Design Point:  $M_0 = 0.95$ ,  $C_F = 0.5$ ,  $A_c/A_3 = 0.1976$

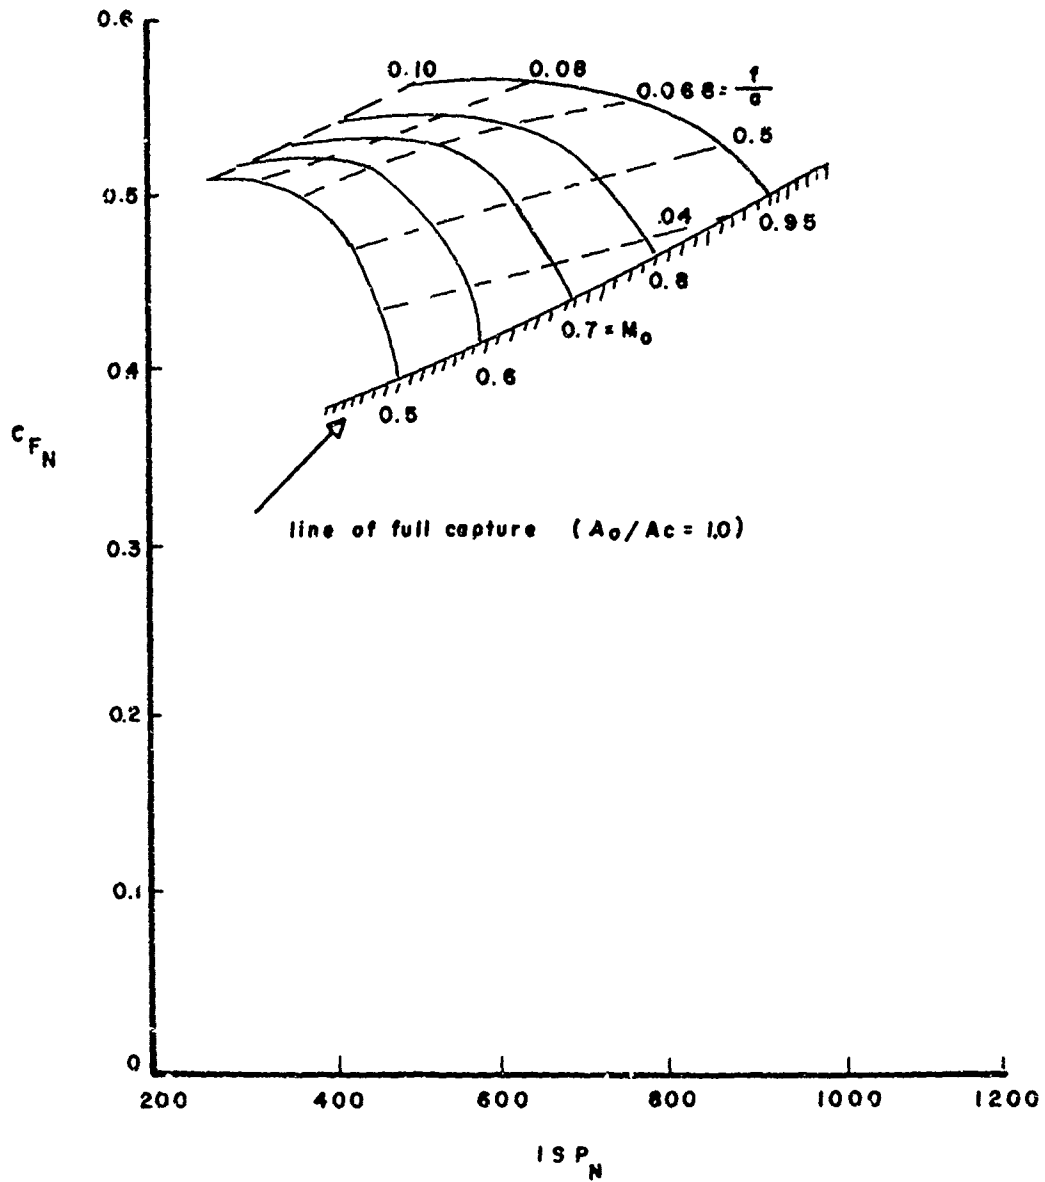


Figure 14. JP-4 Fueled Ramjet Performance With Additive Drag,  $C_{DB} = 4$ , and  $\eta_c = 90\%$

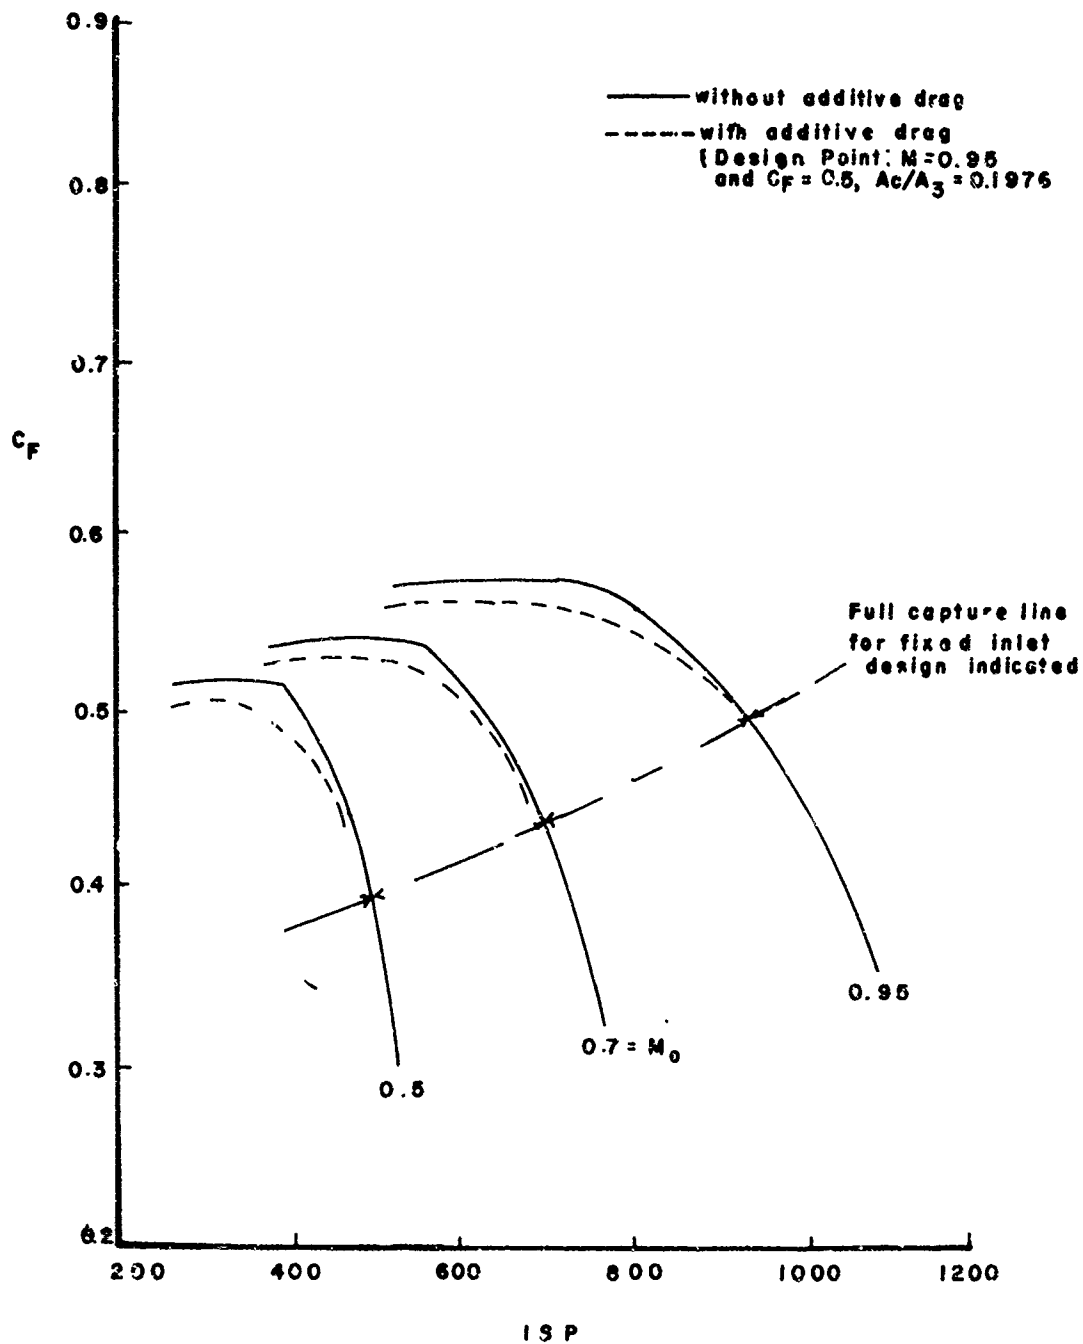


Figure 15. Effects of Additive Drag on JP-4 Fueled Ramjet Performance With  $C_{DB} = 4$  and  $\eta_c = 90\%$

SECTION V  
COMPARISONS

The ramjet and ejector ramjet performance parameters shown herein can be used for several comparison purposes only. The results are valid for the assumptions made. In general, an application requires that an engine operate over a wide envelope with fixed geometry, which necessitates considering additive drag. In addition, the external drag of the engine nacelle must be included, as well as any vehicle/engine interference drag. Without these specific effects, the following general comparisons can be reached.

Figure 16 compares the parametric performance of the ideal engines at Mach 0.7. The lowest point on each line is for  $f/a = 0.02$  and the highest point is for  $f/a = 0.1$ . As the fuel/air ratio increases, the thrust increases at a sacrifice in specific impulse. At the very low fuel/air ratios the performance is nearly identical. As the fuel/air ratio increases, the advantages of the ejector ramjet become apparent. The "X" mark on each line indicates a stoichiometric fuel/air ratio. Thrust levels below this mark indicate lean engine operation, and those above this mark indicate fuel rich operation.

The propane ramjet and the propane ejector ramjet can be compared in many ways. As noticed on the ramjet curves, the thrust maximizes at about the stoichiometric fuel/air ratios; richer mixtures are of no advantage to the ramjet. Comparing the ideal engines at this stoichiometric fuel/air ratio indicates that the ideal ejector ramjet has a thrust advantage of 18% and a specific impulse advantage of 11%. The ejector ramjet can increase thrust at a sacrifice in impulse by operating fuel rich; this is no advantage to the ramjet.

Let us compare the ejector ramjet operating at a  $f/a = 0.1$  and the ramjet operating at stoichiometric. For this case, the ejector ramjet has a thrust advantage of 37% but a specific impulse that is only 76% of that possible with the ramjet. Figure 17 shows the same comparisons at Mach 0.95. The same comparisons can be made from Figure 18 for  $C_{DB} = 4$  and  $\eta_c = 90\%$ . With both engines operating stoichiometrically, the ejector ramjet has a 17% thrust advantage and a 10% specific impulse advantage, slightly lower than for the ideal case. With the ejector ramjet operating at  $f/a = 0.1$  and the ramjet at stoichiometric, the ejector ramjet has a 35% thrust advantage but again at 76% of the ramjets' specific impulse.

If the ejector ramjet has the drag predicted from References 4, 5, and 6, and the ramjet has a  $C_{DB} = 4$  and  $\eta_c = 0.9$ , we obtain the following results. With both engines operating stoichiometrically, the ejector ramjet has an 8% thrust advantage and a 5% specific impulse advantage over the ramjet. With the ejector ramjet operating at  $f/a = 0.1$ , its thrust advantage over the ramjet is 21% but its specific impulse is only 65% that of the ramjet. Similar comparisons can be made at Mach 0.95 and 23,000 feet from Figure 19; it must be pointed out, however, that this comparison is made at a maximum thrust level and at a very low specific impulse level, which gives the maximum potential advantage to the ejector ramjet. For a cruise application a lean fuel/air ratio would likely be chosen to maximize specific impulse; at a condition of say  $f/a = 0.3$ , the advantage of the ejector ramjet is considerably reduced or even eliminated. For instance, at  $f/a = 0.3$ , the ramjet would produce 16% more thrust at 10% higher specific impulse. One parameter which

AFAPL-TR-72-7

is important to the effectiveness of the ejector ramjet is the ratio of the primary to the inlet air stream thrust. As this parameter increases, the ejector ramjet becomes more effective in its pumping action. Figure 20 is a plot of this stream thrust ratio versus fuel/air ratio for various flight mach numbers. As can be seen, this parameter increases with increasing fuel/air ratio; therefore, the pumping action of the ejector ramjet will be greater at the higher fuel/air ratios. This effectively increases the amount of air flowing through the engine, thus giving more thrust than is possible with the conventional ramjet at the higher fuel/air ratios.

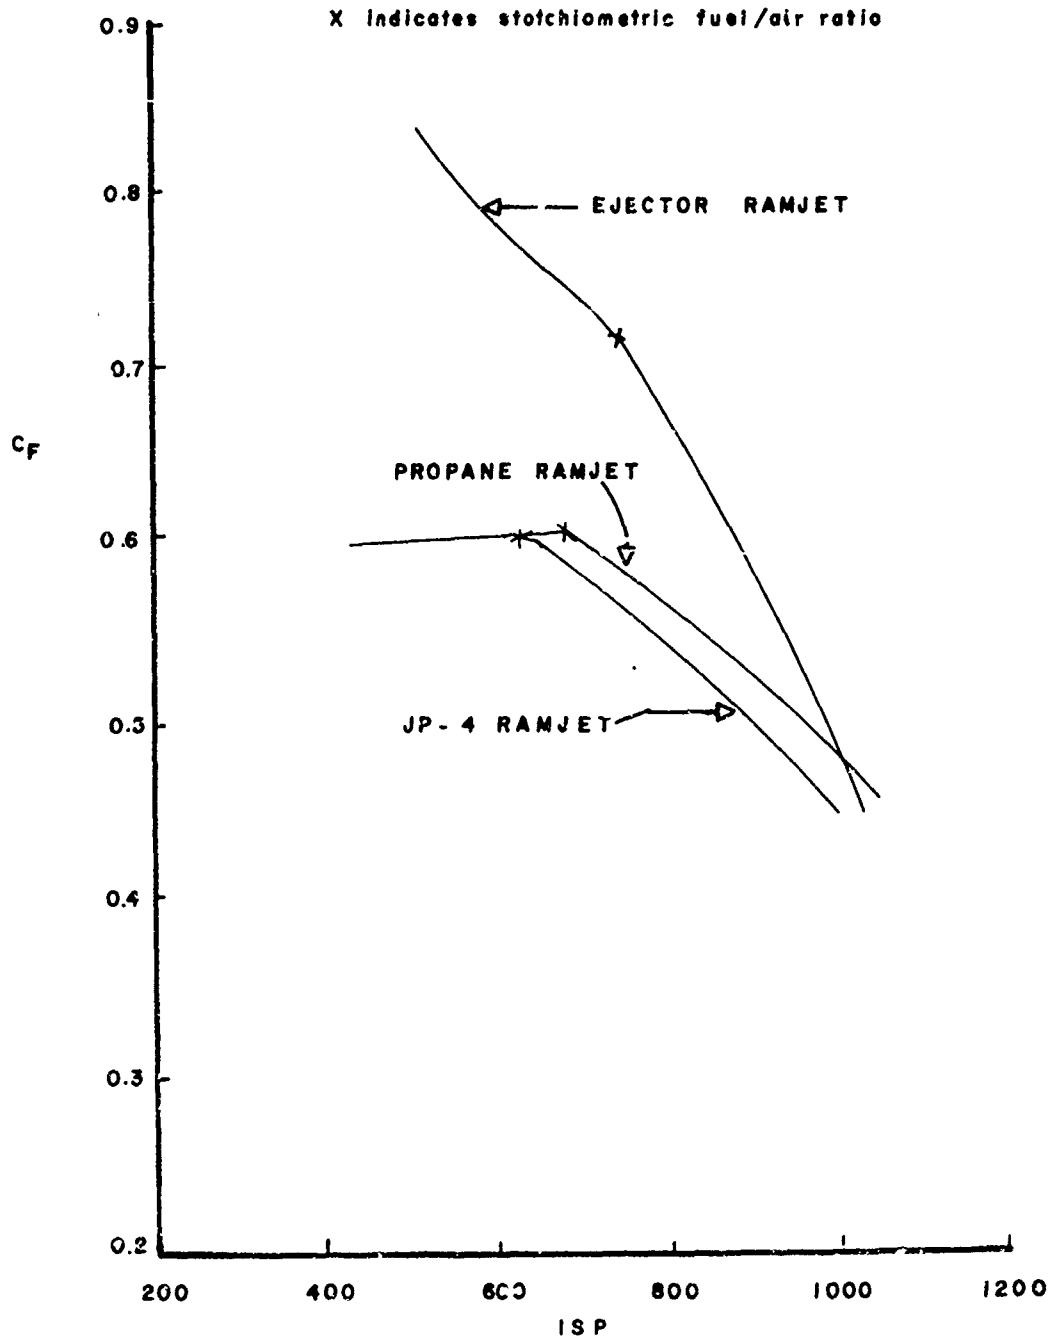


Figure 16. Comparison of the Ideal Engines at  $M_0 = 0.7$

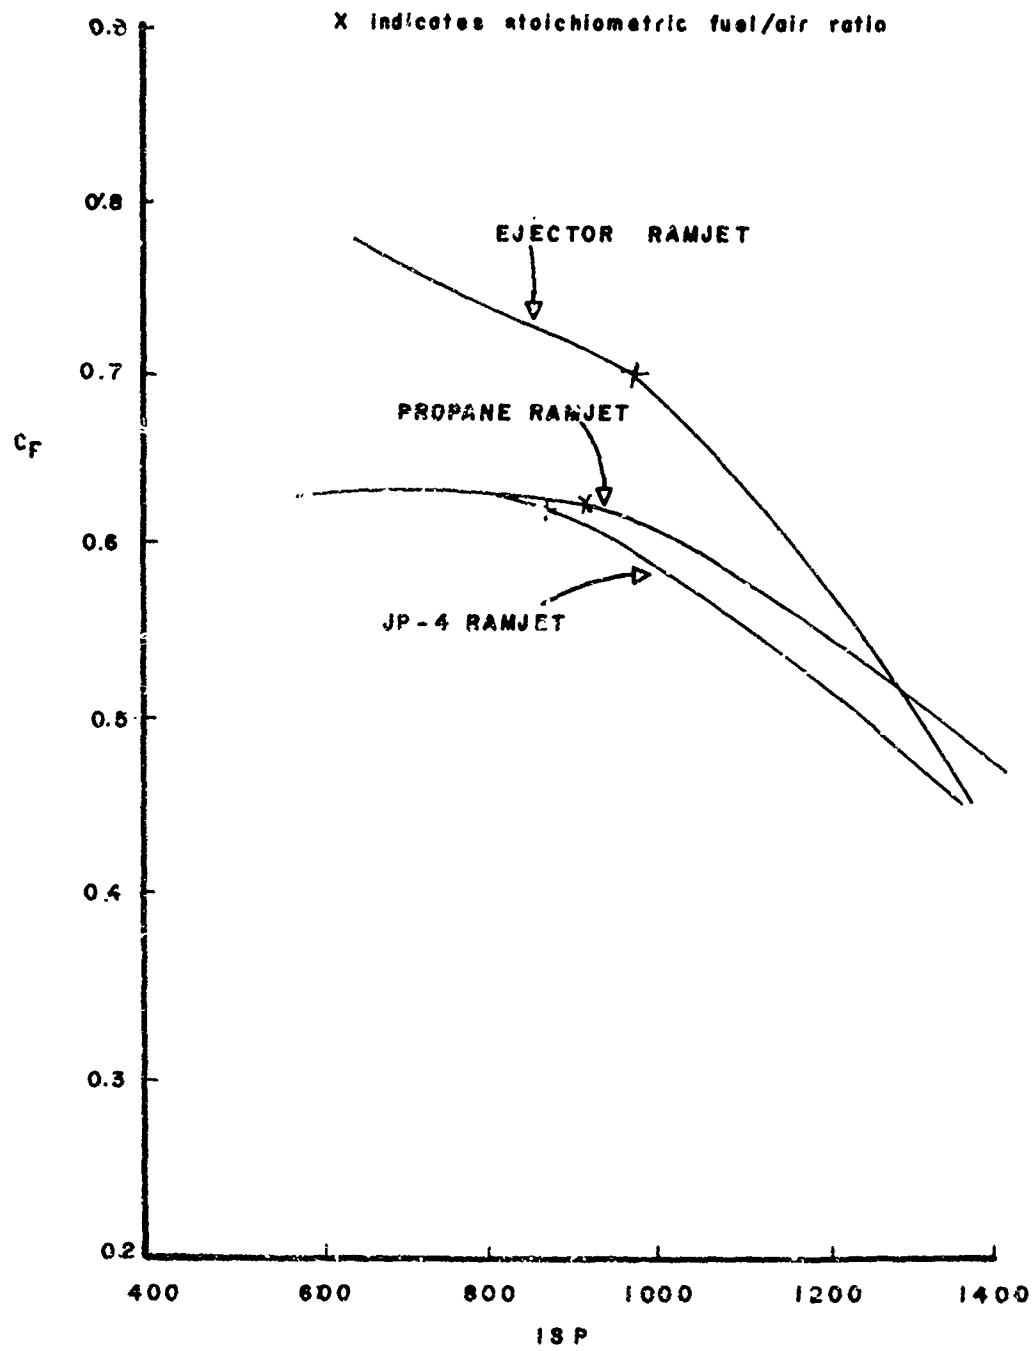


Figure 17. Comparison of the Ideal Engines at  $M_0 = 0.95$

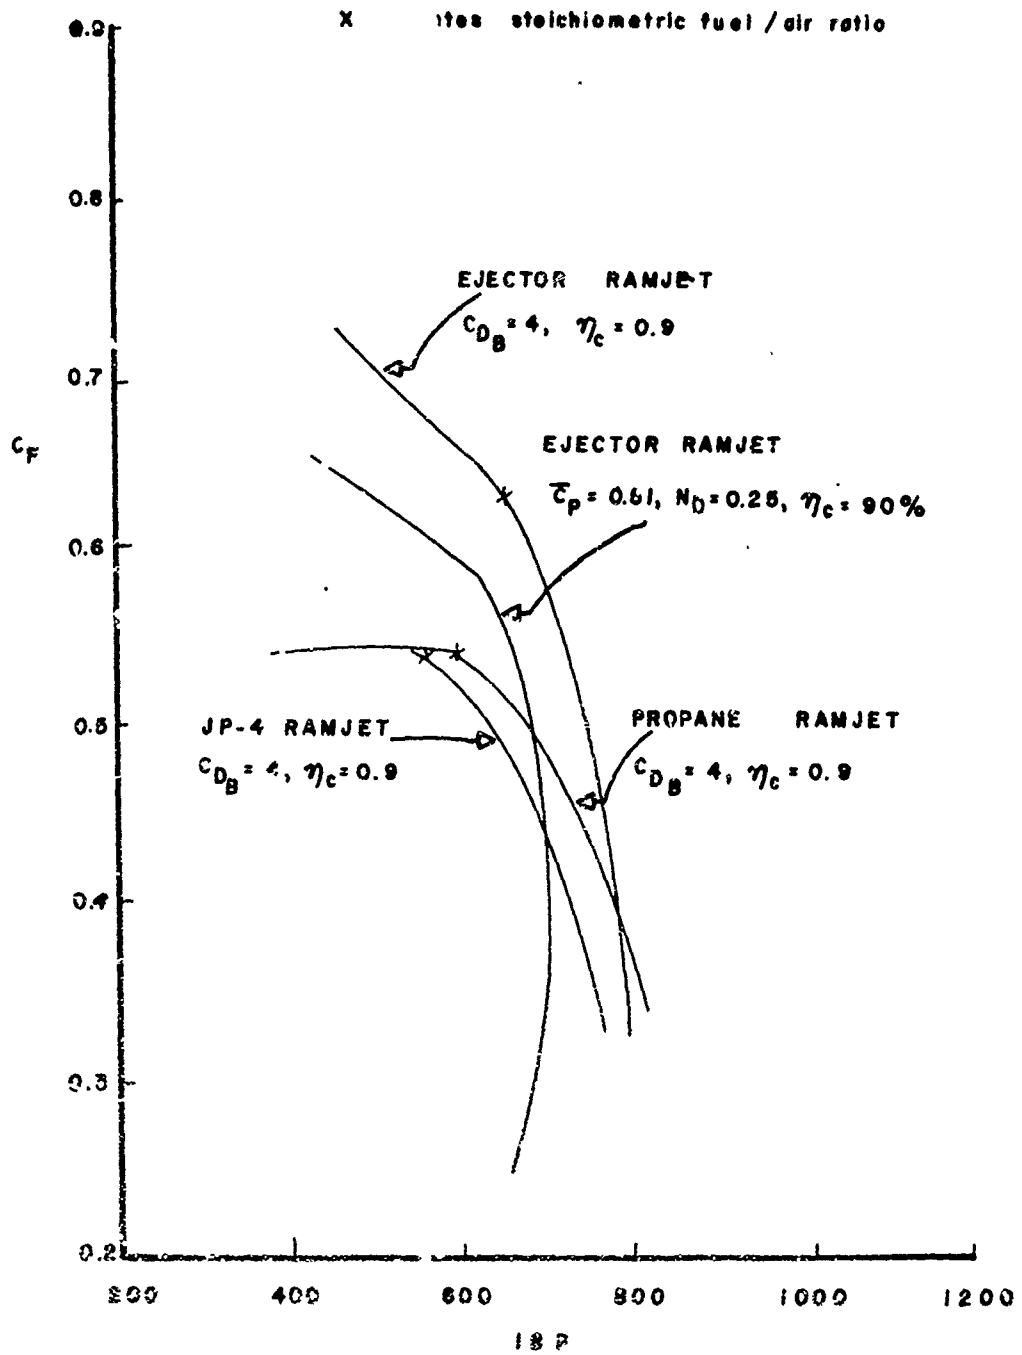


Figure 18. Comparison of the Engines With Efficiencies at  $M_0 = 0.7$



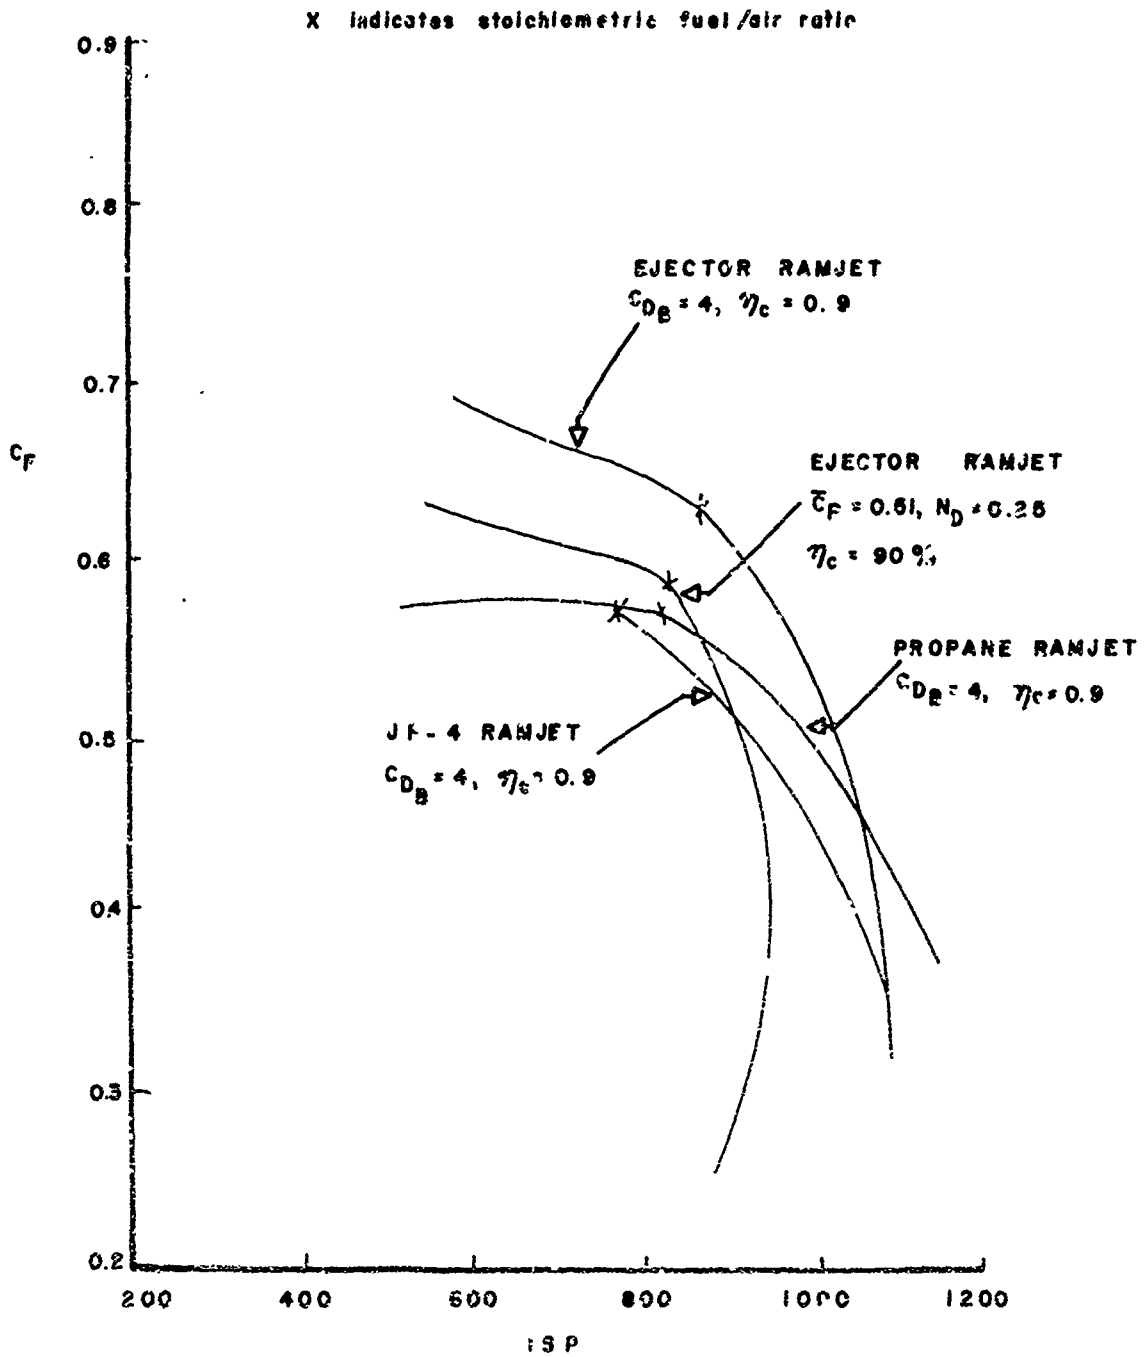


Figure 19. Comparison of the Engines With Efficiencies at  $M_0 = 0.95$

AFAPL-TR-72-7

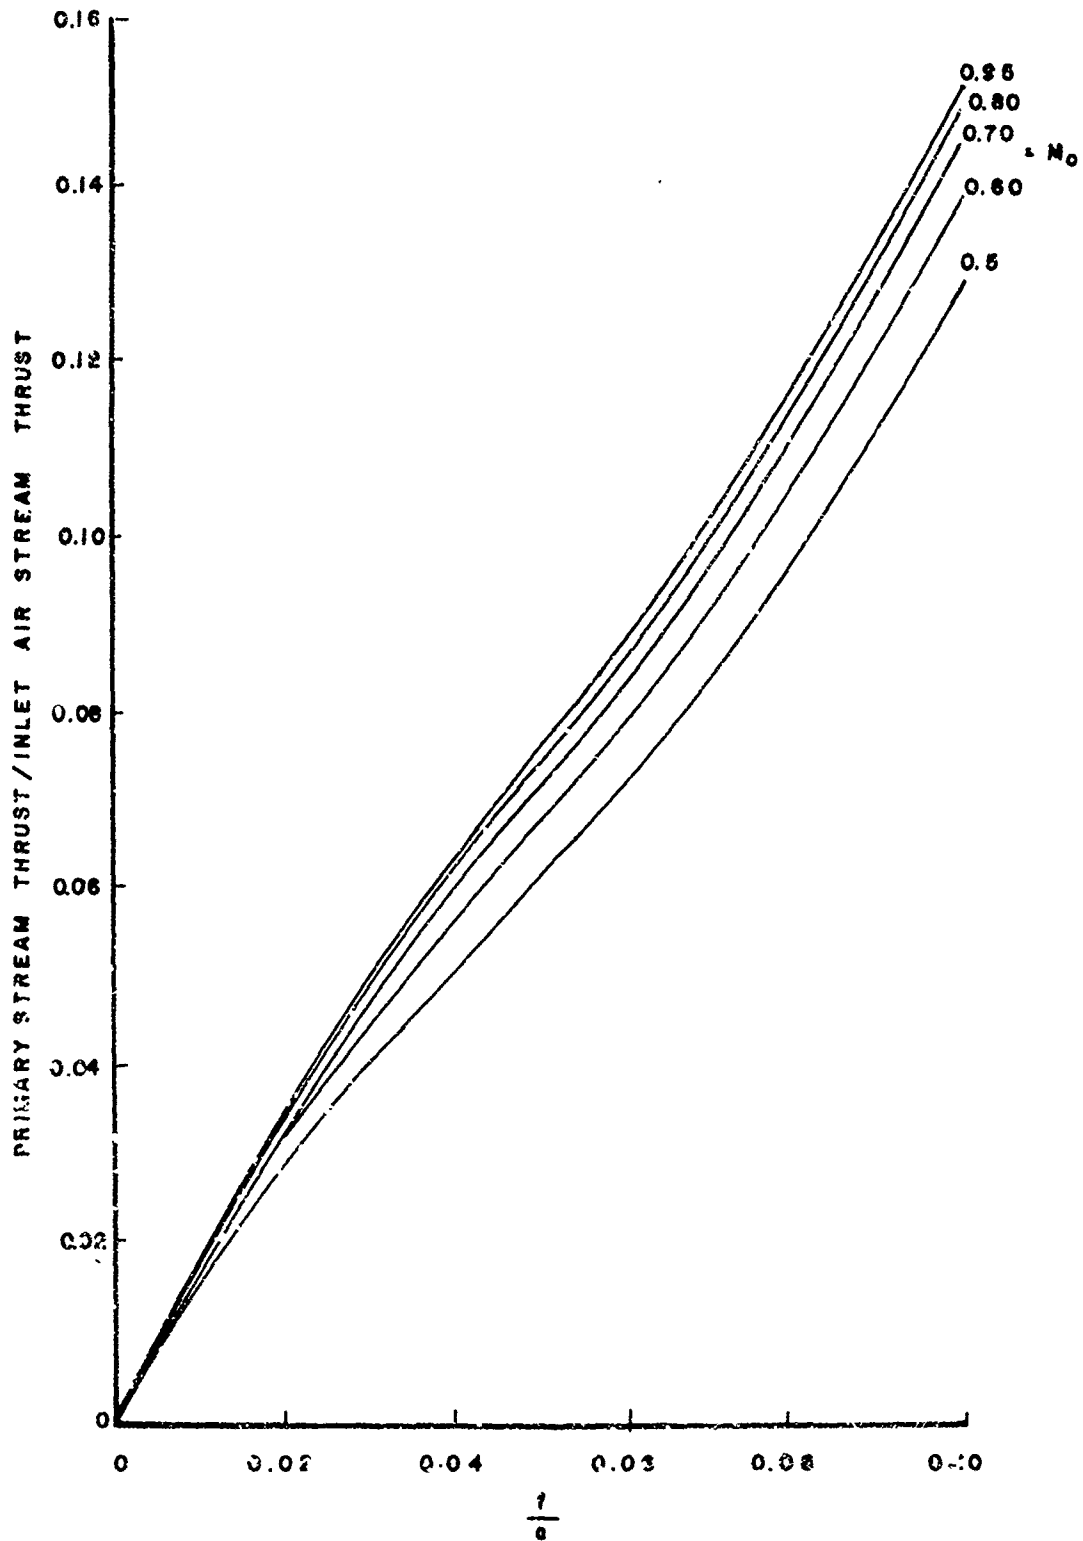


Figure 20. Ejector Ramjet Stream Thrust Ratio

SECTION VI  
CONCLUSIONS

The potential performance of the ejector ramjet and the conventional ramjet have been determined. At high fuel/air ratios, the ejector ramjet has a thrust advantage over the conventional ramjet. The relative ranking of these two engine systems can change drastically, however, depending on the internal flow losses and combustion efficiency assumed in the analysis. In addition, the relative advantage changes greatly with the fuel/air ratio considered. The assumptions of  $C_{DB} = 4.0$  and  $\eta_c = 0.90$  for the ramjet are considered as state-of-the-art values for JP-fueled ramjets. The ejector ramjet losses assumed from References 3, 4, and 5 are considered representative, although data from a real engine of this type is lacking. Predictions of internal drag in References 3, 4, and 5 are based on experimental data. Comparing these cases shows that the ejector ramjet has an advantage at the high fuel/air ratios and the conventional ramjet has an advantage at the low fuel/air ratios. The reason for this difference is that with large fuel/air ratios the ejector pumping action is greater and the cycle pressure is increased, while at the lower fuel/air ratios the ejector pumping action is less. This is directly related to the momentum ratio of the ejector to the inlet air stream which increases as the fuel/air ratio increases.

The data contained in this section is parametric, with no fixed inlet size. A real engine with a known capture area will have an actual thrust lower than that estimated herein when additive drag and external

AFAPL-TR-72-7

drag are included. This was illustrated in Section IV for one particular design point. This thrust decrement should affect each engine similarly, however, and should not change the relative ranking derived from this comparison.

APPENDIX I  
ENGINE PERFORMANCE COMPUTER PROGRAM  
INPUT AND OUTPUT PROCEDURES

For ease of operation, the data read into the program has been divided into four sets: (1) the fuel data set, which contains the tables of gamma, molecular weight, and temperature rise for the combustion products as a function of initial temperature and fuel-air ratio; (2) the engine geometry and the efficiency parameters, initial values of which are built into the program; since this set of data is entered in Namelist form, only those parameters having values different from the initial values need be entered; (3) flight parameters at which the engine is to operate, including the Mach numbers, altitudes, and fuel-air ratios for which engine performance is to be calculated; (4) the job title and the job code. The order of the first three data sets in the data deck is not fixed, but the fourth set must appear last.

Each data set is identified by a key word which alerts the program that the following data belongs to a particular data set. The key words corresponding to the above four data sets are: FUEL, GEOMETRY, RANGE, and PROBLEM. Each key word must start in column one. Tables I through IV display the form of all the input data cards.

Table I shows the format for the fuel card set. Card 1 contains the word, FUEL, starting in column one. Nothing else appears on this card. Card 2 contains two numerical values: the number of fuel-air ratios to be entered later in columns 1-10, and the number of initial

air total temperatures in columns 11-20. Card 3 gives the list of fuel-air ratios, starting in column 11, with six numbers per card; up to three cards may be required. The first ten and the last ten columns of these cards are reserved for identification data. (This identification data is not used by the computer.) The other lists of data in this set are entered on the same format. Each list begins on a new card.

Table II shows the variables that are entered on a Namelist card. A description of this type of data entry is given in the Fortran Extended manual.

Table III shows the format for the flight parameters. Card 1 contains the word, RANGE, starting in column one. The second card contains the number of Mach numbers, number of altitudes, and the number of fuel-air ratios. Ten spaces are allotted per number, starting in column one. The third card contains the list of Mach numbers, where each number is allotted ten spaces. The other two lists are similar, except that the fuel-air ratio list may require more than one card to complete the list. Figure 21 shows a typical data deck.

The printed output from the program gives the cycle performance and many engine parameters. Line 1 shows the problem title and the altitude. Line 2 shows the capture area in square feet, the conventional thrust in pounds, the corresponding thrust coefficient, specific impulse, specific fuel consumption, fuel-air ratio, and the flight Mach number. Line 4 shows the values of thrust in pounds, thrust coefficient, specific impulse, and specific fuel consumption, which have been corrected for

AFAPL-TR-72-7

additive drag. Line 5 presents the engine stations and serves as a title for the data immediately below. Column titled E presents data for the exit of the ejector, which is used only for ejector ramjet problems. Line 6 gives the Mach number at each station. Line 7 presents some of the important values of gamma that were used. Line 8 shows the flow area in square feet at each engine station. Line 9 shows the pressure in atmospheres at each engine station. Line 10 shows the total pressure in atmospheres at some of the engine stations. Line 11 gives the total temperature in °R at some of the important engine stations. Line 12 shows the stream thrust in pounds force for some stations. Line 13 shows the molecular weight at two stations. Finally, the last line shows a convergence parameter titled cycle, the free stream pressure in  $\text{lbs/ft}^2$ , the pressure at the engine exit in  $\text{lbs/ft}^2$ , the air flow rate in  $\text{lbs/sec}$ , and the fuel flow rate in  $\text{lbs/sec}$ . A sample output is shown in Figure 22.

TABLE I - FUEL CARDS

Card Order	Contents	Format
1	FURL	A10
2	Number of fuel-air ratios (max value - 18) Number of initial air temps (max value - 12)	2I10
3	List of fuel-air ratios	10X,6E10.0
4	List of initial air temperatures	10X,6E10.0
5	List of temperature rise data corresponding to the fuel-air ratios and the initial air temperatures.	10X,6E10.0
6	List of molecular weight data corresponding to the fuel-air ratios and the initial air temperatures.	10X,6E10.0
7	List of gammas corresponding to the fuel-air ratios and the initial air temperatures.	10X,6E10.0



TABLE II - VARIABLES IN GEOM NAMELIST

The key word GEOMETRY precedes the namelist data. This word is read in on a A10 format.

Variable	Type	Value Before Read	Definition & Comments
A1	R	1.23	Area of station 1 in sq. ft.
ASTAR	R	0.00753	Area of ejector throat, sq. ft.
AE	R	0.030121	Area of the ejector exit, sq. ft.
A2	R	1.2601	Area of station 2 in sq. ft.
A3	R	5.2414	Area of station 3 is sq. ft.
A5	R	2.8852	Area of station 5 in sq. ft.
DUMPLØS	L	FALSE	Calculate diffuser & dump losses if true
ETAf2	L	FALSE	Use a fraction, ETAMIX, of the ideal momentum at station 2 if true
ETAfE	L	FALSE	Use a fraction, ETAMIX, of the ideal ejector momentum if true
ETAMIX	R	0.0	Mixing efficiency
TTF	R	1300.0	Total temperature of ejector flow in °R
A2P	R	2.52	Area of station 2' in sq. ft.
ND	R	0.25	Dump loss parameter
CPR	R	0.51	Diffuser performance parameter
CDB	R	0.0	Burner drag coefficient
nc	R	1.0	Combustion efficiency

TABLE III - FLIGHT PARAMETERS

Card Order	Contents	Format
1	RANGE	A10
2	Number of Mach numbers (Max - 8) Number of altitudes (Max - 4) Number of fuel-air ratios (Max - 20)	3I10
3	List of Mach number	8E10.0
4	List of altitudes	4E10.0
5	List of fuel-air ratios	8E10.0

TABLE IV - ENGINE IDENTIFICATION DATA

Card Order	Contents	Format
1	PROBLEM	A10
2	Job title and job code (For an ejector ramjet the job code is any integer less than or equal to 0. For a ramjet use any integer greater than 0.) (The job title can be any comment the user wishes to make)	12A6,I8

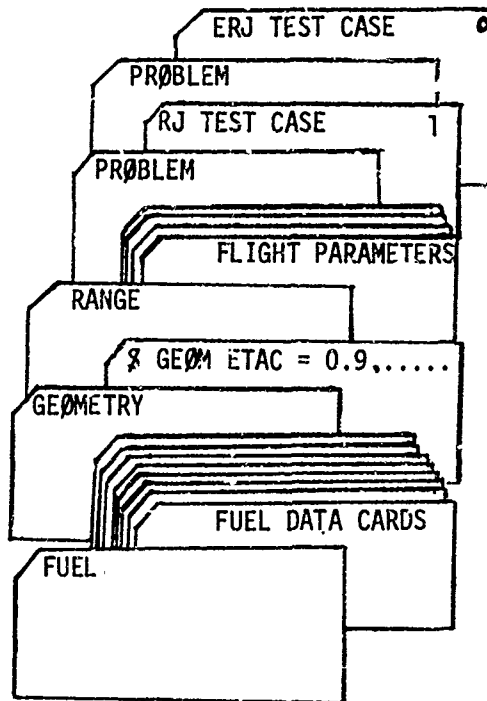


Figure 21. Typical Data Deck

MOMENTUM COMPRESSION RJ CHECKOUT.

ALT = 23000.0

AO	THRUST	CF	ISP	SFC	FAR	AMO
.9401E+00	.3537E+03	.4499E+00	498.9458	7.2152	.0400	.50
ADDITIVE DRAG	.3411E+03	.4339E+00	481.1822	7.4816		

STATION	0	1	2	3	4	5	E
Mach	.5000	.3558	.3909	.0893	.2280	.4506	2.4316
Gamma			1.3837		1.2659		1.0689
Area-sq.ft.	.9401E+00	.1230E+01	.1260E+01	.5241E+01		.2885E+01	.3012E-01
Pres-ATM	.4051E+00	.4402E+00	.4395E+00	.4691E+00	.4565E+00	.4051E+00	.1518E+00
TOTP-ATM	.4805E+00		.4878E+00	.4717E+00	.4599E+00		.2694E+01
TCIT-°R	.459E+03		.5382E+03		.2834E+04		
Stream-LBF		1349.0719	1419.9204			3109.1281	70.8485
Mol Wt			29.352		28.614		

C.C.E = -.98159E-06    PO = .857244E+03    P5 = .357245E+03    WA = .1772E+02    WF = .7090E+00

Figure 22. Sample Output

AFAPL-TR-72-7

APPENDIX II  
PROGRAM LISTING

IN M0MCRJ

CDC 6600 FYN V3.0-251A OPT=1 07/15/71

```

PROGRAM M0MCRJ (INPUT, OUTPUT, TAPE5=INPUT, TAPE6=OUTPUT)
REAL NO
EXTERNAL CYCLE, DUMAG, AINLET, BINLET
LOGICAL DUMPLOS, RJ, TRAP, ETAF2, ETAFE
DIMENSION AAMP(1), AALT(4), AFAR(20), TITLE(12)
COMMON /CYCL/ A5, F5, RJ, IT4, GAM4, WM4, T70, ETAC
COMMON /GUMA/ AM3, CDB, Y4P
COMMON /ATNLT/ A1, AC, AE, ASTAR, A10, AM1, AM3CK, DUMPLOS,
1 ETAMIX, ETAF2, ETAFE, FAR, GANT, INKI, PD, PTO, TC, TTF
COMMON/DUM/ A2, A3, AMY, AM2, F2, GAM2, PT3, IT2, WA, WF, A2P, CPR, NO
NAMLIST/GEOM/ DUMPLOS, ETAF2, ETAFE, ETAMIX, TTF, A1, ASTAR,
1 AE, A2, A3, A5, A2P, CPR, NO, CDB, ETAC
DATA FUE/4HFUEL/, GFO/8HGEOMETRY/, PANG/5HRANGE/, PROB/7HPROBLEM/
ETAF2 = .FALSE.
ETAFE = .FALSE.
DUMPLOS = .FALSE.
TTF = 1300.0
A2P = 2.52
ETAMIX = 1.0
CPR = 0.51
NO = 0.25
CDB = 0.0
ETAC = 1.0
A1 = 1.23
ASTAR = 0.00753
AF = 0.030121
A2 = 1.2601
A3 = 5.2414
AF = 2.8452
AMOLA = 1.0/28.966
1 READ (F,2) WORD
2 FORMAT (A10)
WRITE (6,3) WORD
3 FORMAT (1H A10)
IF (WORD .EQ. FUE) GO TO 10
IF (WORD .EQ. GFO) GO TO 20
IF (WORD .EQ. PANG) GO TO 111
IF (WORD .EQ. PROB) GO TO 701
WRITE (6,25)
25 FORMAT (10H STOP PROB)
GO TO 1000
10 CALL FUELQAT(0.0, 0.0, 0.0, 0.0, 0.)
GO TO 1
20 READ (5,GFOH)
GO TO 1
111 READ (F,1110) NUMAM0, NUMALT, NUMFAR
1110 FORMAT (3I10)
READ (5,700) (AAM0(I), I=1,NUMAM0)
READ (5,700) (AALT(I), I=1,NUMALT)
READ (5,700) (AFAR(I), I=1,NUMFAR)
GO TO 1
700 FORMAT (A510.0)
701 READ (5,112) (TITLE(I), I=1,12), ICODE
112 FORMAY (12A6, 18)
IF (EOF(5)) 1000, 1002

```

Reproduced from  
best available copy.

AM MCHCRJ

COC 6600 FTN V3.0-251A OPT=1 07/15/71

```

1002 CONTINUE
      RJ = .FALSE.
      IF (ICODC .GT. 0) RJ = .TRUE.
      DO 705 J1 = 1, NUMALT
        ALT = AALT(J1)
        CALL ATMOS (ALT, T0, DADSL, RHO, TATS, PAPSL, C, VIS, 1)
        P0 = PAPSL*144.0*14.696
      DO 705 J2=1,NUMAME
        AM0 = AAM0(J2)
        T0 = T0*TR(1.4, AM0)
        WRITE (6,13)
13      FORMAT (1H0 13(10H* * * ))
        P0 = P0*(1.0 + 0.2*(AM0**2))**3.5
        IF (RJ) GO TO 15
        TTHRAT = TTF*0.83/1.8
        CALL PPOPAN (TTHRAT, CPF, HPAKF)
        GAMT = CPF/(CPF - 1.987)
        TC = TTF/1.8
        CALL PPOPAN (TC, CPC, HTF)
        TAIR = T0/1.8
        CALL AIRTRP (TAIR, CPA, HAIR)
        HTA = HAIR + (28.966*(C*AM0)**2)/(2.0*32.2*778.16*1.8)
15      DO 705 J3=1,NUMFAR
        FAR = AFAR(J3)
        CALL FUELINT (T0, FAR, DT, WTM4, GAM4)
        TT4 = T0 + ETAC*DT
        IF (RJ) GO TO 408
        AMOLF = FAR/44.0
        TK2 = 350.0
        HT2 = (AMOLA*HTA + AMOLF*HTF)/(AMOLA + AMOLF)
        DO 201 I=1,3
        CALL PPOPAN (TK2, CPF, H)
        CALL AIRTRP (TK2, CPA, HI)
        CP = (AMOLA*CPA + AMOLF*CPF)/(AMOLA + AMOLF)
        TK2CK = HT2/CP + 300.0
        TCHEK = TK2CK - TK2
201      TK2 = TK2CK
        TT2 = TK2*1.8
        AWT = (1.0 + FAR)/(AMOLA + AMOLF)
        GAM2 = CP/(CP - 1.987)
498      ACLOW = 0.1*A3
        IF (.NOT. RJ) GO TO 489
        A1 = A2
        AWT = 28.966
        TT2 = TT0
        GAM2 = 1.4
489      ACHIGH = A1
        X5 = X(GAM4, 1.0)
        X4 = X5*A5/A3
        AM4 = XM(X4, GAM4)
        Z4 = Z(GAM4, AM4)
        Y4 = Y(GAM4, AM4)
        Y4P = Y4*SQRT(WTM4+TT2/(AWT+TT4*GAM2))
        IF (RJ) Y4P = Y4P/(1.0+FAR)
        CALL SOLNFH (BUMAC, 0.0, AM4, TRAP, Y1)

```

3H MOMCRJ

CDC 6500 FTN V3.0-251A OPT=1 07/15/71

```

      AM3 = Y1
      ACT = A3*X(1.4, AM3)/X(1.4, AM0)
      IF (RJ) GO TO 36
      INKT = 0
      ACH = A1
      ACL = A1/2.0
      CALL SOLNEW (BINLET, ACH, ACL, TRAP, Y1)
      IF (.NOT. TRAP) GO TO 460
      WRITE (6, 14)
34    FORMAT (20H0BINLET - TRAP= TRUE)
      GO TO 240
460   ACMAX = AC
      ACL = 0.75*ACT
      IF (ACL .GT. ACMAX) ACL = 0.75*ACMAX
      INKT = 5
      CALL SOLNEW (AINLET, ACMAX, ACL, TRAP, Y1)
      IF (.NOT. TRAP) GO TO 17
      WRITE (6, 15)
35    FORMAT (13H TRAP IS TRUE)
      GO TO 240
17    IF (INKT .GT. 1) GO TO 37
      IF (AM3CK .GE. AM3) GO TO 37
      ACHIGH = ACMAX
      GO TO 499
36    PT3 = PT0
37    Z3 = Z(GAM2, AM3)
      PT4 = PT3*(Z3/74 - 0.5*COB*GAM2*AM3**2/(Z4*PR(GAM2, AM3)))
      P5 = PT4/PR(GAM4, 1.0)
      IF (.NOT. RJ) ACT = AC
      IF (P5 .LT. P0) GO TO 497
      CALL CYCLE (ACT)
      GO TO 240
497   ACHIGH = ACT
499   CALL SOLNEW (CYCLE, ACLOW, ACHIGH, TRAP, YNEW)
      IF (.NOT. TRAP) GO TO 240
      WRITE (6, 500)
500   FORMAT (1H0, 5X, 11HTRAP = TRUE)
240   Z0 = Z(1.4, AM0)
      P0 = PT0*AC*Z0
      Z1 = Z(1.4, AM1)
      F1 = PT0*A1*Z1
      Y-RUST = F5 - F0 - P0*(A5-AC)
      THRUSTN = F5 - F1 - P0*(A5-A1)
      FISP = THRUST/NF
      FISP = THRUSTN/NF
      SFC = 3600.0/FISP
      SFCN = 3600.0/FISP
      DEN = 0.5*1.4*P0*A3*AM0**2
      CF = THRUST/DEN
      CFN = THRUSTN/DEN
      WRITE (6, 300) (TITLE(I), I=1,12), ALT, AC, THRUST, CF, FISP,
2     SFC, FAR, AM0, THRUSTN, CFN, FISP, SFCN
300   FORMAT(1H0/1H012A6,15X,4HALT=,F10.1/1H 8X,2HA0,12X,5HTHRUST,
1 11X,2HCF,13X,3HISP,12X,3HSFC,14X,3HFAR,12X,3HAM0/
2 1H 3515.4,3F15.4,F15.2/14H ADDITIVE DRAG,2E15.4,3F15.4)

```



AM MOMCRJ

CDC 6600 FTN V3.0-252A OPT=1 07/15/71

```
FUN = NCYCLE (0.0)  
705 CONTINUE  
GO TO 1  
1000 STOP  
END
```

ION CYCLE

CDC 6600 FTN V3.J-251A OPT=1 07/15/71

```

FUNCTION CYCLE (ROOT)
  LOGICAL RJ, NSOL, DUMPLOS, ETAF2, ETAFE
  COMMON /CYCL/ A5, F5, RJ, TT4, GAM4, WTM4, TTO, ETAC
  COMMON /BUMA/ AM3, COB, Y4P
  COMMON /AINLT/ A1, AC, AE, ASTAR, AM0, AM1, AM3CK, DUMPLOS,
1 ETAMIX, ETAF2, ETAFE, FAR, GAMT, INKT, PO, PTO, TO, TTF
  COMMON /DUM/ A2, A3, AMT, AM2, F2, GAM2, PT3, TT2, WA, WF, A2P, CPR, ND
1 AC = ROOT
  X1 = AC*X(1.4, AM0)/A1
  AM1 = XM(X1, 1.4)
  P1 = PTO/PR(1.4, AM1)
  WA = PC*AC*AM0*SQRT((1.4*32.2*28.966)/(1545.264*TO))
  FA1 = PTO*A1*Z(1.4, AM1)
  WF = WA*FAR
  IF (.NOT. RJ) GO TO 5
  AM2 = AM1
  F2 = FA1
  GO TO 5?
5 XSTAR = X(GAMT, 1.0)
  PTP = (WF*SQRT((TTF*1545.264)/(32.2*44.0)))/(ASTAR*XSTAR)
  PTH = PTP/PR(GAMT, 1.0)
  IF (PTH.LT.P1) GO TO 10
  XE = XSTAR*ASTAR/AE
  AME = SMX (XF, GAMT)
  FE = PTP*AE*Z(GAMT, AME)
  GO TO 15
10 AME = WF/(P1*AF*SQRT(GAMT*32.2*44./ (1545.264*TTF)))
  FE = P1*AE*(1.0+GAMT*(1/ME**2))
  PTP = P1*PR(GAMT, AME)
15 F2 = FA1 + FE
  IF (ETAF2) F2 = ETAMIX*F2
  IF (ETAFE) F2 = FA1 + ETAMIX*FE
  Y2 = ((WA + WF)*SQRT(TT2*1545.264/(32.2*AMT)))/F2
50 AM2 = YM(Y2, GAM2)
52 Z2 = Z(GAM2, AM2)
  X2 = X(GAM2, AM2)
  IF (RJ) GO TO 56
  IF (DUMPLOS) GO TO 57
56 X3 = X2*A2/A3
  PT3 = ((WA+WF)*SQRT(TT2*1545.264/(32.2*AMT)))/(A3*X3)
  IF (RJ) PT3 = (WA*SQRT(TT2*1545.264/(32.2*AMT)))/(A3*X3)
  GO TO 58
57 CALL DUMP (Z2, X3)
58 AM3 = XM (X3, GAM2)
  Y3 = Y (GAM2, AM3)
  Z3 = Z (GAM2, AM3)
  P3 = PT3/PR(GAM2, AM3)
  P3ATM = P3/(144.0*14.696)
70 Y4 = Y3*SQRT(AMT*TT4/(WTM4*TT2))
  Y4 = Y4*(1.0 + GAM2*AM3**2)/(1.0+GAM2*AM3**2*(1.0-0.5*COB))
  IF (RJ) Y4 = Y4*(1.0+FAR)
  AM4 = YM(Y4, GAM4)
  X4 = X(GAM4, AM4)
  X5 = X4*A3/A5
  AM5 = YM(X5, GAM4)

```

Reproduced from  
best available copy.

```

ION CYCLE CDC 6500 FTN V3.0-251A OPT=1 07/15/71
Z4 = Z(GAM4, AM4)
PT4 = PT3*(Z3/Z4 - 0.5*COB*GAM2*AM3**2/(Z4*PR(GAM2,AM3)))
P5 = PT4/PR(GAM4,AM5)
Z5 = Z(GAM4, AM5)
F5 = Z4*AM5*Z5
CYC = 1.0 - P5/P0
GO TO 300
ENTRY WCYCLE
PT2A = P2/(A2*Z2*2116.224)
P2 = PT2A/PR(GAM2,AM2)
P4 = PT3/(2116.224*PR(GAM4,AM4))
P0ATM = P0/2116.224
P5ATM = P5/2116.224
PT0A = PT0/2116.224
P1 = P1/2116.224
PT3A = PT3/2116.224
PT4A = PT4/2116.224
IF (RJ) GO TO 200
PTPA = PTP/2116.224
PEA = PTPA/PR(GAMT,AME)
200 WRITE (6,250) AM0, AM1, AM2, AM3, AM4, AM5, IME, GAM2, GAM4,
1 GAMT, AC, A1, A2, A3, A5, AF, P0ATM, P1, P2, P3ATM, P4, P5ATM,
2 PEA, PT0A, PT2A, PT3A, PT4A, PTPA, TT0, TT2, TT4, FA1, F2, F5,
3 FE, AWT, WTM4
250 FORMAT(BH0STATION, 9X, I10, 15X, I11, 15X, I12, 15X, I13, 15X,
1 I14, 15X, I15, 15X, I1E/ 5H MACH, F15.4, 6F16.4/ 4H GAM, 32X,
2 F16.4, 16X, F16.4, 16X, F16.4/ 5H AREA, 2X, 4E16.4, 16X,
3 2E16.4/ 5H PRES, 2X, 7E16.4/ 5H TOTP, 2X, F16.4, 15X, 3E16.4,
4 16X, F16.4/ 5H TOTT, 2X, E16.3, 16X, E16.4, 16X, E16.4,
5 / 7H STREAM, 16X, 2F16.4, 32X, F16.4, F16.4/ 7H MOL WT,
6 38X, F7.3, 28X, F7.3)
WRITE (6,252) CYCLE, P0, P5, WA, WF
252 FORMAT (7H CYCLE=, E13.6, 5X, 3HP0=, E13.6, 5X, 3HP5=, E13.6, 5X,
1 3HWA=, E11.4, 5X, 3HWF=, E11.4)
30 RETURN
END

```

ION AINLET

CDC 6600 FTN V3.0-251A OPT=1 07/15/72

```

FUNCTION AINLET(A)
LOGICAL DUMPLOS, ETAF2, ETAFE, ACLOG
COMMON/DUM/ A2,A3,AWT,AM2,F2,GAM2,PT3,TT2,WA,WF,A2P,CPR,ND
COMMON /BUMA/ AM3, CDB, Y4P
COMMON /AINLT/ A1, AC, AE, ASTAR, AM0, AM1, AM3CK, DUMPLOS,
1 ETAMIX, ETAF2, ETAFE, FAR, GAMT, INKT, PO, PTO, IO, TTF
ACLOG = .FALSE.
GO TO 1
ENTRY BINLET
ACLOG = .TRUE.
1 AC=A
INKT = INKT + 1
X1 = AC*X(1.4,AM0)/A1
AM1 = XM(X1,1.4)
P1 = PTO/PR(1.4,AM1)
WA = PO*AC*AM0*SQRT((1.4*32.2*28.966)/(1545.264*TO))
FA1 = PTO*A1*Z(1.4,AM1)
WF = WA*FAR
XSTAR = X(GAMT, 1.0)
PTP = (WF*SQRT((TTF*1545.264)/(32.2*44.0)))/(ASTAR*XSTAR)
PTH = PTP/PR(GAMT, 1.0)
IF (PTH.LT.P1) GO TO 3
XE = XSTAR*ASTAR/AE
AME = SMX(XE,GAMT)
FE = PTP*AE*Z(GAMT, AME)
GO TO 4
3 AME=WF/(P1*AE*SQRT(GAMT*32.2*44./(1545.264*TTF)))
FF = P1*AE*(1.0+GAMT*(AME**2))
4 F2 = FA1 + FE
IF (ETAF2) F2 = ETAMIX*F2
IF (ETAFE) F2 = FA1 + ETAMIX*FE
Y2 = ((WA+WF)*SQRT(TT2*1545.264/(32.2*AWT)))/F2
IF (.NOT. ACLOG) GO TO 10
YCK = Y(GAM2, .0)
AINLET = (1.0 - Y2/YCK)
IF ((AINLET .GE. 0.0) .AND. (INKT .EQ. 1)) AINLET=0.0
AINLET = AINLET*1.0E3
GO TO 500
10 AM2 = YM(Y2,GAM2)
Z2 = Z(GAM2, AM2)
X2 = X(GAM2, AM2)
IF (DUMPLOS) GO TO 5
X3 = X2*A2/A3
PT3 = ((WA+WF)*SQRT(TT2*1545.264/(32.2*AWT)))/(A3*X3)
GO TO 6
5 CALL DUMP (Z2, X3)
6 AM3CK = XM(X3, GAM2)
AINLET = (AM3 - AM3CK)/AM3
IF ((AINLET .GE. 0.0) .AND. (INKT .EQ. 1)) AINLET=0.0
AINLET = AINLET*1.0E2
500 RETURN
END

```

RTIME DUMP

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

SUBROUTINE DUMP (Z2, X3)

C COMPUTES DIFFUSER AND DUMP LOSSES

COMMON/DUM/ A2, A3, AWT, AM2, F2, GAM2, PT3, TT2, WA, WF, A2P, CPR, DND

PT2 = F2/(A2\*Z2)

P2 = PT2/PR(GAM2, AM2)

P3 = (0.5\*CPR\*GAM2\*(AM2\*\*2) + 1.0)\*P2

AONE = (GAM2-1.0)/2.0

CONE = -(((WA+WF)\*\*2)\*1545.264\*TT2)/((P3\*\*2)\*(A2P\*\*2)\*(GAM2\*32.2

1 \*AWT))

Q = SQRT(1.0-4. \*E\*CONE)

AM3P = (-1.0+Q)/(2. \*AONE)

IF((AM3P.LE.0.) .OR. (AM3P.GE.1.)) AM3P = (-1.0-Q)/(2.0\*AONE)

AM3P = SQRT(AM3P)

PT3 = P3\*PR(GAM2, AM3P)

PT3 = PT3\*EXP(-0.5\*DND\*GAM2\*AM3P\*\*2)

X3 = (WA+WF)\*SQRT(1545.264\*TT2/(32.2\*AWT))/(PT3\*A3)

RETURN

END

CON BUMAC

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```
FUNCTION BUMAC(A)  
COMMON /BUMA/ AM3, CDB, Y4P  
COMMON/DUM/ A2, A3, ANT, AM2, F2, GAM2, PT3, T12, WA, WF, A2P, CPR, ND  
AM3 = A  
SO = A**2  
BUMAC = Y4P*(1.0+GAM2*SQ*(1.0-CDB/2.0))/(SQRT(1.0+(GAM2-1.0)/2.0  
1 *SQ)) - A  
BUMAC = BUMAC*1.0E2  
RETURN  
END
```

UTINE PROPAN

```
SUBROUTINE PROPAN (T, CP, HF)
A = -0.966
B = 7.279E-2
C = -3.755E-5
D = 7.58E-9
CP = 4 + 9*T + C*(T**2) + D*(T**3)
TC = 300.0
HCON = A*TC + 0.5*B*(TC**2) + C*(TC**3)/3.0 + 0.25*D*(TC**4)
HF = A*T + 0.5*B*(T**2) + C*(T**3)/3.0 + 0.25*D*(T**4) - HCON
RETURN
END
```

```
SUBROUTINE AIRTHR (T, CP, HA)
  A = 6.386
  B = 1.762E-3
  C = -2.656E-7
  CP = A + B*T + C*(T**2)
  TC = 300.0
  HCON = A*TC + 0.5*B*(TC**2) + C*(TC**3)/3.0
  HA = A*T + 0.5*B*(T**2) + C*(T**3)/3.0 - HCON
  RETURN
END
```



JTINE ATMOS

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```

SUBROUTINE ATMOS(Z, TM, SIGMA, RHO, THETA, DELTA, CA, AMU, K)
-----
C CALLING SEQUENCE
-----
C CALL ATMOS(Z, TM, SIGMA, RHO, THETA, DELTA, CA, AMU, K)
-----
C Z = GEOMETRIC ALTITUDE (FT)
C TM = MOLECULAR SCALE TEMPERATURE (DEGREES RANKIN)
-----
C RHO = DENSITY LB-SEC**2-FT**(-4) OR SLUGS-FT**3
C THETA = RATIO OF TEMPERATURE TO THAT AT SEA LEVEL
C DELTA = RATIO OF PRESSURE TO THAT AT SEA LEVEL
C CA = SPEED OF SOUND (FT/SEC)
C AMU = VISCOSITY COEFFICIENT (LB-SEC-FT**2)
-----
C K = 1 NORMAL,
C     = 2 ALTITUDE GREATER THAN 30000. FT.,
C     = 3 ALTITUDE NEGATIVE,
-----
DIMENSION HPRIMB(11), TMB(11), SIGMA9(11), ALM(11), ARAY(11,4)
EQUIVALENCE (ARAY(1,1), HPRIMB(1)), (ARAY(1,2), TMB(1)),
*           (ARAY(1,3), SIGMA9(1)), (ARAY(1,4), ALM(1))
-----
DATA ((ARAY(I,J), J=1,4), I=1,11) /
X      0. , 518.688 , 1.000000E 00 , -0.00356616 ,
X      36089.239 , 389.988 , 2.9706958E-01 , 0. ,
X      12020.997 , 389.988 , 3.2665751E-02 , 0.00154592 ,
X      154199.480 , 508.788 , 1.2117870E-03 , 0. ,
X      173884.510 , 508.788 , 5.8677311E-04 , -0.00246888 ,
X      259186.350 , 298.188 , 1.7329156E-05 , 0. ,
X      295275.590 , 298.188 , 1.7928595E-06 , 0.00219456 ,
Y      344488.190 , 406.198 , 9.3921519E-08 , 0.01097280 ,
X      524974.380 , 2386.188 , 7.7658593E-10 , 0.00548640 ,
X      557742.780 , 2566.188 , 5.6324877E-10 , 0.00274320 ,
X      656167.80 , 2836.188 , 2.5726771E-10 , 0.0012024 /
DATA Q / 0.01874176 / , RE / 2.9855531E 07 / ,
X S / 198.72 / , PZ / 2116.2 / ,
X AMU7 / 3.7372998E-07 / , RHOZ / 0.0023769 / ,
X TMZ / 518.688 /
-----
K=1
IF(Z) 26, 18, 17
26 K=3
GO TO 13
17 IF(Z.GT.300000.) K=K+1
16 HPRIM=(RE/(RE+Z))*Z
9 DO 10 M=1,11
IF(HPRIM-HPRIMB(M)) 11,12,10
10 CONTINUE
M=12
11 M=M-1
12 IF(ALM(M)) 14,15,14
14 TM=TMB(M)+ALM(M)*(HPRIM-HPRIMB(M))
SIGMA=EXP((1.0+(Q/ALM(M)))*(ALOG(TMB(M)/TM)))*SIGMA9(M)
GO TO 20
-----

```

UTIME ATMOS

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```
15 TM=TMB(M)
   SIGMA=SIGMAB(M)*EXP(-(Q*(HPRIM-HPRIMB(M))^2/TMB(M))
20 RHO=RHOZ*SIGMA
   THETA=TM/TMZ
   DELTA=SIGMA*THETA
   CA=49.02177*SQRT(TM)
   AMU=AMUZ*SQRT(THETA**3)*((TMZ+S)/(TM+S))
13 RETURN
   END
```

ATMOS064  
ATMOS065  
ATMOS066

```

ION   ATKN
-----
      FUNCTION ATKN(X,Y,N,K,XI)
C
C     ATKN   AITKEN INTERPOLATING FUNCTION
C
C     USAGE...
C
C     Z=ATKN(X,Y,N,K,XI)
C
C     WHERE...
C
C     X - TABLE OF INDEPENDENT VARIABLE VALUES,
C         (MAY BE ASCENDING OR DESCENDING).
C     Y - TABLE OF DEPENDENT VARIABLE VALUES.
C     N - NO. OF POINTS IN TABLES X AND Y.
C     K - DEGREE OF INTERPOLATION DESIRED.
C     XI- X-VALUE FOR WHICH INTERPOLATION IS DESIRED.
C
C     THE INTERPOLATED VALUE IS RETURNED AS THE FUNCTION VALUE.
C
C     31 CELLS OF BLANK COMMON ARE USED.
C
C     DIMENSION X(N), Y(N)
C     COMMON   I1, K1, LI, LL, LU
C     COMMON   XX(13), YY(13)
C     DATA   KMAX/ 12/
C
C     IF ( K .GT. KMAX .OR. K .LE. 0 )   GO TO 300
C
C     K1=K+1
C     IF (X(N)-X(1)) 100,10,10
10  IF (XI-X(1)) 20,20,30
20  LL=0
    GO TO 200
30  IF (X(N)-XI) 40,40,50
40  LL=N-K1
    GO TO 200
50  LL=1
    LU=N
60  IF (LU-LL-1) 180,180,70
70  LI=(LL+LU)/2
    IF (X(LI)-XI) 80,80,90
80  LL=LI
    GO TO 60
90  LU=LI
    GO TO 60
100 IF (XI-X(1)) 120,20,20
120 IF (X(N)-XI) 130,40,40
130 LL=1
    LU=N
140 IF (LU-LL-1) 180,180,150
150 LI=(LL+LU)/2
    IF (Y(LI)-YI) 160,170,170
160 LU=LI
    GO TO 140
170 LL=LI

```

```

ATKN0001
ATKN0002
ATKN0003
ATKN0004
ATKN0005
ATKN0006
ATKN0007
ATKN0008
ATKN0009
ATKN0010
ATKN0011
ATKN0012
ATKN0013
ATKN0014
ATKN0015
ATKN0016
ATKN0017
ATKN0018
ATKN0019
ATKN0000
ATKN0001
ATKN0002
ATKN0003
ATKN0004
ATKN0005
ATKN0006
ATKN0007
ATKN0008
ATKN0009
ATKN0010
ATKN0011
ATKN0012
ATKN0013
ATKN0014
ATKN0015
ATKN0016
ATKN0017
ATKN0018
ATKN0019
ATKN0020
ATKN0021
ATKN0022
ATKN0023
ATKN0024
ATKN0025
ATKN0026
ATKN0027
ATKN0028
ATKN0029
ATKN0030
ATKN0031
ATKN0032
ATKN0033
ATKN0034
ATKN0035
ATKN0036
ATKN0037
ATKN0038
ATKN0039
ATKN0040
ATKN0041
ATKN0042
ATKN0043
ATKN0044
ATKN0045
ATKN0046
ATKN0047
ATKN0048
ATKN0049
ATKN0050
ATKN0051
ATKN0052
ATKN0053
ATKN0054
ATKN0055

```

ION ATKN

CDC 6600 FT: V3.0-252A OPT=1 07/15/71

GO TO 140	ATKN0056
180 LL=LL-(K1+1)/2	ATKN0057
IF (LL) 20, 200, 190	ATKN0058
190 IF (LL+K1-N) 200, 200, 40	ATKN0059
200 GO 210 I=1, K1	ATKN0060
I1=LL+I	ATKN0061
XX(I)=X(I1)-X1	ATKN0062
210 YY(I)=Y(I1)	ATKN0063
GO 220 I=1, K	ATKN0064
GO 220 J=1, N	ATKN0065
220 YY(J+1)=(1./(XX(J+1)-XX(I)))*(YY(I)*XX(J+1)-YY(J+1)*XX(I))	ATKN0066
ATKN=YY(K1)	ATKN0067
RETURN	ATKN0068
C	ATKN0069
700 PRINT 1000, K	ATKN0070
1000 FORMAT ('HOK=', I12, 'H IS INCORRECT FOR FUNCTION ATKN)	ATKN0071
CALL SYSTEM(200.0)	ATKN0072
END	ATKN0073

JTINE SOLNEW

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```

SUBROUTINE SOLNEW(FX, ALOW, HI, TRAP, Y) SOL 1
C SOLVES THE FUNCTION FX FOR THE VALUE OF THE INDEPENDENT VARIABLE X SOL 2
C WHICH MAKES THE VALUE OF FX EQUAL TO ZERO. THE VALUE OF X MUST LIE SOL 3
C IN THE INTERVAL BOUNDED BY ALOW AND HI. IF ANY FATAL DIFFICULTY IS SOL 4
C ENCOUNTERED IN THE SOLUTION THE LOGICAL VARIABLE TRAP IS SET EQUAL SOL 5
C TO TRUE. SOL 6
EXTERNAL FX SOL 7
LOGICAL TRAP, FIRST
DIMENSION F(4), X(4) SOL 9
TRAP = .FALSE. SOL 10
FIRST = .TRUE.
TOL = 1.0E-4
H = HI SOL 12
SMAL = ALOW SOL 13
IF (LOW .LT. HI) GO TO 17 SOL 14
H = ALOW SOL 15
SMAL = HI SOL 16
17 X(1) = ALOW SOL 17
F(1) = FX(X(1)) SOL 18
Y = X(1) SOL 19
IF (ABS(F(1)) .LT. TOL) GO TO 83 SOL 20
X(3) = HI SOL 21
F(3) = FX(X(3)) SOL 22
Y = X(3) SOL 23
IF (ABS(F(3)) .LT. TOL) GO TO 83 SOL 24
Z = SIGN(F(1), F(3)) SOL 25
IF ((F(1)+Z) .EQ. 0.0) GO TO 32 SOL 26
WRITE (6,28) SOL 27
28 FORMAT (60H THE FUNCTIONS FOR THE END POINTS DO NOT HAVE OPPOSITE
1SIGNS)
TRAP = .TRUE. SOL 30
GO TO 83 SOL 31
32 X(2) = X(1) - F(1)*(X(3) - X(1))/(F(3) - F(1)) SOL 32
F(2) = FX(X(2)) SOL 33
Y = X(2) SOL 34
IF (ABS(F(2)) .LT. TOL) GO TO 83 SOL 35
DO 59 JK=1,9 SOL 36
X1SQ = X(1)**2 SOL 37
X1X2 = X(1) - X(2) SOL 38
X1X3 = X(1) - X(3) SOL 39
X2X1SQ = X(2)**2 - X(1)**2 SOL 40
A = X1X3*(F(2)-F(1)) - X1X2*(F(3)-F(1)) SOL 41
B = A/(X1X3*X2X1SQ - X1X2*(X(3)**2 - X1SQ)) SOL 42
C = (A*X2X1SQ - F(2) + F(1))/X1X2 SOL 43
D = F(3) - A*(X(3)**2) - C*X(3) SOL 44
Q = SQRT(9**2 - 4.0*A*C) SOL 45
X(4) = (-9+Q)/(2.0*A) SOL 46
IF ((X(4) .GT. H) .OR. (X(4) .LT. SMAL)) X(4) = (-9-Q)/(2.0*A) SOL 47
Y = X(4) SOL 48
IF (JK .EQ. 9) GO TO 70 SOL 49
F(4) = FX(X(4)) SOL 50
IF (ABS(F(4)) .LT. TOL) GO TO 83 SOL 51
70 62 I=1,3 SOL 52
I1 = I+1 SOL 53
DO 62 J=I1,4 SOL 54

```

UTIME SOLNEW

DOC 6600 FTN V3.0-251A OPT=1 07/15/71

	IF (F(I) .LE. F(J)) GO TO 57	SOL 55
	FS = F(I)	SOL 56
	XS = X(I)	SOL 57
	F(I) = F(J)	SOL 58
	X(I) = X(J)	SOL 59
	F(J) = FS	SOL 60
	X(J) = XS	SOL 61
62	CONTINUE	SOL 62
	IF (.NOT. FIRST) GO TO 63	
	IF ((F(1) + F(2)) .LE. F(1)) GO TO 100	
	XN = (2.0*X(2) + X(1))/3.0	
	FN = FX(XN)	
	IF ((F(1) + FN) .LE. F(1)) GO TO 110	
	F(2) = FN	
	X(2) = XN	
	GO TO 63	
100	IF ((F(3) + F(4)) .GE. F(4)) GO TO 67	
	XN = (X(4) + 2.0*X(3))/3.0	
	FN = FX(XN)	
	IF ((F(4) + FN) .GE. F(4)) GO TO 115	
	F(3) = FN	
	X(3) = XN	
	GO TO 67	
110	F(1) = FN	
	X(1) = XN	
	GO TO 63	
115	F(4) = FN	
	X(4) = XN	
63	FIRST = .FALSE.	
	IF (ABS(F(1)) .GT. ABS(F(4))) GO TO 68	SOL 63
	IF ((F(3)+F(4)) .GE. F(4)) GO TO 69	SOL 64
65	F(1) = F(4)	SOL 65
	X(1) = X(4)	SOL 66
	GO TO 69	SOL 67
68	IF ((F(1)+F(2)) .LE. F(1)) GO TO 65	SOL 68
69	CONTINUE	SOL 69
70	DO 82 I=1,5	SOL 70
	FY = FX(Y)	SOL 71
	IF (ABS(FY) .LT. TOL) GO TO 87	SOL 72
	XLIT = Y + 0.01*TOL*Y	SOL 73
	FLIT = FX(XLIT)	SOL 74
	X0 = Y - XLIT	SOL 75
	F0 = FY - FLIT	SOL 76
	DIP = F0/X0	SOL 77
	IF (DIP .NE. 0.0) GO TO 81	SOL 78
	T0AP = .TRUE.	SOL 79
	GO TO 87	SOL 80
81	Y = Y - FY/DIP	SOL 81
82	CONTINUE	SOL 82
	WRITE (6,85)	
85	FORMAT (24H SOLNEW DID NOT CONVERGE)	
	T0AP = .TRUE.	
87	RETURN	SOL 83
	END	SOL 84



AFAPL-TR-72-7

CON X

CDC 6600 FTN V7.0-251A OPT=1 07/15/71

```
FUNCTION X(G, A) X 1
C DETERMINES X AS A FUNCTION OF MACH NUMBER. G=GAMMA, A=MACH NO. X 2
G1 = G - 1.0 X 3
X = A*SQRT(G/((1.0+0.5*G1*(A**2))**((G+1.0)/G1))) X 4
RETURN X 5
END X 6
```

CON Y CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```
FUNCTION Y(G, A)
C DETERMINES Y AS A FUNCTION OF MACH NUMBER. G=GAMMA, A=MACH NO.
SO = A**2
Y = (A/(1.0+G*SQ)) * SQRT(G*(1.0+0.5*(G-1.0)*SQ))
RETURN
END
```

Y	1
Y	2
Y	3
Y	4
Y	5
Y	6



AFAPL-TR-72-7

ON Z

CDC 6600 FTN V3.J-231A OPT=1 07/15/77

```
FUNCTION Z(G, A)                                Z 1
C. DETERMINES Z AS A FUNCTION OF MACH NUMBER. G=GAMMA, A=MACH NO.  Z 2
SQ = A**2                                        Z 3
G1 = G - 1.0                                     Z 4
Z = (1.0+G*SQ)/((1.0+0.5*G1*SQ)**(G/G1))        Z 5
RETURN                                           Z 6
END                                              Z 7
```

JTINF FUEL DAT

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```
-----  
SUBROUTINE FUEL DAT (TO, FAR, DT, WTM4, GAM4)  
DIMENSION TEMS(12), FARS(18), Z1(18,12), Z2(18,12), Z3(18,12)  
-----  
2  READ (5,2) NFAR, NT  
   FORMAT (2I10)  
   READ (5,5) (FARS(I), I=1,NFAR)  
   READ (5,5) (TEMS(I), I=1,NT)  
5  FORMAT (10X, 6E10.0)  
   DO 10 K=1,NT  
10  READ (5,5) (Z1(I,K), I=1,NFAR)  
   DO 20 K=1,NT  
20  READ (5,5) (Z2(I,K), I=1,NFAR)  
   DO 30 K=1,NT  
30  READ (5,5) (Z3(I,K), I=1,NFAR)  
   RETURN  
-----  
ENTRY FUELINT  
DT = BUYIN(FAR, TO, FARS, NFAR, TEMS, NT, Z1)  
WTM4 = BUYIN(FAR, TO, FARS, NFAR, TEMS, NT, Z2)  
GAM4 = BUYIN(FAR, TO, FARS, NFAR, TEMS, NT, Z3)  
RETURN  
-----  
END  
-----
```

CON QUYIN

CDC 6500 FTN V3.3-251A OPT=1 07/15/73

```
FUNCTION QUYIN (XI, YI, X, NX, Y, NY, Z)
DIMENSION X(18), Y(12), Z(18,12), V(18), U(12)
DO 6 I=1, NY
DO 5 J=1, NX
5 V(J) = Z(J,I)
6 U(I) = ATKN (X, V, NX, 1, XI)
QUYTN = ATKN (Y, U, NY, 1, YI)
RETURN
END
```

ION XM

CDC 6600 FTM V3.0-251A GPT=1 07/15/71

	FUNCTION XM(X,G)		XM	1
	C DETERMINES SUBSONIC MACH NUMBER AS A FUNCTION OF X. G=GAMMA		XM	2
	TOL = X*1.0E-8			
	G1 = G-1.0		XM	4
	XM = 0.0		XM	5
	F1 = -X		XM	6
	IF (ABS(F1) .LE. TOL) GO TO 26		XM	7
	XM = 1.0		XM	8
	F3 = SQRT(G/((1.0+0.5*G1)**((G+1.0)/G1))) - X		XM	9
	IF (ABS(F3) .LT. TOL) GO TO 26		XM	10
	SI = SIGN(F1, F3)			
	IF ((F1 + SI) .EQ. 0.0) GO TO 13			
	PRINT 100, F3			
100	FORMAT (30H SAME SIGN FOR X FUNCTION - F=, E13.5)			
	XM = 1.0			
	GO TO 26			
13	XM = -F1/(F3 - F1)		XM	11
	F2 = XM*SQRT(G/((1.0+0.5*G1*(XM**2))**((G+1.0)/G1))) - X		XM	12
	A = ((F3-F1)*XM - F2 + F1)/XM*(1.0-XM)			
	B = F3 - F1 - A		XM	14
	C = F1		XM	15
	RT = SQRT(B**2 - 4.0*A*C)		XM	16
	XM = (-B+RT)/(2.0*A)		XM	17
	IF ((XM.GT.1.0) .OR. (XM.LT.0.0)) XM = (-B-RT)/(2.0*A)		XM	18
	DO 25 I=1,9			
	SQ = XM**2		XM	20
	F = XM*SQRT(G/((1.0+0.5*G1*SQ)**((G+1.0)/G1))) - X		XM	21
	IF (ABS(F) .LT. TOL) GO TO 26		XM	22
	FP = 2.0*(1.0-SQ)*(SQRT(G/((1.0+0.5*G1*SQ)**((G+1.0)/G1))))		XM	23
	1/(2.0 + G1*SQ)		XM	24
25	XM = XM - F/FP		XM	25
	PRINT 50			
50	FORMAT (23H X FUN DID NOT CONVERGE)			
26	RETURN		XM	26
	END		XM	27

Reproduced from  
best available copy.

ION	YM			
			CDC 6600 FTN V3.0-251A OPT=1	07/15/71
		FUNCTION YM(Y,G)		YM 1
C		DETERMINES SUBSONIC MACH NO. AS A FUNCTION OF Y. G=GAMMA		YM 2
		TOL = Y*1.0E-8		
		G1 = G - 1.0		YM 4
		YM = 0.0		YM 5
		F1 = -Y		YM 6
		IF (ABS(F1) .LE. TOL) GO TO 27		YM 7
		YM = 1.0		YM 8
		F3 = (SQRT(G*(1.0+0.5*G1)))/(1.0+G) - Y		YM 9
		IF (ABS(F3) .LT. TOL) GO TO 27		YM 10
		YM = -F1/(F3 - F1)		YM 11
		SQ = YM**2		YM 12
		F2 = (YM/(1.0+G*SQ))*SQRT(G*(1.0+0.5*G1*SQ)) - Y		YM 13
		A = ((F3-F1)*YM - F2 + F1)/(YM*(1.0-YM))		
		B = F3 - F1 - A		YM 15
		C = F1		YM 16
		RT = SQRT(B**2 - (4.*A*C))		YM 17
		YM = (-B+RT)/(2.0*A)		YM 18
		IF (YM.LT.0.0) .OR. (YM.GT.1.0) Y = (-B-RT)/(2.0*A)		YM 19
		I=1,9		
		YM**2		YM 21
		F = (YM/(1.0+G*SQ))*SQRT(G*(1.0+0.5*G1*SQ)) - Y		YM 22
		IF (ABS(F) .LT. TOL) GO TO 27		YM 23
		FP = ((1.0-SQ)/(1.0+0.5*G1*SQ))*(SQRT(G*(1.0+0.5*G1*SQ)))/		YM 24
		1 ((1.0+G*SQ)**2)		YM 25
26		YM = YM - F/FP		YM 26
		PRINT F		
50		FORMAT (23H Y FUN DID NOT CONVERGE)		
27		RETURN		YM 27
		END		YM 28

TOM ZM

COC 6500 FTN V3.0-251A OPT=1 07/15/71

	FUNCTION ZM(Z,G)	ZM	
C	DETERMINES SUBSONIC MACH NUMBER AS A FUNCTION OF Z. G=GAMMA	ZM	1
	TOL = Z*1.0E-9	ZM	2
	G1 = G - 1.0	ZM	4
	ZM = 0.0	ZM	5
	F1 = 1.0 - Z	ZM	6
	IF (ABS(F1) .LT. TOL) GO TO 26	ZM	7
	ZM = 1.0	ZM	8
	F3 = (1.0+G)/((1.0+0.5*G1)**(G/G1)) - Z	ZM	9
	IF (ABS(F3) .LT. TOL) GO TO 25	ZM	10
	ZM = F1/(F3 - F1)	ZM	11
	S0 = ZM**2	ZM	12
	F2 = (1.0 + G*SQ)/((1.0+0.5*G1*SQ)**(G/G1)) - Z	ZM	13
	A = ((F3-F1)*ZM - F2 + F1)/(ZM-SQ)	ZM	14
	B = F3 - F1 - A	ZM	15
	C = F1	ZM	16
	RT = 3OPT(P**2 - 4.0*A*C)	ZM	17
	ZM = (-R + RT)/(2.0*A)	ZM	18
	IF ((ZM.GT.1.0).OR.(ZM.LT.0.0)) ZM=(-R-RT)/(2.0*A)	ZM	19
	DO 25 I=1,10	ZM	20
	S0 = ZM**2	ZM	21
	F = (1.0+G*SQ)/((1.0+0.5*G1*SQ)**(G/G1)) - Z	ZM	22
	IF (ABS(F) .LT. TOL) GO TO 25	ZM	23
	FP=G*ZM*(2.-(1.+G*SQ)/(1.+0.5*G1*SQ))/((1.+0.5*G1*SQ)**(G/G1))	ZM	24
25	ZM = ZM - F/FP	ZM	25
	POINT 00		
50	FORMAT (23H Z FUN DID NOT CONVERGE)		
26	RETURN	ZM	26
	END	ZM	27

```

ION      SMX      CDC 6600 FTN V3.0-251A OPT=1 07/15/71
      FUNCTION SMX(X,G)
      C DETERMINES SUPERSONIC MACH NO. AS A FUNCTION OF X. G=GAMMA, MAX MACH=4
      DIMENSION FA(3), XA(3)
      TOL = Y*1.0E-5
      G1 = G - 1.0
      XA(1) = 1.0
      XA(2) = 4.0
      DO 13 I=1,3
      FA(I)=XA(I)*SQRT(G/((1+.5*G1*(XA(I)**2))*((G+1.)/G1)))-X
      SMX = YA(I)
      IF(ABS(FA(I)) .LT. TOL) GO TO 32
      IF(I.EQ.2) XA(3)=XA(1)-FA(1)*(XA(2)-XA(1))/(FA(2)-FA(1))
13      CONTINUE
      X1S2 = XA(1)**2
      X1X2 = XA(1) - XA(2)
      X1X3 = XA(1) - XA(3)
      X2X1S2 = XA(2)**2 - XA(1)**2
      A = X1X3*(FA(2) - FA(1)) - X1X2*(FA(3)-FA(1))
      B = A/(X1X3*X2X1S2 - X1X2*(XA(3)**2 - X1S2))
      C = (A*X2X1S2 - FA(2) + FA(1))/X1X2
      D = FA(3) - A*(XA(3)**2) - B*XA(3)
      Q = SQRT(D**2 - 4.0*A*C)
      SMX = (-B+Q)/(2.0*A)
      IF((SMX.LT.1.0) .OR. (SMX.GT.4.0)) SMX=(-B-Q)/(2.0*A)
      DO 21 I=1,5
      SQ = SMX**2
      F = SMX*SQRT(G/((1.0+0.5*G1*SQ)**((G+1.0)/G1))) - X
      IF(ABS(F) .LT. TOL) GO TO 32
      FP = 2.0*(1.0-SQ)*(SQRT(G/((1.0+0.5*G1*SQ)**((G+1.0)/G1))))/(2.0+
1  G1*SQ)
31      SMX = SMX - F/FP
32      RETURN
      END
SMX      1
SMX      2
SMX      3
SMX      4
SMX      5
SMX      6
SMX      7
SMX      8
SMX      9
SMX     10
SMX     11
SMX     12
SMX     13
SMX     14
SMX     15
SMX     16
SMX     17
SMX     18
SMX     19
SMX     20
SMX     21
SMX     22
SMX     23
SMX     25
SMX     26
SMX     28
SMX     29
SMX     30
SMX     31
SMX     32
SMX     33

```

Reproduced from  
best available copy.

AFAPL-TR-72-7

ION PR

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```
FUNCTION PR(G,A)
C DETERMINES THE RATIO OF TOTAL PRESSURE TO STATIC PRESSURE AS A
C FUNCTION OF MACH NO. AND GAMMA. G=GAMMA, A=MACH NO.
G1 = G-1
PR = (1.0 + 0.5*G1*(A**2))**(G/G1)
RETURN
END
```



AFAPL-TR-72-7

ION TR

CDC 6600 FTN V3.0-251A OPT=1 07/15/71

```
FUNCTION TP(G,A)
C DETERMINES THE RATIO OF TOTAL PRESSURE TO STATIC PRESSURE AS A
C FUNCTION OF MACH NO. AND GAMMA. G=GAMMA, A=MACH NO.
  TR = 1.0 + 0.5*(G-1.0)*(A**2)
RETURN
END
```

AFAPL-TR-72-7

CORE MAP 08.56.31. NORMAL CONTROL  
 ---TIME---LOAD MODE ---L1---L2---TYPE-----USER---++---CALL-----  
 FWA LOADER 040764 FWA TABLES 035722  
 -PROGRAM---ADDRESS-  
 MONCRJ 000152

CYCLE 003511

AINLET 004365

DUMP 004673  
 BUMAC 005005

PROPAN 005036

AIRTHR 005124

ATHOS 005171

ATKN 005363

SOLNEW 005616

X 006265

Y 006310

Z 006334

FUELDAT 006350

BUYIN 010010

XM 010147

YM 010371

ZM 010570

SMX 010766

TR 011213

PR 011231

GETPA 011753

SIO\* 011272

SYSTEMS 012646

IFENDFS 013631

INPUTCS 013710

INPUTNS 014026

KODERS 015205

KRAKERS 016601

OUTPTCS 020325

ALNLOGE 020421

EXPE 020460

SQRTE 020524

XTOYE 020546

--LAFLEED--COMMON--

CYCL 000100

BUMA 000110

AINLT 000113

DUM 000135

CYCL 000100

BUMA 000110

AINLT 000113

DUM 000135

BUMA 000110

AINLT 000113

DUM 000135

BUMA 000110

DUM 000135

-----UNSATISFIED EXTERNALS-----

REFERENCES

REFERENCES

1. B. H. Neuffer and D. J. Morrow, Full-Size Maneuvering Target Feasibility Study, AFATL-TR-70-77, August 1970.
2. K. A. Watson, 1st Lt, USAF, X, Y, and Z Mach Number Functions for One-Dimensional Compressible Flow, APRA-TM-70-16, May 1970.
3. R. V. Van Dewaestine and R. W. Fox, "An Experimental Investigation on the Effect of Subsonic Inlet Mach Number on the Performance of Conical Diffusers," Int. J. Mech. Sci., 1966, Vol 8, pp 759-769.
4. A. T. McDonald and R. W. Fox, "An Experimental Investigation of Incompressible Flow in Conical Diffusers," Int. J. Mech. Sci., 1966, Vol 8, pp 125-139.
5. L. P. Barclay, Capt, USAF, Memo for Record, "Extension of Pressure Loss Parameter," May 1971.