

AD-775 422

CALCULATION OF TNT AIR-BLAST EQUIVALENCIES FOR SURFACE BURSTS

Thomas Caggiano

Picatinny Arsenal
Dover, New Jersey

December 1973

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE
5285 Port Royal Road, Springfield Va. 22151

UNCLASSIFIED
Security Classification

AD-775422

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION	
U. S. Army, Picatinny Arsenal, Dover, NJ		Unclassified	
		2b. GROUP	
3. REPORT TITLE			
CALCULATION OF TNT AIR-BLAST EQUIVALENCIES FOR SURFACE BURSTS			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
5. AUTHOR(S) (First name, middle initial, last name)			
Thomas Caggiano			
6. REPORT DATE		7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
December 1973		52	11
8a. CONTRACT OR GRANT NO.		9a. ORIGINATOR'S REPORT NUMBER(S)	
AMCMS Code 4932.05.4169.8		Technical Report 4567	
b. PROJECT NO.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c.			
d.			
10. DISTRIBUTION STATEMENT			
Approved for Public Release: Distribution Unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
		Picatinny Arsenal, Dover, NJ U. S. Army Armament Command Rock Island, Illinois	
13. ABSTRACT			
<p>TNT air-blast standards for hemispherical explosive charges (scaled positive unit impulse and peak pressure vs scaled distance) are presented in graphical and tabular forms. Equations for positive unit impulse and peak pressure TNT equivalencies are derived, permitting rapid manual calculation. The equivalencies relate the weight ratio of TNT to the sample material in terms of their relative explosive airblast. The calculation of TNT equivalencies will facilitate and expedite the efficient, reliable establishment of intraline distances in production facilities and loading plants. A FORTRAN Extended computer program with complete documentation and sample input and output is included in this study.</p>			

DD FORM 1473 1 NOV 66

REPLACES DD FORM 1473, 1 JAN 64, WHICH IS OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

22

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
TNT standards Scaled distance Scaled impulse TNT equivalency TNT Equivalency Computer Program Surface hemispherical blasts Barricade design aid Protective explosive structures Blast pressure						

Technical Report 4567


**CALCULATION OF TNT AIR-BLAST
EQUIVALENCIES FOR SURFACE BURSTS**

by

Thomas Caggiano

December 1973

AMCMS Code 4932.05.4169.8



Approved for Public Release: Distribution Unlimited.

**Manufacturing Technology Directorate
Picatinny Arsenal
Dover, New Jersey 07801**

iii

ACKNOWLEDGEMENT

The author wishes to express his sincere appreciation for valuable assistance and comments received from:

Mr. L. W. Saffian
Mr. S. Wachtell
Mr. M. Baer
Mr. C. H. Nichols
Mr. R. Rindner
Mr. M. Myers

The author also wishes to express his appreciation to Mrs. H. Napadinsky and Mr. J. Swatosh (IIT Research Institute) for providing mathematical expressions for the TNT impulse and pressure standards, for technical guidance, and other comments.

TABLE OF CONTENTS

	Page No.
Abstract	1
Conclusion	1
Recommendation	1
Background	2
Study	4
Glossary	5
References	8
Distribution	47
Figure	
1 Schematic of a surface burst	3
Appendix	
A Derivation for TNT Pressure Equivalency	9
B Derivation for TNT Impulse Equivalency	11
C Derivation for TNT Scaled Impulse and Scaled Distance as a Function of Positive Impulse and Radial Distance	13
D TNT Standards for Hemispherical-Shaped Charges	15
E Sample Calculations	38
F FORTRAN Extended Computer Program	40

ABSTRACT

TNT air-blast standards for hemispherical explosive charges (scaled positive unit impulse and peak pressure vs scaled distance) are presented in graphical and tabular forms. Equations for positive unit impulse and peak pressure TNT equivalencies are derived, permitting rapid manual calculation. The equivalencies relate the weight ratio of TNT to the sample material in terms of their relative explosive airblast. The calculation of TNT equivalencies will facilitate and expedite the efficient, reliable establishment of intraline distances in production facilities and loading plants. A FORTRAN Extended computer program with complete documentation and sample input and output is included in this study.

CONCLUSION

TNT airblast standards were established in terms of peak pressure and scaled positive unit impulse vs scaled distance for surface hemispherical explosive charges. A rapid, efficient computational procedure was formulated to determine TNT equivalencies directly, taking into account booster effects.

RECOMMENDATION

Adoption of the TNT airblast standards and computational procedure will permit a uniform comparison of explosive output in terms of TNT equivalencies. Utilizing TNT equivalencies will facilitate and expedite the efficient reliable design of barricades and establishment of the required intraline distances in production facilities and loading plants in accordance with References 1 and 2.

BACKGROUND

TNT airblast standards and the computational procedure for determining TNT equivalencies were devised to assist in barricade design and in determining intraline distances.

In the design of protective structures to resist the effects of accidental explosions, the two prime factors of the explosive output of a material to be considered are blast pressures and primary fragments. Of these two parameters, the blast pressure is usually the governing factor in determining the structure's capability to withstand damage.

The blast effect of an explosion is in the form of a shock wave composed of a high-pressure shock front which expands outward from the center of the detonation, with the intensity of the pressure decaying with distance and as a function of time. As the wave front impinges on a protective structure, a portion or all of the structure will be engulfed by the shock pressure. The magnitude and distribution of the blast loads on the structure, arising from pressure, are a function of three factors:

1. Explosive properties (i.e., the type of explosive material and energy output (high or low order detonation)) and weight of explosives;
2. Location of the explosion relative to the protective structure;
3. Magnitude and reinforcement of the pressure by its interaction with the ground, barrier, or the protective structure itself.

The blast pressure environment produced will vary not only among different materials, but may also differ for a particular material. Different factors in manufacturing, storage and handling may alter the blast effects of an explosive material.

Unlike high explosive materials, other solid, liquid, and gaseous materials will exhibit a variation of their blast pressure output. An explosion of these materials is in many cases incomplete, and only a portion of the total mass of the explosive is involved in the detonation process. The remainder of the mass is usually consumed in deflagration, resulting in a large amount of the material chemical energy being dissipated as thermal energy, which in turn may cause fires.

The major quantity of blast effect data presented in Reference 2 pertains to the blast pressure output of TNT explosions. This data can be extended to include other potentially mass detonating materials whose shapes differ from those considered in the manual by relating the explosive energy of the "effective charge weight" of these materials to that of an equivalent weight of TNT. To obtain the equivalencies of the blast effects of other materials in the anticipated environments, they must be analyzed and then related to the blast effects produced by the TNT explosion at the range of interest. To illustrate a typical analysis:

Explosive tests of certain propellant liquids and hydrocarbon mixtures indicated that their explosive equivalent, which relates both the peak blast pressures and impulse, is constant over the entire intermediate and low pressure ranges. At higher pressures, the TNT equivalent will vary for each pressure level and will be different from the TNT equivalent which relates to the impulse. For blast-resistant design in general, the TNT equivalent should be based on a pressure and/or impulse relationship, depending on the anticipated pressure-design range.

A charge located on or very near the ground is considered to be a surface burst (see Fig 1).

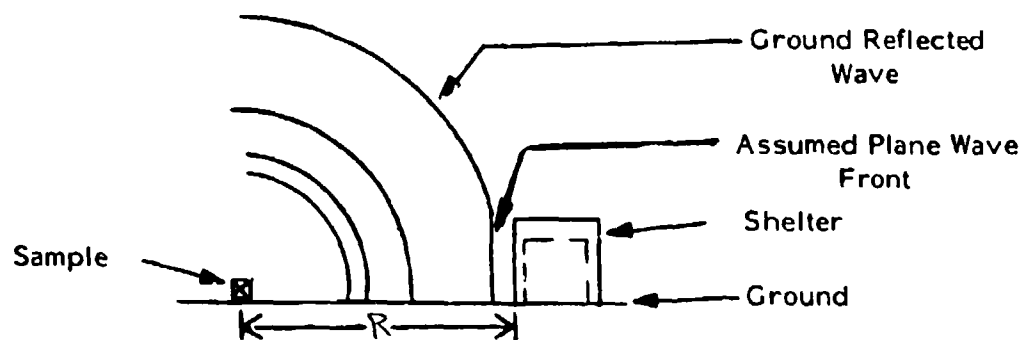


Fig 1 Schematic of a surface burst

The initial wave of the explosion is reflected and reinforced by the ground surface, producing a reflected wave. Unlike the airburst above the surface, however, the reflected wave merges with the incident wave at the point of detonation to form a single wave. This wave is similar in nature to the reflected wave of the airburst, but is essentially hemispherical in shape. It should be noted that at a given distance from the detonation of a given weight of explosive, all the explosive output parameters of a surface burst environment are larger than those for a free-air burst environment.

STUDY

The explosive airblast parameters, peak pressure, and positive impulse for hemispherical-shaped TNT charges were established by References 1 through 3. The mathematical expressions correlating scaled impulse (Y) and pressure (P) to scaled distance (Z) for TNT have been determined to be of the form:

$$\log Z = \sum C_i \{ \log P \}^i$$

$$Z = a Y^{-b}$$

where a, b, and c are constants.

The TNT pressure equivalency (EP) and scaled distance (ZP) are related to the radial distance from the sample (R), weight of the sample (WS), pressure (P), and booster effects (B) as:

$$EP = \left\{ \left[\frac{R}{Z} \right]^3 - B \right\} / WS \quad ZP = Z \times EP^{1/3}$$

$$Z = 10 \left[\sum C_i \times [\log P]^i \right]$$

Similarly, the TNT impulse equivalency (EI) and scaled distance (ZI) are related to the positive unit impulse (IT), TNT scaled impulse (Y) and scaled distance (Z) as:

$$EI = \left\{ \left[\frac{IT}{Y} \right]^3 - B \right\} / WS = \left\{ \left[\frac{R}{Z} \right]^3 - B \right\} / WS$$

$$Y = \text{function} \{ IT, R \} \quad Z = \text{function} \{ IT, R \}$$

Sample calculations for TNT equivalencies and scaled distances are given in Appendix E. A FORTRAN Extended computer program is given in Appendix F.

GLOSSARY

Intraline Distance (as outlined in Ref 2):

This distance is the minimum permitted between any two buildings within one operating line. Intraline distances are also used for separating certain specified areas, buildings, and locations even though actual line operations are not involved. All unpacked ammunition and explosives except Classes 1, 2, and 2A in such a line are considered Class 7. Intraline distance is expected to protect buildings from propagation of explosion due to blast effects, but not against the possibility of propagation due to missiles. Buildings separated by intraline distances will probably still suffer substantial structural damage.

A service type magazine shall be located at intraline distance (based on the quantity of explosives within the magazine) from the nearest operating building of the line of which it forms a part. Service type magazines shall be separated from each other by intraline distances.

Separate facilities (excluding service magazines) servicing a single explosives operating building may be located at less than intraline distances but not less than 100 feet from the operating building. Such facilities, which include low pressure heating boilers and paint storage buildings, must, however, be at least intraline distance from other explosive buildings.

Peak Pressure (P): Maximum Pressure (psig) attained


$$\frac{\partial P}{\partial t} = 0$$

Z, WT

Positive Impulse (I): The unit impulse (psi-millisecond) produced by a pressure is proportional to the change in momentum over the time duration in which the positive pressure acts.

I = shaded area under curve

$$I = \int_{t_a}^{t_a+t_0} P(t) dt$$

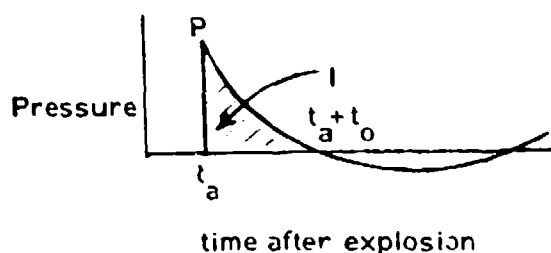

Scaled Distance (Z): Radial distance (ft) divided by the scaling factor which is the cube root of the weight (lb) of the material.

$$Z = R/W^{1/3}$$

Scaled Impulse (Y): Positive unit impulse (psi-millisecond) divided by the scaling factor which is the cube root of the weight (lb) of the material.

$$Y = I/W^{1/3}$$

TNT Impulse Equivalency (EI): The ratio of the weights (weight of TNT/weight of test sample) which will yield the same positive impulse at the same radial distance from the test sample.

TNT Pressure Equivalency (EP): The ratio of weights (weight of TNT/weight of test sample) which will yield the same peak pressure at the same radial distance from the test sample.

REFERENCES

1. Department of the Army, *Structures to Resist the Effects of Accidental Explosions*, TM 5-1300, NAVFAC P-397, AFM 88-22, 15 June 1969
2. Department of the Army, *Safety*, Army Materiel Command Regulation 385-100, April 1970 and Change 1, 14 October 1971
3. C. N. Kingery and B. F. Pannill, *Peak Overpressure vs Scaled Distance for TNT Surface Bursts (Hemispherical Charges)*, Ballistic Research Laboratories Memorandum, Report 1510, April 1964
4. H. S. Napadensky and J. J. Swatosh Jr., *TNT Equivalency of Black Powder*, Report J6265-3, IIT Research Institute, Chicago, Illinois, September 1972
5. H. S. Napadesnky and J. J. Swatosh Jr., *TNT Equivalency of Nitroguanidine, Guanidine Nitrate, and GN Reactor*, Report J6276-1, ITT Research Institute, Chicago, October 1973
6. Richard Rindner et al., *Manual for Design of Protective Structures Used in Explosive Processing and Storage Facilities*, Picatinny Arsenal Technical Report 3808, November 1968
7. Letter from Picatinny Arsenal to U. S. Army Munitions Command, Subject: *TNT Equivalency of Black Powder*, 15 August 1972
8. Letter from U. S. Army Munitions Command to U. S. Army Materiel Command, First Indorsement, Subject: *TNT Equivalency of Black Powder*, 15 August 1972
9. Letter from U. S. Army Materiel Command to Chairman, Department of Defense Explosives Safety Board, Second Indorsement, Subject: *TNT Equivalency of Black Powder*, 14 September 1972
10. Department of Defense Explosives Safety Board to U. S. Army Materiel Command, Third Indorsement, Subject: *TNT Equivalency of Black Powder*, 27 September 1972
11. C. V. Moore, *The Design of Barricades for Hazardous Pressure Systems*, Nuclear Engineering and Design, North-Holland Publishing Co., Amsterdam, Holland, Volume 5, 1967, pp. 81-97

APPENDIX A
DERIVATION FOR TNT PRESSURE EQUIVALENCY

APPENDIX A

TNT PRESSURE EQUIVALENCY DERIVATION
ENGINEER - THOMAS CAGGIANO

DEFINITION:

TNT EQUIVALENCY FOR PRESSURE IS DEFINED AS THE RATIO OF CHARGE WEIGHT (W/WS) THAT WILL GIVE THE SAME PEAK PRESSURE AT THE SAME RADIAL DISTANCE.

NOMENCLATURE:

R BOOSTER CORRECTION FACTOR
EP TNT PRESSURE EQUIVALENCY FOR SAMPLE
ER BOOSTER EQUIVALENCY (IF - C4=1.25)
R RADIAL DISTANCE (FT)
WR WEIGHT OF BOOSTER (LBS)
WS WEIGHT OF SAMPLE (LBS)
WT TOTAL EFFECTIVE WEIGHT OF SAMPLE + BOOSTER (LBS)
W WEIGHT OF TNT (LBS)
ZT SCALED DISTANCE FOR SAMPLE + BOOSTER FT/(LH)^{1/3}
Z SCALED DISTANCE FOR TNT
Z FUNCTION OF PRESSURE (IE - 8TH DEGREE POLYNOMIAL)

$$R = ER * WR$$

$$WT = WS + (R/EP)$$

$$Z = R/W^{1/3}$$

$$EP = W/WT = (ZT/Z)^3$$

$$Z^3 EP = ZT^3 = R / WT$$

$$Z^3 EP = R / (WS + R/EP) = EP * R / (EP * WS + R)$$

$$Z^3 = R / (EP * WS + R)$$

$$EP * WS + R = (R/Z)^3$$

$$EP * WS = (R/Z)^3 - R$$

$$EP = ((R/Z)^3 - R) / WS$$

APPENDIX B
DERIVATION FOR TNT IMPULSE EQUIVALENCY

APPENDIX B

TNT IMPULSE EQUIVALENCY DERIVATION
ENGINEER - THOMAS CAGGIANO

DEFINITION:

TNT EQUIVALENCY FOR IMPULSE IS DEFINED AS THE RATIO OF CHARGE WEIGHT (W/WS) THAT WILL GIVE THE SAME POSITIVE IMPULSE AT THE SAME RADIAL DISTANCE.

NOMENCLATURE:

- H ROOSTER CORRECTION FACTOR
- ER ROOSTER EQUIVALENCY (ER = C4=1.25)
- FI TNT IMPULSE EQUIVALENCY FOR SAMPLE
- IT IMPULSE (PST-MSEC) FOR SAMPLE AND ROOSTER
- I IMPULSE FOR TNT
- R RADIAL DISTANCE (FT)
- WH WEIGHT OF ROOSTER (LBS)
- WS WEIGHT OF SAMPLE (LBS)
- WT TOTAL EFFECTIVE WEIGHT OF SAMPLE + ROOSTER (LBS)
- W WEIGHT OF TNT (LBS)
- Y^{1/3} SCALED IMPULSE (PST-MSEC/(LR)^{1/3}) FOR ROOSTER + SAMPLE
- Y SCALED IMPULSE FOR TNT FOR WT=R, IT=I
- Y FUNCTION OF IT AND R (SEE DERIVATION - APPENDIX C)

$$Y = I/W^{1/3}$$

$$WT = WS + (H/ER)$$

$$R = ER * WH$$

$$FI = W/WT = (YI/Y)^3$$

$$Y^3 EI^3 = Y^3 IT^3 / WT^3$$

$$Y^3 EI^3 = IT^3 / (WS + (R/ER))^3 = FI^3 IT^3 / (WS * FI + R)$$

$$EI^3 * WS + R = (IT/Y)^3$$

$$FI = ((IT/Y)^3 - R) / WS$$

APPENDIX C

**DERIVATION FOR TNT SCALED IMPULSE AND
SCALED DISTANCE AS A FUNCTION OF POSITIVE
IMPULSE AND RADIAL DISTANCE**

APPENDIX C

DERIVATION FOR $Y = \text{FUNCTION}(IT, R)$
 $Z = \text{FUNCTION}(IT, R)$

$$YI = I^{1/3} / (RT)^{1/3}$$

$$ZI = RI / (RT)^{1/3}$$

$$IT = YI^{3/2} (RT)^{1/2}$$

$$RI = ZI^{3/2} (RT)^{1/2}$$

FOR EQUAL IMPULSES:

FOR EQUAL DISTANCES:

$$IT = I$$


$$RI = R$$

$$YI^{3/2} (RT)^{1/2} = Y^{3/2} (R)^{1/2}$$

$$ZI^{3/2} (RT)^{1/2} = Z^{3/2} (R)^{1/2}$$

$$(YI/RT)^{1/3} = (ZI/R)^{1/3} = YI/Y = R/I$$

$\text{LOG}(YI) - \text{LOG}(Y) = \text{LOG}(ZI) - \text{LOG}(Z)$
 THIS REPRESENTS THE EQUATION OF A 45 DEGREE LINE FROM A POINT, P (YI, ZI) TO A POINT, Q (Y, Z) ON LOG-LOG PAPER, THUS SATISFYING THE CONDITIONS OF EQUAL POSITIVE IMPULSES AT EQUAL DISTANCES.

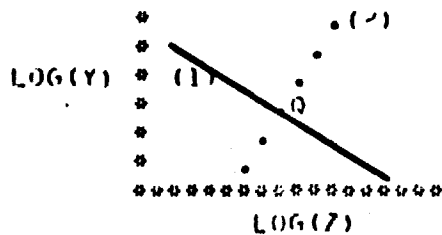

NOTE: $Z = (ZI/YI) * Y$
 $Z = (PI/IT) * Y$
 $Z = C * Y$

CURVE 1: $A * Y^{-D} = Z$

CURVE 2: $C * Y = Z$

A and D are constants

AT POINT Q: $A * Y^{-D} = C * Y$

$$A/C = Y^{1+D} \Rightarrow Y = Y^{1/(1+D)}$$

$$Z = A^{1/(1+D)} \cdot C^{(1-(1/(1+D)))}$$

$$(A/C)^{1/(1+D)} = Y$$

FROM IIRHI DATA: $A=77.441$
 $D=1.02404$

THEREFORE: $Y = (77.761 (IT/RT))^{0.49405}$ $Z = (70.0868 (RT/IT))^{.50595}$

APPENDIX D
TNT STANDARDS FOR HEMISPHERICAL-
SHAPED CHARGES

APPENDIX D
TNT STANDARDS FOR SURFACE HEMISPHERICAL BURSTS
GRAPHICAL CORRELATIONS FOR TNT STANDARDS

SCALED IMPULSE VERSUS SCALED DISTANCE

$$Y_{TNT} = A \cdot Z^{-B}$$

WHERE: $A = 77.641$
 $B = 1.02409$

SCALED DISTANCE VERSUS PEAK OVER-PRESSURE

$$Z_{TNT} = 10 \cdot \left((A1 + P \cdot (A2 + P \cdot (A3 + P \cdot (A4 + P \cdot (A5 + P \cdot (A6 + P \cdot (A7 + P \cdot A8)))))) \right)$$

WHERE:

$$A1 = 1.6556442$$

$$A2 = -.78501246$$

$$A3 = .042385434$$

$$A4 = .1301777$$

$$A5 = -.052100394$$

$$A6 = -.0076767222$$

$$A7 = .0068537028$$

$$A8 = -.00094665924$$

$$P = \text{LOG}(P) \quad \text{UNITS } P = \text{PSIG}$$

TABLE I

PRESSURE OR IMPULSE AS A FUNCTION OF SCALED DISTANCE

SCALED DISTANCE $\frac{1}{3}$ (FT/LB)	PRESSURE (PSIG)	SCALED IMPULSE $\frac{1}{3}$ (PSI-MS/LB)	SCALED DISTANCE $\frac{1}{3}$ (FT/LB)	PRESSURE (PSIG)	SCALED IMPULSE $\frac{1}{3}$ (PSI-MS/LB)
2.000	320.71	35.61	10.800	8.31	6.87
2.200	262.98	32.45	11.000	8.03	6.75
2.400	218.47	29.81	11.200	7.77	6.63
2.600	183.61	27.57	11.400	7.52	6.51
2.800	155.95	25.65	11.600	7.28	6.40
3.000	135.71	23.98	11.800	7.06	6.30
3.200	119.64	22.51	12.000	6.85	6.20
3.400	100.81	21.22	12.200	6.65	6.10
3.600	88.51	20.07	12.400	6.46	6.00
3.800	78.24	19.04	12.600	6.28	5.91
4.000	69.58	18.11	12.800	6.11	5.82
4.200	62.24	17.26	13.000	5.94	5.73
4.400	55.96	16.50	13.200	5.79	5.65
4.600	50.57	15.80	13.400	5.64	5.56
4.800	45.90	15.15	13.600	5.50	5.48
5.000	41.84	14.56	13.800	5.36	5.41
5.200	38.29	14.02	14.000	5.23	5.33
5.400	35.17	13.51	14.200	5.11	5.26
5.600	32.42	13.04	14.400	4.99	5.19
5.800	29.98	12.60	14.600	4.88	5.12
6.000	27.82	12.19	14.800	4.77	5.05
6.200	25.88	11.80	15.000	4.67	4.98
6.400	24.14	11.44	15.200	4.57	4.92
6.600	22.58	11.11	15.400	4.47	4.86
6.800	21.16	10.79	15.600	4.38	4.80
7.000	19.89	10.49	15.800	4.29	4.74
7.200	18.73	10.20	16.000	4.20	4.68
7.400	17.67	9.93	16.200	4.12	4.62
7.600	16.71	9.68	16.400	4.04	4.57
7.800	15.82	9.43	16.600	3.96	4.51
8.000	15.01	9.20	16.800	3.89	4.46
8.200	14.27	8.99	17.000	3.82	4.41
8.400	13.58	8.78	17.200	3.75	4.36
8.600	12.95	8.58	17.400	3.68	4.31
8.800	12.36	8.39	17.600	3.62	4.26
9.000	11.82	8.20	17.800	3.55	4.22
9.200	11.31	8.03	18.000	3.49	4.17
9.400	10.84	7.86	18.200	3.44	4.13
9.600	10.41	7.70	18.400	3.38	4.08
9.800	10.00	7.55	18.600	3.32	4.04
10.000	9.61	7.40	18.800	3.27	4.00
10.200	9.26	7.26	19.000	3.22	3.96
10.400	8.92	7.13	19.200	3.17	3.92
10.600	8.60	6.99	19.400	3.12	3.88

TABLE 1

PRESSURE OR IMPULSE AS A FUNCTION OF SCALED DISTANCE

SCALED DISTANCE $\frac{1}{3}$ (FT/LB)	PRESSURE (PSIG)	SCALED IMPULSE $\frac{1}{3}$ (PSI-MS/LB)	SCALED DISTANCE $\frac{1}{3}$ (FT/LB)	PRESSURE (PSIG)	SCALED IMPULSE $\frac{1}{3}$ (PSI-MS/LB)
19.600	3.07	3.84	28.400	1.83	2.67
19.800	3.03	3.80	28.600	1.82	2.65
20.000	2.98	3.76	28.800	1.80	2.64
20.200	2.94	3.73	29.000	1.78	2.62
20.400	2.90	3.69	29.200	1.77	2.60
20.600	2.86	3.66	29.400	1.75	2.58
20.800	2.82	3.62	29.600	1.74	2.57
21.000	2.78	3.59	29.800	1.72	2.55
21.200	2.74	3.56	30.000	1.71	2.53
21.400	2.71	3.52	30.200	1.69	2.52
21.600	2.67	3.49	30.400	1.68	2.50
21.800	2.63	3.46	30.600	1.66	2.49
22.000	2.60	3.43	30.800	1.65	2.47
22.200	2.57	3.40	31.000	1.63	2.45
22.400	2.53	3.37	31.200	1.62	2.44
22.600	2.50	3.34	31.400	1.61	2.42
22.800	2.47	3.31	31.600	1.59	2.41
23.000	2.44	3.28	31.800	1.58	2.39
23.200	2.41	3.26	32.000	1.57	2.38
23.400	2.38	3.23	32.200	1.56	2.36
23.600	2.36	3.20	32.400	1.54	2.35
23.800	2.33	3.18	32.600	1.53	2.34
24.000	2.30	3.15	32.800	1.52	2.32
24.200	2.28	3.12	33.000	1.51	2.31
24.400	2.25	3.10	33.200	1.50	2.29
24.600	2.22	3.08	33.400	1.48	2.28
24.800	2.20	3.05	33.600	1.47	2.27
25.000	2.18	3.03	33.800	1.46	2.26
25.200	2.15	3.00	34.000	1.45	2.24
25.400	2.13	2.98	34.200	1.44	2.23
25.600	2.11	2.96	34.400	1.43	2.22
25.800	2.08	2.94	34.600	1.42	2.20
26.000	2.06	2.91	34.800	1.41	2.19
26.200	2.04	2.89	35.000	1.40	2.18
26.400	2.02	2.87	35.200	1.39	2.17
26.600	2.00	2.85	35.400	1.38	2.16
26.800	1.98	2.83	35.600	1.37	2.14
27.000	1.96	2.81	35.800	1.36	2.13
27.200	1.94	2.79	36.000	1.35	2.12
27.400	1.92	2.77	36.200	1.34	2.11
27.600	1.90	2.75	36.400	1.33	2.10
27.800	1.89	2.73	36.600	1.32	2.09
28.000	1.87	2.71	36.800	1.31	2.08
28.200	1.85	2.69	37.000	1.30	2.06

TABLE I

PRESSURE OR IMPULSE AS A FUNCTION OF SCALED DISTANCE

SCALED DISTANCE $\frac{1}{3}$ (FT/LB)	PRESSURE (PSIG)	SCALED IMPULSE $\frac{1}{3}$ (PSI-MB/LB)	SCALED DISTANCE $\frac{1}{3}$ (FT/LB)	PRESSURE (PSIG)	SCALED IMPULSE $\frac{1}{3}$ (PSI-MB/LB)
37.200	1.29	2.05	46.000	.99	1.67
37.400	1.28	2.04	46.200	.98	1.66
37.600	1.27	2.03	46.400	.98	1.66
37.800	1.27	2.02	46.600	.97	1.65
38.000	1.26	2.01	46.800	.97	1.64
38.200	1.25	2.00	47.000	.96	1.63
38.400	1.24	1.99	47.200	.96	1.63
38.600	1.23	1.98	47.400	.95	1.62
38.800	1.22	1.97	47.600	.94	1.61
39.000	1.22	1.96	47.800	.94	1.61
39.200	1.21	1.95	48.000	.93	1.60
39.400	1.20	1.94	48.200	.93	1.59
39.600	1.19	1.93	48.400	.93	1.59
39.800	1.19	1.92	48.600	.92	1.58
40.000	1.18	1.91	48.800	.92	1.58
40.200	1.17	1.90	49.000	.91	1.57
40.400	1.16	1.89	49.200	.91	1.56
40.600	1.16	1.89	49.400	.90	1.56
40.800	1.15	1.88	49.600	.90	1.55
41.000	1.14	1.87	49.800	.89	1.54
41.200	1.14	1.86	50.000	.89	1.54
41.400	1.13	1.85			
41.600	1.12	1.84			
41.800	1.11	1.83			
42.000	1.11	1.82			
42.200	1.10	1.82			
42.400	1.09	1.81			
42.600	1.09	1.80			
42.800	1.08	1.79			
43.000	1.08	1.78			
43.200	1.07	1.77			
43.400	1.06	1.77			
43.600	1.06	1.76			
43.800	1.05	1.75			
44.000	1.04	1.74			
44.200	1.04	1.74			
44.400	1.03	1.73			
44.600	1.03	1.72			
44.800	1.02	1.71			
45.000	1.01	1.71			
45.200	1.01	1.70			
45.400	1.00	1.69			
45.600	1.00	1.68			
45.800	.99	1.68			

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
300.00	2.060	.225	291.40	2.089	.232
299.80	2.061	.225	291.20	2.090	.232
299.60	2.061	.226	291.00	2.091	.233
299.40	2.062	.226	290.80	2.091	.233
299.20	2.063	.226	290.60	2.092	.233
299.00	2.063	.226	290.40	2.093	.233
298.80	2.064	.226	290.20	2.093	.233
298.60	2.065	.226	290.00	2.094	.233
298.40	2.065	.227	289.80	2.095	.234
298.20	2.066	.227	289.60	2.096	.234
298.00	2.067	.227	289.40	2.096	.234
297.80	2.067	.227	289.20	2.097	.234
297.60	2.068	.227	289.00	2.098	.234
297.40	2.069	.227	288.80	2.098	.234
297.20	2.069	.228	288.60	2.099	.235
297.00	2.070	.228	288.40	2.100	.235
296.80	2.071	.228	288.20	2.100	.235
296.60	2.071	.228	288.00	2.101	.235
296.40	2.072	.228	287.80	2.102	.235
296.20	2.073	.228	287.60	2.103	.235
296.00	2.073	.228	287.40	2.103	.235
295.80	2.074	.229	287.20	2.104	.236
295.60	2.075	.229	287.00	2.105	.236
295.40	2.075	.229	286.80	2.105	.236
295.20	2.076	.229	286.60	2.106	.236
295.00	2.077	.229	286.40	2.107	.236
294.80	2.078	.229	286.20	2.108	.237
294.60	2.078	.230	286.00	2.108	.237
294.40	2.079	.230	285.80	2.109	.237
294.20	2.080	.230	285.60	2.110	.237
294.00	2.080	.230	285.40	2.110	.237
293.80	2.081	.230	285.20	2.111	.237
293.60	2.082	.230	285.00	2.112	.238
293.40	2.082	.231	284.80	2.113	.238
293.20	2.083	.231	284.60	2.113	.238
293.00	2.084	.231	284.40	2.114	.238
292.80	2.084	.231	284.20	2.115	.238
292.60	2.085	.231	284.00	2.115	.239
292.40	2.086	.231	283.80	2.116	.239
292.20	2.086	.231	283.60	2.117	.239
292.00	2.087	.232	283.40	2.118	.239
291.80	2.088	.232	283.20	2.118	.239
291.60	2.089	.232	283.00	2.119	.239

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I	
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
282.80	2.120		.239		274.20	2.152		.247	
282.60	2.121		.240		274.00	2.152		.247	
282.40	2.121		.240		273.80	2.153		.248	
282.20	2.122		.240		273.60	2.154		.248	
282.00	2.123		.240		273.40	2.155		.248	
281.80	2.123		.240		273.20	2.156		.248	
281.60	2.124		.240		273.00	2.156		.248	
281.40	2.125		.241		272.80	2.157		.249	
281.20	2.126		.241		272.60	2.158		.249	
281.00	2.126		.241		272.40	2.159		.249	
280.80	2.127		.241		272.20	2.159		.249	
280.60	2.128		.241		272.00	2.160		.249	
280.40	2.129		.241		271.80	2.161		.249	
280.20	2.129		.242		271.60	2.162		.250	
280.00	2.130		.242		271.40	2.162		.250	
279.80	2.131		.242		271.20	2.163		.250	
279.60	2.132		.242		271.00	2.164		.250	
279.40	2.132		.242		270.80	2.165		.250	
279.20	2.133		.243		270.60	2.165		.251	
279.00	2.134		.243		270.40	2.166		.251	
278.80	2.134		.243		270.20	2.167		.251	
278.60	2.135		.243		270.00	2.168		.251	
278.40	2.136		.243		269.80	2.169		.251	
278.20	2.137		.243		269.60	2.169		.252	
278.00	2.137		.244		269.40	2.170		.252	
277.80	2.138		.244		269.20	2.171		.252	
277.60	2.139		.244		269.00	2.172		.252	
277.40	2.140		.244		268.80	2.172		.252	
277.20	2.140		.244		268.60	2.173		.253	
277.00	2.141		.245		268.40	2.174		.253	
276.80	2.142		.245		268.20	2.175		.253	
276.60	2.143		.245		268.00	2.176		.253	
276.40	2.143		.245		267.80	2.176		.253	
276.20	2.144		.245		267.60	2.177		.254	
276.00	2.145		.245		267.40	2.178		.254	
275.80	2.146		.246		267.20	2.179		.254	
275.60	2.146		.246		267.00	2.179		.254	
275.40	2.147		.246		266.80	2.180		.254	
275.20	2.148		.246		266.60	2.181		.254	
275.00	2.149		.246		266.40	2.182		.255	
274.80	2.149		.247		266.20	2.183		.255	
274.60	2.150		.247		266.00	2.183		.255	
274.40	2.151		.247		265.80	2.184		.255	

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR $1/3$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR $1/3$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I
	$1/3$ (FT/LB)	$1/3$ (FT/LB)		$1/3$ (FT/LB)	$1/3$ (FT/LB)
265.60	2.185	.255	257.00	2.220	.264
265.40	2.186	.255	256.80	2.221	.264
265.20	2.187	.256	256.60	2.221	.265
265.00	2.187	.256	256.40	2.222	.265
264.80	2.188	.256	256.20	2.223	.265
264.60	2.189	.256	256.00	2.224	.265
264.40	2.190	.256	255.80	2.225	.266
264.20	2.191	.257	255.60	2.226	.266
264.00	2.191	.257	255.40	2.226	.266
263.80	2.192	.257	255.20	2.227	.266
263.60	2.193	.257	255.00	2.228	.266
263.40	2.194	.257	254.80	2.229	.267
263.20	2.195	.258	254.60	2.230	.267
263.00	2.195	.258	254.40	2.231	.267
262.80	2.196	.258	254.20	2.232	.267
262.60	2.197	.258	254.00	2.232	.267
262.40	2.198	.258	253.80	2.233	.268
262.20	2.199	.259	253.60	2.234	.268
262.00	2.199	.259	253.40	2.235	.268
261.80	2.200	.259	253.20	2.236	.268
261.60	2.201	.259	253.00	2.237	.269
261.40	2.202	.259	252.80	2.237	.269
261.20	2.203	.260	252.60	2.238	.269
261.00	2.203	.260	252.40	2.239	.269
260.80	2.204	.260	252.20	2.240	.269
260.60	2.205	.260	252.00	2.241	.270
260.40	2.206	.260	251.80	2.242	.270
260.20	2.207	.261	251.60	2.243	.270
260.00	2.207	.261	251.40	2.243	.270
259.80	2.208	.261	251.20	2.244	.270
259.60	2.209	.261	251.00	2.245	.271
259.40	2.210	.262	250.80	2.246	.271
259.20	2.211	.262	250.60	2.247	.271
259.00	2.212	.262	250.40	2.248	.271
258.80	2.212	.262	250.20	2.249	.272
258.60	2.213	.262	250.00	2.249	.272
258.40	2.214	.263	249.80	2.250	.272
258.20	2.215	.263	249.60	2.251	.272
258.00	2.216	.263	249.40	2.252	.272
257.80	2.217	.263	249.20	2.253	.273
257.60	2.217	.263	249.00	2.254	.273
257.40	2.218	.264	248.80	2.255	.273
257.20	2.219	.264	248.60	2.255	.273

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I	
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
248.40	2.256		.273		239.80	2.295		.284	
248.20	2.257		.274		239.60	2.295		.284	
248.00	2.258		.274		239.40	2.296		.284	
247.80	2.259		.274		239.20	2.297		.284	
247.60	2.260		.274		239.00	2.298		.285	
247.40	2.261		.275		238.80	2.299		.285	
247.20	2.262		.275		238.60	2.300		.285	
247.00	2.262		.275		238.40	2.301		.285	
246.80	2.263		.275		238.20	2.302		.286	
246.60	2.264		.275		238.00	2.303		.286	
246.40	2.265		.276		237.80	2.304		.286	
246.20	2.266		.276		237.60	2.305		.286	
246.00	2.267		.276		237.40	2.306		.287	
245.80	2.268		.276		237.20	2.306		.287	
245.60	2.269		.277		237.00	2.307		.287	
245.40	2.269		.277		236.80	2.308		.287	
245.20	2.270		.277		236.60	2.309		.288	
245.00	2.271		.277		236.40	2.310		.288	
244.80	2.272		.278		236.20	2.311		.288	
244.60	2.273		.278		236.00	2.312		.288	
244.40	2.274		.278		235.80	2.313		.289	
244.20	2.275		.278		235.60	2.314		.289	
244.00	2.276		.278		235.40	2.315		.289	
243.80	2.277		.279		235.20	2.316		.289	
243.60	2.277		.279		235.00	2.317		.290	
243.40	2.278		.279		234.80	2.318		.290	
243.20	2.279		.279		234.60	2.319		.290	
243.00	2.280		.280		234.40	2.320		.290	
242.80	2.281		.280		234.20	2.320		.291	
242.60	2.282		.280		234.00	2.321		.291	
242.40	2.283		.280		233.80	2.322		.291	
242.20	2.284		.281		233.60	2.323		.291	
242.00	2.285		.281		233.40	2.324		.292	
241.80	2.285		.281		233.20	2.325		.292	
241.60	2.286		.281		233.00	2.326		.292	
241.40	2.287		.282		232.80	2.327		.292	
241.20	2.288		.282		232.60	2.328		.293	
241.00	2.289		.282		232.40	2.329		.293	
240.80	2.290		.282		232.20	2.330		.293	
240.60	2.291		.282		232.00	2.331		.293	
240.40	2.292		.283		231.80	2.332		.294	
240.20	2.293		.283		231.60	2.333		.294	
240.00	2.294		.283		231.40	2.334		.294	

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I	
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	
231.20	2.335		.294		222.60	2.377		.306	
231.00	2.336		.295		222.40	2.378		.306	
230.80	2.337		.295		222.20	2.379		.307	
230.60	2.338		.295		222.00	2.380		.307	
230.40	2.339		.295		221.80	2.381		.307	
230.20	2.340		.296		221.60	2.382		.308	
230.00	2.341		.296		221.40	2.383		.308	
229.80	2.341		.296		221.20	2.384		.308	
229.60	2.342		.296		221.00	2.385		.308	
229.40	2.343		.297		220.80	2.386		.309	
229.20	2.344		.297		220.60	2.387		.309	
229.00	2.345		.297		220.40	2.388		.309	
228.80	2.346		.297		220.20	2.389		.310	
228.60	2.347		.298		220.00	2.390		.310	
228.40	2.348		.298		219.80	2.391		.310	
228.20	2.349		.298		219.60	2.392		.310	
228.00	2.350		.298		219.40	2.393		.311	
227.80	2.351		.299		219.20	2.394		.311	
227.60	2.352		.299		219.00	2.395		.311	
227.40	2.353		.299		218.80	2.396		.312	
227.20	2.354		.300		218.60	2.397		.312	
227.00	2.355		.300		218.40	2.399		.312	
226.80	2.356		.300		218.20	2.400		.313	
226.60	2.357		.300		218.00	2.401		.313	
226.40	2.358		.301		217.80	2.402		.313	
226.20	2.359		.301		217.60	2.403		.313	
226.00	2.360		.301		217.40	2.404		.314	
225.80	2.361		.301		217.20	2.405		.314	
225.60	2.362		.302		217.00	2.406		.314	
225.40	2.363		.302		216.80	2.407		.315	
225.20	2.364		.302		216.60	2.408		.315	
225.00	2.365		.303		216.40	2.409		.315	
224.80	2.366		.303		216.20	2.410		.315	
224.60	2.367		.303		216.00	2.411		.316	
224.40	2.368		.303		215.80	2.412		.316	
224.20	2.369		.304		215.60	2.413		.316	
224.00	2.370		.304		215.40	2.414		.317	
223.80	2.371		.304		215.20	2.415		.317	
223.60	2.372		.305		215.00	2.416		.317	
223.40	2.373		.305		214.80	2.417		.318	
223.20	2.374		.305		214.60	2.418		.318	
223.00	2.375		.305		214.40	2.420		.318	
222.80	2.376		.306		214.20	2.421		.319	

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I	
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	
214.00	2.422	.319			205.40	2.469	.333		
213.80	2.423	.319			205.20	2.470	.333		
213.60	2.424	.319			205.00	2.471	.333		
213.40	2.425	.319			204.80	2.472	.334		
213.20	2.426	.320			204.60	2.473	.334		
213.00	2.427	.320			204.40	2.474	.334		
212.80	2.428	.320			204.20	2.476	.335		
212.60	2.429	.321			204.00	2.477	.335		
212.40	2.430	.321			203.80	2.478	.335		
212.20	2.431	.321			203.60	2.479	.336		
212.00	2.432	.322			203.40	2.480	.336		
211.80	2.433	.322			203.20	2.481	.336		
211.60	2.435	.322			203.00	2.482	.337		
211.40	2.436	.323			202.80	2.484	.337		
211.20	2.437	.323			202.60	2.485	.337		
211.00	2.438	.323			202.40	2.486	.338		
210.80	2.439	.323			202.20	2.487	.338		
210.60	2.440	.324			202.00	2.488	.338		
210.40	2.441	.324			201.80	2.489	.339		
210.20	2.442	.324			201.60	2.491	.339		
210.00	2.443	.325			201.40	2.492	.339		
209.80	2.444	.325			201.20	2.493	.340		
209.60	2.445	.325			201.00	2.494	.340		
209.40	2.447	.326			200.80	2.495	.340		
209.20	2.448	.326			200.60	2.496	.341		
209.00	2.449	.326			200.40	2.498	.341		
208.80	2.450	.327			200.20	2.499	.341		
208.60	2.451	.327			200.00	2.500	.342		
208.40	2.452	.327			199.80	2.501	.342		
208.20	2.453	.328			199.60	2.502	.342		
208.00	2.454	.328			199.40	2.503	.343		
207.80	2.455	.328			199.20	2.505	.343		
207.60	2.457	.329			199.00	2.506	.343		
207.40	2.458	.329			198.80	2.507	.344		
207.20	2.459	.329			198.60	2.508	.344		
207.00	2.460	.330			198.40	2.509	.345		
206.80	2.461	.330			198.20	2.510	.345		
206.60	2.462	.330			198.00	2.512	.345		
206.40	2.463	.331			197.80	2.513	.346		
206.20	2.464	.331			197.60	2.514	.346		
206.00	2.465	.331			197.40	2.515	.346		
205.80	2.467	.332			197.20	2.516	.347		
205.60	2.468	.332			197.00	2.518	.347		

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
196.80	2.519	.347	188.20	2.572	.364
196.60	2.520	.347	188.00	2.573	.364
196.40	2.521	.348	187.80	2.574	.365
196.20	2.522	.348	187.60	2.576	.365
196.00	2.524	.349	187.40	2.577	.365
195.80	2.525	.349	187.20	2.578	.366
195.60	2.526	.349	187.00	2.580	.366
195.40	2.527	.350	186.80	2.581	.367
195.20	2.528	.350	186.60	2.582	.367
195.00	2.530	.350	186.40	2.583	.367
194.80	2.531	.351	186.20	2.585	.368
194.60	2.532	.351	186.00	2.586	.368
194.40	2.533	.351	185.80	2.587	.369
194.20	2.534	.352	185.60	2.589	.369
194.00	2.536	.352	185.40	2.590	.369
193.80	2.537	.353	185.20	2.591	.370
193.60	2.538	.353	185.00	2.592	.370
193.40	2.539	.353	184.80	2.594	.371
193.20	2.541	.354	184.60	2.595	.371
193.00	2.542	.354	184.40	2.596	.371
192.80	2.543	.354	184.20	2.598	.372
192.60	2.544	.355	184.00	2.599	.372
192.40	2.546	.355	183.80	2.600	.373
192.20	2.547	.356	183.60	2.602	.373
192.00	2.548	.356	183.40	2.603	.373
191.80	2.549	.356	183.20	2.604	.374
191.60	2.550	.357	183.00	2.606	.374
191.40	2.552	.357	182.80	2.607	.375
191.20	2.553	.357	182.60	2.608	.375
191.00	2.554	.358	182.40	2.610	.376
190.80	2.555	.358	182.20	2.611	.376
190.60	2.557	.359	182.00	2.612	.376
190.40	2.558	.359	181.80	2.614	.377
190.20	2.559	.359	181.60	2.615	.377
190.00	2.560	.360	181.40	2.616	.378
189.80	2.562	.360	181.20	2.618	.378
189.60	2.563	.361	181.00	2.619	.379
189.40	2.564	.361	180.80	2.620	.379
189.20	2.566	.361	180.60	2.622	.379
189.00	2.567	.362	180.40	2.623	.380
188.80	2.568	.362	180.20	2.624	.380
188.60	2.569	.363	180.00	2.626	.381
188.40	2.571	.363	179.80	2.627	.381

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMDA-P	LAMDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMDA-P	LAMDA-I
	$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)		$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)
179.80	2.628	.381	171.00	2.689	.401
179.40	2.630	.382	170.80	2.690	.402
179.20	2.631	.382	170.60	2.692	.402
179.00	2.632	.382	170.40	2.693	.403
178.80	2.634	.383	170.20	2.695	.403
178.60	2.635	.383	170.00	2.696	.404
178.40	2.637	.384	169.80	2.697	.404
178.20	2.638	.384	169.60	2.699	.405
178.00	2.639	.385	169.40	2.700	.405
177.80	2.641	.385	169.20	2.702	.406
177.60	2.642	.386	169.00	2.703	.406
177.40	2.643	.386	168.80	2.705	.407
177.20	2.645	.386	168.60	2.706	.407
177.00	2.646	.387	168.40	2.708	.408
176.80	2.648	.387	168.20	2.709	.408
176.60	2.649	.388	168.00	2.711	.409
176.40	2.650	.388	167.80	2.712	.409
176.20	2.652	.389	167.60	2.714	.410
176.00	2.653	.389	167.40	2.715	.410
175.80	2.655	.390	167.20	2.717	.411
175.60	2.656	.390	167.00	2.718	.411
175.40	2.657	.391	166.80	2.720	.412
175.20	2.659	.391	166.60	2.721	.412
175.00	2.660	.391	166.40	2.723	.413
174.80	2.662	.392	166.20	2.724	.413
174.60	2.663	.392	166.00	2.726	.414
174.40	2.664	.393	165.80	2.727	.414
174.20	2.666	.393	165.60	2.729	.415
174.00	2.667	.394	165.40	2.730	.415
173.80	2.669	.394	165.20	2.732	.416
173.60	2.670	.395	165.00	2.733	.416
173.40	2.671	.395	164.80	2.735	.417
173.20	2.673	.396	164.60	2.736	.417
173.00	2.674	.396	164.40	2.738	.418
172.80	2.676	.397	164.20	2.739	.418
172.60	2.677	.397	164.00	2.741	.419
172.40	2.679	.397	163.80	2.743	.419
172.20	2.680	.398	163.60	2.744	.420
172.00	2.681	.398	163.40	2.746	.420
171.80	2.683	.399	163.20	2.747	.421
171.60	2.684	.399	163.00	2.749	.421
171.40	2.686	.400	162.80	2.750	.422
171.20	2.687	.400	162.60	2.752	.423

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I
	$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)		$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)
162.40	2.753	.423	153.80	2.823	.447
162.20	2.755	.423	153.60	2.825	.448
162.00	2.756	.424	153.40	2.826	.449
161.80	2.758	.424	153.20	2.828	.449
161.60	2.760	.425	153.00	2.830	.450
161.40	2.761	.425	152.80	2.831	.450
161.20	2.763	.426	152.60	2.833	.451
161.00	2.764	.426	152.40	2.835	.452
160.80	2.766	.427	152.20	2.836	.452
160.60	2.767	.427	152.00	2.838	.453
160.40	2.769	.428	151.80	2.840	.453
160.20	2.771	.429	151.60	2.842	.454
160.00	2.772	.429	151.40	2.843	.455
159.80	2.774	.430	151.20	2.845	.455
159.60	2.775	.430	151.00	2.847	.456
159.40	2.777	.431	150.80	2.848	.457
159.20	2.779	.431	150.60	2.850	.457
159.00	2.780	.432	150.40	2.852	.458
158.80	2.782	.432	150.20	2.854	.458
158.60	2.783	.433	150.00	2.855	.459
158.40	2.785	.433	149.80	2.857	.460
158.20	2.787	.434	149.60	2.859	.460
158.00	2.788	.435	149.40	2.861	.461
157.80	2.790	.435	149.20	2.862	.462
157.60	2.792	.436	149.00	2.864	.462
157.40	2.793	.436	148.80	2.866	.463
157.20	2.795	.437	148.60	2.868	.463
157.00	2.796	.437	148.40	2.869	.464
156.80	2.798	.438	148.20	2.871	.465
156.60	2.800	.439	148.00	2.873	.465
156.40	2.801	.439	147.80	2.875	.466
156.20	2.803	.440	147.60	2.876	.467
156.00	2.805	.440	147.40	2.878	.467
155.80	2.806	.441	147.20	2.880	.468
155.60	2.808	.441	147.00	2.882	.469
155.40	2.810	.442	146.80	2.884	.469
155.20	2.811	.443	146.60	2.885	.470
155.00	2.813	.443	146.40	2.887	.471
154.80	2.815	.444	146.20	2.889	.471
154.60	2.816	.444	146.00	2.891	.472
154.40	2.818	.445	145.80	2.893	.473
154.20	2.820	.446	145.60	2.894	.473
154.00	2.821	.446	145.40	2.896	.474

TABLE 11

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I
	$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)		$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)
145.20	2.898	.474	136.60	2.979	.505
145.00	2.900	.475	136.40	2.981	.506
144.80	2.902	.475	136.20	2.983	.507
144.60	2.903	.476	136.00	2.985	.508
144.40	2.905	.477	135.80	2.987	.508
144.20	2.907	.477	135.60	2.989	.509
144.00	2.909	.478	135.40	2.991	.510
143.80	2.911	.479	135.20	2.993	.511
143.60	2.913	.479	135.00	2.995	.511
143.40	2.914	.480	134.80	2.997	.512
143.20	2.916	.481	134.60	2.999	.513
143.00	2.918	.481	134.40	3.001	.514
142.80	2.920	.482	134.20	3.003	.515
142.60	2.922	.483	134.00	3.006	.515
142.40	2.924	.483	133.80	3.008	.516
142.20	2.926	.484	133.60	3.010	.517
142.00	2.928	.485	133.40	3.012	.518
141.80	2.929	.486	133.20	3.014	.519
141.60	2.931	.486	133.00	3.016	.519
141.40	2.933	.487	132.80	3.018	.520
141.20	2.935	.488	132.60	3.020	.521
141.00	2.937	.488	132.40	3.022	.522
140.80	2.939	.489	132.20	3.024	.523
140.60	2.941	.490	132.00	3.026	.523
140.40	2.943	.491	131.80	3.028	.524
140.20	2.945	.491	131.60	3.030	.525
140.00	2.946	.492	131.40	3.032	.526
139.80	2.948	.493	131.20	3.034	.527
139.60	2.950	.493	131.00	3.036	.527
139.40	2.952	.494	130.80	3.039	.528
139.20	2.954	.495	130.60	3.041	.529
139.00	2.956	.496	130.40	3.043	.530
138.80	2.958	.496	130.20	3.045	.531
138.60	2.960	.497	130.00	3.047	.532
138.40	2.962	.498	129.80	3.049	.532
138.20	2.964	.499	129.60	3.051	.533
138.00	2.966	.499	129.40	3.053	.534
137.80	2.968	.500	129.20	3.055	.535
137.60	2.970	.501	129.00	3.058	.536
137.40	2.972	.501	128.80	3.060	.537
137.20	2.974	.502	128.60	3.062	.538
137.00	2.976	.503	128.40	3.064	.538
136.80	2.977	.504	128.20	3.066	.539

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR $\frac{1}{3}$ (PSI-MS/LB)	LAMBDA-P	LAMBDA-I
	$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)		$\frac{1}{3}$ (FT/LB)	$\frac{1}{3}$ (FT/LB)
128.00	3.068	.539	119.40	3.166	.580
127.80	3.070	.540	119.20	3.168	.581
127.60	3.073	.541	119.00	3.171	.582
127.40	3.075	.542	118.80	3.173	.583
127.20	3.077	.543	118.60	3.175	.584
127.00	3.079	.544	118.40	3.178	.585
126.80	3.081	.544	118.20	3.180	.586
126.60	3.084	.545	118.00	3.183	.587
126.40	3.086	.546	117.80	3.185	.588
126.20	3.088	.547	117.60	3.187	.589
126.00	3.090	.548	117.40	3.190	.590
125.80	3.092	.549	117.20	3.192	.591
125.60	3.095	.550	117.00	3.195	.592
125.40	3.097	.551	116.80	3.197	.593
125.20	3.099	.552	116.60	3.200	.594
125.00	3.101	.553	116.40	3.202	.595
124.80	3.103	.553	116.20	3.204	.596
124.60	3.106	.554	116.00	3.207	.598
124.40	3.108	.555	115.80	3.209	.599
124.20	3.110	.556	115.60	3.212	.600
124.00	3.112	.557	115.40	3.214	.601
123.80	3.115	.558	115.20	3.217	.602
123.60	3.117	.559	115.00	3.219	.603
123.40	3.119	.560	114.80	3.222	.604
123.20	3.122	.561	114.60	3.224	.605
123.00	3.124	.562	114.40	3.227	.606
122.80	3.126	.563	114.20	3.229	.607
122.60	3.128	.564	114.00	3.232	.608
122.40	3.131	.565	113.80	3.235	.609
122.20	3.133	.566	113.60	3.237	.611
122.00	3.135	.566	113.40	3.240	.612
121.80	3.138	.567	113.20	3.242	.613
121.60	3.140	.568	113.00	3.245	.614
121.40	3.142	.569	112.80	3.247	.615
121.20	3.145	.570	112.60	3.250	.616
121.00	3.147	.571	112.40	3.252	.617
120.80	3.149	.572	112.20	3.255	.618
120.60	3.152	.573	112.00	3.258	.619
120.40	3.154	.574	111.80	3.260	.621
120.20	3.156	.575	111.60	3.263	.622
120.00	3.159	.576	111.40	3.265	.623
119.80	3.161	.577	111.20	3.268	.624
119.60	3.163	.578	111.00	3.271	.625

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I	
	(FT/LB)	(FT/LB)	(FT/LB)	(FT/LB)		(FT/LB)	(FT/LB)	(FT/LB)	(FT/LB)
110.80	3.273	.625	102.20	3.393	.681				
110.60	3.276	.626	102.00	3.396	.682				
110.40	3.279	.628	101.80	3.399	.683				
110.20	3.281	.629	101.60	3.402	.685				
110.00	3.284	.630	101.40	3.405	.686				
109.80	3.287	.631	101.20	3.408	.687				
109.60	3.289	.632	101.00	3.411	.689				
109.40	3.292	.633	100.80	3.414	.690				
109.20	3.295	.635	100.60	3.417	.692				
109.00	3.297	.636	100.40	3.420	.693				
108.80	3.300	.637	100.20	3.423	.694				
108.60	3.303	.638	100.00	3.426	.696				
108.40	3.305	.639	99.80	3.429	.697				
108.20	3.308	.641	99.60	3.432	.699				
108.00	3.311	.642	99.40	3.435	.700				
107.80	3.314	.643	99.20	3.438	.702				
107.60	3.316	.644	99.00	3.441	.703				
107.40	3.319	.645	98.80	3.444	.705				
107.20	3.322	.647	98.60	3.447	.706				
107.00	3.325	.648	98.40	3.451	.707				
106.80	3.327	.649	98.20	3.454	.709				
106.60	3.330	.650	98.00	3.457	.710				
106.40	3.333	.652	97.80	3.460	.712				
106.20	3.336	.653	97.60	3.463	.713				
106.00	3.339	.654	97.40	3.466	.715				
105.80	3.341	.655	97.20	3.469	.716				
105.60	3.344	.657	97.00	3.472	.718				
105.40	3.347	.658	96.80	3.476	.720				
105.20	3.350	.659	96.60	3.479	.721				
105.00	3.353	.661	96.40	3.482	.723				
104.80	3.355	.662	96.20	3.485	.724				
104.60	3.358	.663	96.00	3.488	.726				
104.40	3.361	.664	95.80	3.492	.727				
104.20	3.364	.666	95.60	3.495	.729				
104.00	3.367	.667	95.40	3.498	.730				
103.80	3.370	.668	95.20	3.501	.732				
103.60	3.373	.670	95.00	3.505	.734				
103.40	3.376	.671	94.80	3.508	.735				
103.20	3.378	.672	94.60	3.511	.737				
103.00	3.381	.674	94.40	3.514	.738				
102.80	3.384	.675	94.20	3.518	.740				
102.60	3.387	.676	94.00	3.521	.742				
102.40	3.390	.678	93.80	3.524	.743				

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P		LAMBDA-I	
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}	
93.60	3.528	.743			85.00	3.680	.822		
93.40	3.531	.745			84.80	3.684	.824		
93.20	3.534	.746			84.60	3.688	.826		
93.00	3.538	.748			84.40	3.692	.828		
92.80	3.541	.750			84.20	3.696	.830		
92.60	3.544	.751			84.00	3.700	.832		
92.40	3.548	.753			83.80	3.703	.834		
92.20	3.551	.755			83.60	3.707	.836		
92.00	3.555	.756			83.40	3.711	.838		
91.80	3.558	.758			83.20	3.715	.841		
91.60	3.561	.760			83.00	3.719	.843		
91.40	3.565	.761			82.80	3.723	.845		
91.20	3.568	.763			82.60	3.727	.847		
91.00	3.572	.765			82.40	3.731	.849		
90.80	3.575	.767			82.20	3.735	.851		
90.60	3.579	.768			82.00	3.739	.853		
90.40	3.582	.770			81.80	3.743	.855		
90.20	3.586	.772			81.60	3.747	.857		
90.00	3.589	.774			81.40	3.751	.860		
89.80	3.593	.775			81.20	3.755	.862		
89.60	3.596	.777			81.00	3.759	.864		
89.40	3.600	.779			80.80	3.763	.866		
89.20	3.603	.781			80.60	3.767	.868		
89.00	3.607	.783			80.40	3.771	.871		
88.80	3.610	.784			80.20	3.775	.873		
88.60	3.614	.786			80.00	3.779	.875		
88.40	3.618	.788			79.80	3.784	.877		
88.20	3.621	.790			79.60	3.788	.880		
88.00	3.625	.792			79.40	3.792	.882		
87.80	3.628	.793			79.20	3.796	.884		
87.60	3.632	.795			79.00	3.800	.886		
87.40	3.636	.797			78.80	3.804	.889		
87.20	3.639	.799			78.60	3.809	.891		
87.00	3.643	.801			78.40	3.813	.893		
86.80	3.647	.803			78.20	3.817	.896		
86.60	3.650	.805			78.00	3.821	.898		
86.40	3.654	.807			77.80	3.826	.900		
86.20	3.658	.809			77.60	3.830	.903		
86.00	3.662	.810			77.40	3.834	.905		
85.80	3.665	.812			77.20	3.839	.908		
85.60	3.669	.814			77.00	3.843	.910		
85.40	3.673	.816			76.80	3.847	.913		
85.20	3.677	.818			76.60	3.852	.915		

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) 1/3	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) 1/3	LAMBDA-P		LAMBDA-I	
	(FT/LB)	(FT/LB)	(FT/LB)	(FT/LB)		(FT/LB)	(FT/LB)	(FT/LB)	(FT/LB)
76.40	3.856		.913		67.80	4.062		1.037	
76.20	3.861		.917		67.60	4.067		1.040	
76.00	3.865		.920		67.40	4.073		1.044	
75.80	3.870		.922		67.20	4.078		1.047	
75.60	3.874		.925		67.00	4.083		1.050	
75.40	3.878		.927		66.80	4.088		1.053	
75.20	3.883		.930		66.60	4.094		1.056	
75.00	3.887		.932		66.40	4.099		1.060	
74.80	3.892		.935		66.20	4.104		1.063	
74.60	3.897		.938		66.00	4.110		1.066	
74.40	3.901		.940		65.80	4.115		1.070	
74.20	3.906		.943		65.60	4.121		1.073	
74.00	3.910		.945		65.40	4.126		1.076	
73.80	3.915		.948		65.20	4.132		1.080	
73.60	3.920		.951		65.00	4.137		1.083	
73.40	3.924		.953		64.80	4.143		1.087	
73.20	3.929		.956		64.60	4.148		1.090	
73.00	3.934		.959		64.40	4.154		1.094	
72.80	3.938		.961		64.20	4.159		1.097	
72.60	3.943		.964		64.00	4.165		1.101	
72.40	3.948		.967		63.80	4.171		1.104	
72.20	3.952		.970		63.60	4.176		1.106	
72.00	3.957		.972		63.40	4.182		1.111	
71.80	3.962		.975		63.20	4.188		1.115	
71.60	3.967		.978		63.00	4.194		1.119	
71.40	3.972		.981		62.80	4.199		1.122	
71.20	3.977		.984		62.60	4.205		1.126	
71.00	3.981		.986		62.40	4.211		1.130	
70.80	3.986		.989		62.20	4.217		1.133	
70.60	3.991		.992		62.00	4.223		1.137	
70.40	3.996		.995		61.80	4.229		1.141	
70.20	4.001		.998		61.60	4.235		1.145	
70.00	4.006		1.001		61.40	4.241		1.148	
69.80	4.011		1.004		61.20	4.247		1.152	
69.60	4.016		1.007		61.00	4.253		1.156	
69.40	4.021		1.010		60.80	4.259		1.160	
69.20	4.026		1.013		60.60	4.265		1.164	
69.00	4.031		1.016		60.40	4.271		1.168	
68.80	4.036		1.019		60.20	4.277		1.172	
68.60	4.041		1.022		60.00	4.283		1.176	
68.40	4.047		1.025		59.80	4.290		1.180	
68.20	4.052		1.029		59.60	4.296		1.184	
68.00	4.057		1.031		59.40	4.302		1.188	

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) 1/3	LAMBDA-P		LAMBDA-I		PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) 1/3	LAMBDA-P		LAMBDA-I	
	(FT/LB) 1/3	(FT/LB) 1/3	(FT/LB) 1/3	(FT/LB) 1/3		(FT/LB) 1/3	(FT/LB) 1/3	(FT/LB) 1/3	
59.20	4.308	1.188	50.60	4.611	1.401				
59.00	4.315	1.192	50.40	4.619	1.407				
58.80	4.321	1.197	50.20	4.627	1.413				
58.60	4.327	1.201	50.00	4.635	1.419				
58.40	4.334	1.205	49.80	4.643	1.424				
58.20	4.340	1.209	49.60	4.651	1.430				
58.00	4.347	1.213	49.40	4.659	1.436				
57.80	4.353	1.218	49.20	4.668	1.442				
57.60	4.360	1.222	49.00	4.676	1.448				
57.40	4.366	1.225	48.80	4.684	1.454				
57.20	4.373	1.231	48.60	4.692	1.461				
57.00	4.380	1.235	48.40	4.701	1.467				
56.80	4.386	1.240	48.20	4.709	1.473				
56.60	4.393	1.244	48.00	4.718	1.479				
56.40	4.400	1.249	47.80	4.726	1.486				
56.20	4.406	1.253	47.60	4.735	1.492				
56.00	4.413	1.258	47.40	4.744	1.499				
55.80	4.420	1.262	47.20	4.752	1.505				
55.60	4.427	1.267	47.00	4.761	1.512				
55.40	4.434	1.272	46.80	4.770	1.518				
55.20	4.441	1.277	46.60	4.779	1.525				
55.00	4.448	1.281	46.40	4.788	1.532				
54.80	4.455	1.286	46.20	4.796	1.539				
54.60	4.462	1.291	46.00	4.805	1.546				
54.40	4.469	1.296	45.80	4.815	1.553				
54.20	4.476	1.301	45.60	4.824	1.560				
54.00	4.483	1.306	45.40	4.833	1.567				
53.80	4.490	1.311	45.20	4.842	1.574				
53.60	4.494	1.316	45.00	4.851	1.581				
53.40	4.505	1.321	44.80	4.861	1.588				
53.20	4.512	1.326	44.60	4.870	1.596				
53.00	4.520	1.331	44.40	4.880	1.603				
52.80	4.527	1.336	44.20	4.889	1.610				
52.60	4.535	1.341	44.00	4.899	1.618				
52.40	4.542	1.346	43.80	4.909	1.626				
52.20	4.550	1.352	43.60	4.918	1.633				
52.00	4.557	1.357	43.40	4.928	1.641				
51.80	4.565	1.362	43.20	4.938	1.649				
51.60	4.572	1.368	43.00	4.948	1.657				
51.40	4.580	1.373	42.80	4.958	1.665				
51.20	4.588	1.379	42.60	4.968	1.673				
51.00	4.596	1.384	42.40	4.978	1.681				
50.80	4.603	1.390	42.20	4.989	1.689				

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
42.00	4.999	1.689	33.40	5.524	2.149
41.80	5.009	1.697	33.20	5.538	2.162
41.60	5.020	1.706	33.00	5.553	2.176
41.40	5.030	1.714	32.80	5.568	2.190
41.20	5.041	1.723	32.60	5.583	2.203
41.00	5.051	1.731	32.40	5.598	2.217
40.80	5.062	1.740	32.20	5.613	2.232
40.60	5.073	1.749	32.00	5.629	2.246
40.40	5.084	1.758	31.80	5.644	2.261
40.20	5.095	1.767	31.60	5.660	2.275
40.00	5.106	1.776	31.40	5.676	2.290
39.80	5.117	1.785	31.20	5.692	2.305
39.60	5.128	1.794	31.00	5.708	2.321
39.40	5.140	1.803	30.80	5.724	2.336
39.20	5.151	1.813	30.60	5.741	2.352
39.00	5.162	1.822	30.40	5.757	2.368
38.80	5.174	1.832	30.20	5.774	2.384
38.60	5.186	1.842	30.00	5.791	2.401
38.40	5.197	1.851	29.80	5.808	2.417
38.20	5.209	1.861	29.60	5.826	2.434
38.00	5.221	1.871	29.40	5.843	2.451
37.80	5.233	1.882	29.20	5.861	2.468
37.60	5.245	1.892	29.00	5.879	2.486
37.40	5.257	1.902	28.80	5.897	2.504
37.20	5.270	1.913	28.60	5.915	2.522
37.00	5.282	1.923	28.40	5.933	2.540
36.80	5.295	1.934	28.20	5.952	2.559
36.60	5.307	1.945	28.00	5.971	2.578
36.40	5.320	1.956	27.80	5.990	2.597
36.20	5.333	1.967	27.60	6.009	2.616
36.00	5.346	1.978	27.40	6.029	2.636
35.80	5.359	1.989	27.20	6.048	2.656
35.60	5.372	2.001	27.00	6.068	2.676
35.40	5.385	2.012	26.80	6.088	2.697
35.20	5.398	2.024	26.60	6.109	2.718
35.00	5.412	2.036	26.40	6.129	2.739
34.80	5.425	2.048	26.20	6.150	2.761
34.60	5.439	2.060	26.00	6.171	2.783
34.40	5.453	2.072	25.80	6.193	2.805
34.20	5.467	2.085	25.60	6.214	2.828
34.00	5.481	2.097	25.40	6.236	2.851
33.80	5.495	2.110	25.20	6.258	2.874
33.60	5.509	2.123	25.00	6.281	2.898

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I	PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}		(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
24.80	6.503	2.898	16.20	7.673	4.540
24.60	6.526	2.922	16.00	7.719	4.599
24.40	6.550	2.946	15.80	7.765	4.659
24.20	6.573	2.971	15.60	7.813	4.721
24.00	6.597	2.997	15.40	7.862	4.785
23.80	6.421	3.022	15.20	7.911	4.850
23.60	6.446	3.049	15.00	7.962	4.917
23.40	6.471	3.075	14.80	8.014	4.986
23.20	6.496	3.103	14.60	8.067	5.057
23.00	6.522	3.130	14.40	8.121	5.130
22.80	6.547	3.158	14.20	8.176	5.205
22.60	6.574	3.187	14.00	8.233	5.283
22.40	6.600	3.216	13.80	8.291	5.362
22.20	6.627	3.246	13.60	8.351	5.444
22.00	6.655	3.276	13.40	8.412	5.529
21.80	6.682	3.307	13.20	8.474	5.616
21.60	6.711	3.338	13.00	8.539	5.706
21.40	6.739	3.370	12.80	8.604	5.799
21.20	6.768	3.403	12.60	8.672	5.894
21.00	6.798	3.436	12.40	8.742	5.993
20.80	6.828	3.470	12.20	8.813	6.096
20.60	6.858	3.504	12.00	8.887	6.202
20.40	6.889	3.539	11.80	8.962	6.311
20.20	6.920	3.575	11.60	9.040	6.423
20.00	6.952	3.612	11.40	9.120	6.542
19.80	6.984	3.649	11.20	9.202	6.664
19.60	7.017	3.688	11.00	9.288	6.790
19.40	7.050	3.727	10.80	9.375	6.922
19.20	7.084	3.766	10.60	9.466	7.058
19.00	7.119	3.807	10.40	9.560	7.200
18.80	7.154	3.848	10.20	9.656	7.348
18.60	7.190	3.891	10.00	9.756	7.501
18.40	7.226	3.934	9.80	9.860	7.661
18.20	7.263	3.978	9.60	9.967	7.826
18.00	7.301	4.024	9.40	10.079	8.003
17.80	7.339	4.070	9.20	10.194	8.183
17.60	7.378	4.117	9.00	10.314	8.376
17.40	7.418	4.166	8.80	10.439	8.575
17.20	7.459	4.216	8.60	10.569	8.784
17.00	7.500	4.266	8.40	10.704	9.004
16.80	7.542	4.318	8.20	10.845	9.234
16.60	7.585	4.372	8.00	10.993	9.477
16.40	7.629	4.426	7.80	11.146	9.733

TABLE II

SCALED DISTANCE AS A FUNCTION OF PRESSURE OR IMPULSE

PRESSURE/ SCALED IMPULSE (PSIG) OR (PSI-MS/LB) ^{1/3}	LAMBDA-P	LAMBDA-I
	(FT/LB) ^{1/3}	(FT/LB) ^{1/3}
7.60	11.308	9.733
7.40	11.476	10.002
7.20	11.654	10.287
7.00	11.840	10.588
6.80	12.036	10.907
6.60	12.242	11.246
6.40	12.460	11.606
6.20	12.691	11.990
6.00	12.936	12.399
5.80	13.196	12.837
5.60	13.472	13.307
5.40	13.767	13.812
5.20	14.083	14.357
5.00	14.422	14.945
4.80	14.787	15.583
4.60	15.181	16.277
4.40	15.607	17.036
4.20	16.071	17.867
4.00	16.578	18.782
3.80	17.134	19.795
3.60	17.747	20.923
3.40	18.428	22.184
3.20	19.187	23.605
3.00	20.041	25.218
2.80	21.009	27.064
2.60	22.116	29.197
2.40	23.395	31.691
2.20	24.893	34.644
2.00	26.671	38.195
1.80	28.819	42.545
1.60	31.469	47.997
1.40	34.822	55.026
1.20	39.209	64.429
1.00	45.199	77.641

APPENDIX E

SAMPLE CALCULATIONS

APPENDIX E
 SAMPLE CALCULATIONS

TEST DATA:

WS 75 LBS WR 0.5 LBS
 RT 20.75 FT P 8.2 PSIG
 ER 1.25 (C4) IT 14.5 PSI-MSEC

::::: PRESSURE EQUIVALENCY :::::

FROM APPENDIX D, TABLE II

FOR P = 8.2 PSIG, Z = 10.845

FROM APPENDIX A

$$R = ER * WR = 1.25 * 0.5 = 0.625$$

$$FP = ((R/Z)^3 - R) / WS = ((20.75/10.845)^3 - 0.625) / 75 = 0.085 = *4.5%*$$

$$ZP = (R / (WS + P/EP))^{1/3} = (20.75 / (75 + 0.625 / 0.085))^{1/3} = *4.77*$$

::::: IMPULSE EQUIVALENCY :::::

FROM APPENDIX C

$$Y = (77.641 (IT/R))^{.49405} = (77.641 (14.5/20.75))^{.49405} = *4.1*$$

$$Z = (70.0864 (R/IT))^{.50595} = (70.0864 (20.75/14.5))^{.50595} = *9.1*$$

FROM APPENDIX B

$$EI = ((IT/Y)^3 - R) / WS = ((14.5/4.1)^3 - 0.625) / 75 = .15 = *15%*$$

$$OR: EI = ((R/Z)^3 - R) / WS = ((20.75/9.1)^3 - 0.625) / 75 = .15 = *15%*$$

$$ZI = R / (WS + R/EI)^{1/3} = 20.75 / (75 + 0.625 / .15)^{1/3} = *4.83*$$

ALTERNATIVELY: $ZI = (Y * R / IT) * (EI)^{1/3} = (4.1 * 20.75 / 14.5) * (.15)^{1/3} = *4.83*$

OR: $ZI = FI * Z = (.15)^{1/3} * 9.1 = *4.83*$

APPENDIX F
FORTRAN EXTENDED COMPUTER PROGRAM

PROGRAM INTIQ TRACE

SYMBOLIC REFERENCE MAP

ENTRY POINTS
4052 INTIQ

VARIABLES	SN	TYPE	RELOCATION
4302 A1		REAL	
4304 A3		REAL	
4306 A5		REAL	
4310 A7		REAL	
4375 BCDREC		REAL	
4374 BSTRG		REAL	
4415 CARD2		REAL	
4371 IMPULEQ		REAL	
4401 P		REAL	
4400 PRESSUR		REAL	
4370 SAMPL13		REAL	
4403 Z1		REAL	
4402 ZINTI		REAL	
4303 A2		REAL	
4305 A4		REAL	
4307 A6		REAL	
4311 AB		REAL	
4373 BOOSTER		REAL	ARRAY
4410 CARD1		REAL	
4377 DISTANC		REAL	
4370 IMPULSE		REAL	
4406 PRESSEO		REAL	
4372 SAMPLE		REAL	
4404 SCALIMP		REAL	
4407 ZP		REAL	
4405 ZTINTP		REAL	

FILE NAMES	MODE	2022	OUTPUT	0	TAPE5	FMT	2022	TAPE6	FMT
0 INPUT									

EXTERNALS	ALDGI0	TYPE	ARGS	EOF	REAL	1
4065 2						
4120 4						
4315 12						
4067 3						
4312 11						
4347 14						

STATEMENT LABELS

4053 1						
4120 4						
4315 12						
4065 2						
4120 4						
4317 13						
4067 3						
4312 11						
4347 14						

STATISTICS

PROGRAM LENGTH	3608	240
BUFFER LENGTH	4048	2084

FE

BLACK POWDER TEST RUN 80 5/6
 THOMAS CAGGIANO CPID TEST RUN 1
 SAMPLE 25.0000 BOOSTER .2500

DISTANCE	PRESSURE	IMPULSE	SCALED IMP	ZTNTI	ZI	SEO (II)	ZTNTP	ZP	SEO (IP)
6.000	30.320	27.250	9.319	10.1	2.0	12.3	5.8	1.0	3.3
8.980	15.300	16.870	5.769	11.7	3.0	10.7	7.9	2.6	4.7
12.790	8.620	11.980	4.097	8.3	4.2	10.7	10.6	4.1	5.9
17.750	5.180	8.740	2.989	6.1	5.9	10.8	14.1	5.7	6.7
22.630	3.610	6.930	2.370	4.8	7.5	10.9	17.7	7.3	7.1
46.710	1.310	3.450	1.180	2.4	15.4	11.1	36.7	15.1	7.0

THOMAS CAGGIANO CPTD TEST RUN 2
 BLACK POWDER TEST RUN 30/31
 SAMPLE 75.0000 BOOSTER 1.5000

DISTANCE	PRESSURE	IMPULSE	SCALED IMP	ZTNTI	ZI	NEQ (I)	ZTNP	ZP	NEQ (PI)
12.000	36.000	51.510	12.214	17.6	2.8	30.7	5.3	2.7	12.6
14.980	24.220	38.710	9.179	13.7	3.5	27.4	6.4	3.4	14.8
18.790	16.150	29.690	7.040	10.8	4.3	25.5	7.7	4.3	17.0
23.750	10.630	23.060	5.468	8.5	5.5	24.5	9.5	5.4	18.6
28.630	7.610	19.150	4.541	7.0	6.6	24.3	11.3	6.5	19.2
52.710	2.560	11.430	2.710	4.0	12.1	27.8	22.4	11.9	15.0