

UNCLASSIFIED

AD NUMBER
AD817122
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; JUL 1967. Other requests shall be referred to U.S. Army Corps of Engineers, Waterways Experimental Station, Vicksburg, MS.
AUTHORITY
USAEWES ltr, 27 Jul 1971

THIS PAGE IS UNCLASSIFIED

AD817122

TECHNICAL REPORT NO. 3-666

# PERFORMANCE OF SOILS UNDER TIRE LOADS

Report 5

## DEVELOPMENT AND EVALUATION OF MOBILITY NUMBERS FOR COARSE-GRAINED SOILS

by

A. J. Green



July 1967

Sponsored by

**U. S. Army Materiel Command**

Conducted by

**U. S. Army Engineer Waterways Experiment Station  
CORPS OF ENGINEERS**

**Vicksburg, Mississippi**

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of U. S. Army Engineer Waterways Experiment Station.

Destroy this report when no longer needed. Do not return  
it to the originator.

The findings in this report are not to be construed as an official  
Department of the Army position unless so designated  
by other authorized documents.

**Best  
Available  
Copy**

TECHNICAL REPORT NO. 3-666

# PERFORMANCE OF SOILS UNDER TIRE LOADS

Report 5

## DEVELOPMENT AND EVALUATION OF MOBILITY NUMBERS FOR COARSE-GRAINED SOILS

by

A. J. Green



July 1967

Sponsored by

U. S. Army Materiel Command  
Project No. 1-V-0-21701-A-046  
Task 05

Conducted by

U. S. Army Engineer Waterways Experiment Station  
CORPS OF ENGINEERS  
Vicksburg, Mississippi

ARMY-MRC VICKSBURG, MISS.

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of U. S. Army Engineer Waterways Experiment Station.

## FOREWORD

These tests were conducted at the U. S. Army Engineer Waterways Experiment Station (WES) as a part of the vehicle mobility research program under DA Project 1-V-O-21701-A-046, "Trafficability and Mobility Research," Task 1-V-O-21701-A-046-03, "Mobility Fundamentals and Model Studies," under the sponsorship and guidance of the Directorate of Research and Development, U. S. Army Materiel Command.

The tests were performed by personnel of the Mobility Research Branch, Mobility and Environmental Division, WES, during the period November 1963 to March 1965 under the general supervision of Messrs. W. G. Shockley and S. J. Knight, and under the direct supervision of Dr. D. R. Freitag. Actively engaged in the study were Messrs. A. J. Green, J. C. Chang, N. R. Murphy, Jr., M. D. Beasley, and H. B. Boyd. The data were analyzed by Messrs. Green and Murphy. This report was prepared by Mr. Green.

COL Alex G. Sutton, Jr., CE, and COL John R. Oswalt, Jr., CE, were Directors of WES during this study and preparation of this report. Mr. J. B. Tiffany was Technical Director.

## CONTENTS

	<u>Page</u>
FOREWORD . . . . .	iii
CONVERSION FACTORS, METRIC TO BRITISH UNITS OF MEASUREMENT . . . . .	vii
SUMMARY . . . . .	ix
PART I: INTRODUCTION. . . . .	1
Background . . . . .	1
Purpose of This Study. . . . .	1
Scope. . . . .	1
Special Definitions. . . . .	2
PART II: SOIL PREPARATION AND TEST EQUIPMENT. . . . .	4
Soil Preparation . . . . .	4
Test Equipment . . . . .	6
PART III: DIMENSIONAL FRAMEWORK . . . . .	10
Independent Parameters . . . . .	10
Dependent Parameters . . . . .	11
Pi Terms (General Functional Equations). . . . .	11
General Functional Equations . . . . .	12
Simplification of Functional Equations . . . . .	13
Pi Terms (Simplified Functional Equations) . . . . .	16
PART IV: TEST RESULTS . . . . .	18
Analysis . . . . .	18
Evaluation of the Sand Mobility Number . . . . .	24
Performance Prediction . . . . .	28
PART V: CONCLUSIONS AND RECOMMENDATIONS . . . . .	36
Conclusions . . . . .	36
Recommendations. . . . .	36
LITERATURE CITED . . . . .	38
TABLES 1-12	
PLATES 1-26	

CONVERSION FACTORS, METRIC TO BRITISH UNITS OF MEASUREMENT

Metric units of measurement used in this report can be converted to British units as follows:

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
meters	3.2808	feet
centimeters	0.3937	inches
millimeters	0.03937	inches
kilonewtons	225.0	tons
newtons	0.2250	pounds
newtons per square centimeter	1.4503	pounds per square inch
grams per cubic centimeter	62.4300	pounds per cubic foot
kilograms	2.2045	pounds
meter-newtons	3.7382	foot-pounds



## SUMMARY

This study examined the effects of tire deflection, tire geometry, wheel load, and soil strength on the performance of coarse-grained soils subjected to moving tire loads. Mathematical expressions were developed that combine the independent tire-soil and system parameters and relate them to the performance coefficients.

A combination of independent parameters,  $\frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h}$ , was developed from single-wheel laboratory tests. This expression, referred to as the sand mobility number, is shown to account for the combined effects of soil strength ( $G$ ), tire section width and diameter ( $b$  and  $d$ , respectively), wheel load ( $W$ ), and tire deflection ( $\delta/h$ ) on wheel performance as measured by the performance coefficients.

A multiple-pass analysis was conducted to illustrate that performance on the second and third passes also could be related to the sand mobility number, although the relation was not the same as that for the first pass. It was shown in a similar fashion that the performance of vehicles on coarse-grained soils could be predicted using a relation based on the sand mobility number.

PERFORMANCE OF SOILS UNDER TIRE LOADS  
DEVELOPMENT AND EVALUATION OF MOBILITY  
NUMBERS FOR COARSE-GRAINED SOILS

PART I: INTRODUCTION

Background

1. The mission of the Mobility and Environmental Division of the U. S. Army Engineer Waterways Experiment Station (WES) is to conduct research that will lead to an improvement in the overall mobility of ground-contact military vehicles. Before marked improvement in mobility can be effected, an understanding of the fundamental relations of terrain-vehicle systems must be developed. One phase of the research is the development of mathematical expressions that (a) include all pertinent independent tire and soil parameters and (b) can be used to predict the performance of soils under moving tire loads.

2. The details of the test program "Performance of Soils Under Tire Loads" and the essential test equipment and techniques thereof are described in Report 1 of this series, and subsequent reports in the series contain first-order analysis of various portions of the test data.<sup>1</sup> Basic data from previous tests of this program and data from other WES field test programs<sup>2</sup> are the principal sources of the data presented herein.

Purpose of This Study

3. The purpose of this study was to develop relations between the performance coefficients and independent tire-soil and system parameters that would (a) be useful to the designer in selection of the number and size of tires required to achieve a desired degree of mobility and (b) permit prediction of the soft-soil performance of pneumatic-tired vehicles.

Scope

4. This study was limited to tests with single wheels and a

four-wheel-drive test vehicle on one air-dry sand in the laboratory, and a review of selected data from tests with nine different pneumatic-tired vehicles on dry-to-moist undisturbed beach and dune sands. Each single-wheel test usually consisted of a series of five consecutive passes of a test tire in the same path. During these laboratory tests, soil strength, wheel load, tire geometry, and tire deflection were varied. The tires selected for the tests, designated basic test tires in this report, provided a systematic variation in tire diameter and section width, and permitted an evaluation of (a) model-prototype relations and (b) the effects of tire width and diameter on performance. Tire loads and inflation pressures were varied to produce hard-surface deflections of 15, 25, and 35 percent. During the tests with the basic test tires, sand consistency varied from 0.7 to 8.3 N/cm<sup>2</sup>/cm\* penetration resistance gradient (density approximately 1.44 to 1.65 g/cm<sup>3</sup>; 0- to 15-cm cone index approximately 7 to 90 psi). In the field data selected for this analysis, tire load, tire geometry, tire deflection, and soil strength were variable quantities.

#### Special Definitions

5. Certain terms that facilitate analysis of data and communication of test results are rigorously defined in Report 1 of this series. Only those additional terms that are considered essential to this report are defined below.

Depth of influence: The depth range (e.g. 0 to 15 cm) for which changes in density of the soil noticeably affect the performance of pneumatic tires. In this text, the depth of influence is assumed to be equal to the section width of the tire.

Dynamic load transfer: The transfer of load from one axle to another resulting from differential rutting, slope of surface, or application of torque to the wheels.

Dynamic radius ( $r_e$ ): The undeflected radius minus the dynamic in-soil deflection measured directly beneath the axle.

---

\* A table of factors for converting metric units of measurement to British units is presented on page vii.

Internal rolling resistance: The force required to tow a given vehicle in neutral gear on an unyielding surface.

Penetration-resistance gradient (G): The slope of the curve of penetration resistance versus depth averaged, in this analysis, for a depth equal to the width of the tire.

Spissitude ( $\beta$ ): Change in a soil's resistance to penetration as a result of the rate of deformation. The meaning of this word is somewhat similar to that of viscosity, but it is utilized to avoid misuse of the rather specific technical meaning of viscosity.

Towing force (maximum drawbar pull): The maximum sustained towing force a self-propelled vehicle can produce at its drawbar under given test conditions. (Note: Towing force-load ratio approximates maximum slope negotiable.)

PART II: SOIL PREPARATION AND TEST EQUIPMENT

Soil Preparation

6. The sand used in the laboratory tests was taken from an active dune near Yuma, Arizona. Fig. 1 shows the gradation and classification of

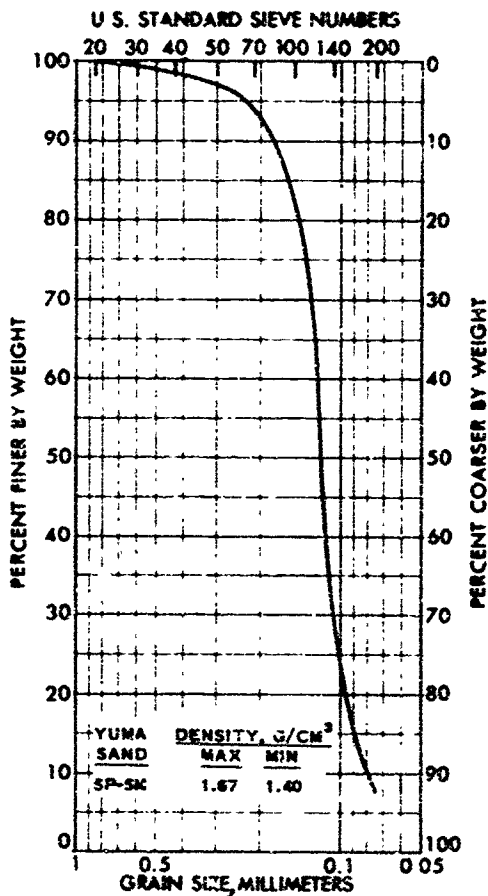


Fig. 1. Gradation and classification of Yuma sand

this soil, which was classified as SP-SM in accordance with the Unified Soil Classification System. The field tests were conducted on undisturbed sands in the desert near Yuma, Arizona, and on various beaches in the United States and abroad.

Laboratory tests

7. In the laboratory tests the sand was placed in the soil bins shown in fig. 2. Five bins were joined end to end to provide a test course long enough for the test carriage to be accelerated to the desired speed, a programmed-slip test to be conducted, and the carriage to be decelerated. The actual test lane was two bins, or 16.5 m, long. The soil in these two bins was harrowed to a depth of 43 cm, and the surface was compacted with a pneumatic-tired roller and leveled before each test. The objective of the soil processing was to prepare

uniform test sections in which the increase in strength with depth was approximately linear to a depth at least as great as the width of the test tire. This objective was achieved generally, but there were exceptions. Typical profiles, representing two different strength levels, are shown in fig. 3.

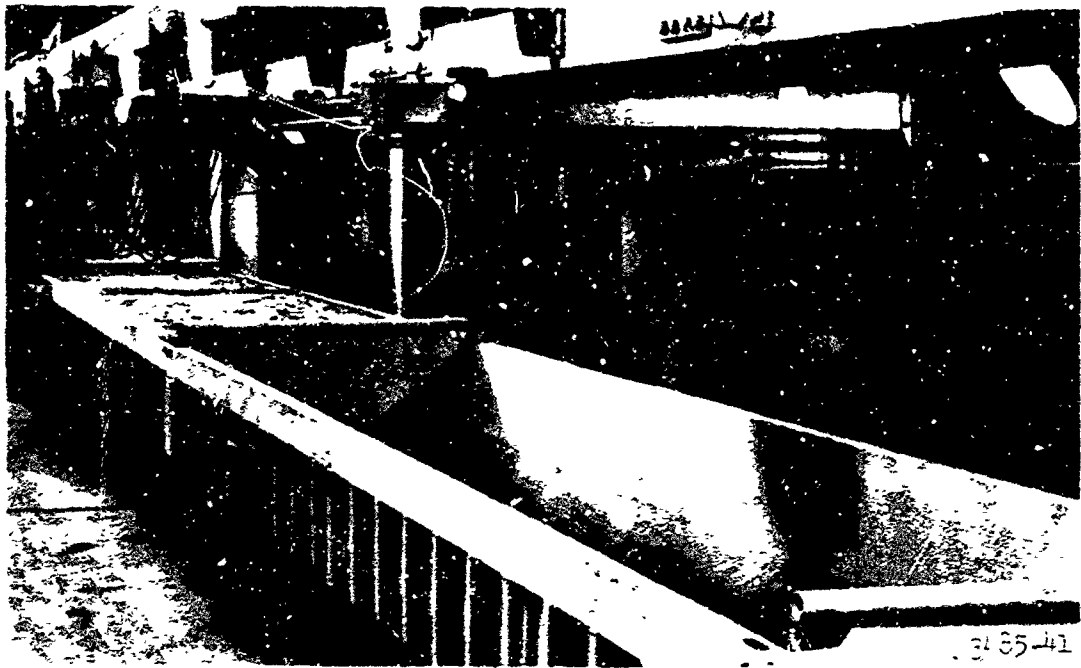


Fig. 2. Soil bins

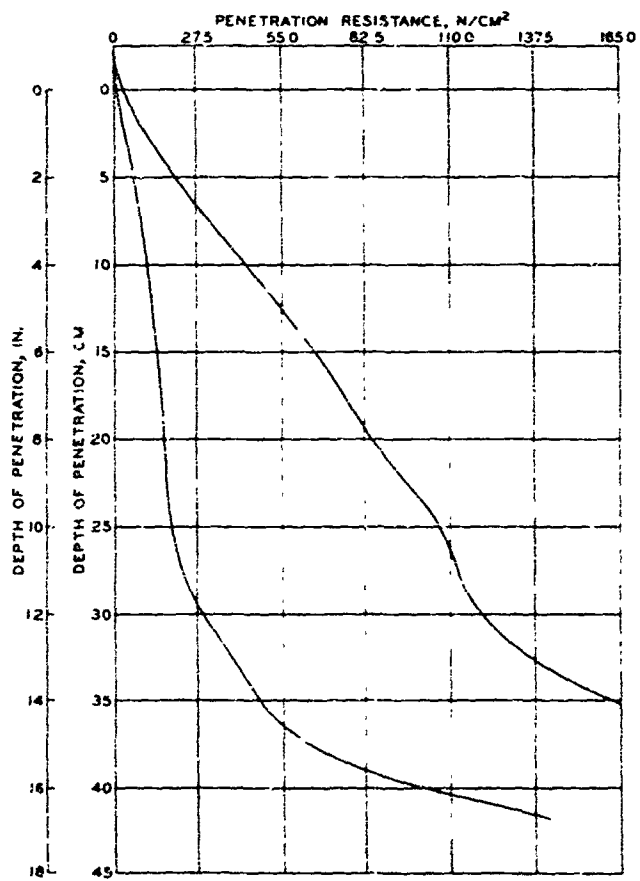


Fig. 3. Typical profiles of Yuma sand

Field tests

8. Surface slope and soil strength were measured on the unprepared (natural) test areas, otherwise the areas were not disturbed prior to tests.

Test Equipment

Test tires

9. Basic test tires. For the test program, a basic set of test tires was selected to provide a systematic variation in the principal tire dimensions--diameter and section width. These tires are shown in fig. 4,

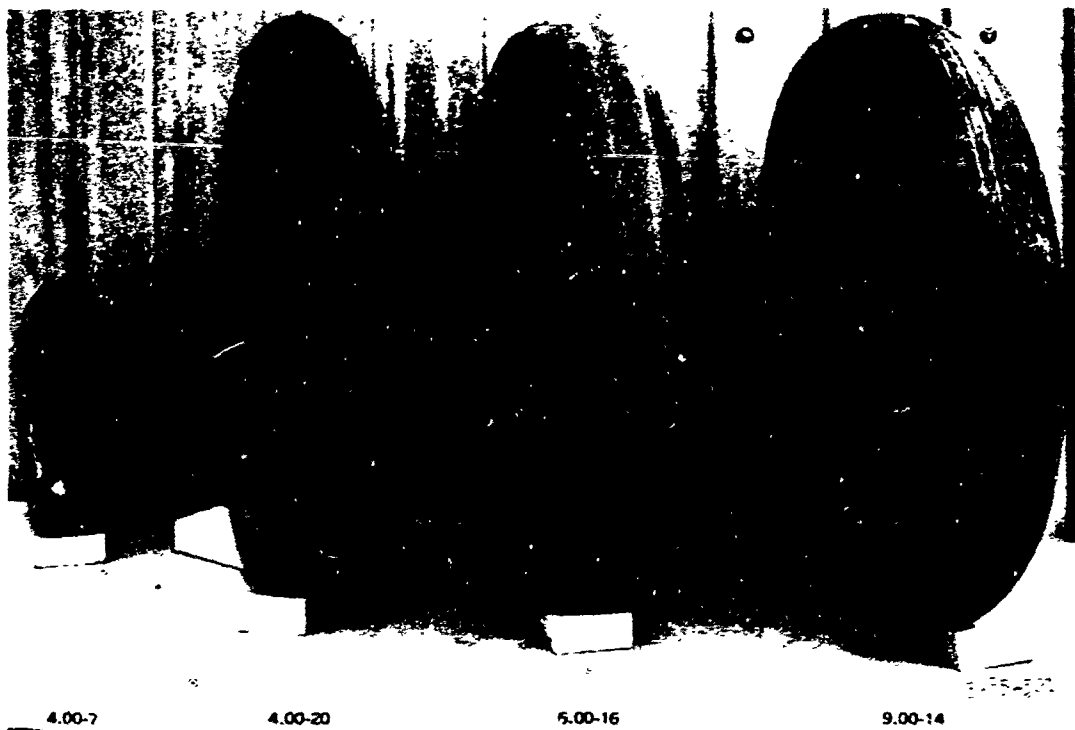


Fig. 4. Basic test tires

and their dimensions are as follows.

<u>Nominal Size</u>	<u>Diameter cm</u>	<u>Section Width, cm</u>	<u>Section Height, cm</u>
4.00-7	35.8	10.7	7.9
4.00-20	71.2	10.7	8.1
6.00-16	72.2	16.8	13.5
9.00-14	72.2	21.1	16.3

The dimensions listed are average values, as the actual size varied slightly with inflation pressure (table 1). The exterior dimensions of the 9.00-14 tire are approximately twice those of the 4.00-7. The diameter of the 4.00-20 tire is almost the same as that of the 9.00-14, but is twice that of the 4.00-7. The section width of the 4.00-20 tire is about half that of the 9.00-14 tire and the same as that of the 4.00-7 tire. The diameter of the 6.00-16 tire is the same as that of the 9.00-14 and approximately the same as that of the 4.00-20, but the section width is of intermediate dimension.

10. These tires were of flexible, two-ply construction with nearly circular cross sections and were buffed free of tread. They were mounted on steel rims with standard flanges and tested without tubes. Detailed tire data are listed in table 1.

11. Validation test tires. Four tires, of dimensions different from those of the basic test tires, were used to validate the performance relations developed from tests with the basic test tires. The validation test tires were selected because they represented a wider range of sizes and shapes than did the basic tires. Furthermore, in some of the tests conducted with these tires, the penetration resistance-depth curves were different from those associated with tests of the basic tires in that the strength usually increased uniformly with depth to a depth of only 15 cm. At greater depth, the rate of increase varied, but was generally less than that of the first 15 cm. The validation test tires are shown in fig. 5, and their dimensions are as follows.

<u>Nominal Size</u>	<u>Diameter cm</u>	<u>Section Width cm</u>	<u>Section Height cm</u>
16x15-6R (Terra tire)	43.2	38.6	13.2
11.00-20	104.8	29.0	22.8
1.75-26 (bicycle tire)	71.6	4.3	3.6
9.00-14	69.1	21.8	14.7

The 11.00-20, 12-PR standard military tire has essentially conventional proportions, and was tested with a tube.\*

\* This tire was tested on a large, single-wheel dynamometer carriage considered to be mechanically equivalent to the one described in paragraph 12.





Fig. 5. Validation test tires

The 1.75-26 tire is a common commercial bicycle tire and also requires a tube. Its diameter is about 16 times its width. The 16x15-6R Terra tire is tubeless and its width almost equals its diameter. The 9.00-14, 2-PR tire was of the same general size and shape as the basic test tire of the same size. Validation test tire data are given in detail in table 2.

#### Test carriage

12. The single-wheel dynamometer test carriage (fig. 6) is instrumented to provide a continuous record of pull, torque, wheel sinkage, wheel load, velocity, and slip. A detailed description of the carriage is given in Report 1 of this series.

#### Test vehicles

13. The vehicle performance data selected include data from tests with conventional pneumatic-tired vehicles used in the field and a modified four-wheel-drive vehicle used in the laboratory. Pertinent vehicle and tire data for the field tests have been extracted from Supplement 17 of Technical Memorandum No. 3-240.<sup>2</sup> Tire dimensions of the field test vehicles are as follows:

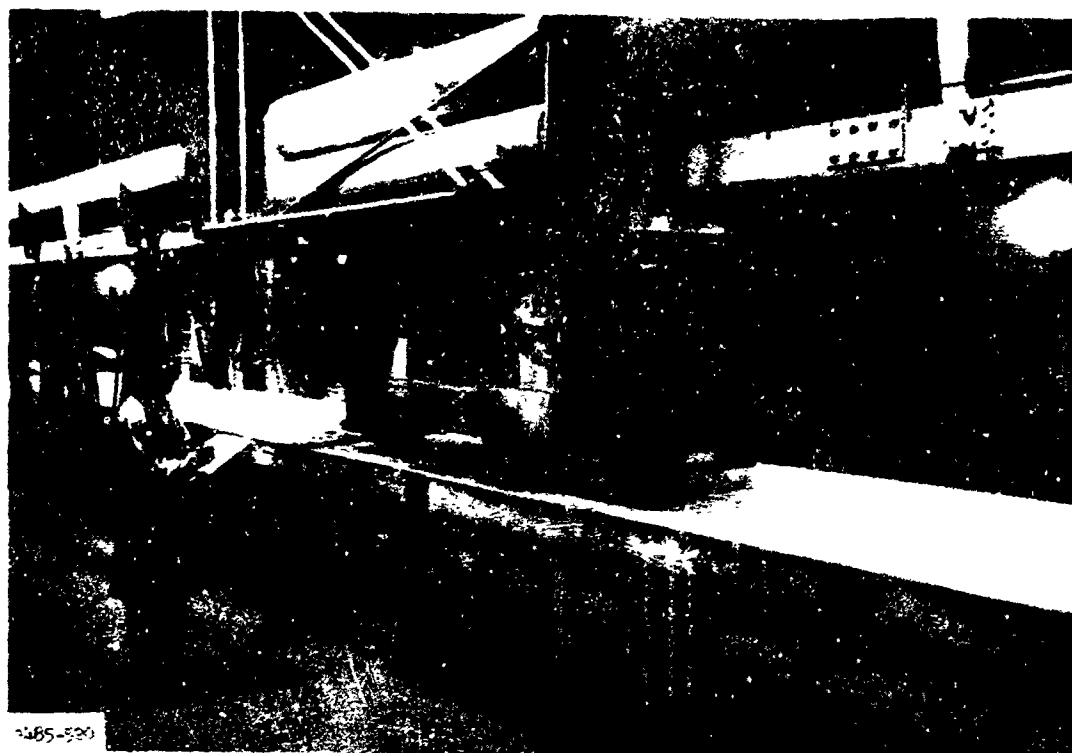


Fig. 6. Test carriage in position on soil cars

Vehicle	Nominal Tire Size	Diam, d cm	Section Width, b cm	Section Height, h cm
M38A1, 4x4 Jeep, 1/4-ton*	7.00-16	76.2	18.42	15.88
M37, 4x4 truck, 3/4-ton	9.00-16	86.4	23.37	21.21
M34 and M135, 6x6 truck, 2-1/2-ton	11.00-20	104.9	28.70	24.13
M11, 6x6 truck*, 5-ton	14.00-20	124.5	36.83	30.48
DUKW 353, 6x6 truck, 2-1/2-ton (Amphibian)	14.00-20	124.5	36.83	30.48
Bucket loader, 4x4 tractor	14.00-24	134.6	36.07	30.48
Tornadozer, 4x4 tractor	21.00-25	166.4	55.63	45.72
XM520 GOER, 4x4 cargo carrier, 5-ton	18.00-26	160.0	46.99	40.13
XM520 GOER, 4x4 cargo carrier, 5-ton	15.00-34	165.6	45.97	36.83

\* Multiply by 0.907185 to get metric tons.

PART III: DIMENSIONAL FRAMEWORK

14. In a brief analysis of the bearing capacity of soft soils under tracked vehicles, Markwick<sup>3</sup> introduced dimensional analysis as a means of studying soil-vehicle systems. Other experimenters have used similar techniques as an aid to vehicle mobility research. Their work is described in references 4-15. Several of the references contain a development of the Pi terms related to the soil-vehicle system. Therefore, this report only contains tabulations of the pertinent tire-soil parameters and the Pi terms used to develop functional equations.

Independent Parameters

15. The independent parameters of a soil-vehicle system were divided into three groups: soil parameters, tire parameters, and system parameters.

<u>Parameter</u>	<u>Symbol</u>	<u>Mass, Length, Time (MLT) Units</u>
Soil:		
Friction angle	$\phi$	--
Cohesion	c	$ML^{-1}T^{-2}$
Density	$\gamma$	$ML^{-2}T^{-2}$
Spissitude	$\beta$	$ML^{-1}T^{-1}$
Tire:		
Diameter	d	L
Section width	b	L
Section height	h	L
Deflection	s	L
System:		
Load	W	$MLT^{-2}$

(Continued)

<u>Parameter</u>	<u>Symbol</u>	<u>Mass, Length, Time (MLT) Units</u>
System (Cont'd):		
Translational velocity	V	$LT^{-1}$
Slip	S	--
Tire-soil friction	f	--
Acceleration of gravity	g	$LT^{-2}$

Dependent Parameters

16. The dependent parameters of the system in this study were the major performance characteristics:

<u>Parameter</u>	<u>Symbol</u>	<u>MLT Units</u>
Pull	P	$MLT^{-2}$
Towed force	$P_T$	$MLT^{-2}$
Torque	Q	$ML^2T^{-2}$
Sinkage	z	L

Pi Terms (General Functional Equations)

17. The independent and dependent parameters listed in paragraphs 15 and 16 were combined, using the diameter d as a characteristic tire dimension, to generate the following Pi terms:

<u>Term</u>	<u>Descriptive Title</u>
$\frac{P}{W}$	Pull coefficient
$\frac{z}{d}$	Sinkage coefficient
$\frac{Q}{dW}$	Torque coefficient
$\frac{P_T}{W}$	Towed coefficient

(Continued)

<u>Term</u>	<u>Descriptive Title</u>
$\frac{cd^2}{W}$	Clay loading number
$\frac{\gamma d^3}{W}$	Sand loading number
$\frac{b}{d}$	Shape number
$\frac{\delta}{h}$	Deflection number
$\frac{h}{r}$	Height-diameter ratio
$\frac{v^2}{gd}$	Froude number
$\frac{W}{\rho d^3 v}$	Velocity number
$\phi$	Angle of internal friction
$s$	Wheel slip
$f$	Tire-soil friction

General Functional Equations

18. The Pi terms enumerated in the preceding paragraph can be combined to produce the following general equations, which are similar in form to those presented by other authors.<sup>8,15</sup>

For the pull coefficient:

$$\frac{P}{W} = f' \left( \frac{\delta}{h}, \frac{b}{d}, \frac{h}{d}, \phi, \frac{cd^2}{W}, \frac{\gamma d^3}{W}, \frac{v^2}{gd}, \frac{W}{\rho d^3 v}, s, f \right)$$

For the sinkage coefficient:

$$\frac{z}{d} = f'' \left( \frac{\delta}{h}, \frac{b}{d}, \frac{h}{d}, \phi, \frac{cd^2}{W}, \frac{\gamma d^3}{W}, \frac{v^2}{gd}, \frac{W}{\rho d^3 v}, s, f \right)$$

For the torque coefficient:

$$\frac{Q}{dW} = f''' \left( \frac{\delta}{h}, \frac{b}{d}, \frac{h}{d}, \phi, \frac{cd^2}{W}, \frac{\gamma d^3}{W}, \frac{v^2}{gd}, \frac{W}{\rho d^3 v}, s, f \right)$$

For the towed coefficient:

$$\frac{P_T}{W} = f'''' \left( \frac{\delta}{h}, \frac{b}{d}, \frac{h}{a}, \phi, \frac{cd^2}{W}, \frac{\gamma d^3}{W}, \frac{V^2}{gd}, \frac{W}{\beta dV}, s, f \right)$$

#### Simplification of Functional Equations

19. By control of the test conditions and the use of certain substitutions in the basic Pi terms, the preceding equations can be simplified to manageable proportions, and the more important relations between the variables of the tire-soil system can be evaluated systematically.

##### Soil parameters

20. A soil that is almost purely frictional was selected; thereby the clay loading number  $\frac{cd^2}{W}$  was eliminated. Penetration-resistance studies conducted prior to this test program indicated that the effect of velocity on the penetration resistance of this air-dry sand was negligible; therefore, the velocity number  $\frac{W}{\beta dV}$  was omitted in the simplified analysis.

21. Several experimenters have shown that the friction angle  $\phi$  of a cohesionless, dry sand is proportional to the density  $\gamma$ .<sup>16,17</sup> Therefore,  $\phi$  was not included as a separate parameter. It has been determined also that the penetration-resistance gradient  $G$  is related to the density of a frictional soil. Since the penetration resistance is a very sensitive indicator of density change and since in-situ density measurements are difficult to obtain in loose air-dry sand, the penetration-resistance gradient  $G$  was substituted for  $\gamma$ . Both terms are expressed in similar units,  $ML^{-2}T^{-2}$ . It should be noted that in dry, cohesionless sand, the penetration resistance at the surface will be small and will not greatly affect the value of the gradient.

##### Tire parameters

22. Four tire geometry parameters--  $b$ ,  $d$ ,  $\delta$ , and  $h$  --were considered in this analysis. The three Pi terms chosen to represent these parameters were  $\frac{b}{d}$ ,  $\frac{h}{a}$ , and  $\frac{\delta}{h}$ . The basic test tires are roughly toroidal in shape; hence, the ratio of section height to section width is very

nearly constant for the group. This permitted the number of Pi terms to be reduced to two,  $\frac{b}{d}$  and  $\frac{s}{h}$ . The tire diameter  $d$  was chosen as the characteristic tire dimension in the first phases of the analysis. Later, detailed examination of the data allowed the other tire dimensions to be incorporated in the loading numeric.

#### System parameters

23. The four performance coefficients, the tire-to-soil friction coefficient, the Froude number, and the slip value are considered system parameters. Since it was not considered practical to study the effect of slip as an independent variable, the pull, torque, and sinkage coefficients were evaluated at a constant slip value. The slip value chosen was 20 percent. There are several reasons for this choice. The maximum pull developed during laboratory tests generally occurred near 20 percent slip. Also, it was observed that soil-to-soil failures, as evidenced by the formation of visible shear planes (fig. 7), occurred during the tests

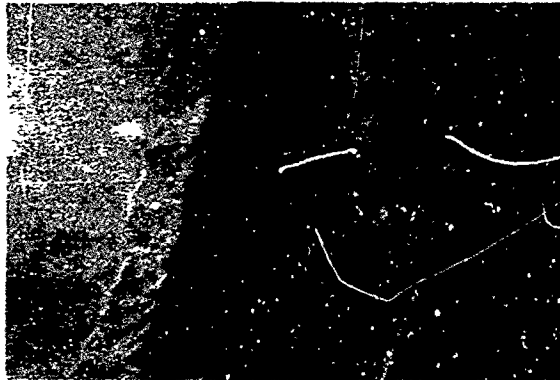


Fig. 7. Shear displacements in tire path

as the slip value approached 20 percent; similar observations were made during the field tests. The fact that soil-to-soil failures were observed justifies the deletion of the tire-soil friction term  $f$ . The effect of speed on performance was assumed to be negligible; therefore, the Froude number  $\frac{v^2}{gd}$  was deleted from the general functional equations.

24. The range of slip values associated with the towed coefficient was quite large, but the slip in this case can be considered a dependent variable and was not included in the simplified functional equation for the towed coefficient.

#### Refinements

25. Torque coefficient. The torque coefficient  $\frac{Q}{dW}$  can be made more explicit by replacing the diameter  $d$  with the dynamic radius  $r_e$  to obtain the form  $\frac{Q}{r_e W}$ . Since the dynamic radius more closely

approximates the moment arm of the soil forces that provide the resistance to the applied torque  $Q$ , the magnitude of the torque coefficient in this form is more nearly equal to the sum of the pull and towed coefficients. (If the tire is on a plane surface that is parallel to the travel direction, and if the towed force  $P_T$  is equal to the motion resistance at 20 percent slip, then  $\frac{Q}{r_e W} = \frac{P_{20}}{W} + \frac{P_T}{W}$  .)

26. Tire deflection (laboratory data). In these tests, the wheel was loaded pneumatically,<sup>1</sup> and the applied load was continuously recorded. In some instances, the pneumatic loading system was unable to provide a constant load during a specific test. Since the inflation pressure remained relatively constant, the deflection of the tire was affected by these changes in load. This suggested that the data used in the dimensionless numbers should be those corresponding to the conditions actually imposed on the wheel at the time the performance was measured. To effect the needed adjustments, a series of plots similar to the one shown in fig. 8 were utilized. For example, if the planned load  $W$  and deflection number  $\frac{\delta}{h}$  were 1000 N and 15 percent, but the load dropped to 955 N during the test, the corresponding deflection would be 14.5 percent (fig. 8). The values of the sand loading number  $\frac{Gd^3}{W}$ , the sand number

$\frac{G(bd)^{3/2}}{W}$ , and the sand mobility number  $\frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h}$  sub-

sequently discussed in this report all employ the load actually measured at the data station and the hard-surface deflection that corresponds to that load and inflation pressure. This adjustment reduced scatter in plots of performance data so that relations between the independent and dependent

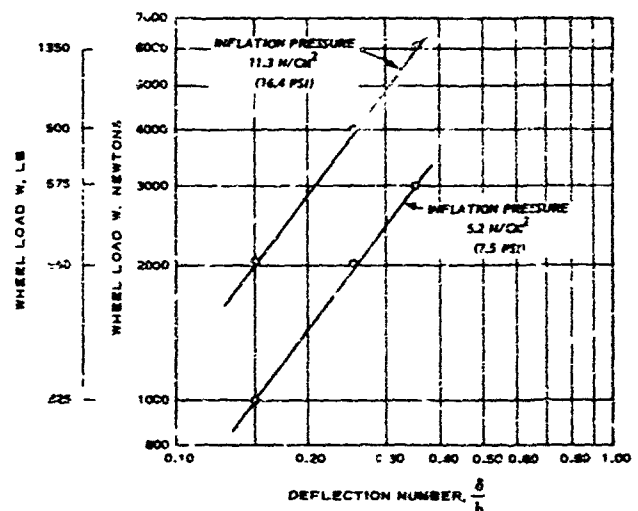


Fig. 8. Deflection number versus wheel load



parameters could be delineated with greater assurance.

27. Tire deflection (field data). Because of the conditions prevailing in the field, deflection data were not obtained for every combination of load and inflation pressure tested. Therefore, it was necessary to estimate the test tire deflection from a plot such as that shown in fig. 8 using the load and inflation pressure recorded for each test.

Pi Terms (Simplified Functional Equations)

28. From consideration of the restrictions and simplifications discussed in the preceding paragraphs, Pi terms used in the analysis are as follows:

<u>Term</u>	<u>Descriptive Title</u>
$\frac{P}{W}$	Pull coefficient
$\frac{z}{d}$	Sinkage coefficient
$\frac{Q}{r_e W}$	Torque coefficient
$\frac{P_T}{W}$	Towed coefficient
$\frac{Gd^3}{W}$	Sand loading number
$\frac{b}{d}$	Shape number
$\frac{\delta}{h}$	Deflection number

29. The simplified functional equations become:

$$\frac{P}{W} = f' \left( \frac{Gd^3}{W}, \frac{b}{d}, \frac{\delta}{h} \right)$$

$$\frac{z}{d} = f'' \left( \frac{Gd^3}{W}, \frac{b}{d}, \frac{\delta}{h} \right)$$

$$\frac{Q}{rW} = f''' \left( \frac{Gd^3}{W}, \frac{b}{d}, \frac{\delta}{h} \right)$$

$$\frac{P_T}{W} = f'''' \left( \frac{Gd^3}{W}, \frac{b}{d}, \frac{\delta}{h} \right)$$

## PART IV: TEST RESULTS

### Analysis

30. The purpose of this analysis was to determine systematically the effect that changes in soil strength, wheel load, and tire geometry, including deflection, have on performance.

#### Effect of soil strength

31. The simplified functional equations contain only one term,  $\frac{Cd^3}{W}$ , that includes soil strength. As stated in paragraph 7, the test sections were constructed so that the slope of the penetration resistance versus depth relation was relatively constant. However, for the evaluation of the laboratory and field tests with abnormal profiles, it was necessary to devise a method to account for the effect of the deviations from a linear strength-depth relation. Existing soil mechanics theories indicate that the depth range for which changes in density or soil strength affect the bearing capacity of sand is proportional to the width of the footing-- in this case, the tire. On the other hand, the resistance to the torque of a powered wheel is developed by displacements perpendicular to the width direction. Thus, the theories provide only general guidance. Examination of some of the early test data suggested that the results of tests on markedly dissimilar strength-depth profiles could be grouped by simply averaging the penetration-resistance data for a depth range equal to the width of the tire.

32. As a check, tests were conducted in specially prepared test sections in which abrupt changes in soil strength occurred at various depths. Plate 1 shows penetration-resistance curves for a series of such test sections. The rate of increase in strength with depth in both the upper and lower soil layers was nearly constant for this series of tests. Performance data for an 11.00-20 tire in these test sections are tabulated on the following page.

33. These data indicate that changes in the strength of the soil below a depth of approximately 24 cm, which equals 0.83b in this case, did not noticeably affect the level of performance (plate 2). It is recognized

Test No.	Deflection %	Depth to Discontinuity, cm	Wheel Sinkage cm	Torque m-N	Pull N	Wheel Load, N	Pull Coefficient F/W
79	15	9.50	3.66	2463	2088	13,622	0.153
83	15	16.00	4.80	2293	1155	13,524	0.085
85	15	17.80	6.58	2399	911	13,622	0.067
87	15	20.60	6.98	2541	822	13,755	0.060
89	15	23.60	8.48	2660	711	13,724	0.052
91	15	27.20	8.84	2788	720	13,710	0.052
81	15	29.85	8.38	2717	711	13,773	0.052
93	15	34.30	9.07	2893	729	13,555	0.054
80	35	9.50	2.34	3247	5644	14,502	0.389
84	35	16.00	2.41	2908	4489	13,755	0.327
86	35	17.80	2.69	2755	4000	13,853	0.289
88	35	20.60	2.64	2788	3733	13,856	0.269
90	35	23.60	3.17	2752	3544	13,778	0.264
92	35	27.20	3.48	2752	3555	13,600	0.262
82	35	29.85	3.63	2766	3422	13,355	0.256
94	35	34.30	3.91	2823	3511	13,600	0.258

that the depth of influence also will be affected by the relative soil strength of the layers. Since the slopes of the penetration-resistance curves in the upper layer for the specially prepared test sections (plate 1) were approximately equal to the median slope for the tests conducted with the basic test tires, it was assumed that the proposed procedure would yield a reasonable median for the basic tests. The test data also suggest that tire deflection was not a major influence on the depth over which the soil strength affects test results. For analysis of subsequent tests, then, the penetration-resistance gradient  $G$  was averaged for a depth range equal to the tire width.

34. The reliability of  $G$  as a measure of the relative consistency of the soil is demonstrated by data obtained from tests in which tire geometry remained constant. Plates 3, 4, and 5 contain plots of the

dependent performance coefficients  $\frac{P}{W}$ ,  $\frac{z}{d}$ ,  $\frac{Q}{r_e W}$ , and  $\frac{P_T}{W}$  versus the sand loading number  $\frac{Gd^3}{W}$ . These data were obtained from a series of tests with the 9.00-14, 2-PR tire operating at deflections of 15, 25, and 35 percent. The maximum planned wheel load was 3950 N and the minimum, 1000 N. The soil gradient  $G$  ranged from 0.7 to 6.6 N/cm<sup>2</sup>/cm. Some data scatter is evident, but there is no tendency for the data to separate by load. On each plot, a single smooth curve was used to delineate the relation between the independent variables and the sand loading number  $\frac{Gd^3}{W}$ . It was concluded from these data that the soil parameter  $G$  was a satisfactory indication of the relative strength or density of this soil.

35. The curves that describe the relations of pull, sinkage, and towed coefficient to the sand loading number are generally hyperbolic in shape. The largest values of the pull coefficient are associated with the largest values of the sand loading number. Conversely, the largest values of sinkage and towed coefficients are associated with relatively small values of the sand loading number. The torque coefficient increases slightly as the sand loading number increases.

#### Effect of load

36. In the preceding paragraphs, the effect of load variations on performance was not discussed. The effect of changes in load can be examined by comparing groups of tests using a single tire size at a constant deflection number. Plate 6a presents data obtained from tests with a 9.00-14, 2-PR tire at 15 percent deflection and is a plot of the pull coefficient versus the soil strength parameter  $G$ . A separate curve is required to represent the test data for each load. When the same pull coefficient data are plotted versus  $G/W$  (plate 6b), a single curve can be used to represent all loads ( $d$  is constant). This indicates that the effect of load was adequately considered in the sand loading number.

#### Effect of tire geometry

37. Evaluation of model-prototype relations. Results of tests conducted with the 4.00-7 (model) and the 9.00-14 (prototype) tires were used to determine whether the tire performance data followed a true model-prototype relation. The pull, sinkage, towed, and torque coefficients were used to compare the similarity in the geometry of the two systems. Plate 7

contains the data for tests conducted at 35 percent deflection. Tests at 15 and 25 percent deflection showed similar results. The data are intermingled on each plot, indicating geometric and dynamic similarity between model and prototype. This comparison also corroborates the assumption that velocity effects were negligible for the speed range represented since both size tires were operated at the same forward (linear) velocity during these tests, rather than at scaled velocities. In addition, these data also support the use of the soil strength parameter  $G$ . The slopes of the penetration-resistance curves were averaged over a depth approximately equal to the width of the test tire used. Since the slopes of the penetration-resistance curves were not constant in each case, the intermingling of test data seems to indicate that the effect of the soil properties was adequately reflected in the soil strength parameter.

38. Effect of tire width. To determine the effect of tire width on performance, tests were conducted with three tires of nearly equal diameter but of different widths. These were the 9.00-14, 6.00-16, and 4.00-20 tires; their shape numbers ( $b/d$ ) were 0.291, 0.233, and 0.150, respectively. The first step in analyzing the effect of width was to determine the relation of the four performance coefficients to the sand loading number. Data for tests conducted at 15, 25, and 35 percent deflection are given in tables 3 and 4. Similar relations were found at all three deflections. Results of tests at 35 percent deflection shown in plate 8 are typical. Families of curves delineate the relations of the four performance coefficients to the loading number, with a separate curve on the plot representing the data for tests with each tire.

39. The second step was to construct cross plots to relate the shape number to the loading numbers at several levels of performance for each deflection number. Plate 9 shows cross plots of data from the relations of pull coefficient and sinkage coefficient to the sand loading number for the three deflections. From these logarithmic plots, the relation of the reciprocal of the shape number to the sand loading number can be expressed as follows:

$$\frac{d}{b} = K \left( \frac{Gd^3}{W} \right)^{2/3} = \frac{KG^{2/3}d^2}{W^{2/3}}$$

where K is a constant of proportionality. Raising both sides to the 3/2 power:

$$\frac{d^{3/2}}{b^{3/2}} = K^{3/2} \frac{G}{W} d^3$$

$$\frac{G}{W} (bd)^{3/2} = \frac{1}{K^{3/2}} = \text{constant}$$

40. This leads to the conclusion that for each constant value of a performance coefficient for a given deflection number, there is a corresponding value composed of the pertinent independent variables, including the shape number. This combination,  $\frac{G(bd)^{3/2}}{W}$ , is designated the sand number. To illustrate the data collapse achieved with this number, the performance coefficients were plotted versus the loading number from tests at 15, 25, and 35 percent deflection. Results of the tests at 15 percent deflection shown in plate 10 are representative. Note that the data do not separate on the basis of tire size. The relation of each of the four performance coefficients to the loading number is well defined. However, in an earlier analysis of these data,<sup>15</sup> the relation of the torque coefficient to the sand number was not well defined. The improved definition is believed to be due to the increased range of data available for analysis and the correction of the deflection number to account for changes in load during the tests (see paragraph 26).

41. Effect of tire diameter. The sand number should adequately account for the effect of tire diameter on the magnitude of the performance coefficients. Data obtained from tests with the 4.00-20 (71.2-cm diameter) and 4.00-7 (35.8-cm diameter) tires were used to evaluate this hypothesis. Plate 11 contains data from tests conducted at 25 percent deflection. Similar results were obtained from tests conducted at 15 and 35 percent deflection. Some scatter is evident (this appears to be large

because of the scale used for the sand number), but the intermingling of the plotted points representing the two tires demonstrates that the sand number adequately accounts for the effects of tire diameter.

42. Effect of tire deflection. In the analysis of the effects of soil strength, tire width, and tire diameter on the wheel's performance, it was readily apparent that tire deflection significantly affected the level of performance. Plates 12 and 13 present the relation of the pull and sinkage coefficients, respectively, to the sand number. Smooth curves, representing constant values of the deflection ratio, are used in both plates to delineate the relations of the performance coefficients to the sand number. Note that the curves are of similar shape, but the values of the performance coefficients are obviously a function of tire deflection as well as of the factors included in the sand number.

43. The effects of deflection were determined from cross plots of the coordinates of points on the faired curves in plates 12 and 13. The reciprocal of the deflection number was plotted versus the values of the sand number for several constant values of the pull and sinkage coefficients. The relations that appear in plate 14 can be described adequately by a family of straight lines through the origin. The general mathematical expression for this family of straight lines is

$$\frac{h}{\delta} = K \times \frac{G(bd)^{3/2}}{W}$$

or

$$\frac{1}{K} = \frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h}$$

where  $K$  is the constant associated with a given value of a performance coefficient. This expression, which combines all of the independent  $P_i$  terms in the simplified functional equations (see paragraph 22), is termed the sand mobility number. Plate 15 shows the relation of the pull, sinkage, torque, and towed coefficients to the sand mobility number. The data points are shown to indicate the range of scatter. Symbols show the different deflections corresponding to each test. Some scatter is evident but no separation by deflection numbers is noticeable. Thus, the validity



of the sand mobility number has been established for a range of the deflection number (roughly 0.1 to 0.4). The form of the relation is such that as the deflection number approaches zero, the sand mobility number approaches zero also, which, in turn, implies very poor performance. A low deflection alone does not necessarily result in poor performance. Therefore, the quality of the relation must diminish at the very low values of the deflection number.

#### Evaluation of the Sand Mobility Number

44. Laboratory data obtained prior to this study offered an opportunity to evaluate the adequacy of the sand mobility number when tires having shapes different from those in the basic group were considered and when the rate of increase in the strength of the soil with depth was decidedly nonuniform. The laboratory data also permitted an evaluation of the relation of the sand mobility number to the performance coefficients for multiple passes in the same tire path. The available field data, although not directly comparable in many cases, illustrated the applicability of the sand mobility number to analysis of the performance of actual vehicles in natural soil.

#### Validation of single-wheel tests

45. Selected single-wheel performance data from tests previously conducted (table 5) were compared with the performance predicted from the relations developed in this analysis. Plate 16 compares the data obtained from tests with an 11.00-20, a 9.00-14, a 16x15-6R (Terra), and a 1.75-26 (bicycle) tire with the idealized performance curves. The bicycle and Terra tire data were included to illustrate that the performance coefficients of these tires with extremely different shape numbers conform to the same relation developed for the more conventional tires. The 11.00-20 data were included to increase the range of tire diameters studied. The 9.00-14 data were considered because the soil strength profiles associated with these tests were quite different from those for the basic group of tests with that tire. Representative soil strength profiles for tests

with the 9.00-14 basic and validation test tires and the 11.00-20 and Terra tires are shown in plate 17.

46. Although considerable scatter is apparent in plate 16, the idealized curves form a reasonable average of the validation data group. On the whole, these data support the performance relations developed. The scatter in the sinkage data (plate 16b) can be attributed in part to difficulties experienced in obtaining reliable sinkage measurements.

#### Relation to vehicle performance

47. Multiple-pass performance of single wheel. On most pneumatic-tired vehicles, two or more wheels travel in the same path. The performance of each wheel is influenced by the soil condition created by the preceding wheel or wheels. The result is considered to be similar to the performance of a single wheel on each of multiple passes in a single path. Plate 18 and tables 6 and 7 contain performance data for the single wheel for the second and third passes in the same path. The pull and torque coefficients developed during the second and third passes are lower than first pass values when compared at equal values of the mobility number. In plate 19, average curves representing the pull data for the first three passes of the wheel are summarized to emphasize the effects of repetitive traffic. The soil strength measured before traffic (tables 3, 4, 6, and 7) was used in computing the values of the sand mobility number, and this could contribute significantly to the scatter of the data points in plate 18 because the soil strength may increase or decrease under the action of the traffic, depending on the initial soil strength, the wheel load, tire size, etc.

48. Plate 20 shows the relation of the pull coefficient to the sand mobility number for the second and third pass performance when the soil strength values measured just prior to each pass were used to compute the mobility number (tables 8 and 9). The use of the "during traffic" soil strength values reduced the scatter somewhat for each pass, but the curves used to delineate the relations are not substantially different from those based on the "before traffic" strength data (plate 18). First, second, and third pass pull coefficient curves are compared in plate 21, and it can be seen that performance generally decreases with traffic. Soil strength

values measured before each pass were used to compute the sand mobility number. The second and third pass torque coefficient curves were also generally lower than those developed on the first pass (tables 3, 6, and 7). The reason for separation of the pull coefficient first- and third-pass curves at the higher values of the mobility number is not known; however, the associated torque coefficient curves also separated.

49. Vehicle tests (laboratory). The next step in establishing the utility of the sand mobility number was to evaluate the performance of an actual vehicle operating under controlled conditions in the laboratory. The test sections were prepared in the same manner as those for the single-wheel tests. The four-wheel-drive (4x4) test vehicle was modified so that all wheels would rotate at the same speed, and the spring suspension system was replaced with rigid connections. These revisions, while not practical in everyday use, ensured that all wheels would operate at the same slip and that the wheel loads would not be influenced by dynamic oscillations. If the single-wheel apparatus and the test vehicle operate at the same degree of efficiency, the pull versus sand mobility number relation coefficient developed by the four-wheel-drive vehicle (table 10) should be the same as the average of the pull coefficient relations for the first and second passes of a single wheel. In plate 22, the results of the vehicle tests are shown as discrete data points, while the smooth curve represents the average of the first and second pass curves for the single wheel. The average curve was obtained from plate 19 simply by averaging the pull coefficients from each curve at common values of the sand mobility number. This curve adequately represents the relation formed by the performance data for the vehicle.

50. Vehicle tests (field). Field tests have been conducted on coarse-grained soils in various parts of the world with a variety of military vehicles.<sup>2</sup> These test results (table 11) are not fully comparable to the laboratory tests because the sand at the test sites usually was moist or even wet, and the drawbar-pull tests usually were not run at a controlled slip. Instead, tests were run at several levels of pull, and only the data relevant to the maximum drawbar attained were recorded for each test in the reference. Therefore, certain assumptions were necessary

to effect a first-order evaluation of the mobility number. These are as follows:

- a. The cohesive forces were negligible; i.e., the surface cone index readings were small in relation to subsequent readings.
- b. An equivalent  $G$  can be computed from the 0- to 15-cm penetration-resistance data recorded in the reference. This implies the approximation that the rate of increase in strength with depth ( $G$ ) was constant for a given field test to a depth equal to the width of the test tires used.
- c. The vehicles were loaded so that each tire carried an equal share of the load.

51. Results of tests with 4x4 and 6x6 vehicles listed in table 3 of reference 2b are recorded in table 11 and plotted in plate 23. The intermingling of data points for tests with a variety of vehicles and with different tire sizes, tread patterns, and inflation pressures demonstrates that the sand mobility number and the assumptions listed in the preceding paragraph provide a valid basis for grouping vehicle performance data. A single curve has been drawn in plate 23 to delineate the average relation of the pull coefficient to the sand mobility number for all the vehicles.

#### Comparison of vehicle and single-wheel performance relations

52. In plate 24, the field performance data for the test vehicles are compared to the average of the first, second, and third pass performance curves obtained for single wheels in the laboratory. The single-wheel data were evaluated in terms of the soil strength data measured before traffic, since only the before-traffic strength data were available for the field tests. Both curves have the same general shape, but the ordinate values of the two curves differ by a nearly constant amount; i.e., the single-wheel data indicate a greater pull for a particular sand mobility number than was achieved during the vehicle tests. There are several factors that could contribute to the differences observed. These include differential wheel slip (front to rear and/or side to side), uneven wheel loading due to dynamic load transfer, and increased rolling resistance caused by imperfectly tracking rear wheels.

53. In plate 25, the relation of the towed coefficient to the sand

mobility number is compared to a similar relation developed for single wheels in the laboratory. These data for the field tests are listed in table 12. The difference in the ordinate values of the two curves at any value of the sand mobility number is equal to 2.5 percent of the wheel load or vehicle weight. Again, there are several factors that could contribute to these differences. These are internal friction and increased motion resistance due to imperfectly tracking rear wheels.

### Performance Prediction

54. The relation of the single-wheel pull coefficient and the pull coefficient determined from vehicle tests to the sand mobility number (plate 25) offers the basis for a tentative performance prediction system and for design criteria for vehicles operating in dry-to-moist sands. Plate 26 contains curves representing the relations of the pull and towed coefficients for wheeled vehicles to the sand mobility number. These curves can be used to forecast the mobility of existing vehicles or to select tires that will provide the desired degree of sand mobility for existing or proposed vehicles. At the present time, it is suggested that the curves be used with caution because the research effort must be broadened to effect refinements of the strength parameters and the deflection parameters. It also must be extended to include larger tires and tires of unusual shape. The following examples are given to illustrate the possible practical use of the curves in predicting performance of specific vehicles. In each example, it has been assumed that each tire carries an equal share of the load. In addition, the assumption has been made that the tangent of a slope climbed is practically equivalent numerically to a pull coefficient. The basis for this assumption is given in reference 18. Field tests conducted since that time have generally verified this assumption.<sup>2b</sup> Usually for a given set of test conditions, the maximum pull coefficient is approximately 0.02 greater than the maximum slope negotiated. However, for this analysis, this slight difference has been ignored.

Example 1

55. Soil strength and wheel load are given; slope-climbing ability or maximum drawbar pull can be computed as in the calculations that follow.

Given:

M135, 6x6 truck, 2-1/2-ton

Gross vehicle weight ( $nW$ ) = 80kN

Number of wheels ( $n$ ) = 6

Wheel load ( $W$ ) = 13.3 kN

Soil strength ( $G$ ) = 5.4 N/cm<sup>2</sup>/cm

11.00-20 single tires:  $b = 28.7$  cm;  $d = 104.9$  cm;

$$(bd)^{3/2} = 165,000 \text{ cm}^3; \delta/h = 0.35$$

Find:

Maximum drawbar-pull coefficient and slope negotiable.

Solution:

$$\Omega = \frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h} = \frac{5.4(165,000)(0.35)}{13.3 \times 1000}$$

$$\Omega = 23.5$$

Reading from plate 26,  $P/W =$  between 0.21 and 0.22; or from the equation for powered wheels in plate 26:

$$\frac{P}{W} = \frac{\Omega - 5.50}{2.12 \Omega + 33.31}$$

$$\frac{P}{W} = \frac{23.5 - 5.5}{2.12(23.5) + 33.31}$$

$$\frac{P}{W} = 0.216$$

Conclusion:

This vehicle, under the conditions specified, can climb a 21 percent slope; or on level ground, it can tow an object whose resistance does not exceed 21 percent of the weight of the prime mover. Finally, slope and maximum drawbar pull may be considered together; e.g., on a 10 percent slope, the vehicle can pull a trailer whose rolling resistance does not exceed 11.6 percent of the vehicle's weight.

Example 2

56. For design purposes, the equation can be manipulated to solve for tire size when the allowable deflection, the minimum soil strength, the design wheel load, and the required slope-climbing ability or drawbar pull are known. This is illustrated in the following calculations.

Given: Configuration = 6x6 vehicle, single-tandem tires  
Gross vehicle weight (nW) = 125 kN  
Number of wheels (n) = 6  
Wheel load (W) = 21 kN  
Soil strength (G) (minimum) = 5.4 N/cm<sup>2</sup>/cm  
Slope = 20 percent  
Maximum allowable deflection (δ/h) = 0.35

Find: Tire sizes compatible with given conditions.

Solution:  $\Omega = \frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h}$

Solving for  $(bd)^{3/2}$  yields:

$$(bd)^{3/2} = \Omega \times \frac{Wh}{GS}$$

and from the equation shown, the relation of the pull coefficient (equivalent to slope climbed) to the sand mobility number (plate 26),

$$\Omega = \frac{33.31 P/W + 5.5}{1 - 2.12 P/W}$$

Substituting the above for  $\Omega$  :

$$(bd)^{3/2} = \frac{33.31 P/W + 5.5}{1 - 2.12 P/W} \times \frac{Wh}{GS}$$

$$(bd)^{3/2} = \frac{(33.31)(0.2) + 5.5}{1 - 2.12(0.2)} \times \frac{21 \times 1000}{(5.4)(0.35)}$$

$$(bd)^{3/2} = 234,600$$

$$bd = (234,600)^{2/3}$$

$$bd = 3804 \text{ cm}^2$$

Tire selection: Try 11.00-20, 12-PR nondirectional cross country;  $b = 28.7$  cm;  $d = 104.9$  cm;  $b \times d = 3011 < 3804$  (inadequate)

Try 14.00-20, 12-PR nondirectional cross country;  $b = 36.8$  cm;  $d = 124.5$  cm;  $b \times d = 4585 > 3804$  (adequate)

Try 46x18-20R, 8-PR Terra tire;  $b = 50$  cm;  $d = 115$  cm;  $b \times d = 5750 > 3804$  (adequate)

Conclusion: The 14.00-20 and the 46x18-20R tires are adequate. In the foregoing example, only two tires were demonstrated to be adequate. Obviously, there are many tires that fulfill the requirements from a mobility standpoint. The designer must select the tire that represents the best combination of stability, ground clearance, height of truck cargo bed, cost, etc.

### Example 3

57. The mobility of a vehicle-trailer combination also may be estimated using the curves shown in plate 26. In this example, a minimum soil strength, a maximum slope, and the required vehicle and trailer data are known quantities. The necessary steps are given below.

Given:

M37, 4x4 truck, 3/4-ton

Gross vehicle weight ( $nW$ ) = 26.7 kN

Number of wheels ( $n$ ) = 4

Wheel load ( $W$ ) = 6.67 kN

Soil strength ( $G$ ) (minimum) = 5.4 N/cm<sup>2</sup>/cm

Slope (maximum) = 10 percent

9.00-16 tires:  $b = 23.4$  cm;  $d = 86.4$  cm;

$$(bd)^{3/2} = 90,730 \text{ cm}^3; \delta/h = 0.35$$

ME01, 2-wheel trailer

Gross vehicle weight ( $nW$ ) = 8 kN

Number of wheels ( $n$ ) = 2

Wheel load ( $W$ ) = 4 kN

9.00-16 tires:  $b = 23.4$  cm;  $d = 86.4$  cm;

$$(bd)^{3/2} = 90,730 \text{ cm}^3; \delta/h = 0.35$$



Find: Is the vehicle-trailer combination mobile under the conditions specified?

Solution: a. Vehicle pull:

$$\Omega = \frac{G(\text{bd})^{3/2}}{W} \times \frac{s}{h} = \frac{5.4(90,730)(0.35)}{6.67 \times 1000}$$

$$\Omega = 25.7$$

Reading from plate 26,  $P/W = 0.228$ ; or from the equation for powered wheels in plate 26:

$$\frac{P}{W} = \frac{\Omega - 5.5}{2.12 \Omega + 33.31}$$

$$\frac{P}{W} = \frac{25.7 - 5.5}{2.12(25.7) + 33.31}$$

$$\frac{P}{W} = 0.230$$

$$\text{Maximum drawbar pull on level ground} = \frac{P}{W} (nW) = (0.230)(26.7) = 6.14 \text{ kN}$$

b. Maximum drawbar pull of vehicle on 10 percent

slope: Maximum drawbar pull on a 10 percent

$$\text{slope} = \frac{P}{W} (nW) - \text{slope} (nW)$$

$$= (0.230)(26.7) - (0.10)(26.7)$$

$$= 6.14 - 2.67$$

$$= 3.47 \text{ kN, or } 3470 \text{ N}$$

c. Trailer rolling resistance (level surface):

$$\Omega = \frac{G(\text{bd})^{3/2}}{W} \times \frac{s}{h} = \frac{5.4(90,730)(0.35)}{4 \times 1000}$$

$$\Omega = 42.9$$

Reading from plate 26,  $P_T/W = 0.077$ ; or from the equation for towed wheels in plate 26:

$$\frac{P_T}{W} = \frac{0.00044 \Omega + 0.0055}{0.01144 \Omega - 0.0295} + 0.025$$

$$\frac{P_T}{W} = \frac{0.00044(42.9) + 0.0055}{0.01144(42.9) - 0.0295} + 0.025$$

$$\frac{P_T}{W} = 0.053 + 0.025 = 0.078$$

Rolling resistance on level ground (M101)

$$P_T = \frac{P_T}{W} (nW) = 0.078(8) = 0.624 \text{ kN, or } 624 \text{ N}$$

d. Rolling resistance on 10 percent slope:

Rolling resistance on a 10 percent slope

$$= \frac{P_T}{W} (nW) + \text{slope} (nW)$$

$$= 0.624 + (0.1)(8) = 1.42 \text{ kN}$$

e. Is maximum drawbar pull of an M37 on a 10

percent slope greater than the rolling

resistance of an M101 trailer on a 10 per-

cent slope under the conditions specified?

Maximum drawbar pull of an M37 on a 10

percent slope = 3.47 kN. Rolling resist-

ance of M101 on a 10 percent slope = 1.42 kN.

The M37's drawbar pull is greater.

Conclusion: Vehicle's drawbar pull exceeds the trailer's roll-  
ing resistance, so the vehicle-trailer combina-  
tion will be mobile under the conditions specified.

Carrying the calculations further, it can be seen  
that the combination would be immobilized on a  
slope of 15 to 16 percent, i.e., let

$$(\text{slope}) (\text{M37 weight}) + (\text{slope}) (\text{M101 weight})$$

$$+ \text{rolling resistance (M101)} = \text{maximum drawbar pull}$$

$$(\text{M37}) (26.7) (\text{slope}) + (8) (\text{slope}) + 0.624 = 6.14$$

$$34.7 (\text{slope}) = 5.52$$

$$\text{slope} = 0.16$$

#### Example 4

58. An all-wheel-drive vehicle has definite advantages over similar  
vehicles with nonpowered elements. The relations of pull and towed force  
to the sand mobility number can be used to show the advantages gained by

powering all the wheels. The M37, discussed in the previous example, can be used as a 4x4 or 4x2 vehicle, because the front axle can be engaged manually.

Given:

M37, 4x4 truck, 3/4-ton  
 Gross vehicle weight ( $nW$ ) = 26.7 kN  
 Number of wheels ( $n$ ) = 4  
 Wheel load ( $W$ ) = 6.67 kN  
 Soil strength ( $G$ ) (minimum) = 5.4 N/cm<sup>2</sup>/cm  
 9.00-16 tires:  $b = 23.4$  cm;  $d = 86.4$  cm;  
 $(bd)^{3/2} = 90,730$  cm<sup>3</sup>;  $\delta/h = 0.35$

Find:

Performance of M37: (a) as a 4x4 and (b) as a 4x2.

a. Pull coefficient and/or slope negotiable for 4x4 configuration:

From a of example 3:  $\Omega = 25.7$ ;  $P/W = 0.230$

b. Pull coefficient and/or slope negotiable for 4x2 configuration:

$P/W$  = maximum drawbar pull of rear wheels minus rolling resistance of front wheels

(1) Maximum drawbar pull of rear wheels:

From a of example 3:  $P/W = 0.230$

Total weight of rear axle = 13.3 kN

Maximum drawbar pull  $(0.230)(13.3)$   
 = 3.06 kN

(2) Rolling resistance of front wheels:

From the calculation of the sand mobility number given in example 3:  $\Omega = 25.7$ ; and reading from plate 26,  $P_T/W = 0.085$ ; or from the equation for towed wheels in plate 26:

$$\frac{P_T}{W} = \frac{0.00044 \Omega + 0.0055}{0.01144 \Omega - 0.0295} + 0.025$$

$$\frac{P_T}{W} = \frac{0.00044(25.7) + 0.0055}{0.01144(25.7) - 0.0295} + 0.025$$

$$\frac{P_T}{W} = 0.065 + 0.025 = 0.089$$

Total weight on front axle = 13.3 kN

Total rolling resistance on front wheels

$$(0.089)(13.3) = 1.18 \text{ kN}$$

(3) Maximum drawbar pull (rear) (3.06 kN)

- rolling resistance (1.18 kN) = 1.88 kN

$$\frac{P}{W} = \frac{1.88}{26.7} = 0.070$$

Conclusion: The 4x4 will outperform the 4x2. The latter would be immobilized on slopes of 7 percent or greater, while the 4x4 could negotiate slopes as steep as 23 percent.

## PART V: CONCLUSIONS AND RECOMMENDATIONS

### Conclusions

59. The foregoing analysis is considered adequate basis for the following conclusions:

- a. The soil parameter  $G$  adequately defines the strength of soil for the range of conditions encountered in the laboratory tests. (Paragraph 34.)
- b. The deflection parameter  $\delta/h$  is adequate for the range of deflections considered. (Paragraph 43.)
- c. The performance of pneumatic tires operating in sand, when speed and slip are constant, is dependent on the tire diameter, width, and deflection on load, and on soil strength. In dry sand, these factors can be combined into the dimensionless expression

$$\frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h} . \text{ (Paragraph 46.)}$$

- d. The average of the pull coefficients for the first and second pass of a single wheel forms a reasonable average of the points representing performance data for an actual 4x4 vehicle under laboratory conditions. (Paragraph 49.)
- e. The expression  $\frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h}$  adequately collapses the field performance data; i.e., the relation between the vehicle's field performance and the sand mobility number is similar to the relation for the laboratory performance data and the mobility number. (Paragraph 51.)
- f. The relations found can be utilized for tentative design criteria or performance prediction. (Paragraphs 54-58.)

### Recommendations

60. It is recommended that:
- a. The study of effectiveness of the soil strength parameter be extended.
  - b. The range of tire deflection conditions tested be broadened and the possibility be investigated of altering the form of the sand mobility number so that the performance of rigid wheels can be considered.

- c. Larger tires and tires of different basic shapes be included in this program.
- d. The program be extended to other soils, including those that have both cohesive and frictional strength.

#### LITERATURE CITED

1. U. S. Army Engineer Waterways Experiment Station, CE, Performance of Soils Under Tire Loads. Technical Report No. 3-666, Vicksburg, Miss.
  - a. Report 1, Test Facilities and Techniques, by J. L. McRae, C. J. Powell, and R. D. Wismer. January 1965.
  - b. Report 2, Analysis of Tests in Yuma Sand Through August 1962, by C. J. Powell and A. J. Green. August 1965.
  - c. Report 3, Tests in Clay Through November 1962, by R. D. Wismer. February 1966.
  - d. Report 4, Analysis of Tests in Sand from September 1962 Through November 1963, by G. W. Turnage and A. J. Green, Jr. February 1966.
2. \_\_\_\_\_, Trafficability of Soils. Technical Memorandum No. 3-240, Vicksburg, Miss.
  - a. Fifteenth Supplement, Tests on Coarse-Grained Soils with Self-Propelled and Towed Vehicles, 1956 and 1957, by E. S. Rush. June 1959.
  - b. Seventeenth Supplement, Tests on Coarse-Grained Soils with Self-Propelled and Towed Vehicles, 1958-1961, by E. S. Rush. May 1963.
3. Markwick, A. H. D., Dimensional Analysis of the Bearing Capacity of Soils Under Tracked Vehicles and Its Application to Model Tests. Road Research Note RN/531, Road Research Laboratory, Department of Scientific and Industrial Research, England, October 1944.
4. Nuttall, C. J., Jr., Scale Model Vehicle Testing in Non-Plastic Soil. Experimental Towing Tank Report 394, Stevens Institute of Technology, Hoboken, N. J., December 1949.
5. \_\_\_\_\_, The Rolling Resistance of Wheels in Soil. Experimental Towing Tank Report 418, Stevens Institute of Technology, Hoboken, N. J., July 1951.
6. Nuttall, C. J., Jr., and Raimond, V. M., Scaled Vehicle Mobility Factors. Report 18-2, Wilson, Nuttall, Raimond, Engineers, Inc., Chestertown, Md., July 1956.
7. Nuttall, C. J., Jr., and Wilson, C. W., Scale Model Vehicles in Snow. Report 29-3, Wilson, Nuttall, Raimond, Engineers, Inc., Chestertown, Md., January 1959.
8. Vincent, E. T., Hicks, H. H., Jr., and Kapur, D. K., Research Vehicle Mobility: Performance Coefficients for Free-Running Wheels in Sand. Report 2544-31-F, University of Michigan Research Institute, Ann Arbor, Mich., July 1960.
9. Harrison, W. L., Jr., "Analytical prediction of performance for full size and small scale model vehicles." Mechanics of Soil-Vehicle Systems: Proceedings of the 1st International Conference on the

Mechanics of Soil-Vehicle Systems, Turin, Italy (June 1961), pp 678-702.

10. Hicks, H. H., Jr., Kapur, D. K., and Vincent, E. T., A Similitude Study of the Drag and Sinkage of Wheels Using the Sinkage-Parameter System of Soil Values. Report 2860-27-1, University of Michigan Research Institute, Ann Arbor, Mich., April 1961.
11. Roma, C. J., and McGowan, R. P., Scaled Vehicle Mobility Factors (Tires in Sand). Technical Report 61-49, U. S. Army Transportation Research Command, Fort Eustis, Va., April 1961.
12. Wilson, Nuttall, Raimond, Engineers, Inc., Scaled Mobility Factors (Sand). Technical Report 61-67, U. S. Army Transportation Research Command, Fort Eustis, Va., April 1961.
13. Costello, G. A., and Dewhirst, D. L., "Effect of gravity on the mobility of a lunar vehicle." Journal of American Institute of Aeronautics and Astronauts, vol I, No. 6 (September 1963), pp 2157-2159.
14. Clark, J. M., Jr., Simon, H. P., and Roma, C. J., Correlation of Prototype and Scale Model Vehicle Performance in Clay Soils. Paper No. 782J, National Congress of the Society of Automotive Engineers, Detroit, Mich., January 1964.
15. U. S. Army Engineer Waterways Experiment Station, CE, A Dimensional Analysis of the Performance of Pneumatic Tires on Soft Soils, by D. R. Freitag. Technical Report No. 3-688, Vicksburg, Miss., August 1965. (Doctoral Dissertation, Auburn, Ala., available as Order No. 65-9633, University Microfilms, Inc., 300 N. Zeeb Road, Ann Arbor, Mich.)
16. \_\_\_\_\_, Measuring Soil Properties in Vehicle Mobility Research; Strength-Density Relations of an Air-Dry Sand, by A. J. Green, J. L. Smith, and N. R. Murphy, Jr. Technical Report No. 3-652, Report No. 1, Vicksburg, Miss., August 1964.
17. Kerisel, J., "Deep foundations in sands, variation of ultimate bearing capacity with soil density, depth, diameter, and speed." Fifth International Conference on Soil Mechanics, vol 2, Paris (1961), pp 73-83.
18. U. S. Army Engineer Waterways Experiment Station, CE, Trafficability of Soils; Slope Studies. Technical Memorandum No. 3-240, Eighth Supplement, Vicksburg, Miss., May 1951.



Table 1

## Characteristics of Basic Test Tires

Deflection %	Load N	Inflation Pressure H/cm		Carcass Section Height, cm		Section Width, cm		Tire Diam cm	Measured Rolling Circumference cm	Hard Surface Measurements			
		No	Loaded	No	Loaded	No	Loaded			Contact Area cm <sup>2</sup>	Contact Length cm	Contact Width cm	Contact Pressure H/cm <sup>2</sup>
<u>4.00-7, 2-PR</u>													
15	444	11.0	11.2	7.85	6.68	10.59	11.18	35.81	109	31.55	9.42	4.52	14.10
15	999	22.8	22.9	7.90	6.71	10.72	11.23	35.92	109	32.71	10.67	5.00	24.99
25	444	4.1	4.3	7.82	5.87	10.59	11.43	35.76	105	70.13	13.49	6.73	6.54
25	999	11.6	11.7	7.85	5.89	10.62	11.43	35.81	105	74.39	13.23	6.76	13.45
25	1511	17.8	17.9	7.90	5.92	10.67	11.61	35.82	105	74.71	13.43	6.93	20.24
35	444	1.7	1.9	7.87	5.11	10.49	11.71	35.86	102	101.68	15.75	6.62	4.58
35	999	7.0	7.2	7.85	5.11	10.59	11.89	35.81	102	100.32	15.37	8.28	9.97
35	2022	14.9	15.1	7.87	5.11	10.67	12.09	35.86	102	112.52	16.23	8.71	17.99
<u>4.00-20, 2-PR</u>													
15	999	16.9	17.0	8.03	6.83	10.62	11.51	71.09	217	59.42	15.24	5.08	16.71
15	2022	33.1	33.2	8.18	6.96	10.72	11.28	71.40	218	63.10	16.10	5.03	32.08
25	999	7.7	7.9	7.92	5.94	10.44	11.51	70.89	213	105.22	18.69	6.99	9.52
25	1511	12.4	12.5	7.98	5.94	10.54	11.58	70.99	--	115.29	19.23	6.99	14.36
25	2022	16.8	17.0	8.03	6.02	10.62	11.58	71.09	213	106.25	19.17	6.91	19.05
25	2977	25.6	25.9	8.13	6.10	10.67	11.71	71.30	214	105.35	19.69	6.68	28.29
35	999	4.3	4.6	7.90	5.13	10.29	12.07	70.84	209	146.39	21.97	8.48	6.85
35	1511	7.6	7.6	7.92	5.16	10.44	12.24	70.89	--	158.71	22.86	8.69	9.53
35	2022	10.1	10.3	7.95	5.16	10.52	12.24	70.94	210	160.64	23.01	8.59	12.60
35	2977	15.6	15.9	8.03	5.18	10.59	12.27	71.09	210	164.68	23.22	8.59	18.10
<u>6.00-16, 2-PR</u>													
15	999	5.7	5.9	13.39	11.38	16.76	17.53	71.78	215	131.74	18.29	8.38	7.99
15	2022	11.7	11.9	13.46	11.43	16.79	17.65	71.93	215	144.74	19.63	8.48	14.07
15	2977	19.9	20.0	13.51	11.48	16.81	17.78	72.03	216	132.39	19.23	8.20	22.55
15	3955	26.0	26.2	13.54	11.51	16.84	17.78	72.09	216	137.68	19.43	8.38	28.96
25	999	2.4	3.1	13.33	10.01	16.76	18.49	71.62	210	205.51	22.61	10.92	4.91
25	2022	6.9	7.1	13.39	10.33	16.76	18.34	71.78	210	219.03	23.88	10.80	9.24
25	3955	14.3	14.5	13.46	10.11	16.81	18.49	71.03	211	232.54	24.69	11.18	17.03
35	999	1.4	1.7	13.28	8.64	16.76	19.61	71.58	206	363.55	28.19	15.49	2.76
35	2022	4.5	4.8	13.39	8.71	16.76	19.56	71.78	206	324.19	28.45	13.72	5.24
35	2977	6.9	7.1	13.39	8.71	16.76	19.61	71.78	207	339.93	29.21	14.15	9.45
35	3955	8.6	9.0	13.44	8.74	16.76	19.61	71.88	207	366.19	30.18	14.55	11.03
<u>2.30-14, 2-PR</u>													
15	999	5.0	5.2	16.05	13.61	20.96	21.99	71.63	213	171.61	20.32	10.54	5.83
15	2022	11.2	11.3	16.18	13.77	21.03	21.64	71.93	215	172.90	20.83	10.16	11.71
15	3955	25.3	25.5	16.61	14.12	21.13	21.87	72.80	221	154.19	20.24	9.53	25.68
25	999	2.1	2.2	16.00	11.99	20.68	22.25	71.56	--	344.52	27.84	15.39	2.90
25	2022	5.0	5.2	16.03	12.01	20.95	22.35	71.63	207	338.06	27.31	14.73	5.98
25	2977	6.0	6.1	16.15	12.12	20.98	22.40	71.88	--	327.10	27.03	14.61	9.11
25	3955	11.2	11.3	16.18	12.14	21.03	22.53	71.93	208	323.87	27.00	14.61	12.22
35	999	1.0	1.4	15.98	10.39	20.93	23.42	71.53	213	507.74	33.02	19.70	1.97
35	2977	5.0	5.2	16.03	10.41	20.96	23.30	71.63	203	488.39	32.46	18.14	6.10
35	3955	7.0	7.3	16.15	10.49	20.96	23.77	71.88	204	452.26	32.00	17.96	8.76

Table 2

## Characteristics of Validation Test Tires

Deflection %	Load N	Inflation Pressure N/cm <sup>2</sup>		Carcass Section Height, cm		Section Width, cm		Wire Diam cm	Measured Rolling Circumference cm	Hard Surface Measurements			
		No Load	Loaded	No Load	Loaded	No Load	Loaded			Contact Area cm <sup>2</sup>	Contact Length cm	Contact Width cm	Contact Pressure N/cm <sup>2</sup>
<u>1.75-26, Bicycle Tire</u>													
15	444	27.8	29.0	3.56	3.02	4.37	4.67	71.55	199	14.19	9.91	1.78	31.30
15	999	62.7	64.3	3.56	3.02	4.50	4.80	71.55	198	15.48	10.41	2.03	63.30
35	444	8.5	9.2	3.56	2.31	4.29	5.13	71.55	196	20.35	15.49	3.05	11.17
35	999	22.8	24.0	3.56	2.31	4.37	5.11	71.55	196	39.66	14.99	3.05	26.20
<u>16x15-6R, 2-PR Terra Tire</u>													
15	999	4.7	4.8	12.70	10.30	38.61	38.61	43.18	131	161.29	21.34	8.38	6.21
15	2,022	12.1	12.2	13.41	11.40	38.61	38.61	44.60	136	233.55	20.83	7.62	15.17
15	3,199	21.3	21.4	13.97	11.89	38.61	38.61	45.72	140	145.81	20.07	9.14	21.93
25	999	2.0	2.1	12.29	9.22	38.61	38.61	42.37	129	328.39	27.69	12.95	3.00
25	2,022	4.8	5.0	12.70	9.53	38.61	38.61	43.18	131	339.35	27.94	13.72	5.93
25	3,199	8.9	9.0	13.18	9.88	38.61	38.66	44.15	133	325.16	27.43	13.72	9.86
<u>9.00-14, 2-PR</u>													
25	1,289	3.9	4.1	14.40	10.80	21.64	22.40	68.10	205	278.06	22.61	14.73	4.62
25	2,022	6.2	6.5	14.61	10.95	21.54	22.48	68.50	206	307.81	23.37	15.75	6.62
25	2,977	9.4	9.7	14.76	11.07	21.59	22.30	68.51	208	304.52	24.38	14.99	9.72
25	3,955	--	12.1	14.83	11.13	21.95	22.86	68.96	209	312.26	24.64	15.24	12.62
25	5,911	20.5	20.8	15.36	11.51	22.50	23.11	69.98	213	295.48	24.64	14.22	20.00
<u>11.00-20, 12-PR</u>													
15	13,333	--	11.2	22.94	19.51	28.98	30.40	104.95	3807	301.29	29.06	15.37	35.03
15	19,999	--	43.4	22.94	19.51	29.36	32.76	104.95	3796	409.35	29.03	17.02	48.89
23	13,333	--	13.1	22.94	17.20	28.73	31.75	104.95	3652	674.31	39.07	20.42	19.79
35	13,333	--	7.8	22.94	14.91	28.42	33.10	104.95	3557	877.48	45.36	21.59	15.17
35	19,999	--	14.5	22.94	14.91	28.98	33.10	104.95	3537	912.58	45.42	22.07	21.93

Table 3  
 Single-Strut Tests in Kevlar Band, 20 Percent Slip, First Pass, Basic Test Three

Test No.	Frictional Resistance, O	Deflection, D/h	Wheel Load, W, lb	Pull, P, lb	Torque, T, lb-in	Slip, s	Sillage, S, cm	Pull Coefficient, P/W	Torque Coefficient, T/W	Sillage Coefficient, S/W	Strength Load, q/A	Wheel Loading Number, W <sub>0</sub>	Band Number, G/b	Band Mobility Number, (D/b) <sup>3/2</sup>
160 800A	3.2	0.128	144	79	24	20.1	1.64	0.217	0.376	0.045	0.014	698.29	105.92	13.56
160 800A	3.4	0.145	144	117	24	20.2	1.99	0.265	0.576	0.076	0.012	572.09	92.01	13.66
160 800A	3.1	0.105	144	71	24	20.2	3.15	0.182	0.366	0.006	0.006	265.28	45.88	7.57
160 800A	3.2	0.128	144	90	24	20.1	2.90	0.049	0.322	0.001	0.005	277.17	45.19	6.38
160 800A	3.2	0.130	144	92	24	20.1	3.09	0.044	0.325	0.001	0.005	212.72	34.68	4.86
160 800A	3.2	0.128	144	92	24	20.1	3.09	-0.015	0.325	0.001	0.005	249.45	40.87	5.09
160 800A	3.2	0.128	144	92	24	20.0	4.00	0.025	0.325	0.001	0.004	174.05	28.52	3.94
160 800A	6.0	0.281	144	222	36	19.9	1.06	0.127	0.433	0.011	0.011	524.86	84.60	23.94
160 800A	6.2	0.283	144	240	41	20.0	1.64	0.213	0.493	0.012	0.012	562.95	90.73	25.79
160 800A	6.2	0.283	144	266	34	20.0	1.71	0.319	0.642	0.010	0.010	454.78	75.41	19.64
160 800A	6.2	0.286	144	1026	56	20.3	2.02	0.150	0.522	0.001	0.001	157.76	25.46	6.52
160 800A	6.2	0.286	144	937	52	19.4	4.58	0.047	0.477	0.001	0.001	212.57	34.31	8.10
160 800A	6.0	0.286	144	1026	39	18.7	3.50	0.279	0.477	0.006	0.006	297.31	47.99	12.29
160 800A	6.2	0.286	144	1311	70	19.5	3.74	0.068	0.276	0.003	0.003	120.51	19.58	4.89
160 800A	6.2	0.324	144	208	37	20.4	0.85	0.143	0.510	0.013	0.013	612.84	96.63	34.69
160 800A	7.7	0.378	144	244	44	19.7	0.80	0.367	0.420	0.004	0.004	494.12	62.80	21.98
160 800A	9.1	0.424	144	235	46	19.7	1.08	0.374	0.478	0.004	0.004	543.38	87.83	29.64
160 800A	9.1	0.424	144	244	65	20.3	0.94	0.236	0.421	0.007	0.007	300.80	46.38	16.74
160 800A	9.1	0.424	144	244	51	20.3	7.57	-0.078	0.325	0.002	0.002	75.58	12.16	4.00
160 800A	6.0	0.339	144	493	117	20.0	2.15	0.255	0.367	0.003	0.003	161.42	26.19	8.88
160 800A	1.8	0.116	875	114	131	19.9	6.61	0.137	0.424	0.011	0.011	723.23	11.76	3.68
160 800A	1.6	0.113	875	117	130	20.0	4.39	0.189	0.364	0.003	0.003	967.31	56.98	8.15
160 800A	1.6	0.113	875	117	145	19.4	2.44	0.257	0.384	0.006	0.006	2140.64	123.54	17.67
160 800A	1.6	0.113	875	117	241	20.2	3.73	0.116	0.367	0.010	0.010	227.60	48.14	6.74
160 800A	2.0	0.136	875	128	239	19.4	2.27	0.035	0.377	0.001	0.001	414.40	24.10	3.28
160 800A	3.3	0.180	875	148	246	20.4	8.56	0.077	0.362	0.013	0.013	642.27	37.56	5.23
160 800A	4.1	0.183	875	243	243	20.7	3.88	0.134	0.361	0.004	0.004	781.54	45.60	6.52
160 800A	3.2	0.181	875	243	250	19.4	3.88	0.137	0.361	0.004	0.004	1064.22	98.45	8.24
160 10A	7.6	0.242	949	137	144	20.3	1.11	0.332	0.445	0.011	0.011	2818.88	159.26	38.54
160 10A	4.7	0.228	949	135	150	19.8	1.45	0.312	0.440	0.008	0.008	1824.91	94.28	23.81
160 10A	4.0	0.243	949	147	120	19.7	1.03	0.313	0.440	0.008	0.008	1227.70	70.25	17.07
160 10A	4.1	0.243	949	143	215	20.4	4.03	0.210	0.440	0.008	0.008	784.62	46.17	10.64
160 10A	0.9	0.222	877	233	314	20.1	18.15	-0.103	0.480	0.000	0.000	174.62	7.81	1.73
160 20A	6.0	0.324	949	1017	165	20.1	1.77	0.475	0.440	0.008	0.008	2794.68	154.65	34.72
160 20A	6.0	0.324	949	1017	247	19.8	1.72	0.123	0.440	0.010	0.010	1848.50	104.50	8.15
160 20A	5.3	0.311	949	662	276	20.6	2.12	0.314	0.443	0.005	0.005	1003.03	51.10	18.93
160 10A	1.6	0.130	2177	2673	398	20.1	14.52	-0.038	0.417	0.001	0.001	236.77	13.62	4.49
160 800A	1.7	0.141	549	213	128	19.3	3.81	0.236	0.366	0.002	0.002	79.89	77.53	10.93
160 800A	3.8	0.141	549	217	135	20.1	0.70	0.147	0.348	0.004	0.004	1490.42	168.22	24.05
160 800A	4.0	0.147	549	217	158	19.9	1.11	0.131	0.480	0.005	0.005	1872.43	206.82	30.40

(Continued)

Table 3 (continued)

Test No.	Penetration- Resistance Gradient, G	Dist. Along EXTRUSION	Wheel Load M M M LBS	Pull P, LBS	Torque Q, INCH	Slip S, %	Sinkage S, CM	Pull Coefficient $\frac{P}{W}$	Torque Coefficient $\frac{Q}{P \cdot S}$	Sinkage Coefficient $\frac{S}{D}$	Strength Load Ratio OH CM <sup>-3</sup>	Head Location Number D <sub>1</sub> V	Head Number D <sub>2</sub> V	Head Stability Number D <sub>3</sub> V
168	8084	0.15	1333	1235	174	19.7	1.79	0.138	0.109	0.025	0.003	1169.87	131.31	18.25
169	8074	0.15	2020	1920	360	19.6	3.26	0.235	0.366	0.045	0.002	255.50	69.31	9.46
170	8064	0.15	4577	2737	690	20.0	9.16	0.015	0.368	0.127	0.001	248.22	28.01	9.34
171	8054	0.15	1935	3784	128	19.9	7.96	0.035	0.368	0.110	0.001	1450.21	28.03	4.01
172	8044	0.25	998	1039	188	20.0	1.47	0.474	0.536	0.021	0.004	1794.76	104.03	42.48
173	8034	0.25	999	973	170	19.5	0.65	0.470	0.532	0.012	0.005	921.97	104.88	42.65
174	8024	0.25	2022	1086	311	21.2	1.66	0.432	0.479	0.023	0.002	168.59	19.73	4.38
175	8014	0.25	2022	1084	237	20.6	9.98	0.043	0.365	0.128	0.000	483.51	34.80	11.24
176	8004	0.25	5915	3782	984	20.3	3.28	0.287	0.375	0.046	0.001	284.98	28.80	7.78
177	8014	0.25	5915	3782	984	20.3	6.09	0.140	0.375	0.065	0.001	104.51	11.81	2.75
178	8004	0.25	1935	1972	471	20.6	16.54	-0.083	0.369	0.227	0.000	69.69	73.64	24.82
179	8004	0.15	999	964	169	21.0	2.35	0.499	0.385	0.031	0.002	184.10	206.75	76.09
180	8014	0.15	2022	1097	176	20.0	0.74	2.502	0.537	0.010	0.005	593.10	118.31	38.19
181	8024	0.15	2022	1094	335	20.8	8.85	0.169	0.394	0.183	0.001	199.14	22.40	7.19
182	8034	0.15	5915	3777	512	20.1	2.97	0.301	0.469	0.041	0.001	428.66	148.24	16.12
2.00-14, 2-75														
183	7994	0.15	999	977	149	20.0	2.01	0.364	0.424	0.028	0.002	917.42	149.17	21.34
184	7984	0.15	999	942	131	20.0	2.09	0.316	0.406	0.017	0.002	697.58	108.80	15.56
185	7974	0.15	1008	1008	143	19.7	2.69	0.349	0.481	0.029	0.004	141.88	234.49	35.41
186	7964	0.15	2022	1942	182	19.6	1.71	0.489	0.539	0.024	0.005	396.44	304.83	46.03
187	7954	0.15	2022	1942	266	20.0	5.87	0.137	0.377	0.088	0.001	311.85	49.30	7.15
188	7944	0.15	2022	1844	284	20.0	3.71	0.251	0.388	0.092	0.001	488.18	77.18	14.54
189	7934	0.15	2022	1844	270	20.0	2.99	0.300	0.399	0.042	0.002	662.05	104.66	15.39
190	7924	0.15	2022	1844	306	19.7	6.30	0.173	0.410	0.088	0.001	101.02	47.29	6.66
191	7914	0.15	2022	1844	307	20.1	2.31	0.306	0.442	0.132	0.003	1013.99	199.43	21.60
192	7904	0.15	3915	3657	408	16.7	9.60	0.206	0.472	0.080	0.000	180.21	28.19	3.97
193	7894	0.15	3915	3657	408	16.7	6.40	0.151	0.399	0.088	0.001	284.90	44.51	6.45
194	7884	0.15	3915	3657	476	20.0	5.07	0.171	0.460	0.070	0.001	348.30	56.04	8.07
195	7874	0.15	3915	3657	476	20.4	3.42	0.224	0.466	0.047	0.001	538.71	84.26	12.11
196	7864	0.15	3915	3617	512	20.6	4.02	0.277	0.394	0.110	0.001	266.07	41.62	5.78
197	7854	0.25	666	686	121	19.9	0.76	0.528	0.601	0.011	0.005	1831.10	290.84	68.64
198	7844	0.25	999	973	177	19.7	1.15	0.493	0.514	0.016	0.004	1307.94	206.06	50.28
199	7834	0.25	999	929	176	19.7	0.56	0.569	0.569	0.008	0.007	2548.26	199.82	50.37
200	7824	0.25	2022	1919	326	20.5	1.21	0.469	0.526	0.027	0.002	752.72	119.11	27.16
201	7814	0.25	2022	2017	337	20.3	1.86	0.436	0.520	0.026	0.002	681.66	107.86	26.97
202	7804	0.25	2022	2017	379	20.0	10.41	0.032	0.393	0.066	0.000	140.00	20.52	4.78
203	7794	0.25	2022	2017	371	20.0	10.40	0.016	0.385	0.144	0.000	102.59	16.19	3.77
204	7784	0.25	2022	2017	385	20.4	13.27	-0.006	0.390	0.158	0.000	90.52	14.27	3.05
205	7774	0.25	2022	2017	402	20.1	10.18	0.031	0.401	0.142	0.000	122.80	19.36	4.69
206	7764	0.25	2022	2017	424	20.1	10.18	0.199	0.447	0.082	0.001	128.16	19.06	15.09
207	7754	0.25	2022	2017	424	20.1	1.86	0.390	0.402	0.022	0.001	491.31	76.09	18.26
208	7744	0.25	3915	3703	519	19.0	0.11	0.568	0.402	0.077	0.000	2067.64	324.80	121.19
209	7734	0.25	999	1079	215	20.1	0.71	0.525	0.602	0.006	0.004	1475.56	231.86	81.22
210	7724	0.25	999	1008	359	20.6	2.17	0.480	0.536	0.030	0.000	142.93	90.99	50.99
211	7714	0.25	2022	1827	490	20.4	6.89	0.180	0.399	0.096	0.000	141.49	28.39	7.48
212	7704	0.25	2022	1827	562	20.4	1.40	0.397	0.426	0.020	0.001	369.15	56.72	19.51

Table 4

Single-Wheel Tests in Yuma Sand, Toward Point, First Pass, Basic Test Types

Test No.	Penetration-Resistance Gradient, G N/cm <sup>2</sup> /cm	Deflection		Wheel Load		roll P <sub>1</sub> , N	Slip S <sub>1</sub> %	Sinkage S <sub>2</sub> , cm	Pull Coef. F N	Sinkage Coef. F N	Strength-Load Ratio G <sub>N</sub> cm <sup>-2</sup>	Sand Loading Number G <sub>1</sub> N	Sand Number G <sub>2</sub> (bd) <sup>3/2</sup> N	Sand Mobility Number X(bd) <sup>1/2</sup> N <sup>1/2</sup>
		Design S/b	Test S <sub>1</sub> <sup>2</sup>	Design W <sub>1</sub> , N	Test W <sub>2</sub> , N									
4.00-7, 2-P														
164 700A	5.3	0.15	0.131	444	377	-57	-7.5	0.96	-0.259	0.067	0.014	623.09	103.43	13.55
164 820A	5.4	0.15	0.140	444	471	-53	-3.1	1.32	-0.123	0.037	0.012	528.91	95.07	13.27
164 850A	3.1	0.25	0.175	444	546	-63	-7.0	2.47	-0.171	0.069	0.006	262.09	42.15	7.38
164 800A	4.2	0.15	0.140	699	933	-26	-12.4	1.87	-0.305	0.052	0.005	208.67	34.00	4.83
164 877A	6.0	0.25	0.301	444	537	-15	-2.5	0.70	-0.095	0.005	0.011	507.51	81.80	24.62
165 350A	6.5	0.25	0.304	444	542	-17	-1.2	1.32	-0.033	0.037	0.012	540.11	98.50	24.11
164 831A	5.2	0.1	0.110	882	822	-10	-5.7	0.48	-0.130	0.027	0.010	462.15	74.60	15.07
164 822A	4.3	0.25	0.241	999	999	-43	-4.2	0.86	-0.139	0.025	0.005	207.65	33.57	8.00
164 829A	6.0	0.25	0.250	444	1039	-11	-2.0	0.50	-0.107	0.014	0.006	299.30	47.37	12.27
164 826A	3.9	0.25	0.254	1511	1286	-324	-7.0	2.55	-0.210	0.022	0.003	117.50	19.07	4.88
164 834A	6.2	0.35	0.343	444	484	-57	-4	0.20	-0.114	0.004	0.013	504.03	91.07	24.11
164 834A	5.7	0.35	0.354	666	675	-57	-3.9	0.10	-0.094	0.003	0.008	338.94	61.07	21.94
165 1A	7.5	0.35	0.350	666	644	-64	-3.0	0.75	-0.103	0.021	0.012	333.21	56.61	30.32
164 830A	6.4	0.35	0.350	999	995	-75	-3.8	0.15	-0.076	0.004	0.006	294.00	47.30	16.55
164 832A	6.8	0.35	0.342	2022	1955	-244	-5.0	1.23	-0.174	0.034	0.003	151.75	24.05	8.87
5.00-20, 2-P														
164 701A	2.6	0.15	0.147	500	965	-204	-11	3.3	-0.211	0.027	0.003	451.66	55.11	8.11
164 703A	5.4	0.15	0.148	999	689	-124	-1.0	1.11	-0.118	0.021	0.004	2024.00	117.40	17.37
164 702A	4.2	0.15	0.143	2022	1391	-466	-10.0	4.52	-0.244	0.004	0.002	808.17	47.01	6.72
164 704A	4.1	0.15	0.147	2022	1955	-444	-0.2	3.05	-0.227	0.027	0.002	757.72	44.05	6.47
164 705A	5.2	0.15	0.148	2022	1486	-386	-7.6	3.42	-0.195	0.044	0.002	944.11	51.04	8.15
165 14A	7.4	0.25	0.251	999	1002	-70	-2.6	0.00	-0.074	0.000	0.006	2681.71	151.54	36.04
165 15A	4.7	0.25	0.263	999	1057	-48	-2.0	3.74	-0.246	0.011	0.004	1528.60	90.34	23.76
165 16A	4.0	0.25	0.249	1511	1502	-93	-1.0	0.65	-0.062	0.004	0.003	1195.06	68.38	27.01
165 16A	4.1	0.25	0.247	2022	1999	-311	-2.0	1.96	-0.146	0.028	0.002	730.95	42.10	10.42
165 21A	8.0	0.35	0.358	999	1035	-66	-2.7	0.00	-0.204	0.014	0.008	2744.72	161.00	54.43
165 22A	8.0	0.35	0.360	1511	1511	-44	-1.8	0.60	-0.070	0.009	0.004	1632.44	107.56	37.28
165 20A	5.3	0.35	0.343	2022	1964	-93	-0.9	0.65	-0.045	0.020	0.003	961.23	54.86	18.82
6.00-16, 2-P														
164 802A	1.7	0.15	0.144	444	946	-145	-8.8	2.50	-0.155	0.036	0.002	657.54	75.34	10.85
164 805A	3.9	0.15	0.145	999	971	-66	-2.5	0.00	-0.070	0.000	0.004	1469.62	165.57	24.05
164 804A	4.8	0.15	0.149	999	686	-57	-2.6	0.50	-0.092	0.007	0.005	1799.44	203.09	30.26
164 808A	3.9	0.15	0.147	1333	1309	-84	-2.6	0.40	-0.207	0.007	0.003	1206.18	124.58	18.31
164 807A	3.1	0.15	0.150	2022	2035	-266	-3.3	2.43	-0.131	0.034	0.002	455.25	63.75	8.56
165 31A	1.2	0.15	0.147	2977	2888	-1377	-37.6	8.96	-0.449	0.124	0.000	161.42	18.21	2.68
164 810A	4.1	0.25	0.264	999	1066	-44	-1.3	0.10	-0.242	0.010	0.004	1413.96	159.93	42.22
164 817A	4.6	0.25	0.248	999	991	-42	-1.5	3.70	-0.263	0.001	0.005	1723.31	194.91	48.34
164 816A	5.0	0.25	0.250	2022	2022	-79	-3.3	0.75	-0.040	0.011	0.002	907.73	102.45	25.61
165 33A	0.7	0.25	0.238	2022	1906	-208	-34.3	9.05	-0.424	0.126	0.000	136.72	15.44	3.67
164 812A	4.3	0.25	0.247	3955	3944	-137	-9.2	1.70	-0.088	0.025	0.001	412.25	46.59	11.42
164 817A	2.9	0.25	0.245	3955	3835	-78	-8.1	3.92	-0.200	0.094	0.001	278.98	41.53	7.72
164 803A	1.7	0.35	0.346	999	999	-115	-4.5	1.30	-0.116	0.019	0.002	676.99	71.00	24.86
164 813A	5.3	0.35	0.349	3955	1662	-48	-1.1	0.41	-0.046	0.006	0.005	1816.46	207.09	75.97
164 814A	5.2	0.35	0.344	2022	1622	-35	-1.3	0.10	-0.012	0.011	0.003	931.71	110.80	36.12
165 34A	1.0	0.35	0.352	2977	2995	-1093	-30.9	4.24	-0.360	0.127	0.000	123.90	13.68	4.92
164 811A	4.3	0.35	0.343	3955	3866	-213	-2.3	0.62	-0.095	0.012	0.001	416.83	46.95	16.10
9.00-14, 2-P														
164 750A	2.4	0.15	0.152	700	1022	-53	-4.7	0.60	-0.052	0.008	0.002	877.53	136.86	21.11
164 751A	1.8	0.15	0.150	999	939	-92	-4.7	1.40	-0.098	0.021	0.002	647.82	102.51	15.38
164 750A	4.1	0.15	0.154	999	1022	-75	-4.2	1.02	-0.074	0.015	0.004	1462.55	231.43	35.10
164 756A	5.3	0.15	0.153	999	1034	-26	-2.2	1.06	-0.026	0.015	0.005	1624.92	294.26	45.63
164 772A	2.6	0.15	0.152	2022	2044	-431	-4.7	2.62	-0.113	0.036	0.001	469.08	74.16	11.27
164 770A	3.5	0.15	0.151	2022	2035	-137	-2.5	1.83	-0.069	0.015	0.002	644.70	101.92	15.39
164 773A	1.5	0.15	0.145	2022	1937	-437	-11.9	4.62	-0.216	0.064	0.001	286.52	45.30	6.57
164 769A	5.4	0.15	0.152	2022	2044	-43	-2.6	1.17	-0.046	0.016	0.003	987.53	155.27	23.60
164 781A	3.5	0.15	0.143	3955	3871	-624	-4.2	4.05	-0.177	0.054	0.001	385.96	54.11	8.61
164 780A	5.2	0.15	0.147	3955	3829	-328	-0.9	2.22	-0.045	0.031	0.001	523.14	81.85	12.03
165 5A	3.2	0.25	0.241	666	639	-31	-0.5	0.00	-0.069	0.000	0.005	1794.99	264.76	62.63
165 6A	3.5	0.25	0.250	999	999	-31	-2.0	0.46	-0.311	0.006	0.003	1273.06	200.56	50.14
165 7A	6.6	0.25	0.241	999	999	-26	-0.8	0.46	-0.078	0.006	0.007	2538.26	399.88	96.31
165 8A	3.0	0.25	0.246	2022	1982	-124	-2.4	1.10	-0.063	0.015	0.002	729.09	115.57	28.38
165 27A	3.7	0.25	0.244	2022	2066	-66	-3.4	1.00	-0.032	0.014	0.002	665.54	105.31	26.75
165 28A	6.9	0.25	0.245	2977	2915	-1124	-29.7	7.75	-0.386	0.106	0.000	120.03	14.07	4.67
165 3A	4.2	0.25	0.248	3955	3777	-33	-1.7	0.05	-0.021	0.001	0.001	414.18	65.48	15.05
165 24A	4.8	0.25	0.244	3955	3831	-35	-2.9	0.46	-0.041	0.006	0.001	469.22	74.15	18.09
165 9A	6.1	0.35	0.373	999	1079	-79	0.4	0.46	-0.074	0.006	0.006	2067.64	324.90	121.19
165 11A	4.1	0.35	0.351	999	1004	-57	0.2	0.65	-0.052	0.001	0.004	1482.11	232.89	51.74
165 12A	7.5	0.35	0.349	2977	2968	-97	-0.6	0.00	-0.033	0.000	0.003	923.12	146.69	30.98
165 13A	1.1	0.35	0.343	2977	2962	-973	-13.8	5.18	-0.192	0.072	0.000	137.37	21.74	7.46
165 13A	3.7	0.35	0.351	3955	3964	-173	-0.9	0.61	-0.044	0.008	0.001	379.65	55.19	19.37

Table 5

Single-Wheel Tests in Yuma Sand, 20 Percent Slip,  
First Pass, Validation Test Tires

Test No.	Penetration-Resistance Gradient, G $N/cm^2/cm$	Wheel Load F	Design Deflection $\frac{\delta}{h}$	Pull Coefficient $\frac{P}{W}$	Sinkage Coefficient $\frac{z}{d}$	Sand
						Mobility Number $\frac{G(\delta d)^{3/2}}{W} \times \frac{\delta}{h}$
<u>1.75-26, Bicycle Tire</u>						
161 499A	5.4	444	0.15	0.152	0.044	9.0
161 504A	2.7	444	0.15	0.148	0.071	6.0
161 510A	6.5	444	0.15	0.231	0.025	13.0
161 497A	4.3	999	0.15	0.053	0.088	4.0
161 503A	3.5	999	0.15	-0.030	0.160	3.0
161 508A	2.7	999	0.15	-0.005	0.154	2.0
161 511A	7.3	999	0.15	0.119	0.056	6.0
161 500A	5.4	444	0.35	0.250	0.034	22.0
161 502A	2.2	444	0.35	0.110	0.083	10.0
161 505A	2.7	444	0.35	0.131	0.072	12.0
161 498A	4.6	999	0.35	0.080	0.075	9.0
161 501A	1.9	999	0.35	0.000	0.162	4.0
161 506A	2.4	999	0.35	0.020	0.162	5.0
161 507A	3.8	999	0.45	0.051	0.080	7.0
161 509A	2.7	999	0.35	0.000	0.142	5.0
<u>9.00-14, 2-PR</u>						
160 243A	1.9	1,289	0.25	0.348	0.028	22.3
161 345A	2.7	1,289	0.25	0.409	0.021	30.5
161 253A	4.0	1,289	0.25	0.466	0.011	44.0
161 261A	5.4	1,289	0.25	0.433	0.007	58.8
161 344A	2.6	2,022	0.25	0.362	0.021	19.1
161 252A	3.5	2,022	0.25	0.393	0.017	25.6
161 331A	4.4	2,022	0.25	0.432	0.004	31.2
161 245A	2.1	2,022	0.25	0.261	0.052	15.4
161 335A	2.1	2,022	0.25	0.290	0.042	14.9
161 348A	5.7	2,022	0.25	0.423	0.010	40.8
161 267A	5.8	2,022	0.25	0.409	0.008	40.8
161 250A	3.8	2,978	0.25	0.323	0.021	19.1
161 341A	2.8	2,978	0.25	0.286	0.047	14.2
161 262A	5.8	2,978	0.25	0.382	0.021	29.1
161 332A	4.7	2,978	0.25	0.388	0.014	23.3
160 238A	1.6	2,978	0.25	0.126	0.075	7.8
161 248A	1.9	3,956	0.25	0.158	0.079	7.1
161 343A	2.6	3,956	0.25	0.201	0.056	9.9
160 234A	3.9	3,956	0.25	0.277	0.029	14.5
160 242A	2.2	3,956	0.25	0.093	0.097	7.9
161 264A	5.9	3,956	0.25	0.355	0.024	21.3
160 240A	1.6	5,911	0.25	-0.069	0.157	4.3
161 244A	2.1	5,911	0.25	-0.024	0.124	5.0
161 260A	5.5	5,911	0.25	0.257	0.041	13.3
161 349A	2.9	5,911	0.25	0.112	0.074	7.0
161 350A	3.2	5,911	0.25	0.145	0.075	7.7
160 236A	4.2	5,911	0.25	0.179	0.043	11.1
<u>16x1.5-6R, 2-PR Terra Tire</u>						
162 645A	1.0	999	0.15	0.214	0.082	10.0

(Continued)

Table 5 (Concluded)

Test No.	Penetration-Resistance Gradient, G	Wheel Load	Design Deflection	Pull Coefficient	Sinkage Coefficient	Sand Mobility Number
	$N/cm^2/cm$	N	$\frac{\delta}{H}$	$\frac{P}{W}$	$\frac{z}{d}$	$\frac{G(bd)^{3/2}}{W} \times \frac{\delta}{H}$
<u>16x15-6R, 2-PR terra Tite (Continued)</u>						
162 646A	1.6	999	0.15	0.338	0.041	18.0
162 650A	4.6	999	0.15	0.450	0.029	48.0
162 647A	1.3	2,022	0.15	0.072	0.096	7.0
162 648A	2.1	2,022	0.15	0.229	0.052	12.0
162 649A	3.7	2,022	0.15	0.310	0.046	19.0
162 651A	1.2	3,199	0.15	--	--	--
162 652A	2.2	3,199	0.15	0.150	0.066	7.0
162 653A	4.8	3,199	0.15	0.211	0.053	16.0
162 654A	2.0	3,199	0.15	0.127	0.079	6.0
162 658A	1.4	999	0.25	0.335	0.050	25.0
162 659A	2.2	999	0.25	0.557	0.038	37.0
162 662A	5.9	999	0.25	0.538	0.021	100.0
162 657A	1.2	2,022	0.25	0.210	0.081	10.0
162 660A	2.2	2,022	0.25	0.400	0.040	18.0
162 661A	5.4	2,022	0.25	0.475	0.021	47.0
162 655A	2.1	3,199	0.25	0.289	0.054	11.0
162 656A	1.2	3,199	0.25	-0.012	0.148	6.0
162 663A	5.2	3,199	0.25	0.353	0.039	28.0
263 25A	4.8	13,333	0.15	0.076	0.076	8.8
263 26A	4.3	13,333	0.15	0.055	0.082	7.9
263 27A	3.5	13,333	0.15	0.037	0.103	6.4
263 28A	2.8	13,333	0.15	0.035	0.111	5.1
263 29A	1.6	13,333	0.15	0.004	0.124	3.0
263 41A	5.3	13,333	0.15	0.097	0.081	9.8
263 42A	3.0	13,333	0.15	0.041	0.097	5.6
263 43A	1.7	13,333	0.15	0.004	0.131	3.2
263 44A	5.2	19,999	0.15	0.026	0.120	6.4
263 45A	4.0	19,999	0.15	0.006	0.122	4.9
263 46A	3.8	19,999	0.15	-0.026	0.123	4.8
263 47A	3.1	19,999	0.15	-0.054	0.146	3.8
263 48A	2.0	19,999	0.15	-0.076	0.153	2.5
<u>11.00-20, 12-PR</u>						
263 30A	4.3	13,333	0.23	0.236	0.057	10.9
263 31A	3.9	13,333	0.23	0.158	0.064	10.0
263 32A	3.5	13,333	0.23	0.172	0.076	8.9
263 33A	3.1	13,333	0.23	0.170	0.081	7.8
263 34A	2.7	13,333	0.23	0.127	0.088	6.9
263 35A	1.7	13,333	0.23	0.060	0.097	4.4
263 36A	4.3	13,333	0.25	0.330	0.050	36.6
263 37A	4.4	13,333	0.25	0.295	0.044	17.0
263 38A	4.0	13,333	0.25	0.310	0.055	15.6
263 39A	3.1	13,333	0.25	0.299	0.050	12.1
263 40A	1.9	13,333	0.25	0.222	0.093	7.3
263 49A	5.0	19,999	0.25	0.239	0.054	14.3
263 50A	4.2	19,999	0.25	0.203	0.067	11.9
263 51A	3.3	19,999	0.25	0.197	0.087	9.5
263 52A	3.1	19,999	0.25	0.169	0.103	9.0
263 53A	2.0	19,999	0.25	0.115	0.133	5.6

Table 6

Single-Wheel Tests in Yuma Sand, 20 Percent Slip, Second Pass, Basic Test Runs

Test No.	Penetration-Resistance Gradient, $\sigma$ N/cm <sup>2</sup> /cm	Deflection $\frac{\delta}{h}$		Wheel Load $\frac{W}{N}$	Full $P, N$	Torque $Q, N\cdot m$	Slip $\delta, \%$	Sinkage $s, cm$	Pull Coefficient $\frac{P}{W}$	Torque Coefficient $\frac{Q}{W}$	Sinkage Coefficient $\frac{s}{\delta}$	Strength- Ratio $\frac{P}{W}$	Swath- Width $\frac{W}{P}$	Swath Length Number $\frac{L}{W}$	Road Number $\frac{W}{P}$	Mobility Number $\frac{L}{W}$
		Max	Min													
16A 790A	5.3	0.15	0.138	444	68	27	20.1	1.61	0.156	0.352	0.244	0.013	607.36	607.36	97.68	13.40
16A 800A	5.4	0.15	0.132	444	106	21	20.0	0.99	0.255	0.313	0.038	0.011	596.24	596.24	25.93	12.86
16A 810A	5.1	0.15	0.146	444	57	31	19.8	1.91	0.114	0.346	0.046	0.006	276.73	276.73	42.48	7.55
16A 820A	5.4	0.15	0.134	999	871	22	19.9	2.37	0.066	0.190	0.047	0.005	486.48	486.48	177.23	6.38
16A 830A	5.2	0.15	0.148	999	22	50	19.8	2.40	0.025	0.332	0.074	0.004	118.01	118.01	37.54	9.1
16A 840A	5.4	0.15	0.137	999	0	50	19.9	2.55	0.000	0.338	0.071	0.004	170.48	170.48	20.10	3.99
16A 850A	6.0	0.25	0.250	444	173	25	19.9	0.55	0.297	0.341	0.015	0.013	608.01	608.01	98.70	24.50
16A 860A	6.5	0.25	0.268	444	466	32	20.0	0.10	0.383	0.417	0.001	0.011	608.01	608.01	102.83	27.52
16A 870A	8.3	0.25	0.230	888	164	47	20.5	1.42	0.206	0.342	0.040	0.010	474.99	474.99	76.47	17.43
16A 880A	3.5	0.25	0.230	999	906	16	19.7	1.11	0.089	0.389	0.087	0.004	178.64	178.64	23.81	6.63
16A 890A	4.3	0.25	0.225	999	66	46	19.8	2.45	0.075	0.297	0.068	0.007	254.26	254.26	47.28	8.14
16A 900A	6.6	0.25	0.249	999	158	56	20.6	2.28	0.138	0.333	0.064	0.007	307.98	307.98	49.71	12.46
16A 910A	3.9	0.25	0.234	1511	17	74	19.8	3.24	0.012	0.295	0.290	0.003	116.92	116.92	20.55	4.81
16A 920A	6.2	0.35	0.319	444	359	26	19.7	0.45	0.400	0.440	0.013	0.016	19.17	19.17	113.81	38.12
16A 930A	5.7	0.35	0.344	666	643	40	19.7	1.45	0.279	0.401	0.042	0.009	404.17	404.17	64.08	22.03
16A 940A	7.5	0.35	0.339	666	213	41	19.7	1.27	0.333	0.406	0.046	0.011	547.62	547.62	87.22	28.57
16A 950A	6.4	0.35	0.337	999	946	22	19.8	1.40	0.235	0.315	0.044	0.007	304.28	304.28	59.74	16.76
16A 960A	1.9	0.35	0.318	999	8	44	20.4	2.36	0.010	0.292	0.066	0.002	77.48	77.48	17.43	3.94
16A 970A	6.8	0.35	0.327	2022	1879	79	20.0	3.12	0.085	0.265	0.087	0.004	164.48	164.48	26.99	8.64
16A 790A	1.8	0.15	0.138	999	182	117	19.9	1.61	0.205	0.375	0.024	0.002	712.68	712.68	41.17	5.68
16A 791A	2.6	0.15	0.134	999	199	109	20.0	2.36	0.231	0.352	0.031	0.003	1079.29	1079.29	62.29	9.75
16A 792A	5.6	0.15	0.140	999	911	117	20.1	2.05	0.259	0.367	0.043	0.006	2192.95	2192.95	126.45	17.72
16A 793A	3.2	0.15	0.140	2022	1039	230	20.0	3.25	0.135	0.453	0.119	0.002	831.60	831.60	48.37	6.77
16A 794A	2.0	0.15	0.136	2022	1791	218	20.6	11.34	0.107	0.343	0.149	0.001	413.37	413.37	24.04	3.27
16A 795A	3.3	0.15	0.140	2022	1839	243	19.9	3.11	0.123	0.373	0.041	0.002	643.82	643.82	37.45	5.24
16A 796A	4.1	0.15	0.136	2022	1786	228	20.0	2.90	0.159	0.364	0.041	0.002	868.85	868.85	48.21	6.56
16A 797A	5.2	0.15	0.142	2022	1875	230	20.3	3.15	0.154	0.346	0.044	0.003	1000.05	1000.05	50.17	8.25
16A 14A	7.6	0.25	0.237	999	297	124	19.7	1.58	0.319	0.292	0.022	0.008	2698.60	2698.60	164.81	36.82
16A 15A	4.7	0.25	0.270	999	597	130	19.4	0.50	0.278	0.403	0.007	0.005	1690.97	1690.97	52.56	23.89
16A 16A	5.0	0.25	0.238	1511	1427	165	20.3	2.25	0.31	0.337	0.049	0.004	1262.31	1262.31	72.22	17.19
16A 16A	5.1	0.25	0.239	2022	1893	230	20.2	3.28	0.174	0.350	0.046	0.002	772.11	772.11	44.56	10.65
16A 17A	0.9	0.25	0.228	2022	2679	311	19.7	0.00	0.010	0.314	0.030	0.000	170.12	170.12	7.54	1.72
16A 21A	8.0	0.35	0.340	999	944	143	20.0	1.27	0.396	0.446	0.018	0.008	2749.22	2749.22	163.20	25.49
16A 22A	1.2	0.35	0.344	999	1097	132	20.0	1.09	0.248	0.379	0.015	0.001	410.15	410.15	22.70	6.24
16A 23A	8.0	0.35	0.340	1511	1477	199	19.7	1.41	0.340	0.404	0.020	0.005	1931.81	1931.81	109.17	37.55
16A 20A	5.3	0.35	0.320	2022	1866	243	20.7	2.65	0.267	0.394	0.037	0.003	1011.40	1011.40	27.73	11.99
16A 18A	1.8	0.35	0.332	2022	2693	325	20.2	0.00	0.028	0.347	0.000	0.001	235.21	235.21	1.33	4.44
16A 800A	1.7	0.15	0.141	999	219	115	20.1	2.12	0.214	0.374	0.040	0.002	686.89	686.89	77.53	10.93
16A 805A	4.8	0.15	0.141	999	515	119	20.3	1.54	0.246	0.371	0.021	0.004	1531.83	1531.83	24.44	24.44
16A 805A	4.8	0.15	0.141	999	964	126	20.5	1.02	0.317	0.390	0.012	0.005	1980.88	1980.88	216.76	20.56
16A 805A	3.9	0.15	0.137	1313	306	153	20.0	0.249	0.249	0.326	0.025	0.003	1170.03	1170.03	131.78	18.05

1.00-20, 2-PR

1.00-20, 2-PR

6.00-16, 2-PR

(Continued)



Table 6 (continued)

Test No.	Penetration-Resistance Gradient, G	Deflection b/h	Wheel Load P, lb	Full P, lb	Torque Q, lb-in	Slip %	Sinkage s, cm	Full Coefficient $\frac{P}{Q}$	Torque Coefficient $\frac{Q}{P}$	Sinkage Coefficient $\frac{s}{P}$	Braking Ratio $\frac{Q}{W}$	Load No.	Load No. $\frac{Q}{W}$	Sink Number $\frac{Q}{W}$	Sink Number $\frac{Q}{W}$	Stability Number $\frac{Q}{W}$
16A 807A	3.1	0.140	3062	315	239	20.0	3.13	0.164	0.347	0.044	0.002	599.38	599.38	67.99	67.99	9.46
16A 808A	1.9	0.138	2977	151	311	19.9	3.01	0.076	0.124	0.042	0.003	299.71	299.71	29.29	29.29	4.04
16A 810A	2.5	0.140	3955	177	438	20.2	4.03	0.048	0.335	0.096	0.001	258.13	258.13	38.47	38.47	1.99
16A 816A	4.1	0.268	4053	482	165	19.8	0.75	0.401	0.473	0.011	0.004	1431.86	1431.86	161.95	161.95	42.43
16A 817A	4.6	0.241	999	959	149	19.5	0.80	0.403	0.466	0.011	0.005	1779.35	1779.35	201.23	201.23	48.50
16A 818A	7.0	0.241	2068	611	265	19.9	1.47	0.326	0.413	0.003	0.003	949.46	949.46	107.16	107.16	21.02
16A 819A	0.8	0.233	3022	266	209	19.5	1.33	0.144	0.326	0.019	0.000	187.36	187.36	14.46	14.46	4.46
16A 820A	4.3	0.238	3955	313	438	20.3	3.81	0.144	0.345	0.053	0.001	428.60	428.60	48.44	48.44	11.53
16A 821A	2.9	0.241	3955	377	440	20.3	4.35	0.107	0.338	0.061	0.001	284.98	284.98	32.20	32.20	7.76
16A 823A	1.7	0.336	999	369	149	19.9	1.01	0.368	0.477	0.014	0.002	658.79	658.79	74.67	74.67	4.09
16A 824A	5.3	0.261	999	1044	177	19.3	0.71	0.495	0.502	0.010	0.005	1847.56	1847.56	205.22	205.22	18.36
16A 825A	1.5	0.304	8028	759	268	20.3	1.30	0.387	0.461	0.018	0.003	790.29	790.29	121.86	121.86	9.17
16A 826A	4.3	0.316	9577	484	325	19.3	3.06	0.179	0.360	0.043	0.001	144.79	144.79	14.25	14.25	1.27
16A 827A	4.3	0.316	9577	484	325	20.1	3.70	0.213	0.374	0.051	0.001	426.14	426.14	47.59	47.59	16.03
6.00-10.0-2-PR (Continued)																
16A 776A	2.4	0.147	999	973	130	19.7	1.08	0.301	0.307	0.015	0.003	981.61	981.61	114.81	114.81	21.44
16A 776A	1.9	0.145	999	955	130	20.0	1.86	0.204	0.307	0.015	0.004	671.99	671.99	107.28	107.28	15.56
16A 776A	4.1	0.149	999	942	136	19.7	0.85	0.344	0.348	0.012	0.004	1561.05	1561.05	231.63	231.63	15.43
16A 776A	3.3	0.149	999	921	147	19.6	0.66	0.377	0.379	0.016	0.005	1018.91	1018.91	118.23	118.23	7.18
16A 777A	2.6	0.143	2022	346	231	20.2	2.42	0.192	0.379	0.037	0.001	500.61	500.61	70.15	70.15	15.32
16A 778A	3.2	0.143	2022	371	224	20.2	1.75	0.216	0.387	0.027	0.001	629.80	629.80	109.06	109.06	6.65
16A 779A	1.7	0.146	2022	1848	241	19.7	1.45	0.171	0.382	0.035	0.001	300.30	300.30	47.47	47.47	6.65
16A 779A	2.4	0.146	2022	1923	240	19.6	1.48	0.062	0.382	0.040	0.003	1032.12	1032.12	169.33	169.33	23.70
16A 779A	1.7	0.137	3955	372	461	19.6	1.08	0.088	0.388	0.054	0.000	183.32	183.32	28.27	28.27	3.99
16A 779A	2.8	0.144	3955	3768	461	19.9	1.92	0.088	0.388	0.054	0.001	287.63	287.63	44.99	44.99	6.48
16A 780A	3.5	0.144	3955	3768	461	19.9	1.92	0.114	0.388	0.054	0.001	360.01	360.01	56.31	56.31	8.11
16A 780A	2.2	0.144	3955	3768	461	19.9	2.79	0.115	0.388	0.053	0.001	515.51	515.51	84.76	84.76	22.06
16A 781A	2.5	0.137	3955	3723	447	20.0	3.28	0.084	0.390	0.045	0.001	270.72	270.72	42.34	42.34	5.80
16A 781A	3.8	0.285	666	682	108	19.6	0.71	0.507	0.529	0.008	0.005	1804	1804	292.92	292.92	62.64
16A 781A	2.2	0.284	999	968	148	20.3	0.15	0.460	0.493	0.030	0.004	131.14	131.14	207.00	207.00	50.30
16A 781A	3.9	0.285	999	915	189	20.3	0.00	0.408	0.529	0.000	0.007	2190.06	2190.06	401.74	401.74	76.42
16A 781A	1.7	0.285	3022	1928	281	20.5	0.86	0.355	0.529	0.012	0.002	749.25	749.25	118.56	118.56	27.39
16A 781A	0.9	0.285	3022	1968	285	20.1	1.05	0.332	0.529	0.015	0.002	698.59	698.59	110.34	110.34	26.86
16A 781A	0.9	0.285	3022	1968	285	19.7	1.81	0.330	0.529	0.015	0.000	130.84	130.84	26.65	26.65	4.79
16A 781A	0.8	0.285	3022	1968	285	20.3	1.86	0.131	0.529	0.022	0.000	103.34	103.34	16.30	16.30	3.76
16A 781A	4.8	0.285	3022	2844	373	20.2	3.06	0.131	0.529	0.022	0.000	123.95	123.95	19.55	19.55	4.66
16A 781A	4.8	0.285	3022	2844	373	20.1	1.95	0.224	0.529	0.042	0.001	434.10	434.10	68.63	68.63	15.92
16A 781A	4.8	0.285	3022	3175	483	20.1	1.95	0.238	0.529	0.027	0.001	483.61	483.61	76.45	76.45	18.27
16A 781A	6.1	0.336	999	1028	167	20.0	0.36	0.509	0.538	0.005	0.006	2184.50	2184.50	343.26	343.26	122.20
16A 781A	4.1	0.336	999	979	165	20.4	0.66	0.495	0.538	0.005	0.004	1490.73	1490.73	243.67	243.67	82.85
16A 781A	7.5	0.336	2877	2844	493	20.3	0.91	0.416	0.538	0.013	0.003	963.61	963.61	152.69	152.69	51.54
16A 781A	1.1	0.336	3955	3811	639	20.0	3.18	0.226	0.538	0.044	0.000	140.82	140.82	22.23	22.23	7.49
16A 781A	3.7	0.336	3955	3719	505	20.3	1.55	0.296	0.538	0.022	0.001	373.49	373.49	58.82	58.82	19.70

0.00-10.0-2-PR

Table 7

Single-Sided Tests in Yum Sand, 20 Percent Slip, Third Pass, Basic Test Lines

Test No.	Penetration-Resistance Oreduct, 0 k/cm <sup>2</sup> /cm	Deflection 0/h		Wheel Load k		Pull k		Torque m-h		Slip %		Sinkage cm		Full Coefficient		Torque Coefficient		Sinkage Coefficient		Strength-Load Ratio G/M		Beam Loading Number Gd		Sand Number G(10) <sup>3/2</sup>		Hand Mobility Number G(10) <sup>3/2</sup>		
		Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	Basic	Test	
16A 790A	5.3	0.15	0.17	444	408	57	27	20.1	1.04	0.141	0.173	0.029	0.011	994.16	97.56	13.47												
16A 800A	5.4	0.15	0.135	444	422	75	21	20.9	0.94	0.179	0.290	0.028	0.013	590.15	94.92	12.81												
16A 805A	3.1	0.15	0.163	444	488	62	29	19.4	1.04	0.127	0.344	0.030	0.008	293.06	47.13	7.29												
16A 811A	3.1	0.15	0.137	999	875	0	50	20.0	1.01	0.000	0.322	0.028	0.008	179.39	29.25	4.01												
16A 827A	5.0	0.25	0.236	444	413	124	24	19.9	0.83	0.301	0.349	0.021	0.014	640.31	106.45	25.12												
16A 838A	6.5	0.25	0.388	444	466	142	29	20.0	0.97	0.395	0.660	0.027	0.014	680.01	102.83	27.28												
16A 831A	6.3	0.25	0.11	888	786	155	43	19.9	1.07	0.198	0.327	0.030	0.011	193.04	77.97	17.28												
16A 830A	3.3	0.25	0.230	999	902	13	43	20.4	1.40	0.015	0.773	0.034	0.004	179.42	32.98	6.14												
16A 832A	4.3	0.25	0.275	999	888	44	44	20.2	1.32	0.096	0.288	0.028	0.007	38.20	6.14	6.14												
16A 839A	6.6	0.25	0.290	999	999	108	52	20.4	1.72	0.107	0.306	0.048	0.007	305.24	49.27	12.32												
16A 836A	3.9	0.25	0.232	1511	1431	-13	70	20.0	1.93	-0.009	0.281	0.094	0.001	141.11	20.11	4.80												
16A 813A	6.2	0.35	0.392	444	444	164	31	19.7	0.80	0.370	0.433	0.025	0.014	647.45	132.42	35.85												
16A 834A	5.7	0.35	0.340	666	644	182	39	19.7	0.80	0.289	0.773	0.032	0.009	107.71	64.86	22.08												
16A 835A	7.5	0.35	0.300	666	644	186	48	19.5	1.08	0.289	0.773	0.032	0.009	513.61	87.61	29.15												
16A 837A	6.4	0.35	0.344	999	937	173	48	20.2	1.40	0.165	0.311	0.049	0.007	112.21	50.21	17.27												
16A 832A	6.8	0.35	0.380	2022	1853	124	93	20.0	2.15	0.067	0.306	0.060	0.004	168.77	27.38	8.76												
16A 790A	1.8	0.15	0.139	999	902	199	111	20.1	0.72	0.222	0.348	0.010	0.002	702.14	40.52	5.63												
16A 791A	4.6	0.15	0.137	999	884	204	107	20.2	0.80	0.231	0.345	0.008	0.003	1046.84	60.41	3.28												
16A 792A	2.6	0.15	0.137	999	879	226	101	20.1	1.06	0.258	0.354	0.015	0.006	2270.37	131.03	17.95												
16A 793A	1.2	0.15	0.137	2022	1752	233	237	19.7	1.99	0.141	0.171	0.028	0.002	890.08	49.45	6.77												
16A 792A	1.3	0.15	0.139	2022	1817	262	243	20.2	1.62	0.144	0.176	0.014	0.009	651.69	37.91	5.27												
16A 794A	4.1	0.15	0.134	2022	1768	234	183	20.0	1.51	0.161	0.156	0.021	0.002	817.13	48.69	6.32												
16A 793A	3.2	0.15	0.142	2022	1875	306	175	20.6	1.56	0.164	0.155	0.022	0.003	1000.05	58.17	8.26												
16A 18A	7.6	0.25	0.232	999	911	370	119	20.1	1.29	0.307	0.382	0.018	0.008	2369.50	167.81	38.93												
16A 19A	6.7	0.25	0.239	999	946	266	121	19.7	1.12	0.285	0.374	0.016	0.005	1766.23	100.94	24.12												
16A 19A	8.0	0.25	0.237	1511	1413	315	161	20.0	1.61	0.225	0.311	0.023	0.004	1570.25	72.68	17.22												
16A 18A	4.1	0.25	0.240	2022	1902	328	230	19.9	1.76	0.173	0.149	0.025	0.002	768.52	44.75	10.04												
16A 21A	8.0	0.35	0.340	999	964	368	135	19.8	1.37	0.382	0.418	0.019	0.008	2949.27	163.20	55.49												
16A 22A	1.2	0.35	0.364	999	1066	315	135	20.1	0.60	0.295	0.376	0.004	0.001	406.77	22.51	8.22												
16A 23A	8.0	0.35	0.339	1511	1444	424	195	19.9	1.67	0.135	0.402	0.024	0.004	1973.41	111.52	37.80												
16A 24A	5.1	0.35	0.327	2022	1853	424	225	19.9	1.77	0.261	0.364	0.023	0.003	1018.57	58.15	19.01												
16A 18A	1.6	0.35	0.316	2977	2746	342	314	19.7	0.00	0.425	0.324	0.000	0.001	230.64	13.26	4.19												
16A 802A	1.7	0.15	0.141	999	915	199	109	20.0	1.24	0.213	0.19	0.017	0.002	690.22	77.90	10.93												
16A 803A	3.8	0.15	0.140	999	911	211	111	19.9	0.98	0.291	0.309	0.014	0.004	1561.31	171.92	24.35												
16A 804A	4.8	0.15	0.141	999	920	271	120	20.2	1.02	0.292	0.370	0.014	0.005	1911.36	215.73	30.42												
16A 805A	3.9	0.15	0.136	1333	1204	288	146	20.3	1.25	0.240	0.346	0.017	0.003	1395.99	134.70	18.38												
16A 807A	3.1	0.15	0.139	2022	1911	306	228	20.6	1.76	0.160	0.339	0.025	0.003	602.17	67.90	9.44												
16A 804A	1.9	0.15	0.139	2977	2746	342	308	19.9	0.45	0.073	0.316	0.006	0.001	294.67	28.72	3.99												
16A 810A	2.5	0.15	0.141	3955	3688	217	429	20.4	7.34	0.059	0.326	0.019	0.001	250.61	28.40	4.19												

(Continued)

Table 7 (Concluded)

Test No.	Penetration-Resistance Gradient, G	Deflection $\frac{W}{L^2}$	Wheel Load $\frac{W}{L^2}$	Full P.L.	Torque $\frac{Q}{L^2}$	Slip $\frac{S}{L}$	Sinkage $\frac{S}{L}$	Pull Coefficient $\frac{P}{Q}$	Torque Coefficient $\frac{Q}{P}$	Sinkage Coefficient $\frac{S}{P}$	Strength-Load Ratio $\frac{W}{L^2}$	Sands Loading Number $\frac{Q}{L^2}$	Sands Number, $\frac{Q}{L^2} \times \frac{1}{L}$	Sands No. by Number $\frac{Q}{L^2} \times \frac{1}{L}$
164 216A	4.1	0.25	0.260	408	153	19.3	0.75	0.393	0.440	0.011	0.004	1450.21	164.03	42.65
164 216A	4.0	0.25	0.239	342	202	20.4	1.24	0.284	0.378	0.017	0.003	950.50	108.41	25.91
164 216A	4.0	0.25	0.234	315	209	19.1	0.20	0.190	0.326	0.004	0.000	165.79	16.71	4.38
164 216A	4.3	0.25	0.238	407	428	19.5	2.69	0.134	0.335	0.037	0.001	429.12	48.50	11.54
164 217A	4.9	0.25	0.239	422	489	19.4	1.93	0.114	0.334	0.027	0.001	280.34	32.39	7.79
164 202A	1.7	0.35	0.289	382	344	20.3	0.71	0.410	0.470	0.010	0.002	671.34	76.09	25.03
164 211A	5.3	0.35	0.160	557	173	19.8	0.46	0.144	0.524	0.006	0.005	1871.27	212.10	76.36
164 211A	5.3	0.35	0.136	719	276	19.9	1.45	0.173	0.440	0.016	0.003	1028.85	113.86	38.26
164 212A	1.5	0.35	0.283	604	348	19.5	0.30	0.221	0.374	0.004	0.001	198.17	22.37	7.22
164 212A	4.3	0.35	0.333	804	444	19.7	2.25	0.214	0.363	0.031	0.001	459.07	48.39	16.11
164 776A	2.4	0.15	0.145	275	127	19.7	1.13	0.290	0.285	0.016	0.003	943.14	149.24	21.64
164 776A	4.1	0.15	0.147	311	134	20.0	0.99	0.288	0.288	0.014	0.002	665.60	103.32	15.48
164 776A	5.3	0.15	0.145	317	135	19.7	0.94	0.330	0.420	0.013	0.002	251.08	23.90	35.90
164 776A	1.6	0.15	0.146	319	246	19.6	0.55	0.347	0.282	0.008	0.005	1586.73	315.97	46.45
164 777A	2.6	0.15	0.146	342	241	20.6	0.00	0.170	0.372	0.000	0.001	321.41	50.81	7.22
164 782A	3.5	0.15	0.146	342	241	20.3	1.14	0.191	0.164	0.020	0.001	547.71	80.26	11.40
164 782A	1.7	0.15	0.141	459	243	19.5	1.75	0.235	0.373	0.034	0.002	694.76	109.83	15.60
164 782A	1.7	0.15	0.145	459	243	19.5	1.15	0.226	0.354	0.019	0.003	47.25	6.66	23.65
164 782A	2.8	0.15	0.145	266	239	20.0	0.40	0.096	0.329	0.006	0.000	1037.14	163.97	3.97
164 782A	3.4	0.15	0.144	359	421	20.0	1.87	0.096	0.318	0.026	0.001	182.65	26.57	6.49
164 782A	2.2	0.15	0.143	431	437	20.0	1.78	0.117	0.332	0.025	0.001	362.61	56.72	8.11
164 782A	2.5	0.15	0.144	484	430	20.2	2.26	0.130	0.326	0.031	0.001	540.01	84.46	12.16
164 782A	2.5	0.15	0.141	311	432	20.4	1.61	0.085	0.316	0.022	0.001	264.44	41.36	5.83
165 2A	3.2	0.25	0.211	328	104	20.4	0.50	0.496	0.216	0.004	0.005	1886.71	299.33	69.15
165 2A	3.5	0.25	0.239	404	149	20.0	0.56	0.427	0.470	0.008	0.004	1744.79	211.86	50.63
165 2A	2.6	0.25	0.237	453	177	20.2	0.20	0.413	0.277	0.003	0.007	2998.40	409.36	97.02
165 2A	3.9	0.25	0.228	1919	262	20.4	1.34	0.326	0.410	0.019	0.002	753.72	119.11	27.16
165 2A	3.7	0.25	0.230	662	264	20.4	1.00	0.300	0.411	0.014	0.002	708.18	112.06	26.33
165 2A	0.9	0.25	0.230	471	331	20.3	0.56	0.175	0.360	0.008	0.000	134.58	20.92	4.81
165 2A	4.8	0.25	0.232	471	326	19.9	0.10	0.173	0.353	0.001	0.000	101.36	15.30	3.78
165 2A	4.8	0.25	0.232	724	401	19.6	2.49	0.201	0.367	0.035	0.001	434.10	68.63	15.92
165 2A	4.8	0.25	0.242	755	457	19.7	2.31	0.200	0.367	0.032	0.001	476.20	75.28	18.22
165 9A	6.1	0.35	0.349	475	162	19.8	0.30	0.478	0.532	0.004	0.006	2843.02	392.15	123.01
165 11A	4.1	0.35	0.316	453	165	20.0	0.56	0.472	0.478	0.008	0.006	1990.73	243.67	81.39
165 12A	7.5	0.35	0.334	1091	414	20.0	0.91	0.388	0.664	0.013	0.003	978.73	153.92	51.41
165 13A	1.1	0.35	0.331	765	314	20.7	0.30	0.274	0.388	0.004	0.001	143.07	22.61	7.49
165 14A	3.7	0.35	0.333	1035	489	20.3	1.74	0.281	0.411	0.024	0.001	376.84	99.31	19.75

Table 8  
Penetration Resistance Gradient, First  
Pais, Basic Test Tires

Test No.	Design Deflection $\frac{\delta}{h}$	Penetration-Resistance Gradient, G $\frac{N}{cm^2/cm}$	Test No.	Design Deflection $\frac{\delta}{h}$	Penetration-Resistance Gradient, G $\frac{N}{cm^2/cm}$
<u>4.00-7, 2-PR</u>			<u>6.00-16, 2-PR (Continued)</u>		
164 798A	0.15	5.3	165 35A	0.15	1.2
164 824A	0.15	5.4	164 810A	0.15	2.5
164 825A	0.15	3.1	164 816A	0.25	4.1
164 799A	0.15	5.4	165 37A	0.25	4.6
164 800A	0.15	4.2	164 818A	0.25	5.0
164 801A	0.15	4.9	164 819A	0.25	0.8
164 821A	0.15	3.4	165 32A	0.25	0.6
164 827A	0.25	6.0	165 33A	0.25	0.7
164 828A	0.25	6.5	164 812A	0.25	4.3
164 829A	0.25	8.3	164 817A	0.25	2.9
164 820A	0.25	3.5	165 31A	0.25	1.0
164 822A	0.25	4.3	164 803A	0.35	1.7
164 829A	0.25	6.6	164 813A	0.35	5.3
164 826A	0.25	3.9	164 814A	0.35	5.3
164 833A	0.35	6.2	164 815A	0.35	1.5
164 834A	0.35	5.7	165 34A	0.35	1.0
165 1A	0.35	7.5	164 811A	0.35	4.3
164 830A	0.35	6.4			
165 2A	0.35	1.5	<u>9.00-14, 2-PR</u>		
164 832A	0.35	0.8	164 778A	0.15	2.4
<u>4.00-20, 2-PR</u>			164 779A	0.15	1.8
164 790A	0.15	1.8	164 780A	0.15	4.1
164 791A	0.15	2.6	164 786A	0.15	5.3
164 793A	0.15	5.6	164 774A	0.15	1.6
164 782A	0.15	4.2	164 777A	0.15	2.6
164 789A	0.15	2.0	164 782A	0.15	3.5
164 792A	0.15	3.3	164 783A	0.15	1.5
164 794A	0.15	4.1	164 785A	0.15	5.4
164 795A	0.15	5.2	164 775A	0.15	1.7
165 14A	0.25	7.6	164 776A	0.15	2.8
165 15A	0.25	4.7	164 781A	0.15	3.5
165 19A	0.25	5.0	164 784A	0.15	5.2
165 16A	0.25	4.1	164 787A	0.15	2.5
165 17A	0.25	0.9	165 5A	0.25	3.2
165 21A	0.35	8.0	165 4A	0.25	3.5
165 23A	0.35	1.2	165 7A	0.25	6.6
165 22A	0.35	8.0	165 6A	0.25	3.9
165 20A	0.35	5.3	165 27A	0.25	3.7
165 18A	0.35	1.8	165 8A	0.25	0.9
<u>6.00-16, 2-PR</u>			165 25A	0.25	0.8
164 802A	0.15	1.7	165 26A	0.25	0.7
164 805A	0.15	3.8	165 28A	0.25	0.9
164 809A	0.15	4.8	165 3A	0.25	4.2
164 808A	0.15	3.9	165 24A	0.25	4.8
164 807A	0.15	3.1	165 9A	0.35	6.1
164 804A	0.15	1.9	165 11A	0.35	4.1
			165 12A	0.35	7.5
			165 13A	0.35	1.1
			165 10A	0.35	3.7

Table 9  
Ball Mobility Numbers Completed from Second- and Third-Pass Ball-Distance Tests, Basic Test Three

Test No.	Second Pass		Third Pass		Penetration-Resistance Gradient, $\frac{D}{M/cm^2/cm}$	Ball Mobility Number $\frac{(D_{ball})^{1/2}}{M}$	Penetration-Resistance Gradient, $\frac{D}{M/cm^2/cm}$	Ball Mobility Number $\frac{(D_{ball})^{1/2}}{M}$
	$\frac{D}{M/cm^2/cm}$	$\frac{(D_{ball})^{1/2}}{M}$	$\frac{D}{M/cm^2/cm}$	$\frac{(D_{ball})^{1/2}}{M}$				
164 790A	4.3	11.06	4.2	11.40	164 800A	1.7	21.66	15.04
164 790A	4.2	10.11	4.6	10.89	164 800A	2.0	11.48	16.40
164 790A	2.8	6.69	3.3	7.94	164 800A	2.7	6.74	8.28
164 790A	3.7	4.11	2-pass test		164 800A	1.9	4.04	4.04
164 800A	3.0	3.96	3.1	3.69	164 810A	2.5	1.90	4.84
164 800A	4.9	20.04	2.3	22.26	164 810A	1.8	11.81	18.74
164 800A	5.8	24.69	6.0	26.06	164 810A	4.1	16.77	17.11
164 810A	5.1	13.01	6.6	14.28	164 810A	1.6	4.15	11.77
164 810A	0.7	2.10	3.1	5.90	164 810A	1.5	6.42	7.79
164 810A	7.4	6.36	4.5	6.68	164 810A	3.0	6.66	8.01
164 810A	4.2	7.81	4.2	7.79	164 810A	1.6	21.04	25.83
164 810A	3.3	3.94	3.4	4.24	164 810A	1.9	25.56	28.26
164 810A	5.2	11.49	5.2	29.61	164 810A	1.6	25.74	28.26
164 810A	4.7	18.37	5.0	19.46	164 810A	2.5	11.25	12.17
164 810A	6.2	24.73	7.2	28.38	164 810A	2.4	11.03	8.62
164 810A	4.5	11.77	5.0	11.60				
164 810A	1.1	2.66	2-pass test					
164 810A	3.8	4.91	4.1	5.75				
		4.00-16, 2-PR						
		4.00-23, 2-PR						
164 790A	1.9	6.11	2.2	6.93	164 790A	2.1	12.78	14.72
164 790A	2.3	7.17	2.4	7.84	164 790A	1.8	15.26	17.47
164 790A	3.7	11.67	1.7	11.08	164 790A	1.2	10.21	11.42
164 790A	2.1	3.71	2.7	4.17	164 790A	1.2	8.14	10.42
164 790A	1.8	2.83	2.1	3.71	164 790A	2.0	8.28	9.84
164 790A	4.3	13.71	2.1	11.08	164 790A	1.8	11.46	12.24
164 790A	2.8	4.37	2.6	4.97	164 790A	1.4	7.85	9.03
164 790A	3.0	4.78	2.8	4.96	164 790A	1.1	16.15	18.62
164 810A	6.6	11.97	7.2	16.89	164 790A	2.1	4.87	5.87
164 810A	3.1	13.70	3.1	15.16	164 790A	2.1	4.93	5.94
164 810A	3.1	12.68	3.1	10.71	164 790A	1.7	7.44	8.46
164 810A	3.1	1.23	2.7	7.10	164 790A	1.6	4.15	6.02
164 810A	0.7	1.23	2-pass test		164 810A	1.0	4.17	6.13
164 810A	6.1	42.38	6.4	44.20	164 810A	1.1	47.16	57.45
164 810A	1.8	11.90	5.0	16.43	164 810A	6.1	83.55	94.25
164 810A	3.0	45.95	5.0	27.25	164 810A	1.4	21.63	28.97
164 810A	3.1	11.60	1.0	10.73	164 810A	1.6	8.21	11.09
164 810A	1.1	2.77	1.8	4.19	164 810A	2.2	7.17	10.80
		6.00-16, 2-PR						
164 810A	1.5	9.89	1.9	10.38	164 810A	1.8	14.17	17.33
164 810A	3.0	19.00	3.1	19.81	164 810A	1.9	14.17	17.33
		(Continued)						

Table 10

4x4 Vehicle Tests in Yuma Sand, Laboratory Tests,  
20 Percent Slip, First Pass

Test No.	Penetration-Resistance Gradient, G	Design Deflection	Design Load	Pull	Pull Coefficient	Sand Mobility Number
	$N/cm^2/cm$	$\frac{\delta}{h}$	W, N	P, N	$\frac{P}{W}$	$\frac{G(bd)^{3/2}}{W} \times \frac{\delta}{h}$
<u>4.50-18, 4-PR</u>						
32 4	4.7	0.15	3956	489	0.031	4.3
33 4	3.8	0.15	3956	-267	-0.017	3.2
36 4	3.5	0.15	3956	-400	-0.025	3.2
38 4	5.9	0.15	3956	578	0.037	5.4
34 4	3.7	0.35	3956	2267	0.143	7.9
37 4	3.1	0.35	3956	1778	0.112	6.7
40 4	5.1	0.35	3956	3467	0.219	10.9
41 4	3.9	0.35	3956	2711	0.171	8.3
<u>2.00-14, 2-PR</u>						
46 4	5.3	0.15	3956	3200	0.202	11.7
47 4	3.0	0.15	3956	1000	0.063	6.6
48 4	3.4	0.15	3956	2178	0.138	7.6
49 4	1.8	0.15	3956	289	0.018	4.0
43 4	3.4	0.35	3956	5200	0.329	17.7
44 4	2.6	0.35	3956	4000	0.253	13.5
45 4	5.2	0.35	3956	5733	0.362	26.4
51 4	1.7	0.35	3956	3222	0.204	8.7

Table 1  
 Vehicle Tests in Coarse-Grained Soils, Field Tests,  
 Maximum Drawn Pull, First Pass

Test No.	Soil Index* 0-100	Frictional Coefficient $\mu$	Wheel Load (lb)	Inflation Pressure (psi)	Deflection (in)	Penetration (in)	Draw Mobility Number $\frac{W}{W + P}$
<u>M3A, 4x4 Jeep, Padre Island, Tex.</u>							
1	177	34	7,992	21	0.066	0.243	49.4
2	301	33	7,992	14	0.113	0.320	21.0
3	170	33	7,992	10	0.134	0.375	73.5
4	347	34	7,992	7	0.173	0.421	81.0
14	317	31	7,992	21	0.130	0.243	46.2
14	362	35	7,992	14	0.120	0.295	51.8
14	352	35	7,992	10	0.111	0.304	74.0
21	135	30	7,992	7	0.100	0.447	90.8
28	290	28	7,992	21	0.130	0.243	56.4
33	185	28	7,992	14	0.130	0.247	46.3
37	370	30	7,992	10	0.120	0.348	66.0
42	341	31	7,992	7	0.211	0.387	59.8
<u>M37, 4x4 Truck, 3 1/2-Ton, Padre Island, Tex.</u>							
44	367	32	6,311	21	0.114	0.181	54.1
47	347	31	6,311	14	0.144	0.255	55.0
50	110	28	6,311	10	0.198	0.297	67.4
51	67	28	6,311	7	0.198	0.359	74.5
56	312	28	7,111	21	0.120	0.173	47.1
57	337	30	7,111	14	0.156	0.227	60.4
58	330	30	7,111	10	0.142	0.283	73.0
70	340	31	7,111	7	0.246	0.386	107.8
72	272	28	7,978	21	0.132	0.174	57.0
73	310	33	7,978	21	0.111	0.199	48.8
74	360	33	7,978	7	0.152	0.187	48.8
79	56	8	7,978	21	0.137	0.126	11.8
80	96	9	7,978	21	0.142	0.113	13.0
82	337	30	7,978	14	0.180	0.253	62.1
86	62	6	7,978	14	0.180	0.143	11.6
87	122	11	7,978	14	0.180	0.179	22.7
89	300	27	7,978	10	0.216	0.291	66.5
93	69	6	7,978	10	0.216	0.171	15.3
94	110	10	7,978	10	0.216	0.240	24.6
97	330	30	7,978	7	0.276	0.361	93.5
101	98	9	7,978	7	0.276	0.349	68.1
102	101	9	7,978	7	0.275	0.285	28.9
<u>M37, 4x4 Truck, 3/4-Ton, Cape Cod, Mass.</u>							
103	123	12	6,311	21	0.114	0.161	17.2
104	128	12	6,311	21	0.114	0.157	17.2
105	104	9	6,311	14	0.144	0.177	17.7
106	136	12	6,311	14	0.144	0.212	22.7
107	139	12	6,311	14	0.144	0.200	23.2
108	138	12	6,311	10	0.168	0.250	27.1
109	131	12	6,311	10	0.168	0.239	24.9
110	131	12	6,311	10	0.168	0.250	25.9
111	120	11	6,311	7	0.198	0.306	27.5
112	125	11	6,311	7	0.198	0.288	29.2
113	103	9	6,311	7	0.198	0.299	23.6
<u>M135, 6x6 Truck, 2-1/2-Ton, Padre Island, Tex.</u>							
147	325	29	12,933	21	0.126	0.284	46.8
148	105	9	12,933	21	0.126	0.133	19.2
150	352	32	12,933	14	0.195	0.342	78.4
153	352	32	12,933	10	0.220	0.372	66.4
156	347	29	12,933	7	0.273	0.419	98.4
159	144	13	13,689	14	0.090	0.072	14.0
160	114	10	13,689	14	0.090	0.061	11.1
163	143	13	13,689	21	0.160	0.180	24.9
164	160	14	13,689	21	0.160	0.200	27.5
165	156	14	13,689	21	0.160	0.192	27.0
166	129	12	13,689	21	0.160	0.147	22.3
167	139	12	13,689	14	0.210	0.220	31.4

(Continued)

\* Values taken directly from TR 3-240, 17th Supplement.

\*\*  $\frac{W}{W+P}$  represents the ratio of the total pull to vehicle weight.

Table 11 (Continued)

Test No.	Cone Index 0-15 cm	Penetration Resistance Drainage $\frac{P}{W}$ $\frac{N}{cm^2}$	Wheel Load $W$ (N)	Inflation Pressure $P$ $N/cm^2$	Deflection $\delta$ cm	$\frac{P}{W}$	Sand Mobility Number
							$\frac{3(\delta)^{3/2}}{W} \times \frac{P}{H}$
<u>MC25, 6x6 Truck, 2-1/2-Ton, Padre Island, Tex. (Continued)</u>							
168	125	14	13,689	4	0.210	0.225	34.8
169	125	11	13,689	14	0.210	0.237	28.6
170	142	13	13,689	14	0.210	0.216	32.7
171	125	12	13,689	10	0.265	0.255	39.7
172	155	14	13,689	10	0.265	0.275	44.7
173	130	12	13,689	10	0.265	0.261	37.0
174	134	12	13,689	10	0.265	0.262	38.7
175	140	13	13,689	10	0.265	0.265	40.4
176	134	12	13,689	7	0.360	0.317	48.2
177	132	12	13,689	7	0.360	0.318	47.1
<u>MC4, 6x6 Truck, 2-1/2-Ton, Suscinio, France</u>							
178	78	7	8,533	14	0.130	0.159	17.5
179	92	8	8,533	14	0.132	0.154	20.9
180	51	5	8,533	10	0.147	0.157	12.8
181	70	6	8,533	10	0.147	0.151	17.2
182	92	8	8,533	10	0.147	0.144	23.3
183	94	8	8,533	7	0.176	0.220	27.9
184	54	6	8,533	7	0.176	0.219	18.9
185	55	5	8,533	7	0.176	0.197	16.2
<u>MC5, 6x6 Truck, 2-1/2-Ton, Fortville, France</u>							
186	66	6	12,444	7	0.250	0.255	19.6
187	125	11	12,444	7	0.250	0.283	37.5
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, La Turballe, France</u>							
188	103	9	10,899	10	0.203	0.249	26.8
189	141	9	10,899	10	0.203	0.293	37.0
190	96	8	10,899	7	0.252	0.316	28.3
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, Suscinio, France</u>							
191	143	13	14,578	21	0.171	0.215	23.8
192	133	12	14,578	21	0.171	0.159	21.8
193	105	9	14,578	21	0.171	0.190	17.3
194	106	9	14,578	21	0.171	0.194	17.3
195	133	12	14,578	21	0.171	0.194	21.8
196	140	13	14,578	21	0.171	0.202	23.2
197	107	10	14,578	14	0.225	0.263	23.5
198	67	6	14,578	14	0.225	0.193	14.9
199	95	9	14,578	14	0.225	0.216	20.9
200	67	6	14,578	14	0.225	0.238	14.3
201	92	8	14,578	14	0.225	0.188	21.1
202	104	6	14,578	14	0.225	0.191	22.8
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, La Turballe, France</u>							
203	80	7	14,578	14	0.225	0.212	17.6
204	143	13	14,578	14	0.225	0.195	31.3
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, Suscinio, France</u>							
205	60	6	14,578	10	0.277	0.193	15.7
206	61	5	14,578	10	0.277	0.200	16.0
207	63	6	14,578	10	0.277	0.230	18.4
208	69	6	14,578	10	0.277	0.234	18.4
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, La Turballe, France</u>							
209	95	9	14,578	10	0.277	0.289	25.7
210	96	9	14,578	10	0.277	0.261	25.7
211	86	8	14,578	10	0.277	0.262	23.2
212	78	7	14,578	7	0.348	0.305	20.8
213	117	11	14,578	7	0.348	0.328	31.3
214	86	8	14,578	7	0.348	0.322	23.2
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, Cape Cod, Mass.</u>							
221	185	17	11,333	14	0.176	0.244	40.3
222	159	14	11,333	14	0.176	0.227	34.7
223	172	15	11,333	14	0.176	0.262	37.1
224	90	5	11,333	14	0.176	0.078	12.1
225	49	5	11,333	14	0.176	0.095	11.0
226	60	5	11,333	14	0.176	0.090	13.4
227	172	15	11,333	10	0.216	0.312	45.0

(Continued)

(2 of 4 sheets)



Table 11 (Cont. prev)

Test No.	Cone Index 0-15 cm	Penetration- Resistance Gradient $\frac{V}{S/cm^2/cm}$	Miscel Load N ( $\psi$ )	Inflation Pressure N/cm <sup>2</sup>	Deflection mm	P N	Sand Mobility Number	
							$\frac{G'bd}{U}$	$\frac{b}{B}$
<u>DUM 353, 6x6 Truck, 2-1/2-Ton, Cape Cod, Mass. (Continued)</u>								
228	182	17	11,333	10	0.216	0.277		48.5
229	142	13	11,333	10	0.216	0.293		38.1
230	46	-	11,333	10	0.216	0.118		12.1
231	41	-	11,333	10	0.216	0.105		11.3
232	40	4	11,333	10	0.216	0.108		10.6
233	162	15	11,333	7	0.262	0.370		54.8
234	160	14	11,333	7	0.262	0.337		52.2
235	129	12	11,333	7	0.262	0.340		42.0
236	40	4	11,333	7	0.262	0.214		13.4
237	39	4	11,333	7	0.262	0.213		13.0
238	44	4	11,333	7	0.262	0.191		14.7
<u>M41, 6x6 Truck, 5-Ton, Vicksburg, Miss., Miss. River Sandbar</u>								
240	97	9	17,155	21	0.172	0.169		28.5
241	76	7	17,155	21	0.172	0.165		22.3
242	340	31	17,155	21	0.172	0.330		100.0
243	305	28	17,155	14	0.153	0.397		96.5
251	99	9	17,155	10	0.258	0.283		44.1
253	360	33	17,155	10	0.258	0.441		161.0
258	360	33	17,155	7	0.316	0.479		197.0
<u>Docket Loader, 4x4 Tractor, Vicksburg, Miss., Miss. River Sandbar</u>								
285	122	11	15,111	21	0.104	0.201		25.8
286	128	12	15,111	21	0.104	0.203		27.1
287	125	11	15,111	21	0.104	0.202		26.6
288	112	10	15,111	21	0.104	0.192		23.7
289	125	11	15,111	14	0.141	0.252		35.0
290	120	11	15,111	14	0.141	0.238		34.3
291	124	11	15,111	10	0.173	0.300		42.8
292	121	11	15,111	10	0.173	0.303		41.9
293	117	11	15,111	10	0.173	0.299		41.0
294	109	10	15,111	7	0.233	0.340		51.0
295	123	11	15,111	7	0.233	0.355		58.2
<u>Turnadozer, 4x4 Tractor, Vicksburg, Miss., Miss. River Sandbar</u>								
296	103	9	34,489	21	0.178	0.216		42.3
297	130	12	34,489	21	0.178	0.233		53.4
298	115	10	34,489	21	0.178	0.215		47.6
299	147	13	34,489	21	0.178	0.235		60.7
300	141	13	34,489	21	0.178	0.216		58.0
301	136	12	34,489	14	0.208	0.283		66.0
302	138	12	34,489	14	0.208	0.272		66.7
303	136	12	34,489	14	0.208	0.302		66.0
304	136	12	34,489	14	0.208	0.261		66.0
305	122	11	34,489	14	0.208	0.287		58.4
306	136	12	34,489	14	0.208	0.281		66.0
307	136	12	34,489	14	0.208	0.272		66.7
308	125	11	34,489	10	0.250	0.235		73.8
309	114	11	34,489	10	0.250	0.327		75.0
310	139	12	34,489	10	0.250	0.339		81.5
311	135	12	34,489	10	0.250	0.327		75.3
312	130	12	34,489	10	0.250	0.316		74.7
313	124	11	34,489	10	0.250	0.338		73.1
314	134	12	34,489	10	0.250	0.332		74.1
315	133	12	34,489	10	0.250	0.338		74.0
316	116	11	34,489	7	0.272	0.397		74.5
317	137	12	34,489	7	0.272	0.402		77.5
318	116	11	34,489	7	0.272	0.389		74.5
319	138	12	34,489	7	0.272	0.412		83.5
320	133	12	34,489	7	0.272	0.399		81.5
<u>Q282, 4x4 Cargo Carrier, 5-Ton (10-26), Vicksburg, Miss., Miss. River Sandbar</u>								
321	143	13	29,644	21	0.172	0.278		48.8
322	113	10	29,644	21	0.172	0.254		36.8
323	119	11	29,644	21	0.172	0.241		40.5
324	132	12	29,644	21	0.172	0.274		45.2
325	140	13	29,644	21	0.172	0.351		47.8
326	143	13	29,644	21	0.172	0.267		48.8
327	126	11	29,644	21	0.172	0.268		43.4
328	51	14	29,644	14	0.215	0.335		65.2
329	151	14	29,644	14	0.215	0.345		69.2
330	136	12	29,644	14	0.215	0.305		59.1
331	126	11	29,644	14	0.215	0.320		54.2
332	134	12	29,644	14	0.215	0.327		57.9
333	135	12	29,644	14	0.215	0.325		58.5

(Continued)

(3 of 4 sheets)


Table 11 (Continued)

Test No.	Cone Index 0-15 cm	Penetration- Resistance Gradient	Wheel Load W (lb)	Inflation Pressure w/cm <sup>2</sup>	Deflection S/h	P W	S of Mobility Number $\frac{S(h)}{W}^{3/2}$ , $\frac{S}{h}$
		$\frac{N}{cm^2}, cm$					
<u>QOER, 4x4 Cargo Carrier, 5-Ton (18-26), Vicksburg, Miss., Miss. River Sandbar (Continued)</u>							
334	157	14	29,644	14	0.215	0.380	67.6
335	146	13	29,644	10	0.247	0.368	71.9
336	136	12	29,644	10	0.247	0.400	66.9
337	142	13	29,644	10	0.247	0.374	69.7
338	147	13	29,644	10	0.247	0.366	71.9
339	144	13	29,644	10	0.247	0.366	70.7
340	126	11	29,644	7	0.294	0.431	74.2
341	145	13	29,644	7	0.294	0.447	85.7
342	141	13	29,644	7	0.294	0.444	83.2
343	149	14	29,644	7	0.294	0.428	87.4
<u>QOER, 4x4 Cargo Carrier, 5-Ton (15-34), Vicksburg, Miss., Miss. River Sandbar</u>							
344	135	12	29,644	21	0.217	0.240	50.9
345	132	12	29,644	21	0.217	0.250	59.0
346	144	13	29,644	21	0.217	0.241	59.6
347	142	13	29,644	21	0.217	0.242	63.8
348	144	13	29,644	21	0.217	0.235	62.6
349	130	12	29,644	21	0.217	0.299	62.8
350	136	12	29,644	14	0.242	0.312	63.3
351	130	12	29,644	14	0.242	0.309	65.8
352	130	12	29,644	14	0.242	0.311	63.3
353	123	11	29,644	14	0.242	0.308	60.1
354	130	12	29,644	14	0.242	0.306	63.3
355	130	12	29,644	14	0.242	0.300	63.3
356	129	12	29,644	14	0.242	0.303	62.6
357	145	13	29,644	14	0.242	0.356	70.9
358	143	13	29,644	10	0.296	0.346	86.4
359	134	12	29,644	10	0.296	0.344	81.2
360	146	13	29,644	10	0.296	0.359	89.8
361	141	12	29,644	10	0.296	0.350	85.7
362	141	12	29,644	10	0.296	0.347	85.5
363	136	12	29,644	10	0.296	0.349	82.1
364	139	12	29,644	10	0.296	0.348	83.7
365	151	14	29,644	7	0.428	0.427	121.4
366	146	13	29,644	7	0.428	0.425	127.3
367	139	12	29,644	7	0.428	0.409	121.0
368	129	12	29,644	7	0.428	0.411	122.5
369	126	11	29,644	7	0.428	0.390	122.0


7-10-61  
Special Tests of Quartermaster Corps. Field Tests,  
Gravel Test Road

Test No.	Coax. Index 0-100, mm	Perforation Number 1-10	Wheel Load N kg	Inflation Pressure N/cm <sup>2</sup> psi	Deflection mm	$\frac{P_{100}}{W}$	Load Mobility Number $\frac{2.54}{\mu}$
<u>M37, 6x6 Truck, 2-1/2-Ton, Padre Island, Tex.</u>							
1	350	10	7,955	21	0.11	0.020	44.3
2	359	13	7,955	14	0.11	0.041	66.9
3	372	14	7,955	10	0.11	0.023	32.6
4	309	26	7,955	7	0.11	0.041	28.3
5	141	43	7,955	44	0.11	0.125	49.2
6	176	15	7,955	49	0.11	0.076	31.0
7	174	16	7,955	10	0.11	0.043	35.6
8	154	14	7,955	7	0.11	0.051	46.7
<u>M35, 6x6 Truck, 2-1/2-Ton, Padre Island, Tex.</u>							
9	82	7	10,933	21	0.120	0.164	13.2
10	128	14	10,933	14	0.126	0.086	39.0
11	109	10	10,933	10	0.125	0.171	38.0
12	95	7	10,933	7	0.120	0.061	26.4
13	124	11	10,933	11	0.130	0.142	17.0
14	42	3	13,455	14	0.200	0.161	7.1
15	33	3	13,455	10	0.200	0.135	9.5
16	31	3	13,455	7	0.200	0.146	17.9
<u>M135, 6x6 Truck, 2-1/2-Ton, Vicksburg, Miss., Miss. River Sandbar</u>							
17	12	11	13,455	21	0.130	0.090	17.3
18	16	12	13,455	7	0.130	0.091	56.1
<u>M135, Tested as 4x4, Vicksburg, Miss., Miss. River Sandbar</u>							
19	127	11	19,555	21	0.233	0.093	22.1
20	130	9	19,555	14	0.231	0.061	21.1
21	112	10	19,555	10	0.248	0.080	29.2
22	95	9	19,555	21	0.228	0.073	14.4
23	103	9	19,555	14	0.235	0.066	22.7
24	102	9	19,555	10	0.248	0.054	26.6
<u>JOEM 353, 6x6 Truck, 2-1/2-Ton, Cape Cod, Mass.</u>							
25	137	12	11,333	11	0.125	0.132	21.4
26	112	10	11,333	11	0.176	0.096	24.2
27	114	10	11,333	10	0.116	0.083	30.5
28	98	8	11,333	7	0.252	0.117	28.3
<u>M41, 6x6 Truck, 2-1/2-Ton, Padre Island, Tex.</u>							
29	41	4	17,155	21	0.144	0.203	8.4
30	24	2	17,155	14	0.194	0.160	8.3
31	23	2	17,155	10	0.234	0.119	9.3
32	30	3	17,155	7	0.316	0.125	16.4
33	75	5	21,244	21	0.172	0.145	15.5
34	106	17	21,244	14	0.210	0.060	54.3
35	107	27	21,244	10	0.300	0.025	128.6
36	164	15	21,244	7	0.375	0.055	79.0
<u>Packet Loader, 4x4 Tractor, Vicksburg, Miss., Miss. River Sandbar</u>							
47	135	12	15,111	21	0.104	0.059	28.3
49	117	11	15,111	14	0.141	0.051	24.7
50	117	11	15,111	10	0.173	0.060	30.3
51	111	10	15,111	7	0.263	0.078	52.2
<u>Journalizer, 4x4 Tractor, Vicksburg, Miss., Miss. River Sandbar</u>							
52	28	12	34,489	21	0.178	0.085	53.4
53	10	12	34,489	14	0.208	0.069	62.4
54	34	12	34,489	10	0.250	0.072	78.4
55	126	11	34,489	7	0.272	0.055	79.8
<u>JOER, 4x4 Cargo Carrier, 5-Ton (15-34), Vicksburg, Miss., Miss. River Sandbar</u>							
56	126	11	29,644	21	0.172	0.055	43.1
57	125	12	29,644	14	0.215	0.056	57.7
58	143	13	29,644	10	0.247	0.052	70.7
59	--	--	--	7	--	--	--
<u>JOER, 4x4 Cargo Carrier, 5-Ton (15-34), Vicksburg, Miss., Miss. River Sandbar</u>							
60	124	13	29,644	21	0.217	0.056	63.4
61	149	12	29,644	14	0.242	0.059	63.3
62	139	12	29,644	10	0.296	0.05	82.8
63	--	--	--	7	--	--	--





\* Values taken directly from TM 3-240, 17th Supplement.  
 $\frac{P_{100}}{W}$  represents the ratio of the total pull to vehicle weight.

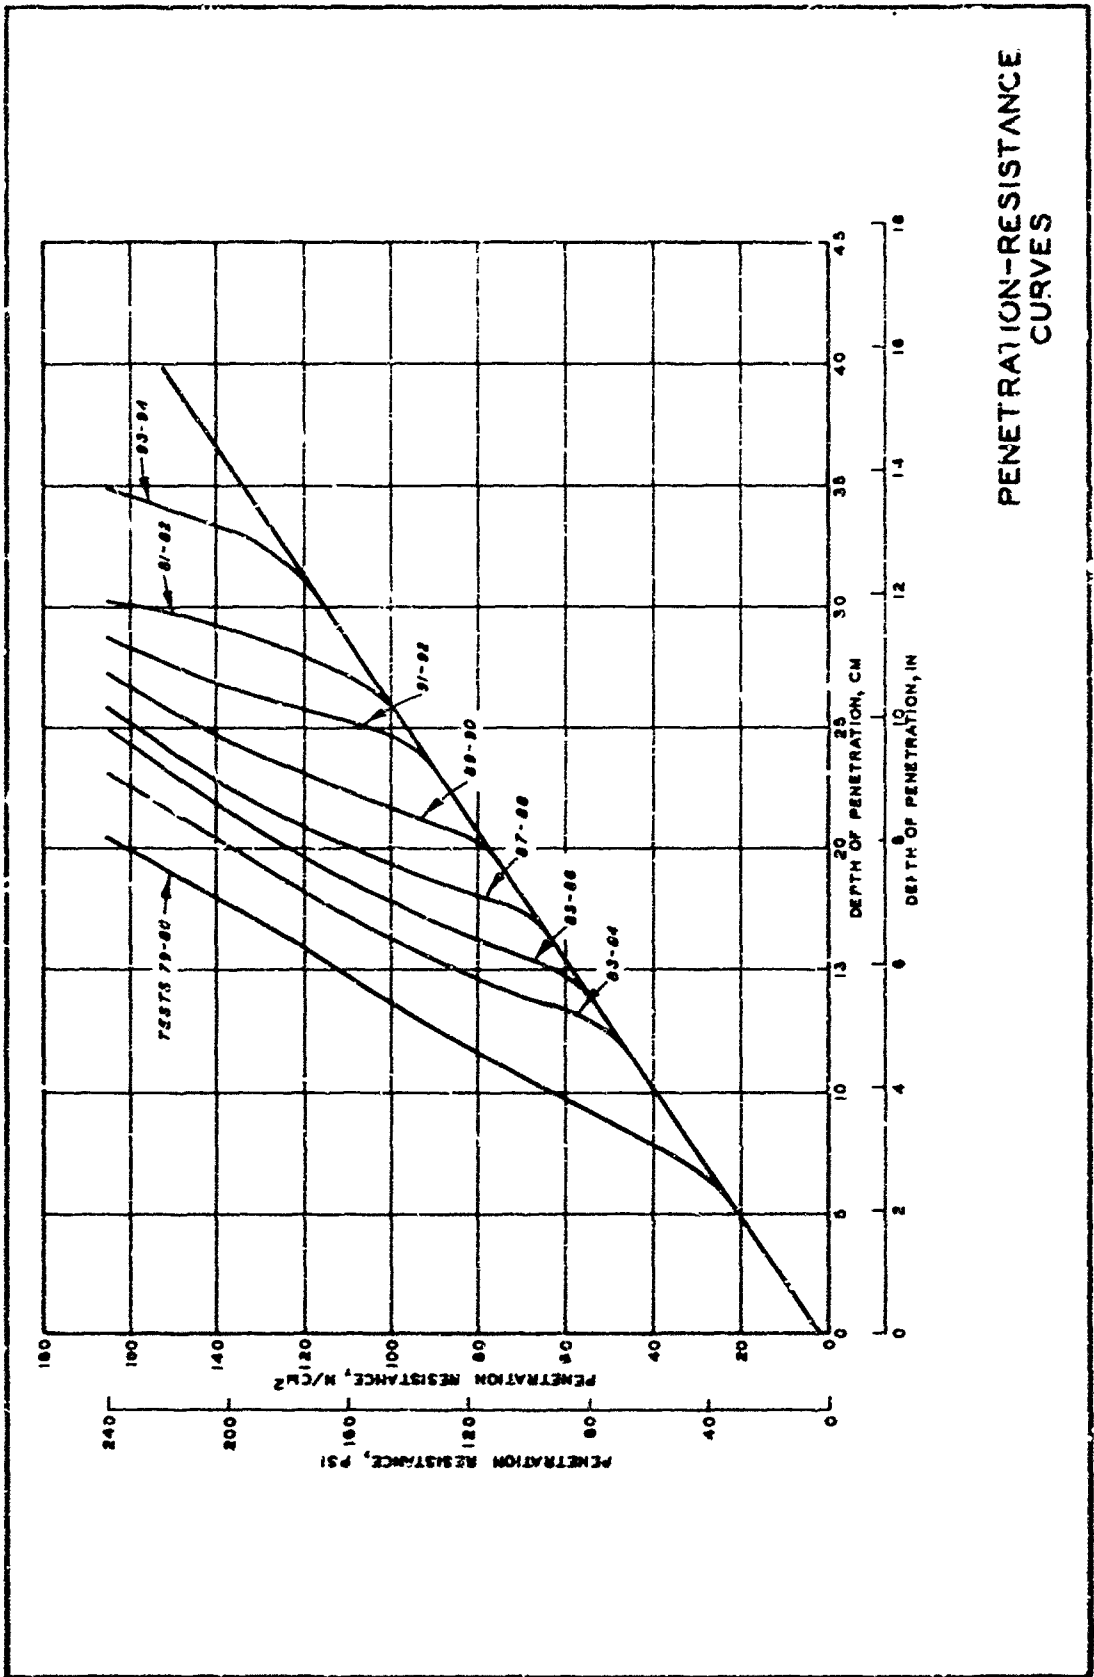





PENETRATION-RESISTANCE CURVES

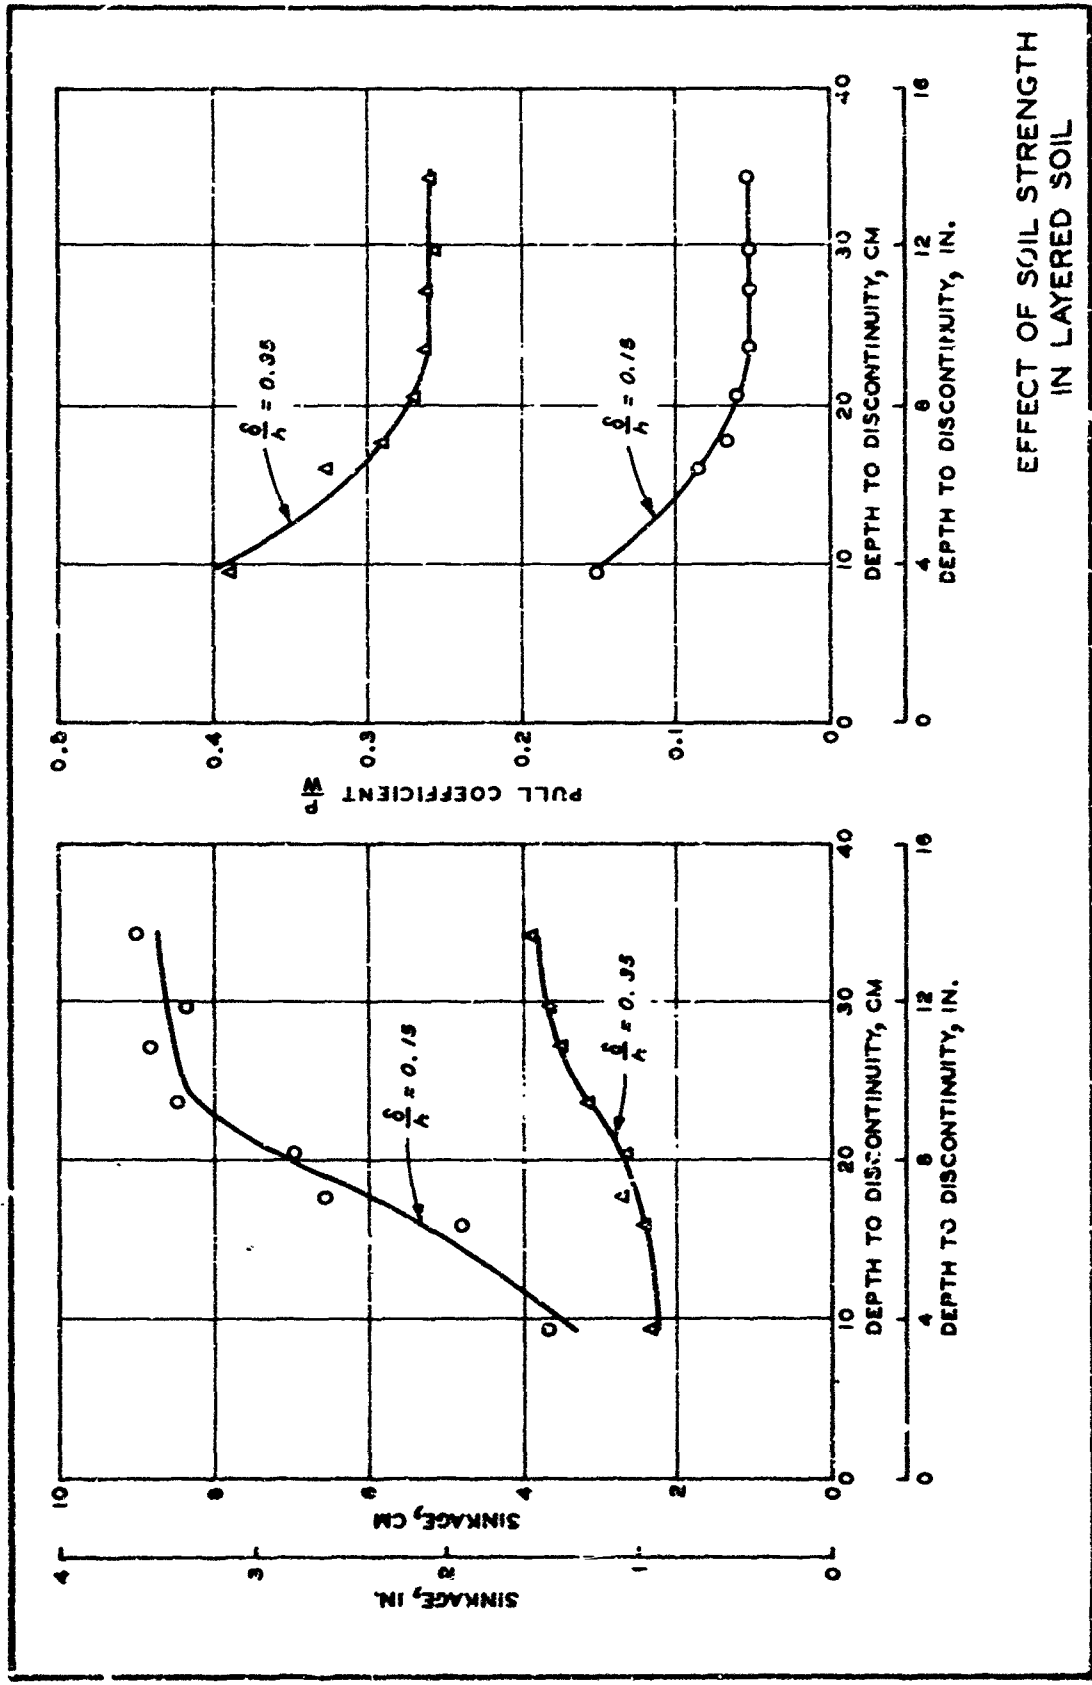





EFFECT OF SOIL STRENGTH  
IN LAYERED SOIL

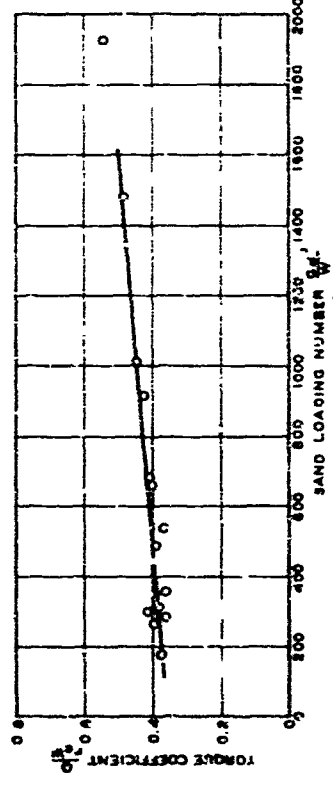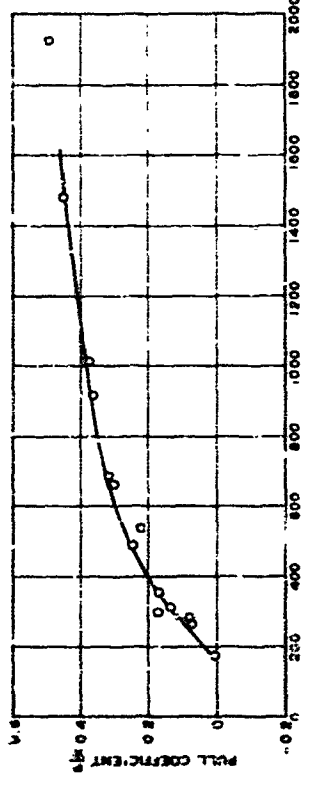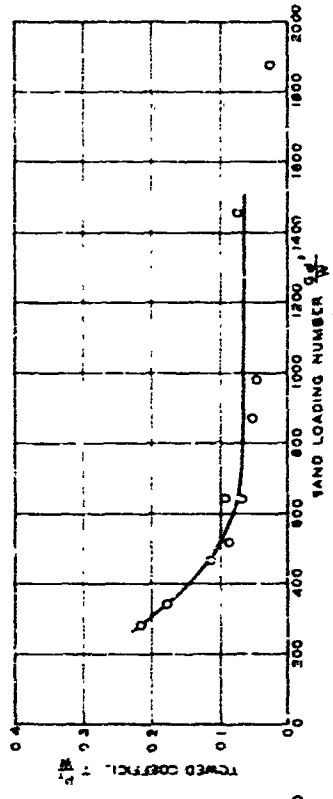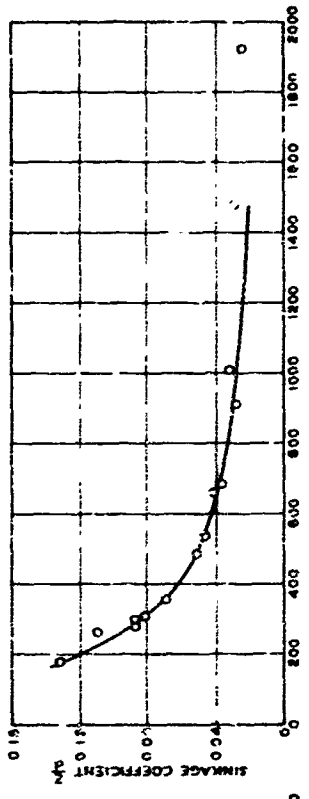

**EFFECT OF SOIL STRENGTH  
ON PERFORMANCE**  
 15% DEFLECTION  
 9.00-14.2-PR TIRE  
 1000 - TO 3950-N LOAD  
 G=1.5 TO 5.4

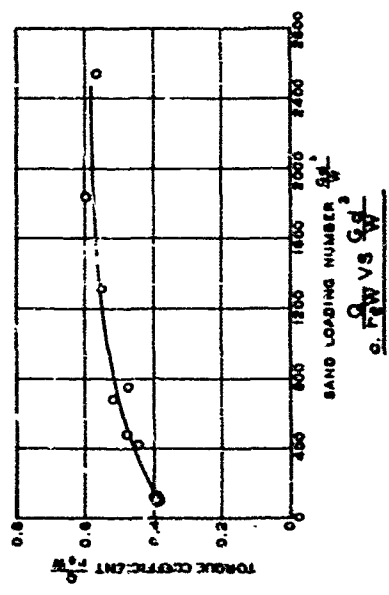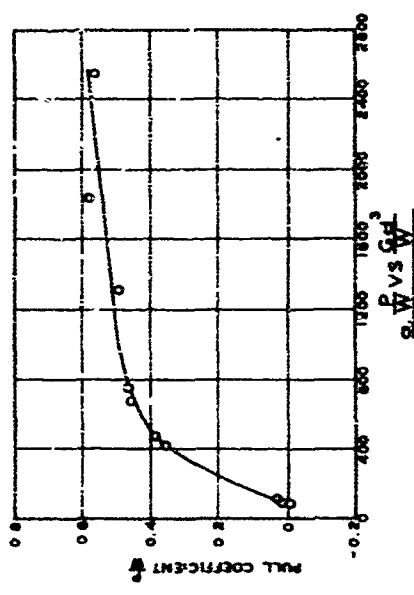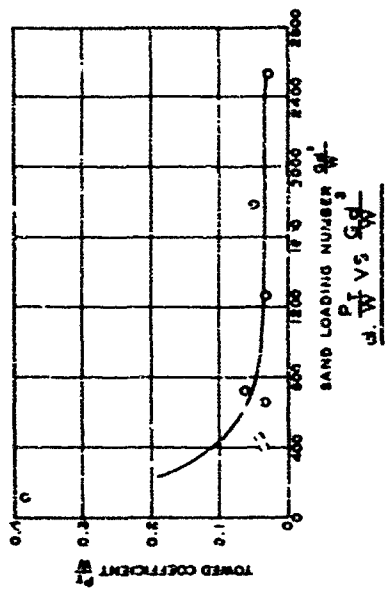
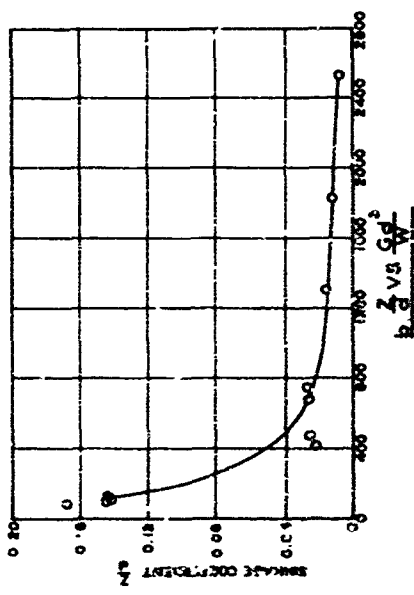


**EFFECT OF SOIL STRENGTH  
ON PERFORMANCE**  
 25% DEFLECTION  
 9.00-14.2-PR TIRE  
 1000-TO 3950-N LOAD  
 G=0.7 TO 6.6

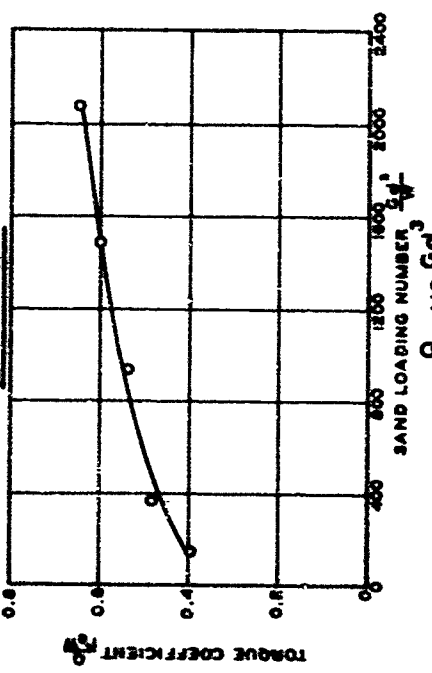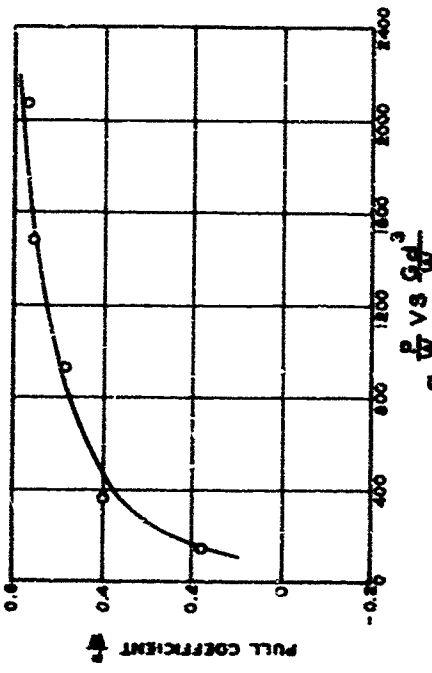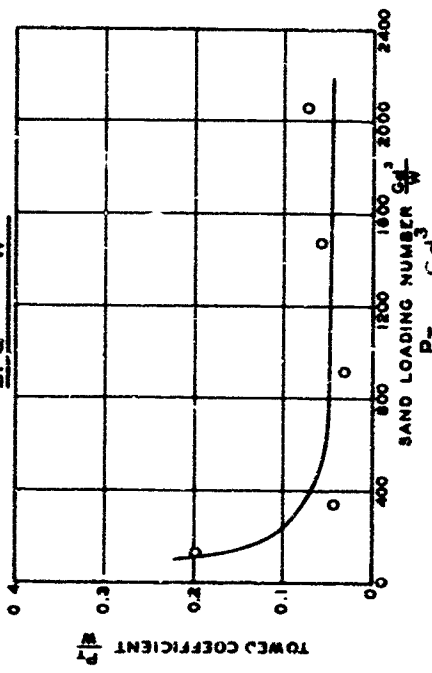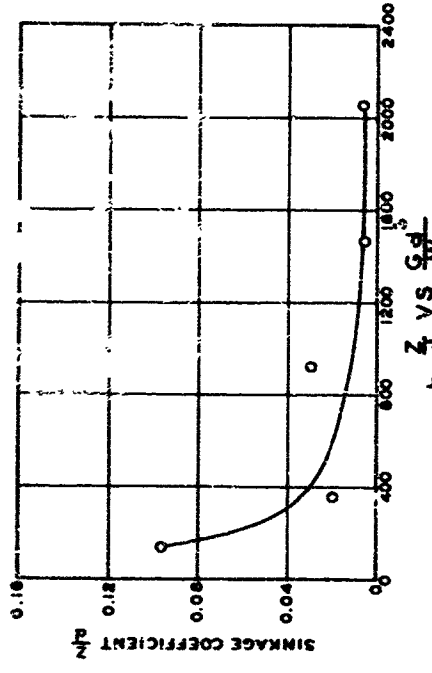

EFFECT OF SOIL STRENGTH  
ON PERFORMANCE  
35% DEFLECTION  
9.00-14, 2-PR TIRE, 1000-TO 3950-N LOAD  
 $G = 1.1$  TO  $6.1$







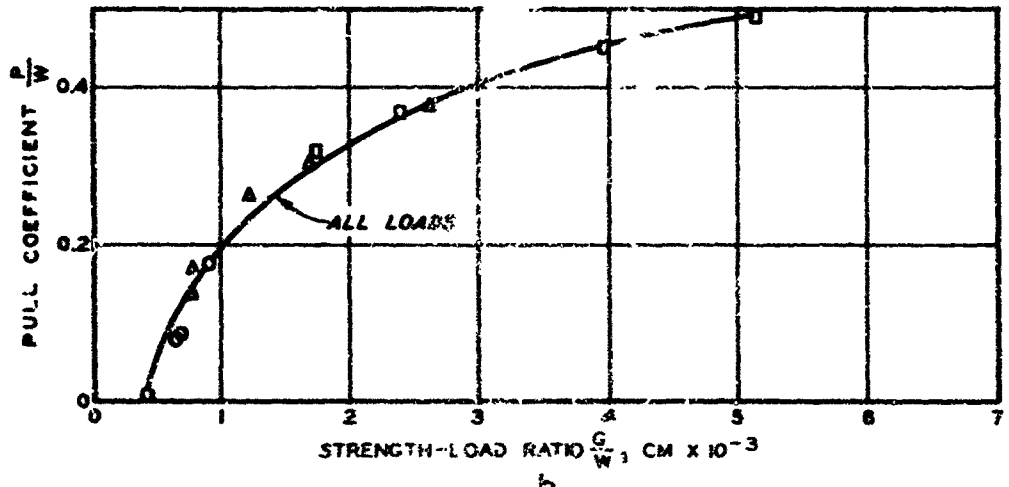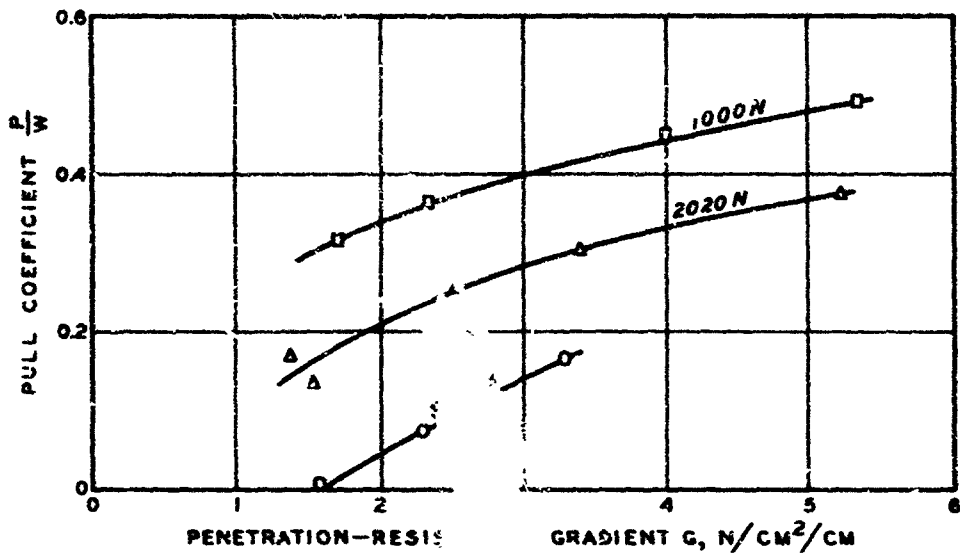

**LEGEND**

- 1000 N
- △ 2020 N
- 3950 N

**EFFECT OF LOAD  
ON PERFORMANCE**  
 9.00-14, 2-PR TIRE  
 15% DEFLECTION  
 G = 1.5 TO 5.4

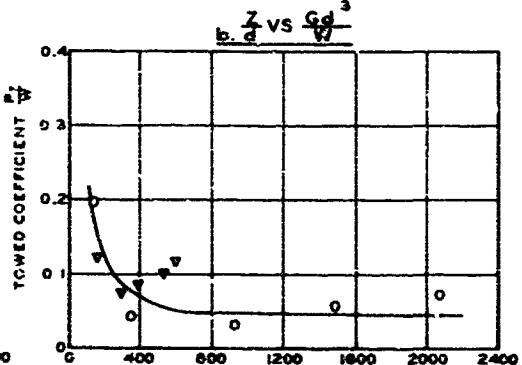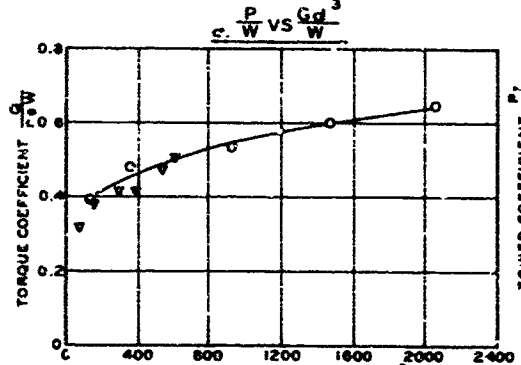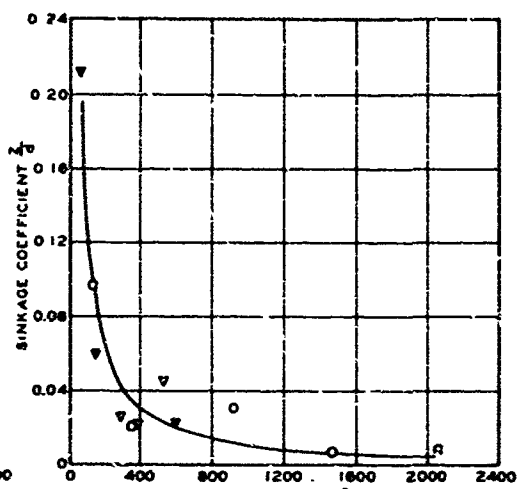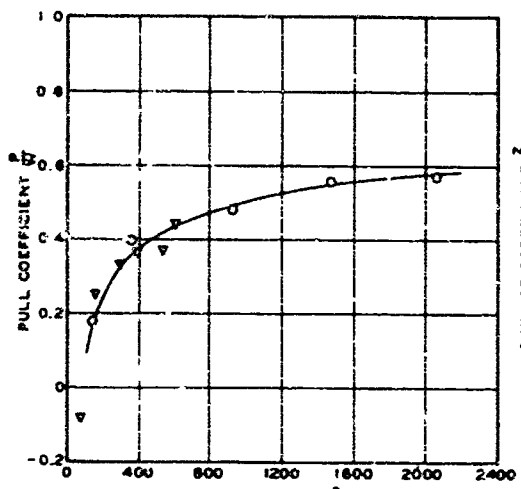

a.  $\frac{P}{W}$  VS  $\frac{Gd^3}{W}$


b.  $\frac{Z}{d}$  VS  $\frac{Gd^3}{W}$


c.  $\frac{Q}{PW}$  VS  $\frac{Gd^3}{W}$



d.  $\frac{P_T}{W}$  VS  $\frac{Gd^3}{W}$

**LEGEND**  
 O 8.00-14, 2-PR (PROTOTYPE)  
 ▽ 4.00-7.2-PR (MODEL)



**MODEL-PROTOTYPE  
 RELATIONS**  
 8.00-14, 2-PR AND  
 4.00-7, 2-PR TIRES  
 35% DEFLECTION  
 444- TO 3950-N LOAD  
 G=1.1 TO 6.3

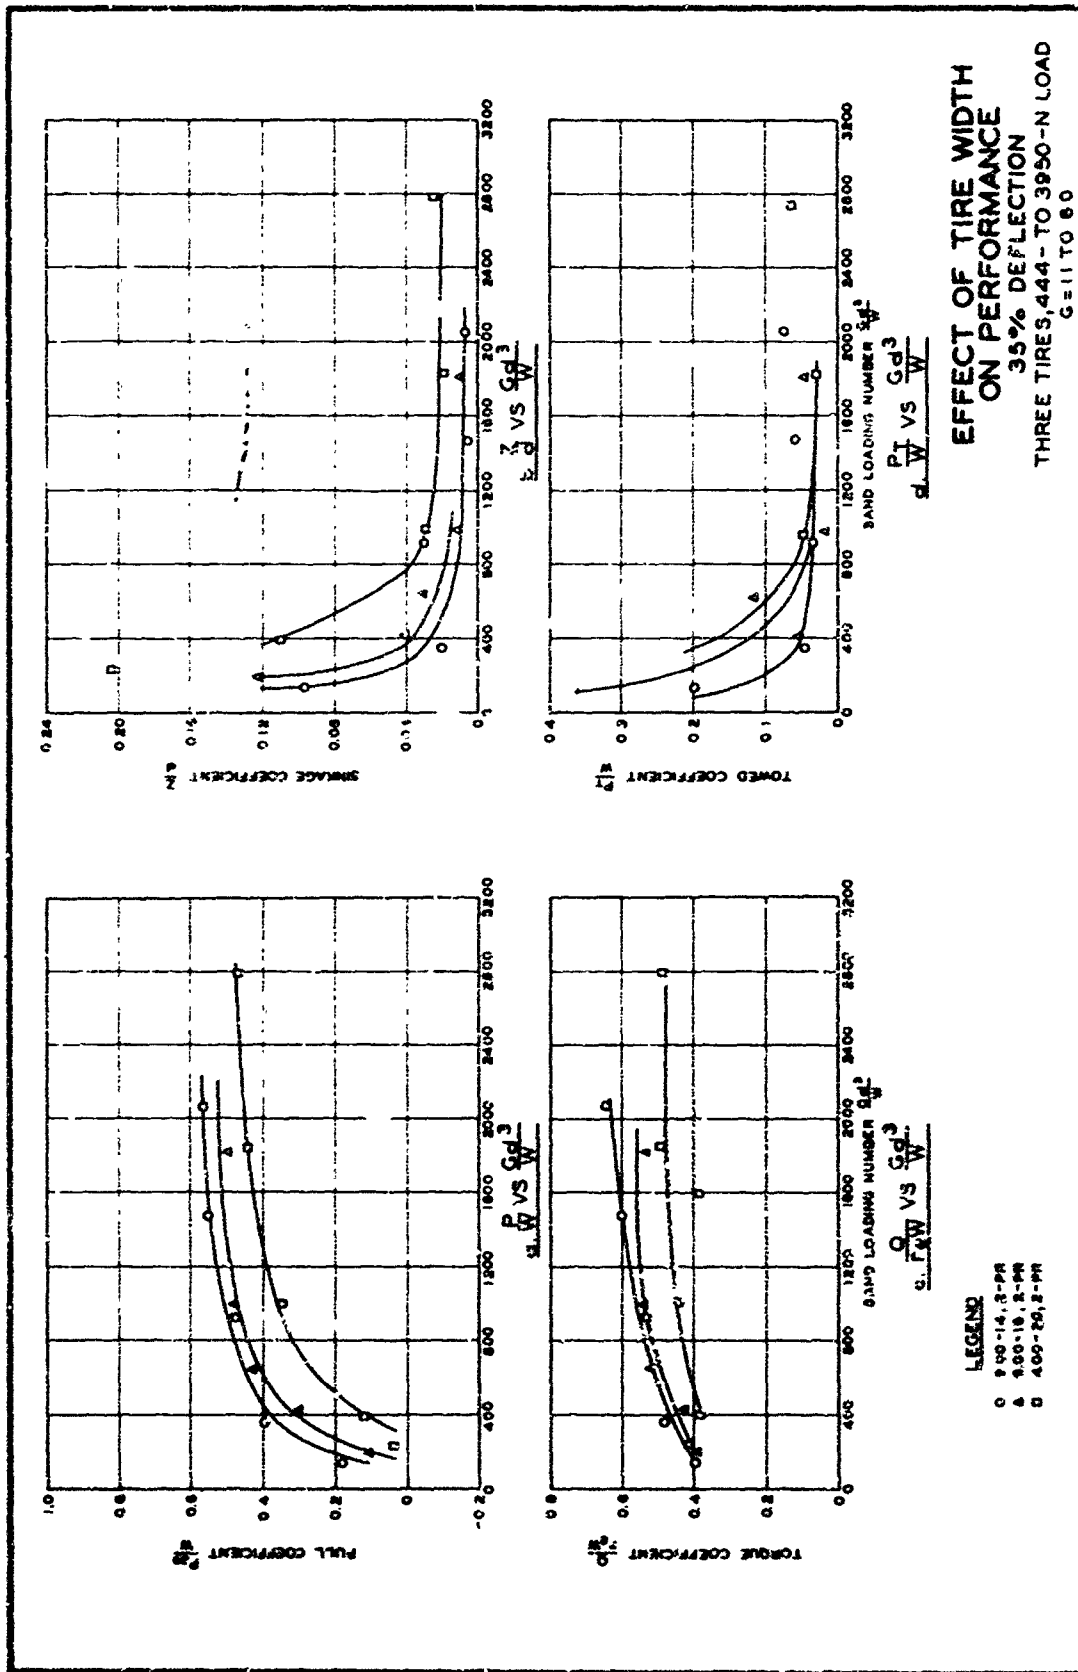

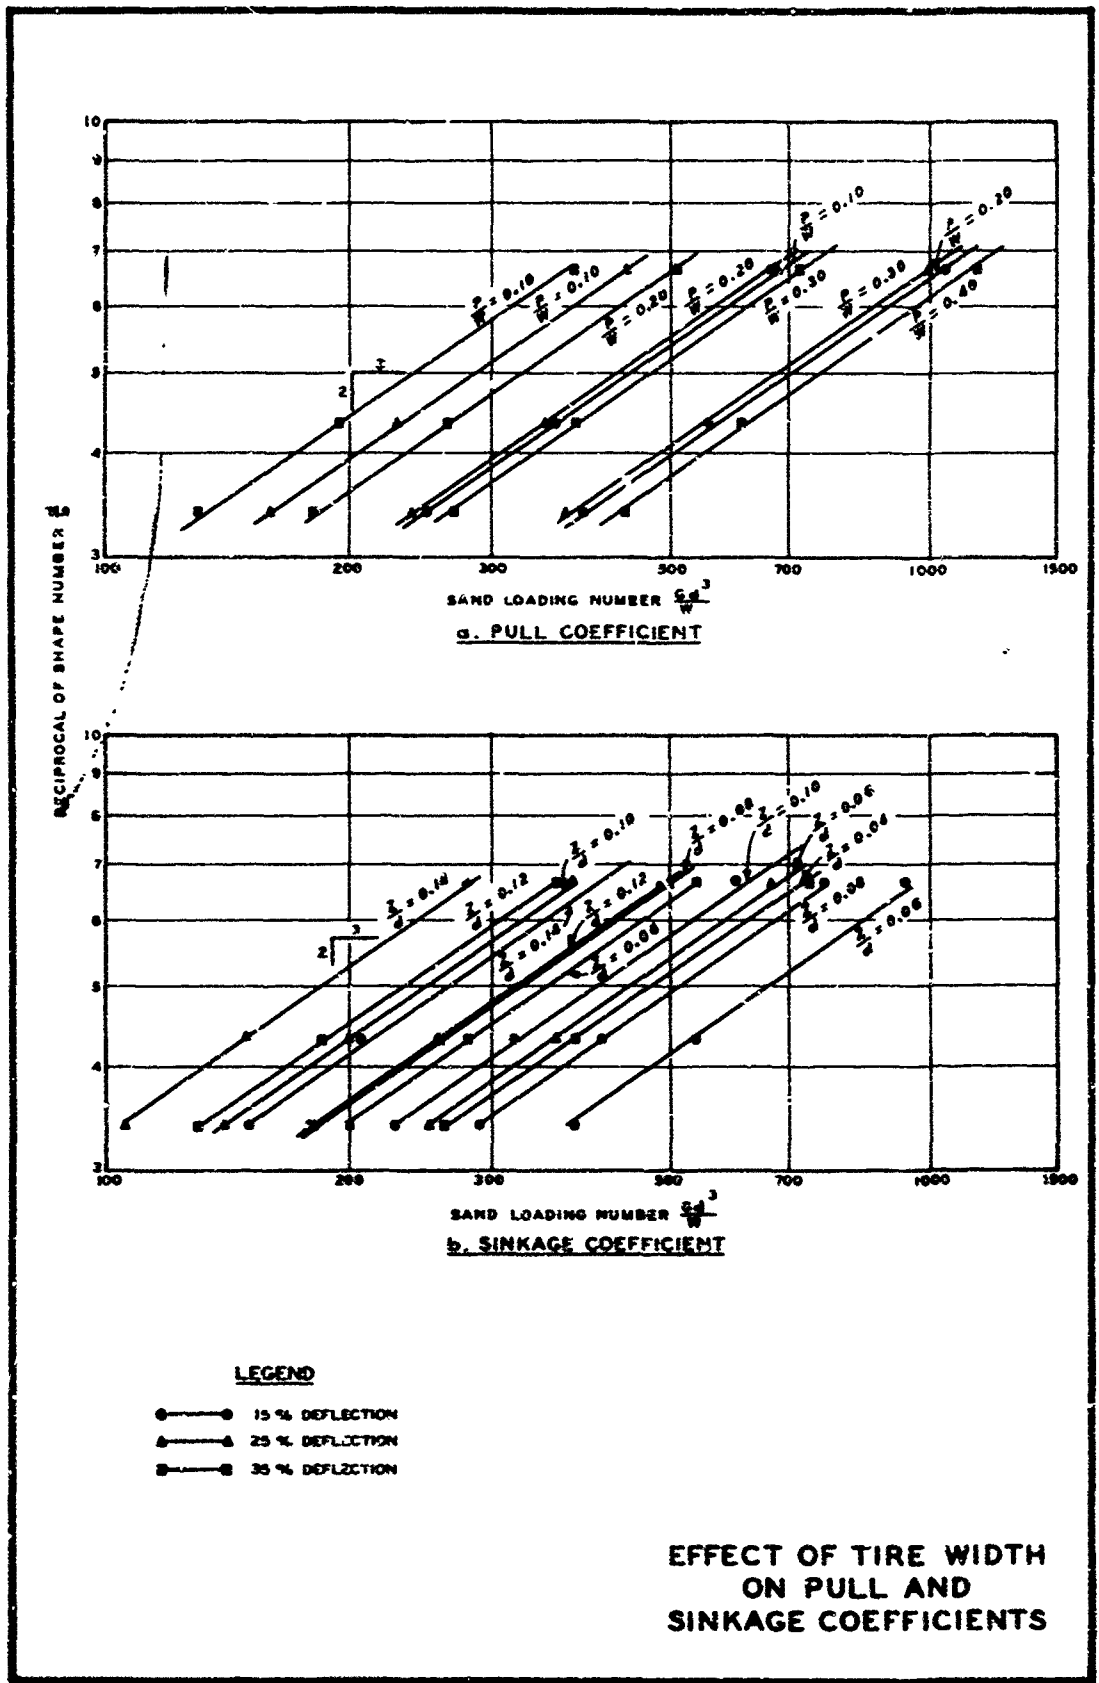


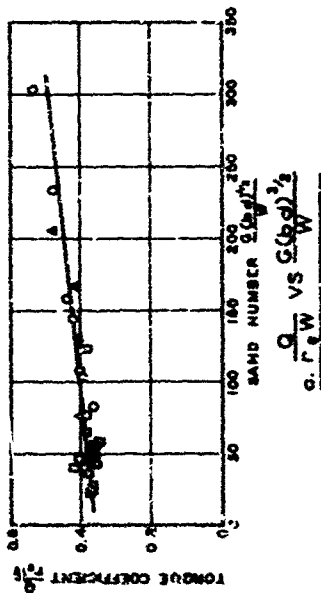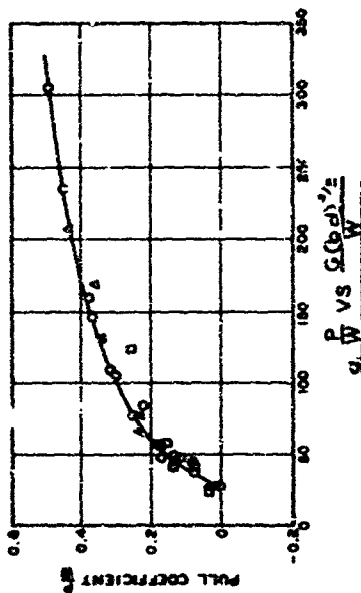


LEGEND  
 ○ 200-14.2-PR  
 △ 600-16.2-PR  
 □ 4.00-20.2-PR

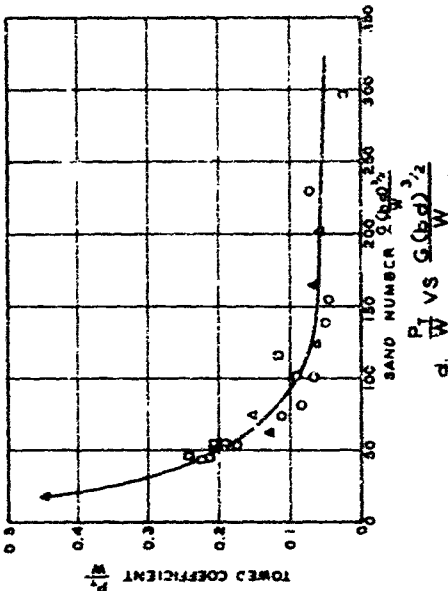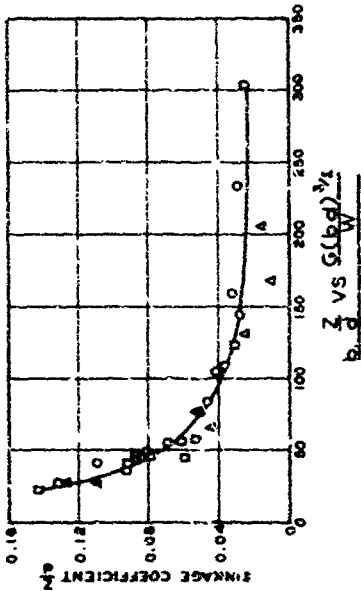


EFFECT OF TIRE WIDTH ON PERFORMANCE SHOWING COLLAPSE OF DATA USING SAND NUMBER  
 THREE TIRES, 15% DEFLECTION  
 444 - TO 3950-N LOAD  
 G=1.1 TO 8.6

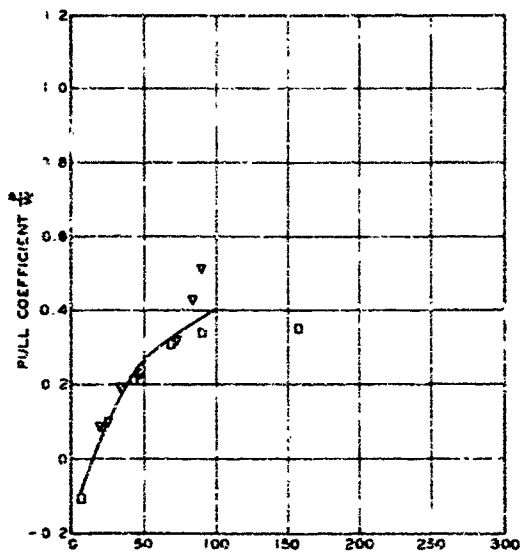


a.  $\frac{P}{W}$  VS  $\frac{G(bd)^{3/2}}{W}$

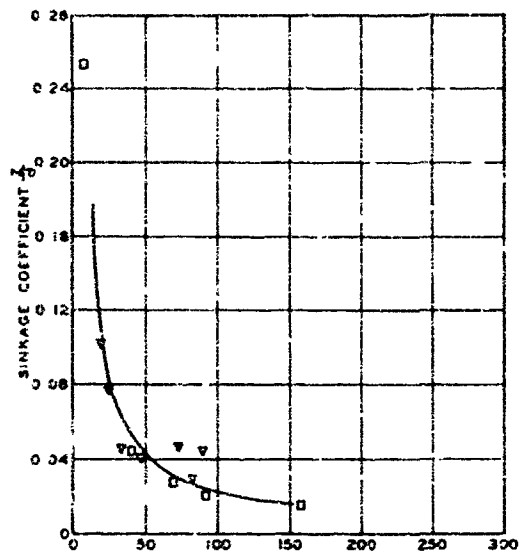

b.  $\frac{Z}{d}$  VS  $\frac{G(bd)^{3/2}}{W}$

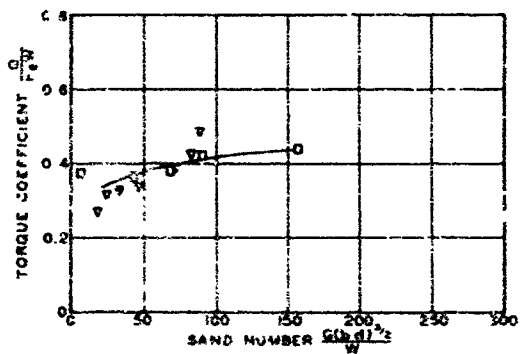

c.  $\frac{Q}{FW}$  VS  $\frac{G(bd)^{3/2}}{W}$

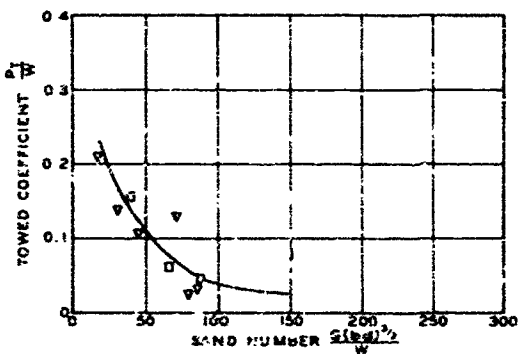


d.  $\frac{P_T}{W}$  VS  $\frac{G(bd)^{3/2}}{W}$


**LEGEND**

- 4.00-20, 2-PR
- ▽ 4.00-7, 2-PR


**EFFECT OF DIAMETER  
ON PERFORMANCE  
4.00-20, 2-PR AND  
4.00-7, 2-PR TIRES  
25% DEFLECTION  
444- TO 3950-N LOAD  
G=0.9 TO 8.3**

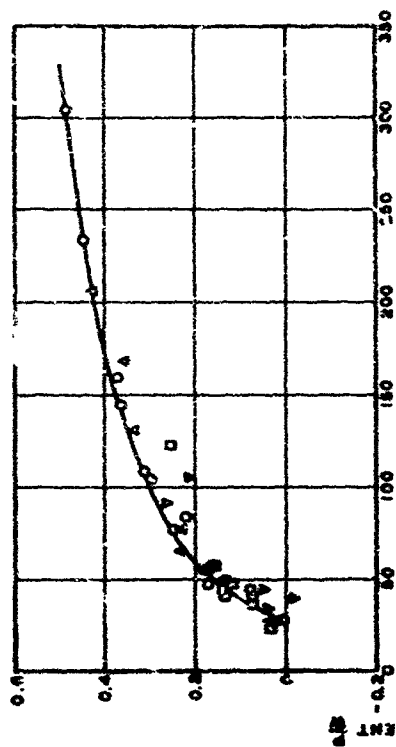

**0.15% DEFLECTION**

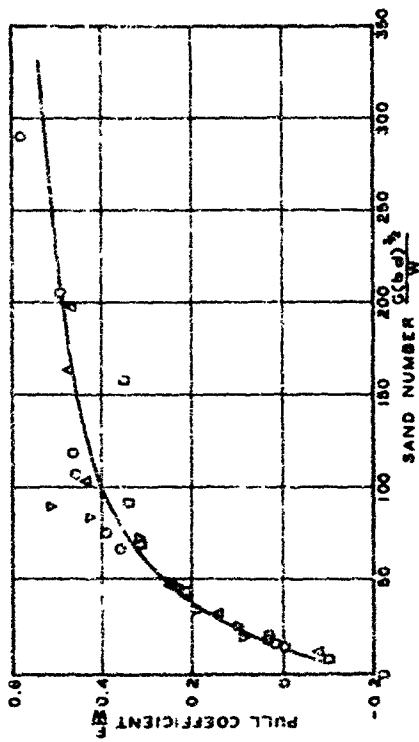




**0.25% DEFLECTION**

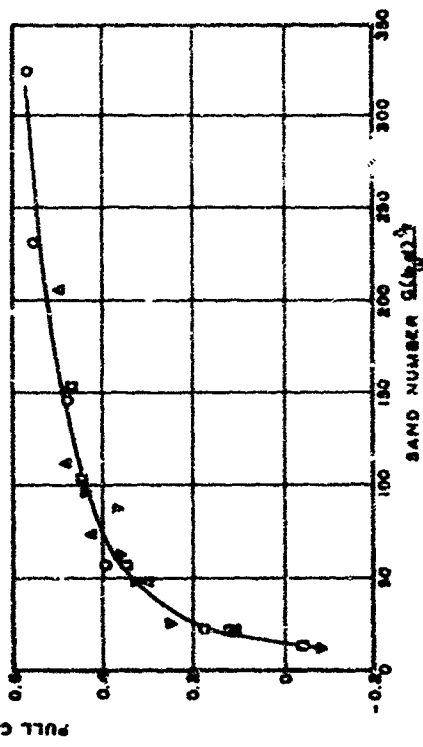

**0.35% DEFLECTION**

- LEGEND**
- O 8.00-14, 2-PR
  - A 8.00-18, 2-PR
  - D 4.00-20, 2-PR
  - V 4.00-7, 2-PR


**EFFECT OF TIRE DEFLECTION  
ON PERFORMANCE  
PULL COEFFICIENT VS  
SAND NUMBER  
FOUR TIRES, THREE DEFLECTIONS  
444 - TO 3950-N LOAD  
σ = 0.7 TO 0.3**

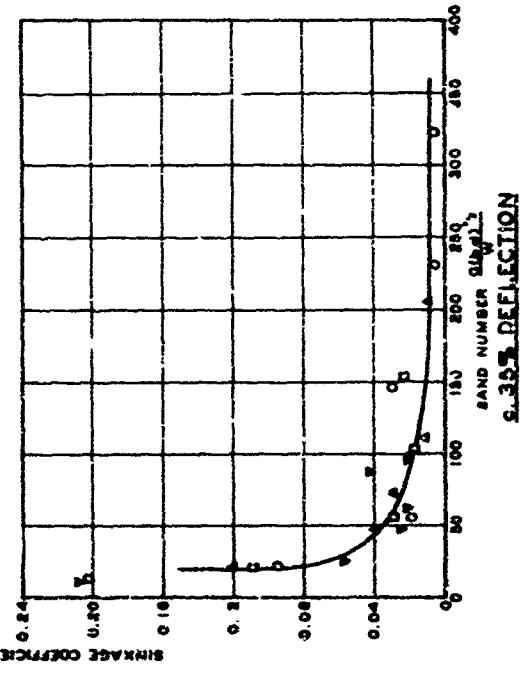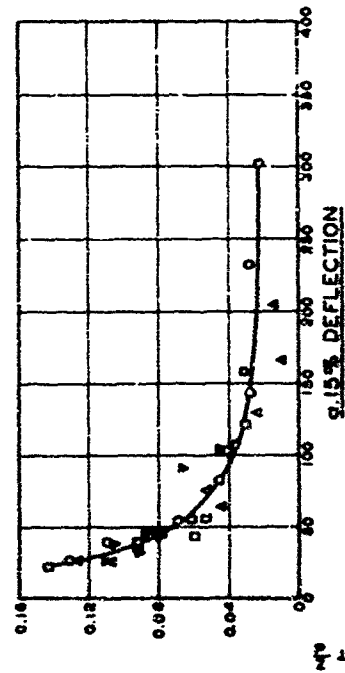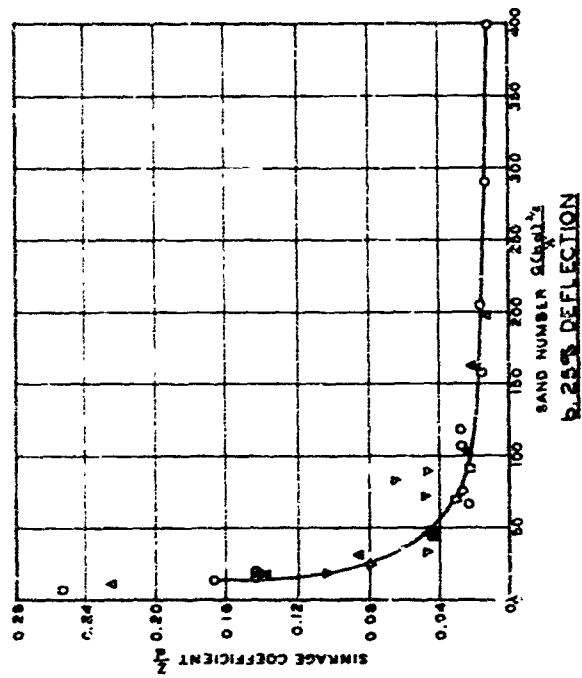


**LEGEND**  
 O 800-14.2-PR  
 A 800-16.5-PR  
 I 400-20.5-PR  
 V 400-17.2-PR

**EFFECT OF TIRE DEFLECTION ON PERFORMANCE, SINKAGE COEFFICIENT VS SAND NUMBER**  
 FOUR TIRES, THREE DEFLECTIONS  
 444-TO 3950-N LOAD  
 G=0.7 TO 0.3






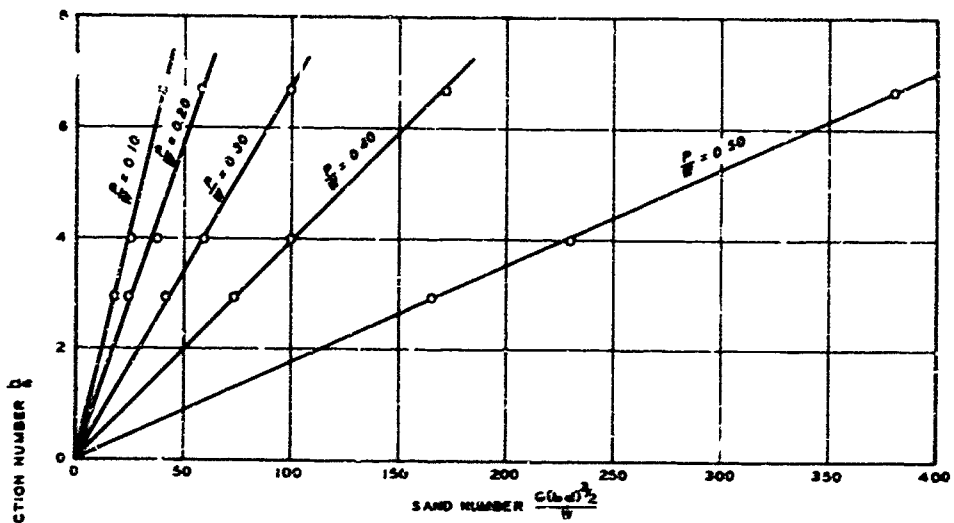


a. PULL COEFFICIENT

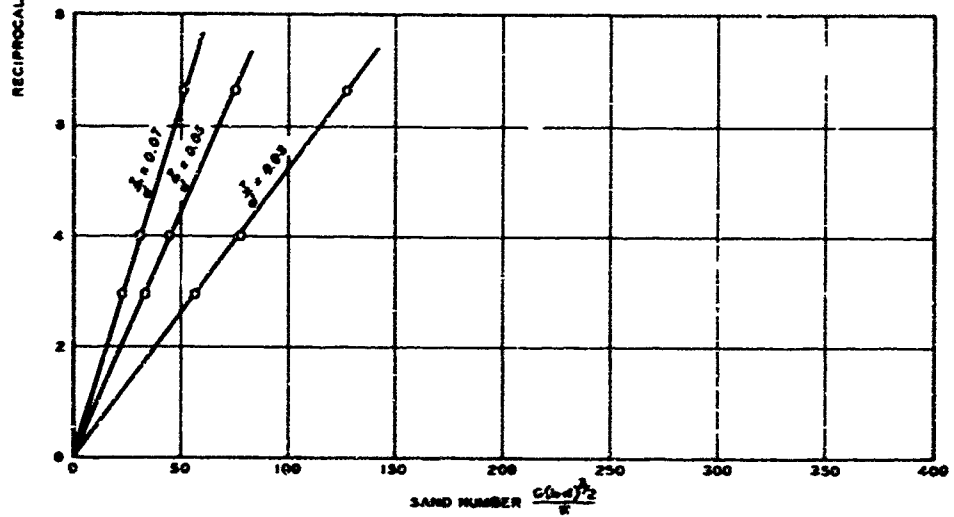

b. SINKAGE COEFFICIENT

SAND NUMBER VS  
 RECIPROCAL OF  
 DEFLECTION NUMBER  
 PULL AND  
 SINKAGE COEFFICIENTS

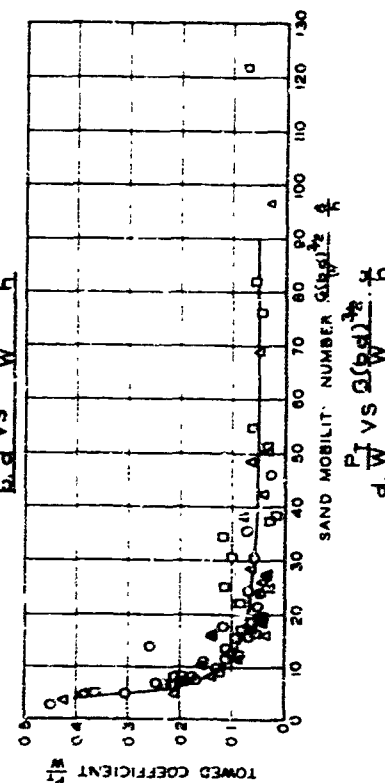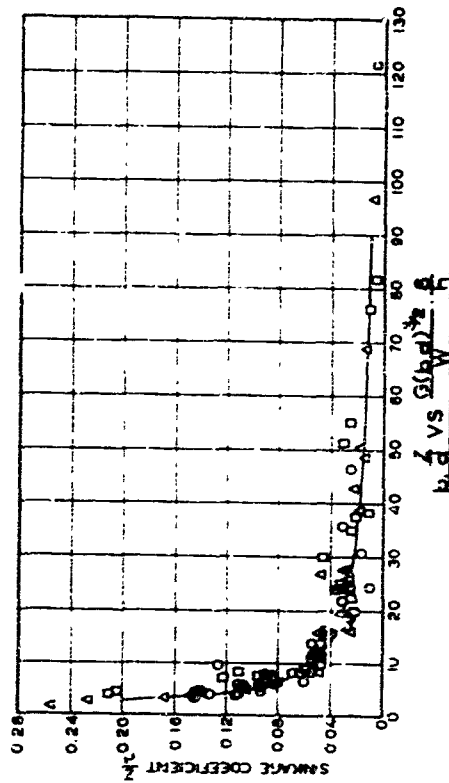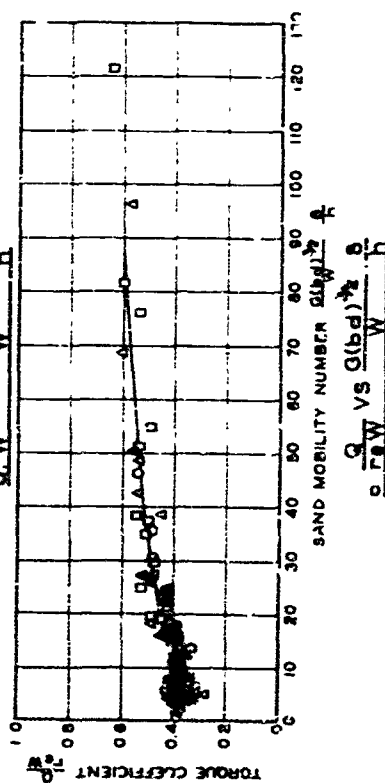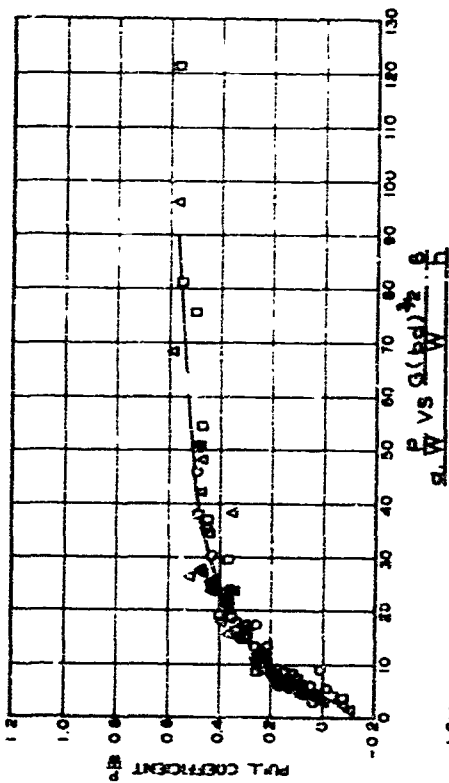



LEGEND

○  $\beta = 0.15$

△  $\beta = 0.25$

□  $\beta = 0.35$


RELATION OF PERFORMANCE  
COEFFICIENTS TO  
SAND MOBILITY NUMBER  
FOUR TIRES, THREE DEFLECTIONS  
444 - TO 3950-N LOAD  
G=0.7 TO 8.3

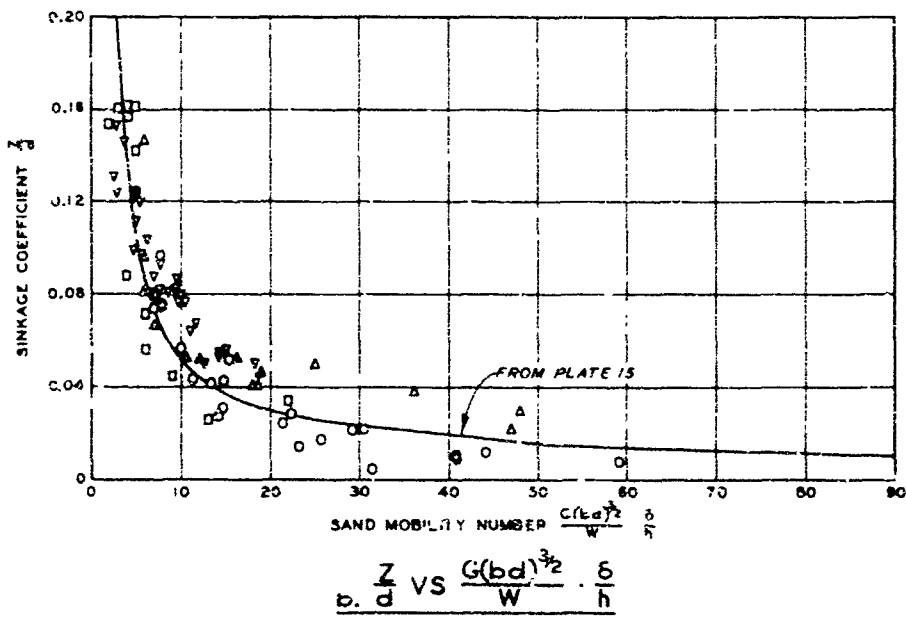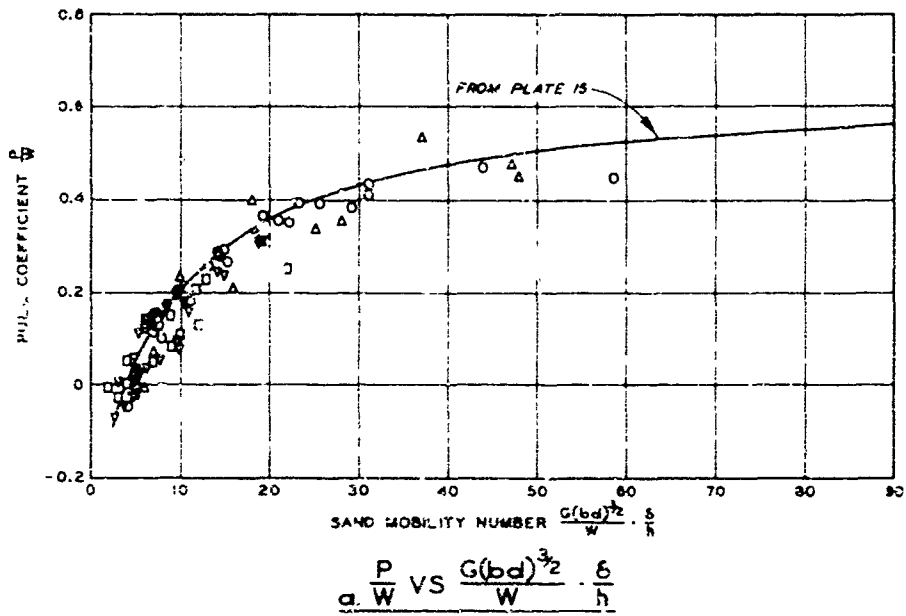

**LEGEND**


- 1.00-4, 2-PR
- △ 16 X 15-6R, 2-PR (TERRA TIRE)
- 1.75-28, 2-PR (BICYCLE TIRE)
- ▽ 1.00-20, 2-PR

**VALIDATION TEST DATA**  
 FOUR TIRES, THREE DEFLECTIONS  
 444- TO 19,999-N LOAD  
 G=1.0 TO 7.3

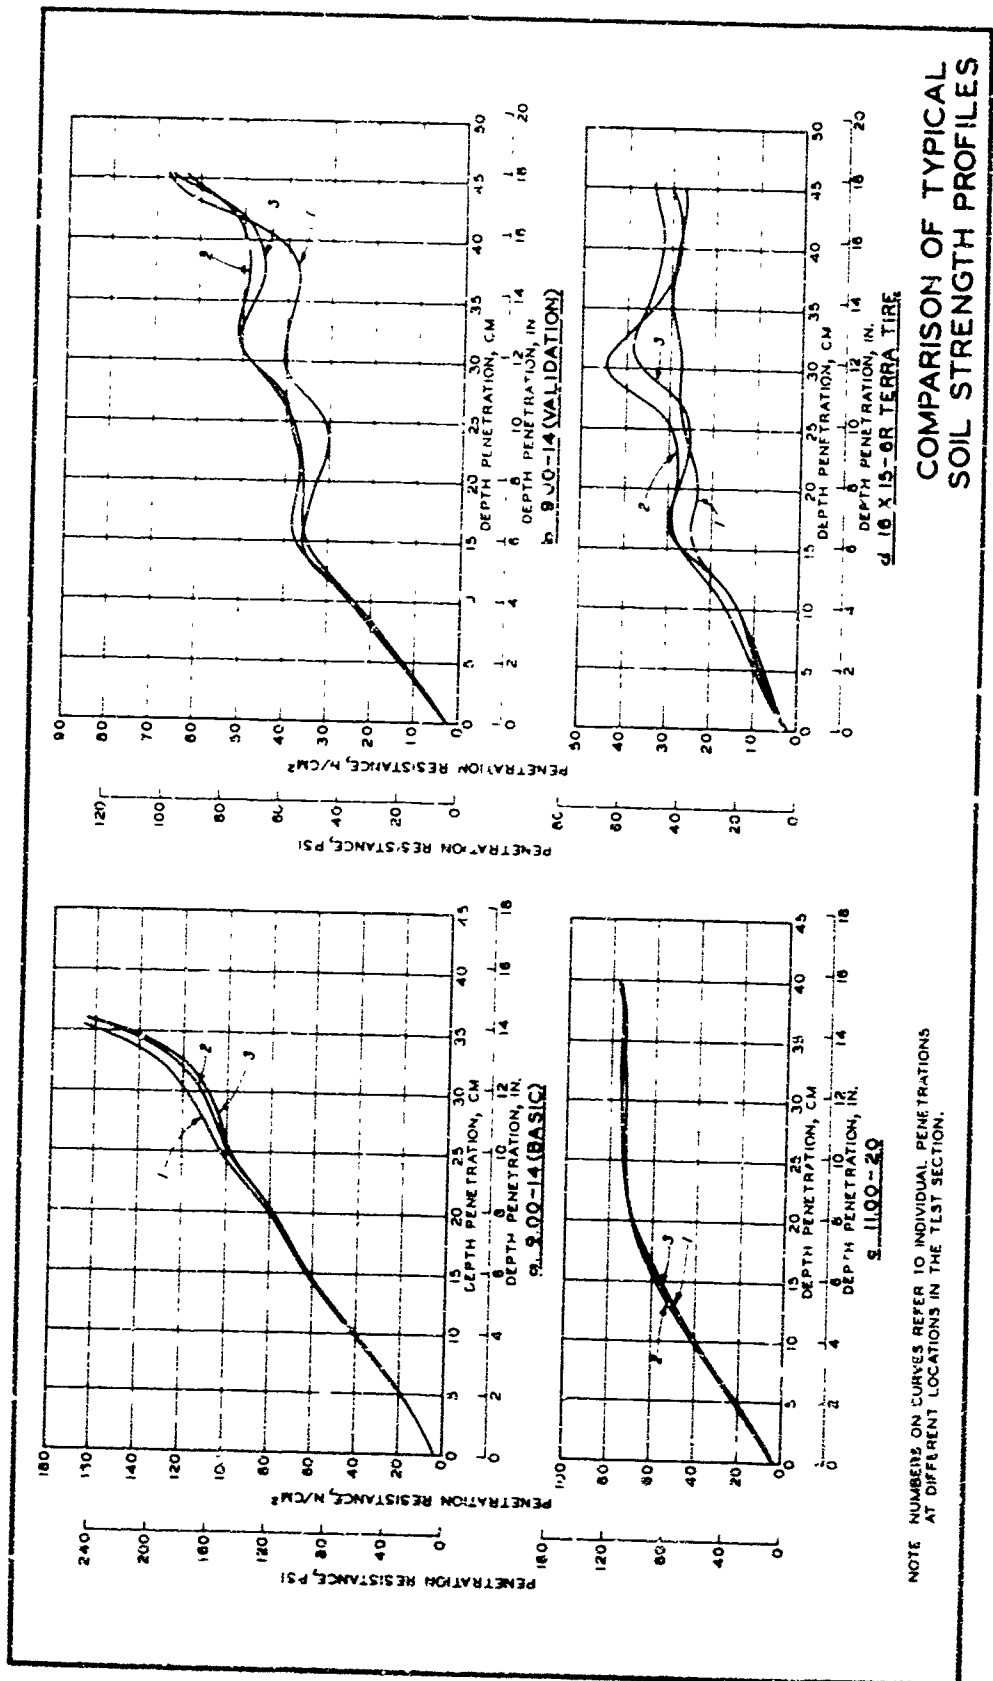


COMPARISON OF TYPICAL  
SOIL STRENGTH PROFILES

NOTE: NUMBERS ON CURVES REFER TO INDIVIDUAL PENETRATIONS AT DIFFERENT LOCATIONS IN THE TEST SECTION.

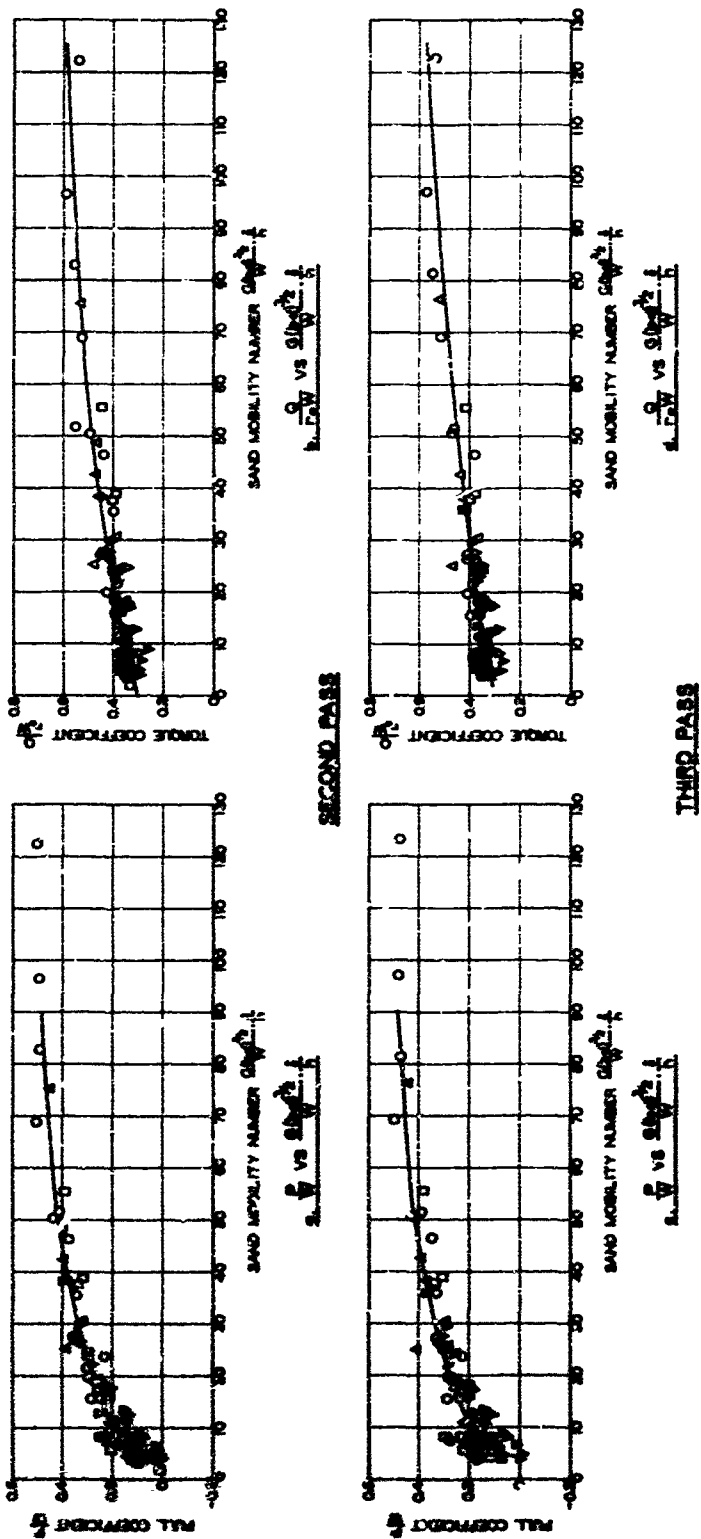


**MULTIPLE-PASS ANALYSIS  
SECOND AND THIRD PASSES**  
SOIL STRENGTH MEASURED  
BEFORE TRAFFIC  
FOUR TIRES, THREE DEFLECTIONS  
444- TO 3050-N LOAD  
0 = 0.7 TO 0.3

**LEGEND**  
 ○ 200-40, 2-PM  
 △ 200-40, 2-PM  
 □ 400-80, 2-PM  
 ▽ 400-7, 2-PM

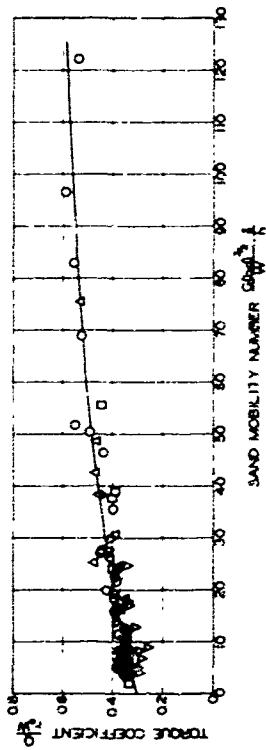


$\frac{Q}{rW} \text{ vs } \frac{Q(bcd)^2}{W} \cdot \frac{1}{N}$

SECOND PASS

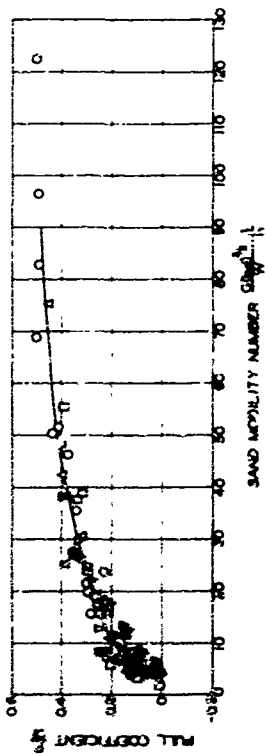


$\frac{P}{W} \text{ vs } \frac{P(bcd)^2}{W} \cdot \frac{1}{N}$

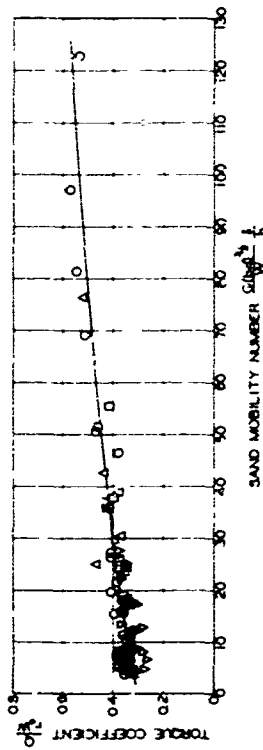

$\frac{Q}{rW} \text{ vs } \frac{Q(bcd)^2}{W} \cdot \frac{1}{N}$

THIRD PASS

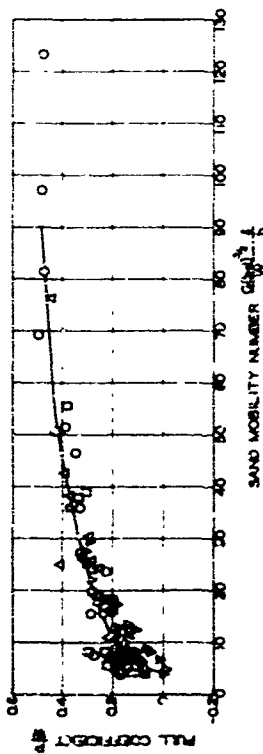

$\frac{P}{W} \text{ vs } \frac{P(bcd)^2}{W} \cdot \frac{1}{N}$

LEGEND


- 800-14, 2-PR
- △ 600-16, 2-PR
- 400-20, 2-PR
- ▽ 400-7, 2-PR

MULTIPLE-PASS ANALYSIS  
SECOND AND THIRD PASSES


SOIL STRENGTH MEASURED  
BEFORE TRAFFIC

FOUR TIRES, THREE DEFLECTIONS  
4.44" TO 3850-N LOAD

g = 0.7 TO 0.3

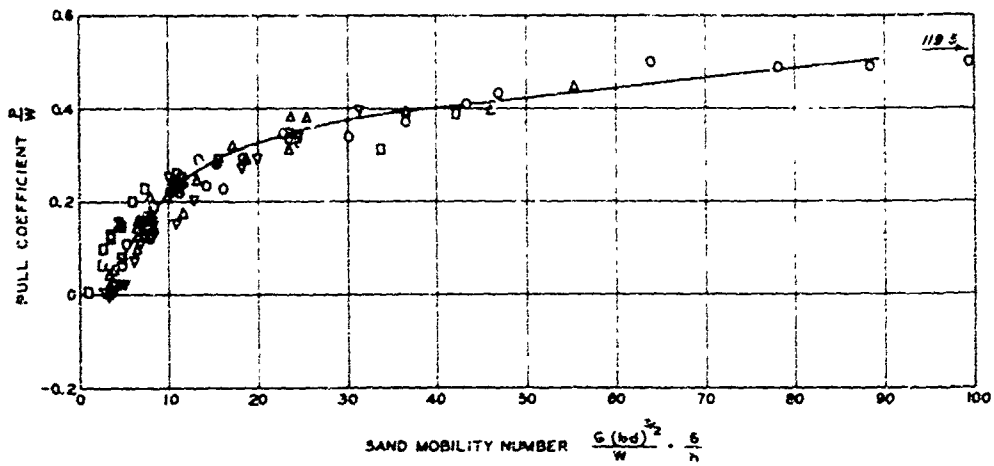

a. SECOND PASS

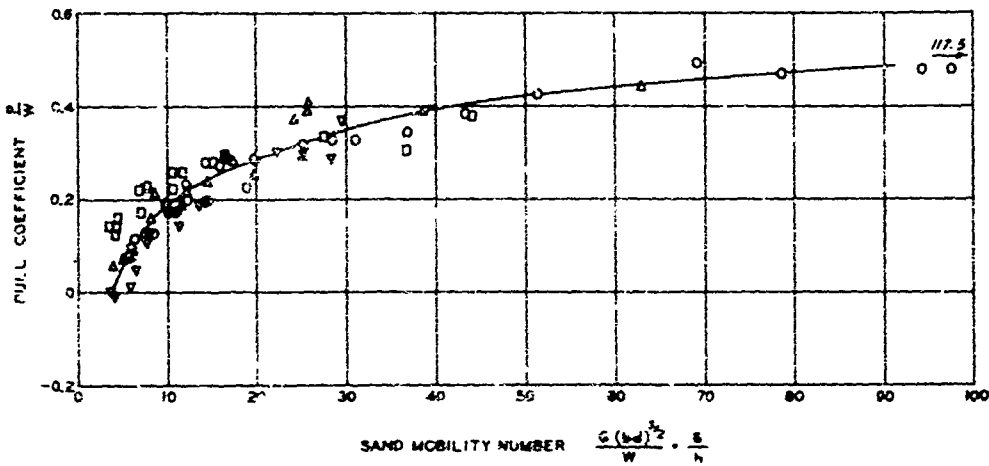

b. THIRD PASS


LEGEND

- O 9.00-14, 2-PR
- Δ 6.00-16, 2-PR
- 4.00-20, 2-PR
- ▽ 4.00-7, 2-PR

MULTIPLE-PASS ANALYSIS  
SECOND AND THIRD PASSES


SOIL STRENGTH MEASURED  
BEFORE EACH PASS

FOUR TIRES, 3 DEFLECTIONS  
444-10 3950-N LO.D  
G=0.7 TO 7.2

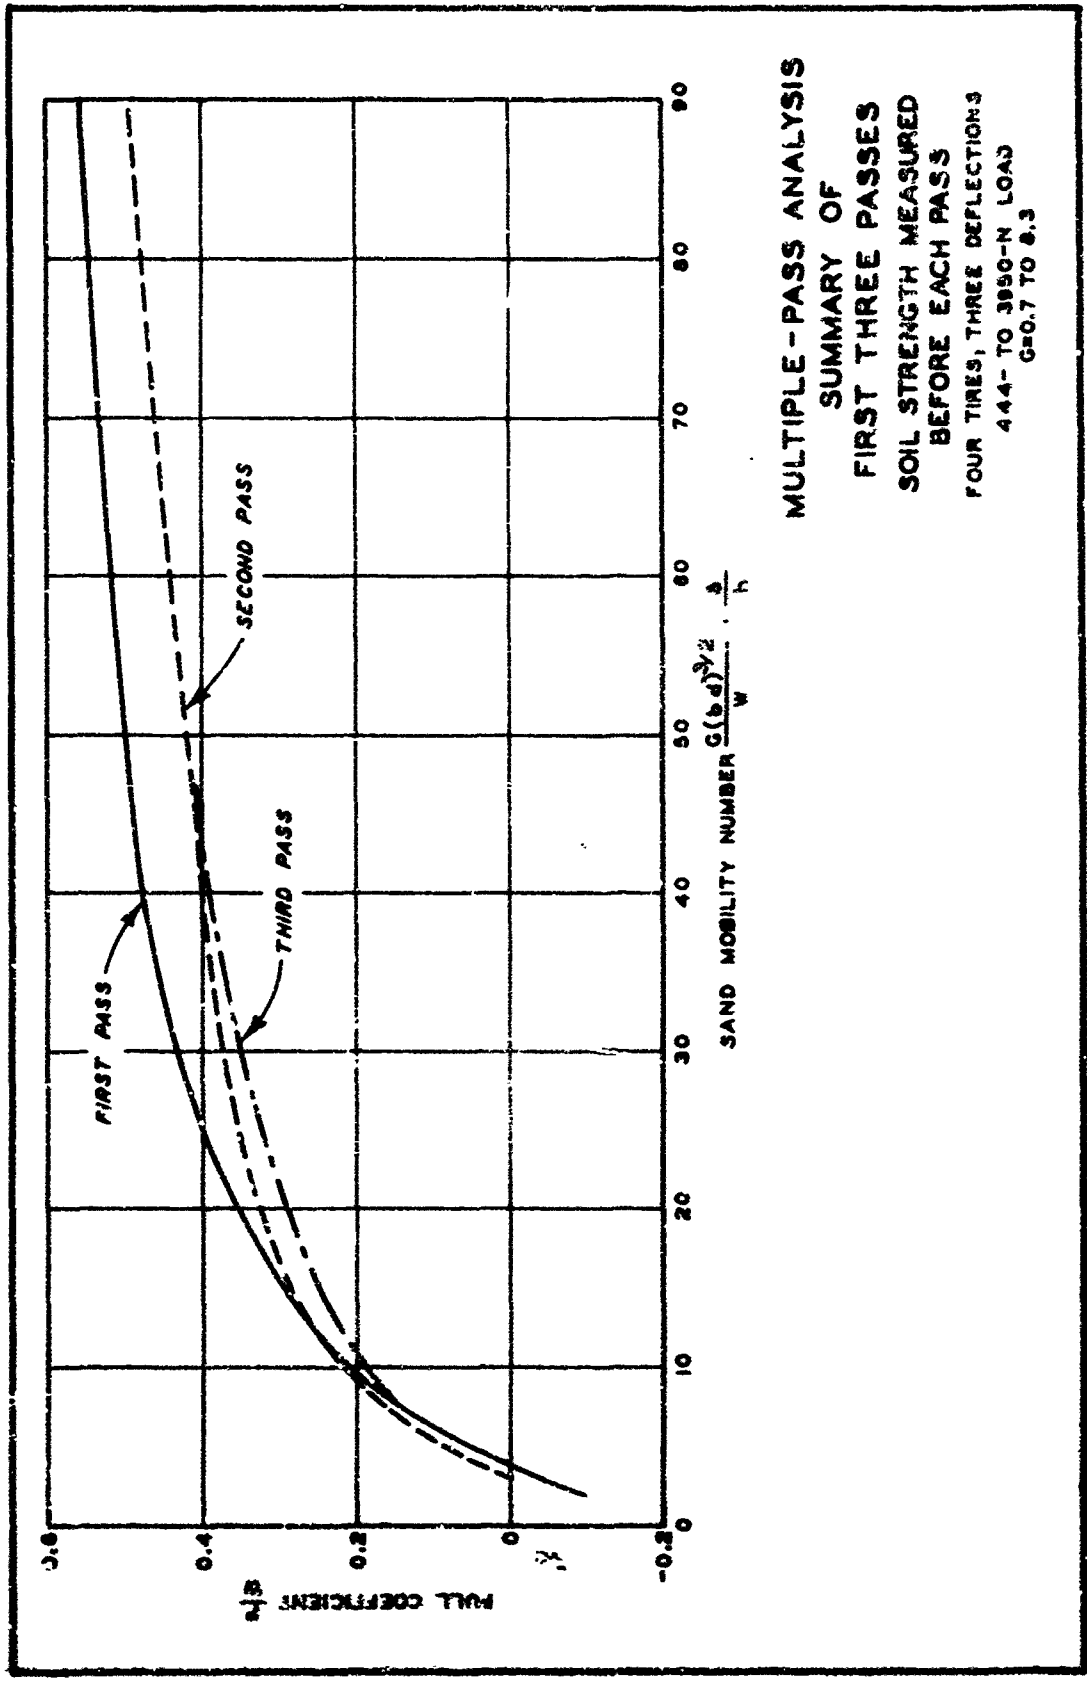


**MULTIPLE-PASS ANALYSIS**  
**SUMMARY OF**  
**FIRST THREE PASSES**  
**SOIL STRENGTH MEASURED**  
**BEFORE EACH PASS**  
**FOUR TIRES, THREE DEFLECTIONS**  
**444- TO 3950-N LOAD**  
**G=0.7 TO 8.3**




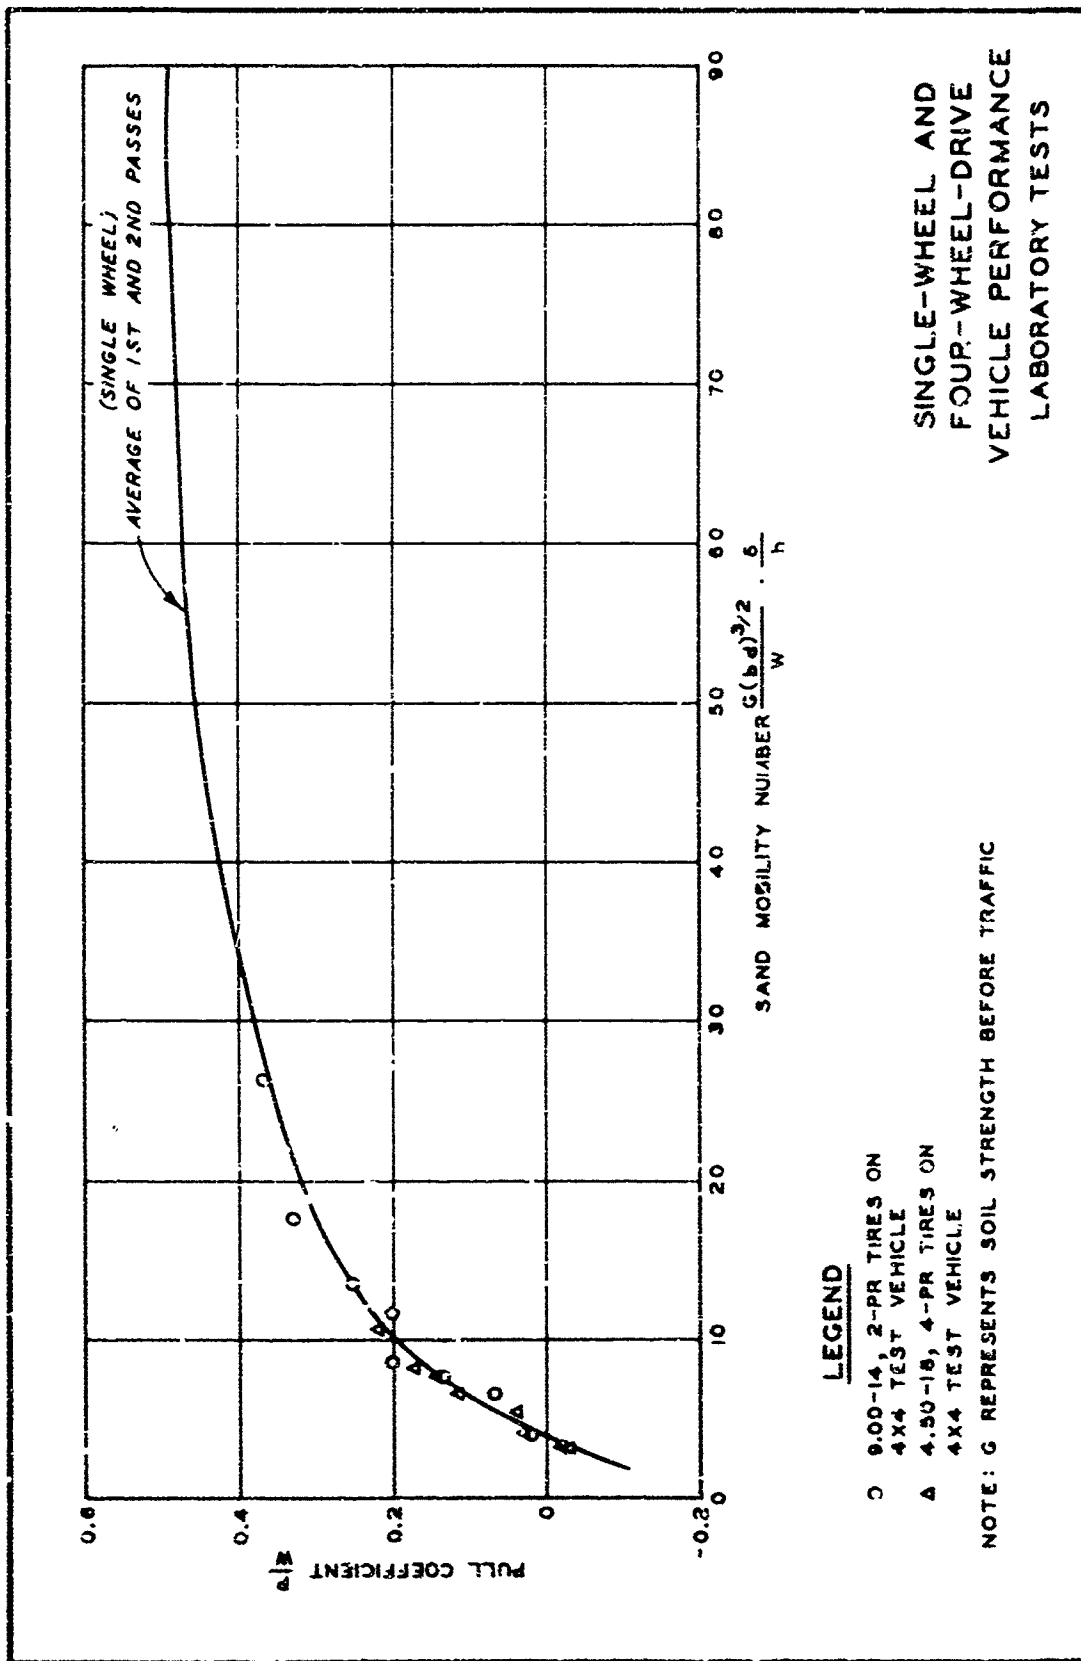

# WHEELED VEHICLE PERFORMANCE IN SAND FIELD TESTS

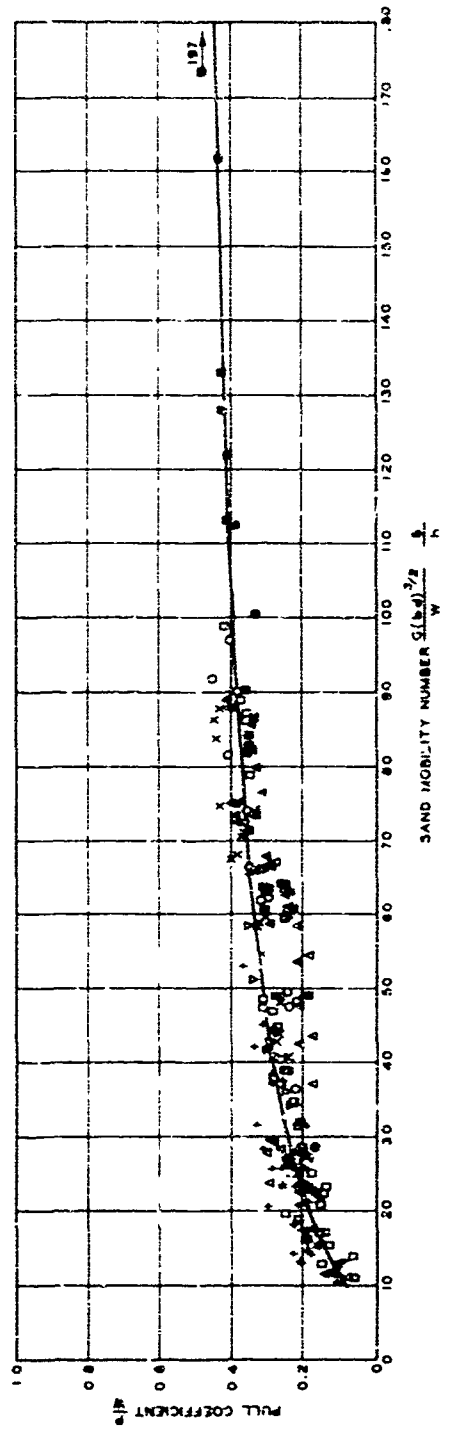



- LEGEND**
- O M38A1, 4X4 (JEEP)
  - A M37, 4X4 TRUCK, 3/4 - TON
  - D M34 AND M35, 6X6 TRUCKS, 2 1/2 - TON
  - I DUKW 353, 6X6 TRUCK, 2 1/2 - TON
  - M M41, 6X6 TRUCK, 3 - TON
  - T BUCKET LOADER, 4X4 TRACTOR
  - A TOWHADDER, 4X4 TRACTOR
  - X GULF, 4X4 CARGO CARRIER, 5 - TON (18-26)
  - GOCV, 4X4 CARGO CARRIER, 5 - TON (18-34)

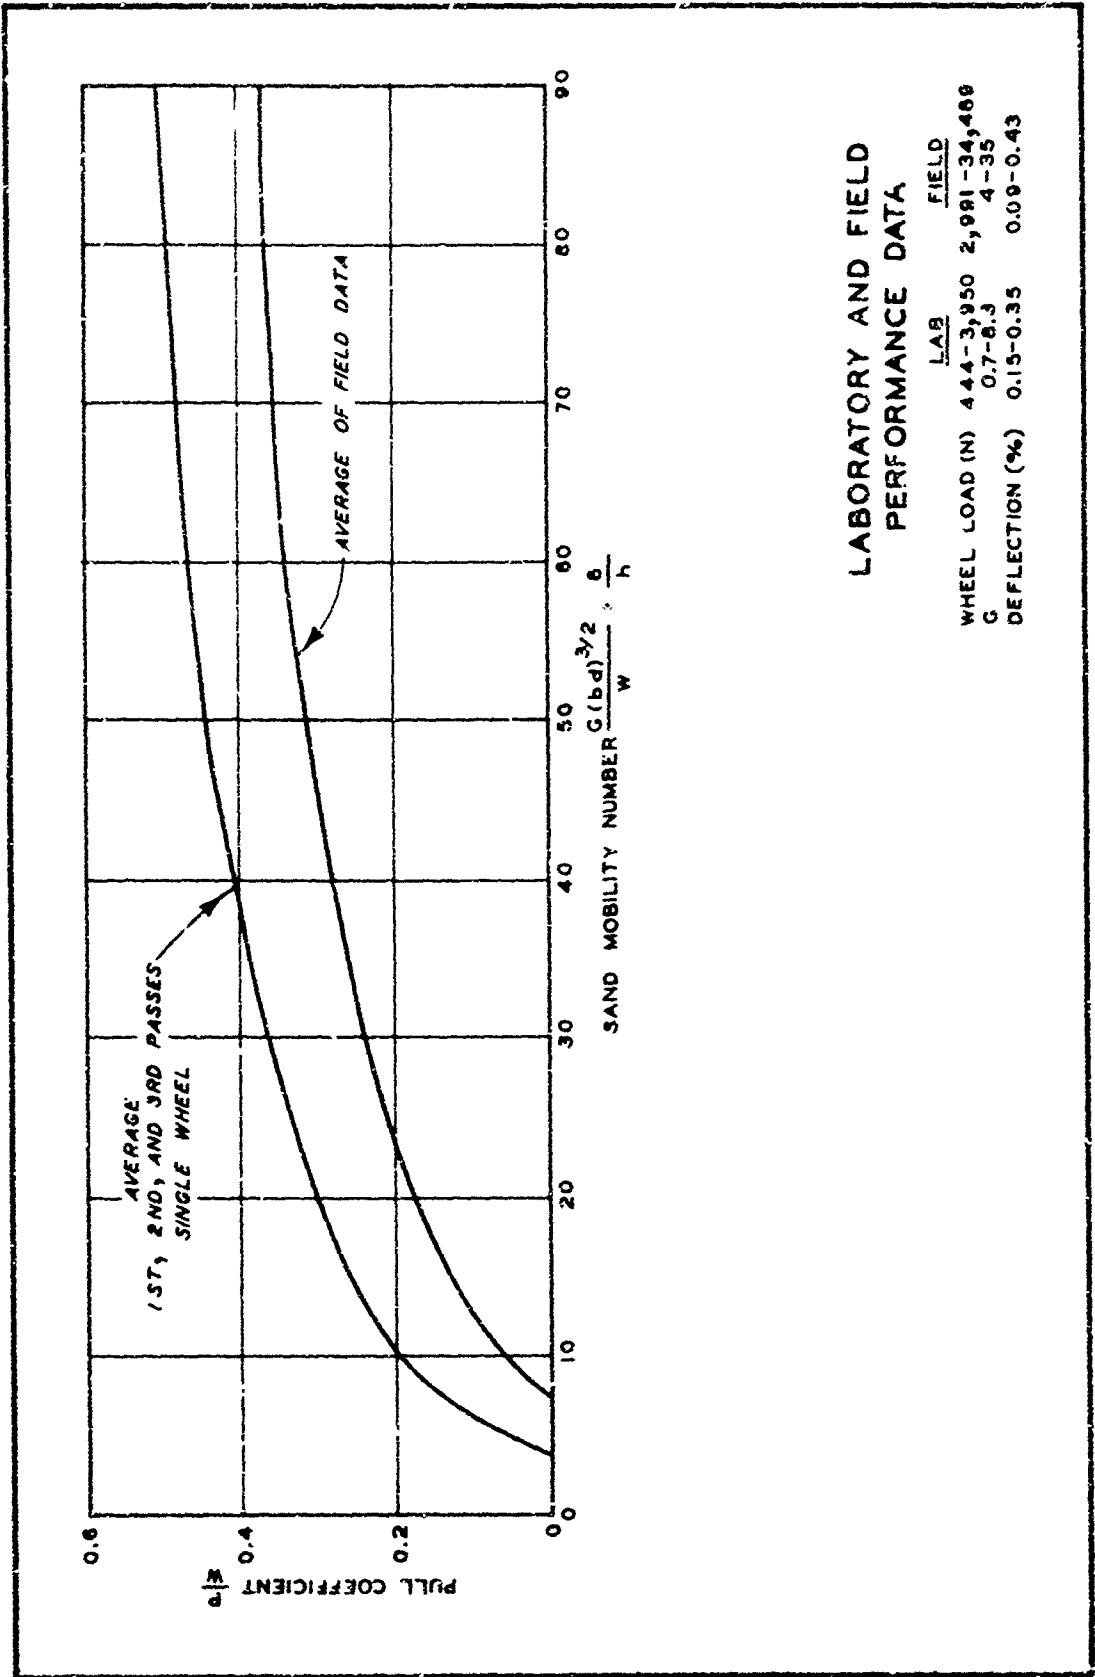

**LABORATORY AND FIELD PERFORMANCE DATA**

	LAB	FIELD
WHEEL LOAD (N)	4,44-3,950	2,991-34,400
G	0.7-8.3	4-35
DEFLECTION (%)	0.15-0.35	0.09-0.43

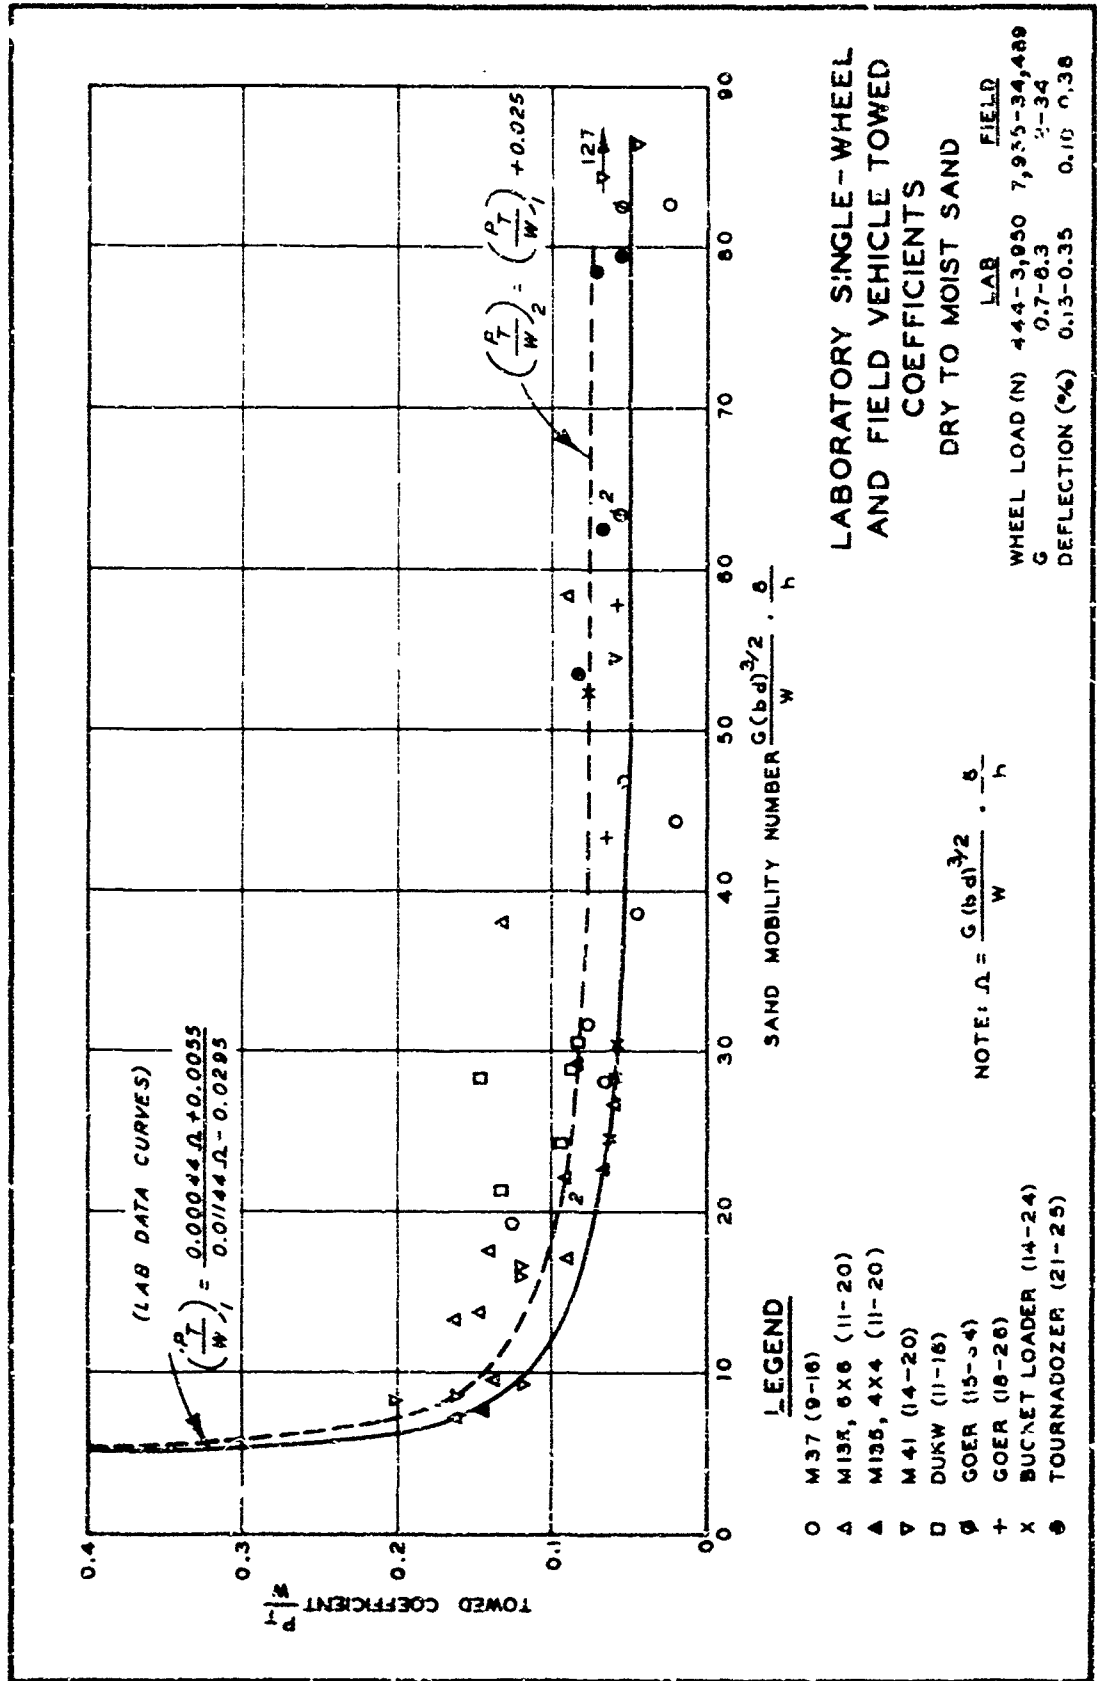

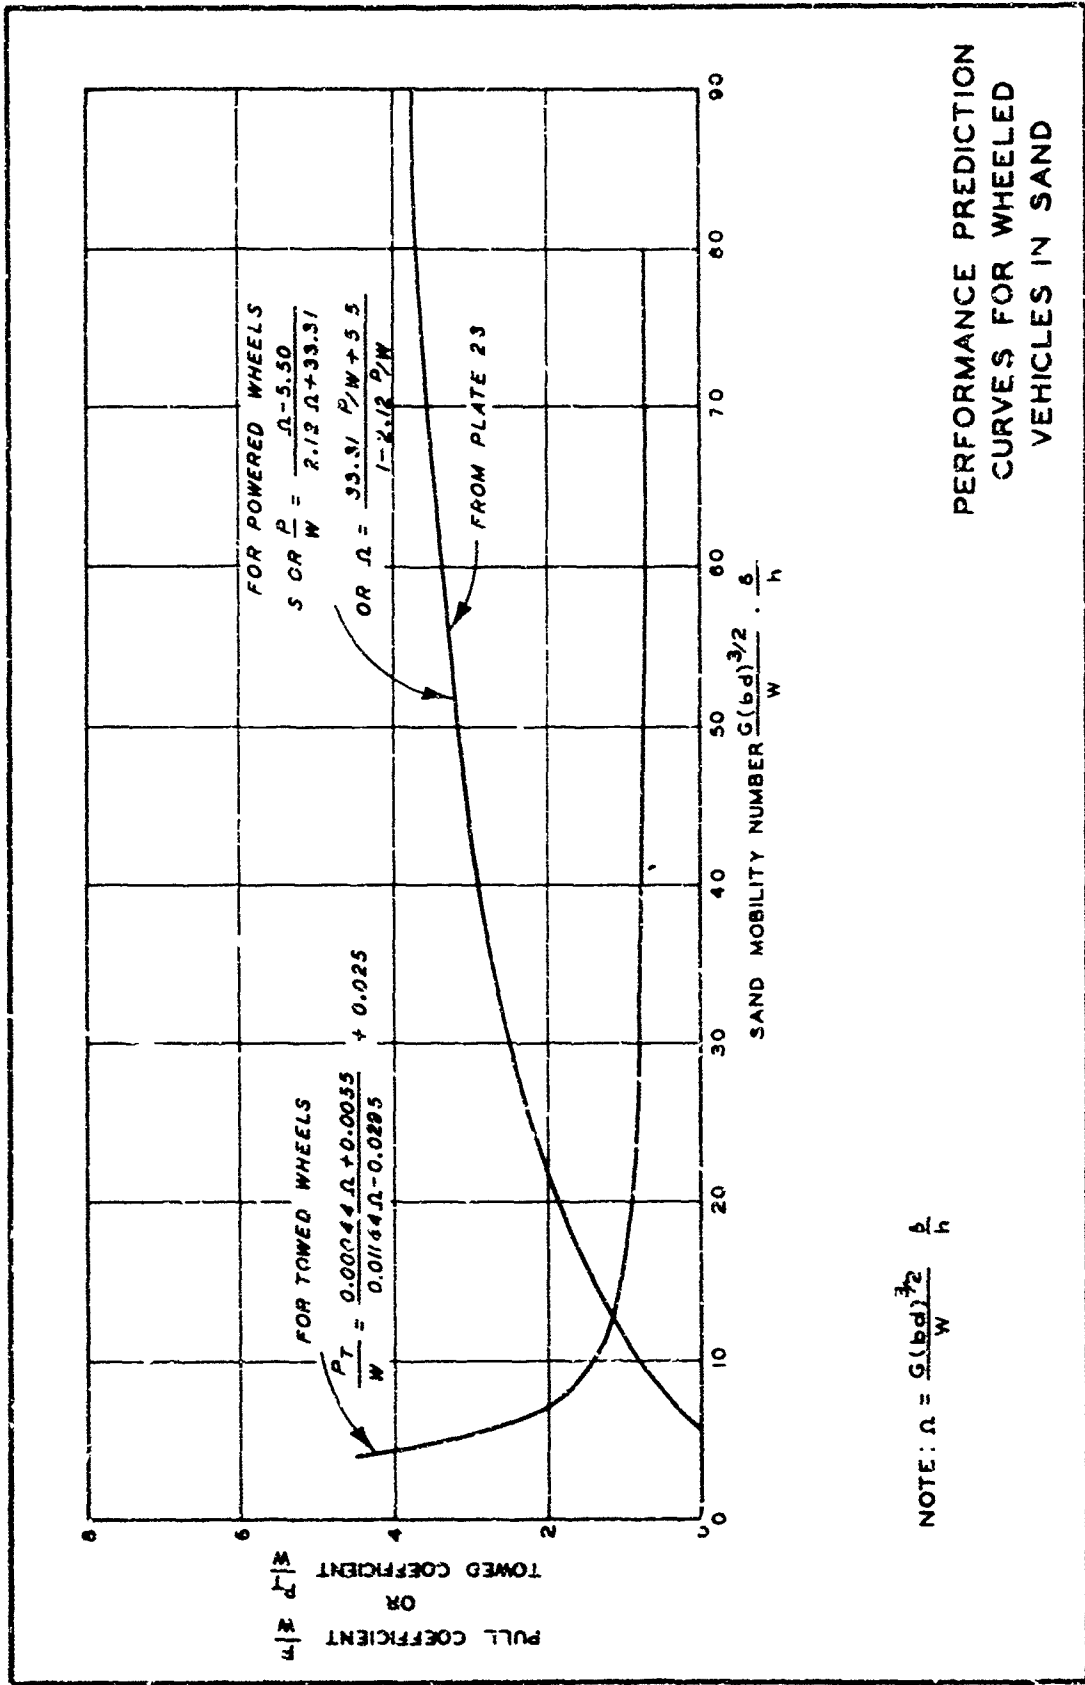

PERFORMANCE PREDICTION CURVES FOR WHEELED VEHICLES IN SAND