

UNCLASSIFIED

AD NUMBER

AD874400

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to DoD only; Administrative/Operational Use; SEP 1970. Other requests shall be referred to NASA, Marshall Flight Center, Huntsville, AL.

AUTHORITY

USAEDC ltr, 12 Jul 1974

THIS PAGE IS UNCLASSIFIED

*cy!*



**ALTITUDE DEVELOPMENTAL TESTING  
OF THE J-2S ROCKET ENGINE  
IN ROCKET DEVELOPMENT TEST CELL (J-4)  
(TESTS J4-1001-06, -07, -11, AND -15)**

**C. E. Pillow**

**ARO, Inc.**

**September 1970**

This document has been approved for public release

and its distribution is unlimited.

*Per A.F. Smith Ad  
12 July 74 signed William O. Cole*

Each transmittal of this document outside the Department of Defense must have prior approval of NASA, Marshall Space Flight Center (PM-EP-J), Huntsville, Alabama 35812.

**ENGINE TEST FACILITY  
ARNOLD ENGINEERING DEVELOPMENT CENTER  
AIR FORCE SYSTEMS COMMAND  
ARNOLD AIR FORCE STATION, TENNESSEE**

AEDC TECHNICAL LIBRARY



S 0720 00032 9304

# ***NOTICES***

When U. S. Government drawings specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

**ALTITUDE DEVELOPMENTAL TESTING  
OF THE J-2S ROCKET ENGINE  
IN ROCKET DEVELOPMENT TEST CELL (J-4)  
(TESTS J4-1001-06, -07, -11, AND -15)**

**C. E. Pillow  
ARO, Inc.**

Each transmittal of this document outside the Department of Defense must have prior approval of NASA, Marshall Space Flight Center (PM-EPJ), Huntsville, Alabama 35812.

This document has been approved for public release  
its distribution is unlimited.

*Rev. H. F. Little  
dtd. 12 July 74  
signed William D. Cole*

## FOREWORD

The work reported herein was sponsored by the National Aeronautics and Space Administration (NASA), Marshall Space Flight Center (MSFC) (PM-EP-J), under Program Element 921E, Project 9194.

The results of the tests presented were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of Arnold Engineering Development Center (AEDC). Air Force Systems Command (AFSC), Arnold Air Force Station, Tennessee, under Contract F40600-71-C-0002. Program direction was provided by NASA/MSFC; technical and engineering liaison was provided by North American Rockwell Corporation, Rocketdyne Division, manufacturer of the J-2S rocket engine, and McDonnell Douglas Astronautics Company, manufacturer of the S-IVB stage. The testing reported herein was conducted on August 25, 28, September 17, and October 29, 1969, in Rocket Development Test Cell (J-4) of the Engine Test Facility (ETF) under ARO Project No. RN1001. The manuscript was submitted for publication on June 19, 1970.

Information in this report is embargoed under the Department of State International Traffic in Arms Regulations. This report may be released to foreign governments by departments or agencies of the U. S. Government subject to approval of NASA, Marshall Space Flight Center (PM-EP-J), or higher authority. Private individuals or firms require a Department of State export license.

This technical report has been reviewed and is approved.

Walter C. Knapp  
Lt Colonel, USAF  
AF Representative, ETF  
Directorate of Test

Roy R. Croy, Jr.  
Colonel, USAF  
Director of Test

## ABSTRACT

Eleven firings of the Rocketdyne J-2S rocket engine were conducted in Rocket Development Test Cell (J-4) of the Engine Test Facility on August 25, 28, September 17, and October 29, 1969. These firings were accomplished at pressure altitudes ranging from 80,000 to 108,000 ft at engine start signal. The major objectives for these tests were to verify stable idle-mode operation, confirm that oxidizer injection temperatures were not excessive during transition from main-stage to post-main-stage idle-mode operation, evaluate main-stage performance, and determine the rate at which thrust chamber temperature increased during pre-main-stage idle mode. A full-face oxidizer flow injector configuration was utilized during this series of tests for the distribution of oxidizer during idle-mode operation. Brief durations (<20 sec) of stable idle-mode operation (chamber pressure oscillations  $\leq \pm 1$  psi) were achieved. Oxidizer injection temperatures exhibited only insignificant increases (<10°F) during transition to post-main-stage idle-mode operation. The maximum rate at which the thrust chamber temperature increased during idle-mode operation with high oxidizer (45-psia) and low fuel (27-psia) pump inlet conditions was 6°F/sec. Three firings which simulated orbital restart conditions were prematurely terminated during transition to main stage by the vibration safety cutoff system. Liquid fuel was present at the injector at dome prime when the excessive vibrations were first recorded.

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of NASA, Marshall Space Flight Center (PM-EP-J), Huntsville, Alabama 35812.

This document has been approved for public release  
 its distribution is unlimited. *Per AF letter*  
*dated 12 July 74 signed*  
*William D. Cole*

## CONTENTS

	<u>Page</u>
ABSTRACT . . . . .	iii
NOMENCLATURE . . . . .	vii
I. INTRODUCTION . . . . .	1
II. APPARATUS . . . . .	1
III. PROCEDURE . . . . .	5
IV. RESULTS AND DISCUSSION . . . . .	6
V. SUMMARY OF RESULTS . . . . .	16
REFERENCES . . . . .	17

## APPENDIXES

### I. ILLUSTRATIONS

#### Figure

1. Test Cell J-4 Complex . . . . .	21
2. Test Cell J-4, Artist's Conception . . . . .	22
3. J-2S Engine General Arrangement . . . . .	23
4. S-IVB Battleship Stage/J-2S Engine Schematic . . . . .	24
5. Engine Details . . . . .	25
6. Engine Start Logic Schematic . . . . .	29
7. Engine Start and Shutdown Sequence . . . . .	30
8. Injector Configurations . . . . .	31
9. Engine Start Conditions for Propellant Pump Inlets and Helium Tank . . . . .	32
10. Engine Ambient and Combustion Chamber Pressure, Firing 06A . . . . .	35
11. Fuel Feed System Pressures during Post-Main-Stage Idle Mode, Firing 06A . . . . .	36
12. Fuel Injection Temperature during Post-Main-Stage Idle Mode, Firing 06A . . . . .	37
13. Thrust Chamber Throat External Skin Temperatures, Firing 06A . . . . .	37
14. Engine Ambient Temperature, Firing 06A . . . . .	37
15. Engine Ambient and Combustion Chamber Pressure, Firing 06B . . . . .	38
16. Fuel Density at the Fuel Injector during Transition, Firing 06B . . . . .	39
17. Engine Ambient and Combustion Chamber Pressure, Firing 07A . . . . .	40
18. Fuel Feed System Pressures, Firing 07A . . . . .	41
19. Fuel Injection Temperature, Firing 07A . . . . .	42
20. Thrust Chamber External Skin Temperatures, Firing 07A . . . . .	42
21. Engine Ambient Temperature, Firing 07A . . . . .	42
22. Engine Ambient and Combustion Chamber Pressure, Firing 07B . . . . .	43
23. Fuel Feed System Pressures, Firing 07B . . . . .	44
24. Fuel Injection Temperature, Firing 07B . . . . .	45
25. Thrust Chamber External Skin Temperatures, Firing 07B . . . . .	45
26. Engine Ambient Temperature, Firing 07B . . . . .	45
27. Engine Ambient and Combustion Chamber Pressure, Firing 07C . . . . .	46
28. Fuel Feed System Pressures, Firing 07C . . . . .	47

<u>Figure</u>	<u>Page</u>
29. Fuel Injection Temperature, Firing 07C . . . . .	47
30. Thrust Chamber External Skin Temperatures, Firing 07C . . . . .	47
31. Engine Ambient and Combustion Chamber Pressure, Firing 11A . . . . .	48
32. Fuel Density at the Fuel Injector, Firing 11A . . . . .	48
33. Engine Ambient Temperature, Firing 11A . . . . .	49
34. Thrust Chamber External Skin Temperature, Firing 11A . . . . .	49
35. Engine Ambient and Combustion Chamber Pressure, Firing 11B . . . . .	50
36. Fuel Feed System Pressures, Firing 11B . . . . .	51
37. Propellant Feed System Conditions during Idle Mode, Firing 11B . . . . .	52
38. Thrust Chamber External Skin Temperatures, Firing 11B . . . . .	55
39. Engine Ambient and Combustion Chamber Pressure, Firing 11C . . . . .	56
40. Fuel Density at the Fuel Injector, Firing 11C . . . . .	57
41. Propellant Feed System Conditions during Idle Mode, Firing 11C . . . . .	58
42. Thrust Chamber External Skin Temperature, Firing 11C . . . . .	61
43. Hot Gas Tapoff Manifold Temperature . . . . .	62
44. Fuel Turbine Inlet Temperature . . . . .	62
45. Fuel Turbine Speed . . . . .	63
46. Solid-Propellant Turbine Starter Chamber Pressure . . . . .	63
47. Engine Combustion Chamber Pressure, PC-1P . . . . .	64
48. Engine Ambient and Combustion Chamber Pressure, Firing 15A . . . . .	65
49. Thrust Chamber Throat External Skin Temperature, Firing 15B . . . . .	66
50. Engine Ambient and Combustion Chamber Pressure, Firing 15B . . . . .	66
51. Engine Ambient and Combustion Chamber Pressure, Firing 15C . . . . .	67
52. Propellant Feed System Condition during Idle Mode, Firing 15C . . . . .	68
53. Fuel Density at the Fuel Injector, Firing 15C . . . . .	71
II. TABLES	
I. Major Engine Components (Effective Test J4-1001-06) . . . . .	72
II. Summary of Engine Orifices . . . . .	73
III. Engine Modifications (Between Tests J4-1001-05 and J4-1001-15) . . . . .	74
IV. Engine Component Replacements (Between Tests J4-1001-05 and J4-1001-15) . . . . .	75
V. Engine Purge and Component Conditioning Sequence . . . . .	76
VI. Summary of Test Requirements and Results . . . . .	77
VII. Engine Valve Timings . . . . .	79
III. INSTRUMENTATION . . . . .	80
IV. METHODS OF CALCULATIONS . . . . .	109



**NOMENCLATURE**

<b>A</b>	Area, sq in.
<b>ASI</b>	Augmented spark igniter
<b>CCP</b>	Customer connect panel
<b>EBW</b>	Exploding bridgewire
<b>FM</b>	Frequency modulation
<b>MFV</b>	Main fuel valve
<b>MOV</b>	Main oxidizer valve
<b>O/F</b>	Propellant mixture ratio, oxidizer to fuel, by weight
<b>SPTS</b>	Solid-propellant turbine starter
<b>T/C</b>	Thrust chamber
<b>t-0</b>	Time at which helium control and idle-mode solenoids are energized; engine start
<b>VSC</b>	Vibration safety counts, indicators of engine vibration in excess of 150 g rms in a 960- to 6000-Hz frequency range

**SUBSCRIPTS**

<b>f</b>	Force
<b>m</b>	Mass
<b>t</b>	Throat

## SECTION I INTRODUCTION

Testing of the Rocketdyne J-2S rocket engine using an S-IVB battleship stage has been in progress at AEDC since December 1968. Reported herein are the results of eleven firings conducted during test periods J4-1001-06,-07,-11 and -15. The major objectives for these tests were to verify stable idle-mode operation and transition from main-stage to idle-mode operation, to evaluate main-stage performance, and determine the rate at which the thrust chamber temperature increased during pre-main-stage idle mode.

The firings reported herein were accomplished in Rocket Development Test Cell (J-4) (Figs. 1 and 2, Appendix I) of the Engine Test Facility (ETF) at pressure altitudes ranging from 80,000 to 108,000 ft (geometric pressure altitude, Z, Ref. 1) at engine start signal. Data collected to accomplish the test objectives are presented herein.

## SECTION II APPARATUS

### 2.1 TEST ARTICLE

The test article was a J-2S rocket engine (Fig. 3) designed and developed by Rocketdyne Division of North American Rockwell Corporation. The engine uses liquid oxygen and liquid hydrogen as propellants and is designed to operate either in idle mode at a nominal thrust of 5000 lbf and mixture ratio of 2.5, or at main stage at any precalibrated thrust level between 230,000 and 265,000 lbf at a mixture ratio of 5.5. The engine design is capable of transition from idle-mode to main-stage operation after a minimum of 1-sec idle mode; from main stage the engine can either be shut down or make a transition back to idle-mode operation before shutdown. An S-IVB battleship stage was used to supply propellants to the engine. A schematic of the battleship stage is presented in Fig. 4.

Listings of major engine components and engine orifices for these test periods are presented in Tables I and II, respectively (Appendix II). All engine modifications and component replacements performed during this report period are presented in Tables III and IV, respectively.

#### 2.1.1 J-2S Rocket Engine

The J-2S rocket engine (Figs. 3 and 5, Refs. 2 and 3) features the following major components:

1. Thrust Chamber — The tubular-walled, bell-shaped thrust chamber consists of an 18.6-in.-diam combustion chamber with a throat diameter of 12.192 in., a characteristic length ( $L^*$ ) of 35.4, and a divergent nozzle with an expansion ratio of 39.62. Thrust chamber length (from the injector flange to the nozzle exit) is 108.6 in. Cooling is accomplished by the circulation of engine fuel flow

downward from the fuel manifold through 180 tubes and then upward through 360 tubes to the injector and by film cooling inside the combustion chamber.

2. **Thrust Chamber Injector** – The injector is a concentric-orificed (concentric fuel orifices around the oxidizer post orifices), porous-faced injector. Fuel and oxidizer injector orifice areas are 19.2 and 5.9 sq in., respectively. The porous material, forming the injector face, allows approximately 3.5 percent of main-stage fuel flow to transpiration cool the face of the injector. During idle-mode operation, oxidizer is supplied through a diffuser located in the top of the injector (Fig. 5c) which disperses the oxidizer to all portions of the injector face. During main-stage operation the main oxidizer valve is opened and supplies the major flow of oxidizer to the injector face.
3. **Augmented Spark Igniter** – The augmented spark igniter unit is mounted on the thrust chamber injector and supplies the initial energy source to ignite propellants in the main combustion chamber. The augmented spark igniter chamber is an integral part of the thrust chamber injector. Fuel and oxidizer are ignited in the combustion area by two spark plugs.
4. **Fuel Turbopump** – The fuel turbopump is a one and one-half stage, centrifugal-flow unit, powered by a direct-drive, two-stage turbine. The pump is self-lubricated and nominally produces, at the 265,000-lbf-thrust-rated condition, a head rise of 60,300 ft of liquid hydrogen at a flow rate of 9750 gpm for a rotor speed of 29,800 rpm.
5. **Oxidizer Turbopump** – The oxidizer turbopump is a single-stage, centrifugal-flow unit, powered by a direct-drive, two-stage turbine. The pump is self-lubricated and nominally produces, at the 265,000-lbf-thrust-rated condition, a head rise of 3250 ft of liquid oxygen at a flow rate of 3310 gpm for a rotor speed of 10,500 rpm.
6. **Propellant Utilization Valve** – The motor-driven propellant utilization valve is a sleeve-type valve mounted on the oxidizer turbopump and bypasses liquid oxygen from the discharge to the inlet side of the pump to vary engine mixture ratio.
7. **Main Oxidizer Valve** – The main oxidizer valve is a pneumatically actuated, two-stage, butterfly-type valve located in the oxidizer high-pressure duct between the turbopump and the injector. The first-stage actuator positions the main oxidizer valve at the nominal 12-deg position to obtain initial main-stage-phase operation; the second-stage actuator ramps the main oxidizer valve fully open to accelerate the engine to the main-stage operating level.

8. **Main Fuel Valve** – The main fuel valve is a pneumatically actuated, butterfly-type valve located in the fuel high-pressure duct between the turbopump and the fuel manifold.
9. **Pneumatic Control Package** – The pneumatic control package controls all pneumatically operated engine valves and purges.
10. **Electrical Control Assembly** – The electrical control assembly provides the electrical logic required for proper sequencing of engine components during operation. The logic requires a minimum of 1-sec idle-mode operation before transition to main stage.
11. **Flight Instrumentation Package** – The instrumentation package contains sensors required to monitor critical engine parameters. The package provides environmental control for the sensors.
12. **Helium Tank** – The helium tank has a volume of 4000 cu in. and provides a helium pressure supply to the engine pneumatic control system for three complete engine operational cycles.
13. **Thrust Chamber Bypass Valve** – The thrust chamber bypass valve is a pneumatically operated, normally open, butterfly-type valve which allows fuel to bypass the thrust chamber body during idle-mode operation.
14. **Idle-Mode Valve** – The idle-mode valve is a pneumatically operated, ball-type valve which supplies liquid oxygen to the idle-mode diffuser of the thrust chamber injector during both idle-mode and main-stage operation.
15. **Hot Gas Tapoff Valve** – The hot gas tapoff valve is a pneumatically operated, butterfly-type valve which provides on-off control of combustion chamber gases to drive the propellant turbopumps.
16. **Solid-Propellant Turbine Starter** – The solid-propellant turbine starter provides the initial driving energy (transition to main stage) for the propellant turbopumps to prime the propellant feed systems and accelerate the turbopumps to 75 percent of their main-stage operating level. A three-start capability is provided.

### **2.1.2 S-IVB Battleship Stage**

The S-IVB battleship stage, which is mechanically configured to simulate the S-IVB lightweight vehicle, is approximately 22 ft in diameter, is 49 ft long, and has a maximum propellant capacity of 43,000 lbm of liquid hydrogen and 194,000 lbm of liquid oxygen. The propellant tanks, fuel above oxidizer, are separated by a common bulkhead. Propellant prevalves, in the low-pressure ducts (external to the tanks)

interfacing the stage and engine, retain propellants in the stage until being admitted into the engine to the main propellant valves and serve as emergency engine shutoff valves. Vent and relief valve systems are provided for both propellant tanks.

Pressurization of the fuel and oxidizer tanks was accomplished by facility systems using hydrogen and helium, respectively, as the pressurizing gases. The engine-supplied gaseous hydrogen and gaseous oxygen for fuel and oxidizer tank pressurization during flight were routed to the respective facility venting systems.

## 2.2 TEST CELL

Rocket Development Test Cell (J-4), Fig. 2, is a vertically oriented test unit designed for static testing of liquid-propellant rocket engine and propulsion systems at pressure altitudes of 100,000 ft. The basic cell construction provides a 1.5-million-lbf-thrust capacity. The cell consists of four major components: (1) test capsule, 48 ft in diameter and 82 ft in height, situated at grade level and containing the test article; (2) spray chamber, 100 ft in diameter and 250 ft in depth, located directly beneath the test capsule to provide exhaust gas cooling and dehumidification; (3) storage and delivery systems for coolant water, steam, nitrogen (gaseous and liquid), hydrogen (gaseous and liquid), and liquid-oxygen and gaseous-helium for operation of the cell and test article; and (4) control building, containing test article controls, test cell controls, and data acquisition equipment. Exhaust machinery is connected with the spray chamber and maintains a minimum test cell pressure before and after the engine firing and exhausts the products of combustion from the engine firing. Before a firing, the facility steam ejector, in series with the exhaust machinery, provides a pressure altitude of 100,000 ft in the test capsule. A detailed description of the test cell is presented in Ref. 4.

The battleship stage and the J-2S engine were oriented vertically downward on the centerline of the diffuser-steam ejector assembly. This assembly consists of a diffuser duct (20 ft in diameter by 150 ft in length), a centerbody steam ejector within the diffuser duct, a diffuser insert (13.5 ft in diameter by 30 ft in length) at the inlet to the diffuser duct, and a gaseous-nitrogen annular ejector above the diffuser insert. The diffuser insert was provided for dynamic pressure recovery of the engine exhaust gases and to maintain engine ambient pressure altitude (attained by the steam ejector) during the engine firing. The annular ejector was provided to suppress steam recirculation into the test capsule during steam ejector shutdown.

The test cell was also equipped with (1) a gaseous-nitrogen purge system for continuously inerting the normal air in-leakage of the cell; (2) a gaseous-nitrogen repressurization system for raising test cell pressure after engine cutoff to a level equal to spray chamber pressure and for rapid emergency inerting of the capsule; and (3) a spray chamber liquid-nitrogen supply and distribution manifold for initially inerting the spray chamber and exhaust ducting and for increasing the molecular weight of the hydrogen-rich exhaust products.

## 2.3 INSTRUMENTATION

Instrumentation systems were provided to measure engine, stage, and facility parameters. The engine instrumentation was comprised of (1) flight instrumentation for

the measurement of critical engine parameters and (2) facility instrumentation which was provided to verify the flight instrumentation and to measure additional engine parameters. The flight instrumentation was provided and calibrated by the engine manufacturer; facility instrumentation was initially calibrated and periodically recalibrated at AEDC. Appendix III contains a list of all measured engine test parameters and the locations of selected sensing points.

Pressure measurements were made using strain-gage and capacitance-type pressure transducers. Temperature measurements were made using resistance temperature transducers and thermocouples. Oxidizer and fuel turbopump shaft speeds were sensed by magnetic pickup. Fuel and oxidizer flow rates to the engine were measured by turbine-type flowmeters which are an integral part of the engine. Engine vibrations were measured by piezoelectric accelerometers. Primary engine and stage valves were instrumented with linear potentiometers and limit switches.

The data acquisition systems were calibrated by (1) precision electrical shunt resistance substitution for the pressure transducers and resistance temperature transducer units; (2) voltage substitution for the thermocouples; (3) frequency substitution for shaft speeds and flowmeters; and (4) frequency-voltage substitution for accelerometers and capacitance-type pressure transducer.

The types of data acquisition and recording systems used during this test period were (1) a multiple-input digital data acquisition system scanning each parameter at 50 samples per second and recording on magnetic tape; (2) single-input, continuous-recording FM systems recording on magnetic tape; (3) photographically recording galvanometer oscillographs; (4) direct-inking, null-balance, potentiometer-type X-Y plotters and strip charts; and (5) optical data recorders. Applicable systems were calibrated before each test (atmospheric and altitude calibrations). Television cameras, in conjunction with video tape recorders, were used to provide visual coverage during an engine firing, as well as for replay capability for immediate examination of unexpected events.

## **2.4 CONTROLS**

Control of the J-2S engine, battleship stage, and test cell systems during the terminal countdown was provided from the test cell control room. A facility control logic network was provided to interconnect the engine control system, major stage systems, the engine safety cutoff system, the observer cutoff circuits, and the countdown sequencer. A schematic of the engine start control logic is presented in Fig. 6. The sequence of engine events for start and shutdown is presented in Figs. 7a and b.

## **SECTION III PROCEDURE**

Preoperational procedures were begun several hours before the test period. All consumable storage systems were replenished; engine inspections, leak checks, and drying procedures were conducted. Propellant tank pressurants and engine pneumatic and purge gas samples were taken to ensure that specification requirements were met. Chemical

analysis of propellants was provided by the propellant suppliers. Facility sequence, engine sequence, and engine abort checks were conducted within a 24-hr time period before an engine firing to verify the proper sequence of events. Facility and engine sequence checks consisted of verifying the timing of valves and events to be within specified limits; the abort checks consisted of electrically simulating engine malfunctions to verify the occurrence of an automatic engine cutoff signal. A final engine sequence check was conducted immediately preceding the test period.

Oxidizer injector and thrust chamber jacket purges were initiated before evacuating the test cell. After completion of instrumentation calibrations at atmospheric conditions, the solid-propellant turbine starters were installed, the test cell was evacuated to approximately 0.5 psia with the exhaust machinery, and instrumentation calibrations at altitude conditions were conducted. Immediately before loading propellants on board the vehicle, the cell and exhaust ducting atmosphere was inerted. At this same time, the cell nitrogen purge was initiated for the duration of the test period, except for engine main-stage operation. The vehicle propellant tanks were then loaded, and the remainder of the terminal countdown was conducted. Temperature conditioning of the various engine components was accomplished as required, using the facility-supplied engine component conditioning system. Table V presents the engine purge and thermal conditioning operations during the terminal countdown and immediately following the engine firing.

## SECTION IV RESULTS AND DISCUSSION

### 4.1 GENERAL

Eleven firings of the Rocketdyne J-2S rocket engine (S/N J-112-1F during tests J4-1001-06, -07, and -11 and S/N J-112-1H during test J4-1001-15) were accomplished. These test periods were conducted on August 25, 28, September 17, and October 29, 1969, respectively, in Rocket Development Test Cell (J-4) of the Engine Test Facility (ETF). Pressure altitudes at engine start signal ranged from 80,000 to 108,000 ft.

Each of the firings utilized a solid-propellant turbine starter to supply the necessary energy to transition from idle-mode to main-stage operation. Previous test periods which used solid-propellant turbine starters are presented in Refs. 5 and 6.

The injector assembly has been modified several times since the initiation of testing of the J-2S engine at AEDC. The first injector assembly utilized was an inner four row configuration injector (Fig. 8). Low idle-mode performance and engine damage resulting from detonations in the thrust chamber necessitated the change to the row ten oxidizer injection configuration, Fig. 8. This design was to improve propellant mixing and combustion efficiency. The increase in combustion efficiency was relatively insignificant. Therefore, simulations of the full face oxidizer flow configuration injector were conducted using an inner four row configuration injector with the main oxidizer valve open to its first-stage position during idle-mode operation. Results of those simulations demonstrated improved performance and feasibility of the proposed configuration. The

subsequent configuration (full-face oxidizer flow) reported herein allowed oxidizer to be dispersed across the entire injector face (Fig. 8) during idle mode with the main oxidizer valve closed. Firing J4-1001-06A was the first firing to utilize the full-face oxidizer flow configuration injector.

In addition to low performance during idle-mode operation, oxidizer injection temperatures were excessively high (up to 1500°F during transition to post-main-stage idle-mode operation). However, with the full-face oxidizer flow injector, increases in oxidizer injection temperature were insignificant (<10°F) during transition to post-main-stage idle-mode operation.

A summary of significant test variables and results is presented in the matrix on page 8. Specific test objectives and results are presented in subsequent sections. The data presented were obtained using the digital data acquisition system, unless indicated otherwise.

Test requirements and specific test results are summarized in Table VI. Start and shutdown transient operating times for selected engine valves are presented in Table VII. Engine start conditions for the propellant pump inlets and the helium tank are shown in Fig. 9. The results of the firings reported herein are presented in Figs. 10 through 53.

## 4.2 TEST RESULTS

### 4.2.1 Firing J4-1001-06A

The objectives for this firing were to (1) verify stable post-main-stage idle-mode operation, (2) confirm that oxidizer injection temperatures were not excessive during transition to post-main-stage idle mode, (3) and evaluate main-stage performance. The S-IVB battleship stage prevalves were opened approximately 60 min before engine start signal to precondition the propellant feed systems.

Post-main-stage idle-mode operation was accomplished; however, stabilized engine operation was not attained. Chamber pressure oscillations were observed from 4.3 sec after main-stage cutoff signal until engine cutoff signal. Pressure oscillations of up to ±9 psi were recorded in the fuel feed system during this time period. Corresponding fuel injection temperature increases of up to 100°F were also observed. The thrust chamber external skin temperatures, TTCT-T1 and E1, were increasing from 1.8 sec after main-stage cutoff signal until engine cutoff signal. The maximum throat temperature was -190°F at engine cutoff signal. Thrust chamber heat transfer rates may have been affected by increasing engine ambient pressure and temperature during post-main-stage idle-mode operation (Figs. 10 and 14). The maximum test cell pressure and temperature of 0.36 psia and 245°F respectively, were recorded 6.7 sec after main-stage cutoff signal.

Excessive oxidizer injection temperatures were not observed during transition to post-main-stage idle mode. There was a slight increase (<25°F) indicated in the oxidizer idle-mode supply line temperature. Previous tests, Ref. 7, using the inner four row injector configuration, experienced transient oxidizer injector temperatures as high as 1500°F during transition from main-stage to post-main-stage idle mode.



<u>Firing J4-1001-</u>	<u>06A</u>	<u>06B</u>	<u>07A</u>	<u>07B</u>	<u>07C</u>	<u>11A</u>	<u>11B</u>	<u>11C</u>	<u>15A</u>	<u>15B</u>	<u>15C</u>
Fuel pump inlet pressure at t-0, psia	33.0	33.3	33.2	33.4	41.8	41.1	27.9	39.7	29.9	30.1	32.4
Oxidizer pump inlet pressure at t-0, psia	39.6	39.3	39.2	46.0	39.3	39.7	40.3	31.7	39.2	44.7	32.5
Main oxidizer valve First-Stage gate angle, deg	11.5	11.5	10.5	10.5	10.5	10.5	10.5	10.5	11.7	11.7	11.7
Oxidizer idle-mode line orifice diameter, in.	0.848	0.848	0.977	0.977	0.977	0.977	0.977	0.977	0.911	0.911	0.911
Fuel bypass orifice diameter, in.	1.750	1.750	1.750	1.750	1.750	1.500	1.500	1.500	1.500	1.500	1.500
Tapoff valve open angle, deg	58 **(1.321)	58 (1.321)	64 (1.260)	64 (1.260)	64 (1.260)	58 (1.321)	58 (1.321)	58 (1.321)	58 (1.321)	58 (1.321)	58 (1.321)
Duration of VSC, before engine cutoff signal, msec*	None	315	None	1	None	345	None	475	None	None	270
Premature cutoff	No	Yes	No	No	No	Yes	No	Yes	No	No	Yes
Oxidizer pump bearing cavity temperature at t-0 -5, °F	-288	-116	-288	-84	-278	96	-276	-128	-289	-292	-63
Fuel pump balance piston cavity temperature at t-0 -5, °F	-398	-120	-171	-80	-411	92	-406	-119	-200	-354	-76

\* Data reduced from oscillograph

\*\* Tapoff valve mechanical stop length, in.

Improper engine orificing resulted in a mixture ratio of approximately 4.6 during main-stage operation with the propellant utilization valve in the null position (mixture ratio nominally 5.0). Main-stage performance data were calculated as shown in Appendix IV. Stabilized chamber pressure was attained by  $t-0 + 7$  sec. Data between  $t-0 + 7.5$  and  $t-0 + 8.5$  sec were averaged, and performance data were calculated using these averages. The characteristic velocity, engine thrust, and specific impulse were approximately 7800 ft/sec, 230,000 lbf, and 434 lbf-sec/lbm, respectively.

#### 4.2.2 Firing J4-1001-06B

The objectives for this firing were to (1) verify stable idle-mode operation, (2) confirm that oxidizer injection temperatures were not excessive during transition to post-main-stage idle mode and (3) evaluate main-stage performance. This firing was conducted at thermal conditions expected for an orbital restart mission. The oxidizer pump bearing coolant temperature (TOPBC) and the fuel pump balance piston sump temperature (TFPBS) were used as indicators of propellant turbomachinery thermal conditions. To achieve the required conditions, propellants were not admitted to the engine until 5 sec before engine start signal.

Stabilized idle-mode operation was attained 36 sec after engine start signal. Chamber pressure oscillations remained less than  $\pm 1$  psi (18 to 20 psia) until 49 sec after engine start signal. Before 36 sec and after 49 sec, chamber pressure oscillations were greater than  $\pm 1$  psi. Superheated oxidizer was present at the engine flowmeter during idle-mode operation. This prevented determination of oxidizer flow rate and calculation of idle-mode performance data.

A premature engine cutoff was initiated 1.5 sec after main-stage start signal by the vibration safety cutoff system. Liquid fuel conditions existed at the fuel injector during oxidizer dome prime (chamber pressure = 100 psia) when the excessive vibrations were first recorded.

#### 4.2.3 Firing J4-1001-07A

The objectives for this firing were to (1) verify stable idle-mode operation, (2) confirm that oxidizer injection temperatures were not excessive during transition to post-main-stage idle-mode operation, and (3) evaluate main-stage performance. The stage prevalves were opened approximately 60 min before engine start signal to precondition the propellant feed systems.

Stabilized idle-mode operation was attained 20 sec after engine start signal. Chamber pressure oscillations remained less than  $\pm 1$  psi (29 to 31 psia) until 39 sec after engine start signal. Before 20 sec and after 39 sec, chamber pressure oscillations were approximately  $\pm 2$  psi. Unsteady fuel flow during idle mode prevented the evaluation of engine performance.

Stabilized post-main-stage idle-mode operation was not attained. Chamber pressure oscillations with amplitudes up to  $\pm 7$  psi at a frequency of 1 Hz were observed for the

duration of post-main-stage idle-mode operation. Pressure oscillations in the fuel system ranged up to  $\pm 9$  psi in phase with the chamber pressure oscillations. Corresponding fuel injection temperature increases of up to  $100^{\circ}\text{F}$  were also observed. The thrust chamber external skin temperatures were increasing from 2 sec after main-stage cutoff signal until engine cutoff signal. The maximum throat temperature was  $-180^{\circ}\text{F}$  at engine cutoff signal. Thrust chamber heat transfer rates may have been affected by the continuously increasing engine ambient pressure and temperature. The maximum test cell pressure and temperature were 0.55 psia and  $240^{\circ}\text{F}$ , respectively, recorded at engine cutoff signal. Unsteady fuel flow prevented idle-mode performance evaluation.

Excessive oxidizer injection temperatures were not observed during the transition to post-main-stage idle mode. Only a slight ( $<5^{\circ}\text{F}$ ) increase was recorded.

Comparison of fuel flow and the corresponding pressure drop across the fuel injector with previous main-stage firings revealed that the indicated pressure loss was abnormally low for the measured flow rate. Calculation of main-stage performance data resulted in an abnormally high specific impulse and characteristic velocity. This indicated a probable error in measured combustion chamber pressure. The error appears to be on the order of +7 percent and is suspected to be associated with icing of the chamber pressure measurement tap. If the chamber pressure tap iced over completely, the chamber pressure transducer would sense fuel injection pressure because of the purge line interconnect between the fuel injector and the chamber pressure measurement line (see Fig. III-1i). Engine mixture ratio was 4.8 with the propellant utilization valve in the null position.

#### 4.2.4 Firing J4-1001-07B

The objectives for this firing were to (1) verify stable idle-mode operation, (2) confirm that oxidizer injection temperatures were not excessive during transition to post-main-stage idle mode, and (3) evaluate main-stage performance. This firing was conducted at thermal conditions expected for an orbital restart mission. The oxidizer pump bearing coolant temperature (TOPBC) and the fuel pump balance piston sump temperature (TFPBS) were used as indicators of propellant turbomachinery thermal conditions. To achieve the required conditions, propellants were not admitted to the engine until 5 sec before engine start signal.

Stabilized idle-mode operation was attained 40 sec after engine start signal. The chamber pressure was gradually increasing for the initial 40 sec. Oscillations with amplitudes greater than  $\pm 2$  psi were observed during portions of this time period. After the initial 40 sec, chamber pressure was steadily increasing with oscillations of less than  $\pm 1$  psi. Superheated propellants were present at the engine flowmeters during idle-mode operation. This prevented determination of propellant flow rates and subsequent calculation of idle-mode performance data.

Stabilized post-main-stage idle-mode operation was not achieved. Oscillations in chamber pressure with amplitudes up to  $\pm 4$  psi were observed for the duration of post-main-stage idle-mode operation. Oscillations in the fuel system pressures ranged in

amplitude up to  $\pm 8$  psi and in phase with the chamber pressure oscillations. Corresponding fuel injection temperature increases of up to  $200^{\circ}\text{F}$  were also observed. The thrust chamber throat external skin temperature was increasing from 1 sec after main-stage cutoff signal until engine cutoff signal. The maximum throat temperature was  $-138^{\circ}\text{F}$  at engine cutoff signal. Thrust chamber heat transfer rates may have been affected by abnormally high transient engine ambient pressure and temperature. A maximum pressure of 1.31 psia and  $570^{\circ}\text{F}$  were recorded approximately 3.5 sec after main-stage cutoff signal. Unsteady fuel flow prevented idle-mode performance evaluation.

Excessive oxidizer injection temperatures were not observed during the transition to post-main-stage idle mode. The maximum increase was approximately  $10^{\circ}\text{F}$  and coincided with the peak in engine ambient pressure and temperature.

An average chamber pressure of 1182 psia was attained before transition to post-main-stage idle mode. This resulted in a characteristic velocity of approximately 7740 ft/sec and a specific impulse of approximately 433 lbf-sec/lbm. The thrust was calculated to be approximately 249,000 lbf. The mixture ratio was approximately 4.9 with the propellant utilization valve in the null position (nominal mixture ratio of 5.0).

#### 4.2.5 Firing J4-1001-07C

The objectives for this firing were to (1) verify stable idle-mode operation and (2) evaluate main-stage performance. The stage prevalues were open (for 45 min) until 15 min before engine start signal to precondition the propellant feed systems.

Stabilized idle-mode operation was not attained. During the initial 22 sec of operation, chamber pressure was increasing and oscillating with amplitudes up to  $\pm 1.5$  psia and frequencies ranging from 1 to 2 Hz. Beginning at  $t-0 + 22$  sec, the oscillations changed to amplitudes of  $\pm 3$  psi and a frequency of 1 Hz. These oscillations continued until transition to main stage. Similar oscillations in the fuel feed systems pressures were observed with a maximum amplitude of  $\pm 12$  psi recorded at the fuel pump discharge after  $t-0 + 22$  sec. Corresponding fuel injection temperature increases of up to  $100^{\circ}\text{F}$  were observed. The thrust chamber throat external skin temperature was increasing from  $t-0 + 22$  sec until transition to main stage. The maximum throat temperature was  $-184^{\circ}\text{F}$  at main-stage start signal. Unsteady fuel flow prevented calculation of idle-mode performance.

An average chamber pressure of 1279 psia was attained before engine cutoff signal. This resulted in a characteristic velocity of approximately 7720 ft/sec and a specific impulse of approximately 434 lbf-sec/lbm. The thrust was calculated to be approximately 271,000 lbf. The propellant utilization valve was inadvertently moved to the 12-deg closed position during the transition to main stage. This resulted in a mixture ratio of approximately 5.1.

#### 4.2.6 Firing J4-1001-11A

The objectives for this firing were to (1) verify stable idle-mode operation, (2) confirm that oxidizer injection temperatures were not excessive during transition to post-main-stage idle mode, (3) evaluate main-stage performance, and (4) determine rates at which the engine propellant feed system temperatures decreased during pre-main-stage idle-mode operation. This firing was conducted at thermal conditions expected for an orbital restart mission. The oxidizer pump bearing coolant temperature (TOPBC) and the fuel pump balance piston sump temperature (TFPBS) were used as indicators of propellant turbomachinery thermal conditions. To achieve the required conditions, propellants were not admitted to the engine until 5 sec before engine start signal. Oxidizer was supplied through the propellant recirculation system until  $t-0 + 92.5$  sec, at which time the stage oxidizer pre valve was opened. Fuel was supplied to the engine normally through the stage fuel pre valve.

Apparent valve closure in the oxidizer recirculation system resulted in abnormal oxidizer flow conditions during the initial 70 sec of idle-mode operation. Stabilized idle-mode operation was attained at  $t-0 + 70$  sec and continued until  $t-0 + 80$  sec. Random chamber pressure excursions up to 6 psi were observed, beginning at  $t-0 + 80$  sec and continuing until transition into main stage at  $t-0 + 98$  sec. Superheated propellants were present at the engine flowmeters during idle-mode operation. This prevented determination of propellant flow rates and subsequent calculation of idle-mode performance.

A premature engine cutoff was initiated at the request of the engine manufacturer because of low chamber pressure ( $<20$  psia) immediately before transition into main stage. The firing was terminated after 1.3 sec of main-stage operation. Approximately 340 msec of sporadic oxidizer dome vibration which exceeded 150 g rms was recorded before engine cutoff signal. Liquid fuel conditions existed at the fuel injector during oxidizer dome prime (chamber pressure = 100 psia) when the excessive vibrations were first observed. The premature engine cutoff precluded the attainment of the main-stage and post-main-stage idle-mode objectives.

The rates at which the propellant feed system temperatures decreased during pre-main-stage idle-mode operation were affected by increased engine ambient pressure and temperature between 15 and 55 sec after engine start signal. The maximum cell pressure and temperature were 1.11 psia and 172°F, respectively, during this time period. The effect on thrust chamber external exit skin temperature is shown in Fig. 34. In addition, the abnormal oxidizer flow conditions also affected chilling of the oxidizer feed system. These adverse conditions precluded determination of meaningful chilldown rates.

#### 4.2.7 Firing J4-1001-11B

The objectives for this firing were to (1) verify stable idle-mode operation, (2) evaluate main-stage performance, and (3) determine the rates at which the propellant feed system temperatures decreased during idle-mode operation. The stage pre valves were open between firings 11A and 11B until 15 min before engine start signal to precondition the propellant feed systems.

Stabilized idle-mode operation was not attained. Chamber pressure variations were observed throughout idle-mode operation. Maximum pressure excursions of 6 psi were recorded after  $t-0 + 47$  sec. Similar variations were observed in the fuel feed system with maximum pressure oscillations of 8 psi recorded at the fuel pump discharge. Unsteady fuel flow prevented determination of idle-mode performance.

Main-stage performance was considered questionable, based on the analysis of firing 07A main-stage performance data (Ref. Section 4.2.3). No changes in the injector or pressure measurement configuration were implemented between firings 07A and 11B.

Subcooled oxidizer was present at the pump inlet and discharge and the oxidizer idle-mode supply line within 5 sec after engine start signal. Subcooled fuel was present at the pump inlet and discharge after 20 sec of idle-mode operation. Saturated or liquid conditions at the oxidizer injector existed from  $t-0 + 3$  sec until engine cutoff signal. Superheated fuel was present at the fuel injector during idle-mode operation. Increased oscillations in the fuel injection temperature were observed to correspond with increasing thrust chamber throat external skin temperature.

#### 4.2.8 Firing J4-1001-11C

The objectives for this firing were to (1) verify stable idle-mode operation, (2) evaluate main-stage performance, and (3) determine rates at which the engine propellant feed system temperatures decreased during idle-mode operation. This firing was conducted at thermal conditions expected for an orbital restart mission. The oxidizer pump bearing coolant temperature (TOPBC) and the fuel pump balance piston sump temperature (TFPBS) were used as indicators of propellant turbomachinery thermal conditions. To achieve the required conditions, propellants were not admitted to the engine until 5 sec before engine start signal.

Stabilized idle-mode operation was attained 25 sec after engine start signal and continued until 81 sec after engine start signal. The chamber pressure was increasing and oscillated with amplitudes greater than  $\pm 1$  psi and frequency between 0.5 and 1 Hz during the initial 25 sec. Beginning at  $t-0 + 81$  sec, sporadic pressure excursions up to 6 psi were observed. A 4-psi step increase in chamber pressure average level, with increased oscillations, began 89 sec after engine start signal. These oscillations, at a frequency of approximately 4 Hz with amplitudes up to  $\pm 1$  psi, continued until transition into main stage. Superheated oxidizer at the flowmeter precluded determination of idle-mode performance.

A premature engine cutoff was initiated by the vibration safety cutoff system after 1.7 sec of main-stage operation. Liquid fuel conditions existed at the fuel injector at dome prime (chamber pressure = 100 psia), when the excessive oxidizer dome vibrations were first recorded. The premature cutoff precluded attainment of the main-stage objective.

Subcooled oxidizer conditions were present by  $t-0 + 2$  sec at the pump inlet and oxidizer idle-mode supply line. Liquid oxidizer conditions were not present at the pump

discharge until  $t-0 + 94$  sec. Saturated or liquid conditions existed from  $t-0 + 3$  sec until engine cutoff signal at the oxidizer injector. Liquid or saturated conditions were present by 20 sec after engine start signal at the fuel pump inlet and discharge. Saturated conditions at the fuel injector existed after 20 sec of idle-mode operation. The thrust chamber external skin temperatures indicated approximately  $-425^{\circ}\text{F}$  after 30 sec of idle-mode operation.

#### 4.2.9 Firing J4-1001-15A

The objective of this firing was to document the transition from idle mode to main stage with the solid-propellant turbine starter ignition signal delayed 0.5 sec after main-stage start signal (normally the ignition signal is initiated at main-stage start signal). The stage prevalves were open for approximately 60 min before engine start signal to precondition the propellant feed system.

The ignition delay of 0.502 sec after main-stage start signal was sufficient to allow the main oxidizer valve to open to its first stage position and the hot gas tapoff valve to attain its maximum opening before the solid-propellant turbine starter ignited. Tapoff manifold and fuel turbine inlet temperatures indicated that hot gas from the combustion chamber entered the fuel turbine before the delayed ignition signal. However, there was no significant increase in fuel turbine speed until the solid-propellant turbine starter ignited.

Engine conditions at engine start signal were essentially the same as for firings 06A and 15A of this series. The fuel pump inlet pressure was 29.9 psia for firing 15A, and 33.0 psia for firing 06A. The solid-propellant turbine starter ignition signal was not delayed for firing 06A. Comparison of solid-propellant turbine starter chamber pressures on these two firings revealed that the initial peak was 200 psi greater with the ignition delay. This resulted in a faster increase in fuel pump speed and a shorter time to oxidizer dome prime relative to the ignition signal. Oxidizer dome prime (combustion chamber pressure = 100 psia) occurred approximately 0.9 sec after the delayed ignition signal as opposed to 1.1 sec without the delay. Programmed engine cutoff signal at main-stage control signal of firing 15A was initiated before the solid-propellant turbine starter had completed burning. Between oxidizer dome prime and main-stage control signal, the combustion chamber pressure histories for these two firings were essentially the same. The maximum chamber pressure at main-stage control signal was approximately 330 psia with the delayed ignition signal, and 310 psia without the ignition delay. The fuel pump speeds differed by approximately 200 rpm at main-stage control signal; the pump speed was approximately 15,800 rpm for the delayed ignition firing (15A).

#### 4.2.10 Firing J4-1001-15B

The objectives of this firing were to (1) evaluate the effect of a 0.911-in. oxidizer idle-mode supply line orifice on the rate at which the thrust chamber temperatures increased during idle mode with high (44 psia) oxidizer and low (28 psia) fuel pump inlet conditions and (2) to document the effect of a 0.911-in. oxidizer idle-mode supply line orifice on transition to main stage employing a delayed ignition signal to the

solid-propellant turbine starter. The thrust chamber was prechilled to  $-187^{\circ}\text{F}$  at engine start signal. The stage prevalues were closed 30 min before engine start signal after having been open for approximately 30 min.

Previous firings (J4-1001-13B, -13C, and -14B) which had comparable objectives are found in Ref. 8. Firings J4-1001-13B and -13C were conducted with a 1.033-in. oxidizer idle-mode supply line orifice; firing J4-1001-14B utilized a 0.977-in. orifice (Ref. 8). Each of these firings was prematurely terminated as a result of excessive thrust chamber throat external skin temperature. The established temperature limit was  $300^{\circ}\text{F}$  for both 13B and 13C, but was lowered to  $250^{\circ}\text{F}$  for both 14B and 15B. The following table summarizes the significant variables and results.

<u>Firing J4-1001-</u>	<u>13B</u>	<u>13C</u>	<u>14A</u>	<u>15B</u>
Oxidizer pump discharge pressure, psia	44.0	45.3	43.5	44.5
Fuel pump discharge pressure, psia	21.5	29.9	30.8	30.0
Oxidizer idle-mode supply line orifice, in.	1.033	1.033	0.977	0.911
Thrust chamber throat temperature at t-0, $^{\circ}\text{F}$	34	80	-200	-187
Propellants on engine, min	70	60	70	*
Time to $250^{\circ}\text{F}$ , thrust chamber, sec	17	21	46	**
Maximum thrust chamber heatup rate, $^{\circ}\text{F}/\text{sec}$	22	15	17	6

\* For 30 min, prevalues closed 30 min before engine start.

\*\* Maximum temperature attained was  $10^{\circ}\text{F}$ .

Transition to main stage was smooth and stable. Programmed engine cutoff occurred at main-stage control signal. The delayed ignition signal to the solid-propellant turbine starter resulted in start transient effects similar to those experienced during firing 15A as stated in Section 4.2.9.

#### 4.2.11 Firing J4-1001-15C

The objective for this firing was to demonstrate stable transition to main stage after 100 sec of idle mode with low (34 psia) oxidizer and nominal (33 psi) fuel pump inlet pressures, a 0.911-in. oxidizer idle-mode supply line orifice, and a delayed ignition signal to the solid-propellant turbine starter. This firing was conducted at thermal conditions expected for an orbital restart mission. The oxidizer pump bearing coolant temperature (TOPBC) and the fuel pump balance piston sump temperature (TFPBS) were used as indicators of propellant turbomachinery thermal conditions. To achieve the required conditions, propellants were not admitted to the engine until 5 sec before engine start signal.

Chamber pressure steadily increased until approximately 92.5 sec after engine start signal. At this time, there was a step increase of 4 psi in the average level of chamber pressure. Subcooled fuel conditions were attained at the fuel flowmeter after approximately 92.5 sec of idle-mode operation. Subcooled oxidizer was not attained at the oxidizer flowmeter until approximately 2.5 sec later. Saturated (mixed phase) propellants existed at the injector from t-0 + 20 sec until transition into main stage.



A premature engine cutoff was initiated after 1.8 sec of main stage by the vibration safety cutoff system. Liquid fuel conditions existed at the fuel injector during oxidizer dome prime when the excessive vibrations were first observed.

### 4.3 ENGINE DAMAGE

Examination of the thrust chamber combustion zone after test 07A revealed hairline cracks in several of the thrust chamber tubes. This damage was insufficient to require immediate repair.

Extensive thrust chamber damage was sustained during test period J4-1001-09 and J4-1001-13, Ref. 8. This damage was repaired before tests J4-1001-11 and -15 of this series, but these repairs did not return the engine to an as-designed configuration. Small tube leaks and internal/external surface irregularities existed which may have altered specific tube fuel flow and heat transfer rates.

Examination of the injector assembly after test period J4-1001-15 by the engine manufacturer revealed that excessive leakage existed between the chamber pressure measurement tap and the fuel injection pressure measurement tap. Main-stage duration was insufficient to evaluate the probable error in chamber pressure data presented for test period J4-1001-15. However, the response and trend of the data are indicative of the engine start transient.

## SECTION V SUMMARY OF RESULTS

The results of the eleven firings of the J-2S rocket engine which were conducted during tests J4-1001-06, -07, -11, and -15 on August 25, 28, September 17, and October 29, 1969, respectively, are summarized as follows:

1. Brief durations (<20 sec) of stable idle-mode operation (chamber pressure oscillations  $< \pm 1$  psi) were achieved.
2. Oxidizer injection temperatures exhibited insignificant increases (<10°F) during transition to post-main-stage idle-mode operation.
3. The maximum rate at which the thrust chamber temperature increased during idle-mode operation with high (45-psia) oxidizer and low (27-psia) fuel pump inlet conditions was approximately 6°F/sec.
4. Three firings which were conducted at orbital restart conditions were prematurely terminated during the transition to main stage by the vibration safety cutoff system. Liquid fuel conditions existed at the injector during dome prime (chamber pressure = 100 psia) when the excessive vibrations were first observed.


5. The 0.5-sec solid-propellant turbine starter ignition delay produced higher peak starter chamber pressure, a faster increase in fuel pump speed, and a shorter time to oxidizer dome prime (relative to the ignition signal) compared to a firing with no ignition delay.

#### REFERENCES

1. Dubin, M., Sissenwine, N., and Wexler, H. "U. S. Standard Atmosphere, 1962." December 1962
2. "J-2S Interface Criteria." Rocketdyne Document J-7211, October 16, 1967.
3. "Engine Model Specification Oxygen/Hydrogen Liquid-Propellant Rocket Engine Rocketdyne Model J-2S." Rocketdyne Document R-2158dS, August 21, 1968.
4. Test Facilities Handbook (8th Edition). "Large Rocket Facility, Vol. 3." Arnold Engineering Development Center, December 1969 (AD863646).
5. Vetter, N. R. "Altitude Developmental Testing of the J-2S Rocket Engine in Rocket Development Test Cell (J-4) (Tests J4-1902-01 through J4-1902-04)." AEDC-TR-69-44 (AD847562L), February 1969.
6. Tinsley, C. R. and Pillow, C. E. "Altitude Testing of the J-2S Rocket Engine in Rocket Development Test Cell (J-4) (Tests J4-1001-04 and J4-1001-05)." AEDC-TR-70-165, July 1970.
7. Kunz, C. H. and Counts, H. J., Jr. "Altitude Developmental Testing of the J-2S Rocket Engine in Rocket Development Test Cell (J-4) (Tests J4-1902-13 through J4-1902-15)." AEDC-TR-70-122, June 1970.
8. Kunz, C. H. and Saunders, J. F. "Altitude Developmental Testing of the J-2S Rocket Engine in Rocket Development Test Cell (J-4) (Tests J4-1001-08 through -10 and J4-1001-12 through -14)," AEDC-TR-70-150, June 1970.
9. Roder, Hans M. and Goodwin, Robert D. "Provisional Thermodynamic Functions for Para-Hydrogen." NBS TN130, December 1961.
10. Weber, L. A. "Thermodynamic and Related Properties of Oxygen from the Triple Point to 300°K at Pressures to 330 Atmospheres." NBS Report 9710, June 1968.

**APPENDIXES**

- I. ILLUSTRATIONS**
- II. TABLES**
- III. INSTRUMENTATION**
- IV. METHODS OF CALCULATIONS**

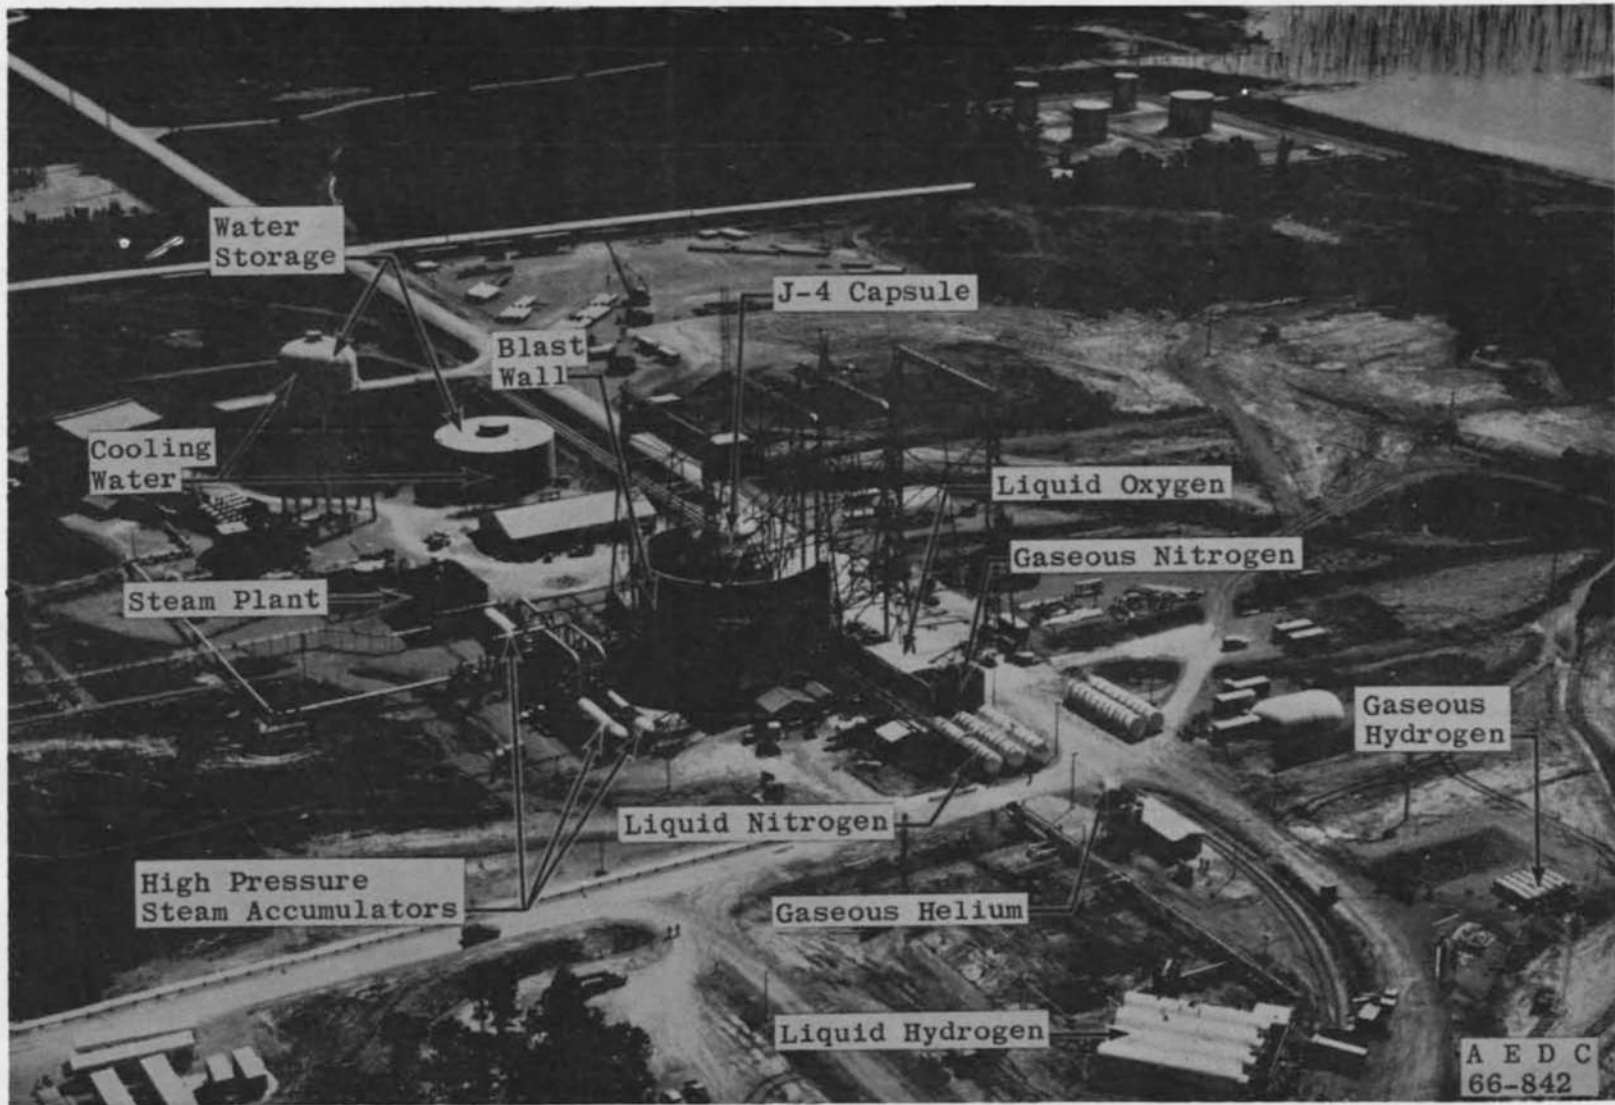

Water Storage

J-4 Capsule

Blast Wall

Cooling Water

Liquid Oxygen

Steam Plant

Gaseous Nitrogen

Gaseous Hydrogen

Liquid Nitrogen

High Pressure Steam Accumulators

Gaseous Helium

Liquid Hydrogen

A E D C  
66-842

Fig. 1 Test Cell J-4 Complex

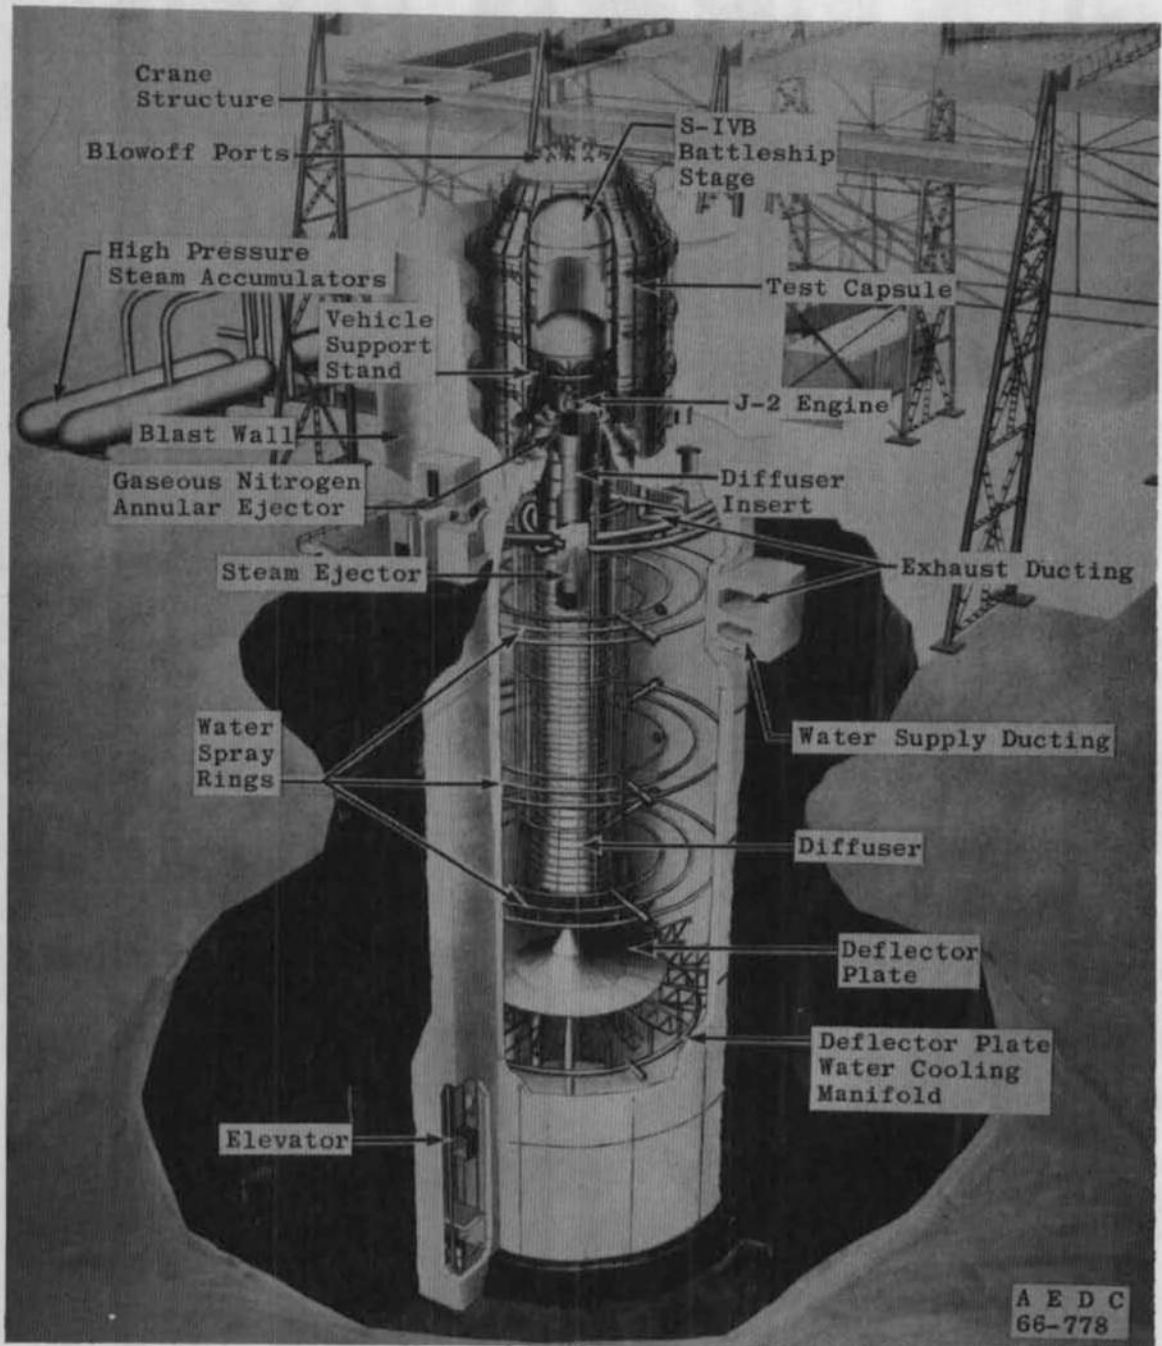


Fig. 2 Test Cell J-4, Artist's Conception

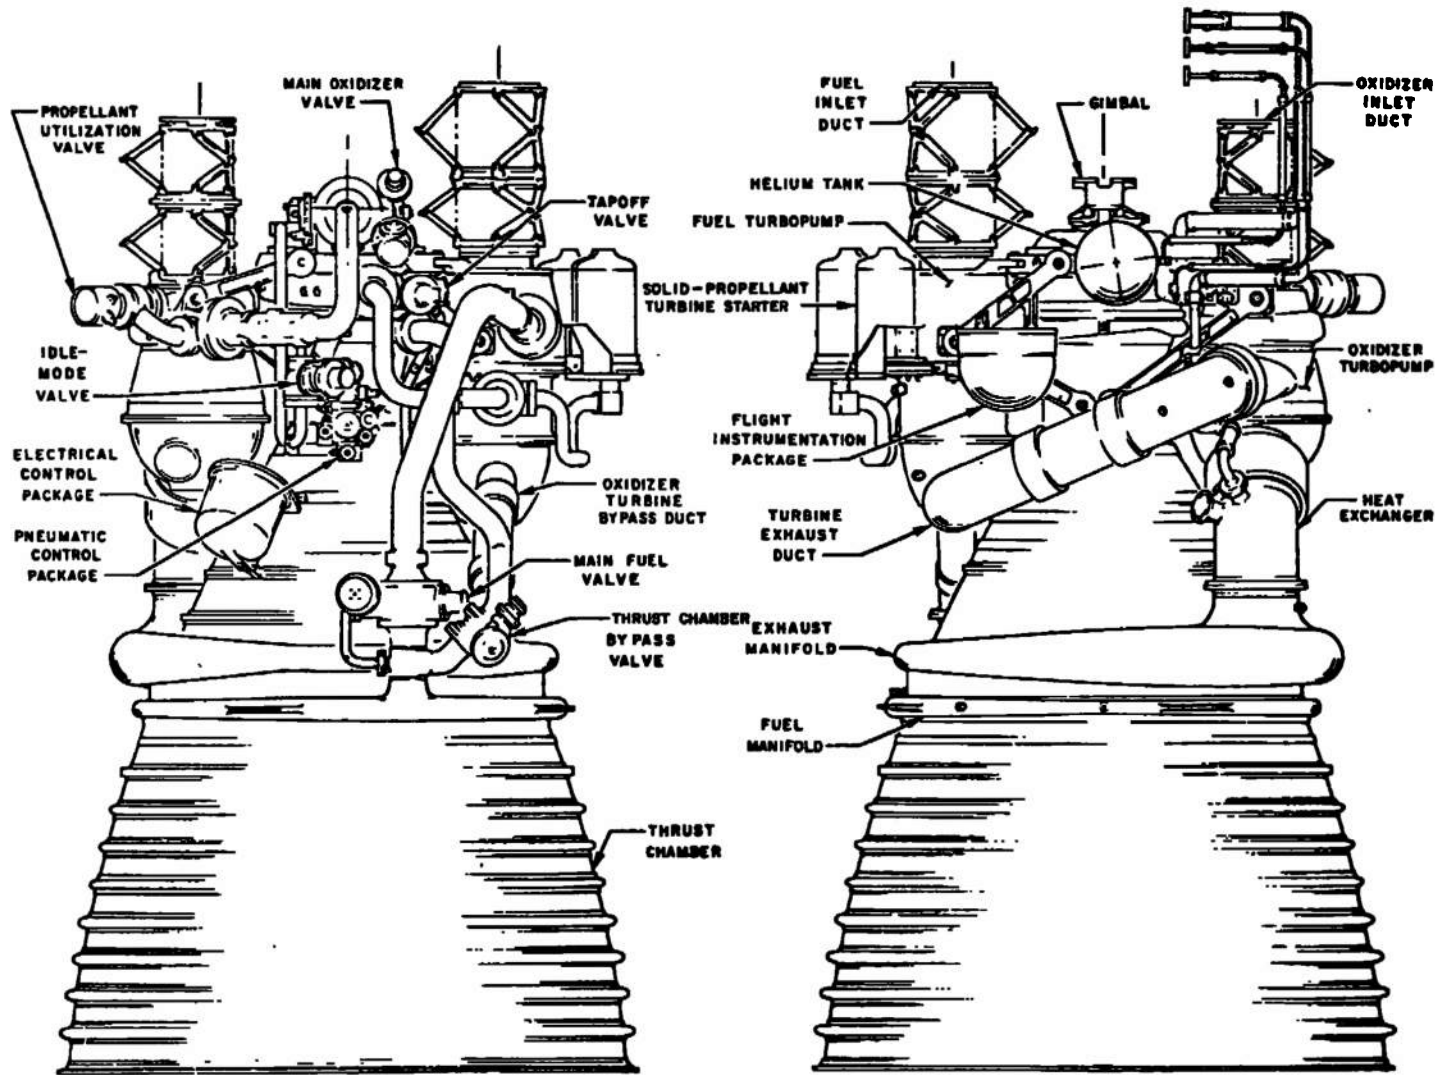


Fig. 3 J-2S Engine General Arrangement



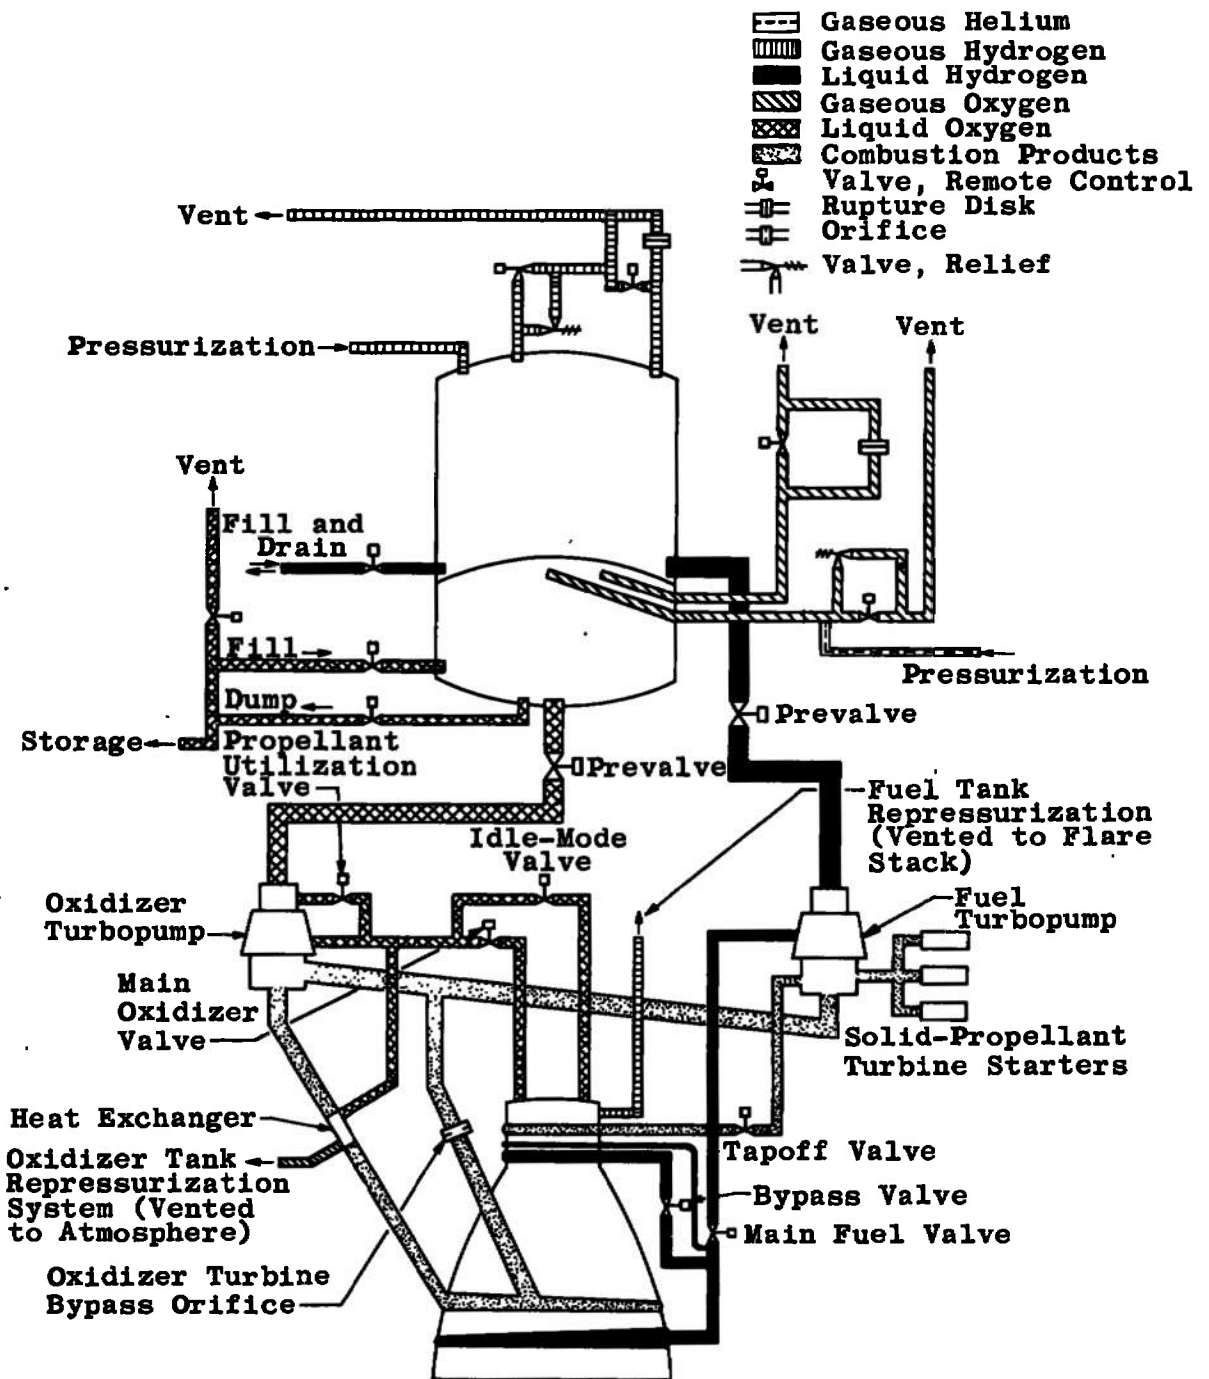


Fig. 4 S-IVB Battleship Stage/J-2S Engine Schematic




a. Thrust Chamber  
Fig. 5 Engine Details

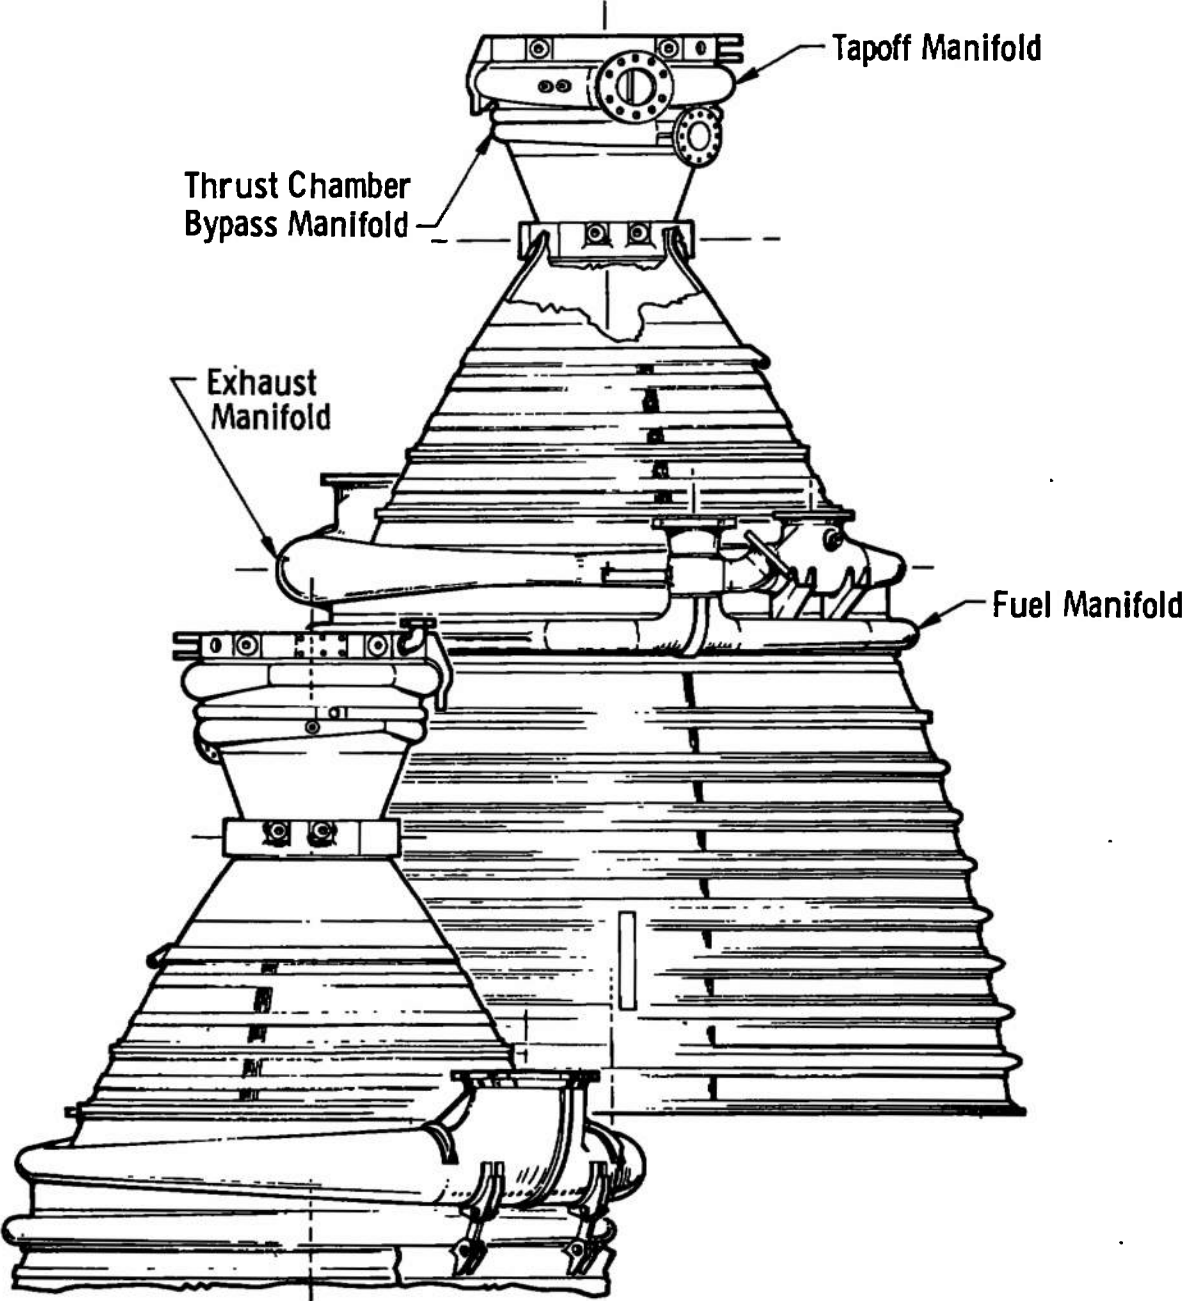


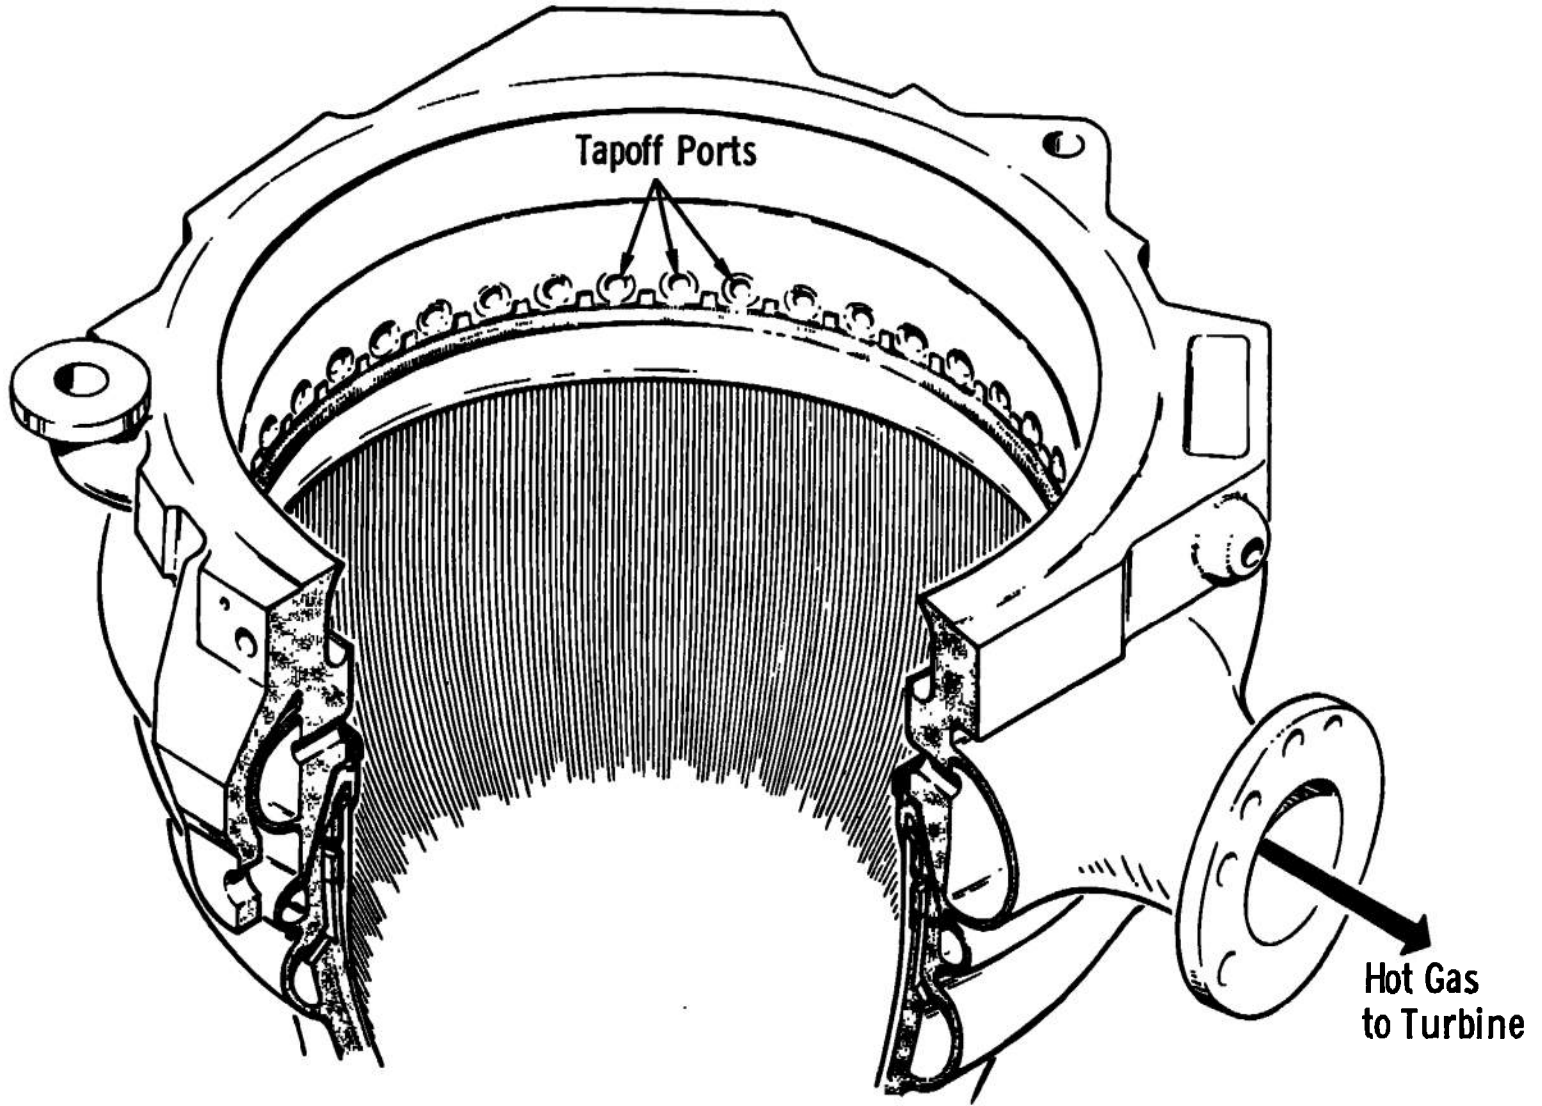

b. Combustion Chamber  
Fig. 5 Continued

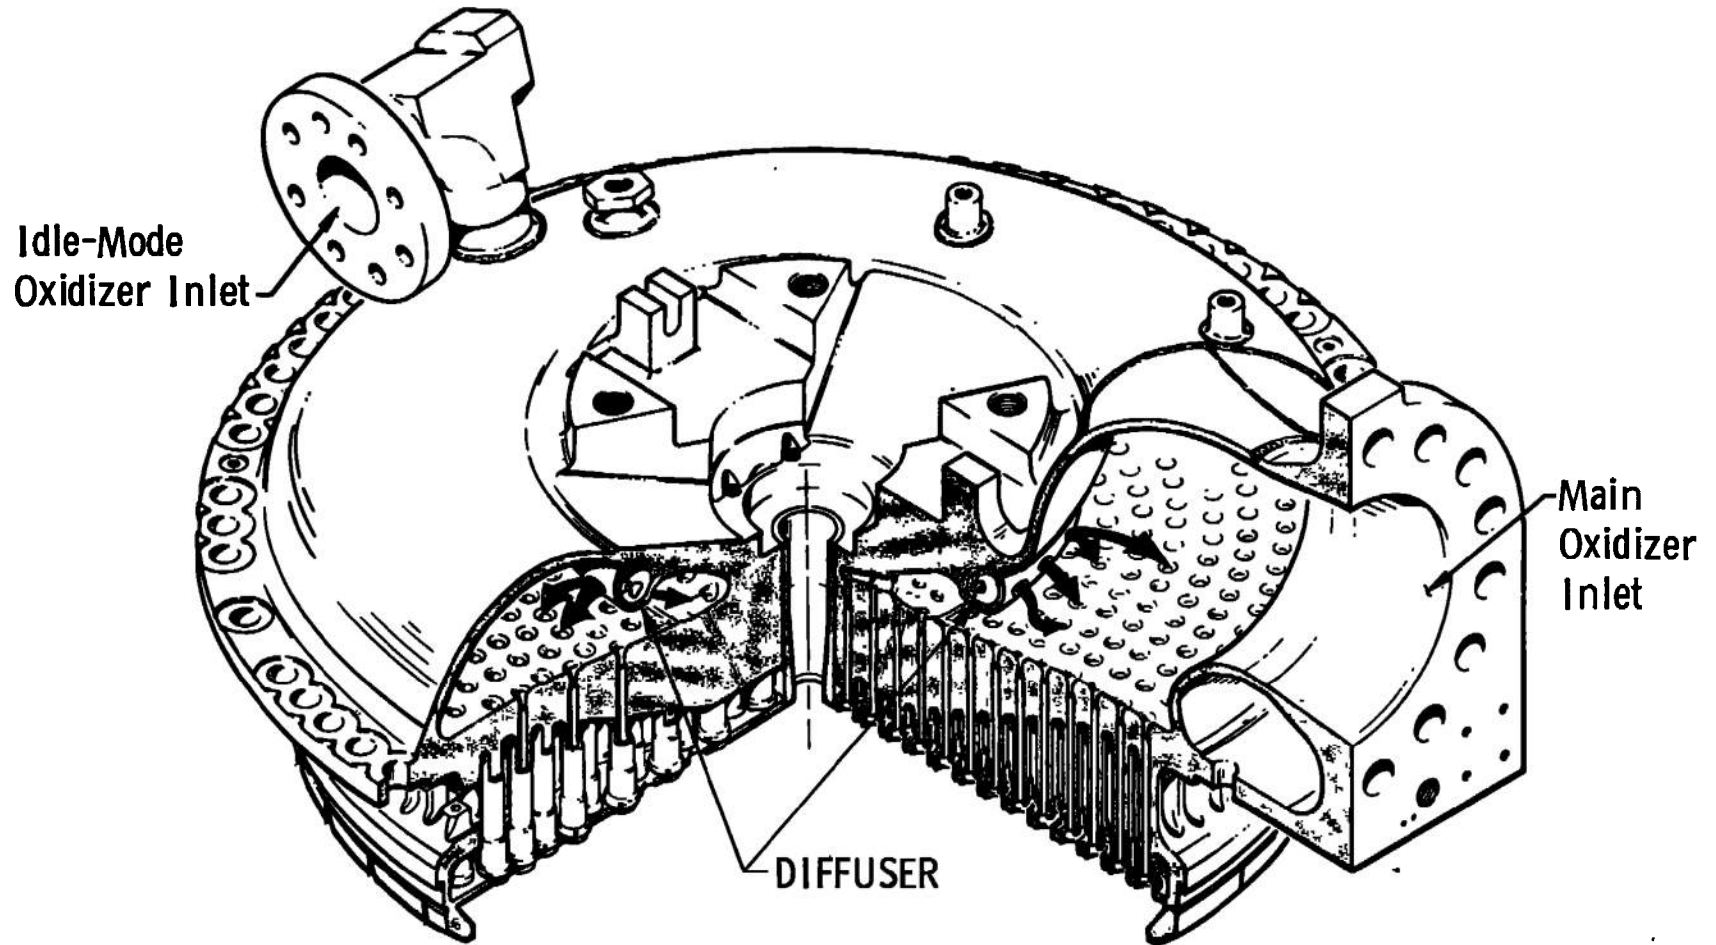

c. Full-Face Oxidizer Flow Injector Configuration  
Fig. 5 Continued

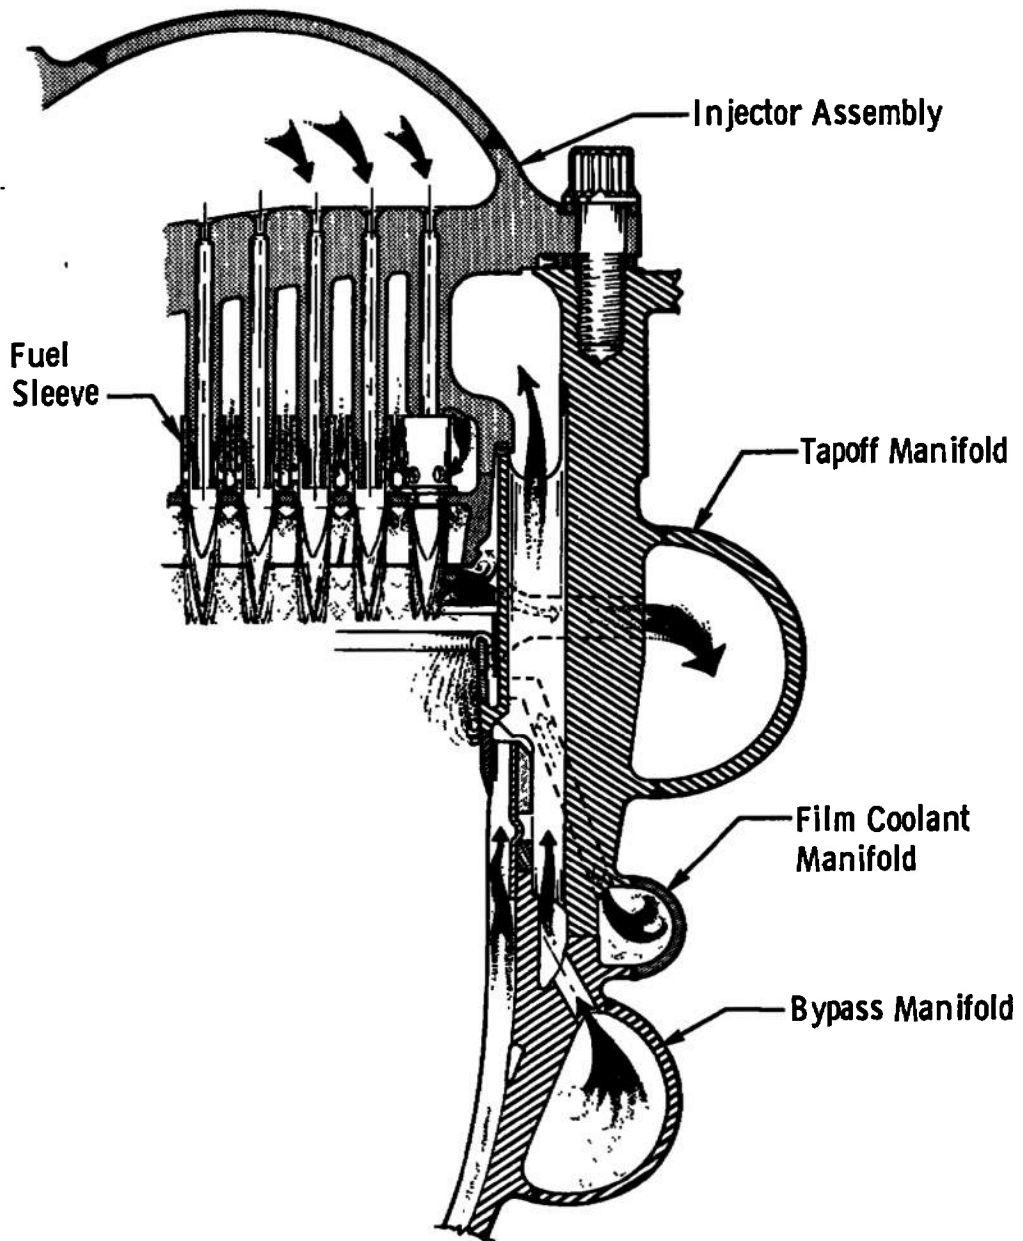

d. Injector to Chamber  
Fig. 5 Concluded



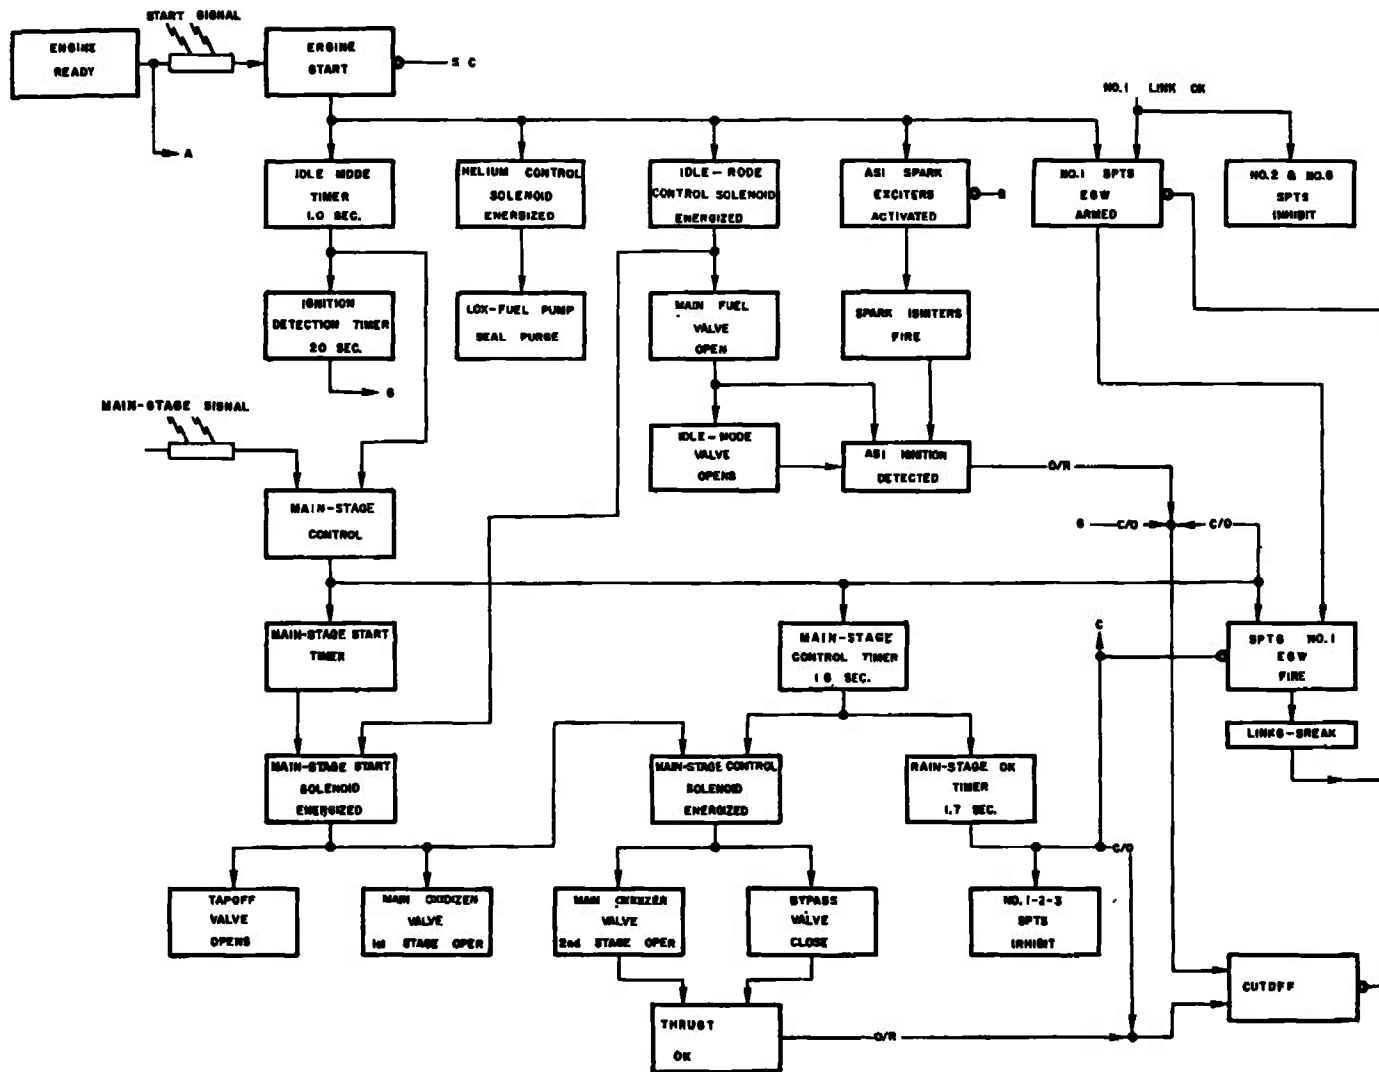


Fig. 6 Engine Start Logic Schematic

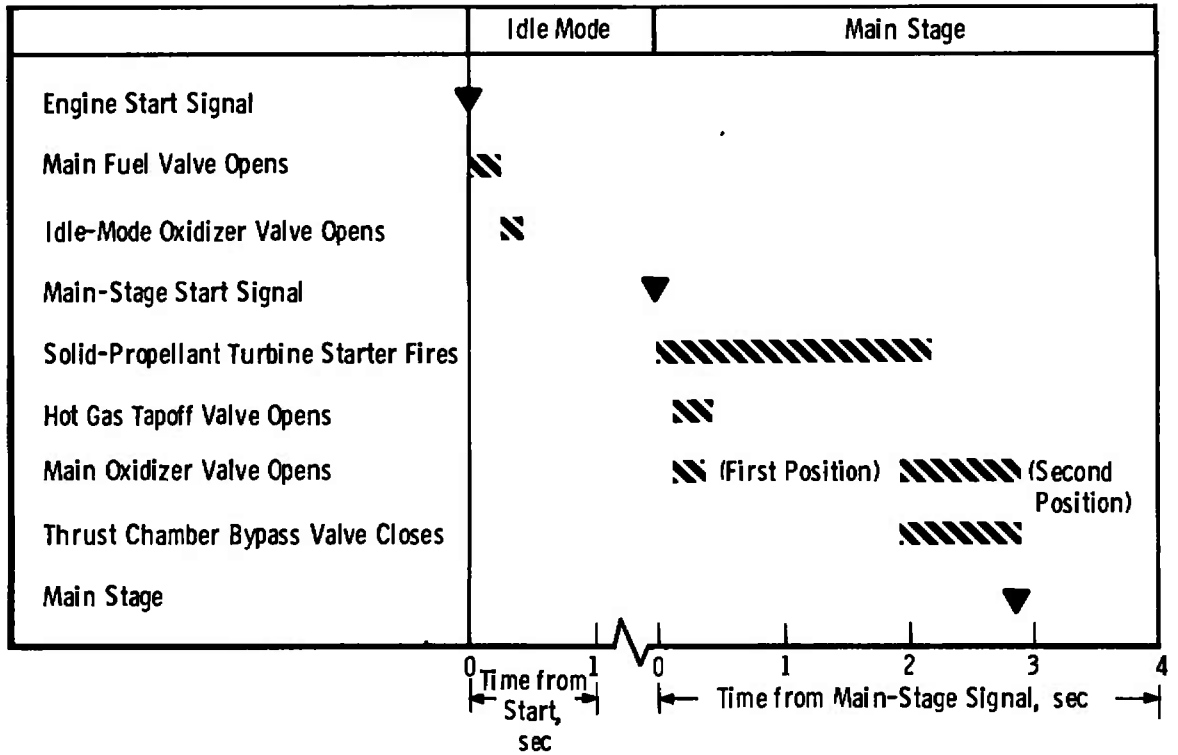


a. Start Sequence

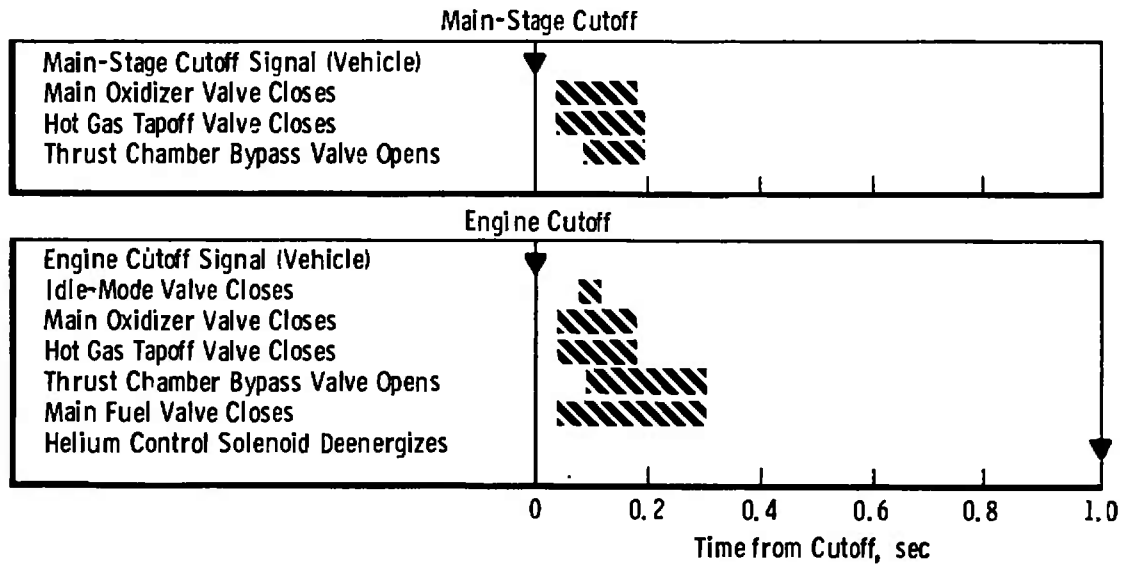


b. Shutdown Sequence


Fig. 7 Engine Start and Shutdown Sequence

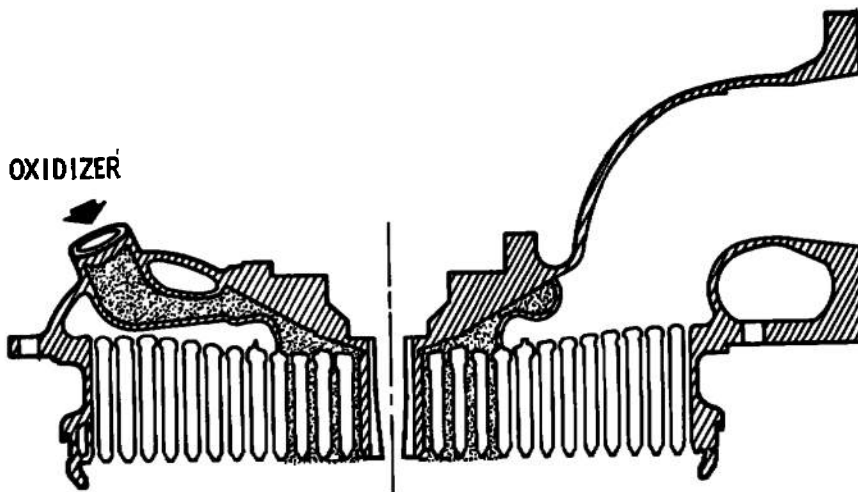


a. Inner Four Row

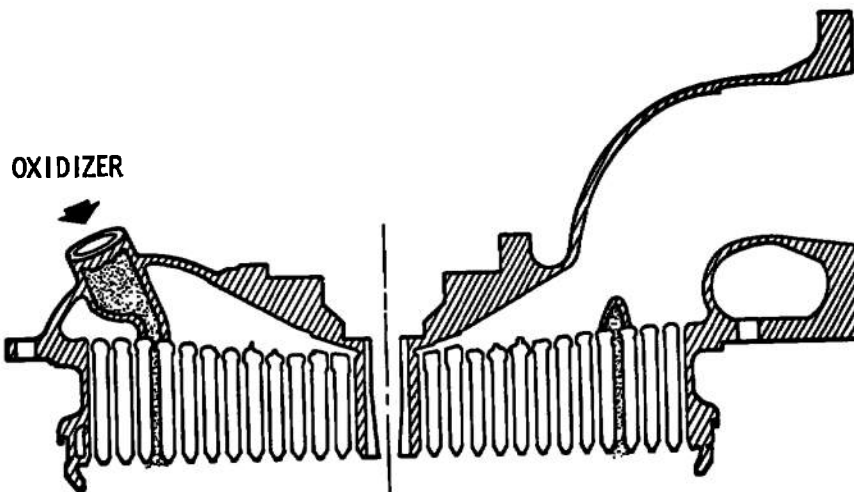

b. Row Ten Oxidizer Flow

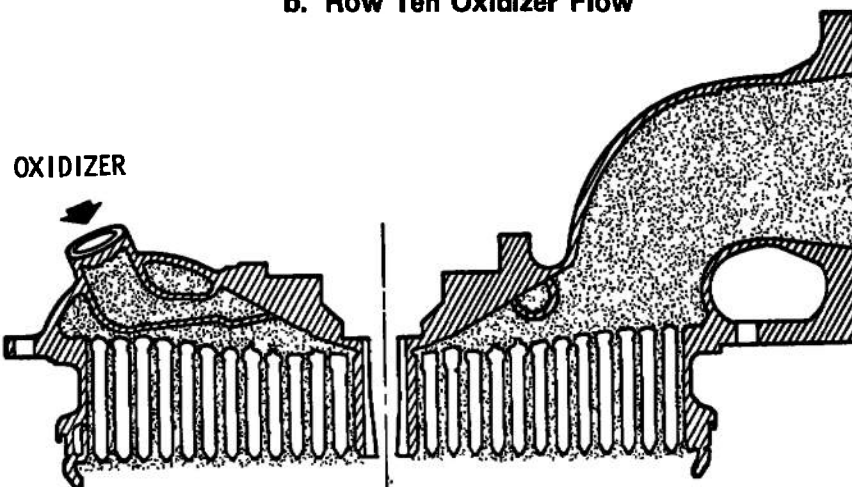


c. Full-Face Oxidizer Flow  
Fig. 8 Injector Configurations

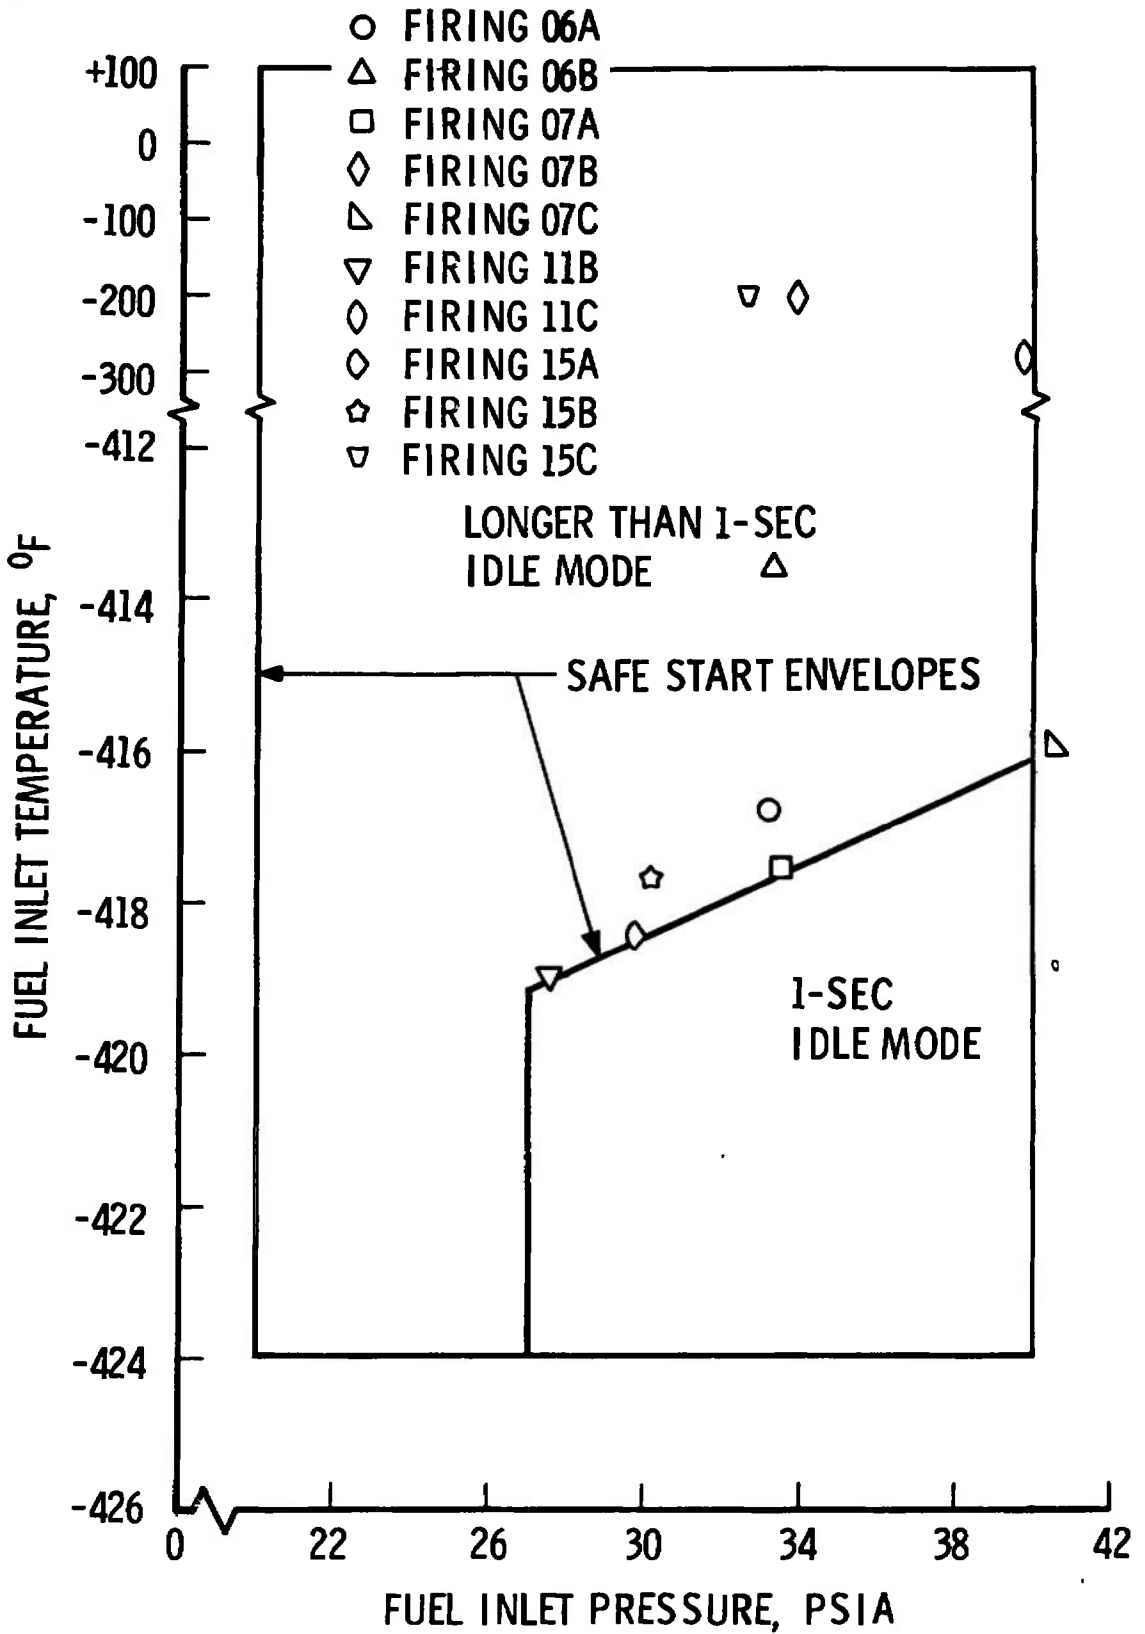


a. Fuel Pump

Fig. 9 Engine Start Conditions for Propellant Pump Inlets and Helium Tank

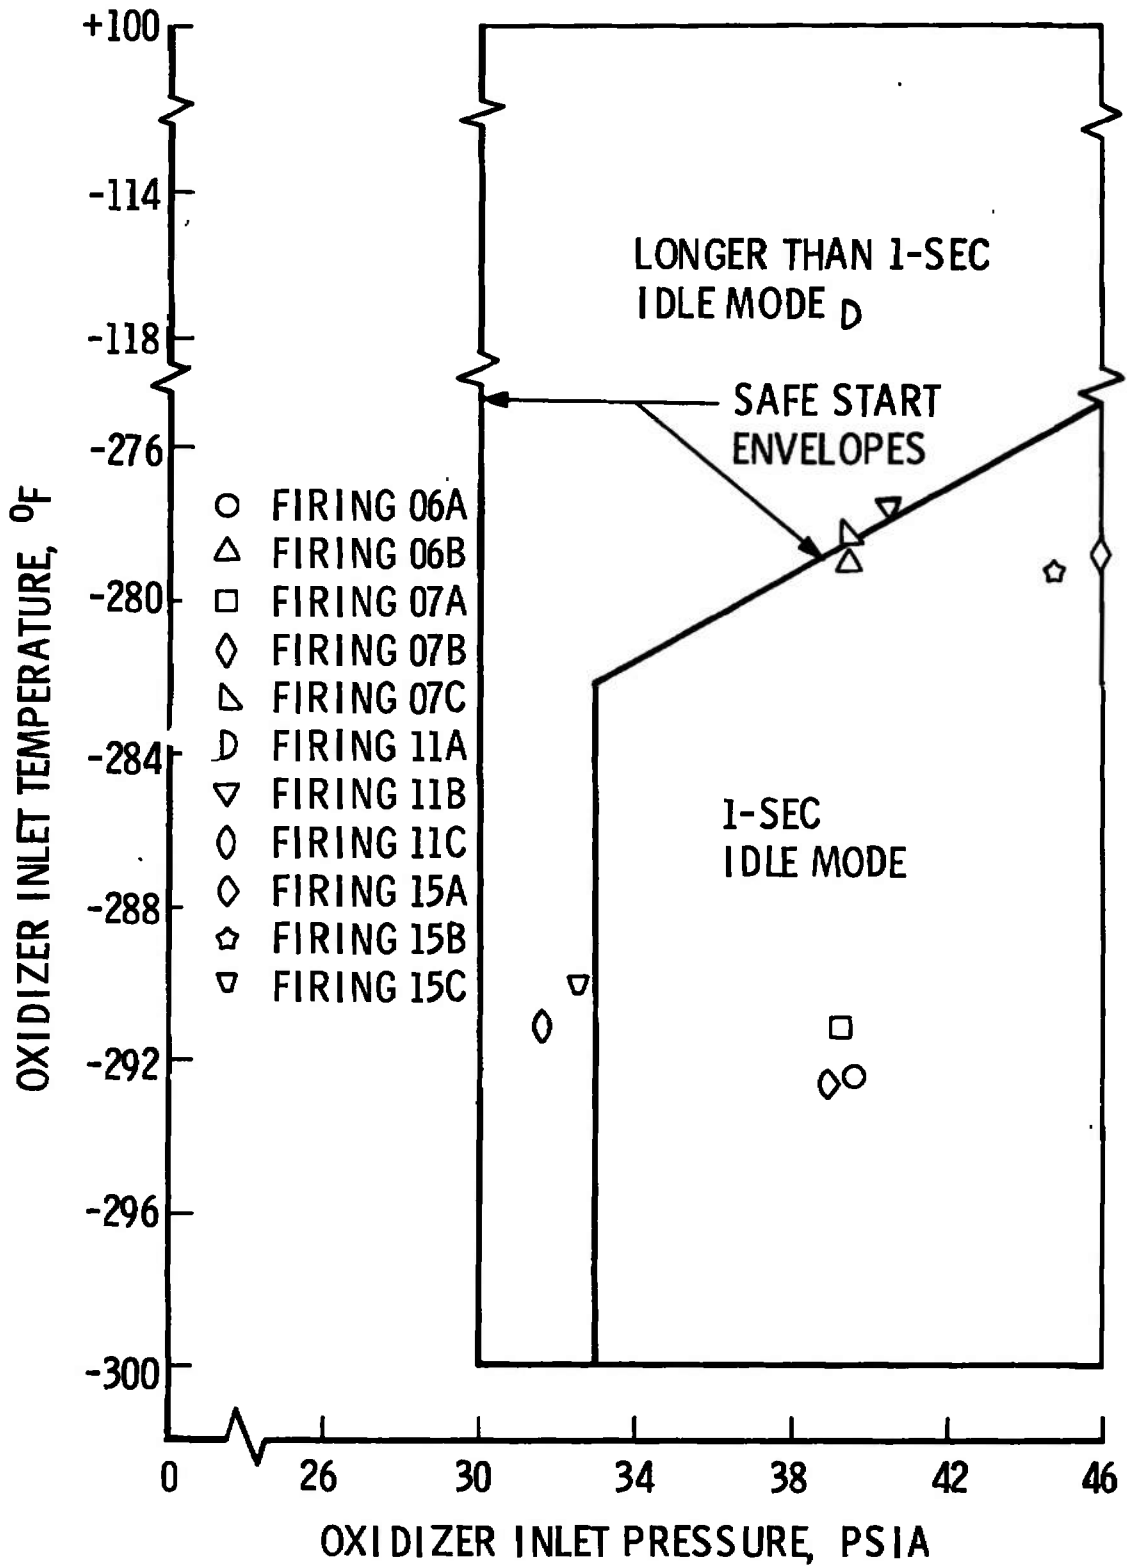


b. Oxidizer Pump  
Fig. 9 Continued




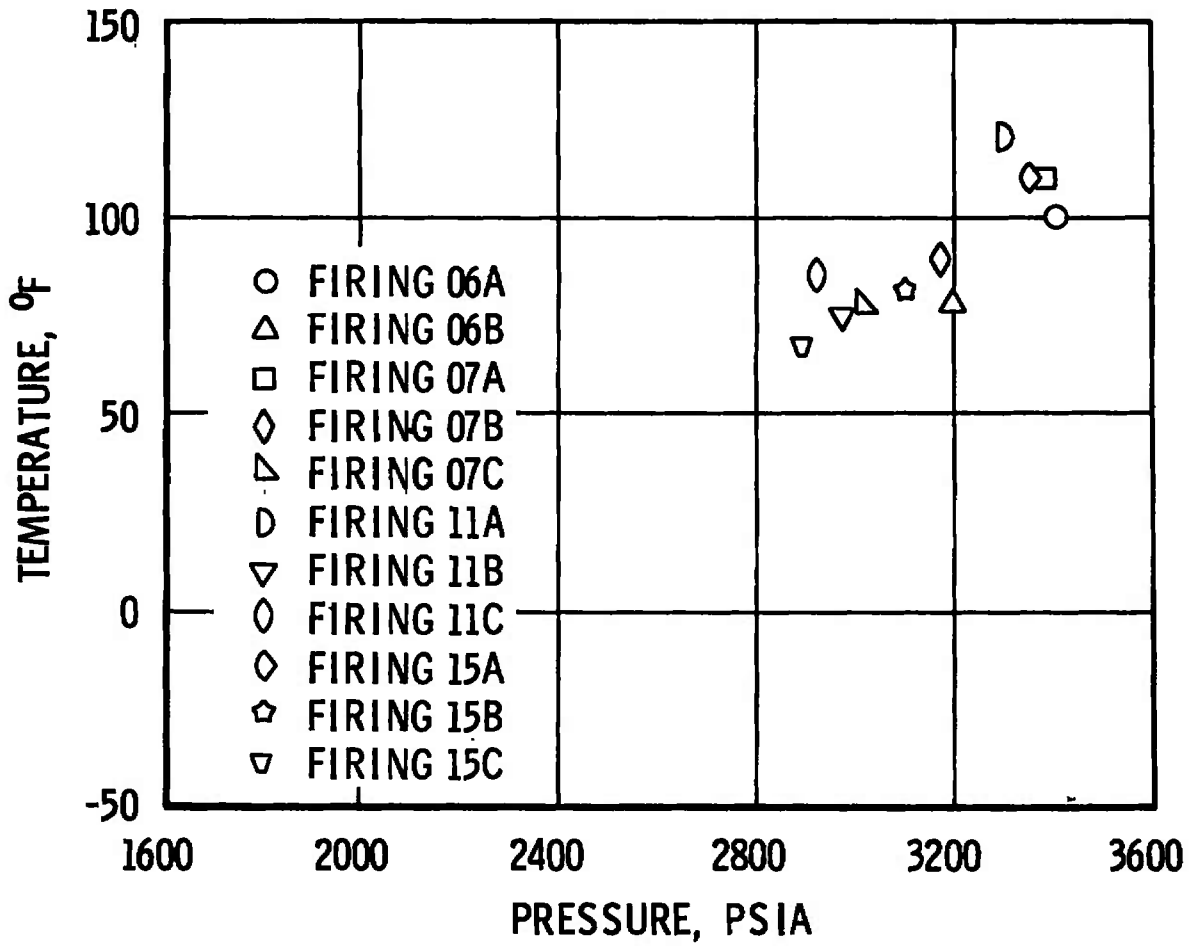

c. Helium Tank  
Fig. 9 Concluded

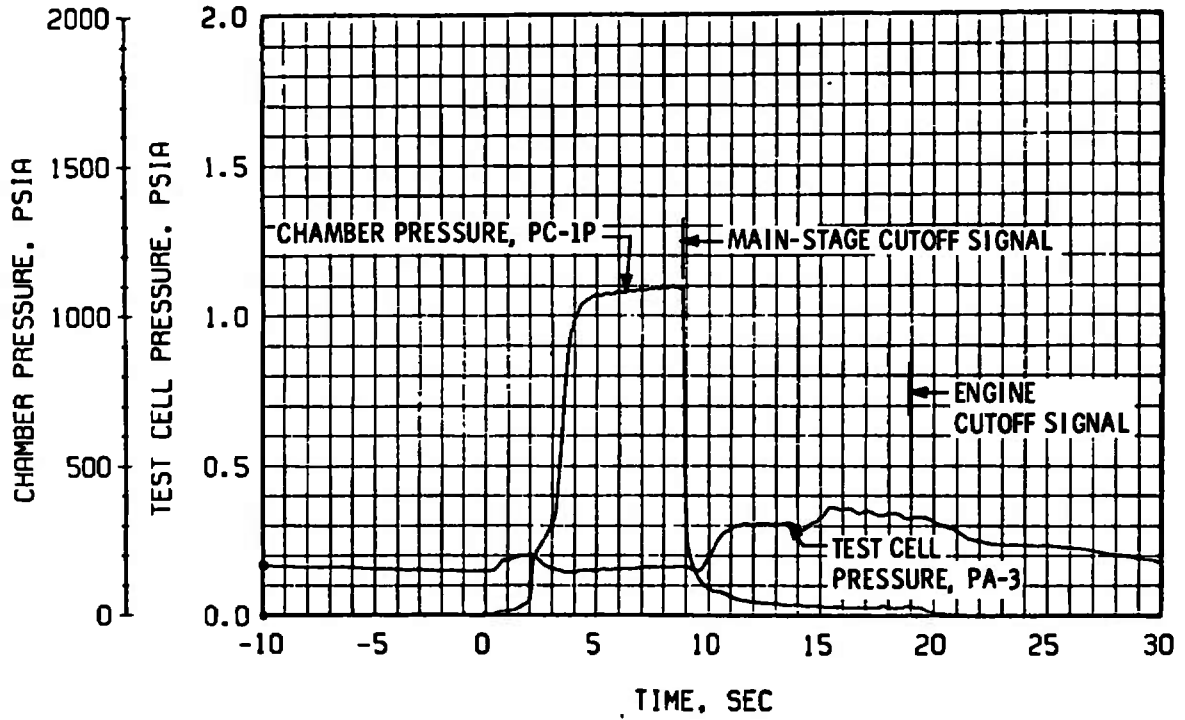


a. Total Duration of Firing

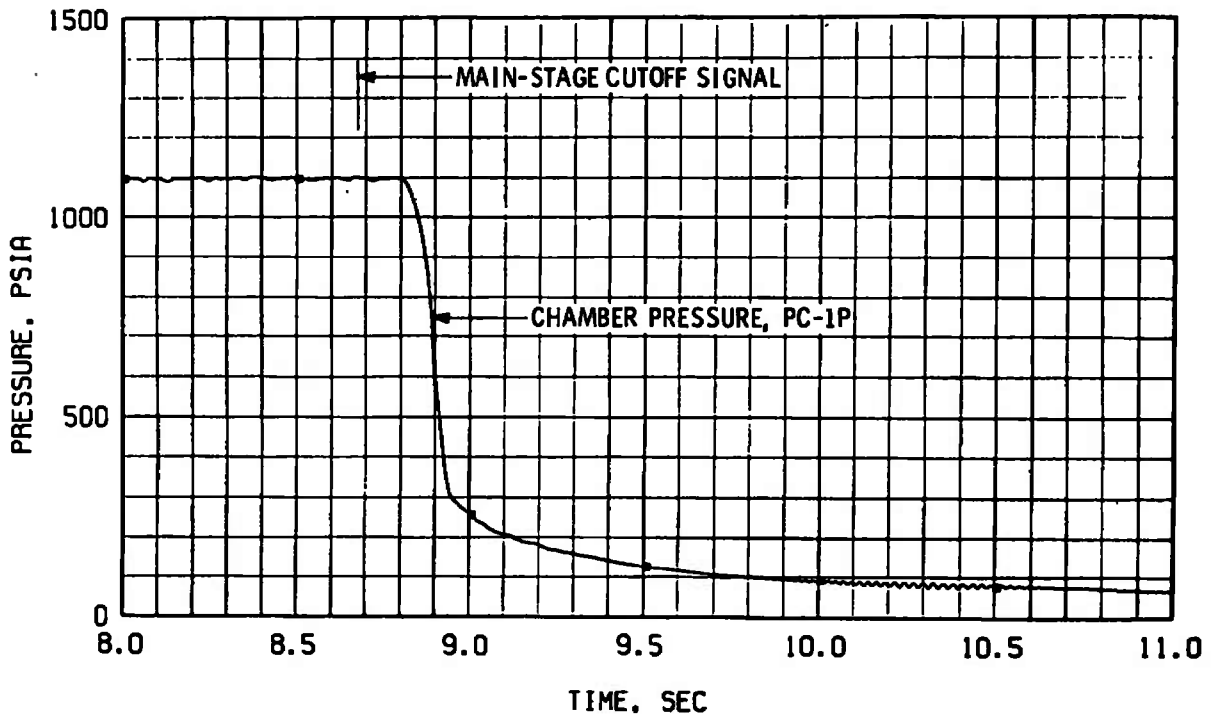

b. Transition to Post-Main-Stage Idle Mode

Fig. 10 Engine Ambient and Combustion Chamber Pressure, Firing 06A

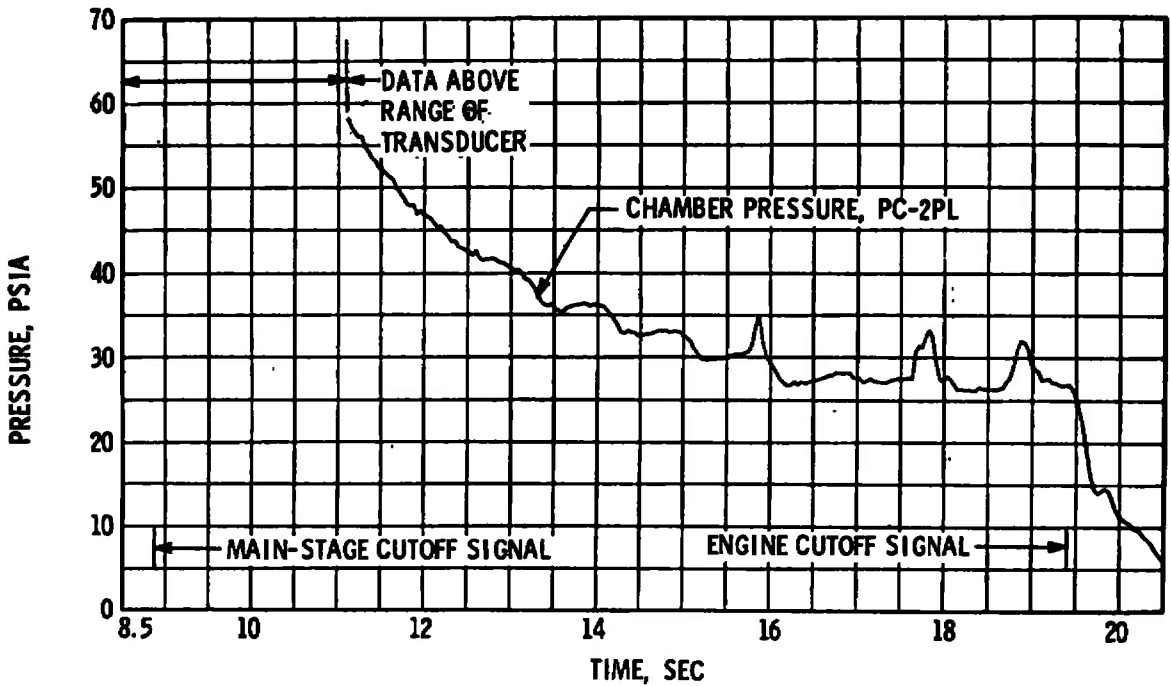

c. Post-Main-Stage Idle Mode  
Fig. 10 Concluded

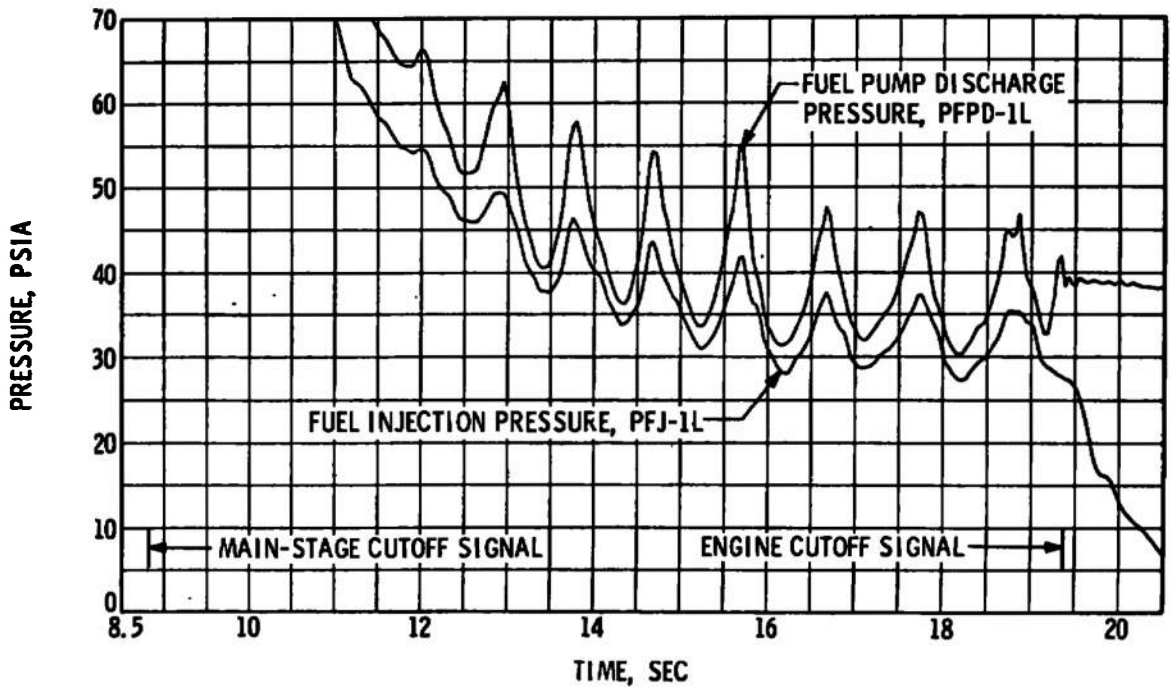


Fig. 11 Fuel Feed System Pressures during Post-Main-Stage Idle Mode, Firing 06A

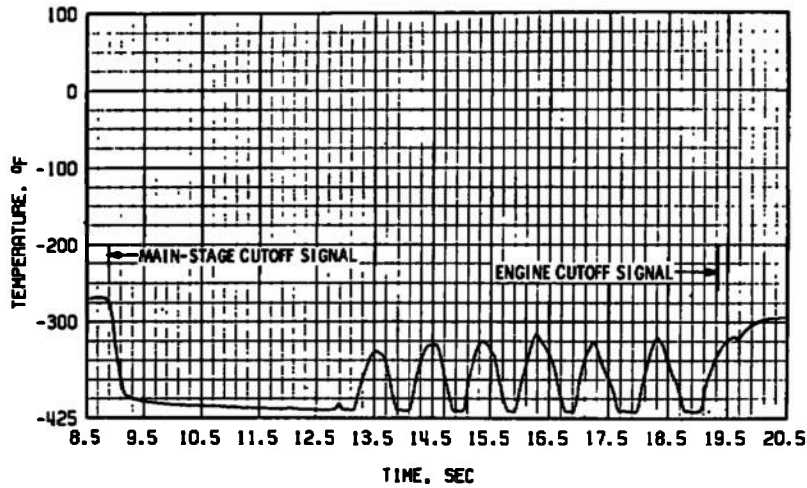


Fig. 12 Fuel Injection Temperature during Post-Main-Stage Idle Mode, Firing 06A

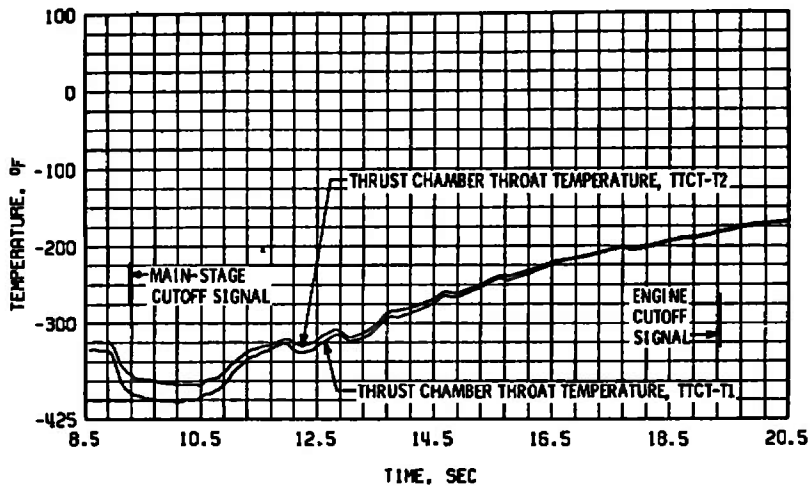


Fig. 13 Thrust Chamber Throat External Skin Temperatures, Firing 06A



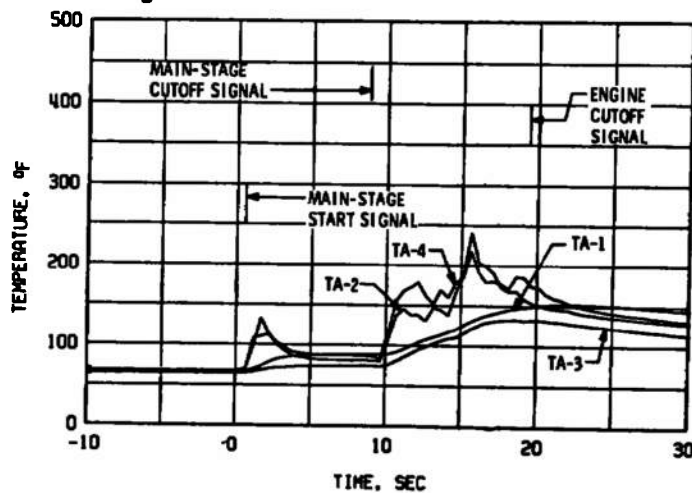


Fig. 14 Engine Ambient Temperature, Firing 06A

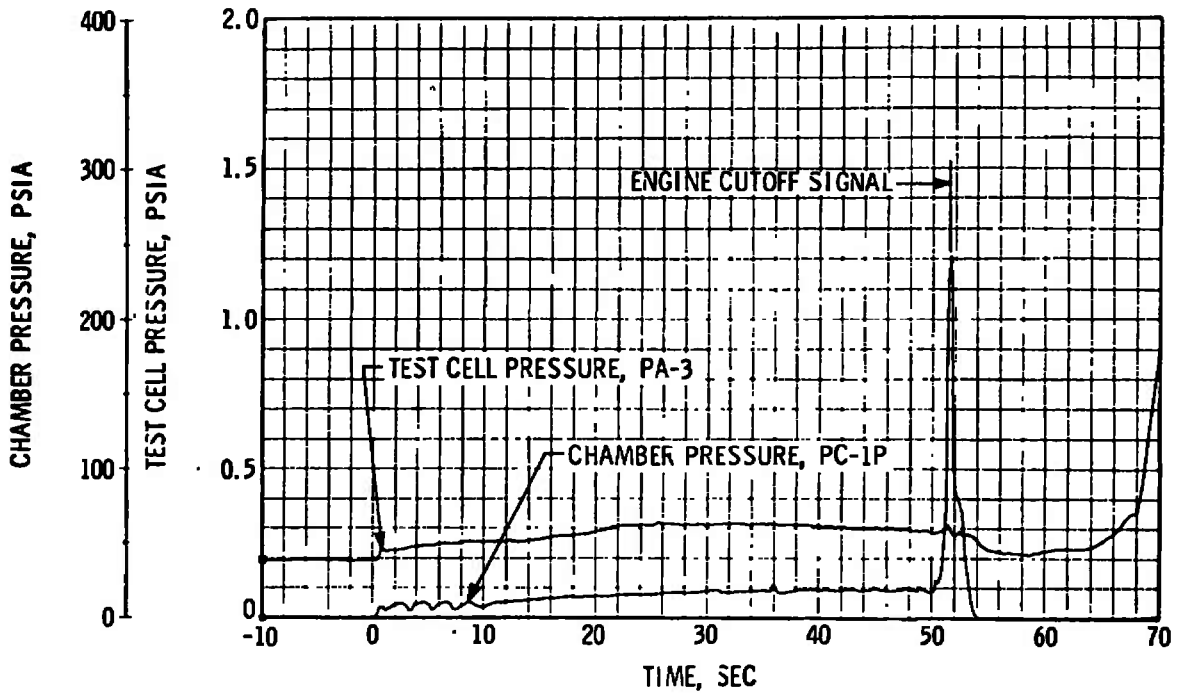

a. Total Duration of Firing

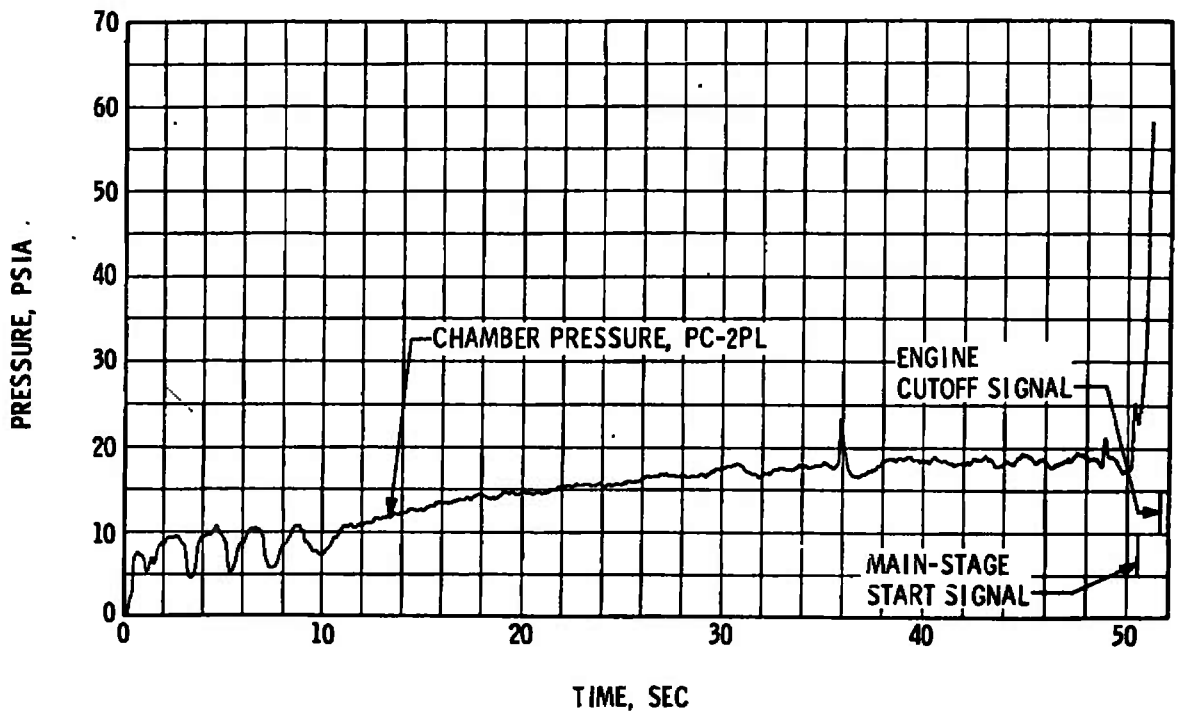

b. Pre-Main-Stage Idle Mode

Fig. 15 Engine Ambient and Combustion Chamber Pressure, Firing 06B



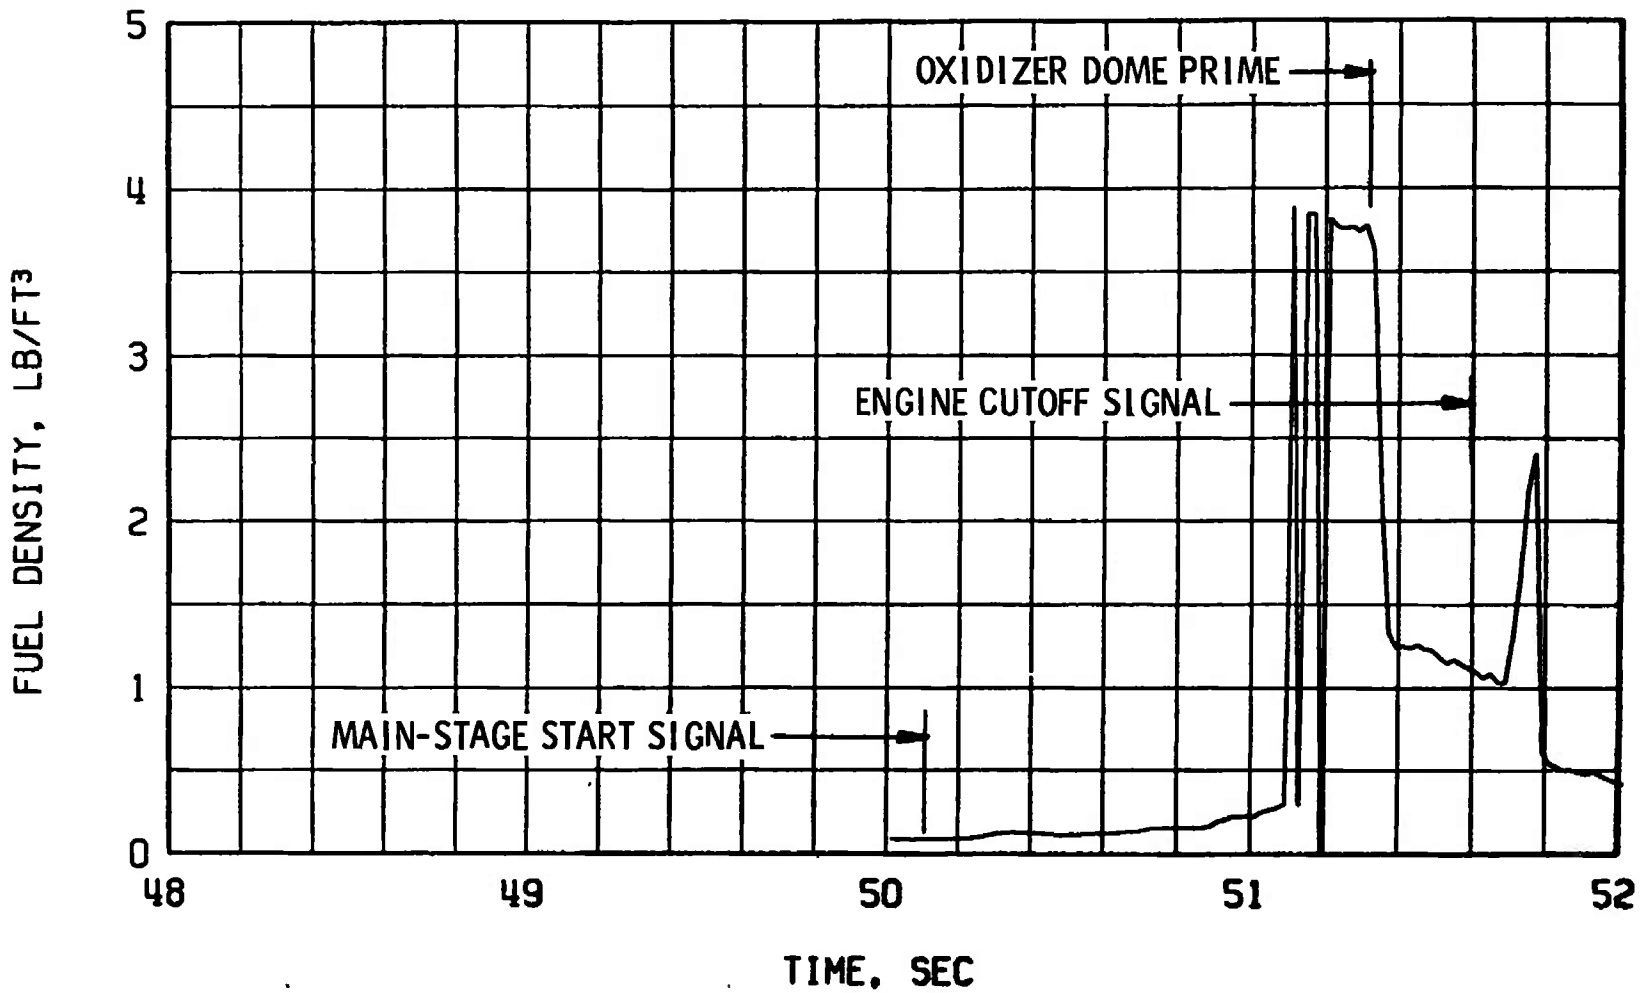



Fig. 16 Fuel Density at the Fuel Injector during Transition, Firing 06B

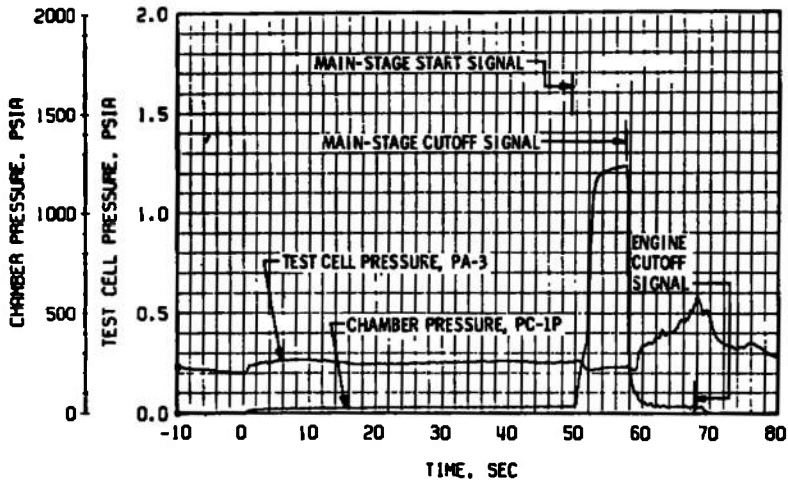

a. Total Duration of Firing

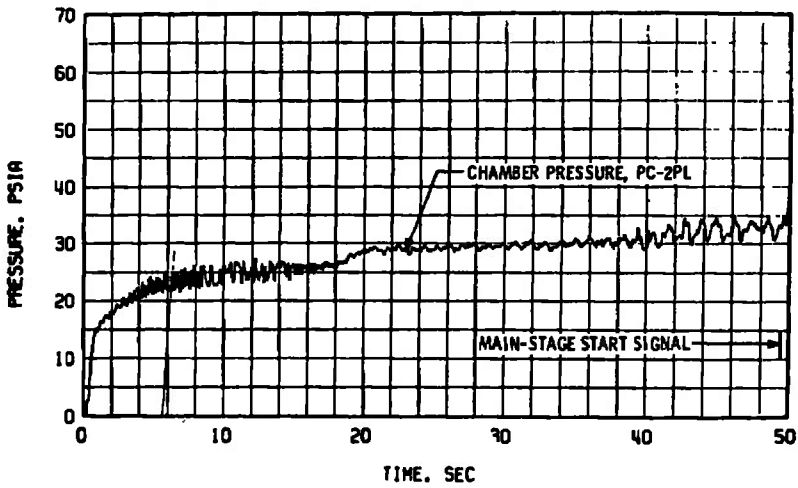


b. Pre-Main-Stage Idle Mode

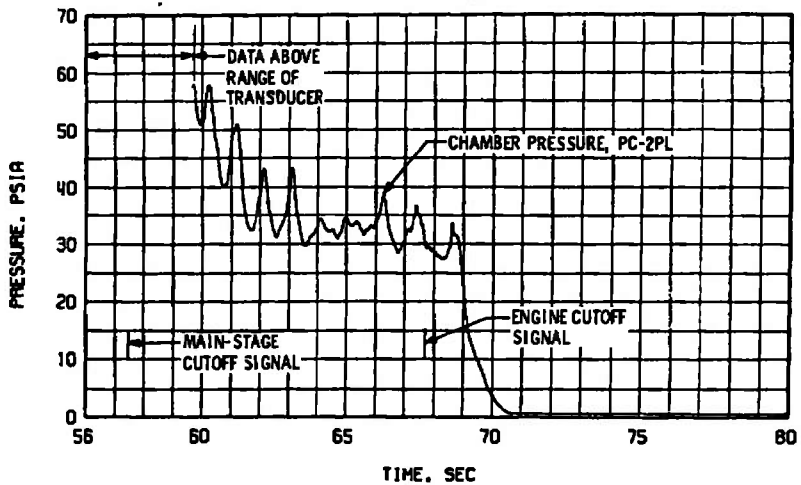


c. Post-Main-Stage Idle Mode

Fig. 17 Engine Ambient and Combustion Chamber Pressure, Firing 07A

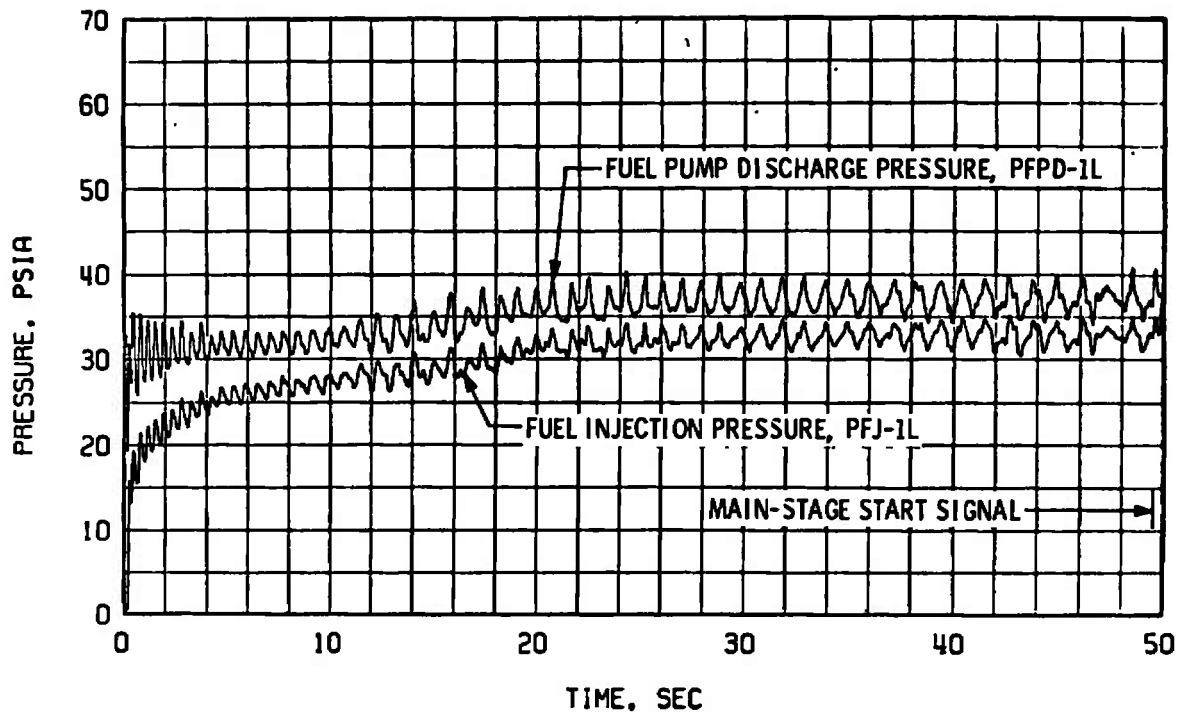

a. Pre-Main-Stage Idle Mode

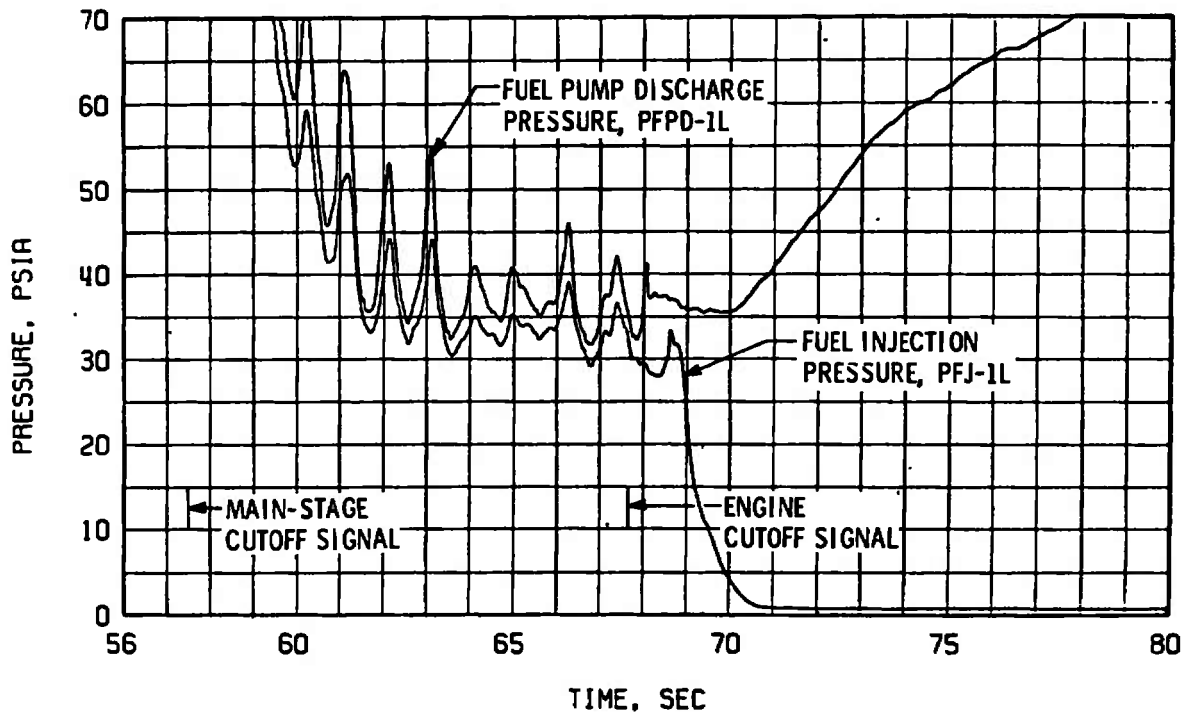

b. Post-Main-Stage Idle Mode

Fig. 18 Fuel Feed System Pressures, Firing 07A



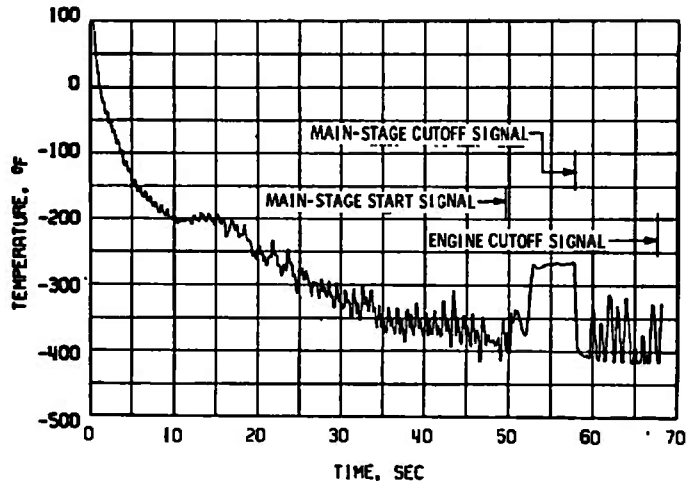


Fig. 19 Fuel Injection Temperature, Firing 07A

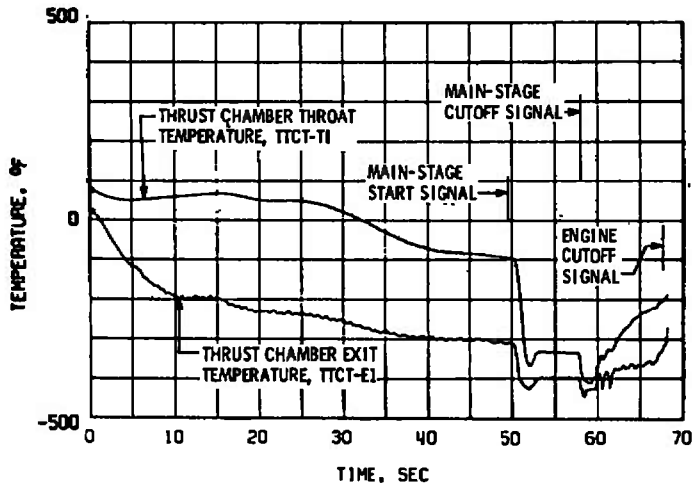


Fig. 20 Thrust Chamber External Skin Temperatures, Firing 07A



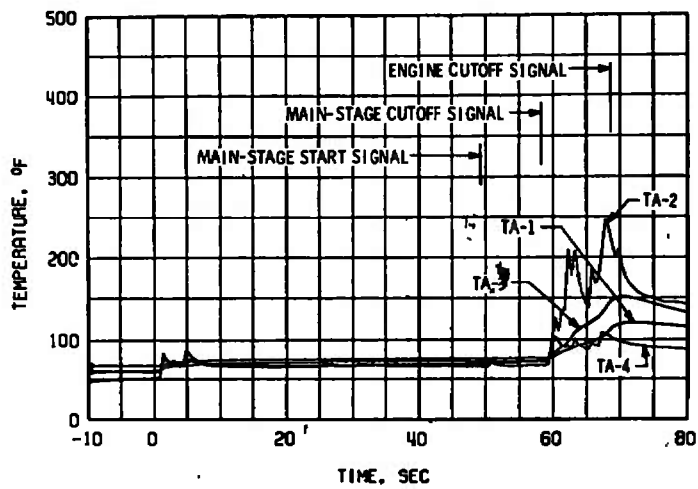



Fig. 21 Engine Ambient Temperature, Firing 07A

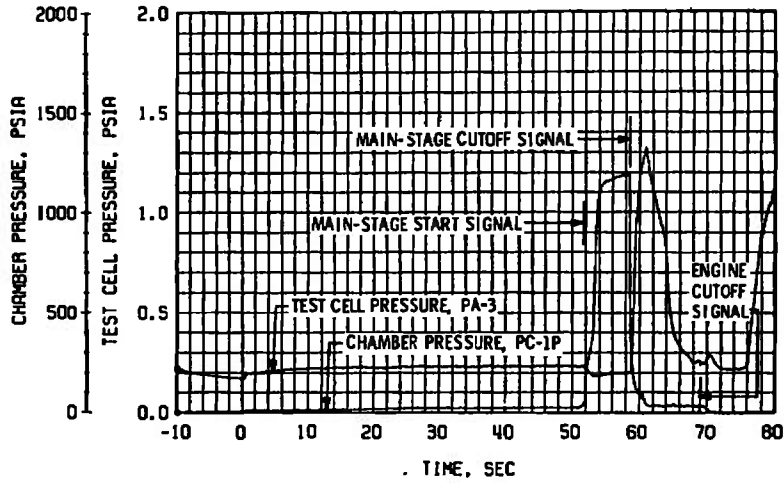

a. Total Duration of Firing

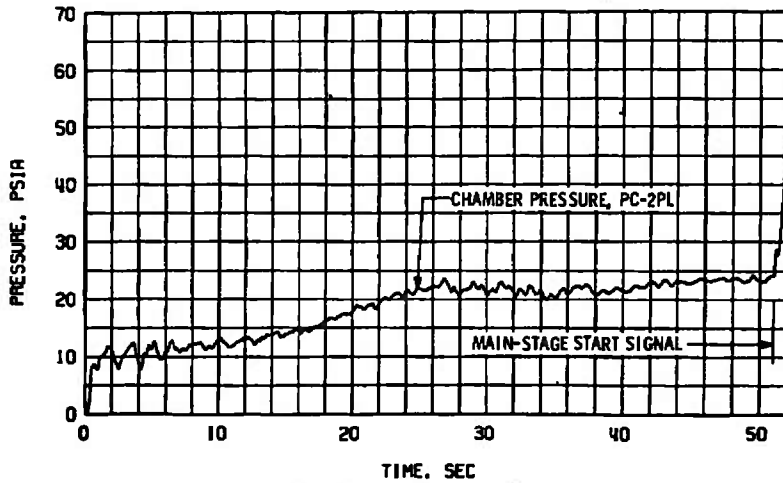


b. Pre-Main-Stage Idle Mode

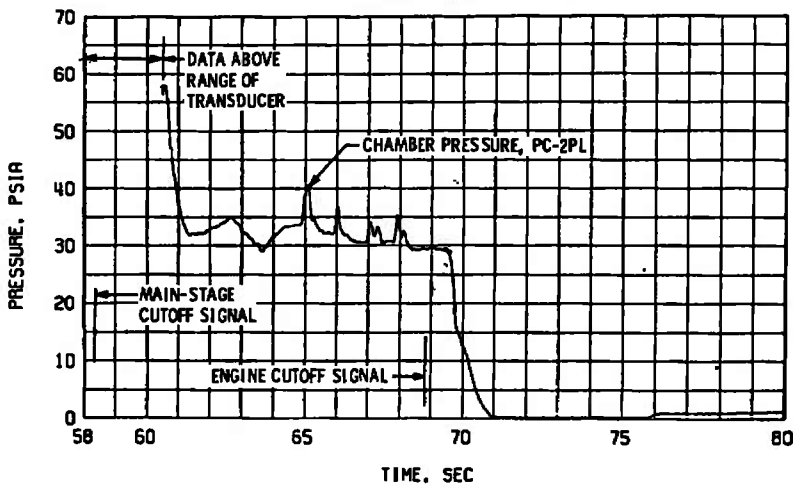


c. Post-Main-Stage Idle Mode

Fig. 22 Engine Ambient and Combustion Chamber Pressure, Firing 07B

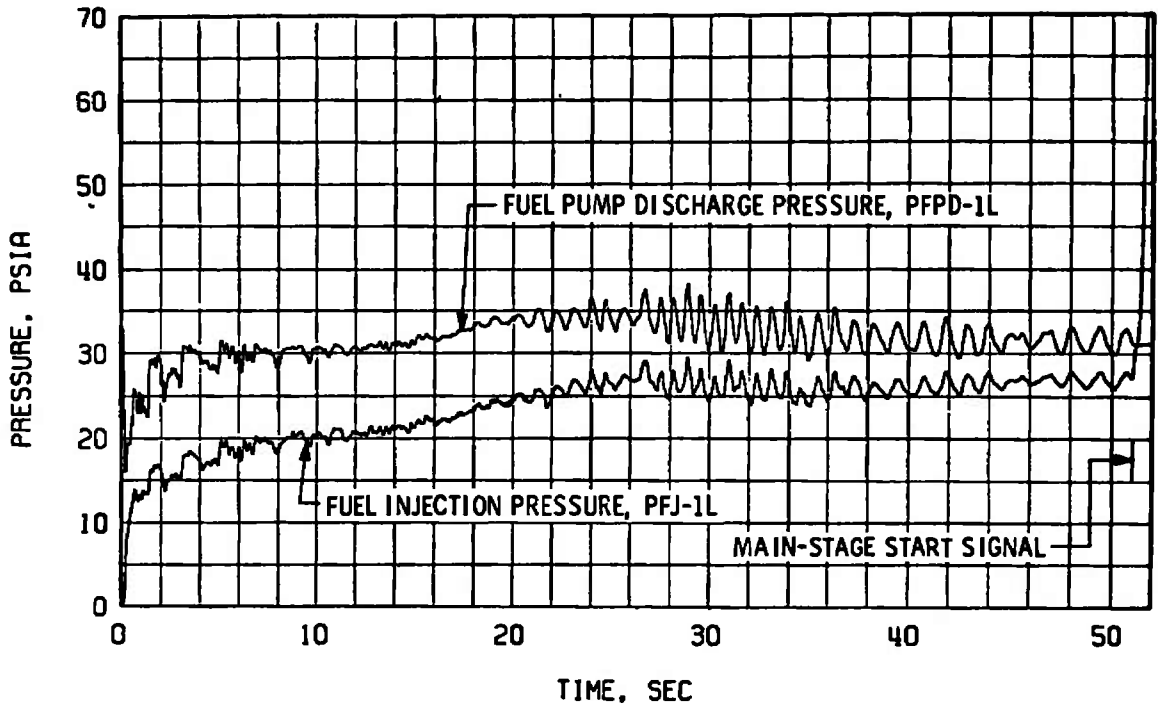

a. Pre-Main-Stage Idle Mode

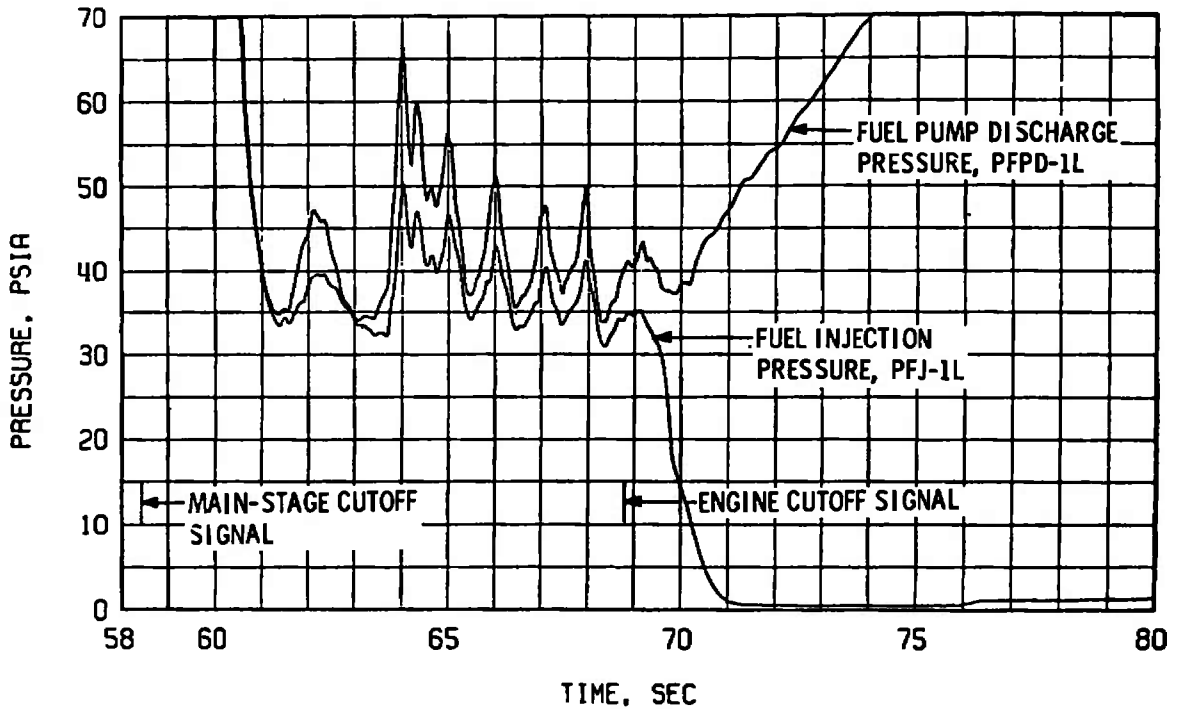

b. Post-Main-Stage Idle Mode

Fig. 23 Fuel Feed System Pressures, Firing 07B

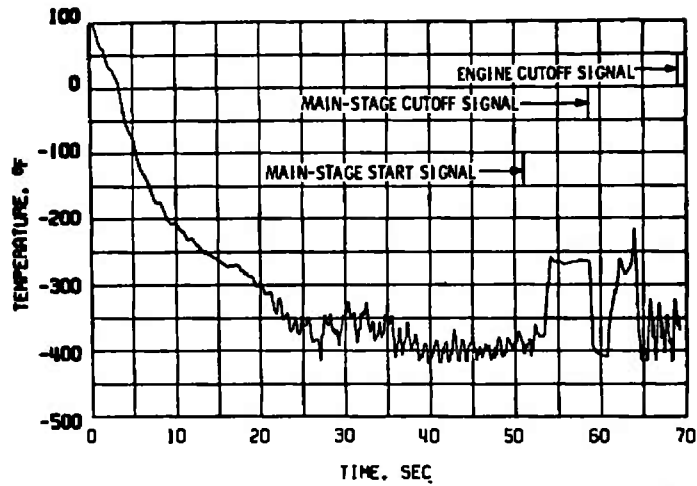


Fig. 24 Fuel Injection Temperature, Firing 07B

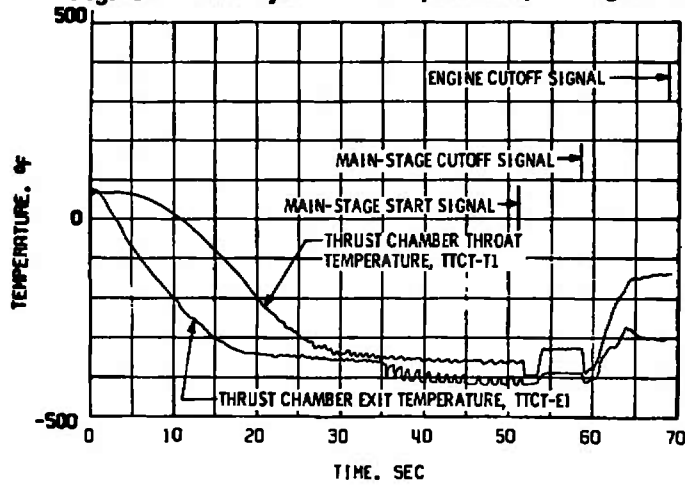


Fig. 25 Thrust Chamber External Skin Temperatures, Firing 07B



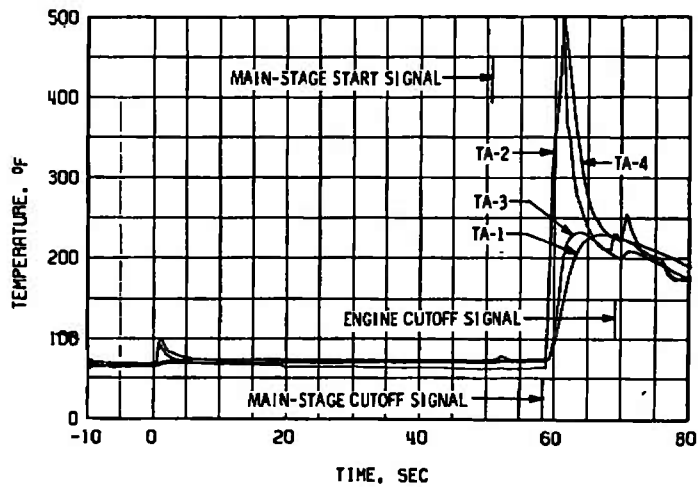


Fig. 26 Engine Ambient Temperature, Firing 07B

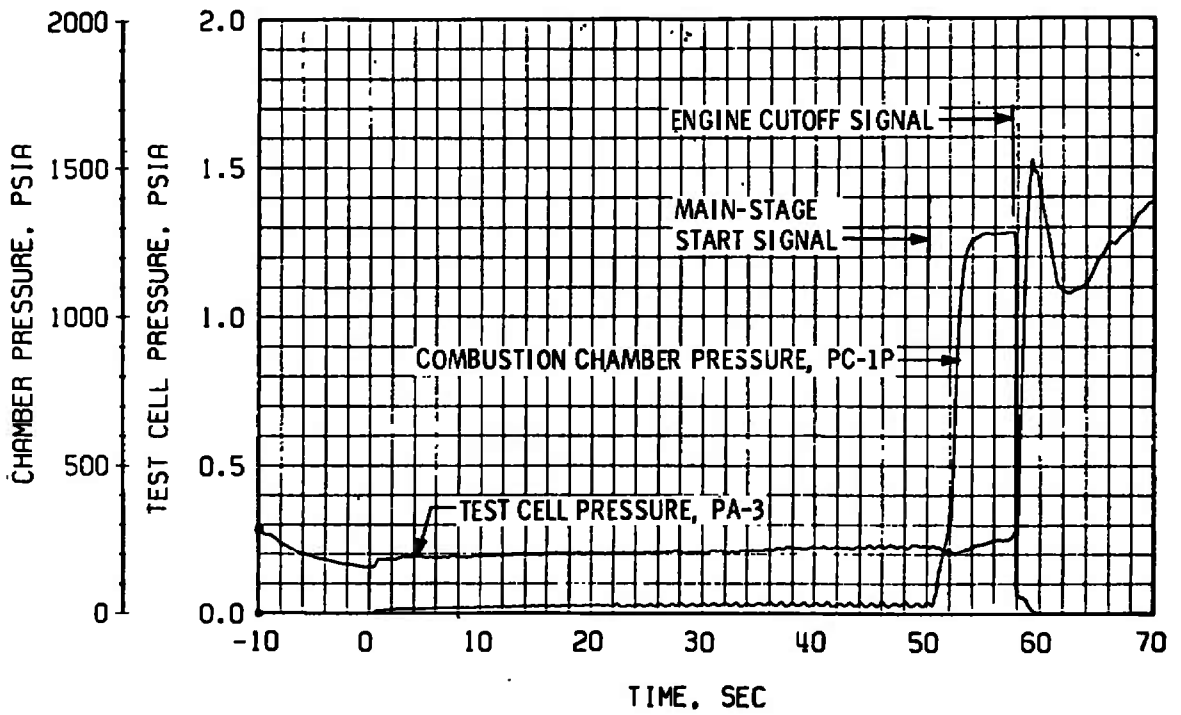

a. Total Duration of Firing

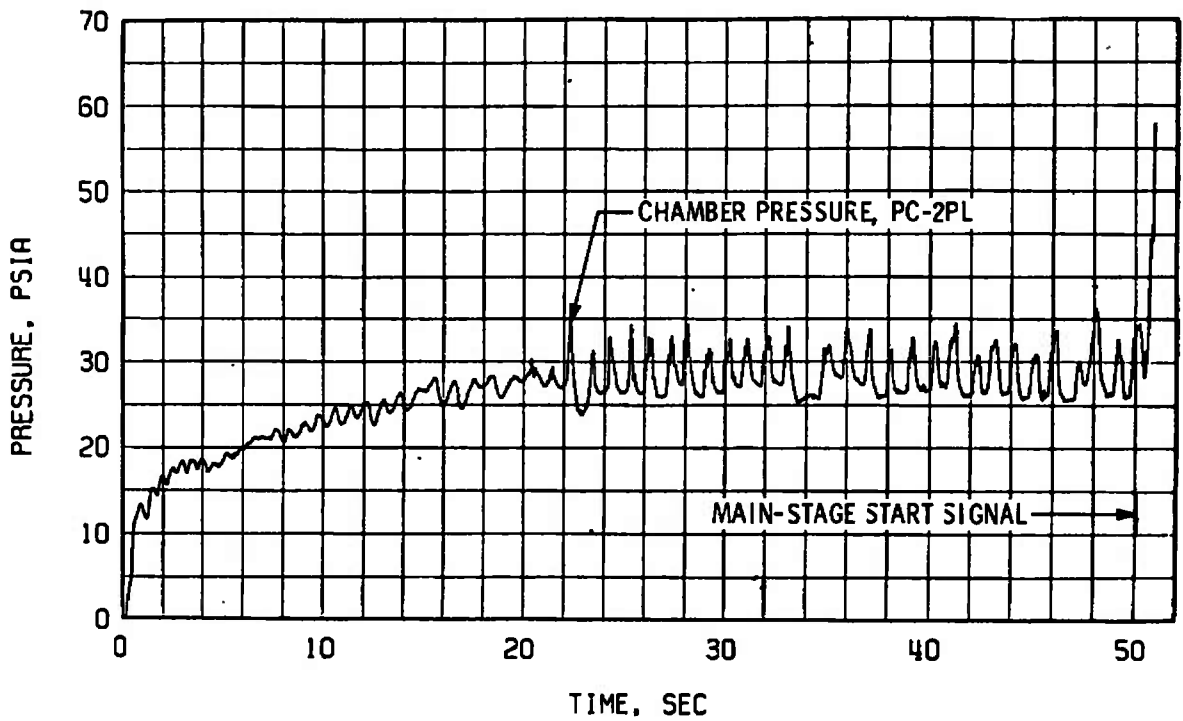

b. Pre-Main-Stage Idle Mode

Fig. 27 Engine Ambient and Combustion Chamber Pressure, Firing 07C

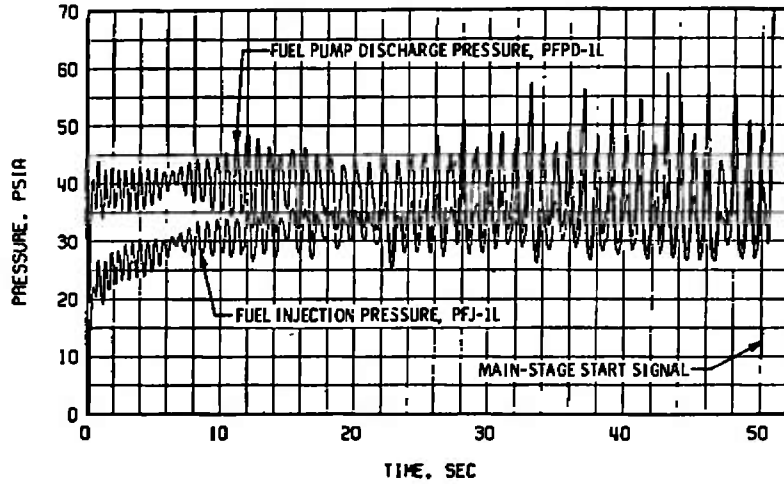


Fig. 28 Fuel Feed System Pressures, Firing 07C

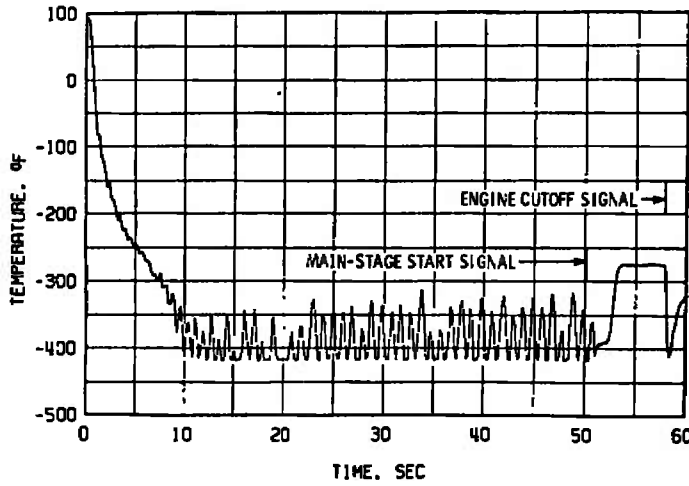


Fig. 29 Fuel Injection Temperature, Firing 07C

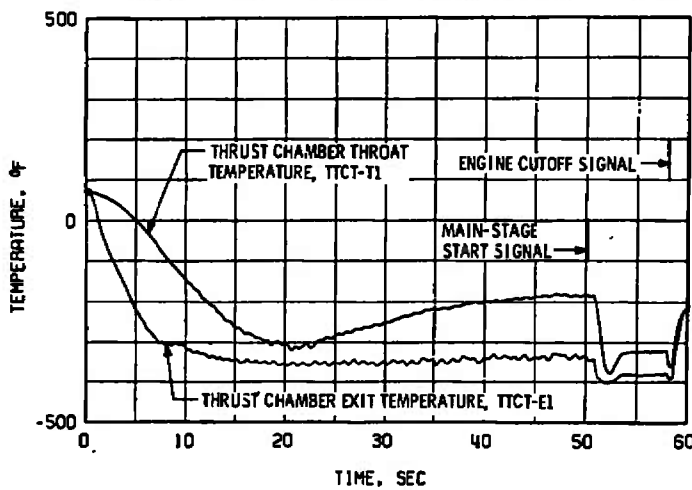


Fig. 30 Thrust Chamber External Skin Temperatures, Firing 07C

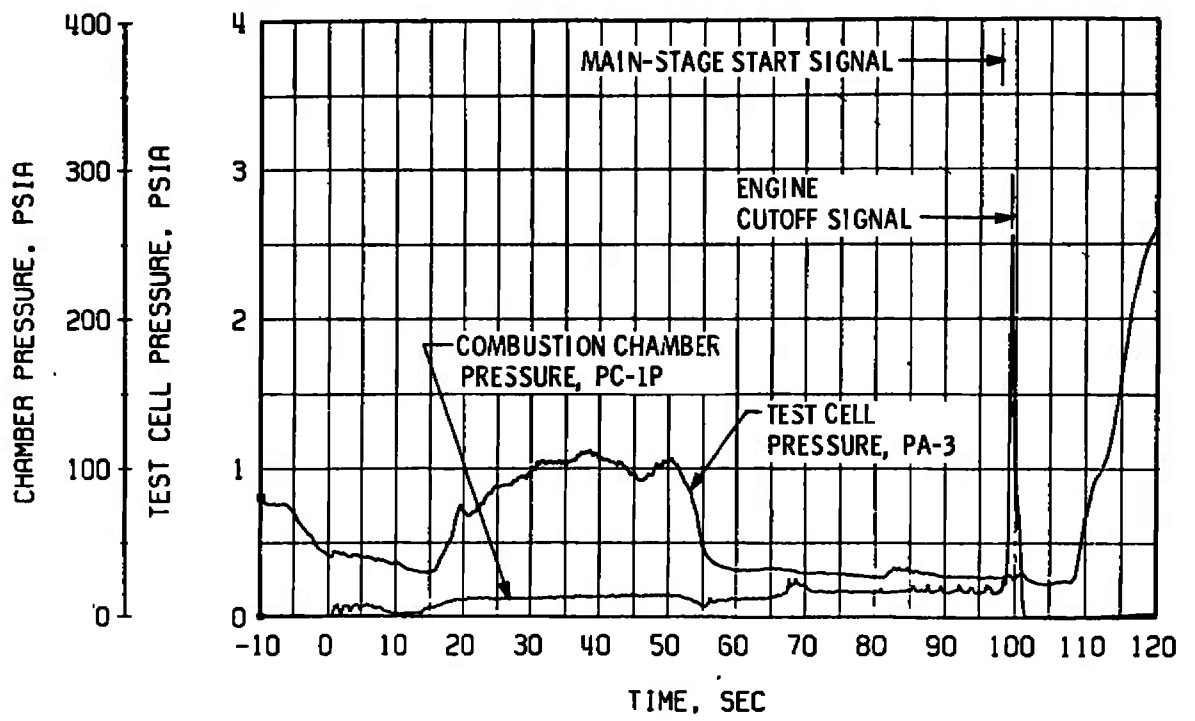


Fig. 31 Engine Ambient and Combustion Chamber Pressure, Firing 11A

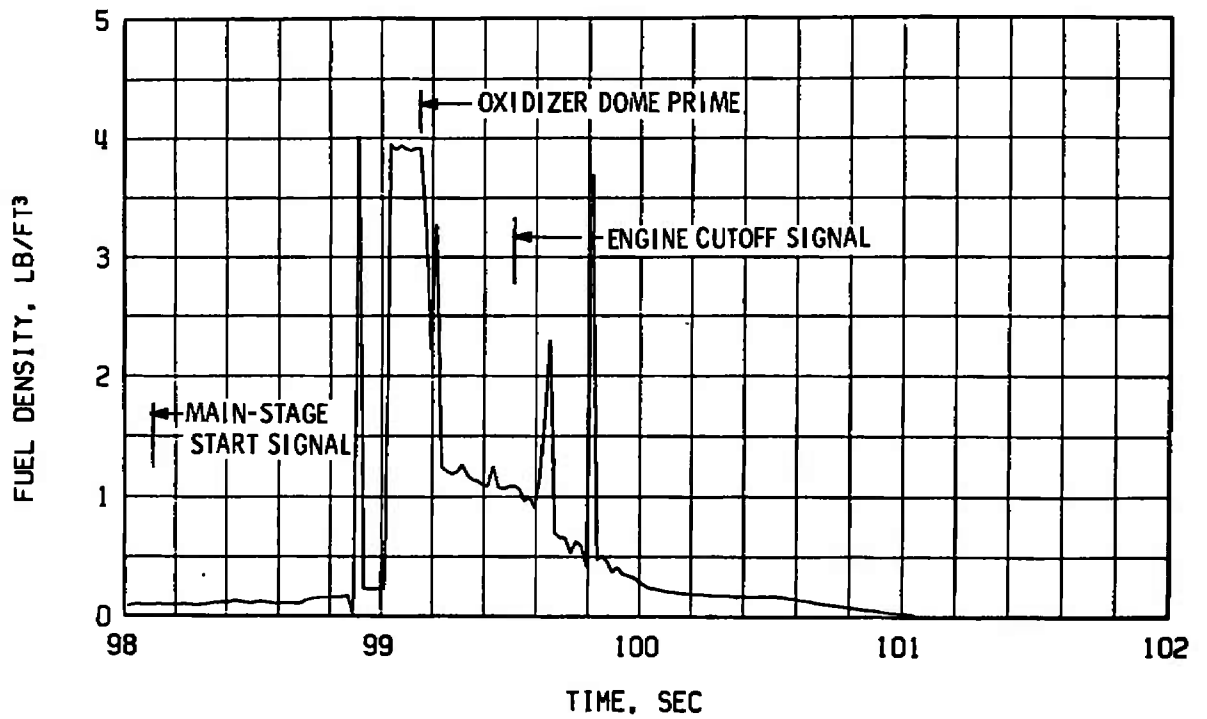


Fig. 32 Fuel Density at the Fuel Injector, Firing 11A

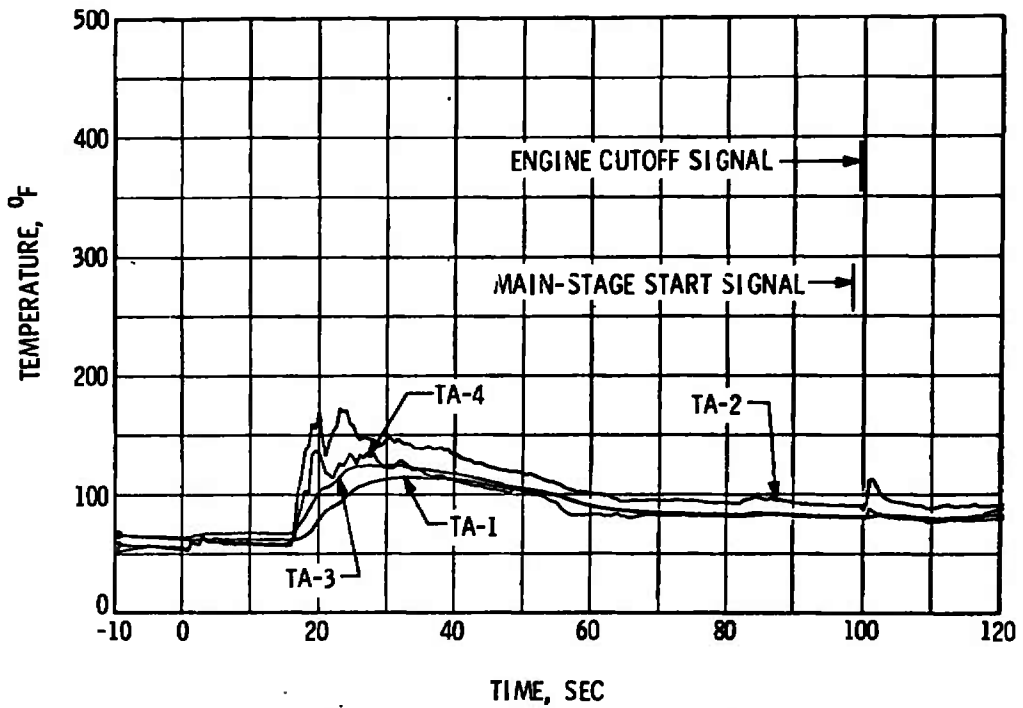


Fig. 33 Engine Ambient Temperature, Firing 11A



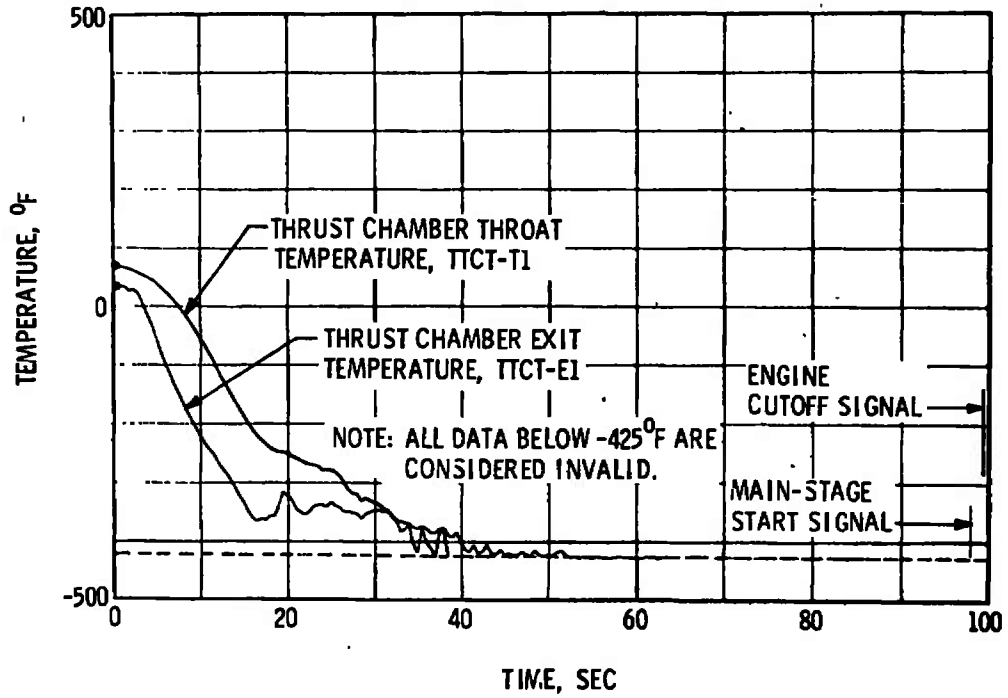


Fig. 34 Thrust Chamber External Skin Temperature, Firing 11A



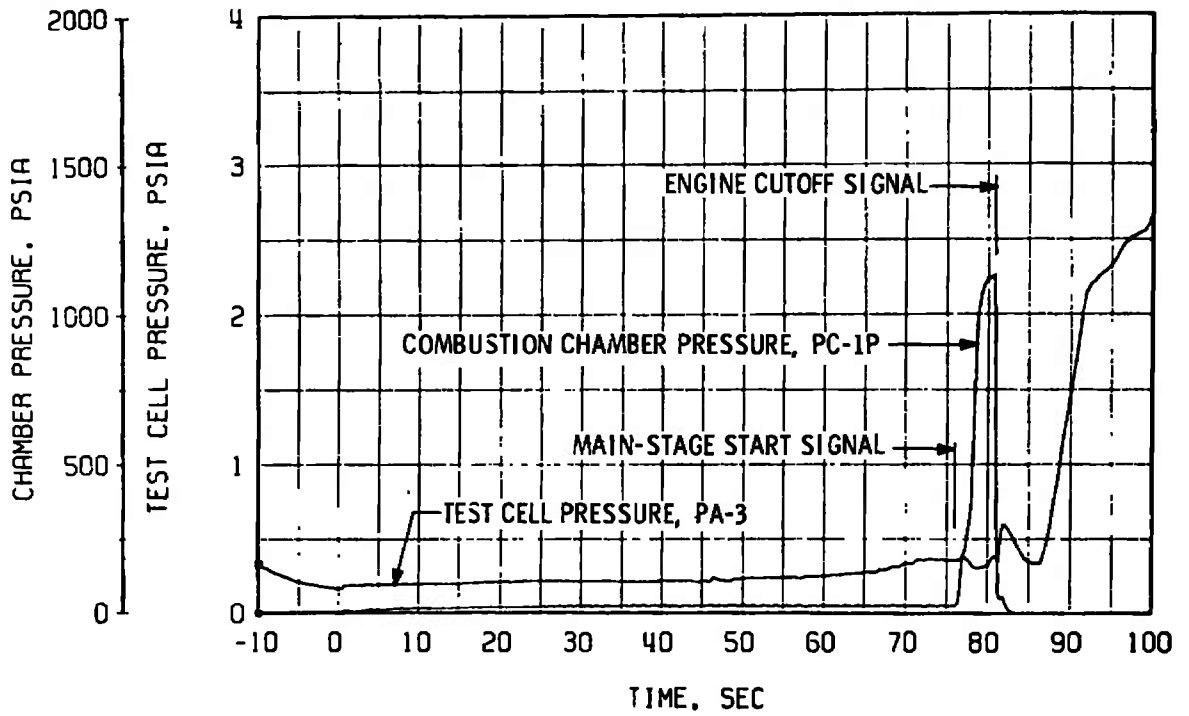

a. Total Duration of Firing

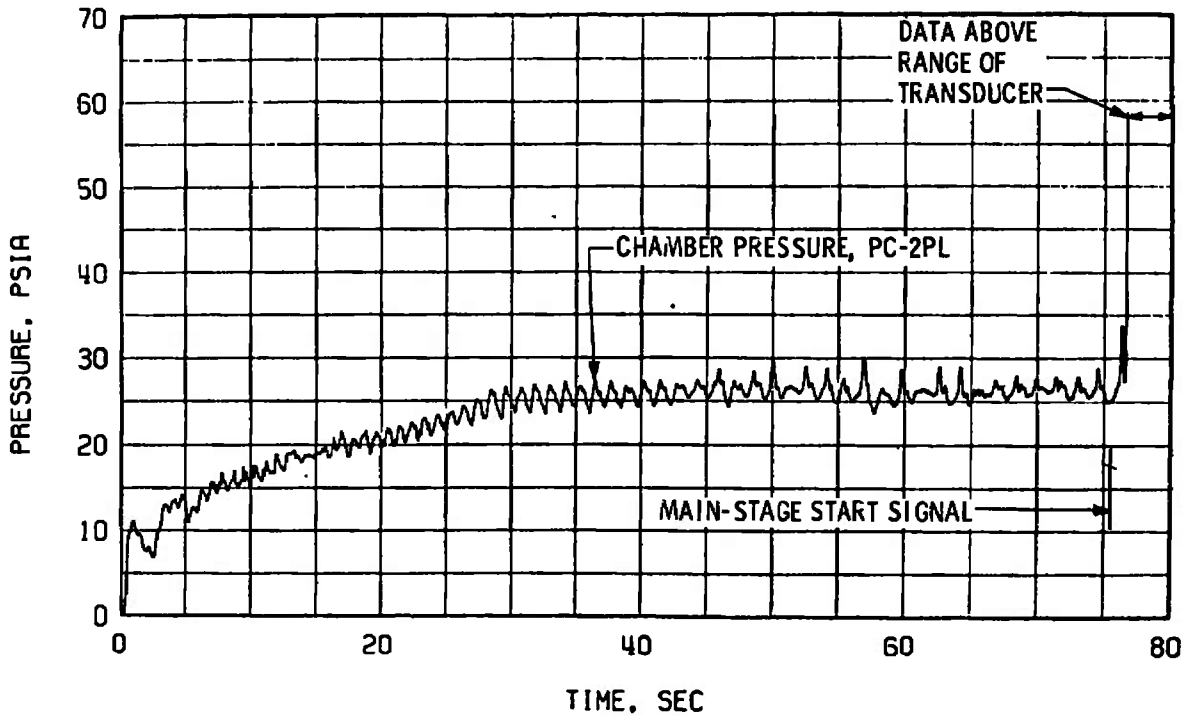

b. Pre-Main-Stage Idle Mode

Fig. 35 Engine Ambient and Combustion Chamber Pressure, Firing 11B



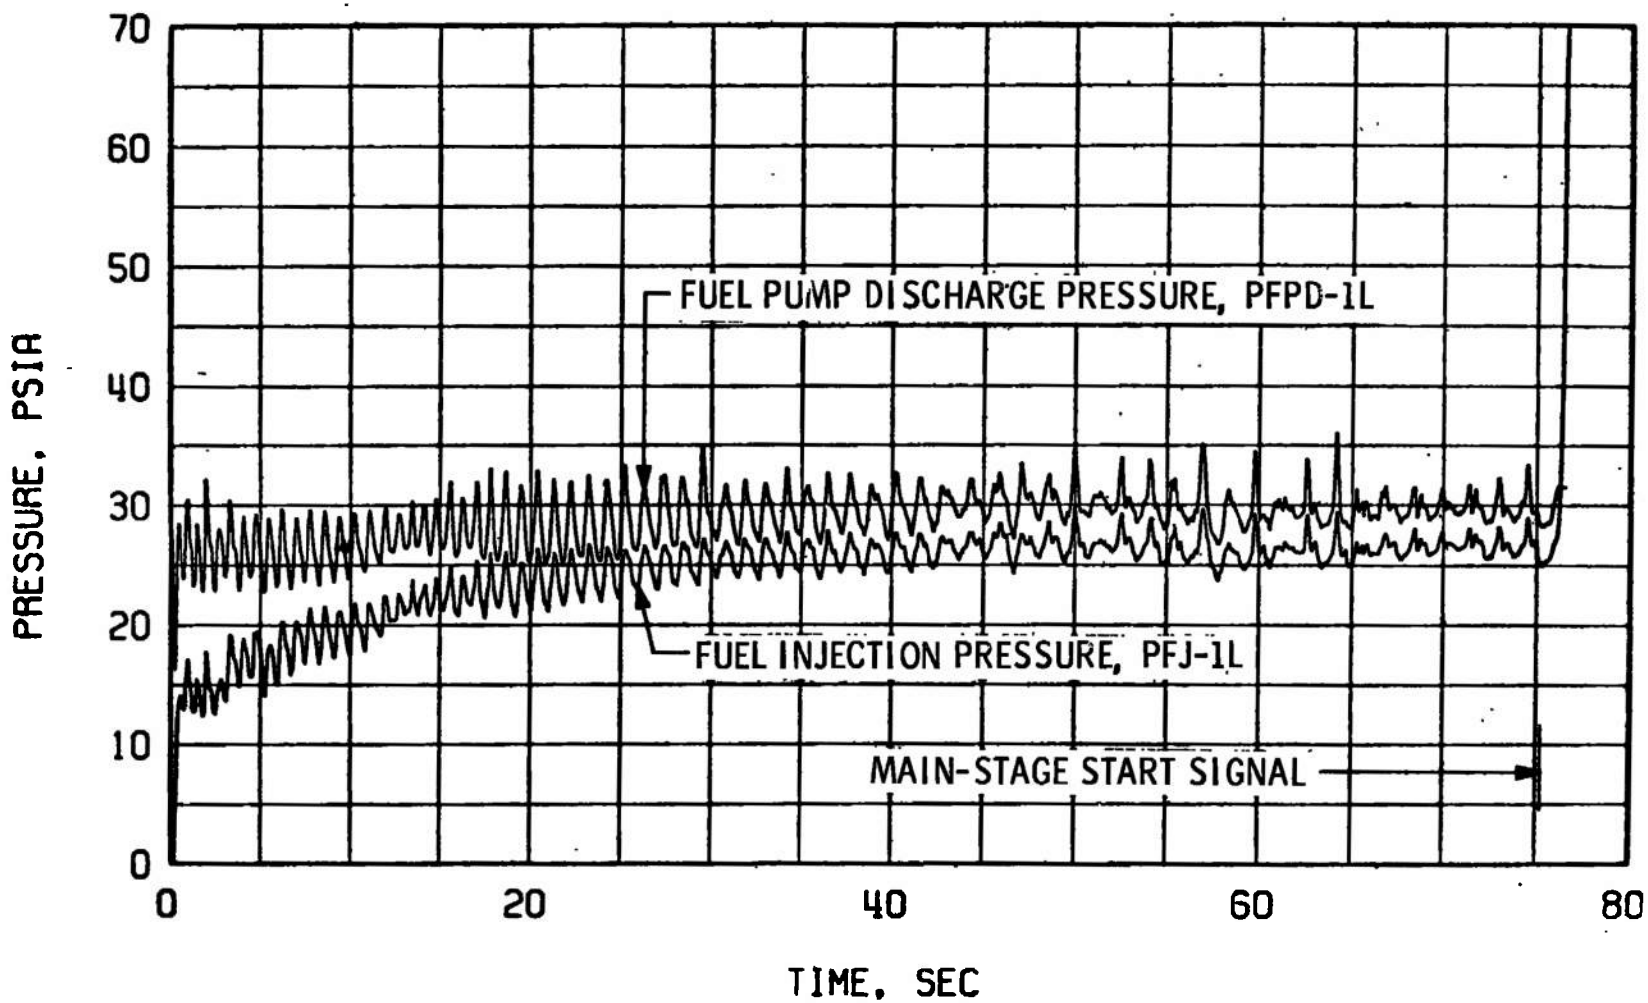


Fig. 36 Fuel Feed System Pressures, Firing 11B

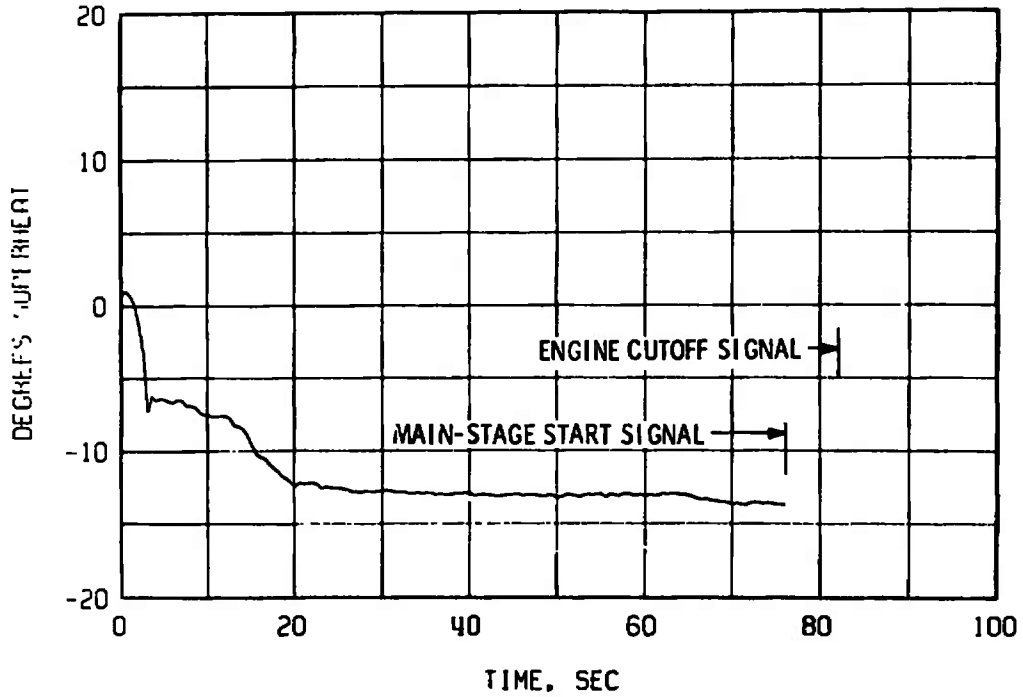


a. Oxidizer Pump Inlet

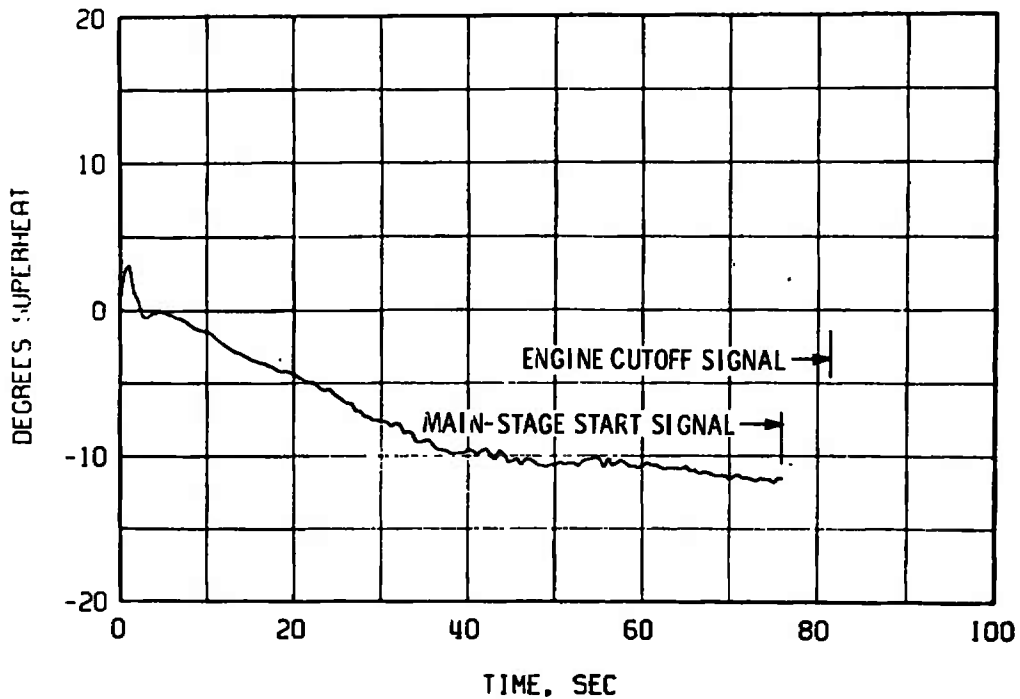


b. Oxidizer Pump Discharge


Fig. 37 Propellant Feed System Conditions during Idle Mode, Firing 11B

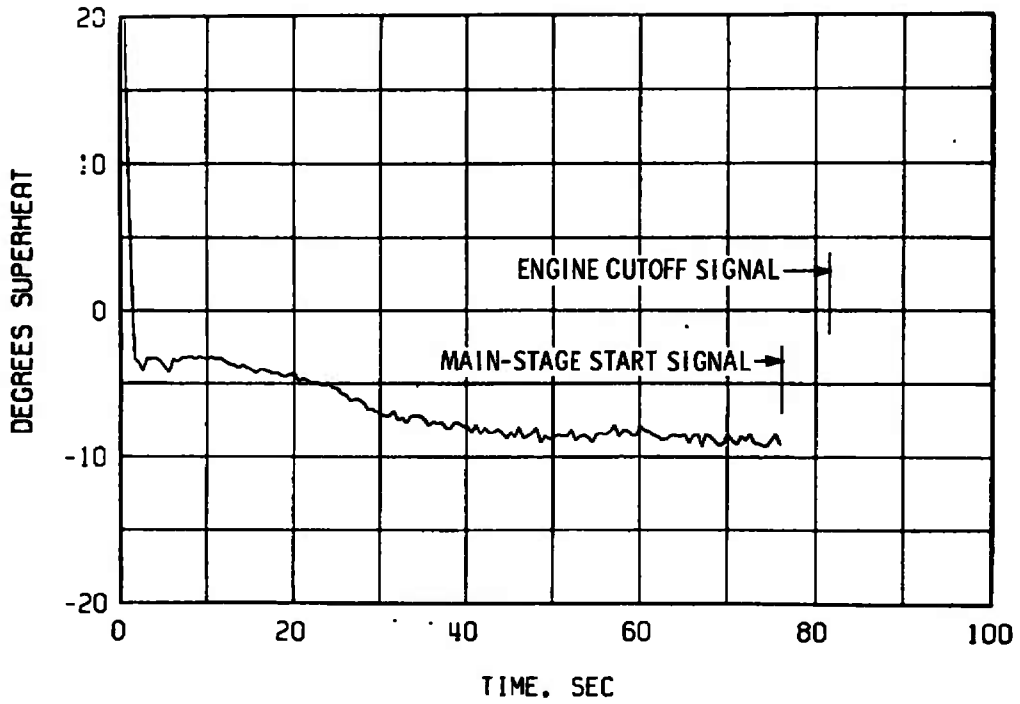


c. Oxidizer Idle-Mode Supply Line

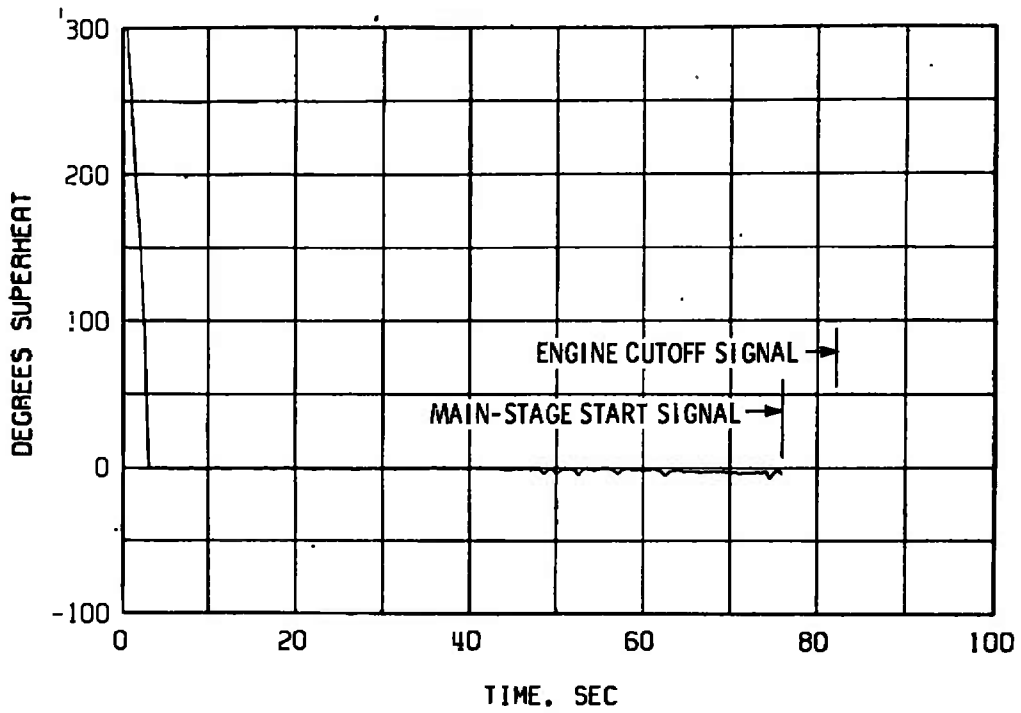


d. Oxidizer Injector  
Fig. 37 Continued

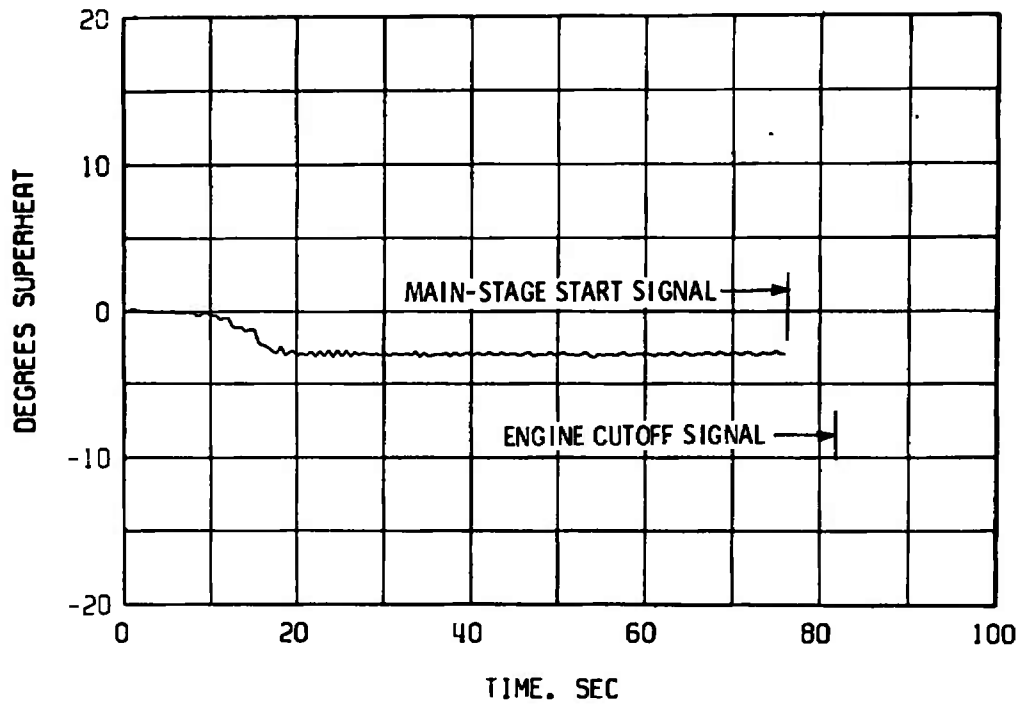

e. Fuel Pump Inlet

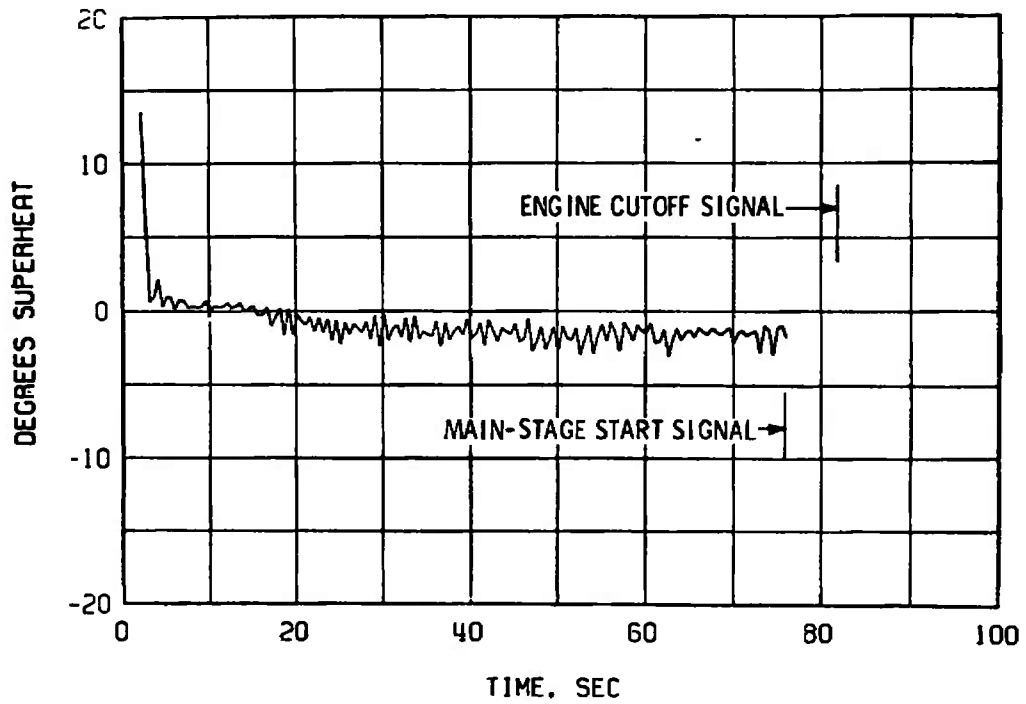

f. Fuel Pump Discharge  
Fig. 37 Continued

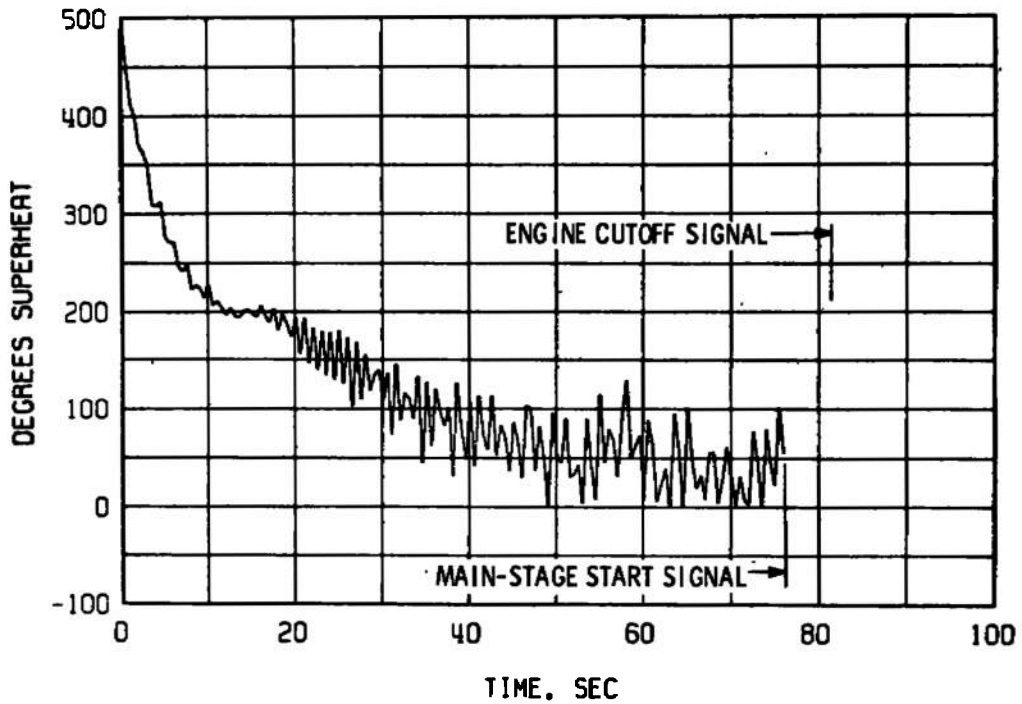

g. Fuel Injector  
Fig. 37 Concluded



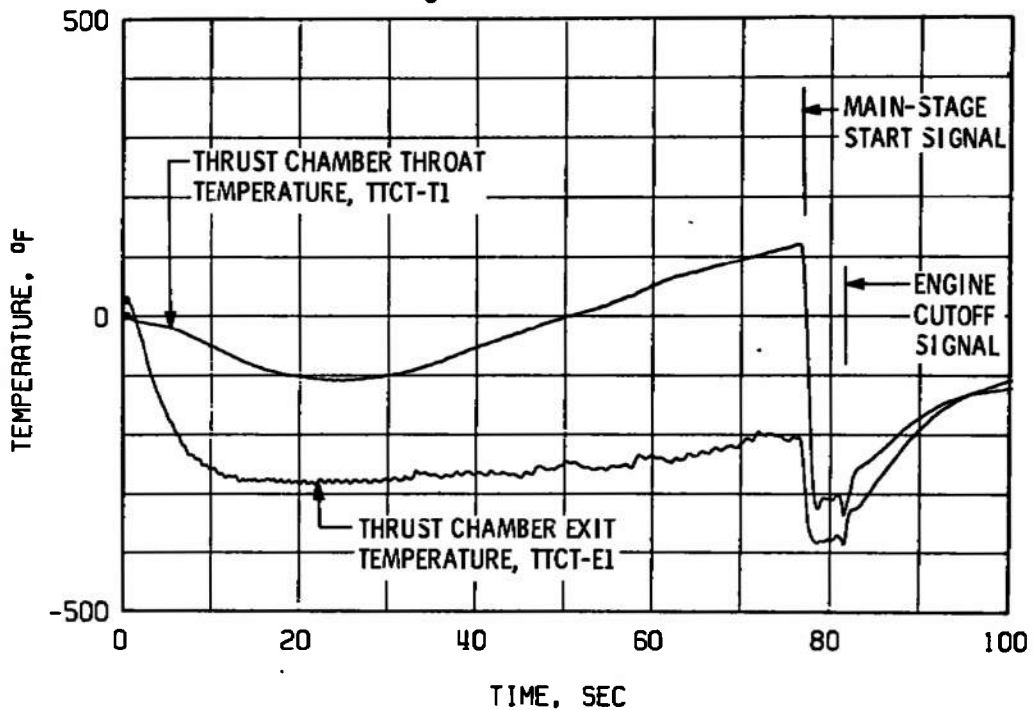


Fig. 38 Thrust Chamber External Skin Temperatures, Firing 11B

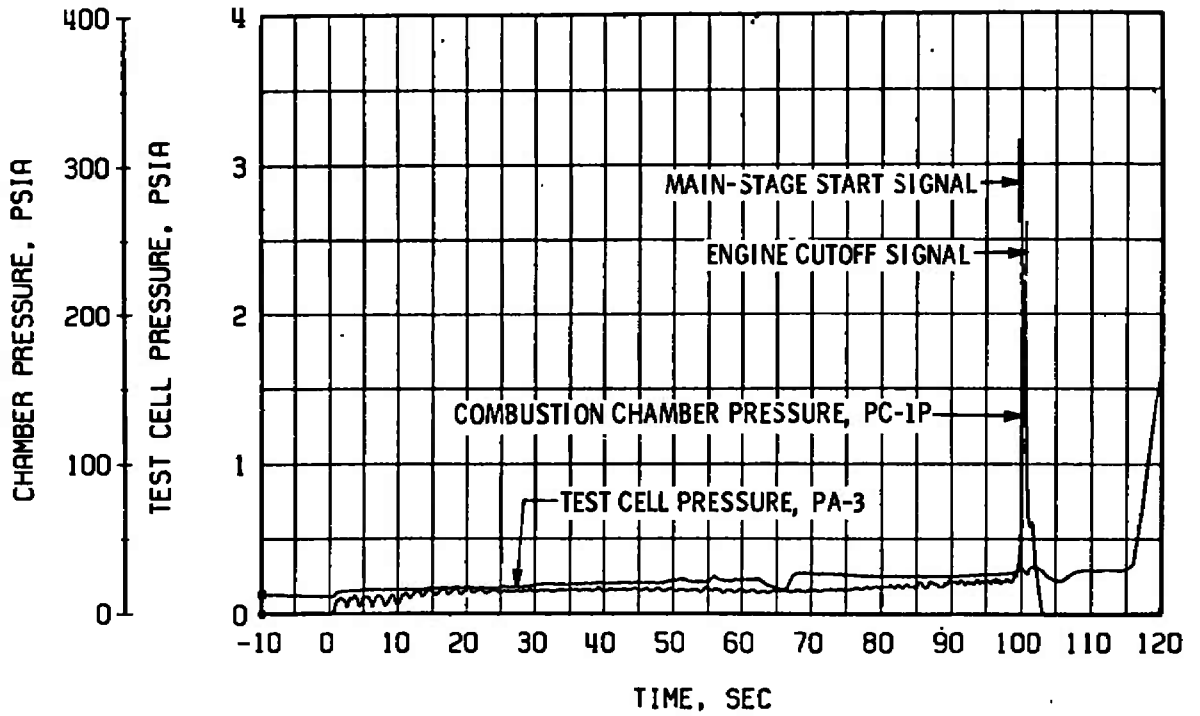

a. Total Duration of Firing

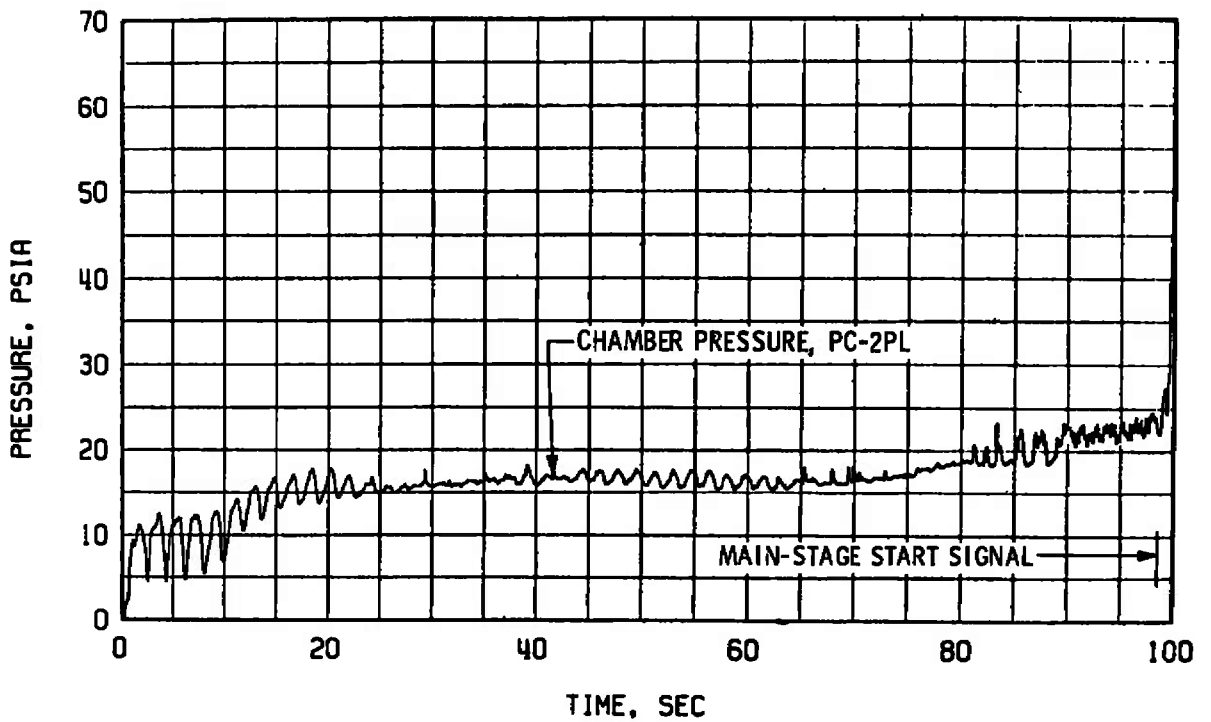

b. Pre-Main-Stage Idle Mode

Fig. 39 Engine Ambient and Combustion Chamber Pressure, Firing 11C



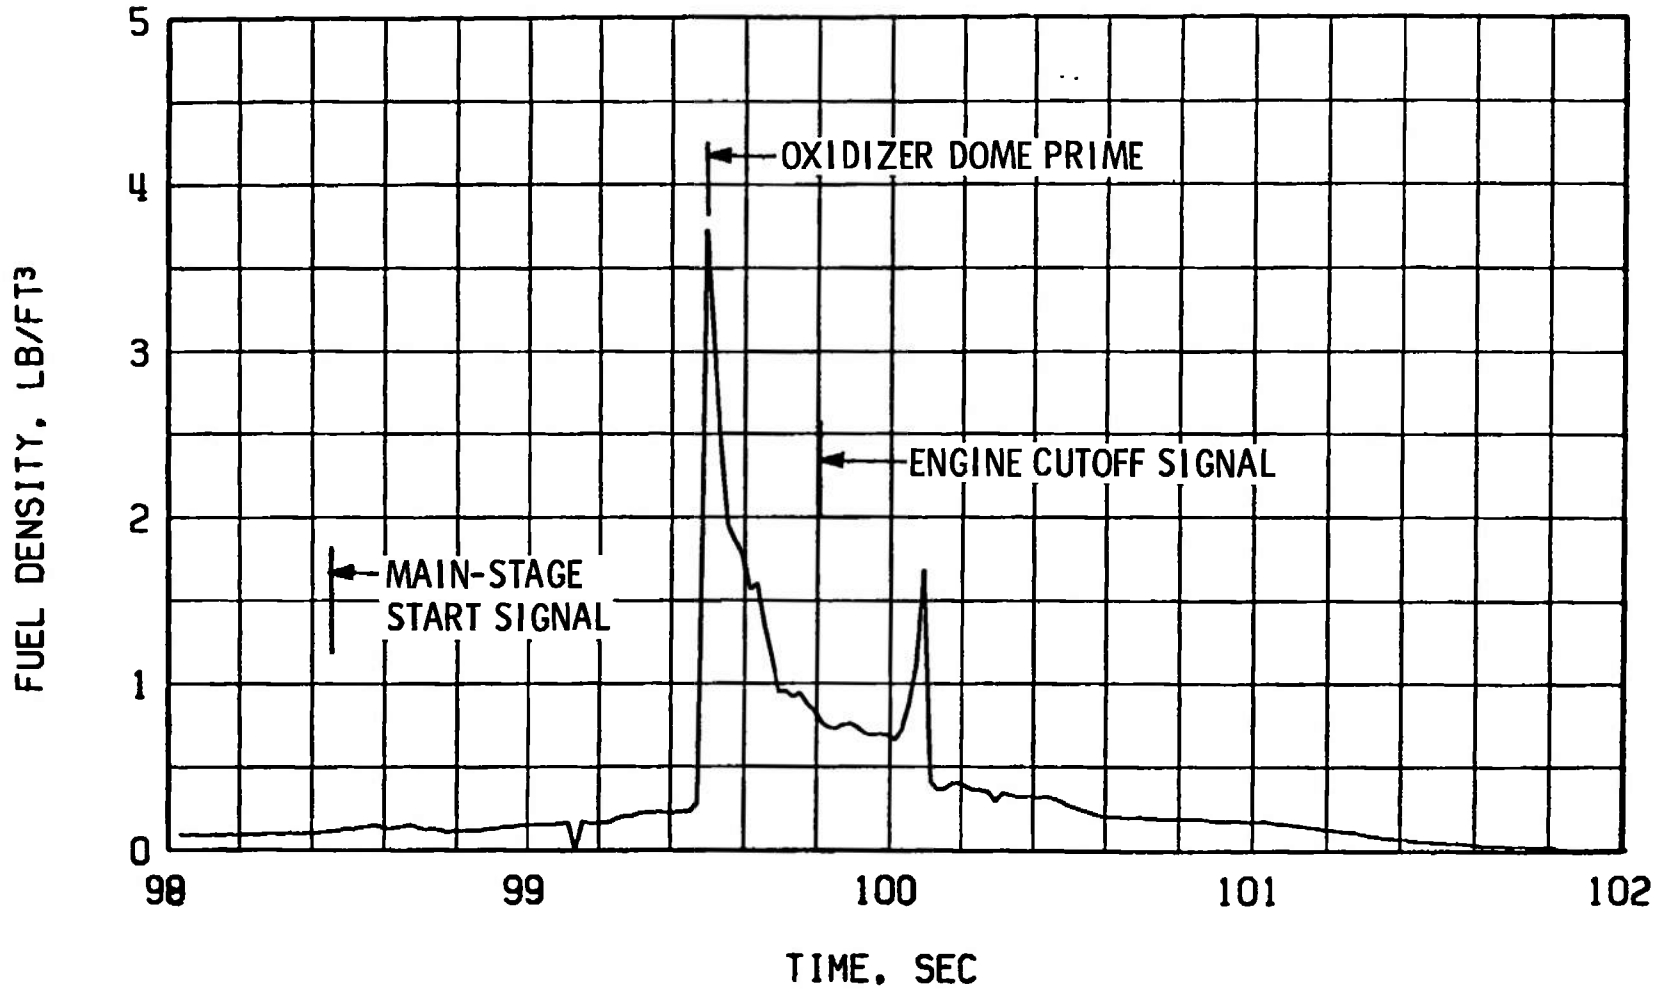


Fig. 40 Fuel Density at the Fuel Injector, Firing 11C



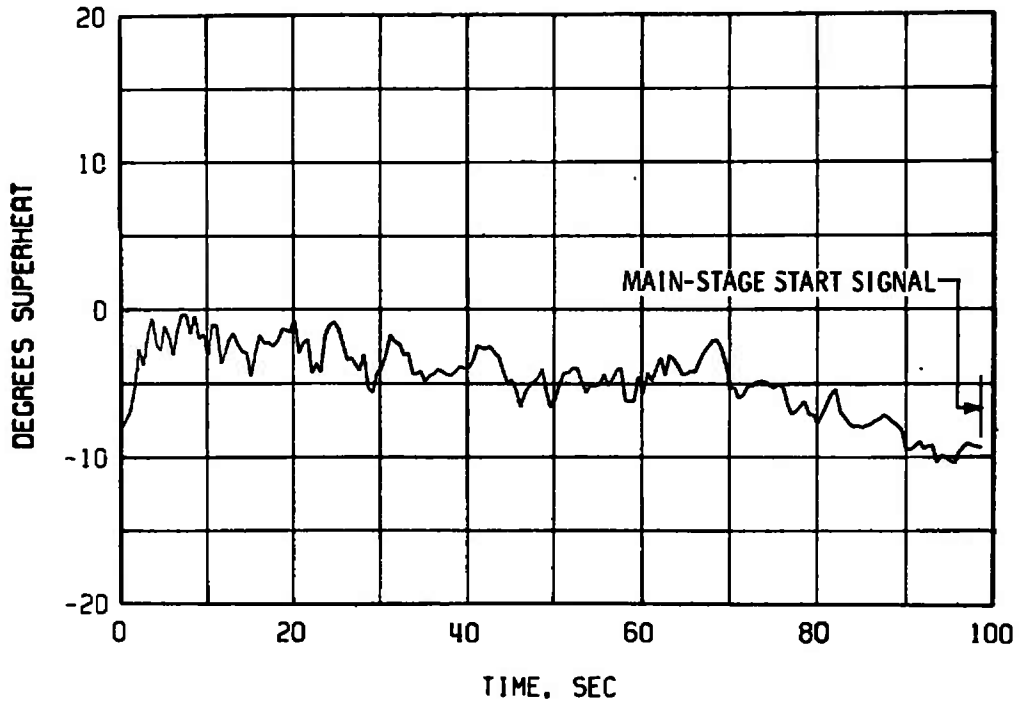


a. Oxidizer Pump Inlet

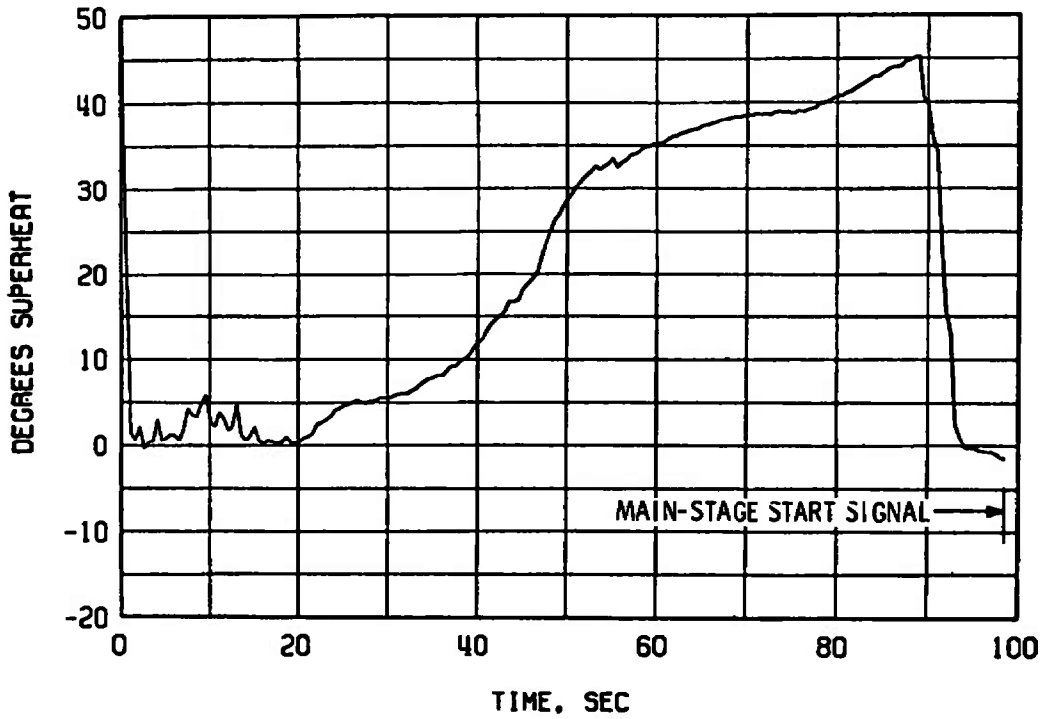


b. Oxidizer Pump Discharge


Fig. 41 Propellant Feed System Conditions during Idle Mode, Firing 11C

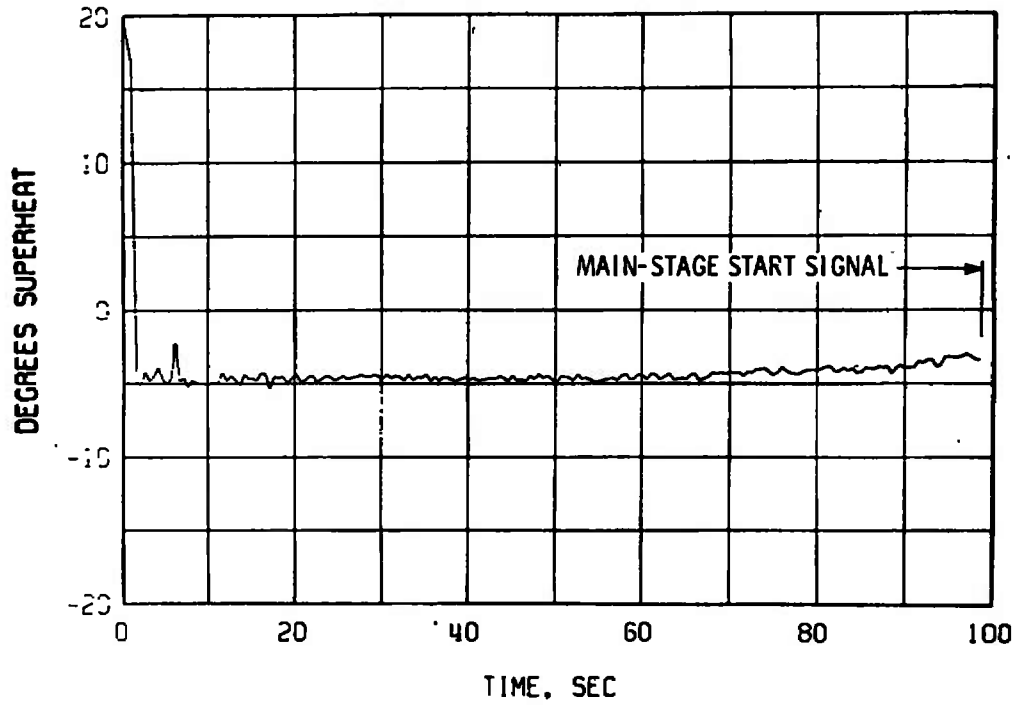


c. Oxidizer Idle-Mode Supply Line

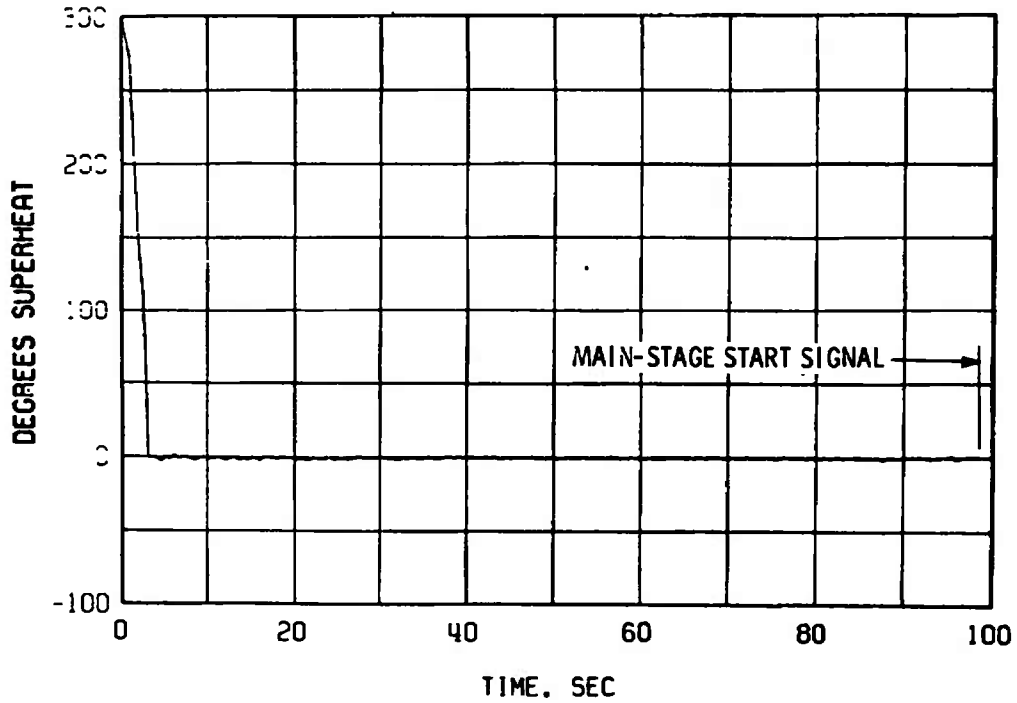


d. Oxidizer Injector  
Fig. 41 Continued

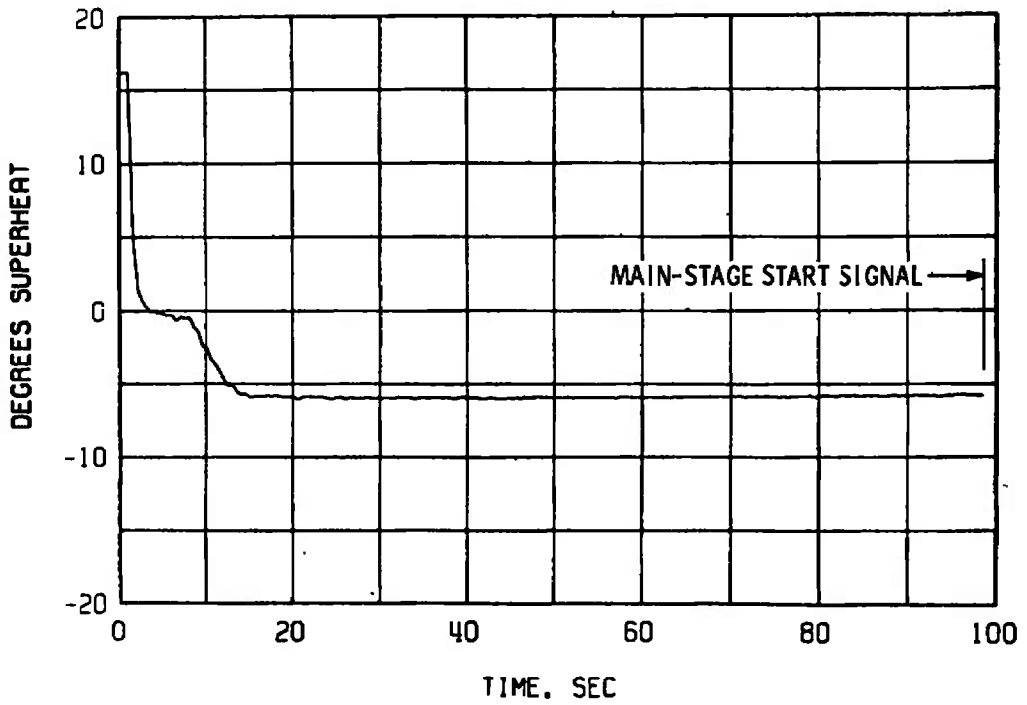

e. Fuel Pump Inlet

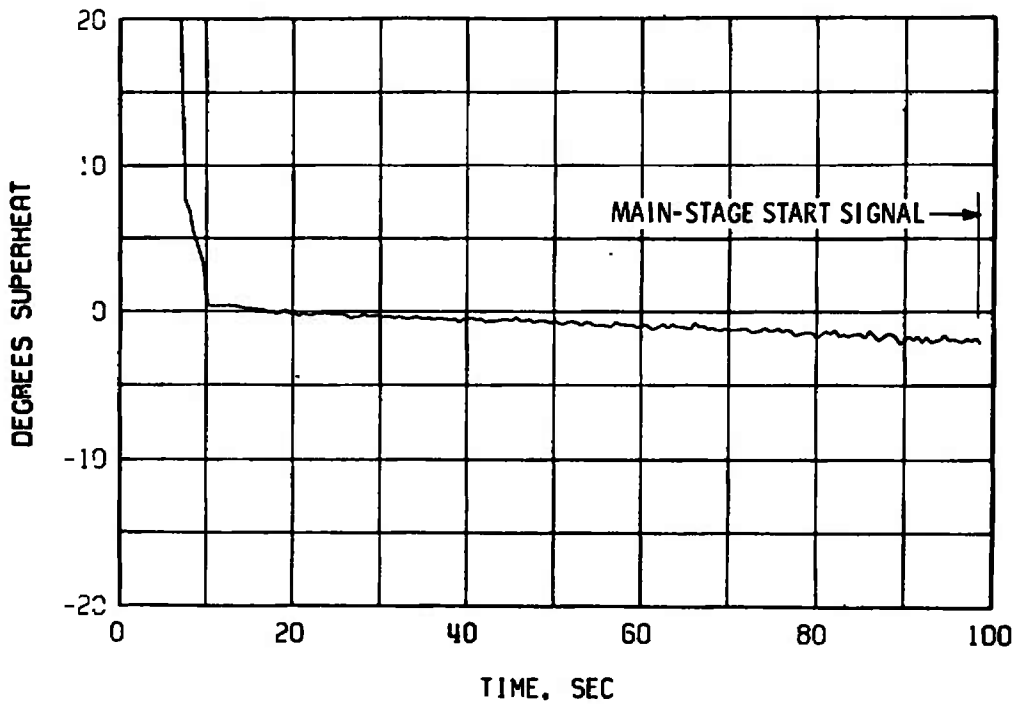

f. Fuel Pump Discharge  
Fig. 41 Continued

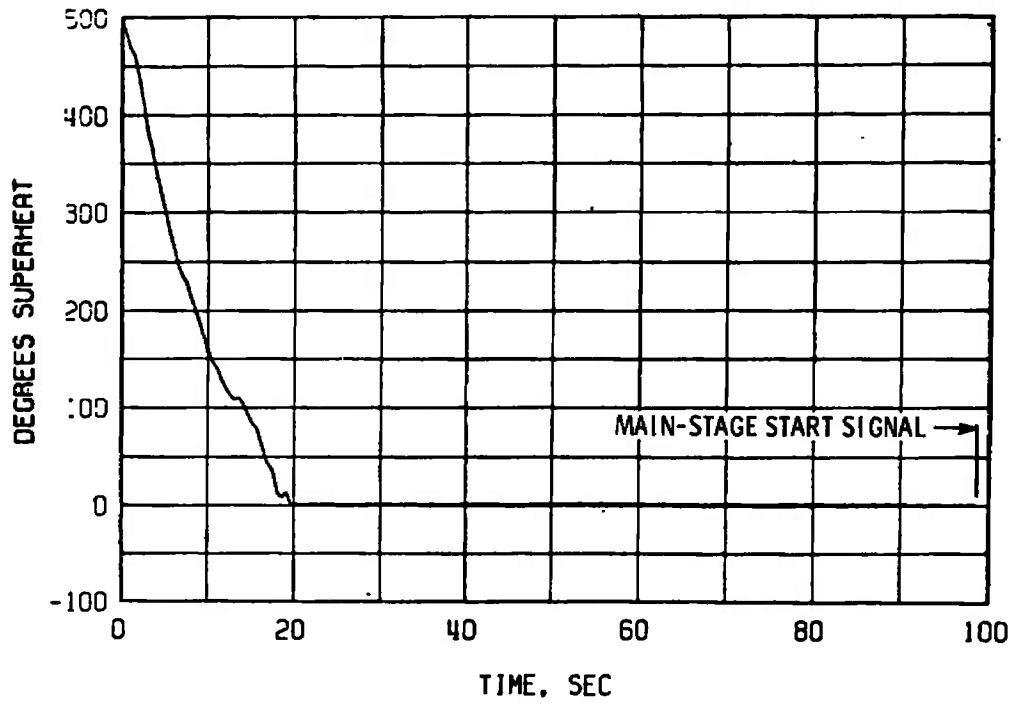

g. Fuel Injector  
Fig. 41 Concluded

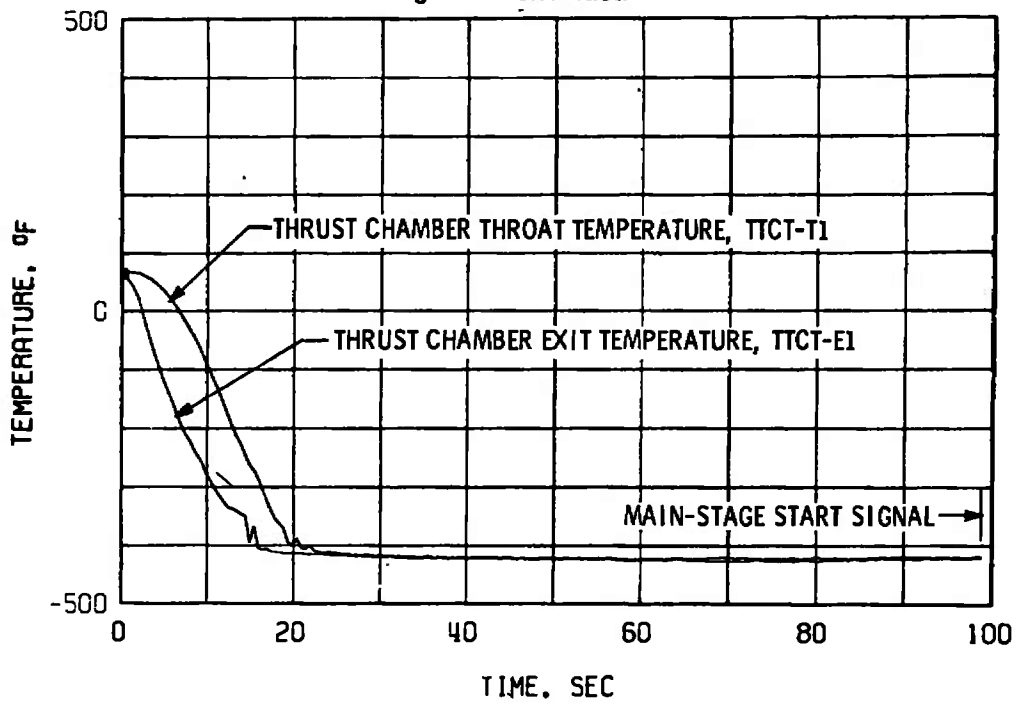


Fig. 42 Thrust Chamber External Skin Temperature, Firing 11C

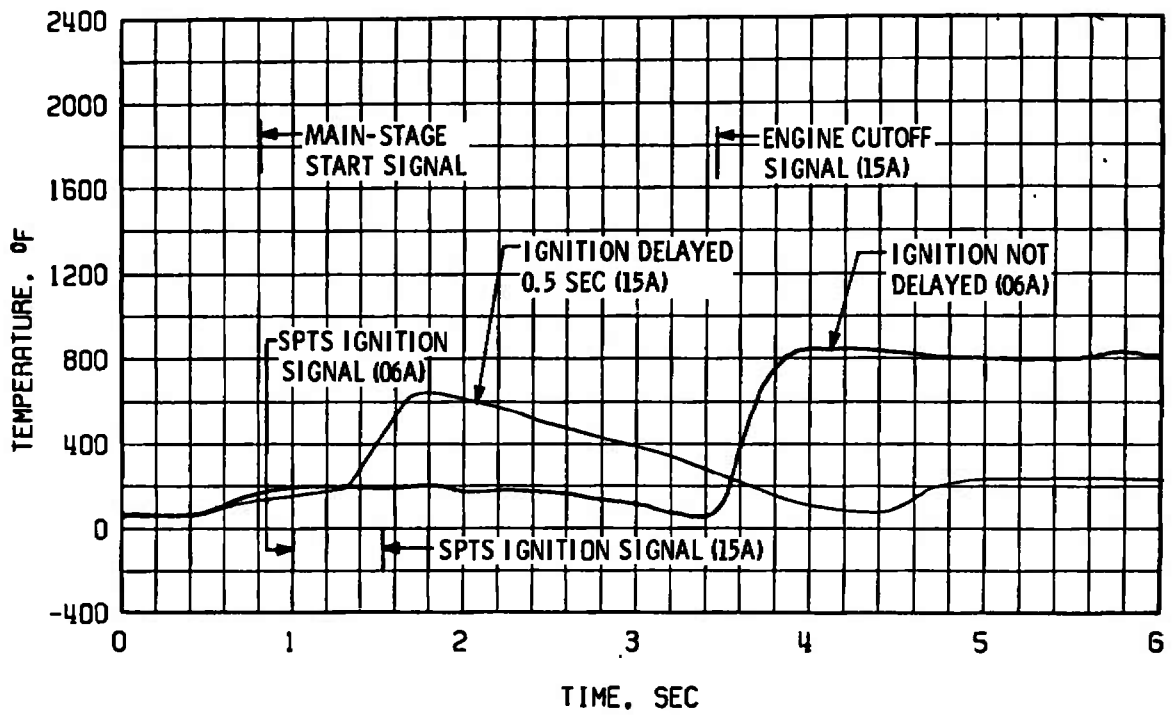


Fig. 43 Hot Gas Tapoff Manifold Temperature

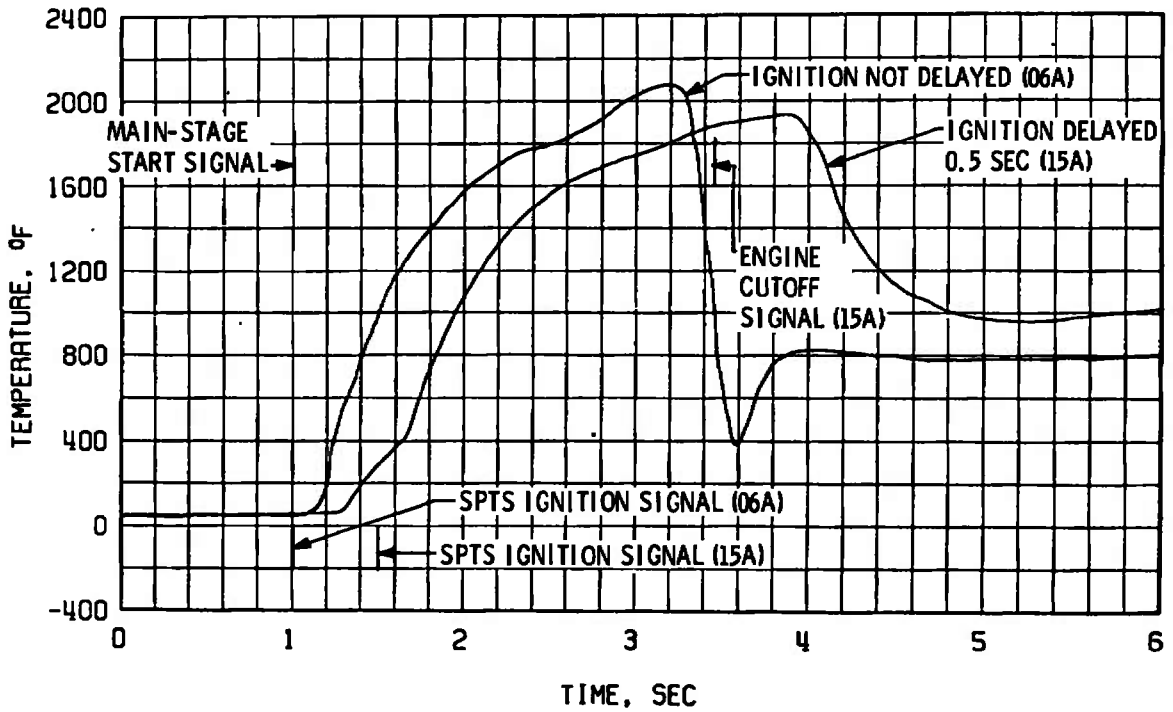


Fig. 44 Fuel Turbine Inlet Temperature

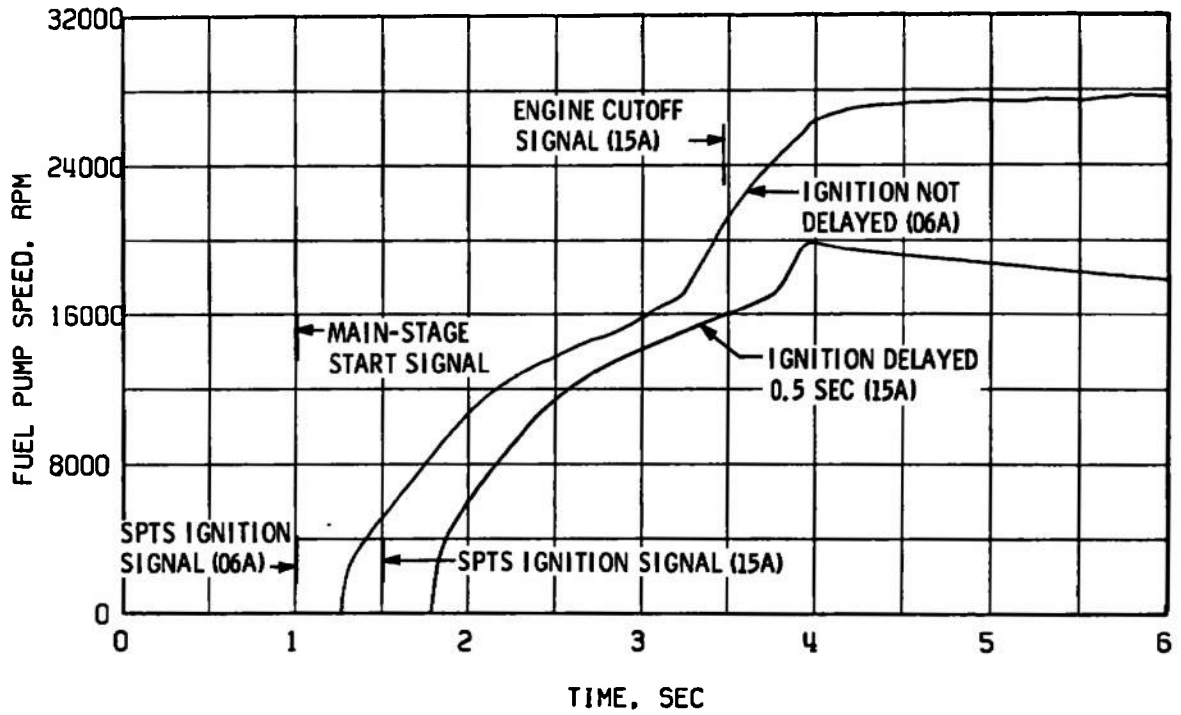


Fig. 45 Fuel Turbine Speed

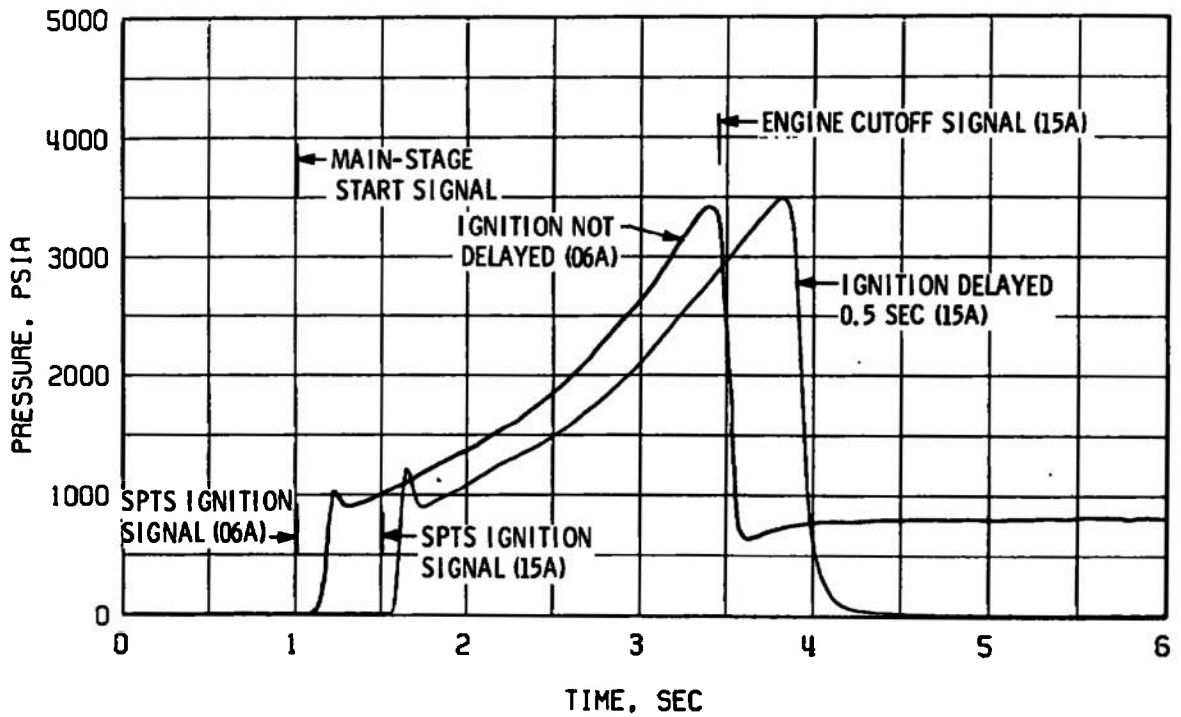


Fig. 46 Solid-Propellant Turbine Starter Chamber Pressure

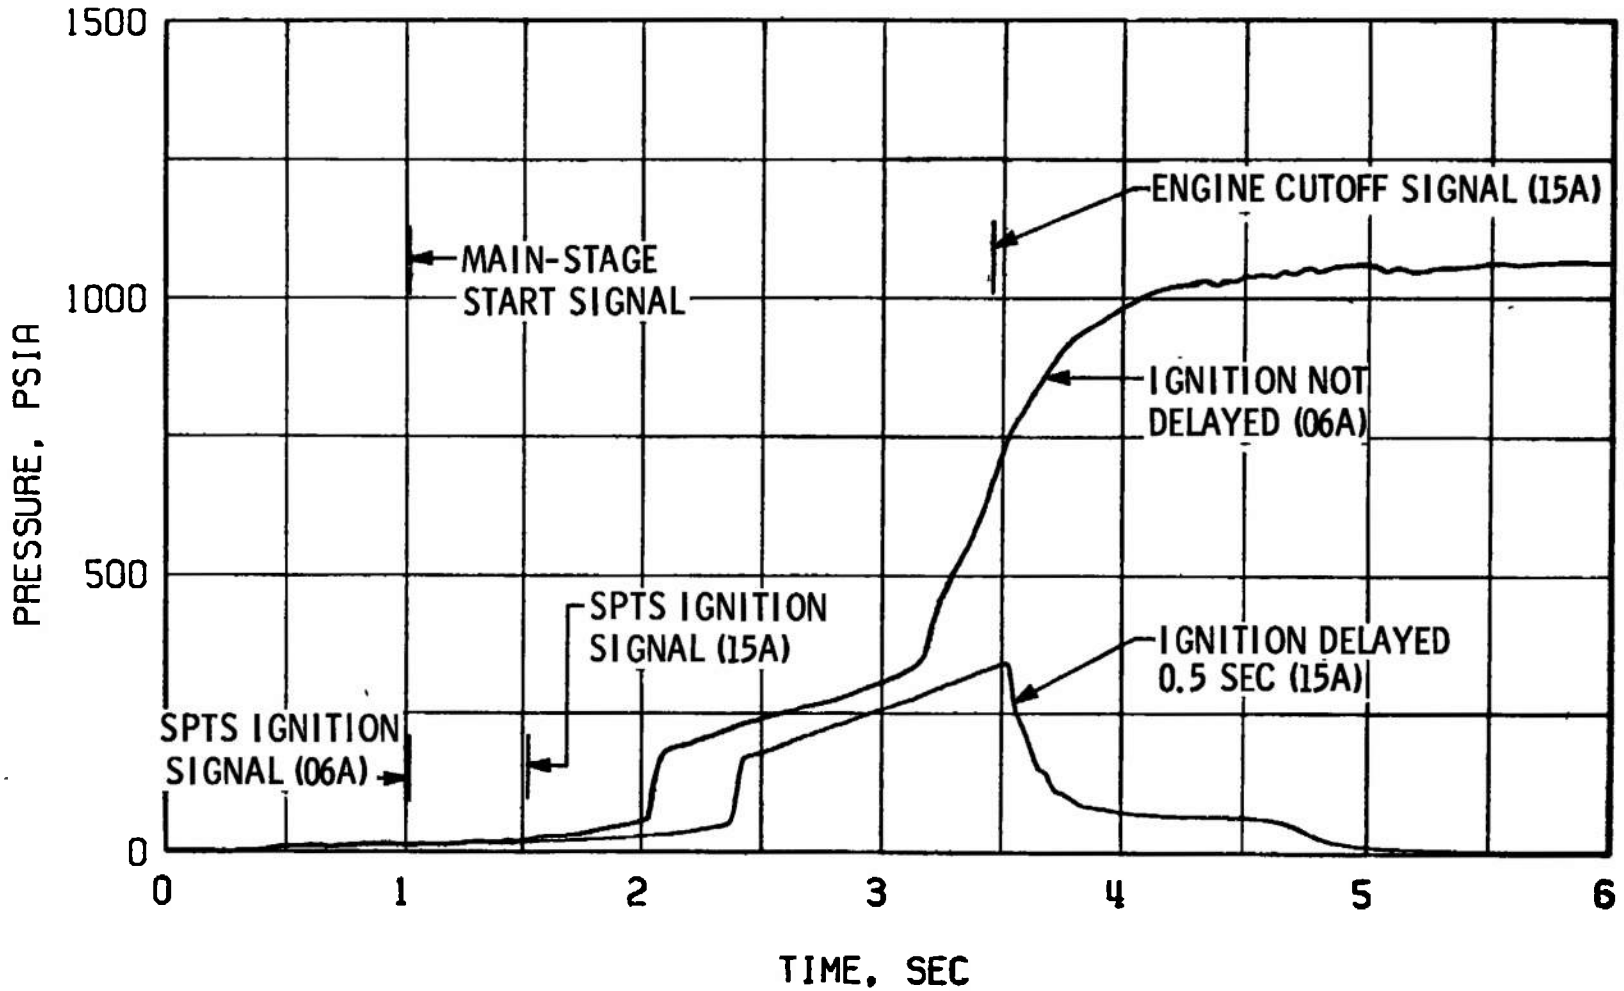


Fig. 47 Engine Combustion Chamber Pressure, PC-1P

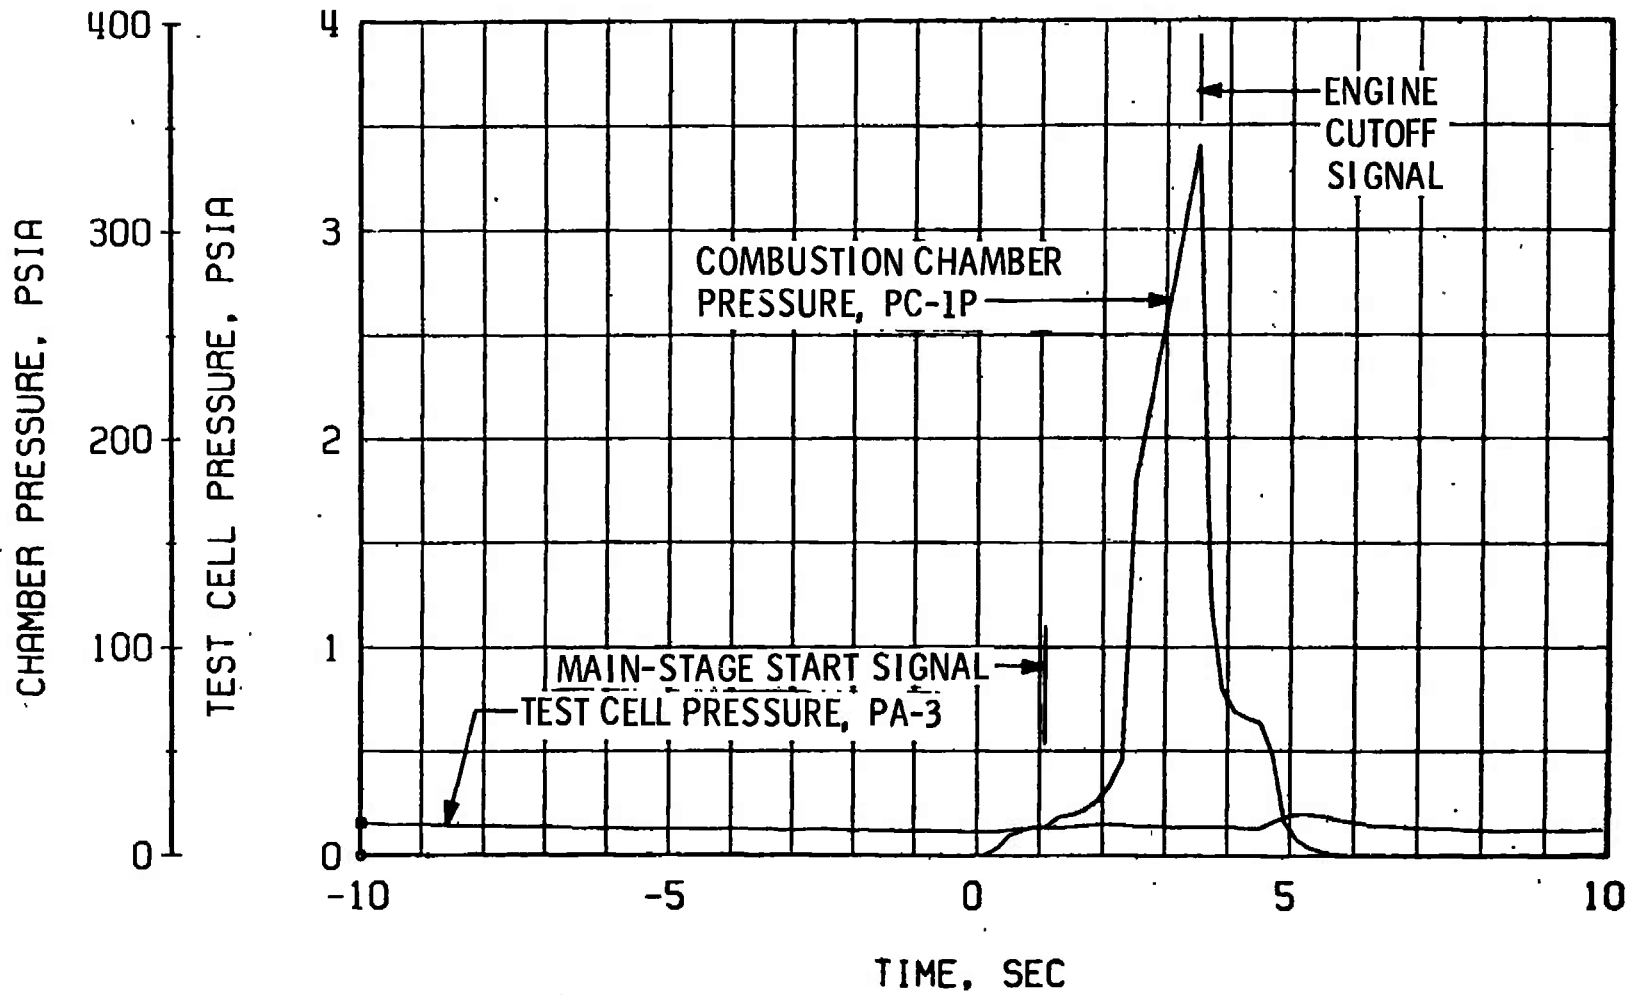


Fig. 48 Engine Ambient and Combustion Chamber Pressure, Firing 15A



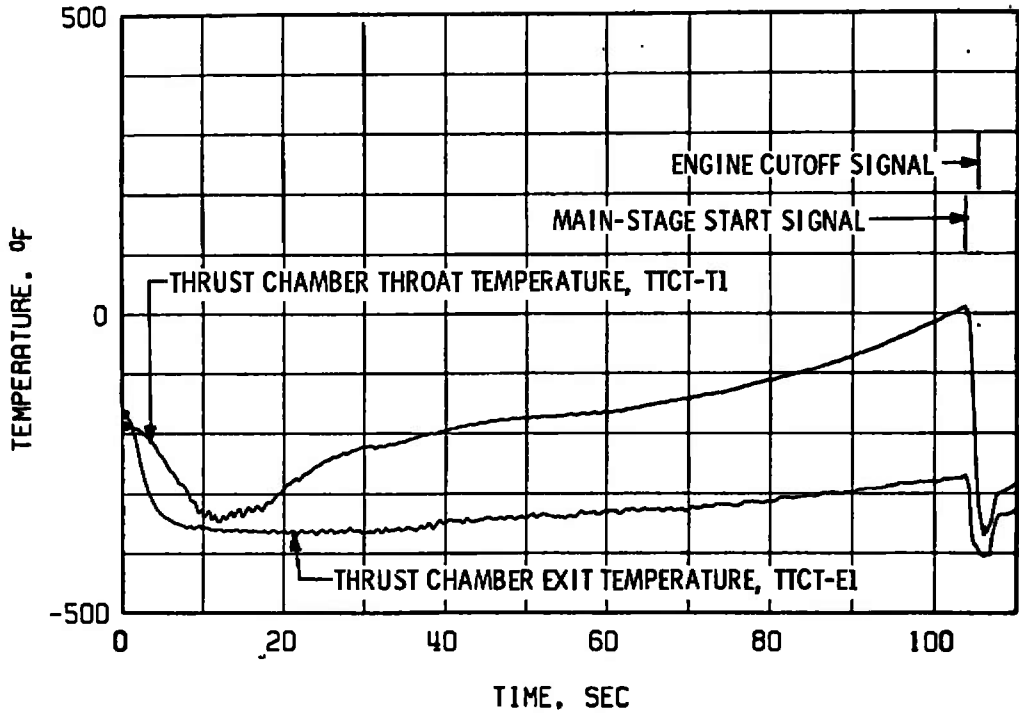


Fig. 49 Thrust Chamber Throat External Skin Temperature, Firing 15B

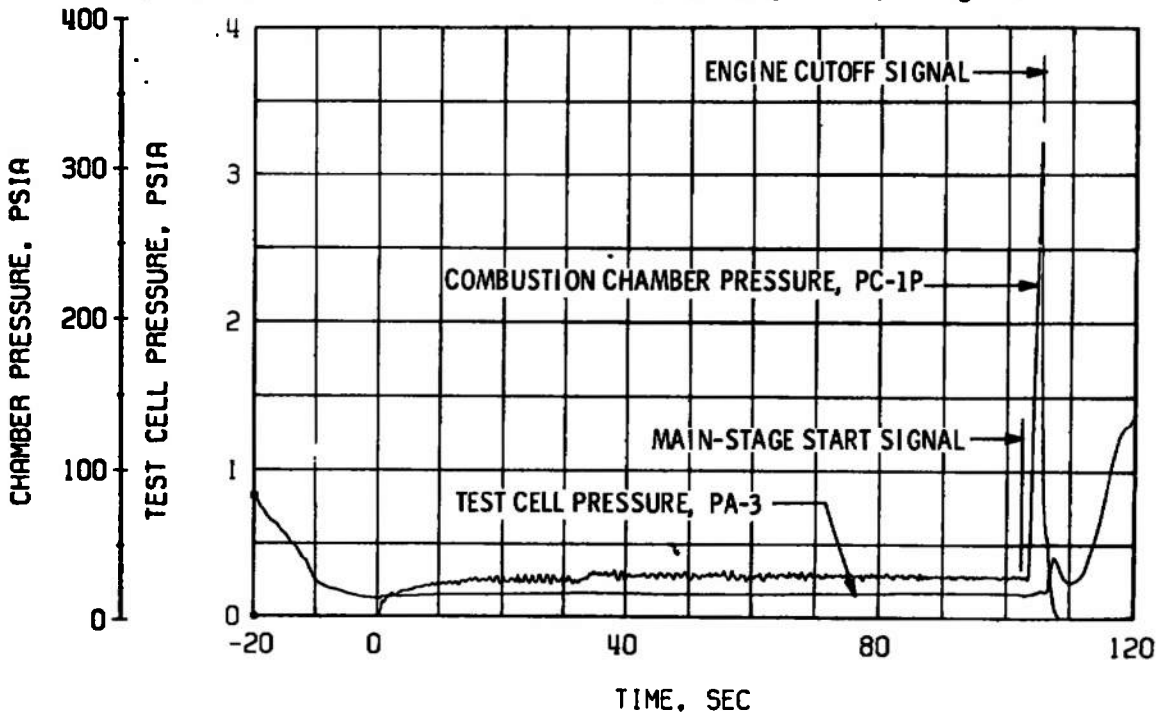


Fig. 50 Engine Ambient and Combustion Chamber Pressure, Firing 15B



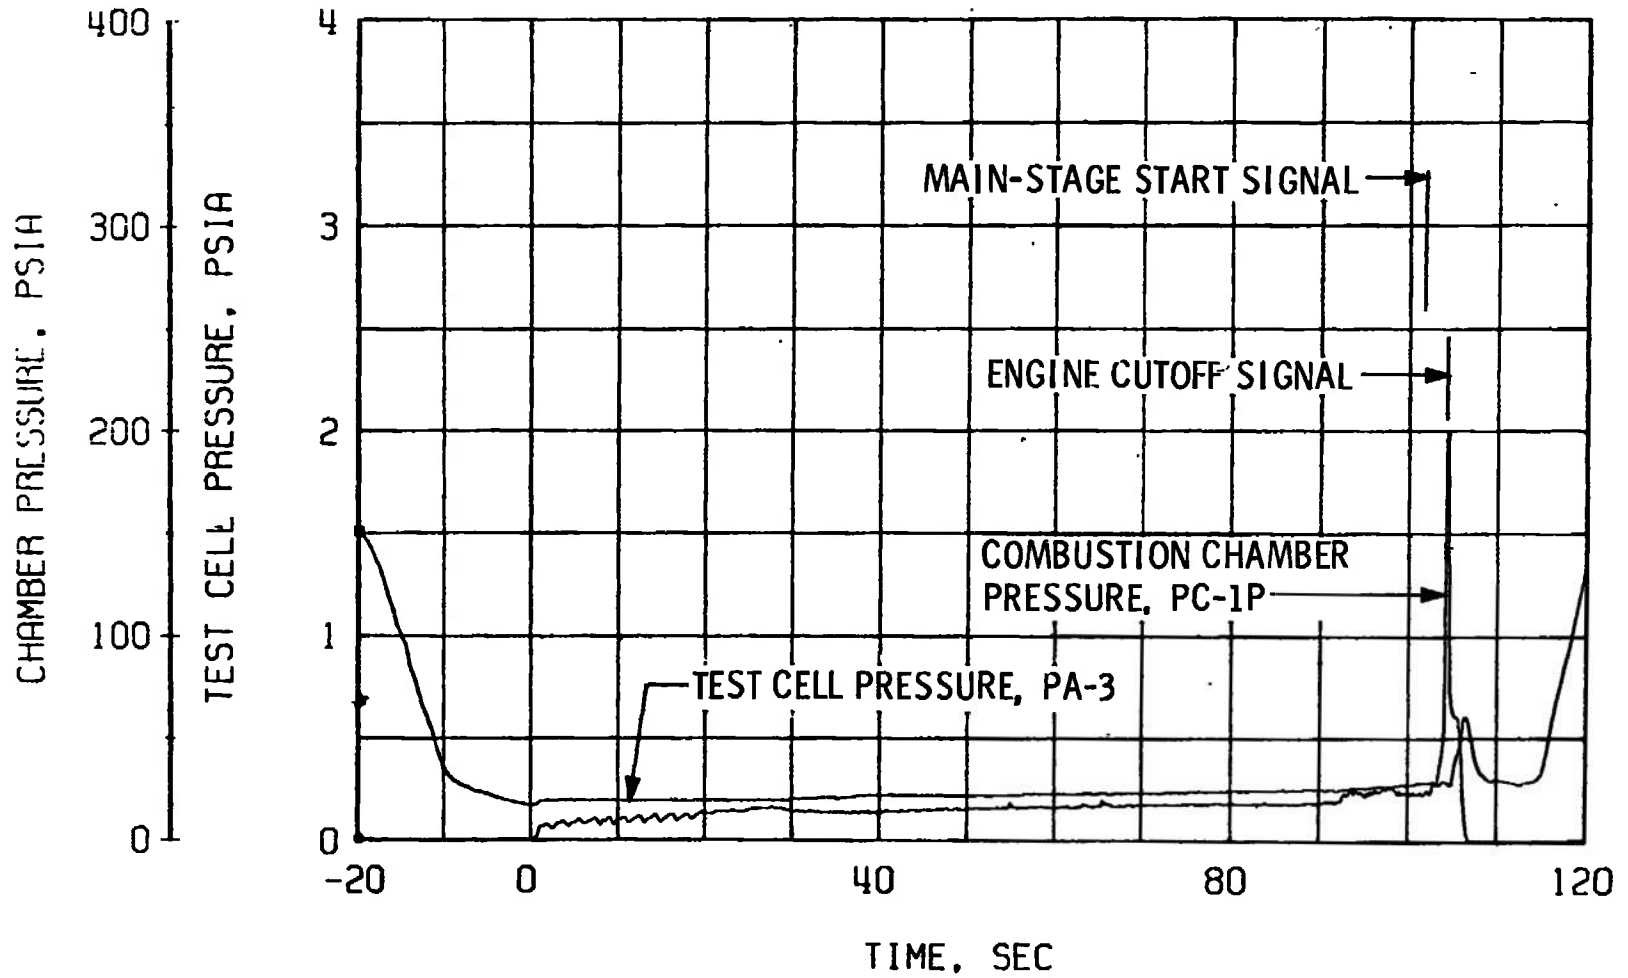


Fig. 51 Engine Ambient and Combustion Chamber Pressure, Firing 15C

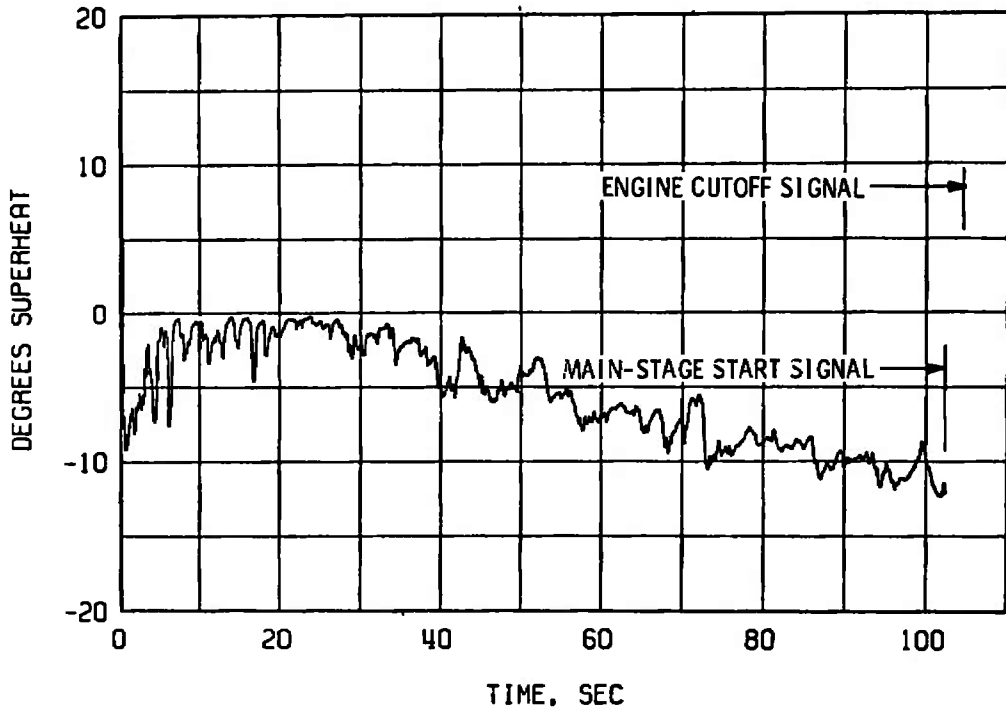


a. Oxidizer Pump Inlet

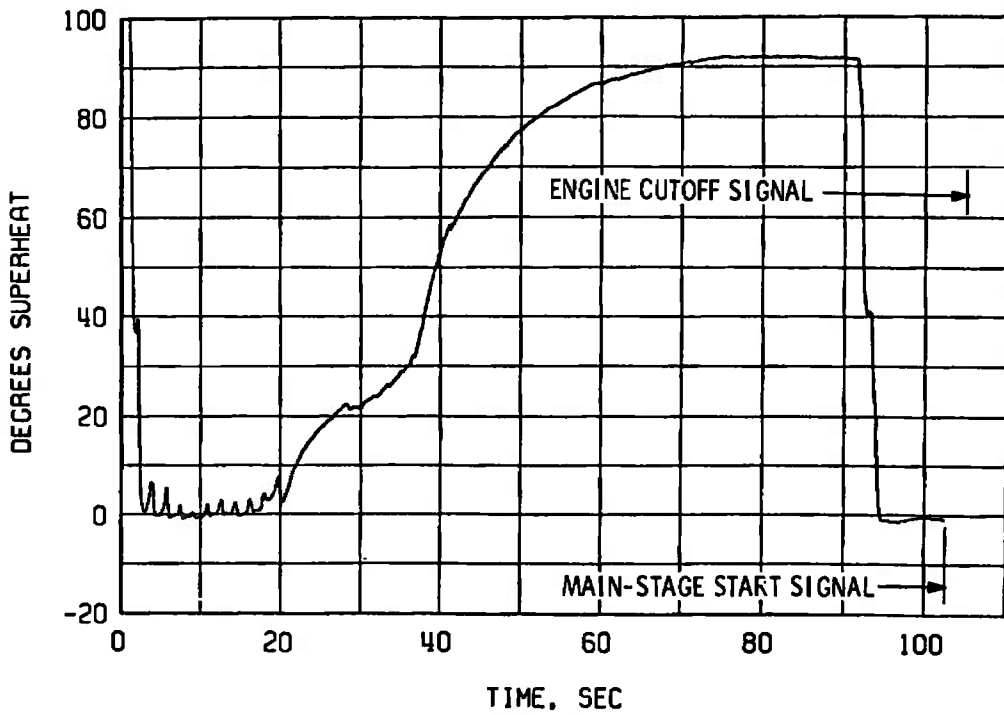


b. Oxidizer Pump Discharge


Fig. 52 Propellant Feed System Condition during Idle Mode, Firing 15C

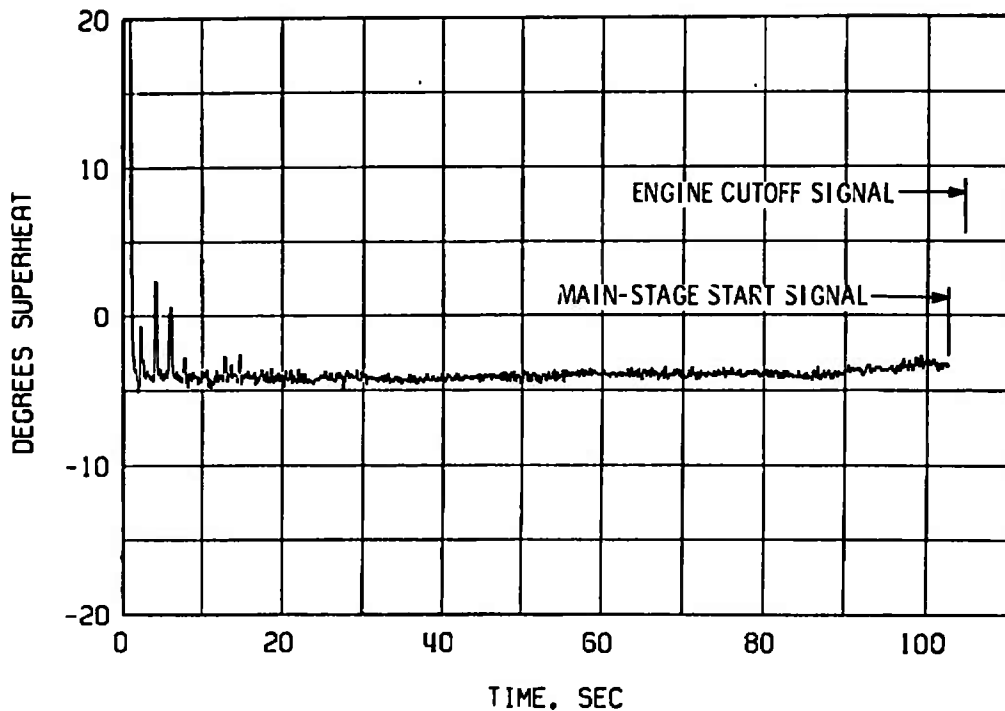


c. Oxidizer Idle-Mode Line

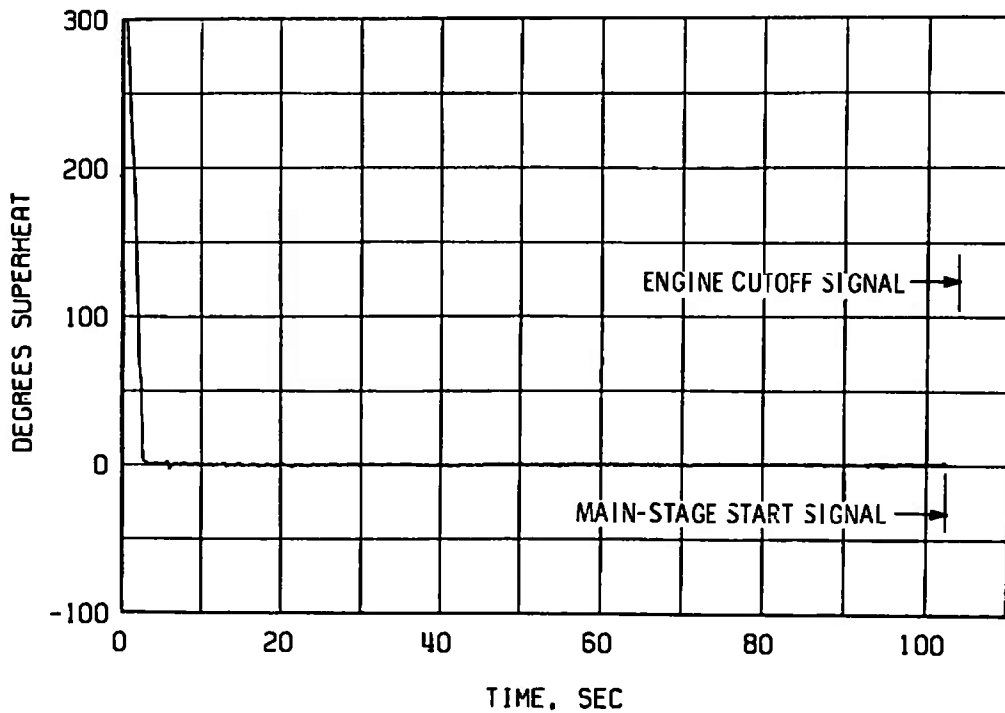


d. Oxidizer Injector  
Fig. 52 Continued

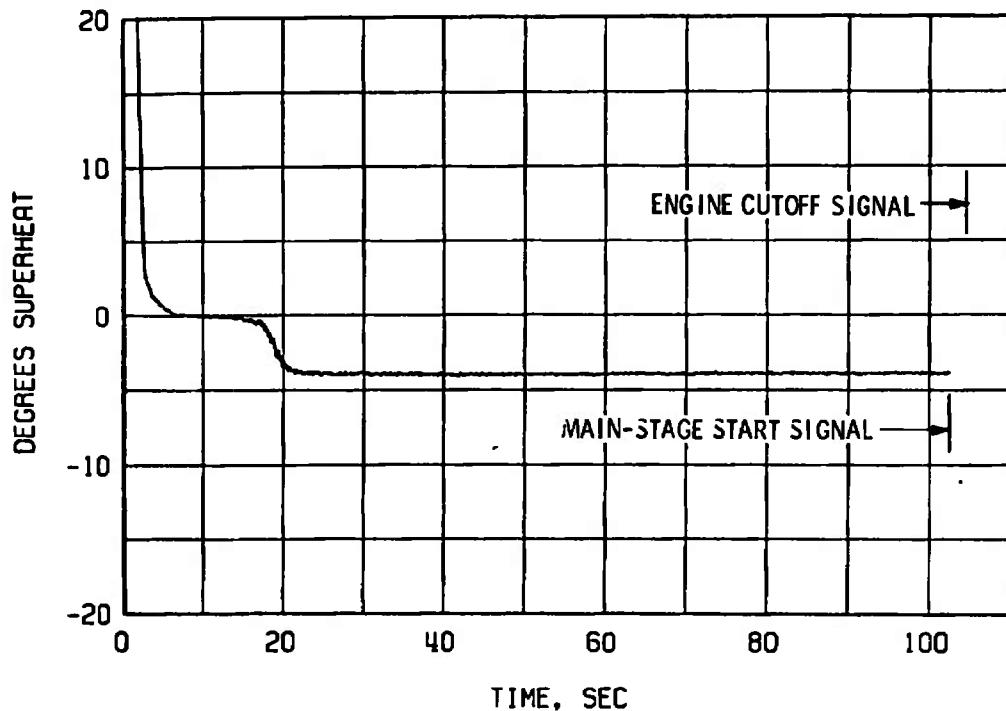

e. Fuel Pump Inlet

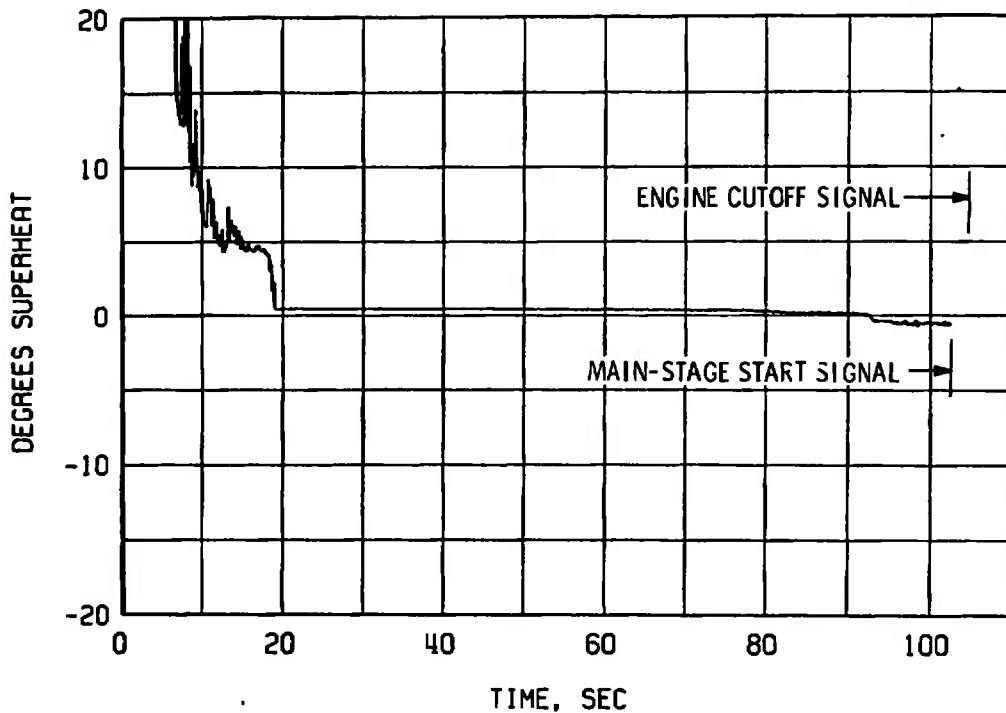

f. Fuel Pump Discharge  
Fig. 52 Continued

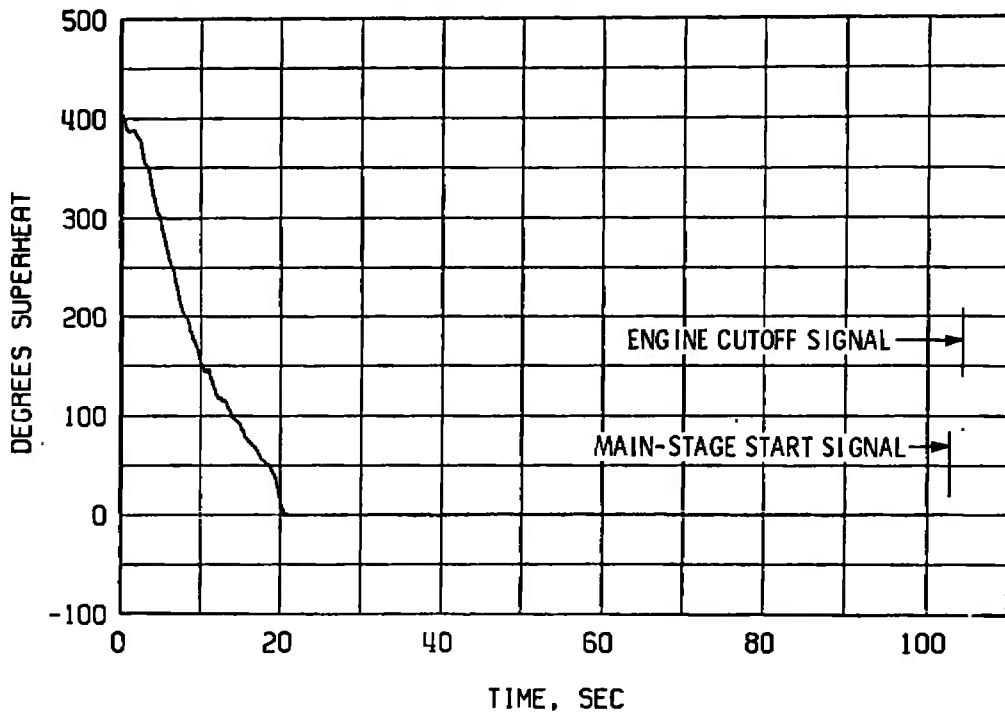

g. Fuel Injector  
Fig. 52 Concluded

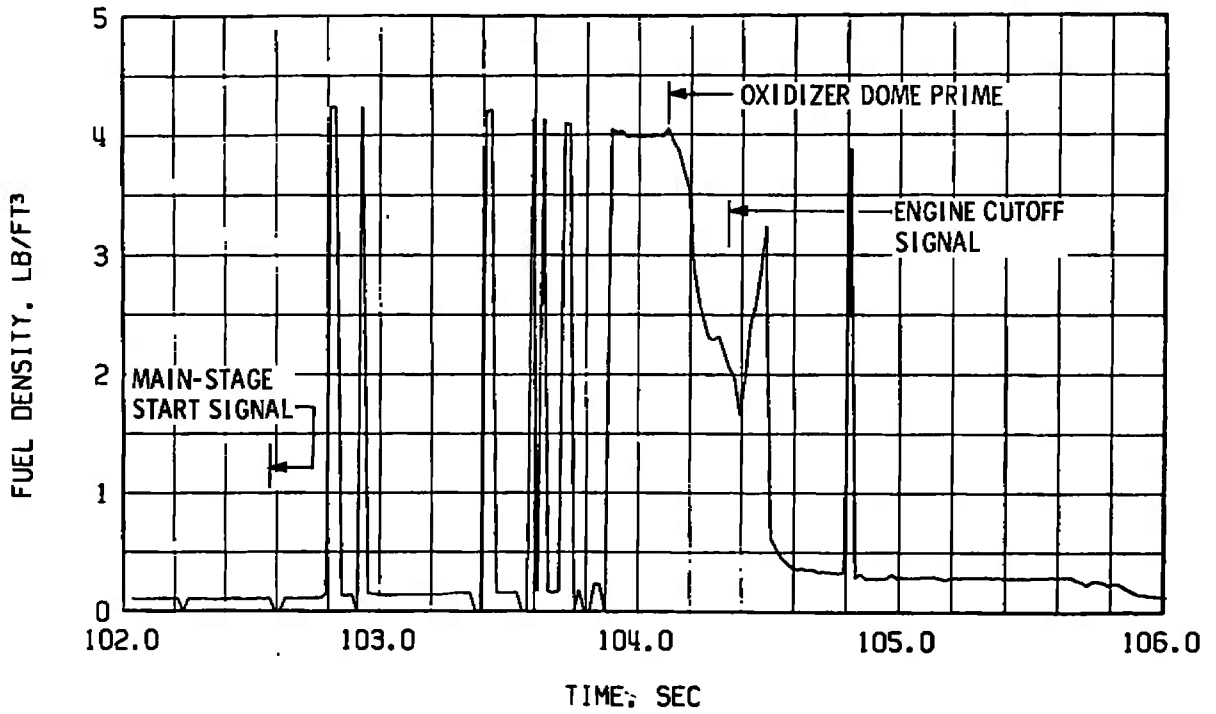


Fig. 53 Fuel Density at the Fuel Injector, Firing 15C

**TABLE I**  
**MAJOR ENGINE COMPONENTS**  
**(EFFECTIVE TEST J4-1001-06)**

<u>Part Name</u>	<u>P/N</u>	<u>S/N</u>
Thrust Chamber Body Assembly	99-210620	4094439
Thrust Chamber Injector Assembly	XEOR 937173	4087380
Augmented Spark Igniter Assembly	*EWR 113811-21	4901310
Ignition Detector Probe No. 1	3243-2	016
Ignition Detector Probe No. 2	3243-1	003X
Fuel Turbopump Assembly	99-461500-31	R004-1A
Oxidizer Turbopump Assembly	99-460430-21	S003-0A
Main Fuel Valve	99-411320-X3	8900881
Main Oxidizer Valve	99-411225-X4	8900929
Idle-Mode Valve	99-411385	8900867
Thrust Chamber Bypass Valve	99-411180-X2	8900806
Hot Gas Tapoff Valve	99-557824-X2	8900847
Propellant Utilization Valve	99-251455-X5	8900911
Electrical Control Package	99-503670	4098176
Engine Instrumentation Package	99-704641	4097437
Pneumatic Control Package	99-558330	8900817
Restart Control Assembly	99-503680	4097867
Helium Tank Assembly	NA5-260212-1	0002
Oxidizer Flowmeter	251216	4096874
Fuel Flowmeter	251225	4096875
Fuel Inlet Duct Assembly	409900-11	6631788
Oxidizer Inlet Duct Assembly	409899	4052289
Fuel Pump Discharge Duct	99-411082-7	439
Oxidizer Pump Discharge Duct	99-411082-5	439
Thrust Chamber Bypass Duct	99-411079	439
Fuel Turbine Exhaust Bypass Duct	307879-11	2143580
Hot Gas Tapoff Duct	99-411080-51	7239768
Solid-Propellant Turbine Starters Manifold	99-210921-11	7216433
Heat Exchanger Assembly (Coil)	307885	8363045
Oxidizer Turbine Exhaust Duct	307887	2142922
Crossover Duct	307879-11	2143580

\*Rocketdyne Engineering Work Request

TABLE II  
SUMMARY OF ENGINE ORIFICES

Orifice Name	Part Number	Diameter, in.	Test Effective	Comments
Oxidizer Turbine Bypass	99-210924	1.996 1.695	J4-1902-05 J4-1001-07	Delivered Part EWR 121319
Fuel Bypass	99-406384	1.750 1.500	J4-1001-06 J4-1001-08	EWR 121311 EWR 121320
Oxidizer Idle-Mode Supply Line	99-411092	0.848 0.977 0.911	J4-1001-06 J4-1001-07 J4-1001-15	EWR 121308 EWR 121315 EWR 121386
Main Oxidizer Valve Closing Control	99-411279	33.25 scfm	J4-1902-05	Thermostatic Orifice
Augmented Spark Igniter Oxidizer Supply Line	652050	0.0999	J4-1902-05	Delivered Part
Augmented Spark Igniter Fuel Supply Line			J4-1902-05	None Installed
Film Coolant	99-411094	0.581	J4-1902-08	
Film Coolant Venturi		1.027 inlet 0.744 throat	J4-1902-05	$C_D = 0.97$
Propellant Utilization Valve Inlet	XEOR 934826	1.250	J4-1902-05	Delivered Part



**TABLE III**  
**ENGINE MODIFICATIONS**  
**(BETWEEN TESTS J4-1001-05 AND J4-1001-15)**

Modification Number	Completion Date	Description of Modification
Test J4-1001-05, 7/29/69		
121306	8/22/69	Load Cell Installation
121307	8/24/69	Decreased Main Oxidizer Valve 1st Stage Opening from 14 to 11.5 deg
Test J4-1001-06, 8/25/69		
121314	8/27/69	Decreased Main Oxidizer Valve 1st Stage Opening from 11.5 to 10.5 deg
121317	8/27/69	Insulated Oxidizer Idle-Mode Supply Line
121319	8/27/69	Decreased Hot Gas Tapoff Valve Mechanical Stop from 1.321 to 1.260 in.
121357	8/27/69	Insulated Oxidizer High Pressure Duct from Pump to Idle-Mode Valve
Test J4-1001-07, 8/28/69		
121367	9/12/69	Increased Hot Gas Tapoff Valve Mechanical Stop from 1.260 to 1.321 in.
121369	9/12/69	Repair Thrust Chamber Damage Found Post Test J4-1001-09
Test J4-1001-11, 9/17/69		
121326	9/30/69	Installed Oxidizer Pump Seal Drain Shutoff Valve
121382	10/9/69	Repair Thrust Chamber Damage Found Post Test J4-1001-13
121329	10/14/69	Removed Bypass Line in the Fuel Augmented Spark Igniter Supply Line (Back to Original Configuration)
121384	10/28/69	Increased Main Oxidizer Valve 1st Stage Opening from 10.5 to 11.7 deg
Test J4-1001-15, 10/29/69		

**TABLE IV  
ENGINE COMPONENT REPLACEMENTS  
(BETWEEN TESTS J4-1001-05 AND J4-1001-15)**

Replacement	Completion Date	Component Replaced
Test J4-1001-05, 7/29/69		
P/N 558022 S/N 2137946	8/22/69	Helium Fill Check Valve P/N 558022, S/N 2137943
P/N XEOR 937173 S/N 4087380	8/22/69	Thrust Chamber Injector Assembly, P/N XEOR 936648, S/N 4087384
P/N C-47930 S/N 645700	8/22/69	Gimbal Bearing Assembly P/N 208900, S/N 8362333
Test J4-1001-06, 8/25/69		
None		
Test J4-1001-07, 8/28/69		
None		
Test J4-1001-11, 9/17/69		
P/N 309065-31 S/N 2203033 (Poppet)	10/8/69	Hot Gas Check Valve (Flapper), P/N 309065, S/N 2138829
P/N 210610-81 S/N 4087387	10/10/69	Thrust Chamber Injector Assembly, P/N XEOR 937173, S/N 4087380
P/N 99-503670-21 S/N 4097588	10/28/69	Electrical Control Assembly, P/N 99-503670 S/N 4098176
Test J4-1001-15, 10/29/69		

**TABLE V  
ENGINE PURGE AND COMPONENT CONDITIONING SEQUENCE**

AEDC-TR-70-204

Purge	Requirement	SPTS Installed	Air On	Propellant Drop	Engine Start	Cutoff	Coast Period	Propellant Drop	Restart	Cutoff (Last Firing)	Air Off
Oxidizer dome and idle-mode diffuser	Nitrogen, 600 ± 25 psia 100 to 150°F at customer connect panel (150 scfm)		▨	▨		▨	▨			▨	
Thrust chamber jacket, film coolant, and turbopump purges	Helium, 150 ± 25 psia 50 to 150°F at customer connect panel (125 scfm)		▨ <sup>**</sup> †		(*)	▨ <sup>15 min (**)</sup> (†)	▨		(*)	▨ <sup>30 min</sup>	
SPTS conditioning	Nitrogen, -50 to 140°F	▨ <sup>1, 2, and 3</sup>				▨ <sup>Remaining SPTS</sup>					
Main fuel valve conditioning	Helium, -300°F to ambient			▨ <sup>††</sup>							

\*Engine-supplied oxidizer pump intermediate seal cavity purge  
 \*\*Anytime facility water is on  
 †30 min before propellant drop  
 ††Initiate mfV conditioning 30 min before engine start for those firings with temperature requirements

TABLE VI  
SUMMARY OF TEST REQUIREMENTS AND RESULTS

FIRING NUMBER	J4-1001-06A		J4-1001-06B		J4-1001-07A		J4-1001-07B		J4-1001-07C		J4-1001-11A		J4-1001-11B		J4-1001-11C		J4-1001-15A		J4-1001-15B		J4-1001-15C		
	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	Target	Actual	
FIRING DATE/TIME OF DAY	8/25/69 1209		9/25/68 1739		8/28/69 1235		8/28/68 1405		8/28/69 1715		9/17/69 1254		9/17/69 1509		9/17/69 2036		10/29/69 1521		10/29/69 1919		10/29/69 2025		
Pressure Altitude at t-0, ft (Ref. 1)	100,000	102,000	100,000	96,000	100,000	95,000	100,000	99,000	100,000	100,000	100,000	80,000	100,000	100,000	100,000	107,000	100,000	108,000	100,000	109,100	100,000	98,000	
Low Thrust Idle-Mode Duration, sec *	1.0	1.01	50.0	50.06	50.0	49.62	50.0	50.90	50.0	50.01	100.0	98.12	75.0	75.98	100.0	88.73	1.0	1.02	100.0	102.71	100.0	102.54	
Main-Stage Duration, sec *	7.5	7.68	7.5	1.52	7.5	7.78	7.5	7.42	7.5	7.62	5.0	1.33	4.5	4.74	4.5	1.68	2.4	2.43	2.4	2.42	2.4	1.79	
Post-Main-Stage Idle-Mode Duration, sec *	10.0	10.25	10.0	-	10.0	10.28	10.0	10.49	-	-	10.0	-	-	-	-	-	-	-	-	-	-	-	
Fuel Pump Inlet Pressure at t-0, psia	33±1.0	33.0	33±1.0	33.3	33±1.0	33.2	33±1.0	33.4	40±1.0	41.8	40.0±1.0	41.1	27.0±1.0	27.9	40.0±1.0	39.7	30±1	29.9	28±1	30.1	33±1	32.4	
Fuel Pump Inlet Temperature at t-0, °F	-	-416.8	-	-413.2	-	-417.8	-	-203.6	-	-416.1	-	-	-	-419.0	-	-295.6	-	-418.5	-	-417.8	-	-210.5	
Fuel Tank Bulk Temperature at t-0, °F	-422.0±0.4	-422.4	-422.0±0.4	-422.3	-422.0±0.4	-422.4	-422.0±0.4	-422.1	-422.0±0.4	-422.0	-422.0±0.4	-422.5	-422.0±0.4	-422.4	-422.0±0.4	-422.4	-422.0±0.4	-422.8	-422.0±0.4	-422.2	-422.0±0.4	-422.4	
Oxidizer Pump Inlet Pressure at t-0, psia	39±1.0	39.8	39±1.0	39.3	39±1.0	39.2	46±1.0	46.0	39±1.0	39.3	33.0±1.0	39.7	33.0±1.0	40.3	33.0±1.0	31.7	39±1	39.2	44±1	44.7	34±1	32.5	
Oxidizer Pump Inlet Temperature at t-0, °F	-	-292.2	-	-279.6	-	-291.2	-	-278.4	-	-278.6	-	-117.4	-	-277.1	-	-291.0	-	-292.6	-	-278.9	-	-290.1	
Oxidizer Tank Bulk Temperature at t-0, °F	-295.0±0.4	-295.4	-295.0±0.4	-295.4	-295.0±0.4	-294.6	-295.0±0.4	-295.0	-285.0±0.4	-295.1	-295.0±0.4	-295.2	-295.0±0.4	-295.3	-295.0±0.4	-294.9	-295.0±0.4	-295.5	-295.0±0.4	-295.7	-295.0±0.4	-294.7	
Helium Tank Pressure at t-0, psia	3450 <sup>+0</sup> <sub>-200</sub>	3430	Remains From "A"	3200	3450 <sup>+0</sup> <sub>-200</sub>	3410	Remains From "A"	3196	Remains From "B"	3007	3450 <sup>+0</sup> <sub>-200</sub>	3318	Remains From "A"	2982	Remains From "B"	2900	3450 <sup>+0</sup> <sub>-200</sub>	3383	Remains From "A"	3092	Remains From "B"	2883	
Helium Tank Temperature at t-0, °F	-	101	-	81	-	111	-	83	-	78	-	119	-	77	-	85	-	112	-	82	-	68	
Main Fuel Valve Temperature at t-0, °F	-100 <sup>+0</sup> <sub>-50</sub>	-128	-	-	-	92	-	112	-	103	-	106	-	90	-	108	-100 <sup>+0</sup> <sub>-50</sub>	-121	-	-305	-	-39	
Augmented Spark Igniter Ignition Detected, sec (Ref. t-0)	0.686		0.511		0.534		0.349		0.588		0.698		0.518		0.849		0.485		0.380		0.640		
Propellant Utilization Valve Position at t-0	NULL		NULL		NULL		NULL		NULL		NULL		NULL		NULL		NULL		NULL		NULL		
Thrust Chamber Temperature at t-0, °F	-100 <sup>+0</sup> <sub>-50</sub>	63	-	31	-	74	-	67	-	70	-	70	-	1	-	67	-	59	-200±50	-187	-25±25	3	
Oxidizer Pump Bearing Temperature at t-5, °F	-	-288	-100±20	-116	-	-288	-100±30	-84	-100±30	-278	-	98	-	-276	-100±20	-128	-	-288	-	-292	-25±25	-64	
Solid-Propellant Turbine Starter	Part Number	99803527-11		99803527-11		99803527-11		99803527-11		99803527-11		99803527-11		99803527-11		99803527-11		99803527-11		99803527-11		99803527-11	
	Serial Number	RT000013		RT000014		RT000019		RT000020		RT000021		RT000015		RT000022		RT000027		RT000028		RT000029		RT000006	
	Temperature at t-0, °F	50±10	40	50±10	41	50±10	44	130±10	120	50±10	49	130±10	132	130±10	123	50±10	38	50±10	78	50±10	57	50±10	52
	Burn Time, sec *	2.234		2.242		2.400		1.975		2.320		1.929		1.965		2.386		2.190		1.907		2.330	
Maximum Pressure, psia	3510		3565		3275		3824		3255		4105		3856		3317		3498		3504		3361		

\*Data reduced from oscillogram

**TABLE VII  
ENGINE VALVE TIMINGS**

KAI001	Firing	Start																	
		Main Fuel Valve			Idle-Main Oxidiser Valve			In. Gas Tapoff Valve			Main Oxidiser Valve First Stage			Main Oxidiser Valve Second Stage			Tirust Chamber Bypass Valve		
		Time of Opening Signal	Valve Delay Time, sec	Valve Opening Time, sec	Time of Opening Signal	Valve Delay Time, sec	Valve Opening Time, sec	Time of Opening Signal	Valve Delay Time, sec	Valve Opening Time, sec	Time of Opening Signal	Valve Delay Time, sec	Valve Opening Time, sec	Time of Opening Signal	Valve Delay Time, sec	Valve Opening Time, sec	Time of Closing Signal	Valve Delay Time, sec	Valve Closing Time, sec
00	Final Sequence	0 0	0 045	0 064	0 0	0 115	0 045	4 093	0 158	0 080	4 502	0 064	0 032	5 551	0 182	0 050	6 502	0 220	0 065
08	A	0 0	0 052	0 040	0 0	0 130	0 040	1 012	0 180	0 080	1 012	0 007	0 033	2 800	0 242	0 030	8 090	0 155	1 055
08	B	0 0	0 052	0 052	0 0	0 117	0 057	50 025	0 157	0 082	50 062	1 050	0 028	N/A	---	---	N/A	---	---
07	Final Sequence	0 0	0 048	0 040	0 0	0 118	0 042	5 430	0 153	0 091	6 480	0 054	0 020	8 315	0 158	0 025	5 315	0 218	0 075
07	A	0 0	0 050	0 044	0 0	0 112	0 040	56 872	0 155	0 082	56 078	0 070	0 027	51 517	0 150	0 080	61 517	0 150	1 105
07	B	2 0	0 050	0 045	0 0	0 10	0 041	50 960	0 160	0 085	50 020	0 082	0 028	63 702	0 201	0 085	53 798	0 180	1 010
07	C	0 0	0 050	0 050	0 0	0 115	0 040	50 200	0 153	0 090	50 000	0 078	0 022	51 825	0 153	0 028	5 832	0 190	0 850
11	Final Sequence	0 3	0 043	0 031	0 0	0 118	0 042	4 078	0 141	0 082	4 252	0 052	0 030	5 052	0 105	0 020	5 055	0 170	0 085
11	A	0 0	0 063	0 048	0 0	0 112	0 042	68 124	0 152	0 050	66 534	0 082	0 024	N/A	---	---	N/A	---	---
11	B	0 0	0 062	0 049	0 0	0 115	0 042	75 874	0 165	0 070	70 874	0 082	0 020	77 570	0 225	0 054	77 570	0 180	1 122
11	C	0 0	0 064	0 051	2 0	0 115	0 040	88 782	0 128	0 058	80 720	0 082	0 028	N/A	---	---	N/A	---	---
25	Final Sequence	0 0	0 020	0 005	0 0	0 117	0 040	11 885	0 152	0 063	11 585	0 080	0 030	N/A	---	---	N/A	---	---
18	A	0 0	0 028	0 008	0 0	0 128	0 048	1 020	0 157	0 085	1 020	0 053	0 020	N/A	---	---	N/A	---	---
15	B	0 0	0 047	0 055	0 0	0 155	0 040	102 71	0 123	0 050	102 71	0 050	0 030	N/A	---	---	N/A	---	---
15	C	0 0	0 020	0 000	0 0	0 121	0 042	102 54	0 158	0 052	108 04	0 050	0 020	N/A	---	---	N/A	---	---

KAI001	Firing	Shutdown														
		Main Oxidiser Valve			Hot Gas Tapoff Valve			Main Fuel Valve			Idle-Main Oxidiser Valve			Tirust Chamber Bypass Valve		
		Time of Closing Signal	Valve Delay Time, sec	Valve Closing Time, sec	Time of Closing Signal	Valve Delay Time, sec	Valve Closing Time, sec	Time of Closing Signal	Valve Delay Time, sec	Valve Closing Time, sec	Time of Closing Signal	Valve Delay Time, sec	Valve Closing Time, sec	Time of Closing Signal	Valve Delay Time, sec	Valve Closing Time, sec
06	Final Sequence	12 384	0 001	2 145	18 364	0 067	0 845	17 578	0 072	0 251	17 278	0 069	0 113	12 354	0 242	0 228
05	A	8 528	0 084	0 155	8 585	0 084	0 230	15 515	0 075	0 225	16 815	0 072	0 150	8 808	0 242	0 210
05	B	51 588	0 040	0 030	51 288	0 044	0 224	51 588	0 074	0 250	51 505	0 084	0 122	N/A	---	---
07	Final Sequence	13 574	0 088	0 145	14 874	0 055	0 255	13 874	0 083	0 287	13 874	0 078	0 113	13 574	0 285	0 220
07	A	57 402	0 055	0 150	57 402	0 055	0 252	87 498	0 080	0 251	87 485	0 055	0 150	87 402	0 340	0 171
07	B	55 317	0 075	0 188	58 217	0 052	0 250	68 505	0 070	0 250	65 805	0 080	0 175	58 317	0 231	0 175
07	C	57 533	0 075	0 153	57 032	0 050	0 240	57 535	0 075	0 270	57 635	0 075	0 181	57 635	0 315	0 155
11	Final Sequence	0 135	0 082	0 044	2 135	0 070	0 810	5 135	0 260	0 253	2 125	0 275	0 512	9 135	0 287	0 222
11	A	82 442	0 040	0 030	82 845	0 050	0 820	26 448	0 073	0 242	25 442	0 053	0 102	N/A	---	---
11	B	82 722	0 080	0 173	82 785	0 070	0 220	60 721	0 082	0 830	50 723	0 080	0 152	50 788	0 222	0 152
11	C	100 222	0 040	0 012	120 252	0 072	0 210	108 362	0 072	0 252	100 258	0 077	0 124	N/A	---	---
10	Final Sequence	14 118	0 040	0 022	14 118	0 063	0 220	14 112	0 074	0 252	14 112	0 082	0 110	N/A	---	---
10	A	2 447	0 041	0 035	3 447	0 065	0 251	2 447	0 085	0 228	3 447	0 075	0 145	N/A	---	---
10	B	105 12	0 033	0 020	105 12	0 070	0 222	105 12	0 085	0 455	105 12	0 080	0 145	N/A	---	---
10	C	104 23	0 040	0 030	104 23	0 070	0 285	104 23	0 080	0 290	104 23	0 070	0 102	N/A	---	---


- Notes: 1. All valve signal times are referenced to 1-0.  
 2. Valve delay time is the time required for initial valve movement after the valve "open" or "closed" solenoid has been energized.  
 3. Final sequence check is conducted without propellant and within 12 hours before testing.  
 4. Data are reduced from oscillograph.  
 5. Main oxidiser valve first stage only.

### APPENDIX III


### INSTRUMENTATION

The instrumentation for AEDC tests J4-1001-06, -07, -11, and J4-1001-15 is tabulated in Table III-1. The location of selected major engine instrumentation is shown in Fig. III-1.

⊗ — AREA FIRE DETECTION THERMOCOUPLES

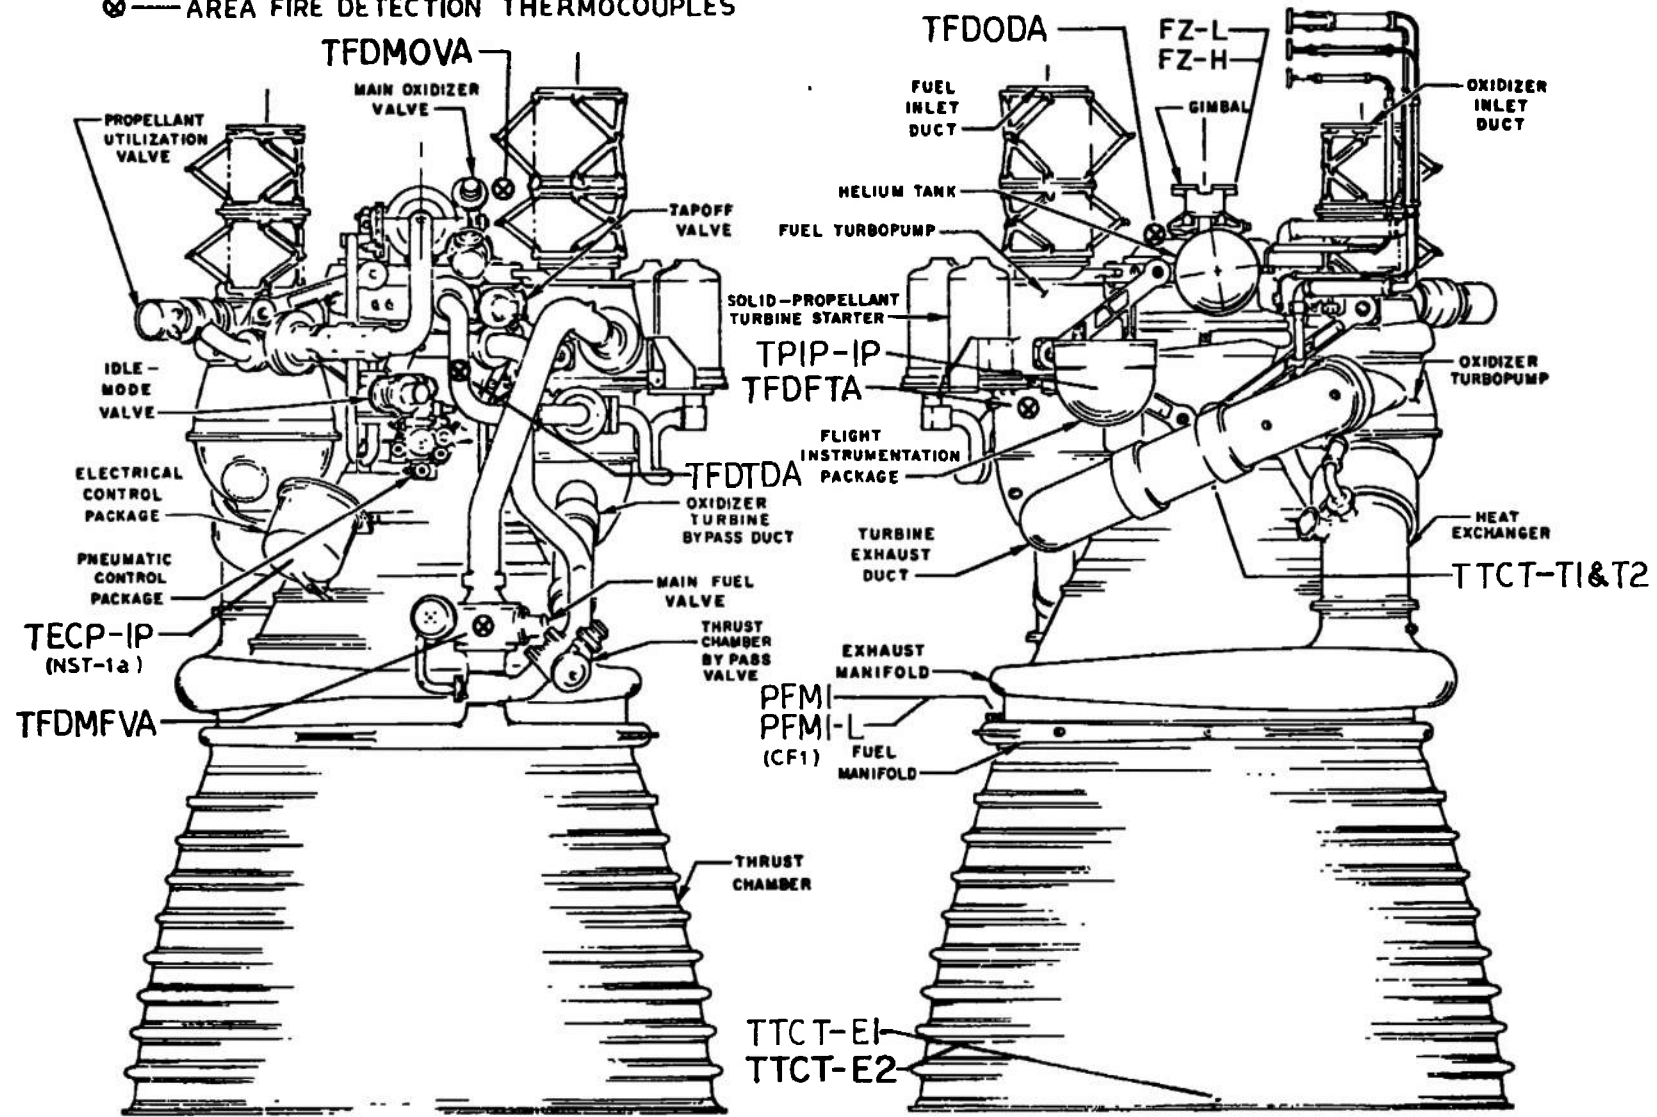


a. General Arrangement  
 Fig. III-1 Selected Sensor Locations

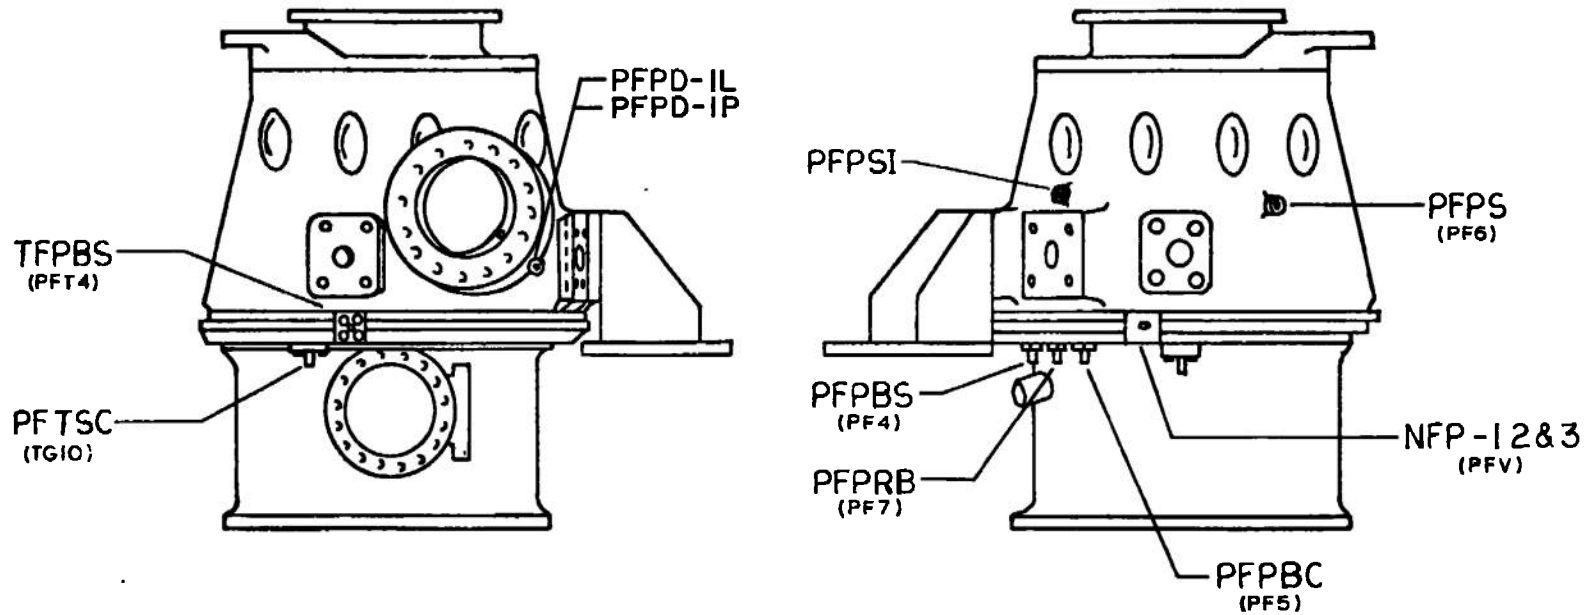


b. Fuel Turbopump Sensor Locations  
 Fig. III-1 Continued




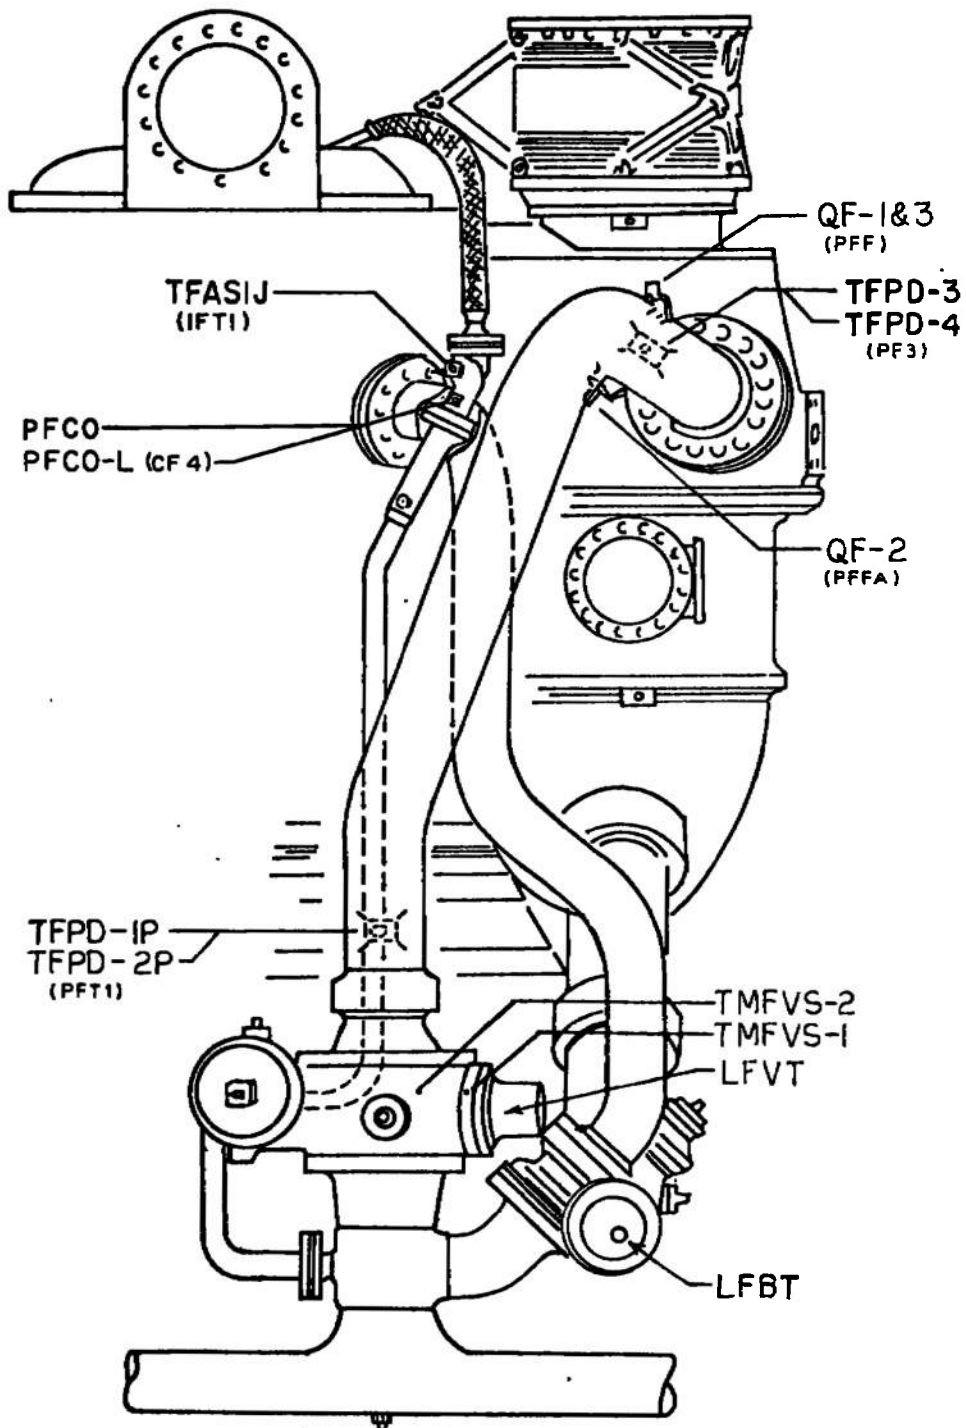


c. Fuel System Sensor Locations  
 Fig. III-1 Continued

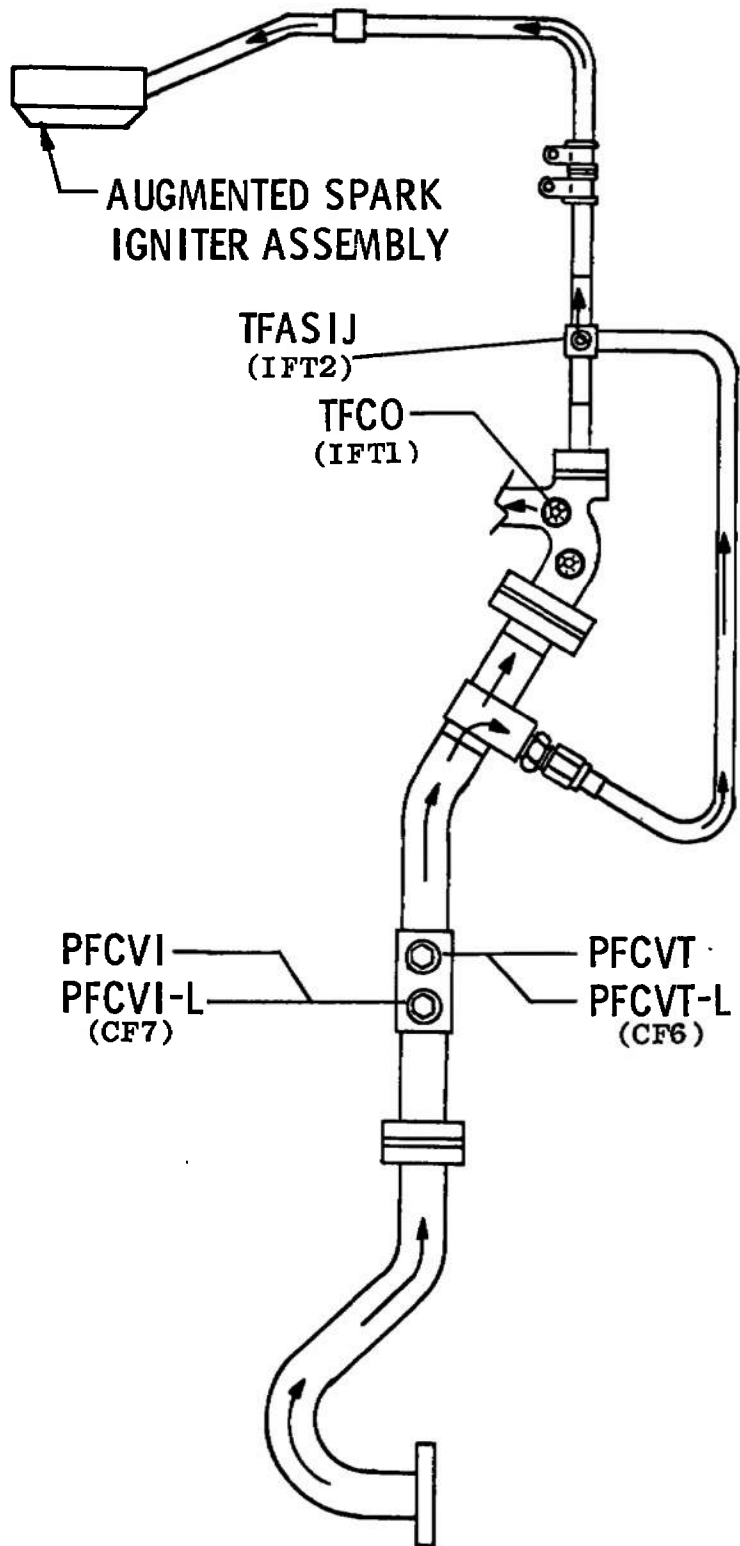


d. Fuel Film Coolant and Augmented Spark Igniter Supply Line Sensor Locations  
Fig. III-1 Continued

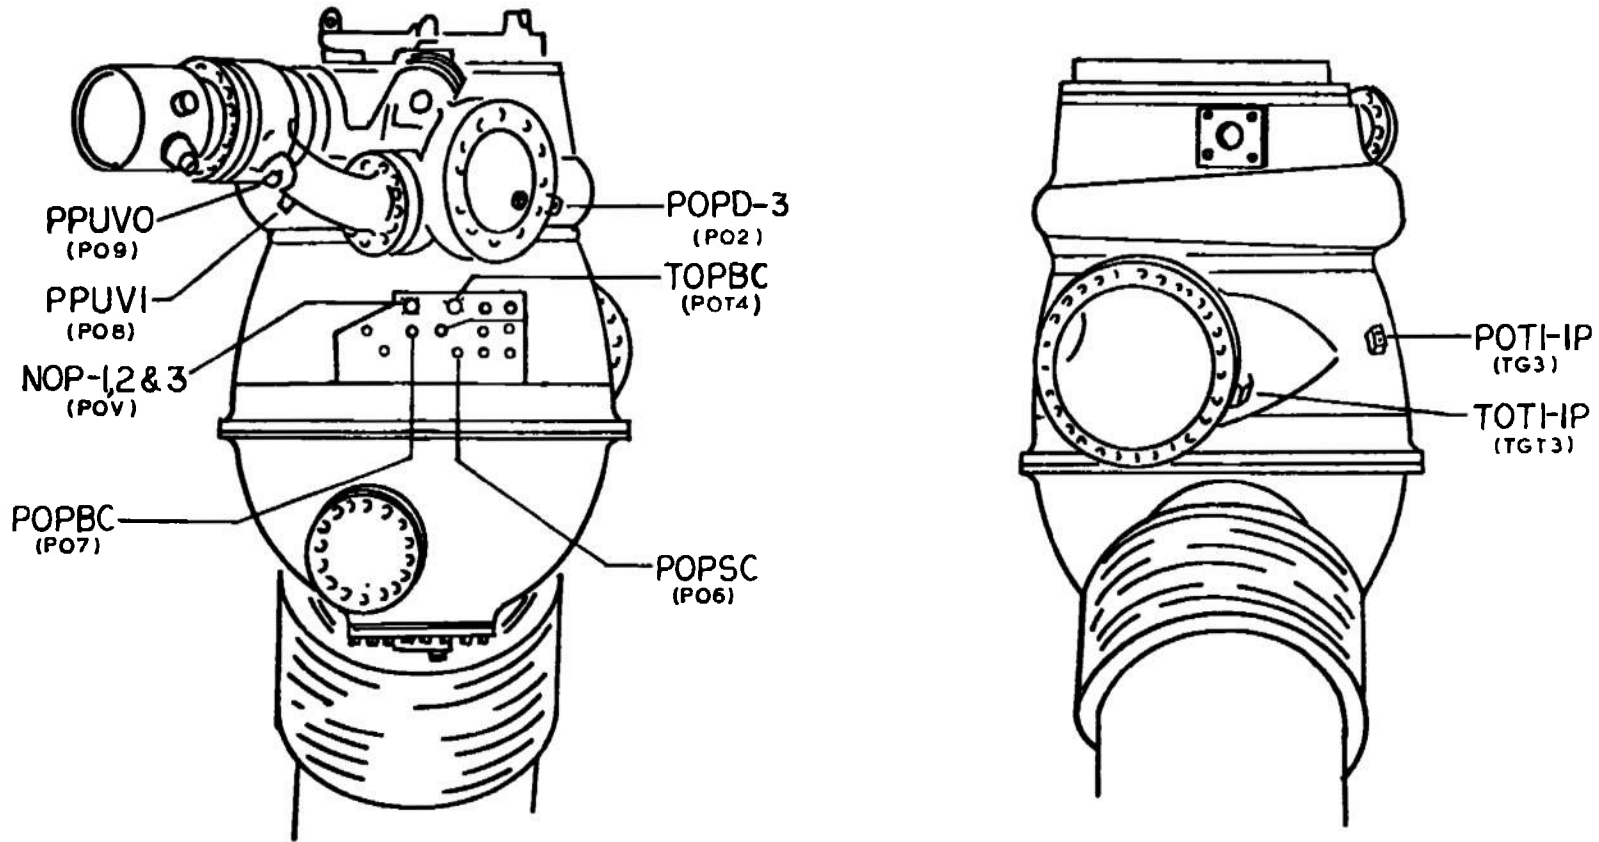



e. Oxidizer Turbopump Sensor Locations  
Fig. III-1 Continued

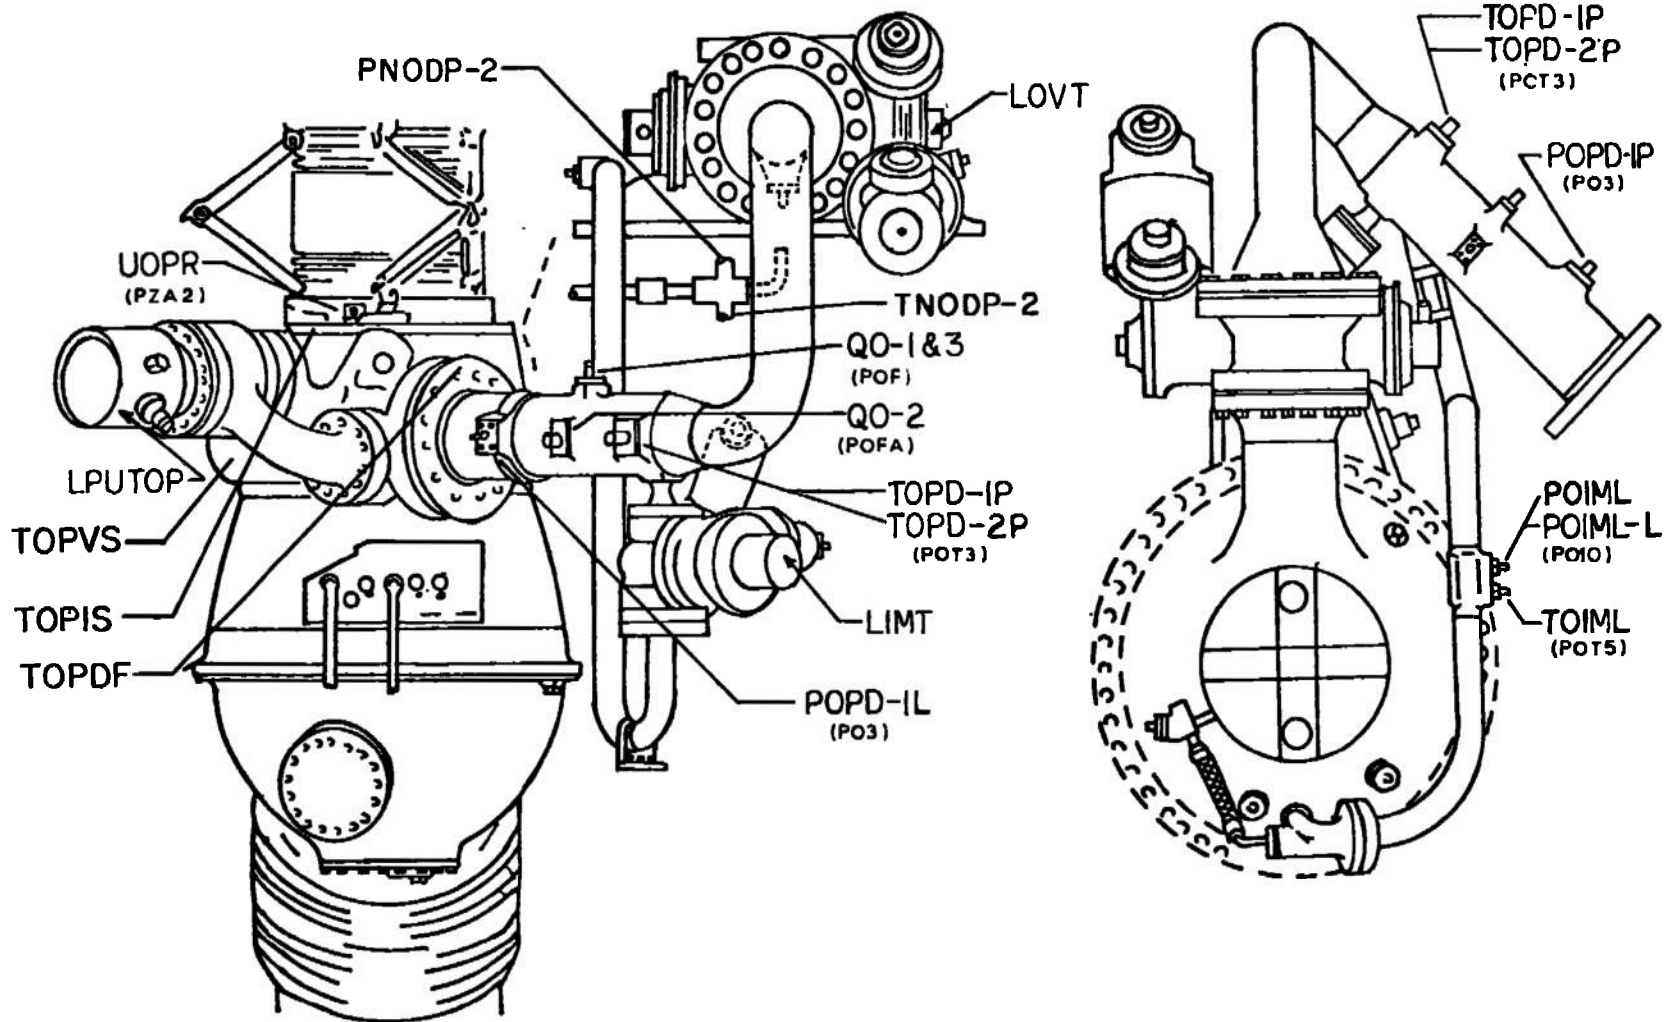


f. Oxidizer System Sensor Locations  
Fig. III-1 Continued

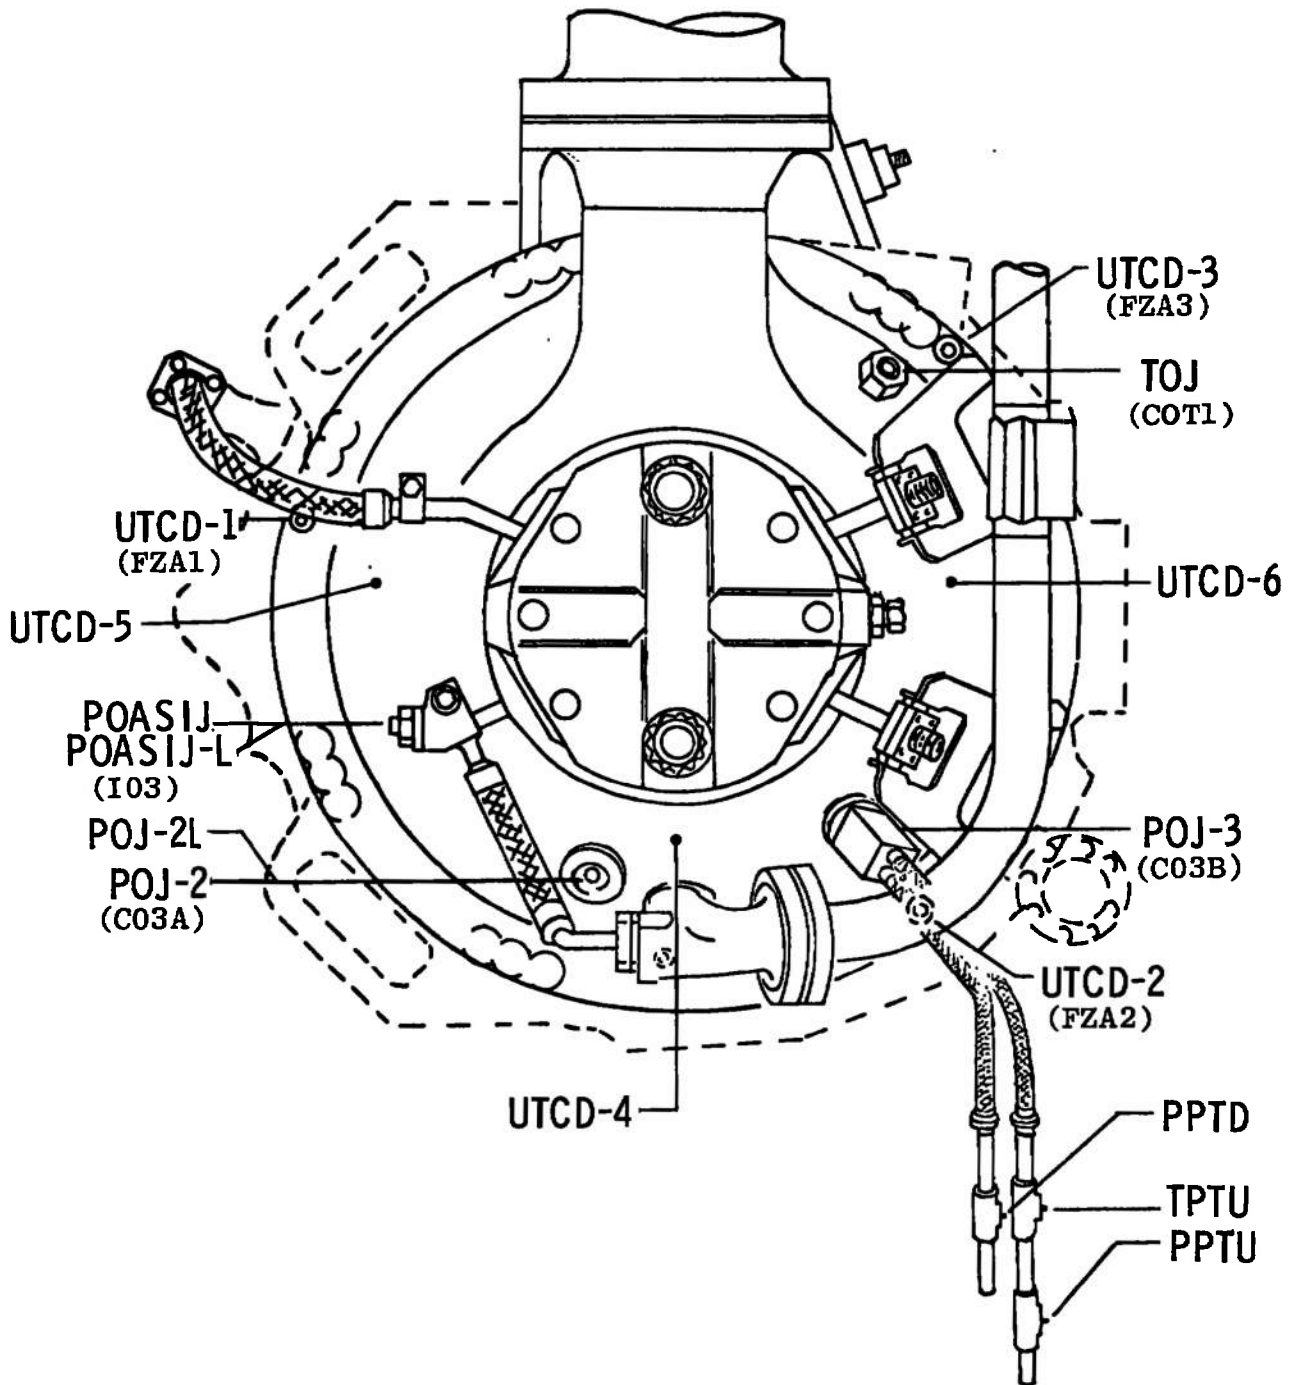


g. Thrust Chamber Injector Sensor Locations  
 Fig. III-1 Continued

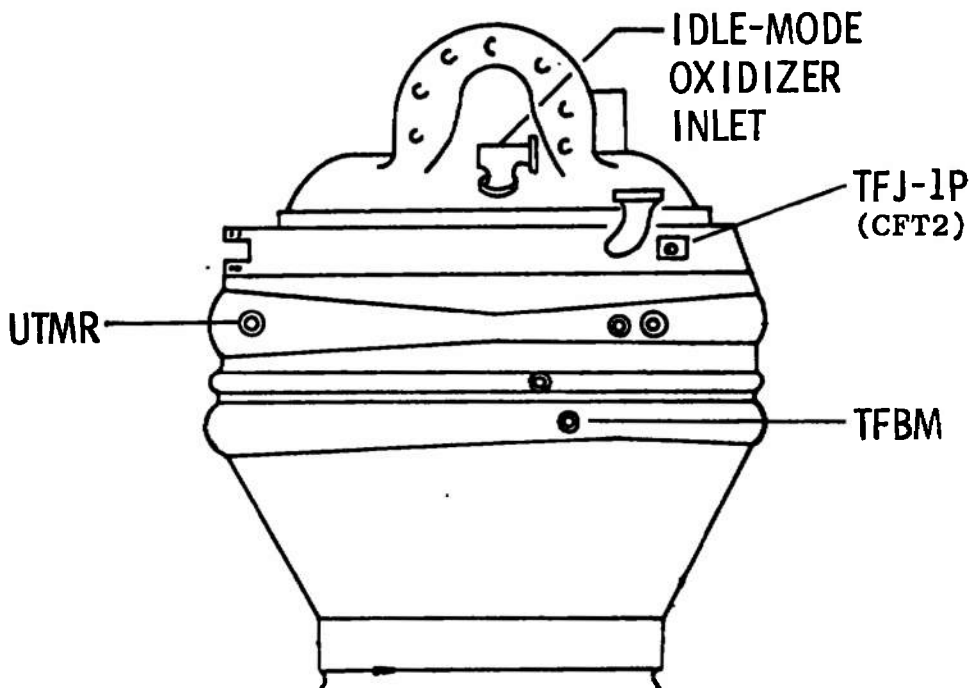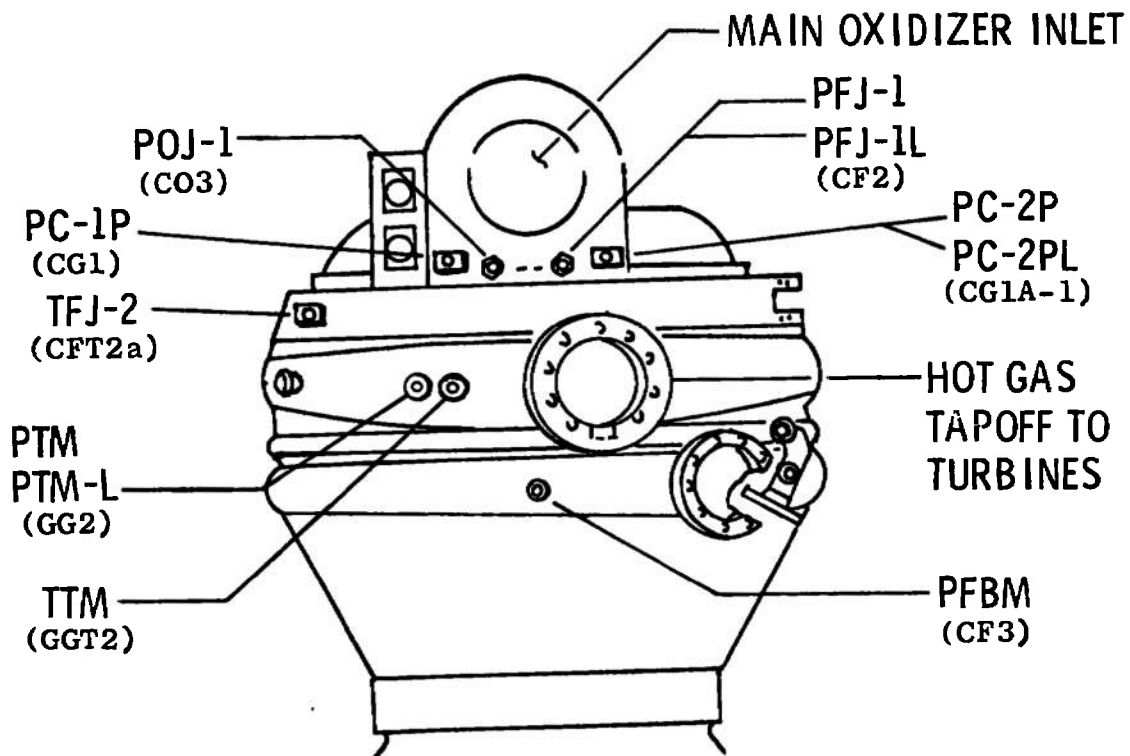

**h. Thrust Chamber Sensor Locations**  
**Fig. III-1 Continued**

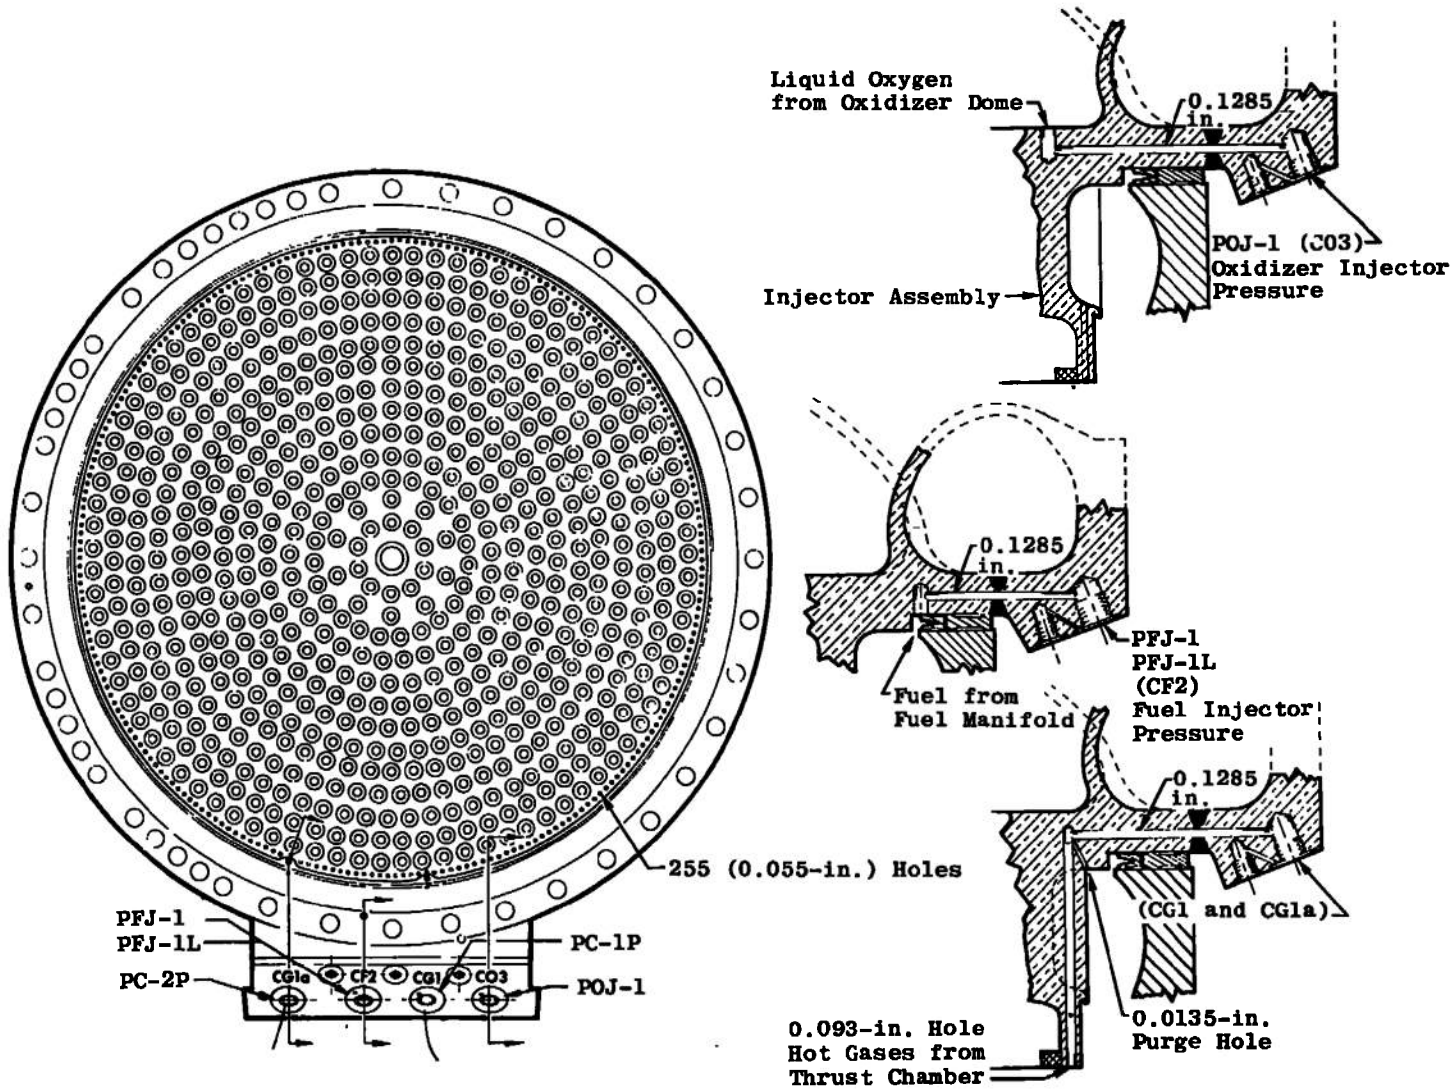


i. Thrust Chamber Injector Sensor Locations  
Fig. III-1 Continued

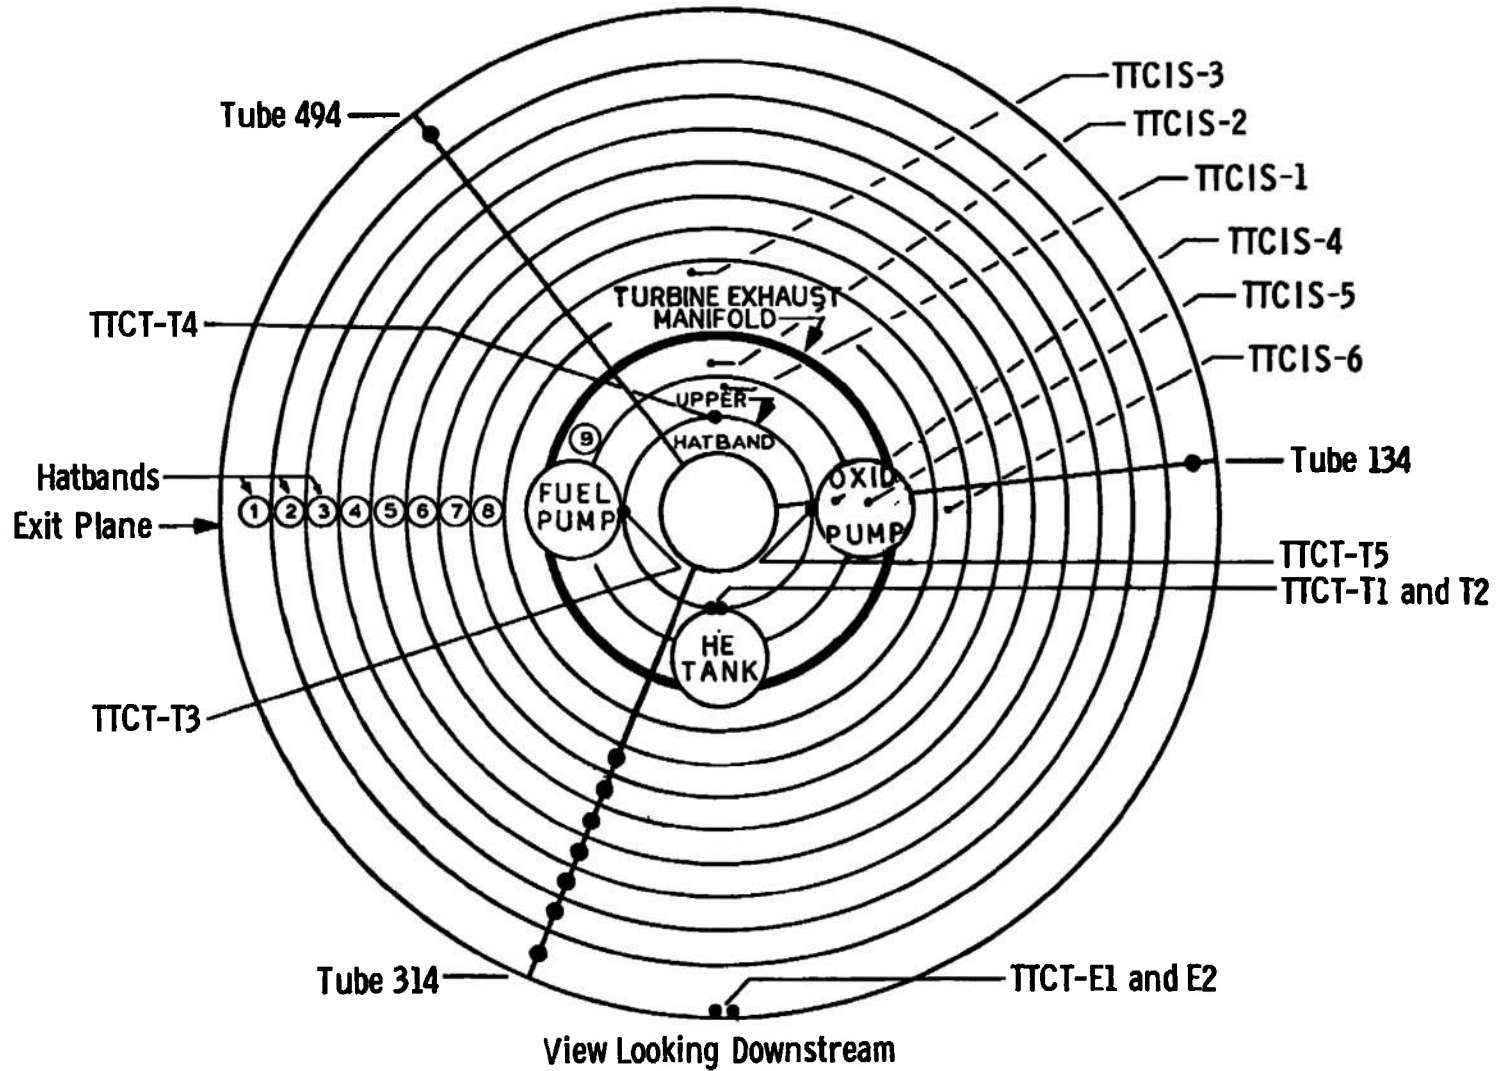



90

j. Thrust Chamber Sensor Locations




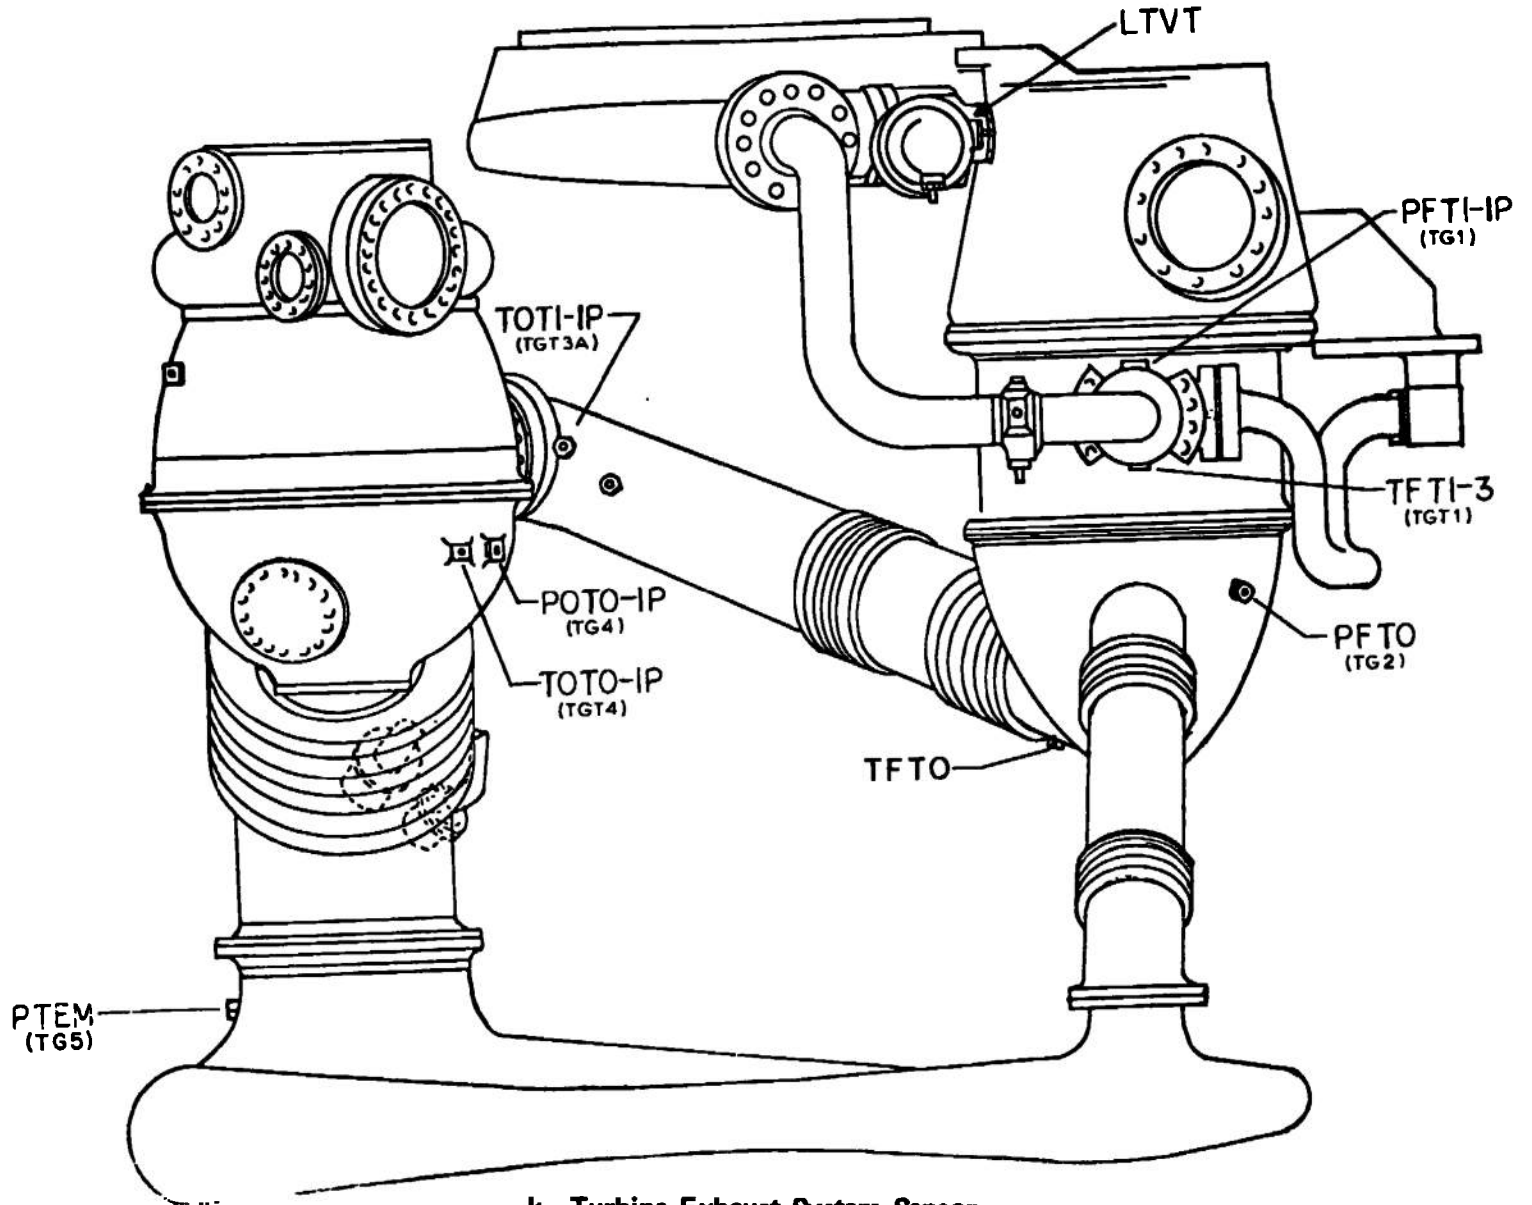


k. Turbine Exhaust System Sensor  
Fig. III-1 Continued

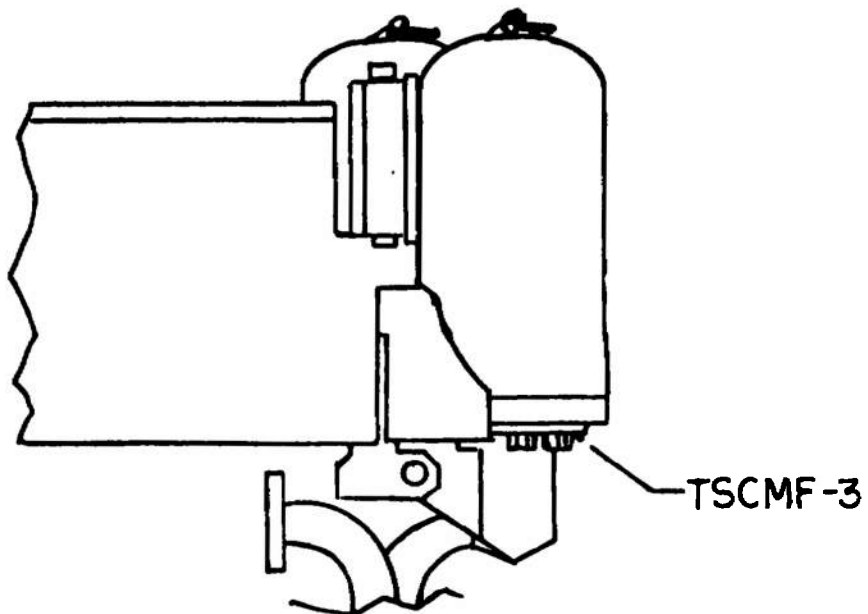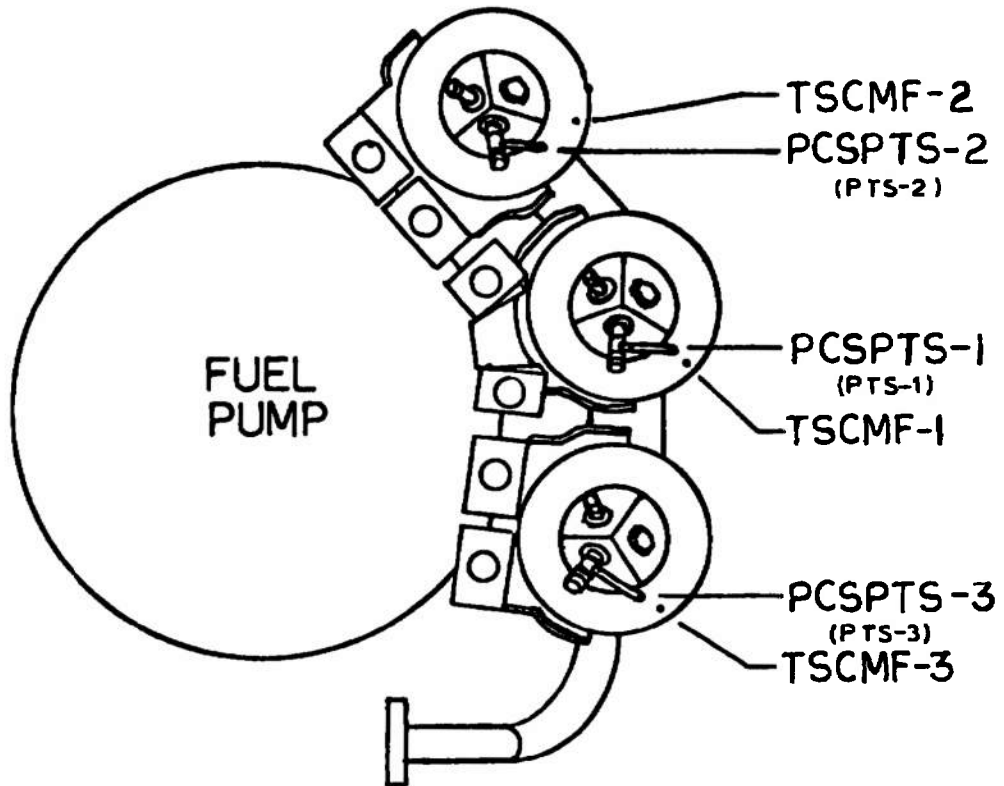


I. Solid-Propellant Turbine Starter Sensor Locations  
Fig. III-1 Continued

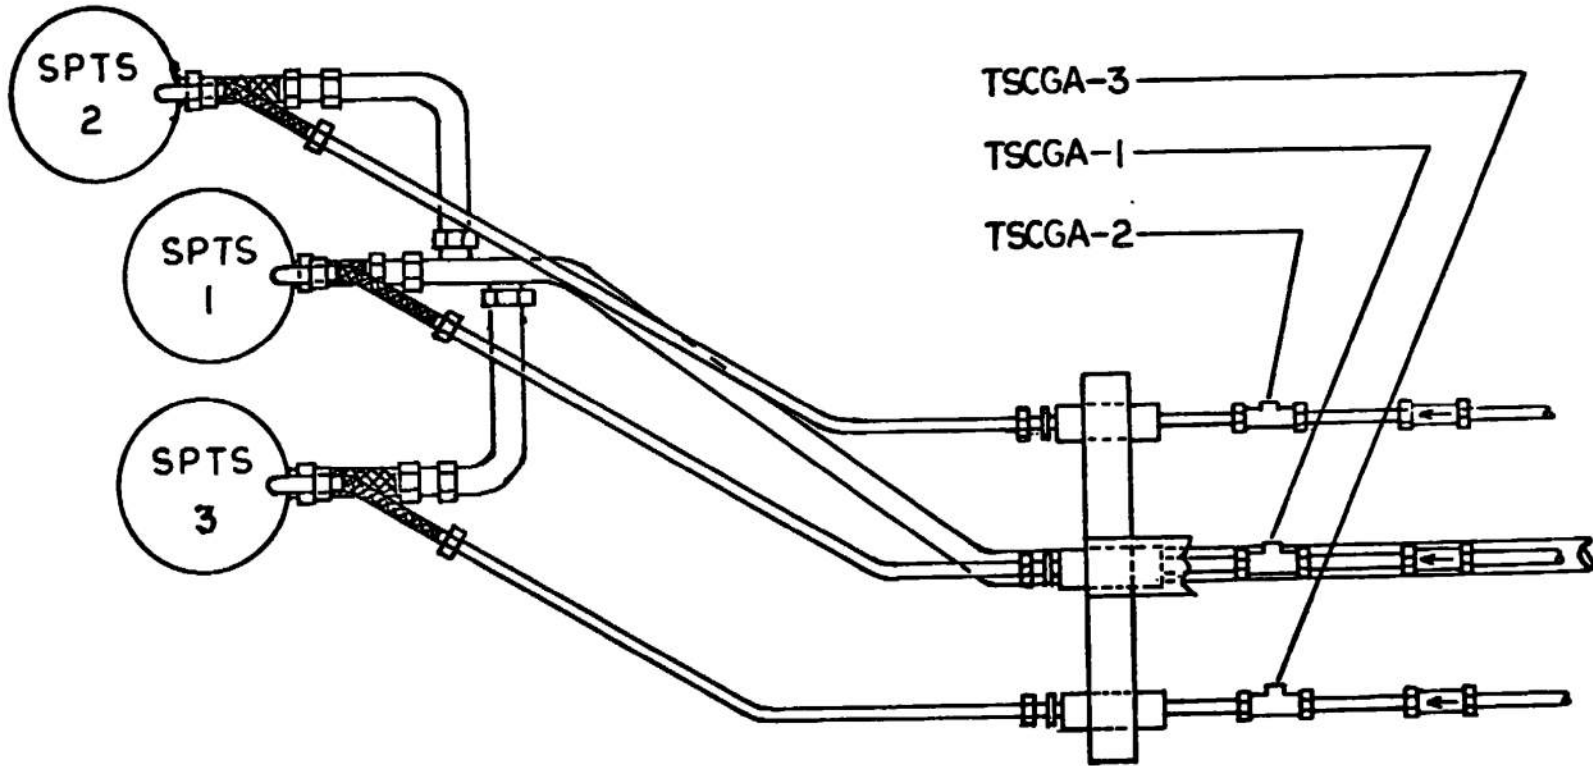


m. Solid-Propellant Turbine Starter Conditioning System Sensor Locations  
Fig. III-1 Continued

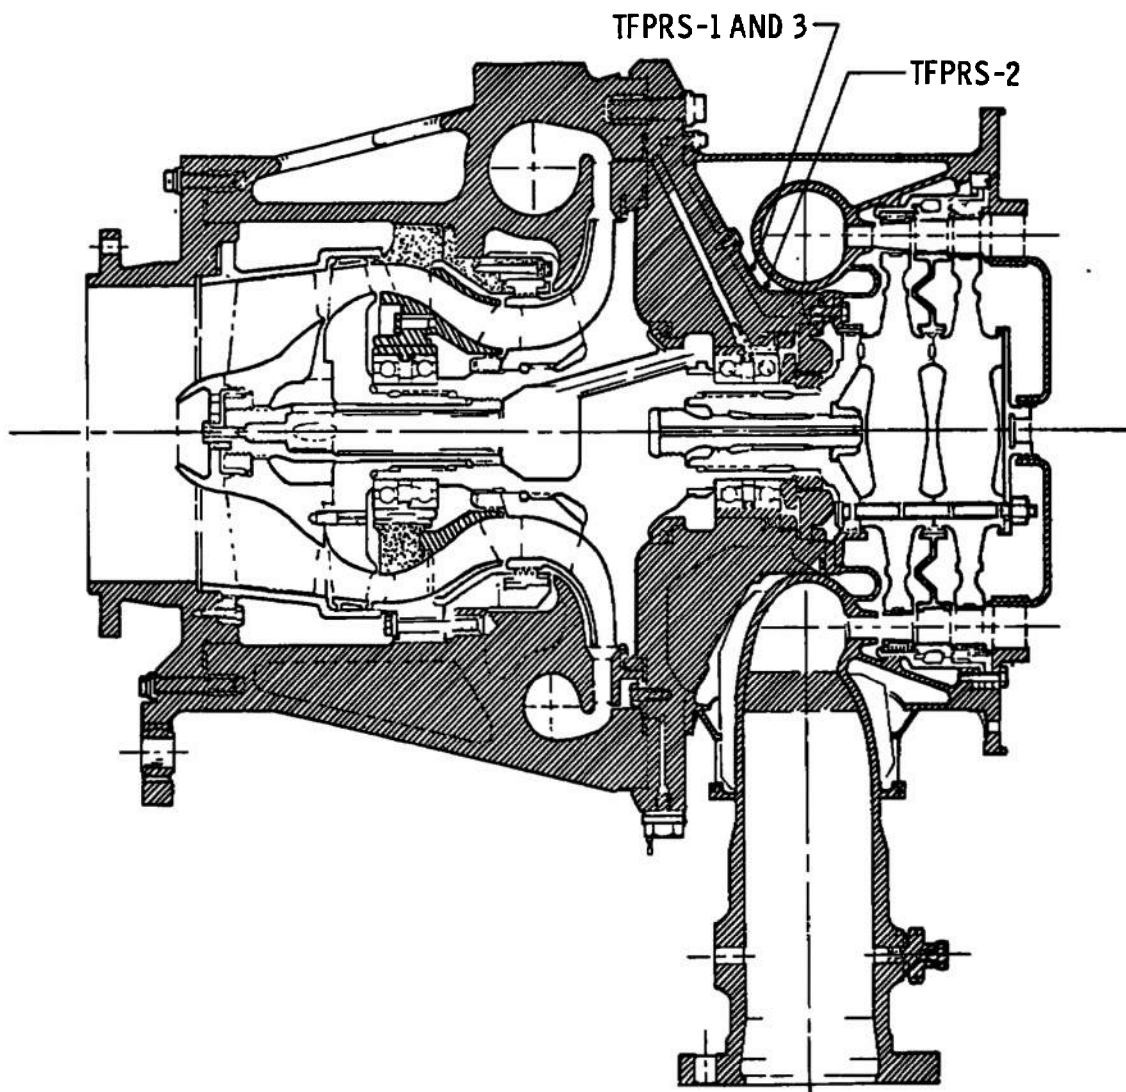


n. Fuel Turbine Sensor Locations  
Fig. III-1 Continued

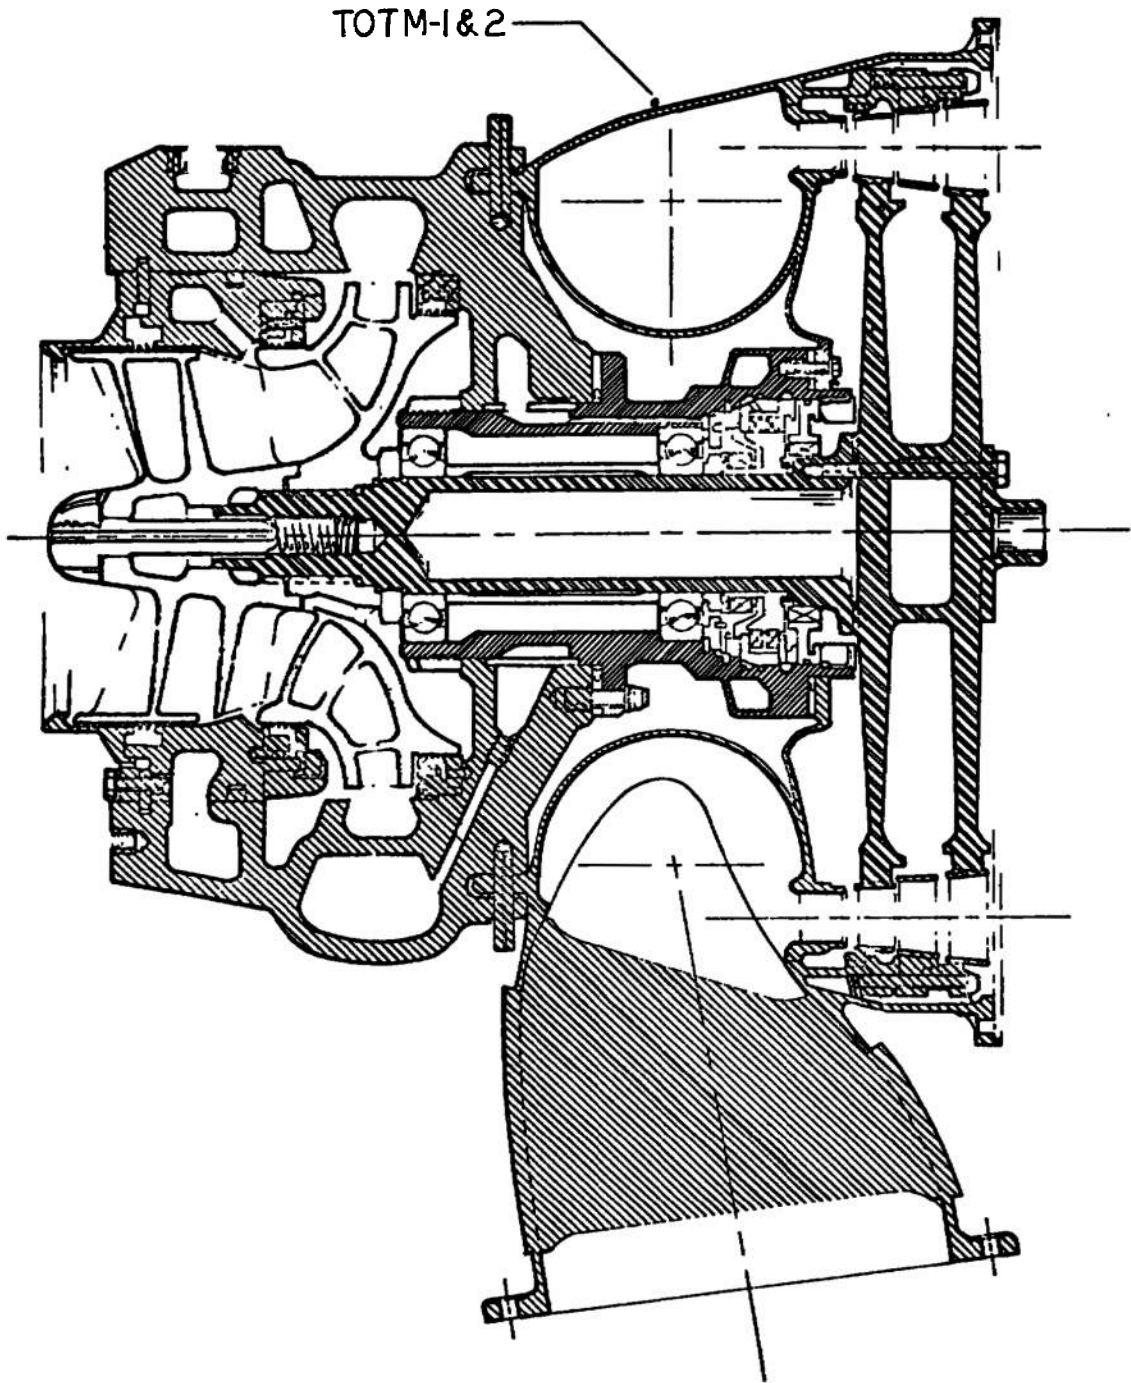


**o. Oxidizer Turbine Sensor Locations**  
**Fig. III-1 Continued**

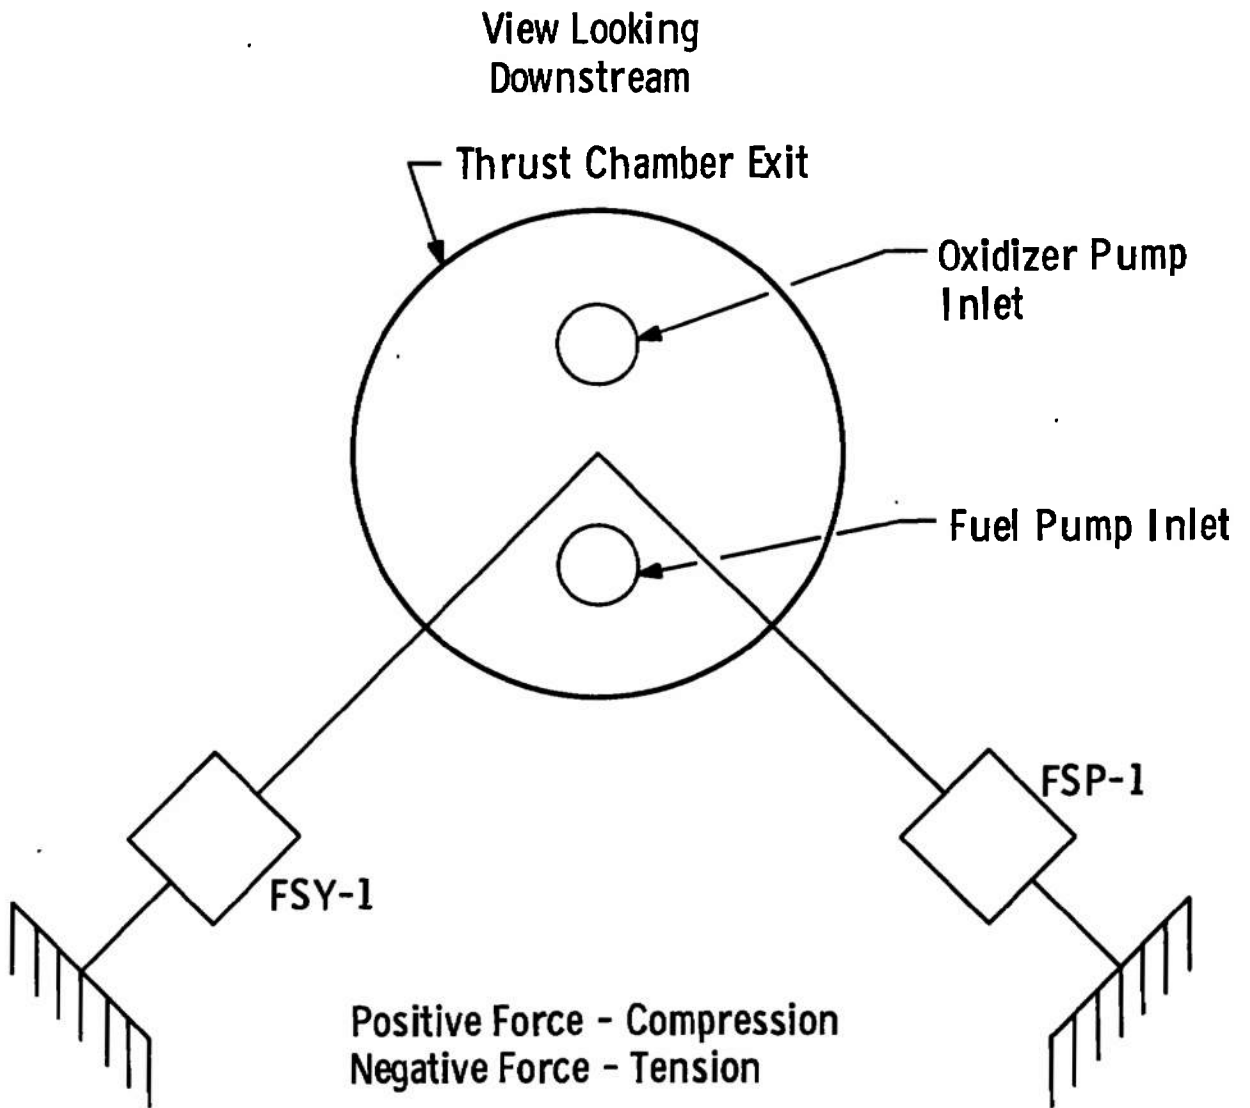

p. Side Load Forces Sensor Locations  
Fig. III-1 Continued

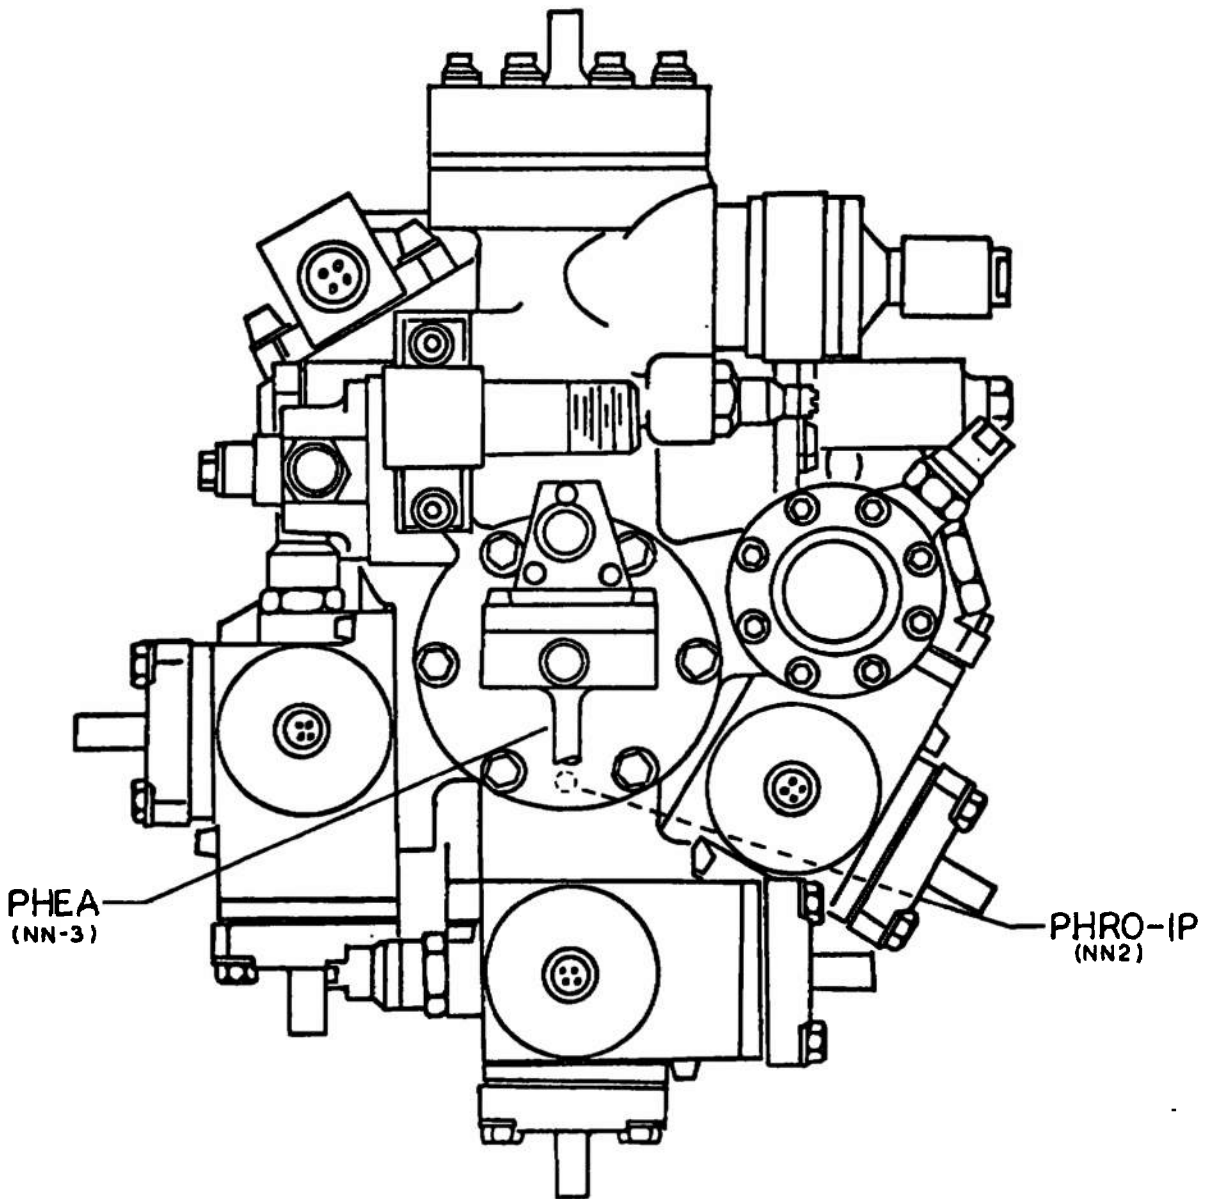


q. Pneumatic Control Package Sensor Locations  
Fig. III-1 Continued

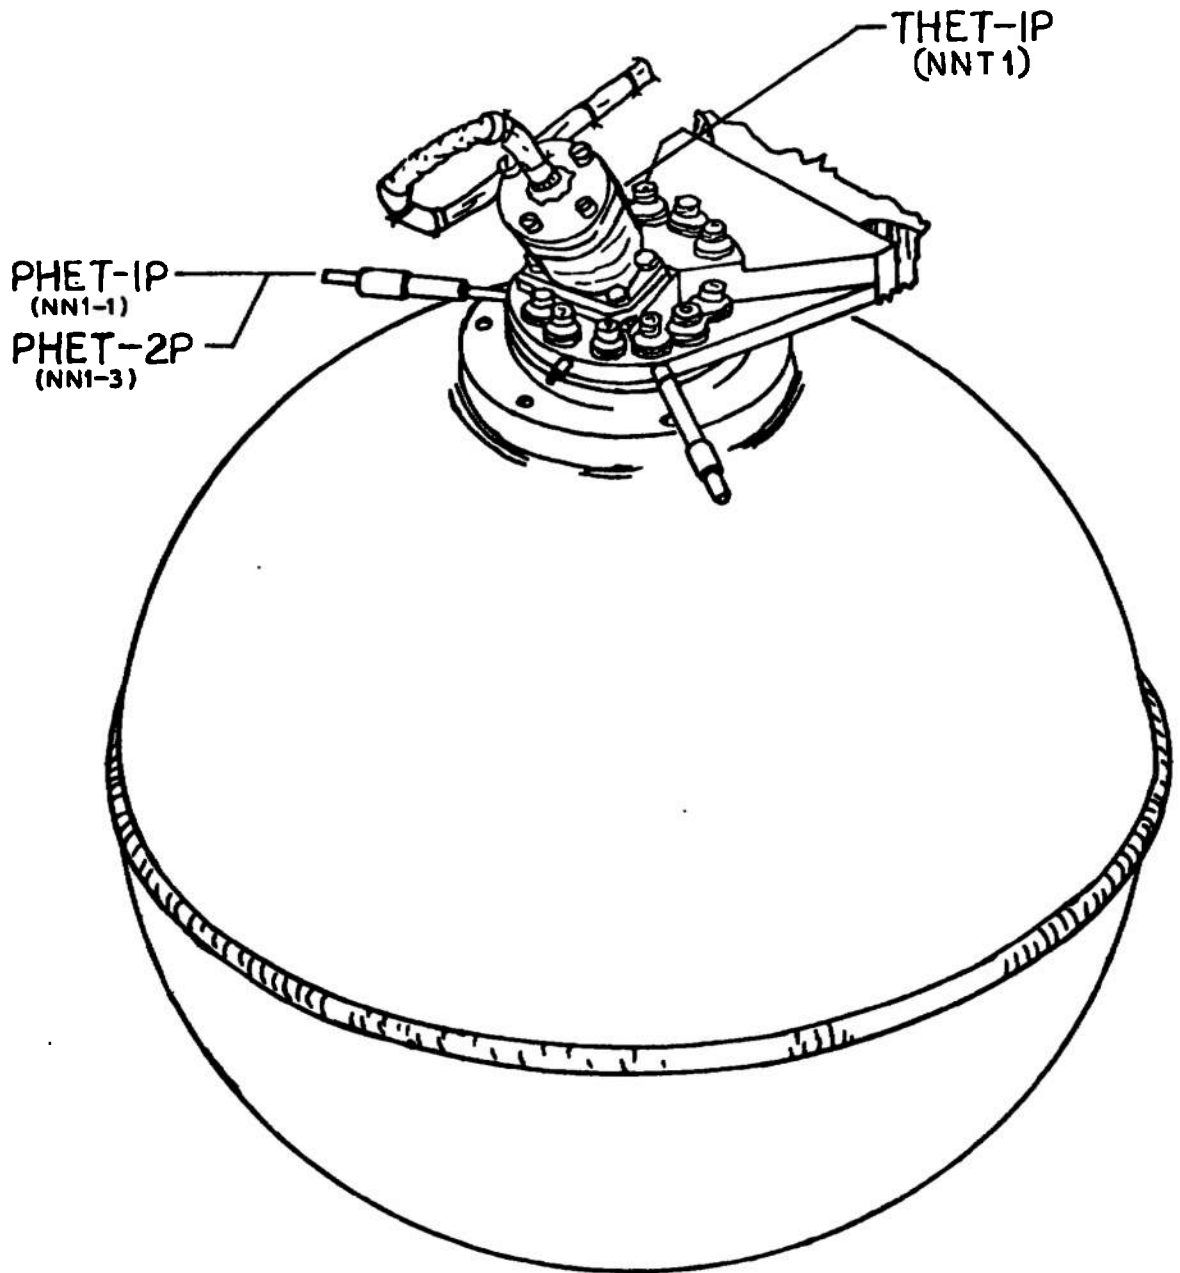


r. Helium Tank Sensor Locations  
Fig. III-1 Continued




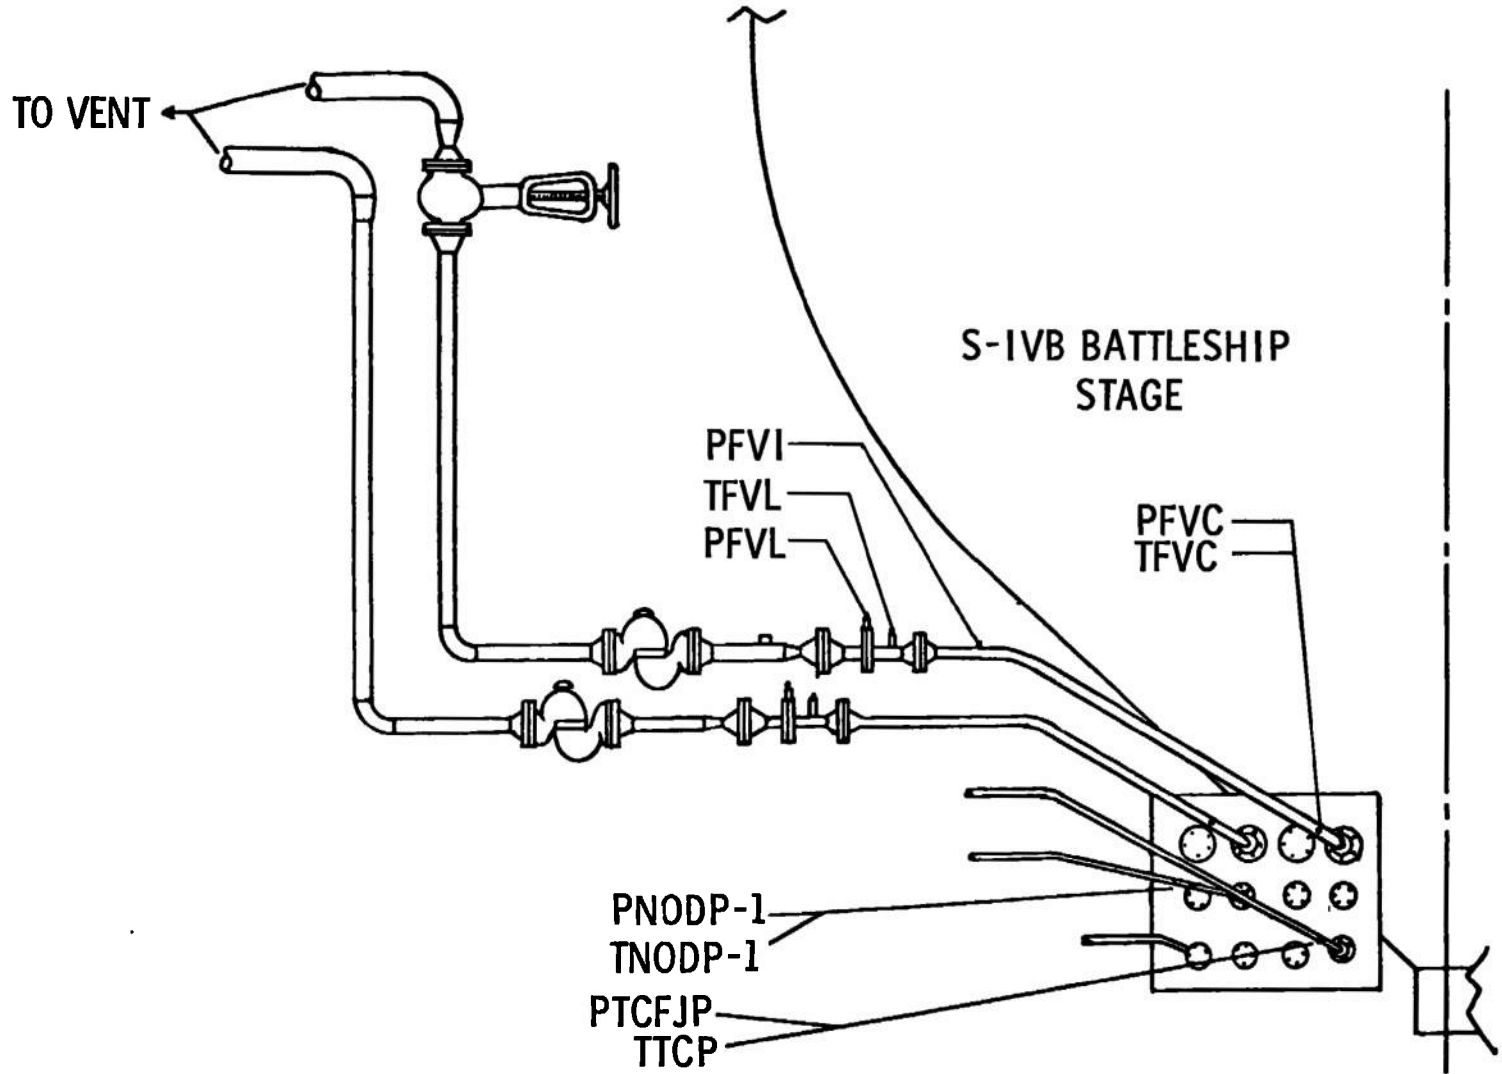

s. Customer Connect Panel Sensor Locations  
Fig. III-1 Continued

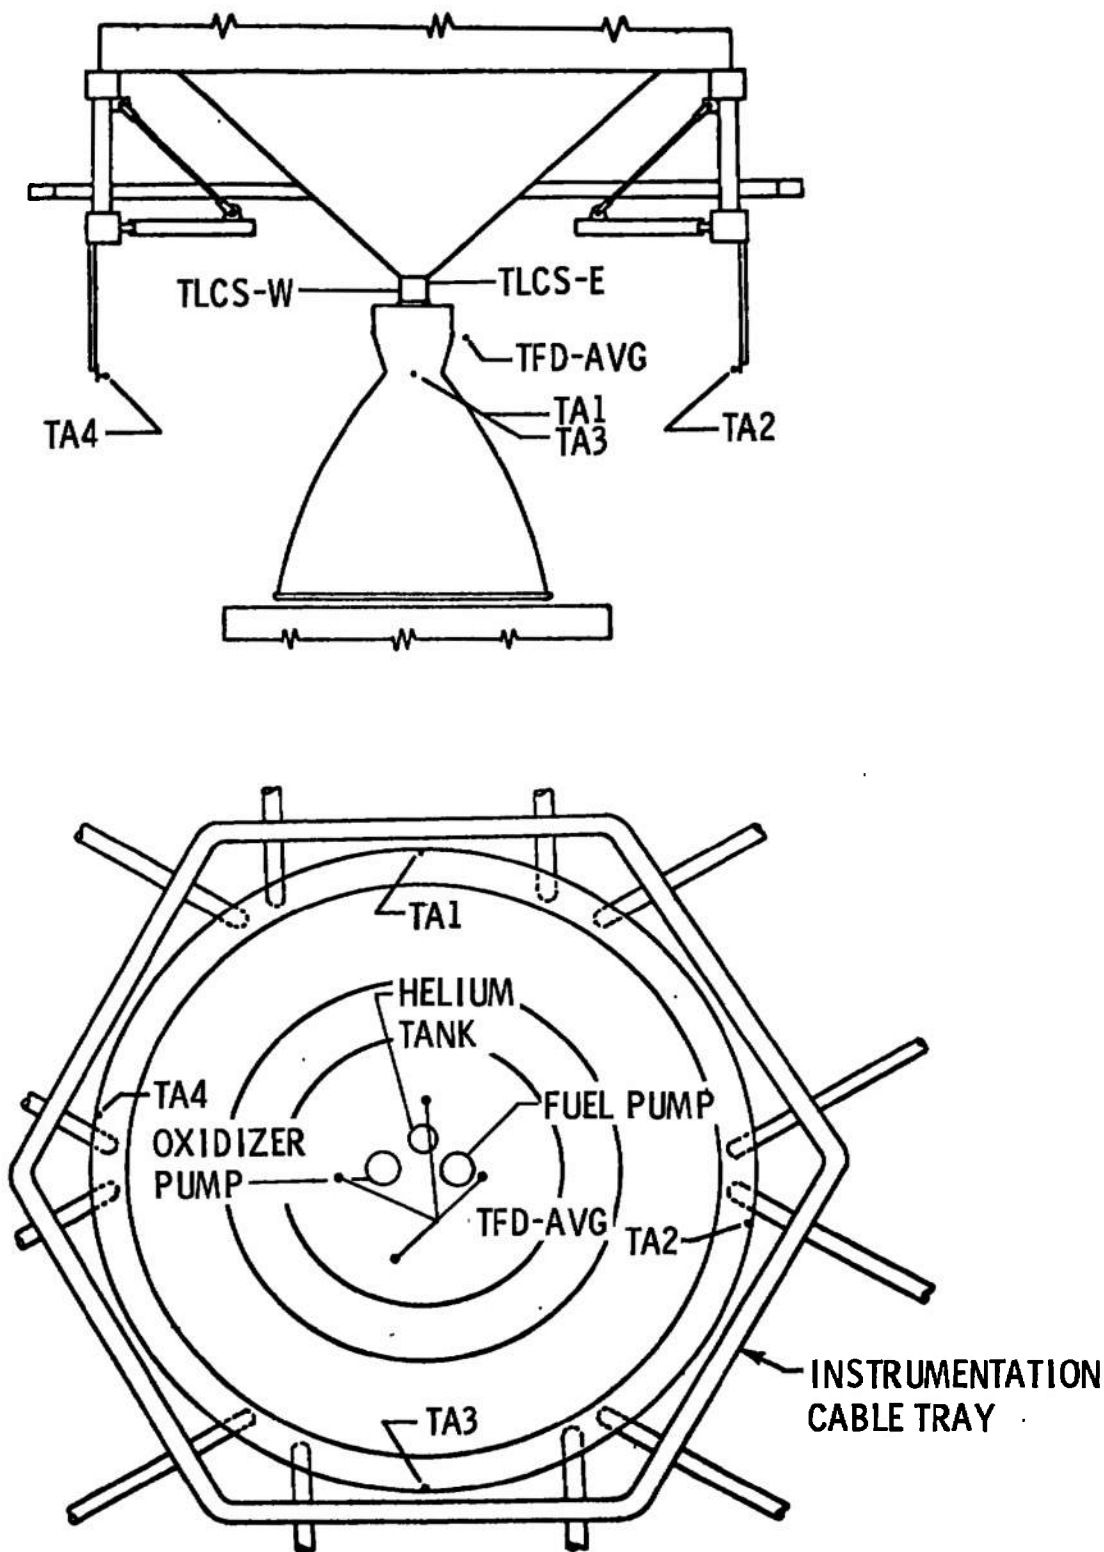

t. Test Cell Ambient Temperature Sensor Locations  
Fig. III-1 Continued

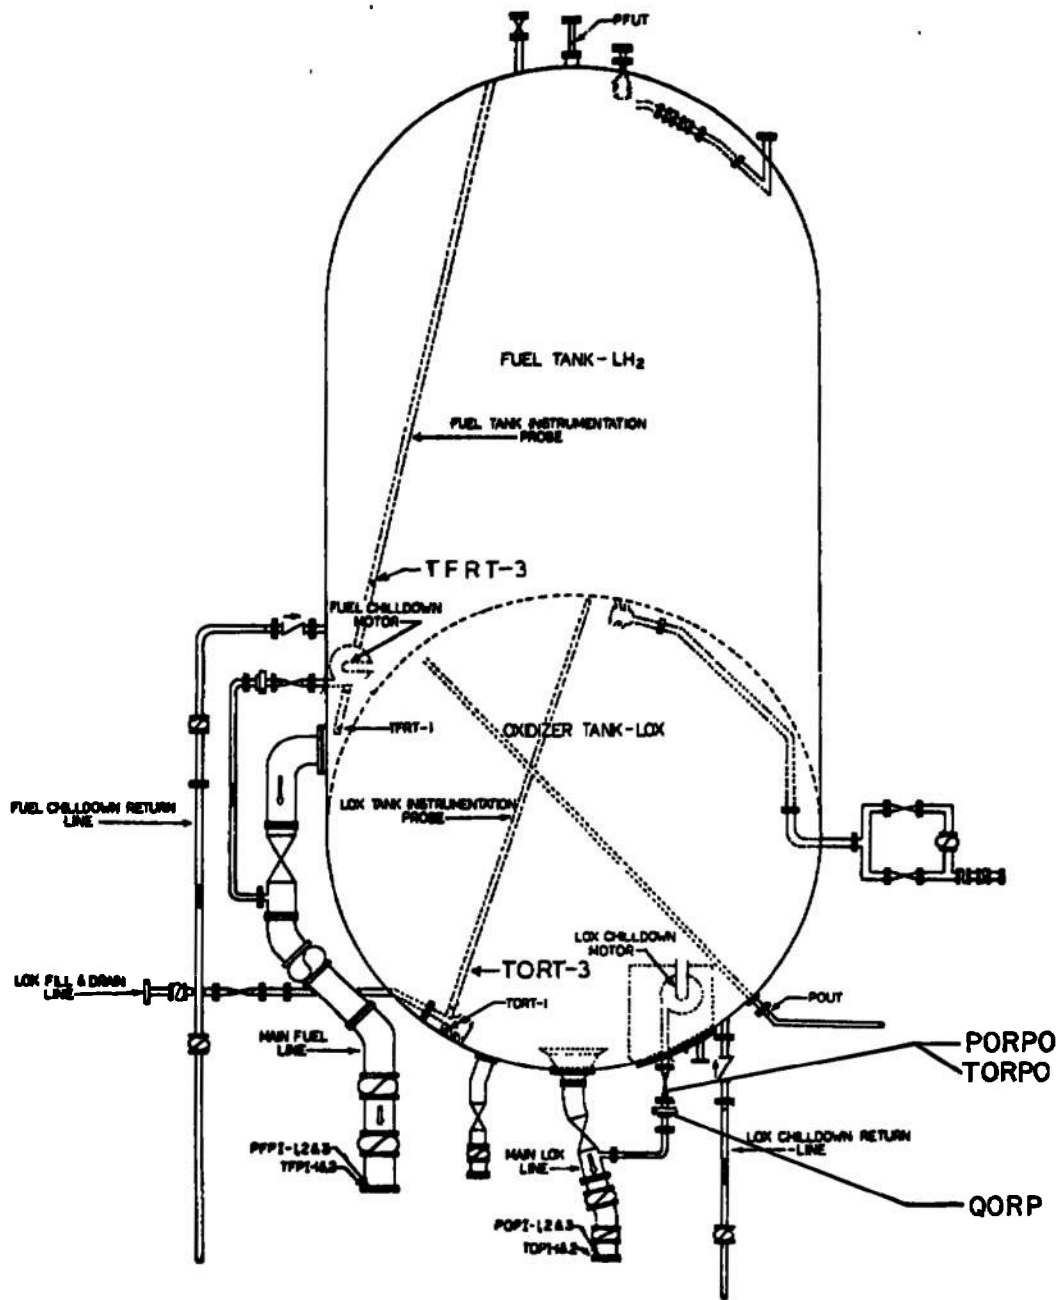

u. S-IVB Battleship Sensor Locations  
Fig. III-1 Concluded

**TABLE III-1  
INSTRUMENTATION LIST**

<u>AEDC Code</u>	<u>Parameter</u>	<u>Tap Number</u>	<u>Range</u>	<u>Digital Data System</u>	<u>Magnetic Tape</u>	<u>Oscillograph</u>	<u>Strip Chart</u>	<u>Event Recorder</u>	<u>X-Y Plotter</u>
<u>Current, amp</u>									
IIC	Control		0 to 30	x					
IIC	Ignition		0 to 30	x					
<u>Event</u>									
EASIS-1	Augmented Spark Igniter Spark -1		On/Off					x	
EASIS-2	Augmented Spark Igniter Spark -2		On/Off					x	
EECL	Engine Cutoff Lockin		On/Off	x		x		x	
EECO	Engine Cutoff Signal		On/Off	x		x		x	
EEER	Engine Ready Signal		On/Off					x	
EEES	Engine Start Command		On/Off	x		x		x	
EEESCO	Programmed Duration Cutoff		On/Off					x	
EEFPCO	Fuel Pump Overspeed Cutoff		On/Off					x	
EEFVVC	Fuel Prevalve Closed Limit		On/Off	x				x	
EEFVVO	Fuel Prevalve Open Limit		On/Off	x				x	
EEFUA	Exploding Bridgewire Firing Units Armed		On/Off					x	
EEHCS	Helium Control Solenoid Energized		On/Off	x	x	x		x	
EEHGTC	Hot Gas Tapoff Valve Closed Limit		On/Off					x	
EEHGTO	Hot Gas Tapoff Valve Open Limit		On/Off					x	
EEID	Ignition Detected		On/Off	x		x		x	
EEIDA-1	Ignition Detect Amplifier -1		On/Off					x	
EEIDA-2	Ignition Detect Amplifier -2		On/Off					x	
EEINCS	Idle-Mode Control Solenoid Energized		On/Off	x		x		x	
EEIHVC	Idle-Mode Valve Closed Limit		On/Off					x	
EEIHVO	Idle-Mode Valve Open Limit		On/Off					x	
EEINCL	Main-Stage Cutoff Lockin		On/Off	x		x		x	
EEINCO	Main-Stage Cutoff Signal		On/Off	x		x			
EEINCS	Main-Stage Control Solenoid Energized		On/Off	x		x		x	
EEIND-1	Main-Stage "OK" Depressurized -1		On/Off	x		x		x	
EEIND-2	Main-Stage "OK" Depressurized -2		On/Off	x		x		x	
EEINFVC	Main Fuel Valve Closed Limit		On/Off					x	
EEINFVO	Main Fuel Valve Open Limit		On/Off					x	
EEINOVC	Main Oxidizer Valve Closed Limit		On/Off					x	
EEINOVO	Main Oxidizer Valve Open Limit		On/Off					x	
EEINP-1	Main-Stage "OK" Pressurized -1		On/Off	x		x		x	
EEINP-2	Main-Stage "OK" Pressurized -2		On/Off	x				x	
EEINPCO	Main-Stage Pressure Cutoff Signal		On/Off					x	
EEINS	Main-Stage Start Signal		On/Off					x	
EEINSCO	Main-Stage Programmed Duration Cutoff		On/Off					x	
EEINSS	Main-Stage Start Solenoid Energized		On/Off	x	x	x		x	

TABLE III-1 (Continued)

AEDC Code	Parameter	Tap Number	Range	Digital Data System	Magnetic Tape	Oscillograph	Strip Chart	Event Recorder	X-Y Plotter
	<u>Event</u>								
E0CO	Observer Cutoff Signal		On/Off					x	
E0PCO	Oxidizer Pump Overspeed Cutoff Signal		On/Off					x	
E0PVC	Oxidizer Prevalve Closed Limit		On/Off	x				x	
E0PVO	Oxidizer Prevalve Open Limit		On/Off	x				x	
E0TCO	Fuel Turbine Over-Temperature Cutoff		On/Off					x	
ERASIS-1	Augmented Spark Igniter Spark Rate -1		On/Off			x			
ERASIS-2	Augmented Spark Igniter Spark Rate -2		On/Off			x			
ES1M1	No. 1 Solid-Propellant Turbine Starter Exploding Bridge Wire Monitor 1		On/Off	x		x			
ES1M2	No. 1 Solid-Propellant Turbine Starter Exploding Bridge Wire Monitor 2		On/Off	x		x			
ES2M1	No. 2 Solid-Propellant Turbine Starter Exploding Bridge Wire Monitor 1		On/Off	x		x			
ES2M2	No. 2 Solid-Propellant Turbine Starter Exploding Bridge Wire Monitor 2		On/Off	x		x			
ES3M1	No. 3 Solid-Propellant Turbine Starter Exploding Bridge Wire Monitor 1		On/Off	x		x			
ES3M2	No. 3 Solid-Propellant Turbine Starter Exploding Bridge Wire Monitor 2		On/Off	x		x			
ESAMCO	Stall Approach Monitor Cutoff		On/Off					x	
ESPTS	Solid-Propellant Turbine Starter Initiated		On/Off					x	
ESR-1	Solid-Propellant Turbine Starter 1 Ready		On/Off	x		x		x	
ESR-2	Solid-Propellant Turbine Starter 2 Ready		On/Off	x		x		x	
ESR-3	Solid-Propellant Turbine Starter 3 Ready		On/Off	x		x		x	
ESTCO	Start "OK" Timer Cutoff Signal		On/Off					x	
ETCBC	Thrust Chamber Bypass Valve Closed		On/Off					x	
ETCBO	Thrust Chamber Bypass Valve Open		On/Off					x	
EVSC-1	Vibration Safety Counts -1		On/Off			x			
EVSC-2	Vibration Safety Counts -2		On/Off			x			
EVSC-3	Vibration Safety Counts -3		On/Off			x			
	<u>Flows, gpm</u>								
QF-1	Engine Fuel	PFF	0 to 11,000	x					
QF-2	Engine Fuel	PFFa	0 to 11,000	x	x	x			x
QF-3	Engine Fuel	PFF	0 to 11,000			x			
QF-18AN <sup>(3)</sup>	Stall Approach Monitor		0 to 370	x		x			
QO-1	Engine Oxidizer	POP	0 to 3,600	x					
QO-2	Engine Oxidizer	POPa	0 to 3,600	x	x	x			
QO-3	Engine Oxidizer	POP	0 to 3,600			x			
QORP <sup>(1)</sup>	Oxidizer Recirculation System		0 to 50	x	x	x			

TABLE III-1 (Continued)

<u>AEDC Code</u>	<u>Parameter</u>	<u>Tap Number</u>	<u>Range</u>	<u>Digital Data System</u>	<u>Magnetic Tape</u>	<u>Oscillo-graph</u>	<u>Strip Chart</u>	<u>Event Recorder</u>	<u>X-Y Plotter</u>
<u>Force, lbf</u>									
FSP-1	Side Load (Pitch)		+20,000	x	x	x			
FYS-1	Side Load (Yaw)		+20,000	x	x	x			
FS-H	Axial Thrust		0 to 300,000	x	x	x			
FS-L	Axial Thrust		+10,000	x	x	x			
<u>Position, Percent Open</u>									
LFBT	Thrust Chamber Bypass Valve		0 to 100	x		x			
LPVT	Main Fuel Valve		0 to 100	x		x			
LINT	Idle Mode/Augmented Spark Igniter Oxidiser Valve		0 to 100	x		x			
LOVY	Main-Oxidiser Valve		0 to 100	x		x			
LPUTOP	Propellant Utilisation Valve		5 volts	x		x	x		
LTVT	Hot Gas Tapoff Valve		0 to 100	x		x			
<u>Pressure, psia</u>									
PA-1	Test Cell		0 to 0.5	x					
PA-2	Test Cell		0 to 1.0	x					
PA-3	Test Cell		0 to 5.0	x		x	x		
PC-1P	Thrust Chamber	CG1	0 to 1500	x					
PC-2P	Thrust Chamber	CG1e	0 to 1500	x		x	x		
PC-2PL	Thrust Chamber	CG1e-1	0 to 50	x		x	x		
PCSPTS-1	Solid-Propellant Turbine Starter Chamber 1	PTS-1	0 to 5000	x		x			
PCSPTS-2	Solid-Propellant Turbine Starter Chamber 2	PTS-2	0 to 5000	x		x			
PCSPTS-3	Solid-Propellant Turbine Starter Chamber 3	PTS-3	0 to 5000	x		x			
PFBM	Thrust Chamber Bypass Manifold	CF3	0 to 1500	x					
PFCD	Film Coolant Orifice	CF4	0 to 2000	x					
PFCD-L	Film Coolant Orifice	CF4	0 to 50	x					
PFVVI	Film Coolant Venturi Inlet	CF7	0 to 2000	x					
PFVVI-L	Film Coolant Venturi Inlet	CF7	0 to 50	x					
PFVVT	Film Coolant Venturi Throat	CF6	0 to 2000	x					
PFVVT-L	Film Coolant Venturi Throat	CF6	0 to 50	x					
PFJ-1	Fuel Injection	CF2	0 to 1500	x		x			
PFJ-1L	Fuel Injection	CF2	0 to 50	x					
PFMI	Fuel Jacket Manifold Inlet	CF1	0 to 2000	x					
PFMI-L	Fuel Jacket Manifold Inlet	CF1	0 to 50						
PFPSB	Fuel Pump Balance Piston Cavity	PF5	0 to 2000	x		x	x		
PFPSB	Fuel Pump Balance Piston Sump	PF4	0 to 1000	x		x	x		
PFPD-1L	Fuel Pump Discharge	PF3	0 to 50	x					
PFPD-1P	Fuel Pump Discharge	PF3	0 to 2500	x	x	x	x <sup>(3)</sup>		x
PFPI-1	Fuel Pump Inlet	PF1	0 to 100	x			x <sup>(3)</sup>		x
PFPI-2	Fuel Pump Inlet		0 to 100	x					x
PFPI-3	Fuel Pump Inlet	PF1e	0 to 100	x	x	x			x
PFPRB	Fuel Pump Rear Bearing Coolant	PF7	0 to 1000	x					
PFPS	Fuel Pump Interstage	PF6	0 to 1000	x		x	x <sup>(3)</sup>		

TABLE III-1 (Continued)

AEDC Code	Parameter	Tap Number	Range	Digital Data System	Magnetic Tape	Oscillo-graph	Strip Chart	Event Recorder	X-Y Plotter
	<u>Pressure, psia</u>								
PFPSI	Fuel Pump Shroud Inlet		0 to 3500	x				x (3)	
PFTI-1P	Fuel Turbine Inlet	TG1	0 to 1000	x		x			
PFTO	Fuel Turbine Outlet	TG3	0 to 200	x					
PFTSC	Fuel Turbine Seal Cavity	TG10	0 to 500	x					
PFUT	Fuel Ullage Tank		0 to 100	x					
PFVC	Fuel Repressurization at Customer Connect Panel		0 to 2000	x					
PFVI	Fuel Repressurization Nozzle Inlet	KHF1	0 to 2000	x					
PFVL	Fuel Repressurization Nozzle Throat	KHF2	0 to 1000	x					
PHEA	Helium Accumulator	NN3	0 to 750	x					
PHECMO	Helium Control Module		0 to 750	x					
PRES	Helium Supply		0 to 5000	x					
PNET-1P	Helium Tank	NN1-1	0 to 5000	x					x
PNET-2P	Helium Tank	NN1-3	0 to 5000	x					
PRRO-1P	Helium Regulator Outlet	NN2	0 to 750	x					
PNODP-1	Oxidizer Dome Purge at Customer Connect Panel		0 to 750	x					
PNODP-2	Oxidizer Dome Purge at Customer Connect Panel		0 to 1500	x					
POASIJ	Augmented Spark Igniter Oxidizer Injection	IO3	0 to 1500	x		x			
POINL	Oxidizer Idle-Mode Line	PO10	0 to 2000		x				
POINL-L	Oxidizer Idle-Mode Line	PO10	0 to 50		x				
POJ-1	Oxidizer Injection	CO3	0 to 1500	x					
POJ-2	Oxidizer Injection	CO3a	0 to 1500	x			x		
POJ-2L	Oxidizer Injection	CO3a	0 to 50	x			x (6)		
POJ-3	Oxidizer Injection Manifold	CO3b	0 to 2000		x		x		
POPEC	Oxidizer Pump Bearing Coolant	PO7	0 to 500	x					
POPD-1L	Oxidizer Pump Discharge	PO3	0 to 50	x					
POPD-1P	Oxidizer Pump Discharge	PO3	0 to 2500	x					
POPD-2	Oxidizer Pump Discharge	PO2	0 to 3500	x	x		x		
POPI-1	Oxidizer Pump Inlet	PO1	0 to 100	x					x
POPI-2	Oxidizer Pump Inlet		0 to 100	x					x
POPI-3	Oxidizer Pump Inlet	PO1e	0 to 100	x	x		x		
POPEC	Oxidizer Pump Primary Seal Cavity	PO6	0 to 50	x					
PORPO, (1)	Oxidizer Recirculation Pump Outlet		0 to 100	x					
POTI-1P	Oxidizer Turbine Inlet	TG3	0 to 200	x					
POTO-1P	Oxidizer Turbine Outlet	TG4	0 to 100	x					
POUT	Oxidizer Ullage Tank		0 to 100	x					
PPTD	Photocell Cooling Water (Downstream)		0 to 100	x					
PPTU	Photocell Cooling Water (Upstream)		0 to 100	x					
PFUVI	Propellant Utilization Valve Inlet	PO8	0 to 2000	x					

TABLE III-1 (Continued)

AEDC Code	Parameter	Tap Number	Range	Digital Data System	Magnetic Tape	Oscillograph	Strip Chart	Event Recorder	X-Y Plotter
<u>Pressure, psia</u>									
PFUVO	Propellant Utilization Valve Outlet	PO9	0 to 1000	x					
PTCFJP	Thrust Chamber Fuel Jacket Purge		0 to 200	x					
PTEM	Turbine Exhaust Manifold	TG5	0 to 50	x					
PTM	Tapoff Manifold	GGT2	0 to 1500	x					
PTM-L	Tapoff Manifold	GG2	0 to 50	x			x (6)		
<u>Speeds, rpm</u>									
NFP-1	Fuel Pump	PFV	0 to 33000		x		x (2)		
NFP-2	Fuel Pump	PFV	0 to 33000	x					
NFP-3	Fuel Pump	PFV	0 to 33000				x		
NOP-1	Oxidizer Pump	POV	0 to 12000		x				
NOP-2	Oxidizer Pump	POV	0 to 12000	x					
NOP-3	Oxidizer Pump	POV	0 to 12000				x		
<u>Temperatures, °F</u>									
TA-1	Test Cell, North		-50 to 800	x					
TA-2	Test Cell, East		-50 to 800	x					
TA-3	Test Cell, South		-50 to 800	x					
TA-4	Test Cell, West		-50 to 800	x					
TECP-1P	Electrical Control Assembly	HST1a	-300 to 200	x					
TPASIJ (3)	Augmented Spark Igniter Fuel Injection	IFT	-425 to 100	x			x		
TFBMtt (4)	Thrust Chamber Bypass Manifold	GG2b	-440 to 500	x					
TFCD	Film Coolant Orifice	IFT1	-440 to 500	x					
TFD-Avg	Fire Detection		0 to 1000	x			x		
TFDFTA	Fire Detect Fuel Turbine Manifold Area		0 to 500	x					
TFDMFA	Fire Detect Main Fuel Valve Area		0 to 500	x					
TFDMOVA	Fire Detect Main Oxidizer Valve Area		0 to 500	x					
TFDODA	Fire Detect Oxidizer Dome Area		0 to 500	x					
TFDTDA	Fire Detect Tapoff Duct Area		0 to 500	x					
TFJ-1P	Fuel Injection	CFT2	-425 to -300	x					
TFJ-2P	Fuel Injection	CFT2a	-425 to 100	x			x		
TFPBS	Fuel Pump Balance Piston Sump	PFT4	-425 to 100	x				x (2)	
TFPD-1P	Fuel Pump Discharge	PFT1	-425 to -900	x	x				
TFPD-2P	Fuel Pump Discharge	PFT1	-425 to 100	x					
TFPD-3	Fuel Pump Discharge	PF3	-425 to -390	x					
TFPD-4	Fuel Pump Discharge	PF3	-425 to 100	x					
TFPI-1	Fuel Pump Inlet	KFT2	-425 to -400	x					x
TFPI-2	Fuel Pump Inlet	KFT2a	-425 to 100	x					x
TFPRS-1	Fuel Pump Rear Support		-400 to 1800	x					
TFPRS-2	Fuel Pump Rear Support		-400 to 1800	x					
TFPRS-3	Fuel Pump Rear Support		-400 to 1800	x					
TFRT-1	Fuel Run Tank		-425 to -400	x					
TFRT-3	Fuel Run Tank		-425 to -400	x					
TFTI-3	Fuel Turbine Inlet	TGT1	-300 to 2400	x			x		
TFTI-4	Fuel Turbine Inlet		-300 to 2000	x					
TFTO	Fuel Turbine Outlet		-100 to 1200	x					



TABLE III-1 (Continued)

<u>AEDC Code</u>	<u>Parameter</u>	<u>Tap Number</u>	<u>Range</u>	<u>Digital Data System</u>	<u>Magnetic Tape</u>	<u>Oscillograph</u>	<u>Strip Chart</u>	<u>Event Recorder</u>	<u>X-Y Plotter</u>
	<u>Temperature, °F</u>								
TFVC	Fuel Repressurization at Customer Connect Panel		-300 to -100	x					
TFVL	Fuel Repressurization Nozzle Inlet	KHPT1	-300 to -100	e					
THET-1P	Helium Tank	NNT1	-200 to 300	x					e
TLCS-E <sup>(2)</sup>	Load Cell Surface East		-240 to 300	e					
TLCS-N <sup>(2)</sup>	Load Cell Surface North		-240 to 300	e					
TMFVS-1	Main Fuel Valve Skin (Outer Well)		-425 to 100	e			e		
TMFVS-2	Main Fuel Valve Skin (Inner Well)		-425 to 100	e			e		
TNODP-1	Oxidizer Dome Purge at Customer Connect Panel		-250 to 200	e					
TNODP-2	Oxidizer Dome Purge at Customer Connect Panel		-250 to 200	e					
TOIML	Oxidizer Idle Mode Line	POT5	-300 to 100	x					
TOJ	Oxidizer Injection	COT1	-300 to 1200	e		e	e	(2)	
TOPBC	Oxidizer Pump Bearing Coolant	POT4	-300 to 1950	e			e		
TOPD-1P	Oxidizer Pump Discharge	POT3	-300 to -250	e					
TOPD-2P	Oxidizer Pump Discharge	POT3	-300 to 100	e					
TOPDF	Oxidizer Pump Discharge Flange		-300 to 100	e					
TOPI-1	Oxidizer Pump Inlet	KOT2	-310 to -250	e					x
TOPI-2	Oxidizer Pump Inlet	KOT2a	-310 to 100	e					e
TOPIB <sup>(4)</sup>	Oxidizer Pump Inlet Seal		-310 to 100	e					
TOPVS	Oxidizer Pump Volute Skin		-300 to 100	e					
TORPO <sup>(1)</sup>	Oxidizer Pump Recirculation Outlet		-300 to -250	x					
TORT-1	Oxidizer Run Tank		-300 to -285	e					
TORT-3	Oxidizer Run Tank		-300 to -285	x					
TOTI-1P	Oxidizer Turbine Inlet	TOT2	0 to 1200	x					
TOTM-1	Oxidizer Turbine Manifold		-300 to 1000	e					
TOTM-2	Oxidizer Turbine Manifold		-300 to 1000	x					
TOTO-1P	Oxidizer Turbine Outlet	TGT4	0 to 1000	e					
TPIP-1P	Instrumentation Pockego		-300 to 200	x					
TPTU	Photocon Cooling Water (Upstream)		0 to 300	e					
TSCGA-1	Solid-Propellant Turbine Starter Cond. Gas 1		-100 to 300	e					
TSCGA-2	Solid-Propellant Turbine Starter Cond. Gas 2		-100 to 300	x					
TSCGA-3	Solid-Propellant Turbine Starter Cond. Gas 3		-100 to 300	e					
TSCMF-1	Solid-Propellant Turbine Starter Case Mount Flange		-300 to 2382	x					
TSCMF-2	Solid-Propellant Turbine Starter Case Mount Flange		-300 to 2382	x					
TSCMF-3	Solid-Propellant Turbine Starter Case Mount Flange		-300 to 2382	e					
TTCIS-1 <sup>(2)</sup>	Thrust Chamber Internal Skin		-425 to 100	x					
TTCIS-2 <sup>(2)</sup>	Thrust Chamber Internal Skin		-425 to 100	x					
TTCIS-3 <sup>(2)</sup>	Thrust Chamber Internal Skin		-425 to 100	e					
TTCIS-5 <sup>(2)</sup>	Thrust Chamber Internal Skin		-425 to 100	x					
TTCIS-6 <sup>(2)</sup>	Thrust Chamber Internal Skin		-425 to 200	e					
TCP	Thrust Chamber Purge		-250 to 200	e					

TABLE III-1 (Concluded)

<u>AEDC Code</u>	<u>Parameter</u>	<u>Tap Number</u>	<u>Range</u>	<u>Digital Data System</u>	<u>Magnetic Tape</u>	<u>Oscillo-graph</u>	<u>Strip Chart</u>	<u>Event Recorder</u>	<u>X-Y Plotter</u>
<u>Temperature, °F</u>									
TTCT-E1	Thrust Chamber Tube (Exit)		-425 to 500	x					
TTCT-E2	Thrust Chamber Tube (Exit)		-425 to 500	x					
TTCT-T1	Thrust Chamber Tube (Throat)		-425 to 500	x				x (5)	
TTCT-T2	Thrust Chamber Tube (Throat)		-425 to 500	x				x (2)	
TTCT-T3	Thrust Chamber Tube (Throat)		-425 to 500	x					
TTCT-T4	Thrust Chamber Tube (Throat)		-425 to 500	x					
TTCT-T5	Thrust Chamber Tube (Throat)		-425 to 500	x					
TTM	Tapoff Manifold		0 to 2000	x		x	x		
<u>Peak Vibrations, g</u>									
UOPR	Oxidizer Pump Radial	PEA-2	300 peak		x				
UTCD-1	Thrust Chamber Dome	PEA-1a	1400 peak		x	x			
UTCD-2	Thrust Chamber Dome	PEA-2	1400 peak		x	x			
UTCD-3	Thrust Chamber Dome	PEA-3	300 peak		x	x			
UTCD-4	Thrust Chamber Dome		1400 peak		x				
UTCD-5	Thrust Chamber Dome		1400 peak		x				
UTCD-6	Thrust Chamber Dome		1400 peak		x				
UTMR	Tapoff Manifold Radial		300 peak		x				
<u>Voltage, volts</u>									
VCS	Control Bus		0 to 36	x					
VIB	Ignition Bus		0 to 36	x					
VIDA-1	Ignition Detect Amplifier		9 to 16	x					
VIDA-2	Ignition Detect Amplifier		9 to 16	x					
VPUVEP	Propellant Utilization Valve Telemetry Potentiometer Excitation		0 to 5	x					

- NOTES: (1) Required for J4-1001-11 only  
(2) Required for J4-1001-15 only  
(3) Required for J4-1001-06, 07, and 11 only  
(4) Required for J4-1001-06 and 07 only  
(5) Required for J4-1001-06, 07, and 15 only  
(6) Required for J4-1001-07, 11, and 15 only

**APPENDIX IV  
METHODS OF CALCULATIONS****NOMENCLATURE**

<b>A</b>	Area, sq in.
<b>C*</b>	Characteristic velocity, ft/sec
<b>F</b>	Thrust, lbf
<b>g</b>	Gravitational constant, 32.174 lbf-ft/lbf-sec <sup>2</sup>
<b>I</b>	Impulse, sec
<b>MR</b>	Mixture ratio, by weight
<b>P</b>	Pressure, psia
<b>W</b>	Flow rate, lbf/sec
<b><math>\rho</math></b>	Density, lbf/cu ft

**SUBSCRIPTS**

<b>a</b>	Ambient
<b>c</b>	Chamber
<b>e</b>	Exit
<b>f</b>	Fuel
<b>o</b>	Oxidizer
<b>sp</b>	Specific
<b>t</b>	Total
<b>vac</b>	Vacuum

**SUPERSCRIPTS**

<b>*</b>	Throat
----------	--------

## CALCULATIONS

### I. MAINSTAGE PERFORMANCE

#### Flow Rates

Total Propellant Flow Rate

$$W_t = W_f + W_o$$

#### Mixture Ratio

Total Propellant Mixture Ratio

$$MR = \frac{W_o}{W_f}$$

#### Vacuum Thrust

$$F_{vac} = [193.73 + 3.34 (MR)] P_c + P_a A_e$$

where  $A_e = 4643.3$  sq in.

#### Vacuum Specific Impulse

$$(I_{sp})_{vac} = \frac{F_{vac}}{W_t}$$

#### Characteristic Velocity

$$C^* = \frac{P_c A^* g}{W_t}$$

where  $A^* = 117.1$  in.<sup>2</sup>

### II. PROPELLANT FLOW RATES

Propellant flow rates are based on engine flowmeter constants supplied by the engine manufacturer: 5.50 and 2.00 Hz per gal for the oxidizer and fuel, respectively. Propellant properties for conversion of volumetric to weight flow were obtained from Refs. 9 and 10 for hydrogen and oxygen, respectively.

## DOCUMENT CONTROL DATA - R &amp; D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a. REPORT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>	
		2b. GROUP N/A	
3. REPORT TITLE <b>ALTITUDE DEVELOPMENTAL TESTING OF THE J-2S ROCKET ENGINE IN ROCKET DEVELOPMENT TEST CELL (J-4) (TESTS J4-1001-06, -07, -11, AND -15)</b>			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) <b>Interim Report - August 25 to October 29, 1969</b>			
5. AUTHOR(S) (First name, middle initial, last name) <b>C. E. Pillow, ARO, Inc.</b> This document has been approved for public release; its distribution is unlimited. <i>Per AF Letter 12 July 70</i>			
6. REPORT DATE <b>September 1970</b>		7a. TOTAL NO. OF PAGES <b>117</b>	
8a. CONTRACT OR GRANT NO. <b>F40600-71-C-0002</b>		8a. ORIGINATOR'S REPORT NUMBER(S) <b>AEDC-TR-70-204</b>	
b. PROJECT NO. <b>9194</b>		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) <b>ARO-ETF-TR-70-191</b>	
c. Program Element <b>921E</b>			
10. DISTRIBUTION STATEMENT <b>Each transmittal of this document outside the Department of Defense must have prior approval of NASA, Marshall Space Flight Center (PM-EP-J), Huntsville, Alabama 35812.</b>			
11. SUPPLEMENTARY NOTES <b>Available in DDC</b>		12. SPONSORING MILITARY ACTIVITY <b>NASA, Marshall Space Flight Center (PM-EP-J), Huntsville, Alabama 35812</b>	
13 ABSTRACT <b>Eleven firings of the Rocketdyne J-2S rocket engine were conducted in Rocket Development Test Cell (J-4) of the Engine Test Facility on August 25, 28, September 17, and October 29, 1969. These firings were accomplished at pressure altitudes ranging from 80,000 to 108,000 ft at engine start signal. The major objectives for these tests were to verify stable idle-mode operation, confirm that oxidizer injection temperatures were not excessive during transition from main-stage to post-main-stage idle-mode operation, evaluate main-stage performance, and determine the rate at which thrust chamber temperature increased during pre-main-stage idle mode. A full-face oxidizer flow injector configuration was utilized during this series of tests for the distribution of oxidizer during idle-mode operation. Brief durations (&lt;20 sec) of stable idle-mode operation (chamber pressure oscillations &lt;± psi) were achieved. Oxidizer injection temperatures exhibited only insignificant increases (&lt;10°F) during transition to post-main-stage idle-mode operation. The maximum rate at which the thrust chamber temperature increased during idle-mode operation with high oxidizer (45-psia) and low fuel (27-psia) pump inlet conditions was 6°F/sec. Three firings which simulated orbital restart conditions were prematurely terminated during transition to main stage by the vibration safety cutoff system. Liquid fuel was present at the injector at dome prime when the excessive vibrations were first recorded. [This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of NASA, MSFC (PM-EP-J), Huntsville, Alabama 35812.]</b>			

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
<p>J-2S rocket engines                      solid-propellants                      performance                      rocket motors                      combustion efficiency                      S-IVB battleship stage</p> <p>1. Rocket motors -- J-2 S                      2 " " -- Performance                      3 " " -- Combustion</p>						