



**US Army Corps
of Engineers®**
Engineer Research and
Development Center



Dredging Operations and Environmental Research Program

Evaluation of Biodiesel Fuels to Reduce Fossil Fuel Use in Corps of Engineers Floating Plant Operations

Michael Tubman, Timothy Welp, Ryan Immel,
and Robert Leitch

July 2016

The U.S. Army Engineer Research and Development Center (ERDC) solves the nation's toughest engineering and environmental challenges. ERDC develops innovative solutions in civil and military engineering, geospatial sciences, water resources, and environmental sciences for the Army, the Department of Defense, civilian agencies, and our nation's public good. Find out more at www.erdclibrary.usace.army.mil.

To search for other technical reports published by ERDC, visit the ERDC online library at <http://acwc.sdp.sirsi.net/client/default>.

Evaluation of Biodiesel Fuels to Reduce Fossil Fuel Use in Corps of Engineers Floating Plant Operations

Michael Tubman and Timothy Welp

*Coastal and Hydraulics Laboratory
U.S. Army Engineer Research and Development Center
3909 Halls Ferry Road
Vicksburg, MS 39180-6199*

Ryan Immel

*U.S. Army Corps of Engineers Marine Design Center
U.S. Army Engineer District, Philadelphia
100 Penn Square East
Philadelphia, PA 19107-3390*

Robert Leitch

*Headquarters
U.S. Army Corps of Engineers
441 G Street NW
Washington, DC 20314-1000*

Final report

Approved for public release; distribution is unlimited.

Prepared for U.S. Army Corps of Engineers
Washington, DC 20314-1000

Under Work Unit 456009, "Feasibility of Using Biodiesel"

Abstract

A study to evaluate the feasibility of using biodiesel fuel in U.S. Army Corps of Engineers (USACE) floating plant operations to reduce environmentally sensitive emissions, increase use of renewable energy, and reduce the use of fossil fuels was conducted with funding from the U.S. Army Corps of Engineers (USACE) Dredging Operations and Environmental Research (DOER) program and the USACE Sustainability and Energy Efficiency Program. This study was conducted by the USACE Engineer Research and Development Center (ERDC) and the USACE Marine Design Center (MDC), in conjunction with support of USACE Headquarters (HQUSACE) and participating USACE Districts. The study began in 2010 with a focus on the methodology to convert four working USACE vessels to biodiesel. Favorable results in regards to mechanical and operational issues cleared the way for evaluating biodiesel on additional vessels. Fourteen vessels were converted to biodiesel use in the expanded study, and additional tests of emissions and fuel usage were conducted on two vessels. This report describes the study that successfully demonstrated that use of certified biodiesel fuel (including biodiesel manufactured from soybeans and from algal oils) by suitable USACE floating plants is feasible to reduce select environmentally sensitive emissions, increase USACE use of renewable energy, and reduce the use of fossil fuels.

DISCLAIMER: The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products. All product names and trademarks cited are the property of their respective owners. The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

DESTROY THIS REPORT WHEN NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.

Contents

Abstract	ii
Figures and Tables.....	iv
Preface.....	vi
Unit Conversion Factors	viii
Acronyms	ix
1 Introduction.....	1
Background	1
Objective	1
Approach.....	2
2 The Diesel Plant Conversion Process	3
A three-step process	3
Education.....	4
Pretrial assessment and action plan	11
3 Evaluation Study Results and Assessment.....	14
Fuel consumption.....	14
Emissions.....	15
Operational performance.....	18
4 Expanded Operational Experience and Improved Testing of Emissions and Fuel Consumption.....	20
Emissions and fuel consumption test procedures	22
Emissions and fuel consumption test results.....	23
Expanded operational experience results	35
5 Conclusions.....	38
References	40
Appendix A: Vessels in Expanded Study.....	41
Appendix B: ASTM D6751.....	46
Appendix C: B100 Test Results.....	47
Report Documentation Page	

Figures and Tables

Figures

Figure 1. U.S. Army Engineer District Baltimore (NAB) drift collection vessel <i>BD-5</i>	7
Figure 2. U.S. Army Engineer District St. Louis (MVS) towboat <i>Pathfinder</i>	7
Figure 3. U.S. Army Engineer District San Francisco (SPN) debris boat <i>Raccoon</i>	8
Figure 4. U.S. Army Engineer District Buffalo (LRB) tug <i>Mike Donlon</i>	8
Figure 5. <i>Raccoon</i> starboard propulsion engine (A) with FlowScan fuel-flow interface meter components, (B) fuel consumption LCD readout, and (C) fuel-line flow meter (one installed on the fuel supply line and one installed on the fuel return line).....	10
Figure 6. The <i>Mike Donlon</i> conducting a push test.....	11
Figure 7. Fuel hoses degraded by B100.	13
Figure 8. CO ₂ emissions for the <i>BD-5</i>	16
Figure 9. CO ₂ emissions for the <i>Pathfinder</i>	16
Figure 10. CO ₂ emissions for the <i>Mike Donlon</i>	17
Figure 11. <i>Pathfinder</i> port engine NO _x emissions.	18
Figure 12. Output of NMEA2000 Interface to FlowScan fuel-flow monitoring system.....	21
Figure 13. Emissions testing instrumentation connected directly into the exhaust stack on the <i>BD-5</i>	22
Figure 14. Fuel consumption versus engine power for the <i>Raccoon</i>	24
Figure 15. Brake-specific fuel consumption of B100 (blue), ULSD (green), and Solazyme (red) fuels for the <i>Raccoon</i>	24
Figure 16. Emissions of CO ₂ versus engine power for the <i>Raccoon</i>	25
Figure 17. Emissions of CO ₂ for B100 (blue), ULSD (green), and Solazyme (red) fuels for the <i>Raccoon</i>	26
Figure 18. Emissions of CO versus engine power for the <i>Raccoon</i>	26
Figure 19. Emissions of CO for B100 (blue), ULSD (green), and Solazyme (red) fuels for the <i>Raccoon</i>	27
Figure 20. Emissions of NO _x versus engine power for the <i>Raccoon</i>	27
Figure 21. Emissions of NO _x for B100 (blue), ULSD (green), and Solazyme (red) fuels for the <i>Raccoon</i>	28
Figure 22. Emissions of PM _{2.5} versus engine power for the <i>Raccoon</i>	28
Figure 23. Emissions of PM _{2.5} for B100 (blue), ULSD (green), and Solazyme (red) fuels for the <i>Raccoon</i>	29
Figure 24. Fuel consumption versus engine power for the port engine (right) and the starboard engine (left) for the <i>BD-5</i>	30
Figure 25. Emissions of CO ₂ versus engine power for the <i>BD-5</i>	31
Figure 26. Emissions of CO versus engine power for the <i>BD-5</i>	31
Figure 27. Emissions of NO _x versus engine power for the <i>BD-5</i>	32
Figure 28. Emissions of PM _{2.5} versus engine power for the <i>BD-5</i>	32

Figure A1. U.S. Army Engineer District Baltimore (NAB) drift collection vessel <i>BD-6</i>	42
Figure A2. U.S. Army Engineer District St. Louis (MVS) dustpan dredge <i>Potter</i>	42
Figure A3. U.S. Army Engineer District Portland (NWP) hopper dredge <i>Yaquina</i>	43
Figure A4. U.S. Army Engineer District St Louis (MVS) towboat <i>GrandTower</i>	43
Figure A5. U.S. Army Engineer District St Louis (MVS) towboat <i>Prairie du Rocher</i>	43
Figure A6. U.S. Army Engineer District St Louis (MVS) towboat <i>Kimmswick</i>	44
Figure A7. U.S. Army Engineer District St Louis (MVS) crane barge <i>Fisher</i>	44
Figure A8. U.S. Army Engineer District St Louis (MVS) crane barge <i>Sewell</i>	44
Figure A9. U.S. Army Engineer District St Louis (MVS) crewboat <i>Barron</i>	45
Figure A10. U.S. Army Engineer District St Louis (MVS) crane barge <i>Derrick Number 6</i>	45

Tables

Table 1. Biodiesel evaluation study floating plant equipment descriptions.....	6
Table 2. Average B100 fuel consumption compared to No.2 diesel fuel consumption for the run tests (positive numbers indicate increased B100 consumption and negative numbers indicated lower B100 consumption).....	14
Table 3. Average B100 fuel consumption compared to No.2 diesel fuel consumption for the push tests (positive numbers indicate increased B100 consumption and negative numbers indicated lower B100 consumption).....	14
Table 4. Average emissions values (D - No. 2 diesel and B - B100) of the port and starboard engines. Units are percent volume for CO ₂ and ppm for CO and NO _x	17
Table 5. Raccoon diesel costs.	19
Table 6. Fuel properties.....	20
Table 7. Fuel consumption for the <i>Raccoon</i>	23
Table 8. Emissions of CO ₂ , CO, and NO _x for the <i>Raccoon</i>	25
Table 9. Emissions of PM _{2.5} (g/kWhr) for the <i>Raccoon</i>	28
Table 10. Fuel consumption for the <i>BD-5</i>	29
Table 11. Emissions of CO ₂ , CO, and NO _x and PM _{2.5} for the <i>BD-5</i>	30
Table 12. Weighted emissions factors for the <i>Raccoon</i> (g/kWhr).....	35
Table A1. Expanded operational testing and biodiesel evaluation study of floating plant equipment descriptions.....	41

Preface

This study was conducted for the Headquarters, U.S. Army Corps of Engineers, (HQUSACE) under the Dredging Operations and Environmental Research (DOER) Program, Work Unit 456009, “Feasibility of Using Biodiesel.” The technical monitor was Dr. Todd Bridges (CEERD-EM-D).

The work was performed by the Coastal Engineering Branch of the Navigation Division (CEERD-N), U.S. Army Engineer Research and Development Center, Coastal and Hydraulics Laboratory (ERDC-CHL). At the time of publication, Tanya Beck was Chief, CEERD-HN-C; Dr. Jackie Pettway was Chief, CEERD-HN; and Jeffery Lillycrop, CEERD-HT was the Technical Director for Navigation. The Director of CHL was José E. Sánchez.

This effort was supported by the USACE Dredging Operations and Environmental Research (DOER) Program (<http://el.erdcc.usace.army.mil/dots/doer/doer.html>) and the USACE Sustainability and Energy Efficiency Program. The DOER Program is managed at the U.S. Army Engineer Research and Development Center (ERDC) by Dr. Todd Bridges, Environmental Laboratory (EL), and Charles E. Wiggins, Coastal and Hydraulics Laboratory (CHL). The USACE Sustainability and Energy Efficiency Program is managed by John Coho, HQUSACE.

DOER is administered at CHL under the USACE Navigation Research, Development, and Technology Transfer (RD&T) Program. At the time this effort was conducted, James Walker was the HQUSACE Navigation Business Line Manager overseeing the DOER Program. Jeffery Lillycrop, CHL, was the ERDC Technical Director for Civil Works and Navigation RD&T. Charles E. Wiggins, CHL, was the ERDC Associate Technical Director for Navigation.

This study would not have been possible without the managers and crews in the U.S. Army Engineer Districts Baltimore, Buffalo, San Francisco, Portland, New York, and St. Louis who volunteered the use of their vessels. The authors wish to express thanks to the management and crews of the USACE vessels *BD-5* and *BD-6* (Captain Jeff Peacock, Corey Griffing,

Steve Golder, Benjamin Birney, Andy Boyle, Langston Spencer, and Joe Huber), *Donlon* (Paul Bijhouwer, Timothy Colburn, Dennis Claycomb, and Timothy Zbin), *Raccoon* (Kent Danielson, Captain Joe McCormick, Erick Romani, Dave Whelsdon, Paul Tietjen, Rick Curry, Dan Denofrio, and Marty Plisch), *Pathfinder* (Jared Schmidt, Gary Lowe, Lance Engle, Captain Terry Bequette, Mike Morgan, Tom Brace, Larry Baltzell and Bret Leavitt), *Potter* (Chris Stokes and members of *Potter* crew), *Grandtower* (Scott Lussier), *Yaquina* (Jerry Gompers, Captain Mark Keen, Captain Jonathan Blake, Erik Risheim, Steve Burock, and other members of *Yaquina* crew), and *Gelberman* (Liz Finn and Bill Lyness). The authors thank Captain David Beal (MVS) for his support of the project.

Vessel power and emissions testing was conducted by the Bristol Harbor Group (Russel Bostock) and the Center for Environmental Research and Technology, University of California, Riverside (Nicholos Gysel, William Welch, and Wayne Miller). USACE is part of a Federal Green Fleet working Group that includes members from the National Oceanographic and Atmospheric Administration (NOAA), Army Petroleum Center (APC), United States Army Tank Automotive Research, Development and Engineering Center (TARDEC), Defense Logistics Agency (DLA ENTERGY), Maritime Administration (MARAD), U.S. Navy (USN), and the U.S. Coast Guard (USCG).

At the time of publication of this report, the Commander of ERDC was COL Bryan S. Green, and the Director was Dr. Jeffery P. Holland.

Unit Conversion Factors

The conversions between non-SI units of measurement and SI (metric) units in this report are as follows:

Multiply	By	To Obtain
feet	0.3048	Meters
pound-mass per cubic foot	16.0185	grams per cubic centimeter
pound-mass	0.4536	Kilograms
gallon	3.7854	Liters
horsepower	745.7000	Watts
pound-mass	453.5929	Grams
Grams per cubic centimeter (g/cm^3) can be converted to grams per liter (g/L , equivalent to kg/m^3) by multiplying by 1000.		

Acronyms

The test standard acronyms in this report are

- ASTM – American Standard Testing Methods
- ISO – International Standards Organization.

1 Introduction

Background

The U.S. Army Corps of Engineers (USACE) has approximately 2,300 floating plant assets that consist of (in an approximate order of magnitude) barges, tow boats, floating cranes, survey boats, patrol boats, and the minimum fleet dredges. The fiscal year (FY) 2010 fuel consumption was approximately 31.378 million liters (8.290 million gallons) of diesel. On 5 October 2009, Executive Order 13514 was issued by President Obama (Council on Environmental Quality 2009) that requires Federal agencies to develop a strategic sustainability performance plan (SSPP) to reduce energy consumption and greenhouse gas emissions, increase agency use of renewable energy, and reduce the use of fossil fuels. For USACE floating plant, one of the main strategies of the USACE SSPP is reducing diesel fuel consumption, and a potential way to accomplish that is to substitute biodiesel for regular petroleum-derived diesel.

Biodiesel is a domestic, renewable fuel originating from plant or animal feed stocks. Biodiesel manufactured from soybeans was selected for the initial evaluation phase because of the high success experienced by the National Oceanographic and Atmospheric Administration's (NOAA) Lake Michigan Field Station (LMFS). The LMFS has successfully used biodiesel manufactured from soybeans in a variety of vessels for over 10 years in Muskegon, MI. During that time they experimented with different blends of biodiesel such as B20 (20% biodiesel, 80% diesel) and have found that B99.9 (99.9% biodiesel, 0.1% diesel) is the most reliable and problem-free type of biodiesel. Biodiesel B99.9, being a blend of biodiesel and regular diesel, exists due to tax incentives enacted for certain types of blended fuels. Technically, B100, unblended biodiesel, is different; however, practically, its properties are nearly indistinguishable from B99.9. In this report, pure biodiesel will be referred to as B100, regardless of whether it is B99.9 or B100.

Objective

The objective of this study was to evaluate the use of biodiesel fuel in U.S. Army Corps of Engineers (USACE) floating plant operations to reduce

environmentally sensitive emissions, increase use of renewable energy, and reduce the use of fossil fuels.

Approach

The evaluation study began in 2010 with a focus on the methodology to convert four working USACE vessels to biodiesel. The vessels were made available by USACE Districts Baltimore (NAB), St. Louis (MVS), San Francisco (SPN), and Buffalo (LRB). A large part of LMFS success is due to the careful methodology that was applied. Information, education, and participation were key elements in bringing people on board, explaining both the purpose and the process in detail, and cultivating beneficial relationships with vessel operators, crews, suppliers, and regulatory agencies. In LMFS experience, once the initial change occurred, the crew assessments were that the use of biodiesel was a “non-issue” and that the “benefits outweighed the hassles.” Another critical relationship was with the original engine manufacturers (OEM), where the major diesel engine manufacturer’s representatives were involved from the beginning for their validation and participation. USACE decided to emulate the LMFS approach for the USACE evaluation study.

After successfully converting the four USACE vessels to biodiesel, preliminary results indicated that engine performance, maintenance, and operational efficiency, were not adversely impacted by using biodiesel fuel. Results from tests on fuel consumption and emissions were found to be limited by the technical level of the evaluation methodology. This led to evaluating biodiesel usage in an increased number and more diverse types, of vessels and additional testing of first- and second-generation biodiesel fuels with improved monitoring of fuel consumption and emissions.

2 The Diesel Plant Conversion Process

A three-step process

The conversion process consists of three distinct steps which lead to the actual mechanical conversion to the vessels. The emphasis is on improving education and understanding of the entire fuel process as a required qualification before moving on to any physical conversions. The steps are as follows:

1. Education
 - a. Benefits of biodiesel
 - b. Myths, misinformation, and past experiences
 - c. Similarities and differences
 - d. Areas of concern
 - e. Implementation plan
 - f. Monitoring plan
 - g. Response plan
 - h. Measures and conclusions
2. Pretrial Assessment
 - a. Resources and personnel
 - b. Fuel tank(s)
 - c. Residual fuel condition
 - d. Distribution
 - e. Filtration
 - f. Injection pumps
 - g. Engine – external condition
 - h. Engine – performance issues
 - i. Exhaust measures
3. Action Plan
 - a. Biodiesel supplier evaluation
 - b. Training and expectations
 - c. Measures and alternatives
 - d. Address mechanical issues/impacts
 - e. Consider process improvements/impacts

Education

Benefits of using biodiesel include (DOE 2003) include the following:

- lower emissions than petroleum-based fuels
- lower environmental impact – as biodegradable as sugar and ten times less toxic than table salt
- renewable energy source
- improved health and safety – less-offensive odor, higher flash point, can reduce carcinogenic properties (compared to diesel fuel) by 94%
- improved engine performance – higher lubricity and solvent levels.

Much of the educational process was addressed by the formation of the Federal Non-Tactical Vessel (FNTV) Biodiesel Initiative, which was created to explore the operational feasibility of expanding the use of B100 in nontactical Federal vessels operated primarily by NOAA, USACE, and MARAD. Other members of the FNTV include personnel from the APC, TARDEC, DLA ENTERGY, USN, and USCG. The FNTV Working Group convened in August 2010 to review the methodology proven through the demonstrated success of LMFS in using B100 in a variety of vessels over the preceding 10 years. LMFS data relating to the differences in fuel costs, reduced maintenance, health and safety issues, and reduced greenhouse gas emissions of B100 compared to diesel fuel were examined in detail by members of the working group. Also discussed were several other reports and sources of data from industry, the department of Energy's Office of Energy Efficiency and Renewable Energy (EERE), and the National Biodiesel Board. Based on this review and consensus by the FNTV, USACE spearheaded an expansion of the scope of NOAA testing to cover a variety of USACE vessels.

The FNTV Working Group's review of available information and past experiences led to its endorsement of LMFS experience that the use of biodiesel was not an issue with vessel operators and that the benefits outweighed any difficulties encountered in converting to biodiesel. However, they did identify the following areas of concern:

1. Cold-flow properties

Similar to regular diesel, but more pronounced for biodiesel, solid crystals can form in the fuel at relatively higher (than diesel) temperatures. These crystals can plug filters, and at lower

- temperatures, so many agglomerated crystals can form that the fuel will no longer flow.
2. **Material compatibility**

B100 may soften and degrade certain types of rubber compounds used for hoses and gaskets and may cause them to leak or degrade.
 3. **Microbial growth**

Biodiesel will grow microbes, much as diesel will.
 4. **Combustion properties**

The energy content of soybean based biodiesel is 7% to 10% less by volume than that of regular No. 2 diesel fuel (DOE 2003).
 5. **Filter plugging**

As a result of B100 solvent properties, any accumulated deposits in an existing fuel tank and system will be dissolved and carried through the system where they can clog filters.
 6. **Water separation**

B100 is capable of holding water in the amount of approximately 1% of its volume. The presence of water in fuel reduces combustion heat, increases corrosion and pitting, accelerates microbe growth, and provides nucleation sites for cold-flow gelling (DOE 2003).
 7. **Storage stability**

The National Biodiesel Board (NBB) states that industry experts recommend that to maintain the quality of the fuel, biodiesel should be used within 6 months of purchase.
 8. **OEM warranties**

Engine manufacturers generally state that several biodiesel fuel-related issues can have a detrimental effect on engine performance and condition.

9. Cost

Biodiesel prices vary across the country and tend to be “slightly higher” than those for petroleum diesel (DOE 2014).

The implementation plan addressed the identified areas of concern.

The USACE implementation plan specified an evaluation study to be conducted on four USACE vessels:

- the *BD-5*, a drift collection vessel used by the Washington, DC, Debris Unit (NAB)
- the *Pathfinder*, a towboat at the St. Louis, MO, Base Yard (MVS)
- the *Raccoon*, a debris boat at the Sausalito, CA, Base Yard (SPN)
- the *Mike Donlon*, a tug used by the Buffalo, NY, District (LRB).

Descriptions of these floating plant and installed diesel equipment are presented in Table 1, and their respective photographs shown in Figures 1 through 4.

Table 1. Biodiesel evaluation study floating plant equipment descriptions.

Location	District	Vessel	Fuel Usage (L/hr) (gal/hr)	Propulsion	Generator
Washington, DC Debris Unit	NAB	<i>BD-5</i> (11 m) drift collection vessel, 1991, fuel cap, 1,892 L (500 gal)	7.6 (2)	2 Cummins 6BTA5.9M3	1 Yanmar, YDG 3700EV, Engine Model L70V6HJ1COGAYG
St. Louis, MO Base Yard	MVS	<i>Pathfinder</i> (23 m) towboat, 1995, fuel cap. 51,300 L (13,555 gal)	378.5 (100)	2 Caterpillar 3412	2 Caterpillar 3304
Sausalito, CA Base Yard	SPN	<i>Raccoon</i> (30 m) debris boat, 1949, fuel cap. 4,542 L (1,200 gal)	56.8 (15)	2 Cummins QSK19-M	1 Onan 4045TFM75A
Ohio Area Office	LRB	<i>Mike Donlan</i> (16 m) tug, 1999, fuel cap. 3311 L (875 gal)	116 (30)	2 Cummins NT-855-M (configuration D092347MX02)	Cummins-Onan MCGBA

Figure 1. U.S. Army Engineer District Baltimore (NAB) drift collection vessel *BD-5*.



Figure 2. U.S. Army Engineer District St. Louis (MVS) towboat *Pathfinder*.



Figure 3. U.S. Army Engineer District San Francisco (SPN) debris boat *Raccoon*.



Figure 4. U.S. Army Engineer District Buffalo (LRB) tug *Mike Donlon*.



It was initially expected that cold flow properties would not be an issue for the USACE tests, but temperature concerns expressed by several biodiesel suppliers delayed fueling and field testing at several sites while waiting for warmer weather. Due to the external fuel tanks on the *Raccoon*, tank heaters were installed to mitigate potential cold weather flow properties.

LMFS has never had any kind of OEM failure or maintenance issue with an engine due to material compatibility issues. Overall, LMFS experience is that good vessel housekeeping will help ensure successful biodiesel usage; however, because of the potential biodiesel compatibility issues, the various Districts were advised to have engine condition assessments conducted before proceeding with the field demonstrations. The following items were recommended for inspection with the condition to be noted if acceptable, and if questionable, the component should be noted and repair or replacement should be considered:

- injectors
- valves, especially exhaust valves
- fuel lines, hoses, and seals.


In addition, it was recommended that new 10-micron fuel filters be installed and changed more frequently than was done when using No. 2 diesel.

The monitoring plan, as it applied to the evaluation study, called for working with the vessel operators to ensure that the areas of concern and the recommended inspections were understood and that any issues that arose were communicated to the study management. The cold-flow properties of biodiesel elicited the only significant concerns and were addressed by the delays for warmer weather and the heat pads that were installed on the *Raccoon* fuel tanks. Testing of the properties of the B100 supplied for the evaluation study were part of the monitoring plan. Fuel properties and costs were monitored in the evaluation study. Samples of biodiesel were analyzed and compared to the ASTM D6751 specifications. The different biodiesel fuel costs that were charged to the various Districts during the study were recorded.

Performance and emissions tests were a major part of the study monitoring plan. The fuel performance tests consisted of the *run test* and the *push test*. For the run test, the vessel was operated at a normal (constant) power level (set revolutions per minute [RPM]) over a water

course selected to reduce hydrodynamic variability (currents and waves) as much as possible. This run test was conducted a minimum of three times each for operation using B100 and operation using No. 2 diesel. Run times, RPM, fuel consumption rates (gallons per hour [gph]), and total fuel consumption on each engine are recorded for each test. RPM are recorded from the engine management systems of the respective vessels. To measure fuel consumption rates, FlowScan fuel flow interface meters were installed on each propulsion engine. These meters combine a digital LCD engine hour meter, tachometer, fuel flowmeter, and fuel totalizer in a single instrument display that fits the panel space of a standard tachometer. These meters incorporate a two-stage adjustable calibration of gallons per hour and gallons used for increased accuracy (reportedly within $\pm 3\%$ accuracy) and incorporate a momentary ON /constant OFF toggle button switch for resetting fuel totalizer readings. Figure 5 shows the various FlowScan system components set up in the *Raccoon's* engine room on the starboard engine.


Figure 5. *Raccoon* starboard propulsion engine (A) with FlowScan fuel-flow interface meter components, (B) fuel consumption LCD readout, and (C) fuel-line flow meter (one installed on the fuel supply line and one installed on the fuel return line).

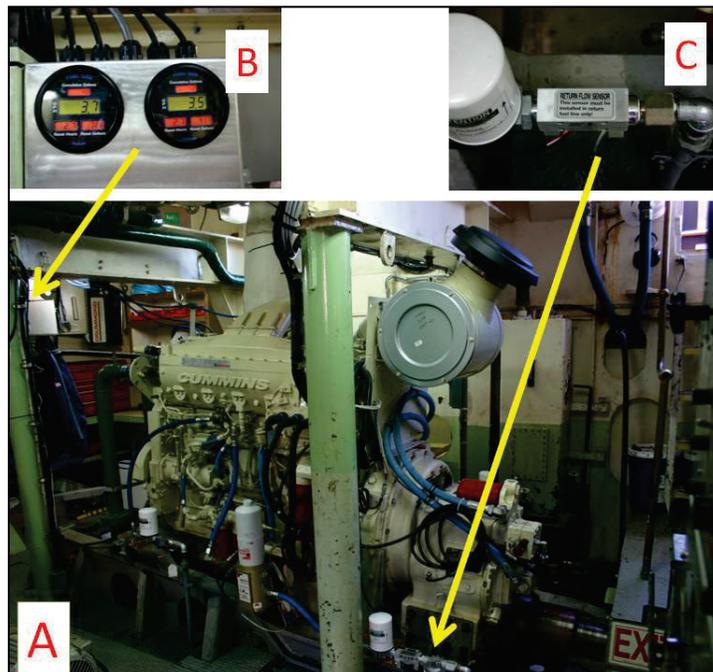

Each set of tests was performed while operating the engines on No. 2 diesel and then run again when the engines were operating on biodiesel. All tests were performed with engines at normal operating temperatures. Test conditions (wind, weather, etc.) were also recorded to duplicate conditions as closely as possible for each test.

The push test consisted of the vessel nosing up to a structure and pushing for 5 min at a steady RPM setting. Three settings were evaluated: minimum RPM (knuckled-in), mid-range RPM, and maximum RPM. These three RPM settings were performed three times each, and RPM, fuel consumption, and total fuel consumption on each engine recorded for each 5 min test. Similar to the run tests, these trials were conducted with the engines running on B100 and with them running on No. 2 diesel in the same locations, under as similar conditions as possible. Figure 6 shows the *Mike Donlon* conducting a push test in the Cleveland Ohio Harbor. Emissions of CO₂ (calculated from measured oxygen, O₂, emissions), NO_x, and CO were monitored during the push tests using a Testo 350XL portable emissions analyzer.

Figure 6. The *Mike Donlon* conducting a push test.

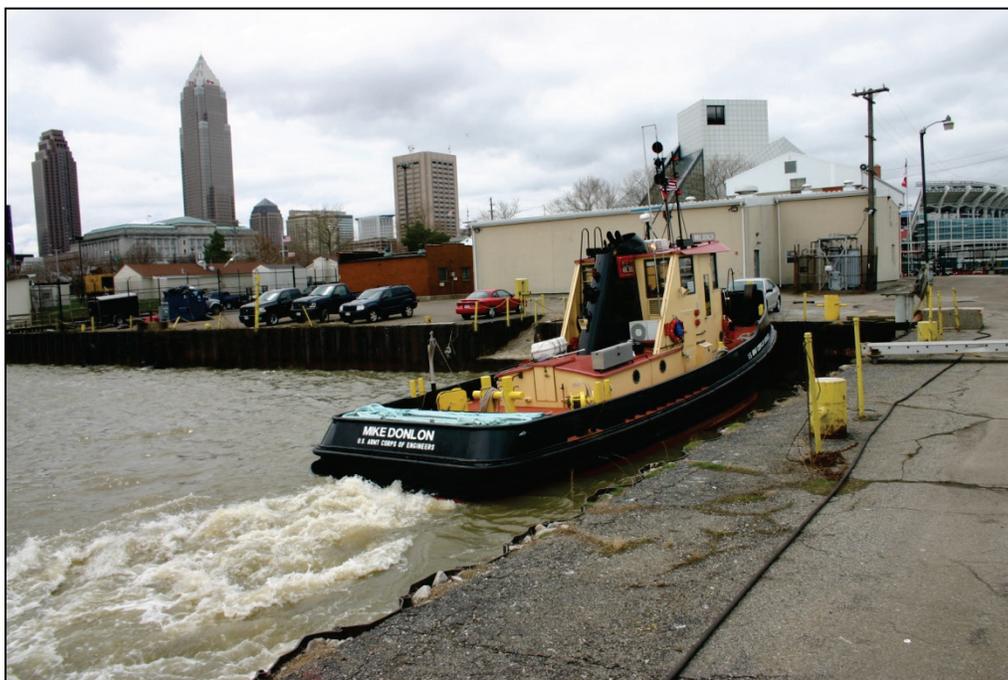

Pretrial assessment and action plan

The pretrial assessments were conducted by the various Districts. The *BD-5* had her fuel tanks cleaned specifically for the evaluation study. The

Raccoon installed the four 1000-watt Arctic Fox pad-heaters to the bottom of each of their external 600-gallon fuel tanks. The heaters required significant electrical upgrades including a new sub panel in the engine room. These heaters are automatically controlled by thermostats. New 10-micron filters were installed on all four vessels, and the *Pathfinder* had new fuel injectors installed on her starboard engines.

The samples of the biodiesel fuels supplied for each vessel were sent for testing and compared to the ASTM D6751 specifications (Appendix B). (The individual test reports are in Appendix C.) The specifications were all met, with the exception of the cetane number. The cetane number is a measure of the ignition delay, the time from fuel injection into the combustion chamber to ignition. Higher cetane numbers are believed to provide easier starting and quieter operation. More complete combustion and lower peak temperatures associated with higher cetane numbers are also thought to be responsible for lower NO_x emissions. ASTM D6751 calls for a minimum cetane number of 47. The test results for the *Mike Donlon* and *Pathfinder* were 46.2 and 44, respectively. The fuels for the *Raccoon* and *BD-5* had cetane numbers of 48 and 55, respectively. The fuel test results were only available after the evaluation study.

The *Mike Donlon* and *Raccoon* did not experience any observable impacts due to material compatibility issues. The *Pathfinder* and the *BD-5* experienced significant degradation to fuel hoses. Several of the *Pathfinder's* degraded fuel hoses that experienced significant degradation are shown in Figure 7. The hoses were replaced.

In another incident, the *Raccoon* was topped off with B100 and, after leaving the dock, experienced engine problems. Multiple fuel filters had to be replaced to keep the engines running. Inspection of the fuel filters revealed that they were coated with a *jelly-like* substance. The fuel provider pumped out the fuel tanks and replenished them with ULSD. After running several tank-loads of ULSD with no noticeable adverse effects on engine performance, the *Raccoon* resumed using B20. No other mechanical issues resulting from using B100 were encountered. There were no other negative experiences noted by the vessel crews and management, and the general consensus of the floating plant operators was favorable.

Figure 7. Fuel hoses degraded by B100.



3 Evaluation Study Results and Assessment

Fuel consumption

The fuel consumption results for the run tests are listed in Table 2.

Table 2. Average B100 fuel consumption compared to No.2 diesel fuel consumption for the run tests (positive numbers indicate increased B100 consumption and negative numbers indicated lower B100 consumption).

Engine	<i>Pathfinder</i> (% difference)	<i>Raccoon</i> (% difference)	<i>Mike Donlon</i> (% difference)
Port	4.8	-11.0	-1.0
Starboard	-3.9	-9.4	-1.2

Table 2 does not include the results for the *BD-5* because of problems with the FlowScans. The average gallons per hour fuel consumption rate increased for the *Pathfinder's* port engine when using biodiesel and decreased for its starboard engine. The average gallons per hour fuel consumption decreased when using biodiesel for both the port and starboard engines of the *Mike Donlon* and *Raccoon*.

Fuel consumption results for the push tests are listed in Table 3. Table 3 also does not include the results for the *BD-5* because of problems with the FlowScans. Table 3 shows that the B100 fuel consumption was greater than the No. 2 diesel fuel consumption for the *Pathfinder* at low and mid-range RPM. At mid-range RPM, B100 fuel consumption was greater for the *Raccoon's* port engine and the same for the *Raccoon's* starboard engine. For all other cases, Table 3 lists results that indicate the B100 fuel consumption was less than No. 2 diesel fuel consumption.

Table 3. Average B100 fuel consumption compared to No.2 diesel fuel consumption for the push tests (positive numbers indicate increased B100 consumption and negative numbers indicated lower B100 consumption).

Vessel	Low RPM (% difference)	Mid-Range RPM (% difference)	High RPM (% difference)
	Port Starboard	Port Starboard	Port Starboard
<i>Pathfinder</i>	5.5 2.8	2.5 10.0	-7.4 -8.0
<i>Raccoon</i>	-17.9 -16.3	5.4 0.0	-6.3 -6.3
<i>Mike Donlon</i>	-21.4 -21.4	-35.2 -31.8	-1.0 -9.4

Interpreting these results is complicated because the load points were set based on RPM and not engine power which is a function of the torque on the shaft, and because the rate at which the fuel pumps deliver fuel to the engine is also a function of engine RPM. However, it can be said that since B100 has an approximately 7% to 10% lower energy content per gallon than No. 2 diesel, a lesser fuel consumption at the same RPM when using B100 is unexpected, and lesser amounts of 20% to 30% point to insufficiently accurate measurements. LMFS was unable to measure a decrease in power due to the lower energy content of B100. This may have been due to field testing on a vessel in a dynamic (fluid) environment with constantly varied engine loads, lack of adequate sensitivity in the measuring instruments, or the higher cetane, lubricity, and cleanliness levels of B100. What was demonstrated is that for LMFS field tests, there was no noticeable operational difference in terms of vessel power between B100 and diesel.

Emissions

The results of the emissions monitoring of CO, NO_x, and CO₂ (calculated from measured oxygen, O₂, emissions) are shown in Figures 8 through 10 and listed in Table 4. In the figures, the B100 is designated as the candidate fuel, and the No. 2 diesel is the baseline fuel. Because of erroneous settings used to monitor the *Raccoon*, emissions were only analyzed for the *BD-5*, *Pathfinder*, and *Mike Donlon*. The plan called for each RPM setting to be monitored three times with only the port engine engaged and three times with only the starboard engine engaged. Due to operational problems, some settings had data for only two tests. Additional tests were conducted in cases where there were questions of valid data recording, a total of seven times at one RPM setting. In one case, with the *Pathfinder* starboard engine at low RPM using biodiesel, the data showed values clearly outside normal ranges, and they were not included in the analysis.

The data for CO₂ are plotted in Figures 8, 9, and 10. They show CO₂ emissions rising rapidly up to 10 to 15 sec into the test and then rising slightly until the end of the test at 60 sec. In the case of CO₂, the results for high, medium, and low RPM separate into three distinct regions in the plots. This was not generally true for CO and NO_x, as shown in Figure 11, where a plot of the NO_x data for the *Pathfinder* port engine shows results that cannot be clearly distinguished for each RPM setting. As a result, a complete set of plots is presented for CO₂ only.

Figure 8. CO₂ emissions for the *BD-5*.

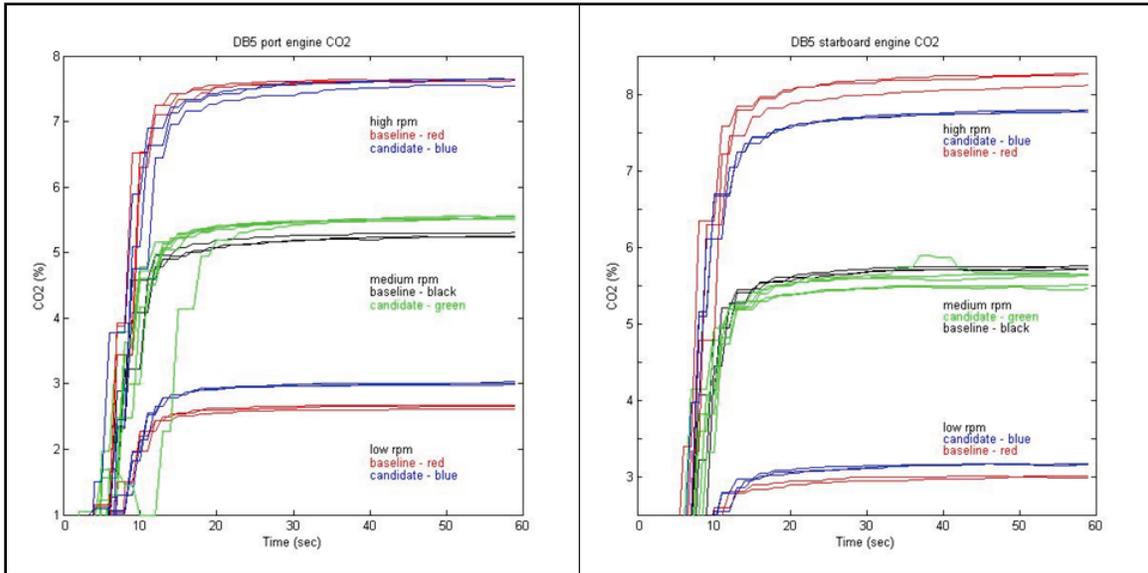


Figure 9. CO₂ emissions for the *Pathfinder*.

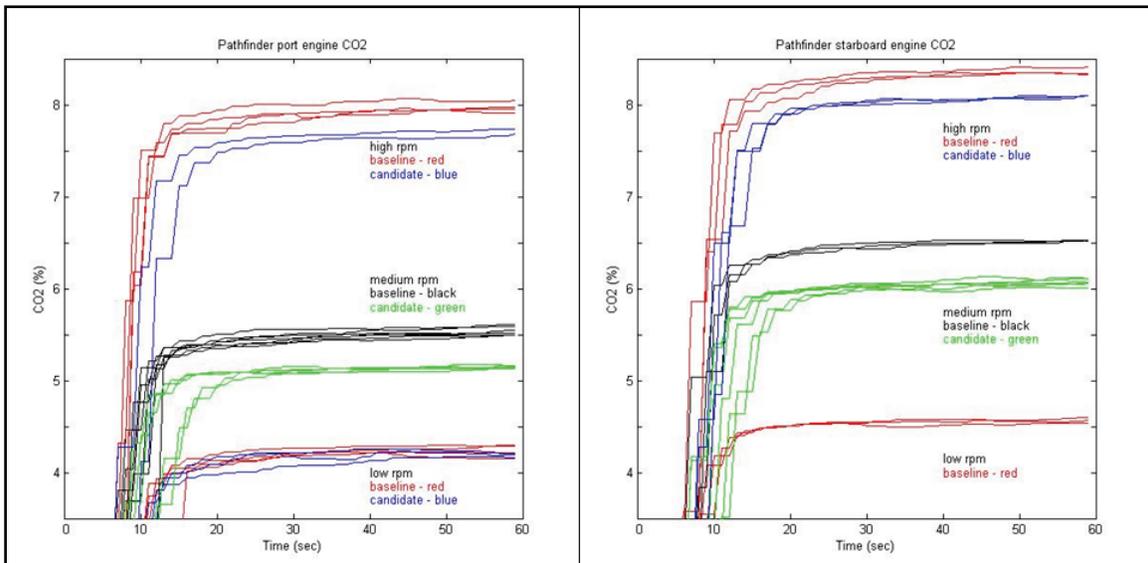


Figure 10. CO₂ emissions for the *Mike Donlon*.

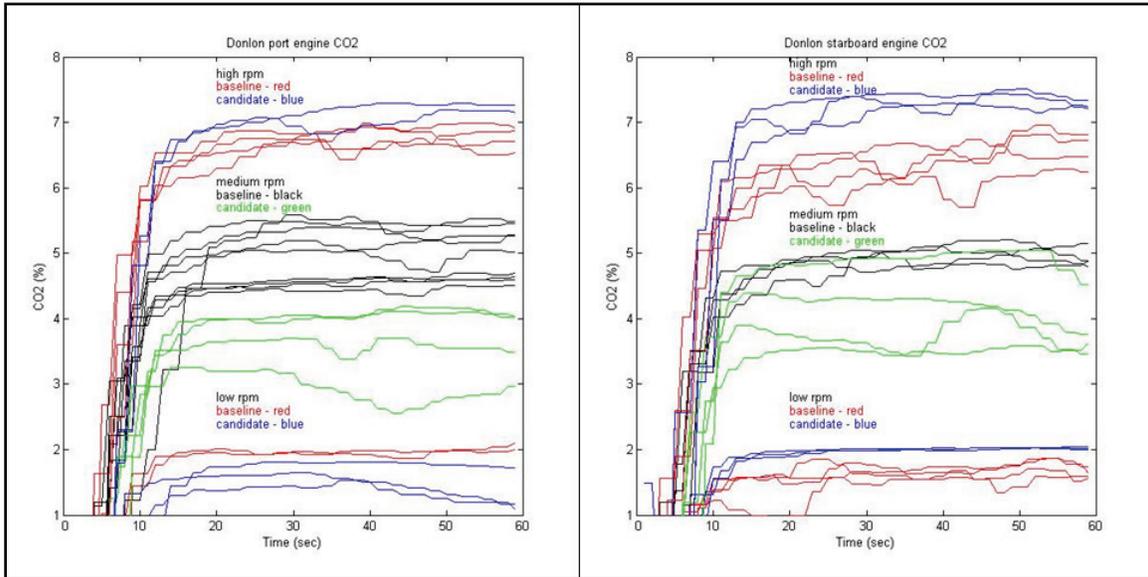


Table 4. Average emissions values (D - No. 2 diesel and B - B100) of the port and starboard engines. Units are percent volume for CO₂ and ppm for CO and NO_x.

Parameter	<i>BD-5</i>		<i>Pathfinder</i>		<i>Mike Donlon</i>	
	D	B	D	B	D	B
CO ₂						
Low RPM	2.81	3.06	4.39	4.17	1.80	1.77
Mid-range RPM	5.47	5.53	6.00	5.58	4.74	3.87
High RPM	7.88	7.64	8.12	7.86	6.56	7.20
NO _x						
Low RPM	929	807	1865	1477	244	216
Mid-range RPM	1113	1008	1964	1859	869	677
High RPM	1204	1223	1362	1771	1879	2317
CO						
Low RPM	167	298	354	557	87	166
Mid-range RPM	140	179	405	608	64	66
High RPM	85	86	482	205	75	57

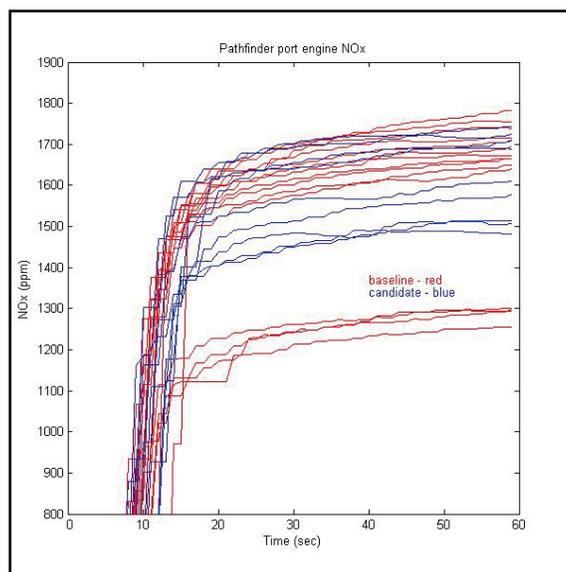
Figure 11. *Pathfinder* port engine NO_x emissions.

Table 4 lists the average of the port and starboard engine emissions for the last 30 sec of the tests for each vessel engine and RPM setting. The average for CO₂ when using diesel at low and medium RPM is higher for one vessel, lower for one vessel, and approximately the same for the third vessel. At high RPM, the average CO₂ emissions is higher when using diesel for two vessels and is lower for the third vessel. Table 4 presents higher CO emissions for biodiesel than diesel at low and medium RPM in all cases. At high RPM, the CO emissions are higher for regular diesel than for biodiesel for two vessels, and for one vessel are nearly equal. Table 4 shows NO_x emissions are higher for diesel than for biodiesel at low and medium RPM in all cases. At high RPM, the NO_x emissions are higher for biodiesel than for diesel in all cases.

Operational performance

The *Pathfinder* used B100 from March 2011 to November 2011, and the *BD-5* continued using B100 after the evaluation study and is still using it. None of the four vessels in the evaluation study had any serious mechanical problems attributable to using B100. The *Pathfinder* and the *BD-5* experienced fuel hose incompatibility degradation as a result of using biodiesel. However, after replacing the hoses, neither had any more problems with material degradation. The *BD-5* does replace its fuel filters more often now than it did when it was using No. 2 diesel. With the exception of the previously described problem of the *Raccoon's* gelled fuel tanks, there were no other issues related to engine power or efficiency, and

there were no negative effects on routine vessel operations. The *BD-5* has been using B100 for three winters in Washington, DC, and has not experienced any cold-flow problems. It is interesting to note that when the *Raccoon* filled up with #2 diesel to investigate potential performance impacts due to returning to diesel fuel from biodiesel use, no noticeable impacts were observed. In general, the crews of all the vessels were favorably impressed with the reduction in soot and the overall improved cleanliness that came with using biodiesel.

Biodiesel prices vary across the country and tend to be “slightly higher” than those for petroleum diesel (DOE 2014). While this was generally the case during the study, there were instances where the B100 was less expensive than ultra-low sulfur diesel (ULSD). For example, when the *Raccoon* switched from B100 to ULSD and then went back to B100 to investigate potential effects of changing fuels, costs varied as listed in Table 5.

Table 5. *Raccoon* diesel costs.

Vessel	Fueling Date	Biodiesel Gallons Loaded (L)	Biodiesel Cost per Gallon (At Dock)	No. 2 Diesel Gallons Loaded (L)	No. 2 Diesel Cost per Gallon (At Dock)
<i>Raccoon</i>	24 Mar 2011	700 (2650)	\$3.65		
	30 Mar 2011			648 (2453)	\$3.95
	21 Apr 2011	750 (2839)	\$3.92		

The fuel price differences of the other vessels also varied with location, but through developing a relationship with a local or regional fuel supplier, these differences can potentially be significantly reduced. The LMFS reported that they were able to negotiate contracts that provided B99.9 at a lower price than No. 2 diesel.

4 Expanded Operational Experience and Improved Testing of Emissions and Fuel Consumption

Successful results from the evaluation study led to an expanded study to evaluate biodiesel fuel usage in an increased number and more diverse types of vessels. In addition to retaining the *Raccoon*, *Pathfinder*, and *BD-5*, the additional vessels included a dustpan dredge, a hopper dredge, three towboats, three crane barges, a crew boat, and another debris-removal vessel as listed and shown in Appendix A.

The types of biodiesel used in these vessels ranged from B5 to B100, and there was also an opportunity to test a second-generation biodiesel fuel. In the earlier tests, the *Raccoon* based in California used ULSD with properties based on standards set by the California Air Resources Board (CARB), whereas the other vessels used federal ULSD with properties based on U.S. Environmental Protection Agency (EPA) standards. The second generation biodiesel tested was Solazyme fuel oil (produced from algal oils). The properties of the various fuels are listed in Table 6.

Table 6. Fuel properties.

Fuel Type	Density (kg/m ³)	Carbon Content (% by weight)	Cetane Number
Federal ULSD	835.9	86.51	46
CARB ULSD	835.9	86.51	51
Solazyme	806.5	85.47	75
B100	890.0	77.0	50

Due to its lower density, Solazyme and B100 have approximately the same energy content by volume. The main difference between Solazyme and the other fuels is its higher cetane number. The more complete combustion and lower peak temperatures associated with higher cetane numbers result in lower NO_x emissions (Velmurugan and Gowthamn 2012). Higher fuel densities have been found to produce higher NO_x emissions (McCormack 2001).

While the expanded study involved using biodiesel on 14 USACE vessels, there were differing levels of monitoring applied on different vessels. The most basic level of evaluation consisted of using biodiesel during normal operations and surveying the crew regarding their opinion on its operational suitability (e.g., delivered power, engine condition). This level was applied onboard the *Prairie du Rocher*, *Derrick No. 6*, *Kimmswick*, *Pathfinder*, *Barron*, *Fisher*, and *Sewell*. The next higher level of monitoring included the basic level previously described, in addition to the installation of the (previously described) FlowScan fuel-flow measuring system to monitor and record fuel consumption. An improvement to the FlowScan system used in the initial study consisted of the addition of an NMEA2000 Interface that allowed a variety of fuel parameters (gallons per hour, gallons consumed, gallons remaining, nautical miles per gallon, and distance to empty) to be displayed on a video screen that was typically installed on the bridge. This capability was installed aboard the *BD-6*, *Yaquina*, *Grandtower*, *Potter*, and *Raccoon*. (A screen shot is shown in Figure 12.)

Figure 12. Output of NMEA2000 Interface to FlowScan fuel-flow monitoring system.



The improved emissions monitoring (compared to the initial study) was the highest level of monitoring. It was conducted onboard the *Raccoon* and the *BD-5*. For the emissions testing, a team consisting of the USACE, the Bristol Harbor Group, and the University of California, Riverside, was formed. The Bristol Harbor Group, a naval architecture and marine engineering company located in Bristol, RI, was responsible for measurements of engine power and fuel consumption. The University of California, Riverside, Center for Environmental Research and Technology (CERT), part of the Bourns College of Engineering, conducts research in atmospheric processes, emissions from next-generation technologies and fuels, sustainable fuels, transportation systems, and solar energy, and was

responsible for developing the test strategy, making the emissions measurements, and data analysis and reporting.

Emissions and fuel consumption test procedures

Like the case for the evaluation study, the improved tests on the *BD-5* and *Raccoon* were conducted by having the vessels push against a bulkhead. The emissions sampling instrumentation was connected directly to the exhaust stacks (Figure 13).

Figure 13. Emissions testing instrumentation connected directly into the exhaust stack on the *BD-5*.



Emissions were measured while the vessels operated at target loads of 25%, 50%, 75%, and 100%, based on performance when using B100. Basing the loads on performance using B100 was chosen because, with its lower energy content, it was anticipated that 100% load using No. 2 diesel could not be achieved when using B100. Gaseous emissions of CO₂, CO, and NO_x were measured by a HORIBA Portable Gas Analyzer (PG-250). Measurements of the mass of particulate matter with sizes of 2.5 microns or less (PM_{2.5}) were made by extracting samples of raw exhaust and drawing them through a 2.5 micron cyclone separator and Teflon and quartz filters. The filters were placed in individual containers and taken to a laboratory where they were analyzed for total PM_{2.5} mass and for elemental carbon (EC) and organic carbon (OC). Additionally, for the *Raccoon*, a fast-scanning mobility particle sizer (F-SMPS) was used to measure particle size distributions.

To calculate emissions factors, accurate measurements of exhaust flow rates were needed. The more modern engines on the *Raccoon* have electronic control modules (ECM), and it was possible to use them to provide data for rpm, power, fuel consumption, and the boost pressure and temperature for the intake air. With the ECM data for the intake air, the exhaust flow rates for the *Raccoon* could be determined using the carbon balance method. The carbon balance method assumes all carbon in the fuel is burned, so the concentration of CO₂ in the exhaust, and the fuel flow rate, determine the exhaust flow rate. For the *BD-5*, a turbine flow meter installed on the air intake provided a direct measurement of the exhaust flow.

To provide consistent data methodologies for engine power and fuel consumption on the *Raccoon* and *BD-5*, Bristol installed fuel-flow meters, strain gauges, and rpm monitors to the engine shafts of the vessels. The strain gauges were bonded to the drive shafts and measured torque. Engine power was calculated from the measured torque and the rpm measurements were made from the magnetic sensors attached to the shafts. Fuel consumption measurements were made using FlowScan Instrument Company, Inc., flow meters installed in the fuel supply and return lines. Fuel consumption is the difference between the supply and return fuel rates.

Emissions and fuel consumption test results

For the *Raccoon*, unreferenced fuel consumptions (fc) and the brake-specific fuel consumptions (bsfc) are listed in Table 7. The unreferenced fuel consumptions versus engine power are plotted in Figure 14, and the brake-specific fuel consumptions at the target engine powers are plotted in Figure 15.

Table 7. Fuel consumption for the *Raccoon*.

Fuel Type	Engine Load (% of maximum)							
	25%		50%		75%		100%	
	fc (kg/hr)	bsfc (kg/kWhr)	fc (kg/hr)	bsfc (kg/kWhr)	fc (kg/hr)	bsfc (kg/kWhr)	fc (kg/hr)	bsfc (kg/kWhr)
B100	19.1	0.27	40.0	0.26	59.1	0.26	76.9	0.25
ULSD	17.8	0.25	36.4	0.24	53.7	0.24	71.4	0.23
Solazyme	18.2	0.25	37.1	0.24	53.8	0.24	71.9	0.23

Figure 14. Fuel consumption versus engine power for the *Raccoon*.


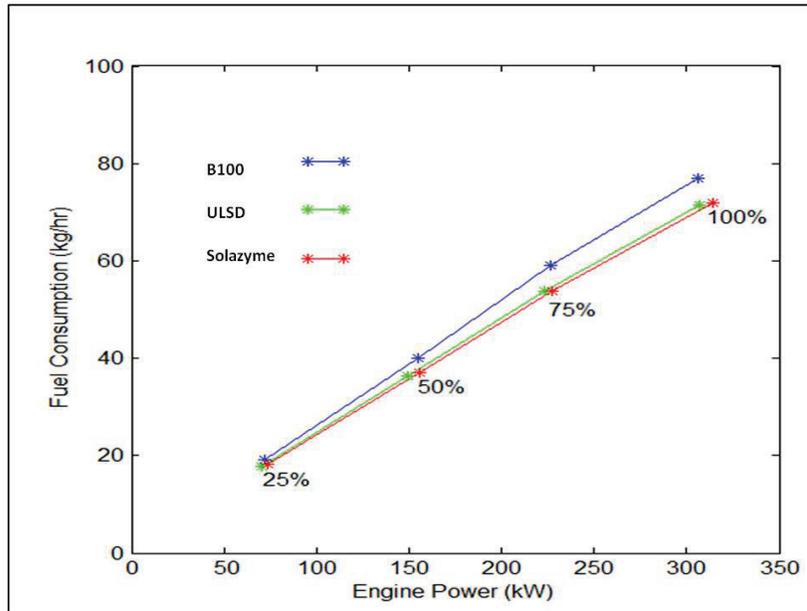


Figure 15. Brake-specific fuel consumption of B100 (blue), ULSD (green), and Solazyme (red) fuels for the *Raccoon*.

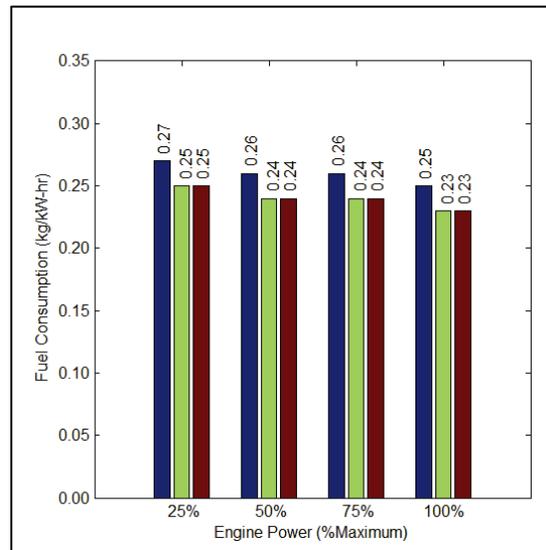

The emissions of CO₂, CO, and NO_x for the *Raccoon* are listed in Table 8 and plotted in Figures 16 through 21. The PM_{2.5} emissions are listed in Table 9, and plotted in Figures 22 and 23.

Table 8. Emissions of CO₂, CO, and NO_x for the *Raccoon*.

Engine Load (% of maximum)	CO ₂ Emissions (g/hr) (g/kWhr)		CO Emissions (g/hr) (g/kWhr)		NO _x Emissions (g/hr) (g/kWhr)	
B100						
25	56,200	782	43	0.60	736	10.23
50	117,703	758	257	1.65	1089	6.91
75	174,076	767	266	1.18	1614	7.19
100	226,713	741	708	2.32	1963	6.42
ULSD						
25	56,654	804	52	0.73	712	10.10
50	115,776	778	298	2.00	1053	7.07
75	170,938	765	408	1.83	1626	7.28
100	227,320	741	856	2.79	1879	6.13
Solazyme						
25	57,271	781	55	0.75	693	9.45
50	116,500	750	343	2.21	982	6.32
75	169,041	744	415	1.83	1541	6.78
100	226,110	719	946	3.01	1762	5.60

Figure 16. Emissions of CO₂ versus engine power for the *Raccoon*.

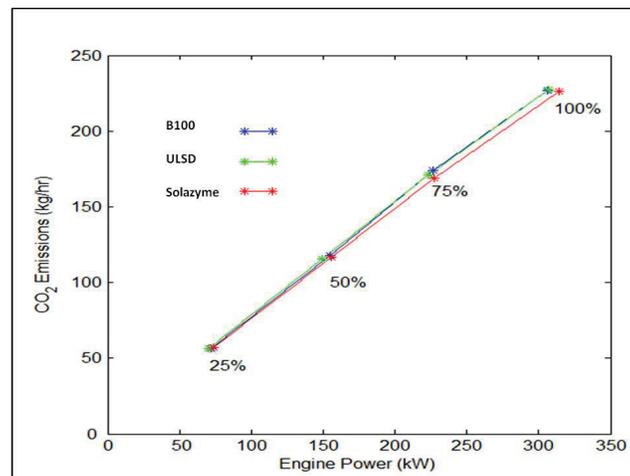


Figure 17. Emissions of CO₂ for B100 (blue), ULSD (green), and Solazyme (red) fuels for the *Raccoon*.

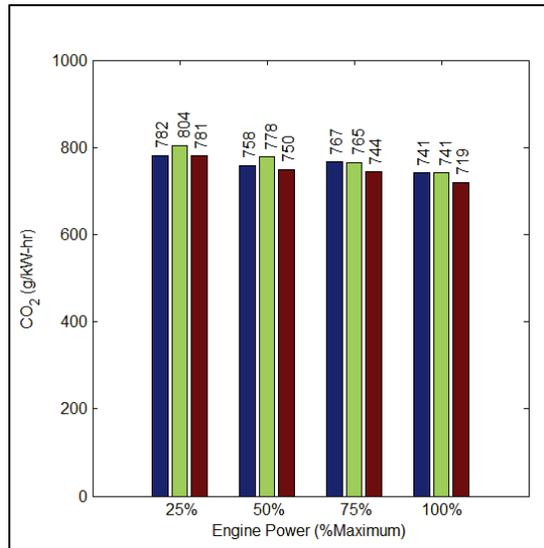


Figure 18. Emissions of CO versus engine power for the *Raccoon*.

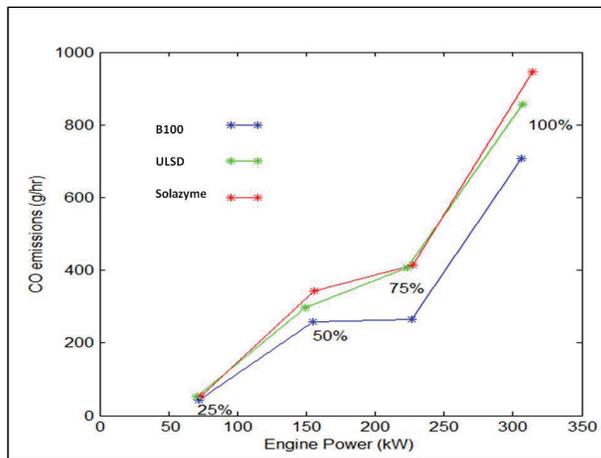


Figure 19. Emissions of CO for B100 (blue), ULSD (green), and Solazyme (red) fuels for the *Raccoon*.

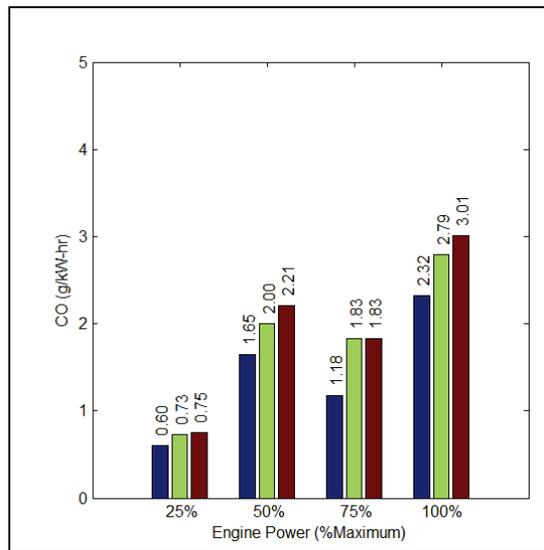


Figure 20. Emissions of NO_x versus engine power for the *Raccoon*.

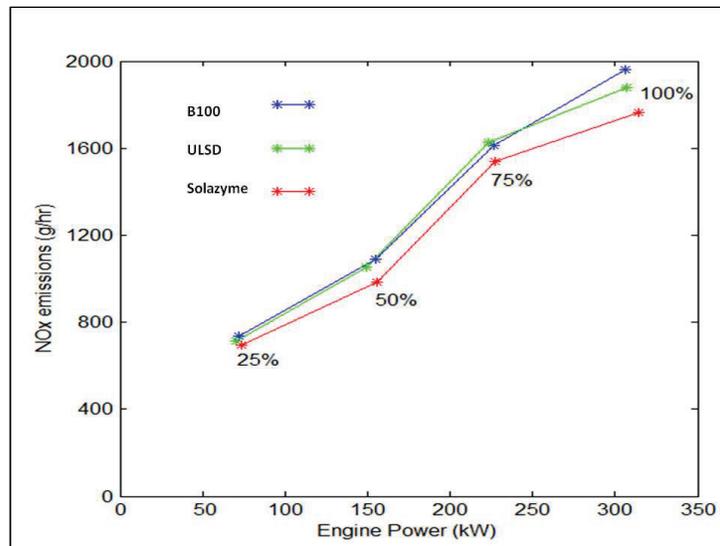


Figure 21. Emissions of NO_x for B100 (blue), ULSD (green), and Solazyme (red) fuels for the *Raccoon*.

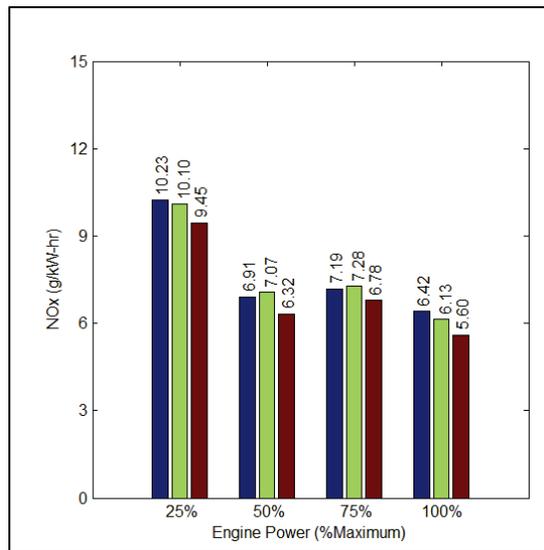


Table 9. Emissions of PM_{2.5} (g/kWhr) for the *Raccoon*.

Fuel Type	Engine Load (% of maximum)							
	25%		50%		75%		100%	
	PM _{2.5} (g/hr)	PM _{2.5} (g/kWhr)	PM _{2.5} (g/hr)	PM _{2.5} (g/kWhr)	PM _{2.5} (g/hr)	PM _{2.5} (g/kWhr)	PM _{2.5} (g/hr)	PM _{2.5} (g/kWhr)
B100	3.59	0.03	11.13	0.07	9.93	0.04	28.81	0.10
ULSD	4.53	0.05	16.73	0.11	19.63	0.09	59.66	0.26
Solazyme	4.50	0.05	16.59	0.12	18.45	0.09	64.95	0.27

Figure 22. Emissions of PM_{2.5} versus engine power for the *Raccoon*.


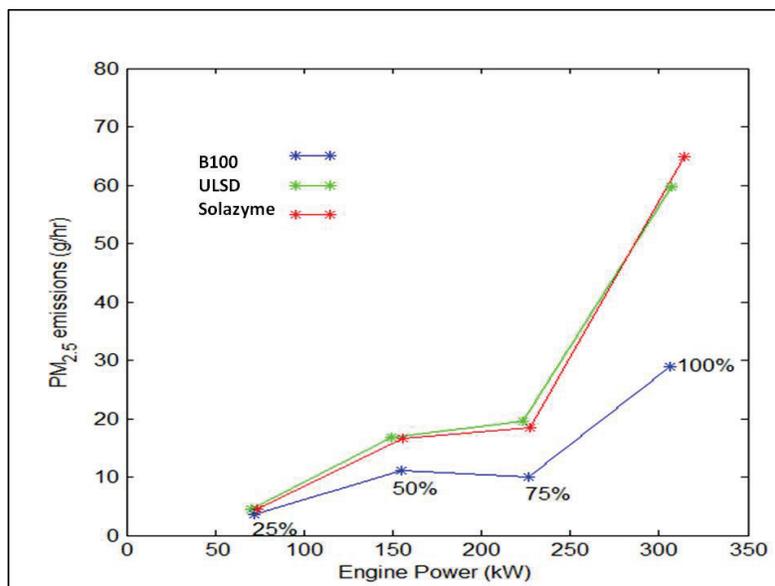


Figure 23. Emissions of PM_{2.5} for B100 (blue), ULSD (green), and Solazyme (red) fuels for the *Raccoon*.

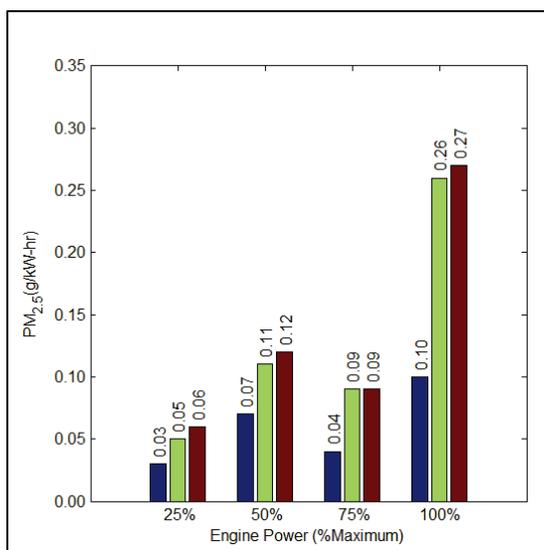

During the testing on the *BD-5*, problems developed with the strain gauges, and the measurements of strain at various operating points are unreliable. However, the RPM measurements, emission concentrations, and flow rates are believed to be accurate. Therefore, brake-specific emissions and fuel consumption at the load points are not reported for the *BD-5*. The unreferenced fuel consumption for the *BD-5* is listed in Table 10 and plotted in Figure 24. The emissions of CO₂, CO, NO_x and PM_{2.5} are listed in Table 11 and plotted in Figures 25 through 28.

Table 10. Fuel consumption for the *BD-5*.

Fuel Type	Engine Load (% of maximum)							
	25%		50%		75%		100%	
	Fc (kg/hr) port stbd		Fc (kg/hr) port stbd		Fc (kg/hr) port stbd		Fc (kg/hr) port stbd	
B100	15.3	12.9	28.9	25.4	36.6	34.7	48.4	44.8
ULSD	14.5	12.4	24.5	24.6	33.5	32.4	46.4	41.8
Solazyme	14.4	14.0	24.1	23.8	34.9	32.5	43.1	39.3

Figure 24. Fuel consumption versus engine power for the port engine (right) and the starboard engine (left) for the *BD-5*.

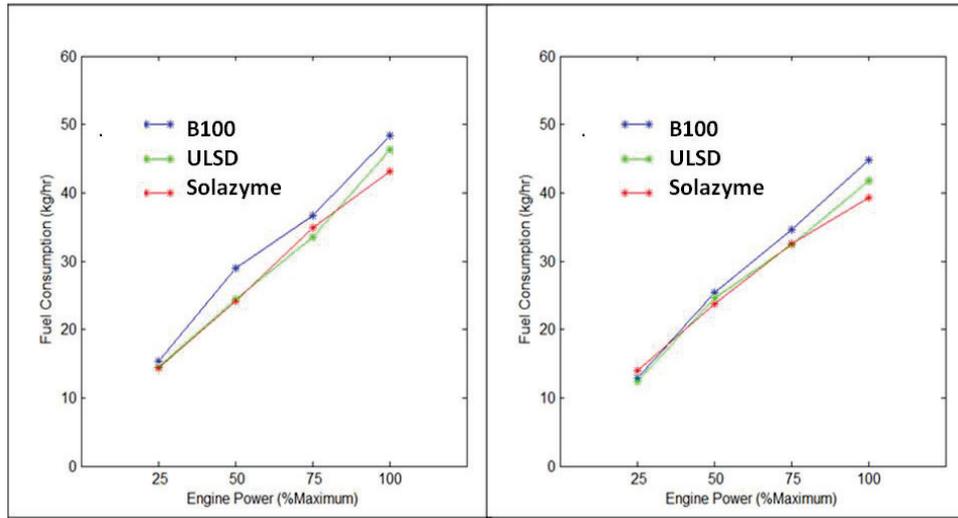


Table 11. Emissions of CO₂, CO, and NO_x and PM_{2.5} for the *BD-5*.

Engine Load (% of maximum)	CO ₂ Emissions g/hr	CO Emissions g/hr	NO _x Emissions g/hr	PM _{2.5} Emissions g/hr
B100				
25	32,946	57	433	12.42
50	70,896	74	899	8.50
75	97,042	63	1206	6.59
100	131,127	111	1482	9.44
ULSD				
25	34,160	54	379	9.79
50	63,327	93	667	19.58
75	95,393	79	984	15.41
100	133,592	141	1433	18.51
Solazyme				
25	31,969	49	317	11.22
50	62,068	84	604	16.27
75	97,745	101	873	14.22
100	135,476	190	1211	17.98

Figure 25. Emissions of CO₂ versus engine power for the *BD-5*.

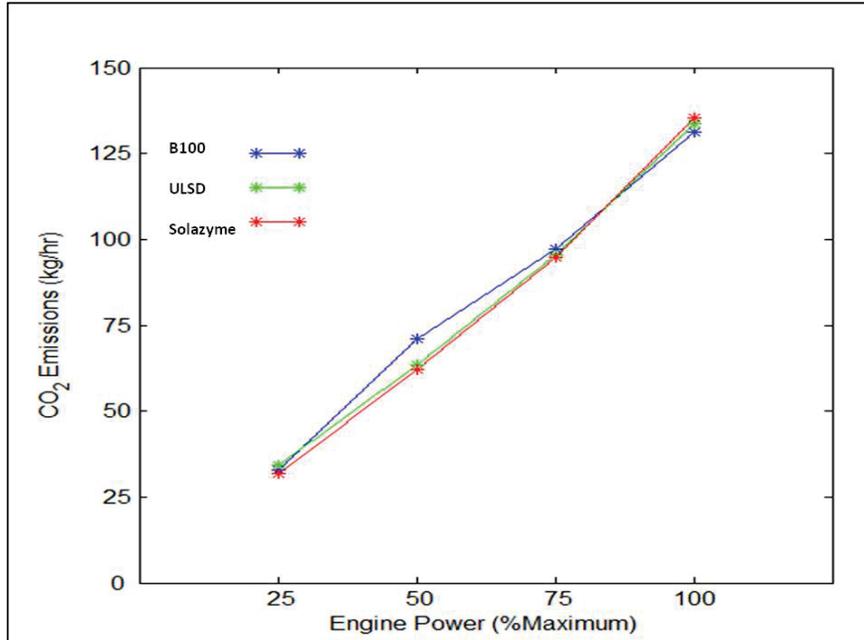


Figure 26. Emissions of CO versus engine power for the *BD-5*.

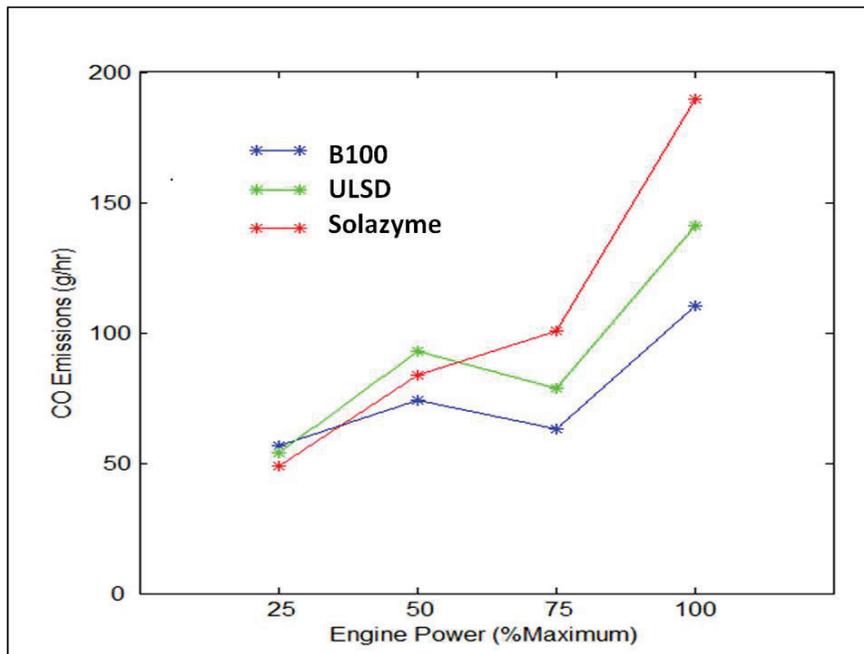
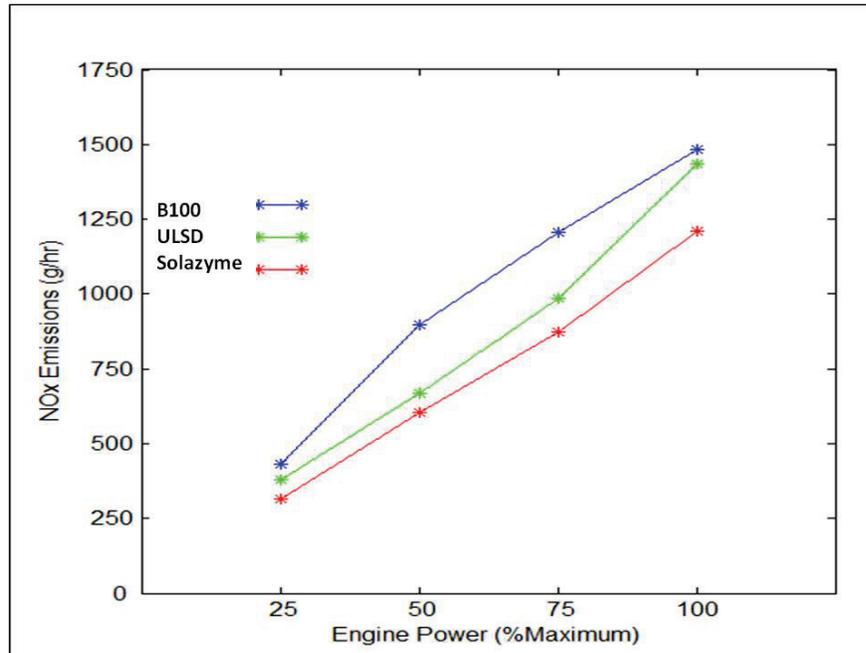
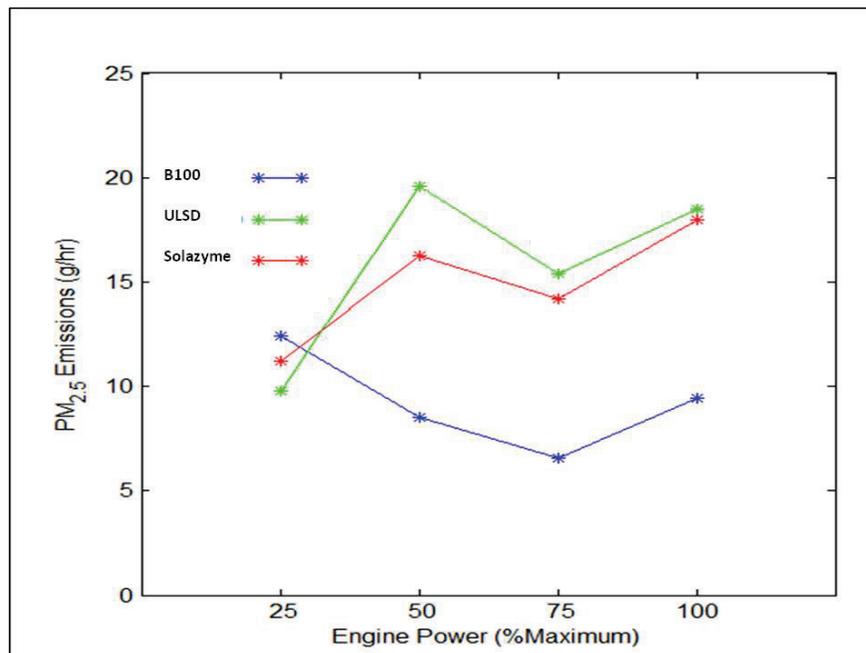


Figure 27. Emissions of NO_x versus engine power for the *BD-5*.Figure 28. Emissions of PM_{2.5} versus engine power for the *BD-5*.

For the *Raccoon*, the B100 fuel consumption was higher than the ULSD fuel consumption (Table 7 and Figures 14 and 15) by 5.5 kg/hr (100% load), 5.4 kg/hr (75% load), 3.6 kg/hr (50% load), and 1.3 kg/hr (25% load). Expressed as a percentage of the ULSD fuel consumption, the B100 fuel consumption was 7.7%, 10.1%, 9.9%, and 7.3% higher. In terms of volume,

because the B100 is denser than the ULSD, the differences in fuel consumption expressed as a percentage of the ULSD fuel consumption were 1.1%, 3.3%, 3.5%, and 0.5% higher. For the *BD-5*, the B100 fuel consumption was higher than the ULSD fuel consumption (Table 10 and Figure 15) by 2.0 kg/hr (port) and 3.0 kg/hr (stbd) (100%), 3.1 kg/hr (port) and 2.3 kg/hr (stbd) (75%), 4.4 kg/hr (port) and 0.8 kg/hr (stbd) (50%), and 0.8 kg/hr (port) and 0.5 kg/hr (stbd) (25%) kg/hr. Expressed as a percentage of ULSD, B100 fuel consumption was 4.3% and 7.2%, 0.9% and 7.1%, 18.0% and 3.3%, and 5.5% and 4.0% higher. In terms of volume, the differences in fuel consumption expressed as a percentage of ULSD fuel consumption were -2.0% and 0.7%, 2.6% and 0.5%, 10.9% and -3.2%, and -0.4% and -2.3% (positives indicate higher B100 fuel consumption and negatives indicate lower B100 fuel consumption than ULSD). With the exception of the volume difference for the *BD-5* at 50% load, which stands out as being anomalous, these results don't reflect the known approximately 10% lower energy content by volume for B100 in comparison to ULSD.

In terms of weight, the Solazyme fuel consumption for the *Raccoon* was higher than the ULSD fuel consumption (Table 7 and Figures 14 and 15) by 0.5 (100% load), 0.1 (75% load), 0.7 (50% load), and 0.4 (25% load) kg/hr. Expressed as a percentage of the ULSD fuel consumption, the Solazyme fuel consumption was 0.7%, 0.1%, 0.7%, and 0.4% higher. In terms of volume, the Solazyme fuel consumption was higher by 4.6%, 3.8%, 5.6%, and 6.0%. For the *BD-5* (Table 9 and Figure 22), the differences were -3.3 (port) and -2.5 (stbd) (100%), 1.4 (port) and 0.1 (stbd) (75%), -0.4 (port) and -0.8 (stbd) (50%), and -0.1 (port) and 1.6 (stbd) (25%) kg/hr. Expressed as a percentage of the ULSD fuel consumption the differences were -7.1% and -5.9%, 4.2% and 0.3%, -1.6% and 3.3%, and -0.7% and 12.9%. In terms of volume, the differences are -3.7 and -2.4, 7.9 and 3.8, 1.9 and 0.3, 3.1 and 17.1 (positives indicate higher Solazyme fuel consumption and negatives indicate lower Solazyme fuel consumption than ULSD).

For the *Raccoon*, the CO₂ emissions as a function of fuel type (Table 8 and Figures 16 and 17) were relatively consistent (differences less than 5%) and referenced to engine power (Figure 17), they decrease with engine load. The CO emissions (Table 8 and Figures 18 and 19) for B100 are significantly less than they are for ULSD or Solazyme, with a large reduction occurring between 50% and 75% loads. Solazyme had approximately the same CO emissions as ULSD for the 25% and 75% loads and higher CO emissions at the 50% and 100% loads. For NO_x emissions (Table 8 and Figures 20 and

21), Solazyme, with its lower density and higher Cetane number, had lower emissions than ULSD or B100 at all loads. B100 and ULSD had about the same NO_x emissions at all loads except the 100% load where B100 had higher NO_x emissions. The PM_{2.5} emissions (Table 9 and Figures 22 and 23) were significantly lower for B100 than for ULSD or Solazyme at all loads. The large reduction in PM_{2.5} can be attributed to a much lower aromatic content of B100.

For the *BD-5*, the CO₂ emissions as a function of fuel type (Table 11 and Figure 25) are within 5% of those for B100, with the exception of the difference at 50% load. The 50%-load result, which was the case for the fuel consumption, stands out as being anomalous, shows approximately 11% less CO₂ emissions for ULSD in comparison to B100, and approximately 12% less for Solazyme. The significantly less CO emissions (Table 11 and Figure 26) for B100 in comparison to ULSD and Netste for the 50%, 75%, and 100% loads for the *BD-5* agree with the results for the *Raccoon*, but unlike the *Raccoon*, the B100 CO emissions for *BD-5* at the 25% load are slightly greater than they are for ULSD and Solazyme. Solazyme had higher CO emissions than ULSD at the 75% and 100% loads and lower CO emissions for the 25% and 50% loads. Like the result for the *Raccoon*, Solazyme had lower NO_x emissions (Table 11 and Figure 27) than B100 and ULSD at all loads. The NO_x emissions were higher for B100 than they were for ULSD at all loads. The PM_{2.5} emissions (Table 11 and Figure 28) for the *BD-5* were much lower for B100 than they were for ULSD or Solazyme at the 50%, 75%, and 100% loads and higher at the 25% load.

With the exception of the anomalous results for the *BD-5* at the 50% load, these results indicate that CO₂ emissions are approximately the same, regardless of the type of fuel used, and overall, CO and PM_{2.5} emissions are lower when using B100. However, how much lower CO and PM_{2.5} emissions would be when using B100 as compared to ULSD or Solazyme, whether overall NO_x emissions would be lower or higher for B100 than for ULSD, and how much lower NO_x emissions would be for Solazyme in comparison to B100 or ULSD, all depend on the percentage of the time the vessels normally operate at the various loads.

Certification test cycles for marine vessels as defined in ISO 8178 (ISO 1996) follow the E3 test cycle that specifies operations at 100% load 20% of the time, at 75% load 50% of the time and at 50% and 25% load 15% of the time each. Overall single emissions factors for each emission (i.e., CO₂,

CO, NO_x, and PM_{2.5}) are determined by weighting the modal data according to the specified load operations and summing them. The equation used for the overall emissions factors is the sum of the weighted emissions divided by the sum of the weighted engine powers at the 25%, 50%, 75%, and 100% loads. The weighting factors are 0.15, 0.15, 0.50, and 0.20, representing the specified operations times of the engine at those loads. Table 12 lists the emissions factors for the *Raccoon*. They are not shown for the BD-5, as a result of the unreliable power measurements on that vessel.

Table 12. Weighted emissions factors for the *Raccoon* (g/kWhr).

Emission	B100	ULSD	Solazyme
CO ₂	760.4	761.2	740.1
CO	1.6	2.1	2.2
NO _x	7.1	7.1	6.5
PM _{2.5}	0.06	0.14	0.14

EPA emissions standards are based on the emissions factors listed in Table 12. The Tier 2 emissions standards do not apply to CO₂ and are 5.0 g/kWhr for CO, 7.2 g/kWhr for NO_x, and 0.11 g/kWhr for PM_{2.5}. The B100 is lower than the Tier 2 standards for all three regulated emissions. ULSD and Solazyme are lower than the Tier 2 standards for CO and NO_x but are higher than the Tier 2 standard for PM_{2.5}.

Expanded operational experience results

Operational testing of biodiesel fuel on all of the USACE vessels was evaluated by having the vessel operators fill out a questionnaire on their experiences with the fuels and report type and volume of biodiesel used. Four of the vessels used B100 (for varying lengths of time), and the others used fuels ranging from B5 to B20. During the entire duration of the study (Feb 2011–April 2014), the approximate total volume of biodiesel consumed was 3.1 million gallons. Relative proportions for the different blends were B5 – 1.34 million gallons, B10 – 178,000 gallons, B15 – 653,000 gallons, B20 – 848,000 gallons, and B100 – 43,000 gallons. The majority of the B5 consumed was used by the dredge *Yaquina*, primarily for the purpose of adding lubricity to their ULSD fuel. With the exception of the *Pathfinder* using B100 initially, The MVS vessels started out using B5 and, as experience and confidence was gained, increased their biodiesel fraction in 5% increments till a maximum blend of B20 was reached (i.e.,

5%, 10%, 15%, 20%). During the colder months the MVS primarily used B15 to mitigate cold flow issues. The *BD-5* and *BD-6* used B100 exclusively, and after having replaced the crossover fuel hoses degraded by B100 in the initial study on *BD-5*, no other negative issues were reported. The *Raccoon*, after being emissions tested with ULSD, B100, and Solazyme fuel oil, primarily used B20 over the duration of the expanded study.

In general, the crews of the vessels were favorably impressed with the reduction in soot and overall improved cleanliness that came with using biodiesel. The maintenance personnel also liked the cleaner appearance of the insides of the engines when using biodiesel, and one mentioned a potential for reduced maintenance that could result from using B100. For example, one Chief remarked “have seen an improvement in our F/O centrifuge in how long it can go before overhauls.” Several crew members also remarked on their increased sense of well being from an environmental and personal health perspective by knowing that biodiesel use reduces certain emissions and carcinogens. There were no maintenance issues associated with using biodiesel; however, all the vessels took the precaution of increasing the frequency of replacing fuel filters when they switched from ULSD to biodiesel. A subsequent gradual reduction in fuel filter change frequency was reported for several vessels, and it is assumed that the biodiesel use cleaned the varnish accumulated by prior regular diesel fuel use. None of the operators had any issues related to engine power or efficiency, and there were no negative effects on routine vessel operations. Several crews used the Flowscan fuel-flow system that, by comparing values to fuel tank soundings, can track performance of propulsion, generator, and pump engines for optimizing their respective operations, maintenance, and troubleshooting aspects. The cost of using biodiesel was reported to be comparable to that of using ULSD. NAB reported that by increasing the volume of B100 that they ordered (by adding *BD-6* fuel requirements with *BD-5*), they experienced a reduction in price per gallon.

To make realistic comparisons in the differences in emissions between the different fuels, knowledge of the normal operating conditions for the vessels are needed. USACE vessels have a wide range of operating conditions. For example, one of the vessels used in the operational tests was the MVS dustpan dredge *Potter*. They estimate that they operate the *Potter* at 25% load 20% of the time, 50% load 75% of the time, and 75% load 5% of the time. They estimate that they never operate the vessel at 100% load. Conversely, another vessel used in the operational tests was the MVS push-

tug *Grand Tower*. They estimate that they operate the *Grand Tower* at 25% and 50% loads 15% of the time each, 75% load 65% of the time, and 100% load 5% of the time. Drift collection vessels like the *Raccoon* and *BD-5* typically operate at 25% load 10% of the time, 50% load 20% of the time, 75% load 50% of the time, and 100% load 20% of the time.

5 Conclusions

Operational testing of biodiesel fuel manufactured from soybeans was conducted on 14 USACE vessels to evaluate the feasibility of using alternative fuels in USACE floating plant operations to reduce environmentally sensitive emissions, increase use of renewable energy, and reduce the use of fossil fuels. Types of vessels used in the study included a dustpan dredge, a hopper dredge, four towboats, three debris-removal vessels, three crane barges, a tug, and a crew boat. There were differing levels of monitoring applied on different vessels ranging from the most basic level of evaluation that consisted of using biodiesel during normal operations and surveying the crew regarding their opinion on its operational suitability (e.g., delivered power, engine condition), to the highest level of evaluation that consisted of installing instrumentation onboard select vessels to monitor fuel use, engine power, and levels of emissions at preselected levels of engine loading. Five of the vessels used B100 (for varying lengths of time), and the others used fuels ranging from B5 to B20. During the duration of the study (Feb 2011 through April 2014), the approximate total volume of biodiesel consumed was 3.1 million gallons, averaging approximately 9% of the total diesel fuel consumption for USACE floating plant. Relative proportions for the different blends were B5 – 1.34 million gallons, B10 – 178,000 gallons, B15 – 653,000 gallons, B20 – 848,000 gallons, and B100 – 43,000 gallons.

In general, the crews of the vessel were favorably impressed with the reduction in soot and overall improved cleanliness that came with using biodiesel. The maintenance personnel also liked the cleaner appearance of the insides of the engines when using biodiesel, and one mentioned a potential for reduced maintenance that could result from using B100. There were no significant maintenance issues associated with using biodiesel; however, all the vessels took the precaution of increasing the frequency of replacing fuel filters when they switched from ULSD to biodiesel. None of the operators had any issues related to engine power or efficiency, and with the exception of one load of biodiesel that did not meet ASTM D6751 standards, there were no negative effects on routine vessel operations. No noticeable performance impacts were observed going back and forth from diesel fuel to biodiesel use. The cost of using biodiesel was reported to be comparable to that of using ULSD, and similar to NOAA

LMFS experience, one District reported a reduction in cost per gallon of biodiesel when the volume of ordered fuel was increased. Several crews use the fuel-flow measurement system that was installed during the study to subsequently track performance of propulsion, generator, and pump engines for optimizing their respective operations, maintenance, and troubleshooting activities.

Emissions testing for CO₂, CO, NO_x, and PM_{2.5} was conducted on two USACE debris-removal vessels at 25%, 50%, 75%, and 100% engine loads with three different fuels, B100, ULSD, and Solazyme. The emissions testing showed CO₂ emissions to be approximately the same for all three fuels at the target loads. The CO emissions for B100 were significantly less than they were for ULSD or Solazyme. The NO_x emissions were generally slightly higher for B100 in comparison to ULSD and significantly higher than for Solazyme. The PM_{2.5} emissions were significantly less for B100 in comparison to ULSD and Solazyme, except at the 25% load on one of the vessels where they were slightly higher. Solazyme, with its higher cetane number, had the lowest NO_x emissions.

Fuel consumption was measured during the emissions testing. It was expected that the approximately 10% lower energy content of a gallon of B100 in comparison to a gallon of ULSD would mean a 10% increase in fuel consumption of B100 at the load points. However, the measurements didn't show this result. For one of the vessels, the B100 fuel consumption was measured to be approximately an average 2% higher than ULSD. For the other vessels, the average B100 consumption was approximately 1% lower after an anomalous measurement at 50% load was excluded.

Emissions factors as defined in ISO 8178 (ISO 1996) were calculated from the emissions measurements. It was found that B100 was lower than the EPA Tier 2 standards for all three regulated emissions (i.e., CO, NO_x, PM_{2.5}). The ULSD and Solazyme were lower than the Tier 2 standards for CO and NO_x but higher than the Tier 2 standard for PM_{2.5}.

This study successfully demonstrated that the use of certified biodiesel fuel (including biodiesel manufactured from soybeans and from algal oils), by suitable USACE floating plants, is feasible to reduce select environmentally sensitive emissions, increase USACE use of renewable energy, and reduce the use of fossil fuels. All of the Districts that participated in the expanded study intend to continue their respective use of biodiesel fuel.

References

- Council on Environmental Quality. 2009. *Federal leadership in environmental, energy and economic performance*. Executive Order 13514. Washington, DC. <https://www.whitehouse.gov/administration/eop/ceq/sustainability>
- International Organization for Standardization (ISO). 1996. *Reciprocating internal combustion engines—Exhaust emission measurement*. ISO 8178, 1st edition, 1996-08-15. Geneva, Switzerland.
- U.S. Department of Energy (DOE). 2003. *Just the basics*. Washington, DC: Office of Energy Efficiency and Renewable Energy. www1.eere.energy.gov/vehiclesandfuels/pdfs/basics/jtb_diesel_engine.pdf
- _____. 2014. *Energy efficiency & renewable energy*. Washington, DC: U.S. Department of Energy. <http://www.fueleconomy.gov/feg/biodiesel.shtml>
- Velmurugan, K., and S. Gowthamn. 2012. Effect of cetane improver additives on emissions. *International Journal of Modern Engineering Research* 2(5):3372–3375.

Appendix A: Vessels in Expanded Study

Table A1. Expanded operational testing and biodiesel evaluation study of floating plant equipment descriptions.

Location	District	Vessel	Dredge Pump	Propulsion	Generator
Washington, DC Debris Unit	NAB	<i>BD-6</i> (11 m) drift collection vessel, 1991, fuel cap, 1,892 L (500 gal)		(2) Caterpillar 3208	1 Yanmar, YDG 3700EV -Engine Model # L100EE-DEGLE
St. Louis, MO Base Yard	MVS	<i>Grandtower</i> (20 m) towboat, 2000, fuel cap. 35,200 L (9,300 gal)		2 Caterpillar 3406E	(2) John Deere 4045TFM
St. Louis, MO Base Yard	MVS	<i>Dustpan Dredge Potter</i> , (74 m) 1932, fuel cap. 113,550 L (30,000 gal)		Electric motor 2 Caterpillar 3406E	3 Caterpillar 3516B(2) John Deere 4045TFM
Portland District Moorings	NWP	<i>Hopper Dredge Yaquina</i> 61 m 1981	2 Caterpillar D-379	2 Tier II MTU 8V4000 M60	Two Tier II MTU 12V2000 P82
St. Louis, MO Base Yard	MVS	<i>Derrick No. 6</i> , Crane Barge 21 (m) 2006, fuel cap. 5,830 L (1,450 gal)	2 Caterpillar D-379	2 Tier II MTU 8V4000 M60	Main Generator John Deer 45T100-5000 Auxiliary Generator John Deer 45D71-5000 Two Tier II MTU 12V2000 P82
St. Louis, MO Base Yard	MVS	<i>Prairie du Rocher</i> , Towboat (16 m) 2002, fuel cap. 4,920 L (1,300 gal)		(2) Cat 3406E	(2) John Deere 4045TFM Main Generator John Deer 45T100-5000
St. Louis, MO Base Yard	MVS	<i>Kimmswick</i> , Towboat (16 m) 2006, fuel cap. 4,920 L (1,300 gal)		(2)Cat C18(2) Cat 3406E	(2) John Deere T04045DFM(2) John Deere 4045TFM
St. Louis, MO Base Yard	MVS	<i>Barron</i> , Crewboat, (11 m) 1998, fuel cap. 1,514 L (400 gal)		2 - Caterpillar model 3116, in line 6, turbocharged(2)Cat C18	Northern Lights model BKW-PX-6-303(2) John Deere T04045DFM

Location	District	Vessel	Dredge Pump	Propulsion	Generator
St. Louis, MO Base Yard	MVS	<i>Fisher</i> , Crane Barge 48 (m) 1999, fuel cap. 11,355 L (3,000 gal)		2 – Caterpillar model 3116, in line 6, turbocharged	Northern Lights model BKW-PX-6-303
St. Louis, MO Base Yard	MVS	<i>Sewell</i> , Crane Barge 60 (m) 1985, fuel cap. 7,570 L (2,000 gal)			2 – Detroit Diesel, 16V-71T

Figure A1. U.S. Army Engineer District Baltimore (NAB) drift collection vessel *BD-6*.



Figure A2. U.S. Army Engineer District St. Louis (MVS) dustpan dredge *Potter*.



Figure A3. U.S. Army Engineer District Portland (NWP) hopper dredge *Yaquina*.



Figure A4. U.S. Army Engineer District St Louis (MVS) towboat *GrandTower*.



Figure A5. U.S. Army Engineer District St Louis (MVS) towboat *Prairie du Rocher*.



Figure A6. U.S. Army Engineer District St Louis (MVS) towboat *Kimmswick*.



Figure A7. U.S. Army Engineer District St Louis (MVS) crane barge *Fisher*.



Figure A8. U.S. Army Engineer District St Louis (MVS) crane barge *Sewell*.



Figure A9. U.S. Army Engineer District St Louis (MVS) crewboat *Barron*.



Figure A10. U.S. Army Engineer District St Louis (MVS) crane barge Derrick Number 6.



Appendix B: ASTM D6751



SPECIFICATION FOR BIODIESEL (B100) – ASTM D6751-09

Nov. 2008

Biodiesel is defined as the mono alkyl esters of long chain fatty acids derived from vegetable oils or animal fats, for use in compression-ignition (diesel) engines. This specification is for pure (100%) biodiesel prior to use or blending with diesel fuel. #

Property	ASTM Method	Limits	Units
Calcium & Magnesium, combined	EN 14538	5 maximum	ppm (ug/g)
Flash Point (closed cup)	D 93	93 minimum	degrees C
Alcohol Control (One of the following must be met)			
1. Methanol Content	EN14110	0.2 maximum	% mass
2. Flash Point	D93	130 minimum	Degrees C
Water & Sediment	D 2709	0.05 maximum	% vol.
Kinematic Viscosity, 40 C	D 445	1.9 - 6.0	mm ² /sec.
Sulfated Ash	D 874	0.02 maximum	% mass
Sulfur			
S 15 Grade	D 5453	0.0015 max. (15)	% mass (ppm)
S 500 Grade	D 5453	0.05 max. (500)	% mass (ppm)
Copper Strip Corrosion	D 130	No. 3 maximum	
Cetane	D 613	47 minimum	
Cloud Point	D 2500	report	degrees C
Carbon Residue 100% sample	D 4530*	0.05 maximum	% mass
Acid Number	D 664	0.50 maximum	mg KOH/g
Free Glycerin	D 6584	0.020 maximum	% mass
Total Glycerin	D 6584	0.240 maximum	% mass
Phosphorus Content	D 4951	0.001 maximum	% mass
Distillation, T90 AET	D 1160	360 maximum	degrees C
Sodium/Potassium, combined	EN 14538	5 maximum	ppm
Oxidation Stability	EN 14112	3 minimum	hours
Cold Soak Filtration	Annex to D6751	360 maximum	seconds
For use in temperatures below -12 C	Annex to D6751	200 maximum	seconds

BOLD = BQ-9000 Critical Specification Testing Once Production Process Under Control

* The carbon residue shall be run on the 100% sample.

A considerable amount of experience exists in the US with a 20% blend of biodiesel with 80% diesel fuel (B20). Although biodiesel (B100) can be used, blends of over 20% biodiesel with diesel fuel should be evaluated on a case-by-case basis until further experience is available.

Appendix C: B100 Test Results

		BTS NV 1711 Orbit Way, Bldg 2 Minden, NV 89423 TEL: 775-783-4660 FAX: 775-783-4648		Profile Code USACE-MS Profile ID 5424			
				Attention Of Tim Welp Company US Army Corps of Engineers ERDC End User			
Taken	11-Apr-2011	Tested	22-Apr-2011	Sample	46746	Unit ID	TUG-DONLON
Entered	20-Apr-2011	Reported	03-May-2011	Lab Batch	4800	Sample Details	
Test Pkg	6751					Fuel Type	Biodiesel Fuel
Sample Note:							
Test Name	Test Method		Limit	Result	Status		
Free Glycerin (mass %)	ASTM D6584		MAX 0.020	0.011	PASS		
Monoglycerides (mass %)	ASTM D6584		N/A	0.000	N/A		
Diglycerides (mass %)	ASTM D6584		N/A	0.000	N/A		
Triglycerides (mass %)	ASTM D6584		N/A	0.000	N/A		
Total Glycerin (mass %)	ASTM D6584		MAX 0.240	0.011	PASS		
Flash Point, Closed Cup (°C)	ASTM D 93		MIN 130 *	180	PASS		
Methanol Content (wt %)	EN 14110		MAX 0.20				
Phosphorous (ppm)	ASTM D4951		MAX 10	0.1	PASS		
Calcium + Magnesium (ppm)	EN 14538		MAX 5	CA-0.2+MG-0=0.2	PASS		
Sodium + Potassium (ppm)	EN 14538		MAX 5	NA-0.4+K-0.2=0.6	PASS		
Water & Sediment (vol %)	ASTM D2709		MAX 0.050	0	PASS		
KF Water (ppm)	ASTM D6304		N/A				
Sulfur, by UV (ppm)	ASTM D5453		MAX 15	0	PASS		
Sulfur, by XRF (ppm)	ASTM D4294		MAX 15				
TAN (mg KOH/g)	ASTM D664		MAX 0.50	0.13	PASS		
Viscosity @ 40 °C (cSt)	ASTM D445		1.9 - 6.0	4.17	PASS		
Oxidation Stability by Rancimat (hrs)	EN14112		MIN 3.00	11.59	PASS		
Oxidation Stability Index, Time (hrs)	AOCS Cd 12b-92		N/A				
Oxidation Stability Index, Temp (°C)	AOCS Cd 12b-92		N/A				
Sim. Dist., 50% Recovery (°C)	ASTM D2887		N/A				
Sim. Dist., 90% Recovery (°C)	ASTM D2887		N/A				
Dist. Temp, 90% Recovery (°C)	ASTM D1160		MAX 360	353	PASS		
Cetane Index	ASTM D976		N/A				
Cetane Number	ASTM D613		MIN 47	46.2	FAIL		
API Gravity @ 15.6 °C (°API)	ASTM D1298		N/A				
Cloud Point (°C)	ASTM D2500		N/A	-1	N/A		
Pour Point (°C)	ASTM D97		N/A				
Cold Soak Filterability, Time (sec)	ASTM D6751 Annex A1		MAX 360	99	PASS		
Cold Soak Filterability, Contamination (mg/L)	D6751 Annex A1 Mod		N/A				
Cold Filter Plug Point (°C)	ASTM D6371		N/A				
Sulfated Ash (wt %)	ASTM D874		MAX 0.020	< 0.005	PASS		
Carbon Residue, MicroMethod 100% (wt %)	ASTM D4530		MAX 0.050	< 0.050	PASS		
Copper Corrosion, 3h @ 50°C (rating)	ASTM D130		MAX 3A	1a	PASS		
Fatty Acid Methyl Ester Content (%BIO)	ASTM D7371		N/A				
Visual Inspection	ASTM D4176						
<p>* If Flash Point is between 93 °C and 129 °C, Methanol Content (MC) must be tested. MC result must be lower than 0.20 (wt%) to PASS.</p>							
CERTIFICATE OF ANALYSIS Meets Testing Requirements of ASTM D 6751.							



BTS NV
1711 Orbit Way, Bldg 2
Minden, NV 89423
TEL: 775-783-4660
FAX: 775-783-4648

Profile Code	USACE-MS	Profile ID	5424
Attention Of	Tim Welp		
Company	US Army Corps of Engineers ERDC		
End User			

Taken	20-Apr-2011	Tested	09-May-2011	Sample	47192	Unit ID	PATHFINDER
Entered	29-Apr-2011	Reported	09-May-2011	Lab Batch	4892	Sample Details	
Test Pkg	6751			Fuel Type		Biodiesel Fuel	

Sample Note: SULU is only accurate to around 1. ----FRB 2-5

Test Name	Test Method	Limit	Result	Status
Free Glycerin (mass %)	ASTM D6584	MAX 0.020	0.002	PASS
Monoglycerides (mass %)	ASTM D6584	N/A	0.077	N/A
Diglycerides (mass %)	ASTM D6584	N/A	0.033	N/A
Triglycerides (mass %)	ASTM D6584	N/A	0.014	N/A
Total Glycerin (mass %)	ASTM D6584	MAX 0.240	0.125	PASS
Flash Point, Closed Cup (°C)	ASTM D 93	MIN 130 *	150.5	PASS
Methanol Content (wt %)	EN 14110	MAX 0.20		
Phosphorous (ppm)	ASTM D4951	MAX 10	2	PASS
Calcium + Magnesium (ppm)	EN 14538	MAX 5	CA-0+MG-0=0	PASS
Sodium + Potassium (ppm)	EN 14538	MAX 5	NA-0+K-0=0	PASS
Water & Sediment (vol %)	ASTM D2709	MAX 0.050	0	PASS
KF Water (ppm)	ASTM D6304	N/A		
Sulfur, by UV (ppm)	ASTM D5453	MAX 15	0.44	PASS
Sulfur, by XRF (ppm)	ASTM D4294	MAX 15		
TAN (mg KOH/g)	ASTM D664	MAX 0.50	0.24	PASS
Viscosity @ 40 °C (cSt)	ASTM D445	1.9 - 6.0	4.10	PASS
Oxidation Stability by Rancimat (hrs)	EN14112	MIN 3.00	12.75	PASS
Oxidation Stability Index, Time (hrs)	AOCS Cd 12b-92	N/A		
Oxidation Stability Index, Temp (°C)	AOCS Cd 12b-92	N/A		
Sim. Dist., 50% Recovery (°C)	ASTM D2887	N/A		
Sim. Dist., 90% Recovery (°C)	ASTM D2887	N/A		
Dist. Temp, 90% Recovery (°C)	ASTM D1160	MAX 360	358	PASS
Cetane Index	ASTM D976	N/A		
Cetane Number	ASTM D613	MIN 47	44	FAIL
API Gravity @ 15.6 °C (°API)	ASTM D1298	N/A		
Cloud Point (°C)	ASTM D2500	N/A	-1	N/A
Pour Point (°C)	ASTM D97	N/A		
Cold Soak Filterability, Time (sec)	ASTM D6751 Annex A1	MAX 360	95	PASS
Cold Soak Filterability, Contamination (mg/L)	D6751 Annex A1 Mod	N/A		
Cold Filter Plug Point (°C)	ASTM D6371	N/A		
Sulfated Ash (wt %)	ASTM D874	MAX 0.020	< 0.005	PASS
Carbon Residue, MicroMethod 100% (wt %)	ASTM D4530	MAX 0.050	< 0.050	PASS
Copper Corrosion, 3h @ 50°C (rating)	ASTM D130	MAX 3A	1a	PASS
Fatty Acid Methyl Ester Content (%BIO)	ASTM D7371	N/A		
Visual Inspection	ASTM D4176			

* If Flash Point is between 93 °C and 129 °C, Methanol Content (MC) must be tested. MC result must be lower than 0.20 (wt%) to PASS.

CERTIFICATE OF ANALYSIS
Meets Testing Requirements of ASTM D 6751.



BTS NV
1711 Orbit Way, Bldg 2
Minden, NV 89423
TEL: 775-783-4660
FAX: 775-783-4648

Profile Code	USACE-MS	Profile ID	5424
Attention Of	Tim Welp		
Company	US Army Corps of Engineers ERDC		
End User			

Taken	09-Jun-2011	Tested	21-Jun-2011	Sample	49294	Unit ID	RACCOON-BLUE-SKY
Entered	14-Jun-2011	Reported	27-Jun-2011	Lab Batch	5249	Sample Details	
Test Pkg	6751					Fuel Type	Blodiesel Fuel

Sample Note:

Test Name	Test Method	Limit	Result	Status
Free Glycerin (mass %)	ASTM D6584	MAX 0.020	0.001	PASS
Monoglycerides (mass %)	ASTM D6584	N/A	0.070	N/A
Diglycerides (mass %)	ASTM D6584	N/A	0.018	N/A
Triglycerides (mass %)	ASTM D6584	N/A	0.006	N/A
Total Glycerin (mass %)	ASTM D 6584	MAX 0.240	0.095	PASS
Flash Point, Closed Cup (°C)	ASTM D93	MIN 130	169	PASS
Phosphorous (ppm)	ASTM D4951	MAX 10	0	PASS
Calcium + Magnesium (ppm)	EN 14538	MAX 5	CA-0.2+MG-0.1=0.3	PASS
Sodium + Potassium (ppm)	EN 14538	MAX 5	NA-0.1+K-0=0.1	PASS
Water & Sediment (vol %)	ASTM D2709	MAX 0.050	0	PASS
Sulfur, by UV (ppm)	ASTM D5453	MAX 15	2.84	PASS
TAN (mg KOH/g)	ASTM D664	MAX 0.50	0.16	PASS
Viscosity @ 40° C (cSt)	ASTM D445	1.9 - 6.0	5.00	PASS
Oxidation Stability of Diesel Fuels (hrs)	EN15751	MIN 3.00	8.2	PASS
Dist. Temp., 90% Recovery (°C)	ASTM D1160	MAX 360	359	PASS
Cetane Number	ASTM D613	MIN 47	48	PASS
Cloud Point (°C)	ASTM D2500	N/A	1	N/A
Cold Soak Filterability, Time (sec)	ASTM D7501	MAX 360	110	PASS
Sulfated Ash (wt %)	ASTM D874	MAX 0.020	<0.005	PASS
Carbon Residue, MicroMethod 100% (wt %)	ASTM D4530	MAX 0.050	< 0.05	PASS
Copper Corrosion, 3h @ 50°C (rating)	ASTM D130	MAX 3A	1a	PASS

* If Flash Point is between 93 °C and 129 °C, Methanol Content (MC) must be tested. MC result must be lower than 0.20 (wt%) to PASS.

CERTIFICATE OF ANALYSIS
Analysis Meets Testing Requirements of ASTM D 6751.

PETER CREMER

NORTH AMERICA, LP

NEXSOL BD-99.9 BIODIESEL

ASTM D 6751 (EPA 4627)

Lot #: PN027311043

Property	ASTM Method	Limits	Results
Flash Point	D93	93°C min	>150°C
Water & Sediment	D2709	0.050% vol. max	<0.025
Kinematic Viscosity, 40° C	D445	1.9-6.0 mm ² /sec.	4.0
Sulfated Ash	D874	0.020% mass max	<0.005
Sulfur	D5453	15ppm max	< 1
Copper Strip Corrosion	D130	No. 3 max	1a
Cetane	D613	47 min.	55
Cloud Point	D2500	Report to customer	0°C
Carbon Residue, 100% sample	D4530	0.050% mass max	<0.001
Acid Number	D664	0.50mg KOH/gm max	0.16
Free Glycerin	D6584	0.020% mass max	0.012
Monoglycerides	D6584	0.8% (m/m) max	0.100
Diglycerides	D6584	0.2% (m/m) max	0.050
Triglycerides	D6584	0.2% (m/m) max	0.050
Total Glycerin	D6584	0.240% mass max	0.050
Phosphorus Content	D4951	0.001% mass max	0.000
Distillation temp., atmospheric equiv. temp., 90% recovered	D1160	360 °C max	352° C
Sodium & Potassium Metals	EN 14538	5ppm max combined	<1.0
Calcium & Magnesium Metals	EN 14538	5ppm max combined	< 1.0
Oxidation Stability	EN 15751	3 hours min	6
Visual Inspection	D 4176 (#2)	2 max	1
Cold Soak Filtration	D6751 Appendix	360 seconds max ¹	91
Water Content by Karl Fisher	D6304	500ppm	42

¹ B100 (or B99.9) intended for blending into diesel fuel that is expected to give satisfactory vehicle performance at fuel temperatures at or below -12°C shall comply with a cold soak filterability limit of 200 seconds maximum.

Customer	MARION	Invoice #:	BL-273014
Customer PO#:		Ship Date:	4-11-11
Quantity	7,000 GALLONS	Seals	

Andrea Henderson

Signature Date 03/14/11

Andrea Henderson QC Laboratory Analyst
Name Position
Shipping Location: Peter Cremer North America, LP, Cincinnati, OH

This analysis is not to be construed as a warranty. Customer is responsible to verify the lot and code numbers of product received with the numbers contained on this report and perform any other analyses necessary to determine suitability of the product described above for the use intended by the customer.

"Peter Cremer North America, LP is a registered BQ-9000[®] Producer and Marketer"



3117 Southside Avenue • Cincinnati, OH 45204
• (513) 471-7200 • Fax (513) 244-7775
Toll Free (877) 901-7262

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE July 2016		2. REPORT TYPE Technical Report		3. DATES COVERED (From - To) Oct 2010 – Jan 2015	
4. TITLE AND SUBTITLE Evaluation of Biodiesel Fuels to Reduce Fossil Fuel Use in Corps of Engineers' Floating Plant Operations				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Michael Tubman, Timothy Welp, Ryan Immel, and Robert Leitch				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER 456009	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Corps of Engineers Engineer Research and Development Center 3909 Halls Ferry Road Vicksburg MS, 39180				8. PERFORMING ORGANIZATION REPORT NUMBER ERDC/CHL TR-16-11	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers Washington, DC 20314-1000				10. SPONSOR/MONITOR'S ACRONYM(S) HQUSACE	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT A study to evaluate the feasibility of using biodiesel fuel in U.S. Army Corps of Engineers (USACE) floating plant operations to reduce environmentally sensitive emissions, increase use of renewable energy, and reduce the use of fossil fuels was conducted with funding from the U.S. Army Corps of Engineers (USACE) Dredging Operations and Environmental Research (DOER) program and the USACE Sustainability and Energy Efficiency Program. This study was conducted by the USACE Engineer Research and Development Center (ERDC) and the USACE Marine Design Center (MDC), in conjunction with support of USACE Headquarters (HQUSACE) and participating USACE Districts. The study began in 2010 with a focus on the methodology to convert four working USACE vessels to biodiesel. Favorable results in regards to mechanical and operational issues cleared the way for evaluating biodiesel on additional vessels. Fourteen vessels were converted to biodiesel use in the expanded study, and additional tests of emissions and fuel usage were conducted on two vessels. This report describes the study that successfully demonstrated that use of certified biodiesel fuel (including biodiesel manufactured from soybeans and from algal oils) by suitable USACE floating plants is feasible to reduce select environmentally sensitive emissions, increase USACE use of renewable energy, and reduce the use of fossil fuels.					
15. SUBJECT TERMS Biodiesel fuels Energy consumption			Fuel consumption Greenhouse gas mitigation Marine engines – Exhaust gas		Renewable energy sources Soybeans Sustainability
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 60	19a. NAME OF RESPONSIBLE PERSON Timothy Welp
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) 601-634-2083