

AD-A011 942

SINGER: A COMPUTER CODE FOR GENERAL ANALYSIS OF TWO-DIMENSIONAL REINFORCED CONCRETE STRUCTURES.
VOLUME 1. SOLUTION PROCESS

S. M. Holzer, et al

Virginia Polytechnic Institute and
State University

Prepared for:

Air Force Weapons Laboratory
Defense Nuclear Agency

May 1975

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE

198045

AFWL-TR-74-228, Vol. I

AFWL-TR-
74-228
Vol. I

AD A011942



SINGER: A COMPUTER CODE FOR GENERAL ANALYSIS OF TWO-DIMENSIONAL CONCRETE STRUCTURES

**Volume I
Solution Process**

**S. M. Holzer
R. J. Melosh
R. M. Barker
A. E. Somers**

May 1975

Final Report for Period August 1972 - August 1974

Approved for public release; distribution unlimited.

Reproduction of this
document is authorized
by the National Technical
Information Service
under the terms of the
Government of the United States of America
Copyright, 1975

**Prepared by
DEPARTMENT OF CIVIL ENGINEERING
Virginia Polytechnic Institute and State University
Blacksburg, Virginia**

**AIR FORCE WEAPONS LABORATORY
Air Force Systems Command
Kirtland Air Force Base, NM 87117**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFWL-TR-74-228, Vol 1	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SINGER. A COMPUTER CODE FOR GENERAL ANALYSIS OF TWO-DIMENSIONAL REINFORCED CONCRETE STRUCTURES Volume 1, SOLUTION PROCESS		5. TYPE OF REPORT & PERIOD COVERED Final Report: August 1972 - August 1974
7. AUTHOR(s) S. M. Holzer, R. J. Melosh, R. M. Barker, A. E. Somers		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of Civil Engineering Virginia Polytechnic Institute & State University Blacksburg, Virginia		8. CONTRACT OR GRANT NUMBER(s) F29601-73-C-0022
11. CONTROLLING OFFICE NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Element: 62704H Project: 5710, WDNS 3414
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Air Force Weapons Laboratory Kirtland Air Force Base, NM 87117		12. REPORT DATE May 1975
		13. NUMBER OF PAGES 216
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release, distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) Same as block 16.		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Reinforced Concrete Analysis Energy Minimization Dynamic Analysis Structural Failure and Collapse Nonlinear Structural Response Air Blast Effects Finite Element Method		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the mathematical model and the solution process which form the basis of the computer program SINGER. The function of SINGER is to predict the behavior of plane skeletal reinforced concrete structures in their environments. Of primary interest is the transient nonlinear response including element failures and structural collapse. The structure is represented by a discrete model composed of line elements (models of partial joint releases). The line elements admit geometric and		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

PRICES SUBJECT TO CHANGE
UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

physical nonlinearities; they can predict the behavior of reinforced concrete members subject to axial and flexural distortions up to failure. The state of the element is characterized by its internal energy.

The state of the system is defined by the work function, a scalar function that contains implicitly all the forces acting on the system. The work function is uniquely defined in terms of the generalized coordinates, which must be related to the equilibrium path (motion) when the system behaves nonlinearly.

The solution process (the determination of the generalized coordinates relative to a prescribed load or a specific time) is based on the minimization of the work function. Stable equilibrium states of the system correspond to points at which the work function assumes a relative minimum.

// UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

This final report was prepared by the Department of Civil Engineering, Virginia Polytechnic Institute and State University, Blacksburg, Virginia under Contract F29601-73-C-0022, Program Element 62704H, Project 5710, WDNS 3414, Subtask Y99QAXSC157, with the Air Force Weapons Laboratory, Kirtland Air Force Base, New Mexico. Rodney G. Galloway, 2 LT, USAF, was the Laboratory Project Officer-in-Charge. Major Tyler M. Jackson was the former Laboratory Project Officer.


When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This technical report has been reviewed and is approved for publication.



RODNEY G. GALLOWAY, 2 LT, USAF
Project Officer

FOR THE COMMANDER

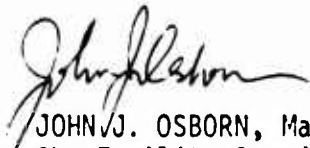

JOHN J. OSBORN, Major, USAF
Ch, Facility Survivability Branch



W. B. LIDDISCOET, Colonel, USAF
Ch, Civil Engineering Research Division

iii



DO NOT RETURN THIS COPY. RETAIN OR DESTROY.

CONTENTS

<u>Section</u>	<u>Page</u>
1 INTRODUCTION.	3
1.1 BACKGROUND.	3
1.2 PURPOSE AND SCOPE	10
1.3 METHODOLOGY	11
2 MATHEMATICAL MODELS	14
2.1 ACTIONS	14
2.2 ELEMENT MODEL	15
2.2.1 DISCRETIZATION	16
2.2.2 COMPATIBILITY.	22
2.2.3 CONSTITUTIVE LAWS.	24
2.2.4 INTERNAL ENERGY.	24
2.2.5 STRESS RESULTANTS.	30
2.3 SYSTEM MODEL.	32
2.3.1 COMPATIBILITY.	33
2.3.2 STABILITY OF EQUILIBRIUM	38
2.4 FAILURE CRITERIA.	38
2.4.1 ELEMENT FAILURE.	38
2.4.2 SYSTEM FAILURE	41
2.5 LIMITATIONS	44
3 RESPONSE.	46
3.1 DISCRETIZATION OF MOTION.	47
3.2 WORK-FUNCTION MINIMIZATION.	48
3.3 PROCESS ERRORS.	50
4 SUMMARY	54
REFERENCES	58
NOTATION.	60
APPENDICES	
A. CONSTITUTIVE LAWS FOR CONCRETE AND STEEL	64
B. ELEMENT FAILURE CRITERIA	80
C. BIBLIOGRAPHY	151

SECTION 1

INTRODUCTION

This investigation is concerned with the prediction of the nonlinear response of reinforced concrete structures, including member failures and structural collapse, to static and dynamic loads. The computer program SINGER, the product of this investigation, provides the tool for this prediction. This report describes the mathematical models and the solution process which form the basis of SINGER.

1.1 BACKGROUND

Since it was desired to represent the structure by a discrete model composed of "gross elements," it was natural to select the finite element method to model the structure. However, the selection of the solution process represented a pivotal decision. Two methods were given serious consideration: the step-by-step (STEP) approach, an equilibrium approach in which the structure is represented by a stiffness matrix; and the minimization (MIN) approach, an energy approach in which the structure is characterized by a work function. In both approaches, the solution process initiates at a point where the state of the system is known and proceeds along discrete points of the equilibrium path (motion) of the system.

The STEP approach has been used extensively in the analysis of nonlinear structures and is well documented [e.g., 14,17]*. The central idea of the STEP approach is contained in Newton's method of successive approximations to a real root [15]. It is illustrated in Figure 1a, which depicts the nonlinear equilibrium path of a one-degree-of-freedom

*Numbers in brackets designate references

system. The path is defined by the equilibrium equation

$$p = f(x) \quad (1.1)$$

where p is the applied load, f is the restoring force (a nonlinear function in x), and x denotes the displacement from the unloaded state. The condition of equilibrium corresponding to a specific load \bar{p} is

$$\Delta p = \bar{p} - f(x) = 0 \quad (1.2)$$

where Δp denotes the unbalanced load. The tangential stiffness at any point of the equilibrium path is defined by

$$k_t = \frac{df(x_i)}{dx} \quad (1.3)$$

If Newton's process is applied to the n^{th} trial solution, x_n , and

$$\Delta p_n = \bar{p} - f(x_n) \neq 0 \quad (1.4)$$

the correction to x_n is

$$\Delta x_n = k_n^{-1} \Delta p_n \quad (1.5)$$

Thus, the $n + 1^{\text{st}}$ trial solution is

$$x_{n+1} = x_n + \Delta x_n \quad (1.6)$$


This process is continued until the unbalanced force Δp is sufficiently small.

Two modifications of this process are obtained by using the constant stiffness coefficient


$$k_o = \frac{df(o)}{dx} \quad (1.7)$$

during the entire iterative process (see Figure 1b) or by combining the constant and variable stiffness coefficients in the solution process [17].

The extension of Newton's method to a system with multi-degrees-of-freedom is known as the Newton-Raphson method. On the basis of the finite

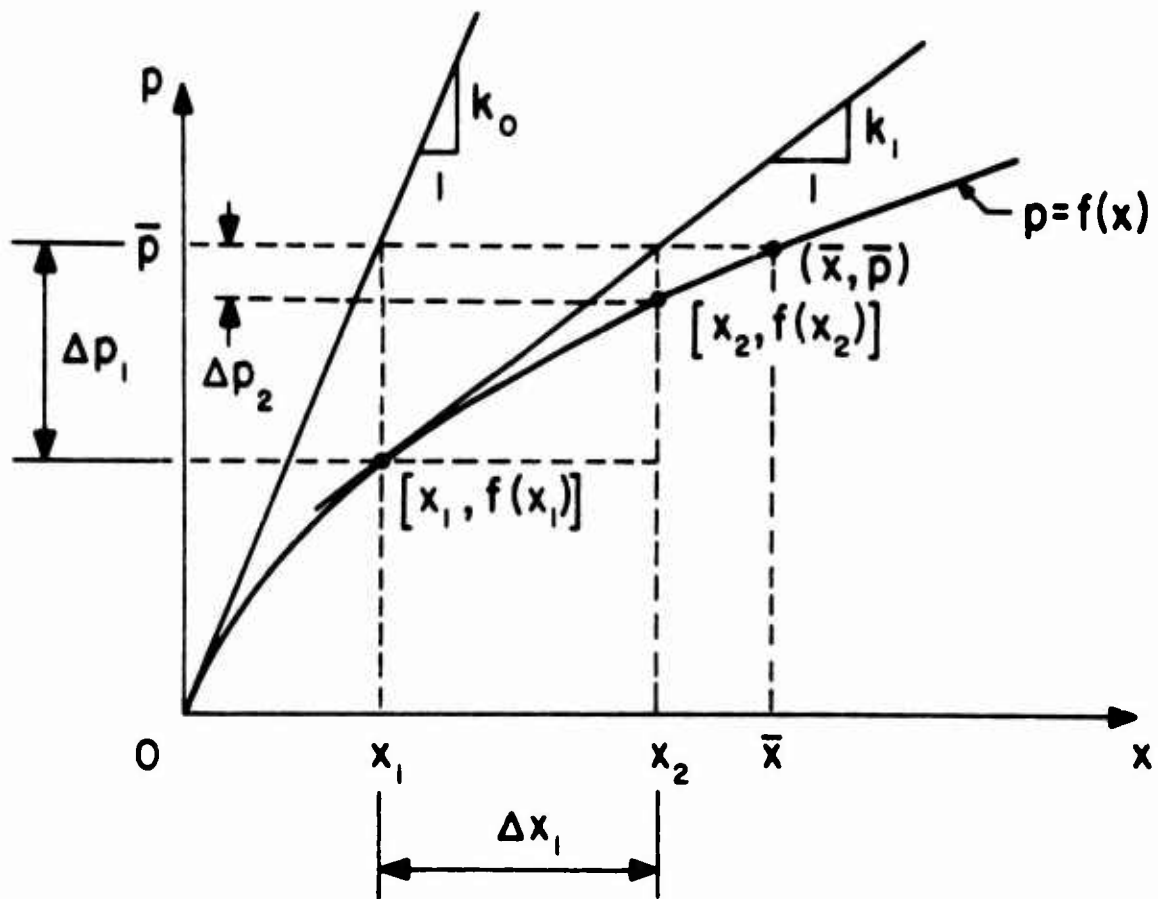

(a) VARIABLE STIFFNESS

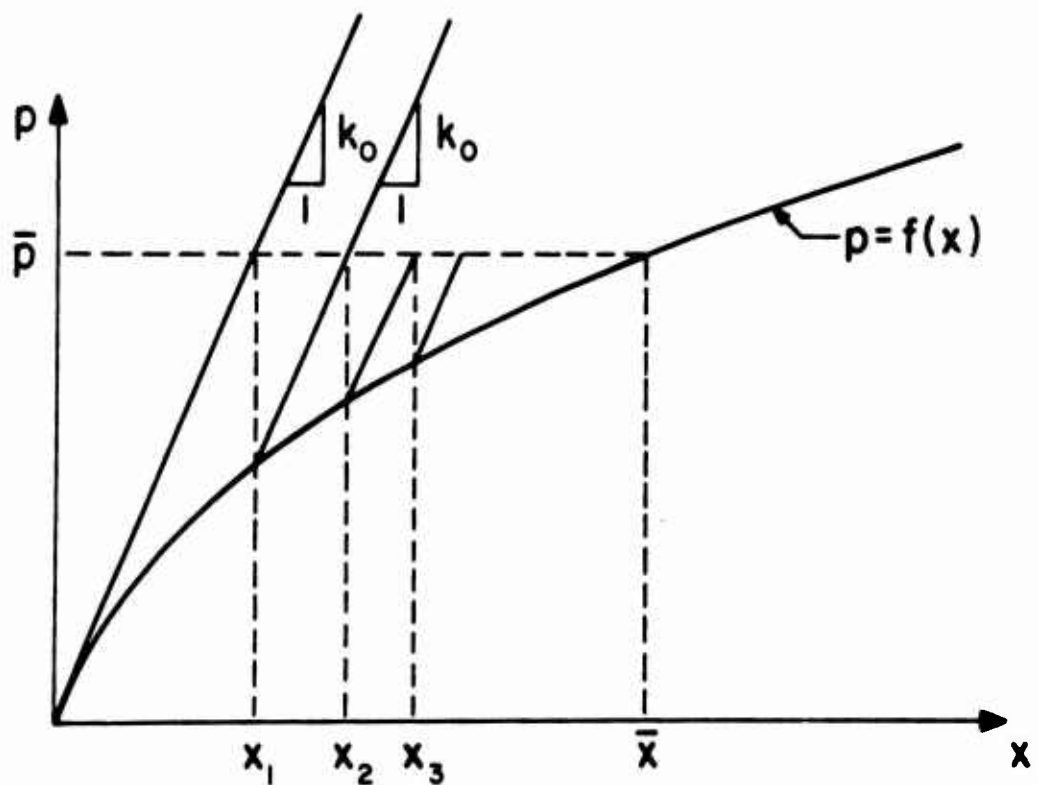

(b) CONSTANT STIFFNESS

FIG. 1. STEP PROCESS

element method, the governing equations of equilibrium can be expressed in the form [17]

$$\bar{p} = \int_V \bar{B}^T \sigma dV \quad (1.8)$$

where

$$\epsilon = Bx \quad (1.9)$$

and

$$\delta \epsilon = \bar{B} \delta x \quad (1.10)$$

In Equations 1.8, 1.9, and 1.10, \bar{p} and x represent the external generalized force and displacement vectors, respectively; σ and ϵ denote the stress and strain vectors, respectively (the constitutive laws may be nonlinear); B is the compatibility matrix which may depend on x , in which case $\bar{B} \neq B$; δ signifies a virtual variation; and V denotes the volume of the system. Again the condition of equilibrium for a specific force vector \bar{p} is

$$\Delta \bar{p} = \bar{p} - \int_V \bar{B}^T \sigma dV = 0 \quad (1.11)$$

where $\Delta \bar{p}$ is the unbalanced force vector. Analogous to the Newton process, the correction to the n^{th} trial solution, x_n , is

$$\Delta x_n = K_T^{-1} \Delta \bar{p}_n \quad (1.12)$$

and the $n + 1^{\text{st}}$ trial solution is defined by

$$x_{n+1} = x_n + \Delta x_n \quad (1.13)$$

The tangent stiffness matrix K_T in Equation 1.12 is obtained by forming a virtual variation of Equation 1.8 with respect to x ; the result can be expressed in the form

$$\delta \bar{p} = K_T \delta x \quad (1.14)$$

The unbalanced force vector corresponding to any trial solution is evaluated on the basis of Equation 1.11. The solution process is continued until the unbalanced forces are sufficiently small. The modifications of the Newton process are also employed in the Newton-Raphson process.

The MIN approach is based on the property that the work function [7] of the system assumes a relative minimum at a stable equilibrium state. Accordingly, a desired equilibrium state is found by minimization of the work function. Function minimization is accomplished via nonlinear programming techniques. The MIN approach has been employed successfully in the analysis of nonlinear structures [e.g., 2, 5, 9].

The MIN process, which is discussed in more detail in section 3, is illustrated for a two-degree-of-freedom system in Figure 2. The work function W is represented by level curves. Function minimization is based on a modification of Davidon's method [13]. The search for the desired equilibrium state \bar{x} corresponding to the applied load vector \bar{p} initiates at x_0 in the direction d_1 . The first trial solution x_1 is obtained by minimizing the function W along the direction d_1 . A new search direction d_2 is established, and the relative minimum of W with respect to d_2 is found to be x_2 (the search directions are defined by transformations of the gradients of the work function [13]). The iterative process is continued until the components of the gradient of the work function, which correspond to the unbalanced forces, are sufficiently small.

It was decided that both the STEP and MIN approach provide a

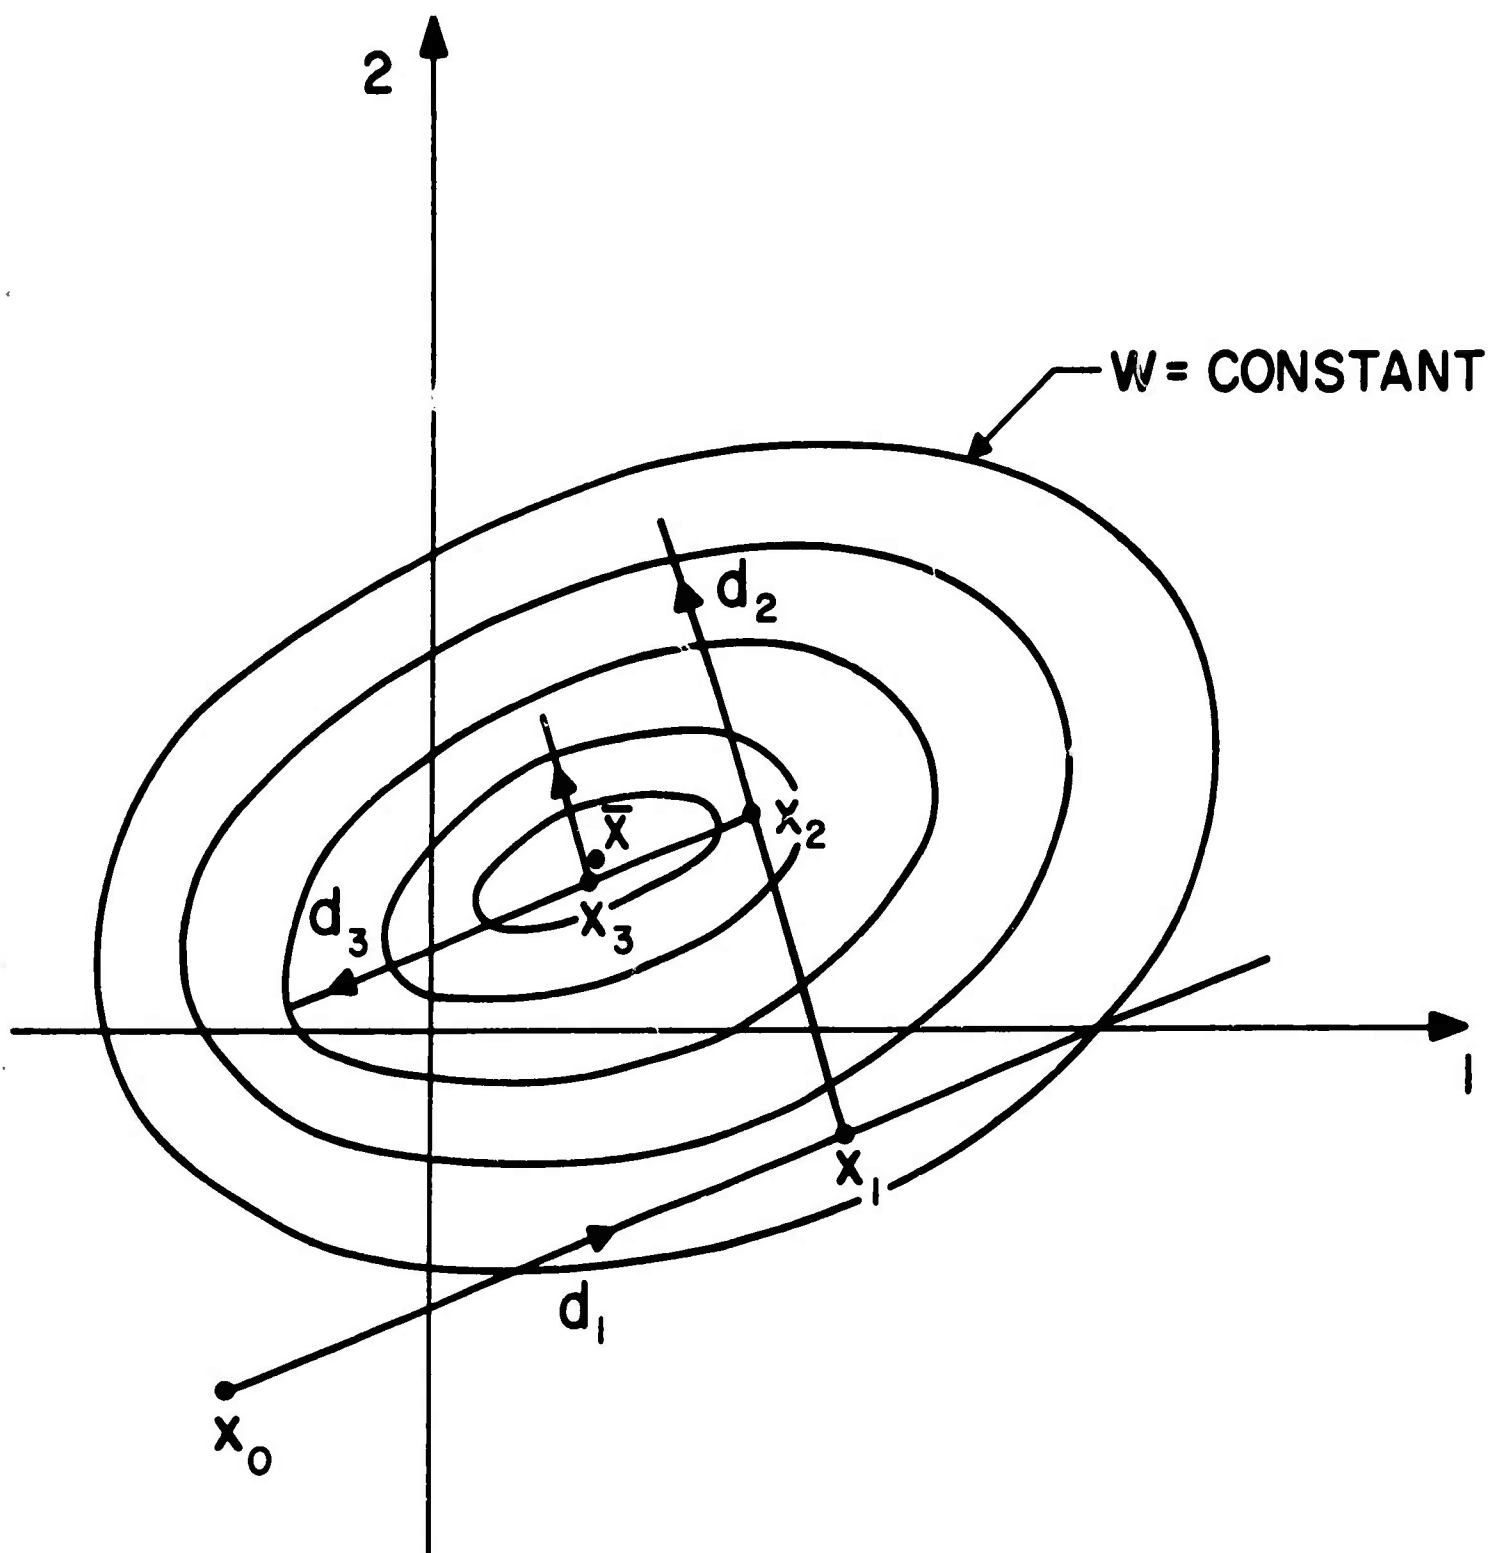


FIG. 2. MIN PROCESS

satisfactory basis for the proposed modeling and solution process. The final selection of the MIN approach was strongly influenced by the following factors:

In the MIN process, the search for an equilibrium state is always based on the actual state of the system corresponding to an assumed displacement configuration. The STEP approach is a quasi-linear approach in which every trial solution is based on the stiffness properties of the system at the beginning of the iteration (Figure 1). Hence, in the MIN approach, decisions are always based on the actual state of the system.

Depending on the choice of the minimization algorithm, substantial storage space savings can be achieved with the MIN process since the structure is represented by a scalar function. However, the Davidon algorithm [13] does require storage space comparable to the STEP process.

The computation and "inversion" of the tangent stiffness matrix in the Newton-Raphson process (Equation 1.12) requires a significant amount of computational effort at each cycle. The alternate approach of a constant stiffness matrix converges only for certain types of nonlinearities [14]. Hence, at least a combination of the constant and variable stiffness matrices is required.

1.2 PURPOSE AND SCOPE

The function of the computer program SINGER is to predict the behavior of plane skeletal reinforced concrete structures in their environ-

ments. Of particular interest is the nonlinear transient response including the possibility of element failures and structural collapse.

SINGER is intended to serve as a tool for the improvement and development of techniques for the assessment of existing protective structures, the design of new systems, and the development of motion environment criteria for internal systems of protective structures.

1.3 METHODOLOGY

The prediction of the performance of the structure in its environment is based on the response of a mathematical model of the structure to actions, which simulate the environment. The analysis process comprises three principal tasks:

1. The formulations of actions, the mathematical models of the environment.
2. The development of a mathematical model of the structure.
3. The formulation of the solution process.

The actions consist of the self-weight of the structure, distributed and concentrated static and dynamic loads, inertia forces, and support motions.

The structure is represented by an assemblage of discrete line elements and springs interconnected at a finite number of points. The line elements are models of straight, prismatic, reinforced concrete members whose longitudinal plane of symmetry corresponds to the plane of loading. The line element is discretized via the finite element method; the internal energy, which characterizes the state of the element, is a function of the element distortion components (three relative end-displacements

and one relative internal-displacement). Springs represent models of joints with partial releases. A concentrated mass is assigned to each degree of freedom of the assemblage. Energy dissipation resulting from inelastic behavior accounts for structural damping.

The line elements admit geometric and physical nonlinearities. Geometric nonlinearities are induced by the coupling of flexural and axial distortions and the formulation of equilibrium for the deformed state of the assemblage. Physical nonlinearities are caused by nonlinear constitutive (stress-strain) laws. The springs are assumed to behave linearly.

The behavior of the element is modeled up to the limit of continuous change of state, defined as fracture (e.g., crushing of the compression block constitutes element failure; however, minor discontinuities such as spalling of the concrete cover are modeled).

In the linear domain, the state of the system is completely defined by the generalized coordinates which consist of nodal displacements, relative internal element-displacements, and relative release-displacements. In the nonlinear range, the generalized coordinates must be related to the motion (equilibrium path) of the system to define the state of the system. The origin of the generalized coordinates corresponds to the unstrained state of the system, termed the initial state.

The response of the system to dynamic actions is determined at a discrete number of points in time. The solution process is a closed iterative process within two successive points in time, the time step. The time function of each generalized coordinate is approximated

over the time step by a finite power series whose coefficients are expressed in terms of three known initial conditions, the displacement, velocity, and acceleration at the beginning of the time step, and one unknown end condition, the displacement at the end of the time step. This representation of the time function permits one to express the inertia forces at the end of the time step in terms of the unknown displacements. Consequently, the state of the system at the end of the time step can be completely defined in terms of the corresponding generalized coordinates. For this purpose a work function is introduced, a scalar function of the generalized coordinates, which contains implicitly all the forces acting on the system (applied, inertia, internal). The desired system configuration at the end of the time step is obtained by minimization of the work function, which assumes a relative minimum at the dynamic equilibrium state. The minimization process is a search process in which a system configuration is assumed, the inertia forces are computed and added to the applied external forces, the work function is formulated and tested for a relative minimum. With the aid of the information gained in this test, a new configuration is found, and the process is repeated until the equilibrium imbalance at the end of the time step is sufficiently small.

This solution process can also be employed to obtain the nonlinear response to static loads. Aside from the inertia forces, the difference between the static and dynamic analysis is conceptual. Instead of a time step, a load increment is specified and the corresponding configuration is again obtained by work function minimization.

SECTION 2

MATHEMATICAL MODELS

This section presents mathematical models of plane, skeletal, reinforced concrete structures and their environments.

The model of the structure, the system model, is a discrete model composed of line elements (models of reinforced concrete beam-columns) and springs (models of partial joint releases). The line elements admit geometric and physical nonlinearities; they can predict the behavior of reinforced concrete members subject to flexural and axial distortions up to failure, which is defined as the limit of continuous change of state. The state of the element is characterized by its internal energy. The springs are restricted to linear behavior.

The state of the system is defined by the work function, a scalar function that contains implicitly all the forces acting on the system. The work function is uniquely defined in terms of the generalized coordinates, which must be related to the equilibrium path (motion) when the system behaves nonlinearly (cf. section 2.2.4).

Failure criteria are formulated; they define the domain in which the models are valid and provide the basis for predicting element failure and structural collapse.

2.1 ACTIONS

Actions, mathematical models of the environment, consist of the self-weight of the structure, distributed and concentrated loads, inertia forces, and support motions.

All distributed loads and self-weights are replaced by "equivalent" nodal forces [17]. In the linear range of the element, the equivalent nodal forces caused by transverse member loads are equal in magnitude and opposite in sense to fixed-end forces; this is a consequence of the assumed shape functions (cf. section 2.2.1), which correspond to the homogeneous solution of the differential equation of a beam in flexure. This property does not exist in the nonlinear range where the discrete element forms an approximate representation of the continuum.

Inertia forces are computed on the basis of lumped masses assigned to the nodal degrees-of-freedom. The computation of the lumped masses follows the approach described in reference 12 .

2.2 ELEMENT MODEL

The reinforced concrete beam-column is represented by a gross element model. This means that the element forms a one-dimensional continuum, which is discretized in the modeling process.

The initial state of the element is assumed to be unstrained. Deformations are governed by the fundamental assumption that plane sections remain plane and normal to the deformed reference axis. Consequently, the state at any point of the element is defined by the state of the reference axis. Deformations are limited by the assumption that strains and rotations are small relative to unity. Axial and flexural deformations are modeled explicitly; only a measure of shear distortions and their significance is provided. Inelastic deformations are modeled up to element failure. Structural damping is incorporated through energy dissipation associated with inelastic behavior.

The beam-column effect, the coupling of axial and flexural distortions,

is represented by the corresponding nonlinear term in the strain-displacement relation. The member-force interactions, which are characterized in the concrete literature by behavior models, are also formulated at the micro level. This is natural since the behavior model, a macro model governing the axial load-moment-curvature relations at a section, is completely defined by the following section properties: the strain state, the constituents of the section, and the corresponding constitutive laws. The variability of the neutral axis, a characteristic of reinforced concrete beams subjected to axial and flexural distortions, is modeled by admitting axial strain variations along the reference axis. This feature is illustrated in section 2.2.1.

The state of the element is characterized by its internal energy. Conditions of equilibrium are formulated for the assemblage of elements, the structural system. The modeling process, passing from the continuum to the internal energy expressed in terms of a finite number of distortion components, is depicted schematically in Figure 3 : u and v define the deformed reference axis; \bar{u} is a 4-dimensional element distortion vector whose components represent the relative element displacements; x and y are the coordinates of a point in the element (Figure 5); ϵ and σ denote strain and stress at a point, respectively; and U signifies the internal energy of the element.

2.2.1 DISCRETIZATION

The reference axis of the element is depicted in Figure 4 . The reference axis must lie in the longitudinal plane of symmetry, the plane of bending, of the element, and all reference axes incident at a joint

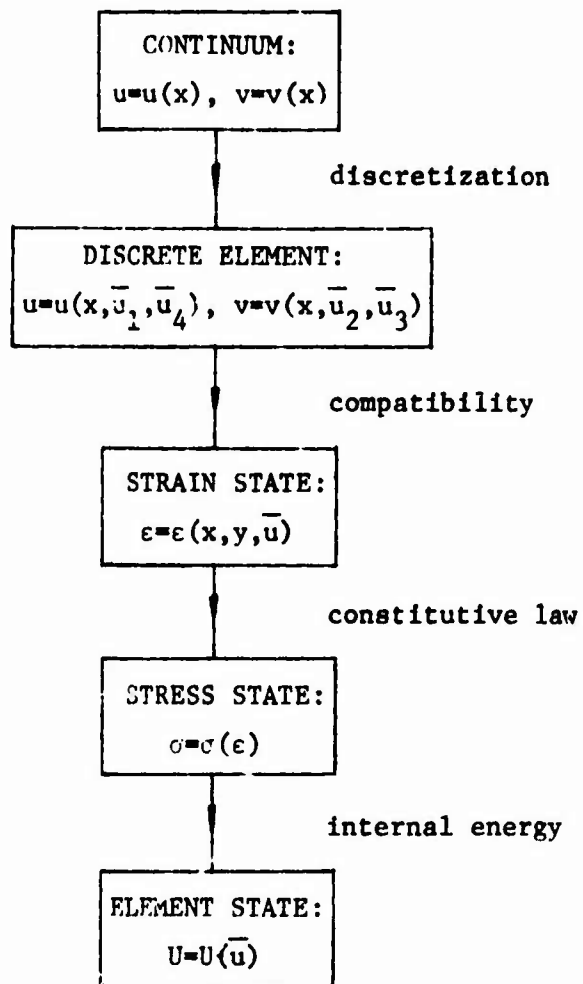


Fig. 3 MODELING PROCESS

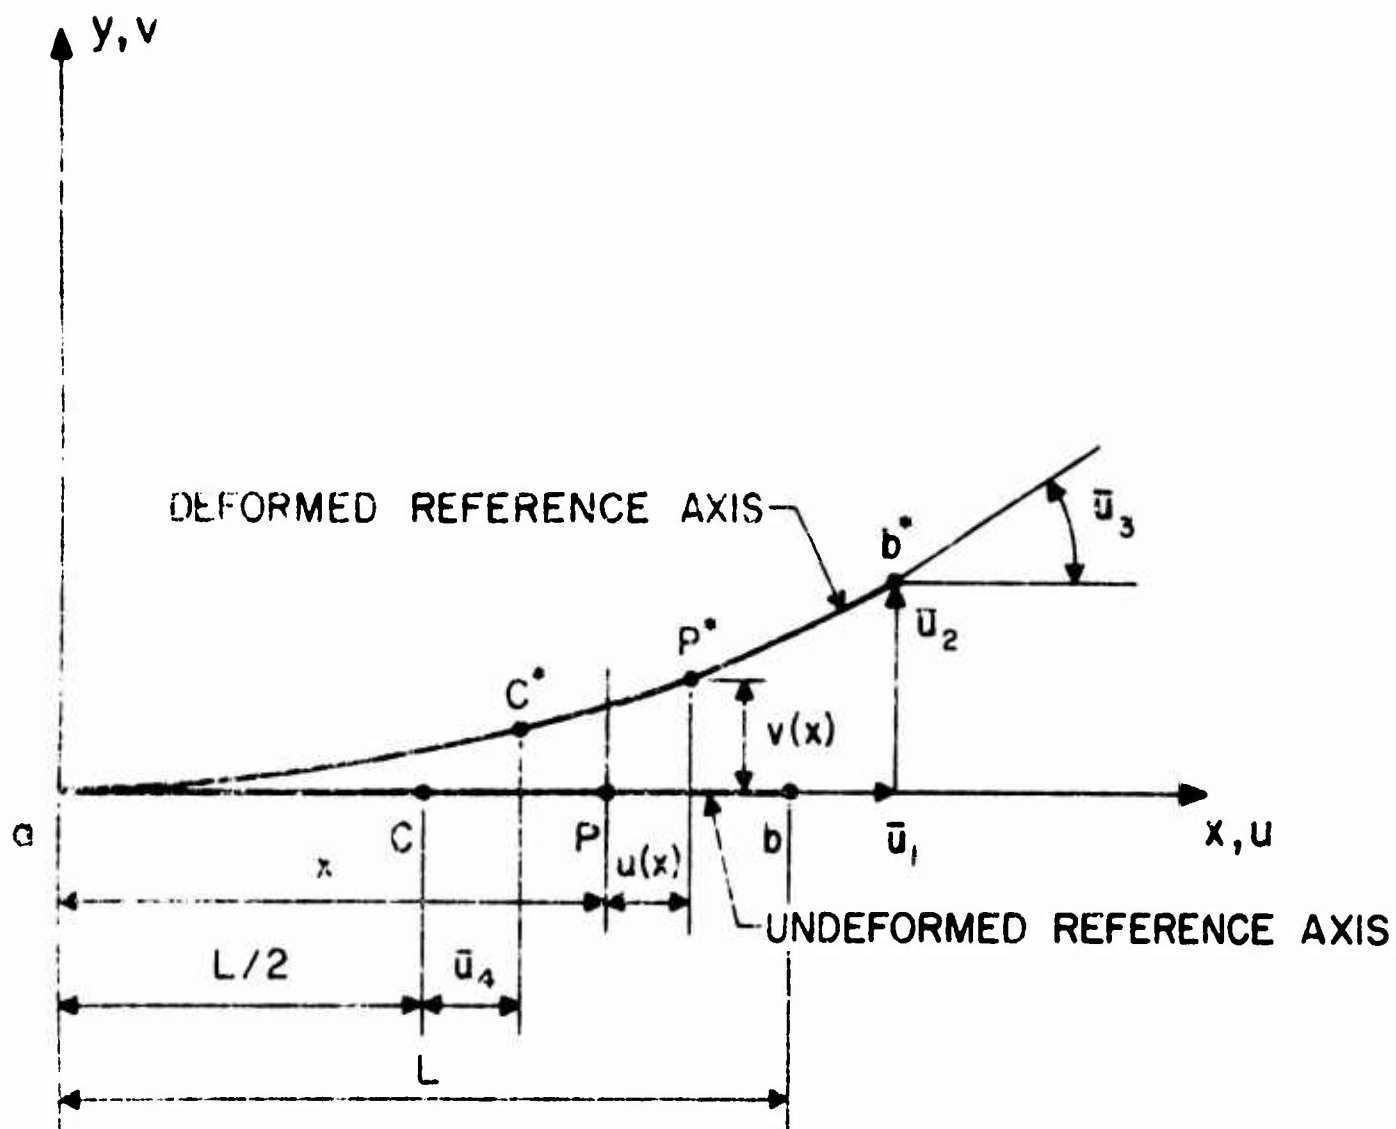


FIG. 4. ELEMENT REFERENCE AXIS

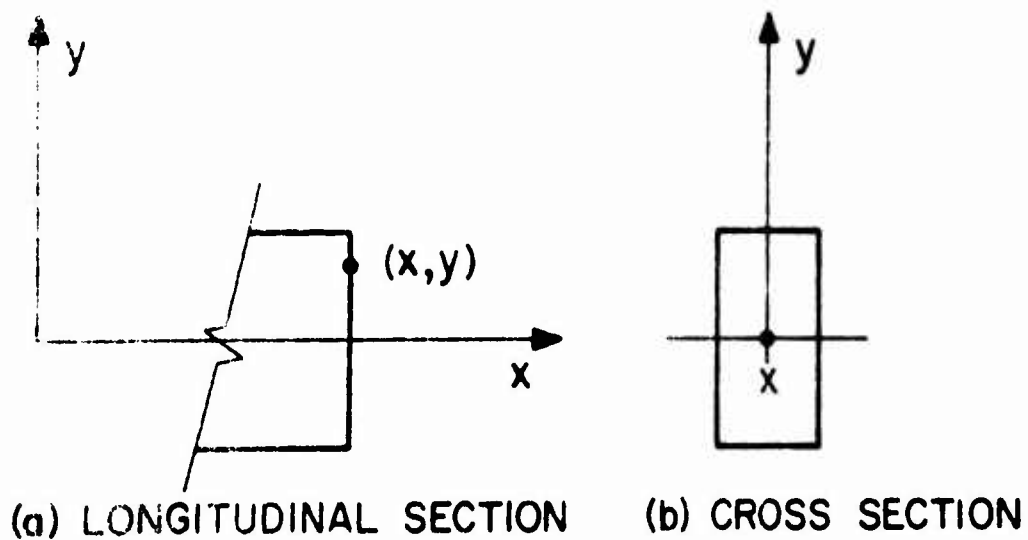


FIG. 5. ELEMENT SECTIONS

must be concurrent. This eliminates the modeling of joint eccentricities. Moreover, the reference axis need only be parallel to a longitudinal edge of the beam; its location in the longitudinal plane of symmetry is arbitrary (see illustrative example on page 20).

The deformation coordinate axes, the x, y -axes in Figure 4, are defined in section 2.3.1. The transformation of the global joint displacements into the element distortion components $\bar{u}_1, \bar{u}_2, \bar{u}_3$ is presented in section 2.3.1. The internal distortion component, \bar{u}_4 , is prescribed directly in the solution process.

The configuration of the deformed reference axis is expressed in the form

$$u(\xi) = \phi_1(\xi)\bar{u}_1 + \phi_4(\xi)\bar{u}_4 \quad (2.1)$$

$$v(\xi) = \phi_2(\xi)\bar{u}_2 + \phi_3(\xi)\bar{u}_3 \quad (2.2)$$

where

$$\phi_1 = 2\xi^2 - \xi \quad (2.3)$$

$$\phi_2 = -2\xi^3 + 3\xi^2 \quad (2.4)$$

$$\phi_3 = L(\xi^3 - \xi^2) \quad (2.5)$$

$$\phi_4 = 4(-\xi^2 + \xi) \quad (2.6)$$

and

$$\xi = x/L \quad (2.7)$$

For a linear element satisfying the conditions of the elementary flexure theory, Equation 2.2 represents an exact description of the transverse flexural deflection v in terms of the relative end-displacements \bar{u}_2, \bar{u}_3 . For a nonlinear element, the shape functions ϕ_2, ϕ_3

provide only an approximate representation of the flexural response. The introduction of the internal distortion component \bar{u}_4 in the longitudinal displacement function, Equation 2.1, permits linear variation in the normal strain along the reference axis (see Equation 2.11). This feature makes it possible to describe the strain state corresponding to a linearly varying neutral axis with respect to any reference axis in the longitudinal plane of symmetry. This property is illustrated in the following example.

Consider the strain state

$$\epsilon(x,y) = -\epsilon_o - \frac{2\epsilon_o}{h} y \left(1 + \frac{x}{L}\right) \quad (2.8)$$

of the beam shown in Figure 6 . The first term on the right-hand side of Equation 2.8 represents a constant normal strain induced by axial compression, and the second term describes a flexural strain that varies linearly with respect to the orthogonal reference axes, x and y ; the x -axis coincides with the centroidal axis of the beam; h and L denote the height and length of the beam, respectively. The neutral axis is formed by the straight line passing through points P and Q (Figure 6). Introduce a reference axis that does not coincide with the centroidal axis; e.g., let the location of the reference axis be described by the coordinate transformations

$$y = \bar{y} - \frac{h}{4}, \quad x = \bar{x} \quad (2.9)$$

which places the reference axis a distance $h/4$ below the centroidal axis (Figure 6). Substitution of Equation 2.9 into Equation 2.8 yields

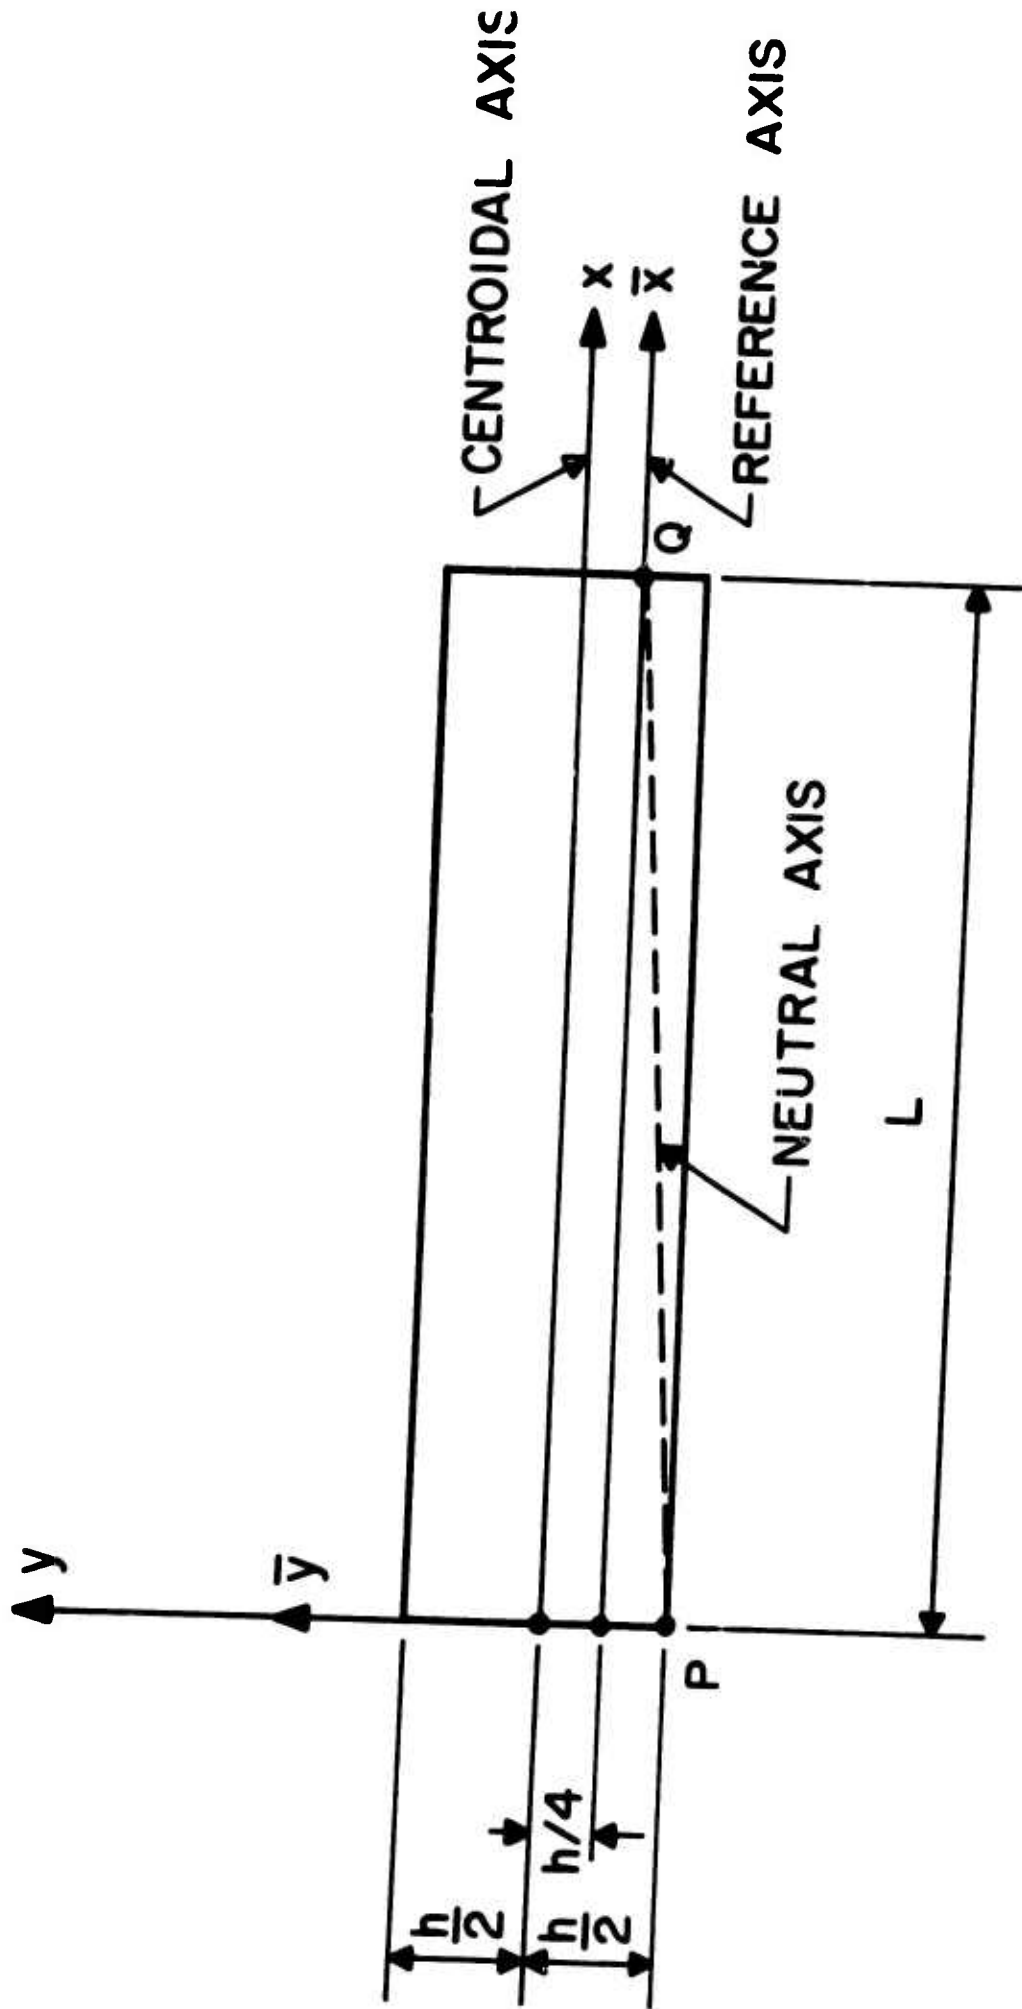


FIG. 6. TRANSLATION OF REFERENCE AXIS

$$\epsilon(\bar{x}, \bar{y}) = -\epsilon_0 \left(\frac{1}{2} - \frac{\bar{x}}{L} \right) - 2 \frac{\epsilon_0}{h} \bar{y} \left(1 + \frac{\bar{x}}{L} \right) \quad (2.10)$$

A comparison of Equations 2.8 and 2.10 indicates that the translation of the reference axis causes the normal strain to vary linearly along the reference axis but does not alter the form of the flexural strain term.

Hence, a strain state corresponding to a linearly varying neutral axis can be described relative to a reference axis that admits linearly varying normal strains.

2.2.2 COMPATIBILITY

The point-wise deformations of the element are defined by the strain-displacement relation (Figure 5)

$$\epsilon(x,y) = \frac{du}{dx} + \frac{1}{2} \left(\frac{dv}{dx} \right)^2 - y \frac{d^2v}{dx^2} \quad (2.11)$$

where $\epsilon(x,y)$ is the normal strain (in the x-direction) at any point (x,y) ; the x-coordinate locates planes normal to the undeformed reference axis, and the y-coordinate locates points in that plane; $u(x)$ and $v(x)$ define the deflections of any point $(x,0)$ on the reference axis in the x and y directions, respectively.

The terms on the right-hand side of Equation 2.11 admit the following geometric interpretations: The first term defines the normal strain induced by axial deformations of the reference axis; the second term represents the contribution of bending of the reference axis to the normal strain [8]; i.e., it accounts for the coupling of axial and flexural distortions; and the third term represents the elementary bending strain.

Equation 2.11 is valid if the strains and rotations are small compared to unity [e.g., 3, 8, 11]. These limitations are characteristic of classical stability investigations leading to conditions of infinitesimal stability (e.g., the Euler buckling load). Equation 2.11 can form the basis of post-buckling investigations provided the strains remain small and the rotations are held small by the division of the element into sub-elements. The same procedure can be employed to model regions of large distortions induced by inelastic deformations.

With the aid of Equations 2.1 and 2.2, the normal strain can be expressed in terms of the element distortion components:

$$\begin{aligned} \varepsilon(\xi, \eta) = & \phi_1' \frac{\bar{u}_1}{L} + \phi_4' \frac{\bar{u}_4}{L} + \frac{1}{2} \left(\phi_2' \frac{\bar{u}_2}{L} + \frac{\phi_3'}{L} \bar{u}_3 \right)^2 \\ & - \eta \left(\phi_2'' \frac{\bar{u}_2}{L} + \frac{\phi_3''}{L} \bar{u}_3 \right) \end{aligned} \quad (2.12)$$

where

$$\phi_1' = 4\xi - 1 \quad (2.13)$$

$$\phi_4' = 4(-2\xi + 1) \quad (2.14)$$

$$\phi_2' = 6(-\xi^2 + \xi) \quad (2.15)$$

$$\phi_3' = L(3\xi^2 - 2\xi) \quad (2.16)$$

$$\phi_2'' = 6(-2\xi + 1) \quad (2.17)$$

$$\phi_3'' = L(6\xi - 2) \quad (2.18)$$

and

$$\eta = y/L \quad (2.19)$$

2.2.3 CONSTITUTIVE LAWS

The stress-strain laws governing material behavior are presented in appendix A. They are expressed in terms of piece-wise linear functions such that to every point in the domain (ϵ) corresponds a unique point in the range (σ), which is determined by the strain history.

The constitutive laws presented model the behavior of concrete (unconfined and confined) and reinforcing steel for monotonic and cyclic loading. The inherent assumptions and limitations are stated.

2.2.4 INTERNAL ENERGY

Energy evaluation represents the pivotal task in the search of the equilibrium state corresponding to a prescribed time (or load). All measures of response (e.g., displacements, deformations, strains, stresses, energies) are expressed relative to the "initial state," which is the unstrained and unloaded configuration of the system.

Energy evaluation in the context of the solution process means the computation of the total energy of the system for a given displacement state. The internal energy evaluation proceeds as follows: On the basis of Equation 2.11 and appropriate constitutive laws (appendix A), the "internal-energy density," the internal energy per unit volume, is determined. Integration of the internal-energy density over the volume of the element yields the internal energy of the element. The internal energy of the system is equal to the sum of the internal energies of all elements comprising the system (if the system contains release springs, their strain energies must be added).

The principal assumption in the energy computation is that no "load

reversals" occur during a time step; i.e., during the entire time step, the strain at any point in the system is either monotone increasing or monotone decreasing.

Energy evaluations must be conducted numerically. In the elastic range, numerical integration is dictated by the possible variation of cross-sectional properties (e.g. area of compression block) over some region of the element. For instance, an axial load and a varying bending moment cause a varying neutral axis (cf. illustrative example on page 20). In the inelastic range, it is not possible to formulate explicitly the variation of the internal-energy density over the volume of the element.

The numerical energy evaluation is based on the discretization of the energy stored in the element. It involves two principal tasks:

1. The computation of the internal-energy density at a discrete number of points in the element.
2. The integration of the internal-energy density over the volume of the element.

The computation of the internal-energy density during the solution process of a typical time step, from t_1 to t_2 , is described with the aid of Figure 7 . t_1 corresponds to the time at which the last equilibrium state of the system has been obtained, and t_2 denotes the time at which the next equilibrium state is sought. The stress-strain curves in Figure 7 govern the behavior of a discrete point of the element. ϵ_1 and ϵ_2 denote strains at t_1 and t_2 , respectively; both

loading ($\epsilon_2 > \epsilon_1$) and unloading ($\epsilon_2 < \epsilon_1$) cases are illustrated. The internal-energy density at time t_2 is

$$u_2^* = u_1^* + u_{12}^* \quad (2.20)$$

where


$$u_1^* = \int_0^{\epsilon_1} \sigma d\epsilon \quad (2.21)$$

represents the internal-energy density at t_1 , and


$$u_{12}^* = \int_{\epsilon_1}^{\epsilon_2} \sigma d\epsilon = \begin{cases} >0 & \text{if } \epsilon_2 > \epsilon_1 \\ <0 & \text{if } \epsilon_2 < \epsilon_1 \end{cases} \quad (2.22)$$

represents the change in the internal-energy density during the time step t_1, t_2 . It follows from Figure 7 that for a given value of strain ϵ_2 , there corresponds a unique value of stress. Consequently, the internal-energy density, and hence the internal energy, is uniquely defined by the strain state, which in turn is a unique function of the displacement state. Hence, in the neighborhood of an equilibrium state, the internal energy of the system is a unique function of the generalized coordinates.

In the inelastic range, the internal-energy density consists of a dissipative component U_d^* , which is locked into the material by residual stresses on the microscopic level, and a recoverable component U_r^* , which is released by the material upon unloading (see Figure 8). The dissipative component accounts for structural damping.

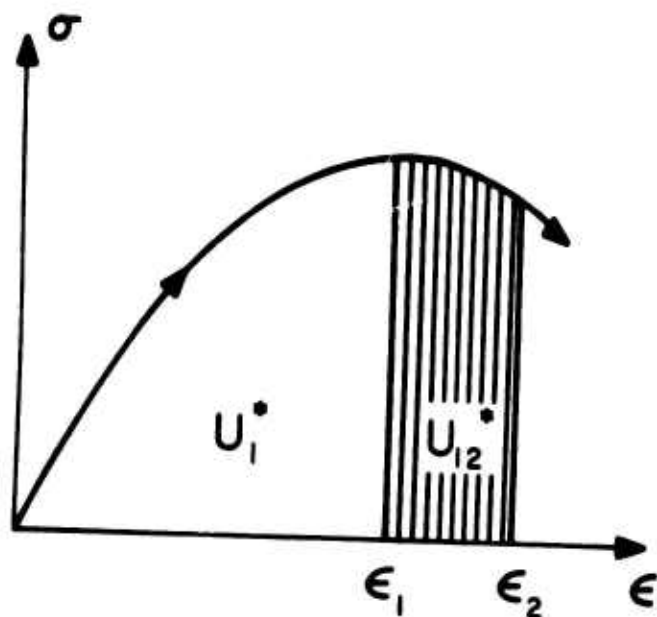


(a) LOADING

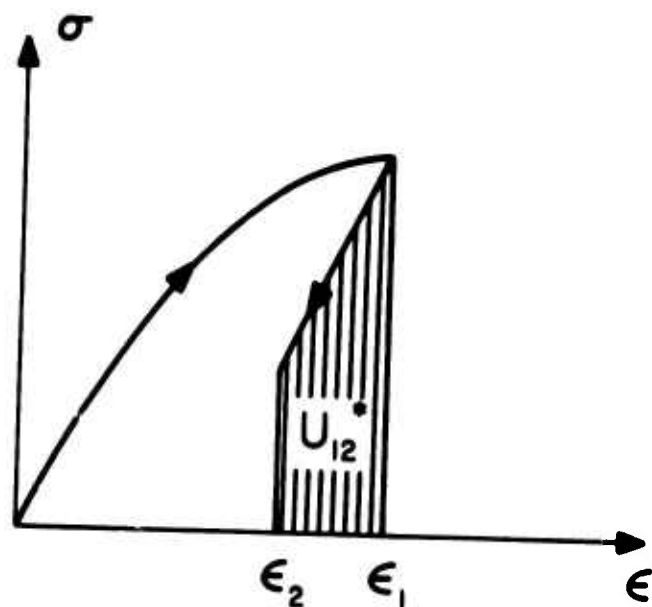


(b) UNLOADING

FIG. 7. INTERNAL-ENERGY DENSITY

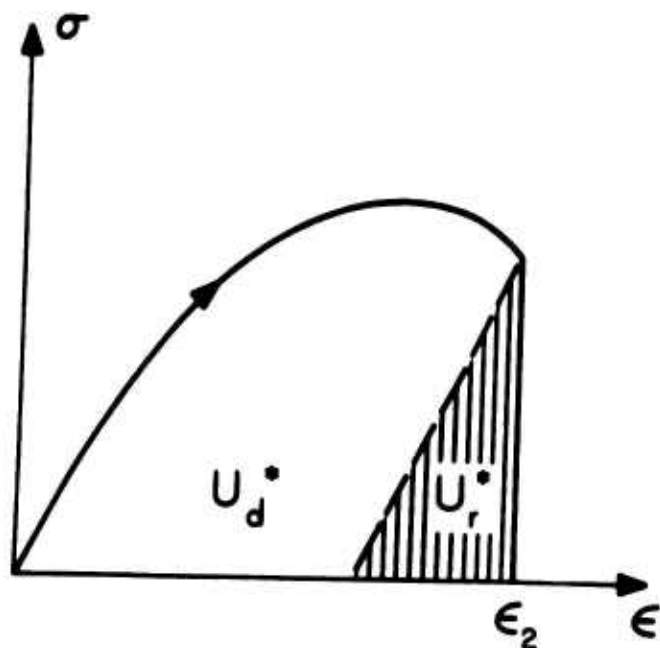

(a) LOADING

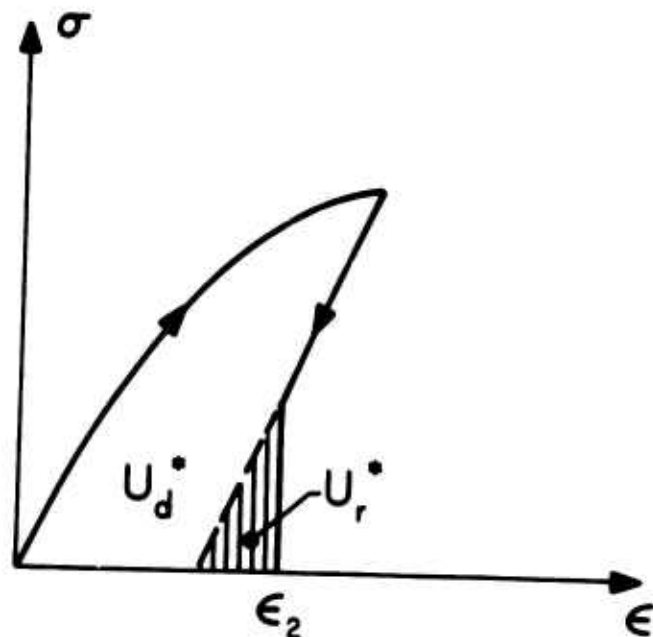

(b) UNLOADING

FIG. 8. DISSIPATIVE & RECOVERABLE ENERGY

The computation of the internal energy of the element is based on the Gaussian quadrature method [17]; the concrete and steel are considered separately. The internal-energy densities are evaluated at discrete points, the Gauss points, and substituted into the Gaussian quadrature formula to yield the energy stored in the element. The Gauss points are distributed in the longitudinal plane of the element as follows: six points (a 2 x 3 rule) are placed in the top and bottom concrete covers, nine points (a 3 x 3 rule) are placed in the concrete between the covers, and three points are placed along the centroidal axis of each steel layer. The accuracy of the energy computation increases with the number of Gauss points per element, which at present is fixed. Hence, it can only be controlled indirectly through the division of the element into sub-elements.

Energy variations govern the behavior of the mathematical model of the structure. The accuracy of response predictions of the structure is limited by the accuracy inherent in the energy evaluations. For this reason internal energies induced by shear distortions are not included in the mathematical model; only estimates of the internal energy caused by shear distortions and measures of the significance of these distortions are provided. The modification of the element model to account for shear distortions introduces uncertainties which may seriously affect the reliability of the model. The sources of uncertainty are identified in the following discussion.

On the basis of the elementary beam theory including shear effects,

the shape functions in Equation 2.2 can be modified to assume the form [12]

$$\phi_2 = \frac{1}{1+\gamma}(-2\xi^3 + 3\xi^2 + \gamma\xi) \quad (2.23)$$

and

$$\phi_3 = \frac{L}{1+\gamma}[\xi^3 - \xi^2 + \frac{\gamma}{2}(\xi^2 - \xi)] \quad (2.24)$$

where

$$\gamma = \frac{12EI}{L^2 A_s G} \quad (2.25)$$

and

$$A_s = \frac{A}{\kappa} \quad (2.26)$$

γ is a measure of the relative importance of shear deformations. In particular, γ is the ratio of the shear deflection to the bending deflection of a fixed-fixed beam subject to a relative end displacement. It is important to recall that Equation 2.25 is based on the assumption that the beam is prismatic, homogeneous, isotropic, and linearly elastic. Accordingly, the symbols in Equations 2.25 and 2.26 are constants for a given beam: E and G denote Young's modulus and the shear modulus of elasticity, respectively; A , A_s , and I define the area, the effective shear area, and the moment of inertia of the cross section, respectively; κ is a shape factor that reflects the variation of the shear stress across the section; and L is the length of the beam.

For an inelastic reinforced concrete beam-column, the quantities in Equation 2.25 are not constants: The moduli E and G vary pointwise over the volume of the uncracked concrete and steel; the section properties A , A_s , and I vary with the longitudinal axis of the beam due to non-

uniform cracking; especially the effective shear area A_s is difficult to define since the shear-stress distribution over a cracked section is not known. In essence, the problem is that Equation 2.25 is defined in terms of macro quantities which at best provide an indirect description of the state of an inelastic reinforced concrete beam-column. The same difficulty is encountered in the formulation of the shear energy which is defined by the relation

$$U_s = \int_0^L \frac{V^2 dx}{2A_s G} \quad (2.27)$$

or

$$U_s = \frac{V^2 L}{2A_s G} \quad (2.28)$$

since the shear force V is constant in the element model.

In view of the uncertainties inherent in the prediction of shear effects, they are not modeled explicitly; only a measure of the significance of shear distortions is provided on the basis of Equation 2.25, and an estimate of the internal energy induced by shear distortions is made on the basis of Equation 2.28. In the evaluation of Equations 2.25, 28, E and G are assumed to be elastic and κ is set equal to 1.20.

2.2.5 STRESS RESULTANTS

The element end-forces, which act at the reference axis (cf. Figure 9), are computed on the basis of the following formulas:

$$f_{b1} = \int_{A(L)} \sigma(L,y) dA \quad (2.29)$$

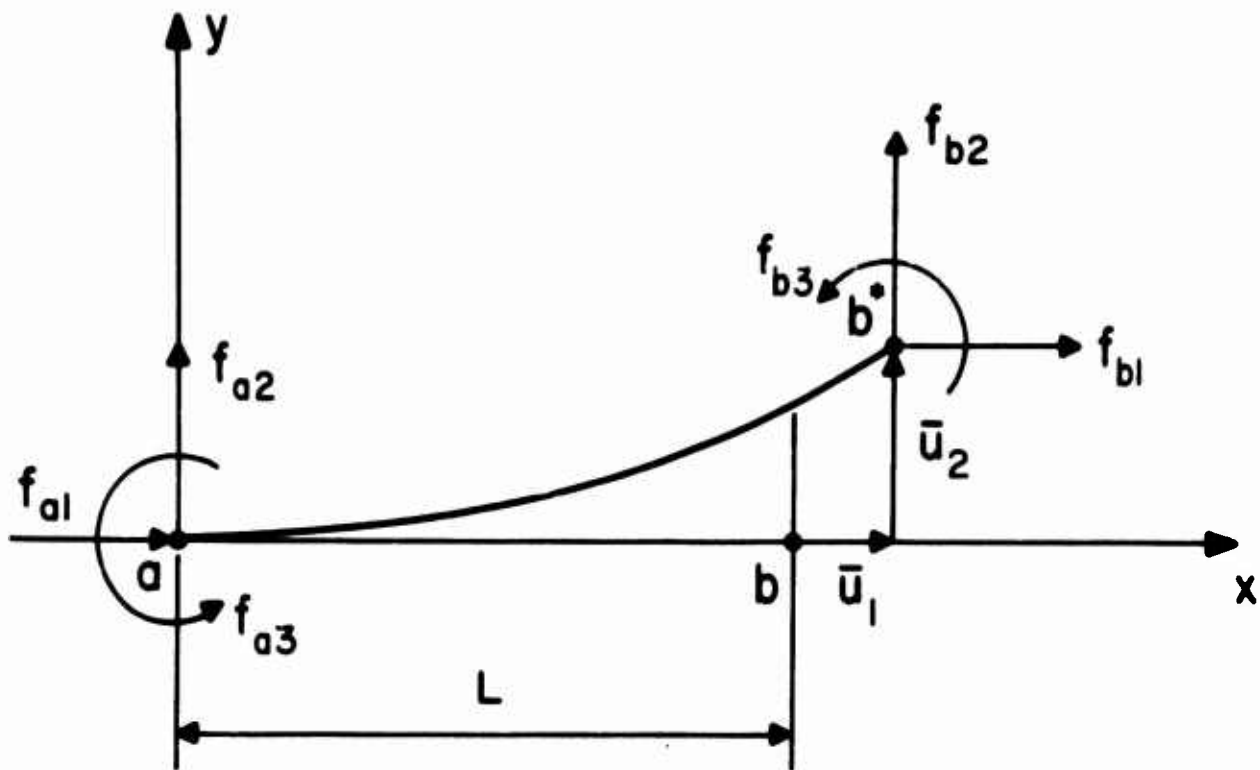


FIG. 9. ELEMENT FORCES
(STRESS RESULTANTS)

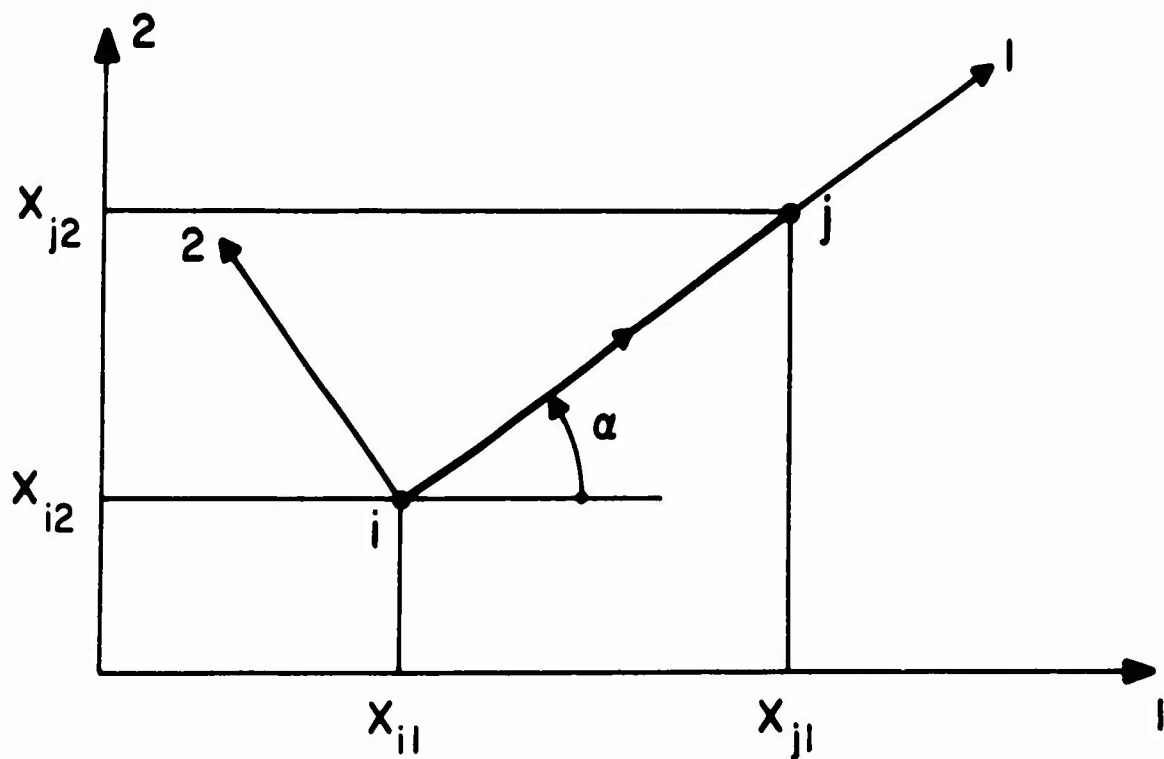


FIG. 10. INITIAL ELEMENT CONFIGURATION

$$f_{b3} = - \int_{A(L)} y \sigma(L, y) dA \quad (2.30)$$

$$f_{a3} = \int_{A(0)} y \sigma(0, y) dA \quad (2.31)$$

$$f_{b2} = (-f_{b3} - f_{a3} + f_{b1} \bar{u}_2) / L \quad (2.32)$$

$$f_{a1} = -f_{b1} \quad (2.33)$$

$$f_{a2} = -f_{b2} \quad (2.34)$$

where f_{ai} , f_{bi} , $i = 1, 2, 3$, are the element forces at the a & b-end, respectively; and $A(0)$, $A(L)$ represent the cross-sectional areas at the a & b-end, respectively.

2.3 SYSTEM MODEL

The system model is a mathematical representation of plane, skeletal, reinforced concrete structures. It is an assemblage of line elements interconnected at a finite number of nodes. The elements are assumed to be rigidly connected at the nodes unless partial or complete releases are specified.

In the linear domain, the state of the system is completely defined in terms of the generalized coordinates which consist of nodal displacements, internal-element distortion components, and relative displacements at releases. In the nonlinear domain, the generalized coordinates must be related to the equilibrium path (motion) of the system to define the state of the system (see section 2.2.4). In the "initial state," the

generalized coordinates are zero.

There is no restriction on the magnitude of the generalized coordinates per se; however, relative displacements, such as the relative displacements of nodes linked by an element, are limited by the small deformation requirements of the element (cf. section 2.2.2). Violations of these limitations can be resolved through the insertion of additional nodes, i.e., through the subdivision of elements.

The following sections are concerned with compatibility and stability of equilibrium of the system.

2.3.1 COMPATIBILITY

This section relates nodal displacements with relative element displacements, called element distortion components. In the derivation of these components, four orthogonal, right-handed, Cartesian coordinate systems are employed; they are called global, local, joint, and deformation systems. The deflections are positive if they take place in the positive direction of the 1, 2-axes; the positive sense of rotations about the 3-axis is determined by the right-hand rule.

The global and local systems correspond to the coordinate systems used in linear matrix analysis (Figure 10). Joint coordinates and joint properties (e.g., forces and displacements) are expressed in global coordinates and denoted by capital letters. Local axes define the orientation of the undeformed element: the 1-axis coincides with the reference axis, and the 2 & 3-axes correspond to principal axes of the cross-section. The 1-axis specifies the direction of the element; the element in Figure 10 goes from joint i to joint j. Local vectors are

identified by lower-case letters.

The transformation of a two-dimensional global vector Y into a two-dimensional local vector y is defined by the matrix A :

$$y = AY \quad (2.35)$$

where

$$A = \begin{bmatrix} c & s \\ -s & c \end{bmatrix} \quad (2.36)$$

and

$$c = \cos \alpha, \quad s = \sin \alpha \quad (2.37)$$

It follows from Fig. 10 that

$$c = \Delta X_1 / L, \quad s = \Delta X_2 / L \quad (2.38)$$

where

$$\Delta X_1 = X_{j1} - X_{i1}, \quad \Delta X_2 = X_{j2} - X_{i2} \quad (2.39)$$

and the initial element length

$$L = (\Delta X_1^2 + \Delta X_2^2)^{\frac{1}{2}} \quad (2.40)$$

The joint and deformation reference frames are moving frames of reference rigidly attached to the joint at the origin of the element (Fig. 11). In the initial state, the joint coordinate system coincides with a global coordinate system originating from that joint, and the deformation coordinate system coincides with the local coordinate system.

Vectors expressed in joint and deformation coordinate systems are identified by barred capital and barred lower-case letters, respectively. Since the joint and deformation reference frames are fixed relative to each other, corresponding vectors are transformed by the A matrix; i.e.,

$$\bar{y} = A\bar{Y} \quad (2.41)$$

where \bar{y} and \bar{Y} are vectors expressed in deformation and joint coordinates, respectively.

The global-joint transformation is given by

$$\bar{Y} = BY \quad (2.42)$$

where

$$B = \begin{bmatrix} c_1 & s_1 \\ -s_1 & c_1 \end{bmatrix} \quad (2.43)$$

$$c_1 = \cos U_{13}, \quad s_1 = \sin U_{13} \quad (2.44)$$

and U_{13} is the rotation of joint 1 about the 3-global axis.

It follows from Eqs. 2.41 & 42 that the global-deformation transformation is defined by

$$\bar{y} = CY \quad (2.45)$$

where

$$C = AB \quad (2.46)$$

The derivation of the element distortion components follows directly from Fig. 11. The relative member-end rotation

$$\bar{u}_3 = U_{j3} - U_{i3} \quad (2.47)$$

where U_{j3} and U_{i3} are the rotations of the joints j and i , respectively.

The relative member-end deflections \bar{u}_1, \bar{u}_2 are expressed in matrix form

$$\bar{u} = C\Delta X^* - \bar{d} \quad (2.48)$$

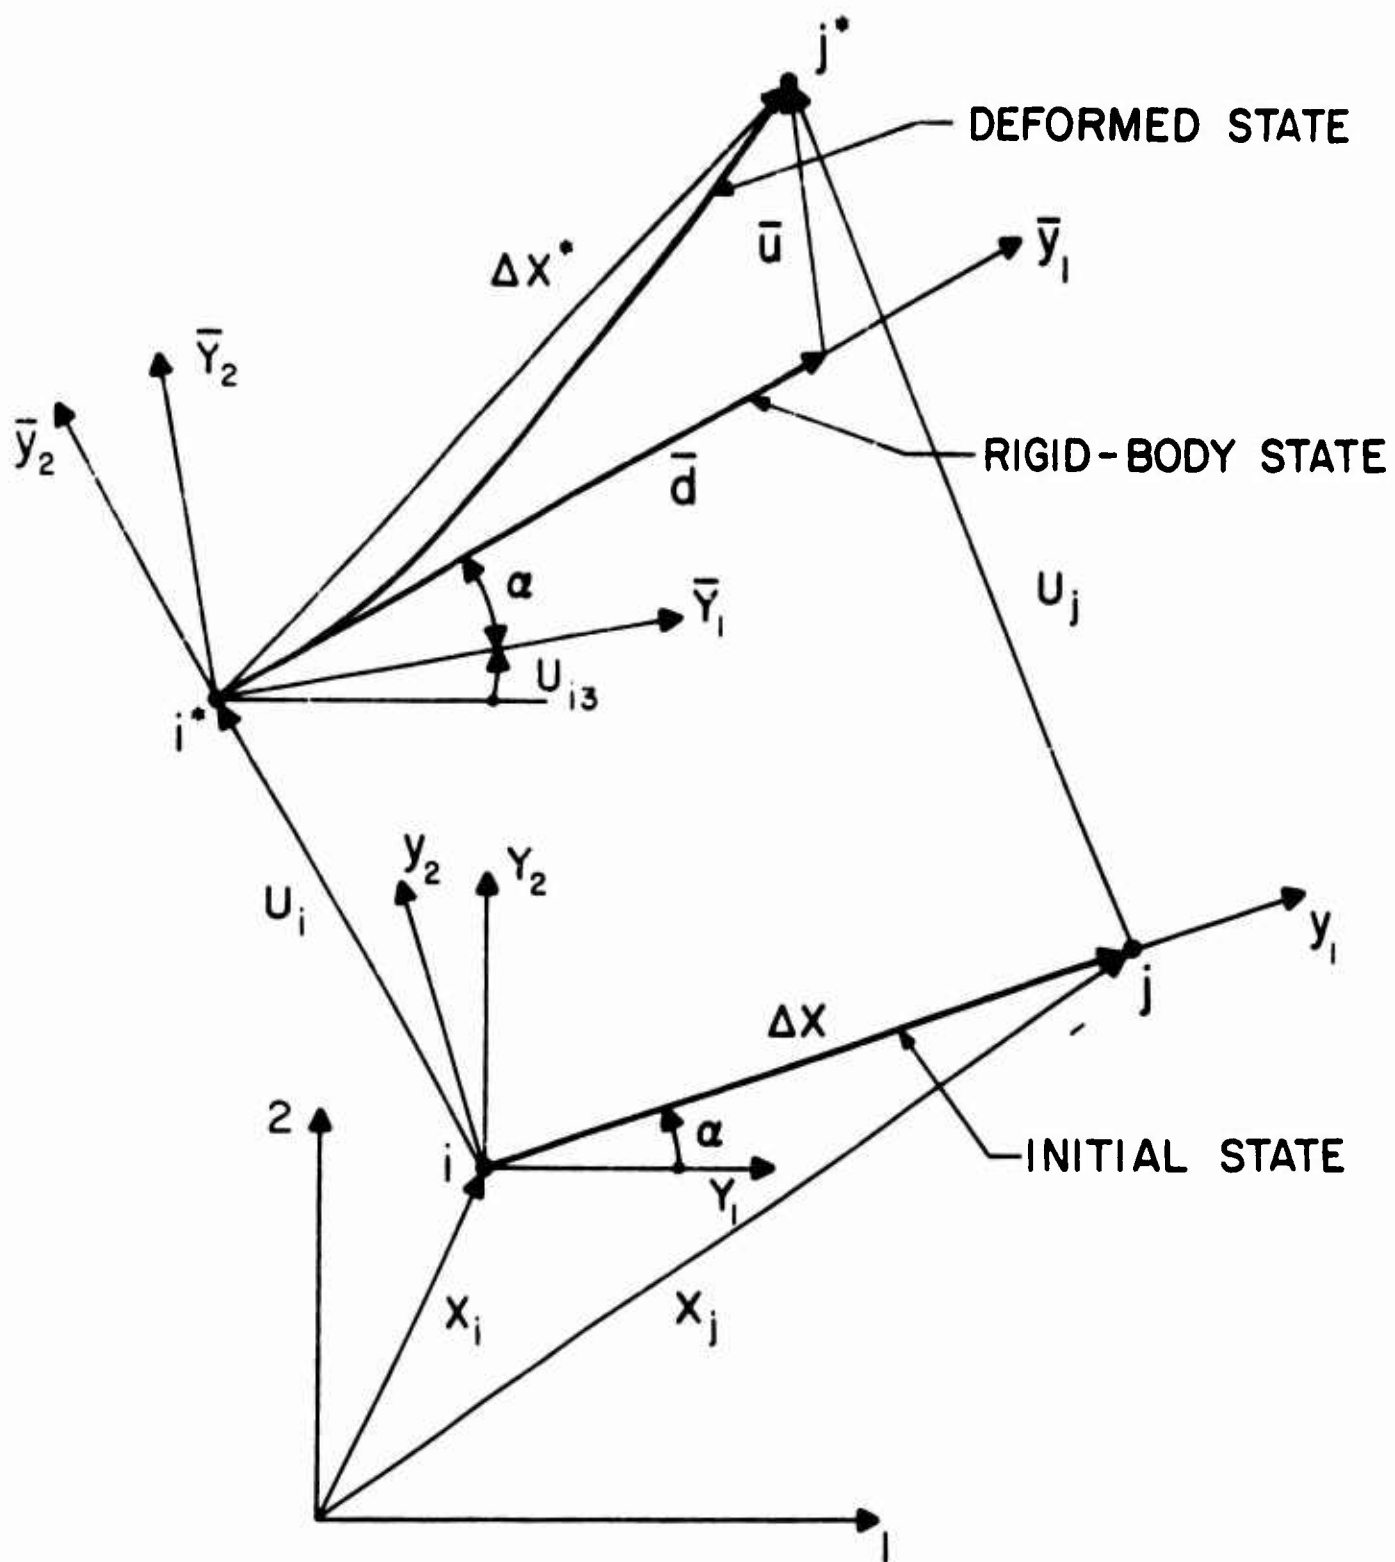


FIG. II. ELEMENT DISTORTION

where

$$\bar{u} = \begin{bmatrix} u_1 \\ u_2 \end{bmatrix} \quad (2.49)$$

$$\Delta X^* = \Delta X + \Delta U \quad (2.50)$$

$$\Delta X = X_j - X_i = \begin{bmatrix} X_{j1} - X_{i1} \\ X_{j2} - X_{i2} \end{bmatrix} = \begin{bmatrix} \Delta X_1 \\ \Delta X_2 \end{bmatrix} \quad (2.51)$$

$$\Delta U = U_j - U_i = \begin{bmatrix} U_{j1} - U_{i1} \\ U_{j2} - U_{i2} \end{bmatrix} = \begin{bmatrix} \Delta U_1 \\ \Delta U_2 \end{bmatrix} \quad (2.52)$$

and

$$\bar{d} = \begin{bmatrix} L \\ 0 \end{bmatrix} = A \Delta X \quad (2.53)$$

In Eqs. 2.51-53, X_i , X_j are the joint position vectors; U_i , U_j are the joint deflection vectors; and \bar{d} defines the rigid-body motion of the element. With the aid of Eqs. 2.46, 50, & 53, Eq. 2.48 can be reduced to a form suitable for numerical evaluation:

$$\bar{u} = A(D\Delta X + B\Delta U) \quad (2.54)$$

where

$$D = B - I = \begin{bmatrix} -2s_{12}^2 & s_1 \\ -s_1 & -2s_{12}^2 \end{bmatrix} \quad (2.55)$$

$$s_{12} = \sin(\theta_{12}/2) \quad (2.56)$$

and I is the identity matrix. For infinitesimal displacements (i.e., $s_{ij} = u_{ij}$, $c_i = 1$, $s_{ij}^2 = 0$, $u_{ij} \Delta u_j = u_{ij} \Delta u_j^2 = 0$), Eq. 2.54 reduces to

$$\ddot{u} = A(EAX + AU) \quad (2.57)$$

where

$$E = \begin{bmatrix} 0 & u_{i3} \\ -u_{i3} & 0 \end{bmatrix} \quad (2.58)$$

2.3.2 STABILITY OF EQUILIBRIUM

As described in section 3.2, the search for the equilibrium state corresponding to a set of prescribed forces is governed by the principle of least action; i.e., at an equilibrium state the energy function assumes a relative minimum. Thus, if an equilibrium state is found, it is a stable equilibrium state.

2.4 FAILURE CRITERIA

An assemblage of elements may experience element and system failure. Fracture, the limit of continuous change of state [4], defines element failure. System failure means collapse of the assemblage.

2.4.1 ELEMENT FAILURE

"Structure-sensitive" properties of a material, such as the fracture strength, are essentially determined by local imperfections in the group structure of the material; consequently, they exhibit a considerably greater degree of variability than "structure-insensitive" properties, such as elastic constants [4]. Freudenthal based this

explanation of material behavior on statistical principles.

Although the literature reveals significant variations in the fracture strength of concrete and reinforced concrete elements, the corresponding strength criteria are seldom based on probabilistic models; i.e., they do not deal with these inherent uncertainties explicitly. In conventional design, the problem of uncertain failure strengths is usually resolved by avoiding such failures rather than by predicting them. The underlying philosophy is to produce ductile structures. For instance, the ultimate moment of an underreinforced concrete beam is governed by the yield strength of the steel. Consequently, the significant variability of the crushing strength of the concrete has little effect on the ultimate flexural strength of the reinforced concrete beam.

In this project, the complete structural response to actions (including system failure) must be predicted. Under static actions, system instability without element failure is possible (e.g., the formation of a collapse mechanism) but perhaps not probable. In the dynamic state, it may not be possible to predict the collapse of the system until the collapse process has been initiated, in which case element failure is probable. In any event, element failure criteria are required.

Since fracture appears to be a probabilistic phenomenon which is not modeled explicitly, it is monitored via lower-bound criteria. When the possibility of fracture is detected, the user must decide whether to base element failure on the conservative lower-bound

criterion or to modify the criterion to yield more probable failure predictions (see appendix B). This procedure requires the user to recognize and deal with the uncertainties inherent in failure criteria.

Element failure criteria are resolved, according to the failure mechanisms, into micro and macro criteria. Micro criteria are formulated on the basis of explicit states at a point, such as the strain state. Macro criteria are expressed in the form of empirical relations, involving stress-resultants and element properties.

Micro criteria predict primary failures, such as crushing and cracking of concrete and fracture of steel, induced by excessive normal strains. The normal strains are caused by flexural and axial distortions. Crushing of concrete may occur in the compression zone of unconfined concrete; it may also take place in conjunction with compression steel "buckling" in confined concrete. Cracking may lead to failure if it initiates in an unreinforced region of a beam in flexure or if the entire cross-section is in tension. Fracture of steel is mainly associated with very light reinforcement.

Macro criteria are concerned with shear-flexure failures [1] which are precipitated by the formation of a diagonal tension crack; the resulting failures are called diagonal-tension, shear-compression, and shear-tension failures. The nominal average shear stress is used as a measure of the diagonal tension strength. For unreinforced webs the occurrence of a diagonal tension crack is regarded as element failure. Although diagonal tension cracks tend to stabilize in short and intermediate-length beams, the crack stabilization mechanism is not well enough understood to warrant utilization of the reserve

strength associated with shear-compression and shear-tension failures. For beams with appropriate web reinforcement, the web reinforcement assures the stabilization of the diagonal tension crack; however, yielding of the web reinforcement can lead again to the type of shear failures experienced by the unreinforced beam.

A classification of all possible failure modes is presented in appendix B. In addition, lower bound criteria are stated, and modifications are formulated for the selection of more probable failure criteria.

2.4.2 SYSTEM FAILURE

System failure can be linked to instability of equilibrium. Stability is the property of equilibrium to sustain disturbances. This means that a stable system remains functional in the perturbed state. Degree of stability of equilibrium is a measure of the disturbances an equilibrium state can sustain [6]. If an equilibrium state is unstable relative to a particular disturbance, the degree of stability is zero.

The solution process employed in this analysis converges only to stable equilibrium states. Hence, the problem is not to ascertain stability of equilibrium but to predict whether an equilibrium state exists for a prescribed set of actions. The concept of degree of stability of equilibrium serves as a basis for this prediction. The "average curvature" of the work function at the equilibrium state is selected as a measure of degree of stability of equilibrium. The computation of the average curvature is based on the values of the curvatures of the work function at the equilibrium state in the

direction of the generalized coordinates. The average curvature is not likely to be zero at an unstable equilibrium state since equilibrium is unstable if the minimum principal curvature is zero. However, the rate of change of a load parameter with respect to the average curvature approaches zero at an unstable equilibrium state. Hence, this rate of change is an indicator of the imminence of instability.

The relation between degree of stability of equilibrium and load level is depicted in Figure 12 ; for the single-degree-of-freedom system, the curvature of the work function at the equilibrium state does approach zero at the limit load, p^* . The continuous curve over the domain $0 \leq x < x^*$ represents stable equilibrium states, and the broken curve over the domain $x > x^*$ represents unstable equilibrium states. The decrease in degree of stability of equilibrium with increasing load is illustrated by the work-function curves corresponding to the equilibrium states, x_1 , x_2 , x^* . The respective curvatures at the equilibrium points decrease monotonically to zero. For a load in excess of the limit load, e.g., $p = p_3$, no equilibrium state exists, and the solution process employed in this study cannot converge.

As the unstable equilibrium state of the system is approached, a load increment could easily push the load beyond the limit load. To prevent a lengthy search for an equilibrium state that does not exist, the solution process is terminated after the deviation from the last equilibrium state exceeds a prescribed bound.

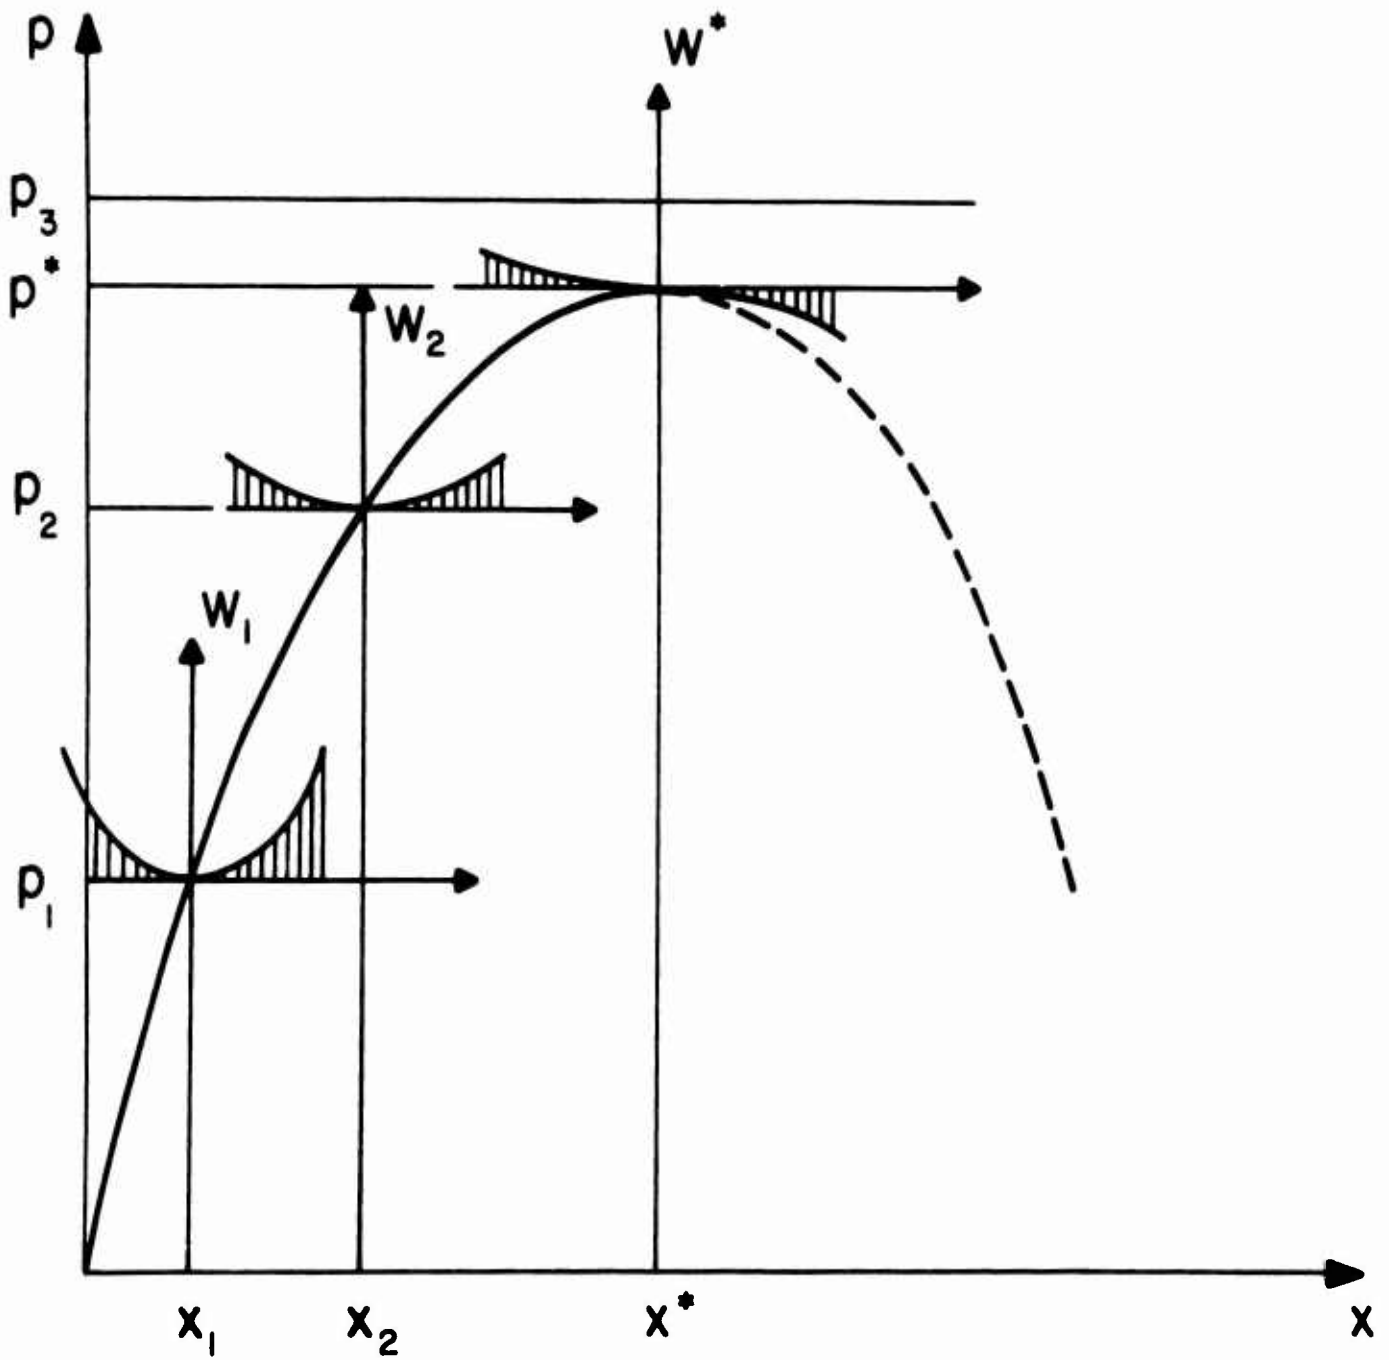


FIG. 12. DEGREE OF STABILITY

2.5 LIMITATIONS

The principal limitations and approximations of the mathematical model of the skeletal reinforced concrete structure are summarized below:

1. The element model is subject to the standard limitations associated with the discretization approach of the finite element method (e.g., internal element displacements are expressed approximately in terms of the nodal displacements; distributed loads are replaced by "equivalent" nodal forces).
2. Plane sections are assumed to remain plane and normal to the deformed reference axis of the reinforced concrete beam.
This assumption appears to be reasonable up to the formation of diagonal tension cracks of unreinforced webs [16], which represent limits of continuous change of state of the element.
3. Normal strains and rotations are assumed to be "small" in the sense that their squares are negligible with respect to unity [3, 11]; i.e., they are regarded to be infinitesimals. These limitations are acceptable since the fracture strains of the materials modeled in this project meet this requirement, and the rotations can be controlled through element subdivision. Shear distortions are not modeled explicitly; the indication is that a modification of the gross element model to include shear deformations is likely to impair the quality of the model.
4. The constitutive laws governing material behavior are described by deterministic models. Consequently, they represent at

best the statistical mean of the material properties and do not reflect the significant randomness characteristic of some properties such as the fracture strength.

5. Energy computation is based on the assumption that no "load reversals" occur during a time (or load) increment of the solution process. Moreover, the computation of the internal energy is based on the evaluation of the internal energy densities at a discrete number of points in the beam element. This introduces another discretization error, which vanishes only in the limit.
6. Element failures precipitated by material fractures are inherently random phenomena which can only be monitored by lower bound criteria in a deterministic analysis. In the event that structural collapse is strongly influenced by element failures (as in contrast to the formation of a "plastic" collapse mechanism), the quality of this prediction by deterministic methods is questionable.

SECTION 3

RESPONSE

The response of the system model to actions is sought at a discrete number of points in time. The solution process, formulated by Melosh and Kelley [9], is a closed iterative process within two successive time points: The state of the system is assumed to be known at the beginning and is sought at the end of the time step. Thus, if the state of the system is known at one point in time, the response determination proceeds like a chain reaction through successive discrete points.

The solution process comprises two fundamental concepts:

1. discretization of motion
2. work-function minimization.

The motion, time functions of the generalized system coordinates, is discretized via the finite element method [17]; this process is analogous to Newmark's β -method [10]: Each displacement function is completely defined over a time step by three initial conditions, which are known, and one end condition, which is the desired displacement at the end of the time step. The work function [7], a scalar function that contains implicitly all the forces acting on the system (applied, inertia, internal), is expressed in terms of the unknown system coordinates at the end of the time step. The desired system configuration is obtained by minimization of the work function, which assumes a relative minimum at the dynamic equilibrium state.

Function minimization is based on Stewart's modification of Davidson's method [13]. A measure of the quality of the response

predictions is provided through error controls linked to automatic time-step selections.

3.1 DISCRETIZATION OF MOTION

The time domain is subdivided into time segments Δt , and the displacement functions are approximated over each subdomain by a finite power series of the form

$$x_i(t) = a_{i0} + a_{i1}t + a_{i2}t^2/2 + a_{i3}t^3/6, \quad 0 \leq t \leq \Delta t \quad (3.1)$$

where x_i represents the i^{th} generalized system coordinate, and t is the normalized time coordinate. The constant coefficients in Eq. 3.1 are determined on the basis of the following end conditions:

$$x_{ai} = x_i(0) \quad (3.2a)$$

$$\dot{x}_{ai} = \frac{d}{dt} x_i(0) \quad (3.2b)$$

$$\ddot{x}_{ai} = \frac{d^2}{dt^2} x_i(0) \quad (3.2c)$$

$$x_{bi} = x_i(\Delta t) \quad (3.2d)$$

where x_{ai} , \dot{x}_{ai} , \ddot{x}_{ai} denote the displacement, velocity, acceleration, respectively, at the beginning of the time step, and x_{bi} denotes the displacement at the end of the time step. It follows from Eqs. 3.1 and 3.2 that the displacement and acceleration functions can be expressed over the domain $[0, \Delta t]$ in the form

$$x_i(t) = x_{ai} + \dot{x}_{ai}t + \ddot{x}_{ai}t^2/2 + \beta_i t^3/6 \quad (3.3)$$

$$\ddot{x}_1(t) = \ddot{x}_{a1} + \beta_1 t \quad (3.4)$$

where

$$\beta_1 = 6(x_{b1} - x_{a1} - \dot{x}_{a1}\Delta t - \ddot{x}_{a1}\Delta t^2/2)/\Delta t^3 \quad (3.5)$$

3.2 WORK-FUNCTION MINIMIZATION

Conditions of dynamic equilibrium are established on the basis of the principle of virtual work, which states that the vanishing of the virtual work for all possible virtual displacements represents a sufficient condition of equilibrium; i.e.,

$$\delta W = 0 \quad (3.6)$$

for all independent virtual displacements is a sufficient condition of equilibrium. The total virtual work can be expressed as

$$\delta W = \delta W_e - \delta U \quad (3.7)$$

where δW_e represents the virtual work of external forces and δU denotes the first variation in the internal energy of the system:

$$\delta W_e = \delta x_b^T p_b \quad (3.8)$$

$$\delta U = \delta x_b^T r_b \quad (3.9)$$

$$p_b = f_b + f_b^e - m\ddot{x}_b \quad (3.10)$$

and the i^{th} component of r_b is

$$r_{bi} = \frac{\partial U}{\partial x_i}(\Delta t) \quad (3.11)$$

The subscript b in Eqs. 3.8-11 signifies that the corresponding variables are evaluated at the end of the time step, at $t = \Delta t$; x_b , \ddot{x}_b denote the generalized displacement, acceleration vectors, respectively; m is a diagonal mass matrix; p_b is the generalized external force vector, which consists of the applied, f_b , equivalent, f_b^e , and inertia, $-m\ddot{x}_b$, force vectors; r_b represents the generalized internal force vector, whose components are the partial derivatives of the internal energy with respect to the generalized coordinates. The superscript T signifies transposition. Eqs. 3.6-9 lead to the condition

$$\delta x_b^T (p_b - r_b) = 0 \quad (3.12)$$

which yields the equilibrium equation

$$p_b - r_b = 0 \quad (3.13)$$

In the vicinity of the equilibrium state corresponding to the beginning of the time step, U is a function of the generalized coordinates (cf. section 2.2.4). Moreover p_b is a function of x_b by virtue of Eqs. 3.4, 5. Thus, the equilibrium equation, Eq. 3.13, is a function of x_b .

The unknown generalized coordinates at the end of the time step are not obtained by direct solution of Eq. 3.13 but by minimization of the corresponding work function

$$W(x_b) = x_b^T p_b - U(x_b) \quad (3.14)$$

The stationary condition, Eq. 3.6, which leads to the equation of dynamic equilibrium is also a minimum condition. On the basis of the principle of least action [7], the work function W assumes a relative minimum at x_b , the solution of Eq. 3.13.

3.3 PROCESS ERRORS

There are essentially two sources of error in the solution process [9]: truncation error and iteration error. The truncation error is induced by the approximate representation of the displacement function over a time step by a finite power series. The truncation error decreases with the size of the time step and vanishes in the limit; hence, it can be controlled by varying the length of the time step. The iteration error arises in the minimization process, which converges in the limit to the exact solution. Hence, the iteration error can be made arbitrarily small by a sufficiently large number of iterations.

The force imbalance at the mid-point of the time step is selected as a basis for a measure of the truncation error. It follows from Eq. 3.13 that the unbalanced i^{th} generalized force component

$$\psi_i(t) = p_i(t) - r_i(t), \quad 0 \leq t \leq \Delta t \quad (3.15)$$

The relation

$$e_i(t) = [\psi_i(t)x_i(t)]/W(t) \quad (3.16)$$

transforms the force imbalance into a relative energy imbalance.

Denote

$$e_a = \max |e_i(0)| \quad (3.17a)$$

$$e_{ab} = \max |e_i(\Delta t/2)| \quad (3.17b)$$

$$e_b = \max |e_i(\Delta t)|, \quad i = 1, 2, \dots, n \quad (3.17c)$$

e_a, e_b constitute measures of the iteration error at the beginning and end of the time step, respectively, and e_{ab} is a measure of the truncation and iteration errors at the mid-point; n is the number of generalized coordinates. If one assumes that the iteration error varies linearly over the time step, a measure of the truncation error is obtained in the form (cf. Fig. 13)

$$e_T = e_{ab} - (e_a + e_b)/2 \quad (3.18)$$

The length of the time step is governed by the following inequality

$$e_l < e_T < e_u \quad (3.19)$$

where e_l and e_u define lower and upper bounds on the truncation error measure, respectively. The time step is increased if $e_T < e_l$ and decreased if $e_T > e_u$. The lower bound is imposed to assure computer accuracy; i.e., to assure that the time step is large enough to produce measurable changes in the response. The relation between computer error, truncation error, and step length is depicted in Fig. 14 . The accuracy of the solution process is apparently insensitive to variations in Δt over the domain $(\Delta t_1, \Delta t_2)$. The most economical step is near Δt_2 .

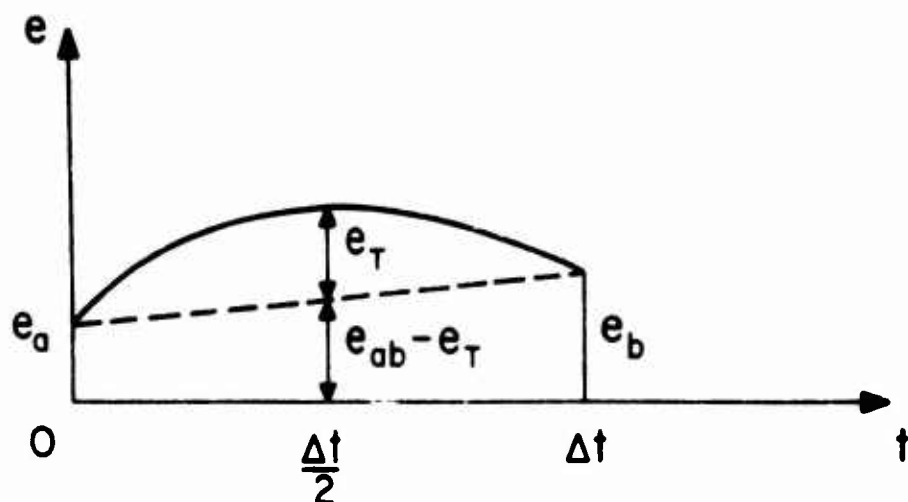


FIG. 13. TRUNCATION & ITERATION ERRORS

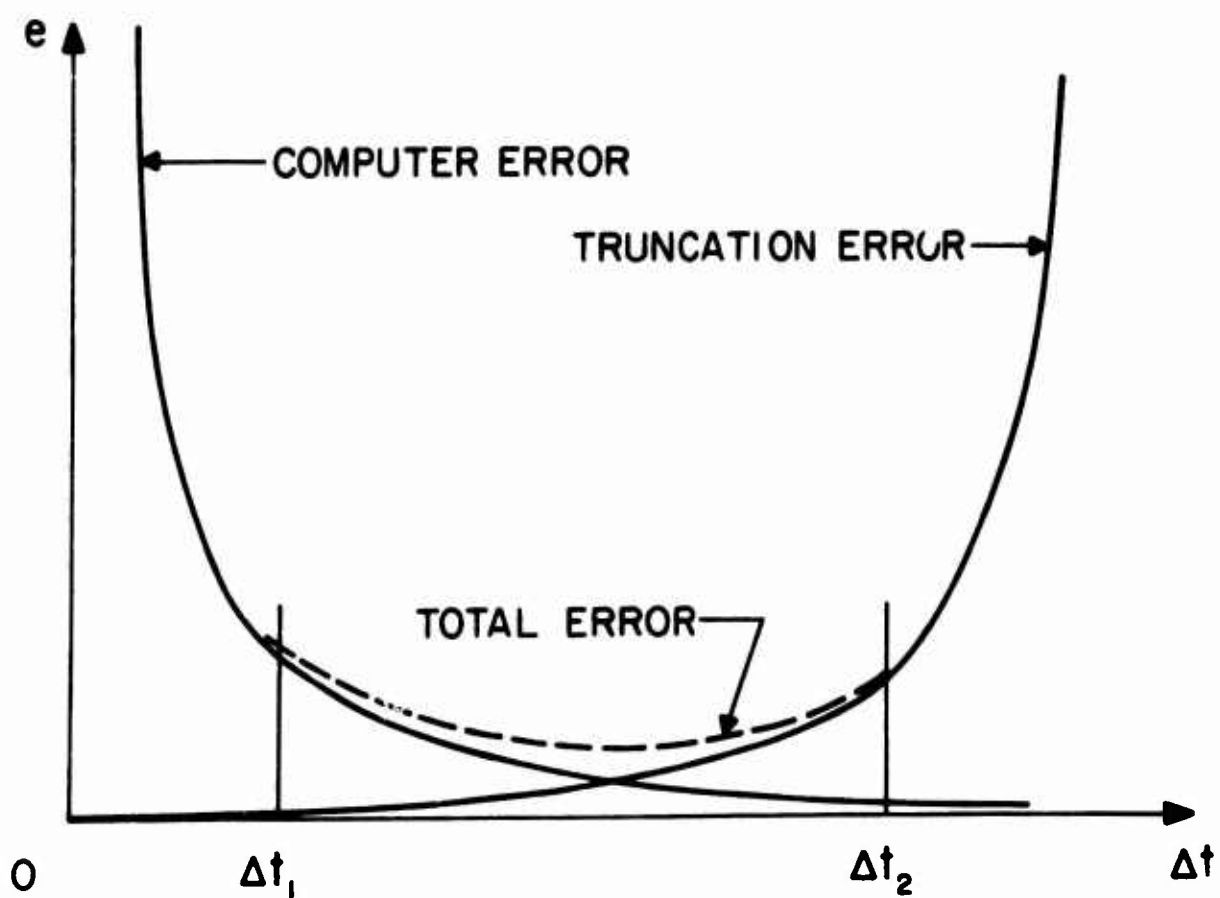


FIG. 14. COMPUTER & TRUNCATION ERRORS

A direct measure of the iteration error is provided by the maximum absolute value of the unbalanced generalized force component at the end of the time step

$$\psi_b = \max |\psi_i(\Delta t)| \quad , \quad i = 1, 2, \dots, n \quad (3.20)$$

The minimization process is continued until

$$\psi_b \leq \psi_u$$

where ψ_u is a prescribed upper bound on the force imbalance.

SECTION 4

SUMMARY

This report describes the mathematical models and the solution process which form the basis of the computer program SINGER. The function of SINGER is to predict the behavior of plane skeletal reinforced concrete structures in their environments. Of primary interest is the transient nonlinear response including element failures and structural collapse.

The principal features of the mathematical models and the solution process are summarized below:

ACTIONS

Actions, mathematical models of the environment, consist of the self-weight of the structure, distributed and concentrated static and dynamic loads, inertia forces, and support motions. All distributed forces are replaced by equivalent nodal forces. Lumped masses are assigned to the nodal degrees-of-freedom.

SYSTEM MODEL

- a. The structure is represented by an assemblage of line elements (models of reinforced concrete beam-columns) and springs (models of partial joint releases) interconnected at a finite number of nodes.
- b. The state of the system is characterized by the work function, a scalar function that contains implicitly all the forces acting on the system. The work function is uniquely defined in terms

of the generalized coordinates, which must be related to the equilibrium path (motion) when the system behaves nonlinearly.

- c. There is no direct restriction on the magnitude of the generalized coordinates, which consist of nodal-displacements, relative release-displacements, and internal element-displacements. However, relative displacements of nodes linked by elements are limited by the small deformation requirements of the elements. Violations of these limitations can be resolved through subdivision of the elements.
- d. The transformation of the large nodal displacements into relative element displacements is expressed with the aid of two frames of reference: The global frame of reference, which is fixed in space, is used to describe nodal properties (e.g., initial state, displacements, forces); the deformation frame of reference, a moving frame of reference, is used to describe element properties (e.g., strains, stresses, distortions).
- e. In a static analysis, system failure, structural collapse, is linked to instability of equilibrium. In a dynamic analysis, structural collapse is inferred from the motion of the system.

ELEMENT MODEL

- a. The beam-column, the basic structural element, is modeled as a one-dimensional continuum, which is discretized. Axial and flexural deformations are modeled explicitly; only a measure of shear distortions and their significance is provided. Deformations are limited by the assumption that strains and rotations are small relative to unity. Inelastic deformations are modeled up to element

failure. Energy dissipation induced by inelastic behavior accounts for structural damping.

- b. The beam-column effect, the coupling of axial and flexural deformations is represented by the corresponding nonlinear term in the strain-displacement relation. The varying neutral axis, a characteristic of beam-columns, is modeled by admitting normal strain variations along the reference axis. This feature makes it also possible to locate the reference axis anywhere in the longitudinal plane of symmetry of the element; thus it eliminates modeling of joint eccentricities.
- c. Excessive deformations associated with slender elements or "plastic" hinges are controlled by the division of the element into subelements.
- d. Constitutive laws for concrete (unconfined and confined) and reinforcing steel are described in the form of piecewise linear stress-strain curves. Material behavior under monotonic and cyclic loading is modeled.
- e. Element failure, which is defined as the limit of continuous change of state, is predicted on the basis of lower-bound criteria. Modifications of these criteria are formulated to permit more probable failure predictions.

RESPONSE

The solution process initiates at a point where the state of the system is completely defined and proceeds along discrete points of the motion: The time function of each generalized coordinate is approximated within two successive points in time, the time step, by a finite

power series whose undetermined coefficient corresponds to the unknown displacement at the end of the time step. This representation of the motion permits one to formulate the work function of the system at the end of the time step in terms of the unknown generalized coordinates. The desired equilibrium state is obtained by minimization of the work function.

LIMITATIONS

Spatial and temporal discretization and the inherent variability of material properties form the principal sources of error. Spatial discretization errors can be controlled through the subdivision of elements. Although internal energy computation is based on a fixed mesh imposed on the longitudinal plane of the element, the reduction of the element length results in a mesh refinement, and, hence it improves the accuracy of the energy computation. Temporal discretization errors can be controlled by varying the size of the time step. The constitutive laws governing material behavior are described by deterministic models, which do not reflect the randomness of some properties such as the fracture strength. Consequently, element failures precipitated by material fracture are monitored via lower-bound criteria.

REFERENCES

1. ACI-ASCE Committee 426, "The Shear Strength of Reinforced Concrete Members," Journal of the Structural Division, ASCE, Vol. 99, St. 6, June 1973, pp. 1091-1187.
2. Bogner, F. K., Mallett, R. H., Minich, M. D., and Schmit, L. A., Development and Evaluation of Energy Search Methods of Nonlinear Structural Analysis, AFFDL-TR-65-113, WPAFB, Dayton, Ohio, October 1965.
3. Boresi, A. P., Elasticity in Engineering Mechanics, Prentice-Hall, 1965.
4. Freudenthal, A. M., The Inelastic Behavior of Engineering Materials and Structures, John Wiley & Sons, 1950.
5. Fox, L. R., and Stanton, E. L., "Developments in Structural Analysis by Direct Energy Minimization," AIAA Journal, Vol. 6, No. 6, June 1968, pp. 1036-1042.
6. Holzer, S. M., "Degree of Stability of Equilibrium," Journal of Structural Mechanics, to appear.
7. Lanczos, C., The Variational Principles of Mechanics, 4th edition, University of Toronto Press, June 1970.
8. Martin, H. C., Large Deflection and Stability Analysis by the Direct Stiffness Method, Jet Propulsion Lab., Calif. Inst. Technol., Tech. Rept. 32-931, 1966.
9. Melosh, R. J., and Kelley, D. M., "Prediction of Nonlinear Transient Response of Structures," ASME/AIAA 10th Structures, Structural Dynamics, and Materials Conference, New Orleans, La., 14-16 April 1969.
10. Newmark, N. M., "A Method of Computation for Structural Dynamics," Journal of the Engineering Mechanics Division, ASCE, Vol. 85, EM3, July 1959, pp. 67-94.
11. Novozhilov, V. V., Foundations of the Nonlinear Theory of Elasticity, Graylock Press, 1953.
12. Przemieniecki, J. S., Theory of Matrix Structural Analysis, McGraw Hill, 1968.
13. Stewart, G. W., "A Modification of Davidon's Minimization Method to Accept Difference Approximations of Derivatives," Journal of the Association of Computing Machinery, Vol. 14, No. 1, January 1967, pp. 72-83.

14. Stricklin, J. A., and Haisler, W. E., "Survey of Solution Procedures for Nonlinear Static and Dynamic Analysis," International Conference on Vehicle Structural Mechanics: Finite Element Application to Vehicle Design, Society of Automotive Engineers Inc., Two Pennsylvania Plaza, N.Y., N.Y. 10001, 1974, pp. 1-17.
15. Thomas, G. B., Calculus and Analytic Geometry, Addison-Wesley, 1956.
16. Watstein, D., and Mathey, R. G., "Strains in Beams Having Diagonal Cracks," Journal of the American Concrete Institute, Dec. 1958, pp. 717-728.
17. Zienkiewicz, O. C., The Finite Element Method in Engineering Science, McGraw-Hill, 1971.

NOTATION

- A, A_s = area, effective shear area of beam
 A, B, C, D, E = transformation matrices
 B, \bar{B} = compatibility matrices
 c = $\cos \alpha$
 c_i = $\cos U_{i3}$
 \bar{d} = rigid-body configuration of element in deformation coordinates
 e_i = energy imbalance corresponding to i^{th} generalized force component
 e_a, e_b = measures of iteration error at the beginning, end of time step Δt
 e_{ab} = measure of truncation and iteration errors at $\Delta t/2$
 e_T = measure of truncation error
 e_l, e_u = lower, upper bound on e_T
 E, G = Young's, shear modulus of elasticity
 f_a, f_b = element force vectors at the a, b-end
 f_{a1}, f_{b1} = element forces at the a, b-end
 f_b, f_b^e = generalized applied, equivalent force vector at the end of time step Δt
 h = height of beam
 I = moment of inertia of beam
 I = identity matrix
 k_o, k_1, k_i = stiffness coefficients
 K_T = tangent stiffness matrix

L = length of beam
 m = diagonal mass matrix
 n = number of generalized coordinates
 p, p_b = generalized external force vector, at the end of time step Δt
 Δp = unbalanced force vector (scalar)
 r_b = generalized internal force vector at the end of time step Δt
 s = $\sin \alpha$
 s_i = $\sin U_{i3}$
 s_{i2} = $\sin (U_{i3}/2)$
 t = time
 t_1, t_2, t_i = specific values of t
 Δt = time step
 u, v = deflections of point $(x, 0)$ on the reference axis
 \bar{u}, \bar{u}_i = element distortion vector, component
 U = internal energy
 δU = 1st variation of internal energy
 U_s = internal energy induced by shear deformations
 U_i = displacement vector of joint i in global coordinates
 U_{i3} = rotation of joint i about 3-global axis
 $\Delta U = U_j - U_i$ = relative joint displacement vector in global coordinates
 U^* = internal-energy density
 U_d^*, U_r^* = dissipative, recoverable internal-energy density
 U_1^*, U_2^* = internal-energy density at time t_1, t_2

U_{12}^* = change in internal-energy density during the time interval t_1, t_2
 V = shear force
 V = volume
 W = work function
 δW = total virtual work
 δW_e = external virtual work
 x, y = element deformation axes
 x, x_i = generalized coordinate vector, component
 x_n = n^{th} trial solution
 Δx_n = correction to x_n
 x_b, \ddot{x}_b = generalized displacement, acceleration vector at the end of time step Δt
 $x_{a1}, \dot{x}_{a1}, \ddot{x}_{a1}$ = displacement, velocity, acceleration at the beginning of time step Δt
 x_{bi} = displacement at the end of time step Δt
 δx_b = virtual displacement vector at the end of time step Δt
 X_i, X_j = position vectors of joints i, j in global coordinates
 X_{ij} = global coordinate of joint i in j direction
 $\Delta X = X_j - X_i$ = relative position vector in the initial state
 $\Delta X_1, \Delta X_2$ = components of ΔX
 $\Delta X^* = \Delta X + \Delta U$ = relative position vector in the displaced state
 α = angle between 1-local axis of element and 1-global axis
 β_i = coefficient
 γ = shear deformation factor

- δ = virtual variation
- ϵ_0, ϵ = normal strains
- ϵ_1 = normal strain at time t_1
- η, ξ = nondimensional element deformation axes
- κ = shape factor
- σ = normal stress
- ϕ_1 = element shape function
- $\phi_1' = \frac{d\phi_1}{d\xi}$
- $\phi_1'' = \frac{d^2\phi_1}{d\xi^2}$
- ψ_b = measure of iteration error at the end of time step Δt
- ψ_i = i^{th} unbalanced generalized force
- ψ_u = upper bound on ψ_b

APPENDIX A

CONSTITUTIVE LAWS FOR CONCRETE AND STEEL

This appendix summarizes the uniaxial stress-strain curves used in describing the material response of a single fiber of either concrete or steel. The curves described are the default stress-strain curves generated by the program. The user has the option to specify others if he so desires.

A.1 ASSUMPTIONS ON MATERIAL BEHAVIOR

The following assumptions have been made in developing the constitutive models presented herein:

1. Stresses in the concrete and steel are uniquely related to the strains. For direct tension and compression tests under short time loading, this is correct. This permits the calculation of the stresses in the concrete and steel once the strains are known.
2. The stress-strain relationship for compressed concrete not confined by lateral reinforcement is identical to that for concrete in direct compression. The neglect of a strain gradient effect in the compression zone of a beam is justified by adequate correlation between experimental results and many flexural theories based on this assumption.
3. The stress-strain relationship for compressed concrete confined by lateral reinforcement has a strength greater than the unconfined direct compression strength. Data are presented in section A.2 which supports and quantifies this assumption.

4. Tension stress in concrete is neglected. The magnitude of the tensile stresses in the concrete is small compared to that in the reinforcement and their neglect will not significantly change the results of the analysis.
5. Concrete stress-strain curves are valid for normal weight concrete and compressive strengths between 2500 psi and 8000 psi. Lightweight and heavyweight concretes are excluded. There is sufficient test data to generalize the curves presented to only a limited range of concrete strengths.
6. The stress-strain relationships for steel can be determined from tension tests for both the behavior in tension and compression. Complete stress-strain curves, including strain hardening and breaking strengths, are given in Section A.3. These are limited to steels with yield points from 33 ksi to 75 ksi.
7. Creep, shrinkage, and temperature effects are ignored. For short duration loadings, the first two effects can be neglected. The change of material properties with temperature is not sufficiently documented for reinforced concrete and therefore is omitted.
8. Strain rate effects on material response are neglected. This can influence the stress-strain response at local points in the structure. However, it is assumed that the overall response of the structure will not be significantly affected by ignoring this complexity.
9. Adequate lateral support is present to prevent buckling of steel in compression. This assumption is valid as long as the concrete cover is intact. After spalling has taken place, lateral support must be provided by lateral ties or stirrups.

In developing the computer code, checks are made on the above assumptions whenever possible. For example, the concrete compressive strength given must be within the range specified, stirrup spacing is checked against a requirement for prevention of local buckling, etc. If one of the assumptions is violated, a warning is given to the user that he is using the program beyond its intended application.

A.2 STRESS-STRAIN RELATIONSHIP FOR CONCRETE

If concrete is compressed in one direction, it tends to expand laterally. If this expansion occurs freely, the concrete is said to be "unconfined" and principal compressive stresses exist in one direction only. On the other hand, if such lateral expansion is restricted, the concrete is said to be "confined" and, as a result of such restriction, compressive stresses develop in all directions. Up to the stage corresponding to crushing the behavior of the concrete is essentially that of the unconfined concrete. Beyond this stage, the concrete core bound by lateral reinforcement has greater strength and ductility than the unconfined concrete. Because of these differences, it is necessary to describe stress-strain relationships for both types of concrete.

A.2.1 Stress-Strain Curve for Unconfined Concrete

The default stress-strain curve for unconfined concrete is given in Figure A.1. A non-dimensional plot is not possible because the slope of the descending branch is dependent on the compressive cylinder strength, f'_c . The curve is divided into two portions, AB and BC'. For the region AB, a parabolic expression (represented by a series of straight line segments in the program) given in reference A.1 is used:

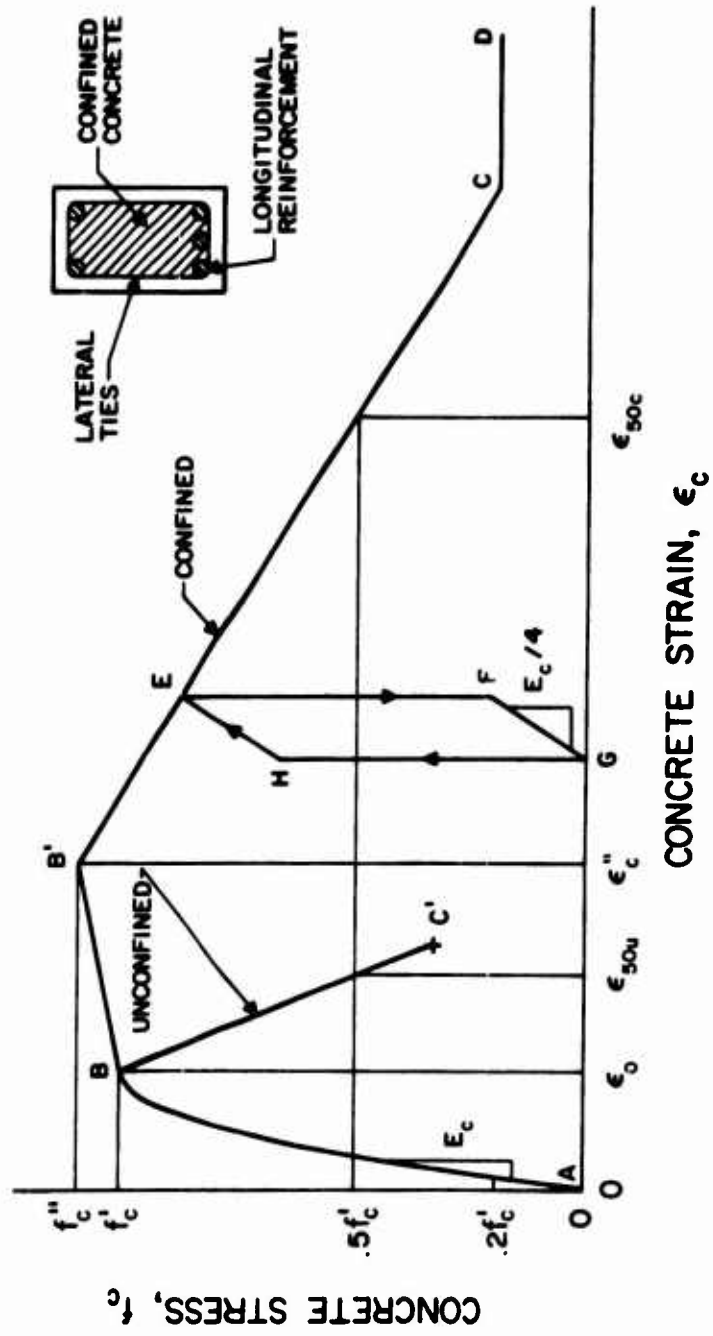


FIG. A. 1: COMPLETE STRESS-STRAIN CURVE FOR CONCRETE

$$f_c = f'_c \left[\frac{2\epsilon_c}{\epsilon_0} - \left(\frac{\epsilon_c}{\epsilon_0} \right)^2 \right] \quad (A.1)$$

in which the strain at maximum stress is assumed to be $\epsilon_0 = 0.002$. It is also assumed that the maximum stress is the cylinder strength f'_c , i.e., the factor 0.85 is not included. The reason for this is that the 0.85 factor was based on column tests without a strain gradient. When a strain gradient is present, such as in a member in bending, observations have shown (reference A.2) that a factor of 1.0 is conservative. The region BC' is defined by a straight line whose slope is determined by the strain ϵ_{50u} , when the concrete stress has fallen to 50% of the cylinder strength of the unconfined concrete. This is given in reference A.3 as

$$\epsilon_{50u} = \frac{3 + 0.002f'_c}{f'_c - 1,000} \quad (A.2)$$

in which f'_c is expressed in pounds per square inch. The straight line is continued until the concrete strain reaches the failure value defined in Appendix B, section B.3.1. At this point the unconfined concrete is no longer effective and is removed from the cross-section.

A.2.2 Stress-Strain Curve for Confined Concrete

The default stress-strain curve for confined concrete is also given in Figure A.1. The curve is divided into four regions and is similar to the curve given in reference A.4. For the region AB, the curve is identical to that given by Eq. A.1.

For the region BB', a modification in the curve of reference A.4 is made to include an increase in compressive strength when lateral ties are present. Recommended increases for this region vary from nearly 50% (reference

A.5) to zero (reference A.6). However, a majority of the researchers indicate that a modest increase is reasonable, and the following expression is used:

$$f''_c = f'_c + \Delta f_c \quad (A.3)$$

in which f''_c = confined concrete compressive strength and Δf_c = increase in compressive strength over the unconfined value. The magnitude of $\Delta f'_c$ is dependent on the confining action of the transverse reinforcement. A theoretical discussion in reference A.5 indicates that the lateral pressure induced is proportional to $p''f''_s$, where p'' = ratio of the volume of lateral reinforcement to the volume of confined concrete and f''_s = unit stress in transverse reinforcement (which is assumed to be equal to the yield stress).

In Figure A.2 are shown the results of tests on rectangular prisms under concentric load from reference A.7 and the modification recommended in reference A.5 for members in flexure. The higher values in each of the concentric load tests are for high strength concretes, the lower values for medium strength concretes. The limits on the bending results are given to show the trend when only a portion of the confined depth of the section, d'' , is in compression (c = depth to the neutral axis). A conservative estimate of the increase in strength is given by the straight line whose equation is:

$$\Delta f_c = \frac{3}{4} p'' f''_y \leq 2000 \text{ psi} \quad (A.4)$$

The upper limit is necessary because of the limited range of the test data.

Corresponding to the increased maximum compressive strength is a confined concrete strain, ϵ''_c , which can be expressed as

$$\epsilon''_c = \epsilon_0 + \Delta \epsilon_c \quad (A.5)$$

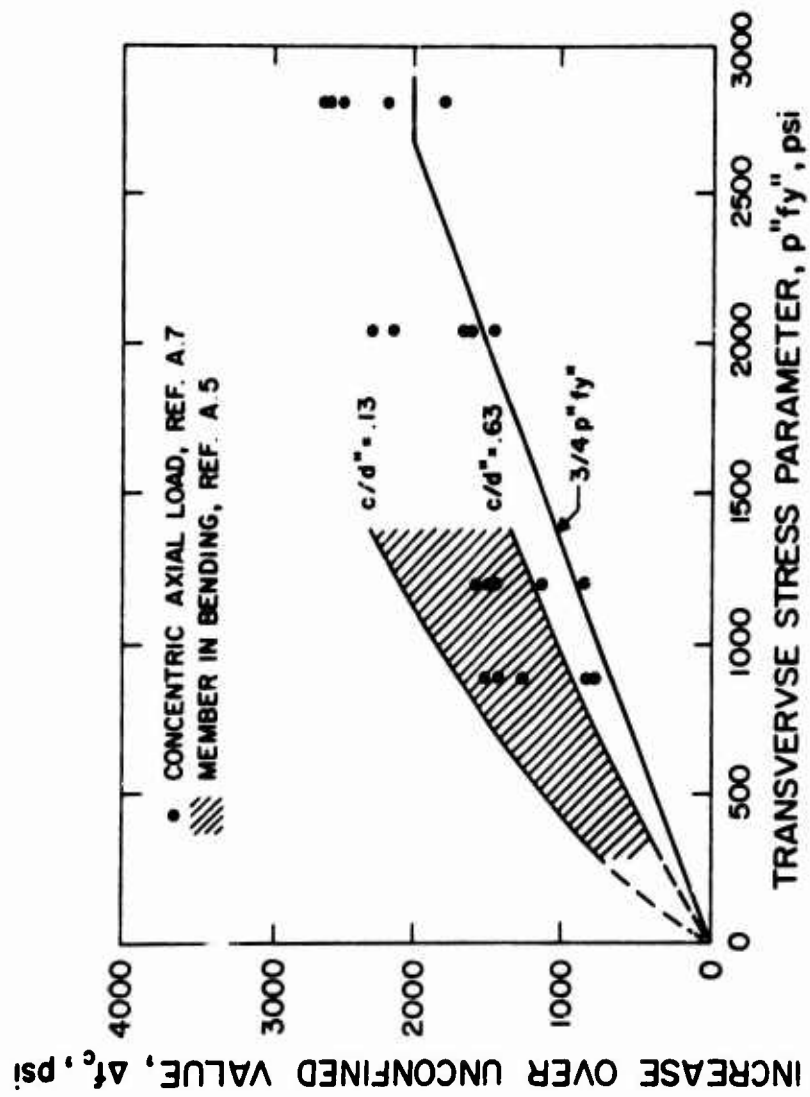


FIG. A.2: ULTIMATE STRENGTH FOR CONFINED CONCRETE

where $\Delta\epsilon_c$ = increase in strain at maximum stress over the unconfined value.

In addition to the volumetric ratio, p'' , reference A.3 indicates that confined concrete strain is dependent on the ratio of the minimum dimension of the confined core to the spacing of the transverse reinforcement, b''/s .

Experimental results from the tests in reference A.8 and the recommended values of reference A.5 are shown in Figure A.3 for the increase in confined concrete strain. Because of the scatter in the data a lower bound straight line given by the following expression is used:

$$\Delta\epsilon_c = 0.17p'' \sqrt{b''/s} \leq 0.008 \quad (A.6)$$

The upper limit corresponds to a total strain before reaching the descending branch of 0.01.

For the descending branch B'C, the slope is established by the strain, ϵ_{50C} , at $0.5f'_c$, for the confined concrete and is given in reference A.4 as

$$\epsilon_{50C} = \frac{3 + 0.002f'_c}{f'_c - 1,000} + \frac{3}{4} p'' \sqrt{b''/s} \quad (A.7)$$

The first term on the right hand side is identical to Eq. A.2, thus the second term represents the increase in the 50% strain for the confined concrete over the value for unconfined concrete. The point C on the descending branch is determined by extending a straight line from B' through the 50% point until the concrete stress has fallen to 20% of f'_c .

For the region CD, it is assumed that the concrete can sustain a stress of $0.2f'_c$ for indefinitely large strains. This has been assumed previously in the analysis used in reference A.3 and member failure occurred (fracture of tensile steel) before the concrete strains became unrealistic.

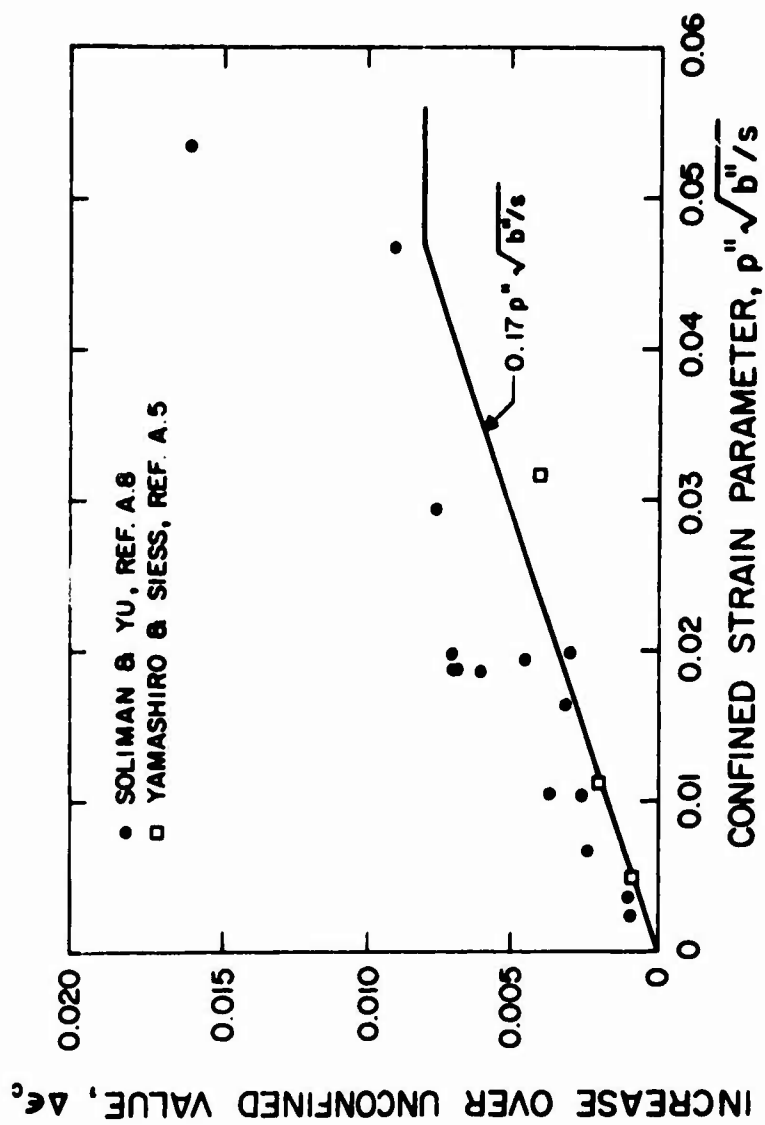


FIG. A. 3: STRAIN AT ULTIMATE STRENGTH FOR CONFINED CONCRETE

A.2.3 Cyclic Loading Response of Concrete

The behavior of concrete under repeated loading is also shown in Figure A.1. Unloading and reloading that occurs before point B' (or point B in the case of unconfined concrete) is assumed to follow the initial tangent slope E_c . Reversed loading on the descending branch of either the unconfined or confined stress-strain curve is referred to as "drop-elastic." For example, on unloading from point E, it is assumed that 0.75 of the previous stress is lost without a decrease in strain (the "drop" portion) and then a linear path of slope $0.25 E_c$ is followed to point G (the "elastic" portion). If the concrete continues to unload, the tensile strains increase without any tensile stress developing. On reloading the strain must regain the value at G before compressive stress can be sustained again. Note that the average slope of the assumed loop between E and G is parallel to the initial tangent modulus of the stress-strain curve.

This representation of the cyclic loading behavior is taken from reference A.4. It can be modified by changing the value of the slope from F to G. A user can input the value of the slope as a constant k times the initial tangent modulus. The value of $k = 0.25$ is the default condition.

A.3 STRESS-STRAIN RELATIONSHIP FOR STEEL

The default stress-strain curves utilized for steel are shown in Figure A.4. These curves cover a yield point, f_y , range from 33 ksi to 75 ksi, and strains from zero to the breaking point. They include two structural steel grades with yield points equal to 33 ksi and 36 ksi. All of the curves have an elastic portion AB with a constant modulus of elasticity, $E_s = 29 \times 10^3$ ksi. The strain at the beginning of yield, ϵ_y ,

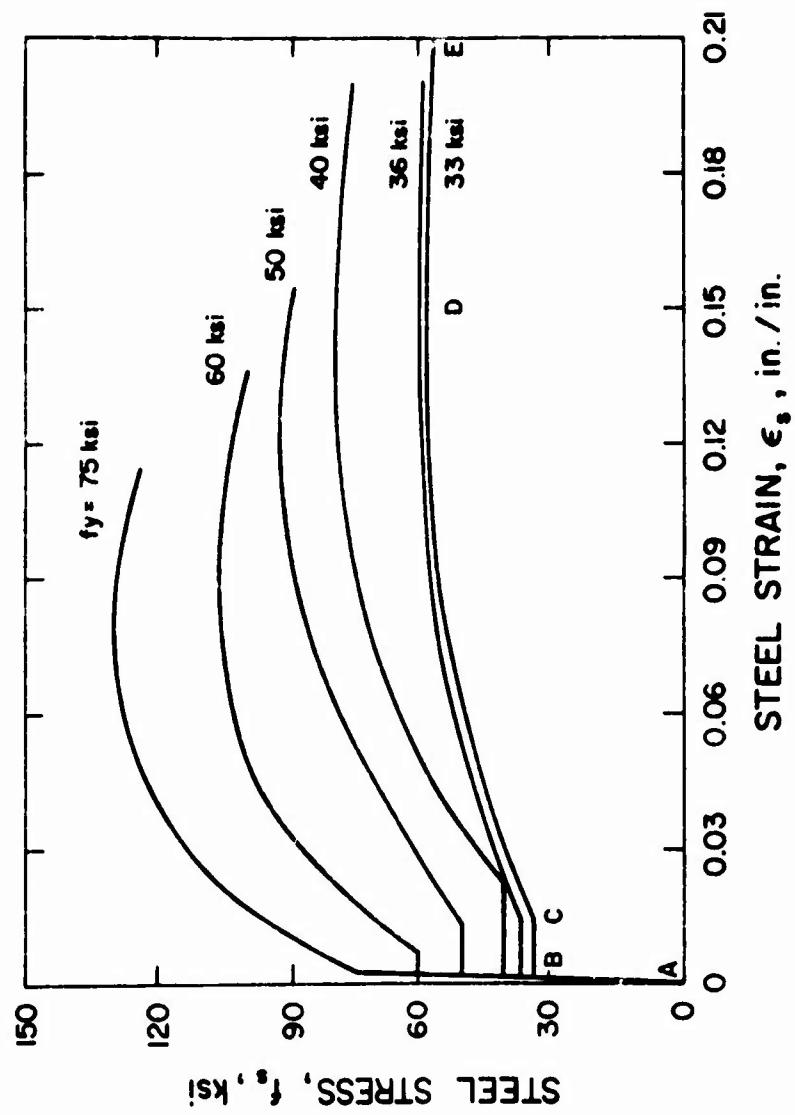


FIG. A. 4 : TYPICAL STRESS-STRAIN CURVES FOR STEEL

is equal to f_y/E_s . The yield plateau BC varies with the yield strength of the steel. Typical values for the strain at which strain hardening begins, ϵ_{sh} , are given in Table 1.

The strain hardening curve CDE reaches a maximum stress, f_u , at a strain, ϵ_u , before dropping off slightly at the breaking strain, ϵ_b . Typical values of these quantities are also given in Table 1. The following expression for the strain hardening portion (represented by a series of straight line segments in the program) was adapted from one developed in reference A.9

$$f_s = f_y \left[1 + \frac{\epsilon_s - \epsilon_{sh}}{\epsilon_u - \epsilon_{sh}} \left(\frac{f_u}{f_y} - 1 \right) \exp \left(1 - \frac{\epsilon_s - \epsilon_{sh}}{\epsilon_u - \epsilon_{sh}} \right) \right] \quad (A.8)$$

Table 1

TYPICAL VALUES FOR STEEL STRESS-STRAIN CURVES

f_y , ksi	f_u , ksi	ϵ_y	ϵ_{sh}	ϵ_u	ϵ_b
33	58	0.00114	0.014	0.15	0.21
36	60	0.00125	0.014	0.15	0.20
40	80	0.00138	0.023	0.14	0.20
50	92	0.00173	0.013	0.12	0.154
60	106	0.00208	0.0060	0.087	0.136
75	130	0.00260	0.0027	0.073	0.115

When the loading is reversed after the yield strain has been reached, the shape of the stress-strain curve is changed because it no longer has a well-defined yield point upon reloading. Figure A.5 shows the general behavior assumed for the steel when reverse loading occurs. On first loading to point 1, the virgin curve described previously is followed. On unloading from point 1 to point 2, the path is parallel to the initial elastic slope. When loading in the opposite direction from point 2 to point 3, the yield point is missing and the curve is described by Eq. A.8 with the origin shifted to point 2. Subsequent cycles of unloading and reloading follow the same pattern and are shown in Figure A.5.

In a previous investigation (reference A.10), a degradation of stiffness with cycles of loading was proposed for the reinforcing steel. However, a study of the original paper (reference A.11) on which the proposal was based revealed that tests were conducted for only one bar size (No. 11) and one yield stress (50 ksi). To extrapolate these results to the general behavior of all bar sizes with a range of yield points from 33 ksi to 75 ksi is not justified. Furthermore, the data of reference A. 11 showed an increase in stiffness in some cycles.

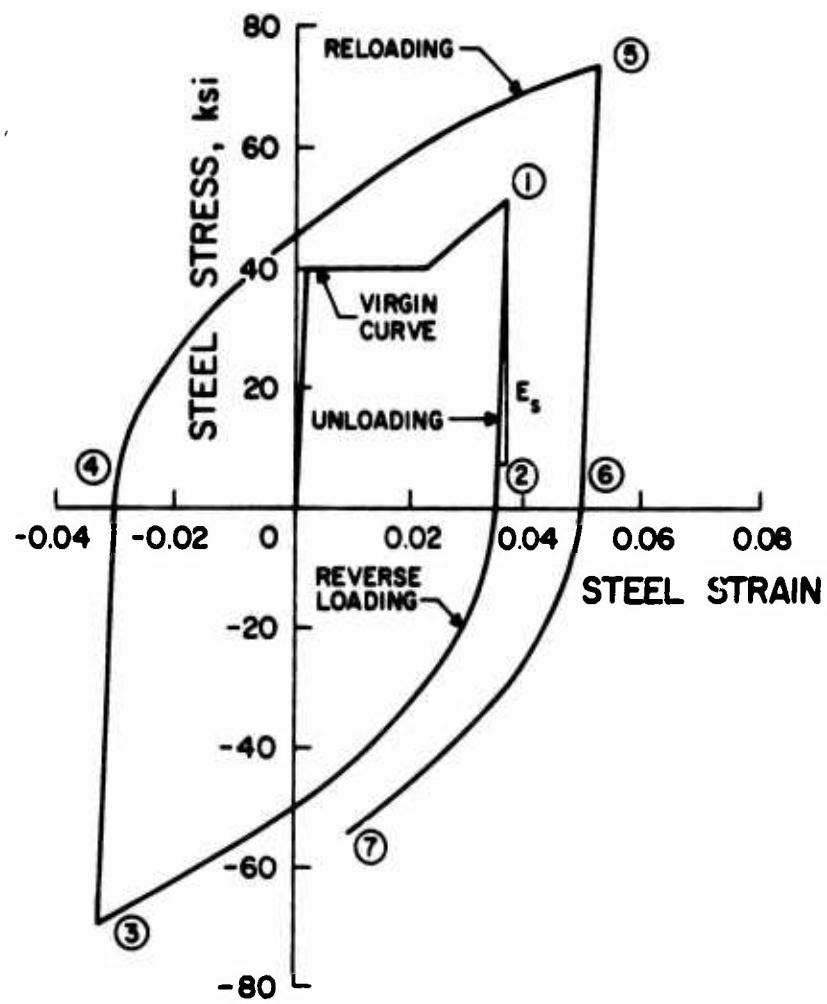


FIG. A. 5: REVERSE LOADING BEHAVIOR OF STEEL

REFERENCES

- A.1 Hognestad, E., A Study of Combined Bending and Axial Load in Reinforced Concrete Members, University of Illinois Engineering Experiment Station, Bulletin No. 399, 1951, p. 128.
- A.2 Sturman, G. M., Shah, S. P., and Winter, G., "Effect of Flexural Strain Gradients on Microcracking and Stress-Strain Behavior of Concrete," ACI Journal, Proceedings, Vol. 62, No. 7, July 1965, pp. 805-822.
- A.3 Kent, D. C., and Park, R., "Flexural Members with Confined Concrete," Journal of the Structural Division, ASCE, Vol. 97, No. ST7, Proc. Paper 8243, July, 1971, pp. 1969-1990.
- A.4 Park, R., Kent, D. C., and Sampson, R. A., "Reinforced Concrete Members with Cyclic Loading," Journal of the Structural Division, ASCE, Vol. 98, No. ST7, Proc. Paper 9011, July 1972, pp. 1341-1360.
- A.5 Yamashiro, R., and Setts, C. P., "Moment Rotation Characteristics of Reinforced Concrete Members Subject to Bending, Shear, and Axial Load," Structural Research Series, No. 260, Civil Engineering Studies, University of Illinois, Urbana, Dec. 1962.
- A.6 Roy, H. E. H., and Sozen, M. A., "Ductility of Concrete," Proceedings of the International Symposium on Flexural Mechanics of Reinforced Concrete, ASCE-ACI, Miami, Nov. 1964, pp. 213-224.
- A.7 Szulczynski, T., and Sozen, M. A., "Load-Deformation Characteristics of Concrete Prisms with Rectilinear Transverse Reinforcement," Civil Engineering Studies, Structural Research Series No. 224, University of Illinois, Sept. 1961.
- A.8 Soliman, M. T. M., and Yu, C. W., "The Flexural Stress-Strain Relationship of Concrete Confined by Rectangular Transverse Reinforcement," Magazine of Concrete Research, Vol. 19, No. 61, Dec. 1967, pp. 223-238.
- A.9 Smith, G. M., and Young L. E., "Ultimate Flexural Analysis Based on Stress-Strain Curves of Cylinders," ACI Journal, Proceedings, Vol. 53, No. 6, Dec. 1956.
- A.10 Brown, R. H., and Jirsa, J. O., "Reinforced Concrete Beams Under Load Reversals," ACI Journal, Proceedings Vol. 68, No. 5, May 1971, pp. 380-390.
- A.11 Singh, A., Gerstle, K. H., and Tulin, L. G., "The Behavior of Reinforcing Steel Under Reversed Loading," Materials Research and Standards, V. 5, No. 1, Jan. 1965, p. 12-17.

NOTATION

E_c	= Young's modulus of elasticity for concrete
E_s	= Young's modulus of elasticity for steel
b''	= breadth of confined concrete cross-section
c	= depth to neutral axis from compressive face
d''	= depth of confined concrete cross-section
k	= unloading constant for concrete hysteresis loop
p''	= volumetric ratio of transverse reinforcement
s	= longitudinal spacing of transverse reinforcement
f_c	= compressive stress in concrete
f'_c	= compressive strength of 6 by 12 in. cylinders
f''_c	= compressive strength of confined concrete
f_s	= stress in longitudinal reinforcement
f''_s	= stress in lateral reinforcement
f_u	= maximum steel stress in strain hardening region
f_y	= yield stress of longitudinal reinforcement
f''_y	= yield stress of lateral reinforcement
Δf_c	= increase of concrete strength over unconfined value
ϵ_b	= breaking strain of longitudinal reinforcement
ϵ_c	= compressive strain in concrete
ϵ''_c	= strain in confined concrete at maximum stress
ϵ_o	= strain in unconfined concrete at maximum stress
ϵ_s	= strain in longitudinal reinforcement
ϵ_{sh}	= steel strain at onset of strain hardening
ϵ_u	= strain corresponding to maximum steel stress
ϵ_y	= yield strain of longitudinal reinforcement
ϵ_{50C}	= confined concrete strain on falling branch at $0.5f'_c$
ϵ_{50u}	= unconfined concrete strain on falling branch at $0.5f'_c$
$\Delta \epsilon_c$	= increase of concrete strain over unconfined value

APPENDIX B

ELEMENT FAILURE CRITERIA

The behavior of the structural system is dependent upon the behavior of each component element since each one contributes to the total energy of the system. The process of failure is also related to the failure of the individual elements. Some provision must be made to define and predict failure in an element. This is the purpose of the element failure criteria.

B.1 DEFINITIONS

Failure of a real concrete member can be associated with an abrupt loss in its ability to resist applied loads. Failure is caused by localized behavior, and it is usually associated with fracture of material.

Failure of the element model is defined as those states which correspond to the physical failure modes of a real member and determine a limit to the continuum model behavior. These states are detected by assigning specific values to certain quantities which can be related to variables in the mathematical model. Since these variables are directly associated with physical behavior, their values must be obtained from test results.

The derived expressions which relate these numerical quantities to the corresponding quantities determined from the element model are referred to as the element failure criteria. Each failure criterion is developed and applied consistent with the mathematical model of the physical system and the actions.

B.2 CLASSIFICATION OF FAILURE MODES

A failure mode is a distinct manifestation of failure. The prediction of each specific failure mode is made with the corresponding failure criteria. Some criteria can be directly related to the continuum strain

or stress states at a point, while others rely on an indirect measure of strength through stress resultants and element properties. The former type of criteria are referred to as "micro criteria"; the latter are called "macro criteria".

The classification of failure is made according to the dominant stress state within an element at critical sections defined for each failure mode; (critical sections are discussed in section B.4.2). A typical element with stress resultant variation along the length is shown in Fig. B.1. Accordingly, dominant stress states may be associated with either the bending moment, the shear force, or the axial force. Since normal strain and stress values are defined at each point by the continuum model, the dominant normal stress effects (flexural failure and axial force failure) are predicted by micro criteria based on limiting strain or stress values. The shear stresses are not predicted in a direct way; a nominal (average) shear stress distribution can be measured in an indirect way based on equilibrium requirements for the gross element. Therefore, the shear-flexure failure is detected by a macro criteria.

The three basic failure categories are:

1. Flexural failure: dominant normal stress state caused by bending, (micro);
2. Shear-flexure failure: dominant shear stress effect in addition to the normal bending stress caused by a variation in bending moment (macro); and
3. Axial force failure: dominant normal stress state caused by a large axial force, (micro).

Since all three stress resultants (f_{x1} , f_{x2} , f_{x3}) can be associated with any of the three categories of failure, the distinction between case 3

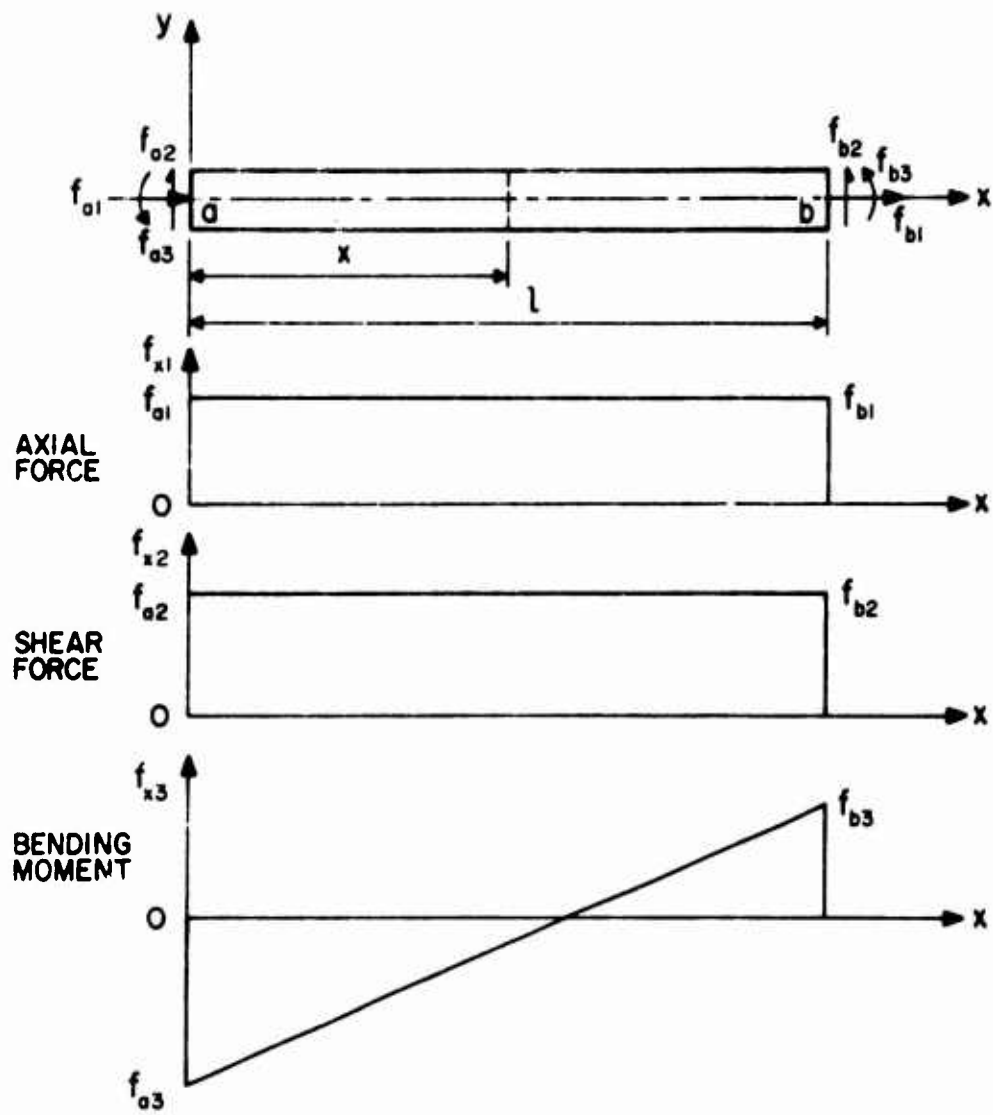


FIG. B. 1: ELEMENT STRESS RESULTANTS

and the other two is made on the basis of the strain state at the critical sections; cases 1 and 2 are associated with strain states which have a point of zero strain within the dimensions of the cross section; case 3 corresponds to the condition of tension or compression across the entire section, since the zero strain point falls outside the section dimensions.

Each failure category can be further classified according to the possible failure modes. The set of failure modes for each category is determined by the type of reinforcement and the type of failure possible for the dominant stress conditions prescribed. The sets of failure modes for the failure categories are defined in the flow charts of Figs. B.2,3, and 4. The failure criteria corresponding to the failure modes are developed in section B.3.

B.3 FAILURE CRITERIA

Each failure mode defined in section B.2 requires a failure criterion. In addition to measuring the limiting condition for the dominant effect, the criterion must include other effects characteristic of possible system behavior. This includes: secondary stress effects, which provide any alterations to the basic criteria caused by stresses other than the dominant stress; and the effects of previous loading history, which measure any change to the basic form caused by the stress variation experienced in an element during previous load conditions, such as load reversals. In addition, a user modification capability is incorporated so that the magnitudes of the basic criteria may be changed to allow certain effects to be studied. The secondary stress effects and the loading history effects are physical measurements obtained from published test results. The user modification capability is provided through

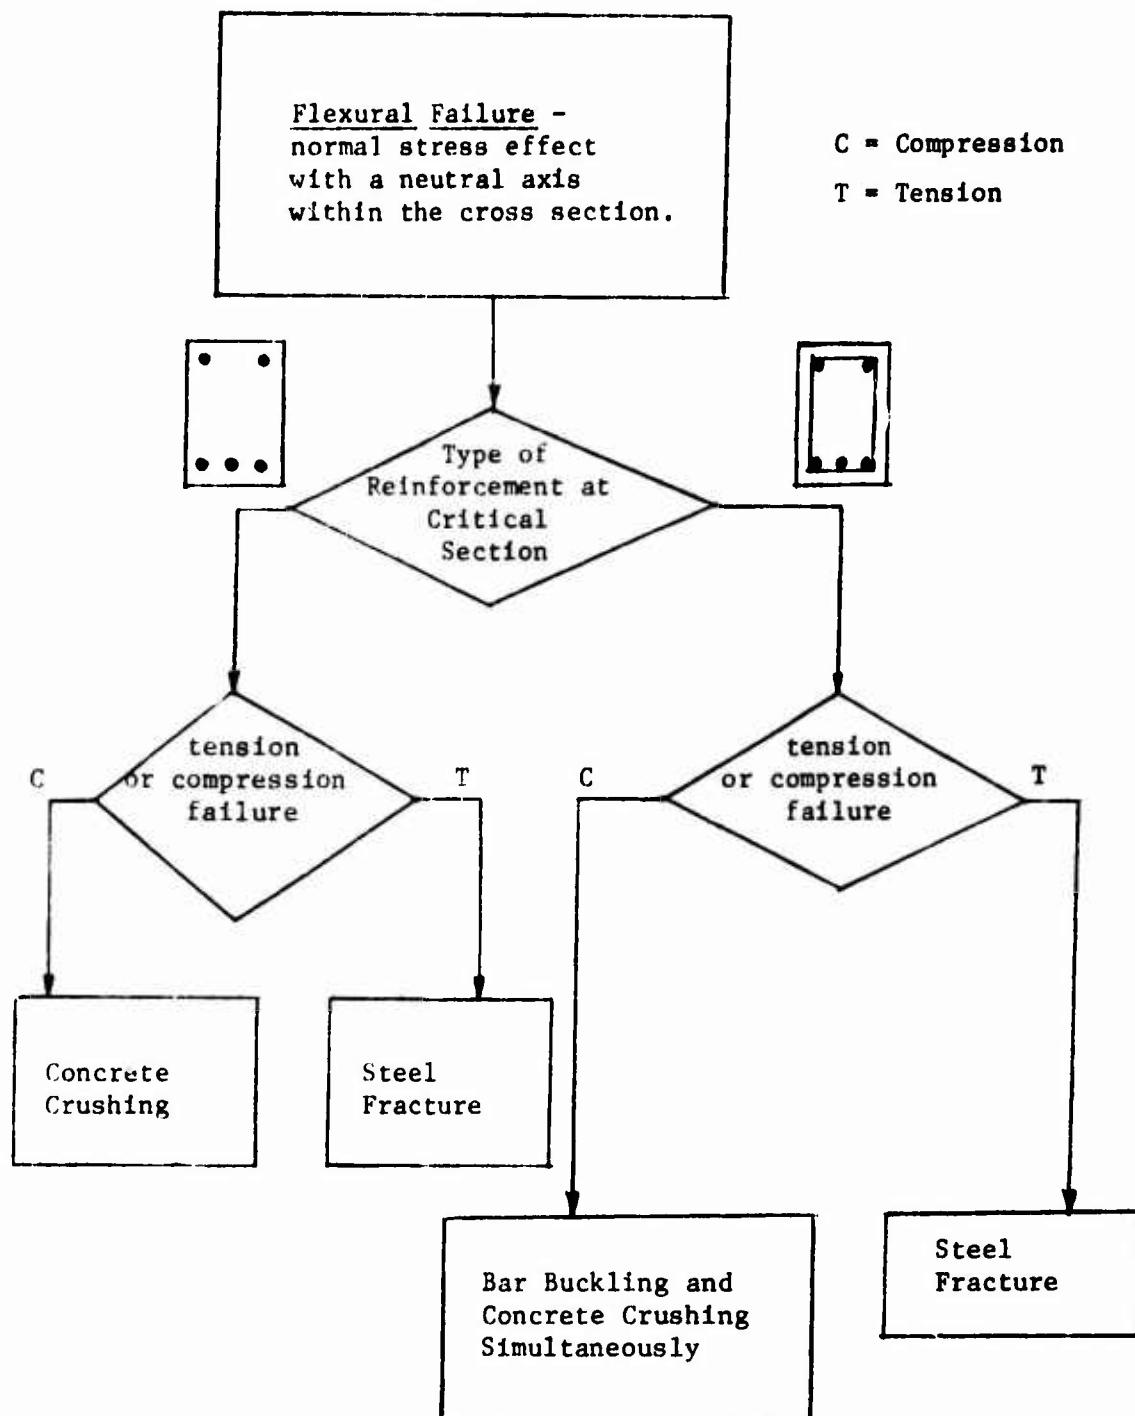


Fig. B.2: Flexural Failure Classification

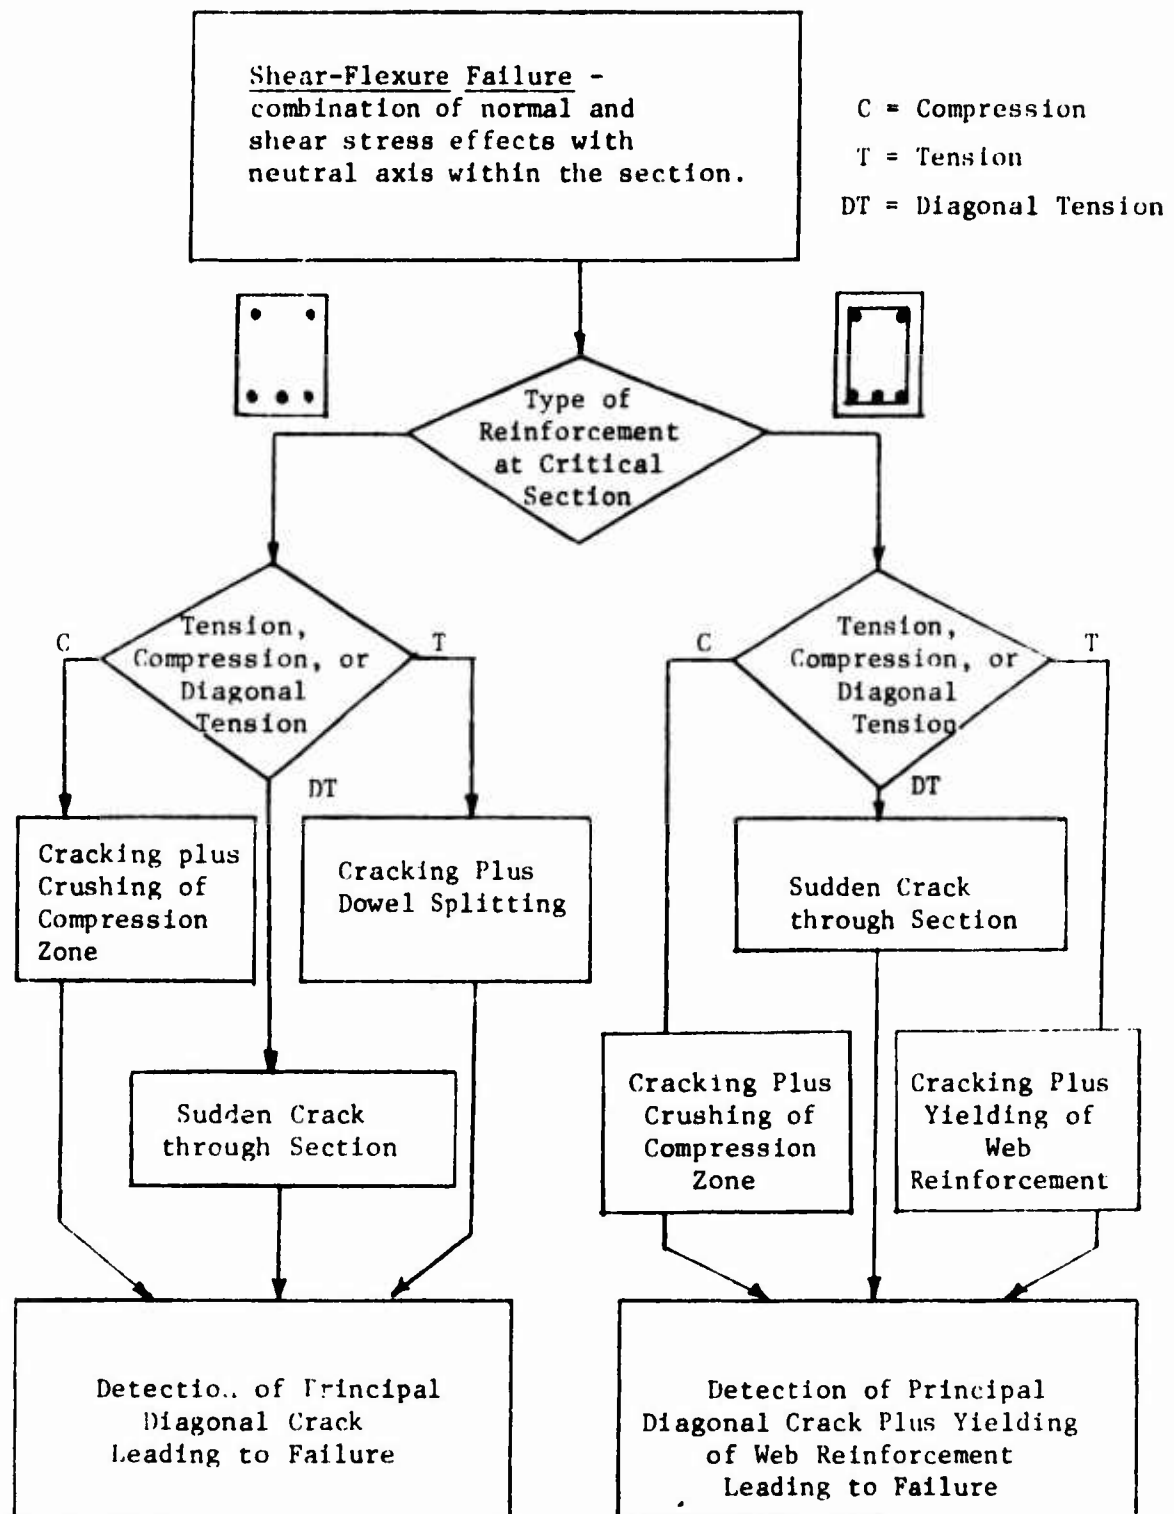


Fig. B.3: Shear-Flexure Failure Classification

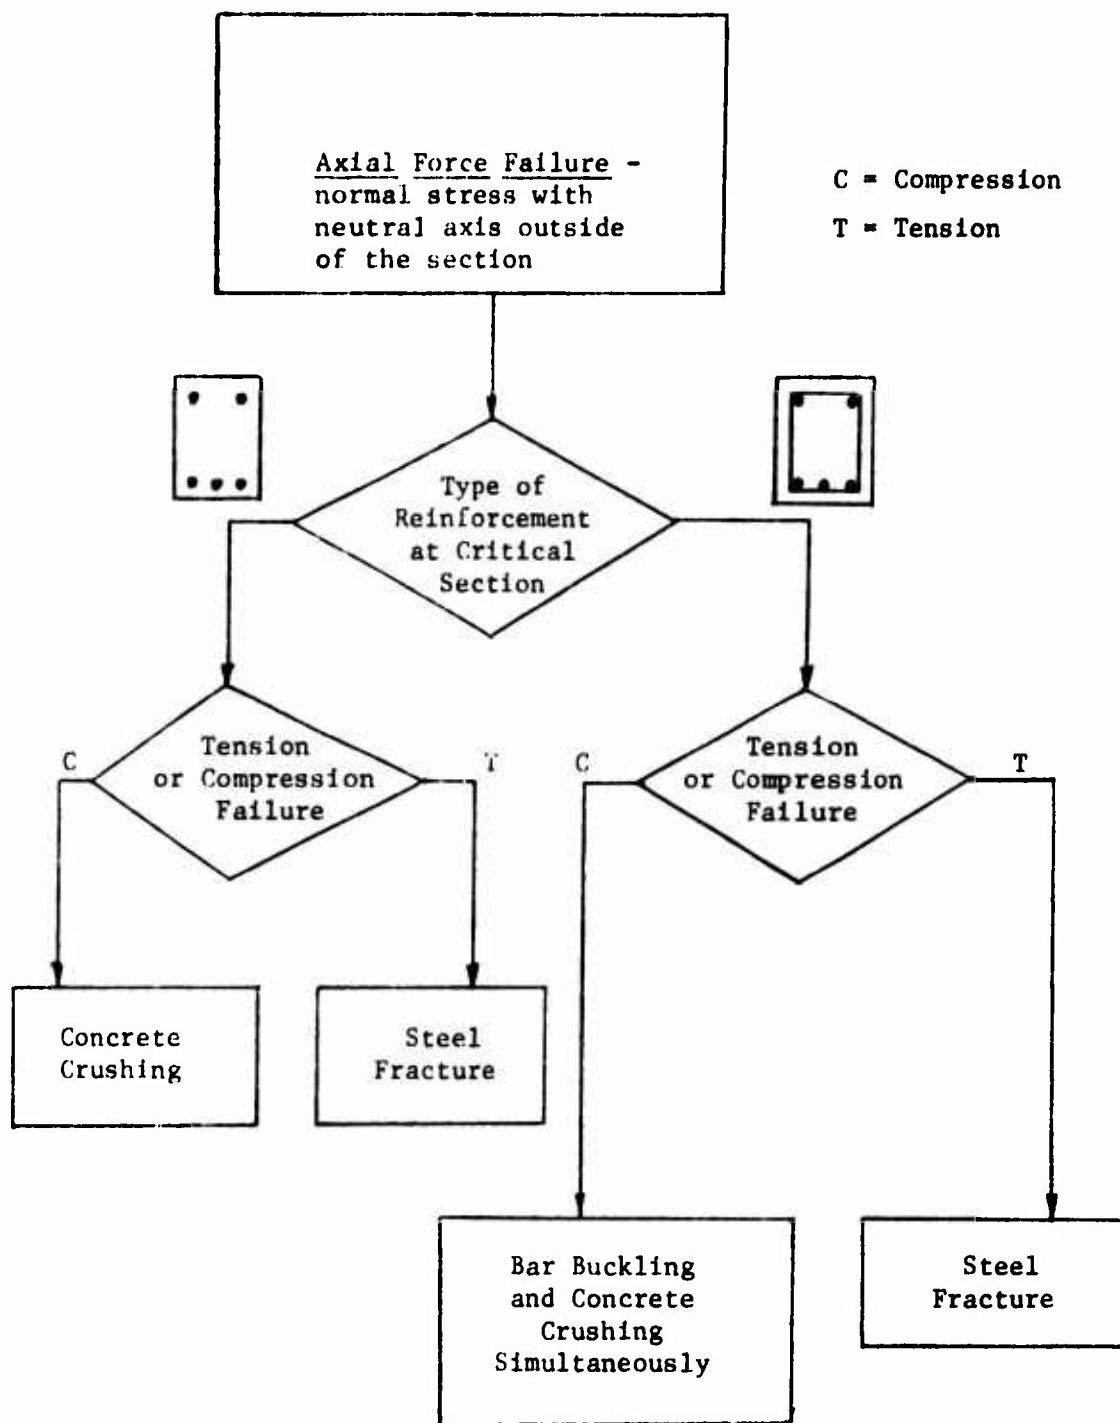


Fig. B.4: Axial Force Failure Classification

coefficients built into the criteria with prescribed limits of variation.

All of the test data used in the development of the failure criteria were obtained from published sources. Not all of the specific information required was available; the deficiencies encountered are noted in the criteria developed.

Since the failure being measured was usually associated with some form of fracture, the test data contained a variable amount of uncertainty indicated by some degree of scatter in the plotted form. To represent these results in the form of a deterministic expression, a reasonable lower bound function was chosen in each case.

The individual failure criterion is developed according to the following outline:

1. Basic criterion for dominant stress,
2. Effect of secondary stresses,
3. Effect of loading history,
4. User modification and
5. Assumptions.

The relationship in each case has the general form expressed by:

$$(\text{Specific criterion value}) - (\text{computed model value.}) \leq 0$$

The individual expressions are also put in a dimensionless form so that units are not involved in their application. The one exception to this rule is the strain criterion for concrete crushing in B.3.1.1.; the constants in this expression are not dimensionless, even though the total expression is dimensionless. All modification coefficients are dimensionless.

The essential details of all of the failure criteria are summarized in section B.3.4.

B.3.1 FLEXURAL FAILURE

This failure category is specified by a dominant normal stress state at a section in an element caused by bending. Another distinction is that the section has a point of zero strain within the dimensions of the cross section. The failure modes which require a failure criteria are shown in Figure B.2.

B.3.1.1 CONCRETE CRUSHING

This failure mode is the crushing of the concrete in an unconfined compression zone. The concrete crushing may occur progressively from the outside surface inward, or it may occur in a sudden disintegration of a highly stressed region. Since the concrete compressive stress-strain response has a negative slope beyond an ultimate stress point, (see Appendix A, Fig. A.1.), a sufficiently large curvature can cause a significant region of the compression zone to be within the negative slope influence. At some point during an increasing load, the bending moment resistance at the section reaches a peak value. If there are no other regions which can carry any additional load increment, then the section will disintegrate suddenly. This condition is characteristic of a singly reinforced beam when a compression failure occurs before the steel yields in tension, [B.34]. A discussion of this mode of behavior is given in references B.13, 18, 19 .

Before the disintegration state is reached, the outer concrete may begin to crush locally. If this happens, part of the moment resisting

capacity is lost at that section. The uniform cross section property is lost, and a stress concentration effect is created in the element. In addition, the spalling may be irregular causing a loss in symmetry with respect to the plane of the structure loading.

If there are steel bars in the compression zone of the concrete, crushing can still occur, but at a proportionally larger moment due to the load carried by the steel. After the crushing begins, the behavior of the steel bars in compression is uncertain without web reinforcement to contain them.

The entire nonlinear response up to an ultimate state can be predicted by the element model since the complete stress-strain curves are included. However, after crushing of the outer layers of concrete, the related effects on the element cannot be predicted by the model. Consequently, the limit to the continuum model behavior is associated with the concrete crushing state at a critical section. The criterion developed is assumed to be valid for a compression zone with or without compression steel.

The condition of initial crushing can be defined by a maximum strain value for unconfined concrete. The stress-strain curves in Figure B.7 show that the maximum strain values decrease with increasing concrete strength f'_c . This characteristic is reflected in both ϵ_{50u} and ϵ_{20u} strain points for unconfined concrete defined in appendix A, Fig. A.1, and by the equations:

$$\epsilon_{50u} = \frac{3. + 0.002f'_c}{f'_c - 1000} \quad (B.1)$$

$$\text{and } \epsilon_{20u} = 1.8572 \epsilon_{50u} - 0.8572 \epsilon_o \quad (B.2)$$

where f'_c = ultimate concrete cylinder strength

ϵ_o = strain at ultimate stress = 0.002

A comparison of these two strain points are shown in Figs. B.5 and B.6 as a function of the variable f'_c . On the same figures are experimental values of ultimate strain due to flexure. It appears that ϵ_{50u} is a realistic lower bound to the data for the higher strength values of f'_c ($f'_c > 4000$ psi). For the lower values of f'_c , ϵ_{50u} is too large; a cut-off value for the ultimate strain at 0.0035 in/in is defined as a lower bound to all of the remaining data points.

In tests of reinforced concrete beams in reference B.31, flexural compressive strains on the outer surface of highly stressed regions reached the level of 0.004 in/in. before crushing. The f'_c values were in the range of 4000 - 6000 psi.

(1) Basic failure criterion: defined by ultimate strain for concrete in compression:

$$\epsilon_{fl} - \epsilon_c \leq 0 \quad (B.3)$$

$$\text{where } \epsilon_{fl} = \frac{3 + 0.002f'_c}{f'_c - 1000} \leq 0.0035$$

ϵ_c = concrete compressive strain at critical section.

The function ϵ_{fl} is shown as the lower limit curve on Figs. 5 and 6.

(2) Axial force effect: included in the strain state.

(3) Loading history effect: no measurable difference for a few unloading-reloading cycles, [24, 31, 33]. Basic stress-strain response function forms an envelope to the reloading paths. Reversal of load produces tension which does not affect concrete compression strength.

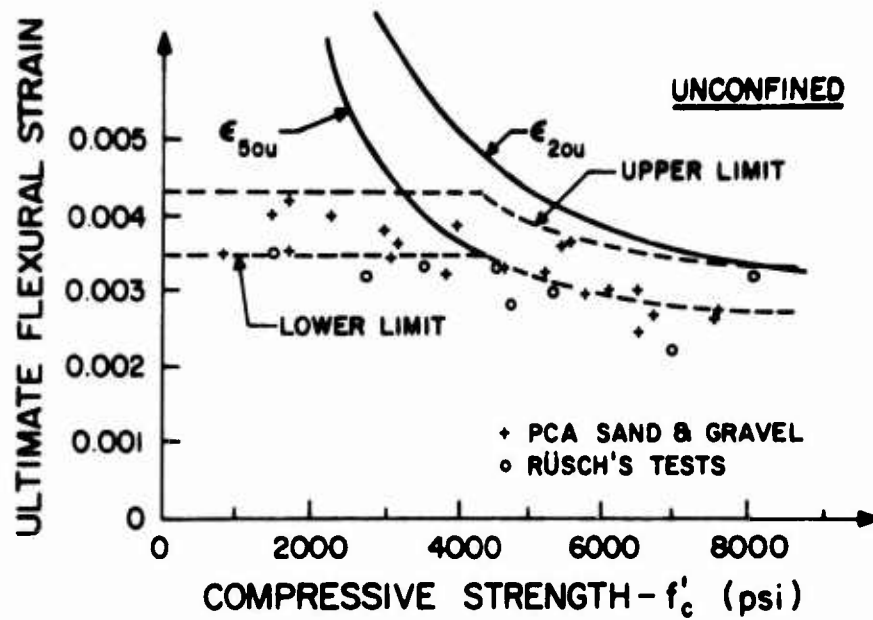


FIG. B. 5: ULTIMATE STRENGTH PROPERTIES OF STRESS DISTRIBUTION (DATA FROM REF. [B.15]).

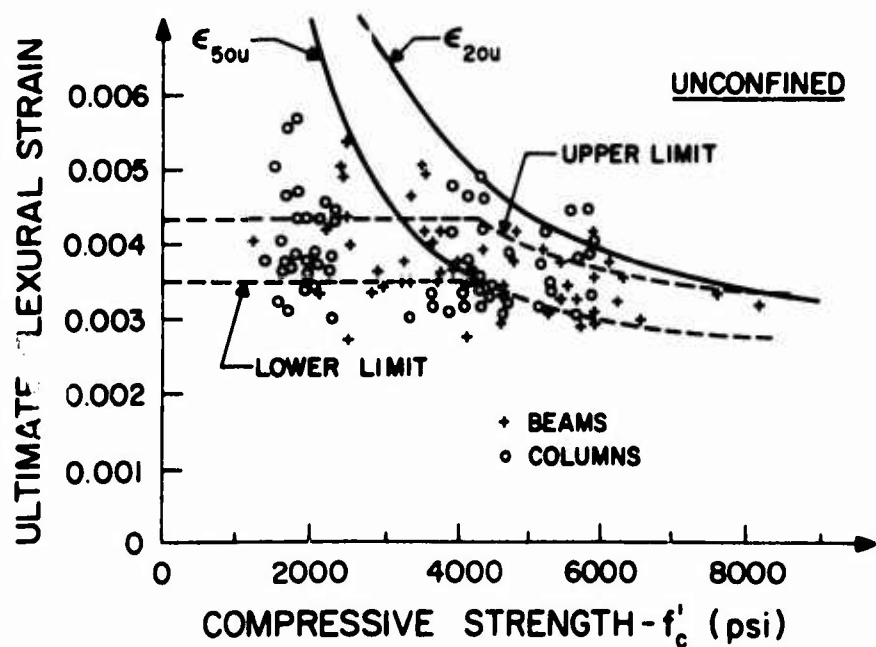


FIG. B. 6: ULTIMATE STRAIN FROM TESTS OF REINFORCED CONCRETE MEMBERS (DATA FROM REF. [B.15]).

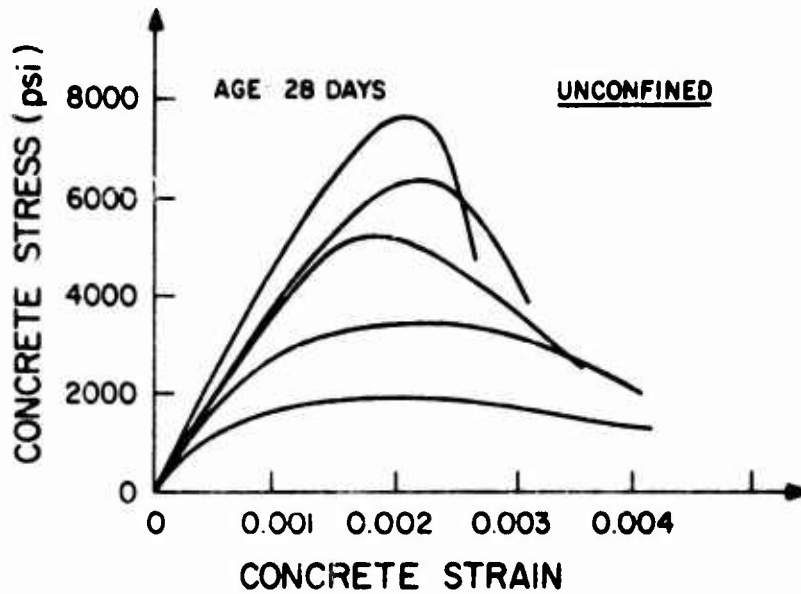


FIG. B.7: FLEXURAL STRESS-STRAIN CURVES
(DATA FROM REF. [B.15]).

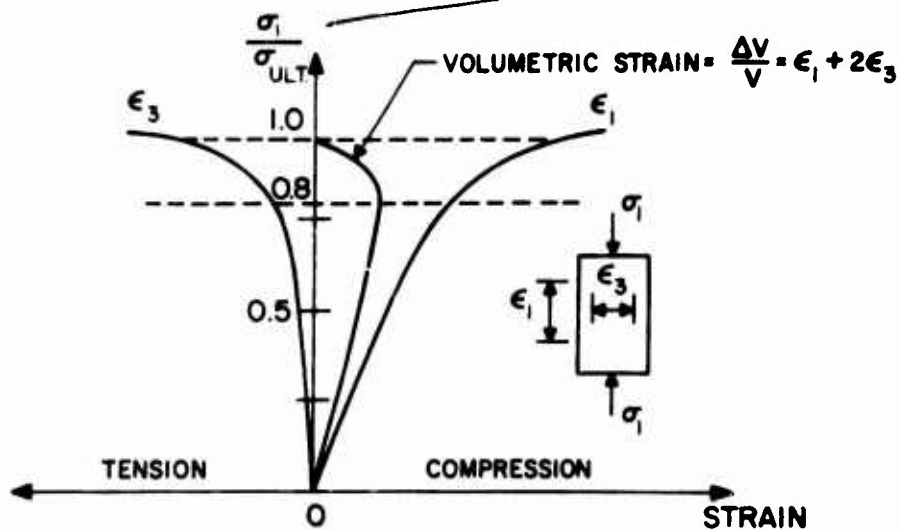


FIG. B.8: CONCRETE STRAIN FUNCTIONS
(DATA FROM REF. [B.28]).

(4) Modification:

(a) modification by coefficient:

$$\epsilon_{f1}^* = C_1 \cdot \frac{3 + 0.002 f'_c}{f'_c - 1000} \leq (0.0035) \quad (B.4)$$
$$(1. \leq C_1 \leq 1.23)$$

The modified ultimate strain is defined by the relationship: $C_1 \times$ (lower limit function). The upper limit function is defined by $C_1 = 1.23$. (The upper limit for C_1 is computed on the basis of the evaluation of ϵ_{f1}^* corresponding to ϵ_{20u} at f'_c (maximum) = 8000 psi.) The upper limit function is also shown of Figs. B.5 and B.6.

- (b) Complete override is not possible since there must be a limit to the strain in unconfined concrete as specified in the material input function. The suggested upper limit for failure is defined above.

(5) Assumptions:

The concrete crushing criterion applies to members with or without compression steel.

B.3.1.2 STEEL FRACTURE

It is possible for the tensile reinforcement to fracture at a critical section before any other limit state is reached for the element. Consequently the fracture of the longitudinal steel caused by excessive tensile strain is considered to be a failure mode.

The occurrence of a bar fracture in a member causes significant changes in the behavior: it creates a severe stress concentration in

the local region due to the lack of material continuity; this in turn causes additional cracking in the concrete and shifts additional stress to the remaining steel bars and the concrete in compression; if there are no other bars at the section, the fracture causes a complete discontinuity in the member. In addition, the stress distribution in the fractured bar varies considerably from zero at the break point to some tensile value consistent with the unbroken bars at some distance away.

For a two-dimensional model, all of the bars at the same distance from the reference axis have the same strain value; and since they are assumed to have the same material properties, the entire row fractures at the limit strain. The model can predict the strain value in the nonlinear range up to the limiting strain value. After the fracture point is reached, the model cannot predict the stress concentration effects or the stress distribution in the fractured bar. Therefore, the limit state is defined as the tensile fracture of any row of the steel reinforcing bars at the critical section of an element.

The failure condition can be predicted on the basis of a strain value at the point on the cross section corresponding to the bar location. The element model defines this value directly. Since the strain is assumed to be uniform across the bar area, the limit strain of the uniaxial stress-strain function for steel determines this value. The numerical values for the limit strains are shown in appendix A, Fig. A.4.

(1) Basic failure criterion: defined by a limiting strain value for a steel bar in tension. (See appendix A, Fig. A.4)

$$\epsilon_{f2} - \epsilon_s \leq 0 \quad (B.5)$$

where ϵ_{f2} = limiting tensile strain value
 ϵ_s = tensile strain in longitudinal steel bar at a critical section,

(2) Axial force effect: included in the strain state.

(3) Loading history effect: it appears that no information is available on the question of the effect of a few (2 or 3) inelastic stress reversals on the fracture strain of reinforcing steel. The behavior of reinforcing steel subjected to stress reversal is documented in reference B.32 . If the number of stress reversals is small, simplifications may be introduced into the stress-strain function which includes stress-reversal, basing the stress reversal curve on the original monotonic stress-strain response. Others have utilized this concept to define an idealized response for steel with stress reversal, [B.1,8,29]. But none of these have indicated the fracture strength. For simplification, it is assumed that the strain at fracture remains the same as the monotonic fracture point, regardless of the history of loading.

(4) Modification:

(a) no parameter modification is necessary since the fracture point defined by the input function for the material is not altered in the failure criteria

(b) no override is possible because the physical limit of the stress-strain function for each material is defined independent of the limit conditions for the model.

(5) Assumptions:

The limiting tensile strain value for the monotonic stress-strain function for steel is a valid measure of the fracture strength including loading history effects.

Note:

No special check is made for the case where bending in a singly reinforced concrete element occurs opposite to its reinforced strength. Clearly the concrete will crack in tension and form a discontinuity in the members at the section. Physically, the longitudinal bars could be positioned at any depth in a member. Whether or not there is sufficient resisting strength in the couple that is formed by the resulting concrete compression zone and the steel in tension depends on the moment to be resisted and the steel location at a section. If the steel is near the tension surface, a larger moment can be resisted than for the case where the steel is near the compression surface. In any case, the limitations provided by the concrete crushing (B.3.1.1) and steel fracture (B.3.1.2) are sufficient failure checks for any placement of the longitudinal steel.

B.3.1.3 BAR BUCKLING AND CONCRETE CRUSHING SIMULTANEOUSLY

This failure mode is the process of the bending out of reinforcing bars and the simultaneous crushing of concrete causing a sudden destruction of the compression zone. It is characteristic of a member with web reinforcement (see Fig. B.9).


This behavior has several distinguishing traits:

- a. The condition is not possible until the concrete outside of the compression bars has begun to crush; otherwise the bars are adequately restrained from buckling;
- b. The process is most likely initiated by the expansion of the confined concrete near the ultimate stress level, effectively pushing the bars outward from their normal positions;

- c. The bars are in a yielded state in compression, usually in the strain hardening range, at the time of buckling, [B.31];
- d. Normal web reinforcement provides a restraint to displacement of the longitudinal bars at their contact points, thus providing a significant influence on the bending strength of a bar segment, [B.5,31].

The concrete expansion effect can be measured by its volumetric strain under compressive stress. The lateral strain and volumetric strain of unconfined uniaxially loaded concrete begin altered behavior at approximately 80% of ultimate strength to the extent that near the ultimate stress the volumetric strain has changed signs from compression to tension, (see Fig. B.8). This indicates that there is an expansion effect developed to push the bars out of line, [B.28].

An important effect is the combination of yielded steel and crushed concrete cover which allows the failure process to occur. To see the possibility of this combined effect, the steel strains at strain hardening are compared to the range of strain at which unconfined concrete crushing occurs:

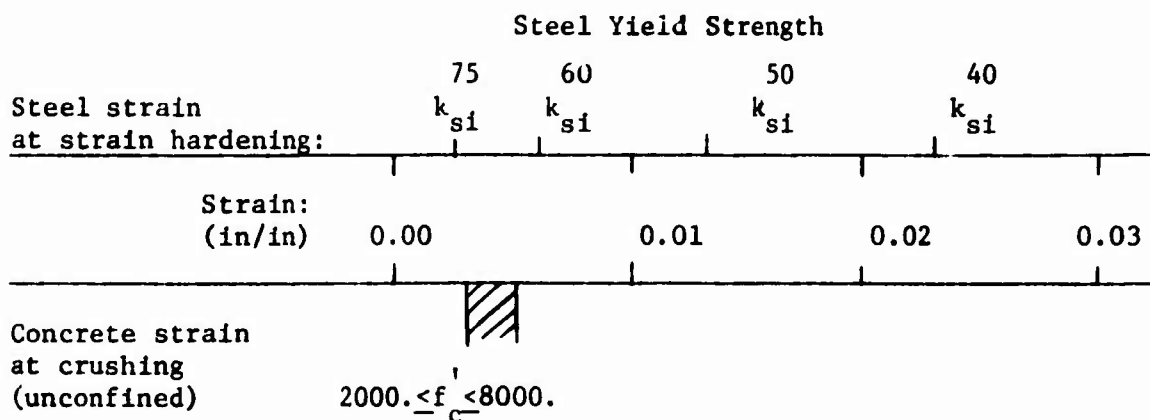

If some allowance is made for the fact that the normal strain at a section is larger at the surface than at the bar location, it is reasonable to

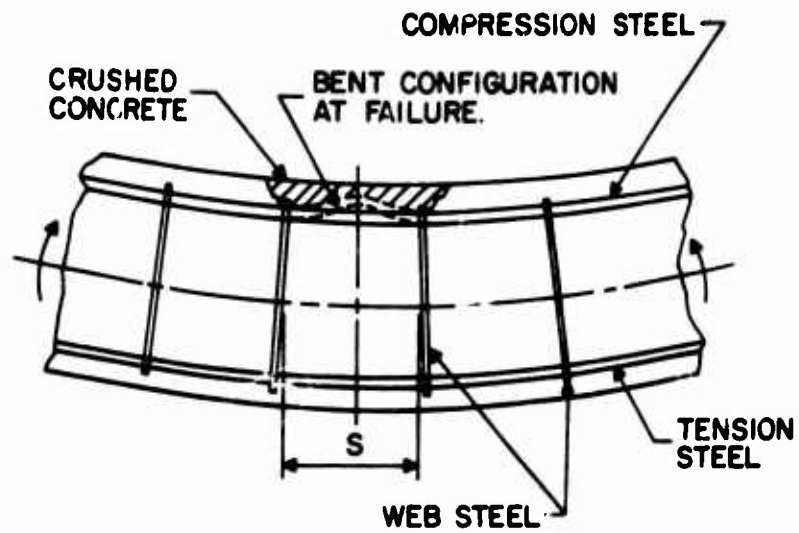


FIG. B. 9: COMPRESSION ZONE FAILURE

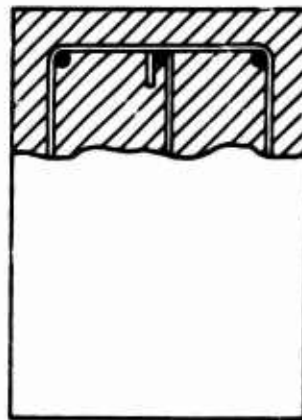


FIG. B. 10: DIRECT TENSILE RESTRAINT FOR LONGITUDINAL BARS.

state that when the steel enters the strain hardening range, the concrete cover has reached the crushing state.

In reference B.5, experiments were performed to study the behavior of the longitudinal steel as affected by compressive stress and lateral reinforcement. One conclusion reached was that the size of the lateral steel bar was not important for providing restraint against the outward displacement of the longitudinal bars; a positive direct tensile connection as shown in Fig. B.10 for a corner bar and an interior bar provide adequate restraint with the smallest diameter lateral bars.

In observations of this failure form in tests, it is difficult to determine whether the concrete crushing or the steel buckling initiates the final destruction [B.31].

The element model can predict the flexural behavior of an element into the nonlinear material range. However, it cannot predict the behavior after the buckling of the compression bars at a critical section since the compression zone has been destroyed in the region of buckling. Not only has a partial discontinuity been created at the section but the material uniformity along the length has been altered. The limit state is defined to be the buckling of compression bars stressed into the strain hardening range at the critical section of an element. The buckling condition for the outer layer of bars is considered sufficient for defining the limit state if there are multiple layers involved since an unknown stress concentration and redistribution is created due to this localized effect. For the member with web reinforcement, the crushing of the outer concrete is not considered to alter the behavior significantly. The element model is assumed to be valid up to the point of bar buckling.

The expression for predicting the critical stress for a uniform bar in simple compression is used to measure the buckling condition. To include the effect of the strain hardening state of the material, the tangent modulus property is included. The critical stress is defined by the following expression:

$$f_{cr} = C_2 \cdot \pi^2 \cdot \frac{E_t}{(S/K)^2} \quad (B.6)$$

where

f_{cr} = critical compressive stress in longitudinal reinforcing bar

E_t = tangent modulus for steel at f_{cr}

S = spacing of web reinforcement

K = radius of gyration of the bar

C_2 = end restraint coefficient.

$C_2 = 1$: pinned end condition

$C_2 = 4$: fixed end condition

This equation for f_{cr} was used in reference B.5 as a basis for determining the spacing of web reinforcement in compression members; a value of $C_2 = 2$ was used.

To implement this prediction, the model can compute the stress in a bar directly from a given strain state, and this value can be compared to a specific critical stress value. One bar size and one material are representative of the entire layer checked.

(1) Basic failure criterion: the relationship is based on the equation for critical stress of an initially straight uniform bar in simple compression:

$$f_{cr} - f_s \leq 0 \quad (B.7)$$

where

$$f_{cr} = C_2 \pi^2 \cdot \frac{E_t}{(S/k)^2} \quad \text{defined in equation B.6;}$$

f_s = compressive stress in longitudinal reinforcing bar.

If f_{cr} is expressed in terms of the bar diameter D , i.e. let $k = D/4$, and if the criterion is put in a dimensionless form, the expression can be re-written as:

$$C_2 \cdot \frac{\pi^2}{16} \cdot \left(\frac{D}{S}\right)^2 \cdot \frac{E_t}{f_s} - 1 \leq 0 \quad (B.8)$$

- (2) Axial force effect: included in the strain state.
- (3) Loading history effect: since the stress-strain response is uniquely defined for unloading and reloading of steel bars, the check can be made at any point where a tangent modulus exists. The check is applied for a compressive stress state in the strain hardening range for any cycle of loading. This is demonstrated in Fig. B.11.
- (4) Modification:

a. Modification by coefficient is made through the constant C_2 . This reflects the effects of various end restraints on the critical buckling stress. The end restraint on the segment between web bars is a function of the continuity of the bar and its freedom to deform. The modified equation is:

$$C_2 \cdot \frac{\pi^2}{16} \cdot \left(\frac{D}{S}\right)^2 \cdot \frac{E_t}{f_s} - 1 \leq 0 \quad (B.9)$$

$$(1. \leq C_2 \leq 4.)$$

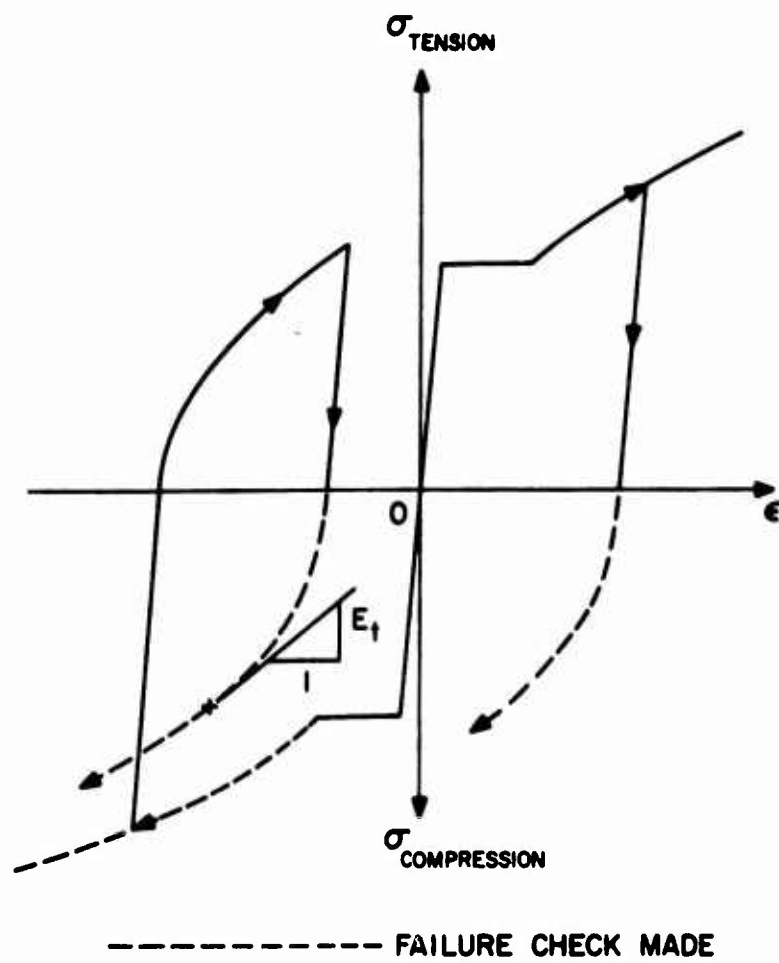


FIG. B. 11: FAILURE CHECK FOR BAR BUCKLING.

$C_2 = 2$ is used as the lower bound value.

- b. The user may choose to completely suppress this particular failure mode. By overriding this condition the member will maintain the original configuration of the steel for all stress-strain values.

5. Assumptions:

- a. The steel bar is initially straight and uniformly compressed;
- b. The steel bar cannot buckle until it is stressed into the strain hardening range of behavior;
- c. All normal web reinforcement bars provide sufficient restraint to prevent lateral displacement of the longitudinal bars at the point of contact;
- d. Buckling of the longitudinal steel bars initiates the destruction of the compression zone at the critical section.

B.3.1.4 STEEL FRACTURE

This failure mode is the fracture of the longitudinal steel caused by excessive tensile strain. Since this fracture is unaffected by web reinforcement in a member, the failure criterion is identical to the criterion developed in section B.3.1.2.

B.3.2 SHEAR-FLEXURE FAILURE

This category of failure defines the failure modes and criteria for the effects of shear stress and normal stress acting in combination within a member. The failure modes which require a failure criteria are shown in Fig. B.3.

The distinct form of behavior for this type of failure is a diagonal crack which more or less follows a path normal to the principal tensile

stress trajectories in the member, Although several similar cracks may be initiated, one crack becomes dominant as the load is increased. If web reinforcement exists at the crack location, sudden material separation is prevented.

The principal diagonal crack alters the member behavior by introducing a discontinuity. The crack is deep enough to disrupt the flexural characteristics within the element by reducing the size of the compression zone in a localized region. As a result, a redistribution of stresses is required to maintain equilibrium in the altered state, [B.10,21,35].

The discontinuous behavior of diagonal tension cracking in reinforced concrete members is associated with the weakness of concrete to principal tensile stress. The combination of normal tensile stress due to flexure, and shear stress due to variation in flexure can produce a more severe principal tensile state at a point than for conditions due to flexure alone. The tensile strength of concrete depends on local properties near the point of fracture in addition to the strain distribution, hence it is random in nature. This manifests itself in the unpredictability of specific locations and shapes of diagonal cracks.

This is in contrast to the more predictable behavior in bending of the same type of member. In pure bending, the member strength depends on the compression zone properties of concrete and the tensile strength of the longitudinal steel. The resulting crack formation in the tensile zone is of only secondary significance because these cracks are stabilized by a uniform compression zone.

B.3.2.1 DETECTION OF PRINCIPAL DIAGONAL CRACK LEADING TO FAILURE

If a diagonal crack occurs in a member without web reinforcement, there are three forms of behavior which describe the ultimate failure condition:

- a. The crack may propagate through the entire section;
- b. The crack may stop near a three dimensional compression zone, e.g., near a concentrated force or a support point; the final failure form is a destruction of the reduced compression zone above the crack;
- c. The crack may propagate parallel to the tensile steel bars effectively removing their contribution from the element load resistance.

The ultimate failure conditions described by the crushing of the compression zone above the crack (b) and splitting along the longitudinal steel (c) are considered post-cracking behavior since they occur after the formation of the principal crack.

The significant factors which affect the shear cracking behavior have been determined principally from test results. Those factors considered most significant are:

- a. the longitudinal steel percentage,
- b. the tensile strength of concrete,
- c. the dimensions of the cross section in comparison to the length of the member,
- d. an axial force effect in addition to effects of lateral forces applied,
- e. the location of the region of maximum shear force with bending,

f. the anchorage and bond characteristics of the longitudinal steel,
and

g. the way loads are applied to a member, directly or indirectly.

These factors can be divided into three main groups: the initial shape and reinforcement of the member (a., c.), material properties (b., f.), and the internal stress distribution (d., e., g.). The steel properties are not significant because the steel does not yield before the formation of the significant crack unless the flexural effects are dominant [B.10]. The anchorage and bond characteristics of the longitudinal steel have the most influence on the post-cracking behavior.

The limitations imposed on a continuum model are based on physical conditions which significantly alter the dominant normal stress behavior predicted by the model. The discontinuous effects of a diagonal crack and the resulting stress concentration at the tip of the crack are not included. Therefore, the limit state is considered to be the initial formation of the principal diagonal crack. This precludes the consideration of the post-cracking behavior as limit states.

The element model measures the normal stress distribution along the length of the element. Flexural and axial stress effects are both derived from the given strain state. To get a measure of the shear stress effects, only indirect procedures are available: i.e., the shear force can be computed to satisfy equilibrium for the normal stress resultants, and a nominal measure of the stresses can be based on an average distribution equivalent to a shear force at a cross section. Consequently, the conditions causing the formation of a diagonal crack cannot depend upon stresses at a point (micro criterion); the true stress distribution is unknown. The crack prediction must be based on the nominal conditions

indirectly related to the stresses predicted by the model.

The indirect measure usually appears as an empirical relationship between gross element properties and nominal stress values. From an understanding of the uncertainties associated with the formation of the principal diagonal crack, it is understandable that the relationships developed for their prediction are inaccurate for generalized conditions. The criterion developed in this section incorporates the variables observed to be significant in tests, while accounting for the uncertainties by providing lower bound functions.

There are two important considerations in defining the failure criterion for diagonal tension cracking: (1) the equation for predicting the cracking strength of a member at a particular section for generalized conditions; and (2) the choice of a critical section at which to apply the equation. The prediction equation is discussed below; the application to a critical section is discussed in the implementation section (B.4).

The form for the failure criterion is

$$\frac{V_c(x)}{bd\sqrt{f'_c}} = \frac{v_c(x)}{\sqrt{f'_c}} = A + B \frac{pd}{\sqrt{f'_c}} \left| \frac{V(x)}{M(x)} \right| \quad (B.10)$$

v_c = nominal measure of cracking stress at station x

V_c = cracking force at a section x

b = gross cross section width

A, B = constants to be defined by data

f'_c = ultimate cylinder strength of concrete

($\sqrt{f'_c}$ is a measure of tensile strength)

p = longitudinal steel percentage = A_s/bd

$V(x), M(x)$ = shear force and bending moment at a section x

where v_c is computed

d = effective depth of longitudinal steel.

The form of this equation is identical to that presented in reference B.30 , and it has also been used in modified versions by others [B.10, 17].

(Note: other equations have been developed for computing v_c , e.g., references B.21,37 , but the fit of data is no better in general.) This equation defines the nominal shear stress at the initial crack formation for a specific location x as a function of the element dimensions, reinforcement, and material properties (p, b, d, f'_c), and as a function of the internal stress distribution ($V(x)/M(x)$) evaluated at the same location x . The ratio (V/M) measures the effect of the shear force and the bending moment on the principal tensile stress, and hence on the crack formation. As a ratio, this influence is translated into a distance measurement, from the point where $M = 0$ to the crack location.

In order to evaluate the constants A and B consistent with these characteristics, the $V(x)$ and $M(x)$ values must be known at the crack location, in addition to the other factors. The two basic parameters,

$$F_1(x) = \frac{V_c(x)}{bd \sqrt{f'_c}} \quad \text{and} \quad F_2(x) = 1000 \cdot \frac{pd}{\sqrt{f'_c}} \cdot \left| \frac{V(x)}{M(x)} \right|$$

can be evaluated for specific test cases for a wide variation in each factor. The choice of a specific function to fit the data will establish A and B .

The process chosen here is to develop a basic equation using only the results from simple beam tests with concentrated loads since they represent,

in some form, all concentrated load conditions. In addition, there are many test results of this form available. This basic equation can then be checked against other conditions for more general applicability. The basic data is from reference B.30 and is plotted in Fig. B.12. The lower bound function is shown on the figure and can be expressed as:

$$F_1(x) = 1.5 + 3.5 F_2(x) \leq 3.0 \quad (B.11)$$

where $A = 1.5$ and $B = 3.5$ define the intercept distance and the slope of the function.

The method of load application is significant to the cracking strength particularly for small (a/d) values, where a is the shear span length, [B.12]. Such refinement is not considered appropriate in this behavior prediction for lack of quantitative measurements and precise characterization of the physical loads actually applied. It should be noted, however, that for most beam dimensions and loading ($F_2(x) < 0.3$), the (a/d) values are larger, and the support and load effects are not significant in the region of the crack.

The check of the lower bound function for the cases of simple beams with uniformly distributed loads and for restrained and continuous beams with concentrated loads are shown separately in Figs. B.13 and B.14, with reasonable acceptance.

(1) Basic failure criterion: defined by the lower bound function developed:

$$F_1(x) - F(x) \leq 0 \quad (B.12)$$

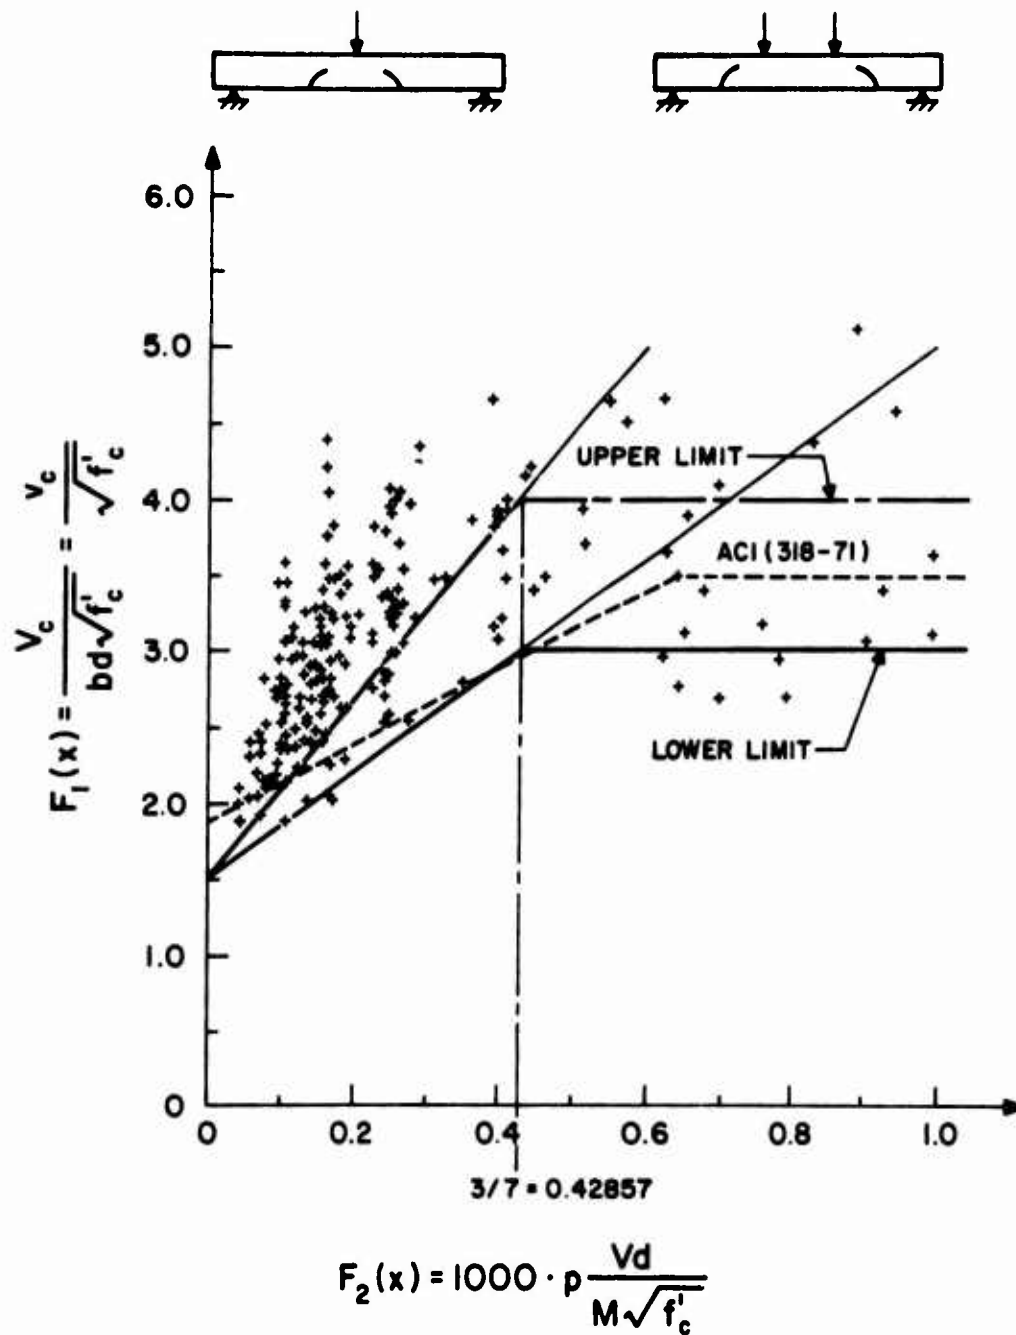


FIG. B. 12: DATA FOR INITIAL SHEAR CRACKING - (A)
(PLOTTED DATA FROM REF. [B. 30] TABLES
5-1, 2, 8, 9, 12.)

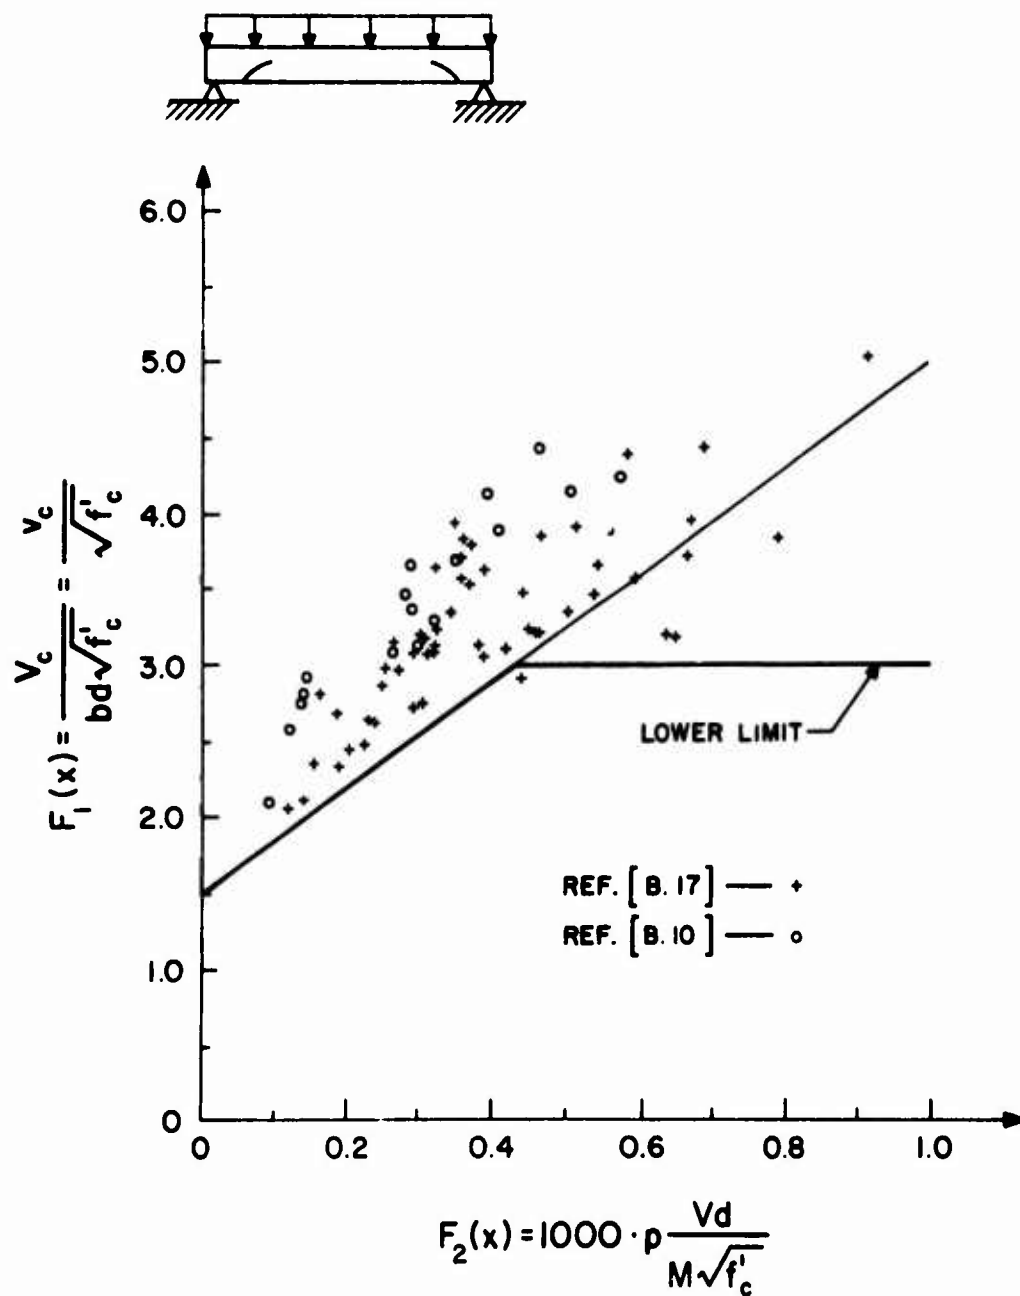


FIG. B. 13: DATA FOR INITIAL SHEAR CRACKING—(B.)
(PLOTTED DATA FROM REF. [B. 10, 17]).

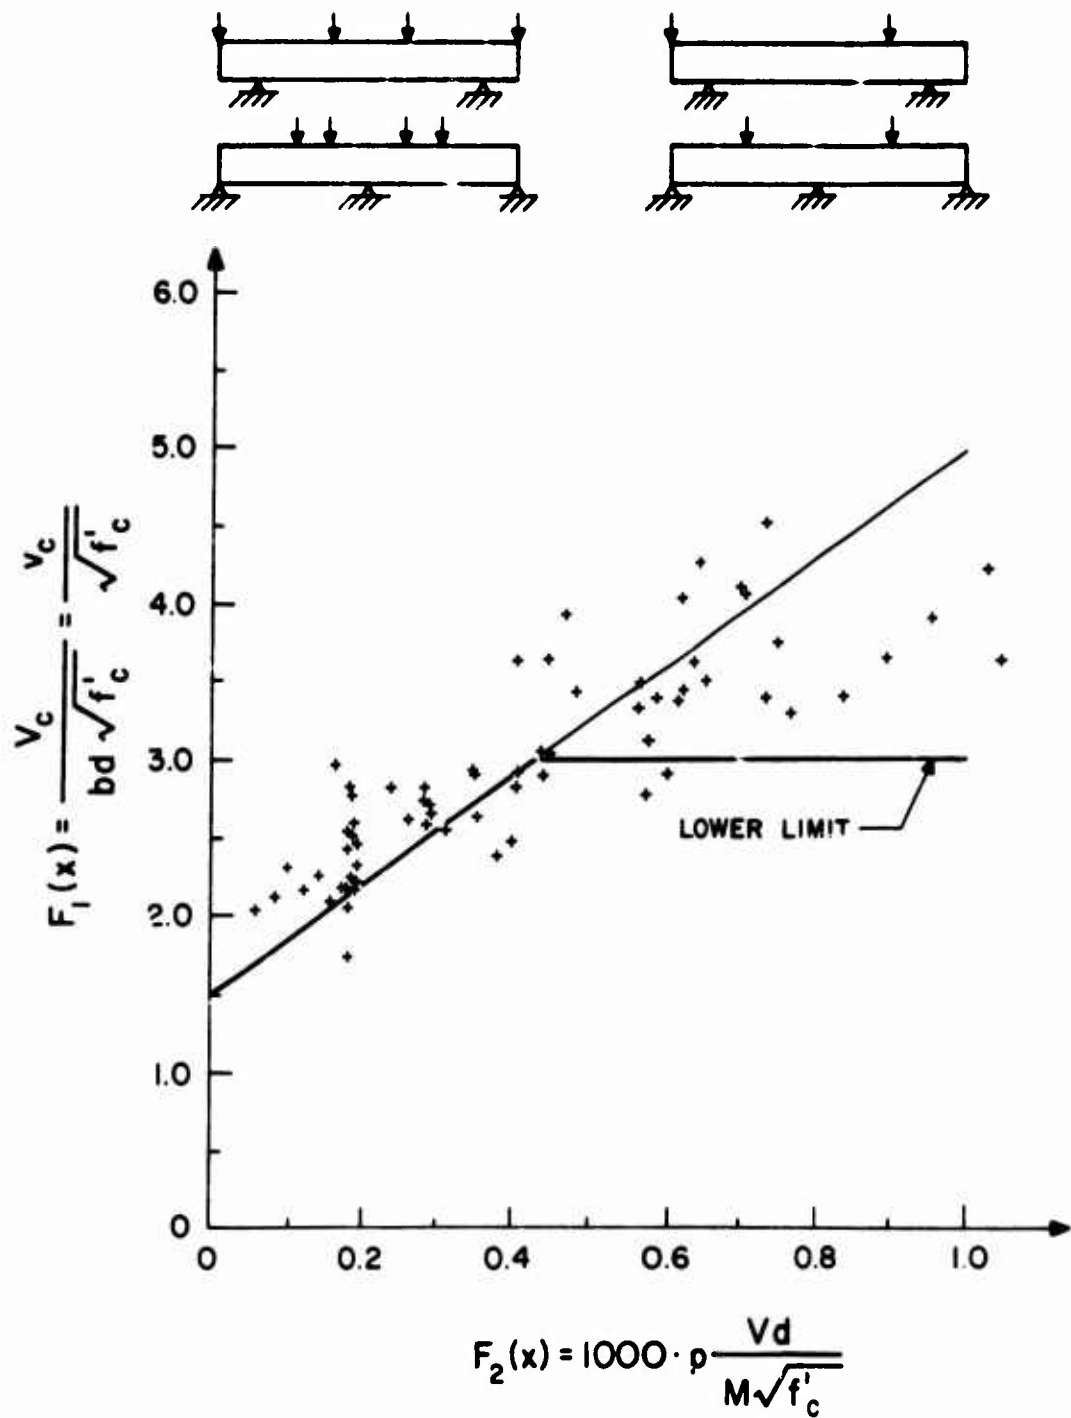


FIG. B. 14: DATA FOR INITIAL SHEAR CRACKING - (C)
(PLOTTED DATA FROM REF. [B.30] TABLES
5-3, 4.)

where

$$F_1(x) = 1.5 + 3.5 \cdot F_2(x) \leq 3.0$$

$$F(x) = V/bd\sqrt{f_c'}.$$

$F(x)$ is a nominal measure of the actual shear force at the critical section.

The equation is considered applicable to any concentrated load condition for straight elements because the shear and moment functions can be broken down into equivalent simple beam segments when the sections of zero moment are located. Each segment of constant shear can be examined separately.

(2) Axial force effect: this effect is to measure the change in the basic criterion caused by the application of a tensile or compressive axial force. The effect is reflected in the alteration of the principal stress trajectories in the element. A compressive force causes a larger compression zone which forces the diagonal crack to bend over at a shallower depth from the tension face. A tensile force causes the compression zone to be smaller in depth resulting in a deeper and less inclined crack [B.10, 14].

The axial force influence is not symmetric, particularly for larger values. In the limiting case, where the axial force dominates the behavior, the effects of compression and tension are distinctly different. (This behavior is discussed in section B.3.3.).

The choice for an equation to predict the axial force affect was made on the basis of the following points:

- a. It is easier and more efficient to work with strains and stresses from the model rather than stress resultants.

- b. The equation should be numerically easy to apply and easy to modify by coefficients.
- c. Prediction of the axial force effects should be no less accurate in general application than the currently accepted design equations.

The two alternative approaches to specifying a prediction equation were: (1) to use the current ACI Code equation (ACI Standard 318-71),

$$V_c = 1.9\sqrt{f'_c} + 2500 p \cdot \frac{V_d}{M-N \cdot \left(\frac{4h-d}{8}\right)} \quad (B.13)$$

or (2) to develop a different equation and check it with code equation.

The choice was made to develop a different equation for the following reasons:

- a. The ACI Code equation required the computation of stress resultants with no alternative;
- b. To modify the equation with a coefficient for the effect of N, and to determine lower and upper limits to its variation is difficult in the form presented by the Code equation.
- c. A different equation could be developed to more closely fit the desired qualities;
- d. There appeared to be sufficient published test results as a basis for the equation development and for testing its accuracy for both tension and compression effects.

The initial form of the equation was based on a form suggested in reference B.10 , i.e.,

$$\frac{V_{cn}(x)}{bd\sqrt{f'_c}} = [1.5 + 3.5 F_2(x)] \cdot [1 - \alpha \cdot \frac{N(x)}{V_{cn}(x)}] \quad (B.14)$$

The new terms are defined to be:

$V_{cn}(x)$ = cracking shear force at section x with axial force

$N(x)$ = axial force (tension position)

α = coefficient for axial force effect.

This equation was modified because N/V_{cn} did not correctly measure a change in the cracking strength for all cases. This is due to the fact that V_{cn} is influenced by N ; i.e., V_{cn} increases for N compression, and decreases for N in tension. This equation is more reasonable if there is a fixed ratio for N/V_{cn} up to the cracking strength.

The modified form uses $V_c(x)$ as the reference force for $N(x)$, where $V_c(x)$ is the cracking force without an axial force effect; i.e.,

$$\frac{V_{cn}(x)}{bd\sqrt{f'_c}} = [1.5 + 3.5 F_2(x)] \cdot [1. - \alpha \frac{N(x)}{V_c(x)}] \quad (B.15)$$

Noting that:

$$F_1(x) = \frac{V_c(x)}{bd\sqrt{f'_c}} = 1.5 + 3.5 F_2(x) \quad (\text{equation B.11})$$

and nondimensionalizing N and V_c by the factor $bd\sqrt{f'_c}$, equation (B.15) can be written:

$$\frac{V_{cn}(x)}{bd\sqrt{f'_c}} = \frac{V_c(x)}{bd\sqrt{f'_c}} \cdot [1. - \alpha \cdot \frac{N(x)/bd\sqrt{f'_c}}{V_c(x)/bd\sqrt{f'_c}}]$$

and finally,

$$\frac{V_{cn}(x)}{bd\sqrt{f'_c}} = \frac{V_c(x)}{bd\sqrt{f'_c}} - \alpha \cdot \frac{N(x)}{bd\sqrt{f'_c}} \quad (B.16)$$

$$\text{For } F_3(x) = \frac{V_{cn}(x)}{bd\sqrt{f'_c}} \text{ and } F_4(x) = \frac{N(x)}{bd\sqrt{f'_c}}$$

equation (B.16) can be written:

$$F_3(x) = F_1(x) - \alpha F_4(x) \quad (B.17)$$

The limitation (≤ 3.0) shown in equation B.11 is omitted in the derivation, but it is to be incorporated in the application.

To evaluate the lower limit for the coefficient α , the equation B.17 was rearranged as shown below:

$$\frac{v_{cn} - v_c}{v_c} = \alpha \left| \frac{N}{V_c} \right| \quad (B.18)$$

where $v_{cn} = \frac{V_{cn}}{bd}$ and $v_c = \frac{V_c}{bd}$. These two basic factors are evaluated for a series of tests and plotted in Fig. B.15. The lower limit function is shown as $\alpha = 0.10$ for both tension and compression. A reasonable average value was chosen for the lower limit of α to avoid compounding lower bound features into one equation. The basic equation for V_c was previously defined to be a lower bound fit of data.

The final justification for the implementation of the derived equation is based on its ability to predict the observed trends in test results. The derived equation was applied to the data in reference B.14 which included tests for tension, compression and zero axial force. The results are shown in Fig. B.20 as a comparison with test values; on the same plot, the ACI Code equation is applied to the same set of data. It is clear that the derived equation is as valid as the Code equation for measuring all three axial force effects. The data from reference B.14 is shown to be incorporated into the derivation of the coefficient α and

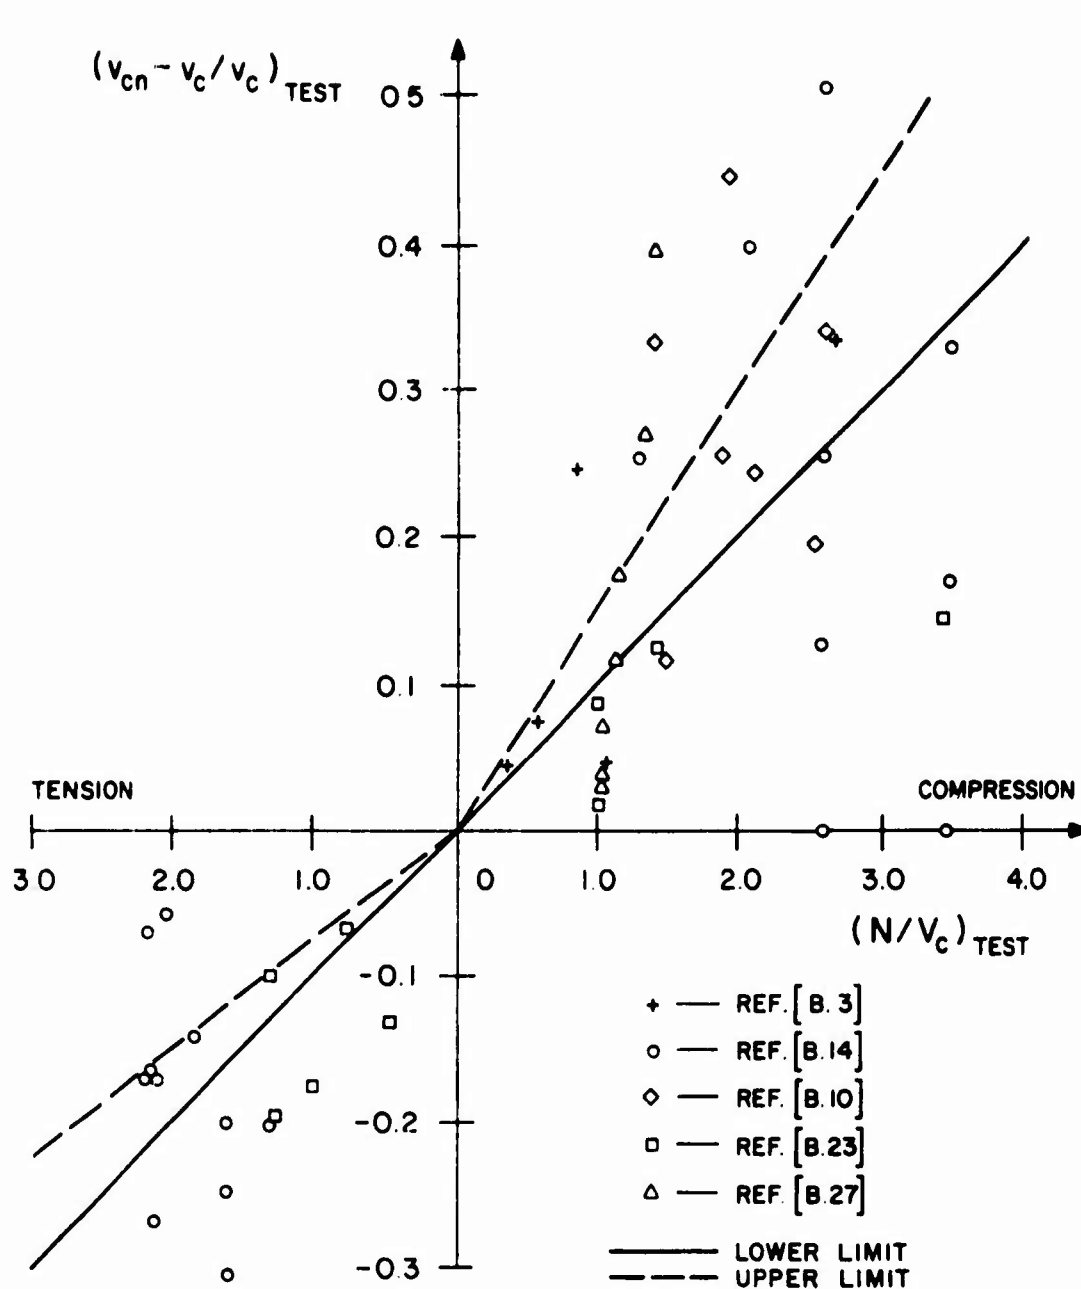


FIG. B. 15: DATA FOR INITIAL SHEAR CRACKING WITH AXIAL FORCE EFFECTS. (DATA FROM REF. [B. 3, 14, 10, 23, 27]).

in checking the equation. However, the data points on Fig. B.15 corresponding to reference B.14 were plotted after the equation check was made so that an independent set of tests were available to make the check.

In reference B.14, a recommendation is made to incorporate a cut-off value for large tensile forces; i.e. for N (tension) $> 4\sqrt{f'_c}$, V_c is to be taken equal to zero. It is argued that too much preliminary cracking caused by the tensile force destroys the shear resistance of the member. There is no such cut-off recommended with the failure criteria for the following reasons:

- a. All of the test results from reference B.14 do not support the recommendation made;
- b. The recommendation is based on one test for which the axial load was applied first, then the lateral load up to cracking, which is not realistic in an actual structure;
- c. The plotted results of the derived equation in Figure. B.20 did not indicate any trend to support the cut-off limit.

The basic failure criteria with axial force effect is:

$$F_3(x) - F(x) \leq 0 \quad (B.19)$$

where $F_3(x) = F_1(x) - \alpha \cdot F_4(x)$

$$F(x) = V(x)/bd\sqrt{f'_c}.$$

(3) Loading history effects: the effect of reversal of load on the shear strength of members was tested and results presented in reference B.2. Two conclusions are significant:

- a. It was found that cracking load associated with a reverse load is of the same order of magnitude as the initial cracking load, even in the presence of the initial diagonal crack;
- b. The repetition of a few high reverse loadings does not cause a significant decrease in the strength of beams failing in shear as compared to monotonic loading failure.

Therefore, it is assumed that the developed criteria is valid for any loading history consistent with a few cycles of loading effects.

(4) Modification:

- (a) Modification by coefficient: the suggested modification is made by increasing the slope of the basic function, equation B.11, but not the point of intersection at $F_1(x) = 1.5$. The horizontal cut-off line can be defined by the intersection with $F_2(x) = 3/7$ for each slope. The form for modification is defined below:

$$F_3^*(x) = \left([1.5 + C_3 \cdot F_2(x)] \leq \frac{3(7+2C_3)}{14} \right) - \alpha \cdot F_4(x) \quad (B.20)$$

$$\text{and } \alpha \text{ (tension)} = \alpha_t = 0.025(4. - C_4)$$

$$\alpha \text{ (compression)} = \alpha_c = 0.050(2. + C_4)$$

The range for coefficients C_3 and C_4 are defined by:

$$(3.5 \leq C_3 \leq \frac{35.}{6})$$

$$(0. \leq C_4 \leq 1.)$$

The upper limit function for $N(x) = 0$ is shown on Fig. B.12

corresponding to $C_3 = 35./6.$; the upper limit for α_t and α_c are shown on Fig. B.15 for $C_4 = 1.0$.

- (b) This failure criterion can be overridden since it is an indirect measure of a possible discontinuity. If it is ignored, the user

should realize that only the limitations of the flexural behavior are in effect, and unrealistic behavior is possible.

(5) Assumptions:

The shear crack in a member with several shear spans (see Fig. B.18), can be predicted by a criteria based on simple beam tests with or without an axial force.

B.3.2.2 DETECTION OF PRINCIPAL DIAGONAL CRACK PLUS YIELDING OF WEB REINFORCEMENT LEADING TO FAILURE.

If a diagonal crack occurs in a member with web reinforcement, material separation is prevented by the bars intersected by the crack. The only form of web reinforcement considered is the closed form normal to the longitudinal reinforcement.

There are two behavior conditions which describe ultimate failure states for a member with web reinforcement [B.14, 30]:

- a. The diagonal crack may propagate through the member and cause sudden yielding of the web reinforcement at the crack location;
- b. The diagonal crack may be contained by the web reinforcement until crushing of the reduced compression zone at an increased load before or after the web steel yields.

In addition, experimental tests have shown that the stress in the web bars at the crack remain very small until the significant diagonal crack forms [B.7, 9, 11, 25]. This is due to the fact that brittle materials possess low extensibility [B.36].

To predict shear-flexure failure of a member with web reinforcement requires some measure of the behavior after the formation of the diagonal crack. This means that the stress in the web bars intersected by the crack must be predicted since subsequent behavior depends on the containment of the crack by these bars. However, to predict the destruction of the compression zone above the crack requires some knowledge of the size of the compression zone and the stress concentration effects in the localized region. This is beyond the model capability. Therefore, the limit state considered for this failure mode is the detection of the yielding of web reinforcement in the range of the crack. As long as the web bars are below

the yield stress, the element is considered to be reliable. Beyond the yielded state, the element model is considered to be invalid, and the behavior cannot be accurately predicted.

An approximate measure of the web steel stress can be computed indirectly. The form of a prediction expression can be developed on the basis of measured stirrup strain during loading (See Fig. B.16). Accordingly, the assumed stress variation is zero up to the cracking load, and thereafter is a linear function of the applied load;


$$\begin{aligned}
 a_1, a_2 &= \text{constants} & \epsilon_v &= a_1 + a_2 P \\
 P_c &= \text{cracking load} & a_1 + a_2 P_c &= 0 \\
 \epsilon_v &= \text{web steel strain} & \epsilon_v &= a_2 (P - P_c) \\
 P &= \text{applied load}
 \end{aligned} \tag{B.21}$$

If it is also assumed that the shear force at a section is proportional to the applied loads, then:

$$\begin{aligned}
 C &= \text{constant} & \epsilon_v &= C (V - V_c) \\
 V &= \text{shear at section} & \epsilon_v &= \frac{f_v}{E} \\
 V_c &= \text{cracking shear at section} & f_v &= C' (V - V_c) \\
 f_v &= \text{web steel stress} \\
 E &= \text{linear modulus for web steel} \\
 C' &= C \cdot E = \text{constant}
 \end{aligned} \tag{B.22}$$

This corresponds to the same form accepted by the ACI code (318-71) and used by others in describing test results [B.14, 17, 30, 38]; i.e.:

$$\begin{aligned}
 b &= \text{width of member} & v &= r f_{vy} + v_c \\
 d &= \text{effective depth} & r &= \frac{A_v}{bs} ; v = \frac{V}{bd} ; v_c = \frac{V_c}{bd} \\
 A_v &= \text{total web steel area at} \\
 &\quad \text{one section} = A_b \times \text{no.} \\
 &\quad \text{of legs} & f_{vy} &= \frac{S}{d A_v} (V - V_c)
 \end{aligned} \tag{B.23}$$

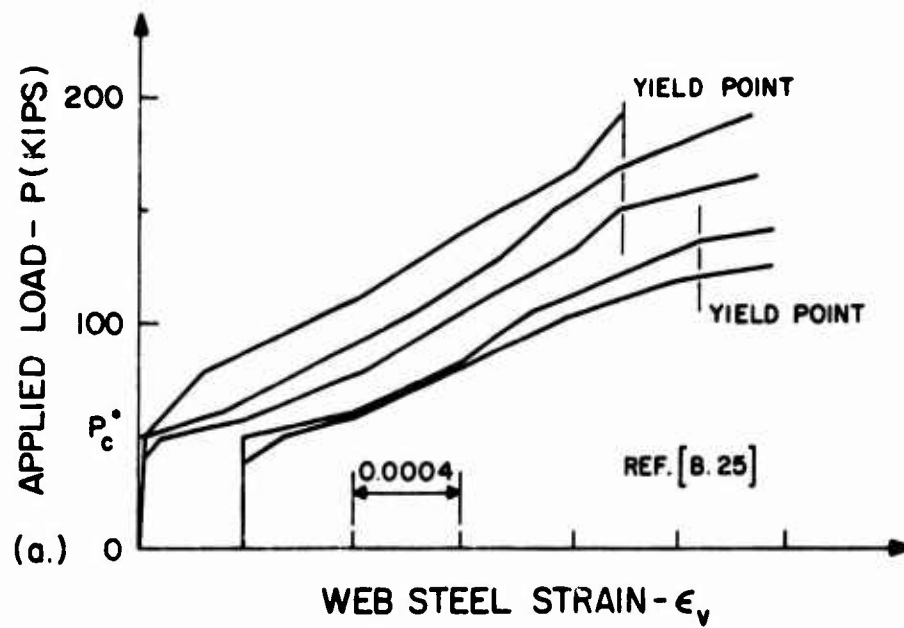

P_c = LOAD AT CRACKING

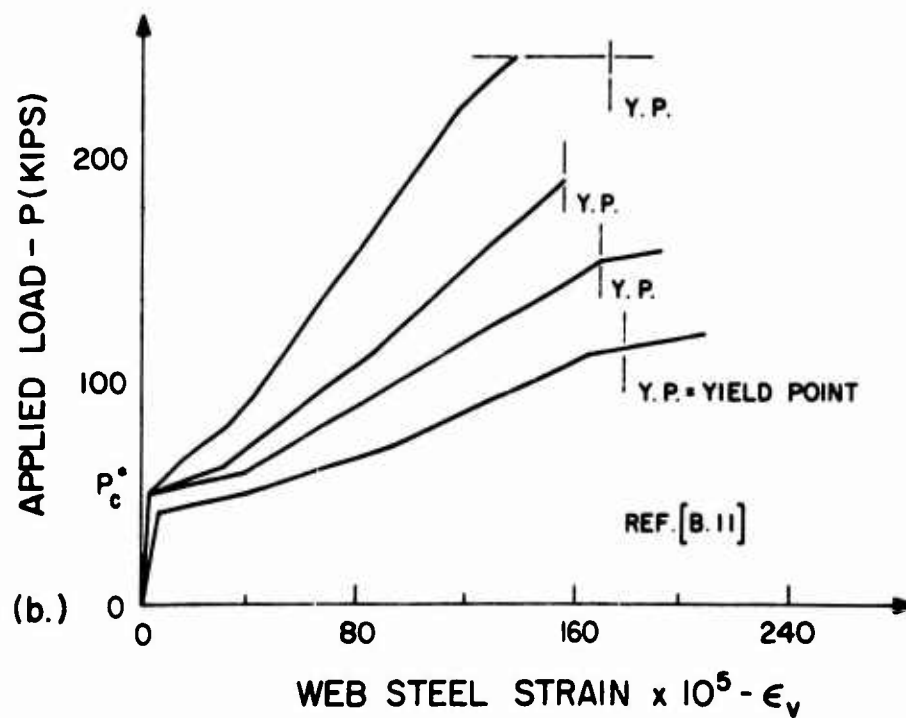


FIG. B.16: WEB STEEL STRAIN AS A FUNCTION OF APPLIED LOAD
(DATA FROM REF. [B. 11, 25])

S = web bar spacing

f_v, V, V_c = defined above

If it is assumed that the crack is inclined to the longitudinal axis at approximately 45° , then (d/S) is a measure of the number of bars (n) crossing the crack; i.e., $n = d/S$.

According to observations, all of the web bars crossing a physical crack are affected by that crack. In addition, by the time the ultimate behavior state is reached, all of these bars can yield, [B.14,7]. All of the bars at a crack should be included in the total effect, although each stress cannot be predicted independently. Therefore, the total area, $(n \cdot A_v)$, is used in the equation.

The average stress value for the web bars crossing a crack for any value of shear force is given by the equation for f_v (equation B.22) with $C' = S/dA_v$; i.e.:

$$f_v = \frac{S}{dA_v} \cdot (V - V_c)$$

To introduce a lower bound measurement for yielding, the data plotted in Fig. B.17 is used. The lower limit function can be defined by the equation:

$$f_{vy} = \frac{4}{3} \cdot \frac{S}{dA_v} \cdot (V - V_c) \quad (B.24)$$

which is valid at yielding conditions only. To introduce f_v at any stress state, the relationship must be made an inequality; i.e.:

$$f_{vy} > \frac{4}{3} \cdot f_v : \text{before yielding}$$

$$f_{vy} \leq \frac{4}{3} \cdot f_v : \text{at or after yielding.}$$

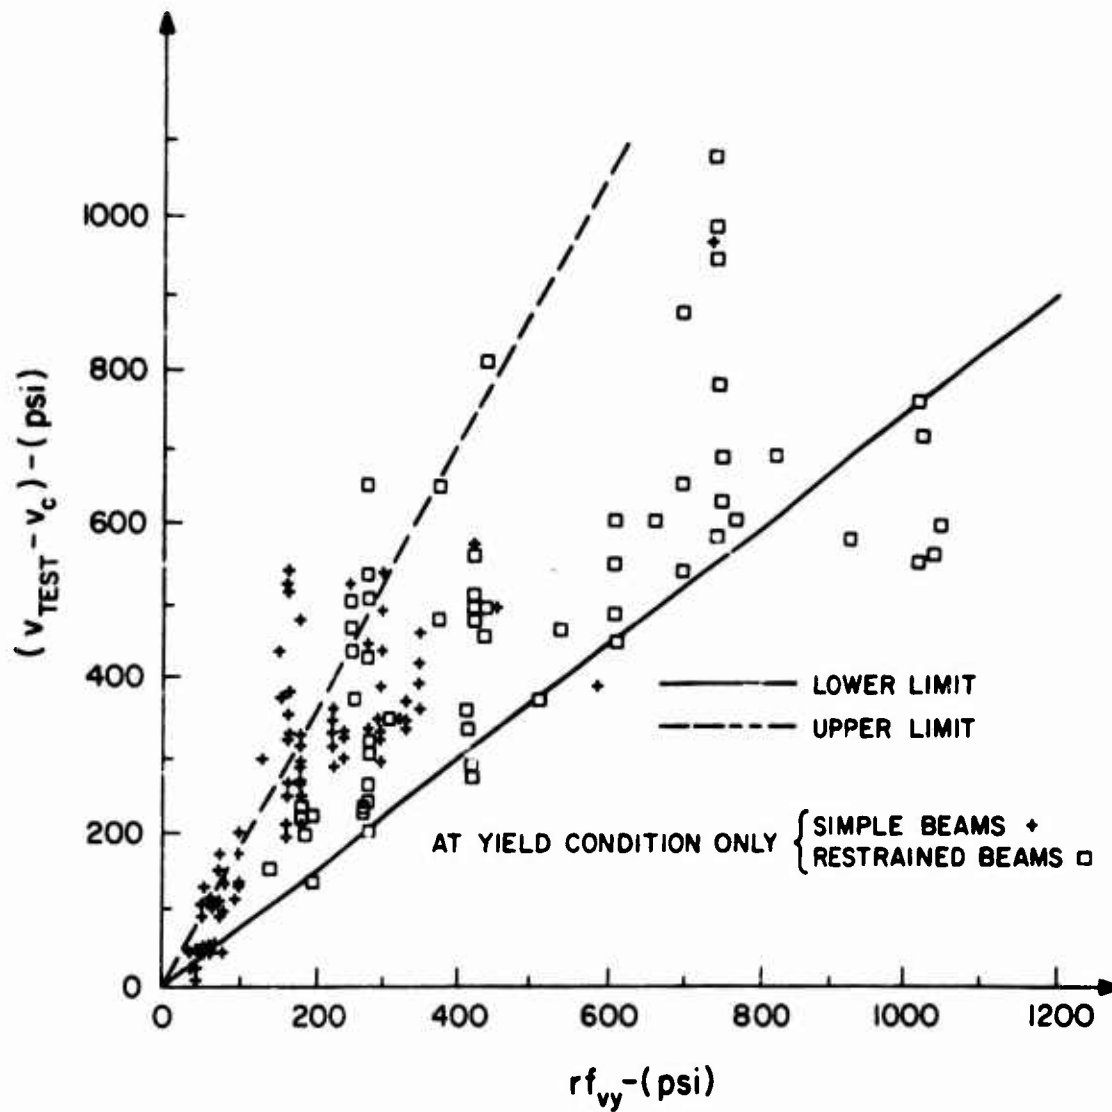


FIG. B. 17: ULTIMATE STRENGTH MEASUREMENT WITH NORMAL WEB REINFORCEMENT (DATA FROM REF. [B. 30]).

(1) Basic failure criterion : based on an equation to approximate the web steel stress at a crack:

$$f_{vy} - \frac{4}{3} f_v \leq 0 \quad (B.25)$$

where f_{vy} = yield stress in web reinforcing bars

$$f_v = \frac{S}{dA_v} (V - V_c) .$$

By introducing $F(x)$ and $F_1(x)$ defined in section B.3.2.1, and arranging the expression in a dimensionless form, it can be re-written as shown below:

$$1. - \frac{4}{3} \cdot \frac{Sb}{A_v} \cdot \frac{\sqrt{f'_c}}{f_{vy}} \cdot [F(x) - F_1(x)] \leq 0 . \quad (B.26)$$

An upper limit for the value of $(V - V_c)$, as recommended by the ACI Code, is not included in the criterion for two reasons:

- (a) Test results indicate that the upper limit is not consistent with physical behavior [B.14];
- (b) A natural upper limit to failure for large values of $(V - V_c)$ is available through the flexural failure criteria .

(2) Axial force effect: this is to measure the effect of an axial force, tension or compression, on the physical behavior of web reinforcement after cracking. Although data is scarce, reference B.14 provides results to indicate that the contribution of web reinforcement to the total strength is approximately independent of both the axial force and the ratio (a/d) . These results were for limited variations of the parameters, but they form the basis for the criterion statement. The measure of the limit state for the shear strength of a member with web reinforcement as defined above is assumed to be valid for a moderate axial force, either compression or tension. It should be mentioned that some effect is already built into

the expression through V_c as defined by V_{cn} in section B.3.2.1. The quantity that is assumed to remain unaffected is $(V-V_c)$ or $(V-V_{cn})$. The expression which includes the axial force effect should be expressed as follows:

$$V - \frac{4}{3} \cdot \frac{sb}{A_v} \cdot \frac{\sqrt{f'_c}}{f_{vy}} \cdot [F(x) - F_3(x)] \leq 0 \quad (B.27)$$

where $F_3(x) = V_{cn} / bd\sqrt{f'_c}$

(3) Loading history effects: the question is whether unloading or reversal of loading has any effect on the basic behavior of web reinforcement. The results presented in reference B.2 included behavior of beams with web reinforcement subjected to a few reversed loading cycles. The conclusion stated in section B.3.2.1, part 3 is applicable to this part also; i.e., the repetition of a few reversed loadings does not cause a significant decrease in the strength of beams failing in shear as compared to monotonic loading failure. The criterion stated remains valid with load reversal.

(4) Modification:

(a) Modification by coefficient: the web strength criterion can be altered by a coefficient which changes the slope of the function shown in Fig. B.17; i.e.:

$$f_{vy} = C_5 \cdot \frac{s}{dA_v} \cdot (V-V_c)$$

The suggested relationship developed in reference B.14 to fit a specific set of data was defined to be:

$$1.75rf_{vy} = v_u - v_c, \text{ where } v_u = \text{ultimate shear stress.}$$

This equation is plotted on Fig. B.17 and it appears to be a suitable upper bound. Accepting this function as defining an

upper bound value for C_5 , the modified form of the criterion can be written as:

$$1. - C_5 \cdot \frac{s_b}{A_v} \cdot \frac{\sqrt{f'_c}}{f_{vy}} \cdot [F(x) - F_3^*(x)] \leq 0 \quad (B.28)$$

for $(4/7 \leq C_5 \leq 4/3)$

and $F_3(x)$ is included in its modified form $F_3^*(x)$, (equation B.20).

- (b) this criterion can be overridden since it is an indirect measure of the web steel stress. If it is ignored, only the flexural behavior limitations are in effect.

(5) Assumptions:

- (a) Web bars are anchored sufficiently to insure yield strength development;
- (b) Element model remains valid after the formation of the diagonal crack up to the web yield state;
- (c) The web steel strain is linearly related to the applied load after crack formation;
- (d) All bars affected by the crack yield at the measured limit state.

B.3.3 AXIAL FORCE FAILURE

The limit states developed in this failure category relate to the discontinuities encountered in the behavior of a member dominated by normal stresses caused predominantly by an axial force. The distinction between this category and the category for normal stress effects due to flexure (B.3.1.) is that the point of zero strain at a specified section falls outside of the physical dimensions. Hence, the state of stress is either tension or compression over the entire cross section. The failure modes which require a failure criteria are shown in Fig. B.4.

The failure modes are similar to those for flexure; i.e., compressive failure means either crushing of the concrete or the simultaneous crushing and bar buckling in the critical compression zone; and tensile failure is the fracture of longitudinal bars. Therefore, the same failure criteria are applicable. In the axial force category, the secondary stresses are caused by bending. But since both are included in the normal strain state, these secondary effects are automatically accounted for in the failure criteria. This is similar to the secondary axial force effects automatically included in the flexural failure criteria.

B.3.3.1 CONCRETE CRUSHING

Failure criterion: same as section B.3.1.1.

B.3.3.2 STEEL FRACTURE

Failure criterion: same as section B.3.1.2.

B.3.3.3 BAR BUCKLING AND CONCRETE CRUSHING SIMULTANEOUSLY.

Failure criterion: same as section B.3.1.3.

B.3.3.4 STEEL FRACTURE

Failure criterion: same as section B.3.1.2.

B.3.4 SUMMARY OF FAILURE CRITERIA

Basic Form of Failure Criteria Expressions:

$$[(\text{Specific Criterion Value}) - (\text{Computed Model Value})] \leq 0$$

All criteria are expressed in a dimensionless form except for B.3.1.1 as noted.

(B.3.1) Flexural Failure

(B.3.1.1) Concrete Crushing:

$$\epsilon_{f1}^* - \epsilon_c \leq 0$$

ϵ_c - Compression

$$\epsilon_{f1}^* = C_1 \cdot \left[\left(\frac{3 + 0.002f'_c}{f'_c - 1000} \right)^c \leq 0.0035 \right]$$

$$(1. \leq C_1 \leq 1.23)$$

Default: $C_1 = 1$

override: not possible

Note: Constants in the expression for ϵ_{f1}^* are not dimensionless, even though the total expression is dimensionless.

(B.3.1.2) Steel Fracture: $\epsilon_{f2} - \epsilon_s \leq 0$

ϵ_s - tension

ϵ_{f2} = maximum strain value defined for stress-strain function.

override: not possible

(B.3.1.3) Bar Buckling and
Concrete Crushing Simultaneously:

$$C_2 \cdot \frac{\pi^2}{16} \cdot \left(\frac{D}{S} \right)^2 \cdot \left(\frac{E_t}{F_s} \right) - 1. \leq 0$$

f_s - compression

$$(1. \leq C_2 \leq 4.)$$

Default: $C_2 = 2$

override: possible

(B.3.1.4) Steel Fracture: (Same as B.3.1.2)

(B.3.2) Shear-Flexure Failure

(B.3.2.1) Detection of the Principal
Diagonal Crack Leading to
Failure:

$$F_3^*(x) - F(x) \leq 0$$

$$F_3^*(x) = \{ [1.5 + C_3 \cdot F_2(x)] \leq \frac{3(7 + 2C_3)}{14} \} - \alpha \cdot F_4(x)$$

$$(3.5 \leq C_3 \leq 35./6.)$$

$$\text{Default: } C_3 = 3.5$$

$$\alpha \begin{cases} \text{Tension: } \alpha_t = 0.025(4. - C_4) \\ \text{Compression: } \alpha_c = 0.050(2. + C_4) \end{cases}$$

$$(0. \leq C_4 \leq 1.)$$

$$\text{Default: } C_4 = 0$$

override: possible

(B.3.2.2) Detection of the Principal
Diagonal Crack Plus Yielding
of the Web Reinforcement
Leading to Failure:

$$1. - C_5 \cdot \frac{s_b}{A_v} \cdot \frac{\sqrt{f'_c}}{f_{vy}} \cdot [F(x) - F_3^*(x)] \leq 0$$

$$(4/7 \leq C_5 \leq 4/3)$$

$$\text{Default: } C_5 = 4./3$$

override: possible

(B.3.3) Axial Force Failure

(B.3.3.1) Concrete Crushing: (same as B.3.1.1)

(B.3.3.2) Steel Fracture: (same as B.3.1.2)

(B.3.3.3) Bar Buckling and
Concrete Crushing
Simultaneously: (same as B.3.1.3)

(B.3.3.4) Steel Fracture: (same as B.3.1.2)

B.4 IMPLEMENTATION

The application of the failure criteria is made at an equilibrium configuration for the system and at critical sections within each element. The implementation defines the critical sections used and describes the general application procedure.

B.4.1 ASSUMPTIONS

In addition to the assumptions made for the various failure criteria developed in B.3, the following assumptions are made with respect to the implementation of these criteria:

1. A single element has uniform reinforcement properties, in longitudinal and web steel, over the entire length. If a member has variable reinforcement properties, e.g., a region with web reinforcement and a region without, the failure criteria will be utilized more effectively by modeling the member with more than one element to reflect, at least approximately, the actual reinforcement uniformity.
2. General beam shear-flexure behavior can be effectively related to criteria based on simple beam test results by defining analogous segments within the model. The analogous segments, or shear spans, are defined by lengths measured from a point of zero moment to a nodal point, or from one nodal point to another. (Refer to Fig. B.18).
3. The most probable section for failure in an element is defined by the critical section. A critical section is prescribed for each failure criteria, and only the critical sections in each element

P_1, P_2 = CONCENTRATED OR EQUIVALENT NODAL FORCES
 a, b, c, d = NODAL POINTS FOR THE MEMBER

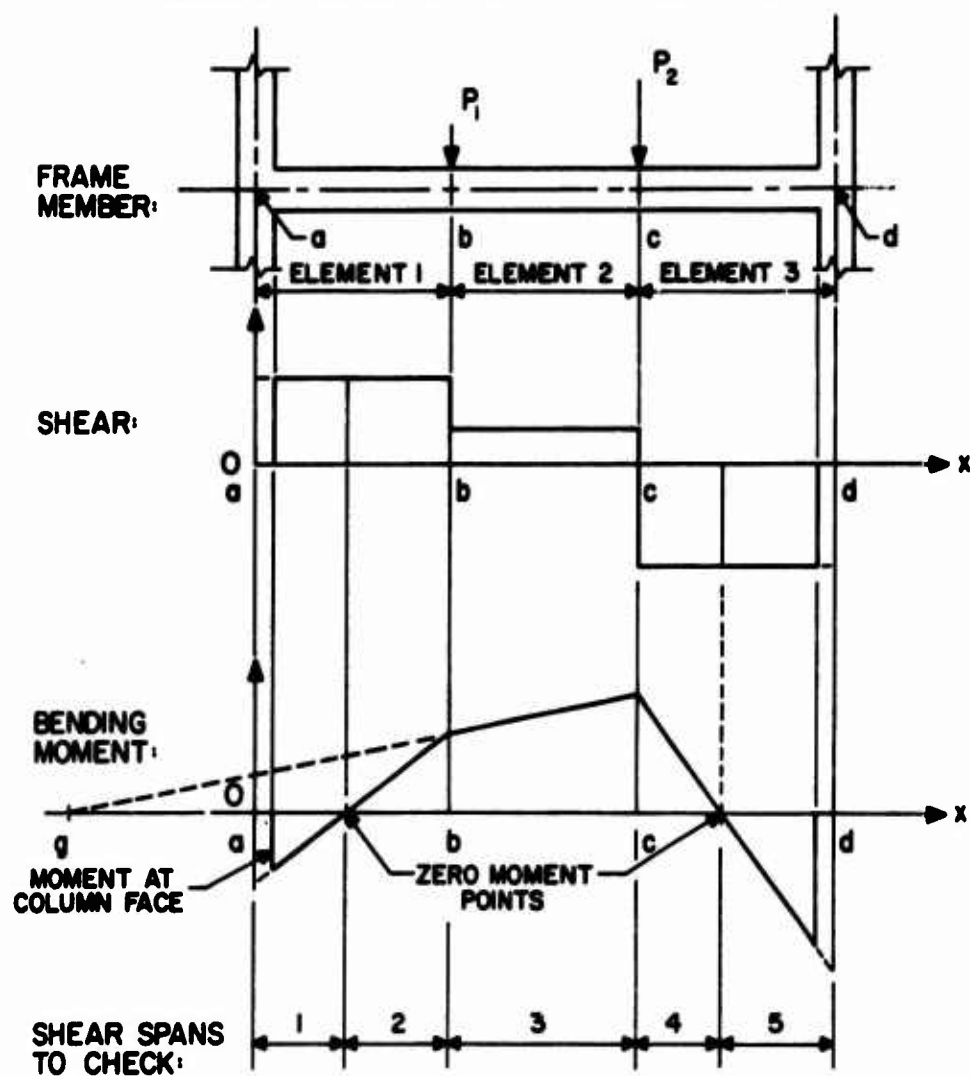


FIG. B. 18: POSSIBLE FRAME MEMBER STATE WITH SHEAR SPANS DEFINED.

are checked for failure.

4. An element defined with a length less than the effective depth d will not be checked for shear failure, but will be checked for flexural and axial failure.
5. The equivalent distance from zero moment to the critical section at the crack location, measured by $(V(x)/M(x))$ in the shear cracking equation, is the same regardless of the superimposed uniform strain caused principally by an axial force.

B.4.2 CRITICAL SECTIONS

Critical sections are the prescribed section locations where the various criteria are applied. It represents, in each case, the most probable location for failure consistent with the model representation of the actual member and applied loading. In applying the criteria, each element tested is treated as an independent unit, even though several elements may be joined together to represent a single physical member.

Failure due to flexural and axial force effects are related to maximum normal strain states in an element. For the element model used, this state occurs at one of the end sections. The end sections are then the critical sections for these two criteria, defined in B.3.1 and B.3.3. There is one exception to this definition: when an element has one or both nodal points located at a junction of two members normal to each other, e.g., a horizontal member intersecting a column member, the critical section is defined at the face of the normal member rather than at the nodal point. This can be seen in Fig. B.18 at nodal point a and d.

Failure due to shear effects, with criteria defined in B.3.2, is detected by an indirect measure that includes material properties,


dimensions of the cross section, and a measure of shear span length. The critical section is defined by a conservative estimate of the location of the mid depth of the complete diagonal crack within the shear span . This location is specified for all shear span lengths in Fig. B.19.

Others have suggested locations for the critical section in a shear span. The following list shows a reference with the critical location used which agreed with the data from the corresponding tests:


Reference	Critical Section Location $x_{cs} \ (a \geq 2d)$
B.10	0.5 a
B.17	0.6 a (a - 2d for a > 5d)
B.27	0.5 a
B.30	a - d

All tests involved were with simple beam conditions, and the cracking stress equations used in each case were of a similar basic form to the one used in the criteria.

Within a shear span associated with a simple beam structure with a single concentrated force, the lowest critical cracking stress defined by the criteria is at the point of the load. That section is the most conservative location for the critical section. However, it is not realistic to use this section because the crack has to have some room to form before the load is encountered. Therefore, the critical section is usually chosen some distance from the point of the load. If the crack is assumed to have a projected length equal to d, then (a - d) is the most conservative realistic choice. Test observations indicate that the location is actually closer

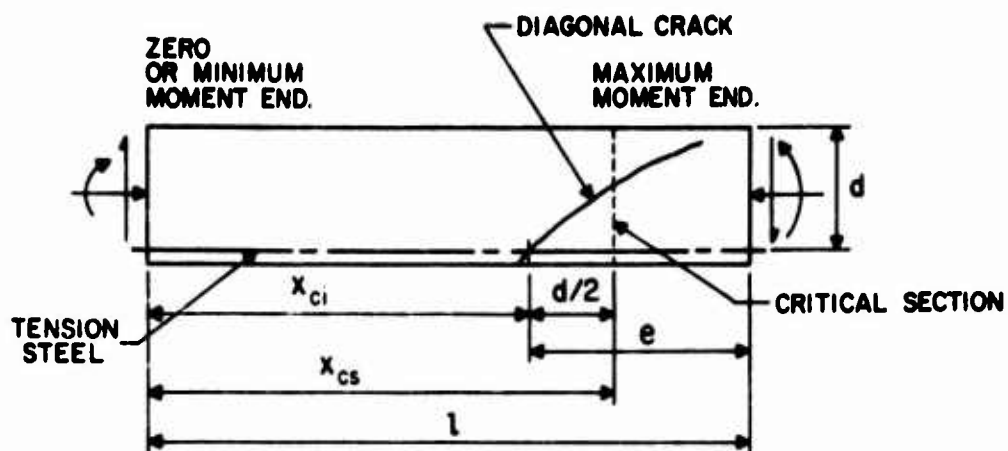

(a)

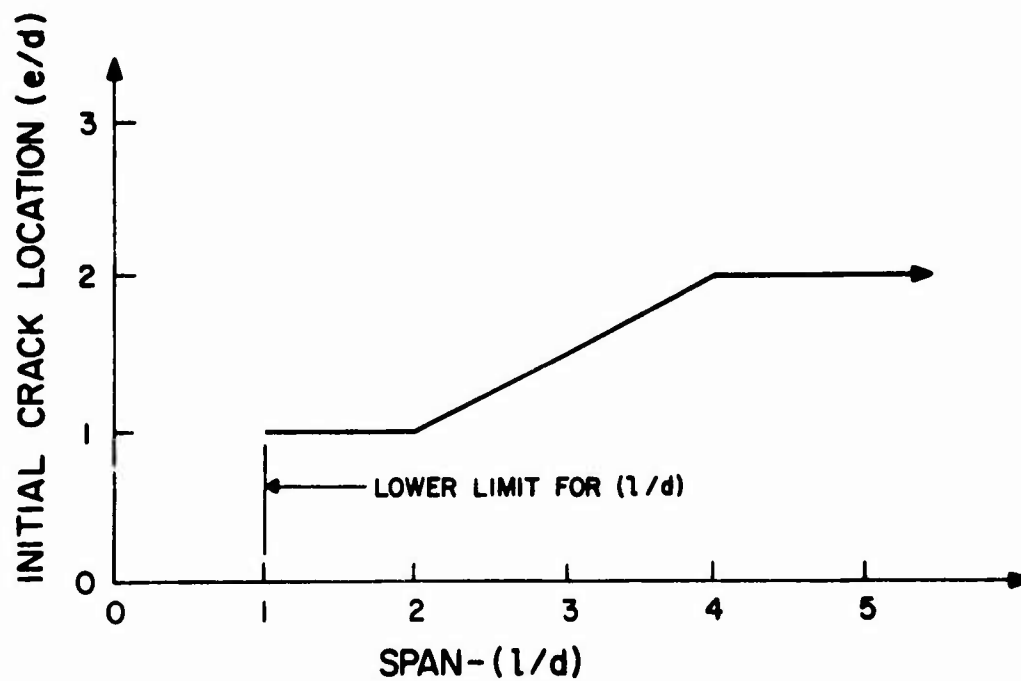

(b)

FIG. B. 19: CRITICAL SECTION FOR DIAGONAL CRACKING

to the middle of the span a . The location used with a specific cracking equation must be balanced with the form and conservativeness of the equation itself to produce realistic and conservative results. This is the final decision basis. The location chosen for the criteria is a reasonable balance between the most conservative location and the observed locations. It has also been checked with a variety of test data and compared with the ACI Code equation. These results are shown in Fig. B.20.

A summary of the locations for critical sections associated with each failure criteria is shown below:

<u>Failure Criteria</u>	<u>Critical Sections for an element</u>
1. Flexural failure:	End sections, at the nodal points, or at the face of an intersecting member.
2. Shear-flexure failure:	Section at the mid-depth of the diagonal crack - defined in Fig. B.19.
3. Axial force failure:	(same as for flexural failure)

B.4.3 CHECKING PROCEDURE

The two general element states, characterized by the internal stress distribution, are represented by element (a - b) and element (b - c) in Fig. B.18. In the first, there is a zero moment condition within the element; the second has no such condition.

In the first element (a - b), the flexural and axial force checks can be made at the critical sections for the element as defined previously. However, the shear check must be made for both shear spans defined; i.e. from the zero moment section to each nodal point (shear spans 1 and 2 in

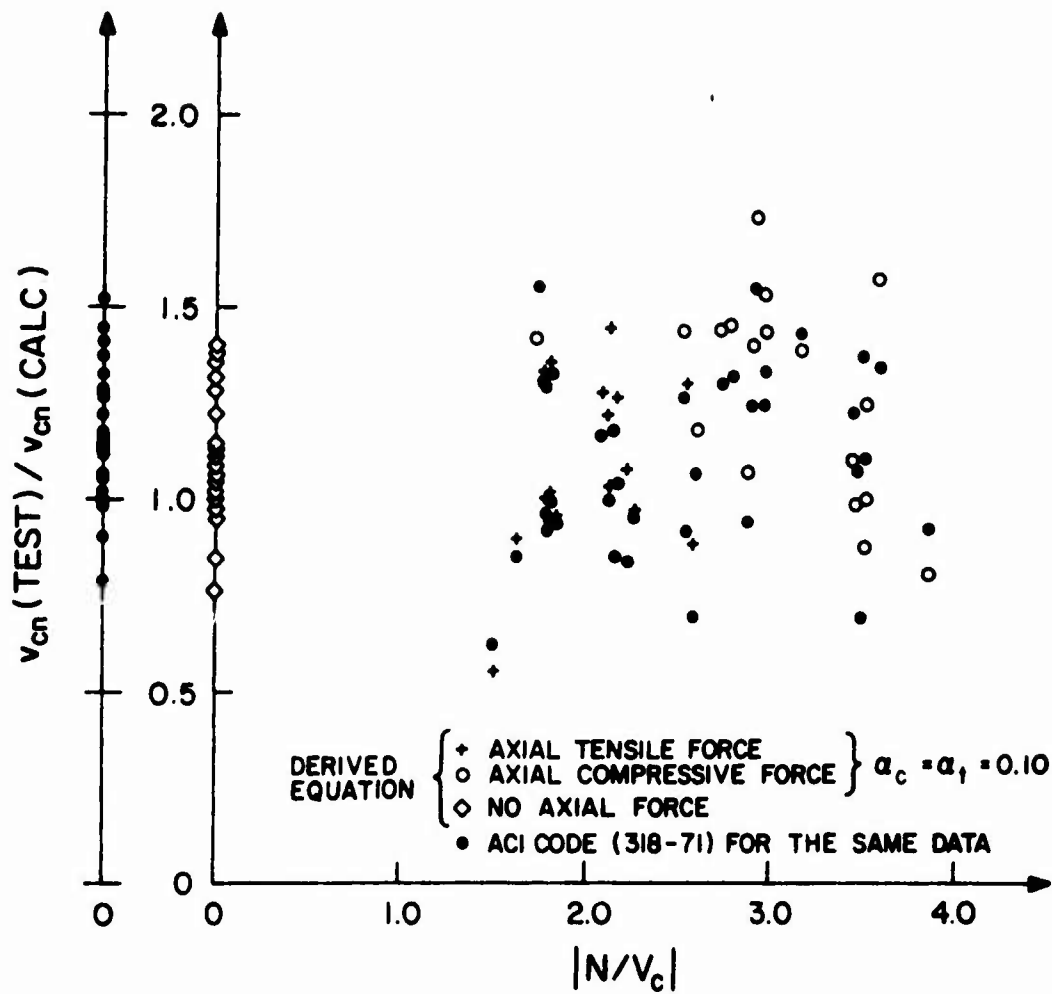


FIG. B. 20: CHECK OF THE DERIVED EQUATION FOR SHEAR-FLEXURE FAILURE (DATA FROM REF. [B. 14]).

the figure). Therefore, the zero moment section must be located. It is defined as the section with a uniform strain distribution.

In the second element state, (b - c), the flexural and axial criteria are applied as before, while the shear criteria can be applied to the given state directly. The application of the shear criteria to this element is equivalent to applying these expressions to a shear span defined by the length (g - c) in Fig. B.18. The length (g - c) is referred to as the equivalent shear span for element (b - c), and it has the approximate value given by:

M_b = bending moment at b

V_{bc} = shear in (b - c)

L = length

$$L_{gc} = \frac{M_b}{V_{bc}} + L_{bc}$$

When a single member is composed of several elements, the question arises concerning the adequacy of an independent check of each element to represent the behavior of the whole member. In other words, is it possible that the total member might fail if it is modeled as a single element, whereas the independent checking of component elements might not detect failure? It has been demonstrated by physical testing of restrained beams that the most likely region for cracking is in the span with the largest shear force, such as element (c - d); (reference B.26).

To verify that the criteria expressions would be consistent with this behavior, an idealized analysis was performed using a member composed of two elements subjected to the possible combinations of bending moment in each span, e.g. the two spans (a - b) and (b - c). The independent checks produced realistic failure predictions. The results showed that the cracking

is less likely in (b - c) and more likely in an adjacent span with larger shear force (a - b) as the moments at b and c approach equality. It was also shown that if the bending moments M_a , M_b and M_c define a linear function with x , and $M_a = 0$, then the failure of element (b - c) would be identical to the failure of the total member (a - c) provided the same critical section is used, and provided both spans have identical properties. Therefore, checking each element of a member independently will accurately reflect the physical behavior of the total member; i.e., the most likely failure region will be detected first.

The general procedure used in checking for failure is indicated in the flow sequence shown in Fig. B.21, where,

- critical strain values = strain values at the extremities of the end sections of an element;
- section of zero moment = section with a uniform strain state;
- equivalent shear span = distance from the zero moment section (outside of the element length) to the section of maximum moment.

Flexural failure checks (B.3.1) are required at both ends rather than just at the end with the maximum moment since an element may be reinforced unsymmetrically with respect to number, diameter, and location of longitudinal bars. By the same reasoning, the axial force failure checks (B.3.3) are also made at both ends of an element.

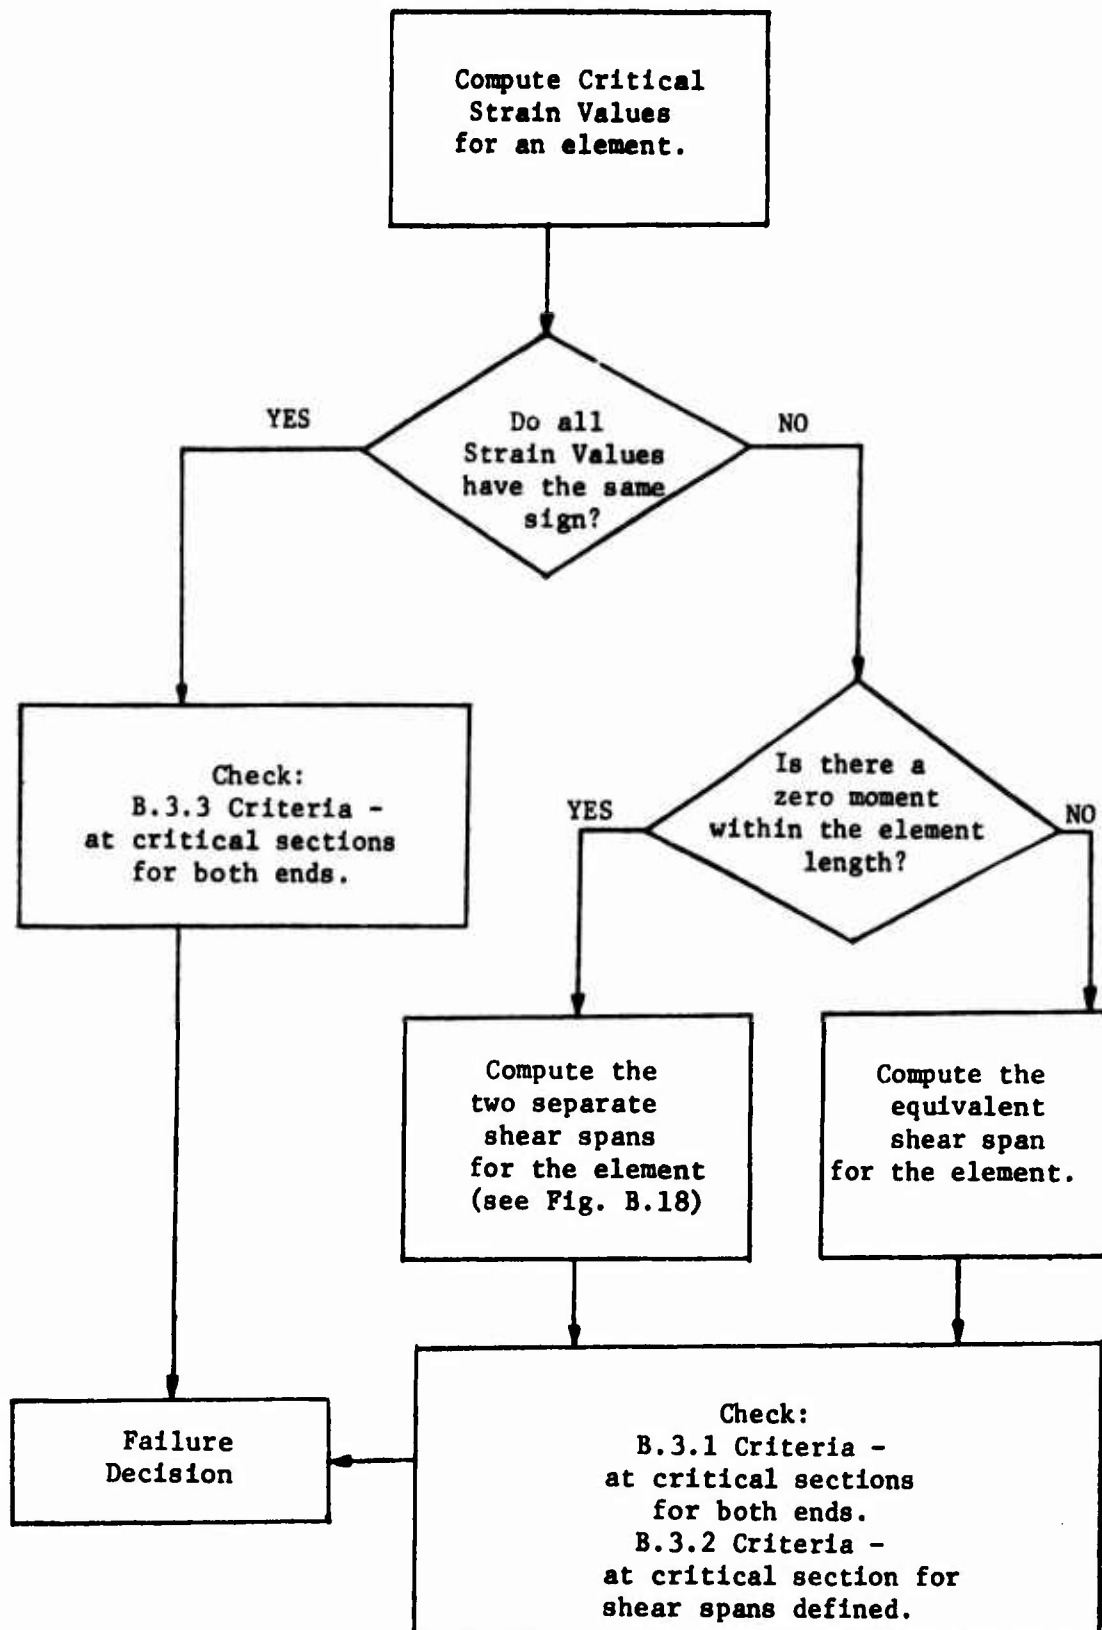


Fig. B.21: General Sequence for Implementation of the Failure Criteria

REFERENCES

- B1. Agrawal, G. L., Tulin, L. G., and Gerstle, K. H., "Response of Doubly Reinforced Beams to Cyclic Loading," Journal ACI, Vol. 62, No. 7, July 1965, pp. 823-835.
- B2. Alatorre, G. and Casillas, J., "Shear Strength Behavior of Concrete Beams Subjected to Alternate Loads," RILEM, International Symposium on the Effects of Repeated Loading of Materials and Structural Elements, Mexico City, 15-17 September 1966.
- B3. Baldwin, J. W., Jr., and Viest, I. M., "Effect of Axial Compression on Shear Strength of Reinforced Concrete Frame Members," Journal ACI, Vol. 55, No. 5, November 1958, pp. 635-654.
- B4. Bertero, V. V., Bresler, B., and Liao, H., "Stiffness Degradation of Reinforced Concrete Members Subjected to Cyclic Flexural Moments," Univ. of California, Berkeley Earthquake Engineering Research Center, Report No. EERC 69-12, December 1969, p. 115
- B5. Bresler, B. and Gilbert, P. H., "Tie Requirements for Reinforced Concrete Columns," Journal ACI, Vol. 58, No. 5, November 1961, pp. 555-570.
- B6. Bresler, B., "Behavior of Structural Elements, A Review," Building Practices for Disaster Mitigation, Proc. of Workshop, Aug. 28 - Sept. 1, 1972, U. S. Dept. of Commerce, Building Science Series 46, February 1973, pp. 286-351.
- B7. Bruce, R. N., "The Action of Vertical, Inclined, and Prestressed Stirrups in Prestressed Concrete Beams," Journal of the Prestressed Concrete Institute, Vol. 9, No. 1, February 1964, pp. 14-25.
- B8. Burns, N. H. and Siess, C. P., "Repeated and Reversed Loading in Reinforced Concrete," Journal Struct. Div., ASCE, Vol. 92, No. ST 5, October 1966, pp. 65-78.
- B9. Clark, A. P., "Diagonal Tension in Reinforced Concrete Beams," Journal ACI, Vol. 48, No. 2, October 1951, pp. 145-156.
- B10. Diaz de Cossio, R. and Siess, C. P., "Behavior and Strength in Shear of Beams and Frames Without Web Reinforcement," Journal ACI, Vol. 56, No. 8, February 1960, pp. 695-735.
- B11. Elstner, R. C., Moody, K. G., Viest, I. M., and Hognestad, E., "Shear Strength of Reinforced Concrete Beams - part 3 - Tests of Restrained Beams with Web Reinforcement," Journal ACI, Vol. 51, No. 6, February 1955, pp. 525-539.

- B12. Fergusen, P. M., "Some Implications of Recent Diagonal Tension Tests," Journal ACI, Vol. 53, No. 2, August 1956, pp. 157-172.
- B13. Granholm, H., A General Flexural Theory of Reinforced Concrete, John Wiley & Sons, 1965.
- B14. Haddadin, M. J., Hong, S., and Mattock, A. H., "Stirrup Effectiveness in Reinforced Concrete Beams with Axial Force," Journal Struct. Div., ASCE, Vol. 97, ST 9, September 1971, pp. 2277-2297.
- B15. Hognestad, E., "Confirmation of Inelastic Stress Distribution in Concrete," Journal Struct. Div., ASCE, Vol. 83, ST 2, March 1957, pp. 1189-1 - 1189-17.
- B16. Kani, G. N. J., "The Riddle of Shear Failure and its Solution," Journal ACI, Vol. 61, No. 4, April 1964, pp. 441-467.
- B17. Krefeld, W. J. and Thurston, C. W., "Studies of the Shear and Diagonal Tension Strength of Simply Supported Reinforced Concrete Beams," Journal ACI, Vol. 63, No. 4, April 1966, pp. 451- 476.
- B18. Kriz, L. B., "Ultimate Strength Criteria for Reinforced Concrete," Journal of EM. Div., ASCE, Vol. 85, EM 3, July 1959, pp. 95-110.
- B19. Kriz, L. B. and Lee, S. L., "Ultimate Strength of Over-Reinforced Beams," Journal EM Div., ASCE, Vol. 86, EM 3, June 1960, pp. 95-105.
- B20. MacGregor, J. G. and Hanson, J. M., "Proposed Changes in Shear Provisions for Reinforced and Prestressed Concrete Beams," Journal ACI, Vol. 66, No. 4, April 1969, pp. 276-288.
- B21. Mathey, R. G. and Watstein, D., "Shear Strength of Beams Without Web Reinforcement Containing Deformed Bars of Different Yield Strengths," Journal ACI, Vol. 60, No. 2, February 1963, pp. 183-207.
- B22. Mattock, A. H., "Rotational Capacity of Hinging Regions in Reinforced Concrete Beams," Proc. Int. Symposium on Flexural Mechanics of Reinforced Concrete, Miami, Florida, Nov. 10 - 12, 1964, ASCE-ACI Publ. SP-12 (1965), pp. 143-181.
- B23. Mattock, A. H., "Diagonal Tension Cracking in Concrete Beams with Axial Forces," Journal of Struct. Div., ASCE, Vol. 95, ST 9, September 1969, pp. 1887-1900.
- B24. McClure, G. S., Gerstle, K. H., Tulin, L. G., "Sustained and Cyclic Loading of Concrete Beams," Journal Struct. Div., ASCE, Vol. 99, ST 2, February 1973, pp. 243-257.

- B25. Moody, K. G., Viest, I. M., Elstner, R. C. and Hognestad, E., "Shear Strength of Reinforced Concrete Beams - part 1 - Tests of Simple Beams," Journal ACI, Vol. 51, No. 4, December 1954, pp. 317-332.
- B26. Moody, K. G., Viest, I. M., Elstner, R. C., and Hognestad, E., "Shear Strength of Reinforced Concrete Beams - part 2 - Tests of Restrained Beams Without Web Reinforcement," Journal ACI, Vol. 51, No. 5, January 1955, pp. 417-434.
- B27. Morrow, J. and Viest, I. M., "Shear Strength of Reinforced Concrete Frame Members Without Web Reinforcement," Journal ACI, Vol. 53, No. 9, March 1957, pp. 833-869.
- B28. Newman, K. and Newman, J. B., "Failure Theories and Design Criteria for Plain Concrete," Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, Sponsor: Univ. of Southampton, RILEM, and the Concrete Society, (ed.) Te'eni, M., April 1969, pp. 963-995.
- B29. Park, R., Kent, D. C., and Sampson, R. A., "Reinforced Concrete Members with Cyclic Loading," Journal Struct. Div., ASCE, Vol. 98, No. ST 7, July 1972, pp. 1341-1360.
- B30. Report of ACI-ASCE Comm. 326, "Shear and Diagonal Tension," Journal ACI, Vol. 59, No. 1, January 1962, pp. 1-30, No. 2, February 1962, pp. 277-334, No. 3, March, 1962, pp. 352-396.
- B31. Ruiz, W. M. and Winter, G., "Reinforced Concrete Beams Under Repeated Loads," Journal of Struct. Div., ASCE, Vol. 95, ST 6, June 1969, pp. 1189-1211.
- B32. Singh, A., Gerstle, K. H., and Tulin, L. G., "The Behavior of Reinforcing Steel Under Reversed Loading," Materials Research and Standards, Vol. 5, No. 1, January 1965, pp. 12-17.
- B33. Sinha, B. P., Gerstle, K. H., and Tulin, L. G., "Stress-Strain Relations for Concrete Under Cyclic Loading," Journal ACI - Proceedings, Vol. 61, No. 2, February 1964, pp. 195-211.
- B34. U. S. Army Corps of Engineers, "Design of Structures to Resist the Effects of Atomic Weapons: Strength of Materials and Structural Elements," Manual: EM 1110-345-414, March 15, 1957.
- B35. Watstein, D. and Mathey, R. G., "Strains in Beams Having Diagonal Cracks," Journal ACI, Vol. 55, No. 6, December 1958, pp. 717-728.
- B36. Weiss, V., "Crack Development in Concrete with Closely Spaced Reinforcement and in Similar Materials," Cement and Concrete Research, Vol. 3, No. 2, March 1973, pp. 189-205.

- B37. Zsutty, T. C., "Beam Shear Strength Prediction by Analysis of Existing Data," Journal ACI, Vol. 65, No. 11, November 1968, pp. 943-951.
- B38. Zsutty, T. C., "Shear Strength Prediction for Separate Categories of Simple Beam Tests," Journal ACI, Vol. 68, No. 2, February 1971, pp. 138-143.

NOTATION

b	=	gross cross section width
d	=	effective depth of longitudinal reinforcing bars
h	=	total depth of cross section
s	=	spacing of web reinforcing bars
l	=	length of shear span for checking diagonal cracking failure
a	=	shear span measured from zero moment to a concentrated load
D	=	reinforcing bar diameter
k	=	radius of gyration of reinforcing bar
x_{ci}	=	distance to diagonal crack intersection with tension steel
x_{cs}	=	distance to critical section from minimum moment
A_s	=	area of reinforcing bars as a group
A_b	=	area of a single reinforcing bar
A_v	=	$A_b \times$ number of legs = effective area of web reinforcement bars (Closed stirrups: $A_v = 2 \times A_b$)
p	=	A_s/bd = Longitudinal steel percentage
r	=	A_v/b_s = dimensionless measure of web reinforcement area
n	=	d/s = number of bars crossing a crack (at 45°)
ϵ_{20u}	=	unconfined concrete strain at $0.20 f'_c$ beyond the ultimate strain
ϵ_{50u}	=	unconfined concrete strain at $0.50 f'_c$ beyond the ultimate strain
ϵ_{f1}	=	strain in concrete at crushing in compression
ϵ_{f1}^*	=	strain in concrete at crushing with modification coefficient

- ϵ_c = strain in concrete in compression
- ϵ_{f2} = strain in longitudinal steel at fracture in tension
- ϵ_s = strain in longitudinal steel in tension
- ϵ_v = strain in web reinforcing bar

- f'_c = ultimate cylinder strength of concrete
- $\sqrt{f'_c}$ = a measure of the tensile strength of concrete
- f_s = stress in longitudinal reinforcing bar
- f_{cr} = compressive stress in longitudinal reinforcing bar at critical condition
- f_v = stress in web reinforcing bar
- f_{vy} = stress in web reinforcing bar at yield in tension

- v = V/bd = nominal measure of shear stress
- v_c = V_c/bd = nominal measure of cracking shear stress without axial force
- v_{cn} = V_{cn}/bd = nominal measure of cracking shear stress with axial force (tension or compression)

- E_t = tangent modulus for steel stress-strain response
- $V(x)$ = V = shear force at section x
- $V_c(x)$ = V_c = cracking shear force at section x without axial force
- $V_{cn}(x)$ = V_{cn} = cracking shear force at section x with axial force
- N = axial force in an element (tension or compression)

- P = measure of applied load
- P_c = measure of applied load at diagonal cracking

$M(x)$ = M = bending moment at section x

$F(x)$ = $V(x)/bd\sqrt{f'_c}$

$F_1(x)$ = $V_c(x)/bd\sqrt{f'_c}$

$F_2(x)$ = $1000. \frac{pd}{\sqrt{f'_c}} \left| \frac{V(x)}{M(x)} \right|$

$F_3(x)$ = $V_{cn}(x)/bd\sqrt{f'_c}$

$F_3^*(x)$ = $V_{cn}(x)/bd\sqrt{f'_c}$ = measure with modification coefficient

F_4 = $N/bd\sqrt{f'_c}$ = nondimensional axial force

C_1, C_2, C_3, C_4, C_5 = modification coefficients (range of values defined with criteria)

α = coefficient for axial force effect on shear-flexure failure

α_t = $0.025(4. - C_4)$

α_c = $0.050(2. + C_4)$

APPENDIX C

BIBLIOGRAPHY

This bibliography contains the results of an extensive literature search. The purpose is to document the important sources of information related to the development of a mathematical model to study the complete behavior of a reinforced concrete skeletal structure up to the state of collapse. The literature associated with the total scope of work is so extensive that only those sources related to the development of the basic model are included.

The organization of the entries is by basic subject division, as shown below.

- C.1 Material Behavior
 - C.1.1 Concrete
 - C.1.2 Bond and Anchorage
 - C.1.3 Reinforcing Steel
- C.2 Element Behavior
 - C.2.1 Model
 - C.2.2 Strength Properties
- C.3 System Behavior
- C.4 Solution Process
- C.5 Selected Books

C.1 MATERIAL BEHAVIOR

C.1.1 CONCRETE

1. Akroyd, T. N. W., "Concrete Under Triaxial Stress", Magazine of Concrete Research, Vol. 13, No. 39, November 1961, pp. 111-118.
2. Abrams, D. A., "Effect of Rate of Application of Load on the Compressive Strength of Concrete", Proc. ASTM, Philadelphia, Vol. 17, Part II, 1917.
3. Atchley, B. L. and Furr, H. L., "Strength and Energy Absorption Capability of Plain Concrete Under Dynamic and Static Loadings", Journ ACI, Vol. 64, No. 11, Nov. 1967, pp. 745-756.
4. Baker, A. L. L., "An Analysis of Deformation and Failure Characteristics of Concrete", Magazine of Concrete Research, Vol. 11, No. 33, November 1959, pp. 119-128.
5. Balmer, G., "Shearing Strength of Concrete Under High Triaxial Stress - Computations of Mohr's Envelope as a Curve", U. S. Bureau of Reclamation, Structural Research Lab Report No. SP - 23, October 1949.
6. Barnard, P. R., "Researches into the Complete Stress-Strain Curve for Concrete", Magazine of Concrete Research, Vol. 16, No. 49, December 1964, pp. 203-210.
7. Ballamy, C. J., "Strength of Concrete Under Combined Stresses", Journ. ACI, Vol. 58, No. 4, October 1961, pp. 367-382.
8. Bhadra, P., "Experimental and Theoretical Methods for Determining the Response of Ratesensitive Materials and Complex Structures Undergoing Large Deformations Because of Dynamic Loading", Ph. D. Thesis, Catholic Univ. of America, Washington, D. C.
9. Blackman, J. S., Smith, G. M., and Young, L. E., "Stress Distribution Affects Ultimate Tensile Strength", Journ. ACI, Vol. 55, No. 6, Dec. 1958, pp. 679-684.
10. Blanks, R. F. and McHenry, D., "Plastic Flow of Concrete Relieves High-Load Stress Concentrations", Civil Engineering, Vol. 19, No. 5, May 1949, pp. 320-322.
11. Brebbia, C. A. and Frederick, C. O., "A Failure Surface for Concrete", Cen. Elec. Res. Lab., Note RD/L/N9/69, 1969, pp. 1-13.
12. Bresler, B. and Bertero, V. V., "Reinforced Concrete Prism Under Repeated Loads", RILEM, International Symposium on the Effects of Repeated Loading of Materials and Structural Elements, Mexico City, 15-17 September 1966.

13. Bresler, B. and Bertero, V. V., "Behavior of Reinforced Concrete Under Repeated Load", Journ. Struct. Div., ASCE, Vol. 94, ST 6, June 1968, pp. 1567 - 1590.
14. Bresler, B. and Pister, K. S., "Failure of Plain Concrete Under Combined Stresses", Transactions ASCE, Vol. 122, 1957, pp. 1049-1059 (Discussions pp. 1060-1068).
15. Bresler, B. and Pister, K. S., "Strength of Concrete Under Combined Stresses", Journ. ACI, Vol. 55, No. 3, Sept. 1958, pp. 321-345.
16. Brown, C. B., "The Effect of Aggregate Content on the Properties of Concrete", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM, the Concrete Society, pp. 1015-1019 (ed.) Te'eni, M.
17. Buyukozturk, O., Nilson, A. H., and Slate, F. O., "Stress-Strain Response and Fracture of a Concrete Model in Biaxial Loading", Journ. ACI, Vol. 68, No. 8, Aug. 1971, pp. 590-599.
18. Campbell-Allen, D., "Strength of Concrete under Combined Stresses", Construction Review, Vol. 35, 1962, pp. 29-37.
19. Chen, W. F., "Extensibility of Concrete and Theorems of Limit Analysis", Journ. EM Div., ASCE, Vol. 96, EM3, June 1970, pp. 341-352.
20. Chinn, J. and Zimmerman, R. M., "Behavior of Plain Concrete Under Various Triaxial Compression Loading Conditions", Air Force Weapons Lab, Kirtland AFB, Tech. Report N. WL TR 64-163, August 1965.
21. Clark, L. E., "The Effect of a Strain Gradient on the Stress-Strain Relation of Concrete", Ph.D. Thesis, Univ. of Colorado, 1966.
22. Clark, L. E., Gerstle, K. H., and Tulin, L. G., "Effect of Strain Gradient on the Stress-Strain Curve of Mortar and Concrete", Journ. ACI, Vol. 64, No. 9, Sept. 1967, pp. 580-586.
23. Coon, M. D., and Evans, R. J., "Incremental Constitutive Laws and Their Associated Failure Criteria with Application to Plain Concrete", Int. Journ. of Solids and Structures, Vol. 8, No. 9, September 1972, pp. 1169-1183.
24. Cole, D. G. and Spooner, D. C., "The Damping Capacity of Concrete", Proc. Int. Conference on the Structure of Concrete, London, Sept. 1965, pp. 217-225 (ed.) Brooks, A. E. and Newman, K.
25. Cowan, H. J., "Strength of Reinforced Concrete Under the Action of Combined Stresses, and the Representation of the Criterion of Failure by a Space Model", Nature, Vol. 169, ND. 4303, April 19, 1952, p. 663.

26. Cowan, H. J. "The Strength of Plain, Reinforced and Prestressed Concrete Under the Action of Combined Stresses, with Particular Reference to the Combined Bending and Torsion of Rectangular Sections", Magazine of Concrete Research, Vol. 5, No. 14, Dec 1953, pp. 75-86.
27. Cowell, W. L., "Dynamic Properties of Plain Portland Cement Concrete", Naval Civil Engineering Laboratory, Port Hueneme, Calif., Tech. Report R447, June 1966, 46pp.
28. Dantu, P. "Study of the Stresses in Heterogeneous Materials and Its Application to Concrete", Annales de L'Institut Technique du Batiment et des Travaux Publics, Vol. 11, Serie: Essais et mesures (40), No. 121, January 1958, pp. 54-77.
29. Desayi, P., "A Model to Simulate the Strength and Deformation of Concrete in Compression", RILEM Bulletin - Materials and Structures, Vol. 1, 1968, pp. 49-56.
30. Desayi, P. and Viswanatha, C. S., "True Ultimate Strength of Plain Concrete", RILEM Bulletin No. 36, 1967, pp. 163-173.
31. Erntroy, H. C., "The Relationship between the Bending Strength of Reinforced Concrete Beams and the Concrete Cube Strength", Proc. of a Symposium on Concrete Quality, London, November 1964, Cement and Concrete Assoc., with others, pp. 89-119 (ed.) R. P. Andrew.
32. Evans, R. H., "Extensibility and Modulus of Rupture of Concrete", The Structural Engineer, Vol. 24, 1946, pp. 636-659.
33. Freudenthal, A. M., "The Inelastic Behavior and Failure of Concrete", Proc. First U. S. National Congress of Applied Mechanics, 1951, pp. 641-646.
34. Gardner, N. J., "Triaxial Behavior of Concrete", Journ. ACI, Vol. 66, No. 2, Feb. 1969, pp. 136-146.
35. Glucklich, J., and Cohen, L. J. "Strain Energy and Size Effects in a Brittle Material", Materials Research and Standards, Vol. 8, No. 10, Oct. 1968, pp. 17-22.
36. Goldsmith, W., Kenner, V. H. and Ricketts, T. E., "Dynamic Loading of Several Concrete-Like Mixtures", Journ. Struct. Div., ASCE, Vol. 94, St7, July 1968, pp. 1803-1827.
37. Goldsmith, W., Polivka, M., and Yang, T., "Dynamic Behavior of Concrete", Experimental Mechanics, Vol. 6, No. 2, 1966, p. 65-79.
38. Goode, C. D. and Helmy, M. A., "The Strength of Concrete Under Combined Shear and Direct Stress", Magazine of Concrete Research, Vol. 19,

No. 59, June 1967, pp. 105-112.

39. Grimer, F. J. and Hewitt, R. E., "The Form of the Stress-Strain Curve of Concrete Interpretted with a Diphase Concept of Material Behavior", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM, and the Concrete Society, pp. 681-692 (ed.) Te'eni, M.
40. Hammer, J. G. and Dill, A. F., "Strength of Materials Under Dynamic Loadings", Dept. of the Navy, Bureau of Yards and Docks, NAVDOCKS p. 290, Studies in Atomic Defense Engineering, Washington, D. C., June 1962, pp. 51-55.
41. Hannant, D. T. and Frederick, C. O., "Failure Criteria for Concrete in Compression", Magazine of Concrete Research, Vol. 20, No. 64, September 1968, pp. 137-144.
42. Hatano, T., "Theory of Failure of Concrete and Similar Brittle Solid on the Basis of Strain", Int. Journ of Fracture Mechanics, Vol. 5, No. 1, March 1969, p. 73-79.
43. Heifitz, J. H. and Constantino, C. T., "Dynamic Response of Nonlinear Media to Large Strains", Journ. EM Div., ASCE, Vol. 98, EM6, Dec. 1972, pp. 1511-1528.
44. Hellesland, J. and Green, R., "A Stress and Time Dependent Strength Law for Concrete", Cement and Concrete Research, Vol. 2, No. 3, May 1972, pp. 261-275.
45. Hilsdorf, H. K., Kesler, C. E., "The Behavior of Concrete in Flexure Under Varying Repeated Loads", Univ. of Illinois, Theoretical and Applied Mechanics, Report No. 172, 1960.
46. Hobbs, D. W., "Strength of Concrete Under Combined Stress", Cement and Concrete Research, Vol. 1, No. 1, Jan. 1971, p. 41-56.
47. Hobbs, D. W., "Strength and Deformation Properties of Plain Concrete Subject to Combined Stress", Cement and Concrete Assoc. Technical Reports, Part 1.-Strength Results Obtained on One Concrete, Report No. 42.451, Part 2.-Strength in Multiaxial Compression, Report No. 42.463.
48. Hofbeck, J. F., Ibrahim, I. O., and Mattock, A. H., "Shear Transfer in Reinforced Concrete", Journ. ACI, Vol. 66, No. 2, Feb. 1969, pp. 119-128.
49. Hruban, I. and Vitek, B., "Failure Theory of Concrete-Biaxial State of Stress", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton,

- RILEM, and the Concrete Society, pp. 1053-1060 (ed.) Te'eni, M.
50. Hsu, T. T., Slate, F. O. Sturman, G. M. and Winter, G., "Micro-cracking of Plain Concrete and the Shape of the Stress-Strain Curve," Journ. ACI, Vol. 60, No. 2, Feb. 1963, pp. 209-224.
 51. Iosipescu, N., and Negoita, A., "A new Method for Determining the Pure Shearing Strength of Concrete," Concrete Vol. 3, No. 2, Feb. 1969, p. 63.
 52. Isenberg, J., "Inelasticity and Fracture in Concrete", Ph.D. Thesis, Univ. of Cambridge, 1966.
 53. Iyengar, K. T. S. R., Chandrashekhara, K. and Krishnaswamy, K. T., "Strength of Concrete Under Biaxial Compression", Journ. ACI, Vol. 62, No. 2, Feb. 1965, pp. 239-249.
 54. Johnson, R. P. and Lowe, P. G., "Behavior of Concrete under Biaxial and Triaxial Stress", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM, and the Concrete Society, pp. 1039-1051 (ed.) Te'eni, M.
 55. Jones, R. and Kaplan, M. F., "The Effect of Coarse Aggregate on the Mode of Failure of Concrete in Compression and Flexure", Mag. of Conc. Research, Vol. 9, No. 26, Aug. 1957, pp. 89-94.
 56. Kalousek, G. L. and Kopanda, J. E., "Approach to Fundamentals of Concrete Strength," Cement and Concrete Research, Vol. 1, No. 1, Jan. 1971, pp. 63-73.
 57. Kaplan, M. F., "Flexure and Compressive Strength of Concrete as Affected by the Properties of Coarse Aggregate", Journ. ACI, Vol. 55, No. 11, May 1959, pp. 1193-1208.
 58. Karsan, I. D., "Behavior of Plain Concrete Under Variable Load Histories", Ph.D. Thesis, Rice Univ., Houston, Texas, 1968.
 59. Karsan, I. D., "Behavior of Concrete Under Varying Strain Gradients", Journ. of Struct. Div., ASCE, Vol. 96, ST. 8, August. 1970, pp. 1675-1696.
 60. Karsan, I. D., and Jirsa, J. D., "Behavior of Concrete Under Compressive Loadings", Journ of Struct. Div., ASCE, Vol. 95, ST 12, Dec. 1969, pp. 2543-2563.
 61. Krishnaswamy, K. T., "Strength and Microcracking of Plain Concrete Under Triaxial Compression", Journ. ACI, Vol. 65, No. 10, Oct. 1968, pp. 856-862.

62. Kupfer, H. B. and Gerstle, K. H., "Behavior of Concrete Under Biaxial Stresses", Journ. EM Div., ASCE, Vol. 99, EM4, Aug. 1973, pp. 853-866.
63. Kupfer, H. B., Hilsdorf, H. K. and Rusch, H., "Behavior of Concrete Under Biaxial Stresses", Journ. ACI, Vol. 66, No. 8, Aug. 1969, pp. 656-666.
64. Langan, D. and Garas, F. K., "The Failure of Concrete Under the Combined Action of High Shearing Forces and Biaxial Restraint", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM, and the Concrete Society, pp. 1061-1088.
65. Lewis, D. J. and Carmichael, G. D. T., "Multiaxial Failure Diagram for Concrete", Civil Eng'g and Public Works Review, Vol. 65, No. 765, April 1970, p. 389-394.
66. Liebenberg, A. C., "A Stress-Strain Function for Concrete Subjected to Short Term Loading", Magazine of Concrete Research, Vol. 14, No. 41, July 1962, pp. 85-90.
67. Liu, T. C. Y., Nilson, A. H. and Slate, F. O., "Stress-Strain Response and Fracture of Concrete in Uniaxial and Biaxial Compression", Journ. ACI, Vol. 69, No. 5, May 1972, pp. 291-295.
68. Liu, T. C. Y., Nilson, A. H., and Slate, F. O., "Biaxial Stress-Strain Relations For Concrete", Journ. of Struct. Div., ASCE, Vol 98, ST5, May 1972, pp. 1025-1034.
69. Lundeen, R. L., "Dynamic and Static Tests of Plain Concrete Specimens", Army Engineer Waterways Experiment Station, Misc. Paper No. 6-609, Vicksburg, Mississippi, Nov. 1963.
70. Marin, J., "Failure Theories of Materials Subjected to Combined Stresses", Transactions ASCE, Vol. 100, 1935, pp. 1162-1178.
71. Maslov, B. P., "Nonlinear Elastic Properties of Stochastically Inhomogeneous Media", (in Russian), Prikladnaia Mekhamika, Vol. 9, Aug. 1973, pp. 91-95.
72. Mattock, A. H. and Hawkins, N. M., "Shear Transfer in Reinforced Concrete-Recent Research", Journ. PCI, Vol. 17, No. 2, Mar/April 1972, pp. 55-75.
73. McCreath, D. R., Newman, J. B., and Newman, K., "The Influence of Aggregate Particles on the Local Strain Distribution and Fracture Mechanism of Cement Paste During Shrinkage and Loading to Failure", Reunion Internationale des Laboratoires d'Essais et de Recherches sur les Matériaux et les Constructions, No. 7, Jan.-Feb. 1969, pp. 73-84.

74. McHenry, D. and Karni, J., "Strength of Concrete Under Combined Tensile and Compressive Stresses", Journ. ACI, Vol. 54, No. 10, April 1958, pp. 829-840.
75. Mills, L. L. and Zimmerman, R. M., "Compressive Strength of Plain Concrete Under Multiaxial Loading Conditions", Journ. ACI, Vol. 67, No. 10, Oct. 1970, pp. 802-807,
76. Neville, A. M., "Some Aspects of the Strength of Concrete", Civil Engineering and Public Works Review, Part 1-Vol. 54, No. 639, Oct. 1959, pp. 1153-1156, Part 2-Vol. 54, No. 640, Nov. 1959, pp. 1308-1310, Part 3-Vol. 54, No. 641, Dec. 1959, pp. 1435-1438.
77. Newman, K., "The Structure and Engineering Properties of Concrete", Proc. Int. Symposium Theory of Arch Dams, Southampton Univ., April 1964, (ed.) Rydzewski, J. R., pp. 683-712.
78. Newman, K., "The Structure and Properties of Concrete-An Introductory Review", Proc. Int. Conference: The Structure of Concrete and Its Behavior Under Load", Cement and Concrete Association, London, Sept. 1965, (ed.) Brooks, A. E. and Newman, K., pp. xiii-xxiii.
79. Newman, K., "Criteria for the Behavior of Plain Concrete Under Complex States of Stress", Proc. Int. Conference: The Structure of Concrete and Its Behavior Under Load, Sept. 1965, Cement and Concrete Assoc., London, pp. 255-274, (eds.) Brooks, A. E. and Newman, K.
80. Newman, K., "Concrete Systems", Chapter VIII, pp. 336-452, Composite Materials, (eds.) Holliday, L., Elsevier Publishing Co., 1966.
81. Newman, K. and Vile, G. W. D., "Strength of Concrete Under Combined States of Stress", Civil Engineering Research Assoc., London, Research Report RR8, 1967, pp. 1-21.
82. Newman, K. and Newman, J. B., "Failure Theories and Design Criteria for Plain Concrete", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM, and the Concrete Society, (eds.) Te'eni, M., pp. 963-995.
83. Nielsen, K. E. G., "Internal Stresses in Concrete", RILEM Bulletin No. 1, 1959, pp. 11-20.
84. Nishizawa, N., "Strength of Concrete Under Combined Tensile and Compressive Loads", Japan Cement Engineering Assoc., Review of 15th General Meeting, Tokyo, 1961, pp. 126-131.
85. Palaniswamy, R. and Shah, S. P., "Fracture and Stress-Strain Relationship for Concrete Under Triaxial Compression", Journ. Struct. Div. ASCE, Vol. 100, ST5, May 1974, pp. 901-916.

86. Paul, B., "A Modification of the Coulomb-Mohr Theory of Fracture", Journ. of Applied Mech., ASME, Vol. 28, No. 2, June 1961, pp. 259-268.
87. Pomeroy, C. D., "Systematic Research on Plain Concrete at the Cement and Concrete Association", Journ. ACI, Vol. 70, No. 2, Feb. 1973, pp. 127-131.
88. Popovics, S., "Fracture Mechanism in Concrete: How Much Do We Know?", Journ. EM Div., ASCE, Vol. 95, EM3, June 1969, pp. 531-544.
89. Popovics, S., "A Review of Stress-Strain Relationships for Concrete", Journ. ACI, Vol. 67, No. 3, March 1970, pp. 243-248.
90. Popovics, S. "A Numerical Approach to the Complete Stress-Strain Curve of Concrete", Cement and Concrete Research, Vol. 3, No. 5, Sept. 1973, pp. 583-599.
91. Price, W. H., "Factors Influencing Concrete Strength", Journ. ACI, Vol. 47, No. 6, Feb. 1951, pp. 417-432.
92. Probst, E., "The Influence of Rapidly Alternating Loading on Concrete and Reinforced Concrete", The Structural Engineer, Vol. 9, Dec. 1931, pp. 410-432.
93. Raithby, K. D., "Failure of Concrete Under Repeated Loading", Concrete, Vol. 4, No. 10, Oct. 1970, p. 403.
94. Ramaley, D. and McHenry, D., "Stress-Strain Curves for Concrete Strained Beyond the Ultimate Load", U. S. Bureau of Reclamation, Engineering and Geological Control and Research Division, Denver, Lab Report No. SP-12, March 7, 1947, 23pp.
95. Rasch, C., "Stress-Strain Diagrams of Concrete Obtained by Constant Rates of Strain", RILEM Symposium on the Influence of Time on the Strength and Deformation of Concrete, Munich, 1958.
96. Reinius, E., "A Theory of the Deformation and Failure of Concrete", Cement and Concrete Association, Library Translation Cj63, 1957, (from Betong Vol. 40, No. 1, 1955, pp. 15-43), (also Magazine of Concrete Research, Nov. 1956, pp. 157-160).
97. Richart, F. E., Brandtzaeg, A., and Brown, R. L., "A Study of the Failure of Concrete Under Combined Compressive Stresses", University of Illinois - Engineering Experimental Station, Bulletin, No. 185, 1928, 104 p.
98. Richart, F. E., Brandtzaeg, A., and Brown, R. L., "The Failure of Plain and Spirally Reinforced Concrete in Compression", University of Illinois - Engineering Experiment Station, Bulletin, No. 190, April 1929, 72 p.

99. Robinson, G. S., "The Failure Mechanism of Concrete with Particular Reference to the Biaxial Compressive Strength", Ph.D. Thesis, Univ. of London, 1964.
100. Robinson, G. S., "The Influence of Microcracking and State of Stress on the Elastic Behavior and Discontinuity of Concrete", Proc. of Int. Sympos. of the Theory of Arch Dams, Southampton, April 1964, pp. 683-712, (ed.) Rydzewski, J. R.
101. Robinson, G. S., "Behavior of Concrete in Biaxial Compression", Journ. Struct. Div., ASCE, Vol. 93, ST1, Feb. 1967, pp. 71-86.
102. Rosenthal, I. and Glucklich, J., "Strength of Plain Concrete Under Biaxial Stress", Journ. ACI, Vol. 67, No. 11, Nov. 1970, pp. 903-914.
103. Rusch, H., "Researches Towards a General Flexural Theory for Structural Concrete", Journ. ACI, Vol. 57, No. 1, July 1960, pp. 1-28.
104. Rusch, H. and Stockl, S., "Characteristics of Rectangular Concrete Compression Zone Under Short Time Loading", Deutscher Ausschuss Fur Stahlbeton, Berlin, Bulletin No. 196, 1967, pp. 29-66.
105. Sargin, M., "A General Stress-Strain Relation and the Applications to Structural Concrete", Ph.D. Dissertation, Univ. of Waterloo, Waterloo, Ontario.
106. Sargin, M., "Stress-Strain Relationships for Concrete and the Analysis of Structural Concrete Sections", University of Waterloo, Solid Mechanics Div., Ontario, Canada, Study, No. 4, 1971, 167 p.
107. Shah, S. P. and Chandra, S., "Fracture of Concrete Subjected to Cyclic and Sustained Loading", Journ. ACI, Vol. 67, No. 10, Oct. 1970, pp. 816-825.
108. Shah, S. P. and Winter, G., "Response of Concrete to Repeated Loading", RILEM, International Symposium on the Effects of Repeated Loading of Materials and Structural Elements, Mexico City, 15-17 September 1966.
109. Shah, S. P. and Winter, G., "Inelastic Behavior and Fracture of Concrete", Causes, Mechanisms and Control of Cracking in Concrete, ACI, SP-20, 1968, pp. 5-28, (also Journ. ACI, Vol. 63, No. 9, Sept. 1966, pp. 925-93.).
110. Sinha, B. P., "The Inelastic Behavior of Plain and Reinforced Concrete Under Cyclic Loading", Ph.D. Thesis, Univ. of Colorado, 1962.
111. Sinha, B. P., Gerstle, K. H., and Tulin, L. G., "Stress-Strain Relations for Concrete Under Cyclic Loading", Journ. ACI - Proceedings, Vol. 61, No. 2, Feb. 1964, pp. 195-211.

112. Smith, R. G., "The Determination of the Compressive Stress-Strain Properties of Concrete in Flexure", Magazine of Concrete Research, Vol. 12, No. 36, Nov. 1960, pp. 165-170.
113. Smith, R. G. and Orangun, C. O., "Evaluation of the Stress-Strain Curve of Concrete in Flexure Using Method of Least Squares", Journ. ACI, Vol. 66, No. 7, July 1969, pp. 553-559.
114. Soliman, M. T. M. and Yu, C. W., "The Flexural Stress-Strain Relationship of Concrete Confined by Rectangular Transverse Reinforcement", Magazine of Concrete Research, Vol. 19, No. 61, Dec. 1967, pp. 223-238.
115. Somes, N. F., "Compression Tests on Hoop-Reinforced Concrete", Journ. of Struct. Div., ASCE, Vol. 96, ST. 7, July 1970, pp. 1495-1509.
116. Sparks, P. R. and Menzies, J. B., "The Effect of Rate of Loading upon the Static and Fatigue Strengths of Plain Concrete in Compression", Magazine of Concrete Research, Vol. 25, No. 83, June 1973, pp. 73-80.
117. Spooner, D. C., "Stress-Strain-Time Relationships for Concrete", Magazine of Concrete Research, Vol. 23, No. 75-76, June-Sept. 1971, pp. 127-131.
118. Spooner, D. C. and Pomeroy, C. D., "Energy Dissipation Processes in the Compression of Cement Paste and Concrete", Cement and Concrete Research, Vol. 3, No. 4, July 1973, pp. 481-486.
119. Sturman, G. M., "Microcracking and the Structural Behavior of Plain Concrete", Ph.D. Thesis, Cornell Univ., Sept. 1963.
120. Sturman, G. M., Shah, S. P., and Winter, G., "Microcracking and Inelastic Behavior of Concrete", Proc. Int. Symposium on Flexural Mechanics of Reinforced Concrete, Miami, Florida, Nov. 10-12, 1964, ASCE-ACI, publ. SP-12 (1965), pp. 473-493.
121. Sturman, G. M., Shah, S. P., and Winter, G., "Effect of Flexural Strain Gradients on Microcracking and Stress-Strain Behavior of Concrete", Journ. ACI, Vol. 62, No. 7, July 1965, pp. 805-822.
122. Sundara Raja Iyengar, K. T., Chandrashekhara, K., and Krishnaswamy, K. T., "Strength of Concrete under Biaxial Compression", Journ. ACI, Vol. 62, No. 2, Feb. 1965, pp. 239-250.
123. Sundra Raja Iyengar, K. T., Desayi, P., and Reddy, K. N., "Stress-Strain Characteristics of Concrete Confined in Steel Binders", Magazine of Concrete Research (London), Vol. 22, No. 72, Sept. 1970, pp. 173-184.

124. Szulczynski, T. and Sozen, M. A., "Load-Deformation Characteristics of Concrete Prisms with Rectilinear Transverse Reinforcement", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 224, Sept. 1961.
125. Taylor, M. A., "General Behavior Theory for Cement Pastes, Mortars, and Concretes", Journ. ACI, Vol. 68, No. 10, Oct. 1971, pp. 756-762.
126. Tso, W. K. and Zelman, I. M., "Concrete Strength Variation in Actual Structures", Journ. ACI, Vol. 67, No. 12, Dec. 1970, pp. 981-988.
127. Tsuboi, Y. and Suenaga, Y., "Experimental Study on Failure of Plain Concrete Under Combined Stresses", Transactions Architectural Inst. of Japan, No. 64, 1960, pp. 25-36.
128. U. S. Army Corps of Engineers, Engineering and Design - Design of Structures to Resist the Effects of Atomic Weapons: Strength of Materials and Structural Elements, Manual: EM 1110-345-414, March 15, 1957.
129. Vile, G. W. D., "The Strength of Concrete Under Short-term Static Bi-axial Stress", Proc. Int. Conference - The Structure of Concrete and Its Behavior Under Load, Sept. 1965, Cement and Concrete Assoc., London, pp. 275-288, (ed.) Brooks, A. E. and Newman, K.
130. Wastlund, G., "New Evidence Regarding the Basic Strength Properties of Concrete", Betong, No. 3, 1937, pp. 189-205.
131. Watstein, D. and Boresi, A. P. "The Effect of Loading Rate on the Compressive Strength and Elastic Properties of Plain Concrete", National Bureau of Standards, Washington, D. C., Report No. 1523, March 1952.
132. Watstein, D., "Effect of Straining Rate on the Compressive and Elastic Properties of Concrete", Journ. ACI, Vol. 49, No. 8, April 1953, pp. 729-744.
133. Zaitsev, Y. V., "Deformation and Failure of Hardened Cement Paste and Concrete Subjected to Short Term Load", (in Russian), Cement and Concrete Research, Vol. 1, No. 1, Jan, 1971, pp. 123-137.
134. Zaitsev, Y. V., "Deformation and Failure of Hardened Cement Paste and Concrete Under Sustained Load", (in Russian), Cement and Concrete Research, Vol. 1, No. 3, May 1971, pp. 329-344.
135. Zienkiewicz, C. O., Valliappan, S., and King, I. P., "Stress Analysis of Rock as No Tension Material", Geotechnique, Vol. 18, No. 1, Mar. 1968, pp. 56-66.

C.1.2 BOND AND ANCHORAGE

1. ACI Committee 408, "Bond Stress - The State of the Art", Journ. ACI, Vol. 63, No. 11, Nov. 1966, pp. 1161-1188.
2. Brown, C. B., "Bond Failure Between Steel and Concrete", Journ. of Franklin Institute, Vol. 282, No. 5, Nov. 1966, pp. 271-290.
3. Evans, R. H., "Influence of Shear Cracks on the Bond Slip in Reinforced Concrete Beams", The Structural Engineer, Vol. 19, July 1941, pp. 119-125.
4. Garai, T., "Investigations of Anchorage of Reinforcement in Concrete", Studies of Strength of Elements of Reinforced Concrete Structures, Moscow, Issue 5, NIIBZHB, 1959.
5. Gilkey, H. J., Chamberlain, S. I., and Beal, R. W., "Bond Between Concrete and Steel", Iowa Eng'g. Experiment Station, Eng'g. Report No. 26, 1956.
6. Glanville, W. H., "Studies in Reinforced Concrete: 1 Bond Resistance", Dept. of Scientific and Industrial Research, England, Building Research Tech. Paper No. 10, 1930.
7. Hribar, J. A. and Vasko, R. C., "End Anchorage of High Strength Steel Reinforcing Bars", Journ. ACI, Vol. 66, No. 11, Nov. 1969, pp. 875-883.
8. Ismail, M. A. F., "Bond Deterioration in Reinforced Concrete Under Cyclic Loading", Ph.D. Dissertation, Rice University, Houston, Dept. of Civil Engineering, Feb. 1970.
9. Ismail, M. A. F., and Jirsa, J. O., "Bond Deterioration in Reinforced Concrete Subject to Low Cycle Loads", Journ. ACI, Vol. 69, No. 6, June, 1972, pp. 334-343.
10. Lutz, L. A., "The Mechanism of Bond and Slip of Deformed Reinforcing Bars in Concrete", Dept of Structural Engineering, Cornell Univ., Report No. 324, 1966.
11. Lutz, L. A., "Analysis of Stresses in Concrete Near a Reinforcing Bar due to Bond and Transverse Cracking", Journ. ACI, Vol. 67, No. 10, Oct. 1970, pp. 778-787.
12. Lutz, L. A., "Information on the Bond of Deformed Bars from Special Pullout Tests", Journ. ACI, Vol. 67, No. 11, Nov. 1970, pp. 885-887.
13. Lutz, L. A. and Gergely, P., "Mechanics of Bond and Slip of Deformed Bars in Concrete", Journ. ACI, Vol. 64, No. 11, Nov. 1967, pp. 711-721.

14. Mains, R. M., "Measurement of the Distribution of Tensile and Bond Stresses along Reinforcing Bars", Proceedings - ACI, Vol. 48, No. 3, Nov. 1951, pp. 225-252.
15. Mizuno, T., and Watanabe, A., "Studies on the Distribution of Bond Stresses along Various Reinforcing Bars", Memoirs of the Faculty of Eng'g., Kyushu Univ., Vol. 25, No. 3, 1966, Fukuoka, Japan.
16. Nilson, A. H., "Internal Measurement of Bond Slip", Journ. ACI, Vol. 69, No. 7, July 1972, pp. 439-441.
17. Perry, E. S. and Jundi, N., "Pullout Bond Stress Distribution Under Static and Dynamic Repeated Loadings", Journ. ACI, Vol. 66, No. 5, May 1969, pp. 377-380.
18. Rehm, G., "Concerning the Fundamentals of Bond Between Steel and Concrete", Deutscher Ausschuss fur Stahlbeton, Bulletin 138, Berlin, 1961.
19. Venkateswarlu, B., "Bond Slip and Cracking in Reinforced Concrete Beams", Ph.D. Thesis, University of Kentucky, Lexington, 1970.
20. Venkateswarlu, B. and Gesund, H., "Cracking and Bond Slip in Concrete Beams", Journ. of Struct. Div., ASCE, Vol. 98, ST. 12, Dec. 1972, pp. 2663-2685.
21. Watstein, D. and Mathey, R. G., "Investigation of Bond in Beam and Pull-out Specimens with High Yield Strength Deformed Bars", Journ. ACI, Vol. 57, No. 9, March 1961, pp. 1071-1090.

C.1.3 REINFORCING STEEL

1. ACI Committee 439, "Uses and Limitations of High Strength Steel Reinforcement", $f_y \geq 60 \text{ ksi } (42.2 \text{ kgf/mm}^2)$, Journ. ACI, Vol. 70, No. 2, Feb. 1973, pp. 77-104.
2. Allen, D. E., "Statistical Study of the Mechanical Properties of Reinforcing Bars", Ottawa, Division of Building Research, National Research Council, Building Research Note No. 85, 1972.
3. ASTM Designation A615-72, Standard Specification for Deformed Billet-Steel Bars for Concrete Reinforcement, 1973 Annual ASTM Standards, Philadelphia, Part 4.
4. Bannister, J. L., "Steel Reinforcement and Tendons for Structural Concrete" (PART I), Concrete, Vol. 2, No. 7, July 1968, pp. 295-306.

5. Brown, A. F. C. and Edmonds, R., "The Dynamic Yield Strength of Steel at an Intermediate Rate of Loading", Institution of Mechanical Engineers, Vol. 159, 1948, pp. 11-23.
6. Campbell, J. D., "The Dynamic Yielding of Mild Steel", Acta Metallurgica, Vol. 1, 1953, pp. 706-710.
7. Campbell, J. D. and Duby, J., "Delayed Yield and other Dynamic Loading Phenomena in Medium Carbon Steel", Proc. Conf. on Properties of Materials at High Rates of Strain, April 30-May 2, 1957, Institution of Mechanical Engineers, pp. 714-220.
8. Chua, L. O., and Stromsmoe, K. A., "Mathematical Model for Dynamic Hysteresis Loops", Int. Journ. Eng'g Sci., Vol. 9, No. 5, May 1971, pp. 435-450.
9. Cowell, W. L., "Dynamic Tests of Concrete Reinforcing Steels", U. S. Naval Civil Engineering Laboratory, Port Hueneme, Calif., Technical Report R-394, Sept. 1965.
10. Davis, E. A., "The Effect of Speed of Stretching and the Rate of Loading on Yielding of Mild Steel", Journ. of Applied Mechanics, ASME, Vol. 5, No. 4, Dec. 1938, p. A-137.
11. DiGioia, A. M. and Crum, R. G., "Yielding at Varying Load Rates", Journ. EM Div., ASCE, Vol. 88, EM3, June 1962, pp. 45-74.
12. Ditlevsen, O., "Examination of the Stress-Strain Curve of Mild Steel from a Statistical Point of View", Journ. Mech. and Phys. of Solids, Vol. 16, No. 2, March 1968, pp. 111-120.
13. Dubuc, J., "Plastic Fatigue Under Cyclic Stress and Cyclic Strain with a Study of the Bauschinger Effect", Ph.D. Thesis, Dept of Strength of Materials, Univ. of Montreal, Canada, 1961.
14. Fry, L. H., "Speed in Tension Testing and Its Influence on Yield Point Values", Proc. A.S.T.M., Vol. 40, 1940, p. 625.
15. Gamble, W. L., "Some Observations of the Strengths of Large Reinforcing Bars", Journ. ACI, Vol. 70, No. 1, Jan. 1973, pp. 31-35.
16. Goodwill, D. J. and Eastwood, W., "High Strength Reinforcing Steels", Civil Eng'g and Public Works Review, Vol. 65, No. 766, May 1970, p. 493.
17. Hammer, J. G. and Dill, A. F., "Strength of Materials Under Dynamic Loadings", Dept. of the Navy, Bureau of Yards and Docks, NANDOCKS, p. 290, Studies in Atomic Defense Engineering, Wash. D. C., June 1962, pp. 51-55.

18. Hanson, K. D., "Comparison of Static and Dynamic Hysteresis Curves", Journ. EM. Div., SCE, Vol. 92, EM5, Oct. 1966, pp. 87-113.
19. Ismail, M. A. F. and Hirs, J. O., "Behavior of Anchored Bars Under Low Cycle Overloads Producing Inelastic Strains", Journ. ACI, Vol. 69, No. 7, July 1972, pp. 433-438.
20. Manjoine, M. J., "Influence of Rate of Strain and Temperature on Yield Stresses of Mild Steel", Journ of Applied Mechanics, ASME, Vol. 11, No. 4, Dec. 1944, p. A-211-18.
21. Marsh, K. J. and Campbell, J. D., "The Effect of Strain Rate on the Post-Yield Flow of Mild Steel", Journ. Mech. and Phys. of Solids, Vol. 11, No. 1, Jan-Feb. 1963, pp. 49-63.
22. Matveev, V. V., "Description of the Contour of a Mechanical Hysteresis Loop", (in Russian), Problemy Prochnosti, Vol. 5, Aug. 1973, pp. 3-9.
23. Nagaraja Rao, N. R., Lehmann, M., and Tall, L., "Effect of Strain Rate on the Yield Stress of Structural Steels", Journ. of Materials, ASTM, Vol. 1, No.1, Mar. 1966, pp. 241-262.
24. Siess, C. P. "Behavior of High Strength Deformed Reinforcing Bars Under Rapid Loading", Univ. of Illinois, Dept. of Civil Engineering, Report for the Committee of Concrete Reinforcing Bar Producers, American Iron and Steel Institute, Feb. 1962.
25. U. S. Army Corps of Engineers, Engineering and Design - Design of Structures to Resist the Effects of Atomic Weapons: Strength of Materials and Structural Elements, Manual: EM 1110-345-414, March 15, 1957.
26. U. S. Navy David Taylor Model Basin, "Tensile and Compression Test Data for Specimens of Medium Steel", National Bureau of Standards, March 1950.
27. Vigness, I, Krafft, J. M., and Smith, R. C., "Effect of Loading History upon the Yield Strength of a Plain Carbon Steel", Proc. Conf. on Properties of Materials at High Rates of Strain, April 30-May 2, 1957, Institution of Mechanical Engineers, pp. 138-146.
28. Warnock, F. V. and Brennan, J. B., "The Tensile Yield Strength of Certain Mild Steels Under Suddenly Applied Loads", Institution of Mechanical Engineers, Vol. 159, 1948, pp. 1-10.
29. Warnock, F. V. and Taylor, "The Yield Phenomena of a Medium Carbon Steel Under Dynamic Loading," Institution of Mechanical Engineers, Vol. 161, 1949, p. 165.

C.2 ELEMENT BEHAVIOR

C.2.1 MODEL

1. Anderson, G. M., "Timoshenko Beam Dynamics", Journ of Applied Mech., ASME, Vol. 38, No. 3, Sept. 1971, p. 591.
2. Archer, J. S., "Consistent Mass Matrix for Distributed Mass Systems", Journ. Struct. Div., ASCE, Vol. 89, ST.4, Aug. 1963, pp. 161-178.
3. Archer, J. S., "Consistent Matrix Formulation for Structural Analysis Using Finite Element Techniques", AIAA Journ., Vol. 3, No. 10, Oct. 1965, pp. 1910-1918.
4. Archer, J. S. and Samson, C. H., Jr., "Structural Idealization for Digital Computer Analysis", Proc. 2nd Conf. on Electronic Computation, ASCE, Sept. 1960, pp. 283-325.
5. Archer, R. R. and Das, M. L., "A Comparison of Nonlinear Dynamic Beam Theories", Proc. 11th Midwestern Mechanics Conf., Iowa State Univ., Ames., Aug. 18-20, 1969, pp. 407-428.
6. Ashwell, D. G. and Sabir, A. B., "Limitations of Certain Curved Finite Elements When Applied to Arches", Int. Journ. of Mechanical Sciences, Vol. 13, No. 2, Feb. 1971, pp. 133-139.
7. Ashwell, D. G., Sabir, A. B., and Roberts, T. M., "Further Studies in the Application of Curved Finite Elements to Circular Arches", Int. Journ. of Mechanical Sciences, Vol. 13, No. 6, June 1971, pp. 507-517.
8. Baron, F. and Venkatesan, M. S., "Nonlinear Formulation of Beam-Column Effects", Journ. of Struct. Div., ASCE, Vol. 97, ST.4, April 1971, pp. 1305-1340.
9. Bisshopp, K. E. and Drucker, D. C., "Large Deflections of Cantilever Beams", Quarterly of Applied Math., Vol. 3, 1945, pp. 272-275.
10. Blakey, F. A. and Beresford, F. D., "A Note on Strain Distribution in Concrete Beams", Civil Eng'g and Public Works Review, Vol. 50, No. 586, April 1955, pp. 415-416.
11. Boley, B. A. and Chao, C. C., "Some Solutions of the Timoshenko Beam Equations", Journ. Applied Mech., ASME, Vol. 22, Dec. 1955, pp. 579-586.
12. Boley, B. A. and Chao, C. C., "An Approximate Analysis of Timoshenko Beams Under Dynamic Loads", Journ. Applied Mech., ASME, Vol. 25, No. 1, Mar. 1958, pp. 31-36.

13. Broms, B. B., "Stress Distribution in Reinforced Concrete Members with Tension Cracks", Journ. ACI, Vol. 62, No. 9, Sept. 1965, pp. 1095-1108.
14. Burnett, E., "Flexural Rigidity, Curvature, and Rotation and their Significance in Reinforced Concrete Design", Magazine of Concrete Research, Vol. 16, No. 47, June 1964, pp. 67-72.
15. Burnett, E. F. P., "Bending - An Examination of Assumptions", Journ. ACI, Vol. 70, No. 2, Feb. 1973, pp. 105-107.
16. Cheng, F. Y. and Tseng, W., "Dynamic Matrix of Timoshenko Beam Columns", Journ. Struct. Div., ASCE, Vol. 99, ST.3, Mar. 1973, pp. 527-549.
17. Cohen, E. and McCallion, H., "Improved Deformation Functions for the Finite Element Analysis of Beam Systems", Int. Journ. Num. Methods Eng'g, Vol. 1, No. 2, April-June 1969, pp. 163-167.
18. Conway, H. D., "The Large Deflection of Simply Supported Beams", The Philosophic Magazine, Vol. 38, 1947, p. 905.
19. Cowper, G. R., "The Shear Coefficient in Timoshenko's Beam Theory", Journ. of Applied Mech., ASME, Vol. 33, June 1966, pp. 335-340.
20. Cowper, G. R., "On the Accuracy of Timoshenko's Beam Theory", Journ. Em Div., ASCE, Vol. 94, EM6, Dec. 1968, pp. 1447-1453.
21. Davis, R., Henshell, R. D. and Warburton, G. B., "Timoshenko Beam Element", Journ. of Sound and Vibration, Vol. 22, No. 4, June 1972, pp. 475-487.
22. Dawoud, R. H., Hanna, M. M., and Fareed, A., "Flexural Stresses in Rectangular Reinforced Concrete Curved Members", Journ. ACI, Vol. 67, No. 3, March 1970, pp. 237-242.
23. Dokmeci, M.C., "A General Theory of Elastic Beams", Int. Journ. of Solids and Structures, Vol. 8, No. 10, October 1972, pp. 1205-1222.
24. Durelli, A. J., Parks, V. J. and Chiang, F., "Stresses and Strains in Reinforced Concrete", Journ. of Struct. Div., ASCE- Vol. 95, ST.5, May 1969, pp. 871-887.
25. Eppes, B. G., "Comparison of Measured and Calculated Stiffnesses for Beams Reinforced in Tension Only", Journ. ACI, No. 4, Oct. 1959, p. 313-325.
26. Evans, R. H., "Stresses in the Steel Reinforcement of Reinforced Concrete Structures", The Structural Engineer, Vol. 13, Sept. 1935, pp. 354-369.

27. Evans, R. H., "Experiments on Stress Distribution in Reinforced Concrete Beams", The Structural Engineer, Vol. 14, March 1936, pp. 118-130.
28. Evans, R. H., and Williams, A., "The Relation Between the Strains in the Concrete and the Steel in Reinforced and Prestressed Concrete Beams", Magazine of Concrete Research, Vol. 11, No. 32, July 1959, pp. 55-64.
29. Everard, K. A., "The Flexural Rigidity of Reinforced Concrete", Magazine of Concrete Research, Vol. 14, No. 42, November 1962, pp. 165-170.
30. Giberson, M. F., "Two Nonlinear Beams with Definitions of Ductility", Journ. Struct. Div., ASCE, Vol. 95, ST.2, Feb. 1969, pp. 137-157.
31. Gladwell, G. M. L. and Grierson, D. E., "Structural Analysis for Idealized Nonlinear Material Behavior", Journ. of Structural Mechanics, Vol. 1, No. 2, 1973.
32. Gospodnetic, D. "Deflection Curve of a Simply Supported Beam", Journ. of Applied Mech., ASME, Vol. 26, 1959, p. 675.
33. Gurfinkel, G. and Robinson, A., "Determination of Strain Distribution and Curvature in a Reinforced Concrete Section Subjected to Bending Moment and longitudinal Load", Journ. ACI, Vol. 64, No. 7, July 1967, pp. 398-403.
34. Jacobs, "Strains and Stresses in a Continuous Reinforced Concrete Beam Under Short Time Loading", Ph.D. Dissertation, Univ. of Michigan, 1956.
35. James, M. E., Kozik, T. J., and Martinez, J. E., "Effect of Curvature on Nonlinear Frame Analysis", Journ. Struct. Div., ASCE, Vol. 100, ST.7, July 1974, pp. 1451-1457.
36. Kafadar, C. B., "On the Nonlinear Theory of Rods", Int. Journ. Eng'g Science, Vol. 10, No. 4, April 1972, p. 369.
37. Kapur, K. K., "Vibrations of a Timoshenko Beam using a Finite Element Approach", Journ. Acoustical Society of America, Vol. 40, 1966, pp. 1058-1063.
38. Koenig, H. A. and Berry, G. F., "The Transient Response of Nonuniform, Non-Homogeneous Beams", Int. Journ. of Mechanical Sciences, Vol. 15, No. 5, May 1973, pp. 399-413.
39. Kroenke, W. C., Gutzwiller, M. J. and Lee, R. H., "Finite Element for Reinforced Concrete Frame Study", Journ. Struct. Div., ASCE, Vol. 99, ST.7, July 1973, pp. 1371-1390.

40. Lee, S. Y., "On the Finite Deflection Dynamics of Thin Elastic Beams", Journ. of Applied Mechanics, ASME, Vol. 38, Dec. 1971, pp. 961-963.
41. Mallett, R. H., "Mathematical Models for Structural Discrete Elements", Textron, Bell Aerosystems Company, Buffalo, N. Y., Tech. Report No. 8500-941002, June 1966.
42. Martin, H. C., "On the Derivation of Stiffness Matrices for the Analysis of Large Deflection and Stability Problems", Proc. First Conference on Matrix Methods in Structural Mechanics, WPAFB, Ohio, Oct. 26-28, 1965, AFFDL-TR-66-80, pp. 697-716.
43. Martin, H. C., "Large Deflection and Stability Analysis by the Direct Stiffness Method", Jet Propulsion Laboratory, Calif. NASA Tech. Report No. 32-931, Aug. 1966.
44. McCalley, R. B., "Mass Lumping for Beams", General Electric Co., Knolls Atomic Power Lab, Schenectady, N. Y., Report DIG/SA 63-68, July 1963.
45. McWhorter, J. C., Wetenkamp, H. R. and Sidebottom, O. M., "Finite Deflections of Curved Beams", Journ. EM Div., ASCE, Vol. 97, EM2, Paper 8046, April 1971, pp. 345-358.
46. Medland, I. C. and Taylor, D. A., "Flexural Rigidity of Concrete Column Sections", Journ. of Struct. Div., ASCE, Vol. 97, ST.2, Feb. 1971, pp. 573-586.
47. Mindlin, R. D. and Deresiewicz, H., "Timoshenko's Shear Coefficient for Flexural Vibration of Beams", Dept. of C. E., Columbia Univ., New York, Tech. Report No. 10, ONR Project NRO64-388, 1953.
48. Mirza, M. S., "An Investigation of Combined Stresses in Reinforced Concrete Beams", Ph.D. Thesis, McGill Univ., Montreal, 1967.
49. Mitchell, T. P., "The Nonlinear Bending of Thin Rods", Journ. Applied Mechanics, ASME, Vol. 26, 1959, pp. 40-43.
50. Murty, A. V. K., "Analysis of Short Beams", AIAA Journ., Vol. 8, No. 11, Nov. 1970, p. 2098.
51. Nickel, R. E. and Secor, G. A., "Convergence of Consistently Derived Timoshenko Beam Finite Elements", Int. Journ. Num. Methods Eng'g, Vol. 5, No. 2, Nov.-Dec. 1972, pp. 243-252.
52. Odqvist, F. K. G., "Nonlinear Solid Mechanics - Past, Present, and Future", Proc. 12th Int. Congress Applied Mechanics Int. Union of Theoretical and Applied Mech., Stanford Univ., Aug. 26-31, 1968, pp. 77-99.

53. Parikh, B. B., Schmidt, R., and DaDeppo, D. A., "Finite Deflections of Beams with Restrained Ends", Industrial Mathematics, Vol. 22, Part 2, 1972.
54. Parnes, R., "Bending of an Axially Constrained Beam", Int. Journ. of Mechanical Sciences, Vol. 13, No. 4, April 1971, pp. 285-290.
55. Prentis, J. M., "Analysis of Inelastic Bending Stress in Concrete Beams", Journ. ACI, Vol. 53, No. 3, Sept. 1956, pp. 309-317.
56. Rhode, F. V., "Large Deflection of a Cantilever Beam with Uniformly Distributed Load", Quarterly of Applied Math., Vol. 11, 1953, p. 337.
57. Rodden, W. P., Jones, J. P., and Bhuta, P. G., "A Matrix Formulation of the Transverse Structural Influence Coefficients of an Axially Loaded Timoshenko Beam", AIAA Journ., Vol. 1, No. 1, Jan. 1963, pp. 225-227.
58. Sabir, A. B. and Ashwell, D. G., "A Comparison of Curved Beam Finite Elements When Used in Vibration Problems", Journ. of Sound and Vibration, Vol. 18, No. 1, Sept. 1971, pp. 555-563.
59. Schmidt, R. and DaDeppo, D. A., "Nonlinear Theory of Arches and Beams with Shear Deformation", Journ. of Applied Mech., ASME, Vol. 39, No. 4, Dec. 1972, p. 1144.
60. Schmidt, R. and DaDeppo, D. A., "Nonlinear Theory of Arches with a Transverse Shear Deformation and Rotary Inertia", Industrial Mathematics, Vol. 21, Part 1, 1971, pp. 33-49.
61. Schmidt, R. and DaDeppo, D. A., "A Survey of Literature on Large Deflections of Non-shallow Arches, Bibliography of Finite Deflections of Straight and Curved Beams, Rings and Shallow Arches", Industrial Mathematics, Vol. 21, Part 2, 1971, pp. 91-114.
62. Scott, E. J. and Carver, D. R., "On the Nonlinear Differential Equation for Beam Deflection", Journ. of Applied Mech., ASME, Vol. 77, 1955, p. 245.
63. Severn, R. T., "Inclusion of Shear Deflection in the Stiffness Matrix for a Beam Element", Journ. of Strain Analysis, Vol. 5, No. 4, Oct. 1970, pp. 239-241.
64. Timoshenko, S. P., "On the Correction for Shear of the Differential Equation for Transverse Vibrations of Prismatic Bars", Philosophical Magazine, Section 6, Vol. 41, 1921, pp. 744-746.
65. Verma, M. K. and Krishnamurty, A. V., "Nonlinear Bending of Beams of Variable Cross-Section", Int. Journ. of Mechanical Sciences, Vol. 15, No. 2, Feb. 1973, pp. 183-187.

66. Walker, A. C. and Hail, D. G., "An Analysis of the Large Deflections of Beams Using the Rayleigh-Ritz Finite Element Method", Aeronautical Quarterly, Vol. 19, 1968, pp. 357-367.
67. Walz, J. E., Fulton, K. E., and Cyrus, N. J., "Accuracy and Convergence of Finite Element Approximations", Proc. Second Conf. on Matrix Methods in Structural Mechanics, Wright Patterson AFB, Ohio, Oct. 15-17, 1968, AFFDL-TR-68-150, pp. 995-1027.
68. Wang, T. M., "Nonlinear Bending of Beams with Uniformly Distributed Loads", Int. Journ. of Nonlinear Mechanics, Vol. 4, 1969, p. 389.
69. Wang, T. M., Lee, S. L., and Zienkiewicz, O. C., "A Numerical Analysis of Large Deflections of Beams", Int. Journ. of Mechanical Sciences, Vol. 3, 1961, p. 219.
70. Wen, R. K. and Toridis, T., "Discrete Dynamic Models for Elasto-Inelastic Beams", Journ. EM Div., ASCE, Vol. 90, EM5, Oct. 1964, pp. 71-102.
71. Williams, F. W., "An Approach to the Nonlinear Behavior of the Members of a Rigid Jointed Plane Framework with Finite Deflections", Quarterly Journ. of Mechanics and Applied Mathematics, Vol. 17, 1964, pp. 451-469.
72. Witmer, E. A., balmer, H. A., Leech, J. W., and Pian, T. H. H., "Large Dynamic Deformations of Beams, Circular Rings, Circular Plates and Shells", AIAA Journ., Vol. 1, 1963, pp. 1848-1857.
73. Young, D., "Stiffness Matrix for a Beam with an Axial Force", AIAA Journ., Vol. 11, No. 2, Feb. 1973, p. 246.

C.2.2 STRENGTH PROPERTIES

1. ACI Committee 318, ACI Standard, Building Code Requirements for Reinforced Concrete (ACI 318-71), ACI, Detroit, 1970.
2. ACI Committee 318, Commentary on Building Code Requirements for Reinforced Concrete (ACI 318-71), ACI, Detroit, 1970.
3. ACI Committee 439, "Effect of Steel Strength and of Reinforcement Ratio on the Mode of Failure and Strain Energy Capacity of Reinforced Concrete Beams", Journ. ACI, Vol. 66, No. 3, March 1969, pp. 165-173.
4. ACI-ASCE Committee 426, "The Shear Strength of Reinforced Concrete Members", Journ. Struct. Div., ASCE, Vol. 99, ST6, June 1973, pp. 1091-1187.
5. ACI-ASCE Committee 326, "Shear and Diagonal Tension", Journ. ACI, Vol. 59, No. 1, Jan. 1962, pp. 1-30, No. 2, Feb. 1962, pp. 277-334, No. 3, Mar. 1962, pp. 352-396.
6. Agrawal, G. L., Tulin, L. G., and Gerstle, K. H., "Response of Doubly Reinforced Beams to Cyclic Loading", Journ. ACI, Vol. 62, No. 7, July 1965, pp. 823-835.
7. Alatore, G. and Casillas, J., "Shear Strength Behavior of Concrete Beams Subjected to Alternate Loads", RILEM, International Symposium on the Effects of Repeated Loading of Materials and Structural Elements, Mexico City, 15-17 September 1966.
8. Anderson, P., "The Resistance to Combined Flexure and Compression of Square Concrete Members", Univ. of Minnesota Engineering Experiment Station, Technical Report No. 29, 1941.
9. Aoyama, H., "Moment-Curvature Characteristics of Reinforced Concrete Members Subjected to Axial Load and Reversal of Bending", Proc. International Symposium on Flexural Mechanics of Reinforced Concrete, Miami, Florida, November 10-12, 1964, ASCE-ACI Publ. SP-12 (1965), pp. 183-212.
10. Aoyama, H., "Restoring Force Characteristics Under Reversal of Loading of Reinforced Concrete Members and Structures", A Review of Japanese Research Report of the United States-Japan Seminar on Basic Research in Concrete as Related to Behavior of Structures in Earthquakes, Tokyo, Feb. 1967.
11. Arakawa, T., "Experimental Studies on Shear Strength of Reinforced Concrete Beams - Conclusions", Transactions Architectural Inst. of Japan, No. 66, Oct. 1960, pp. 437-440.

12. Bachmann, H., "Influence of Shear and Bond on Rotational Capacity of Reinforced Concrete Beams", Institut für Baustatik, E.T.H., Zurich, Report No. 36, July 1971.
13. Baldwin, J. W., Jr., and Viest, I. M., "Effect of Axial Compression on Shear Strength of Reinforced Concrete Frame Members", Journ. ACI, Vol. 55, No. 5, Nov. 1958, pp. 635-654.
14. Bara, H. C., "Effect of Axial Loading on the Shear Strength of Reinforced Concrete Beams", Ph.D. Thesis, Univ. of London, 1971.
15. Baron, M. J. and Siess, C. P., "Effect of Axial Load on the Shear Strength of Reinforced Concrete beams", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 121, June 1956.
16. Bernaert, S. and Siess, C. P., "Strength in Shear of Reinforced Concrete Beams under Uniform Load", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 120, June 1956.
17. Bertero, V. V., "Inelastic Behavior of Beam-to-Column Subassemblages Under Repeated Loading", College of Engineering, Univ. of Calif., Berkeley, Earthquake Engineering Research Center, Report No. EERC 68-2, April 1968.
18. Bertero, V. V., Bresler, B., and Liao, H., "Stiffness Degradation of Reinforced Concrete Members Subjected to Cyclic Flexural Moments", Univ. of California, Berkeley, Earthquake Engineering Research Center, Report No. EERC 69-12, Dec. 1969, p. 115.
19. Bjuggren, U., "Nomenclature for Phenomena of Failure in Reinf. Concrete Beams", Journ. ACI, Vol. 64, No. 10, Oct. 1967, pp. 625-632.
20. Borishansky, M. S., "Shear Strength of Reinforced Concrete Elements", Building Research and Documentation Contributions and Discussions at the I. CIB Congress, Rotterdam, 1959, Elsevier Publ. Co. (1961).
21. Bower, J. E. and Viest, I. M., "Shear Strength of Restrained Concrete Beams Without Web Reinforcement", Journ. ACI, Vol. 57, No. 1, July 1960, pp. 73-98.
22. Bresler, B. and Gilbert, P. H., "Tie Requirements for Reinforced Concrete Columns", Journ. ACI, Vol. 58, No. 5, November 1961, pp. 555-570.
23. Bresler, B. and Scordelis, A. C., "Shear Strength of Reinforced Concrete Beams", Dept. of Civil Engineering, Univ. of California, Berkeley, 1. Structures and Materials Research, Series 100, Issue 13, June 1961; 2. Structures and Materials Research, Series II, Report No. 64-2, Dec. 1964; 3. Structures and Materials Research, Series III,

Report No. 65-10, June 1966.

24. Bresler, B. and Scordelis, A. C., "Shear strength of Reinforced Concrete Beams", Journ. ACI, Vol. 60, No. 1, Jan. 1963, pp. 51-74.
25. Bresler, B. and MacGregor, J. C., "Review of Concrete Beams Failing in Shear", Journ. Struct. Div., ASCE, Vol. 93, ST1, Feb. 1967, pp. 343-372.
26. Bresler, B., "Behavior of Structural Elements, A Review", Building Practices for Disaster Mitigation Proc. of Workshop, Aug. 28 - Sept. 1, 1972, U. S. Dept. of Commerce, Building Science Series 46, Feb. 1973, pp. 286-351.
27. Bruce, R. N., "The Action of Vertical, Inclined, and Prestressed Stirrups in Prestressed Concrete Beams", Journ. of the Prestressed Concrete Institute, Vol. 9, No. 1, Feb. 1964, pp. 14-25.
28. Brock, G., "Effect of Shear on Ultimate Strength of Rectangular Beams with Tensile Reinforcement", Journ. ACI, Vol. 56, No. 1, Jan. 1960, pp. 619-638.
29. Brooms, B. B., "Stress Distribution, Crack Patterns, and Failure Mechanisms of Reinforced Concrete Members", Journ. ACI, Vol. 61, No. 12, Dec. 1964, pp. 1535-1558.
30. Brooms, B. B., "Shear Strength of Reinforced Concrete Beams", Journ. of Struct. Div., ASCE, Vol. 95, ST.6, June 1969, pp. 1339-1358.
31. Brooms, B. B. and Viest, I. M., "Ultimate Strength Analysis of Long Hinged Reinforced Concrete Column", Journ. Struct. Div., ASCE, Vol. 84, ST.1, Jan. 1958, pp. 1-38.
32. Brown, R. H. and Jirsa, J. O., "Reinforced Concrete Beams Under Load Reversals", Journ. ACI, Vol. 68, No. 5, May 1971, pp. 380-390.
33. Bryant, R. H., Bianchini, A. C., Rodrigues, J. J., and Kesler, C. E., "Shear Strength of Two-Span Continuous Reinforced Concrete Beams with Multiple Point Loading", Journ. ACI, Vol. 59, No. 9, Sept. 1962, pp. 1143-1178.
34. Buettner, D. R., "Plastic Hinging in Reinforced Concrete Beams", Ph.D. Thesis, Univ. of Wisconsin, 1964.
35. Burdette, E. G. and Hilsdorf, H. K., "Behavior of Laterally Reinforced Concrete Columns", Journ. Struct. Div., ASCE, Vol. 97, ST.2, Feb. 1971, pp. 587-602.
36. Brunett, E. F. P. and Trenberth, R. J., "Column Load Influence on Reinforced Concrete Beam-Column Connection", Journ. ACI, Vol. 69, No. 2, Feb. 1972, pp. 101-109.

37. Burns, N. H. and Siess, C. P., "Load-Deformation Characteristics of Beam-Column Connections in Reinforced Concrete", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 234, Jan. 1962.
38. Burns, N. H. and Siess, C. P., "Plastic Hinging in Reinforced Concrete", Journ. Struct. Div., ASCE, Vol. 92, ST.5, Oct. 1966, pp. 45-64.
39. Burns, N. H. and Siess, C. P., "Repeated and Reversed Loading in Reinforced Concrete", Journ. Struct. Div., ASCE, Vol. 92, No. ST.5 October 1966, pp. 65-78.
40. Chan, W. W. L., "The Ultimate Strength and Deformation of Plastic Hinges in Reinforced Concrete Frameworks", Magazine of Concrete Research, Vol. 7, No. 21, Nov. 1955, pp. 121-132.
41. Chan, W. W. L., "The Rotation of Reinforced Concrete Plastic Hinges at Ultimate Load", Magazine of Concrete Research, Vol. 14, No. 41, July 1962, pp. 63-72.
42. Clark, A. P., "Diagonal Tension in Reinforced Concrete Beams", Journ. ACI, Vol. 48, No. 2, Oct. 1951, pp. 145-156.
43. Clough, R. W., "Effect of Stiffness Degradation on Earthquake Ductility Requirements", Structural Engineering Laboratory, Univ. of California, Berkeley, Report No. 66-16, Oct. 1966.
44. Corley, W. G., "Rotational Capacity of Reinforced Concrete Beams", Journ. Struct. Div., ASCE, Vol. 92, ST.5, Oct. 1966, pp. 121-146.
45. Cowan, H. J., "Inelastic Deformation of Reinforced Concrete in Relation to Ultimate Strength", Engineering, Vol. 174, No. 4518, Aug. 29, 1952, pp. 276-278.
46. Cranston, W. B., "The Influence of Shear on the Rotation Capacity of Reinforced Concrete Beams", Cement and Concrete Association, Technical Report TRA 439, April 1970.
47. Danesi, R. F., "Rotational Capacity of Compression Plastic Hinges in Reinforced Concrete Beams Subjected to Combined Axial and Transverse Load", M.S. Thesis, Rutgers Univ, New Brunswick, N. J., Nov. 1966.
48. Desayi, P., "A Method for Determining the Shear Strength of Reinforced Concrete Beams with Small A_v/d Ratios", Magazine of Concrete Research, Vol. 26, No. 86, March 1974, pp. 29-38.
49. Diaz de Cossio, R. and Siess, C. P., "Behavior and Strength in Shear of Beams and Frames Without Web Reinforcement", Journ. ACI, Vol. 56, No. 8, Feb. 1960, pp. 695-735.

50. Elloseily, H., "Ultimate Strength of Rectangular Reinforced Concrete Sections", Institut fur Baustatik, E.T.H. Zurich, Report No. 15, Dec. 1967.
51. Elstner, R. C., Moody, K. G., Viest, I. M., and Hognestad, E., "Shear Strength of Reinforced Concrete Beams - Part 3 - Tests of R-strained Beams with Web Reinforcement", Journ. ACI, Vol. 51, No. 6, Feb. 1955, pp. 525-539.
52. Ernst, G. C., "Plastic Hinging at the Intersections of Beams and Columns", Journ. ACI, Vol. 53, No. 12, June 1957, pp. 1119-1144.
53. Feldman, A. and Siess, C. P., "Effect of Moment-Shear Ratio on Diagonal Tension Cracking and Strength in Shear of Reinforced Concrete Beams", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 107, June 1955.
54. Feldman, A., Keenan, W. A., and Siess, C. P., "Investigation of Resistance and Behavior of Reinforced Concrete Members Subjected to Dynamic Loading", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 243, Feb. 1962.
55. Fenwick, R. C., "The Shear Strength of Reinforced Concrete Beams", Ph.D. Thesis, Univ. of Canterbury, Christchurch, New Zealand, 1966.
56. Fergusen, P. M., "Some Implications of Recent Diagonal Tension Tests", Journ. ACI, Vol. 53, No. 2, Aug. 1956, pp. 157-172.
57. Forssell, C., "Tests of Shear Strength and Shear Reinforcement of Concrete Beams", Transactions - Swedish Cement and Concrete Institute at the Royal Inst. of Tech., Stockholm, No. 78, 1954.
58. Gaston, J. R., Siess, C. P., and Newmark, N. M., "An Investigation of the Load-Deformation Characteristics of Reinforced Concrete Beams Up to the Point of Failure", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 40, Dec. 1952.
59. Guralnick, S. A., "High Strength Deformed Steel Bars for Concrete Reinforcement", Journ. ACI, Vol. 57, No. 3, Sept. 1960, pp. 241-282.
60. Guralnick, S. A., "Strength of Reinforced Concrete Beams", Transactions ASCE, Vol. 125, 1960, pp. 603-633, (Discussion pp. 633-643) (also Journ. Struct. Div., ASCE, paper 1909, Jan. 1959).
61. Gurfinkel, G. and Siess, C. P., "Longitudinally Restrained Reinforced Concrete Beams", Journ. Struct. Div., ASCE, Vol. 94, ST.3, March 1968, pp. 709-735.

62. Haddadin, M. J., Hong, S., and Mattock, A. H., "A Study of the Effectiveness of Web Reinforcement in Concrete Beams Subjected to Axial Forces", Univ. of Washington, Seattle, Structures and Mechanics Rep. SM69-2, Sept. 1969.
63. Haddadin, M. J., Hong, S., and Mattock, A. H., "Stirrup Effectiveness in Reinforced Concrete Beams with Axial Force", Journ. Struct. Div., ASCE, Vol. 97, ST.9, Sept. 1971, pp. 2277-2297.
64. Hammond, F. A. and Smith, R. B. L., "A Preliminary Study of Ultimate Load Moment-Shear Interaction in Reinforced Concrete Beams", Civil Engineering and Public Works Review, Vol. 55, No. 647, June 1960, p. 792-794.
65. Hellesland, J. and Green, R., "Sustained and Cyclic Loading of Concrete Columns", Journ. of Struct. Div., ASCE, Vol. 97, ST.4, April 1971, pp. 1113-1128.
66. Herr, L. A. and Vandegrift, L. E., "Studies of Compressive Stress Distribution in Simply Reinforced Concrete Near the Point of Failure", Proc. Highway Research Board, Vol. 30, 1950, pp. 114-125.
67. Higashi, Y. and Ohwada, Y., "Failing Behavior of Reinforced Concrete Beam-Column Connection Subjected to Lateral Load", Memoirs of Faculty of Technology, Tokyo Metropolitan Univ., No. 19, 1969, pp. 91-101.
68. Hognestad, E., "A Study of Combined Bending and Axial Load in Reinforced Concrete Members", University of Illinois, Engineering Experiment Station, Bulletin Series, No. 399, Nov. 1951, 128 p.
69. Hognestad, E. and Elstner, R. C., "An Investigation of Reinforced Concrete Beams Failing in Shear", Engineering Experiment Station, Univ. of Illinois, Oct. 1951.
70. Hognestad, E., "What do We Know About Diagonal Tension and Web Reinforcement in Concrete?", Univ. of Illinois, Engineering Experiment Station, Circular Series No. 64, Mar. 1952.
71. Hognestad, E., Hanson, N. W. and McHenry, D., "Concrete Stress Distribution in Ultimate Strength Design", Journ. ACI, Vol. 52, No. 4, Dec. 1955, pp. 455-480.
72. Hognestad, E., "Confirmation of Inelastic Stress Distribution in Concrete", Journ. of Struct. Div., ASCE, Vol. 83, ST.2, March 1957, pp. 1189-1 - 1189-17.

73. Iyengar, K. T. S. R., Rangan, B. V., and Paloniswamy, R., "Some Factors Affecting Shear Strength of Reinforced Concrete Beams", Indian Concrete Journ., Vol. 42, Dec. 1968, pp. 499-505.
74. Iyengar, K. T. Sundara Raja, Desayi, P., and Viswanatha, C. S., "A New Approach for the Prediction of 'True Ultimate Strength' of Reinforced Concrete Flexural Members", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM, and the Concrete Society, pp. 1313-1319, (ed.) Te'eni, M.
75. Jensen, V. P., "Ultimate Strength of Reinforced Concrete Beams as Related to the Plasticity Ratio of Concrete", Univ. of Illinois, Engineering Experiment Station, Bulletin No. 345, June 1943, p. 60.
76. Jensen, V. P., "The Plasticity Ratio of Concrete and Its Effect on the Ultimate Strength of Beams", Journ. ACI, Vol. 39, June 1943, pp. 565-582.
77. Jones, R., "The Ultimate Strength of Reinforced Concrete Beams in Shear", Magazine of Concrete Research, Vol. 8, No. 23, Aug. 1956, pp. 69-84.
78. Jorgensen, I. F., "Influence of Reinforcement Stress - Strain Curves on a Concrete Member at Ultimate Load", Journ. ACI, Vol. 59, No. 3, March 1962, pp. 453-462.
79. Kani, G. N. J., "The Mechanism of the So-Called Shear Failure", Transactions Engineering Institute of Canada, Vol. 6, No. A-3, April 1963.
80. Kani, G. N. J., "The Riddle of Shear Failure and Its Solution", Journ. ACI, Vol. 61, No. 4, April 1964, pp. 441-467.
81. Kani, G. N. J., "Basic Facts Concerning Shear Failure", Journ. ACI, Vol. 63, No. 6, June 1966, pp. 675-692.
82. Kani, G. N. J., "How Safe are our Large Reinforced Concrete Beams", Journ. ACI, Vol. 64, No. 3, March 1967, pp. 128-141.
83. Kani, G. N. J., "A Rational Theory for the Function of Web Reinforcement", Journ. ACI, Vol. 66, No. 3, March 1969, pp. 185-197.
84. Keenan, W. A., "Dynamic Shear Strength of Reinforced Concrete Beams - Part I", Naval Civil Engineering Laboratory, Port Hueneme, Calif., Technical Report R-395, Dec. 1965.
85. Kent, D. C., "Inelastic Behavior of Reinforced Concrete Members with Cyclic Loading", Ph.D. Thesis, Univ. of Canterbury, Christchurch, New Zealand, 1969.

86. Kent, D. C. and Park, R., "Flexural Members with Confined Concrete", Journ. Struct. Div., ASCE, Vol. 97, ST.7, July 1971, pp. 1969-1990.
87. Khan and Mattock, A.H., "An Experimental Investigation of the Influence of the Formation of a Plastic Hinge on the Shear Strength of a Singly Reinforced Concrete Beam", Magazine of Concrete Research, Vol. 8, No. 24, Nov. 1956, p. 151.
88. Kokubu, M. and Higai, T., "Shear Failure of Reinforced Concrete Beams Subjected to Repeated Loading", Memoirs of Faculty of Engineering, Univ. of Tokyo, Japan, 1971, pp. 195-198.
89. Kokusho, S., "Experimental Study of Ultimate Strength and Load Deflection Characteristics of Reinforced Concrete Columns", Building Research Institute, the Ministry of Construction, Japan, Research Report No. 46, Oct. 1965.
90. Kokusho, S. and Hayashi, S., "Strength Reduction of Reinforced Concrete Members Due to Alternately Cyclic Loading", Proc. of the Tokyo Meeting of ASCE-IABSE Joint Committee on Tall Buildings, Technical Report TC-26.
91. Kokusho, S. and Ogura, K., "Shear Strength and Load Deflection Characteristics of Reinforced Concrete Members", Proc. U. S. - Japan Seminar on Earthquake Engineering with Emphasis on the Safety of School Buildings, Sendai, Japan, 21-26 September 1970, Japan Earthquake Engineering Promotion Society, 1971, pp. 364-381.
92. Krefeld, W. J. and Thurston, C. W., "Contribution of Longitudinal Steel to Shear Resistance of Reinforced Concrete Beams", Journ. ACI, Vol. 63, No. 3, Mar. 1966, pp. 325-344.
93. Krefeld, W. J. and Thurston, C. W., "Studies of the Shear and Diagonal Tension Strength of Simply Supported Reinforced Concrete Beams", Journ. ACI, Vol. 63, No. 4, April 1966, pp. 451-476.
94. Kriz, L. B., "Ultimate Strength Criteria for Reinforced Concrete", Journ. of EM. Div., ASCE, Vol. 85, EM3, July 1959, pp. 95-110.
95. Kriz, L. B. and Lee, S. L., "Ultimate Strength of Over-Reinforced Beams", Journ. EM Div., ASCE, Vol. 86, EM3, June 1960, pp. 95-105.
96. Lash, S. D., "Ultimate Strength and Cracking Resistance of Lightly Reinforced Beams", Journ. ACI, Vol. 49, No. 6, Feb. 1953, pp. 573-584.
97. Lash, S. D. and Brison, J. W., "The Ultimate Strength of Reinforced Concrete Beams", Journ. ACI, Vol. 46, Feb. 1950, pp. 457-470.

98. Laupa, A., "The Shear Strength of Reinforced Concrete Beams", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 62, Sept. 1953.
99. Laupa, A., Siess, C. P., and Newmark, N. M., "The Shear Strength of Simple Span Reinforced Concrete Beams Without Web Reinforcement", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 52, April 1953.
100. Laupa, A., Siess, C. P., and Newmark, N. M., "Strength in Shear of Reinforced Concrete Beams", Univ. of Illinois, Engineering Experiment Station, Bulletin No. 428, March 1955.
101. Lee, L. H. N., "Inelastic Behavior of Reinforced Concrete Members Subjected to Short-Time Static Loads", Proc. ASCE, Vol. 79, Separate No. 286, Sept. 1953 (also Transactions, ASCE, Vol. 120, 1955, pp. 181-207).
102. Leonhardt, F. and Walther, F., "Contributions to the Treatment of the Problems of Shear in Reinforced Concrete Construction", Cement and Concrete Assoc. (London), Translation No. 111, 1964 (also: Beton und Stahlbetonbau (in German) Vol. 56, No. 12, Dec. 1961; Vol. 57, No. 2, Feb. 1962; Vol. 57, No. 3, Mar. 1962; Vol. 57, No. 6, June 1962; Vol. 57, No. 7, July 1962; Vol. 57, No. 8, Aug. 1962).
103. Leonhardt, F. and Walther, R., "Shear Tests of Single-Span Reinforced Concrete Beams", Deutscher Ausschuss fur Stahlbeton, Bulletin 151, Berlin, 1962.
104. Leonhardt, F., Walther, R. and Dilger, W., "Shear Tests on Continuous Beams", Deutscher Ausschuss fur Stahlbeton, No. 163, 1964.
105. Leonhardt, F., Walther, R. and Dilger, W., "Shear Tests on Indirectly Loaded, Simple and Continuous Reinforced Concrete Beams", (in German), Deutscher Ausschuss fur Stahlbeton, Vol. 201, 1968.
106. Lorentsen, M., "Theory for the Combined Action of Bending Moment and Shear in Reinforced and Prestressed Concrete Beams", Journ. ACI, Vol. 62, No. 4, April 1965, pp. 403-420.
107. Lukey, A. F. and Adams, P. F., "Rotation Capacity of Beams Under Moment Gradient", Journ. Struct. Div., ASCE, Vol. 95, ST.6, June 1969, pp. 1173-1188.
108. MacGregor, J. G. and Hanson, J. M., "The Shear Strength of Reinforced Concrete Members", Journ. ACI, Vol. 70, No. 7, July 1973, pp. 471-473.
109. Maldague, J. C., "Tests of Reinforced Concrete Beams in the Plastic Rang", (in French) Proc. 7th Congress, IABSE, Rio de Janeiro, 1964, Preliminary Publ., p. 951.

110. Mathey, R. G. and Watstein, D., "Shear Strength of Beams without Web Reinforcement Containing Deformed Bars of Different Yield Strengths", Journ. ACI, Vol. 60, No. 2, Feb. 1963, pp. 183-207.
111. Mattock, A. H., "Rotational Capacity of Hinging Regions in Reinforced Concrete Beams", Proc. Int. Symposium on Flexural Mechanics of Reinforced Concrete, Miami, Florida, Nov. 10-12, 1964, ASCE-ACI Publ. SP-12 (1965), pp. 143-181.
112. Mattock, A. H., "Diagonal Tension Cracking in Concrete Beams with Axial Forces", Journ. of Struct. Div., ASCE, Vol. 95, ST.9, Sept. 1969, pp. 1887-1900.
113. McClure, G. S., Gerstle, K. H., Tulin, L. G., "Sustained and Cyclic Loading of Concrete Beams", Journ. Struct. Div., ASCE, Vol. 99, ST.2, Feb. 1973, pp. 243-257.
114. Miller, C. A. and Guralnick, S. A., "Reinforced Concrete Beams Subjected to Repeated Loads", Journ. Struct. Div., ASCE, Vol. 93, ST.5, Oct. 1967, pp. 67-84.
115. Mitra, A. C., "Effect of Shear on the Moment-Rotation Characteristics of Continuous Beams", Ph.D. Thesis, Univ. of London, 1971.
116. Moody, K. G., Viest, I. M., Elstner, R. C., and Hognestad, E., "Shear Strength of Reinforced Concrete Beams", Part 1 - Tests of Simple Beams, Journ. ACI, Vol. 51, No. 4, Dec. 1954, pp. 317-332.
117. Moody, K. G., Viest, I. M., Elstner, R. C., and Hognestad, E., "Shear Strength of Reinforced Concrete Beams - Part 2 - Tests of Restrained Beams without Web Reinforcement", Journ. ACI, Vol. 51, No. 5, Jan. 1955, pp. 417-434.
118. Moody, K. G. and Viest, I. M., "Shear Strength of Reinforced Concrete Beams", Part 4 - Analytical Studies, Journ. ACI, Vol. 51, No. 7, March 1955, pp. 697-730.
119. Moretto, O., "An Investigation of the Strength of Welded Stirrups in Reinforced Concrete Beams", Journ. ACI, Vol. 42, No. 2, Nov. 1945, pp. 141-162.
120. Morrow, J. and Viest, I. M., "Shear Strength of Reinforced Concrete Frame Members without Web Reinforcement", Journ. ACI, Vol. 53, No. 9, March 1957, pp. 833-869.
121. Morsch, E., "Investigation of Shear Stresses in Reinforced Concrete Beams", (in German) Deutsche Bauzeitung, Vol. 2, No. 4, Oct. 1903, pp. 269-274.

122. Nordell, W. J., "Plastic Hinge Formation in Reinforced Concrete Beams", U. S. Naval Civil Engineering Laboratory, Port Hueneme, Calif., Technical Report R 271, June 1965.
123. Nordell, W. J., "Hinging in Statically and Dynamically Loaded Reinforced Concrete Beams", U. S. Naval Civil Engineering Laboratory, Port Hueneme, Calif., Technical Report R489, Oct. 1966.
124. Nasseir, S. B., "Static and Dynamic Behavior of Concrete Beams Failing in Shear", Ph.D. Thesis, Univ. of Texas, Austin, June 1966.
125. Nylander, H. and Sahlin, S., "Investigations of Continuous Concrete Beams at Far Advanced Compressive Strains in Concrete", (in Swedish) Betong, Vol. 40, No. 3, 1955, (Translation: Cement and Concrete Assoc. Library Translation No. 66).
126. Ogura, K., "Test of Reinforced Concrete Beams Under Reversal of Loading to Failure", Bulletin of Architectural Inst. of Japan, No. 13, Aug. 1951, pp. 1-4.
127. Ojha, S. K., "The Shear Strength of Rectangular Reinforced and Prestressed Concrete Beams", Magazine of Concrete Research, Vol. 19, No. 60, September 1967, pp. 173-184.
128. Ojha, S. K., "The Shear Strength of Uniformly Loaded Beams without Web Reinforcement", Magazine of Concrete Research, Vol. 23, No. 75-76, June-Sept., 1971, pp. 111-118.
129. Oladapo, I. O., "Cracking and Failure in Plain Concrete Beams", Magazine of Concrete Research, Vol. 16, No. 47, June 1964, pp. 103-110.
130. Park, R., Kent, D. C., and Sampson, R. A., "Reinforced Concrete Members with Cyclic Loading", Journ. Struct. Div., ASCE, Vol. 98, ST.7, July 1972, pp. 1341-1360.
131. Park, R. and Sampson, R. A., "Ductility of Reinforced Concrete Column Sections in Seismic Design", Journ. ACI, Vol. 69, No. 9, Sept. 1972, pp. 543-551.
132. Parmelee, R. A., "A Study of the Ultimate Strength of Reinforced Concrete Beams", Univ. of Calif., Berkeley, Structural Engineering and Structural Mechanics Report No. 61-11, Jan. 1961.
133. Pfister, J. F., "Influence of Ties on the Behavior of Reinforced Concrete Columns", Journ. ACI, Vol. 61, No. 5, May 1964, pp. 521-537.
134. Pfrang, E. O. and Siess, C. P., "Behavior of Restrained Reinforced Concrete Columns", Journ. Struct. Div., ASCE, Vol. 90, ST.5, Oct. 1964, pp. 113-136.

135. Placas, A., Regan, P. E., and Baker, A. L. L., "Shear Failure of Reinforced Concrete Beams", Journ. ACI, Vol. 68, No. 10, Oct. 1971, pp. 763-773.
136. Prentis, J. M., "The Distribution of Concrete Stress in Reinforced and Prestressed Concrete Beams when Tested to Destruction by a Pure Bending Moment", Magazine of Concrete Research, Vol. 2, No. 5, Jan. 1951, pp. 73-77.
137. Pume, D., "Stress Distribution and Ultimate Strength of Joints", Die Bautechnik, No. 12, 1970.
138. Rajagopalan, K. S. and Ferguson, P. M., "Exploratory Shear Tests Emphasizing Percentage of Longitudinal Steel", Journ. ACI, Vol. 65, No. 8, Aug. 1968, pp. 634-638.
139. Rao, P. S., Kannan, P. R., and Subrahmanyam, B. V., "Influence of Span Length and Application of Load on the Rotation Capacity of Plastic Hinges", Journ. ACI, Vol. 68, No. 6, June 1971, pp. 468-471.
140. Regan, P. E., "Combined Shear and Bending in Reinforced Concrete Members", Ph.D. Thesis, Univ. of London, April 1967.
141. Regan, P. E., "Shear Strengths of Reinforced Concrete Beams", Imperial College of Science and Technology, London, 1968.
142. Regan, P. E., "Shear in Reinforced Concrete Beams", Magazine of Concrete Research, Vol. 21, No. 66, March 1969, pp. 31-42.
143. Regan, P. E., "Behavior of Reinforced and Prestressed Concrete Subjected to Shear Forces", Proc. Inst. of Civil Engineering, Suppt. 17, 1971, pp. 337-364.
144. Regan, P. E. and Mitra, A. C., "Curtailement of Main Reinforcing Steel and Its Effects on Shear", The Structural Engineer, Vol. 50, No. 11, Nov. 1972, pp. 445-449.
145. Renton, G., "The Behavior of Reinforced Concrete Beam-Column Joints Under Cyclic Loading", M.E. Thesis, Univ. of Canterbury, Christchurch, New Zealand, 1972.
146. Rhomberg, E. J., "The Effect of Combined Moment and Shear on Formation of Plastic Hinges in Reinforced Concrete Beams", Ph.D. Dissertation, Iowa State Univ., 1963.
147. Richart, F. E., "An Investigation of Web Stresses in Reinforced Concrete Beams", Univ. of Illinois, Engineering Experiment Station, Bulletin No. 166, 1927.

148. Richart, F. E., and Brown, R. L., "An Investigation of Reinforced Concrete Columns", University of Illinois - Engineering Experiment Station, Bulletin No. 267, June 1934, p. 91.
149. Robinson, J. R., "Influence of Transverse Reinforcement on Shear and Bond Strength", Journ. ACI, Vol. 62, No. 3, Mar. 1965, pp. 343-362.
150. Rodriguez, J. J., Bianchini, A. C., Viest, I. M., and Kesler, C. E., "Shear Strength of Two-Span Continuous Reinforced Concrete Beams", Journ. ACI, Vol. 55, No. 10, April 1959, pp. 1089-1130.
151. Romualdi, J. P. and Batson, G. B., "Behavior of Reinforced Concrete Beams with Closely Spaced Reinforcement", Journ. ACI, Vol. 60, No. 6, June 1963, pp. 775-790.
152. Ruiz, W. M. and Winter, G., "Reinforced Concrete Beams Under Repeated Loads", Journ. of Struct. Div., ASCE, Vol. 95, ST.6, June 1969, pp. 1189-1211.
153. Rusch, H., "Tests on the Strength of the Flexural Compression Zone", (in German) Deutscher Ausschuss fur Stahlbetonbau, Berlin, Bulletin No. 120, 1955.
154. Rusch, H. and Stockl, S., "The Effects of Stirrups and Compression Reinforcement on the Flexural Compression Zone of Reinforced Concrete Beams", (in German) Deutscher Ausschuss fur Stahlbeton, Berlin, Bulletin No. 148, 1963, p. 75.
155. Rusch, H., Haugli, F. R., and Mayer, H., "Shear Tests on Rectangular Reinforced Concrete Beams Under Uniform Distributed Load", Deutscher Ausschuss fur Stahlbeton, Berlin, Bulletin 145, 1962, p. 72.
156. Sahlin, S., "The Effect of Excessive Concrete Strain on Concrete Beams Under the Influence of Flexural Moment", Betong, 1955.
157. Sargin, M., "Strength and Deformability of Structural Concrete Sections and the Factors Affecting Them", Colloquium on the Limit Design for Structural Concrete, Univ. of Waterloo, Waterloo, Ontario, Canada, Sept. 6-8, 1967.
158. Seabold, R. H., "Dynamic Shear Strength of Reinforced Concrete Beams - Part II", Naval Civil Engineering Laboratory, Port Hueneme, Calif., Technical Report R-502, Jan. 1967.
159. Seabold, R. H., "Dynamic Shear Strength of Reinforced Concrete Beams - Part III", Naval Civil Engineering Laboratory, Port Hueneme, Calif., Technical Report R695, Sept. 1970.

160. Singh, H. N., Gerstle, K. H., and Tulin, L. G., "Shear Strength of Concrete Beams Under Cyclic Loading", Int. Symposium on Shear, Bond and Torsion, PSG College of Technology, Coimbatore, India, Jan. 1969.
161. Sinha, N. C. and Ferguson, P. M., "Ultimate Strength with High Strength Reinforcing Steel with and Indefinite Yield Point", Journ. ACI, Vol. 61, No. 4, April 1964, pp. 399-418.
162. Sinha, B. P., Gerstle, K. H., and Tulin, L. G., "Response of Singly Reinforced Beams to Cyclic Loading", Journ. ACI, Vol. 61, No. 8, August 1964, pp. 1021-1038.
163. Smith, G. M. and Young, L. E., "Ultimate Theory in Flexure by Exponential Functions", Journ. ACI, Vol. 52, No. 3, Nov. 1955, pp. 349-359.
164. Smith, G. M. and Young, L. E., "Ultimate Flexural Analysis Based on Stress-Strain Curves of Cylinders", Journ. ACI, Vol. 53, No. 6, Dec. 1956, pp. 597-609.
165. Smith, R. B. L., "The Influence of Shear on the Moment of Resistance of Reinforced Concrete Beams", Paper read before the Lancashire and Cheshire Branch of the Institution of Structural Engineers, March 1958.
166. Smith, R. B. L., "A Study of the Effects of Shear on the Strength of Reinforced Concrete Beams without Web Reinforcement, with some Deductions on the Function of Web Reinforcement", College of Science and Technology, Manchester, England, Structural Eng'g. Dept., 1965.
167. Smith, R. G. and Matthew, G. D., "Behavior of Reinforced Concrete Beams in Flexure", The Engineer, Vol. 212, Dec. 1961, pp. 1067-1070.
168. Soliman, M. T. M., "Ultimate Strength and Plastic Rotation Capacity of Reinforced Concrete Members", Ph.D. Thesis, Univ. of London, 1966.
169. Sundara, Raja Iyengar, K. T., Desayi, P., and Reddy, K. N., "Flexure of Reinforced Concrete Beams with Confined Compression Zones", Journ. ACI, Vol. 68, No. 9, Sept. 1971, pp. 719-725.
170. Sunderland, A., "The Strength of Reinforced Concrete Beams in Shear", Magazine of Concrete Research, Vol. 1, No. 1, Jan. 1949, pp. 3-8.
171. Swamy, R. N., "Shear Failure in Reinforced Concrete Beams without Web Reinforcement", Civil Eng'g and Public Works Review, Part 1: Vol. 64, No. 751, Feb. 1969, pp. 129-135; Part 2: Vol. 64, No. 752, March 1969, pp. 237-243.

172. Takeda, T., "Study of Reinforced Concrete Members Subjected to Cyclic Plastic Deformation", Ph.D. Thesis, Univ. of Tokyo, 1963.
173. Takeda, T., Sozen, M. A., and Nielsen, N. N., "Reinforced Concrete Response to Simulated Earthquakes", Journ. Struct. Div., ASCE, Vol. 96, ST.12, Dec. 1970, pp. 2557-2573.
174. Talbot, A. N., "Tests of Reinforced Concrete Beams - Series of 1905", Univ. of Illinois, Engineering Experiment Station, Bulletin No. 4, April 1906.
175. Talbot, A. N., "Tests of Concrete and Reinforced Concrete Columns", Univ. of Illinois, Bulletin No. 2, 1907.
176. Talbot, A. N., "Tests of Reinforced Concrete Beams: Resistance to Web Stresses", Univ. of Illinois, Engineering Experiment Station, Bulletin No. 29, 1909, p. 85.
177. Taub, J. and Neville, A. M., "Resistance to Shear of Reinforced Concrete Beams", Journ. ACI, Part 1: "Beams without Web Reinforcement", Vol. 57, No. 2, Aug. 1960, pp. 193-220; Part 2: "Beams with Vertical Stirrups", Vol. 57, No. 3, Sept. 1960, pp. 315-336.
178. Taylor, H. P. J., "The Fundamental Behavior of Reinforced Concrete Beams in Bending and Shear", Cement and Concrete Association, Paper for Publication - PP/113, Dec. 1972 (also Ph.D. thesis, City Univ., London, 1971).
179. Taylor, H. P. J., "Shear Strength of Large Beams", Journ of Struct. Div., ASCE, Vol. 98, ST.11, Nov. 1972, pp. 2473-2490.
180. Taylor, R., "A Note on the Mechanism of Diagonal Cracking in Reinforced Concrete Beams without Shear Reinforcement", Magazine of Concrete Research, Vol. 11, No. 33, November 1959, pp. 159-162.
181. Taylor, R., "Some Shear Tests on Reinforced Concrete Beams without Shear Reinforcement", Magazine of Concrete Research, Vol. 12, No. 36, November 1960, pp. 145-154.
182. Taylor, R., "Some Aspects of the Problem of Shear in Reinforced Concrete Beams", Civil Engineering and Public Works Review, Part 1: Vol. 58, No. 682, May 1963, pp. 629-632; Part 2; Vol. 58, No. 683, June 1963, pp. 768-770.
183. Thomas, K. and Sozen, M. A., "A Study of the Inelastic Rotation Mechanism of Reinforced Concrete Connections", Univ. of Illinois, Civil Engineering Studies, Structural Research, Series No. 301, Aug. 1965.

184. Tichy, M., "Discontinuity of the Strength in Bending and Shear of Reinforced Concrete Beams", Journ. ACI, Vol. 67, No. 3, March 1970, pp. 249-252.
185. Townsend, W. H., "The Inelastic Behavior of Reinforced Concrete Beam-Column Connections", Ph.D. Dissertation, Univ. of Michigan, 1972.
186. Trott, J. J. and Fox, E. N., "Comparison of the Behavior of Concrete Beams Under Static and Dynamic Loading", Magazine of Concrete Research, Vol. 11, No. 31, March 1959, pp. 15-24.
187. Umemura, H., "Inelastic Deformation and Ultimate Strength of Reinforced Concrete Beams", Transactions Architectural Inst. of Japan, No. 42, Feb. 1951, pp. 59-70.
188. U. S. Army Corps of Engineers, Engineering and Design - Design of Structures to Resist the Effects of Atomic Weapons: Strength of Materials and Structural Elements, Manual: EM 1110-345-414, March 15, 1957.
189. Vanden Berg, F. J., "Shear Strength of Reinforced Concrete Beams without Web Reinforcement", Journ. ACI, Part 1: "Distribution of Stresses on a Beam Cross Section", Vol. 59, No. 10, Oct. 1962, pp. 1467-1477; Part 2: "Factors Affecting Load at Diagonal Cracking", Vol. 59, No. 11, Nov. 1962, pp. 1587-1600.
190. Verna, J. R. and Stelson, T. E., "Repeated Loading Effect on Ultimate Static Strength of Concrete Beams", Journ. ACI, Vol. 60, No. 6, June 1963, pp. 743-750.
191. Wakabayashi, M., Minami, K., and Yamaguchi, T., "An Experimental Study on Shear Failure of Reinforced Concrete Columns under Cyclic Loading", Kyoto Univ., Japan, April 1971.
192. Watstein, D. and Mathey, R. G., "Strains in Beams Having Diagonal Cracks", Journ. ACI, Vol. 55, No. 6, Dec. 1958, pp. 717-728.
193. Whitney, C. S., "Ultimate Shear Strength of Reinforced Concrete Flat Slabs, Footings, Beams, and Frame Members without Shear Reinforcement", Journ. ACI, Vol. 54, No. 4, Oct. 1957, pp. 265-298.
194. Wilby, C. B., "The Strength of Reinforced Concrete Beams in Shear", Magazine of Concrete Research, Vol. 3, No. 7, Aug. 1951, pp. 23-30.
195. Yamada, M., "Behavior of Plastic Hinges in Reinforced Concrete Columns", (in German) Proc. Seventh Congress, IABSE, Rio de Janeiro, Brazil, 10-16 August 1964, Final Report (1965), pp. 435-442.

196. Yamada, M., "Low Cycle Fatigue Fracture Limits of Various Kinds of Structural Members Subjected to Alternately Repeated Plastic Bending Under Axial Compression as an Evaluation Basis or Design Criteria for Aseismic Capacity", Proc. Fourth World Conf. on Earthquake Engineering, Santiago, Chile, 1969, Vol. 1, pp. (B-2) 137-151.
197. Yamada, M., Kawamura, H., and Shigezo, F., "Low Cycle Fatigue of Reinforced Concrete Columns". Proc. RILEM, International Symposium on the Effects of Repeated Loading of Materials and Structural Elements, Mexico City, 15-17 September 1966.
198. Yamada, M. and Furu, S., "Shear Resistance and Explosive Cleavage Failure of Reinforced Concrete Members Subjected to Axial Load", Eight Congress, IABSE, New York, Sept. 1968, pp. 1091-1102.
199. Yamada, M., "Shear Explosion of Reinforced Concrete Columns - As the Research Documents for the Analysis of Destroyed Reinforced Concrete Buildings at the Tokachi-Oki Earthquake", Transactions Architectural Institute of Japan, No. 170, April 1970.
200. Yamashiro, R. and Siess, C. P., "Moment Rotation Characteristics of Reinforced Concrete Members Subjected to Bending, Shear and Axial Load", Univ. of Illinois, Civil Engineering Studies, Research Series No. 260, Dec. 1962.
201. Yokel, F. Y., "Stability and Load Capacity of Members with no Tensile Strength", Journ. of Struct. Div., ASCE, Vol. 97, ST.7, July 1971, pp. 1913-1926.
202. Zielinski, "Behavior and Ultimate Strength of Rectangular Reinforced Concrete Beams in Bending and High Shear", Dept. of Engineering Research, School of Engineering, North Carolina State Univ., Engineering School Bulletin No. 81, 111, Sept. 1967.
203. Zsutty, T. C., "Beam Shear Strength Prediction by Analysis of Existing Data", Journ. ACI, Vol. 65, No. 11, Nov. 1968, pp. 943-951.
204. Zsutty, T. C., "Shear Strength Prediction for Separate Categories of Simple Beam Tests", Journ. ACI, Vol. 68, No. 2, Feb. 1971, pp. 138-143.

C.3 SYSTEM BEHAVIOR

1. Adenot, A., "Behavior of a Double-Bay One Storey Reinforced Concrete Frame Subjected to Horizontal and Vertical Loading", Dept. of Civil Engineering and Applied Mechanics, McGill Univ., Montreal, Report No. 70-4, Sept. 1970.
2. Amarasekera, A. M. N., "Limit Design of Reinforced Concrete Skeletal Structures", Ph.D. Thesis, Univ. of London, 1966.
3. Aoyama, H., "Restoring Force Characteristics and Earthquake Response of Concrete Building Structures", Seminar Under the Japan-U. S. Cooperative Science Program, Construction and Behavior of Pre-cast Concrete Structures, Seattle, Aug. 23-27, 1971 (Reports by Japanese participants, Part II, p. 231).
4. Aoyama, H., Toneo, E., and Minami, T., "Behavior of Reinforced Concrete Frames Subjected to Reversal of Horizontal Forces", Proc. Japan Earthquake Engineering Symposium, Oct. 1966, pp. 315-320.
5. Aoyama, H. and Sugano, T., "A Generalized Inelastic Analysis of Reinforced Concrete Structures Based on the Tests of Members", Recent Researches of Structural Mechanics, Uno Shoten, 1968.
6. Aoyama, H., Ito, M., Sugano, S., and Nakata, S., "A Study on the Cause of Damage to the Hachinohe Technical College Due to 1968 Tokachi-Oki Earthquake (Part I)", Proceedings of U. S.-Japan Seminar on Earthquake Engineering with Emphasis on the Safety of School Buildings, Sendai, Japan, 21-26 September 1970, Japan Earthquake Engineering Promotion Society, pp. 199-212, (1971).
7. Aoyama, H., Osawa, Y., and Matsushita, K., "On the Earthquake Resisting Capacity of Reinforced Concrete School Buildings Subjected to 1968 Tokachi-Oki Earthquake", Proc. U. S.-Japan Seminar on Earthquake Engineering with Emphasis on the Safety of School Buildings, Sendai, Japan, 21-26 Sept. 1970, Japan Earthquake Engineering Promotion Society, pp. 190-198.
8. Ariaratnam, S. T., "The Collapse Load of Elastic-Plastic Structures", Ph.D. Dissertation, Cambridge Univ., 1959.
9. Arnold, P., Adams, P. F., and Lu, L., "The Effect of Instability on the Cyclic Behavior of a Frame", RILEM, International Symposium on the Effects of Repeated Loadings of Materials and Structural Elements, Mexico City, 15-17 Sept. 1966.
10. Ayre, R. S. and Mays, J. R., "Transient Dynamic Response of Some Nonlinear Structural Systems", Int. Journ. Computers and Structures, Vol. 1, No. 4, Dec. 1971, pp. 511-534.

11. Baker, A. L. L., "Ultimate Load Theory Applied to the Design of Reinforced and Prestressed Concrete Frames", Concrete Publications, Limited, London, 1956.
12. Baker, A. L. L., "Ultimate Load Theory for Concrete Frame Analysis", Journ. Struct. Div., ASCE, Vol. 85, ST.9, Nov. 1959, pp. 1-29.
13. Baker, A. L. L. and Amarakone, A. M. N., "Inelastic Hyperstatic Frame Analysis", Proc. Int. Symposium on Flexural Mechanics of Reinforced Concrete, Miami, Florida, Nov. 10-12, 1964, ASCE-ACI Publ, SP-12 (1965), pp. 85-142.
14. Berg, G. V., "Analysis of Structural Response to Earthquake Forces", Univ. of Michigan, Engineering College Industry Program, Report IP-291, May 1958.
15. Berg, G. V. and Thomaidis, S. S., "Energy Consumption by Structures in Strong Motion Earthquakes", Proc. Second World Conference on Earthquake Engineering, Tokyo, Japan, 1960, pp. 681-698.
16. Berg, O. Y., "Investigation of Strength of Reinforced Concrete Structures Subjected to Repeated Loading", Studies of Reinforced Concrete Bridge Structures, Trudy VNIITS, Moscow, 1956.
17. Bertero, V. V., "Effects of Variable Repeated Loading on Structures, A Review", Univ. of California, Berkeley, July 1966.
18. Bertero, V. V., "Experimental Studies Concerning Reinforced, Prestressed and Partially Prestressed Concrete Structures and Their Elements", Introductory Report for Theme IV, IABSE Symposium on Resistance and Ultimate Deformability of Structures Acted on by Repeated Forces, Lisbon, September 1973.
19. Bertero, V. V. and Bresler, B., "Seismic Behavior of Reinforced Concrete Framed Structures", Proc. Fourth World Conference on Earthquake Engineering, Santiago de Chile, 13-18 January 1969, Vol. I, Session B2, Chilean Association of Seismology and Earthquake Engineering (1969), pp. 109-124.
20. Bertero, V. V. and McClure, G. S., "Behavior of Reinforced Concrete Frames Subjected to Repeated Reversible Loads", Journ. ACI, Vol. 61, No. 10, Oct. 1964, pp. 1305-1330.
21. Bertero, V. V., McClure, G., and Popov, E. P., "Behavior of Reinforced Concrete Frames Subjected to Repeated Reversible Loads", Univ. of Calif., Berkeley, Dept. of Civil Engineering, Structures and Materials Research, Series 100, Issue 18, Jan. 1962.
22. Borges, J. F. and Arantes E. Oliveira, E. R., "Nonlinear Analysis of Reinforced Concrete Structures", Publ. IABSE, Vol. 23, 1963, pp. 51-70.

23. Blacketter, D. O., "Response of Nonlinear Structures to Blast, Final Report", Dept. Aerospace and Mechanical Eng'g., DAAD05-68-C-0129, Nov. 1968.
24. Borges, F. J., Arga, J. e Lima, Teixeira Coelho, A., and Monteiro, V., "Analytical Results Concerning the Nonlinear Behavior of Reinforced Concrete Structure", C.E.B. Bulletin No. 53, 1964.
25. Chandrasekaran, A. R. and Saini, S. S., "Live Load Effect on Dynamic Response of Structures", Journ. Struct. Div., ASCE, Vol. 95, ST.4, April 1969, pp. 649-660.
26. Cohn, M. Z., "Limit-Design for Redundant Reinforced Concrete Structures", Journ. ACI, Bibliographies, Vol. 58, No. 5, Nov. 1961, pp. 639-648.
27. Cohn, M. Z., "Limit-Design Solutions for Concrete Structures", Journ. Struct. Div., ASCE, Vol. 93, ST.1, Feb. 1967, pp. 37-57.
28. Cohn, M. Z., "Limit Design of Reinforced Concrete Frames", Journ of Struct. Div., ASCE, Vol. 94, ST.10, Oct. 1968, pp. 2467-2483.
29. Conner, H. W., Kaar, P. H., and Corley, W. G., "Moment Redistribution in Precast Concrete Frame", Journ. Struct. Div., ASCE, Vol. 96, ST.3, Mar. 1970, pp. 637-661.
30. Cranston, W. B., "Tests on Reinforced Concrete Frames", Cement and Concrete Association, Technical Report TRA/392, Aug. 1965.
31. DeDonato, O. and Maier, G., "Mathematical Programming Methods for the Inelastic Analysis of Reinforced Frames Allowing for Limited Rotation Capacity", Int. Journ. Num. Methods Eng'g, Vol. 4, No. 3, May-June 1972, pp. 307-329.
32. Diaz de Cossio, R. and Rosenblueth, E., "Reinforced Concrete Failures During Earthquakes", Journ. ACI, Vol. 58, No. 5, Nov. 1961, pp. 571-590.
33. Eppink, R. T. and Veletsos, A. S., "Analysis of Circular Arches", Tech. Report AFSWC-TR-59-9, Vol. II, July 1959, Kirtland AFB, New Mexico.
34. Eppink, R. T. and Veletsos, A. S., "Dynamic Analysis of Circular Elastic Arches", ASCE 2nd Conference on Elect. Comp., 1960, Reno, Nev., pp. 477-502.
35. Emst, G. C. and Riveland, A. R., "Ultimate Loads and Deflections from Limit Design of Continuous Structural Concrete", Journ. ACI, Vol. 56, No. 4, Oct. 1959, pp. 273-286.

36. Ernst, G. G., Smith, G. M., Riveland, A. R., and Pierce, D. N., "Basic Reinforced Concrete Frame Performance Under Vertical and Lateral Loads", Journ. ACI, Vol. 70, No. 4, April 1973, pp. 261-269.
37. Everard, K. A., "Moment Redistribution in Statically Indeterminate Structures Due to the Inelastic Effects in Steel and Concrete", Ph.D. Thesis, London Univ., 1952.
38. Franciosi, V., Augusti, G., and Sparacio, R., "Collapse of Arches Under Repeated Loading", Journ. of Struc. Div., ASCE, Vol. 90, ST.1, Feb. 1964, pp. 165-201.
39. Franklin, H. A., "Nonlinear Analysis of Reinforced Concrete Frames and Panels", Ph.D. Dissertation, Univ. of Calif., Berkeley, March 1970.
40. Fukumoto and Yoshida, "Failure of Arches Under Variable Repeated Loading", Publ. IABSE, Vol. 30, No. 1, 1970, pp. 15-40.
41. Goldberg, J. E. and Richard, R. M., "Analysis of Nonlinear Structures", Journ. Struct. Div., ASCE, Vol. 89, ST.4, August 1963, pp. 333-351.
42. Grierson, D. E. and Gladwell, G. M. L., "Collapse Load Analysis Using Linear Programming", Journ. Struc. Div., ASCE, Vol. 97, ST.5, Paper 8127, May 1971, pp. 1561-1573.
43. Gulkan, P. and Sozen, M. A., "Response and Energy-Dissipation of Reinforced Concrete Frames Subjected to Strong Base Motions", Univ. of Illinois, Structural Research Series No. 377, May 1971.
44. Gupchup, V. N., "Nonlinear Response of Two-Hinged Circular Reinforced Concrete Arches to Static and Dynamic Loads", D.Sc. Thesis, Massachusetts Inst. of Technology, 1963.
45. Gupchup, V. N. and Biggs, J. M., "Dynamic Nonlinear Response of Reinforced Concrete Arches", Journ. Struct. Div., ASCE, Vol. 89, ST.4, Aug. 1963, pp. 225-248.
46. Hanson, N. W., "Seismic Resistance of Concrete Frames with Grade 60 Reinforcement", Journ. Struct. Div., ASCE, Vol. 97, ST.6, June 1971, pp. 1685-1700.
47. Horne, M. R., "Effect of Variable Repeated Loads in Building Structures Designed by Plastic Theory", Publication IABSE, Vol. 14, 1954, p. 53-74.
48. Housner, G. W., "Limit Design of Structures to Resist Earthquakes", Proc. World Conference on Earthquake Engineering, Univ. of California, Berkeley.

49. Housner, G. W., "Behavior of Structures During Earthquakes", Journ. EM Div., ASCE, Vol. 85, EM4, Paper 2220, Oct. 1959, pp. 109-129.
50. Housner, G. W., "The Plastic Failure of Frames During Earthquakes", Proc. Second World Conf. on Earthquake Engineering, Tokyo, 1960, Vol. 2, p. 997.
51. Husid, R., "Gravity Effects on the Earthquake Response of Yielding Structures", Earthquake Engineering Research Lab., California Institute of Tech., Pasadena, June 1967.
52. Iwan, W. D., "Response of Multi-degree of Freedom Yielding Systems", Journ. EM Div., ASCE, Vol. 94, EM2, April 1968, pp. 421-437.
53. Jacobsen, L. S., "Dynamic Behavior of Simplified Structures Up to the Point of Collapse", Proceedings of the Symposium on Earthquake and Blast Effects on Structures, Los Angeles, 1952, pp. 112-113.
54. Jain, O. P., "Ultimate Strength of Reinforced Concrete Arches", Journ. ACI, Vol. 57, No. 6, Dec. 1960, pp. 697-714.
55. Jennings, P. C. and Husid, R., "Collapse of Yielding Structures During Earthquakes", Journ. EM Div., ASCE, Vol. 94, EM5, Oct. 1968, pp. 1045-1065.
56. Kabaila, A. P., "Collapse of Mechanisms with Moment-Resisting Hinges of Non-linear Moment-Deformation Characteristics", Proc. Int. Conf. on Structure, Solid Mechanics and Engineering Design in Civil Engineering Materials, Southampton, England, April 1969, Sponsor: Univ. of Southampton, RILEM and the Concrete Society, pp. 1263-1267, (ed.) Te'eni, M.
57. Kartsvadze, G. N. and Avalishvili, L. N., "Research on Behavior of Reinforced Concrete Constructions Under the Effect of Seismic Load", Proc. Fourth World Conference on Earthquake Engineering, Santiago de Chile, 13-18 January 1969, Vol. I, Session B2, Chilean Association of Seismology and Earthquake Engineering (1969), pp. 153-163.
58. Kharchenko, T. G. and Tokareva, O. M., "Simulation of Frame Structures with Allowance for Physical Nonlinearity", Akademiia Nauk Ukrains'koi, RSR, Dopovid, Seriya A - Fiziko - Tekhnichni I Matematichni Nauki, Vol. 33, pp. 272-275 (in Ukrainian).
59. Kooharian, A., "Limit Analysis of Voussoir (Segmental) and Concrete Arches", Journ. of ACI, Vol. 24, Dec. 1952, pp. 317-328.
60. Krishnamoorthy, C. S. and Yu, C. W., "Simplified Computer Approach to the Ultimate Load Analysis and Design of Reinforced Concrete Frames", Journ. ACI, Vol. 69, No. 11, Nov. 1972, pp. 690-698.

61. Lazaro, A. L., III, "Analysis of the Full-Range Behavior of Reinforced Concrete Beams and Frames", Ph.D. Thesis, Princeton Univ., 1971.
62. Lazaro, A. L., III, and Richards, R., Jr., "Full-Range Analysis of Concrete Frames", Journ. Struct. Div., ASCE, Vol. 99, ST.8, Aug. 1973, pp. 1761-1783.
63. Lind, N. C., "Response Limits for a Class of Nonlinear Systems", Journ. EM Div., ASCE, Vol. 94, EM1, Feb. 1968, pp. 23-30.
64. Lionberger, S. R. and Weaver, W., "Dynamic Response of Frames with Non-Rigid Connections", Journ. EM Div., ASCE, Vol. 95, EM1, Feb. 1969, pp. 95-114.
65. Maier, G., "On Structural Instability due to Strain-Sofening", Proc. Symposium on Instability of Continuous Systems, IUTAM, Karlsruhe, 1969.
66. Mahin, S. A. and Bertero, V. V., "Nonlinear Seismic Response Evaluation-Charaima Building", Journ. Struct. Div., ASCE, Vol. 100, ST.6, June 1974, pp. 1225-1242.
67. Meyer, J. D., and Gerstle, K. H., "Shakedown of Strain-Hardening Structures", Journ. Struct. Div., ASCE, Vol. 98, ST.1, Jan. 1972, pp. 95-110.
68. Mora, L. E., "A Study of Compatibility of Rotations and Sequence of Plastic Hinge Formation in Reinforced Concrete Ultimate Load Theory", Ph.D. Thesis, Rensselaer Polytechnic Institute, 1965.
69. Moss-Morris, A., "An Investigation into the Factors Affecting the Collapse Loads of Reinforced Concrete Frames", Ph.D. Thesis, London Univ., 1954.
70. Munro, J., "The Elastic and Limit Analysis of Planar Skeletal Structures", Civil Engineering and Public Works Review, Vol. 60, No. 706, May 1965, pp. 671-677.
71. Murray, N. W., "The Determination of the Collapse Loads of Rigidly Jointed Frameworks with Members in which Axial Forces are Large", Proc. Institution of Civil Engineers, Part III, Vol. 5, No. 1, April 1956, pp. 213-232.
72. Nakagawa, K. and Hirose, M., "Experimental Results of an Actual Six Storied Reinforced Concrete Frame", Building Research Institute, Tokyo, Japan, 1965.
73. Neal, B. G. and Symonds, P. S., "Cyclic Loading of Portal Frames-Theory and Tests", Publication IABSE, Vol. 18, 1958, pp. 171-199.

74. Ni, Chi-Mon, and Lee, L. N. H., "Finite Earthquake Response of Inelastic Structures", Journ. EM Div., ASCE, Vol. 98, EM6, Dec. 1972, pp. 1529-1546.
75. Nigam, N. C., "Inelastic Interactions in the Dynamic Response of Structures", Earthquake Engineering Research Lab., Calif. Inst. of Tech., Pasadena, June 1968.
76. Nigam, N. C., "Yielding in Framed Structures Under Dynamic Loads", Journ. EM Div., ASCE, Vol. 96, EM5, Oct. 1970, pp. 687-709.
77. Ogawa, J., "Dynamic Behavior of Reinforced Concrete Frames", Bulletin of the Tohoku Institute of Technology, Vol. 3, 1967.
78. Otani, S. and Sozen, M. A., "Behavior of Multistory Reinforced Concrete Frames During Earthquakes", Univ. of Illinois, Civil Engineering Studies, Structural Research Series No. 392, Nov. 1972.
79. Otani, S. and Sozen, M. A., "Simulated Earthquake Tests on Reinforced Concrete Frames", Journ. Struct. Div., ASCE, Vol. 100, ST.3, Mar. 1974, pp. 687-701.
80. Otani, S., "Inelastic Analysis of Reinforced Concrete Frame Structures", Journ. of Struct. Div., ASCE, Vol. 100, ST.7, July 1974, pp. 1433-1449.
81. Park, R., "Theorization of Structural Behavior with a View to Defining Resistance and Ultimate Deformability", Introductory Report for Theme I, IABSE Symposium on Resistance and Ultimate Deformability of Structures Acted on by Repeated Forces, Lisbon, Sept. 1972.
82. Park, R., "Ductility of Reinforced Concrete Frames Under Seismic Loading", New Zealand Engineering, Vol. 23, No. 11, Nov. 1968, pp. 427-435.
83. Pfrang, C. O. and Siess, C. P., "Predicting Structural Behavior Analytically", Journ. Struct. Div., ASCE, Vol. 90, ST.5, Oct. 1964, pp. 99-111.
84. Popescu, "Plastic Joints in Statically Indeterminate Concrete Frames", (in French) *Revue Roumaine de Sciences Techniques, Serie de Mecanique Applique*, Vol. 14, No. 4, 1969, p. 819.
85. Ohno, K. and Shibata, T., "A Consideration on the Damages to Columns of Reinforced Concrete by the Tokachioki Earthquake, 1968", Proc. U. S.-Japan Seminar on Earthquake Engineering with Emphasis on the Safety of School Buildings, Sendai, Japan, 21-26 September 1970, Japan Earthquake Engineering Promotion Society (1971), pp. 152-155.
86. Ohsaki, Y., Watabe, M., and Matsushima, Y., "Experimental Study on Five-Story Full Size Apartment House of Reinforced Concrete Walled Frames", Proc. U. S.-Japan Seminar on Earthquake Engineering with Emphasis on the Safety of School Buildings, Sendai, Japan, 21-26 September 1970, Japan Earthquake Engineering Promotion Society (1971),

pp. 240-266.

87. Palmer, B. E., "The Ultimate Strength of Reinforced Concrete Space Frames", Ph.D. Thesis, Univ. of London.
88. Rao, P. S., "Basic Laws Governing the moment Redistribution in Statically Indeterminate Reinforced Concrete Structures", Deutscher Ausschuss für Stahlbeton, Berlin, Bulletin No. 177, 1966, p. 99.
89. Read, J. B., "Testing to Destruction of Full-Size Portal Frames", Cement and Concrete Association, Technical Report TRA/390, Aug. 1965.
90. Richards, R. and Lazaro, A. L., "Limit Analysis of a Reinforced Concrete Frame", Journ. ACI, Vol. 68, No. 10, Oct. 1971, pp. 748-755.
91. Ridha, R. A., and Lee, L. H. N., "Inelastic Finite Deformations of Planar Frames", Journ. Em Div., ASCE, Vol. 97, EM3, Paper 8198, June 1971, pp. 773-789.
92. Romstad, K. M., Hutchinson, J. R., and Runge, K. H., "Design Parameter Variation and Structural Response", Int. Journ. Num. Methods Eng'g, Vol. 5, No. 3, Jan-Feb 1973, pp. 337-349.
93. Rosenblueth, E. and Diaz de Cossio, R., "Instability Considerations in Limit Design of Concrete Frames", Proc. Int. Symposium on Flexural Mechanics of Reinforced Concrete, Miami, Florida, Nov. 10-12, 1964, ASCE-ACI Publ. SP-12 (1965), pp. 439-456.
94. Sabnis, G. M. and White, R. N., "Behavior of Reinforced Concrete Frames Under Cyclic Loads Using Small Scale Models", Journ. ACI, Vol. 66, No. 9, Sept. 1969, pp. 703-715.
95. Sader, W. H., "Ultimate Strength of Single Bay One Storey Reinforced Concrete Frames Subjected to Horizontal and Vertical Loading", M. Eng. Thesis, Dept. of Civil Engineering, McGill Univ., Montreal, Aug. 1967.
96. Sanchez, E., "Behavior of Reinforced Concrete Frames Subjected to Repeated Reversible Loads", Univ. of Calif., Berkeley, Graduate Student Research Report, Jan. 1960.
97. Shah, I. K., "Nonlinear Dynamic Response of Reinforced Concrete Circular Arches", M.I.T. School of Engineering, Document R64-6 AD-602045 NBY-32227, Jan. 1964.
98. Shaikh, M. F., Mirza, M. S., and McCutcheon, J. O., "Limit Analysis of Reinforced Concrete Frames", Transactions, Engineering Institute of Canada, Vol. 14, No. A-6, July 1971, I-VII.

99. Shiga, T. and Ogawa, Y., "An Experimental Study on Dynamical Behavior of Reinforced Concrete Frames", Proc. of Japan Earthquake Engineering Symposium, Oct. 1966, pp. 321-326.
100. Shiga, T. and Ogawa, J., "The Experimental Study on the Dynamic Behavior of Reinforced Concrete Frames", Proc. Fourth World Conference on Earthquake Engineering, Santiago de Chile, 13-18 Jan. 1969, Vol. 1, Session B2, Chilean Association on Seismology and Earthquake Engineering, (1969), pp. 165-176.
101. Shiga, T., Ogawa, J., Shibata, A., Shibuya, J., "The Dynamic Properties of Reinforced Concrete Frames", Proc. U. S.-Japan Seminar on Earthquake Engineering with Emphasis on the Safety of School Buildings, Sendai, Japan, 21-26 Sept. 1970, Japan Earthquake Engineering Promotion Society, (1971), pp. 346-363.
102. Shinzuka, M., "On the Maximum Dynamic Response of Structures", Jet Propulsion Lab, SPS37-61, Vol. III.
103. Shinosuka, M., "Maximum Structural Response to Seismic Excitations", Journ. EM Div., ASCE, Vol. 96, EM5, Oct. 1970, pp. 729-738.
104. Sozen, M. A. and Nielsen, "Earthquake Resistance of Reinforced Concrete Frames", Proc. RILEM Int. Symposium on the Effects of Repeated Loading of Materials and Structures Elements. Mexico City, 15-17 Sept. 1966.
105. Sun, C. K., "Gravity Effect on the Dynamic Stability of Inelastic Systems", Ph.D. Dissertation, Univ. of Michigan, Ann Arbor, Mich., 1971.
106. Sun, Chang-Kuei, Berg, G. V., and Hanson, R. D., "Gravity Effect on Single Degree Inelastic System", Journ. EM Div., ASCE, Vol. 99, EM1, Feb. 1973, pp. 183-200.
107. Thomaidis, S. S., "Earthquake Response of Systems with Bilinear Hysteresis", Journ. Struct. Div., ASCE, Vol. 90, ST.4, Aug. 1964, pp. 123-143.
108. Toridis, T. G., "Inelastic Deformations of Space Frames Subjected to Dynamic Loads", ACCE Louisville National Structural Eng'g Meeting, April 1969.
109. Toridis, T. and Khozeimeh, K., "Inelastic Response of Frames to Dynamic Loads", Journ. EM Div., ASCE, Vol. 97, EM3, June 1971, pp. 847-863.
110. Umemura, H. and Aoyama, H., "Evaluation of Inelastic Seismic Deflection of Reinforced Concrete Frames Based on the Tests of Members", Proc. Fourth World Conference on Earthquake Engineering, Santiago de Chile,

13-18 Jan. 1969, Vol. 1, Session B2, Chilean Association on Seismology and Earthquake Engineering (1969), pp. 91-107.

- 111. Venkatesan, M. S., "The Inelastic Response of Structures for Various Histories of Loading", Ph.D. Thesis, Univ. of California, Berkeley, June 1967.
- 112. Wallace, D. B. and Seireg, A., "A Finite Element Based Procedure for Simulating the Transient Response and Failure of a Two-Dimensional Continuum with Nonlinear Material Characteristics", ASME Winter Annual Meeting, New York, Nov. 26-30, 1972.
- 113. Walpole, W. R. and Shepherd, R., "Elasto-Plastic Seismic Response of Reinforced Concrete Frames", Journ. of Struct. Div., ASCE, Vol. 95, ST.10, Oct. 1969, pp. 2031-2055.
- 114. Wilby, C. B., "Inelastic Behavior of Reinforced Concrete Single Bay Portal Frames", Civil Engineering and Public Works Rev., Vol. 62, No. 728, Mar. 1967, pp. 331-336.
- 115. Winter, G., "Properties of Steel and Concrete and the Behavior of Structures", Journ. Struct. Div., ASCE, Vol. 86, ST.2, Feb. 1960, pp. 33-61.

C.4 SOLUTION PROCESS

1. Ang, A. H. S., "Analysis of Frames with Nonlinear Behavior," Journal of EM Div., ASCE, Vol. 86, EM 3, June 1960, pp. 1-23.
2. Argyris, J. H. and Chan, A. S. L., "Applications of Finite Elements in Space and Time," Ingenieur-Archiv, Vol. 41, No. 4, 1972, pp. 235-257.
3. Armen, H., Isakson, G., and Pifko, A., "Discrete Element Methods for the Plastic Analysis of Structures Subjected to Cyclic Loading," Int. Journ. Num. Methods Eng'g, Vol. 2, No. 2, April-June 1970, pp. 189-206.
4. Bard, Y., "On a Numerical Instability of Davidon-like Methods," Math. Comp., Vol. 22, No. 103, July 1968, pp. 665-666.
5. Bergan, P. G. and Soreide, T., "A Comparative Study of Different Numerical Solution Techniques as Applied to a Nonlinear Structural Problem," Computer Methods in Applied Mech. and Eng'g, Vol. 2, No. 2, May 1973, pp. 185-201.
6. Bogner, F. K., Mallett, R. H., Minich, M. D., and Schmit, L. A., "Development and Evaluation of Energy Search Methods of Non-linear Structural Analysis," AFFDL-TR-65-113, WPAFB, Dayton, Ohio, Air Force Flight Dynamics Lab, October 1965.
7. Bromberg, N. S., "Maximization and Minimization of Complicated Multivariable Functions," Communication and Electronics, AIEE, No. 58, Jan. 1962, pp. 725-730.
8. Brooks, S. H., "A Comparison of Maximum Seeking Methods," Journ. of Operations Research Society of America, Vol. 7, No. 4, July-Aug. 1959, pp. 430-457.
9. Broyden, C. G., "Quasi-Newton Methods and Their Application to Function Minimization," Mathematics of Computation, Vol. 21, No. 99, July 1967, pp. 368-381.
10. Case Western Reserve Univ., Division of SMSMD, "Developments in Discrete Element Finite Deflection Structural Analysis by Function Minimization," Tech. Report AFFDL-TP-68-126, Air Force Structural Dynamics Lab, September 1968.
11. Cranston, W. B. and Chatterji, A. K., "Computer Analyses of Reinforced Concrete Portal Frames with Fixed Feet," Cement and Concrete Association, Technical Report, TRA-444, Sept. 1970.
12. Crockett, J. B. and Chernoff, H., "Gradient Methods of Maximization," Pacific Journ. Math. Vol. 5, 1955, pp. 33-50.

13. Curry, H. B., "The Method of Steepest Descent for Nonlinear Minimization Problems," Quarterly Applied Math., Vol. 2, No. 3, Oct. 1944, pp. 258-261.
14. Davidon, W. C., "Variable Metric Method for Minimization," U.S. Atomic Energy Commission, Argonne National Lab., R. & D. Report, ANL-5990 (rev.) 1969.
15. Deprez, M. G., "Computer Analysis of Concrete Frames in Nonlinear Region," (French) Comité Européen du Béton, Bulletin No. 53, Jan. 1966.
16. Fletcher, R., "Function Minimization Without Evaluating Derivatives - A Review," The Computer Journ., Vol. 8, April 1965-Jan. 1966, pp. 33-41.
17. Fletcher, R., Powell, M. J.D., "A Rapidly Convergent Descent Method for Minimization," The Computer Journal, Vol. 6, No. 2, July 1963, pp. 163-168.
18. Fletcher, R. and Reeves, C. M., "Function Minimization by Conjugate Gradients," The Computer Journ., Vol. 7, April 1964-Jan. 1965, pp. 149-154.
19. Fox, R. L., "An Integrated Approach to Engineering Synthesis and Analysis," Ph.D. Dissertation, Case Institute of Technology, 1965.
20. Fox, R. L. and Kapoor, M. P., "A Minimization Method for the Solution of the Eigenproblem Arising in Structural Dynamics," Proc. Second Conference on Matrix Methods in Structural Mechanics, WPAFB, Ohio, AFDL-TR-68-150, October 1968, pp. 271-305.
21. Fox, R. L., and Stanton, E. L., "Developments in Structural Analysis by Direct Energy Minimization," AIAA Journ., Vol. 6, No. 6, June 1968, pp. 1036-1042.
22. Fried, I., "Gradient Methods for Finite Element Eigenproblems," AIAA Journ. Tech. Note, Vol. 7, No. 4, April 1969, pp. 739-741.
23. Fried, I., "More on Gradient Iterative Methods in Finite Element Analysis," AIAA Journ., Technical Notes, Vol. 7, No. 3, March 1969, pp. 565-567.
24. Goudreau, G. L. and Taylor, R. L., "Evaluation of Numerical Integration Methods in Elastodynamics," Computer Methods in Applied Mech. and Eng'g, Vol. 2, No. 1, Feb. 1973, pp. 69-97.
25. Haisler, W. E., Stebbins, F. J. and Stricklin, J. A., "Development and Evaluation of Solution Procedures for Geometrically Nonlinear Structural Analysis by the Direct Stiffness Method," AIAA, ASME Structures, Structural Dynamics and Materials Conference, 12th, Anaheim, Calif., April 19-21, 1971.

26. Hayes, C. O., "A Nonlinear Analysis of Statically Loaded Plane Frames Using a Discrete Element Model," Ph.D. Thesis, University of Texas, Austin, 1971.
27. Hayes, C. O. and Matlock, H., "A Nonlinear Analysis of Plane Frames Using a Discrete Element Model," Center for Highway Research, Univ. of Texas, Austin, Research Report 56-23, Sept. 1971.
28. Hayes, C. O. and Matlock, H., "Nonlinear Discrete Element Analysis of Frames," Journ. Struct. Div., ASCE, Vol. 99, ST10, Oct. 1973, pp. 2011-2030.
29. Iverson, J. K., "Dynamic Analysis of Nonlinear Elastic Frames," Ph.D. Thesis, Michigan State Univ., 1968.
30. Jennings, A. and Majid, K., "An Elastic-Plastic Analysis by Computer for Framed Structures Loaded up to Collapse," The Structural Engineer, Vol. 43, No. 12, Dec. 1965, pp. 407-412.
31. Key, S. M., "A Convergence Investigation of the Direct Stiffness Method," Ph.D. Thesis, University of Washington, Seattle, 1966.
32. Lai, Ying-San and Achenbach, J. D., "Direct Search Optimization Method," Journ. Struct. Div., ASCE, Vol. 99, ST1, Jan. 1973, pp. 19-31.
33. Laursen, H. I., Shubinski, R. P. and Clough, R. W., "Dynamic Matrix Analysis of Frame Structures," Proc. Fourth U. S. National Congress of Applied Mechanics, ASME, Vol. 1, 1962, pp. 99-105.
34. Levy, S. and Kroll, W. D., "Errors Introduced by Step-by-Step Integration of Dynamic Response," National Bureau of Standards, Report, February, 1951.
35. Maier, G., "A Quadratic Programming Approach for Certain Nonlinear Structural Problems," Meccanica, Vol. 3, 1968, pp. 121-130.
36. Mallett, R. H. and Schmit, L. A., "Non-linear Structural Analysis by Energy Search," Journ. Structural Div., ASCE, Vol. 93, ST3, Paper 5285, June 1967, pp. 221-234.
37. Mallett, R. H. and Marcal, P. V., "Finite Element Analysis of Non-linear Structures," Journ. Struct. Div., ASCE, Vol. 94, ST9, Sept. 1968, pp. 2081-2105.
38. Marcal, P. V., "Finite Element Analysis of Combined Problems of Nonlinear Material and Geometric Behavior," Proc. ASME Joint Comput. Conf. Comput. Approach in Applied Mechanics, Chicago, 1969.
39. Massett, D. A. and Stricklin, J. A., "Self-Correcting Incremental Approach in Nonlinear Structural Mechanics," AIAA Journ., Tech. Note, Vol. 9, No. 12, Dec. 1971, pp. 2464-2466.

40. McNamara, J. F., "Incremental Stiffness Method for Finite Element Analysis of the Nonlinear Dynamic Problem," Ph.D. Thesis, Brown University, August 1971.
41. McNamara, J. F. and Marcal, P. V., "Incremental Stiffness Method for Finite Element Analysis of the Nonlinear Dynamic Problem," Proc. of Conf. on Numerical and Computer Methods in Structural Mechanics, Univ. of Ill., Urbana, Sept. 8-10, 1971, Off. of Naval Res., ed., Fenves, Perrone, Robinson, Schnobrich, 1973, pp. 353-376.
42. Melosh, R. J. and Kelley, D. M., "Prediction of Nonlinear Transient Response of Structures," ASME-AIAA 10th Structures, Structural Dynamics & Materials Conference, April 14-16, 1969, New Orleans, La.
43. Newmark, N. M., "Computation of Dynamic Structural Response in the Range Approaching Failure," Proc. Symposium on Earthquake and Blast Effects on Structures, Earthquake Engineering Research Institute, Los Angeles, 1952.
44. Newmark, N. M., "A Method of Computation for Structural Dynamics," Journ. EM Div., ASCE, Vol. 85, EM3, July 1959, pp. 67-94.
45. Nickell, R. E., "A Survey of Direct Integration Methods in Structural Dynamics," Division of Engineering, Brown Univ., Doc. N00014-67-A-0191-0007, April, 1972.
46. Pearson, J. D., "On Variable Metric Methods of Minimization," Research Analysis Corporation Technical Paper, McLean, Virginia, RAC-TP-302, 1968.
47. Pironthin, S. D., "Incremental Large Deflection Analysis of Elastic Structures," Ph.D. Thesis, Dept. of Aeronautics and Astronautics, MIT, 1971.
48. Poskitt, T. J., "Numerical Solution of Nonlinear Structures," Journ. Struct. Div., ASCE, Vol. 93, ST4, Aug. 1967, pp. 69-94.
49. Powell, M. J. D., "An Iterative Method for Finding the Stationary Values of a Function of Several Variables," The Computer Journ., Vol. 5, April 1962-Jan. 1963, pp. 147-151.
50. Powell, M. J. D., "An Efficient Method for Finding the Minimum of a Function of Several Variables Without Calculating Derivatives," The Computer Journ., Vol. 7, April 1964-Jan. 1965, pp. 155-162.
51. Powell, M. J. D., "A Survey of Numerical Methods for Unconstrained Optimization," SIAM Review, Vol. 12, No. 1, Jan. 1970, pp. 79-97.
52. Richard, R. M. and Blacklock, J. R., "Finite Element Analysis of Inelastic Structures," AIAA Journ., Vol. 7, No. 3, March 1969, p. 432-438.

53. Schmit, L. A. and Minich, M. O., "An Energy Search Method for Nonlinear Structural Analysis," Case Institute of Technology, EDC Report 2-64-5, January 1964.
54. Shah, B. V., Buehler, R. J., and Kempthorne, O., "Some Algorithms for Minimizing a Function of Several Variables," Journ. SIAM, Vol. 12, No. 1, March 1964, pp. 74-92.
55. Spang, H. A., "A Review of Minimization Techniques for Nonlinear Functions," SIAM Review., Vol. 4, No. 4, Oct 1962, pp. 343-365.
56. Stewart, G. W., "A Modification of Davidon's Minimization Method to Accept Difference Approximations of Derivatives," Journ. Assoc. Comp. Machinery, Vol. 14, No. 1, January 1967, pp. 72-83.
57. Straster, T. A., "A Comparison of Gradient Dependent Techniques for the Minimization of an Unconstrained Function of Several Variables," AIAA Aerospace Computer Systems Conference, Los Angeles, September 8-10, 1969, AIAA Paper No. 69-951.
58. Stricklin, J. A., Haisler, W. E. and Von Riesenmann, W. A., "Geometrically Nonlinear Structural Analysis by Direct Stiffness Method," Journ. Struct. Div., ASCE, Vol. 97, ST9, Sept. 1971, pp. 2299-2314.
59. Stricklin, J. A., Haisler, W. E., Von Riesenmann, W. A., "Evaluation of Solution Procedures for Material and/or Geometrically Non-linear Structural Analysis," AIAA Journ., Vol. 11, No. 3, March 1973, p. 292-299.
60. Symonds, P. S., "Survey of Methods of Analysis for Plastic Deformation of Structures Under Dynamic Loading," Brown University, Division of Engineering Technical Report: Office of Naval Research Contract Nonr 3248(01)(X), June, 1967.
61. Toridis, T. G. and Khozeimeh, K., "Computer Analysis of Rigid Frames," Int. Journ., Computers and Structures, Vol. 1, No. 1/2, Aug. 1971, pp. 193-221.
62. Wang, C. K., "General Computer Program for Limit Analysis," Journ. Struct. Div., ASCE, Vol. 89, ST6, Dec. 1963, pp. 101-117.
63. Wen R. K. and Farhoomand, F., "Dynamic Analysis of Inelastic Space Frames," Journ. EM Div., ASCE, Vol. 96, EM5, Oct. 1970, pp. 667-686.
64. Wen, R. K. and Janssenn, J. G., "Dynamic Analysis of Elasto-inelastic Frames," Proc. Third World Conf. on Earthquake Eng'g, Vol. II, New Zealand, 1965, pp. 713-729.
65. Wilson, E., "Matrix Analysis of Nonlinear Structures," ASCE Second Conference on Electronic Computation, Pittsburgh, Sept. 1960, pp. 415-428.

66. Wilson, E. L. and Clough, R. W., "Dynamic Response by Step-by-Step Matrix Analysis," Symposium on Use of Computers in Civil Engineering, Lisbon, Portugal, Oct., 1962.
67. Wu, R. W. H. and Witmer, E. A., "Finite Element Analysis of Large Elastic-Plastic Transient Deformations of Simple Structures," AIAA Journ., Vol. 9, No. 9, Sept. 1971, pp. 1719-1724.
68. Yamada, Y., "Incremental Formulation for Problems with Geometric and Material Nonlinearities," Advances in Computational Methods in Structural Mechanics and Design. Proc. Second U.S.-Japan Seminar, Berkeley, Calif., August 1972, pp. 325-355.
69. Young, J. W., "CRASH: A Computer Simulator of Nonlinear Transient Response of Structures," Automobile Manufacturers Association, National Highway Traffic Safety Administration, Final Report No. DOT-HS-901-125-B, Contract No. DOT-HS-091-1-125, March 1972.
70. Zangwill, W. I., "Minimizing a Function Without Calculating Derivatives," The Computer Journ., Vol. 10, No. 3, Nov. 1967, pp. 292-296.

C.5 SELECTED BOOKS

1. Blume, J. R., Newmark, N. M., and Corning, L. H., Design of Multi-Story Reinforced Concrete Buildings for Earthquake Motions. Portland Cement Association, 1961.
2. Considere, A., Experimental Researches on Reinforced Concrete, Tr. and arr. by Leon S. Moisseiff, McGraw Publishing Company, 1903.
3. Ferguson, P. M., Reinforced Concrete Fundamentals, second edition, John Wiley and Sons, Inc., 1965.
4. Freudenthal, A. M., The Inelastic Behavior of Engineering Materials and Structures, John Wiley and Sons, Inc., 1950.
5. Granholm, H., A General Flexural Theory of Reinforced Concrete, John Wiley and Sons, Inc., 1965.
6. Jaeger, J. C., Elasticity, Fracture, and Flow, Methven and Company, Ltd., London, 1969.
7. Lanczos, C., The Variational Principles of Mechanics, Fourth Edition, Univ. of Toronto Press, 1970.
8. Langhaar, H. L., Energy Methods In Applied Mechanics, John Wiley and Sons, Inc., 1962.
9. Livesley, R. K., Matrix Methods of Structural Analysis, Pergamon Press, 1964.
10. Neville, A. M., Properties of Concrete, John Wiley and Sons, Inc., (Isaac E. Egan, London), 1963.
11. Neville, A. M., Hardened Concrete: Physical and Mechanical Aspects, ACI Monograph No. 6, Iowa State Univ. Press, 1971.
12. Newmark, N. M. and Rosenblueth, E., Fundamentals of Earthquake Engineering, Prentice-Hall, Inc., 1971.
13. Novozhilov, V. V., Foundations of the Nonlinear Theory of Elasticity, Graylock Press, 1953.
14. Sandor, B. I., Fundamentals of Cyclic Stress and Strain, Univ. of Wisconsin Press, 1972.
15. Tichy, M. and Vorlieck, M., Statistical Theory of Concrete Structures with Special Reference to Ultimate Design, Irish University Press, Shannon Academia, Prague, 1972.

16. Wiegel, R. L., Earthquake Engineering, Prentice-Hall, Inc., 1970.
17. Zienkiewicz, O. C., The Finite Element Method in Engineering Science, McGraw-Hill Book Company, Inc., 1971.