

U.S. DEPARTMENT OF COMMERCE  
National Technical Information Service

AD-A025 337

THE EFFECTS OF WALL TEMPERATURE AND SUCTION  
ON LAMINAR BOUNDARY-LAYER STABILITY

RAND CORPORATION

PREPARED FOR  
DEFENSE ADVANCED RESEARCH PROJECTS AGENCY

APRIL 1976

AD A 0 2 5 3 3 7

166068

ARPA ORDER NO.: 189-1  
6G10 Tactical Technology

R-1863-ARPA

April 1976

---

# The Effects of Wall Temperature and Suction on Laminar Boundary- Layer Stability

William S. King

D D C  
RECEIVED  
JUL 10 1976  
D D C

---

A Report prepared for

DEFENSE ADVANCED RESEARCH PROJECTS AGENCY

REPRODUCED BY  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
U. S. DEPARTMENT OF COMMERCE  
SPRINGFIELD, VA. 22161



The research described in this Report was sponsored by the Defense Advanced Research Projects Agency under contract No. DAHC15-73-C-0161. Reports of The Rand Corporation do not necessarily reflect the opinions or policies of the sponsors of Rand research.

APPROVED BY	
NAME	UNIT/CONTROL <input checked="" type="checkbox"/>
DATE	DATE SIGNED <input type="checkbox"/>
QUALIFICATION	<input type="checkbox"/>
SUBJECTIVE	
BY	
PRINTED NAME AVAILABLE CITY STATES	
DATE	APPROVAL NO. OF COPIES
A	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER R-1863-ARP.	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) the Effects of Wall Temperature and Suction on Laminar Boundary-Layer Stability		5. TYPE OF REPORT & PERIOD COVERED Interim
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) William S. King		8. CONTRACT OR GRANT NUMBER(s) DAHC15-73-C-0181
9. PERFORMING ORGANIZATION NAME AND ADDRESS The Rand Corporation 1700 Main Street Santa Monica, Ca. 90406		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Advanced Research Projects Agency Department of Defense Arlington, Va. 22209		12. REPORT DATE April 1976
		13. NUMBER OF PAGES 25
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) No restrictions		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Laminar Boundary Layer Reynolds Number Underwater Vehicles Hydrodynamics Temperature		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) see reverse side		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

An integral solution of the two-dimensional boundary-layer equations for water with pressure gradient, heat transfer, and suction was employed to investigate laminar boundary-layer stability. It was shown that the effects of suction, wall heating, and pressure gradient on critical Reynolds numbers could be correlated as a function of universal boundary-layer parameters. It was indicated that suction is the most effective and pressure gradient the least effective means to stabilize a boundary layer. However, the effectiveness of suction is enhanced by a favorable pressure gradient. (Author)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

ARPA ORDER NO.: 189-1  
6G10 Tactical Technology

R-1863-ARPA  
April 1976

# The Effects of Wall Temperature and Suction on Laminar Boundary- Layer Stability

William S. King

A Report prepared for  
DEFENSE ADVANCED RESEARCH PROJECTS AGENCY

**Rand**  
SANTA MONICA, CA. 90406

PREFACE

The research discussed in this report was sponsored by the Defense Advanced Research Projects Agency and is intended to provide a simple analytical means of estimating the effects of wall boundary conditions on boundary-layer stability. Accuracy was not the primary concern of the study. However, emphasis was placed on isolating the critical boundary-layer parameters and providing some quantitative prediction of their effects on boundary-layer stability.

**MISSING PAGE  
NUMBERS ARE BLANK  
AND WERE NOT  
FILMED**



SUMMARY

An integral solution of the two-dimensional boundary-layer equations for water with pressure gradient, heat transfer, and suction was used to investigate laminar boundary-layer stability. There are theoretical bases to indicate that the effects of suction, wall heating, and pressure gradient on critical Reynolds numbers could be correlated as a function of universal boundary-layer parameters. Either the boundary-layer shape factor,  $H$ , or the parameter proposed by Wazzan,  $\bar{u}''(0)$ , could be used. These two parameters are not independent. The preference of one parameter over the other depends on the nature of the data to be correlated. There is apparently no preference for theoretical data, and  $H$  is preferable for experimental data because the displacement and momentum thicknesses are easier to deduce from measurements than the wall-shear parameters.

The results of the analysis are used for a qualitative discussion of the effects of suction, wall heating, and pressure gradient on boundary-layer stability. Suction is the most effective, and pressure gradient the least effective, means to stabilize a boundary layer. Further, the stabilizing effects of suction and wall heating are enhanced by a favorable pressure gradient. The application of this analysis to calculations of the critical Reynolds number for an arbitrary body shape is discussed.

ACKNOWLEDGMENTS

The author gratefully acknowledges the contributions of J. Aroesty, C. Gazley, Jr., and S. A. Berger toward the completion of this research.

CONTENTS

PREFACE .....	iii
SUMMARY .....	v
ACKNOWLEDGMENTS .....	vii
SYMBOLS .....	xi
Section	
I. INTRODUCTION .....	1
II. ANALYSIS .....	2
Boundary-Layer Flow .....	2
Stability Analysis .....	7
Design Implications .....	11
III. CONCLUDING REMARKS .....	14
REFERENCES .....	15

SYMBOLS

- a = velocity profile parameter, Eq. (10)  
b = temperature profile parameter, Eq. (11)  
c = wave speed  
 $c_p$  = specific heat  
H = boundary-layer shape factor, Eq. (7)  
P = pressure  
Pr = Prandtl number  
Q = suction parameter, Eq. (12)  
 $R_c$  = critical Reynolds number  
T = temperature  
u = tangential velocity in the boundary layer  
 $U_e$  = tangential velocity external to the boundary layer  
v = normal velocity in the boundary layer  
 $v_w$  = wall suction velocity  
x = tangential coordinate  
y = normal coordinate  
 $\alpha$  = wave number  
 $\delta$  = momentum layer thickness  
 $\delta^*$  = displacement thickness, Eq. (7)  
 $\delta_T$  = thermal layer thickness  
 $\Delta = \delta\tau/\delta$   
 $\epsilon$  = variable viscosity parameter, Eq. (12)  
 $\mu$  = molecular viscosity  
 $\lambda$  = Pohlhausen, shape factor, Eq. (12)  
 $\kappa$  = thermal conductivity  
 $\rho$  = density  
 $\eta$  = boundary layer coordinate  
 $\theta$  = momentum thickness, Eq. (7)  
 $\Theta$  = energy thickness, Eq. (7)  
 $\phi$  = variable viscosity parameter, Eq. (12)

Subscripts

- e = external to the boundary layer
- t = thermal layer
- w = wall
- x = derivative with respect to tangential coordinate
- y = derivative with respect to normal coordinate

## I. INTRODUCTION

In the study of boundary-layer control, it is well known that suction can completely stabilize a laminar boundary.<sup>(1)</sup> It is also known that heating is stabilizing for a laminar water boundary layer.<sup>(2,3)</sup> Both of these effects have been studied numerically. But as with most numerical studies, the interplay among critical parameters is not illuminated. The expense of conducting either a numerical or a physical experiment deters wide coverage of the various parameters that influence boundary-layer transition.

It is the purpose of this study to present a simple integral solution of self-similar flows that displays the relationship among the various boundary-layer profile parameters. These results will show that the critical Reynolds number as a function of pressure gradient, wall temperature, and wall suction can be correlated with a single boundary-layer parameter. The assumption of local similarity will be used in a discussion of the calculation of the critical Reynolds number for an arbitrary body shape.

II. ANALYSIS

BOUNDARY-LAYER FLOW

In this section, I shall develop the equations that define the boundary-layer profile parameters using an integral analysis. The boundary-layer stability parameters will be determined from the approximate Schlichting-Ulrich correlation and the Lin equations and the profiles derived in this section.

Consider the flow of water around a heated two-dimensional body. The two-dimensional laminar boundary-layer equations for an incompressible, variable-viscosity flow are:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \quad (1)$$

$$\rho u u_x + \rho v u_y = -\frac{dp}{dx} + \frac{\partial}{\partial y} \left( \mu \frac{\partial u}{\partial y} \right), \quad (2)$$

$$\rho c_p (u T_x + v T_y) = \kappa \frac{\partial^2 T}{\partial y^2}, \quad (3)$$

where  $u$  and  $v$  are the tangential and normal velocities,  $x$  and  $y$  are the coordinates tangential and normal to the body, the subscripts  $x$  and  $y$  denote the derivatives with respect to  $x$  and  $y$ , and  $\mu$  is the variable viscosity that depends on the temperature. The specific heat,  $c_p$ , the density,  $\rho$ , and the thermal conductivity,  $\kappa$ , are assumed constant for heated water. The appropriate boundary conditions are:

$$y = \delta: \quad u = U_e, \quad u_y = u_{yy} = 0, \quad T = T_e, \quad T_y = T_{yy} = 0;$$

$$y = 0: \quad u = 0, \quad T = T_w, \quad \rho v_w u_y = \rho U_e \frac{dU_e}{dx} + \frac{d\mu}{dT} \frac{\partial T}{\partial y} \frac{\partial u}{\partial y} + \mu_w \frac{\partial^2 u}{\partial y^2};$$

$$\rho v_w \frac{\partial T}{\partial y} = \kappa \frac{\partial^2 T}{\partial y^2}, \quad (4)$$

where  $v_w$  denotes the wall suction velocity.

The integral equations are obtained by integrating Eqs. (2) and (3) across the boundary layer. The results are:

$$\frac{d\theta}{dx} + \frac{U_e x}{U_e} \theta (2 + H) = \frac{\mu_w}{\rho U_e^2} \frac{\partial u}{\partial y_w} + \frac{v_w}{U_e}, \quad (5)$$

$$\frac{d\theta}{dx} = T_e v_w + \frac{\kappa}{\rho c_p} \frac{\partial T}{\partial y_w}, \quad (6)$$

where

$$\theta = \int_0^{\infty} \frac{u}{U_e} \left(1 - \frac{u}{U_e}\right) dy,$$

$$\delta^* = \int_0^{\infty} \left(1 - \frac{u}{U_e}\right) dy, \quad (7)$$

$$H = \frac{\delta^{**}}{\theta},$$

$$\Theta = \int_0^{\infty} u(T_e - T) dy,$$

I assume that the velocity and temperature profiles can be represented by fourth-order polynomials as expressed by the following:

$$\frac{u}{U_e} = a(\eta - 3\eta^2 + 3\eta^3 - \eta^4) + 6\eta^2 - 8\eta^3 + 3\eta^4, \quad (8)$$



$$\frac{T_e - T_w}{T_e - T_w} = b(\eta_t - 3\eta_t^2 + 3\eta_t^3 - \eta_t^4) + 6\eta_t^2 - 8\eta_t^3 + 3\eta_t^4, \quad (9)$$

where  $\eta = y/\delta$  and  $\eta_t = y/\delta_t$ . The profile parameters are defined by

$$a = \frac{\lambda + 12}{6 - \phi + Q}, \quad (10)$$

$$b = \frac{12}{6 + Q \frac{\Delta Pr}{\delta}}, \quad (11)$$

where

$$Q = \frac{\rho v_w}{\mu_w}; \quad \phi = \left( \frac{d\mu}{dT} \right)_w \left( \frac{T_e - T_w}{\mu_w} \right) \frac{\delta b}{\delta_t} = \frac{\epsilon b}{\Delta}, \quad (12)$$

$$\lambda = \frac{\rho}{\mu_w} \frac{dU_e}{dx} \delta^2; \quad \Delta = \frac{\delta_t}{\delta}.$$

For wall heating and a heated water boundary layer  $\phi > 0$ , and for suction  $Q < 0$ . Therefore, an increase in either or both of these parameters produces an increase in  $a$ .

So far the analytical procedure is similar to that used by Hauptmann,<sup>(3)</sup> except that here emphasis is also being placed on the effects of pressure gradient and suction on boundary-layer stability.

If the profiles given by Eqs. (8) and (9) are used to evaluate the parameters in the boundary-layer equation, one finds that

$$\frac{\theta}{\delta} = \frac{4}{35} + \frac{a}{(5)(21)} - \frac{a^2}{(36)(7)}, \quad (13)$$

$$\frac{\delta^*}{\delta} = \frac{3 - a}{20}, \quad (14)$$

$$\frac{\theta}{\delta_\tau} = \left[ \frac{4}{35} + \frac{a}{20} - \frac{(a+b)17}{(35)(24)} - \frac{ab}{(35)(7)} \right] U_e (T_e - T_w) \quad \text{Pr} \sim 1, \quad (15a)$$

$$\frac{\theta}{\delta_\tau} \approx \Delta \frac{a}{60} (6-b) U_e (T_e - T_w) \quad \text{Pr} \gg 1; \quad \Delta \ll 1. \quad (15b)$$

Equations (15a) and (15b) represent the appropriate cases for a heated water boundary layer. Substituting Eqs. (8) and (9) into Eqs. (5) and (6)

$$\frac{d\theta}{dx} + \frac{U_{ex}}{U_e} \theta(2+H) = \frac{\mu_w}{\rho U_e \delta} (a+Q), \quad (16)$$

$$\frac{d\theta}{dx} = \frac{(T_e - T_w)}{\delta_\tau} \frac{\kappa}{\rho c_p} [b + \Delta Q \text{Pr}]. \quad (17)$$

For the self-similar Falkner-Skan flows,  $a$ ,  $b$ ,  $Q$ ,  $\frac{\delta_\tau}{\delta}$ , and  $\phi$  are constants, and  $U_e \sim x^m$ . The wall temperature is a constant, and the slight variations in  $T_e$  will be neglected.

Solving Eqs. (16) and (17) for  $\delta$  and  $\Delta$  yields

$$\delta^2 = \frac{2x\mu_w (a+Q)}{\rho U_e (1+4m+2mH) \left( \frac{4}{35} + \frac{a}{(5)(21)} - \frac{a^2}{(36)(7)} \right)} \quad (18)$$

and

$$\Delta^2 = \frac{2x\mu_w [b + \Delta Q \text{Pr}]}{\delta U_e \delta^2 \text{Pr} \left[ \frac{4}{35} + \frac{a}{20} + \frac{(a+b)17}{(35)(24)} - \frac{ab}{(36)(7)} \right]} \quad \text{Pr} \cong 1 \quad (19a)$$

$$\Delta^3 \cong \frac{2\mu_w x}{\rho U_e \delta^2} \text{Pr} [b + \Delta Q \text{Pr}] \quad \text{Pr} \gg 1. \quad (19b)$$

These equations are not explicit expressions for  $\delta^2$  and  $\Delta$  because the boundary-layer parameters  $a$ ,  $b$ , and  $Q$  contain either  $\delta$  or  $\delta_T$  or both. Of course, they could be solved numerically. However, to find the important parameters I shall use simplifying assumptions of local similarity.

With flat-plate local similarity,

$$\delta_0^2 = \frac{4x\mu_w}{\rho U_e} \frac{315}{37}$$

$$\Delta_0 = Pr^{-1/2} \quad Pr \sim 1$$

$$\Delta_0 = Pr^{-1/3} \quad Pr \gg 1 . \quad (20)$$

Using the above values in the equations for  $a$ ,  $b$ ,  $Q$ , and  $\phi$ , one can derive first approximations for these parameters. For example, the case where  $Pr \sim 1$  results in

$$a_0 = \frac{\frac{210m}{37} + 2}{1 - \left[ \epsilon 2Pr^{1/2} - \frac{v_w}{U_e} \sqrt{\frac{4(315)(\rho U_e x)}{37\mu_w}} \right]} . \quad (21)$$

$$b_0 = \frac{2}{1 + \left[ \frac{\frac{v_w}{U_e} \sqrt{\frac{4(315)(\rho U_e x)}{37\mu_w}}}{6} Pr^{1/2} \right]} . \quad (22)$$

The above equations are the first approximation of the parameters  $a$  and  $b$ . The procedure for calculating  $\delta$ ,  $\Delta$ ,  $a$ ,  $b$ ,  $\lambda$ , and  $H$  for arbitrary body shape and arbitrarily distributed but modest magnitude of suction is to calculate  $a$  and  $b$  from Eqs. (21) and (22). The parameter

$m$  is evaluated locally by using the definition that  $m = \left( \frac{dU_e}{dx} \right) \frac{x}{U_e}$ . The resulting values of  $a$  and  $b$  are used in Eqs. (18) and (19) to determine  $\delta$  and  $\Delta$ . These results are then used in Eqs. (10)-(15) to calculate approximate values of the boundary-layer parameters.

### STABILITY ANALYSIS

There are two possibilities of approximately relating the critical Reynolds number to a boundary-layer parameter. The first is the Schlichting-Ulrich correlation, <sup>(3)</sup>

$$R_e = 645 \exp(0.6a) . \quad (23)$$

The second is the Lin approximation, <sup>(4)</sup>

$$\pi u'_w \left( \frac{uu''}{u'^3} \right)_c = 0.58 \quad (24)$$

$$\alpha = u'_w c \quad (25)$$

$$R_c^4 = 25u'_w , \quad (26)$$

where the velocity has been normalized with  $U_e$ , the subscript prime denotes  $d/(d \frac{y}{\delta})$ , and the Reynolds number is based on displacement thickness, free-stream velocity, and free-stream viscosity.

The Schlichting-Ulrich approximation is the simplest, and it will be the first to be considered. However, a relationship between  $a$  and  $H$  must be determined because the parameter most used in stability correlations is the shape factor  $H$ . From Eqs. (13) and (14) one can show that the parameter  $H$  is related to  $a$  in the following way:

$$2a = \frac{3}{5H} (4H + 21) - \sqrt{\left[ \frac{3}{5H} (4H + 21) \right]^2 + \frac{288}{5H} (2H - 7)} . \quad (27)$$

Note that the critical Reynolds number given by Eq. (23) depends only on the shape factor  $H$ . Therefore, a universal curve for  $R_c$  as a function of  $H$  can be calculated that includes the effects of pressure gradient, variable viscosity, and suction.

Let us investigate the Lin approximation to see if the observation holds true there. Using the profile given by Eq. (8), one can show that Eqs. (24)-(26) reduce to

$$-\pi a \left( \frac{ff''}{f'^3} \right)_c = 0.58 \quad (28)$$

$$\alpha = \alpha c, \quad (29)$$

$$R_c = \frac{25a}{c}, \quad (30)$$

where  $f$  is defined by Eq. (8). Equation (28) could be used to determine the disturbance wave speed  $c$ . This equation states that the critical layer is determined only by the profile parameter  $a$ , which implies that  $c$  is only a function of the shape factor  $H$ . Equation (29) implies that the critical  $\alpha$  wave number is a function of  $H$ , and Eq. (30) implies that the critical Reynolds number is also a function of  $H$  alone.

Two different approximations of the critical parameters for boundary-layer stability have been used to show that the critical parameters are a function of only the shape factor  $H$ . This conclusion is independent of the local similarity assumption of the previous section. The implication for correlating experimental and design data is encouraging. For example, Fig. 1 (taken from Ref. 4) shows a correlation of  $R_c$  for various pressure gradients and suction effects with the shape factor  $H$ . This correlation and Eq. (23) are in fair agreement when  $2.3 \leq H \leq 2.70$ .

There are indications that  $k$  is not the only possible universal parameter. A parameter discussed and defined as  $\bar{u}''(0) = u_{yy}''(0)/U_e(\delta^2)$

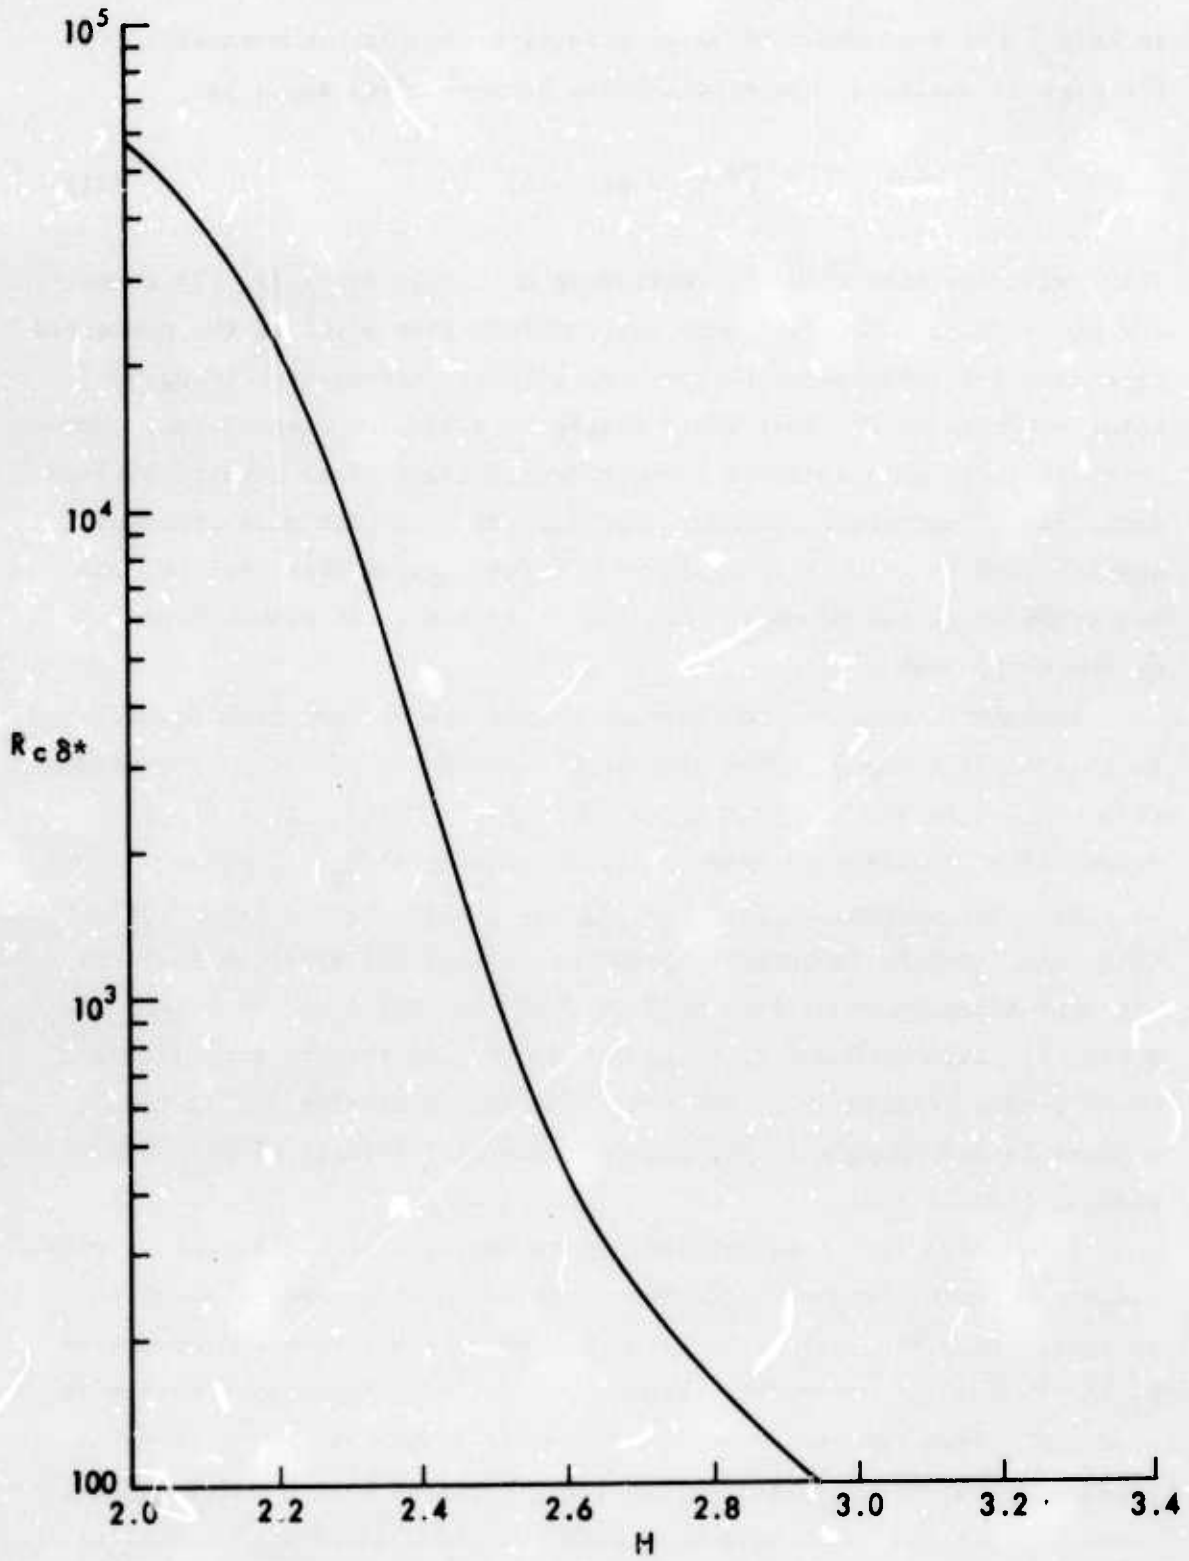


Fig. 1 — The critical Reynolds number as a function of the shape parameter

in Ref. 2 has been shown to be an effective correlation parameter. In the present analysis, the relationship between  $\bar{u}''(0)$  and  $a$  is

$$\bar{u}''(0) = 6(2 - a) . \quad (31)$$

This indicates that  $\bar{u}''(0)$  is related to  $H$  through Eq. (27). In comparing Eq. (27) with Eq. (31), one may conclude that  $\bar{u}''(0)$  is the preferred parameter for correlating theoretical results derived from integral solutions because Eq. (31) would result in a simpler computation. However, there is no preference in correlating theoretical results derived from "exact" numerical computer solutions because both parameters are equally easy to calculate. For correlating experimental results, one may prefer  $H$  as the parameter because it is easier to deduce from measurements than  $\bar{u}''(0)$ .

Another interesting consideration that can be seen from Eq. (23) is that small changes in the profile parameter,  $a$ , can produce considerable changes in the critical Reynolds number. Changes in  $a$  are exponentially amplified to produce larger changes in  $R_c$ . Further, it can be shown that changes in wall heating and suction have a larger effect than small changes in pressure gradient. It is not apparent that the Lin approximation would substantiate this conclusion to the extent of making it cogent. However, it can be shown that the Lin approximation would produce similar results, small changes in heating and suction produce larger changes in  $R_c$ , and the numerical results of Ref. 2 have similar indications.

The reason for these conclusions is that the derivative of  $R_c$  with respect to either the wall-heating parameter or the suction parameter is larger than the derivative with respect to the Pohlhausen parameter by the factor  $a$ , the profile parameter. The additional implication is that the larger the parameter  $a$  or the more favorable the pressure gradient, the more stabilizing are the effects of wall heating and suction. This trend is in agreement with one established with numerical results in Ref. 5.

It is interesting to compare the relative effects of heating and suction. The criterion for the comparison is how large must the physical

boundary conditions,  $T_w$  and  $\rho v_w / \rho U_e$ , be so that both  $\phi$  and  $Q$  in Eq. (12) have an order of unity magnitude. According to Refs. 6 and 7, surface conditions of this magnitude have large effects on the boundary-layer flow. For an order unity  $\phi$  and  $T_e = 60^\circ\text{F}$ , the surface has to be heated to at least  $160^\circ\text{F}$ . For an order unity  $Q$  and  $\rho U_e x / U_w \sim 10^6$ , the suction parameter  $\rho v_w / \rho U_e$  has to be  $\rho v_w / \rho U_e \sim 10^{-3}$ . Thus suction appears to be more effective than heating in stabilizing the boundary layer. The implication here is that it is much more difficult to provide a system that will produce wall temperatures on the order of  $160^\circ\text{F}$  than to provide a suction velocity that is a tenth of a percent of the free-stream velocity.

#### DESIGN IMPLICATIONS

For an arbitrary body shape, the results presented here can be used to indicate the critical boundary-layer stability parameters. For example, the Pohlhausen parameter  $\lambda$  can be calculated using the procedure discussed in a previous section. Using results similar to that given in Fig. 2, one can determine the profile parameter  $a$  for all heating,  $\phi \neq 0$ , and arbitrary suction  $Q \neq 0$ . The value of  $a$  is used in Fig. 3, which is a plot of Eq. (27), to determine a value of  $H$ ; this  $H$  is used in Fig. 1 to determine a value of  $R_c$ . Note that the trends given by the approximate analysis are correct. Increasing wall heating, one will find from Fig. 2 that  $a$  increases for a given  $\lambda$ . Figure 3 shows that as  $a$  increases  $H$  decreases, and Fig. 1 shows that as  $H$  decreases  $R_c$  increases.



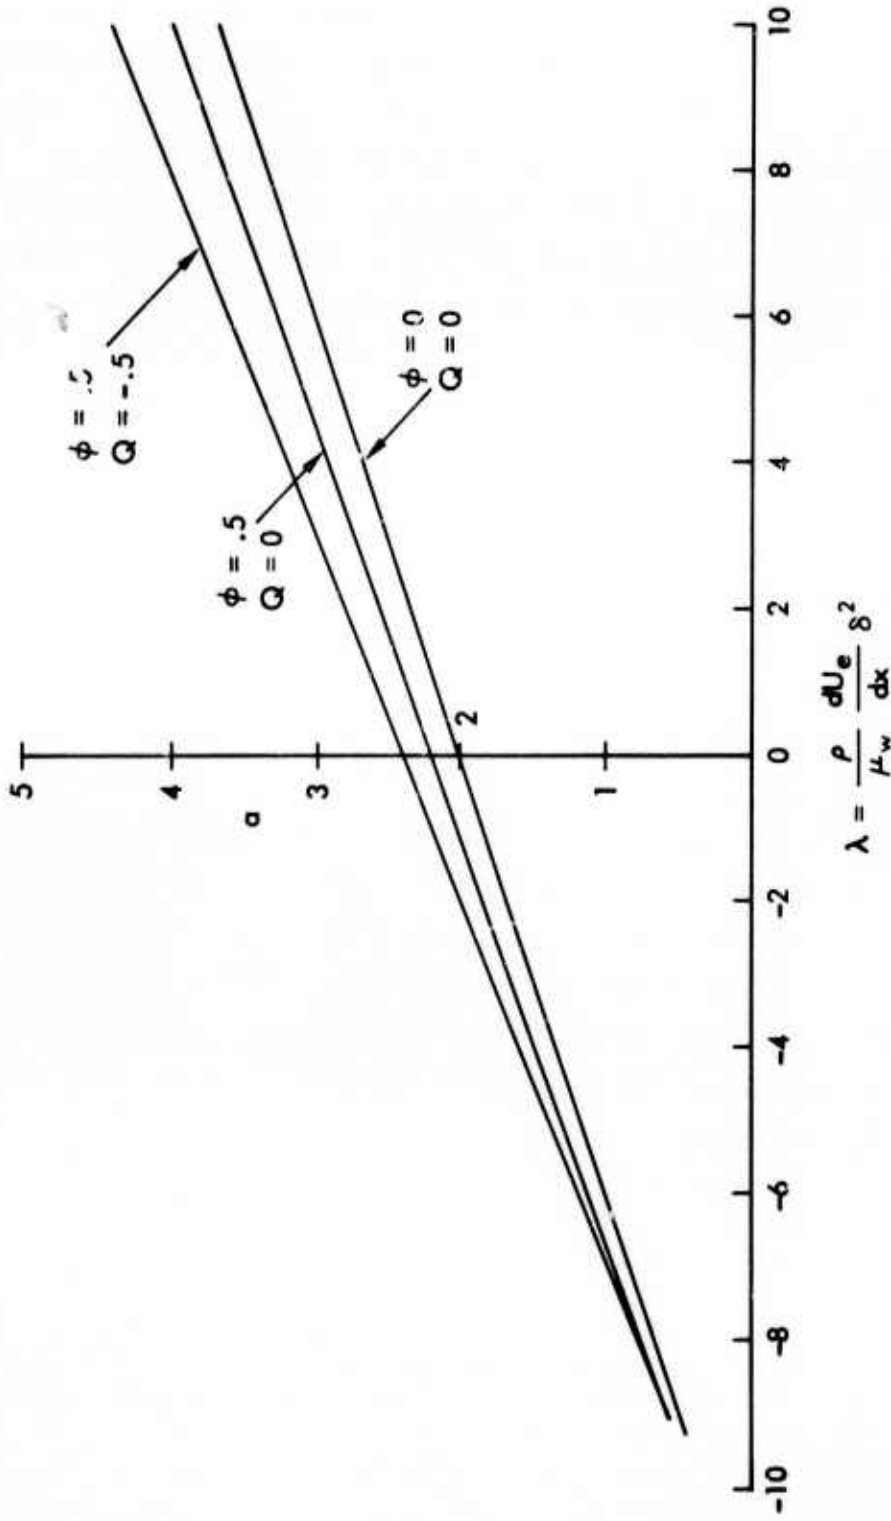


Fig. 2 — Profile parameter vs Pohlhausen parameter with suction and heating

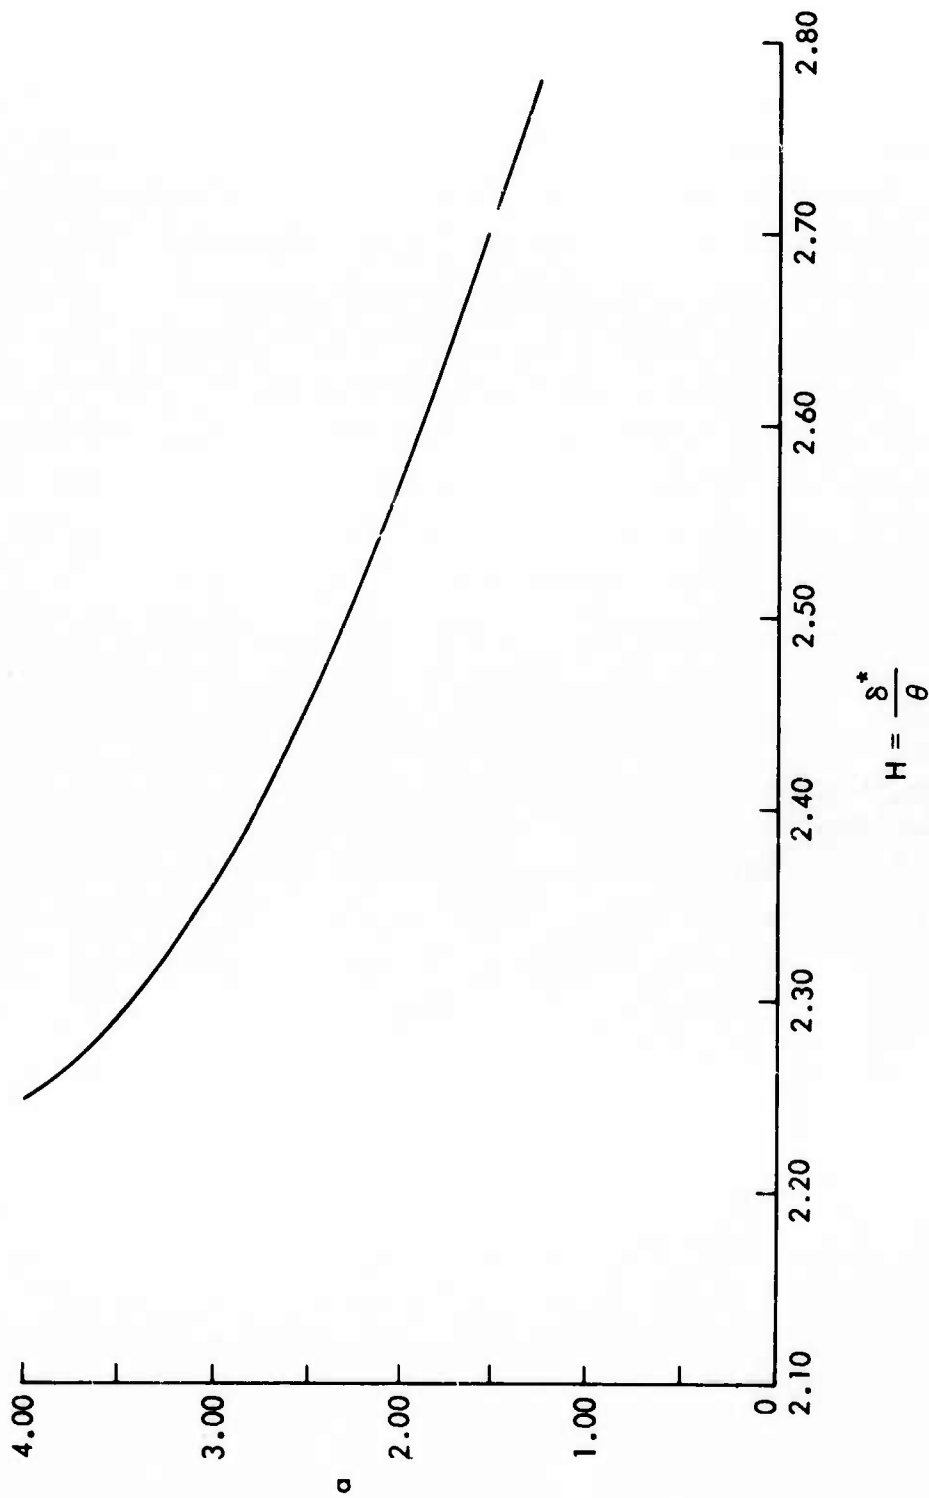


Fig. 3— Profile parameter vs shape factor

### III. CONCLUDING REMARKS

The effects of wall heating and suction on the stability of a two-dimensional, laminar boundary layer have been studied by using an integral analysis of the boundary layer, and the Schlichting-Ulrich and Lin approximations to determine the critical Reynolds number. It was shown that the effects of pressure gradient, wall heating, and suction could be incorporated into a universal curve of the critical Reynolds number as a function of either shape factor  $H$  or the parameter proposed by Wazzan,  $\overline{u}''(0)$ . Further, it was indicated that small changes in wall heating and suction produce large changes in the critical Reynolds number and that suction is more effective in stabilizing a boundary-layer flow than wall heating. It was also shown that changes in the critical Reynolds number produced by changes in pressure gradient were smaller than those produced by changes in wall heating and suction. The assumption of local-similarity was used to discuss a method for locating the critical Reynolds number.

Although the parameter crucial to designers is the location of transition and not so much the critical Reynolds number, it is possible that the above result can be useful in correlating transition. A further study of existing data and correlations is required.

REFERENCES

1. H. Schlichting, *Boundary Layer Theory*, Pergamon Press, New York, 1955, pp. 351-359.
2. A. R. Wazzan, T. T. Okamura, and A. M. O. Smith, "The Stability and Transition of Heated and Cooled Incompressible Laminar Boundary Layers," *Proceedings 4th International Heat Transfer Conference*, Paris, 1970.
3. E. C. Hauptmann, "The Influence of Temperature Dependent Viscosity on Laminar Boundary-Layer Stability," *International Journal of Heat and Mass Transfer*, June 1968, pp. 1049-1052.
4. L. Rosenhead, *Laminar Boundary Layers*, Oxford Press, 1963, pp. 544-548.
5. A. R. Wazzan and Gerlina Keltner, "Effect of Heat Transfer on the Temporal Growth of Tollmien-Schlichting Waves in Stagnation Water Boundary Layers," *AIChE Symposium Series*, Vol. 69, No. 131, pp. 167-173.
6. K. Kaups and A. M. O. Smith, "The Laminar Boundary Layer in Water with Variable Properties," Douglas Aircraft Corp. Pap 3780, presented at the Ninth ASME-AICHE National Heat Transfer Conference, Seattle, Washington, August 6-9, 1967.
7. Rudolf Iglisch, "Exact Calculation of Laminar Boundary Layer in Longitudinal Flow over a Flat Plate with Homogeneous Suction," NACA TM 12 CS, 1949.