

AD-A034 817

ILLINOIS UNIV AT URBANA-CHAMPAIGN SAVOY AVIATION RES--ETC F/G 1/4  
ADVANCED INTEGRATED AIRCRAFT DISPLAYS AND AUGMENTED FLIGHT CONT--ETC(U)  
NOV 76 S N ROSCOE

N00014-76-C-0081

UNCLASSIFIED

ARL-76-17/ONR-76-4


NL

| OF |  
ADAC34817



END

DATE  
FILMED  
2 - 77

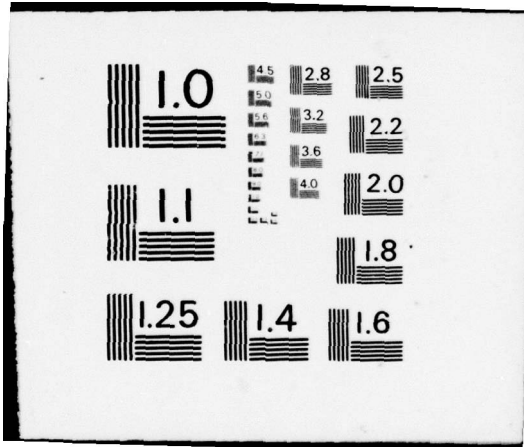

ADA034817

# AVIATION RESEARCH LABORATORY

INSTITUTE OF AVIATION  
UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN

12

TECHNICAL REPORT



## ADVANCED INTEGRATED AIRCRAFT DISPLAYS AND AUGMENTED FLIGHT CONTROL : SCIENTIFIC FINAL REPORT

STANLEY N. ROSCOE

ARL-76-17/ONR-76-4

NOVEMBER 1976

Contract: N00014-76-C-0081  
Work Unit Number: NR 196-133

Reproduction of this document in whole or in part is  
permitted for any purpose of the U.S. Government

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED

PREPARED FOR

ENGINEERING PSYCHOLOGY PROGRAMS  
AND AERONAUTICS PROGRAMS  
OFFICE OF NAVAL RESEARCH

D D C  
R  
JAN 28  
C

AVIATION RESEARCH LABORATORY

University of Illinois at Urbana-Champaign  
Willard Airport  
Savoy, Illinois  
61874

Technical Report

ARL-76-17/ONR-76-4

November 1976

ADVANCED INTEGRATED AIRCRAFT DISPLAYS AND AUGMENTED FLIGHT CONTROL:

SCIENTIFIC FINAL REPORT

Stanley N. Roscoe

Prepared for  
ENGINEERING PSYCHOLOGY PROGRAMS  
OFFICE OF NAVAL RESEARCH

Contract: N00014-76-C-0081  
Work Unit Number: NR 196-133

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARL-76-17/ONR-76-4 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Advanced Integrated Aircraft Displays and Augmented Flight Control Scientific Final Report ✓		5. TYPE OF REPORT & PERIOD COVERED Scientific Final, 1973-76
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Stanley N. Roscoe	8. CONTRACT OR GRANT NUMBER(s) N00014-76-C-0081 ✓	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Aviation Research Laboratory Institute of Aviation University of Illinois, Savoy, IL 61874 ✓		10. PROGRAM ELEMENT, PROJECT, TASK AREA, WORK UNIT NUMBERS NR 196-133
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research (Code 455) 800 North Quincy Street Arlington, Virginia 22217		12. REPORT DATE November, 1976
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) ARL-76-17/ONR-76-4		13. NUMBER OF PAGES
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. Final scientific rept. 1973-1976,		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) 39p.		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
Flight Displays	Flight Director Displays	Quickening
Pursuit Displays	Cockpit Instrumentation	Unburdening
Display Symbology	Compensatory Displays	Flight Control
Human Factors	Contact Analog Displays	Cockpit Workload
Attitude Displays	Predictor Displays	(Cont. on Reverse)
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
<p>The Aviation Research Laboratory of the University of Illinois has investigated integrated computer-generated symbolic displays and computer-augmented flight control for the Office of Naval Research. The research was directed toward (1) the isolation of minimum sets of visual image cues sufficient for spatial and geographic orientation in the various ground-referenced phases of representative flight missions, (2) the generation and spatially integrated presentation of computed guidance commands and fast-time flight path predictors.</p>		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

406 171 LB

19. Key Words Cont.

Pilot Workload  
Computer-Generated Displays  
Computer-Augmented Control  
Manual Flight Control  
Performance Control System  
Control Authority  
Frequency-Separated Displays  
Aviation Psychology

*Cont*

20. Abstract Cont.

and (3) the matching of the dynamic temporal relationships among these display indications for compatibility with computer-augmented flight performance control dynamics, both within each ground-referenced mission phase and during transitions between phases. The investigative program drew selectively upon past work done principally under ONR sponsorship or partial sponsorship, including the ANIP and JANAIR programs.

SEARCHED FOR	White Section <input checked="" type="checkbox"/>
RTS	Britt Section <input type="checkbox"/>
DTG	<input type="checkbox"/>
ADVANCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION AVAILABILITY CODES	
Dist.	GENL, SPEC, OR SPECIAL
<b>A</b>	

## CONTEXT

The Aviation Research Laboratory of the University of Illinois has investigated synthetic-imaging displays and computer-augmented flight control for the Office of Naval Research. Mr. Gerald Malecki, Assistant Director, Engineering Psychology Programs, was the technical monitor of the research. Professor Stanley N. Roscoe was the principal investigator during the initial phase of study and experimental apparatus development; Professor Robert C. Williges served as principal investigator while Professor Roscoe was on academic leave during 1975-76.

The research was directed toward (1) the isolation of minimum sets of visual image cues sufficient for spatial and geographic orientation in the various ground-referenced phases of representative flight missions, (2) the generation and spatially integrated presentation of computed guidance commands and fast-time flight path predictors, and (3) the matching of the dynamic temporal relationships among these display indications for compatibility with computer-augmented flight performance control dynamics, both within each ground-referenced mission phase and during transitions between phases. The investigative program drew selectively upon past work done principally under ONR sponsorship or partial sponsorship, including the ANIP and JANAIR programs.

During Phase I of the contract, the Aviation Research Laboratory systematically investigated the relationships between the movement of the controls and the response of the airplane and demonstrated substantial improvement in pilot performance as a consequence of their reorganization. By the completion of Phase I, all planned control modifications, specifically the digital control system, were incorporated into the GAT-2 simulator, and both a real-time visual scan converter and a peripheral device for linear coordinate transformation were designed, fabricated, and integrated with the simulation facility (Daly, Collins, and Ruby, 1975).

To study experimentally the effectiveness of alternate sets of visual cues the Aviation Research Laboratory developed a highly versatile computer-generated display system to present dynamic pictorial images either on a head-down, panel-mounted CRT or on a head-up television projection to a large screen mounted in front of the pilot's windshield on the Link GAT-2 simulator. Due to the great flexibility of the pictorial display, visual cues and flight status information can be manipulated experimentally. Experimentation was conducted to isolate the visual cues sufficient for approach and landing (Eisele, Williges, and Roscoe, 1976).

The incorporation of predictive indications of successive future states into the contact analog scene was programed for computer generation during Phase II (Artwick, 1976). Studies were conducted to determine the number and temporal spacing of flight path predictors to be integrated into the forward-looking flight view (Gallaher, Hunt, and Williges, 1976).



Determination and software implementation of command guidance symbology compatible with the synthetic forward-looking contact analog and predictive flight path presentations were also undertaken with the ultimate objective to develop a reconfigured cockpit with integrated sensor- and computer-generated imaging displays and computer-augmented controls applicable to advanced Naval aircraft.

## TECHNICAL DISCUSSION

### Issues and Principles

The controls and displays that make it possible for a pilot to fly a modern airplane involve a great deal of computer processing between control inputs, airplane responses, and display indications. However, generalizable principles to guide the airplane designer in his application of computers have not been followed; indeed, they have never been formally developed and explicitly stated. For example, while semi-automatic "fly-by-wire" control systems give the pilot more direct command of flight performance than do conventional controls, the relationship between the pilot's control inputs and airplane responses have not been arrived at by the application of either rationally or empirically derived principles.

Furthermore, military airplanes much of the time still demand moment-to-moment manipulation of angular and linear accelerations, a method of control that requires the pilot to perform complex transformations between input and output variables that shift in range and sensitivity both gradually during a mission phase and abruptly from phase to phase. Studies performed by the Calspan Corporation (Lebacqz and Aiken, 1975) suggest that the difficulty of flying with manual control systems that require complex input/output transformations can be offset by the proper transformation and integration of displayed information; conversely, the difficulty of flying with displays of unrelated raw information can be eased through control augmentation.

Although there unquestionably is a tradeoff between improvements in displays and improvements in controls, as advanced by the Calspan investigators, it is evident that an improvement in either is always beneficial and that the greatest benefit comes from the matching of display and control systems to minimize pilot transformation requirements. The optimum display/control system is one that provides the pilot ease of control, but with sufficient manual control authority for flexible response to changing tactical requirements, and at the same time allows him to maintain continuous geographic, topographic, and situational orientation to recognize immediately that a relevant change has occurred in the flight situation.

Despite the absence of formally stated principles for computer application to achieve the optimum display/control system, several investigators within the US Navy or supported by ONR over the past 30 years have advanced systematic analytical treatments and some formal experimentation relevant to the subject. The first investigator to address the subject analytically was Williams (1947/71) who developed a conceptual framework for the organization of information required for instrument flight, analyzed the manipulations involved in flight control, and recommended desirable characteristics for flight displays. Williams was followed by Birmingham and Taylor (1954); Ritchie (1960); Carel (1965); Kelley (1968); Roscoe (1968; 1974); Johnson and Roscoe (1972); Kraus and Roscoe (1973); Roscoe and Williges (1975); Ince, Roscoe and Williges (1975); Beringer, Williges, and Roscoe (1975); Roscoe, Eisele, and Bergman (1975); and Eisele, Williges, and Roscoe (1976).

Throughout the papers just cited, there is ample evidence that the complexity of manual control transformations can be simplified through computer assistance in many ways to make the task of flying the airplane more straightforward (Roscoe, Eisele, and Bergman, 1975). Control systems can be designed to require pilot inputs at any level in the control-order hierarchy as appropriate to the phase of a mission or even to the immediate flight situation encountered. Predictor and command guidance displays can readily integrate information in a manner that eliminates many transformations that would otherwise be required of the pilot. To advance such currently feasible applications with confidence requires the explicit statement of human engineering principles of computer application to flight control and display system design.

#### Approach

The proper approach to any system design problem is first to determine the functions the system must perform to accomplish its mission and then the best distribution of those functions between the people in the system and automatic devices. For example, if control of the six degrees of freedom of the aircraft constitutes the functions under consideration, it is necessary at the outset to decide on a basis for distributing control authority and responsibility for these functions between the pilot and the automated portions of the control system.

Control augmentation. At least in theory, it would be possible to give the pilot authority over position, rate, acceleration, or rate of change of acceleration with respect to any or all of the six degrees of freedom. The farther along this list his authority extends, the greater his responsibility for coordinating moment-to-moment control movements. As his control authority shifts in the opposite direction, the system becomes increasingly automatic, and his direct control responsibilities diminish (Roscoe and Kraus, 1973; Roscoe, Eisele, and Bergman, 1975).

The essential problem is that of determining the point at which the pilot should interface with semiautomatic controls to minimize the difficulty and attention demands of his control task without depriving him of the minimum essential control authority to counter any reasonably likely flight contingency. To the extent that he can be removed from the inner loops of control, where he performs principally transforming functions, he will be unburdened of the routine of repetitive manipulation, and his performance will be more precise and less variable.

The Aviation Research Laboratory has systematically investigated the relationships between the movement of the controls and the response of the airplane and demonstrated substantial improvement in pilot performance as a consequence of their reorganization. Initial investigations by Kraus (Roscoe and Kraus, 1973) showed that placing bank angle and vertical speed under direct pilot control not only yielded reliable improvements in altitude and course holding but also reduced navigation procedural errors by 90 percent. The configuration was called the Performance Control System (PCS). Subsequent equipment developments and

experiments by Bergman (1974, 1976) showed similar performance benefits in flight.

Although simulator and flight research using the PCS system at ARL supported the contention that a pilot's enroute navigation performance is improved when the order of control that the pilot performs is reduced, this principle is complex and has additional implications for other flight tasks. Subsequently, the simulated PCS system was modified to investigate reduced orders of control of airspeed, rate of climb, bank angle, aircraft side-slip, and heading during approaches to landings. In addition, the ability to provide discrete vertical (glideslope) and crosscourse (localizer) displacements was investigated by incorporating direct lift and sideforce controls representative of those employed in control configured airplanes.

Integrated pictorial displays. Computer image generation (CIG) technology is now capable of presenting real-time dynamic projections of complex scenes in true picture-plane perspective. Early advocates of CIG vertical-situation flight displays assumed that all information essential to the pilot for orientation and control is available from a clear view of the outside world; hence, if highly literal dynamic images of the world as viewed from the cockpit were generated, the pilot would have the best possible forward-looking display. This belief fostered the investment of a great deal of money and effort in the procurement and programing of giant computers and display devices to generate such scenes. A more promising alternate approach has been to isolate "essential" or, more appropriately, sufficient visual cues from the

contact view that the pilot can use effectively and incorporate them into a highly stylized skeletal contact scene (Eisele, Williges, and Roscoe, 1976).

Within the framework of the skeletal perspective view of the contact scene, it is possible to embed both command guidance indications and some representation of the airplane's projected flight path. These three types of indication represent, respectively, what Professor A. C. Williams of the University of Illinois referred to as orientation information, indices of desired performance, and indices of actual performance. A contact analog normally represents the situation at the present time, whereas command guidance may be presented as a function of time, and a flight-path predictor display is, by definition, a representation of successive future states of the system.

Pursuit versus compensatory steering. When the pilot's task is to null an error arising from a discrepancy between his actual position or course and his desired position or course, two forms of presentation have traditionally been used: pursuit and compensatory. Pursuit displays, also called "following" or "true-motion" displays, have two indices, one representing the pilot's own airplane and the other representing the target or desired position or course; both symbols move against a common scale or reference system. Compensatory, or relative motion, displays have only one moving index with the direction and distance between it and a fixed reference index representing the error (Johnson and Roscoe, 1972).

Various embodiments of the two arrangements have been compared by many investigators in many experiments involving a wide range of tasks. Despite the fact that most steering guidance displays call for compensatory tracking, with no critical exception the experiments show pursuit tracking to be consistently superior by about two to one on average, with the ratio of superiority increasing with task complexity. Resistance to the adoption of the pursuit steering arrangement has been based on the fact that a "pure" pursuit display is mapped in earth rather than airplane coordinates, thereby rendering it "outside-in" rather than "inside-out" and consequently creating tradeoff problems between scale factors and fields of view.

Fortunately the benefits of pursuit steering are not limited to the "pure" pursuit arrangement; various hybrid arrangements yield the same benefits without incurring the difficulties, the most thoroughly tested of which is the "frequency separation" principle studied at the University of Illinois (Johnson and Roscoe, 1972; Roscoe and Williges, 1975; Ince, Williges, and Roscoe, 1975; Beringer, Williges, and Roscoe, 1975). A frequency-separated display, by somewhat arbitrary definition, is one in which both symbols move, the one representing the airplane moving in response to the "higher frequency" acceleration and rate components of the airplane's response which are not normally displayed directly, and the symbol or symbols representing the outside world moving in their customary manner to indicate the "lower frequency" rate and position components of the airplane's response to which pilots are accustomed.



Flight path prediction. If the pitch and bank angles of the airplane are represented by fixed indices relative to a moving horizon line, the momentary vertical flight path angle may be represented by an airplane symbol that is displaced vertically as a function of the angle of attack (Roscoe, Eisele, and Bergman, 1975). The airplane symbol thus becomes, in effect, a velocity vector symbol (see Figure 1). If two successively smaller airplane symbols are displaced and rotated relative to the initial airplane symbol by terms that approximate, respectively, rates of change in flight path angles and rates plus accelerations in flight path angles, an effective approximation of the curvilinear projection of the flight path can be effected with proper scaling (also shown in Figure 1).

Although the frequency-separated flight path projection thus achieved is an imprecise approximation when the airplane is maneuvering, the errors of projection decrease as the airplane approaches the desired flight path and the pilot resumes a steady state of flight, at which point the projection is correct. Fortunately, errors in approximation while the pilot is maneuvering onto the desired course, vertical gradient, final approach path, or weapon-delivery run are generally of little consequence, their main effect being to cause the pilot to capture his desired flight path more or less rapidly. Furthermore, all approximations are improved by scaling as a function of speed.

Command guidance. Computed guidance commands can be embedded in a perspective contact scene in many ways, the choice of which depends upon both the complexity and the precision of the flight path control required

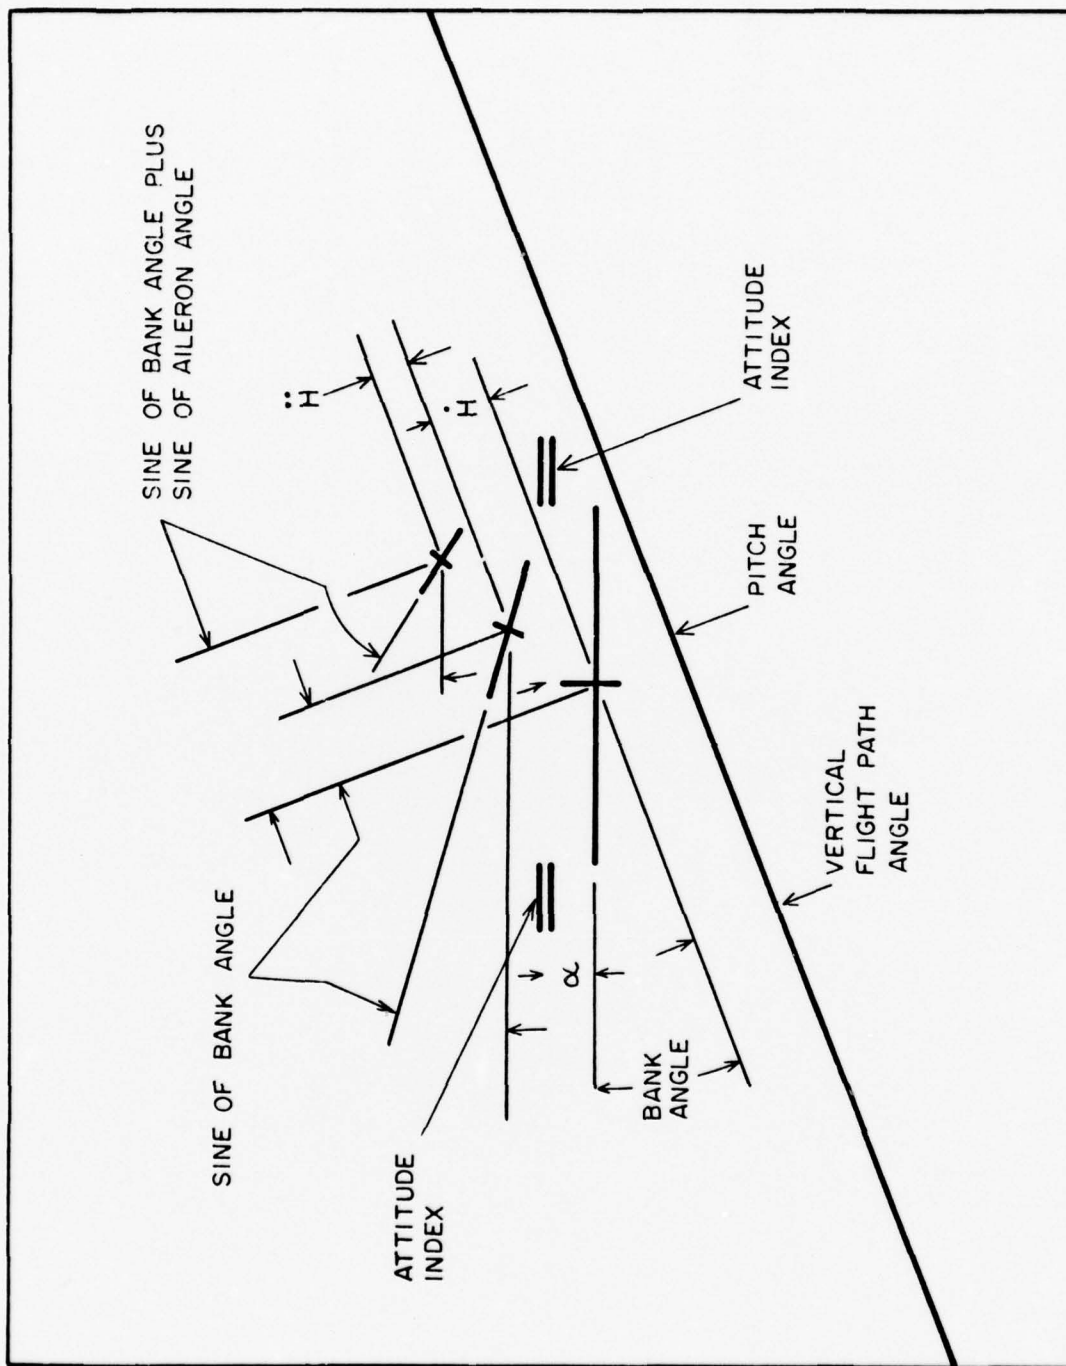


Figure 1. Flight path predictor in all airborne modes.

(Roscoe, Eisele, and Bergman, 1975). If a flight path predictor is to be used, the resulting display, by definition, becomes a hybrid pursuit display, and for any flight maneuver that can be reduced basically to a tracking task, a simple indication of horizontal and vertical angles to turn through, represented by a steering dot or small circle toward which the predictor is constantly driven by the pilot, will yield the ultimate in manual tracking precision. Such a display is appropriate to takeoff, enroute and terminal area navigation, and air-to-air interception and attack.

Ground-referenced maneuvers, ones defined in three dimensions relative to specific surface objects, such as approaches to airport runways and terrain following or avoidance in the vicinity of a target, can also be reduced to tracking tasks, but some of the potential contributions of the pilot can be lost in the process. In such cases, curvilinear command guidance indications, as represented, for example, by the "highway in the sky" concept, offer the pilot a perspective view of his desired position as a function of time and/or distance, which in turn may allow him to make better use of his flight path predictor.

Figure 2 illustrates the application of ground-referenced command guidance to the ILS approach to an airport runway; the airplane is clearly to the left and above the path defined by the localizer and glide path beams. Informal simulator studies at the University of Illinois have shown this type of guidance to facilitate the use of the flight path predictor. Although curvilinear guidance paths have not been simulated to date, their contributions relative to compensatory steering dot commands would be expected to be even greater.

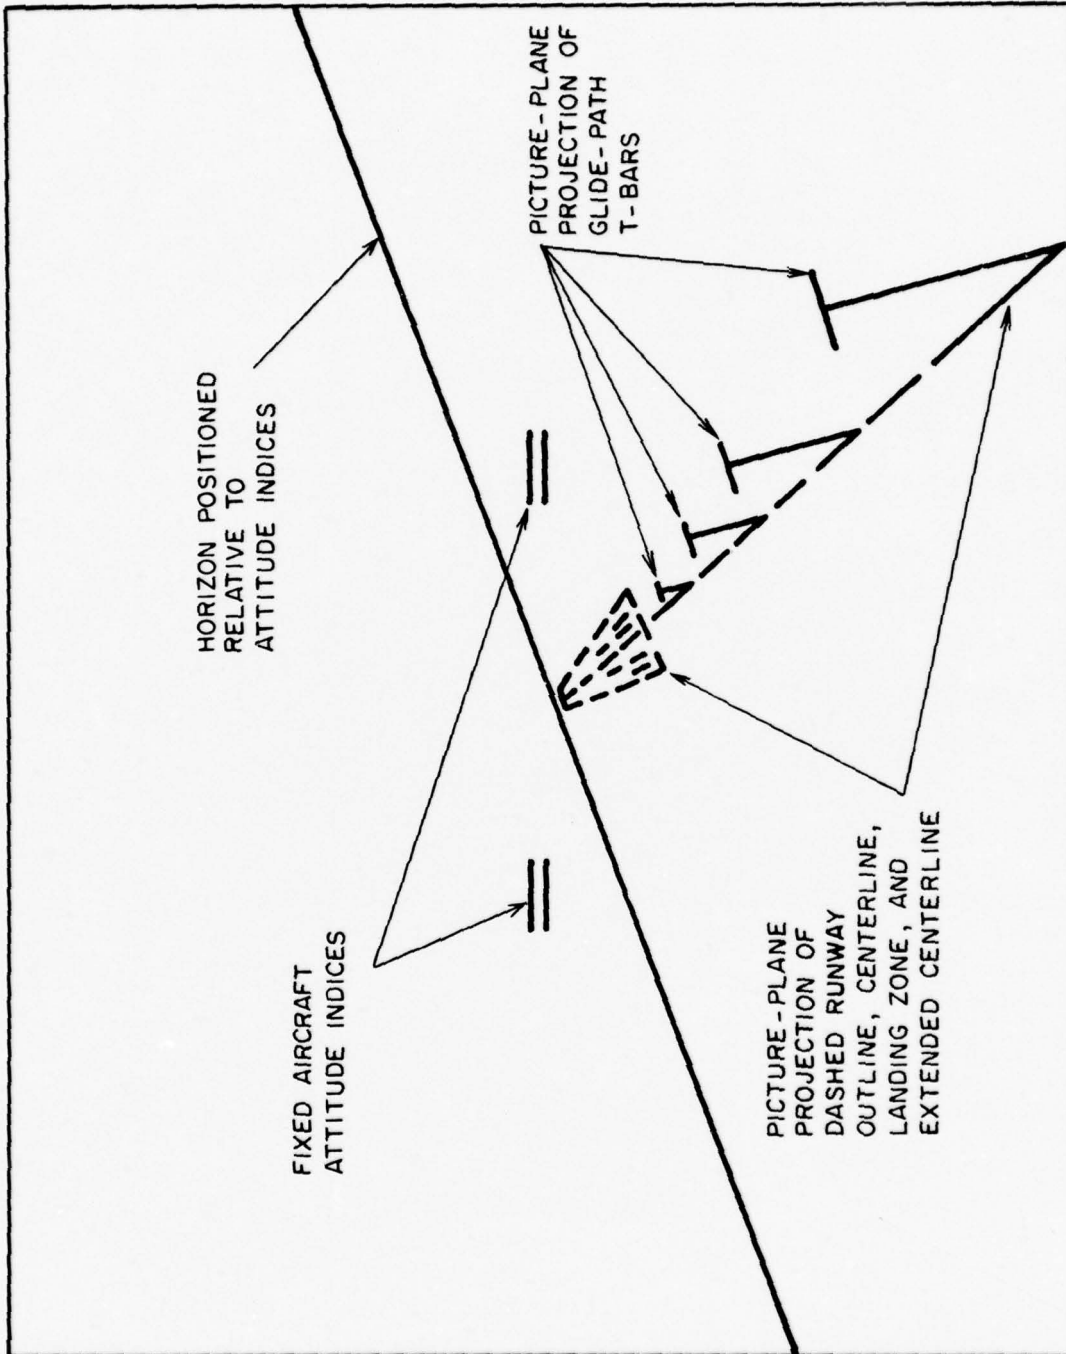


Figure 2. Basic position and attitude indications in landing approach.

Rate fields as flight directors. The main advantage of pictorial displays is the instant orientation afforded by the fact that relationships among various items of information are presented directly; the requirement for transformations by the pilot is minimized. However, the price of pictorial display is often a reduction in the scale or sensitivity of presentation of flight variables that require close and timely attention for precise control. For flight maneuvers such as weapon delivery or zero-visibility takeoffs and landing, indices of desired and actual performance must be presented with high sensitivity and with virtually no sensing or filtering lags.

One excellent method of presenting computer-assisted flight direction of critical variables, such as airspeed, pitch and roll rates, angle of attack, and vertical flight path gradient, is the use of prominent rate-field movement along the edges of pictorial imaging displays. Rate-field movement (or apparent movement) can be achieved in many ways, such as "barber pole" displays, strips of streaming dots or bars, traveling sine waves, and moiré pattern generators, to name but a few. Several applications of the rate-field principle have been developed into commercially available flight instruments, and some have been tested (Swartzendruber, Ince, Williges, and Roscoe, 1971).

The chief advantages of rate fields as flight directors are that any movement from a steady motionless state attracts attention, and nulling the error-indicating motion is relatively easy if the required control action is to oppose the motion; it is far more difficult to learn to null an error by following the motion, and control reversals occur frequently. The rate field motion need not, and normally should

not, be linearly related to the magnitude of error; usually a logarithmic relationship is in order. Another advantage of rate fields as flight directors is that they can provide prominent, sensitive indications for at least three dimensions of control simultaneously without creating a cluttered appearing display or requiring any actual scales.

#### Program Phases

The research program conducted for ONR at the Aviation Research Laboratory was a combined effort in which computer assistance was applied to both aircraft controls and displays to reduce both pilot error and workload thereby increasing the aircraft-pilot system performance. The program consisted of two phases. The major efforts in Phase I were performed in a Link GAT-2 light twin-engine simulator. Phase II research was conducted exclusively in the Link GAT-2 simulator. The general program plan was to optimize computer-augmented controls used in a landing approach during Phase I and to optimize a computer-generated landing display during Phase II.

To anticipate the display research planned for Phase II, approximately one-third of the effort during Phase I was directed toward software and hardware modifications of the existing computer-generated landing display at the Aviation Research Laboratory and to experiments to determine cues essential in the approach to a landing. Likewise, approximately one-third of the effort during Phase II was devoted to modification and upgrading of the Phase I computer-augmented control system for use in connection with the computer-generated display system.

Phase I accomplishments. The main thrust of Phase I was to modify the existing performance control system used in the Link GAT-2 simulator at the Aviation Research Laboratory to allow investigations of various automated control modes used in the landing approach. These modifications apply the principle of reducing the control order to additional phases of flight involving changes in aircraft configuration. Based on a detailed analysis and computer simulation of the transitional flight modes in the complete landing approach, performance control modifications were designed to allow all transitions to occur smoothly.

Four related efforts took place during Phase I, the first of which was supported by the Air Force Office of Scientific Research and involved measurement of the effects of the existing PCS upon control precision and procedural compliance while pilots flew a complex three-dimensional area navigation mission in a Beechcraft Twin Bonanza. The second was a review of forward-looking pictorial displays and manual control augmentation systems (supported by ONR and reported by Roscoe, Eisele, and Bergman, 1975). The third involved hardware acquisitions and software modifications to the existing computer-generated display system in support of the fourth effort, a parametric experimental study of various combinations of visual cues in a static approach-to-landing scene (Eisele, Williges, and Roscoe, 1976).

The flight experiment served both as a partial validation of previous findings from simulator experiments by Kraus (Kraus and Roscoe, 1972; Roscoe and Kraus, 1973) and in addition revealed certain deficiencies and objectionable features of the existing PCS when vertical maneuvers are required during complex terminal area navigation procedures. System modifications to correct the deficiencies and eliminate the objectionable

features were determined and incorporated (Daly, Collins, and Ruby, 1975).

The hardware acquisitions and developments and the software modifications for the computer-generated display system also involved several parallel efforts during Phase I. The system now includes three major new elements: a matrix multiplier designed and developed by graduate student Robert A. Ruby; a raster scan converter designed and developed by graduate student Douglas J. Collins; and one commercial procurement, an Advent color TV projection system. With these additional elements, the display system in the GAT-2 is complete with respect to hardware.

Phase II accomplishments. The work remaining on the research facility during the first year of Phase II was the development, checkout, and experimental optimization of a computer software program to provide (1) the dynamic real-time imagery generation for a contact analog display of essential visual cues for landing (Artwick, 1976) and (2) a frequency-separated fast-time prediction of projected flight path (Gallaher, Hunt, and Williges, 1976). In parallel with the computer software development effort, a series of optimization pretests was conducted in the Link GAT-2/Raytheon 704 simulation facility to establish the specific ranges of values and time and scaling constants for the frequency-separated fast-time prediction of the projected flight path presentation to assure its compatibility with computer-augmented control.

Flight variables considered in these exploratory optimization studies included instantaneous flight path deviation from desired approach path, heading relative to runway orientation, vertical flight path angle,



horizontal and vertical rates of approach or departure to or from desired flight path, bank and pitch altitudes, roll and pitch rates and accelerations, aileron position, and prediction intervals and ranges as a function of distance to the touchdown aiming point. Subsequent formal experimental investigation of such a large number of variables over sufficient ranges of values no doubt would be facilitated by the use of an appropriate central composite RSM experimental design.

#### Application to Standard Mission Phases

The results of the research performed under this program are generalizable to a wide range of display and control system applications for future Naval aircraft. The practical embodiment of the various display principles formulated and tested in this and related programs at the Aviation Research Laboratory is illustrated in the series of figures that follow. Each shows an integrated computer-generated display configuration for a standard phase of a representative flight mission. Weapon delivery configurations, not shown, would appear essentially the same as the "Enroute Course and Altitude Intercept" display but with appropriate differences in guidance computations.

Although the display principles and symbolic configurations embodied in the illustrations have all received some form of experimental validation in one context or another, there has not been a systematic evaluation in a total-mission, integrated-system context. Such an evaluation would necessarily involve not only the measurement of absolute and comparative pilot performances of the individual flight and navigation tasks encountered in the various mission phases but also a similar consideration of the ease or difficulty of transitions from phase to phase and among the associated display and control modes.

Furthermore, although the use of rate-field motion as a primary means of flight-direction has received some formal experimental study, the few relevant experiments have not included a systematic determination of the most compatible direction of motion relationships or the range of motion rates that can be used effectively. Nor has there been any systematic consideration of the advantages or possible necessity of differential coding of rate-field configurations to prevent misidentification of what is being presented in each display mode. These and possibly other display and control system considerations will require systematic study prior to an eventual determination of total system effectiveness and acceptability.

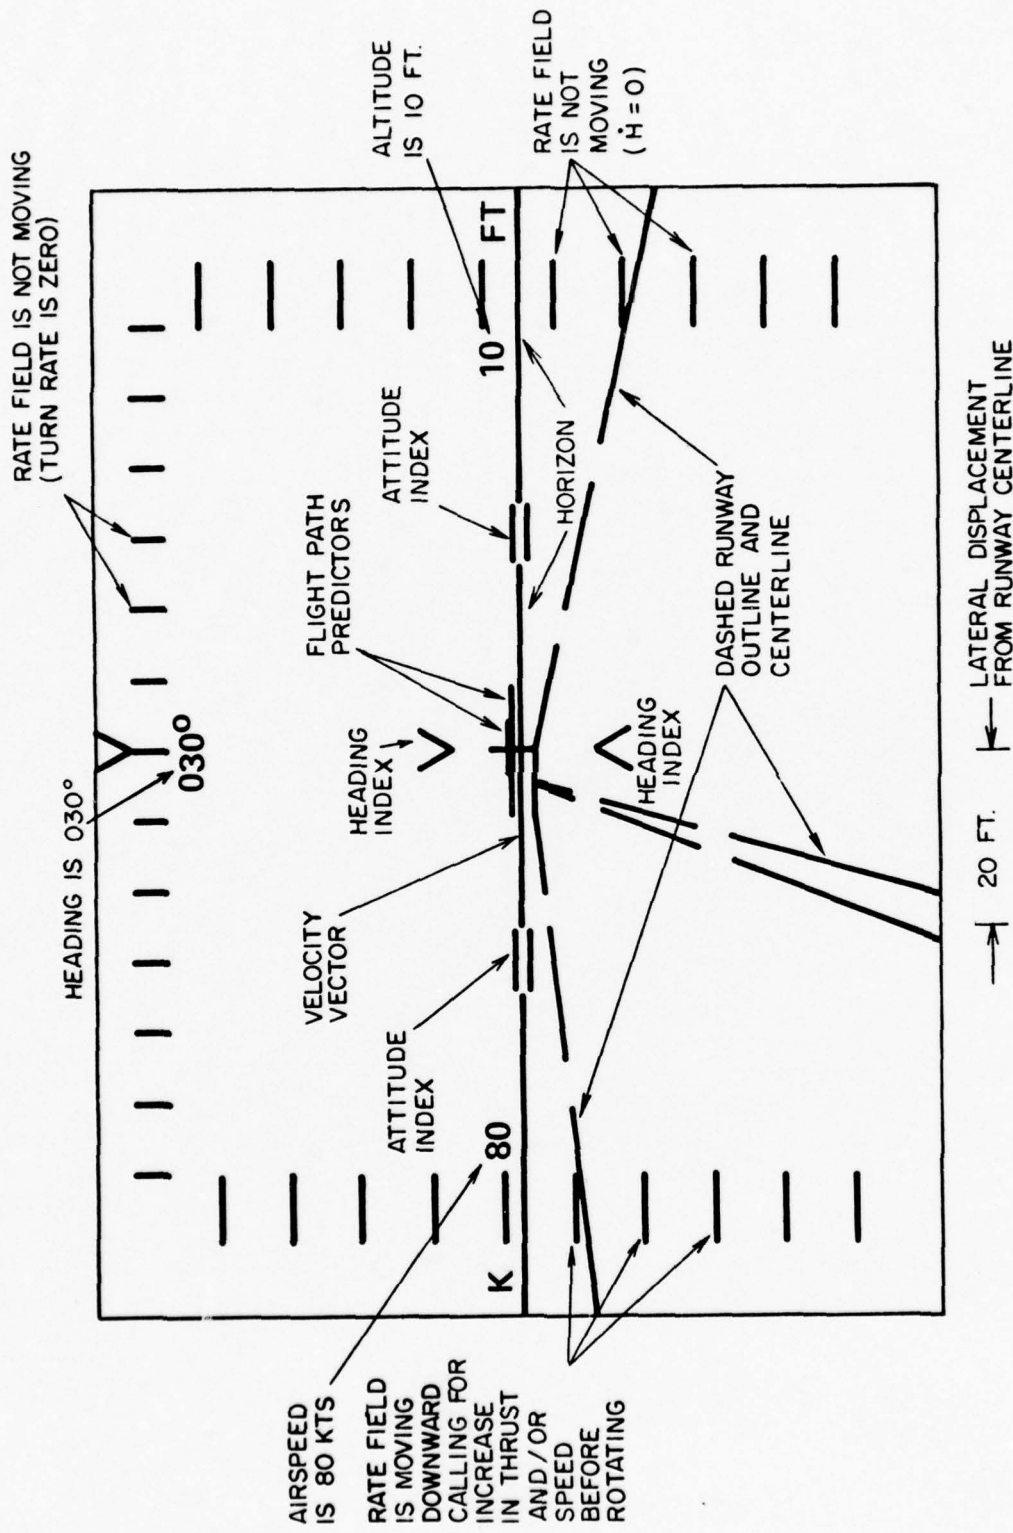


Figure 3. Takeoff roll before rotation.

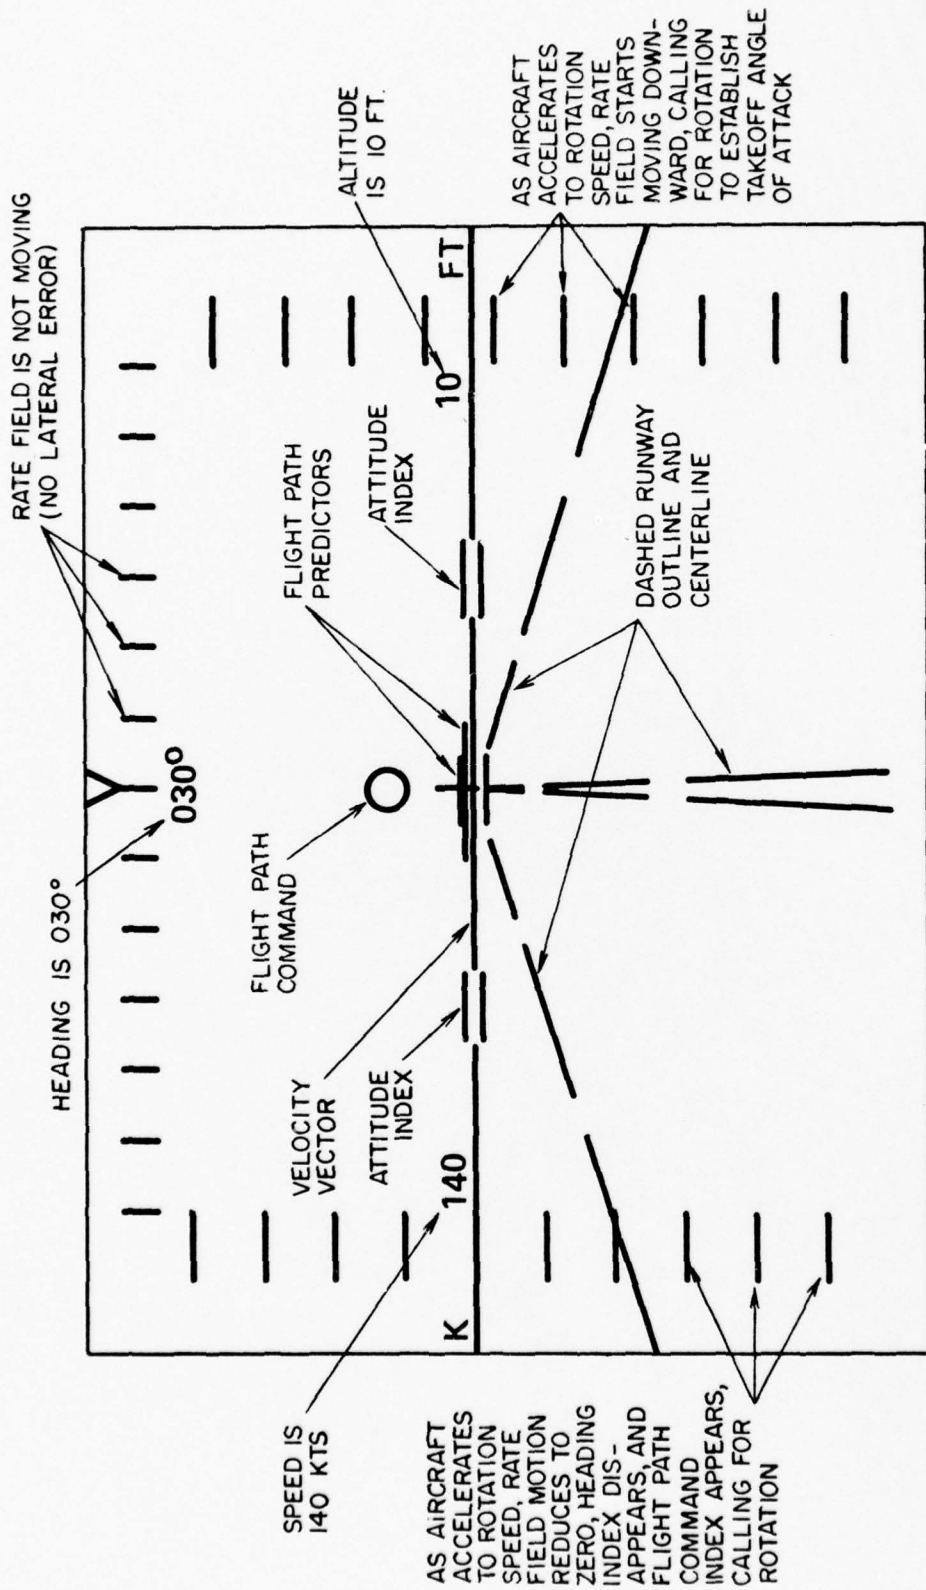


Figure 4. Takeoff roll immediately before rotation.

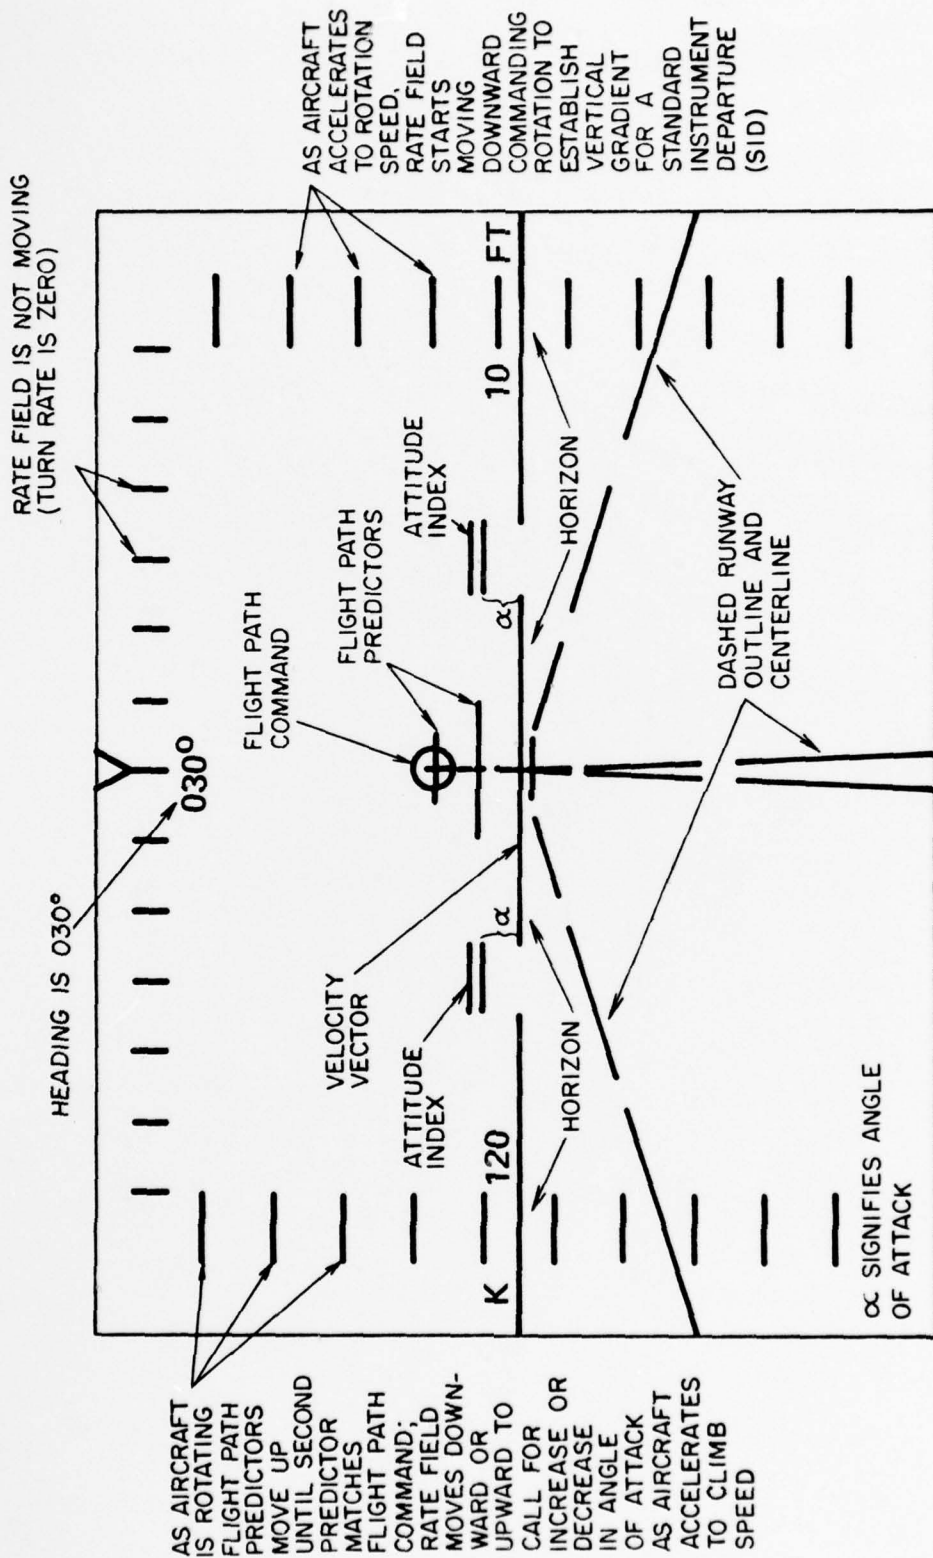


Figure 5. Takeoff roll during rotation but before liftoff.

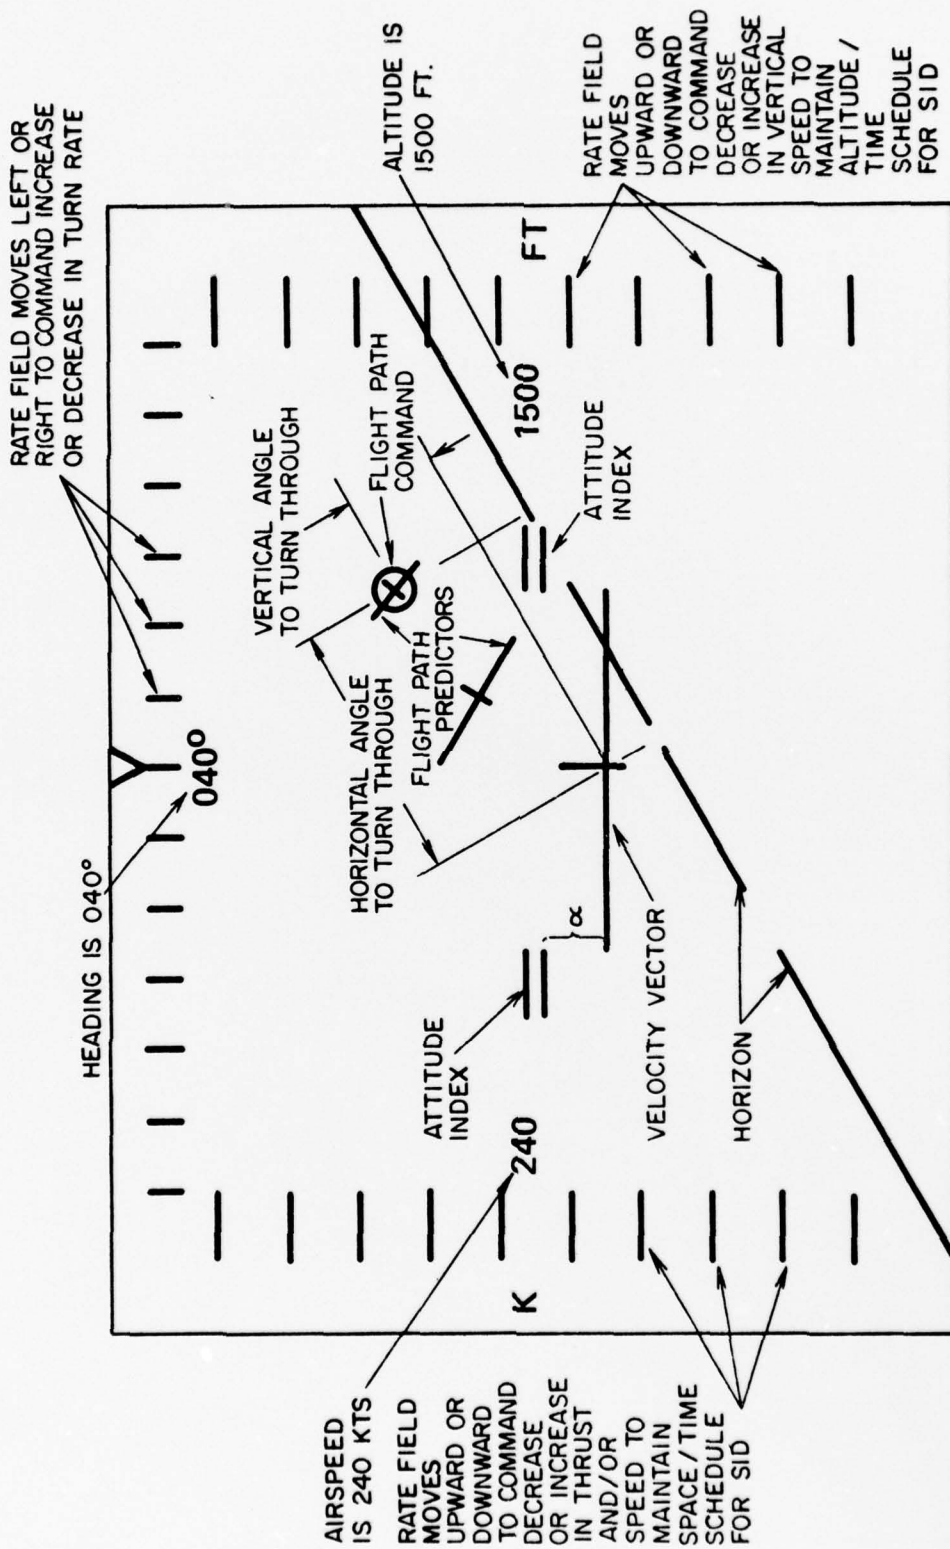


Figure 6. Standard instrument departure - climbing turn to command course and altitude.

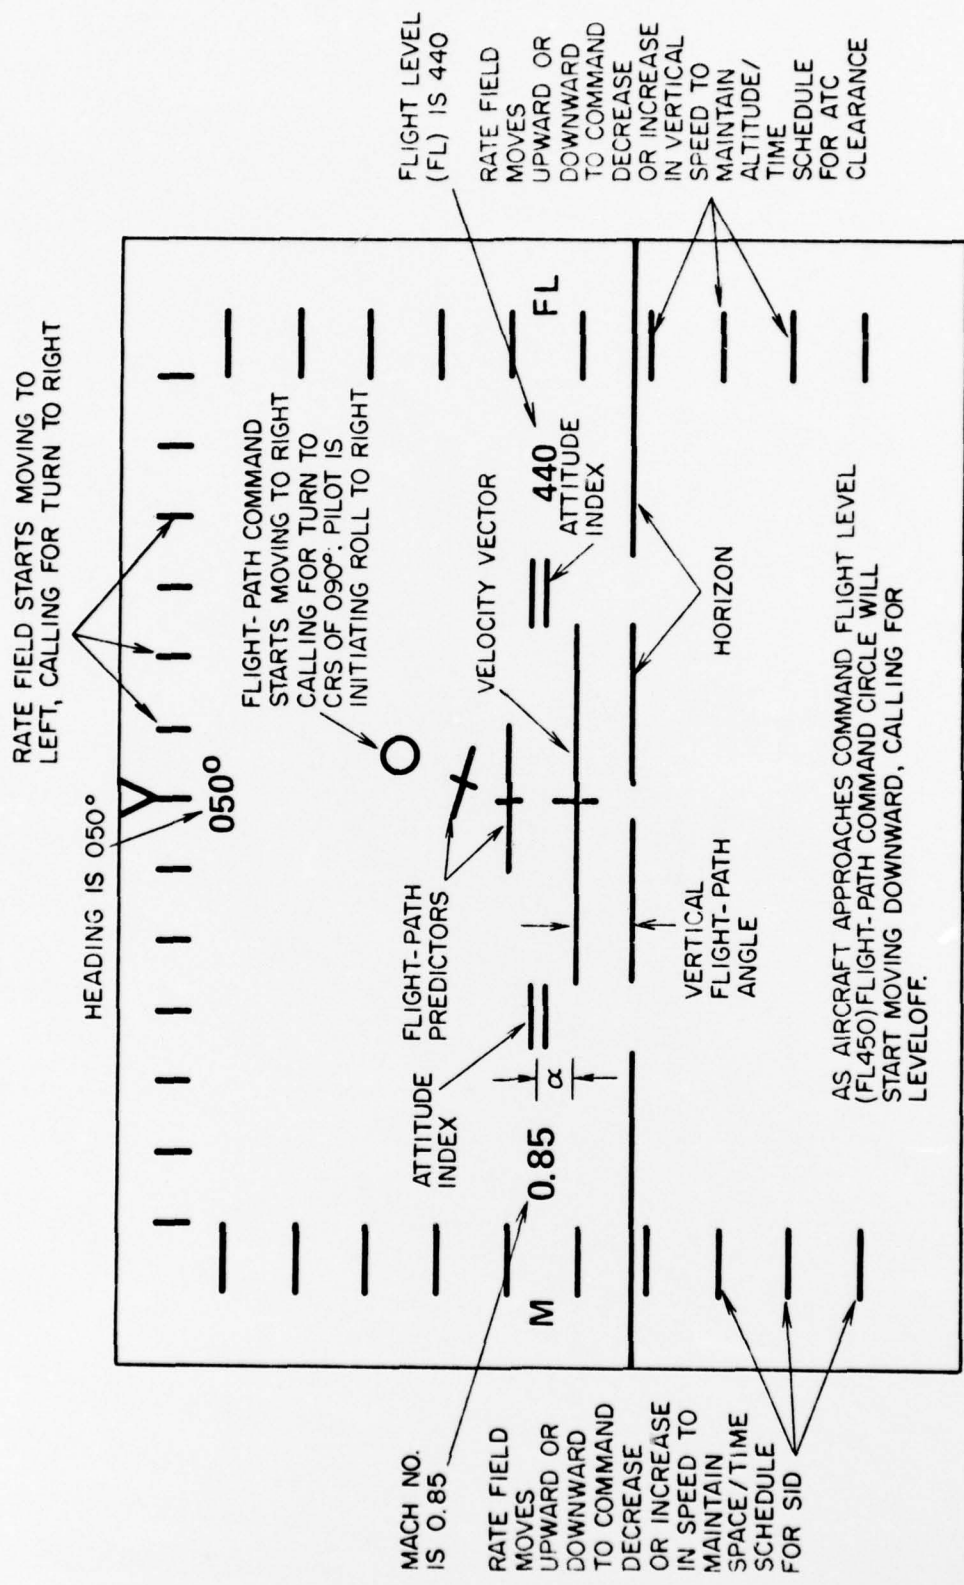


Figure 7. Enroute course and altitude intercept (or air-to-air intercept).

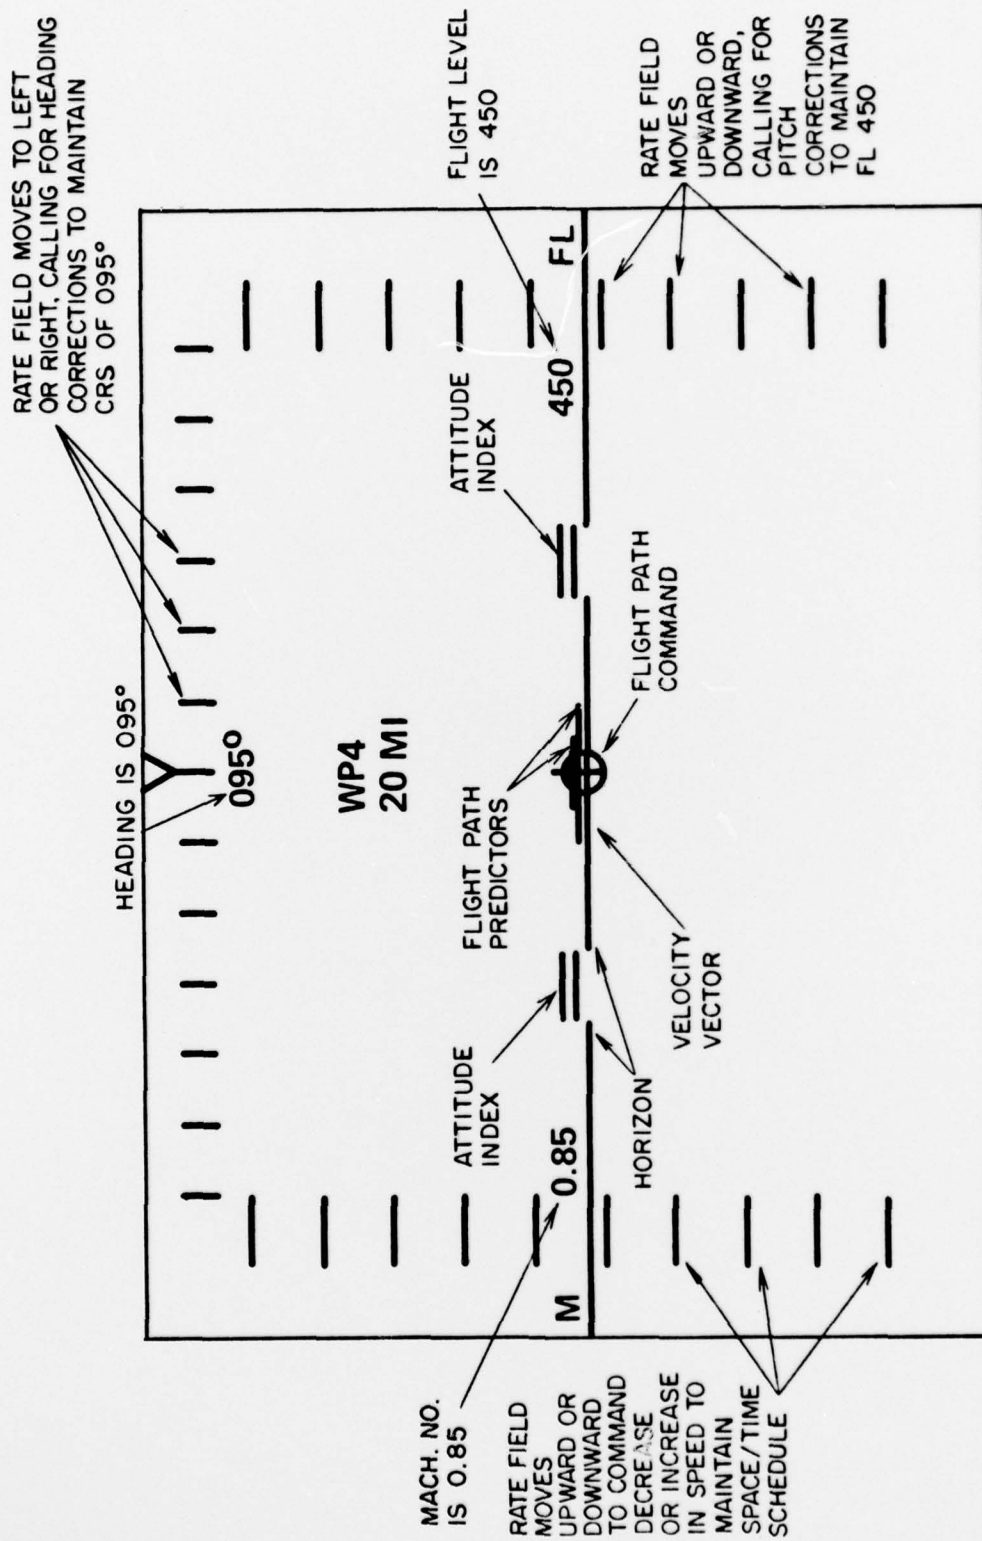


Figure 8. On-course cruise.



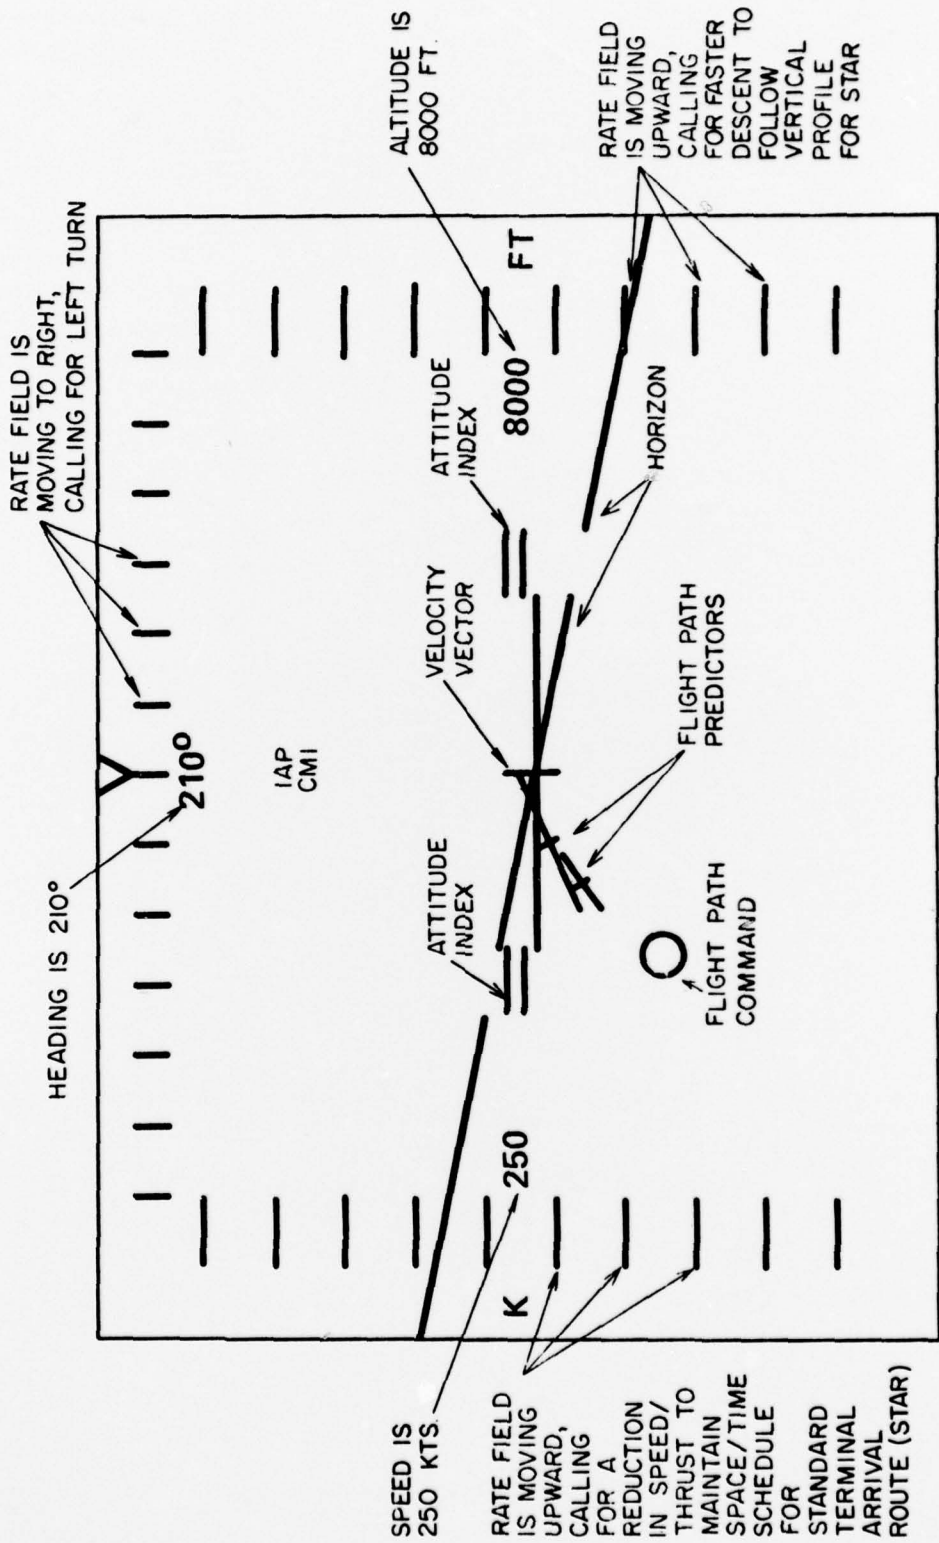


Figure 9. Entering descending turn from IAP (Initial Approach Point of "high gate") to FAF (Final Approach Fix or "low gate").

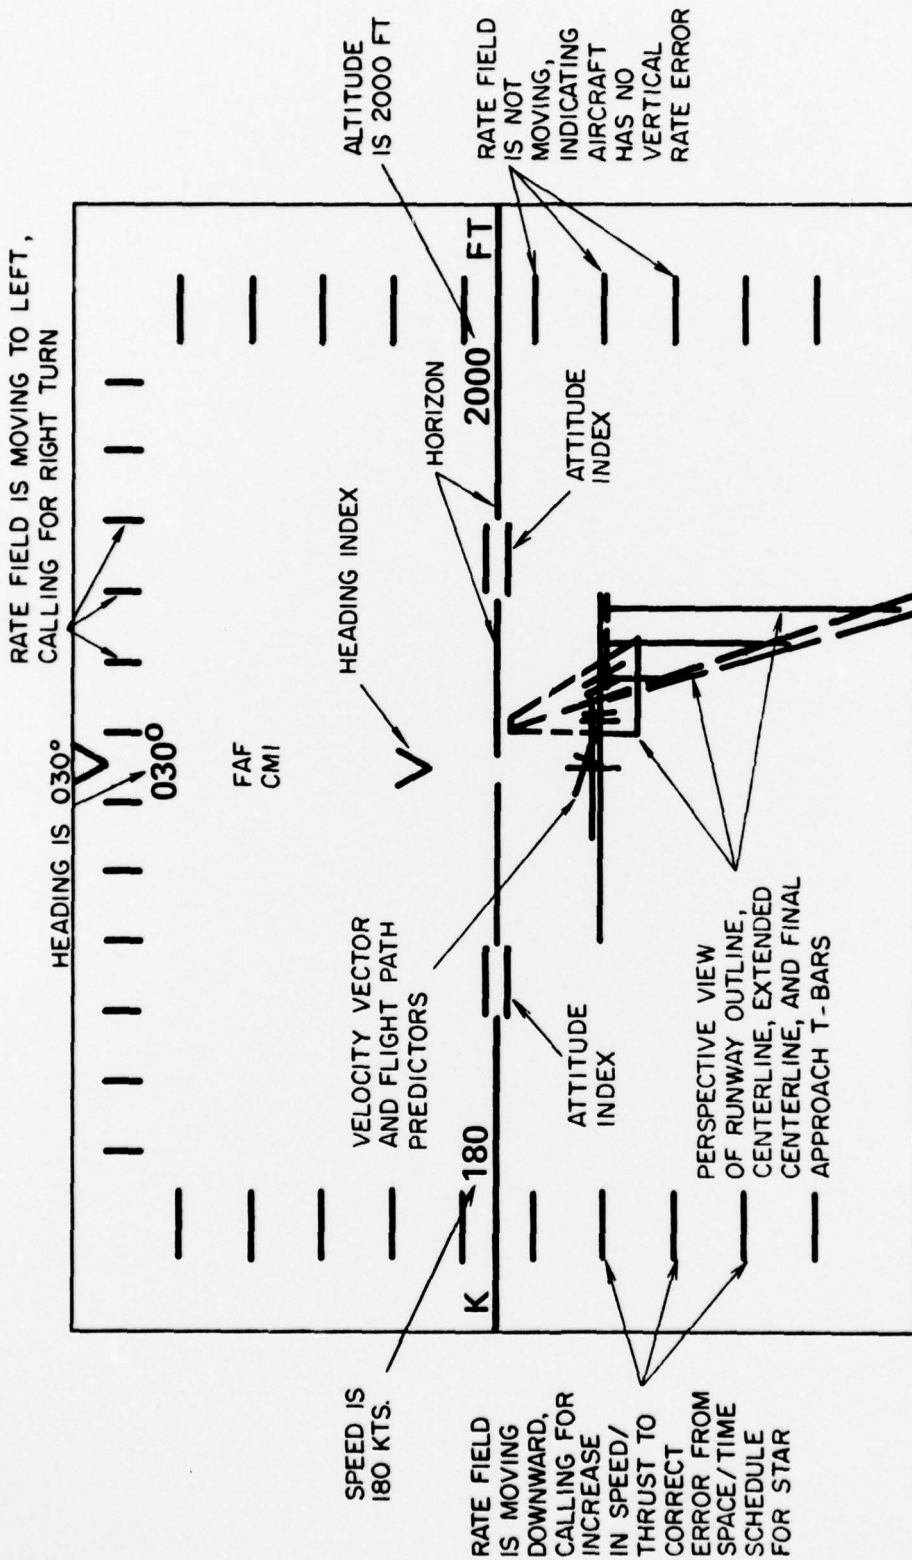


Figure 10. Entering final approach at FAF (low gate), on glide slope, left of localizer.

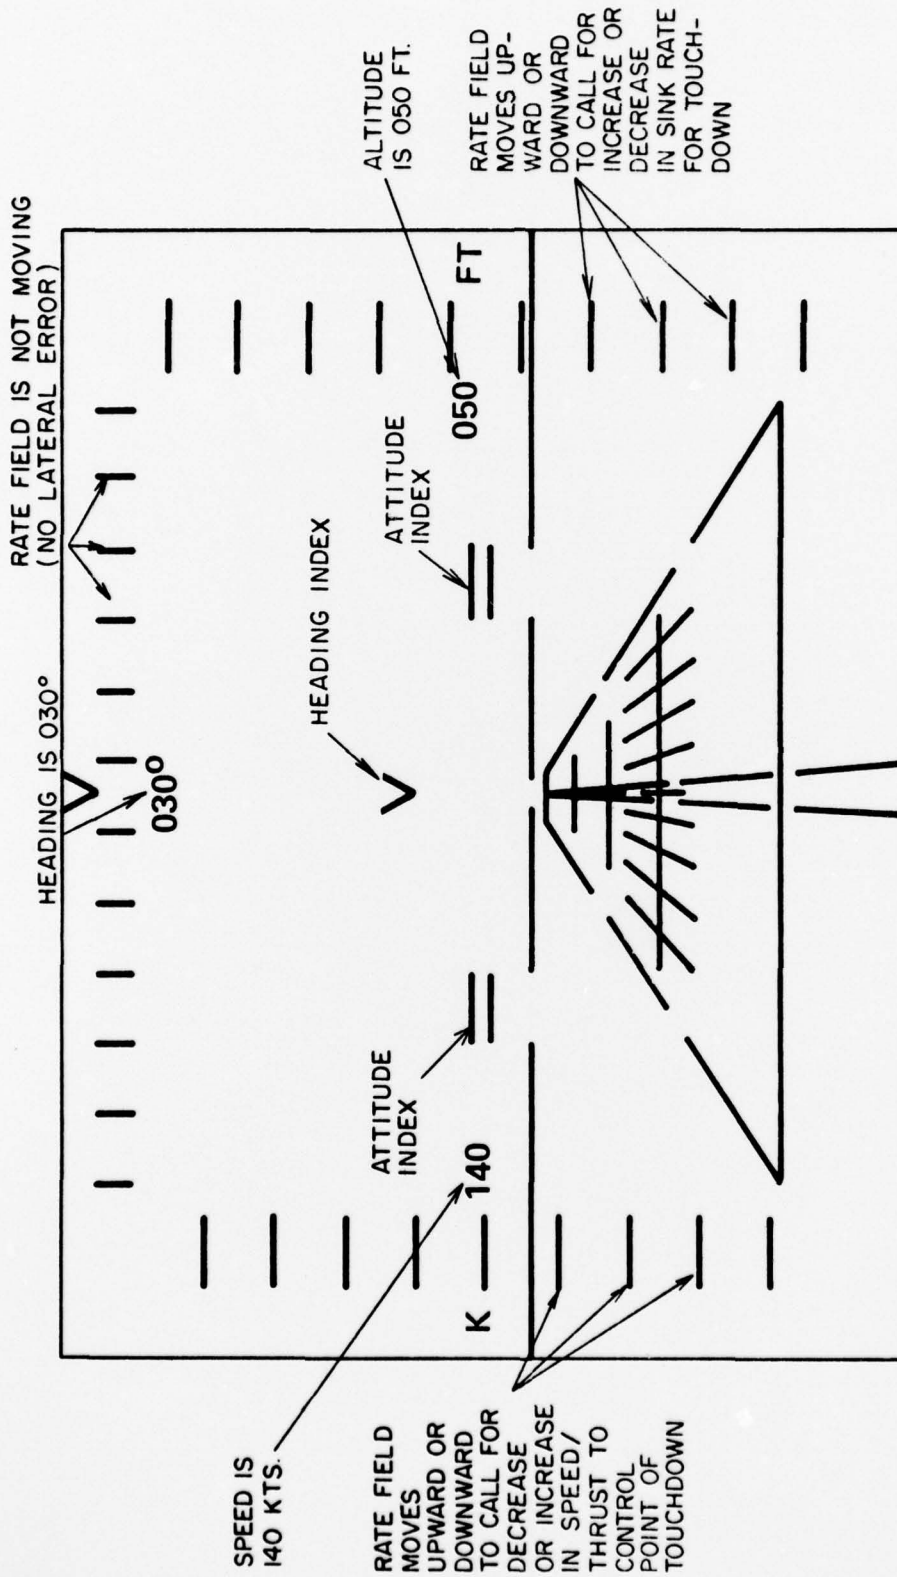


Figure 11. Initiation of flare on short final approach to landing.

SCIENTIFIC REPORTS ISSUED

---

Roscoe, S. N., Eisele, J. E., and Bergman, C. A. Advanced integrated aircraft displays and augmented flight control, Volume I. Scientific findings. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-75-12/ONR-75-2/I, 1975.

Daly, D., Collins, D. J., and Ruby, R. A. Advanced integrated aircraft displays and augmented flight control, Volume II: Appendices, Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-75-12/ONR-75-2/II, 1975.

---

This integrative report is divided into two volumes. Volume I introduces a classification of aircraft displays and controls, reviews problems that have plagued their evolution, and advances the pilot's task hierarchy as a conceptual framework within which available information can be abstracted, integrated, and applied to the design of displays and controls. In particular, Volume I constitutes a bringing together and integration of the findings from the various historical lines of investigation associated with quickening and unburdening, contact analog displays, predictor displays, frequency-separated displays, and performance control systems.

Volume II contains reports detailing the hardware efforts. Hardware specific to Phase II simulation and experimentation was designed, built, and installed. Volume II describes equipment necessary to continuing research on computer-augmented controls and computer-generated displays. Appendix A by Dennis W. Daly reports the design and installation of a digital control system for reduced order, decoupled control of an aircraft simulator. A real-time scan converter for computer-generated visual simulations is described by Douglas J. Collins in Appendix B. Another

hardware development applicable to computer-generated visual simulations, a peripheral device for linear coordinate transformation, is detailed by Robert A. Ruby in Appendix C.

---

Artwick, B. A. A versatile computer-generated dynamic flight display. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-76-5/ONR-76-1, 1976.

This report describes a real-time, dynamic, computer-driven visual display program which is written in the Fortran programming language. Versatility, efficiency, and ease of use are stressed in the software development, resulting in an easy to program dynamic display which can be implemented economically with a bare minimum of graphics hardware and a sixteen-bit mini-computer which has Fortran capabilities. Modular structure is stressed and speedup methods are discussed including the use of a matrix multiplier. A unique frame synthesizing feature is described in detail. Sample data base structures and display images conclude the report.

---

Gallagher, P. D., Hunt, R. A., and Williges, R. C. A regression approach to generate aircraft predictor information. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-76-11/ONR-76-2, 1976.

A predictor display shows the human operator future consequences of his immediate control inputs. A contact analog aircraft display is described in which an airplane-like predictor symbol depicts future

airplane position and orientation. The standard method for obtaining the predictor information is to use a complete, fast-time model of the controlled vehicle. An alternative approach is presented in this paper in which least-squares, first-order, linear approximations for each of the six degrees of freedom of aircraft motion are calculated. Thirteen variables representing changes in positions and rate of change of positions were selected as parameters for the prediction equations. Separate sets of equations were determined for 7, 14, and 21 seconds prediction times and continuous, one-second, and three-second control neutralization times. The advantages and disadvantages of this regression approach are discussed.

---

Eisele, J. E., Williges, R. C., Roscoe, S. N. The isolation of minimum sets of visual image cues sufficient for spatial orientation during aircraft landing approaches. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory, TR ARL-76-16/OAIR-76-3, 1976.

An experimental investigation of synthetic imaging displays was directed toward the isolation of minimum sets of visual cues sufficient for spatial orientation in ground-referenced aircraft landing approaches. Thirty-two flight instructors viewed static computer-generated airport scenes TV-projected onto a large screen viewed from the cockpit of a twin-engine general aviation trainer. Judgments of lateral and vertical deviations from a three-degree approach to landing aim point in the display were made to 32 combinations of four contact analog cues: runway outline,

runway touchdown zone, runway centerline, and ground plane texture; and one guidance cue: glidepath-localizer symbol. The views of each cue set were generated from 27 different positions in three-dimensional space. Dependent measures were response choice and response latency. The most accurate glidepath and course deviation judgments were made when the guidance cue glidepath was in the set. When only contact analog cues were present the best judgments of spatial orientation consistently were made when the runway outline was present. For a majority of the 27 spatial positions and 32 cue combination sets, the presence of a ground-plane texture grid increased the response latency and the probability of incorrect judgment.

REFERENCES

- Artwick, B. A. A versatile computer-generated dynamic flight display. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-76-5/ONR-76-1, 1976.
- Bergman, C. A. A computer program for the analysis of general control systems and aircraft longitudinal dynamics (PACS). Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory, Technical Report ARL-74-3/AFOSR-74-2, 1974.
- Bergman, C. A. An airplane performance control system: A flight experiment. Human Factors, 1976, 18, 173-181.
- Beringer, D. B., Williges, R. C., and Roscoe, S. N. The transition of experienced pilots to a frequency-separated aircraft attitude display: Human Factors, 1975, 17, 401-414.
- Birmingham, H. P. and Taylor, F. V. A design philosophy for a man-machine systems. Proceedings of the IRE, 1954, 42, 1748-1758.
- Carel, W. L. Pictorial displays for flight. Washington, D. C.: Office of Naval Research, JANAIR TR 2732.01/40, 1965.
- Daly, D., Collins, D. J., and Ruby, R. A. Advanced integrated aircraft displays and augmented flight control, Volume II: Appendices. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-75-12/ONR-75-2 /II, 1975.
- Eisele, J. E., Williges, R. C., Roscoe, S. N. The isolation of minimum sets of visual image cues sufficient for spatial orientation during aircraft landing approaches. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory, TR ARL-76-16/ONR-76-3, 1976.
- Gallaher, P. D., Hunt, R. A., and Williges, R. C. A regression approach to generate aircraft predictor information. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-76-11/ONR-76-2, 1976.
- Ince, F., Williges, R. C., and Roscoe, S. N. Aircraft simulator motion and the order of merit of flight attitude and steering guidance displays. Human Factors, 1975, 17, 388-400.
- Johnson, S. L. and Roscoe, S. N. What moves, the airplane or the world? Human Factors, 1972, 14, 107-129.



- Kelley, C. R. Manual and automatic control. New York: John Wiley, 1968.
- Kraus, E. F. and Roscoe, S. N. Reorganization of airplane manual flight control dynamics. Proceedings of the sixteenth annual meeting of the Human Factors Society, Santa Monica, Calif.: Human Factors Society, 1972, 117-126.
- Lebacqz, J. F. and Aiken, E. W. A flight investigation of control, display, and guidance requirements for decelerating, descending, VTOL instrument transitions using the X-22A variable stability aircraft. Buffalo, N. Y.: Calspan Corporation, AK5336-F-1, 1975.
- Richie, M. L. Preliminary studies of cockpit information content and equivalence of information in cockpit standby instrumentation. Grand Rapids, Mich.: Lear, Inc., Advanced Engineering Report 32, 1960.
- Roscoe, S. N. Airborne displays for flight and navigation. Human Factors, 1968, 10, 321-332.
- Roscoe, S. N. Man as a precious resource: The enhancement of human effectiveness in flight operations. Proceedings of the AIAA life sciences and systems conference. New York: American Institute of Aeronautics and Astronautics, 1974.
- Roscoe, S. N., Eisele, J. E., and Bergman, C. A. Advanced integrated aircraft displays and augmented flight control, Volume I: Scientific findings. Savoy, Ill.: University of Illinois at Urbana-Champaign, Aviation Research Laboratory TR ARL-75-12/ONR-75-2/I, 1975.
- Roscoe, S. N. and Kraus, E. F. Pilotage error and residual attention: The evaluation of a performance control system in airborne area navigation. Navigation, 1973, 20, 267-279.
- Roscoe, S. N. and Williges, R. C. Motion relationships in aircraft attitude and guidance displays: A flight experiment. Human Factors, 1975, 17, 374-387.
- Swartzendruber, L. E., Ince, F., Williges, R. C., and Roscoe, S. N. Two linear rate-field displays. Human Factors, 1971, 13, 569-575.
- Williams, A. C., Jr. Discrimination and manipulation in goal-directed instrument flight. Aviation Research Monographs, 1971, 1, 1-54. [Based on ONR Interim Report SDC 71-16-1, April 1947; Progress Report 6, December 1947; and Interim Report SDC 71-16-4, July 1949.]

OFFICE OF NAVAL RESEARCH, CODE 455  
TECHNICAL REPORTS DISTRIBUTION LIST

Director, Engineering Psychology  
Programs, Code 455  
Office of Naval Research  
800 North Quincy Street  
Arlington, VA 22217 (5 cys)

Defense Documentation Center  
Cameron Station  
Alexandria, VA 22314 (12 cys)

Dr. Robert Young  
Director, Cybernetics Technology Office  
Advanced Research Projects Agency  
1400 Wilson Blvd  
Arlington, VA 22209

Lt. Col. Henry L. Taylor, USAF  
OAD(E&LS) ODDR&E  
Pentagon, Room 3D129  
Washington, D.C. 20301

Office of Naval Research  
International Programs  
Code 102IP  
800 North Quincy Street  
Arlington, VA 22217 (6 cys)

Director of Technology  
Code 201  
Office of Naval Research  
800 North Quincy Street  
Arlington, VA 22217

Director, Avionics & Weapons  
Programs, Code 212  
Office of Naval Research  
800 North Quincy Street  
Arlington, VA 22217

Commanding Officer  
ONR Branch Office  
ATTN: Dr. J. Lester  
495 Summer Street  
Boston, MA 02210

Commanding Officer  
ONR Branch Office  
ATTN: Dr. Charles Davis  
536 South Clark Street  
Chicago, IL 60605

Commanding Officer  
ONR Branch Office  
ATTN: Mr. R. Lawson  
1030 East Green Street  
Pasadena, CA 91106

Dr. M. Bertin  
Office of Naval Research  
Scientific Liaison Group  
American Embassy, Room A-407  
APO San Francisco 96503

Director, Naval Research Laboratory  
Technical Information Division  
Code 2627  
Washington, D. C. 20375 (6 cys)

Mr. John Hill  
Naval Research Laboratory  
Code 5707.40  
Washington, D. C. 20375

Office of the Chief of Naval  
Operations, OP987P10  
Personnel Logistics Plans  
Department of the Navy  
Washington, D. C. 20350

Mr. Arnold Rubinstein  
Naval Material Command  
NAVMAT 0344  
Department of the Navy  
Washington, D. C. 20360

Commander  
Naval Air Systems Command  
Human Factors Programs, AIR 340F  
Washington, D. C. 20361

Commander  
Naval Air Systems Command  
Crew Station Design, AIR 5313  
Washington, D. C. 20361

Mr. T. Momiyama  
Naval Air Systems Command  
Advance Concepts Division, AIR 03P34  
Washington, D. C. 20361

Mr. George Tsaparas  
Naval Air Systems Command, AIR 340  
Washington, D. C. 20360

LCDR T. W. Schropp  
Naval Sea Systems Command  
NAVSEA 00C3  
Washington, D. C. 20362

LCDR R. Gibson  
Bureau of Medicine & Surgery  
Aerospace Psychology Branch  
Code 513  
Washington, D. C. 20372

Dr. George Moeller  
Human Factors Engineering Branch  
Submarine Medical Research Laboratory  
Naval Submarine Base  
Groton, CT 06340

Chief, Aerospace Psychology Division  
Naval Aerospace Medical Institute  
Pensacola, FL 32512

Dr. Lloyd Hitchcock  
Human Factors Engineering Department  
Crew Systems Division  
Naval Air Development Center  
Warminster, PA 18974

Bureau of Naval Personnel  
Special Assistant for Research  
Liaison  
PERS-OR  
Washington, D. C. 20370

Dr. Fred Muckler  
Navy Personnel Research and  
Development Center  
Manned Systems Design, Code 311  
San Diego, CA 92152

CDR Robert Kennedy  
Human Factors Engineering Branch  
Crew Systems Department  
Naval Air Development Center  
Johnsville  
Warminster, PA 18974

LCDR William Moroney  
Human Factors Engineering Branch  
Code 1226  
Pacific Missile Test Center  
Point Mugu, CA 93042

Mr. Ronald A. Erickson  
Human Factors Branch  
Code 3175  
Naval Weapons Center  
China Lake, CA 93555

Human Factors Section  
Systems Engineering Test Directorate  
U. S. Naval Air Test Center  
Patuxent River, MD 20670

Naval Training Equipment Center  
ATTN: Technical Library  
Orlando, FL 32813

Human Factors Department  
Code N215  
Naval Training Equipment Center  
Orlando, FL 32813

Dr. Gary Poock  
Operations Research Department  
Naval Postgraduate School  
Monterey, CA 93940

Dr. A. L. Slafkosky  
Scientific Advisor  
Commandant of the Marine Corps  
Code RD-1  
Washington, D. C. 20380

Mr. J. Barber  
Headquarters, Department of the  
Army, DAPE-PBR  
Washington, D. C. 20546

Technical Director  
U.S. Army Human Engineering Labs  
Aberdeen Proving Ground  
Aberdeen, MD 21005

U.S. Air Force Office of Scientific  
Research  
Life Sciences Directorate, NL  
Bolling Air Force Base  
Washington, D. C. 20332

Lt. Col. Joseph A. Birt  
Human Engineering Division  
Aerospace Medical Research Laboratory  
Wright Patterson AFB, OH 45433

Air University Library  
Maxwell Air Force Base, AL 36112

Dr. W. S. Vaughan  
Oceanautics, Inc.  
3308 Dodge Park Road  
Landover, MD 20785

Dr. Alphonse Chapanis  
The Johns Hopkins University  
Department of Psychology  
Charles & 34th Streets  
Baltimore, MD 21218

Dr. Robert R. Mackie  
Human Factors Research, Inc.  
Santa Barbara Research Park  
6780 Cortona Drive  
Goleta, CA 93017

Dr. Gershon Weltman  
Perceptronics, Inc.  
6271 Varie! Avenue  
Woodland Hills, CA 91364

Dr. H. D. Warner  
McDonnell-Douglas Astronautics  
Company-EAST  
St. Louis, MO 63166

Dr. J. W. Wulfeck  
New Mexico State University  
Department of Psychology  
Box 5095  
Las Cruces, NM 88003

Dr. H. Rudy Ramsey  
Science Applications, Inc.  
40 Denver Technological Center West  
7935 East Prentice Avenue  
Englewood, Colorado 80110

Dr. Ross L. Pepper  
Naval Undersea Center  
Hawaii Laboratory  
P. O. Box 997  
Kailua, Hawaii 96734

Dr. G. H. Robinson  
University of Wisconsin  
Department of Industrial Engineering  
1513 University Avenue  
Madison, WI 53706

Mr. E. M. Connelly  
Omnemii, Inc.  
410 Pine Street, S. E., Suite 200  
Vienna, VA 22180

Dr. Robert G. Pachella  
University of Michigan  
Department of Psychology  
Human Performance Center  
330 Packard Road  
Ann Arbor, MI 48104

Dr. Robert Fox  
Vanderbilt University  
Department of Psychology  
Nashville, TN 37240

Dr. Jesse Orlansky  
Institute for Defense Analyses  
400 Army-Navy Drive  
Arlington, VA 22202

Dr. Stanley Deutsch  
Office of Life Sciences  
HQS, NASA  
600 Independence Avenue  
Washington, D. C. 20546

Director, Human Factors Wing  
Defence & Civil Institute of  
Environmental Medicine  
Post Office Box 2000  
Downsville, Toronto, Ontario  
CANADA

Dr. A. D. Baddeley  
Director, Applied Psychology Unit  
Medical Research Council  
15 Chaucer Road  
Cambridge, CB2 2EF  
ENGLAND

Dr. David Zaidel  
Road Safety Centre Technion City  
Haifa  
ISRAEL

Dr. John Adolfson  
Naval Staff  
S100 14 Stockholm 100 SWEDEN