


TR 77-1

Wave Climate at Selected Locations Along U.S. Coasts

by

Edward F. Thompson

TECHNICAL REPORT NO. 77-1 JANUARY 1977

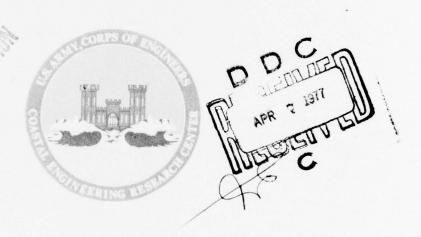

Approved for public release; distribution unlimited.

AD NO. DDC FILE COPY

U.S. ARMY, CORPS OF ENGINEERS COASTAL ENGINEERING RESEARCH CENTER

Kingman Building Fort Belvoir, Va. 22060 Reprint or republication of any of this material shall give appropriate credit to the U.S. Army Coastal Engineering Research Center.

Limited free distribution within the United States of single copies of this publication has been made by this Center. Additional copies are available from:

> National Technical Information Service ATTN: Operations Division 5285 Port Royal Road Springfield, Virginia 22151

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE	BEFORE COMPLETING FORM
A	O. 3. RECIPIENT'S CATALOG NUMBER
TR 77-1 (14) CERC-TR-177-1	
TITLE (and Subtitle)	5, TYPE OF REPORT & PERIOD COVERED
WAVE CLIMATE AT SELECTED LOCATIONS ALONG U.S. COASTS	Technical Report
0.0.	6. PERFORMING ORG. REPORT NUMBER
Edward F. Thompson	8. CONTRACT OR GRANT NUMBER(*)
Department of the Army Coastal Engineering Research Center (CERRE-OC) Kingman Building, Fort Belvoir, Virginia 22060	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Department of the Army Coastal Engineering Research Center Kingman Building, Fort Belvoir, Virginia 22060	12. REPORT DATE January 977 13. NUMBER OF PAGES 364
4. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)) 15. SECURITY CLASS. (of this report)
	UNCLASSIFIED
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
5. DISTRIBUTION STATEMENT (of this Report)	
7. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different	from Report) [E.C. D. L.
8. SUPPLEMENTARY NOTES	Micoso
 KEY WORDS (Continue on reverse side if necessary and identify by block numb 	er)
Atlantic coast Wave analysis Pacific coast Wave climate Gulf coast Wave gages	Wave heights Wave periods Wave records
D. ABSTRACT (Continue on reverse side if necessary and identify by block number	or)
Since 1948, the Coastal Engineering Research decessor, the Beach Erosion Board (BEB) have gath coastal locations. Staff and pressure-sensitive were used to obtain the data; a few gages were of Wave records were initially 7-minute pen and ink day, but more recently, 1,024-second digital receiptour times daily have been used to determine significant.	h Center (CERC) and its pre- hered wave data from U.S. gages, generally shore-based, perated at offshore locations. records taken six times a ords on magnetic tape taken
	(Continued)
D FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE	INCLASSIETED

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)		
periods. Summaries of significant heights and periods for 19 gage locations provide useful information on ranges, and annual and seasonal variations of wave climate.		

PREFACE

This report is published to provide coastal engineers and coastal researchers with summaries of nearshore wave measurements from 19 locations along the Atlantic, gulf, and Pacific coasts. The work was carried out under the wave measurement program of the U.S. Army Coastal Engineering Research Center (CERC).

This report was prepared by Edward F. Thompson, Hydraulic Engineer, under the supervision of Dr. D. Lee Harris, Chief, Oceanography Branch.


The success of the CERC wave measurement program has been a result of the efforts of many people involved with the program since 1948. The assistance provided by Dr. Harris in the planning and preparation of this report is greatly appreciated. Particular recognition is given to the following people who designed, built, installed, and maintained the wave gages and associated electronics: C.M. Hare, F.W. Kellum, N.F. Lang, E.A. Maiolatesi, W.E. Robertson, C.H. Shepherd, Jr., and L.C. Williams.

Comments on this publication are invited.

Approved for publication in accordance with Public Law 166, 79th Congress, approved 31 July 1945, as supplemented by Public Law 172, 88th Congress, approved 7 November 1963.

JOHN H. COUSINS

Colonel, Corps of Engineers Commander and Director



CONTENTS

	CONVENCION PACTORS II S SUSTEMARY TO METRIC (ST)	Page
	CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI)	7
I	INTRODUCTION	9
11	NEARSHORE WAVE CHARACTERISTICS AT THE GAGES	11
III	WAVE GAGES AND RECORDERS	20
	 Wave-Gage Types	20
	2. Comparison of Gage Types	22
	3. Wave Recorders	23
	4. Gage and Recorder Problems	27
IV	ANALYSIS OF PEN AND INK WAVE RECORDS	28
	1. Introduction	28
	2. Analysis Methods for Pen and Ink Wave Records3. Comparison of Pen and Ink Record Analysis	28
	Methods	29
	rections	2.5
V	ANALYSIS OF DIGITAL WAVE RECORDS	30
VI	COMPARISON OF RESULTS FROM SIMULTANEOUS DIGITAL AND	
	PEN AND INK RECORDS	33
	1. Introduction	33
	2. Description of Data Sample	34
	3. Comparison of Results	34
	4. Summary of Comparisons between Simultaneous	0,
	Digital and Pen and Ink Records	51
VII	COMPARISON OF WAVE CLIMATE FROM DIGITAL AND PEN AND	
	INK RECORDS	51
	LITERATURE CITED	56
PPENDIX		
A	EXPLANATION OF SUMMARIES OF SIGNIFICANT HEIGHT AND	
	PERIOD	59
	A-1 SIGNIFICANT WAVE HEIGHT AND PERIOD SUMMARIES.	
	U.S. ATLANTIC COAST	64
	O.O. ATLANTIC COADI	
	A-2 SIGNIFICANT WAVE HEIGHT AND PERIOD SUMMARIES,	
	U.S. GULF COAST	228
	A-3 SIGNIFICANT WAVE HEIGHT AND PERIOD SUMMARIES,	
	U.S. PACIFIC COAST	273
В	PROCEDURE FOR ANALYSIS OF WAVE DATA FROM 7-MINUTE	
	PEN AND INK RECORDS	361

CONTENTS

TABLES

		Page
1	Wave period resolution of the CERC procedure for analyzing digital wave records	33
2	Comparison of significant wave height estimates from digital and pen and ink records, Savannah Light Tower, Georgia, September 1971 to April 1972	35
3	Correlation between significant wave estimates from digital and pen and ink records taken during September 1971 to April 1972	37
4	Comparison of significant wave height estimates from digital and pen and ink records at Wrightsville Beach, North Carolina, September 1971 to April 1972	38
5	Comparison of wave period estimates from digital and pen and ink records, Savannah Light Tower, Georgia, September 1971 to April 1972	42
6	Comparison of significant wave height statistics from digital and pen and ink records taken during September 1971 to April 1972	46
7	Comparison of wave period statistics from digital and pen and ink records taken during September 1971 to August 1972	48
	FIGURES	
1	BEB-CERC wave gage locations	10
2	Aerial photo of several wave trains along the California coast north of Pt. Mugu, 9 August 1973	12
3	Example of energy spectra from the CERC gage at Atlantic City, New Jersey	13
4	Example of energy spectra from the CERC gage at Naples, Florida	15
5	Example of energy spectra from the CERC gage at Huntington Beach, California	17
6	Aerial photo showing superimposed trains of sea and swell waves south of Port Hueneme, California, 3 August 1960	19
7	Comparison of root-mean-square (RMS) sea surface elevations from pressure- and step-resistance gage records with those from continuous-wire gage records	23

CONTENTS

	rigurescontinued	,	Do ~0
8	Oblique photo of step-resistance gage near Chesapeake Beach, Maryland		Page 24
9	Examples of wave records from Lake Worth, Florida, 27 January 1966, and Nags Head, North Carolina, 15 April 1975		25
10	Example of wave record from Wrightsville Beach, North Carolina, 27 May 1972		26
11	Shallow-water wave profile for $H/L_{\mathcal{O}}$ = 0.0117 and $D/L_{\mathcal{O}}$ = 0.010		39
12	Example of wave record from Savannah Light Tower, Georgia, 29 May 1972		41
13	Example of wave record from Savannah Light Tower, Georgia, 22 September 1971		43
14	Example of wave record from Savannah Light Tower, Georgia, 27 May 1972		45
15	Comparison of distribution functions of significant wave height estimated from digital and pen and ink records taken during September 1971		49
16	Comparison of distribution functions of wave period estimated from digital and pen and ink records taken during September 1971 to April 1972		50
17	Annual means and standard deviations of significant wave height from 19 gage locations		53
18	Annual means and standard deviations of significant wave		54

CONVERSION FACTORS, U. S. CUSTOMARY TO METRIC (SI) UNITS OF MEASUREMENT

U.S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	by	To obtain
inches	25.4	millimeters
	2.54	centimeters
square inches	6.452	square centimeters
cubic inches	16.39	cubic centimeters
feet	30.48	centimeters
	0.3048	meters
square feet	0.0929	square meters
cubic feet	0.0283	cubic meters
yards	0.9144	meters
square yards	0.836	square meters
cubic yards	0.7646	cubic meters
miles	1.6093	kilometers
square miles	259.0	hectares
knots	1.8532	kilometers per hour
acres	0.4047	hectares
foot-pounds	1.3558	newton meters
millibars	1.0197×10^{-3}	kilograms per square centimeter
ounces	28.35	grams
pounds	453.6	grams
	0.4536	kilograms
ton, long	1.0160	metric tons
ton, short	0.9072	metric tons
degrees (angle)	0.1745	radians
Fahrenheit degrees	5/9	Celsius degrees or Kelvins ¹

¹ To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use formula: C = (5/9) (F -32). To obtain Kelvin (K) readings, use formula: K = (5/9) (F -32) ± 273.15 .

WAVE CLIMATE AT SELECTED LOCATIONS ALONG U.S. COASTS

by Edward F. Thompson

I. INTRODUCTION

In support of its mission to conduct research on coastal phenomena of engineering importance, the Coastal Engineering Research Center (CERC) and its predecessor, the Beach Erosion Board (BEB) have operated wave gages in the nearshore environment for more than 25 years. The results of this effort provide the coastal researcher and the coastal engineer with important data on waves arriving at U.S. coasts in response to a variety of meteorological conditions; however, an equally important result is the specification of the annual and seasonal significant wave height and period climate at various coastal locations.

Knowledge of the ocean wave climate is important for planning coastal operations, estimating coastal sediment movement, designing coastal structures, and for other applications. However, because recording and analyzing reliable wave climate data are expensive and time consuming, there is a paucity of field wave data. Thus, the primary purpose of this report is to present summaries of significant heights and periods from the BEBCERC field wave-gaging program at the 19 locations shown in Figure 1. A secondary purpose is to provide details and a perspective on the various wave measurement, recording, and analysis systems used by BEB-CERC. Similar wave-gaging programs are ongoing in shallow water along the southern California coast (Seymour, et al., 1976) and in deep water along Canadian coasts (Wilson and Baird, 1972).

Although there is presently no suitable substitute for accurate near-shore wave measurements, data obtained from the gages must be carefully interpreted. The waves being measured must be considered: Are the waves breaking or have they already broken? For surface gages, are these deepwater waves not yet affected by refraction and shoaling? These questions are discussed in Section II.

Aside from the variability of the waves being measured, the ability of the wave recording and analysis system to translate the waves in nature into accurate and useful results must be evaluated. Several important problems in the BEB-CERC system were probably unavoidable in a wave recording and analysis system under development for two decades. Different gage types, recording schemes, and methods for analyzing wave records have been used. Also, many gaps exist in the recording sequences. Each of these factors can introduce biases in the summarized data.

Three basic wave gages have been used in the BEB-CERC wave data collection program: Two staff gages (the step-resistance gage and the continuous-wire gage) and an underwater pressure-sensitive gage. The gages and the wave recording schemes used are discussed in Section III.



Figure 1. BEB-CERC wave gage locations.

The state of the s

Data recording and analysis techniques are discussed in Sections IV, V, and VI. Section IV discusses the different methods used by CERC for analyzing pen and ink records; Section V discusses the recording and spectral analysis of CERC's digital wave records on magnetic tape. In Section VI, significant wave heights and periods obtained from pen and ink records are compared with results from digital records.

The dependence of annual wave summaries on data analysis techniques and coastal location is described in Section VII.

The contents and format of the summaries of significant wave height and period are explained in Appendix A. Most summarized data were obtained with staff gages ranging from 4.6 to 13.7 meters (15 to 45 feet) in length and mounted on or near the seaward end of a pier. The ocean bottom at the gages ranged from 4 to 30 meters (13 to 100 feet) below mean sea level (MSL); however, none of the shore-based gages were in water deeper than 7.6 meters (25 feet).

The summaries, including results from both digital and pen and ink data, are presented in Appendix A for locations on the Atlantic coast, the gulf coast, and the Pacific coast.


II. NEARSHORE WAVE CHARACTERISTICS AT THE GAGES

Waves traveling from deep water into shallow water are modified by such processes as refraction, shoaling, and reflection. When several wave trains with different frequencies are present, these modifications can be complex. In such cases, energy transfer between wave trains can also be important.


Several different wave trains, each with a different wavelength and coming from a different, clearly defined direction, are usually visible in clear aerial photos of coastal waves. The photos often show short, choppy sea waves superimposed on several trains of long, regular swell waves. An example of multiple wave trains is shown in Figure 2.

Energy spectra obtained from CERC gages support the hypothesis that several wave trains with different energy and frequency are common (Thompson, 1974; McClenan and Harris, 1975). Examples from the Atlantic, gulf, and Pacific coasts are shown in Figures 3, 4, and 5. These data also indicate that occassionally, finely tuned unimodal spectra do occur.


Aerial photos of good quality are useful for observing wave modification and often show a remarkable change in the relative dominance of different frequency wave trains as the waves move into very shallow water nearshore. Some low-frequency wave trains which are nearly invisible offshore amidst higher frequency waves, have been observed to increase in prominence very nearshore to the point that, in the breaker zone, the train totally dominates the shorter waves present (Harris, 1972a; McClenan and Harris, 1975; U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1975, p. 3-4). This phenomenon is shown in Figure 6.

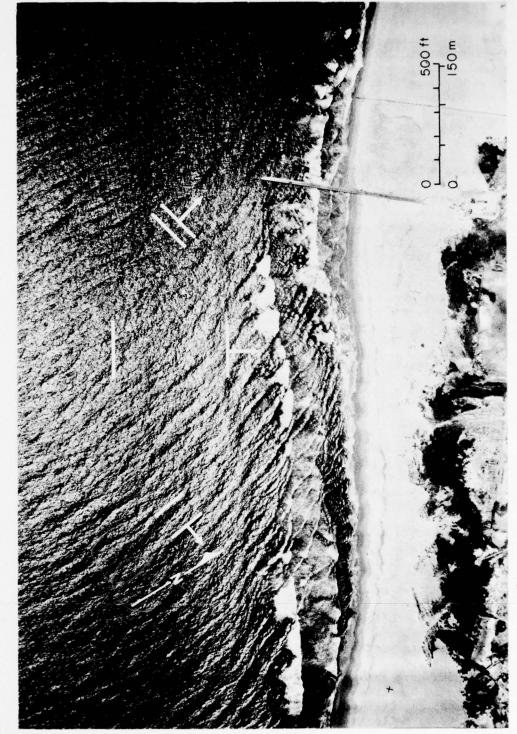


BEST AVAILABLE COPY

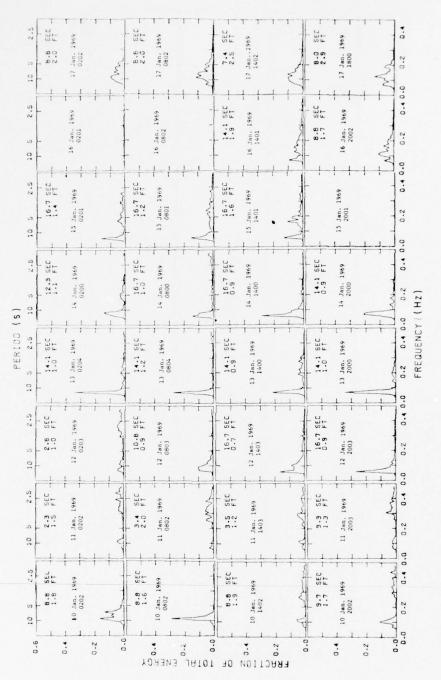


Example of energy spectra from the CERC gage at Atlantic City, New Jersey. Significant wave height and period estimates are given in the upper part of each spectrum. 3 Figure

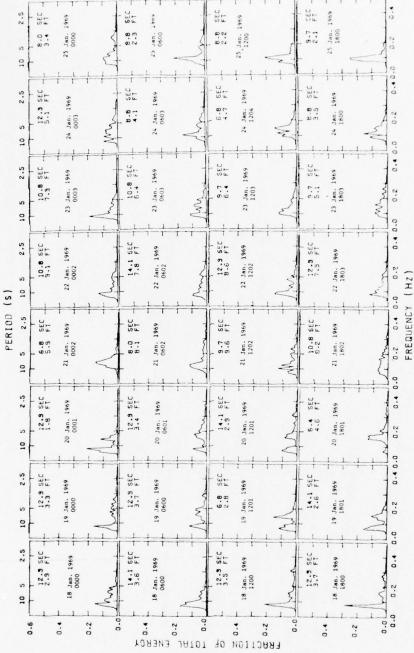


Example of energy spectra from the CERC gage at Atlantic City, New Jersey. --Continued

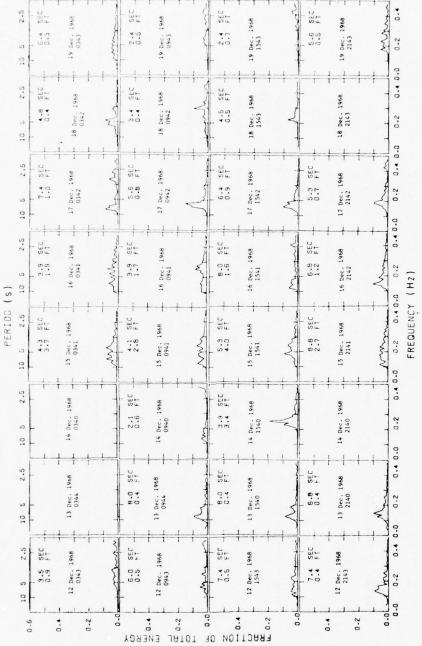


Significant wave height and period estimates are given in the upper part of each spectrum Example of energy spectra from the CERC gage at Naples, Florida. Figure 4.

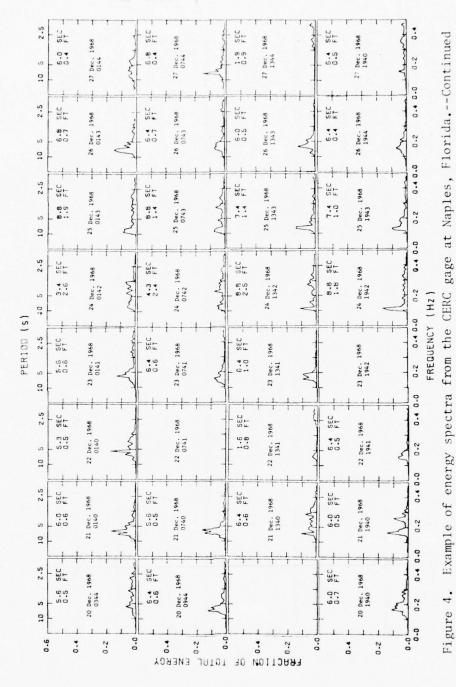

BEST AVAILABLE COPY

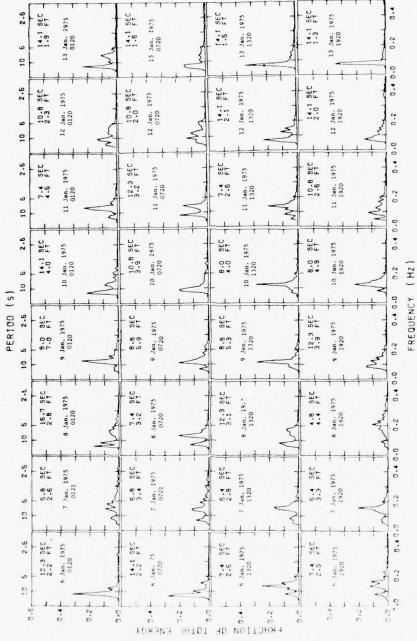

Example of energy spectra from the CERC gage at Huntington Beach, California. Significant wave height and period estimates are given in the upper part of each spectrum. 5 Figure

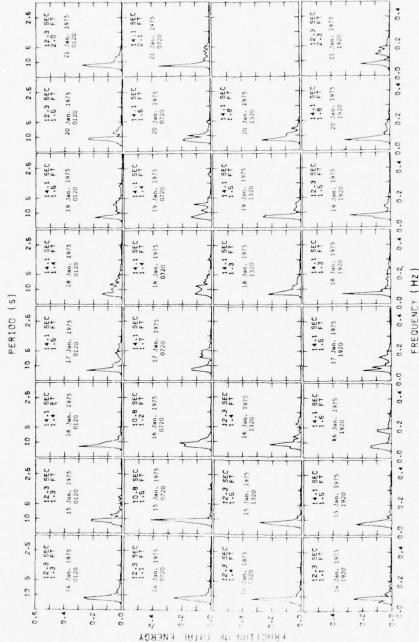

Example of energy spectra from the CERC gage at Huntington Beach, California. --Continued Figure 5.

THE R. P. LEWIS CO., LANSING, MICH.



Aerial photo showing superimposed trains of sea and swell waves south of Port Hueneme, California, on 3 August 1860. The train of swell waves is nearly invisible offshore but is dominating the breaker sone.

Since offshore bottom topography, coastal exposure, and local currents are different at every coastal location, the coastal wave climate can also differ. Wave height can vary considerably, particularly alongshore between points on a given nearshore depth contour (Harris, 1972a; McClenan and Harris, 1975; U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1975, pp. 2-65 to 2-77; p. 2-112). This variability is expected to be small for short distances along a coastal area with relatively uniform topography and exposure.

Wave frequency can usually be considered unchanged as waves move into shallow water; aerial photos generally indicate no loss of integrity of waves during the refraction and shoaling processes. However, in some situations, a wave in shallow water can break down into several shorter waves (Galvin, 1972; McClenan and Harris, 1975).

Wave frequency, as determined from a measurement point fixed in space, can also be modified by local currents. A current opposing the waves decreases the frequency; a following current increases the frequency.

The placement of wave gages by BEB-CERC has been limited by practical considerations. Since staff gages require a rigid mounting structure, most BEB-CERC staff gages have been located near the seaward end of ocean piers to gain optimum exposure to waves from different directions and to keep the gages seaward of the breakers for most wave conditions. However, most waves reaching the gages have been appreciably altered by bottom effects. At times, waves arriving at a gage have already negotiated an offshore bar seaward of the pier on which the gage is mounted; occasionally, high waves break seaward of the gage.

Ocean waves measured at the gages are rarely either deepwater waves or breakers; however, accurately measured and properly interpreted, the waves provide a good indication of the wave frequencies and wave heights approaching shore.

III. WAVE GAGES AND RECORDERS

Wave-Gage Types.

a. Step-Resistance Gage. Most step-resistance gages used in the wave-gaging program at BEB and initially at CERC, were designed and fabricated at BEB (Williams, 1969). These gages used electrical contact points along the staff to sense water surface elevations. The contact points are embedded, usually at 0.06-meter (0.2-foot) intervals, in 1.5-meter-long (5-foot) epoxy resin sections which are designed to slide easily into a steel or aluminum H-beam frame securely clamped to a piling, steel pipe, or other rigid support.

Step-resistance gages are classified as spark plug, parallel, or relay types, and are all similar in appearance. The spark plug type was used only in the beginning of the BEB wave-gaging program. The parallel type has been developed for use in saltwater of fairly constant salinity.

The relay type is designed for use in either saltwater, freshwater, or water of highly variable salinity.

b. Continuous-Wire Gage. The continuous-wire gage now used by CERC is a type manufactured by the Baylor Company, Sugar Land, Texas, and consists of two parallel stainless-steel cables in tension, spaced about 23 centimeters (9 inches) apart. Braces at both ends of the cables are firmly attached to a rigid support. Spacers are usually placed at intermediate points along the cables to ensure proper separation. The gage produces an electrical output proportional to the length of cable above the short circuit imposed by the sea surface.

This rugged gage is capable of operating very well along any exposed ocean coast and is insensitive to biological fouling or to small variations in salinity; however, it is unsatisfactory for use in freshwater, or brackish water. Failure of the gage is frequently caused by lightning damage to gage circuitry. Continuous-wire gages are presently used at all CERC staff-gage locations where electrical conductance of the water is sufficiently high.

c. Pressure-Sensitive Gage. Submerged pressure-sensitive gages are useful at locations with cold winters where ice would form on a staff gage and render it inoperable and at locations where no suitable structure for gage mounting is available or where a staff gage would interfere with navigation. Pressure gages can be placed on the ocean floor in shallow water.

The first pressure gage used by the BEB had a bellows that changed in length in response to water pressure variations (Williams, 1969). The bellows movement was coupled to the core of a linear differential transformer which produced an electrical signal that was amplified and recorded. A new pressure-gage design was adopted in 1964 which used strain gages rather than a bellows (Peacock, 1974).

A pressure-gage record is always damped in comparison to a staff-gage record, because the pressure pulse due to a surface wave is attenuated with increasing depth of measurement. For intermediate and low-frequency waves, the pressure record can usually be compensated for gage submergence with frequency-dependent compensation factors (Esteva and Harris, 1970); for high-frequency waves with wavelengths shorter than twice the water depth, the pressure record is often attenuated beyond recovery.

Local currents can affect apparent wave frequencies. A wave in a current with a component of velocity in the direction of wave travel passes a fixed gage more rapidly than a wave of equivalent length outside the current. Thus, the apparent frequency of the wave in the gage record is inappropriately high for the wavelength. The frequency-dependent compensation factor applied to such a record and the resultant wave height estimate would be too high. Similarly, for a wave in a current with a component of velocity opposing the wave motion, the wave height estimate would be expected to be too low.

Pressure gages are susceptible to biological fouling; however, with routine maintenance, fouling has not been a major problem with gages now used by CERC.

Comparison of Gage Types.

Since the three types of wave gages do not respond identically to a given sea state, each may be associated with a small individual bias. To evaluate the relative responses, a continuous-wire gage, a stepresistance gage, and two pressure gages (2.6 and 4.3 meters below MSL), were mounted 3.7 meters (12 feet) apart on the end of Steel Pier in Atlantic City, New Jersey (Esteva and Harris, 1970). Wave data were recorded as 20-minute digital records on magnetic tape, and 12 records per day for 1 week were analyzed. The standard deviation of each digital record, referred to as the root-mean-square (RMS) elevation, was computed as an estimate of wave height. RMS elevations for pressure gages were compensated according to linear wave theory to conform to surface measurements. RMS elevations from the pressure- and step-resistance gages were plotted as a function of RMS elevation from the continuous-wire gage (Fig. 7). Data from both pressure gages compared favorably with data from the wire gage. However, most data from the step gage were higher than data from the wire gage. Significant height estimates (four times the RMS elevation) obtained from a step-gage record appeared to be about 1 foot higher for low and moderate wave conditions and about 20 percent higher for high-wave conditions (Fig. 7).

One reason why the step-resistance gage is biased toward higher wave readings is that waves striking the gage tend to run up the inside of the H-beam which supports the gage (Fig. 8; see also Fig. 12 in Williams, 1969). During long-term unattended field use, thick biological growth on the gage can slow gage response to wave troughs, and severe growth can continue to short out the gage at a particular elevation even when the sea surface drops momentarily below that elevation.

3. Wave Recorders.

a. Recorder Types. Data from two types of wave recorders have been used for this study. The earlier BEB main recorder type was the pen and ink strip-chart recorder; sample records are shown in Figures 9 and 10. The pen motion is controlled by a voltage signal which increases and decreases in response to momentary changes in sea surface elevation at the gage. The pen and ink recorder was activated by timer-driven switches at regular intervals.

A digital magnetic tape recording scheme has been implemented at CERC within the last 10 years. In this recording scheme, the voltage signal from the gage is converted to a frequency-modulated signal, transmitted to the CERC laboratory via telephone line, reconverted to a voltage signal, converted to a digital signal, and finally recorded in a binary-coded decimal format on 0.5-inch magnetic tape at the rate of four data points per second. The recorder operates continuously, switching automatically to a new gage or group of gages every 20 minutes.


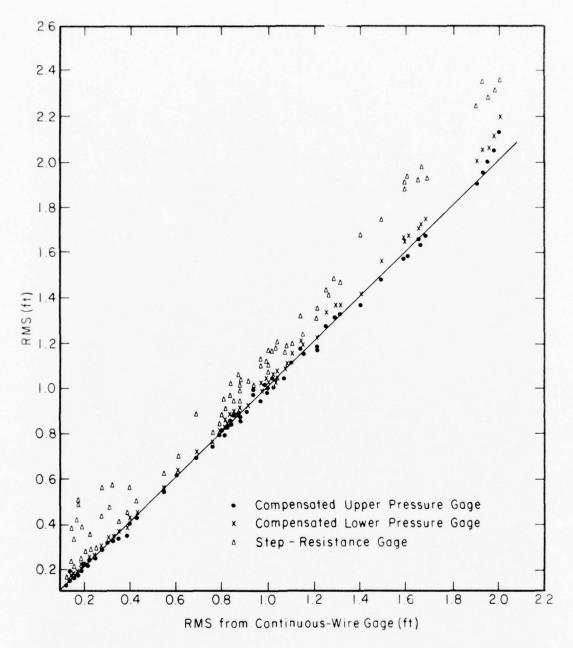



Figure 7. Comparison of root-mean-square (RMS) sea surface elevations from pressure- and step-resistance gage records with those from continuous-wire gage records (Esteva and Harris, 1970).



Figure 8. Oblique photo of step-resistance gage near Chesapeake Beach, Maryland.

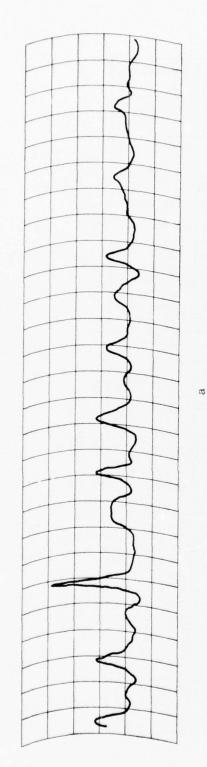


,,

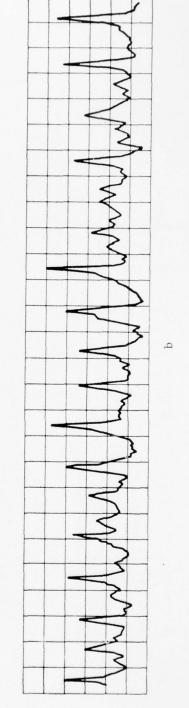

Examples of wave records from: (a) Lake Worth, Florida, at 2215 hours, 27 January 1966; (b) Nags Head, North Carolina, at 1300 hours, 15 April 1975. Figure 9.

F	Significant	Wave
Uata Type	Height (ft)	Period (s)
Pen and Ink	8.0	8.0
Digital	5.9	8.0

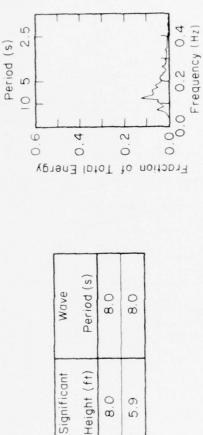

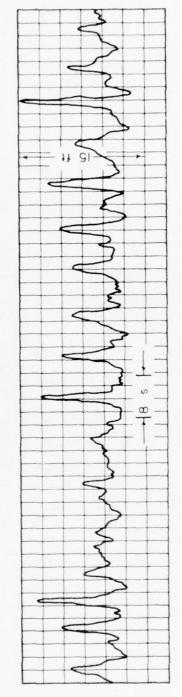


Figure 10. Example of wave record from Wrightsville Beach, North Carolina, at 0100 hours, 27 May 1972.

b. Changes in Recording Procedure. For most of the recorded data, the pen and ink strip-chart recorder ran for 7 minutes each time it was activated (at 4-hour intervals before August 1971 and 6-hour intervals after that date). After April 1975, the standard record length was decreased to 4 minutes. Records taken before January 1970 were on curvilinear paper; records from 1970 to the present are on rectilinear paper (Fig. 9).

Before 1966, all recorders were located at the gage sites and were tended by local people under contract to mail the completed rolls of chart paper to BEB-CERC, to install fresh rolls of chart paper when necessary, and to report any malfunction of the equipment. After 1966, the signals from some gages were sent instantaneously over telephone lines to the CERC laboratory. Since November 1968, the signals from most gages have been routinely sent over telephone lines, converted to digital form, and recorded on magnetic tape.

Digital signals from four gages were recorded simultaneously after March 1971. This procedure is accomplished with an electronic multiplexer which successively samples each of the four gage signals every 1/16 second, so that a data point from any particular gage signal is obtained every 1/4 second.

One 20-minute digital record per hour was obtained for each gage signal before February 1973, accommodating 12 gage signals by the recording sequence. However, since that date more than 12 gage signals have been received and the recording sequence modified to provide one 20-minute record every 2 hours for each gage signal.

Although digital records for each gage recorded are available every 1 or 2 hours, only four digital records per day are routinely analyzed. Pen and ink records taken during time periods covered by digital records are not routinely analyzed, but are used mainly for quality control and for special tests. The pen and ink records also provide a backup when the digital recorder is inoperative. If known in advance that pen and ink records will be analyzed, records longer than 4 minutes can be obtained.

4. Gage and Recorder Problems.

Maintaining an operating wave gage in coastal waters is difficult. To minimize problems, BEB-CERC generally performed routine maintenance twice a year on both step-resistance and pressure gages which consisted of a thorough cleaning and recalibration of the gage and often cleaning and repainting of the H-beam or other supporting structures. Routine maintenance of continuous-wire gages has not been necessary.

In spite of regular maintenance and improvements in wave-gaging systems, interruptions in the recording sequence have been caused by storm waves, lightning, fire, electricity cutoffs, biological organisms, vandals, and errant boats striking the gage.

Some of the common problems which result in missing records with the onsite pen and ink recorders are: (a) Sticking of the recorder pen in one position or running out of ink, (b) failure to promptly replace the chart paper rolls, (c) failure to date the records, and (d) mailed records never reaching CERC.

A major problem with the digital magnetic tape recorder is electronic noise in the data. Noise is fairly common on telephone lines, and although analysis procedures can cope with some types of noise, it is still a problem. Minor, less frequent problems are tape-reading difficulties, power failures, and recorder malfunctions.

IV. ANALYSIS OF PEN AND INK WAVE RECORDS

1. Introduction.

Despite the many problems associated with efforts to measure ocean waves, CERC has accumulated a large volume of pen and ink records. Unless the sea is very calm, these records usually indicate waves with a variety of heights and periods and often show a complex interaction between several distinct wave trains with different heights and periods. Examples of recorded waves are shown in Figure 9.

For practical use, the information in the pen and ink records is usually reduced to a few concise parameters which define a sea state and can be used to form statistical summaries of sea states. These simplified data can be used more readily than the original pen and ink records for the solution of most coastal problems.

Each wave record is usually characterized by a wave height parameter and a wave period parameter. The most commonly used characteristic wave height has been the "significant" height. Significant height was originally proposed by Sverdrup and Munk (1948), who recommended that the wave height estimate be based on the higher waves in the record. They proposed the average height of the one-third highest waves in the record as a reasonable estimate of wave height. The concept of a significant wave height has proved useful in coastal and ocean engineering, and numerous methods have been developed for estimating significant height.

A single measure of wave period has not been as clearly defined. Most pen and ink record analysis methods give no more than a rough averaging of periods of the higher waves; this estimate is usually referred to as the "significant" period.

BEB-CERC has used several different methods to estimate significant wave height and period from pen and ink records; these methods are discussed below.

2. Analysis Methods for Pen and Ink Wave Records.

a. First BEB Method. This first method of pen and ink wave record analysis (started by BEB in 1948) used an average wave period (significant period), measured crest-to-crest, determined from sequences of high,

well-defined waves in the record. The record length was usually 7 minutes, and was divided by the significant period to obtain an estimate of the total number of waves in the record. The heights, measured from crest to preceding trough, of the highest one-third waves were then measured and averaged to give a significant wave height for the record.

- b. Second BEB Method. The second BEB method for pen and ink record analysis, adopted in 1953 or 1954, was quicker than the first method. This procedure required the person performing the analysis to select a 1-minute sample from the record which contained the highest and most uniform waves. Then, a wave-period template was used to estimate a significant period for the high, uniform waves. According to the significant period, the height of the first, second, or third highest wave in the 1-minute sample was measured and used as an estimate of the significant wave height.
- c. CERC Method. In January 1965, a third pen and ink record analysis was adopted at CERC. This method used the full 7-minute wave record, was fairly fast, and was more discriminating than the second BEB method. A wave-period template was used to estimate the period of the higher and more uniform waves in the record. The length of the record divided by the significant period, gave an estimate of the total number of waves in the record. Assuming that the Rayleigh distribution applied for heights of individual waves in a record (see U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1975, pp. 3-5 to 3-11), the rank, n, of the wave which would theoretically have a height equal to the significant height, was determined. The height of the nth highest wave in the record was measured and used as the estimate of significant height. Step-by-step instructions for this analysis method are given in Appendix B.

This third analysis method is now used at CERC when significant wave heights and periods must be estimated from pen and ink records. However, the procedure is no longer carried out routinely.

3. Comparison of Pen and Ink Record Analysis Methods.

Methods used by BEB-CERC for analyzing pen and ink wave records often give different results when applied to the same wave records. These methods, particularly the second BEB method which required selection of a 1-minute sample, are also fairly subjective; the results are dependent upon the individual analyzing the record. The CERC method is more objective, and is considered to give more reliable results.

Since results of all three pen and ink record analysis methods are included in this study, some of the old BEB pen and ink records were reanalyzed using the CERC method. Linear regression equations were computed, relating results from the CERC method to the old analyses; significant height estimates derived were found to average about 20 percent lower than height estimates from the BEB method. Significant period estimates were reasonably comparable to each other. Additional details of this study are in Appendix A.

Harris (1970) compared the CERC method with other accepted methods for estimating significant wave height and period from pen and ink records and found correlations above 0.9 with wave height estimates from a method based on the highest crest and the lowest trough, as recommended by Tucker (1961). Harris also found high correlations between height estimates from the CERC method and the average height of the one-third highest waves in the record.

Methods of estimating wave period from pen and ink records considered by Harris (1970) were the CERC method, the average period between upward zero crossings, the average period between all waves, and the average period of the one-third highest waves. Correlations between estimates from the CERC method and the other methods were below 0.25 except for estimates from the zero-crossing method which gave correlations of 0.39 to 0.55.

V. ANALYSIS OF DIGITAL WAVE RECORDS

Techniques for recording and analyzing digital wave data in the last 15 years have improved considerably, and digital data are now attractive for several reasons. Digital data permit direct computer analysis, providing objective, repeatable estimates of significant height and period, and facilitate computation of wave variance or energy spectra which provide more information about the wave field. Spectra are also useful for solving some engineering problems.

CERC has been recording digital wave data since 1966; data from each gage are recorded at the rate of four points per second for a duration of 20 minutes every 1 or 2 hours. The standard CERC computer analysis uses 4,096 data points or 17 minutes and 4 seconds of data for each gage record processed; one record is processed every 6 hours for each gage. The standard analysis has been applied to most of the available acceptable digital data.

The first step in the CERC computer analysis program is to edit the digital record selected for analysis. Editing routines check for non-numeric characters or anomalous spikes and jumps in the record, and usually interpolate across a few bad or highly questionable data points; however, if the data contain more than five consecutive bad points or if more than 2.5 percent of the data points are bad, the routines reject the record as unsuitable for analysis.

If the record is accepted, the distribution function for the accepted data points and its first five moments are computed. The second and third moments are checked for a reasonable comparison against criteria supplied in the program.

After the credibility of a record has been verified, the program applies a data window to the data points of the form:

$$\frac{y(t)}{2}\left(1-\cos\frac{2\pi t}{T}\right),\,$$

where y(t) is the data point at time, t, and T is the record length. Application of a data window results in greater resolution for the frequency spectrum of the record. This procedure decreases the variance of the data points, and the variance or energy of the original data points, y(t), is retained for estimating significant wave height. The use of data windows is discussed by Bingham, Godfrey, and Tukey (1967), Briscoe (1972), and Harris (1974).

After application of the data window, the program computes the variance spectrum, often called the energy spectrum because the potential energy in the wave record is proportional to the variance of the record. This computation involves assigning a part of the energy to each of 1,024 different frequencies. The spectrum is computed by a method based on the finite Fourier transform technique (Bingham, Godfrey, and Tukey, 1967; Tukey, 1967). To gain statistical stability and to reduce extraneous detail, the energy assigned to several successive frequencies in the computed spectrum is combined to give an array of energy estimates for a series of frequency bands of equal width (usually 0.0107 hertz).

In the standard CERC procedure, spectra are then normalized by dividing the energy assigned to each band by the total spectal energy over a specified range of frequencies. The range of frequencies which the total energy represents is referred to as the *normalization interval*. The normalization interval for surface wave records is usually 0.033 to 1.0 hertz for staff gages, which corresponds to wave periods of 1 to 30 seconds. Normalized spectra facilitate investigation of spectral shapes; examples computed at CERC are shown in Figures 3, 4, and 5.

The spectral analysis of data from submerged pressure-sensitive gages requires some additional calculations. The pressure gage senses a signal which is attenuated by the water over the gage. The amount of attenuation increases with the frequency of the surface waves and the depth of submersion. To compensate the spectrum of a pressure-gage record for attenuation, the variance assigned to each spectral band is multiplied by a factor (greater than or equal to one) derived from linear wave theory. The compensated spectrum is then renormalized.

Compensated pressure spectra are generally based on a more restrictive normalization interval, with a lower high-frequency cutoff than spectra derived from staff gage records. The selection of a high-frequency cutoff for compensated pressure spectra becomes increasingly difficult and critical as water depth over the gage increases.

The standard CERC spectral analysis program is occasionally modified for special applications; e.g., successive data points obtained in laboratory experiments may be separated by a smaller time interval than the standard 0.25-second interval used for field data. A longer time interval between data points and a longer duration of the record are required for harbor resonance studies.

The standard analysis program has also been applied to data not acquired in the standard format. In these cases, the program controls are usually chosen to make the analyses as comparable as possible to the standard analyses. Nonstandard analyses have not been included in this study.

Complete spectra are difficult to interpret for many engineering applications; significant wave height and period provide a convenient and readily used indicator of wave conditions, and for compiling statistical summaries of sea states, are easier to handle than complete, but complex descriptions of wave conditions.

Significant wave height for a digital wave record is approximately equal to four times the standard deviation of the record (U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1975, p. 3-12). For pressure records, this estimate of significant height must be suitably compensated to represent surface wave conditions. The magnitude of the compensated significant height is quite sensitive to the high-frequency cutoff applied to the spectra, especially for data from relatively deep gages or from locations with considerable high-frequency wave energy.

At CERC and other organizations, the dominant wave period for a digital record is defined as the period associated with the frequency at the middle of the spectral band with maximum energy. Since the spectral bands are of equal frequency width, the analysis provides uniform resolution in frequency. However, wave period is the reciprocal of frequency, and the resolution in period is not uniform. If the data are summarized for equal resolution in period, the energy assigned to a greater number of individual frequencies must be combined for short periods than for long periods.

Only a discrete set of period values are possible with the standard digital analysis. When the data are summarized in equal width period intervals, a given period interval may be distorted by one more or less period value than is representative for the interval. This effect is important only for adjacent intervals encompassing few discrete period values or frequency bands; e.g., Table 1 shows that the 13- to 14-second interval contains no period values, and that the 8- to 9-second interval contains two period values while both the 7- to 8- and the 9- to 10-second intervals contain only one. Thus, a false concentration of period values could be expected in the 8- to 9-second interval.

When two wave trains occur, the present system of defining the significant wave period emphasizes the longer period waves. In using uniform period increments, the shorter period would be favored. The present system was adopted because of: (a) Directness, (b) an accurate knowledge of wave frequency is more important than an accurate knowledge of wave period in many practical problems, and (c) longer waves are more important than shorter waves of similar height in many applications. Complete information about all wave trains can be obtained only from the full spectrum.

Table 1. Wave period resolution of the CERC procedure for analyzing digital wave records.

Wave period interval (s)	Number of frequency bands in interval
1 to 2	47
2 to 3	15
3 to 4	8
4 to 5	4
5 to 6	4
6 to 7	2
7 to 8	1
8 to 9	2
9 to 10	1
10 to 11	1
11 to 12	0
12 to 13	1
13 to 14	0
14 to 15	1
15 to 16	0
16 to 17	1
17 to 18	0
18 to 19	0
19 to 20	0
20 to 21	1

Another consideration in interpreting wave period for the band with maximum energy in the spectrum arises from peculiarities of the windwave generation process (Barnett, 1972; Hasselmann, et al., 1973). Nonlinear transfer of wave energy between different frequencies during wave generation causes a net gain of energy in the low-frequency part of the spectrum. The energy transfer process also focuses most of the energy into an increasingly narrow band of frequencies.

Waves traveling away from a generation area tend to segregate according to frequency as low-frequency waves move faster than high-frequency waves. The low-frequency waves also attenuate more slowly than the high-frequency waves.

Thus, wave conditions can arise where a train of low-frequency waves provides the maximum energy in any single spectral band; a train of higher frequency waves contains more total energy but the energy is spread over several frequency bands. In such conditions, the standard analysis would report the period of the low-frequency waves.

VI. COMPARISON OF RESULTS FROM SIMULTANEOUS DIGITAL AND PEN AND INK RECORDS

1. Introduction.

BEB-CERC accumulated a large volume of significant wave heights and periods obtained from pen and ink records. CERC is now in the process

of accumulating and analyzing a considerable number of digital wave records. Both of these data files represent a large investment of money and effort, and provide valuable documentation of waves at many U.S. coastal locations.

In using significant heights and periods from both pen and ink and digital records in this study, the derivation is sometimes ignored; however, this approach can be misleading. Pen and ink record analyses can depend on the method used to obtain them. With data recorded and analyzed by two totally different procedures, discrepancies in the analyses are even more likely.

Engineers are more familiar with pen and ink records because these records have been available longer than digital records. Does the engineer need to make special allowances when using heights and periods derived from digital records? This question is best answered by the following specific questions:

- (1) How do individual significant height and period estimates from pen and ink records compare with those from digital records taken at about the same time?
- (2) How do statistics such as mean and standard deviation of the distribution functions compare?
 - (3) How do the distribution functions compare?

These questions are discussed in this section; conclusions are briefly summarized at the end of the section.

2. Description of Data Sample.

To investigate the compatibility of significant wave heights and periods from digital and pen and ink records, an 8-month sample of both types of data, taken between September 1971 and April 1972, has been analyzed. The digital data (discussed in Section V) were 1,024-second records taken four times daily from gages at six Atlantic coast and two gulf coast locations; 7-minute pen and ink records were also taken four times daily from the same locations, each record beginning within 30 minutes of a digital record. Pen and ink records were then analyzed by the CERC method (Section IV, 2).

3. Comparison of Results.

a. Individual Estimates.

(1) Significant Height. Significant height estimates from digital and pen and ink records taken at an Atlantic coast gage location (Savannah Light Tower, Georgia) are compared in Table 2. The table is a joint distribution of the ratio of pen and ink height estimate to digital height estimate as a function of digital height estimate.

Comparison of significant wave height estimates from digital and pen and ink records, Savannah Light Town Georgia Santambor 1971 to April 19721 Table 2.

1

The state of the s

H(PI) ²				H(Digital) in feet) in feet				Total*	Cumulative	Row
H(Digital) 3	0 to 1	1 to 2	2 to 3	3 to 4	4 to 5	5 to 6	6 to 7	7 to 8		total ⁵	average
0.0 to 0.1				The state of the s		-	Direction of the latest of the				
to											
0.2 to 0.3											
to											
to		17							1	499	1.50
to		3	1	1					S	498	2.10
to		4	7	2	3				17	493	2.79
to		3	S	2	2	1	1		14	476	3.21
to		18	09	19	90	4	3	1	113	462	2.91
0.9 to 1.0		80	36	41	21	7	4		117	349	3.46
		1	54	39	31	12	4	1	142	232	3.61
to		3	18	19	11	4	1		26	06	3.46
to			14	S	7				26	34	3.23
to		3	3	-					7	80	2.21
to			1						1	1	2.50
Total8		44	199	130	83	28	13	2			3,309
Cumulative total ¹⁰		49,9	455	256	126	43	15	2			
Averagell		0.873	0.977	966.0	1.014	1.000	0.958	0.950	0.980		
Percent in											
1.0 ± 0.112		20	45	62	63	89	62	20	5213		

¹Estimates taken within 30 minutes of each other; total of 499 observations.
²H(Pl) = Significant height in feet from pen and ink records by the CERC method (see App. B).
³H(Digital) = Four times the standard deviation of the digital record.
⁴Total number of cases in specified height ratio intervals.

Scumulative total of the total number of cases in specified height ratio intervals.

6Average digital height estimate for all cases in specified height ratio intervals; in directs if certain height ratios tend to associate with high or low wave conditions.

Number of times the height estimate ratio and the digital height estimate falls within the specified intervals.

Total number of cases in specified digital estimate intervals.

Average digital height estimate for all 499 observations.

10Cumulative total of the total number of cases in specified digital estimate intervals.

11Average height ratio for all cases in specified digital height intervals; indicates if certain wave height levels

tend to associate with high or low wave height ratios.

**Percentage of cases in each digital height interval in which height estimates were within 10 percent of each other.

**Percentage of all 499 observations with height ratios between 0.9 and 1.1.

Over half of the pen and ink estimates in Table 2 are within ± 10 percent of the corresponding digital estimates; however, a few height ratios are substantially different from unity. Seven of the pen and ink estimates differ from the digital estimates by more than ± 40 percent. The table shows a decrease in percentage variability of pen and ink estimates for higher wave conditions, indicating that the dispersion between estimates may be absolute rather than wave height dependent.

Table 2 shows no consistent tendency for pen and ink height estimates to fall above or below digital estimates; the average pen and ink height estimate was 98 percent of the average digital height estimate. This difference in averages amounts to only 0.05 foot.

Comparisons of height estimates from seven other gage locations lead to the following similar conclusions: (a) About half of the digital and pen and ink estimates agree within ± 10 percent, (b) 4 out of 100 estimates can differ by ± 40 percent or more, and (c) percentage variability of estimates decreases with increasing wave height.

Correlations between estimates in the full 8-month data sample (Table 3) also indicate that, in general, individual significant height estimates compare favorably (between 0.93 and 0.96 for every location). Correlations between digital and pen and ink height estimates obtained by Harris (1970), using the same methods for two 1-month data samples from Atlantic City, New Jersey, also fall within this range.

For high wave conditions at some locations, the pen and ink height estimates tend to be relatively high; e.g., Wrightsville Beach, North Carolina (Table 4). This tendency derives from the nonlinear wave shapes characteristic of high, long waves in shallow water (see Fig. 10). In the analysis of the pen and ink record in Figure 10, individual wave heights were measured as the difference between crest and preceding trough elevations. The wave height estimate from the corresponding digital record is based on the total potential energy in the record. For a record with sharp crests and flat troughs, the energy in each wave is considerably less than that in a sinusoidal wave of the same height (Fig. 11). The pen and ink height estimate is over 2 feet higher than the digital estimate for the record shown in Figure 10.

Pen and ink height estimates are based on 7-minute records; digital estimates are based on records nearly 2.5 times as long. Since high waves sometimes occur in groups (Rye, 1974), height estimates from the shorter 7-minute records can be unrepresentatively high or low due to poor statistical sampling.

Although height estimates derived from pen and ink records of high, long waves in shallow water tend to be excessive, the reverse would be true for purely sinusoidal waves of uniform height. Ideally, this pen and ink height estimate would be the height of the waves. The digital estimate would be four times the standard deviation or 1.414 times the individual wave height. Thus, the pen and ink estimate would be 30

Table 3. Correlation between significant wave extinates from digital and pen and ink records taken for ng September 1971 to April 1972.

	Heigh	t estimates		od estimates
Location	No.	Correlation between estimates		Correlation between estimates
Chesapeake Bay- Bridge Tunnel, Va.	738	0.96		0.47
Nags Head, N.C.	649	0.96	694	0.73
Wrightsville Beach, N.C.	764	0.96	755	0.68
Holden, N.C.	698	0.93	675	0.73
Savannah Light, Ga.	499	0.94	499	0.61
Daytona Beach, Fla. ²	714	0.96	705	0.71
Naples, Fla.	297	0.94	203	0.75
Destin, Fla.	624	0.96	544	0.79

¹Digital and pen and ink records were taken within 30 minutes of each other.

²Digital estimates were not compensated for hydrodynamic attenuation due to submergence of the gage (7 feet below MSL).

Comparison of significant Wave height estimate from digital and pen and ink records at Wrightsville Beach, North Carolina, September 1971 to April 1972¹. Table 4.

The state of the

ROW	average	0.70			2.50	2.00	1.68	2.00	2.04	2.07	2.54	2.84	3.24	2.89	3.83	2.50	3.50	2.729			
Cumulative total5	***************************************	760			755	753	751	740	724	869	621	463	213	99	15	3	1				
Total4		ın			2	2	11	16	26	77	158	250	147	51	12	2	1			1.012	5413
	9 to 10														1			1	1	1.350	0
	8 to 9													7				1	2	1.250	0
	7 to 8											1	2					3	2	1.117	33
t	6 to 7										H	7			7			23	00	1.117	67
) in fee	5 to 6										1	S	6	1	7			17	25	1.126	35
H(Digital) in feet	4 to 5									1	9	30	22	2	2			99	91	1.095	55
H	3 to 4								2	7	39	44	41	12	2		7	148	239	1.061	56
	2 to 3				2	1	2	∞	11	33	59	127	09	2.1	7	2		327	999	1.017	57
	1 to 2	17					6	∞	12	30	52	41	13	11	4			182	748	0.943	51
	0 to 1	4							1	9		7						12		0.592	00
H(PI) ² H(Digital) ³		0.0 to 0.1	0.1 to 0.2	0.2 to 0.3	to	0.4 to 0.5	to	0.6 to 0.7	to	to	to	to	1.1 to 1.2	to	to	to 1.	1.5 to 1.6	Total ⁸	Cumulative total10	Average11	Percent in 1.0 ± 0.11^2

¹Faken within 30 minutes of each other; total of 760 observations. $^{2}H(PI)$ = Significant height in feet derived from pen and ink records by the CERC method (App. B). $^{3}H(Digital)$ = Four times the standard deviation of the digital record.

"Total number of cases in specified height ratio intervals.

Number of times the height estimate ratio and the digital height estimate falls within the specified intervals. ⁵Cumulative total of the total number of cases in specified height ratio intervals.


⁶Average digital height estimate for all cases in specified height ratio intervals; indicates if certain height ratios tend to associate with high or low wave conditions.

8Total number of cases in specified digital estimate intervals. 9 Average digital height estimate for all 760 observations.

¹⁰Cumulative total of the total number of cases in specified digital estimate intervals.

¹¹Average height ratio for all cases in specified digital height intervals; indicates if certain wave height levels tend to associate with high or low wave height ratios.

12Percentage of cases in each digital height interval in which height estimates were within 10 percent of each other. 13Percentage of all 760 observations with height ratios between 0.9 and 1.1.

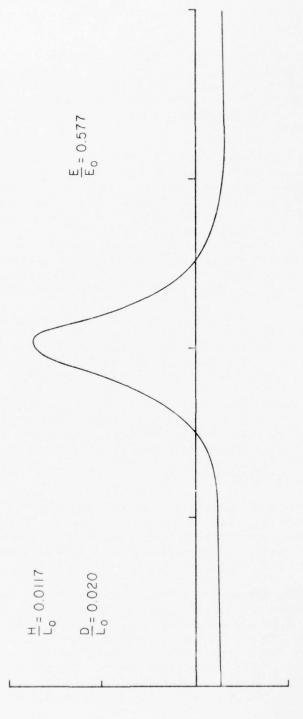

Shallow-water wave profile for $H/L_{\mathcal{O}}=0.0117$ and $D/L_{\mathcal{O}}=0.010$ (H = wave height, $L_{\mathcal{O}}=$ deepwater wavelength, and D = water depth). The energy in this wave is equal to 58 percent of the energy in a sinusoidal wave of the same height (Dean, 1974). Figure 11.

percent less than the digital estimate for a purely sinusoidal wave. In practice, when wave conditions indicate relatively uniform heights and approximately sinusoidal waveforms, the digital height estimate may be higher than the pen and ink estimate (Fig. 12).

When wave conditions are nearly calm, the recorded wave heights fall within a very small height range. The waves have a nearly uniform height and their shape is often more nearly sinusoidal than the shape of high waves in shallow water (Fig. 10). Therefore, for very low wave conditions, the pen and ink height estimate tends to be lower than the digital estimate (see Tables 2 and 4).

Both the digital and the pen and ink record analysis methods have peculiarities in dealing with records of low wave conditions. The digital analysis is designed to reject spectral calculations when the significant height estimate is less than 0.4 foot. The convention for pen and ink record analysis is to report "calm +" if waves are between 0.5 and 1 foot high, and for summarization to assign a significant height estimate of 0.7 foot. If waves are less than 0.5 foot high, the pen and ink analysis reports "calm" which is counted as a significant height estimate of 0. These peculiarities are generally unimportant except for records from a few locations where calms are relatively common.

(2) Wave Period. Wave period estimates from digital and pen and ink records taken at Savannah Light Tower, Georgia, are compared in Table 5. The table gives the joint distribution of digital period estimate versus pen and ink period estimate; the dashline indicates the points at which digital and pen and ink estimates agree.

Most period estimates are within 1 second of each other, which is reasonable agreement considering the approximate method of determining wave period from pen and ink records. In some records, the period estimates differ considerably. The general agreement and the occasional large differences between estimates in Table 5 are typical of the records from seven other gage locations.

Correlations between individual period estimates for the full 8-month data sample are lower than those for heights (Table 3). Except for the gage in Chesapeake Bay, correlations range between 0.61 and 0.79. Comparable correlations were found by Harris (1970) for two 1-month data samples from the Atlantic City gage.

In several records, the period estimates were quite different. A pen and ink record where the period estimates differ by 10 seconds is shown in Figure 13. Each period in the figure appears to be associated with a different wave train. In this situation the trains have comparable wave heights, and a technician looking at the pen and ink record usually reports the period of the shorter waves. The short length of pen and ink records also limits a technician from identifying a long-period pattern in the waves when both short-period energy and long-period energy are present.

Period (s)	10 5 2.5	- 8.7.8 -	ω	1		- V V -	- A	0 0.2 0.4	Frequency (Hz)
		919	E 0 4	01	\$ 0.2	uo	itor	0	

Oct Tubo	Significant	Wave
חמות ואת	Height (ft)	Period (s)
Pen and Ink	3.5	0.9
Digital	3.8	9.7

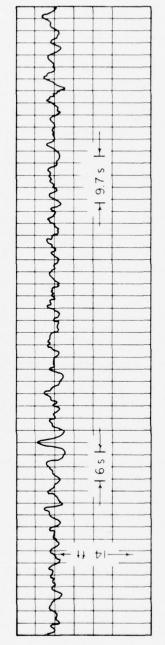


Figure 12. Example of wave record from Savannah Light Tower, Georgia, at 0720 hours, 29 May 1972.

Table 5. Comparison of wave period estimates from digital

,,

I(Digital)~					T(PI)	T(PI) 3 in seconds	spuo					Total4	Cumulative	Ком
in seconds	1 to 2 2 to 3	3 3 to 4	4 to 5	5 to 6	6 to 7	7 to 8	8 to 9	9 to 10	10 to 11	11 to 12	12 to 13		total ⁵	average ⁶
0 to 1														
1 to 2	1 17			7								2	499	4.00
2 to 3	17	5		1			-					9	497	4.50
3 to 4		116-	16	S		2	3	I				43	491	4.78
4 to 2		-	33+	38	7	3	-	2				85	448	5.37
0 10		1	4	30+	49	6	4	2	1			100	363	6.36
				7	35+	16	7	1	3			69	263	7.05
/ to 8					S	111-	6 //	2				27	194	7.80
0		3	9	1	S	20	27+	14				76	167	7.74
to		2	2	1	3	2	7	191	2			26	16	7.85
000	-	7		2	1.7	1	3	4	-10-	4	2	32	65	8.97
3										1			-	
15 70 14				4	4	-	1	2	S	3	3	23	33	9.02
to			-	0									0.	0
to				,		*			4		4		70	0.00
to						1				1	1	3	10	10.50
Total ⁸	3	28	62	92	111	29	63	34	23	00	8			6.839
Cumulative total ¹⁰	499	496	468	406	314	203	136	73	39	16	000			
Average11	4.83	4.96	5.02	5.66	6.47	7,46	7.82	8.47	10.24	12.00	13.00	6.85		

Taken within 30 minutes of each other; total of 499 observations.

7(flightal) = Period corresponding to frequency of highest peak in energy spectrum.

7(flightal) = Period corresponding to frequency of highest peak in energy spectrum.

7(PI) = Significant period desirued from pen and ink records by the CERC method.

7(Intal number of cases in specified digital estimate intervals.

8 Average pen and ink period estimate for all cases in specified digital estimate intervals.

8 Average pen and ink period estimates for all cases in specified digital estimate intervals.

9 Oreal number of cases in specified pen and ink estimate intervals.


10 Cumulative total of the total number of cases in specified pen and ink estimate intervals.

Data Type	Significant Height (ft)	Wave
Pen and Ink	2.5	4.0
Digital	2.8	4

Period (s) 10 5 2.5

0.6

2.8

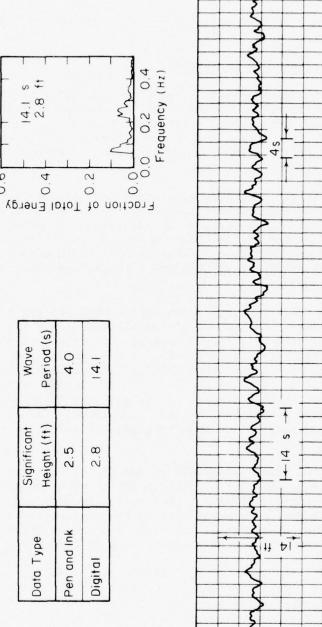

Example of wave record from Savannah Light Tower, Georgia, at 0042 hours, 22 September 1971. Figure 13.

Another pen and ink record (Fig. 14) shows a wave period estimate of 6 seconds and a corresponding digital estimate of 4.5 seconds. Again, the presence of several wave trains appears to be responsible for the discrepancy.

Therefore, much of the scatter in Table 5 can be attributed to the presence of multiple wave trains.

b. Means and Standard Deviations.

(1) Significant Height. Significant height estimates for the full data sample from eight locations are summarized in Table 6. Except for estimates from Chesapeake Bay Bridge-Tunnel, Virginia, and Naples, Florida, mean digital and pen and ink estimates of significant height agree within 10 percent. For four of the seven locations, the mean estimates agree within 4 percent or about 0.1 foot.

Pen and ink height estimates are larger than digital estimates for data from Nags Head and Wrightsville Beach, North Carolina (Table 6). Except for Savannah Light, Georgia, in significantly deeper water, these locations also have the highest mean wave conditions. Thus, the tendency for higher pen and ink estimates is believed due to the nonlinear wave shapes often exhibited by high waves in shallow water as discussed earlier in Section VI, 3,a.

Mean pen and ink height estimates from Chesapeake Bay Bridge-Tunnel and Naples are lower than mean digital estimates (Table 6). The differences are related primarily to the frequent occurrence of relatively calm wave conditions at both locations. For individual pen and ink height estimates which are less than 1 foot, the estimate is usually less than the digital estimate as discussed earlier in Section IV, 3,a. The effect is seen on mean significant height at a location with frequent very low wave conditions. Holden Beach, North Carolina, and Destin, Florida, also have low mean heights, but seldom experience calm conditions.

The engineer is often interested in monthly or seasonal wave conditions at a location. Since the relationship between monthly mean digital and pen and ink height estimates is more variable than mean estimates based on a data sample of several months, the maximum observed difference in monthly mean height estimates for each location is included in Table 6. Most of the maximum differences are less than 20 percent.

Another useful statistic of the distribution function is the standard deviation of significant heights. It is the most important parameter in a simple exponential model of the cumulative distribution function (Thompson and Harris 1972; Harris 1972b; U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1975, p. 4-35).

The standard deviation of digital significant height estimates and the percentage difference between standard deviations of the digital

The second secon

Waye Period (s) 6.0
Significant Height (ft) Per 7.0

) 0.2 0.4 Frequency (Hz)

2.5

10 5

6.7

Period (s)

1,

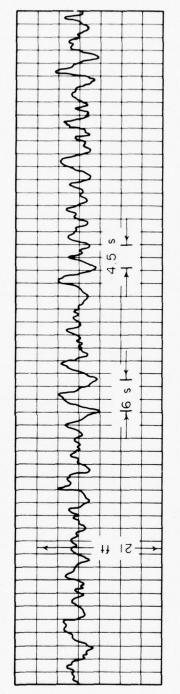


Figure 14. Example of wave record from Savannah Light Tower, Georgia, at 0120 hours, 27 May 1972.

Table 6. Comparison of significant wave height statistics from digital and pen and ink records taken during

THE RESERVE OF THE PARTY OF THE

 $^{1}\mathrm{Digital}$ and pen and ink records were taken within 30 minutes of each other.

 $^2\overline{H}_{DIG}$ is mean significant height estimate from digital records. $^3\overline{H}_{PI}$ is mean significant height estimate from pen and ink records.

"Months with 70 or more observations were considered.

 $^5\sigma_{DIG}$ is standard deviation of significant height estimates from digital records.

 $6_{\sigma_{DI}}$ is standard deviation of significant height estimates from pen and ink records. Thightal estimates were not compensated for hydrodynamic attenuation due to submergence of the gage.

and pen and ink height estimates for each location are included in Table 6. Standard deviations of the pen and ink estimates are between 9 and 33 percent greater in every estimate.

Standard deviations of pen and ink height estimates are high because each estimate is based on only a few of the higher waves in a 7-minute record; each digital estimate is based on a full 1,024-second record. Thus, the pen and ink estimates would be expected to show more scatter, and also the tendency for pen and ink estimates to be relatively high for high waves in shallow water leads to larger standard deviations of the estimates.

(2) <u>Wave Period</u>. Wave period estimates for all eight locations are summarized in Table 7. At each location, the mean pen and ink estimate is lower than the mean digital estimate; however, the differences are small, about one-half a second or less.

Differences between observed monthly mean period estimates are greater, although the pen and ink estimates are never more than 1 second or 15 percent less than the digital estimates. This tendency for pen and ink period estimates to be lower than digital estimates was discussed previously.

The standard deviation of wave period estimates at each location (Table 7) is between 6 and 40 percent smaller for pen and ink estimates than for digital estimates.

c. <u>Distribution Functions</u>. Since many engineering applications of wave data require a distribution function giving the frequency of occurrence of height or period estimates in specified intervals, a comparison of distribution functions from digital and pen and ink estimates is warranted.

Distribution functions of significant height estimates for two locations are plotted in Figure 15. The figure shows that the pen and ink analysis gives more height estimates in the highest intervals of the distribution function, as expected from previous discussion of high waves in shallow water (a characteristic which is particularly noticeable for Wrightsville Beach in Fig. 15,b).

The pen and ink analysis also gives an excessive number of heights in the lowest interval of the distribution function. This characteristic can be attributed to the instructions for the record analysis which state that records with all waves lower than 1 foot be reported as "calm +" or "calm". Since this procedure is simpler than that for records with waves higher than 1 foot, the analyzer tends to facilitate the job by reporting marginal cases as "calm +".

The situation is reversed for wave period estimates. Digital period estimates are more common than pen and ink estimates at both the high and low ends of the distribution function (Fig. 16). Discontinuities

Table 7. Comparison of wave period statistics from digital and pen and ink records taken during September 1971 to August 1972¹,

,,

			2	7 3		5	9 1 5
Location	Months	Observation	TDIG	$\left(\frac{^{1}PI}{\overline{T}_{DIG}} - 1\right) \times 100$	Maximum difference in monthly mean period*	DIG	$\left(\frac{\sigma_{PI}}{\sigma_{DIG}} - 1\right) \times 100^{\circ}$
	(No.)	(No.)	(s)	(pct)	(pct of \tilde{T}_{DIG})	(s)	(pct)
Chesapeake Bay-Bridge Tunnel, Va.	∞	627	3.7	-11.1	-15	1.46	-40
Nags Head, N.C.	∞	694	8.7	- 5.0	-10	2.53	-12
Wrightsville Beach, N.C.	∞	755	7.8	- 5.4	6 -	2.50	-16
Holden Beach, N.C.	∞	675	7.6	- 6.3	80 -	2.52	-22
Savannah Light, va.	2	499	8.9	- 7.2	-14	2.67	-24
Daytona Beach, Fla.7	∞	705	9.4	- 4.0	9 -	2.34	-25
Naples, Fla.	S	203	4.9	-12.7	8	1.99	-15
Destin, Fla.	7	544	5.8	- 2.1	4	1.55	9 -

 $^{10}_{\rm L}{\rm igntal}$ and pen and ink records were taken within 30 minutes of each other. $^{2}T_{DLG}$ is mean wave period estimate from digital records. $^{3}T_{PL}$ is mean wave period estimate from pen and ink records.

"Months with 70 or more observations were considered.

 $^5\sigma_{DIG}$ is standard deviation of wave period estimates from digital records.


 $\mathfrak{f}_{\sigma_{PI}}$ is standard deviation of wave period estimates from pen and ink records. Poigital estimates were not compensated for hydrodynamic attenuation due to submergence of the gage. \mathfrak{g}_{NO} months with 70 or more observations available.

Data Type	Mean Significant Height (ft)	Mean Significant Standard Deviation of Height (ft)	Data Type	Mean Significant Height (ft)	Standard Deviation of Significant Height (ft)
Pen and Ink	3.19	1.29	Pen and Ink	2.75	1.37
Digital	3.24	1.18	Digital	2.65	1.09
4	45 _		45		
4	40		40		
ю	35		35		
anoi:		D	snoit o o		p
servat 25			serval		
40 h	10		1 0p		
5 to 9	- 51		5 toq		
			0		I.
	2		5		
	0 2 4	8 9	2 0 2	4 6	3 10 12 14
	Significant Height (ft)	eight (ft)		Significant Height (ft.	ight (ft)

7

The state of the s

Comparison of distribution functions of significant wave height estimated from digital (solid line) and pen and ink records (dashline) taken during September 1971 to April 1972. (a) Savannah Light Tower, Georgia (499 observations); (b) Wrightsville Beach, North Carolina (764 observations). Figure 15.

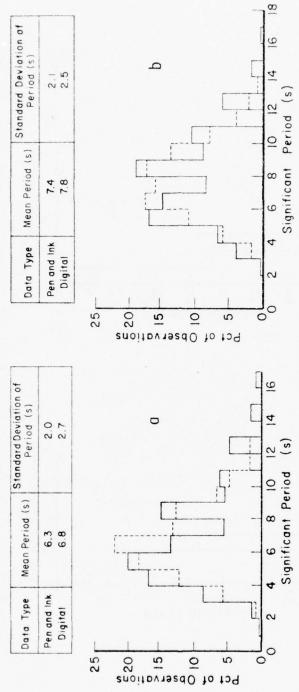

,

Comparison of distribution functions of wave period estimated from digital (solid line) and pen and ink records (dashline) taken during September 1971 to April 1972. (a) Savannah Light Tower, Georgia (499 observations); (b) Wrightsville Beach, North Carolina (755 observations). Figure 16.

in the distribution functions for digital estimates are due to the low resolution of the digital analysis for long wave periods (see Section V).

The tendency of pen and ink period estimates to be shorter than digital estimates was discussed earlier in this section (VI, 3,a). The scarcity of pen and ink estimates at the other end of the distribution function is partially due to the subjectivity of the analysis. Since multiple wave trains are common, a technician analyzing pen and ink records often has several alternative wave periods to report, and when given a choice, usually favors wave periods close to the overall mean.

4. Summary of Comparisons between Simultaneous Digital and Pen and Ink Records.

Comparisons of digital and pen and ink records taken within 30 minutes of each other are summarized below.

- (a) Individual significant wave height estimates agree within ± 10 percent one-half the time, but occasionally differ by ± 40 percent or more.
- (b) Individual wave period estimates generally agree within ± 1 second, but can differ by 10 seconds if several wave trains are present.
- (c) Mean significant height estimates generally agree within 10 percent or less; standard deviations of height estimates based on pen and ink data are about 20 percent greater than those based on digital data.
- (d) Mean wave period estimates from pen and ink data are about 10 percent less than period estimates from digital data; standard deviations are about 20 percent smaller than those based on digital data.
- (e) Pen and ink estimates generally give more heights at the upper and lower extremes than digital estimates.
- (f) Pen and ink estimates generally give fewer periods at the upper and lower extremes than digital estimates.

VII. COMPARISON OF WAVE CLIMATE FROM DIGITAL AND PEN AND INK RECORDS

Although digital and pen and ink wave records taken within 30 minutes of each other during an 8-month period generally give comparable estimates of significant wave height and period, it is also important to compare wave climate determined from a large sample of both types of data. If these data indicate basically the same wave climate at locations where both types are available, both digital and pen and ink estimates can be used with confidence in determining wave climate at other locations.


Thompson and Harris (1972) showed that the cumulative distribution function of significant wave height for a full year of data is generally characteristic of a location for the lower 99 percent of the significant waves. This is supported by the more recent and complete years of data included in Appendix A. Large wave heights can vary from year to year; however, except for extremes, a year of data will provide a good sampling of local meteorological conditions and the waves they generate. Thompson and Harris also indicated that the annual distribution function of significant height is independent of the time of day when the data were collected. Thus, to check the climatological validity of significant height estimates, annual summaries are desirable.


Annual means and standard deviations of significant height estimates are plotted in Figure 17 for most reasonably complete years of data included in Appendix A. Most differences between annual mean significant height estimates for the same data type from different years are as great as differences between annual means for different data types. Except for Huntington Beach, California, estimates of annual mean significant height are within about 30 percent or 1 foot of each other, and differences at most locations can be attributed to annual variability in wave conditions. The pen and ink estimates for Huntington Beach differ substantially from the digital estimates due to the old design of the gage at Huntington Beach before July 1969 and to the difficulty of maintaining a gage located so far from BEB-CERC.

Most annual standard deviations of significant height estimates from digital and pen and ink data compare favorably (Fig. 17).

Annual means and standard deviations of significant period estimates are plotted in Figure 18. Annual mean pen and ink period estimates are slightly lower than the digital estimates, although both estimates are generally within 15 percent or 1 second of each other. Standard deviations of period estimates are also comparable, generally differing by less than 30 percent.

Annual distribution functions of significant height estimates can conveniently be compared when plotted in a semilog format (Thompson and Harris, 1972; Harris, 1972b). BEB-CERC data for seven different locations are sufficient to permit such comparisons between digital and pen and ink estimates. The comparisons are best illustrated in Appendix A which summarizes data from Atlantic City, New Jersey, Virginia Beach, Virginia, Nags Head, North Carolina, Naples, Florida, and Huntington Beach, California. Data in the appendix for each of these locations show that, for the more recent and complete years of data, the annual variability in the distribution function of significant height estimates from one data type is as great as the variations between distribution functions from different data types. For Huntington Beach, the distribution functions from digital data are higher than distribution functions from pen and ink data for reasons noted earlier in this section.

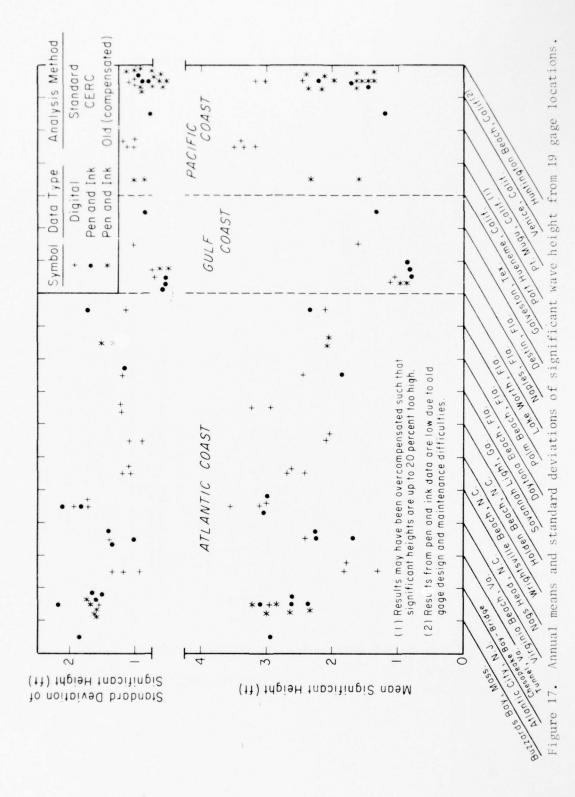

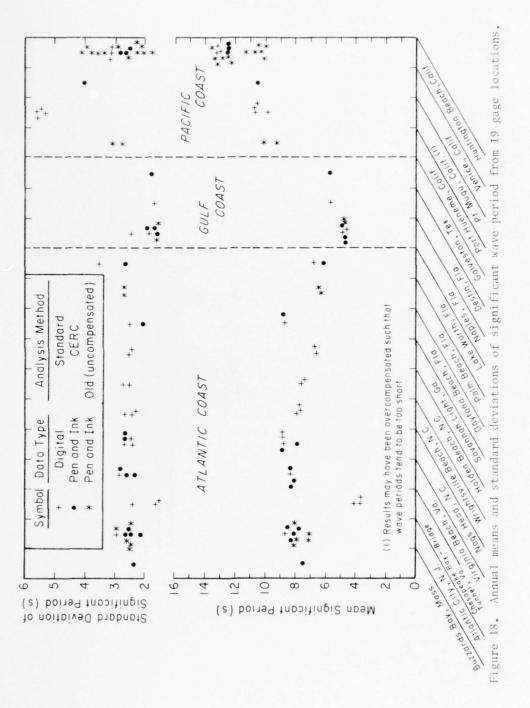

Annual probability density functions of wave period estimates indicate reasonable consistency between digital and pen and ink estimates. The comparison is shown by simple bar graphs in Appendix A for the above five gage locations and for Daytona Beach and Lake Worth, Florida. The peak density for all seven locations occurs in the same or an adjacent period interval for both digital and pen and ink estimates.

LITERATURE CITED

- BARNETT, T.P., "Observations of Wind Wave Generation and Dissipation in the North Sea: Implications for the Offshore Industry," *Proceedings* of the Offshore Technology Conference, Dallas, Tex., May 1972, pp. 43-50.
- BINGHAM, C., GODFREY, M.D., AND TUKEY, J.W., "Modern Techniques of Power Spectrum Estimation," The Institute of Electrical and Electronics Engineers Transactions on Audio and Electroacoustics, AU-15, 1967, pp. 56-66.
- BRISCOE, M.G., "Energy Loss in Surface Wave Spectra Due to Data Windowing," Deep-Sea Research, Vol. 19, 1972, pp. 665-667.
- DEAN, R.G., "Evaluation and Development of Water Wave Theories for Engineering Application," SR-1, Vol. I, Stock No. 008-022-00083, Vol. II, Stock No. 008-022-00084, U.S. Government Printing Office, Washington, D.C., Nov. 1974.
- ESTEVA, D., and HARRIS, D.L., "Comparison of Pressure and Staff Wave Gage Records," *Proceedings of the 12th Coastal Engineering Conference*, Washington, D.C., 1970, pp. 101-116.
- GALVIN, C.J., Jr., "Wave Breaking in Shallow Water," Waves on Beaches and Resulting Sediment Transport, Academic Press, New York, Mar. 1972, pp. 413-456.
- HARRIS, D.L., "The Analysis of Wave Records," Proceedings of the 12th Coastal Engineering Conference, Washington, D.C., 1970, pp. 85-100.
- HARRIS, D.L., "Characteristics of Wave Records in the Coastal Zone," Waves on Beaches and Resulting Sediment Transport, Academic Press, New York, 1972a, pp. 35-40.
- HARRIS, D.L., "Wave Estimates for Coastal Regions," *Shelf Sediment Transport*, Dowden, Hutchinson, and Ross, Stroudsburg, Pa., 1972b, pp. 99-125.
- HARRIS, D.L., "Finite Spectrum Analyses of Wave Records," Proceedings, International Symposium on Ocean Wave Measurement and Analysis, New Orleans, La., 1974, pp. 107-124.
- HASSELMANN, K., et al., "Measurement of Wind-Wave Growth and Swell Decay During the Joint North Sea Wave Project (JONSWAP)," Deutshes Hydrographisches Institut, Hamburg, 1973.
- McCLENAN, C.M., and HARRIS, D.L. "The Use of Aerial Photography in the Study of Wave Characteristics in the Coastal Zone," TM-48, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Jan. 1975.

- PEACOCK, H.G., "Remote Wave Gaging Program," Proceedings, International Symposium on Ocean Wave Measurement and Analysis, New Orleans, La., 1974, pp. 170-185.
- RYE, H., "Wave Group Formation Among Storm Waves," Proceedings of the 14th Coastal Engineering Conference, Copenhagen, Denmark, 1974, pp. 164-183.
- SEYMOUR, R.J., et al., "Coastal Engineering Data Network," First Semi-Annual Report, Institute of Marine Resources, University of California, La Jolla, Calif., 1976.
- SVERDRUP, H.U., and MUNK, W.H., "Empirical and Theoretical Relations Between Wind, Sea, and Swell," *Transactions*, *American Geophysical Union*, Vol. 27, No. 6, 1946, pp. 823-827.
- THOMPSON, E.F., and HARRIS, D.L., "A Wave Climatology for U.S. Coastal Waters," *Proceedings of Offshore Technology Conference*, Dallas, Tex., May 1972, pp. 675-688.
- THOMPSON, E., "Results from the CERC Wave Measurement Program," Proceedings of the International Symposium on Ocean Wave Measurement and Analysis, New Orleans, La., Sept. 1974, pp. 836-855.
- TUCKER, M.J., "Simple Measurement of Wave Records," The Dock and Harbor Authority, Vol. XLII, No. 493, Nov. 1961, p. 231.
- TUKEY, J.W., "An Introduction to the Calculations of Numerical Spectrum Analysis," Advanced Seminar on Spectral Analysis of Time Series, Wiley and Sons, New York, 1967, pp. 25-46.
- U.S. ARMY, CORPS OF ENGINEERS, COASTAL ENGINEERING RESEARCH CENTER, Shore Protection Manual, 2d ed., Vols. I, II, and III, Stock No. 008-022-00077, U.S. Government Printing Office, Washington, D.C., 1975, 1,160 pp.
- WILLIAMS, L.C., "CERC Wave Gages," TM-30, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Washington, D.C., Dec. 1969.
- WILSON, J.R., and BAIRD, W., "A Discussion of Some Measured Wave Data," Proceedings of the 13th Coastal Engineering Conference, Vol. 1, 1972.

The second secon

APPENDIX A

EXPLANATION OF SUMMARIES OF SIGNIFICANT HEIGHT AND PERIOD

1. General Format of Summaries.

Significant heights and periods are summarized in Appendixes A-1 (U.S. Atlantic coast gages), A-2 (gulf coast gages), and A-3 (Pacific coast gages). Each appendix includes a map showing gage locations. The data summaries are ordered according to gage location, from north to south for the oceanic coasts and from east to west for the gulf coast.

The following data are included in the summaries for each location:

- (a) Gage history;
- (b) number of records analyzed for each month and year;
- (c) plot of monthly maxima, means, and standard deviations of significant height;
- (d) plot of monthly means and standard deviations of significant period;
- (e) plot of annual significant height distribution functions;
- (f) plot of annual significant period distribution functions;
- (g) plot of seasonal significant height distribution functions; and
- (h) seasonal and total joint distribution functions of significant height versus period.

2. Explanation of Summary Formats.

- a. <u>Gage Histories</u>. A tabular history of the wave gage or gages which acquired the data is included in the summaries. The history includes pertinent physical information about the gage, the gage supporting structure, and dates for wave records obtained with no continuous interruptions longer than 1 month. Some of the interruptions are documented and explained, but many short interruptions in the recording sequence are not mentioned.
- b. Number of Analyzed Records. The number of analyzed wave records available for each month and year is presented in each appendix. Since pen and ink records taken before 1971 were made at 4-hour intervals, the maximum number of pen and ink record analyses in a 30-day month was 180; the maximum number of analyses in a 365-day year was 2,190. Recent

digital records have been analyzed at 6-hour intervals; therefore, the maximum number of digital analyses in a 30-day month is 120, and in a 365-day year is 1,460.

c. Monthly Maxima, Means, and Standard Deviations of Significant Height. Plots of monthly significant height statistics are included as figures in each appendix. Monthly means, identified by year and data type, are plotted for the recent and reliable data from each location. The range of monthly standard deviations obtained for each month of the year is also shown. Means and standard deviations are included only for months with 100 or more analyzed pen and ink records or 60 or more digital records.

The maximum significant height obtained for each month of the year is also shown in the plots. In several cases two maxima are plotted for each month, one maximum for digital analyses and one maximum for pen and ink record analyses.

Annual means and standard deviations of significant height are plotted at the right-hand edge of the figures for the more reliable and complete years of data. A complete plot of annual height statistics is given in Figure 17 of the text.

The data for Palm Beach and Port Hueneme were obtained by an old method of pen and ink record analysis and have been compensated to compare with data obtained by recent analysis methods (the compensation procedure is discussed later in this section).

- d. Monthly Means and Standard Deviations of Significant Period. Each appendix contains figures of monthly significant period statistics. Monthly mean significant periods and the range of monthly standard deviations are plotted for the same months and in the same format as the significant height statistics. Annual significant period statistics are also included for the more reliable and complete years of data. A complete plot of annual period statistics is given in Figure 18 of the text.
- e. Annual Significant Height Distribution Functions. Semilog plots of annual cumulative distribution functions of significant wave height are included as figures in the appendixes. At locations where more than 4 years of data are available, the distribution functions are plotted in clusters of from one to four curves, with the origin for each successive cluster spaced 5 scale meters above the previous origin. A distribution function corresponding to a relatively complete year of data is represented by a dashline common to all clusters. Distribution functions derived from both digital and pen and ink data are included in the plots.

In most years with less than 1,600 analyzed pen and ink records at 6 per day or less than 700 analyzed digital records at 4 per day, annual significant height distribution functions have been omitted. These cutoffs, discounting years of pen and ink results less than 73 percent

complete and years of digital results less than 48 percent complete, were chosen arbitrarily after examination of the data. A lenient cut-off for digital analyses seems justified since a digital estimate of significant height is more reliable than a pen and ink estimate, and gaps in the digital analyses are often unrelated to wave conditions.

The number of analyzed records in each year is listed within the boundaries of the plot. The plot for Pt. Conception, California, has been omitted because insufficient analyses were available to provide a meaningful annual distribution function of significant wave heights.

Some of the data for Atlantic City, Palm Beach, Naples, Port Hueneme, and Huntington Beach were obtained by an old method of pen and ink record analysis, and compensated to compare with data obtained by recent analysis methods (the compensation procedure is discussed later in this section).

f. Annual Significant Period Distribution Functions. Bar graphs of annual distribution functions of significant wave period obtained by the most reliable analysis method, preferably digital analysis, are presented in each appendix. Many of the graphs indicate the range of percentages in each interval obtained by an older, less reliable analysis method.

The median period for Atlantic coast gages is generally 8 to 9 seconds, although the number of wave periods occurring in the 8- to 9-second interval is exaggerated by the digital analysis (see Section V). For gulf coast gages, the median period ranges between 2 and 6 seconds; for Pacific coast gages, the median period is generally 14 to 15 seconds.

The figure for Pt. Conception has been omitted because of insufficient data.

- g. Seasonal Significant Height Distribution Functions. Figures showing seasonal cumulative distribution functions of significant height for several individual months combined are included in each appendix. The distribution functions represent only data from months with 100 or more analyzed pen and ink records or 60 or more digital records, except in several months where insufficient data were available. The distribution functions also represent analyses from one homogeneous data source: Digital data, pen and ink data analyzed by the CERC method, or, for Palm Beach and Port Hueneme, pen and ink data analyzed by old BEB methods and suitably compensated by regression equations (the compensation procedure is discussed later in this section).
- h. Joint Distribution Functions of Significant Height versus Period. Tables in most of the appendixes contain 13 tabular joint distribution functions of significant height and period. Results are summarized by months with 60 or more digital records or 100 or more pen and ink records. Each table summarizes monthly results from 1 to 4 years derived from a homogeneous data source: Digital data, pen and ink data analyzed by the CERC method, or, for Palm Beach and Port Hueneme, pen and ink data

analyzed by old BEB methods, with heights suitably compensated by regression equations (discussed later). The monthly tables of joint distribution functions are followed by a single table summarizing all monthly data.

For locations with sizable quantities of both digital and pen and ink data, results are summarized from the more abundant source as discussed above. Results from the less abundant source are summarized in an additional table for use in evaluating extreme conditions.

Each table indicates the months and years and the total number of observations represented. The main body of the table gives the number of observations for which the significant height and period were within the specified intervals. All numbers in the interior of the table have been normalized to give the number of observations per 1,000 observations. These numbers can be converted to percent by dividing by 10.

Marginal totals are also included. The row labeled "Total" gives the total number of observations out of 1,000 which fell within each specified significant height interval. The column total gives the number of observations out of 1,000 which fell within each specified period interval. Observations in the lowest period interval usually represent calm conditions, but were not considered in normalizing the column totals. The cumulative totals in the tables are totals of the entries in the "Total" row and column.

Each entry in the "Row Average" column gives the average significant height for all observations within a specified period interval. Entries under "Column Average" are the average significant period for all observations within a specified height interval. The row and column averages are useful for investigating the relationship between significant height and period. For most ocean coastal locations the largest significant heights are usually associated with intermediate periods. However, the tables show no consistent simple relationship between significant height and period. A tendency for significant period to increase with increasing significant height is apparent for gulf coast and Chesapeake Bay locations.

At the bottom of each table is a list of the average, variance, and standard deviation of both significant heights and significant periods. The type of data and gage used to obtain the data summarized in the table along with other remarks are footnoted.

i. Compensation for Different Pen and Ink Analysis Methods. Results obtained by the older, less reliable methods of pen and ink record analysis discussed in Section IV are included for several locations. These results are grouped into relatively homogeneous blocks according to the method of analysis and the person performing the analysis.

For Atlantic City, Palm Beach, and Huntington Beach, a 1- to 2-month sample of pen and ink records from each block was reanalyzed with the

CERC method. For each sample, a linear regression equation was computed for significant height estimates obtained by the two methods and for significant period estimates. Where necessary, the appropriate regression equation was applied to significant wave height statistics obtained by the old methods of analysis. Regression equations from the above locations were applied to data from Virginia Beach, Naples, and Port Hueneme to compensate old significant wave height statistics.

Significant wave period statistics obtained by the old methods of pen and ink record analysis are included for Palm Beach and Port Hueneme, but have not been compensated.

Details of the compensation for each location are included in a table.

- j. Time History of Significant Height and Period. Figures for an east coast location (Atlantic City) and a west coast location (Huntington Beach), are included in the appendixes to give perspective on the time history of significant height and period during 4 months of high wave activity.
- k. Monthly Significant Height Distribution Functions. Each curve in the plots of seasonal significant height distribution functions represents an average of from 1 to 4 months. A number of plotted monthly significant height distribution functions are included in the appendixes for Atlantic City and Huntington Beach. The monthly distribution functions are plotted in the standard format and show trends toward high or low wave conditions in some months, but also show considerable variability for different years. The plots do not include the number of analyzed records for each month; however, the number can be determined from the tables listing the number of analyzed records for each month and year.

APPENDIX A-1

SIGNIFICANT WAVE HEIGHT AND PERIOD SUMMARIES, U.S. ATLANTIC COAST

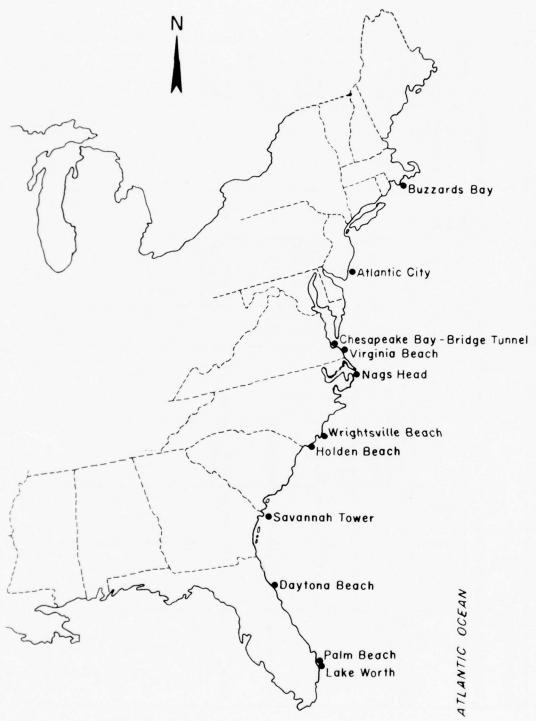


Figure A-1. Location of BEB-CERC wave gages along the U.S. Atlantic coast.


Table A-1. CERC wave gage history for Coast Guard Light Tower, Buzzards Bay, Massachusetts.

CERC Form 174-74 18 Mar 74	74							
COORDINATES: 41°24' N., 71°02' W.	24' N., 71°02'	W.	LOCATION:	Coast Gu	ard Light Towe	r, Buzzards	Coast Guard Light Tower, Buzzards Bay, Massachusetts	
Type of Gage	Beginning of Proper Operation	End of Proper Operation	Explanation	Gage Length (feet)	Gage Range (ft MSL)	Water Depth (ft MSL)	Distance from seaward end of pier	Pier Length (feet)
Step-resistance (SR), staff-relay type	4	27 Nov. 1962	19 Nov. 1962 27 Nov. 1962 Gage secured for winter; inoperable due to icing and other problems.	45		63		Tower is about 6 nmi from shore.
	17 June 1963	23 Nov. 1963	17 June 1963 23 Nov. 1963 Gage returned to CERC for general repair.					
Pressu re	23 Jan. 1964	18 Apr. 1965	23 Jan. 1964 18 Apr. 1965 Gage removed.		-6.5 to +38.5 (mounted 6.5 ft below MSL)	63		Tower is about 6 nmi from shore.
SR staff-relay type	12 May 1965	13 Aug. 1965	12 May 1965 13 Aug. 1965 Gage removed.	45	-17 to +28	63		Tower is about 6 nmi from shore.
Pressure	12 Oct. 1965		3 Feb. 1966 Gage destroyed by storm; not replaced.		-8 to +37 (mounted 8 ft below MSL)	63		Tower is about 6 nmi from shore.
No.								


Table A-2. Number of analyzed pen and ink records from Buzzards Bay, ${\tt Massachusetts.}^{1}$

YR YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	вст	NOV	DEC	тот
1963						84	101	85	124	161	118		673
1964	50	167	123	162	176	122	158	150	145	166	66	181	1666
1965	183	144	182	104	39	78	86	30		84	147	179	1256

 $^{^{1}\}mathrm{From}$ 7-minute records taken six times daily; analyzed by the second BEB method for 1963 and by the CERC method for 1964-65.

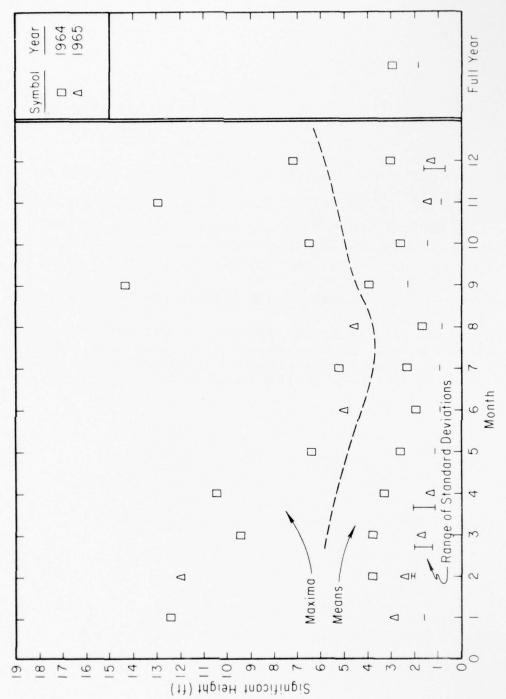

Maxima, means, and standard deviations of significant height from Buzzards Bay, Massachusetts; determined from 7-minute pen and ink records taken six times daily. Figure A-2.

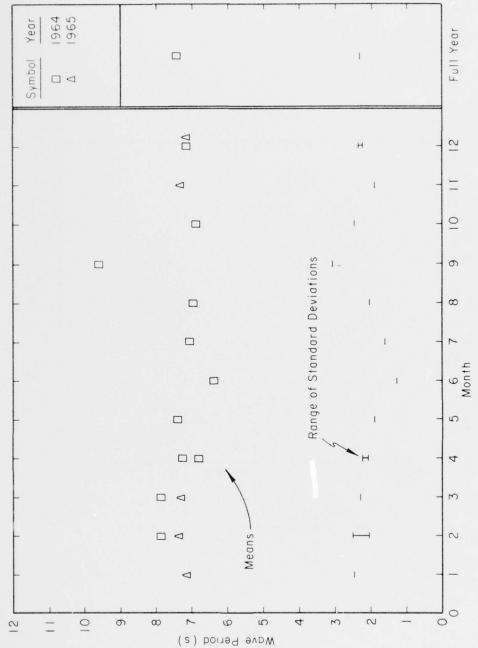

7,

Figure A-3. Means and standard deviations of wave period from Buzzards Bay, Massachusetts; determined from 7-minute pen and ink records taken six times daily.

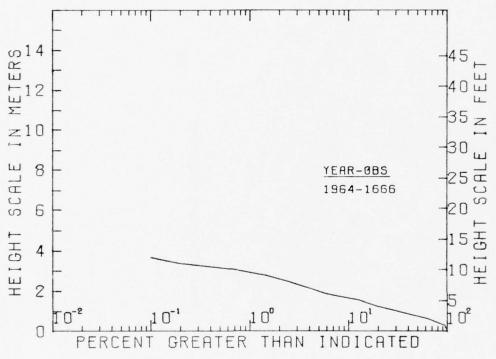
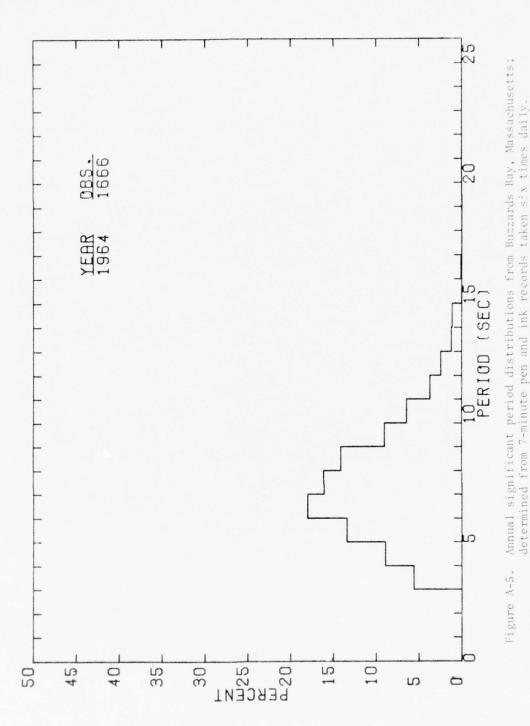


Figure A-4. Annual cumulative significant height distribution from Buzzards Bay, Massachusetts; determined from 7-minute pen and ink records taken six times daily.



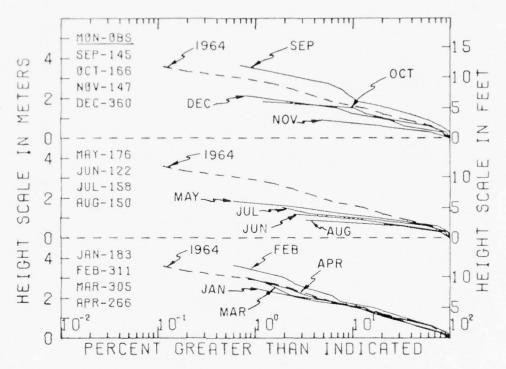


Figure A-6. Seasonal summaries of cumulative significant height distributions from Buzzards Bay, Massachusetts; determined from 7-minute pen and ink records taken six times daily.

Table A-3. Wave climate for Buzzards Bay, Massachusetts.
Distribution of significant height versus period (in observations per 1,000 observations).

183 088	ERVATION	S	5	UMMARY	FOR	JAN 65						
PER100 (8869)				HE10	HT (F	7)						
0 - 1 0	0 • 1	1-2	2.3	3-4	405	5=0	6.7	7 - 6	8=9	101.	CUM. 101.	AVG. *
2.0 - 2.4											1000	
3.0 • 3.4 3.5 • 3.9 4.0 • 4.9		11 27 71	22	5	11	22			5	11 56	1000	2.10
5.0 - 5.9	5	22	93 38	60	*,	5 16 22	5		,	197	792	3.10
7.0 = 7.9 8.0 = 8.9 9.0 = 9.9	11	22	22	16 27	16	11	55		5	107	376	4.03 3.45 2.35
10.0 -10.9		5	38	5 5						96	152	2.03
12.0 m12.9 13.0 m13.9 14.0 m14.9	11			5						11	11	.00
TOTAL CUM, TOTAL COL. AVG.	1000	279	656	191	38 169	131	33	11	11			2.82
AVERAGE SIG.		2.8	7,28	6,96	7.36	6,81	6.67	.00 PERIOD	6.50 • 7.2	7.21 SEC.		
STANDARD DEV	SIG. HEIG IATIUN OF	HFIG		1.58 F	1	ARIANC	E OF W	AVE PE	HIOD . OF PERIC	5.86	8EC 50	

RESULTS OBTAINED FHOM THMINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE MAYE GAGE LOCATED AT COAST GUARD LIGHT CALMS ARE OMITTED.

400000																
(SECS)				HEIG	HT CFT	,										
	4-1	1-2	2-3	3.4	4+5		4=7	7=8							CUM.	#Q#
.0 - 1.9	19	1	2.,	306	***	3=0	••/	7.0	804	4.10	10.11	11-15 1	4.13	101.0		
.0 - 2.4															1000	
.5 . 2.9															1000	
.0 . 3.4														3	1000	
.5 . 3,9			10											20		2.5
.0		29	53	1.0		16	3							105		3.0
.0 . 5. *)	35		19	10	10	•							144		2.6
.0	-	45	45	32	19	10			3	3				107		3.2
.0 . 7.4		20	42	29	13	19		3						141		3.1
.0	39	29	57	13		16								121		2.0
.0 . 9.9	23	23	26	13	13		3		3					111		2.7
.0 -10.	3	23	13	3	13	10	3		3		10					4,4
.0 -11.9			10	1.	15	3	3	3		3				50		
.0 -12.4			3	3	3	3		3	3		,			30		7.5
.0 -13,9	3	3			3									10	10	2.1
TAL	100	552	257	146	103	8.7	1)	5.2	13		13		•			1.1
M. TOTAL	1000	894	664	412	204	161	74	61	39	50	19	•				
L. AVG.	8,344	7.32	7.07	7.50	0,35	7.54	.00	4.30	9.75	.00	11.00	.00	2.50	7.09		
ERAGE SIG.			1						. 7.							

305 0886	RVATION		3	UMMARY	FOR H	AR 64	MAR 65	i					
PERIOD (SECS)				HEIG	HT (F1)							
	0-1	1-2	2-3	3-4	4-5	5=6	6-7	7-6	8=9	9-10	101.	CUH. 101.•	HOM AVG.
.0 - 1.9	72				2000							1000	.00
2.0 - 2.4												1000	
2.5 . 2.9												1000	.00
3.0 . 3.4.		1.5		3							16		
3,5 - 5,9	10	5.0	10	3							46		1.05
4.0 • 4.9	1	66		10			3				9.5		
5.0 - 5.9	3	49	46	10	3	7	3				131		2.45
6.0 - 6.9	7	3.0	53	50	1.5	7					150		2.74
7.0 . 7.9	20	26	30	23	1.5	13	10				145		2.96
8.0 . 8.9	3.3	43	49	7	7		10	,		3	170		2.50
9.0 . 9.9	16	26	10	53		13	7			3	113		3.00
10.0 -10.9	10	36	1 0	10	13		3	7		3	106		3.00
11.0 -11.9	7	13	3	3	7	7				,	42		3.50
15.0 -15.9		1		2	,						14		2.75
13.0 -13.9		,										4	
14.0 -14.9		341	193		59	49	39	. 0		13	4	4	1,50
TOTAL	180	820	479	285	170	111	62	10	13	13			2.48
COL. AVG.	7.86*	7,05	7.40	7.64	8.67	8,23	7.83	9.83		10.00	7.57		
	/.00-	1.05	1,40	,	0.0/	0,23	, , 0 3		.00	10.00	1.31		
AVERAGE SIG.	HETGHT I	. 24	H . T			VERAGE	WAVE	PERIOD	. 7	57 SEC			
VARIANCE OF				FT 86				AVE PER			21 BEC	80.	
STANDARD DEV	ATTON OF	HETO		1.84 F				ATION I					

RESULTS OBTAINED FHOM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE MAYE GAGE LUCATED AT COAST GUARD LIGHT CALMS ARE OMITTED,

	2	66 08SE	RVATIONS	•		BUMMARY	FOR	APR 64 A	PH 6	5						
		100				HEIG	HT (F	T)								
(:	S E C	(5)														
															CUM.	HOM
			0 - 1	1 = 2	5-7	3 - 4	4-5	5.0	6-7	7 - 6	8=9	9-10	10-11	TOT.		AVG
		1.9	109												1000	
		2.4													1000	
		2.9													1000	
		5.4	4	4	4	8								17		2.00
		4.9	8 50	23 38	8		11	8	4	4				63		2.37
		5.9	19	38	26	15			4					131		2.44
		6.9	15	41	19	15	4	8	u					118		2.11
		7.9	19	56	41	15	15	8	4	4	4			118		2.39
		8.9	19	41	23	15	15	6	4		-			139		2.68
		9.9	19	49	4	11	11		4		8		8			3,58
0.0			- 4	8	н	ii	23	4	8		4			76		4.06
11.0				В		• • •	- 4							13		2,50
OTAL			244	305	139	113	94	45	50	11	15		8	.,	13	2.45
UM.	10	DTAL	1000	756	451	312	199	105	60	34	23	8	8			
04.	4	/G.		7.05	6.89	6.84	7.97		15.8	7.17	9.25	.00		7.14		
VER		SIG.	HEIGHT I	2.4	5 FT			AVERAGE	WAVE	PERIOD	. 7.	14 SE	•			
			IG. HEI			FT 90								80.		
			ATTUN OF			1.97 F		STANDARL								

PERIOD				HETO	HT (F	T 1				
(8ECS)										
(00.00)										
									LUM.	HOM
	0-1	1-2	2 . 3	3-4	4=5	5-6	6 . 7	TOT		AVG
.0 . 1.9									1000	
.0 . 2.4									1000	.00
.5 . 2.9									1000	
.0 . 3,4									1000	.00
.5 - 3.9		6						6	1000	1.50
.0 - 4.9		11		40				51	994	3.06
.0 - 9.9		34	66	40	11			148		2.69
.0 - 6.9		40	105	40	5.2	17		555	795	2.94
.0 - 7.9	28	68	114	5.3	17	6	6	261	574	2.59
.0 - 8.9	1 1	34	105	6				155	312	2.17
.0 . 9.9	6		95	6				80	159	2.50
.0 -10.9		6	6	1 1				53		2.75
.0 -11.9			17	6				23	57	2.75
.0 -12.9		6	6	6				17	34	2.50
.0 -13.9		6		11				17		2.83
TAL	45	216	472	187	51	53	6			2.57
M. TUTAL	1000	955	759	267	80	58	6			
L. AVG.	8.00*	7.32	7.74	7.14	6.61	6.75	7.50	7,47		
ERAGE SIG.	HEIGHT	. 2.5	7 + 1			VERAGE	HAVE	PERIOD	. 7.	17 SEC.
HIANCE OF S	IG. HEI	GHT .	1.08	FT 80						3,43 SEC 50
ANDARD DEVI	ATTON O		HT .							100 . 1.85 58

REBULTS OBTAINED FROM 7-MINUTE PEN AND INK RECURDS TAKEN HITH A PRESSURE HAVE GAGE LUCATED AT COAST GUARD LIGHT.

125 OR8EB	VATION	8	8	UMMAHY	FOR J	JN 64		
PERIOD				HEIG	HT (FT)		
(St.CS)								
							CUM.	R0*
	0-1	1 - 2	2.3	3-4	4-5	TOT	101.*	AVG. •
.0 - 1.9							1000	.00
2.0 - 2.4							1000	.00
2.5 . 2.9							1000	.00
3.0 - 3.4	8					8	1000	.50
3.5 - 3.9	16	16				33	992	1.00
4.0 - 4.9		25	33	8		74	959	2.50
5.0 4 5.9	8	115	41	25	8	197	885	2.04
6.0 . 6.9	25	213	123	49	8	418		2.03
7.0 - 7.9	41	123	25			197		1.50
8.0 - 8.9	16	33		8		57		1.50
9.0 - 9.9	•							.00
0.0 -10.9		16				16		1.50
OTAL	115	541	155	98	25			1.88
UM. TUTAL	1000	885	344	123	25			.,,,,
OL. AVG.	6.45	6.58	6.13	6,33	5,50	6.42		
,,			.,,,	.,	.,			
VERAGE SIG. H	FIGHT					FRAGE	WAVE P	ERIOD . 6.42 SEC.
AHIANCE OF SI	G HE I	GHT	- A1	FT 80				VE PERIOD . 1.51 SEC 800
TANDARD DEVIA				.90 F				TION OF PERIOD . 1.23 BEC

CUM. HON 101. AVG. • 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 3.5 - 3.4 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.0 8.0 - 8.9 9.0 - 9.9 10.0 - 10.9 TOTAL CUM. TOTAL COL. AVG. 1-2 5.3 3-4 4-5 5.0 TOT. . 1000 .00 1000 .00 1000 .00 1000 1.50 987 1.55 854 1.59 785 2.50 532 2.19 304 2.73 304 2.73 308 2.59 38 2.00 13 127 51 44 51 44 13 13 133 70 253 228 196 70 13 127 127 95 19 19 405 582 70 19 38 13 25 000 15 13 6 36 57 139 177 7,45 19 19 7.11

AVERAGE SIG. HEIGHT = 2.26 FT AVERAGE HAVE PERIOD = 7.11 SECTION OF HEIGHT = .92 FT SG VARIANCE OF MAYE PERIOD = 2.57 SEC SQUESTION OF HEIGHT = .96 FT STANDARD DEVIATION OF PERIOD = 1.60 SECTION O

RESULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE HAVE GAGE LOCATED AT COAST GUARD LIGHT.

CALMS ARE OMITTED.

150 DESERVATIONS SUMMARY FOR AUG 64 PERIOD HEIGHT (FT) (SECS) CUM. RON 1000 .00 1000 .00 1000 .00 1000 1000 .00 1000 1.39 937 2.07 839 1.58 657 1.57 455 196 273 2.06 147 1.50 105 1.28 42 .75 14 1.00 .0 = 1.9 2.0 = 2.9 3.5 = 2.9 3.5 = 3.9 4.0 = 4.9 5.0 = 5.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.9 10.0 = 10.9 12.0 = 12.9 10.0 TAL CUM, TOTAL CUM, TOTAL 2 . 3 101.0 1.2 27 47 120 63 98 182 203 182 13 40 33 47 87 7 20 33 20 20 20 113 13 126 60 13 20 7 220 1000 7.87* 460 780 6.73 33 33 7.70 1.63 320 COL. AVG.

AVERAGE SIG. HEIGHT # 1.63 FT VARIANCE OF SIG. HEIGHT # .62 FT SQ STANDARD DEVIATION OF HEIGHT # .79 FT

AND ADDRESS OF THE PARTY OF THE

AVERAGE WAVE PERIOD # 6.98 SEC*
VARIANCE OF WAVE PERIOD # 4.09 SEC SO*
STANDARD DEVIATION OF PERIOD # 2.02 SEC*

145 0458	PVATION	5	•	104444	FOR 5												
PER100 (SECS)				₩€16	HT (FT	1											
.0 - 1.9	0-1	1-2	2-3	3	4-5	5-0	6-7	7-8	8-9	9-10	10-11	11-12	12-13	13 +	101.	101.0 1000 1000 1000	
3.0 - 3.4 3.5 - 3.9 4.0 - 4.9 5.0 - 5.9		26	7 7 7 21	7 21	7	21									41 14 83 117	1000 1000 959 945	.00
7.0 - 7.9 8.0 - 4.9 9.0 - 9.0 10.0 -10.9	,	21	21	14	7 14 26	2:	,								90	745 683 593	2.61
11.0 -11.9 12.0 -12.9 13.0 -13.9 14.0 -14.9		7	28 21	14	34 14 21	11	14	?	14	14	14	,		,	136	393 255 145	4.25 5.00 4.83 7.67
TOTAL CUM, TOTAL COL. AVG.	1000 4.50	193	\$00 \$00 \$.51	214 600 6.77	152	:2.	21	14.00	21 76 13.50	2 8 5 5	14	13,50	.00	12.50		•,	3.90
AVERAGE SIG. VARIANCE OF S STANDARD DEVI	15. MEI	G-1 2	5.39	2.32 5	v	4=: 1 10	20 5	PERIOD LAVE PE	8100 x		1 SEC 3.02						

RESULTS ORTHINED FROM THYINGTE REN AND THE RESSIONS TAKEN HITH & PRESSURE MAVE MADE LOCATED AT SCAST GUARD LIGHT

166 OBSER	VATIUN	8	9	UMMARY	FOR (00 100					
(BECS)				HE 10	HT (F	7)					
									CUM.	ROM	
	0-1	1.5	5+3	3-4	4-5	5-6	6-7	TOT . *	101.	AVG	
.0 - 1.9	15								1000	.00	
2.0 . 2.4									1000	.00	
2.5 . 2.9									1000	.00	
3.0 - 3.4		24	12					37	1000	1.83	
3.5 . 3.9	6	72	. 30	12		6		158	463	2.07	
4.0 - 4.9		48	30	36				110	835	2.59	
5.0 . 5.9	18	42	42	18		12	6	140		2.50	
6.0 - 6.9		42	54	6		16		122		2.05	
7.0 - 7.9	6	24	18	12		6		67		2.41	
8.0 . 8.9	30	42	84	12	18	14		201		2.41	
9.0 . 9.9	6	6	66	6	12			98		2.62	
10.0 -10.9			6	24	6	30		67		4.41	
11.0 -11.9							6	6		6.50	
12.0 -12.9						6	•	6		5.50	
13.0 -13.9			6					6		2.50	
14.0 -14.9		6	6					12		2.00	
TOTAL	78	307	340	127	36	90	12			2,55	
CUM. TOTAL	1000	455	614	265	139	102	12			.,	
COL. AVG.	7.25		7.32	6.71	9.17	8,25	8.50				
	1.65	3.15	1.32	0.71	4.1/	0,23	0.30	6.91			
VARIANCE OF SIG.								PERIUD	- 0.4	1 SEC.	
				FT 50		I. DIANE		AVE PER			SEC 80

147 OBSERVATIONS SUMMARY FOR NUV 65 PERIOD (SECS) HEIGHT (FT) 0-1 1-2 2-5 5-4 101.0 101.0 AVI.0 54 1000 .00 2.0 = 1.9 2.0 = 2.4 2.5 = 2.9 3.0 = 3.4 3.5 = 3.9 4.0 = 5.9 5.0 = 5.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.9 11.0 = 11.9 12.0 = 12.9 10.1 = 12.9 TOT. • AVL.
1000 .00
1000 .00
1000 .00
1000 .00
1000 .50
971 .44
906 1.41
748 1.55
511 1.93
345 1.60
201 1.06
86 1.35
43 .90
7 .50
1.38 21 29 65 158 237 165 144 115 43 27 34 27 100 54 110 34 48 61 14 61 14 61 14 7 367 435 1000 633 7,46° 7,19 14 48 48 34 7 27 14 7 150 197 7.36 48 48 7.64 7.33

AVERAGE SIG. MEIGHT # 1,38 FT VANIANCE OF SIG. MEIGHT # ,69 FT 8G STANDARD DEVIATION OF HEIGHT # ,63 FT AVEHAGE HAVE PERIOD # 7,33 SEC+ VARIANCE UP HAVE PERIOD # 3,58 SEC 80+ STANDARD DEVIATION UP PERIOD # 1,89 SEC+

REBULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE MAYE GAGE LUCATED AT CHAST GUARD LIGHT.

CALMS ARE OMITTED.

360 OBSER	EVATIONS	•	S	UMMARY	FOH D	EC 64	DEC 65				
PERIOD (SECS)				HEIG	-T (FT)					
										CUM.	ROM
	0-1	1-2	2.3	3 - 4	4.5	500	6-7	7 - 6	101.	TOT . *	AVG.
.0 - 1.9	17									1000	.00
2.0 - 2.4										1000	.00
2.5 . 2.9										1000	.00
3.0 - 3.4	19								3	1000	.50
3,5 . 3,9	19	28	8						51	997	1.17
4.0 - 4.9	5.5	50		17	3				110	946	2.06
5.0 - 5.9	17	103	19	2.5	3	6	8	3	189	636	2.38
6.0 . 6.9	17	86	31	36	•	17		3	186		2.27
7.0 . 7.9	8	53	14	28	6	17			107	460	2.87
8.0 . 8.9	17	69	25	28	8	5	3		158	353	2.30
9.0 . 9.9	25	50		8	8 8	3			96		1.79
10.0 -10.9	11	5.5			3		3		40	99	1.79
11.0 -11.9	6	11							17	59	1.17
12.0 -12.9	6	14							20	42	15.1
13.0 -13.9		3							6		.83
14.0 -14.9		11							11		1.50
15.0 -15.9										3	.00
16.0 -16.9		3							3	3	1.50
TOTAL	172	483	100	139	36	47	1 4	8			2.12
CUM. TOTAL	1000	828	344	244	106	69	5.5	8			
COL. AVG.	7.55	7.34	6.70	6.88	7.88	6.74	7.10	5,83	7.19		
AVERAGE SIG.	EIGHT .	2.1	2 4 7					PERTUD		9 SEC.	
VARIANCE OF SI	IG. Ht I	SHT E	2.17	FT 50	٧	ARIANC	E OF -	AVE PE	RIOD =	5.36	SEC 800

STANDARD DEVIATION OF HEIGHT # 1.47 FT STANDARD DEVIATION OF PERIOD # 2,31 SEC.

The state of the



AVERAGE SIG. HEIGHT # 2.45 ET AVERAGE -AVE FERIOD # 7.30 SEC*

VARIANCE OF SIG. HEIGHT # 2.87 FT SO VARIANCE OF AVE PERIOD # 5.27 SEC SC*

STANDARD DEVIATION OF HEIGHT # 1.70 FT STANDARD DEVIATION OF PERIOD # 2.30 SEC*

RESULTS CATAINED FROM THMINDTE DEN AND INK DECCRES TAKEN HITH A PRESSURE NAVE CAGE LOCATED AT COAST GUARD LIGHT CALMS ARE OMITTED.


Table A.4. CERC wave gage history for Steel Pier, Atlantic City, New Jersey.

		Pier Length (feet)	1,500	1,500	1,500	1,500	1,500		
		Distance from seaward end of pier	0	0	0	0	0		
	New Jersey	Water Depth (ft MSL)	17	17	17	17	17		
	LOCATION: Steel Pier, Atlantic City, New Jersey	Gage Range (ft MSL)		-7.7 to 17.3	-7.7 to 17.3	-7.7 to 17.3	–7.7 to 17.3		
	Steel Pier,	Gage Length (feet)	25	25	25	25	25		
	LOCATION:	Explanation	21 Apr. 1948 11 Aug. 1948 Gage removed.	6 Mar. 1962 Gage destroyed by storm.	6 May 1964 Lower half of gage destroyed.	20 May 1964 27 Dec. 1969 Gage and part of pier destroyed by fire.	8 Aug. 1970 1 Jan. 1971 Gage destroyed by storm; not replaced.		
	۷.	End of Proper Operation	11 Aug. 1948			27 Dec. 1969	1 Jan. 1971		
4 71,	21'N., 74°25' V	Beginning of Proper Operation	21 Apr. 1948	28 Sept.1957	31 Aug. 1962	20 May 1964			
CERC Form 174-74	COORDINATES: 39°21'N.,74°25' W.	Type of Gage	Step-resistance (SR), staff-spark plug type	SR staff-parallel type	SR staff-relay type	SR staff-relay type	Continuous-wire staff		

Table A-5. Number of analyzed records from Atlantic City, New Jersey. 1

	,												
YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1957									14	150	141	169	474
1958	151	154	70	180	186	180	186	186	179	175	179	131	1957
1959	114	112	186	164	152	161	163	120	177	173	157	136	1815
1960	172	93	153	138	168	148	148	143	123	162	153	136	1737
1961	35	101	119	79	136	111	169	132	122	182	153	171	1510
1962	186	167	15					2	129	168	176	173	1016
1963	178	160	162	175	165	172	186	178	111	180	179	180	2026
1964	186	159	185	159	83	178	186	185	168	188	179	186	2042
1965	185	162	186	178	150	66	129	141	105	166	164	181	1813
1966	168	141	185	169	161	178	142			154	178	183	1659
1967	186	147	183	177	162	172	182	175	163	181	176	179	2083
1968												119	119
1969	109	105	109	115	91	71	121	121	110	92			1044


¹Results before November 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the second BEB for 1957 to March 1964 and by the CERC method for April 1964 to 1967. Results after November 1968 obtained from 1,024-second digital records taken four times daily.

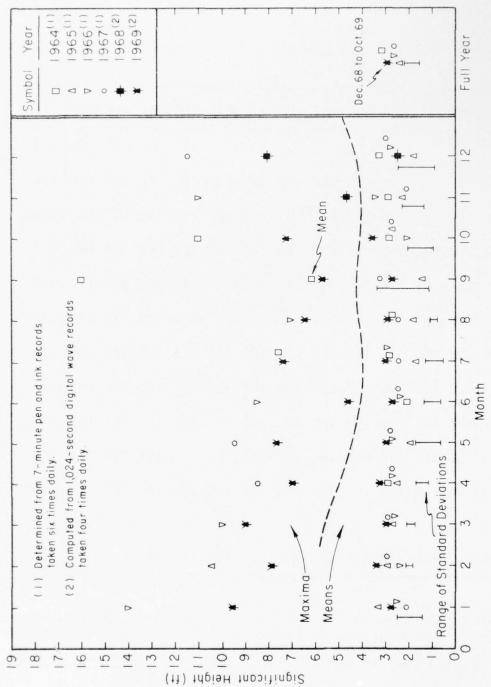

,,

The same of


Maxima, means, and standard deviations of significant height from Atlantic City, New Jersey. Figure A-7.

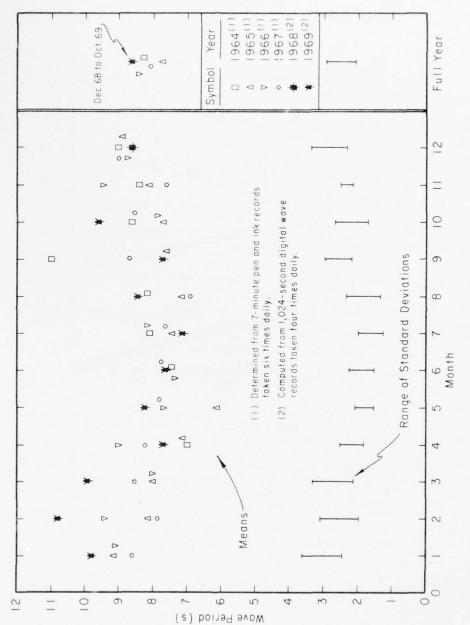

188

1,

Figure A-8. Means and standard deviations of wave periods for Atlantic City, New Jersey.

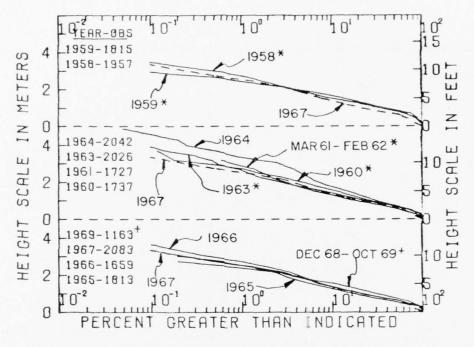

NOTE:

- = computed from 1,024-second digital wave records taken four times daily.
- = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Tables A-7 and A-8).
- Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-9. Annual cumulative significant height distributions from Atlantic City, New Jersey.

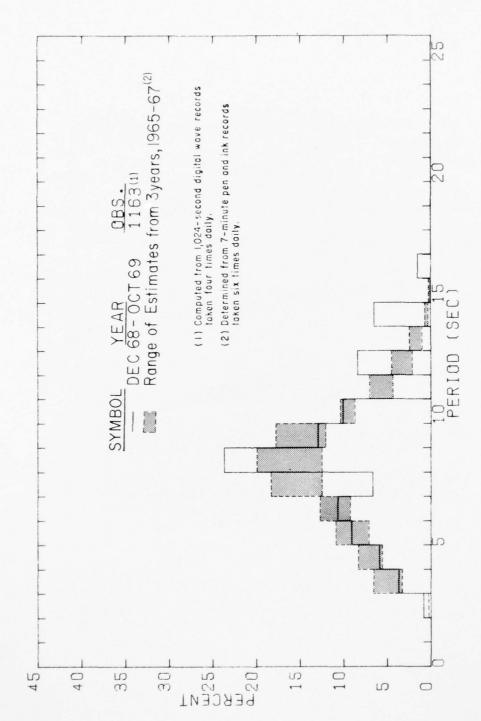


Figure A-10. Annual significant period distributions from Atlantic City, New Jersey.

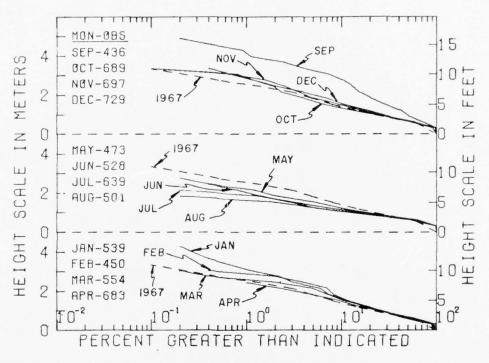


Figure A-11. Seasonal summaries of cumulative significant height distributions from Atlantic City, New Jersey; determined from 7-minute pen and ink records taken six times daily.

Table A-6. Wave climate for Atlantic City, New Jersey.
Distribution of significant height versus period (in observations per 1,000 observations).

539 0886	MVAIIUM	•		UNNANY		4* 65	*** **	JAN .	7								
(BECS)				HEIG	NT (FT)											
			2-3			3	4+7	7-6			10-11		12-15		*01.4	CUM.	
.0 . 1.4	0-1	1-5	4.,	3-4	***	3.0	9.07	/	•••	4010	10011	11-15	15013		1011	1000	
2.0 - 2.4	•															1000	
2,5 . 2,4															2		1.50
3.0 . 3.4	,	13													2.2		1.25
1.5 . 3.4		13													15		1.02
4.0 . 4.	,	19	20		2										50		85.5
5.0 - 5.4		15	11	10	11	7									7.5		2.91
6.0 - 6.9	7	2.5		17	11			2							62		3.00
7.0 . 7.4		45	24	17		7		11							131		5.20
8.0 . A.4	1.1	44	50					11		2					104	425	2.50
9.0 . 9.4	1.3	47	1.0		7						5				136	521	2.65
10.0 -10.4	1.9	52	2.6	11	•	7									149		3.31
11.0 -11.4	15	33	20		7	4									*1	533	2.30
0.51. 0.51	•	50			2										67	142	1.53
13.0 -13.0	/1	33	•	2											54		1.53
10.0 -14.4		7		2											19	1 *	1.60
TOTAL	128	410	173	102	7.	39	13	5.6	•	11	7				1		2.61
CUM. TOTAL	1000	672	462	544	187	111	72	50	25	5.5							
COL. AVG.	4.300		8.75	7.68	7. 49	8.31	8.50	8.77	10.10	8.83	10.25	.00	10.30	10.50			
AVERAGE STG.	HETGHT !					VEHAGE		PERTOD									
VARIANCE OF S				FT 80		ARIANC											
STANDARD DENT	ATTON O	MF 15	HT .	2.08 F	1	TANDAR											
REBULTS DETAI					INK .	CCORDS	TAKEN	HITH	4 8TE		ISTANCE	RELA	*				
MAYE CAC	E LOCATI																

450 OBSE	RVATION	5	8	UMMARY	FOR F	ER 65	FEB 66	FEB 6	7					
PERIOD (SECS)				HEIG	HT (F	")								
													CUM.	RO.
	0 - 1	1 - 2	2 - 3	3 - 4	4-5	506	6.7	7 . 8	8-9	9-10	10-11	TOT	101.4	AVG
.0 - 1.9	2												1000	.00
2.0 . 2.4													1000	
2.5 . 2.9	2											5	1000	
3.0 . 3.4		33										33		1.50
3,5 . 3,9		16	7									55		1.80
4.0 - 4.9		38	5.0	7								65		5.05
5.0 - 5.9	u	27	24	5.5	7	4						89		2.65
6.0 - 6.9	9	5.5	38	16	13	7		7				111		3.00
7.0 . 7.9	13	20	55	5.0	13	7	5	9	2			105		3.12
8.0 . 8.9	7	49	3.5	20	11	5	5	9	2			136	572	2.89
9,0 . 9,9	1.1	5.8	36	13	7	4	2	2	4	5		140	457	2.66
10.0 -10.9	9	36	0.5	7	4	5	4		9	7	5	105	500	3.71
11.0 -11.9	9	44	16	4	2	4		4	5	2		91	192	2.79
12,0 -12,9		42	4	4						2	5	56	100	2.42
13.0 -13.9	7	7	7		2							5.5	45	1.80
14.0 -14.9	1.1	1.1										5.5	5.5	1.00
TOTAL	84	402	7.55	113	60	31	11	31	20	16	4			2.72
CUM. TOTAL	1000	916	513	287	173	113	58	71	40	20	4			
COL. AVG.	9.70*	8.47	4.05	7.74	8.06	8.14	9,30	8.71	9,83	10.93	11.50	8.44		
AVERAGE SIG.	HEIGHT	2,7				VERAGE				44 St				
STANDARD DEVI				FT 80		TANDAR					2.74			

SUMMARY FOR MAR 65 MAR 66 MAR 67 554 ORSERVATIONS PERIOD HEIGHT (FT) (SEC5) CUM, ROM TOT,* AVG,* 1000 .00 1000 .00 1000 1.62 971 1.69 902 2.18 881 3.00 865 2.62 699 3.04 552 2.65 400 2.74 209 2.62 209 2.55 2 1.50 2,70 2+3 3+4 8-9 9-10 10-11 TOT.* 2.0 - 1.9 2.0 - 2.0 2.5 - 2.9 3.6 - 3.0 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 10.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 TOTAL CUM. TOTAL CUM. TOTAL 6.7 7.8 1 - 2 29 61 76 106 146 148 155 155 22 14 29 20 22 47 67 67 67 13 9 2 397 933 23 20 25 32 31 38 25 13 14 27 25 18 13 7 7 11 7 5 7 9 11 11 235 536 7.97 125 303 7.61 29 16 2 2 49 20 4 2 9,62 9,94 11,50 12,50 8.17

AVERAGE SIG, HEIGHT # 2.70 FT AVERAGE WAVE PERIOD # 8.17 SEC*

VARIANCE OF SIG, HEIGHT # 3.19 FT SO VARIANCE OF HAVE PERIOD # 5.48 SEC SO*

STANDARD DEVIATION OF HEIGHT # 1.79 FT STANDARD DEVIATION OF PERIOD # 2.34 SEC*

RESULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT STEEL PIER CALMS ARE OMITTED.

683 DBSE	PVATIONS	3	5	UHHARY	FOR A	PR 64	APR 65	APR 6	6 APR	67		
(SECS)				HEIG	HT (FT)						
	2-1		1-1	3+4	4=5	5=6	6=7	7=8	8-9		CUM.	ROM
.0 - 1.9	0 - 1	1-5	5.3	3-4	4.5	3.0	6-/	/ = 0	0.4	707.*	101.0	
2.0 - 2.4	1									,	1000	.00
2.5 . 2.9		3								;	999	
3.0 - 3.4	4	13	5							20	996	1.43
3,5 . 3,9	3	26	16	1						47		
4.0 . 4.9	1	16	25	18						60		
5.0 . 5.9	3	13	41	2.0	15	6	3			101		3.09
6.0 - 6.9		37	34	19	12	10	6			117		3.01
7.0 - 7.9	3	67	45	25	15	6	6		3	170		2.73
A.0 . A.9		72	47	5.5	6	10	3	7	4	171		2.89
9.0 . 9.9	1	70	31	50	9	7	4	1	1	146		2.64
0.0 -10.9	3	29	13	10	1	1		1	1	61		84.5
1.0 -11.9		85	15	6		. 1	1	1		50		2.41
2.0 -12.9		9	1.3	1	1	1	1			28		2.71
3.0 -13.9	1	9	4	1	3					19		2.27
4.0 -14.9		1	3							4		2.17
OTAL	55	394	287	145	61	44	25	15	10			2.68
UM. TOTAL	1000	978	584	297	152	91	47	55	10			
OL. AVG.	6.27*	0.11	7.65	7,60	7.69	7.97	8.03	9.25	8.64	7 - A .		
									-			
VERAGE SIG.	HEIGHT	2,6	8 FT					PERIOD		85 SEC		
ARTANCE OF S	IG. HEI	HT E		1.51 F		TANDAR		AVE PE			8 350	304

473 OBSERVATIONS SUMMARY FOR MAY 65 MAY 66 MAY 67
PERIOD HEIGHT (FT)
(8805)

CUM. ROP TOT.* AVG.* 1000 .00 1000 1.50 2.0 = 2.0 2.0 = 2.0 2.5 = 2.9 3.0 = 3.0 4.0 = 4.9 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.9 11.0 = 11.9 12.0 = 12.9 TOTAL CUM. TOTAL COL. AVG. 0 - 1 1.5 2 - 3 8.9 9.10 TOT.* 2 1000 1.50 998 2.00 989 2.03 949 2.31 656 2.41 690 2.70 565 2.30 374 2.50 191 2.75 55 2.70 13 2.83 6 1.63 2.46 17 55 42 55 70 53 21 27 80 82 89 88 40 27 8 21 25 27 168 125 191 183 136 15 6 13 6 5 5 27 42 334 556 6.78 222 30 51 4.00 6 438 1000 994 10:50* 7,28 99 8 21 8,50 9.00

AVERAGE SIG. HEIGHT # 2.46 FT AVERAGE WAVE PERIOD # 7.21 SEC*
VARIANCE OF SIG. HEIGHT # 1.97 FT SQ VARIANCE OF WAVE PERIOD # 3.66 SEC SQ*
STANDARD DEVIATION OF MEIGHT # 1.25 FT STANDARD DEVIATION OF PERIOD # 1.92 SEC*

RESULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN HITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT STEEL PIER # CALMS ARE OMITTED.

PERIOD				HEIG	HT (FT)						
(8505)												
											CUM.	ROM
	0 = 1	1 = 2	5=3	3 = 4	405	5 = 6	607	7=8	8 . 9	TOT. *	TOT. *	AVG. *
.0 . 1.9											1000	.00
5.0 = 5.4											1000	.00
2.5 . 2.9		ã								5	1000	1.50
3.0 - 3.4		8	5							9	998	1.70
3,5 . 3,9		25	4							85	989	1.63
4.0 = 4.9		28	44	4	2					7.6	960	2.23
5.0 - 5.9		35	42	21	4					98	883	2.46
6.0 . 6.9	5	57	61	6	6	2				133	784	15,5
7,0 = 7,9	4	A1	100	17	5	8				215	652	2.29
B.0 - A.9	8	112	93	34	U		4			254	139	5.22
9,0 . 9,9	8	86	30	1.3	4			5	2	125	56	2.18
10.0 -10.9		13	6	8		5				28	61	2.50
11.0 =11.9		6	6				5		5	15	32	3.37
12.0 -12.9		5		4	2			é		9	5 7	4.10
13.0 -13.9		2			4	5				8	8	
TOTAL	21	434	386	106	27	13	6	4	4			5.29
CUM, TOTAL	1000	979	545	159	53	27	13	8	4			
COL. AVG.	8.50*	7.47	7,23	7.91	8 . 43	8.64	9,50	11.00	10.50	7.52		

AVERAGE SIG. HEIGHT # 2.29 FT

VARIANCE OF SIG. HEIGHT # 1.15 FT 80

ATANDARD DEVIATION OF HEIGHT # 1.06 FT

AVERAGE WAVE PERIOD # 7.52 SEC*

VARIANCE OF WAVE PERIOD # 3.60 SEC 80*

STANDARD DEVIATION OF PERIOD # 1.90 SEC*

*

が対

639 DRSERVATIONS SUMMARY FOR JUL 64 JUL 65 JUL 66 JUL 67

PERIOD HEIGHT (FT) (SECS)

CUM. HON TOT.* AVG.* 1000 .00 1000 .00 .0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 12.9 13.0 - 14.9 TOTAL CUM. TOTAL CUM. TOTAL TOT.* 2 . 3 1.2 TOT: AVG.
1000 .00
1000 .00
1000 .00
1000 150
994 2.33
975 2.23
940 2.74
887 2.55
746 2.37
462 2.47
167 2.49
60 2.50
24 3.10
16 5.63
11 1.50
9 3.17
2.47 19 23 56 116 117 53 13 34 55 141 284 276 127 36 8 11 5 116 100 45 19 2 13 2 2 365 797 7.72 2 144 219 7.81 3 632 16 28 7.90 11 COL. AVG. 10.50* 8.40 7.81 8.50

AVERAGE SIG. HEIGHT # 2.47 FT VARIANCE OF SIG. HEIGHT # 1.06 FT SQ STANDARD DEVIATION OF HEIGHT # 1.03 FT AVERAGE WAVE PERIOD # 7.82 SEC* VARIANCE OF WAVE PERIOD # 2.81 SEC SG* STANDARD DEVIATION OF PERIOD # 1.68 SEC*

RESULTS OBTAINED FROM Y-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT STEEL PIER CALMS ARE OMITTED.

501 DASERVATIONS SUMMARY FOR AUG 64 AUG 65 AUG 67 PERIOD HEIGHT (FT) (SECS) CUM. ROW TOT:* AVG.* 1000 .00 1000 .00 1000 2.50 978 2.00 97 .0 ~ 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 4.0 - 6.9 7.0 - 7.9 9.0 - 9.9 10.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 14.0 - 14.9 15.0 - 12.9 17.0 - 14.9 0=1 1-2 2 . 3 3-4 4-5 TOT . * 20 86 140 140 188 136 136 136 136 136 12 44 66 78 54 32 70 98 48 12 2 10 104 2 2 14 6 10 24 184

AVERAGE SIG, HEIGHT # 2.34 FT
VARIANCE OF SIG, HEIGHT # .89 FT 50
STANDARD DEVIATION OF HEIGHT # .94 FT AVERAGE WAVE PERIOD # 7.43 SEC*
VARIANCE OF WAVE PERIOD # 8.35 SEC SQ#
STANDARD DEVIATION OF PERIOD # 2.09 SEC* .94 FT

7.43



PERIOD (SECS)				HEIGH	HT (FT)									
•													*** *	CUM.	ROM
	0-1	201	5.2	3=4	4=5	5=6	6-7	7-8	8-9	4-10	10-11	11-12	101.	1000	.0
.0 - 1.9														1000	
2.0 . 2.4														1000	
2.5 - 2.9														1000	
3.0 - 3.4		13											13		
3,5 . 3,9	1	19	10										30		1.7
4.0 - 4.9	3	28	35	9	- 1								73		2.2
5.0 . 5.9		20	15	15	4	4	3						65		2.1
6,0 . 6,9	1	23	9	12	10	12	3	1	1				73	619	3.4
7.0 - 7.9	4	38	38	29	10	3	1		1	1			126	746	2.7
8.0 - 5.9		81	65	9.6	10		3		1				218	050	2.5
9.0 - 9.4		115	64	23	17				3				235		2.3
0.0 -10.9	1	55	5.5			1	1	3		1			100		2.1
1,0 -11,0	i	53	7	1	1					1	3	1	44	67	3.0
2.0 -12.9	- 1	4		ī									10	5.2	2.1
		- 7		•									3	7	1.0
3,0 =13,9		1													
4,0 =14,4	41	421	270	144	60	25	16		7		7	1			2.5
O.TAL	1000	959	538	269	125	65	41	25	20	13		1			
UM. TOTAL			8.09	7.93	8.18	7.03	7.95	9.17	8.30	0.83	10.90	11,50	0.20		
OL. AYG.	4.014	8.28	9 * 0 4	1 4 4 3	0.10		,								

7 085E				-	-	04 44 F	QY 65	HQY .	MOA 6	17					
PER100 (SECS)				HE 1 91	HT (FT	,									
.0 - 1.*	0-1	1+2	1-1	3-4	**5	1	407	7.0	•••	4-10	10-11	11-12	101.0	1000	.00
2.0 . 2.4													6	1000	1.50
2.5 . 2.4													2.2	994	1.37
3.0 . 3.4	3	1.											16		1.68
1.5 - 1.4	1	10	23	17									56		2.60
4.0 - 4.9	3	17	24	13	10	10	1						95		5.08
5.0 - 3.9	,	34	33	6	11	10		1	1				115	615	3.16
7.0 - 7.		3.		17		î	1		3				115		2.67
4.0 - 4.4		62	36	10		•							1 . 0		10.5
	10	73	53	23	10	7		1					1.0		2,45
10.0 -10.	10	46	24	1.0		1	1	1			1	1	110		5.40
11.0 -11.4		11	2.2	7	1	3	1		3	1			73		3.77
12.0 -12.9	,		1.	11	1				1	1			**		2.61
13.0 -13.4	1	1		S	•					1			1 6		3.50
14.0 -14.4	i	3	3		1								•		2.17
15.0 -15.4		1								-			,	1	2.45
TOTAL	• 2	337	280	128		43	14	10	9	•	•	1			
CUM. TOTAL	1000		571	286	150	5	44	34	54	16		!			
COL. AVG.	4.62*	8.09		8,66	8.32	7.27	8.00	10.30		10.50	11.23	10,50	•,•		
10000															
AVERAGE BIG.	HETOHT		5 .1			AVERAGE VARIANC		ATAL BE			26 850				
VARIANCE OF S	IG. MEI	GHT .		FT 80		STANDAR	0 054	****							
STANDARD DEVI	ATION O	HEIG	HT .	1.78 7	1	BIANDAR	0 064	14.104	OF FE		,,				
# CALMS ARE	E LOCAT	ED AT	NUTE P	PIER	INK	RECORDS	TAKE	N W1TH	A 87	ep nes	ISTANC	E RELA	•		

PER100 (46C3)				HE 1 61	HT (FT)									
												11012	***	CUM.	RO-
	0-1	1 - 2	5.3	3.4	4.5	5.0	607	7.8	6-7	4010	10-11	11016		1000	.00
.0 . 1.9	35												3	1000	
.0 - 2.4	1	1											,	997	.00
.5 . 2.9													20	997	1.36
3.0 - 3.4	3	16											25		1.50
1,5 . 3,0		16	4										52		2.1
.0 . 0.0	1	2.5	51	7	120								61		2.6
.0 . 5.9		19	16	10		•	-						*5		3.60
.0 . 6.9	1	21	15	19	19	•	7	?					76	744	3.50
.0 - 7.4		55	16	10	11	,	•	,	1	1			132		2.60
.0 . 4.9	4	51	37	12	10		7	•	1	1		3	169	414	3.11
.0 - 9.9	7	69	34	14	7		7	,	,			,	153		2.4
.0 -10.9	15	60	34	18	11	3	•	1		,			**3		2.5
.0 -11.9	7	41	25	5	7	2	1					1	67	120	2.1
P.52. 0.5	,	38	23			3							54		1.3
3.0 -13.0	1	15		5	1	- 1							18		3.7
.0 -14.9		3	1	5	5	,							.,	- 1	5.5
5.0 -15.9					200	- 1							•		2.0
DTAL	60	388	237	110	.0	36	30	1.		15					
JM. TOTAL	1000	450	932	295	185	100	70	. 40	. 21			10.17	0.91		
DL. AVG.		A . 88	9.00	8,85	0.69	4.65	8.55	8.21	4.00	9.17	.00	10.11			

(3ECS)				MEIG	T (FT)											
																CUM.	
.0 - 1.4	0-1	1-2	5-3	3-4	4.5	3-4	4=7	7 - 6	***	4-10	16-11	11-18	15-11	12 4	101.0		.00
2.0 . 2.4																1000	
.5 . 2.4																	1.3
1.0 - 3.4	2	13	1												16		1.4
3.5 - 3.4	2	1 6		1											27		1.6
.0 - 4.4	1	23	28	•	1										61		5.5
5.0 - 5.9	2	25	26	16	10	5	1								87		2.7
.0 - 6.4	3	34	34	16	13	7	ż	1							113		2.6
7.0 - 7.9	A	57	52	21	13	5	3	2	1	1					156		2.6
A			53	24		4	3	3	1	1					171		2.6
.0 - 9.9		67	16	17	•	4		3		1					154		2.6
0.0 -10.9		40	20		5	3	1	2		1	1				*3		2.7
.0 -11.4	4	1.0	13	4	3	2	1	2	1	1	1				52		2.4
2.0 -17.9	5	13	•	3	1	1					1				33	45	2.6
5.0 -13.9	2	7	3	1	5	1				1	1				1 *		3.3
.0 -14.	2	2	3	1	1	1									15		3.7
5.0 -15.4															1		8.5
.0 -16.4	10.00														1	1	
TAL	44	387	540	153	64	33	17	14	•				1	1			2.6
H. TOTAL	1000	951	564	274	151	87	54	37	5.3	14		3		1			
L. AVG.	0.130	8.15	7.86	7.93	8.21	4.52	6.80	9,35	4.55	10.41	15.00	15.52	13.34	13.47	6.19		
PERAGE SIG.	IG. MEI	GHT #	3.00	FT 50	V	ARIANC	E OF W	PERIOD AVE PE	RIOD .	5.	91 860						

RESULTS OBTAINED FROM THUTHE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GACF LOCATED AT STEEL PIER . CALMS ARE OMITTED.

1163 OBS	ERVATION	3	8	UMHARY	FOR	11 MONT	HS DEC	68 THROU	GH OCT	69			
PERIOD (SECS)				SIG.	HEIGH	(FT)							
			2-1	3-4				7-8	• - 0		101.*	TOT	
	0 - 1	1-2	5.3	3.4	4.5	5.6	6 - 7	7.0	8.9	9 . 10	101.0		0.00
0.09												1000	
2.0 - 2.9	1	u	3								8		1.72
3.0 - 3.9		15	19	3							3.7		5.50
4.0 - 4.9		15	26	18	3						61		2.64
5.0 - 5.9		19	29	11	15	15					91		3.35
6.0 - 6.9		13	36	28	18	17	2	1			107		3.40
7.0 - 7.9		12	26	14	9	4	,	,			67		3.14
8.0 - 8.9	2	71	86	46	15	8	5	i	3		237		2.83
9.0 - 9.9	5	45	40	16	13	6	3	1	1	1	127		2.80
10.0 -10.9	3	37	2.5	19	9	4	2	3	1		101		2.89
11.0 -11.9							_	-					0.00
12.0 -12.9	1	34	10	14	12	10	2	1	1		84		3.09
13.0 -13.9													0.00
14.0 -14.9	7	5.5	6	ü	5	7	7	4			65		3.24
15.0 -15.9												15	0.00
16.0 -16.9	3	7	1	1	1			5			15	15	2.32
TOTAL	18	565	307	174	99	65	5.5	18	6	5			5.96
CUM. TOTAL	1000	286	690	383	508	110	48	26		5			
COL. AVG.	12.60	9.15	7.80	8.21	8.69	9.03	10.58	10.64	9,50	10.00	4.65		
AVERAGE SIG.	HEIGHT .	2.9	4 FT			VFRAGE	WAVE	PERIOD	Α.	67 SEC			

VARIANCE OF SIG. HEIGHT # 2,32 FT SQ STANDARD DEVIATION OF HEIGHT # 1,52 FT AVERAGE MAVE PEMIOD 8.67 SEC* VARIANCE OF MAVE PERIOD 8.643 SEC 8G* STANDARD DEVIATION OF PERIOD 8.2.90 SEC* RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN HITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT STEEL PIER.

* CALMS ARE OMITTED.

Table A-7. Comparison of results from different pen and ink wave record analysis methods, Atlantic City, New Jersey.

Dates of	Significant	heigh	ts1	Significant	t perio	ds ²
data sample reanalyzed by CERC method	Correlation between heights	A (ft)	В	Correlation between periods	C (s)	D
Oct. to Nov. 1958	0.93	0.47	0.91	0.87	1.68	0.79
Oct. to Nov. 1961 Oct. 1961 Nov. 1961	0.88	0.12 0.19 0.03		0.66	1.90 2.87 1.13	0.73 0.64 0.79
Jan. to Feb. 1964 Jan. 1964 Feb. 1964	0.93 0.94 0.91	0.23 0.23 0.23		0.74 0.85 0.67	1.37 1.59 1.13	

¹Significant height from CERC method

 $= A + B \times (significant height from old method).$

²Significant period from CERC method

= $C + D \times (significant period from old method)$.


Table A-8. Regression equations used to compensate significant height statistics for Atlantic City, New Jersey.

Date	Compensation equations (ft)
1958 to 1959	$H_{NEW} = 0.47 + 0.91 H_{OLD}$
1960 to Mar. 1964	$H_{NEW} = 0.17 + 0.79 H_{OLD}$
Apr. 1964 to 1971	No compensation

NOTE:

 $H_{\it NEW}$ = estimate of significant height that would have been obtained by the CERC method of pen and ink record analysis.

 H_{OLD} = significant height obtained by old method of pen and ink record analysis.

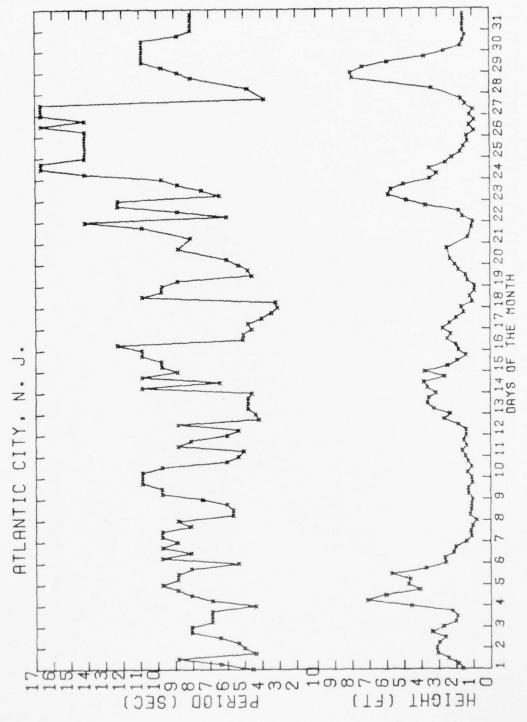

wave heights and periods, December 1968.

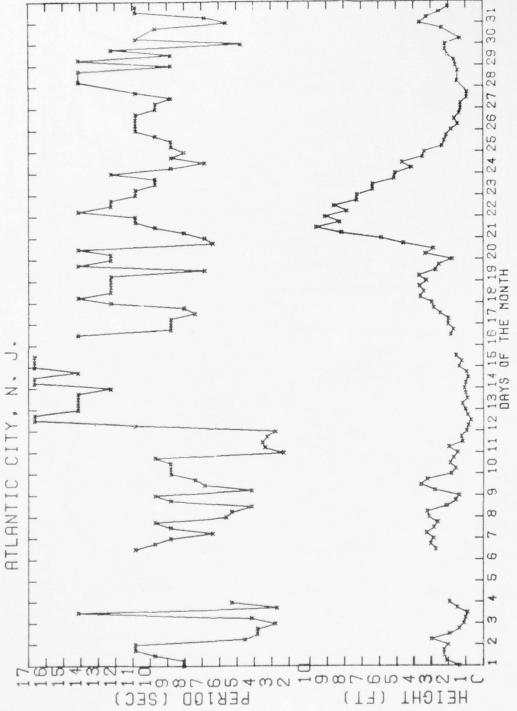
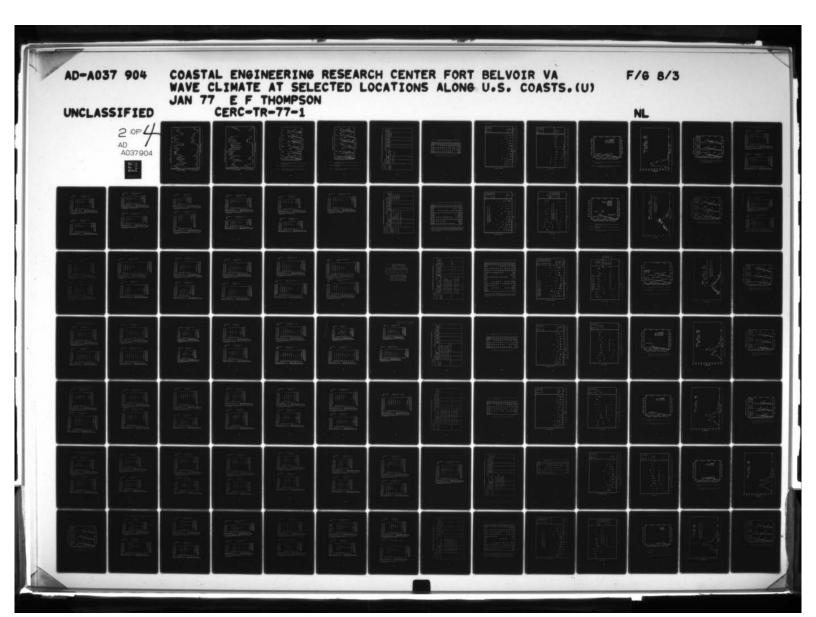
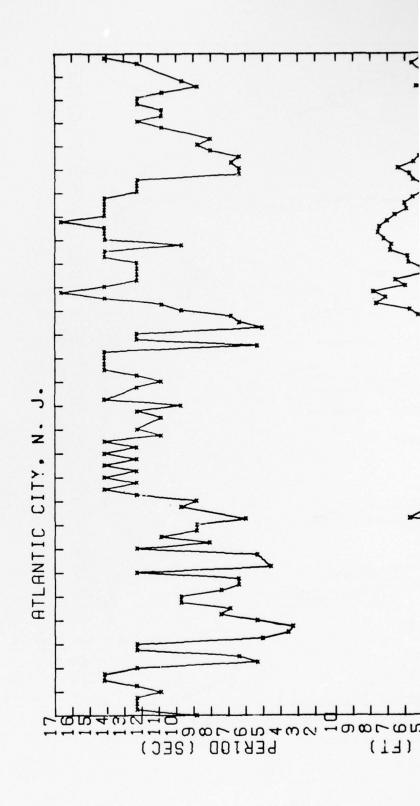


Figure A-13. Time history of significant wave heights and periods, January 1969.








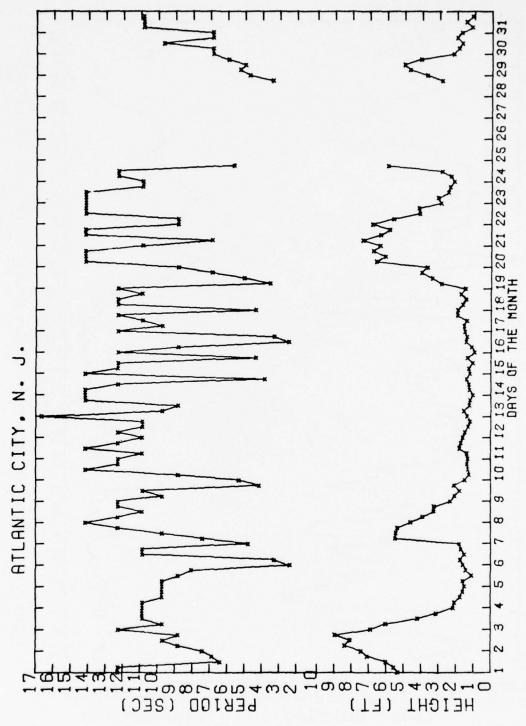


Figure A-15. Time history of significant wave heights and periods, March 1969.

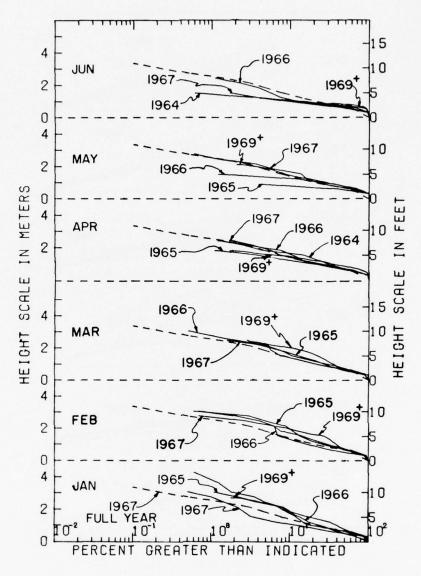


NOTE:

= computed from 1,024-second digital wave records taken four times daily.

Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-16. Monthly cumulative significant height distributions for Atlantic City, New Jersey.

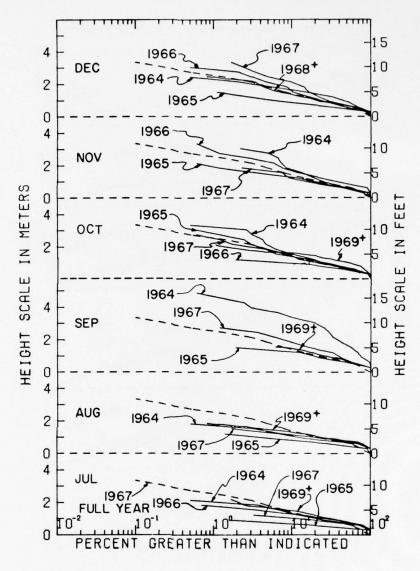

NOTE:

= computed from 1,024-second digital wave records taken four times daily.

Unmarked = determined from 7-minute pen and ink records taken six
 times daily.

Figure A-17. Monthly cumulative significant height distributions for Atlantic City, New Jersey.


Table A-9. CERC wave gage history for Thimble Shoals Channel, Chesapeake Bay-Bridge Tunnel, Virginia.

		, Virginia	Pier Length (feet)	009			
		LOCATION: Thimble Shoals Channel, Chesapeake Bay-Bridge Tunnel, Virginia	Distance from seaward end of pier	0 (on northwest side of pier)			
		Chesapeake	Water Depth (ft MSL)	37			
		hoals Channel,	Gage Range (ft MSL)	-8 to +17			
		Thimble S	Gage Length (feet)	25			
		LOCATION:	Explanation	28 Mar. 1968 21 Jan. 1970 Ship ran into bridge.		10 Dec. 1971 18 Oct. 1974 Gage discontinued.	
		w.	End of Proper Operation	21 Jan. 1970	23 Nov. 1971	18 Oct. 1974	
7	7.4	58' N., 76°07' V	Beginning of Proper Operation	28 Mar. 1968	4 Mar. 1970 23 Nov. 1971	10 Dec. 1971	
CERC Form 174-74	18 Mar 74	COOKDINATES: 36°58' N., 76°07' W.	Type of Gage	Step-resistance, staff-relay type			

Table A-10. Number of analyzed digital records from Chesapeake Bay-Bridge Tunnel, Virginia.


YR MB	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NBV	DEC	TOT
1971			37	102	98	83	80	107	102	108	59	82	858
1972	104	116	123	108	120	92	96	112	82	106	80	75	1214
1973	74	70	87	61	44	64	56	90	80	81	84	44	825
1974	84	95	68	61	79	79	55	60	28	41			650

 $^{^1\}mathrm{From}\ 1,024\mathrm{-second}\ \mathrm{records}\ \mathrm{taken}\ \mathrm{four}\ \mathrm{times}\ \mathrm{daily}.$

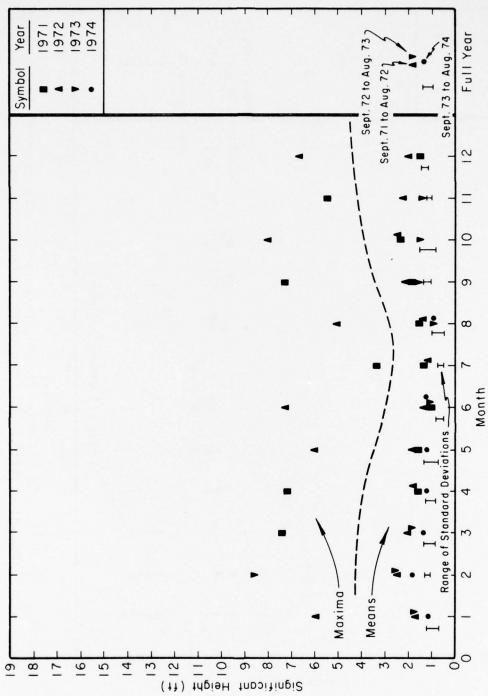


1

Maxima, means, and standard deviations of significant height from Chesapeake Bay Bridge-Tunnel, Virginia; computed from 1,024-second digital wave records taken four times daily. Figure A-18.

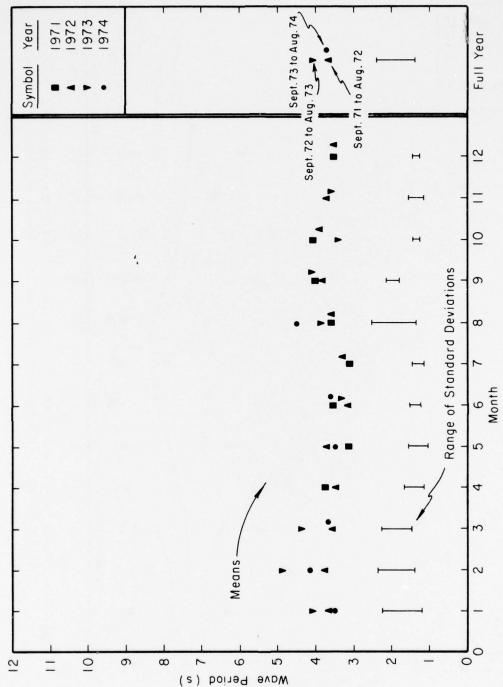


-

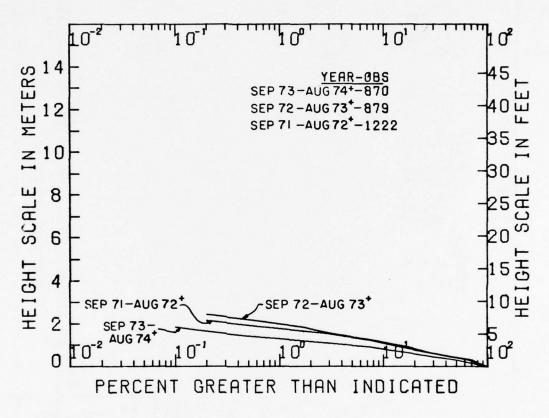

NOTE:

= computed from 1,024-second digital wave records taken four times daily.

Figure A-20. Annual cumulative significant height distributions from Chesapeake Bay Bridge-Tunnel, Virginia.

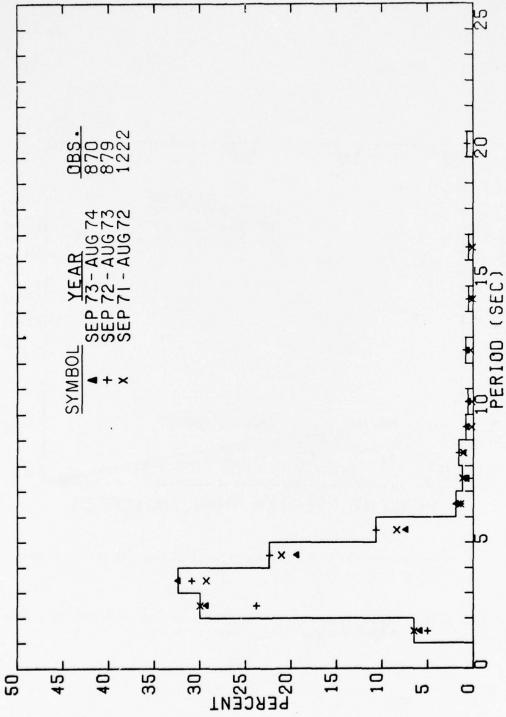

Annual significant period distributions from Chesapeake Bay Bridge-Tunnel, Virginia; computed from 1,024-second digital wave records taken four times daily. Figure A-21.

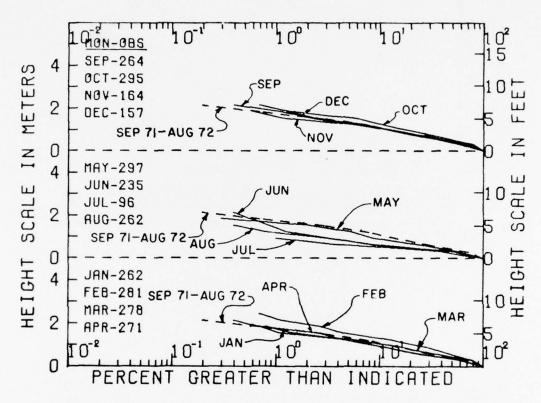


Figure A-22. Seasonal summaries of cumulative significant height distributions from Chesapeake Bay Bridge-Tunnel, Virginia; computed from 1,024-second digital wave records taken four times daily.

Table A-11. Wave climate for Chesapeake Bay-Bridge Tunnel, Virginia. Distribution of significant height versus period (in observations per 1,000 observations).

262 085FR	VATION	s	S	UMMARY	FOR J	AN 72	JAN 73	JAN 7	4	
PERIOD (SECS)				316.	HEIGH	T (FT)				
(0000)										
									CUM.	RUN
	0-1	1 = 2	5.7	3 - 4	4.5	5.6	6-7	TOT.	TOT.	AVG.
0.09									1000	0.00
1.0 - 1.9	42	19						61	1000	. 61
5.0 - 5.9	130	157	15	4				286	939	1.13
3.0 - 3.9	8.8	115	73	15	8			598		1.65
4.0 - 4.9	65	65	42	5.2	31	4	4	533	355	2.14
5.0 - 5.9	38	11		8	4	4	4	69		1.83
6.0 - 6.9	4	4						8	53	1.00
7.0 - 7.9	11	11						23	46	1.00
8.0 - 8.9	15							15	23	.50
9.0 . 9.9									8	0.00
10.0 -10.9									8	0.00
11.0 -11.9									8	0.00
12.0 -12.9									6	0.00
13.0 -13.9									8	0.00
14.0 -14.9	4							4	8	.50
15.0 -15.9									4	0.00
16.0 -16.9	4							4	4	
TOTAL	401	363	130	50	42	8	8			1.52
CUM. TOTAL	1000	599	237	107	57	15	8			
COL. AVG.	3,88*	3.42	3.71	4.19	4.41	5.00	5.00	3.74		

AVERAGE SIG. MEIGHT = 1.54 PT
VARIANCE OF SIG. MEIGHT = 1.22 FT SG
STANDARD DEVIATION OF MEIGHT = 1.10 FT

AVERAGE WAVE PERIOD = 3.73 SEC*
VARIANCE OF WAVE PERIOD = 2.77 SEC SQ*
STANDARD DEVIATION OF PERIOD = 1.66 SEC*

RESULTS OBTAINED FHOM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT THIMBLE SHOALS CHANNEL.

* CALMS ARE OMITTED.

281 085	RVATION	5	8	UMMARY	FOR F	FB 72	FEB 73	FEB 7	v			
PERIOD				SIG.	HEIGH	T (FT)						
(SECS)												
												0.0
	0-1	1.2	2-3	3-4	4+5	5+6	6-7	7-8	8-9	TOT.*	TOT.	RON AVG. *
0.09	٠.	• • •			• • •	,	•	, - •				0.00
1.0 - 1.9	28	7								36		
2.0 - 2.9	64	103	28							196		1.32
3.0 - 5.9	64	93	78	64	7					306		2.03
4.0 - 4.9	36	75	43	60	71	4	4			595		2.78
5.0 - 5.9	7	7	14	21	71	1 4	11	4	4	93	171	4.08
6.0 - 6.9		4	4				4		4	14	78	4.75
7.0 . 7.9											64	0.00
8.0 . 8.9	4	14								18	64	1.30
9.0 - 9.9		7	7							14	46	2.00
10.0 -10.9	7									7		.50
11.0 -11.9												0.00
12.0 -12.9	7	7	7							21		1.50
13.0 -13.9												0.00
14.0 -14.9			4							4	4	2.50
TOTAL	217	317	185	146	89	16	18	4	7			5.50
CUM. TOTAL	1000	783	466	185	135	46	58	11				
COL. AVG.	3.78*	4.01	4.58	4.21	4.54	5.30	5.50	5.50	6.00	4.21		
AUEDICE	ur * c * *							010100	- "			
VARIANCE OF S								PERIOD AVE PE			5 SEC	
STANDARD DEVI								ATION				
ALMINAND DEAL	A . 1014 O			1.73	, 3	ATUAT	O DEAT			100 -		0.00

AVERAGE SIG. HEIGHT = 1.79 FT

VARIANCE OF SIG. HEIGHT = 1.27 FT SQ

STANDARD DEVIATION OF HEIGHT = 1.13 FT

AVERAGE WAVE PERIOD = 3.84 SEC*

VARIANCE OF WAVE PERIOD = 3.57 SEC SQ*

STANDARD DEVIATION OF PERIOD = 1.89 SEC*

RESULTS OBTAINED FROM 1024-8FCUND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT THIMBLE SHOALS CHANNEL,

CALMS ARE OMITTED.

271 OBSERVAT	1048		UMMARY	FOR A	PR 71	APŘ 72	APR 74			
PERIOD			SIG.	HEIGH	t (FT)					
(SECS)					1					
									CUM.	HOW
0	-1 1-2	5.3	3-4	4.5	5.6	6-7	7.8	101.	TOT.*	AVG
0.09	15								1000	0.00
	22 7							30	1000	.75
2.0 - 2.9	03 196	5.5						326	970	1.25
	22 133	66	55	4				352		1.50
	44 55	26	26	10	15			187		2.30
	41 15	•	15		15	4	4	62		2.05
6.0 . 6.9	4				-		-	4	. 55	.50
	4									
7.0 - 7.9	•							4	19	
8.0 - 8.9	1							7	15	.50
9.0 - 9.9									7	0.00
10.0 -10.9									7	0.00
11.0 -11.9									7	0.00
12.0 -12.9	7							7	7	.50
	69 406	114	63	55	18	4	4			1.55
CUM. TOTAL 10		225	111	48	26	7	4			
	80+ 3.19	3,53	4.38	4,33	4.70	5,50	5.50	3,60		

AVERAGE SIG. MEIGHT = 1.56 FT AVERAGE HAVE PERIOD = 3.59 SEC*
VARIANCE OF SIG. MEIGHT = 1.26 FT SG VARIANCE OF WAVE PERIOD = 1.86 SEC SQ*
STANDARD DEVIATION OF MEIGHT = 1.12 FT STANDARD DEVIATION OF PERIOD = 1.36 SEC*

297 OBSERVATIONS BUMMARY FOR MAY 71 MAY 72 MAY 74 PERIOD SIG. HEIGHT (FT) (BECS) CUM. ROW TOT. AVG. * 1000 0.00 1000 .78 939 1.15 593 1.75 239 2.06 88 1.89 27 0.00 27 1.50 24 1.10 7 1.50 3 1.50 TOT.* 0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 10.0 - 10.9 TOTAL CUM. TOTAL COL. AVG. 2-3 1-2 61 347 354 152 61 165 111 61 27 145 104 20 17 37 94 34 7 27 10 414 323 1000 586 3,25* 3,45

AVERAGE SIG. HEIGHT = 1.54 FT AVERAGE HAVE PERIOD = 3.45 BEC*
VARIANCE OF SIG. HEIGHT = 1.16 FT SQ VARIANCE OF HAVE PERIOD = 1.75 SEC SQ*
STANDARD DEVIATION OF HEIGHT = 1.08 FT STANDARD DEVIATION OF PERIOD = 1.32 BEC*

RESULTS OBTAINED FROM 1024#SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT THIMBLE SMOALS CHANNEL.

318 0858	RVATION	8	5	UMMARY	FnR J	UN 71	JUN 72	JUN 7	3 JUN	74	
PERIOD				siG.	HEIGH	T (FT)					
(SECS)											
										CUM.	ROW
	0-1	1-2	2-3	3-4	4-5	9-6	6-7	7-8	TOT.	TOT.	AVG.
0.09										1000	0.00
1.0 - 1.9	79	19							97	1000	.69
2.0 - 2.9	185	182	9						374	903	1.04
3.0 - 3.9	85	123	28	6	3				245	528	1.36
4.0 - 4.9	75	60	19	9	3			3	170	583	1.44
5.0 - 5.9	50	25	3						79	113	.90
6.0 - 6.9	13	-							13	35	.50
7.0 - 7.9	6								6	55	.50
8.0 - 8.9	13								13	16	.50
9.0 - 9.9	3								3	3	.50
TOTAL	506	409	60	16	6			1			1.12
CUM. TOTAL	1000	494	85	25	6	3	3	1			
COL. AVG.	3.46.	3.23	3.76	4.10	4.00	0.00	0.00	4.50	3.40		

AVERAGE SIG. HEIGHT = 1.15 FT AVERAGE HAVE PERIOD = 3.40 SEC*
VARIANCE OF SIG. HEIGHT = .49 FT SG VARIANCE OF WAVE PERIOD = 1.77 SEC SG*
STANDARD DEVIATION OF MEIGHT = .70 FT STANDARD DEVIATION OF PERIOD = 1.33 SEC*

RESULTS OBTAINED FROM 1024-8ECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAYE GAGE LOCAPED AT THIMBLE SHOALS CHANNEL. * CALMS ARE OMITTED.

170 OMBERVATIONS

PENTOD (SECS)

0-1 1-2 2-3 3-4 TOT.* TOT.* AVG.*

100 0 - .9

1.0 - 1.9 125 23 148 1000 .65

2.0 - 2.9 108 267 17 392 852 1.27

3.0 - 3.9 91 68 51 17 227 460 1.48

4.0 - 4.9 40 68 51 17 227 460 1.48

4.0 - 4.9 40 68 6 114 233 1.20

5.0 - 5.9 45 40 85 119 .97

6.0 - 6.9 6 6 11 34 1.00

7.0 - 7.9 6 11 34 1.00

7.0 - 7.9 6 11 17 23 1.17

8.0 - 8.9 6 6 50

TOTAL 426 483 74 17

CUM. TOTAL 1000 574 91 17

COL. AVG. 3.13* 3.29 3.35 3.50 3.23

AVERAGE SIG. HEIGHT # 1.19 FT AVERAGE HAVE PERIOD # 3.21 SEC*
VARIANCE OF SIG. HEIGHT # .33 FT SQ VARIANCE OF WAVE PERIOD # 1.79 SEC SUPSTANDARD DEVIATION OF HEIGHT # .57 FT STANDARD DEVIATION OF PERIOD # 1.34 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT THIMBLE SHOALS CHANNEL.

* CALMS ARE OMITTED.

369 OBSE	RVATIONS	5	9	UMMARY	FOR A	UG 71	AUG 72	AUG 7	3 AUG 7
PERIOD				SIG.	HEIGH	7 (FT)			
(SECS)									
								CUM.	ROW
	0-1	1-2	2-3	3-4	4-5	5-6	TOT.*	TOT. *	AVG
0.09								1000	0.00
1.0 - 1.9	65	19					84	1000	.73
2.0 - 2.9	157	125	8				290	916	. 99
3.0 - 3.9	114	92	41	27	5		279	626	1.49
4.0 - 4.9	87	46	19	10			168	347	1.29
5.0 - 5.0	70	24	•	, ,	3	3	100	179	.99
6.0 - 6.9	14	5					19	79	.79
7.0 - 7.9	11						14	60	.70
8.0 - 8.9	14	ś					19	46	.79
9.0 - 9.9		5 5					11	27	1.00
10.0 -10.9	5 8	•					11	16	.75
11.0 -11.9	0	,					• •	5	0.00
12.0 -12.9	3						3	5	.50
13.0 -13.9								3	0.00
14.0 -14.9								3	0.00
15.0 -15.9								3	0.00
								3	0.00
16.0 -16.9								3	0.00
17.0 -17.9								3	0.00
18.0 -18.9								3	0.00
19.0 -19.9							3	i	
20.0 -20.9	3						,	,	
51.0 +		-							0.00
TOTAL	550	356	68	43	8	3			1.14
CUM. TOTAL	1000	450	155	54	11	3			
COL. AVG.	3.96*	3.62	3.66	3.88	4.17	5.50	3,83		

AVERAGE SIG. HEIGHT # 1.19 FT AVERAGE WAVE PERIOD # 3.79 SEC*

VARIANCE OF SIG. HEIGHT # .64 FT SO VARIANCE OF WAVE PERIOD # 3.84 SEC SQ*

STANDARD DEVIATION OF PERIOD # 1.96 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT THYMBLE SHOALS CHANNEL.

* CALMS ARE OMITTED.

i	264 0856	RVATION	•	8	UMMARY	FOR S	FP 71	SEP 72	8E . 1	3		
PER	RIOO				SIG.	HEIGH	T (FT)					
(\$	ECS)											
											CUM.	HO.
		0-1	1.5	5.7	3-4	4-5	506	6-7	7-8	TOT	101.	AVG.
0.0	9										1000	0.00
	1.9	30	15							45	1000	.83
	. 2.9	91	110	45						246	955	1.32
	. 3.9	53	98	91	45	4				292	708	1.98
	4.9	42	64	49	42	27	8	4	4	239		2.52
	5.9	5.3	42	4	4	27	4	4		91		2.15
6.0 .		19	19							38	87	1.00
	7.9		4							4	49	1.50
8.0 -											45	.50
9.0	9.9			4	4					11	38	2.17
10.0 .			8							8	27	1.50
11.0 .											19	0.00
12.0 .			4	4						15		1.25
13.0											4	0.00
14.0 .		4								4	4	
TOTAL		280	364	197	95	42	11	. 8	4		-	1.84
CUM. 1	TOTAL	1000	720	356	159	64	23	11	4			
COL.		4.08	3,96	3.85	4.26	4,68	4,83	5,00	4.50	4.05		

AVERAGE SIG. HEIGHT = 1.82 FT

VARIANCE OF SIG. HEIGHT = 1.42 FT SQ

STANDARD DEVIATION OF HEIGHT = 1.42 FT SQ

STANDARD DEVIATION OF HEIGHT = 1.49 FT

STANDARD DEVIATION OF PERIOD = 1.94 SECO

RESULTS DBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN HITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT THIMBLE SHOALS CHANNEL,

CALMS ARE OMITTED.

295 0886		•	•		, ,,	OCT 71 (•		
PERIOD				81G.	HEIGH	HT (FT)					
(SECS)											
										CUM.	RON
	0-1	1.2	2.3	3-4	4.5	5.6	6-7	7-8	TOT		AVG.
.09										1000	0.00
.0 - 1.9	24	17							41	1000	.92
.0 . 2.9	64	156	37		3				195	959	1.44
.0 . 3.9	41	81	108	51	14				295	698	15.5
.0 . 4.9	31	58	24	61	24	20	7		224	403	2.85
.0 . 5.9	34	37	7	3	7	27		,	155	180	2.72
.0 - 6.9	3	7	14						24	58	1.93
.0 - 7.9	3	3	3						10	34	1.50
.0 . 8.9	17	7							24	24	.79
TAL	217	366	193	115	47	47	7	7			2.11
M. TOTAL	1000	783	417	224	108	61	14	7			
L. AVG.	3,94*	3,53	3.78	4.09	4.21	5.07	4,50	5.50	3,86		
EHAGE SIG.	HETCHT					AVERAGE	MAVE	-		AT SEC	
RIANCE OF S				FT 80		VARIANCE					

AVERAGE SIG. HEIGHT # 2.10 FT AVERAGE HAVE PERIOD # 3.83 SEC VARIANCE OF SIG. HEIGHT # 1.93 FT SQ VARIANCE OF WAVE PERIOD # 1.87 SEC SQ*

STANDARD DEVIATION OF HEIGHT # 1.39 FT STANDARD DEVIATION OF PERIOD # 1.37 SEC*

SUMMARY FOR NOV 72 NOV 73 163 ORSERVATIONS SIG. HEIGHT (FT) PERTUD (SECS) CUM. ROW TOT. . AVG. . 707. AVG. 1000 0.00 1000 .50 938 .95 700 1.99 356 2.37 113 1.79 25 1.50 6 0.00 TOT.* 0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
9.0 - 9.9
10.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
TOTAL
CUM. TOTAL
COL. AVG. 0-1 18 61 129 55 43 43 1-2 2 - 3 63 238 344 244 88 13 104 117 55 18 123 31 31 98 153 350 313 1000 650 3.13* 3.66

AVERAGE SIG. HEIGHT # 1.72 FT AVERAGE WAVE PERIOD # 3.64 SEC*
VARIANCE OF SIG. HEIGHT # 1.20 FT SQ VARIANCE OF WAVE PERIOD # 1.90 SEC SQ*
STANDARD DEVIATION OF PERIOD # 1.36 SEC*

RESULTS OBTAINED FROM 1024-BECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT THIMBLE SHOALS CHANNEL.

CALMS ARE OMITTED.

157 OBSER	VATION		3	UMMARY	FOR C	EC 71	DEC 7	?			
PERIOD				81G.	HEIGH	(T (FT)					
(SECS)											
									CUM.	ROW	
	0-1	1-5	5.2	3-4	4=5	3-6	6-7	101.		AVG.	
0.09	6									0.00	
1.0 - 1.9	35	6						38		. 67	
2.0 - 2.9	127	159	57					346	965	1.30	
3.0 - 3.9	121	64	64	35	6		6	295	615	1.70	
4.0 - 4.9	37	35	38	25	36		6	199	321	2.40	
5.0 - 5.9	25	25	6	6		13		83		2.27	
6.0 - 6.9	13	• •			-	•		13		.50	
7.0 . 7.9	• •									0.00	
8.0 - 8.9	13	6									
								19		.83	
9.0 . 9.9										0.00	
10.0 -10.9	6							6	6	.50	
TOTAL	401	293	166	64	51	13	13			1.66	
CUM. TOTAL	1000	599	306	140	76	25	13				
COL. AVG.	3,660		3,46	4,10	4,50	5,50	4,00	3.62			
AVERAGE SIG. H	EIGHT .	1.6	9 FT			VERAGE	WAVE	PERIOD	. 3,	32 SEC+	

AVERAGE SIG. HEIGHT = 1.69 FT AVERAGE WAVE PERIOD = 3.92 SEC*
VARIANCE OF SIG. HEIGHT = 1.59 FT SG VARIANCE OF HAVE PERIOD = 1.83 SEC SG*
STANDARD DEVIATION OF PERIOD = 1.33 SEC*

THE RESERVE TO SHEET AND THE PARTY OF THE PA

PERIOD (SECS)				SIG.	HEIGH	T (FT)						
											CUM.	ROM
	0-1	1-2	2-3	3-4	4-5	4-6	6-7	7-8	8-9	TOT.*	TOT	
0.09	3									-		0.00
1.0 - 1.9	48	14								62	1000	
2.0 - 2.9	118	152	25							546		1.19
3.0 - 3.9	8.5	104	74	33	8					303		1.76
4.0 - 4.9	54	55	35	30	55	5	2	1		501		2.20
5.0 - 5.9	36	25	4	5	5	7	3	1		86		2.0
6.0 - 6.9	7	u	5							14		1.45
7.0 - 7.9	9	4								8		1.00
8.0 - 8.9	9	4								13		. 82
9.0 - 9.9	5	5	1							5		1.36
0.0 -10.9	5	1								3		
1.0 -11.9												0.00
2.0 -12.9	3	5	1							5		
3.0 -13.9												0.00
4.0 -14.9	1									5		5.00
5.0 -15.9											1	0.00
6.0 -16.9											1	.50
OTAL	368	366	140	70	36	15	5	5	1			1.6
UM. TOTAL	1000	635	266	126	56	50		3	1			
OL. AVG.	3.68*	3.52	3.79	4.16	4.47	5.06	5.09	5.17	6.00	3.73		
VERAGE SIG.	none account						_	PERIOD	1000			

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAVE GAGE LOCATED AT THIMBLE SHOALS CHANNEL.

* CALMS ARE OMITTED.


Table A-12. CERC wave gage history for 15th Street Fishing Pier, Virginia Beach, Virginia.

		-	6.0	-	0	0		
CERC Form 174-74 18 Mar 74	74							
COORDINATES: 36°51' N., 75°58' W.	51' N., 75°58'	W.	LOCATION: 1	15th Stree	LOCATION: 15th Street Fishing Pier, Virginia Beach, Virginia	Virginia Bea	ch, Virginia	
Type of Gage	Beginning of Proper Operation	End of Proper Operation	Explanation	Gage Length (feet)	Gage Range (ft MSL)	Water Depth (ft MSL)	Distance from seaward end of pier	Pier Length (feet)
Step-resistance (SR), staff-parallel type	13 Oct. 1962	26 Nov. 1962	Step-resistance (SR), 13 Oct. 1962 26 Nov. 1962 Gage and part of pier destroyed staff-parallel type.	25		18	60 ft (on north side of pier)	800
SR staff-relay type	2 Mar. 1963	17 Jan. 1965	2 Mar. 1963 17 Jan. 1965 Gage and part of pier destroyed by storm.	25		18	60 ft (on north side of pier)	800
SR staff-relay type	29 Nov. 1965	20 Sept. 1966	29 Nov. 1965 20 Sept. 1966 Gage temporarily removed during pier repair.	25		20	12 ft (on north side of pier)	006
SR staff-relay type	3 Nov. 1966	31 Mar. 1970	3 Nov. 1966 31 Mar. 1970 Recorder house vandalized.	25		20	12 ft (on north side of pier)	006
	22 Apr. 1970	26 Mar. 1971	22 Apr. 1970 26 Mar. 1971 Gage destroyed by storm; not replaced.					

Table A-13. Number of analyzed records from Virginia Beach, Virginia. 1

YR YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1962										71	50		121
1963			43	52	16	131	26	72	104	137	159	178	918
1964	186	163	182	174	30	83	143	102	51	152	179	158	1603
1965	85										3	119	207
1966	177	155	148	170	166	180	125	174	101		167	186	1749
1967	173	150	88	100	105	180	183	172	180	148	180	143	1802
1968	186	163	175	128	145	80						118	995
1969	111	107	101	85	84	56	121	121	104	59			949


¹Results before November 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the second BEB method for 1962 to March 1964 and analyzed by the CERC method for April 1964 to June 1968. Results after November 1968 obtained from 1,024-second digital records taken four times daily.

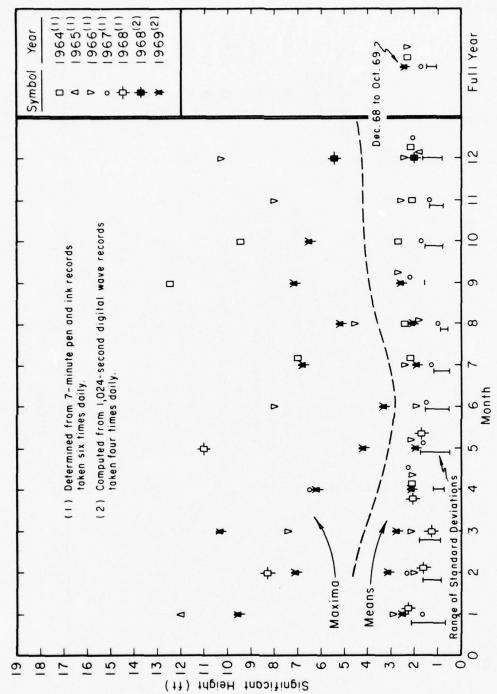

-


THE RESERVE THE PARTY OF THE PA

Figure A-23. Maxima, means, and standard deviations of significant height from Virginia Beach, Virginia.

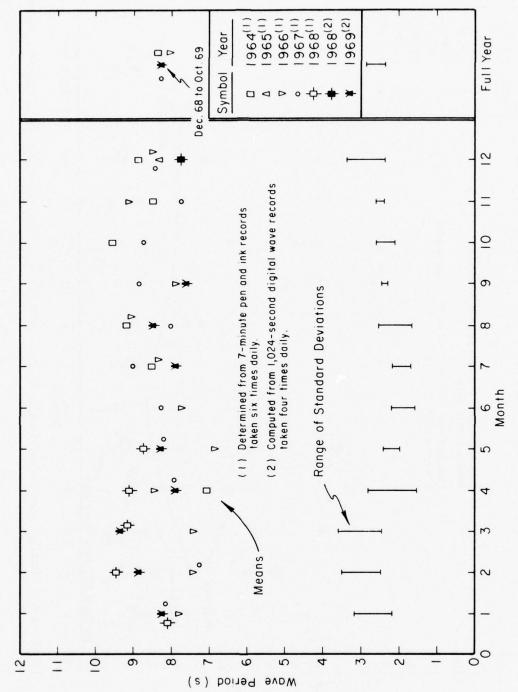

"


Means and standard deviations of wave periods for Virginia Beach, Virginia. Figure A-24.

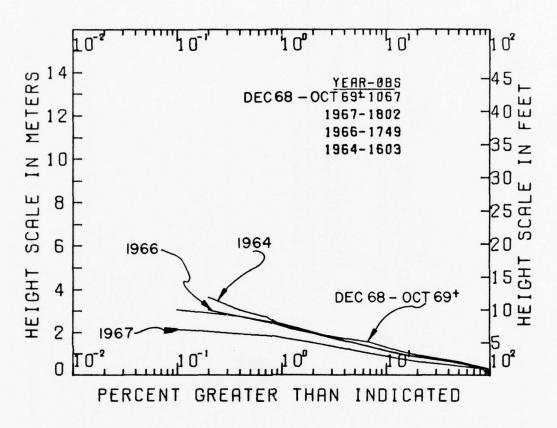

NOTE:

- = computed from 1,024-second digital wave records taken four times daily.
- Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-25. Annual cumulative significant height distributions from Virginia Beach, Virginia.

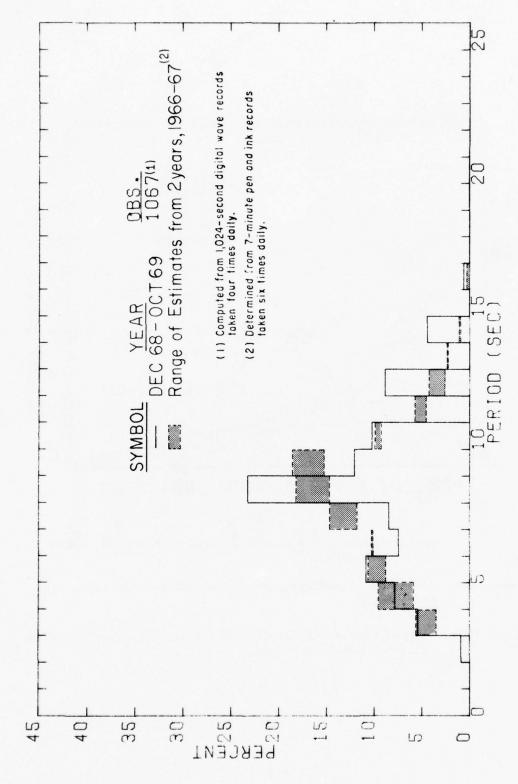

1,

Figure A-26. Annual significant period distributions from Virginia Beach, Virginia.

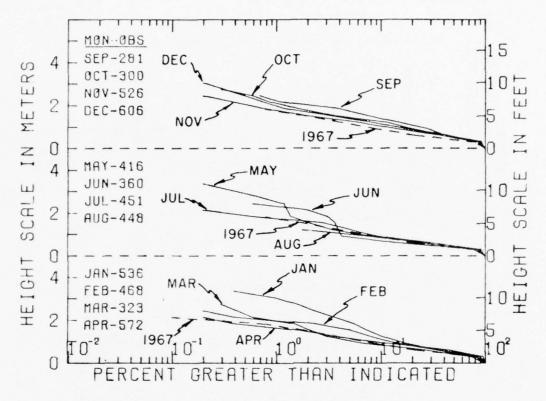


Figure A-27. Seasonal summaries of cumulative significant height distributions from Virginia Beach, Virginia; determined from 7-minute pen and ink records taken six times daily.

Table A-14. Wave Climate for Virginia Beach, Virginia. Distribution of significant height versus period (in observations per 1,000 observations).

PER100 (85C3)				HE 18	HT (FT)									
														cun.	HO.
	0-1	1-2	2-3	3-4	4-5	5+4	4=7	7 . 6	8-9	4+10	10-11	11-12	101.4	101.	
.0 . 1.4														1000	
2.0 . 2.4	-													1000	
2.5 - 2.9														1000	
3.0 . 3.4		1.1											1.7		1.17
3.5 - 1.9		24											30		1,69
4.0 - 4.4	4	49	37										99		5.02
5.0 . 5.9	2	54	50	5.5	11	4							145		2.45
		54	3.7	4	7	2	4	5					116		5.35
7.0 . 7.4	11	56	6			•	2		•	,			108		2,97
8.0 . 8.9	26	6.5		7	2	•	5	5	2		2		110		2.19
4.0 - 4.4	35	8 0			5						- 4		146		1.61
0.0 -10.4	•	52	7	2	2			5					.,		1,64
1.0 -11.0	4	45	1							2			64		2.59
2.0 -12.9	2	5.5	•				4		5				47		2,70
3.0 -13.4	2	15	7			2							34		2,44
4.0 -14.4		7	5	4									13	13	2.21
TOTAL	100	535	179	69	35	19	1 0	13	,						2.25
UM. TOTAL	1000	892	350	177	108	73	54	35	5.5	15					
DL. AVG.	8.59*	8.19	0	7.46	7.87	8,00	8.80	8.50	9.00	4.17	4,03	10,50	8.08		
VERAGE SIG.	HEIGHT	. 2.2	5 FT			VERAGE	HAVE	PERIOD	. 8.	02 BE					
MARIANCE OF S	IG. HEI	GHT B		FT 30		ARIANC	F OF W	AVE PE	8100 .		59 SEC				
TANDARD DEVI		C METE	WT .		7 .	TANDAR	O DEVI	MOITA	OF PER	100 .	2.72	82.04			

. CALMS ARE OMITTED.

468 OBSERVATIONS	SUMMARY	FOR FEB 66	EB 67 FEB 68		
PERIOD (SECS)	HEIG	HT (FT)			
					CUM. ROW
0-1 1-2	2-3 3-4	4.5 5.6	6.7 7.8 8	-9 101.4	TOT AVG
.0 - 1.9 83					1000 .00
2.0 - 2.4					1000 .00
2.9 . 2.9					1000 .00
3.0 - 3.4 9 15				26	1000 1.14
3.5 - 3.9 13 26	4			47	974 1.30
4.0 = 4.9 9 53	34 11	2 2		121	90.5 859
5.0 = 5.9 6 43	36 15	4 4	2	121	807 2.40
6.0 = 6.9 4 51	26 13	6 4	2 2	119	685 2.46
7.0 - 7.9 6 32	51 6	11 4 2 4 2 4	2	91	566 2.55
8.0 - 8.9 15 43	4 5	5 5	5	7.7	476 1.77
9.0 - 9.9 17 62	24 6	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		126	399 1.85
10.0 -10.9 11 45	19 4	2 4	4 2	100	273 2.31
11.0 -11.9 9 49	17	2	2	86	172 1.82
12.0 -12.9 6 21	9 5		2	44	59.1 68
13.0 -13.9 2 11		2		26	45 5.35
		2		14	16 2.00
15.0 -15.9				5 5	2 8.50
TOTAL 192 459	199 64	34 28	19 2	2	1.97
CUM. TOTAL 1000 808	348 150	85 51	24 4	2	
COL. AVG. 7.94# 8.09	7.65 7.33	7.62 8.50	8.83 10.50 15.	50 7.96	
AVERAGE SIG. HEIGHT # 1.9	7 FT	AVERAGE	WAVE PERIOD .	7.96 SEC	
VARIANCE OF SIG. HEIGHT &	1.84 FT 50	VARIANC	E OF WAVE PERTO		3 SEC SQ#
STANDARD DEVIATION OF HEIGH	HT # 1.36 F	T STANDAR	DEVIATION OF	PERIOD .	2.89 SEC#

SUMMARY FOR MAR 56 MAR 58 322 ORSERVATIONS PERIOD HEIGHT (FT) (SECS) CUP. ROA TOT.= 4VG.= 1000 .00 1000 .50 996 1.00 982 1.00 983 1.00 846 1.96 750 1.86 750 1.86 274 1.55 140 1.86 56 1.39 25 .63 14 1.50 11 1.17 1.03 1-2 2-3 3-4 4-5 0-7 7 - 8 5-6 115 2.0 - 1.9
2.0 - 2.4
2.5 - 2.9
3.0 - 3.4
3.5 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
6.0 - 8.9
10.0 - 10.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 15.9
TOTAL
CUM. TOTAL
CUM. TOTAL 149 88 91 66 91 116 186 133 84 32 19 37 28 34 47 50 99 78 47 1 6 3 7 4 0 16 3 3 5 6 16 37 16 3 22 3 11 3 264 1000 #.60* 472 736 11 37 68 6.42 1.63

AVERAGE SIG. HEIGHT = 1.63 FT

VARIANCE OF SIG. HEIGHT = 1.15 FT SG

STANDARD DEVIATION OF HEIGHT = 1.07 FT

AVERAGE HAVE PERIOD = 8.26 SEC*

VARIANCE UP NAVE PERIOD = 7.13 SEC SG*

STANDARD DEVIATION UP PERIOD = 2.67 SEC*

RESULTS OBTAINED FROM THEIRITE PEN AND THE RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT 15TH STREET PIER

CALMS AGE OMITTED.

571 Op5EF	PVATIONS	5	5	CHAMA	FOR A	PR 64	4 P R 66	APR 67	APR 68	
PERIOD (SECS)				⊢E I G	HT (FT)				
									CUM.	RO.
	0-1	1 = 2	2 = 3	3-4	4-5	5-0	6 - 7	101.*	101,*	AVG . #
.0 - 1.9	4								1000	.00
2.0 - 2.4									1000	.00
2.5 - 2.9									1000	.00
3.0 - 3.4	5	18	2					21	1000	1.50
3,5 . 3,0	2	16						51		1.58
4.0 - 4.9	2	25	51	14	2 2			58	958	2.29
5.0 - 5.9		33	72	1.4	5	2 5		123	900	2.41
6.0 - 6.9	4	67	37	1.8	5	5		132	777	2.22
7.0 - 7.9		53	37	1.1	11			121	645	2.24
8.0 . 8.9	16	93	63	9	2			163		1.88
9.0 - 0.0	1.1	74	28	9	ш			125		1.87
10.0 -10.9	2	58	37	2				98	216	1.89
11.0 -11.9	5 5	28	14	2 11 2			5	56	118	2.25
12.0 -12.9	2	51	12	2		5		39		2.05
13.0 -13.9		9	5			5 5		10		2.28
14.0 -14.9			4	2		2		7	7	3.50
TOTAL	44	503	335	81	25	12	2		,	2.08
CUM. TOTAL	1000	956	454	119	39	14	5			
COL. AVG.	8.37*	8.18	7.91	7.91	7.00		11.50	8.07		

AVERAGE SIG. MEIGHT # 2.08 FT AVERAGE HAVE PERIOD # 8.07 SEC*

VARIANCE OF SIG. MEIGHT # .82 FT SO VARIANCE OF HAVE PERIOD # 5.85 SEC SQ*

STANDARD DEVIATION OF MEIGHT # .91 FT STANDARD DEVIATION OF PERIOD # 2.42 SEC*

RESULTS DRIAINED FROM 7-MINUTE DEN AND INK DECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LUCATED AT 15TH STPFET PIER

CALMS ARE OMITTED.

CONTRACTOR TO STATE OF THE STAT

PERIOD				HEIG	HT (FT)									
(SECS)															
														CUM.	ROM
	0-1	1.5	2 . 3	3-4	4.5	5-6	6-7	7-8	8-9	9-10	10-11	11-12	101.	101.	AVG.
.0 . 1.9	46													1000	.00
.0 - 2.4														1000	.00
.5 . 2.9		5											3		1.50
.0 . 3.4		7											8		1.50
.5 . 3,9	5	38	7										50		1.60
.0 - 4.9	2	48	29	5	2	5							93		5.00
.0 - 5.9	2	31	38	12		2							91		2.31
.0 . 6.9	5	70	10	10	7	5			5				108		5.55
.0 . 7.9	19	89	41	5									161		1.70
.0 . 8.9	14	111	31	2			2						169		1.71
.0 - 9.9	17	91	26	2	5				5			5			1.9
.0 -10.9	14	46	24	12	2					5			108		5.5.
.0 -11.9	10	10	5	5									58		1.5
.0 -12.9	2	7	2										13		1.5
.0 -13.9		7											8		1.5
.0 -14.9	2												3	10	
.0 -15.9	5												5		
.0 -16.9	2												3	3	.51
TAL	142	558	214	50	14	7	5		5	5		5			1.65
M. TOTAL	1000	858	300	87	36	5.5	14	.00	12	7	.00	5			
L. AVG.	9.53*	7.65	7.44	7.60	7.33	5.50	8.50	.00	8.00	10.50	.00	9.50	7,79		
														•	
ERAGE SIG.	HEIGHT	= 1.8			4	VERAGE	MAVE !	PERIOD	· 7.						
RIANCE OF S				F1 50			D DEVI				55 SEC				

RESULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAVE GAGE LOCATED AT 15TH STREET PIER

CALMS ARE OMITTED.

360 OBSE	RVATION	5		UMMARY	FOR .	1UN 66	JUN 6	7				
PERIOD (SECS)				HE I G	HT (F1)						
											CUM.	HO.
	0-1	1 - 5	5-3	3-4	4-5	5.6	6-7	7-8	8-9	TOT. *	101.	AVG.
.0 . 1.9											1000	.00
2.0 - 2.4											1000	.00
2.5 - 2.9											1000	.00
3.0 - 3.4		6								14	1000	.90
3,5 - 3,9		16	3							39	986	1.57
4.0 - 4.9		2.8	6							33	947	1.67
5.0 - 5.9		28	19							53	914	1.76
6.0 . 6.9		64	11			3	6	6	3	92	861	2.62
7.0 . 7.9	25	167	2.5	6			6	6		233		1.87
8.0 - A.9	19	183	17			3			3	225		1.62
9.0 . 9.9	14	214	17						-	244		1.51
10.0 -10.9	6	28								33		1.33
11.0 -11.9	3	8								11		1.25
12.0 -12.9	3	3										1.00
13.0 -13.9		6	3									1.83
14.0 -14.9		8										1.50
TOTAL	83	776	97	6		6	11	14	6		·	1.72
CUM. TOTAL	1000	917	139	42	36	36	31	19				
COL. AVG.	8.01*		7.39	7.50	.00	7.50	7.00	7.10	7.50	7,99		
AVERAGE SIG.	EIGHT	. 1.7	2 . 7			VERAGE	WAVE	PERIOD	. 7.0			

AVERAGE SIG. HEIGHT = 1.72 PT AVERAGE NAVE PERIOD = 7.99 SECTION OF SIG. HEIGHT = 1.29 FT SQ VARIANCE OF MAVE PERIOD = 3.69 SECTION OF PERIOD = 1.92 SECTION OF PERIOD = 1.

451 OBSERVATIONS SUMMARY FOR JUL 64 JUL 66 JUL 67
PERIOD HEIGHT (FT)

(SECS)

1

*

CUM. HOW ...
101. AVG...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 ...
1000 101.0 1 -2 0 - 1.0 2.0 - 2.4 2.5 - 2.4 3.0 - 3.4 3.5 - 3.0 4.0 - 4.9 5.0 - 5.0 6.0 - 6.7 7.0 - 7.7 8.0 - 8.9 9.0 - 9.0 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 15.0 - 15.0 15.0 - 16.9 TOTAL CUM. TOTAL CUM. TOTAL 11 20 40 67 151 295 257 89 16 13 15 20 73 197 182 62 11 11 7 7 4 11 2 16 40 33 11 2 4 2 2 2 9 5 605 887 8,91 2 113 1000 9.25 585 585 05.8 42 95 7.61 7.50

AVERAGE SIG. HEIGHT # 1.85 FT AVERAGE HAVE PERIOD # 8.69 SEC*
VARIANCE OF SIG. HEIGHT # 1.11 FT SQ VARIANCE OF MAVE PERIOD # 3.61 SEC 80*
STANDARD DEVIATION OF HEIGHT # 1.05 FT STANDARD DEVIATION OF PERIOD # 1.90 SEC*

RESULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAVE GAGE LOCATED AT 15TH STREET PIFR

CALMS ARE OMITTED.

448 083	ERVATION	5	3	UMMARY	FOR A	UG 64 /	AUG 66 A	UG 67
PERIOD				HE 10	SHT (FT)		
(SFCS)								
							CUM.	HO-
	0-1	1-2	2 . 3	3-4	4-5	101.	TOT	AVG
.0 - 1.9	16						1000	.00
2.0 . 2.4							1000	.00
2.5 . 2.9							1000	.00
3.0 - 5.4		4	2			7	1000	1.83
3,5 - 3,9						5	993	
4.0 . 4.9	5	11	9	7		5.9	989	2.19
5.0 . 5.9	5	5.5	13	9	5	51	959	
6.0 - 6.9	25	5.8	15	7		104	902	1.52
7.0 - 7.9	54	83	11	11		161	798	1.37
8.0 - 8.9	67	129	21	4	2	234	637	1.39
9.0 - 9.9	18	107	35			161	404	
10.0 -10.9	1.6	42	31	11	5	107	543	1.90
11.0 -11.9	7	20	22	2	5	54		2.00
0.51- 0.51	ü	11	7	5	9	34		2.50
13.0 -13.9	4	11	2	4		23	48	1.80
14.0 -14.9	2	16	4	2		25	25	1.77
TOTAL	225	516	181	60	18			1.63
CUM. TOTAL	1000	775	259	78	18			
COL. AVG.	8.450	8.72	8.95	8.43	10.75	8.72		

AVERAGE SIG. HEIGHT # 1.63 FT AVERAGE WAVE PERIOD # 8.72 SEC*

VARIANCE OF SIG. HEIGHT # .79 FT SQ VARIANCE OF MAVE PERIOD # 4.69 SEC SQ*

STANDARD DEVIATION OF HEIGHT # .89 FT STANDARD DEVIATION OF PERIOD # 2.21 SEC*

281 085	ERVATION	8		UMMARY	FOR S	EP 66	SEP 6	7				
PERIOD				HEIG	HT (F1)						
(SECS)												
											CUM.	ROH
	0-1	1-2	2-3	3-4	4.5	5-6	6-7	7.8	8-9	101.		AVG.
.0 - 1.9	11	4								4		1.50
2.0 - 2.4											996	.00
2.5 . 2.9											996	.00
3.0 - 3.4	4	11	7							55	996	1.67
3.5 - 5.9		11	7							14	975	2.00
4.0 . 4.9		28	1 1	7	4					50	960	15.5
5.0 - 5.9		36	14	25	11	4				90	910	2.74
6.0 - 6.9	4	21	7	15	18	11	7			90	820	3.50
7.0 - 7.9		28	21	18	14	14	14	4	4	119	730	3.83
8.0 - 8.9	11	96	18	25	11	4			4	169	612	2.27
9.0 - 9.9	25	125	7	14	4	4	4			183	442	1.79
10.0 -10.9	18	68	11	4						101	259	1.50
11.0 -11.9	18	36	14	14	7					90	158	2.02
12.0 -12.9	4	18		7	4		4			36		2.60
13.0 -13.9	11	11	11							35	35	1.50
TOTAL	105	488	128	135	71	36	28	4	7			2.36
CUM. TOTAL	1000	897	409	281	146	75	39	11	7			
COL. AVG.	10.18*	8.67	7.97	7.97	7.70	7.30	8.13	7.50	8.00	8,48		
AVERAGE SIG.	HE I GHT	2.3	6 FT			VERAGE	WAVE	PERIOD	. 8.	51 SEC.		

AVERAGE BIG. HEIGHT = 2.36 FT AVERAGE WAVE PERIOD = 5.51 SEC VARIANCE OF SIG. HEIGHT = 2.42 FT SG VARIANCE OF WAVE PERIOD = 5.61 SEC 800 STANDARD DEVIATION OF HEIGHT = 1.56 FT STANDARD DEVIATION OF PERIOD = 2.41 SEC

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT 15TH STREET PIER CALMS ARE OMITTED.

PERIOD				HEIG	HT (FT	,							
(SFCS)													
												CUM.	RO.
	0-1	1.5	5.2	3-4	4-5	5.6	507	7 = 8	8-9	9-10	101.4	101.4	AVG.
.0 - 1.9	3											1000	.00
5.0 . 5.4												1000	.00
5.5 - 5.9												1000	.00
5.0 - 3.4		3									3	1000	1.50
3.5 - 3.9												997	.00
4.0 - 4.0		7	7								13		2.00
5.0 - 5.9		53	27	10	7						67		2.50
6.0 - 6.9		27	37	30	30	10					134		3.20
7.0 - 7.9		67	53	10	7	3		3		3	117		2.56
8.0 . 8.9	10	87	43	3	10	3	5				161		5.15
9.0 - 9.9	50	100	50	10	7						167		1.68
0.0 -10.9	7	43	50	7	13		3				114	338	2.24
1.0 -11.9	17	50	13	3	3				3		90		1.91
5.0 -15.9	7	37	17	7		3					70		5.05
3.0 -13.9		15	7	3							53	64	2.07
4.0 -14.9	3	30	3								37		1.50
5.0 -15.9		3									3	3	1.50
OTAL	77	510	217	83	77	50	7	3	3	3			5.55
UM. TOTAL	1000	452	413	197	113	37	17	10	7	3			
OL. AVG.	10.41*	9.60	8,58	8.22	7.93	A.00	9.50	7.50	11.50	7.50	9.15		
VERAGE SIG.						VERAGE							

526 ORSE	RVATION	8	8	UMMARY	FOR N	OV 64 1	NOV 66	NOV 67				
PERIOD				HEIG	HT (FT	,						
(5503)						•						
											CUM.	PO-
	0-1	1-2	5.3	3-4	4-5	500	6-7	7-8	8-9	TOT . *	101.	AVG
.0 - 1.9	17										1000	.00
2.0 - 2.4											1000	.00
2.5 - 2.9											1000	.00
3.0 - 3.4	4	8								6	1000	.83
3.5 - 3.9	5	8	5							12	994	
4.0 - 4.9	10	36	51	11		2				81	983	5.05
5.0 - 5.9	13	38	30	34	4					122	901	2.31
6.0 - 6.9	11	40	23	11	13	10	2			112	779	2.60
7.0 - 7.9	8	32	35	10	6		4		5	95	667	2.50
8.0 - A.9	17	67	27		6					118	573	1.73
9.0 - 9.9	35	99	30		5					166	455	1.52
10.0 -10.9	17	72	30	2	4					128	288	1.73
11.0 -11.9		55	19	4	4					83	161	1.97
12.0 -12.9	4	25	13	2						44	77	1.60
13.0 -13.9		6	5	5	4					14	33	2.79
14.0 -14.9	2	13	5							19	19	1.70
TOTAL	137	497	535	7.6	42	11	6		5			1.96
CUM. TOTAL	1000	863	371	130	61	19	8	5	5			
COL. AVG.	6.13*	8.90	8.33	6.74	8.41	6.17	7.17	.00	7.50	4.44		
AVERAGE SIG.	HE IGHT	1.9	6 FT			VERAGE	HAVE	PERIOD	. 8.	44 SEC		

AVERAGE SIG. HEIGHT = 1.96 FT AVERAGE HAVE PERIOD = 8.44 SEC VARIANCE OF RIG. HEIGHT = 1.25 FT SQ VARIANCE OF WAVE PERIOD = 6.53 SEC SQ STANDARD DEVIATION OF HEIGHT = 1.12 FT STANDARD DEVIATION OF PERIOD = 2.56 SEC

RESULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN HITH A STEP RESISTANCE RELAY MAVE GAGE LOCATED AT 15TH STREET PIER CALMS ARE OMITTED.

606 085E	RVATION	s	5	UMMARY	FOR D	EC 64	UEC 65	DEC 6	6 DEC 6	7				
(SECS)				HEIG	HT (FT)								
	0-1	1-2	2.3	3-4	4-5	5=6	6.7	7.8	8=9	9-10	10-11	101.	CUM.	RDH AVG
2.0 - 1.9	5			5								5	1000	3.50
2.5 . 2.0													998	.00
3.0 . 3.4	5	13										15	998	1.39
3.5 - 3.9	3	21										31		1.61
5.0 - 5.9	;	18	13	30	15 15 3							48		5.33
6.0 - 6.9	8	36	28	17	15	;	3					117		2.74
7.0 - 7.9	12	26	53		.,		,		2			114		2.75
8.0 - 8.9	10	58	25	ě	5	ŝ	2				2	78		2.31
9.0 . 9.9	26	101	40	10		,	5		5			182		2.17
0.0 -10.9	18	69	26	7	3	-	_		•			154		1.83
11.0 -11.9	13	46	20	3	-							83		1.66
12.0 -12.9	5	28	18	3								51		1.95
13.0 -13.9		13	10	3	5							28		2.26
4.0 -14.9	5	5	13									17		2.20
15.0 -15.9												•		.00
6.0 -16.9					- 5							2		4.50
TOTAL	109	465	251	94	50	20	. 7	-	3		5			2.11
DL. AVG.	1000	8.77	426	175	81	31	12	5						
	0.75	0.11	8,92	7.51	6,83	7.00	7.75	.00	8,50	.00	8,50	8,55		
VERAGE SIG.	HETGHT	. 2.1	3 FT			VERAGE		PERIOD		56 SE				
ARIANCE OF	IG. HEI	GHT E		FT 50				AVE PER		7-1	3 SEC	SQ.		
STANDARD DEV								ATION (

5265 CASERVATIONS SUMMIRY FOR 34 MONTHS APR 64 THROUGH MAY 68 PERIOD HEIGHT (FT) (SECS) TOT... AYG...
1000 2.50
1000 3.50
1000 5.50
999 1.34
956 1.60
991 2.11
898 2.39
801 2.24
509 1.83
407 1.70
235 1.84
134 1.96
72 2.06
36 2.07
1 2.17
1.98 C-1 1-2 2-3 3-4 4-5 5-6 0-7 7-8 8-9 9-10 10-11 11-12 TOT.4 2.0 = 1.4 2.0 = 2.8 2.5 = 2.9 3.0 = 3.4 3.5 = 3.9 4.0 = 4.0 5.0 = 5.9 7.0 = 7.9 6.0 = 6.9 7.0 = 7.9 6.0 = 10.9 11.0 = 11.9 12.0 = 12.9 13.0 = 13.0 14.0 = 14.0 15.0 = 15.0 16.0 = 15.0 13 26 63 97 108 124 162 172 100 62 36 20 29 33 47 61 95 108 57 34 18 20 34 23 25 27 25 20 13 8 4 16 12 6 5 5 4 3 2 1 13 22 24 12 7 1 TOTAL
COL. AVG. 13: 528 10:3 870 8.71* 8.49 342 AVERAGE SIG. MEIGHT # 1.97 FT VARIANCE OF SID. MEIGHT # 1.50 FT 3Q STANDARD DEVIATION OF MEIGHT # 1.24 FT AVERAGE WAVE PERIOD # 8.32 SECT VARIANCE OF MAVE PERIOD # 6:18 SEC SQC STANDARD DEVIATION OF PERIOD # 2.49 SECT

RESULTS OBTAINED FROM T-MINUTE PEN AND THE RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GADE COCATED AT 15TH STREET PIER # CALHS ARE OMITTED.

1067 OBSERVATIONS SUMMARY FOR 11 MONTHS DEC 68 THROUGH OCT 69 PERIOD SIG. HEIGHT (FT) (SECS) 0-1 1 - 2 2.3 3.4 4.5 5.6 6.7 7.8

CUM. ROW TOT, A AVG. 1000 0.00 1000 0.00 1000 1.70 991 1.97 936 2.48 677 2.54 592 2.10 360 2.14 240 2.38 138 0.00 138 2.43 50 0.00 6 1.85 2.41 0.0 - ... 1.0 - 1... 2.0 - 2... 3.0 - 3... 4.0 - 4... 5.0 - 5... 6.0 - 6... 7.0 - 7... 8.0 - 8... 9.0 - 9... 11.0 - 11... 12.0 - 12... 13.0 - 13... 14.0 - 44... 15.0 - 15... 16.0 - 16... 16.0 - 16... 16.0 - 16... 17.0 - 17... 16.0 - 16 8-9 9-10 10-11 TOT.* 28 23 28 54 78 108 74 84 19 33 43 25 21 62 31 15 26 5 15 133 535 2 102 40 37 17 12 5 88 1 11 51 440 1000 949 9,61* 8,33 246 509 7.82

AVERAGE SIG. HEIGHT = 2.38 FT VARIANCE OF SIG. HEIGHT = 1.90 FT SG STANDARD DEVIATION OF HEIGHT = 1.38 FT AVERAGE MAVE PERIOD = 8.32 SEC*
VARIANCE OF MAVE PERIOD = 7.92 SEC SG*
STANDARD DEVIATION OF PERIOD = 2.81 SEC

RESULTS OBTAINED FROM 1024-8ECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT 15TH STREET PIFR.

* CALMS ARE OMITTED.

Table 15. Regression equations used to compensate significant height statistics for Virginia Beach, Virginia.

Compensation equations (ft)
$H_{NEW} = 0.23 + 0.76 H_{OLD}$
No compensation

NOTE:

 ${
m H}_{NEW}$ = estimate of significant height that would have been obtained by the CERC method of pen and ink record analysis (based on reanalysis of 2 months of data from Atlantic City, New Jersey).

 $H_{\it OLD}$ = significant height obtained by old method of pen and ink record analysis.


Table A-16. CERC wave gage history for Jennettes Fishing Pier, Nags Head, North Carolina.

		Pier Length (feet)	750						750					
	orth Carolina	Distance from seaward end of pier	153 ft (on north side of pier)						153 ft (on north side of pier)					
	igs Head, No	Water Depth (ft MSL)	17						17	16				
	LOCATION: Jennettes Fishing Pier, Nags Head, North Carolina	Gage Range (ft MSL)	-7 to +18						-8 to +17					
	Jennettes	Gage Length (feet)	25						25					
	LOCATION:	Explanation	9 July 1964 Recorder struck by lightning.	21 July 1964 28 May 1965 Gage struck by lightning.	13 June 1965 29 July 1966 Gage struck by lightning.	9 Aug. 1966 1 July 1971 Gage struck by lightning.	6 July 1972 Electronic trouble.	7 Aug. 1972 31 Oct. 1972 New gage installed.	3 Nov. 1972 29 May 1973 Pier damaged by storm.	15 Mar. 1974 10 May 1974 Gage struck by lightning.	13 June 1974 23 June 1974 Gage struck by lightning.	27 Aug. 1974 17 Oct. 1974 Gage struck by lightning.	Still operative as of 1 Feb. 1975	
	٠.	End of Proper Operation	9 July 1964	28 May 1965	29 July 1966	1 July 1971		31 Oct. 1972	29 May 1973	10 May 1974	23 June 1974	17 Oct. 1974		
4.	55' N., 75°36' V	Beginning of Proper Operation	8 Oct. 1963	21 July 1964	13 June 1965	9 Aug. 1966	28 Aug. 1971	7 Aug. 1972		15 Mar. 1974	13 June 1974	27 Aug. 1974	14 Nov. 1974	
CERC Form 174-74 18 Mar 74	COORDINATES: 35°55' N., 75°36' W.	Type of Gage	Step-resistance, staff-relay type						Continuous-wire staff					


Table A-17. Number of analyzed records from Nags Head, North Carolina. 1

										4-14-2			
YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NØV	DEC	тот
1964							102	127	83	171	161	177	821
1965	171	137	148	179	160	86	126	73	133	181	64	42	1500
1966	150	167	177	176	93	129	168	128	178	120	146	152	1784
1967	136	81	54	108	105	144	171	68					867
1968												96	96
1969	112	103	106	90	85	48	112	94	105	55			910
1970													
1971			40	111	105	91	22		117	117	78	120	802
1972	82	116	123	110	120	101		88	106	109	96	97	1148
1973	97	92	114	54	89								446
1974			43	73	32	22			75	50	54	118	467
1975	93												

¹Results before November 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the CERC method. Results after November 1968 obtained from 1,024-second digital records taken four times daily.

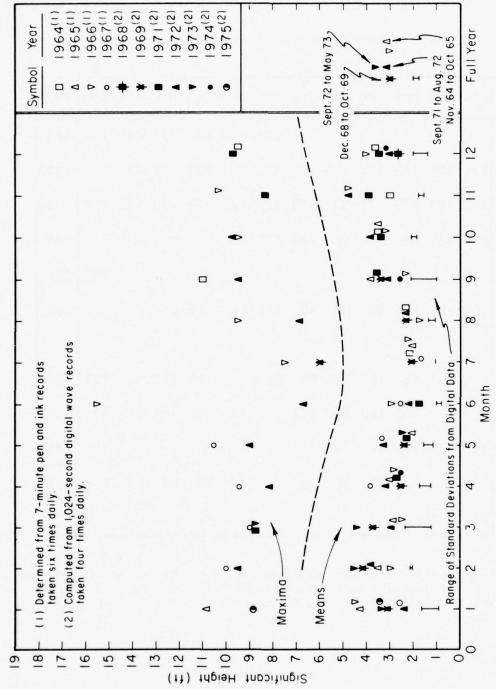


Maxima, means, and standard deviations of significant height from Nags Head, North Carolina. Figure A-28.

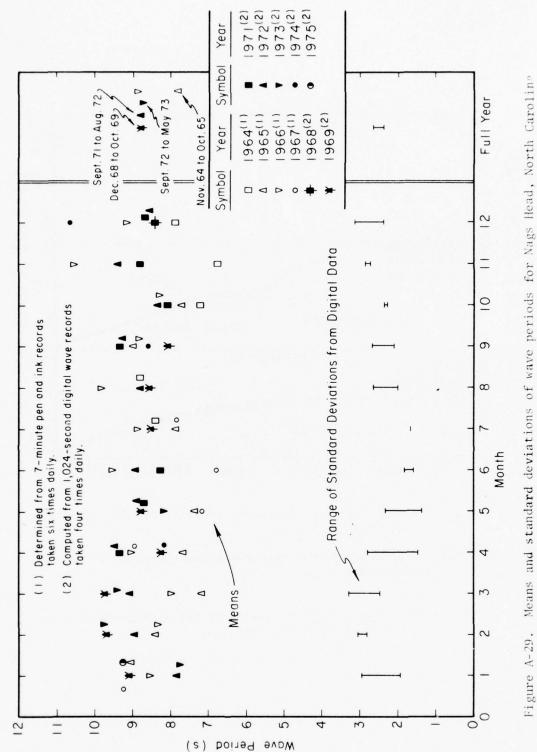

7

CONTRACTOR OF THE PARTY OF THE

Figure A-29.

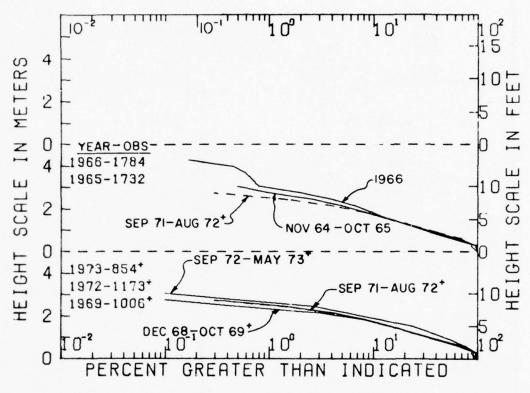

NOTE:

= computed from 1,024-second digital wave records taken four times daily.

Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-30. Cumulative significant height distributions from Nags Head, North Carolina.

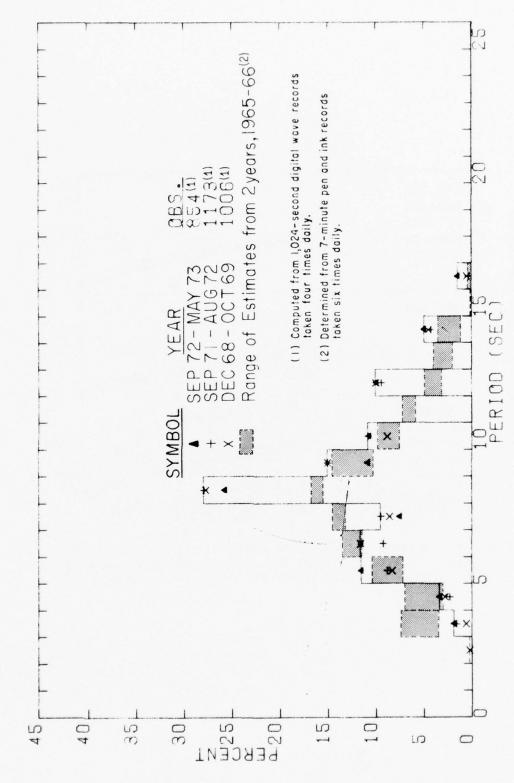


Figure A-31. Annual significant period distributions from Nags Head, North Carolina.

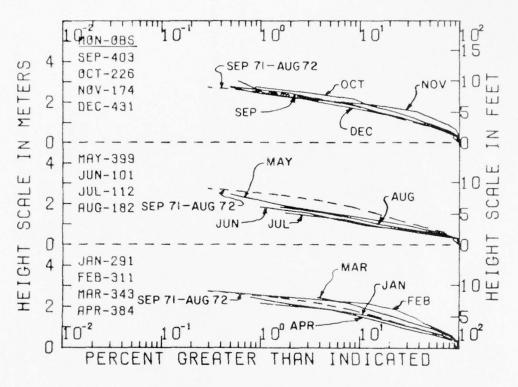


Figure A-32. Seasonal summaries of cumulative significant height distributions from Nags Head, North Carolina; computed from 1,024-second digital wave records taken four times daily.

Table A-18. Wave climate for Nags Head, North Carolina. Distribution of significant height versus period (in observations per 1,000 observations).

591 083	RVATION	•	8	UMMARY	FOR 3	144 Pd	JAN 72	JAN 73			
PERIOD (SECS)				816.	HEIGH	T (FT)					
	0-1	1-5	2=5	5-4	4=5	5.6	6-7	7-8	101.	CUM. 101.	
0.09											0.00
1.0 - 1.9											0.00
2.0 . 2.9		3							5		1.50
3.0 - 3.9			14	3					21		2.50
4.0 - 4.9		14	27		3				45		2.35
5.0 - 5.9		27	38	45	27	27			141		5.09
6.0 . 5.9		24	24	52	27	27	7		162	790	3.69
7.0 . 7.9		10	3.1	10	10	10	7		79	629	3.50
8.0 - 8.9	10	76	89	21	7	24	3		230	550	2.60
9.0 - 9.9		55	3.1	10	10		7		115	350	2.53
10.0 -10.9	3	34	14	14		3			69	206	2.25
1.0 -11.9										137	0.00
2.0 -12.9		31	17	24	7	7	7	7	100	157	3.40
3.0 -13.9										38	0.00
4.0 -14.9	3	3	7		3		10	3	31		4.28
15.0 -15.9											0.00
16.0 -16.9	3			3					7		2.00
TOTAL	15	282	292	182	96	76	41	10			2,99
CUM. TOTAL	1000	979	698	405	223	127	52				
COL. AVG.	11.170	8.62	7.81	7.93	7.43	7.95	10,33	13.17	8.26		
AVERAGE SIG.	HETCHT		6 FT			VEHAGE	MAVE	PERIOD		9 81 0	
VARIANCE OF	TC HET	CHT	2 31	FT 90				HAVE PE			

STANDARD DEVIATION OF HEIGHT # 1.48 FT STANDARD DEVIATION OF PERIOD # 2.58 SEC+

RESULTS OBTAINED FROM 1024#5FCOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE WAVE GAGE LOCATED AT JENNETTES PIER.

* CALMS ARE OMITTED.

311 0898	RVATION	3	8	UMMARY	FOR	FB 69	FEB 7	2 FEB 7						
PERIOD (SECS)				\$16.	HEIG	HT (FT)								
0.09	0-1	1.5	5.2	3-4	4 • 5	5.6	5=7	7 • 8	8-9	0 · 1 0	101.*		0.00	
1.0 - 1.9													0.00	
3.0 - 3.9			. 6	10							19		2.83	
4.0 . 4.9	3	3	6	. 6							19		2.33	
5.0 . 5.9	3	10	42	29	23	10	3				119	961	3.34	
6.0 . 6.9		13	59	10	26	23	23	6			129	842	4.39	
7.0 . 7.9		3	6	13	53	10	3	6			64		4.50	
8.0 . 8.9	3	10	50	16	16	16	29	6	6		132		4.52	
9.0 . 9.9		19	26	26	3	6	1.7		3		96		3.70	
10.0 -10.9	3	19	16	35	13	6	23	13		3	155	421	4.00	
11.0 -11.9													0.00	
12.0 -12.9	3	32	35	23	10	23	23	23			170	299	4.10	
13.0 -15.9						-						129	0.00	
14.0 -14.9		26	52	6		3	10	42	3		155	129	4.61	
15.0 -15.9									_			6	0.00	
16.0 -16.9								3	3		6	6	8.00	
TOTAL	16	138	855	174	113	96	113	105	16	3			4.10	
CUM. TOTAL	1000	984	846	617	444	351	235	122	19	3				
COL. AVG.	8.30		9.13	8.69	7.84	8.97	9.70			10.50	9.45			
AVERAGE SIG.	HEIGHT !	4.1	0 FT			AVEHAGE	MAVE	PERIOD	. 9	.45 580				
VARIANCE OF S	IG. HEI	HT .	4,23	FT 90	,	VARIANCE	E OF	AVE PE	RIOD I	8.9	1 SEC	90.		

STANDARD DEVIATION OF HEIGHT # 2.06 FT STANDARD DEVIATION OF PERIOD # 2.99 SEC.

											CUM.	RUR
	0-1	1.7	2 - 3	3-4	4.5	5.6	6-7	7 . 8	8=9	101.	101.	AVG.
0.09											1000	0.00
1.0 . 1.9											1000	0.00
2.0 . 2.9											1000	0.00
3.0 - 3.9		3	9	3						15	1000	2.50
4.0 . 4.9		Q	9	9						26	985	2.50
5.0 . 5.9		9	32	32	17	5			3	96	959	5.38
6.0 - 6.9		6	53	50	6	12	3		6	85	863	5. AB
7.0 . 7.9		Q	17	12	9	12	3	6		67	778	3.93
8.0 . 8.9	3	61	47	50	44	6		9	3	222	711	3.17
9.0 . 9.9		26	38	32	9	15	3	3	3	125	490	5.51
10.0 -10.9		50	17	23	6	15	12		6	125	364	3.31
11.0 -11.9											239	0.00
12.0 -12.9		26	23	26	26	15	15	6	6	140	239	4.00
13.0 -13.9											99	0.00
14.0 -14.9		12	15	6	6	9	15	6	9	73	99	4.86
15.0 -15.9											26	0.00
16.0 -16.4					6	6		12	3	26	26	6.50
TOTAL	3	510	155	555	128	8.5	50	41	3.6			3.64
CUM. TOTAL	1000	997	787	560	336	210	128	79	38			
COL. AVG.	8.50	9.47	8.49	8.51	9,55	10,18	11.79	12,14	10.96	4.38		

AVERAGE SIG, HEIGHT = 3.62 FT

VARIANCE OF SIG, HEIGHT = 3,64 FT SU

STANDARD DEVIATION OF HEIGHT = 1.91 FT

AVERAGE MAVE PERIOD = 9.39 SEC*

VARIANCE OF MAVE PERIOD = 8.09 SEC SQ*

STANDARD DEVIATION OF PERIOD = 2.84 SEC*

RESULTS OBTAINED FROM 1024-5ECOND DIGITAL RECORDS TAKEN WITH A STEP RES, AND CONT. WIRE MAYE GAGE LOCATED AT JENNETTES PIER.

CALMS ARE OMITTED.

384 0836	RVATION	•	8	UMMARY	FOR A	PR 69	APR 71	APR 72	APR 74			
PERIOD (SECS)				310.	HEIGH	T (FT)						
(9679)												
											CUM.	
	0-1	1 - 5	5 - 2	3-4	4.5	5-6	6-7	7-8	8-4	101.	101.	AVG
0.09												0.00
1.0 - 1.9											1000	0.00
2.0 - 2.9		5	3									1.83
5.0 - 3.9		10	5							16		1.83
4.0 - 4.4			8	13						50		2.68
5.0 - 5.9		31	16	16	13	5				81		2.82
6.0 - 6.9	5	53	5 9	10	A	5	5 5			83		2.91
7.0 - 7.9		13	18	5			5			60	784	3.50
8.0 - 8.9	16	158	78	16	16	3	3	3	3	263	724	2.25
9.0 - 9.9	5	65	A1	44	16	8	5	5	3	535	461	2.87
10.0 -10.9		10	56	8	16	10	5	3		107	559	3.11
11.0 -11.9											122	0.00
12.0 .12.9	5	24	13	8	5	3	10		3	73		3.14
13.0 -13.9												0.00
14.0 -14.9		26	15	5						44		2.03
15.0 -15.9											5	0.00
16.0 -16.9		5								5		1.50
TOTAL	50	380	289	125	8 1	44	34	10		-		2.72
CUM. TOTAL	1000	971	591	302	177	96	52	10	8			
COL. AVG.	4.23.	8.97	8.73	8.48	8.56	8.56	9.75		10.17	8.84		
AVERAGE SIG.	HEIGHT .	2.7	0 FT			VERAGE	HAVE	PERIO		90 SEC		
VARIANCE OF S	IG. HEI	HT .		FT 50		ARIANC					3 SEC	80.
STANDARD DEVI	ATION OF	HEIG	HT .	1.51 #	1 9					100	2.10	SICO

BEST AVAILABLE COPY

.09 .0 - 1.9 .0 - 2.9 .0 - 3.9 .0 - 4.9 .0 - 5.9 .0 - 5.9 .0 - 7.9												
.09 .0 - 1.9 .0 - 2.9 .0 - 3.9 .0 - 6.9 .0 - 5.9 .0 - 5.9 .0 - 7.9				81G.	HEIGH	T (FT)						
.09 .0 - 1.9 .0 - 2.9 .0 - 3.9 .0 - 4.9 .0 - 5.9 .0 - 5.9 .0 - 7.9												
.09 .0 - 1.9 .0 - 2.9 .0 - 3.9 .0 - 4.9 .0 - 5.9 .0 - 5.9 .0 - 7.9											cu=.	RO.
.0 - 1.9 .0 - 2.9 .0 - 3.9 .0 - 4.9 .0 - 5.9 .0 - 6.9 .0 - 7.9	0-1	1.5	8-1	3.4	4-5	5.0	4-7	7-0		101.	101.0	AVG.
.0 - 2.9 .0 - 3.9 .0 - 4.9 .0 - 5.9 .0 - 6.9 .0 - 7.9											1000	0.00
.0 - 3.9 .0 - 4.9 .0 - 5.9 .0 - 6.9 .0 - 7.9											1000	0.00
.0 - 4.9 .0 - 5.9 .0 - 6.9 .0 - 7.9												0.00
.0 - 5.9 .0 - 6.9 .0 - 7.9		3	10	,						15		2.50
.0 - 6.9		3	1	10						53		3.50
.0 - 7.4		•	15	10			3			46		1.29
.0 - 8,4	3	10	50	5	13					50		2.80
	•	30	35	13	5	3			3	93		2.55
	8	208	125	60	5.2		3			454		2.36
.0 - 4.4	•	63	45	43	19	10				160		2.67
.0 -10.9	5	50	13	13	13	10	3	3		78	130	3.27
.0 -11.9												0.00
.0 -12.4		25	13		,		,	,		48		2.66
.0 -13.0											13	0.00
.0 -14.4		•	3						3	10	13	3.50
.0 -15.0												0.00
.0 -16.9			3							3	3	2.50
TAL	25	371	283	183	88	30	10	,	•			2.62
	000	479	600	351	136	50	50	10	•			
L. AVG. 8	.700	8.69	8.41	8.17		4,42	9,25	11.50	11.00	0,61		
ERAGE 810, HEI	GHT .			FT 50		VERAGE						
RIANCE OF BIG.												

REBULTS OBTAINED FROM 1020-52COMD DIGITAL RECORDS TAKEN HITM A STEP RES, AND CONT. WIRE MAYE GAGE LOCATED AT JENNETTES PIER,
P CALMS ARE OMITTED.

0-1 1-2 2-3 3-4 2-5 5-6 2-7 TOT. TOT. AV 1.0 - 1.0 2.0 - 2.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 2.1 925 21					10m							193 094
(8ECS) 0-1 1-2 2-3 3-4 4-5 5-6 4-7 TOT.* TOT.* A 0.09 1000 0. 2.0 - 2.0 1000 0. 3.0 - 3.0 5 1000 3. 4.0 - 4.0 21 21 21 22 21 22 21 22 31 32 31						. /1	FOR 30	U	•	•	K + A) 1 UN	145 0985
(aECS) 0-1 1-2 2-3 5-4 4-5 5-6 4-7 TOT, TOT, A 0.04 1.0 - 1.9 2.0 - 2.0 3.0 - 3.9 4.0 - 4.9 21 21 21 21 21 21 21 21 21 2						(77)	HEIGHT					PERTOD
0-1 1-2 2-3 3-4 2-5 5-6 2-7 TOT. TOT. AV 1.0 - 1.0 2.0 - 2.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 2.1 925 21												(SECS)
0-1 1-2 2-3 3-4 2-5 5-6 2-7 TOT. TOT. AV 1.0 - 1.0 2.0 - 2.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 2.1 925 21		RO	CUH.									
0.00 1.0 - 1.0 2.0 - 2.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0	G		101.	TOT	4.7	4-6	4-5	5.4		1-2	0-1	
1.0 - 1.0 2.0 - 2.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0 3.0 - 3.0	00	0.1					•	•			•	0.09
2.0 - 2.9 1000 0. 3.0 - 3.9 3 1000 3. 4.0 - 4.9 21 21 995 2.	0.0	0.	1000									
4.0 - 4.4 21 995 21		0.	1000									
				5				4				3.0 - 3.9
				21					21			
				31				10	10	5		5.0 - 5.9
6.0 - 6.9 16 36 16 5 73 943 20							5	16				
7.0 - 7.9 62 26 10 99 870 10 5.0 - 6.9 5 354 69 21 10 5 5 490 771 10								10	26			
5.0 - 5.9 5 350 69 21 10 5 5 690 771 10 9.0 - 9.9 115 62 5 5 167 281 10					•	5	10	21			•	
		1.				5	•		. 5			
10.0 -10.9 52 20 78 115 1.				70					5.0	25		
11.01.0	00	0.	36									
12.0 -12.4 16 10 26 36 1				50					10	10		
15.0 -15.4												
10.0 -10.0 10 10 10 10			10	10							_	16.0 -16.4
	••	2,			5	10						TOTAL
CUM. TOTAL 1000 445 365 104 36 16 5						10	36	100				COL TOTAL
COL. AVG. 8,500 8,00 8,20 6,61 8,25 0,00 8,50 8,56				.,,,	0.50	.00	4.25			8.00	0.50	COL. AVG.

AVERAGE BIG. HEIGHT # 1.45 PT VARIANCE OF BIG. HEIGHT # 3.60 PT BO VARIANCE OF WAYE PERIOD # 2.44 BEC 800 BTANDARD DEVIATION OF MEIGHT # 3.60 PT BO STANDARD DEVIATION OF PERIOD # 1.71 BEC.

RESULTS OBTINGE FROM JEAN-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE CALMS AND OMITTED.

SUMMARY FOR JUL 69 112 OBSERVATIONS SIG. MEIGHT (FT) PERTOD (SECS) CUM. RUW TOT. • AVG. • 1000 0.00 1000 0.00 0-1 5-6 101. 1-5 2-5 3-4 4-5 0.0 = .9 1.0 = 1.9 2.0 = 2.9 3.0 = 5.9 4.0 = 4.9 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.0 11.0 = 11.9 12.0 = 12.9 15.0 = 13.9 1000 0.00 1000 1.50 991 1.50 982 3.00 964 1.75 929 2.00 857 2.39 777 1.87 295 2.54 89 1.50 36 0.00 36 1.50 9 0.00 9 .50 2.03 9 1 8 9 71 9 18 36 71 80 482 205 27 36 27 339 71 54 9 18 18 27 18 18 18 27 27 13.0 -13.9 14.0 -14.9 TOTAL CUM. TOTAL 598 946 8.51 205 348 8.33 COL. AVG.

AVERAGE SIG. HEIGHT = 2.01 FT AVERAGE HAVE PERIOD = 8.53 SEC*
VARIANCE OF SIG. HEIGHT = 1.04 FT SG VARIANCE OF HAVE PERIOD = 2.73 SEC SG*
STANDARD DEVIATION OF HEIGHT = 1.02 FT STANDARD DEVIATION OF PERIOD = 1.65 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL HECORDS TAKEN WITH A STEP RES, AND CONT. WIRE WAVE GAGE LOCATED AT JENNETTES PIER.
* CALMS ARE OMITTED.

SUMMARY FOR AUG 69 AUG 72 182 OBBERVATIONS PERIOD SIG. HEIGHT (FT) (SECS) CUM. ROW TOT. . AVG. . 0.0 - .0 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 15.9 14.0 - 14.9 15.0 - 15.9 14.0 - 16.9 10.0 - 10.9 4.5 6-7 TOT. . TOT. • AVG. •
1000 0.00
1000 0.00
1000 0.00
1000 2.00
989 3.10
982 3.58
890 2.37
808 1.70
502 2.55
170 2.61
121 0.00
121 2.75
77 0.00
5 1.50
2.50 1.5 2.3 5 11 11 16 27 33 27 126 16 27 2 2 5 27 71 82 110 396 132 11 33 198 11 11 16 11 16 16 5 5 44 25 33 5 71 1.50 308 500 8,29 99 27 44 8.10 451 951 1000 9.05 10.50 8.73

AVERAGE SIG. HEIGHT = 2.26 FT VARIANCE OF SIG. HEIGHT = 1.45 FT SQ STANDARD DEVIATION OF HEIGHT = 1.20 FT

A STATE OF THE PARTY OF THE PAR

AVERAGE MAVE PERIOD = 8.68 SEC*
VARIANCE OF WAVE PERIOD = 5.47 SEC SU*
STANDARD DEVIATION OF PERIOD = 2.34 SEC*

#03 OBSERVATIONS SUMMARY FOR SEP 69 SEP 71 SEP 72 SEP 74

PERIOD SIG. HEIGHT (FT)

(SECS)

												CUM.	
	0-1	1.5	5.3	3-4	4-5	506	6-7	7-8	8 . 9	9-10	TOT.*	101.	AVG.
0.09	•											1000	0.00
1.0 - 1.9												1000	0.00
2.0 . 2.9		2									5	1000	1.50
3.0 - 3.9		2	5	5							12	998	2.70
4.0 - 4.9			10	5.5	5					2	57	985	5.70
5.0 - 5.9		17	5.5	5.5	17	7	5				92	948	3.39
6.0 - 6.9	2	17	40	27	12	5	7				112	856	3.17
7.0 - 7.9		12	12	20	15	10			?		69	744	3.61
8.0 - 8.9	12	74	94	20	20	12	5		5	2	243	675	2.70
9.0 - 9.9	2	27	37	25	20	5	7	10			134	432	3.44
10.0 -10.9	5	25	35	15	15	17	20	5	5		139	298	5.82
11.0 -11.9												159	0.00
12.0 -12.9	10	37	25	15	17	2	7	5	5		124	159	5.18
13.0 -13.9												35	0.00
14.0 -14.9	10	17	5		5						35	35	1.57
TOTAL	42	233	285	171	119	60	52	17	15	5			3.19
CUM. TOTAL	1000	958	725	439	268	149	89	57	50	5			
COL. AVG.	11.030	9.37	8.54	7.67	6.79	8.63	9.40	10.50	10.33	6.50	8.82		

AVERAGE SIG. HEIGHT = 3.15 FT AVERAGE HAVE PERIOD = 8.85 SEC*
VARIANCE OF SIG. HEIGHT = 3.08 FT SG VARIANCE OF MAVE PERIOD = 6.01 SEC SG*
STANDARD DEVIATION OF MEIGHT = 1.75 FT STANDARD DEVIATION OF PERIOD = 2.45 SEC*

RESULTS OBTAINED FROM 1024-BECOND DIGITAL RECORDS TAKEN WITH A STEP RES, AND CONT. WIRE WAVE GAGE LOCATED AT JENNETTES PIER.

CALMS ARE OMITTED.

226 DBSFRVATIONS SUMMARY FOR OCT 71 OCT 72 PERIOD (SECS) SIG. HEIGHT (FT) CUM. RUN TOT. . AVG. . 9-10 707.* 4-5 0-1 1-2 5.2 3-4 5.6 7-8 0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.8
8.0 - 8.9
9.0 - 9.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 15.9
15.0 - 15.9
15.0 - 15.9
15.0 - 16.9
TOTAL
COUM. TOTAL
COUM. TOTAL 1000 0.00 1000 0.00 1000 2.17 987 3.38 951 3.50 823 2.91 553 3.46 270 4.40 115 0.00 115 5.25 4 0.00 4 1.50 18 22 27 40 88 22 35 128 128 142 283 88 9 49 31 35 31 13 35 31 66 18 13 40 13 9 27 16 27 13 9 22 9 9 27 25 88 13 25 27 199 1000 973 7.83* 8.39 257 774 8.03 168 518 7.05 128 350 8.05

174 086	ERVATIONS	•	UMM	FOR N	OV 71	HOV 7					
(SECS)			.10	HE 1 0 H	* (**)					
	0-1 - 1-2	2-3	3-4	4-5	9-6	4-7	1-8		101.0		AVG
1.0 - 1.9											0.00
2.0 - 2.9										1000	0.00
1.0 - 1.9										1000	3.50
4.0 - 4.9		11		23							3.79
5.0 - 5.9		11	34	29	6					954	5
0.0 - 0.9			2.		. 9	53			172		5.23
7.0 - 7.9			11	•	57	•	11		103		5.11
8.0 - 8.9	17	14	14	11	17	11	•		120	502	3.59
9.0 - 9.9	11	34	34	ii	17						3.44
10.0 -10.9	11	43	.0	11	17	11			155	300	3.46
11.0 -11.0	• • • • • • • • • • • • • • • • • • • •	•		•						213	0.00
12.0 -12.0	11	34	17	17	23	17			121	213	3.40
13.0 -13.9			•							45	0.00
10.0 -10.0			11		29	2.			75	92	5.27
15.0 -15.0			• •		•					17	0.00
10.0 -10.9						11			17	17	0.17
TOTAL	•3	190	218	149	241	115	17				4.20
CUM. TOTAL	1000 1000	.37	7.7	529	379	138	23				
COL. AVG.	0.00-10.23		0.01	7.42		11.00	7.17	0.50	7.00		

AVERAGE 810. HEIGHT = 4.20 PT VARIANCE OF 810. HEIGHT = 2.50 PT 80 VARIANCE OF 810 MAYE PERIOD = 8.00 SEC 800 STANDARD DEVIATION OF HEIGHT = 1.50 PT VARIANCE OF VARIANCE OF PERIOD = 2.00 SEC 800 STANDARD DEVIATION OF PERIOD = 2.00 SEC 800 SEC 800

(SECS)				516.	HEIGH	T (FT)							
	0-1	1=2	2=3	3-4	4-5	5+6	607	7-8	A-9	9-10	101.	CUM. 101.	
0.09	0	1-6	£ 3	,	•	,	0-1	, - 0	0				0.00
1.0 - 1.9												1000	
2.0 - 2.9												1000	
5.0 - 3.9	2		12	5							16	1000	2.36
4.0 - 4.9		7	12	5	2						26	984	2.59
5.0 . 5.9	2	12	53	85	19	7	12				102	958	3.60
.0 - 6.9	5	16	16	32	21	12	7	2	5		111		3.7
7.0 - 7.9	5	19	7	21	23	14	7	5			97		3.7
8.0 - 8.9	21	42	58	28	35	19		12	5	5	550		3.20
.0 - 9.9	16	56	28	14	9	7		5			104		5.6
0.0 -10.9	5	56	30	23	5	7	5				45		2.76
.0 -11.9													0.0
2.0 -12.9	5	63	50	51	9	5	5	,			159		5.3
5.0 =13.9													0.0
1.0 -14.9	•	39	15	7	12	5					79		2.4
0.0 -15.9													0.0
0.0 -16.9	2	16		2					_	_	51	51	1.6
DTAL	65	265	553	183	135	74	30	19	5	5			3.09
M. TOTAL	1000	935	671	448	265	132	58	58					
L. AVG.	9,4601	0.69	8.71	8.53	8.43	8.53	7.12	8.25	7.50	8.50	9.14		

BEST AVAILABLE COPY

3446 068ER	VATION	•	•	UMMARY	FOR	34 HONTES	DEC 6	8 THROUGH	DEC	74			
PER100 (BECB)				816,	HEIGH	(FT)							
								• • •			*** *	CUM.	-
0.00	0-1	1-5	5-2	3-4	4.5	7	•••	7.6	•••	4-10	101.		0.00
1.0 - 1.4													0.00
2.0 - 2.0											,		1.67
3.0 - 3.4			7	,							10		2.44
.0 - 4.9		:	12	,	3						29		2.97
5.0 - 5.9	1	10	23	20	17	,	•				•0		3.33
.0 - 6.9	į	17	25	55	10	12		1			104		3.50
.0 - 7.9	2	21	1.	10	11	11	1	,	i		45		3.36
.0 - 0.9	11	112	78	35	20	13		ā	,	1	280		2.65
.0 - 9.9	3	44	3.	25	12	,	3		1		140	397	2.43
.0 -10.9	5	2.	23	17		10	7	2	1	1	••	257	3.27
.0 -11.9			-									150	0.00
2.0 -12.9	3	30	20	13	11	•			2		**		3.42
.0 -13.9													0.00
.0 -14.9	3	17	10	3	3	3	5	•	5		50		3.45
.0 -15.4			12.07										0.00
.0 -16.9	1			1	1	1	1	1	1		•	•	3.00
TAL	2.0	297	258	164	102	6.	43	25	11				3.49
JM. TOTAL	1000	971	674	.16	252	100	80	30	13				
DL. AVG.		4.21	0.50	0.10	6,35	0.88		11.00 10		0.36			
ERAGE SIG. H	-	3.0	7 .7			VERAGE I	AVE !	-		A7 BEC			
RIANCE OF BI	. HE 10	. 146	3.01	FT 80	v	ARTANCE	OF W	WE PERI	00	4.1	. SEC	800	
ANDARD DEVIA	TION OF	HEIG	HT .	1.74 1		TANDARD							

RESULTS OBTAINED FROM 1024-SECOND DIGITAL MAYE GAGE LOCATED AT JENNETTES PIER.
• CALMS ARE OMITTED.

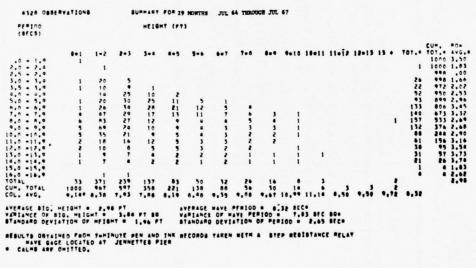



Table A-19. CERC wave gage history for Johnny Mercer Pier, Wrightsville Beach, North Carolina.

			Pier Length (feet)	800								
		LOCATION: Johnny Mercer Pier, Wrightsville Beach, North Carolina	Distance from seaward end of pier	0								
		htsville Bea	Water Depth (ft MSL)	17								
0		ercer Pier, Wrig	Gage Range (ft MSL)	-8 to +17								
-		Johnny M	Gage Length (feet)	25								
,		LOCATION:	Explanation	19 Mar. 1970 27 Jan. 1972 Gage electronics vandalized.	31 Jan. 1972 24 July 1972 Gage struck by lightning.	9 Aug. 1972 18 Sept.1972 Gage struck by lightning.	28 Oct. 1972 21 Mar. 1973 Power off at pier.	4 Aug. 1973 Gage struck by lightning.	4 Oct. 1973 31 May 1974 Gage struck by lightning.	20 July 1974 3 Nov. 1974 Gage ground disconnected by vandals.	Still operative as of 1 Mar. 1975.	
-		W.	End of Proper Operation	27 Jan. 1972	24 July 1972	18 Sept.1972	21 Mar. 1973	4 Aug. 1973	31 May 1974	3 Nov. 1974		
	7.4	13' N., 77°47'	Beginning of Proper Operation	19 Mar. 1970	31 Jan. 1972	9 Aug. 1972	28 Oct. 1972	26 Mar. 1973	4 Oct. 1973	20 July 1974	17 Jan. 1975	
	CERC Form 174-74 18 Mar 74	COORDINATES: 34°13' N., 77°47' W.	Type of Gage	Step-resistance, staff-relay type							Continuous-wire staff 17 Jan. 1975	

Table A-20. Number of analyzed digital records from Wrightsville Beach, North Carolina. $^{\rm 1}$

MO YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC	тот
1971			22	96	54	89	76	117	117	113	80	111	875
1972	88	116	119	111	120	109	65	78	67	14	117	82	1086
1973	81	88	88	60	96	75	65	6		62	79	43	743
1974	98	98	85	76	92	8	29	79	69	100	8		742


 $^{^{1}\}mathrm{From}$ 1,024-second records taken four times daily.

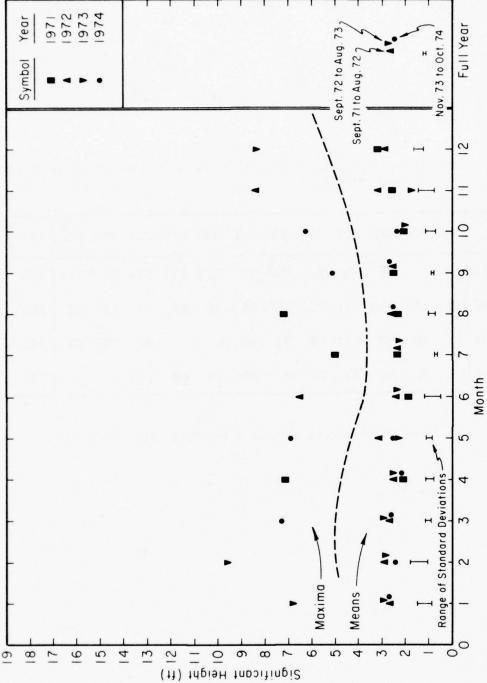

1

THE RESERVE OF THE PARTY OF THE

Maxima, means, and standard deviations of significant height from Wrightsville Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily. Figure A-33.

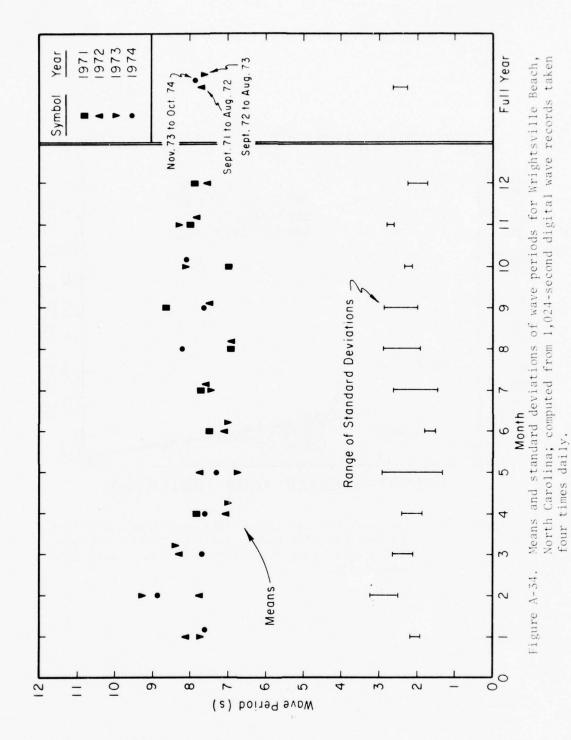

THE RESERVE THE PARTY OF THE PA

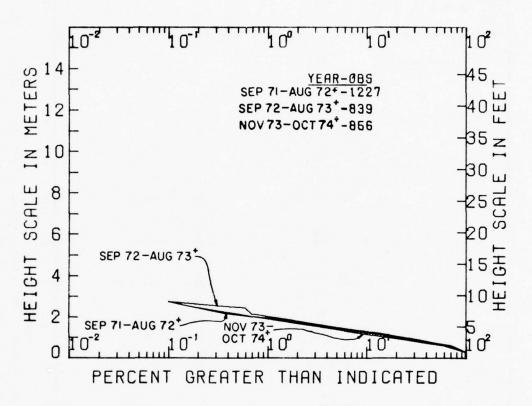
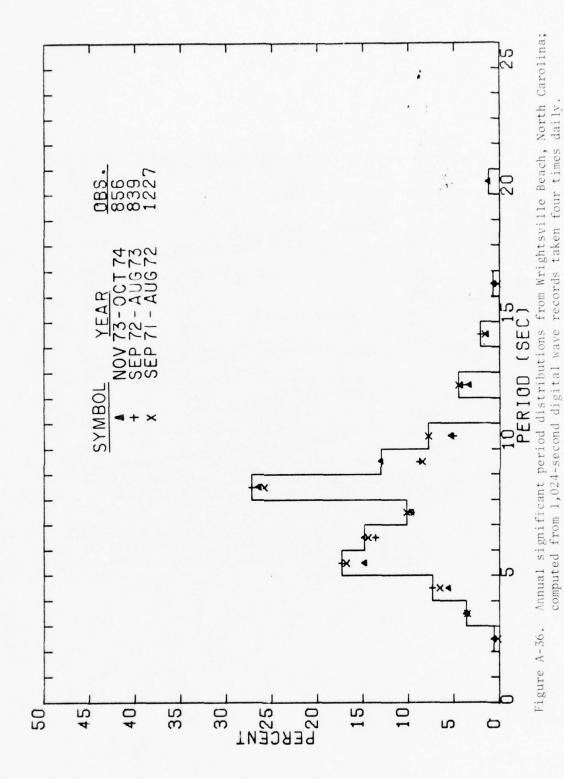


Figure A-35. Annual cumulative significant height distributions from Wrightsville Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily.



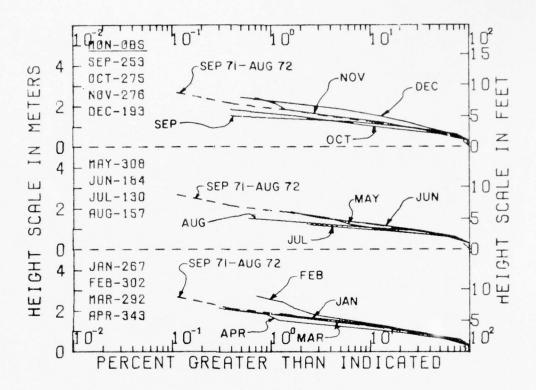


Figure A-37. Seasonal summaries of cumulative significant height distributions from Wrightsville Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily.

Table A-21. Wave climate for Wrightsville Beach, North Carolina.

Distribution of significant height versus period

(in observations per 1,000 observations).

	0=1	1-2	2=3	3-4	4=5	5-6	4.7	TOT	TOT.	
.09		1-6	6.,	,	•••	,	0-7			0.00
0 - 1.9										0.00
0 - 2 - 0										0.00
0 - 3.9		7	15	4				26		2.36
0 - 4.9			26	15	4			45		3.00
0 - 5.9		5.5	37	45	26	11		142		1.26
0 - 6.9	4	34	.56	2.5	55	11		150		2.90
0 - 7.9		19	11	30	26	4	7	97		3,58
0 - 8.9	4	64	124	52	19	7	4	273	539	2.71
0 - 9.9	4	67	67	19	4			161	266	2.20
0 -10.9		41	37	11				• 0	105	2.17
0 -11.9									15	0.00
0 -12.9		7	4					11	15	1.83
0 -13.9									4	0.00
0 -14.9									4	0.00
0 -15.9									4	0.00
0 -16.9										0.00
0 -17.9										0.00
0 -18.9										0.00
0 -19.9										0.00
0 -20.9			4					4	4	2,50
0 +										0.00
AL.	11	595	382	199	101	34	11			2.76
. TOTAL	1000	989	727	345	146	45	11			
. AVG.	8.17*	8.46	7.94	7.25	6.91	6.72	7.83	7.80		

RESULTS OBTAINED FROM 1024-8FCOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY MAYE GAGE LICATED AT JOHNNY MERCER PIER CALMS ARE OMITTED.

302 083	ERVATION	5		SUMMARY	FOR P	28 45	FER 73	FEB 7	4					
PERTOD (SECS)				3 16.	HEIGH	(T (FT)								
	0-1	1 - 2	2.5	3-4	4.5	5.6	6-7	7-8	8-9	9-10	101.	CUM.	RON AVG	
0.09			_										0.00	
1.0 - 1.9												1000	0.00	
6.5 - 0.5		10									10		1.50	
3.0 - 5.9		10	26	7							43	990	2.42	
4.0 - 4.9		7	1.3	13	3						36		2.86	
5.0 - 5.9		30	40	50	30						149	911	3.03	
6.0 - 6.9		50	56	17	10	10			3		86		3.27	
7.0 - 7.9	3	53	50	7	17	7	3				79		3.04	
8.0 - 8.9	3	103	53	50	13	3 7	3		3	7	504		5.63	
9.0 - 9.9		70	46	20	10	7	3	3			159		5.63	
10.0 -10.9		30	40	13		3					86		5.45	
11.0 -11.9													0.00	
12.0 -12.9	7	3.0	33	3							73		1.95	
13.0 -13.9												70		
14.0 -14.9	3	1.0	13	7							33			
15.0 -15.9												36	0.00	
16.0 -16.9		10	3	3	13	3					33		3.40	
17.0 -17.9													0.00	
18.0 -18.9												3	0.00	
19.0 -19.9												2		
20.0 -20.9			3								3	3	2.50	
21.0 +													0.00	
TOTAL	17	351	318	159	96	33	10	3	7	7			2.71	
CUM. TOTAL	1000	983	635	315	156	60	26	17	13	7				
COL. AVG.	11.10	8.78	0,58	7.56	8.26	8.90	8,50	9.50	7.50	8.50	8,51			

SUMMARY FOR MAR 72 MAR 75 MAR 74 292 OBSERVATIONS PERIOD SIG. HEIGHT (FT) CUM. ROW 1000 0.00 1000 0.00 1000 2.00 1000 2.30 966 2.66 918 3.29 771 3.29 640 2.85 572 2.85 379 2.39 188 2.30 86 0.00 86 2.86 41 0.00 41 3.00 2.76 7-8 101. 0.0 = .9 1.0 - 1.9 2.0 = 2.9 3.0 = 3.9 4.0 = 4.9 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 8.0 = A.9 9.0 = 9.9 11.0 = 11.9 12.0 = 12.9 13.0 = 13.9 14.0 = 14.9 TOTAL CUM, TOTAL COL, AVG. 0-1 1-2 2-3 3-4 4-5 21 24 68 45 34 116 82 34 46 147 130 68 233 151 103 10 7 10 10 65 45 10 31 45 14 31 21 7 34 14 10 10 45 17 3 21 490 795 8.23 10 182 305 7.93 41 7 199 1000 993 7.50* 8.66 21 31 7.00

AVERAGE SIG, MEIGHT # 2,75 FT AVERAGE WAVE PERIOD # 8,18 SEC*

VARIANCE OF SIG, MEIGHT # 1,07 FT SQ VARIANCE OF MAVE PERIOD # 6,15 SEC SQ*

STANDARD DEVIATION OF MEIGHT # 1,03 FT STANDARD DEVIATION OF PERIOD # 2,48 SEC*

RESULTS OBTAINED FROM 1024+SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GACE LOCATED AT JOHNNY MERCER PIER

CALMS ARE OMITTED.

******* FOR 180 TI 480 TO 1800TO

343 08388	VATION	3	3	UMMYGA	FOR	DR 71	APR 72	APR73	APR 7	4	
PERIOD (SECS)				SIG.	HFIGH	T (FT)					
										CUM.	ROW
	0-1	1-7	2.3	3.4	4-5	5.6	6 - 7	7 . 5	101.*	TOT	AVG.
0.09										1000	0.00
1.0 - 1.9										1000	0.00
2.0 - 2.9		6	6						15	1000	5.00
3.0 - 3.9		50	50		3 15				52		5.55
4.0 - 4.9		50	59	12	3				61		2,45
5.0 . 5.9	3	47	47	41	15				172		2.60
6.0 - 6.9	3	55	>1	41					160		
7.0 - 7.9		35	35	17	12				99		2.56
8.0 - 8.9	9	140	73	41	6	3	3	3	277		2.25
9.0 - 9.9	12	20	5.0	6			3		70		2,13
10.0 -10.9		56	5.3	3	6				58	96	2.30
11.0 -11.9										3.6	0.00
12.0 -12.9		3	17	3					5.2	38	2.50
13.0 -13.9										15	0.00
14.0 -14.9		6	6						15	15	2.00
15.0 -15.9										3	0.00
16.0 -16.9										3	0.00
17.0 -17.9										3	0.00
18.0 -18.9										3	0.00
19.0 -19.9										3	
20.0 -20.9		3							3	3	1.50
21.0 +											0.00
TOTAL	26	382	373	163	44	3	6	1			2,36
CUM. TOTAL	1000	974	592	219	55	12		3			77.00
COL. AVG.	8.39	7.58	7.26	7.00	6.90	8.50	9.00	8.50	7.37		

AVERAGE SIG, MEIGHT # 2.32 FT AVERAGE MAVE PERIOD # 7.41 SEC*
VARIANCE OF SIG, MEIGHT # .88 FT SQ VARIANCE OF MAVE PERIOD # 5.17 SEC 80*
STANDARD DEVIATION OF MEIGHT # .94 FT STANDARD DEVIATION OF PERIOD # 2.27 SEC*

308 ORSERVATIONS SUMMARY FOR MAY 72 MAY 73 MAY 74 PEHTOD SIG. HEIGHT (FT) (8105) CUM. ROW TOT. A AVG. *
1000 0.00
1000 1.50
990 2.50
990 2.50
998 3.20
893 2.87
688 2.88
562 2.79
429 2.66
68 2.85
49 2.50
36 0.00
36 2.21
13 0.00
13 2.50
6 0.00
6 0.00
6 0.00
6 0.00
6 0.00
6 0.00
6 0.00
6 0.00
2.71 6-7 701.4 2-5 3-4 9.6 0-1 1-2 0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
10.0 - 10.9
11.0 - 11.0
12.0 - 12.9
13.0 - 11.9
15.0 - 15.9
16.0 - 16.9
17.0 - 17.9
18.0 - 17.9
18.0 - 18.9
19.0 - 19.9
20.0 - 20.9
21.0 - 1 10 23 75 205 127 133 341 39 23 29 71 39 42 6 26 13 10 29 39 65 16 13 52 13 52 52 84 6 6 3 10 19 3 3 10 3 23 3 266 1000 997 8.50* 7.71 409 731 7.39 205 84 321 117 6.72 6.85 16 32 7.30

AVERAGE SIG. HEIGHT # 2.66 FT AVERAGE HAVE PERIOD # 7.31 SEC*
VARIANCE OF SIG. HEIGHT # 1.11 FT SO VARIANCE OF WAVE PERIOD # 4.55 SEC SO*
STANDARD DEVIATION OF MEIGHT # 1.06 FT STANDARD DEVIATION OF PERIOD # 2.13 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT JOHNNY MERCER PIER

CALMS ARE OMITTED.

184 OBSE	RVATION	8	3	UMMARY	FOR .	JUN 72	JUN 73	,			
PERIOD				SIG.	HFIG	T (FT)					
(SECS)											
									CUM.		
	0 = 1	1-2	2-3	3 . 4	4.5	5.6	6-7	07.	TOT	AVG.	
0.09									1000	0.00	
1.0 - 1.9									1000	0.00	
2.0 . 2.9		5						5	1000	1.50	
3.0 - 3.9		11	27	5				43		2.38	
4.0 - 4.9		11	33					43	951	2.25	
5.0 - 5.9		27	87	49				163		2.63	
6.0 = 6.9	5	76	98	16	11	16	5	855		2.60	
7.0 - 7.9		43	49	11	5		11	120		2.68	
8.0 - 8.9		179	147	11	5	5		348		2.09	
9.0 - 9.9		27	5		5			3.6		2.07	
10.0 -10.9		5	5					11		2.00	
TOTAL	. 5	386	451	92	27	55	16			2.36	
CUM. TOTAL	1000		609	158	65	3.5	16			.,,,,	
COL. AVG.	6.50*		6.83		7.70	7.00	7.17	7.07			
AVERAGE SIG.	HEIGHT	. 2.1	A FT			VEDAGE	WAVF	PERIOD		10 SEC*	
VARIANCE OF S				FT 90	(APTANC		AVE PE	Rino .	2.42 SEC	
TANDARD DEVI	TION O	. HETC	WT .	01 6						100 = 1.56	

130 ORSERVATIONS SUMMARY FOR JUL 72 JUL 73
PERIOD
(SECS)

							CUM.	ROW	
	0-1	1-7	2-3	3-4	4-5	TOT	TOT	AVG.	
0.09							1000	0.00	
1.0 - 1.9							1000	0.00	
2.0 - 2.9							1000	0.00	
3.0 - 3.9			31			31	1000	2.50	
4.0 - 4.9			46	8		54	969	2.64	
5.0 . 5.9		69	46	31		154	915	2.35	
6.0 - 6.9		77	38	3.8		154	762	2.25	
7.0 - 7.9		31	62			92	608	2.17	
8.0 - A.9		108	828	31	15	392	515	2.38	
9.0 - 9.9		15	38			62	123	2.38	
10.0 -10.9			8				62	2.00	
11.0 -11.9							46	0.00	
12.0 -12.9			31			38	46	2.30	
13.0 -13.9								0.00	
14.0 -14.9						8		1.50	
TOTAL		153	538	115	23			2.34	
CUM. TOTAL	1000	1000	677	138	23				
COL. AVG.	0.00.	7.62	7.69	6.83	7.50	7.56			

AVERAGE SIG. HEIGHT # 2.26 FT VARIANCE OF SIG. HEIGHT # .47 FT SG VARIANCE OF MAVE PERIOD # 7.54 SECP VARIANCE OF MAVE PERIOD # 3.69 SEC SQ# STANDARD DEVIATION OF HEIGHT # .69 FT STANDARD DEVIATION OF PERIOD # 1.97 SEC#

RESULTS OBTAINED FROM 1024-BECOND DIGITAL RECORDS TAKEN HITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT JOHNNY MERCER PIFR

CALMS ARE OMITTED.

157 OBSERVATIONS SUMMARY FOR AUG 72 AUG 74 PERIOD SIG. HEIGHT (FT) (SECS) CUM. ROW TOT. # AVG. * 1000 0.00 1.50 994 3.17 975 3.43 879 2.85 713 2.46 146 2.60 83 2.50 87 0.00 38 1.83 19 0.00 13 0.00 13 0.00 13 0.00 13 0.00 2.55 5-6 101.4 3.4 0-1 1-2 5 . 3 4-5 1.0 - 1.0 2.0 - 2.0 3.0 - 3.0 4.0 - 4.0 5.0 - 5.0 6.0 - 6.0 7.0 - 7.0 9.0 - 0.0 10.0 - 11.0 12.0 - 12.0 13.0 - 15.0 14.0 - 11.0 15.0 - 15.0 16.0 - 16.0 17.0 - 17.0 18.0 - 17.0 19.0 - 17.0 21.0 - 20.0 21.0 + 707AL CUM. TOTAL CUM. TOTAL CUM. TOTAL CUM. TOTAL 19 96 166 159 121 287 64 51 108 45 25 13 57 57 13 13 13 25 70 57 96 19 19 19 13 13 6 287 1000 1000 0.00* 8.14 255 293 6.88

AVERAGE SIG. HFIGHT = 2.52 FT VARIANCE OF SIG. MEIGHT = .64 FT SQ STANDARD DEVIATION OF HEIGHT = .80 FT VARIANCE OF HAVE PERIOD . 7.57 SEC. VARIANCE OF HAVE PERIOD . 6.86 SEC SQ. STANDARD DEVIATION OF PERIOD . 2.62 SEC.

253 OBSERVATIONS

BUMMARY FOR SEP 71 SEP 72 SEP 74

PERIOD (SECS)

O=1 1=2 2=3 3=4 4=5 5=6 TOT.* TOT.* AVG.*

1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00
1000 0.00

0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
9.0 - 9.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
TOTAL
CUM. TOTAL
CUM. TOTAL 707. AVG.1 1000 0.00 1000 0.00 1000 0.00 1000 2.25 968 2.94 662 3.18 739 2.83 621 2.45 545 2.52 340 2.37 249 2.21 115 0.00 115 2.54 16 0.00 16 2.25 16 32 59 47 51 36 55 16 12 28 20 123 119 75 206 91 16 32 130 8 32 40 50 134 24 51 20 99 4 245 1000 996 10.50* 8.90 217 289 2.25 16 462 751 8.11 6.50 8.08

AVERAGE SIG. HEIGHT = 2.55 FT AVERAGE HAVE PERIOD = 8.11 SEC*
VARIANCE OF SIG. HEIGHT = .66 FT SG VARIANCE OF MAVE PERIOD = 6.84 SEC SG*
STANDARD DEVIATION OF HEIGHT = .81 FT STANDARD DEVIATION OF PERIOD = 2.62 SEC*

RESULTS OBTAINED FROM 1024=SFCOND DIGITAL RECORDS TAKEN MITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT JOHNNY MERCER PIER

CALMS ARE OMITTED.

275 OBSERVATIONS SUMMARY FOR OCT 71 OCT 73 OCT 74 PERIOD SIG. HEIGHT (FT) (SECS) CUM. ROW 1001 0.00 1000 0.00 1000 1.50 996 1.83 964 2.32 902 2.57 749 2.31 593 2.10 465 2.28 200 2.18 120 1.79 69 0.00 69 1.65 0.0 = .9 2.0 = 2.9 3.0 = 3.9 4.0 = 4.9 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.9 11.0 = 11.9 12.0 = 12.9 13.0 = 13.9 14.0 = 14.9 15.0 = 15.9 16.0 = 16.9 TOTAL CUM. TOTAL CUM. TOTAL CUM. AVG. 2.3 6.7 101.4 0-1 1.2 33 22 33 58 65 124 11 62 153 156 127 265 80 51 29 84 73 55 84 18 7 11 29 22 4 18 7 7 4 22 40 69 1.65 22 0.00 22 1.50 7 0.00 7 1.50 2.21 29 4 47 7 4 15 1000 10.50* 451 971 8.15 371 520 7.09 98 149 6.98 COL. AVG.

AVERAGE SIG. HEIGHT # 2.14 FT AVERAGE HAVE PERIOD # 7.65 SEC*
VARIANCE OF SIG. HEIGHT # .88 FT SG VARIANCE OF WAVE PERIOD # 5.51 SEC SG*
STANDARD DEVIATION OF HEIGHT # .94 FT STANDARD DEVIATION OF PERIOD # 2.35 SEC*

*

7.35

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP REBISTANCE RELAY WAVE GAGE LOCATED AT JOHNNY MERCER PIER CALMS ARE OMITTED.

AVERAGE SIG. HEIGHT = 2.54 FT VARIANCE OF SIG. HEIGHT = 1.55 FT SQ STANDARD DEVIATION OF HEIGHT = 1.25 FT

AVERAGE MAVE PERIOD # 8.03 SEC*
VARIANCE OF WAVE PERIOD # 7.32 SEC 80*
STANDARD DEVIATION OF PERIOD # 2.71 SEC*

193 OBSE	RVATION	3	8	UMMARY	FOR	DEC 71	DEC 72					
PERIOD				SIG.	HEIG	HT (FT)	*					
(SECS)												
	0-1	1-2	2.3	3.4	4.5	5+6	6-7	7.8	8-0	TOT. *	CUM.	ROW AVG. •
0.09	0-1	146	2 4 3	,	443	,,,,	0.	, • 0		• • •		0.00
1.0 - 1.9												0.00
2.0 - 2.9												0.00
3.0 - 3.9		10	10	1.0						31		2.50
4.0 - 4.9		10	31	10		9				52		2.70
5.0 - 5.9		21	62	36	31		10			161		3.24
6.0 - 6.9		21	47	26	26	10	10			140		3.43
7.0 - 7.9		31	26	26	16	10				114		3.18
8.0 - 8.9		83	47	21	31	36	5	10		533		3.28
9.0 - 9.9		78	36	16	5	5	5		5	150		2.60
10.0 -10.9		31	36	16	5	5				93	119	2.61
11.0 -11.9											26	0.00
12.0 -12.9		21								21	56	1,50
13.0 -13.9											5	0.00
14.0 -14.9				5						5	5	3.50
TOTAL		306	295	161	114	73	36	10	5			3.03
CUM. TOTAL	1000	1000	694	399	238	124	52	16	5			
COL. AVG.	0.00	8.48	7.24	7.37	7.23	8.00	7.07	8.50	9.50	7.71		
AVERAGE SIG.	HEIGHT	2.9	7 FT			AVFRAGE						
VARIANCE OF S	IG. HEI	3HT =	2.11	FT 30		VARIANC					7 SEC	
STANDARD DEVI	ATION DI	HEIG	HT .	1.45 F	T	STANDAR	D DEVI	ATION	OF PER	100	2.07	SEC.

(SECS)				SIG.	HFIGH	T (FT)							
	0-1	1.2	2.5	3-4	4-5	5.6	6-7	7.8	8-9	9-10	101.	CUM.	ROW AVG
.09	0			-	•	,	•						0.00
.0 - 1.9												1000	
.0 - 2.9		4	1								4	1000	1.6
.0 . 3.9		10	1.6	5							34	996	2.3
.0 - 4.9		8	32	19	4	1					64	962	2.8
.0 - 5.9		27	62	44	55	1	1				158	898	2.9
.0 - 6.9	5	42	51	23	13	7	1				140		2.7
.0 - 7.9	1	35	34	14	10	3	3				100	600	2.7
.0 . 8.9	5	98	108	34	13	6	3	1	1	1	269	500	2.4
.0 - 9.9	4	38	30	12	3	5	1	1			99		2.3
.0 -10.9		59	27	6	5	1					65	135	5.5
.0 -11.9													0.0
.0 -12.9	1	16	18	5	1						42	66	5.5
.0 -13.9												24	0.0
.0 -14.9	1	6	7	3	1						17	24	5.5
.0 -15.9													0.0
.0 -16.9		5			1						5		2.8
.0 -17.9													0.0
.0 -18.9													0.0
.0 -19.9													0.0
.0 -20.9		1	1								3	3	1.8
•0 +													0.0
TAL	15	316	397	167	70	51	9	5	5	1			2,5
	1000	985	668	272	105	34	13	4	5	1			
M. TOTAL		8.27	7.67	7.14	7.16	7.63	7.69	8.50	8.30	8.50	7.77		

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN HITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT JOHNNY MERCER PIER

CALMS ARE OMITTED.


Table A-22. CERC wave gage history for Holden Beach Pier, Holden Beach, North Carolina.

		Pier Length (feet)	700								200					
	orth Carolina	Distance from seaward end of pier	0								0					
	en Beach, No	Water Depth (ft MSL)	15								15					
	LOCATION: Holden Beach Pier, Holden Beach, North Carolina	Gage Range (ft MSL)	-8 to +17								-6 to +19					
	Holden Be	Gage Length (feet)	25								25					
	LOCATION:	Explanation		3 July 1971 20 July 1971 Gage struck by lightning.	27 Aug. 1971 16 Oct. 1971 Gage struck by lightning.	6 July 1972 Gage struck by lightning.	5 Aug. 1972 Gage struck by lightning.	9 Aug. 1972 18 Sept. 1972 Gage struck by lightning.	Gage struck by lightning.	16 Mar. 1973 3 Sept. 1973 Gage damaged and badly rusted.	Continuous-wire staff 21 Nov. 1973 14 Dec. 1973 Signal cable cut by vandals.	16 Jan. 1974 2 May 1974 Gage struck by lightning.	8 June 1974 14 June 1974 Gage struck by lightning.	19 July 1974 30 July 1974 Gage struck by lightning.	Still operative as of 1 Mar. 1975	
	٨.	End of Proper Operation	9 June 1971	20 July 1971	16 Oct. 1971			18 Sept. 1972	17 Feb. 1973	3 Sept. 1973	14 Dec. 1973	2 May 1974	14 June 1974	30 July 1974		
47.4	55' N., 78°18' 1	Beginning of Proper Operation	5 Feb. 1971	13 July 1971	27 Aug. 1971	20 Oct. 1971	12 July 1972	9 Aug. 1972	27 Oct. 1972 17 Feb. 1973	16 Mar. 1973	21 Nov. 1973	16 Jan. 1974	8 June 1974	19 July 1974	28 Aug. 1974	
CERC Form 174-74 18 Mar 74	COURDINATES: 33°55' N., 78°18' W.	Type of Gage	Continuous-wire staff								Continuous-wire staff					


Table A-23. Number of analyzed digital records from Holden Beach, North Carolina. $^{\rm l}$

YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC	тот
1971				99	80	26	10	17	108	104	80	111	635
1972	102	105	82	99	87	118	75	94	68	16	113	93	1052
1973	90	53	48	56	56	48	60	89	9		35	17	561
1974	54	71	80	76		12	15		63	90	104	104	669
1975	94	66											

 $^{^{1}\}mathrm{From}$ 1,024-second records taken four times daily.

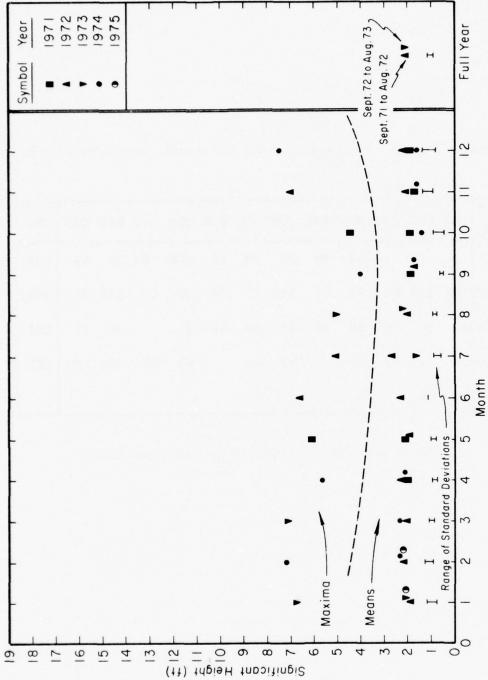


Maxima, means, and standard deviations of significant height from Holden Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily. Figure A-38.

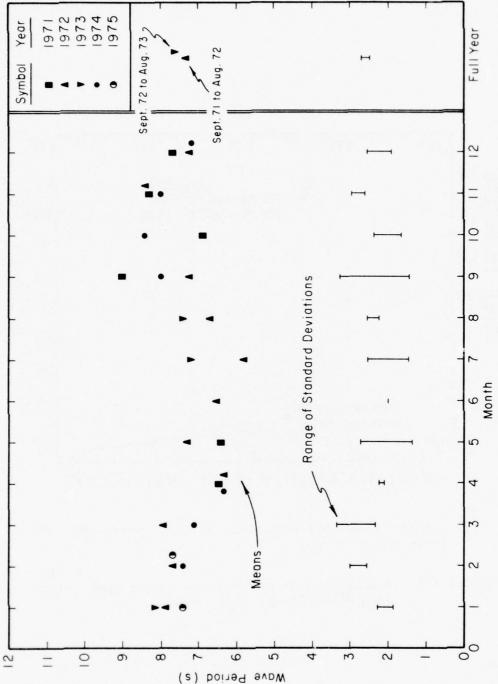

1,

Means and standard deviations of wave periods for Holden Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily. Figure A-39.

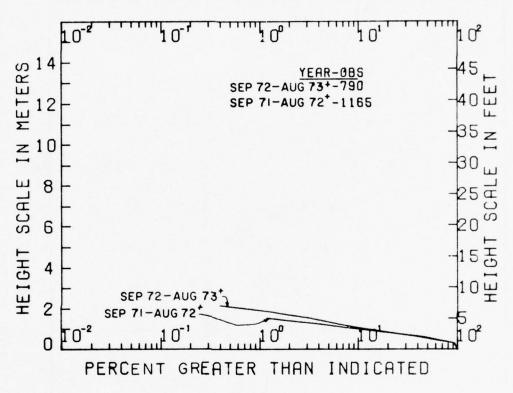


NOTE:

"

+ = computed from 1,024-second digital wave records taken four times daily.

Figure A-40. Annual cumulative significant height distributions from Holden Beach, North Carolina.

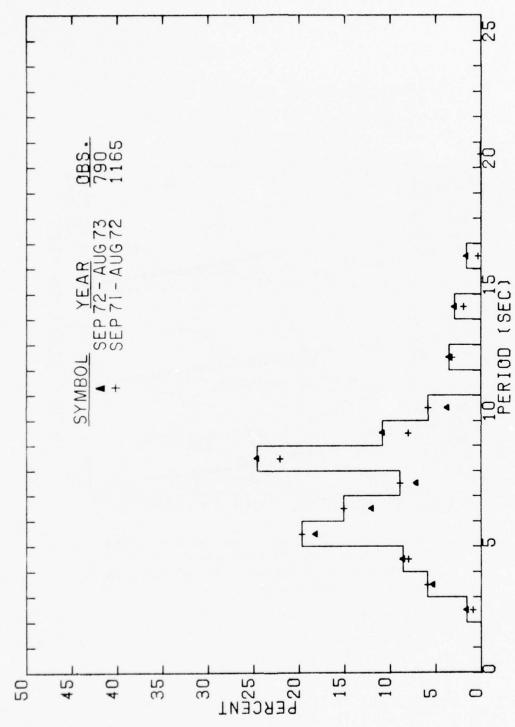

Annual significant period distributions from Holden Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily. Figure A-41.

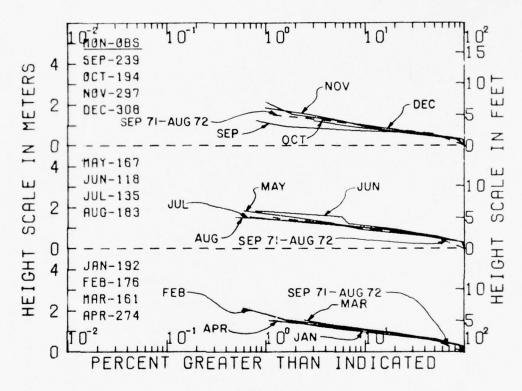


Figure A-42. Seasonal summaries of cumulative significant height distributions from Holden Beach, North Carolina; computed from 1,024-second digital wave records taken four times daily.

Table A-24. Wave climate for Holden Beach, North Carolina.

Distribution of significant height versus period (in observations per 1,000 observations).

192 0858	RVATION	5	5	UMMARY	FOR J	14N 72	JAN 7.	3		
PERIOD (SECS)				SIG.	HEIGH	(FT)				
(0000)										
	0-1	1.2	2.5	3-4	4.5	5=6	6-7	TOT	TOT.	AVG.
0.09									1000	0.00
1.0 . 1.9										0.00
2.0 - 2.9		5						5		1.50
3.0 . 3.9		26	10					56		1.79
4.0 - 4.9			10					10	958	2.50
5.0 . 5.9	5	68	47	15				141	948	2.04
6.0 - 6.9	10	36	78	26				151	807	2.29
7.0 - 7.9	10	21	52	16	5			104	656	2,35
8.0 . 8.9	26	120	73	16	10	5	5	255	552	2.11
9.0 - 9.9	16	78	26	5	10		5	135	297	1.96
0.0 -10.9	16	104	5					125	161	1.42
1.0 -11.9	•								36	0.00
2.0 -12.9		31						31	36	1.50
3.0 -13.9		٠.							5	0.00
4.0 -14.9		5						5	5	1.50
OTAL	8.5	495	302	83	21	5	10			2.02
UM, TOTAL	1000	917	422	120	36	16	10			
UL. AVG.	8.50	8.47	7.10	7.00	8.50	8.50	9.00	7.96		

AVERAGE SIG. HEIGHT # 1.98 FT AVERAGE HAVE PERIOD # 8.02 SEC*
VARIANCE OF SIG. HEIGHT # .97 FT SQ VARIANCE OF HAVE PERIOD # 4.33 SEC SQ*
STANDARD DEVIATION OF HEIGHT # .98 FT STANDARD DEVIATION OF PERIOD # 2.06 SEC*

RESULTS OBTAINED FHUM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT HÜLDEN BEACH PIEH.

CALMS ARE OMITTED.

(SECS)				SIG.	HF 1 GH	(T4) T					
										CUM.	
	0-1	1-5	5.2	3-4	4-5	5 - 6	6.7	7 - 8	TUT.*		
.0 . 9											0.00
.0 = 1.9											0.00
.0 - 2.9		8.5							58		1.50
.0 - 3.9	6	28	34						68		1.92
.0 - 4.9		85	34	1 1					74		2.27
.0 - 5.9	6	28	74	65	11				185		2.75
.0 . 6.9		34	40	6	6				85		2.30
.0 - 7.9		40	17	53					80		5.54
.0 - 8.9		108	34	23	6	6			176		2.18
.0 . 9.9	6	80	34	11	53			6	159	307	2.46
.0 -10.9	17	57	11	6		6			97	148	1.79
.0 -11.9											0.00
9.51- 0.	6	17							23	51	1.25
.0 -13.9										28	0.00
.0 -14.9	11	6	6						23	28	1.25
.0 -15.9										6	0.00
.0 -16.9					6				6	6	4.50
TAL	51	455	284	142	51	11		6			2.25
M. TOTAL	1000	949	494	210	68	17	6	6			
L. AVG.	10.17*	7.79	6.62	6.78	8.94	9.50	0.00	9.50	7.52		
				-		-					

165

SUMMARY FOR MAR 72 MAR 74 161 OBSERVATIONS PERIOD SIG. HEIGHT (FT) (SEC5) 5.6 TUT. * TOT. * AVG. * 1000 0.00 2-3 3-4 4.5 0.0 - .9 1.0 - 1.9 2.0 - 2.9 5.0 - 3.9 5.0 - 5.9 5.0 - 5.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL 0-1 1=2 0.00 1000 0.00 1000 0.00 1000 1.50 988 1.58 913 2.76 671 2.66 671 2.66 516 2.36 429 2.18 273 2.15 155 1.06 57 0.00 57 1.50 12 75 118 124 155 87 155 118 118 12 19 25 61 75 37 43 50 25 25 37 6 25 19 6 12 51 62 50 50 6 6 19 19 0.00 71.5 91 2.20 106 354 1000 894 8397* 7.69 19 124 360 540 6,67 25 25 8.00

AVEHAGE SIG, HEIGHT # 2.19 FT VARIANCE OF SIG, HEIGHT # .96 FT SU STANDARD DEVIATION OF HEIGHT # .98 FT AVERAGE WAVE PERIOD # 7,40 SEC*
VARIANCE OF WAVE PERIOD # 6,43 SEC 84*
STANDARD DEVIATION OF PERIOD # 2,54 SEC*

MESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE MAYE GAGE LOCATED AT MULDEN BEACH PIER,
* CALMS ARE OMITTED.

. 274 OBSERVATIONS SUMMARY FOR APR 71 APR 72 APR 74 PERIOD SIG. HEIGHT (FT) (SECS) CUM. RUM TOT.* AYG.* 1000 0.00 1000 1.50 967 2.03 843 2.61 715 2.55 511 2.35 365 1.98 288 1.85 102 2.00 44 1.63 15 0.00 15 1.50 2.18 0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 TOTAL CUM. TOTAL COL, AVG. 5.6 TUT, # 3-4 4-5 0=1 1=2 203 33 58 26 66 62 40 33 124 128 204 146 77 186 58 66 73 77 33 15 29 15 11 18 40 22 15 26 7 11 7 15 36 15 40 474 1000 960 7.68* 6.78 307 485 5,51 131 179 6,69 6.36 AVERAGE SIG. HEIGHT # 2.14 FT VARIANCE UF SIG. HEIGHT # .82 FT SQ STANDARD DEVIATION OF HEIGHT # .91 F AVERAGE WAVE PERIOD # 6.38 SEC#
VARIANCE OF WAVE PERIOD # 4.72 SEC SQ*
STANDARD DEVIATION OF PERIOD # 2.17 SEC#

.91 FT

Delical Control of the Section of the Control of the Section of th

167 0855	RVATION	•	3	UMMAHY	FOR M	AY 71	MAY 7	2		
PEHIOD (SECS)				816.	HEIGH	T (FT)				
	0-1	1=2	205	3.4	4.5	5=6	6-7	101.	CU*:	HUR.
0.09									1000	0.00
1.0 - 1.9									1000	0.00
5.0 - 5.6		18	6					24	1000	1.75
3.0 - 3.9		78	54					135	976	1.91
4.0 - 4.9	6	15	15					30	844	1.70
5.0 - 5.9	6	66	114	6				192	814	2.15
6.0 - 6.9	6	54	54	15	12			108	952	
7.0 - 7.9		78	24	6				108	515	1.85
8.0 . 8.9	6	210	48	24	10	15	6	353	407	2.19
9.0 . 9.9	6	72						78	64	1.46
10.0 -10.9									6	0.00
11.0 -11.9									6	0.00
12.0 -12.9									6	0.00
13.0 -15.9									6	0.00
14.0 -14.9									6	0.00
15.0 -15.9									6	0.00
16.0 -16.9									6	0.00
17.0 -17.9									6	0.00
18.0 -18.9									6	0.00
19.0 -19.9									6	0.00
20.0 -20.9			6					6	6	2.50
51.0 +			•							0.00
TOTAL	50	587	287	48	30	12	6			2.02
CUM. TOTAL	1000	970	385	96	48	18	6			
							8,50	0.85		
COL, AVG.	6.90	7.04	6.08	7.50	7.70	8.50	0,00			

AVERAGE SIG, HEIGHT # 2.01 FT AVERAGE HAVE PERIOD # 6.88 SEC*
VARIANCE OF SIG. HEIGHT # .89 FT STANDARD DEVIATION OF HEIGHT # .89 FT STANDARD DEVIATION OF PERIOD # 2.18 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS MIRE MAYE GAGE LOCATED AT MOLDEN BEACH PIER,

CALMS ARE DMITTED.

(SECS)				•	HE I GH					
	0-1	1.2	5-7	3.4	4=5	5=6	6=7	101.0	CUM.	
9. * 0.0									1000	0.00
.0 . 1.9									1000	0.00
9.5 = 0.5		8						- 6		1.50
3.0 - 3.9		76	8					85		1.60
4.0 . 4.9		42	34	25				105		2.33
5.0 . 5.9		76	144	7.6		8		305	805	2.58
0.0 # 6.9		85	34	8	6	17		153		2.44
7:0 = 7.9		42	17	8		8		76	347	2.39
8.0 - 8.9	17	127	8	25		8	8	195	271	2.11
7.0 - 9.9		34	8			8		51	76	2,55
0.0 #10.9				8				8	25	3.50
1.0 -11.9									17	0.00
9.51- 0.5		8						8	17	1.50
3.0 -13.9									8	0.00
.0 -14.9		8						8	8	1.50
TAL	17	508	254	153	8	51	8			2.31
JH. TOTAL	1000	983	475	550	68	59	8			
L. AVG.	8,50*	6,68	5.80	6.28	6,50	7.33	8,50	6.47		
ERAGE SIG. H	EIGHT #	2.2	8 FT		A	VERAGE	MAVE	PERIOD		SI SEC*

AVERAGE SIG, HEIGHT # 2.01 FT AVERAGE MAVE PERIOD # 6.88 SEC*
VARIANCE OF SIG. HEIGHT # .89 FT STANDARD DEVIATION OF HEIGHT # .89 FT STANDARD DEVIATION OF PERIOD # 2.18 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE MAYE GAGE LOCATED AT HOLDEN BEACH PIER.

* CALMS ARE OMITTED.

						_								
		1 1	8	OBSE	HVATION	S	8	UMMARY	FOH J	UN 72				
	PE	R	00					316.	HEIGH	T (FT)				
		SEC												
													CUM.	HUN
					0-1	1.5	5.7	3 = 4	4 . 5	5.6	6 - 7	TUT. *	101.	AVG
	0.0		,	9										0.00
	1.0		1.	9									1000	0.00
	2.0	*	2.	9		8						8	1000	1.50
	3.0		5 .	9		76	8					85		1.60
	4.0					42	34	25				102		2.33
	5.0		5.	9		76	144	76		8		505	805	2.58
	6.0	*	6	9		85	34	8	8	17 8 8		153	500	2.44
	7 . 0		1.	9		47	1.7	8 25		8		76		2.39
	8.0		8.	9	17	127	8 8	25		8	8	195		2.11
	9.0	*	9 ,	9		34	8			8		51		2.35
- 8	0.0	*	0 .	9				8				8		3.50
1	1.0	- 1	1 .	9										0.00
- 3	12.0	*	2.	9		8						8		1.50
	3.0												. 8	0.00
	4.0	- 1	4 .	9		B						8		1.50
	OTAL				17	508	254	153	8	51	8			2.31
(UM.	10	TA	L	1000	983	475	055	68	59	8			
	OL.				8.50*	6,68	5.80	6.28	6,50	7.33	8.50	6.47		

AVERAGE SIG, HEIGHT # 2,28 FT

YAMIANCE OF SIG, HEIGHT # 1,29 FT SO

\$TANDARD DEVIATION OF HEIGHT # 1,15 FT

AVERAGE HAVE PERIOD # 6,51 SEC*

VARIANCE OF HAVE PERIOD # 3,94 SEC SQ*

\$TANDARD DEVIATION OF HEIGHT # 1,15 FT

STANDARD DEVIATION OF HEIGHT # 1,99 SEC*

100

30

1,

AVERAGE SIG, HEIGHT = 2.20 FT

VARIANCE OF SIG, HEIGHT = .78 FT SG

STANDARD DEVIATION OF HEIGHT = .89 FT

AVERAGE MAVE PERIOD = 6.42 SEC*

VARIANCE OF MAVE PERIOD = 4.45 SEC SQ*

STANDARD DEVIATION OF PERIOD = 2.11 SEC*

RESULTS OBTAINED FROM 1024-Secund digital records taken with a continuous wire wave gage located at hulden beach pier.

* Calms are omitted.

183 OBSERVAT	IONS	s	UMMARY	FOR A	UG 72	AUG 73		
PERIOD			816.	HEIGH	T (FT)			
(SECS)								
							cus.	HUM
0	1-2	2 . 3	3.4	4-5	5-6	TUT	TUT.	AVG
0.09		-					1000	0.00
1.0 - 1.9							1000	0.00
2.0 - 2.9	5					5	1000	1.50
3.0 - 3.9	27	55	5			55	995	2.10
4.0 - 4.9	5.5	60	53	5		120	940	2.68
5.0 - 5.9	55	115	49	55		240	820	2.66
5.0 × 5.9	49	55	27	5	5	109	519	2.55
7.0 - 7.9	49	11	5			66	470	1.85
8.0 - 8.9	202	27		5		245	404	1.65
9.0 - 9.4	55					55	109	1.50
10.0 -10.9	5.5					55	55	1.50
11.0 -11.9							33	0.00
12.0 -12.9	11					11	33	1.50
13.0 -13.9							55	0.00
14.0 -14.9							55	
15.0 -15.9							55	0.00
10.0 -10.9	5.5					55	5.5	1.50
TOTAL	579	257	150	38	5			2.15
	000 1000	421	164	44				
COL. AVG. 0.	00* 8.07	3.59	5.45	5.93	6.50	7.02		

AVERAGE SIG, HEIGHT # 2,10 PT AVERAGE MAVE PENIOD # 7,00 SEC*
VARIANCE OF SIG, HEIGHT # ,71 FT 80 VARIANCE OF MAVE PENIOD # 5,81 SEC 80*
BTANDARD DEVIATION OF MEIGHT # ,85 FT STANDARD DEVIATION OF PERIOD # 2,41 SEC*

AVERAGE SIG. HEIGHT = 1.77 FT AVERAGE HAVE PERIOD = 8.24 SEC*
VARIANCE OF MAYE PERIOD = 7.37 SEC 80*
STANDARD DEVIATION OF HEIGHT = .52 FT STANDARD DEVIATION OF PERIOD = 2.72 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT HOLDEN BEACH PIER,

* CALMS ARE OMITTED.

194 085	FRVATION	S	8	UMMARY	FOR C	CT 71	OCT 74	
PERIOD (SECS)				516.	HE 1GH	(T () T)		
							CUM.	HUM
	0-1	1-2	2 . 3	3-4	4.5	TUT.	TUT	AVG
0.09							1000	0.00
1.0 - 1.9							1000	0.00
2.0 - 2.9		15				21	1000	1.50
3.0 - 3.9		15				21		1.50
4.0 - 4.9		21	26			46	959	2.06
5.0 - 5.9	26	57	56	15		134	912	1.81
6.0 - 6.9	26	119	46		15	506	778	1.83
7.0 - 7.9	10	46	21	10	•	88		1.85
8.0 - 8.9	36	180	62	10	10	299		1.76
9.0 - 9.9	15	57	5	10	5	93	186	1.78
0.0 -10.9	-	36	10			46	93	1.72
1.0 -11.9			•					0.00
2.0 -12.9	15	15				31		1.00
3.0 -15.9		•						0.00
4.0 -14.9		15				15		1.50
TOTAL	129	588	206	46	31			1.76
UM. TOTAL	1000		284	17	31			
OL. AVG.	8.02*		7.05	7.50	7.67	7.59		

AVERAGE SIG. HEIGHT # 1.65 FT
VAHIANCE OF SIG. HEIGHT # .57 FT SU
STANDARD DEVIATION UF HEIGHT # .76 FT
STANDARD DEVIATION UF HEIGHT # .76 FT
STANDARD DEVIATION OF PERIOD # 2.19 SEC6

AVEHAGE SIG, HEIGHT = 1.80 FT VARIANCE OF SIG, HEIGHT = 1.18 FT SQ STANDARD DEVIATION OF HEIGHT = 1.09 FT AVERAGE MAVE PERIOD = 8.22 SEC*
VARIANCE OF WAVE PERIOD = 7.76 SEC SU*
STANDARD DEVIATION OF PERIOD = 2.79 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE MAYE GAGE LOCATED AT HULDEN BEACH PIER.

CALMS ARE OMITTED.

104

SOB UBSERVATIONS SUMMARY FOR DEC 71 DEC 72 DEC 74 PEHIOD SIG. HEIGHT (PT) (SECS) CUM. HUN TUT. . AVG. . 7-8 101. 0.0 - .9 1.0 - 1.9 2.0 - 2.9 5.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL CUM. TOTAL 0-1 1.5 5=6 26 1000 0.00 1000 0.00 56 1000 .83 10 13 42 75 52 26 13 63 173 183 990 1.70 957 1.82 873 1.67 700 2.12 517 2.13 453 2.20 210 1.78 90 2.33 52 42 32 3 25 243 19 120 26 120 30 0.00 10 10 0.00 6 3 185 445 1000 815 7.48* 7.56 10 81 133 7.18 10 19 9.17 237 10 COL. AVG. 6,66 0.00 9.17

AVERAGE SIG. HEIGHT # 1.89 FT VARIANCE UP SIG. HEIGHT # 1.29 FT SQ STANDARD DEVIATION OF HEIGHT # 1.14 FT AVERAGE MAVE PERIOD # 7.40 BFC*
VARIANCE OF WAVE PERIOD # 4.69 SEC SU*
STANDARD DEVIATION OF PERIOD # 2.16 SEC*

100

THE RESERVE OF THE PARTY OF THE

SUMMARY FOR 27 MONTHS APR 71 THROUGH DEC 74 2444 OBSERVATIONS PERIOD SIG. HEIGHT (FT) (SECS) 7-8 TUT. * TUT. . AVG. . 0-1 1-2 2 - 5 3-4 TUT. AVG. 1
1000 0.00
1000 1.53
986 1.90
922 2.40
844 2.34
662 2.20
525 2.01
447 1.90
206 1.85 0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
8.0 - 8.9
9.0 - 9.9
11.0 - 11.9
12.0 - 12.9
13.0 - 15.9
14.0 - 14.9
15.0 - 15.9
16.0 - 16.9
17.0 - 17.9
18.0 - 18.9
19.0 - 19.9
21.0 + TOTAL
COM. TOTAL 12 33 21 59 62 43 149 63 1 27 43 73 35 22 41 14 7 65 11 29 19 8 15 4 2 1 11 10 4 23 182 2 1 4 156 241 98 55 1 53 0.00 53 1.50 22 0.00 22 1.55 31 23 13 3 18 4 0.00 4 1.79 1 0.00 3 2 1 0.00 0.00 1 81 516 1000 919 8.24* 7.85 403 89 134 6,52 11 16 7.79 AVERAGE SIG. HEIGHT # 1.99 FT VARIANCE OF SIG. HEIGHT # .99 FT SQ STANDARD DEVIATION OF HEIGHT # .97 FT AVERAGE MAVE PERIOD = 7.38 SEC*
VARIANCE OF MAVE PERIOD = 6.07 SEC SQ*
STANDARD DEVIATION OF PERIOD = 2.46 SEC*

"

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT HULDEN BEACH PIER.

CALMS ARE OMITTED.

WHITE THE PERSON WE SEE TO SEE THE


Table A-25. CERC wave gage history for Savannah Coast Guard Light Tower, Savannah, Georgia.

	orgia	ce Pier ward Length ier (feet)	of Tower is 9 nmi from shore							
	Savannah, Ge	Distance from seaward end of pier	On east side of tower							
	ght Tower, S	Water Depth (ft MSL)	52							
	LOCATION: Savannah Coast Guard Light Tower, Savannah, Georgia	Gage Range (ft MSL)	-15 to +20							
	Savannah (Gage Length (feet)	35							
	LOCATION:	Explanation	Power off.	17 Feb. 1972 20 Oct. 1972 Gage broken loose.	14 Jan. 1973 30 July 1973 Gage broken loose.	28 Aug. 1973 8 Oct. 1973 Antenna cable damaged by vandals.	19 Nov. 1973 10 June 1974 Gage broken loose.	9 Aug. 1974 Amplifier damaged.	8 Jan. 1975 31 Jan. 1975 Gage discontinued.	
	۷.	End of Proper Operation	5 Dec. 1971 Power off.	20 Oct. 1972	30 July 1973	8 Oct. 1973	10 June 1974	9 Aug. 1974	31 Jan. 1975	
4.	57' N., 80°41' V	Beginning of Proper Operation	8 Apr. 1971	17 Feb. 1972	14 Jan. 1973	28 Aug. 1973	19 Nov. 1973	17 July 1974	8 Jan. 1975	
CERC Form 174-74 18 Mar 74	CODRDINATES: 31°57' N., 80°41' W.	Type of Gage	Continuous-wire staff							

Table A-26. Number of analyzed digital records from Savannah Light Tower, Georgia. $^{\rm l}$

YR YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1971				76	104	89	83	124	117	119	86		798
1972			109	108	121	112	71	82	107	65			775
1973	52	89	108	4 1	68	70	65	16	82	29	31	40	691
1974	97	100	82	62	96	18	32						487

¹From 1,024-second records taken four times daily.

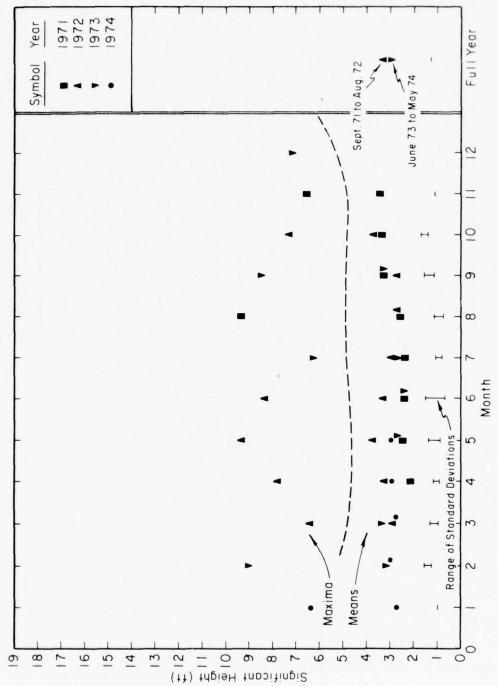

1

The state of the

Maxima, means, and standard deviations of significant height from Savannah Light Tower, Georgia; computed from 1,024-second digital wave records taken four times daily. Figure A-43.


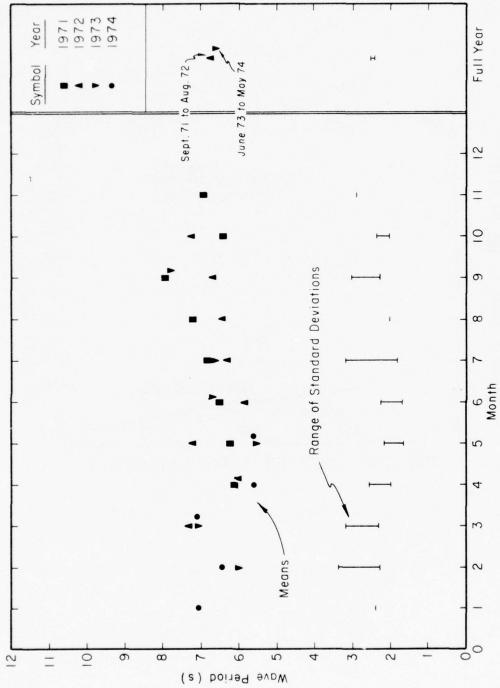



Figure A-44. Means and Standard deviations of wave periods for Savannah Light Tower, Georgia; computed from 1,024-second digital wave records taken four times daily.

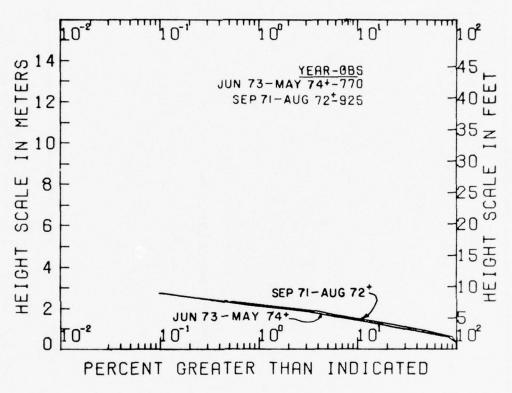


NOTE:

+ = computed from 1,024-second digital wave records taken four times daily.

Figure A-45. Annual cumulative significant height distributions from Savannah Light Tower, Georgia.

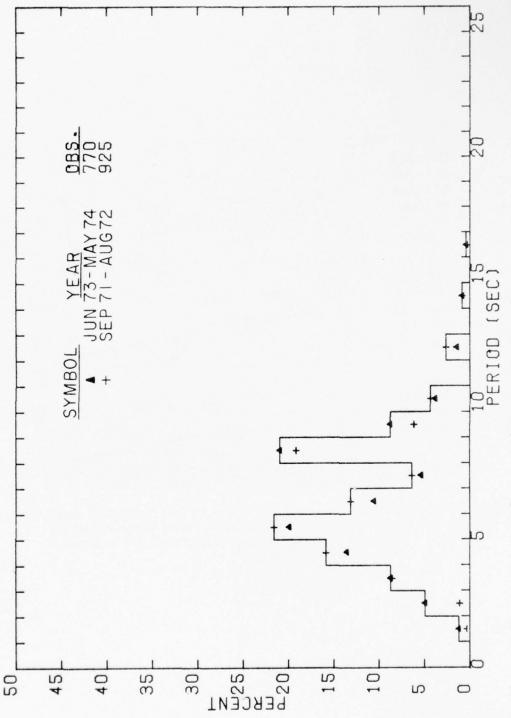

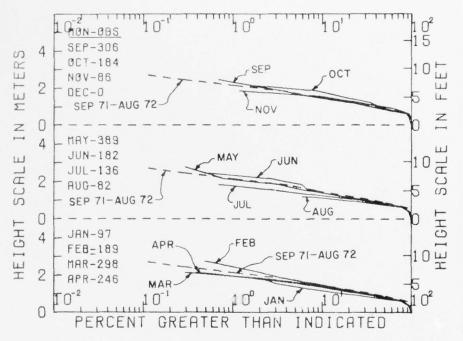

100

7,

Figure A-47. Seasonal summaries of cumulative significant height distributions from Savannah Light Tower, Georgia; computed from 1,024-second digital wave records taken four times daily.

Table A-27. Wave climate for Savannah, Georgia.

Distribution of significant height versus period (in observations per 1,000 observations).

	9	7	08	88	RV	A 1	1	DN	3						8	MM	AR	¥.	F 1	OR	J	AN	7	4															
PE (8	RI															8	10		H	EIG	н	۲	(#	T)															
																										1277									101				
						(, *	1		1	. 5		2	-)	ž.)	= 4			4 = 5	,		5*	6			. 7	1	V I	. *									
0.0														10																21			00						
1.0											10			65																82			79						
2.0											æ 1			10																									
3.0											2.																			10			97						
4.0										10	21			21			10			51													87						
5.0														41			62			31			1	0			21			65			14						
6.0											31			52			52													34			49						
7.0														41			10													52			15						
8.0											52			44			31													27			64						
9.0											65			154			10)											1	96			37						
0.0	-1	0	9								21			51																41			41						
OTAL											16			326			75			52			1				21							5	2 . 6	8			
UM.							0				00			184		5	158	5		82			3				21												
OL.	AV	G,				0 ,	, 0	0 *	1	1.	40		7.	21		6,	62	,	5	.10)	5	. 5	0	5	, '	50		6,	98									
VERA	GF		110		нЕ	TO	н	т			,	70	,	7 7								VE	R A	GF			F	P	r R	101			9	. 6	7	.,			
ARIA	NC		0 5	. 8	TG		н	EI	GF	HT		, .		Q	A	F 1	8	0																				SEC	ar
TAND																																						.41	
																																		•	0.5				
EBUL	13	. (BT	AI	NE	ō	F	RC	M	1	50	4 .	8 1	CO	NO	0	IG	IT	A	LP		0	RD	8	TA	K	EN	W	7	H	A (0	NT	IN	UO	US	111	RE	

RESULTS OBTAINED FROM 1024=SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE MAYE GAGE LOCATED AT SAVANNAH LIGHT TOMER,

* CALMS ARE OMITTED.

189 0882	RVATION	8	8	UMMARY	FOR F	EB 73	FEB 74							
PERIOD				810.	HEIGH	(FT)								
(8808)														
												CUM.	ROW	
	0=1	1=2	2=3	3=4	4=5	5 . 6	6=7	708	8 . 9	9-10	TOT. #		AYG	
0.09			-										0.00	
1.0 = 1.9			5								5	1000	2,50	
2.0 = 2.9"		21	37								58	995	2.14	
3.0 = 3.9	5	48	138	42							233	937	2,43	
4.0 = 4.9			3.7	53	16	5					111	704	3.40	
5.0 = 5.9			21	53	42	26		5			148	593	4.14	
6.0 = 6.9		5	11	48	32	5		11			116	444	4.18	
7.0 = 7.9			1.1	51		5					37	328	3.50	
8.0 . 8.9		39	42	5	11	9	5			9	111			
9.0 = 9.9		53	42								95	150	1.94	
10.0 = 10.9		1.6	11	16			5				48	85	2.94	
11.0 -11.9												37	0.00	
12.0 -12.9			11								11	37	2.50	
13.0 =13.9												26	0.00	
14.0 -14.9		5		- 5							11	26		
15.0 -15.9												16		
16.0 -16.9		5	5		5						16	16	2.63	
TOTAL	5	190	370	243	100	48	16	16		5			3.08	
CUM, TOTAL	1000	999	804	434	190	85	37	21	5	5				
COL. AVG.	3.50*	7.36	5.69	5.89	50	6.03	8.50	6.17	0.00	8.50	6,21			
AVERAGE SIG.	HEIGHT		4 #1			VERAGE	WAVE	PERTOD		25 BE				
VARIANCE OF S	IG. HEI	GHT .	1.88	FT 80	1	ARIANC		AVE PE		A	338 Sec	898		
STANDARD DEVI	ATION O	F HEIG	HTB	1.37 #	7 1	TANDAR	D DEVI	ATION	OF PER	100 #	2.94	BEC.		

297 ORSE	RVATION	5	5	UMMARY	FOR M	AR 72	MAR 73	MAR 7	4	
PERIOD				516.	HFIGH	T (FT)				
(SECS)										
									CUM.	ROW
	0=1	1-2	2 - 3	3-4	4-5	5=6	6-7	TOT	TOT	AVG
0.09									1000	0.00
1.0 - 1.9		7	3 7					10	1000	1.83
2.0 - 2.9		3 3 17	7					10	990	2.17
3.0 - 3.9		3	27	37	3			71	980	3.07
4.0 - 4.9		17	57	44	17	3	3	141	909	3.10
5.0 - 5.9		7	81	74	44	24	7	536	768	3.57
6.0 - 6.9		3	10	10	17	10		51	532	3.90
7.0 - 7.9		3 7	13	13	10	3	3	51	481	3.50
8.0 - 8.9		67	118	13	7	3	3	515	431	2.42
9.0 - 9.9	3	34	57	10				104	219	2.21
10.0 -10.9		20	30	13				64	114	2.39
11.0 -11.9									51	0.00
12.0 -12.9			17	10				27	51	2.88
13.0 -13.9									24	0.00
14.0 -14.9			3	13	3	3		24	24	3.79
TOTAL	3	164	424	239	101	47	17			2.97
CUM. TOTAL	1000	997	BSB	404	165	64	17			
COL. AVG.	9.50*	7.84	7.33	6,58	6.13	6.64	6.30	7.07		

AVERAGE SIG HEIGHT = 2.98 FT

VARIANCE OF SIG, HEIGHT = 1.19 FT SQ

STANDARD DEVIATION UF HEIGHT = 1.09 FT

STANDARD DEVIATION UF HEIGHT = 1.09 FT

STANDARD DEVIATION OF PERIOD = 2.62 SEC

RESULTS OBTAINED FHOM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS MIRE HAVE GAGE LOCATED AT SAVANNAH LIGHT TOWER.

* CALMS ARE OMITTED.

PERIOD				SIG.	HEIGH	T (FT)					
(8228)											
										cum.	ROW
	0-1	1 . 2	2.3	3-4	4.5	5 . 6	6.7	7 . 8	TOT. *	TOT	
.09										1000	0.00
.0 - 1.9				4					4	1000	3.50
.0 . 2.9		33	8	4					93	996	1.65
.0 . 3.9		20	73	16	8				118	943	2.60
.0 - 4.9		41	81	65	20				207	825	2.81
.0 . 5.9	4		65	73	41	37	8		228	618	3.77
.0 . 6.9	8	20	20	28	12		4	4	98		3.04
.0 - 7.9		12	3.5	4	4	4			53	293	2.73
.0 . 8.9	4	65	69	50	4				163	240	2.23
.0 . 9.9		16	16						33	77	2.00
.0 -10.9		4	20	4					28	45	2.50
.0 -11.9										16	0.00
.0 -12.9			8	4					12		2.83
.0 -13.9									•		0.00
.0 -14.9			4						4		2.50
TAL	24	211	394	224	89	41	12	4			2.83
M. TOTAL	1000	976	764	370	146	57	16	4			
L. AVG.	5,33*	6,19	6,24	5,59	5.45	5.70	5.83	6.50	5.97		
ERAGE SIG. H	FIGHT					VERAGE	HAVE	PERIOD		95 SEC	
RIANCE OF SI				FT 80		ARIANC					. SEC 8

389 OBSERVATIONS BUMMARY FOR MAY 7: MAY 72 MAY 73 MAY 74 PERIOD (SECS) SIG. HEIGHT (FT) ---- CUM. RON 4-5 5-1 2-3 3-4 5-6 TOT. AVG. 1000 0.00 1000 0.00 1.92 969 2.35 864 3.01 3.55 3.86 463 3.31 355 3.68 293 2.74 15 3.00 3.02 0.0 = .9 1.0 = 1.9 2.0 = 2.9 3.0 = 3.9 4.0 = u.9 5.0 = 5.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.0 10.0 = 10.9 TOTAL CUM, TOTAL COL, AVG. 31 105 185 216 108 62 203 75 21 28 21 8 28 5 33 26 3 13 67 85 18 18 21 15 64 77 49 28 28 121 33 10 419 830 6.46 3 13 8 3 5 18 15 18 18 23 105 170 170 1000 1000 0.00* 6.11 242 31 AVERAGE SIG. HEIGHT = 5.01 FT VARIANCE OF SIG. HEIGHT = 1.46 FT SG STANDARD DEVIATION OF HEIGHT = 1.21 FT AVERAGE MAVE PERIOD # 6.25 SEC*
VARIANCE OF MAVE PERIOD # 4.14 SEC 80*
STANDARD DEVIATION OF PERIOD # 2.03 SEC*

REBULTS OBTAINED FROM 1024-BECOND DIGITAL RECORDS TAKEN MITH A CONTINUOUS WIRE MAYE GAGE LOCATED AT SAVANNAH LIGHT TOMFR,

CALMS ARE OMITTED.

271 URSER	VATIONS	9	5	UMM 4 4	FOR J	11N 71	JUN 72	JUN 7	3			
PERÍOD (SECS)				\$16.	HF I GH	T (FT)						
			2-3	3-4	4=5	5=6	6=7	7-8	A-9	101.4	CUM. TOT. •	
	0-1	1-5	>- 1	,,,,	4-5	5-0	0-1	1-0	n- •			0.00
0.09			n.	а						7		3.00
1.0 - 1.9		- 4	4	4						15		2.25
2.0 - 2.9			11	55	4					122		2.62
3.0 - 3.9		15	81	59	22					181		3.03
4.0 - 4.9		,	100	41	26	4	15	0		196		3.39
5.0 - 5.9		22	41	26	7		15	7	4	114		3.44
7.0 - 7.9		55	33	- 4	,			,		59		2.19
8.0 - 8.9	4	133	66	-	18	4		4		550		2.18
9.0 - 9.9	•	30	37	7						74		2.20
10.0 -10.9		4	3,							u		1.50
TOTAL	u	244	465	162	77	7	55	15	4			2.77
CUM. TOTAL	1000	996	753	288		48	41	1.8	4			
COL. AVG.	8.50	7.77	5.83	5.16	5.93	7.00	5.83	6.75	6.50	6,23		
AUEDACE **** U	ETCHT .					VEDAGE	WAVE	PERIOD		26 SEC		
AVERAGE SIG. H	C WET	CHT	7 . 47	FT 90	. 0	ARTANC	F 05 W	AVE PE	RIDD .	4.1	8 SEC	80.
STANDARD DEVIA	TION OF	E METO	WT .	. 2. 5		TANDAR	D DEVI	ATION	OF PER	100 .	2.04	SEC.

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT SAVANNAH LIGHT TOMPR.

* CALMS ARE OMITTED.

was the sale of the real of the sale of th

AVERAGE SIG HEIGHT # 2.66 FT AVERAGE HAVE PERIOD # 6.60 SEC*
VARIANCE OF SIG. HEIGHT # .95 FT SG VARIANCE OF HAVE PERIOD # 6.79 SEC SG*
STANDARD DEVIATION OF MEIGHT # .93 FT STANDARD DEVIATION OF PERIOD # 2.61 SEC*

RESULTS OBTAINED FROM 1028-5ECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE HAVE GAGE LOCATED AT SAVANNAH LIGHT TOWER.

* CALMS ARE OMITTED.

206 0	BSERVATIONS	3	5	UMMARY	FOR AU	G 71	AUG 72			
PERIOD (SECS)				SIG.	HFIGHT	(FT)				
	0 = 1	1-2	2-3	3-4	4=5	5=6	6-7	101.*	TOT. =	ROW AVG.* 0.00
1.0 = 1.9			5					5	1000	2.50
3.0 - 3.9		5	73 78	15	1.0	5		92	995	2.76
5.0 - 5.9		1.5	53	58	34	5	5	170	772	3,36
7.0 = 7.9		54	39	15	5			92		2.82
8.0 - 8.9		124	170	10				306		2.12
10.0 -10.9		10	15	5	10			29	34	3.33
11.0 -11.9			5					5		2.50
TOTAL CUM. TOTAL	1000	1000	772	160	58 78	19	10			2.63
COL. AVG.	0.00*	7.54	6.82	6.53	6.25	5.00	5.50	6.88		

AVERAGE SIG, HEIGHT # 2.63 FT AVERAGE HAVE PERIOD # 6.90 SEC# VARIANCE OF SIG, HEIGHT # .92 FT SO VARIANCE OF MAVE PERIOD # 4.29 SEC SQ# STANDARD DEVIATION OF HEIGHT # .96 FT STANDARD DEVIATION OF PERIOD # 2.07 SEC#

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GACE LOCATED AT SAVANNAH LIGHT TOWER.

* CALMS ARE OMITTED.

7

	0-1	1-2	2-3	3-4	4-5	5=+	6=7	7 • 8	8=9	101.		
0.09												0.00
1.0 - 1.9		3	3							7		5.00
2.0 - 2.9		3	3							. 7	993	2.00
3.0 - 3.9		7	52	10	3					72	987	2.64
4.0 - 4.9		10	19	49	16		3			110	915	25.5
5.0 - 5.9		10	39	49	52	26	3			180	797	3.81
6.0 - 6.9		16	23	26	20	16	10	7	7	124	618	4.18
7.0 - 7.9		10	15	7	3		1			36		2.95
8.0 - 8.9		33	98	33	23			3	* ***	190	458	2.63
9.0 - 9.9		56	75	,	7				, ,	111		2.38
10.0 -10.9			46	7	í					99		2.67
11.0 -11.9					-							0.00
12.0 -12.9		3	46	13	10					72		
13.0 -13.9		,	40	13	10							0.00
			3.0	,						26		2.75
14.0 -14.9 TOTAL			20	304	. 3.0		30			2.0		3.14
		124	498	504	134	42	50	10				
CUM. TOTAL	1000	1000	876	418	515	78	36	16	7			
COL. AVG.	0.00*	7.37	8,13	6.85	.77	5.88	.17	7.17	6,50	7,43		

AVERAGE SIG. HEIGHT = 3.07 FT AVERAGE HAVE PERIOD = 7.48 SEC*
VARIANCE OF SIG. HEIGHT = 1.65 FT SG VARIANCE OF WAVE PERIOD = 7.56 SEC SQ*
STANDARD DEVIATION OF HEIGHT = 1.27 FT STANDARD DEVIATION OF PERIOD = 2.75 SEC*

RESULTS OBTAINED FROM 1024-8ECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE MAYE GAGE LOCATED AT BAVANNAM LIGHT TOWER.

9 CALMS ARE OMITTED.

PERIOD				SIG.	HEIGH	T (FT)					
(SECS)											
										CUM.	ROM
	0-1	1-2	2.3	3-4	4.5	5.6	6-7	7 . 8	TOT . *	TOT	
.09			-							1000	0.00
.0 - 1.9				5					5	1000	3,50
.0 . 2.9			5						5	995	2.50
.0 . 3.9		5	43	16					65	989	2.67
.0 . 4.9			92	43					141		2.77
.0 . 5.9			11	33	98	54	5.5	5	552		4.77
.0 . 6.9		5	38	16	6.5	33	38	5	201		4.58
.0 . 7.9		5	5	5			11	5	33		4.67
.0 . 8.9		3.3	125	11	11				179		2.50
.0 . 9.9		5	38						43		2,38
.0 -10.9		2.2	71						9.2		2.26
.0 -11.9											0.00
.0 -12.9			5						5	11	2.50
.0 -13.9											0.00
.0 -14.9			5						•	5	2.50
TAL		82	440	130	174	87	7 1	16			3.52
M. TOTAL	1000	1000	918	478	348	174	87	16			
L. AVG.	0.00*	8.30	7.36	3,21	6.06	5.88	6.35	6.50	6.72		
Enace -10	WE T					AVERAGE	-	PERTOD			
ERAGE SIG. RIANCE OF S			0 1	FT 30		VARIANC		LALE DE	0100	0 0	9 SEC 80

AVERAGE SIG. HEIGHT # 3,43 PT VARIANCE OF SIG. HEIGHT # 1,18 FT SQ STANDARD DEVIATION OF HEIGHT # 1,09 FT AVERAGE WAVE PERIOD = 6.89 SEC **
VARIANCE OF WAVE PERIOD = 8.50 SEC **
STANDARD DEVIATION OF PERIOD = 2.91 SEC*

REBULTS OBTAINED FROM 1024-8ECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS XIRE NAVE GAGE LOCATED AT SAVANNAM LIGHT TOWER.

4 CALMS ARE OMITTED.

Insufficient data for December.

2490 OBSERVATIONS

SUMMARY FOR 27 MONTHS APR 71 THROUGH MAY 74

PERIOD				SIG.	HEIGH	T (FT)							
(SECS)													
	0-1	1-2	2-3	3-4	4-5	4=6	6-7	7-8	8-9	9-10	101.	CUM. TOT. *	ROW AVG. *
0.09						-							0.00
1.0 - 1.9		2	5	1							6	1000	5.29
2.0 - 2.9	1	12	11	1							24	994	1.96
3.0 - 5.9	1	15	62	5.5	5						102	970	2.59
4.0 - 4.9		18	67	52	15	5	1				155	867	2.98
5.0 - 5.9	1	6	53	61	44	21	10	2			197	712	3.79
6.0 - 6.9	1	17	59	24	18	8	7	3	1	1	109	515	3.63
7.0 - 7.9		10	25	10		5	5				53	406	2.89
8.0 - 8.9	1	62	106	19	13	5	1	1			206	353	2.49
9.0 - 9.9		24	44	Q	1						79	147	2,32
10.0 -10.9			5.5	6	5						38	69	2.57
11.0 -11.9												31	0.00
12.0 -12.9			1.1	5	1						18	31	2.89
13.0 -13.9												13	0.00
14.0 -14.9		5	5	3	1						11	13	2.91
15.0 -15.9												5	0.00
16.0 -16.9			2								5	5	2.67
TOTAL	6	177	438	213	101	36	20	6	5	1			2.96
CUM. TOTAL	1000	994	A17	380	166	65	29	9	3	1			
COL. AVG.	5.30*	7.17	6.84	6.11	6.24	6.07	6,15	6.57	6.25	7.17	6.63		

AVERAGE SIG. HEIGHT # 2.95 FT AVERAGE WAVE PERIOD # 6.64 SEC*
VARIANCE OF SIG. HEIGHT # 1.46 FT SQ VARIANCE OF WAVE PERIOD # 6.06 SEC SQ*
STANDARD DEVIATION OF HEIGHT # 1.21 FT STANDARD DEVIATION OF PERIOD # 2.46 SEC* RESULTS OBTAINED FROM 1020-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT SAVANNAH LIGHT TOWER.

CALMS ARE OMITTED.


Table A-28. CERC wave gage history for Sunglow Fishing Pier, Daytona Beach, Florida.

Type of Gage Pressure	Beginning of Proper Operation Operation 8 Nov.1964 1 20 Oct. 1966 12 21 Jan. 1967 21 19 Oct. 1967 13 1 Aug.1968 17	End of Proper Operation 1 Aug. 1966 21 July 1967 13 June 1968 17 Aug. 1968	Explanati Gage struck by lig	Gage Length (feet)	on Length Range Bopth from side (feet) (ft MSL) (ft MSL) end of htning. — 7 to +18	Water Depth (ft MSL)	Distance from seaward end of pier 19 ff (on south side of pier)	Pier Length (feet) 1,000
	20 Oct. 1968 31 Aug. 1969 10 Sept.1969 21 July 1970 29 July 1970 29 Aug. 1970 22 Oct. 1970 5 July 1972 11 Aug. 1972 25 July 1974	31 Aug. 1969 21 July 1970 29 Aug. 1970 5 July 1972 25 July 1974	20 Oct. 1968 31 Aug. 1969 Gage damaged by storm. 10 Sept.1969 21 July 1970 Gage struck by lightning. 29 July 1970 29 Aug. 1970 Gage damaged by storm. 22 Oct. 1970 5 July 1972 Electronic cable corroded. 11 Aug. 1972 25 July 1974 Gage discontinued.					

Table A-29. Number of analyzed records from Daytona Beach, Florida. 1

K											-		
YR YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	вст	NOV	DEC	тот
1964											129	175	304
1965	171	133	183	179	186	170	157	166	173	177	179	176	2050
1966	177	157	181	174	172	165	177	4		50	159		1416
1967	25	165	173	178	186	147	110			66	153	133	1336
1968	186	174	182	178	138								858
1969							120	110	81	62			373
1970													
1971			4D	111	101	90	75	108	90	72	63	120	870
1972	103	112	120	110	118	112		76	106	115	100	77	1149
1973	98	90	114	60	98	97	52	67	55	80	80	59	950
1974	100	94	85	75	97	87	73						611


Results before November 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the CERC method. Results after November 1968 obtained from 1,024-second digital records taken four times daily. Results for September 1971 to December 1972 have not been compensated for hydrodynamic attenuation due to submergence of the gage.

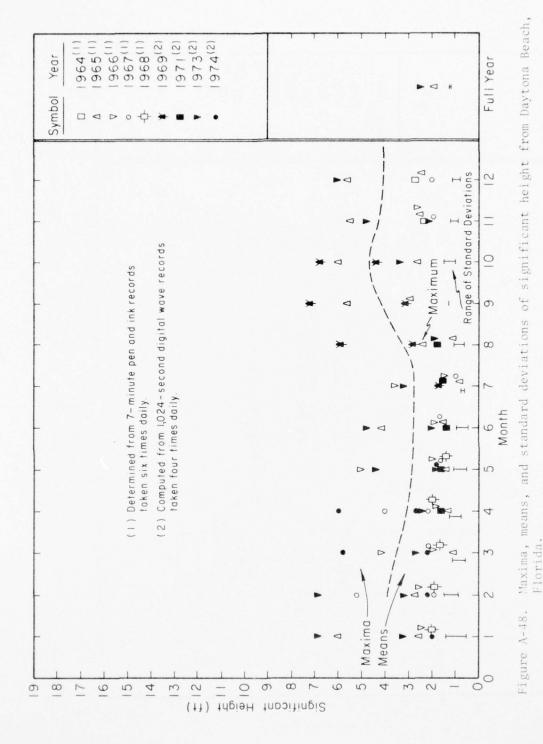


,,

三八八 日本 日本 明

187

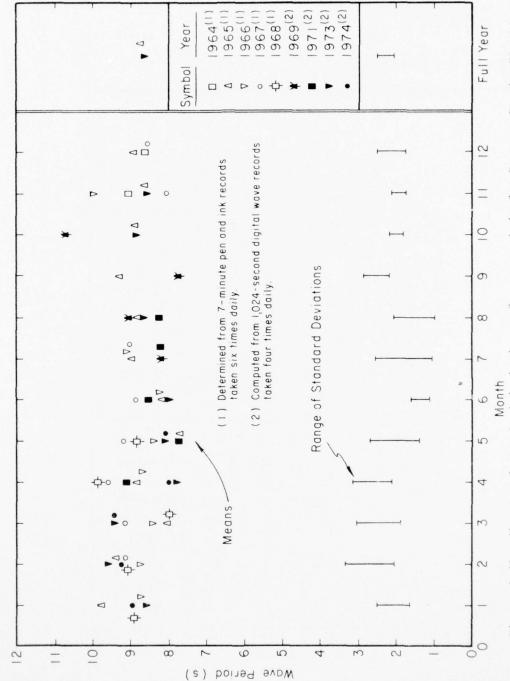

Means and standard deviations of wave periods for Daytona Beach, Florida. Figure A-49.

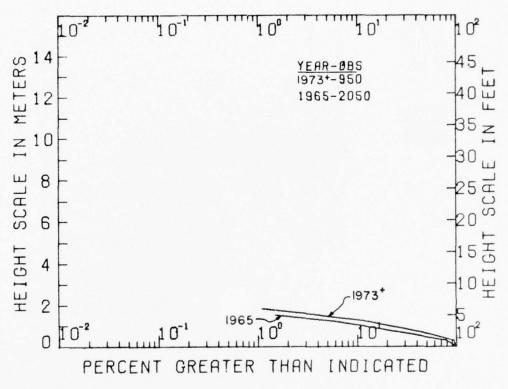

NOTE:

= computed from 1,024-second digital wave records taken four times daily.

Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-50. Annual cumulative significant height distributions from Daytona Beach, Florida.

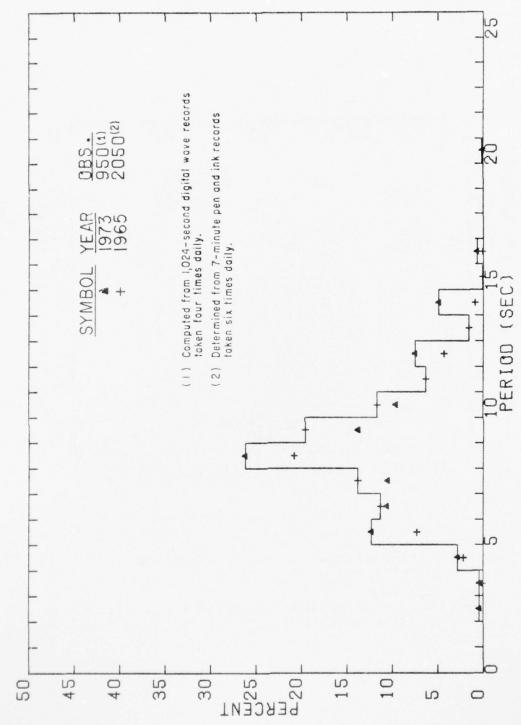


Figure A-51. Annual significant period distributions from Daytona Beach, Florida.

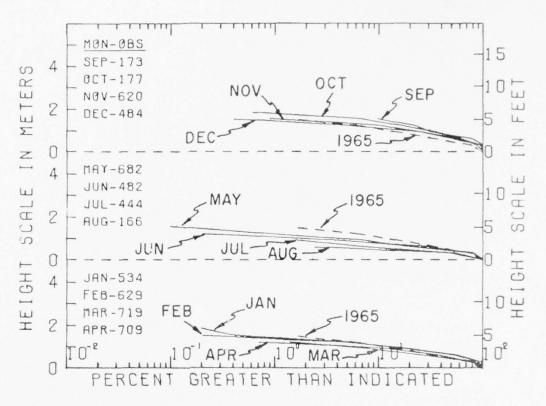


Figure A-52. Seasonal summaries of cumulative significant height distributions from Daytona Beach, Florida; determined from 7-minute pen and ink records taken six times daily.

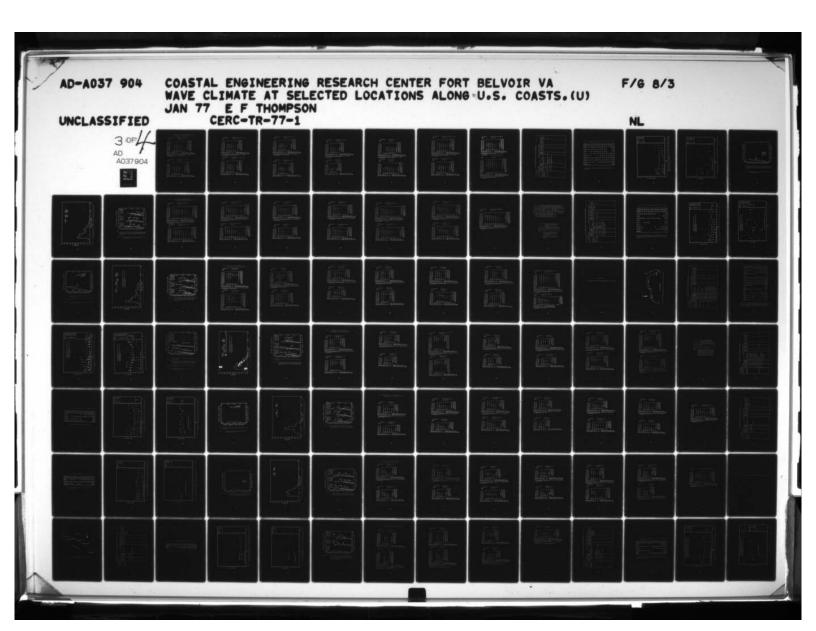




Table A-30. Wave climate for Daytona Beac Distribution of significant I (in observations per 1,000 of

534 OB	SERVATION	8	5	UMMARY	FOR J	AN 65	JAN 66
PERIOD				HEIG	HT (FT	,	
(SECS)							
	0-1	1-5	2-3	3-4	4-5	5-6	6-7
.0 - 1.9	7						
2.0 - 2.4							
2.5 . 2.9							
3.0 - 3.4							
3.5 . 3.9		2					
4.0 - 4.9		5	7	5			
5.0 - 5.9	5	30	25	2			
6.0 - 6.9		56	62	19	4		
7.0 - 7.9		3.2	58	28	9		
8.0 . A.9	2	71	45		9		
9.0 . 9.9		86	51	21	6	2	
10.0 -10.9	5	67	60	17	7		
11.0 -11.9		41	41	15	4		
12.0 -12.9	2	17	24	7	4		5
13.0 -13.9		7	19	6	2		
14.0 -14.9		4	5	7			
TOTAL	15	416	391	129	45	2	2
CUM. TOTAL	1000		569	178	49	4	2
COL. AVG.	9.25			9.46	9,38	9.50	12.50
AVERAGE STG	HETGHT		9 5 7			VERAGE	HAVE F
WART NEE OF		CH	70				

VARIANCE OF SIG. HEIGHT # .79 FT SQ VARIANCE OF HA STANDARD DEVIATION OF HEIGHT # .89 FT STANDARD DEVIA RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN HAVE GAGE LOCATED AT SUNGLOW FISHING PIER # CALMS ARE OMITTED.

459	OBSERVATIONS	5	8	UMMARY	FOR	FEB 65	FE8 66
PERIO				HEIG	HT (F	7)	
(SECS)							
	0-1	1-5	5-3	3-4	4-5	5-6	101.
.0 - 1.							
5.0 - 5.							
2.5 - 2.							
3.0 - 3.							
3.5 - 3.							
4.0 - 4.	9 2	8					10
5.0 - 5.	9 5	25	24	10			64
6.0 - 6.	9 10	46	51	14	5		124
7.0 - 7.		41	60	35	16		166
8.0 . A.		56	38	21			130
9.0 - 9.		75	54	21	5		169
10.0 -10.		54	46	21	3		135
11.0 -11.		25	37	14	5		84
12.0 -12.		24	29	3	5 5 5 2 3	2	60
13.0 -13.		3	54	1	i	_	34
14.0 -14	9 2		8	3	-		19
15.0 -15.		,					, ,
16.0 -16.		2					3
TOTAL	72	370	370	143	43	2	,
CUM. TOTA		928	558	188	45	5	
		9.08	9.32	8.86	9.17	12.50	9.11
COL. AVG.	0.42.		., 36	0.00		16.30	4.11

AVERAGE SIG. HEIGHT # 2.22 FT AVERAGE WAVE P VARIANCE OF WAR STANDARD DEVIATION OF HEIGHT # .95 FT STANDARD DEVIA

719 OBSERVATIONS SUMMARY FOR MAR 65 MAR 66 MAR 67 AR 68 PERIOD HEIGHT (FT) (SECS) CUM. ROM TOT. AVG. ...
1000 .00
1000 .00
1000 .00
1000 1022
975 1.41
849 1.89
695 1.77
554 1.63
421 1.57
243 1.86
103 1.61
41 2.00
16 2.72
3 1.00
1.68 2.0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 6.0 - 6.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL COL. AVG. TOT.* 2 - 3 1-2 18 96 82 85 75 114 81 126 154 141 133 178 140 62 25 13 19 6 6 10 10 1 6 591 839 8.16 172

AVERAGE SIG. MEIGHT # 1.68 FT AVERAGE WAVE PERIOD # 8.40 SEC*
VARIANCE OF SIG. MEIGHT # .67 FT SQ VARIANCE OF WAVE PERIOD # 4.41 SEC SQ*
STANDARD DEVIATION OF MEIGHT # .82 FT STANDARD DEVIATION OF PERIOD # 2.10 SEC*

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE WAVE GAGE LOCATED AT SUNGLOW FISHING PIER.

SUMMARY FOR APR 65 APR 66 APR 67 APR 68 709 OBSERVATIONS PERIOD HEIGHT (FT) (SECS) CUM. ROW TDT.* AVG.* 1000 .00 1000 .00 1-0 101. 2.0 - 2.4 2.5 - 2.4 3.0 - 3.4 3.5 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 15.0 - 15.9 16.0 - 16.9 TOTAL CUM. TOTAL CUM. TOTAL 1000 .00 1000 .50 996 .50 994 1.10 972 1.62 901 2.03 775 2.25 659 1.95 526 1.59 397 1.55 249 1.62 151 1.69 90 2.14 25 2.57 4 .00 1 10 17 13 8 24 30 35 22 71 126 116 133 129 30 51 32 56 63 72 59 23 20 20 42 51 21 24 31 3 16 21 24 1 148 16 6 1 10 4 3.50 4 209 422 1000 791 9.04* 9.32 251 370 9.09 111 118 9.70 9.25

AVERAGE SIG. MEIGHT = 1.79 FT AVERAGE HAVE PERIOD = 9.25 SECTION OF MEIGHT = .80 FT 80 VARIANCE OF WAVE PERIOD = 8.42 SEC 800 STANDARD DEVIATION OF PERIOD = 2.53 SECTION O

SUMMARY FOR MAY 65 MAY 66 MAY 67 MAY 68 SERVATIONS PERIOD HEIGHT (FT) CUM. ROW TOT.* TOT.* AVG.* 1000 .00 (82C5) 2.0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 3.5 - 3.9 4.0 - 4.9 5.0 - 5.9 7.0 - 7.9 8.0 - 8.9 10.0 - 10.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL COL. AVG. 1-2 1000 .00 1000 .00 1000 .00 1000 1.00 960 1.5A 881 1.67 767 1.90 604 1.82 396 1.59 192 1.46 106 1.36 62 1.60 14 2.21 3 3.50 10 18 59 81 92 122 126 69 22 26 4 79 114 163 208 10 15 23 29 28 12 18 28 55 86 1 10 11 1.58 1000 A.70 12.50

AVERAGE SIG. HEIGHT = 1.58 FT AVERAGE WAVE PERIOD = 8.49 SEC*

VARIANCE OF SIG. MEIGHT = .64 FT SG VARIANCE OF WAVE PERIOD = 4.06 SEC SQ*

STANDARD DEVIATION OF MEIGHT = .80 FT STANDARD DEVIATION OF PERIOD = 2.02 SEC*

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE WAVE GAGE LOCATED AT SUNGLOW FISHING PIER CALMS ARE OMITTED.

SUMMARY FOR JUN 65 JUN 66 JUN 67 482 OBSERVATIONS PERIOD HEIGHT (FT' (SECS) TOT. * 1000 1000 #O* 4VG.* 2.0 - 2.4 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL COL. AVG. 2-3 TOT . * 1000 .00 1000 .00 1000 .00 1000 1.10 989 1.12 944 1.63 845 1.80 652 1.73 320 1.65 114 1.47 28 1.67 11 45 99 194 331 206 62 62 98 151 108 17 12 21 21 2 60 48 86 44 2 2.50 253 288 8.53 205 506 1000 795 8.45* 8.30

* C. C.

AVERAGE SIG. HEIGHT # 1.62 FT AVERAGE WAVE PERIOD # 8.41 SEC*
VARIANCE OF SIG. HEIGHT # .60 FT SQ VARIANCE OF WAVE PERIOD # 2.11 SEC SQ*
STANDARD DEVIATION OF HEIGHT # .77 FT STANDARD DEVIATION OF PERIOD # 1.45 SEC*

```
PERIOD (SECS)

O=1 1=2 2=3 3=4 TOT.* TOT.* AVG.*

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1000 .00

1
```

1

THE PERSON NAMED IN COLUMN

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK DECORDS TAKEN WITH A PRESSURE WAYE GAGE LOCATED AT SUNGLOW FISHING PIER

• CALMS ARE OMITTED.

166 DASERVATIONS

SUMMARY FOR AUG 65

PERIOD				HEIGH	T (FT)							
(SECS)												
					CUM.	RO-						
	0-1	1-2	2-3	TOT	TOT							
.0 - 1.9	331				1000	.00						
2.0 - 2.4					1000	.00						
2.5 - 2.9					1000	.00						
3.0 - 3.4					1000	.00						
3.5 - 3.9					1000	.00						
4.0 - 4.9					1000	.00						
5.0 - 5.9					1000	.00						
6.0 - 6.9	6	18	6	45								
7.0 - 7.9	36	60	6	153		1.21						
8.0 - 8.9	30	193	6	342		1.39						
9.0 - 9.9	30	553		378		1.38						
10.0 -10.9	24	24		12		1.00						
11.0 -11.9			6	9		2.50						
TOTAL	458	518	24			1.07						
CUM. TOTAL	1000	542	24									
COL. AVG.	A.74*	A . A 4	A.50	8.61								
AVERAGE SIG.	EIGHT	1.0	7 FT			ERAGE	WAVE PE	RIOD	. 8.81	SEC.		
VARIANCE OF ST				FT 50					100 .		SEC	500
STANDARD DEVIA				.54 FT					P PERIO			SEC.

SUMMARY FOR SEP 65 173 OBSERVATIONS HEIGHT (FT) PERIOD (SECS) TOT.* AVG.*
1000 .00
1000 .00
1000 .00
1000 .00
1000 .00
1000 2.50
908 2.37
815 2.62
723 2.50
595 2.95
376 3.04
237 3.20
104 4.00
12 4.00
2.92 2.0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 3.5 - 3.4 3.5 - 3.4 3.6 - 4.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.0 10.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL CUM. TOTAL 0-1 1-2 2-3 3-4 4-5 5-6 TOT.* 12 6 6 17 23 6 12 23 92 92 92 127 220 139 133 58 35 12 29 35 58 40 29 23 69 52 35 35 110 64 58 12 6 12 12 23 23 17 6 17 6 121 220 10.50 6 6 23 17 23 17 6 6 110 329 9.82 445 775 8.88 98 1000 1000 9.32

:

AVERAGE SIG. HEIGHT = 2,92 FT AVERAGE WAVE PERIOD = 9,32 SECTION OF HEIGHT = 1,53 FT SG VARIANCE OF WAVE PERIOD = 4,81 SEC SG VARIANCE OF WAVE PERIOD = 4,81 SEC SG STANDARD DEVIATION OF PERIOD = 2,19 SECTION OF PERIOD = 2

RESULTS OBTAINED FROM THINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE WAVE GAGE LOCATED AT SUNGLOW FISHING PIER

CALMS ARE OMITTED.

177 ORSE	RVATIONS	3	9	UMMARY	FOR O	CT 65				
PERIOD (SECS)				HEIG	HT (FT	,				
	0-1	1-2	2-3	3-4	4-5	5-6	6-7	101.*	CUM. 101.	80* AVG.*
2.6 - 2.4 2.5 - 2.9 3.0 - 3.4									1000 1000 1000	.00
3.5 - 3.9 4.0 - 4.9 5.0 - 5.9		6	23					6	1000	.00 1.50 2.17
6.0 - 6.9 7.0 - 7.9	11	17	45	90 11 11	11 23 17	17	6	175 107 277	960 785	3.34
9.0 - 9.9	51	158	40	17	17	11		158	243	3.10
11.0 -11.9 12.0 -12.9 13.0 -13.9	6	17	34	11117	17	6 6		51 68 34	107	3.06 3.42 3.50
14.0 -14.9 TOTAL CUM. TOTAL COL. AVG.	124	260 876 8.59	616 8.99	198 362 8.73	96 164 9.32	68 9.50	7.50	8,87	•	2.50

AVERAGE SIG. HEIGHT = 2.59 FT AVERAGE WAVE PERIOD = 8.87 SEC AVERAGE OF BIG. HEIGHT = 1.98 FT SG AVERAGE WAVE PERIOD = 8.87 SEC SQ AVERAGE OF WAVE PERIOD = 8.87 SEC SQ AVERAGE OF WAVE PERIOD = 8.87 SEC SQ AVERAGE OF WAVE PERIOD = 2.04 SEC STANDARD DEVIATION OF PERIOD = 2.04 SEC STANDAR

620 DESERVATIONS SUMMARY FOR NOV 64 NOV 65 NOV 66 NOV 67 HEIGHT (FT) PERIOD CUM. ROA TOT. • AVG. • 1000 0.00 1000 0.00 1000 0.00 1000 0.00 1000 83 995 2.29 804 2.69 876 2.43 501 2.32 279 2.41 141 2.50 37 2.40 31 2.50 32 2.00 33 33 TOT.* .0-1 1-2 2-3 3-4 4-5 0 - 1.9
2.0 - 2.4
3.0 - 3.4
3.5 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
6.0 - 10.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 15.9
15.0 - 16.9
TOTAL
CUM. TOTAL
CUL. AVG. 5 70 122 128 175 222 138 75 29 16 16 16 23 3 2 2 6 11 6 6 3 5 2 47 58 37 794 55 32 10 3 6 2 2 427 948 8.80 5 13 24 32 37 23 10 3 5 2 11 18 21 15 16 5 45 34 61 35 21 13 208 521 59.8 52 1000 9.74 153 253 9.11

AVERAGE SIG. HEIGHT # 2.33 FT AVERAGE WAVE PERIOD # 8.95 SEC*
VARIANCE OF SIG. HEIGHT # 1.20 FT SG VARIANCE OF WAVE PERIOD # 4.30 SEC SQ*
STANDARD DEVIATION OF MEIGHT # 1.09 FT STANDARD DEVIATION OF PERIOD # 2.07 SEC*

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A PRESSURE WAVE GAGE LOCATED AT SUNGLOW FISHING PIER

CALMS ARE OMITTED.

484	OBSERVATIONS	5	5	UMMARY	FOR D	EC 64	DEC 65	DEC -7	
PERIOD				HEIG	HT (FT)			
(SECS)									
									00
	0-1	1-2	2-3	3-4	4-5	5-6	TOT	TOT.	RO.
				,			101.4		AVG.
2.0 - 2.								1000	.00
2.5 - 2.								1000	.00
3.0 - 3.								1000	.00
3.5 - 3.								1000	.00
4.0 - 4.			2	,					.00
5.0 - 5.		23	43	5			72	1000	3.00
6.0 - 6.		74	45	52	2			996	2.27
7.0 - 7.		68	35	48	12	4	176	954	
6.0 - 4.		54	54	19	21		167	748	2.60
		83	37	33	- 1		149	561	2.51
	•						155	432	2.15
10.0 -10.		48	48	25	5		130	277	2.36
11.0 -11.		39	14	10	2		66		2.12
12.0 -12.		21	5.0	u			56		2.13
13.0 -13.			10	4			14	55	2.79
14.0 -14.			10	6			5	10	3.25
15.0 -15.							5	5	2.50
TOTAL	15	409	355	508	43	4			2.37
CUM. TOTA		988	579	256	48	4			
COL. AVG.	9.67*	8.73	8.83	4.55	A.55	7.50	8.72		

AVERAGE SIG. HEIGHT # 2,37 FT AVERAGE HAVE PERIOD # 8.72 SEC*
VARIANCE OF SIG. HEIGHT # .86 FT SQ VARIANCE OF WAVE PERIOD # 4.46 SEC SQ*
STANDARD DEVIATION OF MEIGHT # .93 FT STANDARD DEVIATION OF PERIOD # 2.11 SEC*

SALT DESERVATIONS SUPPLEY FOR 35 MONTHS NOV 64 THROUGH HAY 68 HEISHT (FT) CUM. FON TOT. AVG. 0
1000 .00
1000 .00
1000 .00
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90
1000 .90 1-5 5-3 3-4 TOT.* .0 - 1.9 2.0 - 2.0 2.5 - 2.0 3.0 - 3.0 3.5 - 3.9 5.0 - 5.0 7.0 - 7.9 6.0 - 6.9 7.0 - 7.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 12.9 15.0 - 15.9 16.0 - 15.9 16.0 - 15.9 16.0 - 15.0 5 7 7 9 21 26 15 7 5 1 15 69 124 143 180 195 128 67 42 23 10 30 56 58 88 101 59 30 14 3 17 21 10 10 11 7 5

AVERAGE BIG. MEIGHT # 1.92 FT VARIANCE OF BIG. MEIGHT # 1.03 FT 32 STANDARD DEVIATION OF MEIGHT # 1.02 FT AVERAGE WAVE PERIOD . 8.85 SECVARIANCE OF MAYE PERIOD . 8.44 SEC 380STANDARO DEVIATION OF PERIOD . 2.11 SEC-

RESULTS OBTAINED FROM T-MINUTE PEN AND INK RECORDS TAKEN MITH A PRESSURE MAYE GAGE LOCATED AT SUMGLOW FISHING PIER CALMS ARE OMITTED.

1980 OBSERVATIONS

SUMMANY FOR 22 MONTHS JUL 69 THROUGH JUL 74

PERIOD (SECS)				\$1G.	HEIGH	Y (FT)					
	0-1	1-2	2 • 3	3-4	4.5	5=6	6-7	7-8	707.*	CUM. TOT. •	
0.09										1000	0.00
1.0 - 1.9										1000	
2.0 - 2.9	3	18	14	16	15	1			63		2.80
3.0 - 3.9		5	2						7		1.65
4.0 - 4.9		12	10	4	1 7				58	931	5.51
5.0 - 5.9		20	46	26	7	3	1		106		2.75
6.0 - 6.9		20	25	19	8	3 2 5	5		8.2		2.77
7.0 - 7.9		24	25	13	4	2	1		71		2.46
8.0 - 8.9		151	77	1 6	10	5	1		277	644	
9.0 - 9.9		76	46			4	1	1	154		2.13
10.0 -10.9		36	26	16	11	4	1		101	213	2.51
11.0 -11.9		-								115	
12.0 -12.9		15	15	13	5	3			60	115	2.51
13.0 -13.9		٠.		•						52	0.00
14.0 -14.9		12		5	6	2	2		41	52	2.78
15.0 -15.9		•••								10	0.00
16.0 -16.9		u	1	1	3		1		9	10	2.67
17.0 -17.0		-					•			1	0.00
18.0 -18.9										1	0.00
19.0 -19.0										1	0.00
					1				1	i	3.00
20.0 -20.9		1							•		0.00
21.0 +		***	101		77	25					2.38
TOTAL	61	398	293	137		34	•	1			
CUM. TOTAL		939	541	247	111			- 50	8.36		
COL. AVG.	0.14.	8.60	8.04	7.66	8.63	9.06	9.38	9.50	0.30		

AVERAGE SIG. HEIGHT # 2.37 FT AVERAGE HAVE PERIOD # 8.36 SEC*
VARIANCE OF SIG. HEIGHT # 1.35 FT SQ VARIANCE OF HAVE PERIOD # 8.17 SEC SQ*
STANDARD DEVIATION OF HEIGHT # 1.16 FT STANDARD DEVIATION OF PERIOD # 2.86 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE WAVE GACE LOCATED AT SUNGLOW FISHING PIFR.

CALMS ARE OMITIED.


Table A-31. CERC wave gage history for Palm Beach Pier, Palm Beach, Florida.

			Pier Length (feet)	800		800						
			Distance from seaward end of pier	0		0						
Torida.		ach, Florida	Water Depth (ft MSL)	16		16						
, raim beach, I		LOCATION: Palm Beach Pier, Palm Beach, Florida	Gage Range (ft MSL)									
Deach Fle		Palm Beac	Gage Length (feet)	25		25						
Table A-31. CENC Wave gage filstory for raill beach riet, raill beach, Florida.		LOCATION: 1	Explanation	Step-resistance (SR), 17 Feb. 1954 15 Oct. 1954 Recorder out of order. staff-parallel type		9 Oct. 1956 Boat damaged pier, gage moved to side of pier.	25 Feb. 1957 31 Mar. 1958 Gage damaged by storm.	4 Mar. 1962 Gage destroyed by storm; not replaced.				
aute A-D1. C		· .	End of Proper Operation	15 Oct. 1954	9 Dec. 1954 20 Oct. 1955		31 Mar. 1958					
	7.4	42' N., 80°02' 1	Beginning of Proper Operation	17 Feb. 1954	9 Dec. 1954	22 Feb. 1956	25 Feb. 1957	30 June 1958				
	CERC Form 174-74 18 Mar 74	COORDINATES: 26°42' N., 80°02' W.	Type of Gage	Step-resistance (SR), staff-parallel type		SR staff-parallel type 22 Feb. 1956						


Table A-32. Number of analyzed pen and ink records from Palm Beach, Florida. $^{\rm 1}$

YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NØV	DEC	тот
1954		72	159	168	162	173	178	180	169	49		120	1430
1955	177	139	177	169	175	174	180	181	172	43			1587
1956		44	181	179	160	160	175	179	174	102			1354
1957		13	92	147	83	172	124	152	159	186	174	108	1410
1958	119	147	5			5	170	178	57	175	123	182	1161
1959	183	162	181	176	148	161	181	170	171	154	168	165	2020
1960	116	174	174	170	142	93	67	184	155	184	157	71	1687
1961	36	79	104	136		34	101	177	168	179	180	107	1301
1962	150	112											262

 $^{^{1}\}mbox{From 7-minute records taken six times daily; analyzed by the second BEB method.$

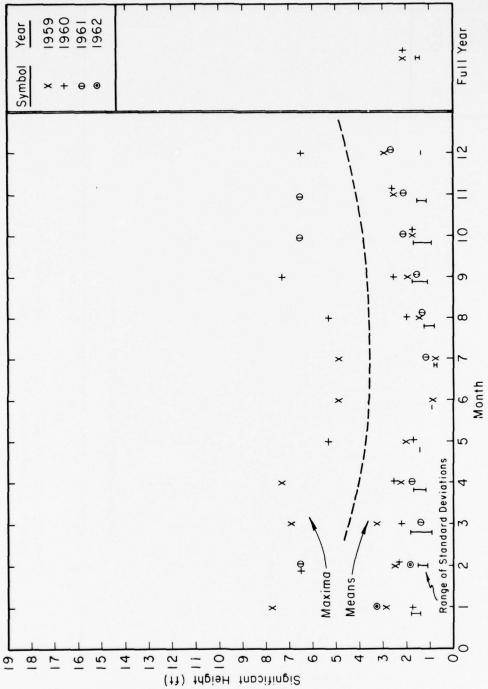


Florida; determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Tables A-34 and A-35). Maxima, means, and standard deviations of significant height from Palm Beach, Figure A-53.

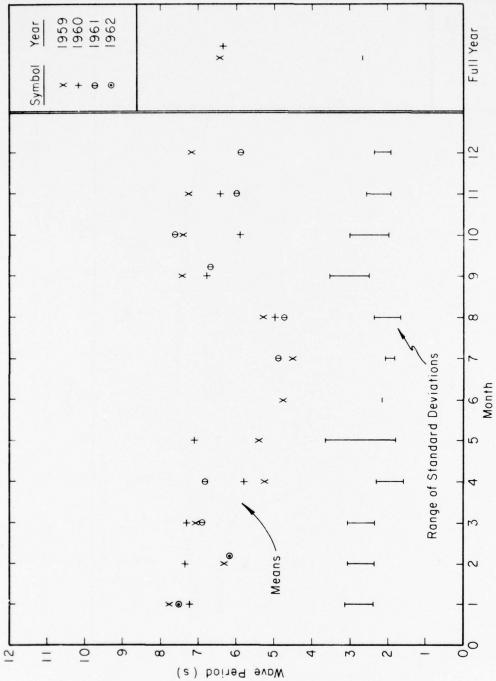

1

The state of the s


Means and standard deviations of wave periods for Palm Beach, Florida; determined by an old analysis method from 7-minute pen and ink records taken six times daily Figure A-54.

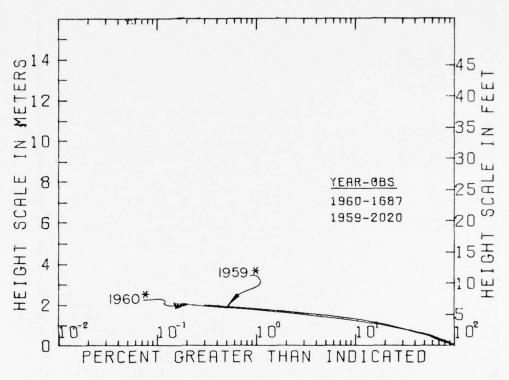


NOTE:

* = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Tables A-34 and A-35).

Figure A-55. Annual cumulative significant height distributions from Palm Beach, Florida.

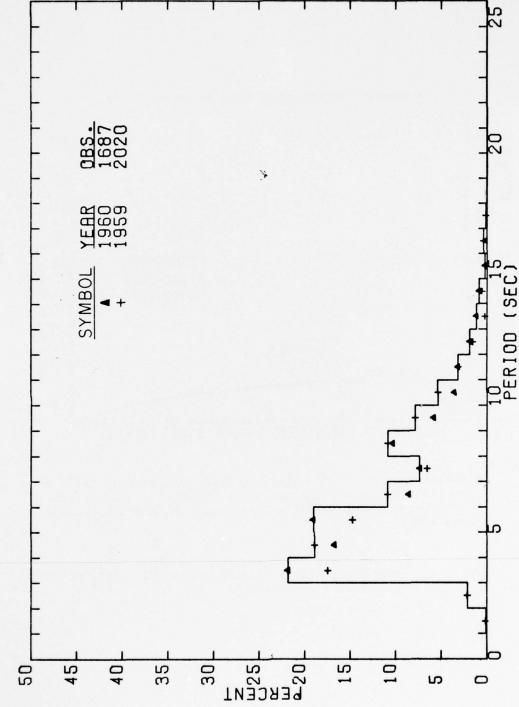

Annual significant period distributions from Palm Beach, Florida; determined by an old analysis method from 7-minute pen and ink records taken six times daily. Figure A-56.

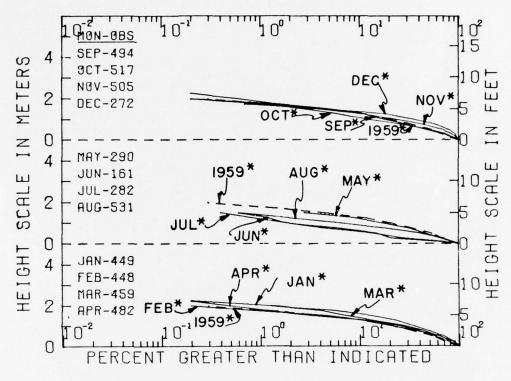

NOTE:

* = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Tables A-34 and A-35).

Figure A-57. Seasonal summaries of cumulative significant height distributions from Palm Beach, Florida.

Table A-33. Wave climate for Palm Beach, Florida.

Distribution of significant height versus period (in observations per 1,000 observations).

PERIOD				HEIG	HT (FT)							
(SECS)													
												CUM.	HO.
	09	-1.7	-5.5	•3.3	-4.1	-4.9	-5.7	-6.5	• / . 3	-8.1	101.	101.	
.0 - 1.9	65											1000	
2.0 - 2.4												1000	
2.5 - 2.9	20											1000	
3.0 - 3.4	50	16	1								43	1000	
3.5 - 3.9	13	24		7							60	957	
4.0 - 4.9	11	9	42	27	13	5	5				114	898	
5.0 - 5.9		13	27	21	9	51	9	9			140		3.25
6.0 - 6.9	15	24	13	9	9	50	16	5			114		2.87
7.0 - 7.4	9	18	27	11	9	200		5			81		5.00
8.0 - 8.9	9	24	27	31	24	16	13	4			160	448	5.45
9.0 - 9.9	5	13	18	18	18	11	13	9	5		112	288	3.44
10.0 -10.9		5	13	13	11	9	7	9			69	176	3.69
11.0 -11.9	5	4	7	7		7	4	2	5		40	107	3.57
12.0 -12.9	5	5	5	4	4	7		5			26	67	3.30
13.0 -13.9	5	5									5	40	
14.0 -14.9		4	5			5	4		5		17	36	
15.0 -15.9										2	2	19	
16.0 -16.9				2		5	2	5	5		12	17	
17.0 -17.9		5					5				5		3.26
TOTAL	156	165	189	156	98	107	73	45	9	2		,	2.68
CUM. TOTAL	1000	844	679	490	334	236	129	56	11	2			
COL. AVG.	5.87*	6.90	7.07	7.55	8.00	8.17	9.02		13.00		7,56		
. WED													
AVERAGE SIG.				FT 50	A	VERAGE				56 SEC	. SEC :		

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE WAVE GAGE LOCATED AT PALM BEACH PIER . CALMS ARE DMITTED.

PERIOD (SECS)				HEIG	HT (P	1)						
(0200)											CUM.	RC*
	09	-1.7	-2.5	*3.3	-4.1	-4.9	-5.7	-6,5	-7.3	101.	101.0	AVG.
.0 - 1.9	21										1000	.00
2.0 - 2.4											1000	.00
2.5 . 2.9											1000	.00
3.0 - 5.4	36	56	2	2	2					80		1.00
3.5 - 3.9	11	33	40	4						45		1.58
4.0 - 4.9	11	29	56	42	13					156		2.14
5.0 - 5.9	5.5	50	40	36	31	1.6	5			183		2.44
6.0 - 6.9	16	30	9	4	11	1.5	16			108		2.53
7.0 - 7.9	9	25	5.5	4	11	5				76	381	1.95
5.0 - A.9	5	16	27	21	9	5	4			89	305	2.50
9.0 - 9.9	4	25	50	16	9	11	7	5		96		5.00
0.0 -10.9		1 1	18	7		4	2	5		46	119	2.57
1.0 -11.9			7	11		5			2	23	73	3.18
2.0 -12.9		2	7	9	2	5				53		2.69
5.0 -15.9		5			5		5			,	85	3.40
4.0 -14.9		4		5		2	5 5			11	15	3.02
5.0 -15.9	2						5	5		7	9	3.93
6.0 -16.9						2				5	5	4.48
OTAL	141	248	248	165	92	60	38	7	5			15.5
UM. TOTAL	1000	859	612	364	199	107	47	9	2			
OL. AVG.	5.23*		6.55	7.22	6.71	8.24	8.85	11.63	11.50	6.70		
VERAGE SIG.	HETGHT		1 . 7			VERAGE	WAVE	PE # 100		70 St C		
ARTANCE OF S				** 50				AVE PE			0 St C	30.
TANDARD DEVI						TANDAR						

CUM. ROM 0-,9 -1,7 -2,5 -3.3 -4,1 -4,9 -5,7 -6,5 -7,3 TOT.* TOT.* AVG.* 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 3.5 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL COL. AVG. 1000 .00 1000 .00 1000 .00 968 1.14 907 2.22 768 2.75 574 2.56 465 1.91 369 2.67 219 2.58 153 3.3 91 3.10 39 3.04 9 4.46 7 3.13 2.57 26 31 159 194 109 96 150 26 9 17 37 24 26 15 7 31 13 2 17 26 17 41 37 15 7 39 13 9 22 9 26 13 66 30 2 172 438 7,24 205 819 6,86 1000

AVERAGE SIG. MEIGHT = 2.39 FT AVERAGE WAVE PERIOD = 7.11 SEC*
VARIANCE OF SIG. MEIGHT = 2.43 FT SQ VARIANCE OF WAVE PERIOD = 6.38 SEC SQ#
STANDARD DEVIATION OF MEIGHT = 1.56 FT STANDARD DEVIATION OF PERIOD = 2.53 SEC*

RESULTS ORTAINED FROM TAMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE WAYE GAGE LOCATED AT PALM BEACH PIER CALMS ARE OMITTED.

482 OBSERVATIONS SUMMARY FOR APR 59 APR 60 APR 61 PERIOD (SECS) HEIGHT (FT) CUM. KON TOT. A VU... 1000 1.24 998 .43 968 .43 979 .74 908 1.23 788 2.40 597 3.16 365 2.75 26 1.69 162 2.11 101 3.10 48 2.59 28 3.26 14 3.66 2 .00 2 .86 2 .17 *1.7 *2.5 *3.3 *4.1 *4.9 *5.7 *6.5 *7.3 *8.1 2.0 - 2.4 2.0 - 2.4 2.5 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.1 12.0 - 11.9 12.0 - 12.9 12.0 - 12.9 14.0 - 14.9 CUM. TOTAL COL. AVG. 100 707. 5 12 14 5 71 120 191 212 129 74 81 81 46 39 17 12 39 23 17 27 25 33 19 56 27 10 37 44 23 4 12 15 4 1035 27 54 21 8 4 8 15 10 8 4 2 6 4 257 193 1000 743 4.41* 6.11 239 81 10 9,90 7.60 .00

AVERAGE SIG. MEIGHT # 2.14 FT AVERAGE NAVE PERIOD # 5.90 SECON VARIANCE OF SIG. MEIGHT # 2.16 FT SQ VARIANCE OF NAVE PERIOD # 4.72 SECON STANDARD DEVIATION OF PERIOD # 2.17 SECON STANDARD DEVIATION OF PERIOD # 2.17 SECON

100 m

SERVICE TO SERVICE TO

290 OHSERVATIONS SUMMARY FOR MAY 59 MAY 60

PERIOD HEIGHT (FT)

TOT. # AVG. 4 1000 .00 1000 .43 2.0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 7.0 - 7.9 8.0 - 8.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 CUH. TOTAL CUH. AVG. 0-.9 -1.7 -2.5 -3.3 -4.1 -4.9 193 3 -5.7 TOT. * 1000 .00 1000 .43 994 .00 996 .71 876 1.23 791 2.06 500 2.63 346 3.22 201 1.04 235 1.70 175 2.65 141 2.49 94 2.45 68 2.58 43 4.24 13 3.66 1.80 21 120 85 291 154 85 26 60 34 2A 31 66 21 14 62 14 7 17 45 17 10 14 3 36 36 59 86 15 348 1000

AVERAGE SIG. HEIGHT # 1.82 FT AVEPAGE NAVE PERIOD # 6.15 SEC VARIANCE OF SIG. HEIGHT # 1.97 FT SG VARIANCE OF NAVE PERIOD # 8.36 SEC SG STANDARD DEVIATION OF PERIOD # 2.89 SEC

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE WAVE GAGE LOCATED AT PALM BEACH PIER

CALMS ARE OMITTED.

161 DASERVATIONS SUMMARY FOR JUN 59 PERIOD HEIGHT (PT) (SECS) CUM. HON TUT. AVG. 1000 ,00 1000 .45 874 .59 649 .58 459 1.43 306 2.25 234 2.04 180 .43 153 .79 54 1.44 18 1.64 80 311 75 6 ·1.7 ·2.5 ·3.3 ·4.1 ·4.9 ·5.7 TOT.* 0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 3.5 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 9.0 - 9.9 10.0 - 10.9 TOTAL CUM. TOTAL CUM. TOTAL COL. AVG. 108 18 225 189 151 72 54 27 15 19 12 19 50 12 6 15 36 789 1000 4.32•

AVERAGE SIG. HEIGHT # .82 FT AVERAGE HAVE PERIOD # 4.75 SEC*
VARIANCE OF SIG. HEIGHT # .70 FT SQ VARIANCE OF MAVE PERIOD # 4.67 SEC 80*
STANDARD DEVIATION OF MEIGHT # .84 FT STANDARD DEVIATION OF PERIOD # 2.16 SEC*

282 ORSERVATIONS SUMMARY FOR JUL 59 JUL 61
PERIOD HEIGHT (FT)
(SECS)

0-.9 -1.7 -2.5 -3.3 -4.1 -4.9 -5.7

1

0-.9 -1.7 -2.5 -3.3 -4.1 -4.9 -5.7 TOT. - TOT. - AVG.
100 -1.9 344

2.0 -2.4 21

32 1000 .05

2.5 -2.9 14

3.0 -3.4 89 28 14

200 946 .78

3.5 - 3.9 113 18 14

222 746 .68

4.0 - 4.9 89 46 35 28

5.0 -5.9 14 18 11 7 76 222 1.41

6.0 -6.9 7 4 22 146 2.01

6.0 -6.9 7 4 22 146 2.01

8.0 -8.9 11 18 4 4 4 16 12 .70

8.0 -8.9 11 18 4 4 4 10 10 10 2.77

10.0 -10.9 4 1 11 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 16 164

12.0 -12.9 4 1 160

13.5 5 .43

14.6 6.5 6.6 5.26 5.26 5.19 5.14 .00 .00 6.50 4.68

AVERAGE SIG. HEIGHT # .82 FT AVERAGE HAVE PERIOD # 4.68 SEC*
VARIANCE OF SIG. HEIGHT # .51 FT SG VARIANCE OF WAVE PERIOD # 3.74 SEC SQ*
STANDARD OFVIATION OF HEIGHT # .71 FT STANDARD DEVIATION OF PERIOD # 1.93 SEC*

RESULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE WAVE GAGE LOCATED AT PALM BEACH PIER

CALMS ARE OMITTED.

531 OBSERVATIONS SUMMARY FOR AUG 59 AUG 60 AUG 61 PERIOD HEIGHT (FT) CUM. RCm 1000 .00 1000 .43 992 .43 992 .61 1006 2.01 306 2.01 306 2.01 306 2.01 306 2.01 306 2.01 306 2.01 306 2.01 307 2.01 308 3.01 309 3.01 00 - 1.9
2.0 - 2.4
2.5 - 2.9
3.0 - 3.4
3.5 - 3.9
4.0 - 4.0
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
8.0 - 8.9
10.0 - 11.9
11.0 - 11.9
12.0 - 12.9
TOTAL
CUM. TOTAL
CUL. AVG. -1.7 -2.5 -3.3 -4.1 -4.9 -5.7 TOT.+ 94 2 6 81 56 25 6 00.45 .43 .89 1.26 2.01 2.52 1.03 1.47 1.61 1.70 1.95 1.24 2 6 177 212 297 129 29 25 58 29 15 68 24 2 2 8 6 2 6 4 2 53 96 30 8 19 11 4 11 21 303 1000 4.44*

AVERAGE SIG. HFIGHT = 1.55 FT VARIANCE OF SIG. HEIGHT = 1.05 FT SQ STANDARD DEVIATION OF HFIGHT = 1.02 FT AVERAGE WAVE PERIOD # 4.98 SEC* VARIANCE OF WAVE PERIOD # 3.90 SEC 500 STANDARD DEVIATION OF PERIOD # 1.97 SEC*

494 DASERVATIONS SUMMARY FOR SEP 59 SEP 60 SEP 61 PERIOD (SECS)

1

The state of the s

10M. WG.*
1000 .00
1000 .00
1000 .89
728 1.61
624 2.60
306 2.00
316 2.22
223 2.43
126 2.74
64 3.24
27 1.84
18 2.55 CUM. 101. 0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 5.5 - 5.9 4.0 - 4.9 5.0 - 5.9 6.0 - 7.9 8.0 - 7.9 8.0 - 7.9 11.0 - 11.9 12.0 - 12.9 13.0 - 15.9 14.0 - 14.9 TOTAL CUM. TOTAL COL. AVG. -1.7 -2.5 -3.3 -4.1 -4.9 -5.7 m6.5 -7.3 -8.1 TOT.+ 59 51 61 26 20 8 32 34 128 144 104 119 73 35 80 93 97 62 38 61 16 16 10 2 10 18 14 16 8 2 117 6 16 14 6 6 16 24 10 14 2 10 24 2 10 24 6 217 34 63 1000 460 49 7.12 7.50 9.50 5.25*

AVERAGE WAVE PERIOD = 6.96 SEC+
VAHIANCE OF WAVE PERIOD = 9.98 SEC \$0+
STANDARD DEVIATION OF PERIOD = 3.16 SEC+ AVERAGE SIG. MEIGHT # 1.93 FT VARIANCE OF SIG. MEIGHT # 2.16 FT SQ STANDARD DEVIATION OF MEIGHT # 1.47 F 1.47 FT

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE HAVE GAGE LOCATED AT PALM BEACH PIER CALMS ARE OMITTED.

517 DASERVATIONS SUMMARY FOR OCT 59 OCT 60 OCT 61 PERIOD HEIGHT (FT) (SECS) 1000 .00 1000 .00 1000 .00 .0 - 1.9 2.0 - 2.4 2.5 - 2.9 5.0 - 3.4 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.0 8.0 - 8.9 9.0 - 9.9 12.0 - 12.9 13.0 - 12.9 14.0 - 14.0 TOTAL CUM. TOTAL CUM. TOTAL *1.7 *2.5 *3.3 *4.1 *4.9 *5.7 *6.5 *7.3 TOT.* 1000 .00 1000 .00 1000 .73 939 1.16 649 1.67 723 2.10 529 2.80 443 2.26 363 2.04 233 1.90 130 2.01 78 1.73 50 2.28 6 4.75 1.82 90 2 15 52 21 17 27 2 19 19 12 6 4 12 35 35 17 8 44 27 12 15 44 126 193 86 80 130 103 53 27 43 19 19 19 19 31 2 2 14 8 19 15 10 2 12 8 14 4 5 2 36 2 17 27 5 246 1000 6.06* 277 754 6,39 147 267 7,25 211 478 7.45 60 33 7.97 COL. AVG. AVERAGE SIG. HEIGHT # 1.84 FT VAHIANCE OF SIG. HEIGHT # 1.58 FT SQ STANDARD DEVIATION OF HEIGHT # 1.26 F AVFRAGE AVERAGE WAVE PERIOD # 6.93 SEC*
VARIANCE OF WAVE PERIOD # 6.99 SEC 80*
STANDARD DEVIATION OF PERIOD # 2.64 SEC*

1.26 FT

505 ORSERVATIONS SUMMARY FOR NOV 59 NOV 60 NOV 61
PERIOD HEIGHT (FT)

PERIOD HEIGHT (FT)

1

CUM. HOM-TUT. AVG. 4 1000 .00 1000 .43 996 .63 990 .75 949 1.29 885 2.16 706 2.78 362 1.95 249 2.39 158 2.60 93 2.81 53 3.02 22 4.07 6 3.13 2.34 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 4.0 - 7.9 6.0 - 6.9 7.0 - 7.9 9.0 - 9.9 10.0 - 11.9 12.0 - 12.9 13.0 - 13.9 TOTAL CUM. TOTAL CUM. TOTAL ·1.7 ·2.5 ·3.5 ·4.1 ·4.9 ·5.7 ·6.5 ·7.3 for.* 12 40 65 178 209 136 73 132 10 46 26 20 40 18 12 24 26 20 26 16 4 2 12 38 20 4 10 12 4 2 2 2 2 20 51 30 6 50 10 14 8 4 40 30 5 16 250 611 6.60 137 186 1000 863 4.93* 6.18 198 428 6.83 71 18 10

AVERAGE SIG. MEIGHT = 2.36 FT

VARIANCE OF SIG. MEIGHT = 1.74 FT SQ

STANDARD DEVIATION OF MEIGHT = 1.52 FT

AVERAGE WAVE PERIOD = 6.57 SEC*

VARIANCE OF NAVE PERIOD = 5.45 SEC*

STANDARD DEVIATION OF PERIOD = 2.34 SEC*

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE MAYE GAGE LOCATED AT PALM HEACH PIER

CALMS ARE OMITTED.

272 OBSERVATIONS SUMMARY FOR DEC 59 DEC 61 PERIOD (SECS) HEIGHT (FT) 1000 .00 1000 .00 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 6.0 - 6.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 14.9 TOTAL CUM. TOTAL CUM. TOTAL 0-.9 *1.7 *2.5 *3.3 *4.1 *4.9 *5.7 *6.5 TOT.* 1000 .00 1000 .14 966 1.47 939 2.45 742 2.94 534 2.88 413 2.57 254 3.00 129 3.99 72 3.06 57 3.06 57 3.06 54 4.47 19 4.48 15 4.88 15 11 34 27 197 208 121 159 125 57 15 22 29 11 4 4 4 51 107 15 22 18 18 48 33 26 51 33 29 57 37 15 22 18 26 33 11 4 11 7 11 923 206 787 6.36 581 581 6.01 162 349 6.77 29 1000 8.62 12.00

AVERAGE SIG. HEIGHT # 2.77 PT VARIANCE OF SIG. HEIGHT # 1.69 PT SQ STANDARD DEVIATION OF HEIGHT # 1.50 FT

AN THE STATE OF THE PARTY OF THE STATE OF TH

AVERAGE WAVE PERIOD = 6.71 SEC*
VARIANCE OF WAVE PERIOD = 5.20 SEC SQ*
STANDARD DEVIATION OF PERIOD = 2.28 SEC*

4890 DASERVATIONS SUMMARY FOR 31 MONTHS JAN 59 THROUGH PEB 62 PERIOD HEIGHT (FT) (SECS) 0-.9 e1.7 e2.5 e3.5 e4.1 e4.9 e5.7 e6.5 e7.3 e8.1 TOT.*

95

6

3

47 26 6

37 38 18 4

107

22 36 51 36 14 3 1

179

13 22 30 39 25 18 5 2

167

9 17 12 12 12 12 12 8 2

94

11 19 15 6 5 4 1 1

67

11 22 25 17 10 6 3 1 CU". ROM
TOT. AVG.*

1000 1.24

1000 .43

990 .82

902 1.15

795 2.03

616 2.58

449 2.79

355 2.00

113 2.72

68 2.85

37 3.04

16 3.11

10 3.50

3 4.88

2 5.01

2.00 2.0 - 2.4 2.0 - 2.4 3.0 - 3.4 3.5 - 3.4 5.0 - 5.9 6.0 - 6.9 7.0 - 7.0 8.0 - 8.9 9.0 - 9.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 15.0 - 15.9 16.0 - 16.9 TUTAL CUM. TOTAL CUL. AyG. 3 88 107 179 167 94 67 105 70 45 31 21 26 38 36 22 17 19 22 14 8 4 3 6 18 51 30 12 13 25 16 9 36 39 12 6 17 12 9 6 5 14 25 12 5 10 8 6 4 3 11 4 3 1 1 6533212 1 189 524 6.51 85 188 7.27 263 213 1000 737 4.91* 6.08 147 335 6.89 103 7.78 AVERAGE SIG. HEIGHT # 2.02 FT VARIANCE OF SIG. HEIGHT # 2.05 FT SQ STANDARD DEVIATION OF HEIGHT # 1.45 FT AVERAGE WAVE PERIOD = 6.42 SECP VARIANCE OF WAVE PERIOD = 7.13 SEC SQ* STANDARD DEVIATION OF PERIOD = 2.67 SEC*

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK PECORDS TAKEN WITH A STEP RESISTENCE WAVE GAGE LOCATED AT PALM BEACH PIER . CALMS ARE OMITTED.

1

THE RESERVE THE PARTY OF THE PA

Table A-34. Comparison of results from different pen and ink wave record analysis methods, Palm Beach, Florida.

Dates of	Significant	heigh	ts1	Significant periods ²					
data sample reanalyzed by CERC method	Correlation between heights	A (ft)	В	Correlation between periods	C (s)	D			
Feb. 1960	0.91	0.04	0.81	0.77	1.07	0.83			

¹Significant height from the CERC method

= $A + B \times (significant height from old method)$.

²Significant period from the CERC method

= $C + D \times (significant period from old method)$.

Table A-35. Regression equations used to compensate significant height statistics for Palm Beach, Florida.

Year	Compensation equations (ft								
1959 to 1962	$H_{NEW} = 0.04 + 0.81 H_{OLD}$								

NOTE:

H_NEW = estimate of significant height
 that would have been obtained by
 the CERC method of pen and ink
 record analysis.

 H_{OLD} = significant height obtained by old method of pen and ink record analysis.

Table A-36. CERC wave gage history for Lake Worth Municipal Fishing Pier, Lake Worth, Florida.

		Pier Length (feet)	800	800	800					
	LOCATION: Lake Worth Municipal Fishing Pier, Lake Worth, Florida	Distance from seaward end of pier	0 (on north side side of pier)	0	0					
	shing Pier, L	Water Depth (ft MSL)	18	18	18					
	th Municipal Fis	Gage Range (ft MSL)	-5 to +15	-5 to +15	-5 to +15					
	Lake Wort	Gage Length (feet)	20	20	20					
	LOCATION:	Explanation	20 Jan. 1966;27 May 1971 Gage removed; pier being rebuilt.	Continuous-wire staff 22 Jan. 1973 11 Feb. 1973 Gage damaged by storm.	3 Aug. 1973 24 Aug. 1973 Electronics not working properly.	14 Nov. 1973 22 Feb. 1974 Electronics not working properly.	1 June 1974 14 June 1974 Gage struck by lightning.	20 Sept.1974 1 Oct. 1974 Gage struck by lightning.	11 Oct. 1974 18 Mar. 1975 Gage discontinued.	
	ν.	End of Proper Operation	27 May 1971	11 Feb. 1973	24 Aug. 1973	22 Feb. 1974	14 June 1974	10ct. 1974	18 Mar. 1975	
4 47	37' N., 80°02' N	Beginning of Proper Operation	20 Jan. 1966	22 Jan. 1973		14 Nov. 1973	1 June 1974	20 Sept.1974	11 Oct. 1974	
CERC Form 174-74 18 Mar 74	COURBINATES: 26°37' N., 80°02' W.	Type of Gage	Step-resistance, staff-relay type	Continuous-wire staff	Continuous-wire staff					

Table A-37. Number of analyzed records from Lake Worth, Florida. 1

YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NBV	DEC	тот
1966	68	157	184	178	165	164	170	174	111	38	177	165	1751
1967	185	167	186	151	182	149	165	89					1274
1968												88	88
1969	100	108	99	71	87	67	109	117	107	59			924
1970													
1971			40	110	88								238
1972													
1973	28	36						44			58	42	208
1974	94	64				10			26	60	109	113	476
1975	97												

¹Results before November 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the CERC method. Results after November 1968 obtained from 1,024-second digital records taken four times daily.



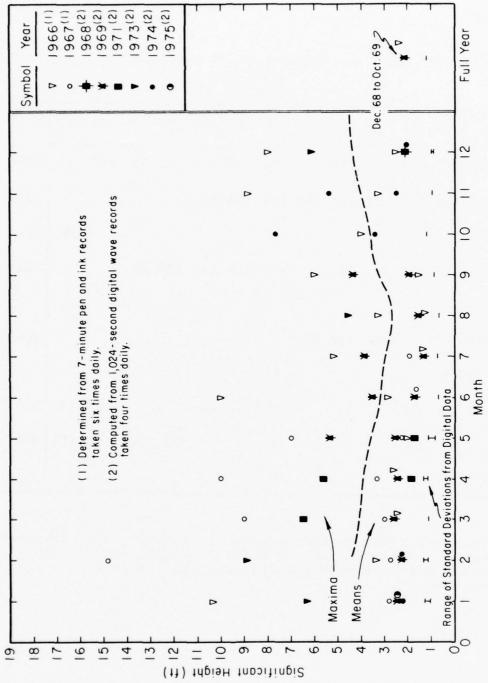


Figure A-58. Maxima, means, and standard deviations of significant height from Lake Worth, Florida.

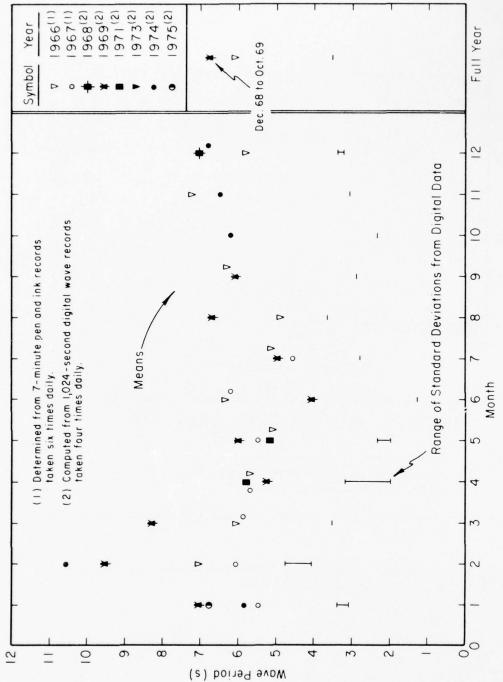

10 m

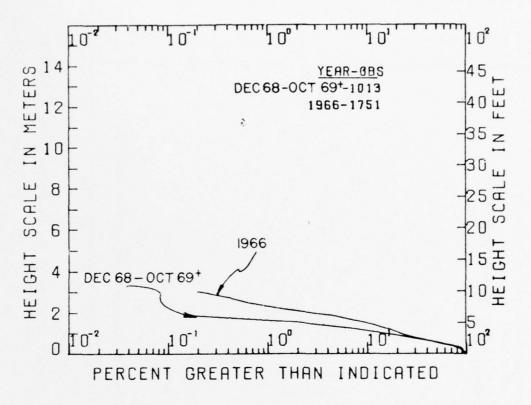

NOTE:

= computed from 1,024-second digital wave records taken four times daily.

Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-60. Annual cumulative significant height distributions from Lake Worth, Florida.

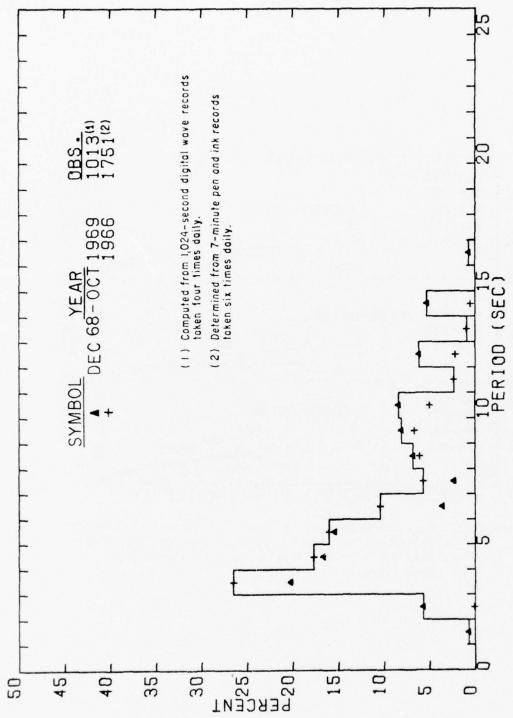


Figure A-61. Annual significant period distributions from Lake Worth, Florida.

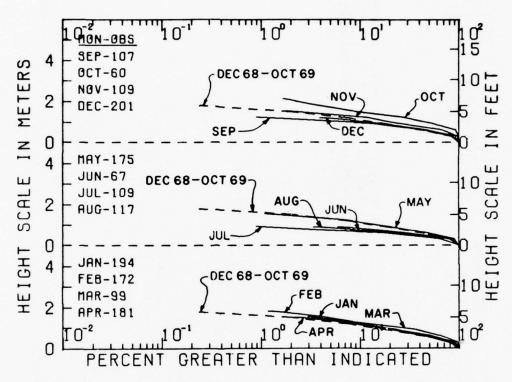


Figure A-62. Seasonal summaries of cumulative significant height distributions from Lake Worth, Florida; computed from 1,024-second digital wave records taken four times daily.

Table A-38. Wave climate for Lake Worth, Florida.

Distribution of significant height versus period
(in observations per 1,990 observations).

194 0	SERVATIONS		8	UMMARY	FOR J	AN 64	JAN 74			
PERIOD (SFCS)				81G.	HEIGH	T (FT)				
				•	4-5		101.	CUM.	ROM AVG.	
	0-1	1-5	5-3	3-4	4.5	200	101.	1000	0.00	
0.09								1000		
1.0 - 1.9							62			
5.0 - 5.4		57		5			134			
3.0 - 3.9	15	37	. 57	52			253	804		
4.0 - 4.9	26	36	139	77	26	10	175		3.26	
5.0 - 5.9	,	15	41	"	51	10	46		4.06	
6.0 - 6.9	5		,	5		10	41		1.63	
7.0 - 7.9	15	31		,	,	10	67		2.35	
			15	9	•		72		1.43	
9.0 - 9.9	21	41	15	,			57		1.59	
10.0 -10.9	10	31	1.5				31	• • • • •		
11.0 -11.9	5	26	•				36	• • • • • • • • • • • • • • • • • • • •		
12.0 -12.9	,		•				,,,	37	0.00	
13.0 -13.0		46					46		1.50	
14.0 -14.9		••					••	10		
15.0 -15.0	,						5	10		
16.0 -16.9	,						,	.,	0.00	
17.0 -17.9								ś		
								ś		
19.0 -19.9		5					5	ś		
20.0 -20.4		,					,	,	0.00	
\$1.0 +				149	52	31			2.26	
TOTAL	108	371	584		95	31				
CUM. TOTAL	1000	598	521	535						
COL. AVG.	7.60	7.67	5.21	5.33	6.20	6.63	6.50			

AVERAGE SIG. HEIGHT # 2.29 FT AVERAGE HAVE PERIOD # 6.48 SEC VARIANCE OF HAVE PERIOD # 10.99 SEC 808 STANDARD DEVIATION OF HEIGHT # 1,13 FT STANDARD DEVIATION OF PERIOD # 3.32 SEC

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE NAME GAGE LOCATED AT MUNICIPAL FISHING PIER.

* CALMS ARE OMITIED.

		17	5	OBSE	RVATIONS	3	3	UMMARY	FOR F	EB 69	FEB 74			
	PI	ERI	00)				31G	. HE I GH	1T (FT)			
	(SEC	(5)											
													CUM.	RO.
					0-1	1-5	5.3	3-4	4-5	5-6	6-7	TOT. *	TOT	AVG.
	• 0												1000	
	• 0	•	1.										1000	
		•	5.		6	5.3	17 17					35	1000	
	• 0				17	81	17					105	965	
	• 0				17	6		6				47	860	1.75
		•				15	6	29	6	17	6	76	814	
		•				53		12				35		2.17
	. 0					35		6				41		1.79
		•			6		17	17	6			41		2.79
	• 0				12	58	35	6		6		116		5.00
	• 0				15	58	6	6	6			8.7	506	1.77
	. 0													0.00
	. 0					87	41	53	15			163		2.25
	.0													0.00
14	. 0	- 1	4 .	9	12	47	64	12	35	6	6	180		2.79
	. 0												76	0.00
16	. 0	- 1	6.	9		41	6					47	76	1.63
17	. 0	- 1	7 .	9									5.0	0.00
	. 0												5.0	0.00
19	. 0	-1	9.	9									5.4	0.00
20	. 0	- 2	0.	9		23	6					29	50	1.70
21	. 0	+												0.00
TO	TAL				70	494	155	110	64	50	12			2.24
CU	M .	10	17	-	1000	930	436	215	105	41	15			
CO	L.	4	G.		8.08*	9.96	10.76	8.87	12.41	A.10	10.00	9.99		

AVERAGE SIG. HEIGHT = 2.24 FT VARIANCE OF SIG. HEIGHT = 1.46 FT SQ STANDARD DEVIATION OF HEIGHT = 1.21 FT AVERAGE WAVE PERIOD # 4.44 SEC*
VARIANCE OF WAVE PERIOD # 14.13 SEC SQ*
STANDARD DEVIATION OF PERIOD # 4.37 SEC*

SUMMARY FOR MAR 69 99 OBSERVATIONS PERIOD BIG. HEIGHT (FT) (SECS) CUM. HUM

1000 0.00
1000 0.00
1000 0.00
1000 0.50
30 990 2.50
121 960 3.25
253 838 3.42
61 586 2.83
20 525 3.00
111 505 1.86
61 394 2.50
91 333 1.94
242 0.00 4-5 0-1 1-2 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.1 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 20 30 20 20 30 10 20 10 20 10 30 20 242 0.00 51 51 10 111 12.0 -12.9 13.0 -13.9 14.0 -14.9 15.0 -15.9 16.0 -16.9 TOTAL CUM. TOTAL COL. AVG. 131 0.00 10 0.00 10 283 657 10 30 313 283 1000 970 657 8.17* 9.27 10.57 263 374 6,23 8.40

AVERAGE SIG. HEIGHT = 2.61 FT AVERAGE HAVE PERIOD = 8.33 SEC*
VARIANCE OF SIG. HEIGHT = 1.21 FT SQ VARIANCE OF HAVE PERIOD = 12.41 SEC SQ*
STANDARD DEVIATION OF HEIGHT = 1.10 FT STANDARD DEVIATION OF PERIOD = 3.52 SEC*

RESULTS OBTAINED FROM 1024-5FCOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE WAYE GAGE LOCATED AT MUNICIPAL FISHING PIER.

* CALMS ARE OMITTED.

181 0895	RVATIONS	5	S	UMMARY	FOR A	PR 69	APR 71		
PERTOD				SIG.	HEIGH	T (FT)			
(SECS)									
								CUM.	ROW
	0-1	1-2	2-3	3.4	4.5	5.6	TOT	TOT	AVG.
0.09								1000	0.00
1.0 - 1.9	6	6					11	1000	
2.0 - 2.9	72	55	6				133		1.00
3.0 - 3.9	17	138	72	6			535	856	1.79
4.0 - 4.9	11		110	11	6		138	624	2.50
5.0 - 5.9	28	11	5.5	77	55	17	510	486	3.32
6.0 . 6.9	6	11		6	6	6	33	276	2.45
7.0 - 7.9	11	11					25	243	1.00
8.0 - 8.9	28	17	6	6			55	155	1.50
9.0 - 9.9	33	26	17	11			88	166	1.50
10.0 -10.9	11	5.5		6			59	77	1.50
11.0 -11.9								39	0.00
12.0 -12.9	6	6	17				85	39	1.90
13.0 -15.9								11	0.00
14.0 -14.9	6	6			•		11	11	1.00
TOTAL .	232	309	540	155	66	55			2.05
CUM. TOTAL	1000	768	459	210	8.8	5.5			
COL. AVG.	5.950	5.27	5.21	6.09	5.50	4.75	5.54		

AVERAGE SIG, MEIGHT # 2.08 FT

VARIANCE OF SIG, MEIGHT # 1.52 FT SQ

STANDARD DEVIATION OF MEIGHT # 1.23 FT

STANDARD DEVIATION OF MEIGHT # 1.23 FT

THE CONTRACT OF THE PARTY OF TH

1

COL, AVG. 6,31° 5,97 5,04 4,98 5,41 5,50 5.57

AVERAGE SIG. HEIGHT = 2,15 FT

VARIANCE UP SIG. HEIGHT = 1,11 FT SG

STANDARD DEVIATION OF MEIGHT = 1,05 FT

STANDARD DEVIATION OF PERIOD = 2,22 SEC.

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE WAVE GAGE LOCATED AT MUNICIPAL FISHING PIER.

P. CALMS ARE OMITTED.

67 085E	RVATION	3	8	UMMARY	FOR J	UN 69	
PERIOD (SECS)				51G.	HF I GH	T (FT)	
(3553)							
			1	4-4	101.	CUM.	AVG. *
0.09	0 = 1	1-2	5-3	3-4	101.		0.00
1.0 - 1.9		45			45		1.50
2.0 - 2.9		90	15		104		1.64
3.0 - 3.9	60	284	90		433		1.57
4.0 - 4.9	15	104	75	30	224		2.03
5.0 - 5.9		75	45	15	134	194	2.06
6.0 - 6.9		15		•	15	60	1.50
7.0 - 7.9				15	15	45	3,50
8.0 - 8.9	15	15			30	50	1.00
TOTAL	90	627	224	60			1.75
CUM. TOTAL	1000	910	584	60			
COL. AVG.	4.50*	3.81	4.17	5.50	4.05		
AVERAGE SIG.	HEIGHT :	1.7	2 FT			VFRAGE	MAVE PERIOD . 4.09 SEC.
VARIANCE OF S	IG. HEI	GHT .	.44	FT 50			E OF MAVE PERIOD . 1.65 SEC SU.
STANDARD DEVI							D DEVIATION OF PERIOD . 1.29 SEC

109 OBSERVATIONS SUMMARY FOR JUL 69 PERTOD (SECS) SIG. HEIGHT (FT) 3-4 TOT. - TOT. - AVG. -0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 TOTAL CUM. TOTAL COL. AVG. 1-7 203 9 119 229 28 28 18 55 64 9 28 28 174 404 83 64 28 9 73 64 55 110 64 37 18 9 28 37 18 349 1000 18 477 651 4.33 165 174 3.89 6.16. 4.90

AVERAGE SIG. HEIGHT # 1.37 FT AVERAGE HAVE PERIOD # 4.95 SEC*
VARIANCE OF SIG. HEIGHT # .46 FT SG VARIANCE OF WAVE PERIOD # 7.82 SEC SG#
STANDARD DEVIATION OF MEIGHT # .68 FT STANDARD DEVIATION OF PERIOD # 2.80 SEC*

RESULTS OBTAINED FROM 1024-SECUND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE WAVE GAGE LOCATED AT MUNICIPAL FISHING PIER.

CALMS ARE OMITTED.

	1	1 7	0	BSFRVATIONS	s	S	UMMARY	FOR AL	IG 69	
PI	ER	100	,				31G.	HEIGHT	(FT)	
		C S								
									cum.	RUM
				0-1	107	2.3	3-4	101.	101.	AVG
0.0			. 9		1.00.000.00	***************************************	-		1000	0.00
		1							1000	0.00
2.0				9	43	9		60	1000	1.50
3.0				17	162	68	9	256	940	1.77
4.0				26	94	60	26	205	684	1.92
5.0				17	9	34		60	479	1.79
6.0				9	•			17	419	1.00
7.0									402	0.00
8.0				9	43			51	402	1.35
9.0				51	94			145	350	1.15
10.0				43	68	9		120	205	1.21
11.0				Lance of Marie State					85	
12.0				9	17			26	85	1.17
15.0					•			-	60	0.00
14.0				9	34			43	60	1.50
15.0									17	0.00
16.0				9	9			17	17	1.00
TOTAL				205	581	179	34	•		1.54
CUM.		01	AL	1000	795	214	34			
COL.				8.42*		4.50	4.25	6.71		

AVERAGE SIG. HEIGHT # 1.56 FT VARIANCE OF SIG. HEIGHT # .42 FT 80 STANDARD DEVIATION OF HEIGHT # .64 FT

CONTRACTOR TO THE PARTY OF TAXABLE PARTY.

AVERAGE WAVE PERIOD # 6.71 SEC*
VARIANCE OF WAVE PERIOD # 13.45 SEC SQ*
STANDARD DEVIATION OF PERIOD # 3.67 SEC*

107 DBSFRVATIONS SUMMARY FOR SEP 69 PERIOD SIG. HEIGHT (FT) (SECS) 485 101. TOT. AVG. 0.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 TOTAL CUM. TOTAL COL. AVG. 707. Avg.*
1000 0.00
1000 .50
991 1.50
935 1.68
738 2.10
458 2.77
357 1.50
318 1.25
243 1.23
140 1.83
28 0.00
28 3.17 0-1 2-3 3-4 1.5 56 196 280 103 84 93 28 19 37 56 28 103 28 9 75 37 9 9 103 9 19 28 168 393 1000 832 7,220 5,64 299 131 1.92

AVERAGE SIG. HEIGHT # 1.95 FT AVERAGE HAVE PERIOD # 6.11 SEC*
VARIANCE OF SIG. HEIGHT # .73 FT SQ VARIANCE OF MAVE PERIOD # 6.32 SEC SQ*
STANDARD DEVIATION OF MEIGHT # .86 FT STANDARD DEVIATION OF PERIOD # 2.88 SEC*

RESULTS OBTAINED FROM 1024=SECOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE MAYE GAGE LOCATED AT MUNICIPAL FISHING PIFR.

CALMS ARE OMITTED.

60 08SE	RVATION	3		SUMMARY	FOR O	c† 74						
PERIOD				91G.	HEIGH	T (FT)						
(SECS)												
										CUM.	HUW	
	0-1	1-5	2.3	3-4	4-5	5-6	6-7	7-8	TOT. *	TOT.	AVG.	
0.09										1000	0.00	
1.0 - 1.9										1000	0.00	
2.0 - 2.9										1000	0.00	
3.0 - 3.9		17	33						50		2.17	
4.0 - 4.9			217	33	17				267	950	2.75	
5.0 - 5.9		17	83	200	100				400	683	3.46	
6.0 - 6.9			83 17	17	•	17		17	67	283	4.75	
7.0 - 7.9								* *			0.00	
A.0 - 8.9		17		17	17	17	17		83		4.30	
9.0 - 9.9		•		•	•	17	• •		17		5.50	
10.0 -10.9					67	• •			67		4.50	
11.0 -11.9					•				•		0.00	
12.0 -12.9			33						33		2.50	
13.0 -13.9			,,						,,		0.00	
14.0 -14.9		17							17	17		
TOTAL		67	383	24.0					1,	1,		
CUM. TOTAL				267	500	50	17	17			3.40	
	1000	1000	933	550	583	83	33	17				
COL. AVG.	0.00	8.00	5.41	5,63	7.33	8.17	8.50	6.50	6.23			

AVERAGE SIG. HEIGHT # 3.37 FT VARIANCE OF SIG. HEIGHT # 1.42 FT SQ STANDARD DEVIATION OF HEIGHT # 1.19 FT AVERAGE WAVE PERIOD # 6.23 SEC*
VARIANCE OF WAVE PERIOD # 5.67 SPC SQ*
STANDARD DEVIATION OF PERIOD # 2.38 SEC*

AVERAGE SIG. HEIGHT # 2.50 FT AVERAGE HAVE PERIOD # 6.51 SEC*
VARIANCE OF SIG. HEIGHT # .98 FT SQ VARIANCE OF HAVE PERIOD # 9.61 SEC SQ*
STANDARD DEVIATION OF MEIGHT # .99 FT STANDARD DEVIATION OF PERIOD # 3.10 SEC*

RESULTS OBTAINED FROM 1024=SECOND DIGITAL RECORDS TAKEN WITH A STEP RES, AND CONT. WIRE MAYE GAGE LOCATED AT MUNICIPAL FISHING PIER.

• CALMS ARE OMITTED.

201 085EF	RVATION	3	8	UMMARY	FOR (PFC 68	DEC 74	
968180				916.	HEIGH	HT (FT)		
(SECS)								
							CUM.	ROW
	0-1	1-2	2.5	3-4	4-5	TOT	TOT	AVG
0.09							1000	0.00
1.0 - 1.9							1000	0.00
2.0 - 2.9	5	35				40	1000	1.38
3.0 - 3.9	10	50	65	10		134	960	2.06
4.0 - 4.9		55	95	45	10	204	826	2.55
5.0 - 5.9	15	35	45	50	30	174	559	2.76
6.0 - 6.9	5	20	5	•		30	448	1.50
7.0 - 7.9	10	30				40	418	1.25
8.0 - 8.9	20	70	35	10		134	378	1.76
9.0 - 9.9		15	20	15		50	244	2.50
10.0 -10.9	10	55	15			80	194	1.55
11.0 -11.9							114	0.00
12.0 -12.9		45	15			60	114	1.75
13.0 -13.9							55	0.00
14.0 -14.9		30	10			40	55	1.75
15.0 -15.9							15	0.00
16.0 -16.9		15				15	15	1.50
TOTAL	75	453	303	129	40			2.11
CUM. TOTAL	1000	925	413	169	40			
COL. AVG.	6.83*	7.95	6.27	5.69	5.25	6,96		

AVERAGE SIG. HEIGHT # 2.06 FT AVERAGE MAVE PERIOD # 6.95 SLC*
VARIANCE OF SIG. HEIGHT # .80 FT SG VARIANCE OF WAVE PERIOD # 11.07 SEC SQ*
STANDARD DEVIATION OF HEIGHT # .92 FT STANDARD DEVIATION OF PERIOD # 3.33 BEC*

SUMMARY FOR 17 MONTHS DEC 68 THROUGH DEC 74 1591 OBSERVATIONS PERIOD (SECS) SIG. HEIGHT (FT) TOT. - AVG. -6-7 7-8 TUT. . 1-2 203 3-4 4-5 5-6 1000 0.00 1000 1.10 994 1.30 928 1.80 745 2.38 564 3.69 389 2.50 353 1.67 178 1.75 110 0.00 110 2.06 58 2.19 13 0.00 13 1.50 4 0.00 0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 15.0 - 15.9 16.0 - 16.9 17.0 - 17.9 18.0 - 18.9 19.0 - 18.9 19.0 - 19.9 20.0 - 20.9 102 182 61 89 41 32 3 1 5 181 23 3 14 36 26 75 74 68 1214 33 11 14 3 4 25 15 1 52 3 23 13 2 45

7

3

272

124 409 1000 876 6.80* 6.91

Z1.0 + TOTAL CUM. TOTAL COL. AVG.

AVERAGE SIG. HEIGHT = 2.13 FT AVERAGE WAVE PERIOD = 6.61 SEC*
VARIANCE OF SIG. HEIGHT = 1.20 FT SG VARIANCE OF WAVE PERIOD = 12.15 SLC SG*
STANDARD DEVIATION OF MEIGHT = 1.10 FT STANDARD DEVIATION OF PERIOD = 3.49 SEC*

4 0.00 4 0.00

2.13

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE MAYF GAGE LOCATED AT MUNICIPAL FISHING PIER.

* CALMS ARE OMITTED.


5830 088E	RVATION	•		UMMARY	FOR 1	7 HONTE	IS PE	B 66 TH	LOUGH J	TL 67							
PERIOD (SECS)				HEIG	HT (FT	,											
																CUM.	ROM
	0-1	1-2-	2 - 3	3.4	4-5	5-0	6-7	7-8	8-4	9-10	10-11	11-12	12-13	13 .	TOT		AVG.
.0 - 1.4	21															1000	.00
2.0 - 2.4																1000	3.50
2.5 . 2.9																	.00
3.0 - 3.4	.5	•3	16												155		1.32
3,5 - 3,9	13		45	•	1										153		1.85
4.0 - 4.4	10	65	45 68 20	45	10	1									201		2.40
5.0 - 5.4	10	27	5.0	36	31	12	5	1							151		3.20
6.0 - 6.4	7	14	7	7	16	10	15	•							88		4.16
7.0 - 7.0	•	17	•	5	3	5	•	1		1					47		3.35
6.0 - 6.4	13	53	•	1	1	5	1	1	1						53		2.08
4.0 - 4.4	14	25	15	3	1	1	1			1					• 1		1.98
10.0 -10.4	•	19	11	3		1									44		1.96
11.0 -11.9	•	•	•	1	1		1	1							50		2.37
12.0 -12.4		•	•			1	1								10		3.45
13.0 -13.0		. 5	,		1									1	•		4.23
14.0 -14.4						. !	27	. 1							•	•	6.00
TOTAL	146	379	515	100		43	47	11	•		1			1			2.41
CUM. TOTAL	1000	852	473	192	154	•0		7.62				!		!			
COL. AVG.	9.890	5.47	5.70	5.50	5.44	7.30	8.03	7.65	8.50	6.51	10.83	12.50	.00	13,30	5,02		

AVERAGE BIG. MEIGHT . 2.40 FT VARIANCE OF SIG. MEIGHT . 2.79 FT SQ STANDARD DEVIATION OF MEIGHT . 1.67 FT AVERAGE WAVE PERIOD # 5.02 SEC **
VARIANCE OF WAVE PERIOD # 6.54 SEC SDO
STANDARD DEVIATION OF PERIOD # 2.56 SEC* RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTENCE RELAY NAVE GACE LOCATED AT MUNICIPAL FISHING PIER .

• CALMB ARE OMITTED.

APPENDIX A-2

SIGNIFICANT WAVE HEIGHT AND PERIOD SUMMARIES, U.S. GULF COAST

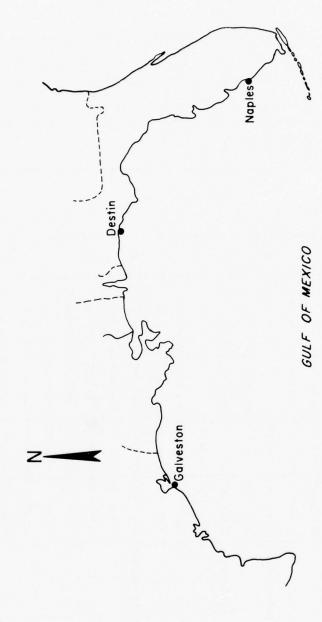

,

Figure A-63. Location of BEB-CERC wave gages along the U.S. gulf coast.

Table A-39. CERC wave gage history for Municipal Pier, Naples, Florida.

	18 Mar 74							
COORDINATES: 26°08' N., 81°49' W.	°08' N., 81°49'	ъ.	LOCATION:	Municipal	LOCATION: Municipal Pier, Naples, Florida	orida		
Type of Gage	Beginning of Proper Operation	End of Proper Operation	Explanation	Gage Length (feet)	Gage Range (ft MSL)	Water Depth (ft MSL)	Distance from seaward end of pier	Pier Length (feet)
Step-resistance (SR),		4 June 1957 16 May 1958		20		17	0	006
11-paramet type	15 July 1958		9 Feb. 1959 Lack of funds.					
	8 June 1959		1 Aug. 1960 Gage destroyed by hurricane.					
SR staff-parallel type	24 Oct. 1961	8 Feb. 1966		20		17	0	006
	25 Mar. 1966		6 June 1967 Gage hit by submarine.					
SR staff-relay type	25 Oct. 1967	20 Oct. 1969	25 Oct. 1967 20 Oct. 1969 Pier being repaired.	15	-4 to +11	17	0	006
	16 Feb. 1970 21 Sept.1970	21 Sept.1970						
	26 Oct. 1970	2 Aug. 1971	26 Oct. 1970 2 Aug. 1971 Gage struck by lightning.					
	9 Sept.1971	9 Sept.1971 17 July 1972	Gage damaged by vandals.					
Continuous-wire staff	25 July 1972 22 Aug. 1972	22 Aug. 1972	Gage struck by lightning.	15	6+ ot 9-	18	0	006
	19 Sept.1972	19 Sept.1972 16 Mar. 1973	Gage struck by lightning.					
	11 May 1973	11 May 1973 20 June 1973	Gage struck by lightning.					
	7 Aug. 1973	7 Aug. 1973 20 Aug. 1973	Gage struck by lightning.					
	13 Nov. 1973	13 Nov. 1973 8 Dec. 1973	Gage struck by lightning.					
	17 Jan. 1974	17 Jan. 1974 19 June 1974	Gage struck by lightning.					
	21 Sept.1974	21 Sept.1974 18 Mar. 1975	Gage discontinued.					

Table A-40. Number of analyzed records from Naples, Florida. 1

YR YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC	TOT
1957						116	147	186	103	183	177	157	1069
1958	124	138	131	43	93		97	171	186	185	180	186	1534
1959	186	50				132	123	144	112	186	180	164	1277
1960	186	158	184	178	186	176	186	3					1257
1961													
1962	176	139	180	180	183	177	185	185	175	186	180	186	2132
1963	185	163	178	179	184	177	173	185	177	141	180	186	2108
1964	184	174	186	179	186	180	186	186	72	184	177	186	2080
1965	184	168	186	177	176	101	179	185	173	185	172	183	2069
1966	186	43	38	180	159	177	180	164	12	98	178	182	1597
1967	184	167	184	177	83								795
1968												92	92
1969	83	104	98	61	81	60	109	110	102	54			862
1970													
1971			32	94	88	71	56		35	87	76	81	619
1972	84				76	99	53	56		100	114	87	669
1973	89	66	26		64	52		30			37	13	377
1974	31	90	68	58	78	52			14	83	71	85	630
1975	78												

¹Results before November 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the second BEB method for 1957 to March 1964 and analyzed by the CERC method for April 1964 to 1967. Results after November 1968 obtained from 1,024-second digital records taken four times daily.

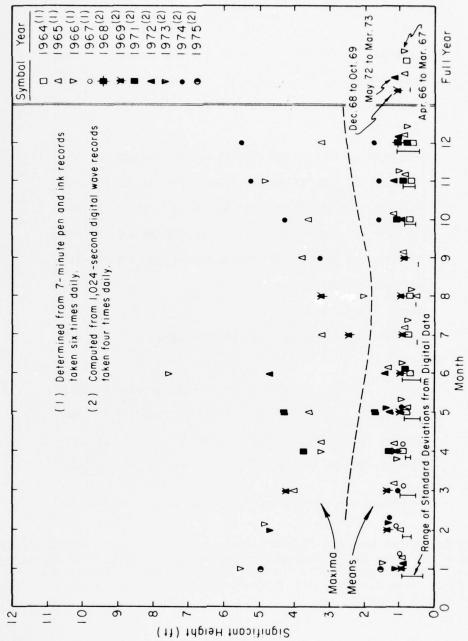


Figure A-64. Maxima, means, and standard deviations of significant height from Naples, Florida.


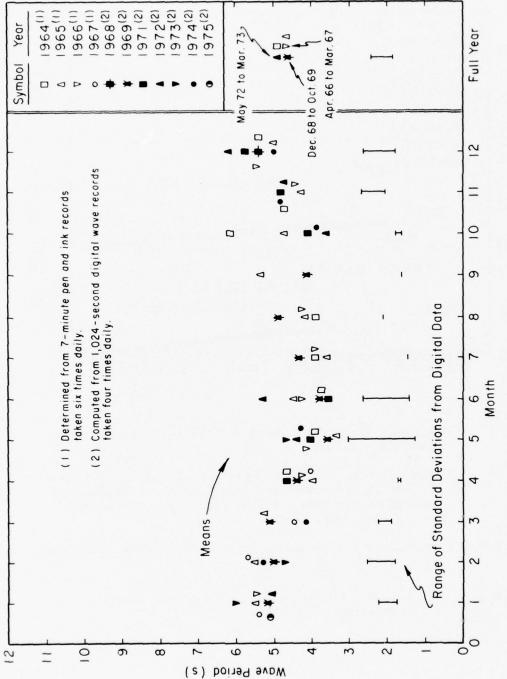



Figure A-65. Means and standard deviations of wave periods for Naples, Florida.

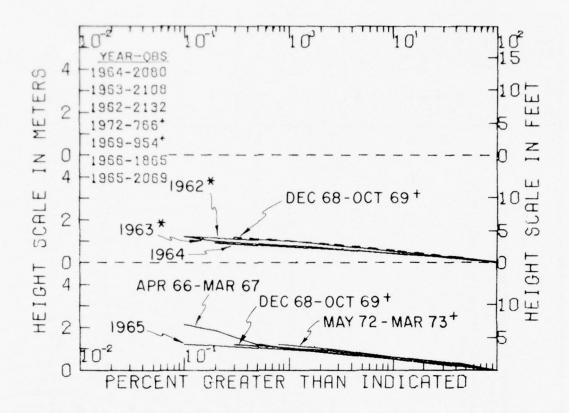


NOTE:

- = computed from 1,024-second digital wave records taken four times daily.
- = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Table A-42).
- Unmarked = determined from 7-minute pen and ink records taken six times daily.

Figure A-66. Annual cumulative significant height distributions from Naples, Florida.

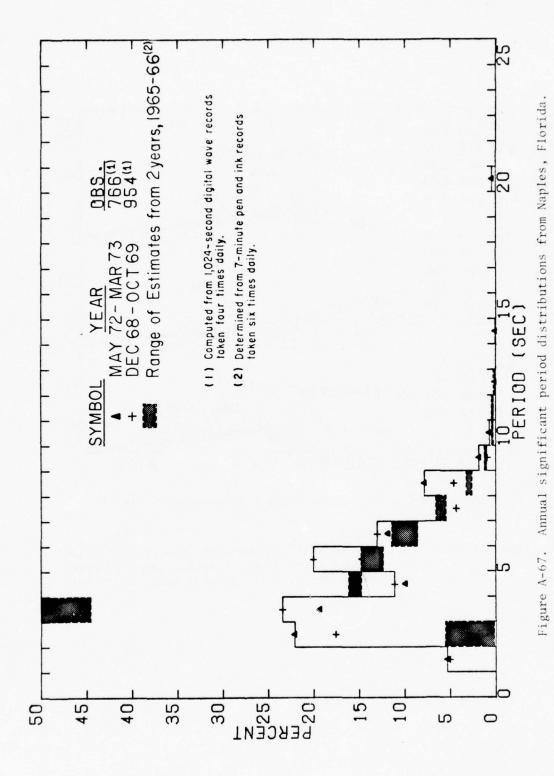

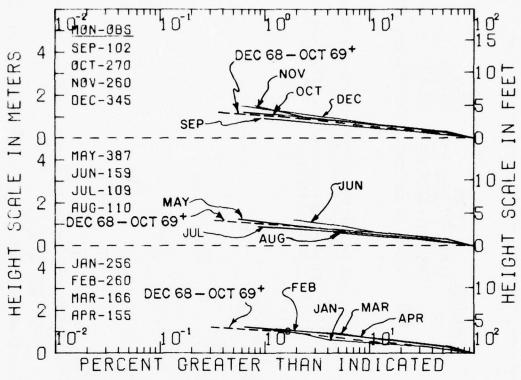

NOTE:

+ = computed from 1,024-second digital wave records taken four times daily.

Figure A-68. Seasonal summaries of cumulative significant height distributions from Naples, Florida; computed from 1,024-second digital wave records taken four times daily.

Table A-41. Wave climate for Naples, Florida.

Distribution of significant height versus perice
(in observations per 1,000 observations).

	256	098	ERVATIONS)		UMPARY	FOR J	AN 69	JAN 72	JAN 73
	ERIO					316.	HEIGH	T (FT)		
(:	9 E C S	,								
									cu4.	ROW
			0-1	1-2	2.3	3-4	4.5	TOT . *	TOT.	AVG.
0.0		. 9	39						1000	0.00
	- 1		15	4				41	1000	.60
	• 2		66	31				102	959	
	- 5		55	78	4			142	858	
	- 4		35	35	4	12		A9	715	
	- 5		180	55		• •	4	248	626	
	- 6		113	55			4	179	378	
	- 7		51	23	4			61	199	
8.0			51	27				81	118	
9.0			8		4			20	37	
10.0				4	4	4		12	16	
11.0				•					. 4	
								4		
15.0		. 4	4					4	•	.50
TOTAL			637	350	50	16	8			. 94
CUM.	TOT	AL	1000	363	43	23				
COL.	AVG		5.40*	5.29	7.10	6.00	6.00	5.41		

AVERAGE SIG. HEIGHT # .96 FT AVERAGE WAVE PERIOD # 5.40 SEC*
VANIANCE OF SIG. HEIGHT # .39 FT SQ VANIANCE OF WAVE PERIOD # 4.29 SEC SU*
STANDARD DEVIATION OF MEIGHT # .63 FT STANDARD DEVIATION OF PERIOD # 2.07 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES, AND CONT. WIRE WAVE GAGE LOCATED AT MUNICIPAL PIER.

CALMS ARE OMITTED.

- 590 0	BSERVATIONS		5	UMMARY	FOR F	FB 69	FEB 73	FEB 74
PERIOD (SECS)				81G.	HEIGH	(FT)		
	0-1	1-2	2=3	3-4	4-5	101.4	CUM. 101.*	ROW AVG.
0.09							1000	0.00
1.0 - 1.9	21	4				31	1000	.63
2.0 - 2.9	69	54	4			127	969	
3.0 - 3.9	46	150	27	4		227		1.45
- 4.0 - 4.9	62	23	42	12		138		1.55
5.0 - 5.9	61	69	35	15		204		1.50
6.0 - 6.9	42	46	8	4		100		1.23
7.0 - 7.9	31	31	8			69		1.17
8.0 - 8.9		58	4	4		81		1.45
9.0 - 9.9		4					23	
10.0 -10.9	4					4	15	
11.0 -11.9							15	
12.0 -12.9								.50
15.0 -13.9							4	0.00
14.0 -14.9							4	0.00
15.0 -15.9							4	0.00
16.0 -16.9						u	4	
TOTAL	392	438	127	35	6			1.35
CUM. TOTAL		608	169	42				
COL. AVG.		5.04	4.92	5,39	5,50	5.03		

AVERAGE SIG. HEIGHT = 1.33 FT AVERAGE HAVE PERIOD = 5.04 SEC SQUE STANDARD DEVIATION OF HEIGHT = .77 FT STANDARD DEVIATION OF PERIOD = 2.14 SEC

166 OBSERVATIONS SUMMARY FOR MAR 69 MAR 74

PERIOD (8FCS)

0-1 1-2 2-5 3-4 4-5 TOT. ** TOT. ** AVG. **

0.0 - .9

1.0 - 1.9

2.0 - 2.9

84 54

139 904 .89

3.0 - 5.9

84 78 48 6 217 765 1.39

4.0 - 4.9

18 36 18 18 90 548 1.90

5.0 - 5.9

6.0 - 6.9

6.0 - 6.9

6.0 - 72

12 18

169 458 1.39

6.0 - 8.9

12 42 6 60

72 1.2 18

8.0 - 8.9

12 42 6 60

72 1.2 18

8.0 - 9.9

TOTAL

458 392 96 48 6

COL. AVG. 4.05* 5.32 4.75 5.25 6.50 4.69

AVERAGE SIG, HEIGHT # 1,25 FT

VARIANCE OF SIG, HEIGHT # .68 FT SQ

STANDARD DEVIATION OF HEIGHT # .83 FT

AVERAGE WAVE PERIOD # 4,72 SEC*

VARIANCE OF WAVE PERIOD # 4,72 SEC*

VARIANCE OF WAVE PERIOD # 4,72 SEC*

VARIANCE OF WAVE PERIOD # 2,11 SEC*

	1	55 0	BSERVATION	5		BUMMARY	FOR	APR 69	APR 71
P	ER	100				81G.	HEIG	HT (FT)
(C8)							
								cum.	ROW
			0-1	1.2	2.3	3.4	*OT.	101.	AVG.
0.0	•	. 9						1000	0.00
1.0		1.9	32	6			39	1000	.67
2.0	-	2.9	17	77			155	961	1.00
3.0	•	3.9	65	116	84	15	277	806	1.66
4.0	•	4.9	65	32	19	13	148	529	1.63
5.0		5.9	97	45	6		148	381	.89
6.0		6.9	77	65	19		161	535	1.14
7.0		7.9	19	19			39	71	1.00
8.0	•	8.9	26		6		35	32	.90
TOTAL			458	361	135	45			1.27
CUM.	T	DTAL	1000	542	161	45			
COL.			4.71*	4.34	4.40	4.21	4.51		

AVERAGE SIG. HEIGHT = 1,24 FT AVERAGE MAVE PERIOD = 4,55 SEC*
VARIANCE OF SIG. HEIGHT = ,56 FT SQ VARIANCE OF WAVE PERIOD = 2,90 SEC 80*
STANDARD DEVIATION OF MEIGHT = ,79 FT STANDARD DEVIATION OF PERIOD = 1,70 SEC#

								CUM.	R() m
		0-1	1=2	2-3	3-4	4-5	TOT.	TOT.	
0.0	9	3		_				1000	0.00
1.0		59	3				41	1000	.50
	- 2.9	93	145	3			241	959	1.12
	- 3.9	106	150	57	13		326	718	1.43
	- 4.9	39	39	21		3	101	391	1.43
	- 5.9	83	57	10			155	290	1.07
	- 6.9	44	26	5		3	78	135	1.10
	- 7.9	18					56	57	.80
	- 8.9	3	13	8			53	31	1.72
	- 9.9							A	0.00
	-10.9	3					3	8	.50
	-11.9							5	0.00
	-12.9							5	0.00
	-13.9							5	0.00
	-14.9							5	0.00
	-15.9							5	0.00
	-16.9							5	0.00
	-17.9							- 5	0.00
	-18.9							5	0.00
	-19.9							5	0.00
	-20.9	5					5	5	.50
21.0									0.00
TOTAL		454	439	109	13	5			1.25
	TOTAL	1000	566	127	18	5			
COL.	AVG.	4.53*	3.90	4.45	3.50	5,50	4.15		

AVERAGE SIG. HEIGHT # 1.23 FT AVERAGE HAVE PERIOD # 4.16 SEC **
VARIANCE OF SIG. HEIGHT # .42 FT SG VARIANCE OF HAVE PERIOD # 4.06 SEC **
STANDARD DEVIATION OF HEIGHT # .65 FT STANDARD DEVIATION OF PERIOD # 2.01 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES, AND CONT. WIRE MAVE GADE LOCATED AT MUNICIPAL PIER.

* CALMS ARE OMITTED.

159 OBSE	RVATION	8	8	UMMARY	FOR .	JUN 69	JUN 72	2
PEH100 (SECS)				816.	HEIGH	47 (#1)		
							CUM.	RO.
	0-1	1-2	2.3	3-4	4.5	101.	TOT.	
0.09	6	•	-			207221 11.00	1000	0.00
1.0 - 1.9	19	31				51	1000	
2.0 - 2.9	69	62	6			158	949	
3.0 - 3.9	94	164	31	19		310	791	1.42
4.0 - 4.9	50	57	13	10		139	481	1.50
5.0 - 5.9	38	38	13	•		89	342	1.21
6.0 - 0.9	82	6			13	108	253	1.15
7.0 - 7.9	38	13				51	146	.75
8.0 . 8.9	50	19			6	76	95	1.08
9.0 - 9.9							19	0.00
10.0 -10.9							19	0.00
11.0 -11.9							19	
12.0 -12.9	6					6	19	
13.0 -13.9							13	0.00
14.0 -14.9	6					6		.50
15.0 -15.9							6	0.00
16.0 -16.9							6	0.00
17.0 -17.9							6	0.00
18.0 -18.9							6	0.00
19.0 -19.9							6	0.00
20.0 -20.0	6							.50
21.0 +								0.00
TOTAL	465	409	69	38	19			1.24
CUM. TOTAL	1000	535	126	57	19			
COL. AVG.	5.46*	3.87	4.23	4.00	7.17	4.70		

WAS MUST THE PART OF THE OR

AVERAGE SIG. MEIGHT # 1.23 FT AVERAGE NAVE PERIOD # 4.71 BEC*
VARIANCE OF SIG. MEIGHT # .66 FT SQ VARIANCE OF MAVE PERIOD # 5.43 SEC 30*
STANDARD DEVIATION OF MEIGHT # .81 FT STANDARD DEVIATION OF PERIOD # 2.44 SEC-

```
PERIOD (SECS)

CUM. MUM.

O-1 1-2 2-3 TOT.* TOT.* AVG.*

100 0.00

1.0 - 1.9 40 9 55 1000 0.00

2.0 - 2.9 92 73 165 945 .94

3.0 - 3.9 128 64 37 229 780 1.10

4.0 - 4.9 119 28 9 156 550 .79

5.0 - 5.9 202 64 266 394 .74

6.0 - 6.9 101 101 128 .50

7.0 - 7.9 18 18 28 .50

8.0 - 8.9 9 9 .50

TOTAL 716 239 46 .83

CUM. TOTAL 1000 284 46

CDL. AVG. 4.50* 3.77 3.70 4.33

AVERAGE SIG. HEIGHT # .90 FT VARIANCE OF SIG. HEIGHT # .23 FT SQ

STANDARD DEVIATION OF MEIGHT # .48 FT STANDARD DEVIATION OF PERIOD # 2.19 SEC SQ*

STANDARD DEVIATION OF MEIGHT # .48 FT STANDARD DEVIATION OF PERIOD # 1.48 SEC*

HESULTS OBTAINED FROM 1024=SFCOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE MAYE GAGE LOCATED AT MUNICIPAL PIER.

CALMS ARE OMITTED.
```

:

110 088EF	VATION	5	3	UMMARY	FOR	IIG 69			
(SECS)				81G.	HEIGH	(FT)			
	0-1	1-2	2+3	3-4	101.	CUM. 101.	AVG.		
1.0 - 1.9	100	45			145	1000	.50		
3.0 - 3.9	114	45	18		173	791	1.23		
5.0 - 5.9	173	73	9		255	482	.86		
7.0 - 7.9	18	18	9		73	118	1.17		
TOTAL CUM. TOTAL	609	18 318 391	18 64 73	9	45	45	2.30		
COL. AVG.	4.35•		0.50	9.50	4.86				
AVERAGE SIG. H VARIANCE OF SI BTANDARD DEVIA	G. HEIC		.31	11 30 .56 F1	٧	ARTANC	E 05	E PERIOD = 4.87 SEC* WAVE PERIOD = 4.39 SEC VIATION OF PERIOD = 2.10	800 SEC.

THE TREATMENT OF THE PARTY OF THE

PERIOD (SECS)

SIG. MEIGHT (FT)

CUM. RG.

0-1 1-2 2-3 3-4 TOT.* TOT.* AVG.*

1000 0.00*

1.0 - 1.9 49 49 1000 .50

2.0 - 2.9 157 69 225 951 .80

3.0 - 3.9 147 98 20 10 275 725 1.11

4.0 - 4.9 98 39 20 157 451 1.00

5.0 - 5.9 167 10 176 294 .56

6.0 - 6.9 69 69 70 - 7.9 20

8.0 - 8.9 20 20 49 .50

8.0 - 8.9 20 20 49 .50

9.0 - 9.9 10 707AL 735 216 39 10

CUM. TOTAL 1000 265 49 10

COL. AVG. 4.34* 3.45 4.00 3.50 4.13

AVERAGE SIG. HEIGHT # .84 FT AVERAGE MAVE PERIOD # 4.14 SEC*
VARIANCE OF SIG. HEIGHT # .25 FT SQ VARIANCE OF MAVE PERIOD # 2.68 SEC SQ*
STANDARD DEVIATION OF MEIGHT # .48 FT STANDARD DEVIATION OF PERIOD # 1.64 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE WAVE GAGE LOCATED AT MUNICIPAL PIER.

CALMS ARE OMITTED.

270 OBS	FRVATION	3	8	UMMARY	FOR C	OCT 71	001 72	OCT 74
PERIOD				SIG.	HEIGH	17 (FT)		
(SECS)								
							CUM.	ROW
	0 - 1	1.5	2-3	3-4	4=5	TOT.	TOT	AVG.
0.09	15						1000	0.00
1.0 - 1.9	74	7				83	1000	.59
2.0 - 2.9	189	135	7			335	917	. 95
3.0 - 3.9	56	104	30	7	4	203		1.50
4.0 - 4.9	35	30	11	15	4	94		1.70
5.0 - 5.9	52	70	5.5	4		150		1.35
6.0 - 6.9	48	30	7			86		1.02
7.0 - 7.9	11	7				19		.90
8.0 - 8.9	15	11	4			30		1.13
OTAL	493	393	61	26	7			1.16
UM. TOTAL	1000	507	115	33	7			
OL. AVG.	3,630		4.59	4.36	4.00	3,88		

AVERAGE SIG. HEIGHT # 1.17 PT
VARIANCE OF SIG. HEIGHT # .51 FT SQ
STANDARD DEVIATION OF HEIGHT # .71 FT

AVERAGE WAVE PERIOD # 3.88 SEC*
VARIANCE OF WAVE PERIOD # 2.94 SEC SQ*
STANDARD DEVIATION OF PERIOD # 1.72 SEC*

AND ASSESSMENT OF THE PARTY OF

260 OBSFRVATIONS SUMMARY FOR NOV 71 NOV 72 NOV 74 PFRIDO SIG. HEIGHT (FT) (SECS) CUM. RCW TOT.* AVG.* 1000 0.00' 1000 0.00' 916 94 699 1.45 522 1.68 454 1.38 289 1.39 177 1.19 0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14. CUM, TOTAL COL, AVG, 2.3 5.6 TOT. . 1-2 3-4 4.5 50 64 237 177 68 165 112 52 88 24 85 92 15 85 50 19 31 15 46 31 50 36 23 48 27 12 15 12 8 15 8 4 177 1.19 124 1.23 36 1.83 12 1.50 8 0.00 8 1.50 4 0.00 454 415 1000 545 4.22* 5.07 104

1

AVERAGE SIG. HEIGHT # 1.22 FT
VARIANCE OF SIG. HEIGHT # .58 FT SG
STANDARD DEVIATION OF MEIGHT # .76 F AVERAGE WAVE PERIOD = 4.74 SEC*
VARIANCE OF WAVE PERIOD = 5.53 SEC SQ*
STANDARD DEVIATION OF PERIOD = 2.35 SEC* .76 FT

RESULTS OBTAINED FROM 1024=8FCOND DIGITAL RECORDS TAKEN WITH A STEP RES. AND CONT. WIRE WAYE GAGE LOCATED AT MUNICIPAL PIER.

* CALMS ARE OMITTED.

345 OBSERVATIONS SUMMARY FOR DEC 68 DEC 71 DEC 72 DEC 74 PERIOD SIG. HEIGHT (FT) (SECS) CUM. HUW TOT. AVG.* 1000 0.00 1000 .73 960 1.02 5.6 101.4 1.0 - 1.9 2.0 - 2.9 3.0 - 5.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 15.0 - 15.9 15.0 - 16.9 TOTAL CUM. TOTAL CUM. TOTAL 2.3 58 29 40 129 105 74 960 1.02 831 1.41 726 1.67 652 1.46 409 .89 218 .63 126 1.34 28 2.33 9 2.50 6 0.00 6 0.00 6 0.00 6 0.00 6 0.00 6 0.00 6 12 23 20 64 52 58 9 78 49 29 36 3 9 9 3 104 243 122 6 12 533 1000 5.55• 90 139 5.79 32 49 6.05 12 17 5.50 COL. AVG. AVERAGE SIG. HEIGHT # 1:19 FT
VARIANCE OF SIG. HEIGHT # ,75 FT SQ
8TANDARD DEVIATION OF HEIGHT # ,86 FT AVERAGE WAVE PERIOD . 5.54 SEC. VARIANCE OF WAVE PERIOD . 4.83 SEC 80° STANDARD DEVIATION OF PERIOD . 2.20 SEC.

.86 FT

TO THE RESIDENCE OF THE PARTY O

242

AVERAGE SIG. HEIGHT # 1.16 FT VARIANCE OF SIG. HEIGHT # .54 FT SQ STANDARD DEVIATION OF HEIGHT # .74 FT

1

508 373 1000 492 4.68* 4.62

20.0 -20.9 21.0 + TOTAL CUM, TOTAL COL. AVG.

AVERAGE WAVE PERIOD # 4.71 SEC*
VARIANCE OF WAVE PERIOD # 4.49 SEC SG*
STANDARD DEVIATION OF PERIOD # 2.12 SEC*

4.70

1 0.00

.50 0.00 1.15

RESULTS OBTAINED FROM 1024=SECOND DIGITAL RECORDS TAKEN WITH A STEP RES, AND CONT. WIRE WAVE GAGE LOCATED AT MUNICIPAL PIER.

* CALMS ARE OMITTED.

PERIOD				8:3.	-F!G	-T (FT)					
(SECS)											
										cu4.	80-
	0-1	! - 2	2-3	3	4-5	5.6	4-7	7 - 9	TUT.*	TLT.	4 v G . *
.09	291									1000	0.00
.0 - 1.9	1								1	1000	.50
.0 - 2.9	25	5							43	940	. 66
.0 - 3.9	223	93	9						459	957	. 4 4
.0 - 4.9	53	3 2	1 6	?	1				157	498	1.24
.0 - 5.9	50	5 =		4					127	341	1.13
.0 - e.9	41	25	6	?	1				106	514	1.11
.0 - 7.9	5.5	1.5	4	,	1				65	108	1.18
.0 . 8.0	10	7	5						28	47	1.24
.0 - 9.9	4	4	1						13	1.8	1.25
.0 -10.9	1	1							3	6	1.33
.0 -11.9	1	1							5	3	.93
.0 -12.9									1	1	1.50
TAL	722	217	4.8	1.	5	1					.85
M. TOTAL	1000	278	61	. >	3	1					
L. AVG.	4.49.	50	5.29	5.44	5.32	6.83	9.50	7.50	4.69		
ERAGE SIG	HEIGHT	z . A	1 = 7			VERAGE		PEDIO	• 0		
PIANCE OF S	IG. HET	3-7 :	32	F + C :	,	ARTANCE					S SEC S
NDARD DEVI	ATTON :	= -: 10	41 -	. 5		TANDA					

RESULTS OBTAINED FROM 7**INUTE PET 215 144 RECORDS TAKEN WITH A STEP MESISTANCE MAYE GAGE LOCATED AT MUNICIPAL PIER.

* CALMS ARE CMITTED.

Table A-42. Regression equations used to compensate significant height statistics for Naples, Florida.

Date	Compensation equations (ft)
1960 to Mar. 1964	$H_{NEW} = 0.23 + 0.76 H_{OLD}$
Apr. 1964 to 1974	No compensation

NOTE:

 ${
m H}_{\it NEW}$ = estimate of significant height that would have been obtained by the CERC method of pen and ink record analysis (based on reanalysis of 2 months of data from Atlantic City, New Jersey).

 $H_{\it OLD}$ = significant height obtained by old method of pen and ink record analysis.

Table A-43. CERC wave gage history for Crystal Pier, Destin, Florida.

CERC Form 174-74 IS Mar 74	7.5							
COORDINATES: 30°23' N., 86°25' W.	23' N., 86°25'	W.	LOCATION:	Crystal Pie	LOCATION: Crystal Pier, Destin, Florida	da		
Type of Gage	Beginning of Proper Operation	End of Proper Operation	Explanation	Gage Length (feet)	Gage Range (ft MSL)	Water Depth (ft MSL)	Distance from seaward end of pier	Pier Length (feet)
Continuous-wire staff 17 _ne 1971 21 June 1971	17 [ne 1971	21 June 1971	Gage struck by lightning.	20	-5 to +15	11	0	009
	20 Jay 1971	1 Aug. 1971	Gage struck by lightning.					
	11 Sept.1971	6 Feb. 1972	Gage struck by lightning.					
	7 Mar. 1972	18 July 1972	7 Mar. 1972 18 July 1972 Gage struck by lightning.					
	27 Jaly 1972	22 Aug. 1972	27 July 1972 22 Aug. 1972 Gage struck by lightning.					
	30 Aug. 1972	9 Sept. 1972	30 Aug. 1972 9 Sept. 1972 Gage struck by lightning.					
	20 Sept.1972	23 Oct. 1972	20 Sept.1972 23 Oct. 1972 Gage struck by lightning.					
	21 Nov. 1972	5 Dec. 1972	Signal cable loose.					
Continuous-wire staff 17 Jan. 1973 30 Mar. 1973	17 јап. 1973	30 Mar. 1973	Fuse blown.	20	-8 to +12	11	0	009
	18 Agr. 1973	31 July 1973	18 Agr. 1973 31 July 1973 Gage struck by lightning.					
	16 [25. 1974	7 Aug. 1974	16 2.2. 1974 7 Aug. 1974 Gage struck by lightning.					
			Gage discontinued.					

Table A-44. Number of analyzed digital records from Destin, Florida. $^{\mathrm{1}}$

YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1971							36		76	113	83	104	412
1972	99		87	109	112	115	66	68	58	72	35	18	839
1973	44	70	109	8	92	79	53						455
1974	56	100	87	25	96	64	64	18					510

 $^{^{\}mathrm{1}}\mathrm{From}$ 1,024-second records taken four times daily.



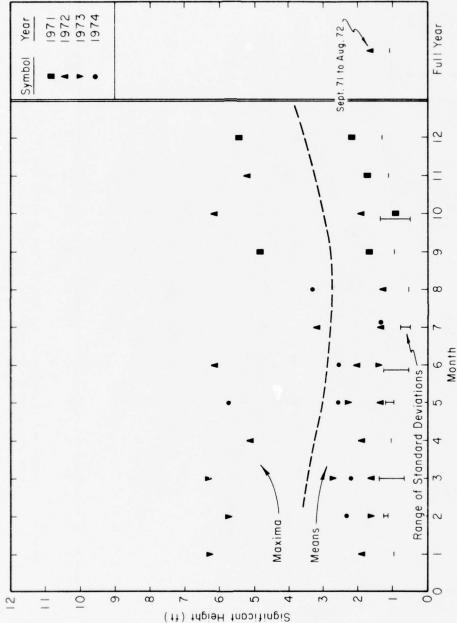


Figure A-69. Maxima, means, and standard deviations of significant height from Destin, Florida; computed from 1,024-second digital wave records taken four times daily.

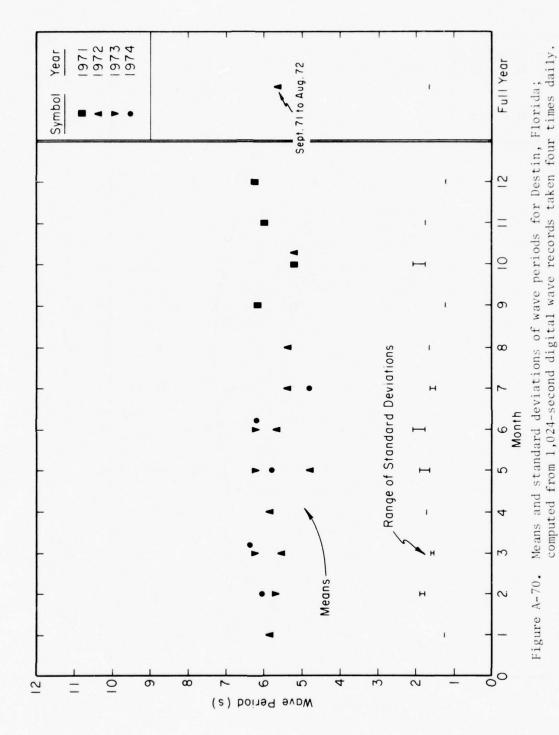


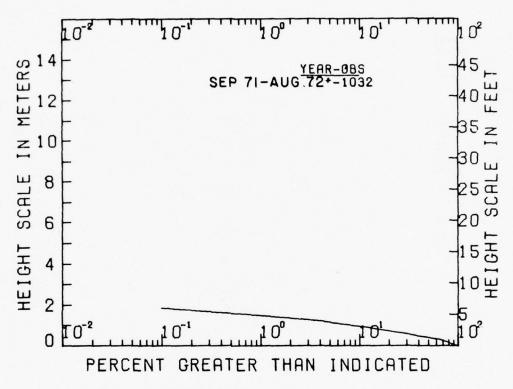

NOTE:

+ = computed from 1,024-second digital wave records taken four times daily.

Figure A-71. Annual cumulative significant height distribution from Destin, Florida.

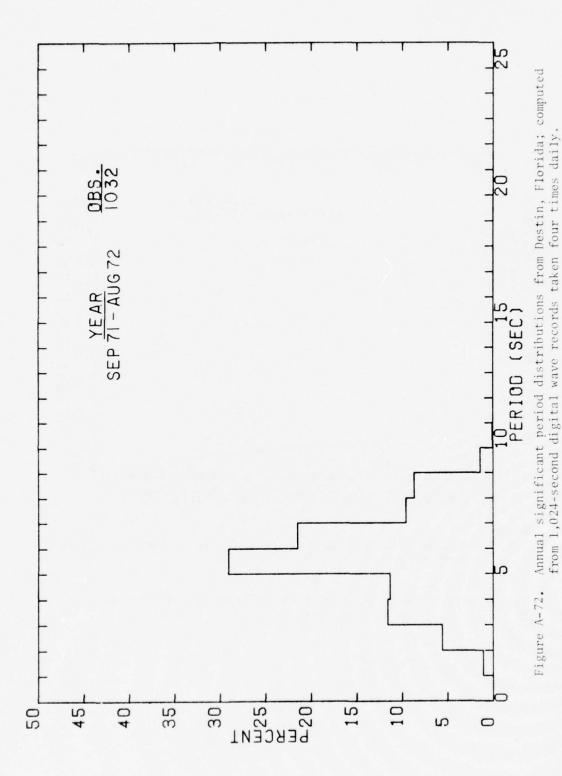

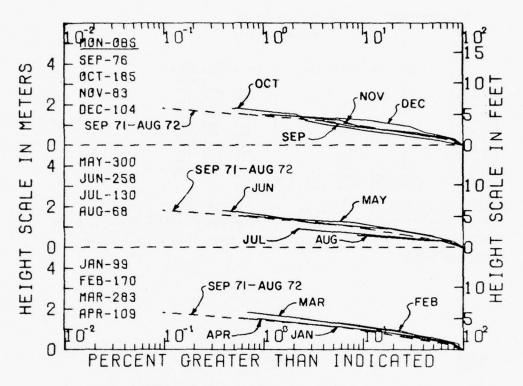


Figure A-73. Seasonal summaries of cumulative significant height distributions from Destin, Florida; computed from 1,024-second digital wave records taken four times daily.

Table A-45. Wave climate for Destin, Florida.

Distribution of significant height versus period (in observations per 1,000 observations).

99 088E	RVATIONS	3	81	JMM A R Y	FOR	JAN 72			
(SECS)				SIG.	HEIG	HT (FT)			
	0-1	1 = 2	2-3	3-4		101.=	CUM.		
0.09	0-1	1-6	2-3	304	4.	101.4		0.00	
1.0 - 1.9	10					10	1000		
2.0 - 2.9	10					10		•50	
3.0 - 3.9	10	30	10			51		1.50	
4.0 - 4.9		61	30			91		1.63	
5.0 - 5.9	51	91	162	30	10	343		2,09	
6.0 - 6.9	51	172	61	51	20	354		1.99	
7.0 - 7.9	10	40	10	20	10	91		2,28	
8.0 - 8.9	40		• •	20		40		.50	
9.0 - 9.9	10					10		.50	
TOTAL	192	394	273	101	40	• •		1.90	
CUM. TOTAL	1000	808	414	141	40				
COL. AVG.	6.240		5.61	6.40	50	5,93			
AVERAGE SIG.	1E I GHT :	1.0	6 FT			AVFRAGE	MAVE	PERIOD . 5.46 SFC*	
VARIANCE OF S				FT 50				AVE PERIOD . 1.63 880 80	
STANDARD DEVI				.99 F				ATION OF PERIOD = 1.28 SE	
RESULTS OBTAIN	NEO PROP	1024	-SECONO	DIGI	TAL R	CORDS 1	TAKEN	HITH A CONTINUOUS HIRE	
WAVE GAGE									
. CALMS ARE	MITTED.								

PENIOD (SECS)

SIG. HEIGHT (FT)

CUM. ROW

O=1 1=2 2=3 3=4 4=5 5=6 TOT.* TOT.* AVG.*

1000 0.00

1.0 = 1.9

2.0 = 2.9 29 6

3.0 = 3.9 47 76 12 135 965 1.24

4.0 = 4.9 82 59 6 147 829 1.98

5.0 = 5.9 35 47 88 53 29 253 682 2.48

6.0 = 6.9 35 53 6 53 6 6 159 429 2.24

7.0 = 7.9 18 24 6 18 12 76 271 2.27

8.0 = 8.9 59 24 6 55 18 18 15 159 194 2.39

9.0 = 9.9 18 6 6 6

TOTAL 241 318 182 171 65 24

CUM. TOTAL 1000 759 441 259 88 24

COL. AVG. 6.06* 5.31 5.37 6.74 6.77 8.00 5.01

AVERAGE SIG. HEIGHT = 2.05 FT AVERAGE HAVE PERIOD = 5.01 BEC*
VARIANCE OF SIG. HEIGHT = 1.53 FT SG VARIANCE OF HAVE PERIOD = 3.33 SEC SO*
STANDARD DEVIATION OF HEIGHT = 1.84 FT STANDARD DEVIATION OF PERIOD = 1.82 SEC*

283 OBSERVATIONS SUMMARY FOR MAR 72 MAR 73 MAR 74 PERIOD (BECS) SIG. HEIGHT (FT) CUM. ROW 1000 0.00 4 1000 0.50 28 996 1.38 71 96H 1.60 120 898 1.97 279 777 2.30 269 498 2.18 4 92 230 2.38 4 110 138 2.66 21 28 3.83 7 1.00 7 2.22 203 4.5 0.0 = .9 1.0 = 1.9 2.0 = 2.9 3.0 = 3.9 4.0 = 4.9 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 8.0 = 8.9 9.0 = 9.9 10.0 = 10.9 TOTAL CUM. TOTAL COL. AVG. 3-4 0-1 1-2 7 42 81 102 21 35 11 67 18 14 25 7 25 35 7 7 4 102 1000 6.05* 11 18 7 11 11 290 502 6.17

AVERAGE SIG. HEIGHT = 2,21 FT AVERAGE HAVE PERIOD = 6,10 SEC*
VARIANCE OF SIG. HEIGHT = 1,24 FT SG VARIANCE OF HAVE PERIOD = 2,58 SEC SO*
STANDARD DEVIATION OF HEIGHT = 1,11 FT STANDARD DEVIATION OF PERIOD = 1,61 SEC*

RESULTS OBTAINED FROM 1024=BECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE HAVE GAGE LOCATED AT CRYSTAL PIER.

* CALMS ARE OMITTED.

109 088EF	VATION		3	UMMARY	FOR A	PR 72					
PERIOD				SIG.	HEIGH	(FT)					
(SECS)											
								CUM.	ROW		
	0-1	1-2	2.3	3-4	4.5	5-6	TOT. *		AVG.		
0.09		-						1000	0.00		
1.0 - 1.9								1000	0.00		
2.0 . 2.9	37	18					55	1000	.83		
3.0 - 3.9	46	83					128	945	1.14		
4.0 - 4.9	9	37	18	9			73	817	1.88		
5.0 - 5.9	10	174	73	18			284	743	1.52		
6.0 - 6.9	37	73	64	55			229	459	2.10		
7.0 - 7.9	9	28	18	18	9	9	92	229	2.70		
8.0 - 8.9	37	37	9	18	18		119		2.04		
9.0 - 9.9		18					18		1.50		
TOTAL	193	468	183	119	28	9			1.85		
CUM. TOTAL	1000	807	339	156	37	9					
COL. AVG.	5.26*	5.62	6.10	6,65	8.17	7.50	5.85				
AVERAGE SIG. H	FIGHT .	1.6	4 77		A1	PRAGE	WAVE	PERIOD	. 5.86	SECT	
VARIANCE OF SI				FT 80						2.94 SEC	30.
STANDARD DEVIA										0 . 1.72	

SUMMARY FOR MAY 72 MAY 73 MAY 74 300 ORSERVATIONS PERIOD (SECS) SIG. HEIGHT (FT) TOT. * TOT. * AVG. *
1000 0.00
14 1000 .50
81 986 1.00
139 905 1.38
135 767 1.43
260 632 2.31
152 372 2.59
98 220 2.41
101 122 2.40
14 20 2.75
3 7 4.50
3 0.00
3 3 4.50 0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 TOTAL CUM. TOTAL COL. AVG. 2 . 3 3-4 1.5 13 13 43 47 50 40 7 23 30 3 33 60 43 73 37 7 3 30 40 70 57 33 23 47 37 20 17 23 13 13 17 3 3

270 1000 4.84*

AVERAGE SIG. HEIGHT = 2.00 FT VARIANCE OF SIG. HEIGHT = 1.44 FT SQ STANCARD DEVIATION OF HEIGHT = 1.20 FT AVERAGE WAVE PERIOD # 5.56 SEC* VARIANCE OF WAVE PERIOD # 3.57 SEC 89* STANDARD DEVIATION OF PERIOD # 1.89 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE HAVE GAGE LOCATED AT CRYSTAL PIER.

CALMS ARE OMITTED.

258 0886	NOITAN	3	3	UMMARY	FOR .	JUN 72	JUN 73	JUN 7	4		
PERIOD				SIG.	HEIGH	HT (FT)					
(SECS)											
									cum.	90w	
	0-1	1-5	2 - 3	3-4	4-5	506	6-7	101	TOT.		
0.09	4							•	1000	0.00	
1.0 - 1.9		4						4		1.50	
2.0 . 2.9	31	16	4					51		.96	
3.0 - 3.9	27	66	15					105		1.35	
4.0 . 4.9	8	39	35					82		1.63	
5.0 . 5.9	50	136	109	58	4			358		2.02	
6.0 - 6.9	53	19	35	50	8			136		2.50	
7.0 - 7.9	19	8	12	27				66		2.21	
8.0 - 8.9	43	47	19	19	4			132		1.1.	
9.0 . 9.9	4	23	19		4	4	4	58		2.57	
0.0 -10.9				4		4				4.50	
OTAL	209	357	244	159	19		4		U	1.96	
UM. TOTAL	1000	791	434	190	31	12	u				
OL. AVG.	5.75*		6,01	6.65			9.50	5.98			
VERAGE SIG.	EIGHT	1.9	5 FT			AVERAGE	WAVE	PERIOD	. 5.		
ARIANCE OF SI	G. HEI	GHT .	1.07	FT 30						3.63 of C	800
TANDARD DEVI	TION OF	HEIG	HT .	1.04 FT						100 . 1.91	

130 OBSERVATIONS SUMMARY FOR JUL 72 JUL 74

PERIOD (SECS)

0-1 1-2 2-5 3-4 TOT,* TOT,* AVG,*

0-0 - .9 5 1000 0.00

1.0 - 1.9 5 1000 0.00

2.0 - 2.9 23 38 62 1000 1.13

3.0 - 3.9 54 115 15 186 938 1.29

4.0 - 4.9 31 169 36 8 248 752 1.59

5.0 - 5.9 77 169 46 295 504 1.39

6.0 - 6.9 31 31 6 70 209 1.28

7.0 - 7.9 23 31 5 70 209 1.28

7.0 - 7.9 23 31 5 70 209 1.28

7.0 - 7.9 23 31 5 5 140 1.07

8.0 - 8.9 36 23 8 8 78 85 1.30

9.0 - 9.9 8 8 5 5 5 77 108 23 1.36

CUM, TOTAL 1000 708 131 25

CUM, TOTAL 1000 708 131 25

CUL, AVG, 5.55* 4.89 5.07 6.50 5.14

AVERAGE SIG. HEIGHT = 1.33 FT AVERAGE WAVE PERIOD = 5.13 SEC*
VARIANCE OF SIG. HEIGHT = .38 FT SG VARIANCE OF WAVE PERIOD = 2.48 SEC SQ*
STANDARD DEVIATION OF MEIGHT = .61 FT STANDARD DEVIATION OF PERIOD = 1.57 SEC*

RESULTS OBTAINED FROM 1024-BECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT CRYSTAL PIER.

CALMS ARE OMITTED.

68 088EF	VATION:	S	8	UMMARY	FOR A	UG 72							
PERTOD (SECS)				81G.	HEIGH	T (FT)							
	0-1	1 - 2	5+3	101.	CUM.	AVG.							
0.09	15			15		0.00							
2.0 . 2.9	1,5	44		44		1.50							
3.0 - 3.9	59	132		191		1.19							
4.0 - 4.9	44	59	15	118		1.25							
5.0 - 5.9	103	191	44	338	632	33							
6.0 - 6.9	74	50	29	132	294	1.17							
7.0 - 7.9	15	44		59	162	1.25							
8.0 - 8.9	74	50		103	103	.79							
TOTAL	382	529	88			1.21							
CUM, TOTAL	1000	618	88										
COL. AVG.	5.77*	5.03	5.67	5.37									
AVERAGE SIG. H	EIGHT !	1.2	4 77			VERAGE							
VARIANCE OF SI						ARTANCE	OF WAY	E PER	100		2.65	SEC	30.
STANDARD DEVIA	TION OF	HEIG	HT .	.50 F	7 5	TANDARD	DEVIA	TION C	F PER	100		1 . 63	SEC.

THE RESERVE THE PROPERTY OF THE PARTY OF THE

76 CBSERVATIONS SUMMARY FOR SEP 71

PERIOD (SECS)

O=1 1=2 2=3 3=4 4=5 TOT.* TOT.* AVG.4

1000 0.00

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

1.0 = 1.9

AVERAGE SIG. HEIGHT = 1.63 FT AVERAGE HAVE PERIOD = 6.17 SEC*
VARIANCE OF SIG. HEIGHT = .85 FT SQ VARIANCE OF HAVE PERIOD = 1.62 SEC SQ*
STANDARD DEVIATION OF HEIGHT = .92 FT STANDARD DEVIATION OF PERIOD = 1.27 SEC*

RESULTS OBTAINED FROM 1024=BECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT CRYSTAL PIER.

* CALMS ARE OMITTED.

PER	IOD				SIG.	HEIGH	IT (FT)				
(3 6	CS)										
										CUM.	ROM
		0-1	1.2	5.3	3-4	4-5	5.6	6-7	TOT. *	TOT.	AVG.
.0 -	. 9	70								1000	0.00
1.0 .	1.9	27							29	1000	.50
2.0 .		86	16						110	971	.66
	3.9	81	65	11					169	860	1.05
	4.9	27	70	27	5				140	692	1.98
5.0 .	5.9	43	81	43	27	5	11		227	552	2.04
.0 -	6.9	70	11	16			11	5	116		1.45
7.0 .	7.9	49	11						64		.68
	8.9	65	54	5					134		1.02
	9.9	. 11							15		.50
TAL		530	308	103	32	5	16	5	•		1.25
JM. T	DTAL	1000	470	162	59	27	22	5			
DL. A	VG.	5,17*	5,32	5.34	5,33	5,50	5.83	6.50	5.27		

AVERAGE SIG. HEIGHT # 1.26 FT AVERAGE WAVE PERIOD # 5.23 SEC*
VARIANCE OF SIG. HEIGHT # 1.03 FT SQ VARIANCE OF WAVE PERIOD # 3.78 SEC SQ*
STANDARD DEVIATION OF HEIGHT # 1.02 FT STANDARD DEVIATION OF PERIOD # 1.95 SEC*

65 UBSERVATIONS BUMMARY FOR NOV 71 PERIOD SIG. HEIGHT (FT) (SECS) CUM. ROW TOT. AYG. * 1000 0.00 1000 0.00 1000 83 963 1.36 863 1.75 763 1.42 450 1.50 313 3.00 188 1.96 25 2.00 1.69 0.0 - 1.9 2.0 - 2.9 3.0 - 5.9 4.0 - 4.9 5.0 - 6.9 7.0 - 7.9 6.0 - 6.9 9.0 - 9.9 TOTAL CUM. TOTAL COL. AVG. 0-1 5-6 707.4 1-5 2.3 3.4 24 12 24 60 12 48 84 157 36 84 12 24 72 24 72 253 470 1000 747 5.50• 5.91 38 100 100 313 136 125 163 25 36 60 12 24 36 12 181 277 6,30 15 36 96 7.83 12 48 7.50

AVERAGE SIG, HEIGHT = 1,68 FT

VARIANCE OF SIG, HEIGHT = 1,03 FT SQ

STANDARD DEVIATION OF HEIGHT = 1,01 FT

AVERAGE WAVE PERIOD = 6,03 SEC*

VARIANCE OF WAVE PERIOD = 2,98 SEC SQP

STANDARD DEVIATION OF PERIOD = 1,73 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAYE GAGE LOCATED AT CRYSTAL PIER.

* CALMS ARE OMITTED.

104 OBSER	VATION	5	8	UMMARY	FOR	DEC 71					
PERIOD				SIG.	HEIG	HT (FT)					
(8EC8)											
								CUM.	ROW		
	0 = 1	1-2	5.3	3-4	4-5	5+6	TOT. *		AVG. *		
0.09			-						0.00		
1.0 = 1.9									0.00		
2.0 - 2.9									0.00		
3.0 . 3.9	10	58					67		1.36		
4.0 . 4.9		67	10				77		1.63		
5.0 - 5.9	48	115	38	38	10		250		1.88		
6.0 . 6.9	38	106	58	77	38		317		2.41		
7.0 . 7.9	29	38	38	67	50	10	515		2.77		
8.0 . 8.9	38				38		77		2.50		
TOTAL	163	385	144	183	115	10			2.23		
UM. TOTAL	1000	837	452	308	125	10					
OL. AVG.	6,68*		6.37	6,66	7,33	7.50	6.26				
VERAGE SIG. H	EIGHT	. 2.1	7 FT			VFRAGE	HAVE	PERIOD	. 6,25	afr.	
ARIANCE OF SI	G. HEI	GHT .	1.55	FT 80	1	ARIANCI	OF W	AVE PE	R100 .	1.53 810	80*
TANDARD DEVIA	TION O	F HEIG	HT .	1.25 71		TANDAR	DOFVI	ATTON		0 . 1.24	

SUMMARY FOR 21 MONTHS SEP 71 THROUGH JUL 74 1865 DRSERVATIONS SIG. HEIGHT (FT) PERIOD (SECS) CUM. ROW TOT.* AVG.* 1000 0.00 1000 .57 992 .943 943 1.30 827 1.69 705 2.01 422 2.13 228 2.27 137 1.97 25 2.30 3 3.10 1 0.00 1 4.50 1 86 6-7 707.* 1-2 0.0 - .9 1.0 - 1.9 2.0 - 2.9 3.0 - 3.9 4.0 - 4.9 5.0 - 5.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 TOTAL CUM, TOTAL COL, AYG. 0-1 12 7 28 36 19 47 36 20 36 8 49 116 123 283 194 91 112 22 3 1 19 66 64 107 61 24 30 1 12 34 76 49 17 17 1 38 31 19 14 1 10 11 8 11 2 248 379 210 109 1000 752 374 164 5,52* 5,42 5,92 6,56 AVERAGE HAVE PERIOD = 5.79 SEC*
VARIANCE OF WAVE PERIOD = 3.07 SEC SQ*
STANDARD DEVIATION OF PERIOD = 1.75 SECA AVERAGE 81G, HEIGHT # 1,85 FT VARIANCE OF SIG. HEIGHT # 1,23 FT 50 STANDARD DEVIATION OF HEIGHT # 1,11 FT RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS MIRE MAYE GAGE LOCATED AT CRYSTAL PIER.

CALMS ARE DMITTED.


Table A-46. CERC wave gage history for Pleasure Pier, Galveston, Texas.

		40									
		Pier Length (feet)	1,100								
		Distance from seaward end of pier	0 (gage facing southeast)								
Ads,	Fexas	Water Depth (ft MSL)	17								
, Garveston, 1	LOCATION: Pleasure Pier, Galveston, Texas	Gage Range (ft MSL)	-8 to +17								
reasure vin	Pleasure P	Gage Length (feet)	25								
To the same safe marchy for treasure ties, daily section, 10 Adds	LOCATION:	Explanation	24 Mar. 1965 29 Apr. 1965 Electricity off.			Sell operating.					
	z.	End of Proper Operation	29 Apr. 1965	5 Apr. 1967	2 Nov. 1971						
	14 17' N., 94°47' V	Beginning of Proper Operation	24 Mar. 1965	23 July 1965 5 Apr. 1967	9 June 1967	25 July 1972					
The second secon	CERC Form 174-74 18 Mar 74 CGORDINATES: 29°17' N., 94°47' W.	Type of Gage	Step-resistance staff-relay type								


Table A-47. Number of analyzed pen and ink records from Galveston, Texas. $^{\rm l}$

YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1965			25	99			44	166	170	150	150	75	879
1966	167	168	175	140	186	161	133	153	152	175	132	130	1872
1967	137	126	150	21		128	101						663

 $^{^{1}\}mathrm{From}$ 7-minute records taken six times daily and analyzed by the CERC method.

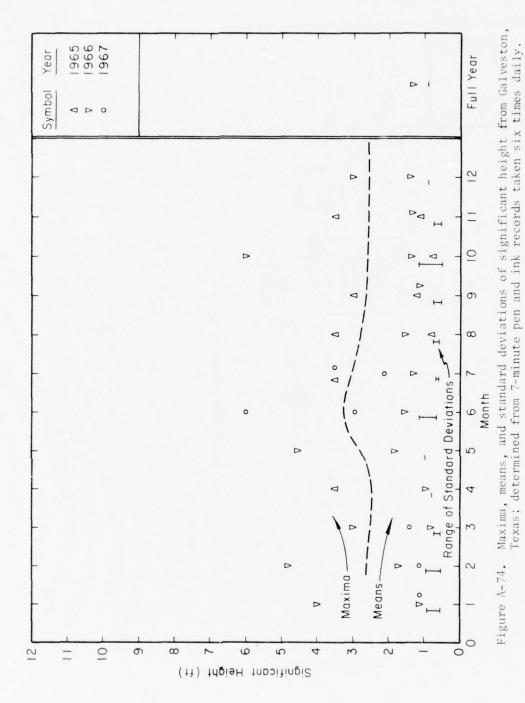

*

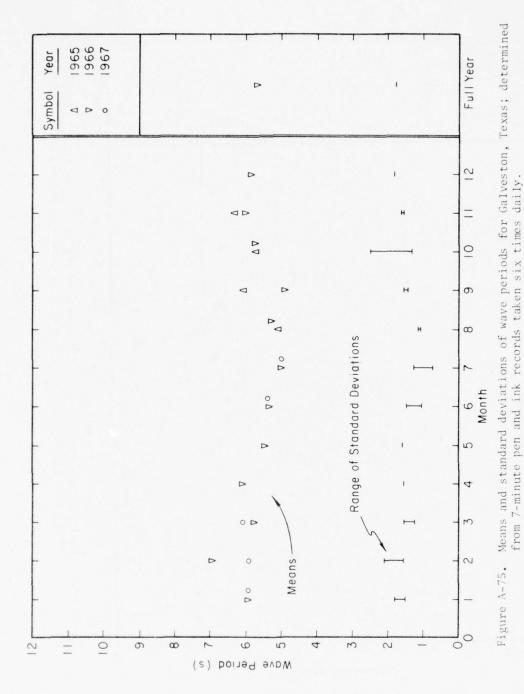



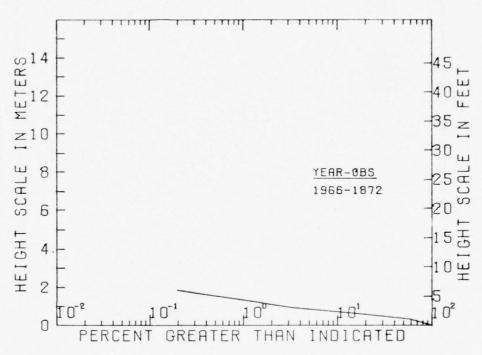


Figure A-76. Annual cumulative significant height distributions from Galveston, Texas; determined from 7-minute pen and ink records taken six times daily.

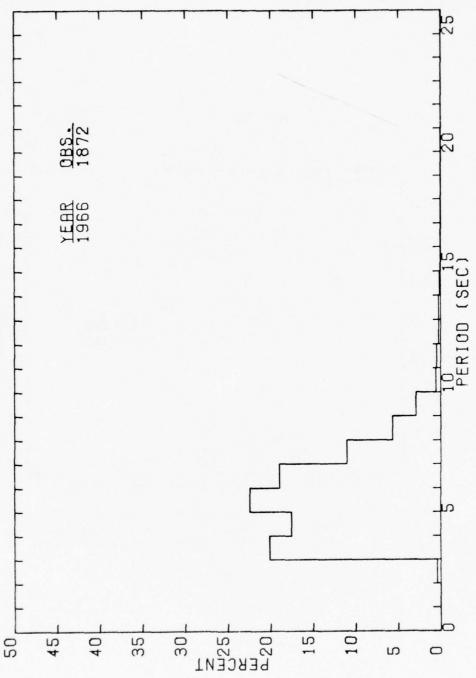

Annual significant period distributions from Galveston, Texas; determined from 7-minute pen and ink records taken six times daily. Figure A-77.

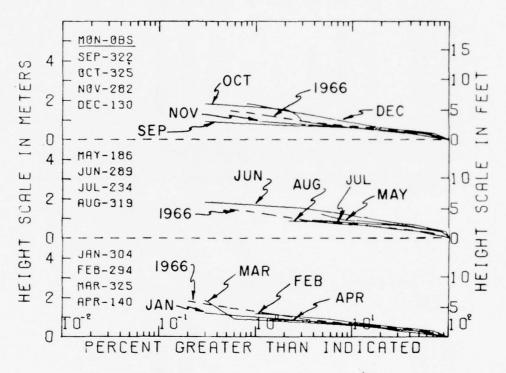

7,

Figure A-78. Seasonal summaries of cumulative significant height distributions from Galveston, Texas; determined from 7-minute pen and ink records taken six times daily.

Table A-48. Wave climate for Galveston, Texas.

Distribution of significant height versus period
(in observations per 1,000 observations).

304 DBSE	RVATIONS	•	,	UMMARY	FOR J	AN 66 .	IAN 67	
PERIOD (SECS)				HEIG	HT (FT)		
							CUM.	ROM
	0=1	1.2	2 . 3	3-4	4-5	TOT.*	TOT	AVG. +
.0 - 1.9	178						1000	.00
2.0 . 2.4	3	3				8	1000	1.00
2.5 . 2.9							992	.00
3.0 - 3.4	46	5.2				84	992	. 83
3,5 . 3,9	46	10				68	908	.68
4.0 . 4.9	66	26	•			120	840	.90
5.0 . 5.9	69	109	5.3			244	720	1.27
6.0 . 6.9	59	86	20	3		204	476	1,30
7.0 . 7.9	30	72	20	3		152	272	1.47
8.0 . 8.9	30	26	13	3 7		92	120	1.46
9.0 . 9.9	3	10	• • •	3	3	24		
10.0 -10.9			3		•	- 4	4	
TOTAL	530	365	86	16			•	1.10
	1000	470	105	50	3			
CUM. TOTAL								
COL. AVG.	5,390	6.16	6.77	8,10	9,50	5,95		

AVERAGE SIG. HEIGHT # 1.10 FT AVERAGE HAVE PERIOD # 5.95 SEC*
VARIANCE OF SIG. HEIGHT # .55 FT SG VARIANCE OF HAVE PERIOD # 2.76 SEC SG*
STANDARD DEVIATION OF HEIGHT # .74 FT STANDARD DEVIATION OF PERIOD # 1.66 SEC*

RESULTS OBTAINED FROM T=MINUTE PEN AND INK RECORDS TAKEN HITH A STEP RESISTANCE RELAY MAYE GAGE LOCATED AT PLEASURE PIER

CALMS ARE OMITTED.

294 OBSERVATIONS	SUMMARY FOR F	EB 66 FEB 67	
PERIOD	HEIGHT (FT)	
(SECS)			
		CUM.	ROW
0=1 1=2	2.3 3.4 4.5	TOT. * TOT. *	
.0 - 1.9 27		1000	.00
2.0 - 2.4 7		7 1000	.50
2.5 . 2.9		993	.00
3.0 - 3.4 44 20		66 993	.62
3.5 - 3.9 34 34			1.00
4.0 - 4.9 37 65			1.13
5.0 - 5.9 27 99	7 3		1.40
6.0 - 6.9 34 112	37 3		
7.0 - 7.9 34 109	27 3		1.55
8.0 - 8.9 37 75			1.50
	14 17 3 17 10 7		1.64
	• • • • • • • • • • • • • • • • • • • •		2.44
	7 10	51 58	2,63
11.0 -11.9		7 7	2,50
TOTAL 282 544	116 48 10		1.46
CUM. TOTAL 1000 718	173 58 10		
COL. AVG. 5.48 6.44	7.88 8.71 9.17	6.50	
AVERAGE SIG. HEIGHT # 1.46		VERAGE WAVE P	ERIOD . 6.50 SEC.
VARIANCE OF SIG. HEIGHT .	.68 PT 50 V	ARTANCE OF WA	VE PERIOD . 3.77 SEC 800
STANDARD DEVIATION OF HEIGH			TION OF PERIOD . 1.94 SEC.

person management and a second of the second of the second

324 ORSERVATIONS SUMMARY FOR MAR 67

PERIOD (SECS)

0-1 1-2 2-3 3-4 for.* 107.* 246.*

0-1 1-2 2-3 3-4 for.* 107.* 246.*

1000 .00

2.0 - 2.4

2.5 - 2.9

3.0 - 3.4 43 3 555 1000 .57

3.5 - 3.9 31 12 51 945 .79

4.0 - 4.9 49 62 3 136 693 1.09

5.0 - 5.9 102 130 12 290 757 1.13

6.0 - 6.9 46 114 34 3 235 467 1.47

7.0 - 7.9 40 65 25 158 232 136

8.0 - 8.9 40 9 3 62 74 .79

9.0 - 9.9 5 3 11 11 11 .83

TOTAL 519 401 77 3

CUM. TOTAL 1000 441 80 3

COL. AVG. 5.70* 6.20 6.66 6.50 5.93

AVERAGE SIG. HEIGHT # 1.06 FT AVERAGE WAVE PERIOD # 5.93 SEC# VARIANCE OF SIG. HEIGHT # .05 FY VARIANCE OF NAVE PERIOD # 1.99 SEC SG# STANDARD DEVIATION OF HEIGHT # .65 FY STANDARD DEVIATION OF PERIOD # 1.41 SEC#

RESULTS OBTAINED FROM 7-FINUTE PEN AND THE RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT PLEASURE PIER & CALMS ARE OMITTED.

140 085	RVATION	•		UMMARY	FOR AP	R 66		
PERIOD (BECS)				HE 1 0	HT (FT)			
	0-1	1.5	2+3	3-4	101.0	CUM. TOT. •	ROW AVG. •	
.0 - 1.9 2.0 - 2.4 2.5 - 2.9	200					1000	.00	
3.0 • 3.4	29 57		1.6		71	1000	.50	
4.0 - 4.9 5.0 - 5.9 6.0 - 6.9	114	14	21		161 196 277		1.11	
7.0 - 7.9	14	50 21 36	43	14	170 27 62	89	1.50	
TOTAL CUM. TOTAL COL. AVG.	1000	157 300 7.68	143	14	6,08		. 96	
AVERAGE BIG.	HEIGHT !	,	6 FT	FT 40	4		HAVE PE	RIOD = 6.0

AVERAGE BIG. HEIGHT # .96 FT AVERAGE WAVE PERIOD # 6.08 SECTION OF SIG. HEIGHT # .59 FT SG VARIANCE OF HAVE PERIOD # 2.42 SEC SQUENTATION OF HEIGHT # .77 FT STANDARD DEVIATION OF PERIOD # 1.56 SECTION OF PERIOD # 1.56 SEC

```
SUMMARY FOR MAY 66
                186 DESERVATIONS
          PERIOD
(SECS)
                                                                                                                    HEIGHT (PT)
                                                                                                                                     CUM. ROW

4-5 TOT. TOT. AVG. 

1000 .00

5 1000 .50

109 995 .90

126 885 1.02

148 760 1.80

268 612 1.97

219 344 2.02

11 60 126 1.86

22 33 66 3.83

11 27 33 3.30

5 5 5 4.50

48
2.0 = 2.4

2.5 = 2.9

3.0 = 3.4

3.5 = 3.9

3.0 = 4.9

5.0 = 5.9

7.0 = 7.9

8.0 = 8.9

9.0 = 9.9

10.0 = 11.9

TOTAL

CUM. TOTAL

CUM. TOTAL
                                                       0 • i
16
5
                                                                                            2=3
                                                                           1 -2
                                                                                                                   3-4
                                                          59
                                                                            43
65
81
129
108
22
                                                                                               54
113
86
                                                                                                                       11
16
5
                                                                                                   16
                                                    194 452
1000 506
4.21* 5.23
                                                                                           269
355
5,86
                                                                                                                                                               5,45
```

AVERAGE BIG. HEIGHT # 1.80 FT AVERAGE HAVE PERIOD # 5.45 SEC*
VARIANCE OF SIG. HEIGHT # .96 FT BQ
STANDARD DEVIATION OF HEIGHT # .98 FT
STANDARD DEVIATION OF PERIOD # 1.59 BEC*

RESULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT PLEASURE PIER CALMS ARE OMITTED.

	289	BSERVATI	0 18	8	UMMARY	FOR .	JUN 66	JUN 6	7		
	RIOD ECS)				HEIG	HT (F	т)				
2.0	• 1.9		1 1=2	5+3	3=4	445	5=6	6-7	101.	TOT. • 1000 1000	**************************************
3.5	3.9	1 1 2	4 76	24	24	3			115 253	837	00 1.43 1.59 1.99
7.0		1	3 45	111	17	511	14	3	271 208 94	312 104 10	2.45
9.0 10.0 11.0 TOTAL	11.5		7 443	301	83	30	24		3	3	1.50 .00 1.50 2.17
COL.	TOTAL	4.7	913	5.41	170	5.84	6,36	6.50	5,38		
VAFMV	GE 31	G. HEIGH	. 2.1	7 . 7		1	VERAGE	MAVE	PERIOD	. 5.3	9 \$1C*

AVERAGE SIG. HEIGHT # 2.17 FT AVERAGE WAVE PERIOD # 3.38 SECTION OF SIG. HEIGHT # 1.27 FT SG VARIANCE OF HAVE PERIOD # 1.00 SEC SQ0 STANDARD DEVIATION OF PERIOD # 1.29 SECC

MEDICAL PROPERTY OF THE PROPER

AVERAGE SIG. HEIGHT # 1,67 FT AVERAGE HAVE PERIOD # 5,01 8EC*

VARIANCE OF SIG. HEIGHT # .54 FT SO VARIANCE OF HAVE PERIOD # 1,19 SEC 8G*

STANDARD DEVIATION OF MEIGHT # .74 FT STANDARD DEVIATION OF PERIOD # 1,09 SEC*

RESULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT PLEASURE PIER CALMS ARE OMITTED.

310 -33E8	VATION	•		UMMARY	FOR AL	G 65 A	UG 66		
PERIOD (SECS)				HEIGH	T (FT)				
.0 • 1.9	0 • 1 3 6	1-5	5+3	3+4	101.	TOT. • 1000 1000	AVG. *		
2.5 · 2.9 3.0 · 3.4 3.5 · 3.9	44	25			72	1000	.00 .86		
4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9	152	122	26 36 19	9	332 208 39	248	1.09		
CUM. TOTAL	1000	339 470 5,10	132	22 22 6,79	5,18		1,12		
AVERAGE SIG. M VARIANCE OF SI STANDARD DEVIA	G. HEI	GHT .	. 59	FT 80 .77 FT	VA	RIANCE	OF W	PERIOD = 5.16 SEC# AVE PERIOD = 1.24 SEC ATION OF PERIOD = 1.11	

ACCORDING TO A STREET OF THE S

322 DASERVATIONS SUMMARY FOR SEP 65 SEP 66 HEIGHT (FT) (BECS) CUM. RON 1000 .00 1000 .50 997 .00 997 .73 868 1.73 669 1.20 366 1.30 46 1.05 10 .50 7 1.50 3 .00 3 1.50 1.15 2.0 - 1.9 2.0 - 2.9 3.0 - 3.4 3.5 - 2.9 4.0 - 4.9 5.0 - 5.9 7.0 - 7.9 8.0 - 8.9 9.0 - 9.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL CUM. TOTAL 101. 1=2 1.5 56 93 25 81 87 50 28 128 79 181 240 174 148 36 28 50 90 121 19 1 . 3 3 469 599 5,72 3 441 1000 5.04*

AVERAGE SIG. HEIGHT # 1.15 FT VARIANCE OF SIG. HEIGHT # .42 FT SG STANDARD DEVIATION OF HEIGHT # .65 FT AVERAGE WAVE PERIOD # 5.53 SEC*
VARIANCE OF WAVE PERIOD # 2.67 SEC SQ*
STANDARD DEVIATION OF PERIOD # 1.63 SEC®

RESULTS DETAINED FROM THINTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY HAVE GAGE LOCATED AT PLEASURE PIER CALMS ARE OMITTED.

SUMMARY FOR OCT 65 OCT 66 325 OBSERVATIONS PERIOD (SECS) HEIGHT (FT) 4-5 1.0 1-2

CONTRACTOR OF THE LOCK OF THE TAX OF THE

CUM. POR 1000 AVG.: 1000 .00 1000 .00 1000 .55 917 .79 834 .97 601 1.15 328 1.29 138 1.10 99 1.25 67 1.17 55 3.00 47 3.50 47 3.50 20 5.17 8 4.50 1.07 2.0 = 2.4 2.5 = 2.9 3.0 = 3.4 3.5 = 3.4 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 8.0 = 8.9 11.0 = 11.0 12.0 = 12.0 13.0 = 13.0 14.0 = 14.9 TOTAL CUM. TOTAL COL. AVG. TOT. 18 86 114 43 22 83 83 233 273 170 59 32 12 8 46 95 86 58 22 12 31 6 3 609 295 1000 391 5.11• 5.48

AVERAGE WAVE PERIOD = \$.79 SEC*
VARIANCE OF WAVE PERIOD = 4.52 SEC SQ*
STANDARD DEVIATION OF PERIOD = 2.13 SEC* AVERAGE SIG. MEIGHT # 1.07 FT VARIANCE OF SIG. MEIGHT # .95 FT 80 STANDARD DEVIATION OF MEIGHT # .96 FT .96 FT

SUMMARY FOR NOV 65 NOV 66 282 DESERVATIONS HEIGHT (FT) PERIOD (SECS) TOT, * TOT, * AVG. *
1000 .00
1000 .00
1000 .56
48 956 .61
141 907 .97
289 767 1-10
185 478 1-54
159 293 1-36
74 133 1-60
52 59 1-43
7 7 2-00
1-20 5 . 2 2.0 = 2.0 2.5 = 2.9 3.0 = 3.4 3.5 = 3.9 4.0 - 4.9 5.0 = 5.9 6.0 = 6.9 7.0 = 7.9 9.0 = 9.9 10.0 = 10.9 TOTAL CUM. TOTAL CUM. TOTAL CUM. TOTAL 43 32 71 135 21 43 14 14 64 117 131 89 43 25 21 21 7 408 496 1000 592 5.44* 6.48 85 1.20 6.15

AVERAGE SIG. HEIGHT # 1,20 FT AVERAGE HAVE PERIOD # 6,15 SEC*
VARIANCE OF SIG. HEIGHT # ,44 FT SQ VARIANCE OF WAVE PERIOD # 2,60 SEC SQ*
STANDARD DEVIATION OF HEIGHT # ,67 FT STANDARD DEVIATION OF PERIOD # 1,61 SEC*

RESULTS DBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE RELAY WAVE GAGE LOCATED AT PLEASURE PIER

CALMS ARE OMITTED,

129 0a5E	RVATIONS	5	51	JY MARY	FOR DE	5 66
PERIOD				►E I G H	(FT)	
(SECS)						
					CUM,	ROM
	0-1	1 - 5	5-3	101.0	TOT.	AVG
.0 - 1.9	65				1000	.00
2.0 - 2.4					1000	.00
2.5 - 2.9					1000	.00
3.0 - 3.4	101	50		165	1000	. 85
3.5 - 3.9	8	62		74	835	1.39
4.0 - 4.9	16	101	8	132	760	1.44
5.0 - 5.9	8	78	16	107	628	1.58
6.0 - 6.9	39	132	31	215	521	1.46
7.0 - 7.9	31	39	85	165	306	1.85
8.0 - 8.9	39	23	39	107	140	1.50
9.0 . 9.0	8	23		33	33	1.25
TOTAL	310	512	178			1.37
CUM. TOTAL	1000	690	178			
COL AVG	5.47*	5.58	7.24	5 A7		

THE RESERVE THE PROPERTY OF THE PARTY OF THE

AVERAGE SIG. MEIGMT # 1.37 FT AVERAGE MAVE PERIOD # 5.87 SECON VARIANCE OF SIG. MEIGMT # .47 FT SO VARIANCE OF MAVE PERIOD # 3.43 SEC SQUESTANDARD DEVIATION OF MEIGHT # .69 FT STANDARD DEVIATION OF PERIOD # 1.65 SECON VARIANCE OF MAVE PERIOD # 1.65 SECON VARIANCE OF MAV

RESULTS ORTAINED FRUM 7-"INUTE PE" AND THE RECORDS TAKE" FITH & STEP RESISTANCE RELAY WAVE CAGE LOCATED AT PLEASURE PIED.

5000 LTY FUP 21 MONTHS AUG 65 TEROUGH JUL 67 3148 DASERVATIONS PERIOD (SECS) -EIGHT (FT) CUM. #0a 101. AVG... 1000 .00 1000 .67 998 .00 998 .65 917 1.05 834 1.28 653 1.43 393 1.57 83 1.49 32 1.87 10 2.50 6 2.67 3 5.00 2 5.19 1 3.50 1.33 2.0 - 2.4 2.5 - 2.4 3.5 - 3.4 3.5 - 3.4 3.5 - 3.4 3.5 - 3.4 3.5 - 3.4 3.5 - 3.4 3.5 - 3.4 3.5 - 3.4 3.6 - 3.4 3.7 - 3.4 3.7 - 3.4 3.8 - 3.4 1-2 2-3 3-4 4-5 5-0 TOT . . 49 37 64 75 43 25 17 24 35 77 112 86 53 19 10 81 53 181 250 195 115 51 22 55 3 405 419 1000 595 5.24* 5.75 23 38 6.92 139 AVERAGE SIG. MEIGHT # 1.33 FT VARIANCE OF SIG. MEIGHT # .76 FT SQ STANDARD DEVIATION OF MEIGHT # .87 FT EVERAGE NAVE PEHIOD # 5.71 SEC*
VARIANCE OF NAVE PERIOD # 2.70 SEC 80*
STANDARD CEVIATION OF PERIOD # 1.64 SEC* RESULTS DRYAINED FROM 7-MINUTE PEN AND THE GEORGS TAKEN WITH A STEP GESISTANCE RELAY WAVE GAGE LOCATED AT PLEASURE PIER * CALMS ARE OMITTED.

APPENDIX A-3

SIGNIFICANT WAVE HEIGHT AND PERIOD SUMMARIES, U.S. PACIFIC COAST



7,

Figure A-79. Location of BEB-CERC wave gages along the U.S. Pacific coast.


Table A.49. CERC wave gage listory for Phillips Petroleum Company Oil Platform Harry, Pt. Conception, California.

		Pier Length (feet)	
	Harry,	Distance from seaward end of pier	Platform is 1.5 miles offshore (gage is on southwest corner)
	y Oil Platform	Water Depth f (ft MSL) e	100 (gg) se co
	LOCATION: Phillips Petroleum Company Oil Platform Harry, Pt. Conception, California	Gage Range (ft MSL)	12 to +18
	Phillips Petro Pt. Concepti	Gage Length (feet)	30
	LOCATION:	Explanation	22 Mar. 1966 [21] an. 1967 [22] Mar. 1968 [21] May 1968 [12] Aug. 1968 [20] Oct. 1968 [20] CERC.
	W.	End of Proper Operation	21 Jan. 1967 13 Mar. 1968 12 Aug. 1968 20 Oct. 1968
7.4	25' N., 120°24'	Beginning of Proper Operation	28 Apr. 1966 21 Jan. 1967 22 Mar. 1967 13 Mar. 1968 21 May 1968 12 Aug. 1968 18 Sept. 1968 20 Oct. 1968
18 Yar 74	COORDINATES: 34°23' N., 120°24' W.	Type of Gage	Step-resistance staff

Table A-50. Number of analyzed pen and ink records from Pt. Conception, California. $^{\rm 1}$

MB YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC	тот
1966					83	139	151	169	116	138	162	160	1118

 $^{^{1}\}mathrm{From}$ 7-minute records taken six times daily and analyzed by the CERC method.

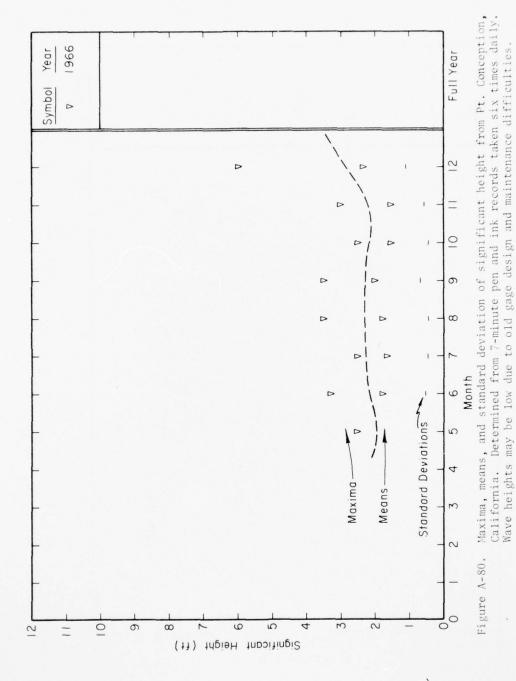

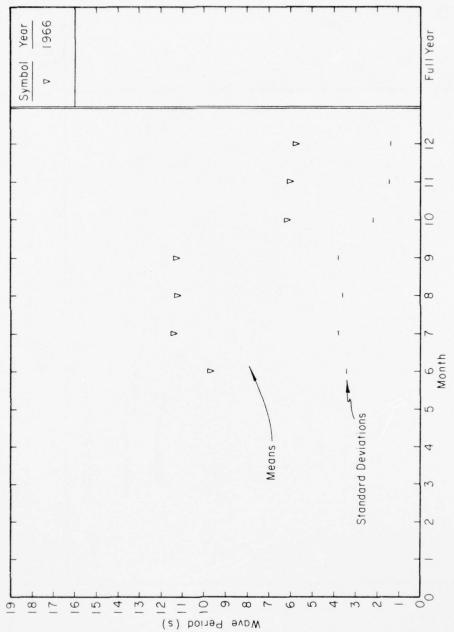


Figure A-81. Means and standard deviations of wave period from Pt. Conception, California; determined from 7-minute pen and ink records taken six times daily.

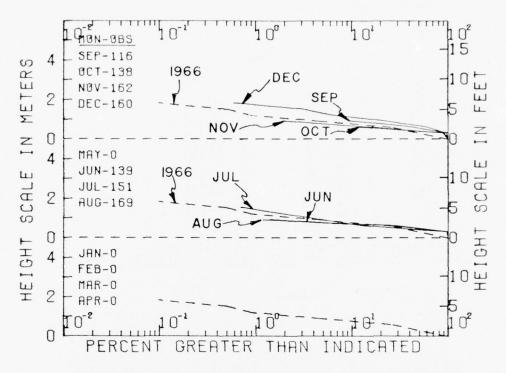


Figure A-S2. Seasonal summaries of cumulative height distributions from Pt. Conception, California. Determined from 7-minute pen and ink records taken six times daily. Wave heights may be low due to old gage design and maintenance difficulties.

Table A-51. Wave climate for Pt. Conception, California. Distribution of significant height versus period (in observations per 1,000 observations).

139 0858	RVATIONS		SUMMARY F	OR JUN	66	
(SECS)			HEIGHT	(FT)		
.0 • 1.9 2.0 • 2.4 2.5 • 2.9 3.0 • 3.4 3.5 • 3.9	0-1	1-2 2-	3 - 4	101.4	1000 1000 1000	.00 .00 .00
3.5 + 3.9 4.0 + 4.9 5.0 + 5.9 6.0 - 6.9 7.0 + 7.9 8.0 - 8.9	7	29 1 79 72 2 108 4 94 3	7 2 3 7	43 94 94 158 137	957 863 770	.00 1.83 1.50 1.73 1.86
9.0 = 9.9 10.0 = 10.9 11.0 = 11.9 12.0 = 12.9 13.0 = 13.9	7	65 2 43 14 29 1	9 7 9 4	58 14 29	475 381 324 309 281	1.61 1.50 1.50 2.50 1.63
14.0 -14.9 15.0 -15.9 16.0 -16.9 TOTAL CUM. TOTAL COL. AVG.	36 1000 11,90* 9	676 27 964 28	7 3 14 8 14	223	237	1.69 .00 2.00 1.77
				AVE VAR STA	PAGE IANCE NDARD	NAVE PERIOD = 9.74 SEC* OF MANYE PERIOD = 11.48 SEC SQ* DEVIATION OF PERIOD = 3.39 SEC*
150 Dase PERIOD (SECS)	RVITIONS		SUPPARY HEIGH		. 65	
PERIOD (SECS)		1-5 5-	HEIGH	CUM, TOT.*	RD* AVG. •	
PERIOD (SECS) 2.0 ~ 1.9 2.0 ~ 2.4 2.5 ~ 2.9 3.0 ~ 3.4 3.5 ~ 3.9 4.0 ~ 4.9 5.0 ~ 5.9 6.0 ~ 6.9		7 40 47 73	77 40 53 87 87	CUM, TOT.* 1000 1000 1000 1000 993 953	ROW AVG.4 ,00 .00 1.50 1.50 1.37	
PERIOD (SEC5) 2.0 ~ 1.9 2.0 ~ 2.9 3.0 ~ 3.4 3.5 ~ 3.9 4.0 ~ 5.9 6.0 ~ 6.9 7.0 ~ 7.9 8.0 ~ 8.9 9.0 ~ 9.9 10.0 ~ 10.9	0-1	7 40 47 73 93 60 20 7	3 107.* 7 40 53 87 7 1000 60 20 7 20	CUM, TOT.* 1000 1000 1000 1000 1000 1000 1000 10	ROW AVG.4 ,000 .000 1.50 .000 1.37 1.57 1.50 1.50	
PERIOD (SEC5) 2.0 ~ 1.9 2.0 ~ 2.9 3.1 ~ 3.4 3.5 ~ 3.9 5.0 ~ 5.9 6.0 ~ 6.9 7.9 8.0 ~ 8.9 9.0 ~ 9.0 10.0 ~ 11.9 12.0 ~ 12.9 13.0 ~ 13.9 14.0 ~ 12.9 15.0 ~ 15.9 15.0 ~ 15.9	7	7 40 47 73 1 93 60 20 7 20 67 107 320 6	3 107.* 7 46 53 3 87 7 100 60 20 67 107 7 20 380 7 7 107 7 380 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	CUM, TOT., 1000 1000 1000 1000 1000 993 953 903 953 535 540 433	RDW AVG.4 ,00 .00 1.50 1.50 1.57 1.57 1.50	
PERIOD (SEC5) 20 ~ 1.9 2.0 ~ 2.4 2.5 ~ 2.9 3.0 ~ 3.4 3.5 ~ 3.4 4.0 ~ 4.9 5.0 ~ 7.9 8.0 ~ 8.9 7.0 ~ 7.9 8.0 ~ 11.9 12.0 ~ 11.9 12.0 ~ 12.9 13.0 ~ 13.9 14.0 ~ 14.9 15.0 ~ 15.9	7 1000 5.50*11	7 40 47 73 1 93 60 20 67 107 320 67 113 320 68 473 12 993 12 13 873 12	3 107.* 7 40 53 3 87 7 1000 60 20 7 7 20 67 107 7 7 107 7 7 7 7 7 7 7 7 7 7 7 7 7	CUM, 1000 1000 1000 1000 1000 1000 1000 993 900 813 653 653 657 540 433	ROW	*AVE PERIOD = 11,46 SEC* OF LIVE PERIOD = 13,91 SFC SC= DEVICTION OF PERIOD = 3,73 SEC*

RESILTS OBTAINED FROM 7-MINUTE PEN AND THE PECCEDS TAKEN WITH A STEP RESISTANCE WAVE RASE LOCATED AT PHILLIPS PLATFORM HARRY,

* CALTS ARE CHITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

```
SUMMARY FOR AUG 66
                       169 OBSERVATIONS
                PERIOD
                                                                                                                                                                                           HEIGHT (FT)
                 (SECS)
                                                                                        0+1 1-2 2+3 3+4 TOT.* TOT.* AVG.*
                                                                                                                                                                                                                                                                                              .00
2.0 - 2.4

2.5 - 2.9

3.0 - 3.4

3.5 - 3.9

4.0 - 4.9

5.0 - 5.9

6.0 - 6.9

7.0 - 7.9

8.0 - 8.9

9.0 - 9.9

11.0 - 11.9

12.0 - 12.9

13.0 - 13.9

14.0 - 14.9

15.0 - 15.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9

10.0 - 16.9
                                                                                                                                                                                                                                                                 1000 .03
1000 .00
1000 .00
1000 1.50
994 1.61
840 1.50
775 1.50
728 1.50
621 1.73
438 1.93
438 1.93
59 .00
59 2.50
                                                                                                                              47
                                                                                                                                                                                                                                             5 5
4 7
5 3
                                                                                                                                                                  6
                                                                                                                                                                                                                                             65
                                                                                                                         59
47
107
59
41
36
47
                                                                                                                                                                                                                                        107
77
53
53
                                                                                                                                                                18
                                                                                                                                                               12
18
36
95
                                                                                                                                                                                                                                             83
                                                                                                                         105
                                                                                                                                                                                                                                       296
                                                                                   12 36 12
757 231 12
1000 1000 243 12
.00*10.50 13.40 16.50
                                                                                                                                                                                               12
                                                                                                                                                                                                                                             59
 AVERAGE SIG. HEIGHT # 1.75 FT
VARIANCE OF SIG. HEIGHT # .21 FT SQ
STANDARD DEVIATION OF HEIGHT # .46 FT
                                                                                                                                                                                                                                          AVERAGE WAVE PERIOD # 11.20 SEC*
VARIANCE OF WAVE PERIOD # 12.43 SEC 50*
STANDARD DEVIATION OF PERIOD # 3.53 SEC*
                                                                                                                                                                                  . 46 FT
                         116 OBSERVATIONS
                                                                                                                                                                          SUMMARY FOR SEP 66
                PERIOD
                                                                                                                                                                                            HEIGHT (FT)
                   (SECS)
                                                                                                                                                                                                                                                               CUM. ROM
TOT.* AVG.*
1000 .00
1000 .00
1000 1.50
974 1.50
957 1.50
957 1.58
802 1.93
741 2.07
681 2.12
612 1.90
569 1.83
                                                                                                                                                                                                                            * )T. *
                                                                                        0-1 1-2 2-3 3-4
  0 - 1.9

2.0 - 2.4

3.5 - 3.4

3.5 - 3.4

3.5 - 3.4

5.0 - 5.9

6.0 - 6.9

7.0 - 7.9

8.0 - 7.9

9.0 - 9.9

11.0 - 11.9

12.0 - 12.9

13.0 - 13.9

14.0 - 14.9

15.0 - 16.9

TOTAL

CUM. TOTAL

CUM. TOTAL

CUM. TOTAL
                                                                                                                                                                                                                                          26
17
52
103
60
                                                                                                                                 95
                                                                                                                                                                 26
34
43
17
                                                                                                                                                                                                                                               60
                                                                                                                                56
                                                                                                                                26
                                                                                                                                                                                                                                               43
                                                                                                                                                                                                                                                                         543 2.50
517 1.95
422 1.97
78 3.17
52 3.17
                                                                                                                                                                  26
                                                                                                                                                                                                                                               26
                                                                                                                                60
                                                                                                                                                                                                  34
17
34
                                                                                                                                                                  95
                                                                                                                                                                                                                                           345
                                                                                                                                                                                                                                              26
                                                                                    595
1000 1000
                                                                                                                                                         310
                                                                                                                                                                                                 95
                                                                                     .00*10.44 11.92 15.32
                                                                                                                                                                                                                               11.36
    AVERAGE SIG. HEIGHT # 2.00 FT
VARIANCE OF SIG. HEIGHT # .44 FT SO
STANDARD DEVIATION OF HEIGHT # .66 FT
                                                                                                                                                                                                                                     AVERAGE WAVE PERIOD # 11.36 SEC*
VARIANCE OF WAVE PERIOD # 13.67 SEC 89*
STANDARD DEVIATION OF PERIOD # 3.72 SEC*
   RESULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT PHILLIPS PLATFORM HARRY, # CALMS ARE OMITTED,
```

Wave heights may be low due to old gage design and maintenance difficulties.

A.C.

37%

138 085	ERVATIONS	3	91	UMMARY	FOR no	1 66		
PERIOD (SECS)				HEIGH	T (FT)			
					CUM.	ROM		
	0=1	1=2	2 . 3	TOT.*		AVG		
.0 - 1.9				1011		.00		
2.0 - 2.4						.00		
2.5 - 2.9						.00		
3.0 - 3.4	7	94	29	130		1.67		
3.5 - 3.9		51	1	58		1.62		
4.0 - 4.9		65	14	80		1.68		
5.0 - 5.9	29	101	29	159		1.50		
6.0 - 6.9	59		14	355		1.46		
7.0 - 7.9	14	123	14	152		1.50		
8.0 - 8.9		14		14		1.50		
9.0 - 9.9		7		7	51			
10.0 -10.9						.00		
11.0 -11.9					43			
12.0 -12.9		7		7		1.50		
13.0 -13.9		5.5		55		1.50		
14.0 =14.9		14		14		1.50		
TOTAL	8.0	812	109			1.53		
CUM. TOTAL	1000	920	109					
COL. AVG.	6.02*	6.26	5.05	6,11				
AVERAGE SIG.	HEIGHT	. 1.5	3 FT		AV	FRAGE	HAVE	PFRI

AVERAGE SIG. HEIGHT # 1.53 FT AVERAGE HAVE PERIOD # 6.11 SEC*
VARIANCE OF SIG. HEIGHT # .19 FT SQ VARIANCE OF HAVE PERIOD # 4.67 SEC 80*
STANDARD DEVIATION OF HEIGHT # .43 FT STANDARD DEVIATION OF PERIOD # 2.16 SEC*

162 0835	RVATION	S	9	UMMARY	FOR NO	V 66	
PERIOD (SECS)				HEIG	HT (FT)		
	0=1	5 = 2	2=3	3-4	101.*	CUM	HO.
.0 - 1.9						1000	
2.0 - 2.4						1000	
2.5 - 2.9						1000	
3.0 = 3.4		3.7	19		56	1000	1.83
3.5 - 3.9		49	19		58	944	1.77
4.0 - 4.9	6	68	12		86	877	1.57
5.0 - 5.9	12	173	43	19	247	790	1.77
6.0 - 6.9	43	247	12		302	543	1.40
7.0 - 7.9	56	117	19		191	241	1.31
8.0 - 8.9	6	43			49		1.37
TOTAL	123	735	123	19			1.54
CUM. TOTAL	1000	877	142	19			
COL. AVG.	6.85*	6.01	5.20	5.50	6.00		

AVERAGE SIG. MEIGHT # 1.54 FT AVERAGE WAVE PERIOD # 6.00 SEC*

VARIANCE OF SIG. MEIGHT # .32 PT SQ VARIANCE OF MAVE PERIOD # 1.83 SEC SQ*

STANDARD DEVIATION OF MEIGHT # .57 FT STANDARD DEVIATION OF PERIOD # 1.35 SEC#

RESULTS OBTAINED FROM TOMINITE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT PHILLIPS PLATFORM HARRY.

* CALMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

AVERAGE SIG. HEIGHT # 2.37 FT AVERAGE WAYE PERIOD # 5.61 SEC+
VARIANCE OF SIG. HEIGHT # 1.13 FT SQ VARIANCE OF MAYE PERIOD # 1.77 SEC SQ+
STANDARD DEVIATION OF HEIGHT # 1.06 FT STANDARD DEVIATION OF PERIOD # 1.33 SEC+

RESULTS OBTAINED FROM T-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT PHILLIPS PLATFORM HARRY.

CALMS ARE OHITTED.

Wave heights may be low due to old gage design and maintenance difficulties.


Table A-52. CERC wave gage history for Port Hueneme, California (Gage No. 715).

W 1,0011 W 1	54 10 M; 117 14 M.	Beginning End of Proper of Proper Length Range Depth From seaward Length Operation Operation Explanation (feet)	9 Nov. 1961 25 Apr. 1962 Underwater cable from gage to 25 —10 to +15 23 Gage mounted on steel pile off north end of breakwater at Ventura County Harbor.	29 June 1962 31 Jan. 1963 Cable broken.	16 Aug. 1963 30 June 1964 Gage taken over by Los Angeles District.	21 June 1965 9 Dec. 1965 Gage fouled.	11 Jan. 1967 25 Dec. 1967	13 Mar. 1968 17 Aug. 1968 Gage discontinued.	
74 - 74 - 10' N 110°14' W	10 IN: 119 14 W.		9 Nov. 1961 25 Ap	29 June 1962 31 Jar	16 Aug. 1963 30 Jun	21 June 1965 9 De	11 Jan. 1967 25 De	13 Mar. 1968 17 Au	
CERC Form 174-74 18 Mar 74	COURDINALES. 34	Type of Gage	Step-resistance, staff-parallel type						

Table 53. Number of analyzed pen and ink records from Port Hueneme, California. $^{\rm 1}$

YR MB	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1961											128	186	314
1962	185	167	186	150		8	175	185	180	186	180	124	1726
1963	171							92	161	186	180	186	976
1964	186	168	184	173	161	178							1050
1965						41	165	149	179	115	101	54	1430

 $^{^1\}mathrm{From}$ 7-minute records taken six times daily; analyzed by the second BEB method for 1961 to March 1964 and analyzed by the CERC method for April 1964 to 1965.

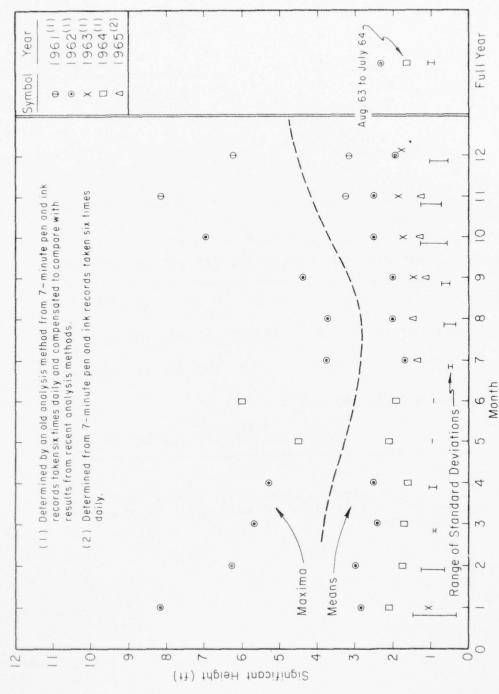

Maxima, means, and standard deviation of significant height from Port Hueneme, California. Wave heights may be low due to old gage design and maintenance difficulties. Figure A-83.

The state of the s



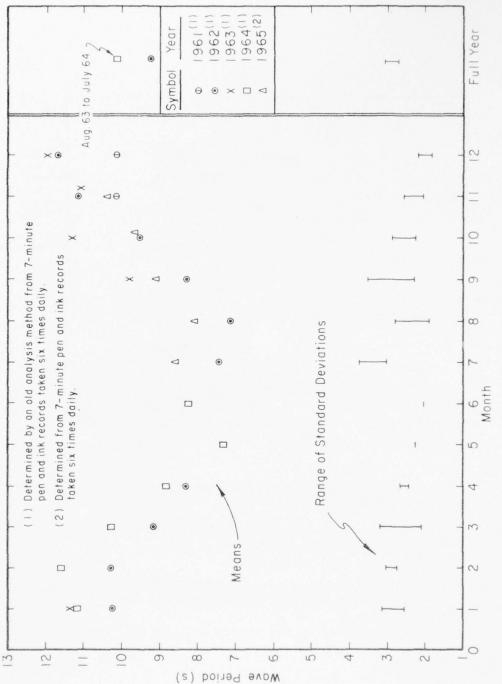



Figure A-84. Means and standard deviations of wave periods for Port Hueneme, California.

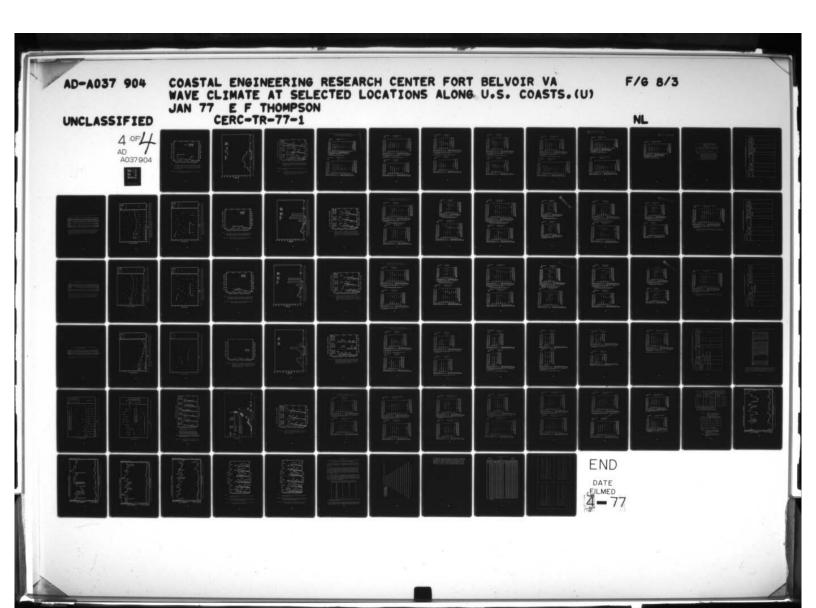

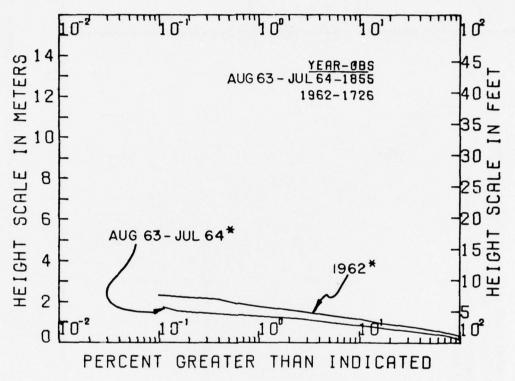


f = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Table A-55); wave heights may be low due to old gage design and maintenance difficulties.

Figure A-85. Annual cumulative significant height distributions from Port Hueneme, California.

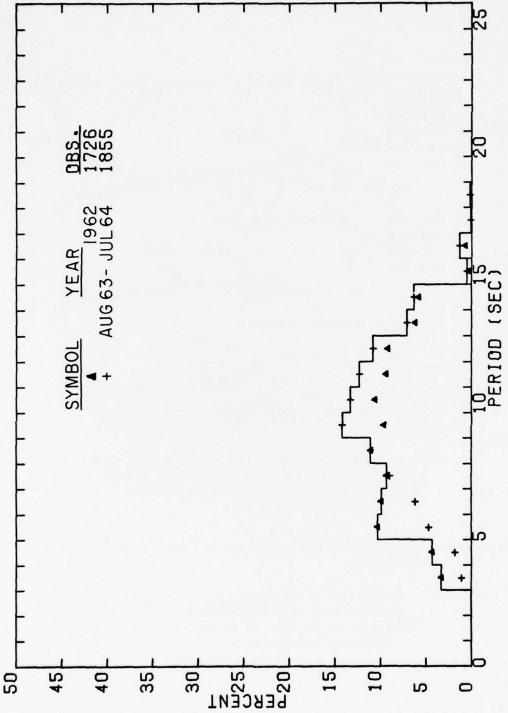


Annual significant period distributions from Port Hueneme, California; determined by an old analysis method from 7-minute pen and ink records taken six times daily. Figure A-86.

THE RESERVE OF THE PARTY OF THE

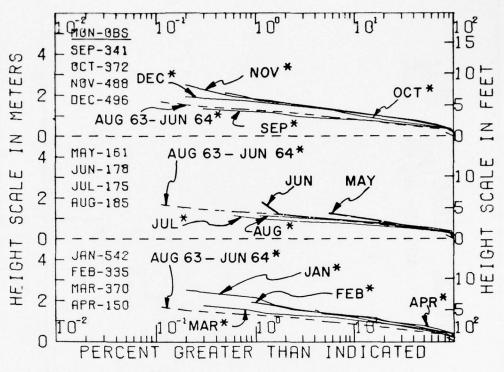

- = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Table A-55).
- Unmarked = determined from 7-minute pen and ink records taken six times daily.
- Figure A-87. Seasomal summaries of cumulative significant height distributions from Port Hueneme, California. Wave heights may be low due to old gage design and maintenance difficulties.

Table A-54. Wave climate for Port Hueneme, California. Distribution of significant height versus period (in observations per 1,000 observations).

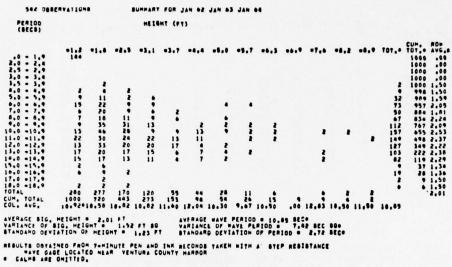

Nove heights may be low due to old gage design and maintenance difficulties.

335 OBSE		•	٠		, 0, ,	E# 95							
(SECS)				HEI	HT (F1	")							
.0 - 1.9	-1.2	•1.8	•2.5	•3.1	-3.7	-4.4	-5.0	-5.7	-6.3	-6.9	101.0	CUM. TUT. •	AVG.
.0 - 2.4												1000	.00
0 - 5.4	3	3									3	1000	1.1
.0 - 4.9	3	3	6	6							18		5.0
.0 - 5.9	9	24	9	18	3	6					71		2.1
0 - 6.9	3	24	12	6		3					49		1.9
0 - 7.9		15	6	12	12	6					34 52		5.0
0 - 9.9	9	30	21	15		•	3				77		1.9
0 -10.9	3	36	36	36	12	15	3		3		148		2.5
0 -11.9	6	42	24	21	18	12	3				129		2.4
0 -12.9	9	51	18	3	12	27	3	3	3	6	138		2.7
0 -13.9	6	54	9	18	6	9	15	3		3	126		2.5
0 -14.9	6	36	21	21	6	12	9	3			117		2.5
0 -15.9		6	3	3	3						15	31	5.5
0 -16.9		12									12		1.5
0 -17.9		3									3	3	1.5
TAL	87	355	175	164	72	90	36	9	6	9			1.3
. TOTAL	1000	913	558	385	551	149	60	54	15	•			
. AVG.	9.80*	11.04	10.48	10.30	11.33	11.47	15.45	13,50	11.50	15.63	10.91		

STANDARD DEVIATION OF HEIGHT # 1.16 FT STANDARD DEVIATION OF PERIOD # 2.96 SEC# AVERAGE SIG. HEIGHT # 2.04 FT VARIANCE OF SIG. HEIGHT # .91 FT SG STANDARD DEVIATION OF HEIGHT # .95 FT AVERAGE WAVE PERIOD # 9.69 SEC*
VARIANCE OF WAVE PERIOD # 7.78 SEC 80*
STANDARD DEVIATION OF PERIOD # 2.79 SEC*

14

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED NEAR VENTURA COUNTY HARBOR.

Wave heights may be low due to old gage design and maintenance difficulties.

286 808 9.58

150 08SE	RVATION	5	5	UMMARY	FOR .	PR 62						
PERIOD (SECS)				HEIG	HT (F	")						
	-1.2		•2.5	-3,1	-1 4	.4.4	-5.0	+5.7	•••	CUM.	ROM	
.0 - 1.9	****	-1.0		-3.1	•3.7	,.	-3.0	-3.1	101.4	TOT.*		
2.0 - 2.4										1000		
2.5 - 2.9										1000		
3.0 - 3.4	20	7								1000		
3.5 - 3.9	7	50							27		1.02	
4.0 - 4.9		67	13								1.34	
5.0 - 5.9		40	50						80 73		1.61	
6.0 - 6.9		40	13	13	13	11		,	93		1.91	
7.0 - 7.9		40	47	13	1,3	13	7	,	127		2.60	
8.0 - A.9		33	13	73	13	40	,	13	107			
9.0 - 9.9		33	53	80	7	50		13	180		3.01	
0.0 -10.9		7	13	27	13				100		2.90	
1.0 -11.9		13	13	50					47			
2.0 -12.9		13	.,	50	7				40		2.23	
3.0 -13.9		,	,	7					13		2.46	
4.0 -14.9			7	13	27				47		3.05	
OTAL	27	280	207	273	87	80	7	40	• '	47	2.51	
UM. TOTAL	1000	975	693	487	213	127	47	40			5.21	
OL. AVG.	3.37*		8.66		10.65	8.33	7.50	8.33	0.35			
									.,,,,			
VERAGE SIG.	HEIGHT	. 2.5	1 FT			VFRAGE	WAVE	PERIOD		3 8EC	•	
ARIANCE OF 8	IG. HEI	GHT .		FT 30				AVE PE		7.2	8 238 B	
TANDARD DEVI				1.01 5		TANDAR						

255 410 7,62

50 1000 5.97*

1

AVERAGE SIG. HEIGHT = 2.08 AT VARIANCE OF SIG. HEIGHT = .90 FT SO STANDARD DEVIATION OF HEIGHT = .95 FT AVFRAGE WAVE PERIOD = 7.33 SEC= VARIANCE OF WAVE PERIOD = 5.01 SEC 5Q= STANDARD DEVIATION OF PERIOD = 2.24 SEC=

7,33

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP REBISTANCE WAVE GAGE LOCATED NEAR VENTURA COUNTY HARBOR CALMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

178 DASERVATIONS SUMMARY FOR JUN 64 PERIOD (SECS) HEIGHT (FT) TOT. * AVG. * TOT . . 1-2 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 4.0 - 4.9 5.0 - 5.9 4.0 - 6.9 7.0 - 7.9 6.0 - 6.9 7.0 - 7.9 10.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 TOTAL CUM. TOTAL CUM. TOTAL 2.3 1000 .00
1000 .00
1000 .00
1000 1.00
1000 1.00
949 1.25
944 1.64
626 1.57
742 1.97
573 1.61
174 2.36
96 2.14
34 1.70
6 .00
6 1.50 17 6 22 101 79 11 45 118 84 169 197 202 79 62 28 17 6 45 62 34 22 6 6 22 11 22 6 17 17 101 607 933 7.96 6 67 1000 7.44 73 90 35 AVERAGE SIG. HEIGHT # 1.89 FT VARIANCE OF SIG. HEIGHT # .78 FT SQ STANDARD DEVIATION OF HEIGHT # .88 F AVERAGE WAVE PERIOD # 8.27 SEC+ VARIANCE OF WAVE PERIOD # 4.21 SEC SQ+ STANDARD DEVIATION OF PERIOD # 2.05 SEC+

. AR FT

11

6 571 857

:

69 80 8.25 143 571 1000 857 5.00• 7.60 206 286 8.00 AVERAGE SIG. MEIGHT # 1.65 FT VARIANCE OF SIG. MEIGHT # .29 FT SQ STANDARD DEVIATION OF MEIGHT # .54 FT AVERAGE WAVE PERIOD # 7,46 SEC*
VARIANCE OF WAVE PERIOD # 9,56 SEC 80*
STANDARD DEVIATION OF PERIOD # 3,09 SEC*

CUM. HOP TOT. AVG. 6 1000 .00 1000 .00 1000 .00 1000 1.07

1000 1.07 946 1.18 848 1.57 796 1.63 623 2.00 461 1.66 365 1.63 216 1.93 162 2.14 132 1.50 108 1.60 12 1.50 6 1.50

12

RESULTS OBTAINED FROM 7-MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE HAVE GAGE LOCATED NEAR VENTURA COUNTY HARBOR CALMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

185 OBSERVATIONS SUMMARY FOR AUG 62 PERIOD (SECS) HEIGHT (PT) CUM. ROM 2.0 - 1.9 2.0 - 2.4 2.5 - 2.9 3.0 - 3.4 3.5 - 3.9 4.0 - 4.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 10.0 - 10.9 11.0 - 11.9 12.0 - 12.9 13.0 - 13.9 14.0 - 14.9 15.0 - 15.9 TOTAL CUL. AVG. -1.2 -1.8 -2.5 -3.1 -3.7 -4.4 TOT.+ 1000 .00
1000 .00
1000 .00
1000 .86
989 1.50
987 1.71
902 2.00
672 1.88
508 2.12
344 2.16
137 2.06
49 2.78
27 2.14
22 1.71
5 .00
5 2.14 11 11 22 66 230 164 164 208 87 22 5 22 38 65 103 70 59 27 16 114 16 54 81 27 3A 32 16 43 27 11 16 5 5 330 551 7.35 5 54 395 1000 946 5.81* 6.84 7.15

AVERAGE SIG. HEIGHT = 2.00 FT VARIANCE OF SIG. HEIGHT = .40 FT SQ STANDARD DEVIATION OF HEIGHT = .61 FT AVERAGE WAVE PERIOD # 7.15 SEC* VARIANCE OF WAVE PERIOD # 3.65 SEC SOS STANDARD DEVIATION OF PERIOD # 1.91 SEC* .63 FT

341 OBSERVATIONS SUMMARY FOR SEP 62 SEP 63
RIOD HEIGHT (FT)

1

18.

AVERAGE SIG. HEIGHT = 1,74 FT AVERAGE HAVE PERIOD = 8.00 SECON VARIANCE OF SIG. HEIGHT = .44 FT SQ VARIANCE OF HAVE PERIOD = 7,35 SEC SQUISTANDARD DEVIATION OF PERIOD = 2.71 SECON VARIANCE OF HAVE PERIOD = 2.71 SECON VARIANCE OF HAVE


RESULTS ORTAINED FROM 7=MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED NEAR VENTURA COUNTY HARBOR CALMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

372 OBSERVATIONS SUMMARY FOR OCT 62 OCT 63 PERIOD HEIGHT (FT) (SECS) CUM. ROW TOT.* AVG.* 1000 .00 1000 .00 1000 .00 1000 .00 986 .86 981 1.62 924 1.56 862 1.75 792 2.07 722 2.31 438 2.17 308 2.45 438 2.17 308 2.45 438 2.17 308 2.45 438 2.17 308 2.45 438 2.16 89 1.50 14 2.52 2.10 .0 - 1.9 2.0 - 2.9 3.0 - 3.4 4.0 - 3.9 5.0 - 5.9 6.0 - 6.9 7.0 - 7.9 8.0 - 8.9 11.0 - 11.9 12.0 - 12.9 13.0 - 12.9 13.0 - 12.9 14.0 - 14.9 15.0 - 15.9 16.0 - 15.9 -1.2 -1.8 -2.5 -3.1 -3.7 -4.4 -5.0 +5.7 -6.3 TOT . * 22 51 38 35 54 70 59 43 27 22 5 13 30 30 35 46 40 19 3 3 11 5 5 5 11 5 24 16 24 19 3 3 3 3 3 11 3 3 1000 5 258 487 108 228 11.50 3 27 34 10.90 TOTAL 413 919 9.89 121 11.56 COL. AVG.

AVERAGE SIG. HEIGHT # 2.10 FT AVERAGE WAVE PERIOD # 10.43 SEC*
VARIANCE OF SIG. MEIGHT # 1.00 FT SO VARIANCE OF WAVE PERIOD # 7.53 SEC SQ*
STANDARD DEVIATION OF HEIGHT # 1.04 FT STANDARD DEVIATION OF PERIOD # 2.74 SEC*


BEST AVAILABLE COPY

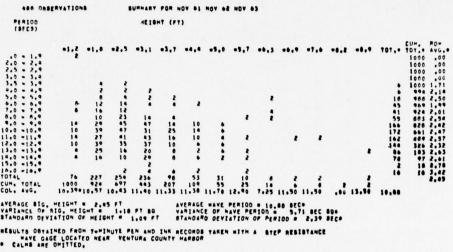

Wave beights may be low due to old gage design and maintenance difficulties.

446 083	FRVATION	•	•	UMMARI	F 0 1	15. 01	UEC 62	DEC 6	•				
PERIOD				HE 10	HT CF1)							
(SECS)													
												CUM.	ROW
	-1.2	.1.8	.2.5	.3.1	-3.7	-4.4	-5.0	.5.7	*6.3	.6.9	TOT.	101.	AVG.
.0 - 1.9	54											1000	.00
2.0 - 2.4												1000	.00
2.5 . 2.9												1000	.00
3.0 - 3.4												1000	.00
5.5 - 3.9												1000	.00
4.0 - 4.9												1000	.00
5.0 - 5.9	5	4	5		. 5				2		13		2.57
6.0 - 6.9	6	6	4	4	5						53		1.85
7.0 - 7.9		14	14	6					5		38		15.5
8.0 - 8.9	2	50	A	12	14	6		5			68		2.58
4.0 - 9.9	4	35	20	35	55	2	4	2		2	128		2,58
10.0 -10.9	2	48	50	40	50	14	6				198		2.50
11.0 -11.9	6	56	34	36		14	6 8	2	2		177		2.45
12.0 -12.9	6	46	40	36	10	6	. 8	4			166		2.42
13.0 -13.9		14	30	10	10						75	188	5.18
14.0 -14.9	4	35	5.5	12	4	6					85	113	2.12
15,0 -15,9		8									4		1.50
16.0 -16.9			4	27.60.0	6	2	. 5				23	53	2.66
TOTAL	93	286	230	190	105	50	58	10	6	5			5.33
UM. TOTAL	1000	907	621	391	505	97	46	18		5			
OL. AVG.	10.76*	11.30	11.43	11.01	10.90	11.46	11.64	10.90	8.17	9.50	11,20		
VERAGE SIG.	-		1		7	VERAGE	MAVE	PERIOD		30 SEC			
ARIANCE OF	-10 451	CH		FT 50		ARIANC				20 310	8 84C		

BEST AVAILABLE COPY

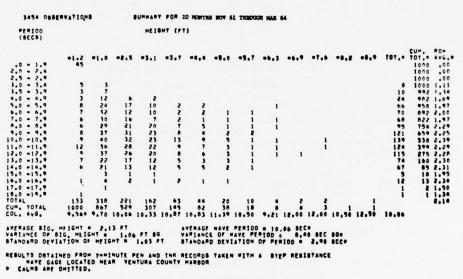

Mere heights may be low due to old gage design and maintenance difficulties.

Table A-55. Regression equations used to compensate significant height statistics for Port Hueneme, California.

Date	Compensation equations (ft)
1961 to Mar. 1964	$H_{NEW} = 0.54 + 0.64 H_{OLD}$
Apr. 1964 to 1965	No compensation

H_{NEW} = estimate of significant height that would have been obtained by the CERC method of pen and ink record analysis (based on reanalysis of 2 months of data from Huntington Beach, California)

H_{OLD} = significant height obtained by old method of pen and ink record analysis.


Table A-56. CERC wave gage history for Pt. Mugu, California (Gage No. 3).

	aim.	Pier Length (feet)	
	LOCATION: Three miles southeast of Port Hueneme, Pt. Mugu, California (Gage No. 3)	Distance from seaward end of pier	shore.
	Port Huener	Water Depth (ft MSL)	31
	es southeast of] 3)	Gage Range (ft MSL)	-11 to +19 (mounted 29 ft below MSL)
	Three miles s (Gage No. 3)	Gage Length (feet)	
	LOCATION:	. Explanation	Still operative as of 1 Jan. 1975
	Ä.	End of Proper Operation	
7	07' N., 119°09'	Beginning of Proper Operation	27 Mar. 1970
CEUC Form 174-74	18 Har 74 COORDINATES: 34°07' N., 119°09' W.	Type of Gage	Fressure


Table A-57. Number of analyzed records from Pt. Mugu, California (Gage No. 3). 1

YR MO	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NØV	DEC	тот
1972		107	123	93	100	118	96	111	106	118	62	85	1119
1973	33	78	65	62	66	86	66	84	86	81	106	53	866
1974	100	99	92	71	99	96	88	79	56	74	99	84	1037


¹From 1,024-second records taken four times daily. Results from records taken before January 1973 have not been compensated for hydrodynamic attenuation due to submergence of the gage. Results taken during January 1973 to December 1974 may have been overcompensated such that significant heights are up to 20 percent too high and wave periods tend to be too short.

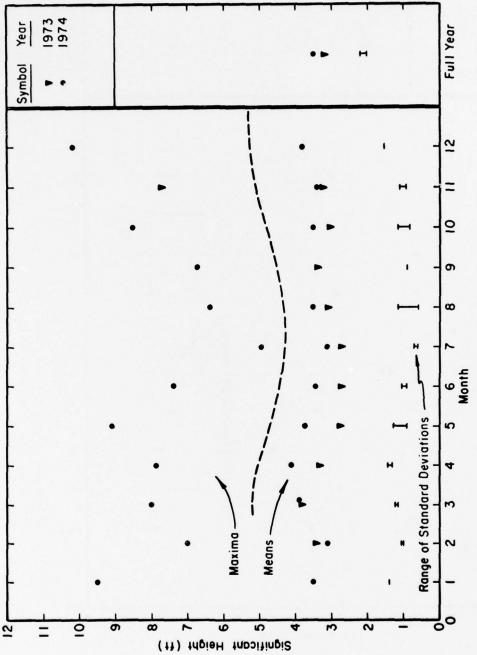

Maxima, means, and standard deviations of significant height from Pt. Mugu, California (Gage No. 3). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that significant heights are up to 20 percent too high. Figure A-88.

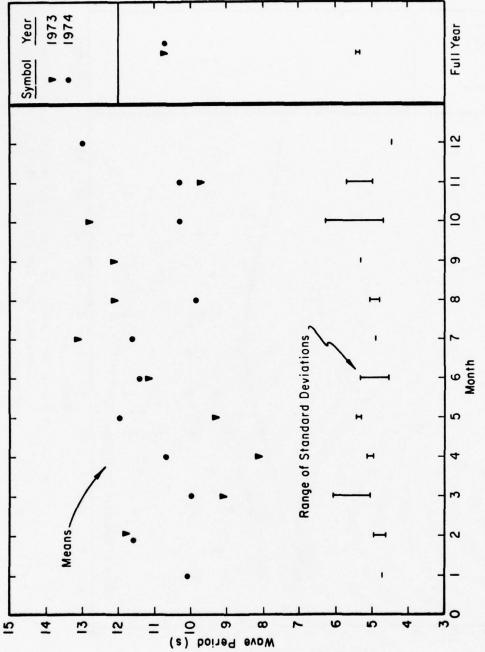


(Gage No. 3). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that wave periods tend to be too short. Means and standard deviations of wave periods for Pt. Mugu, California Figure A-89.

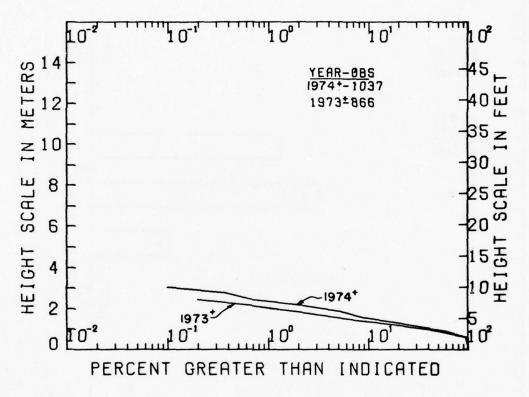

+ = computed from 1,024-second digital wave records taken four times daily; results may have been overcompensated such that significant heights are up to 20 percent high.

Figure A-90. Annual cumulative significant height distributions from Pt. Mugu, California (Gage No. 3).

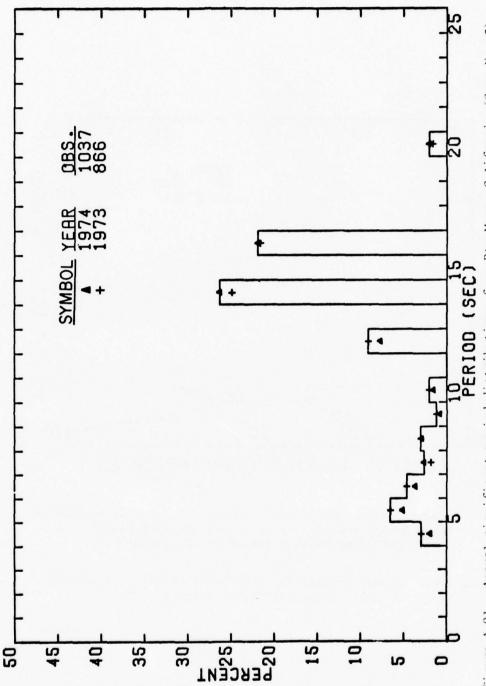

Annual significant period distributions from Pt. Mugu, California (Gage No. 3). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that wave periods tend to be too short; periods less than 4 seconds have been omitted. Figure A-91.

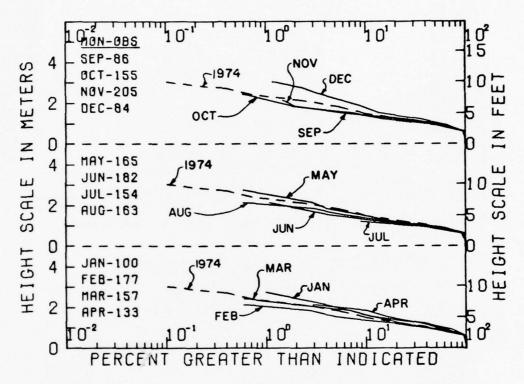


Figure A-92. Seasonal summaries of cumulative significant height distributions from Pt. Mugu, California (Gage No. 3). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that significant heights are up to 20 percent too high.

Table A-58. Wave climate for Pt. Mugu, California.
Distribution of significant height versus period
(in observations per 1,000 observations).

100 OBSF	RVATIONS		UMMAR	Y FOR J	IAN 74							
PERIOD (SECS)			816	. HEIGH	(FT)							
	0=1 1=2	2+3	3-4	4-5	5-6	6-7	7-8	8-9	9-10	101.*	CUM .	
0.09											1000	0,00
1.0 - 1.9											1000	0.00
2.0 - 2.9											1000	0.00
3.0 . 3.9	10	100	60		10					180	1000	2.94
4.0 - 4.9			50	10						30	820	3.83
5.0 - 5.9		10	50			10				40	790	4.00
6.0 . 6.9		30 20	10				10			30	750	4.50
7.0 - 7.9		30	50	20	10					80	720	3,63
8.0 - 8.9		50	50		10	10	10		10	110	640	4.68
9.0 . 9.9		10					10			50	530	5.00
10.0 -10.9		50								20	510	2,50
11.0 -11.9											490	0.00
12.0 -12.9	20	60	50							100	490	2.50
13.0 -13.9											390	0.00
14.0 -14.9	20	80	70	70	20	10				270	390	3,57
15.0 -15.9											120	0.00
16.0 -16.9		80	30	10						120	120	2,92
TOTAL	50	420	300	110	50	30	30		10			3.46
CUM. TOTAL	1000 1000	950	530	230	120	70	40	10	10			
COL. AVG.	0.00*11.50	10.48	9.37	12.50	9.70	9.50	6.17	0.00	8.50	10,26		

AVERAGE SIG. HEIGHT = 3.47 FT
VARIANCE OF SIG. HEIGHT = 1.97 FT SG
STANDARD DEVIATION OF HEIGHT = 1.40 FT

AVERAGE WAVE PERIOD = 10.06 SEC*
VARIANCE OF WAVE PERIOD = 21.99 SEC SQ*
STANDARD DEVIATION OF PERIOD # 4.69 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 3)

WAVE GAGE LOCATED AT 3 MI SE OF PORT MURNEME.

CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

177 OBS	ERVATIONS		8	UMMARY	FOR I	E8 73	PEB 74					
PERIOD				SIG.	HEIGH	4T (FT)						
(SECS)												
	0=1 1=		2-3	3-4	4.5		407		TOT.*	CUM.	ROW	
.09	0-1 1-		,	,,,,	4.,	500	••,	,	101.			
.0 - 1.9											0.00	
2.0 - 2.9											0.00	
3.0 - 3.9			96	28							0.00	
.0 - 4.9		6	6						136		2.75	
.0 - 5.9		• .	6	. 6	11				53		3.00	
.0 - 6.9				11	11		6		34		4.17	
7.0 - 7.9				11		6	6	6	58		5.30	
			53	52					34		3.63	
.0 - 8.9			53	11	17				56		3.70	
.0 - 9.9				11	6	6			52		4.25	
0.0 -10.9			11	17					58		3.10	
.0 -11.9											0.00	
2.0 -12.9		6	68	11	6				90	638	2.69	
13.9										548	0.00	
1.0 -14.9	1	7	147	85	51				299	548	3.07	
.0 -15.9										249	0.00	
.0 -16.9			102	79	40	11			535	249	3,33	
.0 -17.9										17	0.00	
.0 -18.9											0.00	
.0 -19.9											0.00	
9.05- 0.0			11		6				17		3.17	
.0 +									• '	• •	0.00	
TAL		34	175	294	147	23	23	6			3.24	
M. TOTAL	1000 100		766	492	198	51	28	Ă				
L, AVG.	0.00-10.6						7.00	6,50	11.63			
ERAGE SIG.	HEIGHT . 3	. 23	1			VERAGE	HAVE F	ERIOD	. 11.	49 BEC		
RIANCE OF	SIG. HEIGHT	. !	.01	FT 50	٧	ARTANCI						80
ANDARD DEV	IATION OF HE	TOHT		1.00 .		TANDAR						

197 DBSER	VATION	•		UMMARY	FOR	MAR 73	MAR 7	•				
PERIOD (SECS)				81G.	HE 16	HT (FT)						
	001	1-2	203	3-4	4.5	4.4	4.7	7-0		101.0	CUM.	RDW
0.00	0-1	1-4	***	,	•••	300	••,	,		101.		0.00
1.0 - 1.0												0.00
2.0 - 2.9												0.00
3.0 - 3.9			97	108	51	13	13			146		3.63
4.0 . 4.9				32	19	13	• -			64		4.20
5.0 - 5.9				25	57	13	10			121		4.61
4.0 - 4.9				13						30	567	5.67
7.0 - 7.4			•	13		•				35		3.40
0.0 . 0.0				•						13		4.00
							•			13		5.50
10.0 -10.9												0.00
11.0 -11.9												0.00
12.0 -12.0			•	52	1.		•			37		4.00
13.0 -13.0					_							0.00
14.0 -14.9		•	102	51	45	•				5:0		3.23
15.0 -15.9												0.00
10.0 -10.9			51	64	91					166		3.50
17.0 -17.0												0.00
18.0 -18.9												0.00
20.0 -19.9			25	13						36		2.83
21.0 +			.,	1,						,,,		0.00
TOTAL			255	350	268	51	51	13				3.04
CUM. TOTAL	1000	1000	994	739	389	121	70	10	:			
COL. AVG.			12.50	9.32	4.38		50		50	4.48		
AVERAGE BIO. H	EIGHT	. 3.	85 FT			AVERAGE	MAYE	PERIO		. 43 BEC	•	
VARIANCE OF BI	G. HEI		1,31	FT 80		VARIANC						
STANDARD DEVIA	TION D	FHEI	GHT .	1.17 F	7	STANDAR	D DEV	MOITAL	OF PE	4100 .	8.67	
RESULTS OSTAIN		H 102			TAI .		TARFN	-			0. 11	
HAVE GAGE	LOCAT	ED AT	1 MI	S DE	DRT H	IENEME.						
. CALME ARE O						0						

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

										CUM.	
	0-1	1-5	5-3	3-4	4-5	5-6	6-7	7.8	TOT.		
.09											0.00
0 - 1.9										1000	
.0 - 2.9										1000	
.0 - 3.9		15	158	30	30	8			511		5.96
0 . 4.9			8	8	8	8			30		4.00
0 - 5.9			8	15	38	15	-38	15	128		5.32
0 . 6.9					53	30	5.2	15	128		5,38
0 - 7.9				15	15		15		45		4.83
0 . 8.9				. 6	8				15		4.00
0 - 9.9											0.00
0 -10.9											0.00
0 -11.9											0.00
0 -12.9			8	5.3	8				45		3.17
0 -13.9											0.00
0 -14.9		8	90	113	15				226		3.10
0 -15.9											0.00
0 -16.9			90	53	23				165	173	3.09
0 -17.9											0.00
0 -18.9										8	0.00
0 -19.9										8	0.00
0 -20.9			8						8	8	2.50
0 +											0.00
AL		30	338	271	195	60	75	30			3.76
. TOTAL	1000	1000	970	632	361	165	105	30			-
. AVG.	0.00*		10.94	11.94	7.92	5,63	6.20	6.00	9.59		

AVERAGE SIG. HEIGHT = 3.34 FT AVERAGE WAVE PERIOD = 10.88 SEC*
VARIANCE OF SIG. HEIGHT = 1.43 FT SG VARIANCE OF WAVE PERIOD = 30.26 SEC SQ*
STANDARD DEVIATION OF HEIGHT = 1.20 FT STANDARD DEVIATION OF PERIOD = 5.50 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 3)
WAVE GAGE LOCATED AT 3 MI SE OF PORT MUENEME.

CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

PERIOD				SIG.	HEIGH	IT (FT)					
(SECS)											
										CUM.	ROW
	0-1	1.5	2-3	3-4	4-5	5.6	6-7	7-8	TOT.*	TOT	AVG
0.09										1000	0.00
1.0 - 1.9										1000	0.00
2.0 - 2.9										1000	0.00
3.0 - 3.9		27	71	60			11	11	181	1000	3,23
4.0 - 4.9				5				•	5		3,50
5.0 . 5.9			5	27	55	5			60		3.95
6.0 - 6.9				5	16	11			33		4.67
7.0 . 7.9				5	•	5			11		4.50
8.0 . 8.9			5	5	5				16		3.50
9.0 - 9.9				11					11		3.50
0.0 -10.9		5	5	11					22		2.75
1.0 -11.9				• •							0.00
2.0 -12.9		27	77	38					143		2.58
3.0 -13.9		•		•							0.00
4.0 -14.9		11	203	55	16				286		2.77
5.0 -15.9		••							200		0.00
6.0 -16.9		5	88	104	33				231		3.21
OTAL		77	456	330	93	22			231		3.10
UM. TOTAL	1000	1000	923	467	137	44	11	11			
OL. AVG.				11.32		6.50	3,50	3.50	11.50		
	0.004			11136	11,32	0.50	3,30	3.30	11.000		
VERAGE SIG. H	FIGHT I					VERAGE		-			
RIANCE OF ST		CHT				VETAGE		- F 4 1 0 0	2111	35 350	
TANDARD DEVIA	TION OF	GMT B F MFIG	1.01	1.01 5		ARIANC	E OF W	AVE PE	RIOD .	24.6	4 . 81

Sist All All Copy

AVERAGE SIG. MEIGHT + 2.93 FT AVERAGE MAYE PERIOD + 12.28 SEC VARIANCE OF SIG. MEIGHT + 44 FT SIG. MAYER PERIOD + 24.35 SEC SOF STANDARD DEVIATION OF MEIGHT + 46 FT STANDARD DEVIATION OF PERIOD + 4.93 SEC

RESULTS OSTATNED FROM 1024-SECOND DIGITAL RECORDS TAKEN MITM A PRESSURE (NO. 3) MAYE GARE LOCATED AT 3 MI SE OF PORT MUENEME,

CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

105 0891	RVATIONS			-	98 73	AUG 74			
PER100 (SECS)			\$10.	HEIGHT	(FT)				
	0-1 1-8	2-5	5.4	4.5	5-6	6-7	f01.0	tor	****
0.0								1000	
1.0 - 1.0									0.::
5.0 - 5.4									0.::
3.0 - 3.0		31		37	52	1.	198		4.:0
4.0 - 4.4							15		
5.0 - 5.4		•	31	12	•		• 5		3.4:
• • • • • •			:	1.0		•	52		4.75
7.0 - 7.4			•				•		3.50
		25							2.5:
•.0 - •.•		19					55		2.5:
10.0 -10.0		1.	12	•			17		3.17
11.0 -11.0				12					0.::
12.0 -12.0		••	37	14			130		2.45
13.0 -13.0		167	148						0.::
14.0 -14.0		10,	140				321		2.44
15.0 -15.0				1.					21.0
17.0 -17.9		••		1.4			150		3.16
									0.:2
18.0 -18.9									0.1:
								17	0.1:
20.0 -20.0			1.				1.0	1.	3.5:
21.3 ·					••				0.00
CUT. TOTAL			580	111	31	25			3.33
COL. AVE	1000 1000			. 74	. 20	. 25			

AVERAGE SIG. MEIGHT # 3.20 FT VARIANCE OF SIG. MEIGHT # .75 FT 80 VARIANCE OF NAVE PERIOD # 25.12 BEC 80* STANDARD DEVIATION OF MEIGHT # .86 FT STANDARD DEVIATION OF PERIOD # 5.01 BEC

RESULTS OBTAINED FROM 1020-SECONO DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 3) MAYE GAGE LOCATED AT 3 MI SE OF PORT MURNEME.

• CALMS ARE OMITTED.

86 DBSERVATIONS SUMMARY FOR SEP 73 PERIOD (SECS) SIG. HEIGHT (FT) TOT.* AYG.*
1000 0.00
1000 0.00
1000 4.28
791 3.50
779 0.00
756 0.00
756 0.00
751 3.17
686 0.00
686 2.83
651 0.00
551 2.66
395 0.00
395 3.35
3.42 0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
9.0 - 9.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 15.9
15.0 - 15.9
15.0 - 15.9
15.0 - 15.9
16.0 - 10.9 0-1 1-2 5.3 3-4 4.5 5-6 101. 53 47 93 47 209 12 12 12 12 52 53 15 35 52 12 23 12 35 174 70 12 256 0.00 3.35 3.42 140 407 1000 1000 1000 0.00* 0.00 13.87 174 326 593 81 209 267 9.72 395 4.10 12,27

AVERAGE SIG. HEIGHT # 3.38 FT

VARIANCE OF SIG. HEIGHT # .75 FT 8G

STANDARD DEVIATION OF HEIGHT # .87 FT

AVERAGE HAVE PERIOD # 12.13 SEC*

VARIANCE OF HAVE PERIOD # 28.32 SEC 8G*

STANDARD DEVIATION OF PERIOD # 5.32 SEC*

RESULTS OBTAINED FROM 1024-SFCOND DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 3)

WAVE GAGE LOCATED AT 3 MI SE OF PORT HUENEME.

CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

155 OBSERVATIONS SUMMARY FOR OCT 73 OCT 74

PERIOD SIG. HEIGHT (FT) (SECS)

CONTRACTOR OF THE PARTY OF THE

.

	0-1 1-2	2.3	3-4	4-5	5+6	6=7	7.8	8-9	101.		ROW AVG
0.09		1997			-					1000	0.00
1.0 - 1.9											0.00
2.0 . 2.9											0.00
3.0 . 3.9	•	103	84	26	19				239	1000	
4.0 . 4.9				•••	•					761	3.50
5.0 . 5.9			19	13					32		3,90
6.0 - 6.9			19	13	13	6			45		5.36
7.0 . 7.9											0.00
8.0 . 8.9											0.00
9.0 . 9.9											0.00
10.0 -10.9		1 9	6						26		2.75
11.0 -11.9		•									0.00
12.0 -12.9		52	6						58		2,61
13.0 -13.9			•						30		0.00
14.0 -14.9	35	103	84	13	6	6			245		3,00
15.0 -15.9						•					0.00
16.0 -16.9		148	142	13	13				316		3.15
17.0 -17.9									210		0.00
18.0 -18.9											0.00
19.0 -19.9											0.00
20.0 -20.9		1 *							31		3.50
21.0 +		• •		•					,,	•	0.00
TOTAL	39	445	361	77							3.24
CUM. TOTAL	1000 1000	961	516	155	56	13					-,
COL. AVG.	0.00-12.67	12.47	11.68	9.50	10.17	10.50	0,00	6.50	11.70	•	

AVERAGE SIG. MEIGHT # 3.25 PT

VARIANCE OF SIG. MEIGHT # 1.00 FT SG

STANDARD DEVIATION OF MEIGHT # 1.00 FT

STANDARD DEVIATION OF MEIGHT # 1.00 FT

BEST AVAILABLE COPY

205 0888	RVATION		UMM484	FOR N	0¥ 73							
(8163)				816,	HEIGH	1 (FT)						
	0-1	1.2	2.3	3.4	4-5	5.0	4-7	1.6	101.	CUM.	*O-	
0.0	•		•••				•				0.00	
1.0 - 1.9											0.00	
2.0 - 2.9										1000	0.00	
3.0 . 3.0			117	73	50	10			224	1000	3.11	
4.0 - 4.4			15	20	10					776	3.54	
5.0 . 5.4			10	24	34	,			78	732	3.94	
			10	10	10	10	9	10	54	654		
7.0 - 7.9			•	24					29	600	5.55	
8.0 . 8.9			5.	15	10					571	3.20	
.0 . 9.9										522	0.00	
10.0 -10.0			10	5					15	255	2.83	
11.0 -11.0											0,00	
12.0 -12.9		•		5	•				39		2.67	
13.0 -13.9											0.00	
14.0 -14.9			127	48	34	10			248	449	3,23	
15.0 -15.0										100	0.00	
10.0 -10.4			54	76	20	5		5	161		3,47	
17.0 -17.0											0.00	
18.0 -18.9											0.00	
14.0 -14.4											0.00	
50.0 -50.0				10	10				50	50	4.00	
21.0 +				12,000	0.000			-			0.00	
TOTAL	200 (200 V/m)	10	415	366	151	30	,	15			3,37	
CUM. TOTAL	1000	1000	990	576	510	50	50	15				
COL. AVG.	0,000	8,00	10,10	10.63	10.00	8.88	.50	4.83	10,23			
AVERAGE SIG.												
VARIANCE OF &				FT 80	:		0 .					
STANDARD DEVI				1.00 .	, :		DEVI					
		-610	C1 -	10.0						100 -	1116	

RESULTS OBTAINED FROM 1020-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (ND. 3) MAYE GAGE LOCATED AT 3 MI SE OF PORT MUENERS. CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

0842			•	UPHARY	FOR O	FC 74								
PER100				.10	HE1GH	T (FT)								
	••1	1-2	2-5	5-4	4+5	4-6	4.7	7-8	8-9		10-11	TOT.	CUM.	AVG.
0.0	•			,	•••	,	•	,						0.00
1.0 - 1.4														0.00
2.0 . 2.4														0.00
3.0 - 3.4		12	34	12	12							71		2.83
4.0 - 4.9		••		• •										0.00
5.0 . 5.9				12			12					24		5.00
					12	12	•			18		34		4.50
7.0 . 7.0				12	12	15	54					40		5.30
			24	7000	12	15						46	810	3.75
				15								15		3.50
0.0 -10.4			15	15								54		3.00
1.0 -11.0														0.00
2.0 -12.4		15	12	30										5.40
3.0 -13.9		-0.0		796.60	-		200		(r/au)					0.00
4.0 -14.4		5.		6.3	63		5.		15			274		3.93
5.0 -15.9					2									0.00
16.4			143	107	43	15					15	357		3.65
7.0 -17.4														0.00
6.0 -18.9														0.00
.0 -1.*														0.00
0.0 -20.4			15	54								36		3.11
1.0 .											12			3,0
U". TOTAL		**	214	310	514		• 0	••	12	12	18			4,00
OL. AVG.		000	452	667	557	4.75		. 34	36		14.50			
	0.00-11		13.67	1 0 -	13.30	4.75	4.40	0.00	14.50		10.30	13.17		

VARIANCE OF SIG. MEIGHT = 2,30 PT SO VARIANCE OF MAYE PERIOD = 20.14 SEC SQ. STANDARD DEVIATION OF PERIOD = 4.49 SEC.

1760 OBSERVATIONS	SUMMAR	Y FOR	21 months I	eb 73 Thr	ough Dec 7	4			
PERIOD (SECS)	810	. HEIGHT	(FT)						
0-1 1-2	2-3 3-4	4-5	5.6 6.	7 7-8	• • •	-10 10-11	TOT		ROW AVG.
0.09	503 300	4.5	300 60	, ,•0		-10 .0-1	, 01,	1000	
1.0 - 1.9								1000	
2.0 - 2.9								1000	
3.0 - 3.9 7	87 57	25	10	4 2			193		
4.0 - 4.9	3 12		5				24	807	3.71
5.0 - 5.9	7 19	21	5	7 1 5		1	60	784	4.35
6.0 - 6.9	4 7		8	5 5	1	1	43		
7.0 - 7.9	4 10	4		3 1			24		4.22
8.0 - 8.9	11 9	6		1 1		1	30		3.75
9.0 - 9.9	4 3		1	1 1			10		3.72
10.0 -10.9	10	1					18		2.92
11.0 -11.9									0.00
12.0 -12.9	51 22	5		1			85		2.79
13.0 -13.9			_						0.00
14.0 -14.9	125 65	27	5	2	1		270		3.10
15.0 -15.9							22"		0.00
16.0 -16.9	96 91	31	4	1		1	224		3.27
17.0 -17.9									0.00
18.0 -18.9									0.00
19.0 -19.9	. 7	3					19		3.24
21.0 +	· · · · · · · · · · · · · · · · · · ·	,	1				1.4		0.00
TOTAL 28	419 335	141	39 2	3 11	2	2 1			3.38
CUM. TOTAL 1000 1000	972 553		77 3			,			
	11.67 11.63		7.84 6.9		9.17 6	.83 16.50	11.18		
AVERAGE SIG HEIGHT = 3.3		AV	ERAGE MAV	E PERIOD	= 11.01	SEC.			
VARIANCE OF SIG. HEIGHT	1.25 FT S	Q VA	RIANCE OF	WAVE PE	RIOD =	27.85 SE			
STANDARD DEVIATION OF HEIG	S1.12	FT ST	ANDARD DE	VIATION	OF PERIO	0 = 5.28	SEC.		
RESULTS OBTAINED FROM 1024				-	PRESSUR	E (NO. 3			
WAVE GAGE LOCATED AT	3 MI SE OF	PORT HUE	NEME.						
* CALMS ARE OMITTED.									

NOTE: Results may have been overcompensated such that significant heights are up to 20 percent too high and wave periods tend to be too short.


Table A-59. CERC wave gage history for Pt. Mugu, California (Gage No. 4).

		5.0	
	rnia	Pier Length (feet)	
	lugu, Califo	Distance from seaward end of pier	shore
	ne, Pt. N	1	shore 1,300 f
	Port Huener	Water Depth (ft MSL)	31
	LOCATION: Three miles southeast of Port Hueneme, Pt. Mugu, California (Gage No. 4)	Gage Range (ft MSL)	-11 to +19 (mounted 29 ft below MSL)
	Three miles s (Gage No. 4)	Gage Length (feet)	1
	0CAT10N:	Ę	1 Jan. 1975
	٦	Explanation	Still operative as of 1 Jan, 1975
	w.	End of Proper Operation	
7,	07' N., 119°09'	Beginning of Proper Operation	27 Mar. 1970
CERC Form 174-74 18 Mar 74	COORDINATES: 34°07' N., 119°09' W.	Type of Gage	Pressure
CERC Form	COORDINATES	Type of Gag	Pressure


Table A-60. Number of analyzed records from Pt. Mugu, California (Gage No. 4). 1

MO YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	NOV	DEC	тот
1973													759
1974	101	100	94	70	99	96	82	78	49	55	99	92	1015


¹From 1,024-second records taken four times daily. Results from records taken before January 1973 have not been compensated for hydrodynamic attenuation due to submergence of the gage. Results taken during January 1973 to December 1974 may have been overcompensated such that significant heights are up to 20 percent too high and wave periods tend to be too short.

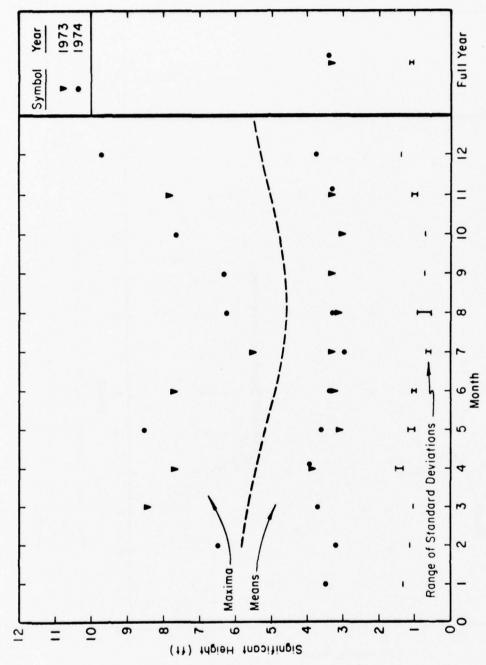

Maxima, means, and standard deviations of significant height from Pt. Mugu, California (Gage No. 4). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that significant heights are up to 20 percent too high. Figure A-93.

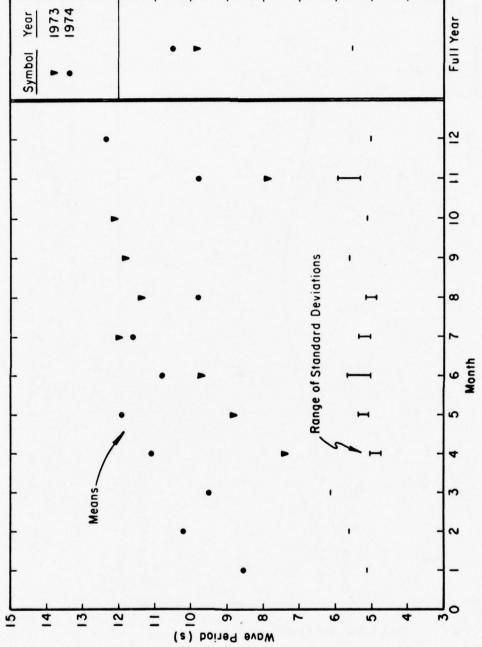


(Gage No. 4). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that wave periods tend to be too short. Means and standard deviations of wave periods for Pt. Mugu, California Figure A-94.

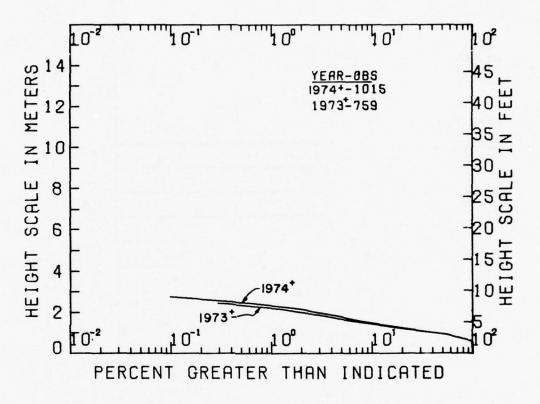

1

+ = computed from 1,024-second digital wave records taken four times daily; results may have been overcompensated such that significant heights are up to 20 percent too high.

Figure A-95. Annual cumulative significant height distributions from Pt. Mugu, California (Gage No. 4).

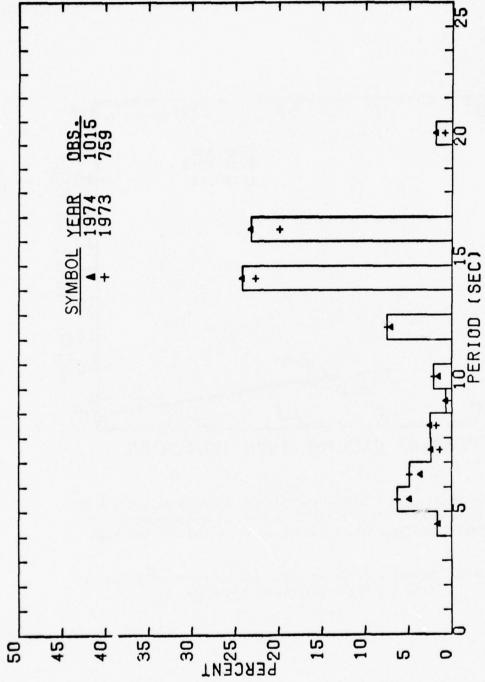

1

Annual significant period distributions from Pt. Mugu, California (Gage No. 4). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that wave periods tend to be too short; periods less than 4 seconds have been omitted. Figure A-96.

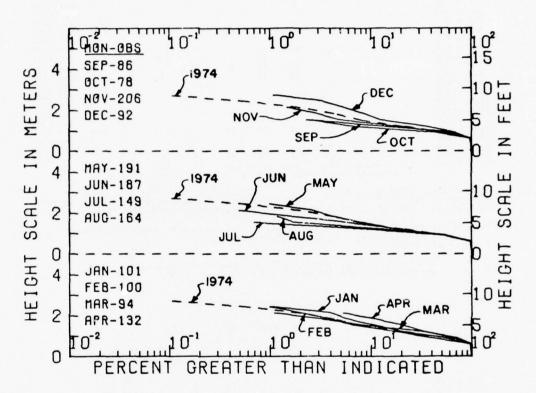


Figure A-97. Seasonal summaries of cumulative significant height distributions from Pt. Mugu, California (Gage No. 4). Computed from 1,024-second digital wave records taken four times daily. Results may have been overcompensated such that significant heights are up to 20 percent too high.

Table A-61. Wave climate for Pt. Mugu, California.

Distribution of significant height versus period (in observations per 1,000 observations).

101 DBSERVATIONS		BUMMAR	Y FOR	JAN 74						
PERIOD (SECS)		816	. HE10	HT (FT)						
0-1 1-	5 5-3	3-4	4-5	:5=6	6-7	7-8	8-9	101.		AVG.
1.0 - 1.9										0.00
2.0 • 2.9										0.00
3.0 - 3.9	267	99		10				376		2.84
4.0 - 4.9	••.	10		••				10		3.50
5.0 . 5.9	10	50				10		40		4.25
6.0 . 6.9	10		10			10		30		4.83
7.0 - 7.9		10	10	20	10			50		5.10
8.0 - 8.9		40	10			10	10	69		4.93
9.0 • 9.9					10			10	426	6.50
10.0 -10.9	10							10		2.50
11.0 -11.9										0.00
12.0 -12.9	0 40	50						99		2.90
13.0 -13.9										0.00
14.0 -14.9 1	0 40	79	59	50				508		3.69
16.0 -16.9	0 40	40								0.00
TOTAL	-	347	10	50	20	30		99	**	3.00
CUM. TOTAL 1000 100		554	208	109	59	40	10			3,43
COL. AVG. 0.00+14.5			12.60	9.50	8,50	6.83	8,50	8,82		
AVERAGE SIG. HEIGHT = 3	.45 FT			AVERAGE	HAVE	PERIOD	. 8.	56 SEC		
VARIANCE OF SIG. HEIGHT	. 1.72	FT 80		VARIANCE						800
STANDARO DEVIATION OF HE	IGHT .	1.31 6		STANDAR						

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN HITH A PRESSURE (NO. 4)
HAVE GAGE LOCATED AT 3 MI SE OF PORT HUENEME.

CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

99 085ER	VATIONS	S	UMMARY	FOR FE	6 74				
PERIOD (SECS)			SIG.	HEIGH	(FT)				
								CUM.	ROW
	0-1 1-2	2.3	3-4	4-5	5-6	6-7	TOT.	TOT.	AVG.
0.09								1000	0.00
1.0 - 1.9								1000	0.00
2.0 - 2.9								1000	0.00
3.0 - 3.4		212	71	10	10	10	313	1000	3.02
4.0 - 4.9				10			10	687	4.50
5.0 - 5.9			50	10		10	40		4.50
6.0 - 6.9			10			10	50	636	5.00
7.0 - 7.9								616	0.00
8.0 - 8.4				50	10		30	616	4.83
9.0 - 9.9								586	0.00
10.0 -10.9								586	0.00
11.0 -11.9								586	0.00
12.0 -12.9		51	10				61		2.67
13.0 -13.9								525	0.00
14.0 -14.9		212	51	51			313		2.98
15.0 -15.9			-						0.00
16.0 -16.9		131	61	10	10		515		3.02
TOTAL		606	555	111	30	30			3.16
CUM. TOTAL	1000 1000	1000	394	172	61	30			
COL. AVG.	0.00 * 0.00	10.92		10.86	9.50	5.17	10.55		
AVERAGE SIG.	EIGHT . 3.	13 FT			FRAGE	MAVE	PERIOD	. 10.	2 8EC*
VARIANCE OF ST	G. HEIGHT .	. 91	5 FT 50	V	RIANC	E OF W	AVE PER	100 .	31.37 SEC 80*
STANDARD DEVI		GHT .	.99 F	T S	TANDAR	D DEVI	ATTON C	F PER	100 . 5.60 SEC

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 4)
WAVE GAGE LOCATED AT 3 MI SE OF PORT MUENEME.

CALMS ARE OMITTED.

*4 0888	RVATION	•		UMMAR	7 FQR	44 74					
PER100 (BECS)				*16	. HE 18:	4T (FT)					
		1-2	2-3	3.4	4-5	5-6	407	***	101.0	cu.	ROW .
	0-1	1-6		,		,	•		1016-	1000	
0.0										1000	
2.0 - 2.9											0.00
3.0 - 3.0				223	53	32	11		415	1000	3.63
4.0 . 4.9			•••	•••	•••		••		•		0.00
5.0 - 5.4				11	21	11			43		4.50
				•••	••	••		11	ii		7.50
7.0 - 7.9			11	11	11			•••	32	112	3.50
8.0 - 6.4			• •	• •	11				ii	500	4.50
					• • •	11			ii		5.50
10.0 -10.0									•••		0.00
11.0 -11.9											0.00
12.0 -12.0				21	11		11		43		4.50
13.0 -13.9					•						0.00
14.0 -14.9			74	43	74				191		3.50
15.0 -15.0										245	0.00
10.0 -10.9					74				202	245	3,55
17.0 -17.0										43	0.00
18.0 -18.9										43	0.00
19.0 -19.9										43	0.00
20.0 -20.0			25	11					43	43	2.75
21.0 +											0.00
TOTAL			277	303	522	53	51	11			3.69
CUM. TOTAL	1000	1000	1000	723		65	35	11			
COL. AVG.	0.000	0.00	11,50	0.03	11.05	5.10		4.50	•.70		
AVERAGE SIG.	HE 1 GHT	. 1.4					MAVE	PERIOD		A7 SEC	•

AVERACE SIG. MEIGHT = 3.08 FT VARIANCE OF SIG. MEIGHT = 1.00 FT SO STANDARD DEVIATION OF MEIGHT = 1.02 FT STANDARD DEVIATION OF MEIGHT = 1.02 FT STANDARD DEVIATION OF PERIOD = 5.18 SEC

PERULTS COTAINED FOR 1024-BECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 4) wave case located at 3 ml se of port Mugneme.

• Calms are omitted.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

132 0886	RVATION	•		SUMMARY	FOR A	PR 73	APR 74	1			
PERIOD (SECS)				81G.	HEIGH	T (FT)					
	0-1	1-2	203	3-4	4-5	1-6	607	7-8	101.0	CUM .	ROW AVG.
0.09			•••			,,,,	•••	,			0.00
1.0 - 1.9											0.00
2.0 - 2.9											0.00
3.0 - 3.9			144	61	15				220		2.91
4.0 - 4.9				15					30		4.50
5.0 - 5.9				53	45	53		23	121		5.19
6.0 - 6.9					30	38	30	53	129		5.74
7.0 - 7.9				8		23		8	45		5.67
8.0 - 8.9				8		•			15		4.50
0.0 - 9.9									•		0.00
0.0 -10.9											2.50
1.0 -11.9										432	0.00
9.51. 0.5			15	30					53	432	3.36
.0 -13.9										379	0.00
1.0 -14.9			106	68	15				197	379	3.15
1.0 -15.9										182	0.00
.0 -16.9			76	76	53				174	102	3.20
7.0 -17.9											0.00
8.0 -18.9											0.00
0.0 -19.9											0.00
0.0 -20.9									•		3.50
1.0 +											0.00
DTAL			346	303	144	•1	61	53			3.07
UM. TOTAL	1000		1000	652	340	502	114	53	-		
OL. AVG.	0.000	0.00	10.55	11.05	0.50	6,67	7.25	.21	9.51		
VERAGE SIG.						ARIANC					

STANDARD DEVIATION OF HEIGHT . 1.34 PT STANDARD DEVIATION OF PERTOD . 5.24 SEC.

AVERAGE SIG. HEIGHT # 3.33 FT

VARIANCE OF SIG. HEIGHT # 1.25 FT SG

STANDARD DEVIATION OF HEIGHT # 1.12 FT

AVERAGE HAVE PERIOD # 10.42 SEC*

VARIANCE OF WAVE PERIOD # 30.06 SEC SO*

STANDARD DEVIATION OF PERIOD # 5.48 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN HITH A PRESSURE (NO. A)
HAVE GAGE LOCATED AT 3 HI SE OF PORT MUENERE.

CALMS ARE OMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

187 OBSE	RVATION	•	,	SUMMAR	FOR	JUN 73	JUN 7	ž.			
(SECS)				310	. HEIG	HT (FT)					
				- 1						CUM.	
	0-1	1-2	5.3	3.4	4.5	5.0	6-7	7.8	TOT. *		
.09											0.00
.0 - 1.9											0.00
9.5 - 0.5											0.00
.0 - 3.9			150	115	21	27	5		294		3.37
.0 - 4.9				5					5		3,50
.0 - 5.9			5	11	16				35		3.83
.0 - 6.9			11 5 5	11	11	11			43		4.00
.0 . 7.9			5				5	5	16		5.50
.0 - 8.9			5		5				11		3.50
.0 . 9.9				5					9	599	3.50
.0 -10.9			5	16					21	594	3.25
.0 -41.9				•						372	0.00
.0 -12.9			59	37	21				116	572	3.16
.0 -13.9				•							0.00
.0 -14.9			155	70	27				251		2.49
.0 -15.9				, ,	-						0.00
.0 -16.9			86	86	27	5			203		3.26
TAL			460	353	128	43	11	5			3.31
M. TOTAL	1000	1000	1000	540	187						
L. AVG.			11,00				5.50	7.50	10.46		
ERAGE SIG.	HEIGHT !	. 3.	28 FT			AVERAGE	HAVE	PERIOD	. 10.	23 850	
RIANCE OF S	IG. HEI	GHT .		FT 80)						. SEC 8
ANDARD DEVI						STANDAR					

BEST AVAILABLE COPY

149 DESERVATIONS SUMMARY FOR JUL 73 JUL 74 PERIOD (SECS) SIG. HEIGHT (FT)

								Cum.	ROW	
	0-1	1-5	5-2	3-4	4.5	5-6	TOT		AAC.	
1.00								1000	0.00	
1.0 - 1.0								1000		
2.0 6 2.0								1000	0.00	
3.0 - 3.9			120	47	7		161	1000	2.83	
4.0 - 4.9			7	47			13	819	3.00	
5.0 - 5.0				27			47	805	3.43	
4.0 - 4.4			7	7	7	7	27		4.00	
7.0 - 7.9							-	732	0.00	
4.0 - 4.9			11	1			20	732	2.83	
			20				20	711	2.50	
10.0 -10.9			11 20 13				13		2.50	
11.0 -11.9			•				•	478		
12.0 -12.0			87	20			107	678	2.69	
13.0 -13.9								370	0.00	
14.0 -14.4			114	161			275	570	3.09	
15.0 -15.0			-	•				295	0.00	
16.0 -16.9			67	154	47		268	295	3.43	
17.0 -17.9								21	0.00	
18.0 -18.9								21	0.00	
19.0 -19.9									0.00	
20.0 -20.9			13	13			21	21	3.00	
21.0.+			•	•			_			
TOTAL			470	443	81	7			3.12	
CUM. TOTAL	1000	1000		530	87	7				
COL. AVG.				13,21	11.03	6,50	11.94			

AVERAGE SIG. MEIGHT # 3.00 PT AVERAGE HAVE PERIOD # 11.79 SECTION OF SIG. MEIGHT # .53 FT SQ STANDARD DEVIATION OF HEIGHT # .63 FT STANDARD DEVIATION OF PERIOD # 3.23 SECTION OF PERIOD # 3.23 SECT

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (MD. 6) WAVE GAGE LOCATED AT 3 MI SE OF PORT MUENEME.

CALMS ARE OMITTED.

Results may have been over-compensated such that significent heights are up to 20% too high and wave periods tend to be too short.

164 OBSERVATIONS SUMMARY FOR AUG 73 AUG 74

PERIOD			sic.	HEIGH	T (FT)				
(9608)									
	0=1 1=2	2-3	3-4	4-5	5=6	6-7	101.	CUM.	ROW AVG. *
0.09		•	-					1000	0.00
1.0 - 1.9								1000	0.00
2.0 . 2.9								1000	0.00
3.0 - 3.9		85	91	24	6	6	213	1000	3.36
4.0 - 4.9			18	- 6			24	787	3.75
5.0 - 5.9		6	30	24		6	67	762	4.05
6.0 - 6.9			12	12			24	695	4.00
7.0 - 7.9			18	• •			10	671	3.50
8.0 - 8.9			18				12	652	3.50
9.0 - 9.9		12					12	640	2.50
10.0 -10.9		18	24	6			49	628	3.25
11.0 -11.9			•					579	0.00
12.0 -12.9	6	67	30	12			110	579	
13.0 -13.9				•				463	0.00
14.0 -14.9		177	110				293		2.92
15.0 -15.9								171	0.00
16.0 -16.9	6	55	79	10			159	171	3.19
17.0 -17.9				•				12	0.00
18.0 -18.9								12	0.00
19.0 -19.9								15	0.00
20.0 -20.9			12				12	18	3,50
21.0 +									0.00
TOTAL	18	421	439	110	6	15			3.21
CUM. TOTAL	1000 1000	988	567	128	18	12			
COL. AVG.	0.00+14.50			0.50	3,50	4.50	10.81		

AVERAGE SIG. HEIGHT = 3.19 FT AVERAGE HAVE PERIOD = 10.63.8EG*
VARIANCE OF SIG. HEIGHT = .56 FT SG VARIANCE OF WAVE PERIOD = 26.13 SEC SO*
STANDARD DEVIATION OF MEIGHT = .75 FT STANDARD DEVIATION OF PERIOD = 5.11 SEC

86 DESERVATIONS SUMMARY FOR SEP 73 PERIOD (SECS) SIG. HEIGHT (FT) TOT . AVG. . 2-3 5-6 707.* 4-5 0.0 - .9
1.0 - 1.9
2.0 - 2.9
3.0 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
9.0 - 9.9
10.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 15.9
16.0 - 16.9
17.0 - 17.9
18.0 - 17.9
19.0 - 19.9
20.0 - 20.9
21.0 + TOTAL
CQL. AVG. 1000 0.00 1000 0.00 1000 3.36 744 0.00 744 5.50 721 0.00 698 0.00 698 3.50 674 2.50 651 0.00 651 0.00 651 0.00 651 0.00 651 0.00 651 0.00 651 0.00 651 0.00 651 0.00 81 128 47 256 12 52 12 12 12 12 23 53 53 140 140 279 155 12 12 3,29 360 512 1000 1000 1000 640 0.00* 0.00 12,34 12.61 105 128 9.17

AVERAGE SIG. HEIGHT = 3.29 FT AVERAGE HAVE PERIOD = 11.83 SEC PARIANCE OF SIG. HEIGHT = .47 FT SG AVERAGE HAVE PERIOD = 31.43 SEC SQ STANDARD DEVIATION OF MEIGHT = .68 FT STANDARD DEVIATION OF PERIOD = 5.61 SEC

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN KITH A PRESSURE (NO. 4)

HAVE GAGE LOCATED AT 3 MI SE OF PORT HUENEME.

CALMS ARE DMITTED.

Results may have been over-compensated such that significant heights are up to 20% too high and wave periods tend to be too short.

	78	0	BBERVATIONS			SUMMARY	FOR 00	T 73			
	RIO					816.	HEIGHT	(FT)			
										CUM.	ROW
			0-1	1-2	5.2	3-4	4-5	506	TOT. *	TOT.	AVG.
0.0		. 9								1000	0.00
1.0	. 1	. 9								1000	0.00
5.0	. 5	. 9								1000	0.00
3.0	. 3	. 9			154	56			179	1000	
4.0	. 4	. 9							13	821	3.50
5.0	. 5	. 9				13	56		38		4.17
6.0	. 6	. 9				•-	13	26	36		5.17
7.0	. 7	. 9					••	-			0.00
8.0		. 9								731	0.00
9.0	. 9	. 9								731	0.00
0.0	-10	. 9								731	0.00
	-11									731	
2.0	-12	. 9			18	13			51	731	
3.0	-13				-	• •			٠.		0.00
4.0				13	192	128			333		2.85
5.0									,,,		0.00
6.0					167	179			346		3.02
OTAL				13	551	372	38	26	340		3.01
UM.		AL	1000 1	000	987	436	64	56			
OL,			0,00+14					.50	12.33		

AVERAGE SIG. HEIGHT = 2.98 PT AVERAGE HAVE PERIOD = 12.18 SEC*
VARIANCE OF SIG. HEIGHT = .67 FT SQ VARIANCE OF HAVE PERIOD = 26.69 SEC SQ*
STANDARD DEVIATION OF PERIOD = 5.17 SEC*

BEST AVAILABLE COPY

PER100 (BECS)				816.	HEID	7 (FT)					

	4-1	102	1.3	3-4	4.5	9.0	7	7.5	101.	101.	
0.0											0.00
1.0 . 1.9										1000	0.00
2.0 . 2.9										1000	0.00
3.0 . 3.9		,	210	136	1.	10		•	300	1000	3.00
				15	1;		,		5.0	.15	4.30
5.0 - 5.4				29	2.				50	567	4.00
			15	3	15	,	10	,	53	929	4.59
7.0 . 7.4			10	3					15	476	2.83
8.0 . 8.9			10	13	,				1,	461	3,33
9.0 . 9.9			•		;				,	432	4.50
10.0 -10.9			10	3					15	427	2.63
11.0 -11.9										413	0.00
12.0 -12.9		,	29						34	413	2.30
13.0 -13.0		•								379	0.00
14.0 -14.9			.7	83	24				190	379	3.10
15.0 -15.9				٠,	•					184	0.00
10.0 -10.9			58	03	1.	•		,	170		3,44
17.0 -17.9			,,,	• 3	, ,			,		19	
											0.00
16.0 -18.9										19	
19.0 -19.9									19		4.17
50.0 -50.4				5	10				1,2		0.00
\$1.0 +		0.0									3,38
TOTAL		10	432	379	131	1.	15	15			****
CUM. TOTAL	1000	1000	••0	958	100	• • •	. 2.	15			
COL. AVG.	0.000	8.00	0.50	9.51		7.50	3.43	8.83	.01		

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A PRESSURE (NO. 8) WAYE GAGE LOCATED AT 3 MI SE OF PORT MUCHTME.

• CALMS ARE OMITTED.

Results may have been over-compensated such that significent heights are up to 20% too high and wave periods tend to be too short.

45 6936	RVATION			BUHFARY	FOR	DEC 74							
(8608)				sic.	me te	NT (FT)							
		71.14										CU4.	
	0-1	1-5	5-3	3.4	4.5	5.6	6.7	7.8		4-10	101.	101.0	
0.0												1000	
1.0 . 1.0												1000	
3.0 - 3.0		11	43	33			11						0.00
4.0 - 4.9			•,	,,	55	11	11				130		3.58
5.0 - 5.4				11			11				22		5.00
					11	11	••				55		5.00
7.0 - 7.4				22	::	22	11		11		76		5.30
8.0 . 8.0			11	22	11	••	••				54		3.70
				11	••						11		3,50
0.0 -10.0		11	11	22									2.75
1.0 -11.0			• • •								•		0.00
2.0 -12.0			11	11							22		3.00
3.0 -13.0											•		0.00
4.0 -14.9		11	43	87	5		22		11		534		4.00
5.0 -15.0													0.00
6.0 -16.9			135		7					11	346	380	3.50
7.0 -17.0										100		33	0.00
8.0 -18.9												33	0.00
14.4													0.00
0.0 -20.4				33							3	, ,,	3,51
1.0 .					-								
OTAL		33	272	340	217	43	54	1200	55	11			3.00
U". TOTAL	1000	1000			346	130		33	33	11			
OL. AVG.	0.000	4.50	13.30	13.03	12.65	4.25	₹.10	0.00	11.00	10.50	15.40		
APIANCE OF S	16 951	Cut "				VERAGE		-F-100	12.	35 86			
TANDARD DEVI						TANDAR		AAE LE	-160	25.0	1 96 6		

1579 085E	RVATION	8	5	UMMARY	FOR 1	8 MONTH	S APR	73 THRO	UGH DEC	74			
PERIOD (SECS)				816.	HEIGH	(FT)							
		1-2	2-3	3-4	4-5	5.6	4-7	7-8		9-10	*n* *	CUM. TOT	ROW
0.09	0-1	1.5	2.3	,	4.5	3.0	9-7	/•0		4-10	101.0	1000	
1.0 - 1.9													0.00
2.0 - 2.9													0.0
3.0 - 3.9		2	144	94	18	9	3	1			270	1000	
4.0 - 4.9			1	•	3		1				14		3.8
5.0 - 5.9			3	21	50	4	3	3	1		54		
6.0 - 6.9			6	6	10	11	5	3	1		44		4.9
7.0 - 7.9 8.0 - 8.9					5	4	,	3	1		21		3.9
9.0 - 9.9			i	11	1	:	1	1	1		23		3.6
0.0 -10.9		1			i	•	•				17		2.9
1.0 -11.9		•									• .		0.0
2.0 -12.9		3	44	20	5		1				73		2.9
3.0 -13.9													0.0
4.0 -14.9		3	119	93	27	5	2		1		246		3.1
5.0 -15.9													0.0
6.0 -16.9		5	86	96	5.6	3		1		1	217		3.5
7.0 -17.9												14	
8.0 -18.9 9.0 -19.9												14	0.0
0.0 -20.9			3	9	2						14		3.4
1.0 +			•		•								0.0
OTAL		9	426	372	123	35	19	11	3	1			3.3
UM. TOTAL	1000	1000	991	565	193	69	34	15	4	1			
OL. AVG.	0.00	11.90	10.59	11.04	10.60	7.03	6.93	7.00	8.50	16.50	10.53		
VERAGE SIG.						VERAGE							
ARIANCE OF S			1.10	FT 80	. v	ARTANCE	OF M	AVE PE	KIOD =	30.6	7 SEC		
TANDARD DEVI	ATION O	PEI	, - 1 =	1.05 F	5	TANDARI	DEVI	ALION	UP PER	100	5.54	956	
ESULTS DETAT	NED FRO	M 102	-SECON	n DIGI	TAL RE	nens '	AKEN	WITH 4	PRESS	URF IN	0. 41		
MAVE GAG											,		
CALMS ARE				-									

NOTE: Results may have been overcompensated such that significant heights are up to 20 percent too high and wave periods tend to be too short.


Table A-62. CERC wave gage history for Venice Fishing Pier, Venice, California.

1					
-			Pier Length (feet)		
			Distance from seaward end of pier		
	: : :	ce, California	Water Depth (ft MSL)		
0		LUCALITUM: Venice Fishing rier, Venice, Camornia	Gage Range (ft MSL)		
		Venice Fis	Gage Length (feet)		
9.0	. MOTATION.	LUCALIUM:	Explanation	2 Apr. 1969 Switched completely to telemetering recorder at Los Angeles District Office.	
	3	·	End of Proper Operation	2 Apr. 1969	
	74	97 N., 118 28	Beginning of Proper Operation	11 Oct. 1968	
	CETE: Form 174-74 18 Mar 74	COURDINAIES: 33	Type of Gage		

Table A-63. Number of analyzed pen and ink records from Venice, California.

MO YR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ОСТ	VDN	DEC	твт
1966	119	135	143	175	88	164	176	184	176	38	180	171	1749

 $^{^{1}\}mathrm{From}$ 7-minute records taken six times daily and analyzed by the CERC method.

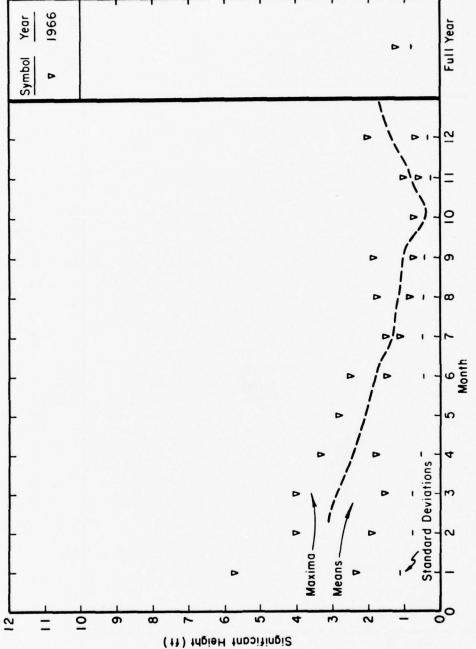

Maxima, means, and standard deviations of significant height from Venice, California. Determined from 7-minute pen and ink records taken six times daily. Wave heights may be low due to old gage design and maintenance difficulties. Figure A-98.

10 m 10 m 10 m 10 m

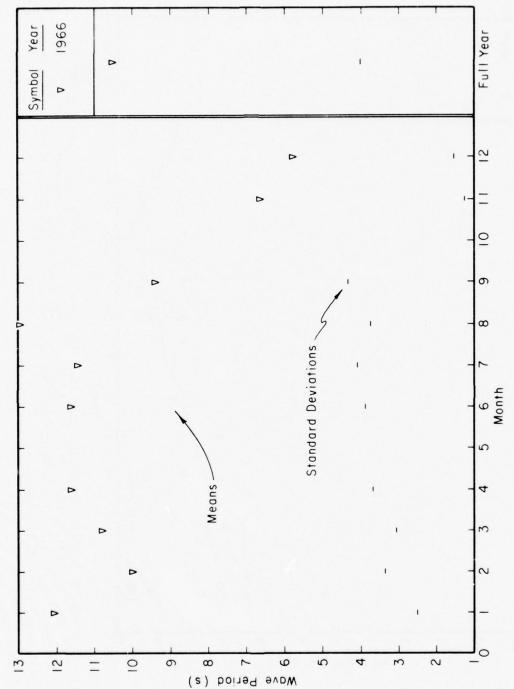


Figure A-99. Means and standard deviations of wave periods for Venice, California; determined from 7-minute pen and ink records taken six times daily.

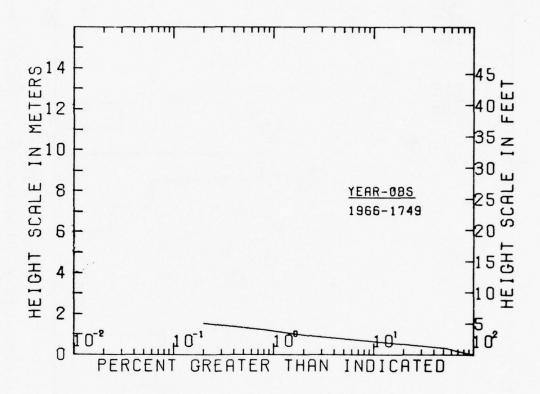
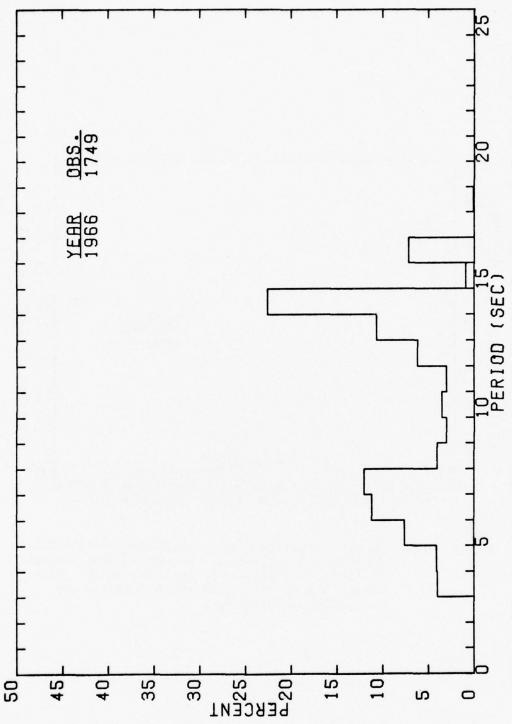


Figure A-100. Annual cumulative significant height distribution from Venice, California. Determined from 7-minute pen and ink records taken six times daily. Wave heights may be low due to old gage design and maintenance difficulties.



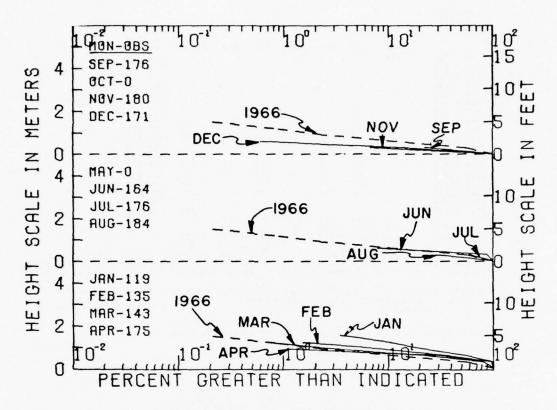


Figure A-102. Seasonal summaries of cumulative significant height distributions from Venice, California. Determined from 7-minute pen and ink records taken six times daily. Wave heights may be low due to old gage design and maintenance difficulties.

Table A-64. Wave climate for Venice, California.

Distribution of significant height versus period (in observations per 1,000 observations).

119 0838	RVATIONS		SUMMAR	Y FOR	JAN 66			
PERIOD			HEI	GHT (F	7)			
(SECS)								
							CUM.	RO-
	0-1 1-2	5.3	3-4	4-5	5-6	TOT	101.	AVG
.0 - 1.9	25						1000	.00
2.0 - 2.4							1000	.00
2,5 . 2,9							1000	.00
3.0 - 3.4							1000	.00
3,5 - 3,9							1000	.00
4.0 - 4.9							1000	.00
5.0 - 5.9	25					26	1000	
6.0 - 6.9	17					17	974	1.50
7.0 - 7.9	34	8	8			52	957	2.00
8.0 - 8.9	17	8	17	8		52	905	2.83
9.0 - 9.9	8	17	17	8 8		52	853	3.00
10.0 -10.9	25	25	34			95		2.77
11.0 -11.9	50	8	8	17	17	103	707	2.92
12.0 -12.9	59	50	25	17	8	164	603	2.66
13.0 -13.9	109	50				164	440	1.82
14.0 -14.9	92	134		8	8	250	276	2.29
15.0 -15.9							26	.00
16.0 -16.9	8	17				26	26	2.17
TOTAL	25 445	319	109	67	34			2,35
CUM. TOTAL	1000 975	529	210	101	34			
COL. AVG.	.00 + 11 . 80	13.13	10,35	11.37	12.50	12.07		

AVERAGE SIG. MEIGHT = 2.35 FT

VARIANCE OF SIG. MEIGHT = 1.20 FT SQ

STANDARD DEVIATION OF MEIGHT = 1.10 FT

AVERAGE HAVE PERIOD = 12.07 SEC=

VARIANCE OF MAVE PERIOD = 6.35 SEC= 80=

STANDARD DEVIATION OF PERIOD = 2.52 SEC=

REBULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT VENICE FISHING PIER

• CALMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

135 0886	RVATION	8		SUMMAR	Y FOR F	£8 66		
PERIOD				HEI	GHT (PT)		
(8EC8)								
							CUM.	RO4
	0-1	1.5	5-3	3-4	4-5	TOT.*	101.	AVG
.0 - 1.9							1000	.00
2.0 = 2.4							1000	.00
2.5 - 2.9							1000	.00
3.0 - 3.4		7				7	1000	1.50
3.5 - 3.9	7	5.5				30	995	1.25
4.0 - 4.9		55				55	963	1.50
5.0 + 5.9		52				52	941	1.50
6.0 - 6.9		52	30			81	889	1.86
7.0 - 7.9		111	44			156	807	1.79
8.0 . 8.9	7	52	37	7		104	652	1.93
9.0 - 9.9	15	52	55			89	548	1.58
10.0 -10.9	7	15	44	,		74		05.5
11.0 -11.9		5.5	15	7		44		2.17
12.0 -12.9		74	7	7		89		1.75
13.0 -13.9		2.5	55	15	7	67		2.61
14.0 -14.9		96	30	55	7	156	185	2.12
15.0 -15.9							30	.00
16.0 -16.9		30				30	30	1.50
TOTAL	37	630	252	67	15	•		1.89
CUM. TOTAL	1000	963	333	81	15			1,00
COL. AVG.	6.35*	9.72		12.61	14.00	9.99		

AVERAGE SIG, HEIGHT = 1.89 FT AVERAGE WAVE PERIOD = 9.99 SEC STANDARD DEVIATION OF HEIGHT = .73 FT STANDARD DEVIATION OF PERIOD = 3.37 SEC

AVERAGE SIG. MEIGHT # 1.52 FT AVERAGE WAVE PERIOD # 10.77 SECP VARIANCE OF SIG. MEIGHT # .55 FT SG VARIANCE OF WAVE PERIOD # 9.64 SEC SOP STANDARD DEVIATION OF PERIOD # 3.10 SECP

RESULTS OBTAINED FROM 7 MINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT VENICE PISHING PIER CALMS ARE OMITTED.

175 OBSERVAT	1048	8	UMMARY P	OR APR	66	
PERIOD (SECS)			HEIGH	(FT)		
					CUM.	ROP
0	-1 1-2	5.3	3-4	TOT	101.	AVG
.0 - 1.9					1000	.00
2.0 - 2.4					1000	.00
2.5 . 2.9					1000	.00
3.0 - 3.4					1000	
3.5 - 3.9	29			54		1.50
4.0 - 4.9	17	11		24	971	1.90
5.0 - 5.9	34	34		69		2.00
6.0 - 6.9	6 29			40		1.50
7.0 - 7.9	6 34			86		1.97
8.0 - 8.9	17			17		1.50
9.0 • 9.9	34	6		40		1.64
10.0 -10.9	34			46		1.75
11.0 -11.9	17			17		1.50
12.0 -12.9	6 63	23		91		1.69
13.0 -13.9	6 114	11		131		1.54
14.0 -14.9	29 189	109	6	331		1.78
15.0 -15.9	11			17		1.63
16.0 -16.9	34		6	57	57	2.00
TOTAL	51 657		11			1.75
CUM. TOTAL 10			11			
COL. AVG. 12.	50-11.64	11.36	15.50	11.65		
AVERAGE SIG. HETG	HT . 1.	75 FT		AVE	RAGE .	MAVE PERIOD . 11.65 SEC.
VARIANCE OF SIG.	HEIGHT .	.31	FT 90	VAR	IANCE	OF MAVE PERIOD . 13.00 SEC 300
STANDARD DEVIATIO	N OF HEI	GHT .	.56 FT			DEVIATION OF PERIOD . 3.69 SEC.

Wave heights may be low due to old gage design and maintenance difficulties.

Insufficient data for May.

```
164 OBSERVATIONS
                                                                                                              SUMMARY FOR JUN 66
           PERIOD
(SECS)
                                                                                                                         HEIGHT (FT)
                                                        CUM. MOM
0-1 1-2 2-3 TOT.* TOT. AVG.*
1000 .00
0 = 1.9
2.0 = 2.4
3.0 = 3.4
3.5 = 3.9
4.0 = 4.9
5.0 = 5.9
6.0 = 6.9
7.0 = 7.9
6.0 = 11.9
11.0 = 11.9
12.0 = 12.9
13.0 = 11.9
14.0 = 14.9
15.0 = 15.9
TOTAL
CUM. TOTAL
CUM. TOTAL
CUL. AVG.
                                                                                                                                               1000 .00

1000 .00

1000 .00

1000 1.50

994 1.30

902 1.36

817 1.19

720 1.12

671 1.50

634 1.17

616 1.17

7579 1.25

555 1.55

439 1.96

128 1.64

1.45
                                                                                 24
55
73
67
30
37
12
24
16
98
                                                            6 12 6 6 12 6 6 18
                                                                                                                                  61
85
98
49
37
                                                                                                                               18
37
24
116
                                                                                                                                311
                                                 12 85 30
134 787 79
1000 866 79
10.09*11.56 15.12
                                                                                                                               128
                                                                                                                       11,65
AVERAGE SIG. HEIGHT # 1.45 PT
VARIANCE OF SIG. HEIGHT # .21 FT SQ
STANDARD DEVIATION OF HEIGHT # .46 FT
                                                                                                                                                      AVERAGE WAVE PERIOD # 11.65 SEC*
VARIANCE OF WAVE PERIOD # 14.82 SEC SQ*
STANDARD DEVIATION OF PERIOD # 3.85 SEC*
                                                                                                              .46 FT
                                                                                                              SUMMARY FOR JUL 66
                 176 DRSERVATIONS
           PERTOD
                                                                                                                        HEIGHT (PT)
           (SECS)
                                                                                                                      TOT. AVG.
                                                        0 • 1
5 1
                                                                                                 TOT.*
                                                                                                                          1000 .00
1000 .00
1000 .50
994 1.17
976 1.36
934 .81
638 1.00
6754 .95
669 .50
671 .63
635 1.30
605 .50
599 1.00
479 1.25
126 1.36
64 1.43
0 - 1.9
2.0 - 2.4
3.0 - 3.4
3.5 - 3.9
4.0 - 4.9
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
8.0 - 8.9
10.0 - 10.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 16.9
TOTAL
CUM. TOTAL
CUL. AVG.
                                                            6 62 40 34 17 23 6
                                                                                 11
34
28
40
28
                                                                                                             42
                                                                                                             66
18
36
30
                                                                                 11
```

11 11 45 45 65 250 6 34 6 74 409 591 1000 591 AVERAGE SIG. MEIGHT = 1.09 FT VARIANCE OF SIG. MEIGHT = .24 FT BQ STANDARD DEVIATION OF MEIGHT = .49 FT AVERAGE WAVE PERIOD # 11.47 SEC*
VARIANCE UF WAVE PERIOD # 16.83 SEC 80*
STANDARD DEVIATION OF PERIOD # #.10 SEC*

RESULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT VENICE FISHING PIER TOLMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.

353 42

11.47

```
HEIGHT (FT)
         PERIOD
         (SECS)
                                                                                      TOT.* TOT.* AVG.*
1000 .00
1000 .00
0 - 1.9
2.0 - 2.4
3.0 - 3.4
3.5 - 3.9
4.0 - 4.0
5.0 - 5.9
6.0 - 6.9
7.0 - 7.9
8.0 - 11.9
11.0 - 11.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 16.9
TOTAL
COL. AVG.
                                                  201
                                                                                                            1000 001
1000 000
1000 50
980 50
959 117
918 90
884 50
887 100
887 50
886 50
886 50
887 50
886 50
887 50
887 50
887 50
887 50
887 50
                                                                                                20 41 34 27 14 7
                                                                        22
11
5
                                                     11
                                                     16
                                            16
33
54 11
71 11
190 103
5
60 114
717 283
1000 283
12.50*13.79
                                                                                             20
41
82
102
367
7
AVERAGE SIG. HEIGHT # .78 FT
VARIANCE OF SIG. HEIGHT # .20 FT SQ
STANDARD DEVIATION OF HEIGHT # .45 FT
                                                                                                                                      AVERAGE WAVE PERIOD # 12.96 SEC*
VARIANCE OF WAVE PERIOD # 14.05 SEC 80*
STANDARD DEVIATION OF PERIOD # 3.75 SEC*
                 176 OBSERVATIONS
                                                                                                  SUMMARY FOR SEP 66
          PERIOD
(SECS)
                                                                                                           HEIGHT (FT)
                                                                                                         TOT. * AVG. *
                                                                       1=2
                                                                                       TO1.*
                                                    233
 0 - 1.9
2.0 - 2.4
3.0 - 3.4
3.5 - 5.9
4.0 - 6.9
5.0 - 5.9
6.0 - 6.9
1.0 - 11.9
12.0 - 12.9
12.0 - 12.9
13.0 - 13.9
14.0 - 14.9
15.0 - 15.9
17.0 - 17.9
18.0 - 18.9
17.0 - 17.9
                                                                                                                             .00
                                                                                                             1000
                                                                                                            1000 .00

1000 .63

978 1 .00

963 .50

919 .50

778 .74

563 1.15

370 1.00

356 .00

356 .00

356 .50

341 .50

341 .50

341 .50

7 .72
                                                                                                              1000
                                                                                                22
15
44
                                                    6
34
108
125
51
                                                                                             141
215
193
15
                                                                        40
97
                                                                                             15
7
30
170
15
                                                                        17
                                                   114
                                                                          40
                                                                  6
222
223
4,73
                                                                                                   7
                                                 778
1000
9.27*
  COL. AVG.
 AVERAGE SIG. MEIGHT # .72 FT
VARIANCE OF SIG. MEIGHT # .17 FT SQ
STANDARD DEVIATION OF MEIGHT # .42 FT
                                                                                                                                        AVERAGE WAVE PERIOD = 9,40 SEC*
VARIANCE OF WAVE PERIOD = 18,87 SEC SQ*
STANDARD DEVIATION OF PERIOD = 4,34 SEC*
 REBULTS OBTAINED FROM TOMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE WAVE GAGE LOCATED AT VENICE FISHING PIER CALMS ARE OMITTED.
```

SUMMARY FOR AUG 66

184 OBSERVATIONS

Wave heights may be low due to old gage design and maintenance difficulties.

Insufficient data for October.

	180	088ER	VATION		30	MMAHY	POR NOV	•
P	RIO)				HEIGH	T (FT)	
(8	ECS							
						CUM.	ROM	
			0-1	1.2	*01.*	101.	AVG	
. 0	- 1.	9	400			1000	.00	
2.0	. 5	4				1000		
2.5	. 2.	9				1000	.00	
3.0	. 3.	4	17	6	37	1000	.75	
	. 3		17		28	963	.50	
4.0	. 4.	9	33		56	935	.50	
5.0	. 5	9	61		102	880	.50	
6.0	. 6.	9	194	17	352	778	.58	
7.0	. 7	9	172	58	333	426	.64	
8.0	. 8	9	33	17	83	93	. 63	
9.0	. 9	9	6		9	•	.50	
TOTAL			933	67			. 37	
CUM.	TOT	L	1000	67			• • •	
COL.			6,55*	7.15	6.62			

AVERAGE SIG. HEIGHT # .57 FT

VARIANCE OF SIG. HEIGHT # .06 FT SQ

STANDARD DEVIATION OF HEIGHT # .25 FT

AVERAGE WAVE PERIOD # 6.62 SEC+

VARIANCE OF WAVE PERIOD # 1.66 SEC SO+

STANDARD DEVIATION OF PERIOD # 1.29 SEC+

RESULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN HITH A STEP RESISTANCE WAVE GAGE LOCATED AT VENICE FISHING PIER

* CALMS ARE OMITTED.

171 OBSE	RVATIONS	•	8	UMMARY	FOR DE	C 66
PERIOD				HEIGH	T (FT)	
(SECS)						
					CUM.	ROM
	0-1	1.5	2.3	TOT.*	TOT.	AVG, *
.0 . 1.9	316				1000	.00
2.0 - 2.4					1000	.00
2.5 . 2.9					1000	.00
5.0 - 3.4	41	18	6	94	1000	.95
3.5 . 3.9	53	18		103	906	.75
4.0 - 4.9	58	35		137	803	.88
5.0 - 5.9	94	15		154	667	.61
6.0 - 6.9	164	12		256	513	.57
7.0 . 7.9	123	53		214	256	.66
8.0 . 8.9	12	12		34	43	1.00
9.0 . 9.9	6			9	9	.50
TOTAL	865	129	6			.64
CUM. TOTAL	1000	135	6			•
COL. AVG.	5.91*		1,25	5.79		

AVERAGE SIG. HEIGHT # .64 FT AVERAGE WAVE PERIOD # 5.79 SEC# VARIANCE OF SIG. HEIGHT # .15 FT SQ VARIANCE OF WAVE PERIOD # 2.40 SEC \$00 STANDARD DEVIATION OF HEIGHT # .36 FT STANDARD DEVIATION OF PERIOD # 1.55 SEC#

1623 085	BERVATIONS		SUMMARY	FOR 1	0 MONTHS	JAN 66	THROUGH	DEC 66
PERIOD			HE 1 G	HT (FT)			
(8608)								
							CUM.	ROP
	0-1 1-	5 5.3	3-4	4.5	5-6	101.	TOT	AVG
.0 - 1.9	140						1000	.00
2.0 - 2.4							1000	.00
2.5 - 2.9							1000	.00
3.0 . 3.4		4 1				16	1000	. 85
3.5 . 3.9		0				24	984	.97
4.0 - 4.9		7 2				41	959	1.10
5.0 4 5.9		5 5	1			79		1.04
6.0 - 6.9	62 3		1			115	840	.90
7.0 - 7.9	46 4	7 10	1	1		155	727	1.19
8.0 - 8.9		7 4	5	1		42	605	1.43
9.0 - 9.9	6 1	7 4	1	1		35	563	1.59
10.0 -10.9		6 7	3	1		38	531	1.76
11.0 -11.9		5 2	1	1	1	33	493	1.67
12.0 -12.9	10 2	8 10	5	1	1	60	460	1.71
13.0 -13.9	17 4	8 14	1	1		95	400	1.52
14.0 -14.9	50 10	7 31	2	1	1	552	305	1.46
15.0 -15.9	5	5 1				•	8.2	1.27
16.0 -16.9	14 4	1 6	1			72		1.39
17.0 -17.9							1	.00
18.0 -18.9		1				1	1	1.50
TOTAL	449 42		17	7	5			1.21
CUM. TOTAL	1000 55		26	9	2			# (# (# (# (# (# (# (# (# (# (# (# (# (#
COL. AVG.	8.97*11.1		11.06	11.50	12,50	10.46		

AVERAGE SIG. HEIGHT = 1.21 FT AVERAGE WAVE PERIOD = 10.45 SEC+ VARIANCE OF SIG. HEIGHT = .63 FT 80 VARIANCE OF WAVE PERIOD = 16.10 SEC 80+ STANDARD DEVIATION OF HEIGHT = .80 FT STANDARD DEVIATION OF PERIOD = 4.01 SEC+

REBULTS OBTAINED FROM THMINUTE PEN AND INK RECORDS TAKEN WITH A STEP RESISTANCE HAVE GAGE LOCATED AT VENICE FISHING PIER

CALMS ARE OMITTED.

Wave heights may be low due to old gage design and maintenance difficulties.


Table A-65. CERC wave gage history for Huntington Beach Fishing Pier, Huntington Beach, California.

		rnia	Pier Length (feet)	1,500	1,500			1,500		1,500	
		LOCATION: Huntington Beach Fishing Pier, Huntington Beach, California	Distance from seaward end of pier	0	0			0		0	
		g Pier, Hunti	Water Depth (ft MSL)	26	26					30	
		n Beach Fishin	Gage Range (ft MSL)							-13 to +12	
0		Huntingto	Gage Length (feet)	24	25			25		25	
0		LOCATION:	Explanation		8 Sept.1949 19 Nov. 1953 Gage out of order; marine growth.		20 June 1958 28 May 1969 New gage installed.		28 May 1970 12 Mar. 1971 Gage removed.	Gage discontinued.	
		W.	End of Proper Operation	14 July 1949	19 Nov. 1953	7 Feb. 1955 24 Apr. 1958	28 May 1969	24 Feb. 1970	12 Mar. 1971	17 Sept.1975	
	7.7	39' N., 118°00'	Beginning of Proper Operation	28 May 1948		7 Feb. 1955	20 June 1958	19 July 1969 24 Feb. 1970	28 May 1970	13 Oct. 1971	
	CEUS Form 174-74 18 :tar 74	COORDINATES: 33°39' N., 118°00' W.	Type of Gage	Step-resistance (SR), 28 May 1948 14 July 1949 staff-spark plug type	SR staff-parallel type			SR staff-relay type		Continuous-wire staff 13 Oct. 1971 17 Sept.1975 Gage discontinued.	

Table A-66. Number of analyzed records from Huntington Beach, California. 1

YR TR	JAN	FEB	HAR	APR	MAY	JUN	JUL	AUG	SEP	өст	NOV	DEC	тот
1948					24	126	117	127	161	161	86	114	916
1949	53	17	137	27	100	137	86		148	138	145	176	116
1950	27	88	114	31	104	174	186	174	180	186	180	179	162
1951	186	168	186	172	170	134	51	186	180	185	180	186	198
1952	183	171	179	180	186	180	175	186	177	143	180	186	212
1953	186	165	166	136	178	178	183	174	168	186	117		182
1954													
1955		105	167	174	180	166	174	181	162	162	179	176	182
1956	186	174	185	179	182	180	179	180	178	186	180	186	217
1957	186	167	186	180	186	172	186	178	180	181	180	186	216
1958	186	168	186	150		80	185	186	179	185	159	188	185
1959	75	168	186	180	176	180	177	183	180	186	179	186	205
1960	180	174	185	176	144	176	186	174	168	181	169	167	208
1961	185	168	186	180	186	180	192	63	141	124	141	146	187
1962	141	96	49	ιs	26	60	8	181	180	186	180	186	130
1963	186	168	175	165	185	180	186	186	180	133	175	185	210
1984	186	174	186	174	186	180	185	166	178	186	175	186	218
1965	182	168	186	171	186	180	186	186	180	185	172	181	216
966	185	168	186	179	186	180	186	175	65	179	157	129	187
1967	58	168	118	114	38								494
968													
969													
970													
971													
1972		105	119	102	110	113	80	109	86	94	73	51	104
1973	53	80	78	63	93	91	84	80	88	63	108	59	936
1974	101	102	83	80	88	98	87	85	64	101	106	115	112
975	101												

Results before 1968 obtained from 7-minute pen and ink records taken six times daily; analyzed by the first BEB method for 1948 to 1953; analyzed by the second BEB method for 1954 to February 1964; and analyzed by the CERC method for March 1964 to 1967. Results after January 1972 obtained from 1,024-second digital records taken four times daily.

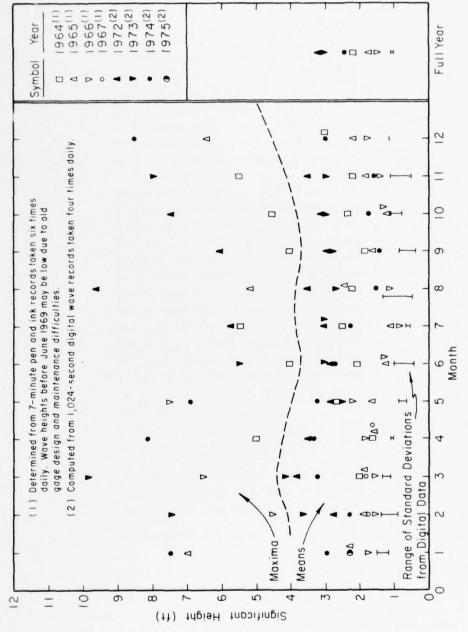

Maxima, means, and standard deviations of significant height from Huntington Beach, California. Figure A-103.


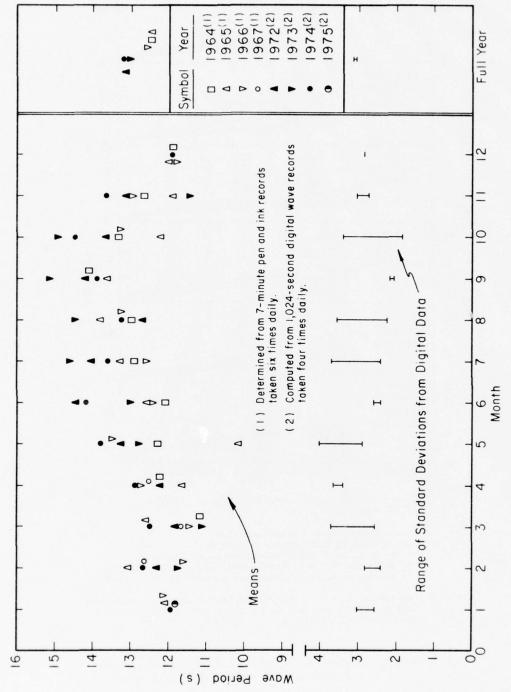


Figure A-104. Means and standard deviations of wave periods for Huntington Beach, California.

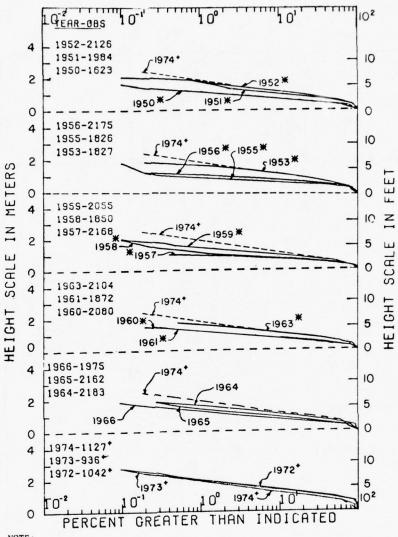

NOTE:

- = computed from 1,024-second digital wave records taken four times daily.
- * = determined by an old analysis method from 7-minute pen and ink records taken six times daily and compensated to compare with results from recent analysis methods (see Tables A-68 and A-69); wave heights may be low due to old gage design and maintenance difficulties.

Unmarked = determined from 7-minute pen and ink records taken six times daily; wave heights may be low due to old gage design and maintenance difficulties.

Figure A-105. Annual cumulative significant height distributions from Huntington Beach, California.

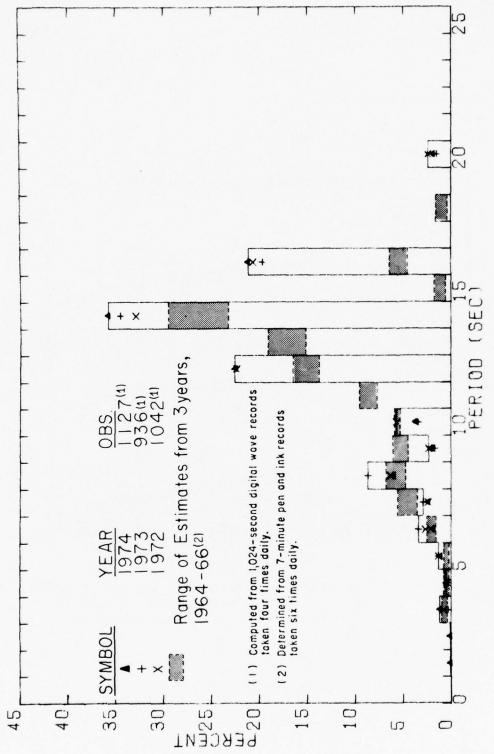


Figure A-106. Annual significant period distributions from Huntington Beach, California.

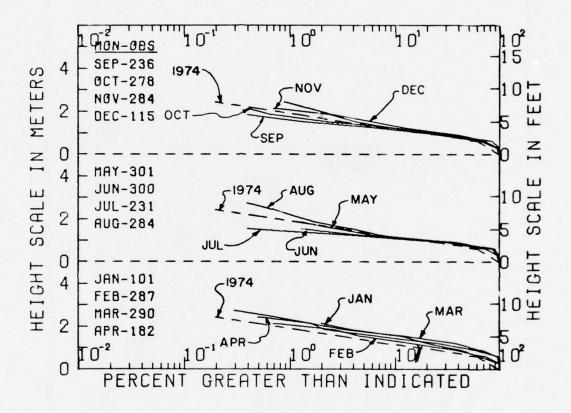


Figure A-107. Seasonal summaries of cumulative significant height distributions from Huntington Beach, California. Computed from 1,024-second digital wave records taken four times daily.

Table A-67. Wave climate for Huntington Beach, California.
Distribution of significant height versus period
(in observations per 1,000 observations).

101 OBSF	RVATIONS		SUMMAN	Y FOR	JAN 74					
PERIOD (SECS)			81G	. HFIG	HT (FT)					
									CUM.	-0-
	0-1 1-2	5-3	3-4	4-5	5-6	6-7	7+8	TOT. *	TOT.	AVG.
0.09									1000	0.00
1.0 - 1.9									1000	0.00
5.0 - 5.9									1000	0.00
5.0 - 5.9			20					20	1000	3.50
4.0 - 4.9			50					50	980	3.50
5.0 - 5.9			10					10	960	3.50
6.0 - 6.9	50						10	30	950	3,50
7.0 - 7.9		10			10			20	921	4.00
8.0 - 8.9		50	5.0	40	10	50	10	119	901	4.67
9.0 - 9.9	10	10						20	782	2.00
10.0 -10.9		10	50					30		3.17
11.0 -11.9									733	0.00
12.0 -12.9	158	119	69	10	30			386	733	2.55
13.0 -13.9									347	0.00
14.0 -14.9	89	30	59	40	30			845	347	3.06
15.0 -15.9								-		0.00
16.0 -16.9	69	30						99		1.80
TOTAL	347	455	218	89	79	20	50			2.97
CUM. TOTAL	1000 1000	653	426	208	119	40	20			•
COL. AVG.	0.00+15.50			11.61		8.50	7.50	12.11		

AVERAGE SIG. HEIGHT # 2.95 FT

VARIANCE OF SIG. HEIGHT # 2.17 FT SO

STANDARD DEVIATION OF HEIGHT # 1.47 FT

AVERAGE HAVE PERIOD # 11.94 SEC*

VARIANCE OF WAVE PERIOD # 9.24 SEC SQ*

STANDARD DEVIATION OF PERIOD # 3.04 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT MUNTINGTON BEACH PIER.

* CALMS ARE OMITTED.

287 ORSER	VATION	5		BUMMARY	FOR	FFB 72	FER 7	3 FEB 7	4		
PERIOD (SECS)				316.	HFIG	HT (FT))				
	0-1	1 = 2	2-3	3-4	4-5	5-6	6-7	7-8	101.		AVG.
0.09											0.00
1.0 - 1.9											0.00
2.0 - 2.9											0.00
3.0 - 3.9			3		,				3		2.50
5.0 - 5.9					3				3		3.07
		14		3	3			3	24		
7.0 - 7.9		3	3	17	,		3	3	17		3.50
8.0 - 8.9		10	24	17	3	3	,		28 59		2.91
9.0 - 9.9	3	3	21	1 /	,	,			58		2.13
10.0 -10.9	,	31	45	17	3		3		101		2.57
11.0 -11.9		31	4 5	1 /	,		,		101		0.00
12.0 -12.9		111	122	9.8	42	7	3		383		2.71
13.0 -13.9		1.1.1	166	4.0	4 2	,	,		303		0.00
14.0 -14.9		49	101	49	24	7	7		237		2.91
15.0 -15.9		4 4	101		-				63/		0.00
16.0 -16.9		31	42	24	10	3	3		119		2.83
TOTAL	3	254	362	233	98	21	21	,	11.	113	2.85
CUM. TOTAL	1000	997	742	380	146		28	,			C.03
COL. AVG.					12,25	13.17		6.00	12.44		
AVERAGE SIG. H	EIGHT I	2.	85 FT			AVERAGE	WAVE	PERIOD	. 12.	31 SEC	
VARIANCE OF SI	G. HEI	GHT .	1.35	FT 30				HAVE PE			5 SEC 30*
STANDARD DEVIA											2.66 880

											CUM.	
	0-1 1-2	2 - 3	3-4	4-5	5-6	6-7	7-8	6.9	9-10	101.		
0.09												0.00
1.0 - 1.9												0.00
2.0 - 2.9												0.00
3.0 - 3.9												0.00
4.0 - 4.9		3	3		3					10		3.85
5.0 - 5.9		3	7	7		,				21		4.17
6.0 - 6.9		3	17	21						41		3.92
7.0 - 7.9		3	21 38	21	10	10				59		4.32
8.0 - 8.9	10			31	21	10		3	3	131	869	4.32
9.0 - 9.9	,	7								24	738	5.03
10.0 -10.9	7	28	3	17	3					59	714	3.21
11.0 -11.9											655	0.00
12.0 -12.9	7	90	76	69	28	7				276	655	3.65
13.0 -13.9											379	0.00
14.0 -14.9	10	90	86	62	21	3				272	379	3.51
15.0 -15.9											107	0.00
16.0 -16.9		38	2 A	31	. 5					100	107	3.50
17.0 -17.9											7	0.00
18.0 -18.9											7	0.00
19.0 -19.9											7	0.00
20.0 -20.9		3			3					7	7	4.00
21.0 +												0.00
TOTAL	3 A	2A3	293	259	93	28		3	3			3.71
CUM, TOTAL	1000 1000	962	679	386	128	34	7	7	3			
COL. AVG.	0.00*11.32	12.99			11.57	9.75	0.00	8.50	8.50	12.02		

AVERAGE SIG. HEIGHT = 3.70 FT

VARIANCE OF SIG. HEIGHT = 1.46 FT SQ

STANDARD DEVIATION OF HEIGHT = 1.22 FT

AVERAGE WAVE PERIOD = 11.87 SEC*

VARIANCE OF WAVE PERIOD = 9.72 SEC SQ*

STANDARD DEVIATION OF PERIOD = 3.12 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT MUNTINGTON BEACH PIER.

* CALMS ARE OMITTED.

142 OBSERVATIONS SUMMARY FOR APR 72 APR 74

PERIOD SIG. HEIGHT (FT)

(SFCS)

										CUM.	ROW
	0-1 1-7	2-3	3-4	4.5	506	6-7	7-8	8-9	TOT	TOT	AVG.
0.09										1000	0.00
1.0 - 1.9										1000	0.00
5.0 - 5.9										1000	0.00
3.0 - 3.9										1000	0,00
4.0 - 4.9										1000	0.00
5.0 - 5.9	5	16	5	11					38	1000	3.07
6.0 - 6.9		27	4	5.5	5		5		66		3.92
7.0 - 7.9		11		5	11				27	896	4.10
8.0 - 8.9		16	18	60	11	5		5	137	868	4.30
9.0 - 9.9		5		11					16	731	3.83
10.0 -10.9			1.1	5	11				27	714	4.50
11.0 -11.9										687	0.00
12.0 -12.9		44	60	55					126	687	3.33
13.0 -13.9										560	0.00
14.0 -14.9	5	500	115	33	5		5		174	560	3.09
15.0 -15.0										187	0.00
16.0 -16.9		38	93	55	9				159		3.47
17.0 -17.9										27	
18.0 -18.9										27	
19.0 -19.9										27	
0.05- 0.05		55	5						27	27	
21.0 +										-	0.00
TOTAL	11	390	335	192	49	5	11	5			3.47
CUM. TOTAL	1000 1000	PAP	599	264	71	22	16	5			
COL. AVG.	0.00 10.00	13,35	13.70	10.59	10.06	8.50	10.50	8.50	12.65		

AVERAGE SIG. HFIGHT # 3.44 FT

VARIANCE OF SIG. HEIGHT # 1.09 FT SO

STANDARD DEVIATION OF MEIGHT # 1.04 FT

AVERAGE HAVE PERIOD # 12.50 SEC*

VARIANCE OF WAVE PERIOD # 12.57 SEC 80*

STANDARD DEVIATION OF PERIOD # 3.57 SEC*

301 OBSERVATIONS SUMMARY FOR MAY 72 MAY 73 MAY 74

PERIOD SIG, HFIGHT (FT) (SECS)

								CUM.	ROM
	0-1 1-2	2.3	3-4	4-5	5.6	6.7	TOT. *	TOT	AVG
0.09								1000	0.00
1.0 - 1.9								1000	0.00
2.0 - 2.9								1000	0.00
3.0 - 3.9		3	5.0				23		5.36
4.0 - 4.9			3				3	977	3.50
5.0 - 5.9		3	13				17	973	3.30
6.0 - 6.9		13	13 3 17 33				50	957	2.50
7.0 - 7.9		3	17	10		7	37		4.23
8.0 - 8.9	3	13	33	17		7	76	900	3.63
9.0 - 9.9	,		3				7	824	2.50
10.0 -10.9	17	3					17		1.70
11.0 -11.9									0.00
12.0 -12.9	33	86	50				140		2.40
13.0 -13.9									0.00
14.0 -14.9	27	252	90	10			379		2.72
15.0 -15.9									0.00
16.0 -16.9	7	140	103	17			566		5.99
17.0 -17.9									0.00
18.0 -18.9									0.00
19.0 -19.9								17	
20.0 -20.9		3	13				17	17	3.30
21.0 +									0.00
TOTAL	91	477	119	53		13			2.49
CUM. TOTAL	1000 1000		345	66	13	13			
COL. AVG.	0.00012.46	14.19	12.98	11.94	0.00	8.00	13.44		

AVERAGE SIG. HEIGHT = 2.87 FT AVERAGE WAVE PERIOD = 13.29 SEC*
VARIANCE OF SIG. HEIGHT = .57 FT SU VARIANCE OF WAVE PERIOD = 11.96 SEC SQ*
STANDARD DEVIATION OF MEIGHT = .75 FT STANDARD DEVIATION OF PERIOD = 3.46 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT MUNTINGTON BEACH PIER.

CALMS ARE OMITTED.

300 OBSERVATIONS SUMMARY FOR JUN 72 JUN 73 JUN 74
PERIOD SIG. HF1GHT (FT)
(SECS)

	0-1 1-2	2-3	3-4	4-5	5-6	101.	CUM. TOT	ROM AVG.	
0.09	0				, .		1000		
1.0 - 1.9							1000		
2.0 - 2.9							1000		
3.0 - 3.9			3			3	1000		
4.0 - 4.9			,			,	997		
5.0 - 5.9							997		
	3					20	997		
6.0 - 6.9	,	10	7			50		3.00	
7.0 - 7.9					3	13		2.65	
8.0 - 8.9	10	53	3		3	43			
9.0 - 9.9		10	2			13		2.75	
10.0 -10.9	3	3	7			13		2.75	
11.0 -11.9								0.00	
12.0 -12.9	33	83	27	13	3	160		5.69	
13.0 -13.9								0.00	
14.0 -14.9	27	583	147	10	3	470		5.85	
15.0 -15.9								0.00	
16.0 -16.4	3	120	93	17	3	237	263	3.06	
17.0 -17.9							27	0.00	
18.0 -18.9							27	0.00	
19.0 -19.9							27	0.00	
20.0 -20.9		17	10			27	27		
21.0 +						-		0.00	
TOTAL	80	557	310	40	13			2.85	
CUM. TOTAL	1000 1000	920	363	58	13				
COL. AVG.	0.00+12.50	14.22	14.41	14.67	13.00	14.14			

AVERAGE SIG. MEIGHT = 2.84 FT AVERAGE HAVE PERIOD = 13.97 SECTION OF SIG. MEIGHT = .45 FT SO VARIANCE OF MAVE PERIOD = 6.87 SECTION OF MEIGHT = .67 FT STANDARD DEVIATION OF PERIOD = 2.62 SECTION O

(SECS)													
	0-1	1-2	2-3	3-4	4-5	5-6	6-7	7-8		9-10	101.	CU".	
0.09													0.00
1.0 - 1.9	E E										4	1000	.50
2.0 - 2.9		4									4		1.50
3.0 - 5.9	,	7		4							18		1.50
4.0 - 4.9													0.00
5.0 - 5.9													0.00
6.0 - 6.9	4		7								11		1.85
7.0 - 7.9			4	4							• ;		3.00
8.0 - 8.9		7	,	14							85		2.75
9.0 - 9.9		- 45	14		7	4					39		3.32
10.0 -10.9		7	7	11	14	u	4				67		3.66
11.0 -11.9				,,							0 /		0.00
12.0 -12.9	4	49	70	21		11		a			158		2.59
13.0 -13.9													0.00
14.0 -14.9	11	102	225	92	7	4	4		4	4	451		24.5
19.0 -15.9		100	,							•			0.00
16.0 -16.9	11	42	89	53	11						204		2.55
17.0 -17.9		-											
18.0 -18.9												ii	
19.0 -19.9												ii	0.00
20.0 -20.9			7	4							11	ii	
21.0 .												• • •	0.00
TOTAL	39	225	430	232	39	21	7	4	4	u			2.67
CUM. TOTAL	1000	961	739	310	77	39	18	11	,				
COL. AVG.	10.95.1			13.45		12.00	12.50	12.50	14.50	14.50	13.61		

AVERAGE SIG. HEIGHT # 2.63 FT

VARIANCE OF SIG. HEIGHT # 1.45 FT 50

STANDARD DEVIATION OF HEIGHT # 1.20 FT

STANDARD DEVIATION OF PERIOD # 2.85 SEC#

PERIOD (SECS)

SIG. HEIGHT (FT)

									CUM.	ROW
	0-1	1 -2	2.3	3-4	4-5	5.6	6-7	TOT . *	101.	AVG
0.09									1000	0.00
1.0 - 1.9									1000	0.00
2.0 - 2.9									1000	0.00
3.0 - 3.9									1000	0.00
4.0 - 4.9									1000	0.00
5.0 - 5.9		4						4	1000	1.50
6.0 - 6.9								6		2.50
7.0 - 7.9				4				4		3.50
8.0 - 8.9			13	4	4			15	943	3.10
9.0 - 9.9		4						4	967	1.50
10.0 -10.9		4	4					8	954	2.00
11.0 -11.9									949	
12.0 -12.9	13	81	50	21	13	4		161	949	2.21
13.0 -13.9									788	0.00
14.0 -14.9	13	119	220	47	21	4	4	428	788	2.44
15.0 -15.9										0.00
16.0 -16.9	4	72	148	110	17			352		2.68
17.0 -17.9										
18.0 -18.9										0.00
19.0 -19.9										
20.0 -20.9		4	4					8		
4 0.15										0.00
TOTAL	30	885	428	186	55	8	4			2.49
CUM. TOTAL	1000	970	588	254	68	13	4			
COL. AVG.	13,934							14.61		

AVERAGE SIG. HEIGHT = 2.45 FT AVERAGE HAVE PERIOD = 14.47 SEC*
VARIANCE OF SIG. HEIGHT = .87 FT SQ VARIANCE OF HAVE PERIOD = 2.80 SEC*
STANDARD DEVIATION OF HEIGHT = .93 FT STANDARD DEVIATION OF PERIOD = 2.20 SEC*

RESULTS OBTAINED FROM 1024-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAVE GAGE LOCATED AT HUNTINGTON BEACH PIER.

* CALMS ARE OMITTED.

SIG. HEIGHT (FT)

278 OBSERVATIONS SUMMARY FOR OCT 72 OCT 73 OCT 74

PERIOD (SECS)

	0-1	1.5	2-3	3-4	4=5	5=6	6=7	7-8	101.	TOT.	POH AVG.
0.09	0-1	1-6	6		4.7.2	7=0	0-7	/-0			0.00
1.0 - 1.9										1000	
2.0 - 2.9										1000	0.00
3.0 - 3.9	4								4	1000	.50
4.0 - 4.9					4				4		4.50
5.0 - 5.9			4						4		2.50
6.0 - 6.9			4	7	7				18		3.70
7.0 - 7.9			4	4	11				16		3.90
8.0 - 8.9			11	ū	4				10		3.10
9.0 - 4.9											0.00
10.0 -10.9		1.8	11						29		1.88
11.0 -11.9		1.0	٠.						•		0.00
12.0 -12.9	14	58	54	14	1 6	7			165		2.41
13.0 -13.9				1-	•						0.00
14.0 -14.9	18	101	183	61	14	4	4	4	388		2.49
15.0 -15.9	•		100	0,1		_	-	-	-		0.00
16.0 -16.9	11	32	140	90	5.5	4			299		2.80
17.0 -17.9		-	1.40	• 0		_			-		0.00
18.0 -18.9											0.00
19.0 -19.9											0.00
20.0 -20.9	4	22	14	14					54		2.23
21.0 +				1-							0.00
TOTAL	50	230	424	194	79	14	4	a a			2.60
CUM. TOTAL	1000	950	719		101	55	,	4			
COL. AVG.	14.00-1		14.65	15,19	12.18	14.00	14,50		14.49		

AVERAGE SIG. HEIGHT # 2.57 FT AVERAGE WAVE PERIOD # 14.34 SEC \$Q*

BTANDARD DEVIATION OF HEIGHT # 1.07 FT SYANDARD DEVIATION OF PERIOD # 2.67 SEC*

1

t

115 ORSER	W			FOR O	<i>-</i> .,,						
115 04564	VA11043	•	DHAM		ec 14						
PERIOD			MIG	HEIGH	1 (FT)					
(SECS)			_								
										CUM.	ROW
	0-1 1-2	5-3	3-4	4-5	5-6	6-7	7-8	8-9	TOT.*	TOT.	AVG.*
0.09										1000	0.00
1.0 - 1.9											0.00
2.0 - 2.9											0.00
3.0 - 3.9			9						9		3.50
4.0 - 4.9										991	0.00
5.0 - 5.9		9		9	9				56	991	4.17
6.0 - 6.9		17	•						26	965	2.83
7.0 - 7.9			17	17		9			43	939	4.50
8.0 - 8.9	35 17	26	26	•	17				113	896	3.04
9.0 - 9.9	17	17	17						52	783	2.50
10.0 -10.9	•	35	•						52	730	2.50
11.0 -11.9										678	0.00
12.0 -12.9	9	183	70	•		9		9	287		3.08
13.0 -13.9											0.00
14.0 -14.9	35	157	104	26	9				330		2,95
15.0 -15.9				-					-		0.00
16.0 -16.9	26	26							52		2.00
17.0 -17.9										9	0.00
18.0 -18.9											0.00
19.0 -19.9										9	0.00
20.0 -20.9									9		
21.0 +											0.00
TOTAL	139	470	261	70	35	17		9			2.99
CU". TOTAL	1000 1000	861	391	130	61	26		·			- • · ·
COL. AVG.	0.00012.75					10.00	0.00	12.50	12.09		

AVERAGE SIG. HEIGHT # 3.00 FT AVERAGE HAVE PERIOD # 11.95 SEC*
VARIANCE OF SIG. HEIGHT # 1.27 FT SQ VARIANCE OF HAVE PERIOD # 8.20 SEC SQ*
STANDARD DEVIATION OF HEIGHT # 1.13 FT STANDARD DEVIATION OF PERIOD # 2.86 SEC*

2000 003		•		-	7 FOR 2	I HONTH	S 7EB 1	72 THORO	UCH DEC	74			
(8tcs)				816	. +116	HT (FT)							
			2-3	3-4	4+5			7.8			***	CUM:	ROW
	0-1	1-5	6.,	,	•••	,	•	,	•				
0.0													0.00
1.0 - 1.0												1000	.50
5.0 - 5.4													1.50
3.0 - 3.9	1	•	5	:									2.67
4.0 - 4.9		1		•	1								3.02
5.0 - 5.9		•	:	:	•			•			15		3.50
			•		•			1			24		3.40
7.0 - 7.9		_				:	•				25		3.67
8.0 - 8.9		,	1.	10	15	,	,		,		••		3.50
9.0 - 4.4		•		•	,	-					19		2.70
10.0 -10.9	1	10	15	10	•	5					•3		2.67
11.0 -11.0													0.00
12.0 -12.0	•	50		46	50	,	1				510		2.77
13.0 -13.0													0.00
14.0 -14.0	5	50	174		50	•		1			352		2.77
15.0 -15.0													0.00
16.0 -16.9		33	•1	65	10		1				213	531	2.61
17.0 -17.9												10	
18.0 -18.9												10	0.00
19.0 -19.9												10	0.00
20.0 -20.4		3									10	10	10.5
21.0 +													
TOTAL	10	171	421	261		20	11	3	1	1			2.09
CUM. TOTAL	1000	984	412	391	130	43	17		2	1			
COL, AVG.	13.070		13,70			11.00	10.63	5.80	11.00	11.50	13.33		

AVERAGE SIG HEIGHT # 2.00 PT AVERAGE MAYE PERIOD # 13.10 SEC VARIANCE OF SIG. MEIGHT # 1.21 PT 80 VARIANCE OF MAYE PERIOD # 0.00 SEC 800 STANDARD DEVIATION OF PERIOD # 3.11 SEC

RESULTS OBT. INCO FROM 1020-SECOND DIGITAL RECORDS TAKEN WITH A CONTINUOUS WIRE WAYE GASE LOCATED AT MUNTINGTON BEACH PIER.

CALHS ARE CHITTED.

6294 Onb	ERVATION		- 1		* *0*	16 HONT	-	64 TIOLO	ATR 674	7		
(\$EC\$)				+61	ENT (P	"						
										tur.	HO.	
	0-1	1-5	5-3	3	4-5	5-0	6-7	7-0	101.0	101.0		
.9 - 1.0	15									1000	.00	
2,0 - 2,4										1000	.00	
2,5 - 2.9										1000	.00	
1.0 - 1.4	1	1							2	1000	1.00	
3.9 - 3.4	1	3							,		1.43	
4.0 . 4.4		3	1								1.62	
5.0 . 5.4	1	3	1						,		1.05	
		10							15		1.72	
7.0 . 7.4		13	•	,					**	945	1.74	
4.0	,		1.		i						1.40	
	,	10	14		i				54		1.00	
10.0 -10.0		10	- 11	3	i				54	010		
11.0 -11.9	10		18	,	1	1			61	754	1.02	
12.0 -12.9	50		54			1			152	673	1.02	
13.0 -13.0	5.7	100	36		2		1		171		1.71	
14.0 -10.4	34	106		18	•				271		1.80	
15.0 -15.4	1	,	2	1					12		1.97	
16.0 -16.9	3	27	10		1	1			59	67	2.20	
17.0 -17.0											2.50	
18.0 -18.9		3	3								2.46	
TOTAL	142	545	210		21	5					1.01	
CUM. TOTAL	1000	850	313	•	20		3					
COL. AVG.			12.00			11,05	11.29	14,00	12.00			

AVERAGE SIR. MEIGHT # 1.80 PT SO STANDARD DEVIATION OF MEIGHT # .80 PT SO VARIANCE OF MAYE PERIOD # 7.10 SEC SCONTANDARD DEVIATION OF PERIOD # 2.07 SEC

RESULTS ORTALING FROM 7-MINUTE PEN AND THE OCCUPOS TAKEN WITH A STEP PESISTANCE WAVE CASE LOCATED AT MUNTINGTON APACH PIEP.

Calms are Omitted.

Wave heights may be low due to old gage design and maintenance difficulties.

Table A-68. Comparison of results from different pen and ink wave record analysis methods, Huntington Beach, California.

Dates of	Significant	heigh	ts ¹	Significant	perio	ds ²
data sample reanalyzed by CERC method	Correlation between heights	A (ft)	В	Correlation between periods	(s)	D
July 1950	0.93	0.02	0.89	0.69	3.00	0.70
Mar. 1951	0.77	0.25	0.82	0.56	3.78	0.61
Jan. 1958	0.81	0.09	0.65	0.50	2.12	0.75
Feb. 1960	0.89	0.07	0.81	0.54	2.34	0.81
Nov. to Dec. 1962	0.85	0.54	0.64	0.64	5.03	0.59

¹Significant height from the CERC method

= $A + B \times (significant height from old method)$.

²Significant period from the CERC method

= $C + D \times (significant period from old method)$.


Table A-69. Regression equations used to compensate significant height statistics for Huntington Beach, California.


Year	Compensation equations (ft)
1949 to 1950	$H_{NEW} = 0.02 + 0.89 H_{OLD}$
1951 to 1953	$H_{NEW} = 0.25 + 0.82 H_{OLD}$
1954 to 1958	$H_{NEW} = 0.09 + 0.65 H_{OLD}$
1959 to 1960	$H_{NEW} = 0.07 + 0.81 H_{OLD}$
1961 to 1963	$H_{NEW} = 0.54 + 0.64 H_{OLD}$
1964 to 1974	No compensation


NOTE:


 H_{NEW} = estimate of significant height that would have been obtained by the CERC method of pen and ink record analysis.


 H_{OLD} = significant height obtained by old method of pen and ink record analysis.

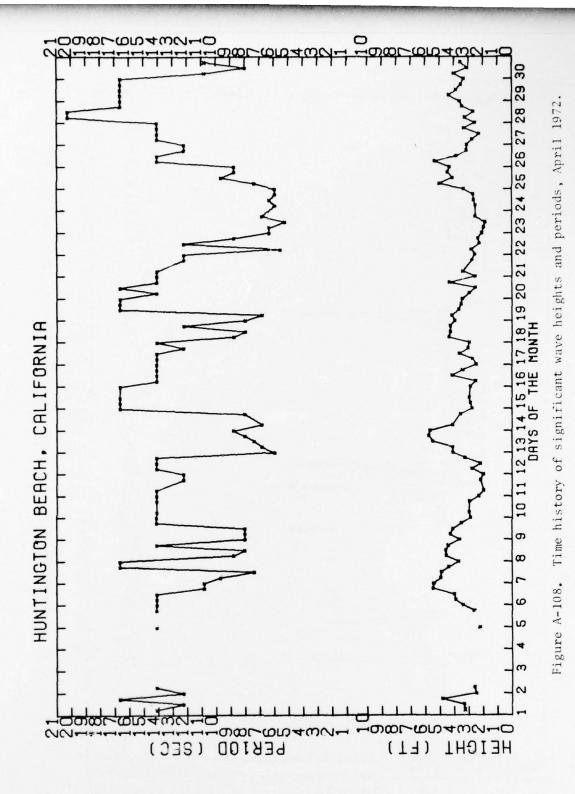

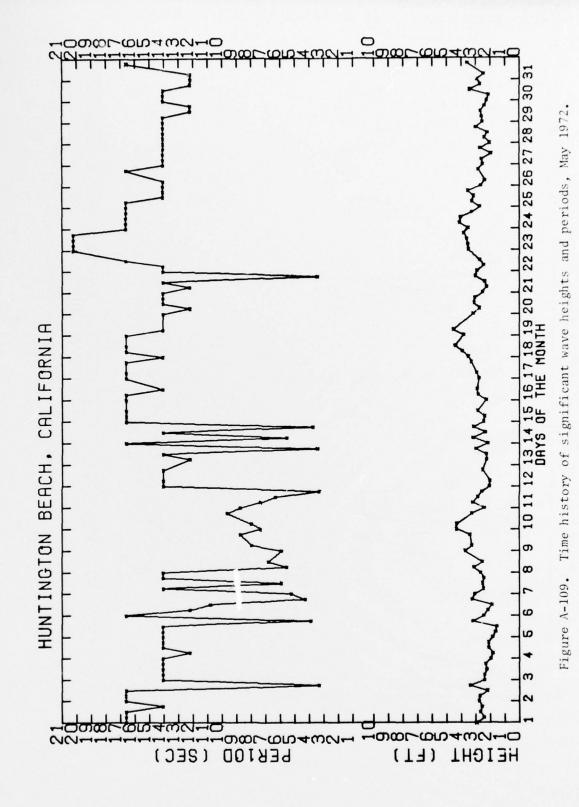

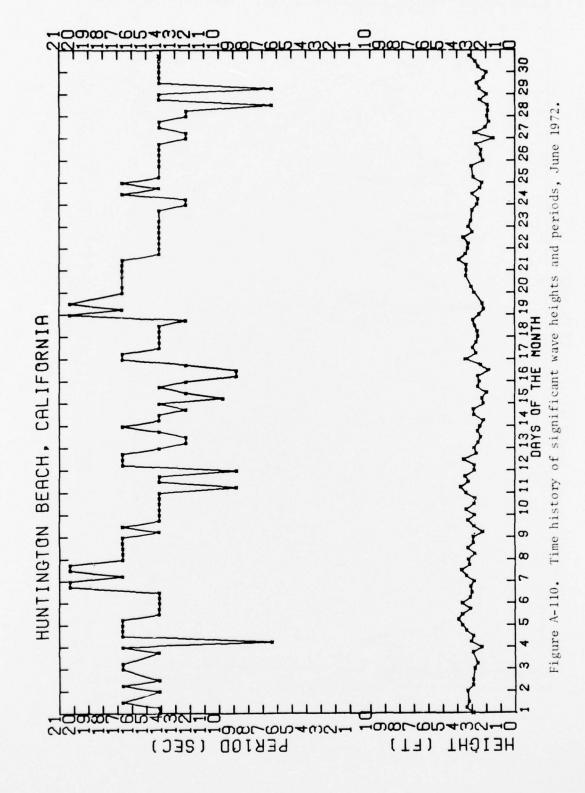

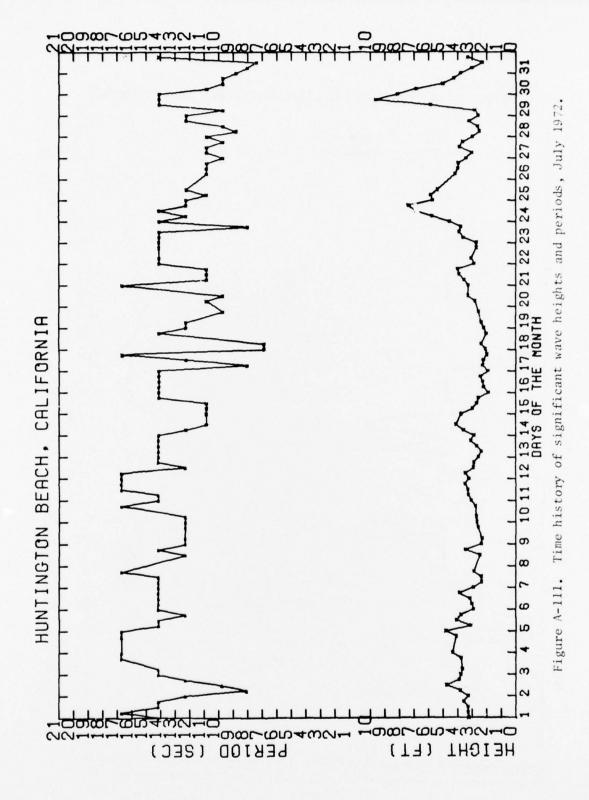


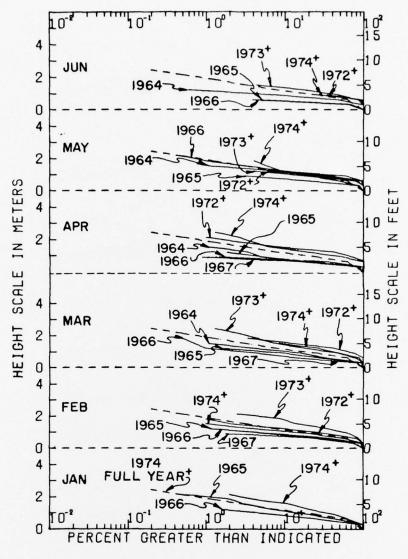

NOTE:

- = computed from 1,024-second digital wave records taken four times daily.
- Unmarked = determined from 7-minute pen and ink records taken six times daily; wave heights may be low due to old gage design and maintenance difficulties.

Figure A-112. Monthly cumulative significant height distributions from Huntington Beach, California.

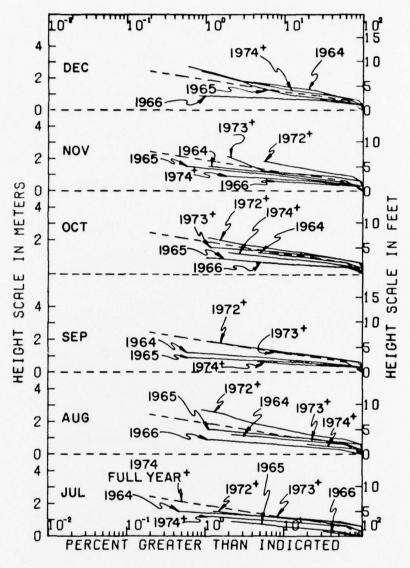

NOTE:

- = computed from 1,024-second digital wave records taken four times daily.
- Unmarked = determined from 7-minute pen and ink records taken six times daily; wave heights may be low due to old gage design and maintenance difficulties.


Figure A-112. Monthly cumulative significant height distributions from Huntington Beach, California.--Continued

PROCEDURE FOR ANALYSIS OF WAVE DATA FROM 7-MINUTE PEN AND INK RECORDS (BASED ON A RAYLEIGH DISTRIBUTION FOR WAVE HEIGHT)

- 1. Run the period template (Fig. B-1) along the 7-minute record until a group of fairly uniform waves is found which should contain some of the highest waves. A template can be fabricated on a clear overlay such as acetate.
- 2. Determine the appropriate period of the waves selected in step 1 by using the template according to instructions. When the wave period on the chart falls between two of the periods shown on the template, the analyzer may approximate what is considered to be nearest to the exact period; e.g., if the period is about the same amount longer than the 5-second period, then it is shorter than the 6-second period, the period must be about 5.5 seconds.
- 3. Use the table below to determine which wave should be measured in the full 7-minute record to get the approximate significant height of the waves. The wave number is determined by calling the highest wave in the full 7-minute record as wave number 1; the second highest wave is number 2, etc. Wave height is defined as the difference in elevation between a wave crest and the preceding trough.

Wave period (seconds	Number of wave to measure
3.0	19
3.5	16
4.0	14
4.5	13
5.0	11
5.5	10
6.0	9
7.0	8
8.0	7
9.0	6
10.0	6
11.0	5
12.0	5
13.0	4
14.0	4
15.0	4
16.0	4

- 4. Determine the height of the wave given by step 3, in terms of small divisions on the chart paper.
- 5. Using the appropriate relationship between chart paper divisions and actual elevations in feet, convert the wave height determined in step 4 from chart divisions to feet. Estimate to the nearest tenth of a foot.

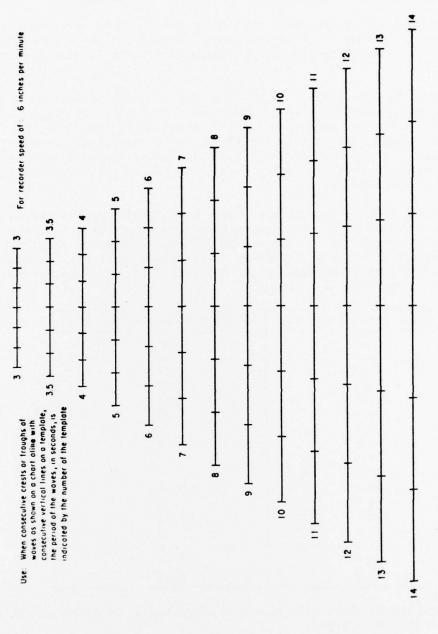

;

The state of the s

Figure B-1. Sample wave-period template (from Williams, 1969).

6. Tabulate the data on CERC Form 118-72 (Fig. B-2) or an equivalent. The form has five columns containing the following data: (a) The month, day, and year is indicated under "Date"; (b) the beginning time of the wave record such as 0400 is indicated under "Time of Start"; (c) the significant wave period in seconds is listed under "Period"; (d) the significant wave height in feet is listed under "Height"; and (e) the "Peak" column which can be used for maximum wave height when desired.

DATE	TIME OF START	PERIOD (SECONDS)	HEIGHT (FEET)	PEAK	DATE	TIME OF START	PERIOD (SECONDS)	HEIGHT (FEET)	PEAI
	CERC 118								

Figure B-2. Form for tabulating wave data.

Thompson, Edward F.	Wave climate at selected locations along U.S. coasts / by Edward F. Thompson Fort Belvoir, Va.: U.S. Coastal Engineering Research Center, 1977. 364 p.: ill. (Technical report - U.S. Coastal Engineering Research Center; no. 77-1) Bibliography: p. 56.	Significant heights and periods for 19 wave gage locations are summarized, and provide data on ranges, annual and seasonal variations of wave climate. Staff and pressure sensitive gages, generally shorebased, were used to obtain the data.	1. Wave records. 2. Wave height. 3. Wave gages. 1. Title. 11. Series: U.S. Coastal Engineering Research Center. Technical report no. 77-1.	TC203 .U581tr no. 77-1 627	Thompson, Edward F.	Wave climate at selected locations along U.S. coasts / by Edward F. Thompson Fort Belvoir, Va.: U.S. Coastal Engineering Research Center, 1977. 364 p.: ill. (Technical report - U.S. Coastal Engineering Research Center; no. 77-1) Bibliography: p. 56.	Significant heights and periods for 19 wave gage locations are summarized, and provide data on ranges, annual and seasonal variations of wave climate. Staff and pressure sensitive gages, generally shorebased, were used to obtain the data.	1. Wave records. 2. Wave height. 3. Wave gages. 1. Title. 11. Series: U.S. Goastal Engineering Research Center. Technical report no. 77-1.	TC203 US81tr no. 77-1 627
Thompson, Edward F.	Wave climate at selected locations along U.S. coasts / by Edward F. Thompson Fort Belvoir, Va.: U.S. Coastal Engineering Research Center, 1977. 364 p.: £11. (Technical report - U.S. Coastal Engineering Research Center: no. 77-1) Bibliography: p. 56.	Significant heights and periods for 19 wave gage locations are summarized, and provide data on ranges, annual and seasonal variations of wave climate. Staff and pressure-sensitive gages, generally shorebased, were used to obtain the data.	1. Maye records. 2. Waye height. 3. Waye gages. 1. Title. II. Series: U.S. Coastal Engineering Research Center. Technical report no. 77-1.	TC203 .U581tr no.77-1 627	Thompson, Edward F.	Wave climate at selected locations along U.S. coasts / by Edward F. Thompson Fort Belvoir, Va.: U.S. Coastal Engineering Research Center, 1977. 364 p.: ill. (Technical report - U.S. Coastal Engineering Research Center; no. 77-1) Bibliography: p. 56.	Significant heights and periods for 19 wave gage locations are summarized, and provide data on ranges, annual and seasonal variations of wave climate. Staff and pressure-sensitive gages, generally shorebased, were used to obtain the data.	 Wave records, 2. Wave height. 3. Wave gages. 1. Title. II. Series: U.S. Coastal Engineering Research Center. Technical report no. 77-1. 	TC203 .U581tr no.77-1 627

.

: