

AFHRL-TR-77-13

AIR FORCE



HUMAN

RESOURCES

AD A 043195

AD No.
 FILE COPY

**THE EFFECTS OF SYSTEM AND ENVIRONMENTAL
FACTORS UPON EXPERIENCED PILOT PERFORMANCE
IN THE ADVANCED SIMULATOR FOR PILOT TRAINING**

By

Philip A. Irish, III, 1stLt, USAF
Paul M. Grunzke, 1stLt, USAF
Thomas H. Gray
Brian K. Waters, Major, USAF

FLYING TRAINING DIVISION
Williams Air Force Base, Arizona 85224

April 1977

Final Report for Period May 1975 - October 1976

DDC
AUG 22 1977
A

Approved for public release; distribution unlimited.

LABORATORY

AIR FORCE SYSTEMS COMMAND

NOTICE

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This final report was submitted by Flying Training Division, Air Force Human Resources Laboratory, Williams Air Force Base, Arizona 85224, under project 1123, with HQ Air Force Human Resources Laboratory (AFSC), Brooks Air Force Base, Texas 78235.

This report has been reviewed and cleared for open publication and/or public release by the appropriate Office of Information (OI) in accordance with AFR 190-17 and DoDD 5230.9. There is no objection to unlimited distribution of this report to the public at large, or by DDC to the National Technical Information Service (NTIS).

This technical report has been reviewed and is approved for publication.

EDWARD E. EDDOWES, Technical Adviser
Flying Training Division


DAN D. FULGHAM, Colonel, USAF
Commander

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER (14) AFHRL-TR-77-13	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) THE EFFECTS OF SYSTEM AND ENVIRONMENTAL FACTORS UPON EXPERIENCED PILOT PERFORMANCE IN THE ADVANCED SIMULATOR FOR PILOT TRAINING	5. TYPE OF REPORT & PERIOD COVERED Final rept. May 1975 - October 1976	
7. AUTHOR(s) Philip A. Irish, III Paul M. Grunzke Thomas H. Gray ↓ Brian K. Waters	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Flying Training Division Air Force Human Resources Laboratory Williams Air Force Base, Arizona 85224	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62205F 11230318	
11. CONTROLLING OFFICE NAME AND ADDRESS HQ Air Force Human Resources Laboratory (AFSC) Brooks Air Force Base, Texas 78235	12. REPORT DATE April 1977	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) (12) G.P.F.	13. NUMBER OF PAGES 60	
	15. SECURITY CLASS (of this report) Unclassified	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) economical experimental designs pilot performance G-seat simulation motion visual display performance measurement		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The objectives of the study were: (a) to assess the relative contribution of platform motion, G-seat and visual factors to pilot performance in the Advanced Simulator for Pilot Training (ASPT), (b) to acquire information on the relationships between system output and pilot input measures as collected in the ASPT, and (c) to evaluate the utility of economical multifactor designs for Flying Training Division, Air Force Human Resources Laboratory (AFHRL/FT) research in flight simulation. Three experienced T-37 pilots flew five maneuvers in the ASPT under combinations of the independent variables platform motion, G-seat, field of view, turbulence, wind and ceiling/visibility. Automated performance measures based on system parameters, pilot inputs and derived scores were collected and analyzed. Both main and interactive effects of the independent variables were found for a majority of the maneuvers. A discussion of the utility of the economical multifactor designs is included. Additionally, implications for determining the direction of future studies are discussed.		

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

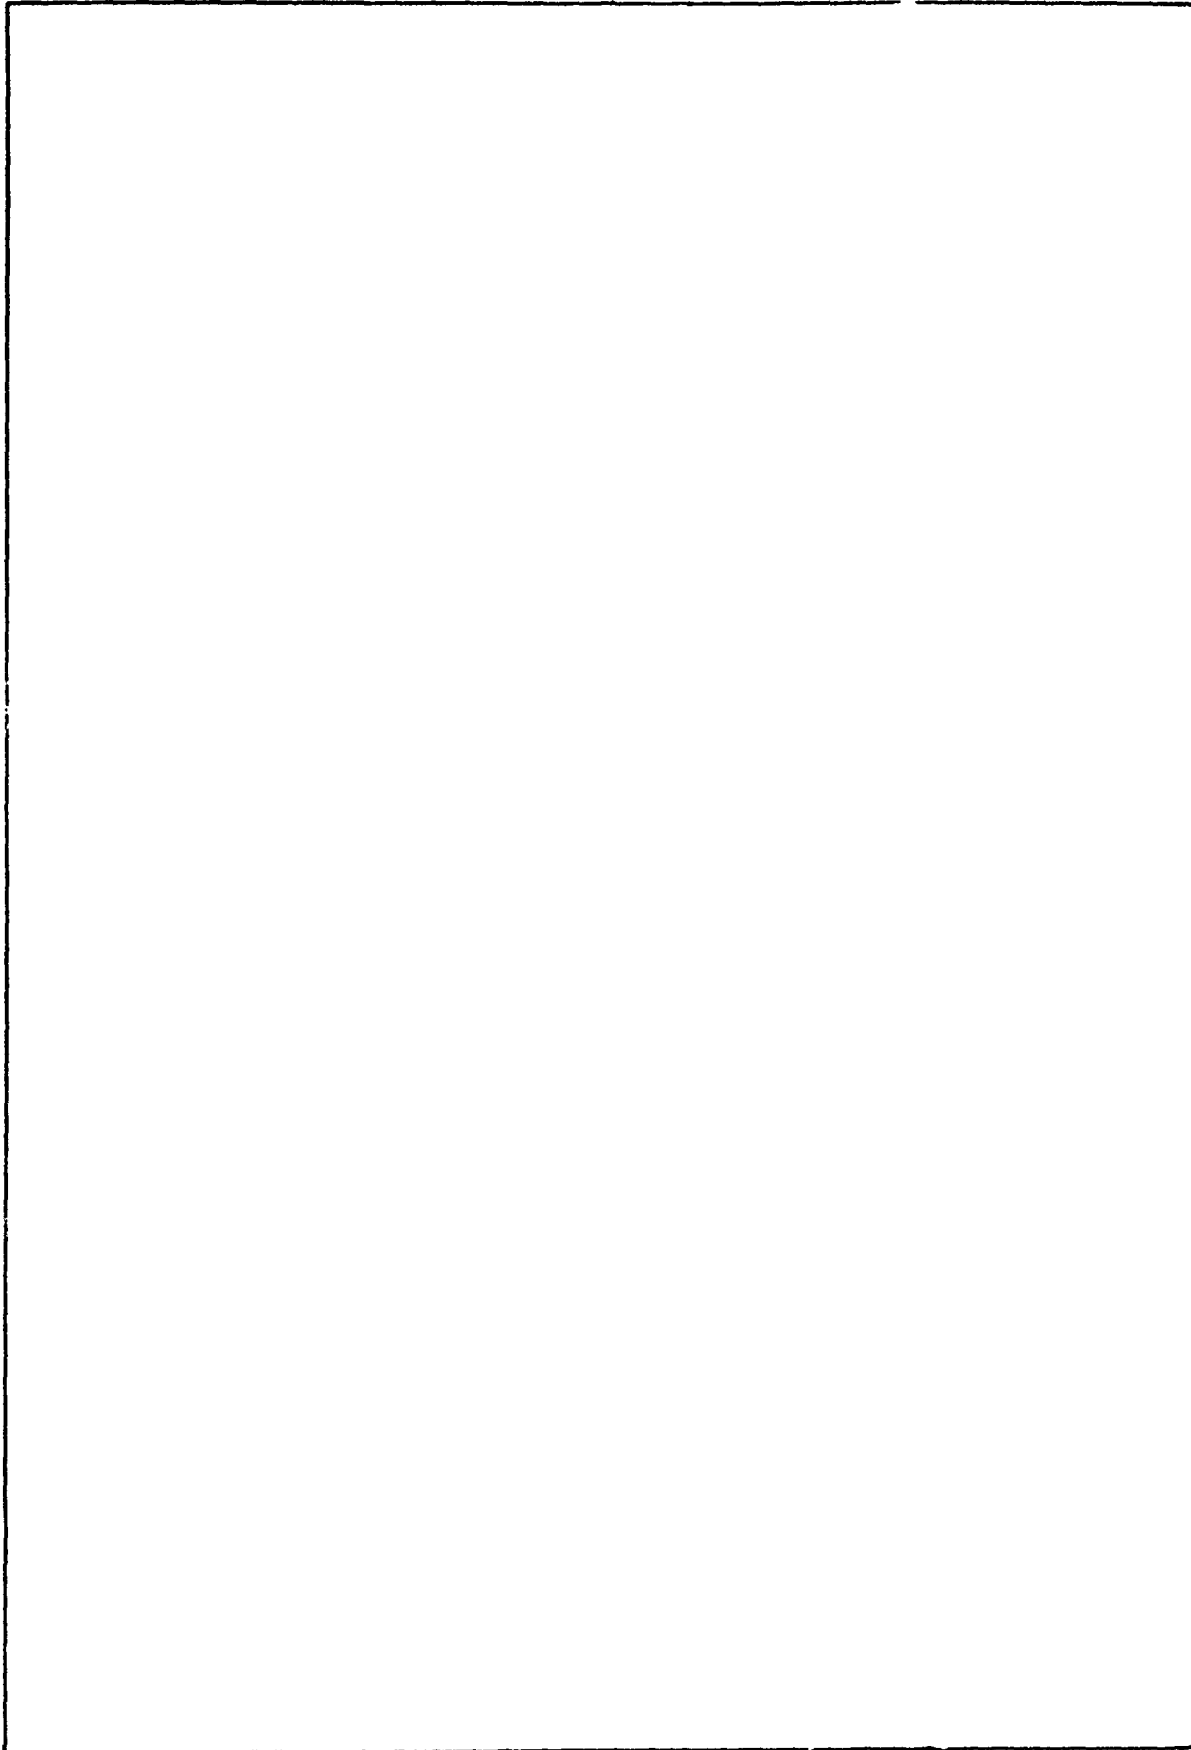

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

PREFACE

This effort was conducted by the Flying Training Division of the Air Force Human Resources Laboratory, Williams Air Force Base, Arizona 85224, and supported by the 82nd Flight Training Wing, Williams Air Force Base, Arizona. The project was completed under 1123, United States Air Force Flying Training Development; task 112303, the Exploitation of Simulation in Flying Training; and work unit 1123-03-18, Simulation Design Configurations Study I (Motion, G-Seat, Visual). Dr. William V. Hagin was the project scientist and Mr. Jim Smith was the task scientist. The authors would like to extend special thanks to Capt Thomas Beil, Capt James Gormley, and Capt Louis Lake, for their dedication as subjects for the duration of the study. The report covers research performed between May 1975 and October 1976.

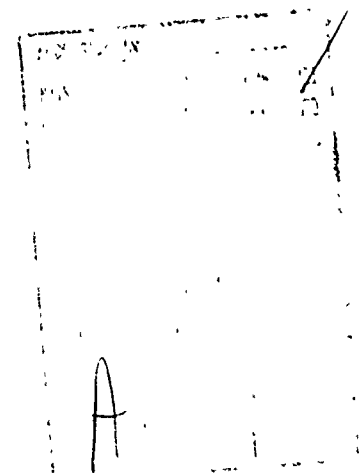


TABLE OF CONTENTS

	Page
I. Introduction	5
Problem Statement and Study Rationale	5
Study Objectives	5
Background	5
II. Method	6
Subject	7
Apparatus	7
Design	7
Independent Variables	8
Flight Tasks	8
Dependent Variables	8
Procedures	9
Analysis	11
III. Results	12
$3^3 2^3$ Environmental Variables	12
$3^3 2^3$ System Variables	14
Environmental by Environmental Variable Interactions in the $3^3 2^3$ Design	19
System by System Variable Interactions in the $3^3 2^3$ Design	19
System by Environmental Variable Interactions in the $3^3 2^3$ Design	26
Subject Effects	34
IV. Discussion of Results	34
Introduction	34
Environmental Variables	34
System Variables	35
System by System Variable Interactions	35
System by Environmental Variable Interactions	36
Subject Effects	36
Dependent Measures	36
V. Discussion of Method	37
Study Design and Analysis	37
Dependent Measures	37
VI. Summary and Conclusions	37
References	38
Bibliography	39
Appendix A: Description of Performance Measurement Algorithms	41
Appendix B: Multivariate Analysis of Variance Source Tables (All Maneuvers)	46

LIST OF ILLUSTRATIONS

Figure	Page
A1 Takeoff scoring sequence	42
A2 GCA and landing scoring sequence	43
A3 360° Overhead pattern and landing scoring sequence	44
A4 Slow flight scoring sequence	45
A5 Aileron roll scoring sequence	45

LIST OF TABLES

Table	Page
1 Dependent Variable Listing	10
2 Wind Main Effects Across Takeoff, GCA, and Overhead Pattern Maneuvers	13
3 Turbulence Main Effects Across Takeoff, GCA, and Overhead Pattern Maneuvers	15
4 Ceiling/Visibility Main Effects Across Takeoff, GCA, and Overhead Maneuvers	16
5 Motion Main Effects Across Takeoff, GCA, and Overhead Pattern Maneuvers	17
6 Field of View Main Effects Across Takeoffs, GCAs, and Overhead Pattern Maneuvers	18
7 G-Seat Main Effects Across Takeoffs, GCAs, and Overhead Pattern Maneuvers	20
8 Turbulence Main Effects for the Slow Flight and Aileron Roll Maneuvers	21
9 System Variable Main Effects in the Slow Flight and Aileron Roll Maneuvers	22
10 Significant System by System Variable Interactions Across All Maneuvers	23
11 Field of View by Motion Interaction Cell Means for Takeoff	23
12 Motion by Field of View Interaction Cell Means for GCA	24
13 Motion by FOV Interaction Mean Ratings for the GCA and Takeoff Maneuvers	24
14 Motion by G-Seat Interaction Cell Means for Takeoff	25
15 Motion by G-Seat Interaction Cell Means for Overhead Pattern	25
16 Motion by G-Seat Interaction Mean Ratings for the Takeoff and Overhead Pattern Maneuvers	26
17 Significant System by Environmental Interactions Across all Maneuvers	27
18 Turbulence by Motion Interaction Cell Means for Takeoff	27
19 Turbulence by Motion Interaction Cell Means for GCA	28
20 Turbulence by Motion Interaction Cell Means for Overhead Pattern	28
21 Turbulence by Motion Interaction Mean Ratings for the Takeoff, GCA and Overhead Pattern Maneuvers	29
22 Ceiling/Visibility by FOV Interaction Cell Means for GCA	30
23 Ceiling/Visibility by G-Seat Interaction Cell Means for GCA	30
24 Ceiling/Visibility by FOV and Ceiling/Visibility by G-Seat Interaction Mean Ratings for the GCA Maneuver	31
25 Ceiling/Visibility by FOV by G-Seat Interaction Cell Means for Takeoff	31
26 Ceiling/Visibility by FOV by G-Seat Interaction Cell Means GCA	32
27 Ceiling/Visibility by FOV by G-Seat Interaction Cell Means for Overhead Pattern	32
28 Ceiling/Visibility by FOV by G-Seat Interaction Mean Ratings for the Takeoff, GCA and Overhead Pattern Maneuvers	33

THE EFFECTS OF SYSTEM AND ENVIRONMENTAL FACTORS UPON EXPERIENCED PILOT PERFORMANCE IN THE ADVANCED SIMULATOR FOR PILOT TRAINING

I. INTRODUCTION

Problem Statement and Study Rationale

Three primary sources of cues used for aircraft control are provided to the pilot by cockpit instrumentation, the external visual scene, and vehicle motion. Because pilot performance is fundamentally dependent upon information originating from these sources, modeling these aspects of the environment has been considered of vital importance in the design of flight simulators. Although satisfying simulator motion and visual requirements is difficult, the situation is further complicated by possible interaction effects that may occur between them. The present study is a preliminary investigation of these phenomena and their effects upon experienced pilot performance.

An aircraft in flight has unlimited freedom of rotational and translational movement around three axes. Rotational movement consists of roll, pitch, and yaw, and translational movement is comprised of lateral, longitudinal and vertical displacements. State-of-the-art motion simulation devices (e.g., motion platforms, G-seats and G-suits; individually and in combination) can generate movements in these dimensions to various levels of fidelity.

Visual scene generation also has a variety of state-of-the-art systems which have been utilized to increase the fidelity of aircraft simulators (e.g., computer image generation, model board, and calligraphic displays). The fidelity of visual simulation may be enhanced by: (a) increasing the field of view (FOV), (b) expanding the edge generation capacity in computer image generation systems, or (c) increasing the resolution and the FOV of camera probes used with model boards. Thus, the fidelity of the outside-the-cockpit visual scene, as well as the fidelity of kinesthetic cueing mechanisms, must be selected based upon decisions on which essential cues are required by the pilot and in what manner they should be presented.

Considering the extensive future use of flight simulation projected by the Air Force, information on simulator design requirements is urgently needed. To accomplish this task, ideally, a large factorial study could be conducted that simultaneously addressed all facets of the problem.

Such an approach is impractical, and an alternative strategy must be adopted. This study was the first of a series developed according to this strategy, and was intended to provide a "first look" at certain major variables of motion, the visual scene, and their interactions. The experiment was limited to what could be reasonably accomplished in light of subject availability, equipment capability, and software support development at the time of the study.

Study Objectives

The purposes of the study were:

First, to assess the relative contribution of platform motion, G-seat, and visual factors to pilot performance under systematically varied environmental conditions. The results of this evaluation should begin to define the variables and levels of variables to be utilized in follow-on studies in this series.

Second, to acquire information on the relationships between system output measures and pilot input measures as measured in the Advanced Simulator for Pilot Training (ASPT) when flown under specified tasks, environmental conditions, and simulator configurations.

Third, to evaluate the utility of economical multifactor designs to Air Force Human Resources Laboratory, Flying Training Division (AFHRL/FT) investigations into the contributions of motion and visual factors upon pilot performance in flight simulators.

Background

Historically, the art of aircraft simulation has had as one of its foremost goals the development of a maximum fidelity device which could provide realistic cues matching those present in the aircraft. Currently, the major areas of concern lie in motion and visual cue generation.

Movement and/or tactile pressure is a necessary condition for motion cueing. One recent technical approach for providing realistic sensory information has resulted in the creation of pneumatically-driven seats (e.g., G-seat, dyna-seat). Air-driven bladders (located on the seat and back rest) inflate or deflate to provide the "seat of the pants" cues which are normally experienced in

flight (Bell, 1974). Research pertaining to these newly developed "G-seat" devices has been understandably limited due to the small number which have been installed for use on sophisticated simulators. In one study on G-seat cueing, however, performed by Taylor and Gerber (1969), it was reported that improvements in pilot training resulted when "G-seat forces" were provided in conjunction with motion cueing.

Kinesthetic and vestibular cueing are also provided by the use of complex platform motion systems. Probably the most recent and most commonly used are the synergistic six degree of freedom (DOF) systems of various excursion lengths. In the area of platform motion simulation, research has been prolific. Numerous investigations have been directed towards determining which DOF are required for motion systems in particular settings as well as what levels of fidelity are needed (Bergeron, 1970; Jacobs, Williges, & Roscoe, 1973). This body of research, however, is equivocal, and findings have often not been consistent from study to study.

Much of the research to date has shown that simulator motion produces improved pilot performance in controlling the simulator (Borlace, 1967; Brown, Johnson, & Mungall, 1960). Additionally, Rathert, Creer, and Sadoff (1961) demonstrated that varying the fidelity of motion cueing correspondingly improved the pilot's performance in the simulator. Koonce (1974) investigated the effectiveness of platform motion using three conditions of motion cueing (i.e., no motion, sustained motion cueing, and washout motion cueing). This study also showed an increase in pilot performance in the simulator when motion cueing was present.

The evidence supporting the positive effects of high fidelity motion platforms is not unchallenged. Demaree, Norman, and Matheny (1965) concluded that in many instances the level of motion fidelity could be reduced without any appreciable performance decrement on tracking tasks. Huddleston (1966) reported that motion may not be necessary for those tasks performed in the more stable flight regimes, although it may be beneficial in highly dynamic regimes. Finally, the study conducted by Jacobs and Roscoe (1975) highlighted a vital issue. Roscoe found that pilot performance, in terms of errors committed, improved in the simulator with the presence of a type of motion, either *normal* washout or *random* washout. The critical point was that the random washout condition provided essentially appropriate onset cueing, but random directional cueing.

Recent development in visual system technology have dramatically increased the amount and quality of visual information displayed to the pilot. One important aspect of visual display that has received considerable research is the FOV required to successfully perform certain tasks in the simulator. Roscoe (1951) ascertained that pilots were able to land safely with a very limited FOV ($\pm 10^\circ$ horizontal and vertical). However, he also concluded that increasing the FOV improved pilot performance on the landing task. Armstrong (1970) examined landing performance of military pilots under a restricted ($\pm 25^\circ$) horizontal display, vertical FOV being unlimited, and discovered that pilot performance was nearly unchanged with this loss in peripheral vision cueing. Reeder and Kolnick (1964) reported similar results. Wolff (1971), using these findings, suggested that a 60° horizontal display was usually adequate for most piloting tasks requiring visual cueing.

The majority of research on the interactive effects of motion and visual cues deals with visually induced motion (Young, Dichgans, Murphy, & Brandt, 1973; Young, Oman, Curry, & Dichgans, 1973). Associated with this phenomenon is the problem of disorientation and simulator sickness thought to be caused by conflicting cues; i.e., a moving visual display accompanied by a stationary cockpit. Although such psychophysiological effects have been studied rather extensively, there is a lack of information relating to the relative contributions of the interactions of various visual displays and motion configurations to pilot performance.

It should be noted that the research findings reviewed are extremely subject, task, and vehicle specific. For example, the visual/motion cues required to simulate an air combat engagement in an F-15 aircraft undoubtedly differ greatly from those required for a straight-in approach and landing in a T-37 aircraft. Further, these studies were concerned with pilot performance in the simulator, which may or may not be related to the training effectiveness of the simulators. Considerations of this type usually place stringent limitations on the generalizations that may be made from a study. The present study is no exception to this rule, and its findings are subject to the same *caveats*.

II. METHOD

A rather complex experiment was required in order to achieve the purposes of the study. This

resulted because the first and third objectives (i.e., investigation of multifactor experimental space and use of a highly economical design) were difficult to combine in one package. The design that satisfied these objectives became the driving element that determined the methods and procedures.

Subjects

Three experienced pilots were selected as subjects in order to remove the confounding effect of learning from the performance scores. The subjects were T-37 instructor pilots (IP) at Williams Air Force Base, Arizona, whose flying time ranged from 550 to 900 hours.

Apparatus

The ASPT located at AFHRL/FT was used for the duration of the study.

The following description of ASPT briefly delineates those capabilities of ASPT used in this experiment. In-depth technical references are found in Bell (1974); Hagin and Smith (1974); and Rust (1975).

ASPT has two fully instrumented T-37 cockpits mounted upon six DOF motion platforms. The synergistic motion system has six active drive legs with approximately three feet of vertical travel and four feet of horizontal travel. Displacement capabilities include: pitch -20 degrees to $+30$ degrees; roll ± 22 degrees; and yaw ± 32 degrees. These displacements are intended to provide initial (on-set) cues for all maneuvers. The 31-bellow pneumatic G-seat in ASPT is designed to provide more continuous cues than the motion platform and accomplishes this by the orderly inflation and deflation of the bellows in response to the requirements of each particular maneuver.

The visual system of ASPT is comprised of seven 36-inch monochromatic cathode ray tubes (CRT) placed around the cockpit giving the pilot $+110$ degrees to -40 -degrees vertical cueing and ± 150 degrees of horizontal cueing. The computer generated visual scene has the capability to display information for most pertinent ground references (mountains, runways, hangars, etc.) within a 100 square nautical mile area of Williams AFB. As the T-37 moves through this environment, the visual imagery is updated 30 times per second such that the presentations are similar to what a pilot would see in the real world.

Automated performance measures are collected and stored at an iteration rate of 3.75 to 15 times per second

The computer system also possesses a Cognitronics voice capability for ground-controlled approaches (GCA). All systems of ASPT (motion, visual, etc.) can be degraded to match a wide variety of environmental conditions or aerodynamic characteristics.

Design

One of the principal considerations of any projected research is that of economy of resources. There are practical limitations to the number of individuals chosen to participate, the number of observations selected, the amount of time available to gather the information, and most critically, the expenses incurred. Generally, two approaches have been used to circumvent this problem: methodically developing a research strategy; or statistically controlling the experimental design. Under the second approach, countless methods have been developed to achieve economy in the collection and analysis of information ranging from the traditional one-way analysis of variance to the fairly recent response surface designs. Simon (1973) has written extensively on the use of screening studies for achieving a maximum amount of information with a minimum expenditure of effort in terms of time, sample size, and equipment usage. Simon proposed the use of multilevel, multivariable designs whereby analysis provides an economical "map" of the significant experimental space. This "map" is then used to guide more thorough research in the area. The design used in this study followed the "mapping" approach.

Two separate experimental designs were utilized. The first design, structured to evaluate main, first-order interaction and second-order interaction effects of all six independent variables was configured as a $3^3 \cdot 2^3$ randomized block partially confounded factorial.

The six independent variables, three with two levels each (ceiling/visibility, field of view, G-seat) and three with three levels each (winds, turbulence, motion), generated 216 unique treatment combinations. Using randomization, each of the three subjects was assigned a block of 72 treatment combinations under which they flew takeoffs, GCAs, and 360 degree overhead patterns. Each of the three pilots flew one-third of all possible treatment combinations, reducing total cell numbers from 216 to 72 per subject

The second design, a 3^4 randomized block partially confounded factorial, used four independent variables (turbulence, motion, field of view, G-seat) each with three levels which generated 81 unique treatment combinations. Field of view (FOV) and G-seat were modified from their two-level configuration in the $3^3 2^3$ design to three-level variables in the 3^4 design. Each of the three subjects flew aileron rolls and slow flights under 27 of the 81 conditions.

In both designs, the confounding occurred in the third order and higher order interactions. These interactions were hypothesized to contribute little to the experimental variance and were thus deemed to be of slight interest. To increase statistical power, these confounded interactions were added into the error terms.

Independent Variables

Six independent variables (IV) were employed in the first design. These were selected so that the subjects performed the designated maneuvers across a wide variety of environmental conditions and simulator configurations.

Three IVs (wind, turbulence, and ceiling/visibility) dealt with environmental conditions. Three levels of the wind variable were selected: zero, 12, or 24 knots all generated from 60 degrees left of the runway centerline. The turbulence variable was composed of no turbulence, light, or moderate turbulence conditions. The ceiling/visibility (C/V) variable had two levels: clear and minimums. The minimums were defined as 200 feet ceiling and $\frac{1}{2}$ mile visibility (200 feet/ $\frac{1}{2}$ mile) for the GCA maneuver and 1200 feet/3 miles for the 360 degree overhead pattern maneuver, and represented real-world minimum allowable conditions for those maneuvers. These three IVs yielded 18 unique environmental conditions ranging from no wind, no turbulence, and clear C/V to 24 knots crosswind, moderate turbulence, and clear C/V to 24 knots crosswind, moderate turbulence and minimum C/V.

Three IVs dealt with the configuration of ASPT. Zero, three and six DOF levels were selected for the motion variable. The three DOF condition included motion only in pitch, roll, and heave (vertical translation) dimensions. The six DOF condition consisted of motion in pitch, roll, yaw, longitudinal, vertical, and lateral displacement. The FOV variable had two conditions: masked and full. The full condition utilized all

seven cathode ray tube (CRT) channels. The masked FOV, designed to represent the FOV of many small visual displays currently in use, had a 36-degree vertical and 48-degree horizontal FOV. The 36 degree by 48 degree masked FOV was created by shutting down five of the seven CRTs and placing a portable black cardboard mask over portions of the two remaining CRTs to reduce the FOV to 36 degrees by 48 degrees. The G-seat variable possessed two levels: functional or non-functional.

The combination of environmental and ASPT configuration IVs (18×12) produced 216 unique treatment cells.

The second design used four IVs, each having three levels (3^4). Two of the four variables used in this design, motion and turbulence, were configured exactly as above. The third variable, FOV, had masked and full FOVs as in the first design, but added a third level in which there was no visual scene present in order to simulate a completely instrument flight rules (IFR) condition. The fourth variable, G-seat, similarly was either functional or non-functional as in the first design, but added a third level which directed that only the G-seat's pan was functional. The Seat Pan Only configuration made use of only those pneumatic panels located in the area of the pilot's buttocks in order to estimate the separate contributions of these panels.

These combinations of environmental and ASPT configuration IVs produced 81 unique treatment cells.

Flight Tasks

In this study, the term "flight tasks" refers to the five specific maneuvers flown by the subjects. These maneuvers were selected to encompass a broad spectrum of representative subtasks in the undergraduate pilot training (UPT) curriculum (Meyer, Laveson, Weissman, & Eddowes, 1974).

In the first design, each subject flew 72 take-offs, 72 GCAs, and 72 360-degree overhead patterns for a total of 216 maneuvers (under the varying environmental/system configurations) per subject. In the second portion of the experiment, each subject flew 27 aileron rolls and 27 slow flights for a total of 54 maneuvers (under the various configurations) per subject.

Dependent Variables

The dependent variables used in this study were derived from the ASPT Automated Performance

Measurement System (APMS). The APMS is basically a criterion-referenced approach to measurement. Because most skillful piloting involves the attempt to maintain or change to specified flight parameter criteria (e.g., airspeed, altitude, vertical velocity), deviations from these desired parameters provides a method of quantitative objective performance measurement.

For this study, sets of dependent variables believed to be of relevance were selected independently for each maneuver and were recorded via the APMS at an iteration rate between 3.75 and 15 times per second. The variables monitored are listed in Appendix A. These dependent variables were classified into three categories: (a) system output measures, (b) pilot input measures, and (c) derived measures.

System output measures were used to measure deviations from desired criteria via root mean square techniques (Waag, Eddowes, & Fuller, 1974), which have been demonstrated to be reliable discriminators of pilot performance.

Pilot input measures were computed to determine an analog to how much effort or work was expended by the pilot on the aircraft controls during the maneuver. It has been generally accepted that pilots with more experience make fewer, more precise correctional movements than relatively inexperienced pilots. This analog was measured for aileron, elevator, and rudder control. This analog of pilot effort was computed as work per unit of time and was expressed by the following equation:

$$\text{Pilot Input} = r/n \sum_{i=1}^n |P_i - P_{i-1}| \times \frac{|f_i + f_{i-1}|}{2}$$

where r is the sampling rate, n is total number of samples, P is control position, and f is control force.

The derived measures were a set of measures that produce a single composite score for a particular segment of a maneuver or a complete maneuver. For the most part, this score was based on the pilot's proficiency in simultaneously staying within several tolerance bands constructed around the desired criteria. The score was a percent-time-within-tolerance measure. Tolerance bands were constructed using the performance of experienced pilots for each maneuver or maneuver segment as a basis.

This approach to performance measurement was implemented through use of the ASPT Pre-programming System. This system permitted generation of FORTRAN programs, called exercise segments, which used simulator flight variables as input data. (For a complete description of the five exercise segments, see Appendix A).

Table 1 lists all dependent variables by maneuver. Because system measures used deviation scores, a smaller score indicated better performance. Similarly, on pilot input scores, smaller forces applied by the pilot to remain within the established tolerances produced smaller scores, indicative of better performance. The derived measures, however, were based on percent-time-within-tolerance scale with 100% being defined as remaining within the given tolerance bands for the entire duration of observation. Thus, higher percentages indicate better scores.

Procedures

The procedures used in the study can conveniently be separated into two classes: subject pretraining, and data collection procedures.

1. *Subject pretraining.* Each subject was given approximately 3.5 hours in ASPT for the purpose of familiarization and warmup one to two days before the start of the study. During this time, two separate mission profiles with varying environmental conditions were briefed to and practiced by the subjects.

PROFILE I (3³ 2³ Design Maneuvers)

- Takeoff and climb on course (began at takeoff clearance).
- GCA (began at five miles from touchdown gate).
- VFR "overhead" traffic pattern (began on initial).

PROFILE II (3⁴ Design Maneuvers)

- Slow flight (initialized at 100 kts, 12 K ft).
- Aileron roll (initialized at 160 kts, 15K ft).

2. *Data Collection Procedures.* In the course of the study, each subject flew Profile I 72 times and Profile II 27 times as required by the experimental design. On the average, Profile I required 19 minutes for completion and Profile II required 6 minutes. The two profiles were randomly ordered for all subjects. The mission profiles were

Table 1. Dependent Variable Listing

Dependent Variable Name		Type	Units
Takeoff and Climb on Course			
1. Heading Deviation		System	Degrees
2. Pitch Deviation		System	Degrees
3. Course Deviation		System	Degrees
4. Airspeed Deviation		System	Knots
5. Elevator Power		Pilot	lbs-deg/sec
6. Aileron Power		Pilot	lbs-deg/sec
7. Rudder Power		Pilot	lbs-deg/sec
GCA and Landing			
1. Total Score		Derived	Percent
2. Touchdown Score		Derived	Percent
3. Altitude Deviation		System	Feet
4. Airspeed Deviation		System	Knots
5. Centerline Deviation		System	Feet
6. Glidepath Deviation		System	Feet
7. Elevator Power		Pilot	lbs-deg/sec
8. Aileron Power		Pilot	lbs-deg/sec
9. Rudder Power		Pilot	lbs-deg/sec
10. Elevator Power		Pilot	lbs-deg/sec
11. Aileron Power		Pilot	lbs-deg/sec
12. Rudder Power		Pilot	lbs-deg/sec
360° Overhead Pattern and Landing			
1. Pitchout Altitude		System	Feet
2. Pitchout Bank		System	Degrees
3. Elevator Power		Pilot	lbs-deg/sec
4. Aileron Power		Pilot	lbs-deg/sec
5. Rudder Power		Pilot	lbs-deg/sec
6. Downwind Altitude Deviation		System	Feet
7. Downwind Score		Derived	Percent
8. Elevator Power		Pilot	lbs-deg/sec
9. Aileron Power		Pilot	lbs-deg/sec
10. Rudder Power		Pilot	lbs-deg/sec
11. Final Turn Bank Deviation		System	Degrees
12. Final Turn Airspeed Deviation		System	Knots
13. Elevator Power		Pilot	lbs-deg/sec
14. Aileron Power		Pilot	lbs-deg/sec
15. Rudder Power		Pilot	lbs-deg/sec
16. Glidepath Deviation		System	Feet
17. Centerline Deviation		System	Feet
18. Final Airspeed Deviation		System	Knots
19. Final Score		Derived	Percent
20. Elevator Power		Pilot	lbs-deg/sec
21. Aileron Power		Pilot	lbs-deg/sec
22. Rudder Power		Pilot	lbs-deg/sec
23. Landing Score		Derived	Percent
Slow Flight			
1. Altitude Deviation		System	Feet
2. Airspeed Deviation		System	Knots
3. Slip Indicator Deviation		System	Degrees
4. Total Score		Derived	Percent
5. Elevator Power		Pilot	lbs-deg/sec
6. Aileron Power		Pilot	lbs-deg/sec
7. Rudder Power		Pilot	lbs-deg/sec
Aileron Roll			
1. Bank in Deviation		System	Degrees
2. Roll Acceleration		System	Degrees/Sec ²
3. Roll Score		Derived	Percent
4. Bank Out Deviation		System	Degrees
5. Aileron Power (In)		Pilot	lbs-deg/sec
6. Aileron Power (Roll)		Pilot	lbs-deg/sec
7. Aileron Power (Out)		Pilot	lbs-deg/sec
8. Total Score		Derived	Percent

flown consecutively within a data collection period, which varied from one to two hours in length dependent upon ASPT system availability. Rest periods were provided whenever requested by the subject IPs.

After the pilot strapped into the cockpit, each session was begun with instructions provided by the Cognitronics computer-driven word generator. During strap-in, the console operator entered identification information into the APMS files, modified the simulator configuration, and set the environmental factors. Each maneuver was begun on command and completed when selected criteria were satisfied; i.e., the takeoff and climb on course was terminated when the altitude equalled 3,000 feet mean sea level (MSL). An aural tone signified termination of the maneuver. In the case of the GCA, the Cognitronics generator provided all verbal information to the subject, including glide-slope and centerline deviations. At the completion of each maneuver within the profile, the console operator entered comments on any system malfunctions, operator or subject error experienced during the maneuver.

All profiles were flown in cockpit A of the ASPT to control for possible inter-cockpit differences.

In setting up those treatment conditions which required the motion system to be inoperative, the console operator initially raised the platform and then froze it in an attempt to preclude subject awareness of the simulator configuration. During the course of the study, however, the subjects became "experiment wise" and were often able to discern the exact configuration.

Prior to the execution of each maneuver, all environmental conditions, (i.e., ceiling/visibility, winds, turbulence) were given to the pilots as they would be in the real-world of flying.

Due to a hardware configuration error in the method of setting the particular G-seat configuration, each IP had to refly 18 profiles, resulting in a total of 117 profiles flown per subject.

The major constraint in subject scheduling was ASPT system availability. Subjects were scheduled on a day-to-day basis. Data collection began on 25 June 75 and was terminated on 30 October 75. System reliability during the conduct of the study was approximately 62 percent, as measured by the following ratio: hours of successful data collection/hours scheduled for the effort.

Analysis

The analysis presented in this technical report differs significantly from that given in a previous one (Waters, Grunzke, Irish, & Fuller, 1976). The earlier report was based on a univariate analysis of each dependent variable. The present report utilized a multivariate approach.

In recognition of the intercorrelations between the dependent variables of each specific maneuver measurement set (Waters et al., 1976), a multivariate analysis of variance (MANOVA) was selected as the appropriate omnibus test (Harris, 1975). A MANOVA was performed for each maneuver which resulted in five overall tests of significance. The statistic used in determining significance of effects was the Wilks Lambda (λ). The Wilks Lambda statistic, while not only being less difficult to compute than the greatest characteristic root (GCR) method, also provided a more powerful test than the latter (with the assumption of nearly equivalent characteristic roots). Upon reaching significance, traditional step-down univariate F's were computed for each dependent variable. Means and exact probability levels $p(F > F_0)$ were also computed for each dependent measure. The alpha level for this study was set at .05.

Additional multivariate post hoc tests were not pursued for two reasons. First, the Wilks Lambda does not lend itself to further multivariate contrasts; and second, the sample size employed was not sufficient for extensive multivariate comparison using a multiple discriminant or principal components analysis.

Although the step-down F's are subject to similar inflation of the Type I error rate as are a series of conventional univariate ANOVAs (Harris, 1975), a screening study of this type would prefer minor inflation in Type I rather than Type II error rates in order that all possible sources of variance may be identified for future studies. Additionally, percent of non-error variances (% NEV) were computed for each source of variance so that the relative importance of each effect could be estimated.

The matrices used to construct the MANOVA tables were structured such that all main effects, first order interaction effects and second order interaction effects were orthogonal to one another in the $3^3 2^3$ design with the exception of the Wind by Turbulence by Motion interaction which had

two of its degrees of freedom confounded with between block variation. All third order and higher interactions were assumed to be negligible. The 3^4 design was structured so that all main effects and first order interactions were orthogonal, with second order and higher order interactions assumed to be zero.

The final statistical procedure performed upon the data consisted of rank ordering the performance of each dependent measure for those interactions of statistical significance. Because the dependent variables varied greatly in the nature of their units and the direction of best performance in terms of their absolute values, a procedure was required which accounted for these differences. The selected method included the rank ordering of performance on the dependent measures from best to worst performance within every treatment cell of the interaction. The ranks were then summed across all dependent measures for each cell and an average rank was determined. Nemenyis' test (Kirk, 1968) was employed to determine the location of significant differences between the average ratings in the treatment cells. This method allowed the dependent measures to be summed into an unweighted linear combination, thus providing insight into the relative strength and direction of the performance measurement sets within each interaction. Since it was impossible to empirically determine what the individual variable weights should have been, this procedure used *equivalent* weights for all variables. Although this method varied somewhat from a more traditional approach, it offered a straight-forward and relatively economical method of describing the underlying processes at work within each interaction.

III. RESULTS

Because of the sizeable quantity of information this study produced, the results section is structured in the following manner. Initially reported are the main effects which reached significance. These effects are classified into two categories: environmental variables, and system configuration variables. Presentation of the significant first order interactions follows; these

were subdivided into three major classes. These classes are: interactions of environmental variables with environmental variables, interactions of system variables with environmental variables, and system variable by system variable interactions. Finally, the one second-order (three variable) interaction which reached significance was reported. This scheme was followed in reporting the results of the $3^3 2^3$ design, and then repeated for the 3^4 design.¹

$3^3 2^3$ Environmental Variables

Wind. The first environmental main effect considered was the wind factor. The wind main effect, as expected, evidenced consistent linear effects. As wind velocity increased, flying performance decreased. Table 2 depicts the means, univariate F's and the Wilks Lambda for the wind matrix for the takeoff, GCA, and overhead pattern maneuvers.

The wind effect was significant in the omnibus multivariate test across each of the three maneuvers measures ($p < .001$). The direction of significance as indicated by the tabled means shows that under increasingly windy conditions, deviations from the desired course were greater and that more subject effort was needed to fly the simulator.

For the univariate analyses, of the seven variables in the matrix for the takeoff maneuver, three (heading deviation, aileron power and rudder power) were significant at the univariate level ($p < .001$) and had relatively consistent effects; i.e., increased wind intensity produced more course deviation and effort.

The GCA landing task showed five dependent variables with significant univariate F ratios ($p < .001$). Four of these measures (rudder power (final), aileron power, elevator power, rudder power (landing)) were pilot input measures and one derived measure (touchdown score) demonstrated linear effects. Of the remaining three variables (rudder power (2), and aileron power) curvilinear effects were manifested. The last measure, elevator power (landing phase) showed best performance, assuming that fewer and smaller corrections indicated better flying, under the maximum wind condition followed by no wind and lastly 12 knots of wind. This was likely a maneuver-specific artifact due to its inconsistency with all of the other measures.

In the overhead pattern maneuver, 12 of 23 dependent variables were significant at $p < .05$ in the univariate analysis. These 12 dependent variables included four system output dependent

¹ The disparity between the multivariate and univariate source tables for the main and interaction effects stems from the method in which the DOF have been partitioned in the two analyses. Both analyses are correct, however, the univariate tests give a more conservative, more powerful test of significance.

Table 2. Wind Main Effects Across Takeoff, GCA, and Overhead Pattern Maneuvers

Source	$\bar{X}(0 \text{ Knots})$	$\bar{X}(12 \text{ Knots})$	$\bar{X}(24 \text{ Knots})$	SSBET	SSW/IN	F	P
Takeoff							
Heading Deviation	2.10	2.66	5.39	448	225	2.11	.000*
Pitch Deviation	1.71	1.89	1.89	1.57	115	1.45	.236
Course Deviation	.926	1.10	1.30	5.05	216	2.49	.086
Airspeed Deviation	5.55	4.66	5.01	29.0	3550	.871	.420
Elevator Power	2.45	2.54	2.67	1.63	113	1.53	.219
Aileron Power	.606	.766	.977	5.00	53.5	9.94	.000*
Rudder Power	.279	.468	.519	2.42	23.3	11.07	.000*
Wilks Lambda			df ₁	df ₂		p(F>F ₀)	
.278			14	414		.000*	
GCA							
Total Score	25.7	23.5	25.1	182	26100	.744	.476
Touchdown Score	87.3	84.2	79.2	2400	28700	8.89	.000*
Altitude Deviation	40.9	39.8	38.1	289	91700	.335	.715
Airspeed Deviation	2.44	2.47	2.86	8.10	350	2.46	.087
Centerline Deviation	96.0	103	106	3900	28200	1.47	.232
Glidepath Deviation	38.4	35.9	33.6	837	42600	2.09	.126
Elevator Power	.436	.463	.447	.027	12.3	.231	.794
Aileron Power	.419	.516	.457	.350	.300	1.24	.291
Rudder Power	.067	.098	.168	.397	4.76	8.87	.000*
Elevator Power	4.28	4.91	3.40	83.1	1300	6.82	.001*
Aileron Power	1.04	2.03	1.96	44.0	363	12.9	.000*
Rudder Power	1.72	5.89	17.0	8960	9120	104	.000*
Wilks Lambda			df ₁	df ₂		p(F>F ₀)	
.349			24	404		.000*	
Overhead Pattern							
Pitchout Altitude Deviation	40.8	41.7	42.8	145	172,000	.090	.914
Pitchout Bank Deviation	6.25	10.9	14.9	2680	4,090	69.9	.000*
Elevator Power	2.46	1.81	1.40	41.4	324	13.6	.000*
Aileron Power	.688	.537	.393	3.13	39.7	8.41	.000*
Rudder Power	.049	.078	.089	.064	9.74	.698	.499
Downwind Alt Dev	42.3	36.2	42.0	1710	122,000	1.49	.227
Downwind Score	66.8	71.2	62.0	3060	134,000	2.43	.090
Elevator Power	2.24	2.10	1.91	3.86	301	1.36	.258
Aileron Power	1.31	1.23	1.11	1.51	220	.732	.482
Rudder Power	.106	.101	.093	.006	7.06	.094	.910
Final Turn Bank Dev	9.55	10.9	11.2	109	5130	2.25	.107
Final Turn Airspeed Deviation	4.42	4.58	8.51	772	2370	34.6	.000*
Elevation Power	1.22	1.59	2.08	26.7	251	11.3	.000*
Aileron Power	.739	.751	.932	1.67	51.9	3.43	.034*
Rudder Power	.287	.378	.600	3.73	116	3.43	.034*
Glidepath Deviation	.875	1.28	1.30	8.25	285	3.08	.047*
Centerline Deviation	92.4	159	155	170,000	1,350,000	1.33	.264
Final Airspeed Deviation	3.79	3.92	6.69	388	3020	13.7	.000*
Final Score	12.2	15.1	3.50	5270	73,600	7.63	.000*
Elevator Power	2.71	3.07	3.29	12.5	548	2.42	.091
Aileron Power	1.29	1.81	2.76	80.8	276	31.2	.000*
Rudder Power	1.16	4.07	6.74	1120	2060	58.2	.000*
Landing Score	77.4	76.2	75.9	85.9	23,700	.385	.680
Wilks Lambda		df ₁	df ₂		p(F>F ₀)		
.224		46	382		.000*		

Note. — All univariate F-ratios evaluated at F_{2, 213}.

* p < .05.

variables, seven pilot input dependent variables, and one derived dependent measure. Of these variables which exceeded the significance criterion, three (elevator power (pitchout), aileron power (pitchout), and final score) indicated better performance under increased wind conditions. The final score measure demonstrated slightly curvilinear effects by showing best performance in the 12 knot condition, slightly deteriorated performance with no wind followed by a marked decrease in performance in the 24 knot condition. The remaining nine dependent variables indicated decreased performance as a function of increased wind conditions.

Turbulence. The analyses of the second environmental variable, turbulence, are presented in Table 3.

The turbulence variable demonstrated an overall multivariate effect only on the GCA landing maneuver ($p < .001$).

In the univariate analysis, the takeoff maneuver produced one dependent variable (elevator power) that reached significance. This measure manifested a clear linear effect; i.e., best performance was recorded under no turbulence followed in sequence by light and moderate turbulence. Rudder power was the only dependent measure to achieve significance in the overhead pattern univariate analysis.

Ceiling/Visibility. The analyses of the final environmental variable, ceiling/visibility, are listed in Table 4 for the takeoff, GCA, and overhead pattern maneuvers.

As Table 4 shows, all three maneuvers had significant multivariate ceiling/visibility main effects ($p < .03$).

Under the univariate analysis, all dependent variables for the takeoff, excluding rudder power, had means in the expected direction (i.e., with restricted visibility conditions (minimums) performance deteriorated). The effects of reduced ceiling/visibility were particularly apparent on variables related to heading, airspeed, and amount of elevator power used ($p < .05$).

The GCA maneuver analysis has similar but not quite as powerful results. Of the 12 variables measured, six variables (two significant) suggested improved performance in the clear conditions while three variables demonstrated virtually no change under either condition. The remaining three variables suggested superior performance in the minimums condition. Nevertheless, the overall multivariate test, as previously mentioned,

indicated improved subject performance in the same direction as the majority of the individual dependent variables.

Ten of the twenty-three measures used in the analysis of the overhead pattern, reached significance in the ceiling/visibility univariate contrasts. All ten measures demonstrated superior performance was evidenced under the clear C/V condition. These measures cover the full range of system output, pilot input and derived scores.

3³ 2³ System Variables

The system variables consisted of platform motion, field of view, and G-seat.

Motion. The results of the analyses of the first variable of interest, platform motion, are displayed in Table 5.

Significance was reached on the multivariate test for all three maneuvers ($p < .001$).

In the takeoff maneuver, the univariate analysis of four of the seven dependent measures (three of which were system output measures) indicated superior performance in the absence of motion; however, review of the three DOF and six DOF motion conditions gave highly inconsistent results, thereby negating the establishment of a performance hierarchy.

The GCA maneuver showed a more consistent pattern of results. Of the 12 dependent variables measured in the GCA, eight measures (five significant) demonstrated superior performance in the absence of motion. The remaining dependent measures indicated superior performance under the three DOF when compared to the six DOF motion condition.

Similarly, the overhead pattern evidenced performance trends consisting of improved performance without motion followed by inferior performance with three DOF and six DOF motion.

Field of View. The analysis of the FOV main effect is listed in Table 6 for the takeoff, GCA, and overhead pattern maneuvers.

As shown in Table 6, none of the multivariate omnibus tests were significant at $p < .05$.

In the univariate analysis, the variables measured in the takeoff maneuver consistently pointed towards better performance under the full FOV. A majority of the dependent measures in the GCA, also suggested improved performance under the full FOV although less strongly than did the takeoff maneuver. The overhead pattern produced

Table 3. Turbulence Main Effects Across Takeoff, GCA, and Overhead Pattern Maneuvers

Source	\bar{X} (None)	\bar{X} (Light)	\bar{X} (Moderate)	SSBET	SSW/IN	F	p
Takeoff							
Heading Deviation	3.32	3.46	3.39	.710	672	.112	.894
Pitch Deviation	1.92	1.86	1.71	1.61	115	1.49	.226
Course Deviation	1.01	1.24	1.08	2.11	.219	1.03	.361
Airspeed Deviation	4.81	5.06	5.34	10.2	3570	.305	.737
Elevator Power	2.39	2.60	2.67	3.19	112	3.05	.050*
Aileron Power	.698	.816	.836	.795	57.8	1.47	.233
Rudder Power	.374	.402	.485	.484	25.2	2.04	.132
Wilks Lambda	df ₁		df ₂			p(F>F ₀)	
.922	14		414			.2576	
GCA							
Total Score	26.5	22.7	25.1	506	25,800	2.09	.126
Touchdown Score	82.5	82.6	85.7	503	30,600	1.75	.177
Altitude Deviation	34.6	40.3	43.9	3,170	88,800	3.80	.024*
Airspeed Deviation	2.02	2.62	3.13	43.9	314	14.8	.000*
Centerline Deviation	102	105	98.7	1,310	285,000	.491	.612
Glidepath Deviation	33.9	36.5	37.4	472	42,900	1.17	.311
Elevator Power	.351	.452	.543	1.34	11.0	12.9	.000*
Aileron Power	.383	.477	.533	.822	29.6	2.96	.054
Rudder Power	.070	.109	.147	.213	4.95	4.59	.011*
Elevator Power	3.82	4.03	4.75	34.2	1,350	2.71	.069
Aileron Power	1.76	1.58	1.68	1.24	406	.325	.723
Rudder Power	8.03	7.43	9.12	106	18,000	.627	.535
Wilks Lambda	df ₁		df ₂			p(F>F ₀)	
.708	24		404			.000*	
Overhead Pattern							
Pitchout Altitude Deviation	41.5	45.0	38.8	1,380	171,000	.861	.424
Pitchout Bank Deviation	10.6	11.1	10.3	23.5	6,750	.371	.690
Elevator Power	1.77	2.00	1.88	1.90	363	.556	.575
Aileron Power	.527	.543	.547	.016	42.8	.039	.962
Rudder Power	.041	.095	.081	.116	9.69	1.27	.282
Downwind Altitude Deviation	37.4	38.8	44.3	1,920	122,000	1.67	.190
Downwind Score	71.5	66.3	66.2	3,080	134,000	2.45	.088
Elevator Power	1.96	2.07	2.22	2.56	303	.899	.408
Aileron Power	1.16	1.28	1.21	.545	221	.262	.770
Rudder Power	.041	.115	.144	.402	6.66	6.42	.002*
Final Turn Bank Deviation	11.0	10.5	10.1	26.1	5,210	.534	.587
Final Turn Airspeed Dev	5.56	5.99	5.96	8.49	3,130	.289	.750
Elevator Power	1.52	1.67	1.70	1.39	276	.535	.586
Aileron Power	.738	.838	.846	.521	53.0	1.05	.352
Rudder Power	.367	.449	.449	.329	119	.294	.745
Glidepath Deviation	1.05	1.28	1.12	1.88	291	.087	.504
Centerline Deviation	141	138	116	27,000	13,600,000	.211	.810
Final Airspeed Deviation	4.54	4.18	5.67	87.4	3,320	2.80	.063
Final Score	11.1	9.46	10.2	103	78,800	.139	.870
Elevator Power	2.89	3.00	3.17	2.85	558	.544	.581
Aileron Power	1.93	1.88	2.05	1.15	355	.346	.708
Rudder Power	3.36	3.85	4.78	75.4	3,110	2.58	.077
Landing Score	76.4	75.3	77.6	193	23,600	.869	.421
Wilks Lambda	df ₁		df ₂			p(F>F ₀)	
.755	46		382			.133	

Note. — All univariate F ratios evaluated at F_{2,113}.

*p < .05

Table 4. Ceiling/Visibility Main Effects Across Takeoff, GCA, and Overhead Maneuvers

Source	\bar{x} (clear)	\bar{x} (minimums)	SSBET	SSW/IN	F	p
Takeoff						
Heading Deviation	3.01	3.77	30.9	642	10.3	.002*
Pitch Deviation	1.79	1.87	.350	116	.646	.423
Course Deviation	1.07	1.15	.388	221	.376	.541
Airspeed Deviation	3.68	6.46	.419	3160	28.4	.000*
Elevator Power	2.45	2.65	2.18	113	4.14	.043*
Aileron Power	.720	.847	.873	57.7	3.24	.073
Rudder Power	.430	.411	.018	25.7	.153	.696
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.840	7	208	.000*			
GCA						
Total Score	26.9	22.6	1020	25200	8.66	.004*
Touchdown Score	84.9	82.2	390	30700	2.72	.101
Altitude Deviation	40.4	38.8	146	91800	.340	.561
Airspeed Deviation	2.59	2.59	.003	358	.002	.962
Centerline Deviation	95.0	108	9520	277000	7.36	.008*
Glidepath Deviation	34.7	37.2	358	43000	1.78	.184
Elevator Power	.429	.469	.087	12.2	1.53	.218
Aileron Power	.464	.464	.003	30.4	.000	.988
Rudder Power	.108	.109	.000	5.16	.000	.986
Elevator Power	4.28	4.11	1.51	1380	.234	.629
Aileron Power	1.54	1.81	3.74	404	1.98	.161
Rudder Power	8.22	8.17	.129	18100	.002	.969
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.896	12	203	.029*			
Overhead Pattern						
Pitchout Altitude Deviation	36.3	47.3	6,540	166,600	8.43	.004*
Pitchout Bank Deviation	11.4	9.95	117	6,650	3.75	.054
Elevator Power	1.81	1.97	1.40	364	.823	.365
Aileron Power	.475	.603	.886	41.9	4.52	.035*
Rudder Power	.083	.062	.024	9.78	.524	.469
Downwind Altitude Deviation	35.8	44.6	4,150	119,000	7.43	.007*
Downwind Score	70.4	62.9	3,020	134,000	4.82	.029*
Elevator Power	1.71	2.46	30.2	275	23.47	.000*
Aileron Power	1.07	1.36	4.46	217	4.40	.037*
Rudder Power	.106	.094	.008	7.06	.239	.626
Final Turn Bank Deviation	9.83	11.20	108	5,130	4.49	.035*
Airspeed Deviation	5.07	6.60	126	3,020	8.93	.003*
Elevator Power	1.47	1.79	5.61	272	4.41	.036*
Aileron Power	.745	.870	.852	52.7	3.46	.064
Rudder Power	.515	.328	1.90	117	3.45	.064
Glidepath Deviation	1.09	1.22	927	292	.678	.411
Centerline Deviation	110	154	107,000	13,600,000	1.68	.196
Final Airspeed Deviation	4.23	5.37	70.8	3,340	4.54	.034*
Final Score	12.7	7.87	1,250	77,700	3.45	.064
Elevator Power	2.86	3.18	5.50	555	2.12	.146
Aileron Power	1.77	2.14	7.58	3.49	4.65	.032*
Rudder Power	3.63	4.35	28.4	3,150	1.93	.168
Landing Score	77.1	75.8	87.2	23,700	.786	.376
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.754	23	192	.000*			

Note. — All univariate F's evaluated at $F_{1, 214}$

Table 5. Motion Main Effects Across Takeoff, GCA, and Overhead Pattern Maneuvers

Source	$\bar{x}(0 \text{ DOF})$	$\bar{x}(3 \text{ DOF})$	$\bar{x}(6 \text{ DOF})$	SSBET	SSW/IN	F	p
Takeoff							
Heading Deviation	3.33	3.42	3.41	.377	672	.060	.942
Pitch Deviation	1.70	1.96	1.83	2.39	114	2.24	.109
Course Deviation	1.30	1.03	1.00	3.83	218	1.87	.156
Airspeed Deviation	4.12	5.81	5.28	107	3,470	3.29	.039
Elevator Power	2.52	2.48	2.67	1.47	113	1.38	.254
Aileron Power	.582	.801	.967	5.38	53.2	10.77	.000*
Rudder Power	.487	.346	.428	.719	25.0	3.07	.048*
Wilks Lambda	df ₁			df ₂	p(F>F ₀)		
.823	14			414	.000*		
GCA							
Total Score	27.3	24.3	22.7	771	25,500	3.23	.042*
Touchdown Score	84.4	83.4	82.9	86.8	31,100	.298	.743
Altitude Deviation	33.2	41.2	44.3	4,720	87,300	5.76	.004*
Airspeed Deviation	2.40	2.44	2.92	12.0	346	3.70	.026*
Centerline Deviation	96.7	102	106	3,060	283,000	1.15	.319
Glidepath Deviation	36.3	35.6	36.0	19.6	43,400	.048	.953
Aileron Power	.379	.395	.572	1.66	10.7	16.6	.000*
Rudder Power	.276	.457	.660	5.31	25.1	22.5	.000*
Elevator Power	.091	.113	.123	.039	5.12	.806	.448
Aileron Power	4.29	3.70	4.61	30.9	1,350	2.44	.089
Rudder Power	1.53	1.43	2.06	16.9	390	4.61	.001*
Elevator Power	8.56	6.83	9.20	216	17,900	1.29	.278
Wilks Lambda	df ₁			df ₂	p(F>F ₀)		
.695	24			404	.000*		
Overhead Pattern							
Pitchout Altitude Deviation	36.9	40.6	47.8	4390	168000	2.78	.064
Pitchout Bank Deviation	10.1	11.2	10.8	39.5	6730	.625	.536
Elevator Power	2.16	1.72	1.79	8.16	357	2.43	.090
Aileron Power	.439	.513	.666	1.93	40.9	5.32	.007*
Rudder Power	.062	.069	.087	.024	9.78	.258	.773
Downwind Altitude Deviation	34.0	41.4	45.3	4750	119000	4.26	.015*
Downwind Score	70.2	65.5	64.2	1430	135000	1.12	.327
Elevator Power	2.22	1.74	23.0	13.0	292	4.74	.009*
Aileron Power	.895	1.17	15.8	17.0	205	8.85	.000*
Rudder Power	.098	.110	.092	.013	7.05	.191	.826
Final Turn Bank Deviation	9.95	10.6	11.0	43.9	5200	.899	.409
Final Turn Airspeed Deviation	5.68	6.14	5.69	9.74	3130	.331	.719
Elevator Power	1.55	1.47	1.88	6.59	271	2.59	.077
Aileron Power	.605	.830	.987	5.31	58.2	11.73	.000*
Rudder Power	.483	.418	.365	.504	119	.452	.637
Glidepath Deviation	1.14	1.12	1.20	.233	293	.085	.919
Centerline Deviation	128	134	134	1,810	13,700,000	.014	.986
Final Airspeed Deviation	4.88	4.73	4.79	.867	3140	.027	.973
Final Score	8.20	12.2	10.5	574	78300	.781	.459
Elevator Power	3.28	2.74	3.04	10.6	550	2.053	.131
Aileron Power	1.70	2.05	2.12	7.28	349	2.20	.111
Rudder Power	4.40	3.48	4.09	31.0	3150	1.05	.352
Landing Score	78.1	76.2	75.2	314	23500	1.42	.244
Wilks Lambda	df ₁			df ₂	p(F>F ₀)		
.657	46			382	.000*		

*p < .05.

All univariate F's evaluated at F_{2,213}.

Table 6. Field of View Main Effects Across Takeoffs, GCAs, and Overhead Pattern Maneuvers

Source	\bar{X} (masked)	\bar{X} (full)	SSBET	SSW/IN	F	p
Takeoff						
Heading Deviation	3.50	3.28	2.72	670	.869	.353
Pitch Attitude 1.8s	1.86	1.80	.150	116	.277	.599
Course Deviation	1.23	.993	2.96	219	2.90	.089
Airspeed Deviation	5.52	4.62	43.5	3,530	2.63	.106
Elevator Power	2.61	2.50	.615	114	1.152	.284
Rudder Power	.868	.698	.156	57.0	5.85	.016*
Airleron Power	.428	.413	.013	25.7	107	.744
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.949	7	203	.141			
GCA						
Total Score	25.1	24.5	18.7	26,200	.153	.696
Touchdown Score	83.0	84.2	88.5	31,000	.610	.436
Altitude Deviation	42.0	37.2	1,260	90,700	2.96	.086
Airspeed Deviation	27.1	24.6	3.35	355	2.02	.157
Centerline Deviation	99.4	104	1,150	285,000	.867	.353
Glidepath Deviation	34.8	37.1	298	43,100	1.48	.225
Elevator Power	.472	.425	.122	12.2	2.14	.145
Aileron Power	.530	.398	.938	29.4	6.82	.009*
Rudder Power	.102	.115	.008	5.15	.333	.564
Elevator Power	4.18	4.21	.061	1,380	.009	.922
Aileron Power	1.76	1.58	1.77	406	.934	.335
Rudder Power	8.72	7.67	60.4	18,000	.718	.398
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.922	12	203	.155			
Overhead Pattern						
Pitchout Altitude	44.1	39.4	1,200	171,000	1.50	.221
Pitchout Bank	11.0	10.4	23.0	6,750	.731	.394
Elevator Power	1.87	1.91	.081	365	.047	.828
Aileron Power	.595	.483	.681	42.1	3.46	.069
Rudder Power	.087	.058	.045	9.76	.977	.329
Downwind Attitude Deviation	41.1	39.3	164	123,000	.284	.595
Downwind Score	62.9	70.5	3,130	134,000	5.01	.026*
Elevator Power	2.13	2.04	.519	305	.364	.547
Aileron Power	1.34	1.09	3.16	218	3.09	.080
Rudder Power	.092	.108	.013	7.05	.397	.530
Final Turn Bank Deviation	11.5	9.62	181	5,060	7.67	.006*
Final Turn Airspeed Deviation	5.75	5.92	1.57	3,140	.107	.744
Elevator Power	1.65	1.62	.054	278	.042	.839
Aileron Power	.891	.724	1.51	52.0	6.19	.014*
Rudder Power	.404	.439	.064	119	.114	.735
Glidepath Deviation	1.26	1.04	2.67	291	1.97	.162
Centerline Deviation	165	99.1	233,000	1,340,000	3.71	.055
Final Airspeed Deviation	5.51	4.09	108	3,300	7.01	.009*
Final Score	9.24	11.3	233	78,700	.635	.426
Elevator Power	3.02	3.03	.006	560	.002	.962
Aileron Power	2.97	1.84	2.76	354	1.67	.198
Rudder Power	4.02	3.96	151	3,180	.010	.919
Landing Score	76.4	76.6	2.61	23,800	.023	.878
Wilks Lambda	df ₁	df ₂	P(F>F ₀)			
.843	23	192	.0572			

Note. — All Univariate F's evaluated at F_{1,214}

* p < .05.

few cases of significance in the univariate analysis. Eighteen of the 23 variables measured in the overhead pattern showed better, although not necessarily significantly better, performance under the full FOV.

G-Seat. The final system main effect evaluated was the G-seat. The data analyses on the G-seat variable are listed in Table 7.

The G-seat variable reached significance in the omnibus multivariate test for the takeoff and GCA maneuvers, but not for the overhead pattern.

Inspection of the univariate analysis data in Table 7 reveals three significant F ratios ($p < .05$) for the takeoff maneuver. Overall, three of the seven dependent measures show improved performance with the G-seat present.

The GCA maneuver produced two significant univariate F ratios, both of which indicated better performance with the G-seat on. Of the 12 variables in the matrix, although only these two were significant, seven of the 12 suggested improved performance under the G-seat on condition.

In the overhead pattern maneuver, 13 of 23 variables favored the G-seat condition; however, the effect was so small that overall performance was relatively unchanged as a function of G-seat conditions.

The maneuvers used in the second design were slow flight and aileron roll. The independent variables manipulated in the performance of these tasks were turbulence, platform motion, FOV, and G-seat.

3⁴ Environmental Variable. Table 8 lists the means, sums of squares, univariate F-statistics, and associated probability levels for the single environmental variable (turbulence) investigated in the slow flight and aileron roll maneuvers. As can be discerned from inspection of these tables, the omnibus tests were nonsignificant; however, examination of the individual variable means disclosed that four of the seven dependent measures in slow flight suggested that superior performance was evidenced under no turbulence conditions. Contrary to this finding, seven of the eight dependent measures used in the aileron roll suggested that performance improved when some level of turbulence was present.

3⁴ System Variables. Table 9 lists the effects observed when the system configuration variables were analyzed.

Of the three system main effects evaluated by multivariate techniques in the slow flight maneuver, the most prominent was the motion effect ($p < .001$). Those variables which attained significance in the univariate analysis also indicated that subject performance was superior in the absence of platform motion.

The FOV and the G-seat variables produced mixed results in the slow flight maneuver as evidenced by the nonsignificant multivariate and univariate tests (Table 9). Surprisingly, the majority of the dependent measures in the slow flight maneuver suggested that superior performance was evidenced in the masked FOV condition.

The FOV main effect was significant in the multivariate analysis of pilot performance of the aileron roll. The step-down univariate analysis confirmed this effect with a majority of the system output and pilot input dependent measures reflecting improved performance under the full FOV condition.

The G-seat main effect did not attain statistical significance in this maneuver for either the multivariate analysis or for any of the individual measures at the univariate level.

Environmental by Environmental Variable Interactions in the 3³ 2³ Design

None of the environmental by environmental variable interactions reached significance in the omnibus tests for any of the three maneuvers. This obvious lack of synergistic effects between environmental factors was somewhat surprising and will be pursued in the Discussion Section.

System by System Variable Interactions in the 3³ 2³ Design

The system variables, consisting of platform motion, FOV, and G-seat, produced the interactions shown in Table 10.

Considering all three maneuvers used in this design, only two of the three possible first order interactions of the system variables attained statistical significance. The FOV by G-seat interaction did not reach significance in any of the three maneuvers.

Motion by FOV. The motion by FOV interaction was statistically significant in the multivariate analysis for both the takeoff and GCA maneuvers. Table 11 and 12 give the dependent

Table 7. G-Seat Main Effects Across Takeoffs,
GCAs, and Overhead Pattern Maneuvers

Source	\bar{x} (Off)	\bar{x} (On)	SSBET	SSW/IN	F	p
Takeoff						
Heading Deviation	3.34	3.44	.594	672	.189	.664
Pitch Attitude	1.96	1.70	3.63	113	6.91	.009*
Course Deviation	1.02	1.20	1.66	220	1.62	.205
Airspeed Deviation	5.63	4.51	68.0	3,510	4.15	.043*
Elevator Power	2.47	2.63	1.36	113	2.559	.111
Rudder Power	.825	.741	.376	58.2	1.38	.241
Aileron Power	.367	.474	.619	25.1	5.28	.022*
Wilks Lambda		df ₁		df ₂		p(F>F ₀)
.909		7		208		.005*
GCA						
Total Score	23.5	26.0	355	25,900	2.93	.088
Touchdown Score	84.0	83.2	37.5	31,100	.258	.612
Altitude Deviation	44.0	35.2	4,240	87,800	10.2	.002*
Airspeed Deviation	2.70	2.48	2.76	356	1.66	.199
Centerline Deviation	108	95.3	8,760	277,000	6.76	.010*
Glidepath Deviation	37.3	34.6	414	43,000	2.06	.152
Elevator Power	.425	.472	.118	12.2	2.07	.151
Aileron Power	.483	.445	.075	30.3	.529	.468
Rudder Power	.113	.104	.005	5.16	.186	.666
Elevator Power	3.97	4.42	11.1	1,370	1.73	.189
Aileron Power	1.66	1.69	.035	407	.018	.893
Rudder Power	7.77	8.62	39.4	18,000	.468	.495
Wilks Lambda		df ₁		df ₂		p(F>F ₀)
.855		12		203		.001*
Overhead Pattern						
Pitchout Altitude	42.3	41.3	52.9	172,000	.066	.798
Pitchout Bank	11.7	9.67	221	6,550	7.23	.008*
Elevator Power	1.68	2.09	9.19	356	5.53	.020*
Aileron Power	.525	.553	.042	42.8	.208	.649
Rudder Power	.062	.083	.025	9.78	.553	.458
Downwind Altitude Deviation	40.8	39.6	72.6	124,000	.126	.723
Downwind Score	67.2	66.1	63.7	137,000	.100	.753
Elevator Power	1.94	2.23	4.27	301	3.04	.083
Aileron Power	1.16	1.27	.721	221	.698	.404
Rudder Power	.116	.084	.053	7.01	1.599	.207
Final Turn Bank Deviation	10.6	10.5	1.34	5,240	.055	.815
Final Turn Airspeed Deviation	5.89	5.78	.738	3,140	.050	.822
Elevator Power	1.52	1.74	2.73	275	2.126	.146
Aileron Power	.816	.799	.017	53.5	.067	.796
Rudder Power	.411	.432	.023	119	.041	.840
Glidepath Deviation	1.27	1.03	3.14	290	2.32	.130
Centerline Deviation	159	105	153,000	1,350,000	2.43	.121
Final Airspeed Deviation	4.89	4.71	1.77	3,410	.111	.739
Final Score	12.5	8.05	1,080	77,800	2.96	.087
Elevator Power	2.78	3.27	1,229	548	5.05	.026*
Aileron Power	2.03	1.87	1.36	355	.821	.366
Rudder Power	4.00	3.98	.040	3,180	.003	.958
Landing Score	76.0	77.0	54.0	23,800	.487	.486
Wilks Lambda		df ₁		df ₂		p(F>F ₀)
.864		23		192		.159

Note. — All univariate Fs evaluated at F_{1,214}.

*p < .05.

Table 8. Turbulence Main Effects for the Slow Flight
and Aileron Roll Maneuvers

Source	\bar{x} (None)	\bar{x} (Light)	\bar{x} (Mod)	SSBET	SSW/IN	F	p
Slow Flight							
Altitude Deviation	37.3	44.2	50.1	2,210	43,000	2.01	.141
Airspeed Deviation	1.67	1.81	2.28	5.46	36.8	5.79	.005*
Slip Indicator Deviation	.232	.223	.229	.001	.356	.122	.885
Total Score	36.9	32.7	23.6	2,990	18,300	5.29	.007*
Elevator Power	.631	.638	.898	.125	16.3	2.99	.056
Aileron Power	.379	.411	.509	.228	6.95	1.277	.285
Rudder Power	.058	.066	.054	.002	.366	.210	.811
Wilks Lambda		df_1	df_2				$p(F > F_0)$
.796		14	144				.249
Aileron Roll							
Bank in Deviation	2.12	1.76	2.29	3.98	146	1.06	.351
Roll Accel	13.5	11.4	13.1	70.3	3,620	.756	.473
Roll Score	39.7	35.0	40.8	514	38,900	.516	.599
Bank Out Deviation	3.61	3.63	3.22	2.87	214	.524	.594
Aileron Power (In)	1.89	1.45	1.72	2.71	266	.399	.673
Aileron Power (Roll)	1.55	1.14	1.25	2.39	128	.729	.485
Aileron Power (Out)	1.47	.949	1.16	3.69	142	1.01	.369
Total Score	29.0	28.6	27.7	22.4	33,000	.027	.974
Wilks Lambda		df_1	df_2				$p(F > F_0)$
.840		16	142				.672

Note. — All univariate F's evaluated at $F_{2,78}$.

* $p < .05$.

Mod = Moderate

Table 9 (Continued)

Source	\bar{x} (Off)	\bar{x} (SP Only)	\bar{x} (On)	SSBET	SSW/IN	F	p
G-Seat							
Bank In Deviation	2.17	2.12	1.87	1.39	149	.363	.696
Roll Acceleration	13.1	12.9	12.5	7.53	3,690	.080	.924
Roll Score	42.8	36.3	36.4	761	38,600	.769	.467
Bank Out Deviation	3.75	3.39	3.32	2.85	214	.520	.596
Aileron Power (In)	2.03	1.43	1.60	5.10	263	.756	.473
Aileron Power (Roll)	1.49	1.22	1.23	1.28	129	.387	.681
Aileron Power (Out)	1.45	1.16	.968	3.20	143	.875	.421
Total Score	29.1	29.0	27.2	61.8	32,900	.073	.929
Wilks Lambda		df ₁		df ₂			p(F>F ₀)
.824		16		142			.570

Note. — All univariate F's evaluated at F_{2,78}.

*p < .05.

SP only = Seat Pan Only.

Table 10. Significant System by System Variable Interactions Across All Maneuvers

Source	Wilks Lambda (λ)	df ₁	df ₂	F ₀	p(F>F ₀)
Takeoff					
Motion by G-Seat	.667	14	220	3.52	.000
Motion by Field of View	.787	14	220	1.98	.019
GCA					
Motion by Field of View	.585	24	210	2.69	.000
Overhead Pattern					
Motion by G-Seat	.494	46	188	1.72	.006

Table 11. Field of View by Motion Interaction Cell Means for Takeoff

Source	Field of View (full)			Field of View (masked)		
	0 DOF	3 DOF	6 DOF	0 DOF	3 DOF	6 DOF
1. Heading Deviation	3.24	3.55	3.69	3.41	3.28	3.13
2. To/Att Deviation	1.04	1.97	1.75	1.56	1.93	1.91
3. Course Deviation	1.63	1.05	1.00	.96	1.01	1.00
4. Airspeed Deviation	4.61	5.72	6.22	3.63	5.90	4.32
5. Elevator Power	2.46	2.49	2.86	2.57	2.45	2.47
6. Aileron Power	.57	.88	1.15	.59	.72	.78
7. Rudder Power	.46	.35	.47	.51	.34	.38

Note. — DOF = degrees of freedom, motion platform.

Table 9 (Continued)

Source	\bar{x} (Off)	\bar{x} (SP Only)	\bar{x} (On)	SSBET	SSW/IN	F	p
G-Seat							
Bank In Deviation	2.17	2.12	1.87	1.39	149	.363	.696
Roll Acceleration	13.1	12.9	12.5	7.53	3,690	.080	.924
Roll Score	42.8	36.3	36.4	761	38,600	.769	.467
Bank Out Deviation	3.75	3.39	3.32	2.85	214	.520	.596
Aileron Power (In)	2.03	1.43	1.60	5.10	263	.756	.473
Aileron Power (Roll)	1.49	1.22	1.23	1.28	129	.387	.681
Aileron Power (Out)	1.45	1.16	.968	3.20	143	.875	.421
Total Score	29.1	29.0	27.2	61.8	32,900	.073	.929
Wilks Lambda		df ₁		df ₂			p(F>F ₀)
.824		16		142			.570

Note. — All univariate F's evaluated at F_{2,78}.

*p < .05.

SP only = Seat Pan Only.

Table 10. Significant System by System Variable Interactions Across All Maneuvers

Source	Wilks Lambda (λ)	df ₁	df ₂	F ₀	p(F>F ₀)
Takeoff					
Motion by G-Seat	.667	14	220	3.52	.000
Motion by Field of View	.787	14	220	1.98	.019
GCA					
Motion by Field of View	.585	24	210	2.69	.000
Overhead Pattern					
Motion by G-Seat	.494	46	188	1.72	.006

Table 11. Field of View by Motion Interaction Cell Means for Takeoff

Source	Field of View (full)			Field of View (masked)		
	0 DOF	3 DOF	6 DOF	0 DOF	3 DOF	6 DOF
1. Heading Deviation	3.24	3.55	3.69	3.41	3.28	3.13
2. To/Att Deviation	1.04	1.97	1.75	1.56	1.93	1.91
3. Course Deviation	1.63	1.05	1.00	.96	1.01	1.00
4. Airspeed Deviation	4.61	5.72	6.22	3.63	5.90	4.32
5. Elevator Power	2.46	2.49	2.86	2.57	2.45	2.47
6. Aileron Power	.57	.88	1.15	.59	.72	.78
7. Rudder Power	.46	.35	.47	.51	.34	.38

Note. — DOF = degrees of freedom, motion platform.

Table 12. Motion by Field of View Interaction Cell Means for GCA

Source	Full Field of View			Masked Field of View		
	0 DOF Motion	3 DOF	6 DOF	0 DOF Motion	3 DOF	6 DOF
1. Total Score	28.15	23.92	23.07	26.39	24.62	22.37
2. Touchdown	83.74	84.15	80.94	85.12	82.70	84.86
3. Altitude Deviation	53.20	44.14	46.65	31.22	38.33	41.94
4. Airspeed Deviation	2.47	2.63	3.02	2.33	2.24	2.81
5. Centerline Deviation	95.47	100.46	102.12	97.93	104.52	109.48
6. Glidepath Deviation	34.91	36.48	32.94	37.67	34.63	39.08
7. Elevator Power	.38	.41	.61	.36	.37	.53
8. Aileron Power	.25	.49	.83	.29	.41	.48
9. Rudder Power	.07	.07	.15	.10	.14	.08
10. Elevator Power	3.92	3.40	5.21	4.64	3.98	4.00
11. Aileron Power	1.36	1.56	2.36	1.69	1.29	1.76
12. Rudder Power	7.47	7.54	11.13	9.62	6.11	7.25

variables means for the treatment cells of both maneuvers. Table 13 gives ratings of the mean performance for these maneuvers. Inspection of this table reveals best performance falling in the no motion, full FOV condition in the GCA. In this maneuver, performance generally deteriorates with the introduction of platform motion. The same deterioration in performance occurred in the take-

off maneuver under the three and six DOF platform motion conditions. The analysis of the data from both maneuvers suggests that superior performance occurred under the masked FOV condition. The best performance in the takeoff maneuver occurred with the masked FOV, but when 6 DOF of platform motion was present.

Table 13. Motion by FOV Interaction Mean Ratings for the GCA and Takeoff Maneuvers

		GCA	
		Field of View	
		Full	Masked
Motion	0 DOF	2.29*	2.83
	3 DOF	3.37	2.83
	6 DOF	5.33*	4.33

$$\chi^2 \text{ crit} = 2.99$$

		Takeoff	
		Full	Masked
Motion	0 DOF	3.00	2.85
	3 DOF	4.42	3.14
	6 DOF	4.78	2.78

$$\chi^2 \text{ crit} = 3.32$$

*Indicates significant difference.

Table 16. Motion by G-Seat Interaction Mean Ratings for the Takeoff and Overhead Pattern Maneuvers

		<u>Takeoff</u>	
		<u>G-Seat</u>	
		Off	On
Motion	0 DOF	2.64	3.28
	3 DOF	3.21	3.71
	6 DOF	4.57	3.57
		χ^2 crit = 3.32	
		<u>Overhead Pattern</u>	
		<u>G-Seat</u>	
		Off	On
Motion	0 DOF	2.48*	3.22
	3 DOF	3.76	3.20
	6 DOF	4.37*	3.98
		χ^2 crit = 1.82	

*Denotes significant difference.

System by Environmental Variable Interactions in the $3^3 2^3$ Design

The third type of interaction considered in this study was the system by environmental variable interaction. These data are listed in Table 17.

Of the nine possible first order interactions between environmental and system variables, only three attained statistical significance in the multi-variate test.

Turbulence by Motion. The turbulence by motion interaction was significant in all three maneuvers. Table 18, 19, and 20 present the treatment cell means across all dependent variables.

Table 21 shows the mean ratings of performance for this interaction across the three maneuvers. In all cases, best performance was demonstrated in the no motion, no turbulence conditions. Thereafter, pilot performance consistently became poorer as turbulence and platform motion increased.

C/V by FOV. The second interaction, ceiling visibility by FOV, and the final significant interaction of this type, C/V by G-seat, were

manifested only within the analysis of the GCA maneuver. Table 22 gives the mean performances for the C/V by FOV treatment cells.

C/V by G-Seat. As stated above, this interaction was statistically significant only for the GCA maneuver. Table 23 lists the mean performance observed for the C/V by G-seat treatment cells.

Analysis of C/V Interactions. Table 24 shows the differences in the mean ratings for the two C/V interactions. In both instances, superior performance was evidenced in the clear C/V conditions. This performance was accompanied in the first interaction with the masked FOV, and in the second with the G-seat being operational.

The Second Order Interaction in the $3^3 2^3$ Design. The most surprising interaction produced was a second order interaction, C/V by FOV by G-seat, that reached probability levels of $p = < .025$, $p = < .01$, and $p = < .001$ in the multi-variate analysis of the takeoff, GCA, and overhead pattern maneuvers, respectively. Tables 25, 26 and 27 contain the mean performance data on these maneuvers. Table 28 contains the mean ratings of performance for this interaction across all three

Table 16. Motion by G-Seat Interaction Mean Ratings for the Takeoff and Overhead Pattern Maneuvers

		<u>Takeoff</u>	
		<u>G-Seat</u>	
		Off	On
Motion	0 DOF	2.64	3.28
	3 DOF	3.21	3.71
	6 DOF	4.57	3.57
		χ^2 crit = 3.32	
		<u>Overhead Pattern</u>	
		<u>G-Seat</u>	
		Off	On
Motion	0 DOF	2.48*	3.22
	3 DOF	3.76	3.20
	6 DOF	4.37*	3.98
		χ^2 crit = 1.82	

*Denotes significant difference.

System by Environmental Variable Interactions in the $3^3 2^3$ Design

The third type of interaction considered in this study was the system by environmental variable interaction. These data are listed in Table 17.

Of the nine possible first order interactions between environmental and system variables, only three attained statistical significance in the multivariate test.

Turbulence by Motion. The turbulence by motion interaction was significant in all three maneuvers. Table 18, 19, and 20 present the treatment cell means across all dependent variables.

Table 21 shows the mean ratings of performance for this interaction across the three maneuvers. In all cases, best performance was demonstrated in the no motion, no turbulence conditions. Thereafter, pilot performance consistently became poorer as turbulence and platform motion increased.

C/V by FOV. The second interaction, ceiling visibility by FOV, and the final significant interaction of this type, C/V by G-seat, were

manifested only within the analysis of the GCA maneuver. Table 22 gives the mean performances for the C/V by FOV treatment cells.

C/V by G-Seat. As stated above, this interaction was statistically significant only for the GCA maneuver. Table 23 lists the mean performance observed for the C/V by G-seat treatment cells.

Analysis of C/V Interactions. Table 24 shows the differences in the mean ratings for the two C/V interactions. In both instances, superior performance was evidenced in the clear C/V conditions. This performance was accompanied in the first interaction with the masked FOV, and in the second with the G-seat being operational.

The Second Order Interaction in the $3^3 2^3$ Design. The most surprising interaction produced was a second order interaction, C/V by FOV by G-seat, that reached probability levels of $p = < .025$, $p = < .01$, and $p = < .001$ in the multivariate analysis of the takeoff, GCA, and overhead pattern maneuvers, respectively. Tables 25, 26 and 27 contain the mean performance data on these maneuvers. Table 28 contains the mean ratings of performance for this interaction across all three

Table 17. Significant System by Environmental Interactions Across all Maneuvers

Source	Wilks Lambda (λ)	df ₁	df ₂	F ₀	p(F>F ₀)
Takeoff					
Turbulence by Motion	.639	28	398.03	1.877	.005
C/V by FOV by G	.867	7	110	2.414	.024
GCA					
Turbulence by Motion	.480	48	406.50	1.77	.001
C/V by FOV	.774	12	105	2.54	.005
C/V by G	.774	12	105	2.54	.005
C/V by FOV by G	.688	12	105	3.95	.000
Overhead Pattern					
Turbulence by Motion	.312	92	374.56	1.39	.017
C/V by FOV by G	.586	23	94	2.88	.000
Slow Flight					
None					
Aileron Roll					
None					

C/V = Ceiling/Visibility
FOV = Field of View
G = G-Seat

Table 18. Turbulence by Motion Interaction Cell Means for Takeoff

Source	0 DOF Motion			3 DOF Motion			6 DOF Motion		
	No Turb	Light Turb	Mod Turb	No Turb	Light Turb	Mod Turb	No Turb	Light Turb	Mod Turb
Heading	3.32	3.43	3.22	3.60	3.43	3.22	3.01	3.50	3.72
Altitude Deviation	1.86	1.55	1.68	1.79	2.20	1.87	2.09	1.82	1.57
Course Deviation	1.13	1.55	1.20	.90	1.12	1.05	.98	1.05	.97
Airspeed	5.27	3.26	3.82	4.60	6.16	6.69	4.54	5.75	5.52
Elevator Power	2.29	2.74	2.51	2.44	2.42	2.56	2.42	2.63	2.94
Aileron Power	.53	.59	.60	.78	.83	.77	.76	1.01	1.12
Rudder Power	.38	.48	.58	.26	.38	.39	.47	.33	.48

Note. — Turb = Turbulence.

Table 19. Turbulence by Motion Interaction Cell Means for GCA

Source	0 DOF Motion			3 DOF Motion			6 DOF Motion		
	No Turb	Light Turb	Mod Turb	No Turb	Light Turb	Mod Turb	No Turb	Light Turb	Mod Turb
Total Score	26.601	27.23	27.98	25.69	22.96	24.16	27.06	18.05	23.06
Touchdown Score	83.56	82.96	86.76	80.31	83.05	86.42	83.50	81.65	83.56
Altitude Deviation	30.94	32.70	35.99	37.43	37.51	48.76	35.35	50.67	46.87
Airspeed Deviation	1.74	2.42	3.04	2.19	2.48	2.64	2.13	2.95	3.68
Centerline Deviation	102.53	92.23	95.35	101.92	106.26	99.29	100.21	115.73	101.46
Glidepath Deviation	34.30	35.94	38.62	35.32	35.79	35.56	32.15	37.85	38.03
Elevator Power	.30	.40	.42	.35	.33	.49	.39	.61	.70
Aileron Power	.23	.28	.31	.44	.42	.49	.47	.71	.79
Rudder Power	.07	.07	.12	.05	.09	.18	.08	.15	.13
Elevator Power	4.03	4.13	4.69	3.56	3.26	4.23	3.84	4.67	5.30
Aileron Power	7.44	8.31	9.92	8.74	5.60	6.14	7.89	8.38	11.31

Note. -- Turb = Turbulence.

Table 20. Turbulence by Motion Interaction Cell Means for Overhead Pattern

Source	No Turbulence			Light Turbulence			Moderate Turbulence		
	0 DOF Motion	3 DOF	6 DOF	0 DOF Motion	3 DOF	6 DOF	0 DOF Motion	3 DOF	6 DOF
1. Altitude Deviation	38.65	38.59	47.36	37.79	44.08	53.03	34.32	39.06	42.92
2. Bank Deviation	8.91	11.46	11.35	10.94	12.64	9.79	10.51	9.36	11.15
3. Elevator Power	1.29	1.64	1.48	2.22	1.64	2.13	2.06	1.85	1.73
4. Aileron Power	.45	.63	.49	.48	.39	.75	.37	.51	.74
5. Rudder Power	.05	.02	.04	.08	.03	.16	.04	.14	.05
6. Altitude Deviation	35.79	38.85	37.64	32.91	38.14	46.47	33.18	47.13	52.70
7. Downwind Score	70.17	71.74	72.44	69.28	66.32	63.32	71.21	58.48	59.65
8. Elevator Power	2.15	1.76	1.95	2.38	1.46	2.37	2.11	1.99	2.56
9. Aileron Power	.80	1.29	1.38	.94	1.13	1.76	.94	1.09	1.58
10. Rudder Power	.05	.04	.02	.08	.12	.13	.15	.16	.11
11. Bank Deviation	10.11	11.58	11.12	10.27	11.05	10.18	9.45	9.18	11.73
12. Airspeed Deviation	4.36	6.30	6.00	5.19	7.54	5.24	7.47	4.56	5.83
13. Elevator Power	1.32	1.52	1.71	1.78	1.47	1.75	1.53	1.41	2.16
14. Aileron Power	.56	.83	.80	.62	.89	.99	.62	.75	1.15
15. Rudder Power	.33	.50	.25	.70	.27	.36	.40	.47	.47
16. Altitude Deviation	1.17	.89	1.09	1.13	1.09	1.60	1.11	1.35	.88
17. Centerline Deviation	183.57	96.39	143.72	73.68	141.35	200.07	125.31	163.29	59.01
18. Airspeed Deviation	5.70	4.15	3.77	3.49	3.53	5.50	5.44	6.48	5.09
19. Final Score	5.86	17.39	10.17	12.90	10.09	5.36	5.82	9.05	15.85
20. Elevator Power	3.25	2.35	3.07	3.05	2.90	3.03	3.53	2.96	3.01
21. Aileron Power	1.59	1.91	2.27	1.58	2.12	1.92	1.91	2.09	2.14
22. Rudder Power	3.64	3.22	3.20	4.72	3.26	3.50	4.81	3.96	5.55
23. Total Score	80.57	73.14	75.90	73.31	75.02	77.53	80.36	80.34	72.10

Table 21. Turbulence by Motion Interaction Mean Ratings for the Takeoff, GCA and Overhead Pattern Maneuvers

		<u>Takeoff</u>		
		<u>Turbulence</u>		
		None	Light	Moderate
Motion	0 DOF	4.07	4.71	4.78
	3 DOF	4.28	6.07	4.78
	6 DOF	4.92	6.00	6.35

χ^2 crit = 5.74

		<u>GCA</u>		
		<u>Turbulence</u>		
		None	Light	Moderate
Motion	0 DOF	3.08	3.58	5.08
	3 DOF	4.33	4.41	5.33
	6 DOF	3.83	3.75	7.41

χ^2 crit = 4.37

		<u>Overhead Pattern</u>		
		<u>Turbulence</u>		
		None	Light	Moderate
Motion	0 DOF	4.06	4.69	4.52
	3 DOF	4.21	4.60	5.32
	6 DOF	4.52	6.65	6.39

χ^2 crit = 3.17

Table 22. Ceiling/Visibility by FOV Interaction Cell Means for GCA

Source	Full Field of View		Masked Field of View	
	Clear	Minimums	Clear	Minimums
Total Score	25.51	24.58	28.34	20.58
Touchdown Score	85.29	80.61	84.58	83.88
Altitude RMS Error	46.57	37.42	34.23	40.10
Airspeed RMS Error	2.82	2.59	2.34	2.58
Centerline Deviation	98.17	100.54	91.88	116.07
Glidepath Deviation	34.80	34.75	34.53	39.73
Elevator Power	.46	.47	.39	.45
Aileron Power	.57	.48	.35	.44
Rudder Power	.10	.10	.11	.11
Elevator Power	4.63	3.72	3.92	4.50
Aileron Power	1.78	1.74	1.30	1.86
Rudder Power	9.70	7.74	6.73	8.59

Table 23. Ceiling/Visibility by G-Seat Interaction Cell Means for GCA

Source	G-Seat Off		G-Seat On	
	Clear	Minimums	Clear	Minimums
Total Score	25.25	21.69	28.61	23.46
Touchdown Score	84.57	33.44	85.29	81.05
Altitude RMS Error	49.87	38.11	30.93	39.41
Airspeed RMS Error	2.72	2.68	2.44	2.50
Centerline Deviation	100.14	115.93	89.91	100.68
Glidepath Deviation	34.68	37.99	32.65	36.49
Elevator Power	.40	.44	.45	.48
Aileron Power	.49	.46	.42	.46
Rudder Power	.11	.10	.09	.11
Elevator Power	3.92	4.01	4.63	4.21
Aileron Power	1.52	1.78	1.54	1.82
Rudder Power	7.91	7.61	8.52	8.72

Table 26. Ceiling/Visibility by FOV by G-Seat Interaction Cell Means GCA

Source	G-Seat Off				G-Seat On			
	Full Field of View		Masked Field of View		Full Field of View		Masked Field of View	
	Clear	Minimum	Clear	Minimum	Clear	Minimum	Clear	Minimum
1. Total Score	22.29	25.15	28.21	18.24	28.74	24.02	28.47	22.91
2. Touchdown Score	84.52	84.33	84.62	82.54	86.05	76.88	84.54	85.21
3. Alt Deviation Error	62.04	32.96	37.64	43.26	31.10	41.88	30.76	36.94
4. Airspeed Deviation Error	3.08	2.58	2.35	2.77	2.56	2.61	2.32	2.39
5. Centerline Deviation	107.89	104.17	92.40	127.68	88.45	96.90	91.37	104.47
6. Glidepath Deviation	37.23	34.64	36.13	41.34	32.38	34.86	32.92	38.11
7. Elevator Power	.44	.46	.35	.43	.48	.49	.42	.48
8. Aileron Power	.63	.44	.36	.49	.51	.52	.33	.39
9. Rudder Power	.12	.08	.11	.12	.08	.11	.11	.10
10. Elevator Power	3.84	3.42	4.01	4.60	5.42	4.03	3.84	4.39
11. Aileron Power	1.96	1.32	1.10	2.24	1.60	2.16	1.49	1.48
12. Rudder Power	9.35	6.62	6.47	8.61	10.04	8.87	7.00	8.57

Table 27. Ceiling/Visibility by FOV by G-Seat Interaction Cell Means for Overhead Pattern

Source	G-Seat Off				G-Seat On			
	Full Field of View		Masked Field of View		Full Field of View		Masked Field of View	
	Clear	Minimum	Clear	Minimum	Clear	Minimum	Clear	Minimum
1. Altitude Deviation	47.04	37.45	29.74	54.78	27.00	64.98	41.24	31.82
2. Bank Deviation	13.93	10.58	12.36	9.90	8.74	10.78	10.63	8.52
3. Elevator Power	1.16	2.16	1.73	1.66	2.08	2.05	2.24	1.98
4. Aileron Power	.47	.69	.37	.56	.62	.59	.43	.55
5. Rudder Power	.06	.06	.06	.04	.16	.05	.02	.08
6. Altitude Deviation	45.39	34.77	32.47	50.49	27.93	56.19	37.47	36.88
7. Downwind Score	57.58	69.38	69.30	62.55	76.03	48.41	68.67	71.35
8. Elevator Power	1.32	2.54	1.59	2.31	2.11	2.54	1.81	1.43
9. Aileron Power	1.04	1.29	.82	1.47	1.45	1.56	.96	1.11
10. Rudder Power	.14	.07	.11	.13	.07	.07	.09	.08
11. Bank Deviation	12.03	12.55	7.17	10.68	10.30	10.90	9.79	10.81
12. Airspeed Deviation	4.80	6.07	5.27	7.42	5.13	6.98	5.06	5.91
13. Elevator Deviation	1.20	1.85	1.29	1.72	2.00	1.52	1.37	2.06
14. Aileron Power	.93	.86	.66	.79	.72	1.03	.65	.77
15. Rudder Power	.43	.25	.58	.37	.64	.29	.39	.39
16. Altitude Deviation	1.46	1.50	.94	1.16	1.04	1.02	.88	1.16
17. Centerline Deviation	205.9	268.0	42.56	117.75	88.88	96.20	101.43	134.62
18. Airspeed Deviation	4.63	6.87	3.06	4.97	5.06	5.44	4.14	4.18
19. Final Score	12.22	11.28	16.98	9.55	7.54	5.90	14.00	4.74
20. Elevator Power	2.46	3.31	2.43	2.89	3.43	2.85	3.11	3.66
21. Aileron Power	2.14	2.09	1.60	2.29	1.73	2.29	1.58	1.88
22. Rudder Power	3.66	4.23	3.23	4.87	4.23	3.92	3.36	4.37
23. Total Score	77.06	76.32	77.05	73.47	75.14	76.94	79.19	76.63

Table 28. Ceiling/Visibility by FOV by G-Seat Interaction Mean Ratings for the Takeoff, GCA and Overhead Pattern Maneuvers

		<u>Takeoff</u>			
		<u>G-Seat Off</u>		<u>G-Seat On</u>	
		Full FOV	Masked FOV	Full FOV	Masked FOV
Ceiling Visibility	Clear	1 4.28	2 2.43	3 5.00	4 2.92
	Minimum	5 5.50	6 6.07	7 6.00	8 3.50

χ^2 crit = 4.91

Significant Cell Differences: None

		<u>GCA</u>			
		<u>G-Seat Off</u>		<u>G-Seat On</u>	
		Full FOV	Masked FOV	Full FOV	Masked FOV
Ceiling Visibility	Clear	1 6.33	2 2.83	3 3.75	4 2.46
	Minimum	5 3.45	6 6.70	7 5.92	8 4.54

χ^2 crit = 3.75

Significant cell Differences: 1-4, 2-6, 4-6

		<u>Overhead Pattern</u>			
		<u>G-Seat Off</u>		<u>G-Seat On</u>	
		Full FOV	Masked FOV	Full FOV	Masked FOV
Ceiling Visibility	Clear	1 4.65	2 2.80	3 4.06	4 3.32
	Minimum	5 5.56	6 5.34	7 5.52	8 4.60

χ^2 crit = 2.70

Significant Cell Differences: 2-5

maneuvers. Best performance was demonstrated under the G-seat off, masked FOV, and clear ceiling/visibility conditions for two of the three maneuvers. Generally, performance became poorer with the introduction of minimum C/V as well as introduction of the full FOV when considered in conjunction with G-seat on condition.

Interactions in the 3⁴ Design. Environmental by environmental interactions were non-existent in the 3⁴ design, as only one environmental variable was utilized. Environmental by system interactions and system by system interactions were nonsignificant as evaluated by the Wilks Lambda.

Subject Effects

Measures of subject differences were obtained on all five maneuvers. In both designs, these effects showed that each pilot had particular areas of expertise and sophistication; however, one of the three pilots was more consistently rank ordered in the first position than the other two. The significance for each of the subject effects is available in Appendix B where the MANOVA results for each of the maneuvers are listed.

IV. DISCUSSION OF RESULTS

Introduction

Before proceeding to the discussion proper, a cautionary note must be sounded. Because of the Air Force's urgent need for empirical data dealing with the material in this study, the real danger exists that overgeneralization or misgeneralization of the results may occur, thus leading to inappropriate or perhaps even incorrect decisions.

The experimental results of this study should be considered with the following facts in mind:

1. This study dealt only with experienced pilot performance so no generalizations should be made to the naive student training situation.
2. Performance in the study is reflected only in scores attained in the ASPT simulator and might in no way generalize to either performance in the aircraft, another simulator, or even to ASPT if it were programmed using different equations of flight.
3. Generalizations to the population from which the three subject pilots came are valid only to the extent that this small n is representative of

the population of experienced T-37 instructor pilots. An attempt was made to partially control for this source of external invalidity through selection of the pilots used, but to the extent that the matching process was incomplete, the results could be misrepresentative.

4. The results of this study should probably not be generalized to maneuvers other than those flown during the experiment. The effects of motion, visual scene and G-seat are most likely quite task specific, and thus a particular set of design configurations that yielded no significant effect on the five maneuvers tested in this study could have produced different results had other tasks been tested.

5. The issue of training transfer to the aircraft cannot validly be addressed based upon the data collected in this study. Thus, although no motion performance was generally superior to performance in either 3 DOF or 6 DOF motion configurations, performance could be better simply because it is *easier* to fly the simulator without the task load added by a moving platform.

6. The basic purpose of the study was exploratory in nature. Hopefully, more definitive statements about the simulator design configurations issue can be made as follow-on study results are made available.

With the foregoing as a preamble, the remainder of this section will deal with an interpretation of the experimental findings. The general approach will parallel that used in the Results Section.

Environmental Variables

Part of the rationale for inclusion of environmental variables in this study was an attempt to provide face validity for the performance measurement algorithms as currently implemented in ASPT. Additionally, these variables provided a more realistic setting for the completion of each maneuver.

Overall, the environmental variables produced the anticipated results; that is, superior performance as demonstrated by system output, pilot input and derived scores was generally evidenced in "clear weather" conditions. Normally, as the weather conditions deteriorated, so did the pilots' performance. These results strongly indicate that the scoring algorithms were valid and that they operated in the intended manner. Specifically, only the turbulence variable failed to reach significance in *all* of the maneuvers where it was

evaluated. This was not surprising in that turbulence is always present to some degree in actual flight. The pilots, therefore, probably had the most experience in adapting to the disturbances produced by this variable.

System Variables

The variables of primary concern, platform motion, FOV and G-seat all evidenced significant impact upon the pilots' performance in the simulator. The first system configuration variable, platform motion, evidenced significant main effects on every maneuver investigated. This result provided evidence that although an individual may not be able to discern the operation or nonoperation of the motion platform, the status of the motion platform directly affected performance in the simulator. Generally, the pilots' performance was best under the no-motion condition and deteriorated with the addition of degrees of freedom of simulator movement. From a performance standpoint then, as the simulator became less stable, the pilots' scores became poorer, perhaps indicative of a more difficult task. Another possible explanation which accounts for the poorer performance under conditions of motion is that the motion platform may have provided inadequate or inappropriate cueing. The time lag between pilot input and system output may have contributed to the increased difficulty of achieving successful performance.

The G-seat significantly affected performance on two of the five maneuvers: the takeoff, and GCA maneuvers. One obvious characteristic common to the two maneuvers is the inherent lack of violent movements around the roll axis and to a lesser degree, the pitch axis. The overhead maneuver, the aileron roll, and to a limited extent, the slow flight maneuvers all incorporated rotational movement along the lateral axis. The lack of significance in the roll-oriented maneuvers may have been due to an engineering flaw which surfaced after the completion of data collection. It was discovered that the G-seat was functioning as if it were located at the center of gravity of the simulated T-37 aircraft rather than forward and slightly to the left of the CG as in the aircraft itself. This decreased the moment arm of the pilots' position relative to the longitudinal axis of the aircraft to near nonexistence. Thus, the G-seat may have been prevented from providing cues of the necessary magnitude. In those instances where the G-seat did produce significant effects, however, the performance was generally superior when

the G-seat was functional as compared to when it was not. The differences between the seat pan only and full G-seat conditions in the aileron roll and slow flight maneuvers were inconsistent. Therefore, no interpretation should be drawn as to which was the superior condition.

The FOV variable evidenced significant differences in only one of the five maneuvers, aileron roll, and approached significance on one other maneuver, the overhead pattern. Inspection of the dependent variable values, however, consistently suggested that overall, the full FOV condition produced somewhat better performance. In spite of this, it seemed that on the basis of the overall nonsignificance, the additional cue information provided by the wide visual display was either not particularly vital or could be acquired from other sources (e.g., the instruments).

The performance of the aileron roll maneuver was superior under the full FOV condition as compared to no display and masked FOV display conditions. When the aileron roll and GCA's dependence upon precise rotational movement around the longitudinal axis of the aircraft was considered, it appeared that FOV is an important factor. In these cases, the wide FOV provided additional information regarding the bank position of the aircraft.

System by System Variable Interactions

All of the significant first order interactions of the system variables included the platform motion variable. This coupled with the relatively strong motion main effects attested to the power of this factor upon pilot performance. Consistently, the addition of some level of platform motion, either three or six DOF, in the presence of a full or a masked FOV, caused pilot performance to be degraded. This performance decrement was observed in the presence (or absence) of the G-seat as well. The deterioration in the scores was somewhat lessened by the presence of the G-seat or the masked FOV. Obviously, the G-seat was providing important cues to the pilot when used in conjunction with ASPT's platform motion system. But, it should not be forgotten that the best performance on the maneuvers was observed when neither motion cueing system was functioning. The better scores produced by the masked FOV, when used in conjunction with platform motion, is somewhat more difficult to explain. Possibly, the

limitations in the visual scene caused the pilot to seek the information from other sources, most likely the instrument panel. Instrument flight is commonly accepted to be a more precise mode of flight than is contact or visual flight.

System by Environmental Variable Interactions

The turbulence by motion interaction consistently demonstrated a synergistic effect between motion and turbulence variables. Both variables independently caused performance decrements when added in increasing amounts and when used in conjunction, these variables caused even greater deterioration. A simple explanation is that both the platform motion and the turbulence adversely affected the stability of the pilots' vehicle, thus causing more random fluctuation of the vehicle's flight path. The significant motion by turbulence interaction supported this argument.

Other significant interactions were the C/V by G-seat, C/V by FOV, and the second order C/V by FOV by G-seat interaction. These factors (C/V, FOV and G-seat) showed a surprisingly strong interactive potential. In the C/V by G-seat interaction in the GCA, best performance under clear weather conditions was evidenced when the G-seat was functional. However, when the weather deteriorated to minimums best performance occurred when the G-seat was inoperative. This interaction seemed to emphasize the differences between piloting processes in instrument and visual flight. Under IFR conditions, the pilot is trained to disregard kinesthetic information and relies upon the information provided by the instrument display. In visual flight, the pilot makes more use of "seat-of-the-pants" cues in controlling the vehicle.

The C/V by FOV interaction was somewhat more difficult to interpret. Under clear weather conditions, superior performance in the GCA was produced when the FOV was masked. Conversely, when the visibility was poor, the pilots performed better with the visual display at its full extent. It would appear that the additional information provided by the full FOV was beneficial in poor weather, but distracting in the clear conditions. This seems reasonable in that the cues necessary to perform a GCA in clear weather are largely concentrated directly ahead of the aircraft.

The C/V by FOV by G-seat interaction was very surprising due to the consistency and size of this second order effect. In all the maneuvers where this effect could have occurred, it was significant and large. Best performance occurred with clear C/V as compared to minimum C/V. This

result remained constant across all conditions of FOV and G-seat. Similarly, the masked FOV consistently produced better performance than did the full FOV condition. The G-seat variable, however, did not demonstrate the consistency that the other variables manifested, and no interpretation is readily apparent when the G-seat contrasts are considered. One possible explanation for this phenomenon was that the visual information required to successfully complete the maneuvers used in this study was concentrated directly forward of the aircraft, and that the additional information provided by the wide FOV was unnecessary. This, coupled with the information degradation caused by poor visibility, could have negatively affected the pilots' performance.

Subject Effects

Individual differences are not unusual in psychological research, and consistent significant subject effects were found throughout all of the maneuvers. These data strongly suggest that the pilots' patterns of vehicle control were quite individualistic. It also strongly implies that when presented new system or environmental conditions, pilots adapt to these changes in different ways. This evidence discredits the theory that all pilots would respond to simulator system configuration changes in like manner, or that system output measures are the only dependent variables of interest in simulation research.

Dependent Measures

An investigation of the dependent measures revealed basic differences in the sensitivity of the types of measures as a function of the simulator and environmental conditions presented to the pilot. Using the ratio of the non-error variance of each dependent measure on one effect to the remainder of the non-error variance, it was seen that if a change to the vehicle's environment occurred, the system output variables were most responsive. If changes to the vehicle's configuration occurred, the pilot input measures were most sensitive to the changes. This finding provided additional face validity for the dependent measurement set. The derived scores were equally distributed in their sensitivity to either environmental or configuration modification. Thus, if one wished to assess differences in performance occurring due to changes in simulator configuration, pilot input measures would seem to be most appropriate. On the other hand, if differences due to environmental alterations are sought, system output measures would seem to be most appropriate.

V. DISCUSSION OF METHOD

There are two aspects of the methodology selected for use in this study that deserve further discussion. The first issue deals with the design and analysis of the study; the second involves the types of measures used as dependent variables.

Study Design and Analysis

The problem faced at the conception of the study was multi-faceted. It was necessary to explore a large number of simulator configurations. The constraint was, however, to conduct the evaluation as economically as possible in terms of the number of subjects, the number of data measurement points and the amount of system time required. The selection of an economical multifactor design provided the vehicle that met these requirements.

Several trade-offs, therefore, were incurred as a result of the particular experimental designs used in this study. First, replication of measurement points became impossible. Although the lack of redundancy in the measurement process was expected to cause an increase in the variability of certain descriptive indices, it was outweighed by the confidence vested within the dependent measurement set.

Second, subject by treatment interactions, and third order interactions were unavailable for analysis due to the extremely small number of subjects. To counter part of this limitation, experienced pilots were selected as subjects to minimize the subject by treatment interactions. Also, past experience had shown that third and higher order interactions rarely contributed much to the non-error variance.

The results of this study substantiated the majority of the original assumptions. The major sources of variability were identified. Only one second order interaction reached a level of appreciable significance. All indications supported the efficacy of this type of research design for the investigation of a multitude of independent variables upon task-experienced subjects. If, however, the research interest were in training paradigms, this type of design does not appear to provide the same benefits, largely due to the underlying assumption that subject by treatment interactions are of negligible importance, which is likely not true in training studies.

In this study a vast number of dependent variables were collected for the purpose of evaluating the measurement set. Therefore, the multi-variate

approach was chosen. The MANOVA permitted the measurement set as a whole (taking into account all of the inter-correlations of the individual dependent measures) to be evaluated for its responsiveness to the independent variables. It should be pointed out that the analysis of this study solely from an univariate standpoint, would encounter two problems: (a) each dependent measure would have been assumed to be orthogonal (an obviously fallacious assumption), and (b) the Type I error rate would be enormously inflated. If this study had been conducted only at the univariate level, the Type I error rate would have been: (assuming $p < .05$ significant) $1 - (1 - .05)^{57} = .947$, which is quite unacceptable.

Dependent Measures

The dependent measurement set used in this study was large. It was decided at the inception of this project that in order to fully describe the impact of the independent variables upon the pilot performance in the simulator, two areas must be measured: the aircraft's flight parameters and the work done by the pilot.

The results of the study clearly indicated that no one type of measure was sufficiently descriptive. Review of the non-error variances for the dependent measures illustrated that system output measures were sensitive to environmental changes and that pilot input measures were more responsive to system configuration changes.

This study provided basic information on the utility of the dependent measurement sets. A second study, currently underway will provide additional data. Taking the two studies together should allow a reduction in the number of dependent measures required to describe pilot performance, yet not decrease the discriminability or explanatory properties of the measurement system.

VI. SUMMARY AND CONCLUSIONS

This study demonstrated the complexity of advanced simulation systems and reinforced the postulation that investigations stressing only one aspect of the simulation are somewhat naive. Research must be concerned not only with the particular system under question, but the task to be performed, the configuration of other portions of the simulation, and what types of measurements are employed. All of these factors interact

with each other and continually affect the resultant data.

In this study, each of the system configuration variables produced significant effects. The platform motion variable had a striking impact upon pilot performance. Almost invariably, the addition of platform motion cueing produced a concomitant decline in performance. Interest in this particular variable has prompted continuing research efforts in all major simulation devices including the ASPT. Further detailed aspects of motion cueing will be explored at AFHRL/FT.

Another system variable, the G-seat, although less dominant than the platform motion variable in its main effects, demonstrated a strong interactive potential. Interestingly, the interaction often occurred with a visually oriented independent variable.

The FOV variable showed tendencies to have extremely maneuver-specific effects. Since the magnitude of this effect changed as a function of maneuver and other system variable configurations, the implication is obvious: specifying an optimal FOV across several different maneuvers would be very difficult indeed. Considerable future research activity will be spent studying this particular system variable in the following areas:

(a) FOV width and height, (b) content and density of visual information, and (c) texturing to produce accurate depth cues.

The interactions of significant impact in this study, as stated previously, confirmed the difficulty of attempting to isolate individual effects. These interactions, having been outlined in this study, are being pursued in a second study. The emergence of a strong, second order interaction across all three maneuvers in the 3^3 2^3 design indicates how completely multiple events affect pilot performance. This and other interactions must be further examined before definitive statements can be made on simulator design configurations.

The dependent variables used to measure performance in this study showed, as expected, that manipulation of the three environmental variable combinations produced changes in the system oriented dependent variables. Similarly, changes in the pilot input variables was concomitant with simulator configuration changes. Further research will be aimed at reducing the dependent measurement sets for certain maneuvers in order to more effectively and economically describe performance in the simulator.

REFERENCES

- Armstrong, B.O. *Flight trials to discover whether peripheral vision is needed for landing*. Royal Aircraft Establishment Technical Report 70205, AD-724 009. November 1970.
- Bell, F.E. *Advanced simulation in undergraduate pilot training (ASUPT) Technical Fact Sheet*. AFHRL-TN-73-01. Williams AFB, AZ: Flying Training Division, Air Force Human Resources Laboratory, May 1974.
- Bergeron, H.P. *Investigation of motion requirements in compensatory control tasks*. IEEE Transactions on Man Machine Systems, June 1970. MMS-11(2), 123-125.
- Borlace, F. *Flight simulator motion, its enhancement and potential for flight crew training*. *Proceedings of the Third International Simulation and Training Conference*. New York: 27 April 1967.
- Brown, F.P., Johnson, H.I., & Mungall, R.G. *Simulator motion effects on a pilot's ability to perform a precise longitudinal flying task*. NASA-TN-D-367, AD-236 265. May 1960.
- Demaree, R.G. Norman, D.A. & Matheny, W.G. *An experimental program for relating transfer of training to pilot performance and degree of simulation*. NAVTRADEVEN-TR-1388-1. Naval Training Device Center, June 1965.
- Hagin, W.V., & Smith, J.F. *Advanced simulation in undergraduate pilot training (ASUPT) facility utilization plan*. AFHRL-TR-74-43, AD-786 411. Williams AFB, AZ: Flying Training Division, Air Force Human Resources Laboratory, June 1974.
- Harris, R.J. *A primer of multivariate statistics*. New York: Academic Press, Inc., 1975.

- Huddleston, H.F. *Cockpit motion requirements for flight simulation*. Royal Air Force Institute of Aviation Medicine, Farnborough, Hants, January 1966.
- Jacobs, R.S., Williges, R.C., & Roscoe, S.N. Simulation motion as a factor in flight-director display evaluation. *Human Factors*, December 1973, 15(6), 569-582.
- Jacobs, R.S., & Roscoe, S.N. Simulator cockpit motion and the transfer of initial flight training. *Proceedings of the Eighth NTEC/Industry Conference*, 18-20 November 1975.
- Kirk, R.E. *Experimental design: procedures for the behavioral sciences*. Belmont, CA: Brooks/Cole Publishing Co., 1968.
- Koonce, J.M. *Effects of ground-based aircraft simulator motion conditions upon prediction of pilot proficiency*. AFOSR-74-3. Air Force Office of Scientific Research. Illinois University, April 1974.
- Meyer, R.P., Laveson, J.I., Weissman, N.S., & Eddowes, E.E. *Behavioral taxonomy of undergraduate pilot training tasks and skills*. AFHRL-TR-74-33(I-IV), AD-A008 771, and AD-A008 897. Williams AFB, AZ: Flying Training Division, Air Force Human Resources Laboratory, December 1974.
- Rathert, G.A., Creer, B.Y., & Sadoff, M. *The use of piloted flight simulators in general research*. Report 365. NATO Advisory Group for Aeronautical Research and Development, 1961.
- Reeder, J.P., & Kolnick, J.J. *A brief study of closed-circuit television for aircraft landing*. NASA-TN-D-2185. February 1964.
- Roscoe, S.N. *Flight by periscope*. University of Illinois Bulletin, 1951, 48, 55.
- Rust, S.K. Flight simulator fidelity assurance. *Proceedings of the Eighth NTEC/Industry Conference*, 18-20 November 1975.
- Simon, C.W. *Economical multifactor designs for human factors engineering experiments*. AFOSR-TR-P73-326. Air Force Office of Scientific Research. 1973.
- Taylor, R., Gerber, A., Allen, M., Brown, L., Cohen, E., Dunbar, D., Flexman, R., Hewitt, W., McElwain, D., Panceo, E., & Simpson, D. *Study to determine requirements for undergraduate pilot training research simulation system (UPTRSS)*. AFHRL-TR-68-11, AD-858 640. Wright-Patterson AFB, OH: Training Research Division, Air Force Human Resources Laboratory, July 1969.
- Waag, W.L., Eddowes, E.E., Fuller, J.H., Jr., & Fuller, R.R. *ASUPT automated objective performance measurement system*. AFHRL-TR-75-3, AD-A014 799. Williams AFB, AZ: Flying Training Division, Air Force Human Resources Laboratory, March 1975.
- Waters, B.K., Grunzke, P.M., Irish, P.A., & Fuller, J.H. Preliminary investigation of motion, visual and G-seat effects in the advanced simulator for undergraduate pilot training (ASUPT). Paper presented at the American Institute of Aeronautics and Astronautics Visual and Motion Simulation Conference, Dayton, OH: 26-28 April 1976.
- Wolff, H.H. The wide-angle visual simulation problem. *Commemorative Technical Journal*, November 1971.
- Young, L.R., Dichgans, J., Murphy, R., & Brandt, T. Interaction of optokinetic and vestibular stimuli in motion perception (Revised July 23, 1972). *ACTA Otolaryng*, 1973, 76, 24-31.
- Young, L.R., Oman, C.M., Curry, R.E., & Dichgans, J.M. A descriptive model of multi-sensor human spatial orientation with applications to visually induced sensations of motion. Paper presented at the American Institute of Aeronautics and Astronautics Visual and Motion Simulation Conference, Palo Alto, California, 10-12 September 1973.

BIBLIOGRAPHY

- Dunlap, D.S., & Worthey, R.E. *Air Force master plan simulators for aircrew training*. ASD/XR, TR-75-18. Andrews AFB, MD: September 1975.
- Kron, G.J. Motion simulation enhancement: the development of a research G-seat system. In *man-the focus of the training system*. *Proceedings of the Naval Training Equipment Center and Industry Conference*, 13-15 November 1973.
- Valverde, H.H. *Flight simulator, a review of the research and development*. AMRL-TR-68-97, AD-855 582. Wright-Patterson AFB, OH: July 1968.

APPENDIX A: DESCRIPTION OF PERFORMANCE MEASUREMENT ALGORITHMS

The performance measurement algorithms used in this study subdivided each maneuver into several exercise segments. For each exercise segment, special computer programs, labelled "cases," were developed that determined simulator system conditions and defined the parameters to be measured in that segment. The operation of these cases may be described in the following manner. An initialization case set the simulator at the maneuver starting conditions. Intermediate cases executed a FORTRAN program with a 3.75 Hertz iteration rate. These were used to sample system outputs. A special case was provided which measured the pilot outputs at an iteration rate of 15 Hertz. An end point case froze the simulator when the end conditions for the maneuver were met.

Descriptions of the performance measurement algorithms for the five maneuvers are as follows:

Takeoff: The starting condition for the takeoff was on centerline, Runway (RW) 30L at Williams AFB, with the aircraft configured for takeoff. The pilot set the power at 100%, released brakes, and maintained runway heading using nose-wheel steering. When the airspeed reached 65 knots, the aircraft was rotated to hold approximately five degrees pitch. The rotation speed was allowed to increase in high crosswinds. The aircraft lifted off at approximately 90 knots. The pilot was instructed to maintain the takeoff attitude as he raised the gear and flaps.

After the flaps were raised, the pilot adjusted the pitch to smoothly climb and accelerate to 1,900 feet above mean sea level (MSL) and 196 knots while maintaining runway heading. During this initial climb, the pilot also maintained vertical velocity between 500 and 1,000 feet per minute (FPM). After passing 1,900 feet MSL, the pilot continued the climb at tech order airspeed and turned to intercept the 302 degree radial outbound from the Chandler VOR. The maneuver was terminated and the simulator frozen after passing 3,000 feet MSL.

GCA and Landing: The starting condition was 2,400 feet MSL, 300 degree heading, and 160 knots on an eight mile final for Runway 30C, Williams AFB. The pilot maintained starting conditions until the Cognitronics Voice System began giving GCA "controller" instructions. The pilot slowed to 110 knots and lowered the landing gear and flaps at the appropriate airspeeds. He followed the "controller" heading instructions to maintain course. At 4.5 miles, the pilot intercepted the glidepath. The controller then gave information on aircraft position above or below and left or right of glidepath.

When the pilot had the runway in sight, he should have made appropriate corrections to maintain the extended centerline and glidepath visually. The pilot was instructed to land on the runway centerline, approximately 1,000 feet down the runway. The maneuver was terminated on landing roll after airspeed decreased below 50 knots.

360° Overhead Pattern and Landing: The starting condition was 2,500 feet MSL, 300° heading, and 200 knots on four mile initial for RW 30L, Williams AFB. The pilot flew down initial, maintaining altitude, airspeed, and runway centerline. Approximately halfway down the runway, the pilot pitched out by reducing power to 50 or 60% rpm and made a steep turn to the left not to exceed 60° bank. After completing a 180° turn, he lowered the speedbrake and landing gear, maintaining 2,500 feet MSL and 120 knots minimum. Approximately 3/4 mile past the end of the runway, he lowered the flaps and started a descending turn to the left. He was to maintain 110 knots minimum and adjust the bank and descent rate so as to roll out on runway centerline at 1,700 feet MSL.

Once on final approach, the pilot was told to maintain 100 knots minimum and a constant glidepath. He adjusted pitch and power so as to touch down in the first 1,000 feet of the runway between 75 and 80 knots. The maneuver terminated when airspeed decreased below 50 knots during rollout.

Slow Flight The starting condition was 12,000 feet MSL, 180° heading, and 100 knots. The pilot lowered speedbrake, landing gear, and full flaps while maintaining altitude and decreasing airspeed to 76 knots, approximately four knots above stalling airspeed. After holding airspeed for about 30 seconds, the Cognitronics Voice System directed him to start coordinated turns. The pilot performed shallow turns,

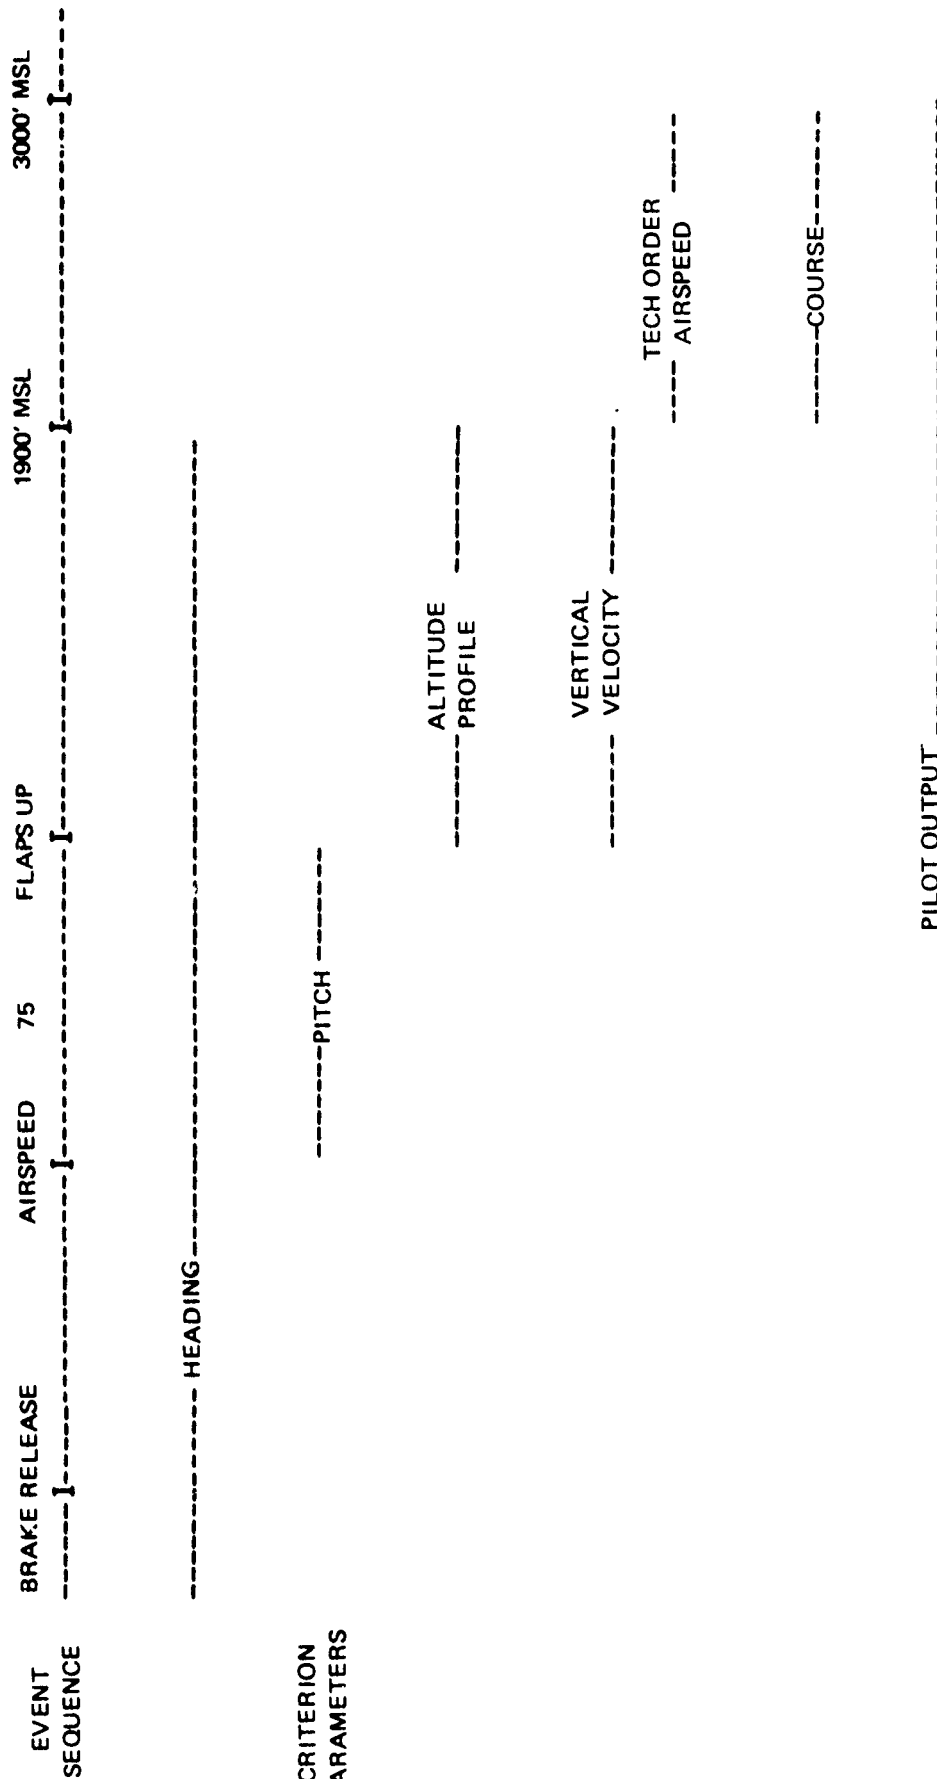


Figure A1. Takeoff scoring sequence.

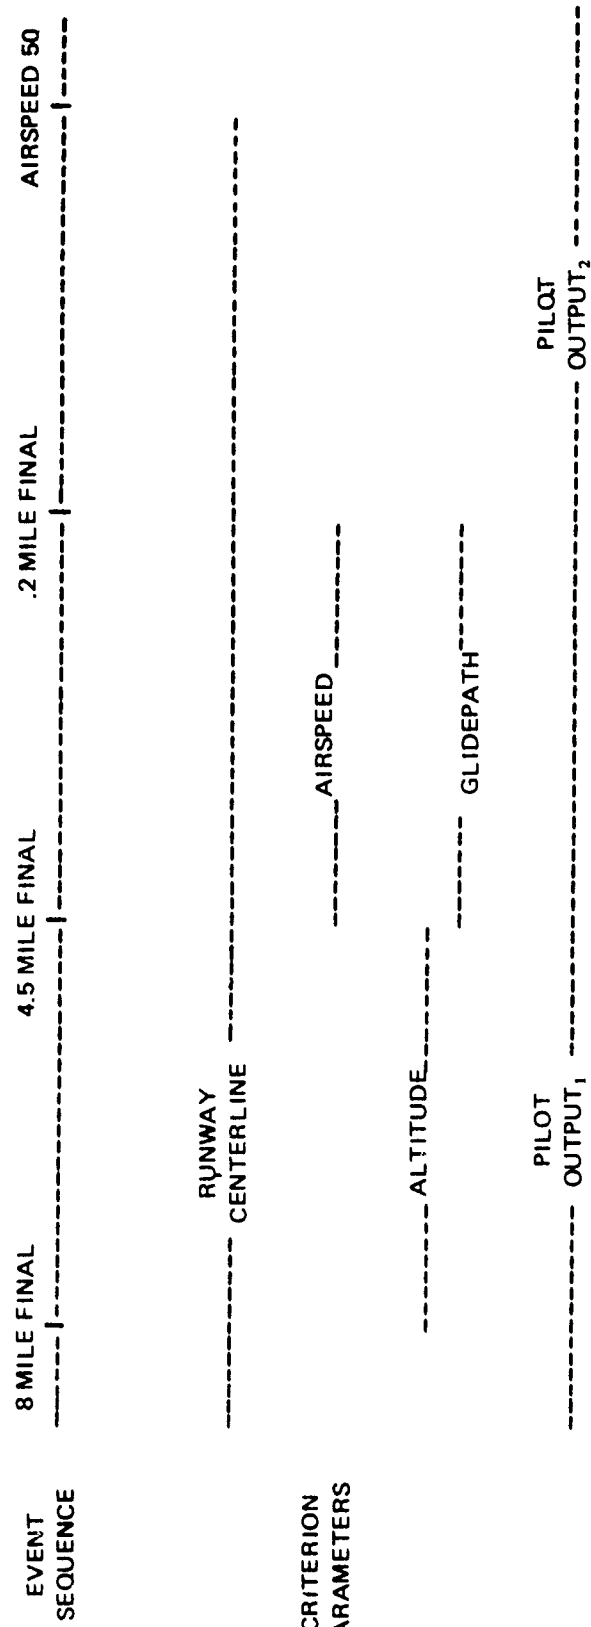


Figure A2. GCA and landing scoring sequence.

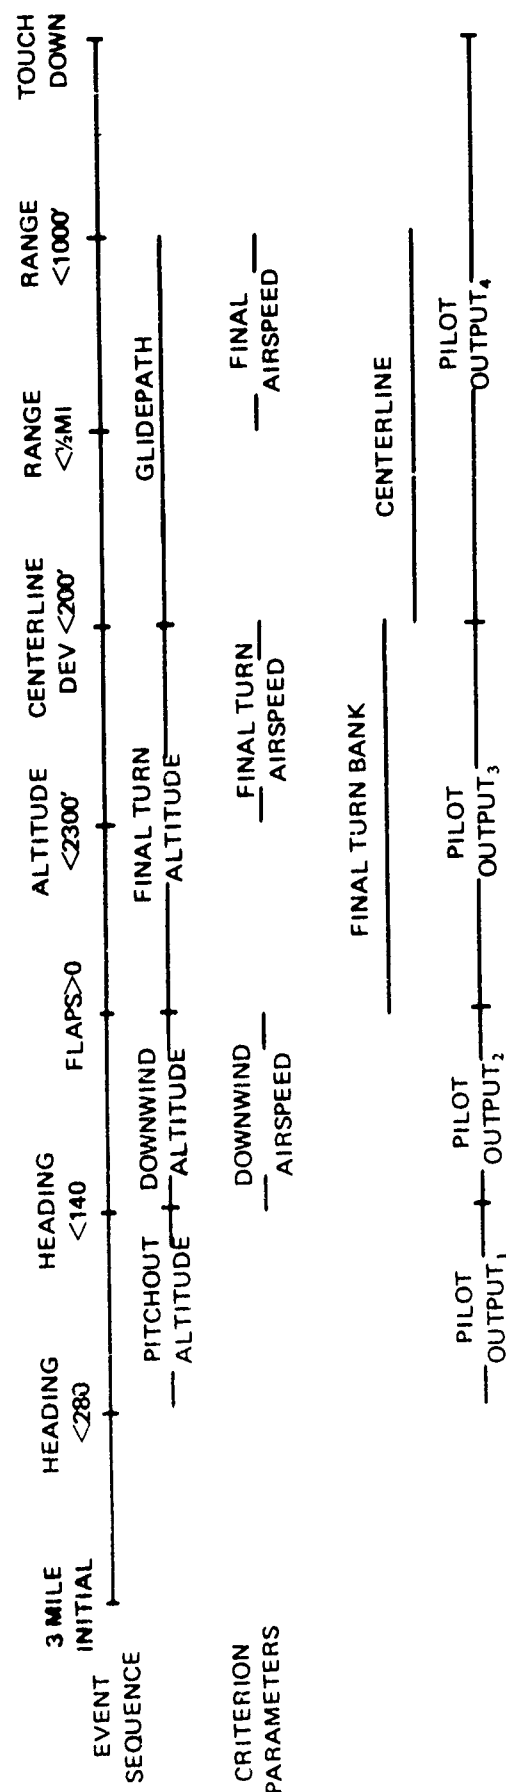


Figure A3. 360° Overhead pattern and landing scoring sequence.

turing approximately 20° to each side of a central reference point or heading. After three turns were accomplished, the exercise was terminated.

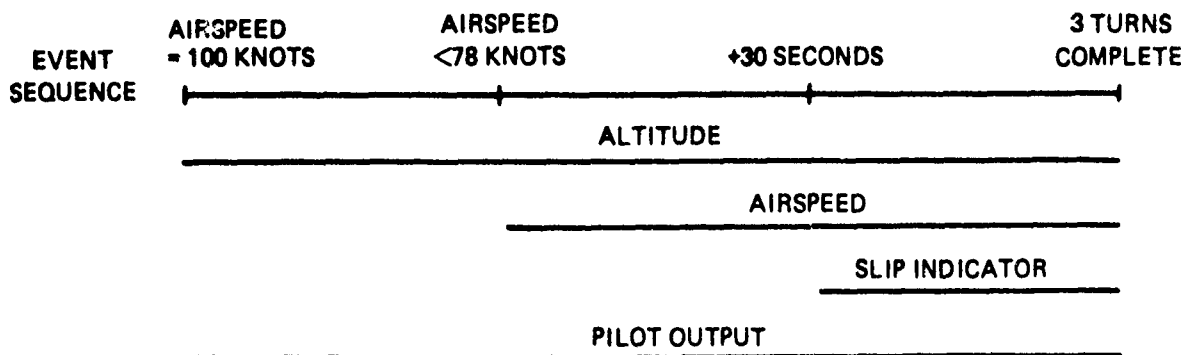


Figure A4. Slow flight scoring sequence.

Aileron Roll: The aileron roll was performed under two conditions:

1. *Instrument.* The starting condition was 15,000 feet, 160 knots, and 180° heading. The pilot lowered the nose to accelerate and set the power at 90%. He then raised the nose, so as to pass through level flight between 200 and 230 knots. He continued to bring the nose up smoothly with a wings level attitude until the nose was 25° above the horizon.

At this point, he started a roll in either direction, adjusting the roll rate as necessary so the wings were level in the inverted position as the nose passed through the horizon. He continued the roll and, after completing the maneuver in a nose-low, wings-level attitude, returned to level flight. At this point, the exercise was terminated.

2. *Contact.* The starting conditions, entry and airspeed and power setting were the same as in the instrument aileron roll. The entry pitch attitude was 20° to 30° . The roll was executed smoothly to maintain a constant roll rate. As the wings-level attitude was approached, aileron pressure was gradually released to roll out with the nose on the horizon. The exercise was terminated five seconds after the roll was complete.

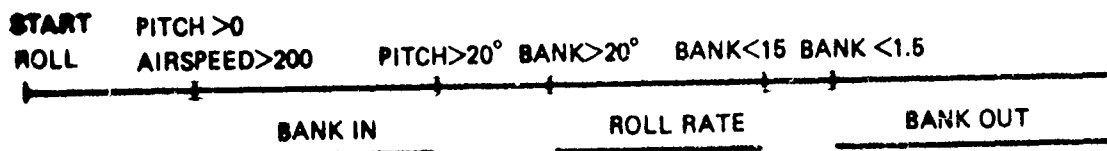


Figure A5. Aileron roll scoring sequence.

APPENDIX B: MULTIVARIATE ANALYSIS OF VARIANCE SOURCE TABLES (ALL MANEUVERS)

This appendix provides the original MANOVA output.

To facilitate understanding of this Appendix, the following guides are presented:

1. The order of the maneuvers is Takeoff, GCA, Overhead Pattern, Slow Flight, Aileron Roll.

2. Coding for independent variables was as follows:

$3^3 2^3$ Design

A = Wind

B = Turbulence

C = Motion

D = Ceiling/Visibility

E = Field of View

F = G-Seat

Blocks = Subjects

3^4 Design

A = Turbulence

P = Motion

C = Field of View

D = G-Seat

Blocks = Subjects

3. Coding for dependent variables is as follows:

Takeoff

Text Dependent Variable Name

Computer Dependent Variable Name

1. Heading Deviation

Head (2)

2. Pitch Deviation

To Att (2)

3. Course Deviation

Crs Dev (2)

4. Airspeed Deviation

KIAS (2)

5. Elevator Power

Elev Pwr (1)

6. Aileron Power

Ailr Pwr (1)

7. Rudder Power

Rudr Pwr (1)

GCA and Landing

1. Total Score

TT Score (1)

2. Touchdown Score

TD Score (1)

3. Altitude Deviation

AH (2)

4. Airspeed Deviation

KIAS (2)

5. Centerline Deviation

C L Dev (2)

6. Glidepath Deviation

G P Dev (2)

7. Elevator Power

Smooth 1 (7)

8. Aileron Power

Smooth 1 (8)

9. Rudder Power

Smooth 1 (9)

10. Elevator Power

Elev Pwr (1)

11. Aileron Power

Ailr Pwr (1)

12. Rudder Power

Rudr Pwr (1)

Overhead Pattern and Landing

1. Pitchout Altitude

ALT 1 (2)

2. Pitchout Bank

BNK 1 (2)

3. Elevator Power

Smooth 1 (7)

4. Aileron Power

Smooth 1 (8)

5. Rudder Power

Smooth 1 (9)

6. Downwind Altitude Deviation

ALT 2 (2)

7. Downwind Score

SCR 2 (2)

8. Elevator Power

Smooth 2 (7)

9. Aileron Power

Smooth 2 (8)

10. Rudder Power

Smooth 2 (9)

Overhead Pattern and Landing (Continued)

11. Final Turn Bank Deviation	BNK 3 (2)
12. Final Turn Airspeed Deviation	SPD 3 (2)
13. Elevator Power	Smooth 3 (7)
14. Aileron Power	Smooth 3 (8)
15. Rudder Power	Smooth 3 (9)
16. Glidepath Deviation	GSL 4 (2)
17. Centerline Deviation	CAE 4 (2)
18. Final Airspeed Deviation	SPD 4 (2)
19. Final Score	SCR 4 (1)
20. Elevator Power	Smooth 4 (7)
21. Aileron Power	Smooth 4 (8)
22. Rudder Power	Smooth 4 (9)
23. Landing Score	SCRL (1)

Slow Flight

1. Altitude Deviation	ALT (2)
2. Airspeed Deviation	KIAS (2)
3. Slip Indicator Deviation	Ball (2)
4. Total Score	Tot Scrc (1)
5. Elevator Power	Elev Pwr (1)
6. Aileron Power	Ailr Pwr (1)
7. Rudder Power	Rudr Pwr (1)

Aileron Roll

1. Roll In Deviation	Bank in (2)
2. Roll Acceleration	Smooth 2 (4)
3. Roll Score	Roll rate (1)
4. Bank Out Deviation	Bankout (2)
5. Aileron Power (In)	Smooth 1 (8)
6. Aileron Power (Roll)	Smooth 2 (8)
7. Aileron Power (Out)	Smooth 3 (8)
8. Total Score	Totscore (1)

MANOVA FOR MANEUVER OVRHD PATRN. TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	DEPENDENT VARIABLE	MEAN	A	B	C	D	E	F	AB	AC	AD
20 ALT1(2)		.3767+06	.1449+03	.1384+04	.4387+04	.6540+04	.1204+04	.5293+02	.4927+04	.2836+04	.6555+04
21 BNK1(2)		.2466+05	.2483+04	.2353+02	.3952+02	.1166+03	.2304+02	.2213+03	.8925+02	.9405+02	.4338+01
22 SMOOTH1(7)		.7695+03	.4135+02	.1895+01	.8159+01	.1398+01	.8050+01	.9194+01	.4606+01	.3424+01	.2692+01
23 SMOOTH1(8)		.6278+02	.3133+01	.1564+01	.1925+01	.8861+00	.6809+00	.4149+01	.3494+00	.2862+00	.8252+01
24 SMOOTH1(9)		.1129+01	.6382+01	.1159+00	.2371+01	.2395+01	.4454+01	.2527+01	.1692+00	.1500+00	.2769+01
25 ALT2(2)		.3492+06	.1707+04	.1918+04	.4752+04	.4148+04	.1639+03	.7258+02	.1149+04	.8698+03	.9078+03
26 SCR2(1)		.9599+06	.3056+04	.3083+04	.1430+04	.3015+04	.3133+04	.6366+02	.1236+04	.1292+04	.1171+04
27 SMOOTH2(7)		.9393+03	.3857+01	.2556+01	.1301+02	.3018+02	.5186+00	.4272+01	.8387+01	.2924+01	.1210+01
28 SMOOTH2(8)		.3173+03	.1512+01	.5446+00	.1700+02	.4462+01	.3159+01	.7209+00	.2959+01	.3485+00	.6263+00
29 SMOOTH2(9)		.2158+01	.6256+02	.4019+00	.1268+01	.7881+02	.1307+01	.5241+01	.6946+01	.6363+01	.5877+01
30 BNK3(2)		.2397+05	.1089+03	.2614+02	.4386+02	.1078+03	.1815+03	.1343+01	.6722+02	.7278+02	.1187+01
31 SPD3(2)		.7357+04	.7717+03	.8490+01	.9736+01	.1259+03	.1565+01	.7380+00	.5806+01	.1539+02	.4471+02
32 SMOOTH3(7)		.5756+03	.2669+02	.1388+01	.6590+01	.5607+01	.5391+01	.2730+01	.2325+01	.2593+01	.2217+01
33 SMOOTH3(8)		.1408+03	.1672+01	.5214+00	.5310+01	.8525+00	.1505+01	.1675+01	.6743+00	.1053+01	.4142+00
34 SMOOTH3(9)		.3841+02	.3727+01	.3289+00	.5041+00	.1895+01	.6382+01	.2270+01	.2433+01	.2087+00	.9525+00
35 GSL4(2)		.2861+03	.8251+01	.1879+01	.2334+00	.9266+00	.2669+01	.3138+01	.2040+01	.5519+01	.2402+00
36 CAE4(2)		.3760+07	.1697+06	.2702+05	.1810+04	.1067+06	.2330+06	.1534+06	.1450+06	.2002+06	.5571+04
37 SPD4(1)		.4976+04	.3878+03	.8736+02	.8666+00	.7083+02	.1082+03	.1767+01	.1581+02	.6093+02	.1668+02
38 SCR4(1)		.2284+05	.5274+04	.1028+03	.5742+03	.1253+04	.2335+03	.1076+04	.1335+04	.1168+04	.1324+04
39 SMOOTH4(7)		.1972+04	.1245+02	.2846+01	.1060+02	.5496+01	.6085+02	.1291+02	.2260+02	.7329+01	.1285+01
40 SMOOTH4(8)		.8242+03	.8091+02	.1155+01	.7283+01	.7576+01	.2757+01	.1362+01	.3830+01	.1174+01	.1810+01
41 SMOOTH4(9)		.5438+04	.1124+04	.7542+02	.3102+02	.2833+02	.1513+00	.4035+01	.3194+02	.4804+02	.2663+01
42 SCRL(1)		.1263+07	.8586+02	.1927 03	.3138+03	.8721+02	.2609+01	.5410+02	.7269+03	.9872+03	.3743+03
WILKS LAMBDA (WL)		.0029	.1064	.6028	.3924	.5452	.6969	.6504	.4348	.3956	.7050
DF1		23.0000	46.0000	46.0000	46.0000	23.0000	23.0000	23.0000	92.0000	92.0000	46.0000
DF2		94.0000	188.0000	188.0000	188.0000	94.0000	94.0000	94.0000	374.5601	374.5601	188.0000
FD (APPROX FOR WL)		1422.4308	8.44421	1.1769	2.4373	3.4100	1.7772	2.1967	.9534	1.0750	.7806
PROB(F>FO)		.0000	.0000	.2245	.0000	.0000	.0285	.0043	.6006	.3173	.8384

MANOVA FOR MANEUVER OVRHD PATRN. TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	AE	AF	BC	BD	BE	BF	CO	CE	CF	DE
DEPENDENT VARIABLE	2	2	4	2	2	2	2	2	2	1
20 ALT1(2)	.1348+04	.1043+04	.5407+03	.1397+03	.5955+02	.1074+04	.1693+04	.1050+04	.2455+04	.5504+03
21 BNK1(2)	.1191+02	.6778+02	.1992+03	.2082+02	.1361+02	.4965+01	.1022+01	.5293+01	.2473+03	.3547+02
22 SM00TH1(7)	.7383+01	.2179+01	.4330+01	.5552+01	.1672+01	.1687+00	.7640+02	.4556+01	.1064+02	.5671+01
23 SM00TH1(8)	.1992+00	.1231+00	.1892+01	.2558+00	.3376+02	.9681+01	.3733+00	.1247+01	.5607+00	.4712+01
24 SM00TH1(9)	.4191+01	.3039+00	.3337+00	.6273+01	.3817+01	.1822+01	.5926+01	.1579+00	.5109+01	.9336+01
25 ALT2(2)	.2794+03	.4294+03	.2125+04	.1036+04	.2641+03	.2709+04	.3036+03	.1960+03	.1473+04	.1397+00
26 SCR2(1)	.2258+04	.2651+03	.2003+04	.8302+02	.8363+03	.1998+04	.8476+03	.6376+03	.3387+04	.1019+02
27 SM00TH2(7)	.1234+01	.4014+01	.6556+01	.3296+00	.1255+01	.2620+01	.8220+00	.7271+00	.1940+02	.1302+00
28 SM00TH2(8)	.8384+00	.9467+00	.2166+01	.5069+00	.2076+01	.5259+01	.7903+00	.6798+01	.2346+01	.6350+00
29 SM00TH2(9)	.1781+00	.6914+01	.5699+01	.1778+01	.2052+01	.3222+01	.6392+01	.6840+02	.6064+03	.1255+01
30 BNK3(2)	.4147+01	.9316+02	.8951+02	.5739+02	.5075+02	.1189+03	.6320+02	.5510+02	.1546+02	.3941+02
31 SPD3(2)	.4023+02	.2107+02	.2313+03	.3841+02	.5422+01	.4456+01	.3392+02	.1219+02	.3494+01	.4636+01
32 SM00TH3(7)	.8362+02	.2471+01	.4365+01	.1955+00	.2047+01	.1850+01	.2506+01	.7697+00	.5209+01	.2942+01
33 SM00TH3(8)	.1595+01	.9959+02	.1195+01	.7144+00	.9709+01	.2389+00	.3284+00	.4398+00	.2088+00	.6740+03
34 SM00TH3(9)	.7065+00	.1055+00	.2900+01	.1158+01	.9053+00	.1567+01	.5211+00	.4373+00	.3377+01	.3554+00
35 GSL4(2)	.1166+01	.1277+01	.7205+01	.4328+01	.1751+01	.2150+01	.6295+01	.2808+01	.2139+01	.8571+00
36 CAE4(2)	.4749+05	.7166+05	.4158+06	.4534+06	.1547+04	.5336+05	.1132+06	.9139+05	.7554+05	.5122+04
37 SPD4(2)	.5210+01	.1788+01	.1375+03	.4562+02	.8017+01	.3963+02	.1554+02	.2015+02	.5932+02	.1534+01
38 SCR4(1)	.1573+03	.4911+03	.3006+04	.1583+04	.1950+04	.4888+03	.6783+02	.7513+03	.8394+03	.6719+03
39 SM00TH4(7)	.3289+01	.5709+00	.5436+01	.2170+00	.6937+00	.1640+01	.3605+00	.4437+01	.1111+02	.1864+01
40 SM00TH4(8)	.1956+01	.2104+01	.2649+01	.3719+01	.1925+01	.1500+01	.1041+01	.2276+01	.9340+00	.8172+00
41 SM00TH4(9)	.2123+02	.5576+01	.3165+02	.1012+02	.3816+02	.3592+01	.8994+01	.1333+02	.1037+01	.1899+02
42 SCRL(1)	.3592+03	.8992+01	.1670+04	.1785+02	.2035+02	.1431+02	.3577+02	.2881+03	.8173+02	.1750+03
WILKS LAMBDA (WL)	.6583	.7193	.3124	.6404	.6949	.6452	.6858	.6327	.4947	.7747
DF1	46.0000	46.0000	92.0000	46.0000	46.0000	46.0000	46.0000	46.0000	46.0000	23.0000
DF2	188.0000	188.0000	374.5601	188.0000	188.0000	188.0000	188.0000	188.0000	188.0000	94.0000
FO (APPROX FOR WL)	.9503	.7319	1.3913	1.0200	.8157	1.0011	.8482	1.0513	1.7240	1.1889
PROB(F>F0)	.5677	.8940	.0177	.4475	.7905	.4794	.7412	.3965	.0061	.2744

MANOVA FOR MANUEVER OVRHD PATTN. TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	DEPEND VARIABLE	DF	EF	BLOCKS	ARD	ABE	ABF	ACD	ACE	ACF	ADE
		1	2	4	4	4	4	4	4	4	2
20 ALT1(2)		.5747+03	.1213+04	.1593+04	.6922+03	.1880+04	.2890+04	.9472+03	.2380+04	.2022+04	.2970+04
21 UNK1(2)		.1110+03	.1197+07	.3103+03	.6759+02	.4567+02	.4981+02	.2185+02	.4175+02	.8880+02	.5953+02
22 SMOOTH1(7)		.4905+01	.1864+02	.4930+02	.4703+01	.5682+01	.6293+01	.6678+01	.8358+01	.1270+02	.3519+01
23 SMOOTH1(8)		.3523+00	.7774+04	.9861+01	.4239+00	.6049+00	.6021+00	.3919+00	.1670+00	.1600+01	.2115+01
24 SMOOTH1(9)		.3915+02	.3124+01	.9041+01	.1310+00	.1636+00	.2088+00	.4301+00	.2008+00	.1797+00	.1574+00
25 ALT2(2)		.1387+04	.5333+03	.5620+04	.9684+03	.9340+03	.2830+04	.1477+04	.7143+02	.3355+02	.2856+04
26 SCR2(1)		.1350+04	.1674+01	.1714+04	.2262+04	.1929+04	.3187+04	.1693+04	.8554+03	.1230+04	.2167+04
27 SMOOTH2(7)		.2594+01	.6858+00	.2879+01	.1423+01	.1303+01	.3597+01	.7904+01	.3137+01	.7200+01	.5922+00
28 SMOOTH2(8)		.1413+01	.2771+01	.4266+02	.2262+01	.3592+01	.6780+00	.2725+01	.1667+01	.3945+00	.6674+00
29 SMOOTH2(9)		.7713+02	.1094+03	.4884+00	.2508+00	.1602+00	.1459+01	.1084+00	.7957+01	.8952+01	.2173+01
30 RNK3(2)		.1964+02	.1272+03	.2362+03	.3530+02	.3766+02	.9248+02	.8923+02	.1072+03	.6563+02	.5360+02
31 SP03(2)		.1657+01	.2962+02	.3673+03	.3617+02	.5440+01	.2868+01	.1787+02	.1648+02	.4839+02	.1430+02
32 SMOOTH3(7)		.2589+01	.1136+01	.7024+02	.6448+01	.4547+01	.3655+01	.1659+01	.1385+01	.4449+01	.1017+01
33 SMOOTH3(8)		.4581+00	.1303+03	.1196+01	.3869+00	.3296+00	.1213+01	.1530+01	.5489+00	.1224+01	.3710+01
34 SMOOTH3(9)		.9405+02	.5826+00	.2273+02	.1184+01	.2262+01	.5570+01	.2008+01	.1444+01	.2858+01	.8214+00
35 GSL4(2)		.1403+03	.2430+01	.1312+02	.6590+01	.4568+01	.3314+01	.7658+01	.2359+01	.1626+01	.5288+00
36 CAE4(2)		.3163+05	.4488+06	.2481+06	.4997+06	.1298+06	.1587+06	.2777+06	.1843+06	.2093+06	.4617+05
37 SP04(2)		.4686+02	.5661+01	.8204+02	.6187+02	.1865+02	.5234+02	.5565+02	.1364+02	.4588+02	.1861+01
38 SCR4(1)		.2175+02	.1739+02	.5264+04	.1850+04	.2648+04	.6034+03	.1186+04	.2639+03	.4711+03	.7589+03
39 SMOOTH4(7)		.5802+01	.2789+01	.1293+03	.8594+01	.4341+01	.6617+01	.1500+01	.6448+01	.1466+02	.1951+00
40 SMOOTH4(8)		.1698+00	.1570+00	.5603+02	.3752+01	.5733+01	.1688+01	.1068+01	.3799+01	.6941+01	.6884+00
41 SMOOTH4(9)		.7779+01	.1362+01	.2249+03	.5435+01	.3317+02	.7768+01	.7893+01	.1779+02	.1853+02	.1907+02
42 SCRL(1)		.4323+02	.1470+03	.1075+04	.1671+03	.2785+03	.1378+03	.1611+02	.2557+03	.1423+03	.5226+01

WILKS LAMBDA (WL)	.7166	.7466	.496	.4283	.4369	.4451	.4645	.5167	.4085	.6135
DF1	23.0000	23.0000	46.0000	92.0000	92.0000	92.0000	92.0000	92.0000	92.0000	46.0000
DF2	94.0000	94.0000	188.0000	374.5601	374.5601	374.5601	374.5601	374.5601	374.5601	188.0000
FOI APPROX FOR WL	.6159	1.3872	14.2180	.9728	.9475	.9238	.8702	.7391	1.0333	1.1309
PROB(F>F)	.0563	.1382	.0000	.5532	.6150	.6715	.7878	.9595	.4080	.2807

MANOVA FOR MANEUVER OVRHD PATTN. TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	ADP	AEF	BCD	BCE	BCF	BDE	BDF	BEF	COE	COF
DEPENDENT VARIABLE	2	2	4	4	4	2	2	2	2	2
20 ALT1(2)	.2783+03	.5087+04	.3936+04	.3326+04	.3566+04	.3491+03	.8102+03	.1128+04	.6160+03	.5538+03
21 BNK1(2)	.2415+02	.3011+01	.3102+02	.5640+01	.2740+02	.2343+01	.1239+02	.3168+02	.2377+01	.5405+02
22 SMOOTH1(7)	.6146+00	.3659+00	.8183+01	.1810+01	.2290+01	.3639+01	.7048+00	.1099+01	.3545+00	.1044+01
23 SMOOTH1(8)	.3976+01	.2585+00	.5900+00	.1508+00	.4169+00	.9748+01	.2864+01	.8053+01	.1276+01	.1122+01
24 SMOOTH1(9)	.6800+01	.6160+01	.4224+01	.2515+00	.1177+00	.3940+01	.1091+00	.1306+00	.3419+01	.3133+00
25 ALT2(2)	.4330+03	.2406+04	.3997+04	.1547+04	.2837+04	.9645+03	.7600+03	.4519+03	.1182+04	.2466+03
26 SCR2(1)	.3386+04	.3972+03	.2171+04	.1237+04	.3598+04	.8159+03	.5846+03	.2095+03	.3490+04	.8270+02
27 SMOOTH2(7)	.2125+00	.1863+01	.6268+01	.3764+01	.1184+02	.1131+01	.4201+01	.3507+01	.2014+01	.4406+01
28 SMOOTH2(8)	.1672+01	.2568+01	.2155+01	.1386+01	.3462+01	.3918+00	.1012+01	.2515+01	.1400+00	.1087+01
29 SMOOTH2(9)	.1385+01	.1072+00	.2290+00	.2494+00	.1183+00	.3386+00	.9960+02	.1485+01	.3829+01	.1390+00
30 BNK3(2)	.3264+02	.8660+01	.1216+03	.7140+02	.3565+02	.1628+02	.1271+02	.1624+03	.3970+02	.8061+02
31 SPD3(2)	.1156+01	.1491+02	.1070+02	.1877+02	.4215+02	.2615+00	.2039+02	.1367+02	.2279+01	.4429+01
32 SMOOTH3(7)	.4508+00	.4852+01	.2730+01	.2643+01	.2985+00	.9132+00	.8586+00	.2372+00	.6824+00	.7547+00
33 SMOOTH3(8)	.6685+00	.1506+00	.1235+00	.6963+00	.5466+00	.1193+00	.8735+00	.5764+00	.2170+01	.5393+00
34 SMOOTH3(9)	.1958+00	.1615+01	.2786+01	.8621+00	.1155+01	.1775+00	.5283+00	.1059+01	.5217+00	.7039+00
35 GSL4(2)	.1863+00	.3857+01	.4344+01	.8739+01	.7624+01	.2989+01	.7124+01	.8096+00	.4135+01	.2372+01
36 CAE4(2)	.5105+05	.2667+04	.2292+06	.3955+06	.2875+06	.1146+06	.1968+06	.1676+05	.1386+06	.3321+05
37 SPD4(2)	.1615+02	.3613+07	.1201+03	.3765+02	.5238+02	.4864+01	.7042+01	.1103+02	.1298+02	.2946+01
38 SCR4(1)	.6250+03	.5013+02	.1897+04	.8055+03	.3515+03	.9873+02	.1230+03	.6047+03	.1371+03	.2844+03
39 SMOOTH4(7)	.9425+00	.3200+01	.1187+01	.6234+01	.1663+01	.1528+00	.1403+01	.1056+01	.5704+00	.6403+01
40 SMOOTH4(8)	.1534+01	.1184+01	.1862+01	.9294+01	.3505+01	.2328+01	.8438+00	.1790+01	.2248+01	.5196+01
41 SMOOTH4(9)	.1843+02	.5178+01	.1524+02	.3223+01	.7315+02	.2147+02	.1336+02	.1789+02	.2083+02	.2644+02
42 SCRL(1)	.2493+03	.5271+03	.5346+03	.2876+03	.2489+03	.1104+03	.2460+01	.5302+03	.7470+01	.6190+02
WILKS LAMBDA (WL)	.6900	.6645	.4379	.5102	.4593	.6996	.7904	.6595	.7542	.6624
DEFA	.46+0000	.46+0000	.92+0000	.92+0000	.92+0000	.46+0000	.46+0000	.46+0000	.46+0000	.46+0000
OF2	.188+0000	.188+0000	.374+5601	.374+5601	.374+5601	.188+0000	.188+0000	.188+0000	.188+0000	.188+0000
FOI (APPROX FOR WL)	.8332	.9267	.9444	.7546	.8843	.7994	.5100	.9455	.6192	.9346
PROB(F>FO)	.7644	.6090	.6225	.9481	.7591	.8135	.9959	.5760	.9718	.5952

MANOVA FOR MANEJVER OVERD PATTRY. TABLE 6. TRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	DF	SS	MS	F	ERROR
DEPENDENT VARIABLE	DF	SS	MS	F	ERROR
20 ALT1(2)	1	7179+02	7179	2271+05	7496+05
21 BAK1(2)	1	6708+02	6708	2053+02	1694+04
22 SMOOTH1(7)	6	7122+01	1187	2396+01	1328+03
23 SMOOTH1(8)	7	3243+01	463	2257+01	1477+02
24 SMOOTH1(9)	8	1425+00	178	1232+01	4949+01
25 ALT2(2)	1	7030+03	7030	1116+05	5567+05
26 SCR2(1)	1	9857+03	9857	1169+05	6207+05
27 SMOOTH2(7)	6	7776+00	1296	1570+01	1324+03
28 SMOOTH2(8)	7	3870+01	553	4334+02	8339+02
29 SMOOTH2(9)	8	1145+00	143	3677+01	3276+01
30 BAK3(2)	1	1104+03	1104	7197+02	2472+04
31 SPD3(2)	1	8756+01	8756	1160+02	1077+04
32 SMOOTH3(7)	6	1621+01	270	6577+01	9055+02
33 SMOOTH3(8)	7	1203+00	172	5230+00	2637+02
34 SMOOTH3(9)	8	1080+01	135	4762+00	4657+02
35 GSL4(2)	1	918+01	918	5155+01	1447+03
36 CAE4(2)	1	4377+05	4377	5523+03	7270+07
37 SPD4(2)	1	1571+02	1571	1624+02	1623+04
38 SCR4(1)	1	1971+04	1971	4356+01	3653+05
39 SMOOTH4(7)	6	2105+01	351	7601+01	2422+03
40 SMOOTH4(8)	7	1427+01	204	3418+01	1190+03
41 SMOOTH4(9)	8	1326+01	166	2207+00	1133+04
42 SCRL(1)	1	2120+03	2120	7844+01	1326+05

WILKS LAMBDA (WL) 5973 .5866
 DF1 46.0000 23.0000
 DF2 188.0000 94.0000
 F01 APPROX FOR WL) 1.210 2.8402
 PROB(F>F0)1986 .0002

MANOVA FOR MANEUVER SLOW FLIGHT . TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	DEPENDENT VARIABLE	MEAN	A	B	C	D	AB	AC	AD	BC	BD
1	ALT(2)	.1560+06	.2212+04	.6139+04	.2460+04	.1876+04	.1263+04	.2141+04	.6036+03	.1414+04	.9310+03
2	KLAS(2)	.2980+03	.5464+01	.8922+00	.2305+01	.5216-01	.1530+01	.1990+01	.2934+01	.6355+00	.1020+01
3	RALL(2)	.4224+01	.1117-02	.1015-01	.1103-02	.4812-02	.1249-01	.2799+03	.4797-02	.3294-03	.7634-02
4	TOTSCORE(1)	.7817+05	.2488+04	.2132+04	.3343+03	.2628+03	.3721+03	.7955+03	.6761+03	.2856+03	.1203+04
5	ELEV PAR(1)	.4226+02	.1253+01	.9887+00	.5206+00	.2476+00	.5127+00	.1904+00	.8136+00	.3093+00	.1543+01
6	AILR PAR(1)	.1510+02	.2275+00	.1393+01	.6397+00	.3788-01	.2264+00	.1430+00	.6382-01	.1036+01	.1090+00
7	RUDR PAR(1)	.2922+00	.2025-02	.1413-01	.3614-02	.1469-02	.7537-02	.1264-01	.2158-01	.9126-02	.1116-01
WILKS LAMBDA (WL)		.0010	.2164	.0675	.2661	.5389	.1660	.2532	.2026	.1469	.1025
DF1		7.0000	14.0000	14.0000	14.0000	14.0000	28.0000	28.0000	28.0000	28.0000	28.0000
DF2		8.0000	16.0000	16.0000	16.0000	16.0000	30.2666	30.2666	30.2666	30.2666	30.2666
F01APPROX FOR WL		1134.7796	1.3141	3.2545	1.0727	.4139	.6977	.5013	.6022	.7589	.9521
PROB(F>F0)		.0000	.2976	.0132	.4424	.9478	.8296	.9653	.9099	.7674	.5502

SOURCE	DEPENDENT VARIABLE	CD	BLOCKS	ABC	ABD	ACD	BCD	ERROR
1	ALT(2)	.1427+04	.5697+04	.3459+04	.5520+04	.8952+03	.2242+04	.6913+04
2	KLAS(2)	.2380+01	.4529+01	.2208+01	.1341+01	.3664+01	.5679+01	.5661+01
3	RALL(2)	.2015-01	.5200-01	.1994-01	.5302-01	.5713-01	.1613-01	.9593-01
4	TOTSCORE(1)	.4741+03	.2258+04	.2613+04	.1660+04	.2549+04	.1031+04	.1693+04
5	ELEV PAR(1)	.1551+00	.1484+01	.3409+01	.1093+01	.1150+01	.1821+01	.2104+01
6	AILR PAR(1)	.2792+00	.7634+00	.2709+00	.4030+00	.4694+00	.4314+00	.6813+00
7	RUDR PAR(1)	.1065-01	.7753-02	.3481-01	.4793-01	.8023-01	.3380-01	.7948-01
WILKS LAMBDA (WL)		.1180	.0662	.0200	.0262	.0463	.0414	
DF1		28.0000	14.0000	56.0000	56.0000	56.0000	56.0000	
DF2		30.2666	16.0000	48.3923	48.3923	48.3923	48.3923	
F01APPROX FOR WL		.8746	3.2981	.9227	.8358	.6647	.6965	
PROB(F>F0)		.6380	.0124	.6162	.7424	.9297	.9041	

ANOVA FOR MANEUVER AILERON ROLL. TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
DEPENDENT VARIABLE	MEAN	A	R	C	D	AB	AC	AD	BC	BD					
8 BANKIN(2)	.3421+03	.3981+01	.1261+02	.2483+01	.1390+01	.9336+01	.2368+01	.6537+01	.1584+02	.7752+01					
9 SMOOTH2(4)	.1297+05	.7027+02	.2438+03	.4143+03	.7531+01	.5272+02	.5675+02	.3101+02	.2260+03	.2118+03					
10 ROLLRATE(1)	.1201+06	.5143+03	.2453+03	.4233+03	.7614+03	.1477+04	.1714+04	.1908+03	.1032+04	.2084+04					
11 BANKOUT(2)	.9840+03	.2869+01	.1597+02	.4154+01	.2852+01	.1343+02	.1529+02	.8313+01	.6969+01	.4923+01					
12 SMOOTH1(8)	.2302+03	.2714+01	.1036+02	.1989+02	.5102+01	.6221+01	.8663+01	.1309+01	.1393+02	.1343+02					
13 SMOOTH2(8)	.1391+03	.2390+01	.3747+01	.1108+02	.1278+01	.4862+01	.6570+01	.3373+00	.7251+01	.7697+01					
14 SMOOTH3(8)	.1154+03	.3648+01	.5747+01	.5635+00	.3203+01	.4160+01	.7650+01	.3770+01	.3246+01	.1189+02					
15 TOTSCORE(1)	.6551+05	.2243+02	.3200+04	.1704+04	.6182+02	.2044+04	.6812+03	.4827+03	.2285+04	.7417+03					
WILKS LAMBDA (WL)	.0013	.1628	.0413	.0674	.2302	.0506	.0925	.0789	.0432	.0266					
DF1	8.0000	16.0000	16.0000	16.0000	16.0000	32.0000	32.0000	32.0000	32.0000	32.0000					
DF2	7.0000	14.0000	14.0000	14.0000	14.0000	27.4099	27.4099	27.4099	27.4099	27.4099					
FO (APPROX FOR WL)	.6766+05	1.2938	3.4311	2.4965	.9489	1.0675	.7769	.8490	1.1520	1.4330					
PROB(F>FO)	.0000	.3171	.0127	.0463	.5444	.4340	.7552	.6741	.3554	.1703					

SOURCE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
DEPENDENT VARIABLE	MEAN	A	R	C	D	AB	AC	AD	BC	BD					
8 BANKIN(2)	.7479+01	.4895+01	.1893+02	.3280+01	.6265+01	.1589+02	.3134+02	.1589+02	.3134+02	.3134+02					
9 SMOOTH2(4)	.1633+03	.1612+03	.1820+03	.6184+03	.2683+03	.3319+03	.6560+03	.3319+03	.6560+03	.6560+03					
10 ROLLRATE(1)	.2509+03	.1142+05	.1686+04	.2217+04	.3433+04	.2699+04	.6053+04	.2699+04	.6053+04	.6053+04					
11 BANKOUT(2)	.1839+02	.5342+01	.2426+02	.2856+02	.1530+02	.2212+02	.2782+02	.2212+02	.2782+02	.2782+02					
12 SMOOTH1(8)	.1096+02	.1860+02	.1501+02	.4562+02	.1978+02	.1647+02	.6017+02	.1647+02	.6017+02	.6017+02					
13 SMOOTH2(8)	.5440+01	.1149+01	.1319+02	.1970+02	.1135+02	.9134+01	.2503+02	.9134+01	.2503+02	.2503+02					
14 SMOOTH3(8)	.9932+01	.7852+01	.1566+02	.2834+02	.1460+02	.1172+02	.1400+02	.1172+02	.1400+02	.1400+02					
15 TOTSCORE(1)	.2352+04	.8233+04	.2797+04	.1232+04	.2727+04	.1912+04	.2504+04	.1912+04	.2504+04	.2504+04					
WILKS LAMBDA (WL)	.0349	.0109	.0018	.0127	.0077	.0085	.0077	.0085	.0077	.0085					
DF1	32.0000	16.0000	64.0000	64.0000	64.0000	64.0000	64.0000	64.0000	64.0000	64.0000					
DF2	27.4099	14.0000	46.8662	46.8662	46.8662	46.8662	46.8662	46.8662	46.8662	46.8662					
FO (APPROX FOR WL)	1.2716	7.4982	1.4534	.8296	.9716	.9424	.9716	.9424	.9716	.9424					
PROB(F>FO)	.2627	.0002	.0904	.7583	.5475	.5916	.5475	.5916	.5475	.5916					

MANOVA FOR MANEUVER TAKE-OFF . TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	DEPENDENT VARIABLE	MEAN	A	B	C	D	E	F	AB	AC	AD
1 HEAD(2)	1 HEAD(2)	2479+04	4478+03	7098+00	3768+00	3094+02	2721+01	5936+00	2222+01	1333+01	499+01
2 TO ATT(2)	2 TO ATT(2)	7239+03	1566+01	1611+01	2389+01	3496+00	1499+00	3632+01	5916+00	1862+00	181+01
3 CRS DEV(2)	3 CRS DEV(2)	2662+03	5052+01	2111+01	3832+01	3881+00	2964+01	1660+01	3131+01	1094+02	3945+01
4 KIAS(2)	4 KIAS(2)	5554+04	2901+02	1022+02	1073+03	4187+03	4348+02	6803+02	3310+02	2784+02	9917+01
5 ELEV PAR(1)	5 ELEV PAR(1)	1408+04	1628+01	3194+01	1468+01	2180+01	6146+00	1357+01	2900+01	9156+00	2390+00
6 AILR PAR(1)	6 AILR PAR(1)	1325+03	4998+01	7946+00	5378+01	8734+00	1559+01	3762+00	1375+01	5729+00	5902+01
7 RUDD PAR(1)	7 RUDD PAR(1)	3817+02	2421+01	4835+00	7194+00	1836+01	1280+01	6190+00	8539+00	2859+00	1430+00
WILKS LAMBDA (WL)	WILKS LAMBDA (WL)	0.139	1468	7885	6165	6189	8633	7127	7461	7961	8456
DF1	DF1	7.0000	14.0000	14.0000	14.0000	7.0000	7.0000	7.0000	28.0000	28.0000	14.0000
DF2	DF2	110.0000	220.0000	220.0000	220.0000	110.0000	110.0000	110.0000	398.0328	398.0328	220.0000
FO(APPROX FOR WL)	FO(APPROX FOR WL)	1116.0026	25.0205	1.9827	4.3000	9.6774	2.4877	6.3334	1.2028	9.281	1.3742
PROB(F>F0)	PROB(F>F0)	0.0000	0.0000	0.0202	0.0000	0.0000	0.0207	0.0000	0.2223	0.5738	0.1673

SOURCE	DEPENDENT VARIABLE	MEAN	AE	AF	BC	BD	BE	BF	CD	CE	CF	DE
1 HEAD(2)	1 HEAD(2)	1004+01	1060+01	7898+01	1203+01	1203+01	6676+01	4256+01	2809+00	4935+01	1745+01	7514+01
2 TO ATT(2)	2 TO ATT(2)	4208+00	2655+01	5134+01	1035+01	1035+01	4571+00	7467+00	6668+00	1756+01	5191+01	4516+01
3 CRS DEV(2)	3 CRS DEV(2)	5138+01	2256+01	9662+00	1758+01	1758+01	1728+01	2529+01	2863+00	5127+01	6120+01	4728+01
4 KIAS(2)	4 KIAS(2)	3668+02	9503+01	1169+03	1758+01	1758+01	9825+00	2568+02	6047+02	3895+02	2319+02	4433+01
5 ELEV PAR(1)	5 ELEV PAR(1)	1347+00	5885+00	2767+01	3237+00	3237+00	1015+00	5397+00	5837+00	2475+01	1219+01	3925+03
6 AILR PAR(1)	6 AILR PAR(1)	1787+00	1671+00	9034+00	4441+01	4441+01	1661+02	1934+00	4284+00	1403+01	3186+00	2961+00
7 RUDD PAR(1)	7 RUDD PAR(1)	1670+01	7048+01	5482+00	6170+02	6170+02	4170+01	8967+01	4397+01	1692+00	8124+00	5727+00
WILKS LAMBDA (WL)	WILKS LAMBDA (WL)	0.8776	9304	6393	9480	9480	9647	8632	9095	7879	6673	9352
DF1	DF1	14.0000	14.0000	28.0000	14.0000	14.0000	14.0000	14.0000	14.0000	14.0000	14.0000	7.0000
DF2	DF2	220.0000	220.0000	398.0328	220.0000	220.0000	220.0000	220.0000	220.0000	220.0000	220.0000	110.0000
FO(APPROX FOR WL)	FO(APPROX FOR WL)	1.0597	5768	1.8778	4250	4250	2550	1.1989	7.633	1.9887	3.5227	1.0887
PROB(F>F0)	PROB(F>F0)	0.3959	0.816	0.0050	0.9657	0.9657	0.9951	0.2775	0.7081	0.0197	0.0000	0.3749

SOURCE	DEPENDENT VARIABLE	MEAN	DF	EF	BLOCKS	ABD	ABE	ADF	ACD	ACE	ACF	ADE
1 HEAD(2)	1 HEAD(2)	7666+03	1375+00	1342+02	1167+01	1167+01	2923+00	1134+01	3775+01	1387+01	1931+01	1209+00
2 TO ATT(2)	2 TO ATT(2)	4781+02	5549+00	2670+02	1613+01	1613+01	1451+01	3512+01	2134+01	1079+00	2347+00	1010+01
3 CRS DEV(2)	3 CRS DEV(2)	6518+00	9343+01	5931+01	1899+01	1899+01	5448+01	4247+01	2533+01	6176+01	1176+02	8099+00
4 KIAS(2)	4 KIAS(2)	3886+01	5156+01	3954+03	7319+02	7319+02	2913+02	6401+02	1712+02	3278+02	3403+02	2179+01
5 ELEV PAR(1)	5 ELEV PAR(1)	4109+01	4776+00	8937+00	4041+01	4041+01	2210+01	3235+00	3263+01	5414+01	6392+00	3122+01
6 AILR PAR(1)	6 AILR PAR(1)	1169+01	1856+02	3180+01	9261+00	9261+00	7877+00	8891+00	4216+00	1143+01	1027+01	2311+00
7 RUDD PAR(1)	7 RUDD PAR(1)	2199+02	2439+02	1575+01	7462+00	7462+00	4077+00	3402+00	5443+00	6021+00	2012+00	4809+01
WILKS LAMBDA (WL)	WILKS LAMBDA (WL)	0.8993	8999	2865	7530	7530	8033	7837	7979	7396	7775	8798
DF1	DF1	7.0000	7.0000	14.0000	28.0000	28.0000	28.0000	28.0000	28.0000	28.0000	28.0000	14.0000
DF2	DF2	110.0000	110.0000	220.0000	398.0328	398.0328	398.0328	398.0328	398.0328	398.0328	398.0328	220.0000
FO(APPROX FOR WL)	FO(APPROX FOR WL)	1.7602	1.7602	13.6419	1.1635	1.1635	8901	9940	9186	1.2403	1.0275	1.0391
PROB(F>F0)	PROB(F>F0)	0.1025	0.1025	0.0000	0.2616	0.2616	0.6303	0.4766	0.5879	0.1890	0.4291	0.4156

ANOVA FOR MULTIVARIATE TAKE-OFF TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	1477	1478	1479	1480
--------	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------

FT MOTION/VISUAL/G-SEAT INTERACTIONS : STUDY 1 2003 X 3003 DESIGN - 5984

MANOVA FOR MAN-EUV-4 GCA TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES.

SOURCE	DEPENDENT VARIABLE	MEAN	A	B	C	D	E	F	AB	AC	AD
8 TT SCORE(1)	1	2	2	2	2	1	1	1	4	4	2
8 TT SCORE(1)	.1324+06	.1820+03	.5059+03	.7713+03	.1021+04	.1872+02	.3545+03	.2392+03	.4809+03	.6567+02	
9 TD SCORE(1)	.1509+07	.2399+04	.5029+03	.8679+02	.3905+03	.8848+02	.3751+02	.8294+03	.5859+03	.9528+02	
10 ALT(2)	.3385+06	.2388+03	.3166+04	.4723+04	.1458+03	.1261+04	.4200+04	.7911+03	.9567+03	.1894+04	
11 KIAS(2)	.1448+04	.8097+01	.4386+02	.1202+02	.3880+02	.3352+01	.2760+01	.4374+01	.5457+00	.6402+00	
12 C L DEV(2)	.2233+07	.3901+04	.1314+04	.3055+04	.9521+04	.1155+04	.8762+04	.1303+04	.4429+04	.5721+02	
13 G P DEV(2)	.2793+06	.8368+03	.4724+03	.1958+02	.3580+03	.2982+03	.4143+03	.5463+03	.3239+03	.6249+03	
14 SMOOTH1(7)	.4349+02	.2669+01	.1341+01	.1664+01	.8741+01	.1218+00	.1183+00	.3847+01	.1912+00	.2118+01	
15 SMOOTH1(8)	.4653+02	.3500+00	.8225+00	.5309+01	.3168+04	.9377+00	.7485+01	.9199+00	.4215+00	.2626+01	
16 SMOOTH1(9)	.2547+01	.3967+00	.2131+00	.3877+01	.7724+05	.8026+02	.4491+02	.1258+00	.9751+01	.1032+00	
17 ELEV PAR(1)	.3806+04	.8313+02	.3423+02	.3094+02	.1506+01	.6121+01	.1107+02	.2957+02	.2062+02	.1973+01	
18 AILR PAR(1)	.6050+03	.4404+02	.1241+01	.1688+02	.3738+01	.1770+01	.3477+01	.9434+00	.3357+01	.2641+01	
19 RUDD PAR(1)	.1451+05	.8956+04	.1058+03	.2159+03	.1297+00	.6042+02	.3942+02	.2100+02	.2524+03	.1866+03	

WILKS LAMBDA (WL)	DF1	DF2	APPROX FOR WL	PROB(F>F)
.0044	.0044	.0044	.0044	.0044
.1743	.1743	.1743	.1743	.1743
.5235	.5235	.5235	.5235	.5235
.3699	.3699	.3699	.3699	.3699
.7797	.7797	.7797	.7797	.7797
.7295	.7295	.7295	.7295	.7295
.6957	.6957	.6957	.6957	.6957
.5748	.5748	.5748	.5748	.5748
.6106	.6106	.6106	.6106	.6106
.7553	.7553	.7553	.7553	.7553
.24.0000	.24.0000	.24.0000	.24.0000	.24.0000
.406.5097	.406.5097	.406.5097	.406.5097	.406.5097
.1.1571	.1.1571	.1.1571	.1.1571	.1.1571
.2282	.2282	.2282	.2282	.2282

SOURCE	DEPENDENT VARIABLE	AE	AF	RC	BD	HE	BF	CD	CE	CF	DE
8 TT SCORE(1)	2	2	4	2	2	2	2	2	2	2	1
8 TT SCORE(1)	.4094+02	.2049+03	.5860+03	.2384+03	.4685+02	.7387+02	.5257+02	.4653+01	.5490+02	.3305+02	.6312+03
9 TD SCORE(1)	.4689+03	.2833+03	.2822+03	.1675+03	.1643+02	.1913+03	.4653+01	.2608+03	.2608+03	.3927+03	.2137+03
10 ALT(2)	.2649+03	.1944+04	.2241+04	.6354+02	.2248+03	.4929+03	.1640+03	.3051+02	.4632+03	.4632+03	.3049+04
11 KIAS(2)	.5615+01	.1766+01	.7910+01	.3672+03	.1977+01	.1948+01	.5476+00	.6450+00	.1294+01	.1294+01	.3031+01
12 C L DEV(2)	.8261+03	.2001+04	.4185+04	.2124+04	.7284+03	.1128+04	.9683+01	.2237+03	.1352+04	.1352+04	.6431+04
13 G P DEV(2)	.5707+03	.1245+03	.2963+03	.3862+03	.3883+03	.2484+03	.1672+03	.5801+03	.5176+03	.5176+03	.3725+03
14 SMOOTH1(7)	.7526+01	.9197+01	.4876+00	.2725+02	.1128+00	.1419+01	.3977+01	.3863+01	.1450+00	.1450+00	.4476+01
15 SMOOTH1(8)	.1780+00	.5073+01	.6642+00	.6006+01	.5872+01	.5883+02	.1131+00	.1410+01	.1603+00	.1603+00	.4611+00
16 SMOOTH1(9)	.4212+01	.3571+02	.1043+00	.8245+02	.7688+01	.1476+01	.2965+01	.1849+00	.6137+02	.6137+02	.1.69+04
17 ELEV PAR(1)	.1089+02	.6854+01	.9662+01	.1396+02	.6572+01	.1712+02	.2529+02	.4156+02	.5293+01	.5293+01	.2964+02
18 AILR PAR(1)	.1374+01	.3728+01	.1882+02	.1438+01	.2998+01	.2018+01	.2297+01	.8158+01	.1570+01	.1570+01	.4894+01
19 RUDD PAR(1)	.1557+03	.7959+02	.2696+03	.1148+03	.4595+02	.4019+02	.1437+03	.3280+03	.1030+03	.1030+03	.1959+03

WILKS LAMBDA (WL)	DF1	DF2	APPROX FOR WL	PROB(F>F)
.6182	.6182	.6182	.6182	.6182
.24.0000	.24.0000	.24.0000	.24.0000	.24.0000
.210.0000	.210.0000	.210.0000	.210.0000	.210.0000
.9235	.9235	.9235	.9235	.9235
.5701	.5701	.5701	.5701	.5701
.8322	.8322	.8322	.8322	.8322
.24.0000	.24.0000	.24.0000	.24.0000	.24.0000
.210.0000	.210.0000	.210.0000	.210.0000	.210.0000
.8416	.8416	.8416	.8416	.8416
.6809	.6809	.6809	.6809	.6809

TABLE ENTRIES ARE UNIVARIATE SUMS OF SQUARES

ANOVA FOR A B C D E F G H

SOURCE	DF	SS	MS	F	P	ERROR
DEPENDENT VARIABLE	1	116				
A	1	9081+04				
B	1	1523+05				
C	1	2656+05				
D	1	1498+03				
E	1	7545+05				
F	1	2303+05				
G	1	4465+01				
H	1	5670+01				
I	1	1624+01				
J	1	6061+03				
K	1	1331+03				
L	1	3613+04				

WILKS LAMBDA (WL)	.6897
DF1	12.0000
DF2	105.0000
FU (APPROX FOR WL)	3.9558
PROB (F>FU)	.0000

Table 4. Ceiling/Visibility Main Effects Across Takeoff, GCA, and Overhead Maneuvers

Source	\bar{x} (clear)	\bar{x} (minimums)	SSBET	SSW/IN	F	p
Takeoff						
Heading Deviation	3.01	3.77	30.9	642	10.3	.002*
Pitch Deviation	1.79	1.87	.350	116	.646	.423
Course Deviation	1.07	1.15	.388	221	.376	.541
Airspeed Deviation	3.68	6.46	.419	3160	28.4	.000*
Elevator Power	2.45	2.65	2.18	113	4.14	.043*
Aileron Power	.720	.847	.873	57.7	3.24	.073
Rudder Power	.430	.411	.018	25.7	.153	.696
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.840	7	208	.000*			
GCA						
Total Score	26.9	22.6	1020	25200	8.66	.004*
Touchdown Score	84.9	82.2	390	30700	2.72	.101
Altitude Deviation	40.4	38.8	146	91800	.340	.561
Airspeed Deviation	2.59	2.59	.003	358	.002	.962
Centerline Deviation	95.0	108	9520	277000	7.36	.008*
Glidepath Deviation	34.7	37.2	358	43000	1.78	.184
Elevator Power	.429	.469	.087	12.2	1.53	.218
Aileron Power	.464	.464	.003	30.4	.000	.988
Rudder Power	.108	.109	.000	5.16	.000	.986
Elevator Power	4.28	4.11	1.51	1380	.234	.629
Aileron Power	1.54	1.81	3.74	404	1.98	.161
Rudder Power	8.22	8.17	.129	18100	.002	.969
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.896	12	203	.029*			
Overhead Pattern						
Pitchout Altitude Deviation	36.3	47.3	6,540	166,000	8.43	.004*
Pitchout Bank Deviation	11.4	9.95	117	6,650	3.75	.054
Elevator Power	1.81	1.97	1.40	364	.823	.365
Aileron Power	.475	.603	.886	41.9	4.52	.035*
Rudder Power	.083	.062	.024	9.78	.524	.469
Downwind Altitude Deviation	35.8	44.6	4,150	119,000	7.43	.007*
Downwind Score	70.4	62.9	3,020	134,000	4.82	.029*
Elevator Power	1.71	2.46	30.2	275	23.47	.000*
Aileron Power	1.07	1.36	4.46	217	4.40	.037*
Rudder Power	.106	.094	.008	7.06	.239	.626
Final Turn Bank Deviation	9.83	11.20	108	5,130	4.49	.035*
Airspeed Deviation	5.07	6.60	126	3,020	8.93	.003*
Elevator Power	1.47	1.79	5.61	272	4.41	.036*
Aileron Power	.745	.870	.852	52.7	3.46	.064
Rudder Power	.515	.328	1.90	117	3.45	.064
Glidepath Deviation	1.09	1.22	927	292	.678	.411
Centerline Deviation	110	154	107,000	13,600,000	1.68	.196
Final Airspeed Deviation	4.23	5.37	70.8	3,340	4.54	.034*
Final Score	12.7	7.87	1,250	77,700	3.45	.064
Elevator Power	2.86	3.18	5.50	555	2.12	.146
Aileron Power	1.77	2.14	7.58	3.49	4.65	.032*
Rudder Power	3.63	4.35	28.4	3,150	1.93	.168
Landing Score	77.1	75.8	87.2	23,700	.786	.376
Wilks Lambda	df ₁	df ₂	p(F>F ₀)			
.754	23	192	.000*			

Note. — All univariate F's evaluated at $F_{1,214}$.