

AD-A045 209

TRANSPORTATION SYSTEMS CENTER CAMBRIDGE MASS
GENERAL AVIATION AVIONICS STATISTICS: 1974. (U)

F/G 9/3

UNCLASSIFIED

1 OF 2
AD
A045 209

AUG 77 J C SCHWENK
TSC-FAA-77-11


FAA-MS-77-2

NL



GENERAL AVIATION
AVIONICS STATISTICS: 1974

ADA 045209

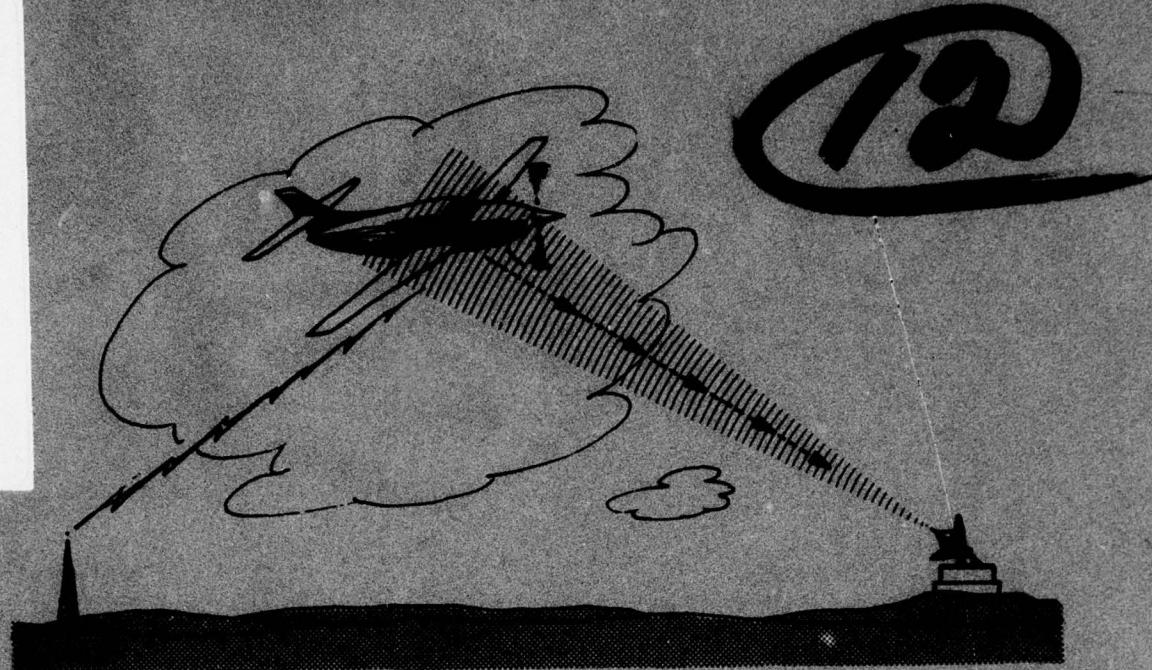

AUGUST 1977
ANNUAL REPORT

DOCUMENT IS AVAILABLE TO THE U.S. PUBLIC
THROUGH THE NATIONAL TECHNICAL
INFORMATION SERVICE, SPRINGFIELD,
VIRGINIA 22161



AD NO. _____
DDC FILE COPY

Prepared by

U.S. Department of Transportation
Transportation Systems Center
Kendall Square
Cambridge MA 02142

Prepared for

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
Office of Management Systems
Washington DC 20590

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the object of this report.

Technical Report Documentation Page

1. Report No. 18 FAA-MS-77-2	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle 6 GENERAL AVIATION AVIONICS STATISTICS: 1974	5. Report Date 11 AUGUST 1977	6. Performing Organization Code 12 TSC-FAA-77-11	
7. Author(s) 10 Judith C. Schwenk (Editor)	8. Performing Organization Report No.	10. Work Unit No. (TRAIL) FA743/TR145	
9. Performing Organization Name and Address U.S. Department of Transportation Transportation Systems Center Kendall Square Cambridge MA 02142	11. Contract or Grant No.	12. Type of Report and Period Covered 9 Annual Report CY 1974	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Office of Management Systems Washington DC 20590	13. Sponsoring Agency Code	14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract The primary objectives of this study were to (1) provide a framework for viewing the general aviation (GA) aircraft fleet, which would relate airborne avionics equipment to the capability for an aircraft to perform in the National Airspace System, and (2) within this framework, to portray the types of aircraft common to the GA fleet in terms of descriptive information on the aircraft.			
<p>To provide the framework, capability groups of avionics equipment were designed and translated into aircraft capability to perform certain functions in the airspace system. Two types of groups evolved: hierarchical groups consist of avionics equipment meeting FAA requirements for flying in different airspace segments, in different directions and for landing at different classes of airports; non-hierarchical groups consist of avionics equipment which give an aircraft additional capability, but which are not required equipment according to FAA regulations.</p> <p>Once the framework was developed, the GA fleet, as represented by the 1974 Aircraft Statistical Master File, was distributed among the capability groups, and its characteristics were studied. In addition, individual capability groups were analyzed to discover subgroups of aircraft with homogeneous characteristics. This report presents the methodologies used in the analyses, statistical tables and other results.</p>			
17. Key Words Avionics, General Aviation	18. Distribution Statement DOCUMENT IS AVAILABLE TO THE U.S. PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22161		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 126	22. Price

Form DOT F 1700.7 (8-72)

Reproduction of completed page authorized

407082 ii

Jmac

preceding page BLANK - NOT FILMED


PREFACE

The avionics data study described in this report was performed under Project Plan Agreements FA-643 and FA-743 sponsored by the Federal Aviation Administration, Office of Management Systems, Information and Statistics Division. It was undertaken as part of a program to assure the quality and usefulness of general aviation data. The study was based on information collected and processed by FAA through its Aeronautical Center in Oklahoma City, Oklahoma.

Several representatives of the Federal Aviation Administration contributed significantly to the study: Nick Soldo and Carolyn Edwards, AMS-230, guided the project as sponsors; Stephen W. Hopkins, AMS-230, produced data tapes for the analysis; George W. MacArthur, AFS-804, answered numerous questions on avionics functions and regulations. All computer programming, data base manipulation and report generation were the responsibility of Ellen Laviana, of Kentron Hawaii, Ltd.

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dis:	CIAI
A	

METRIC CONVERSION FACTORS

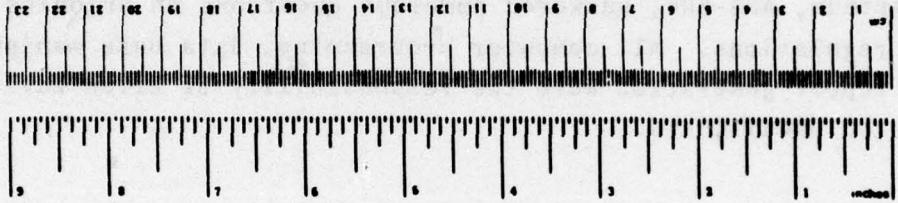

Approximate Conversions from Metric Measures			
Symbol	When You Know	Multiply by	To Find
			<u>LENGTH</u>
mm	millimeters	0.04	inches
cm	centimeters	0.4	inches
m	meters	3.3	feet
km	kilometers	1.1	yards
		0.6	miles
			<u>AREA</u>
	square centimeters	0.16	square inches
	square meters	1.2	square yards
	square kilometers	0.4	square miles
	hectares (10,000 m ²)	2.5	acres
			<u>MASS (weight)</u>
g	grams	0.035	ounces
kg	kilograms	2.2	pounds
t	tonnes (1,000 kg)	1.1	short tons
			<u>VOLUME</u>
ml	milliliters	0.03	fluid ounces
l	liters	2.1	gills
cu m	cubic meters	1.08	quarts
cu m	cubic meters	36	gallons
	cubic meters	1.3	cubic feet
			cubic yards
			<u>TEMPERATURE (degree)</u>
°C	Celsius temperature	9/5 (from side 2)	°Fahrenheit temperature
°F		5/9 (from side 2)	

CONTENTS

<u>Section</u>		<u>Page</u>
1.	INTRODUCTION.....	1
1.1	Definition of General Aviation (GA).....	1
1.2	Background.....	1
1.3	Purpose of Project.....	2
1.4	Source of Data.....	2
2.	DEVELOPMENT AND METHODOLOGY.....	5
2.1	Fleet Size and Coverage of This Report.....	5
2.2	Profile of GA Fleet Avionics.....	5
2.3	Avionics Capability Groups.....	6
2.3.1	Purpose of Groups.....	6
2.3.2	Assumptions.....	8
2.3.3	Methodology.....	8
2.3.4	Definition of Capability Groups.....	9
2.4	Description of Aircraft Characteristics.....	15
2.5	Capability Groups Analysis	17
3.	RESULTS.....	19
	APPENDIXES.....	
	Appendix A. Aircraft Registration Eligibility, Identification, and Activity Report..	83
	Appendix B. Aircraft Statistical Master File Record Layout.....	85
	Appendix C. Airspace Structure.....	93
	Appendix D. Federal Aviation Administration Regions and Regional Offices	99
	Appendix E. Computed Aircraft Types.....	101
	Appendix F. Sampling and Contingency Table Methodology.....	103
	GLOSSARY.....	107
	BIBLIOGRAPHY.....	117

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
A.	Hierarchical Capability Groups.....	14
1.	Hierarchical Capability Group 1.....	68
2.	Hierarchical Capability Group 2.....	69
3.	Hierarchical Capability Group 3.....	70
4.	Hierarchical Capability Group 4.....	71
5.	Hierarchical Capability Group 7.....	72
6.	Hierarchical Capability Group 8.....	73
7.	Non-Hierarchical Capability Groups, Non-Grouped Aircraft.....	74
8.	Non-Hierarchical Capability Group 1	75
9.	Non-Hierarchical Capability Group 3	76
10.	Non-Hierarchical Capability Group 4	77
11.	Non-Hierarchical Capability Group 5	78
12.	Non-Hierarchical Capability Group 6	79
13.	Non-Hierarchical Capability Group 7	80
14.	Non-Hierarchical Capability Group 8	81
15.	Non-Hierarchical Capability Group 9	82

LIST OF TABLES

<u>Table</u>	<u>Page</u>
A. BASIC AVIONICS DATA FOR 1974 GA FLEET.....	7
B. HIERARCHICAL CAPABILITY GROUPS.....	11
C. NON-HIERARCHICAL CAPABILITY GROUPS.....	16
 1. HIERARCHICAL VS. NON-HIERARCHICAL GENERAL AVIATION CAPABILITY GROUPS.....	 26
 CHARACTERISTICS OF HIERARCHICAL CAPABILITY GROUPS	
2. PRIMARY USE.....	30
3. BASE AIRPORT REGION.....	32
4. HOURS FLOWN.....	34
5. AGE OF AIRCRAFT.....	36
6. COMPUTED AIRCRAFT TYPE.....	38
7. AIRCRAFT TYPE.....	40
8. ENGINE TYPE.....	42
9. NUMBER OF ENGINES.....	45
10. NUMBER OF SEATS.....	46
 CHARACTERISTICS OF NON-HIERARCHICAL CAPABILITY GROUPS	
11. PRIMARY USE.....	48
12. BASE AIRPORT REGION.....	50
13. HOURS FLOWN.....	52
14. AGE OF AIRCRAFT.....	54
15. COMPUTED AIRCRAFT TYPE.....	56
16. AIRCRAFT TYPE.....	58
17. ENGINE TYPE.....	60
18. NUMBER OF ENGINES.....	63
19. NUMBER OF SEATS.....	64
20. SUBGROUPS OF HIERARCHICAL CAPABILITY GROUPS.....	66
21. SUBGROUPS OF NON-HIERARCHICAL CAPABILITY GROUPS.....	67

1. INTRODUCTION

1.1 DEFINITION OF GENERAL AVIATION (GA)

The term general aviation (GA) refers to that portion of civil aviation which includes all facets of aviation except air carriers holding a certificate of public convenience and necessity from the Civil Aeronautics Board, and large aircraft commercial operators. GA encompasses such varied services as air taxi, air cargo, industry, agriculture, business, personal, instructional, research, patrol and sport flying. GA aircraft range from four engine turbojets to simple gliders and balloons.

1.2 BACKGROUND

GA aircraft owners compose almost 97 percent of the United States civil air fleet¹ and account for approximately 76 percent of total operations at FAA towered airports.² Despite this dominance of the civil air fleet by GA aircraft, the characteristics and capabilities of the GA fleet are subjects which have not been extensively explored in FAA literature.

The FAA's major source of information on the GA fleet is the Aircraft Registration Eligibility, Identification, and Activity Report, AC Form 8050-73, the current version of which is found in Appendix A. Since 1970, FAA has used Part 1 of the form to register annually all U.S. civil aircraft. Part 2 is for GA aircraft only and contains questions on several aircraft characteristics, including avionics equipment, usage, base airport loca-

¹Census of U.S. Civil Aircraft Calendar Year 1975, U.S. Dept. of Transportation, Federal Aviation Administration, (Washington DC, 1976), p. 4.

²FAA Air Traffic Activity Calendar Year 1975, U.S. Dept. of Transportation, Federal Aviation Administration, (Washington DC, 1976) p. 16.

tion, and hours flown.* Reports currently generated from these forms do not provide sufficient information for FAA to assess the GA fleet in terms of machine sophistication, the ability of aircraft to function in the National Airspace System (NAS), and the typical aircraft comprising the fleet.

1.3 PURPOSE OF PROJECT

Accordingly, the purpose of this project is:

- a. To enhance the information obtained from AC Form 8050-73 by providing a framework for viewing the GA fleet which would relate airborne avionics equipment to the capability for an aircraft to perform in the NAS.
- b. Within this framework, to portray the types of aircraft common to the GA fleet in terms of descriptive information contained in AC Form 8050-73.

This effort will enable the FAA first, to gain insight into the nature of the GA fleet, and second, to measure the impact on the GA fleet of anticipated regulatory changes.

1.4 SOURCE OF DATA

AC Form 8050-73 has been sent out by the FAA in January of every year since 1970 requesting information on the previous year's activities of the aircraft. Part 1 is mandatory for all aircraft, but Part 2 is voluntarily filled out by GA aircraft owners. In the past three years, the response rate for Part 2 has averaged around 73 percent. When the forms are returned to the FAA, they are used, in conjunction with the Aircraft Registration File located at the Aeronautical Center in Oklahoma City, to create the Aircraft Statistical Master (ASM) File on computer tape. Appendix B shows the

* In 1978, the form will be discontinued. Part 1 will be replaced by a triennial aircraft registration and Part 2 will be replaced by an annual GA sample survey.

record layout for the ASM file. The work in this project was based on the 1974 GA fleet as represented by the 1974 ASM File, the most current version available at the project's commencement.

2. DEVELOPMENT AND METHODOLOGY

2.1 FLEET SIZE AND COVERAGE OF THIS REPORT

The 1974 GA aircraft fleet, as represented by the 1974 ASM file, contained 185,350 registered aircraft. Although the response rate to Part 2 of the registration form was only 72.8 percent or 134,935 aircraft, avionics information for previous years was found in the records of 34,095 additional aircraft, so that altogether avionics information was available for 169,030 of the 185,350 GA aircraft.

The tables appearing in this report are all based on the 169,030 GA aircraft for which avionics information was available. Some FAA publications, such as the Census of U.S. Civil Aircraft Calendar Year 1974, are based on the entire fleet size of 185,350. Any disagreements in figures between this report and the Census are due to the elimination from this report of the 16,320 aircraft for which no avionics information was available. Other FAA publications, such as General Aviation: Aircraft, Owner and Utilization Characteristics, are based on those fractions of the GA fleet selected to participate in sample surveys. Results of reports such as these are estimates rather than true population values, introducing another cause for discrepancies in figures between this report and reports based on samples: sampling error. In general, however, results of this report agree with General Aviation results when compared with General Aviation interval estimates.

2.2 PROFILE OF GA FLEET AVIONICS

Table A summarizes the basic avionics data provided by the 1974 ASM file for the analysis of the 1974 GA fleet. It shows the number of aircraft containing each piece of avionics equipment appearing on AC Form 8050-73. Table A has only limited usefulness because it does not enable one to ascertain the number of aircraft containing important groups of equipment, but deals solely with individual pieces of equipment. For example, one cannot determine

the number of aircraft containing all three components of an ILS system, localizer, glide slope, and marker beacon receivers. The capability groups discussed below are designed to make the analysis of groups of avionics possible.

2.3 AVIONICS CAPABILITY GROUPS

2.3.1 Purpose of Groups

Avionics capability groups (CG's) are the means through which significant groups of avionics equipment are associated with aircraft capability to perform in the NAS. The word "capability" takes on a number of meanings in conjunction with the NAS. It can refer to where in the airspace an aircraft can fly, at what airports it can land, under what flying conditions it can fly, or to what extent it can participate in the air route, landing, and communications systems. Avionics equipment is installed in an aircraft because of the capabilities gained from it; consequently, one should be able to identify an aircraft's general potential capabilities from knowledge of its avionics equipment configuration. Often several pieces of equipment are required to obtain a certain capability in the NAS; it thus becomes necessary to study groups of avionics, rather than individual pieces. The CG definitions are designed to provide the link between groups of avionics equipment and capabilities. In addition, the CG's provide a framework within which other aspects of the GA fleet can be examined.

TABLE A. BASIC AVIONICS DATA FOR 1974 GA FLEET

VHF Communications Equipment

VHF Receiver Capability

Tuner	70177
180 channels or less	53835
181 channels or more	85367

VHF Transmitter Capability

20 channels or less	15398
21 thru 180 channels	47407
181 channels or more	80131

ILS Reception Capability

Localizer	86529
Glide Slope	46029
Marker Beacon	71092

Transponder Equipment

64 code	4792
4096 code	66497
Altitude reporting	15633

Navigation Equipment

VOR Receiver

One	58470
More than one	77829

Distance Measuring Equipment (DME) _____ 32345

Automatic Direction Finder (ADF) _____ 73121

Weather Radar _____ 7666

Approved Area Navigation Equipment (RNAV)

Advisory Circular 90-45 _____ 10894

2.3.2 Assumptions

Several assumptions must be made in order to simplify the process of designing the groups and to minimize the number of groups needed. First, it is assumed that an aircraft's avionics equipment defines its capability to perform in the NAS. In actuality, an aircraft's engine size and power, pilot's certification, lack of cabin pressurization, or lack of other types of required equipment may prevent the aircraft from performing at its highest capability level according to its avionics configuration. Second, the capability groups are based on regulations and equipment requirements for the majority of general aviation aircraft. There may be exceptions to the avionics needed for certain capabilities depending on the use of the aircraft, the model of the aircraft, and the pilot's skill at maximizing the capabilities that his avionics equipment gives him. Third, it is assumed that area navigation (RNAV) equipment³ on GA aircraft is comprised of VOR/DME-based course line computers rather than inertial or Doppler systems, since as of January 1, 1975, fewer than 0.5 percent of GA aircraft contained the self-contained type of RNAV equipment⁴. Thus, RNAV equipment is considered to comply with FAA requirements for both VOR equipment and distance measuring equipment (DME).

2.3.3 Methodology

At the onset of the project, it became apparent that two classifications of avionics equipment existed. The first type consisted of avionics equipment meeting FAA requirements for use of the various aspects of the NAS. The second type was avionics equipment which

³See the Glossary for definitions of area navigation equipment and other technical terms.

⁴Avionics Installation Navigation and Communication Report, FAA/AEM.

gave an aircraft additional capability, but which was not required equipment according to FAA regulations. These two types of equipment necessitated the formation of two types of CG's.

To form the first type of CG, three sets of avionics requirements were obtained, one for flight in different segments of the airspace, another for flight in different flying conditions, and the third for landing at different airports. The three sets of requirements were combined into one set of avionics requirements dealing with the above three aspects of the NAS simultaneously. These combined requirements formed the basis for the first type of capability group. They were augmented by miscellaneous requirements for helicopters, air taxis, and gliders.

The formation of the second type of CG was a simpler task. It involved grouping component pieces of avionics equipment which together would form a complete avionics system for enabling an aircraft to make full use of a landing, communications or navigation system in the NAS. However, except for the instrument landing system (ILS), it was found that an aircraft can gain full use of a system in the NAS by installing only one piece of airborne avionics equipment. Consequently, the second type of CG consists mainly of "groups" containing one piece of equipment each.

2.3.4 Definition of Capability Groups

Definitions of the two types of CG's mentioned above, known as hierarchical and non-hierarchical CG's respectively, are given below in terms of the avionics equipment found in AC Form 8050-73. A glossary at the end of the report explains the numerous terms relating to avionics equipment and the NAS found in the definitions below. Appendix C shows the various segments of the airspace and the regulations pertaining to the airspace, airports, and flying conditions.

a. Hierarchical CG's

The FAA has established airborne avionics equipment requirements for aircraft use of the various segments of the NAS. In this regulatory sense, an aircraft's avionics equipment determines its

capabilities to perform in areas of the NAS. FAA regulations deal with three basic capabilities: (1) to fly in different segments of the airspace, (2) to fly in visual flight rules (VFR) and instrument flight rules (IFR) flying conditions, (3) to land at different classifications of airports. In the formation of CG's of avionics equipment which relate to these three capabilities, the groups take on a hierarchical nature, that is, there is an order to the groups. In general, the avionics equipment and the associated capabilities for one capability group are a subset of the avionics equipment and the associated capabilities for the next higher group.

These groups have the additional properties that they are mutually exclusive and exhaustive. When assigning individual aircraft to CG's, mutual exclusiveness means that an aircraft can be assigned to one and only one group. Exhaustiveness means that every aircraft will fall into a group.

Table B describes the hierarchical CG's in terms of avionics equipment and capabilities. The capabilities described represent the highest level at which an aircraft has avionics potential to participate in the NAS. Generally, an aircraft can also participate at all lower levels. Each group of equipment below is described in terms of (1) airspace capability, (2) flying condition capability, (3) airport capability. Exceptions to airport and airspace capabilities are noted for helicopter and glider operations, respectively.

Figure A is a schematic diagram of the hierarchical capability groups, which summarizes the relationship of three types of aircraft capabilities to their required avionics equipment, namely flying conditions, airspace, and airport capabilities. To determine the capabilities associated with a particular avionics box, one must position the box relative to the lines of the capability of interest. The capabilities increase from top to bottom. Generally, they are maximums, i.e., if an aircraft has reached a certain level with regard to one type of capability, it can also perform at lower levels with regard to the type of capability.

TABLE B. HIERARCHICAL CAPABILITY GROUPS

<u>AVIONICS</u>	<u>CAPABILITIES</u>
Group 1 No regulatory avionics	<ul style="list-style-type: none"> (1) Up to and including 12,500 feet mean sea level (MSL) Gliders...Up to and including 18,000 feet MSL ADF...Colored airways below 12,500 feet MSL VOR or RNAV...VOR airways below 12,500 feet MSL RNAV...Low altitude RNAV airways below 12,500 feet MSL (2) VFR flight, day and night (3) Uncontrolled airports
Group 2 Two-way communications	<ul style="list-style-type: none"> (1) Up to and including 12,500 feet MSL Gliders...Up to and including 18,000 feet MSL (2) VFR flight, day and night (3) Non-TCA controlled airports Group III TCA's Helicopters with 4096 code transponders...Group II TCA's All helicopters...Group I and II TCA's below 1000 feet above ground level (AGL)
Group 3 Two-way communications VOR or Automatic Direction Finder (ADF) or RNAV	<ul style="list-style-type: none"> (1) Up to and including 12,500 feet MSL Gliders...Up to and including 18,000 feet MSL ADF...Colored airways below 12,500 feet MSL VOR or RNAV...VOR airways below 12,500 feet MSL RNAV...Low altitude RNAV airways below 12,500 feet MSL (2) IFR flight

TABLE B. CONTINUED

AVIONICS

CAPABILITIES

Group 4

Two-way communications
4096 code transponder
VOR or RNAV

- (3) Non-TCA controlled airways
Group III TCA's
Helicopters with 4096 code
transponders...Group II
TCA's
All helicopters...Group I and
II TCA's below 1000 feet AGL

Group 5

4096 code transponder
Altitude encoding equipment

- (1) Up to and including 12,500
feet MSL
Gliders...Up to and including
18,000 feet MSL
VOR airways below 12,500 feet
MSL
RNAV...Low altitude RNAV air-
ways below 12,500 feet MSL
- (2) IFR flight
- (3) Non-TCA controlled airports
Group II TCA's
Helicopters...Group I TCA's
below 1000 feet AGL

Group 6

Two-way communications
4096 code transponder
Altitude encoding equipment

- (1) Non-positive controlled air-
space
- (2) VFR flight, day and night
- (3) Uncontrolled airports
Group III TCA's

Group 7

Two-way communications
4096 code transponder
Altitude encoding equipment
VOR

- (1) Non-positive controlled air-
space
- (2) VFR flight, day and night
- (3) Non-TCA controlled airports
Group III TCA's
Helicopters...Group I TCA's

- (1) Non-positive controlled air-
space VOR airways
- (2) IFR flight

TABLE B. CONTINUED

<u>AVIONICS</u>	<u>CAPABILITIES</u>
	(3) Group I TCA's
<u>Group 8</u> Two-way communications 4096 code transponder Altitude encoding equipment VOR } or RNAV DME }	(1) Positive controlled airspace Jet routes RNAV...RNAV routes
	(2) IFR flight
	(3) Group I TCA's

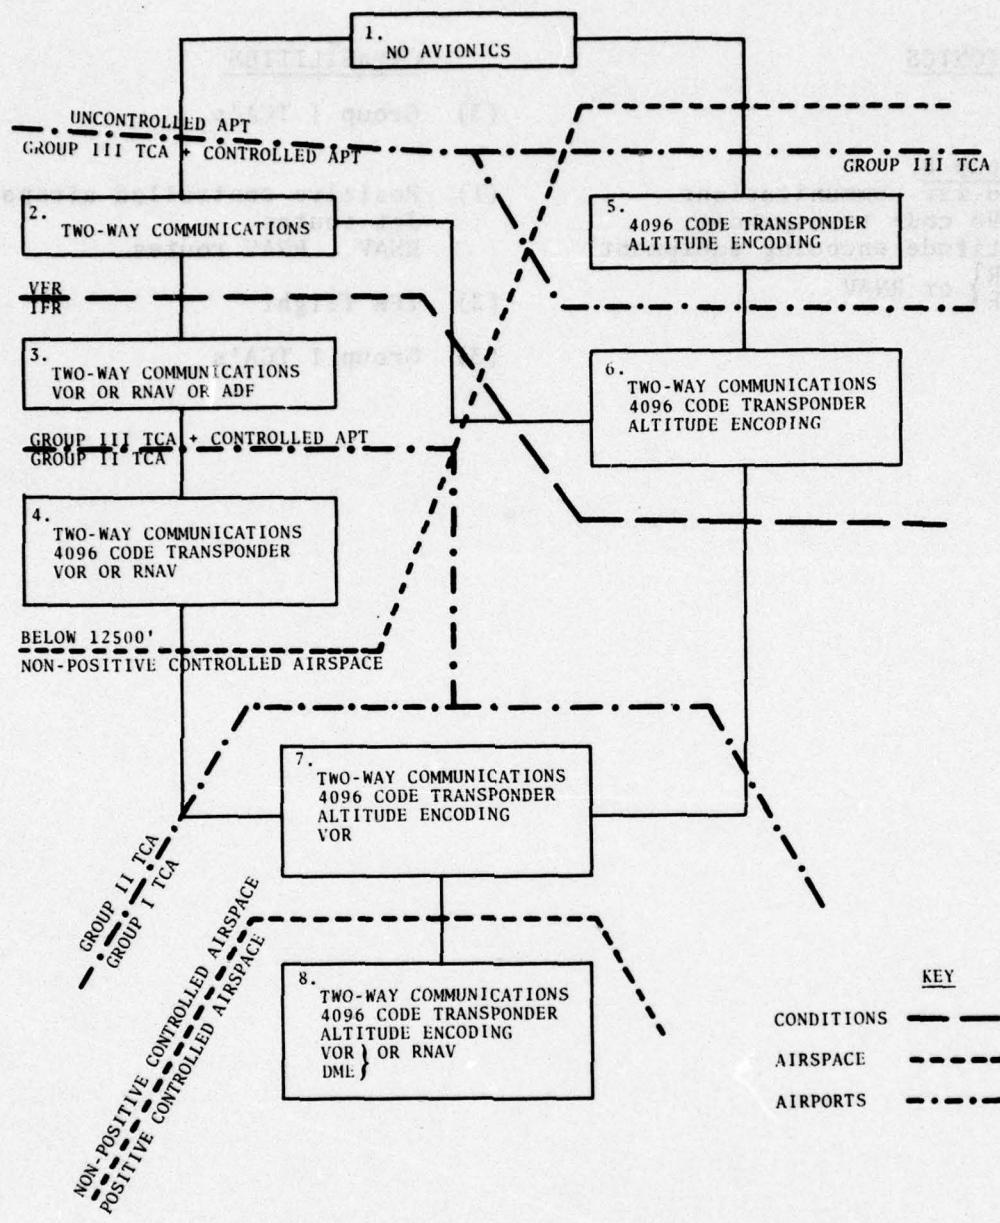


FIGURE A. HIERARCHICAL CAPABILITY GROUPS

b. Non-Hierarchical CG's

Many kinds of avionics equipment exist which give an aircraft additional capabilities to the three types discussed in the previous section. Whereas the latter capabilities are derived from regulatory considerations, those to be discussed in this section are based on engineering and safety considerations. The avionics CG's of this section have none of the properties of the previous groups. That is, they are not hierarchical in nature, nor are they mutually exclusive and exhaustive. The CG's are described below in Table C in terms of the avionics equipment and associated capabilities.

2.4 DESCRIPTION OF AIRCRAFT CHARACTERISTICS

Nine aircraft characteristics were available on the 1974 ASM Files for analysis in the framework of the newly developed CG's. They are listed below with appropriate comment.

- a. Primary use of aircraft during 1974.
- b. Base airport region: See Appendix D for an FAA regional map.
- c. Hours flown during 1974: This variable was discretized into 50-hour intervals for easier reporting.
- d. Age of aircraft in 1974: This variable was discretized into 5-year intervals for easier reporting.
- e. Computed aircraft type: The thirteen computed aircraft types combine the four aircraft characteristics of engine type, number of engines, aircraft type (simple), and number of seats into meaningful combinations for the GA fleet. See Appendix E for type definitions.
- f. Aircraft type (simple).
- g. Engine type.
- h. Number of engines.
- i. Number of seats.

TABLE C. NON-HIERARCHICAL CAPABILITY GROUPS

<u>AVIONICS</u>	<u>CAPABILITIES</u>
<u>Group 1</u>	
Localizer	Partial use of ILS at airports.
<u>Group 2</u>	
Localizer	Partial use of ILS at airports.
Marker Beacon	
<u>Group 3</u>	
Localizer	Full use of ILS at airports.
Marker Beacon	
Glide Slope	
<u>Group 4</u>	
RNAV	Area navigation capability.
<u>Group 5</u>	
Weather Radar	Detection of storms in aircraft's route.

2.5 CAPABILITY GROUPS ANALYSIS

The identification of subgroups of aircraft with homogeneous characteristics within each CG required the use of contingency table and sampling techniques. The methodology used in the identification process is described in Appendix F.

3. RESULTS

DISCUSSION OF RESULTS

Based on the 169,030 aircraft for which avionics data were available, the following results were obtained:

Table 1: Hierarchical versus Non-Hierarchical Capability Groups

This table shows the distribution of GA aircraft into hierarchical and non-hierarchical CG's, beginning with the least sophisticated groups in the upper left-hand corner of the table. Excluding the non-hierarchical CG category, a general diagonal trend can be seen from upper left to lower right corners in the distribution of aircraft. This means that as aircraft increase their capabilities in the hierarchical CG's, they also tend to increase their non-hierarchical equipment capabilities. For example, aircraft with no regulatory avionics (hierarchical CG 1) would not generally possess complex weather radar or area navigation equipment. On the other hand, aircraft in hierarchical CG 8 would not likely be without sophisticated weather, landing and navigation equipment.

Some additional observations on the distribution of GA aircraft are below:

- a. Almost 93 percent of GA aircraft cannot fly in positive controlled airspace (above 18,000 MSL).
- b. Hierarchical CG's 5 and 6 together contain only 0.13 percent of the GA fleet. Examination of the avionics equipment associated with these groups reveals that both include transponder equipment, but neither include navigation equipment. One includes two-way communications. This suggests a reason for the small number of aircraft in these groups and the comparatively large number in the remaining groups to be that the common path of acquisition of avionics proceeds from communications to transponder to navigation equipment.
- c. Only 0.49 percent of the GA fleet falls into non-hierarchical CG 2, Localizer and Glide Slope. This would suggest that

the normal pattern in acquiring ILS equipment is begin with a localizer, then add marker beacon equipment, and finally add a glide slope receiver.

- d. 79,276 or 47 percent of the GA fleet possess none of the avionics appearing in the non-hierarchical CG's. Of these aircraft, 73,160 fall into heirarchical CG's 1, 2, and 3, and comprise 72 percent of these 3 hierarchical CG's.

Tables 2 through 10: Characteristics of Hierarchical Capability Groups

These tables show the distributions of the nine available aircraft characteristics across the eight hierarchical CG's. Several generalizations about hierarchical CG's and the nature of the GA fleet were revealed in these tables and are listed below.

- a. As hierarchical CG's increase in order of sophistication, the predominant uses also grow in sophistication from personal, to personal and business to executive, business and personal.
- b. There are some differences among the distributions of hierarchical CG's across base airport region, primarily due to CG's 5 and 6 which are notably smaller than the other CG's. Other variations are evident from the table.
- c. Those aircraft containing more avionics equipment and capabilities are flown more hours than those aircraft with smaller investments in avionics equipment.
- d. New aircraft (0-10 years) comprise a substantially larger percentage of the higher order CG's than the lower order groups. Old aircraft (over 25 years) comprise a substantially larger proportion of lower order groups than higher order groups.
- e. The computed type of aircraft becomes more sophisticated as one moves from low order to high order CG's. Not only does this apply for computed aircraft type, but also for the four characteristics individually which are combined to form the computed aircraft type (simple aircraft type, engine type, number of engines, number of seats).

Tables 11 through 19: Characteristics of Non-Hierarchical Capability Groups

These tables show the distributions of the nine available aircraft characteristics across ten non-hierarchical CG combinations. Generalizations on the nature of non-hierarchical CG's and of the GA fleet as a whole were obtained from these tables and are listed below.

- a. As non-hierarchical groups increase in sophistication, the predominant uses change from personal and business, to personal, business and executive, to business and executive.
- b. Aircraft falling into the non-grouped category are older than those aircraft falling into the other non-hierarchical CG's. Within the latter groups, there is a gradual decrease in aircraft age moving from less to more sophisticated groups.
- c. The distribution of the non-hierarchical CG's over the base airport regions are more uniform than the distributions for the other eight characteristics. Yet, differences are apparent. The greatest departures from the average occur in CG's 6, 8, and 9. These three CG's all contain weather radar as one of their avionics requirements; in fact, groups 8 and 9 are subsets of group 6. It would seem therefore, that the weather radar is the determinant of the distribution. The weather radar is found in unusually high concentrations in the southern, southwestern, and eastern regions, while it is more scarce than normal in the Rocky Mountain and western regions. Weather patterns of these regions provide the probable explanation for this phenomenon. Storms in Eastern United States cover wide areas with clouds, making the location of the storms' electrical centers difficult. In the West, the storms are more concentrated, and easier to track visually. Thus weather radars are more prevalent in the East.
- d. Those aircraft containing more avionics equipment and capabilities are flown more hours than those aircraft with small investments in avionics equipment.

- e. The computed aircraft type becomes more sophisticated as one moves from lower order to higher order CG's. Not only does this apply for computed aircraft type, but also for the four characteristics individually which are combined to form the computed aircraft type (simple aircraft type, engine type, number of engines, and number of seats).

Tables 20 and 21, Figures 1 through 15: Subgroups of Hierarchical & Non-Hierarchical Capability Groups

These figures and tables show the results of the search for subgroups of aircraft with homogeneous characteristics within each CG. A general discussion of the results follows.

The nature of the aircraft within individual capability groups was more diverse than expected. Only 50 percent on the average of the GA aircraft within any one CG could be classified into subgroups, even when on exception of the number of descriptive factors reduced to two or when the minimum subgroup size was dropped to as low as 3 percent. Approximately six subgroups of aircraft with two to four homogeneous characteristics were identified for each CG. Aircraft which did not fall into large subgroups were grouped into an "other" category.

Nonetheless, the study of the joint characteristics of the GA fleet revealed information about the nature of the CG's which was in agreement with the information revealed by the study of individual characteristics in Tables 2 through 19. A summary of the analyses is shown in Tables 20 and 21. It can be seen that the lower order hierarchical and non-hierarchical CG's contained subgroups of simple aircraft such as older fixed-wing single engine piston aircraft with 1-3 seats which were not flown and older personal use aircraft flown less than 100 hours. As the CG's became more sophisticated, so did the types and uses of aircraft. Simultaneously, the amount of flying time increased, and age decreased. Examination of the highest order CG's revealed subgroups of complex aircraft such as new turboprop aircraft and

new two engine aircraft used for executive purposes flown more than 400 hours during the year. In Tables 20 and 21, the capability groups and the subgroups are arranged in order of sophistication beginning in the upper left hand corner of the report. The diagonal trends reveal the strong positive relationship between avionics sophistication and characteristics sophistication. More detailed results of the individual CG analyses are shown in Figures 1 through 15.

TABLE 1

The key following the table shows the interpretation of the symbols and numbers heading the rows and columns of the table. The comments below will facilitate the interpretation of the table:

- a. Aircraft assigned to hierarchical CG 1 (No regulatory avionics) contain either no avionics equipment whatsoever or a combination of equipment which does not match or exceed the specified requirements for any other CG.
- b. Hierarchical CG 2, (Two-way communications), indicates an aircraft has some combination of VHF receiver and transmitter capabilities, and not necessarily a two-way radio unit.
- c. Since non-hierarchical groups are not all mutually exclusive (that is, they overlap), the columns do not add to the counts at the bottom of the table. The first four groups, L through LMG, are mutually exclusive, and the last three groups, IR, IW and All, are mutually exclusive. However, there is some overlap between the first six groups and the last three groups, and between the first four and the next two groups.
- d. Non-grouped aircraft, NG, are those aircraft possessing none of the avionics covered by the other nine non-hierarchical CG's.

TABLE 1. HIERARCHICAL VS. NON-HIERARCHICAL GENERAL AVIATION CAPABILITY GROUPS

	HCG	1	2	3	4	5	6	7	8	ALL
NON-H.										
L	192	127	13390	4316	1	2	180	34	18750	
L.C	11	4	372	370	0	0	21	19	824	
L.H	100	44	7331	13836	9	1	790	499	22610	
LNC	232	45	4461	26106	64	15	1609	11733	44345	
RiAV	301	0	3766	3433	32	0	0	3362	10894	
W.G	21	2	364	2045	13	2	30	5164	7666	
I,R	15	0	349	1828	8	0	0	1365	3565	
S,H	11	0	242	1663	6	2	26	3396	5346	
ALL	1	0	57	345	11	0	0	1771	2165	
N.G	25813	3703	40639	5577	72	38	370	59	79276	
CNT	26432	6930	68695	51150	157	56	2978	12442	169030	

TABLE 1. CONTINUED

KEYHierarchical Capability Groups

- | | |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| 1. No regulatory avionics | 6. Two-way communications
4096 code transponder
Altitude encoding equipment |
| 2. Two-way communications | 7. Two-way communications
4096 code transponder
Altitude encoding equipment
VOR |
| 3. Two-way communications
VOR or ADF or RNAV | 8. Two-way communications
4096 code transponder
Altitude encoding equipment
VOR } or RNAV
DME } |
| 4. Two-way communications
4096 code transponder
VOR or RNAV | |
| 5. 4096 code transponder
Altitude encoding equipment | |

Non-hierarchical Capability Groups

L: Localizer

M: Marker beacon

G: Glide slope

R, RNAV: Area navigation system

W, WRAD: Weather radar

I, LMG: Complete ILS system

ALL : I, R and W

NG: Non-grouped aircraft

TABLES 2 THROUGH 19

These reports show three numbers in each cell. The first is the number of aircraft falling into the particular capability group-category combination represented by the cell. The second number is the percent of the row or category that the number of aircraft represents. The third number is the percent of the column or capability group that the number of aircraft represents.

The key appearing at the bottom of each table gives the avionics associated with the CG's. Hierarchical group reports are additive across the columns as these groups are mutually exclusive. The numbers in the right-hand columns of the non-hierarchical group reports are the marginal distributions of the GA fleet across the categories, but are not row totals since non-hierarchical CG's are not mutually exclusive.

TABLE 2. PRIMARY USE

	1	2	3	4	5	6	7	8	SUM
EXECUTIVE	54	77	395	1765	15	2	95	2835	6236
ROW %	0.87	1.23	6.33	26.30	0.28	0.03	1.52	61.47	
COLUMN %	0.20	1.11	0.58	3.45	9.55	3.57	5.19	50.81	5.69
BUSINESS	709	323	7029	12200	30	10	787	3561	24839
ROW %	3.22	1.30	25.10	49.52	0.12	0.04	3.17	14.34	
COLUMN %	5.00	4.66	10.23	24.05	19.11	17.86	26.43	26.62	14.70
PERSONAL	7514	2169	27490	16944	29	5	976	1519	56666
ROW %	13.26	3.66	46.51	29.90	0.05	0.01	1.72	2.66	
COLUMN %	26.21	31.59	40.02	33.13	18.47	6.93	32.77	12.21	33.52
AERIAL APPLICATION	2654	371	370	164	4	0	7	26	3596
ROW %	75.60	10.32	10.29	4.56	0.11	0.0	0.19	0.72	
COLUMN %	0.97	5.35	0.54	0.32	2.55	0.0	0.24	0.21	2.13
INSTRUCTION	426	231	5260	2774	1	3	124	134	6953
ROW %	4.76	2.58	58.75	30.98	0.01	0.03	1.39	1.50	
COLUMN %	1.60	3.33	7.66	5.42	0.64	5.36	4.16	1.08	5.30
ARMED TAXI	51	244	947	1972	9	4	187	1068	4047
ROW %	1.15	5.60	20.40	44.34	0.20	0.09	4.21	24.02	
COLUMN %	0.19	3.59	1.32	3.06	5.73	7.14	6.20	0.58	2.63

TABLE 2. CONTINUED

GROUP	1	2	3	4	5	6	7	8
INDUSTRIAL/SPECIAL	101	559	641	531	1	4	56	100
ROW %	1.63	20.02	35.75	29.62	0.06	0.22	3.12	5.58
COLUMN %	0.38	5.18	0.93	1.04	0.64	7.14	1.04	0.69
AIRCRAFT RENTAL BUS.	216	120	207A	2515	3	1	161	195
ROW %	4.45	2.26	39.14	47.37	0.06	0.02	3.63	3.67
COLUMN %	0.89	1.73	3.03	4.92	1.91	1.79	5.41	1.57
OPTIMA	473	28H	866	621	0	7	47	229
ROW %	16.69	11.38	34.22	24.54	0.0	0.29	1.86	9.05
COLUMN %	1.78	4.16	1.26	1.21	0.0	12.50	1.55	1.94
INPUTED/NOT REPORTED	14374	2723	25649	11564	65	20	538	1777
ROW %	26.21	4.94	45.27	21.17	0.12	0.04	0.92	3.25
COLUMN %	53.7A	50.20	51.43	27.61	41.40	35.71	18.07	14.28
TOTALS	26632	6930	68685	51150	157	56	2978	12492
ROW %	15.76	4.10	40.63	30.26	0.09	0.03	1.76	7.36

KEY

GROUP

GROUP

- 1. No regulatory avionics
- 2. Two-way communications
- 3. Two-way communications
VOR or ADF or RNAV
- 4. Two-way communications
4096 code transponder
VOR or RNAV
- 5. 4096 code transponder
Altitude encoding equipment
- 6. Two-way communications
4096 code transponder
Altitude encoding equipment
- 7. Two-way communications
4096 code transponder
Altitude encoding equipment
VOR
- 8. Two-way communications
4096 code transponder
Altitude encoding equipment
VOR } or RNAV
DME }

TABLE 3. BASE AIRPORT REGION

	1	2	3	4	5	6	7	8	SUM
ROW	1	2	3	4	5	6	7	8	9
NEW ENGLAND	1097	266	2463	1796	3	2	183	468	6208
ROW	3	16.87	3.96	39.67	28.93	0.05	0.03	2.95	7.54
COLUMN	2	5.93	3.55	3.59	3.71	1.91	3.57	6.15	3.76
EASTERN	3195	673	7889	7596	21	7	555	2017	21623
ROW	3	16.04	3.08	36.15	33.09	0.10	0.03	2.54	9.56
COLUMN	2	12.00	9.71	11.49	14.46	13.38	12.50	16.64	16.77
SOUTHERN	3502	849	9319	8224	34	5	411	2231	24623
ROW	3	16.22	3.45	37.05	33.09	0.14	0.01	1.67	9.26
COLUMN	2	13.15	12.25	13.57	16.08	21.66	5.36	13.80	18.33
GREAT LAKES	5278	1093	13613	9732	22	7	464	2484	32603
ROW	3	16.16	3.08	41.75	39.05	0.07	0.02	1.62	7.42
COLUMN	2	19.82	10.47	10.82	19.03	10.01	12.50	15.58	19.36
CENTRAL	2218	775	9066	3761	19	5	191	606	11919
ROW	3	16.61	2.51	42.32	28.20	0.14	0.04	1.50	6.76
COLUMN	2	6.33	3.97	7.34	6.37	12.19	6.93	6.91	7.05
SNICKY MOUNTAINS	1537	197	3937	2319	11	1	97	399	6685
ROW	3	17.79	6.66	49.38	26.78	0.13	0.01	1.12	6.38
COLUMN	2	5.77	5.50	5.71	5.53	7.01	1.79	3.26	3.10

TABLE 3. CONTINUED

GROUP	8							
	1	2	3	4	5	6	7	8
MINNESOTA	1667	590	4376	2569	3	5	127	466
MINN.	17.42	6.09	45.00	25.91	0.03	0.05	1.31	4.14
COLUMBIA	6.33	0.51	6.34	4.91	1.91	0.93	4.26	3.26
COLUMBIA	3456	1494	10777	8775	11	13	566	1481
SOUTHEAST	13.44	5.64	40.87	32.66	0.04	0.05	2.11	5.59
SOUTHEAST	12.44	21.56	15.69	17.02	7.01	23.21	10.80	11.00
SOUTHEAST	4121	865	8366	6662	27	9	362	1965
SOUTHEAST	16.40	3.85	37.36	29.84	0.12	0.04	1.62	8.77
SOUTHEAST	15.47	12.65	12.16	13.06	17.20	16.07	12.16	15.79
PACIFIC	29	38	212	89	0	1	4	6
PACIFIC	7.05	10.03	55.94	23.48	0.0	0.26	1.06	1.58
PACIFIC	0.11	0.55	0.31	0.17	0.6	1.79	0.13	0.05
ALASKAN	506	506	2569	273	6	3	21	59
ALASKAN	13.77	12.01	64.70	6.69	0.15	0.08	0.53	0.98
ALASKAN	2.05	7.33	5.74	0.53	3.62	5.36	0.71	0.31
WEIGHT	16	4	136	63	0	0	3	23
WEIGHT	6.46	1.62	55.47	25.51	0.0	0.0	1.21	6.31
WEIGHT	0.06	0.06	0.20	0.12	0.0	0.0	0.10	0.18
WEIGHT	26032	6930	6665	51150	157	56	2978	12462
WEIGHT	15.76	4.10	40.63	30.26	0.09	0.05	1.76	7.36

KEY

280

- GROUP**

 1. No regulatory avionics
 2. Two-way communications
 3. Two-way communications VOR or ADF or RNAV

CONTINUATION

- | <u>GROUP</u> | <u>GROUP</u> |
|--------------|----------------------------------------------------------------------------------------------------------|
| 4. | Two-way communications
4096 code transponder
VOR or RNAV |
| 5. | 4096 code transponder
Altitude encoding equipment |
| 6. | Two-way communications
4096 code transponder
Altitude encoding equipment |
| 7. | Two-way communications
4096 code transponder
Altitude encoding equipment
VOR |
| 8. | Two-way communications
4096 code transponder
Altitude encoding equipment
VOR } or RNAV
DME } |

TABLE 4. HOURS FLOWN

		1	2	3	4	5	6	7	8	9U"
1 - 49	ROW %	5455	1360	12021	3637	17	11	209	463	23183
COLUMN %		25.57	5.87	51.65	15.69	0.07	0.05	0.90	2.09	
		20.52	19.62	17.10	7.11	10.83	19.64	7.12	5.72	13.72
50 - 99	ROW %	2590	924	12078	7844	16	3	420	867	24342
COLUMN %		10.64	3.80	49.62	30.58	0.07	0.01	1.73	3.56	
		9.73	13.33	17.58	14.55	10.19	5.36	14.10	6.97	14.40
100 - 149	ROW %	1177	502	6939	7896	9	1	469	1306	18319
COLUMN %		6.43	2.74	37.99	43.10	0.05	0.01	2.56	7.13	
		4.42	7.24	10.13	15.44	5.73	1.79	15.75	10.50	10.84
150 - 199	ROW %	587	226	3166	4985	6	1	308	1162	10441
COLUMN %		5.62	2.16	30.32	47.74	0.06	0.01	2.95	11.13	
		2.20	5.26	4.61	9.75	3.82	1.79	10.34	9.34	6.18
200 - 249	ROW %	542	197	2357	4096	5	2	269	1259	6747
COLUMN %		6.20	2.25	26.95	46.33	0.06	0.02	3.30	14.39	
		2.04	2.84	3.43	8.01	3.18	3.57	9.70	10.12	5.17
250 - 299	ROW %	363	118	1282	2343	7	3	142	871	5089
COLUMN %		7.13	2.32	24.41	46.04	0.14	0.06	2.79	17.12	
		1.36	1.70	1.61	4.56	4.46	5.36	4.77	7.00	3.01

TABLE 4. CONTINUED

GROUP

- | | | | |
|-------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 1. No regulatory avionics | 4. Two-way communications
4096 code transponder
VOR or RNAV | 6. Two-way communications
4096 code transponder
Altitude encoding equipment | 8. Two-way communications
4096 code transponder
Altitude encoding equipment |
| 2. Two-way communications | | | VOR } or RNAV |
| 3. Two-way communications
VOR or ADF or RNAV | 5. 4096 code transponder
Altitude encoding equipment | 7. Two-way communications
4096 code transponder
Altitude encoding equipment | VOR } |

TABLE 5. AGE OF AIRCRAFT

	1	2	3	4	5	6	7	R	SUM
0 - 4 YEARS	3144	1297	8120	11549	44	27	613	3449	28743
ROW %	11.13	4.59	28.75	40.89	0.16	0.10	2.17	12.21	
COLUMN %	11.81	18.72	11.82	22.58	28.03	4.82	20.58	27.72	16.71
5 - 10 YEARS	2723	1317	16792	17887	31	9	1055	4877	46691
ROW %	5.83	2.42	40.25	58.31	0.07	0.02	2.26	10.45	
COLUMN %	10.22	19.90	27.36	54.97	19.75	16.07	35.43	39.20	27.62
11 - 15 YEARS	1679	732	10792	9660	8	2	525	1671	25769
ROW %	6.70	2.92	43.05	58.53	0.05	0.01	2.09	6.67	
COLUMN %	6.30	10.56	15.71	18.89	5.10	3.57	17.63	13.43	14.83
16 - 20 YEARS	1180	558	10782	5873	11	5	386	692	19487
ROW %	6.06	2.86	55.33	30.14	0.06	0.03	1.98	3.55	
COLUMN %	4.43	8.05	15.70	11.48	7.01	6.33	12.96	5.56	11.53
21 - 25 YEARS	865	357	5219	1628	7	4	141	173	8594
ROW %	10.07	4.15	60.73	21.27	0.06	0.05	1.69	2.01	
COLUMN %	3.25	5.15	7.60	3.57	4.46	7.14	4.73	1.39	5.08
26 - 30 YEARS	895	1253	11246	1391	31	6	88	131	23329
ROW %	38.19	6.54	48.21	5.98	0.13	0.03	0.38	0.56	
COLUMN %	53.45	22.01	16.54	2.72	19.75	10.71	2.96	1.05	13.80

TABLE 5. CONTINUED

GROUP	1	2	3	4	5	6	7	8
11 - 35 YEARS	5935	432	1005	554	4	0	18	136
ROW ⁴	66.48	7.34	17.08	6.02	0.07	0.0	0.31	2.31
COLUMN ²	14.78	6.23	1.46	0.69	2.55	0.0	0.60	1.09
OVER 35 YEARS	1340	134	248	63	1	0	3	12
ROW ⁴	74.40	7.44	15.77	5.50	0.06	0.0	0.17	0.67
COLUMN ²	5.03	1.93	0.36	0.12	0.64	0.0	0.10	0.10
NOT REPIATED	2857	578	2479	2545	20	3	149	1501
ROW ⁴	28.77	5.82	24.96	25.62	0.20	0.03	1.50	9432
COLUMN ²	10.73	3.34	3.61	4.08	12.74	5.36	5.00	10.46
TOTALS	20632	6930	68665	51150	157	56	2978	12442
ROW ⁴	15.76	4.10	40.61	30.26	0.09	0.03	1.76	164030

KEY

- | GROUP | KEY | GROUP | KEY |
|-------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----|
| 1. No regulatory avionics | 4. Two-way communications
4096 code transponder
VOR or RNAV | 7. Two-way communications
4096 code transponder
Altitude encoding equipment
VOR | |
| 2. Two-way communications | | | |
| 3. Two-way communications
VOR or ADF or RNAV | 5. 4096 code transponder
Altitude encoding equipment | 8. Two-way communications
4096 code transponder
Altitude encoding equipment
VOR } or RNAV
DME } | |
| | 6. Two-way communications
4096 code transponder
Altitude encoding equipment | | |

TABLE 6. COMPUTED AIRCRAFT TYPE

		1	2	3	4	5	6	7	8	9
TYPE										
TYPE 1	ROW	21144	32259	30170	4068	49	11	221	83	59005
	COLUMN	2	35.43	50.52	51.13	6.89	0.08	0.02	0.37	0.14
			79.39	47.03	43.93	7.05	31.21	19.64	7.42	0.67
										34.97
TYPE 2	ROW	2198	900	152270	35847	51	13	2767	3192	79748
	COLUMN	2	2.76	1.13	44.25	44.96	0.06	0.02	2.64	4.00
			8.25	12.99	51.35	70.10	32.88	23.21	76.12	25.64
										47.18
TYPE 3	ROW	197	53	1548	7726	26	5	308	4235	13039
	COLUMN	2	1.41	0.38	9.96	55.03	0.19	0.04	2.21	30.39
			0.74	0.74	2.02	15.10	16.56	8.93	10.34	34.05
										8.25
TYPE 4	ROW	198	35	807	2463	7	2	102	1965	5579
	COLUMN	2	3.55	0.63	14.06	44.15	0.13	0.04	1.43	35.22
			0.74	0.51	1.17	4.02	4.46	3.57	3.43	15.79
										3.30
TYPE 5	ROW	22	4	103	45	9	1	7	48	280
	COLUMN	2	7.86	1.43	56.79	33.93	0.0	0.36	2.50	17.16
			0.08	0.06	0.15	0.19	0.0	1.79	0.24	0.59
										0.17
TYPE 6	ROW	22	3	12	244	3	1	1	1104	1583
	COLUMN	2	1.30	0.0	2.87	17.64	0.22	0.07	0.07	70.82
			0.07	0.0	0.02	0.68	1.01	1.79	0.03	0.87
										0.82

TABLE 6. CONTINUED

GROUP	1	2	3	4	5	6	7	8
TRIP 7	5	0	25	124	2	0	14	-195
V.H.	3.40	0.0	4.13	4.50	0.05	2.65	0.21	529
C.N. 1	0.02	0.0	0.04	0.25	0.05	0.07	0.11	
C.N. 2	0.02	0.0	0.04	0.25	0.05	0.07	0.11	0.31
TRIP 8	10	12	11	76	0	0	3	38
V.H.	20.94	5.14	10.16	36.70	0.0	0.0	1.37	17.35
C.N. 1	0.22	0.17	0.03	0.25	0.0	0.0	0.10	0.31
C.N. 2	0.22	0.17	0.03	0.25	0.0	0.0	0.10	0.31
TRIP 9	4	1	4	68	4	1	0	1232
V.H.	0.36	0.23	0.10	5.17	0.10	0.08	0.0	1316
C.N. 1	0.02	0.04	0.01	0.13	2.55	1.79	0.0	
C.N. 2	0.02	0.04	0.01	0.13	2.55	1.79	0.0	0.76
TRIP 10	1	0	1	6	0	0	0	181
V.H.	0.02	0.03	0.00	5.73	0.0	0.0	0.0	
C.N. 1	0.06	0.06	0.01	0.01	0.0	0.0	0.0	
C.N. 2	0.06	0.06	0.01	0.01	0.0	0.0	0.0	
TRIP 11	1328	1340	530	47	6	11	13	6
V.H.	4.27	4.35	1.48	1.52	0.26	0.30	0.19	
C.N. 1	4.04	4.04	0.40	0.09	5.10	10.48	0.34	1.10
C.N. 2	4.04	4.04	0.40	0.09	5.10	10.48	0.34	1.10
TRIP 12	41	224	464	565	1	4	42	31
V.H.	3.18	10.23	41.68	10.77	0.18	0.15	0.22	
C.N. 1	0.15	5.21	0.74	0.71	0.64	7.14	0.41	6.05
C.N. 2	0.15	5.21	0.74	0.71	0.64	7.14	0.41	6.05
TRIP 13	1-20	1008	56	7	6	7	3	1214
V.H.	5.34	42.32	1.40	0.27	0.23	0.27	0.12	
C.N. 1	5.33	15.97	0.35	0.01	3.42	12.50	0.16	1.52
C.N. 2	5.33	15.97	0.35	0.01	3.42	12.50	0.16	1.52
TRIPS	0.032	0.03	0.005	1150	157	76	2076	12442
W.D.	15.76	0.10	0.08	50.20	0.00	0.03	1.76	16030
W.D.	15.76	0.10	0.08	50.20	0.00	0.03	1.76	7.56

GROUP

- No regulatory avionics
- Two-way communications
- Two-way communications VOR or ADF or RNAV
- Two-way communications VOR or RNAV
- 4096 code transponder Altitude encoding equipment
- Two-way communications VOR or RNAV
- 4096 code transponder Altitude encoding equipment

KEY

GROUP

- Two-way communications 4096 code transponder Altitude encoding equipment
- Two-way communications 4096 code transponder Altitude encoding equipment VOR } or RNAV DME }

TABLE 7. AIRCRAFT TYPE

	1	2	3	4	5	6	7	8	SUM
GLIDER	1121	1036	33	4	1	0	0	0	2195
ROW	51.07	47.20	1.50	0.18	0.05	0.0	0.0	0.0	
COLUMN	4.21	14.95	0.05	0.01	0.64	0.0	0.0	0.0	1.30
RAILROAD	298	50	3	2	5	7	0	1	366
ROW	81.42	13.66	0.82	0.55	1.37	1.91	0.0	0.27	
COLUMN	1.12	0.72	0.00	0.00	3.18	12.50	0.0	0.01	0.22
BLIMP/DIRIGIBLE	1	0	0	1	0	0	0	3	5
ROW	20.00	0.0	0.0	20.00	0.0	0.0	60.00	0.0	
COLUMN	0.00	0.0	0.0	0.00	0.0	0.0	0.10	0.0	0.00
FIXED WING SINGLE	23600	4171	65463	39974	100	24	2490	3295	138007
ROW	16.05	3.00	47.13	28.78	0.07	0.02	1.79	2.36	
COLUMN	87.86	60.19	95.31	73.15	63.65	42.86	63.61	26.00	82.18
FIXED WING MULTIPLE	446	95	2350	10757	42	10	433	9119	23252
ROW	1.92	0.41	10.11	46.26	0.18	0.04	1.86	39.22	
COLUMN	1.67	1.37	3.02	21.03	26.75	17.86	10.54	73.29	13.74
POTERCRAFT	1364	1573	836	412	9	15	52	37	4105
ROW	31.73	56.66	19.42	9.57	0.21	0.35	1.21	0.06	
COLUMN	5.13	22.77	1.22	0.61	5.73	26.79	1.75	0.30	2.55

TABLE 7. CONTINUED

GROUP	1	2	3	4	5	6	7	8
NOT REPORTED	0	0	0	0	0	0	0	0
ROW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
COLUMNS	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTALS	26632	6930	68685	51150	157	56	2978	12442
ROW	15.76	4.10	40.63	50.26	0.09	0.03	1.76	7.36

KEY

- | GROUP | KEY | GROUP | KEY |
|-------|----------------------------------------------|-------|----------------------------------------------------------------------------------------------------------|
| 1. | No regulatory avionics | 4. | Two-way communications
4096 code transponder
VOR or RNAV |
| 2. | Two-way communications | 5. | 4096 code transponder
Altitude encoding equipment
VOR or ADF or RNAV |
| 3. | Two-way communications
VOR or ADF or RNAV | 6. | Two-way communications
4096 code transponder
Altitude encoding equipment
VOR } or RNAV
DME } |
| | | 7. | Two-way communications
4096 code transponder
Altitude encoding equipment
VOR |
| | | 8. | Two-way communications
4096 code transponder
Altitude encoding equipment
VOR } or RNAV |

TABLE 8. ENGINE TYPE

	1	2	3	4	5	6	7	8	Sur ^r
RECIPROCATING									
RPM	25103	5622	66072	50258	141	43	2918	9530	161687
COLUMN	2	2	2	2	2	2	2	2	2
	15.53	5.44	42.10	31.08	0.09	0.03	1.40	5.09	
	94.26	41.13	99.11	98.26	89.61	76.79	97.99	76.60	95.66
TURBOPROP									
RPM	26	4	60	424	5	1	16	1695	2029
COLUMN	2	2	2	2	2	2	2	2	2
	1.28	0.20	2.98	20.90	0.25	0.05	0.79	73.58	
	0.10	0.06	0.09	0.93	3.18	1.79	0.54	12.00	1.20
TURBOSHRIFT									
RPM	38	224	502	365	1	4	42	31	1207
COLUMN	2	2	2	2	2	2	2	2	2
	3.15	16.50	41.59	30.24	0.08	0.35	3.48	2.57	
	0.14	3.23	0.75	0.11	0.64	7.14	1.41	0.25	0.71
TURBOJET									
RPM	61	11	19	48	4	1	2	1587	1583
COLUMN	2	2	2	2	2	2	2	2	2
	3.45	0.69	1.20	6.19	0.25	0.06	0.13	67.42	
	0.23	0.16	0.03	0.59	2.55	1.79	0.07	11.15	0.04
TURBINE AIR GEN.									
RPM	0	0	0	0	0	0	0	0	0
COLUMN	2	2	2	2	2	2	2	2	2
	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
PART II									
RPM	2	0	0	0	0	0	0	0	2
COLUMN	2	2	2	2	2	2	2	2	2
	100.00	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.00
	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.00

TABLE 8. CONTINUED

GROUP	1	2	3	4	5	6	7	8
NO ENGINE	1399	1069	32	5	6	7	0	1
ROW	55.54	42.46	1.27	0.20	0.24	0.28	0.0	0.04
COLUMN	5.25	15.43	0.75	0.01	3.82	12.50	0.0	0.01
								1.49
ANT REPORTED	3	0	0	0	0	0	0	3
ROW	100.00	0.0	0.0	0.0	0.0	0.0	0.0	0.00
COLUMN	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.00
TOTALS	26632	6930	68685	51150	157	56	2978	12442
ROW	15.76	4.10	40.63	30.26	0.09	0.03	1.76	7.36
COLUMN								

KEY

GROUP

KEY

- | GROUP | KEY | GROUP | KEY |
|---------------------------|---------------------------|---------------------------|-----------------------------|
| 1. No regulatory avionics | 4. Two-way communications | 7. Two-way communications | 7. Two-way communications |
| 2. Two-way communications | 4096 code transponder | 4096 code transponder | 4096 code transponder |
| 3. Two-way communications | VOR or RNAV | VOR | Altitude encoding equipment |
| VOR or ADF or RNAV | | VOR | VOR |
| | | | Altitude encoding equipment |
| | | | DME } or RNAV |
| | | | VOR } or RNAV |
| | | | DME } |

Preceding Page BLANK - ^{NOT} FILMED

TABLE 9. NUMBER OF ENGINES

	1	2	3	4	5	6	7	8	9	Sum
1.0.5	2.3741	1.7433	1.0293	0.7354	0.4711	0.3111	0.2117	0.13175		
1.1.5	17.431	4.012	4.6146	2.6113	1.6146	0.7343	0.4777	0.3132	0.2124	
1.2.5	45.178	11.532	10.812	7.8192	5.6151	3.6137	2.6120	1.6106	1.0110	
1.3.5	104	2289	10849	42	11	410	2697	22880		
1.4.5	1.07	0.745	0.614	0.414	0.214	0.114	0.0647	0.0447	0.0247	
1.5.5	1.61	1.355	1.013	2.0112	2.6115	1.6114	1.0114	71.51	13.51	
1.6.5	1.4110	4.0109	22.73	0.09	0.0	0.0	0.0	0.0	0.0	22
1.7.5	0.22	0.035	0.01	0.005	0.0	0.0	0.0	0.0	0.0	0.01
1.8.5	20	2	1.08	1.08	0	1	6	218	4.66	
1.9.5	4.13	2.41	2.6142	2.6135	0.02	0.21	1.615	4.1100	1.75	0.20
1.10.5	3.04	0.615	0.410	0.215	0.115	0.071	0.27			
1.11.5	0	0	0	0	0	0	0	0	0	0
1.12.5	2.010	1.010	0.610	0.410	0.210	0.110	0.060	0.040	0.020	0.010
1.13.5	1.010	1.010	0.610	0.410	0.210	0.110	0.060	0.040	0.020	0.010
1.14.5	0.010	0.010	0.010	0.010	0.010	0.010	0.010	0.010	0.010	0.010
TOTALS	16852	4043	11650	1157	56	2978	12442	160030		GROUP WEEK
MIN	15.70	4.16	80.63	50.20	0.09	0.03	1.76	7.36		

canada

• • • • •

- ANSWER

1. No regulatory avionics 2. Two-way communications 3. Two-way communications VOR or RNAV or ADF	4. Two-way communications 4096 code transponder VOR or RNAV	5. 4096 code transponder Altitude encoding equipment	6. Two-way communications 4096 code transponder Altitude encoding equipment
		7. Two-way communications 4096 code transponder Altitude encoding equipment VOR	8. Two-way communications 4096 code transponder Altitude encoding equipment VOR } or RNAV DMF } or DME

BEST AVAILABLE COPY

TABLE 10. NUMBER OF SEATS

	1	2	3	4	5	6	7	8	SUM
1 SEAT	6150	1569	617	105	16	6	7	10	8700
ROW %	70.69	18.26	9.39	1.21	0.18	0.07	0.08	0.11	
COLUMN %	23.09	22.93	1.19	0.21	10.19	10.71	0.24	0.08	5.15
2 SEATS	13774	2414	26033	3874	38	8	201	98	46640
ROW %	29.41	5.15	56.43	8.27	0.24	0.02	0.43	0.21	
COLUMN %	51.72	34.43	34.48	7.57	24.20	16.29	6.75	6.79	27.71
3 SEATS	3687	1455	3244	185	7	14	21	9	6621
ROW %	42.77	16.86	37.63	2.15	0.08	0.16	0.24	0.09	
COLUMN %	15.80	21.00	4.72	0.36	0.46	25.00	0.71	0.06	5.10
4 SEATS	2065	1088	32342	30616	46	13	1941	2330	70443
ROW %	2.93	1.54	45.91	45.46	0.07	0.02	2.76	3.31	
COLUMN %	7.75	15.70	47.09	59.86	30.57	23.21	65.18	18.73	41.67
5 SEATS	320	146	2462	5824	5	0	265	654	7676
ROW %	4.17	1.90	32.07	49.82	0.07	0.0	3.45	8.52	
COLUMN %	1.20	2.11	3.58	7.48	3.18	0.0	6.90	5.26	4.54
6 SEATS	246	32	2223	9471	29	9	411	4726	17197
ROW %	1.43	0.46	12.93	55.07	0.17	0.05	2.39	27.48	
COLUMN %	0.92	1.18	3.24	16.52	18.47	16.07	13.80	37.98	10.17

TABLE 10. CONTINUED

GROUP	1	2	3	4	5	6	7	8
7 - 11 SEATS	224	74	649	2395	12	5	99	3691
ROW	3.22	1.07	9.34	34.48	0.17	0.04	1.33	50.25
COLUMN	0.44	1.07	0.94	4.68	7.64	5.56	3.32	24.06
12 - 19 SEATS	97	62	166	225	1	1	12	415
ROW	9.93	6.55	16.99	22.82	0.10	0.10	1.73	42.46
COLUMN	0.36	0.89	0.24	0.34	0.64	1.79	0.40	5.34
20 - 49 SEATS	41	16	228	314	1	1	15	483
ROW	3.73	1.46	20.75	28.57	0.09	0.09	1.36	43.95
COLUMN	0.15	0.23	0.33	0.61	0.64	1.79	0.50	3.66
50 - UP SEATS	19	4	121	143	0	1	6	227
ROW	3.65	0.77	25.22	27.45	0.0	0.19	1.15	43.57
COLUMN	0.07	0.06	0.18	0.28	0.6	1.79	0.20	1.62
ANT REPORTED	9	0	0	0	0	0	0	9
ROW	100.00	0.0	0.0	0.0	0.0	0.0	0.0	0.0
COLUMN	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.01
TOTALS	26632	6930	68685	51150	157	56	2078	12442
ROW	15.76	4.10	40.63	30.26	0.09	0.03	1.76	7.36
KEY								
GROUP								
1. No regulatory avionics								
2. Two-way communications								
3. Two-way communications VOR or ADP or RNAV								
4. Two-way communications 4096 code transponder VOR or RNAV								
5. 4096 code transponder Altitude encoding equipment								
6. Two-way communications 4096 code transponder Altitude encoding equipment								

GROUP

1. No regulatory avionics
2. Two-way communications
3. Two-way communications VOR or ADP or RNAV
4. Two-way communications 4096 code transponder VOR or RNAV
5. 4096 code transponder Altitude encoding equipment
6. Two-way communications 4096 code transponder Altitude encoding equipment

KEY

7. Two-way communications 4096 code transponder Altitude encoding equipment VOR
8. Two-way communications 4096 code transponder Altitude encoding equipment VOR { or RNAV DME }

TABLE 11. PRIMARY USE

	L	L G	L M	L M G	RNAV	W RAD	1,9	1,8	ALL	1, G	CAT	W _f
REFRIGERATIVE	267	21	184	5442	1471	3629	244	2465	1153	574	5254	
RDN _a %	3.32	0.34	2.95	47.11	23.59	58.19	4.55	39.50	11.09	6.00		
COLUMN %	1.10	2.55	0.81	12.25	13.50	47.30	7.97	46.07	5.277	0.47	3.69	
BUSINESS	1796	160	4407	11732	2571	1930	1549	674	336	6249	24639	
RDN _a %	7.25	0.64	17.74	47.51	10.35	4.15	5.19	2.71	1.55	25.16		
COLUMN %	9.54	10.42	19.49	26.20	23.60	13.44	57.56	12.61	1.518	7.34	14.70	
PERSIMILAR	6416	260	10023	9128	3106	218	764	116	59	28864	55506	
RDN _a %	12.20	0.49	17.69	16.41	5.62	0.38	1.35	0.21	0.10	50.91		
COLUMN %	36.49	33.98	44.33	20.54	20.25	2.44	21.05	2.1	2.70	56.41	33.52	
AERIAL APPLICATION	119	5	47	121	45	21	6	19	2	5273	3546	
RDN _a %	3.31	0.14	1.31	3.16	1.25	0.58	0.22	0.53	0.06	91.02		
COLUMN %	0.53	0.61	0.21	0.27	0.41	0.27	0.22	0.36	0.09	4.13	2.13	
INSTRUCTION	2441	32	893	1839	257	32	66	22	0	3654	4053	
RDN _a %	27.26	0.16	9.92	20.54	2.87	0.36	0.74	0.25	0.10	60.91		
COLUMN %	15.02	5.88	3.93	4.15	2.36	0.42	1.85	0.41	0.41	4.61	5.30	
AIR TAXI	236	24	549	260	565	702	200	565	135	871	4447	
RDN _a %	6.43	0.54	7.71	65.35	9.21	15.79	4.50	12.71	3.04	19.59		
COLUMN %	1.53	2.91	1.52	6.55	3.35	9.16	5.61	10.57	6.18	1.10	2.63	

TABLE 11. CONTINUED

GROUP	L	LG	LM	LMG	RNAV	WRAD	I,R	I,W	ALL	NG	
TELESTRAIL / SPECIAL	327	18	145	379	52	35	17	25	6	969	1793
20 ^a Z	18.24	1.00	4.09	21.14	2.90	1.95	0.95	1.39	0.33	50.70	
CRUISE Z	1.74	2.16	0.64	0.35	0.48	0.46	0.46	0.47	0.27	1.15	1.06
.....
AIRCRAFT RENTAL H.S.	161.0	55	756	177	62	11	21	21	6	1096	5369
91 ^a Z	19.14	0.66	14.88	32.57	3.33	1.19	1.45	0.70	0.49	31.95	
CRUISE Z	5.42	4.25	3.49	3.90	1.62	0.82	2.16	0.69	1.19	2.14	3.14
.....
TRAILER	360	14	173	686	132	220	41	153	65	1346	2531
87 ^a Z	11.85	0.75	6.84	26.87	5.22	6.69	1.62	6.05	2.57	53.16	
CCU-344 Z	1.60	1.70	0.77	1.53	1.21	2.87	1.15	2.86	2.87	1.70	1.50
.....
TRAILER/OUT REPLICATED	5342	215	5610	10379	2638	1716	769	1270	394	32040	54600
20 ^a Z	9.77	0.47	10.26	14.99	4.63	3.14	1.41	2.32	0.72	58.62	
CRUISE Z	28.39	28.52	24.61	23.41	24.22	22.38	21.57	23.76	18.03	49.42	32.34
.....
TRAILERS	14750	824	22610	46345	10694	7666	3565	5346	2185	79276	169030
20 ^a Z	11.09	0.49	13.18	26.23	6.45	4.54	2.11	3.16	1.29	46.90	
.....

KEY

GROUP
L: Localizer

W, WRAD: Weather radar

I, LMG: Complete ILS system

M: Marker beacon

G: Glide slope

R, RNAV: Area navigation system

NG: Non-grouped aircraft

TABLE 12. BASE AIRPORT REGION

	L	L G	L M	LNG	RNAV	WRAF	I, R	I, W	ALL	N G	CNT
NEW ENGLAND	726	26	874	1595	311	1A1	102	124	52	2905	6221
ROW ^a	11.69	0.42	14.08	25.53	5.01	2.92	1.64	2.00	0.84	46.79	
COLUMN ^b	3.67	3.16	3.87	3.57	2.65	2.36	2.46	2.32	2.38	3.66	3.67
EASTERN	2505	97	3762	6175	1444	1214	456	656	538	8945	21823
ROW ^a	11.48	0.44	17.24	28.30	6.62	5.56	2.09	3.92	1.55	40.99	
COLUMN ^b	13.36	11.77	16.64	13.92	13.26	15.84	12.79	16.01	15.47	11.28	12.01
SOUTHERN	2877	142	3059	7471	1902	1690	655	1145	551	10607	24623
ROW ^a	11.68	0.58	12.42	30.34	7.72	6.86	2.66	4.60	2.16	43.08	
COLUMN ^b	15.34	17.23	15.53	16.85	17.46	22.05	18.37	21.38	20.30	13.38	14.57
GREAT LAKES	3730	133	4943	8083	2177	1637	651	1165	446	15061	32603
ROW ^a	11.44	0.41	15.16	29.79	6.68	5.02	2.00	3.57	1.37	46.20	
COLUMN ^b	19.89	16.14	21.86	18.23	19.98	21.35	18.26	21.79	20.41	19.00	19.29
CENTRAL	1510	61	1423	2881	790	497	262	324	160	5998	11919
ROW ^a	10.99	0.51	11.94	24.17	6.63	4.17	2.20	2.72	1.34	50.32	
COLUMN ^b	6.99	7.40	6.29	6.50	7.25	6.46	7.35	6.06	7.32	7.57	7.05
ROCKY MOUNTAINS	450	42	602	1106	535	223	151	150	65	4746	8685
ROW ^a	10.94	0.48	10.16	20.79	6.16	2.57	1.74	0.76	55.04		
COLUMN ^b	5.07	5.10	3.40	4.07	4.91	2.41	4.28	2.61	5.02	6.03	5.14

TABLE 12. CONTINUED

	L	LG	LM	LNG	RNAV	WRAD	I, R	I, W	ALL	NG
WINTERSTEIN	1033	40	1249	2066	470	156	149	117	27	5199 96%5
ROW ^a	10,67	0.41	12,91	21,35	4,65	1,61	1,50	1,21	0,28	52,65
COLUMN ^b	5,51	0,65	5,32	4,66	0,31	2,03	0,10	2,10	1,24	6,43
STEPN	2711	107	5951	7217	1394	554	56	596	147	12179 26,96
ROW ^a	10,28	0,40	14,51	27,24	5,27	2,09	2,06	1,40	0,55	45,76
COLUMN ^b	14,46	12,99	17,03	16,27	12,81	7,23	15,32	7,41	6,73	15,38 15,88
SUMMERSTEIN	2351	144	2306	6465	1426	553	1006	400	10674	22,95
ROW ^a	10,59	0,64	10,51	28,96	7,35	6,37	2,47	0,96	1,70	67,46
COLUMN ^b	12,54	11,48	10,21	14,62	15,10	14,60	15,31	18,62	14,31	13,46 13,25
PACIFIC	50	5	19	83	16	10	4	6	4	217 370
ROW ^a	11,19	1,32	5,01	21,90	4,22	2,54	1,06	1,56	1,06	57,26
COLUMN ^b	0,27	0,61	0,08	0,19	0,15	0,13	0,11	0,11	0,18	0,27 0,22
ALASKAN	452	23	221	375	197	61	33	29	6	2768 39,85
ROW ^a	11,40	0,58	5,62	9,46	4,97	1,03	0,93	0,73	0,20	69,56
COLUMN ^b	2,31	2,79	0,99	0,95	1,61	0,53	0,54	0,54	0,57	5,48 2,35
ENGLIGN	55	4	17	116	11	17	3	30	6	53 247
ROW ^a	22,27	1,62	6,56	46,96	4,45	14,98	1,21	12,15	2,43	21,46
COLUMN ^b	0,49	0,08	0,26	0,26	0,10	0,08	0,08	0,56	0,27	0,07 0,15
TOTALS	14750	824	22610	44345	10394	7666	5565	5346	2145	79276 16,930
ROW ^a	11,09	0,49	15,36	26,23	6,45	4,54	2,11	3,16	1,29	46,90
COLUMN ^b										

KEY

GROUP
L: Localizer

W, WRAD: Weather radar

M: Marker beacon

I, LNG: Complete ILS system

G: Glide slope

R, RNAV: Area navigation system

All: I, R, and W

NG: Non-grouped aircraft

TABLE 13. HOURS FLOWN

	L	L G	L M	L MG	RNAV	IRAD	I R	I, M	ALL	NG	CNT
1 = 49	2519	88	2334	2524	1178	264	210	170	78	15072	23163
R0W	10.47	0.38	10.07	10.89	5.08	1.14	0.91	0.73	0.34	65.01	
COLUMN	13.45	10.68	10.32	5.69	10.81	3.44	5.89	3.18	3.57	19.01	13.72
50 = 99	3009	123	4170	4475	1534	242	403	170	92	11927	24342
R0W	12.36	0.51	17.13	18.38	6.30	1.16	1.66	0.70	0.38	49.00	
COLUMN	16.65	14.03	16.44	10.09	14.04	3.68	11.30	3.14	4.21	15.04	14.27
100 = 149	2174	123	5600	5505	1524	404	518	276	113	6534	16319
R0W	11.87	0.67	19.65	30.05	7.25	2.71	2.83	1.51	0.62	35.69	
COLUMN	11.59	14.93	15.92	12.41	12.15	5.27	14.53	5.18	5.17	6.25	10.84
150 = 169	1044	62	2114	4036	826	345	379	257	118	3023	10441
R0W	10.00	0.59	20.25	38.66	7.91	3.69	3.63	2.46	1.13	29.01	
COLUMN	5.57	7.52	9.35	9.10	7.58	5.02	10.63	4.81	5.40	5.92	6.18
200 = 249	856	53	1537	3884	799	509	383	340	164	2303	8747
R0W	9.79	0.61	17.57	44.40	9.13	5.62	4.38	3.69	1.87	26.33	
COLUMN	4.57	6.43	6.80	8.76	7.53	6.64	10.74	6.36	7.51	2.91	5.17
250 = 296	463	24	754	2206	448	451	218	322	127	1350	5069
R0W	9.69	0.47	15.52	46.92	8.80	8.86	4.28	6.33	2.50	26.53	
COLUMN	2.63	2.91	3.49	5.39	4.11	5.88	6.12	6.02	5.81	1.70	3.01

TABLE 13. CONTINUED

GROUP	L	LG	LM	LWC	RNAV	WRAD	I, R	I, W	ALL	NG
351 - 354	0.23	2.6	0.57	2.43	4.69	5.45	1.97	5.96	1.67	1.542
355 - 358	10.50	0.59	17.93	47.97	9.63	11.52	5.96	7.40	3.64	5.60
359 - 362	2.79	2.43	1.91	5.30	4.49	7.63	5.93	7.41	6.56	27.40
363 - 366	3.54	2.4	5.64	15.34	5.13	4.66	1.03	1.29	1.58	5.91
367 - 370	10.90	0.79	11.95	50.34	10.27	15.95	3.38	10.86	5.12	25.14
371 - 374	1.75	2.91	1.61	3.46	2.67	6.34	2.98	6.15	7.14	0.97
375 - 378	12.64	0.45	4.67	49.49	9.27	15.96	2.61	10.86	5.03	1.60
379 - 382	2.12	1.70	1.57	3.50	2.67	6.54	2.58	6.36	7.23	1.66
383 - 386	20.59	5.6	11.24	56.29	10.94	20.83	2.83	1.01	1.58	4.60
387 - 390	15.86	0.45	6.66	45.36	6.12	16.05	2.26	11.38	6.61	31.40
391 - 394	16.06	7.04	4.97	12.69	6.68	27.17	8.22	27.59	26.75	1.66
395 - 398 FLIR	7.14	4.2	4.20	7.68	5.41	1.91	5.0	1.35	4.4	4019
399 - 402	4.96	0.29	2.92	5.55	2.37	1.33	0.35	0.94	0.31	12982
403 - 406	3.41	5.10	1.46	1.86	5.13	2.49	1.40	2.53	2.01	7.46
407 - 410	4.28	1.93	51.90	95.81	22.97	1.23	7.19	11.35	3.50	1.9852
411 - 414	11.49	0.46	12.49	23.79	5.70	1.79	2.02	0.67	4.67	40279
415 - 418	24.68	25.42	22.95	21.01	21.06	19.89	20.17	21.23	18.02	25.04
419 - 422	18.50	6.24	22.610	44.545	11.894	7.666	5.665	5.346	21.85	79276
423 - 426	11.09	0.49	13.38	26.23	6.45	4.54	2.11	3.16	1.29	169450

KEY

GROUP

L: Localizer

M: Marker beacon

G: Glide slope

R, RNAV: Area navigation system

GROUP

W, WRAD: Weather radar

I, LNC: Complete ILS system

All: I, R and R

NG: Non-grouped aircraft

TABLE 14. AGE OF AIRCRAFT

	L	L G	L M	L MG	RNAV	WRAD	I, R	I, h	ALL	N G	CNT
0 - 4 YEARS	4239	131	2432	10789	2236	2101	927	1137	950	10424	28243
RDN %	15.01	0.46	8.61	58.20	7.92	7.44	3.28	4.03	3.36	36.91	
COLUMN %	22.61	15.90	10.76	24.33	20.53	27.41	26.00	21.27	43.4H	13.15	16.71
5 - 10 YEARS	5502	219	8077	15476	3415	2775	1253	2157	581	16512	46691
RDN %	11.74	0.47	17.50	51.15	7.31	5.94	2.69	4.62	1.24	35.36	
COLUMN %	29.34	26.58	35.72	34.40	31.35	36.20	35.15	40.35	26.59	20.83	27.52
11 - 15 YEARS	2586	137	5152	7549	1787	750	598	570	150	9095	25069
RDN %	10.32	0.55	20.55	50.11	7.13	2.99	2.39	2.27	0.60	36.28	
COLUMN %	15.79	16.63	22.79	17.02	16.40	9.78	16.77	10.66	6.86	11.47	14.83
16 - 20 YEARS	2187	124	3663	4425	1383	439	351	330	93	8570	19487
RDN %	11.22	0.64	18.80	22.71	7.10	2.25	1.80	1.69	0.48	43.62	
COLUMN %	11.66	15.05	16.20	9.98	12.70	5.73	9.85	6.17	4.26	10.72	11.53
21 - 25 YEARS	1086	69	1282	1276	453	177	79	157	31	4651	8594
RDN %	12.64	0.40	14.92	14.95	5.27	2.06	0.92	1.59	0.36	54.12	
COLUMN %	5.79	8.37	5.67	2.88	4.16	2.31	2.22	2.56	1.42	5.87	5.08
26 - 30 YEARS	1072	55	127A	AH7	759	130	61	99	23	18576	23329
RDN %	6.45	0.24	5.08	3.00	3.25	0.56	0.26	0.42	0.10	79.63	
COLUMN %	10.52	6.67	5.65	2.00	6.97	1.70	1.71	1.85	1.05	25.43	13.60

TABLE 14. CONTINUED

GROUP	L	LG	LM	LMG	RNAV	WRAD	I,R	I,W	ALL	NG
31 - 35 YEARS	215	25	86	580	124	217	22	176	35	4917
RDN X	3.65	0.42	1.66	9.86	2.11	3.69	0.37	2.99	0.59	83.57
COLUMN X	1.15	3.03	0.38	1.51	1.14	2.83	0.62	3.29	1.60	6.20
OVER 35 YEARS	49	0	19	84	20	1A	4	16	2	1635
RDN X	2.72	0.0	1.05	4.66	1.11	1.00	0.22	0.89	0.11	90.76
COLUMN X	0.26	0.0	0.08	0.19	0.16	0.23	0.11	0.30	0.09	2.06
UNIT REPUTATION	914	64	621	3279	717	1059	270	724	320	4966
RDN X	0.20	0.64	6.25	33.01	7.22	10.66	2.72	7.29	5.22	50.00
COLUMN X	0.67	7.77	2.75	7.39	6.56	13.81	7.57	15.54	10.65	6.26
TOTALS	10750	824	22610	44545	10894	7666	3565	5316	2185	7976
RDN X	11.09	0.49	13.38	26.25	6.45	4.54	2.11	3.16	1.29	46.90

KEYGROUP
L: Localizer

W, WRAD: Weather radar

M: Marker beacon

I, LMG: Complete ILS system

G: Glide slope

ALL: I, R and W

R, RNAV: Area navigation system

NG: Non-grouped aircraft

TABLE 15. COMPUTED AIRCRAFT TYPE

	L	L G	L M	L MG	RNAV	MRAO	I, R	I, W	ALL	N G	CNT
Type 1	H248	151	2767	1295	1670	36	57	7	5	45401	59005
Row 1	0.08	0.22	0.69	2.19	2.43	0.46	0.10	0.01	0.01	76.77	
Column 2	13.98	15.90	12.24	2.92	15.33	0.44	1.70	0.13	0.23	57.14	34.01
Type 2	9922	586	18919	21881	5206	145	1629	40	32	26603	79748
Row 2	0.44	0.73	25.72	27.44	6.53	0.14	2.29	0.05	0.04	33.36	
Column 3	12.92	71.12	83.08	49.34	47.79	1.60	51.30	0.75	1.46	35.56	47.18
Type 3	148	56	831	12350	1920	1536	1329	1038	491	516	15939
Row 3	1.08	0.42	5.98	88.60	13.77	11.02	9.53	7.45	5.52	3.70	
Column 4	0.79	7.04	3.08	27.65	17.62	20.04	37.28	10.42	22.47	0.85	8.25
Type 4	89	2n	45	5085	981	2574	288	1879	645	327	5579
Row 4	1.60	0.36	0.81	91.15	17.62	46.14	5.16	33.68	12.28	5.96	
Column 5	0.47	2.43	0.20	11.47	9.02	33.58	8.08	35.15	31.35	0.41	3.30
Type 5	6	1	1	209	39	159	2	122	36	61	240
Row 5	2.14	0.56	0.56	74.64	13.93	56.79	0.71	43.57	12.66	21.79	
Column 6	0.03	0.12	0.00	0.47	0.36	2.07	0.06	2.28	1.65	0.08	0.17
Type 6	1	1	3	1360	441	1323	6	690	430	18	1383
Row 6	0.07	0.07	0.22	96.34	31.89	95.66	0.58	64.35	31.09	1.30	
Column 7	0.01	0.12	0.01	3.07	4.05	17.26	0.22	16.65	19.66	0.02	0.82

TABLE 15. CONTINUED

GROUP	KEY	GROUP
L:	Localizer	W, WRAD: Weather radar
M:	Marker beacon	I, ICG: Complete ILS sys
G:	Glide slope	ALL: I, R and W
R:	RNAV: Area navigation system	NG: Non-grouped aircraft

TABLE 16. AIRCRAFT TYPE

		L	I.G.	L.M.	L.MG.	RNAV	MHAD	I.P.	I.M.	ALL	N.G.	CNT -
GLIDER		0	0	0	1	7	0	0	0	0	0	2195
ROW	1	0.36	0.0	0.0	0.05	0.12	0.0	0.0	0.0	0.0	99.27	
COLUMN	2	0.04	0.0	0.0	0.00	0.06	0.0	0.0	0.0	0.0	2.75	1.30
WALL/ICON		0	0	0	0	6	0	0	0	0	0	366
ROW	1	0.0	0.0	0.0	0.0	1.64	0.0	0.0	0.0	0.0	98.38	
COLUMN	2	0.0	0.0	0.0	0.0	0.06	0.0	0.0	0.0	0.0	0.45	0.22
CLIPPER/DIGITAL		0	0	3	1	0	2	0	0	0	0	1
ROW	1	0.0	0.0	60.00	20.00	0.0	40.00	0.0	0.0	0.0	20.00	
COLUMN	2	0.0	0.0	0.01	0.00	0.03	0.03	0.0	0.0	0.0	0.00	0.00
FIXED WING SINGLE		16200	725	21690	25220	6879	1A1	1669	48	37	71971	136907
ROW	1	13.10	0.52	15.61	15.72	4.95	0.13	1.36	0.03	0.01	51.01	
COLUMN	2	97.07	97.99	95.93	52.36	65.14	2.36	52.99	0.90	1.69	90.79	82.18
FIXED WING MULTIPLE		200	82	880	21057	3913	7470	1652	5296	2146	933	23252
ROW	1	1.05	0.45	3.78	90.56	16.83	32.13	7.10	22.78	9.23	4.01	
COLUMN	2	1.30	9.95	3.89	47.48	35.92	97.48	46.34	99.06	98.22	1.18	13.76
ANTICRAFT		200	17	37	65	67	13	24	2	2	3832	4305
ROW	1	6.92	0.39	0.86	1.53	2.07	0.30	0.56	0.05	0.05	89.01	
COLUMN	2	1.59	2.06	0.16	0.15	0.62	0.17	0.67	0.04	0.04	4.83	2.55

TABLE 16. CONTINUED

GROUP	L	LG	LM	LMG	RNAV	WRAD	I, R	I, W	ALL	NG
NOT REPRINTED	0	0	0	0	0	0	0	0	0	0
RDN	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
COLUMBIA	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTALS	18750	624	22610	#4345	10894	7666	5565	5346	2165	79276
RDN	11.09	0.49	13.38	26.23	6.45	4.54	7.11	3.16	1.29	46.90

KEY

- | GROUP | KEY | GROUP | |
|-------|------------------------------|-------|--------------------------|
| L: | Localizer | W, | WRAD: Weather radar |
| M: | Marker beacon | I, | LMG: Complete ILS system |
| G: | Glide slope | ALL: | I, R and W |
| R, | RNAV: Area navigation system | NG: | Non-grouped aircraft |

TABLE 17. ENGINE TYPE

	L	L.G.	L.M.	LNG	RNAV	RAD	I.R.	I.R.	ALL	N.G.	C.T.
AIRCRAFTING	10003	600	22571	40830	9844	4454	5505	3008	1250	7549	16167
R/HW	11.43	0.49	15.76	21.05	6.09	2.75	2.17	1.91	0.77	46.90	
COLUMN %	98.58	97.99	99.63	92.07	90.36	58.10	98.32	57.75	57.21	95.65	95.60
TRUNKED	26	2	7	1963	53H	1747	34	1262	501	50	2720
R/HW	1.24	0.10	0.34	44.75	26.52	87.00	1.64	62.20	26.45	1.42	
COLUMN %	0.14	0.24	0.03	44.33	44.94	23.05	0.05	23.61	22.93	0.04	1.20
TRUSTY JET	229	15	30	57	64	9	24	0	1	845	1227
R/HW	16.97	1.08	2.40	4.77	5.30	0.75	1.99	0.0	0.04	70.01	
COLUMN %	1.22	1.54	0.15	0.13	0.59	0.17	0.57	0.0	0.05	1.67	0.71
OTHER JET	5	9	2	1404	436	1436	2	996	433	687	1543
R/HW	0.32	0.57	0.13	94.16	27.54	90.71	0.15	62.97	27.35	4.50	
COLUMN %	0.03	1.09	0.01	5.37	44.00	18.73	0.06	16.63	10.82	0.05	0.94
STURGEON AIR GEN.	0	0	0	0	0	0	0	0	0	0	0
R/HW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
COLUMN %	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
JET	0	0	0	0	0	0	0	0	0	2	2
R/HW	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	100.00	
COLUMN %	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.00	0.00

TABLE 17. CONTINUED

KEY

GROUP

Group Localizer

二三

M: Marker beacon

G: Guide alone

NC 6 NOVEMBER 1966

- 10 -

GROUP W: WRAD: Weather radar

I, IMLC: Complete ILS system

All: T B and W

61/62

Preceding Page BLANK - FILMED ^{NOT}

TABLE 18. NUMBER OF ENGINES

KEY GROUP

L: Localizer

i

M: Marker beacon

2-2161

G: Glide slope

WRAD: Weather rad

תְּהִלָּה

卷之三

ALL: I, R and W

TABLE 19. NUMBER OF SEATS

	L	L.G.	L.M.	LNG	RNAV	WRAD	I.R.	I.W.	ALL	NG	CNT
1 SEAT	222	11	18	71	74	4	4	1	1	6309	8700
ROW	2.55	0.13	0.21	0.82	0.85	0.05	0.05	0.01	0.01	95.51	
COLUMN	1.18	1.33	0.08	0.16	0.68	0.05	0.11	0.02	0.05	10.48	5.15
2 SEATS	7452	118	2672	1259	1465	30	53	8	5	34258	46840
ROW	15.91	0.25	5.70	2.69	5.13	0.06	0.11	0.02	0.01	73.14	
COLUMN	39.74	14.32	11.82	2.84	13.45	0.39	1.69	0.15	0.14	43.21	27.71
3 SEATS	644	12	94	43	164	11	3	7	2	7668	8021
ROW	7.47	0.14	1.09	0.50	1.90	0.13	0.03	0.08	0.02	69.18	
COLUMN	3.43	1.46	0.42	0.10	1.51	0.16	0.08	0.13	0.09	9.70	5.10
4 SEATS	9094	499	16625	17444	4403	132	1368	39	25	25114	70443
ROW	12.91	0.71	25.60	24.76	6.25	0.19	1.94	0.06	0.04	35.65	
COLUMN	48.50	60.56	73.53	59.34	40.42	1.72	38.57	0.73	1.14	31.68	41.67
5 SEATS	574	68	1400	3756	551	69	311	44	21	1765	7676
ROW	7.48	0.89	18.24	48.93	7.18	0.90	4.05	0.57	0.27	22.99	
COLUMN	5.06	6.25	6.19	6.47	5.06	0.90	8.72	0.82	0.96	2.23	4.54
6 SEATS	606	84	1734	15514	2528	1742	1498	1154	576	1336	17197
ROW	3.52	0.49	10.08	77.42	13.54	10.13	8.71	6.71	3.35	7.77	
COLUMN	3.23	10.14	7.67	50.02	21.37	42.12	21.37	12.37	26.56	1.66	10.17

TABLE 19. CONTINUED

GROUP	L	LG	LM	LMG	RNAV	WRAD	I, R	I, W	ALL	NG
7 - 11 SEATS	115	21	55	6335	1439	4152	261	2974	1164	434
RNAV %	1.66	0.30	0.76	90.87	20.11	59.77	3.76	42.81	16.76	6.25
COLUMN %	0.61	2.55	0.23	14.24	13.21	54.16	7.32	55.63	53.27	0.55
12 - 19 SEATS	21	3	6	686	145	460	26	369	107	249
RNAV %	2.15	0.31	0.61	70.21	10.84	47.08	2.67	35.72	10.95	25.49
COLUMN %	0.11	0.36	0.03	1.55	1.33	6.00	0.79	6.53	0.90	0.31
20 - 49 SEATS	22	6	4	979	226	650	33	451	193	81
RNAV %	2.00	0.73	0.36	69.08	20.56	59.14	3.00	41.04	17.56	7.37
COLUMN %	0.12	0.97	0.02	2.21	2.07	8.48	0.93	8.44	0.83	0.10
50 - UP SEATS	0	0	4	480	99	416	6	319	93	33
RNAV %	0.0	0.0	0.77	92.11	19.00	79.85	1.15	61.23	17.85	6.33
COLUMN %	0.0	0.0	0.02	1.08	0.91	5.43	0.17	5.97	4.26	0.04
NOT REPORTED	0	0	0	0	0	0	0	0	0	0
NO.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
TOTALS	18750	624	22610	44345	10894	7666	3565	5346	2165	79276
RNAV %	11.09	0.49	13.38	26.23	6.45	4.54	2.11	5.16	1.29	46.90
COLUMN %	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01

KEY GROUP

L: Localizer

W, WRAD: Weather radar

M: Marker beacon

I, LMG: Complete ILS system

G: Glide slope

ALL: I, R and W

R, RNAV: Area navigation system

NG: Non-grouped aircraft

TABLE 20. SUBGROUPS OF HIERARCHICAL CAPABILITY GROUPS

Primary Use	Hours Flown	Age in Years	Computed Aircraft Type ¹	GROUPS				
				1	2	3	4	7
1.	Not Flown	0-25	1	1278 5.2%	209 3.1%			
2.	Not Flown	26+	1	3982 16.3%	276 4.1%			
3. Personal	1-100		1	5437 22.2%	1010 15.2%	8251 12.2%		
4. Personal	100-400		1		235 3.5%			
5.	100-400	26+	1	1013 4.1%				
6. Personal	100-400					9720 19.3%	1075 8.8%	
7. Personal	1-100		2		180 2.7%	10310 15.2%	5328 10.6%	
8. Personal	1-100	0-10	13			345 5.2%		
9. Personal	1-100	0-10		1236 5.1%				
10. Aerial Application		0-10	1	1359 5.6%	134 2.1%			
11. Personal	100-400		2			4498 6.6%		
12.	1-100	11-25	2				198 6.7%	
13. Personal	100-400	0-10	2				307 10.4%	
14. Business		11-25	2			2786 4.1%	3192 6.3%	
15.	100-400	0-10	1			4429 6.5%		
16.	100-400	0-10	13		197 3.0%			
17.	100-400	11-25	2				385 13.1%	
18.	1-100	0-10	2				247 8.4%	
19. Business	100-400	0-10	2			3648 7.2%	285 9.7%	695 5.7%
20. Air Taxi		0-10						751 6.1%
21.		0-10	11		605 9.1%			
22. Business	100-400	0-10	3					889 7.2%
23. Executive	100-400	0-10	14					1115 9.1%
24.	400+	0-10			4262 6.3%	4499 8.9%	263 8.9%	
25. Executive	400+	0-10	14					1301 10.6%
			Counts	26632	6930	68685	51150	2978
			Unuseable	2181	278	950	671	28
			% in Sub- groups ²	58.5	48.0	50.9	52.3	42.8
								12442 164 47.5

1. Type

- 1 Fixed wing single engine piston 1-3 seats
- 2 Fixed wing single engine piston 4+ seats
- 3 Fixed wing 2 engine piston 1-6 seats

11 Piston Rotorcraft

13 Other

15 Fixed wing 2 engine

2. % is based on the capability group count minus the number of unuseable aircraft.

TABLE 21. SUBGROUPS OF NON-HIERARCHICAL CAPABILITY GROUPS

Primary Use	CHARACTERISTICS			Computed Aircraft Type ¹	NG	GROUPS							
	Hours Flown	Age in Years				1	3	4	5	6	7	8	9
1.	Not Flown		1	7039 9.0%									
2.	Not Flown		2	2193 2.8%									
3. Personal	1-100	26+	1	7190 9.2%									
4. Personal	1-100	11-25										118 3.4%	
5. Personal	1-100	11-25	2		1438 7.8%	2350 10.5%							
6. Personal	1-100		2	7411 9.5%			2340 5.4%	1101 10.2%					
7.	1-100	0-10	1	4100 5.2%	1037 5.6%								
8. Personal	100-400	11-25	2			2066 9.2%							
9. Personal	100-400		2	3316 4.2%									
10. Personal		0-10	2									330 3.4%	
11. Business	100-400	11-25	2	1069 4.8%									
12.	100-400	0-10	1	4228 5.4%	1533 8.3%								
13.	100-400	11-25	2		1388 7.5%		3074 7.0%	837 7.8%				254 7.2%	
14.	1-100	0-10	2		932 5.0%	1844 8.2%							
15.	400+	0-10	1	2450 3.1%	1395 7.5%								
16. Business	100-400	0-10	2									341 9.7%	
17.	100-400	0-10	2		1521 8.2%	4035 17.9%	6858 15.7%	1058 10.1%					
18.	100-400	11-25	3				2082 4.8%					202 5.7%	
19.	400+	0-10	2		604 .3%	790 3.5%	2183 5.0%						
20. Business		0-10	3									352 10.0%	
21.	100-400	0-10	3			3444 7.9%	657 6.1%	588 7.9%				378 7.3%	209 9.8%
22.	400+	0-10	3			1155 2.6%		326 4.4%				221 4.2%	105 4.9%
23.		0-10	4			1994 4.6%	537 5.0%	1272 17.0%	115 3.3%			845 16.2%	422 19.8%
24.		0-10	6			1103 2.5%	352 3.3%	1081 14.5%				732 14.0%	347 16.3%
				Counts Unuseable % in Sub- Groups ²	79276 906 48.4	18750 213 53.2	22610 128 54.1	44345 671 55.5	10894 129 47.2	7666 192 43.8	3565 44 48.7	5346 133 41.7	2185 53 50.8

1. Type

- 1 Fixed wing single engine piston 1-3 seats
- 2 Fixed wing single engine piston 4+seats
- 3 Fixed wing 2 engine piston 1-6 seats
- 4 Fixed wing 2 engine piston 7+ seats
- 6 Fixed wing 2 engine piston 1-12 seats

2. % is based on the capability group count minus the number of unuseable aircraft.

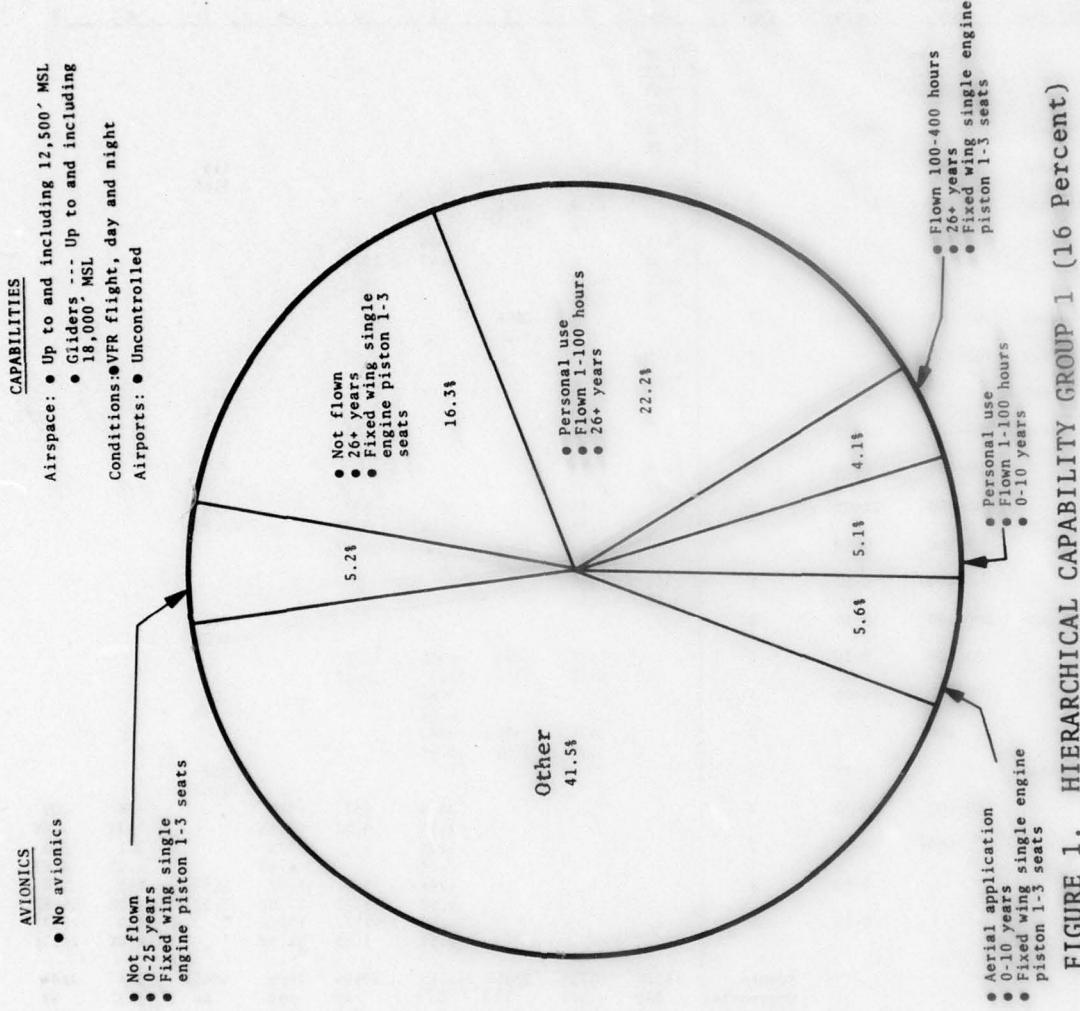


FIGURE 1. HIERARCHICAL CAPABILITY GROUP 1 (16 Percent)

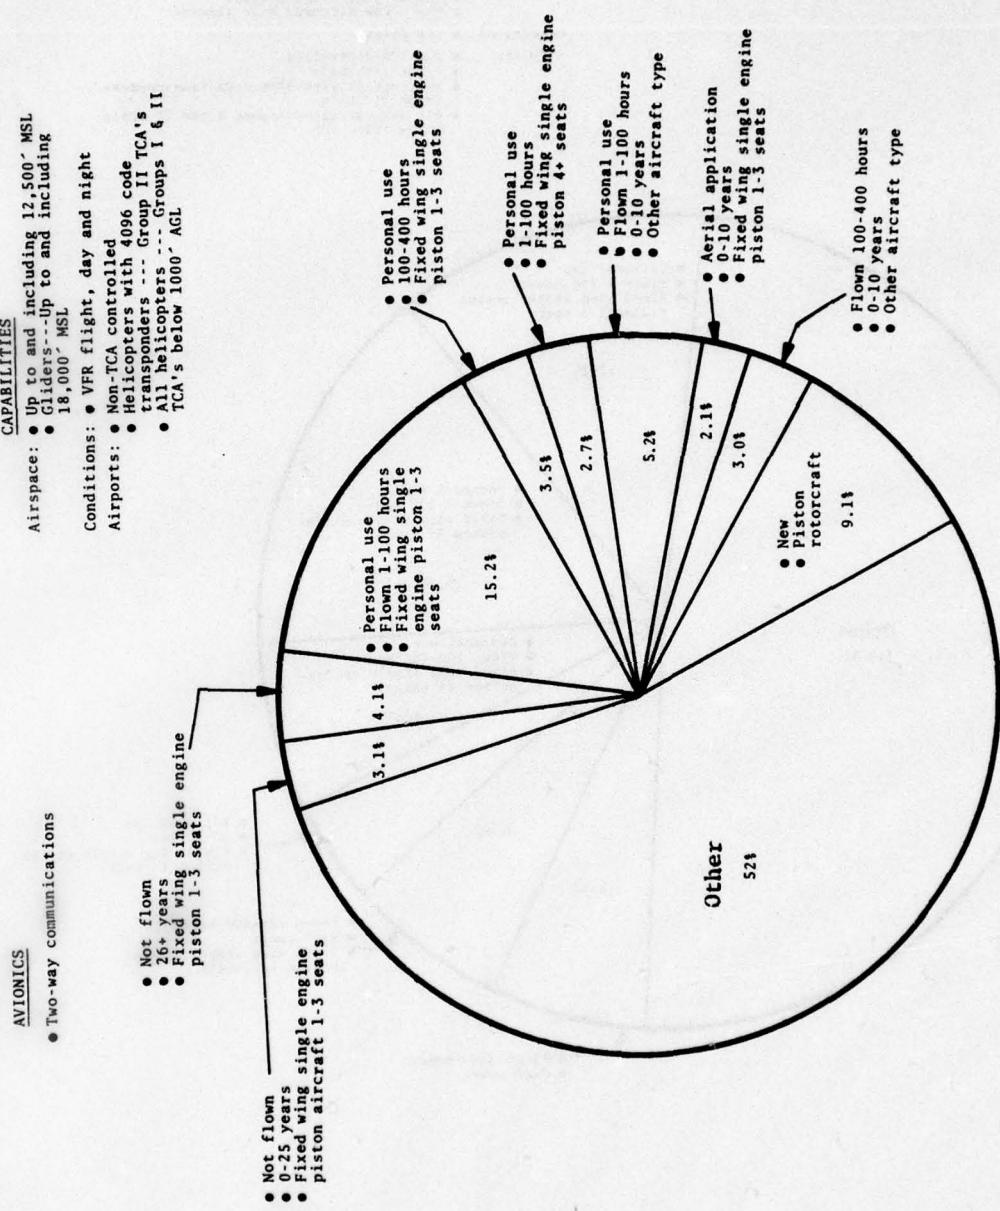


FIGURE 2. HIERARCHICAL CAPABILITY GROUP 2 (4 Percent)

AVIONICS

- Two-way communications
- VOR or ADF or RNAV

CAPABILITIES

Airspace:

- Up to and including 12,500' MSL
- Gliders---Up to and including 18,000' MSL
- ADF---Colored airways
- VOR or RNAV---VOR airways
- RNAV---Low altitude RNAV airways

Conditions:

Airports:

- IFR flight
- Non-TCA controlled
- Group III TCA's
- Helicopters with 4096 code transponders---
- Group II TCA's
- All Helicopters---Groups I and II TCA's below 1000' AGL

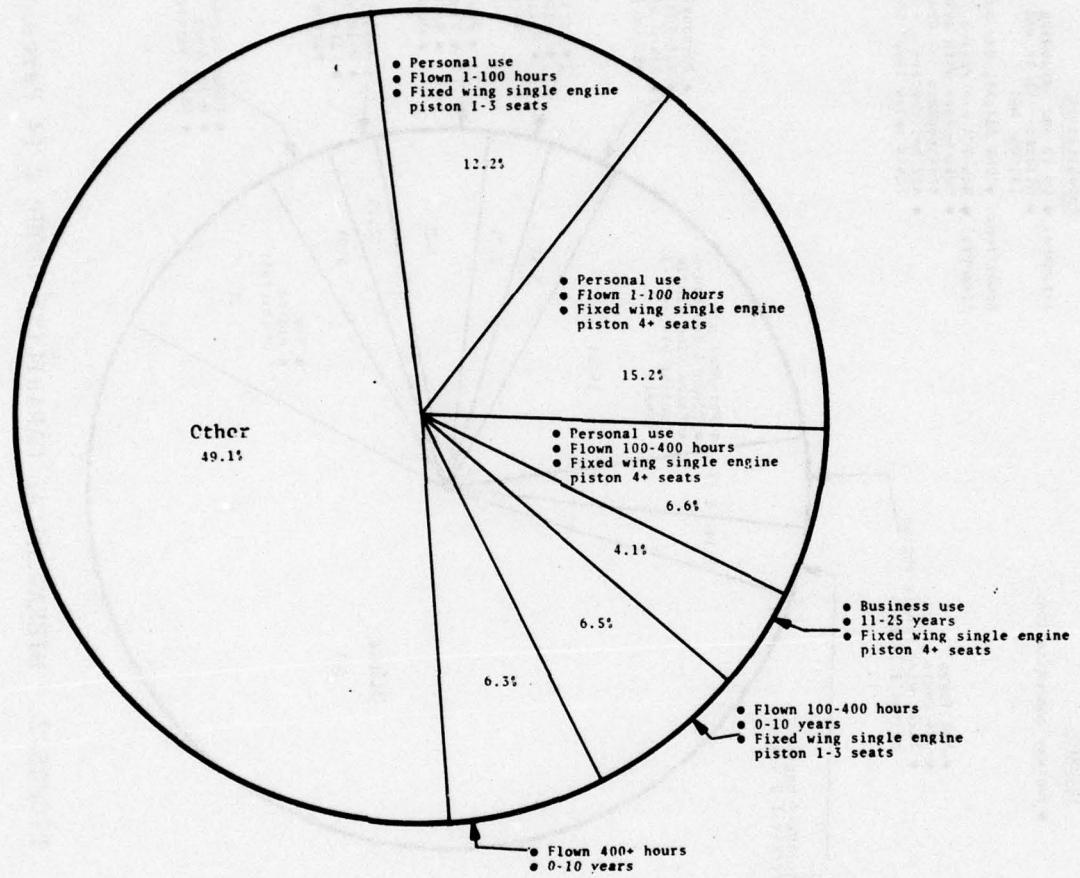


FIGURE 3. HERARCHICAL CAPABILITY GROUP 3 (41 Percent)

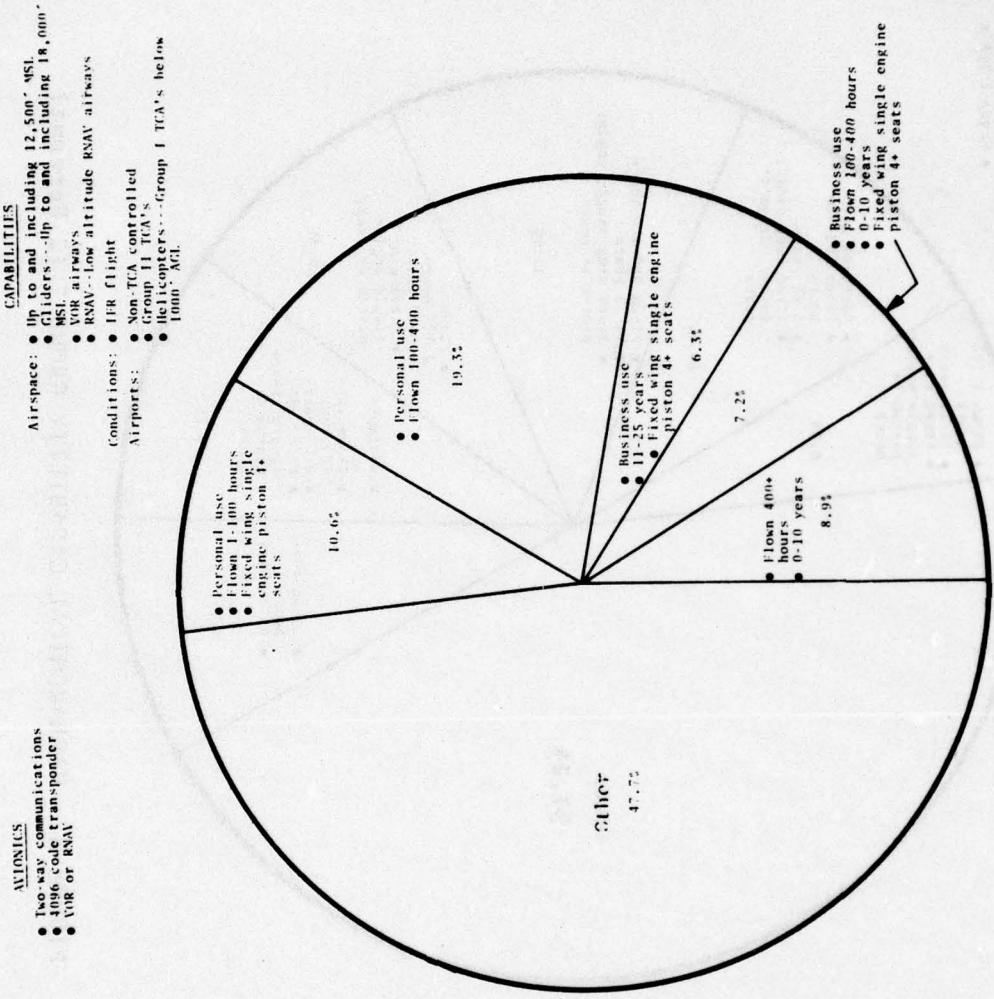


FIGURE 4. HIERARCHICAL CAPABILITY GROUP 4 (30 Percent)

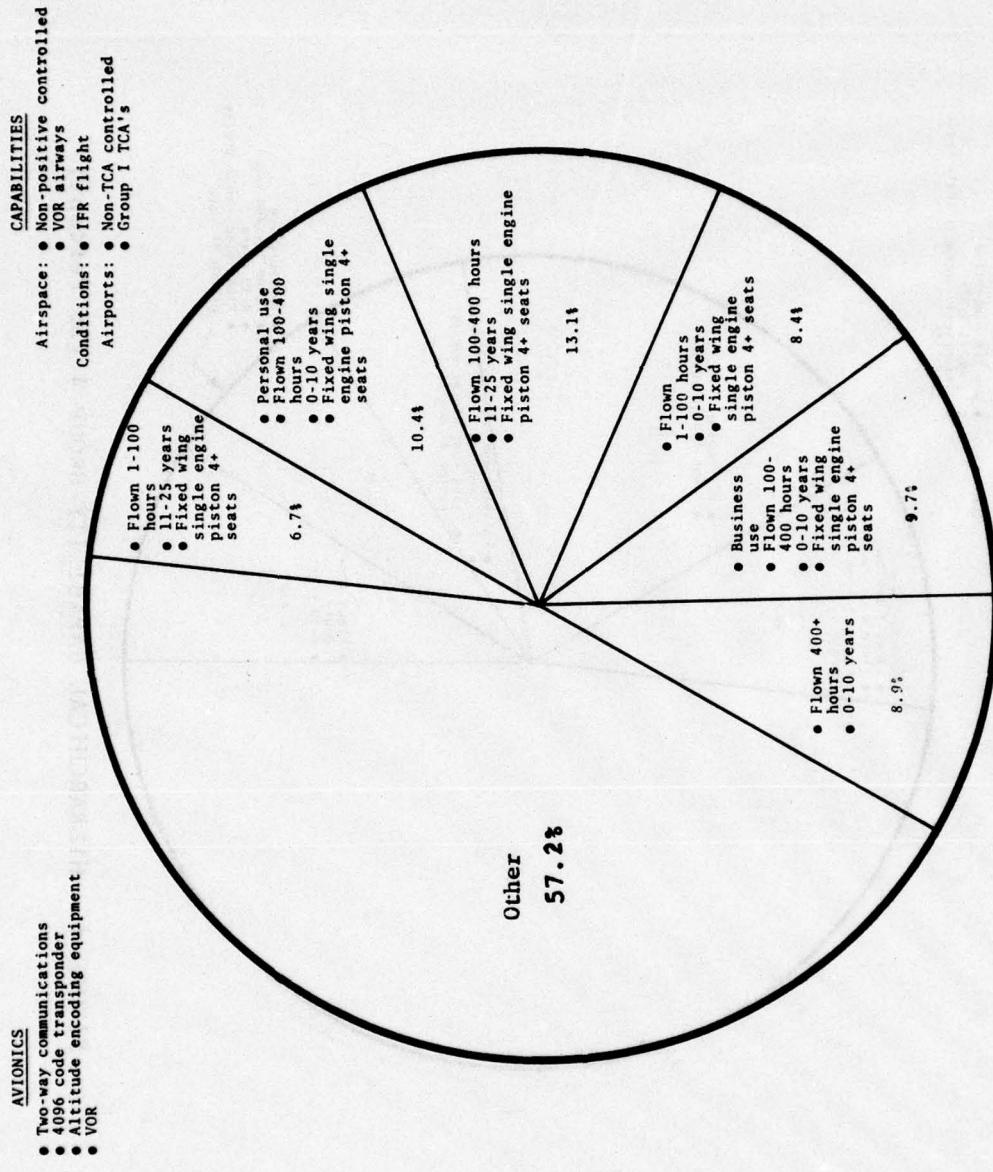


FIGURE 5. HIERARCHICAL CAPABILITY GROUP 7 (2 Percent)

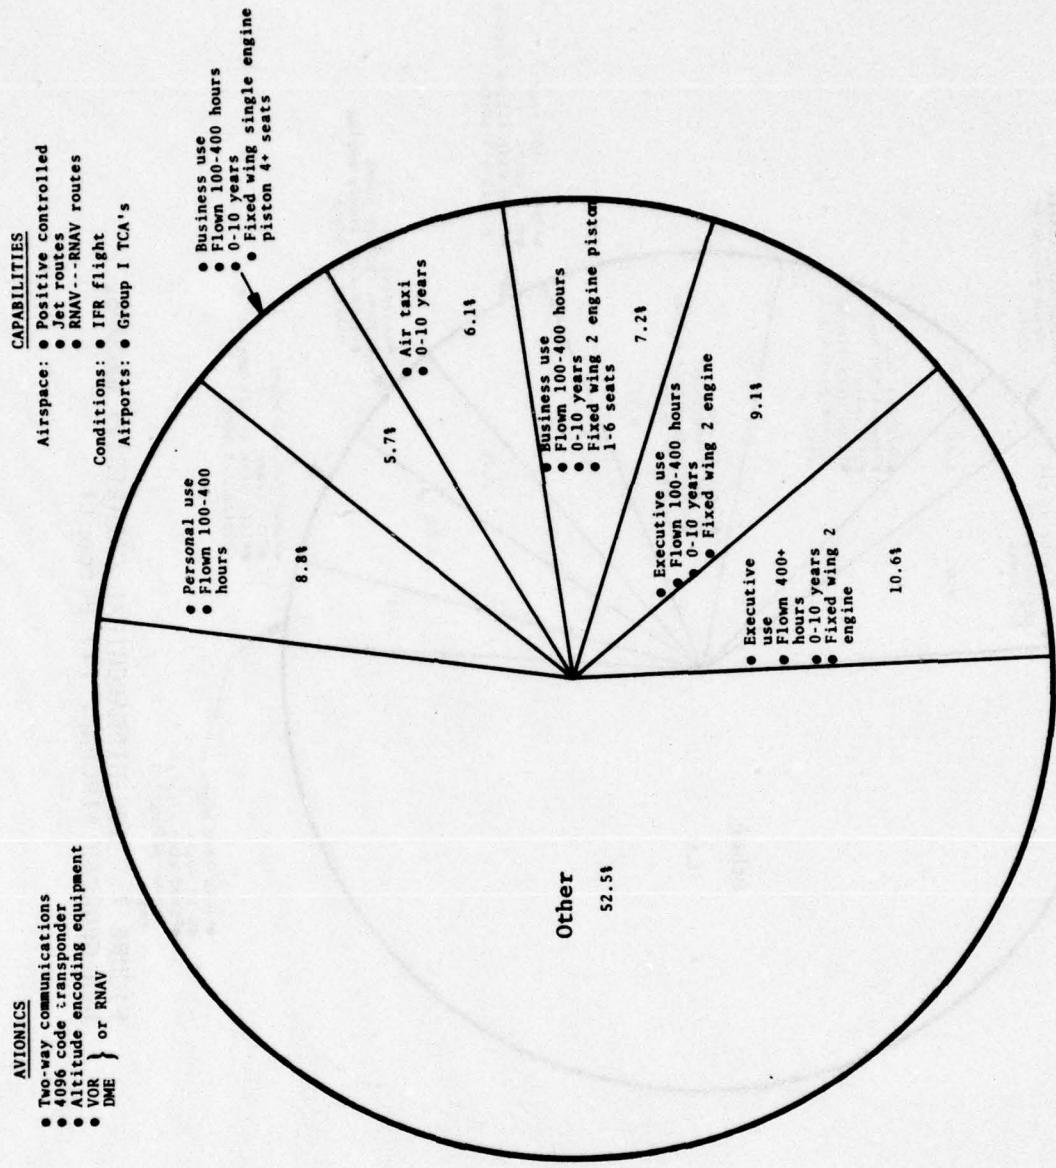
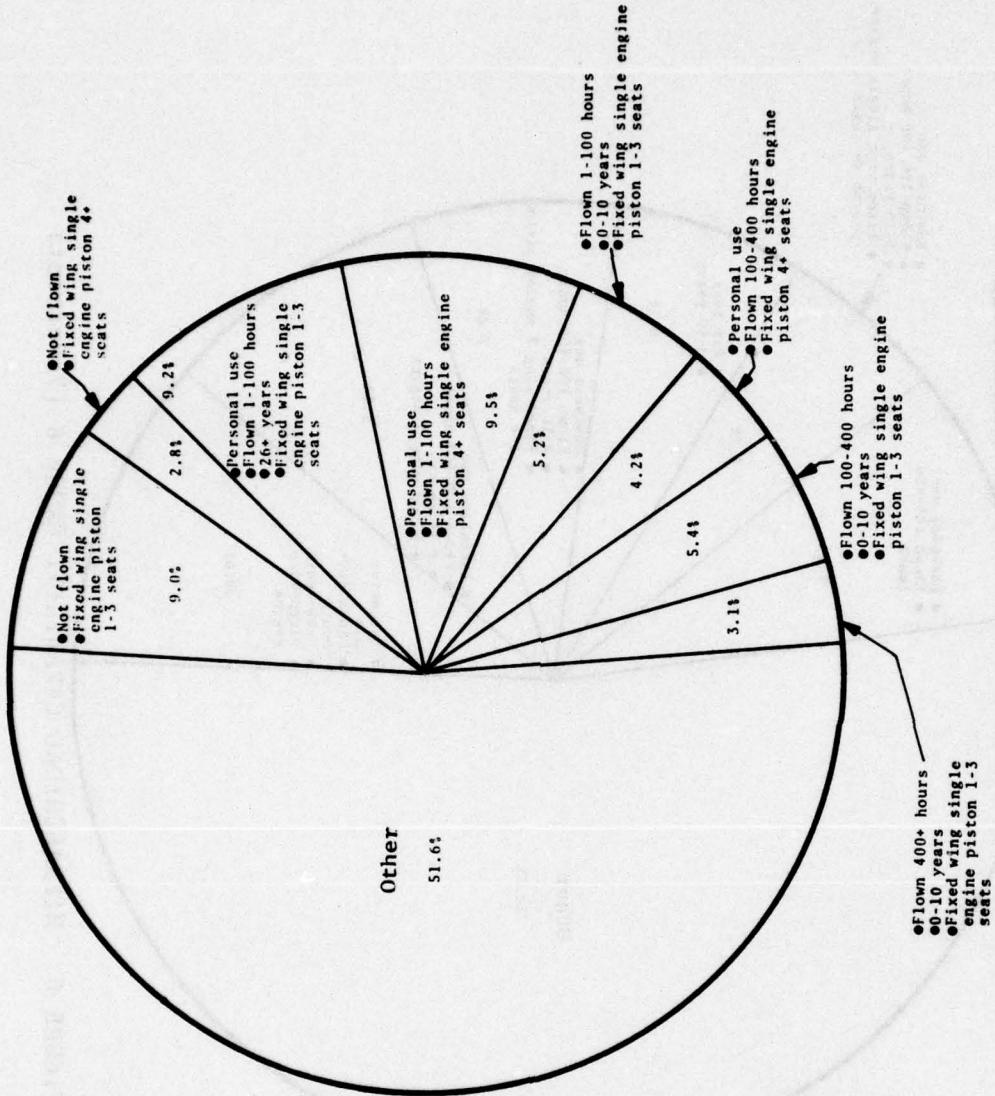


FIGURE 6. HIERARCHICAL CAPABILITY GROUP 8 (7 Percent)



**FIGURE 7. NON-HIERARCHICAL CAPABILITY GROUPS,
NON-GROUPED AIRCRAFT (47 Percent)**

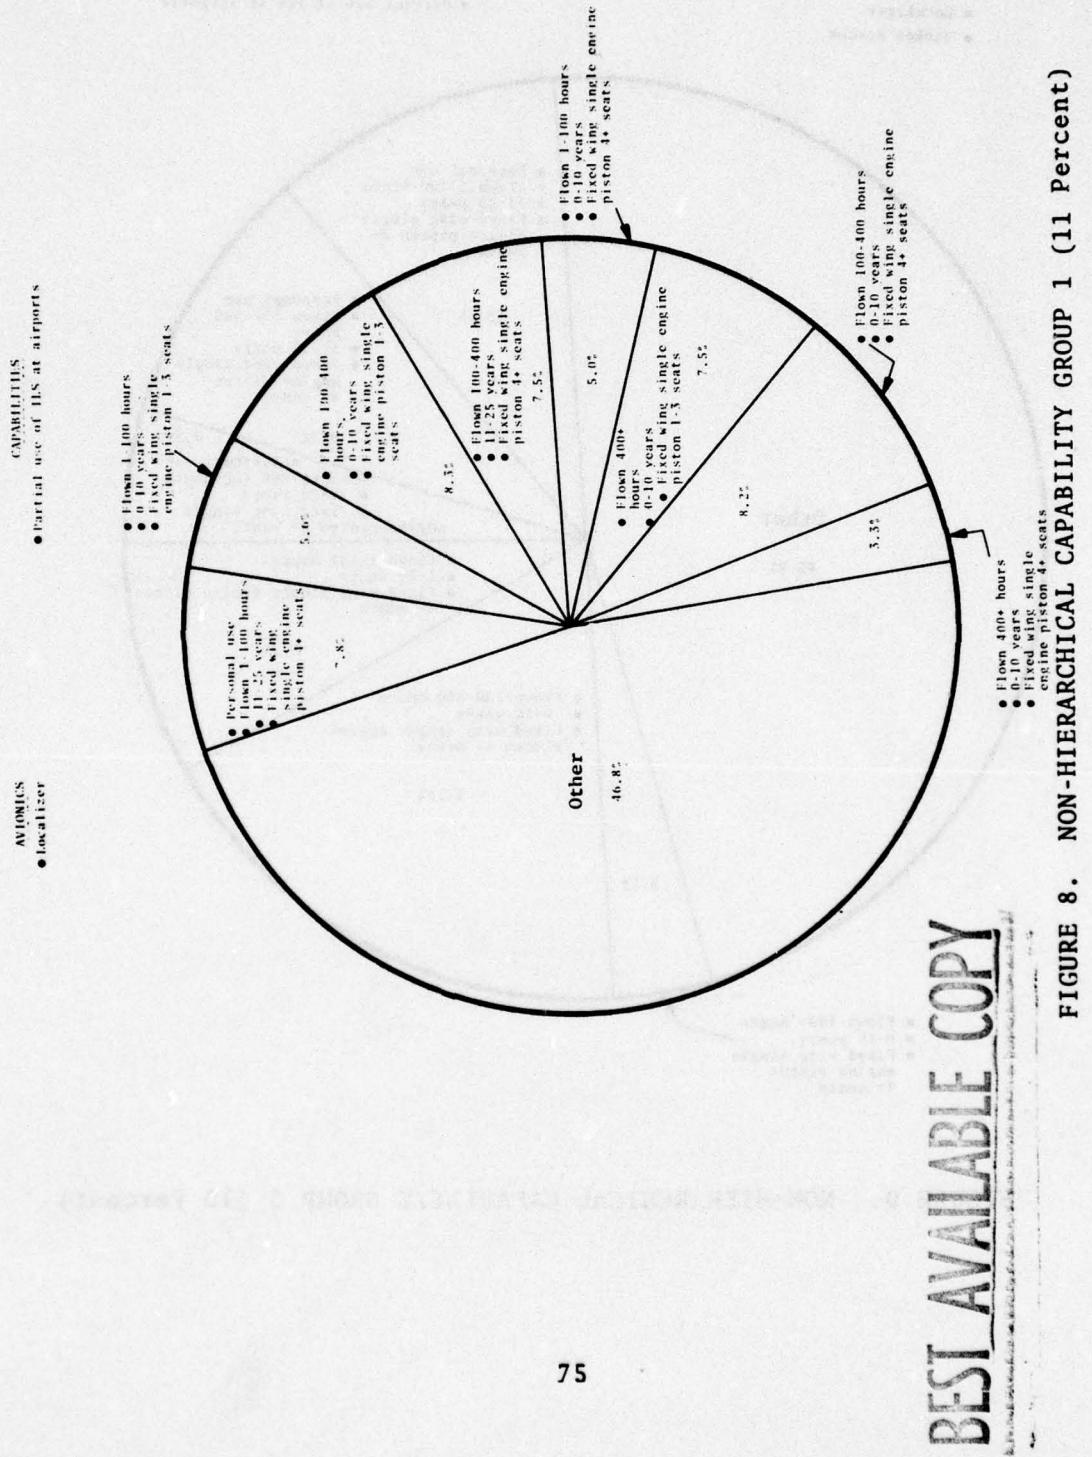


FIGURE 8. NON-HIERARCHICAL CAPABILITY GROUP 1 (11 Percent)

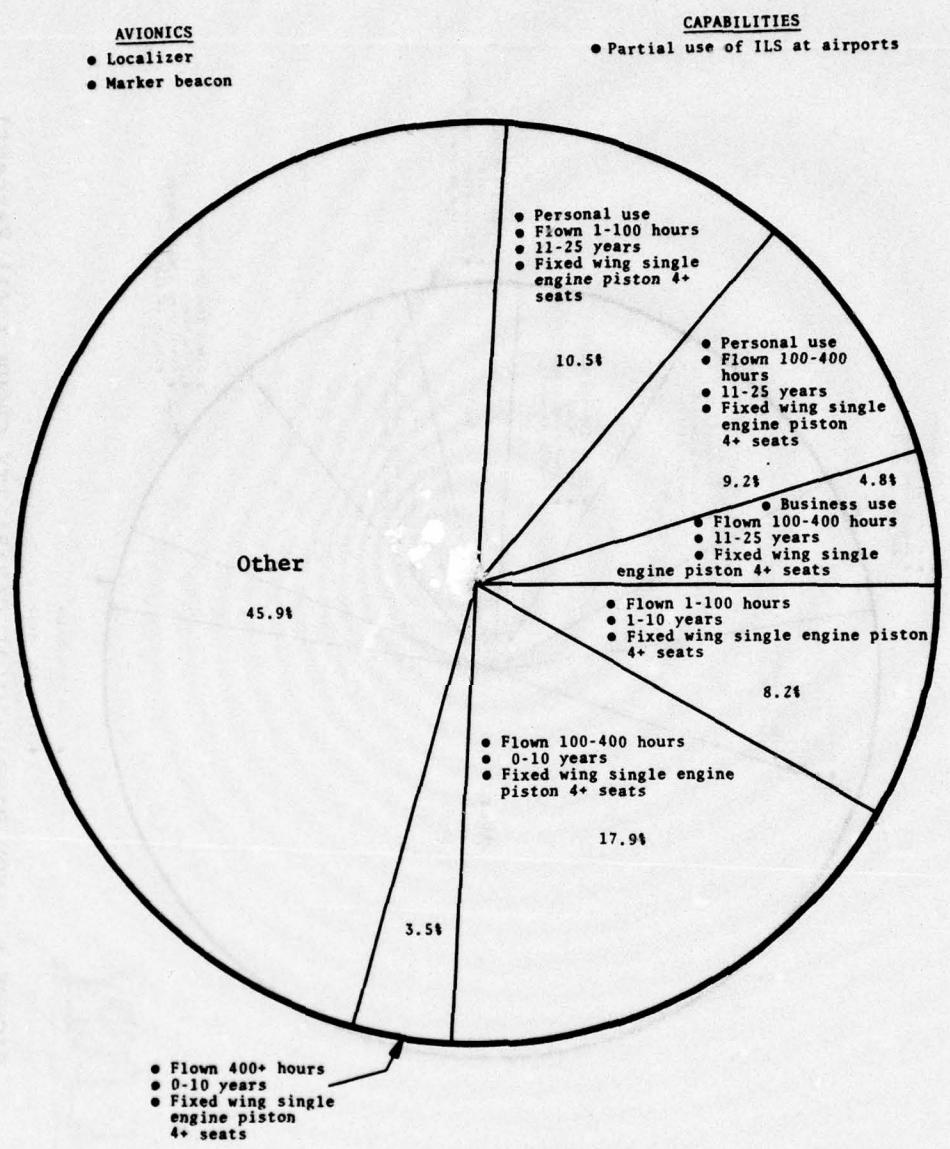


FIGURE 9. NON-HIERARCHICAL CAPABILITY GROUP 3 (13 Percent)

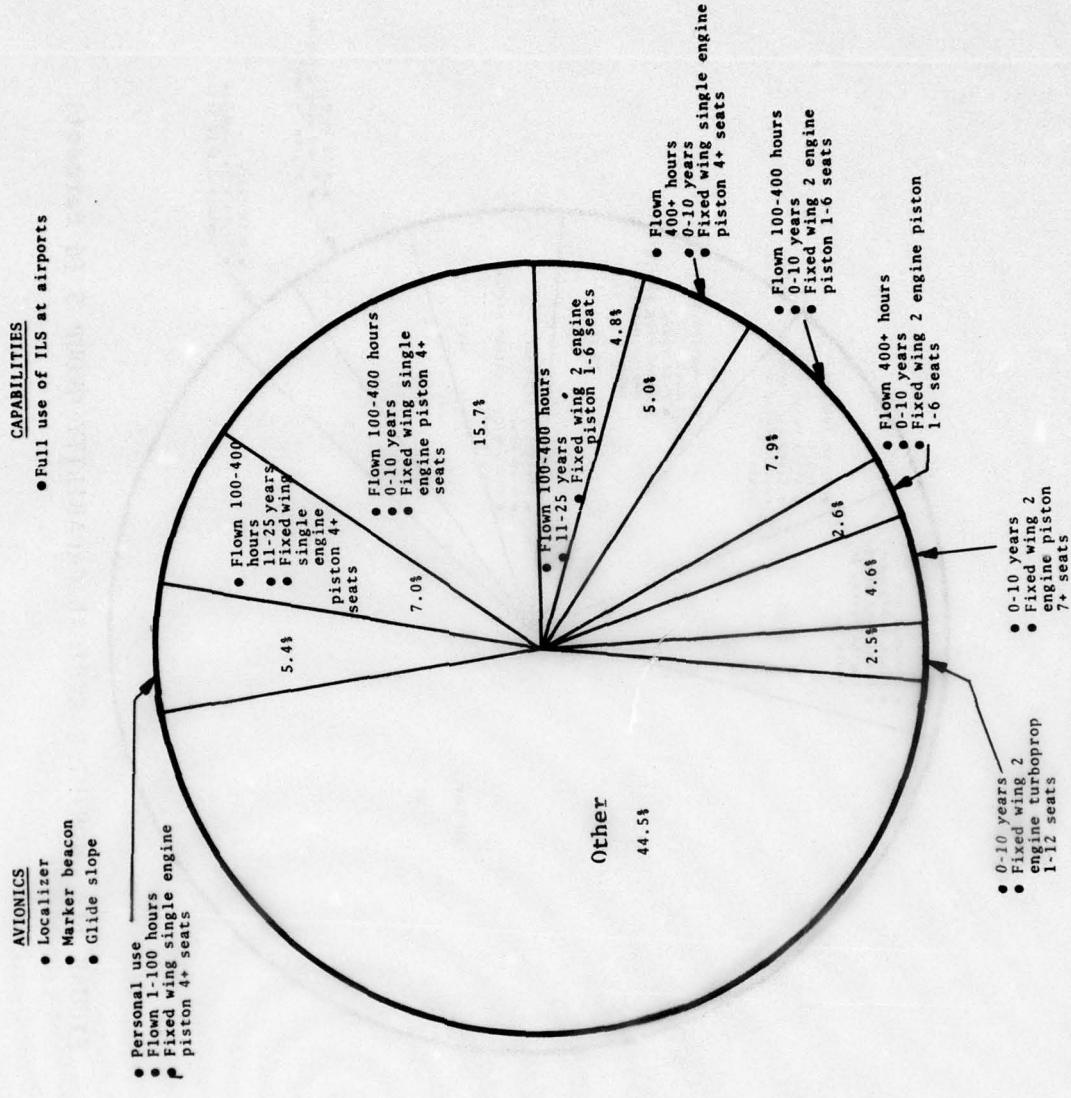


FIGURE 10. NON-HIERARCHICAL CAPABILITY GROUP 4 (26 Percent)

CAPABILITIES

AVIONICS

- Area navigation system
- Area navigation capability

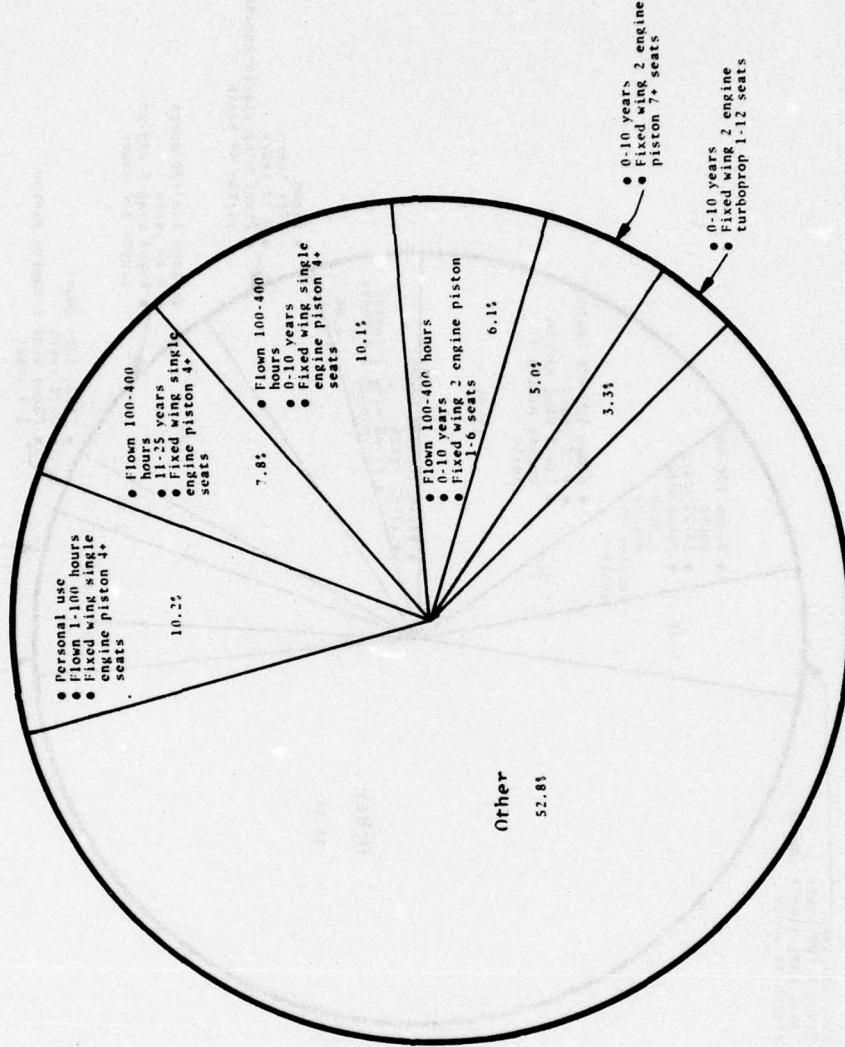


FIGURE 11. NON-HIERARCHICAL CAPABILITY GROUP 5 (6 Percent)

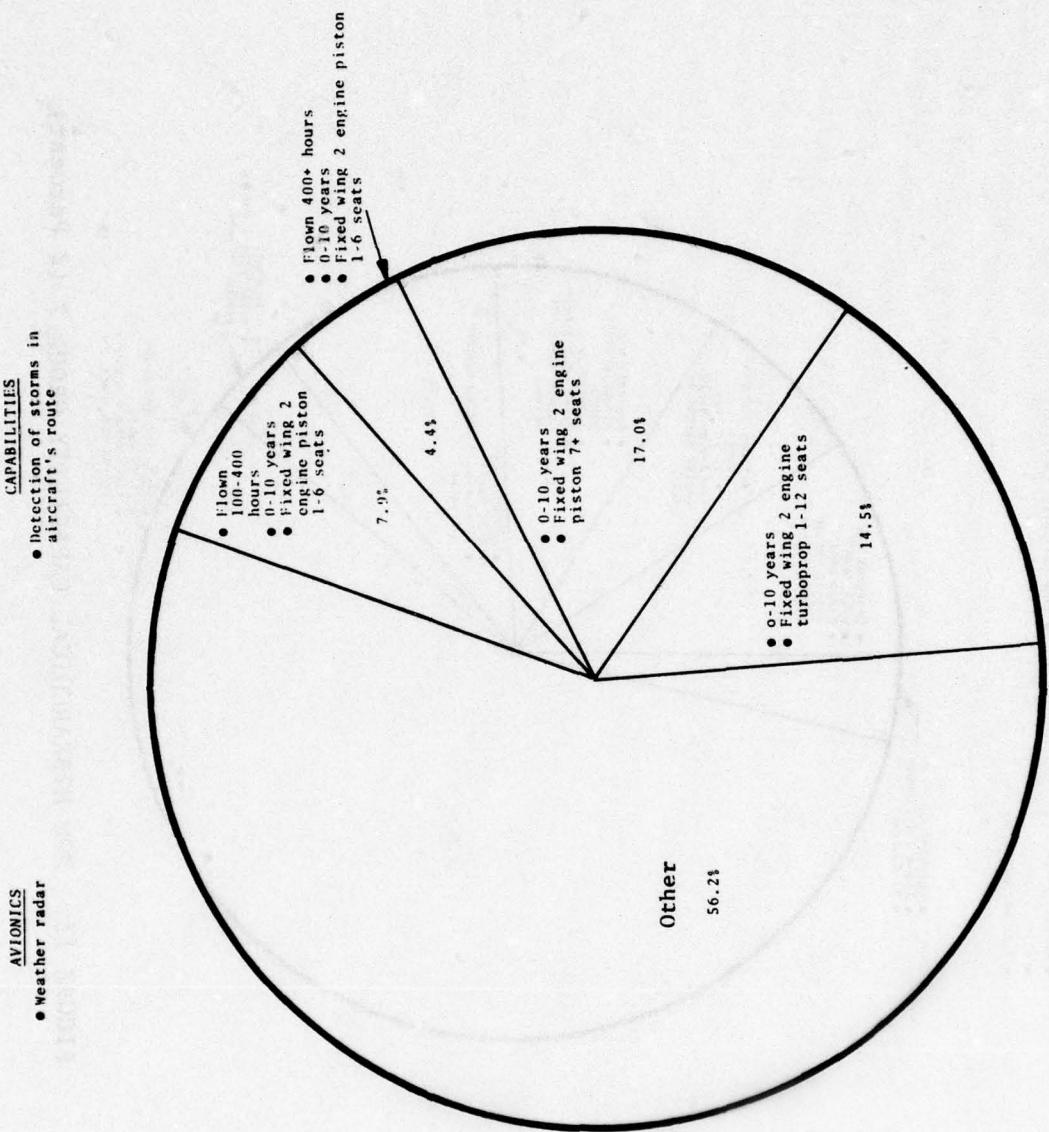


FIGURE 12. NON-HIERARCHICAL CAPABILITY GROUP 6 (5 Percent)

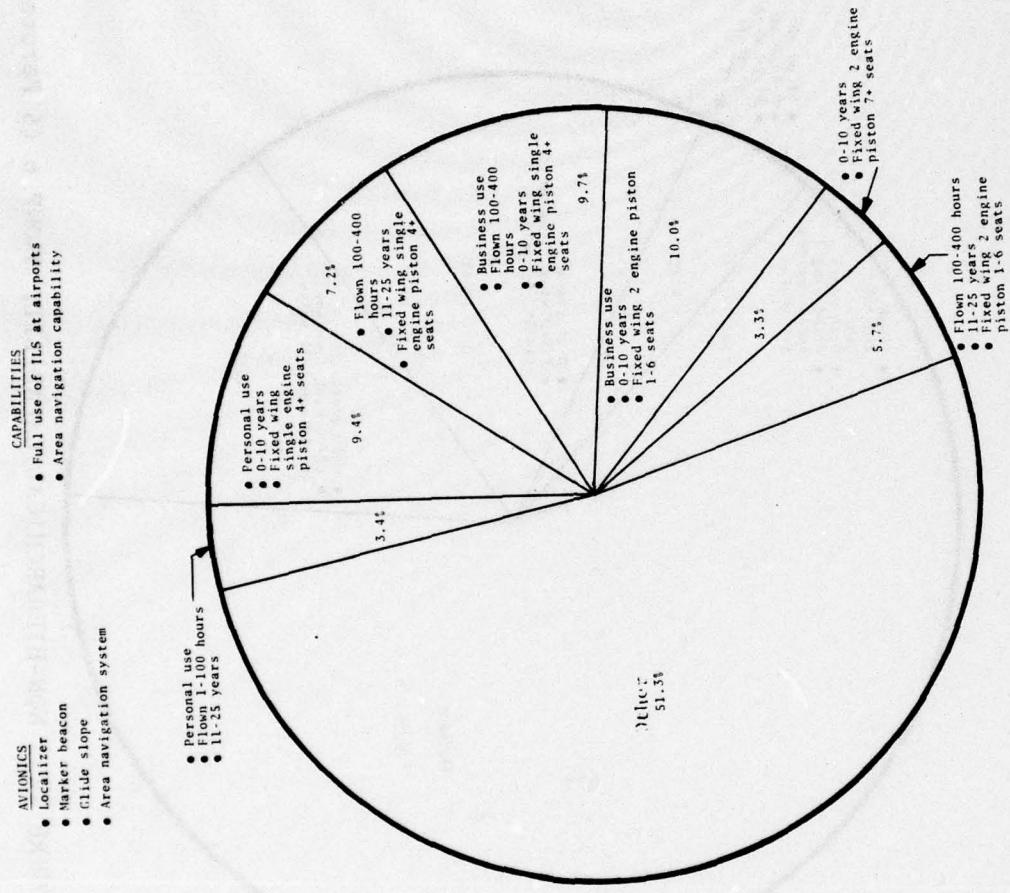


FIGURE 13. NON-HIERARCHICAL CAPABILITY GROUP 7 (2 Percent)

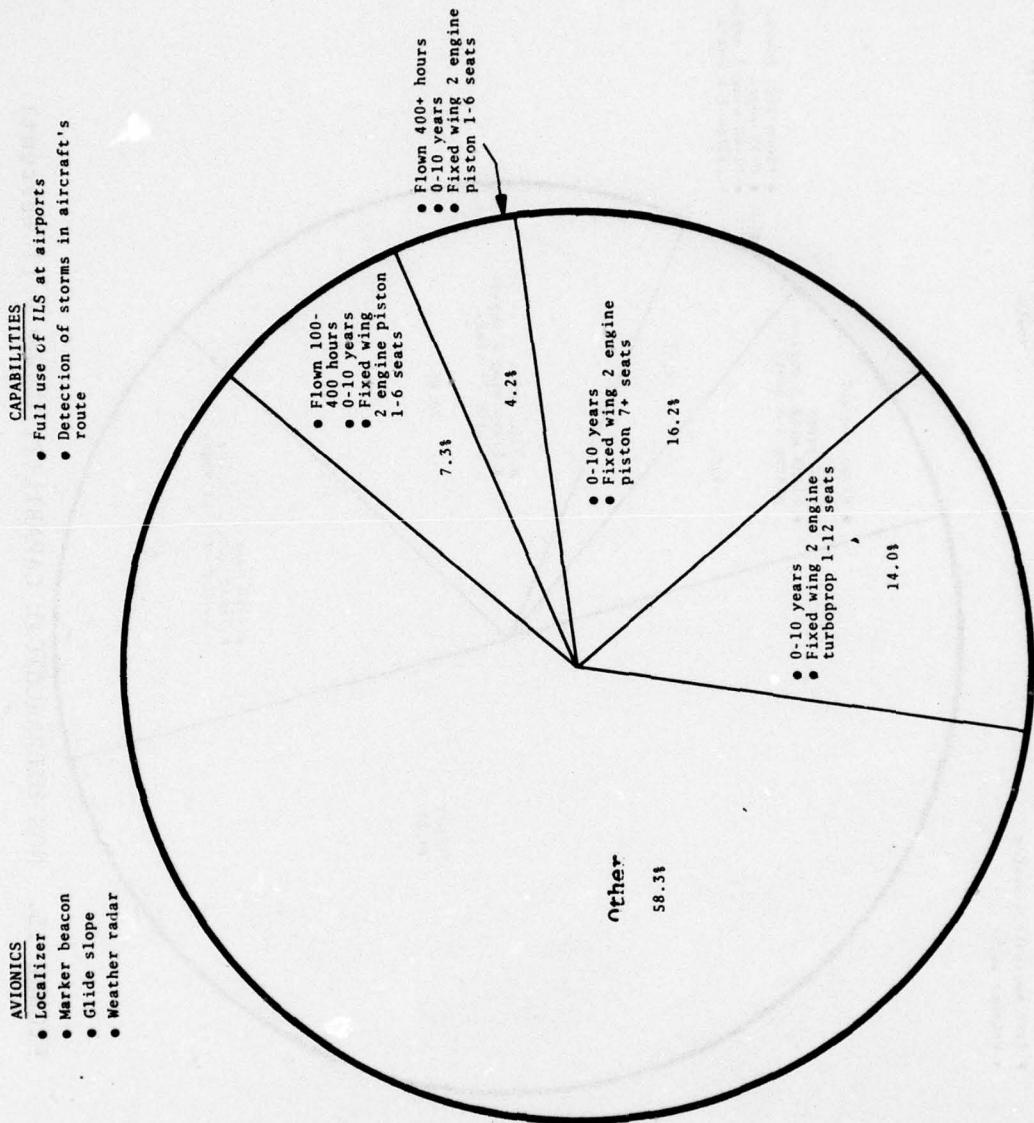


FIGURE 14. NON-HIERARCHICAL CAPABILITY GROUP 8 (3 Percent)

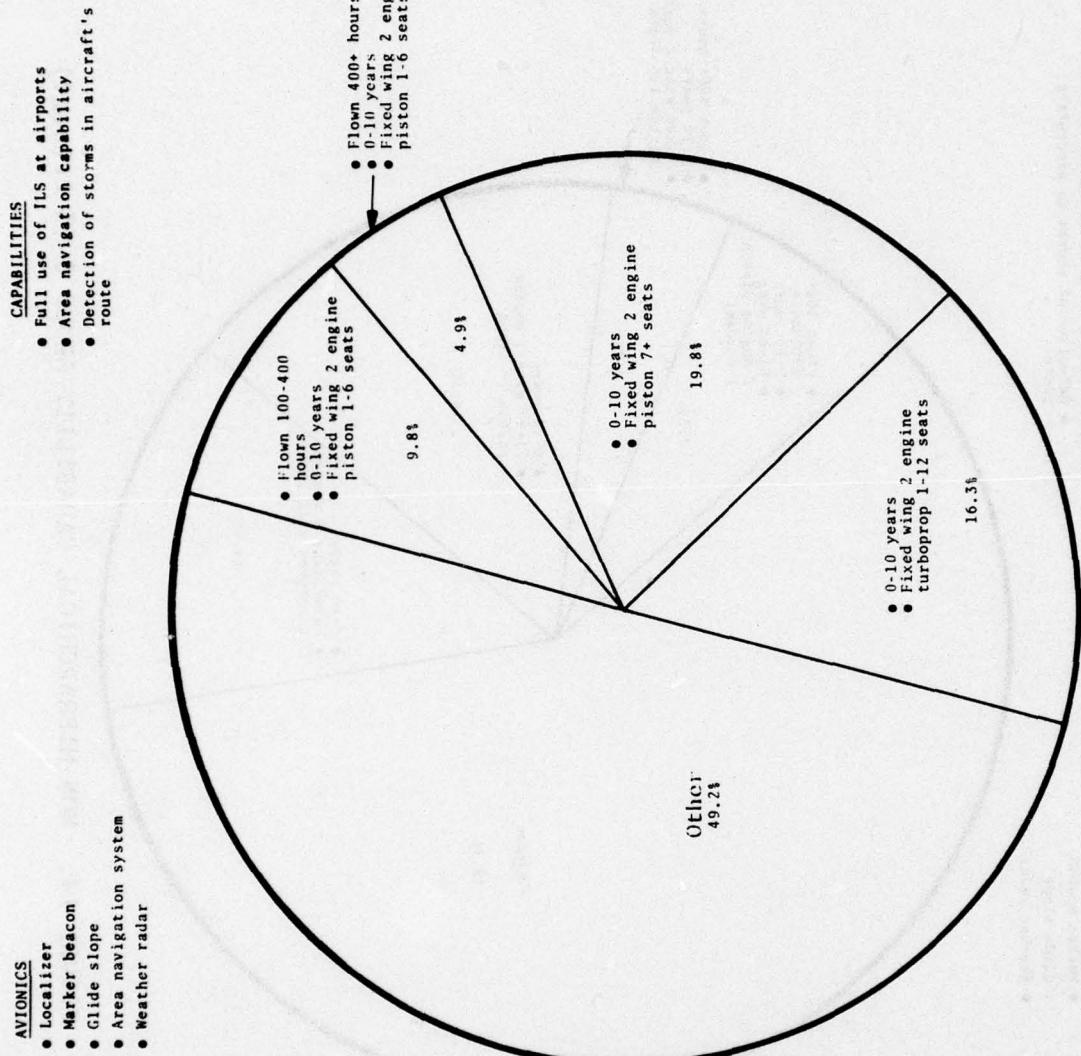


FIGURE 15. NON-HIERARCHICAL CAPABILITY GROUP 9 (1 Percent)

APPENDIX A
AIRCRAFT REGISTRATION ELIGIBILITY,
IDENTIFICATION, AND ACTIVITY REPORT

Please read the instructions at the beginning of each part and on the reverse side before completing this form.	DEPARTMENT OF TRANSPORTATION - FEDERAL AVIATION ADMINISTRATION		FORM APPROVED OMB NO. 04-R0185
AS OF DECEMBER 31, 1973			
FAR 47.44 requires each holder of a U.S. Civil Aircraft Certificate to submit this part of the form by April 1, 1974			
PART 1 - REGISTRATION INFORMATION			
Correct any pre-printed date here. →	① REG. NO.	② AIRCRAFT SERIAL NUMBER	③ AIRCRAFT MANUFACTURER, MODEL, AND SERIES
N	④	⑤	⑥
⑦ NAME AND ADDRESS OF CERTIFICATE HOLDER(S).			⑧ CORRECTED ADDRESS (if needed)
⑨ CITY			⑩ STATE ZIP
⑪ CANCELLATION OF REGISTRATION REQUESTED.			
17a. <input type="checkbox"/> SOLD (Show purchaser's name and address in remarks.)		17c. <input type="checkbox"/> STOLEN/LOST	
17b. <input type="checkbox"/> DESTROYED/SCRAPPED		17d. <input type="checkbox"/> EXPORTED	
17e. <input type="checkbox"/> OTHER		17f. REMARKS: (Type or print.)	
⑫ SIGN ONLY ONE See instructions on reverse of form.			
⑬ SIGNATURE X ⑭ TITLE			⑮ SIGNATURE X ⑯ TITLE
I (WE) REQUEST CANCELLATION OF REGISTRATION FOR THE ABOVE REASON.			
FAR 81.53 requests each owner to submit the information indicated below. For air carrier aircraft (operating under FAR 121 or 127) check here <input type="checkbox"/> and fill in Block 32.			
PART 2 - ACTIVITY & RELATED INFORMATION			
⑰ BASE AIRPORT OF AIRCRAFT (Correct below if changed.)	⑱ NOT BASED AT ANY AIRPORT	⑲ ENGINE MFGR. & MODEL GROUP	⑳
⑳ AIRPORT NAME		㉑	
㉒ CITY	㉓ ZIP	㉔ Correct here. (FAA FORM 8130-6, APPLICATION FOR AIRWORTHINESS, MUST BE ON FILE TO EFFECT CHANGE.)	
㉕ COUNTY	㉖ STATE	㉗	
AVIONICS EQUIPMENT CAPABILITY (Check all boxes that reflect the aircraft's current capability.)			
VHF COMMUNICATIONS EQUIPMENT			
① VHF Receiver Capability			
② Tuner			
③ 100 channels or less			
④ 101 channels or more			
⑤ No VHF Receiver Capability			
⑥ VHF Transmitter Capability			
⑦ 20 channels or less			
⑧ 21 thru 100 channels			
⑨ 101 or more channels			
⑩ No VHF Transmitter Capability			
ILS RECEIPTION CAPABILITY			
⑪ Localizer			
⑫ Glide slope			
⑬ Marker beacon			
⑭ No ILS Reception Capability			
TRANSPONDER EQUIPMENT			
⑮ 64 code			
⑯ 4096 code			
⑰ Altitude reporting			
⑱ No Transponder Equipment			
NAVIGATION EQUIPMENT			
⑲ VOR Receiver			
⑳ One			
㉑ More than one			
㉒ Distance Measuring Equipment (DME)			
㉓ Automatic Direction Finder (ADF)			
㉔ Weather Radar			
㉕ Approved Area Navigation Equipment			
㉖ Advisory Circular 90-45			
㉗ No Navigation Equipment			
HOURS FLOWN BY THIS AIRCRAFT JAN. 1 - DEC. 31, 1973 (Report whole hours (not fractions) while you owned this aircraft.)			
EXECUTIVE (Corporate flying by professional pilots)			
㉘ Hrs.			
BUSINESS (Individual flying for business reasons)			
㉙ Hrs.			
PERSONAL (Individual flying for personal reasons)			
㉚ Hrs.			
AERIAL APPLICATION (Agriculture, health, forestry)			
㉛ Hrs.			
INSTRUCTION (Excludes proficiency)			
㉜ Hrs.			
AIR TAXI (Part 135 operations including charter services)			
㉝ Hrs.			
INDUSTRIAL/SPECIAL (Patrol, survey, photo, hoist, etc.)			
㉞ Hrs.			
AIRCRAFT RENTAL BUSINESS			
㉟ Hrs.			
OTHER (R&D, demonstration, sport parachuting, etc.)			
㉟ Hrs.			
IF YOU OWNED THIS AIRCRAFT LESS THAN 12 MONTHS LAST YEAR, SHOW PREVIOUS OWNER'S HOURS BETWEEN JANUARY 1 - DECEMBER 31 HERE →			
IF AIRCRAFT NOT FLOWN LAST YEAR, CHECK HERE → <input type="checkbox"/>			

AC FORM 8050-73 (6-73) SUPERSDES PREVIOUS EDITION (0052-84-3600)

After completion & signature mail the original copy to: Department of Transportation, FAA Aircraft Registry, AAC-250, P.O. Box 26045, Oklahoma City, Okla. 73126

APPENDIX A. CONTINUED

NOTE: Entries made on the original will appear on the second copy without using carbon paper. The second copy of this form is for the aircraft owner. Shaded areas are for FAA use only.

INSTRUCTIONS FOR COMPLETING AND SIGNING THE FORM ON THE REVERSE.

For your convenience this form has been preprinted with all available information in FAA records as of December 31, 1973. Where the preprinted information is correct, no entry is needed. Where the information is incorrect or out-of-date insert the correct information in the space provided. Where no information is preprinted please enter the information requested in the space provided.

GUIDELINES FOR COMPLETING SIGNATURE BLOCKS 17 AND 18.

1. If this aircraft is still eligible for registration, and you wish to continue its registration, sign Block 18 and enter the date in Block 20. Follow the guidelines for signature below.
2. If the aircraft is now ineligible for registration in your name or you wish to cancel its registration for other reasons, complete and sign Block 17 and enter the date in Block 20, following the guidelines for signature below.

GUIDELINES FOR SIGNATURE

1. INDIVIDUAL OWNER. An individual owner whose name appears in Block 12 must sign his name.
2. PARTNERSHIP. Any general partner may sign for the partnership but must show his title "partner."
3. CORPORATIONS. Any corporate officer or person holding a managerial position with the corporation may sign for the corporation. He must also indicate the title of his office below his signature.
4. CO-OWNER. Unless cancellation of registration is requested, any co-owner may sign certifying citizenship and ownership for all co-owners. If cancellation is requested, the signature of each co-owner must appear on this form or on an attached sheet.
5. GOVERNMENT. Any authorized person may sign showing his title.

After you complete and sign the form send the original (first copy) to:

DEPARTMENT OF TRANSPORTATION
FAA AIRCRAFT REGISTRY AAC-259
P.O. BOX 26045
OKLAHOMA CITY, OKLAHOMA 73126

THIS IS AN ANNUAL REPORTING FORM ONLY AND IS NOT TO BE SUBMITTED WITH OTHER AIRCRAFT REGISTRATION DOCUMENTS OR MONEY.

APPENDIX B. AIRCRAFT STATISTICAL MASTER FILE RECORD LAYOUT

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>	<u>Comments</u>																		
1. N-Number	A/N	1-5	5	Left adjusted.																		
2. Serial Number	A/N	6-20	15	Right adjusted.																		
3. Aircraft				<table border="0"> <tr> <td>1 - Glider</td> <td>{</td> <td>2 - Balloon</td> </tr> <tr> <td></td> <td></td> <td>3 - Blimp/Dirigible</td> </tr> <tr> <td></td> <td></td> <td>4 - Fixed Wing Single</td> </tr> <tr> <td></td> <td></td> <td>5 - Fixed Wing Multi Engine</td> </tr> <tr> <td></td> <td></td> <td>6 - Rotorcraft</td> </tr> </table>	1 - Glider	{	2 - Balloon			3 - Blimp/Dirigible			4 - Fixed Wing Single			5 - Fixed Wing Multi Engine			6 - Rotorcraft			
1 - Glider	{	2 - Balloon																				
		3 - Blimp/Dirigible																				
		4 - Fixed Wing Single																				
		5 - Fixed Wing Multi Engine																				
		6 - Rotorcraft																				
4. Engine				<table border="0"> <tr> <td>1 - Reciprocating</td> <td>{</td> <td>2 - Turbopropeller</td> </tr> <tr> <td></td> <td></td> <td>3 - Turboshaft</td> </tr> <tr> <td></td> <td></td> <td>4 - Turbojet</td> </tr> <tr> <td></td> <td></td> <td>5 - Turbine Air Generator</td> </tr> <tr> <td></td> <td></td> <td>6 - Ram Jet</td> </tr> <tr> <td></td> <td></td> <td>9 - Unknown</td> </tr> </table>	1 - Reciprocating	{	2 - Turbopropeller			3 - Turboshaft			4 - Turbojet			5 - Turbine Air Generator			6 - Ram Jet			9 - Unknown
1 - Reciprocating	{	2 - Turbopropeller																				
		3 - Turboshaft																				
		4 - Turbojet																				
		5 - Turbine Air Generator																				
		6 - Ram Jet																				
		9 - Unknown																				
5. Engine Horse Power (each)	N	35-39	5	Lbs. of thrust for turbo only.																		
6. Number of Engines	N	40-41	2																			
7. Number of Seats	N	42-44	3																			
8. Weight	N	45-51	7	Maximum gross takeoff																		
9. Cruise Speed	N	52-55	4	75% of average cruising speed X hours flown = miles flown																		
10. Wing Code	A/N	56	1	<table border="0"> <tr> <td>1 - Low Wing</td> <td>{</td> <td>2 - High Wing</td> </tr> <tr> <td></td> <td></td> <td>3 - Biwing</td> </tr> </table>	1 - Low Wing	{	2 - High Wing			3 - Biwing												
1 - Low Wing	{	2 - High Wing																				
		3 - Biwing																				

APPENDIX B. CONTINUED

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>	<u>Comments</u>
11. Aircraft Category Code	N	57	1	1 - Land 2 - Sea 3 - Amphibian
12. Amateur Certification Code	A/N	58	1	Blank - Not Amateur 1 - Amateur Certification
13. Fuel Consumed	N	59-64	6	Fuel consumed per engine. Gallons of fuel consumed per hour, recorded in 2 decimal positions, decimal assumed.
14. Airworthiness Class	N	65	1	1 - Standard 2 - Limited 3 - Restricted 4 - Experimental 5 - Provisional 6 - Multiple 8 - Special Flight Permit
15. Approved Operations Code	A/N	66	1	See Enclosure 1
16. Year Manufactured	N	67-68	2	00 if Unknown

APPENDIX B. CONTINUED

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>	<u>Comments</u>
17. G/A Indicator	A/N	69	1	1 - Air Carrier Aircraft Type Unknown X - Air Carrier Aircraft Type Passenger Y - Air Carrier Aircraft Type Passenger/Cargo Z - Air Carrier Aircraft Type Cargo 2 - General Aviation Aircraft D - Dealer Aircraft 3 - General Aviation Aircraft continuous maintenance
18. Type of Registrant	A/N	70	1	1 - Individual 2 - Partnership 3 - Corporation 4 - Coownership 5 - Government
19. Base Airport ID	A/N	71-75	5	
20. Base Airport				Region State GAD0 County Site
				A/N N A N A/N
				76 77-78 79-81 82-84 85-93
				1 2 3 3 9

APPENDIX B. CONTINUED

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>	<u>Comments</u>
21. Owner				
	Zip	94-98	5	
	Region	99	1	
	State	100-101	2	
	GA Distr. Office	102-104	3	
	County	105-107	3	
22. Operator				
88	Zip	108-112	5	
	Region	113	1	
	State	114-115	2	
	GADO	116-118	3	
	County	119-121	3	
23. Hours Flown by Use				Distribution of previous owner's hours included in other 9 use categories
	Executive	122-125	4	
	Business	126-129	4	
	Personal	130-133	4	
	Aerial Application	134-137	4	
	Instructional	138-141	4	
	Air Taxi	142-145	4	
	Industrial/Special	146-149	4	
	Rental	150-153	4	
	Other	154-157	4	
	Previous Owner	158-161	4	
24. Not Flown		162	1	1 - Inactive blank - Active
				A

APPENDIX B. CONTINUED

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>	<u>Comments</u>
25. Primary Use	N	163	1	0 - Unknown or Not Reported 1 - Executive 2 - Business 3 - Personal 4 - Aerial Application 5 - Instruction 6 - Air Taxi 7 - Industrial/Special 8 - Aircraft Rental Business 9 - Other
26. Communication Equipment				
	VHF Tuner	164	1	Blank - Not Reported, 1 - Yes, 0-None
89	VHF Receiver	165	1	Blank - Not Reported, 0-None 1 - 180 channels or less 2 - 181 channels or more
	VHF Transmitter	165	1	Blank - Not Reported 1 - 20 channels or less 2 - 21 through 180 channels 3 - 181 channels or more 0 - none
27. ILS				
	Localizer	167	1	Blank - Not Reported, 1 - Yes, 0-None
	Glide Slope	168	1	Blank - Not Reported, 1 - Yes, 0-None
	Marker Beacon	169	1	Blank - Not Reported, 1 - Yes, 0-None


APPENDIX B. CONTINUED

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>
28. Transponder			
64 or 4096 code	N	170	1
Altitude Reporting	N	171	1
29. Navigational Equipment			
VOR	N	172	1
DME	N	173	1
90 ADF	N	174	1
Weather Radar	N	175	1
Area Navigation	N	176	1
30. Certification Issue Date			
Month	N	177-178	2
Day	N	179-180	2
Year	N	181-182	2
31. Date Entered System			
Month	N	183-184	2
Day	N	185-186	2
Year	N	187-188	2
32. Statistical Year			
	N	189-190	2

APPENDIX B. CONCLUDED

<u>Data Element</u>	<u>Field Description</u>	<u>Position</u>	<u>Length</u>	<u>Comments</u>
33. Imputed Hours	A/N	191	1	1 - Yes (Imputed) Ø - No (Reported)
34. Imputed Airport	A/N	192	1	1 - Yes (Imputed) Ø - No (Reported)
35. Type Aircraft Sort	A/N	193-195	3	Enclosure 2
36. Aircraft Manufacturer Name	A/N	196-225	30	
37. Aircraft Model & Series Name	A/N	226-245	20	
38. Engine Manufacturer Name	A/N	246-255	10	
39. Engine Model Name	A/N	256-268	13	
40. Airport State Name	A	269-283	15	
41. Airport County Name	A	284-305	22	
42. Airport Name	A	306-335	30	
43. Blank	A	336	1	
44. Random Number	A/N	337-342	6	
45. Engine Sort Code	N	343	1	
46. Total Recalcitrant	N	344	1	
47. Blank	A	345-354	10	

APPENDIX C. AIRSPACE STRUCTURE

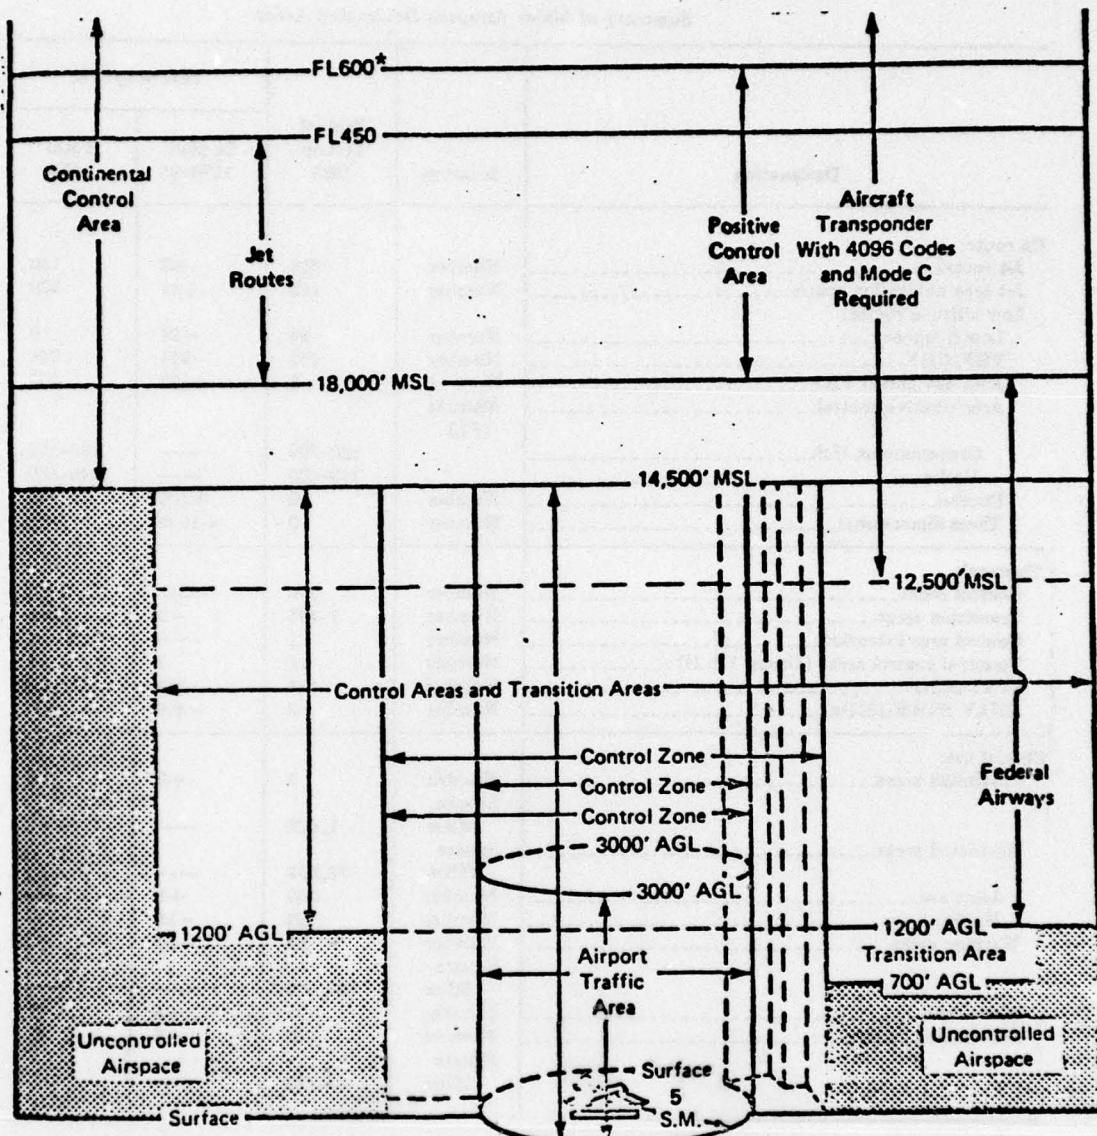

General Dimensions of Control Zones, Airport Traffic Areas, and the Vertical Extent of Airspace Segments

* FL600 means "Flight Level 60,000 feet MSL"

Airman's Information Manual, Basic Flight Manual and ATC Procedures,
Part 1, (May, 1976), p. 1-23.

APPENDIX C. CONTINUED

Summary of Major Airspace Designated Areas

Designation	Measure	Present system 1975	Future system	
			In plan 1976-85	Total 1985
En route:				
Jet routes.....	Number	216	-66	150
Jet area navigation routes.....	Number	163	+47	200
Low altitude routes:				
Low frequency.....	Number	24	-24	0
VHF/UHF.....	Number	462	-214	248
Area navigation VHF.....	Number	8	+102	200
Area positive control.....	Altitude (FL)			
Conterminous U.S.....	180-600			180-600
Alaska.....	240-600			240-600
Parallel.....	Number	0	+500	500
Three dimensional.....	Number	0	+1000	1000
Terminal:				
Control zones.....	Number	806	+287	1093
Transition areas.....	Number	1,495	-9	1486
Control area extension.....	Number	1	—	1
Terminal control areas (Group I & II).....	Number	18	3	21
STARs/SIDs.....	Number	414	-239	175
RNAV STARs/SIDs.....	Number	2	+448	450
Special use:				
Prohibited areas.....	Number	7	+2	9
Square Miles.....	Square Miles	1,626	—	—
Restricted areas.....	Number	77,639	—	—
Square Miles.....	Square Miles	163	+6	169
Joint use.....	Number	29	-18	11
Nonjoint use.....	Number	68	-33	35
Warning areas.....	Number	408,970	—	—
Alert areas.....	Number	35	-5	30
Square Miles.....	Square Miles	35	-5	30
Jet training areas.....	Number	87,183	—	—

**The National Aviation System Plan Fiscal Years 1976-1985,
(March, 1975), p. 6-3.**

APPENDIX C, CONTINUED

Airborne Equipment Requirements

Types of Airspace	Flight condition	Equipment Requirements	
		1975	1985
Uncontrolled.....	VFR (day)	1. Airspeed indicator 2. Altimeter 3. Compass 4. Tachometer 5. Oil temperature 6. Emergency locator transmitter ¹	7. Manifold pressure 8. Fuel gage 9. Landing gear 10. Belts 11. Special equipment for over water flights (FAR 91.33)
Uncontrolled.....	VFR (night)	All above plus: 1. Position lights 2. Anti-collision light	Same as 1975 3. Landing light (if for hire) 4. Electrical source
Uncontrolled.....	IFR	Same as VFR plus: 1. Two-way radio 2. Navigation system 3. Gyro turn/bank 4. Sensitive altimeter adjustable for barometric pressure 5. Clock with sweep second hand	Same as 1975 6. Artificial horizon 7. Directional gyro or equivalent 8. Generator
Controlled (non-positive).....	VFR	Same as uncontrolled VFR plus transponder ²	Same as 1975
	IFR	Same as uncontrolled IFR plus transponder ²	Same as 1975
Positive control.....	VFR	Requires prior ATC approval	Same as 1975
	IFR	Same as uncontrolled IFR plus: 1. DME (if VOR/TACAN equipment carried) 2. Transponder ² 3. VOR (In TCA's) 4. ADF (Air Carrier only) 5. ILS (Air Carrier only)	Same as 1975

¹ Does not apply to turbojet aircraft, scheduled air carriers (except charter), or certain training and agricultural flights.

² 4096 code, Mode 3A transponder with Mode C automatic altitude reporting capability will be required at Group I and II TCA Locations and in APC, and in controlled airspace of the 48 States above 12,500 feet. All non-participating aircraft operating within Group III TCA's will be transponder equipped with Mode C capability.

**The National Aviation System Plan Fiscal Years 1976-1985,
(March, 1975), p. 13-5.**

AD-A045 209

TRANSPORTATION SYSTEMS CENTER CAMBRIDGE MASS
GENERAL AVIATION AVIONICS STATISTICS: 1974. (U)
AUG 77 J C SCHWENK

UNCLASSIFIED

TSC-FAA-77-11

F/G 9/3

2 OF 2
AD
A045 209

FAA-MS-77-2

NL



END
DATE
FILMED
11-77
DDC

APPENDIX C, CONTINUED

National Terminal Radar Programs

Location	Terminal airspace designation	Equipment Requirements		Services provided
		Present	Under Consideration	
Top 9 Large Hub locations.	Group I TCA	(Effective Jan 1, 1975) 4096 Code Transponder and Mode C Automatic Altitude Reporting Ca- pability; Two-way Radio; VOR or TACAN Receiver.	Relaxation of Transponder Requirements During Periods of Low Activity.	TCA Procedures
Next 12 Large Hub locations	Group II TCA	(Effective July 1, 1975) 4096 Code Transponder and Mode C Automatic Altitude Reporting Ca- pability; Two-way Radio; VOR or TACAN Receiver.	Deletion of Altitude Encoding Requirement. (Has been Deleted)	TCA Procedures
Remaining 42 ARTS-III locations.	Group III TCA	(Effective July 1, 1975) 4096 Code Transponder and Mode C Automatic Altitude Reporting Ca- pability or Two-way Radio Communications.		TCA Procedures
All other radar facilities	TRSA where Stage III service is provided	-----	-----	Stage II or III service

The National Aviation System Plan Fiscal Years 1976-1985,
(March, 1975), p. 6-4.

APPENDIX C. CONCLUDED

**Designated Terminal Airspace (All ARTS-III Locations);
Terminal Control Areas**

GROUP I	Date designated or planned	GROUP II	Date designated or planned
1. Atlanta.....	June 1970	1. St. Louis	Jan. 1974
2. Chicago.....	Aug. 1970	2. Seattle	Jan. 1974
3. Washington National.....	Feb. 1971	3. Minneapolis	Feb. 1974
4. New York (LGA, JFK, EWR).....	Sept. 1971	4. Denver	Mar. 1974
5. Los Angeles.....	Sept. 1971	5. Houston	Mar. 1974
6. San Francisco.....	Dec. 1972	6. Cleveland	May 1974
7. Boston.....	Feb. 1973	7. Detroit	May 1974
8. Miami.....	Apr. 1973	8. Pittsburgh	May 1974
9. Dallas.....	Jan. 1974	9. Las Vegas	Nov. 1974
		10. Philadelphia	Mar. 1975
		11. Kansas City	Mar. 1975
		12. New Orleans	Jul. 1975


Group III Terminal Areas (42 locations)

Albany	El Paso	Omaha	San Diego
Albuquerque	Hartford	Orlando	San Juan
Baltimore	Honolulu	Portland, Oreg.	Santa Ana/Long Beach
Birmingham	Indianapolis	Phoenix	Shreveport
Buffalo	Jacksonville	Providence	Syracuse
Burbank	Louisville	Raleigh-Durham	Tampa
Charlotte	Memphis	Ontario, California	Tucson
Cincinnati	Milwaukee	Rochester, N.Y.	Tulsa
Columbus, Ohio	Nashville	Sacramento	Washington-Dulles
Dayton	Norfolk	Salt Lake City	
Des Moines	Oklahoma City	San Antonio	

The National Aviation System Plan Fiscal Years 1976-1985,
(March, 1975), p. 6-5.

Preceding Page BLANK - FILMED

APPENDIX D. FEDERAL AVIATION ADMINISTRATION REGIONS AND REGIONAL OFFICES

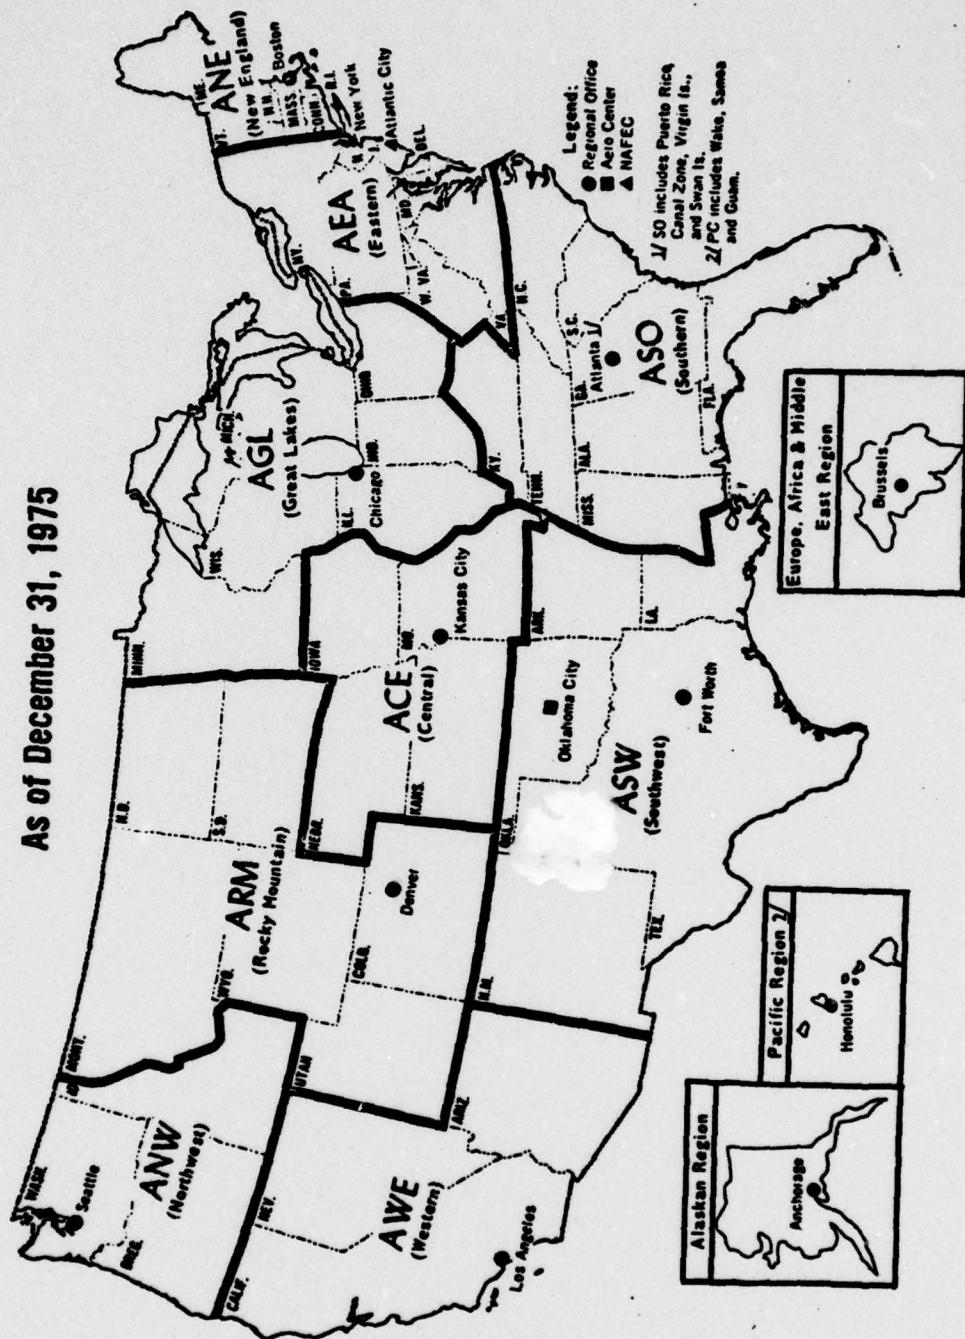

FAA Air Traffic Activity Calendar Year 1975, (March, 1975), p. 10.

Preceding Page BLANK - NOT FILMED

APPENDIX E. COMPUTED AIRCRAFT TYPES

<u>TYPE</u>	<u>DESCRIPTION</u>
1.	Fixed wing single engine piston 1-3 seats
2.	Fixed wing single engine piston 4+ seats
3.	Fixed wing two engine piston 1-6 seats
4.	Fixed wing two engine piston 7+ seats
5.	Fixed wing other
6.	Fixed wing two engine turboprop 1-12 seats
7.	Fixed wing two engine turboprop 13+ seats
8.	Fixed wing turboprop other
9.	Fixed wing two engine turbojet
10.	Fixed wing turbojet other
11.	Rotorcraft piston
12.	Rotorcraft turbine
13.	Other aircraft

APPENDIX F. SAMPLING AND CONTINGENCY TABLE METHODOLOGY

Because of the large number of GA aircraft (169,030) assigned to CG's, it would have been cumbersome to use all of them in the CG analysis. Consequently, a contingency table analysis was performed on a sample of aircraft to identify homogeneous subgroups of aircraft within each CG. The results of the analysis were then applied to all 169,030 aircraft with the results appearing in Tables 20 and 21 and Figures 1 through 15. Sampling and contingency table analysis are discussed thoroughly below.

Sampling

The sampling criterion used was a desired standard error of 0.25 percent when estimating proportions with 95 percent confidence. This criterion yielded a sample size of 1537 aircraft for each hierarchical group when uncorrected for finite population. In the interest of conservation 1537 aircraft were drawn from each hierarchical CG regardless of its size. The calculations used for determining sample size are shown in the box below.

The sampled aircraft were then regrouped by non-hierarchical CG's to obtain samples for the non-hierarchical analysis. A better method would have been to sample 1537 aircraft from each of the original non-hierarchical CG's, but this was constrained by the design of the computerized data base in hierarchical group order. Nonetheless, a precision of 0.05 percent or less was achieved using the regrouped samples with only two exceptions at 0.06 percent.

Contingency Tables

Large groups of homogeneous aircraft within CG's were discovered through contingency table analysis. Contingency tables are simply a means for displaying large amounts of categorical data. In this case, each GA aircraft can be described in terms of the nine characteristics, or factors, discussed in the previous

Calculation of Sample Size for
Hierarchical CG's

n' = sample size for a hierarchical CG unadjusted for finite population

n = sample size for a hierarchical CG adjusted for finite population

s.e. = desired standard error of estimate

p = estimated value of proportion

q = 1-p

$1 - \alpha$ = confidence level

z = value of standardized normal distribution

N = size of finite population

$$n' = \frac{pq}{(s.e.)^2} (z_{1-\alpha})^2$$

Substituting $\hat{p}=\hat{q}=0.5$ (conservative estimates),

s.e. = .025, and $z_{1-.05} = 1.96$,

$$n' = \frac{(0.5)(0.5)}{(0.025)^2} (1.96)^2 = 1527$$

For hierarchical CG 1, for example,

$$\text{Finite population correction factor (FPCF)} = \frac{1}{1 + \frac{n'}{N}} = \frac{1}{1 + \frac{1537}{26632}} = .95$$

$$n = n'(FPCF) = 1537(.95) = 1453$$

section. Each aircraft will fall into a particular category, or level, of each factor. A contingency table displays all combinations of factor levels possible taking one level from each factor using all available factors, and the number of aircraft characterized by each combination. By examining contingency table displays one can identify combinations, or cells, containing large numbers of aircraft. A large group of aircraft within a single cell would comprise a group with homogeneous characteristics.

The large number of cells (almost half a billion) for a full contingency table required the application of cell-reducing methods to the data. First, use was made of Computed Aircraft Type which combines the individual factors of Aircraft Type (simple), Engine Type, Number of Engines, and Number of Seats into one compact and meaningful factor. This immediately reduced the number of unique factors from nine to five.

Second, instead of recording Hours Flown and Age of Aircraft in 50-hour and 5-year intervals, respectively, they were recorded in wider intervals.

Third, preliminary contingency tables that were formed including FAA Base Airport Region as a factor tended to indicate that region was not an important distinguishing factor among subgroups of aircraft. This factor was eventually dropped from the major analysis.

Finally, if it was determined that a factor level of the remaining two factors contained a very small portion of the aircraft in that CG, say 3 percent or less, it was eliminated from the analysis entirely. These four methods effectively reduced the number of cells in any one analysis and facilitated the identification of subgroups.

A series of 2, 3, and 4-way contingency tables were formed using the sampled aircraft and large (\geq 5 percent of the sample) non-overlapping subgroups of aircraft were identified.

Aircraft were eliminated from contingency tables if information on one of the specified factors was missing. For instance,

if an aircraft had imputed hours, it was not included in any contingency gable having hours flown or primary use as factors.

In performing these analyses, the object was for each CG to find a small number of large subgroups described by as many of the factors as possible. The nature of the CG's themselves determined the degree to which this objective could be accomplished. If the aircraft within a CG were very diverse in nature, one had to settle for more smaller-sized subgroups, or subgroups described by fewer factors, or both.

GLOSSARY*

1. Aerial Application - Aerial application in agriculture consists of those activities that involve the discharge of materials from aircraft in flight and a miscellaneous collection of minor activities that do not require the distribution of any materials.
2. Air Carrier - The term "Air Carrier", as used in this report, refers to aircraft operators certificated by the Federal Aviation Administration for the transportation by air of persons, property, and mail.
3. Air Carrier Operations - Aircraft operating under certificates of public convenience and necessity, issued by the CAB, authorizing the performance of scheduled air transportation over specified routes and a limited amount of nonscheduled operations.
4. Airport Advisory Area - The area within five statute miles of an airport not served by a control tower, i.e., there is no tower or the tower is not in operation, on which is located a Flight Service Station.
5. Airport Traffic Area - Unless otherwise specifically designated in FAR Part 93, that airspace within a horizontal radius of 5 statute miles from the geographical center of any airport at which a control tower is operating, extending from the surface up to, but not including, an altitude of 3,000 feet above the elevation of the airport. Unless otherwise authorized or required by ATC, no person may operate an aircraft

*These definitions have been taken from the following three sources: Airman's Information Manual, Part 1, Census of U.S. Civil Aircraft Calendar Year 1975, and FAA Air Traffic Activity, Calendar Year 1975.

within an airport traffic area except for the purpose of landing at, or taking off from, an airport within that area. ATC authorizations may be given as individual approval of specific operations or may be contained in written agreements between airport users and the tower concerned. (Refer to FAR Parts 1 and 91.)

6. Airport Traffic Control Tower - A central operations facility in the terminal air traffic control system, consisting of tower cab structure, including an associated common IFR room if radar equipped, using air/ground communications and/or radar, visual signalling and other devices, to provide safe and expeditious movement of terminal air traffic.
7. Air Taxi Operations - Air taxi operations and commuter air carrier operations (takeoffs and landings) carrying passengers, mail or cargo for revenue in accordance with FAR Part 135 or Part 121.
8. Airway/Federal Airway - A control area or portion thereof established in the form of a corridor, the centerline of which is defined by radio navigational aids (Refer to FAR Part 7.)
9. Altitude - The height of the level, point or object measured in feet Above Ground Level (AGL) or from Mean Sea Level (MSL).
 1. MSL Altitude - Altitude, expressed in feet measured from mean sea level.
 2. AGL Altitude - Altitude, expressed in feet measured above ground level.
 3. Indicated Altitude - The altitude as shown by an altimeter. On a pressure or barometric altimeter it is altitude as shown uncorrected for instrument error and uncompensated for variation from standard atmospheric conditions.
10. Area Navigation/RNAV - A method of navigation that permits aircraft operations on any desired course within the coverage of station-referenced navigation signals or within the limits of self-contained system capability (Refer to FAR Part 71.)

- a. Area Navigation Low Route - An area navigation route within the airspace extending upward from 1,200 feet above the surface of the earth to, but not including, 18,000 feet MSL.
 - b. Area Navigation High Route - An area navigation route within the airspace extending upward from and including 18,000 feet MSL to flight level 450.
 - c. Random Area Navigation Routes/Random RNAV Routes - Direct routes, based on area navigation capability, between waypoints, defined in terms of degree/distance fixes or offset from published or established routes/airways at specified distance and direction.
 - d. RNAV Waypoint/W/P - A predetermined geographical position used for route or instrument approach definition or progress reporting purposes that is defined to a VORTAC station position.
11. Automatic Altitude Reporting - That function of a transponder which responds to Mode C interrogations by transmitting the aircraft's altitude in 100-foot increments.
 12. Automatic Direction Finder/ADF - An aircraft radio navigation system which senses and indicates the direction to a L/MF nondirectional radio beacon (NDB) ground transmitter. Direction is indicated to the pilot as a magnetic bearing or as a relative bearing to the longitudinal axis of the aircraft depending on the type of indicator installed in the aircraft. In certain applications, such as military, ADF operations may be based on airborne and ground transmitters in the VHF/UHF frequency spectrum.
 13. Balloon - A lighter-than-air aircraft that is not engine driven.
 14. Business Transportation - Any use of an aircraft not for compensation or hire by an individual for the purposes of transportation required by a business in which he is engaged.
 15. Certificated Pilot - A person who holds a certificate issued by FAA, which qualifies him to operate aircraft within the limitations prescribed on the certificate.

16. Colored (L/MF) Airway - Low altitude airway over the state of Alaska predicated on L/MF navigation aids. It is depicted on aeronautical charts by color and number.
17. Continental United States - The 49 states located on the continent of North America and the District of Columbia.
18. Conterminous U.S. - The forty-eight adjoining states and the District of Columbia.
19. Controlled Airport - An airport at which a control tower is in operation.
20. Controlled Airspace - Airspace, designated as a continental control area, control area, control zone, terminal control area, or transition area, within which some or all aircraft may be subject to air traffic control (Refer to FAR Part 71).

Types of U.S. Controlled Airspace:

- a. Continental Control Area - The airspace of the 48 contiguous states, the District of Columbia and Alaska, excluding the Alaska peninsula west of Long. 160 00'00"W at and above 14,500 MSL, but does not include:
 1. The airspace less than 1,500 feet above the surface of the earth or,
 2. Prohibited and restricted areas, other than the restricted areas listed in FAR Part 71.
- b. Control Area - Airspace designated as Colored Federal Airways, VOR Federal Airways, Terminal Control Areas, Additional Control Areas, and Control Area Extensions, but not including the Continental Control Area. Unless otherwise designated, control areas also include the airspace between a segment of a main VOR airway and its associated alternate segments. The vertical extent of the various categories of airspace contained in control areas are defined in FAR Part 71.
- c. Control Zone - Controlled airspace which extends upward from the surface and terminates at the base of the continental control area. Control zones that do not underlie the continental control area have no upper limit. A control zone may include one or more airports and is normally a circular area within a radius of 5 statute miles and any extensions necessary to include instrument approach and departure paths.

- d. Terminal Control Area/TCA - Controlled airspace extending upward from the surface or higher to specified altitudes within which all aircraft are subject to operating rules and pilot and equipment requirements specified in FAR Part 91. TCA's are depicted on Sectional, World Aeronautical, En Route Low Altitude and TCA charts. (Refer to FAR Part 91).
 - e. Transition Area - Controlled airspace extending upward from 700 feet or more above the surface of the earth when designated in conjunction with an airport for which an approved instrument approach procedure has been prescribed, or from 1,200 feet or more above the surface of the earth when designated in conjunction with airway route structures or segments. Unless otherwise limited, transition areas terminate at the base of the overlying controlled airspace. Transition areas are designed to contain IFR operations in controlled airspace during portions of the terminal operations and while transiting between the terminal and en route environment.
21. Dirigible - A lighter-than-air aircraft, engine propelled, with an inward metal frame which maintains its shape.
 22. Distance Measuring Equipment/DME - Equipment (airborne and ground) used to measure, in nautical miles, the slant range distance of an aircraft from the DME navigation aid.
 23. En Route - The route of flight from point of departure to point of destination, including intermediate stops (excludes local operations).
 24. Executive Transportation - Any use of an aircraft by a corporation, company or other organization for the purposes of transporting its employees and/or property not for compensation or hire and employing professional pilots for the operation of the aircraft.
 25. FAA - Federal Aviation Administration
 26. Fixed-Wing Aircraft - Aircraft having wings fixed to the airplane fuselage and outspread in flight, i.e., nonrotating wings.

27. Flight Service Station/FSS - Air Traffic Service facilities within the National Airspace System (NAS) which provide pre-flight pilot briefing and en route communications with VFR flights, assist lost IFR/VFR aircraft, assist aircraft having emergencies, relay ATC clearances, originate, classify, and disseminate Notices to Airmen, broadcast aviation weather and NAS information, receive and close flight plans, monitor radio NAVAIDS, notify search and rescue units of missing VFR aircraft, and operate the national weather teletypewriter systems. In addition, at selected locations FSS's take weather observations, issue airport advisories, administer airman written examinations, and advise Customs and Immigrations of transborder flight.
28. General Aviation/GA - That portion of civil aviation which encompasses all facets of aviation except air carriers holding a certificate of public convenience and necessity from the Civil Aeronautics Board, and large aircraft commercial operators.
29. General Aviation Aircraft - All civil aircraft except those classified as air carrier.
30. Group I Terminal Control Area - A TCA representing one of the nine busiest locations in the U.S. in terms of aircraft operations and passengers carried within which it is necessary for safety reasons to have strict requirements for operation.
31. Group II Terminal Control Area - A TCA representing one of the twelve less busy locations than a Group I TCA and requiring less stringent pilot and equipment requirements.
32. Group III Terminal Control Area - One of the 43 least busy TCA's where an ARTS-III system exists.
33. IFR Conditions - Weather conditions below the minimum for flight under visual rules.

34. Industrial/Special - Any use of an aircraft for specialized work allied with industrial activity; excluding transportation and aerial application. (Examples: pipe line patrol; survey; advertising; photography; helicopter hoist; etc.)
 35. Instructional Flying - Any use of an aircraft for the purposes of formal instruction with the flight instructor aboard, or with the maneuvers on the particular flight (s) specified by the flight instructor.
 36. Instrument Flight Rules/IFR - Rules governing the procedures for conducting instrument flight. Also a term used by pilots and controllers to indicate type of flight plan (See Visual Flight Rules).
 37. Instrument Landing System/ILS - A precision instrument approach system consisting of the following electronic components and visual aids:
 - a. Localizer
 - b. Glide Slope
 - c. Outer Marker
 - d. Middle Marker
 - e. Approach Lights
- Refer to FAR Part 91.
38. Jet Route - A route designed to serve aircraft operations from 18,000 MSL up to and including flight level 450. The routes are referred to as "J" routes with numbering to identify the designated route, e.g., J 105. (Refer to FAR Part 71.)
 39. Low Altitude Airway Structure/Federal Airways - The network of airways serving aircraft operations up to but not including 18,000 MSL. (See Airway.)
 40. Microwave Landing System/MLS - An instrument landing system operating in the microwave spectrum which provides lateral and vertical guidance to aircraft having compatible avionics equipment. (See Instrument Landing System.)

41. Non-Positive Controlled Airspace - Controlled airspace below 18,000 feet MSL.
42. Personal and Pleasure Flying - Any use of an aircraft for personal purposes not associated with business or profession, and not for hire. This includes maintenance of pilot proficiency.
43. Pilot Briefing - Information furnished a pilot to assist in flight planning. Principal items are weather conditions, notices to airmen, routes, and preparation and handling of the flight plan.
44. Piston-Powered Aircraft - An aircraft operated by engines in which pistons moving back and forth work upon a crank shaft or other device to create rotational movement.
45. Positive Controlled Area/PCA - Airspace designated in Far Part 71 wherein aircraft are required to be operated under Instrument Flight Rules (IFR). Vertical extent of PCA is from 18,000 feet to and including flight level 600 throughout most of the conterminous United States and from flight level 240 to and including flight level 600 in designated portions of Alaska.
46. Radio Altimeter/Radar Altimeter - Aircraft equipment which makes use of the reflection of radio waves from the ground to determine the height of the aircraft above the surface.
47. Region (FAA) - A principal subdivision of the Federal Aviation Administration organized to carry out FAA programs under the executive direction of a regional director within the specific geographic boundaries.
48. Registered Aircraft - Aircraft registered with FAA.
49. Rotorcraft - A heavier-than-air aircraft that derives lift from one or more revolving "wings" or blades, engine-driven about an approximately vertical axis. A rotorcraft does not have conventional fixed wings, nor in any but some earlier models is it provided with a conventional propeller, forward thrust

and lift being furnished by the rotor. The powered rotor blades also enable the machine to hover, and to land and take off vertically.

50. Transponder - The airborne radar beacon receiver/transmitter portion of the Air Traffic Control Radar Beacon System (ATCRBS), which automatically receives signals from interrogations being received on the mode to which it is set to respond.
51. Turbine-Powered Aircraft - Includes aircraft with either turbojet, turbofan, turboprop, or turboshaft engines.
52. Turbojet - Aircraft operated by jet engines incorporating a turbine-driven air compressor to take in and compress the air for the combustion of fuel, the gases of combustion (or the heated air) being used both to rotate the turbine and to create a thrust-producing engine.
53. Turboprop - Aircraft in which the main propulsive force is supplied by a gas turbine-driven conventional propeller. Additional propulsive force may be supplied from the discharge turbine exhaust gas.
54. Uncontrolled Airport - Also known as a non-tower airport, an airport at which no control tower is in operation. It may have an FSS, UNICOM operator, or no facility at all.
55. Uncontrolled Airspace - That portion of the airspace that has not been designated as continental control area, control area, control zone, terminal control area, or transition area. (See Controlled Airspace)
56. Unicom - A non-government air/ground radio communication facility, which may provide airport advisory service at certain airports. Locations and frequencies of UNICOM's are shown on aeronautical charts and publications.
57. U.S. Civil Aircraft Fleet - All aircraft under U.S. registry exclusive of Military.

58. Visual Flight Rules/VFR - Rules that govern the procedures for conducting flight under visual conditions. The term "VFR" is also used in the United States to indicate weather conditions that are equal to or greater than minimum VFR requirements. In addition, it is used by pilots and controllers to indicate type of flight plan. (See Instrument Flight Rules) (Refer to FAR Part 91.)
59. VOR Airway - Low altitude airway designated from 1,200 feet AGL to 18,000 feet MSL predicated on VOR/VORTAC navigation aids. Also known as a "Victor" airway, it is indicated by a "V" on aeronautical charts and is numbered similarly to the U.S. highway system.
60. VOR/Very High Frequency Omnidirectional Range Station - A ground-based electronic navigation aid transmitting very high frequency navigation signals, 360 degrees in azimuth, oriented from magnetic north. Used as the basis for navigation in the national airspace system. The VOR periodically identifies itself by morse code and may have an additional voice identification feature. Voice features may be used by ATC or FSS for transmitting instructions/information to pilots.

BIBLIOGRAPHY

Airman's Information Manual, Parts 1, 2, 3, 3A, 4. U.S. Department of Transportation, Federal Aviation Administration, Washington DC: U.S. Government Printing Office, 1975-1976.

Approval of Area Navigation Systems for Use in the U.S. National Airspace System, Advisory Circular 90-45A, U.S. Department of Transportation, Federal Aviation Administration, Washington DC: U.S. Department of Transportation, Publications Section, 1975.

Belyamani, Mohamed Seddik, "General Aviation: A Survey of its Diverse Activities and Current Problems", Masters Thesis, Massachusetts Institute of Technology, Cambridge MA, 1973.

Bishop, Yvonne E., Stephen E. Feinberg, and Paul W. Holland, Discrete Multivariate Analysis: Theory and Practice, Cambridge MA: the MIT Press, 1975.

Business and Commercial Aviation, (April 1976).

Census of U.S. Civil Aircraft Calendar Year 1975 and 1974, U.S. Department of Transportation, Federal Aviation Administration, Washington DC: U.S. Government Printing Office, 1976 and 1975.

Dodge, Stephen M., "Comparative Analysis of Area Navigation Systems for General Aviation", Masters Thesis, Massachusetts Institute of Technology, Cambridge MA, 1973.

Electronics Research and Development for Civil Aviation, Electronics Division of the Institution of Electrical Engineers, London GB, 1963.

FAA Air Traffic Activity Calendar Year 1975, U.S. Department of Transportation, Federal Aviation Administration, Washington: U.S. Government Printing Office, 1976.

Federal Aviation Regulations, U.S. Department of Transportation, Federal Aviation Administration, Washington DC: U.S. Government Printing Office, 1974.

Instrument Flying Handbook, U.S. Department of Transportation, Federal Aviation Administration, Washington DC: U.S. Government Printing Office, 1974.

Kershner, William K., The Student Pilot's Flight Manual, Ames IA: Iowa State University Press, 1973.

Klass, Philip J., "FAA Refines Anti-Collision Plan Details",
Aviation Week and Space Technology, (March 15, 1976),
172-181.

The National Aviation System Plan Fiscal Years 1976-1985,
of Transportation, Federal Aviation Administration,
Washington DC: U.S. Government Printing Office, 1975.

The National Aviation System Plan Ten Year Plan 1973-1982,
U.S. Department of Transportation, Federal Aviation
Administration, Washington DC: U.S. Government Printing
Office, 1975.

The National Aviation System Policy Summary, U.S. Depart-
ment of Transportation, Federal Aviation Administration,
Washington DC: U.S. Government Printing Office, 1973.

Terminal Air Traffic Control, U.S. Department of Transpor-
tation, Federal Aviation Administration, Washington: U.S.
Government Printing Office, 1973.

United States Standards for Terminal Instrument Procedures
(TERPS), U.S. Department of Transportation, Federal
Aviation Administration, Washington DC: U.S. Government
Printing Office, 1970.

Vahovich, Stephen G., General Aviation: Aircraft, Owner
& Utilization Characteristics, Washington DC: U.S.
Government Printing Office, 1976.

200Copies