

AD-A046 385

NAVAL POSTGRADUATE SCHOOL MONTEREY CALIF  
A FINITE ELEMENT PREPROCESSOR FOR SAP IV AND ADINA. (U)  
SEP 77 A E KIBLER

F/G 9/2  
•(U)

F/G 9/2


UNCLASSIFIED

1 OF 2  
ADA  
046385

NL

NL



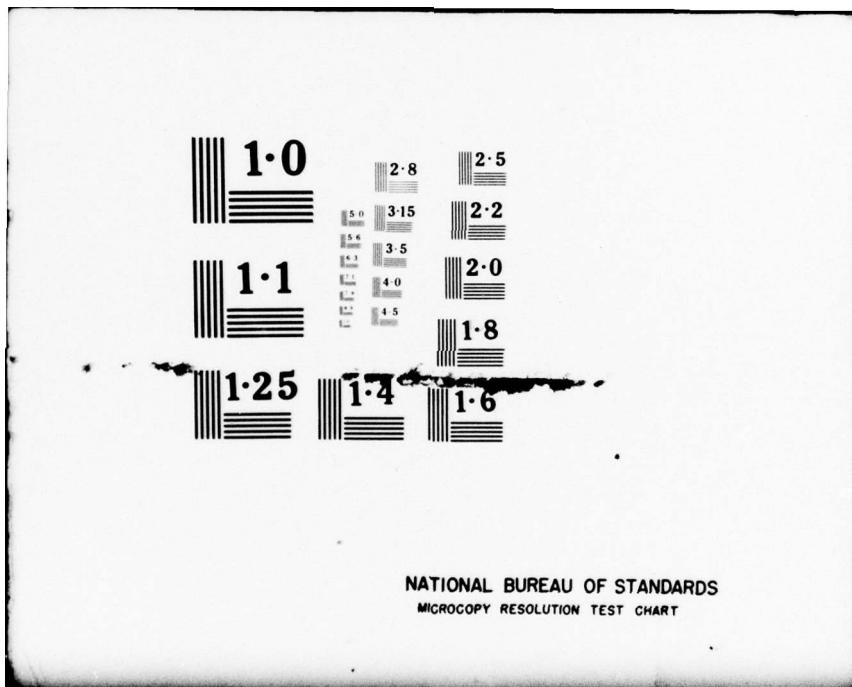


AD A 0 46385

2  
B.S.

# NAVAL POSTGRADUATE SCHOOL

## Monterey, California

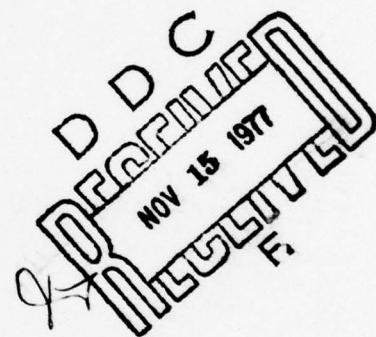

# THESIS

A FINITE ELEMENT PREPROCESSOR  
FOR SAP IV AND ADINA

by

Adrian Earl Kibler, Jr.

September 1977

Thesis Advisor:

G. Cantin

AD No. \_\_\_\_\_  
DDC FILE COPY:

Approved for public release, distribution unlimited.

## UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE   |                       | READ INSTRUCTIONS BEFORE COMPLETING FORM                                |
|---|-----------------------|---|
| 1. REPORT NUMBER<br><i>(6)</i>  | 2. GOVT ACCESSION NO. | 3. RECIPIENT'S CATALOG NUMBER   |
| 4. TITLE (and Subtitle)<br>A Finite Element Preprocessor for SAP IV and ADINA.  |                       | 5. TYPE OF REPORT & PERIOD COVERED<br>Master's Thesis<br>September 1977 |
| 7. AUTHOR(s)<br>Adrian Earl Kibler, Jr.   |                       | 6. PERFORMING ORG. REPORT NUMBER  |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br>Naval Postgraduate School<br>Monterey, California 93940  |                       | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS             |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br>Naval Postgraduate School<br>Monterey, California 93940  |                       | 12. REPORT DATE<br>September 1977                                       |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)<br><i>(12) 134p.</i>  |                       | 13. NUMBER OF PAGES<br>131  |
|   |                       | 15. SECURITY CLASS. (of this report)<br>Unclassified                    |
|   |                       | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE                              |
| 16. DISTRIBUTION STATEMENT (of this Report)<br>Approved for public release; distribution unlimited.   |                       |   |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)  |                       |   |
| 18. SUPPLEMENTARY NOTES   |                       |   |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)<br>Data Checking, Preprocessor, Postprocessor, Finite Element, Computer Code, SAP IV, ADINA  |                       |   |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number)<br>The primary purpose of this thesis was to provide a method of checking the geometry and element connectivity input data for two finite element programs, ADINA and SAP IV. This preprocessor will accept the ADINA or SAP IV data deck, with minor modifications, and generate a graphical display of the finite element model. The display is an oblique orthographic projection, and any orientation may be specified. Several |                       |   |

*251450**LB*

## UNCLASSIFIED

~~SECURITY CLASSIFICATION OF THIS PAGE/When Data Entered.~~

## (20. ABSTRACT Continued)

options are available: exploded plots, partial plots, node numbering, element numbering, and others. Elements with three nodes on the same edge are plotted with a continuous curve on each edge generated by an interpolated parabola. Displacement postprocessing capability also exists.



Approved for public release; distribution unlimited.

A Finite Element Preprocessor  
for SAP IV and ADINA

by

Adrian Earl Kibler, Jr.  
Lieutenant, United States Navy  
B.S.E.E., Pennsylvania State University, 1972

Submitted in partial fulfillment of the  
requirements for the degree of

MASTER OF SCIENCE IN MECHANICAL ENGINEERING

from the  
NAVAL POSTGRADUATE SCHOOL  
September 1977

Author

Adrian Earl Kibler Jr.

Approved by:

Gilles Cantin

Thesis Advisor

R. E. Newton

Second Reader

Allen E. Tuluks

Chairman, Department of Mechanical Engineering

Robert A. Judd

Dean of Science and Engineering

## ABSTRACT

The primary purpose of this thesis was to provide a method of checking the geometry and element connectivity input data for two finite element programs, ADINA and SAP IV. This preprocessor will accept the ADINA or SAP IV data deck, with minor modifications, and generate a graphical display of the finite element model. The display is an oblique orthographic projection, and any orientation may be specified. Several options are available: exploded plots, partial plots, node numbering, element numbering, and others. Elements with three nodes on the same edge are plotted with a continuous curve on each edge generated by an interpolated parabola. Displacement postprocessing capability also exists.

TABLE OF CONTENTS

|     |  |    |
|-----|--|----|
| I.  | INTRODUCTION -----   | 10 |
| A.  | GENERAL -----  | 10 |
| 1.  | Preprocessing -----  | 10 |
| 2.  | Postprocessing -----   | 11 |
| B.  | HISTORY OF DEVELOPMENT OF PSAP1 -----                              | 12 |
| 1.  | SUBROUTINE PSAP Implementation -----                               | 12 |
| 2.  | Motivation for SUBROUTINE PSAP1 -----                              | 12 |
| C.  | PRESENT CAPABILITY -----   | 13 |
| D.  | EASE OF MODIFICATION -----   | 15 |
| II. | PROGRAM ORGANIZATION AND DESCRIPTION<br>OF OPERATION -----         | 16 |
| A.  | PSAP1 FLOW CHART -----   | 16 |
| B.  | NAMELIST AND EULER ANGLES -----                                    | 16 |
| 1.  | NAMELIST OPTION -----  | 16 |
| 2.  | NAMELIST PICT -----  | 18 |
| a.  | Oblique Orthographic Projections<br>(Euler Angles) -----           | 18 |
| b.  | Scaling -----  | 20 |
| c.  | Partial Plots -----  | 20 |
| C.  | NODAL POINT (GEOMETRY) INFORMATION<br>READ-IN -----                | 21 |
| D.  | ELEMENT (CONNECTIVITY) INFORMATION<br>READ-IN -----                | 21 |
| E.  | DISPLACEMENT DATA READ-IN FOR<br>DISPLACEMENT POSTPROCESSING ----- | 21 |
| F.  | PLOTTING LOGIC -----   | 24 |

|  |     |
|--|-----|
| III. PSAP1 SAMPLE PROBLEMS -----             | 27  |
| A. ADINA EXAMPLES -----                      | 27  |
| 1. Reinforced Concrete Beam -----            | 27  |
| 2. Flat Plate With Hole -----                | 35  |
| B. SAP IV EXAMPLES -----                     | 35  |
| 1. SAP IV Truss Problem -----                | 35  |
| 2. Cylindrical Bar with Spherical Hole ----- | 46  |
| IV. CONCLUSIONS AND RECOMMENDATIONS -----    | 59  |
| APPENDIX A: PSAP1 USER'S MANUAL -----        | 60  |
| APPENDIX B: SUBROUTINE PSAP1 LISTING -----   | 78  |
| LIST OF REFERENCES -----                     | 129 |
| INITIAL DISTRIBUTION LIST -----              | 130 |

## LIST OF FIGURES

|     |  |                |
|-----|--|----------------|
| 1.  | Flow chart of program PSAP1 -----  | 17             |
| 2.  | Flow chart for reading geometry and element<br>connectivity data -----   | 22             |
| 3.  | Nodal point and displacement storage arrays -----  | 23             |
| 4.  | Flow chart for PSAP1 plotting subroutine, PLOTX --   | 25             |
| 5.  | Example 1, ADINA truss and 8 node plane elements,<br>Reinforced Concrete Beam (Given on page 84,<br>reference 2) -----             | 28             |
| 6.  | Example 1, ADINA input deck listing.<br>Page 1 of 2 -----  | 29             |
|     | Page 2 of 2 -----  | 30             |
| 7.  | Example 1, PSAP1 input deck listing.<br>Page 1 of 2 -----  | 31             |
|     | Page 2 of 2 -----  | 32             |
| 8.  | Example 1, PSAP1 output graphs.<br>(a) Undeformed structure, nodes numbered -----<br>(b) Exploded plot, elements numbered -----    | 33<br>34       |
| 9.  | Example 2, flat plate with a hole in tension -----   | 36             |
| 10. | Example 2, PSAP1 input deck listing.<br>Page 1 of 3 -----<br>Page 2 of 3 -----<br>Page 3 of 3 -----                                | 37<br>38<br>39 |
| 11. | Example 2, PSAP1 output graphs.<br>(a) Actual mesh, nodes numbered -----<br>(b) Symmetric representation, elements numbered --     | 40<br>41       |
| 12. | Example 3, SAP IV truss element problem -----  | 42             |
| 13. | Example 3, PSAP1 input deck listing.<br>Page 1 of 2 -----<br>Page 2 of 2 -----   | 43<br>44       |
| 14. | Example 3, PSAP1 output graphs -----   | 45             |
| 15. | Example 4, six inch diameter cylindrical bar<br>with a two inch diameter spherical void on<br>the center line under pressure ----- | 47             |

LIST OF FIGURES (CONTINUED)

|     |  |    |
|-----|--|----|
| 16. | Example 4, PSAP1 input deck listing.   |    |
|     | Page 1 of 6 -----  | 48 |
|     | Page 2 of 6 -----  | 49 |
|     | Page 3 of 6 -----  | 50 |
|     | Page 4 of 6 -----  | 51 |
|     | Page 5 of 6 -----  | 52 |
|     | Page 6 of 6 -----  | 53 |
| 17. | Example 4, PSAP1 output graphs.  |    |
| (a) | Total structure -----  | 54 |
| (b) | Elements 1-10, nodes numbered -----  | 55 |
| (c) | Elements 1-10, elements numbered,<br>exploded plot -----   | 56 |
| (d) | Elements 11-20, nodes numbered -----   | 57 |
| (e) | Elements 11-20, elements numbered,<br>exploded plot -----  | 58 |
| 18. | Coordinate system and Euler angles (rotations)<br>for oblique orthographic projection shown in<br>X-Z viewing plane.<br>(Taken from reference 4, page 127) ----- | 70 |

ACKNOWLEDGMENT

I would like to acknowledge my sincere and deep appreciation to all those who were instrumental in providing me with motivation and assistance in the development of this thesis. In particular I would like to thank Professor Gilles Cantin, my thesis advisor, for his friendship, assistance and excellent academic guidance; Professor R. E. Ball for providing me with the original deck of cards and helpful guidance; and my wife and family for the sacrifices they have made while I have been in pursuit of my profession.

## I. INTRODUCTION

### A. GENERAL

The continued developments and advancements of the finite element method this last decade have provided greater machine capabilities than ever before. Here at the Naval Postgraduate School (NPS), two of the more favorable finite element programs are SAP IV [reference 1] for linear analysis and ADINA [reference 2] for nonlinear analysis. However, with the large amounts of numerical input/output data and automatic mesh generation, it is impractical to check and reduce this data without a graphical representation. Data checking is divided into two areas: preprocessing and postprocessing.

#### 1. Preprocessing

Preprocessing is the checking of the input data deck. Errors in a finite element program occur basically in two areas. First, how close is the mathematical model (boundary conditions, loading conditions, material properties, etc.) to the real problem? Second, are numerical errors present, or did misinterpretation of instructions occur in data deck preparation? Of the second type, most common errors are found in the geometry and element connectivity data. Preprocessing includes the forming of a graphical representation of the finite element model on which geometry and element errors are easily detected. When

node and element numbering options are available, the graph aids in the physical interpretation of the output data. Preprocessing is not a foolproof method of eliminating errors, but it does provide a tremendous advantage to the user. Preprocessors may be incorporated into the data check mode of the finite element program. However, to modify a large and complex program is dangerous. This may not be the best approach. A safer method is to develop a preprocessor which will read the finite element program deck separately with minimum modifications to that deck.

## 2. Postprocessing

Though not as important as preprocessing, postprocessing is extremely helpful in output analysis. Probably the most common and useful type of postprocessing is the contour plot. Appendix C of reference 4 lists a program developed to produce contour plots of stress data from finite element models. Contour plots can easily be adapted to a 2D system, but 3D requires plotting the contours on 2D surfaces, a bit more complicated. Two methods of postprocessing of displacements are the plotting of a deformed model or placing scaled vectors at the nodes. In the cases where the displacements are small, multiplication by a magnification factor produces an exaggerated representation. Like preprocessing, postprocessing can be incorporated into the finite element program directly, or done separately. When done separately, the finite element program must still be modified slightly to obtain a punched deck of the stresses

and displacements in the desired format. This thesis is primarily concerned with preprocessing.

#### B. HISTORY OF DEVELOPMENT OF PSAP1

A package [reference 4] containing digital computer programs for generating oblique orthographic projections and contour plots was produced by the National Aeronautics and Space Administration's (NASA) Langley Research Center (LRC) and distributed by the National Technical Information Service in January, 1975. The programs are completely general. Both programs contain options for selecting various plotting equipment including CALCOMP, VARIAN, and cathode ray tube (CRT) displays. With minor modifications, they can be adapted to most any system.

##### 1. SUBROUTINE PSAP Implementation

Losh [reference 6], for his master's thesis in aeronautical engineering, implemented the preprocessor and postprocessor program, PSAP, at NPS in December, 1976. Modifying the LRC package [reference 4], Losh adapted SUBROUTINE PSAP to the NPS IBM 360/67 system using the CALCOMP model 765 plotter. PSAP serves as a preprocessor for SAP IV models, and serves as a postprocessor for displacements of those models. Unfortunately, PSAP is severely limited in the type of elements it can plot.

##### 2. Motivation for SUBROUTINE PSAP1

With the introduction of the ADINA [reference 2] program at NPS in January, 1977, and with expectation of

doing future analysis on ceramic turbine blades, it was desired to expand PSAP to include all ADINA elements and the 8-20 node brick elements in SAP IV. Like PSAP, PSAP1 contains preprocessing and displacement postprocessing capabilities. PSAP1 is presented in this thesis and has the following improvements over PSAP:

- a. Preprocessing for all ADINA elements.
- b. SAP IV 8 and 8-20 node elements.
- c. Expansion of SUBROUTINE ERROR.
- d. Interpolation of curves using shape functions [reference 3] through three points on the edges of the 8-20 node brick elements and the 4-8 node plane elements.
- e. Improvements in defining the plot origin.
- f. Addition of an option (ISCALE = 0) to plot sections of a model without losing perspective.
- g. Several other minor modifications considered improvements.

#### C. PRESENT CAPABILITY

PSAP1 has the capability to plot all ADINA elements and all SAP IV elements except the pipe element. It will interpolate curves on the edges of 4-8 node plane elements and 8-20 node brick elements. Many options are given in Appendix A. Some of the more frequently used options are listed below:

1. Numbering of grid points (NOTAT = 1).
2. Numbering of the elements (NOTAT = 2).
3. Exploded plot (KDISP = 2).

4. Postprocessing of displacements (NUDISP or NVDISP or NW DISP = 1) in two forms: plot of deformed structure (KDISP = 1) or displacements represented by vectors at the nodes (KDISP = 3; see reference 6).

5. Symmetric representation about the XY (KSYMXY = 1), XZ (KSYMxz = 1) or YZ(KSYMYZ = 1) planes.

6. Option to plot sections of the model (partial plot) to obtain a better view. Partial plots may be plotted to the scale of the complete model to avoid losing perspective (ISCALE = 0) or blown up to obtain a better view (ISCALE = 1). Multiple plots may be obtained using the same geometry and same displacement data (KODE = 1), same geometry and new displacement data (KODE = 2), or new geometry and new displacement data (KODE = 3; see figure 1).

In general, multiple plots (sections, partial plots, additional problems) present no problem. Plotting package user courtesy dictates that no more than 5 plots be placed on the CALCOMP plotter at any one time. Also, if the plots contain many elements (especially 8-20 node elements), it is possible to run out of space in the plotting data sets. When this happens, you will receive

ERROR IHC240I STAE, ABEND CODE IS: SYSTEM OB37 SYS PLOT.

The best thing to do is split the run into two jobs. If the job must be run on one job (i.e., a large number of elements in the model or an assembly drawing where the scale of multiple plots is the same), then SYS PLOT space

may be increased [references 7 and 8] by adding the card

```
//GO.SYS PLOT DD SPACE=(CYL,(needed space)),SYSOUT=C
```

just prior to card

```
//GO.FT10F001 DD UNIT = SYSDA
```

in Appendix A. It would be wise to seek advice from a consultant in Ingersoll 146 if additional plotting space is required.

#### D. EASE OF MODIFICATION

Both PSAP and PSAP1 are written to maintain as much generality as possible for ease of expansion and modification. Several FORTRAN statements, variables and subroutines are not used. They were left purposely unchanged. Although PSAP1 specifically reads ADINA and SAP IV data, it can easily be expanded to include any geometry and element data format. Simply study the read-in and storage methods (see Section II), and construct appropriate subroutines to read any particular format.

## II. PROGRAM ORGANIZATION AND DESCRIPTION OF OPERATION

### A. PSAP1 FLOW CHART


Figure 1 is a condensed flow chart of PSAP1. Probably the most important information given on this chart is the sequence in which the data cards, NAMELIST OPTION and NAMELIST PICT are read. Remember, when generating a sequence of plots, once a parameter has been defined, it retains that value until it is reassigned. Note that when KODE = 1 or 2, the original values of NAMELIST OPTION and NAMELIST PICT are retained until they are changed. However, when KODE = 3 a new title card, NAMELIST OPTION and a set of problem data are read. All variables in NAMELIST OPTION and NAMELIST PICT are assigned their default values. A new problem begins in this case. It is important that the last NAMELIST PICT to be read must contain the value of KODE = 0.

### B. NAMELISTS AND EULER ANGLES

#### 1. NAMELIST OPTION

Description and default values of NAMELIST OPTION are given in Appendix A. Basically NAMELIST OPTION variables pertain to the given problem: the number of nodes, geometry format, displacement format, space between plots, and paper size. Default values for NAMELIST OPTION are set, and NAMELIST OPTION is read at the beginning of the problem. Assigned values will remain until exit from the

Figure 1. Flow chart  
of program PSAP1

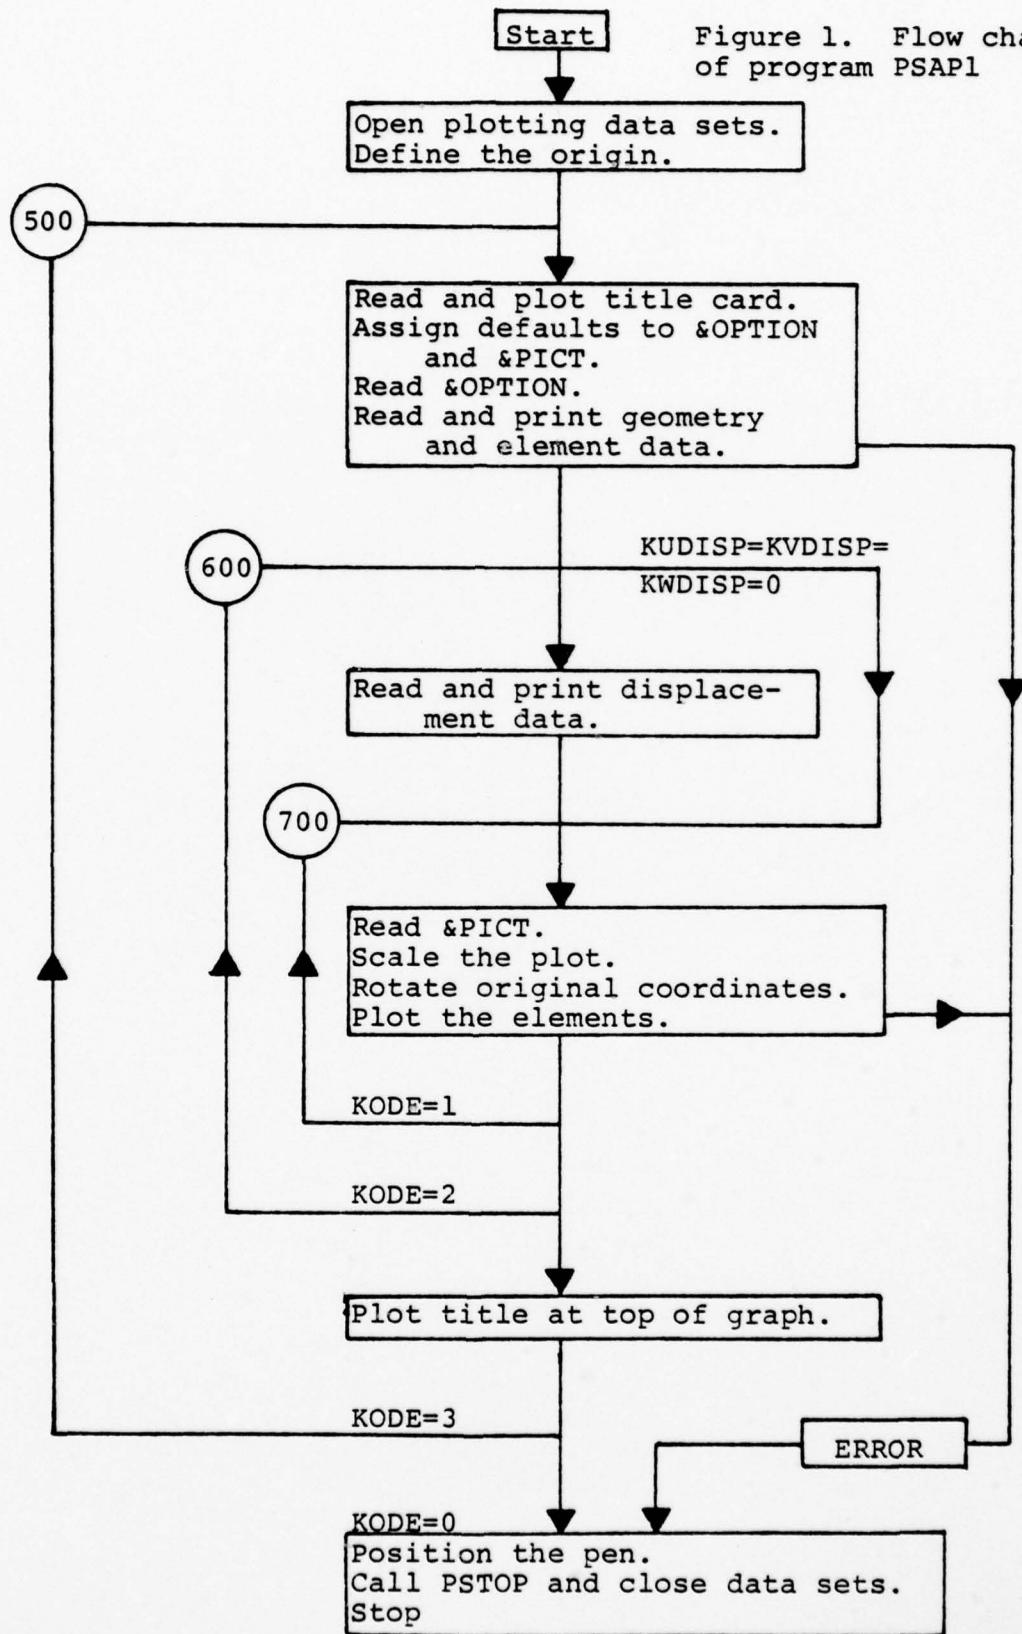

program (KODE = 0) or a new set of problem data is read (KODE = 3).

## 2. NAMELIST PICT

Like NAMELIST OPTION, NAMELIST PICT variable descriptions and default values are given in Appendix A. Basically NAMELIST PICT variables pertain to a given plot. One NAMELIST OPTION may apply to several successive plots, but each NAMELIST PICT defines a unique plot. That plot may include the whole model, part of the model and any options defined in NAMELIST PICT. NAMELIST PICT also specifies the viewing plane through the Euler angles (figure 18, Appendix A).

### a. Oblique Orthographic Projections (Euler Angles)

An example of an oblique orthographic projection of a finite element model is given in figure 18 in Appendix A. The model can be viewed in any selected orientation. Euler angle transformations are used to specify orientation of the model to be projected. As described in reference 4, this transformation resolves the coordinate system of the model to a principal viewing plane (i.e.,  $X_OY_O$ ,  $X_OZ_O$ ,  $Y_OZ_O$ ) on which the display is to be plotted. Prior to rotation, the model coordinate system ( $X, Y, Z$ ) is coincident with the coordinate system containing the viewing planes ( $X_O, Y_O, Z_O$ ). The viewing planes are fixed, and the model is rotated about its model coordinate system. The rotations ( $\psi, \theta, \phi$ ) of the body about the model axes ( $X, Y, Z$ ) are shown in figure 18, Appendix A. The NAMELIST PICT variables KHORZ (horizontal

axis), KVERT (vertical axis), PSI ( $\psi$ ), THETA ( $\theta$ ), and PHI ( $\phi$ ) specify the viewing plane and Euler angles. The order of the Euler angle rotations must be PSI, THETA and then PHI. Mathematical transformations are:

$$\begin{Bmatrix} x_o \\ y_o \\ z_o \end{Bmatrix} = [\underline{A}_\phi] [\underline{A}_\theta] [\underline{A}_\psi] \begin{Bmatrix} x \\ y \\ z \end{Bmatrix}$$

$$[\underline{A}_\psi] = \begin{bmatrix} \cos \psi & -\sin \psi & 0 \\ \sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$[\underline{A}_\theta] = \begin{bmatrix} \cos \theta & 0 & \sin \theta \\ 0 & 1 & 0 \\ -\sin \theta & 0 & \cos \theta \end{bmatrix}$$

$$[\underline{A}_\phi] = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \phi & -\sin \phi \\ 0 & \sin \phi & \cos \phi \end{bmatrix}$$

SUBROUTINE ROTAT calculates the transformation matrices for every NAMELIST PICT, except if ISCALE = 0. ISCALE = 0 directs the scale of the plot to be the same as that of the

previous plot. Should a rotation occur with ISCALE = 0, the plot width could exceed the paper width.

b. Scaling

The safest scaling method is automatic scaling (ISCALE = 1). The user may specify a scale (ISCALE = 2) and the plot origin (XORGN,YORGN), but one must be careful not to run the plotting pen off the graph paper. ISCALE = 0 is a very useful option. The plot will use the same scale as the previous plot. It is useful in an assembly graph where examination of a mesh in sections without losing perspective is desired. Example 3, Section III, illustrates the option ISCALE = 0. When ISCALE = 1 in a NAMELIST PICT defining a partial plot, a "blow-up" of that section is obtained. ISCALE cannot be zero in the first NAMELIST PICT.

c. Partial Plots

To develop a partial plot, three methods of segregating elements exist: first, by the X, Y, and Z cutting planes; second, by node numbers, and, third, by element numbers. If a model has an area where the elements are relatively small, a "blow-up" may be desired. Choose a numbering scheme or coordinates to define the section to be segregated using one of the methods above. Example 3 (figure 14, Section III) uses X, Y, and Z cutting planes to define the partial plots. Example 4 (figure 17, Section III) uses element numbers to section the plots.

### C. NODAL POINT (GEOMETRY) INFORMATION READ-IN

Nodal point data is read in by the GEOM<sub>n</sub> subroutines (GEOM1, GEOM2, and GEOM9, see figure 2). Since SAP IV and ADINA data decks are similar, SUBROUTINES GEOM1 and GEOM9 are also very similar. They are both constructed to read and generate data in exactly the same way as ADINA and SAP IV. All data not needed by PSAP1 is disregarded and the nodal point data is stored in array ZZZ (figure 3). After studying storage array ZZZ and GEOM1 (or GEOM9), a user moderately familiar with FORTRAN programming could easily construct a user supplied subroutine (GEOM2) to read the nodal point data in any desired format.

### D. ELEMENT (CONNECTIVITY) INFORMATION READ-IN

After reading and storing the nodal point data, the element data must be read. The GEOM<sub>n</sub> subroutine will read the element control card (NPAR, references 1 and 2). SUBROUTINE ELTYPE (figure 2) calls the proper element subroutine to read the element data specified on the element control card. If several groups of elements are to be read, the process is repeated until all of the element groups have been read. Although the nodal point data is stored in array ZZZ, the element connectivity is read and stored on device 10 (disk).

### E. DISPLACEMENT DATA READ-IN FOR DISPLACEMENT POSTPROCESSING

Displacement data may be read in (figure 1) by SUBROUTINE DATA9 (KDATA=9) or SUBROUTINES DATA1 or DATA5 (user supplied,

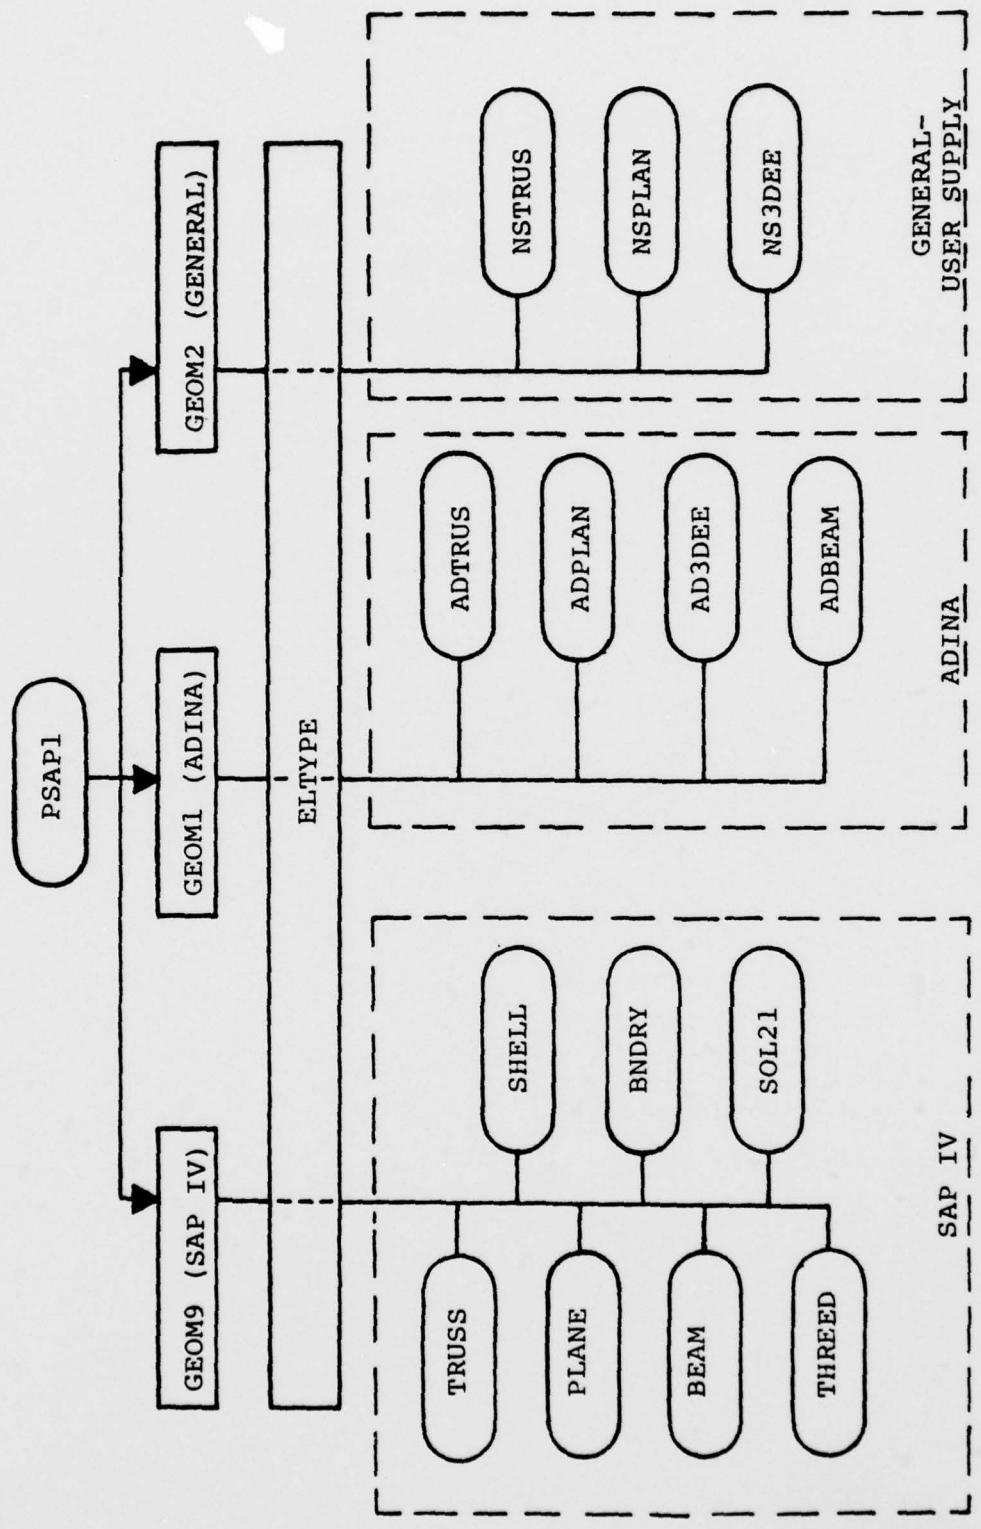


Figure 2. Flow chart for reading geometry and element connectivity data.

$$\begin{bmatrix} zzz(1) & zzz(N+1) & zzz(2N+1) & zzz(3N+1) & zzz(4N+1) & zzz(5N+1) & zzz(6N+1) \\ zzz(2) & zzz(N+2) & zzz(2N+2) & zzz(3N+2) & zzz(4N+2) & zzz(5N+2) & zzz(6N+2) \\ " & " & " & " & " & " & " \\ " & " & " & " & " & " & " \\ zzz(N) & zzz(2N) & zzz(3N) & zzz(4N) & zzz(5N) & zzz(6N) & zzz(7N) \end{bmatrix}$$

(a)

$$\begin{bmatrix} NUMPT(1) & XPT(1) & YPT(1) & ZPT(1) & UPT(1) & VPT(1) & WPT(1) \\ NUMPT(2) & XPT(2) & YPT(2) & ZPT(2) & UPT(2) & VPT(2) & WPT(2) \\ " & " & " & " & " & " & " \\ " & " & " & " & " & " & " \\ NUMPT(N) & XPT(N) & YPT(N) & ZPT(N) & UPT(N) & VPT(N) & WPT(N) \end{bmatrix}$$

(b)

$$\begin{bmatrix} 1 & X1 & Y1 & Z1 & U1 & V1 & W1 \\ 2 & X2 & Y2 & Z2 & U2 & V2 & W2 \\ " & " & " & " & " & " & " \\ " & " & " & " & " & " & " \\ N & XN & YN &ZN & UN & VN & WN \end{bmatrix}$$

(c)

Figure 3. Nodal point and displacement storage arrays.  
 $N =$  The number of nodes. (a) Array in subroutine PSAP1.  
 (b) Arrays in subroutines called by PSAP1. (c) Nodal coordinates and displacements in (a) and (b).

KDATA = 1 or 5). When read, displacement data is stored in the last three columns of array ZZZ (figure 3). PSAP1 can postprocess displacements for both ADINA and SAP IV. The difficulty comes in obtaining a punched deck of cards. Reference 6 gives a description of how to obtain a deck of cards for SAP IV in a format acceptable to SUBROUTINE DATA9. ADINA has no such provision. However, when preprocessing, the displacement data will be omitted (NUDISP=NVDISP=NWDISP=0), and this step will be by-passed.

#### F. PLOTTING LOGIC

SUBROUTINE PLOTX (figure 4) is the main plotting routine. Since the nodal point data is stored in array ZZZ and the connectivity is stored on device 10, it is a simple matter to read the connectivity from device 10 (one element at a time), and connect the nodes as they are defined in references 1 and 2. For example, NEND = number of nodes defining the connectivity of a single element, NUMEL = the element number and NODE(NEND) is the array containing the connectivity. Device 10 contains this information successively for each element. The statement

```
READ(10) NEND,NUMEL,(NODE(I),I=1,NEND)
```

will read the element connectivity to be plotted. The 8-20 node brick (ADINA and SAP IV) and the 4-8 node plane elements (ADINA) may have 3 points defining each edge. If the midpoint node is defined, then isoparametric

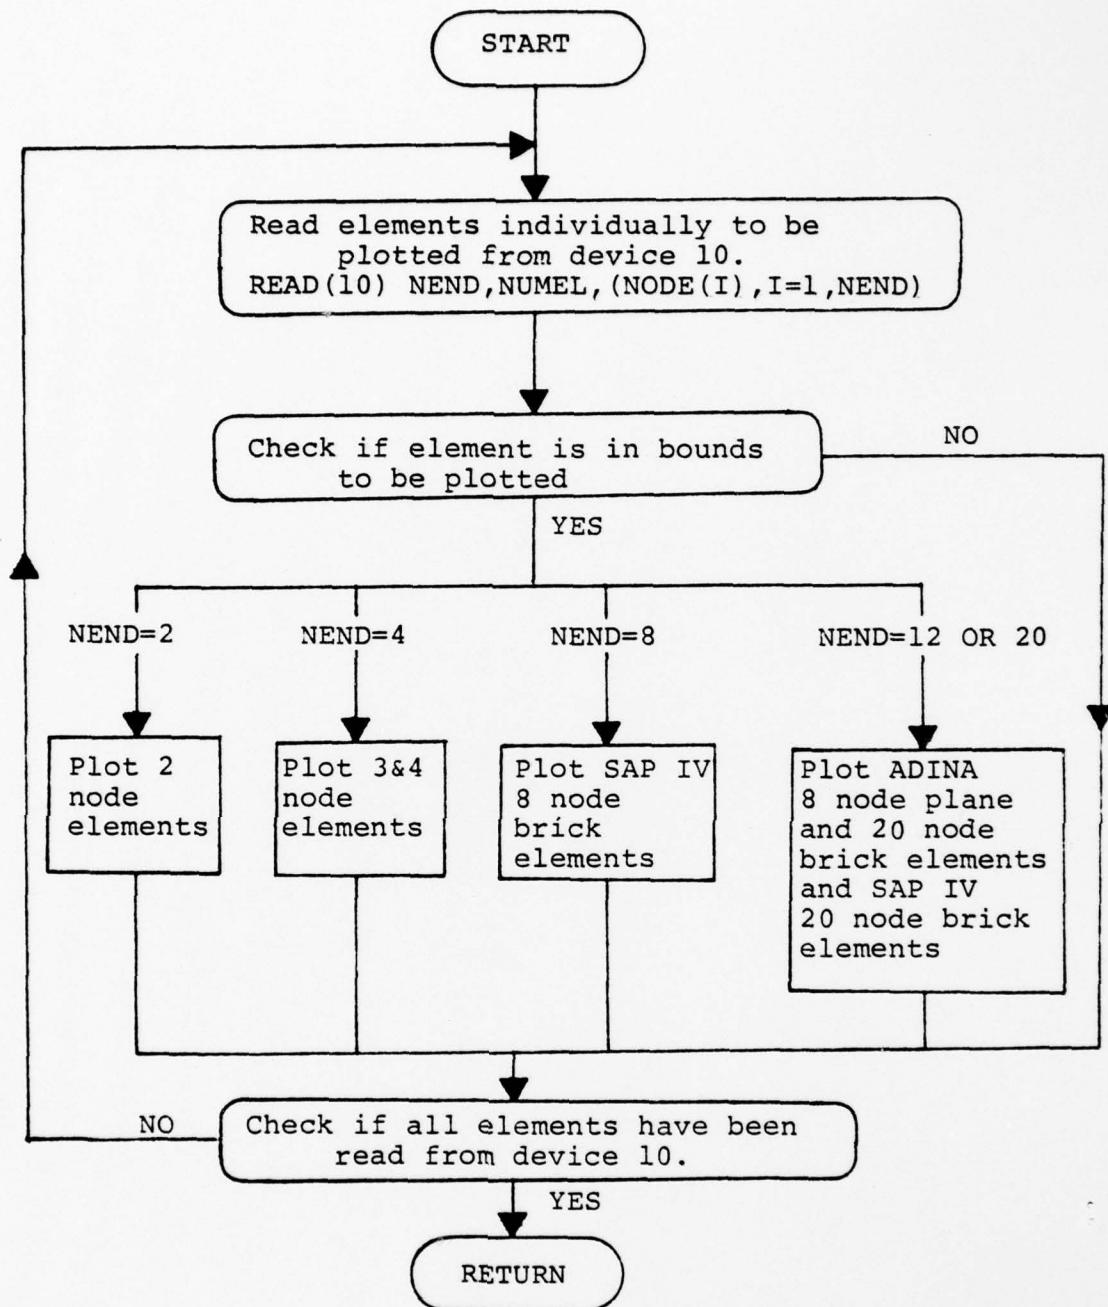


Figure 4. Flow chart for PSAP1 plotting subroutine, PLOTX. Array NODE contains the connectivity of the element being plotted. NEND = the number of nodes defining the connectivity of a single element. NUMEL = the element number.

shape functions (reference 3) are used to interpolate along the three-node edges. These shape functions are identical to those used by ADINA and SAP IV, so the geometry represented graphically is identical to the problem solved in ADINA and SAP IV. SUBROUTINE CURVE does the interpolation with the following equations:

$$x_o = N1 * x_{01} + N2 * x_{02} + N3 * x_{03}$$

$$y_o = N1 * y_{01} + N2 * y_{02} + N3 * y_{03}$$

$$N1 = S * (S - 1.0) / 2.0$$

$$N2 = - (S + 1.0) * (S - 1.0)$$

$$N3 = S * (S + 1.0) / 2.0$$

$$-1.0 \leq S \leq 1.0$$

PSAP1 uses the NPS plotting package [reference 5] subroutines.


### III. PSAP1 SAMPLE PROBLEMS

The following examples have been chosen to illustrate some of the most useful options of PSAP1. Prior to attempting to use PSAP1, the user should have the problem defined and the cards punched in the format of references 1 and 2. Appendix A of this thesis gives a complete description of deck preparation for PSAP1 here at NPS. This section should prove helpful in the understanding and interpretation of the options presented in Appendix A.


#### A. ADINA EXAMPLES

##### 1. Reinforced Concrete Beam (example 1, figure 5)

This example was chosen because it illustrates the importance of the exploded plot when more than one element group is used. It is taken from the ADINA manual [reference 1]. Figure 6 is a listing of the data cards as they are prepared for ADINA. Figure 7 indicates how that deck would be modified for PSAP1. Note: load cards are removed, NAMELIST OPTION and NAMELIST PICT are added, and the title to be plotted on the graph is added in figure 7. Otherwise, figures 6 and 7 are the same. Figure 8, part (a), illustrates an undistorted ( $KDISP = 0$ ) PSAP1 plot with the nodes numbered ( $NOTAT = 1$ ). Figure 8, part (b), shows the same mesh in an exploded form ( $KDISP = 2$ ) with the elements numbered ( $NOTAT = 2$ ). Note how the truss elements are visible in the exploded plot.

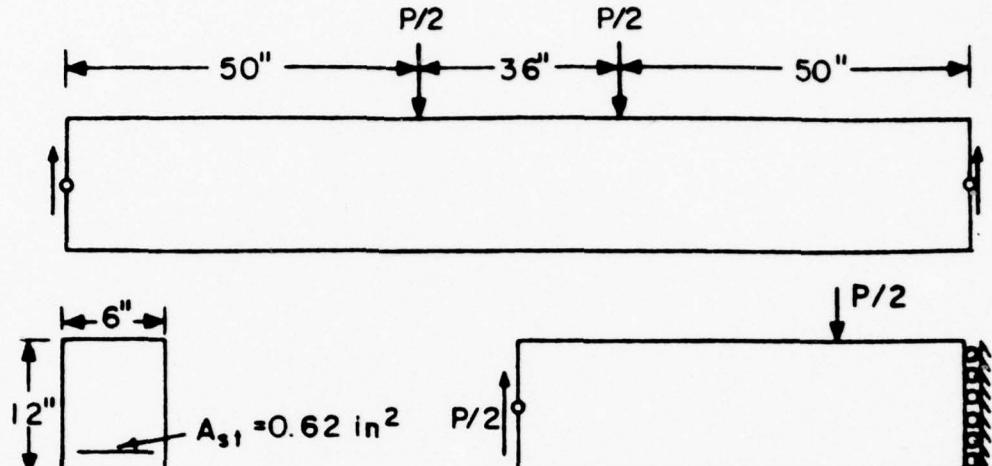

BEAM DIMENSIONS

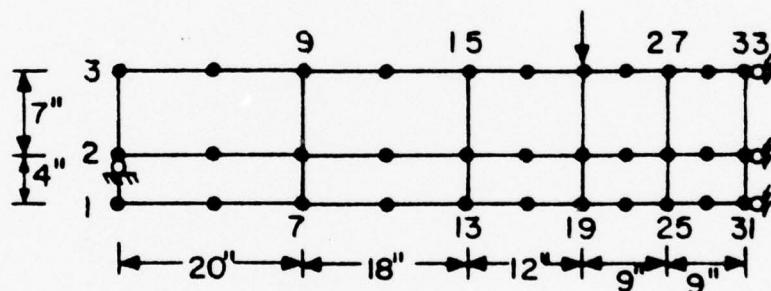

FINITE ELEMENT IDEALIZATION

MATERIAL PROPERTIES:

$$\sigma_c = 3740 \text{ psi}$$

$$\sigma_i = 458 \text{ psi}$$

$$\sigma_{y\text{ steel}} = 44000 \text{ psi}$$

$$E_{o\text{ concrete}} = 6100 \text{ ksi}$$

$$\nu = 0.2$$

$$E_{\text{steel}} = 30000 \text{ ksi}$$

$$E_{t\text{ steel}} = 300 \text{ ksi}$$

Figure 5. Example 1, ADINA truss and 8 node plane elements, Reinforced Concrete Beam (Given on page 84, reference 2).

NONLINEAR ANALYSIS OF A REINFORCED CONCRETE BEAM  
\*\*\*\*\* TITLE CARD ADINA EXAMPLE

|                                   |   |    | MASTER CONTROL CARDS                   |                    |     |
|-----------------------------------|---|----|--|--------------------|-----|
| 33100111      0      2      *** 1 |   |    | 2 BLANK CARD<br>BLANK CARD             |                    |     |
| 25                                |   |    | BLANK CARD<br>BLANK CARD<br>BLANK CARD |                    |     |
| *****                             |   |    | NODAL POINT DATA                       |                    |     |
| 1                                 | 0 | 0  | 1                                      | 1                  | 0.  |
| 4                                 | 0 | 0  | 1                                      | 1                  | 10. |
| 7                                 | 0 | 0  | 1                                      | 1                  | 20. |
| 13                                | 0 | 0  | 1                                      | 1                  | 38. |
| 25                                | 0 | 0  | 1                                      | 1                  | 50. |
| 31                                | 0 | 1  | 0                                      | 1                  | 59. |
| 2                                 | 1 | 1  | 1                                      | 1                  | 68. |
| 5                                 | 1 | 1  | 1                                      | 1                  | 0.  |
| 8                                 | 1 | 1  | 0                                      | 1                  | 10. |
| 14                                | 1 | 1  | 0                                      | 1                  | 4.  |
| 20                                | 1 | 1  | 0                                      | 1                  | 4.  |
| 26                                | 1 | 1  | 0                                      | 1                  | 3.  |
| 32                                | 1 | 1  | 0                                      | 1                  | 4.  |
| 3                                 | 1 | 1  | 0                                      | 1                  | 4.  |
| 9                                 | 1 | 1  | 0                                      | 1                  | 11. |
| 15                                | 1 | 1  | 0                                      | 1                  | 3.  |
| 21                                | 1 | 1  | 0                                      | 1                  | 11. |
| 27                                | 1 | 1  | 0                                      | 1                  | 3.  |
| 33                                | 1 | 1  | 0                                      | 1                  | 11. |
| 1                                 | 1 | 20 | *****                                  | LOAD CONTROL CARD  |     |
| 1                                 |   |    | *****                                  | INITIAL CONDITIONS |     |

Figure 6. Example 1, ADINA input deck listing, page 1 of 2.

\*\*\*\*\* Not part of input deck.

| TRUSS ELEMENT INPUT        |                         |                   | CONTINUUM ELEMENT INPUT |                       |  |
|----------------------------|-------------------------|-------------------|-------------------------|-----------------------|--|
|                            |                         |                   |                         |                       |  |
| 1 10 1 0                   | ****                    |                   | 3 1 3                   |                       |  |
| 0.620 .000733863 0.300.    | 44.0                    |                   | 1 0 0.                  |                       |  |
| 30.000 1 1 0               | 28 31                   | ****              | 1 1 0.                  |                       |  |
| 2 16 1 0 000217164         | 0                       | 2 ****            | 6 20                    | 5 1 0 0 0             |  |
| 610.0 0.1058               | -3.74                   |                   | CONTINUUM ELEMENT INPUT |                       |  |
| 8 2 6 2 6 2 6 9 10 33      | 1 1 1 25 1 2 1 26 27    | 0.002             | 0.0005                  | 0.50                  |  |
| 5 2 6 3 6 6 6 26           | 1 1 1 31 1 8 1 32       | 1 5 6 29 6 6 0 30 | 0 4 0 28 5 0 29 0       | 6. 6. 6. 0 6. 6. 0 6. |  |
| 1 9 0 8 0 8 1 3 1          | 0 0 0 0 0 0 0 0 0       | APPLIED LOAD DATA |                         |                       |  |
| 0.4.0 8.0 8.0 1.5 1.5 -0.5 | 1.0 3.2 5.0 2.0 6.0 4.8 | 11.0 7.0 6.0 12.5 | 6.4                     |                       |  |

Figure 6. Example 1, ADINA input deck listing, page 2 of 2.

\*\*\*\* Not part of input deck.



```

1             INITIAL CONDITIONS
1   10   1   0
1   1   0.620  .000733863 0.300
0.000.  .440   1   0.
1C 1C 28   31   1   0.

2   1C 1C 1C 1C 1C 1C
2   1C 000217164 0
6 1C 000.  0.20
0.458  -3.74
1 1 1 1 1 1 1 1
8 2 6 2 6 2 6 2 6
5 3 6 3 6 3 6 3 6
32 1 1 1 1 1 1 1 1
9 3 2 3 2 3 2 3 2
10 6 1 6 1 6 1 6 1
33 27 26 32 30 0 29 0
               TRUSS ELEMENTS
              3   1   3
               3 2D CONTINUUM ELEMENT INPUT
               0 5   1   0   0   0
               0 0 005 0.50
               0 4   0   6.
               0 28 0   6.
               0 5   0   6.
               0 29 0   6.

***** APPLIED LOAD DATA IS REMOVED
***** NAMELIST PICT (UNDEFORMED STRUCTURE)
***** NAMELIST PICT (EXPLoded PLOT)

EPICT
KHDRZ=2,
KVFRZ=2,
NOTAT=1,
PLOTSZ=8.75,
KCDE=1,
EFND
***** NAMELIST PICT (EXPLoded PLOT)

EPICT
DMAGS=0.7,
KDISP=2,
KCDE=0,
NCAT=2,
PLOTSZ=9.0,
EFND
***** Not part of input deck


```

Figure 7. Example 1, PSAP1 input deck listing, page 2 of 2.

|   |   | 9 |   |  | 12 |    |  | 15 |    |  | 18 |  |  | 21 |  |    | 24 |    |  | 27 |  |    | 30 |  |  | 33 |  |  |
|---|---|---|---|--|----|----|--|----|----|--|----|--|--|----|--|----|----|----|--|----|--|----|----|--|--|----|--|--|
| 2 | 5 |   | 8 |  |    | 11 |  |    | 14 |  | 17 |  |  | 20 |  | 23 |    | 26 |  | 29 |  | 32 |    |  |  |    |  |  |
| 1 | 4 |   | 7 |  |    | 10 |  |    | 13 |  | 16 |  |  | 19 |  | 22 |    | 25 |  | 28 |  | 31 |    |  |  |    |  |  |

(a) Undefomed structure (KDISP=0) , nodes numbered (NOTAT=1) .

Figure 8. Example 1, PSAPI output graphs, page 1 of 2.

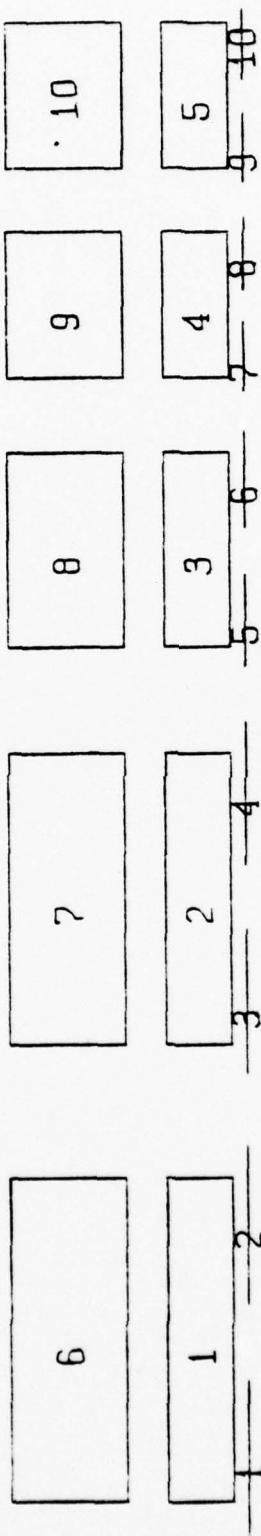

(b) Exploded plot (KDISP=2), elements numbered (NOTAT=2).

Figure 8. Continued, page 2 of 2.

2. Flat Plate With Hole (example 2, figure 9)

This is a well known problem with which one can calculate the stress concentration on a hole in a plate under axial tension. Figure 10 is a listing of the PSAP1 deck set-up. The mesh is composed of ADINA variable 4-8 node plane elements. Notice on figure 11, parts (a) and (b), how the interpolating shape functions round off the 3-node edges. Part (a) has the nodes numbered (NOTAT = 1). Part (b) has the elements numbered (NOTAT = 2), and illustrates the use of the symmetry option (KSYMXY=KSYMZX=1). The symmetry option enables one to obtain a picture of the complete plate even though the model only consisted of a quarter plate with proper boundary conditions.

B. SAP IV EXAMPLES

1. SAP IV Truss Problem (example 3, figure 12)

Figure 13 is a listing of the PSAP1 data deck. Figure 14 indicates how multiple partial plots can be used to obtain a better representation of the model. Part (a) of figure 14 is the complete model. Part (b) is the left half (XXMAX = 50'), and part (c) is the right half (XXMIN = 50', XXMAX = 1.0E20'). Notice also that for Parts (b) and (c), ISCALE = 0, which means succeeding plots have the same scale as the first. Had ISCALE equaled 1 (blow-up), then the width of the half view would have been the same as the complete model. Figure 14 size is limited by the NAMELIST PICT variable PLOTSZ.

Figure 9. Example 2, flat plate with a hole in tension. ADINA 4-8 node plane element.

Thickness = 1 inch

Young's modulus =  $30.0 \times 10^6$  psi


Poisson's ratio = .333

Total elements = 18

Total nodes = 44

Distributed Load =

1000.0 psi

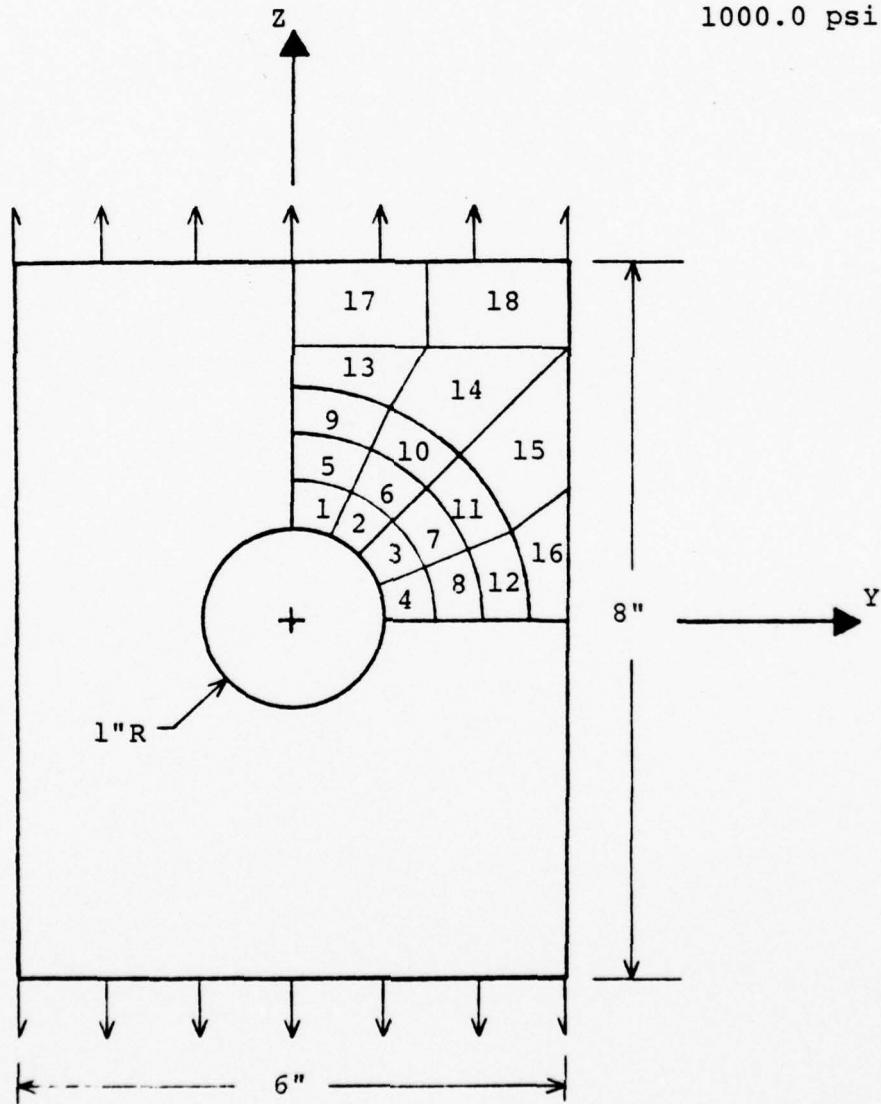



| INITIAL CONDITIONS |    |    |    |       |   |                            |   |    |     |
|--------------------|----|----|----|-------|---|----------------------------|---|----|-----|
| LOAD CONTROL CARD  |    |    |    |       |   |                            |   |    |     |
| *****              |    |    |    |       |   |                            |   |    |     |
| 3                  | 1  | 2  | 0  | ***** | 6 | 2D CONTINUUM ELEMENT INPUT | 0 | 1  | 1   |
| 0                  | 1  | 0  | 1  | 0     | 1 | 0                          | 0 | 0  | 0   |
| 38                 | 1  | 0  | 0  | 1     | 1 | 1                          | 1 | 1  | 1.5 |
| 39                 | 1  | 0  | 0  | 1     | 1 | 1                          | 1 | 1  | 3.0 |
| 40                 | 1  | 0  | 0  | 1     | 1 | 1                          | 1 | 1  | 3.0 |
| 41                 | 1  | 1  | 0  | 1     | 1 | 1                          | 1 | 1  | 1.5 |
| 42                 | 1  | 1  | 0  | 1     | 1 | 1                          | 1 | 1  | 0.0 |
| 43                 | 1  | 0  | 0  | 1     | 1 | 1                          | 1 | 1  | 0.0 |
| 44                 | 1  | 0  | 0  | 1     | 1 | 1                          | 1 | 1  | 4.0 |
| 3                  | 1  | 2  | 0  | ***** | 6 | 2D CONTINUUM ELEMENT INPUT | 0 | 1  | 1   |
| 0                  | 1  | 0  | 1  | 0     | 1 | 0                          | 0 | 0  | 0   |
| 2                  | 18 | 0  | 0  | 2     | 6 | 2D CONTINUUM ELEMENT INPUT | 0 | 1  | 1   |
| 1                  | 18 | 0  | 0  | 333   | 1 | 2                          | 0 | 11 | 0   |
| 30.0E06            | 6  | 12 | 10 | 1     | 1 | 2                          | 0 | 11 | 1.0 |
| 1                  | 3  | 12 | 10 | 1     | 1 | 2                          | 0 | 11 | 0   |
| 4                  | 6  | 14 | 11 | 1     | 1 | 8                          | 0 | 17 | 1.0 |
| 5                  | 7  | 18 | 16 | 1     | 1 | 2                          | 0 | 17 | 0   |
| 10                 | 12 | 21 | 19 | 1     | 1 | 11                         | 0 | 20 | 1.0 |
| 8                  | 16 | 21 | 19 | 1     | 1 | 11                         | 0 | 20 | 0   |
| 16                 | 18 | 27 | 25 | 1     | 1 | 17                         | 0 | 26 | 0   |
| 9                  | 16 | 21 | 21 | 1     | 1 | 2                          | 0 | 26 | 0   |
| 19                 | 21 | 30 | 28 | 1     | 1 | 20                         | 0 | 29 | 1.0 |
| 12                 | 26 | 31 | 29 | 1     | 1 | 20                         | 0 | 29 | 0   |
| 25                 | 27 | 36 | 34 | 1     | 1 | 26                         | 0 | 35 | 1.0 |
| 13                 | 25 | 31 | 31 | 1     | 1 | 26                         | 0 | 35 | 0   |
| 28                 | 30 | 38 | 37 | 1     | 1 | 29                         | 0 | 35 | 1.0 |
| 14                 | 25 | 31 | 31 | 1     | 1 | 29                         | 0 | 35 | 0   |
| 30                 | 32 | 39 | 38 | 1     | 1 | 31                         | 0 | 35 | 1.0 |
| 15                 | 35 | 31 | 38 | 1     | 1 | 31                         | 0 | 35 | 0   |
| 32                 | 34 | 40 | 39 | 1     | 1 | 33                         | 0 | 35 | 1.0 |
| 16                 | 35 | 41 | 41 | 1     | 1 | 40                         | 0 | 35 | 0   |
| 34                 | 36 | 41 | 41 | 1     | 1 | 40                         | 0 | 35 | 1.0 |
| 17                 | 37 | 38 | 43 | 1     | 1 | 42                         | 0 | 35 | 0   |
| 18                 | 38 | 44 | 41 | 1     | 1 | 42                         | 0 | 35 | 1.0 |
| 39                 | 39 | 44 | 44 | 1     | 1 | 43                         | 0 | 35 | 0   |

Figure 10. Example 2, PSAP1 input deck listing, page 2 of 3.

\*\*\*\*\* Not part of input deck.

```

*****          APPLIED LOAD DATA IS REMOVED
*****          NAMELIST PICT (ACTUAL STRUCTURE)

&PICT
KHCZRZ=2,
KVERT=2,
NOTAT=1,
PLOTSZ=7.6,
ISCALE=1,
KODE=2,
END

*****          NAMELIST PICT (SYMMETRIC REPRESENTATION)


&PICT
PLOTSZ=8.0
NOTAT=2,
KSYMXZ=1,
KSYMY=1,
KODE=0,
END

```

Figure 10. Example 2, PSAP1 input deck listing, page 3 of 3.


\*\*\*\*\* Not part of input deck.

Figure 11. Example 2, PSAP1 output graphs, page 1 of 2.

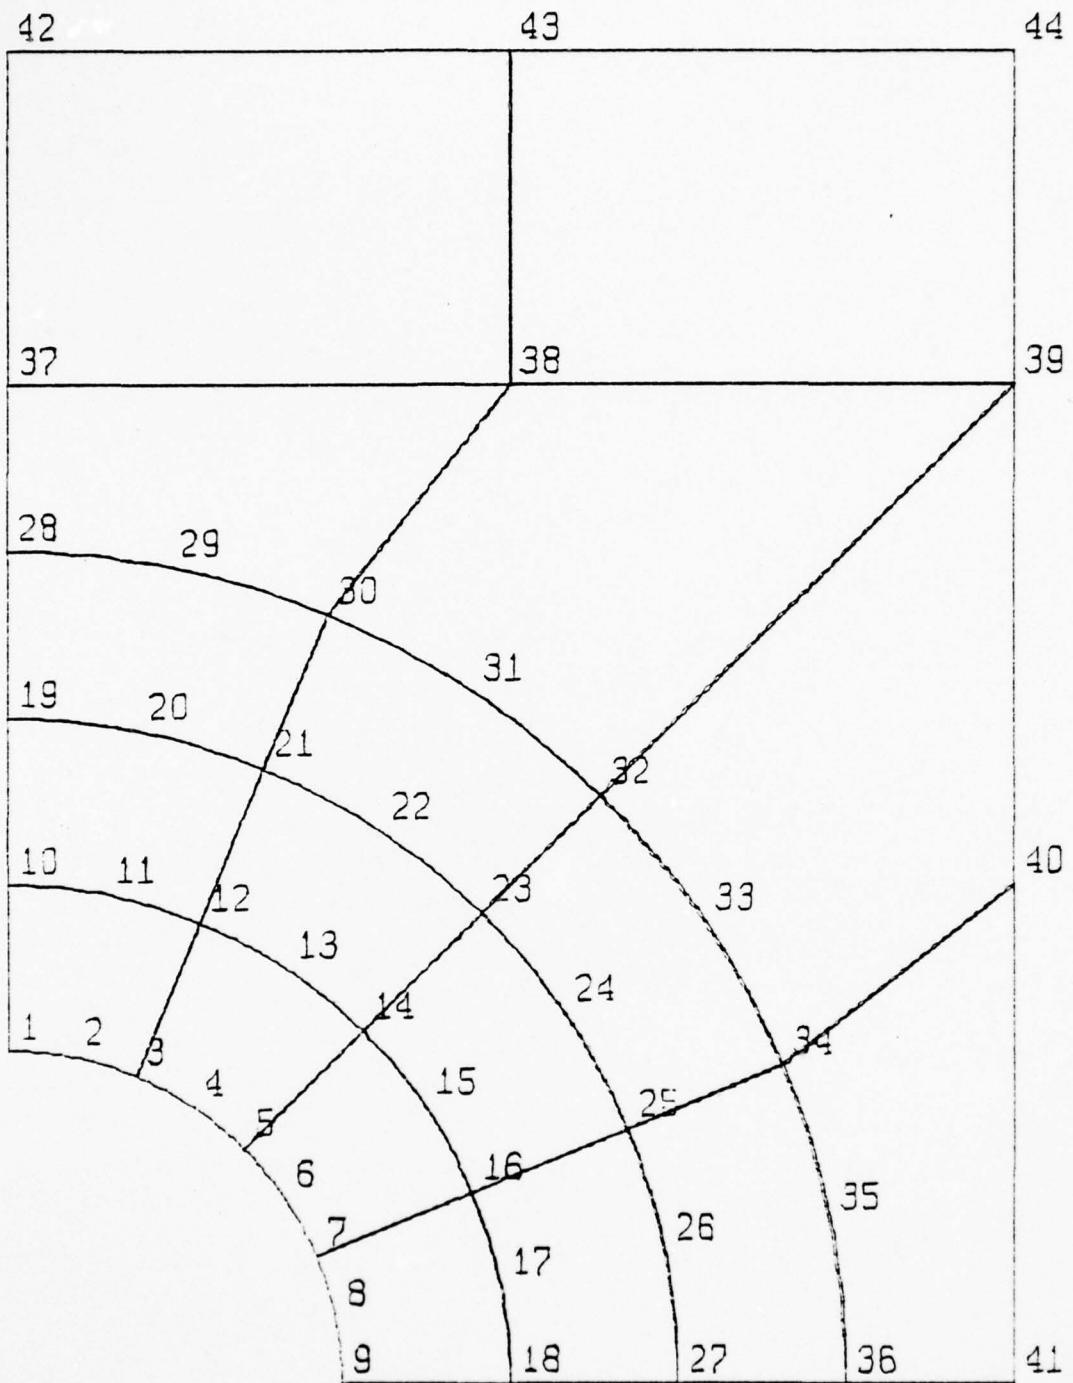


(a) Actual mesh, nodes numbered.

Figure 11. Continued, page 2 of 2.

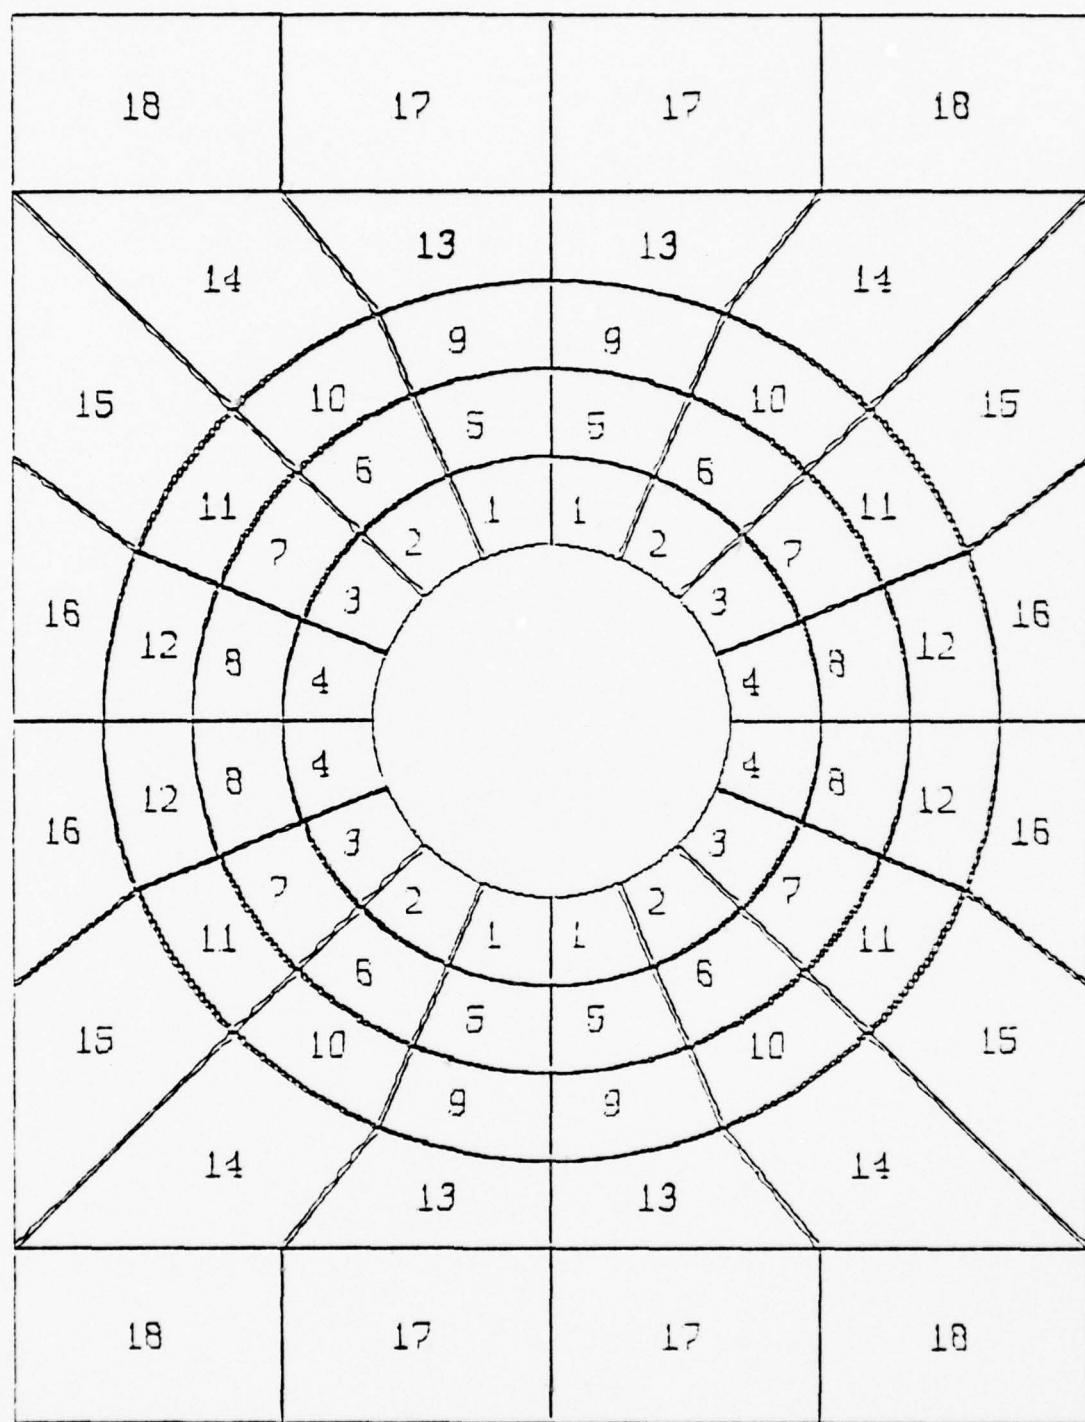

(b) Symmetric representation, elements numbered.

Figure 12. Example 3,  
SAP IV truss element  
problem.

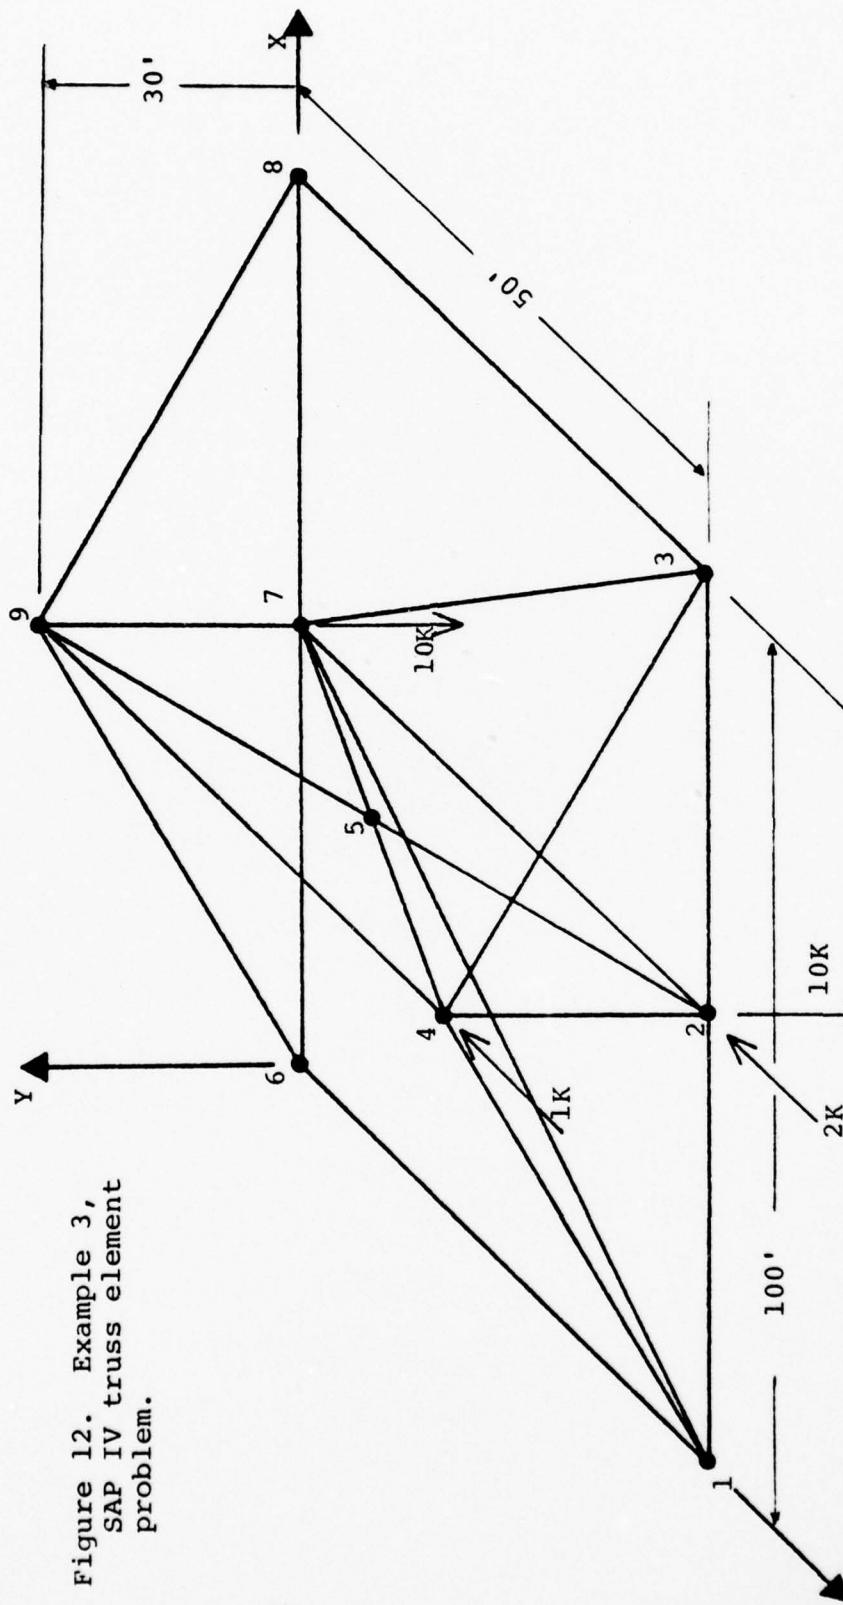

| NODE       | BOUNDARY CONDITIONS      |
|------------|--------------------------|
| 1          | X fixed, Y free, Z free  |
| 3          | X free, Y fixed, Z free  |
| 6          | X fixed, Y free, Z fixed |
| 8          | X free, Y fixed, Z fixed |
| All others | are free.                |

Young's modulus =  $4.32 \times 10^9$  LB/SQFT  
Cross-sectional area =  $7.0 \times 10^{-2}$  SQFT  
Weight density =  $4.89 \times 10^2$  LB/SQFT

KIBLER AE SAP IV TRUSS \*\*\*\*\* PSAP1 TITLE TO BE PLOTTED CN GRAPH

\*\*\*\*\* NAMELIST OPTION

COFFICN  
YSPACE=C.25,  
SEND

PSAP SAMPLE TRUSS \*\*\*\*\* TITLE CARD FOR SAP IV EXAMPLE

\*\*\*\*\* PROBLEM WITH INNER ELEMENTS  
MASTER CONTROL CARD

| S  | 1       | 1 | 0       | 0       | NODAL POINT DATA                           | 0.0     | 50.0    | 70.0 |
|----|---------|---|---------|---------|--|---------|---------|------|
| 1  | 1       | 0 | 0       | 1       | 1  | 50.0    | 0.0     | 50.0 |
| 2  | 0       | 0 | 1       | 1       | 1  | 100.0   | 0.0     | 70.0 |
| 3  | 0       | 0 | 0       | 1       | 1  | 50.0    | 30.0    | 70.0 |
| 4  | 0       | 0 | 0       | 1       | 1  | 50.0    | 15.0    | 25.0 |
| 5  | 0       | 0 | 1       | 1       | 1  | 0.0     | 0.0     | 70.0 |
| 6  | 1       | 1 | 1       | 1       | 1  | 50.0    | 0.0     | 0.0  |
| 7  | 0       | 0 | 1       | 1       | 1  | 100.0   | 0.0     | 70.0 |
| 8  | 0       | 0 | 1       | 0       | 1  | 50.0    | 30.0    | 70.0 |
| 9  | 0       | 0 | 0       | 0       | 1  | 0.0     | 0.0     | 0.0  |
| 10 | 20      | 1 | 6.5E-09 | 6.5E-09 | ***** THREE DIMENSIONAL TRUSS ELEMENT DATA |         |         |      |
| 11 | 4.32E09 | 1 | 6.5E-09 | 6.5E-09 | J  | 7.0E-02 | 4.89E02 |      |
| 12 | 1       | 2 | 1       | 1       |  | 70.0    |         |      |
| 13 | 2       | 3 | 1       | 1       |  | 70.0    |         |      |
| 14 | 1       | 4 | 1       | 1       |  | 70.0    |         |      |
| 15 | 2       | 4 | 1       | 1       |  | 70.0    |         |      |
| 16 | 3       | 4 | 1       | 1       |  | 70.0    |         |      |
| 17 | 1       | 6 | 1       | 1       |  | 70.0    |         |      |
| 18 | 7       | 1 | 1       | 1       |  | 70.0    |         |      |
| 19 | 2       | 7 | 1       | 1       |  | 70.0    |         |      |
| 20 | 3       | 7 | 1       | 1       |  | 70.0    |         |      |

Figure 13. Example 3, PSAP1 input deck 1 listing, page 1 of 2.

\*\*\*\*\* Not part of input deck.

```

10
11 70.0
12 70.0
13 70.0
14 70.0
15 70.0
16 70.0
17 70.0
18 70.0
19 70.0
20 70.0

3 85 5 97 9 7 8 9 9
4 4 5 6 7 6 7 6 7 8

***** LOAD, LOAD CASE MULTIPLIER AND DYNAMIC ANALYSIS
***** CARDS REMOVED
***** NAMELIST PICT FOR TCTAL MESH

EPICT
KHCRZ=1,
KVERT=2,
PSI=-25.0,
PH1=25.0,
THETA=-40.0,
PLCTS2=4.5,
NCTAT=1,
KODE=1,
EEND

***** NAMELIST PICT (LEFT HAND SIDE)

EPICT
XXMAX=50.0,
ISCALE=C,
GENC

***** NAMELIST PICT (RIGHT HAND SIDE)


EPICT
XXMAX=1.0E2,
XXIN=50.0,
KODE=C,
GENC

```

Figure 13. Example 3, PSAPI input deck listing, page 2 of 2.


\*\*\*\*\* Not part of input deck.

Figure 14. Example 3, PSAP1 output graphs.

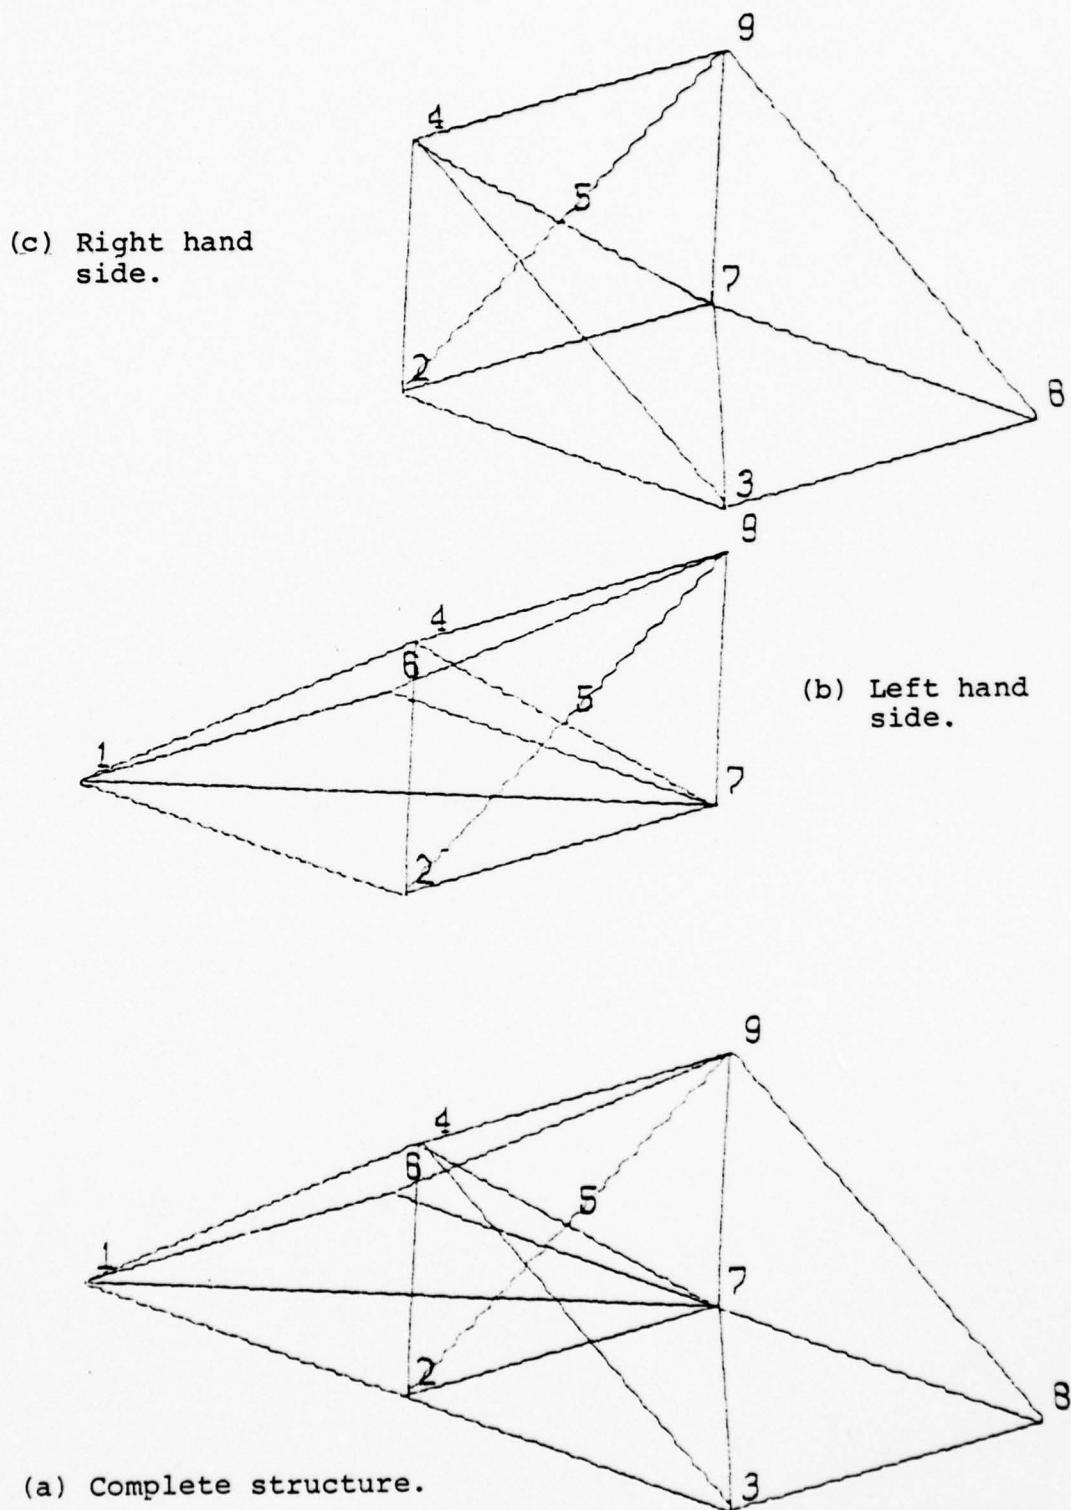

. 2. Cylindrical Bar With Spherical Hole (example 4,  
figure 15)

This mesh could have several uses. Two might be to calculate stress concentrations if the bar is under axial load or to calculate loading if the void is under pressure (i.e., dispersed nuclear fuel pellet). Figure 16 is a listing of the PSAP1 data deck. Figure 17, part (a), is a representation of the complete model. Parts (b), (c), (d), and (e) of figure 17 are partial plots of the total structure using options of the undeformed structure (KDISP = 0) with node numbering (NOTAT = 1), and the exploded plot (KDISP = 2) with element numbering (NOTAT = 2).

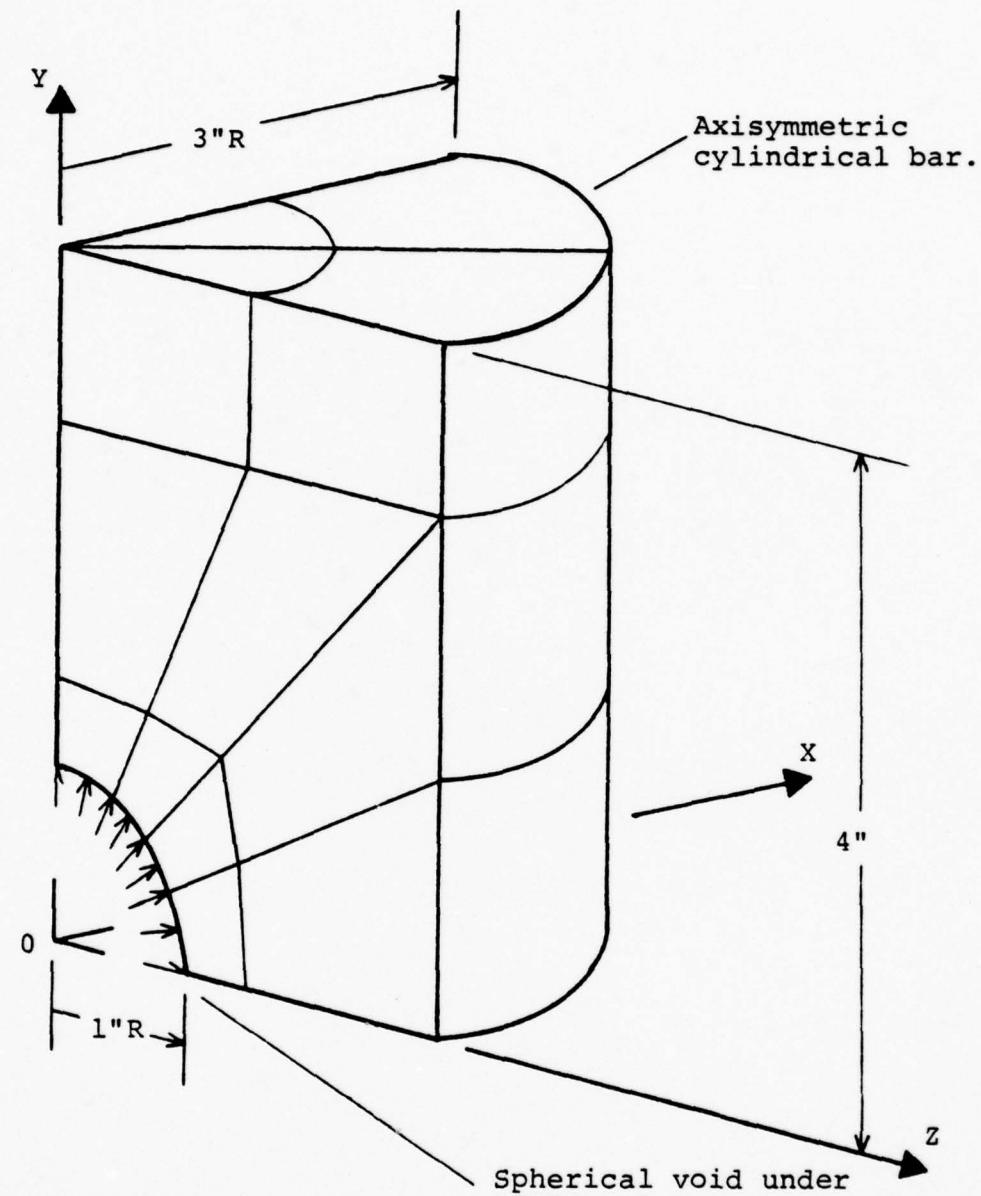

**BOUNDARY CONDITIONS**

X fixed on YZ plane ( $X = 0$ )  
 Y fixed on XZ plane ( $Y = 0$ )  
 Z fixed on XY plane ( $Z = 0$ )

Young's modulus =  $30.0 \times 10^6$  psi

Poisson's ratio = .333

Figure 15. Example 4, six inch diameter cylindrical bar with a two inch diameter spherical void on the center line under pressure.

KIBLER AE SAP IV 3-D SOLID ELEMENT TO BE PLOTTED CN GRAPH  
 PSAP1 TITLE -21 NODE BRICK TESTING SUBROUTINE SOL21  
 \*\*\*  
 \*\*\* NAMELIST OPTION

EOPTICN  
 YSPACE=6.0,  
 NCDEST=129,  
 GENC

\*\*\* SPHERICAL VOID WITH PRESSURE - IV EXAMPLE  
 8-20 NCDE BRICK

| 129   | 1 | 1 | 0 | 0 | 0 | 0 |
|---|---|---|---|---|---|---|
| *** MASTER CONTROL CARD   |   |   |   |   |   |   |
| NODAL POINT DATA<br>1 0.C 0.C C.243 1.970<br>1 0.C 0.17183 0.17183 C.970<br>1 0.C 0.243 0.243 C.970<br>1 0.C 0.7106 0.7106 0.894<br>1 0.C 0.31608 0.31608 0.894<br>1 0.C 0.41297 0.41297 0.894<br>1 0.C 0.447 0.447 0.894<br>1 0.C 0.42426 0.42426 0.894<br>1 0.C 0.6 0.6 0.894<br>1 0.C 0.707 0.707 0.707<br>1 0.C 0.27056 0.27056 0.707<br>1 0.C 0.49992 0.49992 0.707<br>1 0.C 0.65318 0.65318 0.707<br>1 0.C 0.707 0.707 0.707<br>1 0.C 0.6 0.6 0.600<br>1 0.C 0.56568 0.56568 0.600<br>1 0.C 0.800 0.800 0.600<br>1 0.C 0.694 0.694 0.447<br>1 0.C 0.34212 0.34212 0.447<br>1 0.C 0.63215 0.63215 0.447<br>1 0.C 0.82595 0.82595 0.447<br>1 0.C 0.894 0.894 0.447<br>1 0.C 0.670 0.670 0.243<br>1 0.C 0.68589 0.68589 0.243<br>1 0.C 0.970 0.970 0.243 |   |   |   |   |   |   |

\*\*\* Not part of  
 input deck.

Figure 16. Example 4,  
PSAP1 input deck  
listing, page 1 of 6.





|     | VARIABLES |         | NODE THICK |         | SHELL 3D ELEMENTS   |             |
|-----|-----------|---------|------------|---------|---------------------|-------------|
| 117 | 1         | 0       | 0          | 1       | 1                   | 1           |
| 118 | 6         | 0       | 0          | 1       | 1                   | 1           |
| 119 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 120 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 121 | 0         | 1       | 0          | 1       | 1                   | 1           |
| 122 | 1         | 0       | 0          | 1       | 1                   | 1           |
| 123 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 124 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 125 | 1         | 0       | 0          | 1       | 1                   | 1           |
| 126 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 127 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 128 | 0         | 0       | 0          | 1       | 1                   | 1           |
| 129 | 0         | 1       | ***        | 1       | VARIABLE NODE THICK | 3D ELEMENTS |
| 8   | 20        | 1       | 30.0E06    | 20      | 0.0E06              | 30.0E06     |
| 1   | 12.0E06   | 12.0E06 | 12.0E06    | 30.0E06 | 0.333               | 0.333       |
|     | 12.0E06   | 12.0E06 | 12.0E06    | 12.0E06 |                     |             |
|     |           |         |            |         |                     |             |
|     |           |         |            |         | BLANK CARD          | BLANK CARD  |
|     |           |         |            |         | BLANK CARD          | BLANK CARD  |
|     |           |         |            |         | BLANK CARD          | BLANK CARD  |
|     |           |         |            |         | BLANK CARD          | BLANK CARD  |
|     |           |         |            |         | 1.0                 | 1.0         |
|     |           |         |            |         |                     |             |
|     |           |         |            |         |                     |             |

Figure 16. Continued, page 4 of 6. \*\*\*\*\* Not part of input deck.

|     |     |     |     |     |     |     |     |    |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| 100 | 92  | 94  | 102 | 54  | 46  | 48  | 56  | 97 | 93  | 98  | 101 | 51  | 47  | 52  | 55  |     |
| 74  | 71  | 72  | 75  | 0   | 0   | 54  | 56  | 64 | 105 | 1C1 | 106 | 109 | 59  | 55  | 60  | 63  |
| 8   | 20  | 0   | 102 | 110 | 62  | 54  | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 108 | 100 | 102 | 110 | 110 | 110 | 0   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 77  | 174 | 175 | 178 | 178 | 178 | 0   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 9   | 14  | 0   | 113 | 113 | 113 | 119 | 84  | 80 | 80  | 86  | 114 | 115 | 118 | 81  | 82  | 85  |
| 117 | 113 | 113 | 113 | 113 | 113 | 119 | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 10  | 16  | 0   | 110 | 110 | 110 | 127 | 92  | 84 | 86  | 94  | 122 | 118 | 123 | 126 | 89  | 85  |
| 125 | 117 | 119 | 119 | 127 | 127 | 0   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 11  | 14  | 0   | 34  | 34  | 42  | 1   | 7   | 1  | 1   | 9   | 36  | 37  | 41  | 1   | 3   | 4   |
| 40  | 16  | 0   | 42  | 42  | 50  | 1   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 12  | 16  | 0   | 50  | 50  | 58  | 1   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 48  | 40  | 42  | 42  | 50  | 58  | 23  | 15  | 15 | 17  | 25  | 52  | 44  | 41  | 45  | 49  | 11  |
| 12  | 16  | 0   | 58  | 58  | 66  | 1   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 56  | 48  | 50  | 58  | 58  | 66  | 31  | 23  | 23 | 25  | 33  | 60  | 57  | 61  | 65  | 1   | 19  |
| 14  | 16  | 0   | 58  | 58  | 66  | 1   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 64  | 56  | 58  | 66  | 66  | 70  | 73  | 48  | 40 | 42  | 50  | 90  | 87  | 91  | 95  | 44  | 41  |
| 15  | 18  | 0   | 0   | 1   | 0   | 0   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 86  | 80  | 80  | 88  | 88  | 40  | 40  | 34  | 34 | 42  | 82  | 83  | 87  | 36  | 37  | 37  | 41  |
| 69  | 67  | 67  | 70  | 70  | 70  | 0   | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 16  | 20  | 0   | 88  | 88  | 96  | 48  | 40  | 42 | 50  | 90  | 87  | 91  | 95  | 44  | 41  | 45  |
| 54  | 86  | 86  | 88  | 88  | 96  | 96  | 104 | 56 | 48  | 50  | 58  | 98  | 95  | 99  | 103 | 52  |
| 72  | 69  | 70  | 70  | 73  | 73  | 73  | 76  | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 17  | 20  | 0   | 96  | 96  | 104 | 104 | 104 | 56 | 48  | 50  | 58  | 66  | 106 | 103 | 107 | 111 |
| 102 | 94  | 94  | 96  | 96  | 104 | 104 | 104 | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 175 | 72  | 72  | 73  | 73  | 73  | 73  | 76  | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 18  | 20  | 0   | 112 | 112 | 112 | 112 | 64  | 56 | 58  | 66  | 106 | 103 | 107 | 111 | 60  | 57  |
| 110 | 104 | 104 | 112 | 112 | 112 | 112 | 64  | 56 | 58  | 66  | 106 | 103 | 107 | 111 | 60  | 57  |
| 178 | 175 | 176 | 176 | 176 | 176 | 176 | 176 | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 19  | 14  | 0   | 113 | 113 | 113 | 121 | 86  | 80 | 80  | 88  | 115 | 116 | 120 | 82  | 83  | 87  |
| 115 | 113 | 113 | 113 | 113 | 113 | 121 | 0   | 0  | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 20  | 16  | 0   | 121 | 121 | 129 | 94  | 86  | 88 | 96  | 123 | 123 | 124 | 128 | 90  | 87  | 91  |
| 127 | 119 | 121 | 121 | 129 | 129 | 94  | 86  | 88 | 96  | 123 | 123 | 124 | 128 | 90  | 87  | 95  |

Figure 16. Continued, page 5 of 6. \*\*\*\* Not part of input deck.

```

***** NAMELIST PICT FOR TCTAL STRUCTURE

EPICT
KVERT=2,
PHI=10.0,
THETA=10.0,
PSI=45.0,
ISCALE=2,
XCRGN=C:4,
PSCALE=0.5714,
KOCF=1,
GENC

***** NAMELIST PICT, ELEMENTS 1-10, NODES NUMBERED

EPICT
ISCALE=C,
INCTAT=1,
XLFT=C:1,
NELMAX=10,
GENC

***** NAMELIST PICT, ELEMENTS 1-10, EXPLODED PLOT

EPICT
NOTAT=2,
KDISP=2,
DMACS=C:5,
XLFT=0.151,
GENC

***** NAMELIST PICT, ELEMENTS 11-20, NODES NUMBERED

EPICT
NOTAT=1,
XLFT=C:1,
KDISP=C:5,
NELMIN=11,
NELMAX=20,
GENC

***** NAMELIST PICT, ELEMENTS 11-20, EXPLODED PLOT


EPICT
NOTAT=2,
KDISP=2,
DMACS=C:5,
XLFT=0.151,
KOCF=0,
GENC

***** Not part of input deck.

```


Figure 16. Continued, page 6 of 6.

Figure 17. Example 4, PSAP1 output graphs, page 1 of 5.

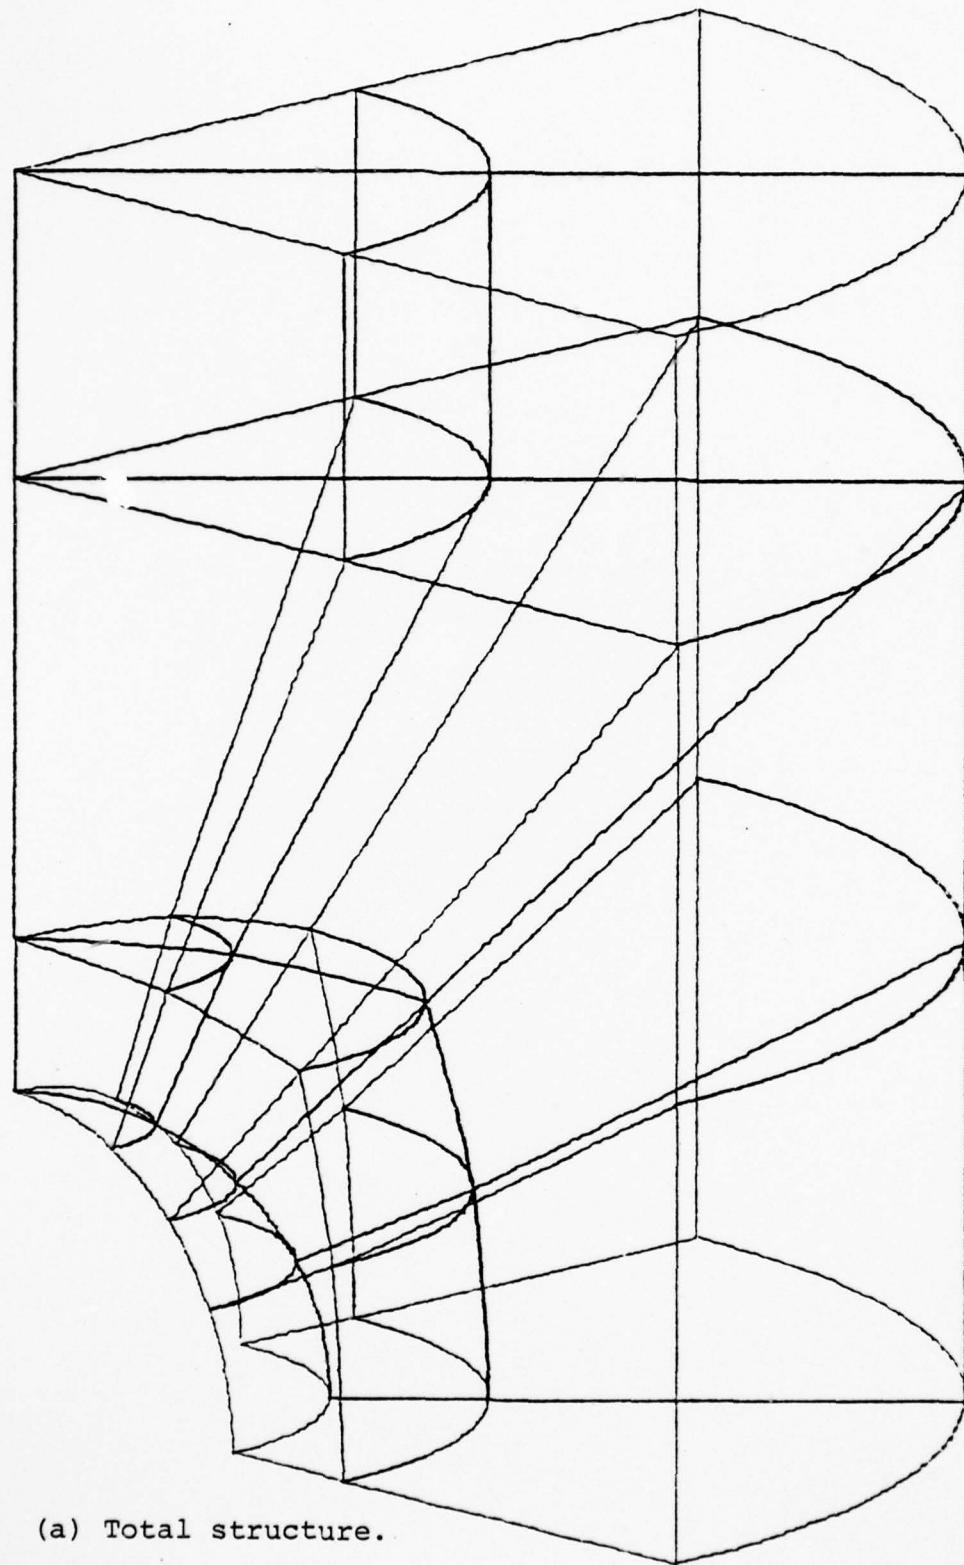


(a) Total structure.

Figure 17. Continued, page 2 of 5.

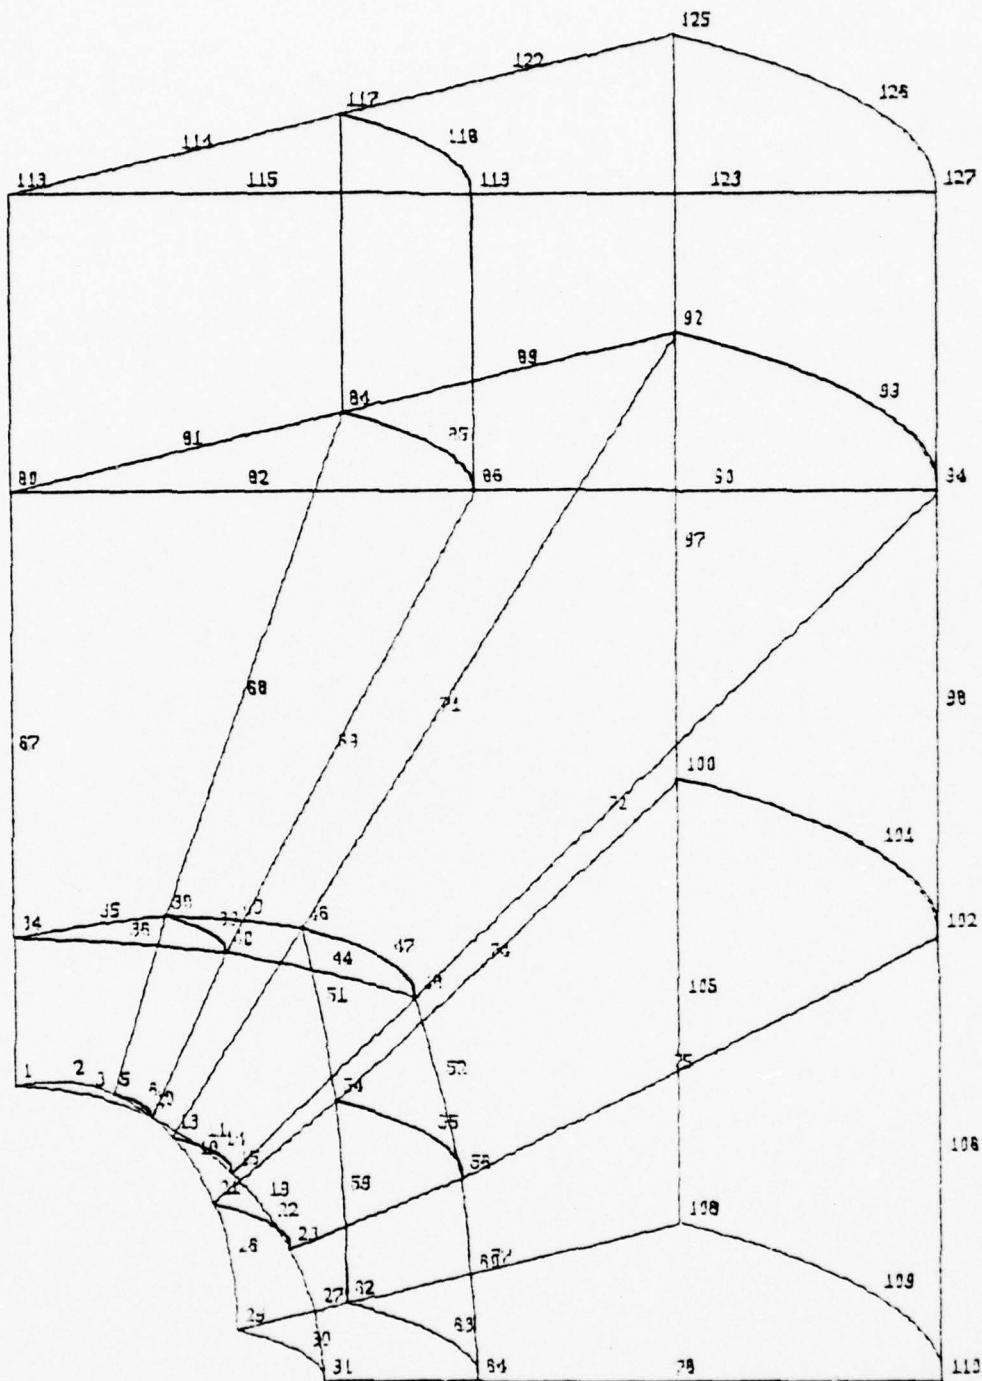


(b) Elements 1-10, nodes numbered.

Figure 17. Continued, page 3 of 5.

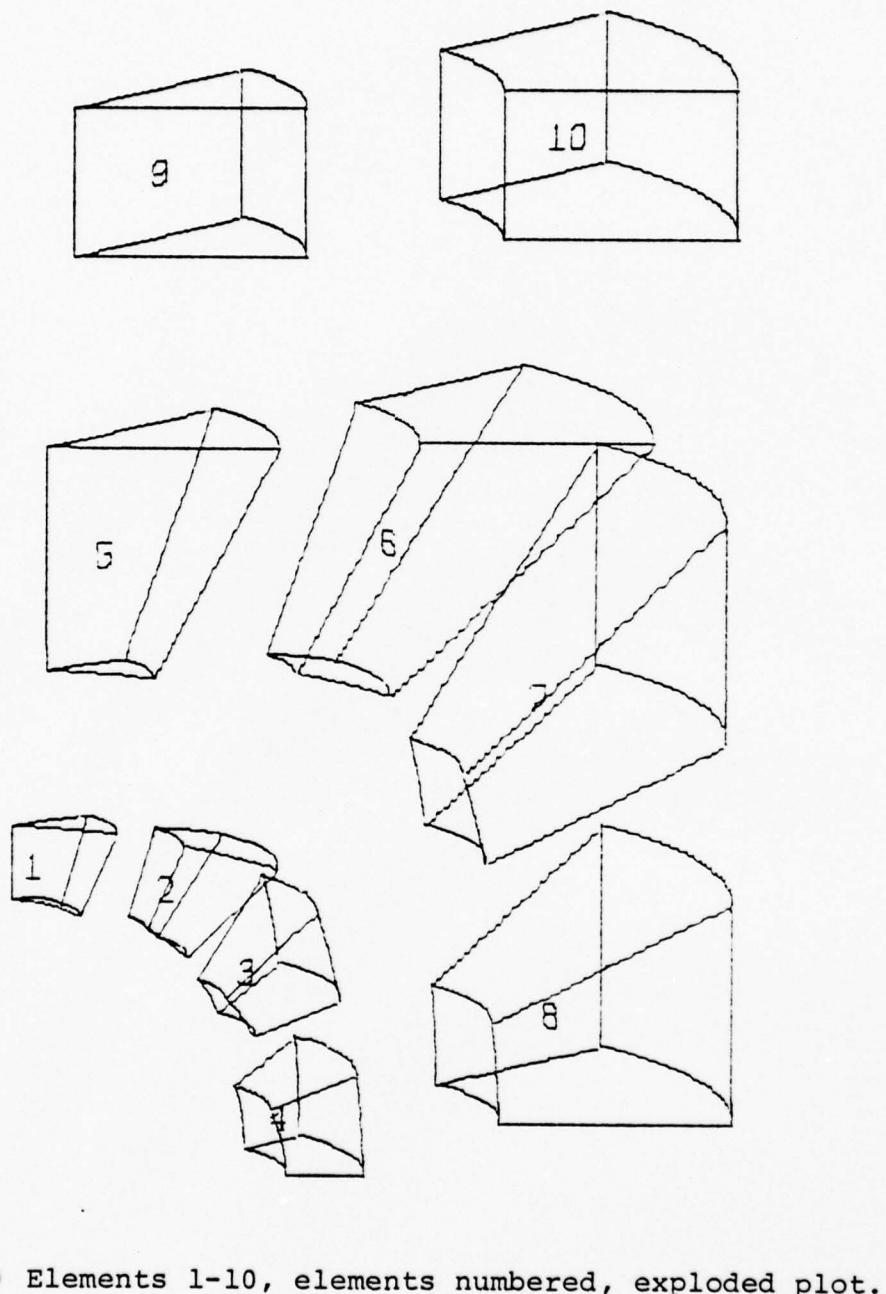


(c) Elements 1-10, elements numbered, exploded plot.

Figure 17. Continued, page 4 of 5.

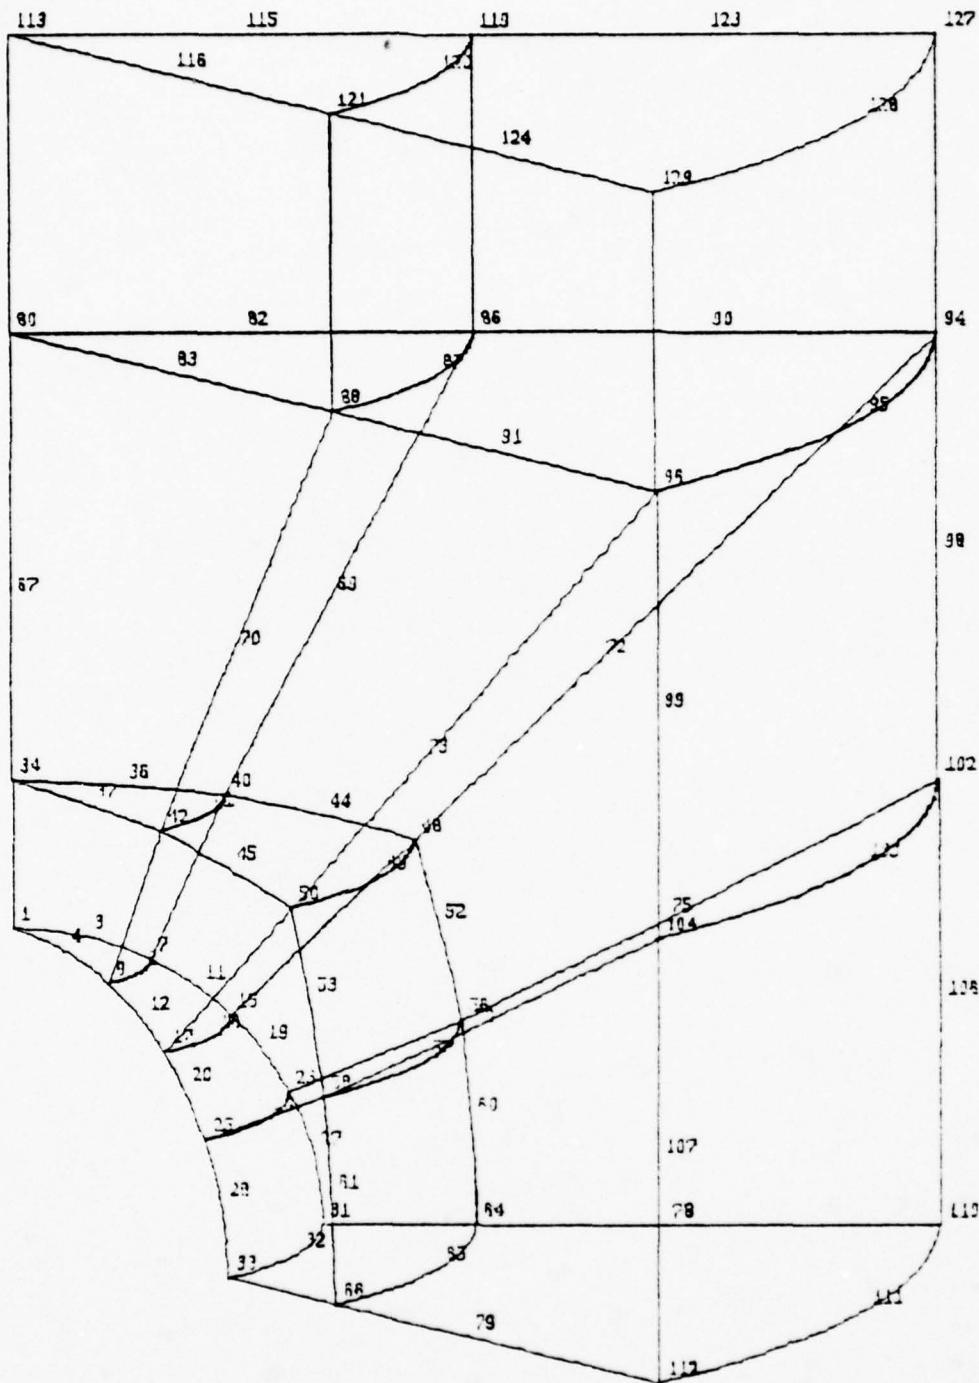

(d) Elements 11-20, nodes numbered.

Figure 17. Continued, page 5 of 5.

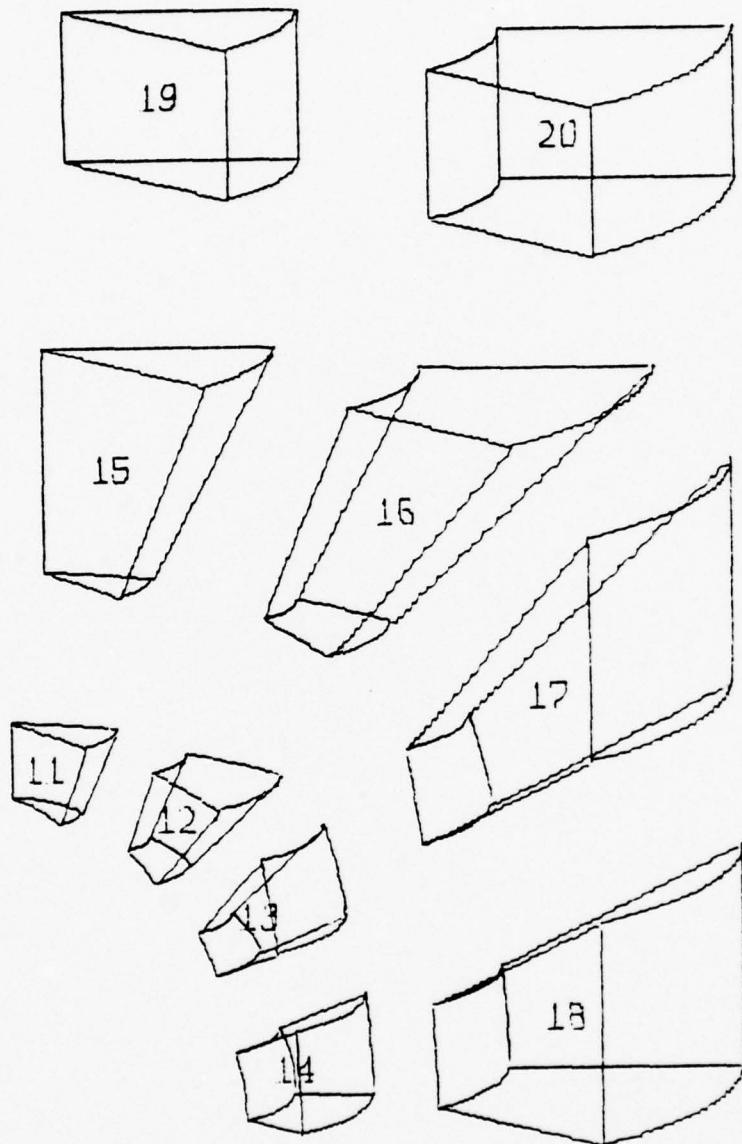

(e) Elements 11-20, elements numbered, exploded plot.

#### IV. CONCLUSIONS AND RECOMMENDATIONS

With a little study of PSAP1 and figure 2, one realizes how simple it would be to expand PSAP1 to include virtually an unlimited number of geometry data input formats. Simply supply the GEOMn subroutines, element subroutines and modify SUBROUTINE ELTYPE if necessary. Another interesting project would be to incorporate PSAP1 into ADINA and SAP IV so that a mesh plot could be obtained in the data check mode only. Reference 4 contains routines for plotting stress contours which could be incorporated. Hidden line logic is available. It would be difficult but could be incorporated. Hidden line plots are pretty, but they are not very practical when preprocessing because in preprocessing it is advantageous to see all of the nodes.

## APPENDIX A

### PSAPI1 USERS MANUAL

#### I. NAMELISTS

It may be useful for the user to review NAMELISTS in any good FORTRAN manual. However, a short description of the NAMELIST input is given here. Only columns 2 through 80 of each card will be read. The computer expects to find a special delimiter symbol in column 2 of the first card followed by the NAMELIST name. The delimiter symbol for the IBM 360-370 series is the ampersand & ; other processors use the dollar sign \$. Following the first card comes the list of variables and their assigned values. Some important points about the variables are:

- A. Variables and their values need not appear in any special order.
- B. Predefined variables need not appear in the list if it is not necessary to change the value.
- C. A comma should follow each assigned value.
- D. It is recommended that each variable appear on a separate card to facilitate change.

The last card following the NAMELIST variables contains, beginning in column 2, the delimiter sign followed by the word END. For example, &OPTION (read NAMELIST OPTION) contains 12 variables. All are initially assigned default

values. But, suppose three of those values (NNDEST=200, KGEM=9, YSPACE=2.0) do not apply to a specific problem. The &OPTION would be read as follows:

```
&OPTION  
- NNDEST=300,  
- KGEM=1,  
- YSPACE=5.0,  
- &END
```

Blank space in column 1.

## II. INPUT PROCEDURES

The following sequence of cards is necessary to use PSAP1.

NOTES IBM CARDS

COLUMNS

123456789-----

(1) // [Standard green job card]  
// EXEC FORTCLGP,REGION.GO=150K  
//FORT.SYSIN DD \*

(2) C MAIN PROGRAM  
DIMENSION ZZZ(NZ),DISPD(5,3,NON)  
CALL PSAP1(ZZZ,NZ,DISPD,NON)  
STOP  
END

(3) /\*  
//LINK.USDD DD UNIT=3330,VOL=SER=DISK02,  
// DISP=SHR,DSN=S1153.PSAP1  
//LINK.SYSIN DD \*  
INCLUDE USDD(LOADM)  
ENTRY MAIN

```
(4)      /*  
         //GO.FT10F001 DD UNIT=SYSDA,  
         // SPACE=(CYL,(3,1)),  
         // DCB=(RECFM=VS,BULKSIZE=3520)  
  
(5)      //GO.SYSIN DD *  
  
(6)      [PSAP1 title card as it appears on plot]  
  
(7)      &OPTION  
              [&OPTION variables to be initially set or changed]  
              &END  
  
(8)      [ADINA or SAP IV geometry data. Title  
              card through element data - remove load cards]  
  
(9)      [Case identification card - Omit if IDCASE = 0]  
              [Displacement data cards - Omit for preprocessing  
              only]  
  
(10)     &PICT  
              [&PICT variables to be initially set or changed]  
              &END  
  
(11)     [Additional data as defined by last value of  
              KODE in NAMELIST PICT - Omit if last  
              value of KODE = 0]  
  
(12)     /*
```

**Notes:**

- (1) Standard basic deck set up as described in chapter 3 of reference 8.

```
// [Standard green job card]
// EXEC FORTCLGP,REGION.GO=150K
//FORT.SYSIN DD *
```

- (2) Main program.

```
DIMENSION ZZZ(NZ),DISPD(5,3,NON)
CALL PSAP1(ZZZ,NZ,DISPD,NON)
STOP
END
```

The main program has two functions: to allocate fast storage space, and to call PSAP1. NON must be greater than the number of nodes. NZ must be greater than 4\*NON(7\*NON if displacement data cards are to be input. i.e., NUDISP, NVDISP, or NWDisp = 1).

- (3) Using load module library.

```
/*
//LINK.USDD DD UNIT=3330,VOL=SER=DISK02,
// DISP=SHR,DSN=S1153.PSAP1
//LINK.SYSIN DD *
INCLUDE USDD(LOADM)
ENTRY MAIN
```

PSAP1 should be precompiled and stored in the machine in a load module. Load modules are a type of user library described in reference 7 and chapter 3 of reference 8. Since PSAP1 requires over one minute to compile, precompiling results in a large time

savings. These cards are subject to change, and the most current version is determined by the user maintaining this library. If PSAP1 is not on a load module, these control cards may be replaced by subroutine PSAP1 (which consists of a box and a half of cards).

(4) Allocation of storage.

```
/*
//GO.FT10F001 DD UNIT=SYSDA,
// SPACE=(CYL,(3,1)),
// DCB=(RECFM=VS,BULKSIZE=3520)
```

PSAP1 uses a slow storage device to store the element connectivity. These cards allocate 3 cylinders as described in chapter 3 of reference 8.

(5) Deck set up card.

```
//GO.SYSIN DD *
```

This is a standard deck set up card described in chapter 3 of reference 8.

(6) PSAP1 title card.

PSAP1 title card is the title that will appear on the graph. Make sure a user identification is on this card. It consists of 80 alphanumeric characters. The first 40 characters will form the first title line. The last 40 will form the second line.

(7) NAMELIST OPTION.

(Note: start in second column)

```
&OPTION  
[&OPTION variables to be initially set or changed]  
&END
```

| <u>VARIABLE-DEFAULT</u> | <u>DESCRIPTION</u>                       |
|-------------------------|--|
| NNDEST-200              | Must be equal to the number of nodes.    |
| NUDISP-0                | 0 - X direction displacements not input. |
|                         | 1 - X direction displacements input.     |
| NVDISP-0                | 0 - Y direction displacements not input. |
|                         | 1 - Y direction displacements input.     |
| NWDisp-0                | 0 - Z direction displacements not input. |
|                         | 1 - Z direction displacements input.     |

(Note: unless displacement data is to be input,  
allow NUDISP, NVDISP, and NWDisp to default.)

|         |   |
|---------|---|
| KGEOM-9 | Specifies the geometry input format.<br><br>1- Subroutine GEOM1 reads in ADINA data<br>deck geometry and connectivity.<br><br>2- Subroutine GEOM2 may be supplied by<br>user along with subroutines NSPLAN, NS3DEE and NSTRU<br>to read nodal data and connectivity in any format.<br><br>9- Subroutine GEOM9 reads in SAP IV<br>data deck geometry and connectivity. |
| KDATA-9 | Specifies the subroutine and corresponding<br>method of input for displacement data.<br><br>1- Subroutine DATA1, a user supplied<br>subroutine.   |

2- Subroutine DATA2, a user supplied subroutine.

9- Subroutine DATA9, reads a punched output displacement deck from execution of SAP IV as presented in reference 6. (Note: unless displacement data is to be plotted, allow to default.)

|            |  |
|------------|--|
| NVALUS-0   | Not incorporated, allow to default.  |
| IRESEQ-1   | Not incorporated, allow to default.  |
| KPLOT-1    | Not incorporated, allow to default.  |
| YSPACE-2.0 | Space between plots in the Y direction in inches when successive plots are plotted (i.e., KODE ≠ 0). The graph title is plotted both on the top and at the bottom of each set of graphs controlled by a given NAMELIST OPTION. The space between the title and the plot is YSPACE/2.0. |
| PSIZE-9.0  | Paper size in the X direction, in inches. Used in scaling of the plots to insure this dimension is not exceeded. However, when manual scaling (ISCALE = 2; see NAMELIST PICT) this protection is not available, and it is possible to exceed the paper width.                          |
| IDCASE-0   | 0- No identification card precedes the deck of displacement values.<br>1- Identification card precedes the deck of displacement values.  |

(8) SAP IV or ADINA data cards.

Here insert the geometry (node coordinates) and element connectivity. This includes the title card through the element data cards; the load cards are removed. For a SAP IV data deck, NAMELIST OPTION variable KGEOM = 9. For an ADINA data deck, KGEOM = 1.

From ADINA deck remove:

1. Applied loads data.
2. Frequency and mode shape calculations data.

From SAP IV deck remove:

1. Concentrated load mass data.
2. Element load multipliers.
3. Dynamic analysis cards.

Otherwise, these cards are exactly the same as the deck prepared for SAP IV or ADINA. PSAP1 is not limited to SAP IV and ADINA. The user may specify any unique format (i.e., KGEOM = 2). In this case, SUBROUTINE GEOM2 must be supplied by the user.

(9) Case ID card and displacement data cards.

PSAP1 is intended to be used essentially for preprocessing. If it is desired to use the postprocessing option, the user is referred to reference 6. Otherwise, omit the case ID card and displacement data.

(10) and (11) NAMELIST PICT.

(Note: start in second column)

```
&PICT  
[&PICT variables to be initially set or changed]  
&END
```

| <u>VARIABLE-DEFAULT</u> | <u>DESCRIPTION</u>  |
|-------------------------|---|
| KHORZ-1                 | Integer designating the horizontal axes<br>of the viewing plane. $1 = X_o$ . $2 = Y_o$ . $3 = Z_o$ .<br>(See figure 18.)  |
| KVERT-2                 | Integer designating the vertical axes<br>of the viewing plane. $1 = X_o$ . $2 = Y_o$ . $3 = Z_o$ .<br>(See figure 18.)  |
| PHI-0.0                 | Angular rotation of the model about its<br>X axis in degrees (performed 3rd, see figure 18).  |
| THETA-0.0               | Angular rotation of the model about its<br>Y axis in degrees (performed 2nd, see figure 18).  |
| PSI-0.0                 | Angular rotation of the model about its<br>Z axis in degrees (performed 1st, see figure 18).  |
| NEWFR-1                 | 1- Frame change before plotting.<br>2- No frame change before plotting.<br><br>(Normally allow to default. A frame change resets<br>the Y origin past the previous plot by YSPACE given<br>in NAMELIST OPTION and resets the X origin at 0.0) |
| ISCALE-1                | 0- No scale change. Use the same scale<br>as the previous plot. Useful in an assembly graph<br>where it is desired to examine a mesh in sections  |

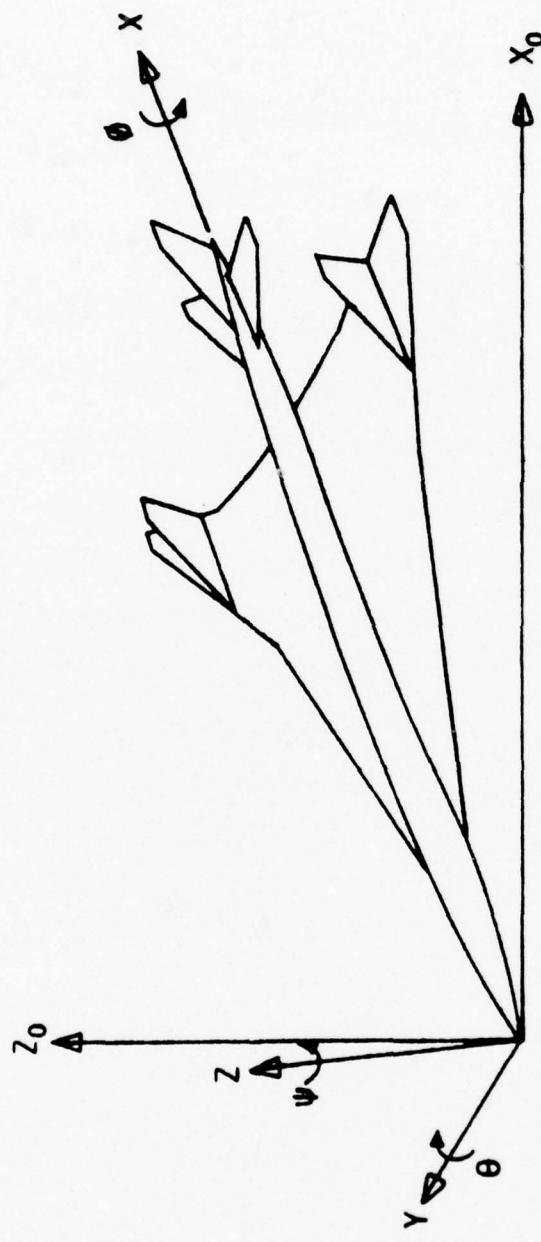


Figure 18. Coordinate systems and Euler angles (rotations) for an oblique orthographic projection shown in  $x$ - $z$  viewing plane.  
(Taken from reference 4, page 127.)

without losing perspective. See example 3 in  
Section III of this thesis. ISCALE cannot be zero  
in the first NAMELIST PICT.

1~ Automatic scaling of plot and  
computation of proper origin location.

2~ User specified origin and scaling.

PLOTSZ-10.0                    Maximum dimension desired on com-  
                                  pleted plot prior to rotation. After rotation it  
                                  is possible for the maximum dimension in the pro-  
                                  jected plane to exceed PLOTSZ. The maximum size  
                                  of the projection is unlimited on the vertical axis  
                                  but is limited by the paper width (PSIZE in NAMELIST  
                                  OPTION) on the horizontal axis. If rotation of the  
                                  model causes the projection to go off the paper,  
                                  it is rescaled prior to plotting. PLOTSZ is used  
                                  in scaling only if ISCALE = 1).

XORGN-0.0                    X location of the plot origin.  
(Used only if ISCALE = 2.)

YORGN-0.0                    Y location of the plot origin.  
(Used only if ISCALE = 2.)

PSCALE-1.0                    Model size reduction factor.  
PSCALE is equal to the actual model size divided by  
the desired plot size. It is used only if ISCALE = 2.  
(Note that when ISCALE = 2 is used, no rescaling  
occurs if rotation causes the projection to exceed  
the paper width.)

NOTAT-0                    0- No numbering on plots.

                  1- Numbering of grid points.

                  2- Numbering of elements.

XLHT-0.14                Height in inches of the integers

specified by NOTAT. It should be a multiple of .07. If XLHT is not a multiple of .07, it will be rounded to the nearest multiple. XLHT has a maximum of .49 and a minimum of .07.

KDISP-0                0- Plot of undeformed structure.

                  1- Plot of deformed structure.

                  2- Exploded plot.

                  3- Displacement represented by vectors.

KDISP = 1 or 3 represents a form of postprocessing and displacement data must be input in (9). If postprocessing is desired, refer to reference 6.

IDMAG-2                1- Direct magnification of displacement data by DMAGS.

                  2- Scaling of displacement data to a maximum value of DMAGS.

DMAGS-1.0               Magnification of displacements

(if KDISP = 1 or 3). Reduction factor of elements (if KDISP = 2).

KSYMXY-0               1- Symmetry about X-Y plane.

KSYMxz-0                    1- Symmetry about X-Z plane.  
KSYMyz-0                    1- Symmetry about Y-Z plane.  
A plate quadrant with KSYMxz and  
KSYMxy equal to 1 would yield a complete plate.  
See example 2 in Section III in this thesis.

Note: To develop a partial plot, three methods of segregating elements exist: First, by X, Y and Z cutting planes; second, by node numbers; and third, by element numbers. The next ten variables are used to separate elements into partial plots.

XXMAX,YYMAX,ZZMAX-1.0E20    Local cutting planes  
XXMIN,YYMIN,ZZMIN-(-1.0E20)    Parallel to the principal  
                                  planes.  
  
NDMAX-9999999                Maximum gridpoint identification  
                                  number to be included in the plot.

NDMIN-0                        Minimum gridpoint identification  
                                  number to be included in the plot.

NELMAX-9999999              Maximum element number to be  
                                  included in the plot.

NELMIN-0                      Minimum element number to be  
                                  included in the plot.

KODE-0

Specifies the control option after  
the plot is completed.

0- Last plot, exit from program.

1- Read another NAMELIST PICT.

2- Read a new set of displacement  
data. (Postprocessing only.) For KODE = 2, dis-  
placement data must be followed by another NAMELIST  
PICT.

3- Read a complete new set of input  
data starting with a title card.

For KODE = 1, 2 or 3, additional  
sections of the deck must be repeated. The deck  
must end with a NAMELIST PICT having a value of  
KODE = 0.

Note: A most important point to remember when  
generating a sequence of plots is that once a  
parameter has been defined, it retains that value  
until it is reassigned. For example, if PLOTSZ is  
assigned a value of 8.0 for the first of a series  
of plots, and it is not redefined in any subsequent  
NAMELIST PICT; the value of PLOTSZ will be retained  
as originally specified. However, when KODE = 3  
and a new title, NAMELIST OPTION and problem data  
are read, all variables in NAMELIST OPTION and  
NAMELIST PICT are assigned their default values. The

problem starts over in this case. Refer to the flow chart in figure 1 and study the path for different values of KODE.

(12) Delimiter card.

/\*

Delimiter card is defined in chapter 3 of reference 8.

### III. SPECIAL FEATURES OF PSAP1

#### A. POSTPROCESSING

Reference 6 contains information and examples on the use of the postprocessor. SAP IV has the capability to punch displacement data cards in an acceptable format for PSAP1 (specifically subroutine DATA9). As of this writing, ADINA does not have this capability, and data cards would have to be punched manually by the user.

#### B. PARTIAL DATA

Reference 6, on page 30, establishes a procedure by which it is possible to input only a portion of the finite element model for a data check. This feature is valuable in a case where several different people are preparing different parts of a large data base for a problem and desire to check individually their inputs graphically for accuracy. All nodal coordinates for the entire model may be input, or only those that specifically define the portion of the finite element model to be plotted. In either case, all nodal coordinates that define the elements to be plotted must be specified. To use this feature the "element control cards" (described in references 1 and 2) must be modified. For example, if only the connectivity for elements 15 through 50 of a problem are available, the changes below would be made.

1. All SAP IV Elements

All SAP IV element control card changes would have similar changes because columns 6-10 contain the total number of group elements. Columns 66-70 are not used. Thus to plot only elements 15 through 50, make the following changes:

- a. Enter the upper bound (i.e., 50) in columns 6-10.
- b. Enter the lower bound (i.e., 15) in columns 66-70.

2. ADINA Truss, 2D and 3D Elements

ADINA element control cards for the truss, 2D continuum and the 3D continuum elements would be changed as follows:

- a. Enter the upper bound (i.e., 50) in columns 5-8.
- b. Enter the lower bound (i.e., 15) in columns 53-56.

3. ADINA Beam Element

ADINA element control cards for the beam element would be changed as follows:

- a. Enter the upper bound (i.e., 50) in columns 5-8.
- b. Enter the lower bound (i.e., 15) in columns 65-68.

MAIN PROGRAM

```
DIMENSION ZZZ(1400),DISPD(5,3,200)
CALL PSAPI(ZZZ,1400,CISPD,200)
STOP
END
PSAPI
```

SUBROUTINE PSAPI DOCUMENTATION

DESCRIPTION OF INPUT DATA CARDS

TITLE CARD - 80 ALPHANUMERIC CHARACTERS OF GRAPH TITLE INFORMATION  
TO BE PRINTED ABOVE AND BELOW THE GRAPH. THE FIRST 40  
CHARACTERS WILL FORM THE FIRST TITLE LINE. THE LAST 40

NAMELIST OPTION - CONTAINS VALUES TO VERIFY STORAGE IN BLANK  
COMMON AND CONTROL VALUES NEEDED BY THE PROGRAM.

THE FOLLOWING VALUES ARE INCLUDED---

NNDEST = ESTIMATE NUMBER OF GRID POINTS TO BE USED. VALUE MUST  
BE GREATER THAN OR EQUAL TO THE ACTUAL NUMBER OF GRID  
POINTS.

\*\* DEFAULT = 200 \*\*  
NUDISP = 0 FOR NO DISPLACEMENT DATA IN X-DIRECTION.  
= 1 FOR DATA INCLUDING DISPLACEMENTS IN X-DIRECTION.  
\*\* DEFAULT = 0 \*\*  
NVDISP = 0 FOR NO DISPLACEMENT DATA IN Y-DIRECTION.  
= 1 FOR DATA INCLUDING DISPLACEMENTS IN Y-DIRECTION.  
\*\* DEFAULT = 0 \*\*  
NWDISP = 0 FOR NO DISPLACEMENT DATA IN Z-DIRECTION.  
= 1 FOR DATA INCLUDING DISPLACEMENTS IN Z-DIRECTION.  
\*\* DEFAULT = 0 \*\*

KGEOM SPECIFIES SUBROUTINE AND CORRESPONDING METHOD OF INPUT  
FOR MODEL GEOMETRY.  
KGEOM = 1 FOR USER SUPPLIED SUBROUTINE - GEOM1

CC

```

GEOM1 DEVELOPED TO READ ADINA GEOMETRY DATA - MAR 77 000000390
= 2 FOR USER SUPPLIED SUBROUTINE - GEOM2 000000400
= 9 FOR SAP IV DATA DECK INPUT SUBROUTINE - GEOM9 000000410
KDATA READS SAP IV GEOMETRY DATA - MODIFIED MAR 77 000000420
** DEFAULT = 9 ** 000000430
KDATA SPECIFIES SUBROUTINE AND CORRESPONDING METHOD OF INPUT 000000440
FOR DISPLACEMENT DATA 000000450
KDATA = 1 FOR SUBROUTINE DATA1 TO READ IN DISPLACEMENT DATA 000000460
-- SUPPLIED BY THE USER 000000470
= 5 FOR SUBROUTINE DATA5 TO READ IN DISPLACEMENT DATA 000000480
-- SUPPLIED BY THE USER. 000000490
= 9 FOR SUBROUTINE DATA9 TO READ SAP IV DATA. 000000500
** DEFAULT = 9 ** 000000510
NVALUS - NOT USED AT NPS ----- ALLOW DEFAULT 000000520
000000530
000000540
000000550
000000560
000000570
000000580
000000590
000000600
000000610
000000620
000000630
000000640
000000650
000000660
000000670
000000680
000000690
000000700
000000710
000000720
000000730
000000740
000000750
000000760
000000770
000000780
000000790
000000800
000000810
000000820
000000830
000000840
000000850
000000860

** IRESEQ = 0 ** 000000390
** DEFAULT = 1 ** 000000400
KPLOT SPECIFIES THE TYPE OF OUTPUT DEVICE TO BE USED. 000000410
KPLOT = 1 FOR CALCOMP. 000000420
= 2 FOR LANCLEY RESEARCH CENTER USE ONLY 000000430
= 3 FOR LRC USE ONLY 000000440
= 4 FOR LRC USE ONLY 000000450
YSPACE = 1 ** 000000460
DEFAULT = SPACER BETWEEN PLOTS IN Y DIRECTION (INCHES) WHEN 000000470
MUTLIPLE PLOTS ARE PRODUCED. YSPACE/2.0 IS SPACE 000000480
BETWEEN TITLE BLOCK AND PLOT. 000000490
** PSIZE = PAPER SIZE IN X DIRECTION USED IN SCALING OF 000000500
PLOTS TO INSURE THIS DIMENSION IS NOT EXCEEDED. 000000510
** IDCASE = 5.0 ** 000000520
DEFAULT = 5.0 ** 000000530
FOR NO TITLE CARD PRECEDING 000000540
DECKS OF DISPLACEMENT VALUES. 000000550
= 1 FOR TITLE CARD PRECEDING 000000560
DECKS OF DISPLACEMENT VALUES. 000000570
** DEFAULT = 0 ** 000000580

```

MODEL GEOMETRY IS NOW INPUT IN ONE OF THE FOLLOWING FORMS  
DEPENDING ON THE VALUE OF KGEOM SPECIFIED IN NAMELIST OPTION.

```

USE IF KGEOM = 1 000000790
CALL SUBROUTINE GEOM1 WHICH READS ADINA GEOMETRY DATA 000000800
USE IF KGEOM = 2 000000810
CALL SUBROUTINE GEOM2 WHICH IS PREPARED BY THE USER TO 000000820
000000830
000000840
000000850
000000860

```

READ GEOMETRY DATA.

USE IF KGEM = 9

CALL SUBROUTINE GECM9 WHICH READS SAP IV GEOMETRY DATA.

CASE IDENTIFICATION CARD.

THIS CARD IS OMITTED IF IDCASE=0 IS SPECIFIED IN OPTION  
IF PRESENT. THIS CARD CONTAINS ANY DESIRED ALPHANUMERIC  
INFORMATION IN COLUMNS 1-80 WILL NOT APPEAR ON PLOT BUT WILL  
APPEAR ON PRINTOUT ABOVE DISPLACEMENT DATA

DATA TO BE PLOTTED IS NOW INPUT IN ONE OF THE FOLLOWING FORMS  
DEPENDING ON THE VALUE OF KDATA SPECIFIED IN NAMELIST OPTION.

USE IF KDATA = 1  
CALL SUBROUTINE DATA1 WHICH IS PREPARED BY THE USER

USE IF KDATA = 5  
CALL SUBROUTINE DATA5 WHICH IS PREPARED BY THE USER  
CALL SUBROUTINE DATA9 WHICH READS SAP IV DISPLACEMENT DATA.  
A DISPLACEMENT DATA DECK CAN BE PREPARED FOR ADINA IN A  
FORMAT COMPATABLE WITH DATA9.

NAMELIST PICT - CONTAINS VALUES NEEDED TO GENERATE PLOTS.

THE FOLLOWING VALUES ARE INCLUDED---

KHORZ = INTEGER DESIGNATING HORIZONTAL AXIS OF VIEWING PLANE,  
WHERE 1=X, 2=Y, 3=Z.  
\*\* DEFAULT = 1 \*\*  
KVERT = INTEGER DESIGNATING VERTICAL AXIS OF VIEWING PLANE,

WHERE  $1=x$ ,  $2=y$ ,  $3=z$ .  
 PHI = \*\* DEFAULT = 2. \*\*  
 (ANGULAR ROTATION OF MODEL ABOUT ITS X-AXIS, IN DEGREES  
 (MUST BE TAKEN THIRD).  
 \*\* DEFAULT = 0.0 \*\*  
 THETA = (ANGULAR ROTATION OF MODEL ABOUT ITS Y-AXIS, IN DEGREES  
 (MUST BE TAKEN SECOND).  
 \*\* DEFAULT = 0.0 \*\*  
 PSI = (ANGULAR ROTATION OF MODEL ABOUT ITS Z-AXIS, IN DEGREES  
 (MUST BE TAKEN FIRST).  
 \*\* DEFAULT = 0.0 \*\*  
 NEWFR = 1 FOR FRAME CHANGE BEFORE PLOT IS MADE.  
 (A FRAME CHANGE RESETS THE Y-ORIGIN PAST PREVIOUS PLCT  
 BY YSPACE AND X ORIGIN AT 0.0.  
 NEWFR = NE.1 FOR NO FRAME CHANGE BEFORE PLOTTING.  
 \*\* DEFAULT = 1 \*\*  
 ISCALE = 1 FOR INTERNAL ORIGIN LOCATION AND SCALING.  
 = 2 FOR USER SPECIFIED ORIGIN AND SCALING.  
 = 0 FOR NO SCALE CHANGE (I.E. USE SAME SCALE AS PREVIOUS  
 PLOT). THIS IS USEFUL IN AN ASSEMBLY GRAPH WHERE IT IS  
 NECESSARY TO EXAMINE A MESH IN SECTIONS WITHOUT LOSING  
 PERSPECTIVE. ISCALE CANNOT BE ZERO ON THE FIRST PLOT.  
 PLOTSZ = MAXIMUM DIMENSION DESIRED ON COMPLETED PLOT.  
 (USED FOR SCALING IF ISCALE = 1)  
 PLOTSZ SCALES THE PLOT PRIOR TO ROTATION IF ROTATION  
 CAUSES THE PLOT TO EXCEED PAPER WIDTH (PSIZE), IT IS  
 RESCALED AND THE PLOT SIZE IS REDUCED ACCORDINGLY.  
 \*\* DEFAULT = 10.0 \*\*  
 XORGN = X-LOCATION OF PLOT ORIGIN (USED IF ISCALE = 2).  
 YORGN = Y-LOCATION OF PLOT ORIGIN (USED IF ISCALE = 2).  
 PSCALE = MODEL SIZE/DESIRED PLOT SIZE FACTOR. PSCALE = ACTUAL MODEL  
 SIZE/DESIRED PLOT SIZE (USED IF ISCALE = 2).  
 NOTAT = 0 FOR NO NUMBERING ON PLOTS.  
 = 1 FOR NUMBERING OF GRID POINTS.  
 = 2 FOR NUMBERING OF ELEMENTS.  
 \*\* DEFAULT = 0 \*\*  
 XLHT = HEIGHT OF INTEGERS SPECIFIED BY NCTAT, IN INCHES.  
 KDISP = 15 \*\*  
 KDISP = 0 FOR UNDEFORMED PLOT.  
 = 1 FOR DEFORMED PLOT.  
 = 2 FOR EXPLODED PLOT.  
 = 3 FOR DISPLACEMENTS REPRESENTED BY VECTORS.  
 ICMAG = C \*\*  
 ICMAG = 1 FOR DIRECT SCALING OF DATA BY DMAGS.

```

      = 2 FOR SCALING OF DATA TO A MAX. VALUE OF DMAGS.
      ** = 2 FOR REDUCTION OF ELEMENTS (IF KDISP=1).
      DMAGS = REDUCTION FACTOR OF ELEMENTS (IF KDISP=2).
      ** DEFAULT = 1.0 **
      KSYMXY = 1 FOR SYMMETRY ABOUT X-Y PLANE.
      ** DEFAULT = 0 **
      KSYMxz = 1 FOR SYMMETRY ABOUT X-Z PLANE.
      ** DEFAULT = C **
      KSYMyz = 1 FOR SYMMETRY ABOUT Y-Z PLANE.
      ** DEFAULT = 0 **
      XMAX, YMAX, ZMAX, XMIN, YMIN, ZMIN LOCATE CUTTING PLANES
      PARALLEL TO PRINCIPAL (X-Y, X-Z, Y-Z) PLANES
      TO LIMIT PLOT.
      ** DEFAULT XMAX=YMAX=ZMAX=1.0E+20 ***
      ** DEFAULT XMIN=YMIN=ZMIN=-1.0E+20 ***
      NDMAX = MAXIMUM GRID PT TO BE INCLUDED IN PLOT.
      ** DEFAULT = 99999.9999999999 **
      NDMIN = MINIMUM GRID PT. TO BE INCLUDED IN PLOT.
      ** DEFAULT = 0 **
      NELMAX = MAXIMUM ELEMENT NUMBER TO BE INCLUDED IN PLOT.
      ** DEFAULT = 99999.9999999999 **
      NELMIN = MINIMUM ELEMENT NUMBER TO BE INCLUDED IN PLOT.
      KODE SPECIFIES CONTROL OPTION AFTER PLOT IS COMPLETE.
      ** DEFAULT = 0 **
      KODE = 0, LAST PLCT, EXIT FROM PROGRAM.
      = 1, READ ANOTHER NAMELIST PICT.
      = 2, READ A NEW SET OF DISPLACEMENT DATA, INCLUDING A
           CASE IDENTIFICATION CARD IF PRESENT
           = 3, READ A COMPLETE NEW SET OF INPUT DATA,
           ** INCLUDING A TITLE CARD.
      ** DEFAULT = 0 ***

```

\*\*\*\*\*

THE ABOVE COMPRISES A COMPLETE BASIC SET OF INPUT DATA IF  
 KODE = 0 IN &PICT. FOR KODE = 1, 2, OR 3, ADDITIONAL SECTIONS OF  
 THE BASIC DECK MUST BE REPEATED. THE DECK MUST END WITH  
 THE BASIC &PICT HAVING KODE = 0.

\*\*\*\*\*

#### DESCRIPTION OF GRAPHICS SUBROUTINES

THE SUBROUTINES USED IN THE ACTUAL CREATION OF PLOTS BY  
THE CALCOMP MODEL 765 CAN BE FOUND IN NPS TECHNICAL NOTE  
NUMBER 0211-03, "PLOTTING PACKAGE FOR NPS IBM 360/367".

000002310  
000002320  
000002330  
000002340  
000002350  
000002360  
000002370  
000002380  
000002390  
000002400  
000002410  
000002420  
000002430  
000002440  
000002450  
000002460  
000002470  
000002480  
000002490  
000002500  
000002510  
000002520  
000002530  
000002540  
000002550  
000002560  
000002570  
000002580  
000002590  
000002600  
000002610  
000002620  
000002630  
000002640  
000002650  
000002660  
000002670  
000002680  
000002690  
000002700  
000002710  
000002720  
000002730  
000002740  
000002750  
000002760  
000002770  
000002780  

SUBROUTINE PSAPI IS A MODIFICATION TO NAVAL POSTGRADUATE  
SCHOOL THESIS BY LT D. M. LOSH DECEMBER 1976. MODIFICATION  
INCLUDED SAP IV 8-2: NODE, BRICK ELEMENTS, BOUNDARY ELEMENTS AND  
ADINA TRUSS, PLANE, BRICK, BEAM ELEMENTS, AND OTHER MINOR  
IMPROVEMENTS.

MODIFIED BY ADRIAN E. KIBLER JR.  
LT USN  
NAVAL POSTGRADUATE SCHOOL  
MONTEREY, CA  
JAN - JUN 1977

\*\*\*\*\* THIS IS THE MAIN SUBROUTINE WHICH CALLS OTHER SUBROUTINES

SUBROUTINE PSAPI (ZZZ,NZ,DISPD,NON)  
\*  
\*\*\*\*\* THIS IS THE MAIN SUBROUTINE WHICH CALLS OTHER SUBROUTINES

INTEGER NUMPT, YPT, ZPT, UPT, VPT, WPT  
COMMON/CDATA/NTIME, NTLC  
COMMON/CONTRL/ KGEO, KDATA, KPLT, KSYMXY, KSYMXZ, KSYMYZ, NOTAT, XLHT,  
1KHORZ, KVERT, PHI, THETA, PSI, NEWFR, ISCALE, PLOT SZ, XORGN, YORGN,  
2PSCALE, KDISPD, DMAG, KODE  
COMMON/LIMITS/ XXMAX, YYMAX, ZMAX, XMIN, YMINT, ZZMIN, NDMAX, NDMIN,  
1NELMAX, NELMIN  
COMMON/CORGN/ YMAX, YSPACE, PSIZE  
COMMON/GLOOP/ ILLOOP

```

COMMON/ABLK/ A(3,3)
COMMON/SAVEV/ DMAGS, IDMAG
COMMON/KOUNT/ NNODE, INDEST, NUDISP, NWCIISP
COMMON/VALUES/ NVALUS
COMMON/CASEID/ 1DCASE
DIMENSION ZZZ(NZ),DISPD(5,3,NON),ABCD1(10),ABCD2(10),ABCD3(10),
LABCD4(10)
NAMELIST/PICT/, KHOHZ,KVERT,PHI,THETA,Psi,NEWFR,ISCALE,
1PLOTSZ,XORGN, YORGN,PSCALE,NOTAT,KDISP, IDMAG,DMAGS, KODE,
2KSYMXY,ZKSYMX,ZKSYMY,ZXMAX,YMAX,XXMIN,YYMAX,XLMIN,XLHT,
3YYMIN,ZZMIN,NDMAX,NDMIN,NELMAX,NELMIN,XLHT

C *** TO ZERO NODE AND ELEMENT SUMMATION COUNTERS
      ILOOP = 0
      NNODE = 0
      YPMAX=0.0

C *** TO DEFINE THE ORIGIN AND OPEN PLOTING DATA SETS
      CALL CALCMF
      CALL CALPLT(-1.0,0,0,0,-3)
      CALL CALPLT(1.0,6,C,-3)
      500 CONTINUE
      REWIND 10
      WRITE(6,8)
      8 FORMAT(1H1)

C *** TO READ TITLE CARD FOR RUN
      READ(5,9004,END=999) (ABCD1(I),I=1,10),(ABCD2(I),I=1,10)
      9004 FORMAT(20A4)
      WRITE(6,9006) (ABCD1(I),I=1,10),(ABCD2(I),I=1,10)
      9006 FORMAT(1//,20X,20A4,/)
      CALL INITIAL

C *** TO PLOT THE TITLE CARD AT THE BEGINING OF THE PLOT
      CALL CALPLT(0.3,1.62,3)
      CALL CALPLT(0.0,0.62,2)
      CALL CALPLT(0.0,0,2)
      CALL CALPLT(0.0,0,0,2)
      CALL NOTATE(0.8,0.41,0.21,ABCD1,0.0,40)
      CALL NOTATE(0.8,0.10,0.21,ABCD2,0.0,40)
      CALL CALPLT(0.0,1.62,YSPACE/2.0,-3)

C *** TO SET POINTERS FOR BLANK COMMON STORAGE ZZZ SUBROUTINES
C   (WITH INTEGER NAMES CF ARRAYS USED IN CALLED SUBROUTINES)

```

```

C
      NUMPT = 1
      XPT = NUMPT+NNDEST
      YPT = XPT+NNDEST
      ZPT = YPT+NNDEST
      UPT = ZPT+NNDEST
      IF(NUDISP.EQ.0) VPT = UPT+1
      IF(NUDISP.NE.0) VPT = UPT+NNDEST
      IF(NVDISP.EQ.0) WPT = VPT+1
      IF(NVDISP.NE.0) WPT = VPT+NNDEST
      IF(NWDISP.EQ.0) NEND = WPT+1-1
      IF(NWDISP.NE.0) NEND = WPT+NNDEST-1
      WRITE(6,15) NEND
15 FORMAT(' //'*20X,'BLANK COMMON STORAGE ZZZ REQUIRES AT LEAST ',I6,
     1, 'LOCATIONS FOR THIS CASE.//')
      IF(KGEOM.EC.1) CALL GEOM1
      1(ZZZ(NUMP),ZZZ(XPT),CALL GEOM1)
      1(ZZZ(NUMP),EC.2) CALL GEOM2
      1(ZZZ(NUMP),ZZZ(XPT),CALL GEOM2)
      1(FKGEOM.EQ.9) CALL GEOM9
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      1(CALL PNTOL,1,ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      600 CONTINUE
      IF(IIDCASE.EQ.0) GO TO 650
      READ(5,9004,END=999) (ABCD3(I),I=1,10), (ABCD4(I),I=1,10)
      999 WRITE(6,9006) (ABCD3(I),I=1,10)
650 CONTINUE
      CALL ZERO(1)
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      1(IF(KDATA.EQ.1) CALL DATA1
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      1(IF(KDATA.EQ.5) CALL DATA5
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      1(IF(KDATA.EQ.9) CALL DATA9
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      2DISPD,ACN)
      2IF (NUDISP.EQ.0.AND. NVDISP.EQ.0.AND. NWDISP.EQ.0) GO TO 700
      CALL PNTOUT(2)
      1(ZZZ(NUMP),ZZZ(XPT),ZZZ(YPT),ZZZ(UPT),ZZZ(VPT),ZZZ(WPT))
      700 CONTINUE
      IF(KPLOT.EQ.4.AND. ILLOOP.NE.0) GO TO 6000
      WRITE(6,1000)
      FORMAT(' //')
      READ(5,PICT)
      WRITE(6,PICT)
      6000 CONTINUE
      CALL DSCALE

```

```

1(ZZZ( NUMPT ), ZZZ(XPT), ZZZ(YPT), ZZZ(ZPT), ZZZ(UPT), ZZZ(VPT), ZZZ(WPT) )000003750
CALL BOUND
1(ZZZ( NUMPT ), ZZZ(XPT), ZZZ(YPT), ZZZ(ZPT), ZZZ(UPT), ZZZ(VPT), ZZZ(WPT) )000003760
1(IF(ISCALE,NE,0) CALL RCTAT
CALL PLTDX
1(ZZZ( NUMPT ), ZZZ(XPT), ZZZ(YPT), ZZZ(ZPT), ZZZ(UPT), ZZZ(VPT), ZZZ(WPT) )000003770
1(ILoop=1,LOC_P+1
GO TO (70C,600),KODE
C
C *** TO PLOT TITLE ON TOP OF GRAPH IF KODE = 3
C *** TO PLOT TITLE ON TOP AND CLOSE PLOTING DATA SETS IF KODE = 0
CALL CALPLT(0.,0.,YMAX+YSPACE/2.0,-3)
CALL CALPLT(0.,0.,1.0,2)
CALL CALPLT(0.,0.,1.62,2)
CALL CALPLT(9.0,1.62,2)
CALL NOTATE(0.8,1.31,21,ABCD1,0,0,40)
CALL NOTATE(0.8,1.0,21,ABCD2,0,0,40)
CALL CALPLT(0.,0.,1.62+YSPACE,-3)
1Loop=0
IF(KODE.EQ.3) GO TO 500
WRITE(6,9008)
FORMAT('/*5X,*TERMINATION NORMAL DUE TO KODE = 0 */')
9008 CALL PSTOP
RETURN
995 CALL ERROR(12)
END
SUBROUTINE PSTOP
C
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*** TO TERMINATE JOB
*** THIS SUBROUTINE IS CALLED BY ERROR AND PSAPL IN BOTH CASES
*** PLOTTER PEN HAS BEEN RETURNED TO THE ORIGIN AND PLOTTER ADVANCED.
COMMON/CONTRL/ KGEOM,KDATA,PHI,THETA,KSYMXY,KSYMXZ,KSYMZ,NOTAT,XLHT,
1KHORZ,KVERT,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
2PSCALE,KDISP,DMAG,KODE
CALL PLTCE
STOP
END
SUBROUTINE INITAL

```

```

C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C *** TO SET UP VALUES FOR CONTROL PARAMETERS
C     CALLED BY PSAPI
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
COMMON/C DATA/NTIME,NTLC
COMMON/CONT RL/KGEOM,KDATA,KPLOT,KSYMXY,KSYMZZ,NOTAT,XLHT,
1KHORZ,KVERT,PHI,THETA,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
2PSCALE,KU1SF2,DMAKCODE
COMMON/LIMITS,XXMAX,YYMAX,ZZMAX,XXMIN,YYMIN,ZZMIN,NDMIN,
1NELMAX,NELMIN
COMMON/C ORGN/YPMAX,YSFACE,PSIZE
COMMON/SAVEY/DMAGS,TDAG
COMMON/KOUNT/NNODE,NDEST,NUDISP,NWDISP
COMMON/SEQUENCE/I
COMMON/VALUES/NVALUS
COMMON/CASEID/IDCASE
NAMELIST/OPTION/NNODEST,NUDISP,NWDISP,NWDISP,NVSPAC E,PSIZE, IDCASE
1KGEO M,KDATA,NVALUS,IRES EQ,KPLOT,YSPACE,PSIZE, IDCASE
C *** DESCRIPTION OF VALUES IN OPTION GIVEN IN SUBROUTINE DOCMNT
C     CCCCCCCCCCCC
C *** TO SET DEFAULT VALUES FOR EOPTION
NNODEST = 200
NUDISP=0
NWDISP=0
NWDISP=0
KGEO M=9
KDATA=9
NTIME=0
NVALUS = 0
IRES EQ = 1
KPLOT = 1
YSPACE=2.0
PSIZE=5.0
IDCASE = 0
C *** TO SET DEFAULT VALUES FOR EPICT
KHORZ = 1
KVERT = 2
CCCCCCCC

```

```

C00004730
C00004740
C00004750
C00004760
C00004770
C00004780
C00004790
C00004800
C00004810
C00004820
C00004830
C00004840
C00004850
C00004860
C00004870
C00004880
C00004890
C00004900
C00004910
C00004920
C00004930
C00004940
C00004950
C00004960
C00004970
C00004980
C00004990
C00005000
C00005010
C00005020
C00005030
C00005040
C00005050
C00005060
C00005070
C00005080
C00005090
C00005100
C00005110
C00005120
C00005130
C00005140
C00005150
C00005160
C00005170
C00005180
C00005190
C00005200

PHI = 0.0
THETA = 0.0
NEWFR = 0.1
ISCALE = 1
PLOTSZ = 10.0
XORGN = 0.0
YORGN = 0.0
PSCALE = 1.0
NOTAT = 0
XLHT = 0.1400
KDISP = 0
IDMAG = 2
IDMAGS = 1.0
KSYMXY = 0.0
KSYMXZ = 0.0
KSYMYZ = 0.0
XXMAX = 1.0E20
YYMAX = 1.0E20
ZZMAX = 1.0E20
XXMIN = -1.0E20
YYMIN = -1.0E20
ZZMIN = -1.0E20
NDMAX = 99999
NDMIN = 0
NELMAX = 999999
NELMIN = 0
KODE = 0
READ(5,OPTION,END=995)
901C WRITE(6,9010)
FORMAT(//)
WRITE(6,OPTION)
WRITE(6,9010)
RETURN
999 CALL ERROR(3)
RETURN
END
SUBROUTINE BOUND( NUMPT, XPT, YPT, ZPT, UPT, VPT, WPT )
* * * * *
*** TO DETERMINE MAXIMUM DIMENSIONAL LIMITS OF BODY FOR USE
*** IN SCALING PLOT
*** CALLED BY PSAPI
* * * * *
COMMON/CUNTRL/ KGECM,KDATA,KPLOT,KSYMXZ,KSYMYZ,NOTAT,XLHT,

```

```

1 KHDRZ : KVERT, PHI, THETA, PSI, NEWFR, ISCALE, PLOTSZ, XORGN, YORGN,
2 PSCALE, KDISP, DMAG, KODE
COMMON /LIMITS/ XXMAX, YYMAX, ZZMAX, XXMIN, YYMIN, ZZMIN, NDMIN,
1 NELMAX, NELMIN
COMMON /KOUNT/ NNODE, NNCES, XYZMAX(3), XYZMIN(3),
DIMENSION NUMPT(1), XPT(1), YPT(1), ZPT(1), VPT(1), WPT(1)
DIMENSION NODE(20)
DO 5 I=1,3
XYZMIN(1) = +1.0E20
XYZMAX(1) = -1.0E20
5 CONTINUE
REWIND 10
100 CONTINUE
READ(10,END=1000) NEND,NUMEL,(NODE(I),I=1,NEND)
IF (NUMEL .LT. NELMIN .OR. NUMEL.GT.NELMAX) GO TO 100
DO 10 I=1,NEND
ND = NODE(I)
IF (NODE(I).EQ.0) GO TO 10
IF (NODE(ND).LT.NDMIN.CR.NUMPT(ND).GT.NDMAX) GO TO 100
CONTINUE
DO 20 I=1,NEND
IF (NODE(I).EQ.0) GO TO 20
ND = NODE(I)
IF (XPT(ND).GT.XXMAX) GO TO 20
IF (XPT(ND).LT.XXMIN) GO TO 20
IF (YPT(ND).GT.YYMAX) GO TO 20
IF (YPT(ND).LT.YYMIN) GO TO 20
IF (ZPT(ND).GT.ZZMAX) GO TO 20
IF (ZPT(ND).LT.ZZMIN) GO TO 20
IF (XPT(ND).GT.XYZMAX(1)) XYZMAX(1) = XPT(ND)
IF (XPT(ND).LT.XYZMIN(1)) XYZMIN(1) = XPT(ND)
IF (YPT(ND).GT.XYZMAX(2)) XYZMAX(2) = YPT(ND)
IF (YPT(ND).LT.XYZMIN(2)) XYZMIN(2) = YPT(ND)
IF (ZPT(ND).GT.XYZMAX(3)) XYZMAX(3) = ZPT(ND)
IF (ZPT(ND).LT.XYZMIN(3)) XYZMIN(3) = ZPT(ND)
20 CONTINUE
GO TO 100
1000 CONTINUE
DO 300 I=1,3
IF (I.EQ.1.AND.KSYMYZ.NE.1) GO TO 300
IF (I.EQ.2.AND.KSYMXY.NE.1) GO TO 300
IF (I.EQ.3.AND.KSYMMX.NE.1) GO TO 300
XYZBIG = ABS(XYZMAX(I))
IF (ABS(XYZWIN(I).GT.XYZBIG) XYZBIG = ABS(XYZMIN(I)))
XYZMAX(I) = XYZBIG
XYZMIN(I) = -XYZBIG
300 CONTINUE

```

```

      RETURN
      END
      SUBROUTINE ZEROD(NUMPT,XPT,YPT,ZPT,UPT,VPT,WPT)
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C *** INITIALIZES ALL DISPLACEMENTS TO ZERO.
C *** CALLED BY FSAPI
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
COMMON/KOUNT/ NNODE,NNODE,ANDEST,NUDISP,NWDISP
DIMENSION NUMPT(1),XPT(1),YPT(1),ZPT(1),UPT(1),VPT(1),WPT(1)
IF(NUDISP.EQ.0) GO TO 200
DO 150 I=1,NUDISP
  UPT(I)=0.0
150 CONTINUE
IF(NVDISP.EQ.0) GO TO 300
DO 250 I=1,NVDISP
  VPT(I)=0.0
250 CONTINUE
IF(NWDISP.EQ.0) GO TO 400
DO 350 I=1,NWDISP
  WPT(I)=0.0
350 CONTINUE
400 CONTINUE
      RETURN
      END
      SUBROUTINE PNTOUT(IOUT,NUMPT,XPT,YPT,ZPT,UPT,VPT,WPT)
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C *** FOR PRINTED OUTPUT OF INFORMATION IN BLANK COMMON - ZZZ
C *** CALLED BY FSAPI
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
COMMON/KOUNT/ NNODE,NNODE,ANDEST,NUDISP,NWDISP
DIMENSION NUMPT(1),XPT(1),YPT(1),ZPT(1),UPT(1),VPT(1),WPT(1)
DIMENSION NODE(20)
GO TO (1000,2000), ICUT
1000 CONTINUE
C *** FOR OUTPUT OF GEOMETRY INFORMATION
      WRITE(6,16)
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *

```

```

16 FORMAT(//,5X,'GRID POINT INFORMATION',//)
17 WRITE(5X,'RESEQUENCED',4X,'USER INPUT',/
18 15X,'GRID PCINT',5X,'GRID PCINT',/
25X,'NUMBER',9X,'NUMBER',13X,'X',14X,'Y',14X,'Z',//)
DO 30 I=1,NODE
  WRITE(6,18) I,NUMPT(I),XPT(I),YPT(I),ZPT(I)
30 CONTINUE
19 WRITE(5X,'ELEMENT INFORMATION - WITH RESEQUENCED GRID POINTS')
1- //,
20 WRITE(6,9008)
9008 FORMAT(1X,'RESEQUENCED',4X,'USER INPUT',25X,'GRID POINTS',/
11X,'ELEMENT',8X,'ELEMENT',/,/
21X,'NUMBER',9X,'NUMBER',7X,/,11 12 13 14 1 15 2 16 3 17 4 18 5 19 6 20 7 //)
3 8 9 10
REWIND 10
I = 0
35 CONTINUE
I = I+1
READ(10,ENC=999),NEND,NUMEL,(NODE(J),J=1,NEND)
IF(NEND.EQ.12) GO TO 40
WRITE(6,9010) I,NUMEL,(NODE(J),J=1,NEND)
9010 FORMAT(1X,14,1X,14,9X,2015)
GO TO 35
40 WRITE(6,9010) I,NUMEL,(NODE(J),J=1,4),(NODE(J),J=9,12)
GO TO 35
2000 CONTINUE
C *** FOR OUTPUT OF DISPLACEMENT DATA
C
210 WRITE(6,210)
210 FORMAT(//,5X,'DISPLACEMENTS TO BE PLOTTED',//)
DO 230 I=1,NNODE
  U = 0.0
  V = 0.0
  W = 0.0
  IF(NWDISP.NE.0) U = LPT(I)
  IF(NWDISP.NE.0) V = VPT(I)
  IF(NWDISP.NE.0) W = WPT(I)
  WRITE(6,18) I,NUMPT(I),U,V,W
230 CONTINUE
999
END
SUBROUTINE PLOTX( NUMPT,XPT,YPT,ZPT,UPT,VPT,WPT )

```

```

* * * * * FOR GENERATING PLOTS.
* * * CALLED BY PSAPI

COMMON/CONTRL/ KGEOM,KDATA,KPLOT,KSYMMXZ,KSYMMYZ,NOTAT,XLHT,
1KHORZ,KVERT,PHI,THETA,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
2PSCALE,KDISP,DMAG,KODE,PLTSZ,XMAX,YMAX,ZMAX,XXMIN,YYMIN,ZZMIN,
COMMON/LIMITS/XMAX,NEWIN,
INELMAX,NEWIN,
COMMON/XYZLIM/XYZMAX(3),XYZMIN(3),
COMMON/CORGN/YMAX,YSPACE,PSIZE,
COMMON/GLOOP/ILLOOP,
COMMON/ABLK/A(3,3),
COMMON/KOUNT/NODE,NNODE,NUDEST,NUDISP,NWDISP,
COMMON/PDELS/DELX,DELY
DIMENSION NUMPT(1),XPT(1),YPT(1),ZPT(1),WPT(1)
DIMENSION NODE(20),X(20),Y(20),Z(20),XDISP(20),YDISP(20),
1ZDISP(20),XRDT(20),YRDT(20),XP(21),YP(21)

C *** TO MAKE ALL GRID POINT NUMBERS NEGATIVE
      DO 50 I=1,NNODE
      IF(NUMPT(I).GT.0) NUMPT(I)=-NUMPT(I)
      50 CONTINUE

C *** TO MAKE FRAME CHANGE IF NEWFR = 1 AFTER NAMELIST OPTION
C *** NO FRAME CHANGE CN FIRST PLOT AFTER NAMELIST OPTION
      YMOVE=0.0
      IF(ILLOOP.EQ.0) GO TO 70
      IF(NEWFR.EQ.1) YMOVE=YMAX+YSPACE
      70 CALL CALPLT(0,0,MOVE,-3)
      GO TO (710,710,703,710),KPLOT
      703 CONTINUE
      IF(NEWFR.EQ.1) CALL NFRAME
      710 CONTINUE
      IF(ISCALE.NE.0) DELX=0.0
      IF(ISCALE.NE.0) DELY=0.0
      IF(ISCALE.EQ.1) CALL XYSCAL
      CALL CALPLT(XORGN,YORGN,-3)
      XSHIFT=0.0
      YSHIFT=0.0
      ZSHIFT=0.0
      YMAX=-1.0E20
      00007100
      00007110
      00007120

```

C

```

C *** LOOPS TO ACCOUNT FOR SYMMETRY
C
ZSIGN = +1.0
DO 500 II=1,2
IF(II-EQ.2.AND.KSYMXY.NE.1) GO TO 500
ZSIGN = -1.0
DO 510 JJ=1,2
IF(JJ-EQ.2.AND.KSYMXY.EQ.1) ZSIGN = -1.0
DO 520 KK=1,2
IF(KK-EQ.2.AND.KSYMYZ.EQ.1) GO TO 510
ZSIGN = +1.0
DO 530 KK=1,2
IF(KK-EQ.2.AND.KSYMYZ.NE.1) GO TO 520
ZSIGN = -1.0
C *** TO DETERMINE PROJECTED COORDINATES OF ELEMENTS
C
REWIND 10
CONTINUE
READ(10,END=1000) NEND,NUMEL,(NODE(J),J=1,NEND)
IF(NUML.EQT.NELMIN.OR.NUMEL.GT.NELMAX) GO TO 100
DO 10 I=1,NEND
ND = NODE(I)
IF(NODE(I).EQ.0) GO TO 10
C *** TO MAKE GRID POINT NUMBERS CONNECTED BY ELEMENTS POSITIVE
NUMPT(ND) = ABS(NUMPT(ND))
IF(NUMPT(ND).LT.NDMIN.OR.NUMPT(ND).GT.NDMAX) GO TO 100
CONTINUE
I = KVERT
DO 20 N=1,NEND
IF(NODE(N).EQ.0) GO TO 20
ND = NODE(N)
IF(XPT(ND).GT.XXMAX) GO TO 100
IF(YPT(ND).LT.XXMIN) GO TO 100
IF(YPT(ND).GT.YYMAX) GO TO 100
IF(ZPT(ND).LT.ZZMIN) GO TO 100
IF(ZPT(ND).GT.ZZMAX) GO TO 100
XDISP(N) = 0.0
YDISP(N) = 0.0
ZDISP(N) = C.0
IF(KDISP.EC.1.AND.NUCISP.NE.0) XDISP(N) = UPT(ND)
IF(KDISP.EQ.1.AND.NUDISP.NE.0) YDISP(N) = VPT(ND)
IF(KDISP.EQ.1.AND.NWDISP.NE.0) ZDISP(N) = WPT(ND)
IF(KDISP*SIGN*(XPT(ND)+XDISP(N)*DMAG+XSHIFT)/PSCALE
X(N) = XSIGN*(YPT(ND)+YDISP(N)*DMAG+YSHIFT)/PSCALE
Y(N) = YSIGN*(ZPT(ND)+ZDISP(N)*DMAG+ZSHIFT)/PSCALE

```

```

Z(N) = Z SIGN*(ZPT(ND)+ZDISP(N)*DMAG+ZSHIFT)/PSCALE
20 CONTINUE
IF(KDISP.EQ.2) CALL XPLOD(NEND,X,Y,Z,NODE)
XCENT = 0.0
YCENT = 0.0
FND=0.0
DO 25 N=1,NEND
IF(NODE(N).EQ.0) GO TO 25
XROT(N) = A(I,1)*X(N)+A(I,2)*Y(N)+A(I,3)*Z(N)
YROT(N) = A(J,1)*X(N)+A(J,2)*Y(N)+A(J,3)*Z(N)
IF(N.GT.8) GO TO 24
FND=FND+1.0
XCENT = XCENT+XROT(N)
YCENT = YCENT+YROT(N)
CONTINUE
24 XROT(N) = XROT(N)+DELY
YROT(N) = YROT(N)+DELY
IF(YROT(N).GT.YPMAX) YPMAX=YROT(N)
25 CONTINUE
IF(NOTAT.NE.2) GO TO 29
XCENT = XCENT/FND-(6.0/7.0)*XLHT
YCENT = YCENT/FND-XLHT/2.0
XCENT = XCENT+DELY
YCENT = YCENT+DELY
AL = NUMEL
*** SUBROUTINE NUMBER APPLIES ONLY TO CALCOMP
CONTINUE
IF(NOTAT.EQ.2) CALL NUMBER(XCENT,YCENT,XLHT,AL,0.0,-1)
C *** TO PLOT ELEMENTS
C
IF(NEND.EQ.2) GO TO 280
IF(NEND.EQ.4) GO TO 300
IF(NEND.EQ.8) GO TO 320
IF(NEND.EQ.12) GO TO 340
IF(NEND.EQ.20) GO TO 340
CALL ERROR(4)
C *** TO PLOT 2 NODE ELEMENT
C
280 CONTINUE
CALL CALPLT(XROT(1),YROT(1),3)
CALL CALPLT(XROT(2),YROT(2),2)
GO TO 430
C *** TO PLOT 3 AND 4 NODE PLANE ELEMENT
C
300 CONTINUE

```

```

CALL CALPLT(XROT(1),YROT(1),3)
DO 305 NP=2,NEND
CALL CALPLT(XROT(NP),YROT(NP),2)
CONTINUE
CALL CALPLT(XROT(1),YROT(1),2)
GO TO 430
C *** TO PLOT 8 NODE 3-D BRICK
C
320 CONTINUE
LP=1
DO 330 NP=2,6,4
NP2=NP+2
CALL CALPLT(XROT(LP),YROT(LP),3)
DO 325 NP=NP,NP2
NP2=NP+2
CALL CALPLT(XROT(MP),YROT(MP),2)
CONTINUE
CALL CALPLT(XROT(LP),YROT(LP),2)
LP=LP+4
CONTINUE
330 DO 335 NP=1,4
NP4=NP+4
CALL CALPLT(XROT(NP),YROT(NP),3)
CALL CALPLT(XROT(NP4),YROT(NP4),2)
CONTINUE
335 GO TO 430
C *** TO PLOT VARIABLE 4-8 NODE PLANE AND 8-20 NOCE BRICK ELEMENTS
C *** NOTE SUBROUTINE LINE ONLY APPLIES TO THE CALCOMP PLOTTER
C
340 CONTINUE
LP=1
KP=8
DO 365 NP=2,6,4
NP2=NP+2
CALL CALPLT(XROT(LP),YROT(LP),3)
DO 345 NP=NP,NP2
NP2=NP+2
KP=KP+1
N=2
CALL WHERE(XP(1),YP(1))
XP(2)=XROT(MP)
YP(2)=YROT(MP)
XP(3)=XROT(KP)
YF(3)=YROT(KP)
IF(NODE(KP).NE.0) CALL CURVE(XP,YP,N,1,1)
CALL LINE(XP,YP,N,1,1)
CONTINUE
345 KP=KP+1

```


AD-A046 385

NAVAL POSTGRADUATE SCHOOL MONTEREY CALIF  
A FINITE ELEMENT PREPROCESSOR FOR SAP IV AND ADINA.(U)  
SEP 77 A E KIBLER

F/G 9/2


UNCLASSIFIED

2 OF 2  
ADA  
046 385

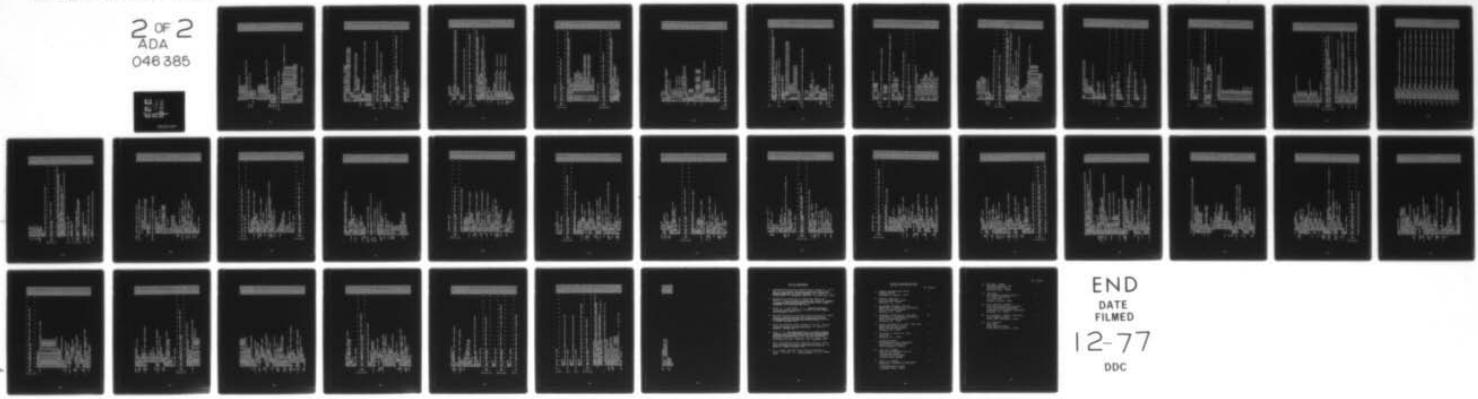

NL

END  
DATE  
FILED  
12-77  
DDC

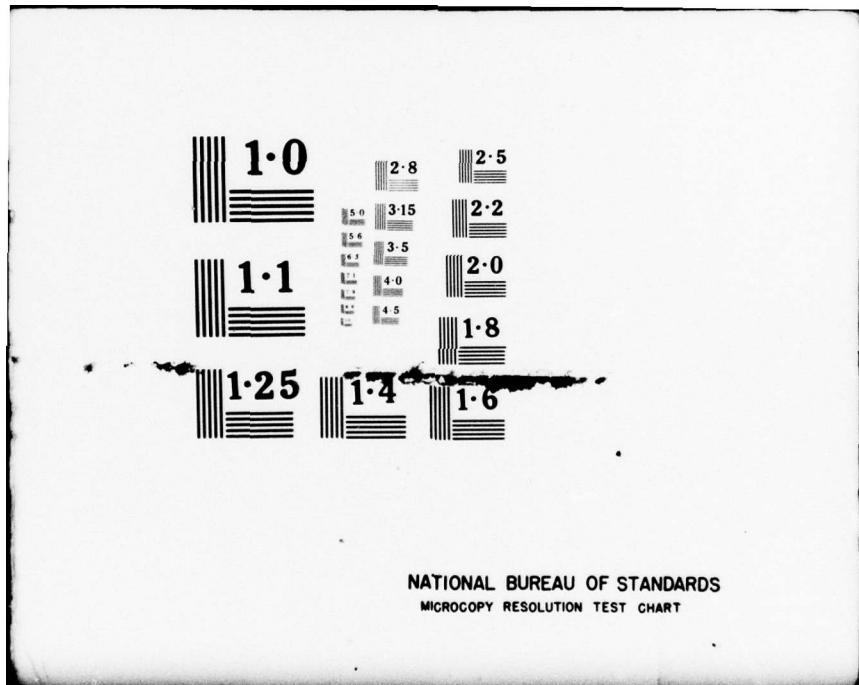

NATIONAL BUREAU OF STANDARDS  
MICROCOPY RESOLUTION TEST CHART

```

N=2      WHERE(XP(1),YP(1))
CALL    XRCT(LP)
XP(2)=XRCT(LP)
YP(2)=YRCT(LP)
XP(3)=XRCT(KP)
YP(3)=YRCT(KP)
IF(NODE(KP).NE.0) CALL CURVE(XP,YP,N)
CALL LINE(XP,YP,N,1,1)
LP=LP+4
IF(NEND.EQ.12) GO TO 430
355     CONTINUE
390     NP=14
NP4=NP+4
KP=NP+16
N=2      XP(1)=XROT(NP)
YP(1)=YROT(NP)
XP(2)=XROT(NP4)
YP(2)=YROT(NP4)
XP(3)=XROT(KP)
YP(3)=YROT(KP)
IF(NODE(KP).NE.0) CALL CURVE(XP,YP,N)
CALL LINE(XP,YP,N,1,1)
CONTINUE
390     CONTINUE
430     GO TO 100
1000    CONTINUE
IF(KDISP.NE.3) GO TO 650
600     CONTINUE
C *** TO PLOT VECTORS AT GRID POINTS
C
DO 601 ND=1,NNODE
IF(NUPT(ND).LE.0) GO TO 601
IF(NUPT(ND).LT.NDMIN.OR.NUMPT(ND).GT.NDMAX) GO TO 601
IF(XPT(ND).LT.XYZMAX(1)) GO TO 601
IF(YPT(ND).LT.XYZMIN(1)) GO TO 601
IF(YPT(ND).LT.XYZMAX(2)) GO TO 601
IF(ZPT(ND).LT.XYZMAX(3)) GO TO 601
IF(ZPT(ND).LT.XYZMIN(3)) GO TO 601
IF(ZPT(ND).LT.XYZMIN(3)) GO TO 601
X(1)=XSIGN*(XP(ND)+XSHIFT)/PSCALE
Y(1)=YSIGN*(YP(ND)+YSHIFT)/PSCALE
Z(1)=ZSIGN*(ZP(ND)+ZSHIFT)/PSCALE
XDISP(1)=0.0
YDISP(1)=0.0
ZDISP(1)=0.0
IF(NUDISP.NE.0) XDISP(1)=UPT(ND)

```

```

IF(NWDISP*NE.0) YDISP(1) = VPT(ND)
IF(NWDISP*NE.0) ZDISP(1) = WPT(ND)
X(2) = XSIGN*(XP(1)*DISP(1)+XP(1)*DMAG+XSHIFT)/PSCALE
Y(2) = YSIGN*(YP(1)*DISP(1)+YP(1)*DMAG+YSHIFT)/PSCALE
Z(2) = ZSIGN*(ZP(1)*DISP(1)+ZP(1)*DMAG+ZSHIFT)/PSCALE
I = KHQT
J = KVET
DO 605 N=1,2
XROT(N) = A(I,1)*X(N)+A(I,2)*Y(N)+A(I,3)*Z(N)
YROT(N) = A(J,1)*X(N)+A(J,2)*Y(N)+A(J,3)*Z(N)
XROT(N) = XROT(N)+DELY
YROT(N) = YROT(N)+DELY
CONTINUE
605 XARW = Q**0.6
YARW = XARW**3.0
CALL GARRY(XROT(1),YROT(1),XROT(2),YROT(2),1,XARW,YARW)
601 CONTINUE
520 CONTINUE
510 CONTINUE
500 CONTINUE
C *** TO PLOT NODE POINT NUMBERS
C IF(NOTAT.EQ.1) CALL NDLET( NUMPT,XPT,YPT,ZPT,UPT,VPT,WPT )
CALL CALPLT(-XORGN,-YORGN,-Z)
C *** TO MAKE ALL GRID POINT NUMBERS POSITIVE AGAIN
C DO 1100 I=1,NNODE
NUMPT(I)=IABS(NUMPT(I))
1100 CONTINUE
RETURN
END
SUBROUTINE CURVE(XP,YP,N)
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** THIS SUBROUTINE INTERPOLATES ALONG THE EDGES OF ISOPARAMETRIC
C *** ELEMENTS USING SHAPE FUNCTIONS CALLED BY PLOTX
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C DIMENSION XP(1),YP(1)
DIMENSION X(3),Y(3)
DO 100 I=1,3
X(I)=XP(I)

```

```

100 Y(I)=YPT(I)
      CONTINUE
      R=-1.0
      DO 200 I=1,21
      YP(I)=Y(I)*R*(R-1.0)/2.0-Y(3)*(R+1.0)*(R-1.0)*(R+1.0)/2.0
      XP(I)=X(I)*R*(R-1.0)/2.0-X(3)*(R+1.0)*(R-1.0)*(R+1.0)/2.0
      R=R+.1
      CONTINUE
      N=21
      RETURN
      END
      SUBROUTINE DSCALE(NUWPT,XPT,YPT,ZPT,UPT,VPT,WPT)
      *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
      *** THIS SUBROUTINE DETERMINES THE SCALE FACTOR FOR DISPLACEMENTS
      *** CALLED BY PSAP1
      *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
      COMMON/CONTROL/ KGEOM,KDATA,KPLOT,KSYMXY,KSYMXX,KSYMYZ,NOTAT,XLHT,
      KHORZ,KVERT,PHITHETA,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
      2PSCALE,KDISP,DMAG,KODE
      COMMON/SAVEV/ DMAGS, IDMAG
      COMMON/KOUNT/ NNODE,NNDEST,NUDISP,NWCISP
      DIMENSION NUWPT(1),XPT(1),YPT(1),ZPT(1),UPT(1),VPT(1),WPT(1)
      IF(KDISP.EQ.0.OR.KDISF.EQ.2) GO TO 10
      GO TO (10,20), IDMAG
      10 CONTINUE
      DMAG = DMAGS
      GO TO 30
      20 CONTINUE
      DMAX = 0.0
      DO 100 I=1,NNODE
      IF(NUDISP.EC.0) GO TO 500
      IF(ABS(UPT(I)).GT.DMAX) DMAX = ABS(UPT(I))
      500 CONTINUE
      IF(NUDISP.EQ.0) GO TO 501
      IF(ABS(VPT(I)).GT.DMAX) DMAX = ABS(VPT(I))
      501 CONTINUE
      IF(NUDISP.EQ.0) GO TO 502
      IF(ABS(WPT(I)).GT.DMAX) DMAX = ABS(WPT(I))
      502 CONTINUE
      100 CONTINUE
      DMAG = DMAGS/DMAX
      30 CONTINUE
      RETURN
      END

```

```

SUBROUTINE ROTAT
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C*** SETS UP COEFFICIENTS OF ROTATION MATRIX
C*** CALLED BY FSAPI
C
COMMON/KONTROL/KGEOM,KDATA,KPLOT,KTHETA,PSI,NEWFR,ISCALE,PLOTSZ,XLHT,
1KHORZ,KVERT,PHI,DISP,DMAG,KODE
2PSCALE,KDISP,DMAG,KCODE
COMMON/ABLK/A(3,3)
COMMON/ABLK/A(3,3)
PI = 3.1415926536
SINPHI = SIN(PHI)*PI/180.0
COSPHI = COS(PHI)*PI/180.0
SINTHE = SIN(THETA)*PI/180.0
COSTHE = COS(THETA)*PI/180.0
SINPSI = SIN(PSI)*PI/180.0
COSPSI = COS(PSI)*PI/180.0
A(1,1) = COSPSI*SINTHE*COSPHI
A(1,2) = SINPSI*SINTHE*COSPHI+SINPHI*SINPSI
A(1,3) = SINPSI*COSTHE*COSPHI+COSPSI*SINPHI
A(2,1) = SINPSI*SINTHE*COSPHI+SINPHI*SINPSI
A(2,2) = SINPSI*COSPHI*SINPSI+COSPHI*COSPSI
A(2,3) = SINPSI*SINTHE*COSPHI+SINPHI*COSPSI
A(3,1) = -SINTHE*COSPHI*SINPSI
A(3,2) = COSTHE*SINPHI
A(3,3) = COSTHE*COSPSI
RETURN
END
SUBROUTINE XYSCAL
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C*** TO DETERMINE SCALE FACTOR FOR MODEL GEOMETRY.
C*** CALLED BY PLOTX
C
COMMON/KONTROL/KGEOM,KDATA,KPLOT,KSYMMXX,KSYMMYY,KSYMMZZ,NOTAT,XLHT,
1KHORZ,KVERT,PHI,THETA,PSI,NEWFR,ISCALE,PLOTSZ,XLHT,
2PSCALE,KDISP,DMAG,KODE
COMMON/XYLIM/XYZMAX(3),XYZMIN(3)
COMMON/CORGN,YPMAX,YSIZE
COMMON/ABLK/A(3,3)
COMMON/PDELS/DELX,DELY
I = KHORZ

```

```

J = KVERT
DMAX = 0.0
DO 5 N=1,3
YDUM = ABS(XYZMAX(N)-XYZMIN(N))
IF(YDUM.GT.DMAX) DMAX = YDUM
5 CONTINUE
PSCALE = DMAX/PLOTSZ
DO 10 L=1,2
DO 10 N=1,2
X = XYZMIN(1)
IF(L.EQ.2) X = XYZMAX(1)
Y = XYZMIN(2)
IF(M.EQ.2) Y = XYZMAX(2)
Z = XYZMIN(3)
IF(N.EQ.2) Z = XYZMAX(3)
XROT = A(I,1)*X+A(I,2)*Y+A(I,3)*Z
YROT = A(J,1)*X+A(J,2)*Y+A(J,3)*Z
IF(L*M*N.EQ.1) GO TO 30
10 CONTINUE
XRMIN = XROT
XRMAX = XROT
YRMIN = YROT
YRMAX = YROT
20 CONTINUE
XRMIN = XROT
XRMAX = XROT
YRMIN = YROT
YRMAX = YROT
30 CONTINUE
IF(XROT.GT.XRMAX) XRMAX = XROT
IF(XROT.LT.XRMIN) XRMIN = XROT
IF(YROT.GT.YRMAX) YRMAX = YROT
IF(YROT.LT.YRMIN) YRMIN = YROT
10 CONTINUE
XR = ABS(XRMAX-XRMIN)
IF(XR/PSCALE.GT.PSIZE) PSCALE = XR/PSIZE
XRMAX = XRMAX/PSCALE
YRMAX = YRMAX/PSCALE
XRMIN = XRMIN/PSCALE
YRMIN = YRMIN/PSCALE
DELX = -XRMIN
DELY = -YRMIN
XORGN = (PSIZE-XR/PSCALE)/2.0
RETURN
END
SUBROUTINE XPLCD(NEND,X,Y,Z,NODE)
* * * * *
C *** FOR GENERATING EXPLODED PLOTS.
C *** CALLED BY PLOTX

```

```

C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
COMMON/CONTRL/ KGEOM,KDATA,KPLOT,KSYMXY,KSYMZX,KSYMYZ,NOTAT,XLHT,
1KHORZ,KVERT,PHITHETA,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
2PSCALE,KDISP,DMAG,KODE
DIMENSION X(20),Y(20),Z(20),NODE(20)

C *** TO CALCULATE THE INCENTER OF TRIANGLES

IF(NODE(4).EQ.0) NEND=3
IF(NEND.NE.3) GO TO 20
10 CONTINUE
A = SQR((X(2)-X(3))**2+(Y(2)-Y(3))**2+(Z(2)-Z(3))**2)
B = SQR((X(1)-X(3))**2+(Y(1)-Y(3))**2+(Z(1)-Z(3))**2)
C = SQR((X(1)-X(2))**2+(Y(1)-Y(2))**2+(Z(1)-Z(2))**2)
AC1 = A/(A+B+C)
AC2 = B/(A+E+C)
AC3 = C/(A+B+C)
XOC = AC1*X(1)+AC2*X(2)+AC3*X(3)
YOC = AC1*Y(1)+AC2*Y(2)+AC3*Y(3)
ZOC = AC1*Z(1)+AC2*Z(2)+AC3*Z(3)
GO TO 190
20 CONTINUE

C *** TO CALCULATE THE CENTROID OF RODS, BARS, AND QUADS

XOC = 0.0
YOC = 0.0
ZOC = 0.0
FND=0.0
DO 100 I=1,NEND
11 IF(NODE(I).EQ.0) GO TO 100
FND=FND+1.0
XOC = XOC+X(I)
YOC = YOC+Y(I)
ZOC = ZOC+Z(I)
100 CONTINUE
101 XOC=XOC/FND
YOC=YOC/FND
ZOC=ZOC/FND
190 CONTINUE

C *** TO REDUCE THE SIZE OF THE ELEMENT
DO 200 I=1,NEND

```



```

XC = X2+(-S*YHEAD)
YC = Y2+(+C*YHEAD)
CALL CALPLT(XC,YC,2)
IF(NC.LT.5) GO TO 1000
XD = X2+(-S*(-YHEAD))
YD = Y2+(+C*(-YHEAD))
CALL CALPLT(XD,YD,2)
CONTINUE
CONTINUE PLT(X2,Y2,2)
1000
CONTINUE
CALL CALPLT(X2,Y2,3)
500C
RETURN
END
SUBROUTINE NDLET (NUMPT,XPT,YPT,ZPT,UPT,VPT,WPT)
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** FOR ANNOTATING GRID POINT NUMBERS ON PLOTS.
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
COMMON/CONTRL/KGEOM,KDATA,KPLOT,KSYMXY,KSYMZZ,NOTAT,XLHT,
1KHORZ,KVERT,PHI,THETA,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
2PSCALE,KDISF,DMAG,KOC,E
COMMON/LIMITS/XMAX,XMIN,YMAX,YMIN,XXMAX,XXMIN,ZZMAX,ZZMIN,NDMIN,
1NELMAX,NELMIN,XYZLIM/XYZMAX(3),XYZMIN(3)
COMMON/ABLK/A(3,3)
COMMON/KOUNT/NNODE,NDEST,NUDISP,NWDISP
COMMON/PDELS/DELX,DELY
DIMENSION NUMPT(1),XPT(1),YPT(1),ZPT(1),UPT(1),VPT(1),WPT(1)
D11 = KHORZ
D12 = KVERT
XSHIFT = 0.0
YSHIFT = 0.0
ZSHIFT = 0.0
DO 1500 I=1,NNODE
1F((NUMPT(I).LE.0)) GO TO 500
1F((NUMPT(I).LT.NDMIN)) OR. NUMPT(I).GT. NDMAX) GO TO 500
1F((XPT(I).LT.XYZMAX(1))) GO TO 500
1F((XPT(I).LT.XYZMIN(1))) GO TO 500
1F((YPT(I).LT.XYZMAX(2))) GO TO 500
1F((YPT(I).LT.XYZMIN(2))) GO TO 500
1F((ZPT(I).LT.XYZMAX(3))) GO TO 500
1F((ZPT(I).LT.XYZMIN(3))) GO TO 500
X = (XPT(I)+XSHIFT)/PSCALE
Y = (YPT(I)+YSHIFT)/PSCALE
Z = (ZPT(I)+ZSHIFT)/PSCALE

```

```

XROT = A(IJ,1)*X+A(IJ,2)*Y+A(IJ,3)*Z
YROT = A(JJ,1)*X+A(JJ,2)*Y+A(JJ,3)*Z
XL = XROT+XLHT/2.0
YL = YROT+YLHT/2.0
XL = XL+DELY
YL = YL+DELY
AL = NUMPT(I)
CALL NUMBER(XL,YL,XLHT,AL,0.0,-1)
500 CONTINUE
RETURN
END
SUBROUTINE NFRAME
CALLED BY PLOTX
RETURN
END
SUBROUTINE CCRT2
RETURN
END
C ****
***** ADAPT FOR NPS SYSTEM
***** CALLED BY PSAPI
* * * * *
SUBROUTINE CALCMP
COMMON/PLOT/CIBUFF(1024)
CALL PLOTS
RETURN
END
***** ADAPT FOR NPS SYSTEM
***** CALLED BY PSAPI/PLOT/X/GARROW/ERROR
* * * * *
SUBROUTINE CALPLT(X,Y,IPEN)
CALL PLOT(X,Y,IPEN)
RETURN
END
***** ADAPT FOR NPS SYSTEM
***** CALLED BY PSAPI

```

```

C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C   SUBROUTINE NOTATE(X,Y,HT,BCD,THETA,N)
C     DIMENSION BCD(1)
C     CALL SYMBOL(X,Y,HT,BCD,THETA,N)
C     RETURN
C   END
C   SUBROUTINE ELTYPE(MTYPE,KGEOM)
C     * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C
C***THIS SUBROUTINE CALLS OTHER ROUTINES TO READ ELEMENT CONNECTIVITY
C***MTYPE = ELEMENT TYPE
C***      1 - ADINA ELEMENTS
C***      2 - NONSAP ELEMENTS
C***      9 - SAP IV ELEMENTS
C***      12 - GEOM1/GEM2/GEM9/
C
C     * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C
C     IF(KGEOM.EQ.1) GO TO 20
C     IF(KGEOM.EQ.2) GO TO 40
C     GO TO (1,2,3,4,5,6,7,8,9,10,11,12), MTYPE
C
C     1 CALL TRUSS
C     2 GO TO 500
C     3 CALL BEAM
C     4 GO TO 600
C     5 CALL PLANE
C     6 CALL THREEED
C     7 GO TO 900
C     8 CALL SOL21
C     9 GO TO 900
C     10 CALL ERROR(1)
C     11 GO TO 900
C     12 CALL ERROR(1)

```

```

60 TO 900
20 CONTINUE
60 TO (21*22,23,24),MTYPE
21 CALL ADTRUS
22 CALL ADPLAN
23 GO TO 900
24 CALL AD3DEE
25 GO TO 500
26 CALL ADBEAM
27 GO TO 900
28 CONTINUE
29 GO TO (41*42,43),MTYPE
30 CALL NSTRUS
31 CALL NSPLAN
32 GO TO 900
33 CALL NS3DEE
34 RETURN
END

SUBROUTINE ERROR (N)
C * * * * *
C *** THIS SUBROUTINE TERMINATES THE PROGRAM DUE TO ERROR IN INPUT.
C *** ERROR ALSO ZEROS AND ADVANCES THE CALCOMP PLOTTER
C *** CALLED BY ELTYPE/PSAPI/INITAL/PLOTX/THREED/SOL21/ADTRUS/ADPLAN/
C *** AD3DEE/ADBEAM/NSTRUS/NSPLAN/NS3DEE/GEOM2/
C * * * * *
C COMMON/CORGN/ YPMAX, YSPACE, PSIZE
CALL CALPLT(0.0, YPMAX+6.0,-3)
GO TO (1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20),N
1 CONTINUE
1 WRITE(6,9001)
9001 FORMAT(//1X,'TERMINATION OCCURRED IN SUBROUTINE ELEMENT //')
1 IN INPUT DATA CANNOT BE PLOTTED' ELEMENT
C * * * * *
C 0000369000
C 0000370000
C 0000371000
C 0000372000
C 0000373000
C 0000374000
C 0000375000
C 0000376000
C 0000377000
C 0000378000
C 0000379000
C 0000380000
C 0000381000
C
2 CONTINUE
2 WRITE(6,9002)
9002 FORMAT(//1X,'ABNORMAL TERMINATION OCCURRED IN SUBROUTINE PSAPI //')
1 HECK VALUE OF KODE IN NAMELIST PICT. //)
GO TO 1000
3 CONTINUE
3 WRITE(6,9003)
9003 FORMAT(//1X,'ABNORMAL TERMINATION OCCURRED IN SUBROUTINE INITIAL //')
1- ATTEMPT TO READ NAMELIST OPTION. //)

```

```

        GO TO 1000
4    CONTINUE
      WRITE(6,9004)
      FORMAT(//,1X,'ABNORMAL TERMINATION OCCURRED IN PLOTX'//)
9004  FORMAT(100)
      GO TO 1000
5    CONTINUE
      WRITE(6,9005)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN THREED,ELEMENT CARD ERROR'//)
9005  FORMAT(100)
      GO TO 1000
6    CONTINUE
      WRITE(6,9006)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN SOL21,ELEMENT CARD ERROR'//)
9006  FORMAT(100)
      GO TO 1000
7    CONTINUE
      WRITE(6,9007)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN ADTRUS,ELEMENT CARD ERROR'//)
9007  FORMAT(100)
      GO TO 1000
8    CONTINUE
      WRITE(6,9008)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN ADPLAN,ELEMENT CARD ERROR'//)
9008  FORMAT(100)
      GO TO 1000
9    CONTINUE
      WRITE(6,9009)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN AD3DEE,ELEMENT CARD ERROR'//)
9009  FORMAT(100)
      GO TO 1000
10   CONTINUE
      WRITE(6,9010)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN ADBEAM,ELEMENT CARD ERROR'//)
9010  FORMAT(100)
      GO TO 1000
11   CONTINUE
      WRITE(6,9011)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN NSTRUS,ELEMENT CARD ERROR'//)
9011  FORMAT(100)
      GO TO 1000
12   CONTINUE
      WRITE(6,9012)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN NSPLAN,ELEMENT CARD ERROR'//)
9012  FORMAT(100)
      GO TO 1000
13   CONTINUE
      WRITE(6,9013)
      FORMAT(//,1X,'ABNORMAL TERMINATION IN NS3DEE,ELEMENT CARD ERROR'//)
9013  FORMAT(100)
      GO TO 1000
14   CONTINUE
      WRITE(6,9014)
      FORMAT(//,1X,'ABNORMAL TERMINATION NONSAP MESH CANNOT BE PLOTTED'//)
9014  FORMAT(100)
      GO TO 1000
15   CONTINUE
      GO TO 1000
16   CONTINUE

```

```

      GO TO 1000
17  CONTINUE
      GO TO 1000
18  CONTINUE
      GO TO 1000
19  CONTINUE
      GO TO 1000
20  CONTINUE
1000 CONTINUE
      CALL PSTOP
      RETURN
END
      SUBROUTINE GEOM9(NUMNP,XPT,YPT,ZPT,UPT,VPT,WPT)
      C *   *   *   *   *   *   *   *   *   *   *   *   *   *
      C *** GEOM9 READS SAP IV GEOMETRY DATA
      C *** CALLED BY PSAP1
      C *   *   *   *   *   *   *   *   *   *   *   *   *   *
      C COMMON/CONTRL/KGEOM,KDATA,KPLOT,KSYMMXY,KSYMMXZ,KSYMMYZ,NOTAT,XLHT,
      C KHORZ,KVERT,PHI,THETA,PSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
      C PSCALE,KDISP,DMAG,KODE
      C COMMON/KDISP,NNODE,NNODE,NDEST,NUDISP,NWDISP
      C COMMON/GCONT/NUMNP,NPAR(20),NELTYP,NUMEL
      C DIMENSION NUMPT(1),XPT(1),YPT(1),ZPT(1),UPT(1),VPT(1),WPT(1)
      C DATA CTEST/./
      C *** INSERT ROUTINE HERE
      C      READ(5,100) HED
100  FORMAT(5,100)
      C
      C *** READ MASTER CONTROL CARD
      C *** NUMNP = TOTAL NUMBER OF NODE POINTS
      C *** NELTYP = NUMBER OF ELEMENT GROUPS
      C
      C      READ(5,200) NUMNP,NELTYP
200  FORMAT(5,215)
      C      NNODE=NUMNP
      C
      C*****READ OR GENERATE NODAL POINT DATA
      C
      C      NOLD=0
      10 READ(5,9006) CT,N,XPT(N),YPT(N),ZPT(N),KN

```

```

9006 FORMAT(1I14,1I4,3F10.0,15)
C ***CHECK FOR CYLINDRICAL COORDINATES
C
IF (CT .NE. CTEST) GO TO 20
R=XP1(N)
XPT(N)=R*SIN(ZPT(N)/57.2958)
ZPT(N)=R*COS(ZPT(N)/57.2958)
20 CONTINUE
NUMPT(N)=N
IF (NOLD.EQ.0) GO TO 50
C*****CHECK IF GENERATION IS REQUIRED
C
IF (KN.EQ.0) GO TO 50
NUM=(N-NOLD)/KN
NUMN=NUM-1
IF (NUMN.LT.1) GO TO 50
XNUM=NUM
DX=(XPT(N)-XPT(NOLD))/XNUM
DY=(YPT(N)-YPT(NOLD))/XNUM
DZ=(ZPT(N)-ZPT(NOLD))/XNUM
K=NOLD
DO 30 J=1,NUMN
KK=K
K=K+KN
XPT(K)=XPT(KK)+DX
YPT(K)=YPT(KK)+DY
ZPT(K)=ZPT(KK)+DZ
NUMPT(K)=K
30 CONTINUE
50 NOLD=N
IF (N .NE. NUMNP) GO TO 10
NUMEL=0
C*****READ ELEMENT CONTROL CARDS
DO 900 M=1,NELTYP
READ(5,1001,END=999) (INPAR(I),I=1,14)
1001 FORMAT(1I15)
1001 WRITE(6,9010) (INPAR(I),I=1,14)
9010 FORMAT(1I15,1I15)
NPAR=INPAR(1)
MTYPE=NPAR(1)
CALL ELTYPE(MTYPE,KGEOM)
900 CONTINUE
900 ENDFILE 10
999 RETURN
END
SUBROUTINE TRUSS
C

```

```

C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** READS SAP IV TRUSS ELEMENT CARDS (ELTYPE 1)
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C
C COMMON/GCONT/NUMNP,NFAR(20),NELTYP,NUMEL
N2=2
NUME=NPAR(2)
NUMMAT=NPAR(3)
C *** READ MATERIAL PROPERTY CARDS (DUMMY)
DO 10 I=1,NUMMAT
READ(5,LOC1) DUMMY
1001 FORMAT(10A8)
10 CONTINUE
C *** READ ELEMENT LOAD MUL. (DUMMY1)
DO 20 I=1,4
READ(5,LOC1) DUMMY1
20 CONTINUE
IF(NPAR(14).EQ.0) NPAR(14) = 1
N=NPAR(14)
C *** READ ELEMENT CONNECTION INFORMATION OR GENERATE
1000 READ(5,LOC4) M,I,J,M,TYPE,TEM,KK
1004 FORMAT(4I5,F10.0,15)
IF(KK.EQ.0) KK=1
120 IF(M.NE.N) GO TO 200
I=I
J=JJ
KK=KK
200 CONTINUE
NUMEL=NUMEL+1
WRITE(10) N2,NUME,I,J
IF(N.EQ.NUME) RETURN
N=N+1
I=I+KKK
J=J+KKK
IF(N.GT.120) GO TO 100
GO TO 120
END
SUBROUTINE PLANE
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** READS SAP IV MEMBRANE ELEMENT CARDS (ELTYPE 3)
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *

```

```

C      DIMENSION GCONT(4),GCONTR(4),IF(5),IX(20),NEL(4) YP,NUMEL
N4=4
      NUMEL=NPAR(3)
      NUMMAT=NPAR(3)
      *** READ MATERIAL PROPERTIES
      DO 60 M=1,NUMMAT
      READ(5,1010) MAT,NT
      FORMAT(215)
      IF(NT.EQ.0) NT=1
      NTC=2*N
      DO 50 K=1,NTC
      READ(5,1005) DUMMY
      FORMAT(10AE)
      1005 CONTINUE
      60 CONTINUE
      *** READ ELEMENT LOAD FACTORS
      C      READ(5,1002) (EMUL(I,J),J=1,5),I=1,4)
      1002 FORMAT(5F10.0)
      *** READ ELEMENT PROPERTIES
      C      IF(NPAR(14).EQ.0) NPAR(14)=1
      N=NPAR(14)-1
      1003 READ(5,1003) M,(IE(I),I=1,4),KG
      FORMAT(515) 30X,I5
      IF(KG.EQ.0) KG=1
      140 N=N+1
      IF(M.EQ.N) GO TO 145
      DO 142 I=1,4
      IX(I)=IX(I)+KG
      GO TO 150
      142 IX(I)=1E(I)^4
      145 DO 148 I=1,4
      148 CONTINUE
      150 IX(I)=IX(I)
      J = IX(2)
      K = IX(3)
      L = IX(4)
      NUMEL=NUMEL+1
      WRITE(10,N4,N,IE,J,K,L)
      IF(N.EQ.M) RETURN
      GO TO 140
      310 IF(N.EQ.M) GO TO 130
      END

```

```

SUBROUTINE BEAM
C *   *   *   *   *
C *** READS SAP IV BEAM ELEMENT CARDS (ELTYPE 2)
C *** CALLED BY ELTYPE
C *   *   *   *   *
C COMMON/GCONT/NUMNP,NPAR(20),NELTYP,NUMEL
N2=2
NUME=NPAR(2)
NUMEP=NUMEPC=NPAR(3)
NUMEFF=NPAR(4) * 2
NUMMAT=NPAR(5)
C *** READ MATERIAL PROPERTY CARDS (DUMMY)
DO 10 I=1,NUMMAT
READ(5,1001) DUMMY
1001 FORMAT(10A8)
11C CONTINUE
C *** READ ELEMENT PROPERTY CARDS (DUMMY1)
DO 20 J=1,NUMEP
READ(5,1001) DUMMY1
20 CONTINUE
C *** READ ELEMENT LOAD MULTIPLIERS (DUMMY2)
DO 30 K=1,3
READ(5,1001) DUMMY2
30 CONTINUE
C *** READ FIXED-END FORCE CARDS (DUMMY3)
DO 40 L=1,NUMEF
READ(5,1001) DUMMY3
40 CONTINUE
IF(NPAR(14).EQ.0) NPAR(14) = 1
N=NPAR(14)
C *** READ ELEMENT CONNECTION INFO
READ(5,1002) M,I,J,KK
1002 FORMAT(3I5,47X,I8)
IF(KK.EQ.0) KK=1
120 IF(M.NE.N) GO TO 200
     I = I
     J = J
     KKK = KK
CONTINUE
NUMEL = NUMEL+1
WRITE(10) N2,N,I,J
IF(N.EQ.1) RETURN
N = N + 1
I = I + KKK

```

```

J = J + KKK
IF (N.GT.M) GO TO 100
GO TO 120
END
SUBROUTINE THREEED
C *   *   *   *   *
C *** THIS SUBROUTINE READS SAP IV 3-D 8 NODE BRICK ELEMENTS
C *   *   *   *   *
C *   *   *   *   *
C DIMENSION INP(8),NP(8)
COMMON/GCONST/NUMNP,NPAR(20),NLTYP,NUMEL
N8=8
NUME=NPAR(2)
NUMMAT=NPAR(3)
NDISLD=NPAR(4)
READ THE MATERIAL PROPERTIES
DO 50 M=1,NUMMAT
      READ(5,9002) DUMMY
      9002 FORMAT(10A4)
      50 CONTINUE
C *** READ DISTRIBUTED SURFACE LOADS
      IF (NDISLD.EQ.0) GO TO 61
      DO 60 M=1,NDISLD
          READ(5,9002) DUMMY
          60 CONTINUE
C CONTINUE
      61 CONTINUE
C *** READ ACCELERATION DUE TO GRAVITY
      READ(5,9002) DUMMY
C *** READ ELEMENT LOAD CASE MULTIPLIERS
      DO 80 I=1,5
          READ(5,9002) DUMMY
          80 CONTINUE
      IF (NPAR(14).EQ.0) NPAR(14)=1
      NEL=NPAR(14)-1
      READ(5,9006) INEL,(INP(I),I=1,8),ININT,IMAT,IINC
      130 FORMAT(12I5)
      IF (IINC.EQ.0) IINC=1
      140 NEL=NEL+1
      ML=INEL-NEL
      IF (ML>150) 155,160
      150 CALL ERROR(5)
C *** NO GENERATION OF NODE POINTS REQUIRED
      155 DO 156 I=1,8
          NP(I)=INP(I)
          156

```

```

156  GO TO 162
C *** GENERATION REQUIRED
160  DO 161 I=1,8
161  CONTINUE
162  CONTINUE
NUMEL=NUMEL+1
WRITE(10) NE,NEL,(NP(I),I=1,8)
IF(NEL.EQ.NUMEL) RETURN
IF(NEL.EQ.INEL) GOTO 130
GO TO 140
END
SUBROUTINE SHELL
C * * * * *
C *** READS SAP IV SHELL ELEMENT CARDS (ELTYPE 6)
C *** CALLED BY ELTYPE
C * * * * *
C
C DIMENSION IX(7),IX(4)
COMMON/GCONT/NUMNP,NPAR(20),NELTYP,NUMEL
N4=4
ISTOP=0
NUME=NPAR(2)
NUMMAT=NPAR(3)
NMAT=2*NUMMAT
C *** READ MATERIAL PROPERTIES (DUMMY)
DO 10 N=1,NMAT
READ(5,1000) DUMMY
C
1000 FORMAT(10A8)
10 CONTINUE
C *** READ ELEMENT LOAD FACTORS (DUMMY1)
DO 20 K=1,5
READ(5,1000) DUMMY1
20 CONTINUE
IF(NPAR(14).EQ.0) NPAR(14)=1
NN=NPAR(14)-1
100 READ(5,1001) MM,IY
1001 FORMAT(8I5)
110 NN=NN+1
110 IF(MM.EQ.IY) 440,50,6C
50  DO 45 I=1,7
45  IX(I)=IY(I)
INCL=IX(7)

```

```

IF (INCL.EQ.0) INCL=1
GO TO 70
DO 65 I=1,i4 + INCL
65 IX(I)=IX(I) + INCL
CONTINUE
70 IX(1)=1
IX(2)=1
IX(3)=1
IX(4)=1
NUMEL = NUMEL +1
WRITE(10,N4,NN,I,J,K,L)
GO TO 500
500 WRITE(6,2005) MM
FORMAT(19HOCARD FOR ELEMNT(,15,14H) IS IN ERROR.,1X)
ISTOP = 1
IF(NN.LT.MM) GO TO 110
IF(NN.EQ.NLME) RETURN
IF(ISTOP.EQ.1) STOP
GO TO 100
END
SUBROUTINE BNDRY
C * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** READS SAP IV BOUNDARY ELEMENT CARDS (ELTYPE 7)
C *** BOUNDARY ELEMENTS ARE NOT PLOTTED
C *** CALLED BY ELTYPE
C * * * * * * * * * * * * * * * * * * * * * * * * * * *
C COMMON/GCONT/NUMNP,NPAR(20),NELTYP,NUMEL
C NAME=NPAR(2)
C *** READ LOAD CASE CARD (DUMMY)
C READ(5,1002) DUMMY
C 1002 FORMAT(10A8)
C *** READ BOUNDARY ELEMENT CARDS
N=0
100 READ(5,1004) M,II,KK
N=N+1
IF(N.GE.NUME) RETURN
IF(KK.GT.0) GO TO 200
GO TO 100
200 READ(5,1004) M2,II2,KK2
N=N+(M2-M)/KK
IF(N.GE.NUME) RETURN
GO TO 100
FORMAT(215,25X,15)
1004
END

```

```

SUBROUTINE SOL21
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** THIS SUBROUTINE READS SAP IV 3-D, 8-20 NODE BRICK ELEMENTS
C *** CALLED BY ELTYPE
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C
C      DIMENSION NP(20),INP(20)
C      COMMON/GCONT/NUMNP,NPAR(20),NELTYP,NUMEL
C
C      N20=20
C      NSOL21=NPAR(2)
C      NUMMAT=NPAR(3)
C      MAXXTP=NPAR(4)
C      IF(MAXXTP.EQ.0) MAXXTP=1
C      NORTH0=NPAR(5)
C      NDLS=NPAR(6)
C      MAXNOD=NPAR(7)
C      IF(MAXNOD.EQ.0) MAXNOD=21
C      IF(MAXNOD.EQ.8) N20=8
C      NOPSET=NPAR(8)
C      READ THE MATERIAL PROPERTY CARDS
C      DO 50 J=1,NUMMAT
C          READ(5,9002) M,NTF
C          FORMAT(2I5)
C          IF(NTP.EQ.0) NTP=1
C          NTP2=2*NTP
C          DO 40 JJ=1,NTP2
C              READ(5,9004) DUMMY
C              9004 FORMAT(20A4)
C              40 CONTINUE
C              50 CONTINUE
C      *** READ MATERIAL AXES ORIENTATION SETS
C      IF(NORTH0.EQ.0) GO TO 61
C      DO 60 J=1,NORTH0
C          READ(5,9004) DUMMY
C          60 CONTINUE
C      *** READ DISTRIBUTED SURFACE LOAD DATA
C      IF(NDLS.EQ.0) GO TO 71
C      NDLS2=NDLS*2
C      DO 70 J=1,NDLS2
C          READ(5,9004) DUMMY
C          70 CONTINUE
C      71 CONTINUE
C      *** READ STRESS OUTPUT LOCATION SETS
C      IF(NOPSET.EQ.0) GO TO 81

```

```

DO 80 J=1,NOPSET DUMMY
80 READ(5,9004) DUMMY
CONTINUE
81 READ(5,9004) DUMMY
DO 90 J=1,5
CONTINUE LOAD CASE MULTIPLIERS
C *** READ ELEMENT DATA CARDS
SC READ ELEMENT DATA CARDS
IF(NPAR(14).EQ.0) NPAR(14)=1
NEL=NPAR(14)-1
130 READ(5,9006) INEL,IINC
9006 FORMAT(15.35X,15)
READ(5,9008) (INP(I),I=1,N20)
9008 FORMAT(16.15)
IF(IINC.EQ.0) IINC=1
140 NEL=NEL+1
NEL=INEL-NEL
IF(ML)150,155,160
150 CALL ERROR(6)
C *** NO GENERATION OF NODE POINTS REQUIRED
C 155 DO 156 I=1,N20
NP(I)=INP(I)
156 CONTINUE
GO TO 162
C *** GENERATION OF NODE POINTS REQUIRED
C 160 DO 161 I=1,N20
IF((NP(I).EQ.0).OR.(NP(I)=KN))
NP(I)=NP(I)+KN
161 CONTINUE
NUMEL=NUMEL+1
WRITE(10,N20,'NEL',(NP(I)),I=1,N20)
IF(NEL.EQ.NSDL21) RETURN
IF(NEL.LT.INEL) GO TO 140
KN=1,IINC
GO TO 130
END
SUBROUTINE GEOM1 (NUMPT,XPT,YPT,ZPT,UPT,VPT,WPT)
C * * * * * * * * * * * * * * * * * * * * * * * *
C *** THIS ROUTINE READS ADINA DATA CARDS FROM THE TITLE CARD TO THE
C *** ELEMENT CONTROL CARDS - IT IS CALLED BY PSAPI
C * * * * * * * * * * * * * * * * * * * * * * * *
C COMMON/CONTRL/ KGEOM,KDATA,KPLOT,KSYMXY,KSYMXZ,KSYMZ,NOTAT,XLHT,
000090100

```

```

1KHORZ-KVERT, PHI, THETA, PSI, NEWFR, ISCALE, PLOTSZ, XORGN, YORGN,
2PSCALE,KOUNT,DMAG,KCDE,NCDEST,NUDISP,NWDISP,NWCISP
COMMON/GCONT/NUMNP,NPAR(20),NELTYP,NUMEL
DIMENSION NUMPT(1),XPT(1),YPT(1),ZPT(1),UPT(1),WPT(1)
DIMENSION IDOF(6),ID(6),IDOLD(6)
1NUDE(20)
DATA CTEST//X    /
NCARD=0
READ(5,9000) DUMMY
9000 FORMAT(10A4)
C *** READ MASTER CONTROL CARDS
C *** NUMNP = TOTAL NUMBER OF NODE POINTS
C *** NELTYP = NUMBER OF ELEMENT GROUPS
READ(5,9001) NUMNP,(IDOF(I),I=1,6),NEGL,NEGNL,MODEX,NSTE
9001 NELTYP=NEGL+NEGNL
NNODE=NUMNP
READ(5,9002) IMASS,IDAAMP,IMASSN,IDAAMPN
9002 FORMAT(4I5)
READ(5,9002) IEIG
READ(5,9002) ISREF,NLMREF,IEQUIT,ITEMAX
READ(5,9000) DUMMY
READ(5,9000) DUMMY
READ(5,9000) DUMMY
READ(5,9000) DUMMY
C *** READ FOR GENERATE NODAL POINT DATA
NOLD=0
NEQ=0
10 READ(5,9006)CT,N,(ID(I),I=1,6),XPT(N),YPT(N),ZPT(N),KN
9006 FORMAT(1A1,4,1X,14,15,10,0,15)
C *** CHECK FOR CYLINDRICAL COORDINATES
15 IF(CT.NE.'CTEST') GO TO 12
DUM=ZPT(N)/57.2958
R=YPT(N)
YPT(N)=R*COS(ZPT(N)/57.2958)
ZPT(N)=R*SIN(ZPT(N)/57.2958)
12 CONTINUE
NUMPT(N)=N
IF(NOLD.EQ.0) GO TO 50
C *** FOR GENERATION OF FIXED BOUNDARY CONDITIONS
DO 15 I=1,6
IF(IDOLD(I).EQ.-1.AND.ID(I).EQ.0) ID(I)=IDOLD(I)
15 CONTINUE
IF(KNOLD.EQ.0) GO TO 50
NUM=(N-NOLD)/KNOLD
NUM=(NUM-1)
IF(NUM.LT.1) GO TO 50
C *** TO COUNT DOFS TO DETERMINE NUMBER OF IC CARCS

```

```

DO 20 I=1,6 IF(IDOF(I).EQ.0 .AND. IDOLD(I).EQ.0) NEQ=NEQ+NUMN
20 CONTINUE
DX=(XPT(N)-XPT(NOLD))/NUM
IF(CT*NE*CTEST) GO TO 21
ROLD=YPT(NOLD)/COS(DUMOLD)
RNEW=YPT(N)/COS(DUM)
DR=(RNEW-ROLD)/NUM
DT=(DUM-DUMOLD)/NUM
GO TO 22
21 CONTINUE
DY=(YPT(N)-YPT(NOLD))/NUM
DZ=(ZPT(N)-ZPT(NOLD))/NUM
22 CONTINUE
K=NOLD
DO 30 J=1,NUMN
K=K+KNOLD
K=K+K*KNOLD
XPT(K)=XPT(KK)+DX
IF(CT*NE*CTEST) GO TO 26
ROLD=ROLD+DR
DUMOLD=DUMOLD+DT
YPT(K)=ROLD*COS(DUMOLD)
ZPT(K)=ROLD*SIN(DUMOLD)
GO TO 28
26 CONTINUE
YPT(K)=YPT(KK)+DY
ZPT(K)=ZPT(KK)+DZ
CONTINUE
30 NOLD=N
KNOLD=KN
DUMOLD=DUM
DO 50 COUNT=0,1000
50 COUNT=0
55 IF(N*NE*NUKAP) GO TO 10
DO 55 I=1,6
IF(IDOF(I).EQ.0 .AND. ID(I).EQ.0) NEQ=NEQ+1
IDOLD(I)=ID(I)
55 CONTINUE
C *** TO COUNT DOFS TO DETERMINE NUMBER OF IC CARDS
DO 55 I=1,6
IF(IDOF(I).EQ.0 .AND. ID(I).EQ.0) NEQ=NEQ+1
IDOLD(I)=ID(I)
55 CONTINUE
C *** READ LJAD CONTROL CARDS
READ(5,9000) DUMMY
DO 80 I=1,IMASSN
IF(IMASSN.EQ.0) GO TO 81
IF(READ(5,9000) DUMMY
80 CONTINUE
81 IF(ICAMPN.EQ.0) GO TO 91

```

```

DO 90 I=1, IDAMPN
90  READ(15,900) DUMMY
91  CONTINUE
C *** READ INITIAL CONDITIONS
92  READ(15,902) ICON
IF(ICON.EQ.0) GO TO 100
ICARDNR = NEQ/6.0
NCARD = INT(ICARDNR)
NCARD = ICARD - NCARD
TEST = ICARD - GT * 0.1
NCARD = NCARD + 1
DO 95 I=1, NCARD
READ(15,9000) DUMMY
95  IF(TEST.EQ.0) GO TO 100
DO 96 I=1, NCARD
READ(15,9000) DUMMY
96  CONTINUE
DO 98 I=1, NCARD
READ(15,9000) DUMMY
98  CONTINUE
9007 FORMAT(6E12.6)
100 CONTINUE
NUMEL = 0
WRITE(16,9009) NEQ, NCARD
9009 FORMAT(1//0, NEQ AND NCARD FOR IC IN GEOM1 = *, 15, 10X, 15//)
C *** READ ELEMENT CONTROL CARDS
DO 900 M=1, NELTYP
READ(15,9008) END = 999(NPAR(I), I=1, 20)
9008 WRITE(16,9010) (NPAR(I), I=1, 20)
9010 FORMAT(1//0, NPAR = *, 20 15//)
MTYPE = NPAR(1)
CALL ELTYPE(MTYPE, KGEOM1)
900 CONTINUE
900 ENDFILE 10
999 RETURN
END
SUBROUTINE ADTRUS
C * * * * *
C *** THIS SUBROUTINE TO READ ADINA TRUSS DATA
C *** THIS ROUTINE CALLED BY ELTYPE
C * * * * *
C COMMON/GCONT/NUMNP, NPAR(20), NELTYP, NUMEL
000000080
000000090
000000100
000000110
000000120
000000130
000000140
000000150
000000160
000000170
000000180
000000190
000000200
000000210
000000220
000000230
000000240
000000250
000000260
000000270
000000280
000000290
000000300
000000310
000000320
000000330
000000340
000000350
000000360
000000370
000000380
000000390
000000400
000000410
000000420
000000430
000000440
000000450
000000460
000000470
000000480
000000490
000000500
000000510
000000520
000000530
000000540
000000550

```

```

NUMMAT=NPAR(16)
N2=2
IF(NUMMAT.EQ.0) NUMMAT=1
IF(NPAR(15).EQ.1) NCARD=1
IF(NPAR(15).EQ.2) NCARD=2
IF(NPAR(15).EQ.3) NCARD=3
IF(NPAR(17).EQ.2) GO TO 20
CARDNR=NPAR(17)/8.0
NCARD=INT(CARDNR)
TEST=CARDNR-NCARD
IF(TEST.GT.0.1) NCARD=NCARD+1
NCARD=NCARD+2
CONTINUE
20 READ MATERIAL PROPERTIES
DO 50 J=1,NUMMAT
DO 45 I=1,NCARD
READ(5,9000) DUMMY
9000 FORMAT(20A4)
45 CONTINUE
50 CONTINUE
C *** READ OR GENERATE ELEMENT DATA CARDS
IF(NPAR(14).EQ.0) NPAR(14)=1
NEL=NPAR(14)-1
READ(5,9002) INEL,II,JJ,INC
130 READ(5,9002) INEL,II,JJ,INC
9002 FORMAT(3I5,20X,I5)
IF(IINC.EQ.0) IINC=1
140 NEL=NEL+1
ML=INEL-NEL
IF(ML)150,155,160
150 CALL ERROR(7)
C *** NO GENERATION OF NODE POINTS REQUIRED
155 I=1
J=J+KN
GO TO 162
C *** GENERATION OF NODE POINTS REQUIRED
160 I=I+KN
162 CONTINUE
NUMEL=NUMEL+1
WRITE(10) N2,INEL,I,J
IF(INEL.EQ.NPAR(2)) RETURN
IF(INEL.LT.INEL) GO TO 140
KN=IINC
GO TO 130
END
SUBROUTINE ADPLAN
COMMON/GCOUNT/NUMNP,NPAR(20),NLTYP,NUMEL
DIMENSION NP(12),NP(8)
C

```

```

C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C *** THIS SUBROUTINE TO READ ADINA 8-NODE PLANE ELEMENT DATA
C *** IT IS CALLED BY ELTYFE
C
C
C *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *   *
C
C NUMMAT=NPAR(16)
C NSTRES=NPART(13)
C CALCULATE THE NUMBER OF MATERIAL CASE CARDS
C
C *** IF(NPAR(15)=EQ. 1) NCARD=1
C IF(NPAR(15)=EQ. 2) NCARD=1
C IF(NPAR(15)=EQ. 3) NCARD=4
C IF(NPAR(15)=EQ. 4) NCARD=4
C IF(NPAR(15)=EQ. 5) NCARD=2
C IF(NPAR(15)=EQ. 7) NCARD=1
C IF(NPAR(15)=EQ. 8) NCARD=1
C IF(NPAR(15)=EQ. 9) NCARD=1
C IF(NPAR(15)=EQ. 10) NCARD=6
C IF(NPAR(15)=EQ. 11) NCARD=6
C IF(NPAR(15)=EQ. 13) NCARD=1
C IF(NPAR(15)=NE. 14) NCARD=1
C CARDNR=NPAR(17)/8.0
C CARD=INT(CARDNR)
C NCARD=CARD-NCARD
C IF(TEST.GT.0.1) NCARD=NCARD+1
C CONTINUE
20 N12=12
C *** READ MATERIAL PROPERTIES
DO 50 J=1,NUMMAT
  READ(5,9000) DUMMY
9000 FORMAT(20A4)
  DO 45 I=1,NCARD
    READ(5,9000) DUMMY
    45 CONTINUE
50  CONTINUE
C *** READ STRESS OUTPUT TABLE CARDS
IF(NPAR(13)=EQ.0) GO TO 61
  DO 60 I=1,NSTRES
    READ(5,9000) DUMMY
60  CONTINUE
C *** READ AND GENERATE ELEMENT DATA CARDS
IF(NPAR(14)=EQ.0) NFAR(14)=1
  NEL=NPAR(14)-1
  130 READ(5,9002) INFL,IINC
    IF(IINC.EQ.0) IINC=1

```

```

9002 FORMAT(15,15X,15)
9004 READ(5,504)(INP(I),I=1,8)
14C NEL=NEL+1
    IF(NEL>150)155,160
150 CALL ERROR(8)
C *** NO GENERATION OF NODE POINTS REQUIRED
C 155 DO 156 I=1,4
    156 I=I+4
    157 I=I+8
    158 NP(1)=INP(1)
    159 NP(15)=0
    160 NP(19)=INP(15)
156 GO TO 162
C *** GENERATION OF NODE POINTS REQUIRED
160 DO 161 I=1,N12
    161 IF(INP(I).EQ.0) GO TO 161
        NP(I)=NP(I)+KN
    162 CONTINUE
    NUMEL=NUMEL+1
    WRITE(10)N12,NEL,(NP(I),I=1,N12)
    IF(NEL.EQ.NPAR(2)) RETURN
    IF(NEL.LT.INEL) GO TO 140
    KN=1
    INC
    GO TO 130
END
SUBROUTINE AD3DEE
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C *** THIS SUBROUTINE TO READ ADINA 3-D SOLID ELEMENT DATA
C *** THIS ROUTINE CALLED BY ELTYPE
C * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
C COMMON/GCONT/NUMNP,NFAR(20),NELTYP,NUMEL
C DIMENSION NP(20),INP(20)
C NUMMAT=NPAR(16)
C NSTRES=NPAR(13)
C CALCULATE THE NUMBER OF MATERIAL CASE CARDS
C *** IF(NPAR(15).EQ.1) NCARD=1
C *** IF(NPAR(15).EQ.2) NCARD=2+NPAR(18)
C *** IF(NPAR(15).EQ.3) NCARD=4
C *** IF(NPAR(15).EQ.4) NCARD=4
C *** IF(NPAR(15).EQ.5) NCARD=2

```

```

IF(NPAR(15).EQ. 8) NCARD=1
IF(NPAR(15).EQ. 9) NCARD=1
IF(NPAR(15).EQ.10) NCARD=6
IF(NPAR(15).EQ.11) NCARD=6
IF(NPAR(15).NE.12) GC TO 20
CARDR=NPAR(17)/8.0
NCARD=INT(CARDNR)
TEST=CARDNR-NCARD
TEST=TEST.GT.0.1 NCARD=NCARD+1
20 CONTINUE
N20=20
C *** READ MATERIAL PROPERTIES
DO 50 J=1,NUMMAT
  READ(5,9000) DUMMY
9000 FORMAT(20A4)
DO 45 I=1,NCARD
  READ(5,9000) DUMMY
  CONTINUE
45 CONTINUE
C *** READ STRESS OUTPUT TABLE CARDS
IF(NPAR(13).EQ.0) GC TC 61
DO 60 I=1,NSTRES
  READ(5,9000) DUMMY
60 CONTINUE
IF(NPAR(14).EQ.0) NPAR(14)=1
NEL=NPAR(14)-1
READ(5,9002) INEL,IINC
FORMAT(15,30X,I5)
IF(IINC.EQ.0) IINC=1
READ(5,9004) (INP(I),I=1,8)
READ(5,9004) (INP(I),I=9,N20)
FORMAT(12I5)
140 NEL=NEL-NEL
ML=INEL-NEL
IF(ML)150,155,160
150 CALL ERROR(9)
C *** NO GENERATION OF NODE POINTS REQUIRED
155 DO 156 I=1,N20
  NP(I)=INP(I)
156 CONTINUE
156 GO TO 162
C *** GENERATION OF NODE POINTS REQUIRED
160 DO 161 I=1,N20
  IF(NP(I).EQ.0) GC TO 161
  NP(I)=NP(I)+KN
161 CONTINUE
162 CONTINUE

```

```

NUMEL=NUMEL+1
WRITE(10) N20, NELL, (NP(I), I=1, N20)
IF(NEL.EQ.NPAR(2)) RETURN
KN=1 INC
GO TO 130
END
SUBROUTINE ADBEAM
C * * * * * * * * * * * * * * * * * * * * * * * *
C *** THIS SUBROUTINE TO READ ADINA 2NODE BEAM ELEMENTS
C *** THIS ROUTINE CALLED BY ELTYPE
C * * * * * * * * * * * * * * * * * * * * * * * *
COMMON/GCQNT/NUMNP,NPAR(20),NLTYP,NUMEL
N2=2
NUMMAT=NPAR(16)
IF(NUMMAT.EQ.0) NUMMAT=1
READ(MATERIAL,PROPERTIES)
DO 50 J=1,NUMMAT
  DO 45 I=1,2
    READ(15,9000) DUMMY
  9000 FORMAT(20A4)
  45 CONTINUE
  50 CONTINUE
C *** READ STRESS OUTPUT TABLE CARDS
  IF(NPAR(13).EQ.0) GO TO 81
  NST=NPAR(13)
  CARDST=NPAR(14)/16.0
  NCDEST=INT(CARDST)
  TEST=CARLST-NCDEST
  IF(TEST.GT.0.01) NCDEST=NCDEST+1
  NST=NST*NCDEST
  DO 80 I=1,NST
    READ(15,9000) DUMMY
  80 CONTINUE
C *** READ OR GENERATE ELEMENT DATA CARDS
  IF(NPAR(17).EQ.0) NPAR(17)=1
  NEL=NPAR(17)-1
  READ(15,9002) INEL,II,JJ,INC
  130 FORMAT(5I15*15X,I5)
  9002 IF(I INC.EQ.0) II NC=1
  140 NEL=NEL-NEL
  ML=INEL-NEL

```

```

      IF(ML) 150,155,160
      CALL ERROR(10)
      NO GENERATION OF NODE POINTS REQUIRED
      155
      C ** NO GENERATION OF NODE POINTS REQUIRED
      155
      J=J+1
      GO TO 162
      C ** GENERATION OF NODE PCINTS REQUIRED
      160
      I=I+KN
      J=J+KN
      162
      CONTINUE
      NNUMEL=NNUMEL+1
      WRITE(10) N2,NEL,I,J
      IF(NEL.EQ.NPAR(2)) RETURN
      IF(NEL.LT.INEL) GO TO 140
      KN=INC
      GO TO 130
      END
      SUBROUTINE GEOM2 (NUMFT,XPT,YPT,ZPT,UPT,VPT,WPT)
      CALL ERROR(14)
      RETURN
      END
      SUBROUTINE NSRUS
      *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *** THIS SUBROUTINE TO READ NON SAP TRUSS ELEMENTS
      *** CALLED BY ELTYPE
      *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      RETURN
      END
      SUBROUTINE NSPLAN
      *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *** THIS SUBROUTINE TO READ NON SAP 2 D 8 NODE PLANE ELEMENTS
      *** CALLED BY ELTYPE
      *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      RETURN
      END
      SUBROUTINE NS3DEE
      *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *** THIS SUBROUTINE TO READ NON SAP 3-D ELEMENT DATA
      *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *
      *   *   *   *   *   *   *   *   *   *   *   *

```

```

C *** CALLED BY ELTYPE
C * * * * * * * * * * * * * * * * * * * * * *
C RETURN
END
SUBROUTINE DATA1( NUMPT, XPT, YPT, ZPT, UPT, VPT, WPT)
C *** CALLED BY PSAPI
C RETURN
END
SUBROUTINE DATA5( NUMPT, XPT, YPT, ZPT, UPT, VPT, WPT)
C *** CALLED BY PSAPI
C RETURN
END
SUBROUTINE DATA9( NUMPT, XPT, YPT, ZPT, UPT, VPT, WPT, DISPD, NON)
C * * * * * * * * * * * * * * * * * * * * * *
C *** USER SUPPLIED DISPLACEMENT INPUT SUBROUTINE .
C *** CALLED BY PSAPI
C * * * * * * * * * * * * * * * * * * * * * *
COMMON/CODATA/NTLC
COMMON/CONTRL/ KGEOM,KDATA,KPLOT,KSYMXY,KSYMZX,KSYMYZ,NOTAT,XLHT,
1KHGRZ,KVERT,PHITAPSI,NEWFR,ISCALE,PLOTSZ,XORGN,YORGN,
2PSCALE,KDISP,DMAK,KODE
COMMON/KOUNT/NNODE,NDEST,NUDISP,NWDISP
COMMON/NUMPT/ XPT(1),YPT(1),ZPT(1),UPT(1),VPT(1),WPT(1)
DIMENSION DISPD(5,3,NCN)
C
IF (NUDISP.EQ.0.AND.NWDISP.EQ.0) GO TO 25
IF (NTIME.EQ.0) GO TO 100
READ(5,1000) NTLC,SCALEF
1000 FORMAT(15,F10.0)
IF(SCALEF.EQ.0) SCALEF=1.0
10 READ(5,2000) NLCAS,U,V,W
2000 FORMAT(214,3E12.5)
DISPD(NLCAS,1,1)=U*SCALEF
DISPD(NLCAS,2,1)=V*SCALEF
DISPD(NLCAS,3,1)=W*SCALEF
IF( (NLCAS.EQ.NTLC).AND.(N.EQ. 1 ) ) GO TO 100
GO TO 10
100 NTIME = NTIME + 1

```

00003920  
00003930  
00003940  
00003950  
00003960  
00003970  
00003980  
00003990

200C DO 20 I=1,NODE  
UPT(I) = DISPDISPDISP  
VPT(I) = DISPDISPDISP  
WPT(I) = DISPDISPDISP  
CONTINUE  
20 CONTINUE  
25 RETURN  
END

LIST OF REFERENCES

1. Earthquake Engineering Research Center report No. 73-11, SAP IV A Structural Analysis Program for Static and Dynamic Response of Linear Systems, By K. Bathe, E. L. Wilson and F. E. Peterson, June 1973 (revised April 1974).
2. Massachusetts Institute of Technology Report No. 82448-1, A Finite Element Program for Automatic Dynamic Incremental Nonlinear Analysis (ADINA), by K. Bathe, September 1975 (revised May 1976).
3. Bathe, K. J. and Wilson, E. L., Numerical Methods in Finite Element Analysis, 1st ed., p. 125, 128-32, Prentice-Hall, 1976.
4. National Aeronautics and Space Administration TN D-7797, Digital Computer Programs for Generating Oblique Orthographic Projections and Contour Plots, by Gary L. Giles, January 1975.
5. Naval Postgraduate School Technical Note No. 0211-03, Plotting Package for NPS IBM-360/67, by Patricia C. Johnson, January 1974.
6. Losh, D. M., The Implementation of a Finite Element Computer Code and Associated Pre- and Postprocessor into AE 4101 and 4102 (Flight Vehicle Structural Analysis I and II), Master of Science Thesis, Naval Postgraduate School, Monterey, CA., December 1976.
7. Naval Postgraduate School Technical Note No. 0211-5, User Libraries and Source Code Editing Under OS, by Sharon D. Raney, January 1976.
8. W. R. Church Computer Center Naval Postgraduate School, Monterey, CA., User's Manual, 1st ed., March 1970.

INITIAL DISTRIBUTION LIST

|   | No. Copies |
|---|------------|
| 1. Defense Documentation Center<br>Cameron Station<br>Alexandria, Virginia 22314  | 2          |
| 2. Library, Code 0212<br>Naval Postgraduate School<br>Monterey, CA. 93940   | 2          |
| 3. Department Chairman, Code 69<br>Department of Mechanical Engineering<br>Naval Postgraduate School<br>Monterey, CA. 93940       | 1          |
| 4. Professor Gilles Cantin, Code 69Ci<br>Department of Mechanical Engineering<br>Naval Postgraduate School<br>Monterey, CA. 93940 | 12         |
| 5. Assoc. Professor R. E. Ball, Code 67Bp<br>Department of Aeronautics<br>Naval Postgraduate School<br>Monterey, CA. 93940        | 2          |
| 6. LT Adrian E. Kibler Jr., USN<br>Third Ave.<br>Hastings, PA. 16646  | 1          |
| 7. Georges Verchery<br>Departement de Genie Mécanique<br>Université de Technologie<br>60200 Compiègne, France                     | 2          |
| 8. Jean Louis Armand<br>Institut de Recherche Pour la<br>Construction Navale<br>3 Avenue de Grand Champ<br>78230 le Pecq, France  | 2          |
| 9. Prof. K. J. Bathe<br>Mechanical Engineering Department<br>M. I. T.<br>77 Massachusetts Avenue<br>Cambridge, Mass. 02139        | 2          |

|   | No. Copies |
|---|------------|
| 10. William J. Dodge<br>Oak Ridge National Lab.<br>Building 9204-1 Box Y<br>Oak Ridge Tenn. 36830   | 1          |
| 11. Jack Tree<br>Air Research Manufacturing Co.<br>402 South 36th Street<br>P. O. Box 5217<br>Phoenix, Arizona 85010  | 1          |
| 12. Prof. Edward L. Wilson<br>Structural Engineering Division<br>Civil Engineering Department<br>University of California (Berkeley)<br>Berkeley, CA. 94720 | 1          |
| 13. Dr. William J. Stronge (Code 603)<br>Naval Weapons Center<br>China Lake, California 93955   | 2          |
| 14. J.E. Serpanos<br>Code 3162<br>Naval Weapons Center<br>China Lake, California 93955  | 1          |