

AD-A048 730

NAVAL OCEANOGRAPHIC OFFICE WASHINGTON D C  
VARIABILITY OF OCEANOGRAPHIC CONDITIONS AT OCEAN WEATHER STATION--ETC(U)  
JUN 77 W H BEATTY

F/G 8/11


UNCLASSIFIED

NOO-TN-3700-67-77

NL

| 9 |

ADA048 730

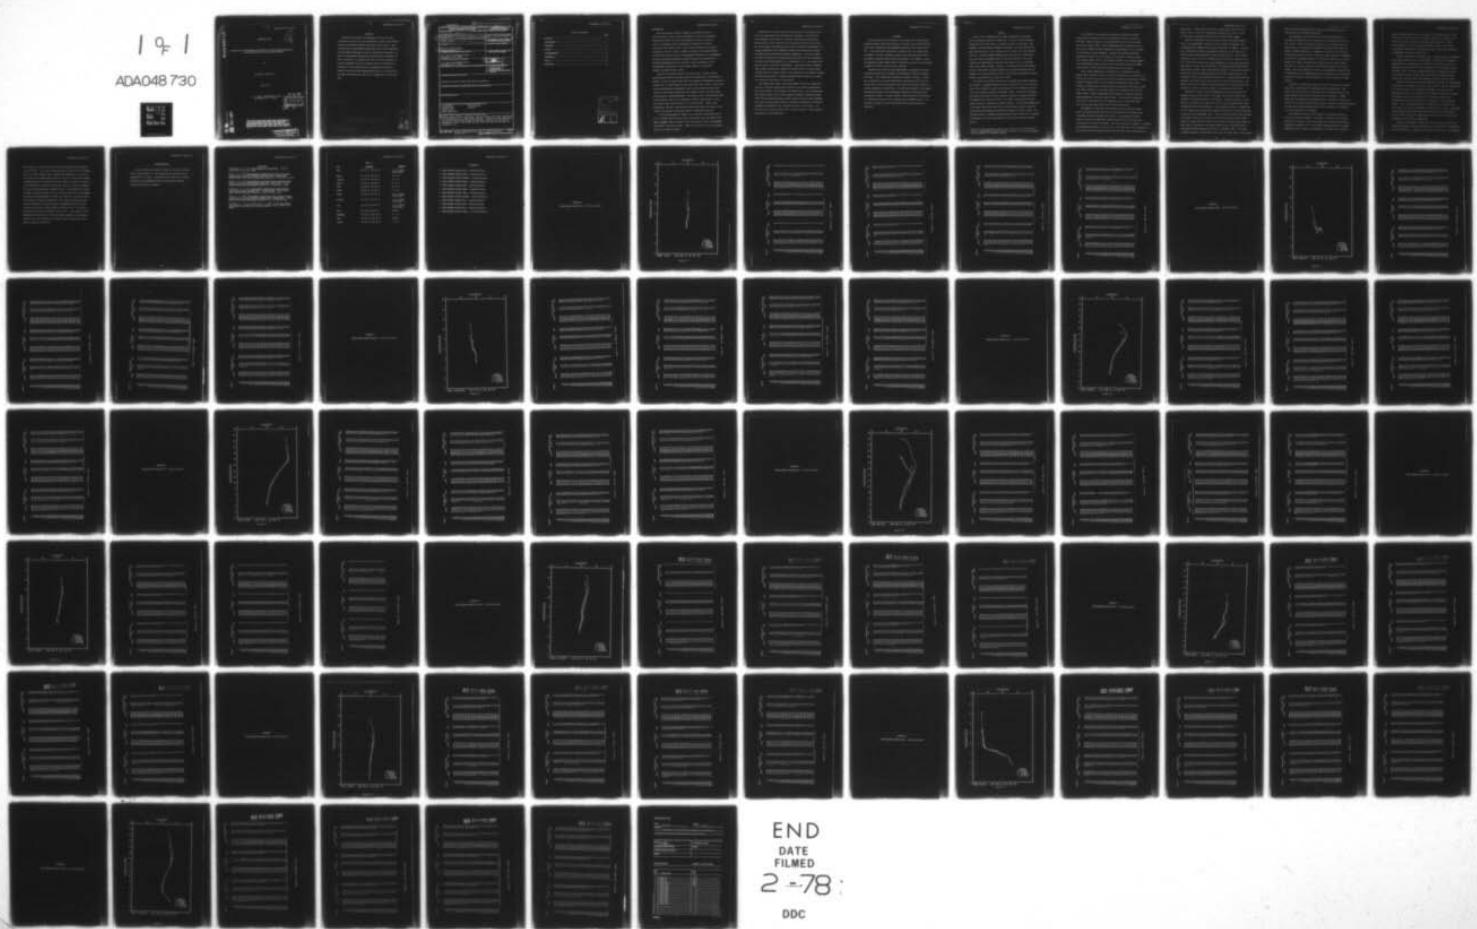


END

DATE

FILMED

2-78

DDC

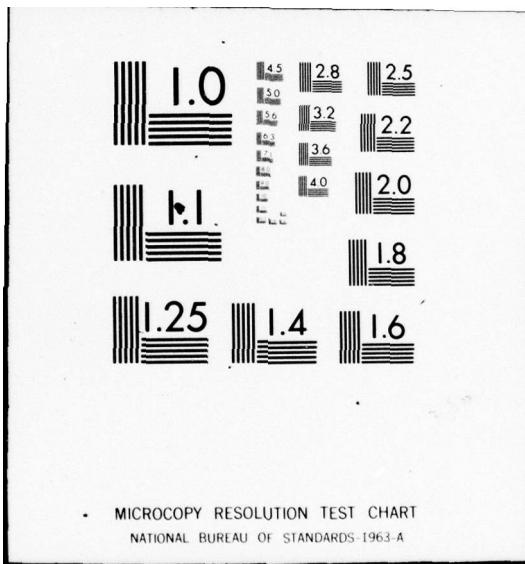

ADA048730

NAVOCEANO TN 3700-67-77

TECHNICAL NOTE

*[Handwritten signature]*


VARIABILITY OF OCEANOGRAPHIC CONDITIONS AT OCEAN WEATHER STATIONS IN  
THE NORTH ATLANTIC AND NORTH PACIFIC OCEANS

by

William H. Beatty III

June 1977

U. S. NAVAL OCEANOGRAPHIC OFFICE  
WASHINGTON, D. C. 20373

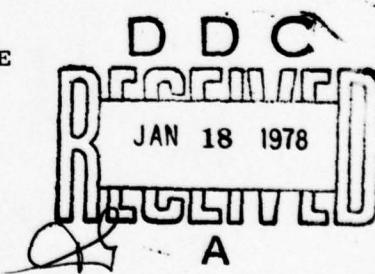

No. \_\_\_\_\_  
DDC FILE COPY


*[Handwritten signature]*  
~~This note has been prepared for use within the  
Naval Oceanographic Office. It should not be  
copied or sent outside the Office except as  
prescribed in NAVOCEANO Publications Standards.~~

DISTRIBUTION STATEMENT A  
Approved for public release  
Distribution Unlimited

## ABSTRACT

Seasonal mean salinity and temperature values and their variability from the mean were determined for twelve ocean weather stations in the North Atlantic and North Pacific Oceans. High variabilities in near-surface layers above 200 m can be explained by wind-induced mechanical mixing and upwelling and temporal variations in radiational heating and cooling from the atmosphere as well as advection. At depths below 200 m the close proximity of strong or moderate fronts and internal waves are reasonable explanations of high variabilities in temperature and salinity.

Tabular listings and mean temperature-salinity (T-S) diagrams for each OWS are presented by season in the appendices following the text.

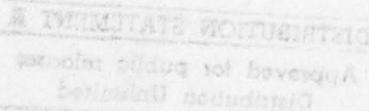

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

N08-TN-3700-67-77

(14)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Note 3700-67-77 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Variability of Oceanographic Conditions at Ocean Weather Stations in the North Atlantic and North Pacific Oceans.		5. TYPE OF REPORT & PERIOD COVERED 9 Technical note
6. AUTHOR(s) William H. Beatty, III		7. CONTRACT OR GRANT NUMBER(s)
8. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Naval Oceanographic Office Washington, D.C. 20373 ✓		9. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
10. CONTROLLING OFFICE NAME AND ADDRESS U.S. Naval Oceanographic Office Washington, D.C. 20373		11. REPORT DATE Jun 77
12. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		13. NUMBER OF PAGES 86
14. DECLASSIFICATION/DOWNGRADING SCHEDULE 12/89P UNCLASSIFIED		
15. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
16. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
17. SUPPLEMENTARY NOTES		
18. KEY WORDS (Continue on reverse side if necessary and identify by block number) Oceanography Sound Velocity Atlantic Ocean Salinity Pacific Ocean Water Temperature		
19. ABSTRACT (Continue on reverse side if necessary and identify by block number) Seasonal mean salinity, temperature, and sound velocity and their variability were determined for 12 ocean weather stations. Variability above 200m depths is caused by wind-induced mixing and upwelling, advection and radiational heating and cooling. Below 200m internal waves and ocean fronts cause the variability. ←		

## Table Of Contents

	Page
<b>ABSTRACT</b>	i
<b>INTRODUCTION</b>	1
<b>PROCEDURE</b>	3
<b>RESULTS</b>	4
<b>ACKNOWLEDGMENTS</b>	10
<b>REFERENCES</b>	11
<b>TABLE 1</b>	12
<b>APPENDICES</b>	13

ACCESSION FOR	
RMS	White Section <input checked="" type="checkbox"/>
DSC	Black Section <input type="checkbox"/>
UNARMED	
JUSTIFICATION	
BT	
DISTRIBUTION/AVAILABILITY CODES	
BEST	AVAIL. and/or SPECIAL
A	

## INTRODUCTION

The ocean weather stations occupied for extended periods of time by vessels of various nations equipped for routine oceanographic observations provide the naval environmentalist with an excellent source of information about oceanographic variability at certain locations in the world's ocean. Because the observations are usually time-series, that is, taken at regular intervals over extended periods of time, their value as aids to oceanographic forecasting is considerable. The data from these observations compiled during the construction of a Northern Hemisphere data file, provide a brief introduction to the oceanographic conditions at ocean weather stations in the North Atlantic and North Pacific Oceans.

The use of stationary ships in the open ocean to acquire routine meteorological data was initiated nearly two decades prior to World War II. However, it was not until August 1956 that Canadian oceanographers initiated Nansen casts at Ocean Weather Station (OWS) PAPA ( $50^{\circ}\text{N}$ ,  $145^{\circ}\text{W}$ ). Before then routine oceanographic measurements taken at ocean weather stations were limited to sea surface temperatures and thermal profiles taken with ship-board mechanical bathythermographs. The Nansen casts at OWS PAPA were taken to both shallow (400 m) and intermediate (2000 m) depths weekly, and, at least three times during a cruise, to near the bottom. (Husby, 1967) Temperature, salinity, and dissolved oxygen observations were made at each station with silicate observations made at intermediate stations.

In 1962 oceanography was added to the statutory responsibilities of the U. S. Coast Guard with the result that Nansen casts were begun at OWS BRAVO, CHARLIE, DELTA, and ECHO in the North Atlantic and at OWS NOVEMBER and VICTOR in the North Pacific. Names and locations of the ocean weather stations are shown in Table I.

Observations at these stations have been taken intermittently since 1964 with approximately the same methods, instruments, and procedures being employed at each station. The basic program consisted of daily Nansen casts to 1500 m plus two casts to near the bottom on each cruise. Sea water samples were analyzed at sea with an induction salinometer, and in situ temperatures and thermometric depths were determined with pairs of protected and unprotected reversing thermometers. Sea water samples from both the surface and deepest bottles from each cast were forwarded to the Coast Guard Oceanographic Unit in Washington, D. C., and analyzed for quality control of salinity measurements. Coast Guard vessels occupying ocean weather stations were required to remain within a ten-mile square centered about the station insofar as the exigencies of navigation, weather, and mission would permit. Similar procedures were followed at six additional stations maintained by other nations.

The observations taken at the Ocean Weather Stations are especially useful to long-term climatological studies of sea surface temperatures, sonic layer depths, sound channels, and surface ducts. When incorporated into acoustic models such as Fast Asymptotic Coherent Transmission Model (FACT) and Shipboard Helicopter Acoustic Range Prediction System (SHARPS), these data are particularly useful in determining variability of acoustic parameters (propagation loss, convergence zones) at given points. As such the data are particularly useful to naval planners in their planning and execution of ASW operations.

PROCEDURE

Ocean station data consisting of both Nansen casts and salinity-temperature-depth (STD) drops from each of twelve ocean weather stations (OWS) were accessed from the NAVOCEANO UNIVAC-1108 ocean station data file. Only those casts extending to a depth of 200 m or greater were considered. The data, grouped by season, were collected from within a two-degree rectangle centered about each station. For example, in the investigation of OWS VICTOR ( $34^{\circ}00'N$ ,  $164^{\circ}00'E$ ) all data in the rectangle bounded by  $33^{\circ}-35^{\circ}N$ ,  $163^{\circ}-165^{\circ}E$  were examined.

Seasonal mean salinities and temperatures at standard depths were tabulated together with the number of observations and their standard deviations. All observations occurring in January, February, or March were considered to be winter observations, and those occurring in the second, third, and fourth quarters were deemed to be spring, summer, or autumn observations, respectively. The data were treated in this manner because meteorological and oceanographic heating and cooling lag the astronomical seasons. The mean seasonal observations were also plotted on a temperature-salinity (T-S) diagram using a XYNETICS plotter. No attempts were made to adjust questionable data through deletion or smoothing.

## RESULTS

Results of the computations are shown in Appendices A through L with each appendix covering a single OWS\*. OWS INDIA, located between Iceland and the British Isles, is totally lacking in winter data. OWS NOVEMBER, situated between California and Hawaii, was excluded from the study because data from that station were not found in the ocean station data file. OWS ALFA, BRAVO, CHARLIE, KILO, and INDIA all located away from the strong and moderate fronts of the North Atlantic, show less variation of temperature and salinity from surface to bottom than OWS DELTA, ECHO, HOTEL, JULIETT, and MIKE. Low evaporation and high precipitation in these high latitudes together with strong wind mixing and the absence of a strong or moderate front cause relatively homogeneous oceanographic conditions both in space and in time.

The water at OWS ALFA, located in the Irminger Sea between Greenland and Iceland, is probably formed by mixing of fairly saline ( $35.35^{\circ}/00$ ) and warm ( $9.5^{\circ}\text{C}$ ) Northeast Atlantic Water and cold ( $4.0^{\circ}\text{C}$ ) moderately saline ( $34.9^{\circ}/00$ ) Irminger Sea Water (Fairbridge, 1966). Convective overturning and strong wind mixing in winter combine to maintain standard deviations of temperature of less than  $0.50^{\circ}\text{C}$ . The higher temperatures during the summer months are indicative of surface heating. The increased temperatures in the upper 200 m with little or no salinity change repress convective overturning thus eliminating surface ducts during the warmer months. The combined effects of autumnal overturning and winter cooling act to suppress the formation of a sonic layer depth at this station during the colder months.

\*All data in the appendices and text are in metric units with depths in meters, temperatures in degrees Celsius, salinities in parts per thousand, and sound speeds in meters per second.

At OWS BRAVO in the Labrador Sea between Greenland and Labrador temperatures in the upper 100 m are consistently colder than those at OWS ALFA. General features of the thermohaline structure at OWS BRAVO are given by Shuhy (1969). These temperatures show a pronounced annual march with a maximum surface temperature of approximately 9.5°C occurring in late August or early September. Although the maximum temperature gradient was found to be in the upper 100 m, effects of summer warming were found as deep as 450 m. The combined effects of sea surface temperature maximum and surface salinity minimum (34.28°/00) during the summer months tend to inhibit convective overturning at this station.

Shuhy (1969) suggests that the presence of a permanent halocline between 200 m and 400 m acts as a barrier to convective overturning for the better part of the year in spite of winter cooling and wind mixing. However, studies of oxygen content of the bottom and deep waters found in this vicinity are indicative of strong convective overturning (Fairbridge, 1966). High static stability in the upper layers at this station leads to high warmer oceanic surface temperatures and destruction of surface ducts for sound propagation in the warm summer months. The increase of temperature with depth at this station can be explained by cold, relatively fresh arctic water overriding warmer, more saline oceanic water.

OWS CHARLIE, located near the southern end of the Reykjanes Ridge, shows a pronounced annual march of sea surface temperature together with a permanent halocline between 200 and 400 m. The permanent halocline tends to inhibit the temperature variability below 200 m and convective overturning at and below this depth. The high salinities (34.92°/00 - 34.98°/00) and temperatures between 3.0° and 3.8°C at and below 1000 m are characteristic of the North Atlantic Deep Water found over the entire North American Basin

Husby (1968). Between 200 m and 1000 m a typical North Atlantic intermediate water is found with temperatures ranging from a 3.5°C to 6.0°C and salinities ranging from 34.90°/00 to 34.93°/00 (Husby, ibid).

Because of OWS DELTA's location near the edge of the North Atlantic Drift, the oceanographic conditions at this station are expected to be considerably more complex than those at ALFA, BRAVO, or CHARLIE. The best way to describe the complex oceanographic conditions in this area is in terms of their standard deviations from their mean values. High standard deviations of up to 2.0°C for temperature and 0.50°/00 for salinity at the 400 or 500 m-level indicate the close proximity of a cold, relatively fresh water mass to a warm, saline water mass. The boundary between these water masses forms a frontal zone containing the easterly - flowing North Atlantic Drift which forms the eastward extension of the Gulf Stream system. The occurrence of such large standard deviations over a comparatively small geographical area shows shifts in the position of this system with time. The frontal zone with its downward slope of isotherms to the south caused sharp horizontal as well as vertical changes in the sound velocity profile.

OWS ECHO's location near the northeastern limit of the Sargasso Sea explains the warm, saline water in the upper 200 m and the strong, deep (200-800 m) thermocline found at this station. Seasonal variation of temperature is confined to the upper 200 or 300 m with the maximum layer depth occurring during the winter months. High standard deviations of temperature at this station may be explained by periodic meanderings of Gulf Stream water through this area (Rosebrook, 1971). The two principal water masses observed in the upper 1500 m at this station are the North Atlantic Central Water present at depths from 200 to 800 m and a mixture of Mediterranean Water and North Atlantic Deep Water called Upper North Atlantic Deep Water found at intermediate depths between 800 and 1500 m (Rosebrook, 1971). The large standard deviations of temperatures well below the mixed layer at this station

PROSECUTION IN 3700-67-77

may be caused by vertical motion of the main thermocline induced by internal waves or wind-driven upwelling.

The extremely large variations of salinity and temperature at OWS HOTEL are explained by its location near the northern edge of the Gulf Stream. Strong wind mixing, especially in the colder winter and spring months, and large-scale meanders of the Gulf Stream combine to produce standard deviations in temperature as high as  $5.7^{\circ}\text{C}$  and those in salinity as high as  $1.1^{\circ}/\text{‰}$ . During the winter months the temperature at 400 m has a standard deviation of  $4.20^{\circ}\text{C}$  and a mean value of  $9.31^{\circ}\text{C}$ . Because this depth is well below the mixed layer, the high standard deviation is a strong indication of horizontal meandering of the Gulf Stream. Such large temporal variations in oceanographic conditions over a comparatively small geographical area are important to naval planners because they lead to strong horizontal and vertical gradients of sound velocity.

OWS INDIA, located about 250 miles south of Iceland, shows somewhat more saline, warmer water than OWS ALFA located further west. This warmer, more saline water is associated with the northern branch of the North Atlantic Current which continues across the Wyville Thomson Ridge into the Norwegian Sea (Sverdrup, 1942). Some of this water also turns to the north and west and flows south of Iceland in a westerly direction. The mean sound velocity minimum found at 100 m indicates the formation of a sound channel near this depth.

OWS JULIETT and KILO are both located in the eastward extension of the North Atlantic Current. The former is located in the northern branch of this current, and is characterized by standard deviations of temperature exceeding  $1.0^{\circ}\text{C}$ . Such large standard deviations at depths ranging from 400 to 1000 m are indicative of a frontal zone forming a

dynamic boundary between cold, fresh water to the north and warm, saline North Atlantic Central water to the south. OWS KILO is located in the southern and eastern branch of the North Atlantic Current, a region notably lacking in distinct currents (Sverdrup, 1942). This lack of oceanographic variability is reflected in fairly low standard deviations of temperature and salinity below 100 m.

OWS MIKE, located in the Norwegian Sea, is characterized by anomalously warm, saline water for such a high latitude. Salinities and subsurface temperatures in the Norwegian Sea range from 35.3°/00 and 8°C north of Scotland to 35.0°/00 and 4°C to the northwest of the Spitsbergen Islands (Sverdrup, 1942). The large standard deviations of temperature of over 1°C at depths from 100 to 500 m may be the result of traveling eddies flanking the left-hand side of the Norwegian Current (Sverdrup, 1942).

OWS PAPA, located in the Aleutian (Subarctic) Current, is characterized by salinities in the upper 100 m well under 33.0°/00. The cool temperatures and low salinities at this location are probably the result of high precipitation and cooling combined with the effects of mixing of Kuroshio and Oyashio water in the western Pacific (Sverdrup, 1942) and are characteristic of the Subarctic Water so prominent in the northeastern Pacific. The low standard deviation of temperature and salinity below 200 m attest to the low oceanographic variability in this area. The shallow limiting depths between 2000 and 2500 m together with a bottom depth in excess of 4000 m during the summer months at this station indicate good convergence zones for sound propagation.

The data at OWS VICTOR, located near the southeastern limit of the Kuroshio Extension, reflect the generally lower temperatures and salinities of the North Pacific as compared to the North Atlantic Ocean. The maximum

mean salinity is less than 34.75 ‰, and the maximum mean temperature is only 24.91 °C. On the other hand, OWS HOTEL, located near the northern edge of the Gulf Stream, shows a maximum mean temperature at 26.14 °C at the surface and a maximum mean salinity 34.90 ‰ at 100 m during summer. Standard deviations of temperature at OWS VICTOR are slightly in excess of 2.0 °C between 200 m and 400 m and are most likely the result of meanders of this well-defined western boundary current. Such meanders are likely to produce strong horizontal as well as vertical sound velocity gradients. The salinity minimum between 34.05‰ and 34.07‰ is located at 600 m at the bottom of the main thermocline. This water represents the most northern extension of the North Pacific Intermediate water that flows north along the coast of Japan before reversing as part of the gyre on the right hand side of the Kuroshio (Husby, 1967). This influx of cold, comparatively fresh water at 600 m may produce temporary sound velocity minima at this depth forming sound channels above the mean deep sound channel located at about 900 m.

ACKNOWLEDGMENTS

I wish to thank Dr. Richard W. James, Mr. George L. Hanssen, and Mr. Alvan Fisher, Jr., for their patient assistance in the preparation of the text. Illustrations were done by Mr. Charles Boling using the XYNETICS plotter, and Miss Dayle Nicholson provided secretarial assistance.

REFERENCES

Fairbridge, R. W. (1966) Encyclopedia of Oceanography. Reinhold Publishing Corporation, 1021p.

Husby, D. M. (1967) Oceanographic Observations North Pacific Ocean Station Victor, 34°00'N, 164°00'N, December 1964 - August 1966. United States Coast Guard Oceanographic Report No. 15, CG 373-15, 141p.

Husby, D. M. (1968) Oceanographic Observations North Atlantic Ocean Station Charlie, 52°45'N, 35°30'W, May 1966 - March 1967. United States Coast Guard Oceanographic Report, No. 17, CG-373-17, 148p.

Rosebrook, A. D. (1971) Oceanographic Observations North Atlantic Ocean Station Echo, November 1967 - December 1968. United States Coast Guard Oceanographic Report No. 49, CG 373-49, 343p.

Shuhy, J. L. (1969) Oceanographic Observations North Atlantic Ocean Station Bravo, 56°30'N, 51°00'W, October 1966 - October 1967. United States Coast Guard Oceanographic Report No. 20, CG 373-20, 163p.

Sverdrup, H. U., M. W. Johnson and R. H. Fleming (1942) The Oceans, their Physics, Chemistry, and General Biology. Prentice-Hall, Inc. 1087p.

TABLE I

<u>OWS</u>	<u>POSITION</u>	<u>NATION</u>
ALFA	62° 00' N, 33° 00' W	U. K., France, Netherlands
BRAVO	56° 30' N, 51° 00' W	U. S. A.
CHARLIE	52° 45' N, 35° 30' W	U. S. A.
DELTA	44° 00' N, 41° 00' W	U. S. A.
ECHO	35° 00' N, 48° 00' W	U. S. A.
HOTEL	38° 00' N, 71° 00' W	U. S. A.
INDIA	60° 00' N, 19° 30' W	U. K., France, Netherlands
JULIETT	53° 18' N, 19° 18' W	U. K., France, Netherlands
KILO	45° 00' N, 16° 00' W	U. K., France, Netherlands
MIKE	66° 00' N, 02° 00' E	Norway
NOVEMBER	30° 00' N, 140° 00' W	U. S. A.
PAPA	50° 00' N, 145° 00' W	Canada
VICTOR	34° 00' N, 164° 00' E	U. S. A.

APPENDICES

- A OCEAN WEATHER STATION ALFA - (62°00'N, 33°00'W)
- B OCEAN WEATHER STATION BRAVO - (56°30'N, 51°00'W)
- C OCEAN WEATHER STATION CHARLIE - (52°45'N, 35°30'W)
- D OCEAN WEATHER STATION DELTA - (44°00'N, 41°00'W)
- E OCEAN WEATHER STATION ECHO - (35°00'N, 48°00'W)
- F OCEAN WEATHER STATION HOTEL - (38°00'N, 71°00'W)
- G OCEAN WEATHER STATION INDIA - (60°00'N, 19°30'W)
- H OCEAN WEATHER STATION JULIETT - (53°18'N, 19°18'W)
- I OCEAN WEATHER STATION KILO - (45°00'N, 16°00'W)
- J OCEAN WEATHER STATION MIKE - (66°00'N, 02°00'E)
- K OCEAN WEATHER STATION PAPA - (50°00'N, 145°00'W)
- L OCEAN WEATHER STATION VICTOR - (34°00'N, 164°00'E)

**APPENDIX A**

**OCEAN WEATHER STATION ALFA - (62°00'N, 33°00'W)**

CDR  
OCEAN WEATHER STATION ALFA  
62°00'N, 33°00'W  
NOV 1968  
MURKIN

(W 00-00 W 00-50) - ALFA TWO

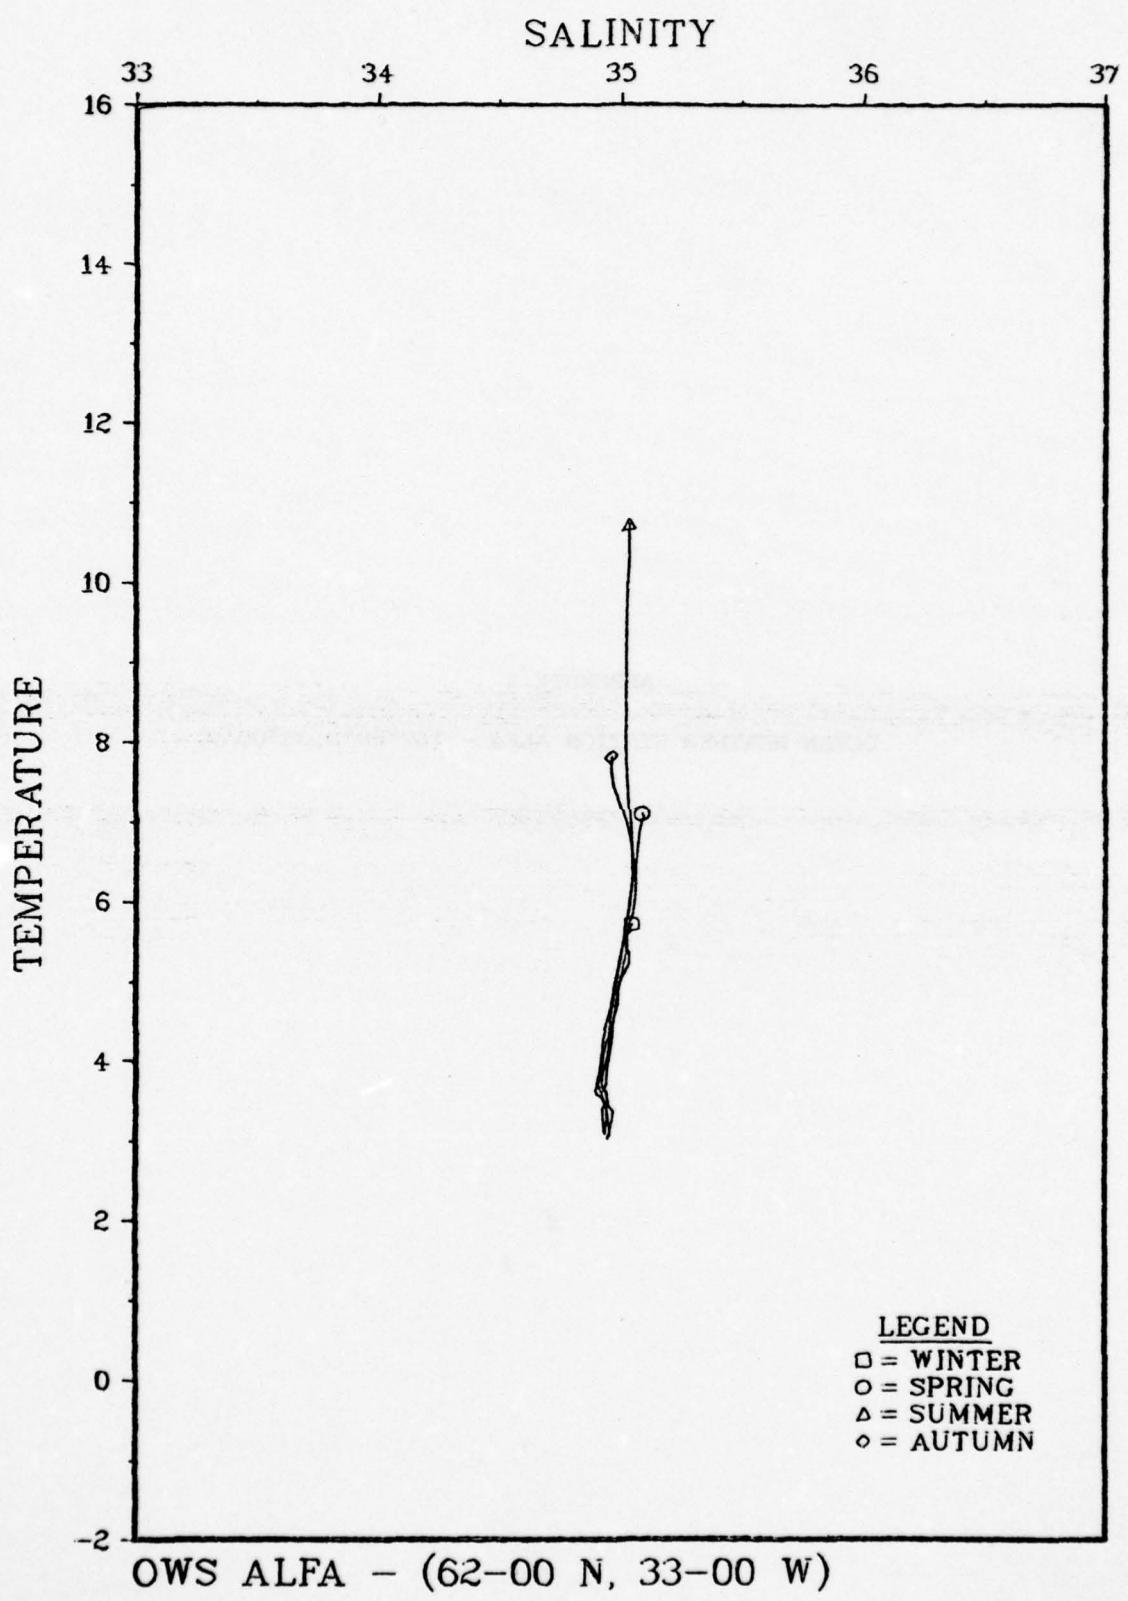


Figure A-1

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	5.72	.43	8	35.04	.06	8	1474.0	.8	8
10	5.67	.36	8	35.03	.03	8	1473.9	.5	8
20	5.65	.35	8	35.03	.05	8	1474.0	.4	8
30	5.62	.34	8	35.04	.04	8	1474.1	.4	8
50	5.57	.32	8	35.02	.03	8	1474.1	.3	8
75	5.54	.32	8	35.02	.02	8	1474.4	.3	8
100	5.41	.34	8	35.02	.02	8	1474.4	.3	8
125	5.38	.40	6	35.02	.02	8	1474.6	.6	6
150	5.36	.41	6	35.03	.02	8	1474.9	.7	6
200	5.22	.44	6	35.03	.02	7	1475.3	.9	5
250	5.05	.54	6	35.00	.03	7	1475.5	.4	5
300	4.96	.56	6	34.99	.03	7	1476.0	.4	5
400	4.71	.50	7	34.98	.03	7	1476.3	.2	7
500	4.50	.59	7	34.97	.03	6	1477.4	.5	6
600	4.25	.40	7	34.96	.02	5	1478.4	.6	5
700	3.92	.31	8	34.94	.05	6	1478.3	.4	6
800	3.72	.22	8	34.94	.05	6	1479.0	.0	6
900	3.66	.15	8	34.93	.04	6	1480.3	.7	6
1000	3.62	.10	8	34.92	.02	7	1481.7	.5	7
1100	3.63	.08	7	34.92	.01	6	1483.4	.4	6
1200	3.61	.09	7	34.94	.01	7	1485.0	.4	7
1300	3.57	.09	7	34.94	.01	7	1486.5	.5	7
1400	3.54	.09	7	34.94	.01	7	1488.1	.4	7
1500	3.51	.10	7	34.94	.01	7	1489.7	.5	7
1750	3.43	.06	8	34.95	.01	8	1493.6	.3	8
2000	3.36	.04	6	34.97	.02	6	1497.6	.4	6
2500	3.01	.00	3	34.94	.01	3	1504.5	.2	3

Figure A-2. OWS ALFA - Winter

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY			
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.
0	7.11	1.05	12	35.08	.04	12	1479.5	4.1
10	7.05	1.03	12	35.09	.05	12	1479.5	4.0
20	7.02	.97	12	35.08	.04	12	1479.5	3.7
30	6.87	.86	12	35.07	.03	12	1479.0	3.4
50	6.49	.69	12	35.06	.04	12	1477.9	2.8
75	6.24	.58	12	35.06	.05	12	1477.3	2.4
100	5.95	.62	12	35.05	.05	12	1476.5	2.5
125	5.82	.60	12	35.04	.05	12	1476.5	2.5
150	5.73	.60	12	35.03	.05	12	1476.5	2.5
200	5.53	.58	12	35.02	.04	12	1476.5	2.4
250	5.36	.57	12	35.02	.04	12	1476.6	2.4
300	5.24	.56	12	35.01	.04	10	1477.3	2.4
400	4.95	.40	11	34.99	.02	9	1477.5	1.6
500	4.71	.36	11	34.99	.03	9	1478.3	1.6
600	4.46	.35	9	34.96	.02	7	1479.2	1.2
700	4.23	.32	9	34.95	.02	7	1479.9	1.0
800	4.04	.31	7	34.94	.02	5	1481.0	.7
900	3.86	.21	7	34.92	.02	5	1481.5	.6
1000	3.73	.16	6	34.92	.01	4	1482.5	.5
1100	3.68	.12	6	34.92	.02	4	1483.9	.4
1200	3.64	.10	6	34.93	.02	6	1485.1	.4
1300	3.62	.10	6	34.94	.02	6	1486.8	.5
1400	3.60	.12	6	34.94	.02	6	1488.4	.5
1500	3.56	.11	6	34.94	.03	6	1489.7	.5
1750	3.48	.09	6	34.95	.02	6	1493.8	.5
2000	3.42	.02	2	34.92	.02	2	1497.7	.0
2500	3.10	.03	2	34.93	.02	2	1504.9	.2

Figure A-3. OWS ALFA - Spring

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	10.75	1.15	73	35.03	.08	73	1493.0	4.2	73
10	10.35	.96	73	35.03	.07	73	1491.8	3.5	73
20	9.96	.89	73	35.02	.07	73	1490.5	3.3	73
30	9.39	.80	73	35.02	.06	73	1488.6	3.0	73
50	8.07	1.04	73	35.02	.06	73	1484.0	4.0	73
75	7.37	.89	72	35.03	.06	73	1481.7	3.5	72
100	6.92	.72	72	35.04	.06	73	1480.4	2.9	72
125	6.59	.68	72	35.04	.06	73	1479.5	2.8	72
150	6.30	.69	72	35.04	.06	73	1478.8	2.9	72
200	6.06	.70	71	35.03	.05	73	1478.6	2.9	71
250	5.84	.72	71	35.02	.05	73	1478.5	3.0	71
300	5.63	.72	72	35.01	.05	73	1478.5	3.0	72
400	5.22	.67	40	34.99	.05	40	1478.4	2.8	40
500	4.85	.57	39	34.97	.04	39	1478.6	2.4	39
600	4.46	.43	72	34.95	.04	72	1478.6	1.6	72
700	4.19	.34	71	34.93	.04	70	1479.1	1.5	70
800	3.98	.26	71	34.92	.03	70	1479.9	1.3	70
900	3.81	.18	70	34.91	.03	69	1480.8	.9	69
1000	3.69	.13	68	34.90	.03	67	1482.0	.8	67
1100	3.66	.14	34	34.91	.02	34	1483.5	.7	34
1200	3.62	.14	34	34.91	.02	34	1485.0	.8	34
1300	3.60	.13	33	34.92	.02	34	1486.7	.7	33
1400	3.59	.12	33	34.92	.02	34	1488.3	.7	33
1500	3.56	.13	34	34.92	.03	36	1489.8	.7	34
1750	3.49	.10	32	34.93	.03	34	1493.8	.5	32
2000	3.40	.11	29	34.94	.03	29	1497.7	.6	29
2500	3.06	.12	9	34.95	.01	8	1504.7	.5	8

Figure A-4. OWS ALFA - Summer

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY				
	MEAN	S.D.	NUM	MEAN	S.D.	NUM			
0	7.83	1.32	29	34.96	.06	29	1482.1	5.0	29
10	7.80	1.24	29	34.96	.06	29	1482.2	4.7	29
20	7.76	1.18	29	34.96	.05	29	1482.2	4.5	29
30	7.68	1.09	29	34.96	.05	29	1482.1	4.2	29
50	7.50	.89	29	34.97	.06	29	1481.7	3.5	29
75	7.20	.62	29	35.00	.05	29	1481.0	2.5	29
100	7.00	.45	29	35.02	.04	29	1480.7	1.9	29
125	6.81	.40	29	35.03	.04	29	1480.4	1.6	29
150	6.65	.41	29	35.04	.04	29	1480.2	1.7	29
200	6.41	.50	29	35.05	.05	29	1480.1	2.1	29
250	6.16	.56	29	35.04	.05	29	1479.8	2.3	29
300	5.91	.63	29	35.03	.06	29	1479.7	2.6	29
400	5.30	.55	12	34.99	.05	12	1478.7	2.2	12
500	4.78	.40	12	34.96	.04	12	1478.3	1.7	12
600	4.40	.31	28	34.93	.03	28	1478.3	1.4	27
700	4.11	.21	27	34.92	.02	27	1478.7	.9	26
800	3.90	.16	27	34.91	.02	27	1479.5	.7	26
900	3.76	.13	27	34.90	.01	27	1480.6	.6	26
1000	3.67	.11	28	34.90	.04	28	1481.9	.6	26
1100	3.62	.07	12	34.89	.01	12	1483.3	.3	12
1200	3.59	.06	12	34.90	.01	12	1484.9	.4	12
1300	3.57	.04	12	34.90	.01	12	1486.5	.4	12
1400	3.56	.05	12	34.91	.01	12	1488.2	.3	12
1500	3.55	.06	12	34.92	.01	12	1489.8	.4	12
1750	3.49	.04	11	34.93	.01	11	1493.8	.3	11
2000	3.41	.02	6	34.94	.01	6	1497.7	.3	6
2500	3.07	.00	1	34.93	.00	1	1504.8	.0	1

Figure A-5. OWS ALFA - Autumn

**APPENDIX B**

**OCEAN WEATHER STATION BRAVO - (56°30'N, 51°00'W)**

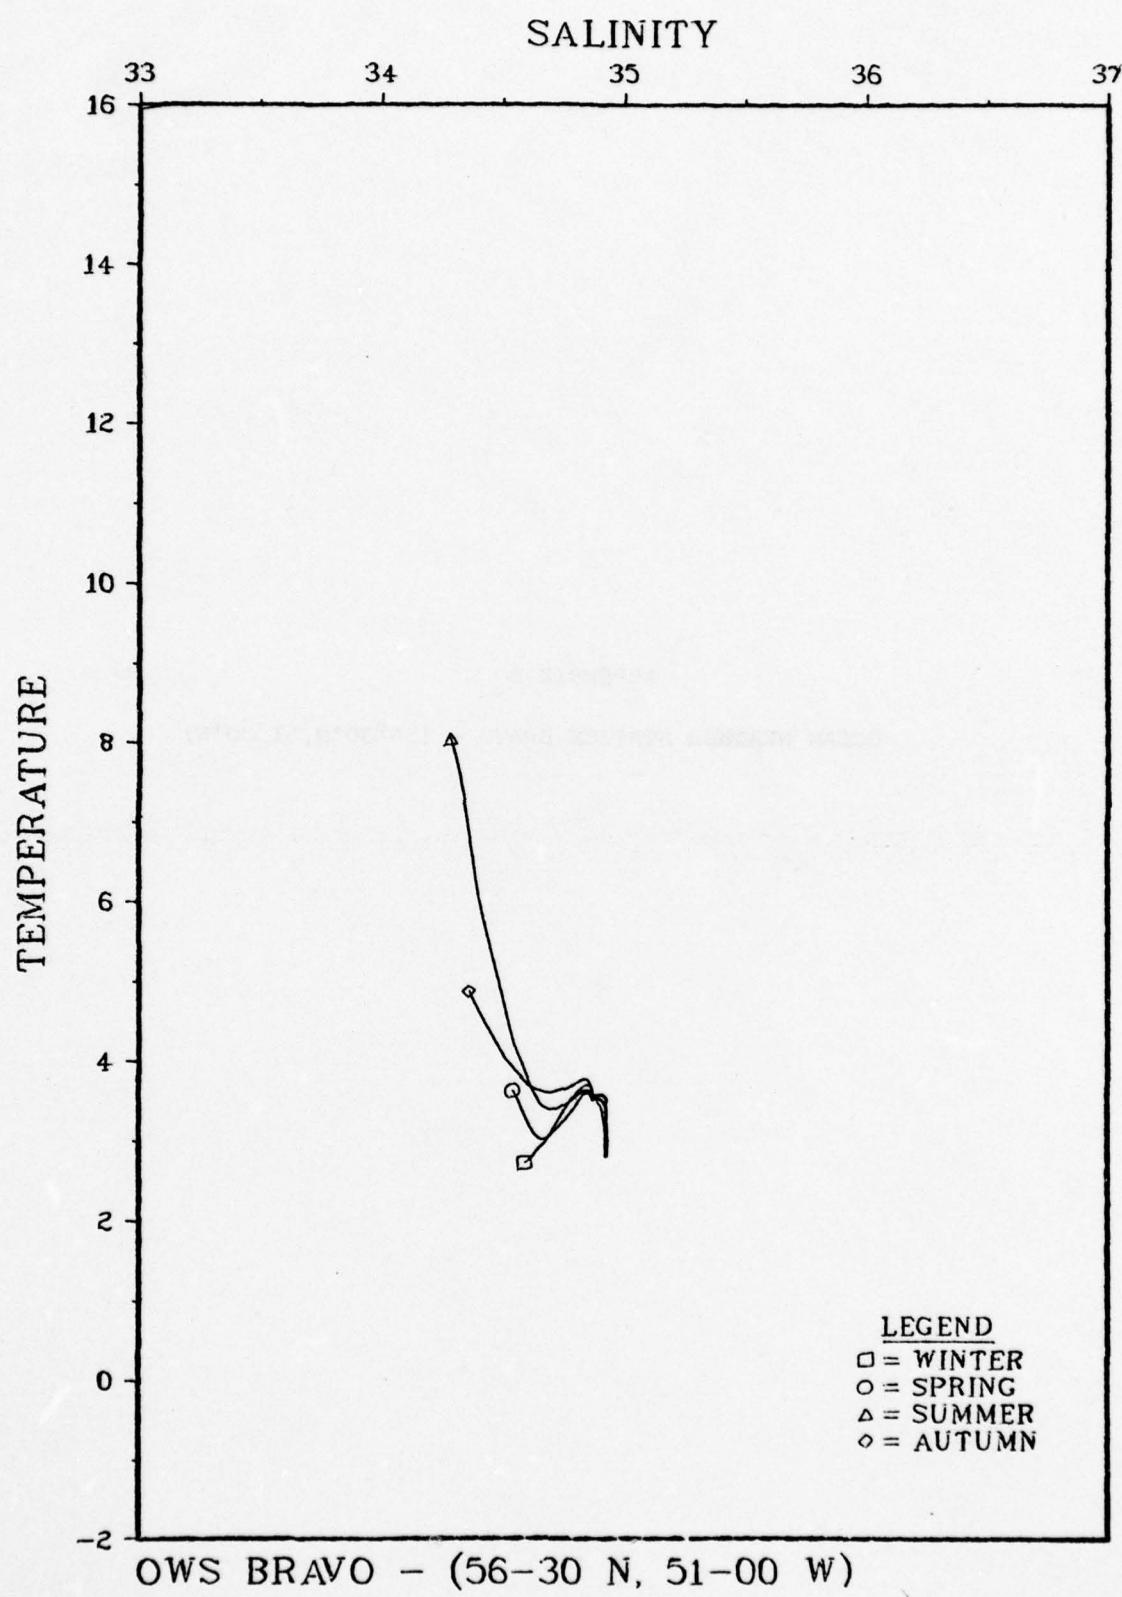


Figure B-1.

DEPTH	MEAN TEMPERATURE S.D.	NUM	MEAN SALINITY S.D.	NUM	MEAN SOUND VELOCITY S.D.	NUM
0	2.72	.65	332	34.59	.16	342
10	2.72	.65	332	34.59	.16	342
20	2.72	.65	332	34.59	.16	342
30	2.73	.64	342	34.59	.16	342
50	2.74	.64	342	34.59	.16	342
75	2.75	.65	342	34.60	.15	341
100	2.78	.65	342	34.61	.15	341
125	2.86	.66	342	34.63	.14	341
150	2.98	.66	342	34.67	.13	341
200	3.39	.51	342	34.75	.09	340
250	3.64	.41	341	34.81	.06	339
300	3.71	.39	341	34.84	.06	336
400	3.72	.34	329	34.86	.05	323
500	3.69	.28	328	34.87	.04	323
600	3.66	.26	332	34.87	.04	327
700	3.63	.23	328	34.87	.04	324
800	3.59	.22	319	34.87	.04	315
900	3.56	.19	301	34.88	.04	297
1000	3.53	.18	235	34.88	.04	232
1100	3.50	.16	161	34.88	.03	162
1200	3.50	.15	148	34.88	.03	148
1300	3.52	.16	148	34.89	.04	148
1400	3.55	.16	150	34.89	.04	150
1500	3.54	.15	141	34.90	.04	140
1750	3.52	.11	60	34.91	.03	60
2000	3.46	.08	55	34.92	.02	55
2500	3.18	.05	46	34.93	.02	46
3000	2.77	.12	31	34.93	.01	31

Figure B-2. OWS BRAVO - Winter

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN	S.D.	NUM	S.D.	MEAN	S.D.
0	3.63	1.03	729	34.54	0.19	730
10	3.57	0.99	730	34.55	0.18	729
20	3.51	0.93	730	34.56	0.18	729
30	3.43	0.86	730	34.57	0.17	729
50	3.24	0.70	730	34.60	0.15	728
75	3.08	0.54	730	34.63	0.14	728
100	3.00	0.48	730	34.66	0.14	727
125	3.02	0.47	730	34.68	0.13	727
150	3.06	0.45	730	34.70	0.12	726
200	3.29	0.37	729	34.76	0.09	725
250	3.51	0.36	729	34.81	0.07	725
300	3.60	0.37	729	34.83	0.06	725
400	3.62	0.37	717	34.85	0.06	714
500	3.59	0.33	714	34.86	0.06	710
600	3.56	0.30	716	34.86	0.06	712
700	3.54	0.27	714	34.87	0.06	710
800	3.52	0.24	708	34.87	0.05	698
900	3.50	0.21	686	34.87	0.05	675
1000	3.48	0.20	592	34.87	0.05	589
1100	3.48	0.19	481	34.87	0.04	480
1200	3.49	0.18	464	34.88	0.05	462
1300	3.51	0.18	463	34.88	0.05	460
1400	3.53	0.17	462	34.89	0.05	459
1500	3.54	0.16	460	34.90	0.05	456
1750	3.51	0.15	84	34.91	0.03	84
2000	3.46	0.13	78	34.93	0.03	78
2500	3.19	0.11	78	34.93	0.02	78
3000	2.80	0.10	75	34.93	0.02	75

Figure B-3. OWS BRAVO - Spring

DEPTH	MEAN	TEMPERATURE S.D.	NUM	SALINITY S.D.	NUM	MEAN SOUND VELOCITY S.U.	NUM
0	8.05	1.20	711	34.26	.25	1482.1	711
10	7.72	1.23	711	34.31	.23	1481.0	5.0
20	7.25	1.35	711	34.34	.23	1479.6	5.3
30	6.20	1.37	711	34.39	.21	1475.7	5.5
50	4.27	0.83	709	34.54	.15	1468.2	3.7
75	3.66	0.50	709	34.62	.12	1466.1	2.6
100	3.44	0.41	709	34.66	.12	1465.6	2.3
125	3.38	0.38	709	34.70	.11	1465.8	2.1
150	3.39	0.35	709	34.73	.10	1466.3	2.0
200	3.49	0.27	709	34.78	.08	1467.7	1.7
250	3.60	0.22	709	34.82	.07	1469.0	1.7
300	3.64	0.22	709	34.84	.06	1470.0	1.8
400	3.64	0.24	697	34.85	.05	1471.7	1.9
500	3.62	0.24	694	34.86	.05	1473.3	1.7
600	3.59	0.24	703	34.86	.05	1474.9	1.7
700	3.57	0.23	703	34.87	.05	1476.4	1.6
800	3.55	0.21	695	34.87	.05	1478.0	1.8
900	3.52	0.19	663	34.87	.05	1479.6	2.1
1000	3.51	0.16	534	34.87	.05	1481.2	1.8
1100	3.51	0.14	405	34.87	.04	1482.9	1.3
1200	3.51	0.13	374	34.87	.04	1484.5	1.1
1300	3.52	0.13	369	34.86	.04	1486.3	1.0
1400	3.54	0.14	374	34.89	.05	1488.1	1.2
1500	3.55	0.15	393	34.89	.05	1489.8	1.4
1750	3.45	0.16	97	34.90	.03	1493.6	0.8
2000	3.42	0.13	95	34.91	.03	1497.7	0.8
2500	3.19	0.10	95	34.92	.03	1605.3	0.7
3000	2.77	0.13	82	34.92	.03	1512.2	0.7

Figure B-4. OWS BRAVO - Summer

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN	S.D.	MEAN	S.D.	MEAN	S.D.
0	4.88	.41	337	.36	.17	.37
10	4.87	.40	337	.36	.17	.37
20	4.86	.40	337	.36	.17	.37
30	4.80	.34	337	.37	.17	.36
50	4.57	.18	337	.41	.16	.36
75	4.02	.75	337	.51	.15	.36
100	3.68	.53	337	.61	.13	.35
125	3.61	.48	337	.67	.11	.35
150	3.59	.43	337	.71	.10	.35
200	3.66	.30	337	.77	.07	.35
250	3.74	.22	337	.81	.05	.34
300	3.78	.20	337	.84	.04	.32
400	3.76	.21	325	.86	.04	.321
500	3.71	.20	321	.86	.04	318
600	3.67	.19	321	.87	.04	322
700	3.64	.19	318	.87	.04	314
800	3.61	.18	312	.87	.04	307
900	3.58	.16	292	.87	.04	289
1000	3.55	.14	221	.87	.04	220
1100	3.54	.13	152	.87	.03	151
1200	3.54	.12	136	.88	.03	136
1300	3.55	.12	137	.88	.03	137
1400	3.57	.13	136	.89	.03	136
1500	3.58	.12	134	.89	.03	134
1750	3.57	.07	39	.92	.03	39
2000	3.52	.05	39	.93	.02	39
2500	3.20	.11	39	.93	.02	39
3000	2.61	.13	31	.93	.01	31
						1512.3 .6
						31

Figure B-5. OWS BRAVO - Autumn

**APPENDIX C**

**OCEAN WEATHER STATION CHARLIE - (52°45'N, 35°30'W)**

(W-05-00-1963, - STANDARD TWO

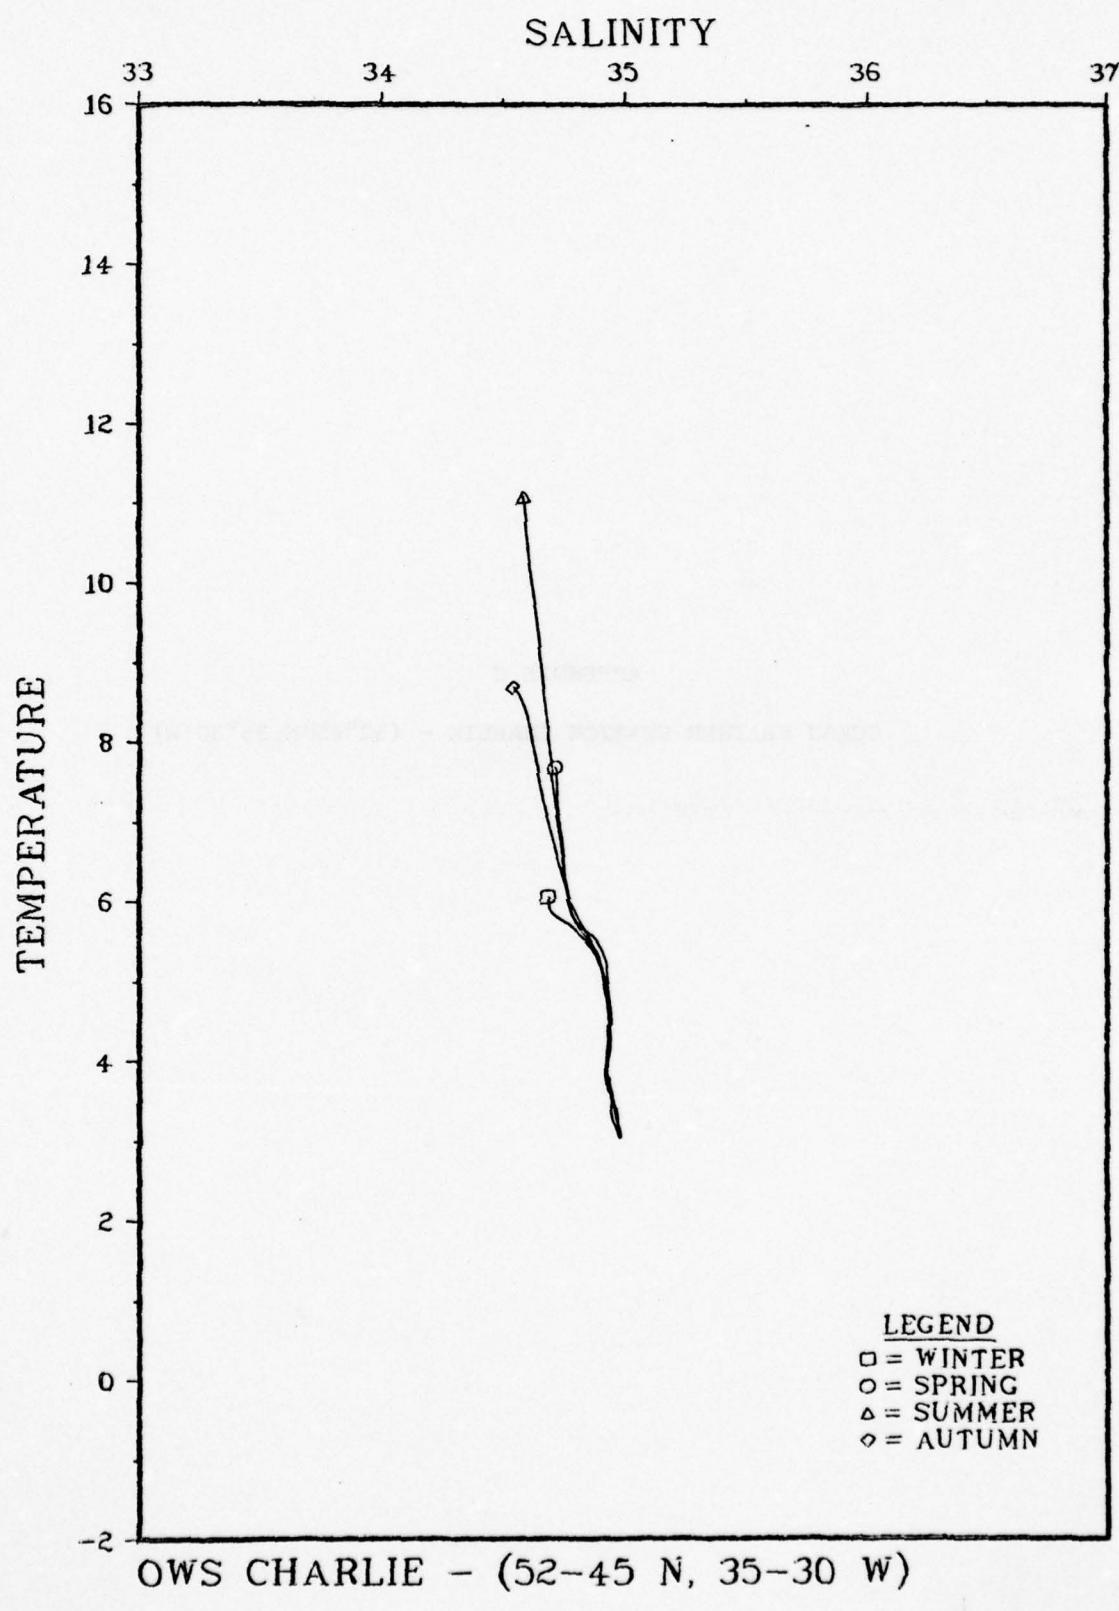


Figure C-1.

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN	S.D.	NUM	S.D.	MEAN	S.D.
0	6.05	.79	259	.08	259	.3
10	6.04	.79	259	.08	259	.3
20	6.03	.79	259	.08	259	.3
30	6.02	.78	259	.08	259	.2
50	5.97	.74	259	.08	259	.2
75	5.88	.67	259	.08	259	.1
100	5.81	.64	259	.08	259	.08
125	5.75	.62	259	.07	259	.08
150	5.70	.61	259	.07	257	.07
200	5.52	.55	259	.07	256	.07
250	5.35	.48	258	.07	256	.06
300	5.16	.41	258	.05	255	.05
400	4.80	.30	241	.04	243	.04
500	4.50	.22	239	.04	242	.04
600	4.28	.17	240	.04	243	.04
700	4.10	.14	243	.04	244	.04
800	3.97	.11	241	.03	238	.03
900	3.86	.09	227	.04	224	.04
1000	3.78	.08	166	.03	164	.03
1100	3.73	.08	134	.03	133	.03
1200	3.68	.08	128	.03	127	.03
1300	3.64	.07	128	.03	127	.03
1400	3.59	.07	127	.03	126	.03
1500	3.54	.06	127	.03	126	.03
1750	3.40	.09	14	.02	13	.02
2000	3.26	.08	12	.02	11	.02
2500	3.09	.05	12	.02	11	.02
3000	3.00	.06	9	.02	8	.02

Figure C-2. OWS CHARLIE - Winter

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	7.68	1.25	519	34.71	.12	520	1481.2	5.0	519
10	7.60	1.20	520	34.72	.11	518	1481.1	4.8	518
20	7.47	1.13	520	34.72	.11	518	1480.8	4.6	518
30	7.27	1.00	520	34.72	.11	518	1480.2	4.2	518
50	6.82	.85	520	34.74	.10	518	1478.8	3.7	518
75	6.33	.75	520	34.75	.10	518	1477.3	3.3	518
100	6.02	.69	520	34.77	.09	517	1476.5	3.1	517
125	5.83	.64	520	34.78	.09	517	1476.1	3.0	517
150	5.71	.62	520	34.80	.08	516	1476.1	3.0	516
200	5.55	.60	519	34.84	.08	515	1476.3	2.8	514
250	5.36	.57	519	34.88	.07	513	1476.4	2.8	512
300	5.19	.48	519	34.90	.06	512	1476.6	2.5	511
400	4.80	.31	504	34.92	.05	496	1476.6	1.8	494
500	4.52	.23	498	34.93	.05	492	1477.2	1.7	491
600	4.29	.18	500	34.93	.04	495	1477.9	1.7	493
700	4.10	.15	497	34.92	.04	493	1478.7	1.8	490
800	3.96	.12	485	34.92	.04	482	1479.8	1.9	478
900	3.85	.10	448	34.92	.05	445	1481.0	1.8	442
1000	3.78	.09	352	34.92	.04	352	1482.4	.9	349
1100	3.71	.09	280	34.92	.04	280	1483.8	1.2	279
1200	3.66	.08	272	34.93	.04	272	1485.2	.8	272
1300	3.61	.08	272	34.93	.04	271	1486.7	.8	271
1400	3.57	.07	273	34.94	.03	272	1488.2	1.0	272
1500	3.52	.07	262	34.94	.03	261	1489.7	1.3	261
1750	3.36	.07	32	34.97	.03	31	1493.3	.5	31
2000	3.25	.07	29	34.97	.03	28	1497.1	.4	28
2500	3.10	.07	27	34.98	.02	26	1505.0	.5	26
3000	3.01	.09	17	34.98	.01	17	1513.2	.5	17

Figure C-3. OWS CHARLIE - Spring

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	1.007	.99	458	34.58	.13	458	1493.6	.7	458
10	10.82	1.11	458	34.59	.12	457	1492.9	.2	457
20	10.41	1.21	458	34.60	.12	457	1491.6	.6	457
30	9.71	1.35	458	34.63	.11	457	1489.2	.2	457
50	7.88	1.27	458	34.69	.11	457	1482.8	.0	457
75	6.52	.85	458	34.74	.10	457	1478.0	.7	457
100	6.00	.77	458	34.76	.10	457	1476.4	.5	457
125	5.79	.76	458	34.79	.09	457	1476.0	.4	457
150	5.68	.76	458	34.82	.08	457	1476.0	.4	457
200	5.56	.77	458	34.87	.08	455	1476.4	.5	455
250	5.41	.74	458	34.90	.08	454	1476.6	.4	454
300	5.21	.65	458	34.92	.07	451	1476.7	.0	451
400	4.83	.42	438	34.93	.06	432	1476.8	.2	430
500	4.54	.28	432	34.94	.05	427	1477.2	.7	424
600	4.31	.20	436	34.94	.05	431	1478.0	.5	428
700	4.13	.16	438	34.93	.05	435	1478.8	.8	429
800	3.97	.13	432	34.93	.05	429	1479.9	.8	425
900	3.86	.11	397	34.93	.05	393	1481.0	.5	390
1000	3.78	.09	288	34.93	.05	285	1482.4	.9	282
1100	3.71	.08	200	34.93	.06	197	1483.8	0	197
1200	3.65	.08	188	34.94	.06	186	1485.2	0	186
1300	3.60	.08	186	34.94	.07	185	1486.7	.6	185
1400	3.55	.09	187	34.94	.07	186	1488.2	.7	186
1500	3.50	.07	189	34.95	.07	188	1489.6	0	188
1750	3.33	.06	27	34.96	.03	27	1493.2	.5	27
2000	3.22	.07	26	34.97	.03	26	1496.9	.5	26
2500	3.10	.07	25	34.98	.02	25	1505.0	.5	25
3000	3.03	.07	16	34.98	.01	16	1513.3	.4	16

Figure C-4. OWS CHARLIE - Summer

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	8.69	.11	300	34.54	.14	300
10	8.67	.10	300	34.55	.14	297
20	8.66	.09	300	34.55	.14	297
30	8.62	.07	300	34.56	.13	297
50	8.40	.00	300	34.59	.12	297
75	7.31	.91	300	34.66	.10	297
100	6.57	.85	300	34.72	.09	297
125	6.09	.73	300	34.76	.07	297
150	5.84	.66	299	34.80	.07	297
200	5.56	.59	299	34.85	.06	296
250	5.38	.54	299	34.88	.06	296
300	5.19	.50	296	34.90	.05	296
400	4.84	.37	282	34.93	.05	291
500	4.56	.27	281	34.94	.05	291
600	4.33	.20	284	34.94	.04	291
700	4.16	.16	290	34.94	.04	288
800	4.01	.13	281	34.93	.04	281
900	3.89	.11	265	34.93	.04	262
1000	3.81	.09	213	34.93	.04	211
1100	3.75	.08	167	34.94	.04	166
1200	3.69	.08	165	34.94	.03	164
1300	3.64	.08	165	34.94	.03	164
1400	3.59	.08	165	34.95	.03	164
1500	3.53	.08	153	34.95	.03	153
1750	3.37	.09	41	34.96	.02	41
2000	3.25	.10	35	34.97	.02	35
2500	3.10	.07	31	34.98	.02	31
3000	3.03	.05	24	34.98	.02	24

Figure C-5.<sup>1</sup> OWS CHARLIE - Autumn

APPENDIX D

OCEAN WEATHER STATION DELTA - (44°00'N, 41°00'W)

OWS DELTA - (44-00-N 41-00-W)

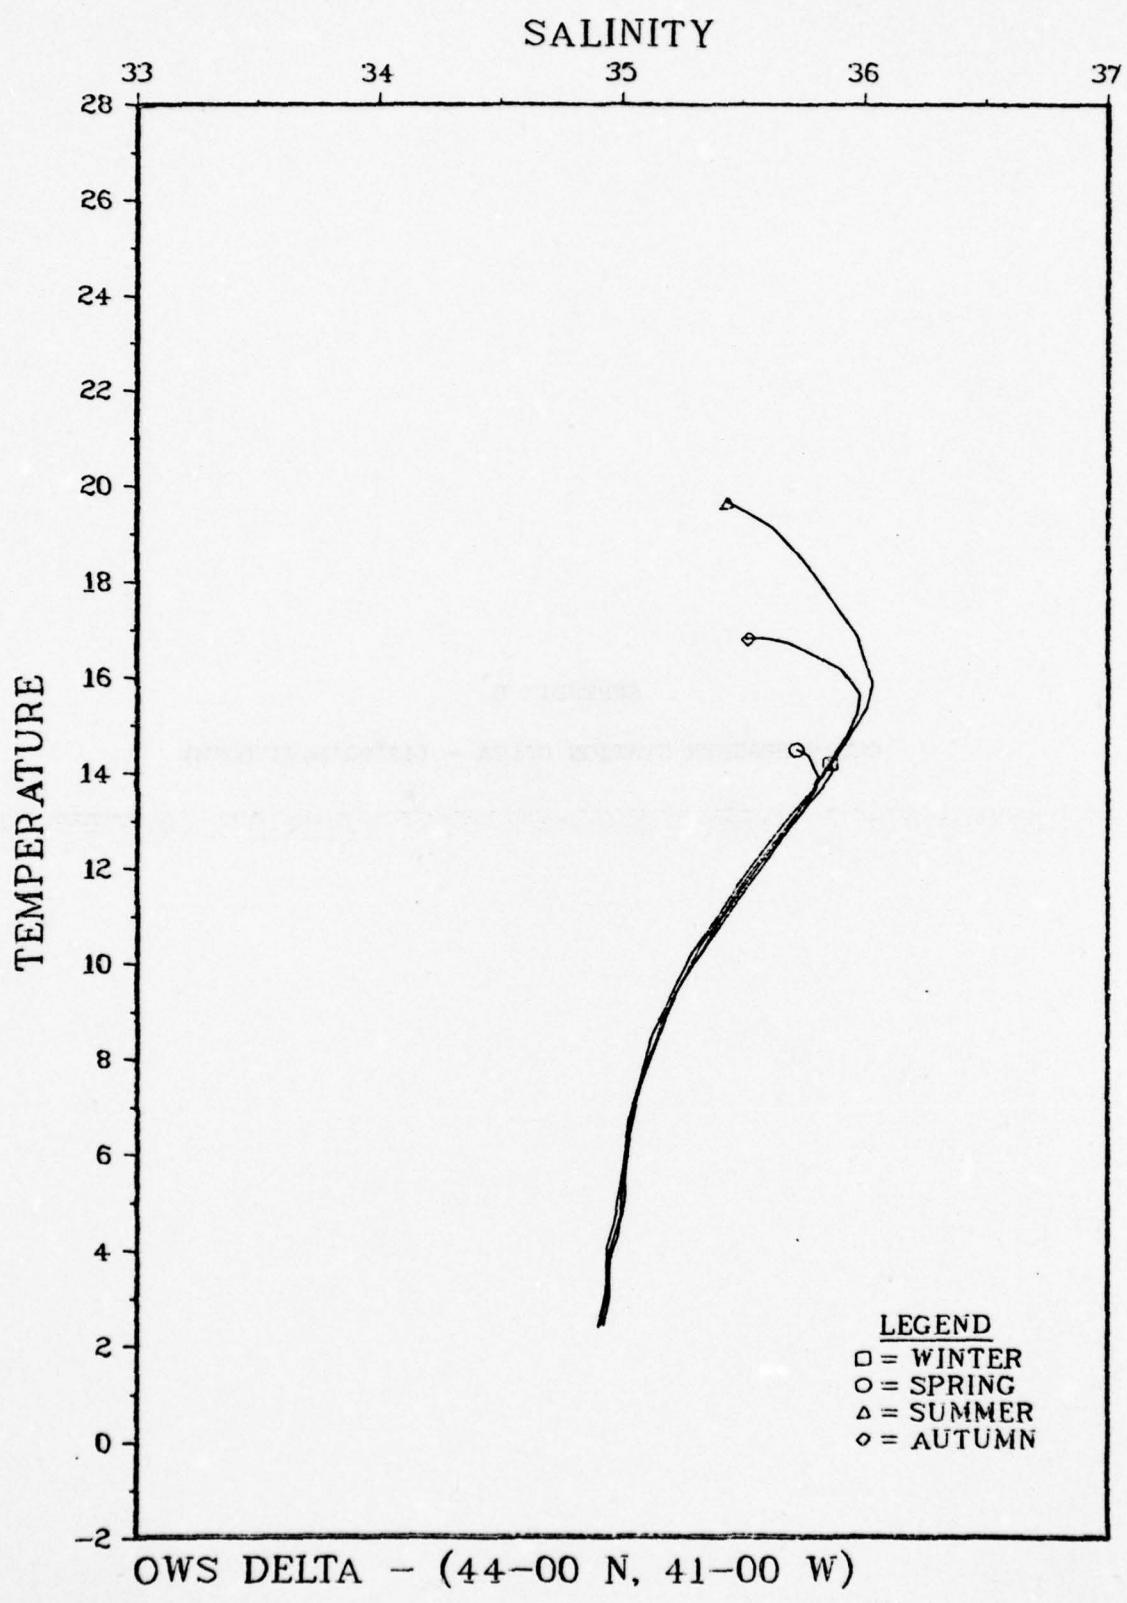


Figure D-1.

DEPTH	MEAN S.D.	TEMPERATURE NUM	MEAN S.D.	SALINITY NUM	MEAN S.D.	SOUND VELOCITY S.D. NUM
0	14.21	.85	243	35.86	.15	246
10	14.21	.85	243	35.86	.15	244
20	14.20	.86	243	35.86	.15	244
30	14.19	.86	245	35.86	.15	244
50	14.16	.87	246	35.86	.14	244
75	14.14	.88	245	35.87	.14	244
100	14.11	.91	245	35.87	.14	244
125	14.06	.93	245	35.87	.14	244
150	14.01	.93	245	35.87	.14	244
200	13.85	.89	244	35.85	.14	240
250	13.66	.92	243	35.82	.15	239
300	13.43	1.00	243	35.78	.17	239
400	12.53	1.28	235	35.64	.21	229
500	11.09	1.09	236	35.43	.23	229
600	9.33	1.57	235	35.22	.18	227
700	7.75	1.25	232	35.10	.11	224
800	6.52	.85	218	35.03	.06	210
900	5.71	.55	189	35.01	.05	182
1000	5.17	.39	139	35.00	.05	134
1100	4.86	.31	91	35.00	.04	90
1200	4.61	.28	74	34.99	.04	74
1300	4.40	.24	69	34.99	.04	69
1400	4.25	.21	67	34.98	.04	67
1500	4.12	.17	62	34.97	.04	62
1750	3.83	.10	18	34.95	.02	18
2000	3.67	.08	15	34.95	.03	15
2500	3.37	.06	15	34.95	.02	15
3000	3.04	.06	14	34.95	.03	14
4000	2.42	.05	9	34.92	.04	9

Figure D-2. OWS DELTA - Winter

DEPTH	MEAN TEMPERATURE	S.D.	NUM	MEAN SALINITY	S.D.	NUM	MEAN SOUND	S.D.	VELOCITY
0	14.50	1.73	421	35.72	.34	427	1506.5	6.0	421
10	14.42	1.64	421	35.75	.31	422	1506.4	5.8	416
20	14.35	1.58	421	35.77	.30	422	1506.4	5.6	416
30	14.22	1.46	425	35.78	.29	422	1506.2	5.3	420
50	14.03	1.35	427	35.80	.28	422	1505.9	5.0	422
75	13.90	1.22	427	35.81	.26	422	1505.9	4.6	422
100	13.77	1.16	427	35.80	.24	421	1505.9	4.4	421
125	13.65	1.14	427	35.80	.23	421	1505.9	4.3	421
150	13.54	1.14	427	35.78	.22	421	1506.0	4.4	421
200	13.23	1.31	427	35.75	.24	419	1505.7	5.1	419
250	12.84	1.62	426	35.69	.27	418	1505.1	6.2	417
300	12.38	1.89	424	35.63	.29	415	1504.2	7.3	412
400	11.21	2.07	406	35.46	.27	398	1501.5	8.1	393
500	9.58	1.91	400	35.25	.21	393	1497.1	7.5	389
600	8.02	1.55	392	35.11	.14	385	1492.8	6.2	382
700	6.72	1.12	391	35.03	.10	379	1489.4	4.6	377
800	5.84	.77	380	35.01	.07	363	1487.5	3.3	362
900	5.26	.56	346	34.99	.06	325	1486.8	2.4	324
1000	4.82	.43	270	34.98	.05	259	1486.7	2.0	258
1100	4.48	.32	164	34.96	.04	161	1487.0	1.4	161
1200	4.28	.25	140	34.95	.03	138	1487.8	1.2	138
1300	4.11	.18	137	34.94	.04	135	1488.8	.9	135
1400	4.00	.15	134	34.94	.03	132	1490.0	1.0	132
1500	3.91	.13	125	34.94	.03	123	1491.3	.8	123
1750	3.77	.10	62	34.94	.02	60	1494.9	.8	60
2000	3.65	.07	50	34.94	.02	50	1498.7	.6	50
2500	3.35	.06	48	34.94	.02	48	1506.0	.6	48
3000	3.02	.06	47	34.93	.02	47	1513.2	.5	47
4000	2.39	.04	16	34.90	.01	16	1527.9	.3	16

Figure D-3. OWS DELTA - Spring

DEPTH	MEAN S.D.	TEMPERATURE NUM	MEAN S.D.	SALINITY S.D.	NUM	MEAN S.D.	SOUND VELOCITY NUM
0	19.67	2.00	497	35.43	48	504	1521.5
10	19.43	1.85	497	35.52	.39	504	1521.2
20	19.13	1.80	498	35.62	.36	504	1520.6
30	18.46	1.74	504	35.74	.32	504	1519.0
50	16.87	1.62	504	35.97	.27	504	1515.0
75	15.88	1.33	504	36.03	.24	502	1512.5
100	15.37	1.25	504	36.01	.23	501	1511.3
125	15.01	1.16	504	35.97	.21	501	1510.5
150	14.69	1.09	504	35.93	.20	500	1509.9
200	14.15	.98	504	35.86	.17	500	1508.9
250	13.68	.94	503	35.79	.17	499	1508.1
300	13.22	.99	502	35.73	.17	496	1507.4
400	12.11	1.20	488	35.56	.19	484	1505.0
500	10.48	1.42	478	35.34	.19	474	1500.6
600	8.84	1.40	460	35.17	.16	454	1496.1
700	7.44	1.23	444	35.08	.12	437	1492.3
800	6.41	.97	431	35.04	.08	413	1489.9
900	5.70	.68	397	35.02	.06	379	1488.7
1000	5.18	.48	309	35.01	.06	298	1488.2
1100	4.77	.33	205	35.00	.04	197	1488.2
1200	4.50	.24	187	34.98	.04	182	1488.8
1300	4.29	.19	177	34.97	.04	173	1489.6
1400	4.13	.16	167	34.96	.06	163	1490.6
1500	4.00	.14	153	34.95	.05	149	1491.7
1750	3.82	.12	41	34.94	.03	39	1495.2
2000	3.69	.10	32	34.94	.03	30	1498.8
2500	3.37	.07	31	34.94	.02	30	1506.0
3000	3.01	.08	30	34.93	.02	30	1513.1
4000	2.40	.06	10	34.90	.01	10	1528.0

Figure D-4. OWS DELTA - Summer

DEPTH	MEAN S.D.	TEMPERATURE NUM	MEAN S.D.	SALINITY S.D.	NUM	MEAN S.D.	SOUND NUM	VELOCITY S.D.
0	16.82	1.32	436	35.52	0.39	440	1513.5	4.1
10	16.83	1.33	436	35.51	0.35	378	1514.0	4.4
20	16.84	1.34	436	35.54	0.31	378	1514.2	4.4
30	16.84	1.33	439	35.58	0.29	378	1514.4	4.4
50	16.74	1.28	440	35.69	0.26	378	1514.6	4.3
75	16.19	1.16	439	35.90	0.26	378	1513.5	4.1
100	15.63	1.24	438	35.98	0.24	378	1512.2	4.5
125	15.24	1.21	438	35.97	0.22	378	1511.3	4.5
150	14.88	1.13	438	35.94	0.20	377	1510.6	4.2
200	14.25	.97	437	35.86	0.17	376	1509.2	3.7
250	13.73	.90	434	35.79	0.16	377	1508.2	3.5
300	13.22	.94	430	35.71	0.16	376	1507.1	3.7
400	11.99	1.18	409	35.53	0.19	361	1504.2	4.6
500	10.28	1.36	404	35.30	0.18	353	1499.4	5.4
600	8.57	1.30	410	35.13	0.14	350	1494.5	5.2
700	7.21	1.06	398	35.06	0.09	335	1490.9	4.3
800	6.24	.79	363	35.03	0.07	311	1488.9	3.3
900	5.61	.59	347	35.02	0.06	296	1488.0	2.6
1000	5.12	.43	279	35.02	0.06	235	1487.8	1.9
1100	4.73	.28	214	35.00	0.05	176	1487.9	1.2
1200	4.46	.22	198	34.98	0.04	160	1488.5	1.0
1300	4.25	.17	184	34.97	0.04	148	1489.3	.9
1400	4.10	.15	177	34.96	0.04	141	1490.3	.9
1500	3.98	.13	158	34.95	0.04	125	1491.5	.8
1750	3.84	.10	27	34.95	0.03	27	1495.2	.5
2000	3.68	.05	23	34.95	0.03	23	1498.8	.3
2500	3.39	.05	22	34.95	0.03	22	1506.1	.3
3000	3.04	.07	19	34.94	0.03	19	1513.3	.4
4000	2.93	.06	10	34.91	.01	10	1528.1	.4
								10

Figure D-5. OWS DELTA - Autumn

APPENDIX E

OCEAN WEATHER STATION ECHO - (35°00'N, 48°00'W)

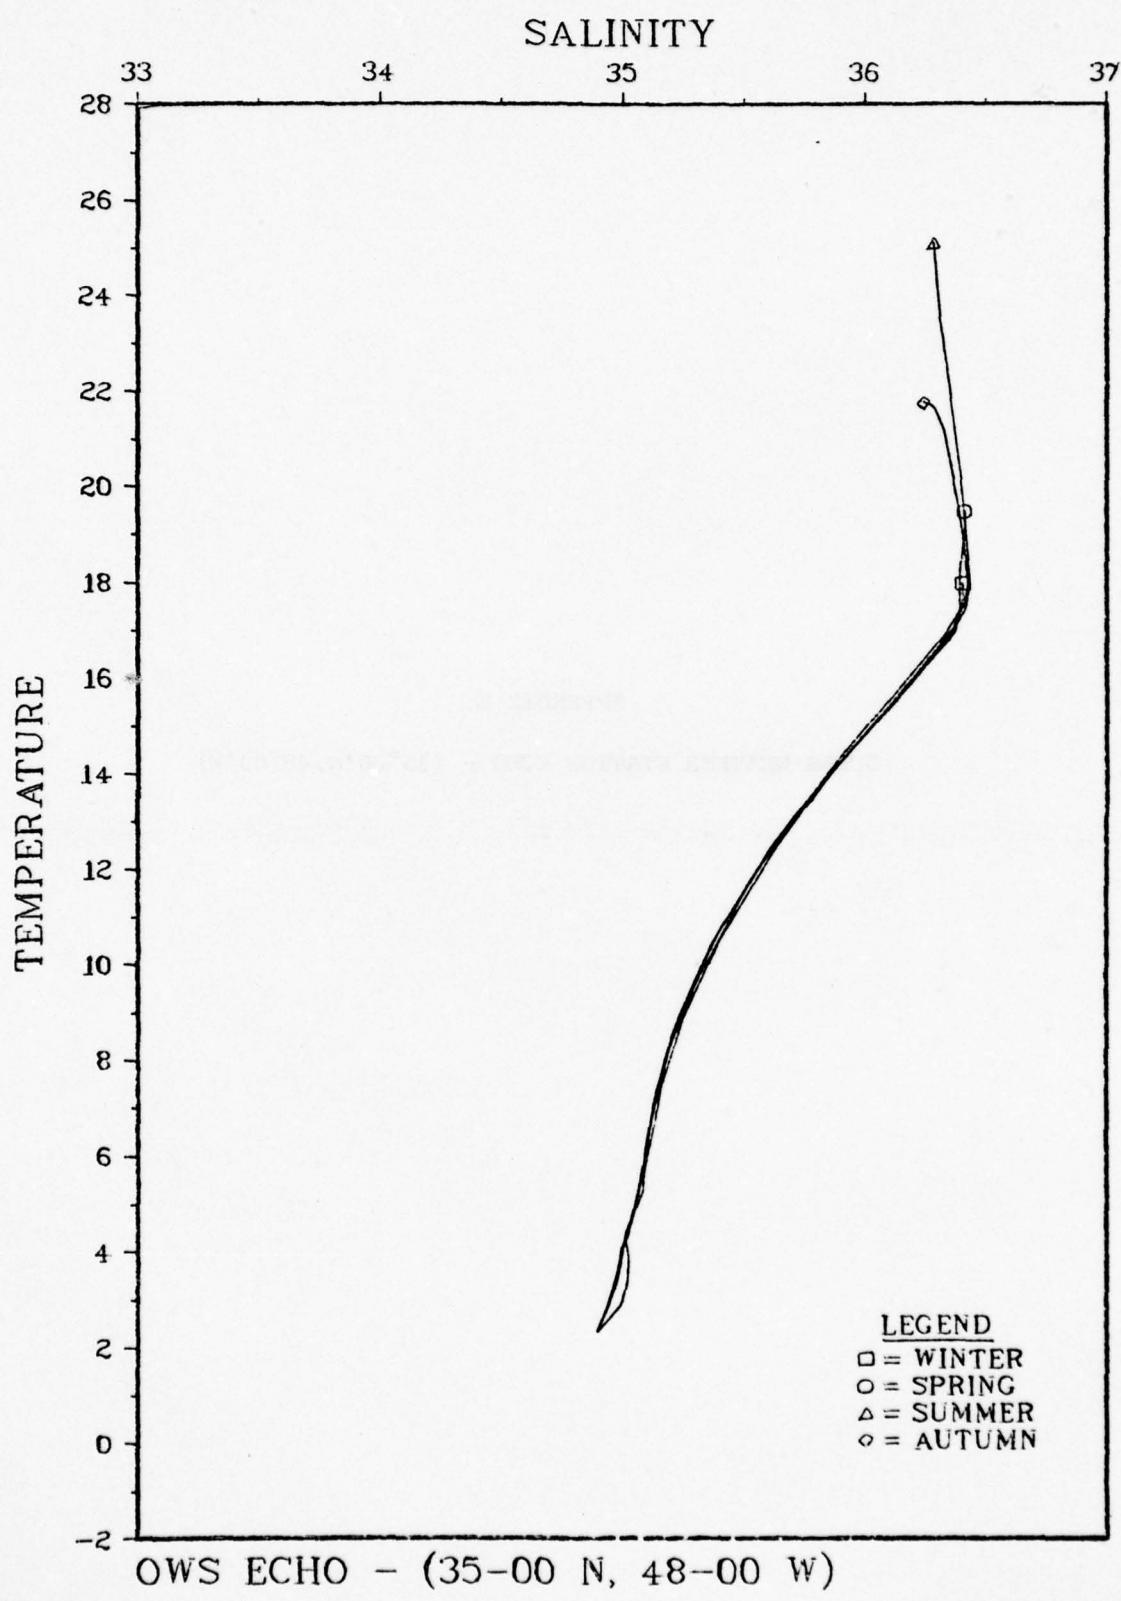


Figure E-1.

DEPTH	MEAN	TEMPERATURE	NUM	MEAN	SALINITY	NUM	MEAN	S.D.	VELOCITY	S.D.	NUM
0	17.98	6.2	347	36.40	.07	349	1518.1	2.1	347		
10	17.97	6.2	347	36.40	.07	337	1518.2	2.2	335		
20	17.95	6.3	347	36.40	.07	337	1518.3	2.2	335		
30	17.93	6.4	349	36.40	.07	337	1518.5	2.2	337		
50	17.90	6.4	349	36.40	.07	337	1518.7	2.2	337		
75	17.86	6.3	349	36.40	.07	337	1519.0	2.1	337		
100	17.81	6.1	349	36.40	.07	337	1519.2	2.1	337		
125	17.73	5.7	349	36.40	.07	336	1519.4	2.0	336		
150	17.65	5.5	348	36.40	.07	336	1519.6	2.0	335		
200	17.43	5.9	346	36.39	.08	336	1519.7	2.2	333		
250	17.19	.70	342	36.36	.11	336	1519.8	2.5	329		
300	16.87	.86	341	36.32	.15	337	1519.6	3.0	329		
400	15.92	1.02	339	36.16	.22	331	1518.1	4.3	324		
500	14.43	1.49	341	35.91	.24	329	1514.6	5.2	327		
600	12.51	1.69	335	35.62	.24	323	1509.4	6.1	320		
700	10.48	1.71	325	35.37	.19	311	1503.7	6.3	309		
800	8.64	1.50	315	35.21	.13	306	1498.4	5.7	301		
900	7.24	1.17	295	35.13	.09	282	1494.7	4.5	279		
1000	6.22	.82	238	35.10	.07	227	1492.4	3.4	226		
1100	5.52	.61	175	35.07	.06	167	1491.3	2.5	167		
1200	5.06	.47	152	35.05	.05	146	1491.1	2.0	146		
1300	4.76	.39	144	35.04	.05	138	1491.5	1.8	138		
1400	4.52	.33	134	35.02	.04	129	1492.2	1.6	129		
1500	4.32	.24	100	35.01	.03	98	1493.1	1.2	98		
1750	3.91	.12	26	34.99	.02	25	1495.6	.6	25		
2000	3.68	.08	25	34.98	.02	24	1498.8	.5	24		
2500	3.29	.07	24	34.96	.02	23	1505.7	.4	23		
3000	2.90	.08	23	34.94	.02	22	1512.6	.6	22		
4000	2.32	.04	4	34.89	.01	4	1527.5	.3	4		

Figure E-2. OWS ECHO - Winter

DEPTH	TEMPERATURE		SALINITY	SOUND	VELOCITY				
	MEAN	S.D.		MEAN	S.D.	NUM			
0	19.49	1.80	71.0	36.41	.12	71.0	1522.2	5.2	71.0
10	19.20	1.58	71.0	36.41	.10	71.0	1521.6	4.7	71.0
20	18.82	1.33	71.0	36.40	.09	71.0	1520.7	4.1	71.0
30	18.40	1.06	71.0	36.39	.09	71.0	1519.7	3.5	71.0
50	17.72	.68	71.0	36.39	.09	71.0	1518.1	2.7	71.0
75	17.35	.53	71.0	36.39	.08	71.0	1517.4	2.3	71.0
100	17.19	.48	71.0	36.38	.09	71.0	1517.4	2.2	71.0
125	17.08	.48	71.0	36.37	.09	71.0	1517.5	2.1	71.0
150	16.99	.49	71.0	36.37	.09	71.0	1517.6	2.3	71.0
200	16.78	.60	70.8	36.34	.12	71.0	1517.7	2.7	70.8
250	16.55	.75	70.6	36.30	.15	71.0	1517.6	3.1	70.6
300	16.26	.93	70.6	36.25	.18	71.0	1517.7	3.6	70.6
400	15.45	1.20	69.8	36.11	.22	70.2	1516.6	4.4	69.8
500	14.21	1.41	69.7	35.89	.23	69.8	1514.0	5.1	69.7
600	12.63	1.53	69.7	35.64	.22	69.6	1510.1	5.6	69.6
700	10.75	1.47	68.4	35.40	.17	66.9	1504.9	5.6	68.3
800	8.91	1.21	67.2	35.23	.11	67.8	1499.7	4.8	67.1
900	7.43	.84	66.0	35.15	.09	66.6	1495.7	3.6	65.9
1000	6.33	.61	63.1	35.10	.08	63.8	1493.0	2.7	63.1
1100	5.61	.41	56.9	35.08	.07	57.1	1491.8	2.2	56.8
1200	5.14	.32	56.0	35.06	.07	55.9	1491.5	1.9	55.9
1300	4.81	.25	55.4	35.04	.06	55.3	1491.8	1.7	55.3
1400	4.55	.20	54.3	35.03	.05	54.2	1492.4	1.6	54.2
1500	4.33	.16	50.9	35.02	.05	50.8	1493.1	1.5	50.8
1750	4.03	.11	55	34.99	.02	55	1496.1	.7	55
2000	3.79	.08	53	34.99	.02	53	1499.3	.6	53
2500	3.36	.07	53	34.97	.02	53	1506.0	.5	53
3000	2.91	.08	50	34.94	.02	50	1512.7	.5	50
4000	2.29	.04	8	34.89	.01	8	1527.4	.3	8

Figure E-3. OWS ECHO - Spring

DEPTH	MEAN	TEMPERATURE	NUM	MEAN	SALINITY	NUM	MEAN	S.D.	VELOCITY	NUM	MEAN	S.D.
0	25.10	1.10	396	36.28	.26	399	1536.4	.9	2.9	396	3.1	.393
10	24.56	1.20	396	36.29	.24	396	1535.3	.1	3.1	393	3.0	.393
20	23.87	1.49	396	36.30	.23	396	1533.8	.9	3.9	393	3.0	.393
30	22.74	1.62	396	36.33	.21	396	1531.2	.2	4.2	393	4.0	.393
50	20.33	1.51	398	36.39	.13	396	1525.3	.3	4.3	395	4.0	.395
75	18.68	1.10	398	36.42	.10	395	1521.3	.3	3.4	394	3.0	.394
100	17.97	.81	398	36.43	.08	395	1519.7	.7	2.8	394	2.0	.394
125	17.65	.66	398	36.42	.08	394	1519.2	.2	2.5	393	2.0	.393
150	17.41	.58	398	36.41	.09	394	1518.9	.3	2.3	393	2.0	.393
200	17.06	.62	399	36.37	.11	394	1518.6	.6	2.4	394	2.0	.394
250	16.75	.75	399	36.32	.14	393	1518.5	.5	2.9	393	2.0	.393
300	16.42	.91	399	36.27	.17	393	1518.2	.3	3.3	393	3.0	.393
400	15.49	1.24	384	36.11	.22	378	1516.7	.7	4.4	375	4.0	.375
500	14.16	1.43	379	35.88	.23	373	1513.9	.9	5.1	370	5.0	.370
600	12.50	1.54	385	35.64	.21	381	1509.6	.6	5.7	378	5.0	.378
700	10.61	1.50	386	35.41	.16	370	1504.3	.3	5.7	369	5.0	.369
800	8.86	1.26	384	35.25	.11	367	1499.4	.0	5.0	365	5.0	.365
900	7.46	.95	354	35.16	.08	336	1495.7	.9	3.9	334	3.0	.334
1000	6.43	.71	275	35.12	.07	257	1493.3	.3	3.0	257	3.0	.257
1100	5.73	.49	180	35.09	.06	173	1492.2	.2	2.1	173	2.0	.173
1200	5.24	.37	158	35.08	.05	157	1491.9	.7	1.7	157	1.0	.157
1300	4.87	.30	153	35.05	.04	152	1492.1	.4	1.4	152	1.0	.152
1400	4.57	.22	139	35.03	.04	137	1492.5	.1	1.1	137	1.0	.137
1500	4.36	.19	115	35.01	.03	114	1493.2	.0	1.0	114	1.0	.114
1750	4.01	.12	28	35.00	.02	26	1496.3	.6	2.6	26	2.0	.26
2000	3.76	.10	25	34.99	.02	24	1499.2	.6	2.4	24	2.0	.24
2500	3.32	.07	25	34.97	.02	24	1505.8	.4	2.4	24	2.0	.24
3000	2.88	.08	23	34.94	.02	23	1512.6	.4	2.3	23	2.0	.23
4000	2.31	.04	11	34.89	.01	11	1527.5	.3	1.1	11	1.0	.11

Figure E-4. OWS 'ECHO - Summer

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY			
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.
0	21.78	1.82	304	36.24	.18	305	1528.1	4.7
10	21.6	1.82	304	36.25	.17	305	1528.3	4.7
20	21.75	1.83	304	36.26	.16	305	1528.4	4.7
30	21.67	1.76	304	36.28	.14	305	1528.4	4.6
50	21.18	1.53	304	36.32	.12	305	1527.5	4.1
75	19.63	1.05	305	36.38	.13	305	1523.9	3.1
100	18.52	.97	305	36.41	.12	305	1521.3	3.0
125	17.96	.85	305	36.42	.11	305	1520.1	2.7
150	17.58	.78	304	36.41	.11	305	1519.4	2.7
200	17.07	.64	304	36.36	.15	305	1518.6	2.9
250	16.66	.01	301	36.30	.18	304	1518.1	3.5
300	16.24	.18	300	36.23	.21	303	1517.5	4.0
400	15.17	.49	285	36.05	.26	287	1515.6	5.1
500	13.68	.66	284	35.80	.26	284	1512.1	5.9
600	11.81	.76	289	35.53	.23	287	1507.1	6.5
700	9.81	.60	285	35.32	.16	281	1501.5	6.1
800	8.11	.27	284	35.18	.10	276	1496.7	5.1
900	6.84	.62	268	35.12	.06	261	1493.4	3.4
1000	5.89	.58	214	35.09	.06	210	1491.2	2.5
1100	5.27	.45	167	35.06	.05	164	1490.3	1.9
1200	4.87	.33	157	35.04	.05	156	1490.4	1.5
1300	4.59	.27	155	35.03	.05	154	1490.9	1.3
1400	4.35	.21	152	35.02	.05	151	1491.5	1.0
1500	4.20	.15	105	35.01	.05	104	1492.6	.9
1750	3.94	.11	19	35.02	.05	19	1495.8	.5
2000	3.74	.06	16	35.02	.06	16	1499.1	.4
2500	3.29	.06	16	35.01	.07	16	1505.8	.3
3000	2.86	.07	16	34.99	.07	16	1512.5	.4
4000	2.30	.03	5	34.69	.02	5	1527.5	.3

Figure E-5. OWS ECHO - Autumn

**APPENDIX F**

OCEAN WEATHER STATION HOTEL - (38°00'N, 71°00'W)

CH 00-100-00-00 - EDITION 270

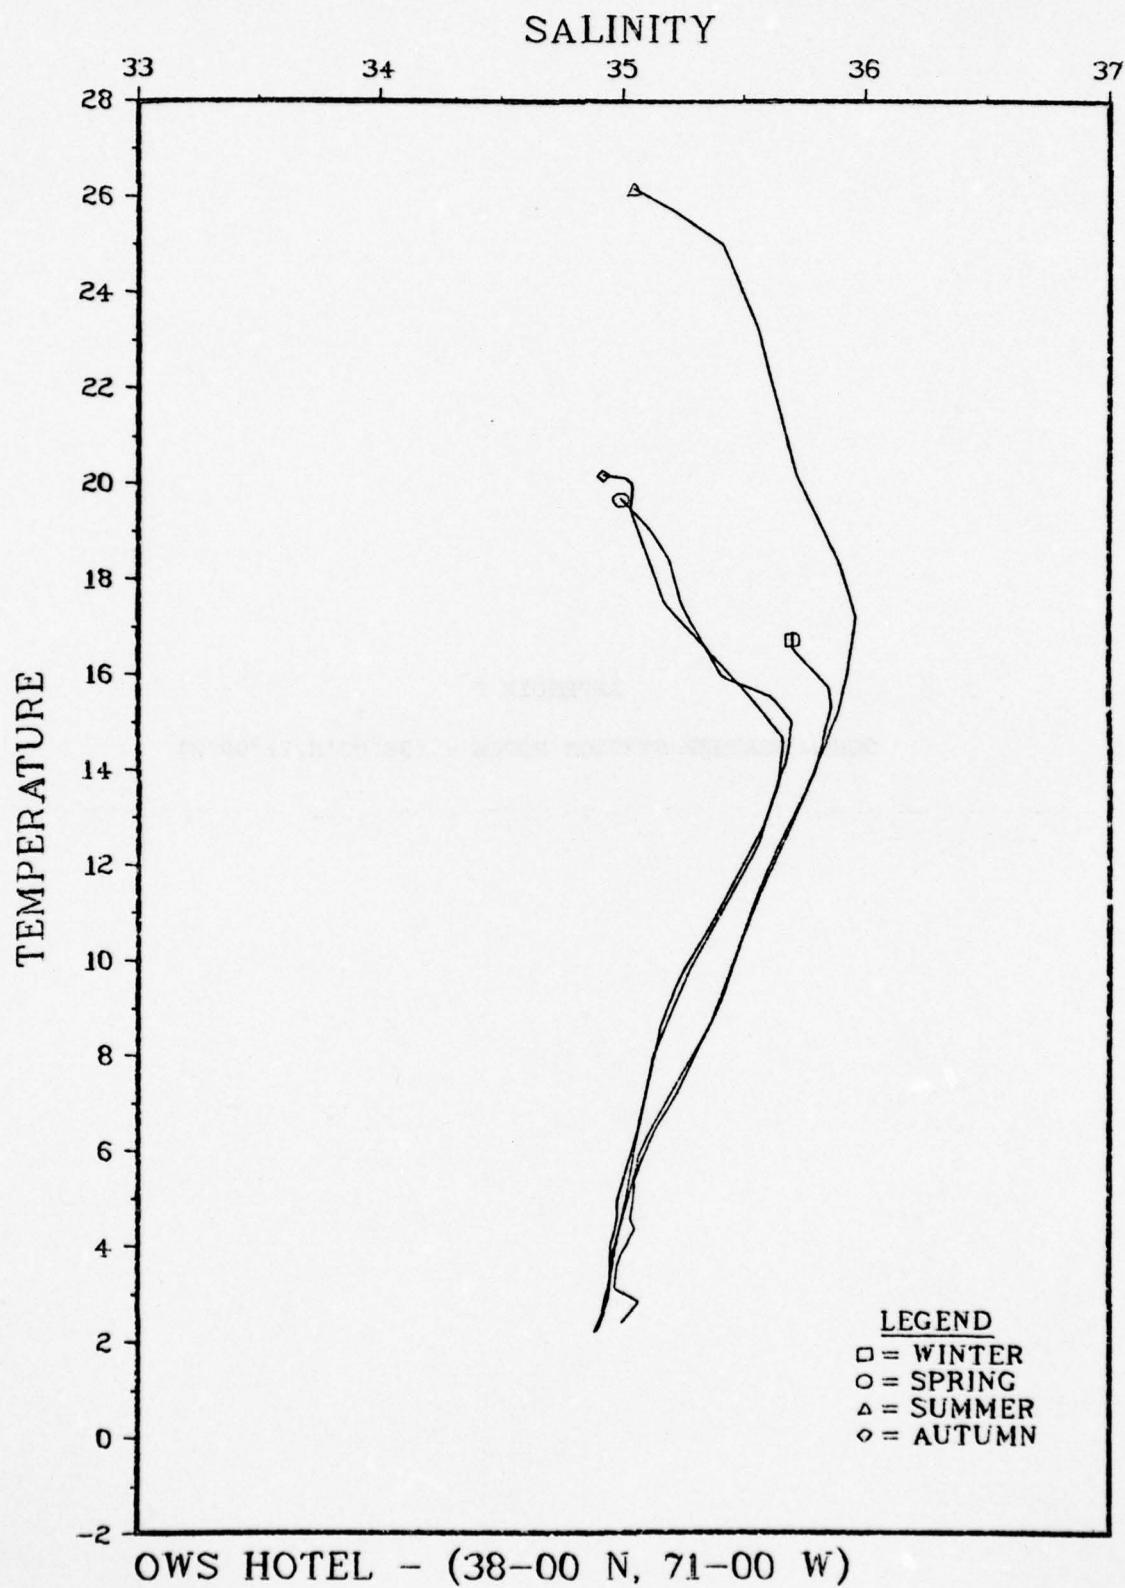


Figure F-1.

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	16.72	4.44	91	35.70	.78	95	1512.6	14.5	91
10	16.92	4.48	94	35.70	.76	95	1513.4	14.5	94
20	16.88	4.43	94	35.70	.73	95	1513.4	14.3	94
30	16.77	4.32	94	35.70	.69	95	1513.3	13.8	94
50	16.53	4.13	94	35.70	.64	95	1513.0	13.1	94
75	16.25	3.87	94	35.75	.59	95	1512.7	12.3	94
100	16.01	3.73	94	35.80	.53	95	1512.5	11.8	94
125	15.71	3.72	94	35.85	.49	95	1512.1	11.8	94
150	15.29	3.80	94	35.86	.49	95	1511.2	12.1	94
200	14.00	4.03	95	35.79	.56	94	1507.8	13.4	94
250	12.83	4.25	93	35.69	.62	94	1504.5	14.6	92
300	11.82	4.49	92	35.60	.65	94	1501.7	15.8	91
400	10.51	5.02	82	35.50	.66	85	1497.9	18.0	81
500	9.31	5.20	79	35.42	.62	78	1494.6	18.7	77
600	8.46	4.87	76	35.34	.51	75	1493.1	17.9	74
700	7.26	3.89	73	35.23	.39	73	1491.2	15.0	73
800	6.53	2.91	64	35.14	.25	62	1489.8	11.5	62
900	5.81	2.03	53	35.08	.16	51	1488.7	8.2	51
1000	5.37	1.34	41	35.05	.12	39	1488.6	5.6	39
1100	4.93	1.90	31	35.04	.11	29	1488.6	3.9	29
1200	4.54	1.61	29	35.03	.09	27	1488.7	2.5	27
1300	4.34	1.46	28	35.05	.14	26	1489.7	2.0	26
1400	4.18	1.36	28	35.03	.16	27	1490.8	1.5	27
1500	4.05	1.28	29	35.02	.14	29	1491.9	1.3	28
1750	3.81	1.22	29	34.99	.09	27	1495.1	1.0	26
2000	3.61	1.21	28	34.98	.09	25	1498.5	1.0	25
2500	3.10	1.24	14	34.97	.05	13	1504.9	1.1	13
3000	2.82	1.19	5	35.07	.10	4	1512.3	1.0	4
4000	2.37	.00	1	34.99	.00	1	1528.0	0.0	0

Figure F-2. OWS HOTEL - Winter

DEPTH	MEAN TEMPERATURE	S.D.	NUM	MEAN SALINITY	S.D.	NUM	MEAN SOUND VELOCITY	S.D.	NUM
0	19.65	5.49	36	34.99	1.10	39	1519.8	17.7	36
10	19.06	5.48	36	35.10	.99	39	1518.4	17.6	36
20	18.37	5.66	37	35.19	.97	39	1516.7	18.2	37
30	17.47	5.83	37	35.24	.92	39	1514.2	18.9	37
50	15.95	5.47	39	35.41	.80	39	1510.3	17.5	39
75	15.54	4.51	39	35.61	.64	39	1510.1	14.3	39
100	14.98	3.75	39	35.70	.50	39	1509.2	11.8	39
125	14.21	3.43	39	35.67	.49	39	1507.2	11.0	39
150	13.46	3.02	39	35.62	.44	39	1505.2	9.9	39
200	12.46	2.93	39	35.56	.42	39	1502.6	10.0	39
250	11.16	2.91	39	35.42	.41	39	1498.6	10.3	39
300	10.03	3.14	38	35.30	.39	39	1495.3	11.3	38
400	8.02	3.09	33	35.13	.28	32	1488.6	10.2	31
500	6.60	2.66	31	35.07	.20	30	1484.6	8.7	29
600	5.75	2.05	29	35.02	.11	27	1483.0	6.5	27
700	5.01	1.19	24	34.98	.03	22	1481.8	3.1	22
800	4.67	0.73	23	34.98	.03	22	1482.9	3.0	22
900	4.41	0.44	23	34.97	.02	22	1483.4	1.8	22
1000	4.21	0.27	22	34.96	.02	22	1484.2	1.2	22
1100	4.09	0.16	20	34.95	.02	20	1485.4	.8	20
1200	3.97	0.12	19	34.95	.02	20	1486.5	.6	19
1300	3.88	0.11	19	34.95	.02	20	1487.8	.6	19
1400	3.81	0.11	18	34.95	.02	19	1489.2	.6	18
1500	3.74	0.11	20	34.95	.02	20	1490.6	.6	19
1750	3.51	0.11	12	34.95	.02	11	1493.8	.5	11
2000	3.37	0.10	11	34.95	.02	9	1497.4	.5	9
2500	2.89	0.09	6	34.94	.02	6	1504.0	.5	6
3000	2.43	0.00	1	34.90	.00	1	1510.6	.0	1
4000	2.19	0.00	1	34.88	.00	1	1527.0	.0	1

Figure F-3. OWS HOTEL - Spring

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN	S.D.	MEAN	S.D.	MEAN	S.D.
0	26.14	1.73	19.8	35.04	.97	200
10	25.71	2.12	19.9	35.20	.80	199
20	24.97	2.92	19.9	35.41	.68	199
30	23.27	3.97	19.9	35.55	.63	199
50	20.24	5.15	19.9	35.71	.60	199
75	18.40	4.93	19.9	35.89	.54	199
100	17.19	4.56	19.9	35.96	.49	199
125	16.14	4.27	19.9	35.93	.51	199
150	15.20	4.12	19.9	35.89	.53	199
200	13.67	4.11	19.9	35.76	.59	197
250	12.52	4.30	19.9	35.65	.62	196
300	11.53	4.53	19.7	35.57	.64	195
400	10.12	4.93	18.8	35.47	.61	183
500	8.75	6.68	187	35.37	.53	182
600	7.57	3.93	185	35.24	.38	183
700	6.58	2.98	178	35.13	.24	175
800	5.90	2.09	146	35.07	.14	146
900	5.13	1.30	128	35.03	.09	129
1000	4.57	.75	112	35.00	.07	111
1100	4.18	.42	90	34.98	.05	90
1200	4.03	.28	87	34.97	.04	85
1300	3.91	.21	83	34.96	.03	81
1400	3.83	.18	76	34.96	.02	76
1500	3.76	.16	77	34.96	.02	77
1750	3.59	.15	66	34.96	.02	66
2000	3.42	.15	63	34.95	.02	63
2500	2.98	.16	48	34.94	.02	48
3000	2.56	.18	32	34.92	.02	32
4000	2.21	.05	15	34.89	.02	15

Figure E-4. OWS HOTEL - Summer

DEPTH	TEMPERATURE		MEAN S.D.	NUM	SALINITY		MEAN S.D.	NUM	SOUND VELOCITY	
	MEAN	S.D.			MEAN	S.D.			MEAN	S.D.
0	20.16	3.23	101	34.92	.75	101	1522.0	9.3	101	101
10	20.10	3.19	101	35.01	.65	101	1522.1	9.1	101	101
20	19.95	3.13	101	35.04	.62	101	1521.9	8.9	101	101
30	19.44	3.05	101	35.03	.60	101	1520.7	8.7	101	101
50	17.49	3.14	101	35.17	.56	101	1515.6	9.5	101	101
75	15.68	2.72	101	35.50	.43	101	1511.0	8.4	101	101
100	14.66	2.31	100	35.66	.35	100	1508.5	7.3	100	100
125	13.71	2.14	100	35.64	.29	100	1505.8	6.9	100	100
150	12.84	2.04	100	35.58	.28	100	1503.3	6.9	100	100
200	11.12	2.02	100	35.40	.28	100	1498.0	7.1	100	100
250	9.76	2.05	100	35.25	.27	100	1493.7	7.3	100	100
300	8.63	2.06	100	35.16	.27	100	1490.2	7.5	100	100
400	6.85	1.99	85	35.08	.23	84	1484.9	7.5	84	84
500	5.70	1.35	83	35.04	.15	83	1482.0	5.2	82	82
600	5.07	1.02	81	35.02	.10	81	1481.2	4.1	80	80
700	4.71	.71	80	35.00	.06	80	1481.3	2.9	79	79
800	4.45	.50	57	34.99	.03	57	1481.9	2.1	56	56
900	4.21	.13	49	34.98	.02	48	1482.6	.6	48	48
1000	4.08	.13	42	34.98	.02	41	1483.7	.7	41	41
1100	3.96	.15	29	34.97	.02	28	1484.9	.8	28	28
1200	3.87	.12	28	34.97	.02	27	1486.2	.7	27	27
1300	3.80	.11	28	34.97	.02	27	1487.5	.6	27	27
1400	3.73	.11	28	34.96	.02	27	1488.9	.6	27	27
1500	3.67	.12	27	34.96	.02	26	1490.3	.7	26	26
1750	3.49	.10	23	34.95	.02	22	1493.8	.5	22	22
2000	3.32	.09	20	34.95	.02	20	1497.3	.5	20	20
2500	2.94	.10	14	34.93	.02	14	1504.2	.6	14	14
3000	2.44	.11	7	34.91	.01	7	1510.7	.5	7	7

Figure E-5. OWS HOTEL - Autumn

APPENDIX G

OCEAN WEATHER STATION INDIA - (60°00'N, 19°30'W)

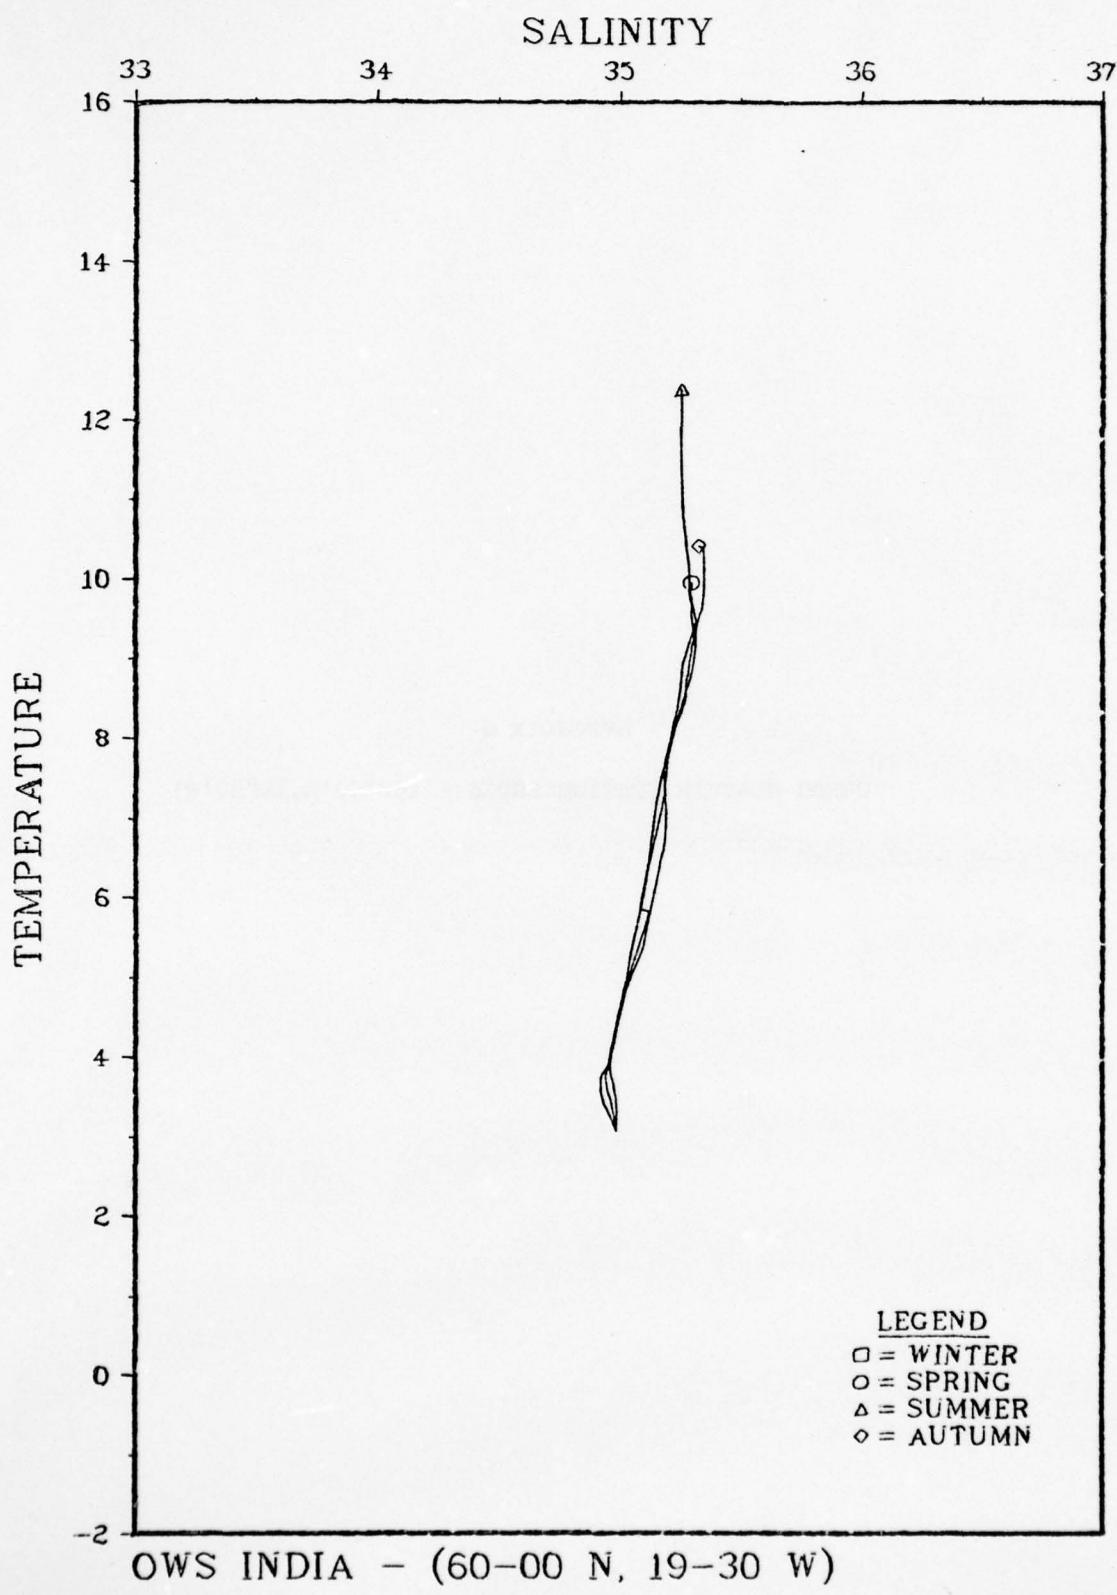


Figure G-1.

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	9.96	.80	18	35.29	.05	18	1490.6	.29	18
10	9.87	.77	18	35.29	.04	18	1490.4	.28	18
20	9.83	.74	18	35.28	.04	18	1490.4	.28	18
30	9.76	.73	18	35.24	.04	18	1490.3	.27	18
50	9.59	.75	18	35.29	.05	18	1490.0	.28	18
75	9.39	.65	18	35.30	.05	18	1489.7	.25	18
100	9.25	.60	18	35.30	.05	18	1489.6	.23	18
125	9.16	.58	18	35.29	.05	18	1489.7	.22	18
150	9.09	.56	18	35.29	.05	18	1489.8	.21	18
200	8.95	.51	18	35.28	.04	18	1490.1	.20	18
250	8.85	.50	18	35.28	.04	18	1490.6	.20	18
300	8.75	.48	18	35.27	.04	18	1491.0	.18	18
400	8.50	.40	15	35.27	.07	15	1491.7	.15	15
500	8.11	.34	12	35.22	.05	12	1491.8	.14	12
600	7.61	.57	9	35.18	.08	10	1491.5	.23	9
700	7.11	.70	8	35.19	.07	9	1491.3	.28	8
800	6.72	.75	7	35.18	.08	8	1491.3	.31	7
900	5.99	.68	7	35.13	.08	8	1490.0	.28	7
1000	5.37	.56	7	35.09	.08	8	1489.1	.24	7
1100	5.02	.67	8	35.04	.06	8	1489.3	.28	8
1200	4.53	.45	8	35.00	.05	8	1488.9	.19	8
1300	4.17	.29	8	34.97	.03	8	1489.1	.13	8
1400	3.92	.18	8	34.96	.03	8	1489.7	.08	8
1500	3.75	.08	8	34.92	.02	4	1490.7	.5	4
1750	3.56	.04	4	34.92	.01	4	1494.0	.2	4
2000	3.44	.04	4	34.93	.01	4	1497.9	.2	4
2500	3.08	.03	3	34.98	.03	3	1505.0	.2	3

Figure G-3. OWS INDIA - Spring

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	12.39	.61	9	35.25	.05	9	1499.1	2.0	9
10	12.04	.47	9	35.25	.05	9	1498.0	1.6	9
20	11.78	.50	9	35.25	.05	9	1497.3	1.7	9
30	11.59	.60	9	35.25	.05	9	1496.8	2.1	9
50	10.81	.15	9	35.26	.06	9	1494.4	.6	9
75	10.24	.21	9	35.28	.06	9	1492.6	.8	9
100	9.87	.25	9	35.28	.06	9	1491.9	1.0	9
125	9.73	.33	9	35.29	.05	9	1491.6	1.3	9
150	9.64	.40	9	35.30	.05	9	1491.9	1.5	9
200	9.48	.40	9	35.31	.06	9	1492.2	1.5	9
250	9.20	.28	9	35.28	.06	9	1491.9	1.0	9
300	8.96	.25	9	35.26	.06	9	1491.8	1.0	9
400	8.63	.30	9	35.25	.05	9	1492.2	1.2	9
500	8.34	.25	9	35.23	.05	9	1492.7	1.0	9
600	7.96	.20	9	35.20	.06	9	1492.9	.8	9
700	7.45	.24	9	35.16	.06	9	1492.6	1.0	9
800	6.53	.24	2	35.12	.02	2	1490.5	1.0	2
900	5.88	.33	2	35.08	.03	2	1489.6	1.4	2
1000	5.33	.33	2	35.04	.04	2	1488.9	1.4	2
1100	4.85	.21	2	35.02	.02	2	1488.6	.9	2
1200	4.47	.11	2	34.99	.01	2	1488.6	.5	2
1300	4.22	.07	2	34.98	.00	2	1489.3	.4	2
1400	4.01	.04	2	34.96	.01	2	1490.1	.2	2
1500	3.83	.02	2	34.96	.02	2	1491.0	.0	2
1750	3.69	.02	2	34.97	.03	2	1494.7	.2	2
2000	3.49	.03	2	34.98	.03	2	1498.1	.2	2
2500	3.03	.00	1	34.98	.00	1	1504.7	0	1

Figure G-4. OWS INDIA - Summer

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN S.O.U.	NUM	MEAN S.O.U.	NUM	MEAN S.O.U.	NUM
0	10.42	1.00	6	35.32	.06	6
10	10.40	.99	6	35.33	.05	6
20	10.40	1.00	6	35.33	.06	6
30	10.39	1.00	6	35.33	.05	6
50	10.38	1.02	6	35.34	.05	6
75	10.19	.91	6	35.34	.04	6
100	10.10	.88	6	35.34	.03	6
125	10.01	.82	6	35.34	.04	6
150	9.92	.75	6	35.34	.04	6
200	9.64	.55	6	35.33	.03	6
250	9.40	.47	6	35.31	.03	6
300	9.18	.47	6	35.31	.04	5
400	8.81	.41	6	35.29	.04	5
500	8.34	.19	5	35.24	.02	3
600	7.81	.12	4	35.20	.04	3
700	7.23	.12	3	35.18	.05	2
800	6.74	.21	3	35.14	.07	2
900	6.31	.27	3	35.11	.07	2
1000	5.85	.30	2	35.08	.06	2
1100	5.83	.00	1	35.12	.00	1

Figure G-5. OWS INDIA - Autumn

APPENDIX H

OCEAN WEATHER STATION JULIETT - (53°18'N, 19°18'W)

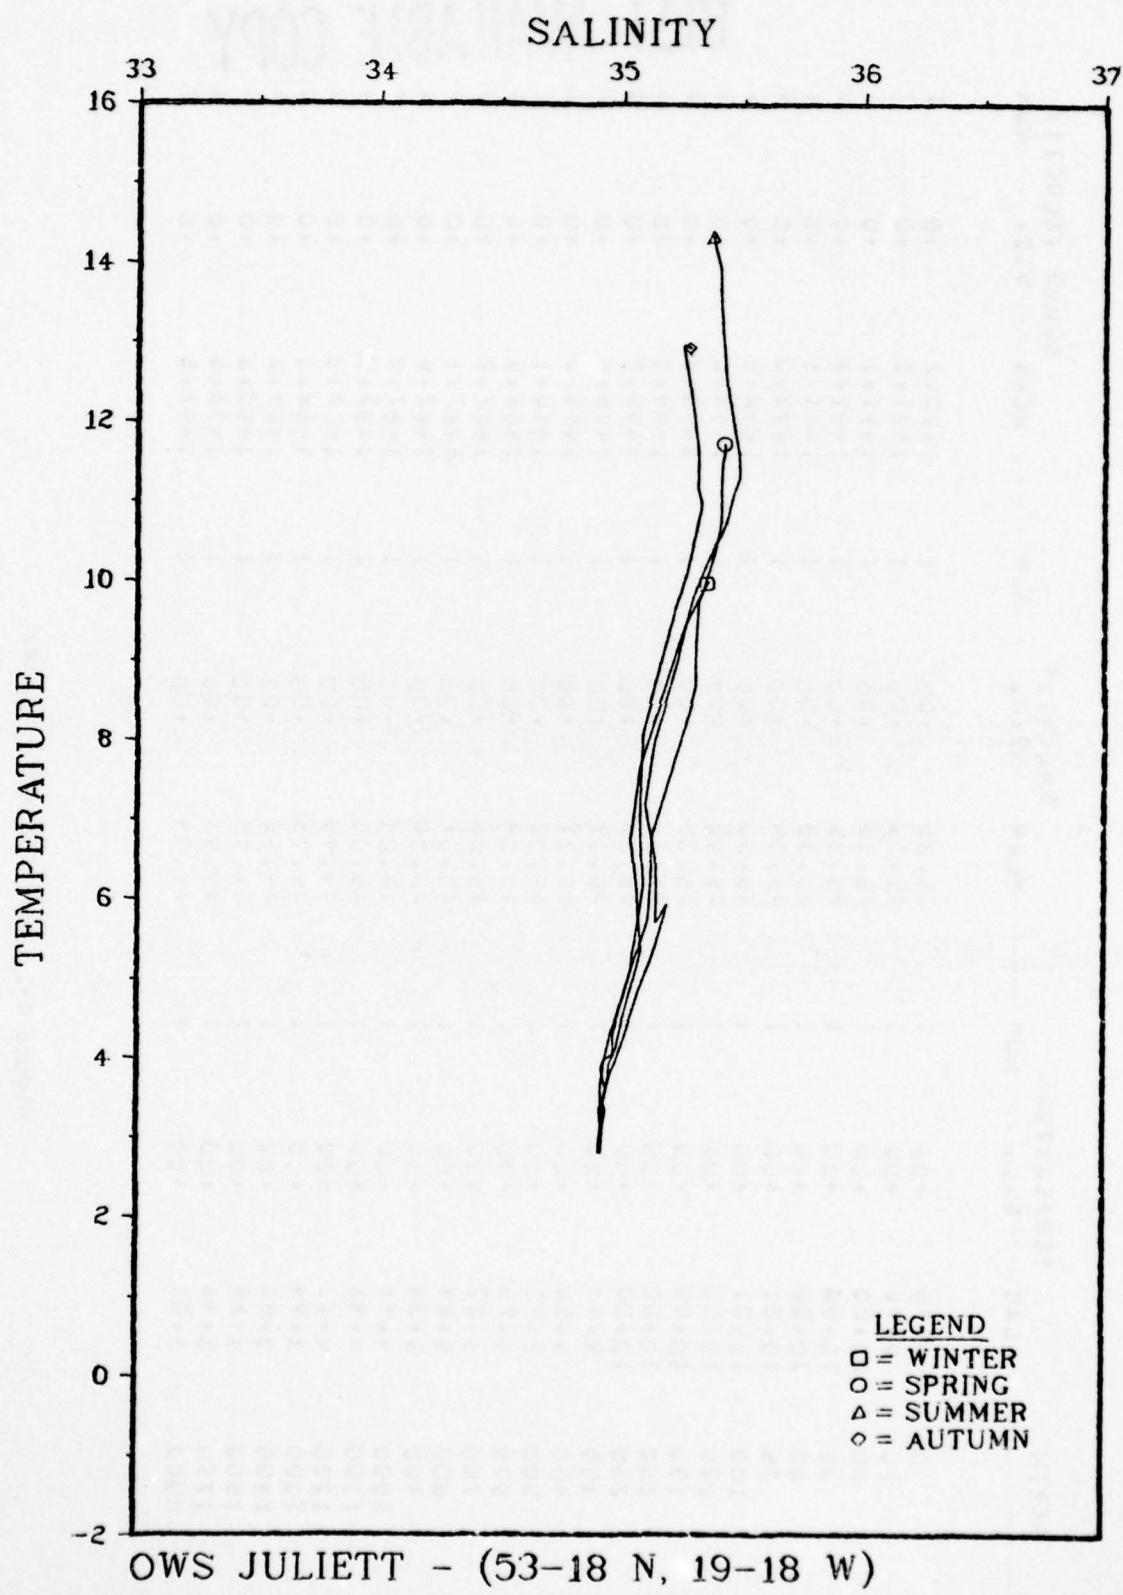


Figure H-1.

BEST AVAILABLE COPY

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	9.98	.00	1	35.35	.00	1	1490.7	.0	1
10	9.98	.00	1	35.35	.00	1	1491.0	.0	1
20	10.00	.00	1	35.35	.00	1	1491.1	.0	1
30	10.00	.00	1	35.35	.00	1	1491.3	.0	1
50	10.00	.00	1	35.35	.00	1	1491.6	.0	1
75	10.01	.00	1	35.35	.00	1	1492.0	.0	1
100	10.01	.00	1	35.35	.00	1	1492.5	.0	1
125	10.02	.00	1	35.35	.00	1	1493.0	.0	1
150	10.02	.00	1	35.36	.00	1	1493.3	.0	1
200	10.00	.00	1	35.36	.00	1	1494.1	.0	1
250	10.00	.00	1	35.35	.00	1	1495.0	.0	1
300	9.98	.00	1	35.35	.00	1	1495.6	.0	1
400	9.50	.00	1	35.27	.00	1	1495.5	.0	1
500	7.71	.00	1	35.08	.00	1	1490.1	.0	1
600	6.75	.00	1	35.04	.00	1	1488.0	.0	1
700	6.27	.00	1	35.06	.00	1	1487.7	.0	1
800	5.69	.00	1	35.07	.00	1	1487.4	.0	1
900	5.38	.00	1	35.08	.00	1	1487.5	.0	1
1000	4.91	.00	1	35.04	.00	1	1487.2	.0	1
1100	4.46	.00	1	35.00	.00	1	1487.0	.0	1
1200	4.13	.00	1	34.98	.00	1	1487.2	.0	1
1300	3.94	.00	1	34.95	.00	1	1486.1	.0	1
1400	3.80	.00	1	34.95	.00	1	1489.2	.0	1
1500	3.69	.00	1	34.94	.00	1	1490.5	.0	1
1750	3.46	.00	1	34.93	.00	1	1493.6	.0	1
2000	3.35	.00	1	34.94	.00	1	1497.6	.0	1

Figure H-2. OWS JULIETT - Winter

BEST AVAILABLE COPY

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	11.74	.87	51	35.42	.10	52	1497.0	.14	51
10	11.62	.85	51	35.42	.10	52	1496.8	.10	51
20	11.50	.80	51	35.41	.10	52	1496.5	.09	51
30	11.39	.75	51	35.41	.10	52	1496.3	.07	51
50	11.19	.70	51	35.41	.11	52	1495.9	.06	51
75	10.99	.66	51	35.41	.11	52	1495.6	.06	51
100	10.82	.68	51	35.41	.11	52	1495.4	.06	51
125	10.66	.68	51	35.40	.11	52	1495.3	.06	51
150	10.51	.69	52	35.39	.11	52	1495.1	.07	52
200	10.31	.74	52	35.36	.12	52	1495.2	.08	52
250	10.09	.83	49	35.33	.12	52	1495.2	.02	49
300	9.84	.92	48	35.30	.13	52	1495.0	.06	48
400	9.08	1.12	42	35.24	.13	46	1493.7	.14	42
500	8.04	1.13	35	35.14	.11	36	1491.4	.05	35
600	7.19	1.02	33	35.10	.10	33	1489.7	.00	33
700	6.54	1.26	17	35.14	.10	16	1489.1	.01	16
800	5.96	1.26	15	35.14	.10	14	1488.5	.01	14
900	5.69	1.27	12	35.14	.12	12	1488.6	.02	12
1000	5.07	1.05	6	35.19	.11	5	1492.2	.05	5
1100	5.33	.92	6	35.13	.10	5	1491.3	.09	5
1200	4.93	.78	5	35.08	.08	5	1490.7	.03	5
1300	4.43	.54	5	35.03	.05	5	1490.2	.03	5
1400	4.07	.38	5	34.99	.03	5	1490.4	.06	5
1500	3.86	.26	5	34.96	.00	2	1490.6	.12	2
1750	3.57	.12	2	34.94	.02	2	1494.1	.05	2
2000	3.36	.10	2	34.91	.00	1	1498.0	.00	1
2500	3.19	.00	1	34.92	.00	1	1505.3	.00	1
3000	2.81	.00	1	34.91	.00	1	1512.3	.00	1

Figure H-3. OWS JULIETT - Spring

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.O.D.	NUM	MEAN SALINITY S.O.D.	NUM	MEAN SOUND VELOCITY S.O.D.	NUM
0	14.34	69	13.1	35.37	2.8	131
10	14.19	65	13.1	35.38	1.6	131
20	13.95	70	13.1	35.40	0.9	131
30	13.65	76	13.1	35.40	0.9	131
50	12.53	77	13.1	35.43	1.0	131
75	11.62	52	13.1	35.48	0.9	131
100	11.29	50	13.1	35.48	0.9	131
125	11.13	47	13.1	35.46	0.8	131
150	10.98	46	13.1	35.45	0.8	131
200	10.75	44	13.0	35.43	0.8	131
250	10.55	45	13.0	35.40	0.9	131
300	10.33	50	13.0	35.38	0.9	131
400	9.76	74	11.8	35.32	1.3	119
500	9.23	94	7.9	35.31	1.4	79
600	8.71	100	5.1	35.31	1.2	51
700	6.85	82	1.3	35.13	0.8	13
800	6.26	73	1.3	35.12	0.8	13
900	5.77	70	1.3	35.11	0.8	13
1000	5.23	58	1.1	35.05	0.5	11
1100	4.68	40	1.1	35.00	0.3	11
1200	4.31	29	9	34.97	0.3	9
1300	4.06	23	9	34.97	0.7	9
1400	3.98	14	6	34.93	0.1	6
1500	3.87	08	4	34.92	0.1	4
1750	3.62	04	3	34.94	0.2	3
2000	3.47	06	2	34.93	0.1	2
2500	3.12	00	1	34.90	0.0	1

Figure H-4. OWS JULIETT - Summer

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.D.	TEMPERATURE NUM	MEAN SALINITY S.D.	SALINITY NUM	MEAN SOUND VELOCITY S.D.	MEAN NUM
0	12.94	1.15	6	35.28	.09	6
10	12.99	1.21	6	35.25	.09	6
20	12.98	1.21	6	35.25	.09	6
30	12.94	1.16	6	35.25	.09	6
50	12.62	.93	6	35.27	.06	6
75	11.70	.50	6	35.31	.08	6
100	11.21	.44	6	35.31	.06	6
125	10.98	.56	6	35.33	.06	6
150	10.71	.68	6	35.31	.05	6
200	10.18	.53	6	35.27	.03	6
250	9.67	.40	6	35.22	.04	6
300	9.19	.50	6	35.18	.06	6
400	8.12	.61	6	35.09	.09	6
500	7.37	.50	3	35.08	.03	3
600	6.89	.55	3	35.08	.01	3
700	6.20	.14	2	35.09	.03	2
800	5.63	.11	2	35.06	.01	2
900	5.13	.12	2	35.04	.02	2
1000	4.73	.08	2	35.00	.00	2
1100	4.36	.04	2	34.96	.00	2
1200	4.09	.03	2	34.94	.00	2
1300	3.85	.10	2	34.93	.00	2
1400	3.73	.09	2	34.92	.00	2
1500	3.67	.08	2	34.92	.00	2
1750	3.39	.00	1	34.92	.00	1
2000	3.11	.00	1	.00	.00	0

Figure H-5. CWS JULIETT - Autumn

APPENDIX I

OCEAN WEATHER STATION KILO - (45°00'N, 16°00'W)

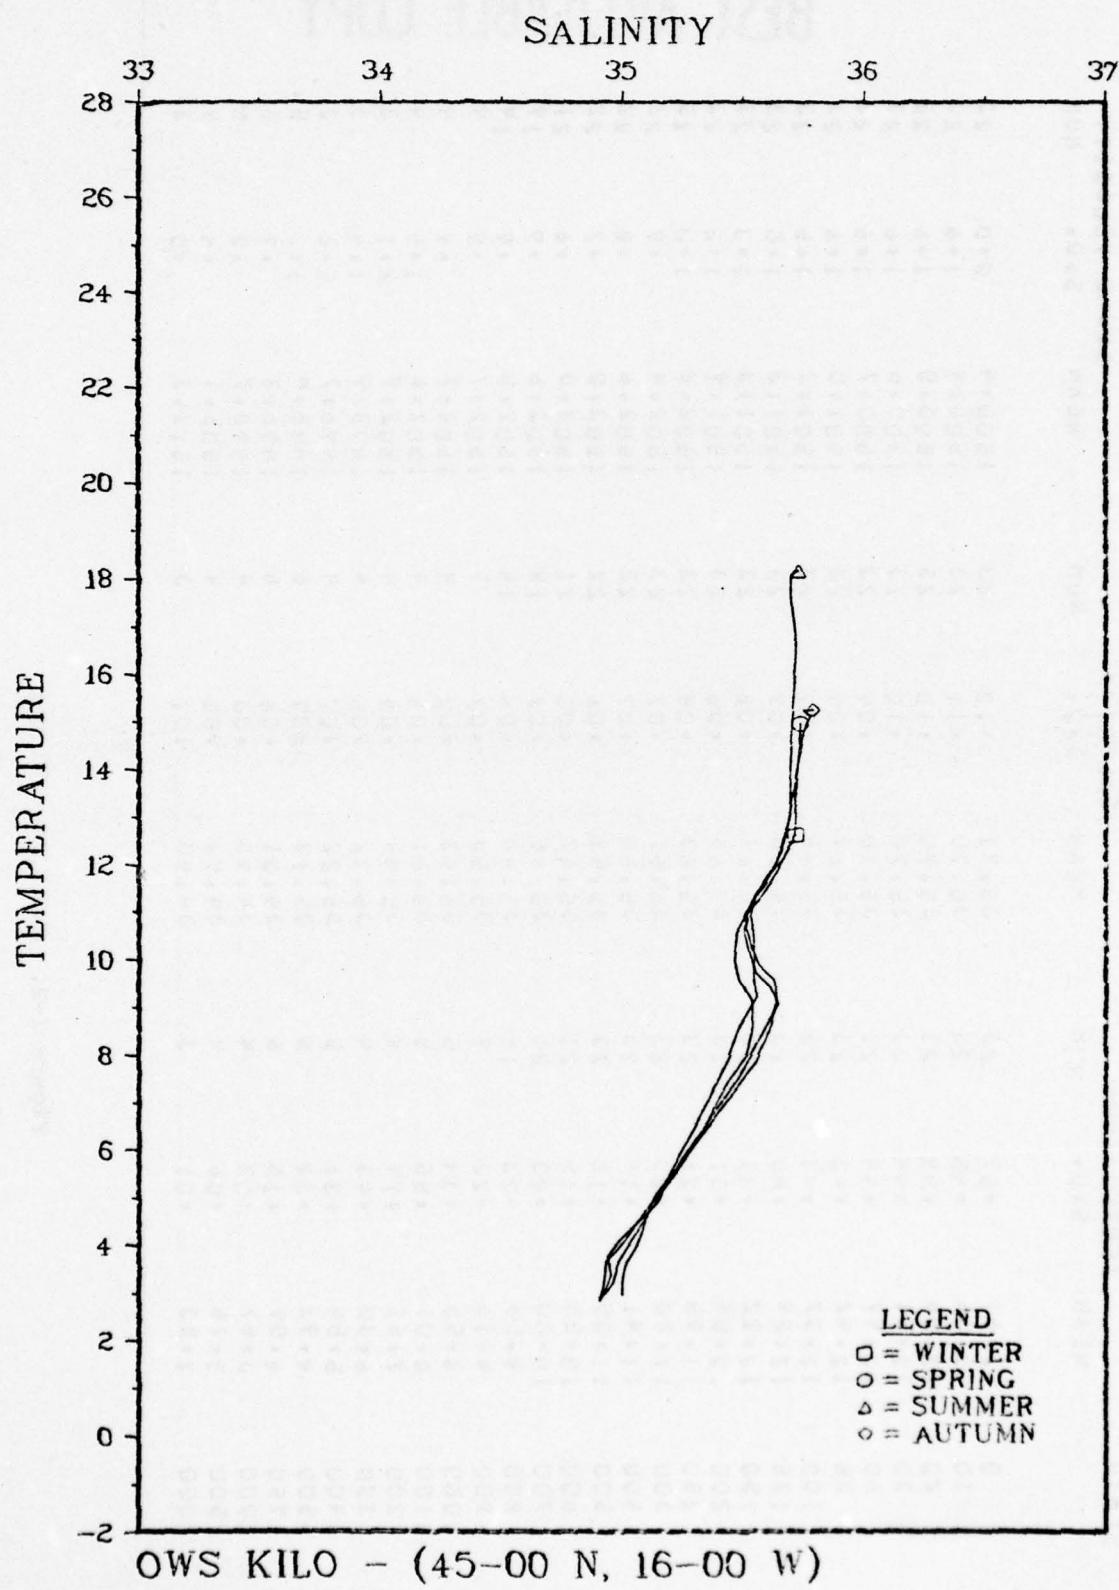


Figure I-1.

# BEST AVAILABLE COPY

DEPTH	MEAN	TEMPERATURE	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	12.61	*57	23	35.71	.12	23	1500.4	.0	23	1500.4	.0	23	1500.4	.0	23
10	12.56	*45	23	35.70	.11	23	1500.5	.0	23	1500.5	.0	23	1500.5	.0	23
20	12.55	*44	23	35.70	.10	23	1500.5	.0	23	1500.5	.0	23	1500.5	.0	23
30	12.51	*44	23	35.70	.10	23	1500.5	.0	23	1500.5	.0	23	1500.5	.0	23
50	12.47	*44	23	35.70	.09	23	1500.7	.0	23	1500.7	.0	23	1500.7	.0	23
75	12.42	*43	23	35.69	.09	23	1501.0	.0	23	1501.0	.0	23	1501.0	.0	23
100	12.37	*43	23	35.68	.09	23	1501.2	.0	23	1501.2	.0	23	1501.2	.0	23
125	12.29	*40	23	35.68	.09	23	1501.3	.0	23	1501.3	.0	23	1501.3	.0	23
150	12.22	*35	23	35.67	.08	23	1501.5	.0	23	1501.5	.0	23	1501.5	.0	23
200	12.09	*31	23	35.66	.08	23	1501.9	.0	23	1501.9	.0	23	1501.9	.0	23
250	11.95	*26	23	35.63	.08	23	1502.2	.0	23	1502.2	.0	23	1502.2	.0	23
300	11.80	*23	23	35.61	.07	23	1502.4	.0	23	1502.4	.0	23	1502.4	.0	23
400	11.41	*19	23	35.56	.07	22	1502.6	.0	22	1502.6	.0	22	1502.6	.0	22
500	11.05	*18	23	35.52	.06	22	1503.0	.0	22	1503.0	.0	22	1503.0	.0	22
600	10.55	*15	21	35.47	.05	21	1502.8	.0	21	1502.8	.0	21	1502.8	.0	21
700	10.00	*23	20	35.46	.07	19	1502.5	.0	19	1502.5	.0	19	1502.5	.0	19
800	9.56	*23	14	35.48	.06	14	1502.5	.0	14	1502.5	.0	14	1502.5	.0	14
900	9.15	*22	19	35.53	.07	19	1502.7	.0	19	1502.7	.0	19	1502.7	.0	19
1000	8.55	*34	5	35.53	.02	4	1502.7	.0	4	1502.7	.0	4	1502.7	.0	4
1100	8.01	*55	5	35.51	.04	4	1502.6	.0	4	1502.6	.0	4	1502.6	.0	4
1200	7.51	*79	4	35.44	.04	4	1502.9	.0	4	1502.9	.0	4	1502.9	.0	4
1300	6.30	*43	4	35.32	.05	4	1498.9	.0	4	1498.9	.0	4	1498.9	.0	4
1400	5.54	*36	5	35.22	.07	4	1496.7	.0	4	1496.7	.0	4	1496.7	.0	4
1500	4.92	*32	6	35.12	.07	6	1495.4	.0	6	1495.4	.0	6	1495.4	.0	6
1750	4.09	*15	6	35.01	.06	6	1496.3	.0	6	1496.3	.0	6	1496.3	.0	6
2000	3.67	*03	4	34.93	.03	4	1498.7	.0	4	1498.7	.0	4	1498.7	.0	4
2500	3.16	*06	4	34.92	.03	4	1505.1	.0	4	1505.1	.0	4	1505.1	.0	4
3000	2.83	*01	3	34.90	.02	3	1512.3	.0	3	1512.3	.0	3	1512.3	.0	3

Figure I-2. OWS KILO - Winter

BEST AVAILABLE COPY

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	14.95	1.45	29	35.73	.10	29	1508.0	4.7	29
10	14.72	1.34	29	35.73	.08	29	1507.4	4.4	29
20	14.43	1.18	29	35.72	.08	29	1506.7	3.9	29
30	14.14	1.07	29	35.72	.07	29	1505.9	3.5	29
50	13.37	.76	29	35.71	.07	29	1503.8	2.6	29
75	12.80	.54	29	35.71	.07	29	1502.3	1.9	29
100	12.53	.44	29	35.70	.06	29	1501.7	1.6	29
125	12.36	.42	29	35.68	.05	29	1501.6	1.6	29
150	12.21	.41	29	35.67	.05	29	1501.5	1.5	29
200	12.00	.37	29	35.65	.06	29	1501.5	1.4	29
250	11.83	.33	29	35.63	.05	27	1501.8	1.2	27
300	11.65	.29	29	35.61	.05	27	1502.0	1.1	27
400	11.27	.24	29	35.56	.05	25	1502.3	1.0	25
500	10.94	.31	18	35.51	.05	16	1502.6	1.2	16
600	10.56	.39	15	35.50	.06	15	1502.9	1.5	15
700	10.17	.50	15	35.52	.06	14	1503.1	1.9	14
800	9.72	.67	12	35.55	.08	12	1503.2	2.5	12
900	9.44	.40	8	35.61	.07	10	1503.9	1.6	8
1000	9.07	.50	8	35.64	.08	10	1504.2	1.9	8
1100	8.40	.58	6	35.57	.11	6	1503.3	2.3	6
1200	7.57	.68	6	35.48	.14	6	1501.7	2.8	6
1300	6.69	.60	6	35.36	.11	6	1499.6	2.5	6
1400	5.85	.43	6	35.25	.08	6	1498.0	1.9	6
1500	5.04	.31	6	35.13	.07	6	1496.3	1.4	6
1750	4.12	.17	5	35.07	.08	4	1496.7	1.0	4
2000	3.60	.07	5	35.01	.08	4	1498.5	.3	4
2500	3.24	.05	3	35.00	.00	3	1505.5	.3	3
3000	2.94	.00	2	35.00	.00	2	1513.0	.0	2

Figure I-3. OWS KILO - Spring

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.D.	NUM	MEAN SALINITY S.O.U.	NUM	MEAN SOUND VELOCITY S.D.	NUM
0	18.15	94	35.72	10	25	25
10	18.05	91	35.69	11	25	1517.7
20	17.71	97	35.69	11	25	1517.5
30	16.79	1019	35.71	10	25	1516.7
50	14.50	1017	35.69	11	25	1514.2
75	13.20	68	35.69	10	25	1507.4
100	12.63	48	35.67	10	25	1503.6
125	12.42	38	35.66	10	25	1501.9
150	12.24	34	35.65	10	25	1501.5
200	12.00	29	35.63	09	25	1501.5
250	11.80	26	35.60	08	25	1501.6
300	11.64	23	35.58	07	24	1501.9
400	11.42	20	35.54	07	22	1502.2
500	10.98	23	35.52	06	19	1502.8
600	10.63	24	35.51	08	15	1503.1
700	10.27	30	35.53	10	15	1503.6
800	9.90	42	35.56	12	13	1503.9
900	9.57	51	35.63	13	13	1504.4
1000	9.14	57	35.63	13	12	1504.3
1100	8.57	64	35.61	17	11	1503.7
1200	7.87	69	35.55	18	11	1502.8
1300	6.90	57	35.41	14	11	1500.6
1400	5.93	48	35.27	11	12	1498.3
1500	5.23	43	35.18	09	11	1497.1
1750	4.03	20	35.03	05	6	1496.3
2000	3.59	11	34.98	04	3	1496.4
2500	3.20	03	34.96	00	1	1505.5
3000	2.88	00	0.00	0	0	1505.0

Figure I-4. OWS KILO - Summer

BEST AVAILABLE COPY

DEPTH	MEAN S.D.	TEMPERATURE NUM	MEAN S.D.	SALINITY NUM	MEAN S.D.	SOUND VELOCITY NUM	MEAN S.D.	NUM	MEAN S.D.	VELOCITY NUM
0	15.23	1.17	1	35.78	.09	1509.0	.37	1	1509.0	4.0
10	15.23	1.25	1	35.74	.06	1509.0	.40	1	1509.0	4.0
20	15.17	1.23	1	35.75	.06	1509.1	.39	1	1509.1	3.9
30	15.09	1.17	1	35.77	.10	1509.0	.37	1	1509.0	3.7
50	14.90	1.14	1	35.75	.07	1508.7	.36	1	1508.7	3.6
75	14.11	.69	1	35.72	.06	1506.6	.22	1	1506.6	2.2
100	13.41	.86	1	35.70	.08	1504.7	.28	1	1504.7	2.8
125	12.75	.30	1	35.67	.06	1502.9	.11	1	1502.9	1.1
150	12.33	.23	1	35.65	.07	1501.9	.09	1	1501.9	.09
200	12.05	.26	1	35.63	.06	1501.7	.10	1	1501.7	.10
250	11.83	.19	1	35.61	.05	1501.7	.08	1	1501.7	.08
300	11.61	.16	1	35.59	.04	1501.7	.06	1	1501.7	.06
400	11.32	.20	1	35.55	.05	1502.3	.07	10	1502.3	.07
500	10.90	.31	1	35.53	.09	1502.9	.12	9	1502.9	.12
600	10.46	.38	1	35.54	.11	1502.6	.14	9	1502.6	.14
700	10.04	.37	8	35.54	.11	1502.7	.14	6	1502.7	.14
800	9.72	.38	7	35.54	.11	1503.3	.15	7	1503.3	.15
900	9.21	.42	7	35.55	.11	1503.0	.17	7	1503.0	.17
1000	8.61	.32	4	35.48	.06	1502.4	.13	4	1502.4	.13
1100	7.98	.45	4	35.44	.09	1501.6	.18	4	1501.6	.18
1200	7.45	.62	4	35.39	.13	1501.2	.26	4	1501.2	.26
1300	6.43	.53	5	35.29	.13	1496.7	.23	5	1496.7	.23
1400	5.68	.40	6	35.21	.14	1497.3	.18	6	1497.3	.18
1500	4.93	.30	6	35.15	.15	1495.9	.15	7	1495.9	.15
1750	4.22	.28	6	35.01	.04	1496.6	.11	6	1496.6	.11
2000	3.78	.16	5	34.94	.04	1499.4	.09	3	1499.4	.09
2500	3.39	.07	2	34.95	.02	1506.2	.23	2	1506.2	.23
3000	3.00	.11	2	34.92	.02	1513.1	.04	2	1513.1	.04
4000	2.60	.00	1	34.90	.00	1528.9	.00		1528.9	.00

Figure I-5. OWS KILO - Autumn

**APPENDIX J**

**OCEAN WEATHER STATION MIKE - (66°00'N, 02°00'E)**

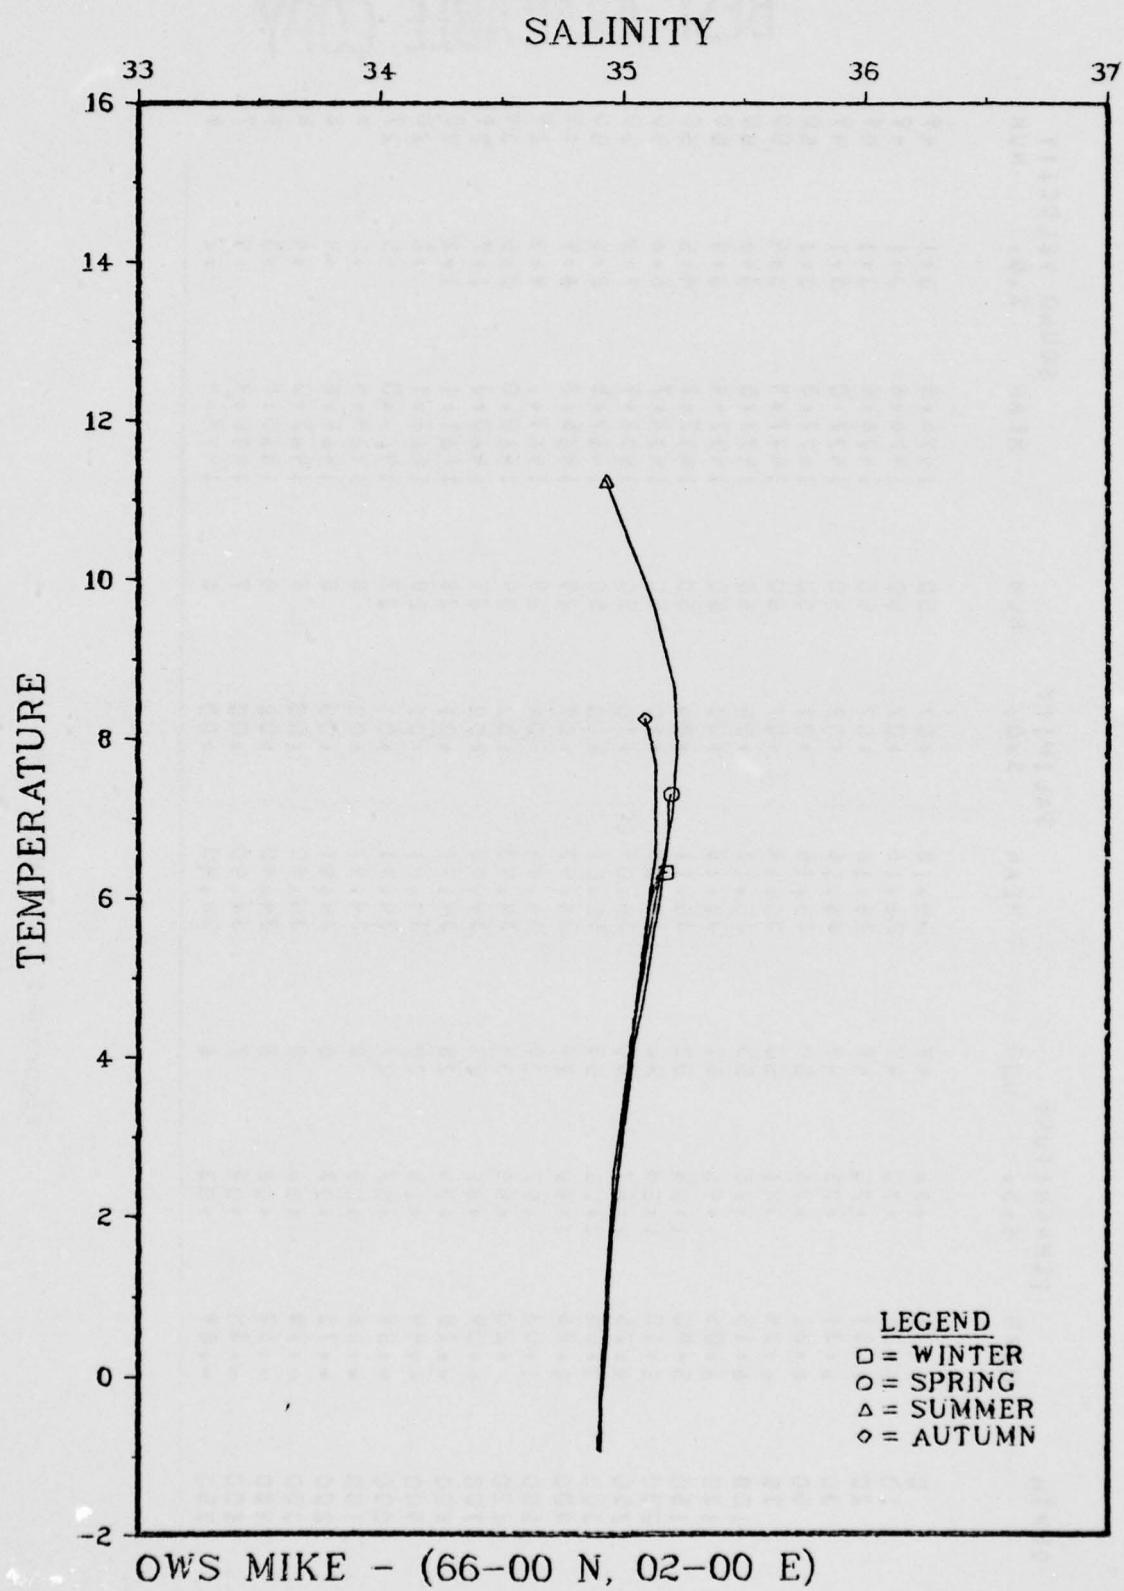


Figure J-1.

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE	S.D. NUM	MEAN SALINITY	S.D. NUM	MEAN SOUND VELOCITY	S.D. NUM
0	6.32	.76	35.18	.07	1476.5	.1
10	6.31	.75	35.16	.07	1476.6	.1
20	6.31	.75	35.16	.07	1476.8	.1
30	6.31	.75	35.16	.07	1477.0	.1
50	6.31	.76	35.15	.07	1477.3	.1
75	6.24	.81	35.14	.07	1477.4	.1
100	6.15	.86	35.13	.08	1477.5	.1
125	6.05	.95	35.12	.08	1477.4	.1
150	5.90	1.08	35.11	.09	1477.2	.1
200	5.10	1.58	35.08	.10	1474.7	.1
250	4.25	1.87	35.04	.10	1471.9	.1
300	3.50	2.03	35.01	.10	1469.5	.1
400	2.26	1.58	34.97	.07	1465.8	.1
500	1.03	1.97	34.94	.04	1462.1	.1
600	.20	1.54	34.93	.02	1460.0	.1
700	.09	1.35	34.92	.02	1460.3	.1
800	.28	1.24	34.91	.01	1461.1	.1
900	.44	1.15	34.91	.01	1462.1	.1
1000	.59	.07	34.91	.01	1463.0	.1
1100	.60	.08	34.91	.00	1464.4	.1
1200	.73	.07	34.91	.00	1465.8	.1
1300	.78	.06	34.90	.00	1467.3	.1
1400	.82	.06	34.90	.00	1468.8	.1
1500	.84	.04	34.90	.00	1470.4	.1
1750	.89	.03	34.90	.00	1474.4	.1

Figure J-2. OWS MIKE - Winter

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.D.	NUM	MEAN SALINITY S.D.	NUM	SOUND VELOCITY S.D.	NUM
0	7.31	1.09	61	35.020	.07	61
10	7.20	1.04	61	35.019	.06	61
20	7.07	.97	61	35.019	.06	61
30	6.91	.88	61	35.019	.06	61
50	6.60	.76	61	35.018	.06	61
75	6.23	.88	61	35.016	.07	60
100	5.93	1.07	61	35.015	.09	60
125	5.66	1.20	61	35.013	.10	60
150	5.40	1.34	61	35.012	.10	60
200	4.82	1.59	61	35.009	.11	60
250	4.24	1.79	61	35.005	.11	60
300	3.65	1.92	61	35.003	.11	61
400	2.74	1.83	33	34.99	.09	33
500	1.96	1.29	28	34.95	.07	28
600	1.29	.63	54	34.92	.03	54
700	-.05	.35	54	34.92	.02	54
800	-.31	.19	54	34.91	.02	54
900	-.47	.12	54	34.91	.02	54
1000	-.61	.09	51	34.91	.02	51
1100	-.70	.06	22	34.91	.01	21
1200	-.77	.06	22	34.91	.01	21
1300	-.81	.07	22	34.91	.01	20
1400	-.85	.06	22	34.91	.01	20
1500	-.87	.05	21	34.91	.01	19
1750	-.91	.03	19	34.90	.01	17
2000	-.94	.02	9	34.91	.01	9
2500	-.95	.01	3	34.90	.01	3
3000	-.89	.01	2	34.89	.01	2

Figure J-3. OWS MIKE - Spring

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.D.	TEMPERATURE NUM	MEAN SALINITY S.D.	SALINITY NUM	MEAN SOUND VELOCITY S.D.	SOUND VELOCITY NUM
0	11.23	978	123	34.93	025	123
10	10.83	973	123	34.98	019	123
20	10.30	975	123	35.05	014	123
30	9.72	970	123	35.12	010	123
50	8.63	970	123	35.21	008	123
75	7.91	976	123	35.22	008	123
100	7.42	988	123	35.21	008	123
125	7.06	1002	123	35.20	008	123
150	6.71	1015	123	35.18	009	123
200	6.11	1042	122	35.14	010	122
250	5.41	1070	121	35.10	011	122
300	4.68	1083	121	35.06	011	122
400	2.66	1052	84	34.97	007	86
500	1.39	1003	67	34.94	005	67
600	.61	964	87	34.93	004	87
700	.23	943	68	34.92	003	68
800	-.11	929	65	34.91	002	65
900	-.35	918	61	34.91	002	61
1000	-.56	909	57	34.91	002	57
1100	-.70	908	25	34.91	001	25
1200	-.77	906	25	34.91	001	25
1300	-.80	906	19	34.91	001	19
1400	-.84	905	19	34.91	001	19
1500	-.87	904	16	34.91	001	16
1750	-.94	903	14	34.91	000	14
2000	-.97	903	7	34.91	000	7
2500	-.100	900	3	34.91	001	3

Figure J-4. OWS MIKE - Summer

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.D.	NUM	MEAN SALINITY S.D.	NUM	MEAN SOUND VELOCITY S.D.	NUM
0	8.25	1.22	6.4	35.09	.07	6.4
10	8.22	1.19	6.4	35.09	.06	6.4
20	8.20	1.18	6.4	35.09	.06	6.4
30	8.17	1.16	6.4	35.10	.06	6.4
50	8.03	1.00	6.4	35.11	.08	6.4
75	7.70	.75	6.4	35.13	.09	6.4
100	7.28	.83	6.4	35.13	.10	6.4
125	6.93	1.03	6.4	35.13	.10	6.3
150	6.58	1.26	6.4	35.13	.11	6.3
200	5.63	1.55	6.3	35.09	.11	6.3
250	4.64	1.72	6.3	35.05	.11	6.3
300	3.70	1.74	6.3	35.02	.10	6.3
400	1.95	1.16	4.2	34.96	.05	4.2
500	0.82	.64	3.0	34.94	.03	2.9
600	0.25	.43	4.4	34.92	.03	4.4
700	-0.01	.27	3.4	34.92	.02	3.4
800	-0.22	.19	3.2	34.91	.02	3.2
900	-0.39	.13	3.2	34.91	.02	3.2
1000	-0.55	.08	2.8	34.91	.01	2.8
1100	-0.65	.05	1.2	34.90	.01	1.2
1200	-0.72	.04	1.1	34.91	.00	1.1
1300	-0.76	.05	1.1	34.91	.01	1.1
1400	-0.80	.07	1.1	34.91	.00	1.1
1500	-0.81	.08	1.1	34.91	.00	1.1
1750	-0.87	.06	1.0	34.91	.01	1.0
2000	-0.91	.03	4	34.90	.01	4

Figure J-5. OWS MIKE - Autumn

**APPENDIX K**

**OCEAN WEATHER STATION PAPA - (50°00'N, 145°00'W)**

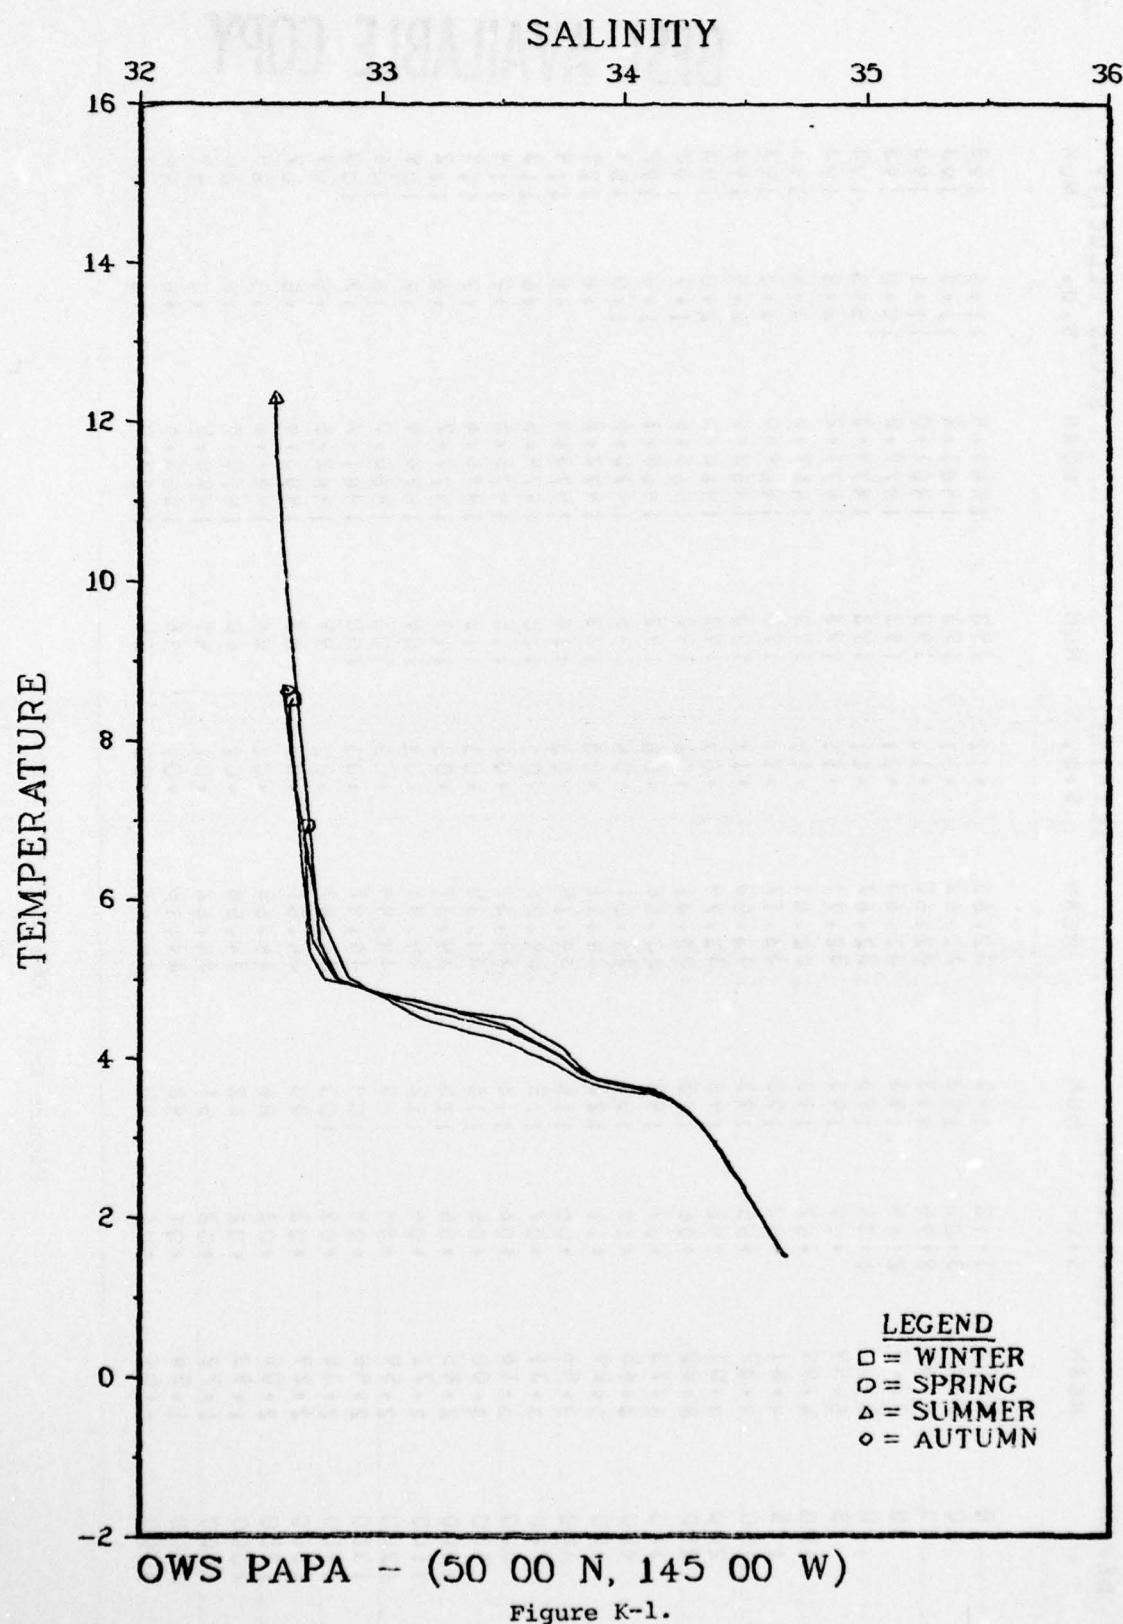


Figure K-1.

# BEST AVAILABLE COPY

DEPTH	TEMPERATURE			SALINITY			SOUND VELOCITY		
	MEAN	S.D.	NUM	MEAN	S.D.	NUM	MEAN	S.D.	NUM
0	8.52	3.10	193	32.63	.12	193	1481.4	11.6	193
10	8.44	3.03	193	32.62	.11	193	1481.2	11.3	193
20	8.34	2.95	193	32.62	.11	193	1481.0	11.1	193
30	7.89	2.64	193	32.63	.11	193	1479.5	10.0	193
50	6.39	1.34	193	32.67	.11	193	1474.3	5.3	193
75	5.49	.69	193	32.71	.11	193	1471.2	2.8	193
100	4.99	.57	193	32.81	.17	193	1469.6	2.4	193
125	4.61	.53	193	33.17	.27	193	1469.0	2.3	193
150	4.37	.55	193	33.50	.19	193	1468.8	2.4	193
200	4.01	.45	193	33.74	.07	193	1468.5	2.0	193
250	3.82	.36	193	33.81	.06	192	1468.6	1.7	192
300	3.73	.27	193	33.88	.05	192	1469.1	1.4	192
400	3.65	.15	155	34.01	.04	155	1470.6	1.0	154
500	3.59	.11	122	34.11	.03	123	1472.2	.8	121
600	3.46	.08	115	34.19	.03	116	1473.4	.8	114
700	3.31	.07	115	34.26	.03	115	1474.5	.6	113
800	3.16	.06	116	34.31	.02	115	1475.5	.7	114
900	3.00	.05	116	34.35	.03	115	1476.6	.7	114
1000	2.85	.05	115	34.39	.03	113	1477.7	.6	112
1100	2.72	.04	112	34.42	.03	109	1478.8	.6	109
1200	2.59	.04	109	34.44	.03	106	1480.0	.6	106
1300	2.48	.04	104	34.47	.03	100	1481.2	.7	100
1400	2.38	.03	103	34.49	.02	99	1482.5	.5	99
1500	2.29	.03	90	34.51	.02	87	1483.8	.5	87
1750	2.08	.03	86	34.55	.02	84	1487.2	.5	84
2000	1.93	.02	62	34.58	.02	60	1490.9	.6	60
2500	1.72	.02	51	34.62	.01	49	1498.5	.3	49
3000	1.58	.01	48	34.65	.01	46	1506.6	.6	46
4000	1.51	.01	40	34.68	.02	38	1523.9	.3	37

Figure K-2. OWS PAPA - Winter

BEST AVAILABLE COPY

DEPTH	MEAN	TEMPERATURE	NUM	MEAN	SALINITY	NUM	MEAN	S.D.	SOUND VELOCITY	MEAN	S.D.	NUM
0	6.93	1.650	42	32.69	1.12	42	1475.6	.9	42	5.5	.5	42
10	6.76	1.41	42	32.67	1.10	42	1475.1			5.2		42
20	6.67	1.33	42	32.68	1.10	42	1474.9			5.2		42
30	6.54	1.19	42	32.68	1.10	42	1474.4			4.7		42
50	5.81	.72	42	32.69	.09	42	1472.0			2.9		42
75	5.33	.43	42	32.70	.09	42	1470.5			1.7		42
100	4.99	.37	42	32.76	.13	42	1469.6			1.6		42
125	4.71	.46	42	33.14	.27	42	1469.3			2.0		42
150	4.41	.58	42	33.50	.19	42	1469.0			2.6		42
200	4.04	.56	42	33.73	.08	42	1468.6			2.4		42
250	3.84	.49	42	33.82	.06	41	1468.7			2.2		41
300	3.76	.37	42	33.88	.05	41	1469.3			1.7		41
400	3.68	.24	30	34.01	.04	30	1470.8			2.9		29
500	3.63	.14	25	34.11	.03	25	1472.3			1.6		24
600	3.49	.10	23	34.19	.02	23	1473.5			1.5		22
700	3.34	.08	23	34.26	.02	22	1474.6			1.3		21
800	3.18	.06	24	34.31	.02	22	1475.6			1.3		22
900	3.02	.05	24	34.35	.02	22	1476.6			1.4		22
1000	2.87	.04	24	34.38	.02	22	1477.7			1.3		22
1100	2.72	.04	24	34.42	.02	22	1478.8			1.3		22
1200	2.60	.03	24	34.44	.02	23	1480.9			1.4		23
1300	2.49	.03	24	34.47	.02	23	1481.2			1.0		23
1400	2.38	.03	24	34.50	.02	23	1482.5			1.2		23
1500	2.29	.03	20	34.51	.02	19	1483.8			1.3		19
1750	2.09	.03	19	34.55	.01	18	1487.2			1.3		18
2000	1.93	.03	12	34.58	.01	11	1490.9			1.1		11
2500	1.72	.01	9	34.62	.01	6	1498.5			0.9		6
3000	1.57	.01	6	34.65	.01	7	1506.6			1.2		7
4000	1.51	.01	6	34.67	.01	6	1523.9			1.2		6

Figure K-3. OWS PAPA - Spring

BEST AVAILABLE COPY

DEPTH	MEAN TEMPERATURE S.D.	NUM	MEAN SALINITY S.D.	NUM	MEAN SOUND VELOCITY S.D.	NUM
0	12.31	1.14	57	32.56	1.10	57
10	12.10	1.10	57	32.56	1.10	57
20	11.85	1.18	57	32.56	1.10	57
30	10.50	2.05	57	32.59	1.10	57
50	6.88	1.15	57	32.70	1.11	57
75	5.46	1.54	57	32.74	1.10	57
100	4.98	1.52	57	32.82	1.15	57
125	4.69	1.53	57	33.17	1.25	57
150	4.50	1.57	57	33.53	1.18	57
200	4.11	1.50	57	33.75	1.07	57
250	3.88	1.39	57	33.82	1.05	57
300	3.76	1.31	57	33.88	1.05	57
400	3.66	1.16	46	34.01	1.03	46
500	3.59	1.10	38	34.11	1.03	39
600	3.46	1.06	37	34.20	1.03	38
700	3.31	1.06	37	34.26	1.02	38
800	3.15	1.06	37	34.31	1.02	38
900	3.00	1.05	37	34.35	1.02	38
1000	2.86	1.05	36	34.39	1.02	37
1100	2.72	1.05	33	34.42	1.02	33
1200	2.59	1.04	33	34.45	1.02	32
1300	2.48	1.04	32	34.47	1.02	30
1400	2.37	1.04	31	34.49	1.02	29
1500	2.28	1.04	27	34.51	1.01	25
1750	2.08	1.03	27	34.55	1.01	26
2000	1.93	1.03	22	34.58	1.01	21
2500	1.72	1.02	18	34.64	1.01	17
3000	1.57	1.01	17	34.65	1.01	16
4000	1.50	1.01	13	34.68	1.01	13

Figure K-4. OWS PAPA - Summer

BEST AVAILABLE COPY

DEPTH	MEAN	TEMPERATURE	NUM	MEAN	SALINITY	NUM	MEAN	S.D.	SOUND VELOCITY	S.D.	NUM
0	8.63	20.41	45	32.61	0.10	45	1481.9	9.0	9.0	4.5	45
10	8.70	20.35	45	32.59	0.09	45	1482.3	8.8	8.8	4.5	45
20	8.71	20.35	45	32.59	0.09	45	1482.5	8.8	8.8	4.5	45
30	8.62	20.24	45	32.59	0.09	45	1482.4	8.9	8.9	4.5	45
50	7.47	19.52	45	32.64	0.10	45	1478.5	5.8	5.8	4.5	45
75	5.92	9.8	45	32.73	0.13	45	1472.9	3.9	3.9	4.5	45
100	5.00	7.7	45	32.86	0.19	45	1469.7	3.2	3.2	4.5	45
125	4.48	5.9	45	33.07	0.28	45	1468.4	2.5	2.5	4.5	45
150	4.25	5.0	45	33.46	0.21	45	1468.3	2.1	2.1	4.5	45
200	3.91	3.2	45	33.72	0.08	45	1468.0	1.4	1.4	4.5	45
250	3.74	2.4	45	33.81	0.04	45	1468.3	1.1	1.1	4.5	45
300	3.67	1.3	45	33.88	0.04	45	1468.9	.7	.7	4.5	45
400	3.60	1.0	34	34.00	0.04	34	1470.4	.7	.7	3.4	3.4
500	3.56	0.8	26	34.11	0.03	26	1472.0	.4	.4	2.6	2.6
600	3.45	0.6	24	34.19	0.02	24	1473.3	.5	.5	2.4	2.4
700	3.34	0.5	24	34.26	0.02	24	1474.4	.3	.3	2.4	2.4
800	3.15	0.4	24	34.31	0.02	24	1475.5	.3	.3	2.4	2.4
900	3.00	0.5	24	34.35	0.02	24	1476.6	.4	.4	2.4	2.4
1000	2.85	0.5	24	34.38	0.02	23	1477.7	.4	.4	2.3	2.3
1100	2.70	0.5	24	34.41	0.02	23	1478.8	.3	.3	2.3	2.3
1200	2.58	0.4	22	34.44	0.02	21	1479.7	.4	.4	2.1	2.1
1300	2.47	0.4	20	34.47	0.02	19	1481.2	.3	.3	1.9	1.9
1400	2.37	0.3	20	34.49	0.02	19	1482.5	.2	.2	1.9	1.9
1500	2.28	0.3	18	34.50	0.01	18	1483.8	.3	.3	1.8	1.8
1750	2.08	0.2	18	34.55	0.01	18	1487.2	.4	.4	1.8	1.8
2000	1.92	0.2	10	34.58	0.01	10	1490.8	.2	.2	1.0	1.0
2500	1.71	0.1	8	34.62	0.01	8	1498.5	.0	.0	0.8	0.8
3000	1.58	0.2	8	34.65	0.01	8	1506.6	.3	.3	0.2	0.2
4000	1.51	0.1	6	34.67	0.01	6	1523.9	0.2	0.2	0	0

Figure K-4. OWS PAPA - Autumn

APPENDIX L

OCEAN WEATHER STATION VICTOR - (34°00'N, 164°00'E)

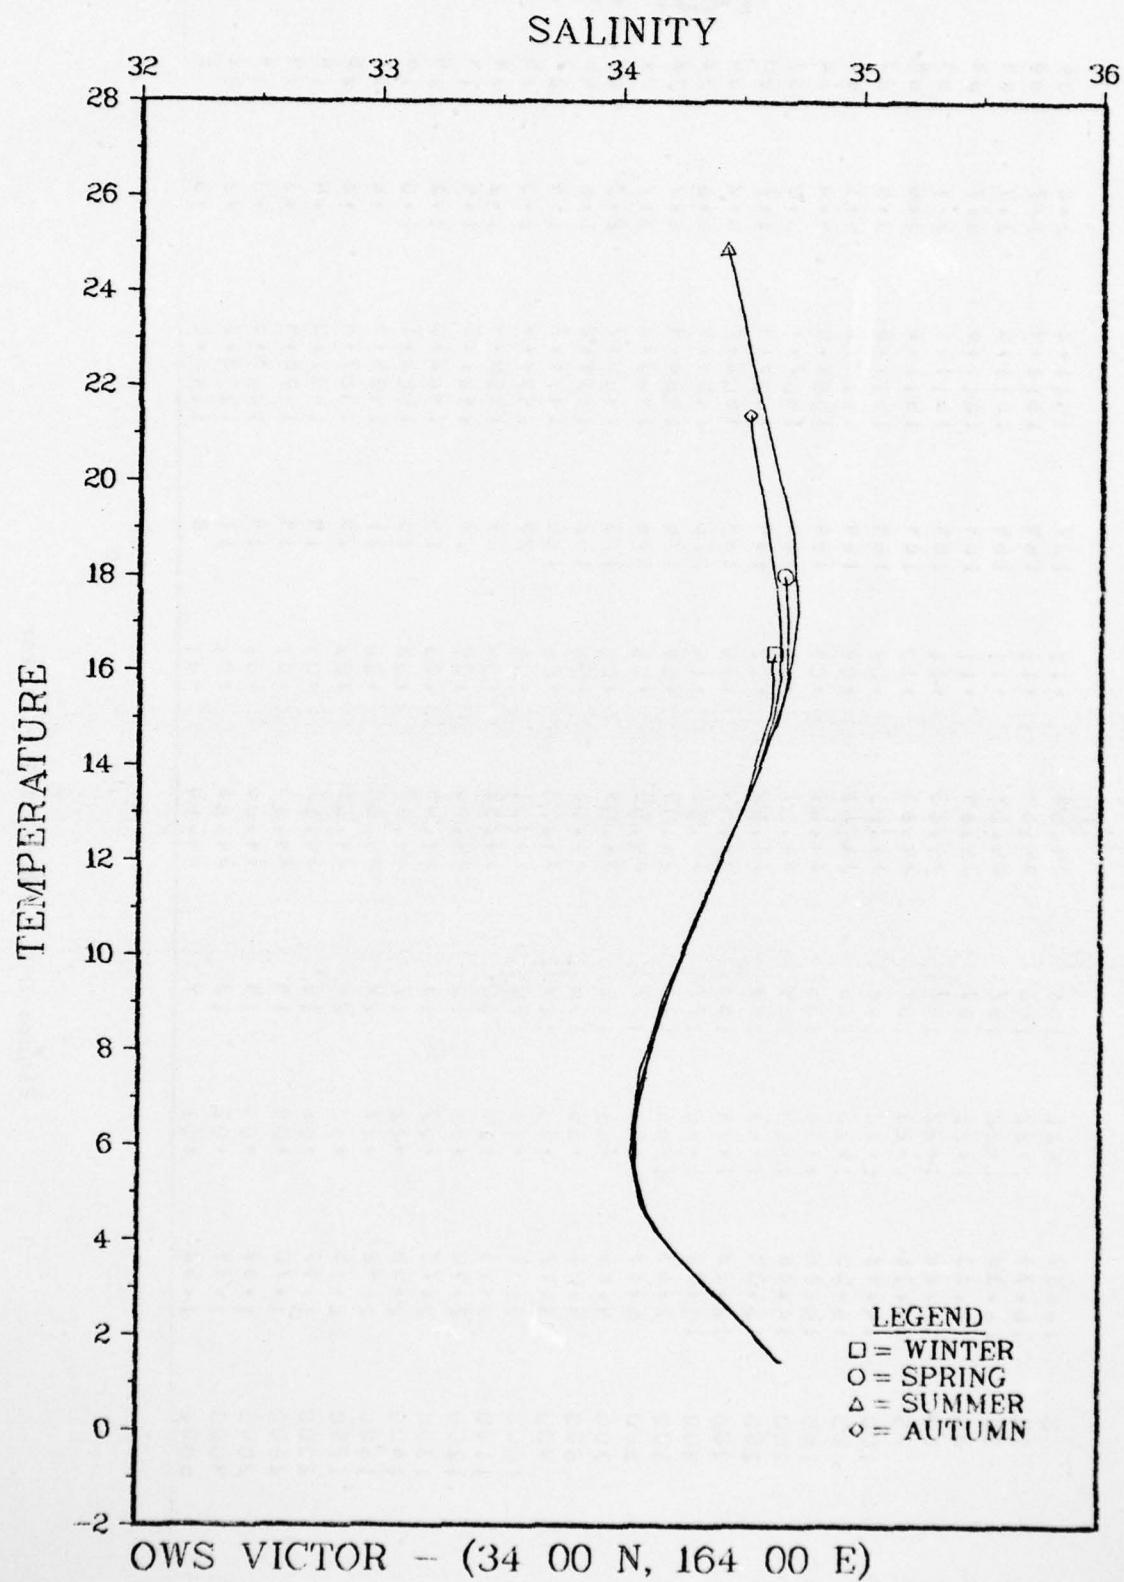


Figure L-1.

BEST AVAILABLE COPY

DEPTH	TEMPERATURE		MEAN S.D.	SALINITY	MEAN S.D.	NUM	SOUND VELOCITY	
	MEAN	S.D.					S.D.	MEAN
0	16.39	1.21	166	34.64	187	186	1511.6	3.08
10	16.39	1.22	166	34.64	187	184	1511.4	3.07
20	16.35	1.22	167	34.64	187	184	1511.5	3.07
30	16.33	1.21	167	34.64	187	184	1511.6	3.07
50	16.26	1.22	167	34.63	187	184	1511.7	3.07
75	16.16	1.23	167	34.63	187	184	1511.6	3.06
100	16.02	1.23	166	34.63	187	184	1511.5	3.08
125	15.55	1.28	166	34.63	187	184	1510.7	4.01
150	15.16	1.36	185	34.62	187	184	1509.8	4.04
200	14.28	1.50	184	34.57	187	184	1507.7	5.0
250	13.34	1.65	183	34.52	187	184	1505.4	5.7
300	12.33	1.74	183	34.44	187	184	1502.7	6.2
400	10.02	1.60	177	34.26	187	176	1495.9	6.8
500	7.63	1.45	177	34.09	187	175	1488.4	5.7
600	5.89	0.92	177	34.03	187	176	1483.2	3.7
700	4.85	0.55	175	34.09	187	173	1480.7	2.3
800	4.21	0.35	156	34.16	186	152	1479.8	1.6
900	3.77	0.30	129	34.24	186	128	1479.7	1.4
1000	3.41	0.27	80	34.31	186	79	1479.7	1.2
1100	3.13	0.29	30	34.35	186	29	1480.4	1.2
1200	2.90	0.31	15	34.40	186	15	1481.2	1.4
1300	2.70	0.27	15	34.44	186	14	1482.0	1.2
1400	2.55	0.22	17	34.47	186	16	1483.1	1.0
1500	2.42	0.17	22	34.50	186	21	1484.3	0.8
1750	2.15	0.12	26	34.55	186	25	1487.4	0.6
2000	1.97	0.06	15	34.57	186	14	1491.0	0.4
2500	1.70	0.04	14	34.63	186	14	1498.4	0.3
3000	1.57	0.04	14	34.66	186	14	1500.5	0.3
4000	1.49	0.02	12	34.66	186	14	1523.7	0.2
5000	1.52	0.01	9	34.63	186	8	1541.6	0.3

Figure L-1. OWS VICTOR - Winter

BEST AVAILABLE COPY

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY	
	MEAN	S.O.D.	MEAN	S.O.D.	MEAN	S.O.D.
0	18.04	1.63	420	34.66	422	1516.1
10	17.85	1.53	421	34.66	422	1515.7
20	17.34	1.37	421	34.69	422	1514.4
30	16.83	1.34	422	34.69	422	1513.0
50	16.00	1.43	422	34.67	422	1510.6
75	15.37	1.47	422	34.67	422	1509.3
100	14.96	1.55	422	34.65	422	1508.3
125	14.62	1.63	422	34.62	421	1507.6
150	14.31	1.70	421	34.60	421	1507.0
200	13.64	1.61	419	34.53	421	1505.5
250	12.81	1.92	415	34.46	420	1503.5
300	11.87	2.01	411	34.41	417	1500.9
400	9.70	2.03	397	34.24	404	1494.0
500	7.46	1.62	397	34.10	401	1487.7
600	5.79	1.03	402	34.06	407	1482.8
700	4.76	0.56	400	34.14	404	1480.3
800	4.14	0.35	390	34.10	390	1479.0
900	3.71	0.27	341	34.20	338	1479.5
1000	3.36	0.22	236	34.34	234	1479.7
1100	3.02	0.21	86	34.39	84	1480.0
1200	2.73	0.19	47	34.44	47	1480.0
1300	2.60	0.14	37	34.47	39	1481.7
1400	2.50	0.15	30	34.48	30	1483.0
1500	2.39	0.14	31	34.50	31	1484.2
1750	2.12	0.07	31	34.56	31	1487.3
2000	1.93	0.06	24	34.59	24	1490.6
2500	1.69	0.04	21	34.64	21	1498.3
3000	1.56	0.03	20	34.65	20	1506.5
4000	1.49	0.02	18	34.67	18	1523.7
5000	1.50	0.02	12	34.67	12	1541.6

Figure L-2. OWS VICTOR - Spring

# BEST AVAILABLE COPY

DEPTH	TEMPERATURE		SALINITY		SOUND VELOCITY		
	MEAN	S.D.	MEAN	S.D.	MEAN	S.D.	
0	24.91	1.45	40.2	34.93	0.17	40.5	34.9
10	24.39	1.64	40.5	34.46	0.16	40.5	34.2
20	22.89	1.65	40.5	34.52	0.15	40.5	34.9
30	21.47	2.17	40.5	34.59	0.15	40.5	34.8
50	18.97	2.08	40.5	34.71	0.12	40.5	34.5
75	17.29	1.91	40.5	34.73	0.11	40.5	34.9
100	16.36	1.80	40.5	34.74	0.11	40.5	34.7
125	15.75	1.76	40.5	34.69	0.12	40.5	34.7
150	15.26	1.76	40.5	34.66	0.13	40.5	34.9
200	14.43	1.89	40.4	34.61	0.14	40.5	34.4
250	13.51	2.00	40.4	34.54	0.15	40.4	34.9
300	12.49	2.05	40.4	34.45	0.15	40.2	34.3
400	10.23	2.02	36.9	34.27	0.16	36.6	34.6
500	7.94	1.75	36.4	34.13	0.11	38.1	34.9
600	6.10	1.22	39.2	34.06	0.06	38.9	34.8
700	4.97	0.72	38.7	34.09	0.05	38.7	34.7
800	4.26	0.43	37.0	34.16	0.06	36.9	34.0
900	3.80	0.29	32.8	34.23	0.06	32.9	32.7
1000	3.40	0.22	21.4	34.30	0.05	21.6	32.4
1100	3.17	0.15	7.6	34.36	0.04	7.8	30.1
1200	2.94	0.15	2.3	34.40	0.03	2.3	36.8
1300	2.74	0.16	1.7	34.44	0.03	1.7	36.1
1400	2.56	0.12	1.7	34.47	0.03	1.7	32.7
1500	2.41	0.11	1.9	34.50	0.03	1.9	32.4
1750	2.14	0.09	2.9	34.55	0.02	2.9	32.4
2000	1.94	0.07	2.0	34.58	0.02	2.0	30.0
2500	1.67	0.04	1.9	34.63	0.02	1.9	29.8
3000	1.56	0.03	1.9	34.65	0.01	1.9	29.4
4000	1.47	0.02	1.9	34.67	0.01	1.9	29.3
5000	1.51	0.01	1.4	34.68	0.01	1.4	29.4

Figure L-3. OWS VICTOR - Summer

BEST AVAILABLE COPY

DEPTH	MEAN	TEMPERATURE S. O. S.	NUM	SALINITY			MEAN	S. D.	NU	SOUND VELOCITY		
				MEAN	S. D.	NU	MEAN	S. D. U.	NU	MEAN	S. D. U.	NU
0	21.41	2.19	302	34.53	.12	304	1525.1	.8	302	5.8	.8	302
10	21.37	2.16	302	34.53	.12	304	1525.2	.8	302	5.8	.8	302
20	21.33	2.13	303	34.53	.12	304	1525.2	.8	303	5.8	.8	303
30	21.21	2.09	303	34.53	.12	304	1525.1	.6	303	5.6	.6	303
50	20.14	1.84	303	34.57	.11	304	1522.7	.2	303	5.2	.2	303
75	18.36	2.19	303	34.63	.11	303	1518.1	.4	302	6.4	.4	302
100	16.93	2.13	304	34.66	.11	303	1514.4	.5	303	6.5	.5	303
125	15.97	2.01	304	34.66	.12	303	1511.6	.3	303	6.3	.3	303
150	15.21	1.93	304	34.64	.13	303	1509.9	.3	303	6.3	.3	303
200	14.04	1.94	304	34.58	.14	303	1507.0	.5	303	6.5	.5	303
250	13.01	2.02	301	34.50	.15	303	1504.1	.9	303	6.9	.9	303
300	11.83	2.08	300	34.40	.16	301	1500.7	.3	297	7.3	.3	297
400	9.22	1.98	283	34.19	.16	287	1492.8	.4	281	7.4	.4	281
500	7.07	1.58	280	34.08	.19	278	1486.2	.2	275	6.2	.2	275
600	5.59	1.12	269	34.07	.05	264	1481.9	.6	263	4.6	.6	263
700	4.63	.69	255	34.12	.06	251	1480.0	.0	251	3.0	.0	251
800	4.07	.42	236	34.19	.07	234	1479.2	.9	233	1.9	.9	233
900	3.66	.32	197	34.20	.06	197	1479.2	.4	193	1.4	.4	193
1000	3.39	.25	120	34.32	.05	119	1479.7	.2	117	1.2	.2	117
1100	3.21	.26	42	34.35	.05	43	1480.8	.1	42	1.1	.1	42
1200	3.04	.22	16	34.38	.04	19	1481.8	.9	18	1.9	.9	18
1300	2.80	.17	17	34.43	.03	17	1482.5	.8	17	1.8	.8	17
1400	2.61	.15	17	34.47	.03	17	1483.4	.6	17	1.6	.6	17
1500	2.44	.13	19	34.50	.02	19	1484.4	.6	19	1.6	.6	19
1750	2.15	.19	22	34.55	.02	22	1487.4	.4	22	1.4	.4	22
2000	1.95	.09	11	34.57	.01	11	1490.9	.5	11	1.5	.5	11
2500	1.71	.05	10	34.63	.01	10	1498.4	.4	10	1.4	.4	10
3000	1.59	.02	10	34.65	.01	10	1506.5	.3	10	1.3	.3	10
4000	1.49	.03	7	34.68	.01	9	1523.7	.3	7	1.3	.3	7
5000	1.50	.02	8	34.68	.01	8	1541.6	.3	8	1.3	.3	8

Figure L-4. OWS VICTOR - Autumn

**DISTRIBUTION LIST**

**DATE:** June 1977      **SERIAL:** 3700-67-77

**SUBJECT:**  
Variability of Oceanographic Conditions at Ocean Weather  
Stations in the North Atlantic and North Pacific Oceans

TECHNICAL NOTE 3700-67-77	EVALUATION REPORT
PROGRESS/STATUS REPORT	OTHER
SYSTEMS ANALYSIS REPORT	
LETTER	

**CLASSIFICATION:** \_\_\_\_\_ **NUMBER OF COPIES MADE:** \_\_\_\_\_

COPY NO.	(Internal)	COPY NO.
1	Code 00	21
2	Code 01	22
3	Code 02	23
4	Code 0111	24
5	Code 1600	25
6	Code 3000	
7	Code 3004	
8	Code 3005	
9	Code 3400	
10	Code 3423	
11	Code 3440	
12	Code 3500	
13	Code 3700	
14	Code 3710	
15	Code 3720	
16		
17		
18		
19		
20		

**REMARKS:**