

November 1977

Approved for Public Release; Distribution Unlimited.

Prepared for

DEPUTY FOR COMMAND AND MANAGEMENT SYSTEMS ELECTRONIC SYSTEMS DIVISION HANSCOM AIR FORCE BASE, MA 01731

ADA051323

## LEGAL NOTICE

When U.S. Government drawings, specifications or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or conveying any rights or permission to manufacture, use, or sell ony patented invention that may in any way be related thereto.

## OTHER NOTICES

Do not return this copy. Retain or destroy.

"This technical report has been reviewed and is approved for publication."

Pleiven Meister

STEVE MEISTER, Captain, USAF Project Engineer

ANTON S. SEGOTA, GS-: Project Engineer

J. P. VETRANO, Director COMSEC Engineering Office Deputy for Command and Management Systems

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Date End

SECURITY CLASSIFICATION OF THIS PAGE (When Deter	chiered)	
REPORT DOCUMENTATION		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
ESD-TR-77-328		
4. TITLE (and Subtitie) INTELLIGIBILITY PERFORMANCE OF		5. TYPE OF REPORT & PERIOD COVERED Interim Report
NARROWBAND LINEAR PREDICTIVE V		March 1977 - November 1977
IN THE PRESENCE OF BIT ERRORS	OCODENO	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(a)		8. CONTRACT OR GRANT NUMBER(*)
CALDWELL P. SMITH		IN-HOUSE
9. PERFORMING ORGANIZATION NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Voice Processing Laboratory		3340IF
COMSEC Engineering Office		Project 7820 Task 02/01
Electronic Systems Division, Hanscom	AFB, MA UI731	12. REPORT DATE
Deputy for Command and Management	Systems	NOVEMBER 1977
Electronic Systems Division, Hanscom	AFB, MA 01731	13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS(II different	t from Controlling Office)	15. SECURITY CLASS. (of this report)
		UNCLASSIFIED
		15e. DECLASSIFICATION/DOWNGRADING SCHEDULE
		N/A
16. DISTRIBUTION STATEMENT (of this Report)		
17. DISTRIBUTION STATEMENT (of the obstract entered)	in Block 20, if different from	m Report)
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and	d identify by block number)	
Voice Communication	, e, e, e, and ()	DRT
Speech Intelligibility		Vocoders
Test and Evaluation		Linear Prediction Coding
Diagnostic Rhyme Test		LPC Speech Processing
Narrowband Speech 20. ABSTRACT (Continue on reverse side if necessary and	I identify by black wash	speech riocessing
Diagnostic speech intelligibility tests	were evaluated to	assess vulnerability of two
different 2400 bit-per-second linear p	redictive vocoder of	algorithms to random bit errors
imposed on the data stream. Listening	tests with crews o	f eight subjects yielded
diagnostic intelligibility scores at zero	o, 1%, 3%, and 5%	% bit error rates. These data
were analyzed to establish linear rear	ession models relati	ing intelligibility performance
and bit error rate. Piecewise-linear p	prediction coding (I	PLPC) was confirmed to have
a small but significant advantage through	ugh being less vuln	erable to bit errors than

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## ABSTRACT (Con't)

conventional linear prediction coding (LPC), an advantage that had been hypothesized from the inherent redundancy that is added by transmitting separate LPC coefficients for low-frequency and high-frequency speech bands. A small but consistent improvement in intelligibility was also found for the error-free case, believed to result from improved spectrum modeling that is a consequence of the piecewise approach. Significant differences in susceptibilities to bit errors were found among individual intelligibility scores for speakers as well as for intelligibility features. Tables for predicting average intelligibility performance, and confidence limits, were constructed from the regression models. The findings provide guidance for further research towards the goal of minimizing susceptibility of narrowband LPC vocoders to jamming and interference. They also highlight a need for further studies to obtain better understanding of causes of the typical large dispersion in intelligibility scores for individual speakers, obtained in these and many other tests. Such knowledge could contribute to improving voice processor designs and to a goal of speech systems that would provide fully adequate intelligibility for 95% or 99% of the population of speakers using these voice communications devices.

#### UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

#### TABLE OF CONTENTS

LIST OF ILLUSTRATIONS	vi
LIST OF TABLES	vii
1.0 INTRODUCTION	1
1.1. Susceptibility of intelligibility features to bit errors 1.2. Susceptibility of individual speakers to bit errors 1.3. Regression models relating speech intelligibility scores	2 2
with bit error rate	3
2.0 TEST AND EVALUATION PROCEDURES	4
<ul><li>2.1. Diagnostic Rhyme Test</li><li>2.2. Analysis of variance</li><li>2.3. Tests of normality and equality of variance</li><li>2.4. Paired intelligibility scores</li></ul>	5 5 6
3.0 NARROWBAND VOICE PROCESSOR CONFIGURATIONS	7
4.0 EFFECTS OF BIT ERRORS ON LPC-10 AT 2400 BITS PER SECOND	8
4.2. Susceptibility of intelligibility scores of individual	11 13
5.0 EFFECTS OF BIT ERRORS ON PLPC AT 2400 BITS PER SECOND	14
<ul> <li>5.1. Susceptibility of scores for intelligibility features to bit errors: PLPC at 2400 bits per second.</li> <li>5.2. Susceptibility of intelligibility scores of individual speakers to bit error effects: PLPC at 2400 bits per second</li> </ul>	17 19
6.0 COMPARISONS OF PERFORMANCE OF LPC AND PLPC OPERATING AT 2400 BITS PER SECOND IN THE PRESENCE OF BIT ERRORS	20
	20 26
intelligibility vs. bit error rate 6.4. Comparisons of regression slopes: intelligibility feature	28 29

7.0 DISCUSSION OF FINDINGS	31
7.1. Comparison of LPC and PLPC processor algorithms 7.2. Implications for digital voice terminal hardware	32
development 7.3. Implications for intelligibility test and evaluation	36
procedures and standards	37
8.0 CONCLUSIONS AND RECOMMENDATIONS	39
<b>BIBLIOGRA PHY</b>	41
APPENDICES:	
APPENDIX A. INTELLIGIBILITY DATA FOR VOICING FEATURE	
A.1. DRT test words for voicing	42
A.2. Data table: Voicing intelligibility scores for	
LPC and PLPC processors	43
A.3. Analysis of variance summaries: A.3.1. Voicing (Total)	46
A.3.2. Voicing present	47
A.3.3. Voicing absent	48
A.4. Cumulative distributions: DRT scores for voicing	
A.4.1. LPC-10 at 2400 BPS with bit errors	49
A.4.2. PLPC at 2400 BPS with bit errors	49
A.5. Regression models and scatter plots: voicing scores	
vs. bit error rate	50
A.5.1. LPC-10 at 2400 BPS A.5.2. PLPC at 2400 BPS	50
A.6. Predicted intelligibility scores for voicing in	50
presence of bit errors	
A.6.1. LPC-10 at 2400 BPS	51
A.6.2. PLPC at 2400 BPS	51
APPENDIX B. INTELLIGIBILITY DATA FOR NASALITY FEATURE	
B.1. DRT test words for nasality	52
B.2. Data table: <u>Nasality</u> intelligibility scores for	
LPC and PLPC processors	53
B.3. Analysis of variance summaries:	
B.3.1. Nasality (Total)	56
B.3.2. Nasality present	57
B.3.3. Nasality absent	58
B.4. Cumulative distributions: DRT scores for nasality	
B.4.1. LPC-10 at 2400 BPS with bit errors	59
B.4.2. PLPC at 2400 BPS with bit errors	59

B.5. Regression models and scatter plots: <u>nasality</u> scores vs. bit error rate	
B.5.1. LPC-10 at 2400 BPS B.5.2. PLPC at 2400 BPS	60 60
B.6. Predicted intelligibility scores for <u>nasality</u> in presence of bit errors	
B.6.1. LPC-10 at 2400 BPS B.6.2. PLPC at 2400 BPS	61 61
	01
APPENDIX C. INTELLIGIBILITY DATA FOR SUSTENTION FEATURE	
C.l. DRT test words for <u>sustention</u> C.2. Data table: Sustention intelligibility scores for	62
LPC and PLPC processors	63
C.3. Analysis of variance summaries: C.3.1. Sustention (Total)	66
C.3.2. Sustention (voiced)	67
C.3.3. <u>Sustention (unvoiced)</u> C.4. Cumulative distributions: DRT scores for sustention	68
C.4.1. LPC-10 at 2400 BPS with bit errors	69
C.4.2. PLPC at 2400 BPS with bit errors C.5. Regression models and scatter plots: sustention scores	69
vs. bit error rate	
C.5.1. LPC-10 at 2400 BPS C.5.2. PLPC at 2400 BPS	70 70
C.6. Predicted intelligibility scores for sustention in	, .
presence of bit errors C.6.1. LPC-10 at 2400 BPS	71
C.6.2. PLPC at 2400 BPS	71
APPENDIX D. INTELLIGIBILITY DATA FOR SIBILATION FEATURE	
D.1. DRT test words for sibilation	72
D.2. Data table: <u>Sibilation</u> intelligibility scores for LPC and PLPC processors	73
D.3. Analysis of variance summaries:	-
D.3.1. <u>Sibilation</u> ( <u>Total</u> ) D.3.2. Sibilation (voiced)	76 77
D.3.3. Sibilation (unvoiced)	78
D.4. Cumulative distributions: DRT scores for <u>sibilation</u> D.4.1. LPC-10 at 2400 BPS with bit errors	79
D.4.2. PLPC at 2400 BPS with bit errors	79
D.5. Regression models and scatter plots: <u>sibilation</u> scores vs. bit error rate	
D.5.1. LPC-10 at 2400 BPS	80
D.5.2. PLPC at 2400 BPS D.6. Predicted intelligibility scores for sibilation in	80
presence of bit errors	
D.6.1. LPC-10 at 2400 BPS D.6.2. PLPC at 2400 BPS	81 81
D. O. Z. IDLO GE ZTOO DLD	01

# APPENDIX E. INTELLIGIBILITY DATA FOR GRAVENESS FEATURE

		DRT test words for graveness	82
	E.2.	Data table: Graveness intelligibility scores for	~ 1
		LPC and PLPC processors	84
	E.3.	Analysis of variance summaries:	07
		E.3.1. <u>Graveness</u> ( <u>Total</u> )	87
		E.3.2. <u>Graveness (voiced</u> )	88
	<b>D</b> /	E.3.3. Graveness (unvoiced)	89
	E.4.	Cumulative distributions: DRT scores for graveness	00
		E.4.1. LPC-10 at 2400 BPS with bit errors	90
	TP F	E.4.2. PLPC at 2400 BPS with bit errors	90
	E.J.	Regression models and scatter plots: <u>graveness</u> scores vs. bit error rate	
		E.5.1. LPC-10 at 2400 BPS	91
		E.5.2. PLPC at 2400 BPS	91
	F 6	Predicted intelligibility scores for graveness in	21
	L. U.	presence of bit errors	
		E.6.1. LPC-10 at 2400 BPS	92
		E.6.2. PLPC at 2400 BPS	92
			12
APPE	NDIX	F. INTELLIGIBILITY DATA FOR COMPACTNESS FEATURE	
		DRT test words for compactness	93
	F.2.	Data table: Compactness intelligibility scores for	
	_	LPC and PLPC processors	96
	F.3.	Analysis of variance summaries:	~ ~
		F.3.1. Compactness (Total)	99
		F.3.2. Compactness (voiced)	100
	<b>n</b> /	F.3.3. Compactness (unvoiced)	101
	F.4.	Cumulative distributions: DRT scores for <u>compactness</u>	1.02
		F.4.1. LPC-10 at 2400 BPS with bit errors F.4.2. PLPC at 2400 BPS with bit errors	102 102
	F 5		102
	r.J.	Regression models and scatter plots: <u>compactness</u> scores vs. bit error rate	
		F.5.1. LPC-10 at 2400 BPS	103
		F.5.2. PLPC at 2400 BPS	103
	F 6	Predicted intelligibility scores for compactness in	105
	1.0.	presence of bit errors	
		F.6.1. LPC-10 at 2400 BPS	104
		F.6.2. PLPC at 2400 BPS	104
APPE	NDIX	G. SUMMARIES OF REGRESSION MODELS FOR INTELLIGIBILITY FEATUR	ES
	C 1	Linear regression equations for all feature states:	
	G.1.	LPC-10 at 2400 BPS with bit errors	105
	G 2	PLPC at 2400 BPS with bit errors	105
		Confidence limits for regression coefficients, all feature	100
	0.5.	states: LPC-10 at 2400 BPS with bit errors	106

G.4.	Confidence limits for regression coefficients, all feature	
	states: PLPC at 2400 BPS with bit errors	106
G.5.	Comparisons of predicted and actual feature scores:	
	G.5.1. Expected feature scores: LPC-10 at 2400 BPS	107
	G.5.2. Expected feature scores: PLPC at 2400 BPS	107
	G.5.3. Predicted 97-1/2% limits of data: LPC-10	108
	G.5.4. Predicted 97-1/2% limits of data: PLPC	108

APPENDIX H. TOTAL DRT INTELLIGIBILITY SCORES

H.1.	Data table: Total DRT intelligibility scores for LPC and	
	PLPC processors at 2400 BPS with bit errors	109
H.2.	Analysis of variance summary: total intelligibility scores	112
Н.З.	Cumulative distributions: Total DRT intelligibility scores	
	for LPC and PLPC processors compared at zero bit error	
	rate, by speakers:	
	H.3.1. Speaker LL	113
	H.3.2. Speaker RH	113
	H.3.3. Speaker CH	114
	H.3.4. Speaker PK	114
	H.3.5. Speaker JE	115
	H.3.6. Speaker BV	115
н.4.	Regression models and scatter plots for total DRT	
	intelligibility scores vs. bit error rate, by speakers:	
	H.4.1. Speaker LL	
	A. LPC-10	116
	B. PLPC	116
	H.4.2. Speaker RH	
	A. LPC-10	117
	B. PLPC	117
	H.4.3. Speaker CH	
	A. LPC-10	118
	B. PLPC	118
	H.4.4. Speaker PK	
	A. LPC-10	119
	B. PLPC	119
	H.4.5. Speaker JE	
	A. LPC-10	120
	B. PLPC	120
	H.4.6. Speaker BV	
	A. LPC-10	121
	B. PLPC	121

## APPENDIX I. STATISTICAL FORMULATIONS

I.l. Linear regression	122
I.2. Lilliefors' test for conformity with a normal distribution	127
I.3. Bartlett's test for homogeneity of variance	128
I.4. Comparison of two populations by paired samples	129
DISTRIBUTION LIST	130

## LIST OF ILLUSTRATIONS

Figu	ire Title P	age
1	Salient parameters of LPC and PLPC processor configurations	4
2	Distributions of total intelligibility scores for LPC-10	8
3	Scatter plot of scores, and linear regression model for total DRT intelligibility of LPC-10 at 2400 BPS with bit errors	10
4	Linear regression models for individual intelligibility feature scores for LPC-10 at 2400 BPS with bit errors	12
5	Linear regression models for individual speaker's total intelligibility scores vs. bit error rate, for LPC-10	14
6	Distributions of total intelligibility scores for pie <b>c</b> ewise linear predictive coding (PLPC) at 2400 BPS	15
7	Scatter plot of scores, and linear regression model for total DRT intelligibility of PLPC at 2400 BPS with bit errors	16
8	Linear regression models for individual intelligibility feature scores for PLPC at 2400 BPS with bit errors	18
9	Linear regression models for individual speaker's total intelligibility scores vs. bit error rate, for PLPC	20
10	Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with zero bit error rate	24
11	Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with 1% bit error rate	24
12	Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with 3% bit error rate	25
13	Comparison of distributions of total DRT intelligibility scores for LPC and PLPC processors at 2400 BPS with 5% error rate	25

## LIST OF TABLES

Table	e Nr. Title	Page
1	Predicted intelligibility performance of LPC-10 at 2400 BPS in the presence of bit errors	10
2	Comparison of actual intelligibility scores and scores predicte by the linear regression model, for LPC-10 at 2400 BPS	d 11
3	Summary of linear regression equations describing intelligibili scores for individual features, LPC-10 at 2400 BPS in the presence of bit errors	ty 12
4	Analysis of variance results comparing regression slopes for total intelligibility scores of individual speakers, obtained with LPC-10 at 2400 BPS with bit errors	13
5	Predicted intelligibility performance of PLPC at 2400 BPS in the presence of bit errors	16
6	Comparison of actual scores and scores predicted by the linear regression model, PLPC at 2400 BPS	17
7	Summary of linear regression equations describing intelligibili scores for individual features, PLPC at 2400 BPS in the presenc of bit errors	
8	Analysis of variance results comparing regression slopes for to intelligibility scores of individual speakers, PLPC at 2400 BPS	
9.1	Three-way analysis of variance results comparing intelligibilit scores for LPC-10 and PLPC at 2400 BPS with bit errors. Part 1. Significant differences	у 21
9.2	Three-way analysis of variance. Part 2. Significant interaction	ns 22
10	Comparison of total intelligibility scores at each error rate	23
11.1	Results of pairwise comparisons of LPC and PLPC intelligibility scores: Part 1. Differences favoring LPC-10.	26
11.2	Results of pairwise comparisons of LPC and PLPC intelligibility scores: Part 2. Differences favoring PLPC	27
12.1	Analysis of variance summary comparing regression slopes	28
12.2	Comparison of regression slopes, by individual speakers	29
12.3	Comparison of regression slopes, individual features	30

#### 1.0. INTRODUCTION.

The susceptibility to bit errors manifested by different voice digitizer systems represents an important factor for test and evaluation, since it is a performance attribute that provides a measure of the vulnerability of a system to jamming and interference that might be encountered in a military communications environment. Error detection and correction, and other coding schemes imposed on the data stream generated by a voice digitizer can provide valuable means for reducing this susceptibility. This study, however, was concerned with assessing intrinsic vulnerability of two narrowband digital voice communications techniques based on linear predictive coding (LPC), apart from any additional protection that could be added by special coding schemes of bit placement, data smoothing, error detection and correction, etc.

Two LPC-based voice processor algorithms were evaluated. One used a conventional version of LPC-10, a linear predictive coding arrangement in which ten coefficients were calculated from analysis of the speech signal and transmitted together with pitch and energy data in a narrowband digital representation at 2400 bits per second.

The second version was based on a more recent innovation called "piecewise" linear predictive coding (PLPC), which also utilized analysis and transmission of ten coefficients in a 2400 BPS data stream. However, in this case the LPC coefficients were divided between a low-frequency band of speech (six coefficients) and a high-frequency band (four coefficients). Prior tests and evaluation of the PLPC method have shown that a PLPC(6/4) processor configuration resulted in highly intelligible voice transmission at 2400 BPS. The speech quality was almost indistinguishable from conventional LPC; however, close listening left an impression that the consonant sounds were crisper and clearer than with conventional LPC processing.

The earlier studies led to a conclusion that the PLPC innovation provided advantages both thru a small improvement in speech intelligibility in comparison with conventional LPC, and through relaxing the speed and computational complexity requirements levied on a voice processor terminal. It was hypothesized that the improvement in intelligibility derived from the fact that piecewise modeling of a speech signal contributes to a more accurate representation of a voice than conventional linear predictive coding. The hardware advantages: a lowering of the processor speed requirement, and reduction in the total number of arithmetic operations, offer a potential for designing a voice processor terminal with slower, less costly circuitry, or alternatively, freeing up computational capacity in the processor terminal that could be time-shared to support other functions such as transmitting and receiving modems, signalling and supervision, acoustic noise abatement, etc. It was further hypothesized that the piecewise-LPC approach would have advantages for reducing vulnerability to bit errors incurred in voice transmission over an imperfect channel. This prediction was based on consideration of the added redundancy provided by the PLPC data format. Since the LPC coefficients for the separate frequency bands are transmitted as independent parameters, when a bit error occurs in one of the coefficient values it can affect only a limited part of the output speech spectrum, rather than affecting the entire voice spectrum as occurs with conventional LPC. With the effect of a bit error segregated to only a portion of the output signal, it was anticipated that the PLPC vocoder design would establish narrowband speech communications providing intelligibility and quality intrinsically less vulnerable to bit errors (and hence to jamming and interference) than a conventional LPC vocoder. An objective of this study was to test this hypothesis.

The comparisons of performance of LPC and PLPC techniques assumed increased importance because of potential advantages foreseen for the PLPC processor in implementation of a multiple-rate processor arrangement capable of supporting wideband as well as narrowband digital speech communications modes. While the piecewise-LPC approach has not yet been investigated in this context, the two prime advantages of PLPC: improved intelligibility, and relaxed hardware requirements, would in principal carry over to a wideband version that provided an additional data component specifying an error signal (residual) for benefits in improved speech quality and naturalness, and tolerance to acoustic noise environments. A voice terminal based on this approach would include an 8 or 9.6 Kbps transmission mode in addition to the 2400 BPS narrowband configuration. By embedding the narrowband voice data in the wideband data stream, special advantages would be obtained for tandem arrangements of wideband and narrowband digital communications channels.

1.1. Susceptibility of Intelligibility Features to Bit Errors.

The Diagnostic Rhyme Test (DRT) used to assess speech intelligibility performance provides assessment of intelligibility scores for the separate components or features that characterize the consonant sounds of speech: voicing, <u>nasality</u>, <u>sustention</u>, <u>sibilation</u>, <u>graveness</u>, and <u>compactness</u>, as well as an overall intelligibility score. An additional objective of this study was to assess the degree to which individual features vary in susceptibility to bit errors. Identification of the features having the greatest vulnerability to bit errors would provide guidance in devising refinements of the speech processing algorithms to minimize bit error effects.

1.2. Susceptibility of individual Speakers to Bit Errors.

Speech intelligibility testing over the past several years has shown consistently that there are large, significant differences in intelligibility scores of different speakers. It was anticipated that different individuals would vary in regard to the effect of bit errors on their intelligibility scores. This question is important from the point of view of determining confidence limits for predicting the speech intelligibility that might be obtained in various bit error environments. It would be highly desirable to be able to make a reliable forecast of the level of speech intelligibility that could be expected for 95% or 99% of the population of speakers using a digital voice communications channel, both for the condition of an error-free channel and at specified levels of bit error rates due to jamming or interference. These tests with six male speakers and several bit error rates represented a step towards this objective.

1.3. Regression Models relating speech intelligibility scores with bit error rate.

Speech intelligibility data obtained in these tests was used in calculating linear regression models relating the speech intelligibility performance and the bit error cate conditions. Slopes of the regression lines that estimated the intelligibility performance in the presence of bit errors can be interpreted as figures of merit estimating the susceptibility of particular combinations of voice processor, speaker, and intelligibility feature, to the effects of bit errors. The linear regression equations also permitted interpolation and extrapolation to predict the intelligibility that could be expected at additional bit error rates from those actually used in the tests. Confidence limits were also calculated for these estimates.

#### 2.0. TEST AND EVALUATION PROCEDURES.

Intelligibility tests followed general guidelines laid down in previous formal tests for assessing and comparing the intelligibility performance of different voice processor terminals. The salient parameters of the LPC and PLPC voice processing algorithms are summarized in Fig. 1. The voice processor configurations were implemented with software running on the CSP-30 Signal Processor in the Speech Processing Laboratory at Air Force Electronic Systems Division (MCE). Recordings of intelligibility tests were processed with a version of the computer programs that permits random bit errors to be automatically imposed on the data stream at 2400 BPS that connects the voice analyser and synthesizer.

#### VOICE PROCESSOR CONFIGURATIONS

LPC at 2400 Bits per Second

10th order.

4 Khz bandwidth; 121 usec. sample rate. 172 samples per frame, 20.8 msec frame duration. Gold-Rabiner pitch extractor. Interpolation. (Software documented as Version 4-14-77)

PLPC at 2400 Bits per Second

Two bands; crossover point 20 db down at 2066 Hz. 10 Coefficients total (6, 4) 121 usec. sample rate with downsampling to 88 samples per frame, 21.3 msec frame duration. Cold-Rabiner pitch extractor. I nterpolation. (Software documented as Version 3-31-77)

Fig. 1. Salient parameters of the voice processor configurations.

-4-

In the real world it is more common for bit errors to occur in bursts or clusters. A random distribution of bit errors was judged to be a more universal case (among the many probability distributions that characterize different combinations of channels, modems, and conditions of the channel) but also a worst case, since the random distribution causes more serious degradation of intelligibility than one in which bit errors occur in clusters. The intelligibility data reported here are conservative, since the intelligibility under typical conditions of wire lines and radio channels in which bit errors are clustered, will probably be higher than the values reported here in which errors were randomly distributed.

2.1. Diagnostic Rhyme Test.

The intelligibility test recordings were based on Form IV of the Diagnostic Rhyme Test (DRT) of Voiers, Mickunas and Cohen, a test that provides both an overall intelligibility score and diagnostic data in the form of separate scores for the various intelligibility features. The test recordings used as input signals were prepared in an earlier program and were originally recorded in a quiet acoustic chamber using an Altec Model 659A dynamic microphone fixed in a close-talking configuration. (This microphone was chosen on a basis of uniform frequency response and low distortion, as well as minimum tendency for blasting effects in connection with the plosive sounds). Bit error conditions included zero errors, 1%, 3% and 5% bit error rates. Each condition was evaluated by processing DRT recordings from six male speakers (kept constant throughout the battery of tests), each speaker reading 192-word DRT lists in various scramblings.

Recordings of output speech resulting from this processing were subsequently presented diotically over headphones to listener crews of eight naive adults (i.e., unsophisticated with regard to voice processing technology); the listening tests were conducted in the ESD sound room located in the speech lab.

Recordings for evaluation of each bit error rate condition and each processor arrangement (LPC and PLPC) were presented to the listener crew on two different occasions, in a total of sixteen sessions spread over a two month period. (An analysis of variance indicated that the replications did not result in significant variations in test scores). The various findings reported here were derived from analysis of the diagnostic intelligibility data that resulted from analysis of listener responses in those sessions.

2.2. Analysis of variance.

Various subsets of the data were analyzed with three-way analysis of variance (processors, speakers, and bit error rates) to assess qualitatively the significance of differences between intelligibility scores. For overall intelligibility comparisons, each datum was a total DRT intelligibility score from a single listener; the eight listener scores and two presentations of the recorded test were treated as sixteen replications of the data. Intelligibility scores for the separate features voicing, nasality, sustention, sibilation, graveness, and compactness were each treated as a separate population of scores; in these cases, each datum was an average response of the eight listeners in a given session.

The data groupings were such that the total number of datum points in each of the cells in the analysis of variance was equal. Consequently any lack of homogeneity of variance could be expected to have only small effect on the outcomes of the analysis of variance test results.

Variance ratios were also used in testing for significant differences between slopes of regression lines in making comparisons of the processors, speakers, and intelligibility features in terms of their separate susceptibilities to effects of bit errors.

2.3. Tests of normality, and of equal variance.

The linear regression model is based on assumptions of normality and homogeneity of variance for the distributions of the dependent variable (in this instance, the intelligibility scores). Conformity with these assumptions was tested by means of Lilliefor's test (for conformity with a normal distribution) and Bartlett's test (for Homogeneity of variance) on various data groups consisting of total intelligibility scores, and scores for individual intelligibility features.

## 2.4. Paired intelligibility scores.

A useful method for assessing the significance of differences in intelligibility scores involves the pairing of scores and an assessment of the distribution of differences between the members of the pairs. In this instance the differences of interest were those between the scores for the LPC voice processor, and the PLPC voice processor, with the pairing representing a common speaker and bit error rate condition. The pairing tended to compensate for average differences between speaker scores, and average differences between scores for different bit error rate conditions, which would tend to conceal small differences in scores for the processor configurations.

The formulations of the various statistical tests are summarized in Appendix I.

#### 3.0. NARROWBAND VOICE PROCESSOR CONFIGURATIONS.

The two versions of linear predictive vocoders that were evaluated were nearly identical in most details, such as the total bandwidth of the voice signal, the sampling rate, the pitch extractor algorithm, and the duration of a data frame. The essential difference was that the conventional LPC algorithm used the linear predictive coding process to model the entire voice spectrum, as opposed to the division of the speech signal into frequency bands and modeling with separate linear predictive coding processes for each band, in the piecewise-LPC configuration. The version of PLPC used in these tests involved a low-frequency band and a highfrequency band, with a crossover point 20 db down at 2066 Hz. The technique involves a low-pass translation of the high band prior to performing the calculations on the data to solve the linear prediction equations. After transmitting LPC coefficients for each of the bands in a combined 2400 BPS data stream, the two bands are separately synthesized at the receiver, followed by a band-pass filtering operation that results in a correctly restored high-frequency band signal. The two bands are then added together to reconstruct the output speech. The method has been described by Roberts and Wiggins (1976).

This sequence of operations in the PLPC processor halves the sample rate involved in the calculations for solving the predictor coefficients (or reflection coefficients) in the speech analyzer, as well as reducing the total number of arithmetic operations in comparison with conventional LPC. In addition to these hardware benefits (for implementing PLPC), the piecewise-LPC method has the advantage of modeling a speech signal with improved accuracy (compared with conventional LPC) as well as providing a new dimension of flexibility for optimizing the assignment and coding of the LPC coefficients in order to derive maximum performance of the processor.

The PLPC configuration used in these tests involved six coefficients assigned to the low frequency band, and four for the high frequency band. There is evidence that the placement of the frequency bands, as well as the assignment and coding of the coefficients, could be refined to obtain further advantages in improving the intelligibility performance in comparison with the scores reported here for the 2400 BPS configuration. In any case, even without this refinement, it will be shown subsequently in this report that the PLPC processor gave higher intelligibility scores than conventional LPC, tending to confirm the hypothesis of improved spectrum modeling. Further refinements of the PLPC algorithm to take advantage of the additional degrees of freedom available for optimizing performance would be expected to further increase this advantage. 4.0. EFFECTS OF BIT ERRORS ON LPC-10 AT 2400 BITS PER SECOND.

Distributions of total DRT intelligibility scores at the four bit error rates are shown in Fig. 2. A detailed listing of total scores is given in Appendix H.

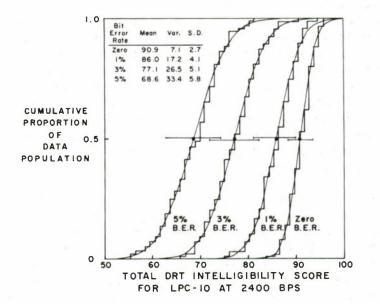


Fig. 2. Distributions of total intelligibility scores for LPC-10.

In these plots the scores have been ranked and plotted as cumulative proportions of the data set, at each of the four bit error rates. Normal ogives based on the calculated mean and standard deviation of each group of data are also shown. As there were six speakers, eight listeners, and two presentations of the test at each bit error rate, there were 96 values for each of the distributions. The Lilliefors test statistic indicated that in three of the four cases the data distributions were reasonable approximations to normal curves. The exception was the distribution for "zero error rate" condition, which indicated significant deviation from the normal ogive. Consequently the hypothesis of a normal distribution for the "zero bit error rate" group of total DRT scores obtained with the LPC-10 processor was rejected (a = .01). The point with excessive deviation occurred in connection with a score of 92.7, which showed a (normalized) deviation of 0.119; the critical value for p = .99 and n = 96 was 0.105.


-8-


Bartlett's test for homogeneity of variances indicated that the hypothesis of equal variances for these four distributions should be rejected (a = .001). However, in regard to the interpretation of analysis of variance tests on these data, Scheffe (1959) has pointed out that inequality of variances has much less importance (in biasing the results) when there are equal numbers of datum points in each "cell" of the data, a condition that was satisfied in these analyses.

These data were combined in calculating the linear regression model shown with the scatter plot of scores in Fig. 3. The regression line (the solid line in this figure) presents the expected relationship between total intelligibility scores and bit error rate, for the LPC-10 processor operating at 2400 BPS. The model yielded an estimated score of 90.7 (average score of six male speakers) for the origin of the regression line, corresponding to zero errors, and a negative slope of 4.45, i.e. the intelligibility on the average dropped 4.45 points for each percentage point increase in bit error rate. Standard significance tests (based on assumptions of normality and equal variance, conditions not fulfilled in these distributions) predict that the 95% confidence limits of the slope of the "true" regression line are -4.69 and -4.22. The value of  $r^2$ suggests that .778 of the variation in the total intelligibility scores was related to the variations in bit error rate.

The mean square deviation from the regression line was 20.96 for this data set. Using the standard error, confidence limits were calculated for the expected value estimated by the regression model, and confidence limits for the population of individual datum points. These estimates of predicted performance in the presence of bit errors are summarized in Table 1.

Since the data failed to fulfill the assumptions of normality and homogenous variances required for significance tests of the linear regression model, it was of interest to compare the values predicted by the model with actual values from the data distributions. This result is presented in Table 2. The expected values forecast by the model showed good agreement with average scores at the four bit error rates, estimating slightly lower scores than the actual data at zero bit error rate, and predicting scores slightly higher than those actually obtained at the 5% bit error rate condition. This pattern may be due to the truncation of the range of scores at 100%, or could possibly derive from the fact that the intelligibility drops off at high bit error rates more than a linear model predicts, i.e. that a non-linear model would be more appropriate. The comparison of the values exceeded by 97-1/2% of the datum points may also involve these factors, as well as a tendency for the variance of the intelligibility scores to show a negative correlation with mean scores.

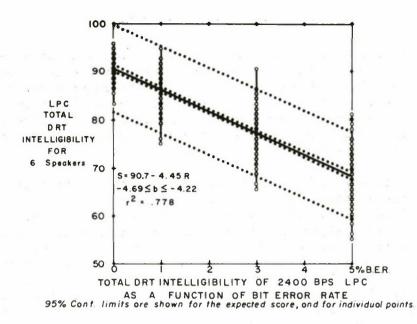



AVERAGE	NTELLIGIBILITY	ys. Bit Error	Rote, for 2	400 B	PS LPC-10	
Model:	S(LPC) = 90.66 -	4.454 (BER%)	(Bosed on	384	points)	

Bit	Totol		95% Confidence Limits				
Rote	Intelligibili		epected Avg. Score	Individuol	Points		
0	90.7		89.95 - 91.36	81.63 -	99.69		
	86.2		85.65 - 86.75	77.18 -	95.22		
2	81.7		81.28 - 82.21	72.73 -	90.76		
3	77.3		76.80 - 77.79	6 8.28 -	86.31		
4	72.8		72.22 - 73.46	63.81 -	81.86		
5	68.4		67.58 - 69.19	59.35 -	77.42		
6	63.9		62.92- 64.94	54.87 -	72.99		
7	59.5	Extrapolated	58.25- 60.70	50.39 -	68.56		
8	55.0	Values	53.57- 56.47	45.90 -	64.14		
9	50.6		48.89 - 52.25	41.41 -	59.72		
10%	46.1		44.20- 48.02	36.91 -	55.31		

Table I. Predicted Intelligibility performance of LPC-10 at 2400 bits per second in the presence of blt errors (with no provisions for error protection).

## COMPARISON OF PREDICTED AND ACTUAL SCORES: TOTAL INTELLIGIBILITY OF LPC-10 AT 2400 BPS WITH BIT ERRORS Regression Model: S = 90.7 - 4.45 R

Bit Error Rote	Expected (A	vg.) Score		ceeded by ipeaker/Listener iotions
	Regression Model	Actual Data	Regression Mode	Actual Data
ZERO	90.7	90.9	81.6	(All: low score 83.3
%	86.2	86.0	77.2	76.0
3%	77.3	77.1	68.3	68.8
5 %	68.3	66.7	59.4	56.3

Table 2. Comparison of actual intelligibility scores and scores predicted by the linear regression model, for LPC-10 at 2400 bits per second.

# 4.1. Susceptibility of scores for Intelligibility Features to bit errors: LPC-10 at 2400 bits per second.

Trends in scores of individual intelligibility features derived from the evaluations of LPC-10 processor performance with bit errors are summarized in Table 3. Scores for graveness, summarized in Appendix E, showed the greatest average susceptibility to bit errors, with a slope of -6.39 for overall scores for this feature. The scores for <u>sibilation</u>, presented in Appendix D, were at the other extreme, with an average regression slope of -2.45. Separate linear regression models for each state of these and the other intelligibility features, i.e. with the feature <u>present</u> and <u>absent</u>, <u>voiced</u> and <u>unvoiced</u>, etc. are presented in the Appendices, together with cumulative plots of the distributions of feature scores at the four bit error rates, and tables estimating the predicted intelligibility scores for the features over a range of bit error rates. The regression lines for average scores associated with the six features are compared in Fig. 4.

## LINEAR REGRESSION MODELS FOR LPC

Intelligibility Score vs. Bit Error Rate, at 2400BPS Form: DRT Score = a + b R, where R = B.E.R in percent

Intelligibility Feature	Regression Equation	95% Conf. Limits
VOICING	95.0 - 5.02 R	-6.37≤b≤ -3.67
NASALITY	98.6 - 3.73 R	-4.56≤ b≤ -2.91
SUSTENTION	83.8 - 5.70 R	-7.16≤b≤ -4.24
SIBILATION	88.3 - 2.45 R	-3.56≤ b≤ -1.34
GRAVENESS	83.1-6.39 R	-7.88 ≤ b≤ -4.91
COMPACTNESS	95.2 - 3.43 R	-4.38≤ b≤ -2.48
TOTAL Intelligibility	90.7 - 4.45 R	-4.69≤b≤ -4.22

Table 3. Summary of linear regression equations describing intelligibility scores for individual features, LPC-10 at 2400 BPS in the presence of bit errors.

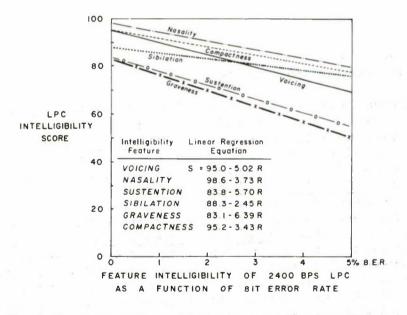


Fig. 4. Linear regression models for individual intelligibility feature scores for LPC-10 at 2400 BPS with bit errors.

ANALYSIS OF VARIANCE: SPEAKER DIFFERENCES

Comparison of Six Speakers: Regression Slopes far Totol DRT Intelligibility Score vs. Bit Error Rote

with 2400 8PS	LPC-10		
Source of Variation	<u>d. f.</u>	Sum of Squores	Meon Squore
Deviations fram Regress	ian		
Six Speakers	372	4762.754	12.803
Pooled	372	5189.617	13.950
Diff. in slopes	5	426.863	85.373

Testing H<sub>o</sub>: No difference in slopes, F =  $\frac{85.373}{12.803}$  = 6.668 \*\*\* Reject H<sub>o</sub>


Table 4. Analysis of variance results comparing the regression slopes for total intelligibility scores of individual speakers, LPC-10 at 2400 BPS with bit errors.


4.2. Susceptibility of Intelligibility Scores of individual Speakers to bit error effects: LPC-10 at 2400 BPS.

Linear regression models based on intelligibility scores reflecting the performance obtained with individual speakers were calculated in addition to the regression model for composite performance of all speakers. The regression slopes obtained from these analyses were tested for the hypothesis: no significant difference among slopes for speakers. This result is summarized in Table 4 and Fig. 5. The hypothesis: no difference between the regression slopes estimated for individual speakers, was rejected (a = .001).

Scores for Speaker CH, a speaker who customarily obtains the highest intelligibility scores among this group, resulted in a regression line above the other speakers, and at all points more than 2 points above the next highest, obtained with Speaker BV. Speaker JE, a speaker whose scores are consistently at the bottom of the range, resulted in the lowest regression line and the greatest slope, -5.35.

The Lilliefors test indicated that distributions for total DRT scores of each of the six speakers were reasonable approximations to normal distributions.

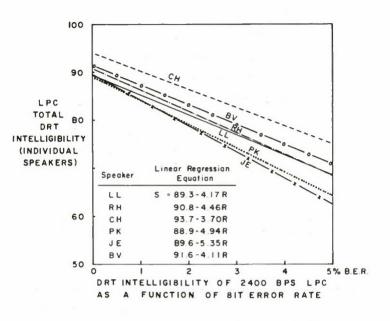



#### 5.0. EFFECTS OF BIT ERRORS ON PLPC AT 2400 BITS PER SECOND.

Distributions of total DRT intelligibility scores obtained with the PLPC processor operating at 2400 BPS at the four bit error rates are shown in Fig. 6. A detailed listing of total intelligibility scores is presented in Appendix H.

The Lilliefors test statistic indicated that three of the four bit error rate conditions resulted in intelligibility scores that were reasonable approximations to normal distributions. The exception was the distribution for the 1% bit error rate condition; for this case the test indicated significant deviation from a normal curve, and the hypothesis of conformity with a normal curve was rejected (a = .01). The point with excessive deviation corresponded to a total DRT score of 90.62, with a (normalized) deviation of 0.122; the critical value for p = .99 and n = 96was 0.105. Bartlett's test for homogeneity of variances indicated that the hypothesis of equal variances should be rejected (a = .001). These data followed the usual trend in intelligibility scores, with variance tending to increase with a drop in scores.

-14-



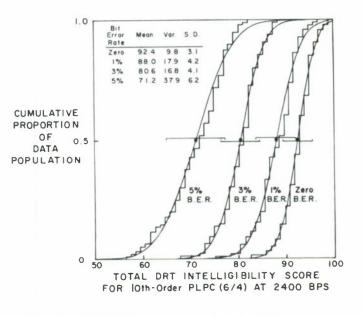


Fig. 6. Distributions of total intelligibility scores for Piecewise Linear Predictive Coding (PLPC).

The linear regression model calculated for total intelligibility scores associated with the PLPC processor is presented in Fig. 7 in relation to the scatter plot of scores. The model estimated a score of 92.5 (six-speaker average score) for the origin of the regression line (zero bit errors) and a slope of -4.18. The standard significance tests estimated that the 95% confidence limits of the "true" regression slope were from -4.42 to -3.95. A comparison of the scores predicted from the regression model and the actual data values is made in Table 6. As with the scores for LPC-10, there was good agreement between the values estimated by the model and the actual data values, even though the data distributions violated some of the underlying assumptions of the model. The comparison exhibits the same trends as the LPC-10 data, in which the predicted values are higher than the actual data, at the 5% bit error rate.

-15-

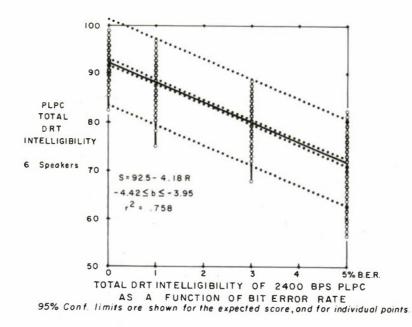



## AVERAGE INTELLIGIBILITY vs. Bit Error Rate for 2400 BPS PLPC Model: S(PLPC) = 92.46 - 4.184(BER%) (Bosed on 384 points)

Bit	Totol		9	5% Confide	nce Limits	
Error Rate	Intelligibi	lity Ex	pected	Avg. Score	Individual	Points
0	92.5		91.75	- 93.16	83.49-	101.42
1	88.3		87.73	- 88.81	79.31-	97.23
2	84.1		83.63	- 84.55	75.13-	93.04
3	79.9		79.41	- 80.39	70.95-	88.85
4	75.7		75.10	- 76.33	66.76-	8468
5	71.5		70.74	- 72.33	62.56 -	80.51
6	67.3		66.35	- 68.35	58.35 -	76.34
7	63.2	Extrapolated	61.95	- 64.38	54.14 -	72.19
8	59.0	Values	57.54	- 60.42	49.93 -	68.03
9	54.8		53.13	- 56.46	45.70 -	63.89
10%	50.6		48.71	- 52.51	41.47 -	59.75

Table 5. Predicted intelligibility performance of PLPC at 2400 bits per second in the presence of bit errors (with no provisions for error protection).

	COMPARISON	OF PF	REDICTE	DANDA	CTUA	L SCO	RES		
TOTAL	NTELLIGIBILIT	YOF	PLPC	AT 2400	8PS	WITH	8IT	ERRORS	
	Regression	Model	: S = 92	.5 - 4.18	R				

Bit Error Rate	Expected (Avg.) Score		Score Exce 97-1/2% of Spe Combinot	oker/Listener
	Regression Madel	Actual Data	Regression Madel	Actual Data
ZERO	92.5	92.4	83.5	85.4
1 %	88.3	88.0	79.3	80.2
3%	79.9	80.6	71.0	72.9
5%	71.5	71.2	62.6	58.3

Table 6. Comparison of actual intelligibility scores and scores predicted by the linear regression model, for PLPC at 2400 bits per second.

#### 5.1. Susceptibility of scores for Intelligibility Features to bit errors: PLPC at 2400 bits per second.

Linear regression equations representing the average trends in scores for the individual intelligibility features are summarized in Table 7. The analysis indicated a pattern of susceptibility to bit errors similar to that obtained with LPC-10, in which the scores for the feature graveness with an average slope of -5.75 indicated the greatest susceptibility, scores for <u>sibilation</u> with an average slope of -3.35 evidencing the least susceptibility. Regression lines for average scores for the six principal features are compared in Fig. 8. Detailed listings of scores for the separate features and cumulative distributions are presented in the Appendices, as well as tables predicting feature scores over a range of bit error rates.

-17-

LINEAR	REGRESSION	MODELS	FOR	PLPC

Intelligibility Score vs. Bit Error Rate, at 2400 BPS

Form: DRT Score =	a + b R, where R - b.c	.R.in percent
Intelligibility Feature	<b>Rearession</b> Equation	95% Conf. Limits

interrigibility rearded	regression Equation	So to com. Emilie
VOICING	96.3 - 3.63 R	-4.66 ≤ b ≤ - 2.55
NASALITY	98,3 - 3.65 R	-4.48 ≤ b≤ - 2.83
SUSTENTION	84.1 - 4.91 R	-6.33 ≤ b≤ - 3.50
SIBILATION	95.6 - 3.35 R	-4.10≤ b≤ - 2.60
GRAVENESS	85.3 - 5.75 R	-7.34 ≤ b≤ - 4.15
COMPACTNESS	95.1 - 3.82 R	-4.87 ≤ b≤ -2.77
TOTAL Intelligibility	92.5 - 4.18 R	-4.42 ≤ b≤ -3.95

Table 7. Summary of linear regression equations describing intelligibility scores for individual features, PLPC at 2400 BPS in the presence of bit errors.

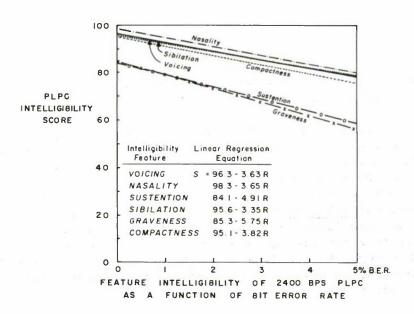


Fig. 8. Linear regression models for individual intelligibility feature scores for PLPC at 2400 BPS with bit errors.

#### 5.2. Susceptibility of intelligibility scores of individual Speakers to bit error effects: PLPC at 2400 bits per second.

Total DRT intelligibility scores obtained with each of the six speakers tested in combination with the PLPC processor were utilized in separate calculations of linear regression models, tests for normality of the distributions of scores, and for equal variances. An analysis of variance testing the hypothesis of no difference in slopes of the regression lines of the six speakers indicated that the hypothesis of equal regression slopes should be rejected (a = .001). This finding is summarized in Table 8.

Linear regression models based on total scores for each of the six speakers in tests of PLPC are presented in Fig. 9.

#### ANALYSIS OF VARIANCE: SPEAKER DIFFERENCES

Comporison of Six Speakers: Regression Slopes for

Totol DRT Intelligibility Score vs. Bit Error Rote

with	2400	BPS	Piecewise	- LPC
------	------	-----	-----------	-------

Source of Voriotion	<u>d.f.</u>	Sum of Squores	Meon Squore
Deviations from Regress	ion		
Six Speakers	372	4642.071	12.479
Pooled	372	5487.151	14.750
Diff. in slopes	5	845.081	169.016

Testing H<sub>\*</sub>: No difference in slopes, F =  $\frac{169.016}{12.479} = 13.544^{\frac{3}{2}\frac{3}{2}}$ Reject H<sub>\*</sub>

Table 8. Analysis of variance results comparing the regression slopes for total intelligibility scores of individual speakers, PLPC at 2400 BPS with bit errors.

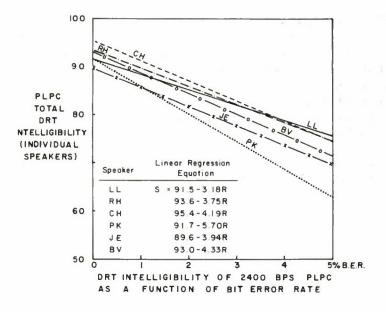


Fig. 9. Linear regression models for individual speaker's total intelligibility scores vs. bit error rate, for PLPC at 2400 BPS.

#### 6.0. COMPARISONS OF PERFORMANCE OF LPC AND PLPC OPERATING AT 2400 BITS PER SECOND IN THE PRESENCE OF BIT ERRORS.

A variety of statistical tests were performed on the speech intelligibility scores to test the hypothesis that the LPC and PLPC processor configurations differed significantly in terms of speech intelligibility performance.

6.1. Analysis of variance findings.

Results of a battery of three-way analysis of variance tests are summarized in Tables 9.1 and 9.2; the three-way classification was by processors, speakers and bit error rates. Detailed summaries with sums of squares, mean squares, and variance ratios are given in the Appendices, together with the data tables that were the basis for these results.

	SIGNIFIC	ANT DIFFERE	NCES
INTELLIGIBILITY	PROCESSORS	SPEAKERS	Bit Error Rotes
FEATURE	(LPC & PLPC)	(6 Males)	(Four BER's)
VOICING	## (p=.997)	### (p+.999)	*** (p=.999)
Present	### (p=.999)	H## (p+.999)	*** (p*.999)
Abseni		HHH (p+.999)	*** (p=.999)
NASALITY			### (p=.999)
Present	<pre>★ (p = .954)</pre>	*** (p=.999)	### (p+.999)
Absent		### (p=.999)	*** (p = .999)
SUSTENTION		*** (p+.999)	*** (p= .999)
Voiced	* (p=.988)	*** (p=.999)	*** (p=.999)
Unvoiced		*** (p=.999)	*** (p=.999)
SIBILATION	### (p=.999)	*** (p+.999)	44* (p=.999)
Voiced	## (p=.998)	₩¥ (p=.997)	*** (p=.999)
Unvoiced	*** (p=.999)	*** (p=.999)	*** (p= .999)
GRAVENESS	¥ (p=.985)	* (p=.988)	HHH (p=.999)
Voiced	₩ (p=.961)		### (p = .999)
Unvoiced		** (p=.998)	₩₩₩ (p°.999)
COMPACTNESS		*** (p=.999)	++++ (p=.999)
Voiced		*** (p=.999)	### (p=.999)
Unvoiced		<del>***</del> (p+.999)	*** (p=.999)
TOTAL INTELLIGIBILITY	*** (p=.999)	### (p+.999)	жжж (p=.999)

#### THREE- WAY ANALYSIS OF VARIANCE: SUMMARY OF RESULTS OF COMPARING 2400 BPS LPC AND PLPC INTELLIGIBILITY SCORES

Table 9.1. Three-way analysis of variance results comparing intelligibility scores for LPC-10 and PLPC at 2400 BPS in the presence of bit errors.

The analysis of variance was predicated on a fixed-effects model, from a rationale that the six speakers were common to the entire battery of tests, as were the majority of the listener crew. A case can also be made for a mixed-effects model, from the reasoning that the random bit error effects involved successive samplings of a randomly distributed variable. The tables of mean squares listed in the Appendices are provided in order to permit the option of calculating significance tests from this alternative point of view.

The analysis of variance indicated that about half of the intelligibility scores for individual features, as well as the total scores, evidenced significant differences between the LPC and PLPC processor configurations. All of the feature scores showed significant differences due to bit error rate conditions, and nearly all were characterized by significant differences between the six speakers. The analysis of variance also revealed that significant interactions between processors and speakers were present for the majority of the intelligibility features, as well as total intelligibility scores. The total scores, and a few feature scores, showed significant interactions between speakers and bit error rates, and between processors and bit error rates. These results are summarized in Table 9.2.

A further group of tests were conducted on total intelligibility scores at each of the four bit error rates, testing the significance of the difference in mean scores for the LPC and PLPC processors. These results are summarized in Table 10.

	SIGNIFICANT INTERACTIONS				
INTELLIGIBILITY FEATURE	Processors ond Speakers	Processors and Bit Errar Rates	Speakers and Bit Error Rates		
VOICING	¥ (p=.956)				
Present Absent	*** (p=.999)	*** (p=.999)	<del>XXX</del> (p≈.999)		
NASALITY	++++ (p=.999)				
Present	HHH (p=.999)		*** (p=.999)		
Absent	** (p=.990)		### (p=.999)		
SUSTENTION	¥¥ (ρ = .9 93)				
Voiced	+ (p=.977)	¥ (p=.979)	## (p=.995)		
Unvoiced	## (p=.998)		₩(p=.965)		
SIBILATION	(p= .996)				
Voiced	## (p = .996)				
Unvoiced	*** (p=.999)				
GRAVENESS					
Voiced					
Unvoiced					
COMPACTNESS					
Voiced	** (p=.995)				
Unvoiced	+++ (p=.999)	<del>**</del> (p×.994)			
TOTAL INTELLIGIBILITY	HHH (p=.999)	# (p=.974)	### (p=.999)		

#### THREE- WAY ANALYSIS OF VARIANCE: SUMMARY OF RESULTS OF COMPARING 2400 BPS LPC AND PLPC INTELLIGIBILITY SCORES

Table 9.2. Significant interactions revealed in the three-way analysis of variance summarized in Table 9.1.

	LPC	PLPC	(1) Diff.	F with I & 165 d	( <b>#</b> )
Zero Bit Errors	90.92	92.39		21.638 <sup>***</sup>	
۱%	85.98	88.01	2.03	20.822***	(p>.999)
3%	77.08	80.58	3.49	44.360 <sup>***</sup>	(p>.999)
5%	68.55	71.18	2.63	18.443 <sup>***</sup>	(p>.999)

## COMPARISON OF MEAN INTELLIGIBILITY SCORES Six Speakers, Two Replications, per Condition

(1) Differences in avg. scores were significant at the .001 level.

Table 10. Comparison of total DRT intelligibility scores obtained with LPC-10 and with PLPC at each bit error rate condition.

Differences between mean intelligibility scores (six speakers) for the LPC and PLPC processors, although small, were highly significant at each bit error rate condition. Distributions of the total scores at each bit error rate condition are compared in Figs. 10 through 13, with the normal ogive based on the mean score and standard deviation of the data in each distribution shown for comparison. In every case, the piecewise-LPC processor obtained a higher intelligibility score than the conventional LPC processor configuration.

-23-

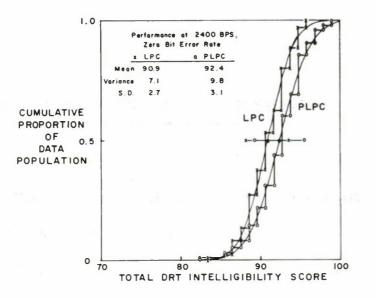


Fig. 10. Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with zero bit error rate.

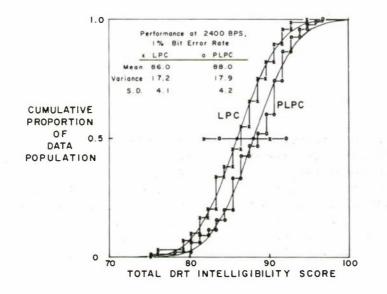


Fig. 11. Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with 1% bit error rate.

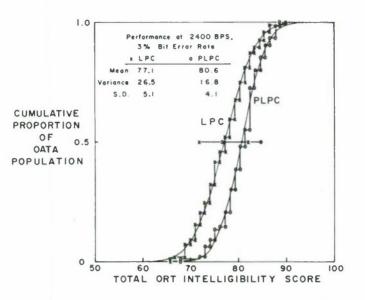




Fig. 12. Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with 3% bit error rate.

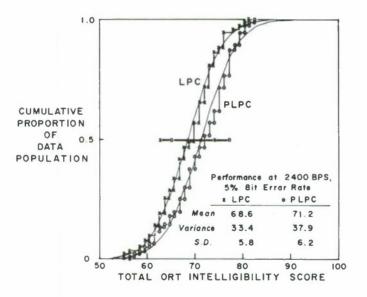


Fig. 13. Comparison of distributions of total DRT intelligibility scores for LPC and PLPC at 2400 BPS with 5% bit error rate.

-25-

### 6.2. Pairwise comparison of intelligibility scores.

The intelligibility scores for LPC and PLPC processor configurations were further compared through a pairwise comparison of scores. The pairing involved an LPC intelligibility score, and a PLPC score, for a common speaker and bit error rate condition. The distribution of differences in scores, between the members of the pairs, was utilized in testing for the significance of the average difference between the performance of the LPC and the PLPC processors, over all bit error rate conditions and speakers. The pairing had the effect of normalizing against variance due to speaker effects and bit error effects that would otherwise tend to mask out the significance of small differences between the performance of the processors. Cases in which the score for the LPC processor was significantly better than the PLPC processor are shown in Table 11.1; cases showing a significant advantage for PLPC in Table 11.2.

### COMPARISONS OF LPC AND PIECEWISE-LPC AVERAGE INTELLIGIBILITY SCORES Zero, 1%, 3% and 5% Bit Error Rates at 2400 BPS PART I. SIGNIFICANT DIFFERENCES FAVORING LPC

INTELLIGIBILITY FEATURE	FEATURE	FEATURE	FEATURE
VOICING (Avg)	-	-	-
Frictional	-		-
Non - Frictional	-	5.08	-
NASALITY (Avg.)	1	_	-
Grove	-	-	-
Acute	-	-	-
SUSTENTION (Avg.)	-	_	-
Voiced	-	-	-
Unvoiced	-	-	-
SIBILATION (Avg.)	-	· _	-
Voiced	-	-	-
Unvoiced	-	-	-
GRAVENESS (Ave)	-		
Voiced	-	-	-
Unvoiced	-	. –	<u>-</u>
COMPACTNESS (Avg.)	3.22	1.2	_
Voiced	4.43	-	-
Unvoiced	-	-	-

### Table II.I. Results of pairwise-comparison of LPC and PLPC intelligibility scores: Differences favoring LPC-10.

### COMPARISONS OF LPC AND PIECEWISE-LPC AVERAGE INTELLIGIBILITY SCORES Zero, 1%, 3% and 5% Bit Error Rates at 2400 BPS

PART 2.	SIGNIFICANT	DIFFERENCES	FAVORING	PIECEWISE - LPC

FEATURE	FEATURE	ABSENT	FEATURE
VOICING (Avg.)	10.91***	_	4.49**
Frictional	8.79***	_	5.01 **
Non - Frictional	13.02**	-	-
NASALITY (Avg)	-	-	-
Grove	5.14**	-	-
Acute	-	-	-
SUSTENTION (Avg.)	-	-	-
Voiced	-	6.19*	5.11*
Unvaiced	-	-	-
SIBILATION (Avg)	9.99	1	5.21
Voiced	12.57 ***	-	5.18**
Unvoiced	7.42 <sup>RR</sup>	3.06	5.24 ***
GRAVENESS (Avg )	-	7.00	3.66
Voiced	-	-	3.06
Unvoiced	-	11.85	4.26 *
COMPACTNESS (Avg.)	_	-	-
Voiced	-	-	-
Unvoiced	-	-	-
OTAL ORT INTELLIGIBI	LITY SCORE:	2.41	

Table 11.2. Results of pairwise-comparison of LPC and PLPC intelligibility scores: Differences favoring PLPC.

As there are nine cases associated with each of the intelligibility features, i.e. three scores when the feature was present (for example, <u>voiced</u>, <u>unvoiced</u>, and total of voiced and unvoiced cases), three for the feature <u>absent</u>, and three for the total cases for <u>present</u> and <u>absent</u>, a total of 54 diagnostic intelligibility scores are involved in the total summary, plus a total score for overall intelligibility. Thus the results of the pairwise tests represented 55 separate assessments resulting in a detailed listing of salient differences of intelligibility performance for the two processors. In approx. two-thirds of these cases, the difference was not statistically significant. The significant differences, shown in these tables, included three cases favoring LPC, and twenty

-27-

cases, as well as the overall intelligibility scores, showing a significant bias favoring the PLPC processor.

6.3. Comparison of regression slopes: LPC and PLPC total DRT intelligibility scores vs. bit error rate.

Further comparisons of the LPC and PLPC total intelligibility scores were made in comparing their susceptibilities to bit errors as estimated by the slopes of the regression lines relating intelligibility and bit error rate. An analysis of variance was made to test the hypothesis: no difference in regression slopes. The test was performed with the composite data for all six speakers; separate tests were also made comparing the regression slopes calculated for LPC and PLPC on a speaker-by-speaker basis.

The results of testing the composite data are shown in Table 12.1. (The basis of the test is summarized in Appendix I.) The difference between the regression slope calculated for the LPC processor scores (-4.45) and the slope calculated for the PLPC scores (-4.18) was not significant, either in the original data or after an adjustment for differences in speaker means. However, comparing the LPC and PLPC regression lines, speaker by speaker, it was revealed that the scores for four of the six speakers showed a significant advantage for the PLPC processor. The difference in slopes for the remaining two speakers was not significant. This result is summarized in Table 12.2.

ANALYSIS OF VARIA	NCE	PROCESSOR DIFFI	ERENCES
Comporing 2400 BPS LPC	ond	Piecewise - LPC Re	egression Slopes
for Tatal DRT Intellig	ibility	Scare vs. Bit Er	ror Rate
Source of Vorionce	<u>d. f.</u>	Sum of Squores	Meon Squore
Deviations from Regression			
Processors(LPC & PLPC)	764	15902.556	20.815
Pooled	764	15953.429	20.882
Diff. in slopes	1	50.873	50.873
Testing Ho: Na difference	in slo	pes, $F = \frac{50.873}{20.815} = 2$ .	444 (p=.882)
Adjusted far Speaker differe	nces:		
Deviations fram Regression			
Processors (LPC & PLPC)	764	11201.151	14.661
Pooled	764	11252.801	14.729
Diff. in slopes	1	51.650	
Testing Ho: No difference	in slo	pes, F = <u>51.650</u> = 3. 14.661 = 3.	.523 (p=.939)

Table 12.1. Analysis of variance summary comparing linear regression slopes: total DRT intelligibility scores for LPC-10 and PLPC. (All speakers).

AI	NALYSIS OF	VARIANCE	PROCESSOR	DIFFERE	NCES	
Comp	oring 2400 BPS	<u>LPC</u> and	Piecewise -	LPC Regre	ssian Slape	25
by L	ndividual Speake	rs' Totol Inte	elligibility Sco	re vs. <u>Bit</u>	Error Rate	
	Testing He : N	o difference	in slopes			
SPEAKE		slape	F = Variance	ratia (with	I and 124	d.f.)
	LPC	PLPC				
LL	-4.17	-3.18	9.117**	(p = .997)	REJECT	H.
RH	- 4.46	-3.75	4.552*	(p • .965)	REJECT	H.
СН	- 3.70	-4.19	3.756	(p = .945)		
PK	-4.94	-5.70	4.355*	(p=.961)	REJECT	H.
JE	-5.35	-3.94	16.818 ***	(p=.999)	REJECT	H.
Bv	-4.11	-4.33	0.459			

Table 12.2. Analysis of variance results comparing linear regression slopes, total Intelligibility scores for LPC-10 and PLPC, by individual speakers.

### 6.5. Comparisons of regression slopes: intelligibility feature scores for LPC and PLPC processors, vs. bit error rate.

Tests of the scores for individual intelligibility features revealed that the majority of the distributions of feature scores at the various bit error rates failed to meet the requirements of being normally distributed, and of equal variances at the various bit error rates. Significance tests of the regression data are therefore in question; however, the results of these tests may have value in contributing to understanding of the nature and degree of difference in intelligibility performance of the LPC and PLPC processors in the presence of bit errors.

Detailed tables of regression equations and estimates of the 95% confidence limits for the slopes for the various feature scores are contained in Appendix G; tables comparing the feature scores predicted by the regression models, and the actual data, are also presented. A portion of this data was examined in analysis of variance tests of the difference in regression slopes for the LPC and PLPC processor scores. The results are presented in Table 13. Of the eighteen cases that were tested, eleven showed a smaller slope for the PLPC scores, i.e. estimated

smaller susceptibility to bit errors. Seven of the comparisons showed the opposite bias, favoring LPC. However, the variance ratios did not exceed the critical value in any of these tests; as a result, the hypothesis of no difference in regression slopes was not rejected. Speaker variability, and the smaller number of datum points involved in these comparisons, were factors that influenced this outcome.

Testin	H.	No difference	in s	lopes	
INTELLIGIBILITY		b = SLOPE	F	(d.f.)	P
FEATURE	LPC	PLPC			,
VOICING (Avg.)	- 5.02	- 3.63	2.611	(1,380)	0.893
Frictional	- 4.41	- 3.58	0.549	(1,188)	
Non - Frictional	- 5.63	- 3.67	2 306	(1, 188)	0.869
NASALITY (Avg.)	- 3.73	- 3.65	0.019	(1, 380)	
Grove	- 4.01	- 3.57	0.252	(1, 188)	
Acute	- 3.46	- 3.74	0.126	(1,188)	
SUSTENTION (Avg.)	- 5.70	- 4.91	0.585	(1,380)	
Voiced	- 7.19	- 4.45	3 2 06	(1, 188)	0 925
Unvoiced	- 4 21	- 5 37	0.894	(1, 188)	
SIBILATION (Avg.)	- 2.45	- 3.35	1.772	(1,380)	0.816
Voiced	- 2.30	- 2.61	0.119	(1,188)	
Unvoiced	- 2.60	-4.09	2.195	(1,188)	0.860
GRAVENESS (Avg.)	- 6 39	- 5.75	0.346	(1,380)	
Voiced	- 5.26	- 4.91	0.151	(1, 188)	
Unvoiced	- 7.53	-6 58	0.501	(1,188)	
COMPACTNESS (Avg.)	- 3.43	-3.82	0.291	(1, 380)	
Voiced	- 2.48	- 1.98	0.583	(1, 188)	
Unvoiced	- 4.38	- 5.66	1.529	(1, 188)	0.782

### Intelligibility Feoture Scores vs. Bit Error Rote

Accept Ho: No difference in regression slopes

Table 13. Comparison of linear regression slopes derived from individual intelligibility feature scores, for LPC-10 and PLPC.

### 7.0. DISCUSSION OF FINDINGS.

Tables of intelligibility scores for the various features, cumulative plots of the distributions of scores, and scatter diagrams shown in relation to linear regression lines are presented in the Appendices. Some of the salient findings from analysis of this data are presented in the following paragraphs.

The Lilliefors test, described in Appendix I.2., indicated that the hypothesis of a normal distribution of scores should be rejected for a majority of the data groupings of intelligibility scores for individual intelligibility features. Deviation from a normal distribution appeared to derive from three primary causes, singly or in combination: (1) truncation of the range of scores at 100%; (2) significant differences among mean scores for individual speakers; and (3) significant differences among mean scores for the feature states, e.g. the <u>Voicing</u> scores included <u>Voicing Present</u> (frictional and non-frictional) and <u>Voicing Absent</u> (frictional and non-frictional), etc. Total intelligibility scores, representing the summation of these effects, were better approximations to normal curves, as reported in earlier sections of this report.

Even with these departures from the assumptions underlying the linear regression model, the expected feature scores predicted by the regression models for the features on the whole agreed well with the actual data; these comparisons are presented in Appendix G.5.

The distributions of intelligibility scores were also characterized by a tendency to show a significant negative correlation between mean scores and variance associated with the distributions (as has been found generally in intelligibility testing). In many cases, the assumption of homogeneity of variance required for the linear regression model tests of significance was not fulfilled in the data. A result of these distortions (relative to the model) was a tendency for the confidence limits predicted by the model to be conservative at zero bit error rate: most or all of the data values were above the lower 95% confidence limit for individual scores. However, at the upper end of the range (5% bit error rate) the model was overly optimistic: a larger percentage of datum points were below the confidence limit than predicted by the model. The overall scores for LPC-10 illustrate this trend: at zero bit error rate, all of the scores were above the lower 95% limit estimated by the model. At the 5% bit error rate, almost 10% of the datum points were outside the 95% limits estimated for individual points, an equal number of points occurring above and below the limits. Total intelligibility scores including all bit error rates showed a remarkable "global" agreement with the model, however, in that 19 out of 384 points (4.9%) were distributed outside the 95% limits for individual datum points

estimated by the regression models, with each processor's scores (LPC and PLPC).

These departures from the assumptions that underly the linear regression model must be kept in mind in interpreting the various results of significance tests on the linear regression data, in particular the estimates for 95% confidence limits for slopes of the regression lines, and 95% confidence limits that have been estimated for predicting distributions of individual scores at different bit error rates. Lacking for the present any data base or alternative method for estimating these limits with greater reliability, these data are presented in order to provide estimates for the values.

7.1. Comparison of LPC and PLPC processor algorithms.

There were no special provisions in the LPC and PLPC processor algorithms involved in these tests that were specifically designed to alleviate the effects of bit errors: provisions such as optimum placement of bits in the data frame, smoothing of the parameters prior to speech synthesis, error detection and correction, etc, techniques known to be of value in minimizing effects of bit errors on speech intelligibility and quality. The purpose here was to assess and compare the intrinsic vulnerability of the LPC and PLPC speech processing algorithms to bit errors, and to perform a definitive test of the hypothesis that the inherent redundancy and improved spectral modeling provided by the PLPC approach improve the intelligibility of the speech signals from a PLPC-based processor design, in comparison with a conventional LPC design, with and without bit error effects.

The test results provided clear confirmation of this hypothesis. Although the numerical value of the difference in performance was in most cases small, its statistical significance was confirmed in numerous tests.

Error detection and correction, and other special coding schemes to reduce effects of bit errors can of course improve the performance of a conventional LPC processor terminal in comparison with these results for which no such provisions were present. However, these test results suggest that the application of these schemes to the PLPC algorithm should in every case provide more beneficial results in improving speech intelligibility and quality than when applied to the LPC algorithm, other things being equal. This conclusion stems from the basic advantages of the piecewise linear predictive coding method that have been previously cited: better spectral modeling derived from the piecewise approach, and segregation of bit error effects involving LPC coefficients to only a portion of the output speech spectrum, rather than the entire spectrum as happens with conventional LPC.

As a further consideration, the PLPC algorithm used in these tests was not an optimum design. There is considerable evidence that changes in the combination of frequency bands and the coding of the coefficients could lead to a further increment of improvement in the performance attained in connection with the PLPC algorithm: refinements that are possible with the PLPC configuration because of the additional degree of freedom provided with the use of multiple frequency bands. These changes would be minor in terms of hardware and software, but have a high probability of leading to significant results in improving the performance in both the error-free condition and in the presence of bit errors. Similar considerations are involved in connection with the acoustic noise problem: the separation of the speech signal into frequency bands affords an additional degree of flexibility in refinement of the algorithm to combat effects of acoustic noise.

Some details of the contrasts in intelligibility scores for the various intelligibility features are described in the following paragraphs.

A comparison of the data distributions of intelligibility scores for Voicing Present in comparison with Voicing Absent obtained with the LPC processor revealed that the difference in susceptibility to bit errors (as estimated by the regression slopes) was significant only for the non-frictional sounds, involving voiced and unvoiced initial stop consonants. Here the regression slope was -8.12 for Voicing Present, and -3.14 for Voicing Absent. Although in this case the unvoiced sounds were not as susceptible to bit errors as the voiced sounds, the reverse was true in the case of the voiced and unvoiced states associated with the features Graveness and Compactness, as will be described in the discussion of those features. The test words and intelligibility data for the Voicing feature are presented in Appendix A; a complete table of regression equations relating intelligibility scores with bit error rate for the various intelligibility feature states is presented in Appendix G.

In the case of intelligibility scores for the PLPC processor, the difference in regression slopes for <u>Voicing Present</u> vs. <u>Voicing Absent</u> was significant for both the <u>frictional</u> case (a = .05) and the <u>non-frictional</u> case (a = .001).

Intelligibility scores for the <u>Nasality</u> feature, listed in Appendix B, indicated that neither the contrast between <u>Nasality Present</u> and <u>Nasality Absent</u>, or the contrast between <u>Nasality(Grave</u>) and <u>Nasality(Acute</u>) evidenced significant differences in values of the regression slope in the case of performance data for the LPC processor. However, the distributions of scores for the PLPC processor showed a significant difference between the regression slopes for <u>Nasality Present</u> (b = -2.58) and Nasality Absent (b = -4.73) at the level a = .01.

The test words and intelligibility scores for the <u>Sustention</u> feature are listed in Appendix C. Scores obtained with the LPC processor indicated that the regression slope for <u>Sustention(Voiced)</u> scores with b = -7.19 was significantly greater than that for <u>Sustention(Unvoiced</u>) with b = -4.21, at the level a = .05. However, this contrast was not significant in the case of intelligibility scores for the PLPC processor. The contrast between regression slopes for <u>Sustention Present</u> and <u>Sustention Absent</u> intelligibility scores was not significant for either the LPC processor or the PLPC processor, suggesting that on the average the sustained and the abrupt consonants were equally vulnerable to the effects of bit errors.

Data for the <u>Sibilation</u> feature scores are presented in Appendix D. These distributions indicated that no significant difference in susceptibility to bit errors was present for the contrast between this feature being <u>present</u> and <u>absent</u>, or for the contrast between the <u>voiced</u> and <u>unvoiced</u> states of <u>Sibilation</u>, with either LPC or PLPC intelligibility scores.

Details of <u>Graveness</u> intelligibility scores are shown in Appendix E. The data analysis indicated that there was no significant difference in susceptibility to bit errors for the feature <u>Graveness Present</u> contrasted with <u>Graveness Absent</u>, for either the LPC or the PLPC processor scores. However, the LPC processor scores revealed a significant difference in regression slopes for <u>Graveness(Voiced)</u> with b = -5.26, in comparison with <u>Graveness(Unvoiced)</u> with b = -7.53, at the level a = .05. This contrast was not significant in the case of the distributions of scores for the PLPC processor; however, a similar bias was observed, i.e. the <u>unvoiced</u> state of <u>Graveness</u> displayed a greater susceptibility to bit errors than the voiced state.

-34-

The distributions of intelligibility scores and other data for the <u>Compactness</u> intelligibility feature are presented in Appendix F. These scores showed a pattern similar to that obtained with the scores for <u>Graveness</u>, in that the <u>unvoiced</u> state of the feature exhibited a greater vulnerability to bit errors than the <u>voiced</u> state, in the case of scores for both the LPC and the PLPC processors. However, as with the <u>Graveness</u> feature, the contrast was significant for the LPC processor scores (a = .05) but not significant for the PLPC processor. The contrast between <u>Compactness Present</u> and <u>Compactness Absent</u> regression slopes was not significant for either processor. 7.2. Implications for Digital Voice Terminal Hardware Development.

The magnitude of improvement in speech intelligibility obtained by using the piecewise linear predictive coding method in preference to conventional LPC is sufficiently small that it would be difficult to justify choosing PLPC hardware and software for a voice terminal design if there were premium hardware costs incurred by using PLPC rather than LPC. However, the nature of the PLPC algorithm is such that a voice terminal based on this approach could reasonably be expected to cost less, not more, than an LPC design. The basis for this conclusion is that the PLPC algorithm operates at half the sample rate of LPC, for performing the speech analysis and synthesis functions. The PLPC algorithm also requires less computation: fewer multiplications and fewer additions, than conventional LPC (this is assuming that the filtering operations at the input and output are done with hardware filters or with CCD, rather than by digital filtering operations). Inevitably these factors should cause a PLPC-based voice terminal to be cheaper and/or more cost effective than an LPC-based design. For example, the reduced computational load would free up computational capacity in the processor to be available for modem functions, signalling and supervision, error correction and detection, acoustic noise reduction algorithms, etc.

These advantages would carry over to a wideband version of PLPC operating at 8.0 or 9.6 Kbps, with a residual (error) signal representing the difference between the linear predictive model and the actual speech signal measured and encoded for transmission along with the narrowband data. In this context the reduced sample rate made possible by the piecewise-LPC configuration would reduce the computational load involved in calculating residuals, as well as permitting more data bits to be assigned in encoding the residuals in comparison with alternative methods. Thus a multiple rate processor (MRP) voice terminal design based on PLPC can be expected to offer performance advantages as well as computational advantages in comparison with other approaches.

With regard to vulnerability to bit errors, a variety of coding refinements are possible that can alleviate this problem, ranging from simple rearrangement of the bit pattern per data frame, to sophisticated error detection and correction schemes. These tests were made without any refinements of this nature. However, they indicate that coding refinements to reduce susceptibility to bit errors should always provide greater benefit for the PLPC algorithm than they can provide with conventional LPC, because of the intrinsic advantages that are possessed by the PLPC technique: more accurate modeling of the speech signal, and inherent redundancy provided by the PLPC technique.

7.3. Implications for Intelligibility Test and Evaluation Procedures and Standards.

The regression slopes calculated for different speaker's intelligibility scores showed significant differences among the speakers, suggesting that there are innate differences in individual speaker's susceptibilities to bit error effects. The trend tended to follow the relative intelligibility rank possessed by individual speaker's intelligibility scores under ideal conditions (no bit errors), suggesting that some speakers speech signals have intrinsic properties causing them to be more susceptible to signal degradation in general, whether caused by effects of bit errors on the data signals, or by a reduced number of data coefficients, etc. This question deserves further study, since a better understanding of the causes of speaker variability might lead to improvements in the voice processing algorithms to meet the goal of obtaining fully adequate performance with a large and varied population of speakers.

Since the values of the independent variable (bit error rate) were equal in each speaker test, the overall regression equations (all speakers) involved values of the slope and elevation that were the average values of the slopes and elevations respectively, of individual speakers. The reasons for this are discussed in Appendix I.1.

The analysis of variance findings showed that highly significant differences among intelligibility scores for individual speakers were present, as well as significant interactions between speakers and processors, as well as speakers and bit error rates. Conspicuous evidence of these interactions is revealed in comparing the regression lines derived from the LPC and the PLPC performance data with speakers LL and PK, for example (Figs. 5 and 9).

The degree of speaker variability and speaker/processor interactions suggests that inadequate attention has been given to this topic. While these effects have been commonplace in speech testing over the past several years, they have received little attention, in part because of the practice of calculating standard errors from listener mean scores only. The economics of speech testing would rule against routine testing with a large number of speakers. However, if the purpose of test and evaluation is to guide critical decisions in comparing the performance of alternative processors, to evaluate the significance of improvements in the speech processing algorithms, or to predict the performance that can be expected with a large and varied population of speakers, it is likely that the present practice of testing with six (male) speakers is marginal, and that a reevaluation should be made as to an appropriate number and types of speakers to be used in speech testing in order to fully meet these objectives.

For the near-term, it would seem desirable to double the number of speakers as a minimum, where critical tests are required. With twelve speakers, the idiosyncrasies of individual speakers would tend to be averaged out in the data population, a result particularly valuable in regard to the data for the individual intelligibility features. Since it is in these fine details that the significance differences between different processors are found, the proposed change should be of considerable value not only for comparing processors, but for clearly identifying the intelligibility features that are most deficient and where refinements could bring the greatest benefits.

With regard to further testing in order to assess effects of bit errors on speech intelligibility, tests with processors that incorporate special coding provisions to reduce vulnerability to bit errors should include test conditions at 10% and 20% bit error rates in addition to those reported here. Tests at these six rates would result in a mean bit error rate of 6.5% (compared with 2.25% in these tests). The confidence limits associated with regression models have the property of widening above and below the mean value (see Appendix I.1); the additional rates would give the tightest confidence limits for predicting scores in the range from about 5% to 8% bit error rate.

It would be desirable to conduct further tests of bit error conditions with two replications of each processing condition (Note: replications of <u>processing</u>, as opposed to replication of the presentation to listeners). Such a procedure would permit a better assessment of variations caused by the algorithm or process used to generate the bit errors.

### 8.0 CONCLUSIONS AND RECOMMENDATIONS.

Formal tests and evaluations were conducted to compare the susceptibility of narrowband linear predictive coding (LPC) for voice processing, and the more recent innovation of piecewise linear predictive coding (PLPC) to the effects of bit errors, both processor configurations operating at a 2400 bit-per-second data rate. Test results confirmed an hypothesis that piecewise LPC voice processors are less susceptible to bit errors than conventional LPC.

Significant differences were found in the susceptibilities of individual speakers and individual intelligibility features to the effects of bit errors.

Linear regression models were utilized in constructing tables predicting intelligibility performance, and approximate confidence limits for the predictions, over a range of bit error rates. These tables include interpolation and extrapolation for estimating intelligibility performance that might be obtained under specified bit error conditions.

The findings suggest that the piecewise version of linear predictive coding for narrowband digital voice communications offers a superior alternative to conventional linear predictive coding (LPC), since these benefits are obtained simultaneously with a relaxation of hardware implementation requirements for speed and number of computations.

The piecewise linear predictive coding (PLPC) processor was shown to consistently give better intelligibility than LPC, both under "ideal" conditions and under bit error conditions.

Further improvement in the piecewise-LPC voice processor performance is foreseen with minor refinements of the frequency band arrangement, and the parameter coding tables used in PLPC.

These benefits are foreseen to carry over to a medium bandwidth configuration of piecewise-LPC operating at 8.0 or 9.6 kilobits per second, adding a residual signal for improved speech quality and naturalness and tolerance to acoustic noise environments.

It is recommended that the research and development on piecewise linear predictive coding be accelerated to completion of the optimization of performance of the narrowband version, and to include investigations and implementation of a feasibility model operating at 8.0 and 9.6 kilobits per second in addition to the narrowband configuration. The investigation should also address the feasibility of embedding the 2400 bit-per-second data stream in the data stream at the higher data rates.

### BIBLIOGRAPHY

- B.S.Atal and S.L.Hanauer, "Speech analysis and synthesis by linear prediction of the speech wave," Jour.Acous.Soc.Am. 50 No.2 (Part 2), 1971.
- 2. W.J.Conover, Practical Nonparametric Statistics, John Wiley & Sons, NY (1971).
- G. Fant, Acoustic Theory of Speech Production, Mouton & Co., 's-Gravenhage, 1960.
- J.E.Roberts and R.H.Wiggins, "Piecewise linear predictive coding (PLPC)," Conf.Record, 1976 IEEE Intl.Conference on Acous., Speech and Signal Processing, IEEE Cat.No.76CH1067-8 ASSP, 470-473, Apr 1976.
- 5. J. Makhoul, "Linear prediction: a tutorial review," Proc. IEEE <u>63</u>, 561-580, Apr 1975.
- H. Scheffe, The Analysis of Variance, John Wiley & Sons, New York (1959).
- G.W. Snedecor and W.G.Cochran, Statistical Methods (6th Ed.), Iowa State University Fress (1967).
- W.D.Voiers, A.D.Sharpley and C.J.Hehmsoth, "Research on diagnostic evaluation of speech intelligibility," AFCRL-72-0694, Jan. 1973.
- B.J.Winer, Statistical Principles in Experimental Design, (2d Ed.), McGraw-Hill Book Co., New York (1971).
- R. Jakobson, C.G.Fant and M. Halle, Preliminaries to Speech Analysis: The Distinctive Features and Their Correlates. MIT Press, Cambridge, Mass. (1969).

INTELLIGIBILITY FEATURE: VOICING

Voicing Feature - Absent Voicing Feature - Absent VOICING (Non - Frictional) VOICING (Frictional FAULT CHOCK FOAL SUE **FAUNT** POND TENSE PEEN SAID CALF FEEL CHIN FAST 1 I I 1 1 I 1 1 1 I GAFF DAUNT BOND GOAT DUNE JOCK VOLE ZOO DENSE Voicing Feature – Present BEAN VEAL VAULT Voicing Feature - Present VAST GIN DINT Items for Test Items for Test

A.I. DRT test words for Voicing.

-42-

THREE-WAY ANALYSIS OF VARIANCE (m OBS. PER CELL)

Reference: Comparison of LPC and PLPC intelligibility Scores at 2400 BPS with bit errors: VOICING. intelligibility Scores for

•---Non-Frictional =7 Nr. of replications ("M"): [Scores for four VOICING states, x 2 presentations] VOICING ABSENT Nr. of rows ("A" 1s): [Processor Modes: LPC and PLPC, at 2400 BPS] Frictional 4 = X ÷ Non-Frictional =9 Nr. of levels ("C" 's) : [Bit Error Rates] VOICING PRESENT Nr. of columns ("B" 1s): [Speakers] Test #2050. Frictional Values by rows: LPC at 2400 BPS.

8= M

rare. Tesr #2051. Zero bit error rate. 15 bir error RH E AA RH Speaker LL JE ND Speaker LL E PK NO JE Speaker Speaker Speaker Speaker Speaker Speaker Speaker Speaker Speaker Speaker

Data Table: Voicing Intelligibility Scores for LPC and PLPC. A.2.

-43-

VOICING	PRESENT	0 ^	ABSENT
Frictional	Non-Frictional	Frictional	Non-Frictional
C at 2400 BPS - continue			
5% bir error rate. lest #200			
5.6	m	4.	4.
8.7	c 0	6 4 0 0 0 0	40
peaker CH 100.0	00	0.0	
eaker PK 71.8	-00 •	- 4 - 4	0.0
eaker JE 62.5	n Cl	-4	-40
56.25 Speaker BV 81.25 78.12	100.00 100.00	50°02 78°12	75.00
5% bit error rate. Test ∦205	i3 <b>.</b>		
-	3.7	2.2	2°0
-00	-00		- Mu
0 00 4		1000	
	000	-0-	9 0 0 0
Speaker BV 65.62 71.87	96.87	50 68 75	78,12
Zero bit error rate. Test #2	.043.		
	00	7. D	- 80
			000
	000	89	00
- 11		• • • •	
-00		00	
Speaker BV 93.75 96.87		87.50 84.37	87.50
A.2continued (part	2).		

-44-

BSENT	Non-Frictional		000				100				1010		0	900 90 90 90 90 90		ו40	- 10 H		-0		288	
VOICING A	Frictional		500	93.75			0 0 0		7.5	- 00 - 00	100	• • • •	500	71.87		4.	100	0		- C	625.000	
PRESENT	Non-Frictional		97.0			- 010	0 00		0.0				- M 4	000		4 • 4 5 • 4	100				000	
VOICING	Frictional	PS - continue	6 87 × 20		-00	- 00 -	00	rate. Test #2048.	1.2		00	000	140	96,87	rate. Test #2049.	0.0		-00			96.87	
		t 24	peaker LL	Speaker CH	Speaker PK	Speaker JE	Speaker BV	3% bit error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	5% bit error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker uv	

A.2. -continued (part 3).

-45-

THREE-WAY ANALYSIS OF VARIANCE (m OBS. PER CELL)

Reference: Comparison of LPC and PLPC intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for VOICING.

F ratio		8 <sub>6</sub> 85945 ** (p=_9969)	4   3393 *** (p= 9999)	40 <sub>6</sub> 5382  <sup>***</sup> (p=,9999)	2.33415 * (p=.9558)	I 06240 (p= 5780)	1.15710 (p=,5379)	•68267		
Mean Square	571.57118	1937.61525	3091.17422	8887.81418	510.49287	232,35492	253 <b>.</b> 06578	149 30470	218,70579	
Sum of Squares	4000,99829	1937.61525	15455,87111	26663,44256	2552.46438	697 <b>.</b> 06477	3795,98678	2239 57060	71954.20689	129297,22063
Degrees of Freedom	7	rs )	5	3	5	3	15	5	329	383
Source of Variance	Replications	"A" 's (pro cessors)	"B" 's (speakers)	"C" 's (BER's)	AU Interactions	AC interactions	BC Interactions	ABC interactions	Error	Toral

# A. 3.J. Analysis of Variance Summary: Voicing (Total).

THREE-WAY ANALYSIS OF VARIANCE (# OUS. PER CELL)

Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for VOICING PRESENT.

0		41.43220 *** (p=.9999)	37.66730 *** (p=.9999)	23.64660 *** (p=.9999)	8.70073 *** (p=.9999)	7.22205*** (p=.9998)	2.97967*** (p=.9996)	2.43606 ** (p=,9964)		
F ratio		41.4322	37.6673	23,6466	8.7007	7.2220	2.9796	2.4360		
Mean Square	442,54931	5708.44036	5189.72050	3257.97811	1198,76867	995 <b>•0</b> 3953	410.53390	335 63555	137,77785	
Sum of Squares	1327.64794	5708,44036	25948 <b>.</b> 60251	9773 <b>.</b> 93434	5993 <b>.</b> 84337	2985.11859	6158-00864	5034 53337	19426•67719	82356_80631
Uegrees of Freedom	3	rs)	) 5	3	5	3	15	15	4	161
Source of Variance	Replications	"A" 's (processors)	"B" 's (speakers)	"C" 'S (BER'S)	AB Interactions	AC Interactions	BC Interactions	ABC Interactions	Error	Total

A.3.2. Analysis of Variance Summary: Voicing Present.


-47-


### THREE-WAY ANALYSIS OF VARIANCE (m OBS. PER CELL)


### Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for VOICING ABSENT.


		(p=.8527)	(6666°=d)	(6666°=d)	(b= 8900)	(p=.8708)	(p=,7263)	(6666°=d)		
F ratio		1.92857	10_68237 *** (p=_9999)	64.49191 *** (p=.9999)	1.88015	1.95514	1.29787	3.85803 *** (p=.9999)		
Mean Square	871-57513	176.96640	980 <b>.</b> 21554	5917.78280	172.52283	179.40454	119.09354	354.01802	91.76007	
Sum of Squares	2614.72539	176,96640	4901.07773	17753.34842	862 • 61 4 1 9	538.21364	1786.40319	5310.27043	12938.16994	46881.78933
Degrees of Freedom	3	rs)	5 (	З	5	3	15	15	4	161
Source of Variance	Replications	"A" 's (processors)	"B" 's (speakers) 5	"C" 's (BER's)	AB Interactions	AC interactions	BC Interactions	ABC Interactions	Error	Total

# A.3.3. Analysis of Variance Summary: Voicing Absent.

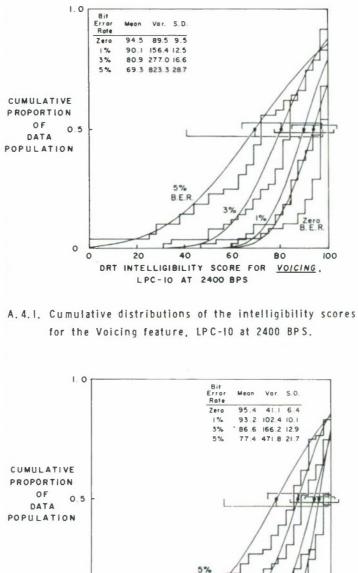






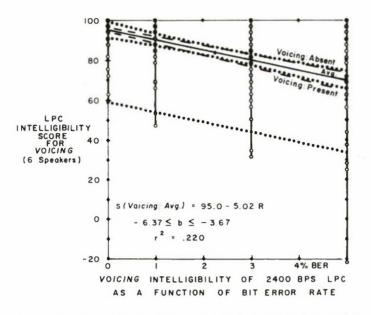

A.5.1. Scatter plot of scores, and linear regression model for the <u>Voicing</u> intelligibility feature, obtained with LPC-10 at 2400 BPS. Regression lines for <u>Voicing-Present</u>, and Voicing-Absent, are also shown.

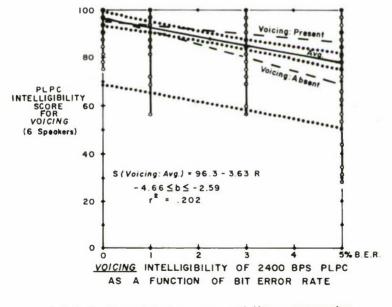

A.5.2. Scatter plot of scores, and linear regression Model for the <u>Voicing</u> intelligibility feature, obtained with PLPC at 2400 BPS.

Bit	Intelligibili	ty	95% Contider	ce Limits
Error Rote	of VOICING	<u> </u>	spected Avg. Score	Individual Scores
0	95.0		90.96-98.97	58.73-131.21
1	89.9		86.85-93.05	53.80 - 126.10
2	84.9		82.31-87.55	48.81 -121.04
3	79.9		77.12-82.70	43.78 -116.03
4	74.9		71.37-78.41	38.70 -111.08
5	69.9		65.33 - 74.41	33.57-106.17
6	64.8		59.15 - 70.55	28.38 -101.32
7	59.8	Extrapolated	52.89 - 66.76	23.15 - 96.51
8	54,8	Values	46.60 - 63.02	17.87 - 91.75
9	49.8		40.29 - 59.29	12.54 - 87.04
10%	44.8		33.96 - 55.58	7.17 - 82.37

Intelligibility of <u>VOICING</u> vs. Bit Error Rote, for 2400 BPS LPC-10 Model: S(LPC)= 94.97-5.020(BER%) (Bosed on 192 points)

A. 6.1. Predicted intelligibility scores for <u>Voicing</u>, LPC-10 at 2400 BPS with bit errors (with no provisions for error protection).

Intelligibility of <u>Voicing</u> <u>vs.</u> <u>Bit Error Rote</u>, for 2400 BPS PLPC Model: S(PLPC) = 96.32 - 3.625(BER%) (Based on 192 points)

Bit	Intelligibili	ty	95% Confide	ence Limits
Error Rale	of Voicing	Ex	pected Avg. Score	Individual Scores
0	96.3		93.27 - 99.38	68 67 - 123.97
1	92.7		90.33 + 95.06	65.12 ↔ 120.28
2	89.1		87.07 + 91.07	61.52 +116.62
3	85.4		83.32 • 87.58	57 88 +113.01
4	81.8		79.14 + 84.50	54.21 +109.43
5	78.2		74.73 + 81.66	50.50 -105.89
6	74.6	+	70.22 - 78.92	46.75 ↔ 102.39
7	70.9	Extrapolated	65.66 + 76.24	42.96 - 98.93
8	67.3	Values	61.06 - 73.58	39.14 ↔ 95.51
9	63.7		56.45 - 70.94	35.28 ↔ 92.12
10%	60.1		51.83 + 68.32	31.38 - 88.76

A. 6.2. Predicted intelligibility scores for <u>Voicing</u>, PLPC at 2400 BPS with bit errors (with no provisions for error protection). NASALITY INTELLIGIBILITY FEATURE:

NASALITY (Grave)	Nasality Feature – Absent	I I I I I I I I I I I I I I I I I I I	NASALITY (Acute)	Nasality Feature – Absent	I I I I I I I I I I I I I I I I I I I
Test Items for	Nasality Feature – Present	MEET MEND MAD MOM MOSS MOAN	Test Items for	Nasality Feature - Present	NEED NECK NAB KNOCK GNAW NOTE

B.I. DRT test words for Nasality.

THREE-WAY ANALYSIS OF VARIANCE (m OBS. PER CELL)

Reference: Comparison of LPC and PLPC intelligibility Scores at 2400 BPS with bit errors; intelligibility Scores for NASALITY.

2=   8= M		00070000000000000000000000000000000000	88888700 7870 7800 7800 7800 7800 7800
0 BPS] ations]	ABSENT	0000000004000	00400000000000000000000000000000000000
and PLPC, at 2400 6= J 4= K tes, x 2 presenta	Grave	00000 000000	00000000000000000000000000000000000000
r Modes: LPC ers] rror Rates] HASALITY sta	ITY PRESENT Acute \$2050.	I	00000000000000000000000000000000000000
ws ("A" 's); [Pr lumns ("B" 's); vels ("C" 's) ; plicarions ("M")	rows: NASAL Grave BPS. For rate, Test	LL 100.00 RH 96.87 CH 96.87 PK 100.00 JE 100.00 JE 814.37 BV 96.87 BV 96.87 Fror rate. Test #2051	98170004000000000000000000000000000000000
Nr. ôf ro Nr. ôf co Nr. ôf le Nr. ôf le	Values by LPC ar 2400 Zero bir er	Speaker LL Speaker R Speaker CH Speaker JE Speaker JE Speaker BV	Speaker LL Speaker RH Speaker CH Speaker PK Speaker JE Speaker BV

Data Table: Nasality Intelligibility Scores for LPC and PLPC. B. 2.

-53-

LPC at 2400			olave.	ACUTE
	BPS)			
& bir error	rate. Tesr #2052.			
peaker LL	2.7	2. 2	0.0	7.5
peaker RH	on'			100
peaker CH	100		D MI	100
peaker PK			-01	
peaker JE	000			100
peaker ůV	87.50 87.50	96.87	96 87	96 87 96 87
\$ bit error	rare. Tesr #2053.			
peaker LL	7.5		2.7	0.0
peaker RH		.00	5	
peaker CH		0000	80	-Mc
peaker PK				
peaker JE			10	
peaker BV	56.25	84.37	75.00	68, 75
PC ar 2400	BPS.			
ero bit erro	r rate. Test #2043			
peaker LL	0.0	0.0	0.0	6.8
peaker RH			00	25
peaker CH			-00	
peaker PK				-00
peaker JE				
peaker 3V	75.00 87.50		96 87 96 87	93,75

B. 2. -continued (part 2).

TY ABSENT	Acute		000-00-0-	000 000	800	990		2.0	- C		96.8	00	75 00		8.9			4	ne	50.00
NASALITY	Grave		100.00 90.62 93.75	0 ° ° °	000	0100		8.7	000		0	500	84 37 90 62		C1.	144	100	8	8	96 87
Y PRESENT	Acute	47.			800	0 N - 0	48.	1.2			87.0		81.250	49 <b>.</b>	800	100		8.7	0	71.87
NASALITY	Grave 00 BPS )	r rate. Test #20	90 62 000 62	000	000	80 A	r rate. Test #20	8 4 - C				100 0	93.75	r rate. Test #20	0	- 000			500	78.12
	(PLPC at 240	1% bir error	Speaker LL Speaker RH	peaker C	Speaker PK	peaker B	3% bit error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	5% bit error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV

-55-

### B.2.-continued (part 3).

The second

## THREE-WAY ANALYSIS OF VARIANCE (m 085. PER CELL)

### Reference: Comparison of LPC and PLPC Inrelligibiliry Scores at 2400 bPS wirh uir errors: Inrelligibiliry Scores for HASALITY.

			(p=.9488)	(6666°=d)	(0666°=d)			(p=,6474)		
F rario		.00818	2.25619	59 34C64 ***	4 . 2407ú ***	.77608	. 84566	1.27246		
Hean Square	413,60650	.91259	251.85800	6618,30038	472.97569	80,62338	94.31760	136.34227	111.53063	
S										
Sum of Squares	2895.24552	.91259	1259 29034	19854 <b>.</b> 90116	2364 87845	259.87194	44.76412	2045.13405	36693.58053	66788 <b>.</b> 57840
vegrees of Freedom	7	1 (	5	3	5	٣	5	15	329	383
a	Replicarions	"A" 's (processors)	"៤" 's(speakers)	"C" 's (GER's)	Au Inreracrions	AC Interacrions	dC Interactions	AdC Inreractions 15		
Source of Variance	Repli		1 "5"	• "J"	Auln	AC In	ul Ju	AUC I	Error	Tora

# B. 3.1. Analysis of Variance Summary: Nasality (Total).

THPEL-WAY AWALYSIS OF VARIANCE (# 045, PER CILL)

Keference: Comparison of LPC and PLPC Inrelligibility Scores at 2400 bPS with bir errors: Inrelligibiliry Scores for HASALITY PRESENT.

F rario		3.97173* (p=.9541)	13,93135 *** (p=,9999)	39.75431 *** (p=.9999)	4 92500 *** (p= 9997)	<b>1</b> • 43784 (p= ,7463)	3.13730 *** (p= ,9998)	.85874		
lican Square	524.06675	249 • 24967	P74.27324	2494.31307	309.07233	90•23318	196.88427	53.30152	62 a 75578	
Sum of Squares	1572.20025	249.24967	4371.36623	7484.43923	1545.36168	270 699 56	2953,26408	808,37282	8848 56605	28103,51957
Uegrees of Freedom	3	ors)	S) 5	3	S	s 3	5	as 15	4	161
Source of Variance	Replicarions	"A" 's (processors)	"u" 's(speakers)	"C" 15 (BER'S)	AB Inreractions	AC Inreractions	BC Interactions	ASC Interactions	Error	Toral

# B. 3. 2. Analysis of Variance Summary: Nasality Present.

THREE-WAY AMALYSIS OF VARIANCE (m UBS. FER CELL)


Reference: Comparison of LFC and PLPC Inrelligibility Scores at 2400 BPS with bit errors:

inrelligibiliry Scores for NASALITY ABSENT.


		(p=,9432)	(6666°=d)	(6666°=d)	(p=.9903)	(b= ,9169)	3.16446 *** (p=.9998)	2.26648 ** (p=.9923)		
F rario		3.59198	10.37316 ***	52,06170 *** (	3.17905 **	2.29579	3.16446 ***	2 • 26648 **		
flean Square	74.12620	293 <b>•</b> 73308	848•26198	4257,32694	259,96647	187.73785	258.77335	185.34130	81.77463	
Sum of Squares	222,37860	293.75308	4241.30990	12771.98084	1299.83236	563.21355	3881.60039	2780.11956	1530-22385	37584 4 39213
Uegrees of Freedom	m	-s)	5	M	5	m	15	5	4	161
Source of Variance	Replicarions	"A" 's (processors)	"6" 's (speakers)	"C" 's (BER's)	Ad Inreracrions	AC Interactions	aC Interactions	AUC Interactions	Error	Toral


B. 3. 3. Analysis of Variance Summary: Nasality Absent.

-58-

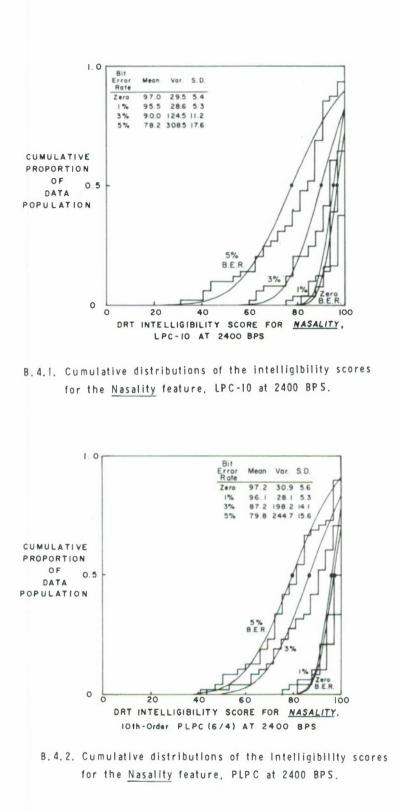

-59-

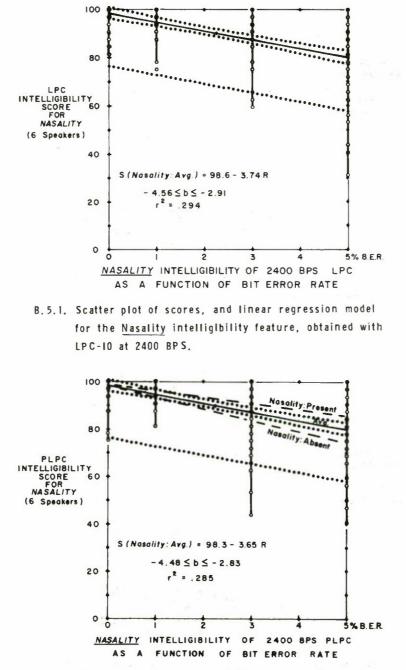



Bit	Intelligibili	ty	95% Confiden	ice Limits	
Error Rote	of NASALITY	E	xpected Avg. Score	Individuol Scores	
0	98.6		96.14-101.04	76.42-120.76	
1	94.9		92.96 - 96.75	72.74 -116.97	
2	91.1		89.51 - 92.72	69.02-113.21	
3	87.4		85.67 - 89.09	65.28 -109.48	
4	83.6		81.50 - 85.80	61.51 -105.79	
5	79.9		77.13 - 82.69	57.70 -102.12	
6	76.2	Ŧ	72.69 - 79.66	53.87 - 98.49	
7	72.4	Extrapolated	68.20 - 76.68	50.00 - 94.88	
8	68.7	Values	63.68 - 73.73	46.10 - 91.31	
9	65.0		59.16 - 70.78	42.18 - 87.76	
10%	61.2		54.62 - 67.85	38.23 - 84.24	

Intelligibility of NASALITY vs. Bit Error Rote, for 2400 BPS LPC-10

Model: S(LPC)= 98.59 - 3.735(8ER%) (Bosed on 192 points)

B.6.1. Predicted intelligibility scores for Nasality, LPC-10 at 2400 BPS with bit errors (with no provisions for error protection).

Intelligibility	of	Nasolity	<u>vs</u>	Bit Error Rot	e, for	2400	BPS	PLPC	
Model		( DI PC) = 98	31 -	3 654 (8FR%)	Rose		2 001	(ata)	

8it	Intelligibili	ity	95	5% Confide	nce Limits	
Error Rote	of Nosolity	Ex	pected	Avg. Score	Individuol Scores	5
0	98.3		95.86	+ 100.76	76.12 ++ 120.50	
1	94.7		92.75	+ 96.55	72.52 ++ 116.79	
2	91.0		89.39	+ 92.60	68.89 + 113.11	
3	87.3		85.64	↔ 89.05	65.23 + 109.46	
4	83.7		81.54	** 85.85	61.53 + 105.85	
5	80.0		77.26	+ 82.82	57.81 + 102.27	
6	76.4	Ŧ	72.89	↔ 79.88	54.06 + 98.71	
7	72.7	Extrapolated	68.48	+ 76.98	50.27 + 95.19	
8	69. I	Values	64.05	+ 74.10	46.46 + 91.69	
9	65.4		59.61	+ 71.24	42.61 + 88.23	
10%	61.8		55.15	+ 68.39	38.74 ↔ 84.79	

B. 6.2. Predicted intelligibility scores for Nasality, PLPC at 2400 BPS with bit errors (with no provisions for error protection). SUSTENTION INTELLIGIBILITY FEATURE:

•

	Absent			Absent	
Test Items for SUSTENTION (Voiced)	Feature - Present Sustention Feature -	VEE VILL BEE VILL BILL VILL I BEE VILL I BILL THEN I DEN VOX VOX I DAN VOX I DAN VOX I DAN VOX I DOUGH I DOUGH I DOUGH	Test ltems for SUSTENTION (Unvoiced)	Feature - Present Sustention Feature -	SHEET - CHEAT THICK - CHEAT FENCE - CHEAT SHAD - TICK SHAD - TICK SHAD - CHAD FOO - CHAD FOO - CHAW FOO - CHAW FOO - CHAW
	Sustention			Sustention	

C.I. DRT test words for Sustention.

Reference: Comparison of LPC and PLPC inrelligibility scores at 2400 BPS with bir errors: Scores for SUSTENTION feature.

2= 1 Nr. of rows ("A" 's); [Processor Modes: LPC and PLPC at 2400 BPS]

Nr. of columns ("B" 's); [Speakers] 6= J

Nr. of levels ("C" 's) : [Bir Error Hares] 4= K

Nr. of replications ("M"): [Four states of SUSTENTION x 2 presentations]

8= 14

	Invoiced	
ABSENT	Nu'n	
SUSTENTION ABSENT	Voiced	
PRESENT	Invoi ced	
USTENTION PRESEN	nu v	
SUS	P	
	Voiced	s,
LOW		0 86
s by		240
Values by rows:		LPC at 2400 BPS.
>		51

Zero bir error rate. Test #2050.

		96 87 96 87	0-1	84 . 37	
Speaker CH		96 87 71 87 87	969 968 18 18 18 18 18 18		
		96 87	100	96.87	
		96 <b>.</b> 87 90 <b>.</b> 62	011	90.62	
Speaker 8V		96.87 93.75	00	71.87 65.62	
1% bir error	ror rare. Tesr #2051.				
Speaker LL		87.50	34 • 37 FD_00	62.50	
Speaker RH		87.50	93.75	96 87	
Speaker CH		43 75 50 00	75.00	81 25	
Speaker PK		90 87 87 50	40.62	90.87	
Speaker JE		56.25	34 37	96.87	
Speaker BV	V 84.37 65.62	78.12 87.50	90 62 84 57	62.50 08.75	

Data Table: Sustention Intelligibility Scores for LPC and PLPC. C. 2.

	SUSTENTION	ION PRESENT	SUSTENTION	TION ABSENT
	Voiced	Unvoiced	Voiced	Unvolced
LPC ar 2400 BPS	- continued.			
3% bir error rat	re. Tesr #2052.			
Speaker LL	3.7	2.7	65.6	
Speaker RH	041		00	
Speaker CH	-	-01		000
Speaker PK	200	00	400	
Speaker JE		000	100	
Speaker BV	71. 87	881.00	75.00	200 000
5% bir error rat	re. Tesr #2053.			
Speaker LL	-L.	5.0	0.0	8.8
Speaker RH	100 4		10	
Speaker CH		mo	10r	
Speaker PK	- CV-	20-1	00	
Speaker JE	OL	04		0
Speaker BV	444 469 87	000 000 000 000	40 16 8 7	87 90 62 62
		•		
PLPC at 2400 BPS	•••			
Zero bir error r	ràte. Tesr #2043.			
Speaker LL	80	0.0		5.8
Speaker RH	000		00	00
Speaker CH				800
Speaker PK				000
Speaker JE	0010 1011			0
Speaker BV	71.87	84.37	000	87.50
1% bir error ran	re. Test #2047.			
Speaker LL	2.0	3.7	6.0	1.2
Speaker RH	96 87 96 87 100 00	90 62 90 62	81•25 93•75	00000
C. 2 co	ntinued (part	2).		

5

-65-

## Reference: Comparison of LPC and PLPC inrelligibiliry scores at 2400 BPS with bir errors:

Scores for SUSTENTION feature.

		(p=.8355)	(6666°=d)	(6666°=d)	(p=,9927)		(p= 8598)			
F ratio		1.70764	23 <b>.</b> 6972 <sup>†***</sup> (p=.9999)	55.30304*** (p=.9999)	3.24699	.81913	1.46105	• 89900		
Mean Square	2536.39191	423.25501	5873,58593	13707,36503	804.79778	203.02910	362 13541	222,82760	247.85915	
Sum of Squares	17754.74341	423,25501	29367.92969	41122.09511	4023,98893	609 08730	5432.03123	3342,41413	81545 66293	183621.20774
Uegrees of Freedom	7	ssors)	ers) 5	3	1S 5	15 J	15 I5	ons 15	329	383
Source of Variance	Replicarions	"A" 's (processors)	"u" 's (speakers)	"C" 's (BER's)	AU Inreracrions	AC Interactions	BC Inreractions	ABC Interactions	Error	Tora

C. 3. I. Analysis of Variance Summary: Sustention (Total).

Reference: Comparison of LPC and PLPC intelligibility scores at 2400 BPS with bir errors:

Scores for SUSTENTION(Voiced).


		(p=.98801)	(66666°=d)	(66666°=d)	(p=.97710)	(p=•97865)	(p=,99504)	(p=.96023)		
f ratio		6 4 3 3 5 0 <sup>#</sup>	31,60548 ***	42,89056 ***	2.72452 *	3.34572 *	2,35645 **	I . 82506 *		
Mean Square	906.4228B	1253,78963	6159.41900	8358 <b>.</b> 70543	530 <b>.</b> 96757	652,02921	459.23583	355 <b>.</b> 67590	194 88448	
Sum of Squares	2719.26864	1253,78963	30797 09503	25076,11631	2654 85785	1956 <b>.</b> 08764	6888 <b>.</b> 53757	5335 . I 3854	27478 <b>.</b> 71275	104159.58400
Ucgrees of Freedom	3	sors)	rs) 5	3	5	0	5 15	15 15	141	161
Source of Variance	Replicarions	"A" 's (processors)	"b" 's (speakers)	"C" 1 S (BER'S)	Ab Inreractions	AC Interactions	BC Interactions	ABC Interactions	Error	Toral

C. 3. 2. Analysis of Variance Summary: Sustention (Voiced).


Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors: Scores for SUSTENTION(Unvoiced).

			(6666°=d)	(6666°=d)	(p= .9987)		(p=_9648)			
F rario		.19983	7.92104 ***	28,32047 ***	4.22698 **	•72264	I. 85732 *	• 40084		
Mean Square	629 <b>•</b> 12164	39.86719	1580.22949	5649 86860	843,27422	<b> 44</b>   5689	370 5 31 88	79 <b>.</b> 96689	199.49769	
Sum of Squares	1887.36492	39,86719	7901.14748	16949 • 60582	4216.37111	432.50067	5557 <b>.</b> 97827	1199.50342	28129.17501	66313 <b>.</b> 51389
Degrees of Freedom	3	5) I	ŝ	3	5	3	5	15	4	161
Source of Variance	Replications	"A" 's (processors)	"B" 's(speakers)	"C" IS (BER'S)	AU Inreractions	AC Interactions	BC Interactions	ABC Interactions	Error	Toral


## C. 3. 3. Analysis of Variance Summary: Sustention (Unvolced).

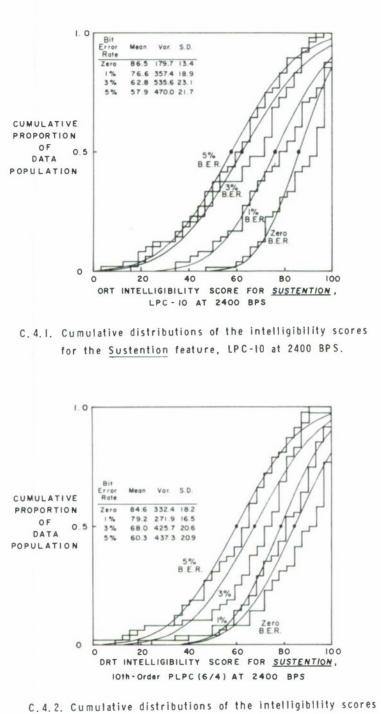



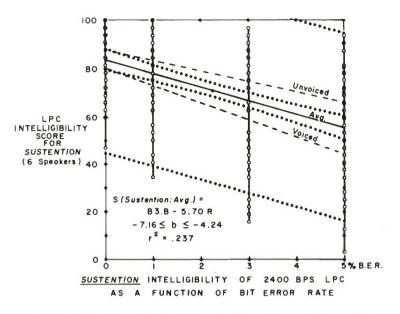

C.5.1. Scatter plot of scores, and linear regression model for the <u>Sustention</u> intelligibility feature, obtained with LPC-IO at 2400 BPS. Regression lines for the Voiced and Unvoiced conditions are also shown.

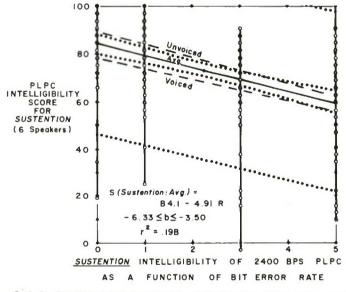

C.5.2. Scatter plot of scores, and linear regression model for the <u>Sustention</u> Intelligibility feature, obtained with PLPC at 2400 BPS. Regression lines for the <u>Voiced</u> and <u>Unvoiced</u> conditions are also shown.

Bit	Intelligibili	ty	95% Confide	nce Limits
Error Rote	of Sustention	Ex	pected Avg. Score	Individuol Scores
0	83.8		79.43 -88.08	44.58 + 122.93
1	78.1		74.70-81.41	38.98+117.13
2	72.4		69.52 +75.19	33.32 ↔111.39
3	66.7		63.64 ++69.67	27.60 +105.70
4	61.0		57.15 +64.75	21.83 +100.07
5	55.3		50.34 + 60.16	16.01 ++ 94.49
6	50.0	+	43.39 + 55.72	10.13 + 88.97
7	43.9	Extrapolated	36.35 + 51.35	4.20 + 83.50
8	38.2	Values	29.28 +47.02	- 1.78 + 78.08
9	32.5		22.18 ++ 42.72	- 7.81 - 72.71
10%	26.7		15.07+38.43	-13.90++ 67.40

Intelligibility of <u>Sustention</u> vs. <u>Bit Error Rote</u>, for 2400 BPS LPC-10

C.6.I. Predicted intelligibility scores for <u>Sustention</u>, LPC-10 at 2400 BPS with bit errors (with no provisions for error protection).

Intelligibility of <u>Sustention</u> <u>vs.</u> <u>Bit Error Rote</u>, for 2400 BPS PLPC Model: S(PLPC) = 84.08 - 4.912(BER%) (Based on 192 points)

8it	Intelligibil	ity	95% Confider	nce Limits
Error Rate	of Sustention	Ε	xpected Avg. Score	Individual Scores
0	84.1		80.00 - 88.26	46.23 ++ 121.93
1	79.2		75.93 + 82.41	41.41 -116.93
2	74.3		71.52 + 76.99	36.54 ++ 111.97
3	69.3		66.43 + 72.26	31.61 ++ 107.08
4	64.4		60.76 + 68.11	26.63 - 102.23
5	59.5		54.78 + 64.26	21.60 - 97.44
6	54.6	ł	48.65 + 60.57	16.52 ↔ 92.70
7	49.7	Extrapolated	42.45 + 56.94	11.39 + 88.01
8	44.8	Volues	36.22 + 53.36	6.20 - 83.37
9	39.9		29.95 + 49.80	0.97 - 78.78
10%	35.0		23.68 + 46.25	- 4.31 + 74.24

C.6.2. Predicted intellig/bility scores for <u>Sustention</u>, PLPC at 2400 BPS with blt errors (with no provis)ons for error protection). SIBIL ATION INTELLIGIBILITY FEATURE:

Test Items for SIBILATION (Voiced)	Sibilation Feature - Present Sibilation Feature - Absent	ZEE - THEE JILT - GUEST JEST - GUEST JAWS - GOT JAWS - GOT JOE - GOT JOE - GOSE JUICE - GOSE	Test Items for SIBILATION (Unvoiced)	Sibilation Feature - Present Sibilation Feature - Absent
Ξ́Ι	Sibilation F		Te	Sibilation f

DRT test words for Sibilation. D. I.

KEEP THING THANK CARE COP THAW THOLE COO

1 I

CHEEP SING SANK CHOP CHOP SAW SOLE CHOO

I

11

Reference: Comparison of LPC and PLPC intelligibility Scores at 2400 BPS with bit errors: feature. SIBILATION Scores for

8= M

Nr. of replications ("M"): [Scores for four 3|BiLATION states, x 2 presentations] \_ 2= 887-25 993-55 993-55 995-55 905-887 905-87 905-8000000000000000000000000000000 Unvol ced SIBILATION ABSENT Nr. of rows ("A" 's): [Processor Modes: LPC and PLPC at 2400 BPS] Volced 4 = K 7 =9 Unvoiced SIBILATION PRESENT Nr. of levels ("C" 's) : [Blt Error Rates] Nr. of columns ("6" 's); [Speakers] Zero bit error rate. Test #2050. IS bir error rate, Test #2051. Volced LPC-10 at 2400 BPS, Values by rows: PK Speaker JE Speaker LL Speaker RH Speaker CH ΒV Speaker LL RH CH PK ΒV Speaker JE Speaker Speaker Speaker Speaker Speaker Speaker

Sibilation Intelligibility Scores for LPC and PLPC. Data Table: D. 2.

ABSENT	Unvoiced	88999999999999999999999999999999999999	0888999988999988 0-1440014009988 144014001400014 14001400140001400	00000000000000000000000000000000000000
SIBILATION	Voiced	88999999999999999999999999999999999999	8889989494889 7400-08087478 7400-08087478 7400-0808478 0400-0508000	7789999988 999999988 999999988 999999999
ON PRESENT	Unvoiced	60000000000000000000000000000000000000	0040855555080 000-50000048 0005500000 00550000000000000000	00000000000000000000000000000000000000
at 2400 BPS - confinuea. SIBILATION	Volced	LL RH 78 78 78 78 78 78 78 78 78 78 78 78 78	error rate. Tesr #2053. - LL 90.62 - RH 28.125 - RH 28.12 - RH 187 - CH 1.87 - FK 71.662 - FK 71.662 - JE 84.37 - JE 84.37 - BV 84.37 - BV 84.37	r 2400 BPS. ir error rate. Test #2043. r LL 87.50 93.755 r RH 96.87 c CH 96.87 96.87 bf 96.87 bf 96.87 r Jf 100.000 r BVi 96.87 bf 96.8
LPC-10	34 hir	peak peak peak peak	5% bit Speaker Speaker Speaker Speaker Speaker Speaker	PLPC at Zero bi Speaker Speaker Speaker Speaker Speaker

D.2.-còntinueë (part 2).

-74-

ION ABSENT	Unvoiced			5. d	5.8	00		100	00000		6.8	- MC	0	00		96.87		0.0	- 00	100	-4L	100	000	
SHBILATI	Voiced			10	0.0	240	100		96.87		1.2		- 00	101		90.62		8.1	140	100 M			80.62	
ION PRESENT	Unvoiced			00	8.1	90	-4 H		93.75		0.0	004		101		78.87		0.0	00	14-	- 4 4 • •		002 002 002 002 002 002 002 002 002 002	
SIBILAT	Voiced	PS - cobrinue	*07# icoi	-10 -20	4.2	7. S	• • •	0 00 0	78.12 81.25	rate. Tesr #2048.	9 • 0	-00	100	0 0 0 0	-00-	75.00	rate. Test #2049.	2.5			- MH	- O-	75.87	
		LPC at 240		peaker L	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	3% bit error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	5% bir error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	

D.2.-continued (part 3).

-75-

Reference: Comparison of LPC and PLPC ar 2400 BPS wirh bir errors:

Inreiligibillry Scores for SIBILATION.

		(6666°=d)	(6666°=d)	(6666°=d)	(p=•9963)	(p=,7184)	(p= .9340)	(p=.8814)		
F ratio		24 <b>.1870<sup>***</sup> (p=.</b> 9999)	8 <b>°U7</b> 550 <sup>***</sup> (p=_9999)	37 <b>.</b> 06066*** (p=.9999)	3 <sub>6</sub> 57920 <sup>##</sup> (p=_9963)	1.35374	1.65390	I. 50449		
Mean Square	2162 62528	2604 53128	869.59229	3990 <b>.</b> 79476	385,41856	145.77506	178,09743	162.0846	107,68276	
Sum of Squares	15138.37697	2604.53128	4347,96147	11972,38428	1927 <b>.</b> 09282	437,32520	2671,46153	2430.12701	35427,62907	76956 <b>.</b> 88963
Uegrees of Freedom	7	l (s.	5	3	5	3	15	15	329	383
Source of Variance	Replicarions	"A" 's (processors)	"B" 's (speakers)	"C" 's (BER's)	AB Inreractions	AC Inreracrions	BC Inreractions	ABC Interactions	Error	Toral

D. 3. I. Analysis of Variance Summary: Sibilation (Total).

Reference: Comparison of LPC and PLPC at 2400 BPS with bit errors: Intelligibility Scores for <u>SIBILATION(Voiced)</u>.


0		10.70743 ** (p=.9987)	3,75636 ** (p=,9968)	•8333  <sup>***</sup> (p=•9999)	3,66135 ** (p=,9961)			(p=.3197)		
F ratio		10.70743	3,75636	11,83331	3,66135	• 52789	•97853	1 07338		
Mean Square	829 92843	1286 • 14283	451.20227	1421.37915	439.78989	63,40953	117.53859	128,93186	120.11674	
Sum of Squares	2489 • 78529	1286.14283	2256.01137	4264 <b>.1</b> 3746	2198 <sub>6</sub> 94949	190.22861	1763 <b>•</b> 07891	1933 <b>.</b> 97803	16936.46174	33318•77373
Uegrees of Freedom	3	sors)	-s) 5	3	1s 5	15 3	15 I5	ns 15	4	161
Source of Variance	Replicarions	"A" 's (processors)	"B" 1s (speakers)	"C" 1s (BER's)	AB Inreracrions	AC Interactions	BC Interactions	ABC Interactions	Error	Toral

## D. 3. 2. Analysis of Variance Summary: Sibilation (Voiced).


Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for SIBILATION(Unvoiced).

F ratio	20	14_52883 (p=_9998)	6.62447 (p=.9999)	29 <b>°</b> 58294 (p=•9999)	4.41343 (p=.9991)	l•51204 (p=.7699)	(•21329 (p=.6243)	•28535 (p=•7 34)		
Mean Square	4167,29529	1318•48885 14•	601 <b>.</b> 16978 6.	2684.64597 29.	400.51835	137°21737	110.10619	116.64608	90 <b>°</b> 74979	
Sum of Squares	12501.88588	1318.48885	3005 84893	8053,95792	2002 59175	411.65211	1651 <b>.</b> 59292	1749.69127	12795 <b>.</b> 72047	43491.41010
Degrees of Freedom	Μ	ssors)	ers) 5	5 (	ns 5	ns 3	ns 15	ons 15	4	161
Source of Varlance	Replications	"A" 's (processors)	"B" 's (speakers)	"C" 's (BER's)	AB Interactions	AC Interactions	BC Interactions	ABC Interactions	Error	Toral


D. 3. 3. Analysis of Variance Summary: Sibilation (Unvolced).

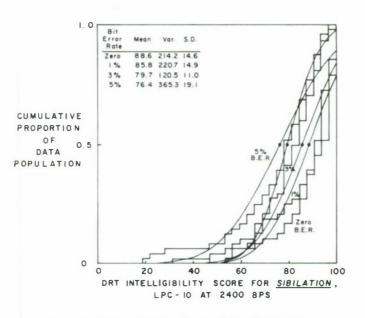



D.4.1. Cumulative distributions of the intelligibility scores for the Sibilation feature, LPC-10 at 2400 BPS.

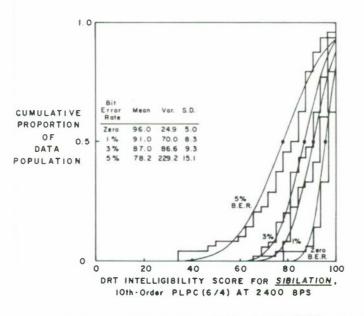

D.4.2. Cumulative Distributions of the intelligibility scores for the Sibilation feature, PLPC at 2400 BPS.

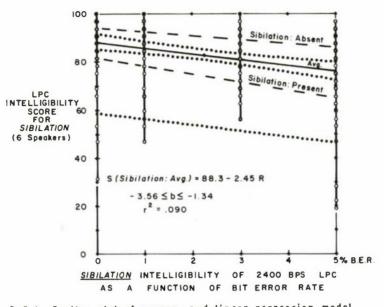



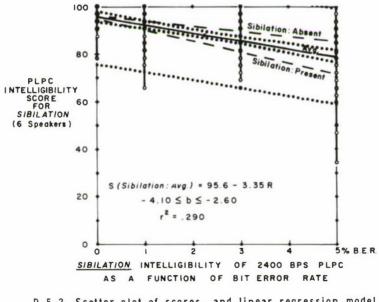

D.5.2. Scatter plot of scores, and linear regression model for the <u>SIbllation</u> Intelligibility feature, obtained with PLPC at 2400 BPS. Regression lines for <u>Sibllation-Present</u> and <u>Sibllation-Absent</u> are also shown.

-80-

Intelligibility	of	Sibilotion	VS.	Bit Error Rote,	for	2400	BPS	LPC-10	
-----------------	----	------------	-----	-----------------	-----	------	-----	--------	--

Model:	S(LPC) = 88.33-	2.446(BER%) (Bosed	on 192 points)
Bit	Intelligibility	95% Confider	nce Limits
Error Rote	of Sibilotion	Expected Avg. Score	Individuol Scores
0	88.3	85.04-91.62	58.58
1	85.9	83.34 ++ 88.43	56.21 +115.56
2	83.4	81.29 + 85.59	53.80 -113.08
3	81.0	78.70 - 83.28	51.34 +110.64
4	78.5	75.66+81.43	48.84 -108.25
_ 5	76.1	72.37-79.83	46.30 -+ 105.90
6	73.7	68.97 - 78.33	43.72 ++103.59

 71.2
 Extrapolated
 65.51 ↔ 76.90
 41.10 ↔ 101.31

58.52 +74.11

55.00 - 72.74

Values 62.02 - 75.50 38.44 - 99.08

35.74 - 96.89

33.00 - 94.73

D. 6.1. Predicted intelligibility scores for <u>Sibilation</u>. LPC-10 at 2400 BPS with bit errors (with no provisions for error protection).

68.8

66.3

63.9

7 8

9

10%

## Intelligibility of <u>Sibilation</u> vs. <u>Bit Error Rate</u>, for 2400 BPS PLPC

Model: S(PLPC) = 95.58 - 3.351 (BER%) (Based on 192 points)

Bit	Intelligibili	ity	9	5 % C	onfider	ice Limits	
Error Rote	of Sibilation	E	spected	Avg :	Score	Individuo	Scores
0	95.6		93.35	- 97	80	75.48-	115.67
1	92.2		90.50	- 93	94	72.17-	112.27
2	88.9		87.42	- 90	.33	68.84-	108.90
3	85.5		83.97	- 87	07	65.49-	105.56
4	82.2		80.22	- 84	.12	62.10-	102.24
5	78.8		76.30	- 81	34	58.68 -	98.95
6	75.5	ł	72.30	- 78	63	55.24 -	95.69
7	72.1	Extrapolated	68.27	- 75	.96	51.77 -	92.46
8	68.8	Values	64.21	- 73	32	48.28 -	89.25
9	65.4		60.14	- 70	.68	44.75 -	86.07
10%	62.1		56.07	- 68	.06	41.21 -	82.92

D.6.2. Predicted intelligibility scores for <u>Sibilation</u>, PLPC at 2400 BPS with bit errors (with no provisions for error protection).

LLIGIBILITY FEATURE: GRAVENESS	st ltems for GRAVENESS (Voiced)	ature – Present Graveness Feature – Absent	WEED - REED BID - DID MET - NET		BONG - DONG BOWL - DOLE	1	ITEMS TOL GRAVENESS (UNVOICED)	eature – Present Graveness Feature – Absent	PEEK – TEAK FIN – TEAK FAD – THIN FAD – THIN POT – THAD FOUGHT – THAD FORE – TOT FORE – THOUGHT FORE – THOR FORE – TOOL	
INTELLIGIBILITY	Test Items fo		WEE BID ME	BAN	BOR	MOO			PEN PEN POUG POUG POUG	

E.I. DRT test words for Graveness.

GRAVENESS (正.) INTELLIGIBILITY FEATURE.

Test items for GRAVENESS (Stopped)

<u>Graveness Feature : Absent</u>	TEAK DID TENT DANK TOT DONG DOLE TOOL
Grave	
Graveness Feature: Present	PEEK BANK BONG POOLC POOLC POOLC
Graveness	

GRAVENESS (Unstopped) Test items for

Graveness Feature : Absent								
Graveness	REED	THIN	NET	THAD	ROD	THOUGHT	THOR	NOON
	I	I	I	1	I	I	1	T
Graveness Feature: Present	WEED	FIN	MET	FAD	WAD	FOUGHT	FORE	MOON
L								
Graveness								

E.I. (part 2) DRT test words for Graveness grouped to permit scoring Graveness(Stopped) vs. Graveness(Unstopped). (This scoring option was not utilized in this battery of tests).

PLPC Intelligibility Scores at 2400 BPS with bit errors: Reference: Comparison of LPC and **GRAVENESS**. Scores for

Σ 8 ----5= Unvoiced GRAVENESS x 2 presentations] **GRAVENESS ABSENT** of rows ("A" 's); [Processor Modes: LPC and PLPC at 2400 BPS] 93.75 93.75 93.75 94.87 94.87 95.97 95.97 ¥ -Volced 7 = 9 Nr. of levels ("C" 's) : [Bit Error Rates] Nr. of replications ("M"):[Four states of Un voi ced **GRAVENESS PRESENT** columns ("B" 's); [Speakers] Zero bit error rate. Test #2050. rate, Test #2051. Volced by rows: LPC at 2400 BPS 15 bit error RH CH Чd GH РK Speaker LL Ш-7 BV Speaker LL RH 5 8 Nr. of Speaker Speaker Values Speaker Speaker Speaker Speaker Speaker Speaker Speaker Speaker "LL

GRAVENESS	PRESENT	GRAVENESS ABSE	SENT
Volced	Unvoiced	Voiced	Unvolced
(LPC at 2400 BPS).			
3% bit error rate. Test #2052.			
3.7	5.		3.1
040	- mr	040	000
	0		000
1004	- 00	- 00	0
	101	-90 -00	- 00
Speaker BV 75.00	662 668 750	93 <b>•</b> 75 90 <b>•</b> 62	28   2 40 62
5% bit error rare. Test #2053.			
5°6	2.5	5.0	2.5
	00	4 00 4	-00-
•••	-00		-01
6.20			- C1 L
- Mu			.0.
Speaker BV 65565	400 60 60 60 60 60	000 000 000 000	31.25
PLPC ar 2400 BPS.			
ero bit error r			
0.0	- 0 - 0	40	4.0
	-170	-Mo	• • • •
	-01-		- 0 F
- M.	- MC	000	
.00			- MR
Speaker BV 100.00	84.50	000000	78.12
E.2continued (part 2).			

-85-

PEC at 2400 BPS)         Unvolced	Volced         Volced         Volced         Volced         Unvolced           LFC at 2400 BFS1         bit rerror rate. Test #2047.         esker LL         94,627         esker VL	GRAVENES	SS PRESENT	GRAVENESS A	ABSENT
UPC at 2400 BPS)     Beker LL     71,000     88,000       Baker LL     71,000     88,000     88,000     88,000       Baker LL     71,000     88,000     88,000     88,000       Baker L     10,000     88,000     88,000     88,000       Baker L     10,000     98,000     88,000     98,000       Baker L     100,000     98,000     98,000     98,000       Baker L     99,000     98,000     98,000     98,000       Baker LL     99,000     99,000     99,000     99,000       Baker LL     90,000     99,000     99,000     99,000       Baker LL     90,000     99,000	LPC at 2000 BPSJ         LPC at 2000 BPSJ         B 11 arror rate         B 1 arror rate         B 2 arror rate         <	Volced	nvolce	olce	010
blit error rate. Test #2043. <sup>355</sup> ,600 <sup>365</sup> ,500	blit error rate. Test #2043.            aaker LL         aaker         aaker LL         aaker         aaker LL	at 2400 BP			
Baker LL     Baker LL     Biological       Baker CH     96.877     95.877       Baker CH     96.877     95.877       Baker CH     96.877     95.877       Baker JE     96.877     95.877       Baker JE     90.967     95.877       Baker JE     90.967     95.877       Baker JE     99.9662     98.975       Baker JE     99.9662     98.975       Baker JE     99.9662     99.9662       Baker LL     99.662     99.9662       Baker LL     90.625     99.9687       Baker LL     90.626     99.9687       Baker LL     90.626     99.9687       Baker LL     90.6262     99.9687       Baker LL     90.6262     99.9687       Baker LL     90.6262     99.9687       Baker LL     90.6262     99.9687       <	Baker       LL       31,25         Baker       CH       31,25         Baker       CH       31,25         Baker       CH       31,25         Baker       CH       39,552         Baker <t< td=""><td>bit error rate. Test #</td><td></td><td></td><td></td></t<>	bit error rate. Test #			
Baker RH     96.87     84.84     RH       Baker RH     96.87     98.756       Baker LL     96.87     99.756       Baker LL     90.662     99.755       Baker LL     90.662     99.755       Baker LL     90.662     99.755       Baker LL     90.662     99.755       Baker LL     90.662     99.662       Baker LL     90.662     99.663       Baker LL     90.663     99.663       Baker LL     90.663     99.472       Baker LL     99.668     99.473       Baker LL     99.668     99.473       Baker LL     99.668     99.473       Baker LL     99.669       Baker LL     99.444	Baker RH     96697     96697     96697     96697       Baker L     Baker L     96697     96697     96697       Baker L     Baker L     96697     96697     96697       Baker L     Baker L     96697     96697     96697       Baker L     Baker LL     96697     96697     96697       Baker LL     999662     996622     996622     996622       Baker LL     999662     934537     956987     9966867       Baker LL     999662     82457     9966887     99668666       Baker LL     999662     82457     9966887     9966887       Baker LL     999662     824575     9966887     9966887       Baker LL     999662     824575     9966987     9966987       Baker LL     999662     824575     999662     999662       Baker LU     999662     824575     9996970     999662       Baker LU     999662     844577     999662     999662       Baker LU     999662     999662     999662     999662       Baker LU     999662     999662     999662     999662       Baker LU     996623     9996623     9996623     9996623       Baker LU     9966233	aker LL 81.2	0.0	8.7	5.0
Baker CH     966.87       Baker CH     1006.00       Baker JE     1006.00       Baker JE     966.87       Baker JE     966.87       Baker JE     966.87       Baker JE     966.87       Baker LL     990.600       Baker LL     990.600       Baker LL     990.67       Baker LL     900.62       Baker LL     900.62 </td <td>Baker CH Baker CH Baker PK Baker BV Baker BV Baker BV Bit error Tate. Test #2048 Bit error Tate. Test #2049 Bit error Test #2049 Bit error Tate. Test #2049 Bit</td> <td>eaker RH 96.8</td> <td>•••</td> <td>-01</td> <td>0 C L</td>	Baker CH Baker CH Baker PK Baker BV Baker BV Baker BV Bit error Tate. Test #2048 Bit error Tate. Test #2049 Bit error Test #2049 Bit error Tate. Test #2049 Bit	eaker RH 96.8	•••	-01	0 C L
Baker PK     70,000     00,000     00,000     00,000     00,000       Baker JL     90,052     55,052     90,000     00,000     00,000       Baker JL     90,052     55,050     90,000     00,000     00,000       Baker LL     90,052     55,050     90,087     90,000     00,000       Baker LL     90,052     55,050     90,087     90,087     90,000       Baker LL     90,052     643,75     90,087     90,000     94,07       Baker LL     90,052     643,75     90,087     90,000     94,07       Baker LL     90,052     643,75     96,087     96,087     94,000       Baker LL     90,052     64,07     96,087     96,087     94,000       Baker LL     90,052     96,075     96,087     96,087     94,000       Baker LL     65,075     96,075     96,075     96,070     94,070       Baker LL     65,075     96,075     96,070     96,070     94,070       Baker LL     65,075     96,070     96,070     96,070     94,070       Baker LL     65,075     96,070     96,070     96,070     94,070       Baker LL     65,075     96,070     96,070     96,070     94,070	Baker Pk     700000       Baker Bv     Bit       Bit     Bit       Bit <td>г СН 96.8</td> <td></td> <td>-</td> <td></td>	г СН 96.8		-	
aaker JE     900,000       aaker BV     B1r error rare.       bir error rare.     Test #2048.       bir error rare.     Test #2049.       bir error rare.     Test #2049. </td <td>Baker JE       900000         Baker BV       B1         Bit error rate. Test       200000         Baker BV       B1         Bit error rate. Test       200000         Baker LL       B1         Baker PK       B1         Baker PK       B1         Baker PK       B1         Baker LL       B1         B1       error rate. Test         B1       <t< td=""><td>eaker PK 71.6</td><td>0</td><td></td><td></td></t<></td>	Baker JE       900000         Baker BV       B1         Bit error rate. Test       200000         Baker BV       B1         Bit error rate. Test       200000         Baker LL       B1         Baker PK       B1         Baker PK       B1         Baker PK       B1         Baker LL       B1         B1       error rate. Test         B1 <t< td=""><td>eaker PK 71.6</td><td>0</td><td></td><td></td></t<>	eaker PK 71.6	0		
Baker Bv         B7.50 Baker B	Baker Bv       By 87.50 Baker LL       By 87.50 Baker Baker Ba	eaker JE 90.6	000		08
bir error rate. Tesr #2048.         Baker LL       90.652         Baker L       16         Baker L       16         Baker L       175         Baker L       16         Baker LL       90.652         Baker LL       90.652         Baker LL       90.652         Baker LL       90.652         Baker LL       16         Baker LL       16         Baker LL       16         Baker LL       16         Baker LL       559.255         Baker LK       559.255         Baker LK       559.255         Baker LK       559.255	bir error rate. Test #2048. aaker LL 990.652 aaker CH 990.653 aaker CH 990.653 aaker CH 990.653 aaker V 887.500 aaker UV 884.575 bit error rate. Test #2049. bit error rate. Test #204	eaker BV 87.57	- 00 - 0 0 0	010	440
LL       99       62       50         RH       99       68       50       62       50         RH       99       68       37       50       68       57         FK       87       50       62       57       55       56       57       55         FK       87       57       58       37       57       96       87       50         FK       887       57       96       87       57       96       87       57         FK       887       50       95       58       12       95       96       87       50         FK       887       57       96       87       97       96       87       97       96       87       96       97       96       97	LL       99         RH       99         RH       99         PK       887         JE       99         JE       99         JE       99         JE       99         JE       887         JE       99         Soldsard       99 <td>ir error rafe.Test #</td> <td></td> <td></td> <td></td>	ir error rafe.Test #			
RH       90,000         RH       90,000         FK       87,50         L       87,50         L       887,50         S       99,000         L       96,837         S       99,000         L       887,50         S       99,000         S       90,000	RH       90,050         FK       837,50         FK       837,50         JE       837,50         JE       837,50         JE       837,50         FX       84,275         FX       84,275         FX       90,623         FX       84,500         FX       90,623         FX	aker LL 90-6	2.5		6.2
CH       456.87 43, 75 68, 75 75 68, 75 75 68, 75 75 68, 75 75 75 887 75 75 887 75 75 887 75 75 887 75 75 887 75 75 887 75 75 887 75 75 887 75 75 75 75 75 75 75 75 75 75 75 75 75	CH       456.87         L       F k       887.50         L       887.50       996.87         B       90.625       996.87         B       1000000       997.50         B       10000000       998.75         B       100000000       998.75         B       1000000000       998.75         B       1000000000       998.75         B	RH 90.6	.00	- 00	- 00
PK       875.50       52.50	PK       B84750         JE       B84750         JE       B84550         SV       B84750         SV       B84750         SV       B84750         SV       B84750         SV       B84750         SV       SV         SV       SV <td>CH 460</td> <td>0.0</td> <td></td> <td>- 00 c</td>	CH 460	0.0		- 00 c
JE     87,500     95,500     95,500       BV     84,37     90,625     90,625       Brror     75,99,37     90,625       Brror     75,99,37     90,625       Brror     75,99,37     90,625       Brror     75,99,37     90,625       CH     53,912     68,75       RH     656,25     73,93       CH     53,912     736,000       RH     53,912     738,000       RH     53,912     738,000       RH     53,912     738,000       RH     53,912     738,000       RH     53,937     738,000       RH     53,912     738,000       RH     53,912     738,000       RH     53,912     738,000       RH     53,912     738,000       RH     53,937     738,000       R     738,000     93,0437       R     75,000     93,0507       S     93,0507     93,0757       BV     75,000     93,0757       S     93,0757	JE       87,500         U       84,37         B       87,500         B       84,37         B       84,37         B       90,625         B       90,625         B       90,625         B       12         CH       55,50         CH       55,93         CH	ker PK 87.5	2000		
BY       B1       25       53       25       25         Brror       Tate       Test       #2049       15       100000       25         Brror       Tate       Test       #2049       15       15       25       25         CH       56       25       16       25       25       15       25       25         RH       62       55       175       175       175       175       25       25         RH       55       25       55       37       78       26       25       25         RH       55       25       55       2	BY       BI 25         BY       BY         BY	r JE 87.5	100		- 00
Fron rate.       Test #2049.         -       LL       56.25         -       RH       682.50         -       RH       682.50         -       CH       53.12         538.12       599.37       78.12         -       CH       53.40         -       CH       53.47         -       CH       53.46         -       CH       53.46         -       CH       53.47         -       CH       53.43         -       CH       54.43         -       CH       55.43	Fron rate.       Test #2049.         -       LL       56.25         -       RH       682.50         -       RH       682.50         -       CH       538.75         -       CH       559.37         -       CH       559.37 <td>aker BV 81.2</td> <td>n</td> <td>000</td> <td>101</td>	aker BV 81.2	n	000	101
LL     56.25       RH     622,55       RH     622,55       CH     538,175       CH     538,175       PK     538,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,122       788,122     788,735       788,122     788,735       788,735     788,735       788,735     788,735       788,735     775       938,755     938,755       788,735     938,755       788,735     938,755       788,735     938,755       938,755     938,755       938,755     938,755       938,755     938,755       756,625     938,755       756,625     938,755       756,625     938,755       756,625     938,755       756,625     938,755       756,625     938,755       756,625     938,755       756,625	<ul> <li>LL</li> <li>FL</li> <li>56,25</li> <li>78,175</li> <li>78,175</li> <li>78,175</li> <li>78,175</li> <li>78,175</li> <li>78,122</li> &lt;</ul>	it error rate. Test ∦204			
RH 682.75 CH 555.25 P K 556.25 P K 556.	RH CH PK CH PK PK PK PK PK PK PK PK PK PK	aker LL 56.2	6.2	2.0	4.0
- CH -	- CH - CH - LE - S55 - LE - V - LE - 26 - 25 - 26 - 26	r RH 68.7	100 V	0.000	200
PK 550.25 PK 550.25 JE 74.975 S0.600 BV 756.25 BV	PK 550.25 PK 550.25 P K 550.25 P M M M M M M M M M M M M M M M M M M M	L CH 53	100	0.0	om
- JE 43375 6250 56025 8102 - BV 56625 81,50 71687 78912 - 87,50 84,37 93,75 34,3	- JE 43.75 52.50 56.25 81.00 71.87 75.00 71.87 78.12 84.37 93.75 93.75 34.3	T 200 000	00	- mu	0 M 0
ker BV 56.25 87.60 78.67 78.67 78.67 78.67 78.67 78.67 75.00	ker BV 56.25 87.50 78.67 78.67 78.67 78.67 78.67 78.67 78.67 78.67 78.67 78.67 78.67 78.67 75.00	JE 43.7		0.0	0.0
		r BV 56.2	004	- 0 - 0 - 0	4 00 0

Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors:

Inrelligibility Scores for GRAVENESS.

		(p= .9847)	(p=.9883)	(6666°=d)				(p=,3430)		
F ratio		5.88737 *	3,01052 *	79.74814 *** (p=.9999)	• 45300	• 42649	•83266	1.08083		
Mean Square	11626 39200	1287,69837	658.46887	17442.67721	99 <b>•</b> 08177	93 <b>•</b> 28312	182,12168	236 40180	218,72203	
Sum of Squares	81384,74403	1287,69837	3292 <b>.</b> 34438	52328 <b>031</b> 63	495 40886	279 <b>。</b> 84936	2731,82522	3-46.02701	71959 • 54911	217305 <sub>e</sub> 47797
Uegrees of Freedom	7	ssors')	ers) 5	3	ns 5	ns 3	ns 15	ons 15	329	383
Source of Varlance	Replications	"A" 1s (processors')	<sup>H</sup> B <sup>H</sup> <sup>1</sup> S (speakers)	"C" 1 (BER'S)	AB Inreractions	AC Interactions	BC Inreractions	ABC Interactions	Error	Total

E. 3. 1. Analysis of Variance Summary: Graveness (Total).

-87-

Reference: Comparison of LPC and PLPC intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for GRAVENESS(Voiced).

61**•**07624 \*\*\* 4**.**26878 2,00813 F ratio **87707** 2.19122 1.04664 1.20451 Mean Square 1345.31998 105.32409 449.60581 230,78829 6432**.**80048 92.37747 110.23709 126.86393 211.50460 Sum of Squares 1153.94146 9298.40145 461.88738 330.71128 3172,56912 4850.69717 45656.73264 4035 95996 449.60581 1902.95901 Degrees of Freedom 51 m 5 m 5 141 161 5 "A" 's (processors) | ABC Interactions "B" 's (speakers) AB interactions AC interactions BC Interactions "C" 's (BER's) Replications Source of Variance Total Error

( | + 36 + 1 ) ( | + 338 | ) ( p= , 9999 ) (p=.5680) (p=.6114)

(E086.=d)


E.3.2. Analysis of Variance Summary: Graveness (Voiced).

A REAL PROPERTY AND A REAL PROPERTY A REAL PROPERTY AND A REAL PRO


Reference: Comparison of LPC and PLPC Intelligibility at 2400 BPS with bit errors: Intelligibility Scores for GRAVENESS(Unvoiced).

		(p=.9217)	(p=•9976)	(6666°=d)			(p=,7136)			
F ratio		3 <b>.</b> 02489	3 <b>e</b> 90333 **	41.90571	e47645	•58839	1.28552	94011		
Mean Square	499 • 20109	872, 87492	1126,35982	12092 <sub>•</sub> 46694	137.48742	169 <b>.</b> 78920	370 <b>.</b> 95639	271.28373	288 <b>.</b> 56368	
Sum of Squares	1497.60327	872,87492	5631.79910	36277 <b>.400</b> 82	687.43711	509,36762	5564 <b>.</b> 3#595	4069.25604	40687.47967	95797 <b>.</b> 56453
Degrees of Freedom	3	sors)	ers) 5	3	S 5	15 3	IS 15	ns 15	4	161
Source of Varlance	Replications	"A" 's (processors)	"B" 's (speakers)	"C" IS (BER'S)	AB Interactions	AC interactions	BC Interactions	ABC Interactions	Error	Total


E. 3. 3. Analysis of Variance Summary: Graveness (Unvoiced).

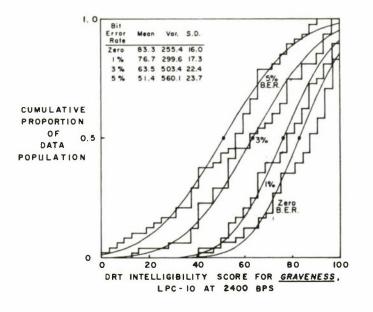


E.4.1. Cumulative distributions of the intelligibility scores for the <u>Graveness</u> feature, LPC-10 at 2400 BPS.

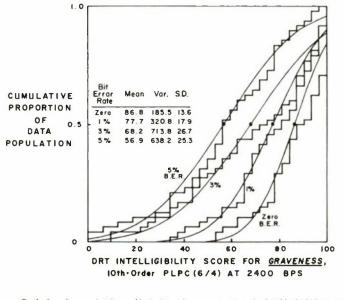

E.4.2. Cumulative distributions of the intelligibility scores for the <u>Graveness</u> feature, PLPC at 2400 BPS.

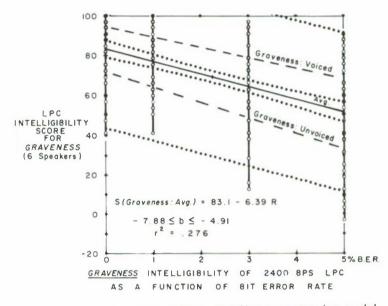



Intelligibility of <u>Graveness</u> <u>vs</u> <u>Bit Error Rote</u>, for 2400 BPS PLPC Model: S(PLPC) = 85.31 - 5.746 (BER%) (Bosed on 192 points)


Bit	Intelligibil	ity	95% Confide	nce Limits
Error Rote	of Graveness	E	xpected Avg. Score	Individual Scores
0	B5.3		80.60 - 90.01	42.68 - 127.93
1	79.6		75.91 + 83.21	37.04 - 122.08
2	73.8		70.73 - 76.90	31.34 +116.29
3	68.1		64.79 - 71.35	25.58 ++ 10.56
4	62.3		58.19 + 66.46	19.76 + 104.89
5	56.6		51.24 +61.92	13.88 - 99.27
6	50.8	÷.	44.12 + 57.54	7.94 - 93.72
7	45.1	Extrapolated	36.93 - 53.24	1.94 + 88.22
8	39.3	Values	29.69 + 48.99	-4.11 - 82.79
9	33.6		22.42 +44.77	-10.22 - 77.40
10%	27.8		15.14 -40.56	-16.38 - 72.07

E. 6. 2. Predicted intelligibility scores for <u>Graveness</u>, PLPC at 2400 BPS with bit errors (with no provisions for error protection).

Bit	Intelligibili	ity	95% Confider	nce Limits
Errar Rate	of Graveness	E	xpected Avg. Score	Individual Scores
0	83.1		78.72 + 87.49	43.39 + 122.82
1	76.7		73.31 + 80.12	37.09+116.33
2	70.3		67.44 ++73.19	30.74 +109.89
3	63.9		60.86 + 66.98	24.33 +103.51
4	57.5		53.67 +61.38	17.87 - 97.19
5	51.1		46.16 ++ 56.11	11.35 + 90.92
6	44.7	÷.	38.49 + 50.99	4.77 - 84.70
7	38.3	Extrapolated	30.74 ++ 45.94	- 1.85 - 78.54
8	31.9	Values	22.96 ++ 40.94	- 8.54 - 72.43
9	25.6		15.14++35.97	-15.27 + 66.38
10%	19.2		7.32+31.00	-22.05 + 60.37

Intelligibility of <u>Graveness</u><sup>1</sup> <u>vs.</u> <u>Bit Error Rate</u>, for 2400 BPS LPC-10 Model: S(LPC) = 83.10 - 6.394(BER%) (Based on 192 paints)

E. 6.1. Predicted intelligibility scores for <u>Graveness</u>, LPC-10 at 2400 BPS with bit errors (with no provisions for error protection).

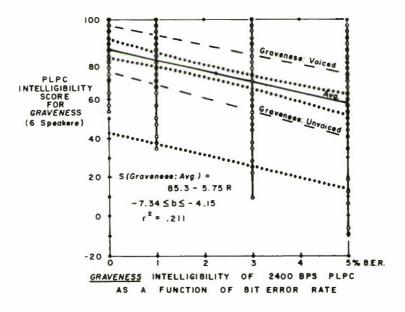

E.5.2. Scatter plot of scores, and linear regression model for the <u>Graveness</u> Intelligibility feature, obtained with PLPC at 2400 BPS. Regression lines for the <u>Volced</u> and <u>Unvolced</u> conditions are also shown.

INTELLIGIBILITY FEATURE: COMPACTNESS	Test Items for <i>COMPACTNESS (Voiced)</i> Compactness Feature – Present Compactness Feature – Absent		OMPAC		
--------------------------------------	--	--	-------	--	--

F.I. DRT test words for Compactness.

-93-

F.I. (part 2) DRT test words for Compactness grouped to permit scoring (This scoring Feature : Absent Absent COMPACTNESS (丑.) Compactness(Interrupted). .. COMPACTNESS (Interrupted COMPACTNESS (Sustained Feature option was not utilized in this battery of tests). Compactness Compactness **TAUGHT** BOAST WIELD WREN SAG FOP WALL SO RUE TEA DILL PEG BAT DOT FIT FEATURE. ł 1 Present Present CAUGHT YIELD YAWL SHOW YOU Compactness(Sustained) vs. SHAG GHOST COOP НОР YEN KEY KEG HIT GAT GOT INTELLIGIBILITY Test items for Test items for Feature : • • Feature Compactness Compactness

-94-

F.I. (part 3) DRT test words for Compactness grouped to permit scoring Feature : Absent Absent COMPACTNESS (Ⅲ.) Middle COMPACTNESS (Back vs. Front, • • Feature VS. COMPACTNESS (Back Compactness Compactness TAUGHT SO WIELD BOAST WALL TEA DILL WREN SAG DOT POOP F I J PEG **FOP** RUE INTELLIGIBILITY FEATURE: 1 1 1 Present Present CAUGHT SHOW GHOST HOP YIELD COOP SHAG Y E N YOU GOT KEY Test items for Test items for • • • • Feature Feature Compactness Compactness

(This

Compactness(Back vs. Middle) vs. Compactness(Back vs. Front).

scoring option was not utilized in this battery of tests).

-95-

Reference: Comparison of LPC and PLPC intelligibility Scores at 2400 BPS with bit errors: intelligibility Scores for COMPACTNESS.

BPS] 2= 1	enrations] 8= M		Unvolced		81.25	93.75	87.50	84.37	87 50	000000		50	75,00	00	mo	SIG	<b>۱</b> Ο Μ
and PLPC, at 2400 B 6≖ J	4≖K srates, x 2 presen	CTNES	Voiced		100.00	00 00	96 87	96 87		000		93•75 96.87			84 37 90.62	00.001	93 75
[Processor Modes: LPC a .):[Speakers]	[Bir Error Rates] : [Four COMPACTNESS	10	Unvoi ced	2050.	00-001	84 37	100.001	93.75	00000	96.87	-	100.00	78.12		90 62	500 CC	93.75
("A" 's); [Pr mns ("B" 's);	vels ("C" 's) : [BIr Er plications ("M"): [Four		Voiced	ror rare. Test #						52°56	r rate. Tesr ∦2051						
Nr. of rows Nr. of colu	Nr. of lev	ues by	0016 001	o bir e	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	1≨ bit error	Speaker LL	<b>Speaker</b> RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV

F.2. Data Table: Compactness Intelligibility Scores for LPC and PLPC.

COMPACTNESS PRESENT

ced	
-	
0	
e n	
0	
60	
0	

Unvol ced

Voiced

COMPACTNESS ABSENT

		5.0	100		-00		62 50		0.00	1004	0	0000	0.00	710 65 65 65			0.00	0			100	000000
		0.0	00	100 0			96.87		0.0	00		-10	.00	870 84 50			6°9			800		00000
	2.	2.1	mo			-50 4	95.87	3.		0000	100		2 - L	755.00 68.75			0.0				9 0 0 0 0 0 0 0	000000
BPS).	rate. Test #2052	00		100		- 00 C	90°62 90°62	rate. Test #2053	4			- 10 - 10		90 62 90 62	BPS	r rate.	0.0			100	00	00000
(LPC at 2400	3% bir error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	5% bit error	Speaker LL	Speaker RH	Speaker CH	Speaker PK	Speaker JE	Speaker BV	PLPC at 2400	Zero bir erro	Speaker LL	Speaker RH	Speaker CF	Speaker PK	Speaker JE	Speaker BV

	MPACTNESS P	-	dwo	ABSENT
	Voiced	Unvoi ced	Voiced	Unvoiced
& bir error	1 BPS) rate. Test #2047.			
peaker LL peaker RH peaker CH peaker JE peaker JE peaker BV	0000 0000 0000 0000 0000 0000 0000 0000 0000	9 9 9 9 9 9 9 9 9 9 9 9 9 9	88 999 990 900 900 900 900 900 900 900 9	87 87 77 87 87 87 87 87 87 87 987 96 87 96 87 96 87 95 95 95 95 95 95 95 95 95 95 95 95 95
å bir error peaker LL peaker RH peaker PK peaker JE peaker JV peaker BV	rate. Tesr #2048. 1006.00 966.87 966.87 953.755 953.755 953.755	99 90 90 90 90 90 90 90 90 90 90 90 90 9	99998899000 9906999000 99069990000 9900699900000 990069900000000	666675 66767 67767 67767 67767 67767 67767 67767 67767 67767 67767 67767 67767 67767 67777 67777 67777 67777 67777 67777 67777 67777 67777 67777 67777 67777 67777 67777 67777 677777 67777 677777 6777777 677777777
% bir error peaker LL peaker RH peaker PK peaker JE peaker BV	Tafe. Test #2049. 003.00 956.87 956.87 956.87 956.87 956.87 956.87 956.87 956.87 956.87 75.00 75.00	80000000000000000000000000000000000000	99999999999999999999999999999999999999	00000000000000000000000000000000000000

F.2.-continued (part 3).

THREE+WAY ANALYSIS OF VARIANCE (m OBS. PER CELL)

Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for COMPACTNESS.

					(p=.8131)	(p=,5744)	(p= 4498)	(p=,9862)			
F rario		e 69922	5,93111 ***	53,21652 ***	1.57908	1.05662	1.11778	2,03143			
Mean Square	2842 <b>•</b> 03583	82,68666	701.37913	6293 0774r	186,73324	124,94987	132,18230	240.22537	118,25418		
Sum of Squares	19894 • 25086	82,68666	3506,89566	18879 <sub>•</sub> 23222	933,66621	374.84963	1982,73456	3603,38068	38905 • 62793	88163,32441	
Uegrees of Freedom	7	sors)	-s) 5	S	IS 5	15 3	15 I5	ons 15	329	383	
Source of Variance	Replicarions	"A" 's (processors)	"B" 's (speakers)	"C" 's (BER's)	AB Interactions	AC Interactions	BC Inreractions	ABC Interactions	Error	Total	

F. 3. I. Analysis of Variance Summary: Compactness (Total).

THREE-WAY ANALYSIS OF VARIANCE (m OBS. PER CELL)

# Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors: Intelligibility Scores for COMPACTNESS(Voiced).

		(p=.8440)	(6666°=d)	(6666°=d)	(p=,9946)		(p=•0165)	( b= .9660 )		
F ratio		I.82946	8.14150	20,91929	3.48744 **	• 72950	I.00698	I 86631		
Mean Square	64.71506	107.67025	479.15613	1231.17428	205 24838	42 <b>.</b> 93392	59 <b>.</b> 26476	109.83939	58 <b>.</b> 85352	
Sum of Squares	194.14519	107.67025	2395.78065	3693 <b>.</b> 52286	1026.24190	128.80176	888.97145	1647.59092	8298,34771	18381 <b>•0</b> 7269
Degrees of Freedom	٢	ors)	s) 5	N	s 5	s 3	s 15	ns 15	4	161
Source of Varlance	Replications	"A" 's (processors)	"B" 's (speakers)	"C" 's (BER's)	AB interactions	AC interactions	BC Interactions	ABC Interactions	Error	Total

F. 3. 2. Analysis of Variance Summary: Compactness (Voiced).


THREE-WAY ANALYSIS OF VARIANCE (m 085. PER CELL)

# Reference: Comparison of LPC and PLPC Intelligibility Scores at 2400 BPS with bit errors:


Inrelligibility Scores for COMPACINESS(Unvoiced).

			(6666°=d)	(6666°=d)	(1666°=d)	(b= 6639)	(p= 6965)	(p= 9992)			
F ratio		•05395	8.77405 ***	52,39185 ***	4.43711	4.31097 **	1.26987	2.79494			
Rean Square	1289.16214	6. 16692	1002+81347	5988.02608	507.13196	492.71400	1.5+13772	319.44285	114.29307		
Sum of Squares	3867,48642	6,16692	5014.06737	17964.07824	2535+65980	1478, 1420 I	2177,06592	4791.64276	16115+32301	53949 63245	
Uegrees of Freedom	ъ	sors)	rs) 5	3	5	5 3	s 15	ns 15	141	161	
Source of Variance	Replications	MAN 1 S (processors)	HgH 1 <sub>S</sub> (speakers)	"C" ts (BER's)	AB Interactions	AC Interactions	dC Interactions	ABC Interactions	Error	Total	


F. 3. 3. Analysis of Variance Summary: Compactness (Unvoiced).

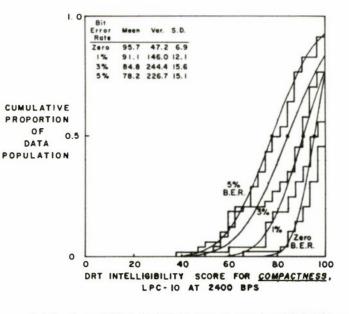


F.4.1. Cumulative distributions of the intelligibility scores for the <u>Compactness</u> feature, LPC-10 at 2400 BPS.

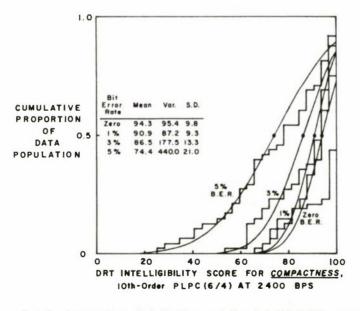



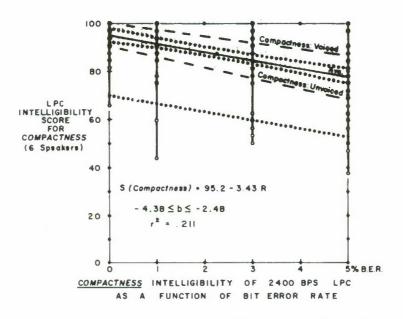

F.5.1. Scatter plot of scores, and linear regression model for the <u>Compactness</u> Intelligibility feature, obtained with LPC-10 at 2400 BPS. Regression lines for the Voiced and Unvoiced conditions are also shown.

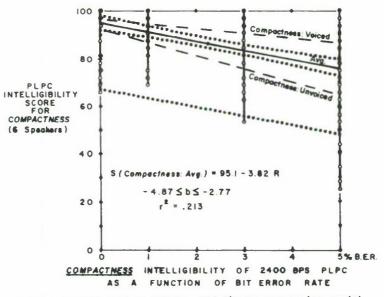

F.5.2. Scatter plot of scores, and linear regression model for the <u>Compactness</u> intelligibility feature, obtained with PLPC at 2400 BPS. Regression lines for the <u>Voiced</u> and <u>Unvoiced</u> conditions are also shown.

Bit	Intelligibilit	y	9	5% Confider	nce Limits
Rote	of Compactnes	ss Ex	spected	Avg. Score	Individual Scores
0	95.2		92.38	+ 98.00	69.73-120.64
1	91.8		89.58	+ 93.93	66.36 +117.15
2	88.3		86.48	+ 90.16	62.96 +113.69
3	84.9		82.93	+ 86.85	59. 52 +110.27
4	81.5		78.99	+ 83.93	56.04 +106.88
5	78.0		74.84	+ 81.22	52.53 +103.53
6	74.6	1	70.59	+ 78.60	48.98 +100.21
7	71.2	Extrapolated	66.29	+ 76.04	45.40 - 96.93
8	67.7	Values	61.97	+ 73.50	41.78 + 93.68
9	64.3		57.63	+ 70.97	38.14 + 90.46
10%	60.9		53.28	+ 68.46	34.45 + 87.28

Intelligibility of <u>Compactness vs. Bit Error.Rate</u>, for 2400 BPS LPC-10 Model: S(LPC) = 95.19 - 3.432(BER%) (Bosed on 192 points)

F.6.1. Predicted intelligibility scores for <u>Compactness</u>, LPC-10 at 2400 BPS with bit errors (with no provisions for error protection).

### Intelligibility of <u>Compactness</u> vs. <u>Bit Error Rate</u>, for 2400 BPS PLPC Model: S(PLPC) = 95,13 - 3.819 (BER%) (Bosed on 192 points)

Bit	Intelligibilit	ly .	95% Confider	nce Limits
Error Rate	of Compactnes	es Ex	pected Avg. Score	Individual Scores
0	95.1		92.02 - 98.24	67.00 +123.26
1	91.3		88.90 - 93.72	63.25 +119.37
2	87.5		85.46 - 89.53	59.46 -115.52
3	83.7		81.51 + 85.84	55.63 +111.71
4	79.9		77.12 - 82.58	51.76 +107.94
5	76.0		72.51 + 79.56	47.86 +104.21
6	72.2	1	67.79 + 76.64	43.91 +100.52
7	68.4	Extrapolated	63.01 + 73.78	39.93 - 96.86
8	64.6	Values	58.21 + 70.95	35.90 ↔ 93.25
9	60.8		53.38 + 68.13	31.85 + 89.67
10%	56.9		48.55 + 65.33	27.75 + 86.12

F. 6. 2. Predicted intelligibility scores for <u>Compactness</u>, PLPC at 2400 BPS with bit errors (with no provisions for error protection).

INTELLIGIBILITY	FEATURE	FEATURE	FEATURE
FEATURE	PRESENT	ABSENT	AVERAGE
VOICING (Avg.)	93.7 - 5.70 R	96.2 - 4.34R	95.0-5.02 R
Frictional	87.3 - 3.28 R	93.8-5.53R	90.5 - 4.41 R
Non - Frictional	100.0 - 8.12 R	98.7 - 3.14R	99.4 - 5.63 R
NASALITY (Avg.)	99.2 - 3.78 R	98.0 - 3.69 R	98.6-3.73R
Grove	97.1 - 4.48 R	97.8-3.54R	97.4-4.01R
Acute	101.3 - 3.08 R	98.2 - 3.83R	99.8-3.46R
SUSTENTION (Avg.)	86.8 - 6.79 R	80.7 - 4.61R	83.8-5.70 R
Voiced	86.2 - 8.29 R	73.3 - 6.09R	79.7 - 7.19 R
Unvoiced	87.4 - 5.29R	88.2-3.13R	87.8 - 4.21 R
SIBILATION (Avg)	82.1 - 3.32 R	94.6- 1.57R	88.3-2.45R
Voiced	81.8 - 2.50R	95.5-2.09R	88.6-2.30R
Unvoiced	82.4 - 4.14 R	93.6- 1.05R	88.0-2.60R
GRAVENESS (Avg.)	82.8 - 6.05 R	83.5-6.74R	83.1-6.39R
Voiced	92.6 - 6.06 R	97.2-4.46R	94.9 - 5.26 R
Unvoiced	72.9 - 6.04 R	69.7-9.02R	71.3 - 7.53 R
COMPACTNESS (Avg.)	97.3 - 3.07 R	93.1 - 3.79R	95.2 - 3.43 R
Voiced	99.6 - 2.19 R	99.9-2.78R	99.8 - 2.48 R
Unvoiced	95.0 - 3.96 R	86.2 - 4.80R	90.6 - 4.38 R

### LINEAR REGRESSION ESTIMATES OF INTELLIGIBILITY VO. BIT ERROR RATE LPC-IO AT 2400 BITS PER SECONO

TOTAL DRT INTELLIGIBILITY SCORE: 90.7 - 4.45 R

G.I. Summary of linear regression equations relating inteiligibility scores and bit error rate, for individual inteiligibility feature states; LPC-10 at 2400 BPS.

LINEAR REGRESSION ESTIMATES OF INTELLIGIBILITY VS. BIT ERROR RATE 10th-Order PIECEWISE-LPC (6/4) AT 2400 BITS PER SECOND

INTELLIGIBILITY	FEATURE	FEATURE	FEATURE
FEATURE	PRESENT	ABSENT	AVERAGE
VOICING (Avg.)	95.6 - 1.71 R	97.0- 5.54R	96.3 - 3.63 R
Frictional	93.1 - 1.94 R <sup>12)</sup>	94.3 - 5.23R	93.7 - 3.58 R
Non - Frictional	98.1 - 1.48 R	99.8 - 5.85R	98.9 - 3.67 R
NASALITY (Avg.)	98.8 - 2.58 R	97.8-4.73R	98.3 - 3.65 R
Grove	97.3 - 2.29 R	97.6-4.85R	97.4 - 3.57 R
Acule	100.3 - 2.86 R	98. I- 4.61R	99.2 - 3.74 R
SUSTENTION (Avg.)	83.1 - 4.56 R	85.1-5.26R	84.1 - 4.91R
Voiced	80.2 - 3.83R	77.2- 5.08R	78.7 - 4.45 R
Unvoiced	85.9 - 5.30 R	93.0- 5.44R	89.5 - 5.37 R
SIBILATION (Avg.)	94.8 - 4.52 R	96.3 - 2.18 R	95.6 - 3.35 R
Voiced	95.3 - 2.91 R	93.7 - 2.31 R	94.5 - 2.61 R
Unvoiced	94.3 - 6.13 R	99.0- 2.05R	96.6 - 4.09 R
GRAVENESS (Avg.)	84.6- 6.73R	86.0-4.76R	85.3 - 5.75 R
Voiced	97.9- 7.38R	96.5 - 2.45R	97.2 - 4.91 R
Unvoiced	71.4 - 6.08 R	75.5-7.08R	73.4 - 6.58 R
COMPACTNESS (Avg.)	98.1 - 4.85 R	92.2 - 2.79R	95.1 - 3.82R
Voiced	96.6 - 2.82R	97.6 - 1.13R	97.1 - 1.98R
Unvoiced	99.5 - 6.88 R	86.8 - 4.45R	93.1 - 5.66R

(s) For this case, the value of the slope was not significant.

G.2. Summary of linear regression equations relating Intelligibility scores and bit error rate, for individual intelligibility feature states; PLPC at 2400 BPS.

### EXPECTED VALUES AND 95% CONFIDENCE LIMITS FOR BIT-ERROR REGRESSION COEFFICIENTS

FEATURE	FEAT URE PRESENT	FEATURE	FEATURE
VOICING (Avg.)	-8.14≤(-5.70)≤-3.27	-5.50 ≤(-4.34) ≤-3.17	-6.37 ≤ (-5.02) ≤-3.0
Frictional	-6.02≤(-3.28)≤54	-7.20 ≤(-5.53 ) ≤-5.86	-5.99 ≤ (-4.41) ≤-2.8
Non - Frictional	-12.17≦(-8.12)≦-4.08	-4.31 ≦(-3.14 ) ≦-1.98	-7.8I ≤(-5.63)≤-3.4
NASALITY (Avg.)	-5.02≦(-3.78)≦-2.54	-4.8 I ≤(-3.69 ) ≤-2.56	-4.56 ≤(-3.74)≤-2.9
Grove	-6.58≤(-4.48)≤-2.39	-5.12 ≤(-3.54) ≤-1.97	-5.30 ≤(-4.01)≤-2.7
Acute	-4.24≦(-3.08)≦-1.92	-5.51 ≤(-3.83) ≤-2.15	-4.49 ≤(-3.46)≤-2.4
SUSTENTION (Avg.)	-8.76≤(-6.79)≤-4.82	•6.80 ≤(-4.61) ≤-2.42	-7.16 ≤(-5.70)≤-4.2
Voiced	-11.26 -6.30) -5.32	-9.25 ≤(-6.09) ≤-2.93	-9.36 ≤(-7.19)≤-5.0
Unvoiced	-7.82≦(-5.29)≦-2.77	-5,17 ≤(-3,13) ≤-1.09	-5.84 ≤(-4.21)≤-2.5
SIBILATION (Avg.)	-5.04≤(-3.32)≤-1.60	-2.29 ≤(-1.57 ) ≤85	-3.56 ≤(-2.45)≤-1.3
Voiced	-5.16≤(-2.50)≤16	-3.10 ≤(-2.09 ) ≤-1.08	-3.89 ≤(-2.30)≤7
Unvoiced	-6.40≤(-4.14)≦-1.89	-2.10 ≤(-1.05) ≤002	-4.18 ≤(-2.60) ≤-1.0
GRAVENESS (Avg.)	-7,71≤(-6.05)≤-4.38	-9.24 ≤(-6.74) ≤-4.24	-7.88 ≤(-6.39) ≤-4.9
Voiced	-7.84≤(-6.06)≤-4.29	-5.91 ≤(-4.46) ≤-3.01	-6.47 ≤(-5.26) ≤-4.0
Unvoiced	-8.00≦(-6.04)≦-4.07	-11.49 ≤(-9.02) ≤-6.54	-9.18 ≤(-7.53)≤-5.8
COMPACTNESS (AV	1-4.08≤(-3.0?)≤-2.07	-5.36 ≤(-3.79) ≤-2.21	-4.38 ≤(-3.43) ≤-2.4
Voiced	-3.03 ≤(-2.19) ≤ -1.34	-3.88 ≤(-2.78) ≤-1.68	-3.17 ≤(-2.48) ≤-1.8
Unveiced	-5.55≤(-3.96)≤-2.38	-7.05 ≤(-4.80) ≤-2.54	-5.84 ≤(-4.58) ≤-2.9

LPC-10 AT 2400 BITS PER SECOND

G.3. Estimated confidence limits for regression slopes: LPC-10 at 2400 BPS.

### EXPECTED VALUES AND 95% CONFIDENCE LIMITS FOR BIT-ERROR REGRESSION COEFFICIENTS

10th ORDER PIECEWISE- LPC (6/4) AT 2400 BITS PER SECOND

INTELLIGIBILITY FEATURE	FEATURE	FEATURE ABSENT	FEATURE
VOICING (Avg.)	-3.00≤(-1.71)≤42	-6.99≤(-5.54)≤-4.09	
Frictional	-4.16≤(-1.94)≤ .28 <sup>(s)</sup>	-7.26≤(-5.25)≤-3.19	-5.13 ≤(-3.58)≤-2.
Non - Frictional	-2.75≦(-1,48)≦22	-7.97 ≤(-5.85)≤-3.74	-5.02 ≤+ 3.671≤-2.
NASALITY (Avg.)	-3.52 ≤(-2.58)≤-1.64	-6.01 ≤(-4.73)≤-3.45	-4.48 ≤(-3.65)≤-2.
Grave	-5.60 ≤(-2.29)≤99	-6.74 ≤(-4.65 ) ≤-2.96	-4.76 SI-3.57) S-2.
Acute	-4.26 ≦(-2.86 )≦-1.47	-6.44≦(-4.61)≦-2.76	-4.92 ≤F3.741≤-2.
SUSTENTION (Avg.)	-6.76 ≤(-4.56 ) ≤-2.36	-7.09 5(-5.26) 5-3.43	-6.33 ≤(-4.91)≤-3
Voiced	-6.88 ≤(-5.85 )≤76	-6.09 5(-5.0815-2.06	-6.57 5-4.4615-2
Unvoiced	-6.60≦(-5.30)≦-2.00	-6.95 ≦(-5.44)≦-3.96	-7.17 ≤(-5.57) ≤-3
SIBILATION (Avg.)	-5.66 ≤(-4.52)≤-3.38	-2.98 ≤(-2.16 )≤-1.38	-4.10 St-3.351 5-2
Voiced	-4.19 ≤(-2.91)≤-1.63	-3.54 ≤(-2.51) ≤-1.08	-5.48 St-2.611 S-1.
Unveiced	-7.72 ≦(-6.13 )≦-4.55	-2.93 ≤(-2.05 1≤-1.17	-5.32 \$(-4.09) \$-2.
GRAVENESS (Avg.)	-6.90 ≤(-6.73) ≤-4.56	-7.06 \$ (-4.76 ) \$ -2.44	-7.34 St 5.75) S-4
Veiced	-9.15 ≤(-7.38)≤-5.61	-3.81 ≤(-2.45)≤-1.08	-6.22 5+4.91)5-3
Unvoiced	-9.23 ≤(-6.00) ≤-2.95	-9.92 5(-7.08)5-4.24	-8.65 ≦(-6.56 )≦-4
COMPACTNESS (Ar	g.)-6.32≦(-4.65)≦-3.38	-4.29 5(-2.79)5-1.26	-4.87 \$(-3.82) \$-2
Veiced	-4.87≦i-2.821≦77	-2.00 \$(-1.13)\$26	-3.10 ≤(-1.981≦
Uswiced	- 6.795(-6.88) 5-4.97	-6.52 5(-4.4515-2.38	-7.11 St-5.6615-4

TOTAL DRT INTELLIGIBILITY SCORE: -4.42 S(-4.18) S-3.95

(1) For this single case, the 95% confidence interval included "zero" slepe; ACCEPT Hd.

G.4. Estimated confidence limits for regression slopes: PLPC at 2400 BPS.

### INTELLIGIBILITY FEATURE SCORES: LPC-10 AT 2400 8PS

Comparing Expected Scores: Regression Model and actual data values

FEATURE Zero		E.R.	۱%		3%		5% 8.E.R.	
Predicte	Predicted	Actual	Predicted	Actual	Predicted	Actual	Predicted	Actual
VOICING	95.0	94.5	89.9	90.1	79.9	80.9	69.9	69.3
NASALITY	98.6	97.0	94.9	95.5	87.4	90.0	79.9	78.2
SUSTENTION	83.8	86.5	78.1	76.6	66.7	62.8	55.3	57.9
SIBILATION	88.3	88.6	85.9	85.8	81.0	79.7	76.1	76.4
GRAVENESS	83.1	83.3	76.7	76.7	63.9	63.5	51.1	51.4
COMPACTNES	SS 95 2	95.7	91.8	91.1	84.9	84.8	78.0	78.2

G.5.1. Comparison of actual scores for individual Intelligibility features, and scores predicted by linear regression models; LPC-10 at 2400 BPS.

### INTELLIGIBILITY FEATURE SCORES: PLPC AT 2400 BPS

Comparing Expected Scores: <u>Regression Madel</u> and <u>Actual Data</u>

FEATURE	Zero B	ER	1%		3%		5% B	E.R.
	Predicted	Actual	Predicted	Actual	Predicted	Actual	Predicted	Actual
Voicing	96.3	95.4	92.7	93.2	85.4	86.6	78.2	77.4
Nosolity	98.3	97.2	94.7	96.1	87.3	87.2	80.0	79.8
Sustention	84.1	84.6	79.2	79.2	69.3	68.0	59.5	60.3
Sibilation	95.6	96.0	92.2	91.0	85.5	87.0	78.8	78.2
Graveness	85.3	86.8	79.6	77.7	68.1	682	56 6	56.9
Compactness	95.1	94.3	91.3	90.9	83.7	86.5	76.0	74.4

G.5.2. Comparison of actual scores for individual Intelligibility features, and scores predicted by linear regression models; PLPC at 2400 BPS. INTELLIGIBILITY FEATURE SCORES: LPC-10 AT 2400 8PS Camparing Predictions fram Regression Model, and actual data:

Intelligibility Scares exceeded by 97-1/2% of the data papulation

FEATURE	Zera B.E.R.		1%		3%		5% B.E.R.	
	Predicted	Actual	Predicted	Actual	Predicted	Actual	Predicted	Actual
Vaicing	5B.7	62.5	53.8	53.i	43.B	34.4	33.6	-21.9
Nasality	76.4	81.3	72.7	7 B. I	65.3	62.5	57.7	40.6
Sustentian	44.6	59.4	39.0	34.4	27.6	18.B	16.0	12.5
Sibilatian	5B.6	46.9	56.2	46.9	51.3	563	463	21.9
Graveness	43.4	46.9	37.1	40.6	243	15.6	11.4	3.1
Campdctness	69.7	81.3	66.4	59.4	59.5	53.1	52.5	46.9

G.5.3. Comparison of intelligibility feature scores predicted by confidence limits, with actual data distributions; LPC-10 at 2400 BPS.

INTELLIGIBILITY FEATURE SCORES: PLPC AT 2400 BPS Camparing Predictions fram Regression Madel, and actual data:

Intelligibility Scores exceeded by 97-1/2% of the data population

FEATURE	Zera 8.E.R.		۱ %		3%		5% B.E.R.	
	Predicted	<u>Actual</u>	Predicted	<u>Actual</u>	Predicted	Actual	Predicted	Actual
Vaicing	6B.7	78.1	65.1	6 B.B	57.9	56.3	50.5	2.B. I
Nasality	76.1	78.1	72.5	B1.3	65.2	53.1	57.B	46.9
Sustentian	46.2	34.4	41.4	40.6	31.6	15.6	21.6	12.5
Sibilatian	75.5	78.1	72.2	75.0	65.5	68.8	5B.7	34.4
Graveness	42.7	53.1	37.0	37.5	25.6	9.4	13.9	- 6.3
Campactness	67.0	6B.B	63.3	71.9	55.6	62.5	47.9	2B. I

G.5.4. Comparison of intelligibility feature scores predicted by confidence limits, with actual data distributions; PLPC at 2400 BPS.

CELL) PER OES. E ) VARIANCE 0F **ANALYSIS** THREE-WAY

EPS. 2400 VT PLPC AND LFC FOR SCOPES INTELLIGIRILITY ORT TOTAL NO ERRORS BIT OF EFFECTS Reference:

Σ

-

S a

8 P S ]

2400

at

PLPC,

and

5

# 3

("A" 's): [Processor Configurations: LPC

("B" 's): [Speakers]

columns

of

Nr.

rows

of

Nr.

16= presentations] 2 × listeners × 4 = 00 from Scores Rates] 8883889999999 889389999999 8893649869 8893649869 889367739 8446966678097 846966678097 3332023333333333 00000000000000 404000440400 2000004404000 20000044000333 ("M"): [Total DRT Error #2050. [Eit #2051 .. Test ( s , Test 8838033723388 93800692-4828 388066224828 28806224838 8449622707684 replications rate. "J") rate. BPS. rows: levels error error 2400 by bit of of Values RH E LL CH L PK JE ΒV bit at Nr. Nr. Spkr Spkr Spkr Spkr Spkr Zero Spkr Spkr Spkr Spkr LPC 34

C PLP p UP  $\odot$ LP for Scores DRT Intelligibility S error bit with Data Table: Total S BP 2400 at T

PK JE

Spkr Spkr ΒV

Spkr

- continued.
S43
2400
P.T
PLPC
AND
LPC
FOR
SCORES
LITY
GIBIL
ELLI
INT
URT
TOTAL

(LPC at 2400 BPS-continued) 3% bit error rate. Test #2052. Spkr LL 79.17 80.21 77.08

85537766878777 0285977266777 71-05668787770 71-056878777004 71-05687877777 71-0568787877777 71-0568787877777777777777777777777777777777	<ul> <li>Каралариянски</li> <li>Каралар</li></ul>	866666688866 970202020 967777867867 9677778787878 967777878 967778778 96778778 96778778 96778778 96778778 96778778 96778778 96778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 9778778 97787778 97787778 977877777777
873 875 875 875 883 883 883 883 883 883 883 883 883 88	001-350-001-000-000-000-000-000-000-000-000-0	99999999999999999999999999999999999999
822 822 822 822 822 822 82 82 82 82 82 8	99073777 90037779 90037799 91039799 910562 91057 910057 91000000000000000000000000000000000000	24000000000000000000000000000000000000
02222222222222222222222222222222222222	66000 670 670 670 670 670 670 670	99999999999999999999999999999999999999
825-200 825-200 825-200 825-200 825-200 825-200 825-259 825-259	7002647459677 7002667459667 700267567667 7002677567 70027 700267 700267 700267 700267 700267 700267 70027 700700	30390000000000000000000000000000000000
77 79 79 79 79 79 70 70 70 70 70 70 70 70 70 70 70 70 70	# 20 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	t #20483
875828282828 7-50029-149228 7-50029-149229 8759265739 8759265739 875926523 875926523 875926523 8759255 8759255 8759255 8759255 875925 8759555 875955 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 8759555 87595555 87595555 87595555 87595555 87595555 87595555555555	e 74674606861264 74024406686264 750244066686264 7502448086844 75024486844 75024486844 75024486844 750244 75024 750	а с с с с с с с с с с с с с
0101288877778 0302429500453 00104440039350 0010444203092 0023480029	7 7 8 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	4 4 4 7 5 8 6 8 7 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8 8
kr LL kr RH kr CH kr JE kr BV kr BV	TTTTT BUPCRLE	ro bit kr CH kr CH kr CH kr JE kr JE
Spkr Spkr Spkr Spkr Spkr Spkr	* * * * * * * * *	Zero Spkr Spkr Spkr Spkr Spkr

TOTAL DRT INTELLIGIBILITY SCURES FOR LPC AND PLPC AT 2400 BPS - continued.

(FLPC at 2400 BPS - continued)


	000440040044 200000000000000	00000-00400- 0000-00400-	000808020000000000000000000000000000000
		42840-180888870 47847-78888880 47847-78888888	84468-508400 76666444788
	<pre>&gt;</pre>	00040000000000000000000000000000000000	20050000000000000000000000000000000000
	32023320332323 n	40000000000000000000000000000000000000	746666447474 746466447777 7464667680 7467680680 746768067880 7467660680788
	00000000000000000000000000000000000000	8387777888 2436777885 24897757885 2489755 258955 25955555 2595555 2595555 2595555 2595555 2595555 2595555 25955555 25955555 25955555555	90000000000000000000000000000000000000
	22222222222222222222222222222222222222	50000000000000000000000000000000000000	00000000000000000000000000000000000000
#2047.	3232200003230 307403000-34 4330006043340 04000103010340	* 2028882224 88882244 8229424282 222942428 222422 22242 2225 2225 2225 2225 2	# 2004 2004 2004 2004 2004 2004 2004 200
Test	98933988888888888888888888888888888888	Test 25225555 2522555555 25225555555555555	Tes 7777555555555555 777775555555555555 77777555555
error rate.	C C H H H K K K K K K K K K K K K K K K	error rate 80.21 80.21 80.21 80.22 80.22 80.22 80.22 79 79 79 79 79 70 70 70 70 70 70 70 70 70 70 70 70 70	error rate 772.924 11 772.924 772.925 733.966 661.466 661.466 682.755 v 668.755 v 771.67
1% bit	Spkr L Spkr R Spkr C Spkr J Spkr J Spkr B	3% bit Sykr L Spkr R Spkr P Spkr J Spkr B	5% bit Spkr L Spkr R Spkr C Spkr J Spkr J Spkr J

-
_
CEL
0
-
_
PER
0
_
OBS.
6
01
_
0
E
-
-
$\sim$
-
NCE
_
1.2
$\sim$
-
-
-
-
VARIA
$\sim$
-
-
-
-
_
1.
_
-
OF
~ .
-
I
SIS
IS
YSIS
YSIS
YSI:
LYSI
ISY JA
ALYSIS
ALYSI:
NALYSIS
NALYSIS
ANALYSIS
ANALYSIS
ANAL
ANAL
I ANAL
I ANAL
I ANAL
I ANAL
I ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
WAY ANAL
I ANAL
WAY ANAL
WAY ANAL


Reference: EFFECTS OF BIT ERRORS ON TOTAL DRT INTELLIGIBILITY SCORES FOR LPC AND PLPC AT 2400 8PS.

F ratio		96.31848 *** (p=.3999)	81.71143 *** (p=.9999)	1530.79623 *** (p=, 9999)	9.13665 *** (p=.9999)	3.12239 * (p=.3741)	6.80693 *** (p=.3999)	5.11698 *** (p=.9999)		
Mean Square	28,14066	1108.97008	940.79071	17624.93722	105.19552	35.94998	78.37211	58.91475	11.51357	
Sum of Squares	422.10998	1108.97008	4703.95355	52874.81167	525.97760	107.84994	1175.58178	683.72137	8117.07036	69920.04633
Oegrees of Freedom	15	ssors) <sup>1</sup>	ers) 5	) 3	us 5	ns 3	ns 15	ons 15	705	767
Source of Variance	Replications	"A" 's (processors) <sup>1</sup>	"b" 's (speakers) <sup>5</sup>	"C" 's (BER's)	AB Interactions	AC Interactions	BC Interactions	ABC Interactions	Error	Total


H. 2. Analysis of Variance Summary: Total DRT Intelligibility Scores.

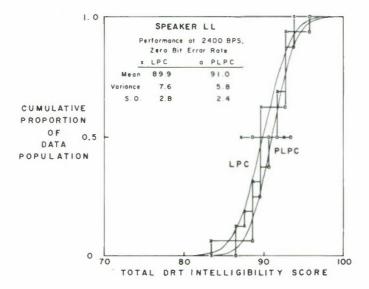


H.3.1. Comparison of distributions of total DRT intelligibility scores of Speaker LL: LPC-10 and PLPC at 2400 BPS.

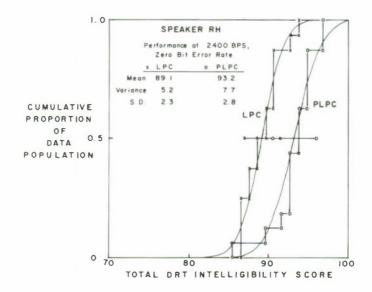


H. 3. 2. Comparison of distributions of total DRT intelligibility scores of Speaker RH: LPC-10 and PLPC, at 2400 BPS.

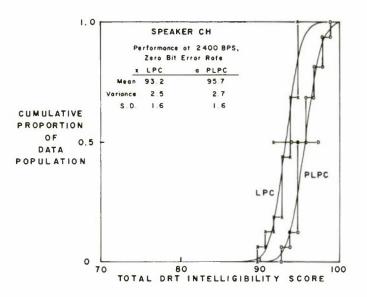


H.3.3. Comparison of distributions of total DRT intelligibility scores of Speaker CH: LPC-10 and PLPC, at 2400 BPS.

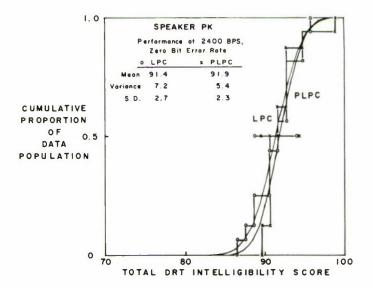


H.3.4. Comparison of distributions of total DRT intelligibility scores of Speaker PK: LPC-10 and PLPC, at 2400 BPS.

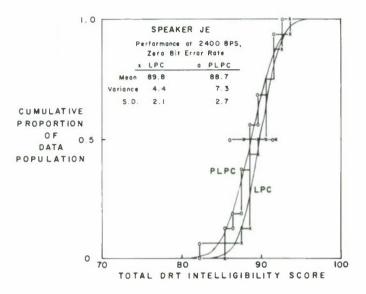


H.3.5. Comparison of distributions of total DRT intelligibility scores of Speaker JE: LPC-10 and PLPC, at 2400 BPS.

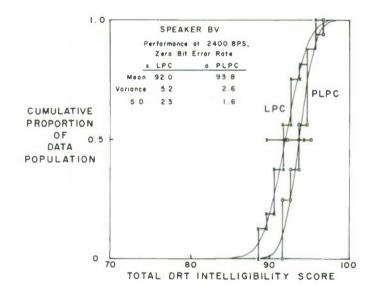


H. 3. 6. Comparison of distributions of total DRT intelligibility scores of Speaker BV: LPC-10 and PLPC, at 2400 BPS.

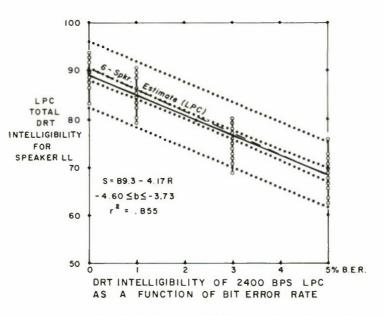


H. 4. I. A. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker LL, with LPC-10 at 2400 BPS. The 6-speaker regression line is also shown.

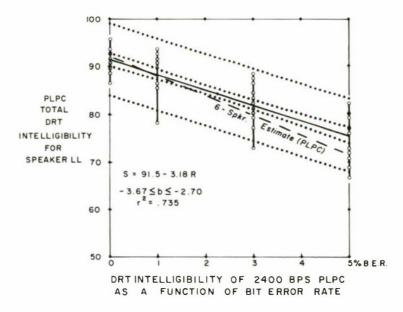

H.4.1.B. Scatter plot of scores, and linear regression model for the total DRT Intelligibility scores of Speaker LL, with PLPC at 2400 BPS. The 6-speaker regression line is also shown.

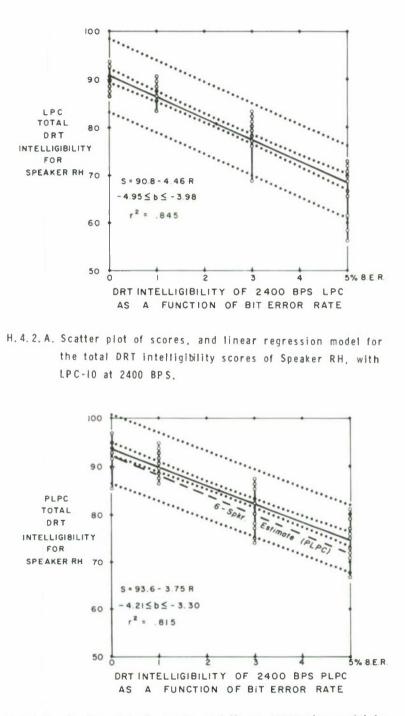


H.4.2.B. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker RH, with PLPC at 2400 BPS.

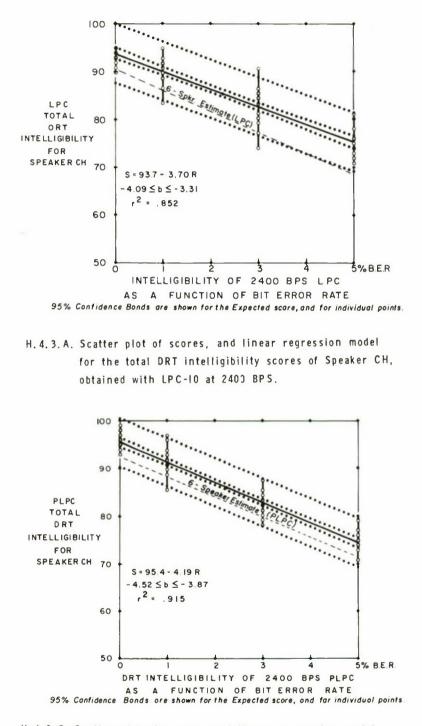


H. 4. 3. B. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker CH, obtained with PLPC at 2400 BPS.


-118-

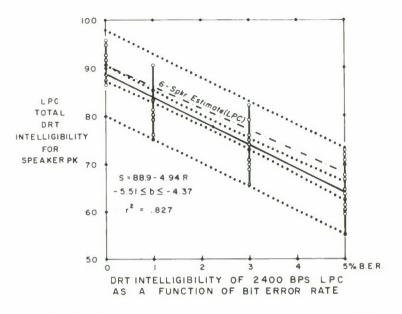


H. 4. 4. A. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker PK, obtained with LPC-10 at 2400 BPS.

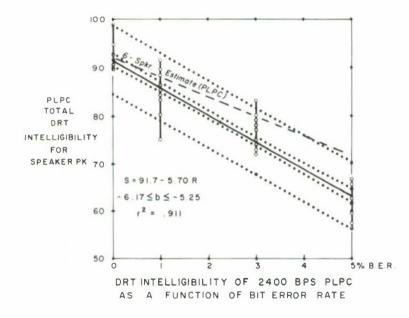

H. 4. 4. B. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker PK, obtained with PLPC at 2400 BPS.

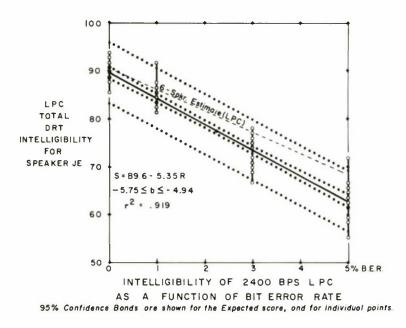



H.4.5.A. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker JE, obtained with LPC-10 at 2400 BPS.

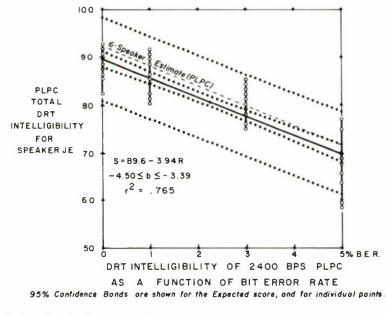


H.4.5.B. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker JE, obtained with PLPC at 2400 BPS.

-120-

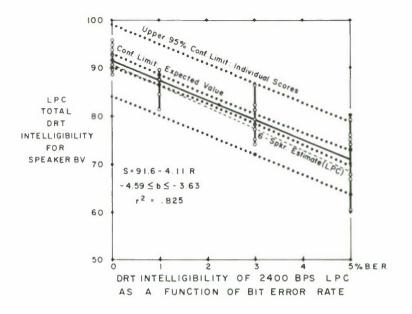



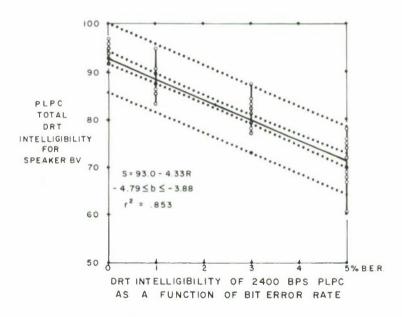

H.4.6.B. Scatter plot of scores, and linear regression model for the total DRT intelligibility scores of Speaker BV, obtained with PLPC at 2400 BPS.

### APPENDIX 1. STATISTICAL FORMULATIONS.

### I.l. Linear regression.

2...

Given an esnemble of paired measurement data Xi, Yi (i=1,2,....n) where the Xi are values of an independent variable (in this report, bit error rates expressed in percentage points) and the Yi are associated values of a dependent variable (here, intelligibility scores obtained at the specified bit error rates), the n values of X and Y can be characterized by sample means

$$\overline{X} = \frac{l}{n} \sum_{i}^{n} X_{i}$$
,  $\overline{Y} = \frac{l}{n} \sum_{i}^{n} Y_{i}$ 

estimating the "true" mean values  $\mu_x$ ,  $\mu_y$  of the sampled populations. Given the mean values, the datum points can be expressed in terms of deviations from the mean values:

$$x_i = (Xi - \overline{X})$$
,  $y_i = (Yi - \overline{Y})$ 

and sums of squared deviations from the means can be calculated:

$$\Sigma x^{2} = \Sigma (x - \overline{x})^{2} , \qquad \Sigma y^{2} = \Sigma (y - \overline{y})^{2}$$
$$= \Sigma x^{2} - (\Sigma x)^{2}/n \qquad = \Sigma y^{2} - (\Sigma y)^{2}/n$$

Sums of products of deviations can also be calculated

$$\Sigma_{XY} = \Sigma(X - \overline{X})(Y - \overline{Y}) = \Sigma_{XY} - (\Sigma_X)(\Sigma_Y)/n$$

leading to a determination of a sample regression coefficient expressing values of Y expected per unit of X:

## $b = \sum xy / \sum x^2$

The sample regression equation estimating values of Y in terms of X is expressed

### $\hat{Y} = \overline{Y} + bx$

or, in terms of deviations from the mean,

### $\hat{y} = bx$

In terms of the original units,

$$\hat{\mathbf{Y}} - \overline{\mathbf{Y}} = b(\mathbf{X} - \overline{\mathbf{X}})$$

The sum of squared deviations of values of the dependent variable Y from the regression line can be expressed

$$\sum dy. x^2 = \sum y^2 - \left[ (\sum xy)^2 / \sum x^2 \right]$$

leading to an expression for the mean square deviation

$$Sy.x^2 = \sum dy.x^2 / (n-2)$$

and an estimate of the standard deviation of the regression coefficient

 $s_b = s_{y.x}/\sqrt{\sum x^2}$  with (n-2) degrees of freedom. A test of significance of the slope b is given by

The sample regression coefficient b, an estimate of the "true" population regression slope  $\beta$  can be used in estimating a confidence interval for the "true" regression slope, based on the fact that

$$(b - \beta)/sb$$

follows Student's t-distribution with (n-2) degrees of freedom. Consequently a 95% confidence interval for the "true" regression slope can be expressed

# $b - t_{.05} s_b \leq \beta \leq b + t_{.05} s_b$

Based on an assumption that errors in estimating the elevation and the slope of the regression line are independent, their errors are uncorrelated, and the variance of the sum of the two errors is the sum of the two error variances. Consequently

$$\sigma_{\hat{y}}^2 = \sigma_{y.x}^2 (1/n + x^2/\sum x^2)$$

and the standard error in estimating the expected value  $\hat{\mathbf{Y}}$  is

$$S_{y}^{2} = S_{y,x} \sqrt{1/n} + (x^{2}/\Sigma x^{2})$$

with (n-2) degrees of freedom.

As a consequence, a confidence interval can be estimated for any  $\hat{\mathbf{Y}}$  estimating the "true" expectation  $\boldsymbol{\mu}$  :

 $\hat{Y} - t_{a;n-2} s_{\hat{y}} \leq \mu \leq \hat{Y} + t_{a;n-2} s_{\hat{y}}$ A confidence interval for estimating individual values of Y, given values of X, can also be established, based on an assumption that the mean square error in predicting individual Y can be expressed

$$S'_{y} = \frac{S_{y,x}}{n} + \frac{x^{2}S_{y,x}}{\Sigma x^{2}} + S_{y,x}^{2}$$

leading to a standard error for this prediction:

$$S'\hat{y} = S_{y,x} \sqrt{1 + 1/n} + \frac{x^2}{\sum x^2}$$

-123-

The corresponding 95% confidence interval for predicting individual datum points is

# $Y - t_{.05} S'_{\hat{y}} \le Y' \le Y + t_{.05} S'_{\hat{y}}$

In comparing regression lines obtained from different sample populations, the question arises whether the regression lines can be considered to be equivalent, in terms of their slopes, elevations, and/or residual variances (mean square deviations from their regression lines).

The residual variances of two regression lines can be compared with the two-tailed F-test, or for more than two regression lines, can be compared with Bartlett's test.

Assuming homogeneity of residuals, the slopes can be compared by means of the variance ratio of the mean squares: (Diff. between slopes)/("within" slopes), in conjunction with the F-test with 1 and k degrees of freedom, where k is the sum of the d.f. for deviations from regression, for the individual regression lines.

The mean square for "difference between slopes" is expressed

$$MS("diff") = \sum_{i} \sum_{2} (b_{i} - b_{2})^{2} / (\sum_{i} + \sum_{2})$$

where  $\Sigma_{i}, \Sigma_{2}$  are the values of  $\Sigma_{x}^{2}$  for two regression lines.

With more than two regression lines,

MS(diff.between slopes) =  $\sum w_i (b_i - \bar{b})^2$ 

where  $w_i = 1/\Sigma_i$ ,  $\overline{b} = \sum w_i b_i / \sum w_i$ 

(The sum of squares of deviations of the b's is a weighted sum, because the variances of the b<sub>i</sub>, namely  $\sigma_{y,x}^2/\Sigma_i$  depend on the values of  $\Sigma x^2$ ).

The linear regression model assumes the existence of populations of intelligibility scores related to specified bit error conditions, the relationship being such that average scores at each bit error rate condition lie on a straight line, the population regression line, defined

 $\mu = a + \beta(x - x) = a + \beta x$ 

where  $\boldsymbol{a}$  and  $\boldsymbol{\beta}$  are parameters.

The parameter  $\boldsymbol{a}$  is the mean score at x = 0, specifying the elevation of the regression line when  $\boldsymbol{x} = \boldsymbol{\overline{x}}$ .

The value of  $\boldsymbol{\beta}$  ,the slope of the regression line, is negative for

these data, since an increase in bit error rate caused a decrease in intelligibility scores. In this context, the slope parameter b has the nature of a figure of merit that estimates susceptibility of a processor/speaker/intelligibility feature combination to the effects of bit errors.

The linear regression equations for total intelligibility scores as a function of bit error rate represented the composite average relationship based on intelligibility scores of all of the speakers, and all of the intelligibility features. The data for individual speakers involved identical numbers of sample points at each bit error rate, for each speaker. Consequently the value of  $\sum x^2$  was identical in the normal regression equations for each speaker's scores. The result of this identity was that the values of slope and elevation in the regression equation for the average performance of all speakers were the average values of the slopes and elevations respectively of the individual speakers.

A similar effect occurred in regard to scores for individual intelligibility features (averaged across all speakers). Here also there were identical values of  $\sum x^2$  in the equations for each intelligibility feature; this identity resulted in the values of slope and elevation in the regression equation for total intelligibility being the averages of the slopes and elevations respectively of regression equations for the individual feature scores.

The linear regression formulation is based on

 $Y = \alpha + \beta_X + \epsilon$ 

with values of the dependent variable expressed as a linear sum of three terms, the error term  $\epsilon$  representing a normally distributed random variable, independent of x, with zero mean and standard deviation  $\sigma_{\rm Y,X}$ .

For any x,  $\hat{\mathbf{Y}}$  provides an estimate of the "true" expectation corresponding to the given x value. Since

 $\hat{Y} - \mu = (\bar{Y} - \alpha) + (b - \beta)x$ 

it is seen that difference between the estimate and the "true" expectation  $\mu$  has two sources, both due to the random term  $\epsilon$ : a difference of elevations, and a difference of slopes.

Thus the model is based on assumptions that the variance or spread of the distribution of values of the dependent variable (here, the intelligibility scores) is the same at every value of the independent variable (here, the bit error rate), and that the distribution of values of Y at each value of x is normal. These assumptions can be tested with tests for homogeneity of variance, and tests for conformity with a normal curve. Where the data distributions fail to conform with these assumptions, results of significance tests are in question. However, such results, taken in combination with an examination of the actual data distributions that occurred, may provide insights as to the nature and degree of relationship between the variables under examination.

### I.2. Lilliefor's Test for conformity with normal distribution.

The Lilliefor's test for goodness of fit is a statistic of the Kolmogorov-Smirnov type, in which a random sample from some unknown distribution is tested in order to test the null hypothesis that the unknown distribution is in fact a known, specified function, in this case, normally distributed.

The data population consisting of a random sample  $x_1 \ x_2 \ \dots \ x_n$  of size n is used to compute the sample mean:

$$\overline{X} = \frac{1}{n} \sum_{i=1}^{n} X_i$$

for use as an estimate of the "true" mean  $\mu$ , and the standard deviation:  $S = \sqrt{-\frac{1}{2} \frac{e}{E} (x_i - \overline{x}_i)^2}$ 

$$= \sqrt{\frac{1}{n-1} \sum_{i=1}^{n} (Xi - \overline{X})^2}$$

as an estimate of the "true" value of  $\sigma$ 

Sample points are converted to "normalized" sample values defined by

$$Zi = (\frac{Xi - X}{S})$$
  $i = 1, 2, ... n$ 

The test is computed from the Zi's rather than the original datum points. The normalized data, the Zi's defined above, are used in constructing a cumulative distribution function. The normal cumulative distribution is also constructed, based on the values of  $\mu$  and  $\sigma$ . The magnitude of the <u>difference</u> between the (normalized) data distribution and the normal ogive is calculated for each datum, to determine the maximum difference. This difference is the Lilliefor's test statistic, defined by

$$T_2 = Sup | F^*(x) - S(x) |$$

The decision rule in Lilliefor's test is to reject Ho at the approximate level of significance a if T2 exceeds a critical value set forth in Lilliefor's tables, which are published in Conover (1971) (see Bibliography).

For n>30 , the critical value for p = .95 is .886/ $\sqrt{n}$  . and for p= .99 is  $1.031/\sqrt{n}$  .

I.3. Bartlett's Test for homogeneity of variance.

Where more than two independent estimates of variance are to be tested to determine whether there are significant differences, a test has been provided by Bartlett, as follows.

If there are g estimates  $Si^2$ , each with the same number of degrees of freedom f, the test criterion is

$$M = Lf(g \log \overline{S}^2 - \sum \log Si^2)$$

where L is a constant 2.3026 = Ln(10).

On the null hypothesis that each  $si^2$  is an estimate of the same  $\sigma^2$ , the quantity M/C is distributed approximately as  $\chi^2$  with (g-1) degrees of freedom, where

$$C = 1 + \frac{g+1}{3 g f}$$

It has been observed that this test is sensitive to non-normality in the data, particularly to kurtosis. Data populations with a long "tail" to the distribution, i.e. with positive kurtosis, tend to result in biased results towards decisions of heterogeneity. I.4. Comparison of two data populations by paired samples.

In a pairwise analysis, the data to be analyzed is converted to a sample of n differences in measurement (in this case, differences between intelligibility scores taken pairwise). The members of each pair have one or more factors in common (in this analysis each pair were intelligibility scores from the same speaker, and at the identical bit error rate). Pairing has the effect of normalizing for average differences (such as the average differences between speaker means, and between mean scores at the various bit error rates) that might otherwise tend to obscure differences between the two entities under comparison (here, the LPC and PLPC voice processors).

The analysis of paired data involves assumptions that differences  $D_i$  between individual pairs are distributed about a mean  $\mu_D$ which represents the "true" average difference between the entities being compared.

The deviations  $D_i - \mu_D$  are assumed to be normally and independently distributed with population mean zero.

When these assumptions hold, the sample mean difference D is normally distributed about  $\mu_D$  with standard error  $\sigma_D \sqrt{n}$ where  $\sigma_D$  is the standard deviation of the population of differences.

The value of  $\sigma_D$  is estimated from  $S_D = \sqrt{\frac{\sum (D_i - \overline{D})^2}{D_i - 1}} = \sqrt{\frac{\sum D_i^2 - (\sum D_i)^2}{D_i - 1}}$ 

 $S_{\bar{D}} = S_D / \sqrt{n}$ and

provides an estimate of  $\sigma_{\overline{D}}$  based on n-1 degrees of freedom.

As a result, the quantity

 $t = (\bar{D} - \mu_D) / S_{\bar{D}}$ 

follows Student's t-distribution with n-l degrees of freedom, where n is the number of pairs, thus permitting confidence limits to be constructed for the mean difference, and tests of the null hypothesis (that the mean difference is zero).

$$\overline{D} - t_{\alpha;\nu} S_{\overline{D}} \leq \mu_D \leq \overline{D} + t_{\alpha;\nu} S_{\overline{D}}$$

-129-

### DISTRIBUTION LIST

ADTC(DLOSL) Eglin AFB, FL 32542 AF COMSEC Center San Antonio, TX 78243 ATTN: SRE (1 cy) ATTN: SRTEG-L(1 cy) AFCS(XP) Scott AFB, IL AUL/LSE-72-40 Maxwell AFB, AL 36112 CINCSAC(DC) Offutt AFB, NE 68113 CNO(OPNAV 967) US Navy Washington, DC 20350 ATTN: Mr. J. Boyd Commander (Code 5632.2) US Naval Missile Center Pt. Mugu, CA 93042 Commander, NELC San Diego, CA 92152 ATTN: Code 3400 (1 cy) ATTN: Research Library (1 cy) Commanding General US Army Electronics Command Ft Monmouth, NJ 07703 ATTN: AMSEL-GG-C (1 cy) ATTN: Mr. John Preusse (1 cy) DDC Cameron Station Alexandria, VA 22314 Defense Communications Engineering Center 1860 Wiehle Ave Reston, VA 22070 ATTN: Mr. J. Helms (2 cys)

Defense Communications Agency Courthouse Road Arlington, VA 22209 ATTN: Dr. Irwin Lebow Director, CIA Washington, DC 20505 ATTN: Mr. George Murray Director, Advanced Research Project Agency 1400 Wilson Blvd. Arlington, VA 22209 ATTN: Dr. R. Kahn Director, Naval Research Laboratory 4554 Overlook Ave SW Washington, DC 20390 ATTN: Mr. Lee Kline (2 cys) ATTN: Code 2627 (1 cy) DTACCS Washington, DC 20330 ATTN: Dr. Neal Burch ESD/DCF (2 cys) Hanscom AFB, MA 01731 ESD/DCB (1 cy) Hanscom AFB, MA 01731 ESD/DRI (2 cys) Hanscom AFB, MA 01731 ESD/MCE Stop 22 (10 cys) Hanscom AFB, MA 01731 ESD/WE Stop 7 Hanscom AFB, MA 01731 Hq Dept of the Army Washington, DC 20310 ATTN: DAMO-TCS Hq USAF Washington, DC 20330 ATTN: AFRDP (1 cy) ATTN: AFRDQ (1 cy) ATTN: KRCX (2 cys)

-131-

Hq AFSC Andrews Air Force Base Washington, DC 20331 ATTN: SDE( 1 cy) ATTN: DL ( 1 cy) Lincoln Laboratory Lexington, MA 02173 ATTN: Dr. Ben Gold (1 cy) ATTN: Documents Library (1 cy) Hq MAC(DC) Scott AFB, IL 62225 NASA Scientific and Technical Information Facility PO Box 8757 Baltimore-Washington Intl. Airport Baltimore, MD 21240 ATTN: Accessioning Branch Naval Air Development Center Warminster, PA 18974 ATTN: Mr. Bill Gibbons NAVELEX (Code 31034) Washington, DC 20360 ATTN: Mr. Jack Garner Commanding Officer, NESSEC 3801 Nebraska Ave NW Washington, DC 20390 ATTN: Code 21018 (1 cy) ATTN: Code 2102 (1 cy) Commander, Operational Test and Evaluation Force Norfolk, VA 23511 ATTN: Code 64 (1 cy) Redstone Scientific Information Center US Army Missile Command Redstone Arsenal, AL 35809 ATTN: Chief, Documents Rome Air Development Center Griffiss AFB, NY 13441 ATTN: DCL (1 cy) ATTN: Dr. Bruno Beek (1 cy) ATTN: Documents Library(TILD) (1 cy)

System Development Corporation 2500 Colorado Ave Santa Monica, CA 90406 ATTN: Librarian, 41-41 Hq SAMSO(DC) PO Box 92960 Worldway Postal Center Los Angeles, CA 90009 Hq TAC Langley AFB, VA 23665 ATTN: DRC (1 cy) ATTN: XPSY(1 cy) ATTN: DRAV (1 cy) ATTN: DC (1 cy) The MITRE Corporation PO Box 208 Bedford, MA 01730 ATTN: Documents Library (1 cy) ATTN: Mr. John Roberts, D8 (10 cys) TRI-TAC Program Office Ft Monmouth, NJ 07703 ATTN: Mr. L. Diedrichsen, Code TT-E-S Institute for Defense Analysis, Communications Research Division Thauet Rd Princeton, NJ 08540 ATTN: Dr. Thomas Crystal ESD/XR (Dr. Donald Brick) Hanscom AFB, MA 01731 Bell Telephone Laboratories 600 Mountain Avenue Murray Hill, New Jersey 07974 ATTN: Dr. James L. Flanagan (1 cy) ATTN: Dr. David J. Goodman (1 cy) Bolt, Beranek and Newman , Inc. Moulton St. Cambridge, Mass. 02138 ATTN: Dr. John Makhoul Dynastat, Inc. 2704 Rio Grande Austin, TX 78705 ATTN: Dr. William Voiers -133KETRON, Inc. Valley Forge Executive Mall Bldg. 10, Suite 216 530 East Swedesford Rd. Wayne, Pennsylvania 19087 ATTN: Mr. Charles Teacher

Harris Corporation P.O.Box 37 Melbourne, Florida 32901 ATTN: Mr. L.E.Cassel

Georgia Institute of Technology School of Electrical Engineering Atlanta, Georgia 30332 ATTN: Dr. Thomas P. Barnwell

Computer Science Department University of Utah Salt Lake City, Utah 84112 ATTN: Dr. Steven F. Boll

Speech Communications Research Laboratory 800A Miramonte Drive Santa Barbara, California 93109 ATTN: Dr. John D. Markel

Electrical Engineering Department North Carolina State University Raleigh, NC 27607 ATTN: Dr. J.B.O'Neal, Jr.

Research Laboratory of Electronics Massachusetts Institute of Technology Cambridge, Mass. 02139 ATTN: Dr. Dennis Klatt

GTE SYLVANIA, Inc. Electronic Systems Group 77 "A" Street Needham, Mass. 02194 ATTN: Dr. Aaron J. Goldberg

Joint Speech Research Unit Eastcote Road Ruislip, Middlesex, U.K. ATTN: Dr. John Holmes ITT, Inc. Defense Communications Division 492 River Road Nutley, New Jersey 07110 ATTN: Dr. Marvin A. Epstein

TRW, Inc. Systems Group One Space Park Redondo Beach, California 90278 ATTN: Dr. H. Tsou

### RCA

Defense Electronic Products Front and Cooper Streets Camden, New Jersey 08102 ATTN: Willard Meeker

E-Systems, Inc. P.O.Box 6118 Garland, Texas 75041 ATTN: D. Fulghum

Texas Instruments, Inc. Central Research Laboratory P.O.Box 6015 MS 208 Dallas, Texas 75222 ATTN: Dr. Richard Wiggins (2 cys)

Haskins Laboratories 270 Crown Street New Haven, Conn. 06511 ATTN: Dr. Franklin S. Cooper

☆ U. S. GOVERNMENT PRINTING OFFICE: 1978--700-031--140