

AD-A051 376

NAVY ELECTRONICS LAB SAN DIEGO CALIF
EQUIPMENT FOR A PULSE METHOD OF SOUND VELOCITY MEASUREMENT IN R--ETC(U)
DEC 61 - G SHUMWAY, S H ABERNETHY

F/G 20/1

UNCLASSIFIED

NEL-TM-517

NL

| OF |

AD
A051 376



END

DATE

FILMED

4-78

DDC

1622AA 0539 3428 3426
MOST Project - 2 S-ROO 03 01, Task 0539

This is a basic Paper

PROBLEM/NEL 14-1

1

Technical Memorandum No. TM-517

12

14p

11

26 Dec 1961

date

14

NEL-TM-517

AD A 051376

Good

16

EQUIPMENT FOR A PULSE METHOD OF SOUND VELOCITY MEASUREMENT
IN ROCK AND SEDIMENT

10

G. Shumway S. H. Abernethy

2252
code

9

Technical memo

16 SR 00403

17 SR 0040301

DDC
REGISTERED
MAR 16 1978
A

DISTRIBUTION STATEMENT A
Approved for public release
Distribution Unlimited

U. S. Navy Electronics Laboratory, San Diego 52, California

The opinions expressed herein are those of the author(s) and are not necessarily the official views of the Navy Electronics Laboratory.
If cited in the scientific literature, this document should be described as an unpublished memorandum.

8-11

253550

set

NEL/Technical Memorandum 517

EQUIPMENT FOR A PULSE METHOD OF SOUND
VELOCITY MEASUREMENT IN ROCK AND SEDIMENT

by

George Shumway and S. H. Abernethy

This memorandum has been prepared because it is believed that the information may be useful in this form to others at NEL and to a few persons and activities outside of NEL. This memorandum should not be construed as a report, as its only function is to present for the information of others a portion of the work which was done on the above-mentioned problem.

ACCESSION FOR	
NTIS	Write Section <input checked="" type="checkbox"/>
REC	Dist Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
<i>per file on file</i>	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. CODE/SPECIAL
<i>A</i>	

DDC
RECEIVED
MAR 16 1978
A

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

↘ The most frequently used laboratory technique for measuring the velocity of compressional elastic waves in rock specimens, sediments, and other materials is the so-called pulse method in which the travel time of acoustic pulses over a known path length in a specimen is determined. Resonance techniques have been used to good advantage also, however. Each method has certain advantages and disadvantages that must be reckoned with.

Resonance methods have been used not only for measuring compressional velocities in rock samples, but also for measuring torsional wave velocities and sound absorption (Ide, 1935; Ide, 1936; Birch, 1937; Ide, 1937; Birch and Bancroft, 1938; Birch and Bancroft, 1940; Birch, 1943). Resonant methods were used to study the elastic properties of soils and sands by Ishimoto and Iida (1936, 1937), Iida (1938, 1940), and Shumway (1956, 1958, 1960). Resonance methods as they have been used employ acoustic frequencies in the audio range whereas pulse methods used in the laboratory employ much higher acoustic frequencies. An advantage of the resonance method is that a measure of mechanical Q , and therefore a measure of the absorption of sound, is readily obtained even on a relatively small sample, whereas with the pulse method extra equipment must be set up for making sound absorption measurements, and a somewhat larger sample must be used.

Pulse methods have been used by a number of people, including Hughes and Jones (1950), Hughes and Cross (1951), Hughes and Jones (1951), Hughes and Kelly (1952), Wyllie, Gregory and Gardner (1956), Paterson (1956), Laughton (1954, 1957), Sutton, Berckhemer and Nafe (1957), and Busby and Richardson (1957). The pulse method is readily used for studies at high pressures.

The pulse equipment described here was set up to be a permanent facility of the Sea Floor Studies Section, for use both with rocks and other solid materials, and with sediments. A water-jacket is provided so that water-saturated sediments and rocks can be measured.

The equipment basically consists of two transducers, one of which supplies acoustic pulses to the sample being measured and the other receiving the pulses after they have traveled a certain distance through the sample (Figs. 1 and 2). The received signal is displayed on an oscilloscope screen and the travel time determined there by the operator who picks the first arrived signal by eye. The transmitting transducer is activated by pulses from a General Radio Company Unit Pulser, Type No. 1217-A, with Unit Power Supply Type No. 1203-A. A Du Mont Type 256-D cathode-ray oscilloscope serves well for the signal display. This ancient instrument, of World

War II vintage, has a movable marker controlled by a dial calibrated in microseconds, which makes it possible to determine delay (travel) times directly, and more accurately than could be done on a scope not having this movable marker feature.

The pulser is operated at a pulse repetition rate of either 200 c/s or 500 c/s, and a pulse duration lying between 500 and 2000 microseconds is used. The output of the receiving transducer is amplified by a Hewlett Packard Model 450A amplifier before being fed to the video input of the oscilloscope.

The upper transducer is connected to a hydraulic ram which makes it possible to squeeze the sample between the two transducers to whatever degree is necessary to assure good acoustic coupling.

The transducers consist of discs of barium titanate 20.6 mm in diameter and about 6 mm thick. These are mounted in a cast plastic which fills conical cavities in the stainless steel mounts that are used (Fig. 3). The conical cavities serve as horns to minimize possible troublesome sound radiation from the back surface of the transducers.

When the water jacket is filled with water a specimen held between the transducers is totally immersed. This makes

it possible to work with water-saturated porous rocks and other materials. It can be difficult to completely resaturate a porous fine-grained rock once it has partially dried out, hence it is desirable when working with wet specimens to keep them immersed almost continuously. By collecting rock samples underwater, drilling cores from them in the laboratory while they are immersed, and then measuring their sound velocities while immersed, problems of the introduction of air are eliminated. The presence of water in the water jacket should not, and apparently does not, affect the travel time of the first arrived signal to any extent noticeable or measurable, provided the sample has a sound velocity greater than that of water. If the sample's sound velocity be less than that of water then the presence of water will provide a possible sound path between transducers with a shorter travel time than that through the sample, and the measured sound velocity may not represent the sample. Among earth materials, only high-porosity unconsolidated silt and clay sediments are likely to have sound speeds less than water, and of necessity these will be confined in a container for measurement, so the problem of water need not arise.

A series of lucite rods one inch in diameter and of varying lengths between 0.5 and 8 inches were used to verify the operation

of the apparatus (Fig. 4). Travel times through the various rods as a function of length produced a linear $\frac{t}{L}$ relationship which terminates at a zero travel time for a zero sample length and which has a slope representing a sound speed of 8890 ft/s.

REFERENCES

- Birch, Francis (1937) The effect of pressure on the modulus of rigidity of several metals and glasses: *Jour. App. Phys.*, v. 8, p. 129-133.
- Birch, Francis, and D. Bancroft (1938) Elasticity and internal friction in a long column of granite: *Bull. Seismological Soc. Amer.*, v. 28, p. 243-254.
- Birch, Francis, and D. Bancroft (1940) New measurements of the rigidity of rocks at high pressure: *Jour. Geology*, v. 48, p. 752-766.
- Birch, Francis (1943) Elasticity of igneous rocks at high temperatures and pressures: *Bull. Geol. Soc. Amer.*, v. 54, p. 263-286.
- Busby, J., and E. G. Richardson (1957) The absorption of sound in sediments: *Geophysics*, v. 22, p. 821-828.
- Hughes, D. S., and J. H. Cross (1951) Elastic wave velocities at high pressures and temperatures: *Geophysics*, v. 16, p. 577-593.
- Hughes, D. S., and H. J. Jones (1950) Variation of elastic moduli of igneous rocks with pressure and temperature. *Bull. Geol. Soc. Amer.*, v. 61, p. 843-856.
- Hughes, D. S., and H. J. Jones (1951) Elastic wave velocities in sedimentary rocks: *Trans. Amer. Geophys. U.*, v. 32, p. 173-178.

- Hughes, D. S., and J. L. Kelly (1952) Variation of elastic wave velocity with saturation in sandstone: *Geophysics*, v. 17, p. 739-752.
- Ide, J. M. (1935) Some dynamic methods for determination of Young's modulus: *Rev. Sci. Instruments*, v. 6, p. 296-298.
- Ide, J. M. (1936) Comparison of statically and dynamically determined Young's modulus of rocks: *Proc. Nat. Acad. Sci.*, v. 22, p. 81-92.
- Ide, J. M. (1937) The velocity of sound in rocks and glasses as a function of temperature: *Jour. Geology*, v. 45, p. 689-716.
- Iida, Kumizi (1938) The velocity of elastic waves in sand: *Bull. Earthquake Res. Inst., Tokyo Imperial Univ.*, v. 16, p. 131-144.
- Iida, Kumizi (1940) On the elastic properties of soil, particularly in relation to its water content: *Bull. Earthquake Res. Inst., Tokyo Imperial Univ.*, v. 18, p. 675-691.
- Ishimoto, M., and K. Iida (1936) Determination of elastic constants of soils by means of vibration methods, Pt. 1. Young's modulus: *Bull. Earthquake Res. Inst., Tokyo Imperial Univ.*, v. 14, p. 632-657.
- Ishimoto, M., and K. Iida (1937) Determination of elastic constants of soils by means of vibration methods, Pt. 2. Modulus of rigidity and Poisson's ratio: *Bull. Earthquake Res. Inst., Tokyo Imperial Univ.*, v. 15, p. 67-86.

- Laughton, A. S. (1954) Laboratory measurements of seismic velocities in ocean sediments: Proc. Royal Soc., A, v. 222, p. 336-341.
- Laughton, A. S. (1957) Sound propagation in compacted ocean sediments: Geophysics, v. 22, p. 233-260.
- Paterson, N. R. (1956) Seismic wave propagation in porous granular media: Geophysics, v. 21, p. 691-714.
- Shumway, Geo. (1956) A resonant chamber method for sound velocity and attenuation measurements in sediments: Geophysics, v. 21, p. 305-319.
- Shumway, Geo. (1958) Sound velocity vs. temperature in water-saturated sediments: Geophysics, v. 23, p. 294-505.
- Shumway, Geo. (1960) Sound speed and absorption studies of marine sediments by a resonance method: Geophysics, v. 25, Part I p. 451-467, Part II, p. 659-682.
- Sutton, G. H., H. Berckhemer, and J. E. Nafe (1957) Physical analysis of deep sea sediments: Geophysics, v. 22, p. 779-812.
- Willie, M. R. J., A. R. Gregory, and L. W. Gardner (1956) Elastic wave velocities in heterogenous and porous media: Geophysics, v. 21, p. 41-70.

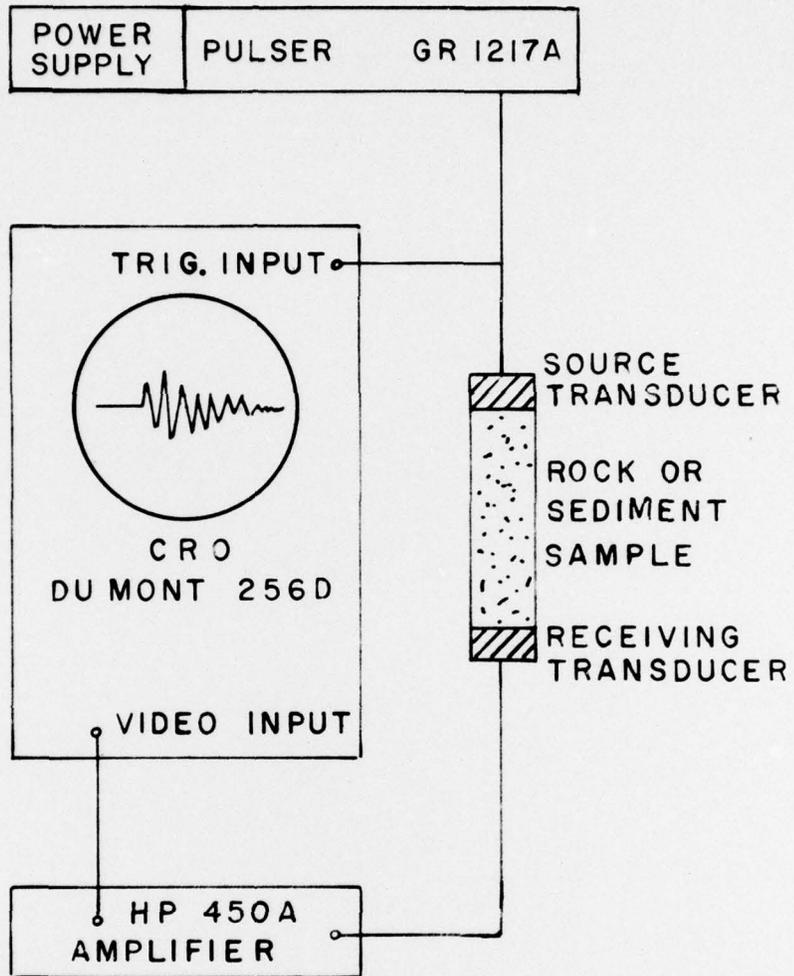


FIG. 1. COMPONENTS OF SOUND VELOCITY APPARATUS

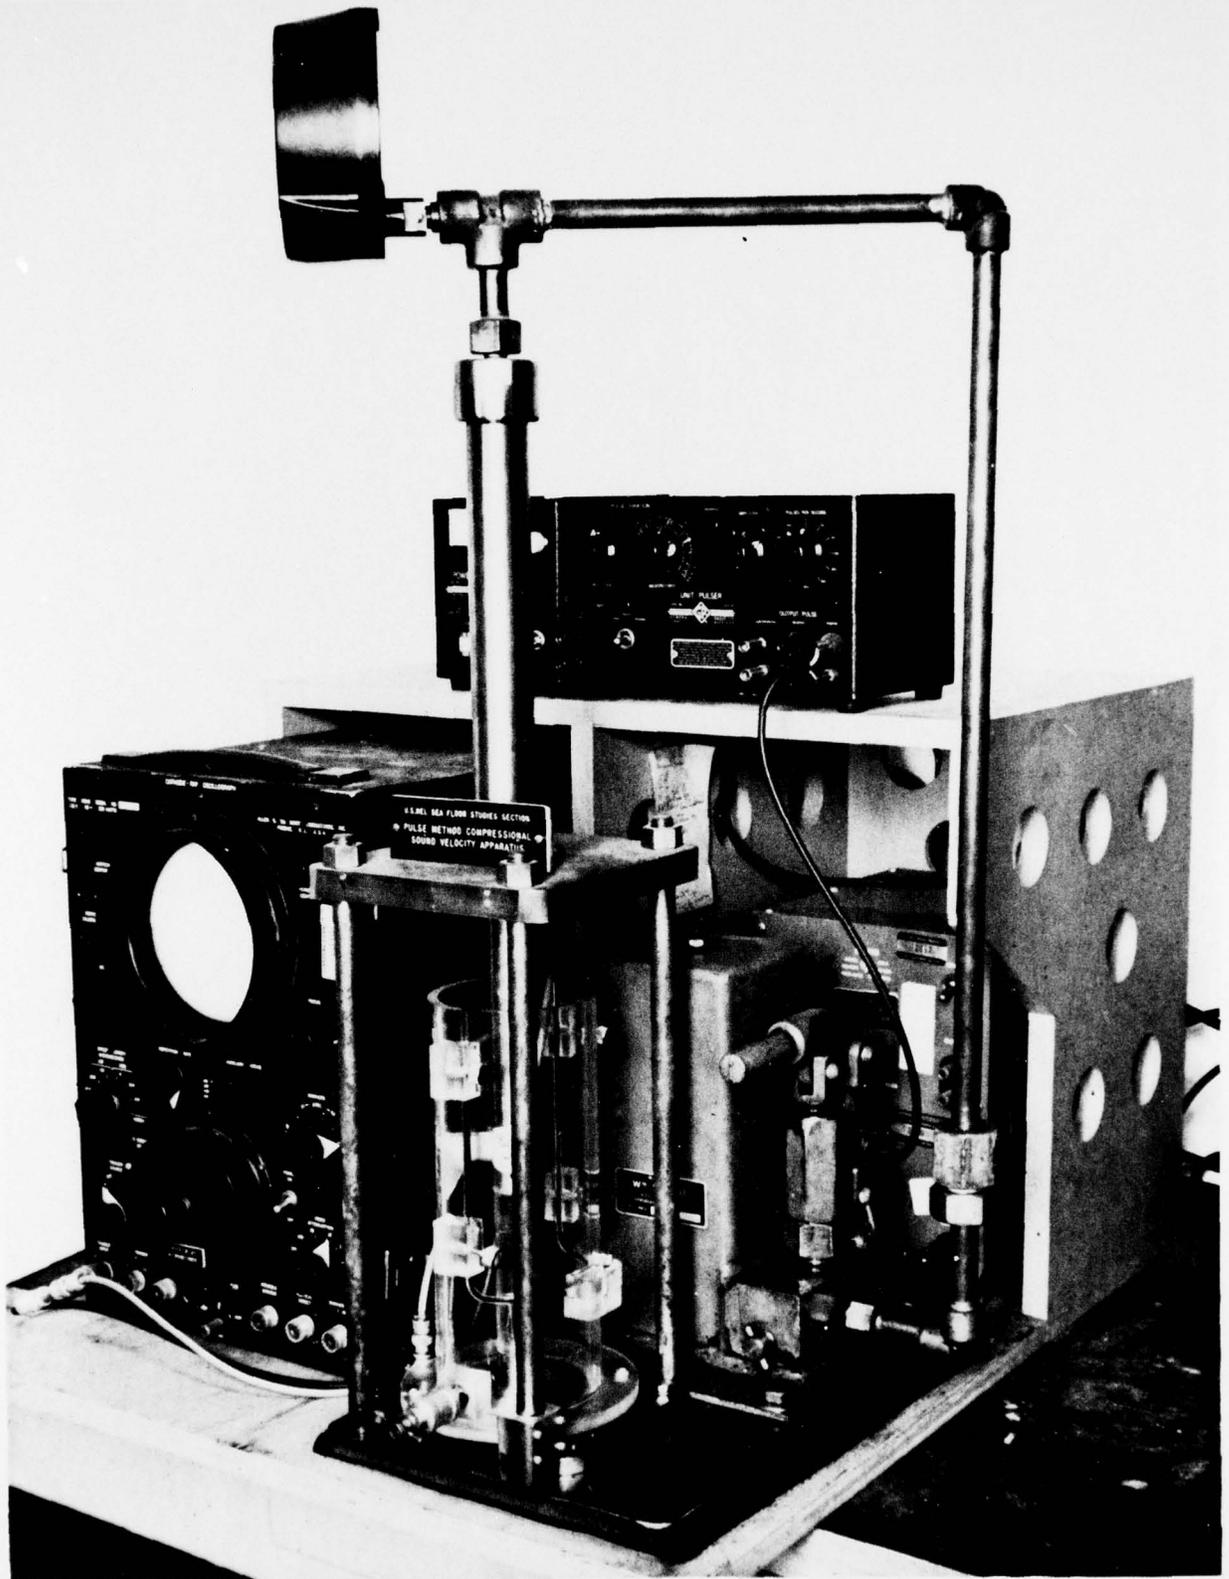


FIG. 2 PULSE METHOD SOUND VELOCITY APPARATUS

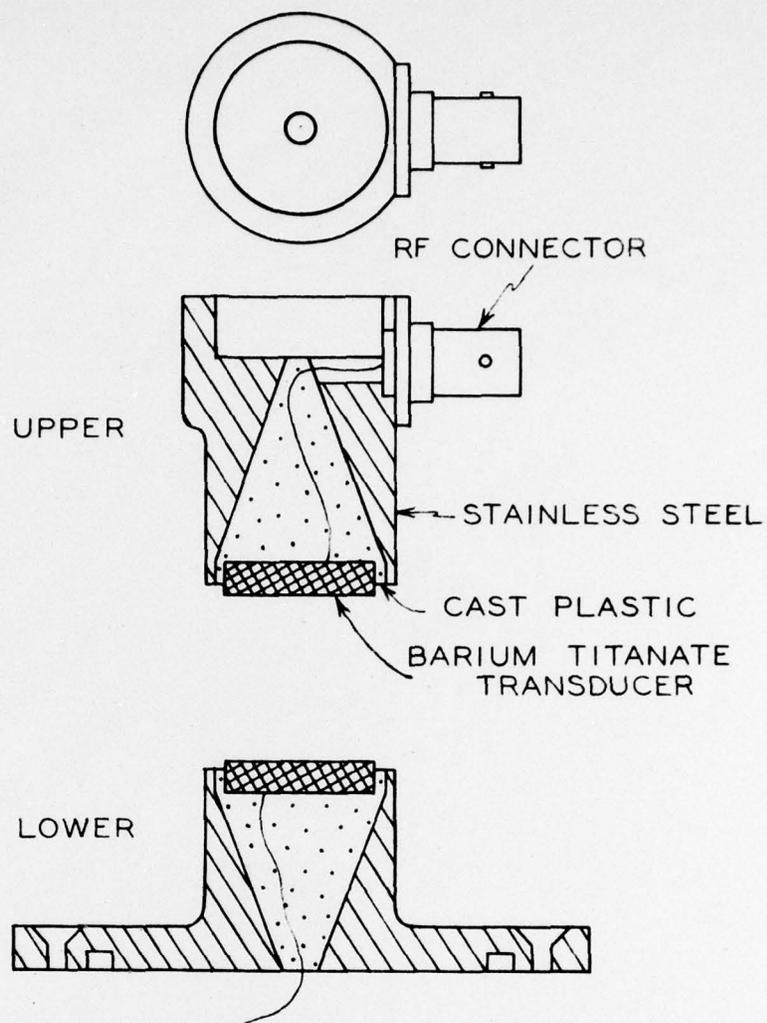


FIG. 3. TRANSDUCERS AND MOUNTS

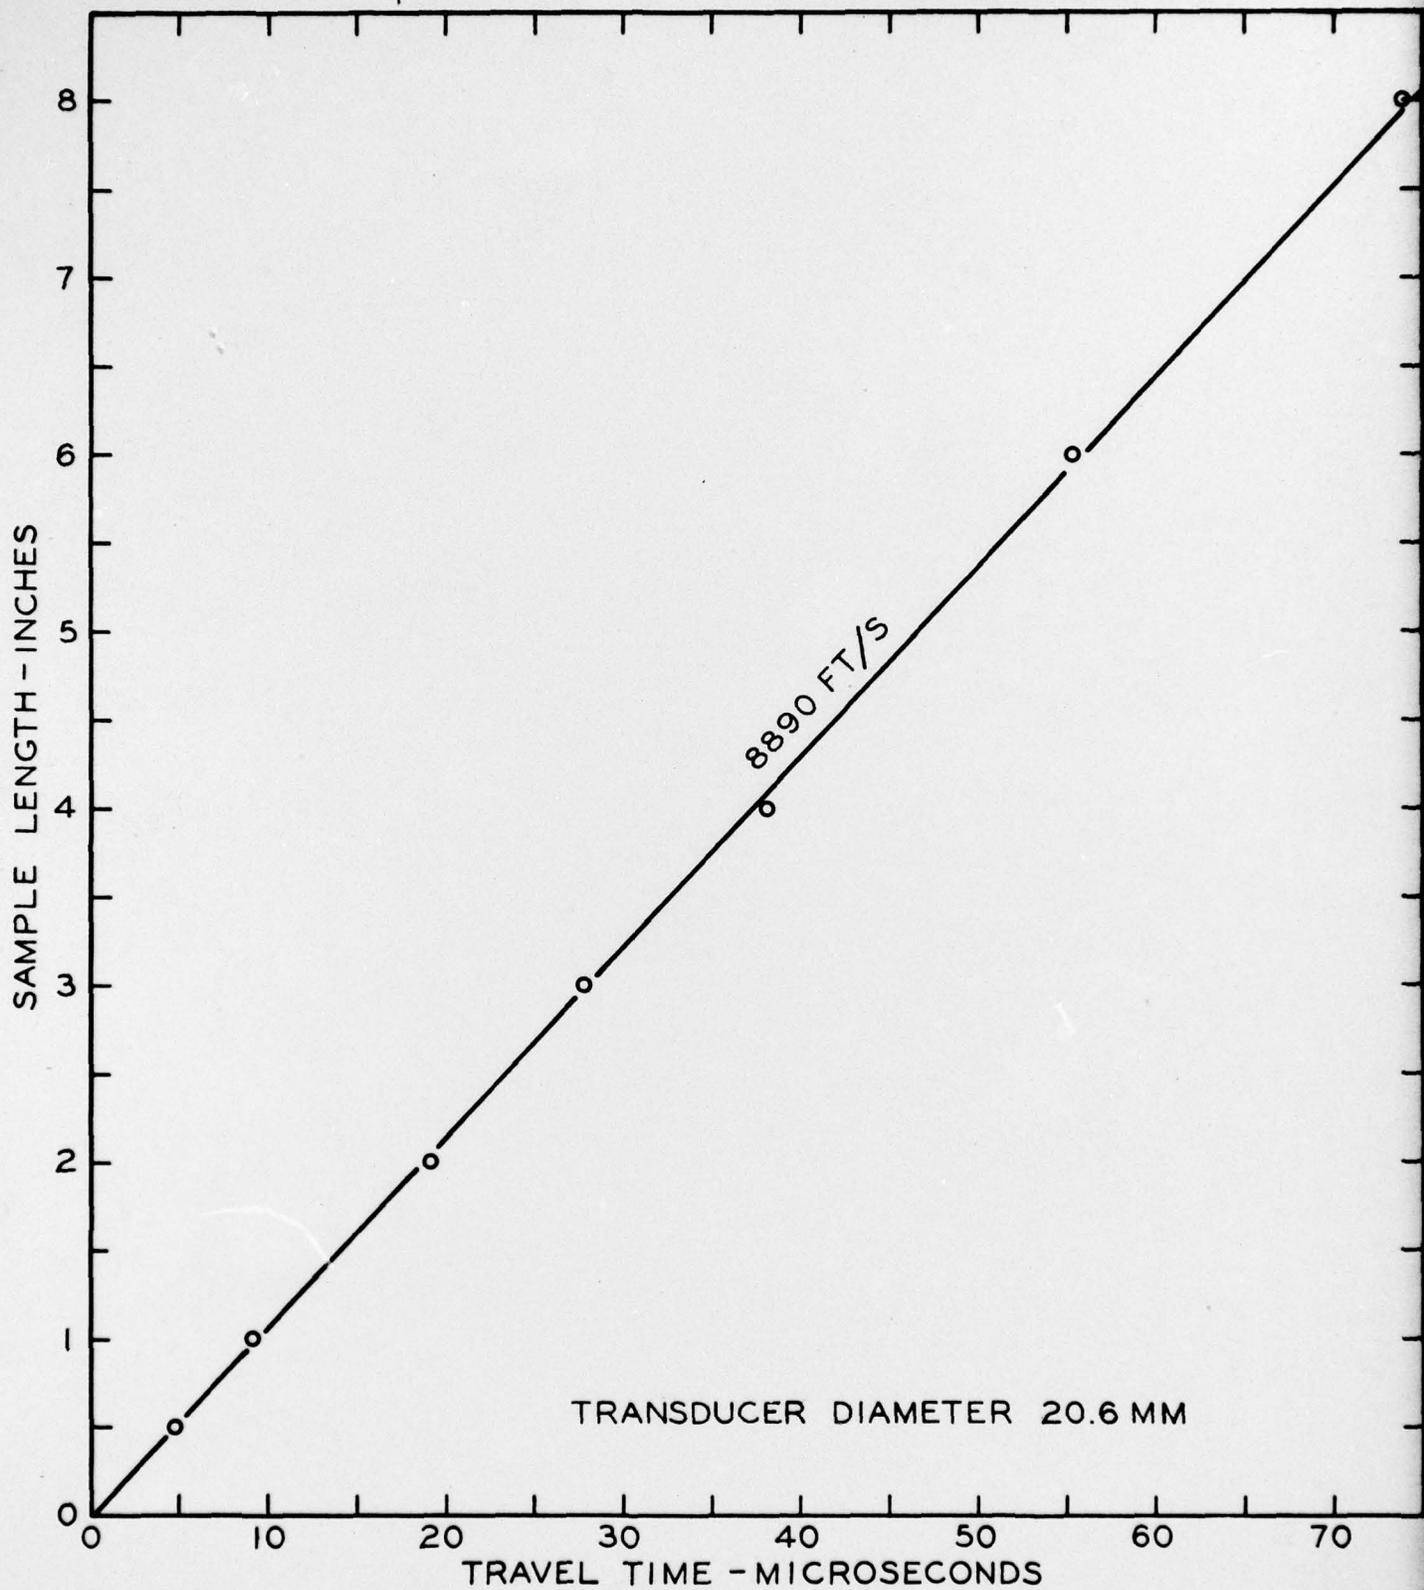


FIG. 4. SOUND TRAVEL TIME THROUGH LUCITE RODS 1 IN. DIAMETER