

AD-A053 331

GENTEX CORP CARBONDALE PA
OPTIMIZATION OF THE MATERIAL FOR CONSTRUCTION OF THE NEW PROTEC--ETC(U)
SEP 77 J P DAUGHERTY

DAAA15-75-C-0175

F/G 6/17

ARCSL-CR-77046

NL

UNCLASSIFIED

1 OF 1
AD
A053331



1-5
10/4
S/E

12

AD A 053331

CONTRACTOR REPORT ARCSL-CR-77046

OPTIMIZATION OF THE MATERIAL
FOR CONSTRUCTION OF THE NEW
PROTECTIVE MASK

FINAL REPORT

BY

J. P. Daugherty

September 1977

GENTEX CORPORATION
Carbondale, Pennsylvania 18407

Contract No. DAAA15-75-C-0175

AD No. []
DDG FILE COPY

DDC
RECEIVED
APR 28 1978
B



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
Chemical Systems Laboratory
Aberdeen Proving Ground, Maryland 21010

Approved for public release; distribution unlimited

Disclaimer

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Disposition

Destroy this report when no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

19 REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1 AUTHOR	2 GOVT ACCESSION NO.	3 RECIPIENT'S CATALOG NUMBER	
28 ARCSL-CR-77046			
4 TITLE (and Subtitle)		5 TYPE OF REPORT & PERIOD COVERED	
6 OPTIMIZATION OF THE MATERIAL FOR CONSTRUCTION OF THE NEW PROTECTIVE MASK		91 Final Report July 1975 - July 1976	
7 AUTHOR(s)		6 PERFORMING ORG. REPORT NUMBER	
10 John P. Daugherty			
9 PERFORMING ORGANIZATION NAME AND ADDRESS		8 CONTRACT OR GRANT NUMBER(s)	
Gentex Corporation P. O. Box 315 Carbondale, Pennsylvania 18407		15 DAAA15-75-C-0175 ^{clw}	
11 CONTROLLING OFFICE NAME AND ADDRESS		10 PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
Director Chemical Systems Laboratory Attn: DRDAR-CLJ-I Aberdeen Proving Grounds, Maryland 21010			
14 MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12 REPORT DATE	
Director Chemical Systems Laboratory Attn: DRDAR-CLW-P Aberdeen Proving Ground, Maryland 21010 (CPO - Mr. J. Mok 671-3705)		11 SEP 1977	
		13 NUMBER OF PAGES	
		12 51 p.	
		15 SECURITY CLASS. (of this report)	
		Unclassified	
		15a DECLASSIFICATION/DOWNGRADING SCHEDULE	
		NA	
16 DISTRIBUTION STATEMENT (of this Report)			
Approved for public release; distribution unlimited			
17 DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18 SUPPLEMENTARY NOTES			
19 KEY WORDS (Continue on reverse side if necessary and identify by block number)			
Optical properties	EPDM & EPR elastomer	Irradiation	Cure rate
Physical properties	Elastomer	Toroidal lens	Scorch rate
Curing temperature	Polyurethane	Lens Outsert	Strata
Curing pressure	Processability	Brabender	
Silicone elastomer	Contaminates	Rheology	
20 ABSTRACT (Continue on reverse side if necessary and identify by block number)			
Dow Corning's X4-2665 Silicone material provides an optical-and physical-property-wise satisfactory material for face masks. Production must observe critical processing and eliminate contaminates to provide a cost acceptable product. Prior to incorporation of this material into a full face mask, a lens design modification is required to provide optical clarity in the as-worn position. ↑			

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

405 096

8

PREFACE

This work was performed under Contract DAA^A15-75-C-0175 with Edgewood Arsenal, Aberdeen Proving Ground, Maryland, from July 1, 1975 to July 13, 1976 by Gentex Corporation, Carbondale, Pennsylvania 18407.

The use of trade names in this report does not constitute an official indorsement or approval of the use of such commercial hardware or software. This report may not be used for purposes of advertisement.

Reproduction of this document in whole or in part is prohibited except with permission of the Director, Chemical Systems Laboratory, Attn: DRDAR-CLJ-I, Aberdeen Proving Ground, Maryland 21010; however, DDC and the National Technical Information Service are permitted to reproduce the document for U. S. Government purposes.

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION _____	
BY _____	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL and/or SPECIAL
A	

SUMMARY

As part of the development of a new Face Mask, Edgewood Arsenal selected a silicone rubber as their prime candidate. This material has good clarity, flexibility and a wide temperature capability. Drawbacks are; poor scratch resistance, aging discoloration and poor impermeability. The objective of this project was to evaluate the polymer rheology, curing behavior, physical and optical properties of Dow Corning silicone X4-2665. The Toroidal lens mold was used extensively in this evaluation. Several other elastomers, such as, polyurethane, EPDM (ethylene propylene diene terpolymers) and EPR (ethylene propylene copolymers) were evaluated in an effort to improve on the barrier and abrasion resistance property deficiencies of silicone.

Initial work involved EPDM, EPR and polyurethane elastomers, but all of these materials were discarded as Face Mask candidates due to insurmountable problems with either optical quality or molded physical properties. Polyurethane (Pellethane 2363-80A) lens Outserts were molded using Gentex' visor mold as a substitution for the polyurethane Toroidal lens requirements. The silicone Toroidal lens requirements were increased to include the EPDM and flat lens requirements.

During the remainder of this project, we were able to establish processing parameters for the production of optically good Toroidal lenses with the GFM transfer mold in a Carver 100-ton press and processing the silicone on a 6-inch x 12-inch laboratory 2-roll mill.

Cure times were reduced to a minimum of four minutes with a change time of 3.5 minutes for a total cycle time of 7.5 minutes, using lot numbers 004 and 005 of Dow Corning's X4-2665 silicone. It would be possible to reduce the cure time more with heat-cored molds to reduce mold cooldown.

High reject rates were generally caused by material contamination or by improper molding conditions. Contamination rejects can be due to, or occur in, the virgin elastomer, machine or airborne and/or dirty mold. The elastomer lots from 003 - 007 that we have evaluated appeared to be very clean and were a very minor source of contamination.

In order to combat high reject rates from the remaining contaminants, there is a need for an exceptionally clean area with positive pressure and preferably laminar air flow. All precautions of extreme cleanliness should be taken including thorough vacuuming of the room and equipment followed by a damp cloth wipe. Proper clothing should be supplied including hats and gloves. A method for checking the cleanliness is to use a "black light" (ultraviolet) in a darkened area.

Flow lines and, in excessive cases, "orange peel" can be a major reject caused by improper molding temperatures and/or press pressures. Molding temperatures are critical and may have to be varied for different lots of material, age of compounded stock and/or total processing heat history of the accelerated compound.

Physical properties of different lots of X4-2665 appeared to be very consistent when post-cured. Non-post-cured slabs and lenses varied to a greater extent, mainly due to the human element in molding.

Optical properties of the material and Toroidal lenses were within acceptable limits, as viewed perpendicular to the surface. However, prismatic image displacement encountered due to as-worn position was a problem that needed a lens design modification.

Physical property studies of irradiation-treated lenses and slabs indicated that a relatively low dosage of no greater than six (6) megarads be used to cross-link and adhere the lens coatings. Higher values caused excessive degradation of the base lens material.

CONTENTS

PAGE

I.	INTRODUCTION -----	9
II.	MATERIAL CANDIDATES -----	9
	A. Polyurethane Elastomers -----	9
	B. Ethylene Propylene Elastomers -----	11
III.	UNVULCANIZED RHEOLOGY -----	12
IV.	OPTICAL PROPERTIES -----	13
V.	PHYSICAL PROPERTIES -----	16
VI.	EFFECT OF IRRADIATION -----	17
VII.	PROCESSING PARAMETERS -----	18
VIII.	CONTAMINATION -----	23
IX.	CONCLUSIONS AND RECOMMENDATIONS -----	24
X.	APPENDIX A TABLES -----	29
	APPENDIX B MEMORANDUM -----	49
XI.	DISTRIBUTION -----	51

I. INTRODUCTION

Considerable work has been accomplished by Edgewood Arsenal and Dow Corning in developing a new protective mask using an optical grade silicone elastomer. This material has a wide range of temperature capabilities, optical clarity and flexibility.

A mask design fabricated with the above material gives much greater visibility than current protective masks. This program was concerned with the material analysis and establishing processing parameters and recommendations for the molding of this mask using GFM Toroidal Lens Mold.

II. MATERIAL CANDIDATES

A. Polyurethane Elastomers

The use of polyurethane elastomers for the full face mask was jointly determined to be not feasible due to limitations in high stiffness and hardness. It is possible to reduce both of the above, but only at the excessive sacrifice of critical physical properties. Therefore, all of the following work with polyurethane was limited to the fabrication and testing of lens "Outserts".

1) Injection molding trials were made with Upjohn Pellethane grades 2103-80A, 2103-90A and 2103-55D in an available polycarbonate Gentex visor mold.

2) Results of this first trial with polyurethane material is reported below for samples as molded and post-cured 13 hours at 240°F. The total light transmittance (TLT) and haze for these parts are generally improved by postcuring.

<u>Pellethane Grade</u>	<u>As Molded</u>	<u>Post-Cured</u>
<u>2103-80A</u>		
TLT, %	86.3	88.0
Haze, %	33.5	12.7
<u>2103-90A</u>		
TLT, %	90.0 (90.2) ¹	87.5 (88.0) Retest
<u>2103-55D</u>		
TLT, %	90.7	91.8
Haze, %	2.4	1.4

3) The 2103-80A material was submitted for hardness and stiffness evaluation only, due to poor TLT and severe haze.

4) The 2103-80A was determined to be the best for hardness and stiffness. Poor optical performance of this stock was attributed to high moisture content. The visor mold, scheduled for refurbishing, was returned and additional trials were made with 2103-80A. This trial was more successful and samples were delivered to Edgewood Arsenal. The improved TLT and haze properties of this run are shown below.

<u>2103-80A</u>	<u>As Molded</u>	<u>Post-cured (14 hrs @ 240°F)</u>
TLT, %	89.7	89.8
Haze, %	8.1	5.2

5) Four (4) Outsert lenses were cut from 2103-80A material (not post-cured) and given to Mr. C. Shoemaker during his visit to Gentex on September 10, 1975. These lenses were a little short on each side due to the size limitations of our visor.

6) We have been in contact with Upjohn and they are working with an experimental urethane grade with less haze and more light stability. They will send samples to us when available which they predict to be in 3 to 4 months.

7) The current 2103 grades are a polyether backbone with an aromatic isocyanate (MDI). Polyester urethanes with an aliphatic isocyanate give the best clarity and light stability, but sacrifice hydrolytic stability. This type of thermoplastic urethane is not available from Upjohn and is generally more difficult to process.

Fade-O-Meter tests were performed to check the Ultraviolet stability of urethane films and coatings. Upjohn urethane coated Toroidal lens, Wilmington, Chemical urethane coated Toroidal lens, Upjohn 2363-80A film and non-treated silicone control Toroidal lens were exposed for 220 hours in a Fade-O-Meter. Appendix Table I indicates the percent total light transmittance and percent haze from 0 to 220 hours. The Upjohn materials are definitely less stable to sunlight and Ultraviolet transmission. This is most likely due to the reasons stated in Item No. 1 above. Upjohn's urethane grades have a polyether backbone and incorporate an aromatic isocyanate where as polyesters with an aliphatic isocyanate are much more light stable.

A search was made for a source for a polyester urethane with an aliphatic isocyanate. K. J. Quinn, Malden, Massachusetts was the only source that would supply us with this material. However, after repeated trials and development effort, K. J. Quinn announced that they could not supply an 80 Shore A hardness version of this material due to their processing problems.

Urethane toxicity information was requested and is as follows:

- 1) Information on Upjohn's Pellethane 2363 which has had limited testing as implants with no adverse effects.
- 2) No such information is available for Pellethane 2103 series due to the very small amount (less than 1%) of heavy metals used as a stabilizer.
- 3) Pellethane 2363 and 2103 series are the same except for the lack of stabilizer. The effect of this was claimed to be negligible in respect to processing and ultimate physical properties. Trials with this material proved that this was so.

B. Ethylene - Propylene Elastomers

Two major sources of these base elastomers were contacted in an effort to obtain a good optical-transparent grade.

- 1) DuPont was contacted three times and were not successful in developing a satisfactory transparent ethylene-propylene terpolymer (EPDM). DuPont's interest in this program appeared to be lacking or very small. Believe that they are afraid of producing large quantities of this material that would be contaminate free.
- 2) Exxon Chemical Company was contacted and two (2) samples of compound and mixed (EPDM and EPR) were supplied to us from their best efforts to meet the optical requirements.

Mold trials with both compounds indicated severe haze and extremely poor hot and cold tear resistance.

For the above reasons and problems, it was a joint agreement between Edgewood Arsenal and Gentex Corporation to terminate this portion of the contract.

III. UNVULCANIZED RHEOLOGY

A rheology study of silicone lots 002 and 003 using a Brabender Plastic-Corder to determine minimum viscosity, scorch rate and cure rate. This, as well as other similar pieces of equipment such as Monosanto Rheometer and Moony Viscometer, should only be used as tools to indicate processability parameters and not relied upon to establish absolute cure times. Any particular processor can set-up limits for particular equipment in order to provide uniform processability and ultimately, cured products.

A. Processability Comparison of Lots 002 and 003

There was a definite difference in lots 002 and 003 supplied by Dow Corning in processing, scorch, minimum viscosity, cure rate and shelf life, as indicated below.

- 1) Processability - Lot 003 has much more tack and was more difficult to handle on the mill during mixing. Its tack or tendency to stick to the mill rolls, was greater than its green strength. Lot 003 was not impossible to process, but was more difficult. This condition also made it more prone to pick-up contaminates.
- 2) Scorch Rate (Measure of processing safety) - Lot 003 has from 3 to 4 minutes more processing safety as determined by our Brabender analysis. The scorch time was determined by the total time for the stock to rise three torque units above the minimum viscosity torque level. Standard test conditions used with Brabender were 50 gm charge and chamber temperature of 107°C (225°F).
- 3) Minimum Viscosity - Lot 003 had a lower viscosity of 2 to 3 torque units which generally helps in improved stock transfer.
- 4) Cure Rate - Theoretically the cure rates of lots 002 and 003 were pretty much the same once they started to cure. However, the Brabender data indicated that lot 003 was 3 to 4 minutes slower which was due mainly to the improved scorch safety. This should help stock transfer without appreciably altering cure time.

5) Uncured Stock Shelf Life - As measured by scorch safety (time for 3 torque unit rise) over a period of time, lot 003 had more scorch safety after four days at room temperature (72°F) than lot 002 had after one day. This was also substantiated in molding trials.

A. The above differences were discussed with Dow Corning personnel and are believed to be due to the following:

1) Lot 003 was the first production size run and the molecular weight was slightly lower than lot 002.

2) Lot 003 had a reduction in cross linker and inhibitor to improve tear resistance.

3) The combination of the above properties contributed to the differences in these two lots. It was too early to tell what the total effect would be on the ultimate product, but we would guess that it might result in slightly lower tensile strength, increased compression set, lower hardness and lower modulus.

C) We noticed a phenomena that the scorch safety improved during one and two days after mixing. Dow Corning could give no explanation for this. Many elastomers improve in uncured properties upon standing due to "wetting action". However, this is mostly due to the incorporation of fillers and this is not the case with this particular silicone, because the fillers have been incorporated prior to blending.

IV. OPTICAL PROPERTIES

The Toroidal lens optical properties were measured both in a relaxed state and using a fiberglass/resin holder made using the male mold insert as a form. The optical measurements were made based on MIL-L-38169.

Actual test areas of the Toroidal lenses are indicated in the attached figure and found in Appendix Table II.

Data are shown in Appendix Tables III through VI.

A. Optical measurements were taken using the following instruments:

1. Gardner Haze Meter - Total light transmittance and haze.
2. Telescope - Prismatic deviation, refractive power and definition.
3. Ann Arbor - Distortion.

B. Optical measurements were taken perpendicular to lens surface and not in the "as worn" position. A special holder is necessary for the later measurements. For the same reason, horizontal and vertical deviations could not be determined.

C. Total transmittance for all lots was over 90 percent as measured using source "C" on the haze meter. This appears to average between 2.5 - 3.0 percent higher than Dow Corning's values. Difference could be due to instrument used by Dow Corning, and/or conditions of their slab mold.

D. Percent haze varies from slightly over 3 percent to almost 5 percent with the highest being lot 32059. Lot 004 had the lowest haze.

E. Telescope and Ann Arbor properties were generally good in the relaxed position and some distortion was noted due to stretching when the fixture was used. These properties are probably affected more by molding techniques and/or tooling than polymeric variations.

F. Additional optical information on Lot 004 appears in the attached Appendix Table VII. I have also attached information about "Cylindrical Power" as determined by Omnitech, Inc., a subsidiary of Gentex Corporation in Appendix Table VIII. The 0.06 diopter reading (in a plano position) is not excessive. However, there is no question that problems will arise when the lens is in the "as worn" position.

G. After 340 hours in the Fade-O-Meter, there has been no change in total light transmission or increase in haze.

Total light transmittance and haze was measured before and after 600 hours in an Atlas Fade-O-Meter using a Gardner Haze Meter. The results are shown in Appendix Table I and summarized below.

1. No serious degradation to the surface or internal was noted after exposure for 600 hours.
2. The decrease in percent TLT and increase in percent haze was either due to surface dirt from the Fade-O-Meter or possibly surface haze.
3. The surface haze or dirt was easily removed with detergent and water.

H. All of the available silicone lots were evaluated using a Cary-14 Spectrophotometer over the range of 200 to 2000 non-o-meters. The following observations were made:

1. All lots have essentially the same characteristic traces over the wave lengths tested.
2. All have very poor Ultraviolet and near Ultraviolet attenuation. There is a sharp break in all curves at about 280nm. Listed below are the total light transmissions at the indicated wave lengths. From this the average erythemal UV transmittance is calculated per MIL-V-43511 (3.4.6) visor specification.

Spectral Transmittance at Indicated Wave Lengths

<u>Lot Number</u> (Wave Lengths, nm)	<u>-32059</u>	<u>001</u>	<u>002</u>	<u>003</u>	<u>005</u>
250	0	0	0	0	0
270	0	0	0	0	0
290	45	50	35	34	44
300	57	58.5	46	46	54
310	65	65	56	55	61
320	70	69	62	62	65
Average % Trans. -----	39.5	40.4	33.2	32.8	37.3

The maximum average listed in MIL-V-43511 is 1 percent.

1. In an effort to reduce haze and improve clarity, an optical brightener was incorporated into the silicone in concentrations of 0.02%, 0.1% and 0.7%, and the results are shown below.

<u>Sample No.</u>	<u>% Brightner</u>	<u>TLT, %</u>	<u>Haze, %</u>
1	0.0	90.6	3.12
2	0.02	86.1	4.17
3	0.1	82.3	4.61
4	0.7	77.3	5.90

V. PHYSICAL PROPERTIES

A comparison was made of stress-strain, tear and compression set properties of both ASTM slabs and Toroidal lenses directly from the mold and oven post-cured.

A. Stress-Strain and Tear Resistance

The comparison values for various lots of X4-2665 material are shown in Appendix Tables X and XI for material press cured 10'/270°F and with an oven post-cure of 4 hours/350°F. This information is summarized below:

1. Generally the physical values of ASTM slabs and Toroidal lenses agree within experimental error.
2. Post-cured results tend to be more uniform and the expected differences between non-post-cured part were as expected.
 - a. Increased hardness
 - b. Increased moduli
 - c. Reduced ultimate elongation
 - d. Reduced tear resistance
3. There appeared to be a trend of slightly lower tear resistance with lots 004 and 005, but they are high enough values to provide a satisfactory product.

B. Compression Set B

A comparison of compression set B, no post-cure vs. post-cure of various silicone lots and the effect of post-cure time and temperature using silicone lot number 005, are shown in the attached Appendix Tables XII and XIII.

- 1) Appendix Table XII indicates a slight improvement in compression set B with lot numbers 004 and 005. It also indicates more consistent set values with post-cured material.
2. Physical properties and compression set B are shown as a function of post-cure time and temperature in Appendix Table XIII. From this data, a wide range of post-cure times and temperatures are available. Physical properties and compression set B did not vary much. Tear die B showed some variation, but values were very respectable.
3. Extreme care must be exercised in testing and measurement of compression set B. Each ply in the plied-up samples must be individually gauged before and after testing 22 hours at 212°F. Talc must be dusted between plies to prevent blocking after compression set aging.

VI. EFFECT OF IRRADIATION

Appendix Tables XIV through XIX indicate the effects of irradiation concentration on physical properties and compression set B, for both coated and uncoated slabs. Included are tests for Shore A hardness, tensile strength, moduli, tear strength and ultimate elongation. These results are summarized below:

- A. Irradiation basically has the same effect as elevated heat aging, but of course, at much faster degradation rates.
- B. Shore A hardness, elongation and tear strength are the properties most effected.
- C. As the dosage is increased, then tensile also starts to decrease.
- D. There is essentially no difference in physical properties of uncoated vs. coated slabs.

E. Considerable trouble was experienced in the measurement of the coated compression set B pellets due to blocking. Some problems were also experienced with the higher dosage level in the uncoated slabs. The latter could be due to surface polymer degradation.

F. Properties of the slabs exposed in a curved position were very close whether tested in the middle or the sides. There appears to be a slightly greater effect upon the sides.

G. No control slabs were supplied with the sets from AYO. EA slab (Appendix Table XIV) was used as a control.

H. From this data, I would recommend exposing this product to no greater than 5 to 6 MR. Higher values will cause too much loss in elongation and tear accompanied with excessive increases in Shore A hardness.

VII. PROCESSING PARAMETERS

The following are processing parameters ultimized to produce the best optical quality Toroidal lenses at the lowest reject rate using GFM Toroidal lens mold. Modifications will have to be made depending upon size and type of mold, tooling and equipment.

A. Mixing Procedures

The following mixing procedure is recorded here as employed with our laboratory mill. This procedure differs from the Edgewood Arsenal method in that we do not use the mill guides to contain the stock. This was done to prevent stock contamination due to worn mill guides. This also may be a good method, but somewhat impractical, when larger mills are used at other facilities. In either case, each component should be milled separately before blending to eliminate a "crepe" problem associated with silicone.

1. Mill opening - 3mm and use full cold water.
2. Mill 500 grams of Part A - 6 times end-over-end and remove from mill in a strip.
3. Mill 500 grams of Part C - 10 times end-over-end and remove from mill in a strip.

4. Open mill to 4mm.
5. Place Parts A and B strip together and mill end-over-end 20 times.
6. Remove milled stock in roll and cut preparation to weight.

Stock must not touch mill guide to prevent contamination and milling area must be thoroughly cleaned and checked using a black light as an indication.

B. Pressure (Press) Variation Trials

The press pressure was varied between 2500 and 4000 psi while keeping the transfer pot temperature at 270°F and the mold temperature at 275°F. Temperatures were measured using a surface pyrometer on the external side of the closed mold and transfer pot. Cure time, in all cases, was ten (10) minutes.

The variations in press pressure appear to effect the severity and position of flow lines in the Toroidal lens at the curing temperatures listed on the previous page. The predominate effect is due to the rate of material transfer in the mold.

<u>Pressure, psi</u>	<u>Comments</u>
2500	Severe flow lines in the extreme sides of lens, irregular flow lines in center of lens.
3000	Flow lines in the extreme sides and left and right bottom. Not as severe as at 2500 psi.
3500	Slight flow lines in the extreme sides and on bottom of lens.
4000	Slight flow lines on right and left bottom only.

It is almost impossible to consistently eliminate the slight flow lines around the transfer gate and on the bottom side with the current design of mold. The latter are generally slight and limited to one on each side. Several solutions to this problem are listed below.

A. Place transfer gate in top portion of lens which is not a critical optical portion of the lens.

B. Place transfer gate outside molded lens area.

C. Increasing the transfer gate size could possibly help, but not necessarily so.

The above recommendations should not be accomplished at this time due to Edgewood Arsenal's Toroidal lens requirements for prototype construction of complete face masks.

C. Transfer Pot Loading Variations Trials

The material charge weight in the transfer pot was varied from 65 grams to 140 grams to see the effect it had on flow lines. Normal weight used was 130 grams for silicone lot No. 005. Press pressure of 4000 psi and curing temperatures indicated in section VIII B were used.

The flow lines in the bottom (left and right sides) were evident at all transfer pot loading levels, even the partially filled lenses had them. This suggests that the positions of the transfer gate and/or type would have to be modified to eliminate these slight flow lines in the critical optical areas.

D. Transfer Pot Strata Test Trials

The ultimate effect in a molded Toroidal lens was studied when the transfer slug was composed of different colored layers of silicone. These layered slugs were loaded in the center of the pot both in a horizontal and vertical position.

When the slug was placed in the transfer pot with the layers in the vertical position, a mixing action occurred and no individual color concentration was noted.

However, when the layered slug was placed in horizontal position, definite distinct uniform layers resulted in the molded lens. Also, these layers appeared in the lens in the reverse order or position to that of the transfer slug. That is, the top color in the slug appeared on the bottom or inside of the lens while the bottom slug color appeared in the top or outside lens surface.

Additional transfer pot-loading trials were made where the charge weight was varied from 60 to 150 grams and each charge was made up of three horizontal colors with green on top, yellow in the middle and blue on the bottom.

In all cases, the colors were reversed and appeared in uniform layers in the molded lens. The reason for this appears to be that the silicone is reacting like a very viscous liquid passing through an orifice.

This phenomena should be investigated further.

E. Molding Time and Temperature Trials

1. Reduced cure times at standard molding conditions of 270°F transfer pot, 275°F mold and 4000 psi pressure for ten (10) minutes.

The cure time was decreased in increments of two (2) minutes. A two-minute cure produced a lens with insufficient cure to demold. Time of six- and four- minutes appeared to increase the number of visual optical defects in the form of flow lines.

2. Increased temperature trials indicated that 285°F transfer pot and 290° F mold was as high as we could go before severe molding defects, "orange peel" appeared.

3. The results from both 1 and 2 above were not conclusive. In order to establish optimum cure temperatures and time, it is essential that a more accurate method be employed to determine actual temperatures in the mold and transfer pot. This will be accomplished as soon as approval is granted by Edgewood Arsenal to drill holes for thermocouples and/or thermometers in the mold base.

F. Cure Reduction

Holes were drilled within 1/8" of the transfer pot and mold cavities so that we could accurately determine the actual molding temperatures via a thermocouple and/or dial thermometers. Through this we were able to determine the optimum molding conditions and minimum cycles for an acceptable Toroidal lens from this mold and press.

<u>Conditions</u>	<u>Values</u>
Pressure	3500 - 4000
Transfer Pot Temp., °F	290°F
Mold Temp., °F	295 - 300
Molding Time, Min.	4 - 5
Change Time, Min.	3.5
Total Cure Cycle, Min.	7.5 - 8.5

1. Going to higher temperatures than indicated presents problems in precuring the elastomer and causing flow lines and "orange peel" effects.

2. A three minute cure could not be consistently molded over an extended period of time due to excessive mold heat loss.

3. When the product is undercured, the first indications are difficulty in part removal and hexagonal lines throughout the product. The latter were very hard to see with the naked eye, but were very noticeable as viewed under the shadowgraph.

Increasing the cure time helped, but an increase in mold temperature proved to be the best way cosmetically and economically.

G. Effect of Filler Levels in Silicone X4-2665

The easiest and only way available to evaluate the effect that filler concentrations have on optical, physical and processing properties would be to have Dow Corning supply us with the above polymer without any filler so that we could blend to any desired ratio.

Dow Corning confirmed our thoughts that without filler, this polymer would have very little strength and therefore, not a feasible idea. Dow further commented that they had determined the current filler level for overall optimum properties.

VIII. CONTAMINATION STUDIES

The intent of this study was to press the silicone material, after the various processes, between clear plates to determine by count the amount of contamination due to any given step. At best, this is subjective and the visual aids we tried were of little use, and in many cases, produced erroneous results and/or conclusions.

A. The first samples were made by pressing parts A, C, and mixed A & C separately between 1 mil polyester film. This produced a hazy product.

B. The second method was to press the same product between .100" thick clear acrylic sheets in same manner as described in "A" above. This was done both in thin sheets and .100" thick. This produced a better product, however, entrapped air proved to hinder the evaluation for contaminants.

C. The visual aids used to determine contaminants were:

1. Shadowgraph
2. Projector
3. Reflective Light
4. Ann Arbor
5. Microscope
6. Naked Eye

The Shadowgraph and Projector methods could not determine the difference between air inclusions and contaminants. This was proved by viewing indicated contaminants via Microscope. These turned out to be density differences and not contaminants.

The Ann Arbor will generally indicate inclusions, but due to its smallness, it is very difficult to scan a large area.

Out of necessity, we have reviewed the plates with the naked eye and have recorded the following results. This is strictly a subjective test and it is altogether possible that some of the specks indicated only appear to be specks or that they may have been on the acrylic sheet surface. We took extreme precautions to clean the plates and keep them clean prior to pressing.

Listed in Appendix Tables XX and XXI are the results of our contaminate counts in the pressed plates and in the resulted molded Toroidal lenses.

In the March 12, 1976 run, we pressed the majority of the stock and only molded four (4) Toroidal lenses. We only had one possible contaminate and that was a wide yellowish streak which appears to be surface oriented. This could have happened in demolding.

The March 19, 1976 trials were just reversed where the majority of the stock was used to mold Toroidal lenses. From these lenses we had four (4) out of twenty-five (25) (16%) that had one very minor speck in each lens.

In both cases above, we have shown the possibility of more specks in both the virgin material and processed material than indicated in the finished product. It is our subjective judgement that the Dow Corning material is basically a very clean product. We have noticed some contaminates, but generally in isolated instances. The majority of the contaminates come from milling and in the molding cycle. We definitely know that contaminates are present in the transfer pot and are very difficult to remove due to the extremely small distance between the pot and plunger. We have also found that the more you attempt to clean the entire mold, the higher the percent of contaminates there are in the finished product.

IX. CONCLUSIONS AND RECOMMENDATIONS

A. Conclusions

1. Through this study we were able to produce acceptable X4-2665 silicone lenses that were used as prototype lenses in Edgewood Arsenal's new Protective Face Mask Program.

2. Although we made substantial improvements in the reject rate, it is still excessive at between 25 percent and 30 percent under optimum conditions.
3. Processing parameters were established which resulted in a reduction in reject rate.
4. High reject rate was due to contamination, flow lines and improper handling; especially of the hot molded lens.
5. Base silicone elastomer generally was very clean and was not a contributing factor in contamination of molded lens.
6. Mold and transfer pot temperatures are critical in minimizing molded flow lines.
7. Majority of flow lines were in the critical area and were centered around the transfer sprue.
8. The Toroidal lens has satisfactory optical properties when measured perpendicular to the lens surface, but has a prismatic effect in the as-worn position.
9. If irradiation method is used to promote coating adhesion, care must be exercised to keep the dosage low to prevent degradation of the silicone lens.
10. Cure times were reduced from a standard ten (10) minutes to four (4) minutes. Since the total change time was 3.5 minutes, lower cure times over an extended period were not feasible, due to excessive mold cooldown.

B. Recommendations

1. Further reduction in cure time can be affected by reducing the mold heat loss through heating cores in the mold.
2. Flow line reduction can be accomplished by proper control of molding temperatures, but consideration of placement and size of transfer sprue should be made so that if any flow lines are present, that they be in a noncritical viewing area.

3. The following should be accomplished to minimize rejects due to contamination.

- a) Clean room daily, especially around mixing and molding area.**
- b) Reduce positive air flow to a minimum. Laminar air flow is recommended.**
- c) Use Clean Room type coats and caps instead of current white coats.**
- d) Use isopropyl alcohol for cleaning unvulcanized silicone processing equipment.**
- e) Use rubber gloves when mixing and handling silicone rubber.**
- f) Use lint-free cheese cloth in cleaning mold and transfer pot areas.**
- g) Use end-over-end method for mixing without touching mill guides. Thoroughly break down each component prior to blending.**
- h) Clean transfer plunger and pot thoroughly between each molding and mold, when necessary.**
- i) Eliminate unnecessary entry into room.**

After thorough cleaning and prior to mixing the area should be checked with a "black light". This reveals considerable lint and contaminates throughout the processing area not seen with the naked eye. Because of this, the following procedure should be instituted:

- a) All areas should be cleaned with a damp cheese cloth using the "black light" to insure thorough cleaning.**
- b) Floor should be damp-mopped.**

4. Since the silicone attracts foreign material statically, the area should be kept moist to keep this problem to a minimum.
5. Viewing portion of lens should be redesigned to eliminate the as-worn optical problems.
6. Strata programs should be established to determine the feasibility of transferring a uniform layer of a dissimilar material for better barrier properties.

APPENDIX A TABLES

Table A-1
FADE - 0 - METER EXPOSURE RESULTS

Exposure Time, Hrs.	0		100		220		(Lightly Washed)	
	TLT, %	Haze	TLT, %	Haze, %	TLT, %	Haze, %	TLT, %	Haze, %
1L (2)	87.3	5.21	84.6	11.48	84.3	12.45	82.0	28.4
1R	87.3	5.26	87.4	5.73	86.3	7.58	83.4	24.3
2L	88.2	5.81	88.8	5.79	88.9	6.00	91.5	3.82
2R	88.3	6.09	88.7	6.81	88.6	7.00	89.2	5.40
3 (1)	92.0	4.52	86.8	17.87	84.1	25.8	84.7	21.6
4L	91.2	3.50	91.0	5.86	90.3	7.22	89.2	4.98
4R	91.1	3.65	90.9	6.97	90.5	7.14	91.6	3.90

(1) Turned yellow after 30 hours.

(2) Coating started to craze on exposed surface only at 100 hours
Increase in haze after washing (220 hours) due probably to more light being deflected.

Sample Number	Sample Identification
1	Upjohn coated Toroidal Lens
2	Wilmington Chemical coated Toroidal Lens
3	Upjohn 2363-80A film
4	Control Toroidal Lens - uncoated

Table A-2

TOROIDAL LENS - OPTICAL TESTS

REF. FIG. 1 MIL-L-38169

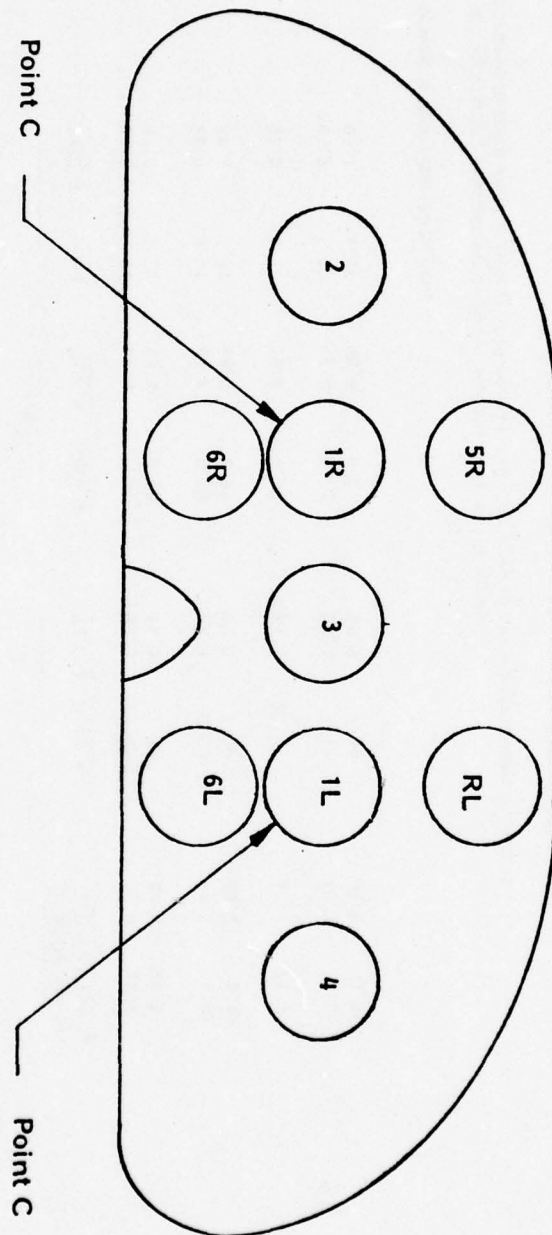


Table A-3

TOROIDAL LENS - OPTICAL EVALUATION

MIL-L-38169 Specification

Material: Dow Corning Silicone
Lot 32059

Test Position	Right			Center	Left			Tested			
	1R	2R	SR		6R	3	1L		4L	5L	6L
Prismatic Deviation	.02	.07	.10	.03	.08	.08	.05	.07	.07	.07	Relaxed Fixture
Refractive Power	-.065	+.06	+.03	-.01	+.04	+.03	-.005	+.02	-.06	-.005	Relaxed Fixture
Spherical & CLN Power											
Not Required in Above Spec., But Will Be Tested in Future.											
Defination (Lines Resolved)	48	80	56	40	80	28	80	56	40	68	Relaxed Fixture
Ann Arbor	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	Relaxed Fixture
Total Light Trans, %	91.8					91.6					Relaxed
Haze, %	4.54					4.80					Relaxed

Table A-4

TOROIDAL LENS - OPTICAL EVALUATION
MIL-L-38169 Specification

Material: Dow Corning Silicone
Lot 001

Test Position	Right						Center 3	Left						Tested
	1R	2R	5R	6R	3	1L		4L	5L	6L				
Prismatic Deviation	.03	.04	.04	.05	.02	.02	.07	.04	.07	.02	.02	.02	.02	Relaxed Fixture
Refractive Power	-.01	+.03	+.02	+.015	-.01	+.04	+.045	-.02	+.06	+.06	+.01	+.05	+.05	Relaxed Fixture
Spherical & CLN. Power	Not Required in Above Spec., But Will Be Tested in Future													
Defination (Lines Resolved)	80	80	80	80	80	80	80	80	80	80	80	80	80	Relaxed Fixture
Ann Arbor	OK	OK	OK	OK	OK	OK	Rej.	OK	OK	OK	OK	OK	OK	Relaxed Fixture
Total Light Trans, %	91.2												91.1	
Haze, %	3.65												3.59	
													Relaxed	

Table A-5

TOROIDAL LENS - OPTICAL EVALUATION

MIL-L-38169 Specification

Material: Dow Corning Silicone
Lot 002

Test Position	Right						Center	Left						Tested
	1R	2R	5R	6R	3	1L		4L	5L	6L				
Prismatic Deviation	.07	.06	.08	.03	.04	.05	.06	.07	.07	.03	.06	.07	.07	Relaxed Fixture
Refractive Power	+.04	-.03	-.05	+.015	-.035	+.005	+.015	-.01	+.055	-.055	+.04	-.02	+.06	Relaxed Fixture
Spherical & CLN. Power														
Not Required In Above Spec., But Will Be Tested In Future.														
Definition (Lines Resolved)	80	80	80	80	80	80	80	80	80	80	80	80	80	Relaxed Fixture
Ann Arbor	OK	OK	OK	OK	OK	OK	OK	OK	OK	Ref.	OK	Ref.	OK	Relaxed Fixture
Total Light Trans, %	91.0					90.9								Relaxed
Haze, %	3.94					3.99								Relaxed

Table A-6
TOROIDAL LENS - OPTICAL EVALUATION
MIL-L-38169 Specification Material: Dow Corning Silicone
 Lot 003

<u>Test Position</u> <u>Test</u>	<u>Right</u>						<u>Center</u>						<u>Left</u>						<u>Tested</u>
	<u>1R</u>	<u>2R</u>	<u>5R</u>	<u>6R</u>	<u>3</u>	<u>1L</u>	<u>4L</u>	<u>5L</u>	<u>6L</u>										
Prismatic Deviation	.04	.06	.04	.03	.04	.06	.05	.04	.03	.03	.03	.05	.04	.03	.03	Relaxed Fixture			
Refractive Power	+.01	+.005	+.01	.00	+.01	.00	+.005	+.015	+.01	+.045	+.06	+.035	-.005	+.045	+.01	Relaxed Fixture			
Spherical & CLN. Power	Not Required In Above Spec., But Will Be Tested In Future																		
Defination (Lines Resolved)	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	Relaxed Fixture			
Ann Arbor	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	Rej.	Rej.	OK	OK	Relaxed Fixture			
Total Light Trans, %	90.7					90.6										Relaxed			
Haze, %	4.28					4.32										Relaxed			

Table A-7

TOROIDAL LENS - OPTICAL EVALUATION
MIL-L-38169 Specification

Material: Dow Corning Silicone
Lot 004

Test Position	Right						Center	Left			Tested
	1R	2R	5R	6R	3	1L		4L	5L	6L	
Prism	.09	.08	.08	.09	.09	.09	.09	.11	.12	.08	Relaxed
	.10	.11	.12	.03	.08	.12	.10	.10	.12	.13	Fixture
Refractive or Spherical Power	+.04	+.01	+.02	+.015	+.01	+.035	-.025	-.005	+.02	-.06	Relaxed
	-.035	+.05	-.045	-.025	-.065	-.05	+.045	-.05	-.06	-.06	Fixture
Defination (Lines Resolved)	80	80	80	80	80	80	80	80	80	80	Relaxed
	80	80	80	80	80	80	80	80	80	80	Fixture
Ann Arbor	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	Relaxed
	OK	OK	Rej.	Rej.	Rej.	OK	Rej.	OK	OK	Rej.	Fixture
Total Light Trans, %	91.0					91.0					Relaxed
Haze, %	3.27					3.17					Relaxed
Prism (Expressed in vertical and horizontal deviation)											
Horizontal	+.04	+.04	-.06	+.02	+.03	+.05	+.06	-.06	-.06		Relaxed
Vertical	+.07	+.06	-.12	+.04	-.10	-.09	+.08	-.08	+.12		Relaxed
Horizontal	+.03	+.02	-.02	-.04	+.02	+.08	-.09	+.05	-.05		Fixture
Vertical	+.07	-.10	-.12	+.02	-.11	-.09	+.04	-.11	+.05		Fixture

Table A-8

Toroidal Lens Comparison
Total Light Trans. & Haze - Before & After Fade-o-meter Aging

<u>Lot No.</u>	<u>X32059</u>	<u>001</u>	<u>002</u>	<u>003</u>	<u>004</u>	<u>005</u>
<u>Original</u>						
<u>TLT, %</u>	91.7	91.1	91.0	90.6	91.0	90.7
<u>Haze, %</u>	4.67	3.62	3.96	4.30	3.22	3.53
<u>After 600 hrs. in Fade-o-meter</u>						
<u>As Is</u>						
<u>TLT, %</u>	89.6	87.5	89.0	88.9	89.7	---
<u>Haze, %</u>	13.58	20.95	13.85	15.08	11.97	---
<u>Lightly Washed</u>						
<u>TLT, %</u>	92.4	91.2	91.1	91.1	91.6	---
<u>Haze, %</u>	4.69	4.79	4.59	4.61	3.04	---

Table A-9

ASTM Slabs - Physical Property Comparison
No Post Cure vs Post Cure

Lot No.	X32059	001	002	003	004	005
<u>No Post Cure</u>						
Shore A Hardness						
100% Mod., psi	50	53	53	58	58	---
200% Mod., psi	195	240	200	265	250	---
300% Mod., psi	395	490	405	530	530	---
Tensile, psi	630	785	620	785	805	---
Elongation, %	1045	1135	1060	1170	1180	---
	470NB	440	485NB	480NB	450NB	---
Tear, Die "C"	182	124	252	243	140	---
<u>Post Cure</u>						
Shore A Hardness						
100% Mod., psi	61	56	61	62	64	---
200% Mod., psi	305	275	250	360	385	---
300% Mod., psi	645	620	555	745	740	---
Tensile, psi	1034	970	870	1065	1045	---
Elongation, %	1315	1185	1305	1280	1210	---
	395	370	470	380	360	---
Tear Die "C"	126	125	158	131	115	---

Press Cure : 10'/270°F
 Oven Post Cure: 4 hrs./350°F

Table A-10

Toroidal Lens - Physical Property Comparison
No Post Cure vs Post Cure

Lot No.	X32059	001	002	003	004	005
<u>No Post Cure</u>						
Shore A Hardness						
100% Mod., psi	53	47	56	55	55	52
200% Mod., psi	160	145	200	250	240	200
300% Mod., psi	420	330	425	515	530	415
Tensile, psi	705	540	690	765	825	655
Elongation, %	1315	1050	1200	1225	1200	1155
	500NB	490NB	480NB	480NB	450NB	490NB
Tear Die "C"	153	240	245	224	156	174
<u>Post Cure</u>						
Shore A Hardness						
100% Mod., psi	62	57	60	63	62	62
200% Mod., psi	275	280	290	375	325	305
300% Mod., psi	725	540	645	730	740	665
Tensile, psi	1085	885	955	1125	1095	945
Elongation, %	1085	1200	1265	1315	1240	1200
	370	410	395	365	345	385
Tear Die "C"	124	117	123	132	111	118

Press Cure : 10'/270°F
 Oven Post Cure: 4 hrs./350°F

Table A-11

TOROIDAL LENS COMPRESSION SET EVALUATION
(No Post Cure vs. Post Cure - 22 Hrs. @ 2129F)

<u>Lot Number</u>	<u>No Post Cure*</u>	<u>Post Cured**</u>
X32059	21.33	12.35
001	36.25	15.19
002	34.7	17.28
003	35.7	17.15
004	18.1	11.36
005	31.13	13.49

*Lens Cured 10 minutes @ 2709F
**Post Cure 5 hours @ 3509F

Table A-12

Post Cured Silicone Toroidal Lenses

Effect on Physical Properties

<u>Set No.</u>	<u>Post Cured Hrs/°F</u>	<u>Shore A Hardness</u>	<u>100%</u>	<u>200%</u>	<u>300%</u>	<u>Tensile & Elongation</u>	<u>Tear Die B</u>	<u>Compression Set B 22 Hrs./212°F.</u>
1.	N.P.C.	54	320	425	725		208.9	25.8
2.	14/250°	60	405	760	1040		182.3	14.0
3.	2.5/325°	60	410	780	1130		211.9	16.8
4.	5/325°	60	425	805	1135		155.6	13.5
5.	1/350°	60	430	800	1080		161.6	16.5
6.	2.5/350°	60	410	785	1100		206.4	11.9
7.	3.5/350°	60	390	860			187.0	12.4
8.	5/350°	60	405	770	1138		145.3	11.2
9.	1/375°	59	385	765	1110		172.2	10.4
10.	2.5/375°	59	575	790	1080		170.5	12.9
11.	1/400°	60	400	790	1075		170.3	12.0
12.	2.5/400°	61	390	830	1140		213.9	14.4

No Break On All Samples
320% Elongation

Gentex Dies
Lot No. 005
Press Cured - 5'/295°F

Table A-13

EFFECTS OF IRRADIATION ON SILICONE SLABS

INITIAL SLABS FROM EA

<u>Physical Properties</u>	<u>EA-Control</u>	<u>(17-20 Mega-Rads EA-Irrad</u>	<u>AYO Irrad - 3/26/76</u>	
			<u>3</u>	<u>4</u>
Identification				
Shore "A" Hardness	62	78	78	77
100% Modulus, psi	325	-	-	-
200% Modulus, psi	710	-	-	-
300% Modulus, psi	1075	-	-	-
Tensile Strength, psi	1200	1165	1080	980
Elongation, %	330	95	85	90
<u>Compression Set B</u>				
22 hours @ 212°F, %	20.3	13.9	8.7	10.7
<u>Blocking</u>				
After Compression Set 22 hours @ 212°F	Slight	Moderate	Severe	Severe
<u>Blocking, ASTM</u>				
D854-48 After 24 hours @ 160°F 2 kg. wt. on 4"x1" Samples	None	None		

Table A-14
Uncoated Silicone Slabs

Irradiation Effect On Physical Properties

<u>Set No.</u>	<u>MR</u>	<u>Shore A Hardness</u>	<u>Modulii, Psi</u>	<u>Tensile St. Psi</u>	<u>Elong. %</u>	<u>Tear Die B</u>	<u>Psi Die C</u>	<u>Compression Set B 22 Hrs/2120F.</u>
Control*	0	62	325	1200	300	-	-	20.3
1.	2.2	65	375	1295	320	140	107	11.5
2.	4.4	66	465	1250	265	125	102	10.7
3.	6.6	68	465	1190	210	81	90	11.6
4.	8.8	70	645	1230	190	62	77	11.6
5.	11.0	71	675	1260	170	58	77	14.7
6.	13.2	73	865	1170	140	52	63	13.5
7.	15.4	73	915	940	110	49	56	13.7
8.	17.6	74	885	915	100	56	41	13.9
9.	19.8	75		880	80	35	45	12.0
10.	22.0	75		750	60	40	47	17.0
11.	24.2	75		665	60	30	46	12.7
12.	26.4	75		625	50	29	42	11.5
13.	28.6	78		505	30	33	15	12.3
14.	30.8	78		485	30	17	30	14.0

*No Control For This Group - These From Original Slabs Sent by EA For First Irradiation Tests. (See Table A-13)

Table A-15
Coated Silicone Slabs

<u>Set No.</u>	<u>MR</u>	<u>Shore A Hardness</u>	<u>Irradiation Effect On Physical Properties</u>		<u>Tensile St. Psi.</u>	<u>Elong., %</u>	<u>Tear, Die B, %</u>	<u>Compression Set B 22 Hrs/212°F.</u>
			<u>Modulij, Psi 100%</u>	<u>200%</u>				
1.	2.2	65	395	835	1265	300	128	-
2.	4.4	67	475	1030	1235	245	103	7.2
3.	6.6	68	550	1225	1235	215	90	-
4.	8.8	70	695		1285	200	72	9.4
5.	11.0	72	775		1250	165	51	-
6.	13.2	73	825		1080	125	62	-
7.	15.4	73	900		965	100	47	-
8.	17.6	75			785	85	40	5.2
9.	19.8	77			685	60	44	-
10.	22.0	75			645	60	34	4.1
11.	24.2	78			465	50	34	-
12.	26.4	89			450	30	42	-
13.	28.6	80			350	30	27	-
14.	30.8	80			405	30	24	11.5

Table A-16

Uncoated Silicone Slabs Curved

(Side)

Irradiation Effect On Physical Properties

<u>Set No.</u>	<u>MR</u>	<u>Shore A Hardness</u>	<u>100%</u>		<u>200%</u>		<u>Tensile St., Psi</u>	<u>Elong., %</u>	<u>Tear Die B</u>
			<u>100%</u>	<u>200%</u>	<u>100%</u>	<u>200%</u>			
1.	2.2	65	455	955	1520	330	150.2		
2.	4.4	68	670	1235	1460	255	172.0		
3.	6.6	69	670	1300	1505	230	140.9		
4.	8.8	72	780	1470	1450	190	72.1		
5.	11.0	73	1050		1505	150	87.7		
6.	13.2	76	920		1335	150	65.7		
7.	15.4	77	1100		1270	115	76.2		
8.	17.6	78	1230		1230	100	55.7		
9.	19.8	79	1300		1230	100	88.1		
10.	22.0	80			970	75	59.8		
11.	24.2	81			785	70	49.4		
12.	26.4	81			755	65	47.2		
13.	28.6	81			930	80	42.0		
14.	30.8	82			670	65	33.8		

Table A-17

Uncoated Silicone Slabs Curved

(Middle)

Irradiation Effect On Physical Properties

Set No.	MR	Shore A Hardness	Tensile St.,			Elong., %	Tear Die B
			100%	200%	Psi		
1.	2.2	65	460	875	1355	320	175.3
2.	4.4	67	585	1130	1380	245	145.1
3.	6.6	69	580	1200	1405	235	138.8
4.	8.8	72	680		1440	185	104.2
5.	11.0	73	825		1435	175	82.8
6.	13.2	75	935		1320	140	65.7
7.	15.4	77	1020		1180	110	76.1
8.	17.6	78	1130		1130	100	47.3
9.	19.8	78			1085	90	64.6
10.	22.0	79	1170		1170	100	54.4
11.	24.2	81			835	77.5	46.8
12.	26.4	81			710	70	47.0
13.	28.6	81			550	65	31.2
14.	30.8	82			640	70	52.6

Table A-18

Viton A Additive Silicone Slabs

Irradiation Effect On Physical Properties

<u>Set No.</u>	<u>MR</u>	<u>Shore A Hardness</u>	<u>Irradiation Effect On Physical Properties</u>			<u>Tensile St., psi</u>	<u>Elong., %</u>	<u>Tear Die B</u>
			<u>100%</u>	<u>200%</u>	<u>300%</u>			
15.	2.2	64	465	940		1330	275	184.7
16.	6.6	70	710	1125		1125	200	134.4
17.	11.0	72	-			450	75	43.0
18.	15.4	76	1030			1185	110	47.3
19.	19.8	78	1150			1235	105	53.1
20.	24.2	79	-			1150	90	31.9
21.	28.6	82	-			975	85	52.6

Viton A Additive Silicone Slabs

Irradiation Effect On Physical Properties

15.	2.2	64	555	1020	1415	1400	285	130.4
16.	6.6	70	720	148		1438	200	102.1
17.	11.0	73	940			1390	155	64.5
18.	15.4	75	960			1415	145	63.1
19.	19.8	78	1310			1365	105	58.5
20.	(No B)	-				-		
21.	28.6	81	-			1070	75	31.9

Table A-19

MATERIAL CONTAMINATION STUDY

<u>Identification</u>	<u>Number of Specks</u>
A. <u>Pressed Between 1 Mil Polyester Film</u>	
1. 10-11-004 A	0
2. 10-11-004 C	0
3. 10-11-004 A & C (1st. Batch)	1
4. 10-11-004 A & C (2nd. Batch)	1
B. <u>Pressed Between .100" Acrylic Clear Sheets - 3/12/76</u>	
5. 005 A	1
6. 005 A	1
7. 005 C	0
8. 005 C	4
9. 005 C (No Wash)	1
10. 005 A & C	0
11. 005 A & C (170 Grams)	0
12. 005 A & C	0
13. 005 A & C	0
C. <u>Pressed Between .100" Acrylic Clear Sheets - 3/19/76</u>	
14. 005 A	5
15. 005 C	1
16. 005 A & C	1
17. 005 A & C	3

NOTES: Thin Sheets - 60 grams stock used
.100" Thick Samples - 100 grams stock used

Table A-20

Toroidal Lens Contamination Study

<u>Identification</u>	<u>Remarks</u>
3-12-005-1	Good
3-12-005-2	Scuff Marks & Flow
3-12-005-3	Good
3-12-004-4	<u>Yellow Line</u>
3-19-002-1	Good
3-19-002-2	Flow Line
3-19-002-3	Good
3-19-002-4	<u>Brown Speck</u>
3-19-005A-5	Good
3-19-005A-6	Flow Lines
3-19-005A-7	Good
3-19-005A-8	Scuff Mark
3-19-005A-9	Good
3-19-005A-10	Scuff Mark, Flow Line
3-19-005B-11	<u>Black Speck</u>
3-19-005B-12	Scuff Mark, Flow Lines
3-19-005B-13	Good
3-19-005B-14	Good
3-19-005B-15	Scuff Mark, Flow Lines
3-19-005B-16	Scuff Mark, <u>Brown Speck</u>
3-19-002-17	Flow Line
3-19-002-18	Good
3-19-005C-19	Short Flow Line
3-19-005C-20	Good
3-19-005C-21	<u>Black Speck</u>
3-19-005C-22	Scratch & Scuff Marks
3-19-005C-23	Good
3-19-005C-24	Good
3-19-005C-25	Good



Omnitech Division

Memorandum

to: John Daugherty
from: Albert J. Laliberte
subject: "Edgewood Arsenal Lenses"

refer to:
date: March 8, 1976

In your memo of Jan. 7th, you asked for "Cylinder Power" readouts on 3 toroidal Edgewood Arsenal Lenses. These were one control lens from Edgewood (EA-2), and two lenses molded by you identified as 12-17-003A-3 and 12-19-002B-13 (reject).

First of all, I measured these in a Lensometer. This instrument shows negative power at a magnitude of about $- .12$ diopter, with an image fuzziness indicating a degree of "Cylinder", which, however, could not be resolved accurately; or significantly measured on the Lensometer.

Since the lens is essentially plano, I measured the power on our telescope. All lenses measured the same.

In the major meridian, the power (refractive) is $- .12$, ($\pm .02$) d. In the minor meridian, the refractive power measures $- .06 \pm (.02)$ d. This indicates a cylindrical power (or astigmatism, or distortion, or aberration, or whatever you want to call it), of $.06$ diopter. Since a clean cut identifiable axial relationship was not observed, it is the writer's opinion that the effect noted, although measured, and/or expressed as "Cylindrical Power", is in reality an optical aberrative effect, equivalent in magnitude, to not more than $.06$ diopter.

"Edgewood Arsenal Lenses"

- 2 -

March 8, 1976

May I point out, John, that the minus readings observed are inherent in the design of this lens and are to be expected.

The .06 "Cylindrical Power" encountered, in my opinion, is at the acceptable limit for such products as safety lenses and shields; in fact, I consider this very good for this product.

None of the above relates to the most bothersome aspect which will be encountered wearing this lens, which is prismatic image displacement due to positioning of the lens as worn. This is a completely different effect than the measurements described above.

We are returning your lenses.

Sincerely,

OMNITECH, INC.
(Subsidiary of GenTex Corp.)



A.J. Laliberte

AJL:ca

Enclosures:
Copy your memo Jan. 7th

Lenses

DISTRIBUTION

Administrator
Defense Documentation Center
Attn: Accession Division ----- 12 Copies
CAMERON Station
Alexandria, Virginia 22314

Director
Chemical Systems Laboratory

Attn: DRDAR-CLJ-I ----- 5 Copies

Attn: DRSAR-MAS-C ----- 1 Copy

Attn: DRDAR-CLW-P/Mr. J. Mok ----- 2 Copies

Attn: DRDAR-CLD ----- 1 Copy

Attn: DRDAR-CLW ----- 1 Copy

Aberdeen Proving Ground, Maryland 21010