

AD-A056 578

SANDIA LABS ALBUQUERQUE N MEX
EXPLOSIVELY ACTUATED FAST-OPENING SWITCHES FOR VERY LARGE CURRE--ETC(U)
FEB 78 R I BUTLER, B W DUGGIN
SAND-77-1438

F/G 9/5


AT(29-1)-789

UNCLASSIFIED

AFWL-TR-78-501

NL

| OF |
AD
A056578

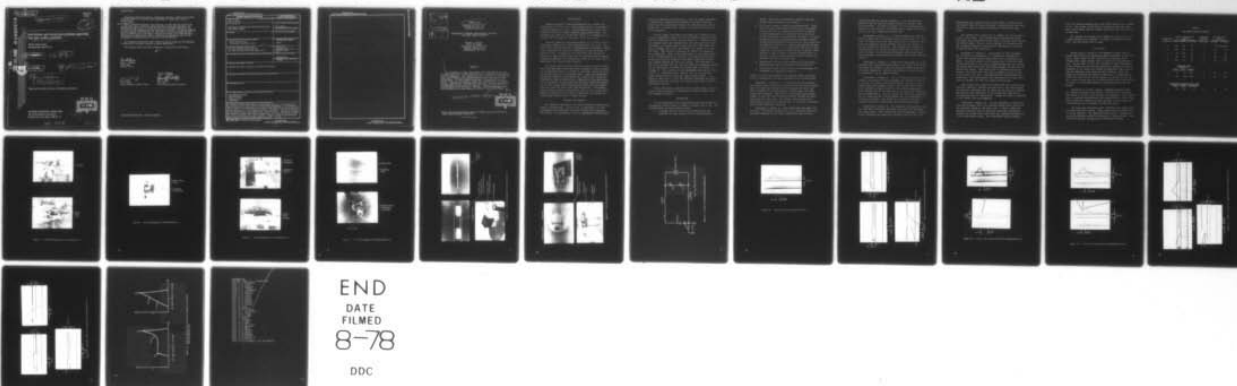

END
DATE
FILMED
8-78

DDC

18 AFWL-TR-78-501

AFWL-TR-78-501

14 SAND-77-1438

2

AD A 056578

6

EXPLOSIVELY ACTUATED FAST-OPENING SWITCHES
FOR VERY LARGE CURRENTS.

Sandia Laboratories
Albuquerque, NM 87115

11 February 1978

12 29p.

9

Final Report.

15 AT (29-1)-789

10 Robert I./Butler
Billy W./Duggin

Approved for public release; distribution unlimited.



AIR FORCE WEAPONS LABORATORY
Air Force Systems Command
Kirtland Air Force Base, NM 87117

DDC
RECEIVED
JUL 20 1978
B

315 344

Line

Prepared by Sandia Laboratories, Albuquerque, New Mexico, 87115 and Livermore, California 94550 for the United States Department of Energy under Contract AT(29-1)-789.

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This document has previously been cleared for public release by the Department of Energy and is available from NTIS as Report SAND77-1438.

This technical report has been reviewed and is approved for publication.

NH

David L. Johnson

DAVID L. JOHNSON
Capt, USAF
Project Officer

James H. Havey Jr.

J. H. HAVEY
Lt Col, USAF
Chief, Advanced Concepts Branch

FOR THE COMMANDER

Paul J. Daily

PAUL J. DAILY
Col, USAF
Chief, Applied Physics Division

DO NOT RETURN THIS COPY. RETAIN OR DESTROY.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFWL-TR-78-501	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) EXPLOSIVELY ACTUATED FAST-OPENING SWITCHES FOR VERY LARGE CURRENTS		5. TYPE OF REPORT & PERIOD COVERED Final Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Sandia Laboratories Albuquerque, New Mexico 87115		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61101F
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Weapons Laboratory (DY) Kirtland Air Force Base, New Mexico 87117		12. REPORT DATE February 1978
		13. NUMBER OF PAGES 29
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Fast-opening-switches High explosives Plasma cavities Foam-metals		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) In a series of eight experiments we investigated the use of high explosives to interrupt electric current by fast-opening switch mechanisms. The conducting link in seven of the experiments was a glass-lined plasma-filled cavity that was closed explosively. In the eighth experiment a foam-metal link was driven into the liquid-vapor phase and expanded into a ceramic cavity. Resistance increases and resultant voltage spikes that corresponded in time with the particle velocities of the collapsing walls were obtained. However, unknown high-resistance paths prevented voltage gradients greater than $10^5 - 10^6$ V/m.		

DD FORM 1473
1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

3

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

1. REPORT NUMBER	2. SECURITY CLASSIFICATION
3. DATE	4. REPORT TYPE
5. AUTHOR	6. PERFORMING ORGANIZATION NAME
7. PERFORMING ORGANIZATION ADDRESS	8. PERFORMING ORGANIZATION CITY
9. PERFORMING ORGANIZATION STATE	10. PERFORMING ORGANIZATION COUNTRY
11. PERFORMING ORGANIZATION POSTAL CODE	12. PERFORMING ORGANIZATION TELEPHONE
13. PERFORMING ORGANIZATION TELETYPE	14. PERFORMING ORGANIZATION FAX
15. PERFORMING ORGANIZATION E-MAIL	16. PERFORMING ORGANIZATION WWW
17. PERFORMING ORGANIZATION URL	18. PERFORMING ORGANIZATION URL
19. PERFORMING ORGANIZATION URL	20. PERFORMING ORGANIZATION URL
21. PERFORMING ORGANIZATION URL	22. PERFORMING ORGANIZATION URL
23. PERFORMING ORGANIZATION URL	24. PERFORMING ORGANIZATION URL
25. PERFORMING ORGANIZATION URL	26. PERFORMING ORGANIZATION URL
27. PERFORMING ORGANIZATION URL	28. PERFORMING ORGANIZATION URL
29. PERFORMING ORGANIZATION URL	30. PERFORMING ORGANIZATION URL
31. PERFORMING ORGANIZATION URL	32. PERFORMING ORGANIZATION URL
33. PERFORMING ORGANIZATION URL	34. PERFORMING ORGANIZATION URL
35. PERFORMING ORGANIZATION URL	36. PERFORMING ORGANIZATION URL
37. PERFORMING ORGANIZATION URL	38. PERFORMING ORGANIZATION URL
39. PERFORMING ORGANIZATION URL	40. PERFORMING ORGANIZATION URL
41. PERFORMING ORGANIZATION URL	42. PERFORMING ORGANIZATION URL
43. PERFORMING ORGANIZATION URL	44. PERFORMING ORGANIZATION URL
45. PERFORMING ORGANIZATION URL	46. PERFORMING ORGANIZATION URL
47. PERFORMING ORGANIZATION URL	48. PERFORMING ORGANIZATION URL
49. PERFORMING ORGANIZATION URL	50. PERFORMING ORGANIZATION URL
51. PERFORMING ORGANIZATION URL	52. PERFORMING ORGANIZATION URL
53. PERFORMING ORGANIZATION URL	54. PERFORMING ORGANIZATION URL
55. PERFORMING ORGANIZATION URL	56. PERFORMING ORGANIZATION URL
57. PERFORMING ORGANIZATION URL	58. PERFORMING ORGANIZATION URL
59. PERFORMING ORGANIZATION URL	60. PERFORMING ORGANIZATION URL
61. PERFORMING ORGANIZATION URL	62. PERFORMING ORGANIZATION URL
63. PERFORMING ORGANIZATION URL	64. PERFORMING ORGANIZATION URL
65. PERFORMING ORGANIZATION URL	66. PERFORMING ORGANIZATION URL
67. PERFORMING ORGANIZATION URL	68. PERFORMING ORGANIZATION URL
69. PERFORMING ORGANIZATION URL	70. PERFORMING ORGANIZATION URL
71. PERFORMING ORGANIZATION URL	72. PERFORMING ORGANIZATION URL
73. PERFORMING ORGANIZATION URL	74. PERFORMING ORGANIZATION URL
75. PERFORMING ORGANIZATION URL	76. PERFORMING ORGANIZATION URL
77. PERFORMING ORGANIZATION URL	78. PERFORMING ORGANIZATION URL
79. PERFORMING ORGANIZATION URL	80. PERFORMING ORGANIZATION URL
81. PERFORMING ORGANIZATION URL	82. PERFORMING ORGANIZATION URL
83. PERFORMING ORGANIZATION URL	84. PERFORMING ORGANIZATION URL
85. PERFORMING ORGANIZATION URL	86. PERFORMING ORGANIZATION URL
87. PERFORMING ORGANIZATION URL	88. PERFORMING ORGANIZATION URL
89. PERFORMING ORGANIZATION URL	90. PERFORMING ORGANIZATION URL
91. PERFORMING ORGANIZATION URL	92. PERFORMING ORGANIZATION URL
93. PERFORMING ORGANIZATION URL	94. PERFORMING ORGANIZATION URL
95. PERFORMING ORGANIZATION URL	96. PERFORMING ORGANIZATION URL
97. PERFORMING ORGANIZATION URL	98. PERFORMING ORGANIZATION URL
99. PERFORMING ORGANIZATION URL	100. PERFORMING ORGANIZATION URL

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

ACCESSION for	
NTIS	White Section ☒
DDC	Ref Section ☐
UNANNOUNCED	☐
JUSTIFICATION.....	
BY.....	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

SAND77-1438

Printed October 1977
Unlimited Release

EXPLOSIVELY ACTUATED FAST-OPENING SWITCHES
FOR VERY LARGE CURRENTS*

Robert I. Butler
Billy W. Duggin
Simulation Division 5233
Sandia Laboratories
Albuquerque, NM 87115

ABSTRACT

In a series of eight experiments we investigated the use of high explosives to interrupt electric current by fast-opening switch mechanisms. The conducting link in seven of the experiments was a glass-lined plasma-filled cavity that was closed explosively. In the eighth experiment a foam-metal link was driven into the liquid-vapor phase and expanded into a ceramic cavity. Resistance increases and resultant voltage spikes that corresponded in time with the particle velocities of the collapsing walls were obtained. However, unknown high-resistance paths prevented voltage gradients greater than (10^5-10^6) V/m.

100,000 to 10 to the 6th power



*This work was sponsored in part by AFWL using Lab Director's funds under project ILIR-7607.

Introduction

Ongoing programs at ERDA laboratories will require the interruption of large (i.e., tens of MA) currents in periods of a few microseconds or less. This mechanization, known as an "opening switch" or "fuze," produces high voltage drops. For instance, an inductive voltage drop of 10^7 V is required to interrupt 10^8 A through an inductance of 0.1 μ H in 1 μ s.

The most commonly used opening switch is a fusible link of exploding bridgewires or foil in parallel with the load. However, these opening switches or fuzes absorb considerable energy from the system and have been limited to voltage gradients of about 10^6 V/m. In addition, the relatively high resistance lasting for many microseconds prior to opening severely hampers compressed magnetic field generators, which is the usual way of generating very large pulsed currents.

The ideal opening switch would be a link of very low inductance and negligible resistance whose impedance could be raised to an unlimited value in a period of less than 1 μ s by an external energy source at a prescribed time. Large area plane-wave detonation fronts in high explosives, produced by a technique developed at Sandia Laboratories, appeared to have application to this problem. We concluded that the most promising approach was to use a glass-lined plasma-filled cavity for the fusible link and close the cavity with high explosives. A secondary approach was to drive a foamed-metal link into the liquid vapor phase, as predicted by the Chart D hydrocode, and expand the liquid-vapor mixture into a ceramic cavity.

Procedure and Results

We conducted experiments with seven different plasma-filled cavity configurations. The cavities in Experiments 1-5 were rectangular parallelepipeds which were closed with plane-wave detonations. In Experiments 6 and 7, cylindrical cavities were

closed by imploding the glass walls. For the eighth experiment, a foamed metal conducting link mounted to ceramic plate was driven into the liquid-vapor phase with high explosives and expanded into a ceramic void. Figures 1-8 depict the setup for each experiment.

In each plasma experiment, the plasma was created by electrically exploding an array of 0.125 mm diameter tungsten wires with the electrical circuit shown in Figure 9. Current through the tungsten wires (R_s) rapidly heats the wires and raises the resistance of a single wire to about 125 Ω/m . This high resistance overdamps the circuit and reduces the current to a very low level. This period is known as the "pause" in exploding wire technology. After a few microseconds, a time proportional to the voltage gradient in the wire, the tungsten wires begin conducting along the surface of the wire, producing a plasma that rapidly expands and fills the cavity. The resistance of the cavity becomes very low, and the capacitor discharges through the low resistance to produce the traces shown in Figures 10 through 17. Peak currents in our experiments were usually about 1.5×10^5 A. Detonations were timed so that the cavity walls began moving inward at about the time of peak current. In a period of about one to a few microseconds (depending on cavity dimensions and wall velocity) the cavity would close, hopefully opening the circuit.

Cavity dimensions, predicted cavity closing times, voltage drops across the cavity at closing and ultimate voltage drops are included in Table I.

Discussions

In all experiments with plasma-filled cavities, we recorded voltage-time traces similar to those in Figures 18a or 18b. Our interpretation of these traces follows:

1. A voltage rise to Point A is associated with the reduction in cross section of the current-carrying

cavity. This point corresponds closely to the predicted time of closure of the cavity.

2. At or near closure, competing processes occur. Glass from the cavity wall mixes with and cools the plasma. At the same time the plasma/glass mixture is raised to high temperatures and pressures by the collision of the glass walls, each moving at 2-4 mm/ μ s. At these extreme pressures and temperatures materials normally considered nonconducting become poor to fair conductors, allowing the capacitor to continue discharging through a high resistance. It is significant that in all shots except No. 2, with wall velocities near 4 mm/ μ s, traces similar to that of Figure 18a were obtained while in Shot No. 2, with a wall velocity of about 2 mm/ μ s, we obtained the trace in Figure 18b.
3. Rarefaction from the outer surfaces cools the glass/plasma system, and the resistance rises (Point B).
4. The system finally finds a path for arc-discharge and discharges the capacitor (Point C).

Points A, B and C are marked on the voltage traces in Figures 11-17. Observations from each experiment are included below:

Experiment 1 (Figure 1). No voltage trace was obtained. The current trace in Figure 10 indicates that restrike occurred very soon after the detonation front reached the cavity wall which consisted of a single sheet of window glass. End electrodes were aluminum. When the thin glass wall moved inward enough to clear the end electrode, restrike through the explosion products could occur. To correct this problem, each cavity wall should be at least one-half of the cavity thickness and the end electrodes insulated.

Experiment 2 (Figure 2). Each cavity wall was glass >25 mm thick. The driver consisted of a 0.3 m diameter plane wave generator machined to the cavity dimensions, plus two each

25-mm-thick PBX 9404 charges (Figure 2). C-4 explosive was placed around the edge and tapered outward to prevent sharp discontinuities. As shown in Figure 11, we did interrupt the current but the extremely thick glass walls lowered the closing velocity and thus lengthened closing time.

Experiment 3 (Figure 3). In this experiment we used 12.5-mm-thick glass walls to decrease cavity closure time. To simplify the setup, the cavity was constructed in a phenolic sheet. Since the explosive charge extended well past the cavity, we did not machine the explosive. The voltage trace (Figure 12) indicates that the voltage increased predictably in time until cavity closure. At this point, discharge continued through a high resistance, which may be the phenolic sheet under explosive pressure.

Experiment 4 (Figure 4). Same cavity dimensions as in Experiment 3 but constructed with glass on all sides of the cavity (replacing the phenolic), and the explosive charge machined to the cavity dimensions. Results were similar to those obtained in Experiment 3 up to time of closure.

Experiment 5 (Figure 5). Due to concern over possible edge effects, the cavity for this experiment was widened from 50 mm to 200 mm. The cavity was also shortened to 50 mm in order to utilize explosive charges on hand. The voltage trace (Figure 14) is similar in shape to that of the previous experiment. Total voltage drop at the knee (Pt. A) is only about two-thirds that in Experiment 4. Since, however, the width was quadrupled and the length halved it would appear that the conductivity at closure was reduced. The system is too complex, however, to formulate rules for conductivity from these limited data.

Experiment 6 (Figure 6). We conducted this experiment and the next with cylindrical cavities, which have the advantage of zero edge effect. They suffer from the disadvantages of large travel distances for large cross sections, and the fact that

temperatures and pressures upon closure about a centerline are far greater than for plane collisions. Explosives are also more difficult to obtain in hollow cylindrical form than in flat sheets.

The voltage trace (Figure 15) is classic for our interpretation of this event. The voltage drop at the knee was disappointingly low; especially for the small (12-mm ID) cross section and 100-mm length. The low value, however, is consistent with the increased temperature and pressure expected for a cylinder collapsing about the centerline.

Experiment 7 (Figure 7). The purpose of this experiment was to obtain the advantages of a cylindrical configuration without the extreme plasma temperatures due to cylindrical collapse. We placed a porous fritted glass tube filled with sand on the centerline of the cavity, hypothesizing that the collapsing cavity wall would force the plasma through the tube into the sand-filled center. This should cool the plasma and open the circuit. The cavity wall then would collapse, not onto itself at the center, but upon a distended material removed from the centerline. The high pressure and temperature at collapse then would be avoided, at least for several microseconds.

The voltage trace (Figure 16) shows that this objective was partially achieved. Because the pore size in the fritted glass used for this experiment was too small for the flow rate needed, the pressure and temperature in the plasma were high, with a resulting increase in conductivity. Larger pore size or openings in the central tube are suggested.

Experiment 8 (Figure 8). In this experiment we cemented a distended aluminum link to an aluminum ceramic plate and placed the explosive charge on the other side. A Chart D hydrocode analysis predicted that the explosive shock wave transmitted through the ceramic plate would drive the distended aluminum into the liquid-vapor stage. The liquid-vapor phase aluminum,

still the current-carrying link, then would expand into a ceramic cavity. The ceramic backup plate, following behind the aluminum, should merge with the ceramic cavity and seal off the conducting path.

The current and voltage trace (Figure 17) show that an increased impedance was obtained. We offer no analysis of this event from the limited data on hand.

Conclusions

We were able to construct low-impedance plasma links in glass-lined cavities by exploding tungsten filaments in the cavities. These links provide relatively low impedance paths through which large currents can be carried for long periods of time. We were able to close the cavities at times independent of the current source with high explosives, thereby raising the impedance of the cavity and causing voltage drops that could be used for switching very large electric currents. Since the energy for switching was applied externally, no energy was absorbed from the circuit for the purpose of opening the switch. Also, since closure need not be effected until near peak current, the output of compressed magnetic field generators is not degraded.


Apparently at or near closure, competing processes limit the voltage drop across the switch. Further work to evaluate and reduce or control these processes is suggested. Also further work to evaluate quantitatively the conductivity vs. time of the switch should be conducted so that switches of other sizes and configurations can be designed for specific needs.

All plane wave detonations were initiated with single point initiated plane wave lenses. These lenses would be impractical for large switches. The mesh-initiation process developed at Sandia Laboratories would be applicable to large switches. Mesh initiation can also be applied to cylindrical devices.


TABLE I
CONFIGURATIONS AND RESULTS

Experiment No.	Cavity Dimensions (mm ²)			Predicted Closure Time (μs)	Voltage Drop (kV)	
	Width	Length	Thickness		Closure	Ultimate
1	100	150	25	2	Not Recorded	
2	100	150	25	4	22	64
3	50	100	25	2	38	41
4	50	100	25	2	33	61
5	200	50	25	2	23	148
Diameter (mm)						
Center						
	Cavity	Tube	Length			
6	12	0	100	1	19	97
7	50	15.8	100	2	21	175
Distended Aluminum Link (mm)						
	Width	Length	Thickness			
8	75	100	1.5	--	24	24


Tungsten Wires

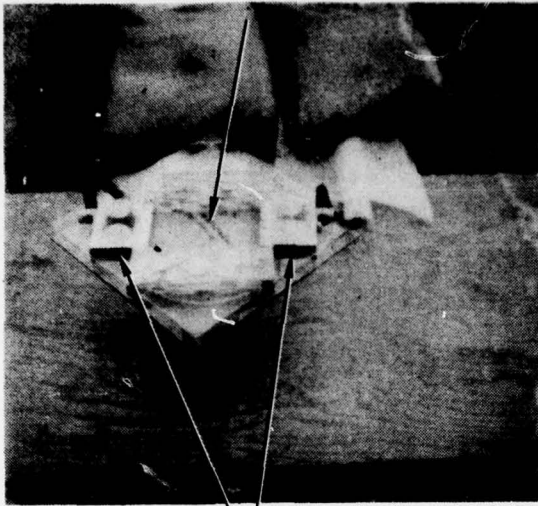

Aluminum Electrodes

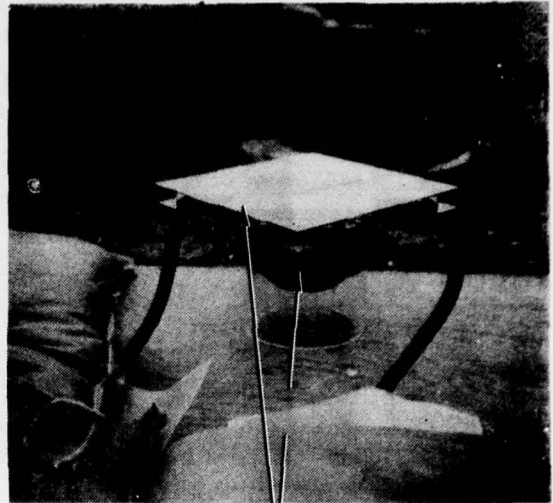

Glass Cavity Liner

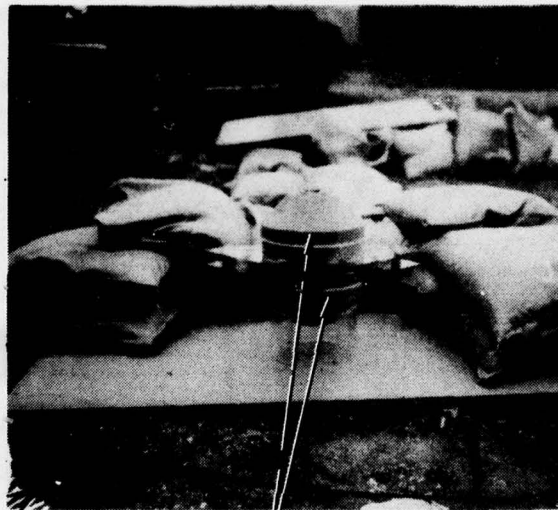


Plane-Wave Lenses

Figure 1. Setup Photographs for Experiment No. 1

Tungsten-
Wires

Phenolic
Insulators

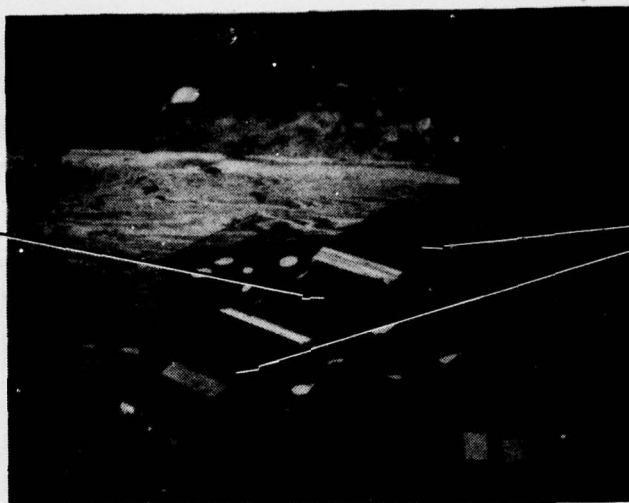

Plane-
Wave
Lens

Thick
Glass

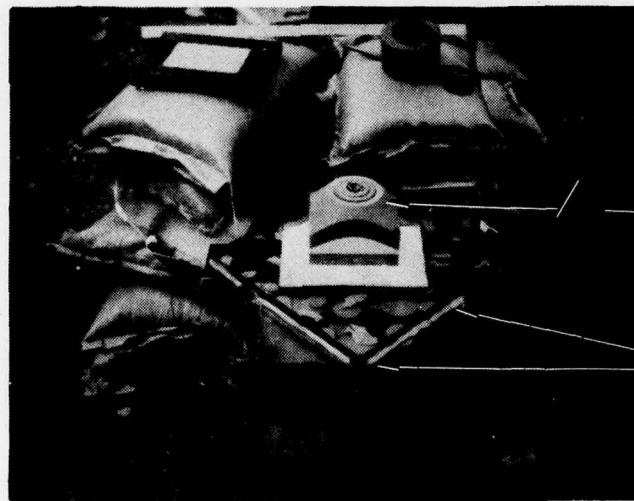


Figure 2. Setup Photographs for Experiment No. 2



Cavity



Plane-
Wave
Lens

Figure 3. Setup Photographs for Experiment No. 3



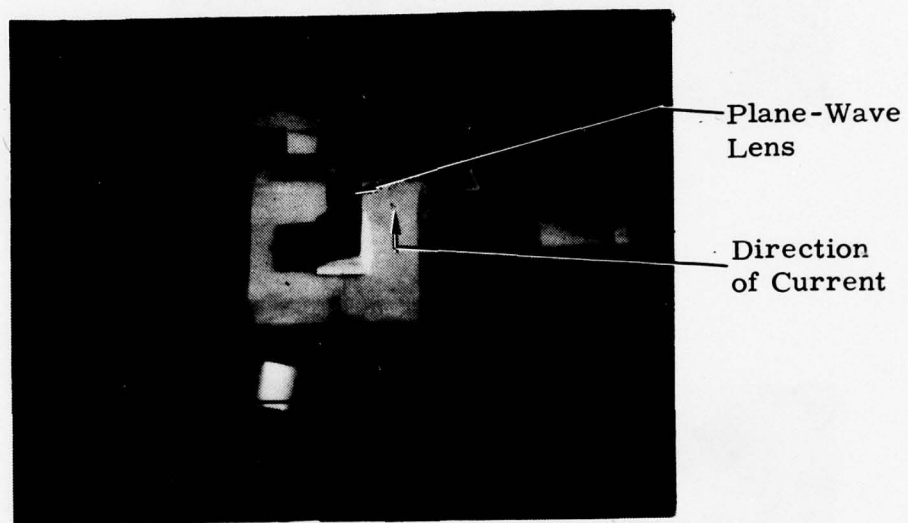


Figure 4. Setup Photograph for Experiment No. 4

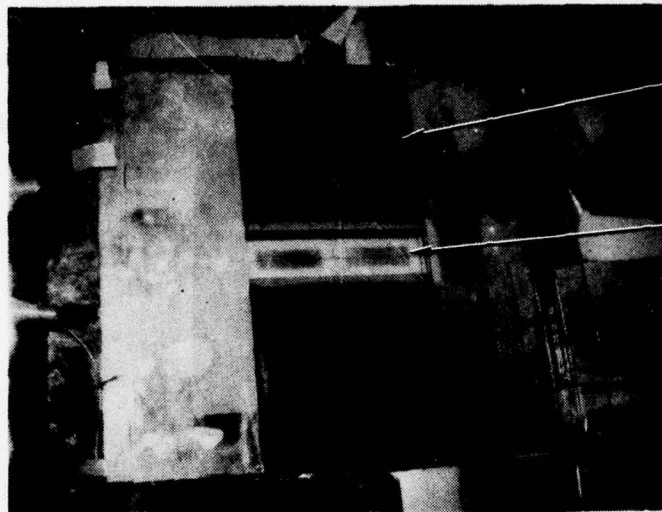

Phenolic
Insulators

Tungsten
Wires

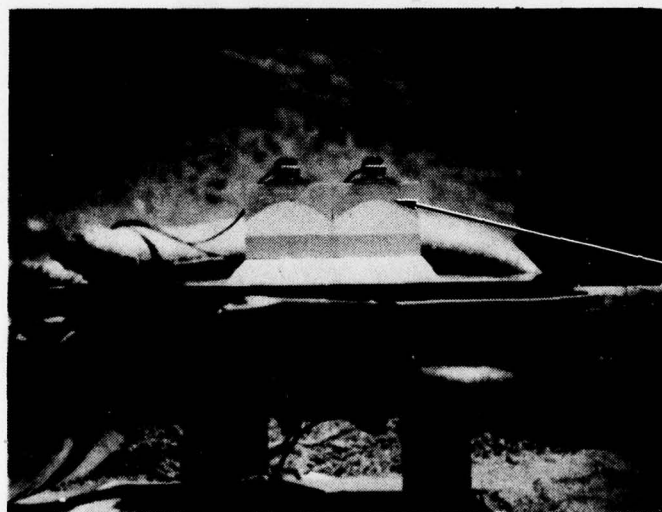

Plane-
Wave
Lenses

Figure 5. Setup Photographs for Experiment No. 5

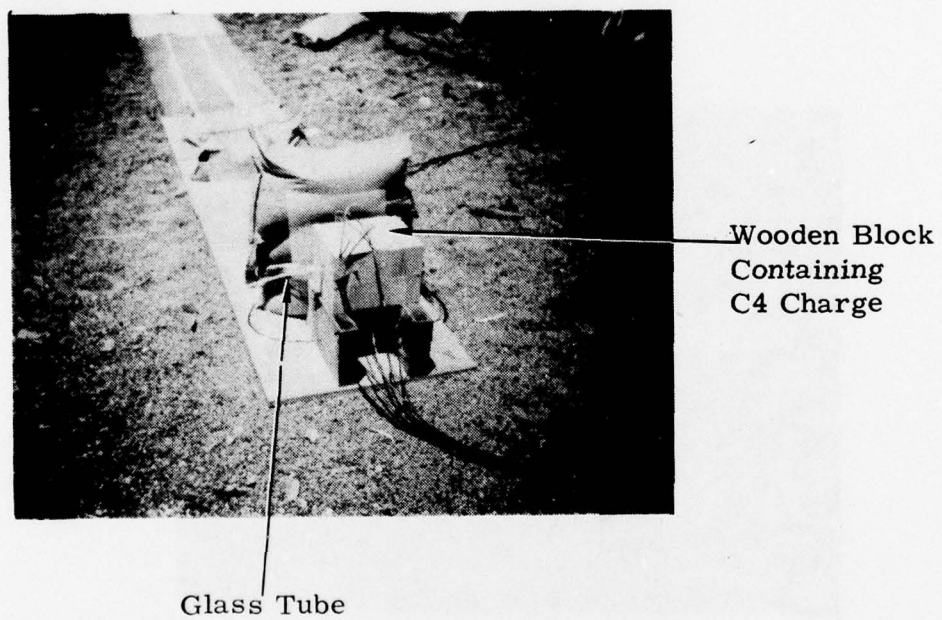
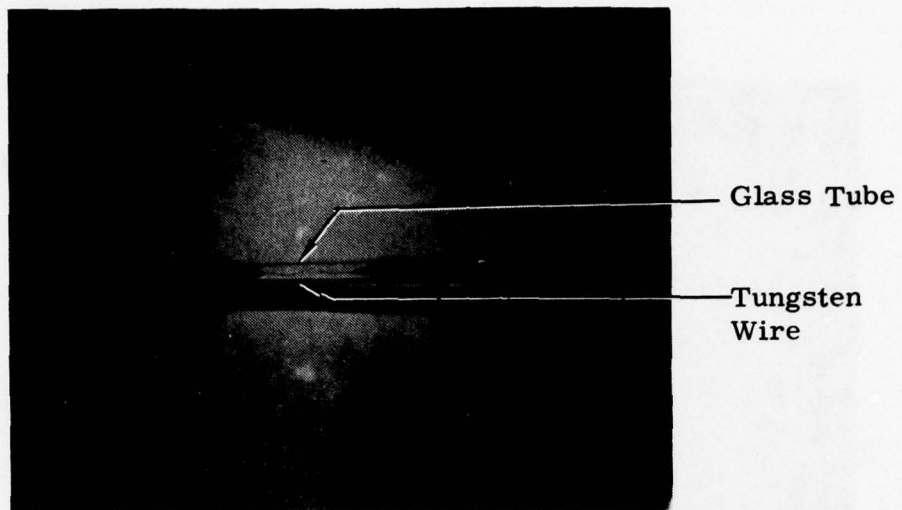


Figure 6. Setup Photographs for Experiment No. 6

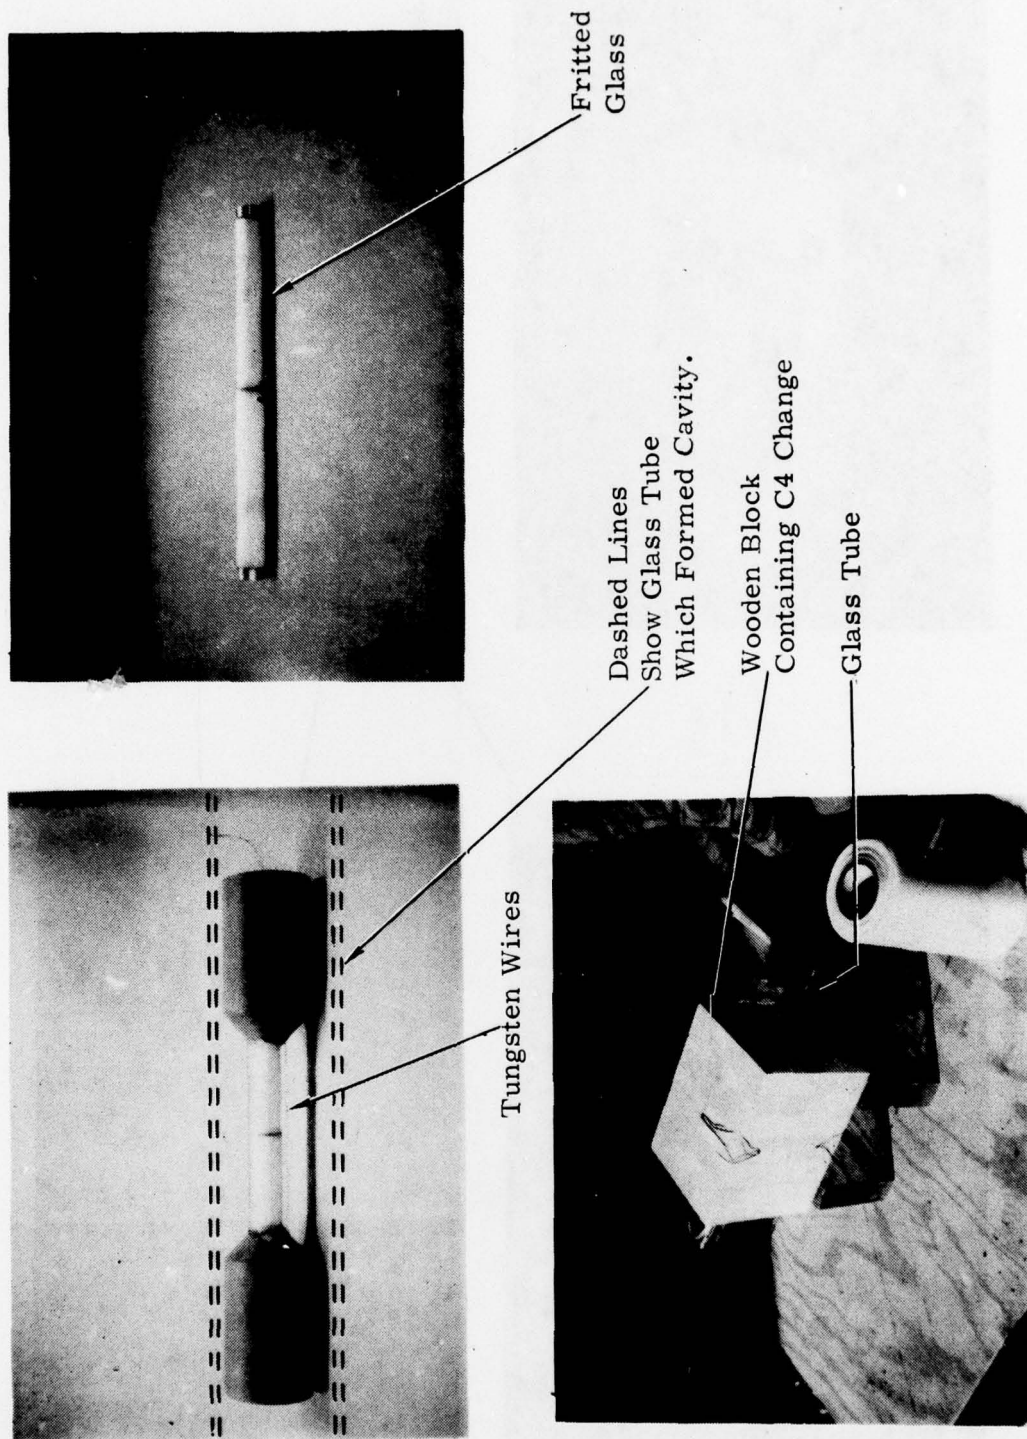


Figure 7. Setup Photographs for Experiment No. 7

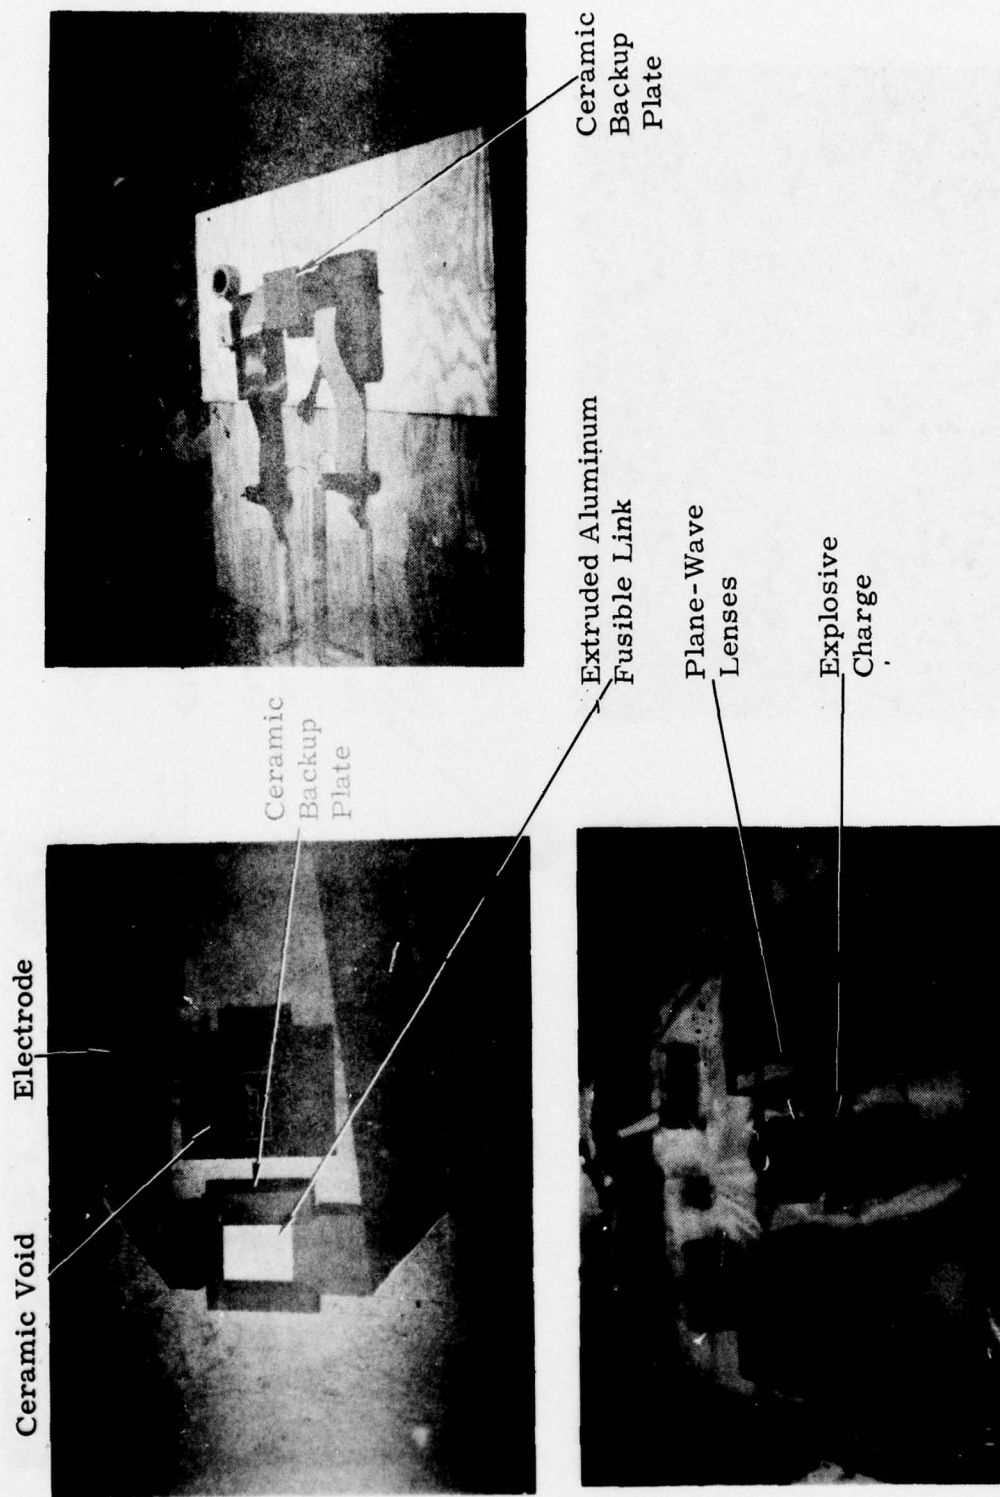


Figure 8. Setup Photographs for Experiment No. 8

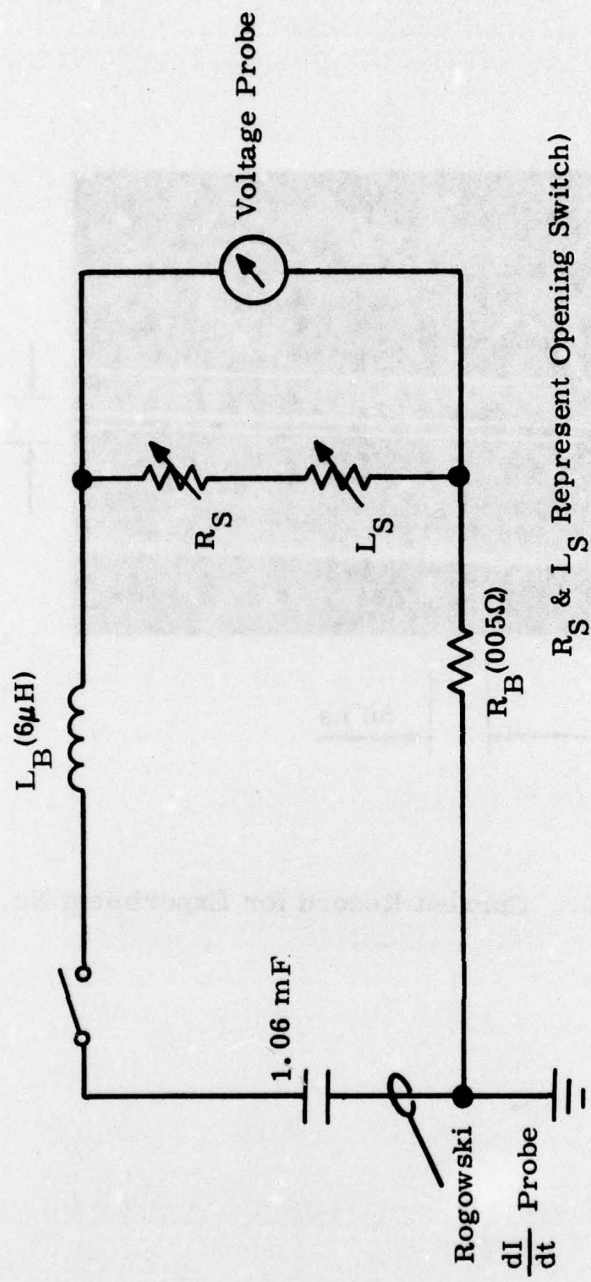


Figure 9. Circuit for Opening Switch Experiments

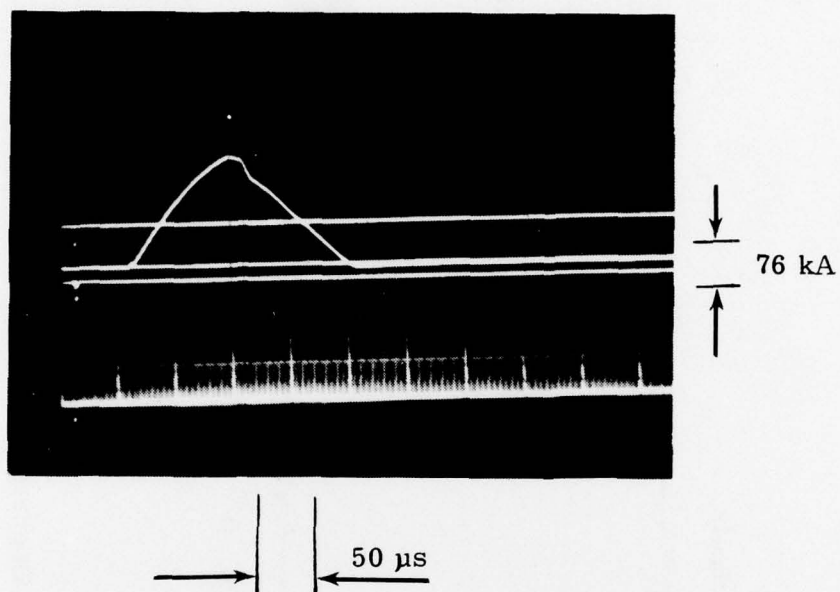


Figure 10. Current Record for Experiment No. 1

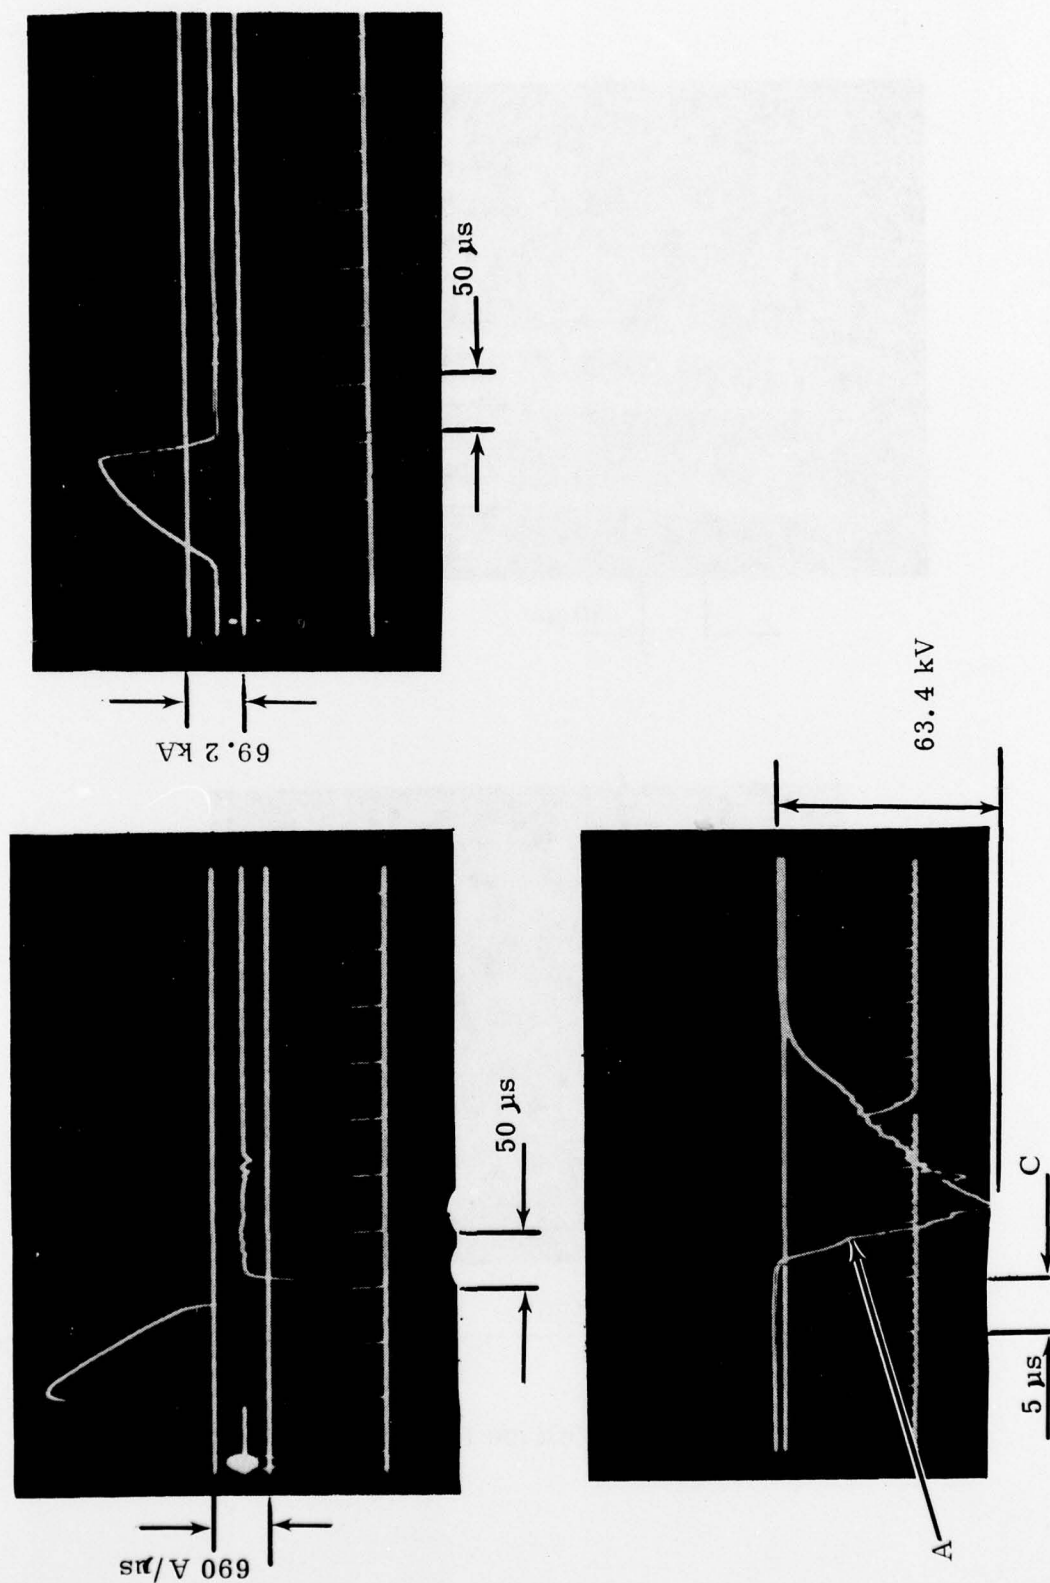


Figure 11. IDOT, Current and Voltage Records for Experiment No. 2

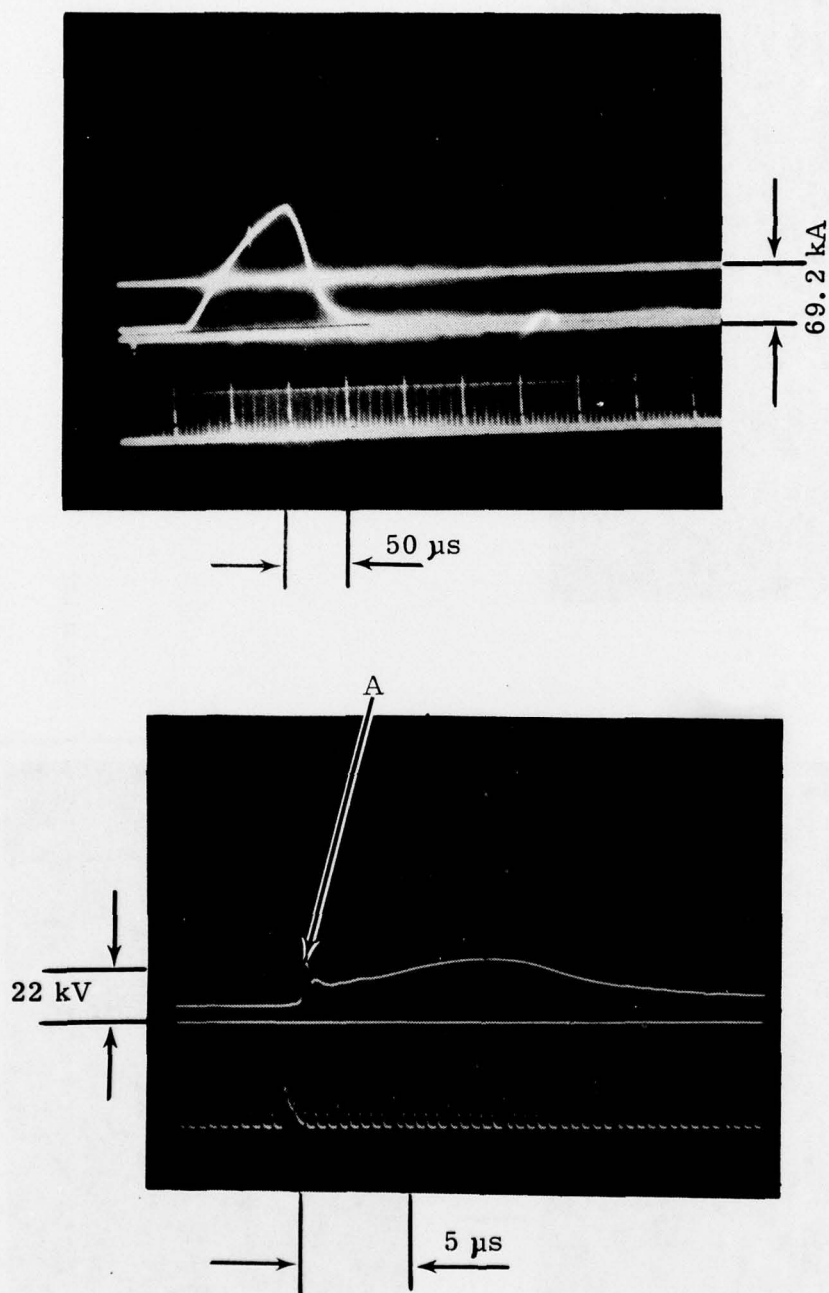


Figure 12. Current and Voltage Records for Experiment No. 3

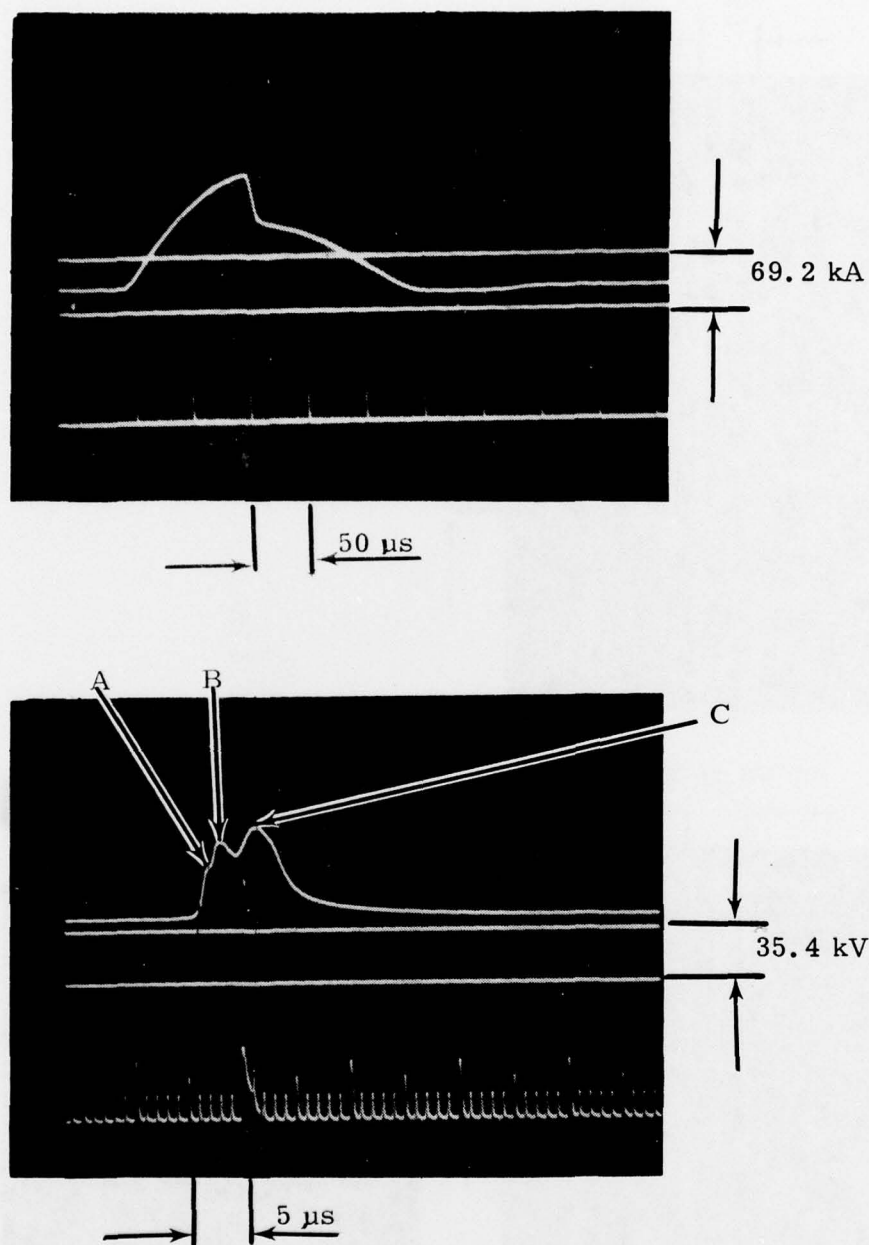


Figure 13. Current and Voltage Traces for Experiment No. 4

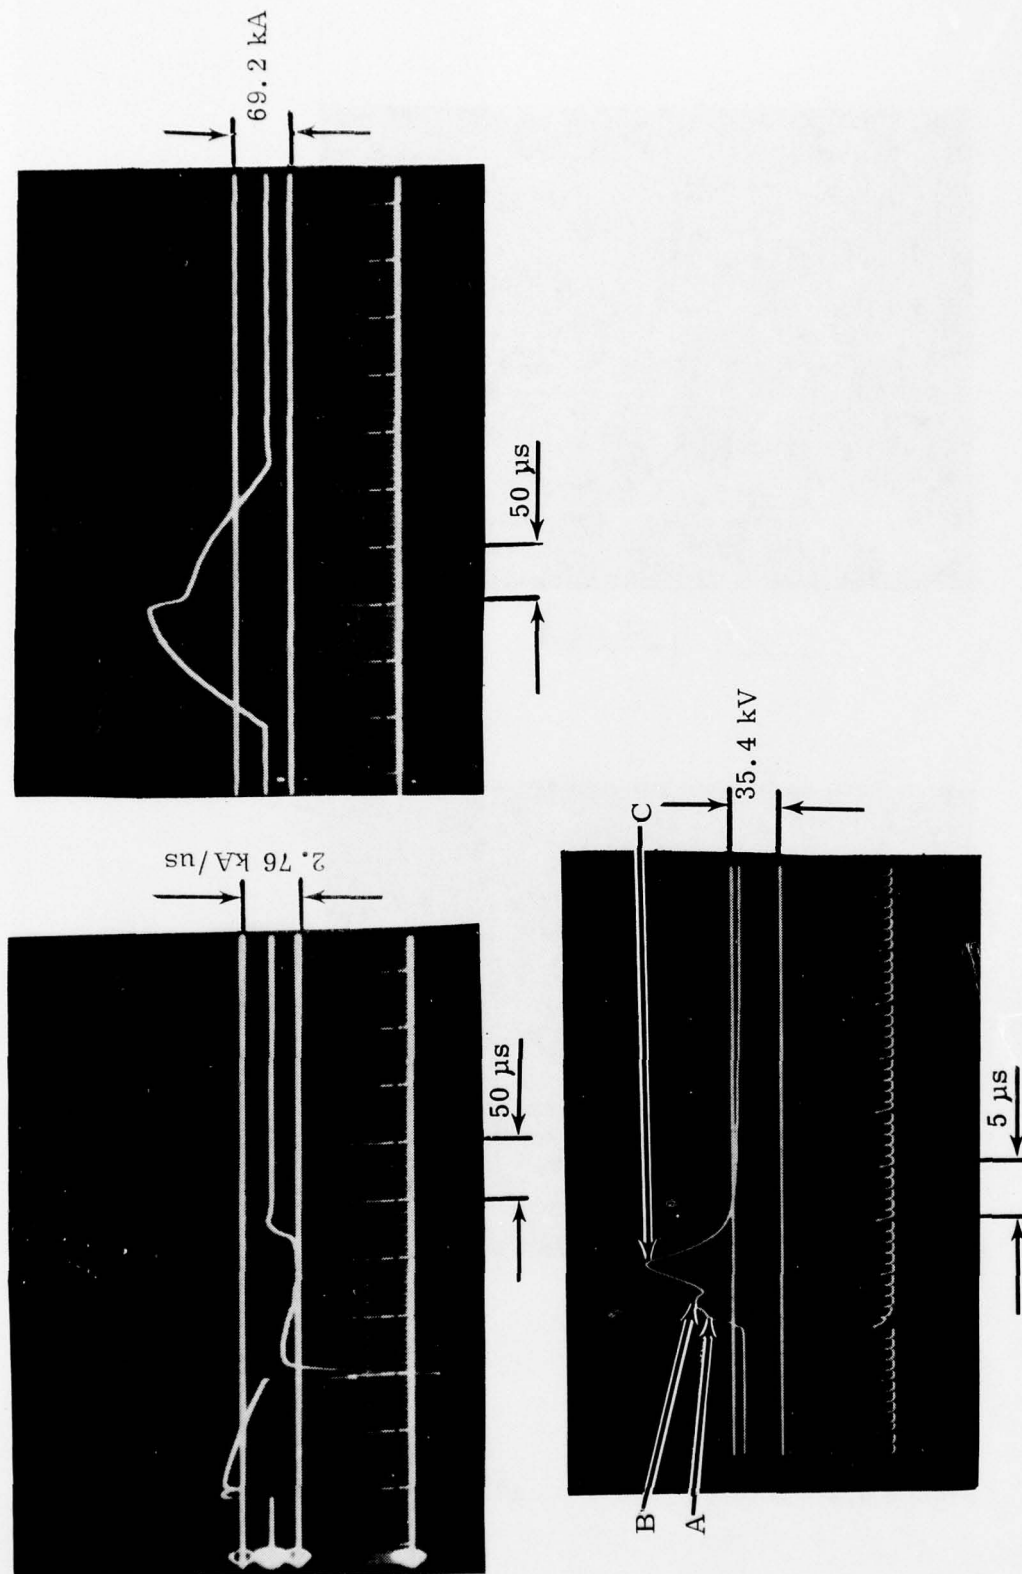


Figure 14. IDOT, Current & Voltage Records for Experiment No. 5

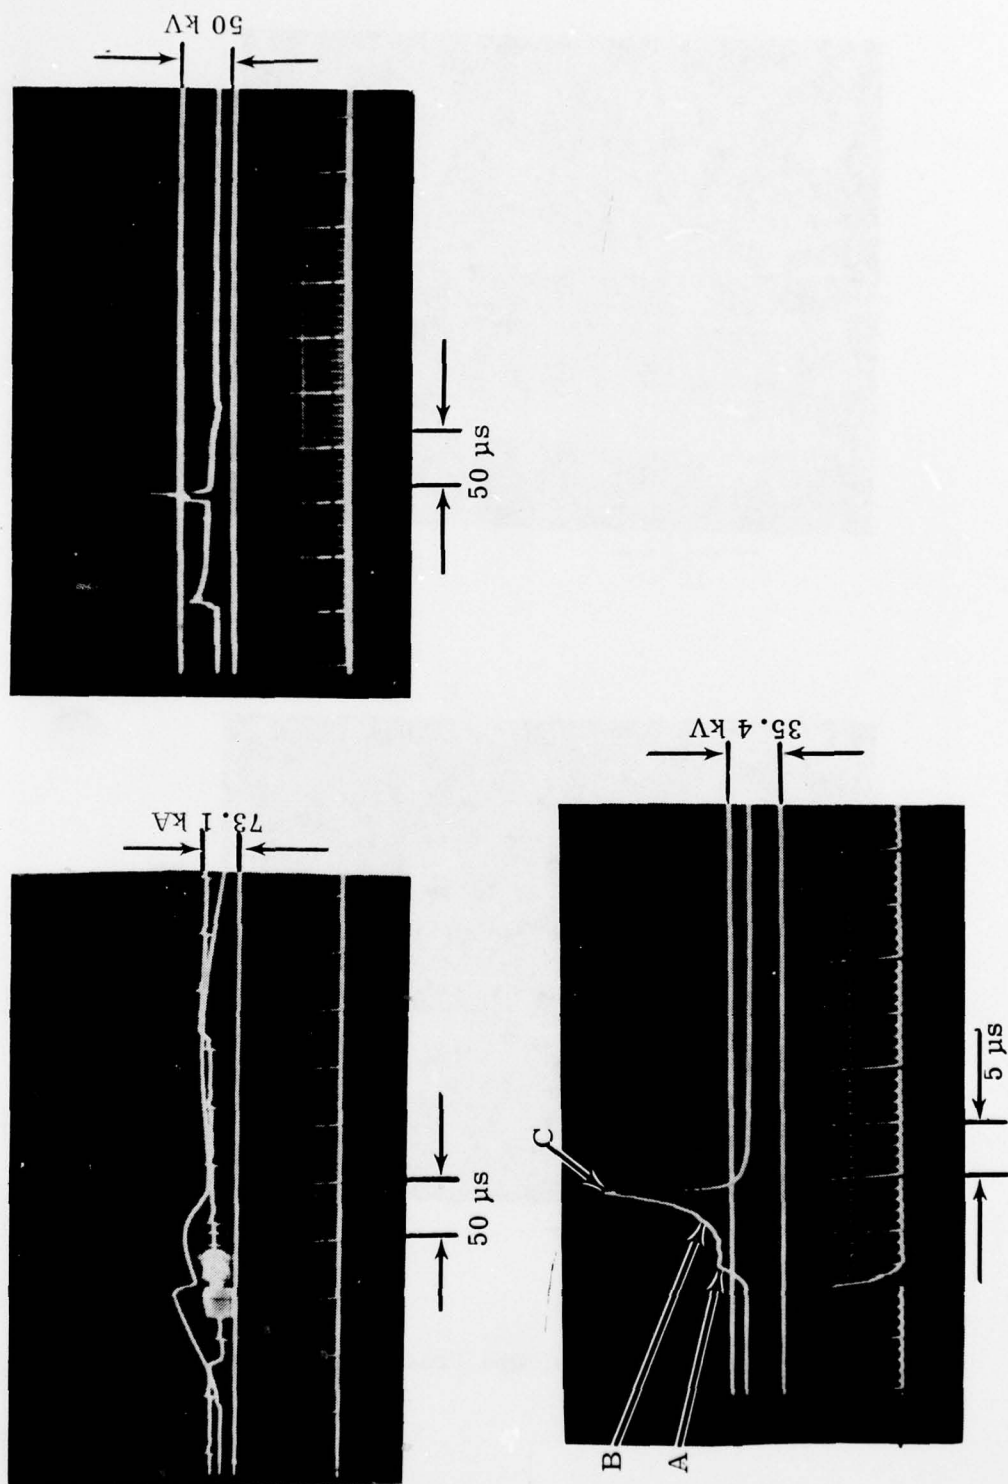


Figure 15. Current and Voltage Traces for Experiment No. 6

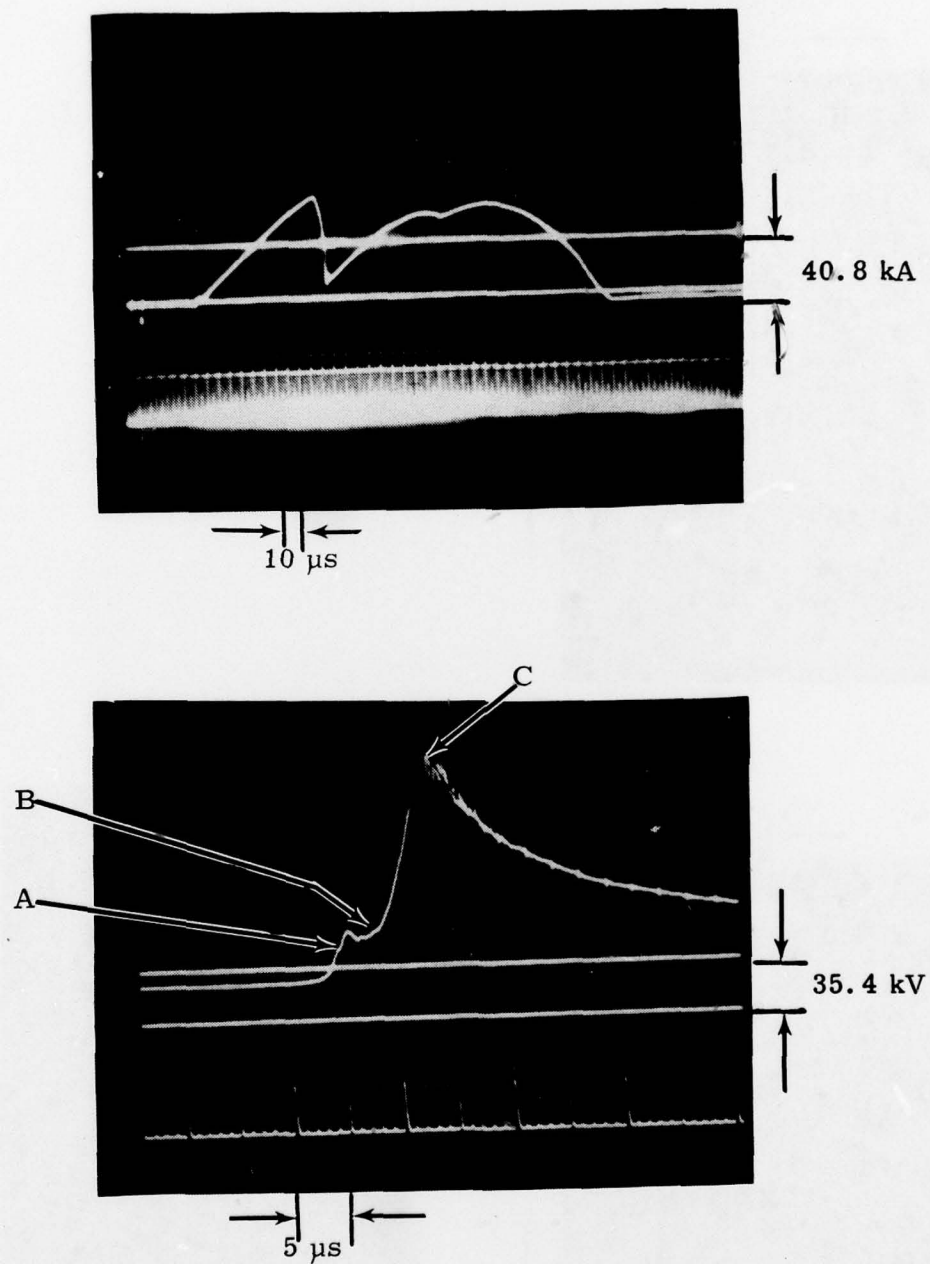


Figure 16. Current and Voltage Traces for Experiment No. 7

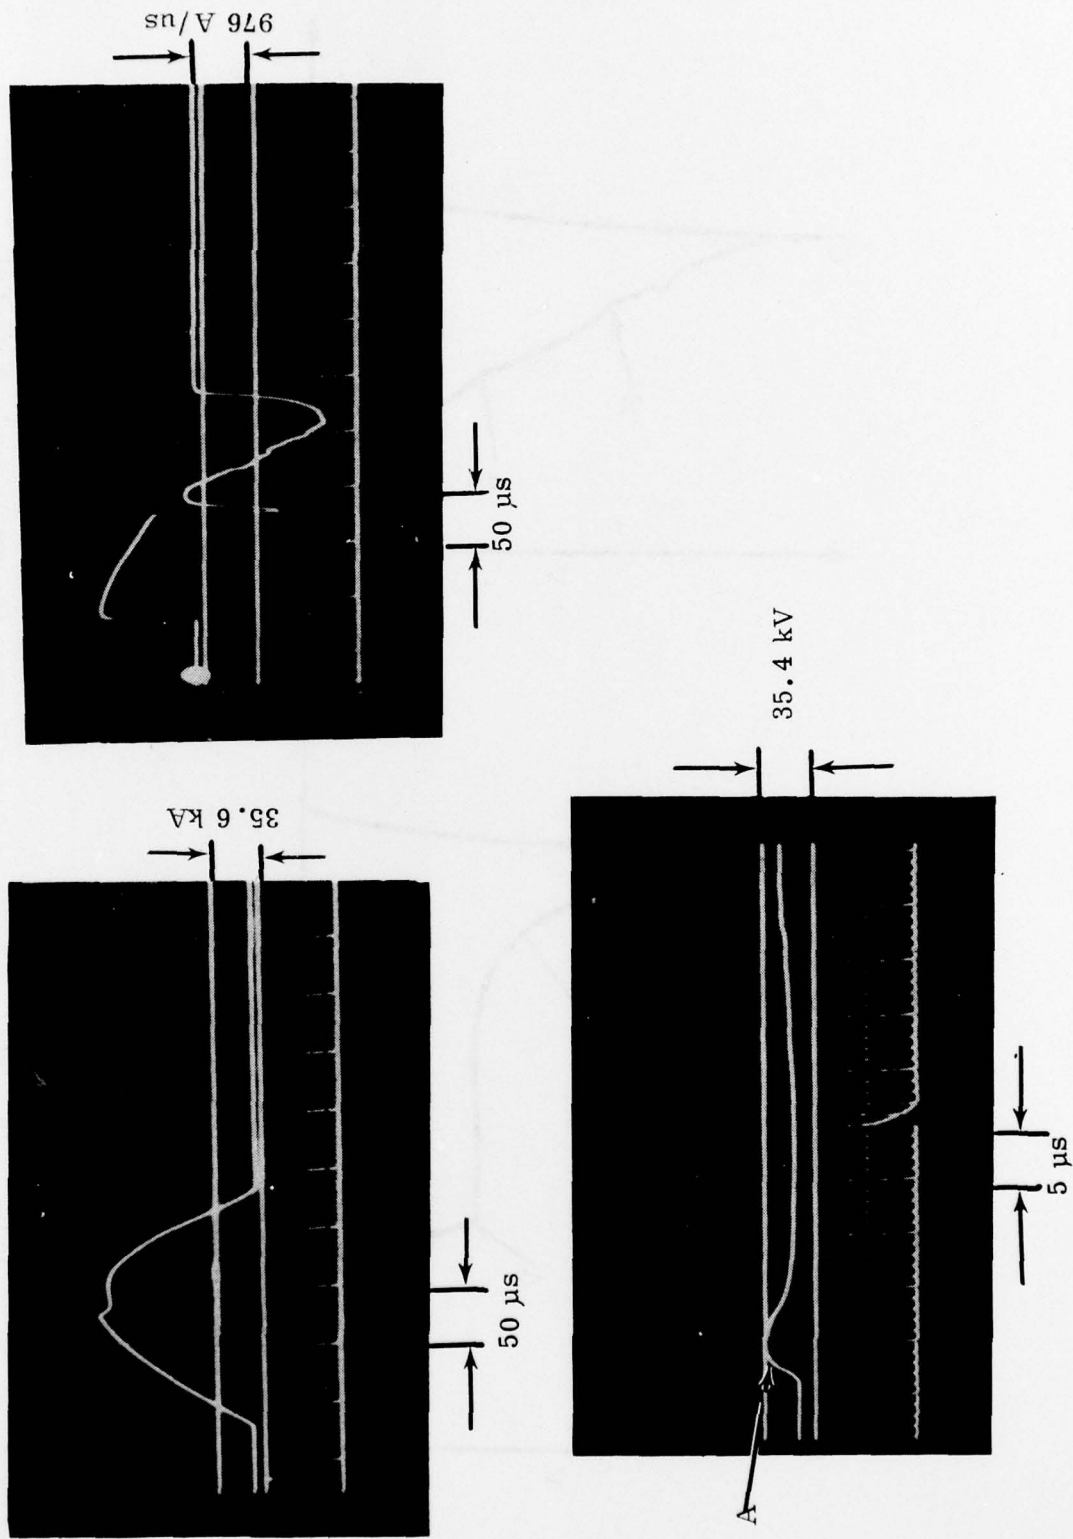


Figure 17. Current, IDOT and Voltage Traces Experiment No. 8

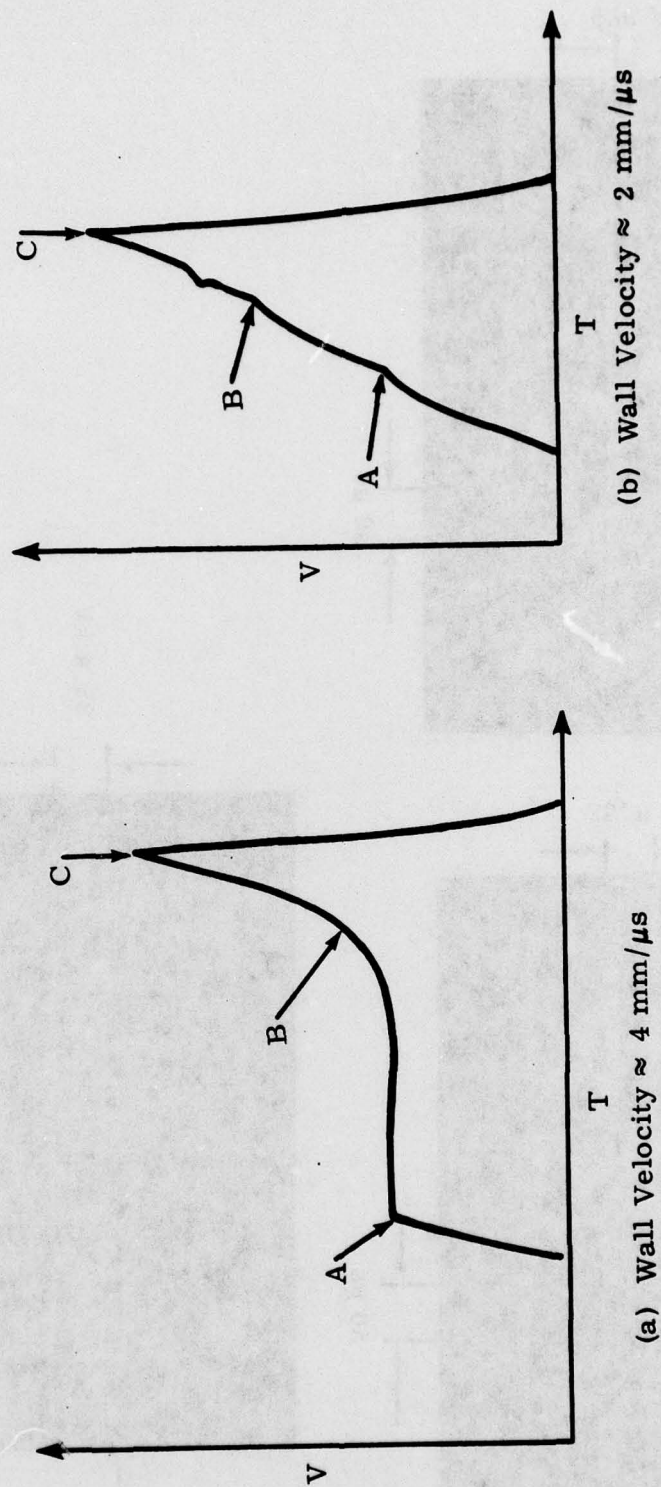


Figure 18. Typical Voltage-Time Traces for Explosively Actuated Fast Opening Switches

DISTRIBUTION:

AFWL/DYP Capt. D. L. Johnson (25)
2160 C. B. McCampbell
2165 J. H. Gover
2510 D. H. Anderson
2513 J. F. Kennedy
2515 E. A. Kjeldgaard
5131 P. L. Stanton
5131 L. W. Davison
5131 T. J. Tucker
5131 R. A. Graham
5163 D. E. Munson
5167 B. M. Butcher
5200 E. H. Beckner
5210 J. B. Gerardo
5230 M. Cowan
5232 W. Beezhold
5233 M. J. Forrestal
5233 R. I. Butler (25)
5233 E. C. Cnare
5233 B. W. Duggin
5240 G. Yonas
5244 P. A. Miller
5245 T. H. Martin
5245 G. L. Neau
5246 K. R. Prestwich
5246 G. L. Hohwein
8412 S. G. Cain
9300 W. A. Gardner
9340 W. E. Caldes
9350 F. W. Neilson
9355 F. H. Mathews
3151 W. L. Garner (3)
8266 E. A. Aas (2)
3171-1 R. P. Campbell (25) for DOE/TIC