

AD-A059 008

ARINC RESEARCH CORP ANNAPOLIS MD

USER DELAY COST MODEL AND FACILITIES MAINTENANCE COST MODEL FOR--ETC(U)

MAY 78 L B GREENE, J WITT

DOT-TSC-1173-3

F/G 1/5

UNCLASSIFIED


FAA-AFF-220-78-01-3

NL

1 OF 1  
AD  
A059008



END  
DATE  
FILMED  
11-78  
DDC

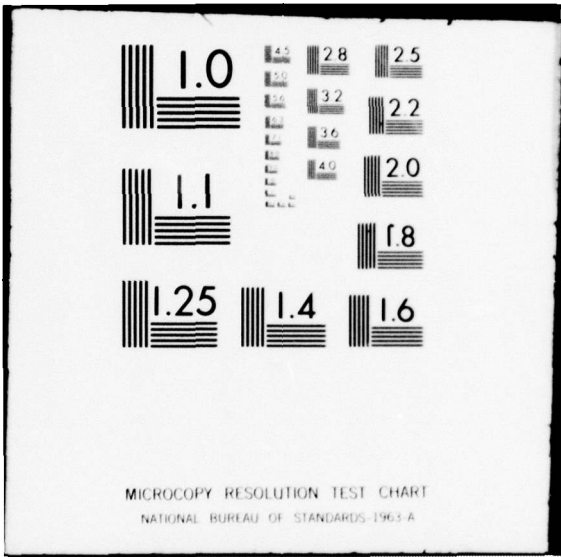

# LEVEL

II

12

REPORT NO. AAF-220-78-01, III

AD A059008

DDC FILE COPY

## USER DELAY COST MODEL AND FACILITIES MAINTENANCE COST MODEL FOR A TERMINAL CONTROL AREA

### Volume III: User's Manual and Program Documentation for the Facilities Maintenance Cost Model


L. B. Greene  
J. Witt  
M. Sternberg-Powidzki

ARINC RESEARCH CORPORATION  
2551 RIVA ROAD  
ANNAPOLIS MD 21401



MAY 1978

FINAL REPORT



DOCUMENT IS AVAILABLE TO THE U.S. PUBLIC  
THROUGH THE NATIONAL TECHNICAL  
INFORMATION SERVICE, SPRINGFIELD,  
VIRGINIA 22161

Prepared for

U.S. DEPARTMENT OF TRANSPORTATION

FEDERAL AVIATION ADMINISTRATION  
Airway Facilities Service  
Washington DC 20590

78 09 21 021

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the object of this report.

Technical Report Documentation Page

1. Report No. AAF-220-78-01, III		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle USER DELAY COST MODEL AND FACILITIES MAINTENANCE COST MODEL FOR A TERMINAL CONTROL AREA, VOLUME III: USER'S MANUAL AND PROGRAM DOCUMENTATION FOR THE FACILITIES MAINTENANCE COST MODEL		5. Report Date May 1978		6. Performing Organization Code	
7. Author(s) L. B. Greene, J. Witt, M. Sternberg-Powidzki		8. Performing Organization Report No. DOT-TSC-FAA-78-1, III		9. Performing Organization Name and Address ARINC Research Corporation* a Subsidiary of Aeronautical Radio, Inc. 2551 Riva Road Annapolis MD 21401	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Airway Facilities Service Washington DC 20590		10. Work Unit No. (TRAIS) FA849/R8138		11. Contract or Grant No. DOT-TSC-1173-3	
15. Supplementary Notes *Under contract to: U.S. Department of Transportation Research and Special Programs Administration Transportation Systems Center Cambridge MA 02142		13. Type of Report and Period Covered Final Report March - September 1976		14. Sponsoring Agency Code	
16. Abstract <p>The Facilities Maintenance Cost Model (FMCM) is an analytic model designed to calculate expected annual labor costs of maintenance within a given FAA maintenance sector. The model is programmed in FORTRAN IV and has been demonstrated on the CDC Kronos time-sharing system.</p> <p>Model inputs are facility identification data, maintenance support scenarios, and facility reliability and maintainability data.</p> <p>The principal model outputs include the expected annual direct labor and salary costs of maintaining a specific facility type within a sector, the required number of personnel by skill level for that facility type, the costs of preventive maintenance and corrective maintenance, and the costs of call-backs. The model also provides total cost and labor data on all of the facilities within the sector.</p> <p>This is the third of three volumes. Volume I documents the model formulation and demonstration. Volume II is a user's manual and contains the program documentation for the user delay cost model.</p>					
17. Key Words Monte Carlo, User Delay, Maintenance Costs, Terminal Control Area		18. Distribution Statement DOCUMENT IS AVAILABLE TO THE U.S. PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22161			
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 52	22. Price

PREFACE

The Federal Aviation Administration is responsible for operating and maintaining the airway facilities of the National Aviation System. The magnitude of annual operating and maintenance costs is such that means for reducing these costs are being sought.

This report documents the results of a study to model the relationship between airway facility maintenance practices and (1) aircraft delays in terminal areas, and (2) maintenance costs.


These models are intended to serve as tools for estimating the impact on system users and system operators of proposed maintenance cost reduction initiatives.

The models were formulated, demonstrated, and documented by ARINC Research Corporation under contract to the Transportation Systems Center. Mr. F. Frankel of the Transportation Systems Center provided the technical guidance. The dedication and expertise of Mr. L. B. Greene, Dr. J. Witt, and Mr. M. Sternberg-Powidzki of ARINC Research is acknowledged to be the major contribution to this work.

ACCESSION for		
NDG	White Section	<input checked="" type="checkbox"/>
DOC	Buff Section	<input type="checkbox"/>
UNANNOUNCED		<input type="checkbox"/>
JUSTIFICATION.....		
BY.....		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL. and/or	SPECIAL
A		

METRIC CONVERSION FACTORS

Approximate Conversions to Metric Measures				Approximate Conversions from Metric Measures			
Symbol	When You Know	Multiply by	To Find	Symbol	When You Know	Multiply by	To Find
<b>LENGTH</b>							
in	inches	2.5	centimeters	cm	centimeters	0.39	inches
ft	feet	30	centimeters	in	inches	0.4	inches
yd	yards	0.9	meters	m	meters	1.1	feet
mi	miles	1.6	kilometers	km	kilometers	0.6	yards
				m	meters	0.6	miles
<b>AREA</b>							
sq in	Square inches	6.5	Square centimeters	sq in	Square inches	0.16	Square centimeters
sq ft	Square feet	0.09	Square meters	sq m	Square meters	1.2	Square feet
sq yd	Square yards	0.8	Square meters	sq yd	Square yards	0.8	Square meters
sq mi	Square miles	2.6	Square kilometers	sq mi	Square miles	2.6	Square kilometers
acres	Acres	0.4	Hectares	hectares	Hectares	2.5	Acres
<b>MASS (weight)</b>							
oz	ounces	28	grams	g	grams	0.035	Ounces
lb	pounds	0.45	kilograms	kg	kilograms	2.2	Pounds
	short tons (2000 lb)	0.9	tonnes	tonnes	tonnes	1.1	short tons
<b>VOLUME</b>							
lsp	teaspoons	5	milliliters	ml	milliliters	0.034	fluid ounces
Tbsp	tablespoons	15	milliliters	ml	milliliters	0.034	fluid ounces
fl oz	fluid ounces	30	milliliters	l	liters	1.06	quarts
c	cups	0.24	liters	qt	quarts	0.24	liters
pt	pints	0.47	liters	l	liters	0.26	quarts
qt	quarts	0.95	liters	gal	gallons	3.8	cubic feet
gal	gallons	3.8	liters	cu yd	cubic yards	1.3	cubic feet
cu ft	cubic feet	0.03	cubic meters	cu m	cubic meters	35	cubic feet
cu yd	cubic yards	0.76	cubic meters	cu yd	cubic yards	1.3	cubic meters
<b>TEMPERATURE (exact)</b>							
F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	F	Fahrenheit temperature	9/5 (then add 32)	Celsius temperature

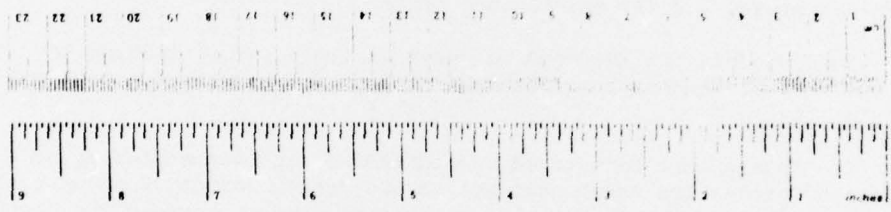

CONTENTS

	<u>Page</u>
CHAPTER ONE: INTRODUCTION . . . . .	1-1
CHAPTER TWO: FACILITIES MAINTENANCE COST MODEL . . . . .	2-1
2.1 Description of the Cost Determination Process . . . . .	2-1
2.2 Overview of the Model and Its Capabilities . . . . .	2-1
CHAPTER THREE: METHOD OF SOLUTION . . . . .	3-1
3.1 Technical Approach to Model Formulation . . . . .	3-1
3.2 Key Cost Categories . . . . .	3-5
3.2.1 Preventive Maintenance . . . . .	3-5
3.2.2 Corrective Maintenance . . . . .	3-5
3.2.3 Direct Maintenance . . . . .	3-6
3.2.4 Personnel Requirements . . . . .	3-6
CHAPTER FOUR: PROGRAM DESCRIPTION . . . . .	4-1
4.1 Operating Environment . . . . .	4-1
4.2 Program Specification . . . . .	4-1
4.3 Subprograms . . . . .	4-1
4.4 Source Listing . . . . .	4-1
4.5 Detailed Flow Charts . . . . .	4-1
CHAPTER FIVE: PROGRAM USE . . . . .	5-1
5.1 Tape Setup . . . . .	5-1
5.2 Input Data . . . . .	5-1
5.3 Model Outputs . . . . .	5-1
5.4 Restrictions and/or Limitations . . . . .	5-9
5.5 Editing and Diagnostics . . . . .	5-9
5.6 Test Case . . . . .	5-9
5.7 Application of the FMCM . . . . .	5-9
CHAPTER SIX: SYMBOLS . . . . .	6-1



LIST OF ILLUSTRATIONS

<u>Figure</u>	<u>Page</u>
2-1. Cost of Maintenance Labor Analysis . . . . .	2-2
3-1. FMCM Logic . . . . .	3-2
3-2. FMCM Logic (Expansion Between Parts 2 and 3) . . . . .	3-4
4-1. Source Listing . . . . .	4-2
4-2. Detailed Flow Chart . . . . .	4-6
5-1. Logan Sector File . . . . .	5-5
5-2. Facility File . . . . .	5-6
5-3. FMCM Output (Part A) . . . . .	5-7
5-4. FMCM Output (Part B) . . . . .	5-7
5-5. FMCM Output (Part C) . . . . .	5-8

LIST OF TABLES

<u>Table</u>	<u>Page</u>
4-1. Summary of Program Source Listing Functions . . . . .	4-5
5-1. Sector Data File (SECFIL) . . . . .	5-2
5-2. FMCM Facilities Data File for Each Facility Type (FACFIL) . . . . .	5-2
5-3. Sector Data File (SECFIL) . . . . .	5-3
5-4. Facilities Input File (FACFIL) . . . . .	5-4
5-5. Summary of Terminal Response Requirements for Normal Program Execution . . . . .	5-11
6-1. Input File Symbols and Definitions . . . . .	6-2
6-2. Intermediate Variable Symbols and Definitions . . . . .	6-3

## CHAPTER ONE

### INTRODUCTION

This program, Facilities Maintenance Cost Model (FMCM), is one of two programs prepared by ARINC Research Corporation for the DOT/Transportation Systems Center (TSC) under project number TSC/420-0137-WD. The purpose of the two programs, or models, is to provide the FAA with management tools to estimate the effect of variation in airway facilities maintenance scenarios on:

- Costs to the user community caused by facility outage
- Costs of corrective and preventive maintenance.

The Facilities Maintenance Cost Model has been designed to address the second issue, while the companion model, the User Delay Cost Model (UDCM), addresses the first.

This report provides the documentation of the FMCM, including a description of the model, a program description, and an example application of the model. It is the third of three reports prepared under contract to TSC. The first report, entitled "User Delay Cost Model and Facilities Maintenance Cost Model for a Terminal Control Area", provides documentation of the entire model development efforts. The second report, entitled "Users' Manual and Program Documentation for the User Delay Cost Model", provides data on the UDCM, comparable to that contained in this report.

## CHAPTER TWO

### FACILITIES MAINTENANCE COST MODEL

#### 2.1 DESCRIPTION OF THE COST DETERMINATION PROCESS

The Facilities Maintenance Cost Model was formulated to evaluate labor costs associated with maintaining FAA facilities within a maintenance sector. The model determines these costs by computing the number of maintenance and supervisory personnel required to perform all corrective maintenance (CM) and preventive maintenance (PM), with proper allowance for personnel productivity. The basic cost-determination process that is modeled is depicted in Figure 2-1. For corrective maintenance, mean time between corrective maintenance actions (MTBCMA) and mean time to restore (MTTR) are used to determine the expected number of corrective maintenance actions and expected repair times per action. For each action, man-hour demands, by skill level, are incurred for direct maintenance action, as well as travel time on level B facilities.\* Man-hour demands are similarly determined for preventive maintenance. Total man-hour requirements are summed over all facility types for the sector. These are then converted to numbers of personnel required for each skill level, and the numbers are then used to determine support personnel. These total manpower requirements are then combined with wage rates and salaries to determine the annual sector labor costs.

#### 2.2 OVERVIEW OF THE MODEL AND ITS CAPABILITIES

It is recognized that personnel costs represent 80 percent of the FAA maintenance costs. Consequently, TSC encouraged the development of a model that would focus on this single key maintenance-cost factor. Therefore, the FMCM has been designed to predict required maintenance staff levels and associated costs on the basis of the expected annual requirements for corrective and preventive maintenance, the desired facility-restoration levels, and personnel productivity factors. The FMCM evaluates the expected direct labor and salary costs for a one-year interval. The model has been formulated to evaluate both the preventive maintenance and corrective maintenance

---

\*There are three facility-restoration levels. Level A facilities are not repaired outside normal working hours. Level B facilities that fail outside normal working hours are repaired, if possible, by calling maintenance personnel back. Facilities subject to level C restoration are attended by three shifts of maintenance personnel on a 24-hour basis.

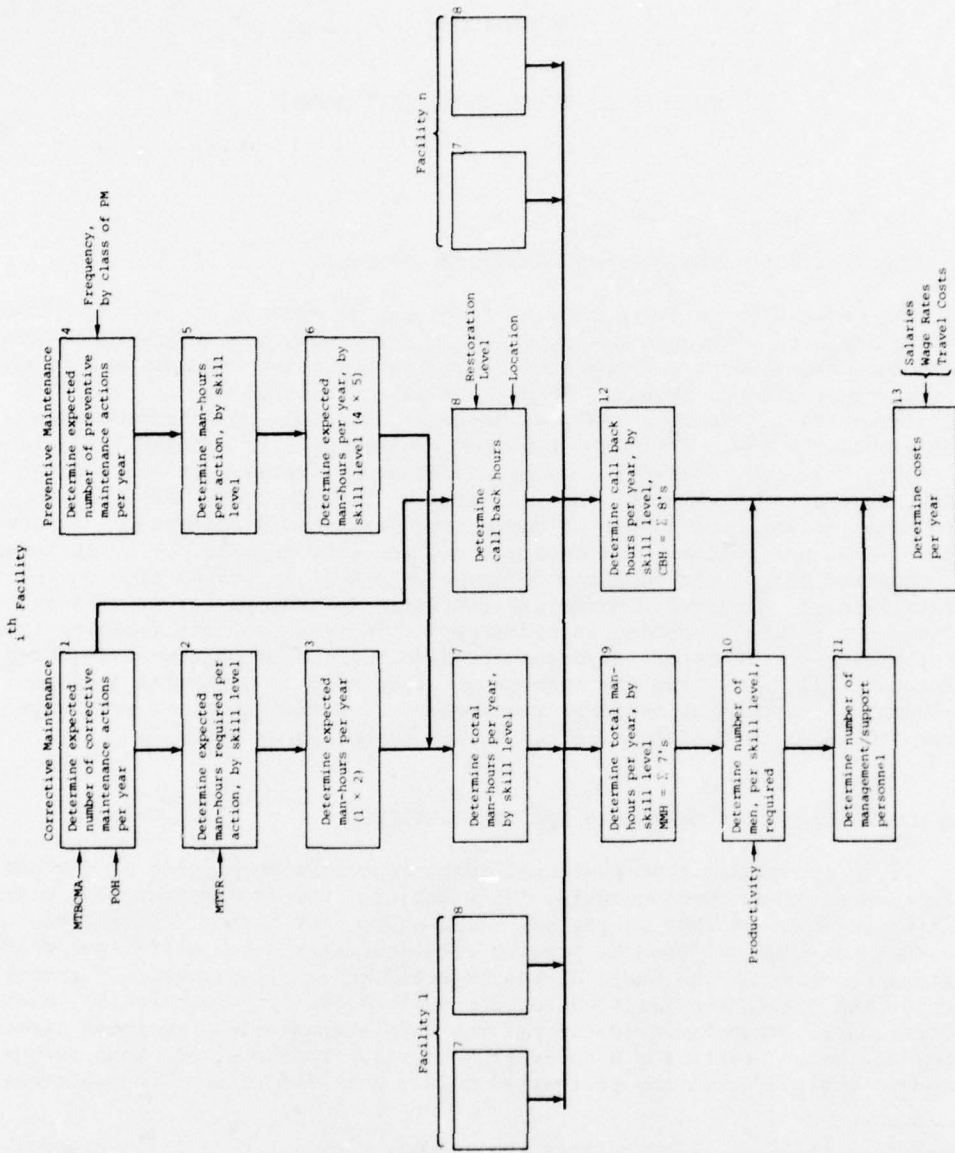


Figure 2-1. COST OF MAINTENANCE LABOR ANALYSIS

required by any single facility type, accumulate staffing and cost data for the facility type within the specified maintenance sector, evaluate all other designated types of facilities within the sector, and accumulate total sector maintenance costs.

The principal model outputs include the expected annual cost of maintaining a specific facility type within a sector, the required number of personnel by skill level for that facility type, the cost of preventive maintenance and corrective maintenance, and the cost of call-backs. The model also provides similar cost and labor data on the total of all facilities within the sector, including management/support personnel requirements and costs.

## CHAPTER THREE

### METHOD OF SOLUTION

#### 3.1 TECHNICAL APPROACH TO MODEL FORMULATION

The FMCM is an analytic model, comprising a set of equations designed to calculate the expected annual labor costs of maintenance within a given maintenance sector. The model is programmed in FORTRAN IV and has been demonstrated on the CDC Kronos time-sharing system. By running the model from a time-sharing terminal, maximum advantage can be taken of its ability to evaluate selected sectors and facilities, print the results, then run again, all in a man-machine interactive mode. A program listing is provided in Figure 4-1 of Chapter Four. Construction of the model required recognition of the predominant effect of labor on maintenance costs and the way in which this labor effect manifests itself on cost. Interviews with maintenance personnel of the New England Region and the Boston Sector were conducted so that maintenance practices common to the FAA and peculiar to the Region could be reflected in the model.

It is significant that, as currently configured, the model does not include costs of spares provisioning or other logistics support costs. These additional costs can be added to the model incrementally without requiring a restructuring of the model as it currently exists.

As shown in Figures 3-1 and 3-2, the model begins by accepting, as a terminal input, the sector file name and then reading in data from the sector file (called SECFIL) describing the overall maintenance characteristics of the sector to be evaluated and data peculiar to each of the facility types within the sector. (These data are shown in Chapter Five.) Then the analyst specifies whether or not he wants every facility type in the sector evaluated. If only selected facility types are desired, he must then input how many of the facility types within the sector will be considered in the analysis, together with their identifiers. The analysis begins by considering each facility type separately. To evaluate each facility type, an additional file (called FACFIL) containing facility data common to all facilities of that type throughout the FAA system is required. A detailed logic flow diagram is provided in Figure 4-2 of Chapter Four.

On the basis of the sector and facility file data, the corrective maintenance (CM), preventive maintenance (PM), and their sum, direct

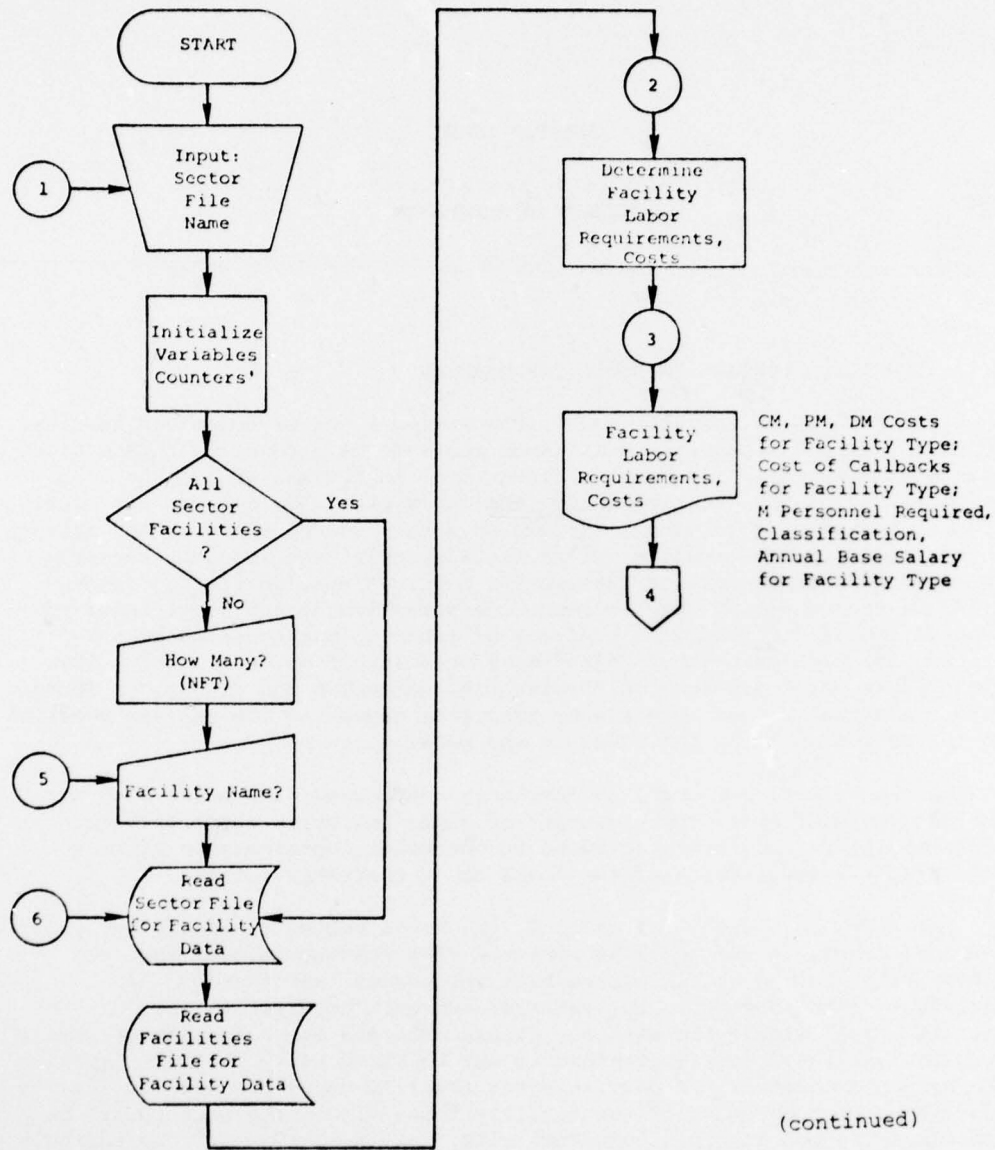


Figure 3-1. FMCM LOGIC

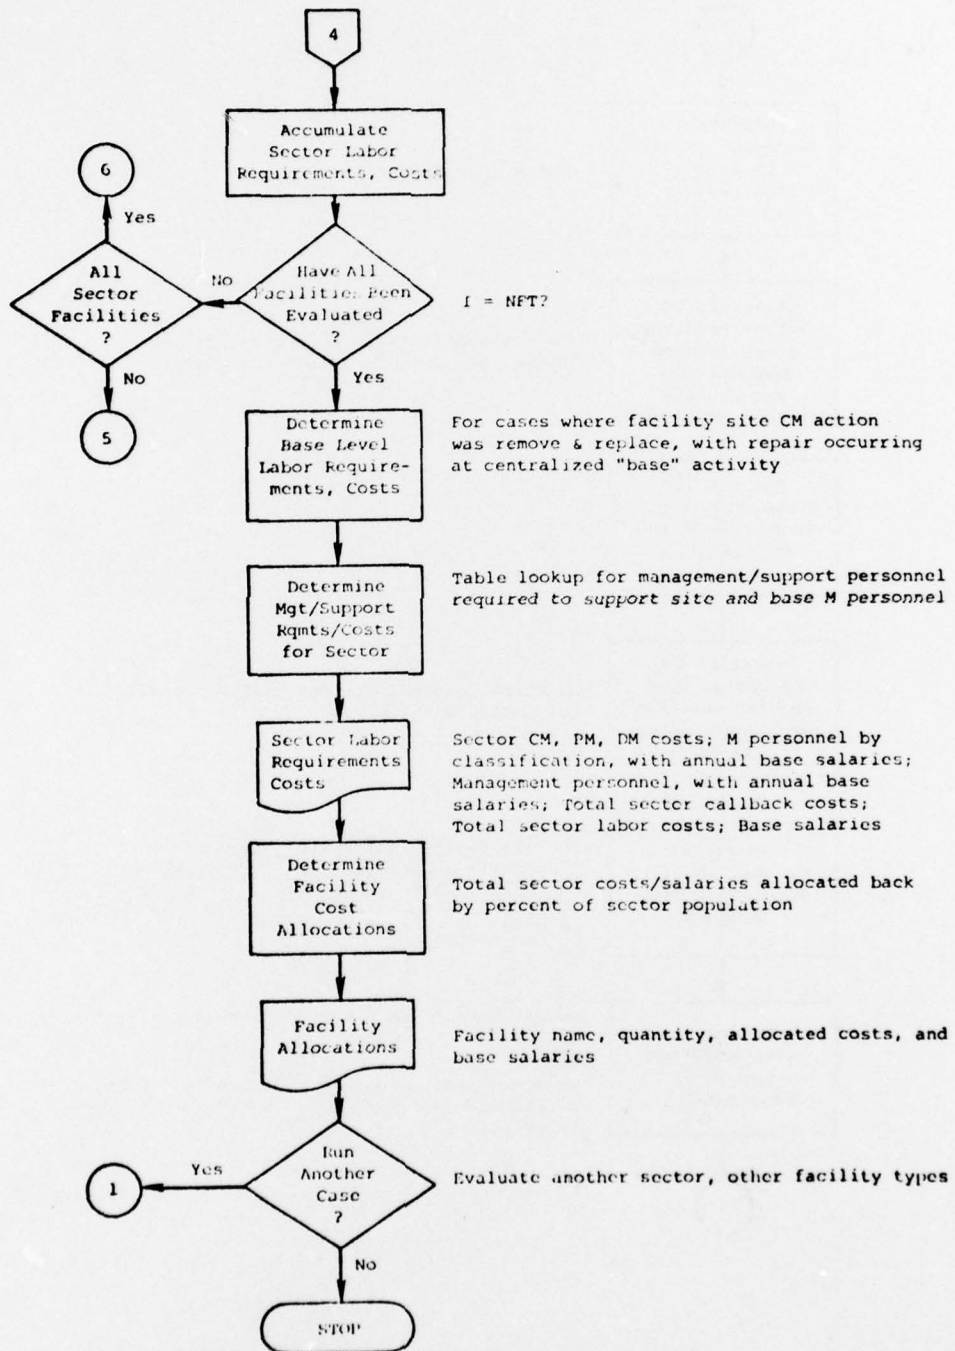


Figure 3-1. (continued)



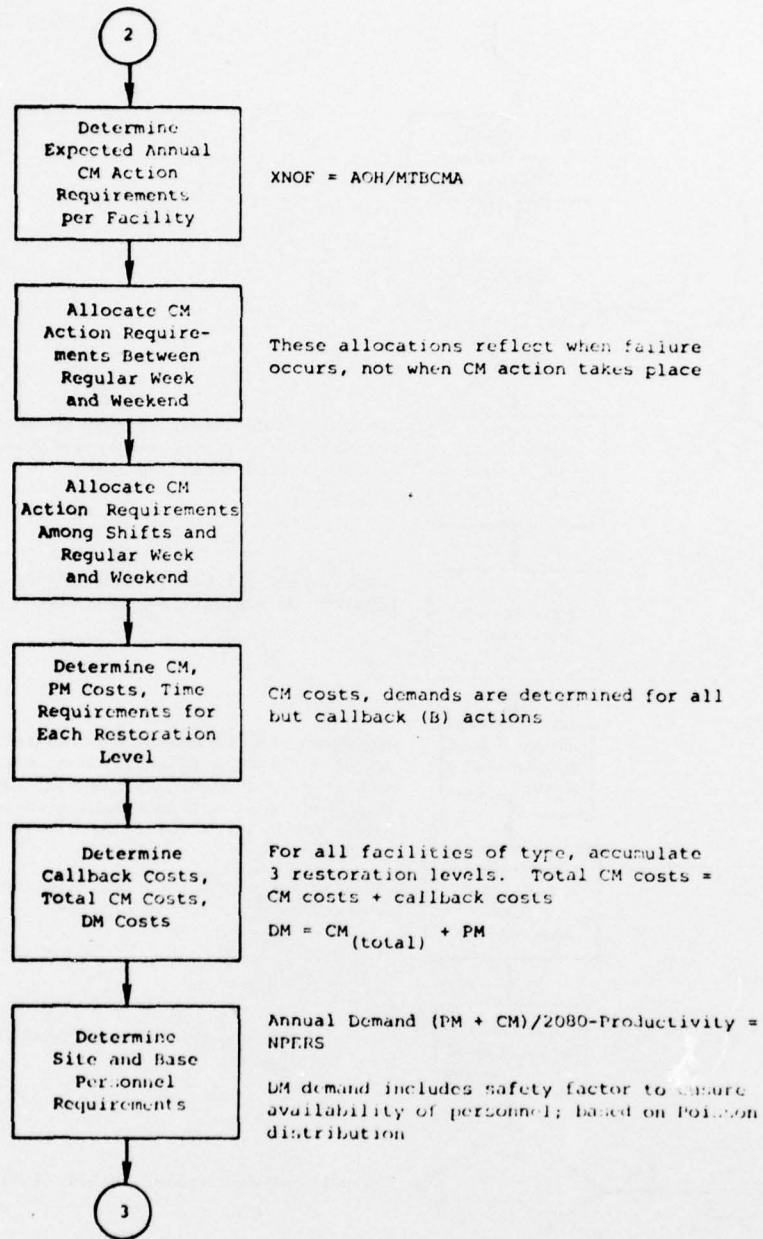


Figure 3-2. FMCM LOGIC (EXPANSION BETWEEN PARTS 2 AND 3)

maintenance (DM), are computed and presented as intermediate output data. After these manpower requirements have been computed separately for each facility type, they are combined to determine the total personnel requirements for the maintenance sector.

The combined man-hour requirements are translated into specific staffing levels for each of the maintenance skill levels defined in the input data. Through this procedure realistic staffing levels are developed wherein personnel of the same skill category may work on several facility types. Having determined the number of maintenance personnel, the model uses a table lookup to determine the number of management/support personnel. Total personnel costs are calculated in the model by summing the product of personnel requirements, in man-hours, and the wage rate over the labor classes required.

At the end of the analysis, total sector maintenance requirements and costs and facility cost allocations are printed. At the option of the analyst, the program can then either terminate or return to the beginning for another program execution.

### 3.2 KEY COST CATEGORIES

The key cost categories that the model considers are defined in the following subsections.

#### 3.2.1 Preventive Maintenance

Preventive maintenance (PM) cost is determined by the maintenance man-hour expenditures required (in accordance with preventive maintenance schedules published in DOT orders applicable to the facilities under evaluation) and travel time. Daily preventive maintenance actions are assumed to require travel times different from those for the longer PM actions, which are assumed to be the same as for a CM action. This is done to reflect facility-to-facility travel for daily PM, rather than travel from the central maintenance location to the facility assumed for the other actions.

Preventive maintenance is assumed to be performed during normal work hours only. It does, however, affect the overall staffing requirements for the facility type and maintenance sector.

#### 3.2.2 Corrective Maintenance

Corrective maintenance (CM) actions are those initiated by failure within a facility. The failure may be catastrophic, caused by a component failure; or it may be one caused by performance degradation below the tolerances specified in DOT orders for facility operations. Either type of failure will normally require replacement of components, modules, or entire systems, depending on the severity of the failure.

The model assumes that all failures are scheduled for immediate repair during normal duty hours and that they preempt preventive maintenance requirements. Corrective action considers the manpower required to restore a facility and includes the transportation time from normal duty station to the failed facility, test and diagnostic setup time, fault-isolation time, time to repair, operational test time, and transportation time to return to normal duty station.

Failures occurring during off-duty hours are scheduled for repair during normal duty hours if the failed system has a restoration level A, or scheduled for repair by call-back personnel if the system has a restoration level B. Call-back repairs are subject to premium overtime rates for labor and include the additional time authorized for transportation between the technician's home and his normal duty station. Level B system failures are repaired the next normal working day if contact with call-back personnel is not established.

Facilities categorized as restoration level C are normally manned 24 hours per day. Therefore, failures of systems in these facilities are treated the same as normal duty system failures except that the labor rates are increased to reflect a shift differential.

### 3.2.3 Direct Maintenance

The direct maintenance (DM) is the sum of the preventive maintenance and the corrective maintenance. This quantity represents the total maintenance labor demand for the facility and/or maintenance sector.

### 3.2.4 Personnel Requirements

The model computes the minimum number of personnel of a given skill category required to perform all expected preventive and corrective maintenance for each facility type. Personnel requirements are determined through the application of productivity factors, which include corrective maintenance and preventive maintenance times (both of which include transportation time) as the baseline (direct labor) and all other labor categories such as training, watch-standing, leave, vacation, etc., as nonproductive activities. The model includes as an output the actual productivity of each labor class, which takes into account the foregoing factors plus any minimum manning constraints (e.g., level C manning requires at least 3 maintenance personnel per day).

The model will permit consideration of an alternative scenario in which some failed items are repaired at an intermediate repair facility, with the site repair activity then becoming simply a remove and replace action. The extent of this option is established within the sector file by the variable RTS (fraction of failures repaired directly at the site). The model automatically determines the number of required intermediate-level personnel and their associated costs based on the input values of RTS for each facility type ( $0 \leq \text{RTS} \leq 1$ ). The model also determines the number of management/support personnel required for the established maintenance personnel based on FAA standards; it determines their costs and includes these costs in the total costs (direct labor and salary) for the sector.

## CHAPTER FOUR

### PROGRAM DESCRIPTION

#### 4.1 OPERATING ENVIRONMENT

The Facilities Maintenance Cost Model (FMCM) program has been developed to run on a time-sharing computer system -- the CDC Kronos system. However, the program is written in FORTRAN and could be utilized on other time-sharing systems but, due to the interactive nature of the program execution, it could not be run in a batch computer environment without some reprogramming.

The program instructions and the input data files should be entered into the time-sharing computer system prior to running the FMCM. Once these files have been set up, the program can be executed after going through the normal log-in procedure for the time-sharing system. The log-in procedure will result in the main program being called into the computer, and the execution of the program will cause the required data files to be accessed.

#### 4.2 PROGRAM SPECIFICATION

The program is written in standard FORTRAN IV. There is no calling sequence or overlay structure.

#### 4.3 SUBPROGRAMS

There are no subprograms.

#### 4.4 SOURCE LISTING

The complete source listing for the Facilities Maintenance Cost Model Program is presented in Figure 4-1. The listing is in FORTRAN coding with the associated line numbers for time-share application. To facilitate understanding of the coding flow, the specific functions performed by the lines or groups of lines of code are summarized in Table 4-1.

#### 4.5 DETAILED FLOW CHARTS

A detailed flow chart of the program is presented in Figure 4-2.

THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM COPY FURNISHED TO DDC

```
00100 PROGRAM SECDCM(INPUT,OUTPUT,TAPE1,TAPE2)
00110 PRINT,♦ AIRWAYS & FACILITIES MAINTENANCE SECTOR COSTS♦
00120 DIMENSION NAMFAC(100),LABOR(6),SLR(6),PSLR(6),DDIF(10),MFER(40),
00130+NSKL(6),PCON(3),NDS(3),NMS(3),NPL(3),PMMH(10),PSF(3),PLF(3)
00140+PE(3),PD(3),MS(3),MES(3),IF(10),NOF(100)
00150+NMINS(6),DLHRS(6)
00160 REAL MTBCMA,MLR,MTRP,MTRF
00170 1 PRINT,///♦ INPUT SECTOR FILE NAME♦,
00180 READ, SECFIL
00190 CALL GET (5HTAPE1,SECFIL,0,0)
00200 CALL GET (5HTAPE2,6HAFACIL,0,0)
00210 READ (1,) LN,L,L,L,L
00220 READ (1,) LN,L,NFT,L,NPL,L,MLR,L,BLR,L,PROBE
00230 DO 2 I=1,NPL $ NSKL(I)=0
00240 NMINS(I)=0 $ DLHRS(I)=0.
00250 2 READ (1,)LN,LABOR(I),L,SLR(I),L,PSLR(I),L,DDIF(I)
00260 READ (2,) LN,L,L,L
00270 READ (1,) LN,L,(MFER(I),I=1,22)
00280 PRINT,♦ DO YOU WANT TO CONSIDER ALL FACILITY TYPES♦,
00290 READ,AA
00300 IF (AA.EQ.3)YES)GOTO 3
00310 PRINT,♦ HOW MANY TYPES♦,
00320 READ,NFT
00330 3 MFER=NOFT=0 $ TMCOST = PCON(1) = 0. $ PCON(3)=1.
00340 COST=COST+COSTT=TRTP=DEMBT=0.
00350 DO 4 I=1,NFT
00360 IF (AA.EQ.3)YES)GOTO 5
00370 PRINT,♦ FACILITY♦,
00380 READ,NAMF
00390 5 READ (1,)LN,NAMFAC(I)
00400 IF (AA.NE.3)YES) GOTO 15
00410 PRINT 100,NAMFAC(I)
00420 100 FORMAT (//♦ FACILITY ? ♦A10)
00430 15 CONTINUE
00440 READ (1,)LN,L,ADH,L,DOH,L,PCON(2),L,PTS,L,PROB,L,NSCAT
00450 READ (1,)LN,L,NPL(J),L,NDS(J),L,NMS(J),J=1,3)
00460 READ (1,)LN,L,TRTP,L,TRT,L,TRTD
00470 IF ((AA.NE.3)YES).AND.(NAMFAC(I).NE.NAMF))GOTO 5
00480 7 READ (2,)LN,LDUM
00490 READ (2,)LN,L,MTBCMA,L,DLF,L,FITT,L,MTRP,L,MTRF,L,BMMH
00500 READ (2,) LN,L,(PMMH(J),J=1,10)
00510 IF (LDUM.NE.NAMFAC(I))GOTO 7
00520 REWIND 2
00530 READ (2,)LN,L,L,L
00540 XNOF=ADH/MTBCMA $ NOF(I)=0
00550 XNOFI=260*DOH/MTBCMA $ XNOFI=XNOF-XNOFI
00560 DO 9 J=1,3 $ MS(J)=MES(J)=1
00570 NOF(I)=NOF(I)+NPL(J)
00580 9 PD(J)=PE(J)=0.
00590 NOFT=NOFT+NOF(I)
00600 EDH=ADH/104-2.5*DOH
00610 IF (DOH.GT.16.)PD(1)=PD(2)=PD(3)=.333
00620 IF (DOH.LE.8.)PD(1)=1.
```

(continued)

Figure 4-1. SOURCE LISTING

THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM COPY FURNISHED TO DDG

```
00630 IF ((DOH.GT.8.).AND.(DOH.LE.16.))PD(1)=PD(2)=.5
00640 IF ((EDH.GT.0.).AND.(EDH.LE.8.))PE(1)=1.
00650 IF (EDH.GT.16.)PE(1)=PE(2)=PE(3)=.333
00660 IF ((EDH.GT.8.).AND.(EDH.LE.16.))PE(1)=PE(2)=.5
00670 DO 11 J=1,3 $ RSF(J)=0.
00680 IF (NDS(J).LE.2)MS(3)=0
00690 IF (NDS(J).EQ.1)MS(2)=0
00700 IF (NMS(J).LE.2)MES(3)=0
00710 IF (NMS(J).LE.1)MES(2)=0
00720 IF (NMS(J).EQ.0)MES(1)=0
00730 DO 12 K=1,3
00740 RSF(K)=NRL(K)*PI(K)*XNOFI*MS(K)+RE(K)*XNOFI*MES(K)+RSF(K)
00750 12 MS(K)=MES(K)=1
00760 11 RLF(J)=XNOFI*NRL(J)-RSF(J)
00770 SMMHP=2*TRTP+FITT+RTS*MTTR+(1-RTS)*MTRP
00780 IF (SMMHP.LT.2.)SMMHP=2.
00790 PDTP=RLF(2)*PCDN(2)*SMMHP*PSLR(NSCAT)
00800 TPOTR=TPOTR+PDTP $ DEMDC=DEMDP=0.
00810 SMMHC=2*TRT+FITT+RTS*MTTR+(1-RTS)*MTRP $ COSC=COSP=0.
00820 DO 14 J=1,10 $ IF (J)=0 $ IF (PMMH(J).NE.0.)IF (J)=1
00830 14 CONTINUE $ YDUM=0.
00840 DO 13 J=1,3 $ YY=1. $ IF (J.EQ.3)YY=SDIF(NSCAT)
00850 DEMD=(RSF(J)+RLF(J)*(1-PCDN(J)))*SMMHC
00860 NC=0
00870 IF (NMS(J).NE.0)NC=1
00880 NS=5*NDS(J)+2*NMS(J)
00890 IF (NMIN(NSCAT).LT. NS)NMIN(NSCAT)=NS
00900 DEMP=NRL(J)*(260+104*NC)*(2*TRTD+PMMH(1))*IF(1)
00910++52*(2*TRT+PMMH(2))*IF(2)+12*(2*TRT+PMMH(3))*IF(3)+4*(2*TRT+PMMH(4))
00920++IF(4)+2*(2*TRT+PMMH(5))*IF(5)+(2*TRT+PMMH(6))*IF(6)+
00930+(780+312*NC)*(2*TRTD+PMMH(7))*IF(7)+(130+52*NC)*(2*TRT
00940++PMMH(8))*IF(8)+104*(2*TRT+PMMH(9))*IF(9)+36*(TRT+2*PMMH(10))*IF(10)
00950 DEMDP=DEMDP+DEMP $ DEMDC=DEMDC+DEMP
00960 DLHRS(NSCAT)=DLHRS(NSCAT)+DEMD+DEMP
00970 COSC=COSC+DEMD*SLR(NSCAT)*YY $ COSP=COSP+DEMP*SLR(NSCAT)*YY
00980 IF (DEMD.EQ.0)NS=1
00990 XDUM=DEMD/NS+SUF*SOFT(DEMD/NS)
01000 13 YDUM=YDUM+NS*XDUM+DEMP
01010 NDUM=INT(YDUM/(2080*PRDD))+.999
01020 NSKL(NSCAT)=NSKL(NSCAT)+NDUM
01030 DEMB=(1-RTS)*SMMH*NOF(1)*XNOFI
01040 MPERB=INT(DEMB/(2080*PRDDE))+.999 $ COSTL=NDUM*2080*SLR(NSCAT)
01050 COSTB=MPERB*2080*BLP
01060 COSC=COSC+PDTP+DEMB*BLP
01070 DEMBT=DEMBT+DEMB $ COST=COSC+COSP
01080 COSCT=COSCT+COSC $ COSPT=COSPT+COSP
01090 COSTT=COSTT+COST
01100 IF (AA.EQ.3)HYE)GOTO 44
01110 REWIND 1
01120 READ (1,)>LN,L,L,L,L
01130 READ (1,)>LN,L,L,L,L,X,X,X,X,X,X
01140 DO 22 J=1,NCL
01150 22 READ (1,)>LN,L,X,X,X,X,X,X,X
01160 READ (1,)>LN,L,(L,J=1,22)
01170 44 CONTINUE
```

(continued)

Figure 4-1. (continued)

THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM COPY FURNISHED TO DDC

```
01180 PRINT 101,COOC,COCP,COST
01190 101 FORMAT(♦ CM COST =♦F10.2♦ PM COST =♦F10.2♦ DM COST =♦F10.2)
01200 PRINT 102,POTP
01210 102 FORMAT(♦ COST OF CALLBACKS =♦F10.2)
01220 PRINT 103,NDUM,LABOR(NOCAT),COSTL
01230 103 FORMAT(I4,♦ OF SITE LABOR CLASS ♦A10,♦ AT ANNUAL BASE COST =♦F10.2)
01240 PRINT 104,MPER,COSTB
01250 104 FORMAT(I4,♦ OF BASE LABOR CLASS AT ANNUAL COST =♦F10.2)
01260 4 CONTINUE
01270 MDUM=MEUM*INT(DEMT/2000*PRODE*+.999)
01280 PRINT,♦♦♦ SUMMARY OF SECTOR VALUES♦
01290 DO 16 I=1,NCL & MNDD=NRIND(I)*S
01300 IF(NKLI(I) .LT. MNDD-NKLI(I)=NRDD
01310 XDUM=2000.*NKLI(I)
01320 IF(XDUM .EQ. 0.)XDUM=1.
01330 DLHR(I)=DLHR(I)/XDUM
01340 16 MDUM=MDUM+NKLI(I)
01350 IF(MDUM .LT. 14)MST=MPER*(MDUM)
01360 DO 517 MM=1,9
01370 MME=10*MM+4 & MNE=10*MM+13
01380 IF(MDUM .GE. MNE).AND.(MDUM .LE. MNE)*(MST=MPER*(13+MM)
01390 517 CONTINUE & COEM=2000*MST*MLP
01400 TMCOST=COSTT+COEM*EDUM=MEUM*2000*ELF
01410 PRINT 101,COOCT,COOPT,COSTT
01420 PRINT 102,TPOTP
01430 TCOCT=COEM*EDUM
01440 DO 17 I=1,NCL
01450 XDUM=NKLI(I)*2000*ELF(I) & TCOIT=TCOCT+XDUM
01460 PRINT 103,NKLI(I),LABOR(I),XDUM
01470 17 PRINT 109,DLHR(I)
01480 109 FORMAT(18,♦ WITH ACTUAL PRODUCTIVITY = ♦F6.4)
01490 PRINT 104,MEUM,EDUM
01500 PRINT 105,MST,COEM
01510 105 FORMAT(I4,♦ OF MST SUPPORT AT ANNUAL COST =♦F10.2)
01520 PRINT 106,TMCOST
01530 106 FORMAT(♦ TOTAL SECTOR ANNUAL LABOR DIRECT COST =♦F10.2)
01540 PRINT 107,TCOCT
01550 107 FORMAT(♦ TOTAL SECTOR ANNUAL LABOR BASE COST =♦F10.2)
01560 PRINT,♦♦♦ ALLOCATED FACILITY TYPE LABOR COST SUMMARY♦
01570 PRINT,♦ FACILITY QUANTITY DIRECT LABOR COST BASE LABOR COST♦
01580 DO 19 I=1,NFT
01590 UCOSD=NOF(I)*TMCOST/NOFT
01600 UCOSB=NOF(I)*TCOCT/NOFT
01610 19 PRINT 108,NAMFAC(I),NOF(I),UCOSD,UCOSB
01620 PRINT,♦♦♦ DO YOU WANT TO RUN ANOTHER CASE♦
01630 READ,AB
01640 108 FORMAT(A10,5%,I4,2F20.2)
01650 IF(AB.NE.3HYE)STOP
01660 REWIND 2
01670 GOTO 1
01680 END
```

Figure 4-1. (continued)

Table 4-1. SUMMARY OF PROGRAM SOURCE LISTING FUNCTIONS

Program Lines	Function
100 - 160	Program, variable type definition and dimensioning
170 - 200	Identifies and calls the sector file (SECFIL) and facilities file (FACFIL)
210 - 220	Reads SECFIL header and general sector data
230 - 240	Initializes variables
250	Reads SECFIL for skill level data
260	Reads FACFIL header
270	Reads SECFIL management data
280 - 320	Identifies number of types of facilities to be evaluated
330 - 340	Initializes variables
350	Begins facility type evaluation loop
360 - 430	Identifies type of facility to be evaluated
440 - 460	Reads SECFIL for facility type data
470 - 510	Reads FACFIL for facility type data
520 - 530	Rewinds FACFIL, reads header
540 - 550	Determines expected failures; allocates them to daily and weekends
560 - 660	Allocates daily/weekend failures to specific shifts
670 - 720	Determines daily and weekend maintenance shift factors
730 - 750	Determines regular shift maintenance action demands
760	Determines non-regular shift maintenance action demands
770 - 800	Determines call back demand and cost
810	Determines regular shift corrective maintenance time/action
820 - 830	Initializes variables
840 - 850	Determines regular shift corrective maintenance demand
860 - 890	Establishes if minimum CM coverage demands are satisfied
900 - 950	Determines PM and total maintenance demand
960	Accumulates maintenance hours for skill level required
970	Determines corrective and preventive maintenance cost
980 - 1020	Determines number of maintenance personnel required for facility type
1030 - 1050	Determines demand, cost, and number of intermediate level maintenance personnel required for facility type
1060 - 1090	Determines cost totals for facility type
1100 - 1170	Checks end of SECFIL file, rewinds SECFIL, reads header/common data
1180 - 1250	Outputs facility data
1260	Ends facility loop
1270	Accumulates intermediate level personnel
1280	Outputs summary header
1290 - 1340	Determines sector salary totals by skill level
1350 - 1390	Determines number and salary cost of management/support personnel
1400 - 1550	Outputs sector summary data
1560 - 1600	Allocates and outputs facility costs by type
1610 - 1680	Determines if additional cases are to be run or program stopped



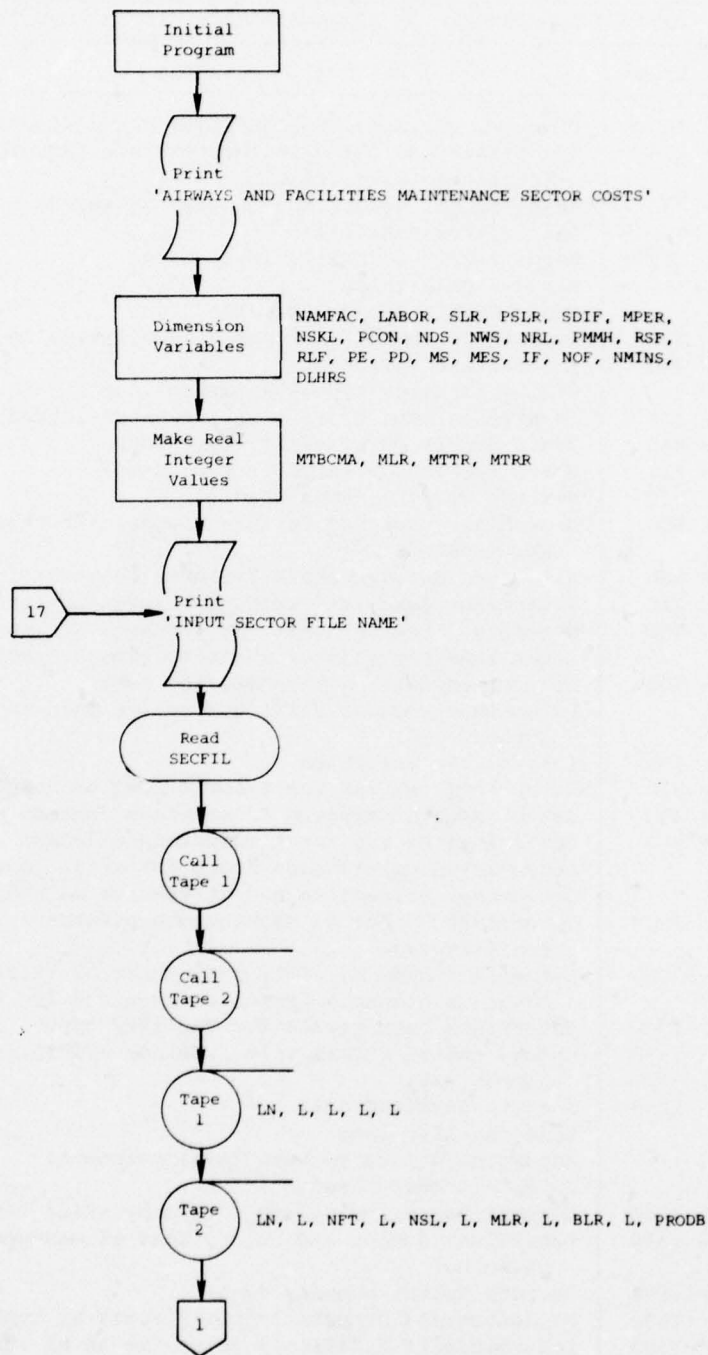


Figure 4-2. DETAILED FLOW CHART  
(continued on pages 4-7 through 4-18)

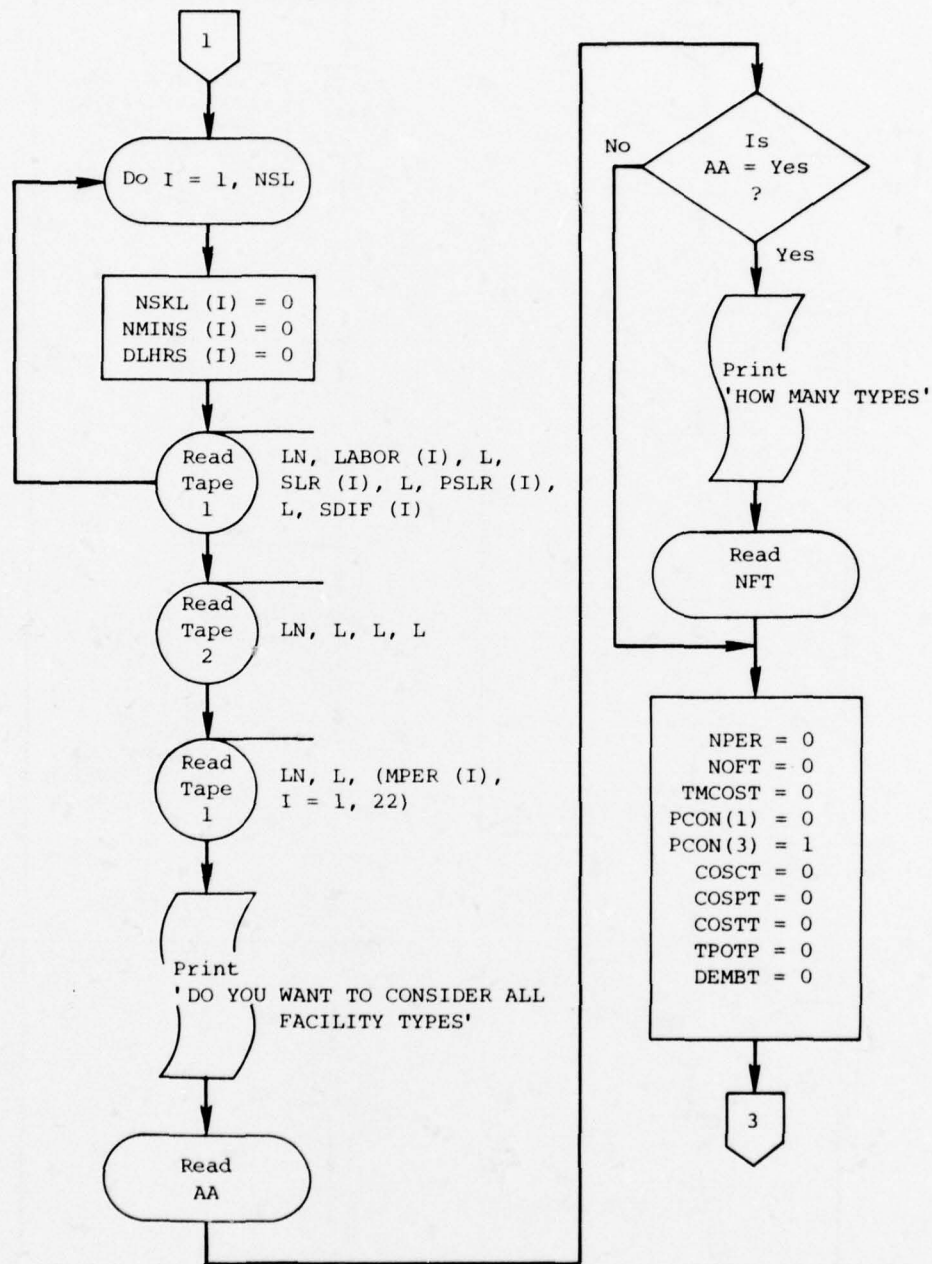


Figure 4-2. (continued)

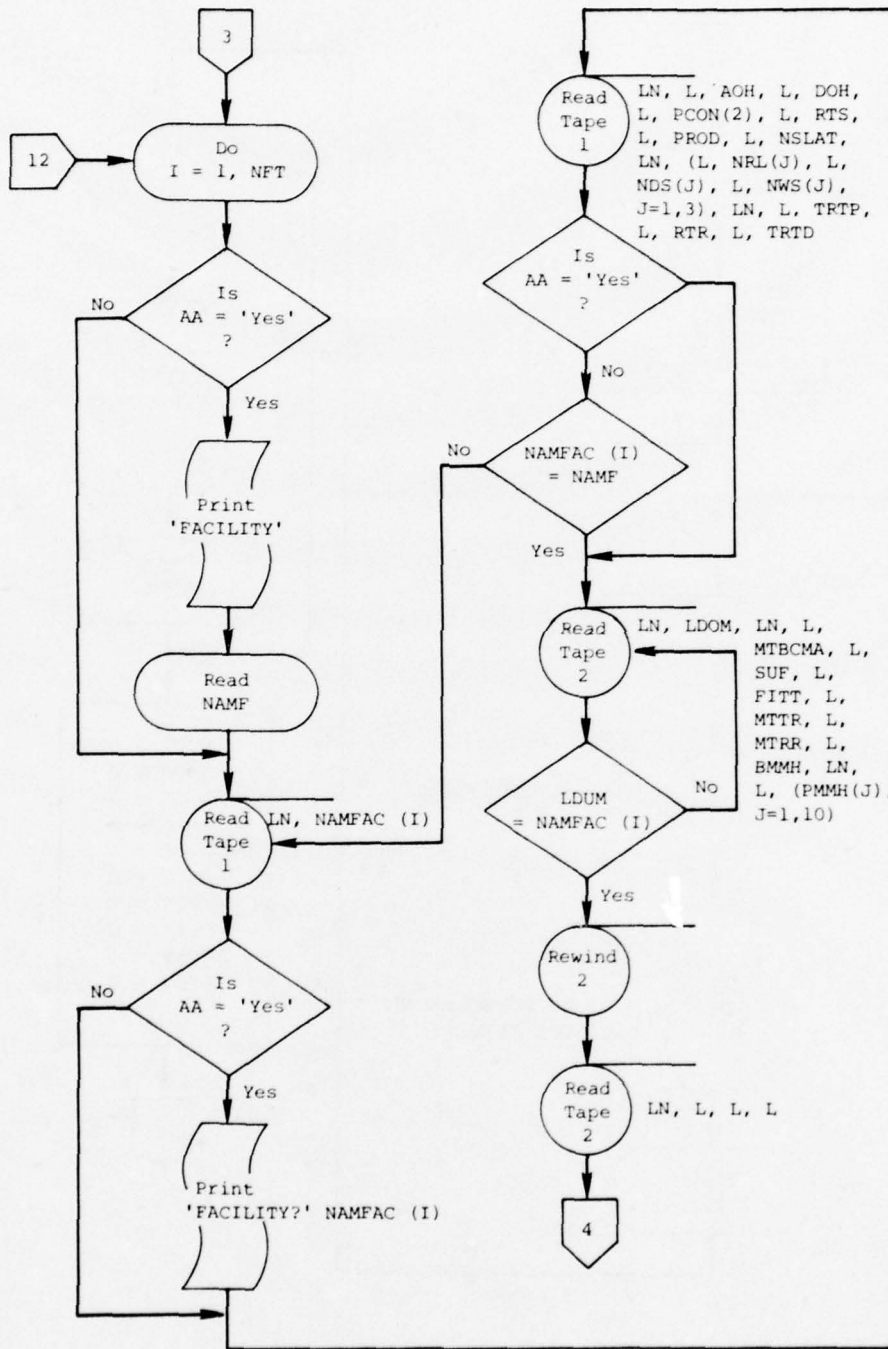


Figure 4-2. (continued)

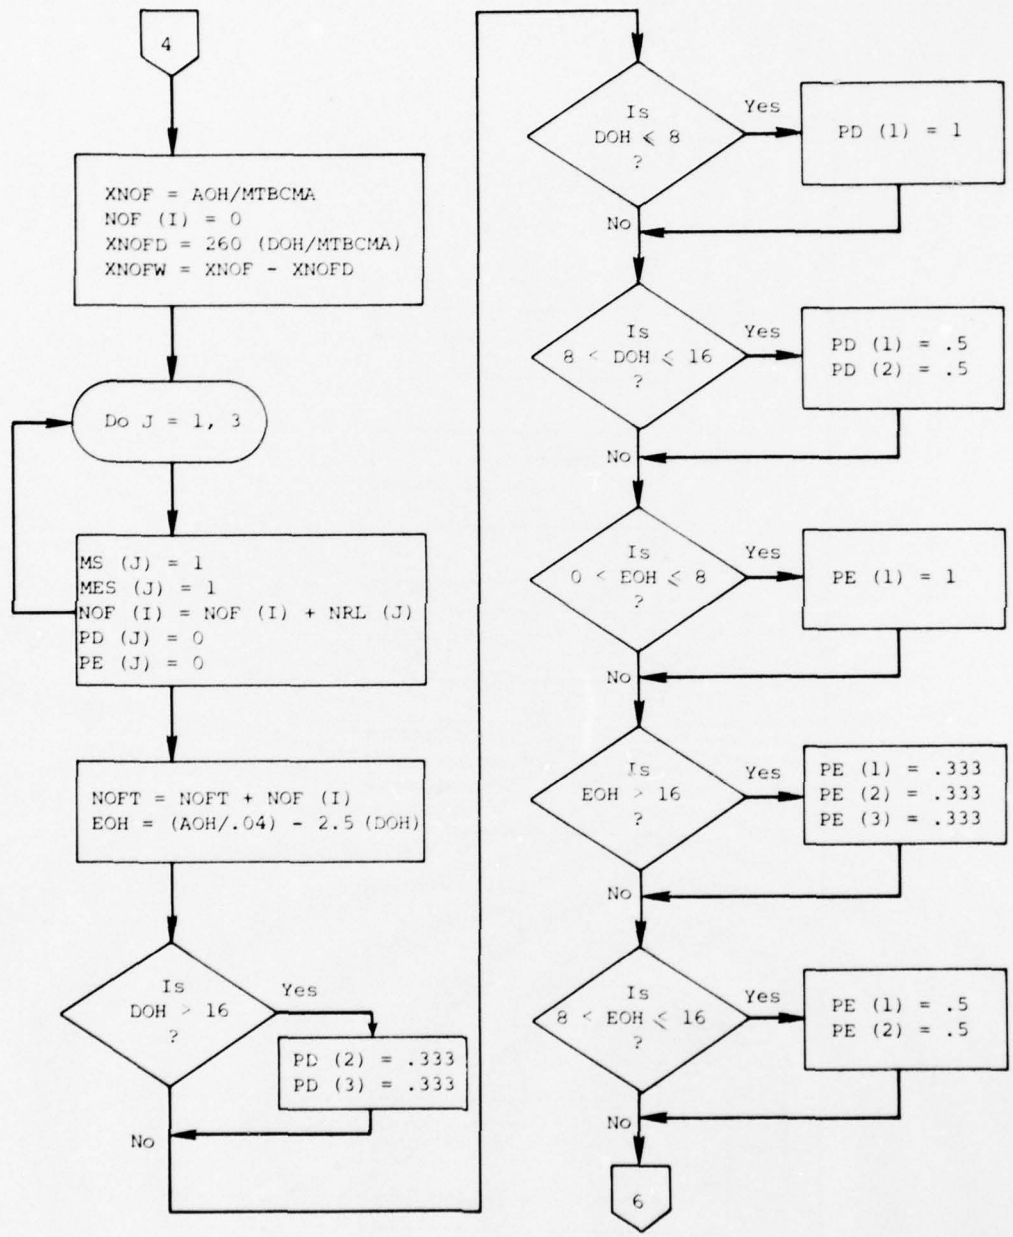


Figure 4-2. (continued)

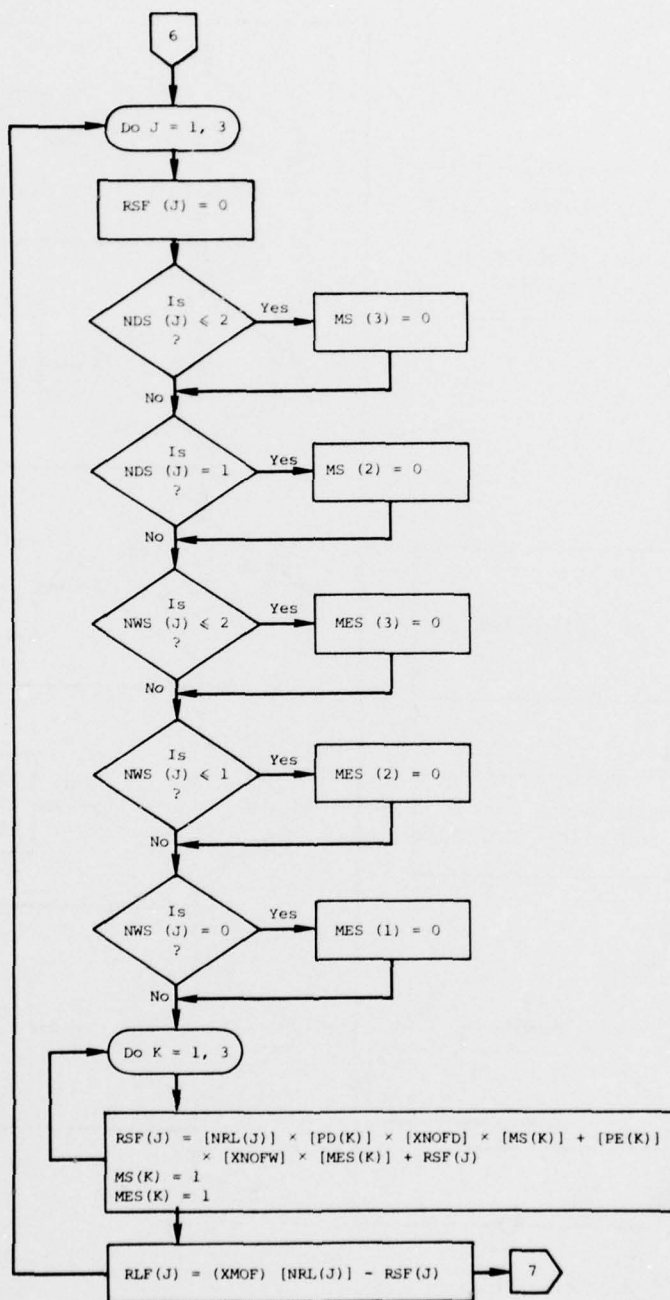


Figure 4-2. (continued)

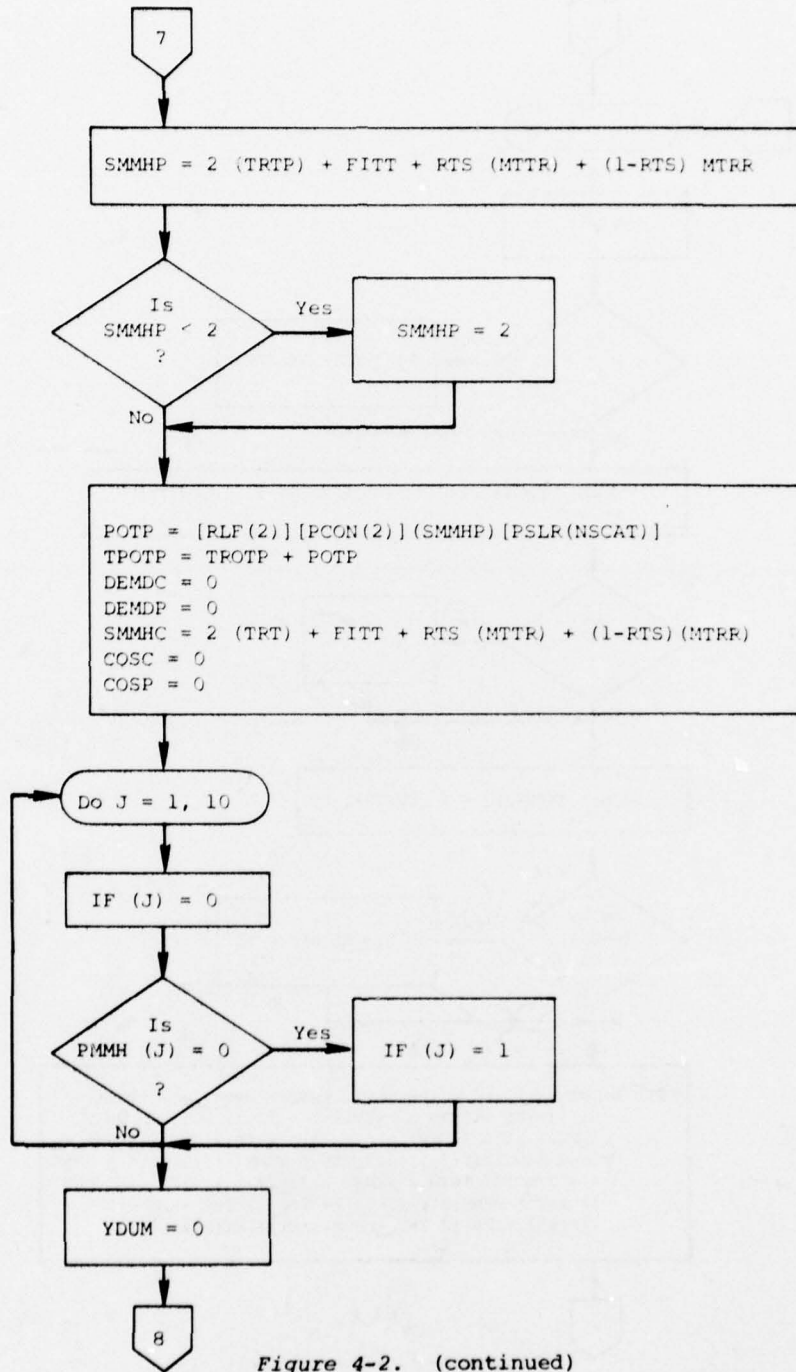


Figure 4-2. (continued)

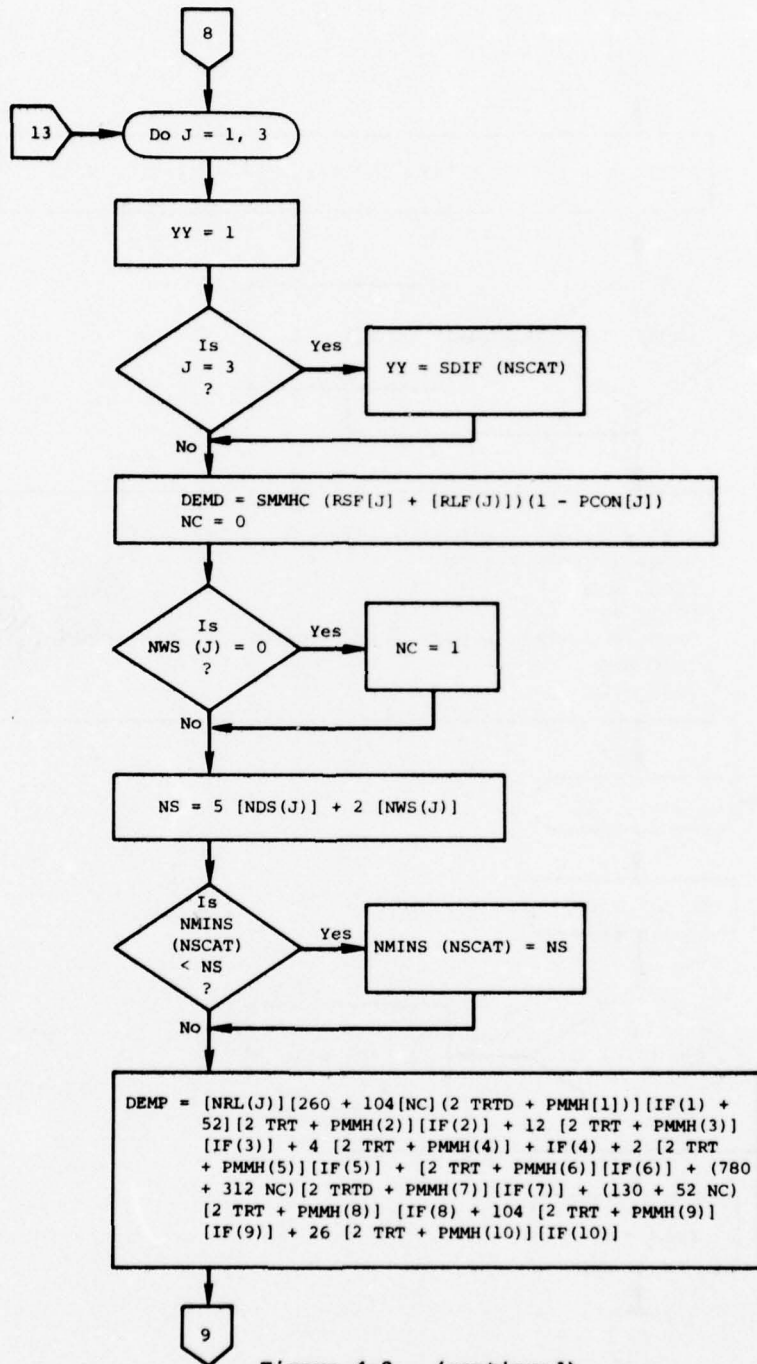


Figure 4-2. (continued)

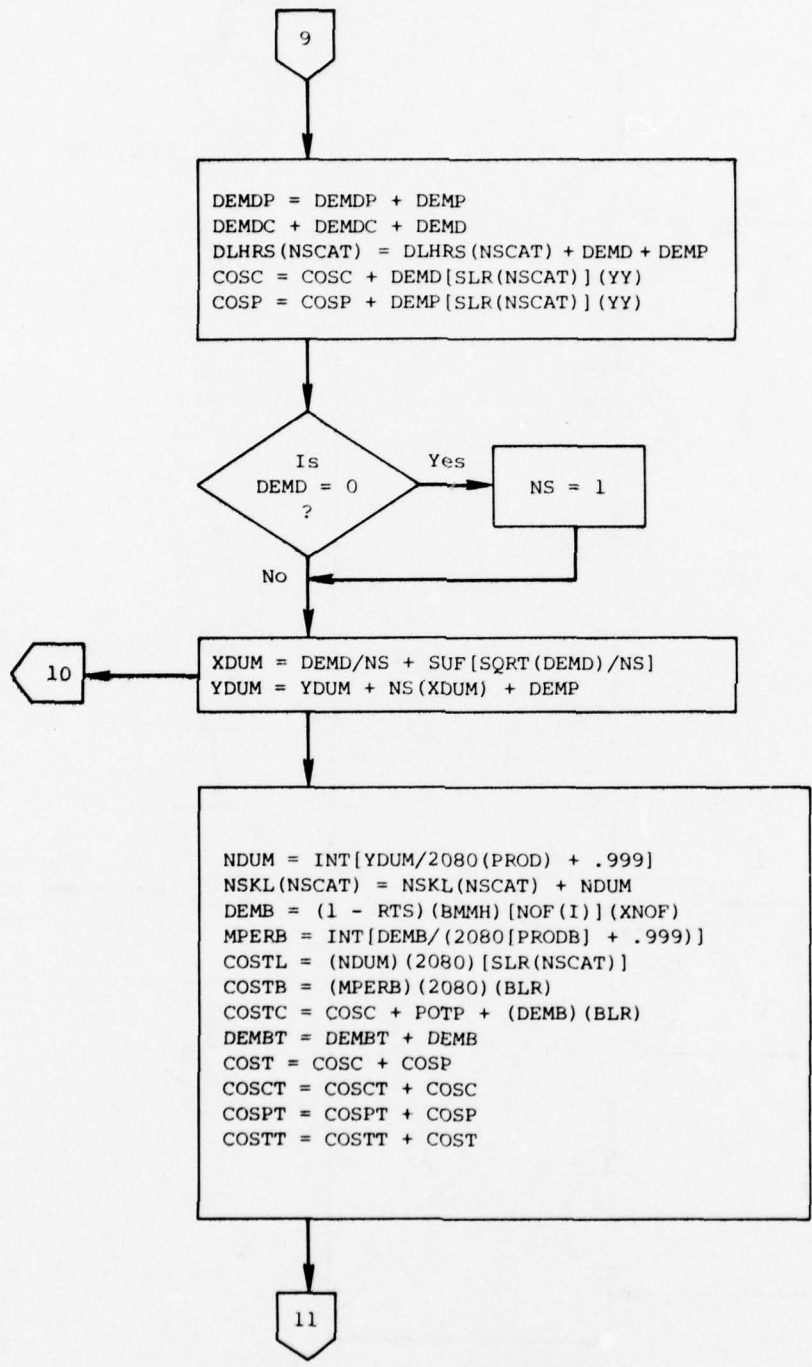


Figure 4-2. (continued)



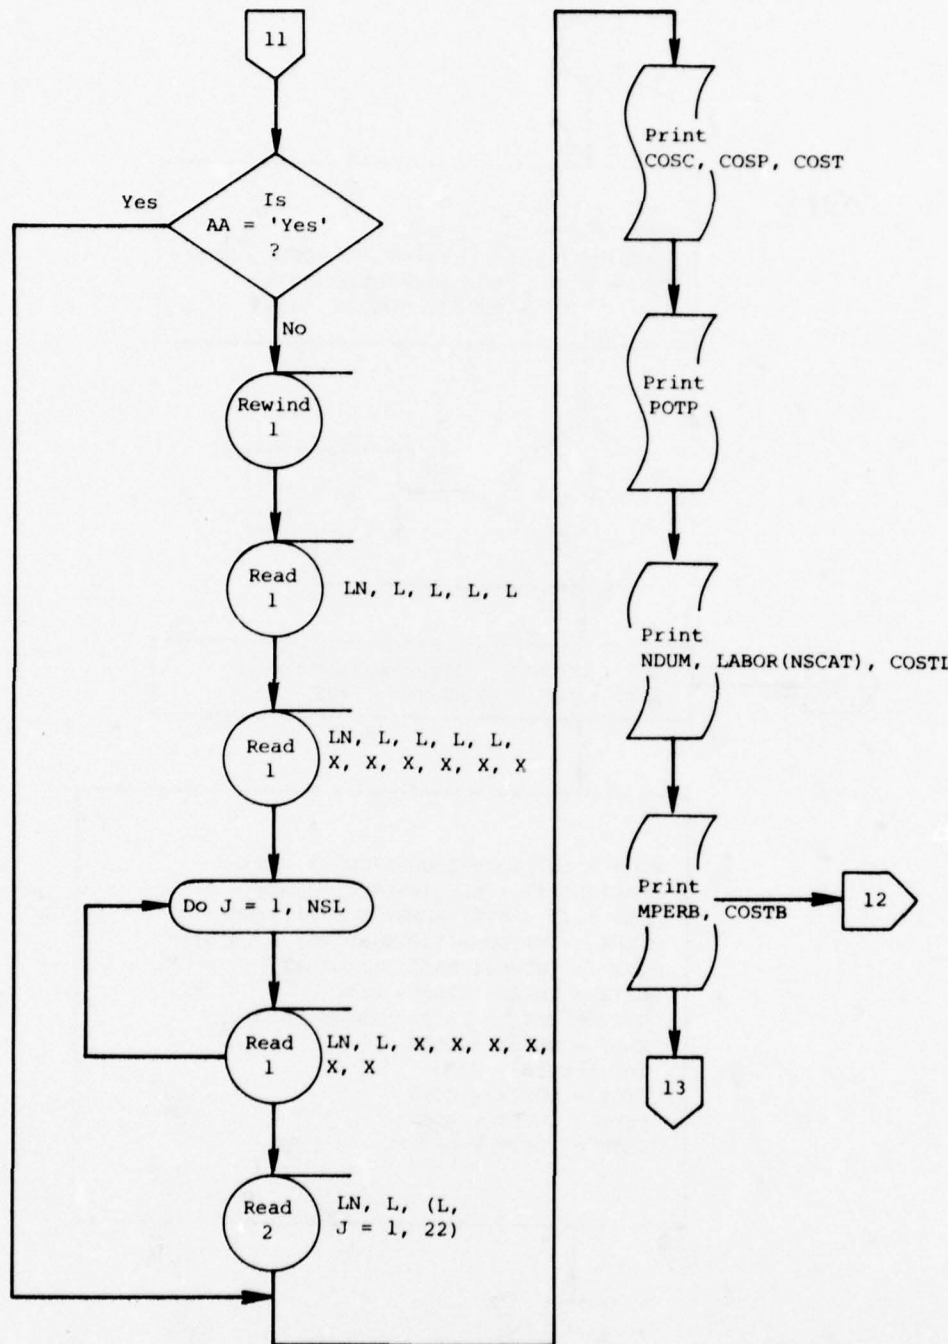


Figure 4-2. (continued)

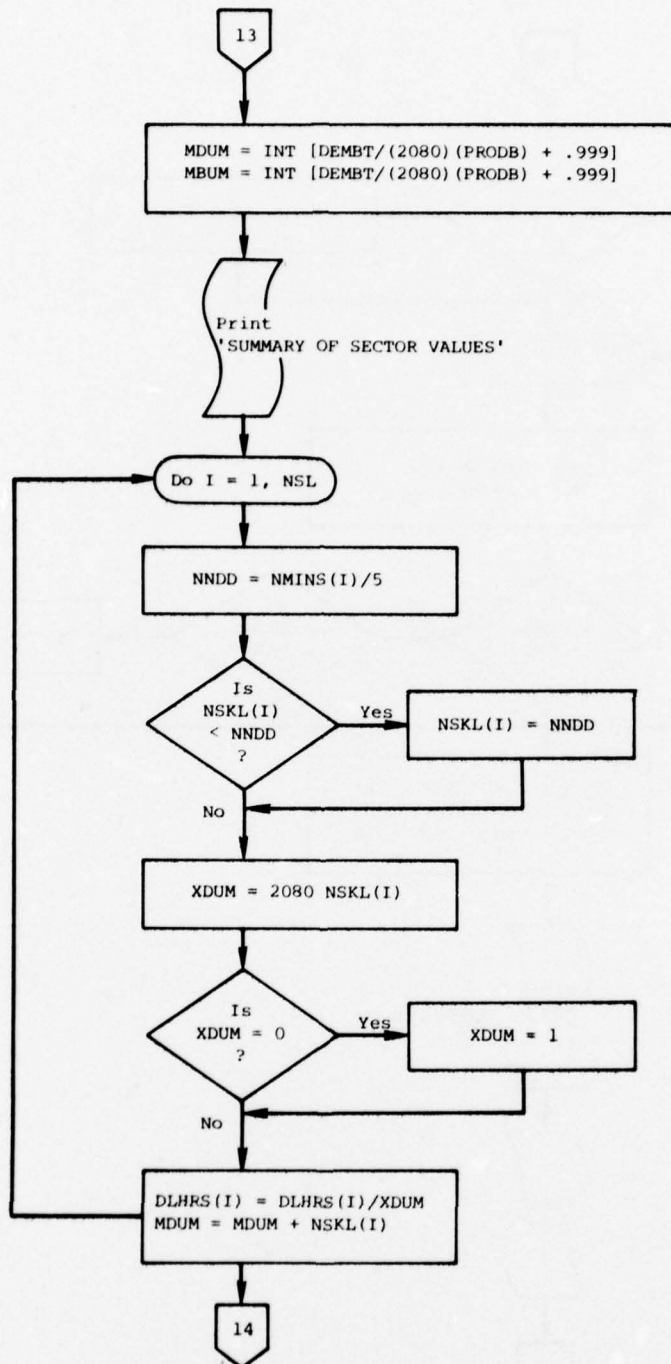


Figure 4-2. (continued)

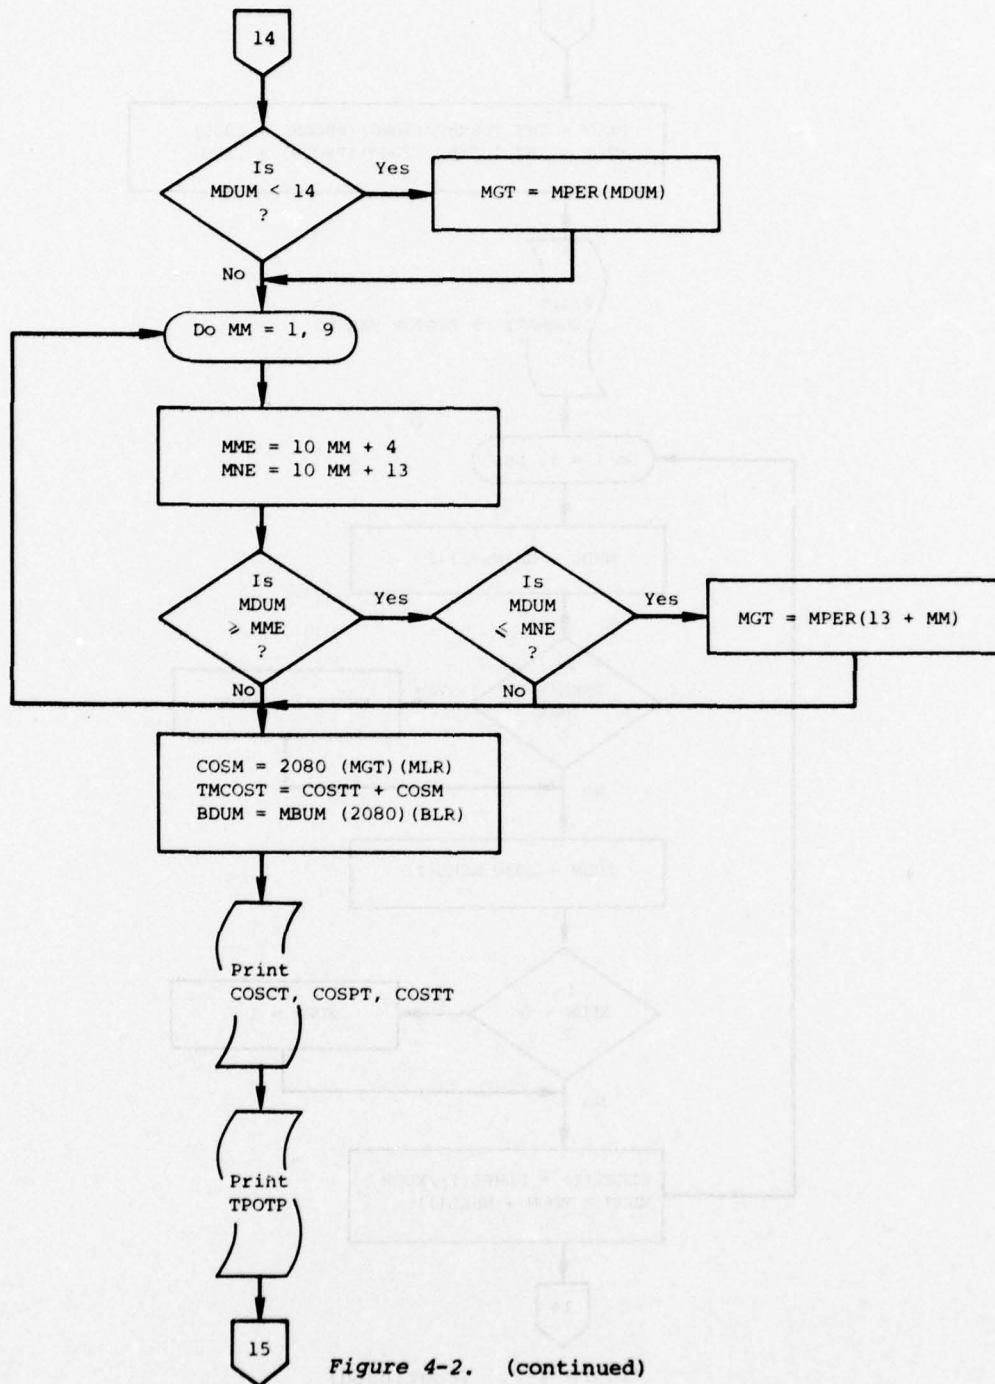


Figure 4-2. (continued)

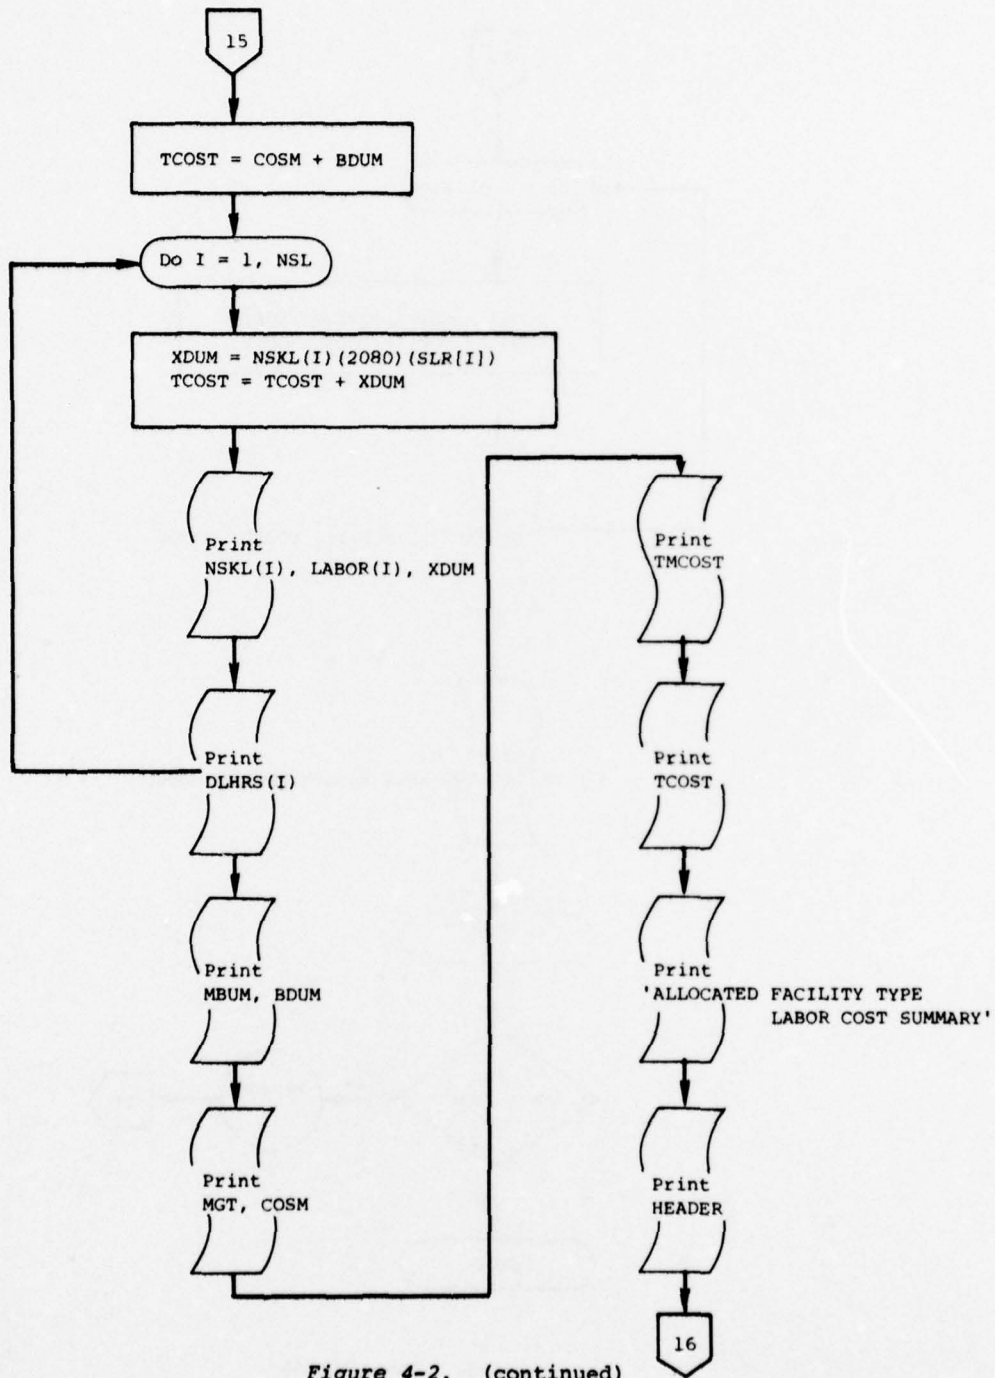


Figure 4-2. (continued)

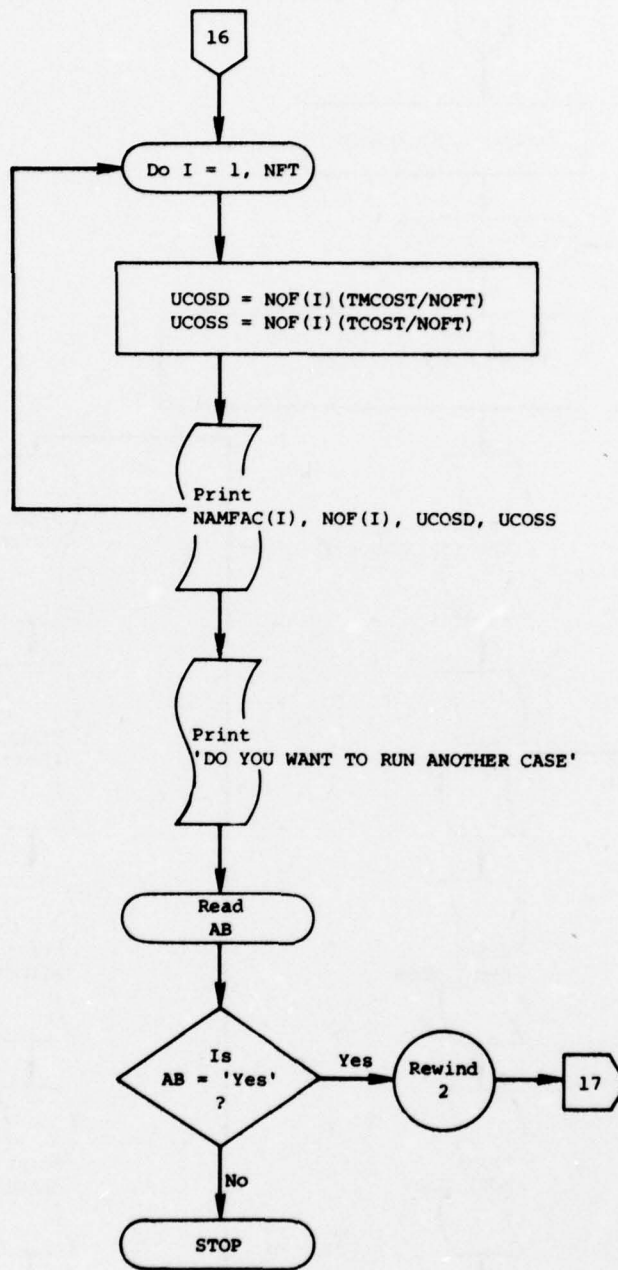


Figure 4-2. (continued)

## CHAPTER FIVE

### PROGRAM USE

#### 5.1 TAPE SETUP

The program is contained in a standard magnetic tape cassette and is read into the time-share computer from a remote terminal by whatever procedures are appropriate to the terminal. Input files are read-in separately in accordance with the format described below.

#### 5.2 INPUT DATA

Descriptions of the sector and facilities file data elements are given in Tables 5-1 and 5-2, respectively. The program considers as many sectors as there are sector files provided as data input. The number of facilities per sector is variable and is controlled solely by the program dimensioning statement.

The FMCM was exercised for the Logan maintenance sector by use of the input file data shown in Tables 5-3 and 5-4. Figures 5-1 and 5-2 present these same data in their input format. In Figure 5-1, the Logan Sector Data File, Lines 20 through 70 are personnel data inputs, and from Line 80 onward the data pertain to sector facilities. Line 20 in Figure 5-2 identifies the first set of data as that associated with the Glide Slope transmitter, here abbreviated GS. Lines 30 and 40 contain the data for the variables identified. Note that PMMH in Line 40 is a vector. In the remaining lines of the file the parameter names are further abbreviated to single letters. For example, in Line 60 "M 170" appears. This means the MTBCMA for the localizer is 170 hours.

#### 5.3 MODEL OUTPUTS

Figures 5-3 through 5-5 are reproductions of outputs of model runs performed during the demonstration of the model. Figure 5-3 shows a run in which all facility types in the Logan sector are evaluated. The figure is truncated to show only the outputs associated with the first five facility types, out of a total of fourteen.

Table 5-1. SECTOR DATA FILE (SECFIL)		
Mnemonic	Description	
NFT	Number of facilities in the sector data file	
NSL	Number of skill levels available within the sector	
MLR	Average management support labor rate (dollars per hour)	
BLR	Intermediate maintenance shop labor rate (dollars per hour)	
PRODB	Intermediate maintenance shop labor productivity ratio	
①	XXX	Mnemonic for maintenance skill level
	SLR	Labor rate (dollars per hour, defined for each skill level)
	PSLR	Overtime labor rate (dollars per hour, defined for each skill level)
	SDIF	Shift differential (a factor defined for each skill level)
	MPER	Management support requirements as a function of maintenance staff size
②	XXX	Mnemonic for a facility type within the sector
	AOH	Average annual facility operating hours (hours per year)
	DOH	Average daily facility operating hours (hours per day)
	PCONB	Probability of contacting a maintenance man for a restoration level B facility
	KTS	Fraction of failures repaired directly at the site
	PROD	Average maintenance man productivity
	NSCAT	Maintenance skill level identifier (see Note 1)
	NRLA/NRLB/NRLC	Number of facilities having restoration levels A, B, or C
	NDSA/NDSB/NDSC	Number of daily shifts for facilities having restoration levels A, B, or C
	NWSA/NWSB/NWSC	Number of weekend shifts for facilities having restoration levels A, B, or C
	TRTP	Average authorized travel time to one of these facilities for a call-back (hours)
TRT	Average travel time to one of these facilities from the central location (hours)	
TRTD	Average travel time to one of these facilities for daily PM (hours)	
Notes: 1. These parameters are repeated for each skill level available within the sector.		
2. These parameters are repeated for each facility type within the sector.		

Table 5-2. FMCM FACILITIES DATA FILE FOR EACH FACILITY TYPE (FACFIL)	
Mnemonic Code*	Description
Alphanumeric	Alphanumeric identifier for facility type (e.g., GS, ASR, LOM)
MTBCMA	Mean time between corrective maintenance actions (operating hours per failure)
SUF	Personnel sufficiency factor (nondimensional factor to provide safety margin in determining personnel requirements)
FITT	Average fault-isolation and test time (maintenance man-hours per action)
MTTR	Mean time to repair (maintenance man-hours per action)
MTRR	Mean time to remove and replace (maintenance man-hours per action)
BMUI	Average intermediate-level repair time (maintenance man-hours per action)
PMMI	Preventive maintenance time (maintenance man-hours per action)**
*These parameters are repeated for each facility type within the sector.	
**This parameter is an array of preventive maintenance times, by facility type, for each of the following scheduled PM frequencies: daily, weekly, monthly, quarterly, semi-annually, annually, three times daily, every other day, twice a week, every other week.	

Table 5-3. SECTOR DATA FILE (SECFIL)																					
Mnemonic	Sector Parameters																				
NFT	14																				
NSL	4																				
MLR	18																				
BLR	0																				
PRODB	.7																				
Mnemonic	Skill-Level Parameters																				
	RAD				ART				NAV				ENV								
SLR	12				12				12				12								
PSLR	18				18				18				10.9								
SDLF	1.25				1.25				1.25				1.25								
MPER*	0	0	0	0	3	4	5	8	9	10	11	12	13	15	17	19	21	23	27	29	31
Mnemonic	Facility Parameters																				
	ASR	ARSR	SECRA	CD	RMLT	ARTS-3	ALS	GS	LOC	LOM	MM	H	VOR	TACAN							
AOH	8760	8760	8760	8760	8760	8760	4380	8760	8760	8760	8760	8760	8760	8760							
DDH	24	24	24	24	24	24	12	24	24	24	24	24	24	24							
PONB	0	0	0	0	0	0	0	.95	.95	.95	.95	0	0	0							
RTS	1	1	1	1	1	1	1	1	1	1	1	1	1	1							
PROD	.6	.6	.6	.6	.6	.6	.6	.6	.6	.6	.6	.6	.6	.6							
NSCAT	1	1	1	1	1	2	4	3	3	3	3	3	3	3							
NRLA	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
NDSA	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
NWSA	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
NRLB	0	0	0	0	0	0	2	1	2	1	1	0	0	0							
NDSB	0	0	0	0	0	0	2	1	1	1	1	0	0	0							
NWSB	0	0	0	0	0	0	2	1	1	1	1	0	0	0							
NRLC	1	1	2	1	2	1	0	3	3	3	3	1	1	1							
NDSC	3	3	3	3	3	3	0	3	3	3	3	3	3	3							
NWSC	3	3	3	3	3	3	0	3	3	3	3	3	3	3							
TRTP	0	0	0	0	0	0	0	2	2	2	2	0	0	0							
TRT	.3	0	.3	0	0	0	.25	.25	.3	1	1	.3	.25	.25							
TRTD	.3	0	.3	0	0	0	0	.25	.3	0	0	0	0	0							

\*Applies to composite of all skill levels.



Table 5-4. FACILITIES INPUT FILE (FACFIL)

Parameter	Facility													
	GS	LOC	LOM	MM	H	VOR	TACAN	ASR	ARSR	SECRA	OD	ARTS-3	ALS	RMLT
MTBCMA	8760	170	8760	8760	35,000	340	500	550	730	738	8760	8760	365	180
SUF	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FITT	6	.1	.7	.7	10	.25	.5	.5	1.5	.5	.6	8	.5	.5
MTRR	2	.3	.3	.3	.3	12	.5	1	.5	1	.2	2	2	2
MTRR	0	0	0	0	0	0	0	0	0	0	0	0	0	0
BMMH	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	3	2	3	1	2	8	0	0
	1	3	0	0	0	1	4	6	3	6	2.5	7	7	2
	4	4	.25	.25	0	6	8	15	8	15	7	18	4	9
	4	4	1	1	0	5	0	8	10	0	14	25	0	40
	1	16	0	0	0	1	0	15	6	6	16	7	10	2
	1	2	1	1	.25	0	2	26	2	0	4	1	400	2
	.25	0	0	0	0	0	0	0	0	0	0	0	0	0
	0	.25	0	0	0	0	0	0	0	0	0	0	0	0
	.5	.5	0	0	0	0	0	0	0	0	0	0	0	0
	0	0	1	1	1	0	0	0	0	0	0	0	0	0



THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM COPY FURNISHED TO DDC

10 FACILITIES DATA FILE  
20 63  
30 MTKM9 8760. SUS 0. FTT 6. MTR 2. MTRR 0. BMM 0.  
40 PMMH 0. 1. 4. 4. 1. 1. .25 0. .5 0.  
50 LDC  
60 M 170. S 0. F .1 M .3 M 0. E 0.  
70 P 0. 2. 4. 4. 16. 2. 0. .25 .5 0.  
80 LDM  
90 M 8760. S 0. F .7 M .3 M 0. E 0.  
100 P 0. 0. .25 1. 0. 1. 0. 0. 0. 1.  
110 MM  
120 M 8760. S 0. F .7 M .3 M 0. E 0.  
130 P 0. 0. .25 1. 0. 1. 0. 0. 0. 1.  
140 M  
150 M 25000. S 0. F 10. M .3 M 0. E 0.  
160 P 0. 0. 0. 0. 0. .25 0. 0. 0. 1.  
170 VDP  
180 M 340. S 0. F .25 M 12. M 0. E 0.  
190 P 0. 1. 6. 5. 1. 0. 0. 0. 0. 0.  
200 TACAN  
210 M 500. S 0. F .5 M .5 M 0. E 0.  
220 P 3. 4. 8. 0. 0. 2. 0. 0. 0. 0.  
230 RSP  
240 M 550. S 0. F .5 M .5 M 0. E 0.  
250 P 2. 6. 15. 8. 15. 26. 0. 0. 0. 0.  
260 RSP  
270 M 730. S 0. F 1.5 M .5 M 0. E 0.  
280 P 3. 3. 3. 10. 6. 2. 0. 0. 0. 0.  
290 SECP  
300 M 730. S 0. F .5 M 1. M 0. E 0.  
310 P 1. 6. 15. 0. 6. 0. 0. 0. 0. 0.  
320 CD  
330 M 8760. S 0. F 16. M .2 M 0. E 0.  
340 P 2. 2.5 7. 14. 16. 4. 0. 0. 0. 0.  
350 RTD  
360 M 8760. S 0. F 8. M 2. M 0. E 0.  
370 P 2. 7. 18. 25. 7. 1. 0. 0. 0. 0.  
380 HUS  
390 M 365. S 0. F .5 M 2. M 0. E 0.  
400 P 0. 7. 4. 0. 10. 400. 0. 0. 0. 0.  
410 PML  
420 M 180. S 0. F .5 M 2. M 0. E 0.  
430 P 0. 2. 9. 40. 2. 2. 0. 0. 0. 0.

Figure 5-2. FACILITY FILE

**THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM COPY FURNISHED TO DDC**

**AIRPORT - FACILITIES MAINTENANCE SECTOR COST**

INPUT SECTOR FILE NAME : L0999  
DO YOU WANT TO CONSIDER ALL FACILITY TYPES : YES

FACILITY : RFR  
ON COST = 501.81 PM COST = 23525.00 DM COST = 24030.81  
COST OF CHALLENGE = 0.  
3 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 49920.00  
0 OF RATE LABOR CLASS AT ANNUAL COST = 0.

FACILITY : RFR  
ON COST = 354.44 PM COST = 20370.00 DM COST = 21229.84  
COST OF CHALLENGE = 0.  
3 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 49920.00  
0 OF RATE LABOR CLASS AT ANNUAL COST = 0.

FACILITY : DECFA  
ON COST = 250.24 PM COST = 30780.00 DM COST = 3455.84  
COST OF CHALLENGE = 0.  
3 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 49920.00  
0 OF RATE LABOR CLASS AT ANNUAL COST = 0.

FACILITY : CD  
ON COST = 240.76 PM COST = 15510.00 DM COST = 15752.76  
COST OF CHALLENGE = 0.  
1 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 24960.00  
0 OF RATE LABOR CLASS AT ANNUAL COST = 0.

FACILITY : FMT  
ON COST = 3246.35 PM COST = 11240.00 DM COST = 14986.35  
COST OF CHALLENGE = 0.  
1 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 24960.00  
0 OF RATE LABOR CLASS AT ANNUAL COST = 0.

Figure 5-3. FMCM OUTPUT (PART A)

SUMMARY OF SECTOR VALUES  
ON COST = 30424.41 PM COST = 207597.05 DM COST = 258031.44  
COST OF CHALLENGE = 5492.84  
3 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 19920.00  
WITH ACTUAL PRODUCTIVITY = 1.433  
4 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 9940.00  
WITH ACTUAL PRODUCTIVITY = 1.437  
14 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 34940.00  
WITH ACTUAL PRODUCTIVITY = 1.4129  
2 OF SITE LABOR CLASS RFR AT ANNUAL RATE COST = 29120.00  
WITH ACTUAL PRODUCTIVITY = 1.4334  
0 OF RATE LABOR CLASS AT ANNUAL COST = 0.  
17 OF RST SUPPORT AT ANNUAL COST = 48480.00  
TOTAL SECTOR ANNUAL LABOR DIRECT COST = 759341.48  
TOTAL SECTOR ANNUAL LABOR RATE COST = 1109400.00

ALLOCATED FACILITY TYPE LABOR COST SUMMARY			
FACILITY	QUANTITY	DIRECT LABOR COST	RATE LABOR COST
RFR	1	26078.05	36746.67
RFR	1	26078.05	36746.67
DECFA	2	52156.10	73493.33
CD	1	26078.05	36746.67
FMT	2	52156.10	73493.33
RPT3	1	26078.05	36746.67
RFC	2	52156.10	73493.33
GC	4	104312.19	146986.67
LOC	5	130390.24	183733.33
LOM	4	104312.19	146986.67
MM	4	104312.19	146986.67
H	1	26078.05	36746.67
YOM	1	26078.05	36746.67
TRHM	1	26078.05	36746.67

DO YOU WANT TO RUN ANOTHER CASE: YES

Figure 5-4. FMCM OUTPUT (PART B)

**THIS PAGE IS BEST QUALITY PRACTICABLE  
FROM COPY FURNISHED TO DDG**

```

INPUT SECTOR FILE NAME ? LOGAN
DO YOU WANT TO CONSIDER ALL FACILITY TYPES ? NO
HOW MANY TYPES ? 2
FACILITY ? ASR
CM COST = 501.81 PM COST = 23535.00 DM COST = 24036.81
COST OF CALLBACKS = 0.
2 OF SITE LABOR CLASS RAD AT ANNUAL BASE COST = 49920.00
0 OF BASE LABOR CLASS AT ANNUAL COST = 0.
FACILITY ? TACAN
CM COST = 393.81 PM COST = 48757.50 DM COST = 49151.31
COST OF CALLBACKS = 0.
3 OF SITE LABOR CLASS NAV AT ANNUAL BASE COST = 74880.00
0 OF BASE LABOR CLASS AT ANNUAL COST = 0.

```

```

SUMMARY OF SECTOR VALUES
CM COST = 895.61 PM COST = 72292.50 DM COST = 73187.51
COST OF CALLBACKS = 0.
4 OF SITE LABOR CLASS RAD AT ANNUAL BASE COST = 99840.00
WITH ACTUAL PRODUCTIVITY = .1899
0 OF SITE LABOR CLASS ART AT ANNUAL BASE COST = 0.
WITH ACTUAL PRODUCTIVITY = 0.
4 OF SITE LABOR CLASS NAV AT ANNUAL BASE COST = 99840.00
WITH ACTUAL PRODUCTIVITY = .3939
0 OF SITE LABOR CLASS EMV AT ANNUAL BASE COST = 0.
WITH ACTUAL PRODUCTIVITY = 0.
0 OF BASE LABOR CLASS AT ANNUAL COST = 0.
8 OF MST SUPPORT AT ANNUAL COST = 199680.00
TOTAL SECTOR ANNUAL LABOR DIRECT COST = 878867.51
TOTAL SECTOR ANNUAL LABOR BASE COST = 399360.00

```

```

ALLOCATED FACILITY TYPE LABOR COST SUMMARY
FACILITY QUANTITY DIRECT LABOR COST BASE LABOR COST
ASR 1 136433.75 199680.00
TACAN 1 136433.75 199680.00

```

DO YOU WANT TO RUN ANOTHER CASE? NO

Figure 5-5. FMCM OUTPUT (PART C)

The first output block of Figure 5-3, for the ASR, shows corrective, preventive, and direct maintenance costs per year. It can be seen that direct maintenance cost is the sum of the costs of corrective and preventive maintenance. Since the ASR is subject to level C maintenance, there are no call-back costs. Two men in labor category RAD were considered in the calculation, at combined annual salaries of \$49,920. Since only on-site repair is conducted at Logan, the base (intermediate) labor category is null; therefore, the cost is zero. Base repair is in the model as a logistic-support scenario option. After the ASR cost data are printed, the next facility to be evaluated, "ARSR", is identified. This cycle continues until all facilities in the sector file have been examined.

Figure 5-4 shows the summary output for the entire sector. It gives the total corrective, preventive, and direct maintenance costs for 14 facility types and, for those facilities which are restoration level B, the total cost of call-backs. The total basic salaries of the four labor classes are displayed, as well as their expected actual productivities. Productivity is defined as the ratio of actual maintenance time to total on-duty time.

The item denoted "total sector annual direct cost" is the sum of the direct maintenance cost and management/support cost. The item denoted "total sector annual labor base cost" is the sum of the annual base (salary) costs of four labor classes and management/support cost. It is assumed that management/support personnel productivity is unity.

The table in the lower portion of Figure 5-4 is a summary of allocated labor costs for the entire set of facilities. The basis for the allocation in this case is that the 30 facilities have equal weight. It is possible, of course, to allocate these costs by another weighting system.

Figure 5-5 displays the same kinds of data as Figures 5-3 and 5-4. The only difference is that in this run only two facilities have been selected (a program option): the ASR and TACAN, which must be identified by terminal inputs before each is evaluated.

#### 5.4 RESTRICTIONS AND/OR LIMITATIONS

There are no hardware or software restrictions. Restrictions on data ranges or capacities are not anticipated.

#### 5.5 EDITING AND DIAGNOSTICS

There are no program-generated diagnostic messages.

#### 5.6 TEST CASE

The input and output data files presented in Section 5.3 were obtained from the program demonstration. These files, when considered with the program listing, constitute a test case.

#### 5.7 APPLICATION OF THE FMCM

The model, as noted earlier, is structured to have a common file (FACFIL) containing data on all types of facilities maintained by the Airways and Facilities Division of the FAA that are common to all sectors,

and a series of files each containing data peculiar to a specific maintenance sector (SECFIL). The principal uses of the model, therefore, are:

To evaluate specific sectors or selected facility types within specific sectors for their attendant expected annual maintenance labor (and management/support) personnel requirements, direct labor costs, and salary costs.

To determine the impact on the maintenance sector or on the facility-type baseline evaluations due to specific changes in reliability, maintainability, technical or support parameters, maintenance scenario, etc.

To conduct sensitivity analysis to determine the driving parameters and their associated ranges of impact.

Specific sector maintenance evaluations are handled through normal exercise of the program, with specific sectors and facility types to be evaluated being designated by terminal inputs. The model is structured to permit evaluation of successive sectors/facility types without the need to recompile each time.

Alternative maintenance scenario evaluations can be handled in two ways: through a permanent change to file data (or establishment of additional permanent files) or through the insertion of temporary program statements to modify the main program. Selecting between these approaches for a specific application will depend on the nature and extent of the changes. If they tend to be simple, then the temporary change to the main program approach is preferred; otherwise, the changes are better made as permanent changes to the affected files. In this latter case, additional permanent file changes would again be required to restore them to their original condition once the evaluations were completed.

The best means of accomplishing sensitivity analyses is to insert temporary changes to the main program and take advantage of the looping feature of the program. To illustrate, assume that the sensitivity to some parameter (PARM) is desired and that PARM is read from either the common or sector files. Following the read statement for PARM, we could then insert the following temporary statements:

```
PRINT, * VARIATION FACTORS*,  
READ, VARF  
PARM = VARF * PARM.
```

Thus, each time PARM is read from the file, its value is modified by a terminal input for the modification factor, which, if repeated over the range of interest for the parameter, would then provide the resultant output sensitivity curves for PARM (e.g., VARF could go from 0.1 to 10).

Table 5-5 summarizes the specific terminal responses required for normal exercise of the program. The responses for usages with temporary changes to the program will depend on the nature of the changes introduced and their formats. As shown in the table, program usage is extremely simple, with terminal inputs being needed only to specify what is to be evaluated (sector/facility) during a given terminal session. The set-up of the files whose specific contents and structure are described and presented in the program documentation for the Logan maintenance sector represents the only complex aspect of program preparation.

Table 5-5. SUMMARY OF TERMINAL RESPONSE REQUIREMENTS FOR NORMAL PROGRAM EXECUTION			
Question	Terminal Response	FORTRAN Variable	Comments
1. Input sector file name?	Permanent file name of sector to be evaluated, e.g., LOGAN	SECFIL	None
2. Do you want to consider all facility types?	YES or NO	AA	None
3. How many types?	Integer number	NFT	Only if AA = YES.
4. Facility?	Facility name (e.g., ASR)	NAMF	Only if AA = YES.
5. Do you want to run another case?	YES or NO	AB	If AB = NO, program stops; otherwise, it recycles to question 1 for a new case.



## CHAPTER SIX

### SYMBOLS

All symbols and variables appearing in the program listing (shown in Figure 4-1 of Chapter Four) are summarized and described in this chapter.

Table 6-1 defines variables which are input via the sector and facility files. Table 6-2 is a listing of variable symbols and definitions.

Table 6-1. INPUT FILE SYMBOLS AND DEFINITIONS

Symbol	Definition	Units
AOH	Average annual facility operating hours	Hours per year
BLR	Intermediate level repair labor rate	Dollars per hour
BMMH	Average intermediate level repair maintenance man-hours per action	Maintenance man-hours per action
DOH	Average daily operate hours per facility type	Hours per day
FITT	Average fault isolate and test time per facility type	Maintenance man-hours per action
LABOR	Labor skill name	n/a
MLR	Average management support labor rate	Dollars per hour
MPER	Management support requirements	n/a
NAMFAC	Facility type name	n/a
MTBCMA	Minimum time between corrective maintenance action per facility type	Operate hours per failure
MTTR	Minimum time to repair per facility type	Maintenance man-hours per action
MTRR	Minimum time to remove and replace per facility type	Maintenance man-hours per action
NDS	Number of daily shifts per facility type per restoration level	n/a
NFT	Number of facility types	n/a
NRL	Number of facilities per restoration level per type	n/a
NSCAT	Skill level identifier per facility	n/a
NSL	Number of skill levels per sector	n/a
NWS	Number of weekend shifts per facility type per restoration level	n/a
PCON	Probability of contact per facility type for restoration level B	n/a
PMMH	Preventive maintenance man-hours per action per facility type	Maintenance man-hours per action
PROD	Average productivity per facility type	n/a
PRODB	Intermediate level productivity	n/a
PSLR	Overtime labor rate per skill level	Dollars per hour
RTS	Fraction of failures repaired at site per facility type	n/a
SDIF	Shift differential per skill level	n/a
SLR	Labor rate per skill level	Dollars per hour
SUF	Personnel sufficiency factor	n/a
TRT	Average travel time per facility type	Hours
TRTD	Average daily PM travel time per facility type	Hours

Table 6-2. INTERMEDIATE VARIABLE SYMBOLS AND DEFINITIONS

Symbol	Definition	Units
DEMB	Intermediate level repair demand per facility type	Maintenance man-hours
DEMBT	Total intermediate level repair demand	Maintenance man-hours
DEMD	Corrective maintenance demand per restoration level per facility type	Maintenance man-hours
DEMDC	Corrective maintenance demand per facility type	Maintenance man-hours
DEMDF	Preventive maintenance demand per facility type	Maintenance man-hours
DEMP	Preventive maintenance demand per restoration level per facility type	Maintenance man-hours
EOH	Average weekend operate hours per facility type	Hours per day
IF	Preventive maintenance frequency identified	1 or 0
LDUM	Dummy variable	n/a
MS	Daily maintenance shift identifier	1 or 0
NC	Weekend operations identifier	1 or 0
NDUM	Dummy variable	n/a
NMINS	Dummy variable	n/a
NNDD	Minimum required number of personnel per skill level	n/a
NOFT	Total number of facilities	n/a
NPER	Number of maintenance personnel per skill level	n/a
NS	Total number of shifts	n/a
PD	Daily failure allocation factor	n/a
PE	Weekend failure allocation factor	n/a
SECMCM	Program name	n/a
SMMHC	Total corrective maintenance man-hours per action per facility type	Maintenance man-hours per action
SMMHP	Total call-backs corrective maintenance man-hours per action per facility type	Maintenance man-hours per action
XDUM	Dummy variable	n/a
XNOF	Average number of failures per year per facility type	n/a
XNOFD	Average number of weekday failures	n/a
XNOFW	Average number of weekend failures	n/a
YY	Shift differential identifier	n/a
YDUM	Dummy variable	n/a