

AD-A059 636

HONEYWELL INC HOPKINS MINN  
MINI-REFRACTION SONDE FIELD TESTS. (U)  
DEC 77 C D MOTCHENBACHER

F/G 4/2


UNCLASSIFIED

NADC-76128-30-B

N62269-76-C-0368

NL

| OF |  
AD  
A059636  
REF ID:

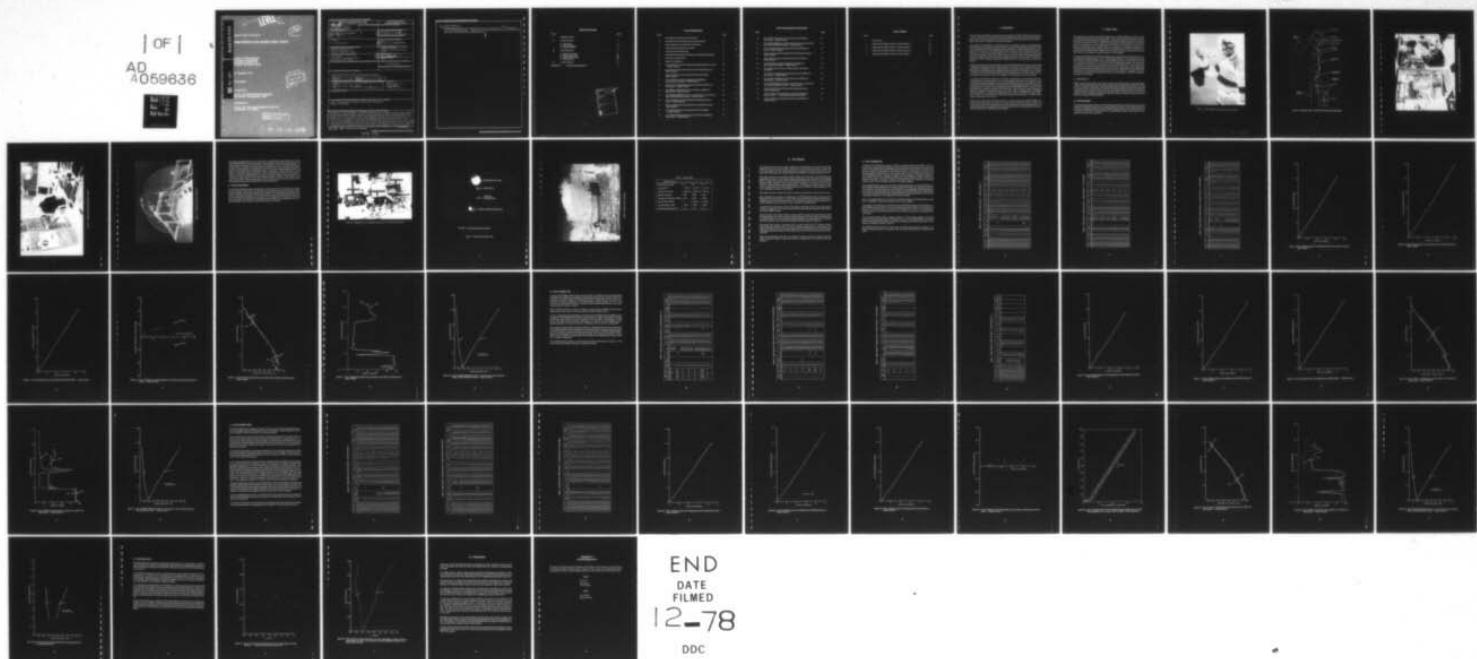


END

DATE

FILMED

12-78

DDC

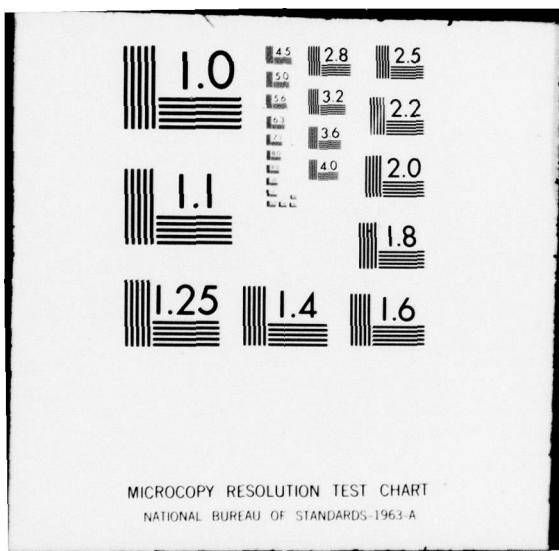

ADA059636

DDC FILE COPY

AOS 7416  
**LEVEL II**

86  
12

Report NADC-76128-30-B

## MINI-REFRACTION SONDE FIELD TESTS

Curtis D. Motchenbacher  
Honeywell Incorporated  
600 Second Street N.E.  
Hopkins, Minnesota 55343

30 December 1977

Final Report

Prepared for

NAVAL AIR DEVELOPMENT CENTER  
Warminster, Pennsylvania 18974

Sponsored by

NAVAL AIR SYSTEMS COMMAND (AIR-370)  
Washington, D.C. 20331



This document has been approved  
for public release and sale; its  
distribution is unlimited.

78 10 05 058

SECURITY CLASSIFICATION OF THIS PAGE (WHEN DATA ENTERED)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NADC 76128-30-B	2. GOVT ACCESSION NUMBER	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (AND SUBTITLE) MINI-REFRACTION SONDE FIELD TESTS	5. TYPE OF REPORT/PERIOD COVERED Final Summary Report	
7. AUTHOR(S) C. Motchenbacher	6. PERFORMING ORG. REPORT NUMBER ⑤ N62269-76-C-0368/P00002	
9. PERFORMING ORGANIZATION'S NAME/ADDRESS Honeywell Incorporated 600 Second Street, N.E. Hopkins, Minnesota 55343	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62759N F52-551 WF52551734 RG701	
11. CONTROLLING OFFICE NAME/ADDRESS Commander Naval Air Development Center Warminster, Pa. 18974	12. REPORT DATE ⑪ 30 December 1977	
14. MONITORING AGENCY NAME/ADDRESS (IF DIFFERENT FROM CONT. OFF.)	13. NUMBER OF PAGES 53	
	15. SECURITY CLASSIFICATION (OF THIS REPORT) UNCLASSIFIED	
	15a. DECLASSIFICATION DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (OF THIS REPORT) Approved for Public Release; Distribution Unlimited.		
17. DISTRIBUTION STATEMENT (OF THE ABSTRACT ENTERED IN BLOCK 20, IF DIFFERENT FROM REPORT) ⑩ Curtis D. Motchenbacher / ⑫ 60 p.		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (CONTINUE ON REVERSE SIDE IF NECESSARY AND IDENTIFY BY BLOCK NUMBER) Sonde, Meteorological, Balloon, Barometer, Hygristor, Battery Transmitter		
20. ABSTRACT (CONTINUE ON REVERSE SIDE IF NECESSARY AND IDENTIFY BY BLOCK NUMBER) The purpose of this program is to demonstrate that it is feasible to build a small, light-weight meteorological sonde capable of measuring index of refraction (Mini-Refraction Sonde), which can be launched with a 30-gram Pibal balloon. This minisonde uses a rod thermistor for temperature and a carbon hygristor for humidity measurement. For pressure measurement, a Honeywell silicon diaphragm barometer was used. This sensor uses a silicon diaphragm on an evacuated chamber with strain-sensitive resistor sensing. The sensors are electronically time-commutated on a 400-millisecond cycle. A light-weight telemetry transmitter provides 1/2 watt at 400 megahertz. Power is from a		

(continued)

SECURITY CLASSIFICATION OF THIS PAGE (WHEN DATA ENTERED)

20. lithium battery.

Laboratory measurements demonstrate an rms accuracy of 0.5°C temperature and 0.8 millibar pressure. Flight tests show good operation and good agreement with radar and Rawinsonde measurements.

SECURITY CLASSIFICATION OF THIS PAGE (WHEN DATA ENTERED)

## Table of Contents

Section	Page
I. INTRODUCTION	1
II FLIGHT TESTS	2
A. Test Facility	2
B. Test Equipment	2
C. Flight Conditions	8
III TEST RESULTS	13
A. Flight Number One	14
B. Flight Number Two	25
C. Flight Number Three	36
D. Data Reduction	49
IV CONCLUSIONS	52
APPENDIX A ACKNOWLEDGEMENTS	53

A

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY NOTES	
Det.	1

## List of Illustrations

Figure		Page
1	Mini-Refraction Sonde Used in Field Tests	3
2	Exploded View of Minisonde Showing Subassemblies	4
3	Support Equipment at NASA Met-Ops Facility	5
4	Meteorological Data Reduction Facility	6
5	Telemetry Antenna Mounting	7
6	Honeywell Ground Support Equipment in the Met-Ops Building	9
7	Sonde Launch Flight Train	10
8	Radar Corner Reflector	11
9	Plot of Altitude versus Time Measured with Mini-Refraction Sonde — Flight Number 1	18
10	Plot of Altitude versus Time Measured with NWS Rawinsonde — Flight Number 1	19
11	Plot of Altitude versus Time Measured with NASA Radar — Flight Number 1	20
12	Plot of Difference in Altitude Reading of the MRS and Rawinsonde versus Radar — Flight Number 1	21
13	Plot of Free-Air Temperature versus Altitude for the MRS and Rawinsonde — Flight Number 1	22
14	Plot of Relative Humidity versus Altitude for the MRS and Rawinsonde — Flight Number 1	23
15	Plot of Modified Refractive Index, N, and M-Units versus Altitude Read by Mini-Refraction Sonde — Flight Number 1	24
16	Plot of Altitude versus Time Measured with Mini-Refraction Sonde — Flight Number 2	30
17	Plot of Altitude versus Time Measured with NWS Rawinsonde — Flight Number 2	31
18	Plot of Altitude versus Time Measured with NASA Radar — Flight Number 2	32
19	Plot of Free-Air Temperature versus Altitude for the MRS and Rawinsonde — Flight Number 2	33

## List of Illustrations (Concluded)

Figure		Page
20	Plot of Relative Humidity versus Altitude for the MRS and Rawinsonde — Flight Number 2	34
21	Plot of Modified Refractive Index, N, and M-Units versus Altitude Read by Mini-Refraction Sonde — Flight Number 2	35
22	Plot of Altitude versus Time Measured with Mini-Refraction Sonde — Flight Number 3	40
23	Plot of Altitude versus Time Measured with NWS Rawinsonde — Flight Number 3	41
24	Plot of Altitude versus Time Measured with NASA Radar — Flight Number 3	42
25	Plot of Difference in Altitude Reading of the MRS and Rawinsonde versus Radar — Flight Number 3	43
26	Plot of Altitude versus Time for Flight Number 3 Measured with MRS	44
27	Plot of Free-Air Temperature versus Altitude for the MRS and Rawinsonde — Flight Number 3	45
28	Plot of Relative Humidity versus Altitude for the MRS and Rawinsonde — Flight Number 3	46
29	Plot of Modified Refractive Index, N, and M-Units versus Altitude Read by Mini-Refraction Sonde — Flight Number 3	47
30	Plot of N and M versus Altitude with an Expanded Scale to Illustrate Resolution	48
31	Plot of N and M versus Altitude for the First 1000 Meters of Flight Number 1 — Data Plotted at Switch Points Only	50
32	Plot of N and M versus Altitude for the First 1000 Meters of Flight Number 1	51

## **List of Tables**

<b>Table</b>		<b>Page</b>
1	Launch Data	12
2	Flight Data for Flight Number 1, Sonde Number 11	15
3	Flight Data for Flight Number 2, Sonde Number 10	26
4	Flight Data for Flight Number 2, Sonde Number 10	29
5	Flight Data for Flight Number 3, Sonde Number 9	37

## I. Introduction

The Navy has a requirement to measure the vertical profile of index of refraction from sea level to above 15,000 feet. It is necessary to make these measurements from many sizes and classes of ships. Further, these measurements must be made under typical operating conditions of calm or high winds and from stopped to full operational speed.

The purpose of this program is to demonstrate that it is feasible to build a small, lightweight meteorological sonde capable of measuring index of refraction (Mini-Refraction Sonde), which can be launched with a 30-inch diameter, 30-gram pibal balloon. In many field applications, it is difficult to fill and launch a very large balloon, either because of space limitations or because of high winds or other environmental conditions. It is very useful to have a balloon no larger than 30 inches in diameter so that it can be filled within a room and carried out through a standard ship's door for launching. Tests show that a 30-gram latex balloon, when inflated to 30 inches in diameter, will lift a 100-gram minisonde, including battery, at an ascent rate of 800 feet per minute.

During the previous section of this program, it was demonstrated that a 100-gram sonde capable of measuring temperature, pressure and humidity, could be built. This minisonde used a rod thermistor for temperature and a carbon hygristor for humidity measurement. For pressure measurement, a Honeywell silicon diaphragm barometer was used. This pressure sensor consists of a small silicon chip with strain-sensitive resistors diffused into the surface. This sensor is mounted on an evacuated tube so that changes in absolute pressure can be measured.

To commutate between the temperature, pressure, and humidity sensors and encode the meteorological data measurements, a set of meteorological electronics was developed using commercially available integrated circuits. By use of integrated circuits, it is possible to achieve all the commutation functions in a small and particularly lightweight package. The sensors are commutated on a time basis, with a complete cycle every 400 milliseconds. At a rise rate of 1000 feet per minute, this gives a complete set of data every 7 feet of altitude. A special lightweight telemetry transmitter, providing an output of 1/2 watt at 400 to 406 megahertz, was designed and constructed by the Honeywell Defense Electronics Division (DEL-D), Annapolis, Maryland. Power for the transmitter and minisonde electronics was provided by a small lithium battery consisting of 5-1/2 A cells.

The purpose of this phase of the development is to conduct flight tests of the Mini-Refraction Sonde. Three sondes were launched at the NASA facility at Wallops Island, Virginia, and tracked with radar. The sondes operated well and telemetered the meteorological data to the ground. Minisonde data agreed well with the radar height and with measurements of the National Weather Service (NWS) Rawinsonde flight.

## **II. Flight Tests**

The purpose of this contract was to perform flight tests on the Mini-Refraction Sonde. A photo of the Mini-Refraction Sonde is shown in Figure 1. The sonde is small and weighs less than 100 grams with the batteries installed. Temperature, humidity and pressure sensors are mounted in the upper section, while the meteorological electronics, battery and transmitter are in the lower section. An exploded view of the sonde is shown in Figure 2. A rod thermistor is used for temperature measurement and a carbon hygristor for humidity. For pressure measurement, a Honeywell silicon diaphragm barometer is used. This pressure sensor consists of a small silicon chip with strain-sensitive resistors diffused into the surface. This sensor is mounted on an evacuated tube so that changes in absolute pressure can be measured.

To commutate between the temperature, pressure, and humidity sensors and encode the meteorological data measurements, a set of meteorological electronics was developed by using commercially available integrated circuits. With integrated circuits, it is possible to achieve all the commutation functions in a small and particularly lightweight package. The sensors are commutated on a time basis, with a complete cycle every 400 milliseconds. At a rise rate of 1000 feet per minute, this gives a complete set of data every 7 feet of altitude. A special, lightweight telemetry transmitter providing an output of 1/2 watt at 400 to 406 megahertz was designed and constructed by the Honeywell Defense Electronics Division (DEL-D), Annapolis, Maryland. Power for the transmitter and minisonde electronics was provided by a small lithium battery consisting of five A cells.

### **A. TEST FACILITY**

Flight tests were performed at the NASA launch and tracking facility at Wallops Island, Virginia. Mini-Refraction Sonde launches were performed at the Met-Ops Building. The NASA facility is excellent for flight tests. It provides balloon filling, handling and launching, has radar to track the balloon train and read out altitude, and there are GMD antennas for tracking the 1680-MHz sonde. In addition, skilled personnel are available to give advice on launching and tracking. Some of the support equipment at Met-Ops is shown in Figure 3. Figure 4 shows the facility for reducing NWS sonde data.

### **B. TEST EQUIPMENT**

Ground station equipment was set up in the Met-Ops building. The ground station receives and records the telemetered signals from the Mini-Refraction Sonde. A UHF corner reflector antenna was mounted on the roof as shown in Figure 5. Since the antenna is broadly directional, it is aimed in the direction of the sonde flight. A preamplifier was used at the antenna to compensate for losses on the long cable.



Figure 1. Mini-Refraction Sonde Used in Field Tests

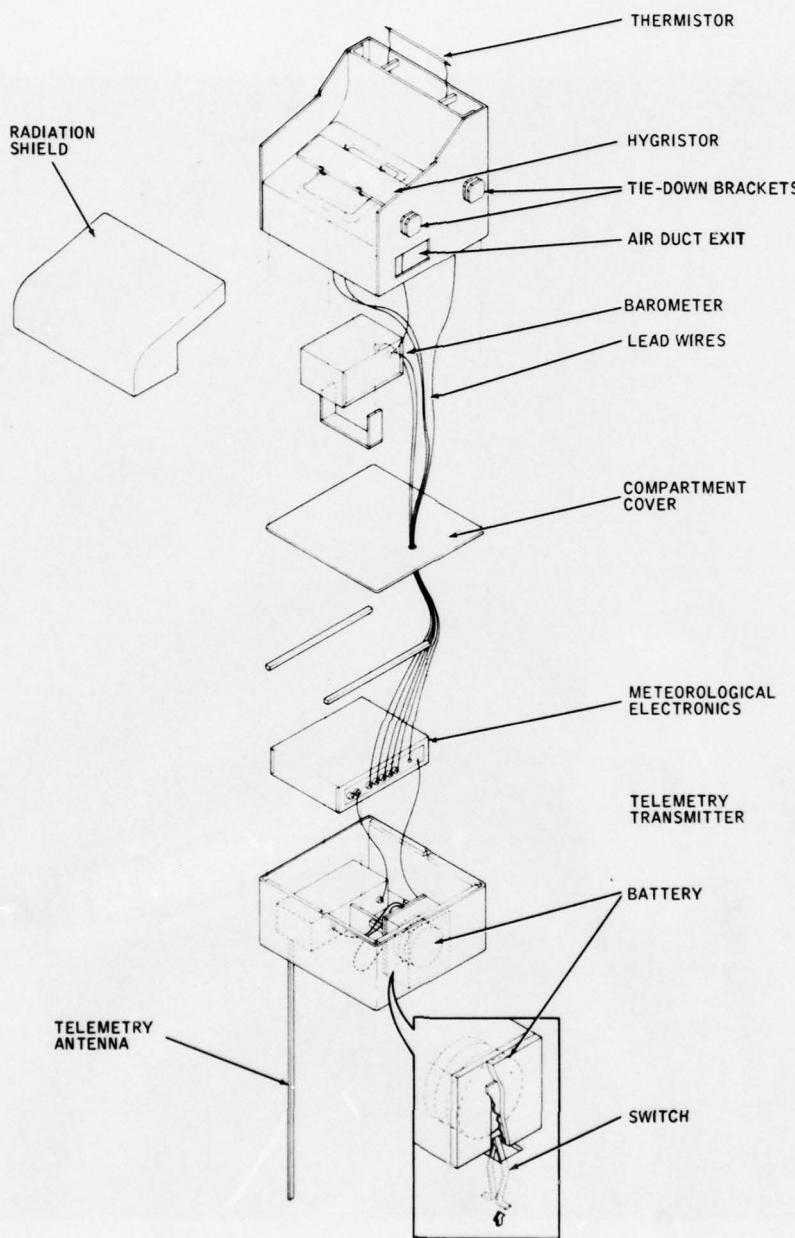


Figure 2. Exploded View of Minisonde Showing Subassemblies



Figure 3. Support Equipment at NASA Met-Ops Facility



Figure 4. Meteorological Data Reduction Facility

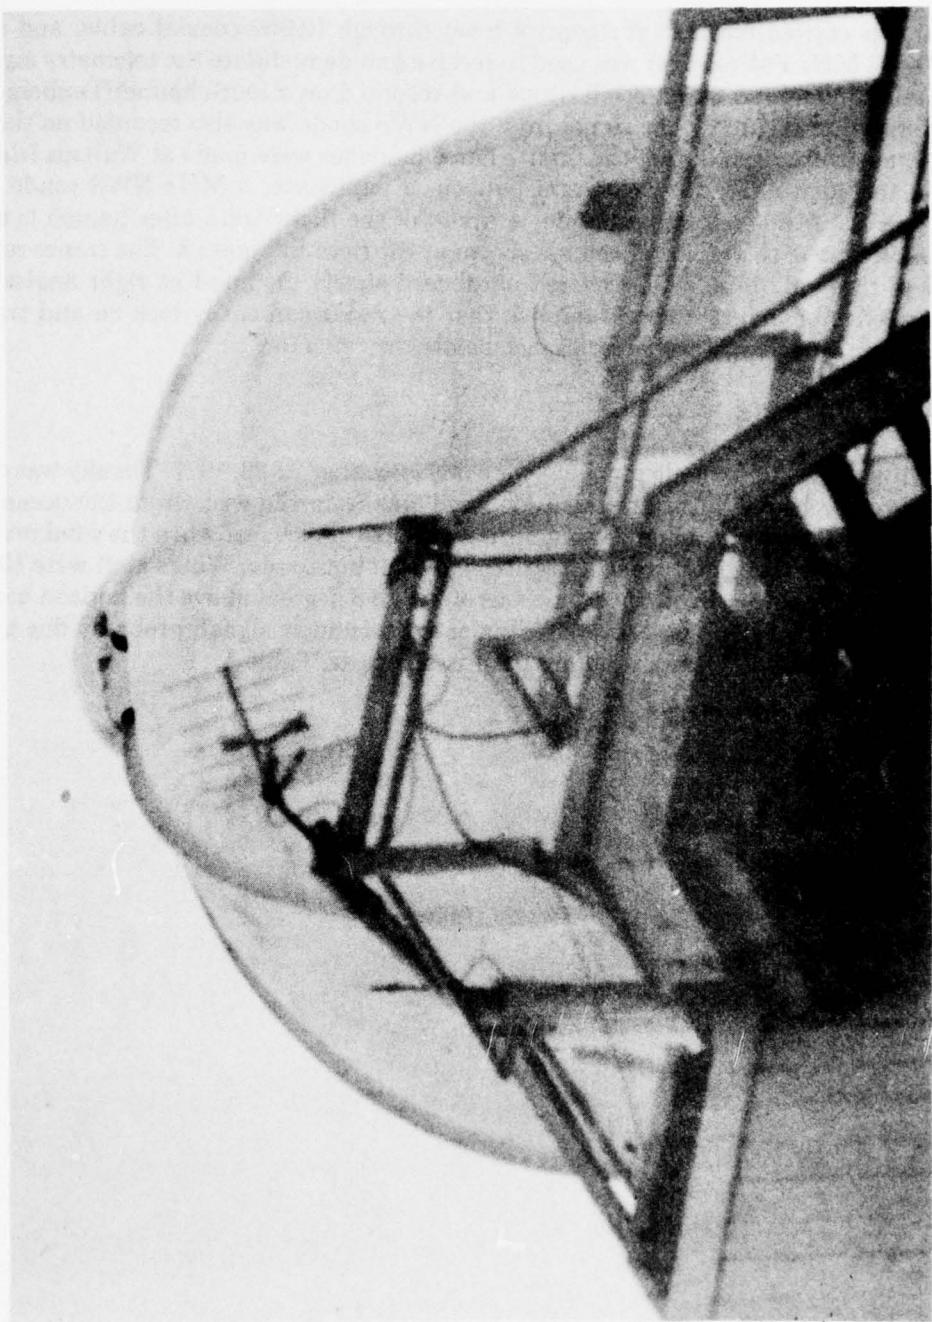


Figure 5. Telemetry Antenna Mounting

The signal was carried down to the control room through RG/59 coaxial cable, and a Nems-Clarke 400-406 MHz FM receiver was used to receive and demodulate the telemetry signal. The sonde signal is monitored on an oscilloscope and recorded on a four-channel Tanberg tape recorder, as shown in Figure 6. The signal from the NWS sonde was also recorded on the tape to provide a time comparison during the flight. Three launches were made at Wallops Island. The flight train included a 600- to 2000-gram balloon, a parachute, a MHz NWS sonde, a radar reflector, and the Mini-Refraction Sonde. A photo of the flight train after launch is shown in Figure 7. A closeup of the radar reflector is shown at the right in Figure 8. The corner reflector is composed of three aluminum foil-covered cardboard sheets mounted at right angles to each other. This reflector makes a good target so that the radar can easily lock on and track. The Mini-Refraction Sonde was tethered 25 feet below the reflector.

### C. FLIGHT CONDITIONS

The three Mini-Refraction Sonde launches were on November 22-23, 1977. The sky was overcast with ground fog or heavy haze. Low altitude wind was from the east (from the ocean). After launch, the flight train went inland slowly until it reached 10,000 feet when the wind reversed to the west. The sonde came back over the station and went out to sea. Winds aloft were 100 to 150 knots. Near the end of the flight, the sonde was only 6 to 8 degrees above the horizon because of the strong winds aloft. There was severe fading of the telemetry signal, probably due to multi-path interference over the ocean. Launch data is shown in Table 1.



Figure 6. Honeywell Ground Support Equipment in the Met-Ops Building

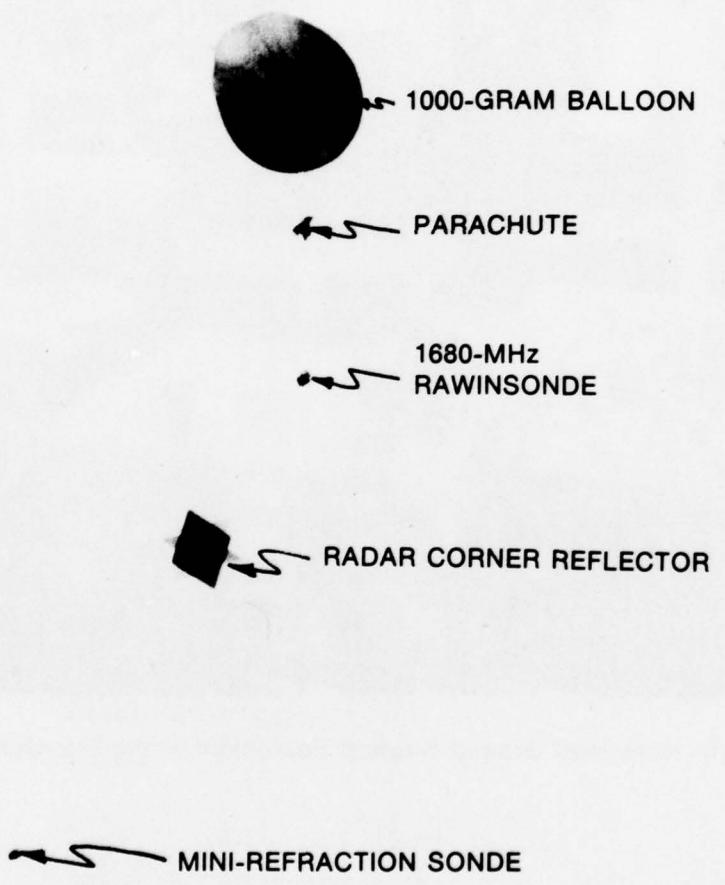


Figure 7. Sonde Launch Flight Train

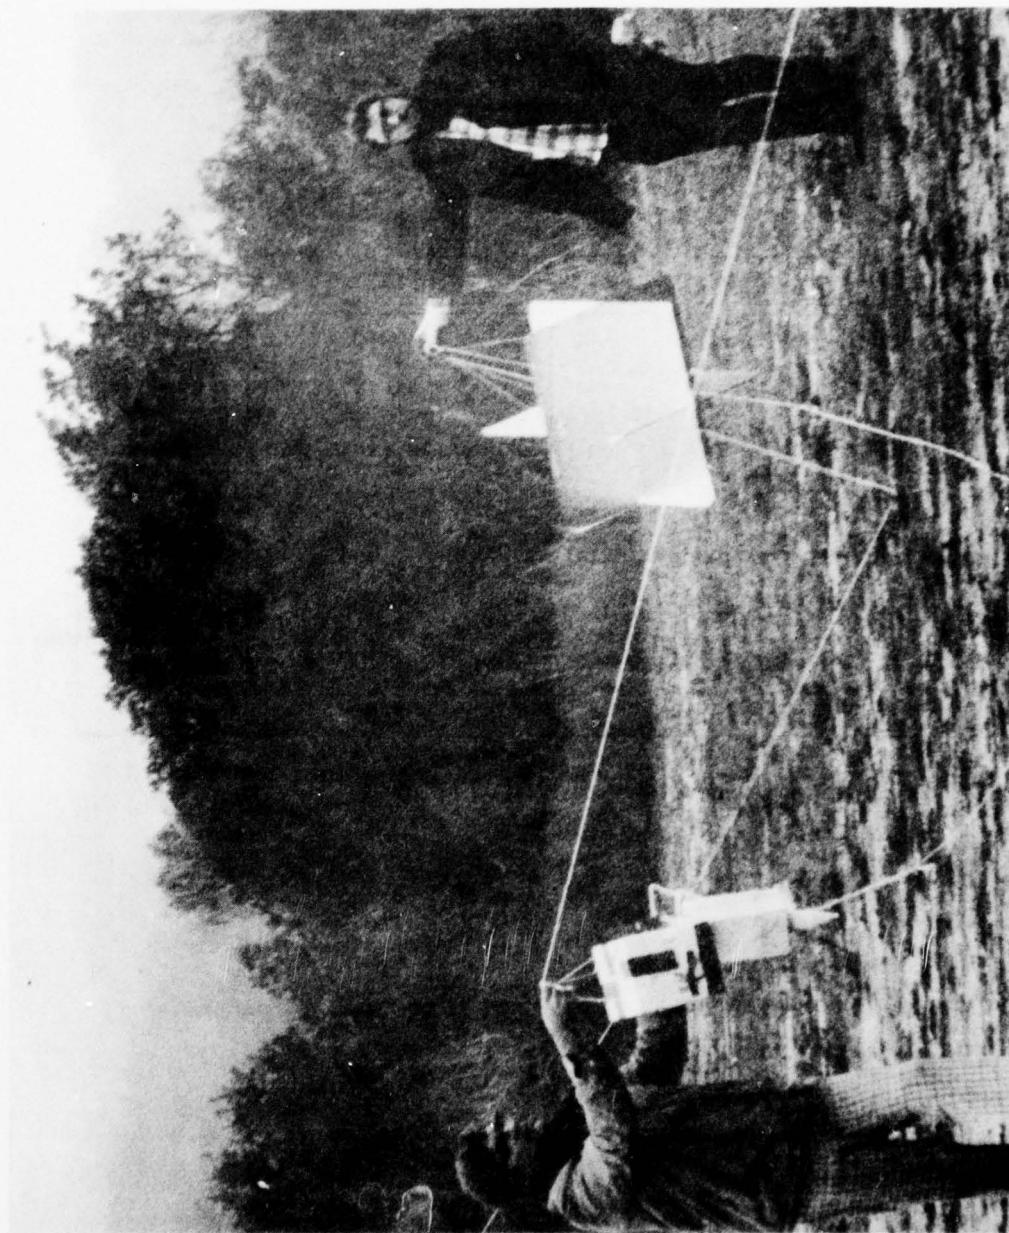


Figure 8. Radar Corner Reflector

**Table 1. Launch Data**

Flight Number	1	2	3
Sonde Serial Number	11	10	9
Launch Date	11-22-77	11-23-77	11-23-77
Launch Time (EST)	2:30 p.m.	10:20 a.m.	2:00 p.m.
Balloon Size (gms)	600	2000	600
Transmitter Frequency (MHz)	404.3	404.5	403.6
Record Tape Number	1	2 and 3	4 and 5
Launch Pressure (mB)	1031.3	1024.9	1020.4
Launch Temperature (°C)	6.7	9.4	11.1

### **III. Test Results**

The purpose of this test was to make a preliminary demonstration of operation of the Mini-Refraction Sonde under actual flight conditions. The three flights were very successful and much was learned. All three sondes operated and continued to transmit data for one to two hours. This corresponds to an altitude greater than 100,000 feet and temperatures below -60°C.

Since there was no on-line processor available to reduce the sonde data, the received telemetry signals were recorded on a four-channel, analog, FM magnetic tape recorder for later processing. These five tapes were returned to Honeywell's Hopkins, Minnesota, facility for processing. The Honeywell Data Laboratory facilities were used as described in the previous report, NADC 76129-30, "Miniature Meteorological Balloonsonde." This laboratory system consists of a digitizer to measure the period of the telemetered data and a Honeywell 516 Minicomputer to calculate temperature, pressure and humidity.

The flights were also tracked with radar to provide a measurement of altitude versus time.

Each minisonde was attached to the flight train of a NWS Rawinsonde launch, and a copy of the Rawinsonde data was provided to us by NASA. Since the Rawinsonde telemetry signal was recorded on one channel of the tape recorder, it was possible to compare altitude measurements of the Mini-Refraction Sonde with the contact numbers of the Rawinsonde.

A listing of this total data set is shown in the table in each flight section. Time is the common baseline of comparison. The tables list radar altitude, Rawinsonde readings and Mini-Refraction Sonde (MRS) readings.

During the early part of the first flight, telemetry difficulties were encountered because of the remote placement of the dipole antenna and high cable loss. When the receiver was switched to the UHF antenna with an antenna-mounted preamplifier, the signal cleared. This problem reduced the quality of the recorded Mini-Refraction Sonde signal for flight one.

The second launch was in conjunction with an ozone sonde launch. To measure ozone, a Rawinsonde was modified to time commutate a frequency signal from the ozone sensor. This made it impossible to identify the exact contact points of the Rawinsonde. It was not possible to make exact comparison between the Mini-Refraction Sonde and Rawinsonde pressure and altitude data.

Because of the difficulties with the first two flights, only flight number three represents the best flight comparison. Results of flight three should be representative of the present sonde performance.

## A. FLIGHT NUMBER ONE

A listing of all the flight data is shown in Table 2. Greenwich Mean Time (GMT) is shown in column one to compare with the radar track. Column two gives time after launch in minutes and seconds. Column three lists the NWS Rawinsonde baroswitch contact points and column seven shows the pressure corresponding to each contact number. In columns four, five and six are shown the sonde altitude versus time as tracked by radar, read by the NWS sonde and read by the Mini-Refraction Sonde. Columns 7 through 12 give the readings of pressure, temperature and humidity read by the NWS Rawinsonde and the Mini-Refraction Sonde. The last four columns on the right, 13 through 16, show the calculated values of N and M for the modified refractive index. All of this data is plotted in the following figures.

Plots of sonde altitude versus time are shown in Figures 9 through 11 for the Mini-Refraction Sonde (MRS), National Weather Service Rawinsonde (NWS) and radar. These three plots follow so closely to each other that they cannot be plotted on a single graph and still be separated. To illustrate the variation between altitude readings, the NWS altitude and the MRS altitude were subtracted from the NASA radar-measured altitude and plotted in Figure 12. Over the first 7 kilometers (20,000 feet) the readings agree within 60 meters.

There is no apparent reason for the deviation in altitude reading by the Mini-Refraction Sonde above 7 kilometers. This does not appear in the other two flights.

A plot of free-air temperature versus altitude for the NWS Rawinsonde and the Mini-Refraction Sonde (MRS) is shown in Figure 13. The two readings agree closely. There is no systematic error apparent. Note that there are two inversion layers indicated in the data at 1 and 3 kilometers. For some reason, the minisonde responded to the 3 kilometer inversion more quickly than the NWS sonde.

The measured humidity profile is plotted in Figure 14. The humidity readings by the NWS sonde and minisonde agree within the hygristor accuracy. The readings differ by 10 percent relative humidity above 9 kilometers, but the free-air temperature at this level is below  $-40^{\circ}\text{C}$ , causing the hygristor response to fall off.

The modified refractive index, N, and M-units are plotted versus altitude in Figure 15. Although the data is plotted to 12 kilometers, most of the index variations are at 3 kilometers and below.

**Table 2. Flight Data for Flight Number 1, Sonde Number 11**


Time GMT M. M. S.	Time T <sub>o</sub> + M. S.	NWS Baro. Cont.		NASA Radar Alt. -M		MRS Alt. -M		NWS Press. mb <sub>6</sub>		MRS Press. mb <sub>6</sub>		NWS Temp. °C		MRS Temp. °C		NWS R. H. %		MRS R. H. %		NWS Refr. Index		MRS Refr. Index				
		N	M	161	161	268	268	373	373	9	9	987.4	983.9	4.7	5.5	7.5	7.5	77.3	82.0	320.5	332.8	322.8	334.9			
19:37:37	00:09	4	74	62.6	1028.6	1029.1	5.8	1014.8	1009.1	4.5	6.4	-	87.5	318.5	347.2	320.3	348.7	322.7	317.2	362.7	318.5	347.2	322.7	334.9		
19:38:04	00:36	5	267.6	1001.0	996.0	5.5	5.7	91.2	93.6	5.5	5.7	92.4	95.3	313.6	374.8	315.1	363.3	318.3	363.3	318.3	363.3	318.3	363.3	318.3		
19:38:31	01:03	6	372.7	973.9	987.4	4.7	5.3	974.6	968.9	4.6	4.6	67.1	72.2	298.3	379.1	300.4	380.4	375.5	374.8	313.6	374.8	315.1	375.5	313.6	375.5	
19:38:55	01:27	7	501.3	971.5	974.6	4.6	4.6	961.2	956.5	4.5	4.6	68.0	71.8	295.0	392.4	296.7	392.9	380.4	380.4	300.4	379.1	300.4	380.4	300.4	380.4	
19:39:22	01:54	8	608	618.5	974.5	4.6	4.6	948.4	943.7	4.6	4.6	-	78.3	298.2	413.0	296.2	296.2	296.2	409.6	409.6	300.4	379.1	300.4	380.4	300.4	380.4
19:39:46	02:18	9	722	720.2	948.4	4.6	4.6	931.9	935.4	6.3	6.2	96.3	98.2	302.9	434.3	303.5	433.3	303.5	433.3	303.5	433.3	303.5	433.3	303.5	433.3	
19:40:10	02:42	10	806	948.2	922.8	919.5	8.2	905.5	897.6	9.8	10.0	96.6	97.6	303.4	454.0	303.1	452.0	303.1	452.0	303.1	452.0	303.1	452.0	303.1	452.0	
19:40:34	03:06	11	935	935.4	861.0	861.0	161.0	861.0	857.3	7.9	8.6	97.5	98.1	296.9	499.4	296.4	496.4	296.4	496.4	296.4	496.4	296.4	496.4	296.4	496.4	
19:41:01	03:33	12	967	1089	1163.5	897.6	894.0	9.8	10.2	9.8	10.2	96.6	96.9	300.7	487.1	300.9	485.1	300.9	485.1	300.9	485.1	300.9	485.1	300.9	485.1	
19:41:28	04:00	13	1193	1287.4	885.4	882.9	9.3	9.8	9.3	9.8	-	95.8	98.1	291.8	515.3	292.2	513.0	292.2	513.0	292.2	513.0	292.2	513.0	292.2	513.0	
19:41:52	04:24	14	1311	1403.7	873.4	868.6	8.6	9.2	9.2	9.2	97.5	98.1	291.8	515.3	292.2	513.0	292.2	513.0	292.2	513.0	292.2	513.0	292.2	513.0		
19:42:19	04:51	15	1412	1403.7	861.0	857.3	7.9	8.6	97.6	97.6	97.6	97.6	97.9	287.4	527.6	287.6	525.0	287.6	525.0	287.6	525.0	287.6	525.0	287.6	525.0	
19:42:43	05:15	16	1511	1512.5	861.0	857.3	161.0	845.7	845.7	7.5	8.4	95.8	91.6	303.4	454.0	303.9	471.6	303.9	471.6	303.9	471.6	303.9	471.6	303.9	471.6	
19:43:07	05:39	17	1511	1635	161.0	845.2	845.2	837.2	832.9	7.0	7.5	94.6	92.2	276.7	553.8	275.6	549.2	275.6	549.2	275.6	549.2	275.6	549.2	275.6	549.2	
19:43:34	06:06	18	1743	1750.9	1886.0	825.4	821.1	1886.0	1886.0	6.2	6.7	-	93.6	271.8	566.8	271.5	563.0	271.5	563.0	271.5	563.0	271.5	563.0	271.5	563.0	
19:43:58	06:30	19	1875	1979.0	1979.0	1809.4	809.4	1979.0	1979.0	5.6	6.0	95.0	95.3	267.7	580.9	267.7	577.1	267.7	577.1	267.7	577.1	267.7	577.1	267.7	577.1	
19:44:25	06:57	20	2011	2124	2232.8	802.0	797.9	797.9	797.9	4.7	5.4	95.1	95.9	263.3	594.5	263.7	591.0	263.7	591.0	263.7	591.0	263.7	591.0	263.7	591.0	
19:44:52	07:24	21	2124	2230	2232.8	790.8	785.9	785.9	785.9	4.3	5.0	94.5	94.5	259.9	609.5	259.2	609.5	259.2	609.5	259.2	609.5	259.2	609.5	259.2	609.5	
19:45:16	07:48	22	2230	2325	2338.4	779.4	774.4	774.4	774.4	3.8	4.4	94.4	94.4	254.7	623.8	255.0	619.5	255.0	619.5	255.0	619.5	255.0	619.5	255.0	619.5	
19:45:49	08:12	23	2325	2442.8	768.8	763.0	3.0	3.7	3.0	3.7	-	95.8	95.7	250.7	638.4	250.9	633.8	250.9	633.8	250.9	633.8	250.9	633.8	250.9	633.8	
19:46:07	08:39	24	2442.8	2587.4	757.0	752.0	2.3	2.3	2.3	2.3	96.0	99.7	246.6	652.2	246.5	647.2	246.5	647.2	246.5	647.2	246.5	647.2	246.5	647.2		
19:46:43	09:15	25	2591	2715.8	746.0	740.2	1.2	2.6	1.2	2.6	67.5	69.2	232.7	658.4	233.4	653.7	233.4	653.7	233.4	653.7	233.4	653.7	233.4	653.7		
19:47:01	09:33	26	2701	2825	735.0	730.3	1.5	4.8	1.5	4.8	15.0	19.5	210.1	654.2	212.0	650.7	212.0	650.7	212.0	650.7	212.0	650.7	212.0	650.7		
19:47:25	09:57	27	2825	2945	2967.3	724.4	718.9	3.1	4.5	4.5	54.5	58.5	223.2	687.8	224.8	683.7	224.8	683.7	224.8	683.7	224.8	683.7	224.8	683.7		
19:47:49	10:21	28	2945	3061	3079.1	713.6	707.9	2.8	3.5	3.5	-	64.5	225.2	708.8	223.2	700.9	223.2	700.9	223.2	700.9	223.2	700.9	223.2	700.9		
19:48:13	10:45	29	3061	3201	3207.1	703.0	696.8	3.0	3.7	3.0	2.5	85.0	80.2	226.8	729.9	225.0	722.0	225.0	722.0	225.0	722.0	225.0	722.0	225.0	722.0	
19:48:37	11:09	30	3201	3324	3329.2	692.2	686.4	1.4	1.7	1.7	83.0	84.9	222.1	743.6	222.8	738.0	222.8	738.0	222.8	738.0	222.8	738.0	222.8	738.0		
19:49:04	11:36	31	3324	3408	3454.2	680.2	675.8	0.2	0.7	0.7	48.0	56.1	206.8	746.9	209.4	743.0	209.4	743.0	209.4	743.0	209.4	743.0	209.4	743.0		
19:49:28	12:00	32	3392	3569	3590.6	669.8	664.4	-0.5	0.5	0.5	64.3	66.6	208.7	770.4	209.5	764.4	209.5	764.4	209.5	764.4	209.5	764.4	209.5	764.4		
19:49:52	12:24	33	3569	3688	3701.0	659.8	655.3	-0.8	-0.1	-0.1	-	41.4	196.8	775.3	198.8	770.1	198.8	770.1	198.8	770.1	198.8	770.1	198.8	770.1		
19:50:19	12:51	34	3688	3836	3840.2	649.4	644.0	-2.0	-0.9	-0.9	16.0	22.9	188.1	787.6	190.2	782.3	190.2	782.3	190.2	782.3	190.2	782.3	190.2	782.3		
19:50:43	13:15	35	3836	3950	3959.5	639.2	634.5	-2.3	-1.3	-1.3	16.0	8.8	185.6	803.5	183.6	793.9	183.6	793.9	183.6	793.9	183.6	793.9	183.6	793.9		
19:51:13	13:45	36	3950	3959.5	3959.5	639.2	634.5	-2.3	-1.3	-1.3	16.0	8.8	185.6	803.5	183.6	793.9	183.6	793.9	183.6	793.9	183.6	793.9	183.6	793.9		
19:51:37	14:09	37	3959.5	3959.5	3959.5	639.2	634.5	-2.3	-1.3	-1.3	16.0	8.8	185.6	803.5	183.6	793.9	183.6	793.9	183.6	793.9	183.6	793.9	183.6	793.9		

**Table 2. Flight Data for Flight Number 1, Sonde Number 11 (Continued)**


TIME GMT M M S	TIME T <sub>o</sub> + M S	NWS Baro. Cont.	NASA Radar Alt-M	NWS Alt-M	MRS Alt-M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	MRS R.H. %	NWS R.H. %	MRS R.H. %	NWS Refr. Index		MRS Refr. Index	
													N	M	N	M
19:52:04	14:36	38	4088	629.0	624.4	-2.7	-1.7	<10.0	7.9	181.2	819.0	180.4	810.4			
19:52:28	15:00	39	4215	619.0	614.0	-2.6	-1.6	<10.0	7.9	178.2	837.5	177.6	828.8			
19:52:52	15:24	40	4334	6360.9	604.7	-3.0	-2.0	-	8.5	175.7	853.9	175.3	845.1			
19:53:19	15:51	41	4479	599.6	594.9	-3.8	-2.6	<10.0	9.3	173.2	871.3	173.0	862.5			
19:53:46	16:18	42	4614	4599.0	584.5	-5.0	-4.0	<10.0	9.9	170.8	889.5	170.8	880.6			
19:54:13	16:45	43	4745	575.1	580.2	-6.1	-5.2	11.0	10.8	168.9	906.4	168.9	897.3			
19:54:37	17:09	44	4865	565.5	570.6	-7.0	-6.3	13.0	13.9	167.0	924.3	167.2	915.1			
19:55:04	17:36	45	4994	5000.9	561.4	-7.6	-6.8	10.5	10.5	164.0	941.0	164.2	931.2			
19:55:28	18:00	46	5129.5	552.2	547.0	-8.3	-7.4	10.0	10.3	161.5	959.3	161.6	949.2			
19:55:55	18:27	47	5241	5259.6	543.2	-9.0	-8.2	10.0	10.3	159.3	976.5	159.4	966.5			
19:56:22	18:54	48	5377	5396.4	538.0	-10.1	-9.3	10.0	10.7	157.0	994.9	157.2	984.5			
19:56:52	19:24	49	5520	5510.0	520.0	-11.1	-10.2	10.0	10.4	154.9	1011.7	153.0	1001.0			
19:57:19	19:51	50	5659	5643.3	516.4	-12.3	-11.3	-	10.3	152.9	1028.9	152.9	1018.9			
19:57:46	20:18	51	5794	507.4	501.7	-13.1	-12.7	<10.0	10.6	150.8	1048.0	150.8	1036.9			
19:58:10	20:42	52	5910	5930.3	498.8	-14.5	-13.9	10.0	11.1	148.6	1065.9	148.6	1054.4			
19:58:37	21:09	53	6047	6051.5	490.4	-15.7	-15.0	10.9	10.9	146.9	1081.7	146.9	1070.2			
19:59:04	21:36	54	6201.0	481.8	476.2	-16.4	-15.6	11.0	11.3	144.6	1101.7	144.6	1089.7			
19:59:31	22:03	55	6309	473.6	468.0	-17.4	-16.5	12.3	12.3	142.6	1119.6	142.7	1107.3			
20:00:01	22:33	56	6453	6461.2	475.4	-18.2	-17.6	12.0	12.9	140.7	1137.2	140.8	1124.7			
20:00:25	23:57	57	6588	6591.6	459.9	-18.7	-18.1	12.0	12.9	138.4	1156.6	138.5	1143.7			
20:00:49	23:21	58	6725	6736.5	448.8	-19.6	-19.1	12.0	12.9	135.9	1178.1	136.1	1164.7			
20:01:13	23:45	59	6848	6880.6	441.0	-20.9	-20.2	12.0	12.5	134.1	1195.8	134.1	1182.5			
20:01:40	24:12	60	6989	7019.3	433.0	-21.3	-21.1	12.1	12.7	132.0	1215.0	132.1	1201.3			
20:02:04	24:36	61	7135	425.2	418.7	-22.6	-21.8	12.5	12.5	130.1	1233.4	130.1	1219.5			
20:02:28	25:00	62	7266	7284.9	417.4	-23.1	-22.3	12.0	12.3	127.9	1252.5	127.9	1238.2			
20:02:55	25:27	63	7404	7566.1	410.4	-24.4	-23.5	12.0	11.7	126.1	1271.5	126.1	1256.5			
20:03:22	25:54	64	7554	402.2	395.7	-25.8	-24.8	12.0	11.8	124.2	1290.4	124.2	1275.3			
20:03:49	26:21	65	7677	7721.6	394.8	-26.8	-25.7	12.0	12.5	122.1	1311.0	122.1	1295.7			
20:04:19	26:51	66	7814	7843.1	387.2	-28.0	-27.9	12.5	12.6	120.5	1328.9	120.5	1313.5			
20:04:49	27:21	67	7959	7986.6	380.2	-29.1	-28.1	12.5	13.2	118.7	1347.9	118.7	1331.9			
20:05:16	27:48	68	8101	8125.9	372.8	-30.2	-29.3	13.0	13.1	116.9	1366.8	116.9	1350.5			
20:05:43	28:15	69	8230	8265.8	365.0	-31.0	-30.0	12.5	12.9	114.9	1386.8	114.9	1370.2			
20:06:10	28:42	70	8348	8412.1	358.4	-31.2	-31.2	13.6	13.6	113.1	1406.7	113.2	1389.8			
20:06:40	29:12	71	8506	8554.2	351.4	-33.1	-32.3	13.0	13.7	111.4	1426.4	111.4	1409.2			

**Table 2. Flight Data for Flight Number 1, Sonde Number 11 (Concluded)**

TIME GMT M M S	TIME T <sub>o</sub> + M S	NWS Baro. Cont.		NASA Radar Alt-M		NWS Press. mb		MRS Press. mb		NWS Temp. °C		MRS Temp. °C		NWS R.H. %		MRS R.H. %		NWS Refr. Index		MRS Refr. Index	
		M	S	M	S	Alt-M	Alt-M	NWS	MRS	NWS	MRS	NWS	MRS	NWS	MRS	NWS	MRS	N	M	N	M
20:07:07	29:39	72	8647	8707.1	344.2	338.0	-33.8	-32.9	13.0	13.2	109.5	1446.5	109.5	1429.0	109.5	1446.5	107.5	1468.8	107.5	1451.1	
20:07:34	30:06	73	8764	8853.7	337.6	330.4	-34.7	-34.0	13.0	13.3	105.8	1488.0	105.8	1469.9	105.8	1488.0	103.9	1510.0	103.9	1491.3	
20:08:01	30:33	74	8915	9001.4	330.8	324.1	-35.7	-34.8	13.5	14.4	103.9	1528.9	102.4	1510.0	102.4	1528.9	102.4	1528.9	102.4	1510.0	
20:08:25	30:57	75	9046	9091	324.2	317.1	-36.7	-35.7	14.0	14.0	102.4	1528.9	102.4	1510.0	102.4	1528.9	102.4	1528.9	102.4	1510.0	
20:08:52	31:24	76	9103	9103	317.6	310.7	-37.1	-37.1	17.0	16.5	100.9	1549.0	100.9	1529.4	100.9	1549.0	100.9	1529.4	100.9	1529.4	
20:09:22	31:54	77	9333	9419.7	311.0	304.2	-39.0	-38.4	27.0	22.0	100.9	1549.0	100.9	1529.4	100.9	1549.0	100.9	1529.4	100.9	1529.4	
20:09:49	32:21	78	9497	9554.8	304.2	298.0	-40.0	-39.2	40.5	34.6	99.4	1569.3	99.3	1549.9	99.3	1569.3	99.3	1549.9	99.3	1549.9	
20:10:16	32:48	79	9635	9716.3	298.2	291.6	-41.1	-40.1	47.5	45.6	97.7	1590.7	97.7	1570.8	97.7	1590.7	97.7	1570.8	97.7	1570.8	
20:10:43	33:15	80	9769	9877.4	282.0	285.6	-42.1	-41.1	-	51.4	96.1	1610.4	96.1	1590.7	96.1	1610.4	96.1	1590.7	96.1	1590.7	
20:11:10	33:42	81	9804	9925	285.8	280.0	-43.2	-42.1	51.0	53.3	94.3	1632.9	94.6	1608.9	94.6	1632.9	94.6	1608.9	94.6	1608.9	
20:11:34	34:06	82	10025	9956	10149.0	279.6	-44.2	-43.5	53.0	56.5	92.9	1650.8	93.0	1630.2	93.0	1650.8	93.0	1630.2	93.0	1630.2	
20:12:01	34:33	83	10162	10273	273.6	273.6	-45.5	-44.6	52.5	57.3	91.0	1674.5	91.1	1653.2	91.1	1674.5	91.1	1653.2	91.1	1653.2	
20:12:28	35:00	84	10248	10461.6	267.1	261.6	-46.5	-45.5	52.4	57.2	89.5	1693.8	89.6	1672.5	89.6	1693.8	89.6	1672.5	89.6	1672.5	
20:12:49	35:21	85	10439	10648	261.8	256.0	-47.6	-46.2	-	56.2	87.9	1714.9	87.9	1693.5	87.9	1714.9	87.9	1693.5	87.9	1693.5	
20:13:29	35:51	86	10781	10900.2	256.2	249.9	-48.6	-47.4	52.5	56.7	86.2	1737.4	86.2	1715.7	86.2	1737.4	86.2	1715.7	86.2	1715.7	
20:13:49	36:21	87	10747	11051.0	250.4	244.4	-50.0	-48.7	48.0	53.6	84.7	1757.9	84.8	1735.2	84.8	1757.9	84.8	1735.2	84.8	1735.2	
20:14:19	36:51	88	10895	11197.8	244.6	238.7	-51.2	-49.7	46.0	50.5	83.1	1780.3	83.2	1757.2	83.2	1780.3	83.2	1757.2	83.2	1757.2	
20:14:46	37:18	89	11028	11346.9	238.8	234.0	-52.3	-51.7	45.0	49.3	82.2	1795.5	82.2	1772.4	82.2	1795.5	82.2	1772.4	82.2	1772.4	
20:15:16	37:48	90	11178	11346.9	233.6	228.2	-53.5	-52.5	-	47.9	80.4	1820.0	80.6	1796.4	80.6	1820.0	80.6	1796.4	80.6	1796.4	
20:15:43	38:15	91	11315	11486.7	228.2	223.1	-54.9	-53.7	42.5	47.2	79.0	1840.4	79.1	1816.4	79.1	1840.4	79.1	1816.4	79.1	1816.4	
20:16:13	38:45	92	11460	11636.4	223.0	218.2	-55.7	-54.5	42.0	46.8	77.5	1861.6	77.6	1837.3	77.6	1861.6	77.6	1837.3	77.6	1837.3	
20:16:43	39:15	93	11582	11784.0	217.8	213.2	-56.5	-55.3	42.0	46.4	76.0	1883.9	76.1	1859.1	76.1	1883.9	76.1	1859.1	76.1	1859.1	
20:17:16	39:48	94	11752	11954.1	212.8	207.6	-56.5	-55.3	42.0	46.4	74.0	1912.4	74.1	1887.3	74.1	1912.4	74.1	1887.3	74.1	1887.3	
20:17:46	40:18	95	11903	12101.9	207.8	202.6	-56.9	-55.8	-	45.8	72.4	1936.8	72.4	1911.6	72.4	1936.8	72.4	1911.6	72.4	1911.6	
20:18:16	40:48	96	12048	12261.2	202.8	197.8	-57.6	-56.2	41.0	45.5	70.9	1960.8	70.9	1935.2	70.9	1960.8	70.9	1935.2	70.9	1935.2	
20:18:49	41:21	97	12202	12413.4	198.0	193.3	-58.3	-57.2	40.0	44.9	69.6	1981.3	69.5	1956.4	69.5	1981.3	69.5	1956.4	69.5	1956.4	
20:19:19	41:51	98	12344	12573.0	193.0	188.5	-59.3	-57.7	40.0	44.9	68.0	2007.6	68.0	1981.0	68.0	2007.6	68.0	1981.0	68.0	1981.0	

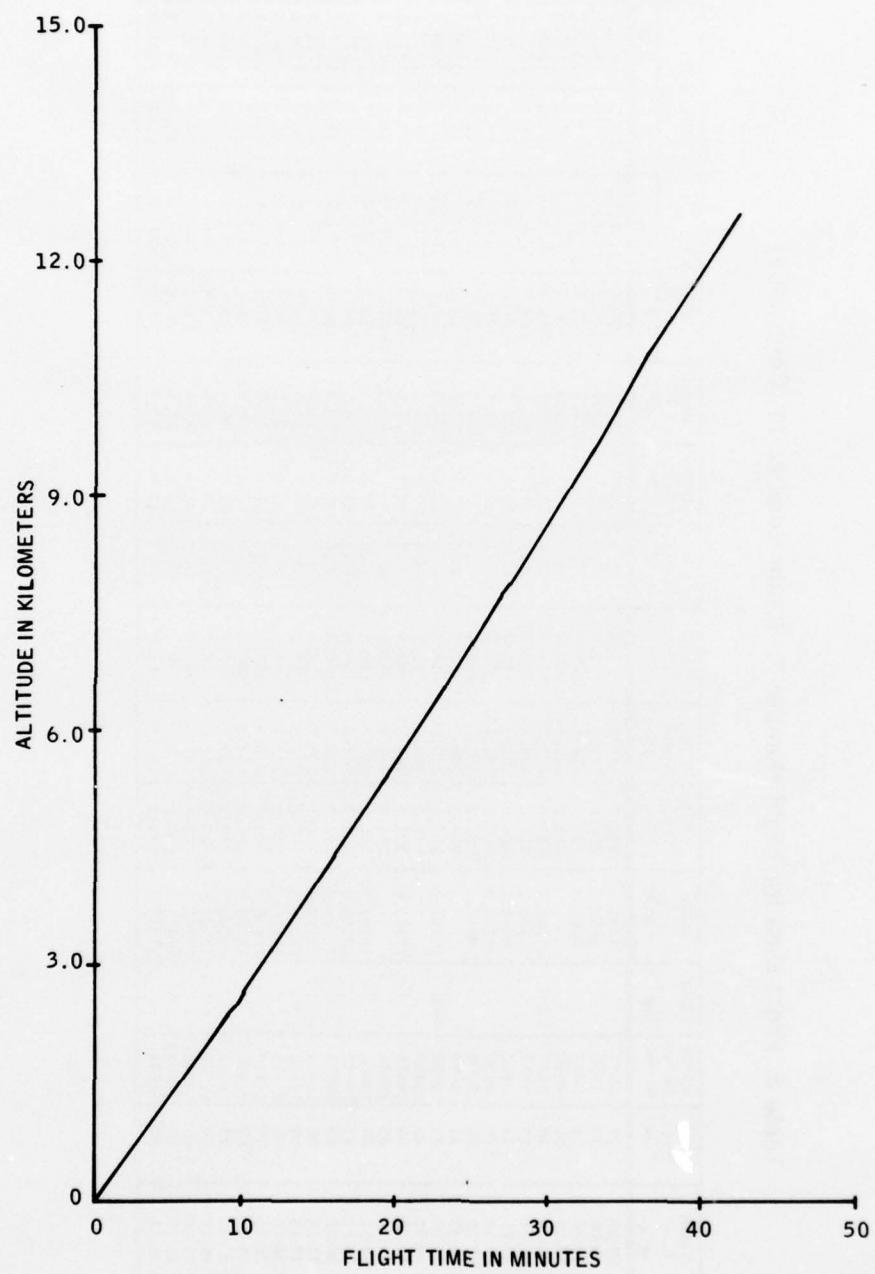

**Figure 9. Plot of Altitude versus Time Measured with Mini-Refraction Sonde — Flight Number 1**

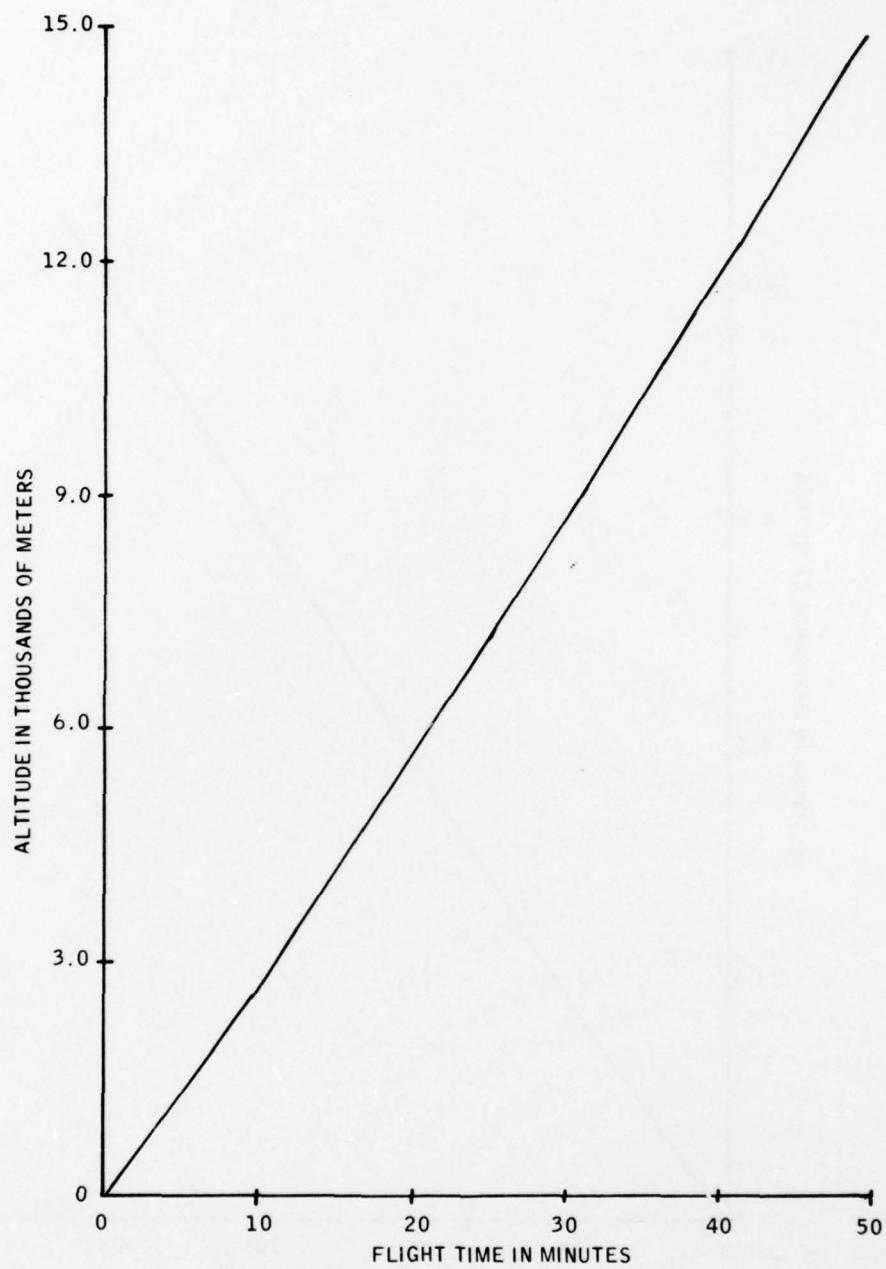

**Figure 10. Plot of Altitude versus Time Measured with NWS Rawinsonde — Flight Number 1**

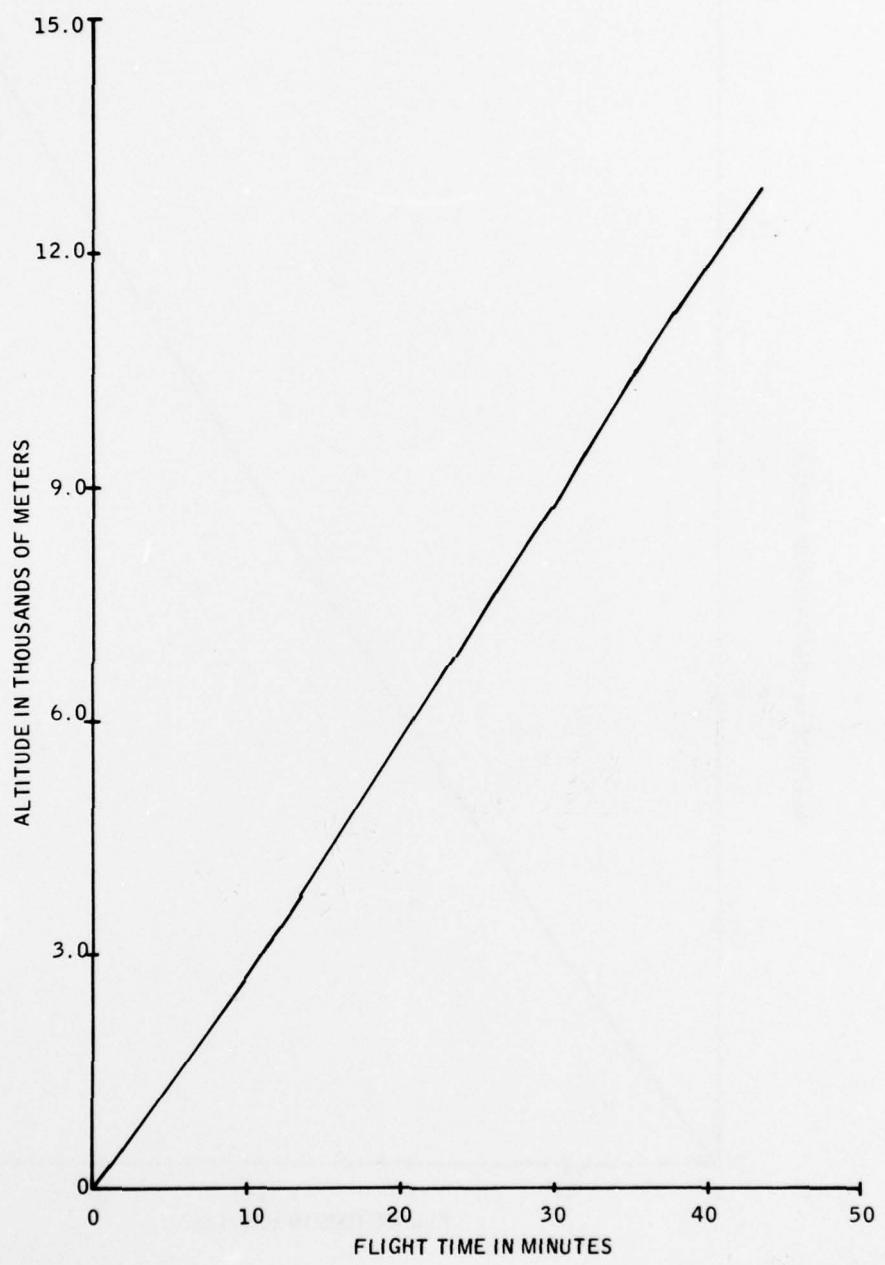


Figure 11. Plot of Altitude versus Time Measured with NASA Radar — Flight Number 1

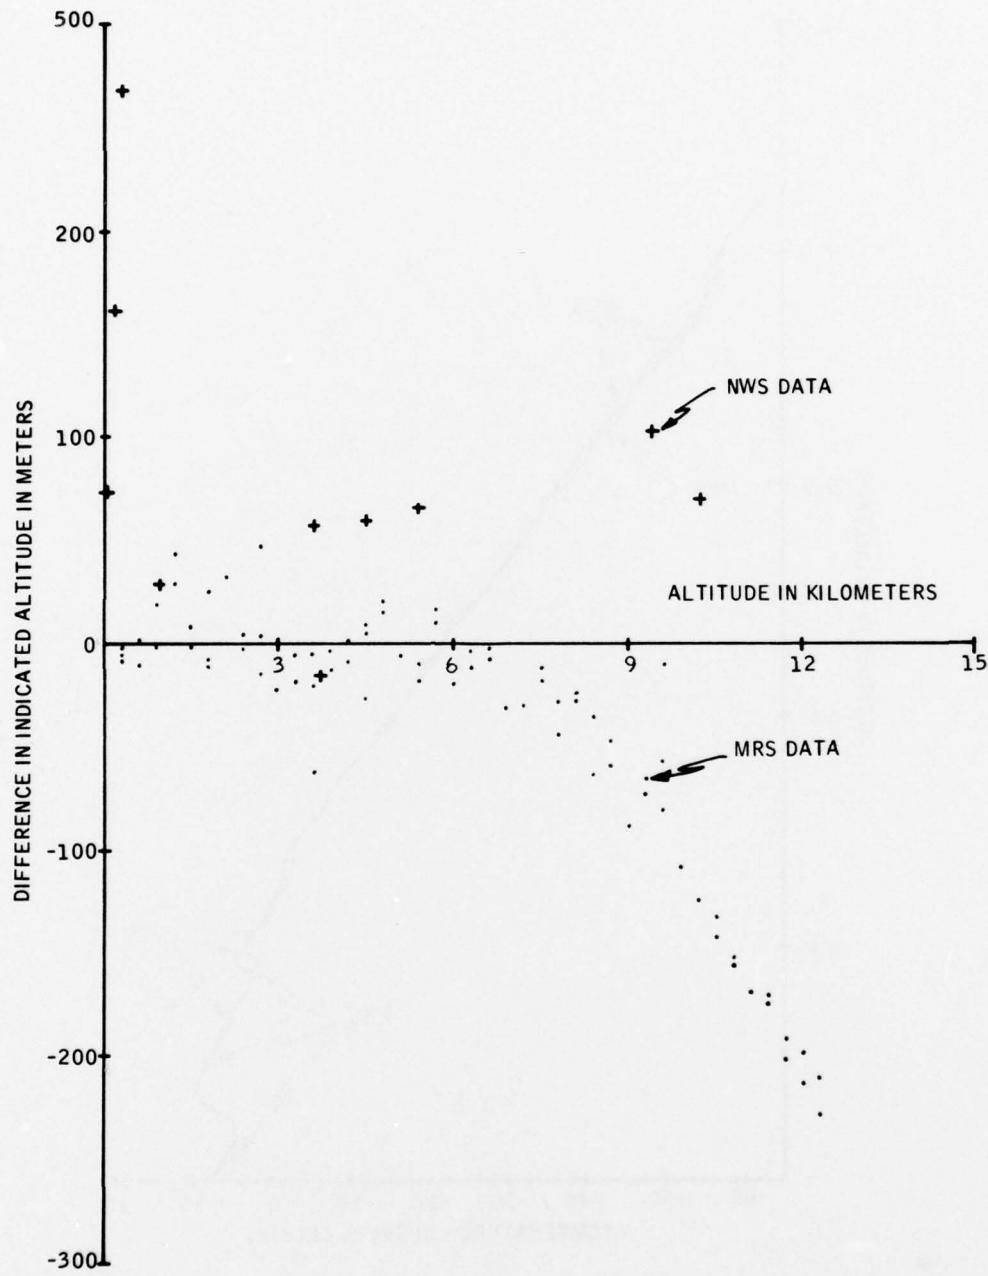


Figure 12. Plot of Difference in Altitude Reading of the MRS and Rawinsonde versus Radar — Flight Number 1

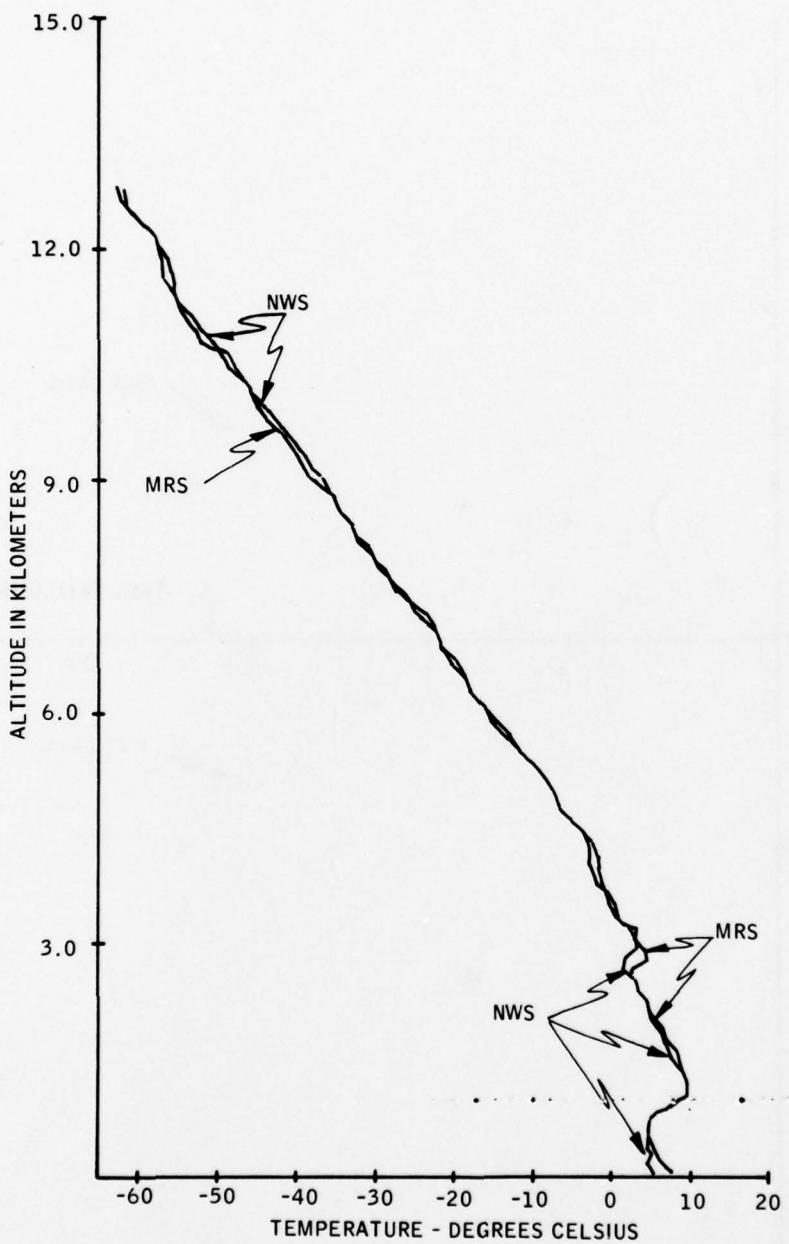


Figure 13. Plot of Free-Air Temperature versus Altitude for the MRS and Rawinsonde — Flight Number 1


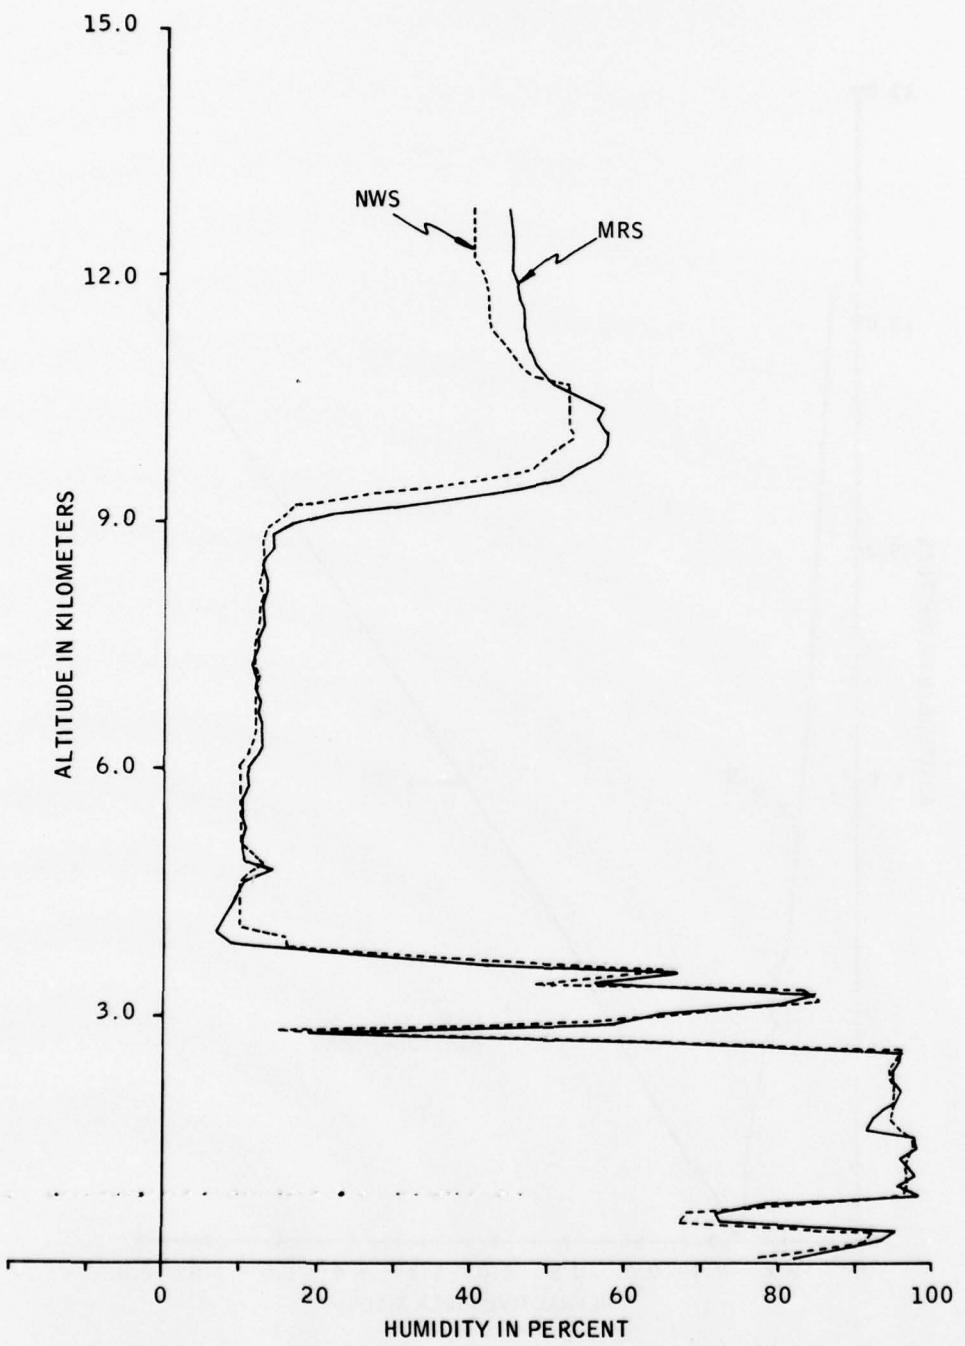


Figure 14. Plot of Relative Humidity versus Altitude for the MRS and Rawinsonde — Flight Number 1

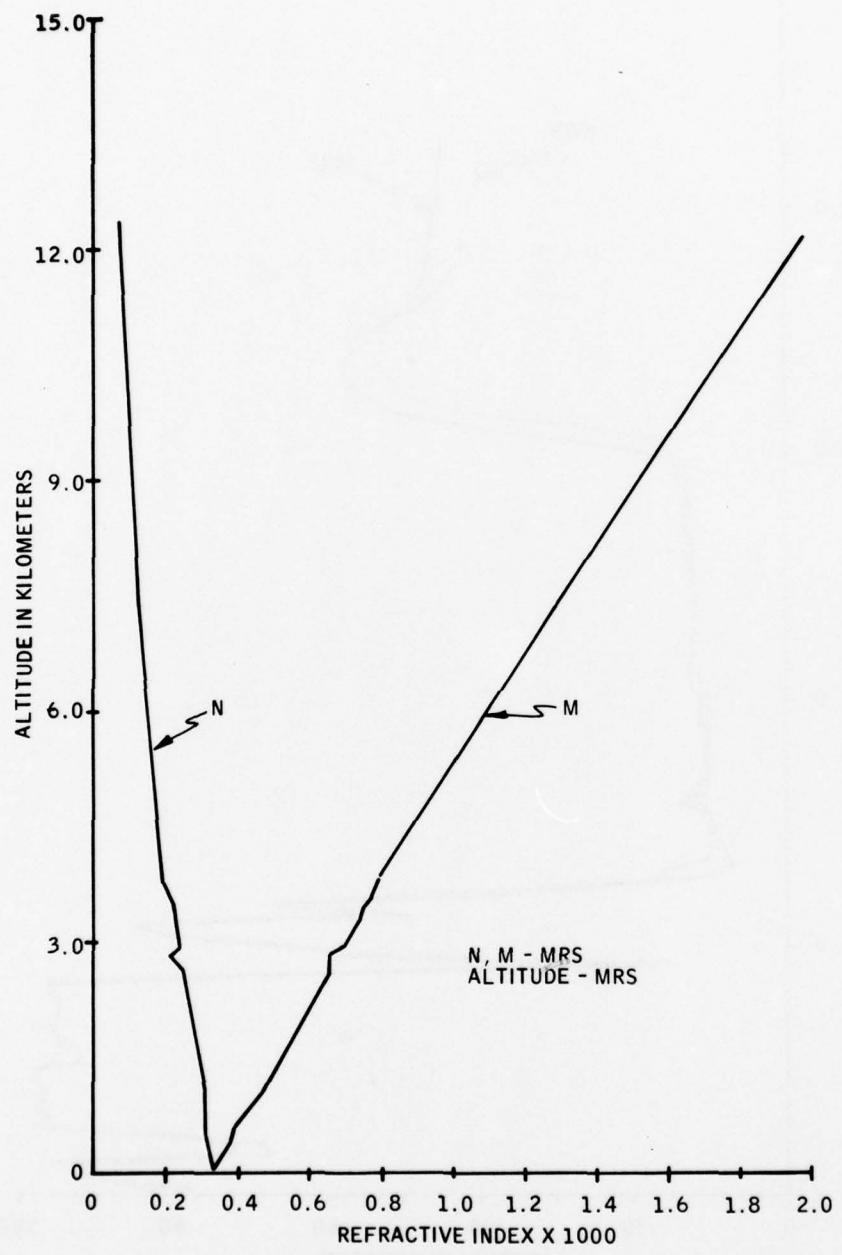

**Figure 15.** Plot of Modified Refractive Index, N, and M-Units versus Altitude Read by Mini-Refraction Sonde — Flight Number 1

## B. FLIGHT NUMBER TWO

A listing of all the flight number 2 data is shown in Table 3. The flight was an ozone-Rawinsonde sounding which inserted ozone readings into the Rawinsonde data stream. These periodic interruptions to the regular barometric commutation made it impossible to exactly correlate the Rawinsonde pressure readings with the Mini-Refraction Sonde readings. The rest of the columns are as described in Table 2. A separate listing of Rawinsonde altitude versus radar-tracked altitude is shown in Table 4.

Plots of altitude versus time are shown in Figures 16 through 18 for the MRS, NWS and radar. These plots are very close, as can be seen from the data in Tables 3 and 4.

A plot of measured free-air temperature versus altitude for the Rawinsonde and MRS is shown in Figure 19. The Mini-Refraction Sonde is reading about 3°C higher in temperature than the Rawinsonde. Both indicate the same temperature trend and show a small inversion at 2800 meters. This offset could be caused by self-heating or a thermal lag in the MRS thermistor mounting chamber. It could also be due to a calibration error in one of the thermistors.

The measured humidity profile is plotted in Figure 20. Although the trend of the curves agrees well, the Rawinsonde indicates significantly lower humidities when reading less than 33 percent. At these humidities, the carbon hygristor has minimum resistance. Possibly the MRS hygristor mount was not making good contact with the hygristor. The mounts could be gold- or silver-plated in future models. It is also possible that the hygristor was damaged while being inserted due to operator inexperience.

The modified refractive index, N, and M-units are plotted versus altitude in Figure 21. The curves are almost straight, indicating no significant ducting.

**Table 3. Flight Data for Flight Number 2, Sonde Number 10**

Time GMT H M S	Time To + M S	NWS Baro. Cont.	NASA Radar Alt - M	MRS Alt - M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	NWS R.H. %	MRS R.H. %	NWS Refr. Index N	MRS Refr. Index N	MRS Refr. Index M
15:20:21	00:36	5			123.9	1012.2	1010.5	12.0	90.3		333.3	352.1	
:	:	6			1000.6	998.7		13.5	91.4		334.8	378.2	
:	:	7			304.8	988.8	987.9	13.2	90.4		330.3	378.5	
:	:	8			403.0	977.6	976.8	13.1	90.4		326.9	389.6	
:	:				506.7	966.0	964.9	12.7	90.5		322.8	401.3	
15:22:15	02:30	10				966.0	964.9	12.6	90.3		320.8	413.8	
15:22:39	02:54	11			692	955.2	954.2	13.1	90.3		323.4	431.0	
:	:	12				943.6	943.8	14.9	90.7		319.9	443.8	
:	:	13				932.8	932.0	14.8	90.6		315.1	454.9	
:	:	14				921.6	920.5	14.2	90.6		312.0	464.5	
15:24:21	04:36	15				900.9	900.9	14.1	90.4		307.1	477.3	
:	:	16				889.0	889.0	13.5	90.4		302.2	486.9	
:	:	17				878.2	879.3	12.7	90.5		298.3	496.7	
:	:	18				867.6	866.9	12.2	90.6		292.7	509.1	
:	:	19				856.5	856.6	11.4	90.4		288.5	521.5	
15:25:57	06:12	20				846.4	845.7	10.9	90.6		284.6	532.2	
:	:	21				835.6	834.8	10.4	90.6		284.5	543.2	
:	:	22				825.6	824.4	9.4	90.7		279.3	543.2	
:	:	23				815.2	814.4	9.1	90.7		275.7	555.6	
:	:	24				805.0	804.2	8.3	90.7		271.4	566.5	
15:27:27	07:42	25				794.8	793.3	7.6	90.8		267.2	577.9	
:	:	26				784.0	783.5	6.6	90.8		262.3	589.9	
:	:	27				774.0	772.7	6.2	90.8		258.9	602.2	
:	:	28				764.4	764.4	5.8	90.9		255.1	615.8	
:	:	29				754.2	752.7	5.2	91.0		251.8	625.8	
15:28:42	08:57	30				744.4	742.4	4.6	91.0		247.6	640.8	
:	:	31				734.6	733.0	4.2	91.1		244.2	654.7	
15:29:03	09:18	32				725.0	725.0	3.0	91.7		225.2	650.5	
15:29:51	10:06					2880.8	2886.6	3.8	91.3		215.6	657.7	
:	:	*33				2997.7	3129.1	7.7	49.4		222.3	682.0	
:	:	*34				3129.1	3228.7	7.05	31.9		210.0	690.4	
15:31:24	11:39	35				696.0	694.0	6.7	30.1		206.4	703.7	
:	:	36				686.2	685.0	5.8	39.4		208.0	721.7	
:	:	*37				676.8	675.4	5.5	33.2		202.5	733.7	
:	:	*38				665.6	667.2	4.7	33.4		199.7	748.8	

**Table 3. Flight Data for Flight Number 2, Sonde Number 10 (Continued)**

Time GMT H M S	Time To + M S	NWS Baro Cont.	NASA Radar Alt - M	NWS Alt - M	MRS Alt - M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	NWS R. H. %	MRS R. H. %	NWS Refr. Index	MRS Refr. Index
:	13:33	39		3697.6	657.8	656.5		4.0		29.9		195.6	761.5
:	:	40		3824.3	648.8	646.8		3.1		29.8		192.8	776.5
:	:	41		3913.5	639.6	638.6		2.6		28.3		190.0	789.2
:	:	42		4047.8	630.4	628.5		2.5		30.7		188.0	807.4
:	:			4161.9	621.4	619.9		1.5		32.1		186.0	821.8
:	:			4268.8	612.4	611.1		0.6		31.9		183.4	836.0
:	:			4406.0	603.2	601.3		-0.2		31.2		180.3	852.4
:	:			4506.7	594.2	594.1		-0.5		29.5		177.8	864.6
:	:			4647.4	585.4	583.5		-0.9		30.8		175.2	884.2
:	:			4755.9	577.0	575.0		-1.4		29.0		172.3	898.9
:	:			4859.3	568.4	566.5		-1.9		29.1		169.9	914.6
:	:			5013.6	559.6	556.4		-3.1		29.2		167.1	932.7
:	:			5150.6	551.2	548.3		-4.0		31.0		165.3	948.1
:	:			5243.0	542.4	541.1		-4.7		30.5		163.2	961.3
:	:			5366.6	534.2	532.9		-5.3		31.9		161.2	977.4
:	:			5488.8	525.8	525.0		-6.4		31.5		159.0	992.3
:	:			5643.3	517.4	514.4		-7.6		31.8		156.1	1012.8
:	:			5774.7	509.2	506.0		-8.3		29.3		153.3	1029.2
:	:			5889.9	501.2	498.7		-8.4		28.4		151.1	1044.7
:	:			5981.0	493.0	492.5		-9.1		28.8		149.5	1057.7
:	:			6101.3	485.0	484.7		-9.8		31.5		147.8	1074.3
:	:			6258.2	477.0	476.0		-10.8		35.9		146.0	1093.3
:	:			6292	469.0	467.3	-15.5	-11.7		45.1		144.8	1113.3
:	:			6531.9	460.2	458.3		-13.0		58.5		143.9	1134.1
:	:			6651.6	452.6	451.2		-14.0		68.0		142.9	1150.5
:	:			6797.5	444.8	442.5		-15.2		76.3		141.1	1170.2
:	:			6927.3	437.2	435.0		-15.4		83.4		139.6	1189.2
:	:			6942	7084.9	429.6	426.0	-19.4	-16.2	53.5		133.9	1207.2
:	:			6942	7196.0	422.2	419.9	-15.6	-15.6	47.8		131.4	1223.6
:	:			7311.9	414.8	413.0		-15.8		48.1		128.4	1241.6
:	:			7443.5	408.0	406.7		-16.2		39.5		126.7	1256.6
:	:			7576.6	400.6	399.1		-17.6		38.6		124.6	1274.6
:	:			7695.1	393.2	392.6		-18.2		37.1		122.6	1291.2
:	:			7839.4	386.2	385.3		-18.8		35.3		120.4	1310.4

**Table 3. Flight Data for Flight Number 2, Sonde Number 10 (Concluded)**

Time GMT H M S	Time To + M S	NWS Baro Cont.	NASA Radar Alt - M	NWS Alt - M	MRS Alt - M	NWS Press. mb	MRS Press. mb	NWS Temp °C	MRS Temp °C	NWS R.H. %	MRS R.H. %	NWS Refr. Index	MRS Refr. Index
:	:	73	8140.5	7731.1	379.0	377.0	369.6	-20.0	-21.8	33.2	118.0	1331.8	
:	74	8299.6	7997.4	3655.2	362.5	365.2	362.5	-22.4	-22.4	35.3	116.3	1350.1	
:	75	8426.1	8115.9	358.6	355.8	358.6	355.8	-24.0	-24.0	36.5	114.4	1370.0	
:	76	8560.1	8244.2	351.6	349.5	351.6	349.5	-24.6	-24.6	37.9	112.8	1387.0	
:	77	8691.9	8363.8	345.0	343.2	345.0	343.2	-25.8	-25.8	34.8	110.8	1405.2	
:	78	8846.6	8508.5	338.2	335.9	338.2	335.9	-26.9	-26.9	35.9	109.3	1422.4	
:	79	8978.7	8625.8	332.0	329.7	332.0	329.7	-28.5	-28.5	35.9	109.3	1422.4	
30:57	80	9080.3	8722.5	325.4	325.0	325.4	325.0	-29.2	-29.2	36.2	105.9	1460.1	
:	81	9258.4	8889.8	319.0	317.0	319.0	317.0	-30.4	-30.4	38.8	104.7	1474.1	
:	82	9402.8	9027.7	312.6	310.4	312.6	310.4	-31.7	-31.7	36.9	102.5	1498.2	
:	83	9539.3	9173.8	306.2	304.1	9539.3	9173.8	-32.2	-32.2	36.2	100.7	1518.1	
:	84	9692.0	9306.4	300.4	298.1	9692.0	9306.4	-33.2	-33.2	33.8	98.8	1538.1	
:	85	9848.6	9437.5	294.0	291.6	9848.6	9437.5	-34.6	-34.6	34.6	97.2	1558.3	
:	86	9984.9	9567.8	288.2	285.8	9984.9	9567.8	-35.1	-35.1	39.6	95.8	1577.5	
:	87	10145.1	9712.7	282.2	279.4	10145.1	9712.7	-36.1	-36.1	45.5	94.4	1596.6	
:	88	10232.9	9808.2	276.4	275.5	10232.9	9808.2	-37.5	-37.5	45.8	92.7	1617.6	
:	89	10403.2	9945.7	270.6	269.1	10403.2	9945.7	-38.0	-38.0	44.5	91.6	1631.5	
35:12	90	10559.1	10093.7	264.8	263.0	10559.1	10093.7	-39.9	-39.9	44.8	90.1	1651.6	
:	91	10716.3	10240.4	259.2	257.1	10716.3	10240.4	-41.0	-41.0	45.8	88.4	1673.2	
:	92	10869.0	10391.4	253.6	251.1	10869.0	10391.4	-42.0	-42.0	44.4	86.8	1694.5	
:	93	11000.8	10496.7	248.0	246.8	11000.8	10496.7	-43.2	-43.2	43.2	85.1	1716.6	
:	94	11161.3	10663.3	242.6	240.5	11161.3	10663.3	-45.4	-45.4	44.3	84.0	1732.0	
38:06	95	11388.0	10805.8	237.2	236.0	11388.0	10805.8	-45.2	-45.2	39.0	82.3	1756.4	
:	96	:	:								80.6	1777.2	

**Table 4. Flight Data for Flight Number 2. Sonde Number 10**

Time GMT H M S	Time T <sub>o</sub> M S	NWS Baro Cont.	NASA Radar ALT-M	NWS ALT-M	MRS ALT-M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	NWS Refr. Index			MRS Refr. Index		
										NWS R.H. %	MRS R.H. %	N	M	N	M
15:19:45	00:00	3.9	-	4	209	1024.9	1000.0	9.4	10.0						
15:20:39	00:54	6.05	-		692	944.0	944.0	10.9	91.7						
15:22:39	02:54	11.0	-		1568	850.0	850.0	12.6	92.2						
15:25:51	06:06	19.65			2691	741.0	741.0	8.3	92.3						
15:28:45	09:00	30.3	2675	2758	2756	735.0	735.0	1.8	93.4						
15:29:03	08:18	31.0	2898	2898	2866	725.0	725.0	-2.2	38.0						
15:29:51	10:06	32.0	3176	3151	700.0	700.0	700.0	3.8	26.5						
15:31:09	11:24	34.57	584.7	580.6	500.0	469.0	469.0	4.3	<10.0						
15:40:39	20:54	57.15	6331	6292	490.0	443.0	443.0	-12.1	<10.0						
15:42:09	22:24	61.0	6754	6721	443.0	443.0	443.0	-15.5	22.5						
15:43:27	23:42	64.3	7029	6942	430.0	430.0	430.0	-18.6	73.2						
15:44:21	24:36	66.0	7519	7478	400.0	400.0	400.0	-19.4	17.5						
15:46:03	26:18	70.08	9589	9531	300.0	300.0	300.0	-21.3	15.0						
15:53:03	33:18	85.06	10813	10762	250.0	250.0	250.0	-37.7	12.5						
15:57:09	37:24	93.64	12241	12202	200.0	200.0	200.0	-47.7	10.0						
16:01:57	42:12	103.28	13688	13688	157.0	157.0	157.0	-58.1	10.0						
16:06:33	46:48	112.9	-	13961	150.0	150.0	150.0	-69.2	10.0						
16:07:21	47:36	114.6	-	14996	126.0	126.0	126.0	-72.3	10.0						
16:10:39	50:54	120.8	-												

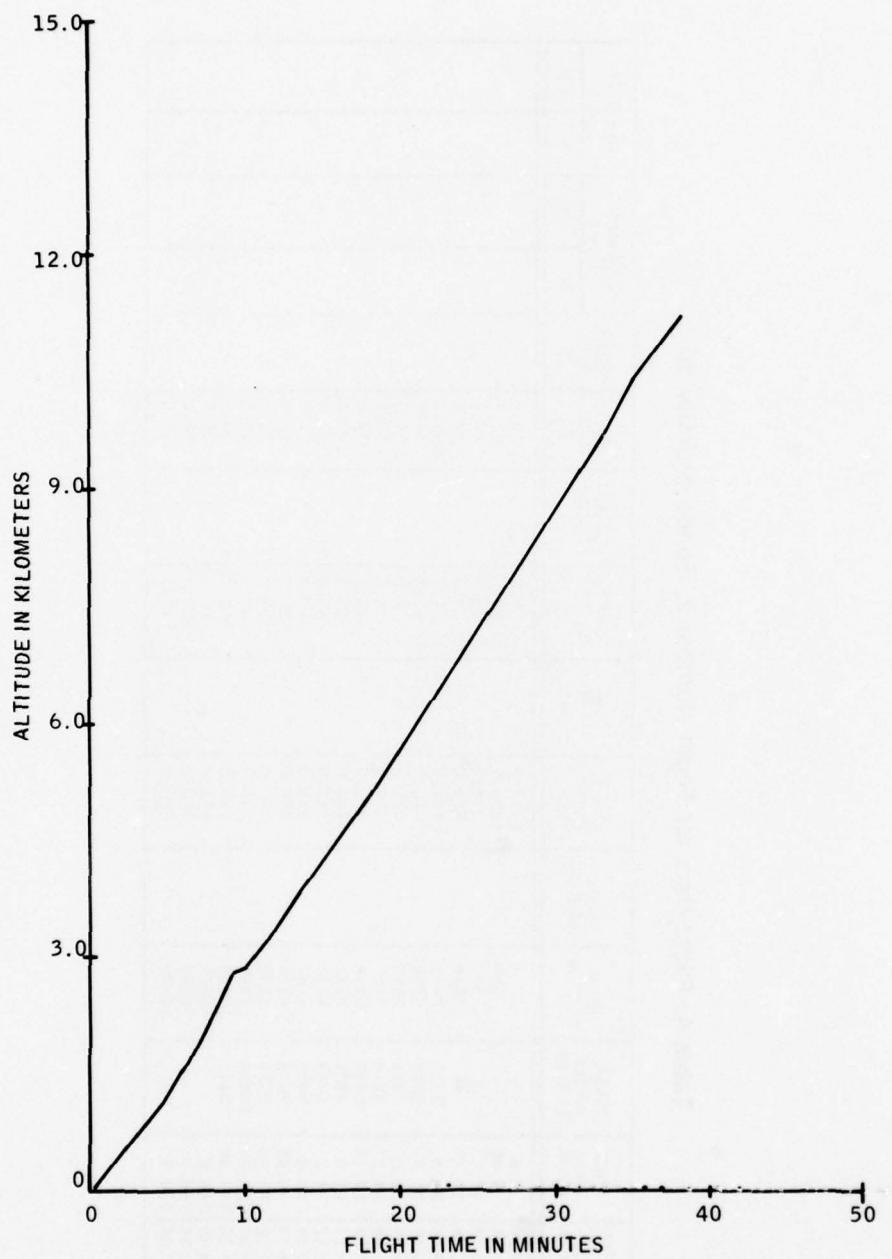


Figure 16. Plot of Altitude versus Time Measured with Mini-Refraction Sonde — Flight Number 2

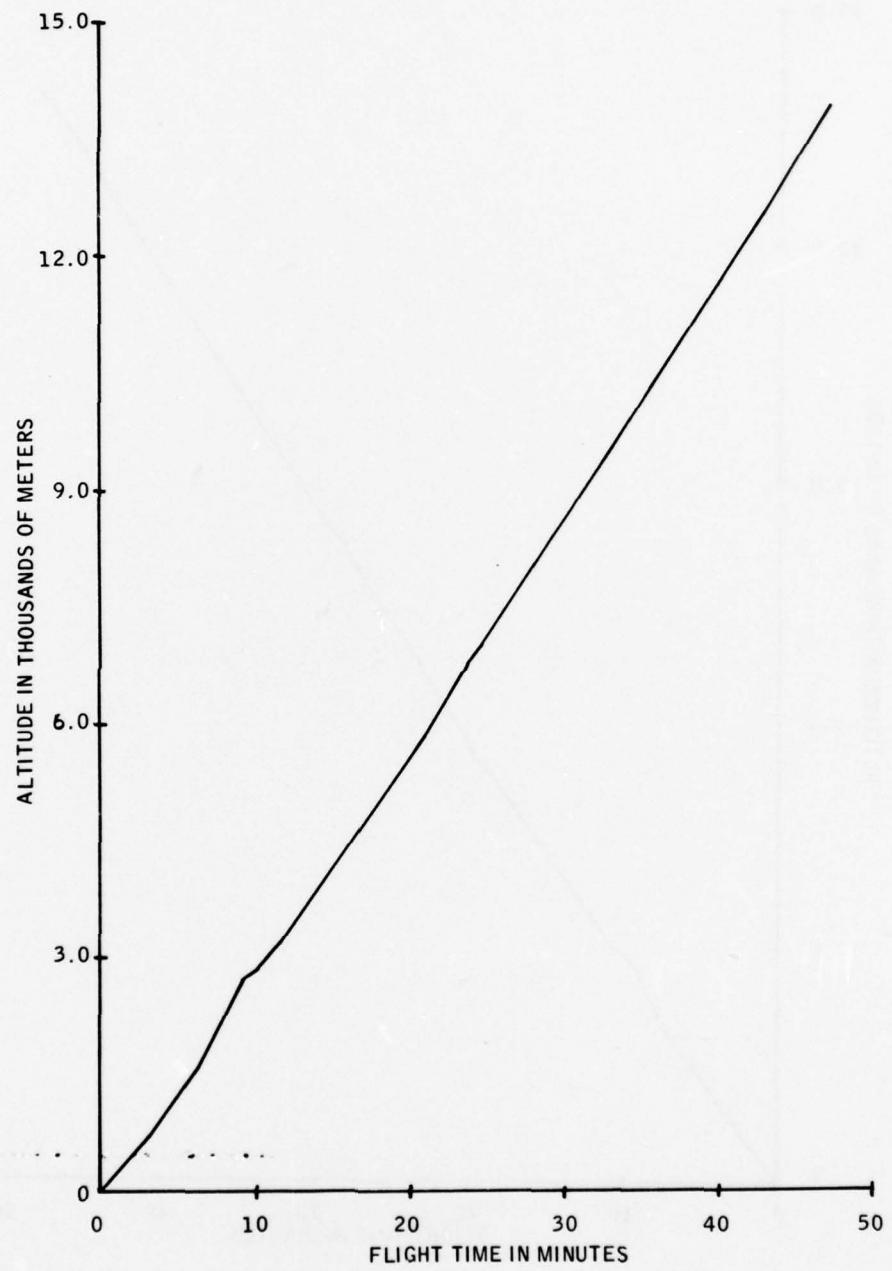


Figure 17. Plot of Altitude versus Time Measured with NWS Rawinsonde — Flight Number 2

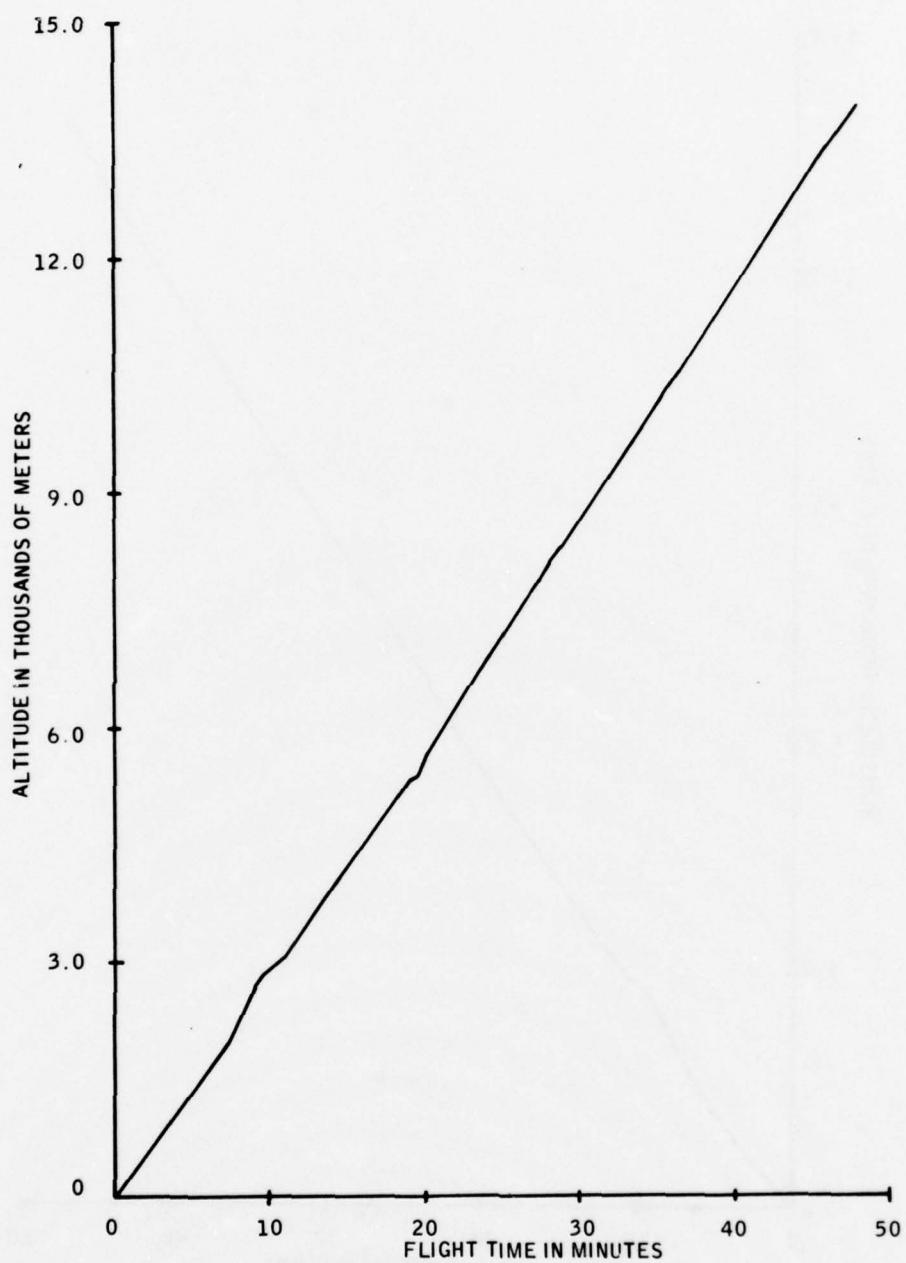


Figure 18. Plot of Altitude versus Time Measured with NASA Radar — Flight Number 2

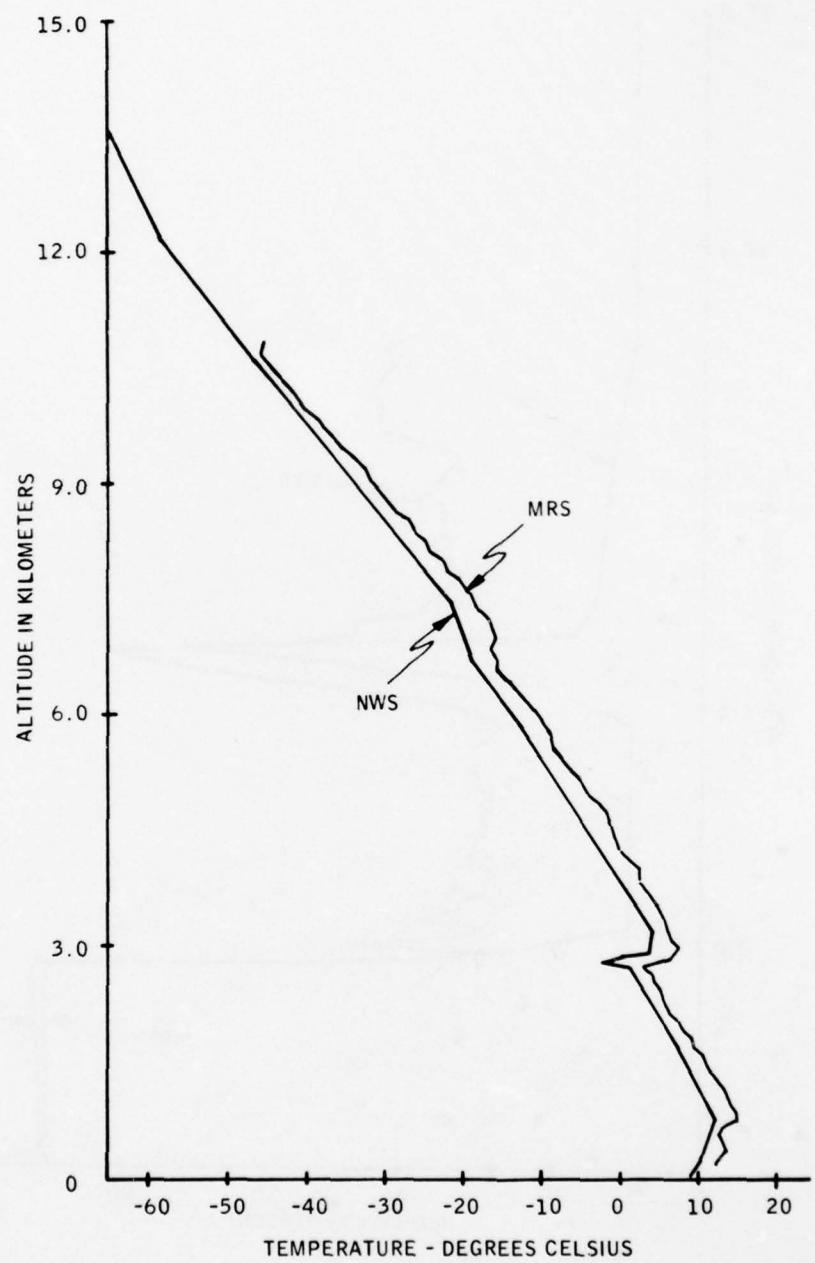


Figure 19. Plot of Free-Air Temperature versus Altitude for the MRS and Rawinsonde — Flight Number 2

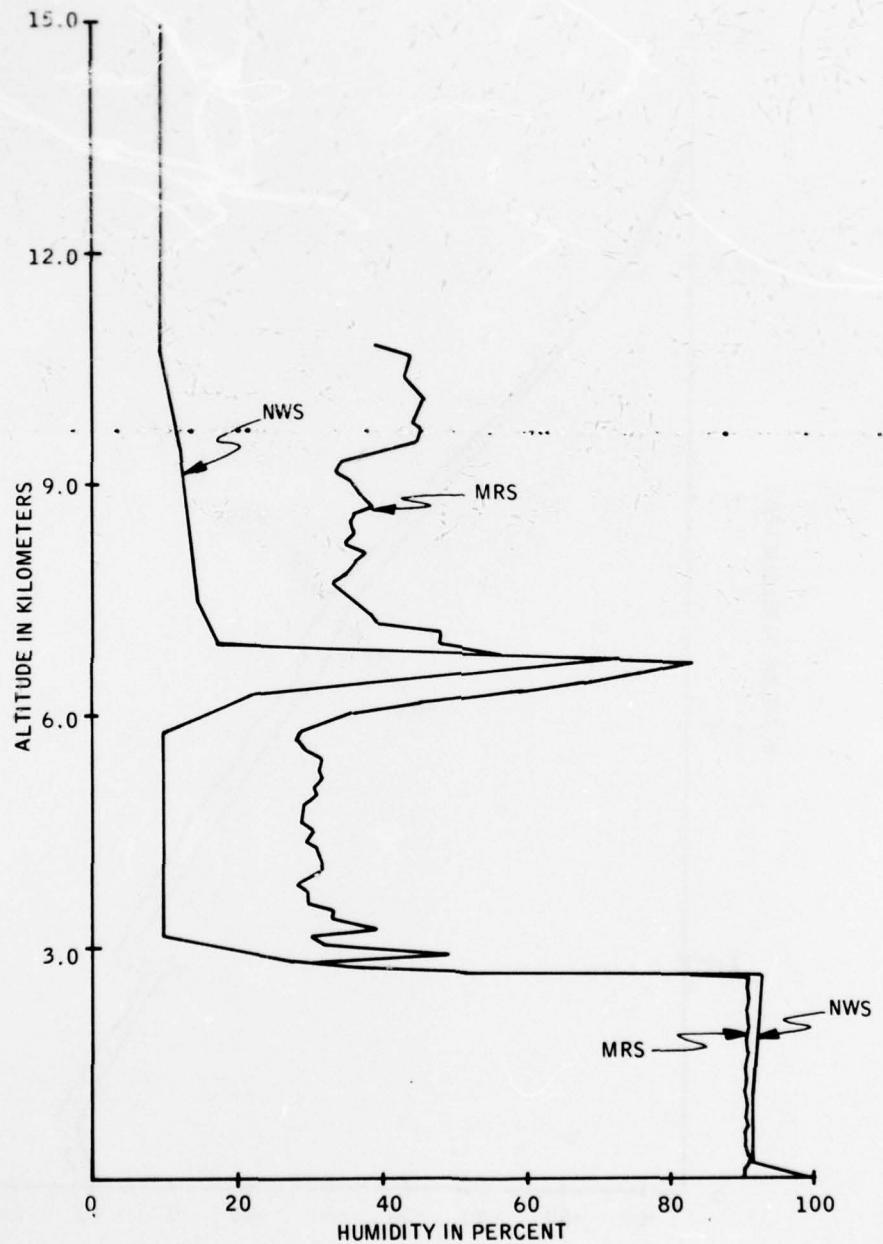


Figure 20. Plot of Relative Humidity versus Altitude for the MRS and Rawinsonde — Flight Number 2

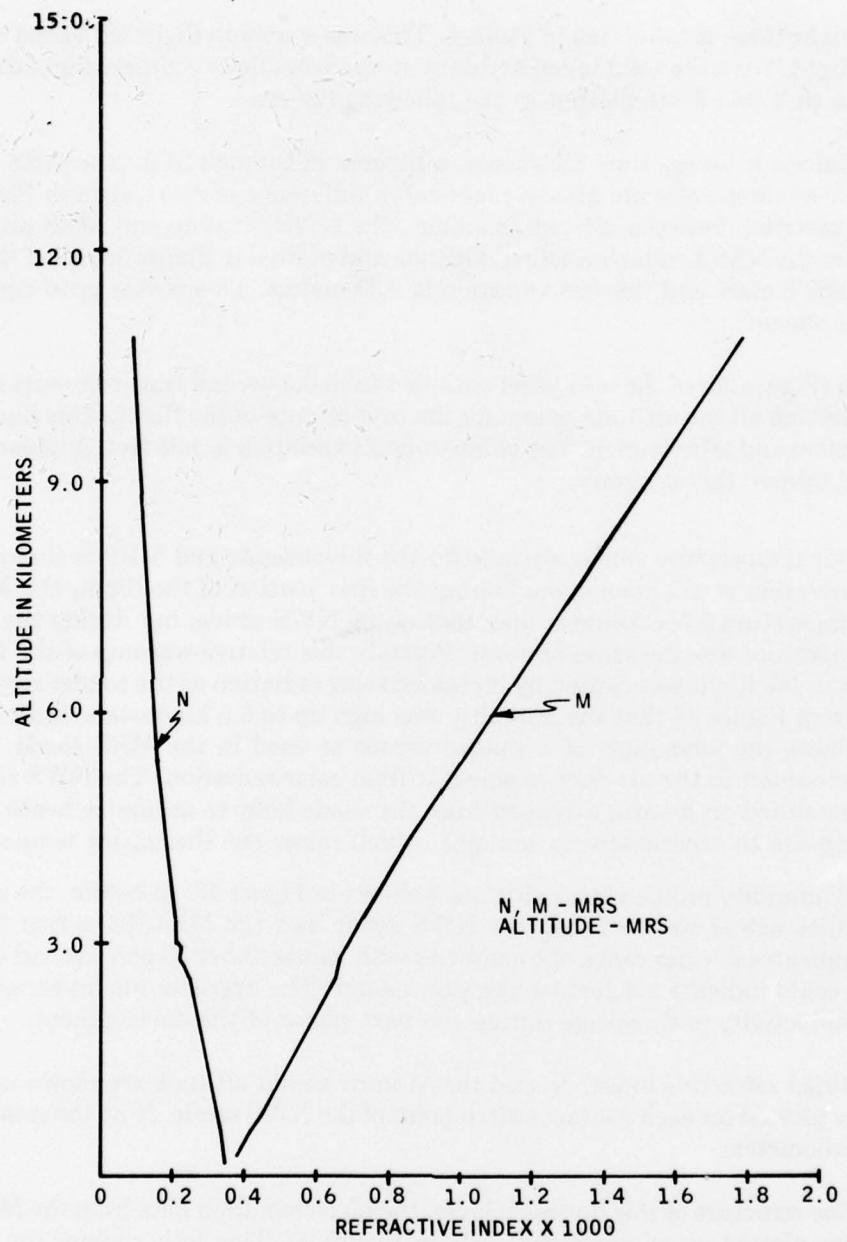


Figure 21. Plot of Modified Refractive Index, N, and M-Units versus Altitude Read by Mini-Refraction Sonde — Flight Number 2

### C. FLIGHT NUMBER THREE

The data for flight three is tabulated in Table 5. This was a smooth flight with good data reception over the flight. With the solid telemetry data, it was possible to compare flight data closely. All of the data in Table 5 are plotted in the following figures.

Plots of sonde altitude versus time are shown in Figures 22 through 24 for the MRS, NWS and radar. Since these three plots are almost identical, a difference plot is shown in Figure 25. To illustrate the variation between altitude readings, the NWS altitude and MRS altitude were subtracted from the NASA radar-measured altitude and plotted in Figure 25. All of the readings agree within  $\pm 50$  meters and the rms variation is  $\pm 30$  meters. This is very good agreement on altitude measurement.

An illustration (Figure 26) of the resolution obtained from 0.4-second time commutation of data is shown by plotting all the altitude points for the first minute of the flight. This illustrates the data scatter before and after launch. The point-to-point variation is  $\pm 35$  feet. A linear regression curve fit will improve this accuracy.

A plot of free-air temperature versus altitude for the Rawinsonde and MRS is shown in Figure 27. Note the inversion at 1.5 kilometers. During the first portion of the flight, the MRS sonde indicated a temperature  $2.5^{\circ}\text{C}$  warmer than that of the NWS sonde, but during the rest of the flight the temperature was the same or lower. Possibly this relative warmup of the NWS measurement later in the flight was caused by increased solar radiation as the sondes rose above the clouds. Note from Figure 28 that the humidity was high up to 6.5 kilometers, indicating cloud layers. This shows the advantage of a shaded sensor as used in the MRS sonde. The MRS thermistor is mounted in the air duct to shield it from solar radiation. The NWS Rawinsonde thermistor is mounted on an arm extended from the sonde body to minimize heating from the sonde. This exposes the thermistor to sunlight, which raises the thermistor temperature.

The measured humidity profile versus altitude is shown in Figure 28. As before, the shape of the humidity profiles agrees well between the NWS sonde and the Mini-Refraction Sonde. The NWS sonde indicates a wider range of humidities with values above 90 percent and less than 20 percent. This could indicate a defective hygristor mount. The hygristor mount should be investigated for conductivity and leakage during the next phase of the development.

A plot of modified refractive index,  $N$ , and the M-units versus altitude are shown in Figure 29. The values are plotted for each contact switch point of the NWS sonde. Note the small inversion layer at two kilometers.

To show the fine structure of this inversion layer, the high resolution data from the Mini-Refraction Sonde was plotted on an expanded scale in Figure 30. This fully defines the layer.

**Table 5. Flight Data for Flight Number 3, Sonde Number 9**


Time GMT H M S	Time T <sub>o</sub> M S	NWS Baro. Cont.	NASA Radar ALT-M	NWS ALT-M	MRS ALT-M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	NWS R.H. %	MRS R.H. %	NWS Refr. Index	MRS Refr. Index	
19:07:30	00:06	5			613.3	1015.0	1013.6	11.2	13.7	90.2	343.8	353.8	338.4	
19:07:57	00:03	6	-		153.8	1001.8	1002.8	12.5	14.3	91.2	342.7	366.8	338.0	
19:08:21	00:57	7	-		266.7	990.2	990.0	12.8	14.6	91.3	340.3	381.4	335.4	
19:08:45	01:21	8	-		360.4	977.4	977.7	12.5	14.5	91.4	336.8	393.4	331.9	
19:09:09	01:45	9	-		467.7	966.0	966.3	13.0	14.9	91.8	335.2	408.8	330.2	
19:09:36	02:12	10	-		563.2	954.4	954.8	13.0	14.9	-	91.4	331.7	420.8	
19:10:00	02:36	11	-	670	664.9	943.2	943.3	13.2	15.0	91.5	328.8	434.0	324.2	
19:10:24	03:00	12	-		777.9	932.0	932.0	13.2	14.9	91.5	326.1	447.3	321.1	
19:10:48	03:24	13	-		874.7	920.6	920.9	12.8	14.8	91.6	322.0	458.9	317.6	
19:11:09	03:45	14	-		973.5	909.6	910.4	12.0	14.2	91.8	317.2	469.1	312.9	
19:11:33	04:09	15	-		1070.9	898.4	898.4	11.3	13.4	-	91.1	315.0	480.3	
19:11:57	04:33	16	-		1185.0	887.2	887.5	10.4	12.8	96.0	305.6	490.8	302.1	
19:12:21	04:57	17	-		1290.7	876.2	876.8	9.5	12.2	94.8	300.2	501.1	296.5	
19:12:42	05:18	18	-		1393.9	865.0	865.7	9.2	11.4	95.0	295.4	512.8	292.1	
19:13:06	05:42	19	-		1502.2	854.0	854.9	8.3	10.8	97.5	292.1	525.7	287.6	
19:13:30	06:06	20	1604		1581.7	843.6	844.5	7.5	10.0	-	89.9	280.5	529.8	283.0
19:13:54	06:30	21	1719		1703.9	833.0	833.9	6.2	9.7	73.5	74.9	353.5	270.8	531.1
19:14:15	06:51	22	1821		1802.9	822.2	823.2	5.9	9.5	63.0	68.3	260.8	543.0	540.6
19:14:39	07:15	23	1933		1937.7	811.8	811.9	6.2	10.3	36.0	49.0	243.2	543.8	545.7
19:15:00	07:36	24	2014		2019.9	801.4	802.4	7.6	10.8	37.0	45.6	241.3	558.3	546.9
19:15:24	08:00	25	2128		2138.4	791.0	792.1	8.3	10.7	-	63.9	256.7	590.1	516.5
19:15:48	08:24	26	2236		2246.1	780.8	781.9	8.5	10.8	97.5	92.6	272.1	623.1	581.6
19:16:15	08:51	27	2353		2347.4	770.6	771.6	7.9	10.3	98.3	93.7	268.4	636.4	628.6
19:16:39	09:15	28	2452		7458.4	760.4	762.0	7.6	10.1	97.3	92.8	264.4	648.7	626.2
19:17:03	09:39	29	2568		2572.5	750.4	751.9	7.0	9.5	96.3	92.2	259.8	661.2	650.9
19:17:27	10:03	30	2690		2668.6	740.6	742.1	6.5	8.7	-	92.9	255.5	673.5	653.2
19:17:51	10:27	31	2797		2804.0	730.8	732.0	5.7	8.2	97.0	93.0	251.6	687.0	676.4
19:18:18	10:54	32	2921		2929.3	720.8	722.8	5.0	7.7	97.2	93.0	247.4	700.1	688.6
19:18:45	11:21	33	3055		3037.0	711.0	711.2	4.2	7.0	96.9	92.8	243.1	715.2	704.0
19:19:06	11:42	34	3163		3153.4	701.2	701.2	3.7	6.2	88.7	88.1	235.0	724.6	714.8
19:19:30	12:06	35	3283		3276.9	691.6	691.0	3.2	5.6	-	86.9	231.0	739.1	720.4
19:19:57	12:33	36	3410		3375.0	682.2	682.3	2.3	5.1	88.3	86.9	227.5	751.5	740.8
19:20:21	12:57	37	3512		3493.6	673.0	672.4	1.6	4.2	95.6	85.9	188.3	729.4	722.6
19:20:45	13:21	38	3624		3608.7	663.4	662.3	0.8	3.7	97.8	93.7	223.7	785.2	772.3

**Table 5. Flight Data for Flight Number 3, Sonde Number 9 (Continued)**


Time GMT H M S	Time T <sub>o</sub> M S	NWS Baro. Cont.	NASA Radar ALT-M	MRS ALT-M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	NWS R.H. %	MRS R.H. %	NWS Index	MRS Index	NWS Refr.	MRS Refr.	
19:21:09	13:45	39	3733	3727.1	654.2	653.4	0.2	3.1	96.5	92.7	219.5	797.8	218.2	784.9	
19:21:33	14:09	40	3828	3949	644.2	645.2	0	2.7	-	83.9	214.7	822.4	211.9	795.3	
19:22:00	14:36	41	3949	3957.0	635.8	635.1	-0.6	2.0	87.9	86.1	210.9	86.1	208.1	810.4	
19:22:24	15:00	42	4068	4074.4	626.6	626.0	-1.6	1.1	95.1	89.8	208.3	839.7	205.5	825.2	
19:22:48	15:24	43	4180	4192.8	617.8	617.2	-2.4	0.5	97.5	93.2	205.7	854.7	204.4	840.4	
19:23:15	15:51	44	4295	4399	609.0	610.1	-3.4	-0.3	96.8	93.0	201.8	869.3	201.4	850.9	
19:23:39	16:15	45	4399	4431.2	600.0	599.4	-4.0	-0.9	-	92.3	197.1	881.7	197.3	868.4	
19:24:06	16:42	46	4531	4484	591.2	590.6	-4.7	-1.6	86.8	87.9	192.5	895.1	192.9	881.5	
19:24:33	17:09	47	4658	4660.6	581.4	581.3	-5.0	-2.4	50.0	62.2	179.6	901.4	182.8	890.1	
19:24:57	17:33	48	4766	4772.6	573.0	572.9	-5.7	-2.9	83.8	78.4	185.6	925.4	184.2	909.2	
19:25:21	17:57	49	4871	4894.1	564.4	564.4	-6.7	-3.6	92.0	90.8	184.6	942.8	184.3	927.1	
19:25:51	18:27	50	5010	5026.7	556.0	556.3	-7.0	-4.0	-	94.3	182.6	959.4	182.4	943.0	
19:26:15	18:51	51	5126	5137.9	547.6	547.6	-7.6	-4.8	98.9	94.5	180.2	975.4	179.2	958.3	
19:26:42	19:18	52	5250	5252.0	539.4	539.3	-8.3	-5.4	99.4	94.5	177.4	991.1	176.4	973.7	
19:27:03	19:39	53	5345	5378.2	531.0	531.0	-8.7	-5.4	100.7	99.8	174.4	1006.6	173.4	988.7	
19:27:30	20:06	54	5490	5507.0	523.0	523.1	-9.3	-6.6	99.0	94.5	171.5	1022.0	170.8	1004.1	
19:27:57	20:33	55	5595	5625.7	515.0	515.2	-10.0	-7.5	-	94.3	168.5	1037.0	167.8	1018.8	
19:28:21	20:57	56	5714	5738.4	506.8	506.9	-10.7	-8.3	96.9	94.2	165.3	1053.3	164.9	1034.8	
19:28:48	21:24	57	5846	5862.1	499.0	499.2	-11.4	-8.8	94.4	93.7	162.3	1068.4	162.3	1050.1	
19:29:15	21:51	58	5970	5978.8	491.2	491.0	-11.7	-8.8	81.8	80.6	158.0	1084.3	157.6	1065.9	
19:29:42	22:18	59	6049	6105.5	483.4	483.7	-12.7	-9.6	82.3	80.6	155.4	1100.1	155.2	1080.5	
19:30:06	22:42	60	6223	6232.6	475.6	476.4	-13.5	-10.4	-	82.9	149.0	1110.8	153.1	1095.8	
19:30:30	23:06	61	6339	6305	6354.6	467.2	468.5	-14.1	-9.6	29.0	45.4	142.5	1127.0	145.1	1109.7
19:30:54	23:30	62	6466	6471.4	460.2	461.5	-14.9	-10.3	17.5	36.5	138.9	1140.7	141.7	1123.7	
19:31:21	23:57	63	6601	6574.6	453.0	454.1	-15.8	-11.2	15.0	34.7	136.6	1157.2	139.4	1139.5	
19:31:42	24:16	64	6697	6704.8	445.6	447.0	-16.7	-11.9	13.0	32.0	134.5	1173.6	137.0	1155.4	
19:32:09	24:45	65	6831	6854.1	437.4	439.3	-17.4	-12.9	-	31.0	132.6	1191.7	134.8	1172.5	
19:32:36	25:12	66	6990	6973.6	430.2	431.9	-18.3	-13.8	12.5	30.9	130.7	1209.1	132.8	1189.4	
19:33:00	25:36	67	7111	7101.4	422.2	424.9	-19.0	-14.8	11.0	28.2	128.9	1225.5	130.7	1205.2	
19:33:27	26:03	68	7233	7219.1	416.0	417.9	-19.8	-15.6	10.0	26.0	127.0	1242.7	128.6	1221.9	
19:33:51	26:27	69	7367	7355.3	409.0	411.0	-20.2	-16.7	11.5	28.1	125.4	1260.3	127.0	1238.6	
19:34:18	26:54	70	7494	7449.1	402.0	404.6	-21.5	-17.7	-	26.7	123.8	1276.4	125.2	1253.7	
19:34:48	27:24	71	7626	7601.0	395.2	397.5	-22.5	-18.6	10.0	29.3	122.0	1294.0	123.5	1271.7	
19:35:15	27:51	72	7742	7732.8	388.4	390.6	-23.4	-19.6	10.2	26.5	120.3	1311.7	121.5	1288.8	

**Table 5. Flight Data for Flight Number 3, Sonde Number 9 (Concluded)**


Time GMT H M S	Time $T_o$ M S	NWS Baro. Cont.	NASA Radar ALT-M	NWS ALT-M	MRS ALT-M	NWS Press. mb	MRS Press. mb	NWS Temp. °C	MRS Temp. °C	NWS R.H. %	MRS R.H. %	NWS Refr. Index	MRS Refr. Index
												N	M
19:35:45	28:21	73	7882	7847.0	381.8	383.5	-24.4	-20.6	10.3	26.6	118.6	1329.9	119.7
19:36:12	28:48	74	8000	7978.7	375.2	377.5	-25.5	-21.4	10.1	26.4	117.0	1346.8	118.1
19:36:39	29.15	75	8106	8102.8	368.4	371.0	-26.5	-22.8	--	26.8	115.6	1363.8	116.6
19:37:09	29.45	76	8263	8280.2	362.0	364.1	-27.6	-23.5	12.0	27.4	114.3	1384.0	114.7
19:37:33	30.09	77	8381	8373.5	355.4	358.0	-28.5	-24.9	12.0	27.4	112.5	1399.5	113.3
19:38:00	30.36	78	8520	8514.4	349.0	351.5	-29.5	-25.8	10.0	26.3	110.8	1416.8	111.5
19:38:27	31.03	79	8655	8624.6	342.8	345.4	-30.5	-26.8	10.1	25.3	109.2	1435.2	109.9
19:38:51	31.27	80	8769	8726.8	336.6	339.5	-31.5	-27.7	--	25.5	107.8	1452.6	108.3
19:39:18	31.54	81	8899	8812.3	330.4	333.0	-32.6	-29.0	11.0	26.4	106.2	1471.3	106.7
19:39:45	32.21	82	9052	9015.4	324.4	327.0	-32.6	-30.3	12.5	28.5	104.9	1488.6	105.4
19:40:09	32.45	83	9180	9151.4	318.4	321.7	-34.6	-31.3	13.0	29.5	104.9	1488.6	105.4
19:40:36	33.12	84	9296	9283.9	312.4	315.4	-35.7	-32.5	15.0	31.5	102.1	1524.1	104.1
19:41:00	33.36	85	9438	9398.2	306.6	309.7	-36.7	-32.9	--	32.0	100.4	1543.5	100.8
19:41:24	34.00	86	9567	9548.9	300.8	303.7	-37.8	-34.8	15.0	32.4	99.2	1559.8	99.6
19:41:51	34.27	87	9700	9665.8	295.0	298.3	-38.7	-35.4	15.1	32.3	97.6	1578.9	98.0
19:42:18	34.54	88	9833	9796.0	289.4	292.6	-40.0	-36.6	18.0	34.8	96.4	1596.0	96.6
19:42:42	35.18	89	9957	9928.6	283.6	287.3	-41.3	-37.7	24.0	37.6	95.1	1614.9	95.3
19:43:15	35.51	90	10108	10066.1	278.0	281.8	-42.6	-38.6	--	42.6	95.6	1633.0	93.8
19:43:48	36.24	91	10230	10199.0	272.4	276.1	-43.5	-39.8	39.0	45.4	92.3	1653.5	92.4
19:44:15	36.51	92	10348	10324.1	267.1	271.1	-44.7	-40.8	47.5	50.7	91.1	1671.1	91.2
19:44:48	37.24	93	10495	10457.4	261.8	265.9	-45.5	-42.0	42.0	48.3	89.8	1688.3	89.8
19:45:15	37.51	94	10607	10602.7	256.6	260.6	-46.5	-43.2	36.0	45.1	88.3	1707.4	88.4
19:45:48	38.24	95	10744	10739.1	251.4	255.2	-47.8	-43.6	--	43.3	86.5	1729.5	86.6
19:46:18	38.54	96	10871	10860.9	246.2	250.6	-48.3	-45.2	28.0	40.8	85.5	1745.3	85.6
19:46:51	39.27	97	11018	11007.9	241.0	245.1	-48.6	-45.4	18.0	37.2	83.6	1768.5	83.8
19:47:18	39.54	98	11163	11141.8	236.0	240.3	-49.8	-46.0	16.5	33.6	82.2	1788.5	82.3
19:47:45	40.21	99	11282	11255.5	231.0	235.9	-51.0	-47.3	16.0	32.7	81.2	1804.2	81.3
19:48:12	40.48	100	11394	11387.8	226.2	231.3	-52.3	-48.3	--	32.5	79.9	1823.0	80.0
19:48:45	41.21	101	11562	11534.8	221.2	226.2	-53.2	-49.2	15.0	32.2	78.4	1844.9	78.5
19:49:12	41.48	102	11708	11676.3	216.6	221.7	-54.5	-50.6	15.5	31.3	77.4	1862.1	77.4
19:49:39	42.15	103	11857	11799.9	212.0	217.4	-55.7	-51.8	17.5	33.5	76.3	1879.7	76.3
19:50:06	42.42	104	11974	11944.0	207.2	212.6	-56.8	-53.3	18.0	34.7	75.1	1899.4	75.2
19:50:36	43.12	105	12093	12083.6	202.6	208.2	-57.9	-54.4	--	35.4	73.9	1918.5	74.0
19:51:03	43.39	106	12210	12207.5	198.2	204.0	-59.0	-55.4	21.0	35.8	72.8	1937.0	72.8

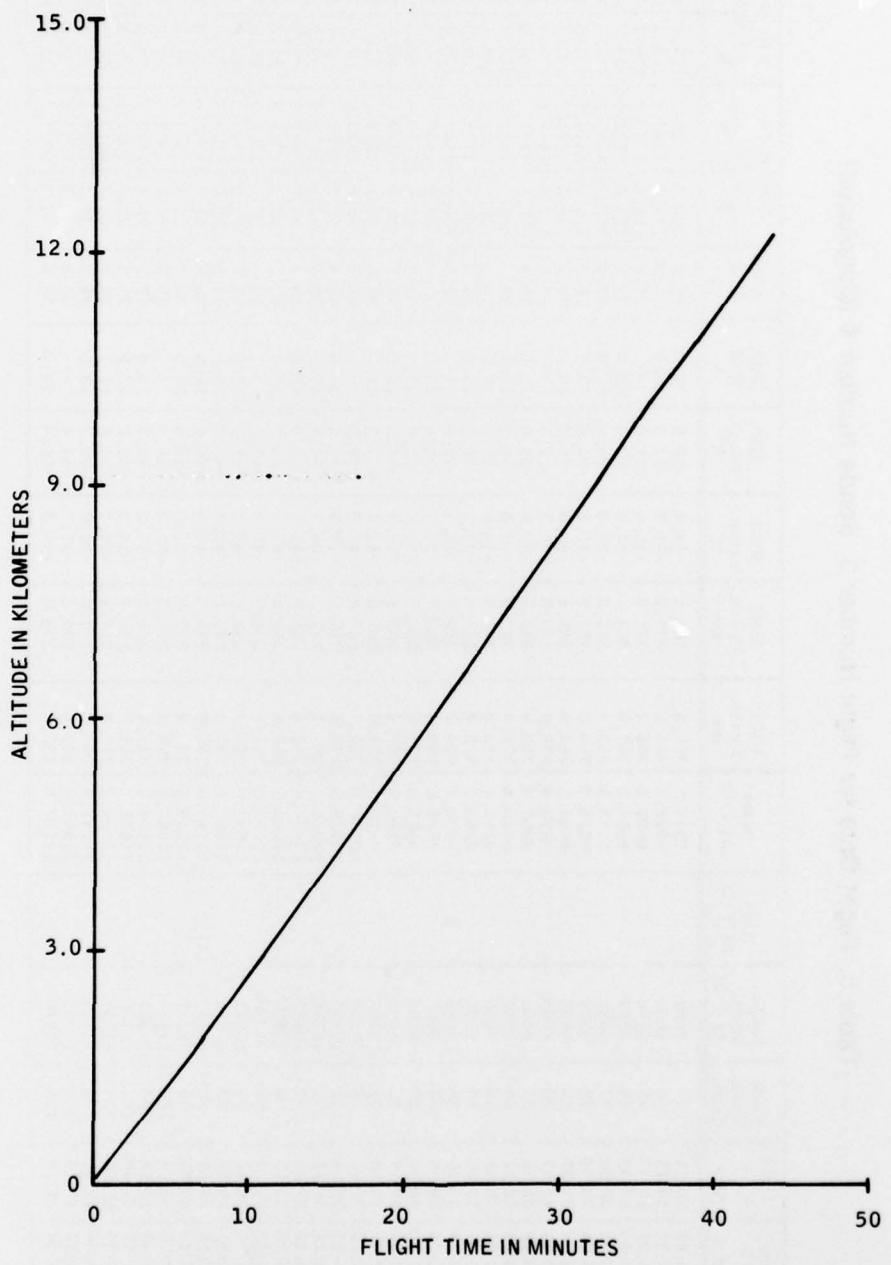

**Figure 22. Plot of Altitude versus Time Measured with Mini-Refraction Sonde — Flight Number 3**

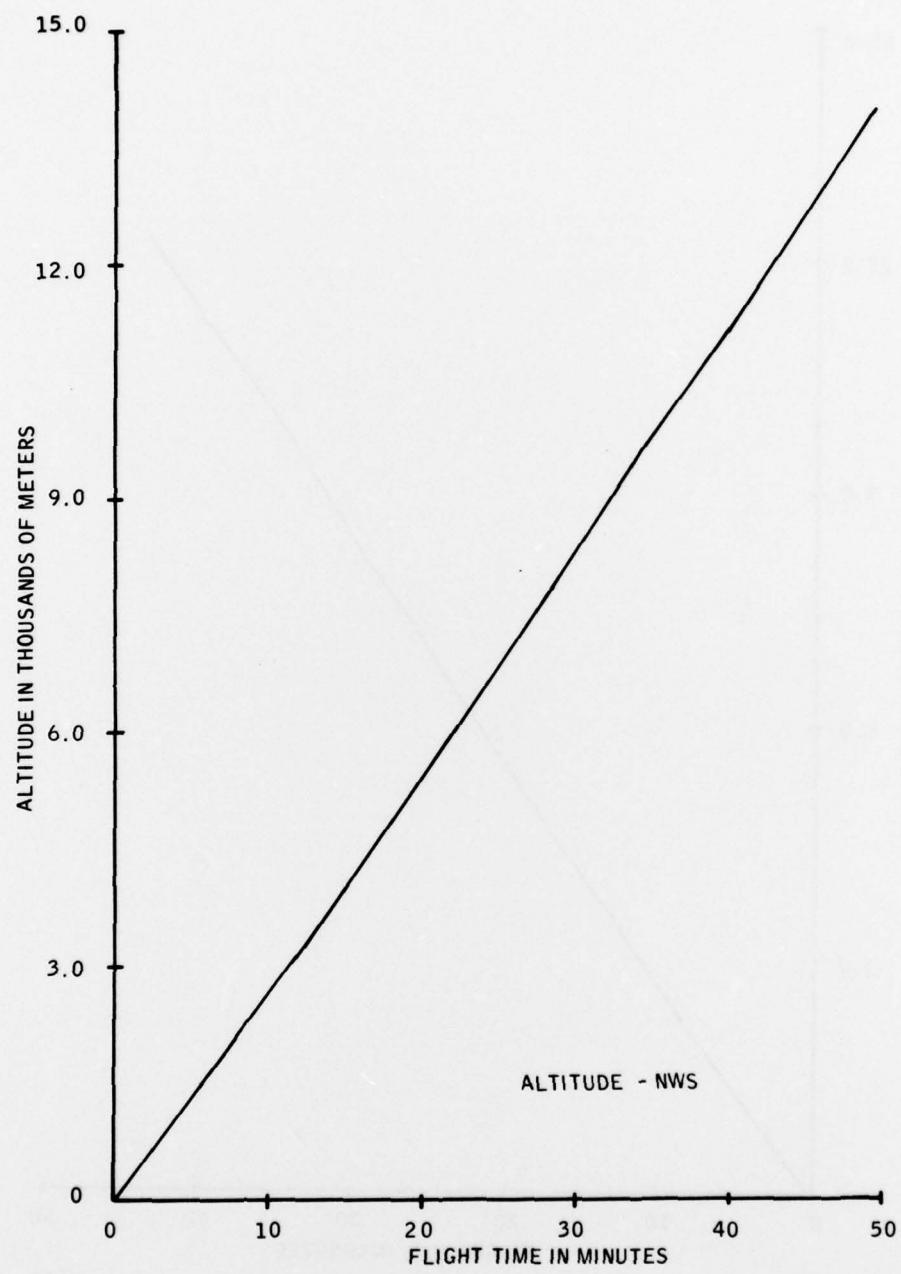

**Figure 23.** Plot of Altitude versus time Measured with NWS Rawinsonde — Flight Number 3

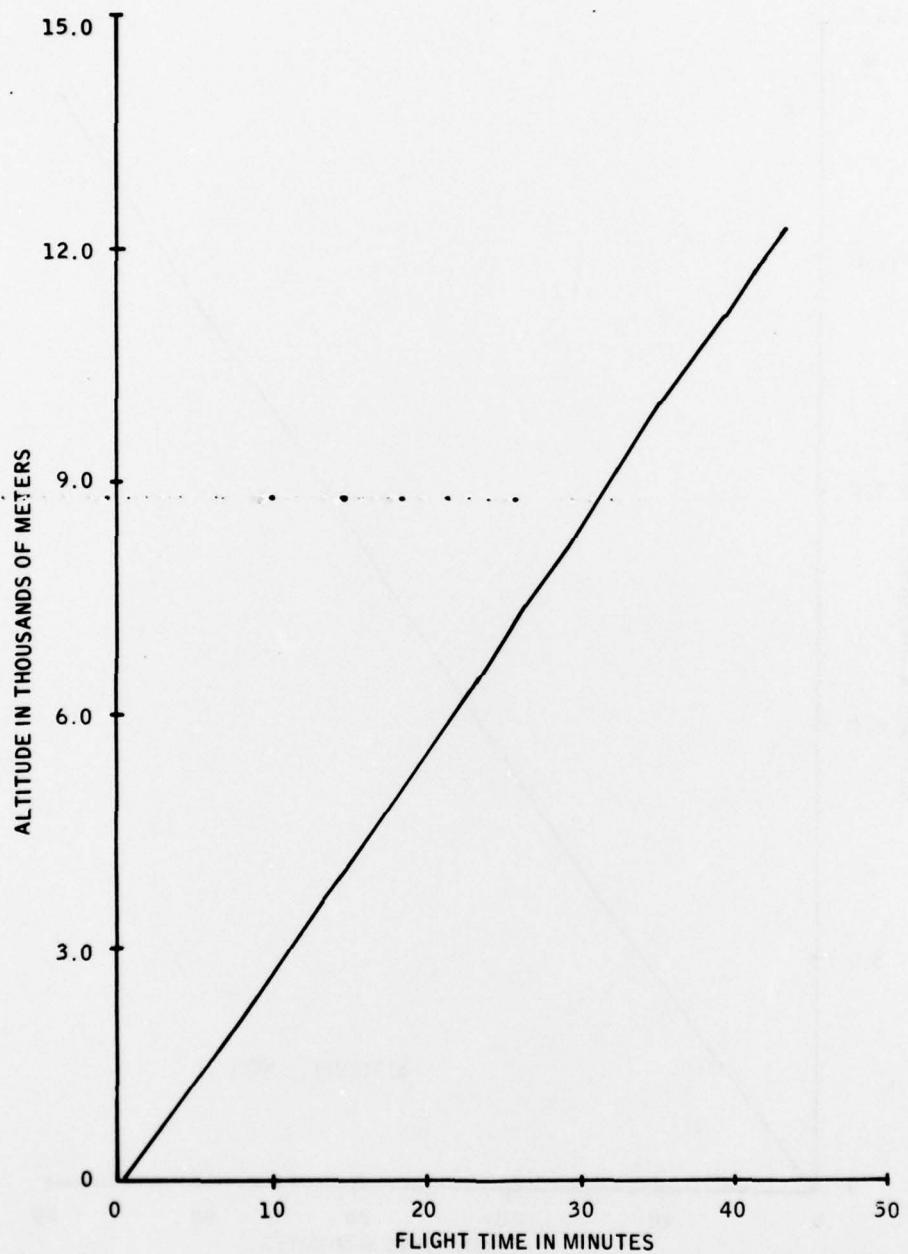

**Figure 24. Plot of Altitude versus Time Measured with NASA Radar — Flight Number 3**


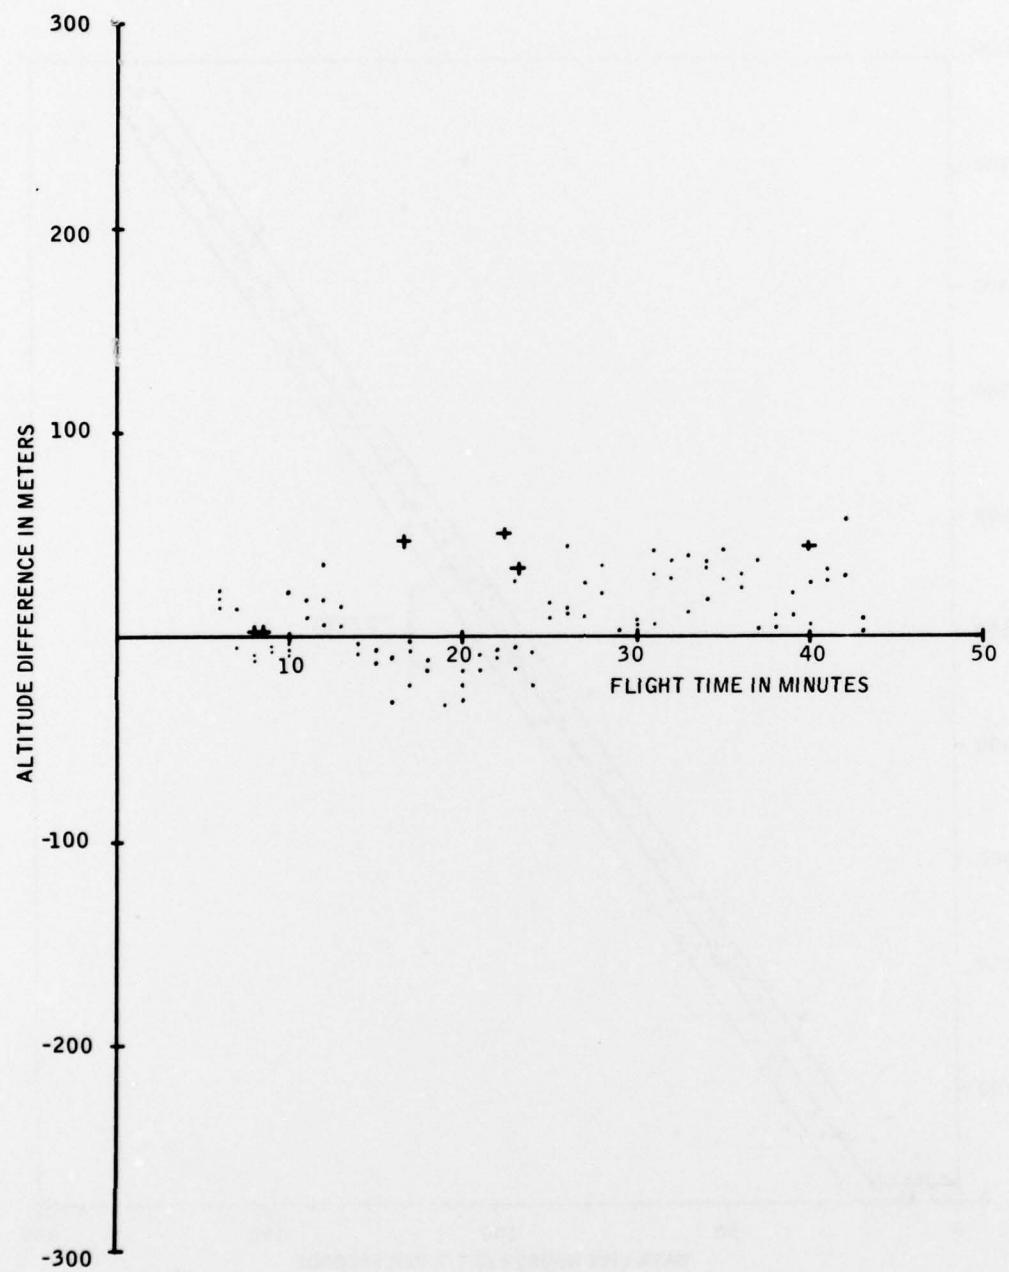


Figure 25. Plot of Difference in Altitude Reading of the MRS and Rawinsonde versus Radar — Flight Number 3

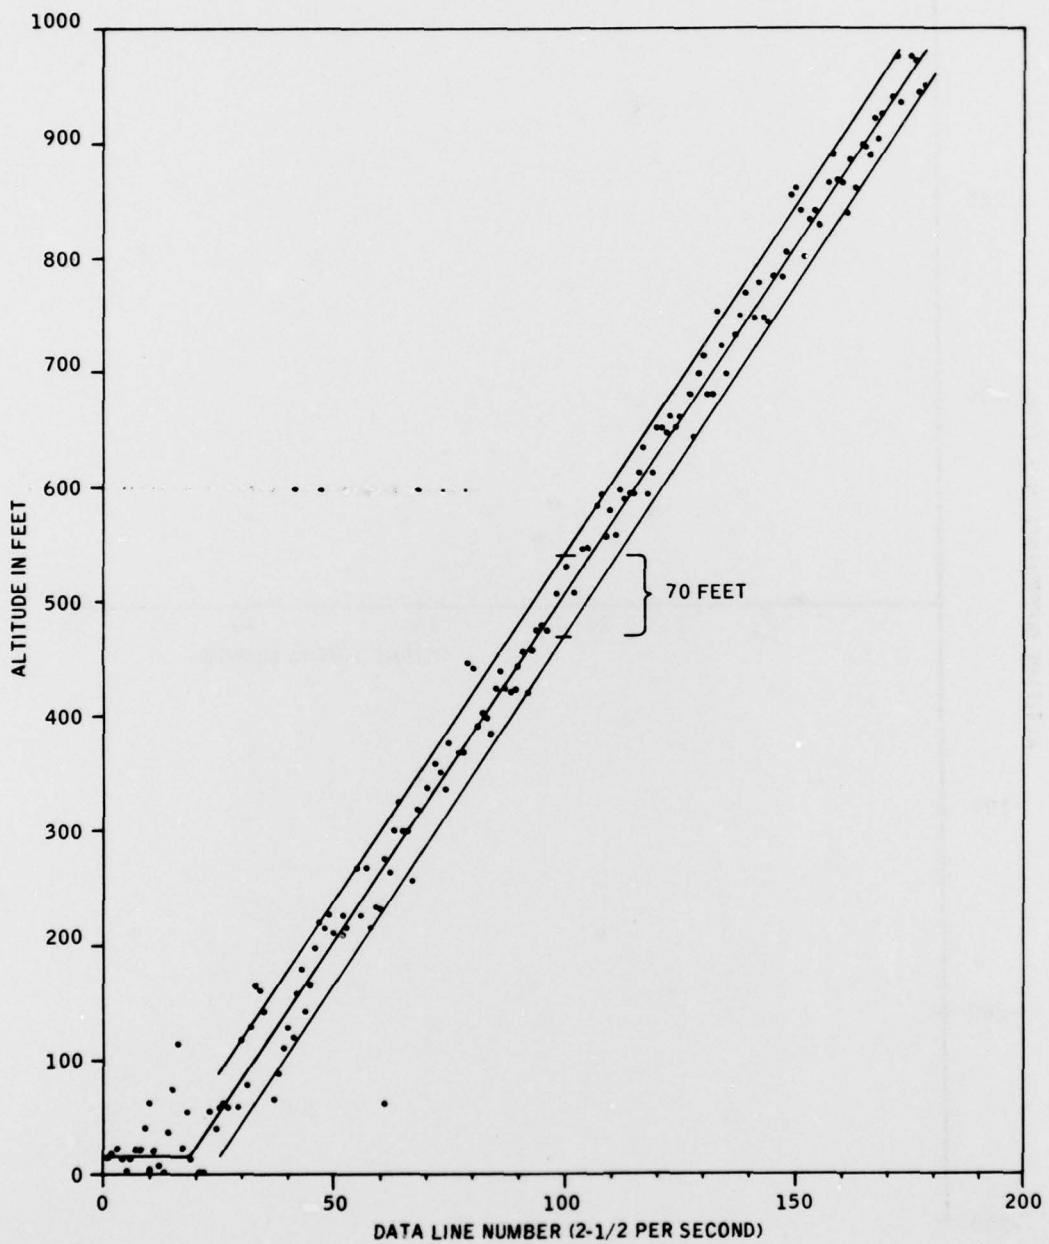

**Figure 26. Plot of Altitude versus Time for Flight Number 3 Measured with MRS.  
Each data point at 2-1/2 per second is plotted to show resolution.**

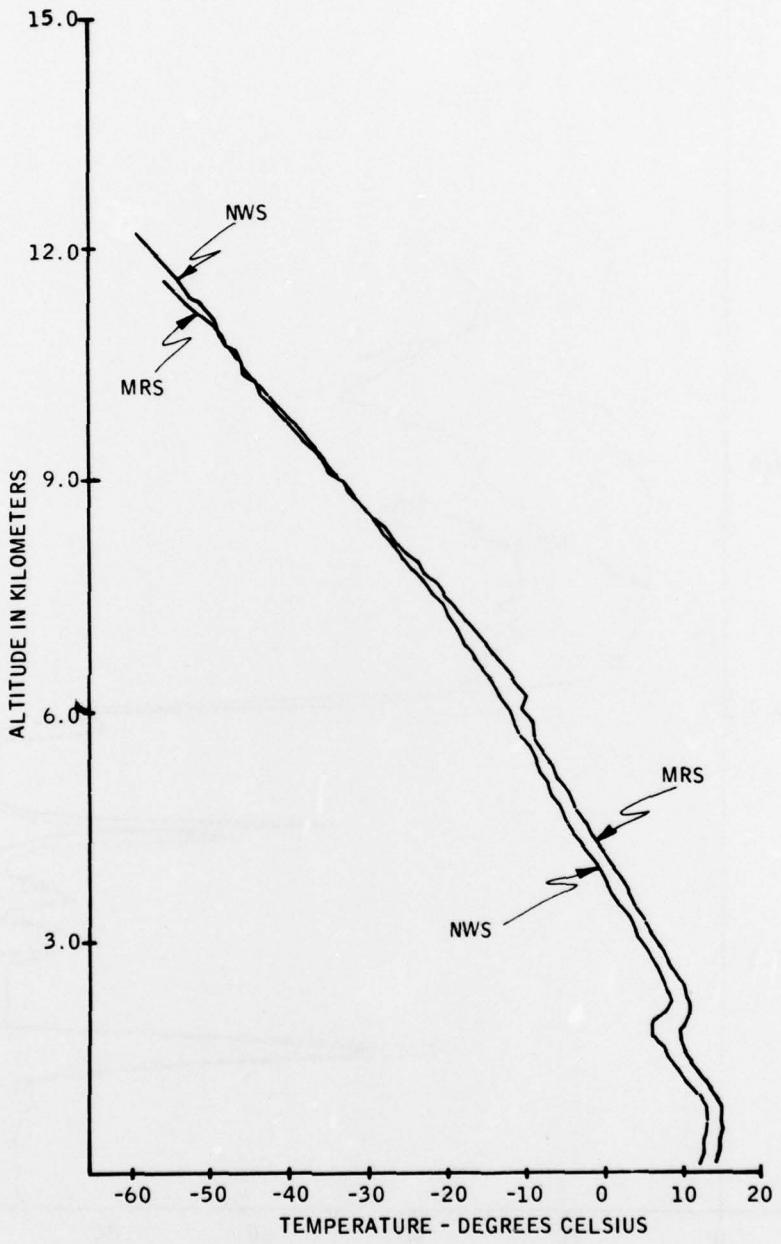


Figure 27. Plot of Free-Air Temperature versus Altitude for the MRS and Rawinsonde — Flight Number 3


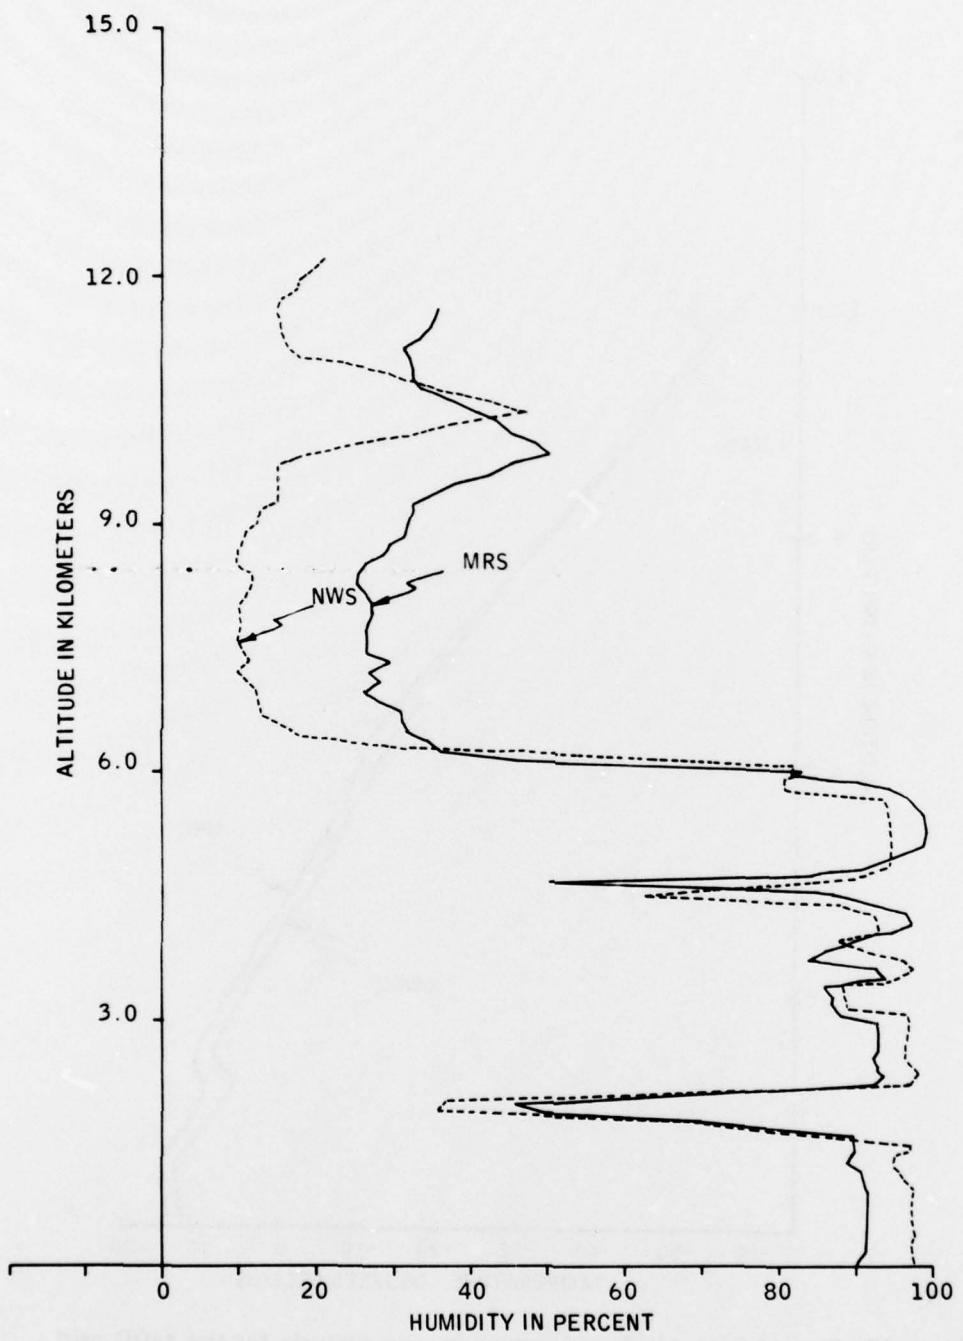


Figure 28. Plot of Relative Humidity versus Altitude for the MRS and Rawinsonde — Flight Number 3

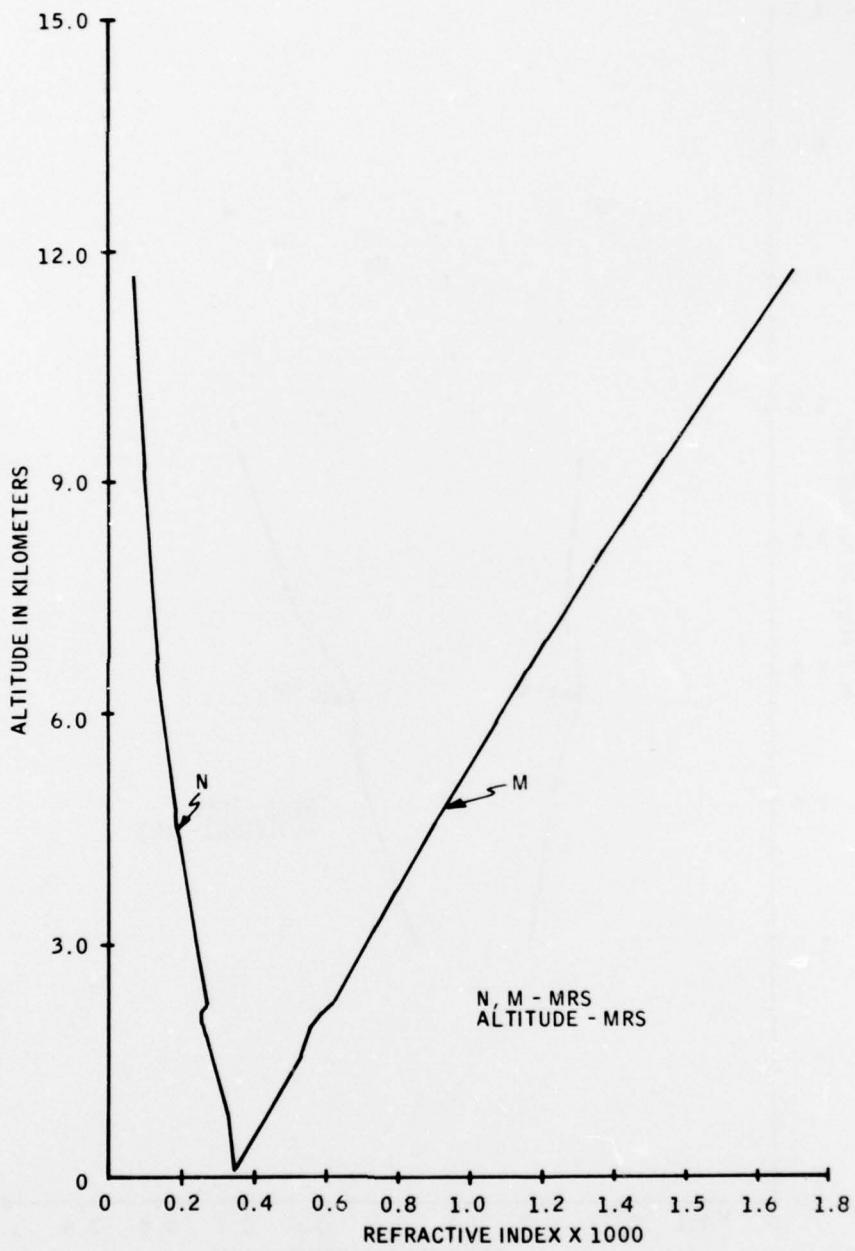

**Figure 29.** Plot of Modified Refractive Index, N, and M-Units versus Altitude Read by Mini-Refraction Sonde — Flight Number 3

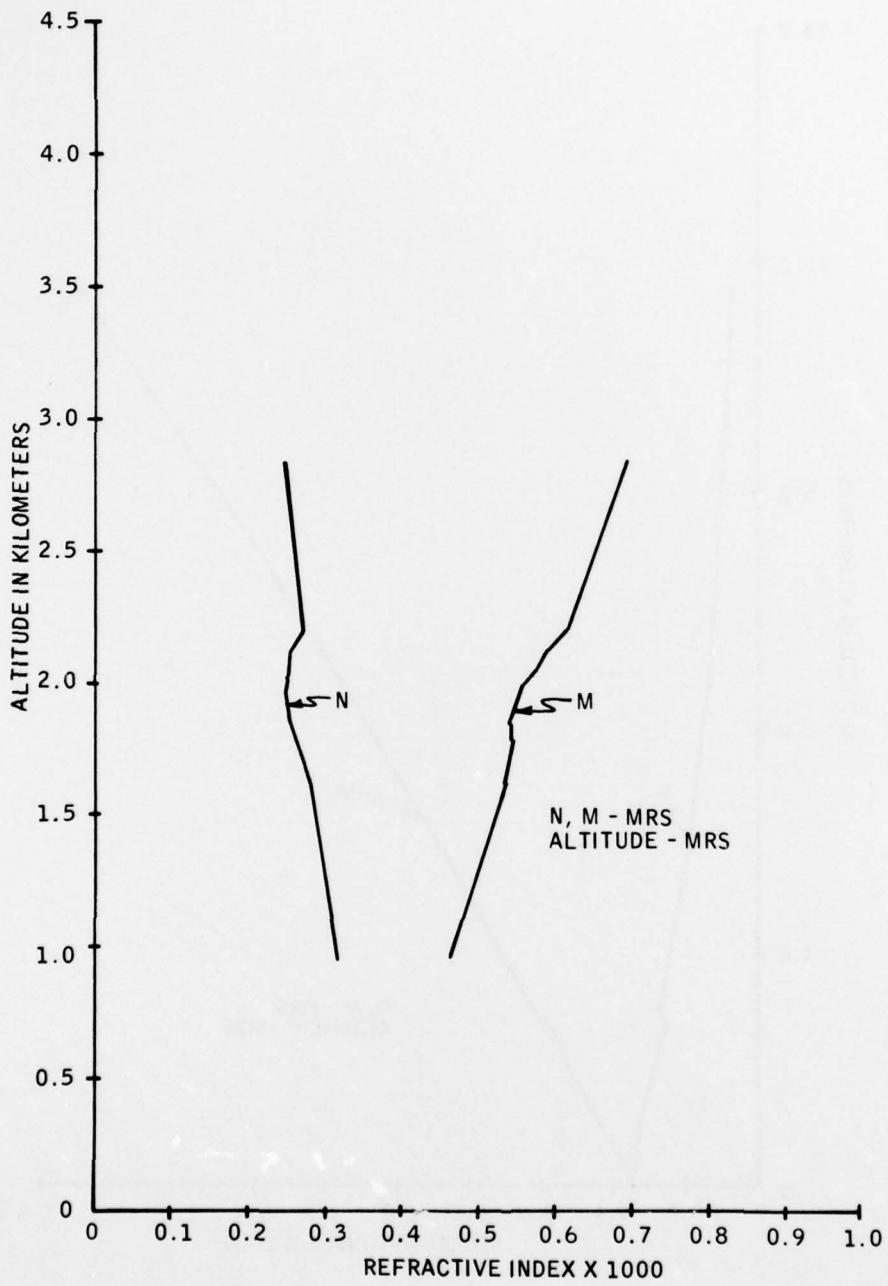


Figure 30. Plot of N and M versus Altitude with an Expanded Scale to Illustrate Resolution

#### D. DATA REDUCTION

The Mini-Refraction Sonde has two significant advantages for the measurement of refractive index. The first is the small size and light weight of the sonde which simplifies field operation. A second advantage is the high vertical resolution of data due to the use of fast time commutation of the sensors.

A 0.1-second switching rate is used to commutate each of the temperature, pressure and humidity sensors. A complete cycle is completed every 400 milliseconds. At a balloon ascent rate of 800 feet per minute, this gives a vertical resolution of 5.33 feet. In other words, the temperature, humidity, altitude and refractive index are sampled every 5.33 feet of ascent. This gives a very fine resolution to the analysis of refractive layers.

As an illustration of this resolution, refer to Figure 15. A weak inversion layer was located at 600 meters during the first flight. This layer can be detected by the slight inflection or bump in the N and M curves. It is difficult to see much of the character of the refractive index at this scale; therefore, the N and M values were replotted for the first 1000 meters of the flight as shown in Figure 31. This plot shows the refractive index at each of the contact points of the NWS Rawin-sonde. Although this shows the refractive layer more clearly, it is still hard to see the fine structure.

A plot of the N and M values, measured with the Mini-Refraction Sonde for the first 1000 meters of flight, is shown in Figure 32. This plot shows the 2-meter altitude resolution of the MRS. The refractive layer can clearly be seen. It starts at 460 meters and ends at 770 meters. This demonstrates the value of the high data rate available from the time-commutated Mini-Refraction Sonde.


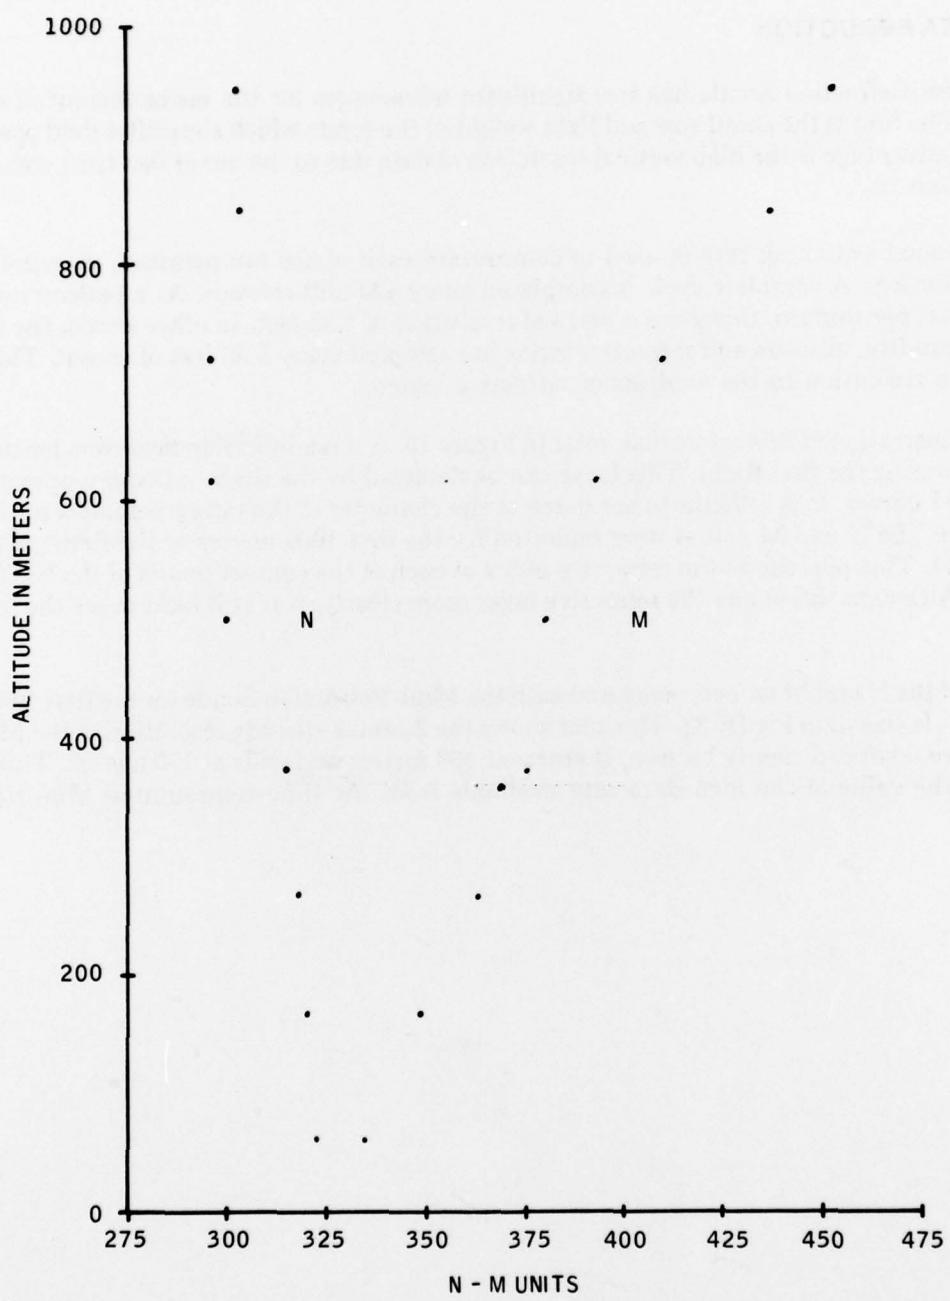


Figure 31. Plot of N and M versus Altitude for the First 1000 Meters of Flight Number 1 — Data Plotted at Switch Points Only

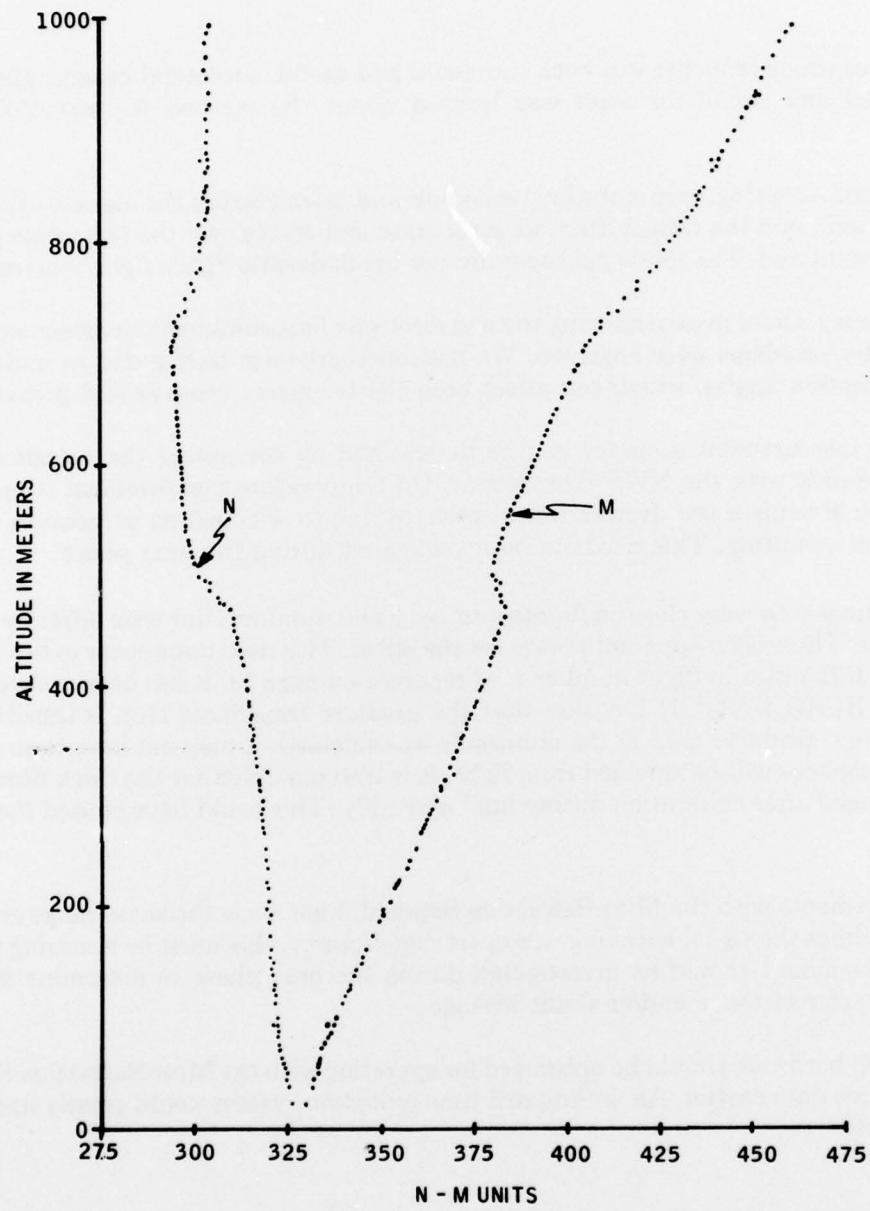

**Figure 32.** Plot of N and M versus Altitude for the First 1000 Meters of Flight Number 1 — Data Plotted for most of the Outputs of the Mini-Refraction Sonde at 2-1/2 Samples Per Second

#### **IV. Conclusions**

This series of three sonde launches was both successful and useful, successful because the total system functioned and useful for what was learned about the method for meteorological soundings.

All sondes operated—sensing, commutating, encoding and telemetering the signals—the batteries performed well, and the transmitters were accurate and stable over the temperature and voltage range encountered. The sonde packages did not break despite lightweight construction.

These tests were very useful in experiencing the meteorological measurement environment, and potential telemetry problems were observed. We noticed short term fading due to multipath fading at low reception angles, which can affect both the telemetry receiver and processor.

An indication of measurement accuracy can be determined by comparing the output of the Mini-Refraction Sonde with the NWS Rawinsonde. On temperature measurement it appears that the MRS sonde reads a few degrees warm, perhaps due to self-heating or because of the thermal lag of the mounting. This needs to be investigated during the next phase.

The pressure readings were very close on flights number 2 and number 3 but were offset by 5 mB on flight number 1. There is no apparent reason for the offset. This does not appear to be caused by the telemetry difficulties in flight number 1, as reported on page 13. It has been pointed out by Honeywell's MICRO SWITCH Division that the pressure transducer chip is sensitive to light. Although the transducer used in the minisonde was shielded, it may not have been light-tight. The future devices will be shielded from light. It is also possible that the thick film electronics were damaged after calibration during final assembly. This could have caused the calibration offset.

Humidity measurements with the Mini-Refraction Sonde did not show the same range as with the NWS Sonde. Since the signal encoding was operating properly, this must be a sensing problem. The hygristor mount should be investigated during the next phase to determine if it is causing high contact resistance and/or shunt leakage.

The data reduction hardware should be optimized for operating with the Mini-Refraction Sonde equipment to reduce data scatter. An on-line real time reduction system would greatly improve field measurements.

## **Appendix A**

### **Acknowledgements**

We wish to thank the personnel of NASA for their guidance and assistance as well as the excellent facilities support at Wallops Island, Virginia. We also wish to acknowledge the following personnel from NADC for their capable assistance in the performance of these flight tests.

#### **NASA**

Bill Lord  
Ray Atkins  
Joe Paranzino

#### **NADC**

Ed Schmidt  
Ralph Sellitsch