

AD-A063 875 ARMY MATERIEL SYSTEMS ANALYSIS ACTIVITY ABERDEEN PROV--ETC F/G 12/1
SIMULATION OF SEQUENTIAL TESTS. (U)
NOV 78 W J BROEMM

UNCLASSIFIED


AMSAA-TR-241

NL

| OF |
AD
A063 75
REF ID: A6375




END
DATE
FILED
3-79
DDC

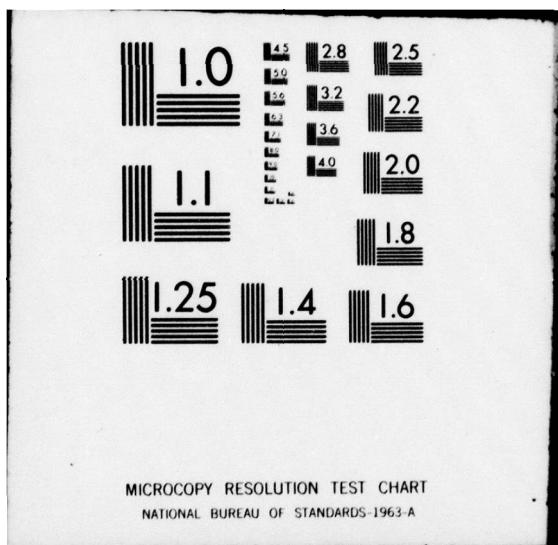

DDC FILE COPY

AD A0 63 875



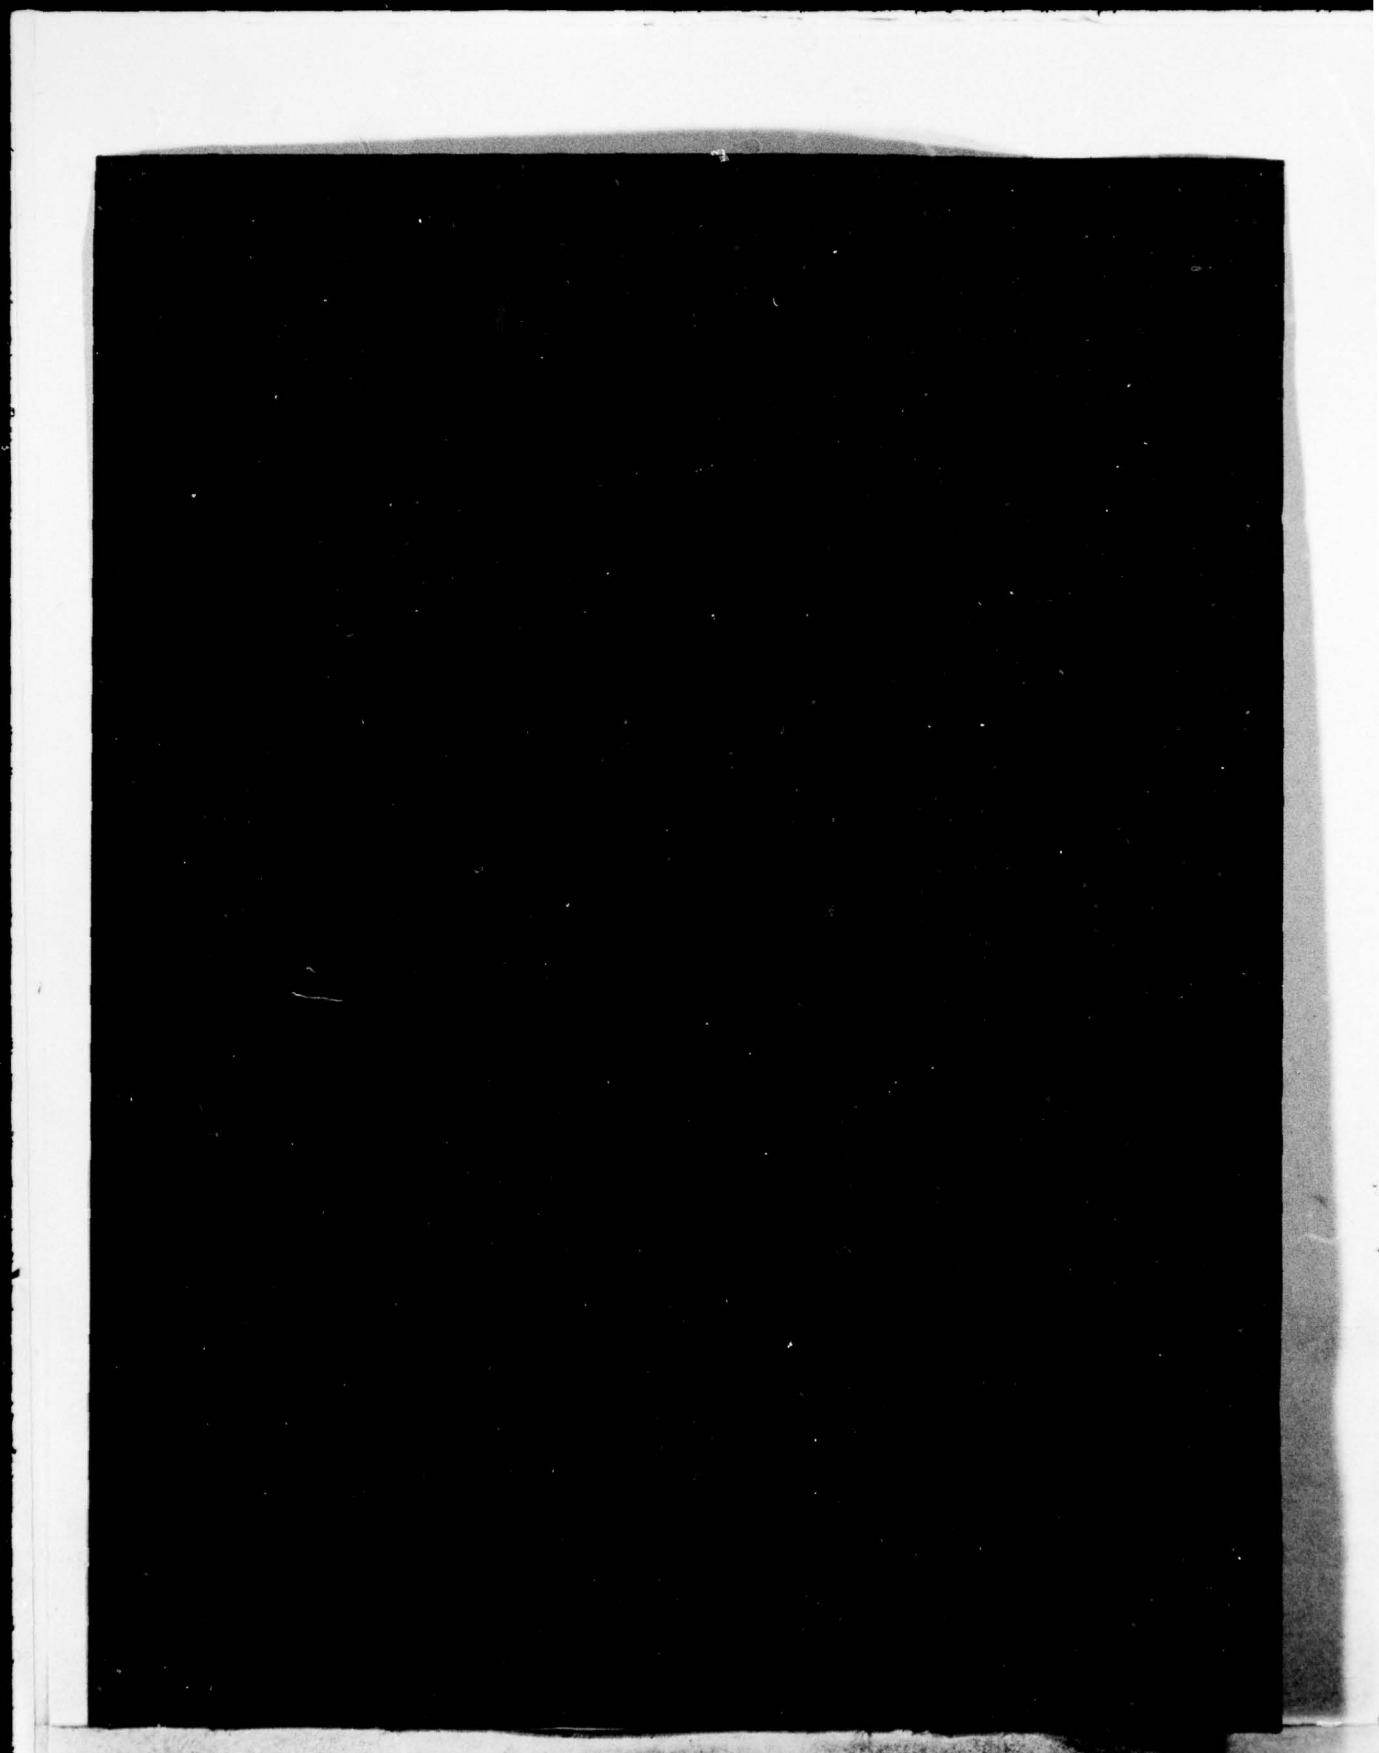

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

⑨ REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AMSA Technical Report No. 241	2. GOVT ACCESSION NO. 14	3. RECIPIENT'S CATALOG NUMBER AMSA-TR-241
4. TITLE (and Subtitle) 6) Simulation of Sequential Tests.	5. TYPE OF REPORT & PERIOD COVERED	
7. AUTHOR(s) 10) William J. Broemm	6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Director, US Army Materiel Systems Analysis Activity, ATTN: DRXSY-RE, Aberdeen Proving Ground, MD 21005	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS DA Project No. 16) 1R765706M541	
11. CONTROLLING OFFICE NAME AND ADDRESS 12) 56p. 11)	12. REPORT DATE NOV 1978 /	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Commander, US Army Materiel Development and Readiness Command, 5001 Eisenhower Avenue, Alexandria, VA 22333	13. NUMBER OF PAGES 65	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Probability Ratio Sequential Tests Discrimination Ratio Accept-reject criteria theta 1		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A computer program is presented which simulates a Probability Ratio Sequential Test (PRST) plan from MIL-STD 781C. Upon selection of an applicable test plan and a lower test MTBF (1), the simulation determines, for a chosen range of true MTBFs, (1) the probability of reaching maximum (total) test time before making a decision (to either accept or reject equipment) and (2) the probability of reaching the last failure in the test plan. Examples are available from selected test plans.		

ACKNOWLEDGMENTS

I wish to thank Harry B. Tanner for his ideas concerning the several "weighting schemes" and for his helpful suggestions regarding the CALCOMP plotting subroutines. I also wish to thank Gregory J. Gibson for getting me started on the project.



CONTENTS

	Page
1. INTRODUCTION	9
2. APPLICATION OF MIL-STD 781C AND THEORETICAL CONSIDERATIONS	9
3. PROCEDURE FLOWCHART	15
4. DESCRIPTION OF THE ALGORITHM	17
5. RECOMMENDATIONS FROM COMPUTATIONAL EXPERIENCE	18
6. ILLUSTRATIVE EXAMPLES	18
7. SUMMARY	19
APPENDIX I - DATA INPUT CARDS	21
APPENDIX II - PROGRAM MS 781C - PROGRAM VARIABLES	25
APPENDIX III - CURVE SMOOTHING SCHEMES (5,7 - POINT)	29
APPENDIX IV - PROGRAM FLOWCHART	33
APPENDIX V - SUMMARY OF RESULTS - TEST PLANS I-VIII	39
PROGRAM MS 781C	43
DISTRIBUTION LIST	65

LIST OF FIGURES

	<u>Page</u>
<u>Figure</u>	
1 A Generalized PRST Plan.	10
2 Last Failure Consideration	11
3 Maximum Test Time Consideration.	12
4 Weighting Scheme	13
5 Curve Smoothing Scheme (3-Point)	14
6 Curve Smoothing Scheme (9-Point)	14
7 Procedure Flowchart.	16
8 Curve Smoothing Scheme (5-Point)	31
9 Curve Smoothing Scheme (7-Point)	31
10 Program Flowchart.	35

LIST OF TABLES

<u>Table</u>	<u>Page</u>
1 Test Plan Matrix.	15
2 Data Input Cards.	23
3 Comparison of Test Plans II and VI.	18
4 Simulation Results for Test Plans II and VI	19
5 Dictionary of Program Variables	27
6 Summary of Results.	42

SIMULATION OF SEQUENTIAL TESTS

1. INTRODUCTION

The computer program presented in this paper is offered as an aid to test planners and those who are concerned with the application of the Reliability Design Qualification and Production Acceptance Tests (Exponential Distribution), more specifically, the Probability Ratio Sequential Test (PRST) plans from MIL-STD-781C.

The PRST plans, which come under the category of statistical test plans, should be employed when a sequential test plan with minimal decision risks (10 to 20 percent) is desired. In the main, the PRST plans would be preferred to the fixed length test plans when the objective of the test is to accept material with a high mean-time-between-failures (MTBF) or reject material with a very low MTBF as quickly as possible.¹

In view of these considerations, the utilization of the methodology proposed should permit the test planner, equipped with a reasonable amount of practical experience with the PRST plans, to make certain probabilistic statements regarding termination points in the plans, namely (1) the likelihood of reaching the last failure and (2) the likelihood of reaching the maximum test time.

Historically, the PRST plans have no provision for establishing a definitive estimate of the true MTBF of an item prior to testing. Therefore, the expected time required for test completion may vary significantly. Consequently, program costs and schedules have to be planned to compensate for this range of uncertainty. However, with the help of the methodology delineated herein, one may be able to choose an appropriate test plan from MIL-STD-781C, select a lower test MTBF (θ_1), specify a realistic range of true MTBFs for consideration, implement the simulation, and finally obtain measures of the two likelihood estimates aforementioned, all of this in order to reduce the range of uncertainty and therefore, minimize program cost overruns.

2. APPLICATION OF MIL-STD-781C AND THEORETICAL CONSIDERATIONS

A typical PRST plan from MIL-STD-781C, regardless of the total number of failures and the total test time in the plan, will basically assume an appearance as depicted in Figure 1. Given that the decision risks, discrimination ratio, total number of failures, and accept-reject criteria are all in harmony, of concern is not the general shape or length of the PRST arrow (shaded area) but the two termination vectors located in the arrowhead. For simplicity, we may designate the last failure as F_L and the maximum total test time as T_M . The problem, then,

¹Proposed MIL-STD-781C Reliability Design Qualification and Production Acceptance Tests: Exponential Distribution.

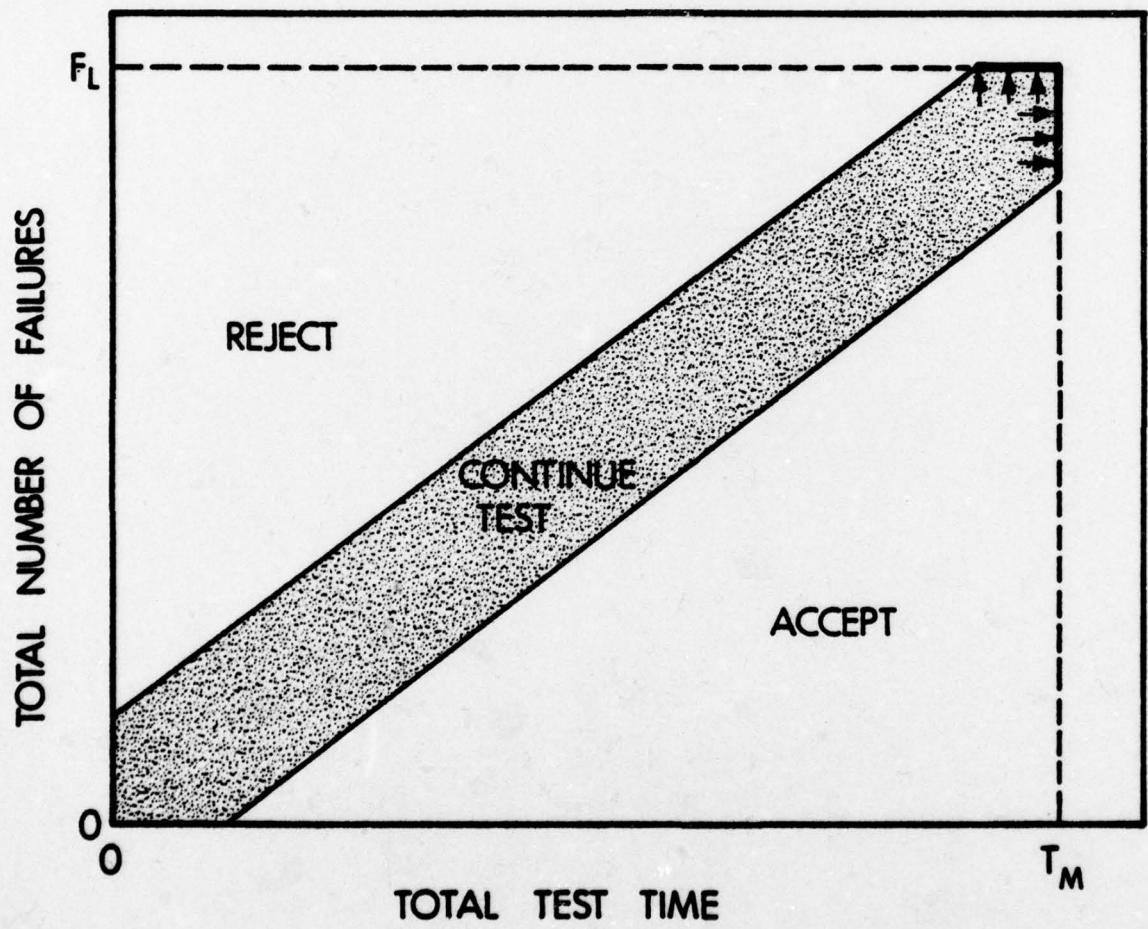


Figure 1. A Generalized PRST Plan.

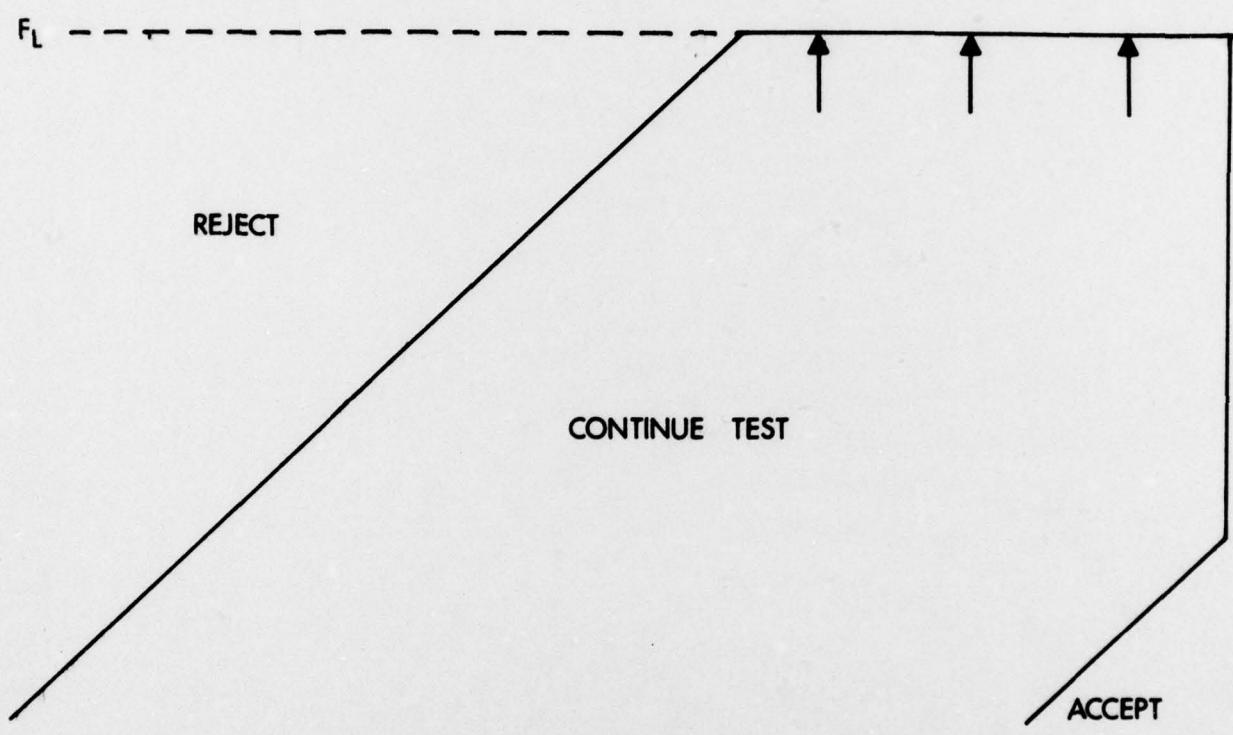


Figure 2. Last Failure Consideration.

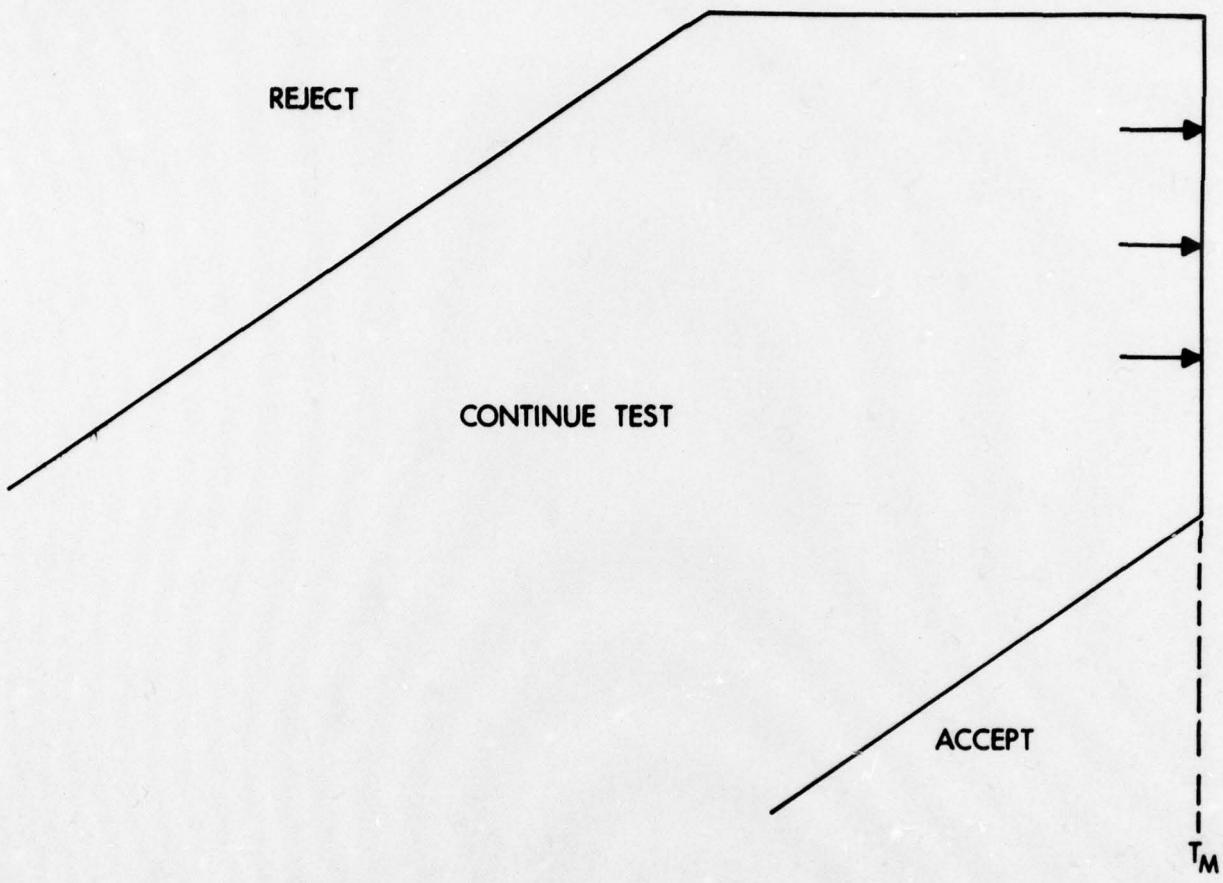


Figure 3. Maximum Test Time Consideration.

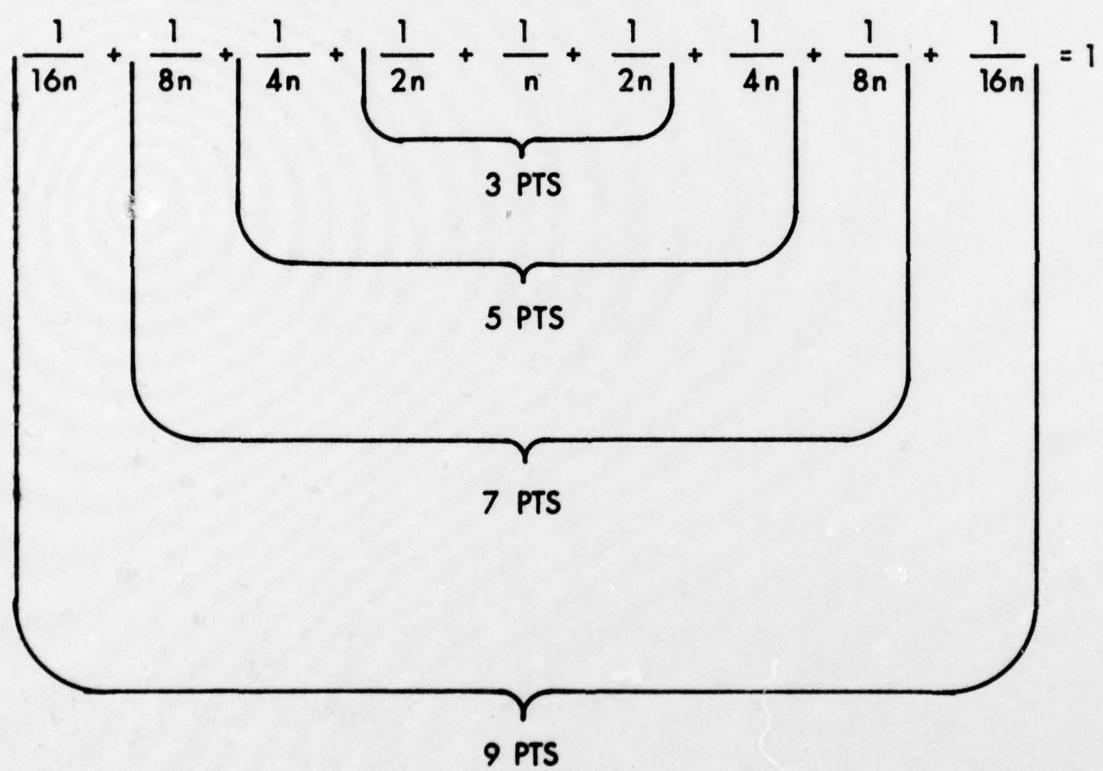


Figure 4. Weighting Scheme.

SUBROUTINE SUB3

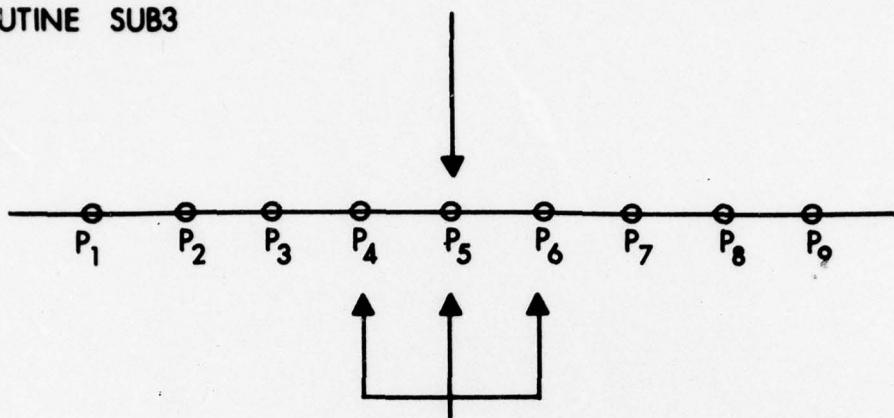


Figure 5. Curve Smoothing Scheme (3-Point)

SUBROUTINE SUB9

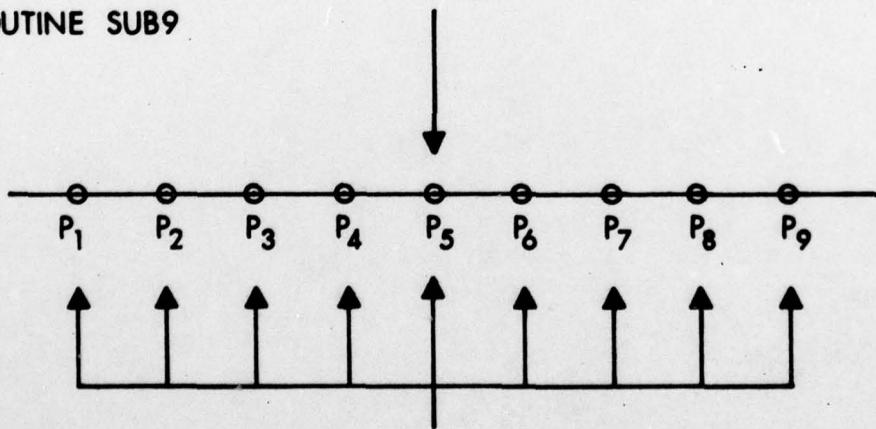


Figure 6. Curve Smoothing Scheme (9-Point)

becomes the following: When testing an item of equipment with the PRST plans, how often is the last failure reached? In other words, what is the likelihood of reaching F_L ?

In a similar manner, when testing an item of equipment with the PRST plans, how often is the maximum test time reached? That is, what is the likelihood of reaching T_M ? With these thoughts in mind, the purpose of the simulation, then, is to ascertain how often F_L and T_M are reached. (Figures 2, 3).

Once arrays of these likelihood estimates are determined for a representative range of true MPBFs, it may be feasible, strictly for the benefit of the CALCOMP plots, to effect minor changes to these arrays by employing a simple weighting scheme (Figure 4). By allowing a particular data point to have a weight of $1/n$, successive neighboring data points in either direction can be assigned weights of $1/2n$, $1/4n$, $1/8n$ and so on. This scheme essentially permits valuable information to be used from data points in proximity (Figure 5, 6). If one is not so inclined toward implementing such curve-smoothing techniques, the unsanitized raw data points are still available.

3. PROCEDURE FLOWCHART

All that the user of the computer program (henceforth, referred to as program MS 781C) need be concerned with is contained in this section. An adherence to the principles set forth in the procedure flowchart (Figure 7) and the preparation of the data input cards for program MS 781C (Table 2) should permit the user to investigate a wide variety of options. There are two areas regarding input, though, that may require clarification - (1) the test plan matrix and (2) the accept-reject criteria.

A summary of the test plan matrix for MIL-STD-781C is shown below.

TABLE 1. MILITARY STANDARD 781 C

Test Plan Number	Maximum Number of Failures	Maximum Test Time (Theta One Multiple)	The Minimum Number of Failures From Which To Reach Maximum Test Time
1	41	49.50	36
2	19	21.90	15
3	16	20.60	12
4	8	9.74	5
5	7	10.35	4
6	3	4.50	2
7	6	6.80	3
8	3	4.50	2

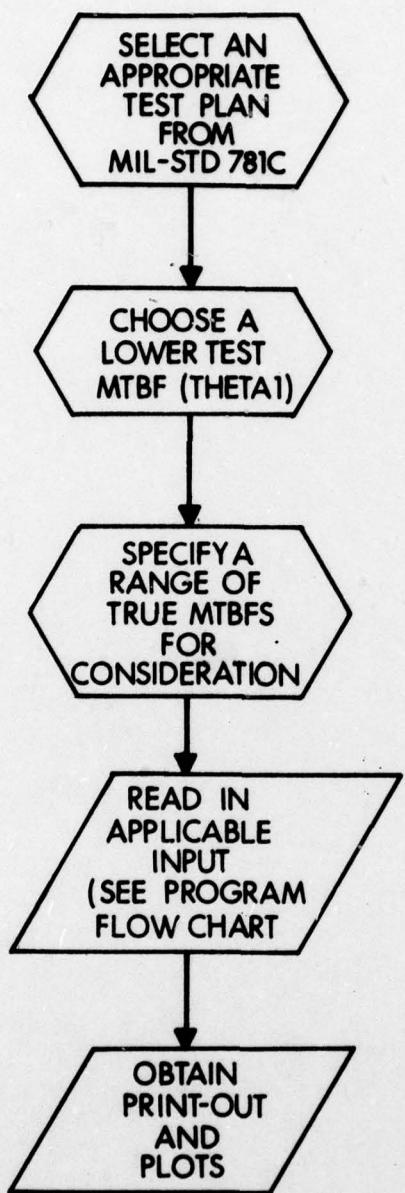


Figure 7. Procedure Flow Chart.

The test plan matrix (Table 1) is one of the required inputs to program MS 781C. It was defined in this way so that the user could specify the number of entries in the matrix (up to 25 entries as established in the program logic). Moreover, the test plan matrix was relegated to input status in order to provide flexibility for any user who chooses to submit a modified version of the test plan matrix, a version based on innovative truncation points perhaps.

Since the accept-reject criteria must be in accordance with the test plan matrix, it has also been placed in the domain of user-supplied input information. Care must be exercised, though, that the values for the reject line be input prior to the values for the accept line.

4. DESCRIPTION OF THE ALGORITHM

The essence of program MS 781C resides in a section of code (the algorithm) in the heart of the program. This set of instructions simulates the testing of an item of equipment using a typical PRST plan. The code, that is, set of instructions, makes use of two program counters. One counter corresponds to the last failure, F_L , and the other counter corresponds to the maximum test time, T_M . During each iteration of the simulation, an item of equipment can be either rejected, accepted, or put to further test (as exemplified by the continue test strip, Figure 1). If the item is rejected or accepted prior to reaching truncation, then no counters are incremented, and a new iteration is begun. If the item falls within the continue strip without a rejection or an acceptance, then another failure time is called for, and the above process is repeated.

In order to test against the maximum test time value, a particular failure time is compared with the T_M value. If that particular failure time is greater than or equal to the T_M value, then the T_M counter is incremented by one and a new iteration is begun. If that particular failure time is less than the T_M value, then another failure time is called for and queried in the same manner.


Similarly, in order to test against the last failure, a particular failure number is compared with the maximum failure number, F_L , to determine equality. If equality exists, then the F_L counter is incremented by one and a new iteration is begun. If equality does not exist; that is, if the particular failure number is less than the F_L value, then another failure is called for and queried in the same manner.

Now, if we allow each iteration to be an independent event, and if we conduct a large number of these trials, then the F_L and T_M


counters can be shown to be likelihood estimates for reaching the last failure and the maximum total test time, respectively. Furthermore, these likelihood estimates can be viewed in probabilistic terms.

5. RECOMMENDATIONS FROM COMPUTATIONAL EXPERIENCE

Once a PRST plan has been chosen and a value for the lower test MTBF (THETA ONE) has been designated, the only values that may require prudent selection are the three input parameters BASE, VALUE, and DELTAX (see Table 2, Appendix 1). Clearly, one would be interested in examining a range of true MTBFs encompassing both the lower test MTBF and the upper test MTBF (THETA ZERO). Something like the following might be of interest:



A problem may surface toward the lower end of the range of true MTBFs, though, if a value for the increment (DELTAX) is chosen too large. This problem could arise in subroutine SUB 9 where a neighborhood of nine (9) points is operated on:



For example, with a BASE MTBF of 15 hours and a DELTAX increment of 5 hours, the "lower-end" MTBF could attain a negative value, thereby creating a failure mode. However, the program logic is set up to handle this problem and will respond with a diagnostic to the user.

6. ILLUSTRATIVE EXAMPLES

In order to exemplify the range of possibilities that exists among the PRST plans, consider test plans II and VI (Table 3).

TABLE 3. COMPARISON OF TEST PLANS II AND VI

	<u>Decision Risks</u>	<u>Discrimination Ratio</u>	<u>Total Number of Failures</u>	<u>Total Test Time</u>
Test Plan II	20%	1.5:1	19	$21.90 * \theta_1$
Test Plan VI	20%	3.0:1	3	$4.50 * \theta_1$

Both test plans are based on the same risks. However, they differ in at least two respects: Test Plan VI has twice the discrimination ratio as Test Plan II, while Plan II is based on approximately six times as many failures as Plan VI.

Table IV below demonstrates simulation results for both plans at two specific data points - THETA ONE and THETA ZERO. In each cell, the top number gives the probability of reaching the maximum test time, $P(T_M)$, while the bottom number gives the probability of reaching the last failure, $P(F_L)$.

TABLE 4. SIMULATION RESULTS FOR TEST PLANS II AND VI

		@ THETA ONE		@ THETA ZERO	
TEST PLAN	II	$P(T_M)$.12	$P(T_M)$.21
		$P(F_L)$.12	$P(F_L)$.08
TEST PLAN	VI	$P(T_M)$.13	$P(T_M)$.39
		$P(F_L)$.86	$P(F_L)$.38

7. SUMMARY

The purpose of this study has been to develop an algorithm that, with the aid of Monte Carlo simulation techniques, would allow one to formulate certain probabilistic statements regarding termination points in the PRST plans. The information derived from program MS 781C coupled with empirical data from practical field experience with the plans should permit the test planner to obtain a grasp on the likelihood of arriving at the concluding points in the plans. With this kind of information, the test planner may be able to minimize program costs due to personnel and materials and perhaps get a better handle on structuring test schedules.

APPENDIX I
TABLE 2. DATA INPUT CARDS

Next Page is Blank.

APPENDIX I
TABLE 2. DATA INPUT CARDS

Data Card 1

Field 1	MAXNRF (I10)	The maximum number of failures for the test plan.
Field 2	NRITER (I10)	The number of iterations for the simulation e.g., 2000 or 10,000.
Field 3	NRTP (I10)	The number of the test plan being implemented.
Field 4	NRPLNS (I10)	The number of plans in the test plan matrix (not to exceed 25).
Field 5	BASE (F10.2)	The lowest MTBF in the range of MTBFs considered e.g., if an MTBF range of 50-250 is desired, then BASE would be 50.
Field 6	VALUE (F10.2)	The highest MTBF in the range of MTBFs considered.
Field 7	DELTAX (F10.2)	The increment value between successive MTBFs.
Field 8	THETA1 (F10.2)	The lower test MTBF.

Data Card 2

This data card consists of the array containing the values for the reject line. Data must be arranged sequentially, eight (8) values per card, not to exceed 200 values, i.e. 25 cards.

Data Card 3

This data card consists of the array containing the values for the accept line. Data must be arranged sequentially, eight (8) values per card, not to exceed 200 values, i.e. 25 cards.

Data Card 4

Field 1	MATRIX (K, 1) (F10.2)	The maximum number of failures for the test plan.
Field 2	MATRIX (K, 2) (F10.2)	The maximum test time (THETA ONE Multiple) for the test plan.
Field 3	MATRIX (K, 3) (F10.2)	The minimum number of failures from which to reach maximum test time.

Note: For data card 4, the data cards must be arranged sequentially, i.e. the first card must begin with test plan 1, the second card must begin with test plan 2, and so on. Data must be arranged three (3) values per card, not to exceed 25 cards.

APPENDIX II
TABLE 5. DICTIONARY OF PROGRAM VARIABLES

Next Page is Blank.

APPENDIX II
TABLE 5. DICTIONARY OF PROGRAM VARIABLES

	Variable	Type	Definition
1	NOF (I)	Program/Output	The number of failures in the test plan.
2	TMTBF (I)	Program/Output	The array of true MTBFs considered.
3	D (I)	Program	An array containing the lowest and highest true MTBF. Finds utility in the Fix Scale (FIXSCA) plotting subroutine.
4	TITLE (I)	Program	The arrays containing the symbol strings for the plotting subroutines.
5	AKOUNT (I) BKOUNT (I) CKOUNT (I) DKOUNT (I)	Program " " "	Arrays used for holding values from the counters.
6	MAXNRF	Input	The maximum number of failures for the test plan.
7	NRITER	Input	The number of iterations for the simulation.
8	NRTP	Input	The number of the test plan being implemented.
9	NRPLNS	Input	The number of plans in the test plan matrix.
10	BASE	Input	The lowest MTBF in the range of MTBFs considered.
11	VALUE	Input	The highest MTBF in the range of MTBFs considered.
12	DELTAX	Input	The increment value between successive MTBFs.
13	THETA1	Input	The lower test MTBF.

APPENDIX II

TABLE 5. DICTIONARY OF PROGRAM VARIABLES (CONTINUED)

	Variable	Type	Definition
14	INTVLS	Program	The number of intervals for the accept-reject criteria.
15	NRMTBF	Program	The number of MTBFs in the range of MTBFs considered.
16	UPPER	Program	The value used for maximum test time.
17	LIMIT	Program	The minimum number of failures from which to reach maximum test time.
18	KOUNT	Program	A local counter used to store the number of times maximum test time is reached.
19	KNT	Program	A local counter used to store the number of times the last failure is reached.
20	NCASE	Program	A local counter for tracking the number of cases in the simulation.
21	ACCUM	Program	An accumulator used for storing an (exponential) time to failure.
22	NFAIL1	Program	The number of the failure being scrutinized in the simulation.
23	RLINE (I)	Input/Output	The array containing the values for the reject line.
24	ALINE (I)	Input/Output	The array containing the values for the accept line.
25	MATRIX (I)	Input/Output	An array containing the test plan matrix.

APPENDIX III

FIGURE 8. CURVE SMOOTHING SCHEME (5-POINT)

FIGURE 9. CURVE SMOOTHING SCHEME (7-POINT)

Next Page is Blank.

SUBROUTINE SUB5

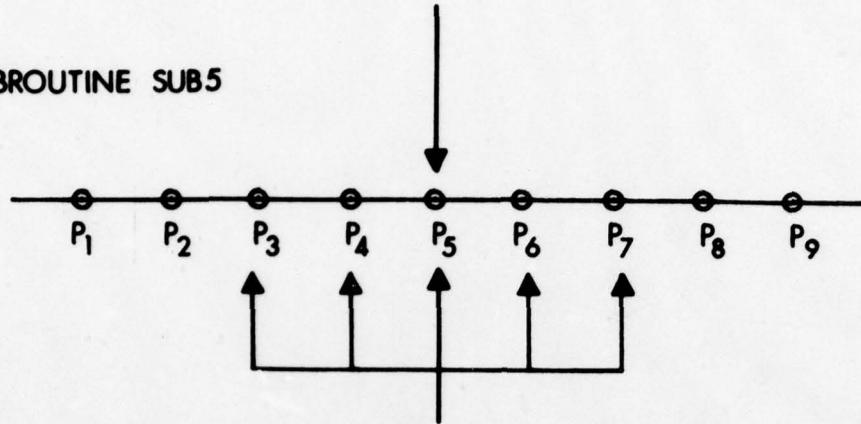


Figure 8. Curve Smoothing Scheme (5- Point)

SUBROUTINE SUB7

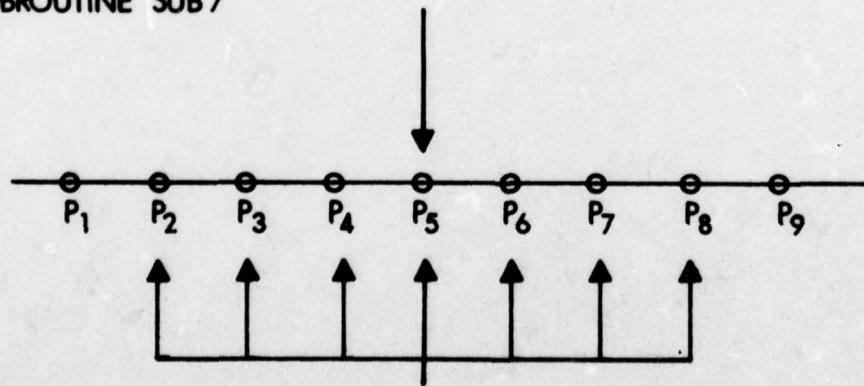


Figure 9. Curve Smoothing Scheme (7-Point)

APPENDIX IV
FIGURE 10. PROGRAM FLOW CHART

Next Page is Blank.




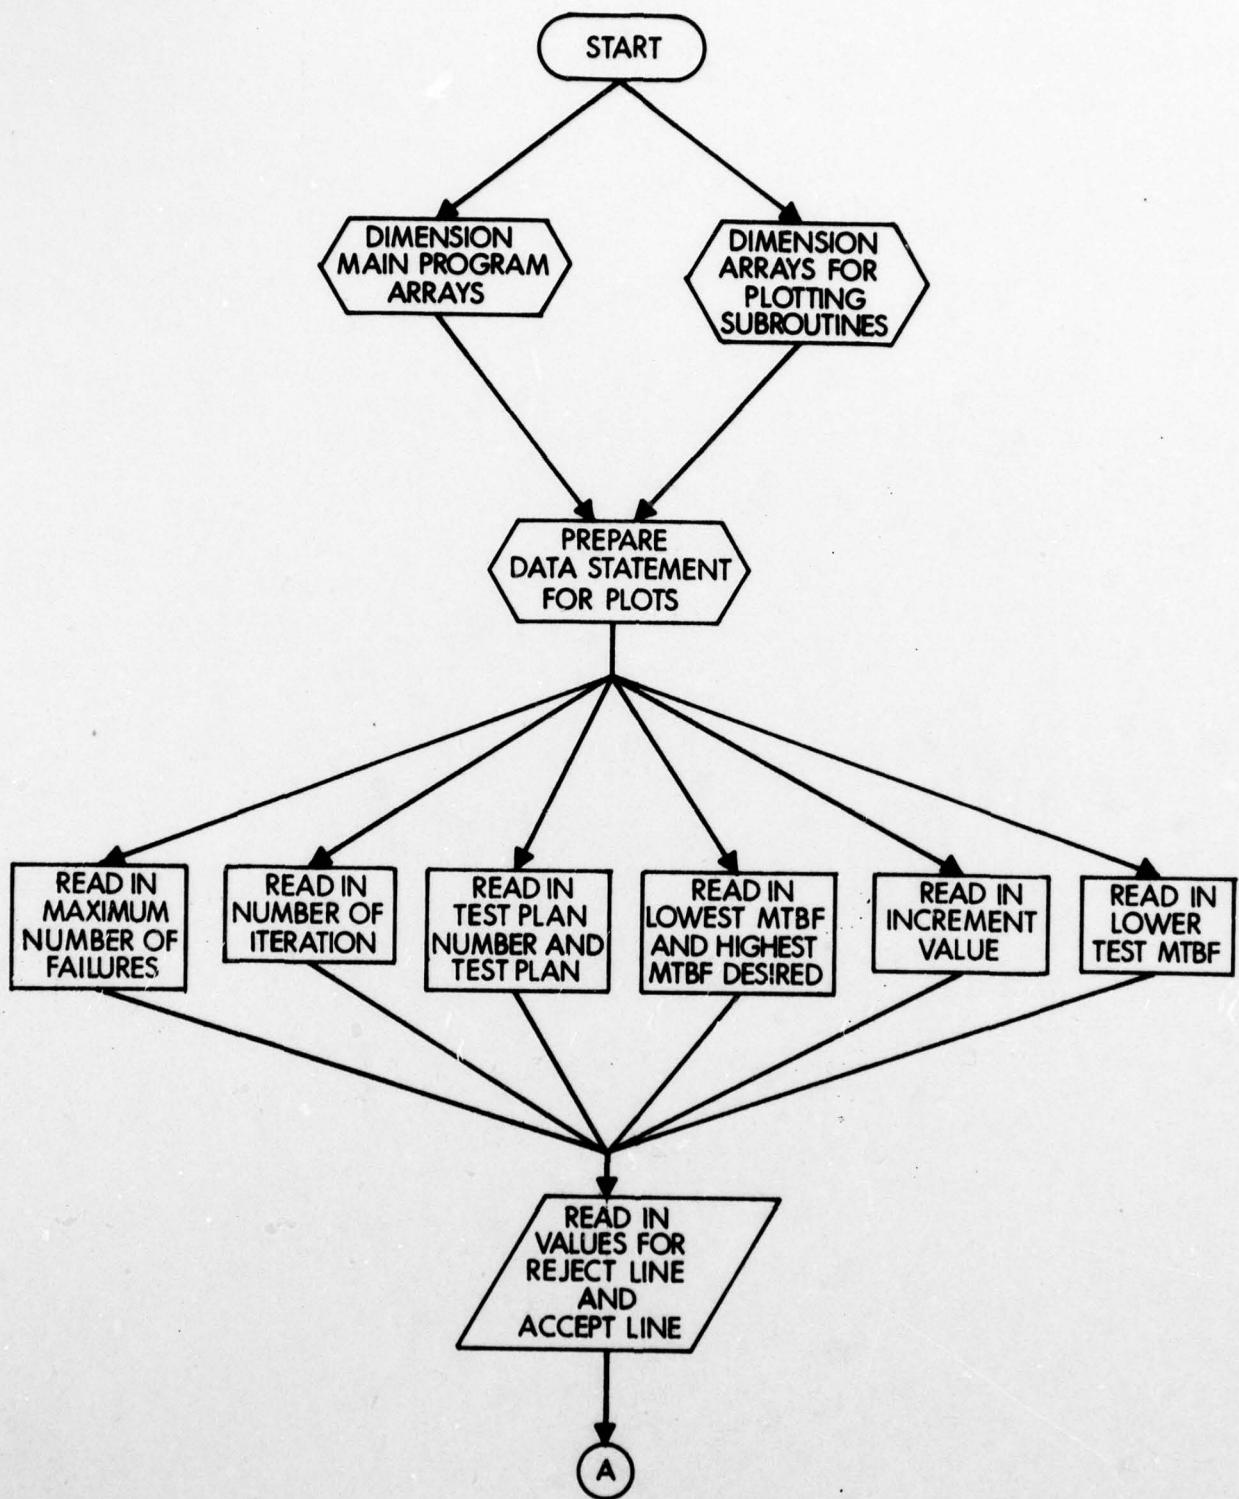


Figure 10. Program Flow Chart.

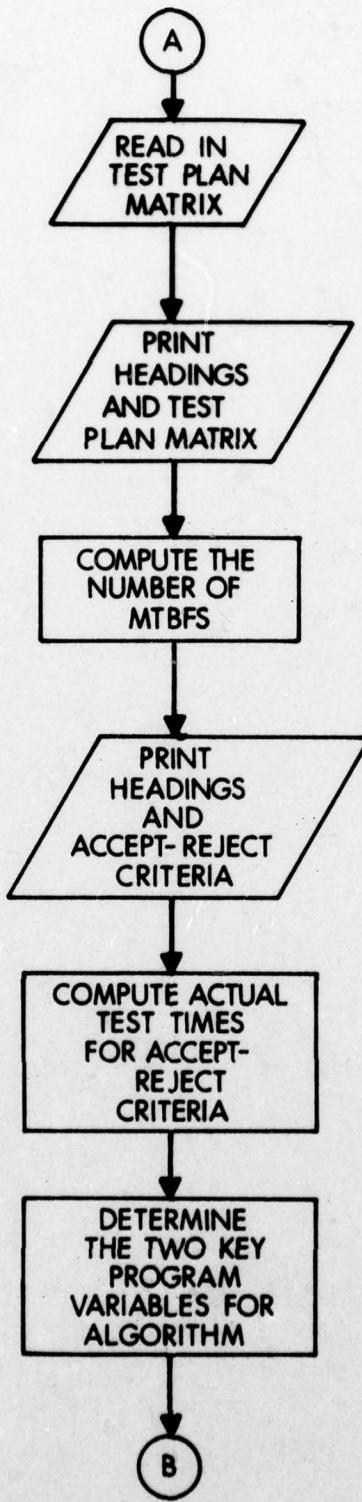

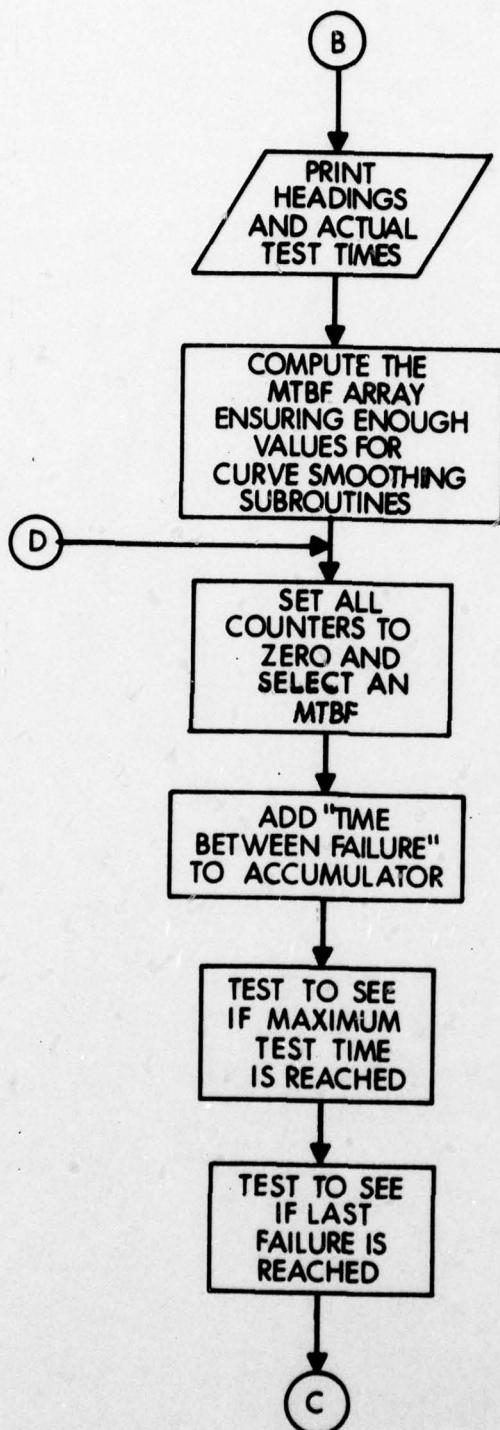

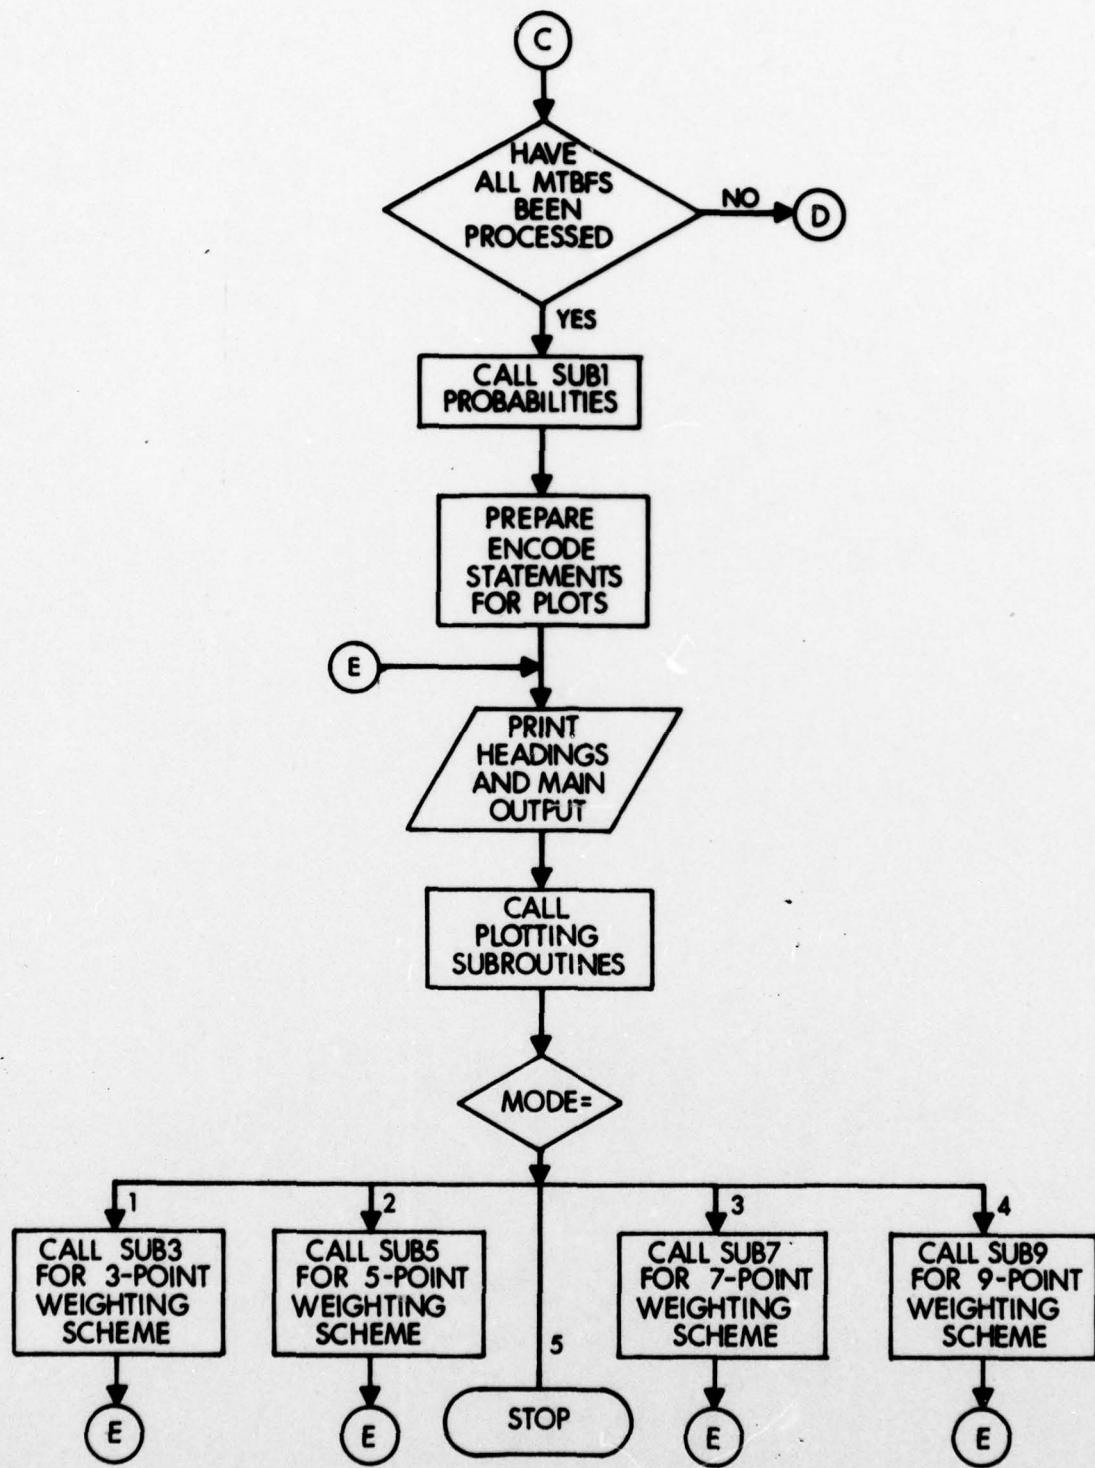

APPENDIX V
SUMMARY OF RESULTS - TEST PLANS I - VIII

Next Page is Blank.

APPENDIX V
SUMMARY OF RESULTS - TEST PLANS I - VIII

The following table and figures give a brief summary of results for test plans I through VIII. In each case, THETA ONE has been chosen as 100 hours MTBF. Figures Ia - VIIIA depict the probability of reaching the last failure, $P(F_L)$, while Figures Ib - VIIIB depict the probability of reaching the maximum test time, $P(T_M)$.

TABLE 6

SUMMARY OF RESULTS

Test Plan PRST	Decision Risks	Discrimination Ratio	Probability of Reaching Last Failure $P(F_L)$	Probability of Reaching Maximum Test Time $P(T_M)$
1	10%	1.5:1	.16 @ 0 ₁ .07 @ 0 ₀	.05 @ 0 ₁ .16 @ 0 ₀
2	20%	1.5:1	.12 @ 0 ₁ .08 @ 0 ₀	.12 @ 0 ₁ .21 @ 0 ₀
3	10%	2.0:1	.08 @ 0 ₁ .04 @ 0 ₀	.07 @ 0 ₁ .20 @ 0 ₀
4	20%	2.0:1	.10 @ 0 ₁ .07 @ 0 ₀	.10 @ 0 ₁ .28 @ 0 ₀
5	10%	3.0:1	.15 @ 0 ₁ .07 @ 0 ₀	.07 @ 0 ₁ .37 @ 0 ₀
6	20%	3.0:1	.86 @ 0 ₁ .38 @ 0 ₀	.13 @ 0 ₁ .39 @ 0 ₀
7	30%	1.5:1	.44 @ 0 ₁ .33 @ 0 ₀	.26 @ 0 ₁ .52 @ 0 ₀
8	30%	2.0:1	.80 @ 0 ₁ .49 @ 0 ₀	.09 @ 0 ₁ .26 @ 0 ₀

MIL-STD 781 C
TEST PLAN 1 C

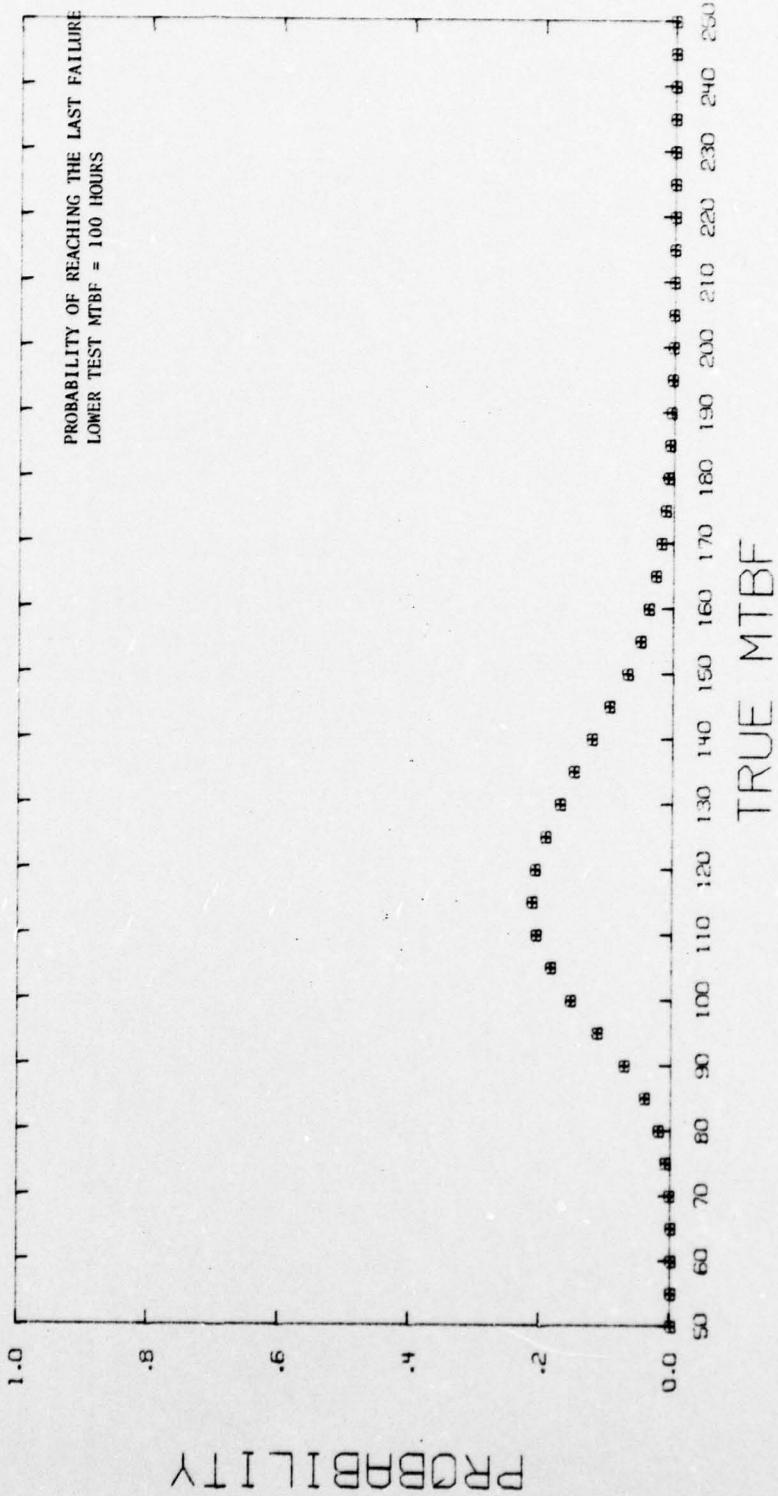


FIGURE 1A



PROBABILITY OF REACHING THE LAST FAILURE
LOWER TEST MTBF = 100 HOURS




FIGURE 2A

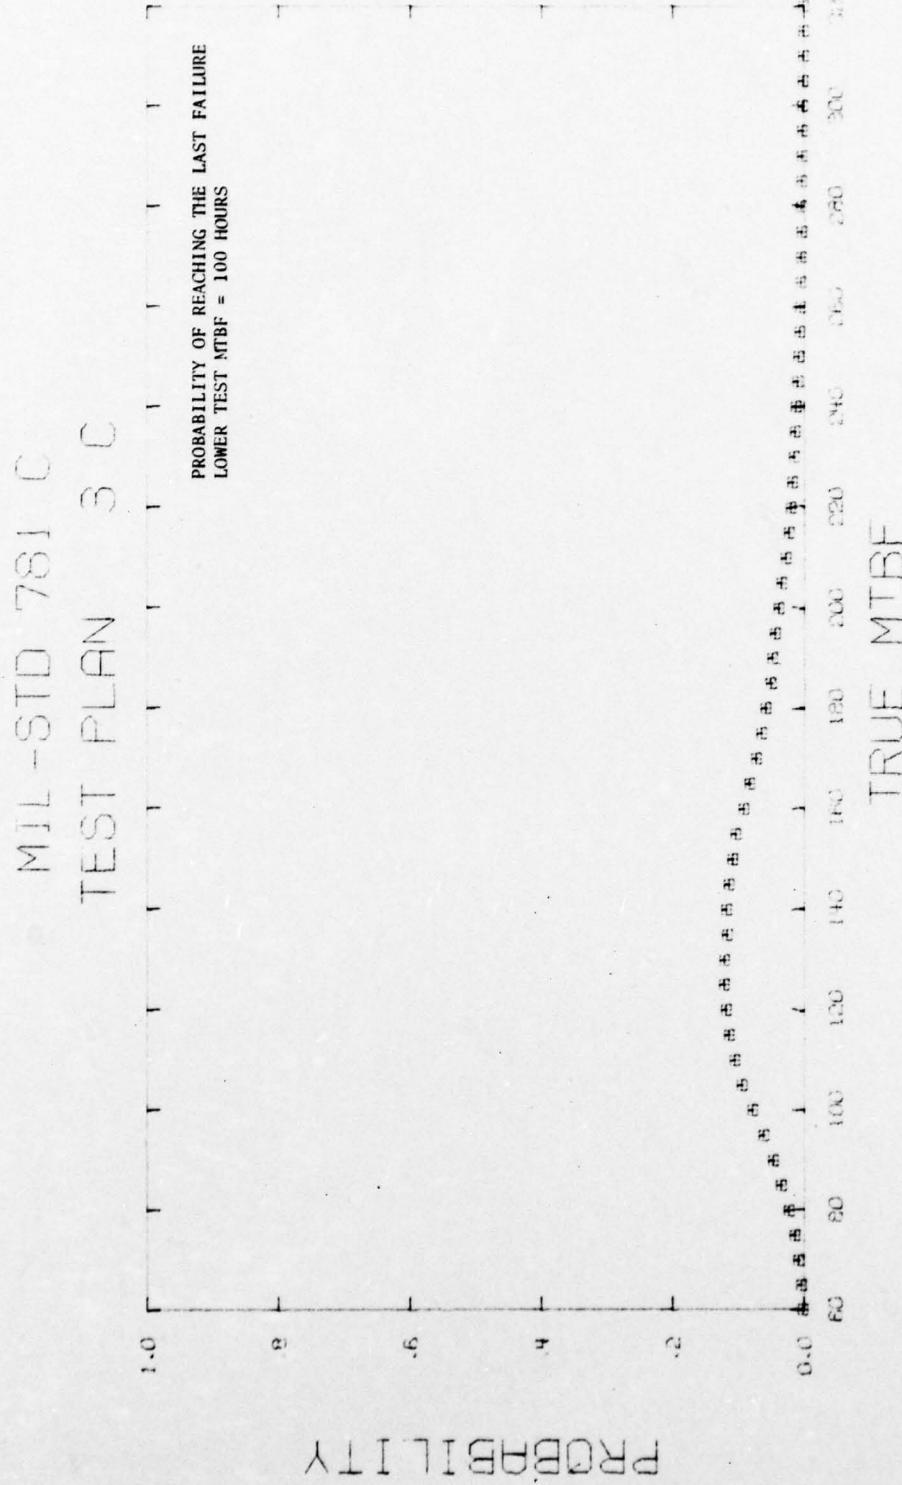


FIGURE 3A

MIL-STD 781 C
TEST PLAN 4 C

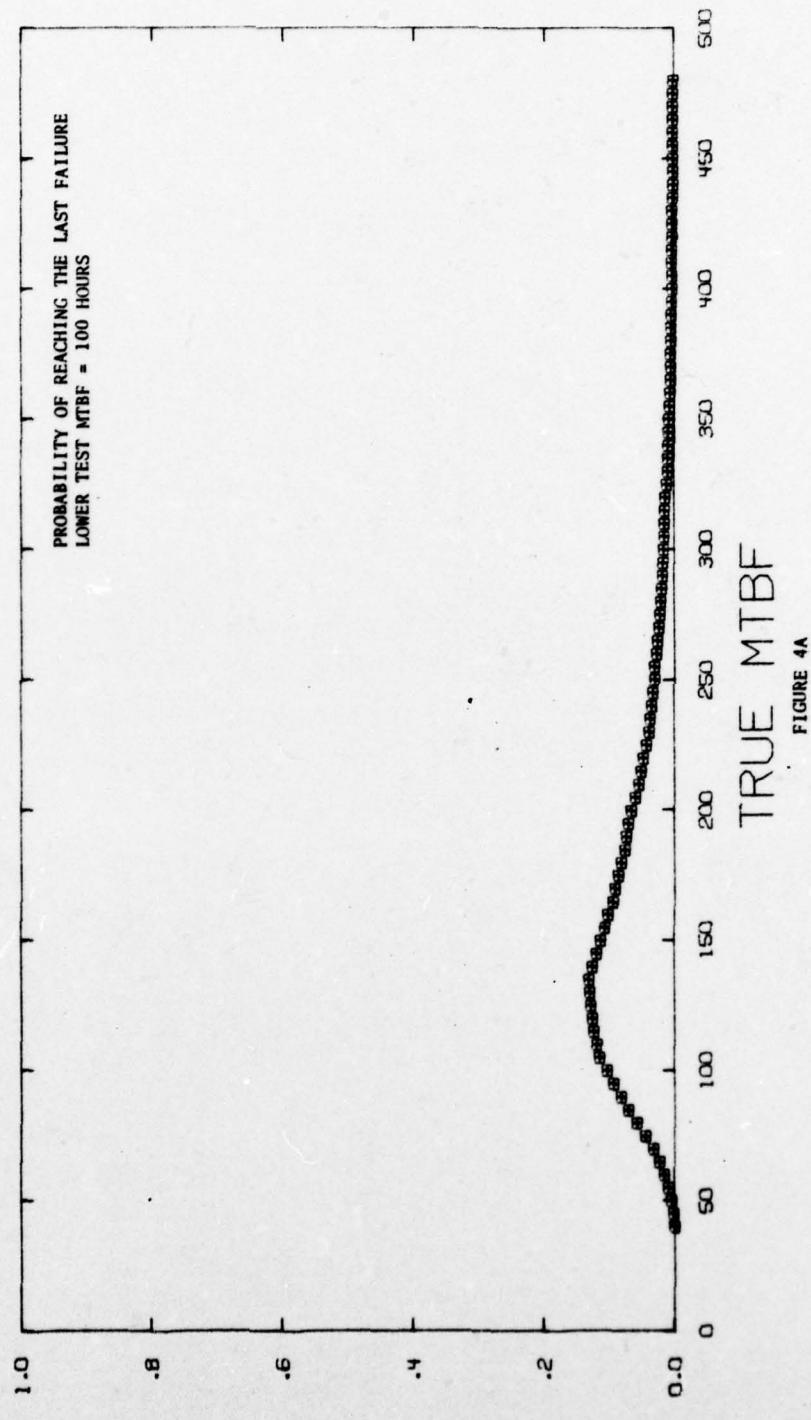


FIGURE 4A

MIL-STD 781 C
TEST PLAN 5 C

PROBABILITY OF REACHING THE LAST FAILURE
LOWER TEST MTBF = 100 HOURS

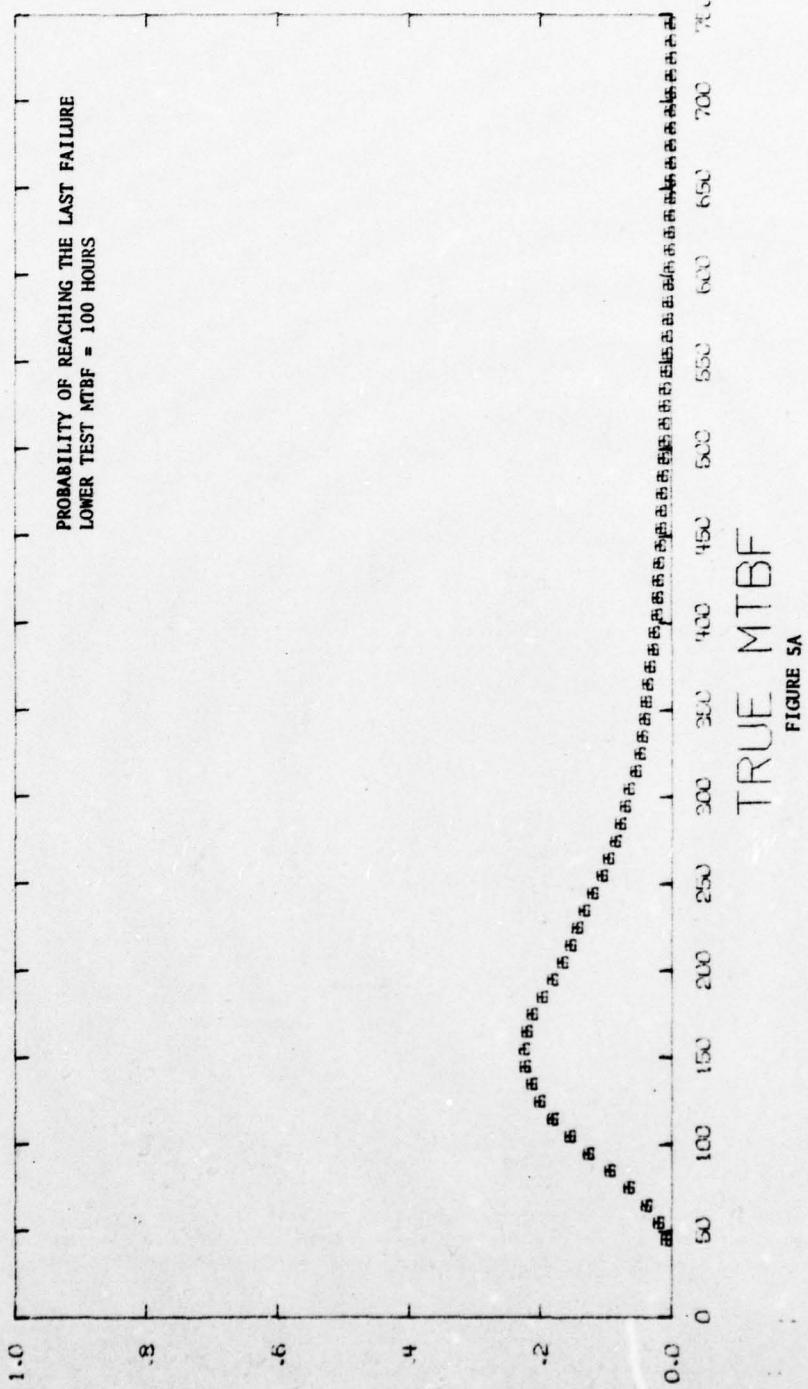


FIGURE 5A

MIL-STD 781 C
TEST PLAN 6 C

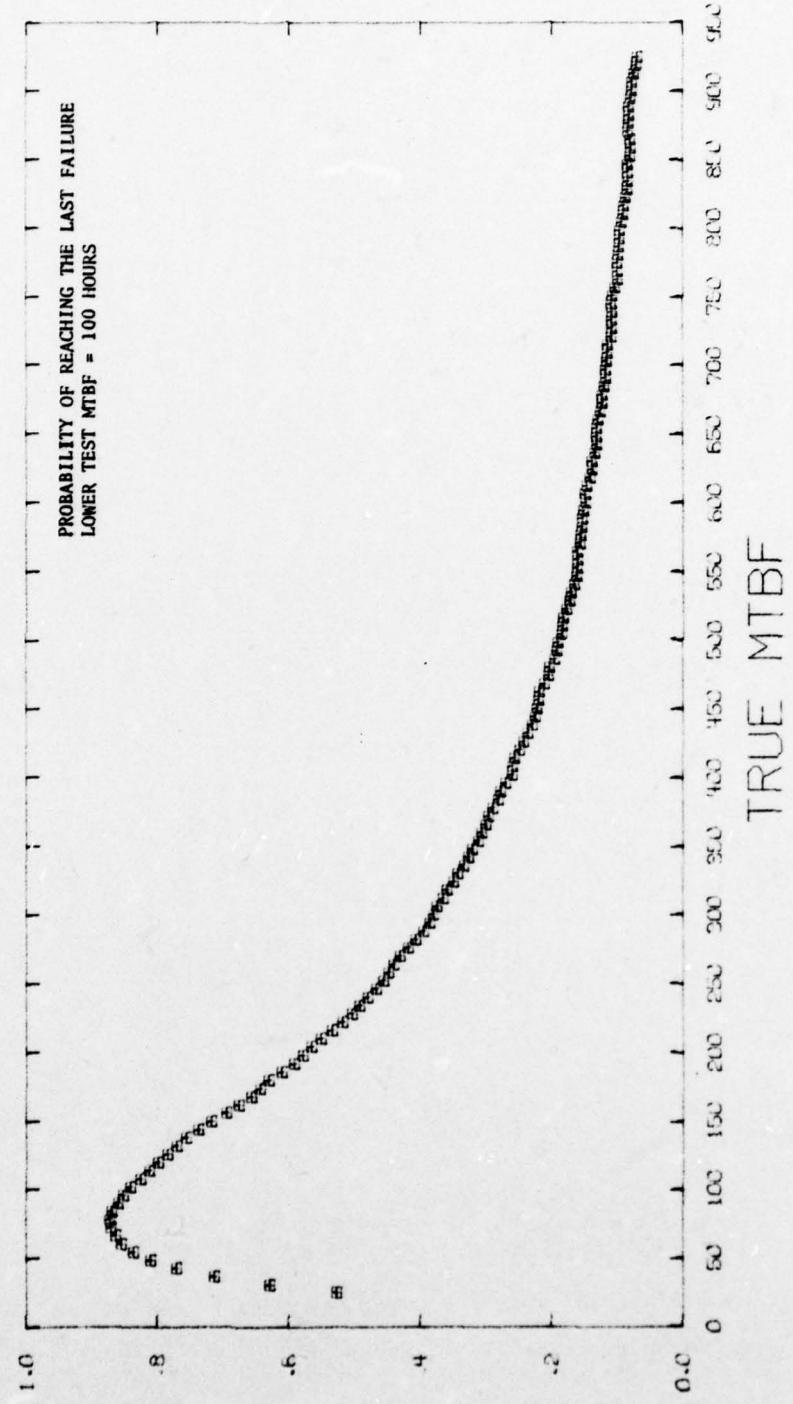


FIGURE 6A

PROBABILIT Y

MIL-STD 781 C
TEST PLAN 7 C

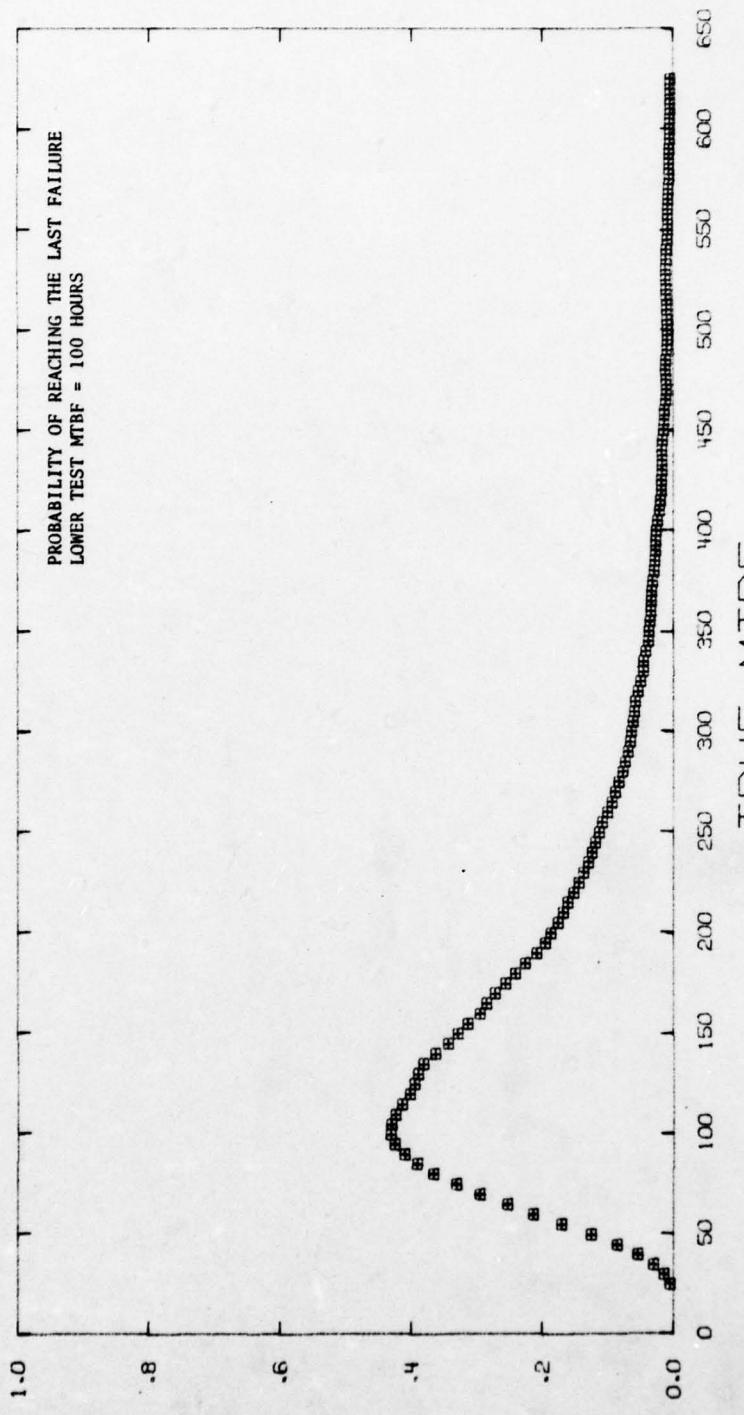


FIGURE 7A

MIL-STD 781 C
TEST PLAN 8C


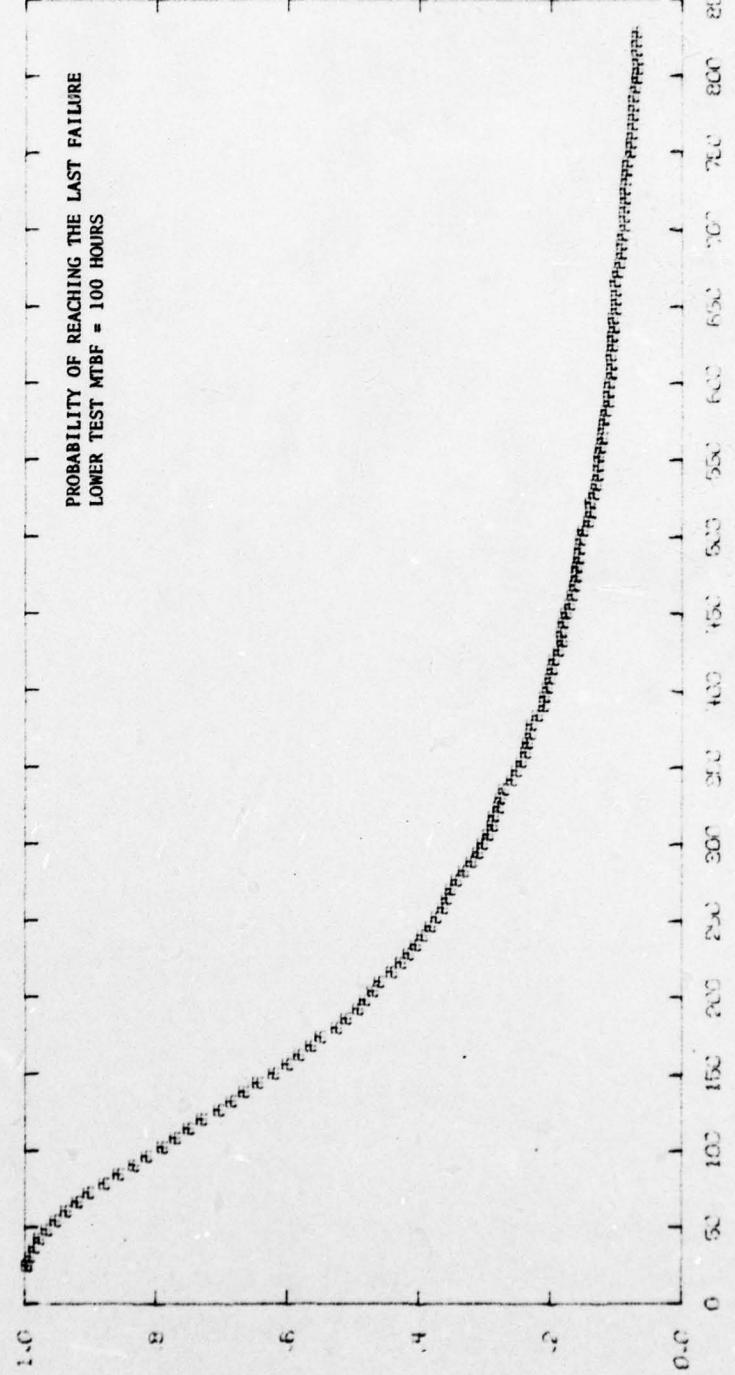


FIGURE 8A

MIL-STD 781 C
TEST PLAN 1 C

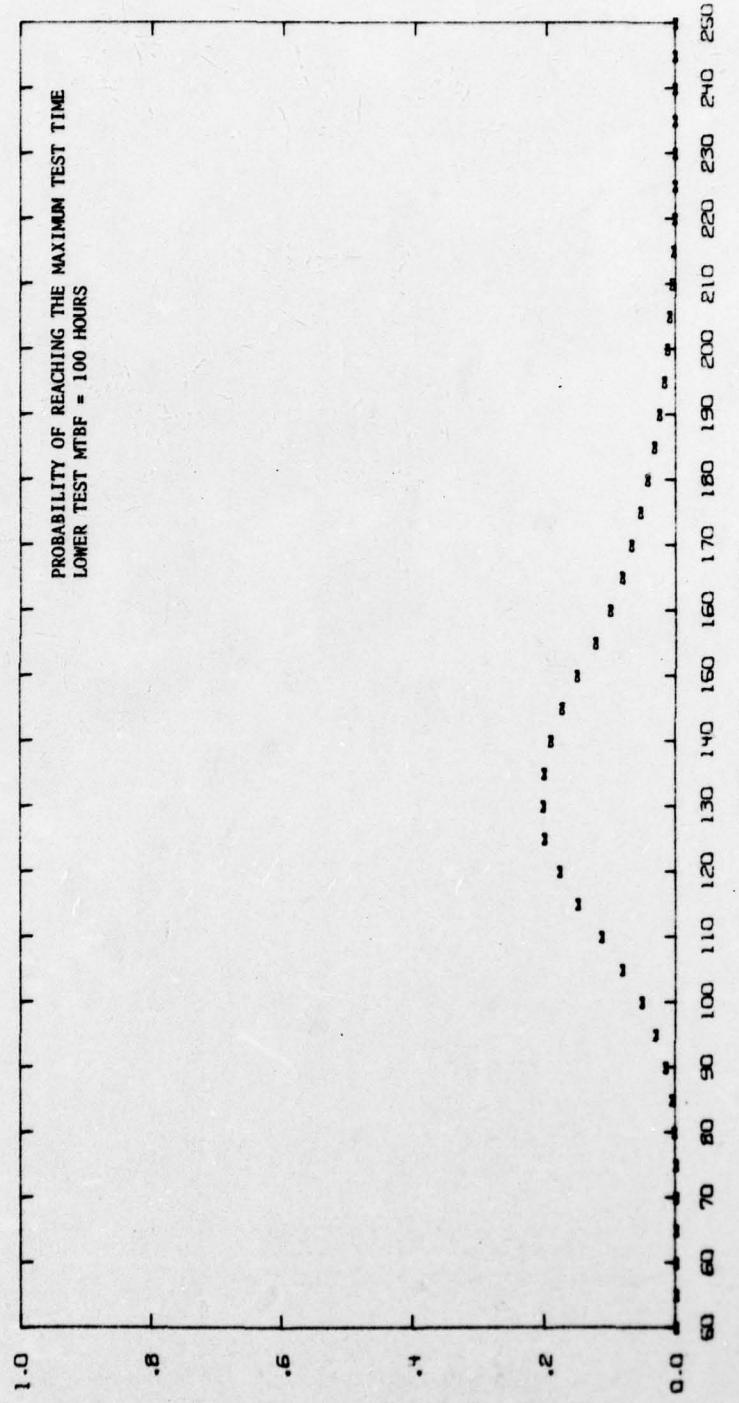

PROBABILITY

15

TRUE MTBF

FIGURE 1B

MIL-STD 781 C
TEST PLAN 2 C

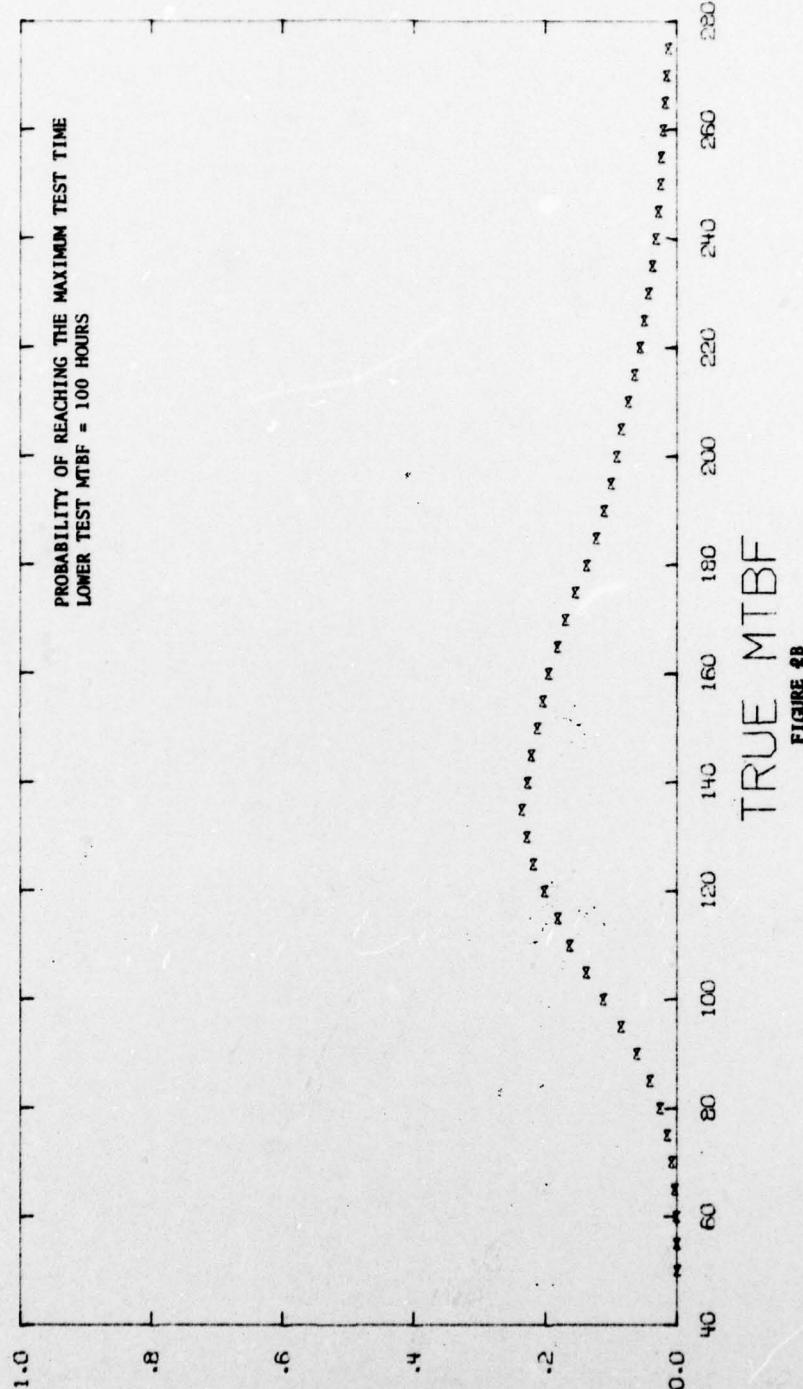


FIGURE 2B

MIL-STD 781 C
TEST PLAN 3 C

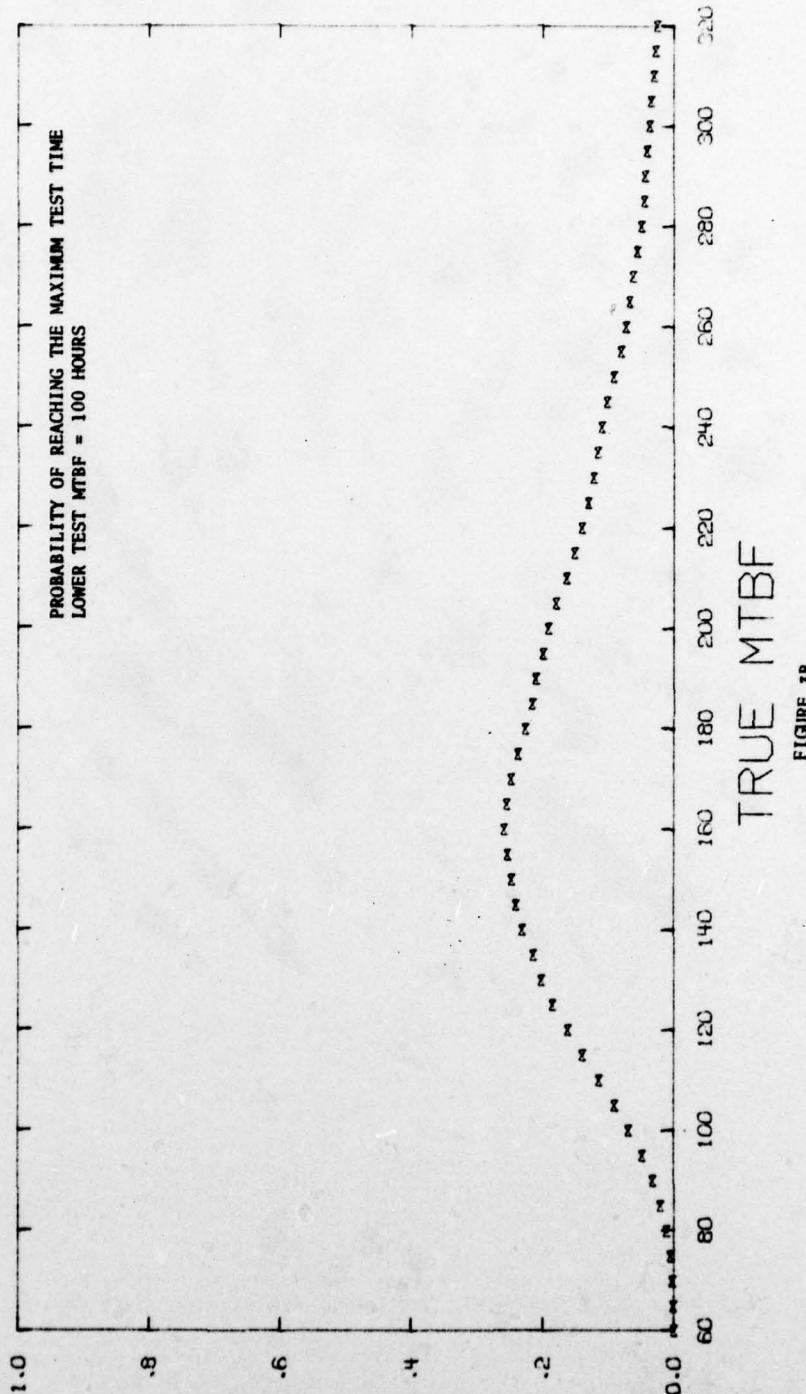


FIGURE 3B

MIL-STD 781 C
TEST PLAN 4 C


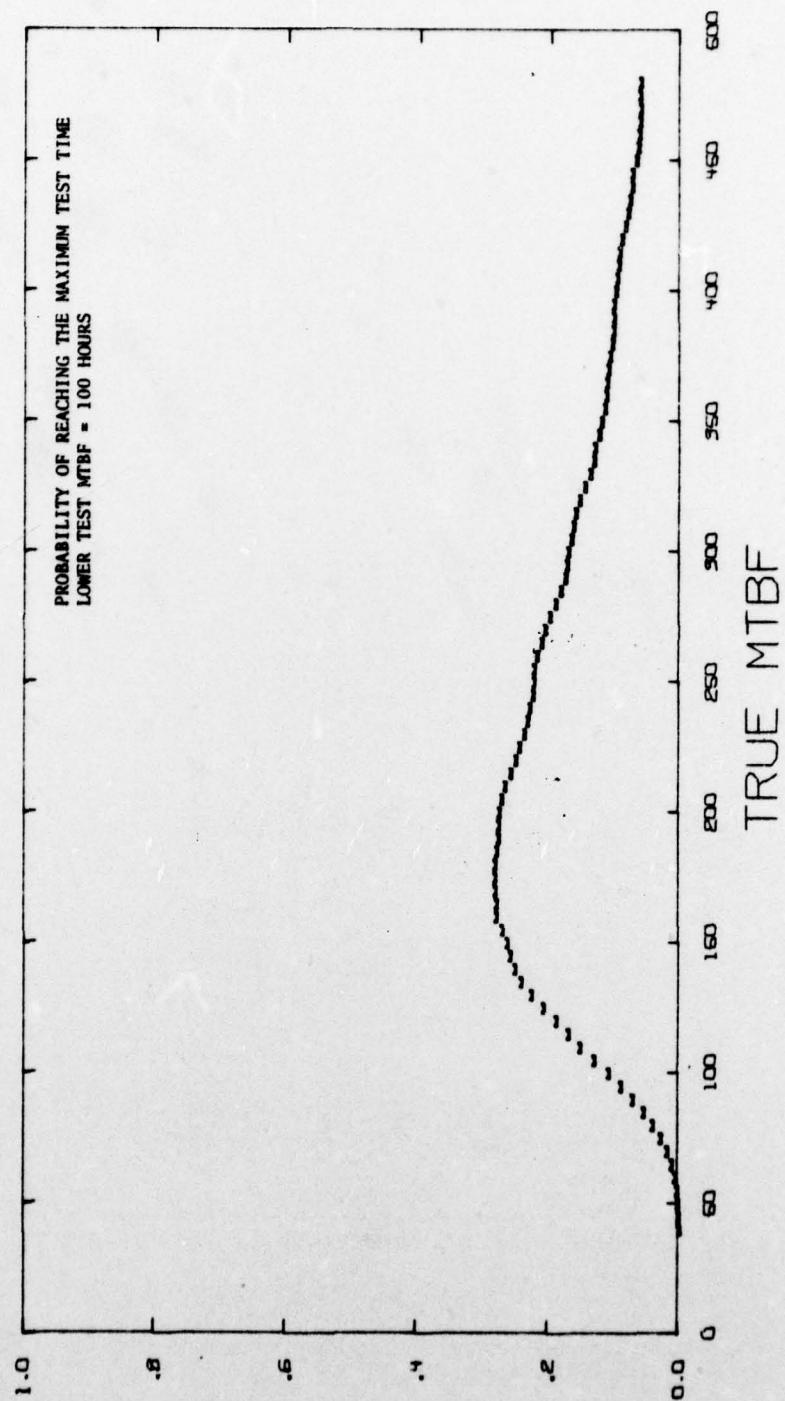


FIGURE 4B

MIL-STD 781 C
TEST PLAN 5 C

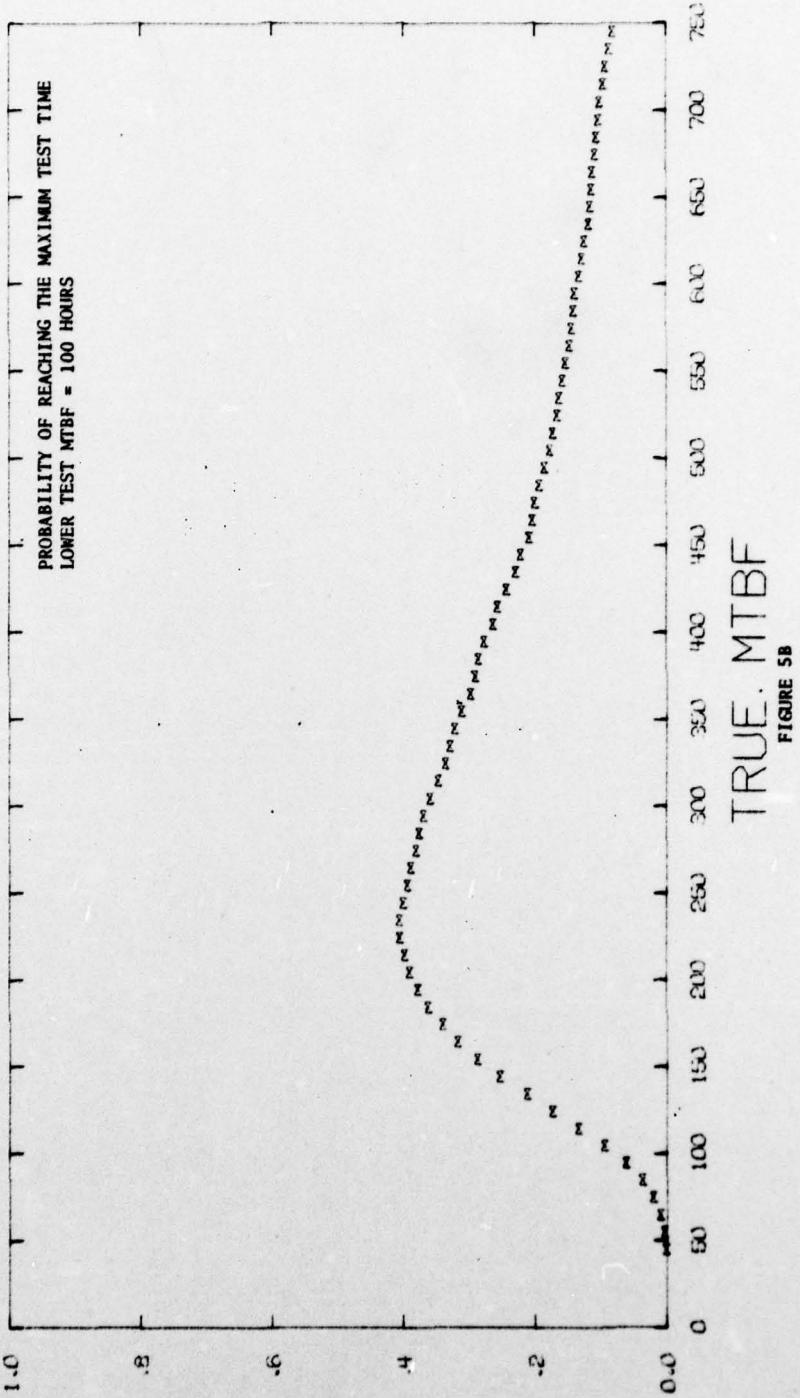

MIL-STD 781 C
TEST PLAN 6 C

PROBABILITY OF REACHING THE MAXIMUM TEST TIME
LOWER TEST MTBF = 100 HOURS


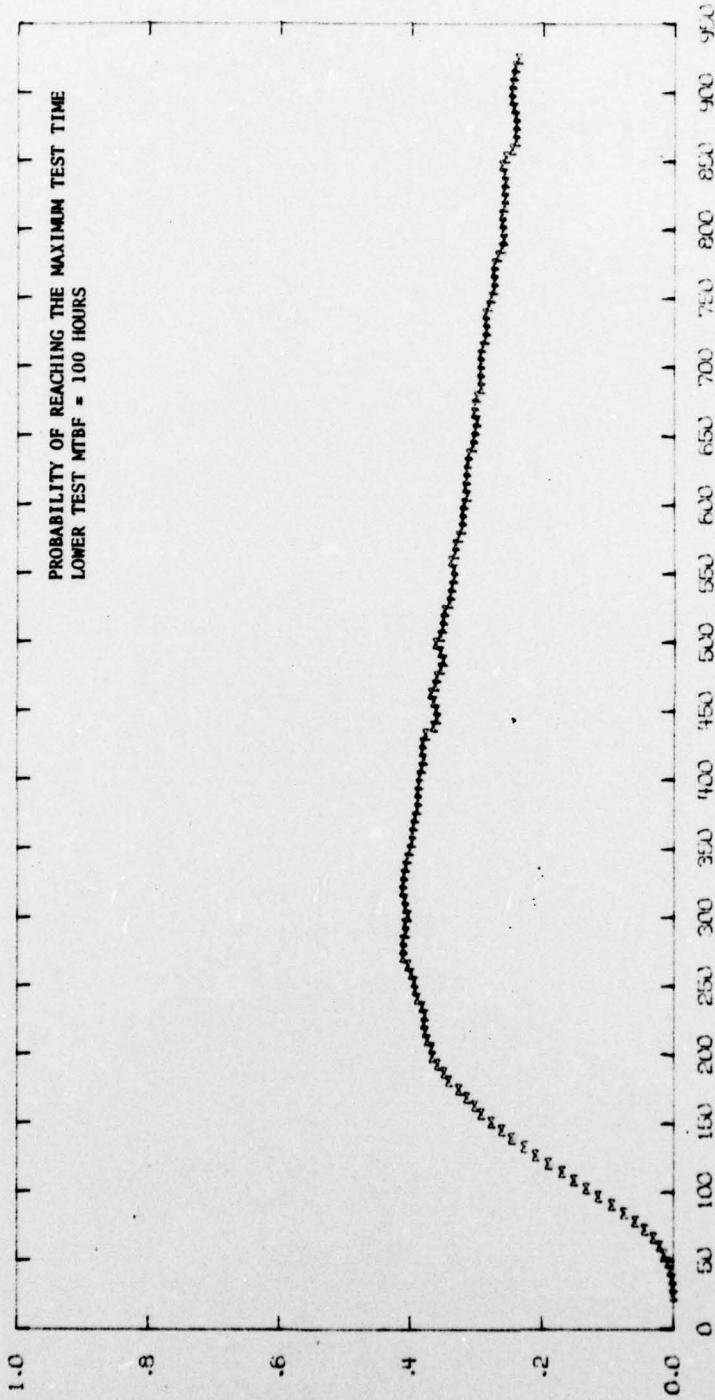


FIGURE 6B
TRUE MTBF

MIL-STD 781 C
TEST PLAN 7 C

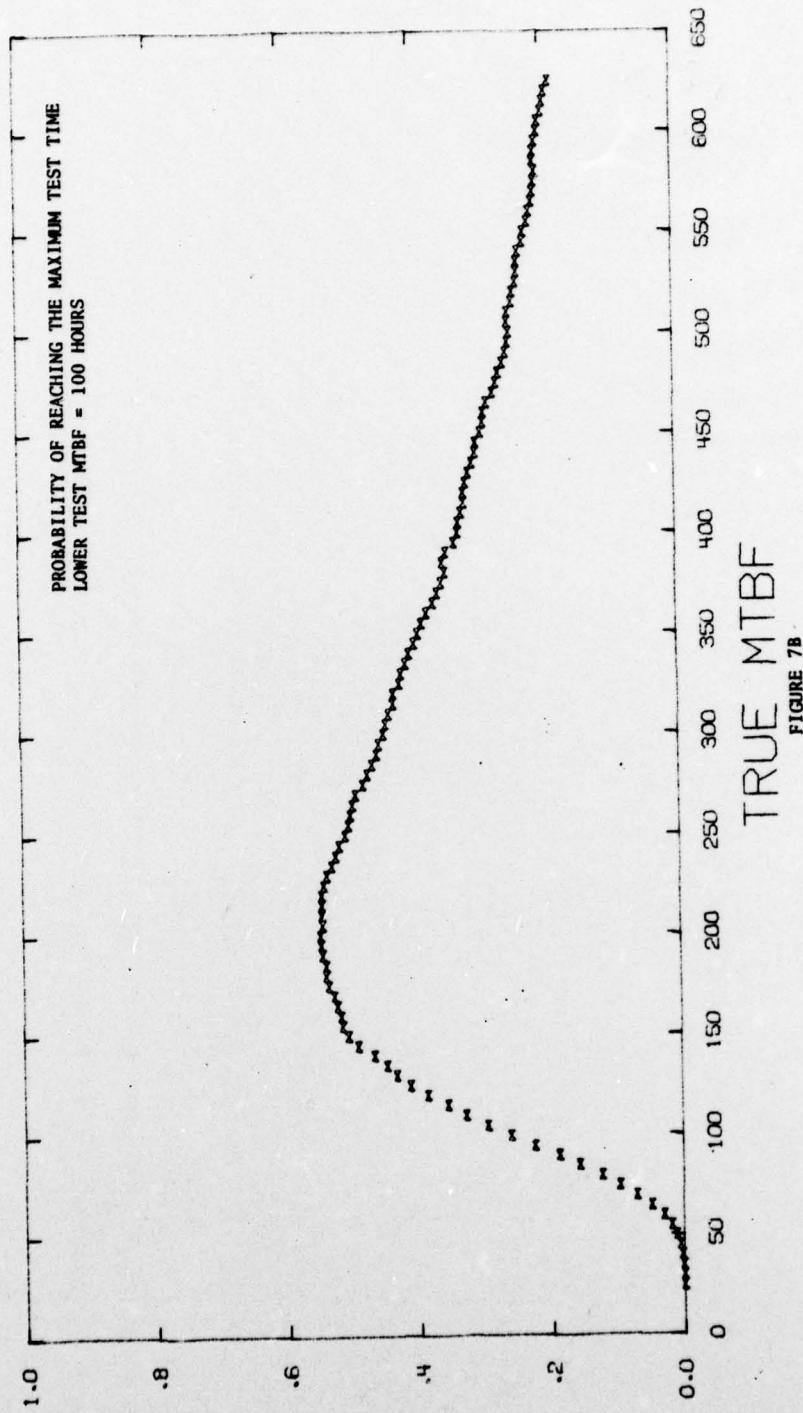


TRUE MTBF

FIGURE 7B

PROBABILITY

MIL-STD 781 C
TEST PLAN 8 C

PROBABILITY OF REACHING THE MAXIMUM TEST TIME
LOWER TEST MTBF = 100 HOURS

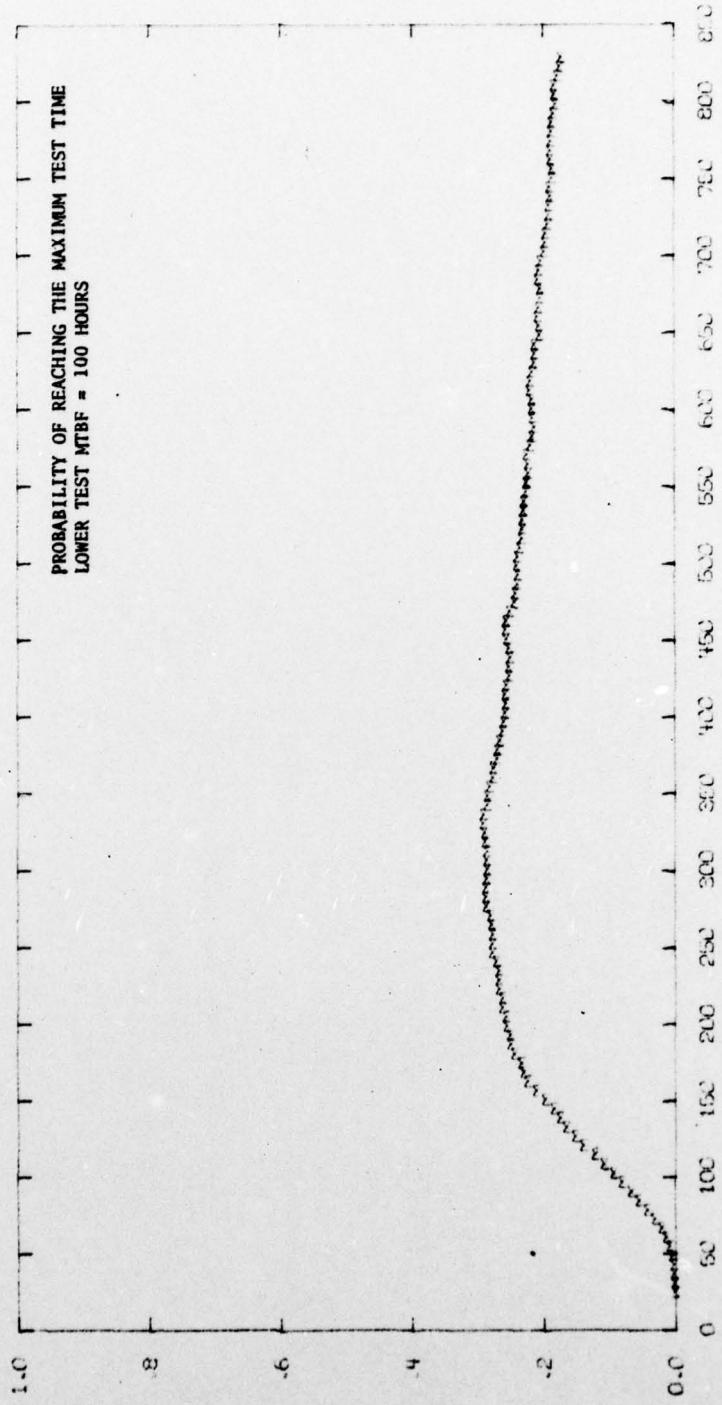

TRUE MTBF

FIGURE 8B

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
HILLY,T0N,STMFZ,H2.  
ACCOUNT(SAIHEL)  
REGIN,ATTACH,PLUTLH.  
REQUEST,TAPE13,OFH.  
FTN(G0,SL,ML,H)  
MAP(PAHT)  
HEGIN,PLOT,CALCUMP,TAPE13.  
EXIT.  
HEGIN,PLOT,CALCUMP,TAPE13.  
EXIT.  
?  
PROGRAM MSTRIC(INPUT,OUTPUT,TAPE1=INPUT,TAPE2=OUTPUT,TAPE13)  
C THIS PROGRAM IS A MONTE CARLO SIMULATION OF A PROBABILITY  
C RATIO SEQUENTIAL TEST (MSTR) PLAN FROM MILITARY  
C STANDARD 781C. THIS SIMULATION DETERMINES, FOR A  
C RANGE OF TRUE MTHFS, (1) THE PROBABILITY OF REACHING  
C MAXIMUM (TOTAL) TEST TIME BEFORE MAKING A DECISION  
C (EITHER ACCEPT OR REJECT) AND (2) THE PROBABILITY  
C OF REACHING THE LAST FAILURE. FOUR SUBROUTINES ARE  
C INTRODUCED INTO THE PROGRAM FOR THE EXPRESS PURPOSE  
C OF PERFORMING CURVE SMOOTHING. THIS PROCEDURE IS  
C ACCOMPLISHED WITH THE AID OF FOUR DIFFERENT WEIGHTING  
C SCHEMES, UTILIZING (1) A NEIGHBOURHOOD OF THREE POINTS,  
C (2) A NEIGHBOURHOOD OF FIVE POINTS, (3) A NEIGHBOURHOOD  
C OF SEVEN POINTS, AND (4) A NEIGHBOURHOOD OF NINE POINTS.  
C  
INTEGER NOF(200)  
REAL HLINE(200),ALINE(200)  
REAL TMTMF(500),MTMF(500)  
REAL MATRIX(25,3),D(2)  
REAL TITLE1(1),TITLE2(2)  
REAL TITLE3(2),TITLE4(2)  
REAL TITLE5(5),TITLE6(6)  
DIMENSION TITLE7(4),LAHEL(4)  
COMMON AKOUNT(500),BKOUNT(500)  
COMMON CKOUNT(500),DKOUNT(500)  
DATA LABEL//'RHOEMM','SAIHEL','B367','A3588'/  
DATA NUPLOT/0/  
HEAD(5,10)MAXNHF,NHITER,NHTP,NHPLNS,BASE,VALUE,DELTMA,THETA1  
10 FORMAT(4I10.4F10.2)  
INTVLS=MAXNHF+1  
HEAD(5,20)(HLINE(I),I=1,INTVLS)  
20 FORMAT(BF10.2)  
HEAD(5,20)(ALINE(I),I=1,INTVLS)  
DO 30 K=1,INTVLS  
NUF(K)=K-1  
30 CONTINUE  
DO 50 K=1,NHPLNS  
HEAD(5,40)MATRIX(K,1),MATRIX(K,2),MATRIX(K,3)  
40 FORMAT(3F10.2)  
50 CONTINUE  
WHITE(6,60)  
60 FORMAT('1',T38,'MILITARY STANDARD 781 C//T78,  
$THE MINIMUM NUMBER//T79,'OF FAILURES FROM//T4,  
$TEST PLAN//T24,'MAXIMUM NUMBER//T49,  
$MAXIMUM TEST TIME//T40,'WHICH TO REACH//T6,  
$NUMBER//T25,'OF FAILURES//T48,'(THETA ONE //T59,  
$MULTIPLE) //T79,'MAXIMUM TEST TIME//T4,  
$10(1-1),T24,14(1-1),T48,20(1-1),T78,16(1-1))  
WHITE(6,70)(L,MATRIX(L,1),MATRIX(L,2),MATRIX(L,3),L=1,NHPLNS)  
70 FORMAT('0',T7,I3,T29,F5.0,T53,F10.2,T85,F5.0)  
RNMTMF=(VALUE-BASE)/DELTAX+1  
IF(RNMTMF.GT.AINT(RNMTMF))GOTO 80  
RNMTMF=RNMTMF  
GOTO 90
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
80 NMTHF=NMTHF+1.0
90 WRITE(6,100)
100 FORMAT(*1,T4,'MILITARY STANDARD TH1 C')
    WRITE(6,110)NHTP
110 FORMAT(*0,T4,'TEST PLAN ',I3)
    WRITE(6,120)MAXNMF
120 FORMAT(*0,T4,'THE MAXIMUM NUMBER OF FAILURES ')
    $10M THIS PLAN IS ',I4///)
    WRITE(6,130)
130 FORMAT(*1,T22,'ACCEPT-REJECT CRITERIA')/T22.
    $22(*-*)
    WRITE(6,140)
140 FORMAT(*0,T34,'TOTAL TEST TIME')
    WRITE(6,150)
150 FORMAT(*1,T31,'(THETA ONE MULTIPLE)')
    WRITE(6,160)
160 FORMAT(*0,T4,'NUMBER OF /T4.,'FAILURES',T26.
    $10(-1),T26,12(-1),T46,12(-1))
    DO 190 K=1,INTVLS
    IF(MOD(K,20).EQ.0)WHITE(6,170)
    WRITE(6,180)NUF(K),RLINE(K),ALINE(K)
170 FORMAT(*1,T4,'NUMBER OF /T4.,'FAILURES',T26.
    $10(-1),T26,12(-1),T46,12(-1))
    $10(-1),T26,12(-1),T46,12(-1))
180 FORMAT(*0,T11,14,T27,F10.2,T47,F10.2)
190 CONTINUE
    DO 200 K=1,INTVLS
    HLINE(K)=RLINE(K)*THETA1
    ALINE(K)=ALINE(K)*THETA1
200 CONTINUE
    DO 210 L=1,NRPLNS
    MATRIX(L,2)=MATRIX(L,2)*THETA1
210 CONTINUE
    DO 220 K=1,NRPLNS
    IF(MAXNMF.EQ.0)IFIX(MATRIX(K,1)))UPPER=MATRIX(K,2)
    IF(MAXNMF.EQ.0)IFIX(MATRIX(K,1)))LIMIT=MATRIX(K,3)
220 CONTINUE
    WRITE(6,100)
    WRITE(6,110)NHTP
    WRITE(6,230)THETA1
230 FORMAT(*0,T4,'THETA ONE FOR THIS PLAN IS ',
    ST32,F10.2,T46,'HOURS')
    WRITE(6,240)UPPER
240 FORMAT(*0,T4,'THE MAXIMUM TEST TIME FOR THIS ')
    $10PLAN IS ',F10.2,T56,'HOURS')
    WRITE(6,250)HASE,VALUE
250 FORMAT(*0,T4,'THE RANGE OF TRUE MTRFS CONSIDERED ')
    $10IS ',F10.2,' - ',F10.2,T56,'HOURS')
    WRITE(6,260)NHTP
260 FORMAT(*0,T4,'THE NUMBER OF ITEMS FOR THIS ')
    $10SIMULATION IS ',I10)
    WRITE(6,120)MAXNMF
    WRITE(6,130)
    WRITE(6,140)
    WRITE(6,140)
    DO 270 K=1,INTVLS
    IF(MOD(K,10).EQ.0)WHITE(6,170)
    WRITE(6,180)NUF(K),RLINE(K),ALINE(K)
270 CONTINUE
    BASE=HASE-4,DELTAX
    IF(HASE.LE.0,)GOTO 540
    NUM=NHTP+1
    DO 280 K=1,NUM
    TMTHF(K)=HASE
    BASE=BASE+DELTAX
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
240 CONTINUE
K=0
250 K=K+1
NCASE=0
ARG=1./TMTBF(K)
KOUNT=0
KNT=0
300 NCASE=NCASE+1
IF(NCASE.GT.NWHITEH)GOTO 360
ACUM=0.
DO 340 NFAIL=1,INTVLS
NFAIL1=NFAIL-1
IF(NFAIL1.EQ.1)GOTO 320
310 ACUM=ACUM+EXPN(ARGV)
IF(ACUM.EQ.0.)GOTO 310
IF(NFAIL1.EQ.0.AND.ACUM.GE.ALIN(NFAIL))GOTO 350
IF(NFAIL1.EQ.0.AND.(ACUM.GT.RLINE(NFAIL).AND.
ACUM.LT.ALIN(NFAIL)))GOTO 340
320 DO 330 J=LIMIT,MAXNRF
IF(NFAIL1.EQ.J.AND.ACUM.GE.UPPER)KOUNT=KOUNT+1
330 CONTINUE
IF(NFAIL1.EQ.MAXNRF)KNT=KNT+1
IF(ACUM.LE.RLINE(NFAIL).OR.ACUM.GE.ALIN(NFAIL))GOTO 350
340 CONTINUE
350 GOTO 300
360 AKOUNT(K)=KOUNT
RKOUNT(K)=KNT
IF(K.NE.NUMH)GOTO 290
TITLE1(1)='TRUE MTBF'
TITLE2(1)='PROBABILITY'
TITLE2(2)='Y'
TITLE4(1)='MIL-STD 78'
TITLE4(2)='I C'
CALL SUHI(NWHITEH,NRMTBF)
MODE=0
LEVELS=NRMTBF/15
IF(MOD(NRMTBF,15).GT.0)LEVELS=LEVELS+1
IF(LEVELS.LE.0)LEVELS=1
ENCODE(16,370,TITLE3)NRTH
370 FORMAT(10HTEST PLAN ,I3.3H C>)
ENCODE(6P,3H0,TITLE5)MAXNRF
380 FORMAT(62HPROBABILITY OF REACHING THE LAST FAILURE (.I4,2H)>)
ENCODE(59,390,TITLE6)UPPER
390 FORMAT(63HPROBABILITY OF REACHING MAXIMUM TEST TIME (.F10.2,
SAM HRS)>)
ENCODE(35,400,TITLE7)THETA1
400 FORMAT(1HLOWE TEST MTBF = .F10.2,7H HOURS>)
D(1)=TMTBF(S)*1.0001
D(2)=TMTBF(NRMTBF+4)*.99999
DO 410 N=1,NRMTBF
MTBF(N)=TMTBF(N+4)
410 CONTINUE
XA=3.
420 JUMP1
INTVLS
DO 470 M=1,LEVELS
WHITE(6,430)NRTP,THETA1
430 FORMAT(11,T55,'MIL-STD 781 C/T54,
8 TEST PLAN ',I3.'C'/T67,'THETA ONE = ',
SF10.2.' HOURS')///
#HTE(6,440)UPPER,MAXNRF
440 FORMAT(11,T48,'PROBABILITY OF REACHING ',T77,
8 PROBABILITY OF REACHING ',T30,'TRUE MTBF ',T51,
8 MAXIMUM TEST TIME ',T80,'THE LAST FAILURE ',T32,
8 '(HOURS)',T50,'(.,F10.2,T63,'HOURS')',T79,
8 '(FAILURE NR. ',I4,')',T30,11('=-'),T4H,23('=-'),T77,
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```
$23(*-*)  
DO 460 NZJUMP,INTO  
IF(N.GT.NHMTBF)GOTO 470  
JMTBF=N+4  
WHITE(6,450)TMTBF(JMTBF),CKOUNT(N),DKOUNT(N)  
450 FORMAT('1',T31,F10.2,T57,F6.4,T86,F6.4)  
460 CONTINUE  
JUMP=JUMP+15  
INTO=INTO+15  
470 CONTINUE  
IF(NOPLOT.EQ.1)GOTO 490  
IF(MODE.GT.0)GOTO 480  
CALL PLTBEG(72.,25.,1.0,13,LABEL)  
CALL FIASCA(0(1),2.10.,0$,UMIN,UMAX,DELD)  
480 CALL PLTSCA(XX,2.,UMIN,0.,0$,0.)  
CALL PLTTOTS(3,10,MTHF,CKOUNT,NHMTBF,0)  
CALL PLTAXS(DELD..2,DMIN,DMAX,0.0,1.0,4)  
CALL LABELA(DELD..2,UMIN,UMAX,0..1..1..1..1)  
CALL PLTSCA(XX,2..0..0..0$,0.)  
CALL PLTTOTS(3,10,2.05*0$,1.45,1.0)  
CALL PLTTOTS(3,14,2.05*0$,1.55,1.0)  
CALL PLTSYM(.25,TITLE1,0..3.875*0$,-.15)  
CALL PLTSYM(.25,TITLE2,90..-0$,.225)  
CALL PLTSYM(.25,TITLE3,0..3.125*0$,1.05)  
CALL PLTSYM(.25,TITLE4,0..3.375*0$,1.15)  
CALL PLTSYM(.10,TITLE7,0..2.05*0$,1.35)  
CALL PLTSYM(.10,TITLE6,0..2.25*0$,1.45)  
CALL PLTSYM(.10,TITLE5,0..2.25*0$,1.55)  
CALL PLTSCA(XX,11.75,UMIN,0.,0$,0.)  
CALL PLTTOTS(3,14,MTHF,CKOUNT,NHMTBF,0)  
CALL PLTAXS(DELD..2,DMIN,DMAX,0..1..4)  
CALL LABELA(DELD..2,DMIN,DMAX,0..1..1..1..1)  
CALL PLTSCA(XX,11.75,0.,0..0$,0.)  
CALL PLTSYM(.25,TITLE1,0..3.875*0$,-.15)  
CALL PLTSYM(.25,TITLE2,90..-0$,.225)  
CALL PLTSYM(.25,TITLE3,0..3.125*0$,1.05)  
CALL PLTSYM(.25,TITLE4,0..3.375*0$,1.15)  
490 MODE=MODE+1  
GOTO(500,510,520,530,560),MODE  
500 CALL SUH3(NHITER,NHMTBF,NUMR)  
XX=17.  
GOTO 420  
510 CALL SUH5(NHMTBF)  
XX=31.  
GOTO 420  
520 CALL SUH7(NHMTBF)  
XX=45.  
GOTO 420  
530 CALL SUH9(NHMTBF)  
XX=59.  
GOTO 420  
540 WHITE(4,550)DELTAX  
550 FORMAT('1',T4,'THE INCREMENT VALUE CHOSEN (',F10.2,  
$1) FUN THE RANGE OF TRUE MTHFS CONSIDERED WAS TOO LANGE.'//T4,  
$1CHOOSE A SMALLER INCREMENT VALUE SUCH THAT THE INCREMENT '  
$1VALUE MULTIPLIED BY FOUR (4) AND THEN SUBTRACTED'//T7,  
$1FROM YOUR BASE MTHF WILL RESULT IN A NUMBER THAT IS '  
$1GREATER THAN ZERO.')  
560 CALL PLTPGE  
STOP  
END  
SUBROUTINE SUB1(NHITER,NHMTBF)  
COMMON AKOUNT(400),BKOUNT(500)  
COMMON CKOUNT(500),DKOUNT(500)  
NHITER=NHITER  
DO 5 NB1,NHMTBF
```

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

```

CKOUNT(N)=AKOUNT(N+4)/ARITER
DKOUNT(N)=BKOUNT(N+4)/ARITER
5 CONTINUE
RETURN
END
SUBROUTINE SUM3(NRITER,NRMTHF,NUMH)
COMMON AKOUNT(500),BKOUNT(500)
COMMON CKOUNT(500),DKOUNT(500)
ARITER=NRITER
DO 5 K=1,NUMH
AKOUNT(K)=AKOUNT(K)/ARITER
BKOUNT(K)=BKOUNT(K)/ARITER
5 CONTINUE
DO 10 I=1,NRMTBF
CKOUNT(I)=(AKOUNT(I+3)+AKOUNT(I+5))/4.+*(AKOUNT(I+4))/2.
DKOUNT(I)=(BKOUNT(I+3)+BKOUNT(I+5))/4.+*(BKOUNT(I+4))/2.
10 CONTINUE
RETURN
END
SUBROUTINE SUB5(NRMTHF)
COMMON AKOUNT(500),BKOUNT(500)
COMMON CKOUNT(500),DKOUNT(500)
DO 5 I=1,NRMTBF
CKOUNT(I)=(AKOUNT(I+2)+AKOUNT(I+6))/10.
5 +(AKOUNT(I+3)+AKOUNT(I+5))/5.
5 +(AKOUNT(I+4))/2./5.
DKOUNT(I)=(BKOUNT(I+2)+BKOUNT(I+6))/10.
5 +(BKOUNT(I+3)+BKOUNT(I+5))/5.
5 +(BKOUNT(I+4))/2./5.
5 CONTINUE
RETURN
END
SUBROUTINE SUB7(NRMTHF)
COMMON AKOUNT(500),BKOUNT(500)
COMMON CKOUNT(500),DKOUNT(500)
DO 5 K=1,NRMTBF
CKOUNT(K)=(AKOUNT(K+1)+AKOUNT(K+7))/22.
5 +(AKOUNT(K+2)+AKOUNT(K+6))/11.
5 +(AKOUNT(K+3)+AKOUNT(K+5))/2./11.
5 +(AKOUNT(K+4))/4./11.
DKOUNT(K)=(BKOUNT(K+1)+BKOUNT(K+7))/22.
5 +(BKOUNT(K+2)+BKOUNT(K+6))/11.
5 +(BKOUNT(K+3)+BKOUNT(K+5))/2./11.
5 +(BKOUNT(K+4))/4./11.
5 CONTINUE
RETURN
END
SUBROUTINE SUH9(NRMTRF)
COMMON AKOUNT(500),BKOUNT(500)
COMMON CKOUNT(500),DKOUNT(500)
DO 5 I=1,NRMTRF
CKOUNT(I)=(AKOUNT(I)+AKOUNT(I+8))/46.
5 +(AKOUNT(I+1)+AKOUNT(I+7))/23.
5 +(AKOUNT(I+2)+AKOUNT(I+6))/2./23.
5 +(AKOUNT(I+3)+AKOUNT(I+5))/4./23.
5 +(AKOUNT(I+4))/8./23.
DKOUNT(I)=(BKOUNT(I)+BKOUNT(I+8))/46.
5 +(BKOUNT(I+1)+BKOUNT(I+7))/23.
5 +(BKOUNT(I+2)+BKOUNT(I+6))/2./23.
5 +(BKOUNT(I+3)+BKOUNT(I+5))/4./23. + BKOUNT(I+4)*8./23.
5 CONTINUE
RETURN
END
?
```

7	2000	5	8	45.00	745.00	10.00	100.00
0.00	0.00	.57	2.22	3.87	5.52	7.17	10.35

THIS PAGE IS BEST QUALITY PRACTICABLE
FROM COPY FURNISHED TO DDC

3.75	5.40	7.05	4.70	10.35	10.35	10.35	10.35
41.	49.50	34.					
19.	21.00	15.					
16.	20.60	12.					
8.	9.74	5.					
7.	10.35	4.					
3.	4.50	2.					
6.	6.80	3.					
3.	4.50	2.					

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
12	Commander Defense Documentation Center ATTN: TCA Cameron Station Alexandria, VA	1	Commander US Army Electronics Research and Development Command ATTN: DRDEL-SA Fort Monmouth, NJ 07703
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCBSI-L 5001 Eisenhower Avenue Alexandria, VA 22333	2	Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SA ATAA-T White Sands Missile Range, NM 88002
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCPA-S 5001 Eisenhower Avenue Alexandria, VA 22333	2	Chief Defense Logistics Studies Information Exchange US Army Logistics Management Center ATTN: DRXMC-D Fort Lee, VA 23801
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCQA 5001 Eisenhower Avenue Alexandria, VA 22333	1	Commander US Army Concepts Analysis Agency 8120 Woodmont Avenue Bethesda, MD 20014
1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDE-R 5001 Eisenhower Avenue Alexandria, VA 22333		<u>Aberdeen Proving Ground</u> Ch, Tech Lib, Bldg. 305 Dir, BRL, Bldg. 328 Dir, HEL, Bldg. 520