

AD-A066 275

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
INVESTIGATION OF EXCHANGE BETWEEN RECIRCULATION ZONE BEHIND STA--ETC(U)
MAY 78 T A BOVINA

F/G 21/2

UNCLASSIFIED

FTD-ID(RS)T-0621-78

NL

1 OF 1
ADA
066275



①

AD-A066275

FOREIGN TECHNOLOGY DIVISION



INVESTIGATION OF EXCHANGE BETWEEN RECIRCULATION ZONE
BEHIND STABILIZER AND EXTERNAL FLOW AND SOME
PROBLEMS OF FLAME STABILIZATION

By

T. A. Bovina



DDC
RECEIVED
MAR 23 1979
AC

Approved for public release;
unlimited.

78 12 26 50 7

EDITED TRANSLATION

FTD-ID(RS)T-0621-78

19 May 1978

MICROFICHE NR: *FTD-78-C-000694*

INVESTIGATION OF EXCHANGE BETWEEN RECIRCULATION
ZONE BEHIND STABILIZER AND EXTERNAL FLOW AND
SOME PROBLEMS OF FLAME STABILIZATION

By: T. A. Bovina

English pages: 30

Source: Goreniye Pri Ponizhennykh Davleniyakh
i Nekotoryye Voprosy Stabilizatsii
Plameni v Odnofaznykh i Dvukhfaznykh
Sistemakh, Izd-vo Akademii Nauk
SSSR, Moscow, 1960, ppgs: 58-70

Country of origin: USSR
Translated by: Marilyn Olachea
Requester: FTD/TQTA
Approved for public release;
distribution unlimited.

ACCESSION NO.	
RTIS	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. and/or SPECIAL
A	

<p>THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.</p>	<p>PREPARED BY: TRANSLATION DIVISION FOREIGN TECHNOLOGY DIVISION WP-AFB, OHIO.</p>
---	---

U. S. BOARD ON GEOGRAPHIC NAMES TRANSLITERATION SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	<i>А а</i>	A, a	Р р	<i>Р р</i>	R, r
Б б	<i>Б б</i>	B, b	С с	<i>С с</i>	S, s
В в	<i>В в</i>	V, v	Т т	<i>Т т</i>	T, t
Г г	<i>Г г</i>	G, g	У у	<i>У у</i>	U, u
Д д	<i>Д д</i>	D, d	Ф ф	<i>Ф ф</i>	F, f
Е е	<i>Е е</i>	Ye, ye; E, e*	Х х	<i>Х х</i>	Kh, kh
Ж ж	<i>Ж ж</i>	Zh, zh	Ц ц	<i>Ц ц</i>	Ts, ts
З э	<i>З э</i>	Z, z	Ч ч	<i>Ч ч</i>	Ch, ch
И и	<i>И и</i>	I, i	Ш ш	<i>Ш ш</i>	Sh, sh
Й й	<i>Й й</i>	Y, y	Щ щ	<i>Щ щ</i>	Shch, shch
К к	<i>К к</i>	K, k	Ъ ъ	<i>Ъ ъ</i>	"
Л л	<i>Л л</i>	L, l	Ы ы	<i>Ы ы</i>	Y, y
М м	<i>М м</i>	M, m	Ь ь	<i>Ь ь</i>	'
Н н	<i>Н н</i>	N, n	Э э	<i>Э э</i>	E, e
О о	<i>О о</i>	O, o	Ю ю	<i>Ю ю</i>	Yu, yu
П п	<i>П п</i>	P, p	Я я	<i>Я я</i>	Ya, ya

*ye initially, after vowels, and after ъ, ь; e elsewhere.
When written as ë in Russian, transliterate as yë or ë.

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English	Russian	English	Russian	English
sin	sin	sh	sinh	arc sh	sinh ⁻¹
cos	cos	ch	cosh	arc ch	cosh ⁻¹
tg	tan	th	tanh	arc th	tanh ⁻¹
ctg	cot	cth	coth	arc cth	coth ⁻¹
sec	sec	sch	sech	arc sch	sech ⁻¹
cosec	csc	csch	csch	arc csch	csch ⁻¹

Russian English

rot curl
lg log

INVESTIGATION OF EXCHANGE BETWEEN RECIRCULATION ZONE BEHIND
STABILIZER AND EXTERNAL FLOW AND SOME PROBLEMS OF FLAME STABILIZATION

T. A. Bovina

INTRODUCTION

We know that combustion stability when a flame is stabilized by means of poorly streamlined bodies is achieved by continuous ignition of the fuel mixture of combustion products from the recirculation zone formed behind the body. However, the specific mechanism of this ignition and the phenomena of flameout have not yet been thoroughly studied. Some researchers (see, for example [1], and [2]) believe that combustion stability behind the stabilizer is determined solely

by the thermal state of the zone of reverse currents. It is also believed that the relationship between the time that the mixture remains in the zone behind the stabilizer and its combustion time determines the stability of the combustion process. These theories do not, however, address the problem of the place of ignition of the fresh mixture behind the stabilizer and are not confirmed by experimental temperature measurements in the zone. Evidently it would be better to study the phenomenon of stabilization not from the standpoint of balance in the zone, but from the standpoint of the heat balance which is external with respect to the zone, since the amount of heat carried into the external flow determines the course of development in it of the chemical reaction which occurs under certain conditions prior to ignition.

Thus, from our standpoint, the stability of the process depends not only on the ignition source, but also on external conditions, i.e., on the amount of heat received by the fresh mixture and, in this connection, the manner in which the chemical processes develop in it.

Thus, it is best to begin our study of the stabilizer with the patterns of heat exchange between the recirculation zone and the external flow.

STUDY OF MASS EXCHANGE BEHIND THE STABILIZER

Based on the peculiarities of the flow behind a poorly streamlined body, we assume that the exchange between the zone and the flow occurs primarily as a result of turbulent diffusion.

We also assume that the relationship between the diffusion coefficient of the zone D_a and the diffusion coefficient of the oncoming flow D_n , flow velocity v_n , and the dimension of the stabilizer d_{CT} is achieved in the form of a simple dependence

$$(1) \quad \frac{D_a}{v_n} = k_1 \frac{D_n}{v_n} + k_2 d_{CT},$$

which satisfies the boundary conditions.

Here k_1 and k_2 are the coefficients of proportionality.

This dependence was later verified experimentally.

For the recirculation zone we found no method of directly determining the coefficient of turbulent exchange. However, it can be indirectly determined by the magnitude of the average time that the

gas remains in the zone behind the stabilizer.

The average time (average time of exchange) τ_n is determined as the ratio of the volume of the zone to the volume flow of gas through it.

In the case of diffusive exchange

$$(2) \tau_n = \frac{V_n r_{cp}}{S_n D_n}$$

where V_n , S_n , and r_{cp} — represent the volume, surface, and average radius of the zone, respectively.

If we know the average time and the dimensions of the zone, then from this formula we can calculate the average coefficient of diffusion*.

[FOOTNOTE: The value D_n was assumed to be average for the entire zone. The corresponding coefficient of proportionality in equality (2) was included in the value r_{cp} . END FOOTNOTE]

determination of the average time was a problem of independent and more general interest*.

[FOOTNOTE: Recently we became aware of study [3], in which the exchange behind a stabilizer is also studied and a method is proposed for determining the time that the cold currents remain, which does not differ basically from the method described here. Only one value for this time is given, namely, for a conical stabilizer 64 mm in diameter at a flow speed of 3.8 m/s. The shape of the stabilizer and its flow conditions do differ from ours. END FOOTNOTE]

The method of experimentally determining τ_n was as follows. A secondary mixture, easily carried along by the turbulent movements of the medium and whose presence could be established in some way, was introduced into the zone behind the stabilizer. After the stationary process between the entry and removal of the mixture was established, the supply of it was cut off abruptly and the time change in its concentration from equilibrium to zero observed. In this case the change in concentration should be subject to the following law:

$$(3) \quad C = C_0 e^{-\frac{t}{\tau_n}}$$

where C_0 is the concentration of the mixture at the initial moment in

time, i. e., at the moment that its supply to the zone ceases;

τ_{η} - the constant coefficient for the exponent - time during which the concentration of the mixture decreases e times. Numerically this quantity is equal to the average time that the gas remains in the recirculation zone during the stationary process. If we determine it from equation (3), then we get the value for the average time.

In practice the value τ_{η} was found as follows. In working with cold currents, tobacco smoke was introduced into the zone behind the stabilizer. Portions of this smoke were capable of reflecting the light incident on them. During combustion an aqueous solution of common salt was injected into the zone. In the hot zone the water evaporated, and the sodium vapor which was formed radiated the light*.

[FOOTNOTE: It was experimentally confirmed that the amount of injected water and its time of evaporation have no substantial effect on the thermal regime of the zone or the radiation of the sodium vapors. END FOOTNOTE]

The light reflected or radiated by the particles was captured by

a photomultiplier, and the developed current was amplified and transmitted to an oscillograph for notation. The work was conducted in the region proportional to the dependence of radiation on the concentration of particles. The dependence of the current strength (voltage) on time, according to our estimation, should be exponential when the glowing particles enter the zone - curve ab, and when they are carried out - curve bc (Fig. 1a). Yet, since we used an ac amplifier*, at the amplifier output, i.e., at the oscillograph input, the change in the strength of the current in time should be as follows:

$$(4) \quad I = \frac{U_0}{R} (e^{-\frac{t}{\tau_n}} - e^{-\frac{t}{\tau_c}}) \frac{1}{\left(\frac{\tau_n}{\tau_c} - 1\right)},$$

where U_0 is the voltage corresponding to current I_0 ; R - resistance of circuit and shunts; τ_c - time constant of circuit.

[FOOTNOTE: Selection of the ac amplifier is explained by a number of its advantages as compared to the dc amplifier, both with respect to the simplicity of the circuit and work stability and greater accuracy in determining τ_n with the aid of oscillograms. END FOOTNOTE]

The oscillograms took a form similar to the curves shown in Fig. 1b.

For convenience in determining τ_H from these curves we obtain the relationship between the time corresponding to the maximal point on curve τ_{max} (points b and e in Fig. 1b), the time constant of the circuit, and the time spent [in the zone]

$$(5) \quad \tau_{max} = \frac{\ln \tau_0 - \ln \tau_B}{\frac{1}{\tau_B} - \frac{1}{\tau_c}}$$

Dependence $\tau_B = f(\tau_{max})$ when $\tau_c = \text{const}$ plotted in the form of a curve, which was used in determining τ_H .

The calculated values of the change in the strength (voltage) of the current in time were compared with experimental values taken from the oscillograms (Fig. 2). There is an amazing coincidence between the experiment and the calculation, leading to the deduction that, as assumed, the change in the concentration of glowing particles in the zone does follow the law of (3) and that the obtained formula (5) is suitable for determining τ_H .

The accuracy of determining τ_{η} by the given method was $\pm 7-8\%$.

The work was conducted in a chamber of rectangular section of 90 x 180 mm. Stabilizers (V-shaped), from 20 to 60 mm in dimension with an apex angle of 30° , were installed at a distance of 250 mm from the edge of the chamber (see the scheme in Fig. 3). The speed of the flow varied from 10 to 70 m/s for cold injections and from 60 to 160 m/s during combustion.

The turbulence intensity of the flow varied from 5 to 20% . The excess air ratio α - from 0.8 to 1.45.

Homogeneous gas-air mixtures were used.

In each regime 10-15 photos were taken. After these were processed, the average of τ_{η} was found.

From general concepts of diffusion exchange we might expect the following dependences of τ_{η} on the dimension of the stabilizer and the speed in turbulence of the oncoming flow. With a change in the stabilizer dimension r_{CP} and ratio $\frac{v_1}{s_v}$ in equation (2) change in proportion to d_{ct} . Then, τ_{η} should be proportional to $\frac{d_{ct}}{D_s} - \frac{d_{ct}}{K_1 + K_2 d_{ct}}$.

where K_1' and K_2'' are constant.

Or, if K' can be ignored, then τ'' can change in proportion to d_{cT} .

We know that in technical tubes the value $\frac{D_0}{v_n}$ remains constant when the speed of the flow changes (self-similar theory). Then, as follows from (1), quantity $\frac{D_0}{v_n}$ should also remain constant

$$\frac{D_0}{v_n} = \frac{V_1' \tau''}{S_0 \cdot \tau_n \cdot v_n} = \text{const.}$$

Since we know that the dimensions of the zone remain virtually unchanged with velocity, then τ'' should change in reverse proportion to the velocity of the flow.

When a turbulizing grid is placed in the flow, the diffusion coefficient of the flow increases. With an increase in the distance from the grid the intensity of the turbulence falls, while scale l_0 increases. Yet, since in this case the decrease in intensity is more abrupt than the increase in scale, the value $\frac{D_0}{v_n} = d_0$ should decline as the distance from the grid increases. We might expect that $\frac{D_0}{v_n}$ will in this case decrease linearly, while τ'' will increase in the same ratio.

Presented in Fig. 4 for the case of a cold flow when $d_{cT} = 50$ mm

are the experimental dependences of τ_{Π} on the stabilizer dimension and the speed and turbulence intensity of the oncoming flow, along with the change in τ_{Π} along the zone.

As we see from these curves, the obtained results do agree with the theoretical premises. *For tubular (~5%) turbulence it can be considered that*

$$\tau_{\Pi} \approx 37 \frac{d_{CT}}{v_{\Pi}} \text{ s.}$$

From the experimental values of τ_{Π} at different $\frac{D_{\Pi}}{v_{\Pi}}$, and at constant $\frac{D_{\Pi}}{v_{\Pi}}$ and different stabilizer dimensions the values of the average diffusion coefficient (D_{Π}) in the recirculation zone were calculated.

The experimental data are approximated by equation (1) at values of constants $K_1 = 1$ and $K_2 = 0.004$ (see Fig. 5).

From equation (1) we see that when $d_{CT} \rightarrow 0$ $\frac{D_{\Pi}}{v_{\Pi}} \rightarrow \frac{D_{\Pi}}{v_{\Pi}}$.

The value of $\frac{D_{\Pi}}{v_{\Pi}}$ for the smallest stabilizer $d_{CT} = 20$ mm was equal to 0.13 mm, while the value of $\frac{D_{\Pi}}{v_{\Pi}}$, determined by the optical-diffusion method, was equal to 0.12 mm*.

[FOOTNOTE: Optical-diffusion method described in more detail in [4].

END FOOTNOTE]

Such close values seem to indicate the correctness of determining D_3 and τ_n . Evidence of this can also be found in the fact that the values of D_3 which are indirectly determined through τ_n were close to the values of the diffusion coefficient in the mixing zone, which were determined by means of the optical-diffusion method*.

[FOOTNOTE: The thin tube through which the smoke was admitted was placed on the edge of the stabilizer. With the aid of photography and subsequent processing (assuming that the values of the pulsations were the same in the direction of both axes), the value of the diffusion coefficient in the mixing zone was determined. END FOOTNOTE]

These values ($d_{CT} = 50 \text{ mm}$) are presented in Table 1.

The results of the experiments conducted during combustion are shown in Fig. 6. We learn that during combustion in a flow with tubular turbulence τ_n can be expressed by the dependence

$$\tau_n \approx 104 \frac{d_{CT}}{v}, \text{ s.}$$

The time that the turbulent flow remains [in the zone] during combustion is 3.7 times greater than in the case of the cold flow. This is apparently explained by a decrease in the total level of turbulence in the combustion zone, indirectly indicated by decrease in the gradient of average velocities behind the stabilizer. Just as in the case of cold flows, τ_{fl} decreases as the turbulence of the oncoming flow increases (Fig. 6b). In a range of change in α of from 0.8 to 1.45 (Fig. 6c) the time [that it remains in the zone] remains virtually constant, apparently explained by the very slight change in the diffusion coefficient in the given range of α .

INVESTIGATION OF STABILIZATION MECHANISM

As indicated, the change in the concentration of glowing particles in the zone occurs according to the law of (3), i.e., equation $\frac{dq}{dt} = -\frac{1}{\tau_s} q$ is correct for the speed of change in the concentration. It is obvious that by analogy to the processes of mass and heat exchange, the following equation will be correct for the speed of heat exchange

$$\frac{dq}{dt} = -\frac{1}{\tau_s} (\tau C_p T - \tau_0 C_p T_0)$$

where γ , C_p , T represent specific weight, heat capacity, and temperature of the gases in the zone, respectively; γ_0 , C_{p0} , T_0 — represent the values of the same parameters in the oncoming flow.

To determine the amount of heat which is removed from the zone to the external flow temperature, measurements were taken in the zone in steady regimes, regimes close to flameout, and at the moment of flameout. The measurements were taken by chemical analysis and with the aid of a thermocouple*.

[FOOTNOTE: All temperature measurements were taken in the region bounded by the surface of the zero horizontal velocities in the so called zone of "reverse currents." The boundaries of this zone, unlike the recirculation zone, are easily determined experimentally.
END FOOTNOTE]

The graphics (Fig. 7) show the dependence of the completeness of combustion ϕ , measured by chemical analysis, on the excess air ratio for different flow speeds and stabilizer dimensions.

The measurements show that combustion completeness in the zone is sufficiently high - $\phi_{CP} = 0.96-0.97$ - and that it does not change

as flameout approaches, either with respect to α or with respect to v_{η} , up to regimes which are rather close to flameout ($\alpha = 0.9 \alpha_{c\rho}$). This indicates that the temperature in the zone is close to the theoretical combustion temperature for the given α .

In Fig. 8 we see the temperature field over the section of the zone, measured by the thermocouple.

The upper half of the diagram corresponds to the regime of $\alpha = 1.56$; $v_{\eta} = 143$ m/s ($t_{c\rho} = 1360^{\circ}\text{C}$); the lower half corresponds to approximately the same regime of $\alpha = 1.58$, although to a velocity which is 1.5 times lower - $v_{\eta} = 90$ m/s ($t_{c\rho} = 1355^{\circ}\text{C}$). These measurements, as we see from the diagram, also indicated that a change in velocity did not lead to a change in the average temperature in the zone.

Temperature measurements at the moment of flameout were taken with the aid of a thermocouple, which was placed in the center of the zone. The readings from the thermocouple and the flameout indicator were recorded on film. Deciphering of the film revealed that the temperature in the center of the zone, in the case of a constant value of α and an increase in v_{η} , remains constant right up to flameout, i.e., the beginning of the avalanche-like temperature drop in the zone. The flame, according to the indicator, is completely

extinguished within 0.02-0.05 s.

Thus, the obtained results indicate that the zone of reverse currents is filled with products of complete combustion, and, consequently, flameout is not related to the insufficient time that gases remain in the zone of reverse current, as believed by certain researchers.

If we investigate the movement along the recirculation zone of an element of the hot mixture and its exchange with the zone and the external current, then we might assume that the determining factors in the stabilization process are the amount of heat arriving per unit volume of the fresh mixture and the time of movement of the mixture along the service of the zone. The obtained experimental data on the exchange and temperature in the zone, along with data on the change in width of the mixing region, i.e., the region of heat diffusion behind the stabilizer, made it possible to qualitatively examine the change in the amount of heat arriving per unit volume of the fresh mixture as the working mode of the stabilizer changed and, in connection with it, the movement of the point representing the beginning of combustion of the fresh mixture in relation to the surface of the zone. It was found that the distance from the edge of the stabilizer to the beginning of the flame l should be proportional to the speed of the flow and time required to prepare

the mixture for combustion, conditionally called induction time τ_{η}

(6) ~~1 - \tau_{\eta}~~

This time includes such components as the time required to heat the cold mixture in the separated volume by mixing τ_{CM} and the time required to develop the reactions. This last time depends on the kinetics i.e., the induction time as understood in the theory of combustion of homogeneous gas mixtures τ_{HK} .

We can assume that if the time of contact of the combustible mixture with the surface of the zone τ_K becomes greater than the preparation time of the mixture for combustion τ_H , then normal work of the stabilizer will be impossible.

Actually, if an element of the combustible mixture moving along the hot surface of the zone, has not managed to ignite, then, as it crosses the limit, it is even less likely to ignite, since its temperature begins to fall, while τ_H as a result of this progressively increases. Then the condition for the cessation of flame propagation into the fresh mixture can be represented by equation (6), while the value of l is equal to the length of the zone of reverse currents L_3 , which in our case equals $3.5 d_{CT}$

(7) $L_0 \sim v_{st}$

To check this hypothesis on the movement of the origin of the flame relative to the zone of reverse currents, measurements of the positions of the flame boundaries were taken for different working regimes of the stabilizer. The measurements were taken by an ionization sensor. It was found that the beginning point of combustion of the fresh mixture moves away from the edge of the stabilizer as the mixture is depleted and the velocity of the oncoming flow increases. In regimes which are close to flameout, combustion begins at a significant distance from the stabilizer, at the end of the reverse current zone. This can be illustrated by the following diagrams. In Figs. 9a, b, and c the distance along the tube radius lies on the Y-axis, the distance along the reverse current zone - along the X-axis. Points correspond to the beginning of the chemical conversions - the flame front boundary.

From these diagrams it is apparent that as the mixture becomes depleted, the origin of flame expansion moves away from the edge of the stabilizer. Measuring the distances to the point of the origin of expansion of the flame showed that l changes in proportion to the velocity of the flow and is exponentially dependent on the temperature which corresponds to the given α value of the mixture.

We can assume that as a result of the intensive exchange, the mixing time is small as compared to the kinetic time of induction.

Then, according to (6), since $\tau_{\text{mix}} \sim l^2/RT$,

$$l \sim v_{\text{sp}} \frac{E}{RT},$$

where E is activation energy, R - the gas constant, T - reaction temperature.

Hence it follows that the results of the experiments in coordinates $\ln \frac{l}{v_{\text{sp}}}$ and $\frac{1}{RT}$ should lie along a straight line with an angle of slope whose tangent equals E .

When the results of the experiment were processed, it was found that for all measured values of l , the point at these coordinates are grouped near a straight line (see Fig. 10). The points corresponding to flameout regimes lie along this straight line, if the values of $\ln \frac{l}{v_{\text{sp}}}$ lie along the Y-axis, where v_{sp} is the speed of flameout (see Fig. 11).

Thus, processing of the results of the experiment showed that apparently the factors which depend on kinetics have a greater significance in this process than mixing factors. Hence we might conclude that to expand stabilization limits we must select fuels

which with equal heat-producing capacities have lower values τ_{ext} . A preliminary decrease in this time for the fuel should also cause stability to improve.

CONCLUSION

Developed in the present study is a method for experimentally determining the time that the gas remains in the recirculation zone behind the stabilizer for cold currents and during combustion.

The method is based on the introduction into the zone of glowing particles and their photoelectric registration. The accuracy of determining this time is from ± 7 to $\pm 8\%$.

Quantitative data on this time and on the coefficient of diffusion for the recirculation zone were obtained.

The temperatures and completeness of combustion were measured in the zone behind the stabilizer. The measurements revealed that the zone of reverse currents is filled with the products of total combustion ($\phi = 0.96-0.97$). The completeness of combustion does not decrease as we approach flameout, either with respect to the velocity or the composition of the mixture (in the direction of depletion),

i.e., the temperature of the gases in the zone is close to the theoretical combustion temperature for the given α .

It was experimentally established that with depletion of the mixture and an increase in the velocity of the oncoming flow, the point representing the origin of combustion of the fresh mixture moves away from the edge of the stabilizer. This movement in the origin of the flame is proportional to the velocity of the flow and is exponentially dependent on the temperature which corresponds to the combustion temperature for the given α of the mixture.

Proposed here is a system for explaining the mechanism of flame stabilization behind a poorly streamlined body, according to which the determining factor in the stabilization process is the relationship between the time necessary for preparation for the mixture for combustion and the time of contact between the fuel mixture and the surface of the zone. Processing of experimental data shows that the factors which affect the kinetics of the process apparently play the predominant role in the total time of preparation of the mixture for combustion.

BIBLIOGRAPHY

1. В. Ф. Дунский. Исследование механизма стабилизации пламени в следе за плоскообтекающим телом. Дис., 1949.
2. Д. Ленгвелд, Э. Фрост, М. Вейсс. Стабилизация пламени в рециркуляционной зоне плоскообтекающего тела. «Вопросы ракетной техники», № 4, 1954.
3. A. W. Quick. Ein Verfahren zur Untersuchung des Austauschvorganges in verwirbelten Strömungen hinter Körpern mit abgewinkelter Strömung. Deutsche Versuchsanstalt für Luftfahrt. E. V. Bericht № 12, 19.
4. А. Г. Прудников. Измерения оптико-диффузионным методом турбулентности воздушных потоков и пламени. Дис. М., 1956.

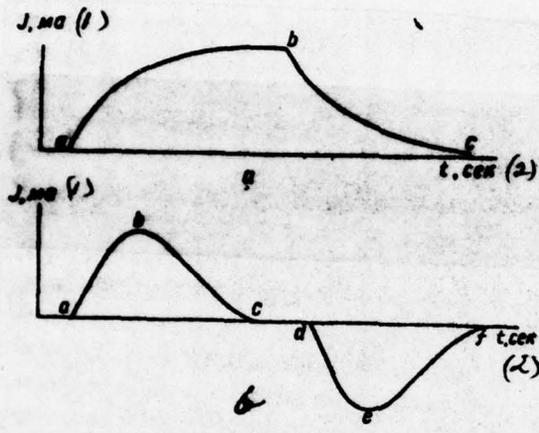


Fig. 1. System of change in current force in time. a - dc amplifier; b - ac amplifier. KEY: (1) mA, (2) t, s.

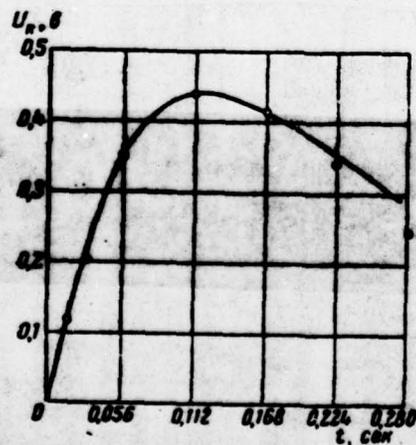


Fig. 2. See following page.

Fig. 2. Comparison of calculating curve $V = f(t)$ with experimental data. KEY: (1) V , (2), t , s .

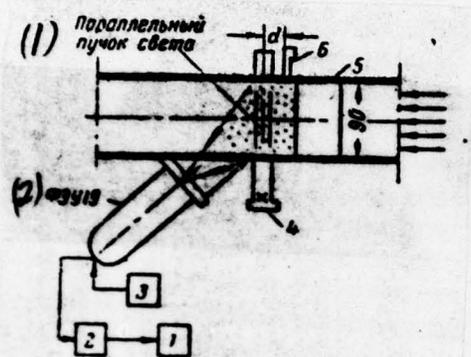


Fig. 3. Scheme of working chamber and block diagram of equipment. 1 - loop oscillograph, (2) amplifier of photoelectric multiplier (УФУ), (3) supply block of photoelectric multiplier, (4) light, (5) stabilizer, (6) valve. KEY: (1) Parallel light beam, (2) Photoelectric multiplier 19.

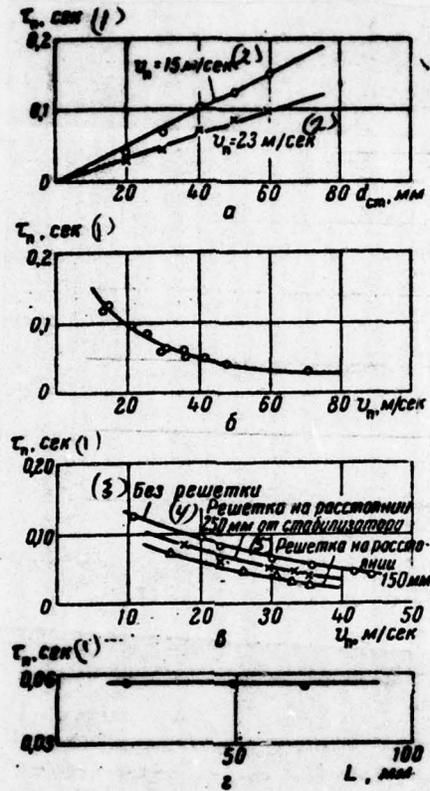


Fig. 4. Dependence of τ on stabilizer dimension (a), speed of flow v (b), intensity of turbulence (c), distance to stabilizer (d) (experiments with cold flows). KEY: (1) s, (2) м/s, (3) Without grid, (4) Grid at distance of 250 mm from stabilizer, (5) Grid at distance of 150 mm.

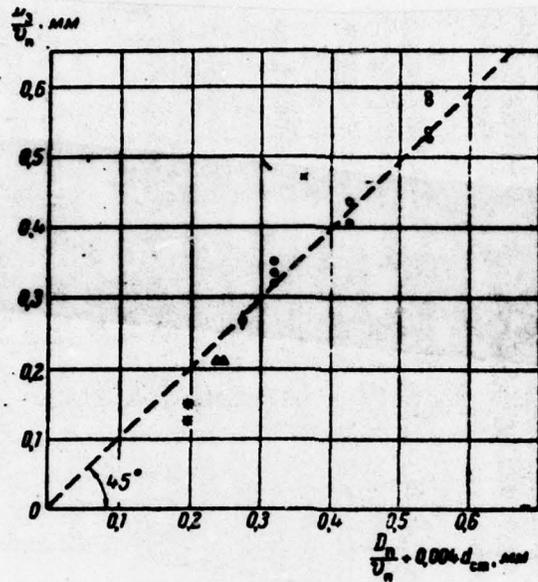


Fig. 5. Dependence of diffusion coefficient of zone on flow parameters (D_n, v_n) and stabilizer dimension (d_{CT})

x - $d_{CT} = 60$ mm; o - $d_{CT} = 50$ mm; ϕ - $d_{CT} = 40$ mm;
 Δ - $d_{CT} = 30$ mm; * - $d_{CT} = 20$ mm

Table 1.

$\frac{D_n}{v_n}, \text{mm}$	$v_n, \text{m/sec}^{(1)}$	$\frac{D_z}{v_n}, \text{mm}^{(2)}$	$\frac{D_z}{v_n}, \text{mm}^{(3)}$
0,12	44	0,35	0,2 + 0,28
	30	0,38	
0,25	22	0,341	0,35 + 0,4
	35,1	0,488	
	29,8	0,444	
0,32	18	0,442	0,55 + 0,6
	35,1	0,627	
	33	0,652	
	15,7	0,584	

⁽²⁾ По формуле (2).

⁽³⁾ По диффузионному методу.

Key on following page.

KEY: (1) m/s, (2) According to formula (2), (3) By diffusion method.

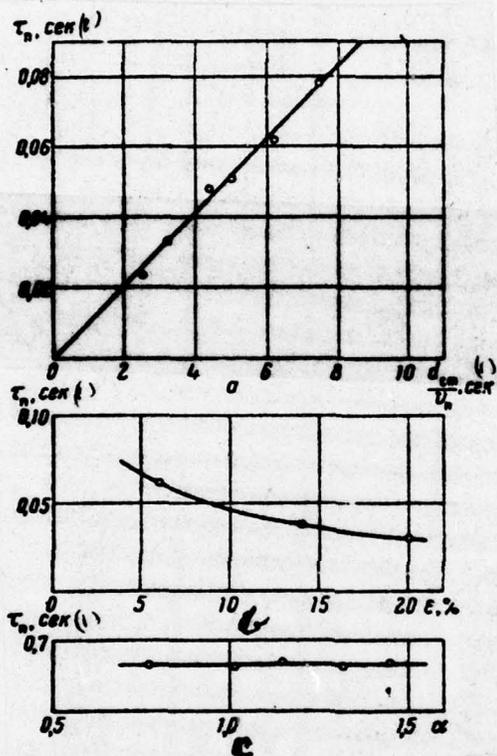


Fig. 6. Dependence of τ_{η} on ratio of stabilizer dimension to velocity of flow (a), intensity of turbulence (b), excess air ratio (c) (experiment during combustion). KEY: (1) s.

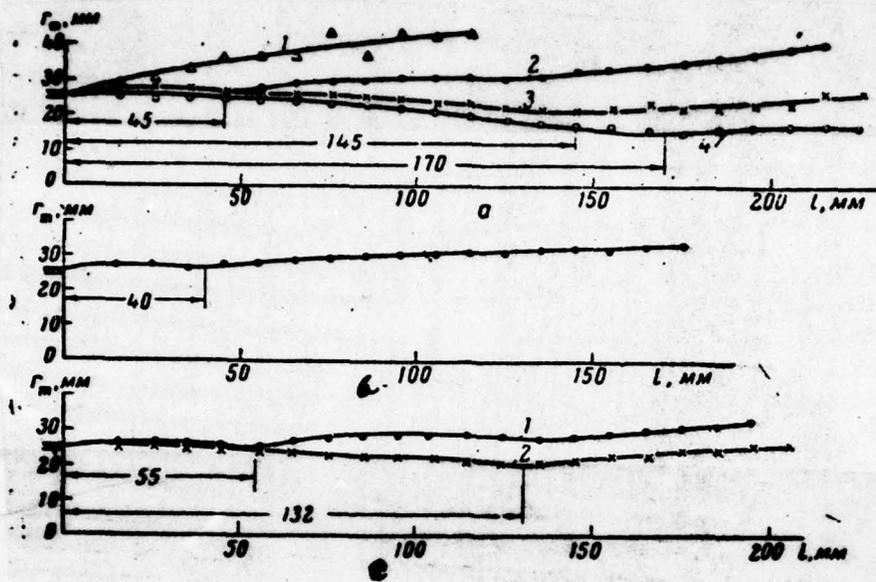


Fig. 9. Boundaries of flame front behind stabilizer, measured by ionization sensor a - for values: 1 - $\alpha = 0.9$, $v_{fl} = 82.54$, m/s; 2 - $\alpha = 1.427$, $v_{fl} = 80.2$ m/s; 3 - $\alpha = 1.68$, $v_{fl} = 81.3$ m/s; 4 - $\alpha = 1.72$, $v_{fl} = 78.8$ m/s; b - for values $\alpha = 1.375$, $v_{fl} = 80.3$ m/s; c) for value 1 - $\alpha = 1.52$, $v_{fl} = 61.5$ m/s; 2 - $\alpha = 1.58$, $v_{fl} = 161$ m/s.

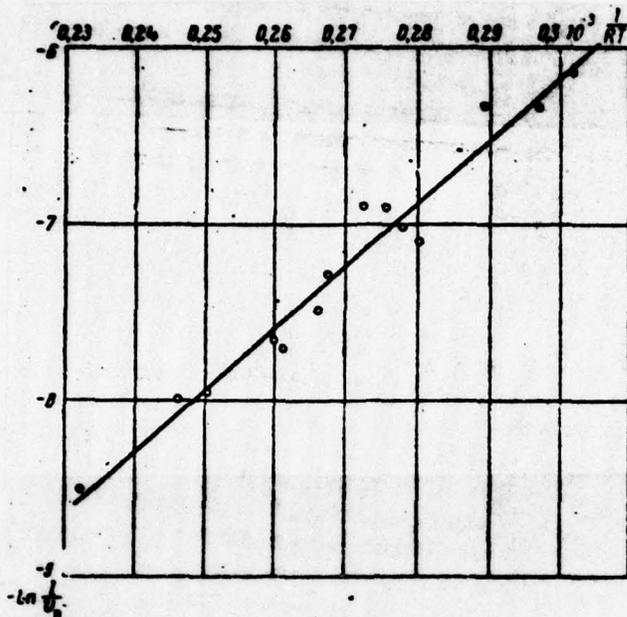


Fig. 10. Dependence of distance l from edge of stabilizer to place where flame expands in different operating modes of stabilizer. $E = 35.5$ Ccal/mole, $r = 1.02 \cdot 10^{-2}$ S, $\frac{l}{n} = 1.02 \cdot 10^{-2} \cdot \frac{35.5}{1.02} S$.



Fig. 11. Flareout characteristics of conical stabilizers $\circ - d_{CT} = 0.03$; $\Delta - 0.04$; $\circ - 0.051$; $\bullet - 0.025$; $\phi - 0.04$; $\Delta - 0.06$; $\square - 0.05$; $\square - d_{CT} = 0.07-0.08$ $\text{m. } \frac{l}{v_{\text{st}}} = \frac{1.4 \times 10^3}{RT} \text{ s.}$

end 0621

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIIA	1	E408 AFWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D LAB/FIO	1	E413 ESD	2
C513 PICATINNY ARSENAL	1	FTD	
C535 AVIATION SYS COMD	1	CCN	1
		ASD/FTD/NICD	3
C591 FSTC	5	NIA/PHS	1
C619 MIA REDSTONE	1	NICD	2
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
NASA/KSI	1		
AFIT/LD	1		