

AFFDL-TR-78-8

② LEVEL II

ADA070237

FACTOR OF SAFETY - USAF DESIGN PRACTICE

Geogre E. Muller and Clement J. Schmid  
Structural Integrity Branch  
Structural Mechanics Division

DDC  
RECEIVED  
JUN 22 1979  
B

April 1978

TECHNICAL REPORT AFFDL-TR-78-8

Final Report for January 1977 - September 1977

Approved for public release; distribution unlimited.

DDC FILE COPY


Best Available Copy

AIR FORCE FLIGHT DYNAMICS LABORATORY  
AIR FORCE WRIGHT AERONAUTICAL LABORATORIES  
AIR FORCE SYSTEMS COMMAND  
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433


NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This technical report has been reviewed and is approved for publication.



GEORGE E. MULLER  
Aerospace Engineer




CLEMENT J. SCHMID  
Technical Manager



JAMES J. OLSEN, Actg Chief  
Structural Integrity Branch  
Structures and Dynamics Division

FOR THE COMMANDER:



RALPH L. KUSTER, Jr., Col, USAF  
Chief, Structures and Dynamics Division

"If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify AEFDL/FBE, W-P AFB, OH 45433 to help us maintain a current mailing list".

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS  
BEFORE COMPLETING FORM

1. MEMORANDUM NUMBER: **14** AFDDI-1R-78-B

2. TITLE (and Subtitle): **6** FACTOR OF SAFETY - USAF DESIGN PRACTICE

3. GOVT ACCESSION NO.

4. REPORT NUMBER & PERIOD COVERED: **9** Final Report, January 1977 - September 1977

5. REPORT NUMBER

6. AUTHOR(s): George E. Muller, Clement J. Schmid **15** 107 F.

7. PERFORMING ORGANIZATION NAME AND ADDRESS: Structural Integrity Branch (FBI), Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio 45433

8. CONTROLLING OFFICE NAME AND ADDRESS: Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio 45433

9. MONITORING AGENCY NAME & ADDRESS (if different from controlling office)

10. PROGRAM ELEMENT PROJECT TASK AREA & WORK UNIT NUMBER: **16** Project 2401, Task 240101, Work Unit 24010104 **17** 04

11. REPORT DATE: **14** April 1978

12. NUMBER OF PAGES: 104

13. SECURITY CLASS. (of this report): UNCLASSIFIED

14. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report): Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the ABSTRACT) (enter in block 20, if different from Manual): **10** George E. Muller, Clement J. Schmid

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number):  
 Safety Factors                      Structural Design Concepts  
 Factors of Safety                    Structural Reliability  
 Airframe Safety Factors            Reliability Based Design Concepts  
 Factor of Safety History            Structural Design Criteria

20. ABSTRACT (Continue on reverse side if necessary and identify by block number):  
 A review of the historical development of the 1.5 structural factor of safety for airplanes, the 1.4 factor for manned space vehicles, and the 1.25 factor for missiles is presented from an Air Force perspective. Several variations and experimental applications of the factor of safety design concept and reliability based design concepts are also reviewed to show their interaction.

DDC  
 RECEIVED  
 JUN 22 1979  
 RELEASED  
 B

023, 070

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

↓  
Although not without criticism, the factor of safety design concept has become an almost universally accepted measure of flight safety. There is, however, a tendency among engineers to both challenge the continued application of factors of safety for efficient airframe design, and yet to avoid any changes that would challenge the confidence of future designs. The use of reliability based concepts will probably increase but their application to airframe design may be limited. The factor of safety still covers many contingencies and it appears at this time there will be a continuing need for some factor.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
FOR TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
Availability Codes	
Dist	Availability or Special
A	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

FOREWORD

The authors, Mr. George E. Muller, Aerospace Engineer, and Mr. Clement J. Schmid, Technical Manager, are located in the Criteria and Applications Group, Structural Integrity Branch, Structural Mechanics Division, of the Air Force Flight Dynamics Laboratory (FBE), Wright-Patterson AFB, Ohio 45433. The work was accomplished under Project Number 2401 "Flight Vehicle Structures and Dynamics Technology", Task Number 240101 "Structural Integrity for Military Aerospace Vehicles", Work Unit 24010104 "Structural Design Criteria Specifications and Design Methods." The effort was accomplished during the time period January 1977 through September 1977.

The basic text was originally presented at the 45th meeting of the Structures and Materials Panel of the Advisory Group for Aeronautical Research and Development (AGARD) in Voss, Norway on September 26, 1977. The text in this report remains essentially unchanged. Some figures have been added and minor clarifications incorporated. Corrections of a historical nature were made to the discussion of the V-G diagrams near the end of Section II.

Acknowledgement is made of the assistance provided by Mr. Robert L. Cavanagh, Dayton, Ohio and the Air Force Museum, Dayton, Ohio in providing the photographs:

Figure 3.	R. L. Cavanagh Collection
Figure 4.	A. F. Museum Collection
Figure 5.	A. F. Museum Collection
Figure 6.	A. F. Museum Collection
Figure 8.	R. L. Cavanagh Collection

Acknowledgement is made also for the valuable assistance lent the authors by Dr. John W. Lincoln and Messrs. John C. Grogan, Donald B. Paul, and John C. Sparks for their critical review of the report.

TABLE OF CONTENTS

SECTION		PAGE
I	INTRODUCTION	1
II	DEVELOPMENT OF THE 1.5 FACTOR OF SAFETY	4
III	DEVELOPMENT OF OTHER FACTORS OF SAFETY	26
IV	FACTOR OF SAFETY DESIGN CONCEPTS	31
V	RELIABILITY BASED DESIGN CONCEPTS	53
VI	CONCEPT INTERACTIONS	79
VII	CONCLUSIONS	89
	REFERENCES	92

PRECEDING PAGE BLANK

## SUMMARY

The 1.5 factor of safety is a highly visible airframe design parameter. The factor is empirically derived and provides an almost universally accepted measure of flight safety. Although the measure is qualitative, the level of safety provided by the 1.5 factor has become an accepted standard. These facts have developed a tendency among engineers to both challenge the continued application of the 1.5 factor of safety for efficient airframe design and yet avoid any change that would challenge the confidence of future designs. The unsettled position on the factor of safety may never completely stabilize but it can be clarified by reviewing its historical significance.

In U.S. design practice the significance of the 1.5 factor of safety can be placed in perspective by reviewing its development for both military and civil use. The factor evolved as a compromise opinion based on flight operations. The approximate 1.5 ratio of ultimate stress to yield stress for certain materials coming into use during the same time period supported the decision but did not influence the selection of the 1.5 factor of safety. Since the time of its selection, variations and adaptations to other aircraft types have been proposed and sometimes used. Several variations and experimental applications are reviewed.

The factor of safety design concept has recently lost some of its appeal and reliability based concepts have been emphasized. As part of its structural design criteria development program, the Air Force has sponsored investigations to develop reliability based criteria. Three of these investigations and similarities between the factor of safety and reliability concepts are reviewed. Although the use of reliability based concepts will probably increase, their application to airframe design may be limited. The factor of safety still covers many contingencies and it appears at this time there will be a continuing need for some factor.

## LIST OF FIGURES

FIGURE		PAGE
1	Design Loads for Major Assemblies	6
2	Army, Navy, Commerce (ANC) Committee Programs and Publications	8
3	Curtiss JW-4B Airplane	10
4	Fokker PW-7 Airplane	11
5	Curtiss I6C-4 Airplane	12
6	Boeing PW-9 Airplane	13
7	Navy V-G Diagram, Log-Log Coordinates and Rounded Corners	17
8	Boeing P-12C Airplane	19
9	Specification X-1803 Classifications	22
10	Structural Weight and Margin of Safety Variations with Changes in Factors of Safety	40
11	Example of Interaction Envelope Construction	44
12	Structural Limitations Large Cruise Vehicle	45
13	A Comparison of Weight & Performance Changes with Different Factor of Safety and Reliability Concepts for a Large Cruise Vehicle	47
14	Statistical Representation of the Factor of Safety Design Concept	57
15	Two Parameter Probability Distributions and Interaction Envelope	61
16	Location of Design Points	63
17	Overload & Understrength Requirements	68
18	Limit Design vs. Test Factor of Safety for a Given Structural Reliability Goal Versus Strength Scatter	70
19	Ultimate Design and Test Factor of Safety for a Given Structural Reliability Goal Versus Strength Scatter	71
20	Proposed List of Multichannel Recorder Parameters for the C-141 Airplane	75



SECTION I

INTRODUCTION

From the beginning of flight and even before power was used the concept of safety was considered. Wilbur Wright, in a letter to his father, Bishop Milton Wright, on September 23, 1900, wrote the following:

"I am constructing my machine to sustain about five times my weight and am testing every piece. I think there is no possible chance of its breaking while in the air."

Early designers, researchers, and pilots were interested in safety and were anxious to establish facts and information identifying maximum loads on various parts of the airplane. Wind tunnel measurements made before and after 1900 were used principally to predict airplane performance rather than structural strength, but in-flight loads measurements to assess strength were also made during those early days. To this day, occupant safety is a primary concern in designing manned vehicles and the "factor of safety" has become a prominent design concept.

The historical development of the 1.5 factor of safety in U.S. practice is largely unknown, even among the engineers who use the factor frequently. Although not without criticism, little if any thought or concern is given to using the 1.5 factor in day to day design applications. This fact would seem to reflect its basic acceptance. This is not true, however, with other structural design requirements which are frequently challenged and modified. Design specifications and practices are continuously reviewed and revised.

A concerted effort to rationalize airplane design requirements took place during the 1930's as a joint effort between the Army, Navy, and Civil Aeronautics Administration. The development of the 1.5 factor of safety is closely related to, and interacts with, this rationalization effort. The term rational in this case refers to a derived rather than an arbitrary requirement.

ADP-IR-78-8

The improvements that evolved were the result of a better understanding of actual airplane operations as they occurred during the 1920's and of the various parameters which influenced design loads and load factors. For example, Reference 1 states that during the mid-1920's a particular formula for computing the load factor capability of an airplane was not used by U.S. designers, since flight tests had shown this formula to be unreliable. The state of knowledge at that time provided more information about the actual maximum loads that could be expected in flight than were known about the parameters used in the formula, therefore limiting its effectiveness. However, as a result of continuing flight and ground tests, and engineering studies, overall knowledge grew quickly and the rationalization of earlier requirements could be seriously considered.

Although structural design requirements tend to change frequently, the 1.5 factor of safety, as adopted and applied to design loads, has not changed. When design or operational problems arise or structural failures occur, certain corrective changes are usually made to the design specifications, load prediction techniques, manufacturing techniques, environmental standards, or operational restrictions of the airplane. No known official action has ever been taken to increase the 1.5 factor of safety. The only known attempt to change it would have reduced the factor, which has always been treated in a relatively independent manner with respect to other design and operational criteria.

Specific references relating to the origin of the 1.5 factor of safety are almost nonexistent. Like any design requirements, the utilization of the 1.5 factor of safety evolved over a period of time and it is not an independent development. The interaction of engineering and operational experiences are documented under miscellaneous titles that do not allude to their historical relationship with the 1.5 factor of safety.

There was a reasonable, although not exhaustive, search of the open literature for information relating to the history of the 1.5 factor of safety but there were no directly related references found. Fortunately, several related articles were already known and were readily available.

Those few associated references that were found are related to the "new" interest in rationalizing structural safety on a reliability basis. This interest began in the late 1950's and early 1960's. It is concerned almost entirely with replacing the current 1.5 factor of safety with probabilistic interpretations of structural safety. Certainly, today's technology can better handle the mathematical and computational aspects of a more complex safety evaluation and may have prompted the current interest.

Variations to the conventional factor of safety and probabilistic techniques that have been considered and used by the USAF, as they relate to static structural strength, will also be reviewed to show how they evolved and are related to the 1.5 factor of safety.

The history of the 1.5 factor of safety has already been documented by two of the people actually involved with the formulation of design requirements during the 1920's and 1930's. Mr. A. Epstein worked for the United States Army Air Corps Materiel Center from 1929 to 1940 and prepared the original Air Corps Structures Specification X-1803 in 1936. He continued his career in the U.S. aircraft industry working in the structural loads and criteria area until his retirement. Mr. F. R. Shanley worked for the Civil Aeronautics Administration in the 1930's and was knowledgeable of the development of civil airworthiness requirements. Another source of civil airworthiness requirements, as they relate to the factor of safety, is a history prepared by the Los Angeles Regional Office of the Civil Aeronautics Administration. These histories are given as References 2 (Military) and 3 (Civil). The history of the 1.5 factor of safety given in this paper is derived almost entirely from these references, which are the only specific sources known to the authors.

## SECTION II

## DEVELOPMENT OF THE 1.5 FACTOR OF SAFETY

The 1.5 factor of safety in U.S. design practice is fundamental and represents a level of design safety which has become an accepted standard. However, engineers now challenge the continued application of the 1.5 factor for efficient airplane design, and yet tend to avoid any major change in design philosophy that would challenge the confidence of future designers or encourage legal entanglements. The factor currently provides a balance between design efficiency and safety. Its significance can perhaps be placed in perspective by reviewing both its military and civil development. Such a review can be helpful in judging the 1.5 factor's current and future applicability.

The evolution of structural design criteria from the semi-empirical and arbitrary regulations in effect during the 1910's to the relatively rational criteria established by 1940 is found in References 1 and 2. These references are indispensable and will be used extensively to relate the history of the 1.5 factor of safety in this section.

In the early 1910's, the U.S. Army Air Service maintained as a contractual document for design, the Handbook of Instructions for Airplane Design (HAIW).<sup>3</sup> Mr. Alfred C. Miles, in his book "Airplane Design" published by the Engineering Division of the U.S. Army Air Service in 1920 (Reference 1), detailed the structural criteria found in the 1915 edition of the handbook. The handbook criteria, although adopted independently, was the result of a four year effort to obtain identical design rules by the Army Air Service. In most cases, agreement was reached.

Civil airplane design practice paralleled the development of military practice. Civil air regulation began in 1916 and requirements were published in Aeronautics Bulletin No. 1. A. Strewhorn's Requirements of Air Commerce Regulations. The bulletin was kept up to date by

Name	LOAD FACTOR FOR				LOAD (Lb/Sq. Ft.)	
	High Incidence	Low Incidence	Inverted Flight	Landing Conditions	Ailerons and Horizontal Tail Surfaces	Vertical Tail Surfaces
Pursuit	12.0	6.5	4.0	7	35	30
Observation	8.5	5.5	3.5	6	30	25
Light Bomber	5.5	3.5	2.5	5	25	20
Heavy Bomber	4.5	3.0	2.5	5	20	15
Primary Training	8.0	5.5	3.5	7	35	30
Advance Training	6.0	5.5	3.5	7	35	30
Cargo	5.5	3.5	2.5	5	25	20

Figure 1. Design Loads for Major Assemblies (Reference 1)

periodic revisions and was replaced in 1938 by Part 04 of the Civil Air Regulations, in keeping with adoption of the Civil Aeronautics Act of 1938 (Reference 3a).

The Army and Navy specified design load factors for three flight attitudes, as shown in Figure 1. Two of these, low and high incidence (angle of attack) attitudes, were associated with dive recovery initiation, and final recovery from a pull-up to maximum load factor. The low incidence dive attitude with its aft center of pressure usually designed the rear wing spar. The associated design load factor, which was two-thirds of the high incident value, was based on a lift coefficient of one-fourth the maximum lift coefficient. This was a realistic design concept at the time, considering the relatively limited speed range of the airplanes and the reduced lift coefficient at the low incidence design point. The range of speed from stall to maximum was sufficiently restricted that when a high load factor maneuver was performed the airplane would generally come close to the maximum lift coefficient. To achieve the same maximum load factor at low incidence, where the lift coefficient was one-fourth the maximum, twice the speed would be required. Such a speed could not be achieved and thus, the reduced factor was realistic. The third flight attitude for which design load factors were specified was that of inverted flight.

Civil airplane design load factors were originally based upon actual acceleration measurements during Air Corps tests in the early 1920's. To avoid establishing categories or weight classifications for various airplane types, the load factors were made dependent on airplane gross weight and power loading. Until 1932 load factors were given in chart form using these two variables. These load factors were modified slightly in 1932 for airplanes having low power loadings. The requirements in Civil Aeronautics Bulletin 7-A were revised in 1934 to include certain basic performance and design characteristics by using empirical equations based on previous operational practice. Although the load factor charts were known to neglect important airplane characteristics, such as wing loading and drag, no substantial changes were made in the maneuvering load factors themselves. The load factor charts were replaced

- ANC - 1 (1) SPANWISE AIR LOAD DISTRIBUTION - NAVY
- ANC - 1 (2) CHORDWISE AIR LOAD DISTRIBUTION - NAVY
- ANC - 1 (3) DETERMINATION OF POINTS OF APPLICATION OF RESULTANT AIR LOADS - NAVY
- ANC - 1 (4) RELATION BETWEEN AERODYNAMIC AND INERTIA LOADS - NAVY
- ANC - 2 GROUND LOADS - ARMY
- ANC - 3 WATER LOADS - NAVY AND BUREAU OF AIR COMMERCE
- ANC - 4 METHODS OF STRUCTURAL ANALYSIS - BUREAU OF AIR COMMERCE
- ANC - 5 STRENGTH OF AIRCRAFT ELEMENTS -
- ANC - 6 METHODS OF STRUCTURAL TESTING - ARMY
- ANC - 7 DETAIL DESIGN - ARMY
- ANC - 8 PROPELLERS AND ENGINE ACCESSORIES - ARMY
- ANC - 10 PERFORMANCE CALCULATIONS - NAVY
- ANC - 11 PERFORMANCE TESTING - ARMY
- ANC - 12 VIBRATION AND FLUTTER PREVENTION HANDBOOK (DECIDED UPON IN 1938 EXECUTIVE MEETING) - CIVIL AERONAUTICS AUTHORITY

Figure 2. Army, Navy, Commerce (ANC) Committee Programs and Publications (Reference 2c)

in 1934 by an empirical equation and the minimum design load factor was reduced from 4.0 to 3.75 because of satisfactory experience with large flying boats (Reference 3a).

The term "factor of safety" was recognized in a general sense but various interpretations were applied. During the 1920's and early 1930's, all loads were ultimate and airplanes were designed to load factors which varied for each type. Reference 1 defines factor of safety as the ratio between ultimate load and maximum probable load. It states that the least factor of safety used for airplanes is usually 2.0 and that the term "factor of safety" is often used incorrectly in place of the term "load factor." A nearly identical definition for factor of safety was in use in Bulletin 7-A in 1929, and its use may have been the result of Mr. Niles' influence (Reference 1). In a minor sense, terminology was a problem and Reference 1 also gave definitions for design load, normal load, ultimate load, load factor, and margin of safety. Similar terms were also defined in the 1934 edition of Bulletin 7-A.

While writing Air Corps Specification X-1803 in 1936, Mr. Epstein noted the ambiguousness of the terms "applied" and "design" and proposed "limit" and "ultimate." The new terms were later adopted in a joint meeting of Army, Navy, and Commerce Department representatives, the forerunner of the group that later originated the Army, Navy, Commerce (ANC) programs, which are shown in Figure 2. The accepted terms first appeared in the 1940 changes to Specification X-1803.

The first edition of the Civil Air Regulations, issued in 1936, included a similar terminology change. The terms "design" and "applied" were replaced by "ultimate" and "yield." Both of the new terms referred to loads required to be withstood by the structure. The term "limit" was also introduced to specify the "actual" or "expected" load factor. The limit load factor represented a flight limitation for which the airplane was expected to be completely airworthy (Reference 3b).

As defined in Reference 1, Mr. Niles seems to have ignored the maximum maneuver load factor capabilities of the airplane in his assessment of the factor of safety of 2.0. He apparently used only the more



ALICE IR '88

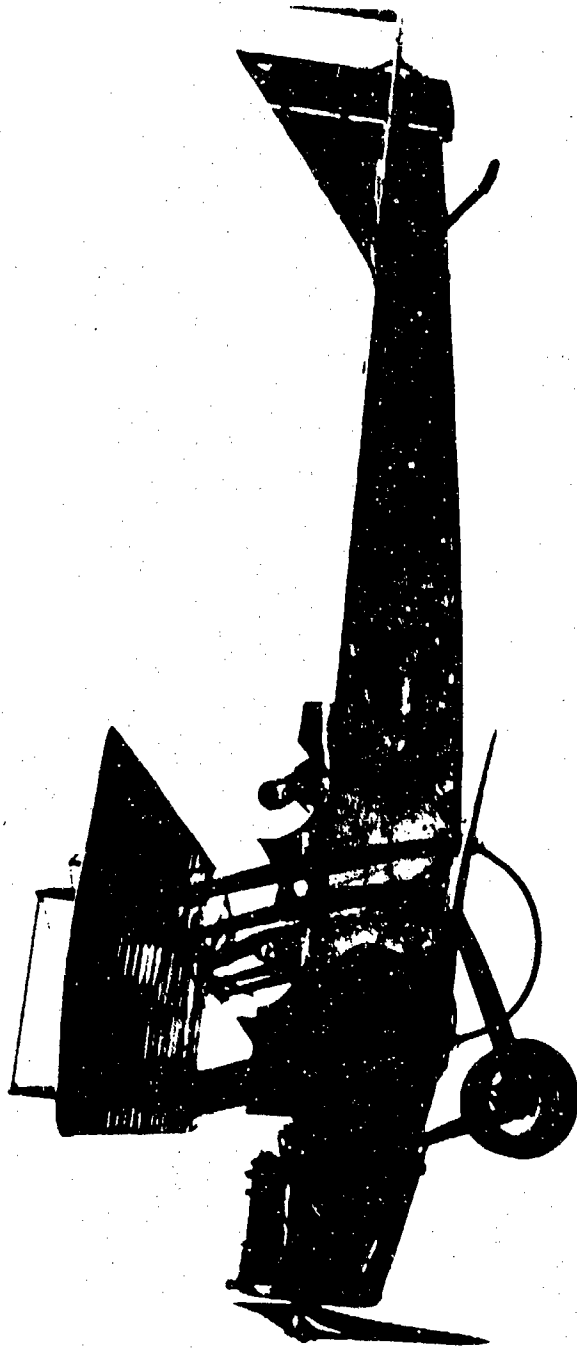


Figure 3. Curtiss JN-4 Airplane

typically achieved maneuver load factors when assessing the difference between actual and design loads. There were no flight restrictions to limit maneuvers, for example, to half the ultimate design load factor (to insure a factor of safety of 2.0) and it was characteristic at the time to use the more typical (or average) maneuver load factors as a basis for design regulations. The Civil Aeronautics Administration during the same period specified only a load factor value (ultimate) in the order of 6.0 for a typical airplane. The implication was that the airplane structure should not fail before reaching 6.0G in flight. There were no maneuver load limitations specified but there was the assumed factor of safety of 2.0.

During the 1920's, operational flight load factors began to increase. In 1921, Reference 4 stated that a load factor of 4.5 was sufficient for stunting based on flight tests using a JN-4H airplane (Figure 3). The Air Corps, in flight tests conducted in 1924, recorded a load factor of 7.8 in a PW-7 airplane (Figure 4) flown by James Doolittle. This factor was the highest reached and occurred during a sharp pull-up at 162.5 mph (Reference 5). The 7.8G compared to the theoretical maximum of 8.15G at  $C_L$  max and a design factor of 8.5G. The 7.8 load factor certainly could not be considered in the "maximum probable load" category when considering the factor of safety definition in Reference 1, but rather as an improbably high load. Similarly, the thought that airplanes had an approximate factor of safety of 2.0 was more of an opinion which was based on limited operational data and not on aerodynamic capability. Pursuit airplane design load factors were increased to 12 when it was realized that the 8.5 design load factor then in effect could be readily exceeded.

In 1927 (Reference 6), a Navy F6C-4 airplane (Figure 5) developed a load factor of 10.5G during a pull up and in 1930 (Reference 7) a PW-9 pursuit airplane (Figure 6) reached accelerations up to 9G during flight load test programs. Both of these airplanes were designed to ultimate load factors of 12G. However, there were no further increases in pursuit airplane design load factors as a result of these experiences.

APRIL 1947

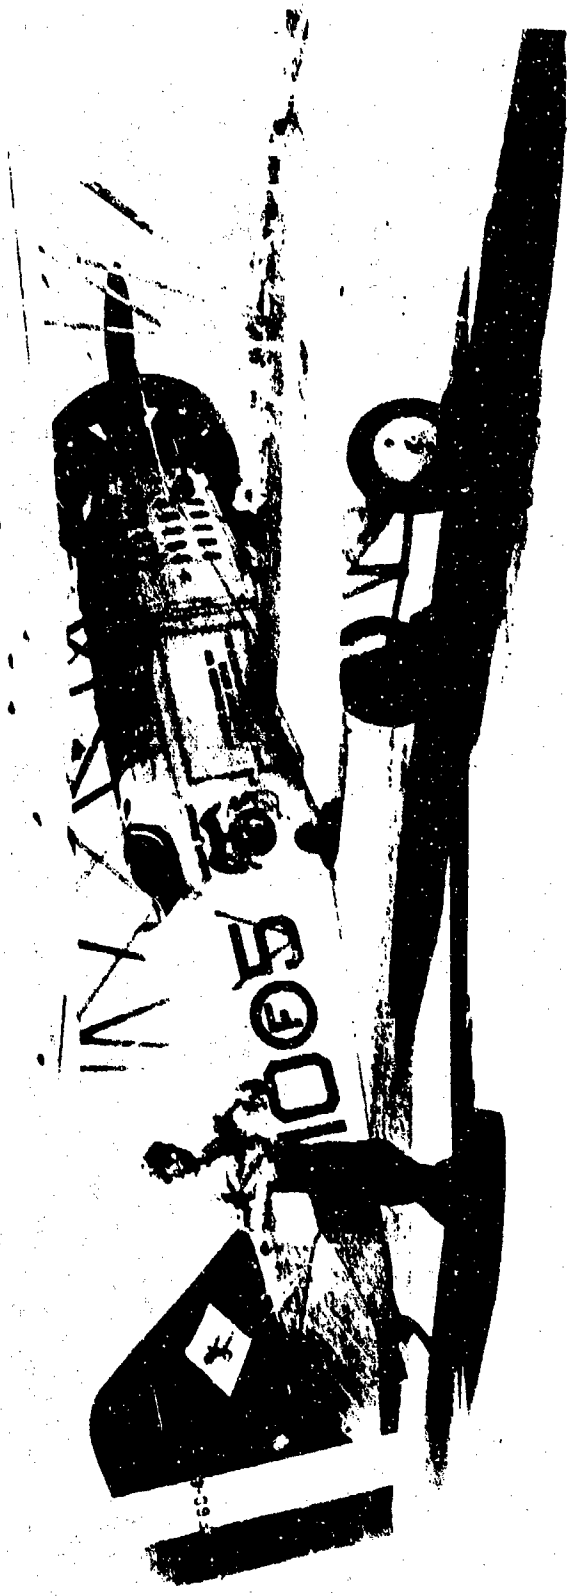


Figure 5. Curtiss P-40 Warhawk

AFFDL-TR-78-8



Figure 4. Fokker PW-7 Airplane

The Army, Navy and CAA began during the early 1930's to rationalize their design requirements. The objective was to relate the air loads more closely to actual flight conditions. This effort eventually resulted in the introduction of gust loading conditions, airplane speed, the velocity-acceleration (V-G) diagram, and the use of aerodynamic derivatives. A number of the more significant milestones in the evolution toward rational criteria are described in Reference 2c. The 1.5 factor of safety evolved from this rationalization process as an outgrowth of the flight test programs conducted.

The formal introduction of a factor of safety of 1.5 into Air Corps requirements occurred in 1930 but it only applied to establishing design tail loads. The HIAD (handbook) design loads for the horizontal tails at that time were admittedly arbitrary and insufficient for the expected service of many airplanes. Reference 8 established a new method which consisted of determining the steady-state flight path and speed of the airplane with zero power, assuming a complete range of angles of attack from maximum positive to maximum negative. The balancing tail load was then computed for each of these points. The balancing tail loads so defined were further adjusted by a velocity factor and increased 50 percent for design. The 50 percent factor over the computed load was termed the factor of safety for material. The adoption of this design technique also introduced the use of airplane speed and aerodynamic derivatives (wing moment coefficients) as requirements.

The flight loads program reported in Reference 7 was the most comprehensive undertaken up to that time (1930). It was conducted at the request of the Air Corps to determine the magnitude and distribution of loads over the wing and tail surfaces of a PW-9 pursuit airplane during maneuvers most likely to impose critical loads. The maneuvers included pull-ups, rolls, dives, and inverted flight. Pressure distributions and load time histories were recorded. The distributed loads measured over the tail surfaces were two-thirds of the design loads and assuming that the factor of safety of 2.0 applied, the report concluded that the design load criteria should be increased. The same data in Reference 7 were again evaluated in Reference 9. In Reference 9, the

APPENDIX



Figure 6. Boeing PW-9 Airplane

Mr. Shanley expressed similar thoughts in Reference 3a. He favored using a 1.5 factor of safety to keep the permissible limit loads relatively high, as compared to a factor of 2.0. Although a requirement relating limit loads to the absence of permanent set had not yet been written, Mr. Shanley interpreted limit load at that time as not exceeding yield strength.

As summarized by Mr. Epstein in Reference 2c, the factor of safety value that one considered to apply was a variable which depended upon the sample of flight data used and personal judgement as to the base to use in assessing the factor. In terms of actual strength, there was no way of knowing a true factor of safety in view of the limited knowledge of loads and stress analysis.

At this point in time, a factor of safety philosophy had essentially evolved but had not been formalized. Airplanes were flying at two-thirds of ultimate load factor, permanent set was not desirable, permissible limit loads should be as high as possible, and a 1.5 factor was already in use to establish design tail loads. Yet, there was no formally established relationship between design load factor, maximum aerodynamic maneuver capability, and operational maneuver limits. These relationships would evolve with the development of the V-G diagram.

The concept of a V-G diagram that defines the design boundaries of an airplane is generally attributed to Richard Rhoad. Prior to the adoption of this concept, the factor of safety had limited significance. The diagram itself appears obvious and elementary but it represents a major milestone leading to rational criteria. The Navy Bureau of Aeronautics was the first to specify this diagram, shown in Figure 7, as a requirement in 1933.

In the interest of establishing standardized design requirements with the Navy, the Air Corps had initiated a study of the Navy series of criteria specifications (Reference 10) in May 1933. The result of this study is found in Reference 11. Much of the diagram's development effort evolved around the definition of the upper left and right hand corners of the envelope. The Navy had specified rounded corners. An existing

authors assumed that the maximum operational loads were the specified ultimate design loads divided by a 1.5 factor of safety. The measured tail loads actually were about two-thirds of the design values and helped to substantiate the 1.5 assumption, although it was a weak assumption in a statistical sense. It was their belief that the requirements were based on "an anticipated load factor plus a margin of 50 percent to allow for possible imperfections of material, approximations of analysis and general lack of knowledge of loads." In References 7 and 9, then, we see two conclusions based on the same data. Each conclusion occurred by assuming a different factor of safety.

Although some disagreement and possible confusion seemed to exist, it could have been worse. Presumably, if the 2.0 factor had been considered the norm, the 126 PW-9 airplane should not even have been permitted to exceed 6G. If the highest 9G load factor recorded by the PW-9 airplane had been considered and compared to the 126 design load factor, an even lower 1.33 factor of safety could have been assumed when evaluating the flight data in Reference 7. Now consider again the factor of safety of 2.0. If it was still the accepted norm as assumed in Reference 7, then the "new" conclusion in Reference 9, that a 1.5 factor of safety prevailed during flight operations, was not adequately supported. The assumed need for a factor of safety of 2.0 in 1925 was just as valid as assuming the 1.5 factor existed in flight operations in 1931. Neither value could be substantiated statistically. Clearly, a change in thinking had occurred as a result of operational practice and available flight test data.

Mr. Epstein notes in Reference 7 that his thinking followed this pattern. In the early 1920's a factor of 2.0 was considered necessary as implied in Reference 1 by Miles. In the late 1920's, actual operational flying of the newer airplanes were coming closer to the ultimate load factor than earlier models. Airplanes were flying up to two-thirds and more of the ultimate load factor and nothing was happening to the structure; therefore, the evolution of thinking toward a lower factor of safety was a natural one.



Air Corps requirement called for the maximum load factor to occur at maximum lift coefficient and it was therefore recommended that the maximum acceleration and maximum lift coefficient line form the upper left hand corner. This point was adopted. For consistency, the lower left corner was made the intersection of the negative maximum lift coefficient line and the negative design load factor. The Air Corps also recommended that the upper right hand corner be a right angle to provide a definitive low angle of attack design point.

To counter the argument that airplanes performed satisfactorily in service with reduced load factors for this low incidence (angle of attack) corner, Mr. Epstein noted that stress analysis was inherently conservative and the structure was actually stronger than analysis indicated. Further evidence to justify a right angled upper right hand corner was provided by data in Reference 12 where a P-10C (Figure 8) airplane was shown to have initiated a pull up from a vertical dive, starting at 250 miles per hour. A maximum speed of 255 miles per hour was reached and a maximum load factor of 8.5 was developed (at low angle of attack) at 248 miles per hour, which was only a slight reduction from the maximum speed.

Maximum speeds were already defined for design purposes as either the terminal velocity in a vertical dive, which was applicable for pursuit airplanes, or as a restricted speed given in a percentage of high speed. These speed definitions were also used to form the maximum speed line for the V-G diagram. The upper and lower right hand corners were finally adopted as right angle intersections of the maximum speed line and the positive and negative acceleration lines. With the adoption of the V-G diagram, the tail load requirements of Reference 6 became obsolete because airplanes were then required to be balanced for all points of the diagram.

The maximum design load factor boundary of the V-G diagram had in essence already been established. The precedent not to design to the maximum recorded load factors of an airplane had already been established in Reference 9, which states that, "If the attempt is made to design present service pursuit airplanes to take care of the highest accelerations so far observed, 10.5g, and still retain a factor of safety of 1.5, the

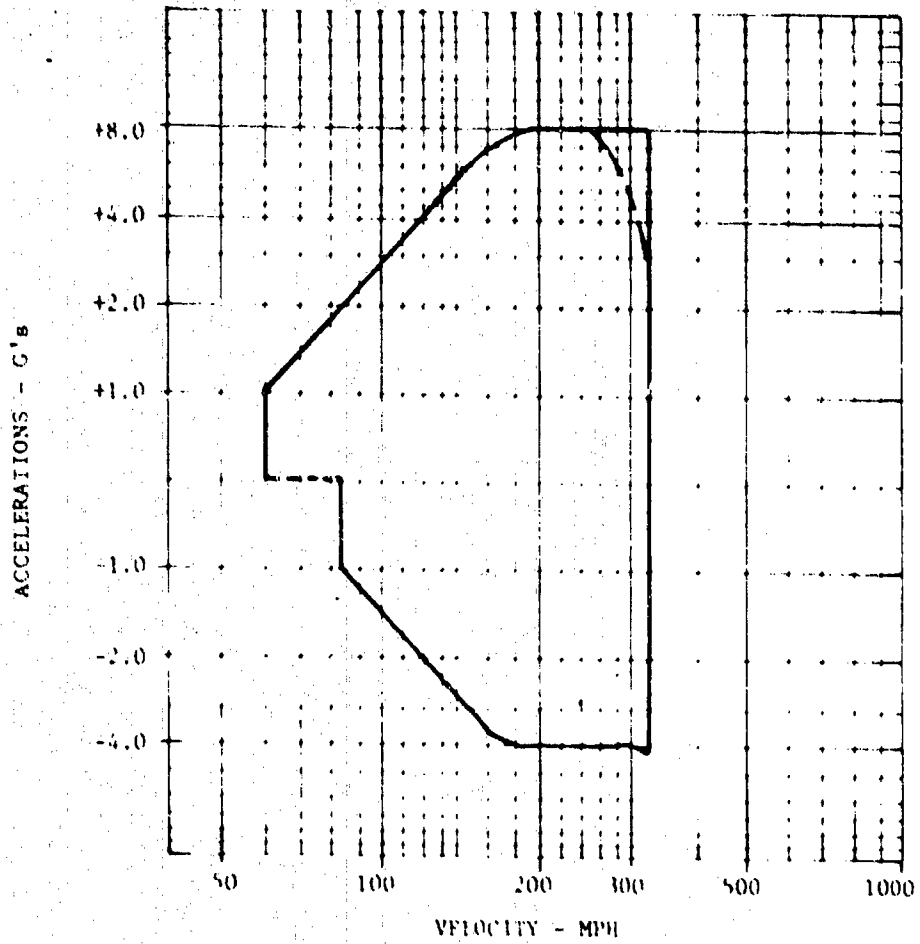


Figure 2. Navy V-G Diagram, Log-Log Coordinates and Rounded Corners (Reference 2c).

ultimate design load factor would have to be raised to 15.75." This high factor was felt to be unwarranted by virtue of the accompanying weight increase and loss in performance. Therefore, the principle of not designing to the maximum recorded load factors was recognized and the maximum load factor boundary for the V-G diagram was established by the load factors then in use.

Having agreed on the boundary of the V-G diagram, the question of how to use the diagram in conjunction with the factor of safety as a design and operational boundary remained to be resolved. The Army and Navy differed in opinion as to whether the V-G diagram should be an ultimate or a limit diagram. The Navy V-G diagram represented an elastic limit requirement. Yet the limit was difficult to define because the Navy did not have a fixed factor of safety. Appendix II of Navy Specification SS-1 (Reference 10) states that the ratios of ultimate strength to elastic limit strength should be equal to or greater than 1.35 for all conditions except the dive, in which case the factor is to be a minimum of 1.5. Wing cells were to be designed to any point within the V-G diagram without exceeding the elastic limit of any structural member and the horizontal tail had to sustain the maximum balancing load multiplied by 1.5 without permanent set, and by 2.0 without failure. The Navy also had a flight V-G diagram and a requirement that the flight loads should not exceed the elastic limit of the structure. Appendix II suggested a factor of 1.05 or 1.10 as the flight elastic true (yield) factor of safety.

The Air Corps study in Reference 11 recommended the adoption of a single factor of safety as a preferable alternative to the variety specified by the Navy. Since an Air Corps precedent for using a 1.5 factor of safety had already been established, it was recommended that the 1.5 factor be adopted for the V-G diagram. However, the Air Corps also recommended that the V-G diagram be an ultimate rather than a yield diagram as the Navy had been using it. The Air Corps proposed flight limits were to be two-thirds of the ultimate factors shown by the diagram.

AFFDL-TR-78-8

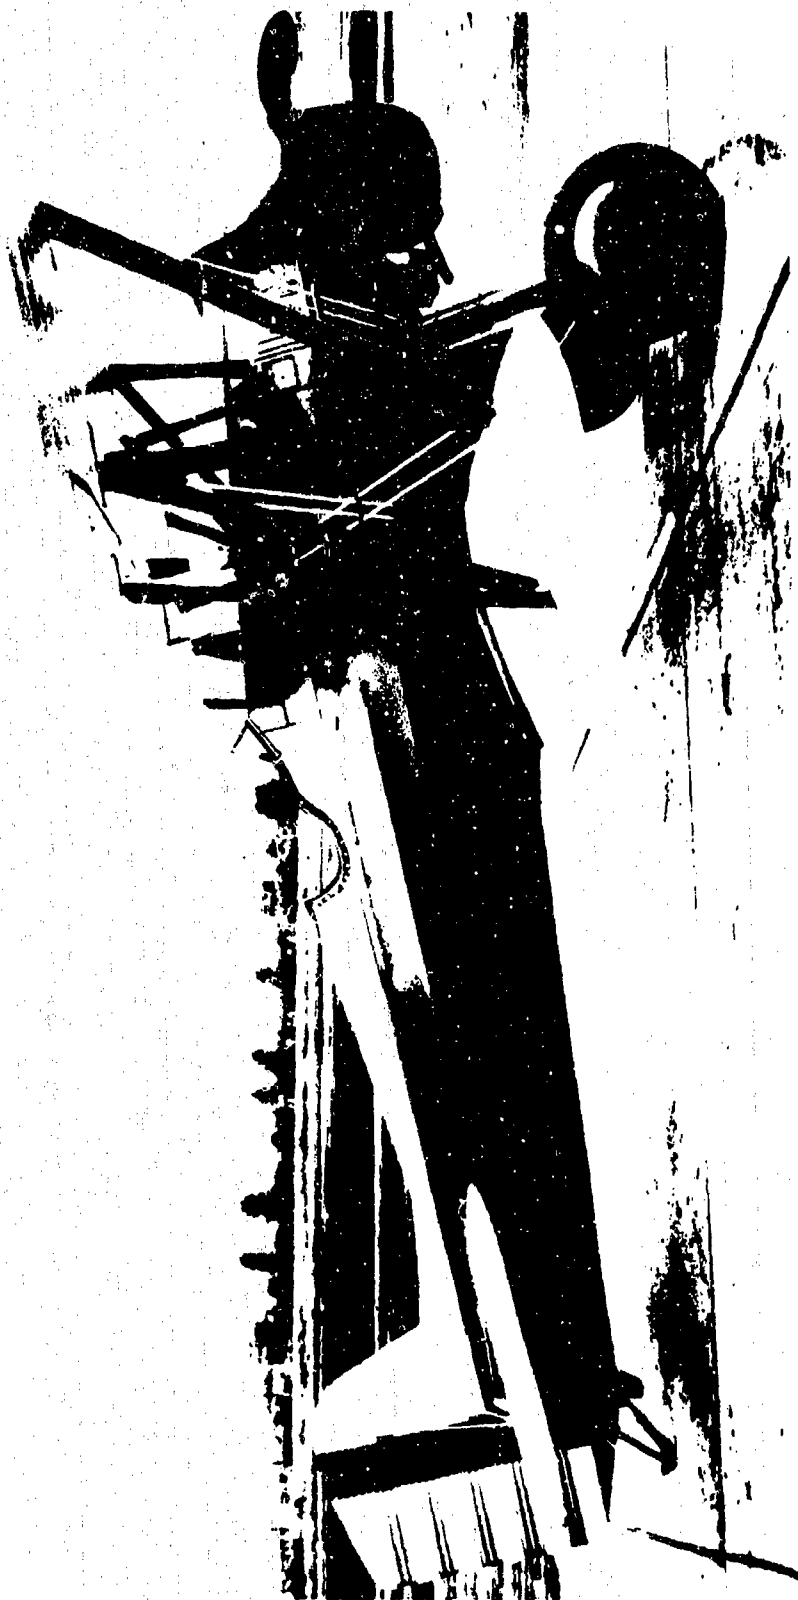


Figure 8. Boeing P-12C Airplane

STRESS ANALYSIS CRITERIA

BASIC FLIGHT CRITERIA

WINGS AND WING BRACING

ALIGNING GEAR

CONTROL SURFACES, INCLUDING FIXED SURFACES, AND AUXILIARY DEVICES

CONTROL SYSTEMS

ENGINE MOUNTS AND NACELLES

FUSELAGE AND HULL

FITTINGS

Figure 9. Specification X-1803 Classifications  
(Reference 2c).

The Aeronautics Bulletin No. 7-A retained the previously described factor of safety philosophy and the implied value of 2.0 until 1933. The 1934 revision involved a correlation of loading conditions with actual flight conditions and it was necessary to redefine the design or "ultimate" load factor. An "expected" or "actual" load factor was defined in conjunction with the ultimate load factor and a factor of safety. The ultimate load factor was divided by the factor of safety to obtain an "applied" load factor which was not allowed to cause any permanent structural deformation. The actual strength requirement in the 1934 issue of Bulletin 7-A states that, "The minimum factor of safety for any aircraft structure or component therefore shall be 1.50 unless otherwise specified. This requires that the ultimate strength of any member shall be at least 1.50 times as great as its critical applied load" (Reference 3b).

Over the years, some writers have attributed the origin of the 1.5 factor of safety to the characteristics of the newer 2024 aluminum (24SI at that time). It had a ratio of ultimate to yield stress of approximately 1.5. Actually, the precedent of a 1.5 factor of safety (for design tail loads) had already been established when the Air Corps formally adopted it for overall structural design. Mr. Epstein has stated in Reference 2c that material properties were not an Air Corps

This design philosophy was incorporated into Revision 6 of the HIAD, dated March 1934 and the 1.5 factor of safety became a formal Air Corps requirement. The use of an ultimate V-G diagram was later changed by the Air Corps to a design load factor diagram in August, 1936, when Specification X-1803 was issued. The original recommendation of an ultimate diagram was based on potential structural problems due to secondary wing bending effects in biplanes. By 1936 the rapid trend toward unbraced monoplanes replacing both biplanes and braced monoplanes in Air Corps procurement caused the original concern to disappear.

The original concern that led to the ultimate V-G diagram recommendation was related to the secondary nonlinear bending load effects with load factors found in the wing spars of biplanes and braced monoplanes. An explanation of this concern is given in Reference 1 and relates to a DH-4 wing test as reported in McCook Field Serial Report 2391. The report concluded that wing spars should have sufficient lateral bending strength to prevent a tendency to twist under some wing loading conditions. To prevent lateral spar failure, the strength requirement for the internal wing drag truss was increased 33 percent. The Navy engineers disagreed with those of the Army regarding the need for the additional factors and did not adopt them.

When Specification X-1803 was issued, this and additional drag truss design requirements were given as part of the Wings and Wing Bracing classification (Figure 9). To insure torsional rigidity, the design requirements for internal wing truss designs were increased as a function of the wing type and ranged from a factor of 1.33 to 3.0. These factors were used in addition to the 1.5 factor of safety. However, as previously noted, the 1936 change from an ultimate to a limit V-G diagram was solely the result of new airplane design trends. The change did facilitate the use of one diagram for both design and operation, but the desirability of a single diagram was already apparent when Reference 11 was prepared. Consequently, the 1934 Air Corps recommendation to use an ultimate V-G diagram was only reluctantly proposed because of the potential structural bending problems in biplane wings.

coincidental association with material properties) in that its adoption in conjunction with the use of the V-G diagram recognized "the principle of an airplane being limited operationally to a flight envelope within which it would not experience any significant permanent set."

He further notes in Reference 2c that, "the factor of safety of 1.5 has withstood many moves to alter it, but there was a period in 1939 when the Chief of the Structures Branch of the Engineering Division at Wright Field thought seriously of reducing the value of the factor. Newer aluminum alloys were becoming available with higher ratios of yield to ultimate strength and he interpreted the factor as the ratio of ultimate to yield. However, no action was taken when the following explanation was offered: 'The factor of safety is not a ratio of ultimate to yield strength, but is tied in with the many uncertainties in airplane design, such as fatigue, inaccuracies in stress analysis, and variations of material gages from nominal values. It might also be considered to provide an additional margin of strength for an airplane subjected to shellfire.'"

Finally, Mr. Epstein notes in Reference 1a that, "In subsequent years there have been various assessments made as to the significance of the 1.5 factor of safety but actually its origin (in USAF requirements) was an opinion of what was representative of service flight operations" (relative to design load factors).

The 1.5 factor of safety remains today in an intermittent state of assessment. Its use in U.S. airplane design practice has never been formally designated as a fixed design entity or as a single design entity, although it is often viewed in that sense. Other important structural design factors affect safety but they are normally viewed in a less rigid fashion. Each factor that has evolved is applied in a specific way. The 1.5 factor applies to the basic external ground and flight loads while other supplemental factors apply, for example, to pressurized cabins, castings, and fittings. The size of the safety factors selected usually depend on the design application, manufacturing

consideration. If they had been, 17ST, which was the aluminum alloy used at the time, would have dictated a factor of safety of 1.7, since it had an ultimate value of 55,000 psi and a yield value of 32,000 psi. The corresponding value of 4130 steel which was widely used at the time is 1.2. The 1.5 ratio for the newer aluminum, although not a direct influence on the decision to use a 1.5 value, did support the selection.

There were also opinions, as noted by Mr. Shanley in Reference 3a, which attempted to relate airplane operation and permanent set of the structure, or a lack of it, to the selection of the 1.5 factor of safety. This is often cited as the basic reason for the choice of 1.5 rather than some other number. The approximate 1.5 ultimate to yield stress ratios of commonly used materials and the apparent lack of permanent deformation appeared to mean that airplanes had not been developing more than about two-thirds of their design load factor in flight. Mr. Shanley points out that he was not convinced that the permanent set philosophy was a "sound argument, for at least two reasons: (1) It did not apply to compression members that failed by buckling, and (2) tension members were almost always critical at joints, for which the efficiency was generally below 80 percent." As previously cited, Mr. Shanley's main reason for favoring a 1.5 factor was to allow limit loads to remain relatively high (as opposed to the assumed factor of safety of 2.0). Since he also interpreted limit load as a requirement to preclude permanent set during normal operations, he concluded that the only significance to be placed on the two-thirds ratio was that it imposed no penalty on existing airplanes when working backward from existing load factors, using a factor of safety of 1.5.

From the point of view of the Air Force, the history of the 1.5 factor of safety can best be summarized by several of Mr. Epstein's observations. In Reference 2a, Mr. Epstein noted that the decision by the Air Corps to stipulate a 1.5 factor for subsequent design in conjunction with the V-G diagram was supported by, and not the result of, the fact that the 24ST aluminum alloy material then coming into use had a 1.5 ratio between ultimate tensile and yield strength. He felt that the adoption of the 1.5 factor of safety was much more significant (than any



## SECTION III

## DEVELOPMENT OF OTHER FACTORS OF SAFETY

As seen in the previous section, the 1.5 factor of safety did not evolve as the result of a concerted effort to derive a useful factor. It evolved together with other design requirements as part of an overall desire to rationalize structural design criteria. Other commonly used factors of safety also evolved in a similar but more direct fashion than did the 1.5 factor of safety for airplanes.

The history of the 1.25 factor of safety for missiles as a requirement is relatively complete. The factor evolved as part of an overall effort by the Army, Navy, and Air Force to develop strength and rigidity requirements for missiles. The derivation of the actual value of 1.25 which finally evolved is not as well defined, however, at least with regard to Wright Field records. The value seems to have evolved through a philosophical trial and error process. Missile strength and rigidity requirements, including the 1.25 factor of safety, were formally published by the Air Force and the Navy in Specification MIL-M-8856 (ASG), which was dated 22 June 1959.

Missile design requirements were actively pursued by both the Air Corps and the Navy but they were preceded by those of the pilotless airplane. In 1945, the Air Corps compiled requirements for such vehicles. The document, "Stress Analysis Criteria for Winged Missiles," did, in effect, apply to pilotless airplanes and was derived from Specification C-1803-17. This specification retained the airplane factor of safety of 1.5. The Navy wrote a "General Specification for the Design and Construction of Pilotless Aircraft," in April, 1949. This document was referred to the Aeronautical Standards Group (ASG) by the Navy in December, 1949. A letter from the ASG to the Chief of Ordnance (Pentagon), recommended coordination of the specification with all branches of the services.

AFFDL-TR-78-8

standards, and the intended operational use of the airplane which existed at the time they were adopted. Since circumstances change, a review of the origin of each factor is always of interest and worthwhile. Perhaps this review will help place the significance and future applicability of the 1.5 factor of safety in proper perspective.

The remaining sections will discuss the history of other well known factors of safety and variations to the factor of safety design concept from an Air Force perspective.

coordination until July, 1966 and all activities were terminated in March, 1966. The remaining tri-service coordination activities were assigned to the Navy Bureau of Aeronautics, Director of Standardization.

Changes continued to be made to the "final" draft and several iterations evolved. In the June and December 1967 drafts, the factor of safety was reinstated but in a different form than had been used previously. A choice was given to the user. He could select factors of 1.0 yield and 1.33 ultimate; or 1.15 yield and no ultimate factor. Why this choice of factors was inserted and why the 1.33 was selected is not clear from available Air Force records. The 1.15 factor was a standard Navy yield design factor and originally recommended for missile applications by the Navy, as previously stated. The 1.33 value was a common factor used for pressure vessel designs, which was a major design aspect for many missiles. The apparent intent was to allow reasonable design trades between structural components which were designed principally by pressure considerations and those that were not.

A revision to the December, 1967 draft, dated September 1968, revised that factor of safety to 1.0 for yield stresses and 1.25 for ultimate stresses. This represents an apparent change in Navy design philosophy. The 1.15 ultimate factor was retained for handling and flight launch design conditions. The December, 1968 draft and the final published specification retained these factors which are still in use. Although MIL-M-8850 was published in final form as an Air Force-Navy specification, the Army still retains an interest in it and is kept informed when revisions are made.

The most interesting aspect of the missile specification is not the formal introduction of the 1.25 factor of safety to structural design but the introduction of probabilistic design techniques. The specification requirements stipulated that "all combinations of loads and loading conditions having an acceptable probability shall be considered." A specific requirement was included for the design limit incremental gust response on a reliability basis. A probability of exceedance was stipulated for the design of air-to-air, surface-to-surface and surface-to-air missiles. Structural load responses to gusts were to be derived

AFFDL-TR-78-8

In 1952, a tri-service Guided Missile Task Group was formed by the Office of Standardization, Defense Supply Management Agency. The task group was composed of five subcommittees, one of which was to prepare structural criteria and data requirements. This subcommittee first met in January, 1953. The Navy wrote the first draft of a guided missile strength and rigidity specification for the Criteria Subcommittee in February, 1953. This draft specification required a 1.15 factor on yield strength, a 1.5 ultimate factor for loading conditions hazardous to personnel or to the launch airplane, and a 1.0 ultimate factor for all other loading conditions.

The Air Force, prior to this time, had been using a variety of ultimate safety factors including 1.0, 1.15, 1.25, 1.30 for its winged and ballistic missiles. Occasionally, more than one factor was used on the same missile as occurred on the Matador. The ultimate factor changed from 1.15 to 1.25 between early designs and the "B" model. At the time the above Navy draft specification was written (1953) the Air Force had already informally established the 1.25 ultimate factor of safety as a standard value for missiles. This difference in Air Force and Navy factor of safety philosophy became very evident by the third meeting of the Criteria Subcommittee and the factor of safety became the most controversial issue to be resolved.

The matter was said to be "resolved," as noted in the next draft specification, by deleting the use of any specific factor of safety and allowing each user of the specification to insert their own value. This approach to the factor of safety disagreement appeared in what was termed the "final draft" of the specification in June, 1954. However, the actual finalization of the specification took considerably longer.

The Army had initially participated with the Air Force and Navy during the first few meetings of the committee but did not attend after October, 1953. The Army Ordnance Corps felt that the state-of-the-art did not warrant the issuance of a specification at that time. They did, however, submit comments on later drafts when they were circulated for coordination. The committee's final draft did not circulate for formal

stress. Because of the uncertainty related to the design of large, integral pressure vessels in combination with flight loads and temperatures, a 1.1 factor on yield was selected in combination with a 1.4 factor on ultimate. The study conclusions emphasized that high safety factors and high reliability are not necessarily equivalent, nor do they negate the problems of inadequate design practice or analysis, ineffective quality control, or prevent brittle material failures. The yield and ultimate factors were to apply to all combined aerodynamic, inertia, pressure, and thrust loads for both the solid and liquid propellant boosters then being considered. The liquid booster propellant tanks, however, when subject only to pressure loads, were to be designed to a 1.25 ultimate factor because the internal pressures were considered more predictable than those in a solid propellant booster.

The 1.4 ultimate factor of safety, as initially developed, was intended for a specific vehicle design, the X-20 booster. It was not intended for broader application or to be used without the 1.1 factor on yield stress. Its use established a precedent, however, and it has since been quoted in many publications. Presumably, the two factors are still considered applicable to current designs, since they have appeared in both Air Force and NASA design requirements for manned space vehicles.

Currently, both missile and space vehicle structural design philosophies are factor of safety oriented. However, the overall design requirements for these vehicles are more closely related to a reliability based criteria than are current airplane designs. In the next section, other basic concepts which relate to both airplanes and missiles will be reviewed. These concepts will include modifications to the conventional factors of safety and certain reliability based criteria interactions.

from the method found in NACA TN 4332 (Reference 13) and a definition of the atmosphere in power spectral density form was taken from NACA Report 1272 (Reference 14). The probabilistic gust requirements replaced the original discrete gust requirements found in early drafts of MIL-M-8856. The earlier discrete gust requirements were patterned after airplane requirements and were vigorously objected to by the aircraft industry. The industry also emphasized the need for a common atmospheric description for the design of the structure and the control system. Probabilistically defined wind and gust descriptions were included in the final specification.

In all, an extended period of time was required to develop, coordinate, and issue the original MIL-M-8856 (ASG) missile specification, but many of the requirements were new and never before formally coordinated between the Services.

A related side light is the development of the 1.4 factor of safety which is used for manned space vehicles. This factor originated within the Aircraft Laboratory, Wright Air Development Center (WADC). The factor was defined by the same office responsible for all other Air Force airplane and missile criteria (Reference 15). The 1.4 factor grew out of a laboratory study to evaluate the applicability of the 1.5 factor of safety for large separable boosters for manned space vehicles.

The Dyna Soar (X-20), manned maneuverable reentry system, was under development at the time and the booster systems were an integral part of the development. The manned glide reentry vehicle was being designed by the 1.5 factor of safety, but the factors applicability to the booster was questioned. The laboratory study considered the usual design, construction, and manufacturing limitations and interactions, but the material properties provided the major weighting factor. The ultimate to yield stress ratios for the two candidate Dyna Soar booster materials were nearly identical. To maximize structural safety and efficiency, the material characteristics were reviewed and safety factors were chosen to bring the design working stress closer to the design yield

their influence on current design practice. These variations to current factor of safety design concepts tend to blend with reliability-based concepts. One effectively leads to the other because some of the variations are an attempt to rationalize criteria and are intended to be a step toward a reliability-based criteria.

The operational environment has become increasingly hostile and more and more demands are made of the airframe. To improve airplane performance and accurately appraise structural design requirements, established criteria must be continuously updated and supported by adequate technology. The technical support must include analytical techniques for determining aerodynamic derivatives, vehicle dynamics, heat transfer, stress-temperature distributions, material properties after prior random exposures, a suitable means of qualifying a structure to actual or reasonably representative environments, and a satisfactory means of flight test demonstration. Regardless of the design concept, the parameters that affect the structure and its response must be further explored. A realistic appraisal of our current ability to guarantee the design of a reliable structure and to define the steps required to obtain a reasonable assurance of structural reliability is also required (Reference 16).

Statistics have formed a basic part of airplane criteria from the time that sufficient data were available to judge the reasonableness of values used for maneuver load factor and design gust (Reference 16). Material properties, sink speeds, and other parameters used for estimating fatigue life are also derived statistically. However, all current requirements for static strength call for a specific factor of safety to be applied to maximum expected loads even though some of the design parameters and resulting loads were statistically derived.

For about two decades, which span the 1950's and 1960's, two additional design concepts, "safe-life" and "fail-safe," have been used in combination with the factor of safety to design military airplanes for the fatigue or repeated load environment. Chief emphasis has been placed on the factor of safety and safe-life approaches. The fail-safe

#### SECTION IV

#### FACTOR OF SAFETY DESIGN CONCEPTS

The desire to rationalize design criteria has never ceased. Structural design requirements (military specifications, for example) are in a constant process of review and revision. Because of its encompassing influence on structural design, the factor of safety has received considerable attention in recent years. This attention, though, relates primarily to the factor of safety as a design concept. The specific value of the factor of safety is usually a secondary consideration. The actual value does not readily equate to a specific level of safety and it is difficult to judge the difference in safety as related by a change in factor from 1.5 to 1.4, for example. Similarly, the factor of safety concept does not readily equate to an identifiable design objective that provides or defines structural integrity. Integrity is achieved through many interacting design facets, some of which are obvious and some abstract. The concept primarily provides a safe operating margin between an operational and design level of strength. Just how "safe" this margin makes the airplane is always open to question because of numerous unknowns and parameter variations which affect structural loads, design, analysis, materials, operation, and the natural environment. Because of these unknowns and variations, the actual degree of structural optimization achieved is also questionable. The apparent high degree of structural integrity achieved by the factor of safety concept is often the result of indirect, intuitive considerations, and reactions to previous problems. Design and operational experience has essentially provided the basis for the acceptability of current requirements and the safety provided by the factor of safety concept. To overcome this apparent lack of precision, definition and objectivity, and improved design flexibility, the use of probabilistic techniques and reliability-based design criteria are often proposed.

Having reviewed the history of several well known factors of safety for airplane and missile design in Section II and III, we can now review a number of Air Force studies of variations to these factors and note



concept is added to a design when high reliability is required (as in transport airplanes) or when performance penalties are not incurred (as in fighter airplanes). The safe-life concept attempts to identify, through analysis and test, the fatigue critical areas of the airframe and offset problems which might occur within the specified lifetime of the airplane. This presents a conflict between the nonprobabilistic factor of safety concept and the probabilistic concept of safe service life. Faced with an increasingly complex operating environment and a demand for more reliable (economical) airframes, the designer has attempted to make the most of each concept. The factor of safety, a static strength parameter, will not provide for time varying effects, and the safe-life concept suffers from a lack of appropriate operational and structural component test data. Therefore, the task of designing a reliable structure has been to incorporate analysis methods which combine the useful functions of each concept (Reference 17).

More recently the term of "safe-life" has become obsolete and the terms "damage tolerance" and "durability" have been introduced. The design intent to provide structures that are safe and economical to maintain has not changed but the approach is different. The current Air Force design philosophy emphasizes both the damage resistance or tolerance to manufacturing or service induced flaws for some specified period of service usage and the economical maintenance of the airframe.

The term damage tolerance is not new, but the emphasis on assumed initial or service induced flaws in the airframe is relatively new. The damage tolerance concept is intended to minimize catastrophic structural failures due to the propagation of undetected flaws in critical locations. To contain the damage, fail-safe and slow crack growth design concepts are used. The fail-safe concept contains local damage by use of multiple load paths and tear stoppers. The slow crack growth concept protects safety by not permitting flaws to grow through unstable rapid propagation. This is done through inspections, or life limiting in the case of noninspectable structure.

The durability requirements emphasize low maintenance costs during the life of the airframe. The durability concept is intended to minimize airframe maintenance due to cracks and related structural degradation. The safe-life concept used a factor of 4.0 in predicting fatigue life and was a combined deterministic/probabilistic concept. In essence, the damage tolerance concept (which does not use a directly applied factor) can be considered as deterministic as the safe-life concept because the stipulated initial flaws are in fact, factors of safety on time.

The most argued "advantage" for reducing the factor of safety is the reduction in airplane weight and the accompanying increase in performance. An impressive discussion in favor of reducing the factor of safety to save weight is provided in Reference 18, which was written in 1954. The discussion considers permanent set, allowance for defects in material and workmanship, stiffness, and maneuver load exceedances. Proper accounting of these points during design is shown to support a decrease in airplane weight. The arguments seem factual and are still current. Some facets can be updated to today's design philosophies and technology to further support the contentions given. The advantages to reducing the factor of safety are shown by decreases in gross weight as a function of factor size and proportionate increases in performance for representative military airplanes. Of special interest is the note that airplanes frequently exceed design limit load factors and that such factors may require an increase, rather than continuing to count on the 1.5 factor of safety to cover such occurrences. The projected control of limit load factor exceedances by the use of entirely automatic flight control systems has not materialized for piloted airplanes but is quite common for missiles and space craft.

Reference 18 also points out the erroneous idea that the 1.5 factor of safety always provides an actual operational level of strength 50 percent above limit load factor. Structural design procedures assume a linear load increase between limit and ultimate load when the 1.5 factor of safety is used. Due to aerodynamic nonlinearities, some parts of the airplane reach loading conditions greater or less than

1.5 times the limit load when the airplane achieves ultimate load factor. Operational conditions and related design requirements also impose different strength requirements on specific components at different times. For any one design condition there will be an imbalance of strength distribution throughout the airframe. This can be minimized but cost, schedules, and the lack of appropriate aerodynamic load data early in design often hinder the development of a more efficient, or balanced, airframe. Then, again, there are many unknowns regarding the influence that a weight reduction program may have on the airframe in later years, or if the weight savings will significantly improve performance and reduce operational costs.

The significance of reducing airframe weight fractions below current averages in terms of performance, lifetime operational costs, and structural maintenance is difficult to evaluate. System dependency, the initial level of structural design conservatism, the increasing severity of operational environments, and damage tolerance design requirements further complicate the evaluation. Factual design interactions can be established best when design flexibility is highest, early in design. Yet, factual design and operational usage data are normally not well defined early in design. Weight reduction programs, often conducted after the fact, concentrate too heavily on reducing only airframe weight and minimally evaluate the many other less prominent but important performance and design interactions. Although cost savings are often correlated with airframe weight, the probability of actually realizing the theoretical savings shown, or projecting the impact of the savings on structural maintenance and reliability, are seldom evaluated. Many of today's aerodynamically efficient airplanes are volume limited, rather than weight limited, when loaded. Hence, the airframe weight saved does not necessarily provide a performance or operational advantage and could possibly be put to better use by improving the durability of the airframe. Unfortunately, very little factual data is available to accurately weigh the validity of these points.

Any change in structural weight is further reflected as an even larger change in gross weight. This relationship is described by a weight growth factor which is the ratio of the delta change in gross weight for each one pound change in structural weight. A certain range or value of weight growth factor can be used to describe an airplane category (transport, fighter, or bomber) but a specific factor must be calculated for each airplane to be accurate. Although airframe weight trends have not varied significantly in recent years, weight growth factors have been decreasing and the overall sensitivity of airplane performance and operating costs versus structural weight have also been decreasing. The reasons for the change in sensitivity are related to technological improvements. These improvements include the use of more efficient materials and construction techniques, greater aerodynamic and propulsion efficiencies, and higher internal packaging densities. Conversely, the structural weight trends (as described in Reference 19) show an insensitivity to higher strength to weight materials and related structural improvements. Apparently, increases in structural efficiency are offset by the imposition of more severe design and operational requirements.

The influence of current structural design concepts and packaging density can be illustrated by reviewing the wing content and structure of a current fighter airplane. The installed wing structure weighs about 1800 pounds. The primary wing bending strength is derived from the upper and lower wing box skins which weight about 735 pounds. A factor of safety change would have the largest impact on the wing skins which comprise about 40 percent of the total installed wing structural weight. A large percentage of the total wing weight is composed of the flaps, actuators, and seals. These and other miscellaneous components would not be greatly affected by a change in the structural factor of safety.

Recent examples of the factor of safety's influence on airframe weight have resulted from an unofficial Air Force design philosophy for experimental or prototype vehicles. The unofficial philosophy modifies

the normal airplane development cycle which includes a series of ground and flight tests to validate airframe integrity. Initial flight tests are normally restricted to 80 percent of certain design maneuver load levels, until ground static tests are completed to ultimate load levels. Flight test airplanes are normally instrumented and critical load points are closely monitored. Flight and ground test loads are then correlated and ground tests are repeated, if necessary, to further validate the structure for the actual flight loads before the airplane is released to fly at 100 percent of design limit load. Such testing is complicated, expensive, and time consuming. Although justifiable for an airplane system, when structural efficiency must be optimized, experimental and prototype vehicles cannot be as rigorously tested because of cost and time constraints. To insure equal flight safety at 100 percent of design limit load, without the extensive testing and associated delays, the following procedure has been established:

a. The experimental/prototype airframe or modifications to existing airframes are designed using a 1.875 factor of safety on loads, which is equivalent to a theoretical margin of safety of +0.25. The initial 80 percent flight restriction normally imposed on an airplane system is also equivalent to a +0.25 margin of safety.

b. The experimental/prototype airframe is stress instrumented at critical design points and proof tested on the ground to 110 percent of design limit load, to insure design/manufacturing integrity. The installed instrumentation is further monitored in flight and compared to the proof load results as a further safety check.

If this design procedure is used, the airplane is allowed to fly at 100 percent of design limit load capability without an ultimate load ground test and without reducing overall safety. Actually, the 1.875 factor and 110 percent proof load test provides a larger ultimate/limit ratio (1.7) than the conventional ratio (1.5). Therefore, testing to 110 percent of limit load is less likely to cause detrimental yielding of the airframe than conventional testing to 100 percent of limit load.

For the experimental/prototype vehicle, the philosophy imposes no real penalty because of its one-of-a-kind nature and flexible mission status. Two examples of this philosophy will be discussed in the following paragraphs.

The first example is a prototype Mach 2 fighter airplane design which emphasized exceptional maneuverability and typical mission objectives. This prototype design was to be built and used as a technology advancement demonstrator; the design was completed but manufacturing plans were cancelled. The technology objectives have been rechanneled to an existing airplane which will be modified instead. During the design of the proposed demonstrator, a dual airframe comparison was made using the 1.5 and 1.875 factors. The comparison evolved as follows:

a. The design requirement specified the use of a 1.875 factor for flight loads. Computerized design techniques and a highly detailed finite element structural model were used. The available design/analysis flexibility allowed the weight of the airplane and airframe to be established separately for both the 1.5 and 1.875 factors.

b. Two weight comparisons were then established: (1) The airplane gross takeoff weight using the 1.5 factor was 26,465 pounds. Using the 1.875 factor it weighed 27,056 pounds, or an increase of 2.2 percent. (2) The structural weight using the 1.5 factor was 5,095 pounds. For the 1.875 factor, it was 5,433 pounds, or an increase of 6.2 percent. These weights reflect a design service life of 12,000 hours (a service life of 3,000 hours and a scatter factor of 4.0).

The weight growth factor was calculated to be 1.75 (pounds gross weight increase for each pound of structural weight), which is a reasonable value for a fighter airplane.

The second example is the YF-16 prototype airplane. The 1.875 factor was applied to the flight loads and increased the structural weight by 6.6 percent when compared to the 1.5 factor. The weight

increase has not been detrimental to its overall performance and would be further minimized if the 1,000 hour design service life of the prototype airplane were increased. The weight increment caused by the larger factor to safety would be partly absorbed by the weight increase required to meet the service life requirements.

Using the same design analogy, a comparison of the weight increase required for different service lives can be seen in another design study of a fighter technology demonstrator of the same weight class. For a 1.875 factor of safety and a scatter factor of 4.0, the airframe delta weight increased about 25 pounds per 1,000 hours of service life. Because of the 1.875 factor, no additional weight was required to achieve the first 1,500 hours. Damage tolerance requirements were not applied during this study but they would have further influenced the airframe weight, increasing it to some degree. Similarly, the 1.875 factor would have lessened the weight sensitivity of the airframe to these requirements.

If, instead of increasing the margin of safety by 25 percent, it were decreased by the same amount, a similar airframe delta weight could be expected for the technology demonstrator. As noted in Figure 10, which is based on the first example, the factor of safety equivalent to the 25 percent margin of safety reduction is 1.125. The use of this "small" factor, when compared to the 1.50 nominal factor, would probably not be considered by a designer even if a large reduction in airframe weight were desired. The airframe weight reduction shown (6.2 percent) may be optimistic because the normal damage tolerance/fatigue life requirements are not incorporated. A 1.25 factor of safety is perhaps a more reasonable value to choose and is shown for comparison. It would provide an approximate 4 percent weight saving and a 16.7 percent reduction in margin of safety. These percentage weight changes and margins of safety are reasonable and reflect current jet fighter design technology trends. Similar data can be found for other airplane types in References 18 and 20.

<u>STRUCTURAL FACTORS OF SAFETY</u>	<u>STRUCTURAL DELTA WEIGHT</u>	<u>ULTIMATE MARGINS OF SAFETY</u>
1.125	-6.2%	-0.250
1.250	-4.0%	-0.167
1.500	0.0	0.000
1.750	+4.0%	+0.167
1.875	+6.2%	+0.250

Figure 10. Structural Weight and Margin of Safety Variations with Changes in Factor of Safety



Reference 18 reflects technology of the 1950's but the trends are still applicable. Data are given for fighter, bomber, and transport airplanes and factors of safety between 1.0 and 1.5. The average structural weight saving shown for the three airplane types using a factor of safety of 1.4 would be 2.5 ( $\pm 0.25$ ) percent as compared to a 1.5 factor. If a 1.25 factor of safety were compared to a 1.5 factor, the average structural weight saving would be 5.0 ( $\pm 0.75$ ) percent. Although these structural weight trends are still current, the range and gross weight trends in Reference 18 do not represent today's airplanes as well. The range increases shown for the lower structural weights assumed a weight growth factor of seven for all three airplane types and additional fuel was substituted for the gross take-off weight saved. Using these assumptions, jet fighters are shown, for example, to yield a 15 percent range increase and jet bombers a 5 percent range increase or an average of 10 percent for both airplanes. These range increases are based on a gross take-off weight and fuel adjustment that averages 15 ( $\pm 3.5$ ) percent when a 1.25 factor of safety is used. These gross weight and fuel adjustments would average 6 ( $\pm 1.25$ ) percent when a 1.40 factor of safety is used.

The weight growth factor of seven and the substitution of fuel for gross weight saved will give optimistic gross weight decreases and range increases today since weight growth factors are less. Factors in past years for airplanes have ranged from about five to ten. The weight growth factor for a fighter today would be about two instead of seven and for long range airplanes like bombers and transports a value of five would be appropriate. To illustrate, the trend in Reference 18 for a fighter and a weight growth factor of 7 gives a gross weight savings of 17 percent for a factor of safety of 1.25. The fighter technology demonstrator study gives a gross weight savings of 2.4 percent for a factor of safety of 1.25 and a growth factor of 1.75. For the same factors, Reference 18 gives a gross weight savings of 13 percent for a bomber as compared to 6 percent in Reference 20, which used a growth factor of 5.50. These are only trends, however, and they are debatable, since weight estimating and the establishment of weight growth factors

is a sensitive art. To establish accurate values, the factors must be based on a detailed evaluation of a specific airplane and its basic missions.

Reference 20 presents a simplified but constructive parametric study of the factor of safety. Three different vehicle types were selected and designed using a range of ultimate factors of safety. For comparison, three other structural design concepts were included: the modified factor of safety concept defined in Reference 21, Part I; a yield factor of safety concept; and a reliability based concept.

The conventional factor of safety was applied to the limit design loads of each vehicle in increments between 1.0 and 2.0. The modified factor of safety concept applied a factor of 1.05 to speed, 1.15 to maneuverability and 1.10 to design loads. A yield philosophy applied factors of 1.0 and 1.10 to design limit loads.

The demonstration included cruise, ballistic, and glide reentry type vehicles. Although hypothetical mission profiles and performance figures were used they were patterned after real vehicles and designed to realistic structural requirements. The structural concepts used were monocoque, semimonocoque, truss, pressure stabilized, and sandwich honeycomb. Two structural concepts were applied to each vehicle, as appropriate to the vehicle type, and radiating and ablative thermal protection systems were applied separately to the reentry vehicle.

The conventional factor of safety philosophy normally considers only one factor to establish ultimate design loads, without regarding the variables contributing to the limit loads. The yield design philosophy uses a single factor of safety to prevent the design limit stresses from exceeding the material yield stress; an ultimate load factor is not used. The modified factor of safety philosophy also applies a factor to the design limit loads but these loads are first established by factoring two performance parameters, as previously noted

A reliability based design philosophy normally considers the statistical distribution and the probability of the combined occurrence of a finite number of structural design factors in order to establish design loads. In Reference 20, the various factor of safety design philosophies were also compared to a structural reliability value. The reliability value was established by considering the statistical distributions and the simultaneous occurrence of two statistically variant design factors.

The parametric study considered both rigid and flexible structure and aerodynamic heating effects when applicable. Weight, weight distribution, and stiffness characteristics were determined for each major component. These parameter variations were correlated to each vehicle's performance and structural reliability.

The scope of the investigation can be considered limited in that the structural concepts used were simplified, the analysis methods were not elaborate, and only one critical design point was selected for each vehicle. However, structural weights were optimized, the effects of plasticity were accounted for, and interaction equations were used to account for local and general instabilities caused by combined loading.

The vehicle design is similar to a B-52 bomber in performance, size, weight, and structural flexibility. Gust and maneuver were the critical design conditions. These two parameters formed the loading interaction curves used to establish an equivalent reliability based design, as shown in Figure 11. By using available gust and maneuver statistics, the most probable combination of the two design parameters that could cause structural failure at each strength level were located on the interaction envelopes, as shown in Figure 12. Although not an optimum design, considering the complexity of other reliability based concepts, the most probable failure point is used to illustrate that a lighter structure can be achieved by a reliability based concept as compared to a factor of safety concept, even though both provide the same (theoretical) reliability.

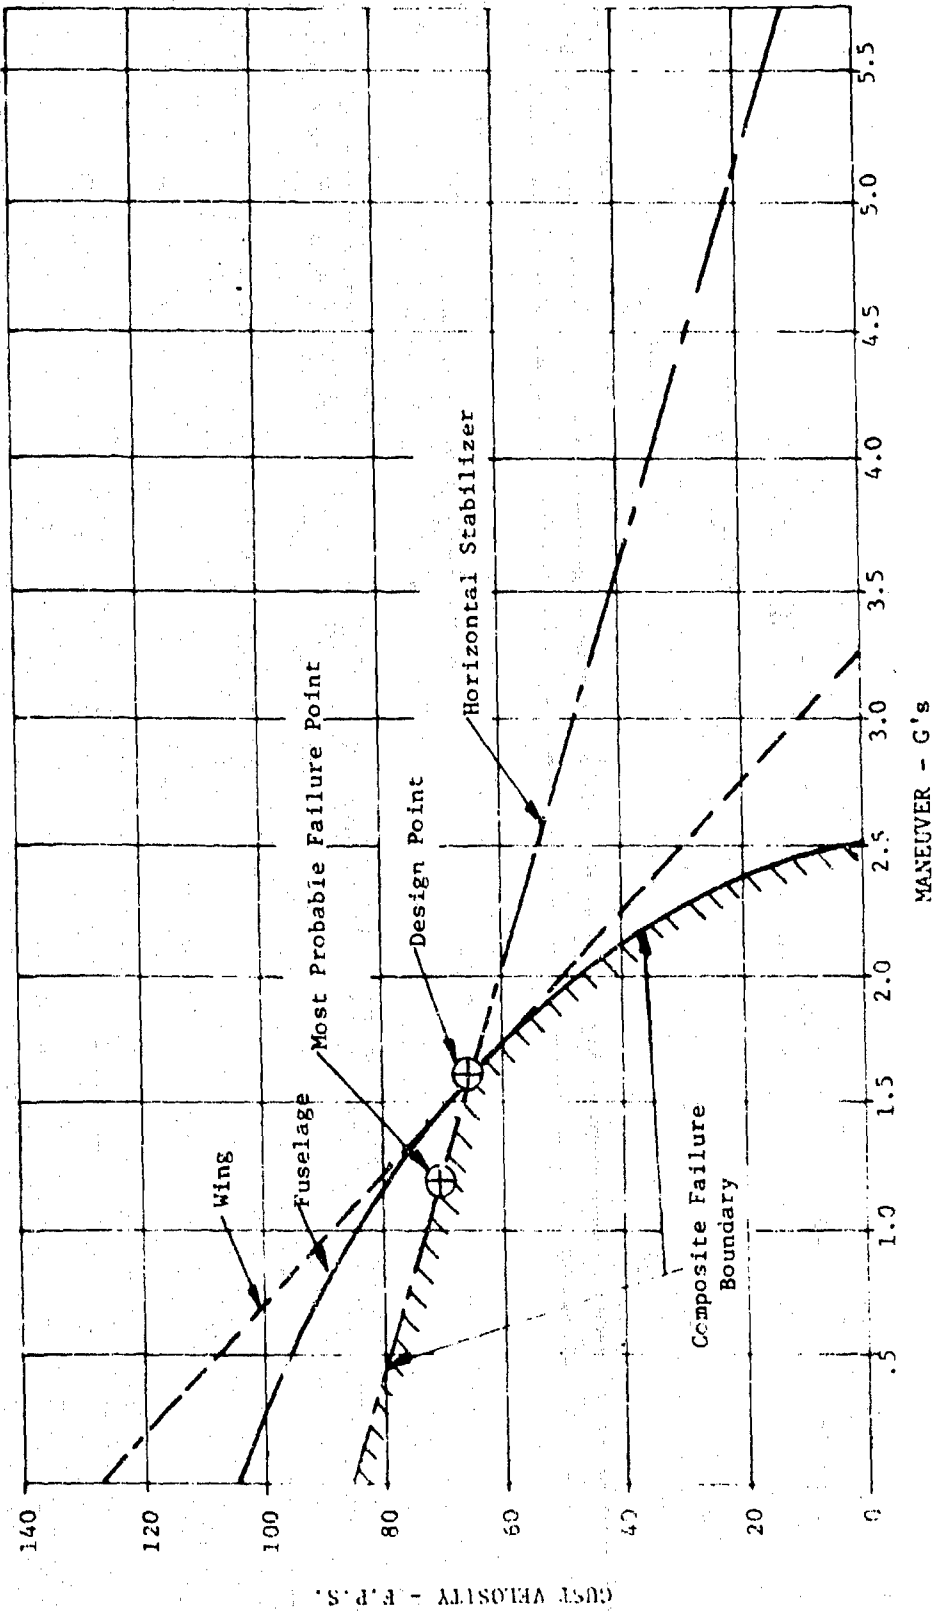


Figure 11. Example of Interaction Envelope Construction (Reference 20)

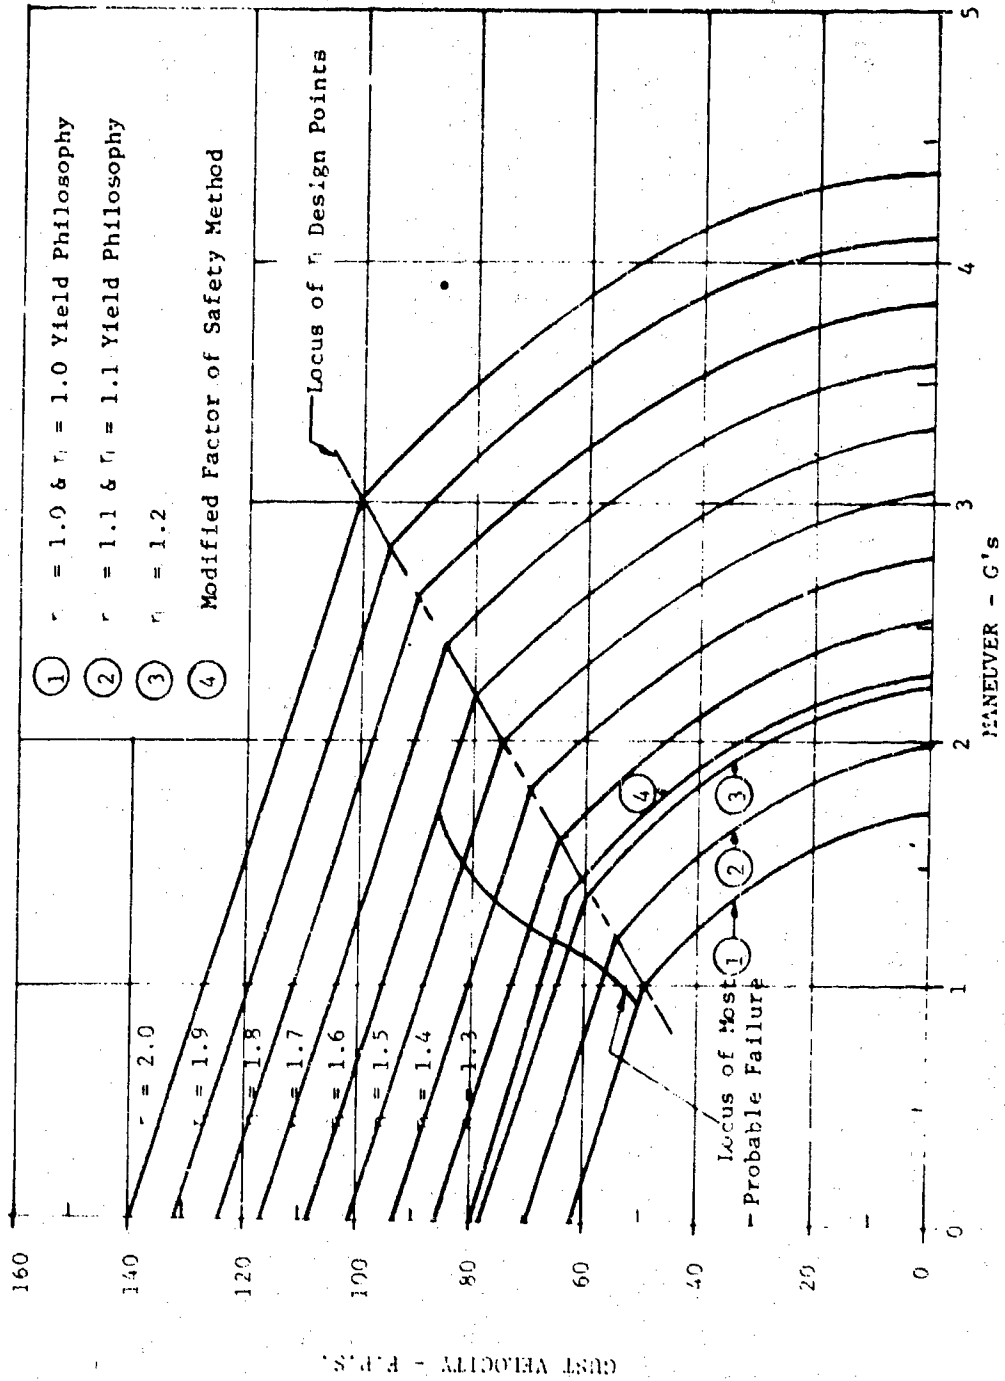


Figure 12. Structural Limitations Large Cruise Vehicle (Reference 20)

The weight reduction for the equally reliable design is achieved by bringing the strength of the individual components closer together. This is similar to using different factors of safety to contour the shape of the interaction curves of overstrength components to fit the shape of the composite failure boundary of the vehicle. This takes advantage of the fact emphasized in Reference 18 that all components do not reach 150 percent of limit load simultaneously. Part of the study results for the cruise vehicle are shown in Figure 13.

The range increases shown in Figure 13 are the result of decreases in the inert (empty) weight of the vehicle. The ratio of inert weight change to structural weight change is about 2.0 and the growth factor between structural weight change and gross take-off weight change is about 5.5. The decrease in inert weight due to the structural weight change, for example, when using a 1.25 factor of safety is about 11 percent, which increases the range 1.6 percent. The dramatic performance increases often seen in such comparisons is not seen here because of the more realistic value of the weight growth factor. The substitution of fuel for either the inert or gross weight saved, although a fuel substitution for inert weight saved is shown, is not considered a realistic design trade. The performance of a specific airplane design is normally optimized using available fuel volume; any additional structural weight saved as a result of a concerted weight reduction program would normally enhance the performance based on the original fuel volume, independently of additional fuel.

Fatigue life and flutter were not design considerations in Reference 20 and their interactions are unknown. Similarly, the probabilities shown in Figure 13 are based only on the interaction of gust and maneuver loads and do not consider other facets such as material properties and workmanship that would also affect the structural reliability.

The gross trends established in Reference 20 should not be significantly affected by the limited scope of the study and the use of

<u>Structural Design Concept</u>		<u>Weight Change</u>		<u>Wing Root Stiffness</u>		<u>Range Increase</u>	
<u>Factor/Eq Rel.</u>	<u>Reliability</u>	<u>Structure(1.0)</u>	<u>Inert(2.0)</u>	<u>Gross(5.5)</u>	<u>Bending</u>	<u>Torsion</u>	<u>Inert Wt w/Fuel</u>
1.50 Factor	$10^{-21.5}$	1.000	1.000	1.000	1.00	1.00	1.000
Eq Rel (1.5)	$10^{-21.5}$	.984	.968	.980	.87	.94	1.004
1.40 Factor	$10^{-14}$	.979	.958	.977	.93	.97	1.006
Eq Rel (1.4)	$10^{-14}$	.962	.924	.958	.81	.92	1.011
1.30 Factor	$10^{-8.3}$	.957	.913	.953	.87	.94	1.012
Eq Rel (1.3)	$10^{-8.3}$	.943	.886	.937	.76	.90	1.016
1.25 Factor	$10^{-6.2}$	.945	.889	.940	.83	.93	1.016
Eq Rel (1.25)	$10^{-6.2}$	.938	.875	.932	.74	.90	1.017

Figure 13. A Comparison of Weight and Performance Changes with Different Factor of Safety and Reliability Concepts for a Large Cruise Vehicle, (Reference 20)

simplified structural models. As a general trend, the reliability based design concept provided a lower structural weight and better performance than did the factor of safety concept having an equal reliability. The modified factor of safety concept gave results closer to the reliability based concept using two parameters than did the single factor of safety used to obtain the ultimate design loads.

Theoretically, a higher confidence can be placed in a structure designed by a reliability concept than by a factor of safety concept because the actual reliability of the factor of safety design is never known. The reliability based concept, by contrast, considers the statistical nature of the design parameters and thus acquires a known reliability and the associated confidence level of the statistical data used. In a practical sense, however, this is not true because the design parameters are not well defined and the actual reliability of the structure cannot be authenticated.

The modified factor of safety concept, as incorporated in the comparative factor of safety study in Reference 20, is documented in Reference 21, Part I. The concept was developed as an interim design method to be used until a larger number of parameters could be defined and a formal reliability based concept established. In Reference 21, forty-one design parameters are described as significant to a reliability based structural design concept. Fifteen are related to the design environment and operating conditions. The related analysis parameters are: aerodynamic forces, propulsion system forces and pressures, material properties and property variations, thermal stresses, creep of materials, weight and weight distribution, component misalignments, construction, propulsion system thrust misalignments, aeroelasticity and aerothermoelasticity, buffeting, flutter, shock and vibration, workmanship, fatigue, noise, fuel sloshing and surging, structural temperature, ablation, corrosion, oxidation, and erosion.

As a concept, the modified factor of safety can be applied to any vehicle design but it was originally developed for missile design application. The use of three parameters seemed feasible within the



current state-of-the-art and the concept is considered to be more rational than the ultimate factor of safety concept because it recognizes parameters other than load as significantly affecting structural integrity and reliability. Although the structural reliability of a missile design using the 1.25 factor of safety could not be given a numerical value, the reliability seemed high, and the three factors selected (1.05 on speed, 1.10 on loads or "quality," and 1.15 on maneuverability) were chosen to give a combined strength effect similar to that provided by the 1.25 factor. The 1.05 factor on speed is significant because, for some missiles, small increases in speed result in rapid degradation in structural capacity due to material degradation with rising temperature. Thus, with the initial design based on a higher speed (and hence higher temperature) the designer is forced to avoid the use of materials which are unduly sensitive to temperatures. The 1.10 "quality" factor is applied to the structural loads incurred at specified maximum design conditions rather than at conventionally defined limit conditions. This concept more rationally accounts for the nonlinearities in aeroelastic and aerodynamic data that frequently occur between limit and ultimate (design) conditions. The 1.15 factor is applied to the maneuver load factor to protect the vehicle from inadvertent maneuver exceedances.

The modified factor of safety concept was used to design the ASSET glide reentry vehicles. ASSET is an acronym for Aerothermodynamic/elastic Structural Systems Environmental Tests. The ASSET program consisted of designing and flying a series of winged glide reentry vehicles which were boosted into suborbital flight paths. Each vehicle was designed to explore an area of glide reentry technology that could not be defined in existing ground test facilities. Structural flight test results and data correlations which substantiate the adequacy of the design concept, at least for vehicles having a programmed trajectory, is given in Reference 22.

For an airframe that is not aerodynamically heated, the load factor parameter is usually sufficient to convey its overall strength capability.

With the introduction of transient stresses and reduced material properties due to thermal gradients and high temperatures, there is no simple method for conveying strength capability (Reference 23). Although a thermal factor of safety is not necessarily a true factor of safety in the conventional sense it represents a design concept that is intended to provide an equivalent measure of conservatism and confidence in the heated airframe as that provided by the conventional factor of safety in the cold airframe.

To date, unofficial Air Force policy has been to avoid using any factor on temperature, heat transfer, or on time at temperature for airplanes. This has been a reasonable policy since service experience has demonstrated that there is little problem in keeping within a speed-altitude design envelope. Thus, in a sense, the temperatures normally used for design represent the actual maximum to be expected for the structure. This philosophy of not factoring temperature is an apparent contradiction when compared to the philosophy of factoring limit load, which is also considered the maximum to be expected (Reference 16).

The factors of safety used in conventional airframe design to incorporate conservatism also apply to aerodynamically heated airframes but the conventional factors do not account for the additional uncertainties associated with elevated temperatures. The additional conservatism must relate directly to the uncertainties associated with the prediction of structural temperatures and thermal-structural design analysis. However, the fact that an airframe may have been built to resist aerodynamic heating effects does not necessarily imply an increase in conventional design and manufacturing deficiencies. Initially, the use of relatively unfamiliar materials and forms of construction in the heated airframe and the need for computing structural temperatures with only a limited amount of flight test information, does tend to increase the likelihood of deficiencies. In time, however, these considerations improve and the modification of conventional structural safety factors is not warranted (Reference 24).

As part of an overall Air Force effort to establish a rational design criterion for aerodynamically heated airframes, the velocity factor has evolved as a simple and expedient way of providing and controlling thermal-structural design conservatism throughout the design cycle. The details of this concept are developed in Reference 24. The techniques investigated included factoring structural loads, temperature or heat flux, angle of attack, velocity, and atmospheric density. It concluded that only factors on velocity or structural temperature (or heat flux) are likely to provide an adequate margin when considering the exceedances of performance variables. Of the two choices, the factor on velocity is considered the more logical. The velocity factor provides conservatism in a uniform way at each point in the design mission as a function of Mach number and the selected size of the velocity factor controls the imposed conservatism.

A thermal factor of safety on loads would introduce an arbitrary (unknown) conservatism; however, a direct, rather than a presumed, margin of safety would exist at the operational level if margins were placed on performance variables instead. Factoring a performance parameter (speed) provides conservatism in a way parallel to that achieved by factoring loads and is preferred to factoring temperature or heat flux since performance margins introduced over operational levels are more evident and controllable.

By requiring a design speed beyond limit, the velocity factor, is in a sense, a factor on heat transfer. However, to specify a direct and specific factor on heat transfer would be a design weakness, in that a number of analytical techniques may exist for a particular area and flight regime, with a large spread in the values they provide. From a structural point of view, the factor of safety should be associated with a particular analytical method. For ablation, varied factors of safety have been used (generally to factor the thickness of the ablator), with different considerations being given to each particular flight application and for applications of the material as an insulator. A factor may also be used to represent a combined factor on heat transfer and on

the scatter of the ablative material characteristics. Factors of safety relating to thermal-structural applications can only have meaning when related to the trajectories or flight paths for which they are needed. A factor of safety on a nominal trajectory may be appreciably higher than those corresponding to design trajectories based on a broad parametric investigation or one which places a margin on altitude which represents a factor of safety on temperature (Reference 23).

No single technique can be expected to provide conservatism in a rational way for all contingencies. At best, one type of factor will come closest to providing the desired conservatism and this has been true of the velocity factor. Its use seems reasonable in view of existing factor of safety precedents. A specific design requirement for aerodynamically heated airframes is being formulated and tested by design application. The basic criteria is conventional but it is modified to incorporate the velocity factor concept and attempts to account for many of the design and analysis variables which affect thermal-structural design. The criteria have not been finalized and are based primarily on References 16, 23, and 24, which provide insight to time related load and temperature interactions and the selection of critical thermal-structural design points.

Most of the studies and design concepts reviewed in this section have evolved as an attempt to further rationalize structural design criteria. As previously noted, these variations to the current factor of safety design concept tend to blend with reliability based concepts. The next section will discuss certain reliability based concepts investigated by the Air Force, related design parameters, and data collection programs.

## SECTION V

## RELIABILITY BASED DESIGN CONCEPTS

The number of publications treating reliability based design increased appreciably in the early 1950's. Initially, reliability design seemed to imply, at least within the Air Force, the elimination of the factor of safety as a design concept. Statistically defined design parameters and parameter interactions were to be substituted for the discrete parameters and the factor of safety. Too often, however, the magnitude of the problem was overlooked and the acquisition of essential elements were overly simplified.

The Air Force initiated the development of a reliability based structural design criteria for missiles in the mid 1950's. Missiles were one shot devices and unmanned. There was little to lose. Airplanes in turn, were to become mere missile launching platforms that would not require strength for rigorous design maneuvers. Combat was to be conducted remotely. During this swirl of revised commitment to systems development, the Air Force established a program to conduct a series of investigations that were to encompass and define the total life cycle of a missile. Considerable priority was given to this effort. The rationalized criteria were to be based on information obtained through data gathering programs and operational experiences. The broad goal was to establish a reliability based structural design criteria to replace the factor of safety for missiles. This rationalized criteria was to be placed in the new structural strength and rigidity specification MIL-M-8856, initially dated 22 June 1959. However, the data base never materialized, the 1.25 factor of safety is still used, and the emphasis to develop a reliability based criteria for missiles has diminished.

When the need for a reliability based criteria is considered, a comparison is usually made to existing design requirements and the need is often questioned: "Why are reliability based criteria required when current requirements and industry practices have produced airplanes

having a (seemingly) high reliability?" The answer that evolves must in some way relate to realism in design. A reliability based design concept, as stressed by some in the literature, is inevitable and is the only means of providing greater realism; the only way of rationalizing the factor of safety concept.

The Air Force first deviated in a significant way from a deterministic design concept by defining probabilistic fatigue design requirements. Although they were applied deterministically in the final analysis, the realism that operational, environmental, design and manufacturing variations preclude the development of no-failure airframes was implicitly emphasized. This is further emphasized in the later changes in Air Force philosophy by changing from a safe life concept to a damage tolerant concept, as described in Section IV.

A related change in design philosophy should also be noted. In 1960, in conjunction with the Navy, the MIL-A-8862 (ASG) Specification, "Airplane Strength and Rigidity, Landing and Ground Handling Loads", was established and incorporated an unfactored design load concept. This concept applied only to the landing loads analysis. Limit and ultimate loads were not specified for these conditions. The incentive to deviate from the 1.5 factor of safety concept was the realism provided by available operational statistics of the type described in Reference 17. A general dissatisfaction with the design load concept resulted in a change back to the use of a 1.5 factor of safety in the 1971 Air Force revision of the specification which became MIL-A-008862 (USAF). However, the design load concept for landing loads is still viewed favorably and is being used by the Navy.

The Air Force only applied the design landing load concept to two airplanes. On one airplane the concept was applied to the first two models; later models of the airplane were changed and redesigned using the 1.5 factor of safety. Unfortunately, the limited application of the design landing load concept also limits the experience base available for evaluation. Apparently, there was very little, if any, penalty

involved between the models which employed the two concepts. The infrequent application of the design load concept and its eventual elimination from MIL-A-8862 can be traced to: (1) an Air Force requirement that transport airplanes be compatible with and certified to FAA requirements; (2) a lack of clarity in the specifications and differences of opinion regarding which loads are affected by the design load concept and which ones are not (carry through structure, nacelle attachments, external tank and store attachments, etc.); (3) difficulties in the interpretation of interactions with other requirements relating to material yielding and aeroelastic effects; and (4) the added difficulty of applying static test loads to the airframe through the lower strength landing gear. The overriding reason for these implementation problems, however, appears to be poor planning. The concept was conceived and implemented too quickly and without appropriate trial applications. No loss in design efficiency is expected, with respect to static strength requirements, by using the 1.5 factor of safety. Current durability, damage tolerance, and dynamic taxi requirements will add more weight than could be saved by using either the design load concept or the factor of safety concept.

Design philosophies, such as those noted above, evolve over a period of time and revisions normally follow a series of trial and error applications. Basic philosophies are formally adopted and maintained in specifications and handbooks. The design specifications and handbooks preserve past experiences, correct previous mistakes and prevent design oversights. This effort attempts to maximize structural integrity and reliability but the concept is not foolproof. New mistakes are always possible with the rapidly changing state of the art and the increasing severity of the operational environment. Because of these complexities, the documents are difficult to keep current and new or revised design requirements are normally written into the statement-of-work for any new system development, if they occur between the revision intervals of a specification. Criticism, then, that certain specifications are not current or that certain requirements are not rational, may be correct but they do not hinder new system developments. When similar criticisms

are leveled at the 1.5 factor of safety, however, the evaluation is not so simple: should it be replaced with a reliability-based concept? What is generally not appreciated is that the basic airplane design loads (static strength) are essentially statistical in nature. The design values are derived from a broad spectrum of operational experiences. If a distribution were assumed, then the design limit and design ultimate loads would represent a certain probability of occurrence and exceedance (Figure 14). A justifiable criticism of the factor of safety, though, is that a fixed factor does not recognize the variation of load or strength and does not provide a uniformly efficient structure (Reference 25). This effect was illustrated in References 18 and 20, as discussed in Section IV.

Unofficial Air Force recognition of a variable factor of safety concept has been established by allowing certain structural design deviations. The static test failure of an engine inlet duct at 1.3 times the limit pressure, for example, was accepted when it was established that the internal dynamic pressure in the duct would not exceed the design pressure in a dive. The resultant delay, redesign, and cost to bring the duct structure up to the normal strength level of 1.5 times limit pressure was therefore avoided (Reference 25).

The Air Force has not formally adopted a reliability-based structural design criteria, although some requirements have an associated probability of occurrence. Available procedures that could be adopted vary in concept and detail but their philosophical principles are the same. References 26 and 27 summarize some of the philosophical aspects that appear in the open literature and also note the complexity of the reliability based design problem, as paraphrased in the following two paragraphs.

The many proposals for a more rational criteria are related to the appearance of new structural materials which exhibit improved strength and stiffness or weight characteristics. Other considerations are the extreme increases in the structural loading environment and concern with



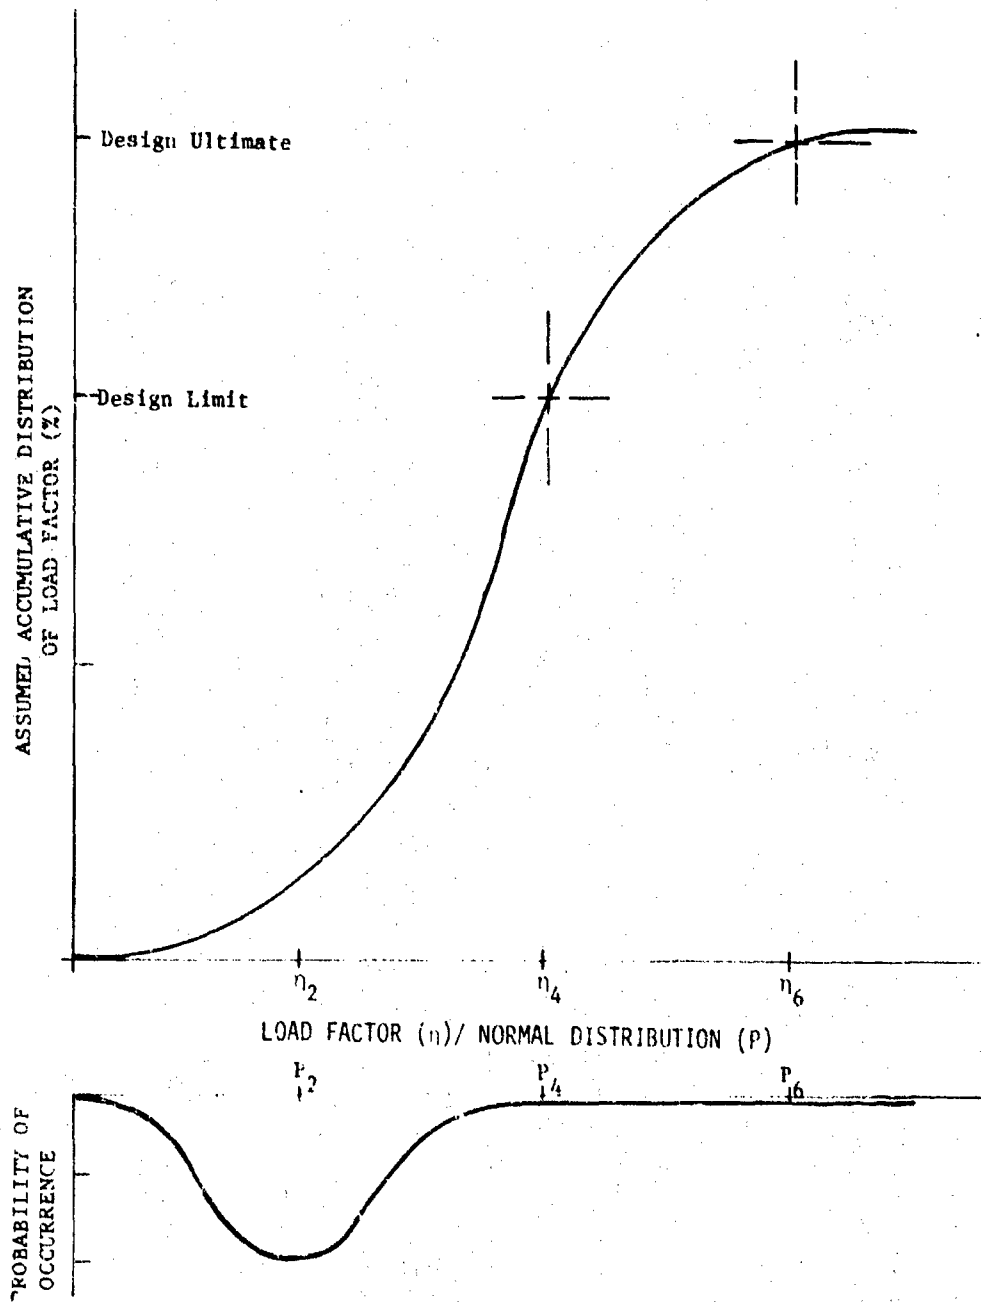


Figure 14. Statistical Representation of the Factor of Safety Design Concept

economic costs. Designing to an acceptable risk while keeping all design factors in proper economic perspective would seem to be effective but the concept of risk must be quantified before an acceptable risk level can be determined. The new materials also tend to exhibit variations which could, in a deterministic design, require such large factors of safety as to nullify the improvements. The increase in extremes of the structural load environment are primarily new to the civil engineering field while economic costs are perhaps new to the aeronautical field. [Reference 28 notes that the aeronautical engineer has for many years considered new failure criteria (fatigue and creep), new materials and construction (brittle materials and fibrous weaves), and more complex loading conditions (temperature-load histories). This has resulted in greater variability in the applied and failing loads than has been encountered in the past.] Picking the worst possible load conditions for design is no longer considered economically feasible under a broad spectrum of load conditions and the statistics of extremes must be considered for rational design. Reliability based analysis permits a more consistent approach to structural safety by including the statistical variability of load and strength in the factor of safety evaluation (Reference 26).

Most of the early studies in probabilistic design considered only the fundamental problem in which all of the strength variables and the load variables were lumped into two random variables. These studies concentrated on the effects of different safety factors, coefficients of variation, and frequency distributions. Later studies included multi-member and multiload structures, different levels of failure, and the application of decision theory. Several problems must be considered in the context of a reliability based design. First is the reliability analysis of structures with derived or assumed probability distributions for random variables, including load and strength distributions; developing and constructing the necessary computational models which account for indeterminacy, the types of failure modes (including elastic, brittle, and collapse modes), the number of load conditions and failure modes, and their statistical correlation. Another problem is the design of a structure in the context of a random variable of

safety for a given probability of failure; the random variable could be cost or weight. An additional problem is that of parameter sensitivity and determining their effects in the load and strength descriptions. Most reliability analyses assume that strength and load distributions are known. The high cost of obtaining load and strength data will probably necessitate the acceptance of lower confidence levels in structural design than professional statisticians usually recommend. Subjective statistical analysis is needed together with studies to determine the effect on optimum weight and cost due to changes in choice of frequency distribution, coefficients of variation, and other parameters (Reference 27).

As part of its program to maintain and develop structural design criteria, the Air Force has sponsored various investigations intended to lead to reliability based criteria for both airplanes and missiles. One investigation (Reference 21) was partially presented in Section IV. This investigation will be further discussed with two others (References 29 and 30). These three investigations emphasized static strength reliability, although fatigue or durability requirements can be incorporated within these concepts. Other Air Force investigations have more thoroughly emphasized the fatigue aspects of a reliability based criteria. Reference 31, for example, treats fatigue design considerations while Reference 32 emphasizes fatigue but also provides limited treatment of static design considerations. Reference 31 is an extension of Reference 32 and Reference 33 is an evaluation of the concepts in Reference 31. These fatigue related references are noted here only for completeness and will not be emphasized further. The three investigations relating primarily to static strength design considerations, however, will be summarized in more detail because of their direct correlation with the factor of safety concept. In expanding these three reliability based efforts, the philosophy of the techniques will be emphasized and not the technical aspects of their development or application.

A statistically based concept developed for missile design is found in Reference 21, Part II. The concept is broad, however, and can be applied to almost any reliability based design problem. The design

concept is basically a framework developed to be consistent with the premise that there is no definite demarcation between safe and unsafe design, but a gradual change in reliability between safe and unsafe. The idea that a sharp change exists between safe and unsafe can cause unnecessary redesign for every slight change in design load or reduction in allowables. Redesign should be required only when the overall reliability of the system decreases appreciably. The term "framework" applies because the wide scope and complexity of the problem did not allow final refinements to be made. This concept, as discussed in Reference 21, is described in the following paragraphs.

This concept uses any number of design variables that are essentially independent of each other to determine interaction envelopes that separate failure from nonfailure regions. Design parameters are presented so that criticality continuously increases as parameter values increase or decrease. By superposition, a single interaction envelope is formed and the probability of not generating points in the failure region is the quantitative reliability of the system for the time period considered. To simplify the computation of reliability (which could be obtained by integrating the content), an equivalent value of each parameter is defined such that the envelope content is approximated by simple multiplication of the probabilities associated with the probability value of each parameter. Any number of statistical parameters can be used. Limits are imposed only by the analysis time and data available. As data is defined, the number of parameters can be optimized and should include five to eight that are random varying and fifteen to thirty that are systematically varying; any distribution can be accommodated without the necessity of having to find a special function of the variable.

The intersections of any two interaction curves are defined as "nodal points," which are used as design points. The analysis is relatively insensitive to the exact interaction envelope shape because any reasonable envelope shape having the same content will pass near the same design points (Figure 15). The design conditions or nodal points are defined by two parameters, one having a limiting value ( $X_{L.V.}$ ) and

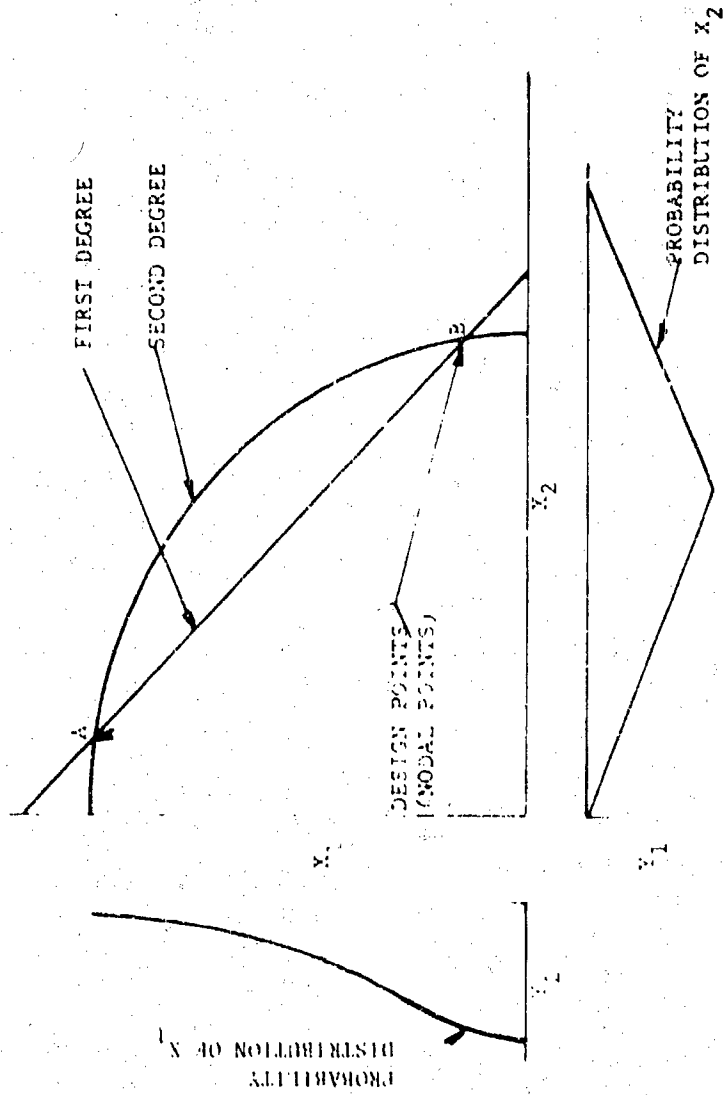


Figure 15. Two Parameter Probability Distributions and Interaction Envelope (Reference 2)

ATTN: IR 388

the other a reference value ( $N_{R,V}$ ). The probability value ( $N_{P,V}$ ) at each point is equal to the limiting value minus a correction factor ( $N_{C,V}$ ) which is approximated by analyzing representative probability distribution shapes of significant parameters (Figure 16). The pictorial representation is limited but a mathematical extension is completely valid and feasible for any number of parameters.

Power spectral techniques are used to evaluate time dependent effects, and other simplified techniques were developed for handling systematic variations. A method for determining the required confidence levels of parameters is also given to assure consistent reliability analysis and accommodations are made for fatigue and creep effects. Greater approximations are allowed for secondary design effects than for primary effects.

The basic concept then is a semi-empirical method for quantitatively determining the reliability of a defined structure or for the design of a structure to a prescribed reliability. The development is based on and justifies two basic premises: (1) that by the judicious selection of design (nodal) points the true interaction envelope shape is unimportant and (2) that the reliability of a system can be calculated with sufficient accuracy by simple multiplication of the probabilities of equivalent parameter probability values rather than by integration of the interaction envelope content. Although seemingly complex when reviewed, the method of Reference 21, Part II, can by using a minimum of parameters and certain refinements and with some additional development and appropriate data, approach the factor of safety method in simplicity.

A different reliability based concept is found in Reference 29. Reference 21 developed a statistically based quantitative structural design criteria that relates the probabilistic nature of design, operational and environmental experiences to structural performance. Reference 29 develops a deterministic structural design criteria that uses a quantitative objective and various statistical techniques as described in the following paragraphs.

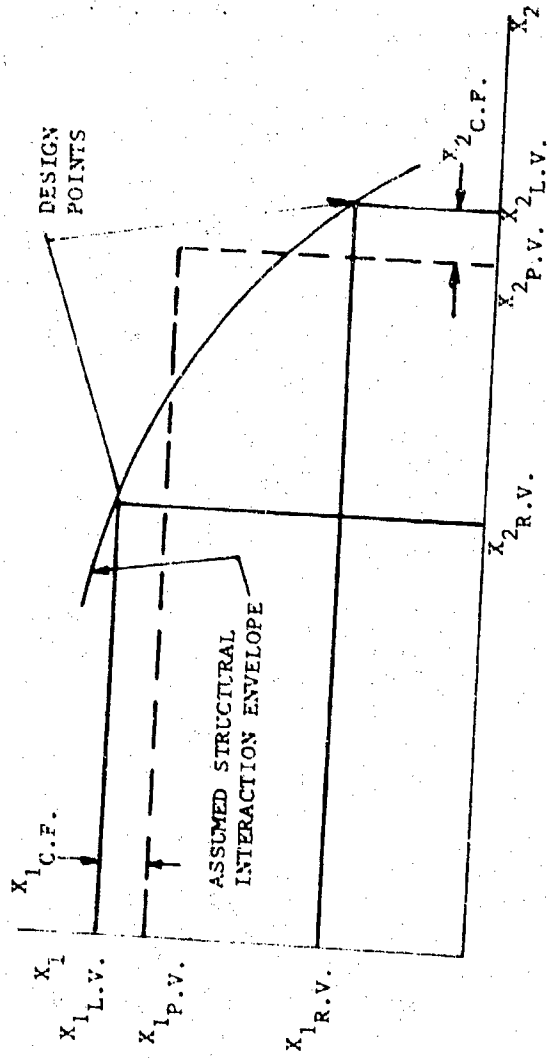


Figure 16. Location of Design Points (Reference 21)

This design method is characterized by the thought that the ability to calculate a probability of failure when load and strength spectra are assumed to be known, is quite different than the ability to determine the true structural reliability of an operational structural system. The method also incorporates certain considerations that appear to be overlooked in other approaches. These oversights are: (1) errors or discrepancies which occur between actual and calculated spectra; (2) the influential effect of testing as a means of design error disclosure; (3) the necessity for demonstrating proof of compliance with requirements; and (4) the necessity for assigning responsibility for actions which affect structural reliability. Other interactions with nonstructural, operational, managerial, and contractual areas are also included.

The overall investigation and proposed design concept evolved in three steps. The first step evaluated the various functions which contribute to structural design. The second step evaluated and compared the current factor of safety concept and a (hypothetical) purely statistical structural reliability concept to the structural performance and design functions established in the first step. The third step evaluated existing and proposed reliability based concepts to the same standards of evaluation used in step two. These evaluations concluded that: (1) the current factor of safety design technique is a satisfactory system but that more stringent future requirements will minimize the effectiveness of the system; (2) a purely statistical structural reliability based system is not practical since there is no way to accurately measure structural reliability and it is not possible to write definitive requirements to demonstrate the reliability (proof of compliance); and (3) that none of the known structural reliability based concepts in the literature today provides a satisfactory foundation for a quantitative structural design criteria based on statistical methods. To elaborate slightly and provide an appreciation for the design concept which evolved, the philosophies which governed the development will be expanded in the following paragraphs.



The fundamental purpose of any structural design effort is to develop an operational structural system that satisfactorily performs its mission. This development is the result of many management and engineering decisions which are a key element in the success or failure of the design effort. One aspect of the factor of safety concept is that the design effort can be practical and easily administered because it has an inherent proof of compliance (test) provision. Its fundamental problem is that it has no clearly identifiable quantitative design objective to satisfy. The available logic cannot resolve the comparative adequacy of different factor of safety values. In some design areas, such as fatigue or high temperatures, the factor of safety is not even directly applicable to the definition of the design requirements. The concept only defines a relationship between limit and ultimate load, which normally controls the design strength level and does not allow for an assessment of its "correctness," other than failure. Positive margins of safety do not prevent failure. Gross errors in design loads, analysis, and large strength scatters contribute to failure at limit load or less. Structural tests, on the other hand, are a nearly perfect disclosure of gross errors if the strength scatter is small, as is customary. The trend toward greater scatter and a lessening or inability to disclose analytical errors requires that the possibility of failures below limit be considered more seriously in the future. Further, test conditions are normally selected on the basis of the strength analysis and the actual design conditions are becoming more difficult to simulate when testing. Successful ground tests, therefore, do not guarantee successful operational performance and flight testing will remain an important design development consideration regardless of the design concept used.

Current requirements have evolved primarily as a reaction to past problems and the assumption that future structural systems will have the same characteristics as past systems is not necessarily valid. When structural failures do occur, the deterministic nature of the factor of safety concept allows the determination of the cause, the responsibility, and the corrective action to be taken. Unfortunately, because of the many interactions between the structure and other design areas which

contribute to structural integrity, responsibility is not always recognized until after a failure has occurred, as the result of a design oversight. These and other considerations previously noted relate primarily to the factor of safety concept but they also interact with reliability based concepts. Especially important are the considerations that establish design compliance and responsibility when failure occurs. When cause and responsibility are not determinable, neither is the corrective action.

The structural design concept that evolved in Reference 29 utilized the desirable features of the factor of safety concept and improved or replaced those not desirable. The following basic characteristics are included in the concept:

1. The deterministic type of requirements that give the factor of safety concept its practicality and administrability are retained.
2. A clearly identifiable objective that serves as a basis for judging any proposed modification to the factor of safety concept is established.
3. A structural reliability goal is part of the objective. The goal is not a requirement since structural reliability, per se, cannot be determined accurately enough to serve as a contractual requirement.
4. The techniques to convert the structural reliability goal into deterministic requirements based on statistical considerations are developed.
5. The capability to deal with structural systems having large strength scatters is incorporated.
6. Specific problems such as fatigue and high temperature design can be integrated into the structural design to attain the defined objective.

7. The crucial interfaces with nonstructural design requirements are identified. Provisions are made for assigning responsibility for every function that affects structural integrity.

8. The concept of testing as a disclosure of error in formulating design requirements is utilized.

Basically, the structure should have a capability to survive designated overload and understrength situations caused by undetected errors or oversights. The factor of safety concept provides this capability but the provision is indirectly and inconsistently applied. Structures with large strength scatters are basically more prone to fail from understrength considerations rather than from overloading. The concept in Reference 29 establishes separate and distinct requirements for understrength and overload situations. The requirements are based on probabilities and statistics and are selected to be consistent with a level of structural reliability appropriate to the airplane's mission. The design and mission relationships are illustrated in Figure 17. The central bar indicates that the limit design load includes a provision to handle an understrength structure to avoid failure at limit load. The right or left bar indicates the overload provision. The left bar illustrates a large overload provision and overrides the understrength provision. This could represent a relatively low reliability, high load factor fighter airplane. The right bar illustrates a design situation with a smaller overload requirement. The understrength provision is now more critical and governs the design. This could represent a design requirement for a highly reliable, low load factor transport airplane. Once the appropriate design values are chosen, they become deterministic and are as easy to administer as the conventional factor of safety concept.

The first implementing step is to select a structural reliability goal consistent with the mission. The goal is not a requirement and suggested values are given in References 29 and 30. The limit and ultimate design conditions are two separate conditions based on the reliability goal and established by statistical or qualitative

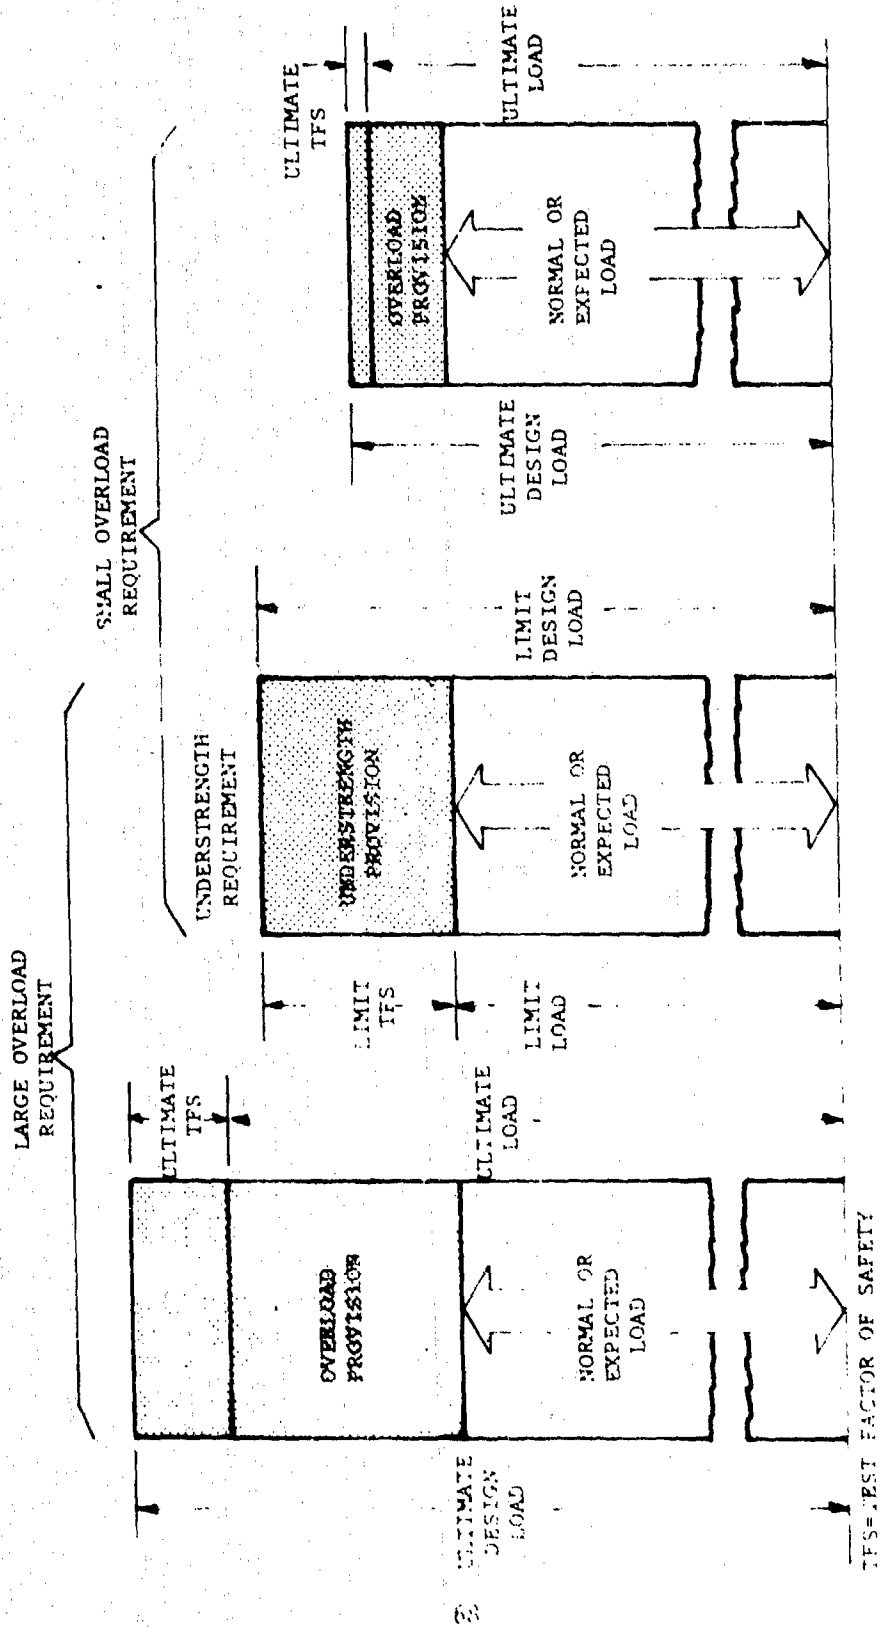


Figure 17 Overload and Understrength Requirements (reference 29)

considerations, which reflect available experience. The design limit condition is the upper bound of a normal or expected (permissible) operating condition while the ultimate condition is an abnormal operational condition reached only as the result of an operational error or failure of a nonstructural system. Failures within the understrength design provision are a structural responsibility and require correction, while failures from overloads require operational corrections. There is no fixed factor of safety separating the limit and ultimate condition; the ultimate condition in Reference 29 does not represent the conventional meaning of ultimate load. The condition is separate and unrelated to the limit condition, whose meaning does not change. The ultimate condition is a design condition based on a rare or abnormal situation and may be significantly different from the conventional ultimate load.

The basic structural design is qualified and approved by conventional ground and flight tests. Ground test loads are defined by a limit or an ultimate test factor of safety. The factor selected varies according to the established structural reliability goal and by the number of tests conducted. Example values are shown in Figures 18 and 19. Flight tests are conducted in a conventional manner and operational flight load monitoring are required to verify operational consistency with design. If not consistent, the structure would require modification when operations are detrimental or the operational procedures may require some change.

There are many ramifications, qualifications, advantages, and disadvantages related to reliability based design concepts as expressed in Reference 29. Most of the associated disadvantages or problems are not new but have always been problems, such as the statistical definition of design data. No new problems are created by introducing reliability based concepts but old problems become more clearly defined. The basic advantage of the proposed concept in Reference 29 is its ability to establish structural performance in terms of a quantitatively definable goal. This permits the definition of the minimum structural requirements to meet the goal. It also permits the justification of a less severe structural design criterion when warranted. Because each of the design

$$\text{Limit Design Load} = \text{Limit Test Load} = \text{Limit Load} \times \text{Limit TFS}$$

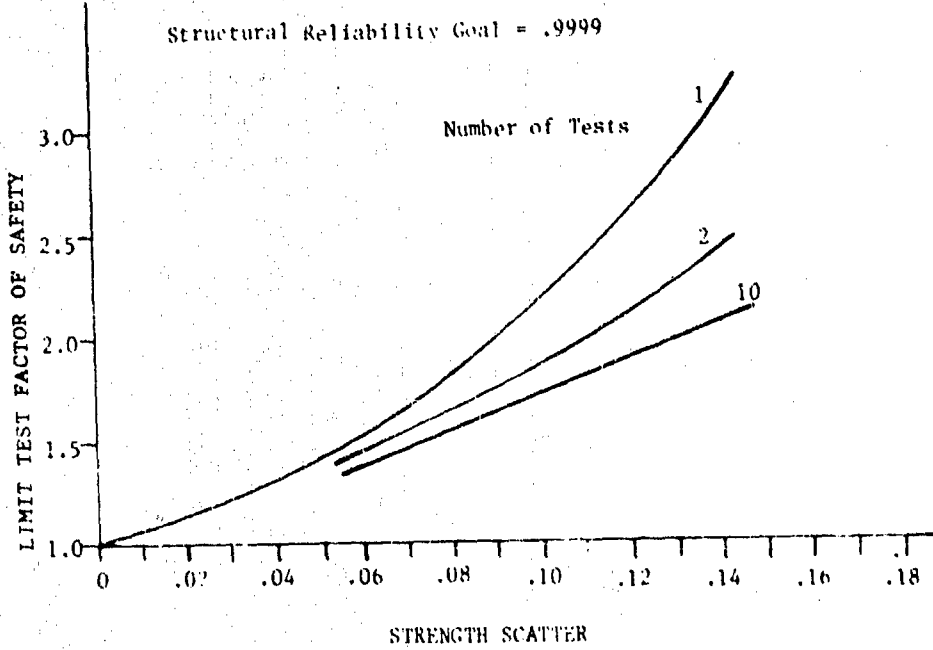
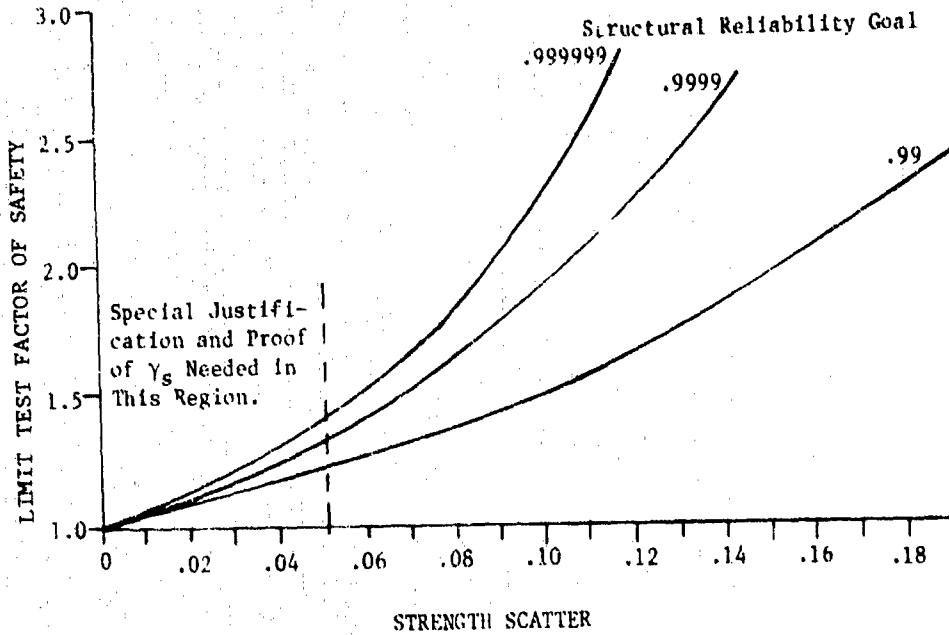


Figure 18. Limit Design and Test Factor of Safety for a Given Structural Reliability Goal Versus Strength Scatter (Reference 79)

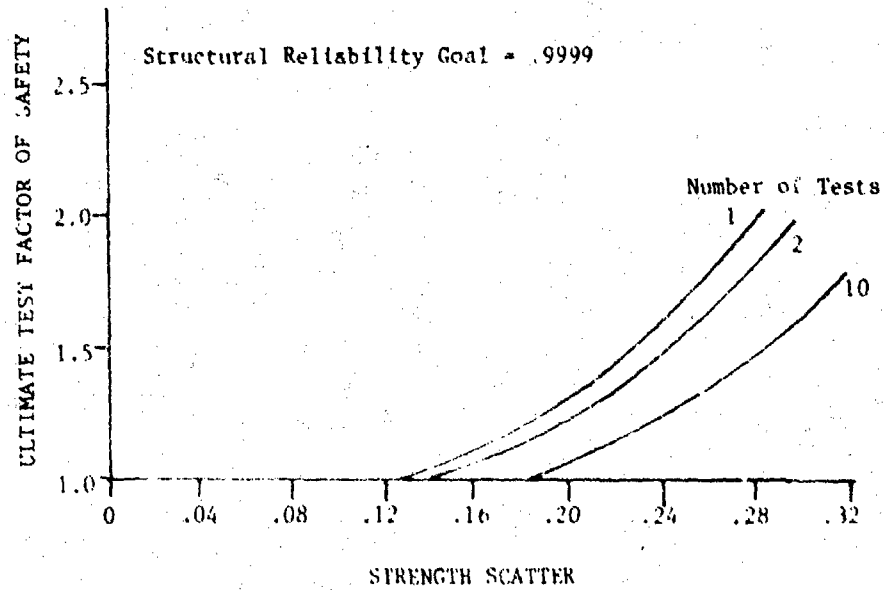
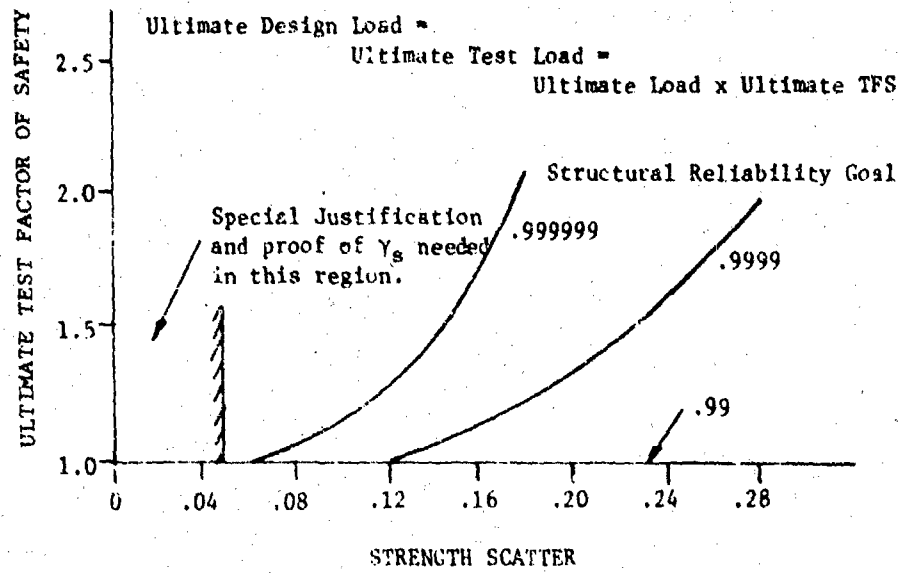


Figure 19. Ultimate Design and Test Factor of Safety for a Given Structural Reliability Goal Versus Strength Scatter (Reference 29)

aspects is quantitized, trade-offs can be made between criteria reductions and the difficulty (technical, cost, time) of providing more efficient structural characteristics.

The proposed reliability based concept in Reference 29 is reviewed in Reference 30 to identify data requirements, necessary changes to design specifications and handbooks, interactions with nonstructural design areas and the steps required to implement the concept. To illustrate each step of the concept, Reference 30 uses several design examples. First, simplified dummy data is employed and then realistic data. The categories of required data are defined further by a study of data pertinent to the C-141 cargo airplane and then by a trial application of the concept to its wing. The revision of data to reflect an improved state of knowledge at each design stage and during the life of the vehicle, and the form in which the required data might be standardized, is also discussed. Although the limited study did not allow an extensive treatment of data requirements, Reference 30 provides insight to the complexities of the data problem as it relates to reliability based design and similar concepts. The data requirements, limitations, and design interactions are presented in the following paragraphs.

To be effective, data must be established and updated continuously. Fundamental data are operational load spectra, error functions, and strength distributions. These data will change periodically during the total lifetime of a specific airplane. The particular periods that permit progressive updating are the initial, detail, and final design phase, before and after tests, and before and during airplane operations. It is through the airplanes operation that quantities of new data can be obtained; the data are also pertinent to other design concepts.

In June 1954, a special panel report (Reference 34) of the NACA Subcommittee on Aircraft Loads recommended a program to obtain statistical information on maneuvers and related inflight loads, whether caused by pilot indocement or atmospheric turbulence. The panel also recommended that the Air force and Navy obtain time histories of three



linear and three angular accelerations about mutually perpendicular axes, airspeed, and altitude to establish a statistical design base. The recommended statistical maneuver load program was initiated as a joint effort by the Air Force, Navy and the NASA in 1956.

In 1958 the Air Force outlined a long term program to collect and utilize flight measured data. The program, initiated in 1959, was to develop techniques for integrating the statistical data into existing design criteria, review and improve the data recording and reduction, and to establish fundamental requirements for structural criteria based on statistical methods. The resulting effort identified certain problems which were grouped into three categories: the definition of design conditions, the definition of component strength distributions, and mathematical procedures relating the first two to structural reliability. The program also led to the sizing and establishment of a data reduction facility by the Navy and an 8-channel recorder development program by the Air Force. State of the art limitations eventually terminated the recorder development program and in turn closed the data reduction facility in 1969. References 35 and 36 are documents relating to this effort. Other investigations which have defined data requirements and collection programs for missiles are described in References 16, 24, 37, 38, 39, 40 and 41.

More recently, the operational data recording program for airplanes has continued as the Air Force's Aircraft Structural Integrity Program (ASIP), as defined in Military Standard 1530A, by the same title, dated 11 December 1975. As part of the ASIP, each airplane system will be monitored to obtain time history records. The parameters necessary to monitor operational usage and derive stress spectra for critical structural areas will be measured in approximately 20 percent of the operational force.

To accomplish the ASIP, the Air Force initiated plans in 1968 to develop a new and more universal multichannel recording system to less stringent standards than the previous 8-channel recorder. New requirements

were prepared and in June 1970 the development of a 24-channel digital recording system and a ground playback unit were started. The system has been developed and is now in limited use. The data tapes for each system will be collected and compiled at a single location when the program is fully implemented. The parameters measured and sample rates can be varied to the specific needs of each system. Figure 20 is typical of the data to be collected. Plans to establish the necessary parameter correlations and design load spectra from the ASIP data are being formulated.

The major objective and justification for the multichannel program is to provide a better tool to accomplish fatigue tracking. However, because of the high commonality between data needed for fatigue and statistically based strength design, the reliability based design concepts will also benefit. When a recorder program on a certain system matures to the point that statistical stability is obtained and no new operational fatigue related information is produced, or when certain parameters attain statistical stability and need not be recorded full time, the resulting surplus of recorder capacity can be used to establish statistical strength criteria or to fill knowledge gaps; for example, the phasing of power spectral density (PSD) loads. In past analysis, current PSD methods allow a fairly precise, but separate, determination of shear, bending, and torsion at a given location; the phasing of the three vectors is largely a guess. The addition of strain gage clusters or rosettes at selected locations could provide actual examples of the amplitude and frequency relationships. Such data will be essential in future designs to express applied loads and structural strength in a common set of terms.

Ideally, derived data can be standardized and categorized. A convenient approach would be provided by charts relating the required design and test factors to the reliability levels in terms of parameters describing the load strength distributions, the error function, and the number and type of tests. Theoretically, it would appear possible to develop a single load spectrum for each location, which would contain

## AFFDL-TR-78-8

NO.	ITEM	NAME
1.	T	Clock Time
2.	H <sub>P</sub>	Pressure Altitude
3.	V <sub>e</sub>	Equivalent Airspeed
4.	N <sub>Z</sub>	Normal Acceleration at C.G., g's
5.	N <sub>Z</sub>	Lateral Acceleration at C.G., g's
6.	$\dot{\theta}$	Pitch Rate
7.	$\dot{\psi}$	Yaw Rate
8.	$\delta_e$	Elevator Position
9.	$\delta_r$	Rudder Position
10.	$\delta_f$	Flap Position
11.	V <sub>R</sub>	Ground Speed
12.	$\beta_N$	Nose Gear Steering Angle
13.	$\sigma_1$	Strain at Location 1
14.	$\sigma_2$	Strain at Location 2
15.	$\sigma_3$	Strain at Location 3
16.	$\sigma_4$	Strain at Location 4
17.	$\sigma_5$	Strain at Location 5
18.	AP	Cabin Pressure Differential
19.	W <sub>1</sub>	Total Weight of Fuel
20.	S.S.	Squat Switch Make-or-Break Signal
21.	DD1	Date
22.	DD2	Serial Number
23.	DD3	Base of Assignment
24.	DD4	Initial Cargo Weight or Cargo Update
25.	DD5	Total Fuel Weight

Figure 20. Proposed List of Multichannel Recorder Parameters for the C-141 Airplane (Reference 30)

the total load occurrences for an airplane lifetime. However, the simultaneous consideration of both limit (normal) and ultimate (abnormal) loading conditions will seldom be possible because the permissible strength level will generally be different. Each structural location will require separate analysis, since both load and strength distribution will differ from point to point.

The statistics available, even on airplanes which have extensive operational experience, are not adequate. For example, additional information is required on the probabilities of: (1) weight and weight distribution; (2) speed and altitude; (3) types of load conditions (gust, pull-up, rudder kick, etc.); (4) level of loading (in terms of a basic parameter); (5) time history of loading (to describe local loading); (6) associated load systems (pressure, thermal gradient, etc.). These probabilities are not independent and the resultant probability of each combination is also needed. In addition to the average or typical conditions defining each segment of the mission profile, it is necessary to derive or assume the shape and distribution about the mean. Without this detailed level of data, no realistic estimate of the risk of failure can be made.

Although extensive material strength data exist, the allowables represent only one discrete point in the distribution. The form of data required consists of the mean and standard deviation and the shape of the distribution to be used. The structural strength of the final component will also reflect the variations imposed by all of the inherent operations in fabrication and assembly. Data on the strength of various structural configurations exists only in a random manner and usually in insufficient quantity to provide adequate statistical distributions.

It is frequently necessary to assume that all observations are of a single homogeneous population whose distribution follows a standard form. Such assumptions often give good fits near the most frequently occurring values but for the structural reliability problem other factors require emphasis. The major difference between structural and common reliability

analysis is that the mean time to failure is not a desirable measure of reliability. It is the risk of failure that is required for a structure. There is no acceptable failure rate and much more emphasis is therefore placed on high (abnormal) loads and unusually low strengths. This emphasis, then, requires that the statistical representations match the appropriate tails of the distributions rather than the region near the more frequently occurring values.

The formal recognition of possible errors is probably more important than the specific definition of an error function. The error function may describe any number of discrepancies, however caused, in terms of the distribution of the probable mean strength of the structure. A number of suitable functions are available for initial design use. The degree of dispersion (coefficient of variation) has relatively little influence once the test results have been incorporated, when tests are used as an error disclosure. A relatively low risk would probably be introduced by the adoption of a standard error function.

The implementation of an reliability based technique will present certain problems and Reference 30 suggests a two stage process. Initially, there will be insufficient data available to implement a total reliability based design concept and emphasis should be placed on the comparative similarities with the existing factor of safety design concept rather than the differences. However, even restricting the reliability concept to design conditions for which data is available will help establish a correct understanding of the probabilistic processes and encourage the acquisition of the data required for further implementation.

The first phase would apply the reliability concept to selected design conditions and primarily emphasize familiarity with terminology and mathematical relationships; the relative importance of parameters; evaluating the implied reliabilities of existing airplanes; and insuring that continuity with existing design concepts exists so that no abrupt changes in structural integrity will exist. The interactions between

AFFDL-TR-78-8

static strength, fail-safe strength, fatigue strength and damage tolerance strength also require identification to permit the whole spectrum of structural reliability to be expressed in a consistent manner.

The second or final stage, that of achieving a meaningful, completely probabilistic concept will not be possible until quantities of additional statistical data are obtained, especially for asymmetric flight cases and combinations of parameters which are not independent. Not only must every possible cause of loading be established in probabilistic terms but every factor affecting the strength must be established. Unless a total picture is assembled, nothing will be known about the relative importance of the various design conditions and interactions, about ways of changing the reliability results by modifying the operating conditions, or by redesign of the structure. When reliability results are further specified as a single numerical value, even when specified as a goal, the relative merit of different values regarding safety and possible redesign must be considered. The concept of a single numerical value for the reliability of an airframe or even a specific location on the airframe is superficially attractive, but any real advantage is completely offset by problems of interpretation of the number. Any judgement as to acceptability of one reliability number over another that is slightly different will remain arbitrary. It is probable that a relative risk assessment technique will prove to be worth while even when all of the necessary statistical data are available and a completely probabilistic design concept can be achieved. Final implementation will be governed by experiences gained during the first phase and the availability of design data.

The next section will attempt to place these thoughts and ideas, and those of previous sections, into perspective by further relating them to current design practice.

## SECTION VI

## CONCEPT INTERACTIONS

The factor of safety has lost some of its appeal in recent years and probability analysis has been emphasized as a more rational concept. Formerly, the complexity of reliability based concepts centered around the analytical aspects of the solutions but this difficulty has been offset by current computer technology. Today the prime restraint is available design data in the proper statistical form (Reference 21).

Dissatisfaction with the factor of safety concept became more apparent during the early 1960's when surveys of airplane and missile manufacturers were conducted in conjunction with various Air Force structural design criteria development programs. The general industry feeling that the factor of safety is growing more and more inadequate has apparently not changed. The initial dissatisfaction applied primarily to missiles, but airplanes were not excluded. The surveys also found that the degree of availability of flight measured data varies greatly between systems. Its quality and quantity are both deficient and the parameters most needed for reliability based design concepts are often not measured. Cost and the inability to access a system for the purposes of instrumentation and data measurement often become insurmountable problems.

Whether using a factor of safety or a reliability based concept, the airframe's probability of failure will be sensitive to the number of significant design parameters (assuming all significant parameters are accounted for) and their statistical distribution. The design data must encompass all of the natural environments, induced environments, operational variations, material properties, and built-up structural properties; the total number of specific parameters requiring statistical definition becomes significantly large. The state of the art and practical limitations in establishing accurate statistical data for each significant parameter is such that the actual results may be more academic than related to actual needs. Unless the available data are carefully selected and reduced, considerable effort could be expended with few commensurate results.

Although the validity of extrapolating data for design use is taken for granted certain precautions must be exercised. Too often design data have been compiled from inappropriate or limited samples. Data must reflect operational conditions from all segments of the Air Force; pilots must be qualified or typical, not highly experienced flight test pilots; weather conditions must be proportioned between good and bad flying conditions, and daylight and night operations; and weather cycles occurring during the year and over a period of years must be considered. Some parameters have physical limits or practical upper limits and any assumed distribution must consider a reasonable cut-off value. Extreme values become less accurate as they progress away from the mean and influence design confidence. Values selected closer to the mean could affect flight safety. As a logical extension of the realization that all airplanes of a certain type cannot (statistically) meet the design economic or fatigue life expectancy, there is a trend to develop exceedance curves for design that represent average rather than extreme environments. Formerly, airplanes were always designed to the maximum expected or extreme environments for both static and fatigue strength and the static loads induced were increased by the factor of safety. The effect of this design trend on flight safety cannot be assessed but the importance of selecting proper design parameters and having a factual data base increases.

The limitations which inhibit induced load measurements have led some to believe that the factor of safety should be retained on loads but that all other design considerations (which are assumed to be well-defined) should be evaluated by a rational statistical analysis. These concepts might lead to a refinement of current design procedures but do not change the procedures since statistical considerations have long been a part of airplane and missile design criteria. Although probability factors for structural design are seldom expressed in current criteria, the choice of limit load factors for static and fatigue strength and various environmental design parameters are fundamentally based on flight and environmental statistics (Reference 23).



Perhaps the most important contribution to airframe safety is that of testing. As so aptly noted in Reference 42, "safety regulations, however good and sophisticated, should always provide for approval based upon relevant experiment, such as the measurement or control of actual loads, the measurement of the actual strength of components, and the demonstration of the performance of the complete structure by proof or stiffness tests." This practice has long been the custom of the aeronautical engineer. Both ground and flight tests are used to demonstrate design integrity and optimize the conflicting requirements of minimum weight and maximum structural reliability. Optimization and economic airframe life requirements have in recent years placed considerable emphasis on developmental testing. This emphasis will probably increase in future years. Although testing is a very cost effective design and substantiation tool, the expense of testing is a major obstacle to obtaining more appropriate statistical data for reliability based design concepts and statistical substantiation of structural reliability. Some of the interacting roles of structural analysis and testing are discussed in Reference 43.

A natural extension to current practice is the use of additional factors and design parameters. This concept is less complex and easier to manage in a rapidly changing design environment than using a variable factor of safety. The modified factor of safety concept (Reference 21) factors three performance variables and it could be expanded to include others. Going further, Reference 38 suggested that the factor of safety on loads for missiles could be reduced in certain instances when a particular load source is highly predictable, thrust for example. However, Reference 16 expressed the view that although some design load sources are highly predictable, the combined design load may be exceeded for some design conditions when components of the combined load are reduced. In effect, known conservatism compensate for the unknown.

The additional design complexity imposed by a new or revised concept on structural analysis must also be considered. Associating a specific factor with a specific variable, regardless of the number of factored variables, will provide a certain level of additional complexity to a load/stress analysis; using a variable factor of safety and specific parameters will add a different level of complexity. Computerized analysis techniques can relieve some of the

bookkeeping, but considerable additional judgement in design is required as compared to using a single factor of safety on load. Although less complex, the single factor of safety on loads will not satisfy the objective to control structural reliability; the single factor is a function of numerous variables which can vary structural reliability appreciably and not impose a change on the factor itself. Also, if new factors of safety are applied to additional design parameters or if revised or variable factors are applied to loads, the years-of experience and backlog of compensating design limitations and related requirements which we have for the conventional factor of safety will be lacking and design confidence will decrease until a new base can be established.

Major changes in airframe design technology are usually accompanied by a comparison with existing techniques prior to adoption. Reference 30 illustrates a limited comparison of this type as discussed in Section V. Other studies have made comparisons relating equivalent factors of safety to a compatible reliability. Such comparisons can be found in References 28, 44, 45, and 46. There is a similarity between reliability and factor of safety concepts which becomes more obvious when the factor of safety is viewed as a concept based on the statistical definitions of many basic design parameters. Each design parameter, however, is normally reduced to a specific value and the concept becomes deterministic rather than probabilistic. To further the analogy, the design (ultimate) and operational (limit) stresses can each be assumed linear and represented by a frequency distribution. The ratio of the mean stresses of each assumed distribution can then be defined as a factor of safety. Reference 44 uses this analogy to show that the level of reliability can vary widely for the same factor of safety value. As proportional changes are made to the stress ratio or to the shape of the distributions, the overlap of the tails of the distributions varies and, in turn, the reliability varies. A fixed factor of safety cannot, therefore, ensure a constant level of reliability without considering the statistics of the design strength and operational stresses. Reference 44 further explains that the factor of safety can be placed on a more rational basis and, in fact, only has meaning when related to the concept of reliability.

The degree of safety desired or required also varies according to the particular point in the V-G diagram which is involved. The left hand corners of the diagram represent maximum lift coefficient and the maximum load possible (not considering the small increase in maximum lift coefficients that can occur under dynamic conditions and which may be used in constructing the diagram). Thus, if a static test has been conducted satisfactorily and validated by flight measured loads, it would be physically impossible to have a static structural failure at these points when operating normally. A similar statement may be made of the flight controls, which are limited in loading to specific boost capacities, and in a more general sense, to inlets which are designed to specified pressures corresponding to maximum speeds at which the airplane will fly. The airplane may physically exceed the design speed and maneuver limits, but it has turned out in practice that pilots have kept the aircraft within speed and maneuver limits without difficulty. In these cases, it might be logical to consider a lower factor of safety than that considered for the right hand corners of the V-G diagram (Reference 25).

Exceptions to normally controlled flight conditions are instabilities which cause design load factors to be exceeded. The factor of safety does not recognize aerodynamic instabilities in design. Even with an extensive operational background, past experiences show that all static flight failures cannot be predicted. Several late 1950's airplanes have been lost because of unaccounted for aeroelastic effects. Some losses were the result of aerodynamic interactions and one resulted from improperly predicted spanwise wing loads. Some structural failures could have been prevented within the state of the art but others have resulted from new phenomena not anticipated or a subsequent wind to a prior turbulence upset (Reference 25).

More recent examples of structural failure can be cited for both fighter and transport airplanes. These examples resulted from control system malfunction. In some flight structural failures subsequently occurred to the wings of the airplanes. Spars were cracked and major thick-skin wing planks became detached but the instabilities were eventually overcome. If these structures had been designed to a lower factor of safety or to a design load

concept having an effective factor of safety lower than 1.5, these airplanes would probably have failed catastrophically in flight. This failure projection is hypothetical, but these real examples of structural overload reflect the inherent conservatism in today's airframe and the need for overload protection. It is unlikely that the dollar value associated with the cost of the airplane and crew training, for any one of the several airplanes affected, could be offset by the savings in weight, the performance gained, or operational costs saved by using a design concept that might provide a lower level of structural safety.

There is another measure of safety to be accounted for beyond the normal overload/understrength probability limits of structural failure. Extraneous causes of structural failure may arise which are not part of an original design evaluation. Instances of poor maintenance, improper assembly or reassembly, substitution of improperly heat treated components, etc., are well known. Other phenomena such as hydrogen embrittlement and stress corrosion may not be adaptable to statistical design procedures and the statistical limitations of small coupon or structural component tests are also well known. Even if these events can be statistically accounted for, their significance could overshadow the probability of normal structural failure when considering reliability based criteria (Reference 25).

There is still another safety aspect to consider. The factor of safety does interact with other design and analysis requirements, although it is often viewed as an independent measure of structural safety. Reference 47 is a study of comparisons between existing and proposed civil engineering requirements that emphasize a similar interaction. The study first notes the many uncertainties in design and construction that are covered by providing overload protection. The facets noted are identical in context to those considered within the factor of safety concept for airframe design. Similarly, the factor of safety concept is noted to be a crude method of covering analytical and construction errors, but the reference also notes that it has the merit of simplicity. The study evaluated a variety of structures exposed to three loading conditions. It compared the quantity of flexural steel required for each design case and assessed the theoretical overload capacities

of the structures. The steel requirements using both the old and new requirements were found to be very similar for each loading condition but the presumed overload protection was found to vary. It was initially presumed and implied in the specifications that the theoretical overload protection would be proportional to the factor of safety associated with each load system. However, the strength was not proportional to the factors of safety used. This occurred because the design of the adjacent spans in the structure used different factors depending on how they were loaded; in some cases, the loaded spans were counterbalanced by an exaggerated (factored) dead load on the adjacent unloaded spans. The overload capacity of the loaded spans was not directly proportional to the factor of safety.

Even though the study showed a variation in overload capacity, existing structures designed to these requirements were still considered safe for several reasons: Occurrences of actual overload were negligible, the probability of understrength was low, and inevitable detailing excesses (design conservatism) existed. One additional reason, however, is most important and relates to the elastic analysis. Until recently, the complexity of the elastic analysis encouraged the use of simplified assumptions which required up to 70 percent more steel than would have been required by a more rigorous analysis. The additional material, in turn, greatly increased the overload capacity of the structure and led Reference 47 to conclude with this question: "With the increasing use of computers, which make more rigorous analysis, --- will structures designed according to --- (existing requirements) --- or similar types of load system(s) still be adequately safe?" This question is equally applicable to the 1.5 factor of safety design concept for airplanes.

The following are similar points emphasized in Reference 29. The main point emphasized is that the conventional factor of safety provides for (unknown) situations that might not be recognized in a more sophisticated (rational) design procedure. Any attempt to be too sophisticated can also lead to design procedures that are impractical. To avoid these possible problems, new and old concepts should be closely compared. Any large differences

in the results should be viewed with caution and not be accepted uncritically. It is further noted that different results, either more or less critical, are not necessarily adverse and can often be justified under appropriate circumstances.

The concluding question in Reference 47 should also be expanded to reliability based concepts: If more complex reliability based design concepts are eventually implemented to rationalize existing requirements, save airframe weight and improve performance, will the new structures still be adequately safe? There is no immediate answer available. Hopefully, any change in design concept will bring with it an adequate and equivalent level of airframe safety; however, any design concept is a balance of requirements involving numerous parameters and design interactions and any new concept for which experience is limited must be thoroughly evaluated and closely monitored to ascertain the true affect of the change on structural safety.

Generally, reliability based concepts are not proposed to improve flight safety. Flight safety is always a concern and new design concepts are generally not adopted until an equivalent or better level of safety is assured. The most significant reason normally given for adopting a new concept is to achieve a reduction in weight when compared to the accepted norm. This reason is well intended but could also be misleading. The accepted norm can be elusive and difficult to define and the projected savings in structural weight can be easily overstated. Every design concept attempts to maximize efficiency and avoid either an unconservative or an overweight structure. In this respect, current design practice has been very effective. Reference 19 provides some insight to the history of structural efficiency for bomber and transport airplanes up to 1964. The observation is that airplane weight trends and structural weight fractions are very consistent. It makes no difference whether an airplane is jet powered or propeller driven, whether it was built 25 years ago or is of recent (1964) vintage. There remains a balance between an efficient structure and/or material and the design requirements imposed on them. Studies of future airplanes (beyond 1964) also supported this trend (which still seems valid today). It is apparent that if more efficient materials and types of

construction are found, that more stringent operational requirements will be imposed on them. Time and state of the art advances seemingly have little effect on basic structural weight trends. Reference 19 describes the weight trend curves as basic, and as such, a technological breakthrough would be required to significantly change them.

The trends, of course, are based on the conventional factor of safety design and metallic materials; any improvement in structural weight trends that might result from the use of a reliability based design concept or from composite materials when used on an actual airplane is unknown. These concepts may provide the necessary breakthrough. However, an airplane design is the result of many compromises and interactions which have a neutralizing influence on overall design with respect to any one parameter. Too often weight and performance improvements are estimated superficially and the optimistic conclusions are not achievable. A thorough study that incorporates the major performance and airframe parameter interactions in a design evaluation is required to obtain a confident weight impact assessment and many design variations would be required to establish a new trend. The pacing influence on performance improvements to date have come from advances in propulsion concepts, not structural concepts. Structural designs have successfully kept pace, however, and structural efficiency has improved. But as pointed out in Reference 19, when greater structural efficiency is achieved, greater demands are made and the structural weight fraction has not changed appreciably.

The actual impact of design data, analysis, weight, and test interactions on the development and application of future reliability based concepts cannot be clearly defined at this time. The similarities between the factor of safety and probabilistic techniques indicate that any state of the art improvements intended to benefit the implementation of a probabilistic concept would also benefit and improve the factor of safety concept. This is especially evident when considering a design data base and may be an additional point to consider when evaluating changes in current design concepts.

AFFDL-TR-78-8

There appears to be a slightly subdued, but continuing interest within the aerospace industry to develop a design concept that corrects the deficiencies associated with the factor of safety concept. It has been assumed that any lack of clarity in the merit, goals, or direction that might be associated with a reliability based concept will be resolved satisfactorily as the concept is implemented.

The remaining section will briefly summarize the salient traits of the concepts reviewed and project a possible balance in their future application.



SECTION VII

CONCLUSIONS

To have emphasized only structural design concepts with respect to flight safety is in keeping with the intended scope of this review, but emphasizing too limited a view could be misleading and detract from other important safety aspects. Safety considerations in a broader view are discussed in References 48 and 49 and serve as a reminder of the overall scope of the safety problem. Safety is a total operational system and all aspects must be considered in unison.

The static strength safety aspects of the airframe have been controlled primarily by the 1.5 factor of safety. To be more precise, the factor of safety has been the most visible design aspect of airframe safety and it serves as a unit of measure in that regard. It provides protection to occupants from both understrength airframes and inadvertent overloads. But the overall concept of safety must again be emphasized and not just the factor of safety; the factor does not function alone but in concert with many other structural design and operational requirements.

The 1.5 factor of safety in U.S. design practice is fundamental and represents a level of design safety which has become an accepted standard. Although the concept is accepted and used without reservation, it has remained in an intermittent state of review. Its efficiency as a design concept has been challenged and the objectives of its design application cannot be clearly identified. There are proponents who have encouraged change and proponents for the status quo. To define the arguments and differences between them is sometimes difficult.

Perhaps the 1.5 factor of safety is rational and does not require revision. Or perhaps the 1.5 factor of safety is arbitrary and its basic function cannot be defined sufficiently to establish a revised value. Its history seems to say that the 1.5 factor of safety is a mixture of both elements. The 1.5 factor is rational because it is

based on what were considered to be representative ratios of design to operating maneuver load factors experienced during the 1920s and 1930s (which have not appreciably changed today) and it is arbitrary because we still do not know the exact design, manufacturing, and operating intricacies and variations it protects against, or how to quantify them. Neither can the degree of in-flight safety provided by the 1.5 factor be quantified but its successful history cannot be lightly dismissed.

Reliability and realism seem to go together. Probabilistic design concepts are considered more realistic and have been proposed as being more rational than the factor of safety. Reliability based concepts have, therefore, been proposed to replace the factor of safety concept. Because of anticipated implementation delays, interim design techniques have been proposed and consist of multiple factors of safety which are related to specific design parameters and variable factors of safety which are related to specific design needs.

The primary justification and final objective of the probabilistic concept is to improve airplane performance and reduce operating costs. These improvements are to be gained through reduced airframe weight. However, recent airplane weight studies and past weight trends have shown that the actual airplane weight saved is often less than anticipated. Durability, fatigue life, and damage tolerance requirements also influence airframe weight and tend to supersede savings gained through improved design techniques. These requirements add weight beyond that needed for static strength.

There are many design, operational, and possible legal ramifications to be defined before the factor of safety concept can be formally changed with assured justification. The lack of appropriate statistical data, the need for procedures to establish the true structural reliability of a design and to demonstrate contractual requirements will also hinder implementation of a reliability based design concept.

Reliability based concepts are difficult to define and understand in summary form because of their complexity, but regardless of the advantages or disadvantages alluded to herein the concepts cannot be lightly discarded. They must be examined critically and objectively, simultaneously defining the needed design parameters. Yet, a completely rigorous reliability based concept may be so impractical for structural design that it may be less desirable than the easily administered and less rigorous factor of safety concept. In time, the application of reliability based concepts to airframe design will increase but the degree of their application may have a definite limit. Future concepts will probably evolve to incorporate both a simplification of the purely statistical reliability based concept and the gross simplicity of the factor of safety concept. The factor of safety still covers many contingencies and at this time it appears there will be a need for some factor, and to a greater degree than is sometimes implied (References 21 and 25).

The objective has not been to support or minimize a particular structural design concept but to underscore certain points seldom emphasized. All of the disadvantages noted apply to both the factor of safety and reliability based concepts. The point is, that the reliability based concept will not eliminate all of the problems of the factor of safety concept or necessarily offer a safer design. In fact, the problems may tend to increase because of limited design experience with statistical concepts and the use of statistically defined parameters that may be of questionable validity. Furthermore, there may be an unjustified confidence in computed reliability estimates although reliability based design concepts have been assumed to be more rational than factor of safety concepts. The physical results of a reliability based design and the related statistical data must be more than a mathematical nicety; the statistical confidence expressed in the design must be realizable, in fact. Finally, regardless of the design concept adopted for future use, the safety of the airframe will depend not only on that concept but on the adequacy of the total structural design criteria and the ability of the concept to meet the proof of compliance requirements of the design specifications (Reference 25).

## REFERENCES

1. Niles, A.S., Jr., Airplane Design, Engineering Division, U.S. Army Air Services, Dayton, Ohio, July 1926.
2. Military History:
  - a. Epstein, A., "Another Historical Note on the 1.5 Factor of Safety," Readers' Forum, Journal of the Aerospace Sciences, Vol. 29, No. 6, June 1962.
  - b. Epstein, A., "Horizontal and Vertical Tail Loads on Large Transport Aircraft," Second Structural Loads Workshop for Preliminary Aerospace Design Projects, Deputy for Development Planning, Aeronautical Systems Division, WPAFB, Ohio, 24-25 September 1969.
  - c. Epstein, A., "Some Historical Notes on Criteria," Fifth Structural Loads Workshop for Preliminary Aerospace Design Projects, A.F. Flight Dynamics Laboratory and Deputy for Development Planning, Aeronautical Systems Division, 18-19 September 1973.
3. Civil History:
  - a. Shanley, F.R., "Historical Note on the 1.5 Factor of Safety for Aircraft Structures," Readers' Forum, Journal of the Aerospace Sciences, Vol. 29, No. 2, February 1962.
  - b. Bogert, G.D., and Alcorn, A.M., "Required Factor of Safety for Design of Civil Aircraft," Appendix A to "Is the Present Aircraft Structures Factor of Safety Realistic?" by G.M. Manquarian, Aerospace Engineering Preview, September 1964.
4. Norton, F.H. and Allen, F.T., Accelerations in Flight, NACA TR 99, 1921.
5. Doolittle, J.H., Accelerations in Flight, NACA TR No 203, 1924.
6. Rhode, R.V., The Pressure Distribution Over the Horizontal and Vertical Tail Surfaces of a PW-9 Pursuit Airplane in Flight, NACA TR No 307, June 1929.
7. Rhode, R.V., The Pressure Distribution Over the Wings and Tail Surfaces of a PW-9 Pursuit Airplane in Flight, NACA TR No 364, 1930.
8. Roche, J.A., Proposed Method of Determining Design Tail Loads for Airplanes, Air Corps Circular No 650, May 10, 1930.

## REFERENCES (CONTINUED)

9. Pack, M.N., and Bogert, H.Z., Comparison of the Structural Design Requirements for Airplanes with load Obtained in Full-Scale Pressure Distribution Tests, Air Corps Information Circular, No. 672, June 30, 1932.
10. Bureau of Aeronautics Specifications:
  - SS-1 - General Specification for the Structural Strength and Flight Limitations for Airplanes.
  - SS-2 - Specification for the Determination of Applied Loads on Wing Cell of Biplanes.
  - SS-3 - Specification for the Structural Design of the Wing Group.
  - SS-5 - Specification for Determination of the Equivalent Semi-Wing and the Structural Mean Chord from the Properties of the Actual Wing.
  - SS-6A - Specification for the Determination of Air Loads on Wing Ribs.
  - SS-12 - Specification for Calculation of Terminal Velocity for Structural Design Purposes.
  - SS-271 - Aerodynamics Report of the Distribution of Air Loads Between Biplane Wings.
11. Epstein, A., Investigation of the Comparative Design Requirements for Airplanes of the Army Air Corps and of the Bureau of Aeronautics, Air Corps Technical Report No. 3924, February 1934 (Unpublished).
12. Rhode, R.V., Applied Wing Load Factors, NACA Special Report to the Services, 1933 (Unpublished).
13. Press, H., and Steiner, R., An Approach to the Problem of Estimating Severe and Repeated Gust Loads for Missile Operations, NACA TR 4332, September 1958.
14. Press, H., Meadows, M.L., and Hadlock, I., A Reevaluation of Data on Atmospheric Turbulence and Airplane Gust Loads for Application in Spectral Calculation, NACA Report 1272, 1956.
15. Schmid, C.J., Dyna Soar Booster System Structural Criteria, WCLSSC Section Memorandum, Wright-Patterson Air Force Base, Ohio 45433, 7 April 1959.
16. Epstein, A., and Hamilton, A.L., Exit, Space and Reentry Structural Design Criteria, ASD-TDR-62-641, Wright-Patterson Air Force Base, Ohio 45433, December 1962.

## REFERENCES (CONTINUED)

17. Baum, C.P., "Reliability of Airframe Structures - General Aspects of the Problem and Outline of Methods for Attaining," Proceedings of the Aerospace Reliability and Maintainability Conference, Washington, D.C., June 29-July 1, 1964.
18. Mangurian, G. N., "Is the Present Aircraft Structural Factor of Safety Realistic?", Aeronautical Engineering Review, September 1954.
19. Marr, W.H., "Basic Weight Trends for Bomber and Transport Aircraft," Twenty-third Annual National Conference of the Society of Aeronautical Weight Engineers, May 1964.
20. Kurschner, H., and Bruhn, E., A Parametric Study Concerning the Structural Factor of Safety for Aerospace Vehicles, RTD-TDR-63-4084, March 1954.
21. Landes, F.I., Wagner, R.L., Kreisshauser, W.A., An Investigation of the Definition of Missile Structural Design Criteria Requirements on a Reliability Basis, - Part I, "The Integration of Current Data into Recommended Requirements" - Part II, Readey, W.B., "The Development of a Method Framework for Determining the Quantitative Structural Requirements Necessary to Achieve a Given Level of Structural Reliability," WADD-TR-60-556, Wright-Patterson Air Force Base, Ohio 45433, August 1960.
22. Wagner, R.L., Kreisshauser, W.A., Jr., Wilson, J.W., Structural Criteria and Loads Flight Data Correlation, AFFDL-TR-65-31, Vol V, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio 45433, November 1965.
23. Epstein, A., Hamilton, A.L., Study of Design Parameters for Structure Subject to Aerodynamic Heating, ASD-TR-61-95, Aeronautical Systems Division, Wright-Patterson Air Force Base, Ohio 45433, August 1962.
24. Gallagher, R.H., Buckley, W.H., Batt, J.R., Janis, M., A Study to Develop Design Criteria for Aerodynamically Heated Swept and Delta Wing Structures, Vol I, "Summary Report," AFFDL-TR-65-127, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio 45433, March 1966.
25. Epstein, A., Reliability Procedures in Aircraft Design Requirements and in Design Practice, Unpublished Notes, Aeronautical Systems Division, Wright-Patterson Air Force Base, Ohio 45433, October 1964.
26. Stevenson, J., and Moses, E., "Reliability Analysis of Frame Structures," Journal of the Structural Division, ASCE, Vol 96, No 5111, November 1970.
27. Moses, E., and Stevenson, J.P., "Reliability-Based Structural Design," Journal of the Structural Division, ASCE, Vol 96, No 5112, Feb 1970.

## REFERENCES (CONTINUED)

28. Switzky, H., "Designing for Structural Reliability," *Journal of Aircraft*, Vol. 2, No. 6., Nov-Dec 1965.
29. Bouton, I., Trent, D.J., Fisk, M., Mellugh, A.H., Quantitative Structural Design Criteria by Statistical Methods, - Vol I, "A Critique of Present and Proposed Approaches to Structural Design Criteria" - Vol II, "The Philosophy and Implementation of the New Procedure," AFFDL-TR-67-107, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio, 45433, June 1968.
30. Campion, M.C., Hanson, L.C., Morcock, D.S., Implementation Studies for a Reliability-Based Static Strength Criteria System, - Vol I "Evaluation," - Vol II, "Implementation," AFFDL-TR-71-78, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio 45433, February 1972.
31. Whittaker, T. C., Besuner, P.M., A Reliability Analysis Approach to Fatigue Life Variability of Aircraft Structures, AFML-TR-69-65, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio 45433, April 1969.
32. Fruedenthal, A.M., Shinozuka, M., Structural Safety Under Conditions of Ultimate Load Failure and Fatigue, WADD-TR-61-177, Wright-Patterson Air Force Base, Ohio 45433, October 1961.
33. Sarhpie, C.S., Jr., Watson, R.S., Evaluation of a Reliability Analysis Approach to Fatigue Life Variability of Aircraft Structures Using C-130 In Service Operational Data, AFML-TR-70-277, Air Force Materials Laboratory, Wright-Patterson Air Force Base, Ohio 45433, February 1971.
34. Report on Statistical Maneuver Loads Research, Special Panel of the NACA Subcommittee on Aircraft Loads, June 1964.
35. Bouton, I., Graff, K.G., Development of Structural Design Criteria from Statistical Flight Data, WADD-TR-60-497, Wright-Patterson Air Force Base, Ohio 45433, January 1966.
36. Trent, D.J., Cowen, A.L., Bouton, I., "Application of Multiparameter Flight Loads Data to Structural Design Criteria," AFFDL-TR-68-131, Vol. I-IV, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio, March 1969.
37. Thompson, B.B., Laser, J.B., Brown, R.S., Research Study on Ground Environment Loads Criteria for Guided Missiles, WADC-TR-59-677, Wright-Patterson Air Force Base, Ohio 45433, August 1967.
38. Lemer, G.C., Kreisshauser, W.A., Landes, P.L., An Investigation of Launch Phase Structural Design Criteria for Flight Vehicles, ASD-TR 61-61, Wright-Patterson Air Force Base, Ohio 45433, September 1967.

## REFERENCES (CONCLUDED)

39. Shepherd, J.D., Bittig, J.W., Kammer, W.L., An Investigation of Flight Phase Structural Design Criteria for Flight Vehicles, ASD-TR-61-62, Wright-Patterson Air Force Base, Ohio 45433, June 1962.
40. Hahn, P.G., Structural Design Criteria for Stage Separation, ASD-TR-61-671, Wright-Patterson Air Force Base, Ohio 45433, January 1963.
41. Bouton, I., Ujihara, B.H., Flight Vehicle Structural Design Criteria, Recovery Phase, ASD-TDR-63-453, Wright-Patterson Air Force Base, Ohio 45433, September 1963.
42. Pugsley, A.G., "The Safety of Structures," Edward Arnold, London, England 1966.
43. Bigham, C.R., "The Complementary Roles of Analysis and Testing in Aircraft Structural Substantiation," National Business Aircraft Meeting, Society of Automotive Engineers, March 1970.
44. Jones, B.H., Probabilistic Design and Reliability, Composite Materials, Structural Design and Analysis, Part II, Academic Press, New York, N.Y., 1975.
45. Bording, W.C., Diederich, F.W., Parker, P.S., "Structural Optimization and Design Based on a Reliability Design Criterion," AIAA Launch and Space Vehicle Shell Structures Conference, April 1963.
46. Hilton, H.H., Feigen, M., "Minimum Weight Analysis Based on Structural Reliability," Third Symposium on High-Speed Aerodynamics and Structures, USAF, University of California, Ryan Aeronautical Co., Convair, March 1958.
47. Beeby, A.W., Cranston, W.B., "Influence of Load Systems on Safety," Civil Engineering and Public Works Review, December 1973.
48. Christensen, C.M., "Designing for Airline Safety," Aerospace Engineering, September 1962.
49. Stewart, C.B., "Aircraft Manufacturer's Air Safety Program - The SST System Safety Program" Air Safety Symposium, Journal of the Air Law and Commerce, Vol 34, 1968.