

AD-A070 562


ARMY ELECTRONICS COMMAND WHITE SANDS MISSILE RANGE N--ETC F/G 4/2  
19702A GSRS, MISSILE NUMBER 339, ROUND NUMBER B-8.(U)  
APR 79

UNCLASSIFIED

ECOM-DR-998

NL

| OF |  
AD  
A070562

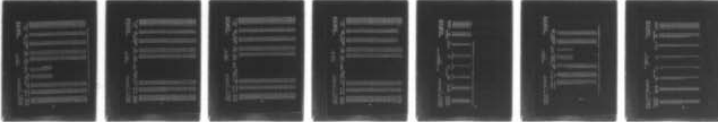

END  
DATE  
FILMED  
8 79  
DDC

ADA070562

LEVEL

(2)

MEMORANDUM FOR THE DIRECTOR

1870A-535  
Wallops No. 338  
Sound No. 3-5

WFO Meteorological Team

D.D.C.  
RECEIVED  
1870A-535  
Wallops No. 338  
Sound No. 3-5

THIS FILE COPY

COMMERCIAL RESEARCH LABORATORY  
2000 EAST MICHIGAN AVENUE, ANN ARBOR, MICHIGAN 48106

BOOM

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

14 <b>ECOM - REPORT DOCUMENTATION PAGE</b>		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER DR-998		2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
6 <b>1970A GSRS, Missile Number 339, Round Number B-8.</b>		5. TYPE OF REPORT & PERIOD COVERED	
7. AUTHOR WSMR Meteorological Team		6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS <i>data rept.</i>		8. CONTRACT OR GRANT NUMBER(s) DA Task 116657-2D126/02	
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Electronics Research & Development Comd Atmospheric Sciences Laboratory White Sands Missile Range, New Mexico		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 11	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) US Army Electronics Research & Development Comd		12. REPORT DATE April 1979	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		13. NUMBER OF PAGES 12 19 p.	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15. SECURITY CLASS. (of this report) UNCLASSIFIED	
18. SUPPLEMENTARY NOTES		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) 1. Ballistics 2. Meteorology 3. Wind			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Meteorological data gathered for the launching of 1970A GSRS, Missile Number 339, Round B-8, are presented in tabular form.			

400 844

Handwritten signature or initials

CONTENTS

	PAGE
INTRODUCTION -----	1
DISCUSSION -----	1
MAP -----	2
TABLES	
I. SURFACE OBSERVATIONS TAKEN AT 1130 MST AT LC-33 -----	3
II. ANEMOMETER MEASURED WIND SPEED AND DIRECTION, LC-33 FIXED POLE, TAKEN AT 1127 MST -----	4
III. ANEMOMETER MEASURED WIND SPEED AND DIRECTION, TOWER LEVELS 1, 2, 3, AND 4 TAKEN AT 1127 MST -----	5
IV. PILOT-BALLOON-MEASURED WIND DATA AT 1115 MST -----	6
V. PILOT-BALLOON-MEASURED WIND DATA AT 1127 MST -----	7
VI. SMR SIGNIFICANT LEVEL DATA AT 1130 MST -----	8
VII. SMR UPPER AIR DATA AT 1130 MST -----	9-13
VIII. MRN SIGNIFICANT LEVELS AT 1130 MST -----	14
IX. SMR MANDATORY LEVELS AT 1130 MST -----	15
X. SMR MRN MANDATORY LEVELS AT 1130 MST -----	16

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

## INTRODUCTION

19702A GSRS, Missile Number 339, Round Number B-8, was launched from LC-33, White Sands Missile Range (WSMR), New Mexico, at 1127 MST, 5 April 1979. The scheduled launch time was 1125 MST.

## DISCUSSION

Meteorological data were recorded and reduced by the White Sands Meteorological Team, Atmospheric Sciences Laboratory (ASL), White Sands Missile Range, New Mexico. The data were obtained by the following methods:

### 1. Observations

#### a. Surface

(1) Standard surface observations to include pressure, temperature ( $^{\circ}\text{C}$ ), relative humidity, dew point ( $^{\circ}\text{C}$ ), density ( $\text{gm}/\text{m}^3$ ), wind direction, wind velocity and cloud cover were made at the LC-33 Met Site at T-0 minutes.

(2) Anemometer data were provided from existing pole-mounted and tower-mounted anemometers at LC-33. Monitor of wind speed and direction from one anemometer was also provided in the launch control room.

#### b. Upper Air


(1) Low level wind data were obtained from RPTS T-9 pibal observation as follows:

#### SITE AND ALTITUDE

LC-33 1 km (50 m incs) 1115 MST

1 km (50 m incs) 1127 MST

(2) Air structure data (rawinsonde) were collected at the SMR Met Site at T-0 minutes. Data were collected from surface to 125% of apogee in 500-foot increments.

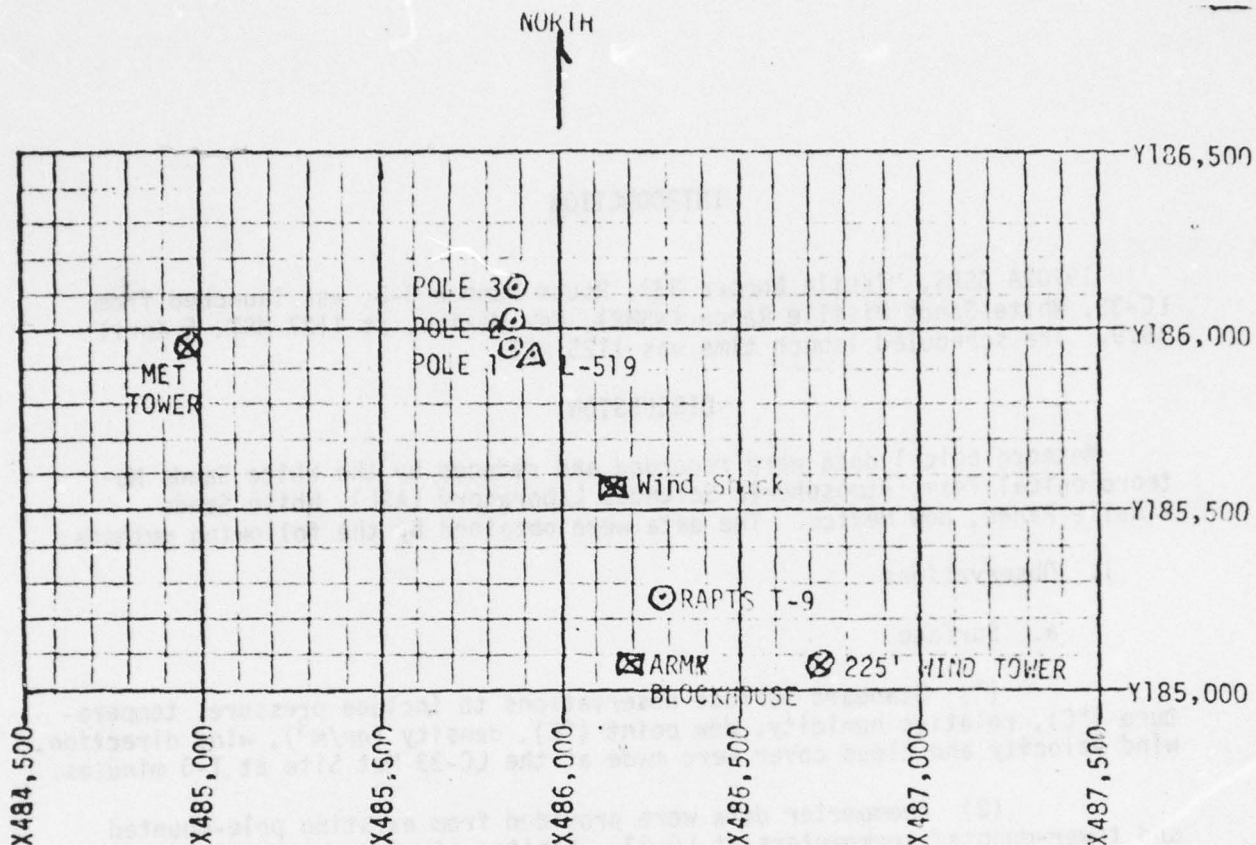

1. MET TOWER - 4 Bendix Model T-120 Anemometers at 12 ft, 62 ft, 102 ft and 202 ft with E/A recorders in Wind Shack.
2. POLE ANEMOMETER - Bendix Model T-120 with E/A recorders in Wind Shack
  - (a) Pole #1 - 38.7 ft
  - (b) Pole #2 - 53.0 ft
  - (c) Pole #3 - 83.6 ft
3. 225 FT WIND TOWER - 5 Bendix Model T-120 Anemometers at 35 ft, 83 ft, 128 ft, 168 ft and 200 ft with 5 X-Y visual indicators in Blockhouse.
4. RAPTS T-9 - Radar Automatic Pilot-Balloon Tracking System T-9 Radar

ELEVATION	3977.3	FEET/MSL
PRESSURE	883.1	MBS
TEMPERATURE	18.0	°C
RELATIVE HUMIDITY	31	%
DEW POINT	0.6	°C
DENSITY	1052	GM/M <sup>3</sup>
WIND SPEED	04	MPH
WIND DIRECTION	040	DEGREES
CLOUD COVER	CLEAR	

TABLE I. SURFACE OBSERVATIONS TAKEN AT 1130 LOCAL TIME,  
5 APRIL 1979 AT LC-33, 19702A GSRS, MISSILE NO. 339,  
ROUND NO. B-8.

LC33 FIXED POLE ANEMOMETER MEASURED WINDS

POLE #1			POLE #2			POLE #3		
T-TIME SEC	DIR DEG	SPEED MPH	T-TIME SEC	DIR DEG	SPEED MPH	T-TIME SEC	DIR DEG	SPEED MPH
-30	036	10	-30	058	00	-30	062	15
-20	049	11	-20	060	00	-20	050	13
-10	038	09	-10	062	00	-10	053	15
0.0	055	09	0.0	062	00	0.0	056	20
+10	047	13	+10	056	03	+10	048	16

POLE #1 = X485,874.29 Y185,958.90 H4018.74 38.7 ft. AGL

POLE #2 = X485,874.93 Y186,012.00 H4033.57 53.0 ft. AGL

POLE #3 = X485,877.29 Y186,116.06 H4063.92 83.6 ft. AGL

TABLE II

TYPE 19702A GSRS (FD) MISSILE NO. 339 ROUND NO. B-8

LAUNCHED FROM LC-33 DATE 5 April 1979 TIME 1127 LST

NOTE: WIND DIRECTIONS ARE REFERENCED TO THE FIRING AZIMUTH \_\_\_\_\_

OR TRUE NORTH TRUE NORTH



LC-33 METEOROLOGICAL TOWER ANEMOMETER MEASURED WINDS (202 FT TOWER)

LEVEL #1 12 ft			LEVEL #2 62 ft		
T-TIME SEC	DIR DEG	SPEED MPH	T-TIME SEC	DIR DEG	SPEED MPH
-30	070	8	-30	032	10
-20	035	10	-20	026	12
-10	020	11	-10	003	12
0.0	007	10	0.0	360	12
+10	018	10	+10	360	12
LEVEL #3 102 ft			LEVEL #4 202 ft		
T-TIME SEC	DIR DEG	SPEED MPH	T-TIME SEC	DIR DEG	SPEED MPH
-30	037	20	-30	010	40
-20	028	20	-20	010	38
-10	018	19	-10	010	36
0.0	015	19	0.0	010	36
+10	012	19	+10	010	39

WTSM COORDINATES: X484,982.64 Y185,957.73 H3983.00 (base)

TABLE III

TYPE 19702A GSRS (FD) MISSILE NO. 339 ROUND NO. B-8

LAUNCHED FROM LC-33 DATE 5 April 1979 TIME 1127 MST

NOTE: WIND DIRECTIONS ARE REFERENCED TO THE FIRING AZIMUTH \_\_\_\_\_

OR TRUE NORTH TRUE NORTH

PILOT BALLOON MEASURED WIND DATA

HEIGHT METERS	DIR DEG	SPEED MPH
SUR	040	04
50	033	02
100	027	01
150	007	07
200	025	10
250	030	11
300	036	11
350	060	09
400	040	09
450	040	06
500	041	08

HEIGHT METERS	DIR DEG	SPEED MPH
550	035	09
600	359	06
650	343	04
700	076	04
750	077	07
800	041	06
850	305	04
900	343	02
950	358	07
1000	003	06
1050		

TABLE IV

RELEASED FROM LC-33 DATE 5 April 1979 TIME 1115 LST

RELEASE POINT COORDINATES (WSTM) X = 486,037.24 Y = 182,350.16 H = 3977.30

MISSILE TYPE 19702A GSRs MISSILE NO. 339 ROUND NO. B-8

MISSILE LAUNCHED FROM LC-33 DATE 5 April 1979 TIME 1127 LST

NOTE: WIND DIRECTIONS ARE REFERENCED TO THE FIRING AZIMUTH \_\_\_\_\_

OR TRUE NORTH TRUE NORTH

PILOT BALLOON MEASURED WIND DATA

HEIGHT METERS	DIR DEG	SPEED MPH
SUR	060	05
50	045	07
100	031	09
150	044	11
200	010	10
250	347	09
300	355	08
350	349	07
400	037	10
450	036	10
500	009	04

HEIGHT METERS	DIR DEG	SPEED MPH
550	015	04
600	042	06
650	357	09
700	002	10
750	018	08
800	027	05
850	354	01
900	279	03
950	279	01
1000	223	04
1050		

TABLE  V

RELEASED FROM  LC-33  DATE  5 April 1979  TIME  1127  LST

RELEASE POINT COORDINATES (WSTM) X =  486,037.24  Y =  182,350.16  H =  3977.30

MISSILE TYPE  19702A GSRS  MISSILE NO.  339  ROUND NO.  B-8

MISSILE LAUNCHED FROM  LC-33  DATE  5 April 1979  TIME  1127  LST

NOTE: WIND DIRECTIONS ARE REFERENCED TO THE FIRING AZIMUTH \_\_\_\_\_

OR TRUE NORTH  TRUE NORTH  .

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 HRS MST  
 ASCENSION, MO. 58

SIGNIFICANT LEVEL DATA  
 0950000000  
 S M R

GEODETIC COORDINATES  
 32.42034 LAT DEG  
 106.42307 LON DEG

PRESSURE	GEOMETRIC ALTITUDE	TEMPERATURE	REL. HUM.
MILLIBARS	MSL FEET	AIR DEGREE	PERCENT
		CENTIGRADE	
682.2	3997.3	20.4	26.0
674.0	4259.8	16.5	23.0
650.0	5033.7	14.0	26.0
642.6	5275.4	13.5	26.0
791.8	6979.4	8.9	30.0
771.8	7672.1	6.8	32.0
752.0	8372.4	6.1	32.0
713.6	9733.6	6.5	18.0
700.0	10301.4	5.9	18.0
569.6	15721.8	-6.3	19.0
500.0	19021.5	-14.4	21.0
435.6	22400.3	-23.3	21.0
400.0	24434.0	-28.0	21.0
346.6	27709.8	-35.3	21.0
300.0	31022.4	-42.3	21.0
250.0	35019.0	-50.6	
200.0	39709.6	-60.0	
193.2	40418.2	-61.8	
150.0	45575.1	-62.4	
125.0	49274.8	-63.7	
102.0	53235.8	-67.4	
100.0	53747.3	-66.5	
77.4	59914.4	-62.5	
70.0	60322.7	-64.3	
60.6	61904.9	-61.6	
58.6	64594.7	-59.8	
51.0	67400.9	-60.0	
50.0	67871.2	-58.1	
30.0	76501.5	-54.3	
27.4	80504.4	-45.0	
25.8	81993.1	-45.5	
22.6	84834.6	-39.3	
20.0	87602.2	-43.2	
10.4	102603.3	-34.0	

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 HRS MST  
 ASCENSION NO. 38

UPPER AIR DATA  
 075000Z  
 S M R

GEODETIC COORDINATES  
 32.48034 LAT DEG  
 106.42307 LON DEG

GEOMETRIC ALTITUDE MSL FEET	PRESSURE MILLIBARS	TEMPERATURE AIR DEGREES	TEMPERATURE DEWPOINT DEGREES	REL. HUM. PERCENT	DENSITY METER	SPEED OF SOUND NNUTS	WIND DIRECTION DEGREES(TW)	WIND SPEED KNOTS	INDEX OF REFRACTION
3997.3	862.2	20.4	.3	26.0	1044.1	666.4	343.0	8.0	1.000260
4000.0	862.1	20.4	.2	26.0	1044.2	663.3	343.1	7.9	1.000260
4500.0	806.5	15.7	-4.8	23.9	1043.0	662.0	12.0	4.0	1.000252
5000.0	851.0	14.1	-5.1	25.9	1030.2	660.9	64.8	4.4	1.000249
5500.0	835.7	12.9	-5.9	26.5	1016.0	659.5	62.2	3.3	1.000245
6000.0	820.6	11.5	-6.5	27.7	1002.4	657.9	63.0	2.1	1.000241
6500.0	805.8	10.2	-7.1	28.9	989.0	656.3	19.5	1.3	1.000237
7000.0	791.2	9.8	-7.7	30.1	975.3	654.7	303.7	2.4	1.000234
7500.0	776.7	7.3	-8.5	31.5	963.2	653.0	283.1	4.8	1.000230
8000.0	762.5	6.5	-9.0	32.0	948.5	651.9	263.4	8.4	1.000226
8500.0	748.4	6.1	-9.8	30.7	932.2	651.5	279.4	12.3	1.000222
9000.0	734.7	6.3	-11.9	25.6	914.9	651.0	269.8	13.6	1.000216
9500.0	721.2	6.4	-14.4	20.0	897.7	651.7	260.7	15.0	1.000210
10000.0	707.9	6.2	-16.3	18.0	831.3	651.5	251.2	15.6	1.000205
10500.0	694.7	5.5	-16.9	18.0	867.9	650.3	252.2	16.1	1.000201
11000.0	681.6	4.3	-17.8	18.1	855.1	649.2	252.8	16.7	1.000198
11500.0	668.9	3.2	-18.5	18.2	842.4	647.9	269.4	17.3	1.000195
12000.0	656.2	2.1	-19.5	18.3	830.0	646.3	263.5	17.9	1.000191
12500.0	643.8	1.0	-20.4	18.4	817.7	645.2	263.7	18.1	1.000188
13000.0	631.7	-2.2	-21.3	18.5	805.7	643.9	263.3	18.1	1.000185
13500.0	619.8	-1.3	-22.1	18.6	793.0	642.5	261.0	16.9	1.000182
14000.0	606.1	-2.4	-23.0	18.7	782.1	641.2	259.8	16.0	1.000179
14500.0	596.7	-3.0	-23.9	18.8	770.0	639.8	250.1	15.6	1.000176
15000.0	585.5	-4.7	-24.8	18.9	759.3	638.3	245.9	14.9	1.000173
15500.0	574.4	-5.3	-25.7	19.0	746.1	637.1	243.1	14.0	1.000171
16000.0	563.4	-7.0	-26.5	19.2	737.0	635.7	243.0	12.3	1.000168
16500.0	552.4	-8.2	-27.4	19.3	726.0	634.3	243.2	10.7	1.000165
17000.0	541.6	-9.4	-28.3	19.6	715.1	632.8	251.2	11.0	1.000163
17500.0	531.0	-10.7	-29.1	20.1	704.4	631.3	254.4	11.4	1.000160
18000.0	520.6	-11.9	-30.0	20.4	693.9	629.8	257.9	12.0	1.000157
18500.0	510.4	-13.1	-30.9	20.7	683.6	628.3	261.0	12.5	1.000155
19000.0	500.4	-14.3	-31.8	21.0	673.4	626.8	263.4	12.8	1.000152
19500.0	490.3	-15.7	-32.9	21.0	663.2	625.2	267.8	13.1	1.000150
20000.0	480.4	-17.0	-34.0	21.0	653.2	623.6	272.5	13.3	1.000147
20500.0	470.7	-18.3	-35.2	21.0	643.3	622.0	273.3	13.6	1.000145
21000.0	461.2	-19.6	-36.3	21.0	633.6	620.4	277.2	13.7	1.000143
21500.0	451.9	-20.9	-37.4	21.0	624.0	618.8	271.2	14.2	1.000140
22000.0	442.8	-22.2	-38.5	21.0	614.7	617.1	263.7	14.9	1.000138
22500.0	433.8	-23.5	-39.6	21.0	605.3	615.6	260.7	15.5	1.000136
23000.0	424.8	-24.7	-40.6	21.0	595.5	614.1	259.2	16.2	1.000134

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 IMS MST  
 ASCENSION 10. 38

UPPER AIR DATA  
 095006055  
 S M R

GEODETIC COORDINATES  
 32.48034 LAT DEG  
 106.42307 LON DEG

GEOMETRIC ALTITUDE MSL FEET	PRESSURE MILLIBARS	TEMPERATURE AIR DEGREES	TEMPERATURE DRY POINT DEGREES	REL. HUM. PERCENT	DENSITY GM/CUBIC METER	SPEED OF SOUND KNOTS	WIND DIRECTION DEGREES (TN)	WIND SPEED KNOTS	INDEX OF REFRACTION
23500.0	410.0	-25.8	-41.6	21.0	585.9	612.7	249.4	15.2	1.000131
24000.0	407.3	-27.0	-42.6	21.0	576.4	614.3	249.8	14.2	1.000129
24500.0	398.9	-28.1	-43.6	21.0	567.1	609.8	252.0	14.4	1.000127
25000.0	390.4	-29.2	-44.5	21.0	557.5	608.5	255.0	14.9	1.000125
25500.0	382.1	-30.3	-45.5	21.0	546.1	607.1	257.1	17.8	1.000123
26000.0	374.0	-31.4	-46.4	21.0	536.9	605.7	258.4	20.7	1.000121
26500.0	366.0	-32.5	-47.3	21.0	529.9	604.3	261.2	23.4	1.000119
27000.0	358.3	-33.6	-48.3	21.0	521.0	603.0	263.1	26.2	1.000117
27500.0	350.6	-34.7	-49.2	21.0	512.3	601.8	265.4	29.3	1.000115
28000.0	343.1	-35.8	-50.0	19.5**	503.5	600.2	267.2	32.5	1.000113
28500.0	335.6	-36.9	-50.8	16.3**	494.7	598.9	269.3	35.4	1.000110
29000.0	328.2	-37.9	-51.7	13.1**	486.1	597.5	271.1	39.1	1.000108
29500.0	321.1	-39.0	-52.0	9.9**	477.7	596.1	272.3	39.1	1.000107
30000.0	314.0	-40.1	-52.8	6.6**	469.4	594.8	272.4	40.6	1.000105
30500.0	307.2	-41.2	-53.4	3.4**	461.2	593.4	269.9	43.8	1.000103
31000.0	300.4	-42.2	-54.5	.2**	453.2	592.0	267.6	44.0	1.000101
31500.0	293.7	-43.3	-55.3		445.0	590.7	265.6	41.4	1.000099
32000.0	287.0	-44.3	-56.4		436.9	589.3	264.4	39.7	1.000097
32500.0	280.5	-45.4	-57.5		429.0	588.0	263.3	38.7	1.000096
33000.0	274.2	-46.4	-58.6		421.2	586.6	261.4	41.4	1.000094
33500.0	268.0	-47.4	-59.8		413.5	585.3	260.0	44.0	1.000092
34000.0	261.9	-48.5	-61.5		406.1	583.9	259.4	46.0	1.000090
34500.0	256.0	-49.5	-62.8		398.8	582.6	259.4	48.0	1.000089
35000.0	250.2	-50.6	-64.5		391.6	581.2	260.4	50.2	1.000087
35500.0	244.3	-51.6			384.1	579.9	261.0	52.5	1.000086
36000.0	238.6	-52.6			376.8	578.6	260.9	54.9	1.000084
36500.0	233.0	-53.6			369.6	577.3	260.4	56.8	1.000082
37000.0	227.5	-54.6			362.5	576.0	260.7	58.0	1.000081
37500.0	222.2	-55.6			355.7	574.8	260.7	58.5	1.000079
38000.0	216.9	-56.6			349.0	573.5	260.9	57.1	1.000078
38500.0	211.6	-57.6			342.3	572.0	261.2	55.8	1.000076
39000.0	206.9	-58.6			335.9	570.7	261.5	55.8	1.000075
39500.0	202.0	-59.6			329.5	569.3	261.4	55.8	1.000073
40000.0	197.2	-60.7			323.4	567.8	262.0	55.4	1.000072
40500.0	192.4	-61.7			317.2	566.4	262.9	55.0	1.000071
41000.0	187.6	-62.7			309.5	565.0	262.7	54.9	1.000069
41500.0	183.2	-63.7			302.2	563.2	263.2	54.6	1.000067
42000.0	178.8	-64.7			294.9	561.1	263.0	55.1	1.000066
42500.0	174.4	-65.7			287.8	559.0	262.6	55.5	1.000064
43000.0	170.2	-66.7			280.9	556.8	262.4	57.2	1.000063

\*\* AT LEAST ONE ASSUMED RELATIVE HUMIDITY VALUE WAS USED IN THE INTERPOLATION.

UPPER AIR DATA  
 095006HUB  
 5 M R

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 HRS MST  
 ASCENSTION NO. 58

GEODETIC COORDINATES  
 32.48034 LAT DEG  
 106.42307 LONG DEG

GEOMETRIC ALTITUDE MSL FEET	PRESSURE MILLIBARS	TEMPERATURE AIR DEGREES	TEMPERATURE DEWPOINT DEGREES	REL. HUM. PERCENT	DENSITY G/M <sup>3</sup> METER	SPEED OF SOUND KNOTS	WIND DATA DIRECTION DEGREES (TM)	SPEED KNOTS	INDEX OF REFRACTION
4350.0	106.1	-62.2			274.2	503.9	253.9	60.0	1.000061
4400.0	102.1	-62.2			267.6	503.6	253.6	63.1	1.000060
4450.0	100.1	-62.3			261.2	503.7	252.4	66.3	1.000058
4500.0	154.3	-62.3			255.0	503.7	253.1	69.0	1.000057
4550.0	150.6	-62.4			248.9	503.0	255.6	70.5	1.000055
4600.0	148.9	-62.5			243.0	503.4	258.0	72.2	1.000054
4650.0	143.3	-62.7			237.3	503.1	258.3	74.4	1.000053
4700.0	139.6	-62.9			231.7	504.9	259.5	76.6	1.000052
4750.0	136.4	-63.1			226.2	504.7	258.2	76.9	1.000050
4800.0	133.1	-63.2			220.9	504.4	257.8	76.9	1.000049
4850.0	129.9	-63.4			215.7	504.2	258.0	75.3	1.000048
4900.0	126.7	-63.6			210.6	503.9	258.4	72.8	1.000047
4950.0	123.6	-63.9			205.0	503.5	259.1	71.5	1.000046
5000.0	120.6	-64.4			201.2	502.9	259.8	71.6	1.000045
5050.0	117.6	-64.8			196.7	502.3	260.0	72.0	1.000044
5100.0	114.7	-65.3			192.2	501.0	261.2	74.6	1.000043
5150.0	111.9	-65.8			187.9	501.0	261.8	77.2	1.000042
5200.0	109.1	-66.2			183.7	500.4	262.3	78.1	1.000041
5250.0	106.4	-66.7			179.6	500.7	262.8	78.2	1.000040
5300.0	103.8	-67.2			175.6	500.1	262.9	77.2	1.000039
5350.0	101.2	-66.9			171.0	500.4	262.5	74.2	1.000038
5400.0	98.8	-66.3			166.3	500.3	262.3	71.1	1.000037
5450.0	96.3	-65.9			161.9	500.6	263.0	66.1	1.000036
5500.0	94.0	-65.5			157.7	501.3	264.0	61.1	1.000035
5550.0	91.7	-65.1			153.5	501.9	264.6	57.7	1.000034
5600.0	89.4	-64.6			149.3	502.4	265.3	54.5	1.000033
5650.0	87.2	-64.4			145.0	502.9	264.9	52.7	1.000032
5700.0	85.1	-64.0			141.7	503.4	263.5	52.1	1.000032
5750.0	83.0	-63.6			138.0	504.0	262.4	51.5	1.000031
5800.0	81.0	-63.2			134.4	504.5	262.1	51.0	1.000030
5850.0	79.0	-62.8			130.9	505.0	261.9	50.4	1.000029
5900.0	77.1	-62.6			127.5	505.3	261.4	49.5	1.000028
5950.0	75.2	-62.0			124.7	504.7	261.9	48.6	1.000028
6000.0	73.4	-61.5			121.9	504.1	261.9	47.8	1.000027
6050.0	71.6	-61.9			119.2	503.5	261.7	47.3	1.000027
6100.0	69.6	-62.2			116.4	503.2	261.7	46.9	1.000026
6150.0	68.1	-62.8			112.9	503.0	262.0	46.9	1.000025
6200.0	66.5	-61.6			109.3	502.7	262.2	46.8	1.000024
6250.0	64.9	-61.2			106.7	502.1	263.3	46.8	1.000024
6300.0	63.3	-60.9			103.9	501.6	264.5	46.7	1.000023

UPPER AIR DATA  
 0950060050  
 5 M R

STATION ALTITUDE 2997.30 FEET MSL  
 5 APR. 79 1130 HRS MST  
 ASCENSION NO. 38

GEODETIC COORDINATES  
 32.48034 LAT DEG  
 106.42307 LONG DEG

GEOMETRIC ALTITUDE MSL FEET	PRESSURE MILLIBARS	TEMPERATURE AIR DEGREES	REL. HUM. PERCENT	WIND DIRECTION DEGREES (TM)	WIND SPEED KNOTS	INDEX OF REFRACTION
0350.0	61.8	-60.5	101.3	265.8	46.5	1.000023
0400.0	60.3	-60.2	96.7	267.2	46.4	1.000022
0450.0	58.9	-59.9	96.2	268.4	46.1	1.000021
0500.0	57.5	-59.8	93.8	268.7	45.4	1.000021
0550.0	56.1	-59.9	91.0	269.0	44.7	1.000020
0600.0	54.7	-59.9	89.4	267.4	43.5	1.000020
0650.0	53.4	-59.9	87.3	265.1	42.2	1.000019
0700.0	52.2	-60.0	85.2	262.0	41.1	1.000019
0750.0	50.9	-59.8	83.1	259.9	40.4	1.000019
0800.0	49.7	-58.1	80.5	257.0	39.7	1.000018
0850.0	48.5	-57.9	78.5	250.1	39.2	1.000017
0900.0	47.4	-57.7	76.5	255.8	38.7	1.000017
0950.0	46.2	-57.5	74.6	253.6	38.3	1.000017
1000.0	45.2	-57.3	72.9	250.2	37.7	1.000016
1050.0	44.1	-57.2	71.2	255.8	37.2	1.000016
1100.0	43.1	-57.0	69.4	257.8	36.6	1.000015
1150.0	42.1	-56.9	67.7	253.3	35.9	1.000015
1200.0	41.1	-56.6	66.1	260.8	35.2	1.000015
1250.0	40.1	-56.5	64.5	263.2	34.3	1.000014
1300.0	39.2	-56.3	62.9	265.8	33.4	1.000014
1350.0	38.2	-56.1	61.4	268.2	32.6	1.000014
1400.0	37.3	-55.9	59.9	269.4	31.3	1.000013
1450.0	36.5	-55.5	58.4	270.6	30.0	1.000013
1500.0	35.6	-55.6	57.0	270.6	28.4	1.000013
1550.0	34.6	-55.4	55.8	269.2	26.3	1.000012
1600.0	34.0	-55.2	54.5	267.4	24.3	1.000012
1650.0	33.2	-55.0	53.0	263.4	23.4	1.000012
1700.0	32.4	-54.9	51.7	259.8	23.0	1.000012
1750.0	31.6	-54.7	50.4	255.9	23.1	1.000011
1800.0	30.9	-54.5	49.2	253.1	28.0	1.000011
1850.0	30.1	-54.3	48.0	254.6	32.9	1.000011
1900.0	29.5	-52.4	46.5	255.6	37.5	1.000010
1950.0	28.6	-50.0	44.9	253.4	41.6	1.000010
2000.0	28.1	-47.7	43.5	260.8	45.8	1.000010
2050.0	27.5	-45.3	42.0	262.2	48.2	1.000009
2100.0	26.9	-43.2	41.0	265.1	49.4	1.000009
2150.0	26.3	-42.4	40.2	264.0	50.7	1.000009
2200.0	25.7	-42.3	39.5	264.4	48.5	1.000009
2250.0	25.1	-44.2	38.2	264.6	45.3	1.000009
2300.0	24.6	-43.2	37.2	264.9	42.1	1.000008



STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 HRS MST  
 ASCENSION I.O. J5

UPPER AIR DATA  
 0950001058  
 S M R

GEODETIC COORDINATES  
 32.46034 LAT DEG  
 106.42307 LON DEG

GEOMETRIC ALTITUDE MSL FEET	PRESSURE MILLIBARS	TEMPERATURE AIR DEGREES	REL. HUM. PERCENT	DENSITY CM/CUBIC METER	SPEED OF SOUND KNOTS	WIND DIRECTION DEGREES(TN)	WIND DATA SPEED KNOTS	INDEX OF REFRACTION
8350.0	24.0	-42.1	30.2	592.1	204.3	36.6	1.000008	
8400.0	23.5	-41.1	35.2	593.5	202.2	28.6	1.000008	
8450.0	23.0	-40.0	34.3	594.8	258.5	20.7	1.000008	
8500.0	22.5	-39.5	33.5	595.5	250.0	13.8	1.000007	
8550.0	22.0	-40.2	32.8	594.0	255.8	16.3	1.000007	
8600.0	21.5	-40.9	32.2	593.7	225.8	19.5	1.000007	
8650.0	21.0	-41.6	31.0	592.0	218.8	23.1	1.000007	
8700.0	20.5	-42.3	31.0	591.9	219.9	26.6	1.000007	
8750.0	20.1	-43.1	30.4	590.9	223.5	30.0	1.000007	
8800.0	19.7	-43.0	29.7	591.1	220.4	33.5	1.000007	
8850.0	19.2	-42.6	29.1	591.5	225.3	36.0	1.000006	
8900.0	18.2	-42.3	28.4	591.9	228.3	35.0	1.000006	
8950.0	18.4	-42.0	27.7	592.3	228.3	33.9	1.000006	
9000.0	18.0	-41.7	27.1	592.7	228.3	32.8	1.000006	
9050.0	17.6	-41.4	26.5	593.1	228.0	32.3	1.000006	
9100.0	17.2	-41.1	25.9	593.5	227.6	32.1	1.000006	
9150.0	16.9	-40.8	25.2	593.8	227.2	31.9	1.000006	
9200.0	16.5	-40.5	24.7	594.2	227.2	31.7	1.000005	
9250.0	16.1	-40.2	24.1	594.6	228.4	31.6	1.000005	
9300.0	15.6	-39.9	23.0	595.0	227.6	31.5	1.000005	
9350.0	15.4	-39.6	23.0	595.4	230.6	31.3	1.000005	
9400.0	15.1	-39.2	22.5	595.8	230.5	32.2	1.000005	
9450.0	14.8	-38.9	22.0	596.2	230.5	33.4	1.000005	
9500.0	14.4	-38.6	21.5	596.6	229.5	34.5	1.000005	
9550.0	14.1	-38.3	21.0	597.0	230.4	35.1	1.000005	
9600.0	13.8	-38.0	20.5	597.4	234.2	34.8	1.000005	
9650.0	13.5	-37.7	20.0	597.8	237.4	34.7	1.000004	
9700.0	13.2	-37.4	19.6	598.2	241.7	34.6	1.000004	
9750.0	12.9	-37.1	19.1	598.6	247.3	33.6	1.000004	
9800.0	12.7	-36.8	18.7	599.0	253.5	32.8	1.000004	
9850.0	12.4	-36.5	18.2	599.4	260.0	32.4	1.000004	
9900.0	12.1	-36.2	17.8	599.7	264.7	31.2	1.000004	
9950.0	11.9	-35.9	17.4	600.1	268.6	28.3	1.000004	
10000.0	11.6	-35.6	17.0	600.5	269.3	25.5	1.000004	
10050.0	11.3	-35.3	16.6	600.9	272.5	22.8	1.000004	
10100.0	11.0	-35.0	16.2	601.3			1.000004	
10150.0	10.9	-34.9	15.9	601.7			1.000004	
10200.0	10.6	-34.6	15.5	602.1			1.000003	

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR 79 1130 HRS MST  
 ASCENSION NO. 58

MRN SIGNIFICANT LEVEL DATA  
 0950060056  
 S M R

GEODETIC COORDINATES  
 32.48034 LAT DEG  
 106.42307 LON DEG

GEOPOTENTIAL ALTITUDE DECAMETERS	DIRECTION DEG (TH)	WIND DATA		E-W MPS	DEW PT DFP JEG C	TEMPERATURE		PRESSURE MILLIBARS
		SPEED MPS	N-S MPS			AIR DEG C		
3107.	9999.**	9999.**	-9999.**	-9999.**	99	-34.0	1.040+1	
2958.	224.	16.	11.	11.	99	-43.2	2.000+1	
2575.	254.	8.	2.	8.	99	-39.3	2.260+1	
2483.	264.	29.	3.	25.	99	-45.5	2.580+1	
2445.	262.	25.	3.	25.	99	-45.0	2.740+1	
2386.	254.	17.	5.	17.	99	-54.3	3.000+1	
2061.	258.	21.	4.	20.	99	-50.1	5.000+1	
2049.	260.	21.	4.	20.	99	-60.0	5.100+1	
1982.	268.	24.	1.	24.	99	-59.8	5.860+1	
1862.	262.	24.	3.	24.	99	-61.6	6.660+1	
1852.	262.	24.	3.	24.	99	-64.3	7.000+1	
1756.	262.	20.	4.	23.	99	-62.5	7.740+1	
1633.	262.	37.	5.	37.	99	-66.5	1.000+2	

\*\* WIND DATA NOT COMPUTED DUE TO MISSING RAW AZIMUTH AND ELEVATION ANGLES.

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 HRS HST  
 ASCENSION NO. 58

MANDATORY LEVELS  
 0950000000  
 5 M R

GEODETIC COORDINATES  
 32.48034 LAT DEG  
 106.42307 LON DEG

PRESSURE GEOPOTENTIAL		TEMPERATURE	REL. HUM.	WIND DATA	
MILLIBARS	FEET	AIR DEGREES	PERCENT	DIRECTION DEGREES(TN)	SPEED KNOTS
850.0	5030.	14.0	20.	86.5	4.5
800.0	6624.	9.7	29.	344.5	1.4
750.0	8437.	6.1	31.	279.5	11.8
700.0	10291.	5.9	15.	250.2	18.0
650.0	12265.	1.5	13.	263.7	18.0
600.0	14350.	-3.2	19.	251.9	15.7
550.0	16597.	-8.5	20.	246.9	10.8
500.0	18995.	-14.4	21.	264.0	12.8
450.0	21591.	-21.2	21.	269.0	14.3
400.0	24395.	-28.0	21.	251.5	14.4
350.0	27498.	-34.8	21.	265.5	29.5
300.0	30971.	-42.3	21.	267.7	43.9
250.0	34943.	-50.6		260.5	50.2
200.0	39615.	-60.0		261.9	55.7
175.0	42329.	-62.0		262.0	55.4
150.0	45453.	-62.4		255.9	70.7
125.0	49135.	-63.7		258.7	71.5
100.0	53555.	-68.5		262.4	72.9
80.0	58052.	-63.0		262.1	50.7
70.0	60745.	-64.3		261.7	46.9
60.0	63650.	-60.1		267.4	46.4
50.0	67610.	-56.1		256.0	39.9
40.0	72247.	-56.4		263.1	34.3
30.0	76260.	-54.2		254.5	33.5
25.0	82224.	-44.0		264.0	45.0
20.0	87195.	-43.2		223.9	30.4
15.0	93000.	-39.2		230.5	32.3

\*\* AT LEAST ONE ASSUMED RELATIVE HUMIDITY VALUE WAS USED IN THE INTERPOLATION.

STATION ALTITUDE 3997.30 FEET MSL  
 5 APR. 79 1130 HRS MST  
 ASCENSION 10. 58

MPI, PALDATUMY LEVELS  
 09500' 050  
 S M R

GEOPCENTRAL  
 ALTITUDE  
 DECIMETERS

DIRECTION  
 DEG (TN)

SPEED  
 MPS

WIND DATA  
 N-S  
 MPS

E-W  
 MPS

DEW PT D-P  
 DEG C

TEMPERATURE  
 AIR  
 DEG C

PRESSURE  
 MILLIBARS

2855.	231.	17.	11.	13.	99	-39.2	1.500+1
2658.	224.	16.	11.	11.	99	-43.2	2.000+1
2500.	265.	23.	2.	23.	99	-44.0	2.500+1
2386.	254.	17.	5.	17.	99	-54.3	3.000+1
2202.	263.	13.	2.	16.	99	-56.4	4.000+1
2061.	258.	21.	4.	20.	99	-58.1	5.000+1
1947.	267.	24.	3.	24.	99	-60.1	6.000+1
1882.	262.	24.	3.	24.	99	-64.3	7.000+1
1769.	262.	20.	4.	20.	99	-63.0	8.000+1
1633.	262.	36.	5.	37.	99	-66.5	1.000+2
1498.	259.	37.	7.	30.	99	-63.7	1.250+2
1385.	256.	36.	9.	35.	99	-62.4	1.500+2
1290.	253.	29.	4.	28.	99	-62.0	2.000+2
1207.	262.	29.	4.	28.	99	-60.0	2.500+2
1065.	261.	20.	4.	23.	99	-50.6	3.000+2
944.	268.	25.	1.	23.	99	-42.3	3.500+2
838.	266.	15.	1.	15.	14	-34.8	4.000+2
744.	251.	7.	2.	7.	15	-28.0	4.500+2
656.	270.	7.	0.	7.	16	-21.2	5.000+2
579.	264.	7.	1.	7.	17	-14.4	5.500+2
500.	249.	0.	2.	5.	19	-8.5	6.000+2
430.	252.	0.	2.	8.	20	-3.2	6.500+2
374.	264.	0.	1.	9.	21	1.5	7.000+2
314.	250.	0.	3.	8.	22	5.9	7.500+2
257.	279.	0.	-1.	0.	16	6.1	8.000+2
204.	344.	1.	-1.	0.	17	9.7	8.500+2
153.	86.	2.	-0.	-2.	19	14.0	