

AD-A070 912


TRINITY UNIV SAN ANTONIO TX DEPT OF ENGINEERING SCIENCE F/6 14/2  
A THEORETICAL INVESTIGATION OF POWER AND CONTROL CONFIGURATIONS--ETC(U)  
MAY 79 T J JONES AFOSR-78-3622

UNCLASSIFIED

AFOSR-TR-79-0820

NL

| OF |  
AD  
A070912

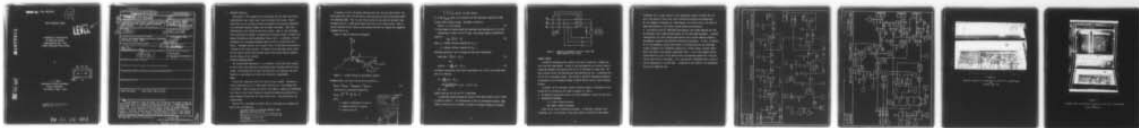

END  
DATE  
FILMED  
8-79  
DDC

AFOSR-TR-79-0820

12

FINAL TECHNICAL REPORT

LEVEL #

ADA070912

A THEORETICAL INVESTIGATION  
OF POWER AND CONTROL  
CONFIGURATIONS FOR A HIGH  
G-ONSET CENTRIFUGE DRIVE SYSTEM

BY

DDC  
RECEIVED  
JUL 9 1979  
A

DDC FILE COPY

T. J. JONES  
ENGINEERING SCIENCE DEPARTMENT  
TRINITY UNIVERSITY  
SAN ANTONIO, TEXAS 78284

Approved for public release.  
Distribution unlimited.

79 07 06 003

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER <b>AFOSR-TR-79-0820</b>	2. GOVT ACCESSION NO.	3. REPORT'S CATALOG NUMBER <b>9</b>
4. TITLE (and Subtitle) <b>A THEORETICAL INVESTIGATION OF POWER AND CONTROL CONFIGURATIONS FOR A HIGH G-ONSET CENTRIFUGE DRIVE SYSTEM</b>		5. TYPE OF REPORT & PERIOD COVERED <b>Final Technical Report June 1978 - May 1979</b>
7. AUTHOR(s) <b>T. J. Jones</b>		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS <b>Trinity University Engineering Science Department San Antonio, Texas 78284</b>		8. CONTRACT OR GRANT NUMBER(s) <b>AFOSR-78-3622</b>
11. CONTROLLING OFFICE NAME AND ADDRESS <b>Air Force Office of Scientific Research (ND) Bldg. 410 Bolling AFB, D.C. 20332</b>		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS <b>61102F 2313/D9</b>
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) <b>12 11p.</b>		12. REPORT DATE <b>22 May 1979</b>
		13. NUMBER OF PAGES <b>11</b>
		15. SECURITY CLASS. (of this report) <b>Unclassified</b>
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  <b>Approved for public release; distribution unlimited.</b>		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) <b>Human Centrifuge      High G-Onset Rates Control</b>		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) <b>An investigation of both the power drive system and the control system for high G-onset rates in a human centrifuge was carried out. Although the analysis was general, much of it specifically considered the A/F 37V-1 centrifuge at Brooks AFB. It is shown that an electric drive system, and gondola passenger control of G forces results in a system capable of simulating aerial combat maneuvers. The drive system consists of an SCR control of the A.C. line voltage applied to D.C. motors. The control system provides for cockpit stick control of the centrifuge's angular velocity and angular acceleration.</b>		

new 411 259

Handwritten initials/signature

b. RESEARCH OBJECTIVES

The purpose of the program was to investigate both the power and control configurations for a high G-onset rate centrifuge drive system. High G-onset rates as well as high G levels are necessary for realistic simulation of aerial combat maneuvers (ACMs) with the human centrifuge. Onset rate characteristics are limited by the drive systems. That is, the centrifuge drive system must be capable of supplying the necessary torque to achieve the angular acceleration and corresponding G-onset rates. In addition, for ACM simulation, the centrifuge passenger should be able to control his own G forces. Passenger control, via a control stick, of the power drive system is a purpose of the control system. An analysis of how the power drive system and the control system should operate and how they should operate together was the subject of the research.

c. STATUS OF RESEARCH EFFORT

For accurate ACM simulations, it is necessary to have both pilot control of the G forces and sufficient accelerating torque available from the drive system. Even though both of these characteristics are required, the investigation of each aspect was carried out relatively independently.

POWER

Present day technology favors all electric drive systems. Extremely accurate speed control of D.C. shunt motors from the A.C. line through SCRs is available. Metal rolling mill motors, for example, capable of withstanding two, three, or more times frequently repeated overloads can provide the required angular acceleration for high G-onset rates. Such drive motors can simulate ACMs.

The A/F 37V-1 centrifuge at Brookes AFB was considered as an example for much of the investigation.

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC)  
NOTICE OF TRANSMITTAL TO DDC  
This technical report has been reviewed and is  
approved for public release IAW AFR 190-12 (7b).  
Distribution is unlimited.  
A. D. BLOSE  
Technical Information Officer



An analysis of this centrifuge indicated that four 230 volt shunt motors, 110 horse power each with a 6X load factor could provide more than the necessary power for simulating ACMs. That is, they would provide 660 hp each for the short time necessary for six to eight G/sec onset rates from a G on G base of one. This is the  $R\omega^2$  portion of the G forces on the gondola and does not include the tangential component due to  $R\alpha$ .

Figure 1 shows the physical arrangement.

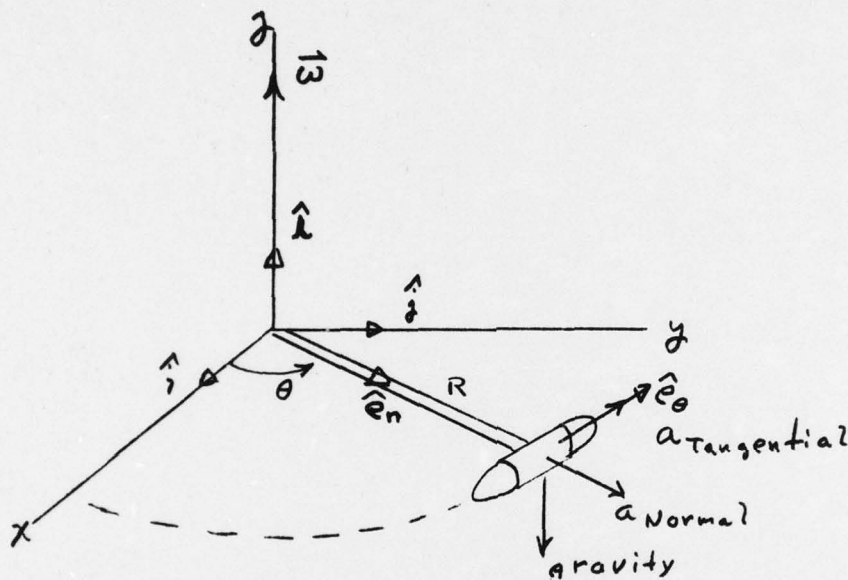


Figure 1. G forces acting on centrifuge's gondola.

Mathematically, the total G force can be expressed as:

$$\vec{G}_{total} = \vec{G}_{normal} + \vec{G}_{tangential} + \vec{G}_{gravity} \quad (1)$$

substituting in appropriate quantities.

$$G_{total} = \frac{R}{g} \omega^2 \hat{e}_n + \frac{R}{g} \alpha \hat{e}_\theta - \hat{k} \quad (2)$$

where:

$\alpha$  = angular acceleration in rad/sec<sup>2</sup>

$\omega$  = angular velocity in rad/sec

R = radius arm in ft.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/_____	
Availability Codes	
Dist	Avail and/or special
A	

$\hat{i}, \hat{j}, \hat{k}, \hat{e}_n,$  and  $\hat{e}_\theta$  are unit vectors.

It is the  $G_{\text{normal}}$  which is of interest for ACM simulation, however for high

G-onset rates  $\alpha$  must be large. The power is given as:

$$\text{power} = j \alpha \omega \text{ (ft-lb)/sec} \quad (3)$$

J is the moment of inertia about the rotational axis measured in lb.-ft.-sec<sup>2</sup>.

Considering a G-onset rate of 4 G/sec, the average angular acceleration  $\alpha$  would be:

$$\alpha_{\text{avg}} = \frac{R}{g} (\omega_4^2 - \omega_1^2) \quad (4)$$

where  $\omega_4$  = angular velocity required for  $G_n = 4$

$\omega_1$  = angular velocity required for  $G_n = 1$

Combining equations 3 and 4, giving the peak power requirement:

$$\text{peak power} = \frac{JR}{g} (\omega_4^2 - \omega_1^2) \omega_4 \quad (5)$$

and

$$\text{peak hp} = \frac{JR}{500g} (\omega_4^2 - \omega_1^2) \omega_4 \quad (6)$$

An example calculation of the power requirements for a four G per second onset rate is as follows:

$$\begin{aligned} \text{hp} &= \frac{JR}{500g} (\omega_4^2 - \omega_1^2) \omega_4 \\ &= \frac{67.3 \times 10^3 \times 20}{500 \times 32.2} \times (6.44 - 1.61) \times 2.54 \end{aligned}$$

$$\text{hp} = 1032$$

Numbers used are for the A/F 37V-1 centrifuge.

A simplified diagram showing the method of SCR speed control of D.C. motors is shown in Figure 2. For deceleration as well as acceleration control, additional circuitry can be included to provide for dynamic braking of the motor.

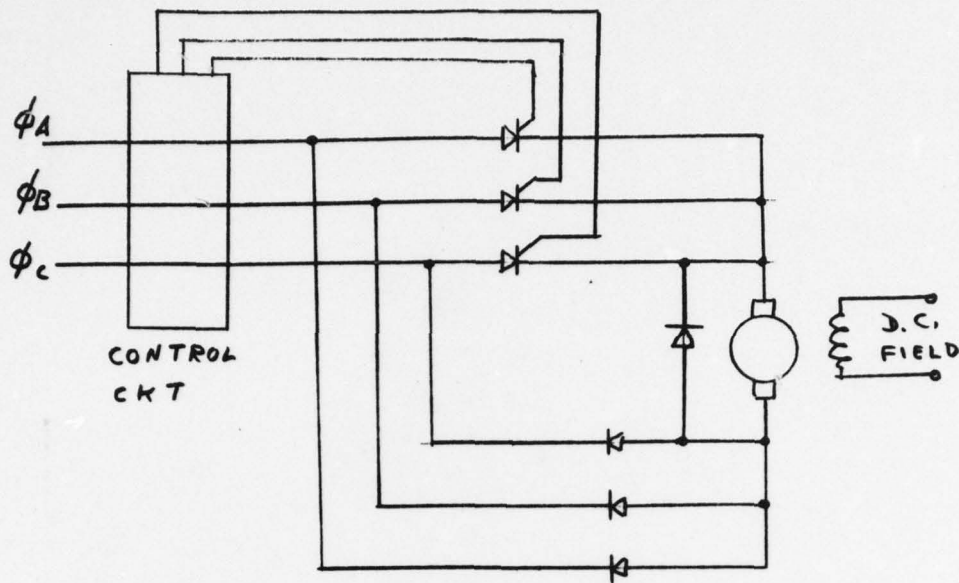


Figure 2. Simplified schematic of 34 A.C. power SCR speed control of D.C. motor

#### CONTROL SYSTEM

A system for achieving pilot control of his own G forces via a cockpit control stick was investigated. As part of the investigation an electronic control system was designed, and tested on the A/F 37V-1 centrifuge at Brooks AFB. The basic control circuit with modifications and additions has been incorporated into the A/F 37V-1 centrifuge system. This system is presently undergoing evaluation by personnel at the Biodynamics Branch at Brooks AFB for use in a pilot training program.

A schematic of the electronic system is shown in Figure 3, and photos of the system and its installation are shown in Figures 4, 5 and 6.

d. No technical publications have as yet been produced as a result of this work.

#### e. PROFESSIONAL PERSONNEL

T. J. Jones, Project Director

Mike Bomba, Student Programmer

These two are Trinity University personnel. In addition, personnel from Technology, Inc. of San Antonio, Texas participated in portions of the project.



Technology Inc. is under contract to the Biodynamics Branch at Brooks AFB, and due to the nature of their work, their limited participation was appropriate.


Mr. Roy Thompson, Technology Inc. BAFB manager, and certain of his crew made valuable contributions to the control system design and fabrication.

f. One specific area for additional investigation that became apparent was that of providing a more sophisticated display for the centrifuge passenger. A natural consideration for a more sophisticated display would involve computer graphics, and computer organized and controlled centrifuge experiments. In fact, it appears as if a microcomputer system could readily be incorporated into the centrifuge system to enhance its G simulation capabilities, monitor safety, control experiments, and analyze and organize experimental data. A real time computer control system should be a part of any modernization and updating program for a facility such as the A/F 37V-1 centrifuge. It is specifically recommended that a study of this be undertaken at an early date. A proposal to this effect is in preparation and will be submitted soon.



# AUTOMATIC CONTROL SYSTEM

Figure 3-A

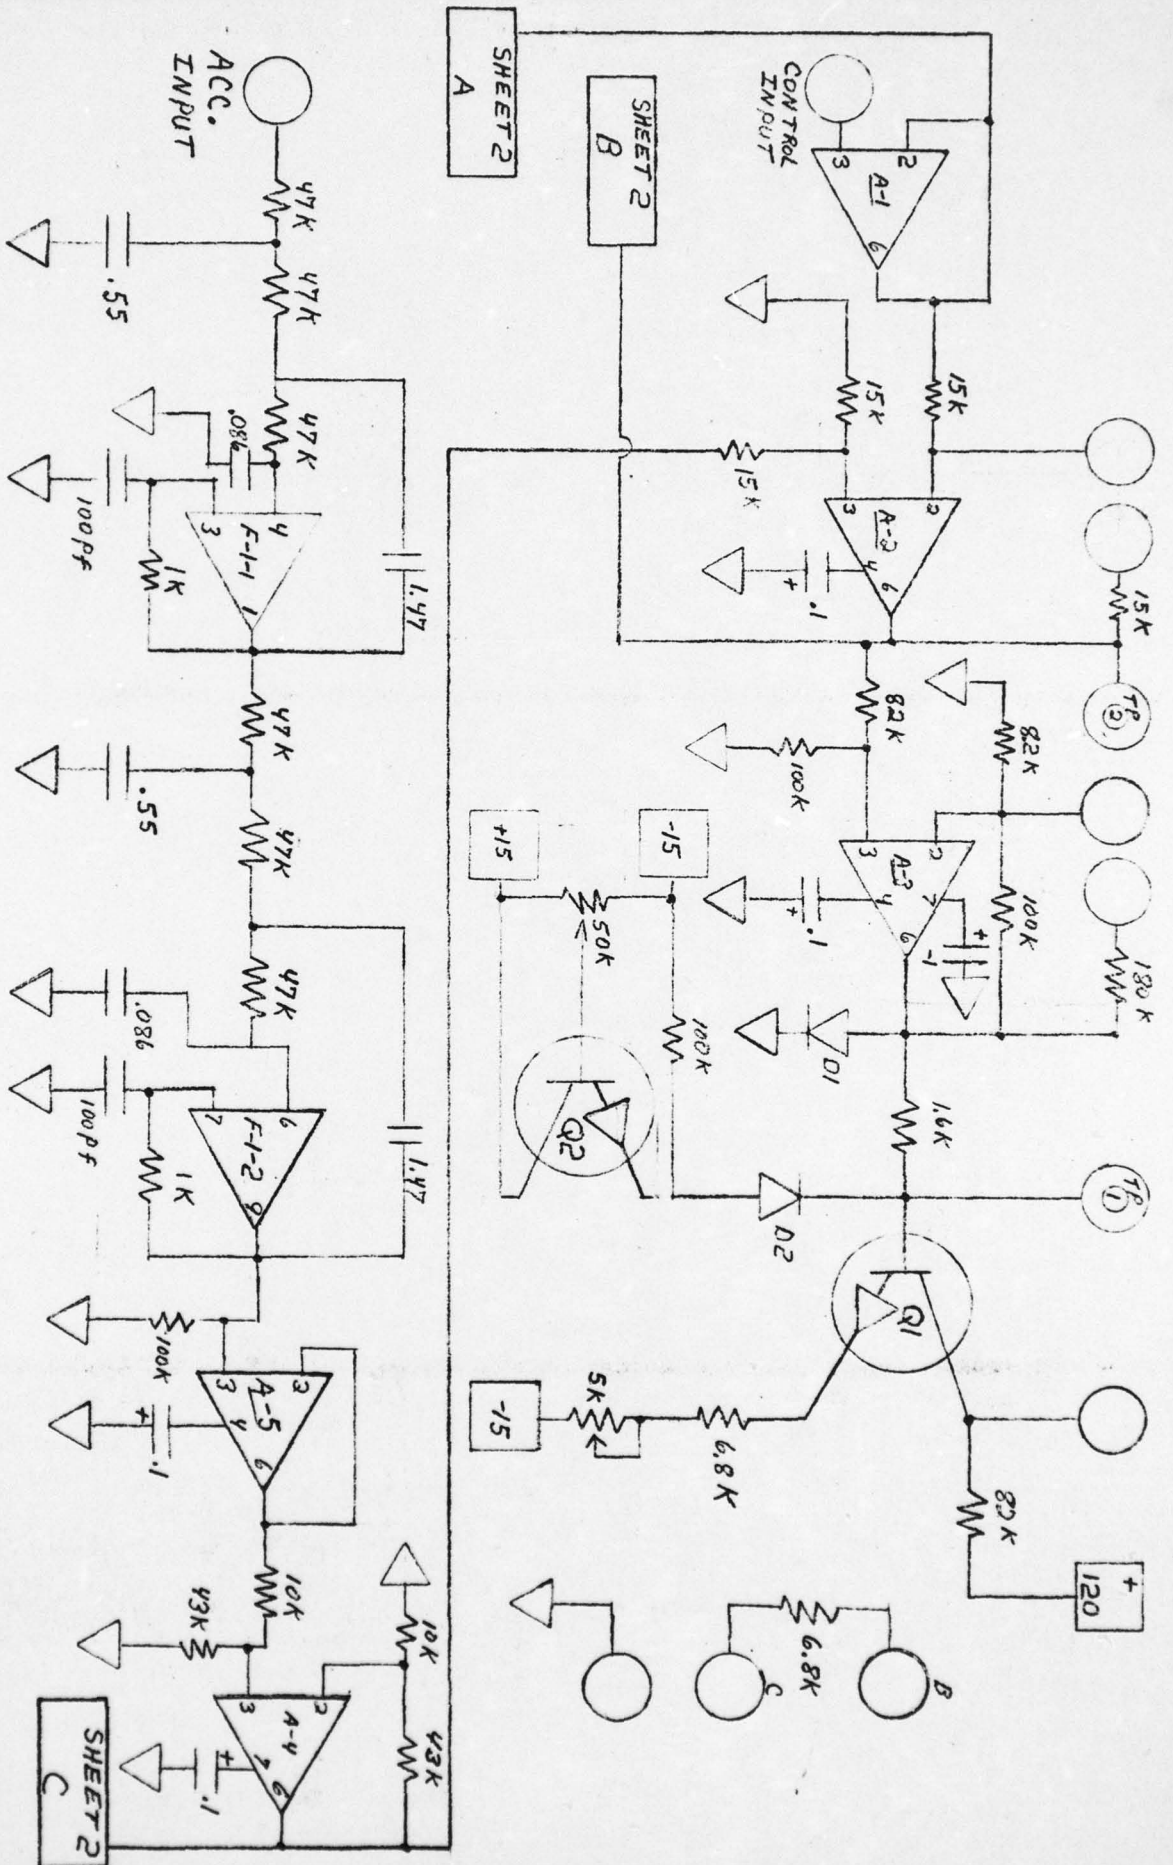



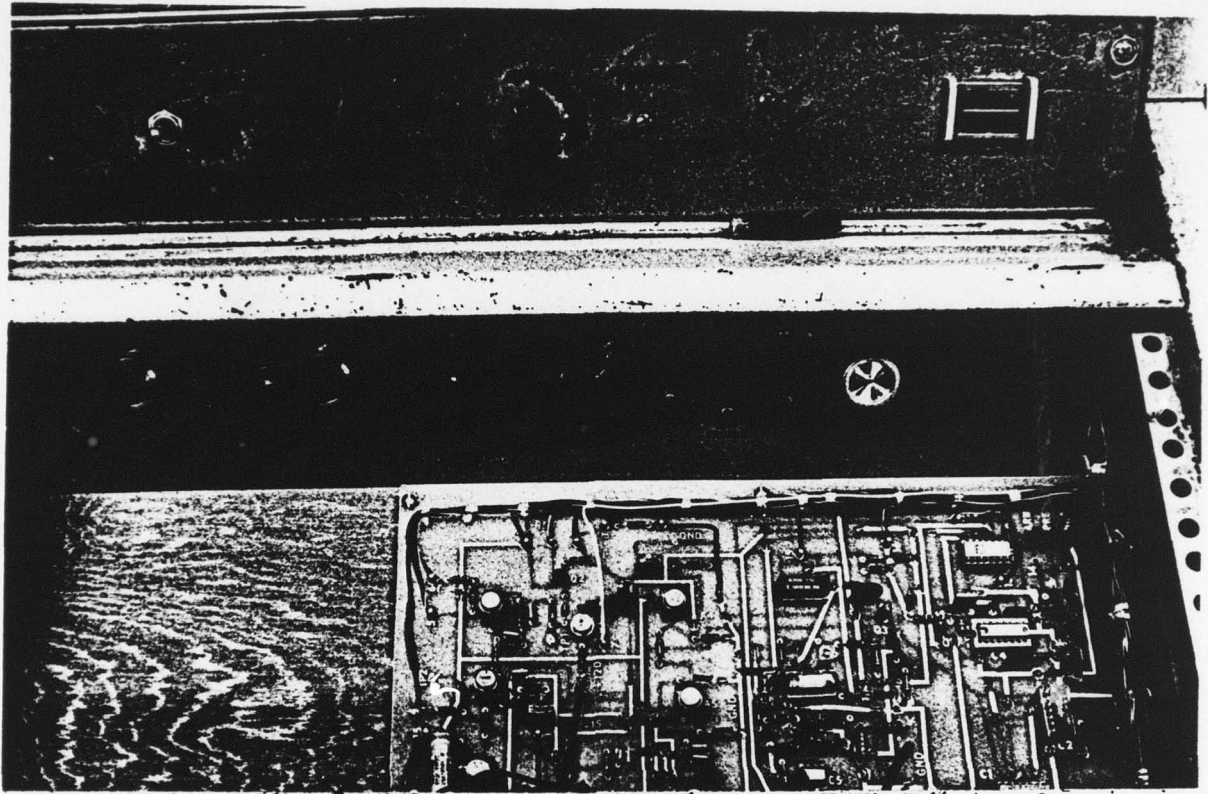


Figure 4

Control circuit as installed in A/F 37V-1 centrifuge  
at  
Brooks AFB, TX.



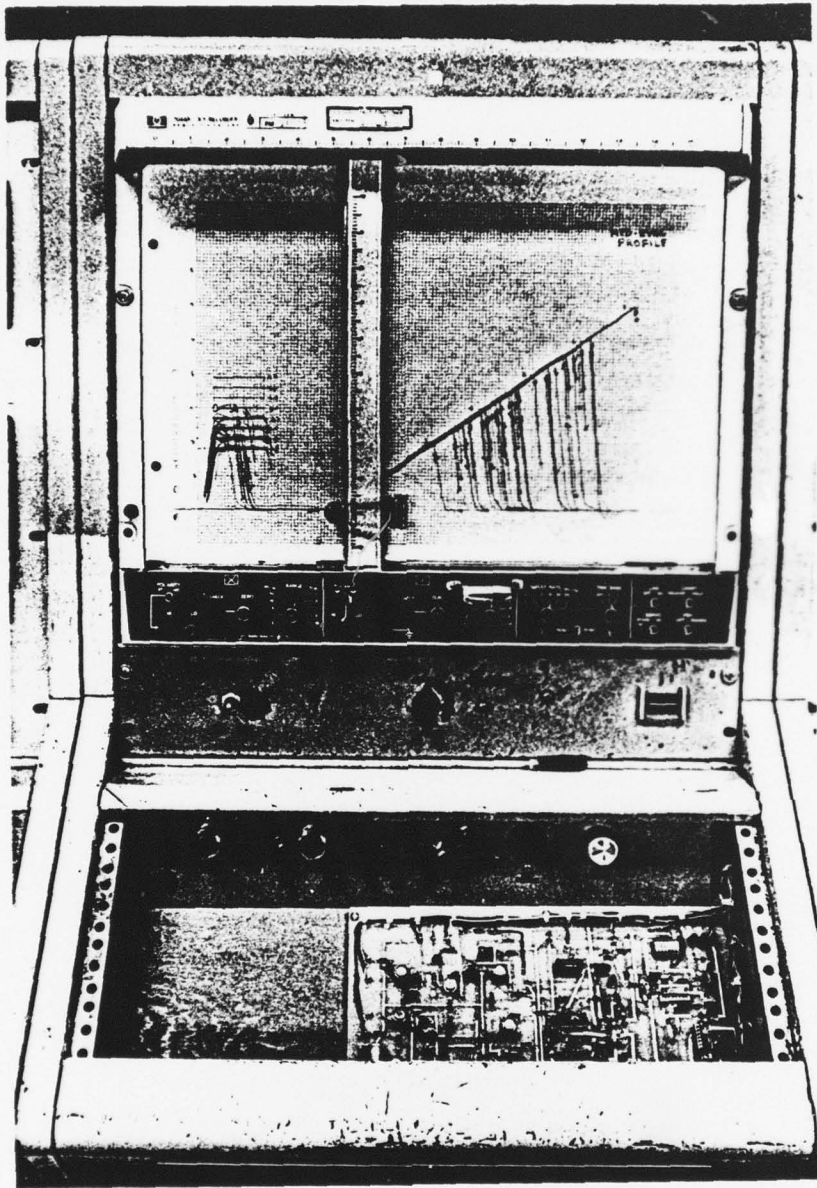


Figure 5

Another view of Control circuit on A/F 37V-1 centrifuge  
at  
Brooks AFB, TX.