

AD-A071 890

GIANNOTTI AND BUCK ASSOCIATES INC RIVERDALE MD

F/G 13/10

MOTION PREDICTIONS FOR THE CVA-59, CVA-66 AND CVAN-68. (U)

N00600-76-M-1803


JUN 77

NAVSEC-6136-77-20


NL

UNCLASSIFIED

| OF |
AD
A071B90

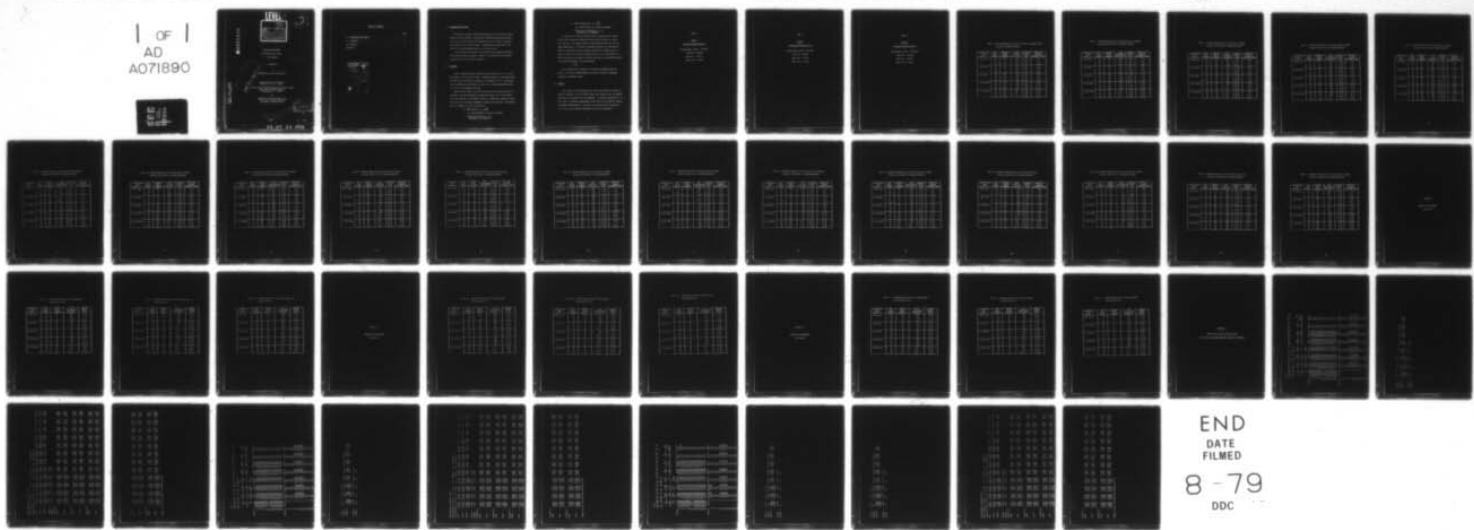

END
DATE
FILED
8-79
DDC

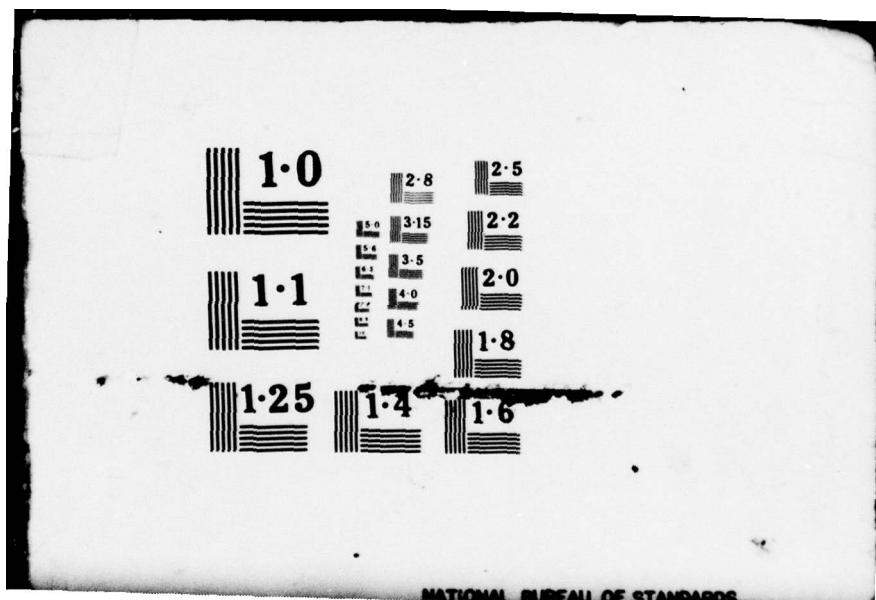

DDC FILE COPY

ADA021890

LEVEL 21
2
6


MOTION PREDICTIONS

FOR THE CVA-59, CVA-66

AND CVAN-68

11 7 JUNE 1977

12 51-P
14 NAVSEC Report No. 6136-77-20

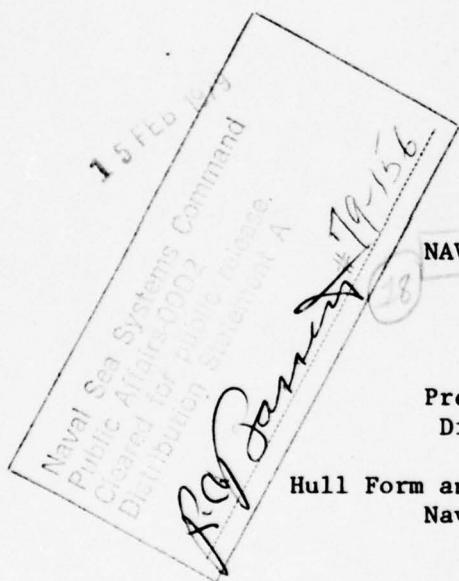


Prepared under the Technical
Direction of N. R. Fuller,

Hull Form and Fluid Dynamics Branch (Sec. 6136)
Naval Ship Engineering Center
Washington, D. C. 20362

by

Giannotti & Buck Associates, Inc.
5711 Sarvis Avenue, Suite 402
Riverdale, Maryland 20840

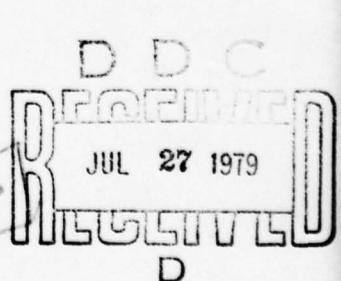

15 N 60600-76-M-1803

79 156

411 246

79 07 24 069

TABLE OF CONTENTS

	PAGE
1.0 <u>BACKGROUND AND SCOPE</u>	1
2.0 <u>APPROACH</u>	1
3.0 <u>RESULTS</u>	2

APPENDICES

Accession For	
NTIS GRA&I	X
DDC TAB	<input type="checkbox"/>
Unclassified	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By _____	
Distribution/	
Availability Codes	
Avail and/or Special	special
A	

1.0 BACKGROUND AND SCOPE

This report presents motion predictions for the aircraft carriers CVA-59, CVA-66, CVAN-68. Specifically, NAVSEA 942W requested pitch, roll and yaw rates and period information for Sea States 2 through 6 and speeds of 10, 20 and 25 knots. Furthermore headings were to be selected to yield maximum pitch, roll and yaw rates.

The predictions were made using the MITA five-degree-of-freedom ship motions computer program. Tables 1, 2 and 3 give the principal characteristics of the three carriers.

2.0 APPROACH

Motion predictions were conducted for Sea States 2, 3, 4, 5 and 6 and speeds of 10, 20 and 25 knots. Headings between 0° (following seas) and 180° (head seas) were considered in increments of 15° . The output of the program was then used to arrive at the required maximum values of rate and corresponding periods.

RMS values of pitch, roll and yaw velocities and accelerations in irregular seas were computed by taking the square root of the second and fourth moments of each mode of motion. Significant values for each rate were then calculated assuming a Rayleigh distribution. The following is a summary of these calculations:

$$1) \text{ RMS velocity} = \sigma_v = \sqrt{m_2}$$

m_2 = second moment of response spectrum

Significant velocity = $4 \sigma_v$
(Average of 1/3 highest)

$$2) \text{ RMS acceleration} = \sigma_a = \sqrt{m_4}$$

m_4 = fourth moment of response spectrum

Significant acceleration = $4 \sigma_a$
(Average of 1/3 highest)

In addition to these velocities and accelerations the average period and the period of maximum response were obtained for pitch roll and yaw. The average period is obtained directly from the program computations. The period of maximum response for each mode of motion is obtained from the response spectrum by looking up the frequency at which the specific response (pitch, roll, yaw) peaks out. These frequencies are given in rad/sec and must be converted to period in seconds according to the relationship

$$T = \frac{2\pi}{\omega}$$

For completeness, although not requested by NAVSEA 942W, the pitch, roll and yaw displacements were also recorded for headings yielding the maximum values.

3.0 RESULTS

The results of the predictions of rates and periods are given in Tables 4 through 9 for the CVA-59; Tables 10 through 15 for the CVA-66; and Tables 16 through 21 for the CVAN-68. In addition Appendices A, B and C give the angular displacement predictions for the CVA-59, CVA-66 and CVAN-68 respectively. The input to the MITA motions program for each of the three carriers considered is given in Appendix D.

Table 1

CVA-59

Principal Characteristics

Displacement (tons) - 76740.00

LBP (ft) - 990.00

Beam (ft) - 129.33

Draft (ft) - 36.00

Table 2

CVA-66

Principal Characteristics

Displacement (tons) - 81711.00

LBP (ft) - 990.00

Beam (ft) - 129.33

Draft (ft) - 37.08

Table 3

CVAN-68

Principal Characteristics

Displacement (tons) - 91440.00

LBP (ft) - 1040.00

Beam (ft) - 134.00

Draft (ft) - 36.83

Table 4 CVA-59 Significant Pitch Velocities, Average Periods,
Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.067	7.63	5.27
	20	0	.153	2.70	4.40
	25	45	.075	3.21	4.29
4.90 (SS3)	10	60	.147	8.44	6.35
	20	0	.142	4.06	5.09
	25	90	.110	6.15	6.97
6.50 (SS4)	10	60	.234	9.45	8.80
	20	90	.168	6.76	7.16
	25	90	.156	6.57	7.04
10.20 (SS5)	10	135	.541	8.77	11.00
	20	135	.498	7.90	11.75
	25	135	.453	7.55	11.75
16.90 (SS6)	10	135	1.60	9.89	11.81
	20	135	1.77	8.86	12.50
	25	135	1.77	8.50	12.44

Table 5 CVA-59 Significant Pitch Accelerations, Average Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.080	5.06	5.45
	20	0	.846	2.70	4.40
	25	45	.360	3.21	4.29
4.90 (SS3)	10	90	.142	6.45	6.97
	20	0	.565	4.06	5.09
	25	30	.256	7.58	5.77
6.50 (SS4)	10	90	.198	6.98	7.35
	20	90	.168	6.76	7.16
	25	30	.184	10.78	6.12
10.20 (SS5)	10	135	.407	8.77	11.00
	20	135	.414	7.90	11.75
	25	135	.395	7.55	11.75
16.90 (SS6)	10	135	1.06	9.89	11.81
	20	135	1.30	8.86	12.50
	25	135	1.35	8.50	12.50

Table 6 CVA-59 Significant Roll Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.045	8.17	6.85
	20	60	.184	11.16	4.40
	25	60	.220	18.81	5.45
4.90 (SS3)	10	60	.155	9.20	6.97
	20	45	.797	21.60	6.97
	25	60	.573	18.70	6.97
6.50 (SS4)	10	60	.236	9.49	7.16
	20	45	1.45	20.66	7.35
	25	60	.867	18.13	7.03
10.20 (SS5)	10	60	.503	10.93	11.00
	20	45	2.57	19.97	7.85
	25	60	1.53	17.69	7.35
16.90 (SS6)	10	60	1.26	14.11	13.51
	20	45	5.32	20.36	13.51
	25	60	4.13	19.14	15.14

Table 7 CVA-59 Significant Roll Accelerations, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.043	4.68	5.10
	20	30	.340	6.08	5.10
	25	45	.373	14.25	5.45
4.90 (SS3)	10	60	.155	9.20	6.97
	20	45	.308	21.60	6.97
	25	60	.279	18.70	6.97
6.50 (SS4)	10	60	.176	9.49	7.16
	20	45	.465	20.66	7.35
	25	60	.327	18.13	7.03
10.20 (SS5)	10	60	.304	10.93	11.00
	20	45	.820	19.97	7.85
	25	60	.550	17.69	7.35
16.90 (SS6)	10	60	.600	14.11	13.51
	20	45	1.65	20.36	13.51
	25	60	1.37	19.14	15.14

Table 8 CVA-59 Significant Yaw Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.056	4.32	5.46
	20	45	.478	4.64	4.17
	25	90	.056	4.31	5.27
4.90 (SS3)	10	90	.092	5.41	6.23
	20	45	.412	6.70	4.70
	25	90	.090	5.35	6.11
6.50 (SS4)	10	90	.116	6.02	7.04
	20	45	.336	9.13	5.03
	25	60	.128	17.27	9.36
10.20 (SS5)	10	60	.296	11.85	10.00
	20	60	.338	14.78	9.68
	25	60	.355	17.11	9.68
16.90 (SS6)	10	60	.681	13.07	11.37
	20	60	.729	15.64	11.12
	25	60	.731	17.55	10.93

Table 9 CVA-59 Significant Yaw Accelerations, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.098	4.32	5.46
	20	45	1.71	4.64	4.17
	25	45	.139	32.83	5.27
4.90 (SS3)	10	90	.126	5.41	6.22
	20	45	1.01	6.70	4.70
	25	90	.126	5.35	6.11
6.50 (SS4)	10	90	.141	6.02	7.04
	20	45	.572	9.13	5.03
	25	90	.140	5.96	6.91
10.20 (SS5)	10	90	.162	6.96	8.11
	20	45	.178	17.22	10.49
	25	135	.160	6.67	11.00
16.90 (SS6)	10	60	.337	13.07	11.37
	20	135	.358	8.47	12.50
	25	135	.372	7.95	12.50

Table 10 CVA-66 Significant Pitch Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH VELOCITY (DEC/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.067	7.64	5.27
	20	0	.157	2.72	4.40
	25	45	.081	3.20	4.29
4.90 (SS3)	10	60	.147	8.44	6.97
	20	0	.146	4.08	5.09
	25	90	.103	6.23	6.97
6.50 (SS4)	10	60	.234	9.44	8.80
	20	90	.160	6.86	7.16
	25	90	.147	6.67	7.16
10.20 (SS5)	10	135	.531	8.82	11.00
	20	135	.478	7.95	11.75
	25	135	.432	7.60	12.51
16.90 (SS6)	10	135	1.60	9.92	11.81
	20	135	1.73	8.91	12.50
	25	135	1.73	8.55	12.50

Table 11 CVA-66 Significant Pitch Accelerations, Average Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.073	5.07	5.10
	20	0	.869	2.72	4.40
	25	45	.386	3.20	4.29
4.90 (SS3)	10	90	.133	6.53	6.97
	20	0	.581	4.08	5.09
	25	45	.248	5.81	7.29
6.50 (SS4)	10	90	.188	7.07	7.35
	20	0	.380	5.75	9.36
	25	45	.156	10.59	7.73
10.20 (SS5)	10	135	.396	8.82	11.00
	20	135	.394	7.95	11.75
	25	135	.374	7.60	12.57
16.90 (SS6)	10	135	1.05	9.92	11.81
	20	135	1.27	8.91	12.50
	25	135	1.32	8.55	12.50

Table 12 CVA-66 Significant Roll Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.042	8.16	6.85
	20	60	.182	10.94	4.28
	25	60	.179	17.02	5.71
4.90 (SS3)	10	60	.163	9.23	6.97
	20	45	.661	23.06	6.97
	25	60	.473	18.13	6.97
6.50 (SS4)	10	60	.263	9.51	7.35
	20	45	1.15	21.42	7.35
	25	60	.738	17.70	7.03
10.20 (SS5)	10	60	.484	10.67	11.00
	20	30	2.04	23.96	8.68
	25	45	1.69	25.83	8.67
16.90 (SS6)	10	60	1.08	13.67	12.88
	20	30	4.47	23.59	9.86
	25	45	4.58	24.11	12.06

Table 13 CVA-66 Significant Roll Accelerations, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	135	.034	4.17	5.45
	20	60	.333	10.94	4.28
	25	45	.381	15.60	5.45
4.90 (SS3)	10	60	.106	9.53	6.97
	20	45	.296	23.06	6.97
	25	45	.275	30.71	8.17
6.50 (SS4)	10	60	.176	9.51	7.35
	20	45	.372	21.42	7.35
	25	60	.288	17.70	7.03
10.20 (SS5)	10	60	.297	10.67	11.00
	20	30	.566	23.96	8.68
	25	60	.468	17.44	7.35
16.90 (SS6)	10	60	.534	13.67	12.88
	20	45	1.23	20.58	15.14
	25	45	1.20	24.11	12.06

Table 14 CVA-66 Significant Yaw Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.054	4.33	5.24
	20	45	.496	4.64	5.95
	25	90	.054	4.20	5.24
4.90 (SS3)	10	90	.088	5.41	6.21
	20	45	.428	6.68	4.89
	25	90	.087	5.35	6.11
6.50 (SS4)	10	90	.112	6.02	6.91
	20	45	.348	9.05	5.03
	25	60	.126	17.21	8.80
10.20 (SS5)	10	60	.292	11.87	10.00
	20	60	.335	14.80	10.00
	25	60	.353	17.13	9.68
16.90 (SS6)	10	60	.679	13.10	11.56
	20	60	.731	15.68	11.12
	25	60	.740	17.59	10.93

Table 15 CVA-66 Significant Yaw Accelerations, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.094	4.33	5.24
	20	45	1.78	4.64	5.95
	25	45	.140	32.80	5.24
4.90 (SS3)	10	90	.121	5.41	6.23
	20	45	1.05	6.68	4.89
	25	90	.122	5.35	6.11
6.50 (SS4)	10	90	.135	6.02	6.91
	20	45	.593	9.05	5.03
	25	90	.134	5.95	6.91
10.20 (SS5)	10	60	.136	11.87	10.00
	20	45	.183	17.12	10.56
	25	135	.157	6.69	11.00
16.90 (SS6)	10	60	.335	13.10	11.56
	20	135	.355	8.50	12.44
	25	135	.368	7.98	12.50

Table 16 CVAN-68 Significant Pitch Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.059	7.63	5.27
	20	0	.147	2.97	4.61
	25	45	.111	3.37	4.52
4.90 (SS3)	10	60	.130	8.43	6.35
	20	0	.139	4.68	5.60
	25	30	.097	7.14	5.87
6.50 (SS4)	10	60	.199	9.39	8.80
	20	90	.154	7.01	7.35
	25	90	.142	6.85	7.35
10.20 (SS5)	10	60	.454	11.33	10.00
	20	135	.377	8.05	11.75
	25	135	.346	7.64	11.75
16.90 (SS6)	10	135	1.33	10.13	12.50
	20	135	1.45	9.09	12.50
	25	135	1.44	8.69	12.88

Table 17 CVAN-68 Significant Pitch Accelerations, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.068	5.09	5.45
	20	0	.794	2.97	4.61
	25	45	.523	3.37	4.52
4.90 (SS3)	10	90	.122	6.57	7.29
	20	0	.538	4.68	5.60
	25	45	.340	5.51	7.29
6.50 (SS4)	10	90	.178	7.15	7.48
	20	0	.356	6.36	6.12
	25	30	.270	10.13	6.28
10.20 (SS5)	10	90	.266	7.73	8.11
	20	135	.306	8.05	11.75
	25	135	.299	7.64	11.75
16.90 (SS6)	10	135	.861	10.13	12.50
	20	135	1.04	9.09	12.50
	25	135	1.08	8.69	12.88

Table 18 CVAN-68 Significant Roll Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.052	7.70	6.84
	20	30	.255	3.57	4.40
	25	45	.175	5.68	5.45
4.90 (SS3)	10	60	.145	9.09	7.29
	20	45	.381	21.31	7.29
	25	60	.304	17.16	7.29
6.50 (SS4)	10	60	.252	9.48	7.35
	20	45	.776	20.11	8.36
	25	60	.546	17.01	7.35
10.20 (SS5)	10	60	.480	10.76	7.67
	20	45	1.59	19.51	8.48
	25	60	1.15	17.22	7.67
16.90 (SS6)	10	60	1.18	14.17	13.51
	20	45	3.64	20.20	13.51
	25	60	3.34	18.95	14.20

Table 19 CVAN-68 Significant Roll Accelerations, Average Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	60	.044	7.70	6.84
	20	30	1.17	3.57	4.40
	25	45	.733	5.68	5.45
4.90 (SS3)	10	60	.103	9.09	7.29
	20	30	.756	10.71	8.80
	25	45	.520	20.59	8.80
6.50 (SS4)	10	60	.170	9.48	7.35
	20	30	.481	21.39	8.80
	25	45	.366	26.29	8.36
10.20 (SS5)	10	60	.294	10.76	7.67
	20	45	.516	19.51	8.48
	25	60	.423	17.22	7.67
16.90 (SS6)	10	60	.564	14.17	13.51
	20	45	1.14	20.20	13.51
	25	60	1.12	18.95	14.20

Table 20 CVAN-68 Significant Yaw Velocities, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW VELOCITY (DEG/SEC)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	45	.050	10.53	4.52
	20	45	.846	4.58	4.17
	25	60	.106	6.52	4.29
4.90 (SS3)	10	90	.084	5.62	6.35
	20	45	.727	6.39	4.70
	25	60	.094	10.38	8.73
6.50 (SS4)	10	90	.110	6.31	7.35
	20	45	.584	8.46	4.86
	25	60	.106	15.15	9.36
10.20 (SS5)	10	60	.233	12.02	10.49
	20	45	.362	15.40	11.00
	25	60	.281	17.25	9.99
16.90 (SS6)	10	60	.594	13.41	11.81
	20	60	.640	15.94	11.37
	25	60	.642	17.77	11.12

Table 21 CVAN-68 Significant Yaw Accelerations, Average
Periods, and Periods of Maximum Response

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW ACCELERATION (DEG/SEC ²)	AVERAGE PERIOD (SEC)	PERIOD OF MAXIMUM RESPONSE (SEC)
3.02 (SS2)	10	90	.088	4.38	5.45
	20	45	3.03	4.58	4.17
	25	60	.314	6.52	4.29
4.90 (SS3)	10	90	.110	5.62	6.35
	20	45	1.78	6.39	4.69
	25	45	.217	25.00	5.99
6.50 (SS4)	10	90	.126	6.31	7.35
	20	45	1.01	8.46	4.86
	25	45	.149	31.53	6.47
10.20 (SS5)	10	135	.159	8.05	11.00
	20	45	.296	15.40	11.00
	25	135	.155	6.78	11.00
16.90 (SS6)	10	135	.333	9.73	12.06
	20	135	.370	8.57	12.50
	25	135	.377	8.11	12.50

APPENDIX A

ANGULAR DISPLACEMENTS

FOR CVA-59

Table A.1 CVA-59 Significant Pitch Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	60	.082	7.63
	20	0	.066	2.70
	25	60	.048	14.76
4.90 (SS3)	10	60	.198	8.44
	20	60	.150	13.81
	25	60	.123	17.95
6.50 (SS4)	10	60	.352	9.45
	20	60	.280	13.98
	25	60	.249	17.29
10.20 (SS5)	10	60	.942	11.21
	20	60	.804	14.76
	25	60	.749	17.20
16.90 (SS6)	10	135	2.52	9.89
	20	135	2.49	8.86
	25	135	2.39	8.50

Table A.2 CVA-59 Significant Roll Displacement and Average Periods

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	60	.059	8.17
	20	45	.696	24.77
	25	60	.658	18.81
4.90 (SS3)	10	60	.226	9.20
	20	45	2.74	21.60
	25	60	1.71	18.70
6.50 (SS4)	10	60	.397	9.49
	20	45	4.75	20.66
	25	60	2.50	18.13
10.20 (SS5)	10	45	.896	12.00
	20	45	8.16	19.97
	25	45	5.07	26.38
16.90 (SS6)	10	60	2.82	14.11
	20	45	17.24	20.36
	25	60	12.58	19.14

Table A.3 CVA-59 Significant Yaw Displacement and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	90	.038	4.32
	20	45	.353	4.64
	25	45	.265	32.83
4.90 (SS3)	10	90	.079	5.41
	20	45	.440	6.70
	25	45	.612	47.96
6.50 (SS4)	10	60	.157	10.33
	20	45	.488	9.13
	25	45	.834	46.94
10.20 (SS5)	10	60	.549	11.85
	20	60	.794	14.78
	25	45	1.33	33.10
16.90 (SS6)	10	60	1.42	13.07
	20	60	1.82	15.64
	25	45	2.64	25.71

Appendix B

ANGULAR DISPLACEMENTS

FOR CVA-66

Table B.1 CVA-66 Significant Pitch Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	60	.082	7.64
	20	0	.068	2.72
	25	60	.053	13.67
4.90 (SS3)	10	60	.198	8.44
	20	60	.154	13.81
	25	60	.129	17.76
6.50 (SS4)	10	60	.351	9.44
	20	60	.282	13.99
	25	60	.250	17.32
10.20 (SS5)	10	60	.940	11.21
	20	60	.800	14.77
	25	60	.744	17.22
16.90 (SS6)	10	135	2.52	9.92
	20	135	2.47	8.91
	25	135	2.36	8.55

Table B.2 CVA-66 Significant Roll Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	60	.055	8.16
	20	45	.778	27.47
	25	60	.489	17.02
4.90 (SS3)	10	60	.225	9.23
	20	45	2.42	23.06
	25	60	1.37	18.13
6.50 (SS4)	10	60	.398	9.51
	20	45	3.93	21.42
	25	45	2.60	28.69
10.20 (SS5)	10	45	.882	11.96
	20	30	8.16	23.96
	25	45	6.93	25.83
16.90 (SS6)	10	60	2.34	13.67
	20	30	16.82	23.59
	25	45	17.56	24.11

Table B.3 CVA-66 Significant Yaw Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	90	.037	4.33
	20	45	.366	4.64
	25	45	.269	32.80
4.90 (SS3)	10	90	.076	5.41
	20	45	.455	6.68
	25	45	.621	48.08
6.50 (SS4)	10	60	.154	10.34
	20	45	.501	9.05
	25	45	.842	47.37
10.20 (SS5)	10	60	.552	11.87
	20	60	.789	14.80
	25	45	1.34	33.33
16.90 (SS6)	10	60	1.41	13.10
	20	60	1.83	15.68
	25	45	2.68	25.67

APPENDIX C

ANGULAR DISPLACEMENTS

FOR CVAN-68

Table C.1 CVAN-68 Significant Pitch Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	PITCH DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	60	.072	7.63
	20	60	.070	13.52
	25	60	.065	11.21
4.90 (SS3)	10	60	.174	8.43
	20	60	.149	13.86
	25	60	.137	16.72
6.50 (SS4)	10	60	.297	9.39
	20	60	.247	14.05
	25	60	.229	17.44
10.20 (SS5)	10	60	.819	11.33
	20	60	.703	14.86
	25	60	.666	17.33
16.90 (SS6)	10	135	2.15	10.13
	20	135	2.10	9.09
	25	135	1.99	8.69

Table C.2 CVAN-68 Significant Roll Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	ROLL DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	45	.078	10.64
	20	60	.334	10.31
	25	60	.217	14.75
4.90 (SS3)	10	60	.211	9.09
	20	45	1.29	21.31
	25	60	.831	17.16
6.50 (SS4)	10	60	.380	9.48
	20	45	2.48	20.11
	25	45	1.70	26.29
10.20 (SS5)	10	60	.822	10.76
	20	45	4.93	19.51
	25	45	4.33	25.74
16.90 (SS6)	10	60	2.66	14.17
	20	45	11.70	20.20
	25	45	10.71	24.28

Table C.3 CVAN-68 Significant Yaw Displacement
and Average Period

SIGNIFICANT WAVE HEIGHT, FT.	SHIP SPEED (KNOTS)	HEADING ANGLE (DEGREES)	YAW DISPLACEMENT (DEGREES)	AVERAGE PERIOD (SEC)
3.02 (SS2)	10	45	.083	10.53
	20	45	.617	4.58
	25	45	.134	11.11
4.90 (SS3)	10	45	.120	10.21
	20	45	.740	6.39
	25	45	.325	25.00
6.50 (SS4)	10	45	.146	10.23
	20	45	.786	8.64
	25	45	.446	31.53
10.20 (SS5)	10	60	.446	12.02
	20	45	.888	15.40
	25	45	.834	28.42
16.90 (SS6)	10	60	1.27	13.41
	20	60	1.62	15.94
	25	45	2.10	24.49

APPENDIX D

**INPUT TO MITA SHIP MOTIONS PROGRAM
FOR EACH OF THE THREE AIRCRAFT CARRIERS CONSIDERED**

三一

UPR(N)	:	16.8500	12.7500	42.2500		
BETA(M)	:	0.0	30.0000	45.0000	60.0000	90.0000
OMEGA(L)	:	4.0000	3.0000	2.5000	2.3500	2.2000
		1.8000	1.7000	1.6000	1.5500	1.5000
		1.1000	1.0000	0.9000	0.8500	0.8000
		0.5000	0.2500	0.1000	0.0500	0.0250
H13(NW)	:	2.0200	4.9000	5.5000	10.2000	16.5000
OMP(NW)	:	0.0	0.0	0.0	0.0	0.0

MANIPULATIONS IN SURROGATE CHECK :

FORM PARAMETERS YIELDING : CH = 0.5024	XFC = -19.2000	WGT = 0.1714081E-09		
STATION PARAMETERS YIELDING : CR = 0.5001	LCA = -18.6096	WGT = 0.1741571E-09		
DX(L) : 49.5000 49.5000 49.5000 49.5000	49.5000 49.5000 49.5000 49.5000	49.5000 49.5000 49.5000 49.5000	49.5000	49.5000
STA SPA : 24.7500 49.5000 49.5000 49.5000	49.5000 49.5000 49.5000 49.5000	49.5000 49.5000 49.5000 49.5000	49.5000	49.5000
OMEGA(L) : 0.2259 0.2609 0.2649 0.2649	0.2858 0.2948 0.3963 0.4125	0.3046 0.3118 0.4308 0.4510	0.3195 0.3278 0.5052 0.5401	0.3466 0.3572 0.5833 0.6390
H13(NW) : 3.0700 4.0000 4.0242 4.0242	6.5000 10.2000 0.8928 0.7177	16.9000 0.5537		
OMP(NW) : 1.2028 1.0242 1.0242 1.0242				
SPECTRUM # 1				
SPUMS : 0.7854 1.3360 1.6646 3.5263	0.8513 1.3621 2.0056 3.6673	0.9168 1.3882 2.2266 3.7983	1.0478 1.4276 2.4885 3.9203	1.1002 1.5062 2.6195 2.7505
SPCTM : 0.0011P 0.5211 0.2230 0.011-P	0.0171 0.6144 0.1715 0.0124	0.0710 0.5934 0.1920 0.0104	0.1745 0.5579 0.1022 0.0088	0.4226 0.5294 0.0629 0.0500
SPECTRUM # 2				
SPUMS : 0.6163 1.0498 1.5424 2.7763	0.6494 1.0604 1.6452 2.8741	0.7198 1.0599 1.7480 2.9819	0.7712 1.1203 1.8508 3.0847	0.8226 1.1516 1.9537 2.0565
SPCTM : 0.0061 2.0827 0.7507 0.0497	0.0572 2.0503 0.5751 0.0415	0.2580 2.0259 0.4425 0.0350	0.5017 1.052P 0.4425 0.0296	0.9049 1.1825 1.0429 0.2109
SPECTRUM # 3				
SPUMS : 0.5257 0.9106 1.3391 2.4105	0.5903 0.9285 1.4284 2.4997	0.6249 0.9463 1.5177 2.5890	0.7142 0.9090 1.6070 2.6783	0.7499 1.0267 1.6963 1.7855
SPCTM : 0.0123 4.2210 1.5214 0.1607	0.1159 4.1757 1.1655 0.0842	0.4824 4.1059 0.8965 0.0708	1.1997 3.0648 0.8969 0.0700	1.1337 3.7015 0.5480 0.5426

SPC TRIM # 2	
SPOMS :	0.4274 0.7269 1.0690 1.3242
	0.4489 0.7417 1.1403 1.4655
	0.5701 0.7087 1.3641 2.1290
	0.5487 0.8196 1.4254 1.4966
	0.4272 0.6552 1.5470 1.5470
	0.6465 0.8908 1.6307 1.7104
	0.6842 0.9621 1.7617 1.8530
	0.7127 1.0334 1.8517 1.8530

SPC TRIM # 5	
SPOMS :	0.0380 1.3020s 4.6222 9.3108
	0.2576 12.8709 3.5052 0.6207
	0.4093 12.7304 2.7664 0.2185
	6.5916 11.6967 1.1432 0.1940
	8.8590 10.0969 1.3185 0.8202
	10.7524 10.0334 1.0475 0.8770
	11.8114 8.9567 0.8202 0.6770
	12.5372 7.0317 0.8202 0.6770
	13.0157 6.1264 0.4524 0.3736
	13.0704 5.3643 0.4524 0.3736

SPC TRIM # 5

SPOMS :	
0.2327 0.5647 0.8205 1.4940	0.3849 0.5759 0.6859 1.5503
	0.4153 0.4035 0.0066 1.6610
	0.4429 0.6367 1.1073 1.6610
	0.4451 0.6367 1.1073 1.6610
	0.4872 0.6444 1.1627 1.2181
	0.5038 0.6921 1.2181 1.2794
	0.5215 0.7170 1.3218 1.3842
	0.5426 0.7751 1.3842 1.4395

SPC TRIM # 5	
SPOMS :	0.1342 46.0092 16.5837 1.0973
	1.2637 45.5155 12.7039 0.9179
	5.2587 44.7548 9.7753 0.7722
	13.0719 43.2173 7.5735 0.6532
	23.2573 41.3213 5.9149 3.7014
	31.3039 30.2180 4.6590 3.7014
	37.9944 35.4540 4.6590 3.7014
	41.7372 31.6565 2.9654 2.3052
	44.3012 28.0773 2.9654 2.3052
	45.3792 24.6713 1.0414 1.5967
	46.1653 18.9550 1.3202 1.5967

CHANGES (IF ANY) IN STATION FORM PARAMETERS FOLLOW

CVA 66

	NSPA	NSPMS	NSFNC	NVL NMMT	NSP	No	MD	NTUFA	MASSFA	NA	NPEND	NAT	NPCH	NPCN	NPCL
21	27	7	3	0	0	15	0	0	1	0	0	0	0	0	0
NSPA	NSPA	NSPMS	NS	NSPC	In	NA	NP	NEVT							
2	5	0	0	1	0	0									
CR	XLEP	REAM	DRAFT	SPAV	32.1700	-20.9000	XCC	VCC	GM						
0.6023	990.0000	129.3300	37.0800							10.4200	9.4000				
PYV	RXX	R7Z	X7I	RHD			XPH	NJ	WCIRFA						
247.5000	59.1600	247.5000	0.0	1.000005	1.000005	1.000005	0.000005	0.000005	0.000005	0.000005	0.000005	130.844.10			
UNIT	ORIGIN	ZFTAA	ALFA												
0	-20.9000	10.0000	0.0000												
STATION	XIII	YM(I)	ZM(I)	SIGMA(I)	ZCR(I)	GIRTH(I)	RIFR(I)	ALPH(I)							
1	495.0000	0.0	0.0	0.0	0.0	0.0	0.0	0.0	6.5000	0.0	0.0				
2	445.5000	15.7800	37.0900	1.0692	-17.8500	85.3200	0.0	0.0							
3	396.0000	33.0600	37.0800	0.8655	-16.6500	94.2000	0.0	0.0							
4	346.5000	51.3400	37.0800	0.8184	-16.3100	107.5000	0.0	0.0							
5	297.0000	70.9000	37.0800	0.8091	-16.2600	120.0000	0.0	0.0							
6	247.5000	89.2600	37.0800	0.8187	-16.4200	137.4000	0.0	0.0							
7	198.0000	104.4600	37.0800	0.8447	-16.4900	150.3200	0.0	0.0							
8	148.5000	115.9000	37.0800	0.8854	-16.8700	164.3400	0.0	0.0							
9	99.0000	123.3800	37.0800	0.9209	-17.0900	175.6000	0.0	0.0							
10	49.5000	127.2600	37.0800	0.9549	-17.3300	185.0400	0.0	0.0							
11	0.0	128.9800	37.0800	0.9852	-17.5900	195.2800	0.0	0.0							
12	-49.5000	129.2400	37.0800	1.0010	-17.9700	195.0000	0.0	0.0							
13	-99.0000	129.3400	37.0800	0.9878	-17.8000	193.8000	0.0	0.0							
14	-148.5000	128.7000	37.0800	0.9585	-17.5700	180.9000	0.0	0.0							
15	-198.0000	126.3200	37.0800	0.9101	-17.0800	174.5000	0.0	0.0							
16	-247.5000	123.7600	37.0800	0.9126	-15.9000	160.8000	0.0	0.0							
17	-297.0000	119.6600	37.0800	0.6567	-13.4900	147.4000	0.0	0.0							
18	-346.5000	113.5000	37.0800	0.4944	-11.2700	145.0000	0.0	0.0							
19	-396.0000	103.6000	21.7500	0.5689	-7.7200	114.3200	0.0	0.0							
20	-445.5000	88.3000	14.8000	0.5679	-6.1200	95.0700	0.0	0.0							
21	-495.0000	32.8600	3.4000	0.6443	-1.3600	34.8000	0.0	0.0							
STATION	IWBKII	BKRAD(I)	BILRAD(I)	BKGCP(I)	BKWDD(I)	PHI(I)	PSI(I)	LWQ(I)							
1	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
2	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
3	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
4	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
5	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
6	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
7	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
8	9	60.6000	34.5000	23.7000	3.0000	0.4100	0.2360	14.0000							
9	9	66.3200	26.7000	27.1600	2.0000	0.4260	0.2250	4.0.5000							
10	7	71.5000	24.5000	31.4000	3.0000	0.4520	0.1920	4.0.5000							
11	7	74.7500	15.6000	35.2000	3.0000	0.4790	0.1650	4.0.5000							
12	7	76.2000	14.7000	34.1600	3.0000	0.4430	0.1560	4.0.5000							
13	7	75.0000	14.6000	32.0000	3.0000	0.4470	0.1880	4.0.5000							
14	7	71.8000	20.5000	30.0500	3.0000	0.4670	0.1870	4.0.5000							
15	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
16	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
17	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
18	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
19	4	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
20	3	0.0	0.0	0.0	0.0	0.0	0.0	0.0							
21	3	0.0	0.0	0.0	0.0	0.0	0.0	0.0							

U08(NW) :	16.8900	33.7800	42.2300				
BETA(M) :	0.0	30.0000	45.0000	60.0000	90.0000	125.0000	180.0000
OMEGA(L) :	4.0000	3.0000	2.5000	2.2500	2.2000	2.1000	2.0000
	1.8000	1.7000	1.6000	1.5500	1.5000	1.4000	1.3000
	1.1000	1.0000	0.9000	0.8000	0.7000	0.6000	0.5000
	0.3000	0.2000	0.1000				
H13(NW) :	3.0200	4.9000	6.5000	10.2000	16.0000		
OMP(NW) :	0.0	0.0	0.0	0.0	0.0	0.0	

MANIPULATIONS IN SUBROUTINE CHECK :

FORM PARAMETERS YIELD FD : CR = 0.6023

XCG = -20.9000 WGT = 0.1831047E 00

STATION PARAMETERS YIELD FD : CR = 0.6037

Lrn = -20.8483 WGT = 0.1835109E 00

DX(1) :	40.5000	49.5000	49.5000	40.5000	40.5000	40.5000	40.5000	40.5000	40.5000	40.5000	40.5000
	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000

STASPA :	24.7500	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000
	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000	49.5000

OMEGA (L) :	0.2250	0.2609	0.2858	0.2948	0.2966	0.2118	0.3195	0.3278	0.2266	0.2666	0.2572
	0.3680	0.3819	0.3963	0.4125	0.4308	0.4519	0.4763	0.5057	0.5401	0.5223	0.6260

H13(NW) :	3.0200	4.9000	6.5000	10.2000	16.9000						
OMP(NW) :	1.3098	1.0282	0.8428	0.7127	0.5537						

SPECTRUM # 1											
SPOMS :	0.7859	0.8513	0.9168	0.9823	1.0476	1.1002	1.1526	1.1910	1.2212	1.2574	1.2631
	1.3360	1.3621	1.3883	1.4276	1.4669	1.5062	1.5717	1.6372	1.7027	1.7697	1.8337
	1.9646	2.0956	2.2266	2.2574	2.4885	2.6195	2.7505	2.8815	2.8124	2.8124	2.4552
	3.5363	3.6673	3.7983	3.9293							
SPCTM :	0.0018	0.0171	0.0710	0.1765	0.3140	0.4276	0.5129	0.5980	0.6426	0.6725	0.6725
	0.6211	0.6164	0.6061	0.5834	0.5579	0.5294	0.4786	0.4273	0.3792	0.3231	0.2580
	0.2239	0.1715	0.1320	0.1022	0.0768	0.0529	0.0500	0.0400	0.0272	0.0216	0.0178

SPECTRUM # 2											
SPOMS :	0.6169	0.6684	0.7198	0.7712	0.8226	0.8637	0.9049	0.9357	0.9666	0.9871	1.0077
	1.0488	1.0694	1.0899	1.1208	1.1516	1.1825	1.2339	1.2853	1.3367	1.3851	1.4510
	1.5424	1.6452	1.7480	1.8508	1.9537	2.0565	2.1593	2.2621	2.2650	2.4676	2.6734
	2.7763		2.8791	2.9819	3.0NP47						
SPCTM :	0.0061	0.0572	0.2380	0.5917	1.0528	1.4170	1.7100	1.8902	2.0005	2.0541	2.0819
	2.0827	2.0603	2.0259	1.9563	1.8709	1.7753	1.6040	1.4330	1.2667	1.1170	0.9570
	0.7507	0.5751	0.4425	0.3428	0.2677	0.2100	0.1675	0.1342	0.1094	0.0724	0.0450

SPECTRUM # 3											
SPOMS :	0.5357	0.5803	0.6249	0.6696	0.7142	0.7499	0.7856	0.8124	0.8507	0.8871	0.9240
	0.9106	0.9285	0.9463	0.9731	0.9999	1.0267	1.0713	1.1160	1.1606	1.2052	1.2499
	1.3391	1.4284	1.5177	1.6070	1.6963	1.7955	1.8748	1.9641	2.0634	2.1423	2.3212
	2.4105	2.4997	2.5690	2.6783							
SPCTM :	0.0123	0.1159	0.4824	1.1002	2.1337	2.8719	3.4857	3.8700	4.0647	4.2194	4.2371
	4.2210	4.1757	4.1059	3.9648	3.7918	3.5950	3.2526	2.9712	2.6256	1.9560	1.7360
	1.5214	1.1655	0.8968	0.6948	0.5426	0.4274	0.3394	0.2721	0.2107	0.1769	0.1211
	0.1007	0.0842	0.0708	0.0500							

SPECTRUM # 4

SPOMS	:	0.4276	0.4632	0.4980	0.5345	0.5701	0.5987	0.6272	0.6495	0.6600	0.6842	0.7127
		0.7269	0.7412	0.7554	0.7768	0.7982	0.8196	0.8552	0.8908	0.9265	0.9671	1.0314
		1.0690	1.1403	1.2116	1.2828	1.3541	1.4254	1.4966	1.5670	1.6307	1.7104	1.7510
		1.9242	1.9955	2.0668	2.1380							
SPCTM	:	0.0380	0.3576	1.4882	3.6993	6.5818	8.8590	10.7524	11.8116	12.5377	12.8422	13.0147
		13.0205	12.8808	12.6656	12.2204	11.6967	11.0989	10.0334	9.9587	9.0217	6.1264	5.3643
		4.6932	3.952	2.7664	2.1433	1.6739	1.3185	1.0675	0.8202	0.6776	0.5517	0.4574
		0.3105	0.2597	0.2185	0.1860							

SPECTRUM # 5

SPOMS	:	0.3322	0.3599	0.3876	0.4153	0.4420	0.4651	0.4872	0.5024	0.5205	0.5315	0.5427
		0.5647	0.5758	0.5869	0.6025	0.6201	0.6267	0.6644	0.6921	0.7108	0.7475	0.7741
		0.8305	0.8859	0.9412	0.9666	1.0520	1.1073	1.1627	1.2181	1.2724	1.2759	1.2647
		1.4949	1.5503	1.6056	1.6610							
SPCTM	:	0.1342	1.2637	5.2587	13.0718	23.2573	31.3039	37.9944	41.7372	44.3017	45.3792	46.1853
		46.0092	45.5155	44.7548	43.2173	41.3313	39.2189	35.4560	31.6565	28.0773	26.6752	21.6640
		16.5837	12.7039	9.7753	7.5725	5.9149	4.6590	3.7014	2.9654	2.3057	1.5987	1.3201
		1.0973	0.9178	0.7722	0.6532							

CHANGES (IF ANY) IN STATION FORM PARAMETERS FOLLOW

UCB(N)	:	16.0990	23.7600	42.2200			
BETA(M)	:	0.0	30.0000	45.0000	60.0000	90.0000	135.0000
OMEGA(L)	:	4.0000	3.0000	2.5000	2.2500	2.2000	2.0000
		1.8000	1.7000	1.5000	1.5500	1.5000	1.4000
		1.1000	1.0000	0.9000	0.8000	0.7000	0.6000
		0.2000	0.2000	0.1000			
H13(NM)	:	3.0200	4.9000	6.5000	10.7000	16.0000	
OMP(NM)	:	0.0	0.0	0.0	0.0	0.0	0.0

MANIPULATIONS IN SUBROUTINE CHECK :

FORM PARAMETERS YIELDFD : CB = 0.0210 XRC = -13.3000 WST = 0.2040013F 04

STATION PARAMETERS YIELDFD : CH = 0.6212 LCR = -13.3247 WST = 0.2041475E 04

DX(L)	=	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000
		52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000

STASPA	=	26.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000
		52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000	52.0000

OMEGA(L)	=	0.2204	0.2545	0.2788	0.2876	0.2972	0.3042	0.3118	0.3190	0.3261	0.3321
		0.3600	0.3724	0.3867	0.4025	0.4204	0.4404	0.4647	0.4970	0.5255	0.5971

W13(NW)	=	3.0200	4.9000	6.5000	10.2000	16.0000					
		OMP(NW)	=	1.3098	1.0283	0.8928	0.7127	0.5537			

SPECTRUM # 1

SPOMS	=	0.7859	0.8514	0.9169	0.9624	1.0479	1.1002	1.1527	1.1920	1.2517	1.3005
		1.3340	1.3622	1.3884	1.4277	1.4670	1.5042	1.5710	1.6273	1.6813	1.7332

		1.9648	2.0957	2.2267	2.3577	2.4987	2.6107	2.7507	2.9016	2.9124	2.9746
		3.5366	3.6675	3.7465	3.9295						3.4014

SPCTM	=	0.0018	0.0171	0.0710	0.1764	0.3129	0.4225	0.5129	0.5634	0.6125	0.6234
		0.6210	0.6144	0.6041	0.5834	0.5579	0.5294	0.4784	0.4273	0.3231	0.2510

		0.2238	0.1715	0.1319	0.1022	0.0798	0.0629	0.0500	0.0466	0.0263	0.0176
		0.0148	0.0124	0.0124	0.0104	0.0088					

SPECTRUM # 2

SPOMS	=	0.6170	0.6684	0.7198	0.7717	0.8226	0.8638	0.9049	0.9355	0.9666	1.0077
		1.0489	1.0694	1.0900	1.1209	1.1517	1.1826	1.2340	1.2954	1.3262	1.4210

		1.5425	1.6453	1.7481	1.8510	1.9538	2.0544	2.1594	2.2423	2.3451	2.4470
		2.7764	2.8703	2.9821	3.0840						2.5700

SPCTM	=	0.0061	0.0572	0.2380	0.5917	1.0527	1.4169	1.7198	1.8892	2.0082	2.0616
		2.0825	2.0602	2.0258	1.9662	1.8708	1.7752	1.6048	1.4320	1.1169	0.9704

		0.7506	0.5750	0.4425	0.2428	0.2677	0.2109	0.1475	0.1347	0.0962	0.0772
		0.0497	0.0415	0.0350	0.0296	0.0155					

SPECTRUM # 3

SPOMS	=	0.5357	0.5803	0.6250	0.6696	0.7143	0.7500	0.7957	0.8175	0.8571	0.8921
		0.9107	0.9285	0.9464	0.9737	1.0000	1.0247	1.0714	1.1160	1.1607	1.2500

		1.3392	1.4285	1.5178	1.6071	1.6964	1.7956	1.8749	1.9427	2.0475	2.2217
		2.4106	2.4999	2.5892	2.6785						

SPCTM	=	0.0123	0.1159	0.4424	1.1097	2.1335	2.8717	3.4855	3.8284	4.0460	4.2161
		4.2207	4.1754	4.1056	2.0464	3.7916	3.5975	3.2524	2.9040	2.6711	1.7316

		1.5213	1.1654	0.8967	0.6949	0.5626	0.4274	0.3395	0.2770	0.2107	0.1467
		0.1007	0.0842	0.0708	0.0500						0.0141

SPECTRUM # 4

SPOMS :	0.4276	0.4633	0.4989	0.5245	0.5702	0.5987	0.6272	0.6495	0.6700	0.6984	0.7177
	0.7270	0.7412	0.7555	0.7769	0.7982	0.8196	0.8553	0.8800	0.9265	0.9676	1.0234
	1.0691	1.1404	1.2116	1.2820	1.3542	1.4254	1.4967	1.5450	1.6207	1.7105	1.7515
	1.9244	1.9956	2.0669	2.1387							
SPCTM :	0.0380	0.3576	1.4681	3.6091	6.5814	8.8564	10.7517	11.8100	12.5344	13.0149	13.0666
	13.0197	12.6800	12.6648	12.2297	11.6960	11.0962	10.0323	8.9582	7.0217	6.1240	5.3650
	4.6929	3.5950	2.7662	2.1432	1.6738	1.3184	1.0474	0.9302	0.6779	0.5117	0.4524
	0.3105	0.2597	0.2185	0.1940							

SPECTRUM # 5

SPOMS :	0.3322	0.3599	0.3676	0.4153	0.4430	0.4651	0.4873	0.5039	0.5205	0.5416	0.5557
	0.5648	0.5759	0.5869	0.6035	0.6201	0.6368	0.6644	0.6921	0.7105	0.7475	0.7752
	0.8306	0.8859	0.9413	0.9947	1.0520	1.1074	1.1628	1.2182	1.2735	1.3790	1.4343
	1.4950	1.5504	1.6057	1.6611							
SPCTM :	0.1342	1.2636	5.2584	13.0710	23.2559	31.3070	37.9920	41.7346	44.2984	45.9807	46.1824
	46.0063	45.5126	44.7520	43.2147	41.3287	39.2165	35.4518	31.6545	29.0754	24.6735	21.6467
	16.5827	12.7031	9.7747	7.5730	5.9145	4.6587	3.7011	2.9657	2.3050	1.9205	1.5946
	1.0973	0.9177	0.7721	0.6537							

CHANGES (IF ANY) IN STATION FORM PARAMETERS FOLLOW

>