

AD-A073 135

AERONAUTICAL SYSTEMS DIV WRIGHT-PATTERSON AFB OH
SUPERSONIC COMBUSTION, AIR DISSOCIATION THROUGH SHOCK WAVES AND--ETC(U)
MAY 79 D W SCHROLL

F/G 21/5

UNCLASSIFIED

ASD-TR-79-5002

NL

AD
A073 135

END
DATE
FILMED
9 79
DDC



LEVEL #

14 ASD-TR-79-5002

AD A 073135

6

SUPERSONIC COMBUSTION, AIR DISSOCIATION THROUGH SHOCK WAVES AND AERODYNAMICS OF CHEMICALLY REACTING GASES IN A PLANAR CONVERGING - DIVERGING NOZZLE.

9 Final rept. Mar-Oct 78

Crew Equipment and Recovery Branch
Strategic Systems Special Projects Office

12 72p

11 May 1979

TECHNICAL REPORT ASD-TR-79-5002
Final Report for Period March 1978 - October 1978

10 Dennis W. / Schroll

Approved for public release; distribution unlimited.

DDC FILE COPY.

Aeronautical
AEROSPACE SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

DDC
AUG 27 1979
A

008 800
79 08 27 053

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report has been reviewed by the Information Office (OI) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

Dennis W. Schroll

DENNIS W. SCHROLL
Aerospace Engineer

C. R. Carroll

C. R. CARROLL
Chief, Equipment Engineering

ACCESSION FOR	
NTIS GRA&I	<input checked="" type="checkbox"/>
DDC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/ _____	
Availability Codes	
Dist. A	Avail and/or special

"If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify ASD/YEE, W-PAFB, OH 45433 to help us maintain a current mailing list".

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ASD-TR-79-5002 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SUPERSONIC COMBUSTION, AIR DISSOCIATION THROUGH SHOCK WAVES AND AERODYNAMICS OF CHEMICALLY REACTING GASES IN A PLANAR CONVERGING - DIVERGING NOZZLE		5. TYPE OF REPORT & PERIOD COVERED Final Report Period Mar 78 - Oct 78
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Dennis W. Schroll ASD/YEY WPAFB OH 45433		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS ASD / ENECC WPAFB OH 45433		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS N/A
11. CONTROLLING OFFICE NAME AND ADDRESS ASD/DPCD Long-Term-Full Time Training. Contract		12. REPORT DATE May 1979
		13. NUMBER OF PAGES 41
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Prepared in cooperation with Prof R. Edse, Ohio State University		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) RAMJET, SCRAMJET, SUPERSONIC COMBUSTION, CHEMICALLY REACTING GASES, DISSOCIATION OF AIR, SHOCK WAVES		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Much research and testing has been accomplished in the past years to develop a supersonic ramjet engine. The topic is discussed in almost all propulsion texts. However, very little headway has been made in theoretical design techniques as many of the standard computational methods used for ramjet subsonic combustion do not apply. For instance, it is possible to use a constant area nozzle for subsonic combustion in a ramjet as heat		

DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 68 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

79 08 27 058

addition and frictional effects in the combustion chamber will decrease the pressure and accelerate the flow. For supersonic combustion the velocity decreases tending to choke the flow. To overcome this difficulty area increase in the combustion zone are used. The analysis assumes a strong normal shock on the diffuser inlet for free stream mach numbers of 5 and 10 and the analysis also considers shock free flow of these mach numbers. Accompanied with the strong normal shock are large stagnation pressure losses in the diffuser inlet, meaning the diffuser inlet will act as a flat plate to oncoming airflow. For this reason, it would be best to provide air spillage and not use too large an inlet. For the shock expelled case, the drag through the engine would be less, but static pressure rises up to 272 atmospheres are calculated.

assumed.

Basic assumptions that apply to the computational schemes in this paper are the quantum mechanical relationships developed by statistical mechanics. This means the assumption of equilibrium must apply within the zones of the engine calculated. This is a most valid assumption for high speed flow. High energy molecules will have time to reach equilibrium values along each section of the engine, but have little time to dissipate to the walls of the engine. The inviscid assumption is then valid. Of course, chemical reactions within the combustion chamber are not so simple in nature as applied here, but the constant pressure assumption allows chemically reacting computations to be determined and then compared to the perfect gas computational scheme.

The final Thrust Specific Fuel Consumption (TSFC) values are sufficiently high to warrant further investigation into supersonic combustion as a method of propulsion. They are slightly higher than that of a designed ramjet which is in operation with hydrocarbon fuels. At these very high speeds, it is possible to pass a larger amount of air mass per unit time through the supersonic ramjet engine. It's thrust values will therefore be much higher than for the developed ramjets.

FOREWORD

This report is the compiled results of an in-house research project conducted by the author, Dennis W. Schroll, while attending the Ohio State University, Columbus, Ohio. This final research report was to fulfill the requirements for a Master of Science Degree in Aeronautics and Astronautics under the sponsorship of Aerospace Systems Division (DPCD) Long-Term Full-Time Training Contract F3360-75-A-0549-0002.

The work reported herein was performed during the period March 1978 to October 1978 by the author. This report was released by the author in December 1978.

The author wishes to give special thanks to his immediate supervisor at the time, Mr. W. A. Lucka, for his initial nomination to this program and to Professor R. Edse for being research advisor. This study would not have been possible without Professor Edse's equations and tables which he has developed in his research projects that are closely related to those outlined in this report.

TABLE OF CONTENTS

SECTION		PAGE
I	INTRODUCTION	1
II	COMPRESSION THROUGH VEHICLE BOW SHOCK WAVE	2
III	PERFECT GAS COMPUTATIONS ACROSS DIFFUSER INLET SPIKE	2
IV	AIR DISSOCIATION THROUGH A SHOCK WAVE	4
V	ISENTROPIC DIFFUSER INLET FLOW CALCULATION	8
VI	ISENTROPIC DIFFUSER EXIT FLOW CALCULATIONS	10
VII	SUPERSONIC AIR FLOW AND HYDROGEN FUEL COMBUSTION CALCULATIONS	21
VIII	ISENTROPIC FLOW CALCULATIONS AT NOZZLE	25
IX	CALCULATION OF AREA RATIOS FROM COMPUTED FLOW PROPERTIES	27
X	SPECIFIC NET THRUST AND TSFC	28
XI	CONCLUDING COMMENTS	29
	BIBLIOGRAPHY	61

LIST OF ILLUSTRATIONS

FIGURE		PAGE
1	Entrance Shock for Starting Ramjet - Supercritical Condition	1
2	Shock is Swallowed with Supersonic Flow Throughout - Supercritical Condition	1
3	Inlet Spike or Forward Region of Hypersonic Vehicle	3
4	Internal Modes of Energy of Diatomic Oxygen and Nitrogen Showing Regions of Relaxation	4
5	Heat Release Values Relative to Air-Fuel Ratios	15
6	Heat Release Values Relative to Air-Fuel Ratios	16
7	Supersonic Flow Required at Entrance to the Combustion Chamber as a Function of the Heat Release	17
8	Stagnation Pressure Drop Across Variable Area Combustion Zone	18
9	Temperature and Area Increase Across Variable Area Combustion Zone	19
10	Total Temperature Change Across Variable Area Combustion Zone	20
11	Shocked Inlet, $M_\infty = 5$, $\nu_{O_2}^\circ = 0.5, 2.0$ Area Relationships	21
12	Shocked Inlet, $M_\infty = 10$, $\nu_{O_2}^\circ = 0.5, 2.0$ Area Relationships	31
13	Shock Expelled, $M_\infty = 5$, $\nu_{O_2}^\circ = 0.5, 2.0$ Area Relationships	32
14	Shock Expelled, $M_\infty = 10$, $\nu_{O_2}^\circ = 0.5, 2.0$ Area Relationships	32
15	Typical Flight Vehicle with Supersonic Ramjet Engine	34
16	Typical Missile with Supersonic Ramjet Engine	34
17	One Supersonic Ramjet Combustion Module	34

LIST OF TABLES

TABLE		PAGE
1	Calculated SNT and TSFC Values	30
2-3	Co-efficients $a^{(j)}(T)$ of Equilibrium Constants $K_p^{(j)}(T)$	35-36
4-5	Equilibrium Constants, $K^{(j)} \text{ atm}^{\Delta \nu(j)}$	37-38
6-7	Reduced Absolute Formation Enthalpies	39-40
8-9	Reduced Sensible Enthalpies, $\left(\frac{H - E_0}{R T}\right)_i^T$	41-42
10-11	Reduced Entropies, $\left(\frac{S_{p=1}}{R}\right)_i^T$	43-44
12-13	Reduced Specific Heats $\left(\frac{C_p}{R}\right)_i^T$	45-46
14-15	Reduced Entropy Divided by $\ln T$, $\left(\frac{S_{p=1}}{R \ln T}\right)_i^T$	47-48
16	Fluid Properties of Supersonic Combustion Ramjet Shocked Inlet (Critical Condition)	49
17	Fluid Properties of Supersonic Combustion Ramjet Shocked Inlet, $M_\infty = 5$, $\nu_{O_2}^0 = 0.5$	50
18	Fluid Properties of Supersonic Combustion Ramjet Shocked Inlet, $M_\infty = 5$, $\nu_{O_2}^0 = 2$	51
19	Fluid Properties of Supersonic Combustion Ramjet Shocked Inlet (Critical Condition)	52
20	Fluid Properties of Supersonic Combustion Ramjet Shocked Inlet, $M_\infty = 10$, $\nu_{O_2}^0 = 0.5$	53
21	Fluid Properties of Supersonic Combustion Ramjet Shocked Inlet, $M_\infty = 10$, $\nu_{O_2}^0 = 2$	54
22	Fluid Properties of Supersonic Combustion Ramjet Expelled (Supercritical Condition)	55
23	Fluid Properties of Supersonic Combustion Ramjet Shock Expelled, $M_\infty = 5$, $\nu_{O_2}^0 = 0.5$	56
24	Fluid Properties of Supersonic Combustion Ramjet Shock Expelled, $M_\infty = 5$, $\nu_{O_2}^0 = 2$	57

LIST OF TABLES (continued)

TABLE		PAGE
25	Fluid Properties of Supersonic Combustion Ramjet Shock Expelled (Supercritical Condition)	58
26	Fluid Properties of Supersonic Combustion Ramjet Shock Expelled, $M_{\infty} = 10$, $\gamma_{O_2} = 0.5$	59
27	Fluid Properties of Supersonic Combustion Ramjet Shock Expelled, $M_{\infty} = 10$, $\gamma_{O_2} = 2$	60

GLOSSARY OF TERMINOLOGY

T	(°K) temperature
P	(atm) pressure
u	(m/sec) velocity
M	dimensionless frozen flow mach number
η_i	partial pressure fractions of molecules and atoms
m	(g/mole) molecular weight
$\frac{S}{R_2}$	dimensionless entropy
$\left[\frac{h_f \text{ abs}}{R_2 T_2} \right]^T$	dimensionless enthalpy
A	(m ²) area
γ	ratio of specific heats for frozen flow
$n_{(i)}^g$	global molar value of species i
R	universal gas constant = 8314.33 J/K-mole °K
$K_p^{(i)}$	equilibrium pressure coefficient
$\left[\frac{H_f}{R T} \right]_i^T$	absolute enthalpy of each species
$\left[\frac{C_p}{R} \right]_i$	non-dimensionalized specific heat
$h_f \text{ abs}^\circ$	absolute formation enthalpy
T_o, P_o	stagnation fluid properties determined from the isentropic perfect gas relationships
ρ	density
q	heat addition coefficient
$\nu_{O_2}^\circ$	fuel-air ratio
X	correction coefficient

GLOSSARY OF TERMINOLOGY (continued)

X_i mass fraction of species i
 $\frac{\dot{W}}{\dot{m}_a}$ specific net thrust
 TSFC thrust specific fuel consumption
 f mass weighted fuel-air ratio

SECTION I
INTRODUCTION

A variable area supersonic combustion ramjet was modeled for free stream mach numbers of 5 and 10. It was desired to use a configuration as that proposed in several articles on a hypersonic research vehicle as a joint NASA-USAF project. The problem is divided into four sections: 1) the starting shock at $M_{\infty} = 5$, 2) the swallowed shock at $M_{\infty} = 5$, 3) the starting shock at $M_{\infty} = 10$, 4) the swallowed shock at $M_{\infty} = 10$.

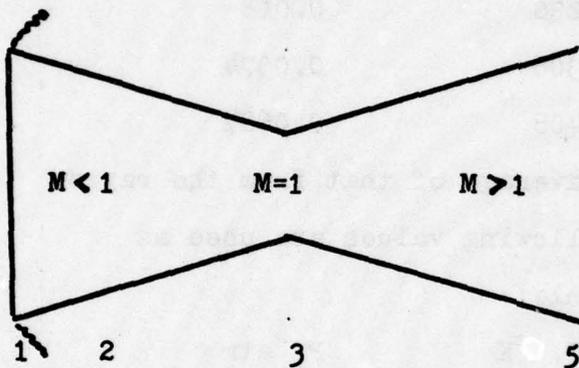


Figure 1. Entrance Shock for Starting Ramjet-Subcritical Condition

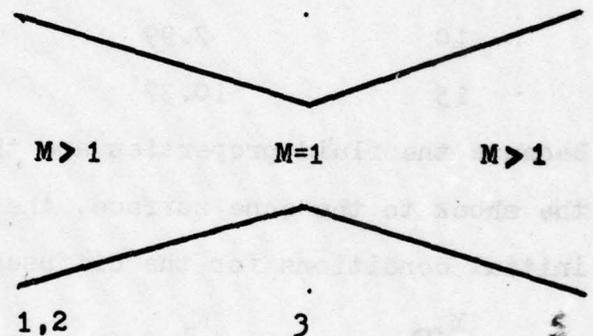


Figure 2. Shock is Swallowed with Supersonic Flow Throughout-Supercritical Condition

The flow is considered non-viscous and the geometry of the converging-diverging channels are 2 dimensional and planar. Effects of curvature to compress and expand the flow uniformly across incremental mach lines are ignored. Rather, it is the purpose of this project to determine the fluid properties at various stations through constant properties of entropy and pressure. Dissociation of air and hydrogen/air chemical reactions are computed.

SECTION II

COMPRESSION THROUGH VEHICLE BOW SHOCK WAVE


The bow shock wave off the hypersonic vehicle is considered as the first stage of air compression. From Taylor-Maccoll cone theory (cone at zero angle-of-attack) with a $7\frac{1}{2}$ degree cone half angle, fluid properties are estimated to be:

M_∞	M_1	T_1 °K	P_1 atm
5	4.51	236	0.018
10	7.99	306	0.0374
15	10.37	408	0.0687

Because the fluid properties are the average of that from the ray on the shock to the cone surface, the following values are used as initial conditions for the diffuser inlet:

M_∞	M_1	T_1 °K	P_1 atm
5	5	230	0.02
10	8	300	0.04

Thus the bow shock wave off the vehicle acts as a mild first stage compressor.



The molar volume of air of 3.76 of nitrogen to 1 of oxygen is assumed and the value of the universal gas constant as used through this report is given.

SECTION III

PERFECT GAS COMPUTATIONS ACROSS DIFFUSER INLET SPIKE

To estimate the fluid properties temperature and pressure across the shock, perfect gas relationships are used with decreasing values of γ for higher temperatures.

$$P_2 = P_1 \left[\frac{2\gamma}{\gamma+1} M_1^2 - \frac{\gamma-1}{\gamma+1} \right]$$

$$T_2 = T_1 \left[\frac{\left(1 + \frac{\gamma-1}{2} M_1^2\right) \left(\gamma M_1^2 - \frac{\gamma-1}{2}\right)}{\left(\frac{\gamma+1}{2} M_1\right)^2} \right]$$

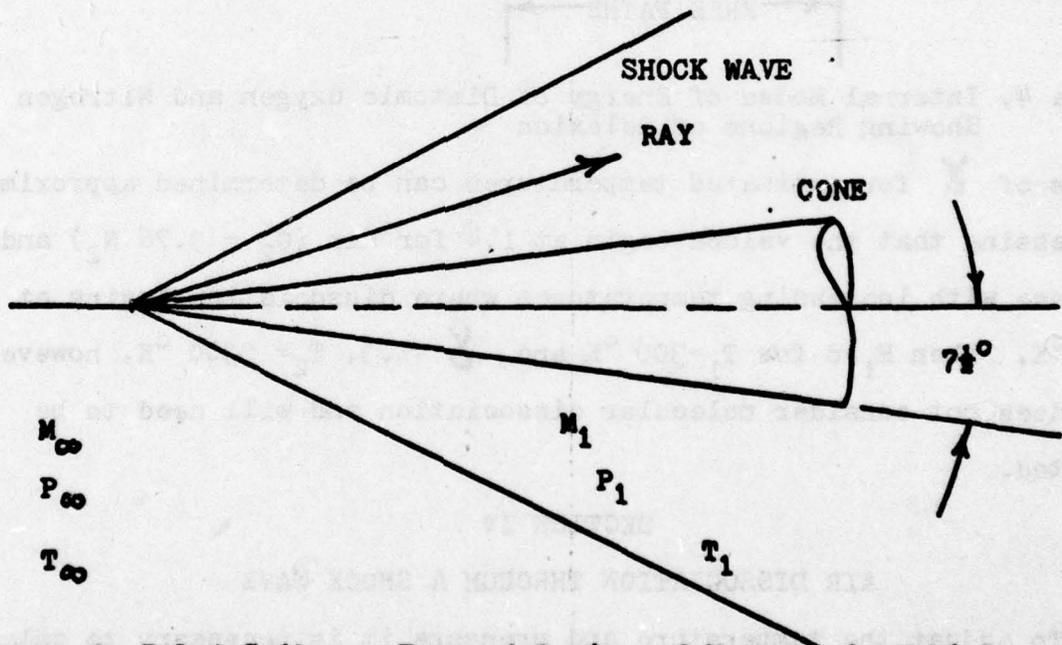


Figure 3. Inlet Spike or Forward Region of Hypersonic Vehicle

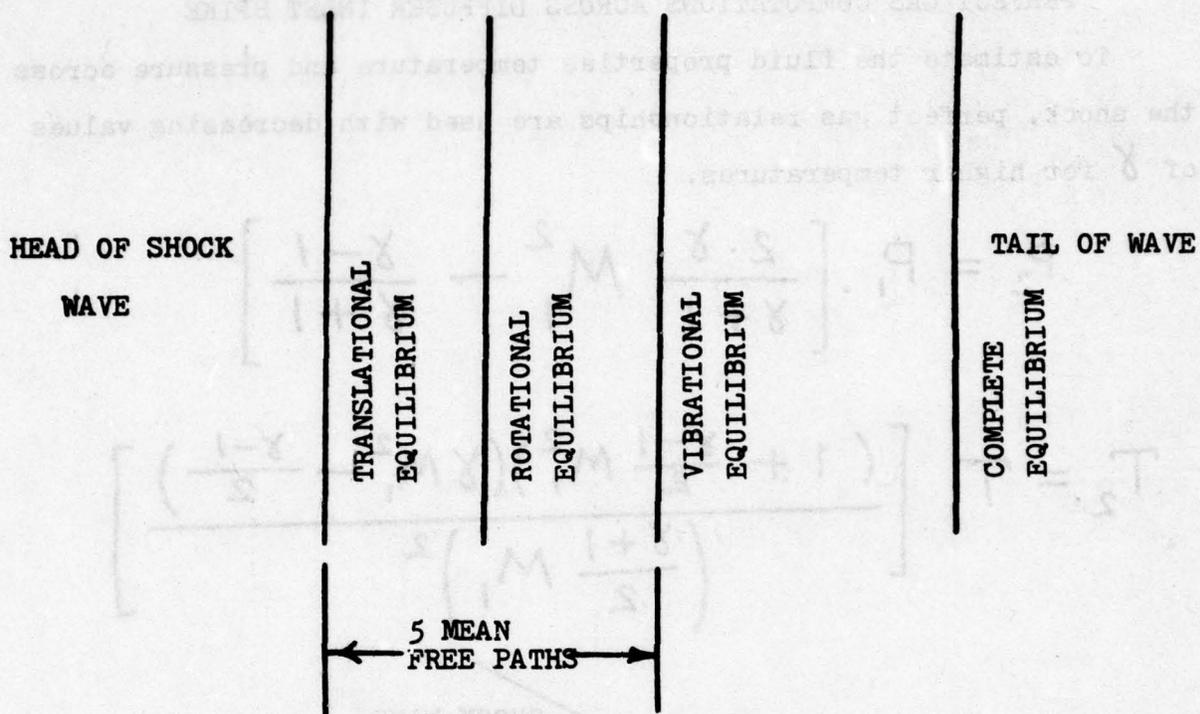


Figure 4. Internal Modes of Energy of Diatomic Oxygen and Nitrogen Showing Regions of Relaxion

Values of γ for estimated temperatures can be determined approximately by guessing that the values begin at 1.4 for air ($O_2 + 3.76 N_2$) and decrease with increasing temperatures where dissociation begins at 1100 °K. When $M_1=8$ for $T_1=300$ °K and $\gamma=1.3$, $T_2=3300$ °K, however this does not consider molecular dissociation and will need to be adjusted.

SECTION IV

AIR DISSOCIATION THROUGH A SHOCK WAVE

To adjust the temperature and pressure it is necessary to calculate the mole fractions of molecule and atom species of O_2 , N_2 , O , N and NO from the estimated temperature and pressure. The equilibrium pressure

coefficient equations of each individual reaction is written, $(K^{(i)})$ and the fact that the sum of the mole fractions is equal to 1, and the ratio of oxygen to nitrogen atoms is given. The equations are rearranged and values of η_{O_2} are estimated until the percent error is less than .001.

$$\eta_O = K^{(O)} \sqrt{\eta_{O_2}}$$

$$\sqrt{\eta_{N_2}} = \sqrt{a^2 + 1 - \eta_{O_2} - \eta_O} - a$$

where

$$a = \frac{K^{(N)} + K^{(NO)} \sqrt{\eta_{O_2}}}{2}$$

values of η_{O_2} are assumed until

$$\frac{100}{3.76} \left| \frac{\eta_{N_2} + \frac{1}{2}(\eta_N + \eta_{NO})}{\eta_{O_2} + \frac{1}{2}(\eta_O + \eta_{NO})} - 3.76 \right| = |\Delta| < .001$$

and

$$\eta_{NO} = \sqrt{\eta_{N_2} \eta_{O_2}} K_P^{(NO)}$$

$$\eta_N = \frac{\sqrt{\eta_{N_2}} K_P^{(N)}}{\sqrt{P_{EST}}}$$

The Hugoniot Equation is solved for P_2 EST until the per cent error is less than .01%.

$$\frac{P_2^{CALC}}{P_1} = B + \sqrt{B^2 + \frac{T_2}{T_1} \cdot \frac{m_1}{m_2}}$$

where

$$B = \frac{T_2}{T_1} \cdot \frac{m_1}{m_2} \sum_i n_{i,2} \left(\frac{H_f}{RT} \right)_i^{T_2} - \sum_i n_{i,1} \left(\frac{H_f}{RT} \right)_i^{T_1} - \frac{1}{2} \left(\frac{T_2}{T_1} \cdot \frac{m_1}{m_2} - 1 \right)$$

It is now necessary to recalculate the molar fractions each time a new pressure is assumed. Now with these series of equations solved for an estimated temperature and corresponding values of pressure, a value of the velocity is calculated.

$$u_2 = \frac{T_2}{T_1} \cdot \frac{m_1}{m_2} \cdot \frac{P_1}{P_2} u_1$$

$$\left[u_1^{CALC} \right]^2 = \left[\left(\frac{P_2}{P_1} - 1 \right) \div \left(1 - \frac{T_2}{T_1} \cdot \frac{P_2}{P_1} \right) \right] \left[\frac{T_1 m_2 R}{m_1} \right]$$

until

$$\left| \frac{u_1^{CALC} - u_1^{KNOWN}}{100 \times u_1^{KNOWN}} \right| < .01\%$$

By successive linear extrapolation a new value of temperature is determined, the pressure and mole fractions are adjusted until the correct velocity is calculated. This gives values of T_2 , P_2 and u_2 behind the shock.

Now consider frozen flow where a value of γ is determined for these values of temperature and pressure.

$$\gamma^{FROZ} = \frac{\sum_i n_i \left(\frac{c_p}{R} \right)_i^T}{\sum_i n_i \left(\frac{c_p}{R} \right)_i^T - 1}$$

To calculate the mach number (M^{FROZ}), it is necessary to determine the speed of sound in the mixture at the position behind the shock. For temperatures less than 3000 °K, the contributions of the shifting speed of sound are negligible and only the frozen speed of sound is considered. As such the reference mach number is calculated from the definition of the speed of sound.

$$M^{FROZ} = \frac{u^{CALC}}{w^{FROZ}} = \frac{u^{CALC}}{\sqrt{\gamma^{FROZ} \frac{R}{M} T}}$$

at $M_1=8$, the value of the frozen mach number behind the inlet shock is

$$M^{FROZ} = \frac{2785}{\sqrt{1.2891 \left(\frac{8314.33}{28.36149} \right) 3.084}} = 0.3413$$

Now that the fluid properties are determined across the non-isentropic strong normal shock, a question might be posed as to whether the condition of assumed equilibrium is valid. Those modes of energy such as translational, rotational for diatomic oxygen and nitrogen usually reach equilibrium in less than 5 mean free paths of collision of the molecules. Relaxation of the vibrational energy state usually takes a somewhat longer time, but for oxygen and nitrogen relaxation still occurs in a narrow region behind the shock. Therefore the frozen properties are assumed to be determined after relaxation or for equilibrium (see Figure 4).

SECTION V

ISENTROPIC DIFFUSER FLOW CALCULATIONS

Behind the shock wave the flow is subsonic and a converging channel will increase the flow velocity, and decrease the molecule translational energy (temperature) and decrease the pressure. That is, the more random molecular motion will be more ordered and directional. The temperature and pressure are estimated at the throat to be values as determined from the isentropic perfect gas relationships

$$\frac{P_0}{P_3} = \left(1 + \frac{\gamma-1}{2} M_3^2\right)^{\frac{\gamma}{\gamma-1}} \quad \frac{T_0}{T_3} = \left(1 + \frac{\gamma-1}{2} M_3^2\right)$$

It is not necessary to calculate the stagnation properties as ratios can be taken and with sonic velocity assumed at the throat the equations are

$$P_3 = P_2 \left\{ \frac{\left(1 + \frac{\gamma-1}{2} M_2^2\right)^{\frac{\gamma}{\gamma-1}}}{\frac{\gamma+1}{2}} \right\} \quad T_3 = T_2 \left\{ \frac{1 + \frac{\gamma-1}{2} M_2^2}{\frac{\gamma+1}{2}} \right\}$$

It is now necessary to adjust the pressure and temperature to account for the dissociation of the air. The equation of entropy is

$$\left(\frac{S}{R_2}\right)^{T_{EST}} = \frac{\mathcal{M}_2}{\mathcal{M}} \left\{ \sum_i n_i \left(\frac{S}{R}\right)^{P=1, T_{EST}} - \sum_i n_i \ln n_i - \ln P \right\}$$

With the known properties behind the shock the dimensionless entropy is calculated. Next calculate the entropy for the estimated isentropic temperature and pressure. To do this the mole fractions are calculated as previously outlined and then the entropy is adjusted by changing the pressure until it is within .01% that of the entropy behind the shock. Each time a new pressure is assumed new values of

mole fractions must be calculated. However the mole fractions are relatively insensitive to small changes in pressure. To adjust the temperature, the absolute enthalpy is calculated.

$$\left(\frac{h_{f \text{ abs}}}{R_2 T_2} \right)^{T_{EST}} = \frac{T_{EST}}{T_2} \frac{M}{m} \sum_i n_i \left(\frac{\Delta H_{f \text{ abs}}}{R T} \right)^{T_{EST}}$$

From the energy equation for no fuel addition to the flow,

$$h_{f \text{ abs}}^0 = h_{f \text{ abs}}^{T_2} + \frac{U_2^2}{2} = h_{f \text{ abs}}^{T_3} + \frac{U_3^2}{2}$$

$$U_3^{\text{CALC}} = \left\{ \left[\left(\frac{h_{f \text{ abs}}}{R_2 T_2} \right)^{T_2} - \left(\frac{h_{f \text{ abs}}}{R_2 T_2} \right)^{T_3} \right] \frac{2(8314.33) T_2}{m_2} + U_2^2 \right\}^{1/2}$$

$$\gamma_3^{\text{FROZ}} = \frac{\sum_i n_i \left(\frac{C_p}{R} \right)^{T_3 \text{ EST}}}{\sum_i n_i \left(\frac{C_p}{R} \right)^{T_3 \text{ EST}} - 1}$$

$$M_3^{\text{FROZ}} = \frac{U_3^{\text{CALC}}}{\sqrt{\gamma_3^{\text{FROZ}} \frac{8314.33}{m_3} T_3}}$$

Should the mach number be larger than 1, then choose a value of temperature 100 °K larger and repeat the above procedure until a new mach number is determined. Now by linear extrapolation a third more accurate temperature is determined.


$$T_3^{\text{(est 3)}} = T_3^{\text{est 1}} + [M_3 = 1 - M_3^{\text{est 1}}] \\ \times \left[\frac{T_3^{\text{est 2}}}{M_3^{\text{est 2}}} = \frac{T_3^{\text{est 1}}}{M_3^{\text{est 1}}} \right]$$

The calculations are now repeated again and usually this value is within 0.1% error as the frozen flow mach number relationship is a fairly linear one with respect to temperature for constant entropy.

SECTION VI

ISENTROPIC DIFFUSER EXIT FLOW CALCULATIONS

To go to region 3C (exit diffuser and entrance of combustion chamber) is somewhat more involved. Heat addition due to the combustion of hydrogen and air for various values of the heat addition coefficient are calculated.

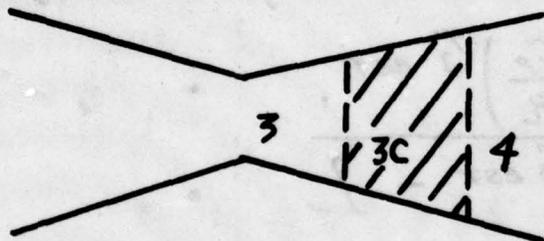

Now

$$\frac{T_{3C}}{T_3} = \frac{1 + \frac{\gamma-1}{2} M_3^2}{1 + \frac{\gamma-1}{2} M_{3C}^2}$$

for isentropic expansion, from

3 to 3C and for $dP=0$, $du=0$ from 3C to 4.

$$M_4 = \frac{M_{3C}}{\sqrt{1 + \frac{\gamma}{c_p} T_{3C}}} \quad \frac{T_{04}}{T_{03C}} = 1 + \frac{\frac{\gamma}{c_p} T_{3C}}{1 + \frac{\gamma-1}{2} M_{3C}^2}$$

$$\frac{P_{04}}{P_{03C}} = \left[\frac{1 + \frac{\gamma-1}{2} M_{3C}^2}{1 + \frac{\gamma-1}{2} M_3^2} \frac{1}{1 + \frac{\gamma}{c_p} T_{3C}} \right]^{\frac{\gamma}{\gamma-1}}$$

$$\frac{A_4}{A_{3C}} = \frac{T_4}{T_{3C}} = 1 + \frac{\frac{\gamma}{c_p} T_{3C}}{1 + \frac{\gamma-1}{2} M_{3C}^2} \quad \frac{P_4}{P_{3C}} = 1$$

The heat addition coefficient is then non-dimensionalized with respect to T_3 and plots are made.

$$M_4 = \frac{M_{3c}}{\sqrt{1 + \frac{q}{C_p T_3} \left[\frac{1 + \frac{\gamma-1}{2} M_{3c}^2}{\frac{1+\gamma}{2}} \right]}}$$

$$\frac{P_{04}}{P_{03c}} = \left[\frac{1 + \frac{\gamma-1}{2} M_{3c}^2 \left\{ \frac{1}{1 + \frac{q}{C_p T_3} \left[\frac{1 + \frac{\gamma-1}{2} M_{3c}^2}{\frac{1+\gamma}{2}} \right]} \right\}}{1 + \frac{\gamma-1}{2} M_{3c}^2} \right]^{\frac{\gamma}{\gamma-1}}$$

$$\frac{T_{04}}{T_{03c}} = \frac{1 + \frac{q}{C_p T_3} \left[\frac{1 + \frac{\gamma-1}{2} M_{3c}^2}{\frac{1+\gamma}{2}} \right]}{1 + \frac{\gamma-1}{2} M_{3c}^2}$$

$$\frac{A_4}{A_{3c}} = \frac{T_4}{T_{3c}} = 1 + \frac{q}{C_p T_3} \left[\frac{1 + \frac{\gamma-1}{2} M_{3c}^2}{\frac{1+\gamma}{2}} \right]$$


$$\frac{P_4}{P_{3c}} = 1 \quad \text{where,} \quad q = X \frac{\Delta H_{comb}^{fuel, T_s}}{m_{fuel-air mix}}$$

The non-dimensionalized heat addition coefficient q is given above. See reference 1 for an outline of the procedure to obtain this coefficient.

For hydrogen

$$\Delta H_{\text{COMB}}^{H_2, T_s} = 241.52 \times 10^6 \frac{\text{Joules}}{\text{K-mol}}$$

The mass of hydrogen-air mixture can be expressed relative to the number of moles of oxygen by $\nu_{O_2}^0$. Before combustion this ratio is given by



The maximum heat release is obtained for $\nu_{O_2}^0 = 0.5$ as the oxygen-hydrogen chemical reaction is $H_2 + \frac{1}{2}O_2 \rightleftharpoons H_2O$.

However, it is possible to have a leaner fuel-air mixture ratio

$$\frac{1}{2} \leq \nu_{O_2}^0 \leq \infty.$$

$$q = \chi \frac{\Delta H_{\text{COMB}}^{H_2, T_s}}{m_{H_2} + \nu_{O_2}^0 (m_{O_2} + 3.76 m_{N_2})}$$

The specific heat of the mixture, m is given as

$$C_{p,m} = \frac{\gamma_m}{\gamma_m - 1} R_m \quad \text{where } R_m = R / m_m$$

and $= 8314.33$ is the Universal Gas Constant

Several ideal assumptions are made in the combustion chamber that expedite computations. The hydrogen enters the combustion chamber at the same speed as that of the air, and its absolute enthalpy is determined at 1000°K for temperatures exceeding this and at the air temperature for air temperatures less than this

$$\frac{q}{C_{p,m} T_3} = \chi \frac{\Delta H_{\text{COMB}}^{H_2, T_s}}{\frac{\gamma_m}{\gamma_m - 1} \frac{R}{m_m} [m_{H_2} + \nu_{O_2}^0 (m_{O_2} + 3.76 m_{N_2})]}$$

Now according to the method outlined in reference 1 the value of M_m is,

$$M_m = \frac{4.76 \nu_{O_2}^{\circ} \frac{M_{H_2}}{M_{O_2} + 3.76 M_{N_2}}}{1 + 4.76 \nu_{O_2}^{\circ} \frac{M_{O_2} + 3.76 M_{N_2}}{M_1}} (M_{O_2} + 3.76 M_{N_2})$$

For temperatures less than 2000 °K the mass of the decelerated air is almost equal to $M_{O_2} + 3.76 M_{N_2}$. Substituting in all the appropriate values and cancelling out gives,

$$\frac{q}{C_{pm} T_3} = X \frac{\gamma - 1}{\gamma} \frac{29048}{(4.76 \nu_{O_2}^{\circ} + 1) T_3}$$

for hydrogen air mixture γ will range from 1.441 (no combustion) to 1.25 (combustion temperatures up to 3000 °K). Since this non-dimensionalized heat coefficient is mainly used to get an estimate of M_{3C} , $\gamma = 1.4$ is used as this is at the position of combustion initiation. A few words should be said about the correction coefficient X , as this pertains to the degree of combustion of gases as they travel across the nozzle. It can range from 0.4 for high temperatures and low pressures up to 1.0 for low temperatures and high pressures. With the possible exception of one case $M_{\infty} = 10$, no shock, values of 0.7 would seem satisfactory. For the sake of comparison, 0.7 is used in all computations. Two combustion cases were taken for all computations.

$$\begin{aligned} \nu_{O_2}^{\circ} &= 0.5 \quad (\text{rich mixture - maximum heat release}) \\ \nu_{O_2}^{\circ} &= 2 \quad (\text{lean mixture - minimum heat release}) \end{aligned}$$

The procedure to determine the fluid properties at the diffuser exit

3C was to first of all assume we want $M_4 = 1.2$. Too high a mach number in the combustion chamber will mean problems with mixing fuel and air. However, should the flow go subsonic again this would mean flow choking ($M = 1$) and the flow in the combustion chamber will go to low mach numbers. Therefore, in conclusion, it is desired to keep the flow within the mach number range at $M_3 = 1$ at the throat to $M_4 = 1.2$ at the exit of the combustion chamber.

Looking at Figure 3, M_3 can be determined from a calculated heat release coefficient and assumed value of $M_4 = 1.2$. This mach number is then used to calculate the fluid properties isentropically at the diffuser exit.

$$T_{3c} = \frac{T_{3c}}{T_{03c}} \frac{T_{03}}{T_3} T_3 = \frac{\left[1 + \frac{\gamma-1}{2} M_3^2\right]}{\left[1 + \frac{\gamma-1}{2} M_{3c}^2\right]} T_3$$

$$P_{3c} = \frac{P_{3c}}{P_{03c}} \frac{P_{03}}{P_3} P_3 = \frac{\left[1 + \frac{\gamma-1}{2} M_3^2\right]^{\frac{\gamma}{\gamma-1}}}{\left[1 + \frac{\gamma-1}{2} M_{3c}^2\right]^{\frac{\gamma}{\gamma-1}}} P_3$$

Next, calculate the flow properties considering air dissociation by the same method as used to determine the flow properties at the throat until the value of M_{3c}^{FROZ} is within 0.1% error of that of the mach number determined by the perfect gas method. Inspection of Figures 5 through 10 reveals that it is necessary to add fuel and combust the gas downstream of the throat to prevent choking the flow. Even though the molecular velocity will approximately double in magnitude from the diffuser throat to the diffuser exit for supersonic flow, the expanding nozzle will result in a decrease in temperature and pressure

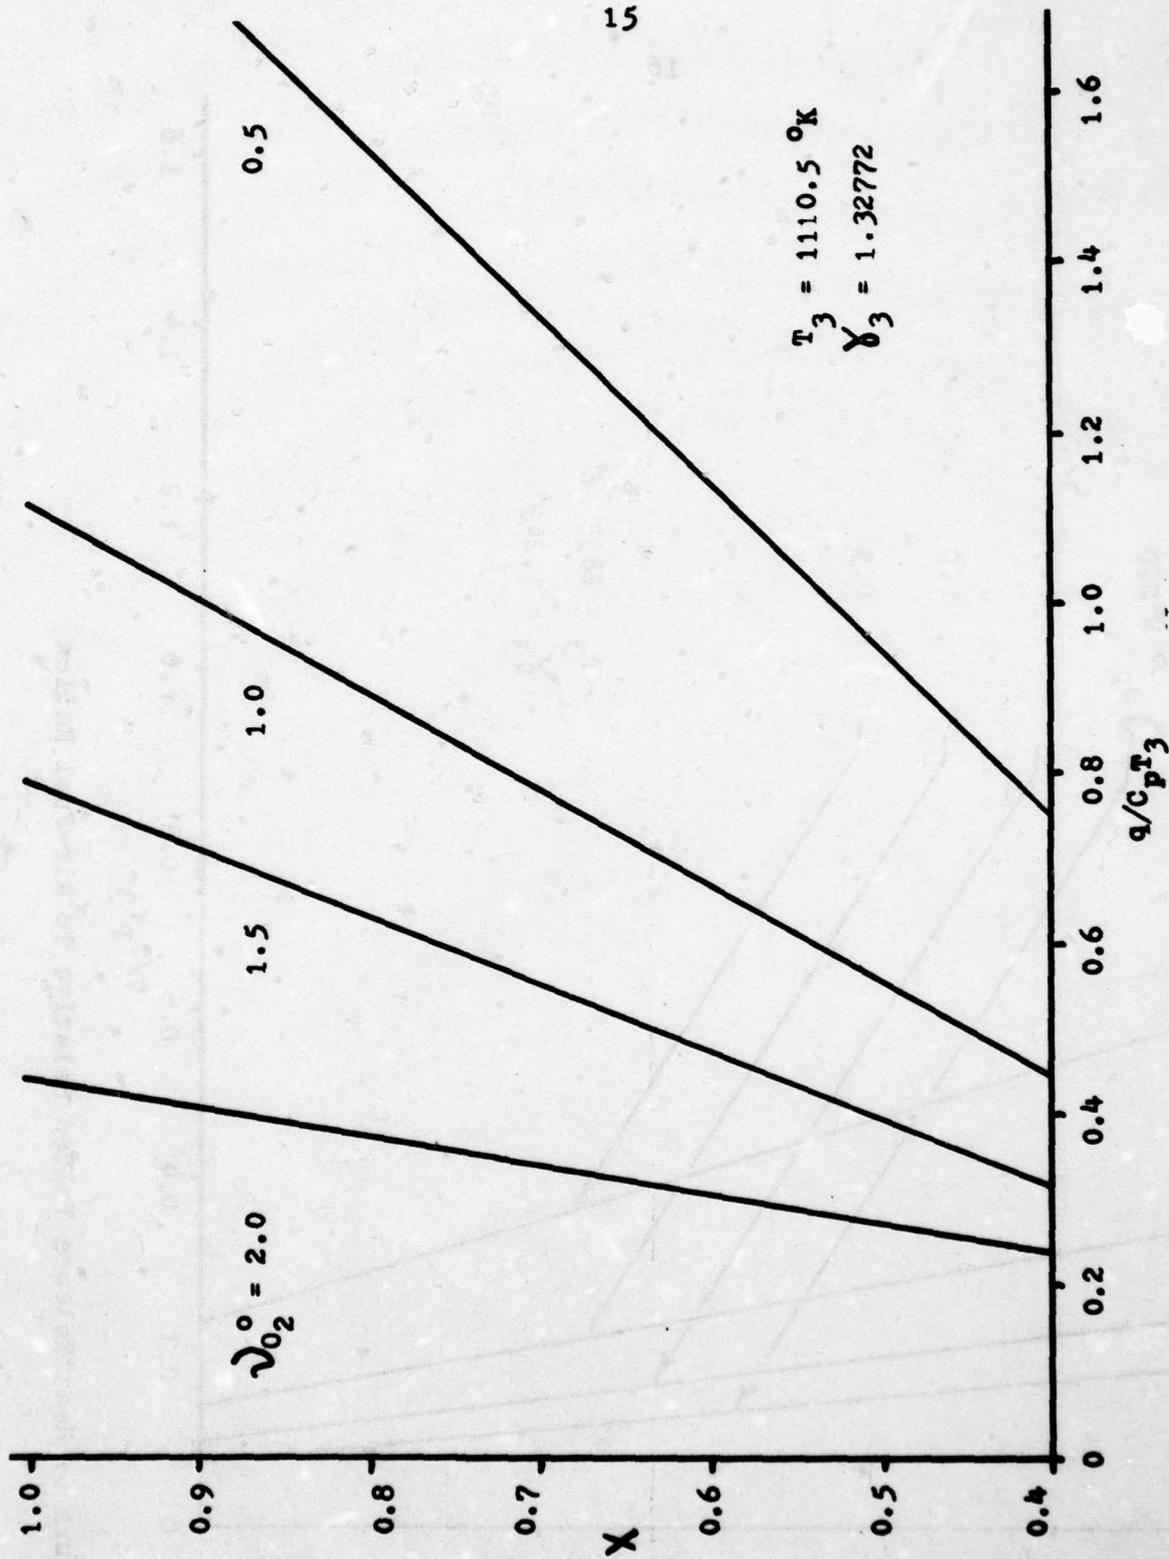


Figure 5. Heat Release Values Relative to Air-Fuel Ratios

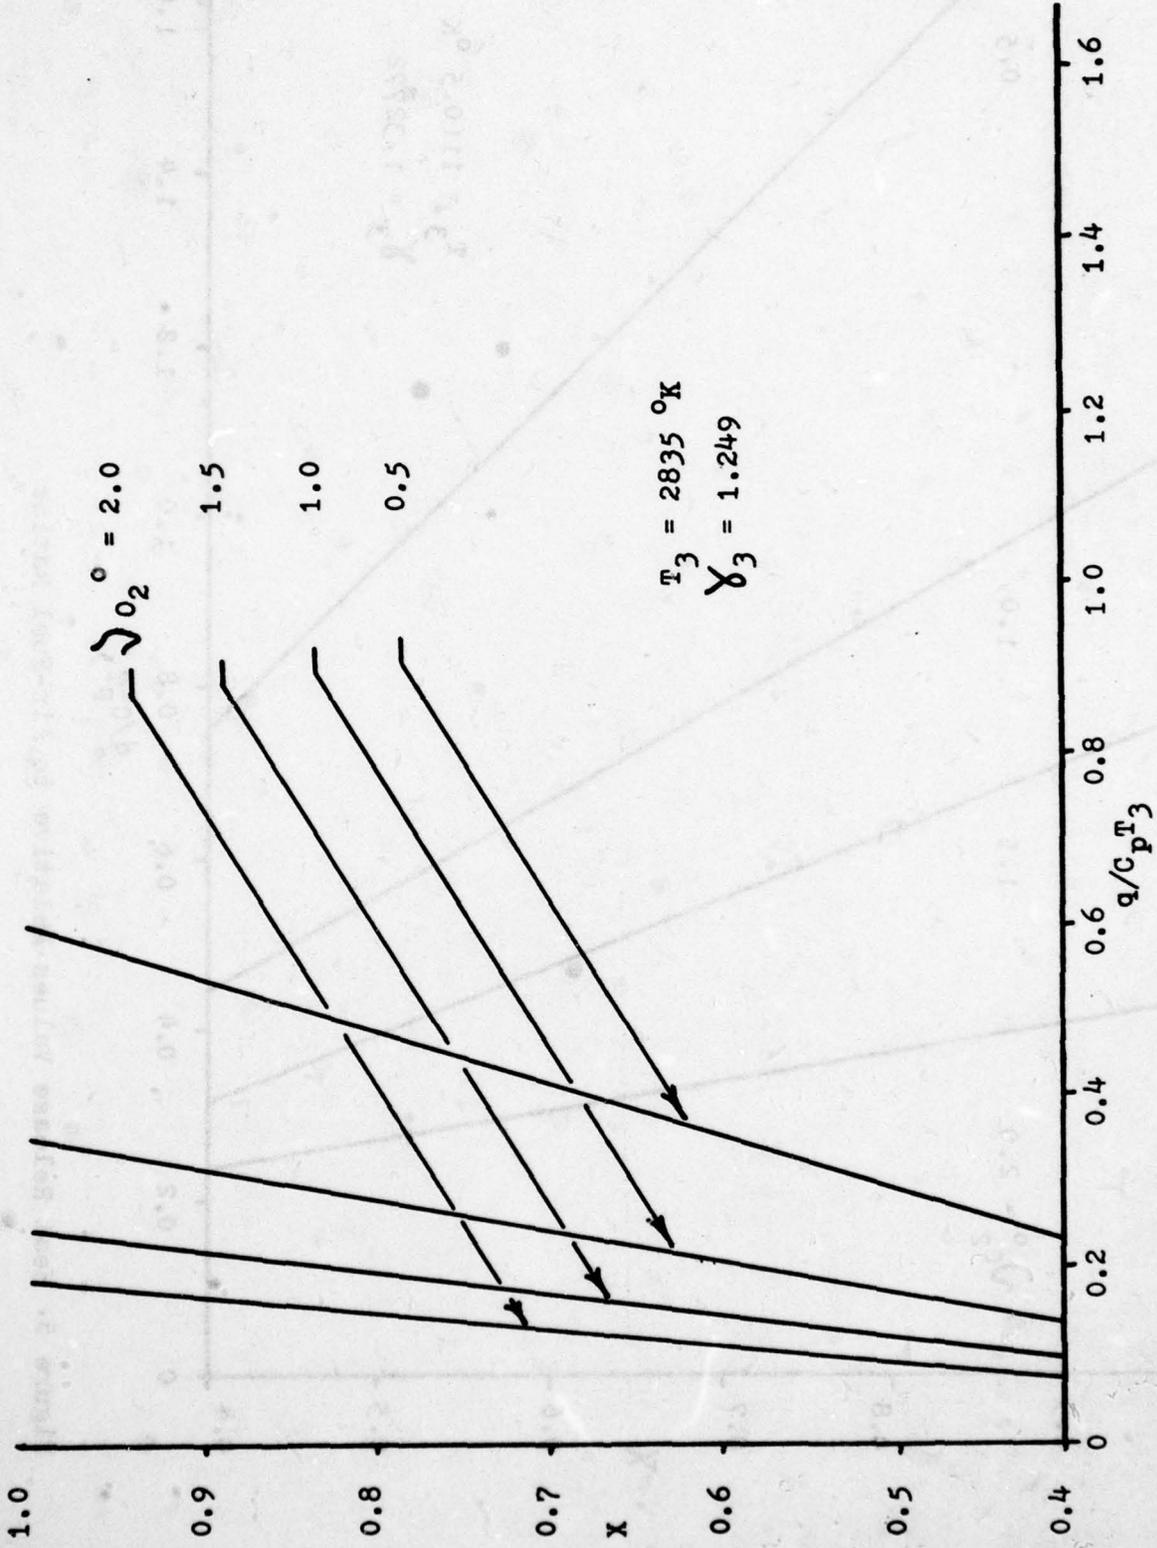


Figure 6. Heat Release Values Relative To Air-Fuel Ratios

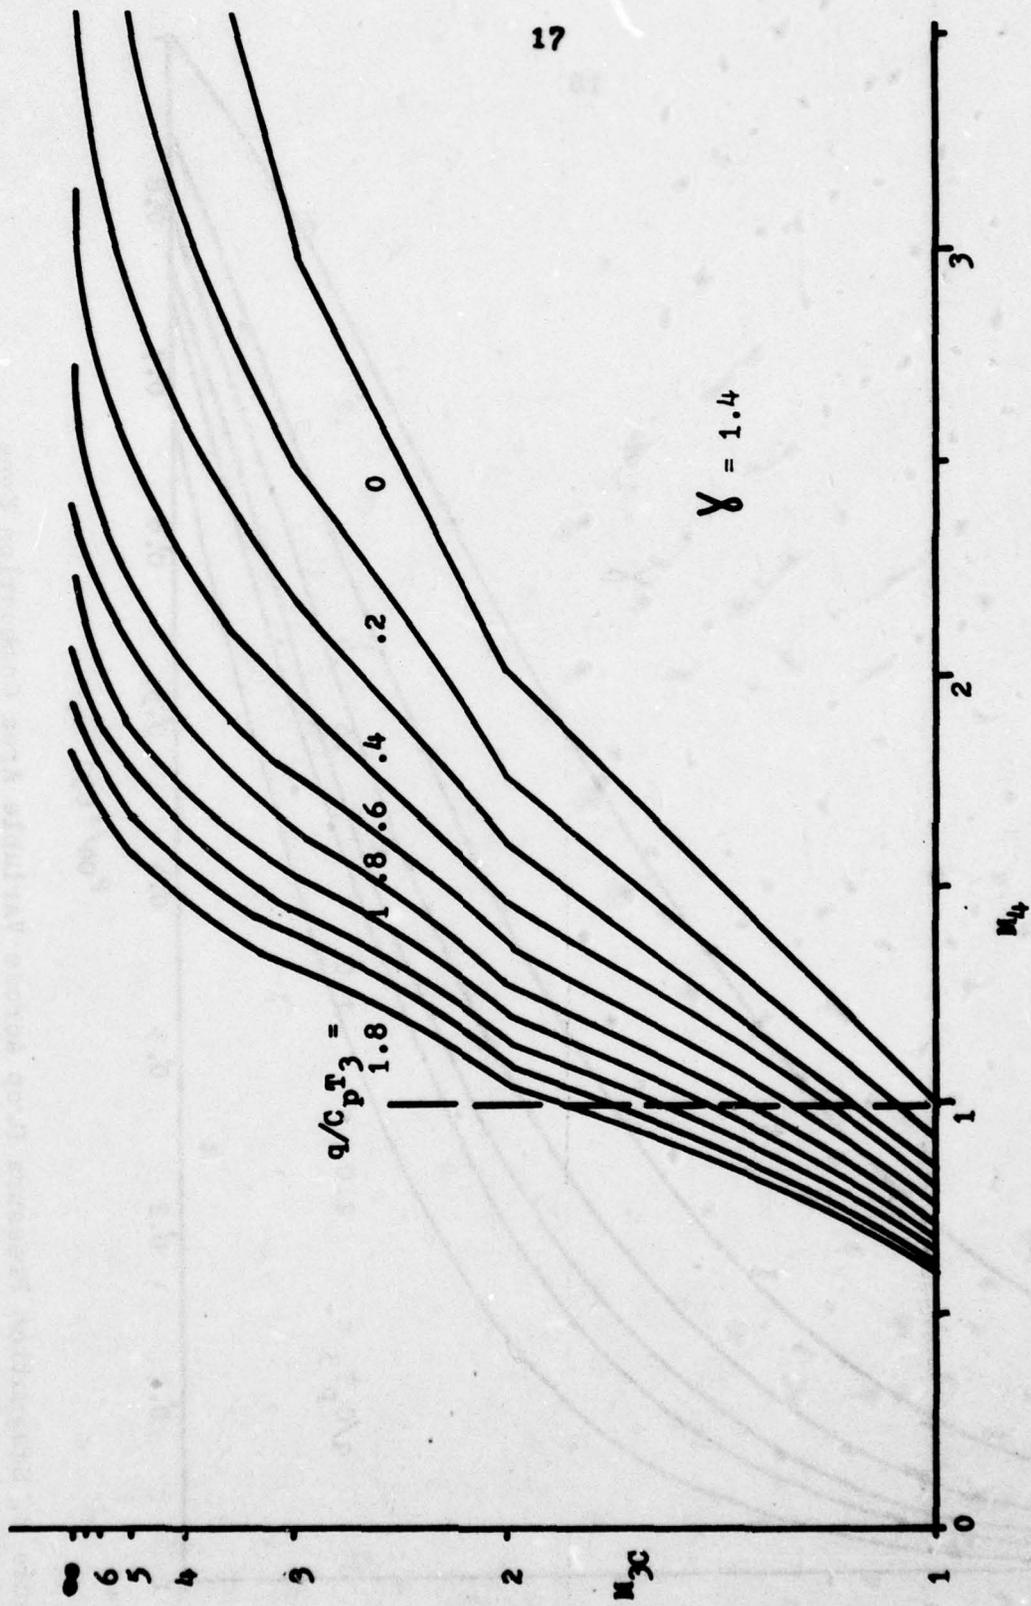


Figure 7. Supersonic Flow Required at Entrance to the Combustion Chamber as a Function of the Heat Release

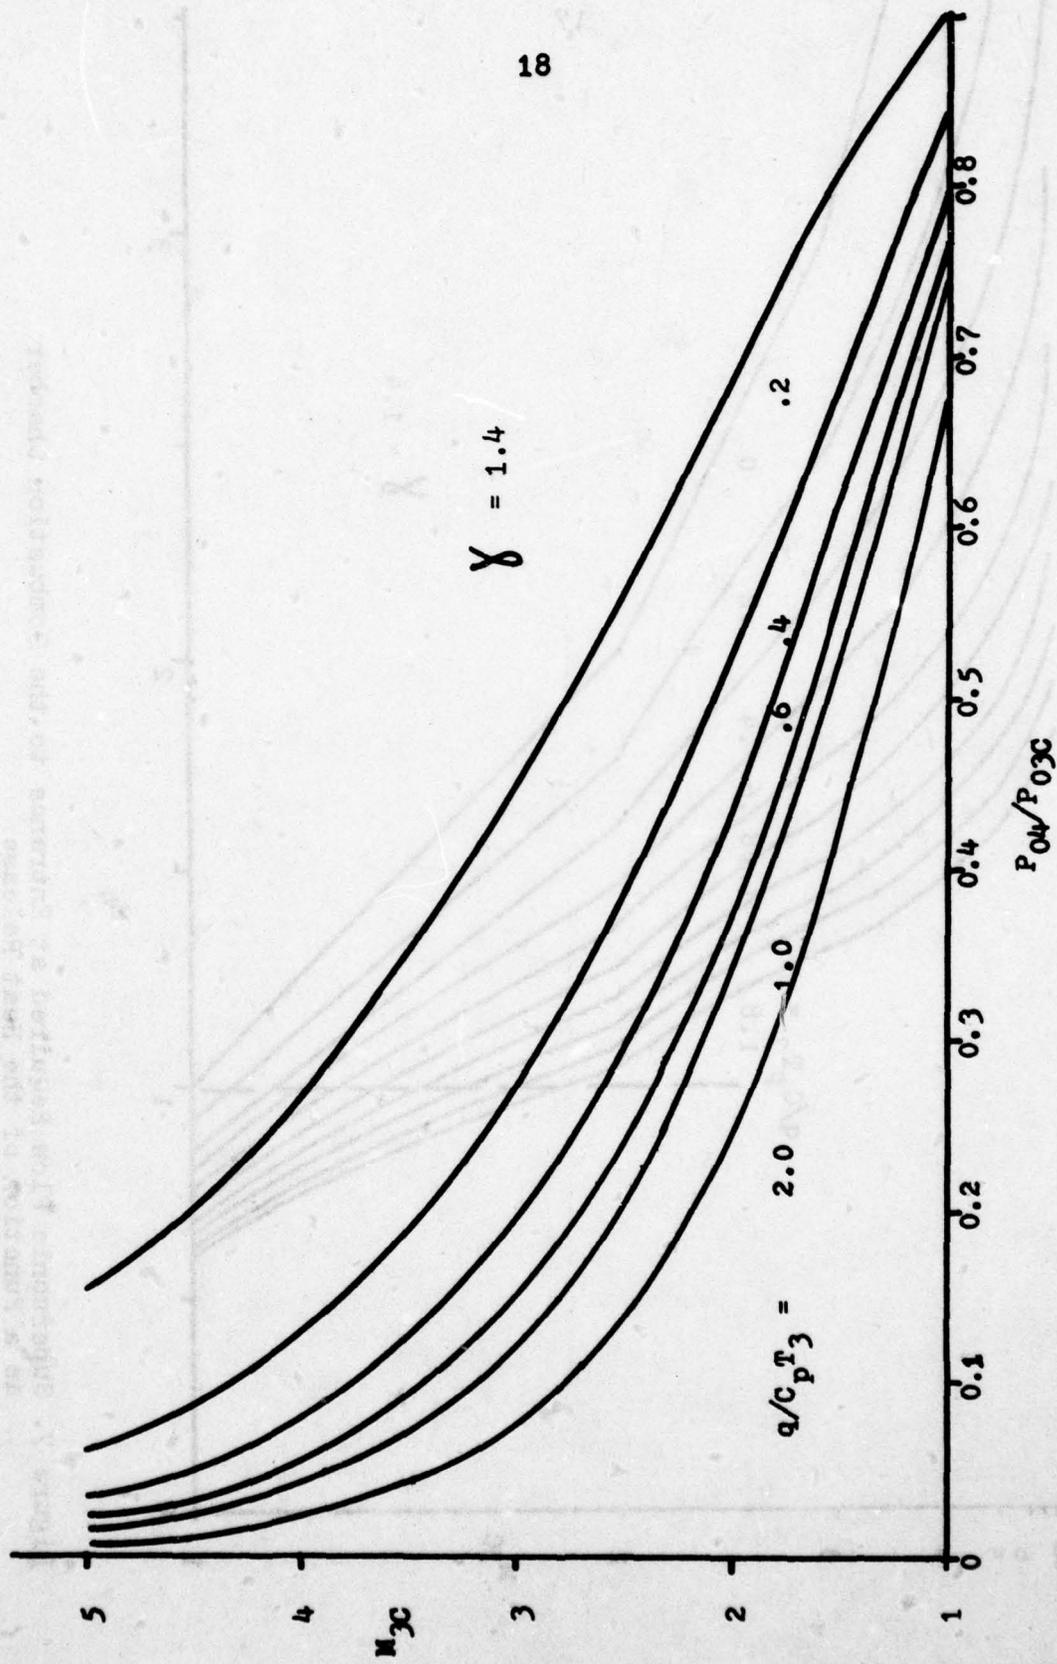


Figure 8. Stagnation Pressure Drop Across Variable Area Combustion Zone

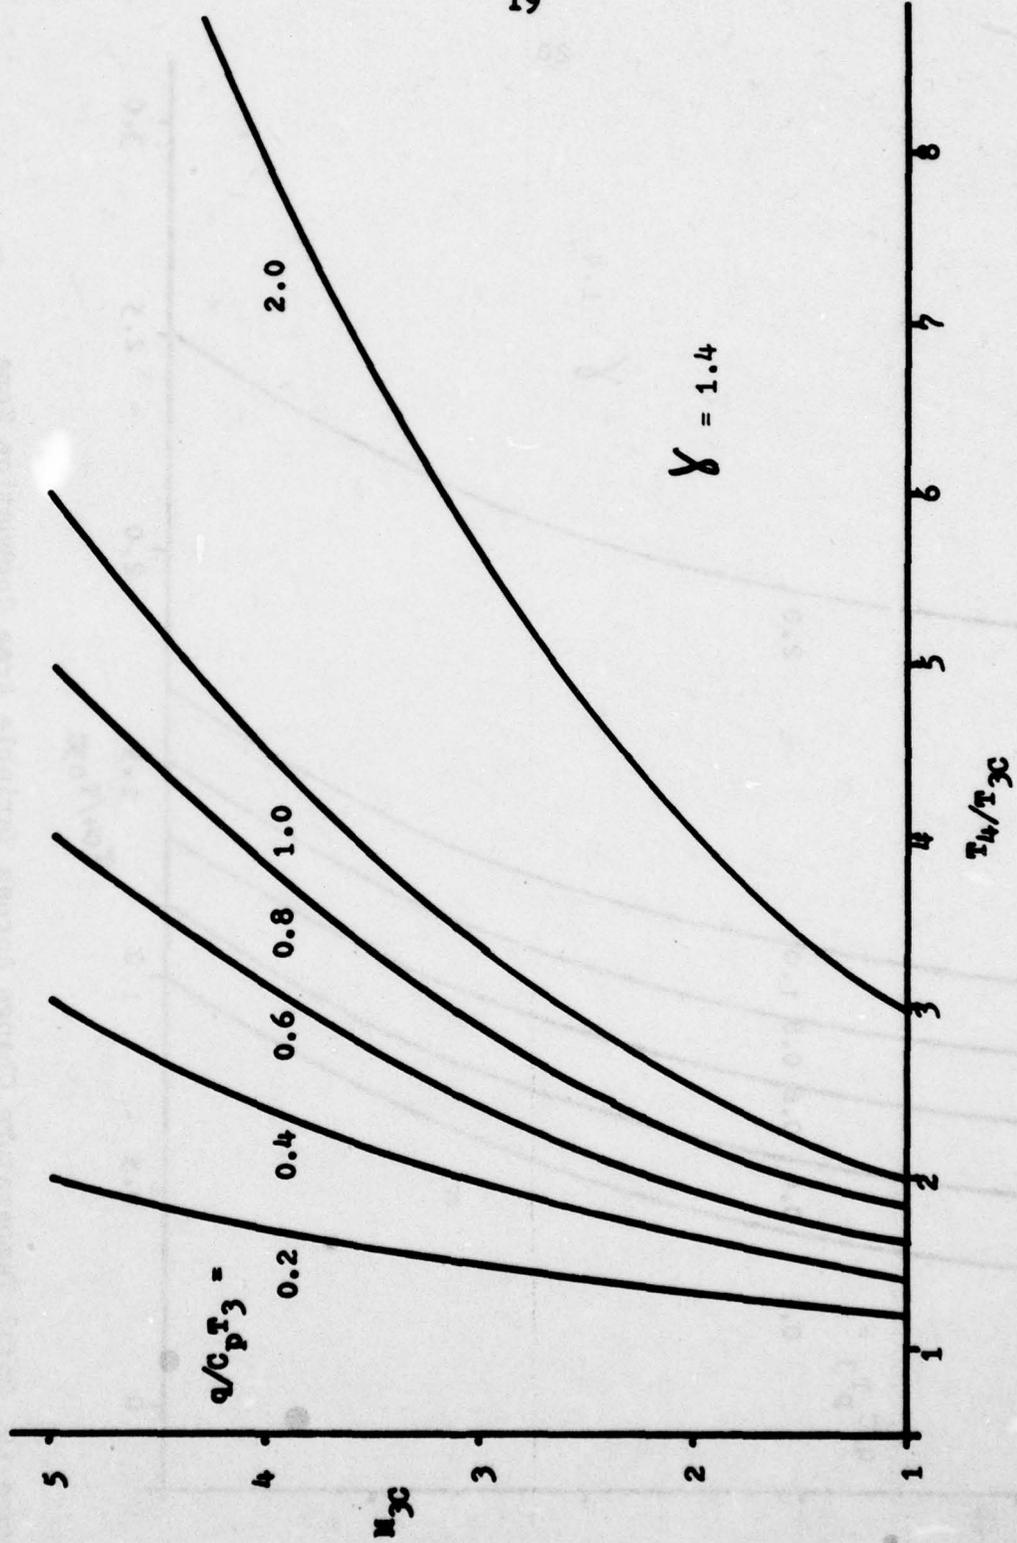


Figure 9. Temperature and Area Increase Across Variable Area Combustion Zone

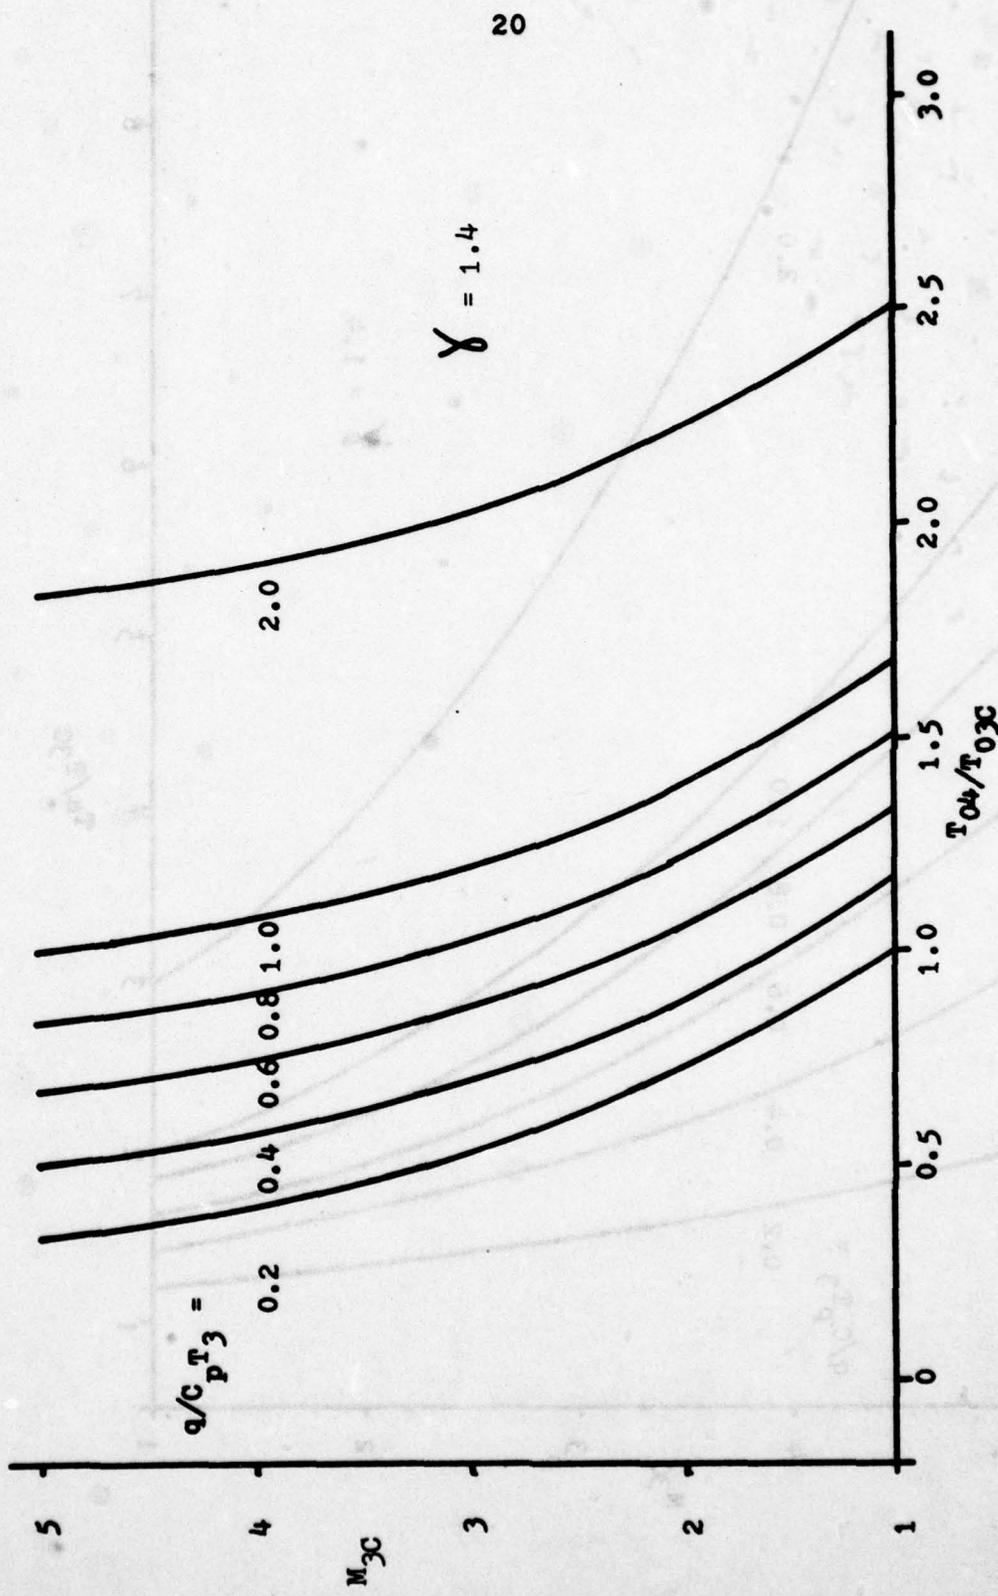


Figure 10. Total Temperature Change Across Variable Area Combustion Zone

with an appropriate increase in γ FROZ . Inspection of Figure 7 shows that for constant values of heat release coefficient at the combustion chamber exit, larger mach numbers are required at the diffuser exit to lower the resultant mach numbers at the combustion chamber exit.

SECTION VII

SUPERSONIC AIR FLOW AND HYDROGEN FUEL COMBUSTION CALCULATIONS

It was determined for the lower speeds of $M_{\infty} = 5$ and $\gamma_{O_2} = 0.5$ that the temperature reduced to 739 °K for the shocked inlet and 754.9°K for the shock free inlet. For these calculations from then on out to the nozzle exit it was assumed that ignition of the hydrogen-air mixture was achieved by other means rather than self ignition as the flow would quench below approximately 900 °K. The next procedure is to calculate the fluid properties of the hydrogen-air mixture at the combustion entrance and exit for chemically reacting gases. Consider the energy equation,

$$h_{f,abs}^{,3c} + \frac{u_{3c}^2}{2} = h_{f,abs}^{,4} + \frac{u_4^2}{2}$$

The assumption of constant pressure combustion implies that $dp=0$ and therefore $du=0$ from the momentum equation.

$$\frac{R T_{3c}}{M_{3c}} \sum_i n_{i,3c} \left[\frac{\Delta H_{f,abs}}{R T} \right]_i^{T_{3c}} = \frac{R T_4}{M_4} \sum_i n_{i,4} \left[\frac{\Delta H_{f,abs}}{R T} \right]_i^{T_{4,exit}}$$

That is, the enthalpy of the hydrogen-air mixture before combustion is equal to the enthalpy of the combustion of gases at the combustion chamber exit.

$$h_{f \text{ mix}}^{T_{3c}} = X_{\text{air}} h_{f \text{ air}}^{T_{\text{air}}} + X_{\text{H}_2} h_{f, \text{H}_2}^{T_{\text{H}_2}}$$

where X_{air} and X_{H_2} are the mass fractions of the air and hydrogen.

$$X_{\text{air}} = \frac{\nu_{\text{O}_2} (32 + 3.76(28.016)) \text{ Kg/K-mole}}{\nu_{\text{O}_2} (32 + 3.76(28.016)) + 2.016 \text{ Kg/K-mole}}$$

and

$$X_{\text{hyd}} = \frac{2.016 \text{ Kg/K-mole}}{\nu_{\text{O}_2} (32 + 3.76(28.016)) + 2.016 \text{ Kg/K-mole}}$$

$$h_{f \text{ air}} = \frac{R T_{3c}}{M_{3c}} \sum_i n_i \left(\frac{\Delta H_{f \text{ abs}}}{R T} \right)_i^{T_{\text{hyd}}} \text{ J/Kg}$$

$$h_{f \text{ hyd}} = \frac{R T_{\text{hyd}}}{M_{\text{hyd}}} \sum_i n_i \left(\frac{\Delta H_{f \text{ abs}}}{R T} \right)_{\text{H}_2}^{T=1000^\circ\text{K}} \text{ J/Kg}$$

or

$$h_{f \text{ hyd}} = \frac{8314.33 (1000)}{2.016} \left(\frac{\Delta H_{f \text{ abs}}}{R T} \right)_{\text{H}_2}^{T=1000^\circ\text{K}} \text{ J/Kg}$$

Recalling that it is assumed that the temperature of the hydrogen entering the airstream is 1000 °K or less (equivalent to the temperature of the airstream.) For example, if the airstream was 3000 °K, the hydrogen temperature is 1000 °K, and if the temperature of the airstream were 950 °K, the hydrogen temperature is given as 950 °K also. The reason for this was to avoid the possibility of dissociation

of the H_2 molecules into H atoms before they enter the airstream. This would affect the enthalpy, molecular weight of the mixture. Even though this effect would be slight the enthalpic state of hydrogen is much larger than air because of its much smaller molecular weight of 2.016 versus 28.853 for air. This could mean changes of up to 100 °K in the final computations, and it is also unlikely that H_2 would be injected into the airstream at higher temperatures.

Now to determine the temperature at the exit of the combustion chamber, values are actually just guessed at approximately 1500-2000 °K above that of the air at the entrance of the combustion chamber. The pressure of course was assumed to be constant.

The first thing to do is to calculate the mole fractions at a given pressure and temperature.

$$n_o = K^{(\frac{1}{2} O_2)} \sqrt{n_{O_2}}$$

$$n_{H_2} = \left\{ \sqrt{\left(\frac{A}{B}\right)^2 + \frac{1 - 0.5 n_o}{B}} - \frac{A}{B} \right\}^2$$

where

$$A = 0.25 \left[K^{(\frac{1}{2} H_2)} + \left(\frac{n_{O_2}^g + n_{N_2}^g}{n_{H_2}^g} + 1 \right) \left(K^{(\frac{1}{2} H_2)} + K^{(OH)} \sqrt{n_{H_2}} \right) \right]$$

and

$$B = 0.5 + \left(\frac{n_{O_2}^g + n_{N_2}^g}{n_{H_2}^g} + 0.5 \right) \left(1 + K^{(H_2O)} \sqrt{n_{O_2}} \right)$$

$$n_H = K^{(\frac{1}{2} H_2)} \sqrt{n_{H_2}}$$

$$n_{OH} = K^{(OH)} \sqrt{n_{O_2}} \sqrt{n_{H_2}}$$

$$n_{H_2O} = K^{(H_2O)} \sqrt{n_{O_2}} n_{H_2}$$

$$n_{N_2} = \left\{ \sqrt{\left[0.25 K^{(NO)} \sqrt{n_{O_2}} \right]^2 + \left(n_{H_2O} + n_{H_2} + 0.5 [n_{OH} + n_H] \frac{n_{N_2}^g}{n_{H_2}^g} - 0.25 K^{(NO)} \sqrt{n_{O_2}} \right)^2} \right.$$

and

$$n_{NO} = K^{(NO)} \sqrt{n_{O_2}} \sqrt{n_{N_2}}$$

These calculations are repeated with improved values of the estimated mole fractions of oxygen until

$$\left| \frac{n_{O_2}^g}{n_{H_2}^g} - \nu_{O_2} \right| < 0.001 \quad \frac{n_{O_2}^g}{n_{H_2}^g} = \frac{n_{O_2} + 0.5(n_{OH} + n_{H_2O} + n_{NO})}{n_{H_2O} + n_{H_2} + 0.5(n_{OH} + n_H)}$$

Successively closer values of the enthalpic state at the exit of the combustion are determined until an accuracy of

$$\left| \frac{h_{f, \text{mix}}^{T_4} - h_{f, \text{mix}}^{T_{3c}}}{h_{f, \text{mix}}^{T_4}} \right| \leq 0.01 \quad \text{is achieved.}$$

Since again the mach number can be calculated in the same manner as at the nozzle throat. Viewing the results of the calculations, it is evident that water and nitrogen are the final chemical constituents provided the temperatures are not too great and the hydrogen, oxygen and nitrogen atoms are not allowed to reform into molecules.

SECTION VIII

ISENTROPIC FLOW CALCULATIONS AT NOZZLE

The most desirable or ideal state at the exit of the engine would be that no underexpanded flow, $P_{\text{exit}} < P_1$ or overexpanded flow where $P_{\text{exit}} > P_1$ would exit the end of the nozzle. For the purpose of calculating the ideal nozzle flow the pressure was assumed equal to that entering the engine behind the bow shock wave. $P_5 = 0.02$ for $M_1 = 5$ and $P_5 = 0.04$ for $M_1 = 8$. Also it was assumed that the flow went from the combustion chamber exit to the nozzle exit isentropically. A reasonably valid assumption provided the hydrogen gas combustion reaction is complete. That is, the hydrogen gas has released all its heat content within the combustion chamber and no additional heat is released within the nozzle exit. The decrease in temperature and resulting increase in velocity of the gases is a transformation of molecular random motion into more ordered and directional motion.

The entropy at the exit of the combustion chamber can be determined as the temperature, pressure and mole fractions are known.

$$\left(\frac{s}{R_2}\right)^{T_4} = \frac{m_2}{m_4} \left[\sum_i n_{i,4} \left(\frac{s^{P=1}}{R}\right)_i^{T_4} - \sum_i n_{i,4} - \ln P_4 \right]$$

Pressure and temperature will decrease for nozzle expansion and the velocity will increase. The frozen flow mach number and γ are calculated at station 4 and using these values the estimates at station 5 are made with perfect gas isentropic relationships.

$$\left. \frac{P_5}{P_{05}} \right]_{M_5} = \left. \frac{P_5}{P_4} \frac{P_4}{P_{04}} \right]_{M_4}$$

where

$$\frac{P_{04}}{P_4} = \left[1 + \frac{\gamma-1}{2} M_4^2 \right]^{\gamma/\gamma-1}$$

Also

$$M_5 = \left\{ \left(\left(\frac{P_{05}}{P_5} \right)^{\gamma-1/\gamma} - 1 \right) \frac{2}{\gamma-1} \right\}^{1/2}$$

After estimating M_5 the temperature corresponding to the pressure is determined.

$$T_5 = \frac{T_5}{T_{05}} \frac{T_{04}}{T_4} T_4 = \frac{\left[1 + \frac{\gamma-1}{2} M_4^2 \right]}{\left[1 + \frac{\gamma-1}{2} M_5^2 \right]} T_4$$

Keeping in mind that the value of γ used is that frozen from the combustion chamber exit. The temperature and pressure are adjusted accounting for chemical reactions and with this estimate of temperature the mole fractions from the previous equations given are calculated.

The entropy is,

$$\left(\frac{S}{R_2} \right)^{T_5} = \frac{m_2}{m_4} \left[\sum_i n_{i,4} \left(\frac{S}{R} \right)_i^{T_5} - \sum_i n_{i,5} \ln n_{i,5} - \ln P_5 \right]$$

The temperature T_5 is adjusted until the entropy at station 5 is within 0.01% of that at station 4. The corresponding absolute enthalpy is then determined.

$$\left(\frac{h_{f,abs}}{R_2 T_2}\right)^{T_5} = \frac{m_2}{m_5} \frac{T_5}{T_2} \sum_i n_{i,5} \left(\frac{\Delta H_{f,abs}}{R T}\right)^{T_5}$$

$$u_5^{CALC} = \left\{ \left[\left(\frac{h_{f,abs}}{R_2 T_2}\right)^{T_4} - \left(\frac{h_{f,abs}}{R_2 T_2}\right)^{T_5} \right] \frac{2(8314.33) T_4}{m_4} + u_4 \right\}^{1/2}$$

$$y_5^{FROZ} = \frac{\sum_i n_{i,5} \left(\frac{c_p}{R}\right)^{T_5}}{\sum_i n_{i,5} \left(\frac{c_p}{R}\right)^{T_5} - 1}$$

$$M_5^{FROZ} = \frac{u_5^{CALC}}{\sqrt{y_5^{FROZ} \frac{R}{m_5} T_5}}$$

SECTION IX

CALCULATION OF AREA RATIOS FROM COMPUTED FLOW PROPERTIES

The area ratios can now be determined from the conservation of mass and the equation of state.

$$(\rho u A)_1 = (\rho u A)_2 \quad \rho = \frac{P}{T} \frac{m}{R}$$

$$\text{or } \frac{A_2}{A_1} = \frac{T_2}{T_1} \frac{P_1}{P_2} \frac{m_1}{m_2} \frac{u_2}{u_1}$$

Note that a specific area cannot be found for any one location. A reference area must be established. The sonic throat is chosen as the reference area as it supposedly represents the smallest area. The area ratio at the throat is given and is that location where the flow is sonic ($M = 1$).

SECTION X

SPECIFIC NET THRUST AND TSFC

The specific net thrust (SNT) and thrust specific fuel consumption (TSFC) are determined as follows:

$$\frac{T}{\dot{m}_a} = (1 + f) u_5 - u_1 \quad P_a = P_e$$

\dot{m}_a - mass flow rate of air through the engine configuration

f - fuel air ratio

u_5 - exit velocity of burned gases

u_1 - flight velocity of the engine (initially specified)

$$f = \frac{\text{mass fuel / per unit time}}{\text{mass air / per unit time}} = \frac{2.016 \text{ Kg / K-mole-unit time}}{V_{O_2} \left(32 + (3.76)(28.016) \right) \frac{\text{Kg}}{\text{K-mole-unit time}}}$$

$$f = \frac{2.016}{0.5(32 + 3.76(28.016))} = 0.0293578 \text{ for } V_{O_2} = 1/2$$

$$f = \frac{2.016}{2(32 + 3.76(28.016))} = 0.0073394 \text{ for } V_{O_2} = 2$$

$$TSFC = \frac{\dot{m}_f}{T} = f / T / \dot{m}_a$$

SECTION XI

CONCLUDING COMMENTS

The resulting specific net thrusts and associated TSFC are rather high. As would be expected the greatest amount of thrust would be provided for the richest mixture of hydrogen to air at $\nu_{O_2}^0 = 0.5$. The thrust falls off dramatically for leaner mixtures and for the shocked inlet at $M_\infty = 10$ for $\nu_{O_2}^0 = 2$ negative thrust or drag is provided.

Rather encouraging results are obtained for the shocked inlet. The thrust values are reasonably high and the associated TSFC's are almost double that of some typical ramjets (designed and in operation.) This type of design would require that the stagnation pressure drop such that P_{3C}/P_{03C} , P_4/P_{04} , and P_5/P_{05} be below values of 0.528 or it would not be possible to obtain supersonic flow in the aft side of the diffuser. This can be determined from perfect gas tables, shock tables, and the graphs included herein for stagnation pressure drops across the combustion chamber.

For $M_\infty = 5$, $\nu_{O_2}^0 = 0.5$, and the shocked inlet,

$$P_{3C}/P_{03C} = 0.1113 \quad P_4/P_{04} = 0.3969 \quad P_5/P_{05} = 0.10994$$

all of which are below $P/P_0 = 0.528$. This means the flow will indeed go supersonic. Similarly, the other conditions can be checked.

TABLE 1 CALCULATED SNT AND TSFC VALUES

SHOCKED INLET ENGINE

M_∞	α_2°	τ/m_a (N/Kg/sec)	TSFC (Kg/hr/N)
5	0.5	341.334	0.3096
5	2	110.312	0.2395
10	0.5	441.404	0.2394
10	2	-359.567	NA

SHOCK FREE ENGINE

M_∞	α_2°	τ/m_a (N/Kg/sec)	TSFC (Kg/hr/N)
5	0.5	901.037	0.1173
5	2	230.790	0.1145
10	0.5	739.172	0.1430
10	2	-12.412	NA

SOME TYPICAL VALUES OF TSFC FOR OTHER TYPES OF ENGINES ARE

RAMJET	0.173 - 0.265 (N/Kg/sec)	M = 2
TURBOJETS	0.0763 - 0.1078 (N/Kg/sec)	STATIC
TURBOFANS	0.0509 - 0.0611 (N/Kg/sec)	STATIC

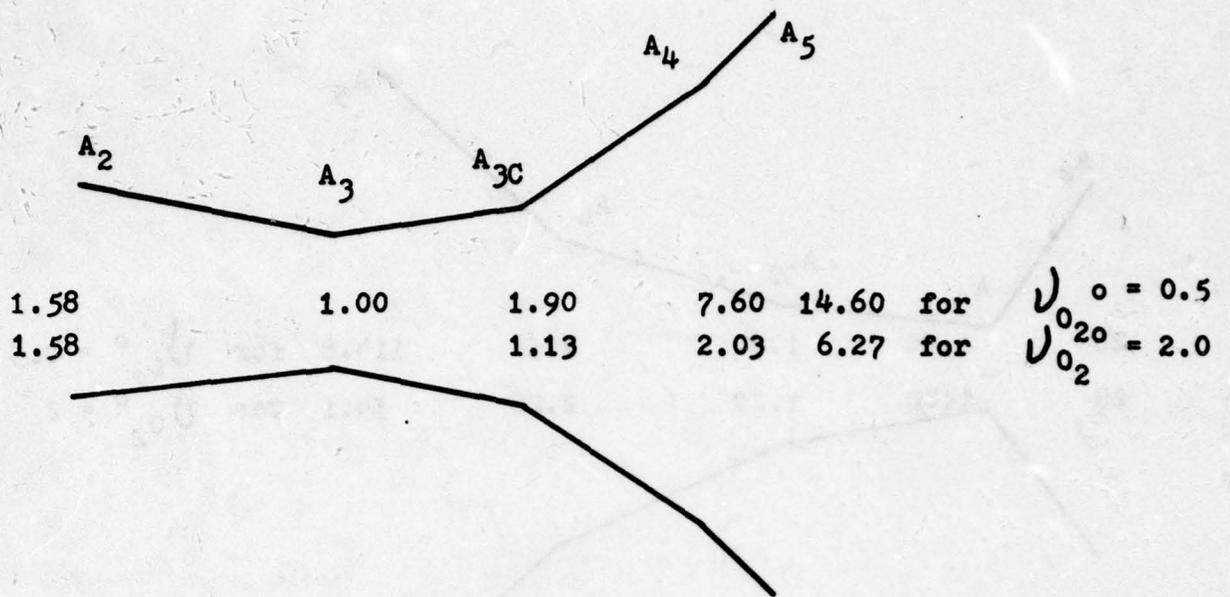


Figure 11. Shocked Inlet for $M_\infty = 5$, $\nu_{02}^0 = 0.5, 2.0$ with Area Relationships

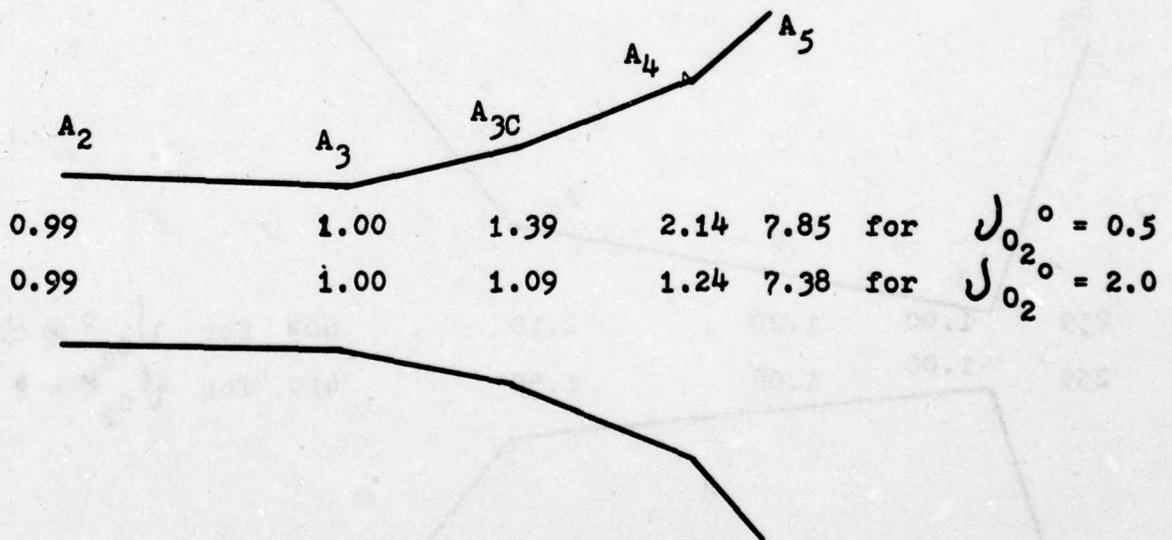


Figure 12. Shocked Inlet for $M_\infty = 10$, $\nu_{02}^0 = 0.5, 2.0$ with Area Relationships

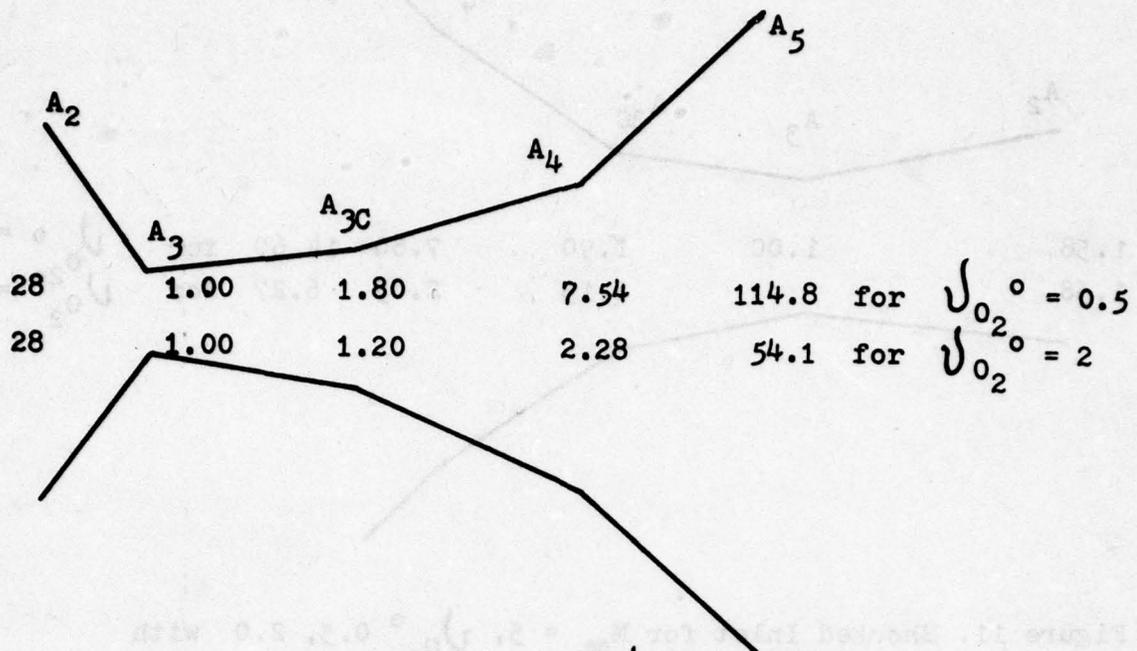


Figure 13. Shock Expelled for $M_\infty = 5$, $v_{0_2}^0 = 0.5, 2$ with Area Relationships

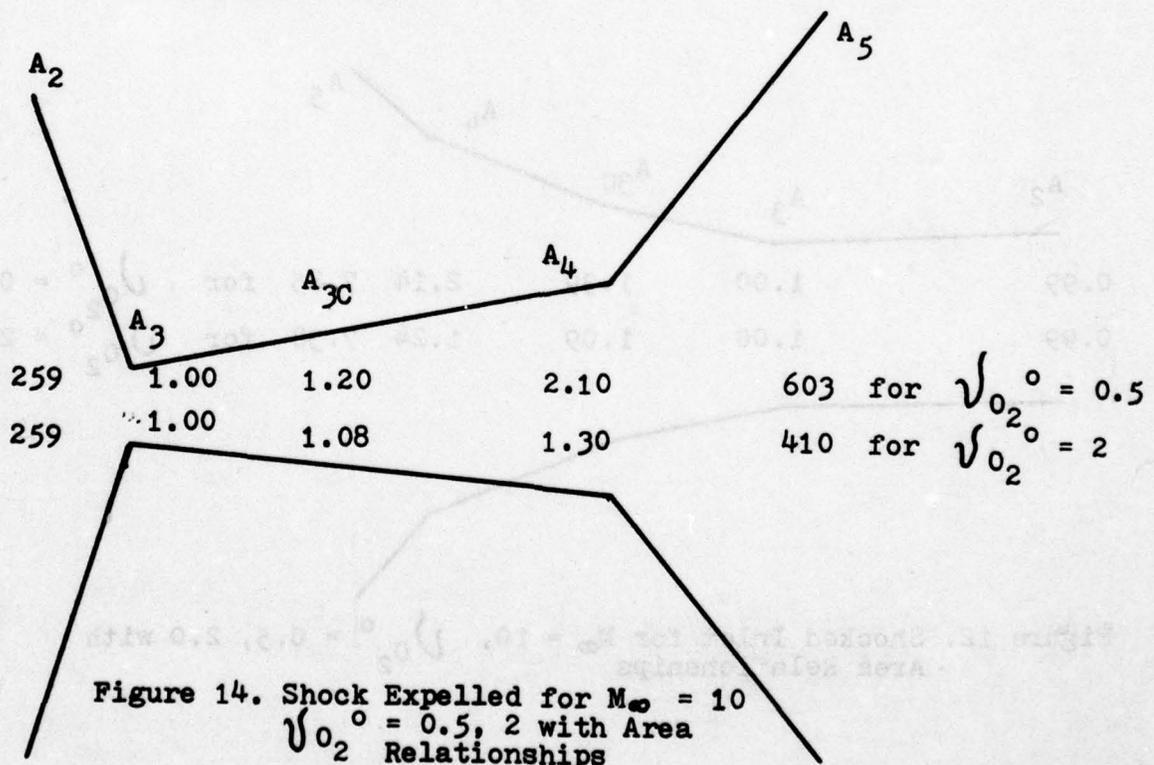


Figure 14. Shock Expelled for $M_\infty = 10$, $v_{0_2}^0 = 0.5, 2$ with Area Relationships

While the values of thrust and TSFC for the shock free engine look to be promising, it must also be considered that the static pressures of up to 272 atmospheres would be prohibitive. In fact, it would be necessary to open up the diffuser rather than closing it to provide permissible operating pressures. Also, to prevent choking in the combustion chamber the engine would have to be opened even more. This would require a tremendously large engine with a large associated wave drag. As such, only the shocked inlet configuration appears to be promising.

A method of injecting and combusting the gases across oblique shock waves in the combustion chamber for the shocked inlet configuration should be investigated as to its feasibility. Also, the same methods outlined in this paper could be used to investigate the feasibility of an external ramp over which combustion would take place on the aft side.

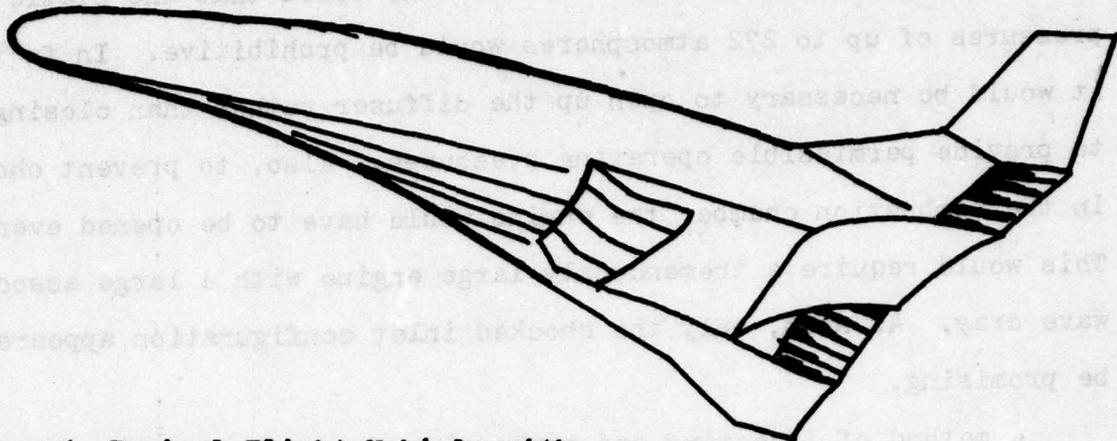


Figure 15. Typical Flight Vehicle with
Supersonic Ramjet Engine

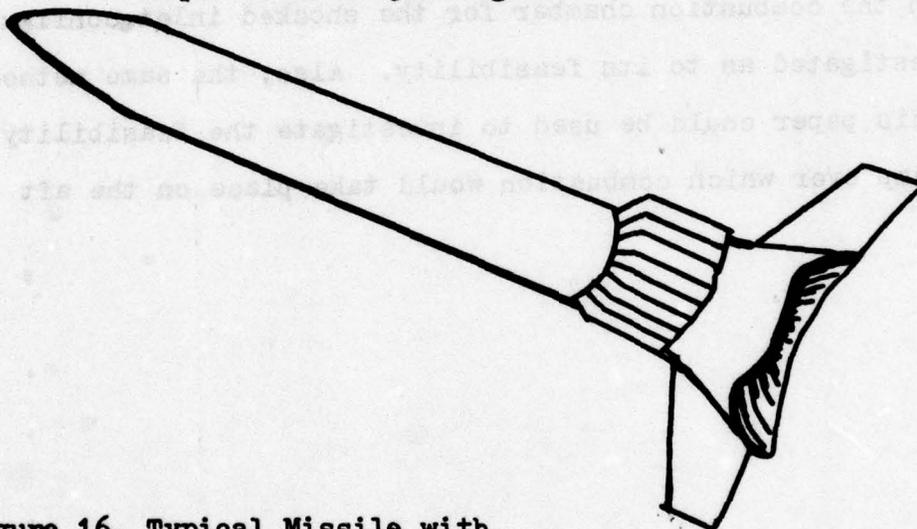


Figure 16. Typical Missile with
Supersonic Ramjet Engine

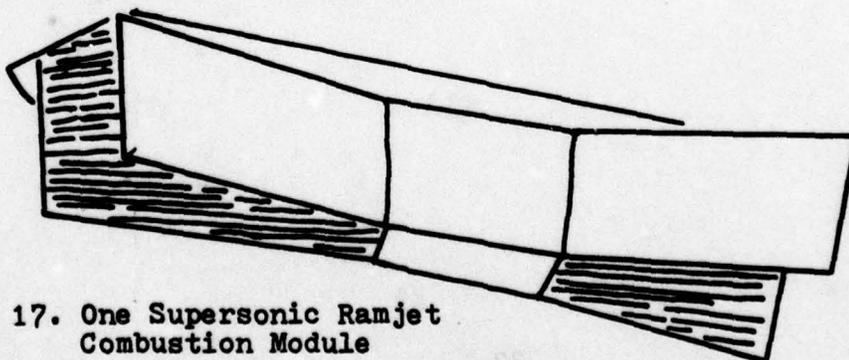


Figure 17. One Supersonic Ramjet
Combustion Module

TABLE 2 COEFFICIENTS $a^{(j)}(T)$ OF EQUILIBRIUM CONSTANTS $K_p^{(j)}(T)$

T (K)	$a^{(1)}(T)$	$a^{(2)}(T)$	$a^{(3)}(T)$	$a^{(4)}(T)$
1100	14.038	39.745	6.4760	0.11423
1200	14.367	39.729	6.3877	0.10931
1300	14.619	40.710	6.3155	0.10477
1400	14.853	40.101	6.2485	0.10113
1500	15.049	40.491	6.2436	0.09743
1600	15.252	41.013	6.1913	0.09377
1700	15.428	41.244	6.1493	0.09022
1800	15.102	41.314	6.1027	0.08672
1900	15.757	41.471	6.0574	0.08327
2000	15.653	41.480	6.0105	0.08007
2100	16.002	41.452	5.9771	0.07611
2200	16.119	41.475	5.9440	0.05714
2300	16.211	41.434	5.9110	0.05444
2400	16.275	41.354	5.8783	0.05182
2500	16.351	41.279	5.8457	0.04931
2600	16.405	41.207	5.8133	0.04683
2700	16.451	41.112	5.7810	0.04440
2800	16.495	40.993	5.7490	0.04203
2900	16.543	40.852	5.7171	0.03970
3000	16.585	40.719	5.6854	0.03752
3100	16.602	40.553	5.6594	0.03528
3200	16.620	40.391	5.6334	0.03307
3300	16.635	40.225	5.6076	0.03095
3400	16.642	40.051	5.5820	0.02883
3500	16.645	39.901	5.5564	0.02684
3600	16.645	39.738	5.5310	0.02482
3700	16.638	39.575	5.5056	0.02283
3800	16.625	39.413	5.4804	0.02086
3900	16.612	39.256	5.4553	0.01892
4000	16.602	39.087	5.4303	0.01700
4100	16.588	38.904	5.4051	0.01503
4200	16.573	38.726	5.3800	0.01307
4300	16.557	38.544	5.3549	0.01113
4400	16.539	38.363	5.3298	0.00922
4500	16.504	38.225	5.3041	0.00731
4600	16.479	38.046	5.2784	0.00542
4700	16.453	37.868	5.2527	0.00352
4800	16.423	37.690	5.2271	0.00169
4900	16.392	37.517	5.2016	0.00000
5000	16.359	37.334	5.1762	0.00000
5100	16.325	37.159	5.1509	0.00000
5200	16.289	36.985	5.1256	0.00000
5300	16.240	36.811	5.1005	0.00000
5400	16.206	36.637	5.1274	0.00000
5500	16.163	36.463	5.1004	0.00000
5600	16.122	36.292	5.0755	0.00000
5700	16.079	36.118	5.0507	0.00000
5800	16.035	35.949	5.0240	0.00000
5900	15.991	35.780	5.0234	0.00000
6000	15.943	35.613	5.0081	0.00000

$\frac{\Delta G^{\circ}(j)}{T}$	2592	29675	4675	-2073.
$b^{(j)}$	0.5	0.5	0.0	-0.5

$$K_p^{(j)}(T) = \frac{a^{(j)}(T_1) \left[\frac{a^{(j)}(T_2)}{a^{(j)}(T_1)} \right]^{\frac{T_2 - T_1}{T_1 T_2}} \cdot \exp \left[-\frac{\Delta G^{\circ}(j)}{RT_1} \right] \cdot (1/T_1)^{b^{(j)}} \cdot \exp \left[\frac{\Delta H^{\circ}(j)}{RT_1} \right]$$

$T_1 < T < T_2 < 10^4$

TABLE 3 COEFFICIENTS $a^{(j)}(T_1)$ OF EQUILIBRIUM CONSTANTS $K_p^{(j)}(T_1)$

T_1 (K)	$\ln \frac{K_p^{(j)}(T_1)}{a^{(j)}(T_1)}$ (M ₂)	$\ln \frac{K_p^{(j)}(T_1)}{a^{(j)}(T_1)}$ (M ₃)	$\ln \frac{K_p^{(j)}(T_1)}{a^{(j)}(T_1)}$ (M ₄)
1100	35.800	4.2716	1.7175 -5
1200	37.353	4.2482	1.6580 -5
1300	37.909	4.2315	1.6124 -5
1400	38.271	4.2432	1.5727 -5
1500	38.555	4.2623	1.5337 -5
1600	38.873	4.2793	1.5341 -5
1700	39.122	4.2938	1.5341 -5
1800	39.322	4.3079	1.5121 -5
1900	39.444	4.3194	1.5048 -5
2000	39.523	4.3256	1.4985 -5
2100	39.674	4.3303	1.4977 -5
2200	39.765	4.3460	1.4988 -5
2300	39.813	4.3531	1.4987 -5
2400	39.845	4.3576	1.5022 -5
2500	39.868	4.3620	1.5050 -5
2600	39.865	4.3651	1.5037 -5
2700	39.851	4.3669	1.5159 -5
2800	39.845	4.3687	1.5236 -5
2900	39.809	4.3695	1.5300 -5
3000	39.754	4.3705	1.5366 -5
3100	39.701	4.3709	1.5441 -5
3200	39.666	4.3705	1.5526 -5
3300	39.630	4.3695	1.5615 -5
3400	39.586	4.3687	1.5703 -5
3500	39.539	4.3669	1.5786 -5
3600	39.488	4.3647	1.5870 -5
3700	39.428	4.3620	1.5956 -5
3800	39.369	4.3564	1.6040 -5
3900	39.302	4.3499	1.6128 -5
4000	39.220	4.3423	1.6214 -5
4100	39.157	4.3309	1.6297 -5
4200	39.083	4.3180	1.6383 -5
4300	39.013	4.3022	1.6470 -5
4400	38.950	4.2856	1.6570 -5
4500	38.888	4.2694	1.6699 -5
4600	38.830	4.2537	1.6746 -5
4700	38.775	4.24070	1.6835 -5
4800	38.721	4.24009	1.6922 -5
4900	38.675	4.2343	1.7014 -5
5000	38.628	4.2377	1.7101 -5
5100	38.582	4.2315	1.7191 -5
5200	38.536	4.2250	1.7280 -5
5300	38.501	4.2284	1.7371 -5
5400	38.463	4.2324	1.7461 -5
5500	38.428	4.2340	1.7552 -5
5600	38.401	4.2475	1.7540 -5
5700	38.374	4.2405	1.7780 -5
5800	38.351	4.2335	1.7810 -5
5900	38.332	4.2367	1.7900 -5
6000	38.317	4.2398	1.7985 -5

$$\left(\frac{d \ln K_p^{(j)}}{dT}\right)^{(j)} \quad 56613 \quad 10799 \quad -35970$$

$$w^{(j)} \quad 0.5 \quad 0.0 \quad 0.125$$

$$K_p^{(j)}(T) = a^{(j)}(T_1) \left[\frac{a^{(j)}(T_2 + 100)}{a^{(j)}(T_1)} \right]^{\left(\frac{T-T_1}{100}\right)} \cdot \exp[-(u_{j0}/R)(j)] \cdot (1/R_j) \left[\exp^{u_{j0}(j)} \right]$$

$$T_1 < T < T_2 + 100$$

TABLE 4 EQUILIBRIUM CONSTANTS, $K^{(j)}_{atm} \Delta \nu(j)$

T (K)	$K_p^{(3A_2)}_{atm} \Delta \nu = 0$	$K_p^{(3O_2)}_{atm} \Delta \nu = 0$	$K^{(NH)}_{atm} \Delta \nu = 1/2 O_2 = OH$	$K_p^{(H_2O)}_{atm} \Delta \nu = H_2O$
1100	2.5704 -8	2.4774 -9	9.1633 -2	7.6384 6
1200	1.9634 -7	2.4489 -8	1.2772 -1	7.9250 7
1300	1.1015 -6	1.7579 -7	1.7378 -1	1.1584 7
1400	4.0417 -6	9.3972 -7	2.2204 -1	2.4233 6
1500	1.7498 -5	4.0272 -6	2.7606 -1	5.3068 5
1600	5.4075 -5	1.4308 -5	3.3343 -1	1.5136 5
1700	1.4625 -4	4.4351 -5	3.9604 -1	5.0003 4
1800	3.5645 -4	1.2078 -4	4.5394 -1	1.8481 4
1900	7.9068 -4	2.9500 -4	5.1761 -1	7.6933 3
2000	1.6181 -3	6.6374 -4	5.8076 -1	3.4674 3
2100	3.1046 -3	1.3104 -3	6.4365 -1	1.6826 3
2200	5.6105 -3	2.6453 -3	7.0758 -1	8.7406 2
2300	9.6383 -3	4.9317 -3	7.7446 -1	4.8044 2
2400	1.5649 -2	8.6099 -3	8.3753 -1	2.7733 2
2500	2.5061 -2	1.4388 -2	8.9750 -1	1.6745 2
2600	3.8194 -2	2.3121 -2	9.6161 -1	1.0495 2
2700	5.6604 -2	3.5810 -2	1.0233 0	6.8077 1
2800	8.1470 -2	5.3951 -2	1.0314 0	4.5499 1
2900	1.1455 -1	7.8886 -2	1.1402 0	3.1261 1
3000	1.5740 -1	1.1246 -1	1.1967 0	2.2089 1
3100	2.1184 -1	1.5668 -1	1.2531 0	1.5885 1
3200	2.7990 -1	2.1380 -1	1.3062 0	1.1666 1
3300	3.6332 -1	2.8642 -1	1.3583 0	8.7498 0
3400	4.6559 -1	3.7757 -1	1.4125 0	6.6681 0
3500	5.8749 -1	4.8978 -1	1.4682 0	5.1583 0
3600	7.3282 -1	6.2517 -1	1.5101 0	4.0498 0
3700	9.0365 -1	7.8886 -1	1.5560 0	3.2137 0
3800	1.0990 0	9.8401 -1	1.6032 0	2.5882 0
3900	1.3274 0	1.2134 0	1.6444 0	2.1098 0
4000	1.5849 0	1.4791 0	1.6806 0	1.7298 0
4100	1.8793 0	1.7865 0	1.7298 0	1.4355 0
4200	2.2080 0	2.1380 0	1.7701 0	1.1995 0
4300	2.5823 0	2.5351 0	1.8072 0	1.0116 0
4400	2.9923 0	2.9854 0	1.8450 0	8.6099 -1
4500	3.4435 0	3.4914 0	1.8836 0	7.3621 -1
4600	3.9355 0	4.0551 0	1.9143 0	6.3533 -1
4700	4.4771 0	4.6881 0	1.9498 0	5.5081 -1
4800	5.0699 0	5.3703 0	1.9815 0	4.7973 -1
4900	5.7148 0	6.1376 0	2.0137 0	4.2073 -1
5000	6.3973 0	6.9663 0	2.0464 0	3.7154 -1
5100	7.1450 0	7.8524 0	2.0749 0	3.2885 -1
5200	7.9433 0	8.8308 0	2.1038 0	2.9442 -1
5300	8.7902 0	9.8855 0	2.1281 0	2.6122 -1
5400	9.6828 0	1.1015 1	2.1528 0	2.3442 -1
5500	1.0641 1	1.2246 1	2.1827 0	2.1135 -1
5600	1.1641 1	1.3552 1	2.2029 0	1.9077 -1
5700	1.2706 1	1.4928 1	2.2284 0	1.7256 -1
5800	1.3836 1	1.6406 1	2.2491 0	1.5740 -1
5900	1.5031 1	1.7947 1	2.2751 0	1.4508 -1
6000	1.6255 1	1.9544 1	2.2961 0	1.3483 -1

TABLE 5 EQUILIBRIUM CONSTANTS, $K_p^{(j)}$ atm ^(j)

T (K)	$K_p^{(j)} \text{ atm}^n$ $\frac{1}{2}N_2 = N$	$K_p^{(j)} \text{ atm}^n$ $\frac{1}{2}N_2 + \frac{1}{2}O_2 = NO$	$K_p^{(j)} \text{ atm}^{-1}$ $CO + \frac{1}{2}O_2 = CO_2$
1100	5.4325 -20	2.3281 -4	7.5858 8
1200	4.1976 -18	5.3080 -4	5.8076 7
1300	1.6678 -16	1.0666 -3	6.6222 6
1400	3.9824 -15	1.9409 -3	1.0328 6
1500	6.0674 -14	3.2584 -3	2.0701 5
1600	6.6834 -13	5.1286 -3	5.0816 4
1700	5.5463 -12	7.6560 -3	1.4791 4
1800	3.6559 -11	1.0914 -2	4.9317 3
1900	1.9724 -10	1.5031 -2	1.8493 3
2000	8.9950 -10	1.9999 -2	7.6540 2
2100	3.5563 -9	2.5942 -2	3.4594 2
2200	1.2445 -8	3.2810 -2	1.6827 2
2300	3.8994 -8	4.0644 -2	8.7056 1
2400	1.1117 -7	4.9545 -2	4.7753 1
2500	2.9174 -7	5.9293 -2	2.7542 1
2600	7.0958 -7	7.0246 -2	1.6558 1
2700	1.6218 -6	8.1846 -2	1.0351 1
2800	3.4914 -6	9.4406 -2	6.6834 0
2900	7.1285 -6	1.0789 -1	4.4566 0
3000	1.3868 -5	1.2218 -1	3.0549 0
3100	2.5882 -5	1.3709 -1	2.1478 0
3200	4.6559 -5	1.5311 -1	1.5453 0
3300	8.0724 -5	1.6943 -1	1.1324 0
3400	1.3552 -4	1.8664 -1	8.4918 -1
3500	2.2080 -4	2.0417 -1	6.4565 -1
3600	3.5075 -4	2.2233 -1	4.9088 -1
3700	5.4325 -4	2.4099 -1	3.9084 -1
3800	8.2035 -4	2.6002 -1	3.1046 -1
3900	1.2162 -3	2.7925 -1	2.4946 -1
4000	1.7701 -3	2.9923 -1	2.0324 -1
4100	2.5235 -3	3.1915 -1	1.6672 -1
4200	3.5481 -3	3.3884 -1	1.3868 -1
4300	4.8978 -3	3.5975 -1	1.1588 -1
4400	6.6681 -3	3.8019 -1	9.7949 -2
4500	8.9743 -3	4.0087	8.3368 -2
4600	1.1912 -2	4.2170 -1	7.1285 -2
4700	1.5596 -2	4.4259 -1	6.1518 -2
4800	2.0230 -2	4.6452 -1	5.3456 -2
4900	2.6002 -2	4.8729 -1	4.6774 -2
5000	3.3057 -2	5.0582 -1	4.1115 -2
5100	4.1591 -2	5.2723 -1	3.6308 -2
5200	5.2000 -2	5.4828 -1	3.2211 -2
5300	6.4417 -2	5.6885 -1	2.8774 -2
5400	7.9068 -2	5.9020 -1	2.5763 -2
5500	9.6383 -2	6.1094 -1	2.3174 -2
5600	1.1695 -1	6.3241 -1	2.0941 -2
5700	1.4060 -1	6.5313 -1	1.8967 -2
5800	1.6827 -1	6.7298 -1	1.7258 -2
5900	2.0045 -1	6.9343 -1	1.5776 -2
6000	2.3714 -1	7.1285 -1	1.4421 -2

TABLE 6 REDUCED ABSOLUTE FORMATION ENTHALPIES

$$\left[\frac{\Delta H_{f,abs}}{RT} \right]_i^T = \left[\frac{\Delta E_{o,f}}{RT} \right]_i^{T^{OK}} \cdot \frac{1}{T} + \left[\frac{H - E_o}{T} \right]_i^T$$

T (K)	H	O	OH	H ₂ O
100	252.3700	299.5070	50.3070	-283.1090
200	132.4100	151.1550	27.1010	-139.7470
300	89.6411	102.2756	19.3815	-92.3828
400	69.1067	101.6040	19.2157	-71.9247
500	67.4550	76.1095	15.3075	-67.6240
600	64.4640	62.0330	12.9970	-53.4850
700	65.8033	52.1170	11.4227	-43.8033
800	39.6171	45.0751	10.2496	-36.9124
900	34.9775	39.7273	9.4598	-31.4210
1000	31.3509	35.5293	8.8104	-27.6749
1100	28.4420	32.2820	8.2960	-24.1280
1200	26.1200	29.5754	7.8800	-21.7486
1300	24.1517	27.3205	7.5368	-19.4927
1400	22.4852	25.4116	7.2522	-17.4586
1500	21.0586	23.7756	7.0113	-15.6827
1600	19.8213	22.3580	6.8057	-14.1563
1700	18.7388	21.1171	6.6299	-13.2460
1800	17.7835	20.0228	6.4770	-12.1215
1900	16.9364	19.0497	6.3522	-11.1194
2000	16.1747	18.1707	6.2555	-10.2172
2100	15.4910	17.3945	6.1825	-9.4010
2200	14.8724	16.6857	6.0302	-8.6528
2300	14.3100	16.0412	5.9480	-7.9808
2400	13.7955	15.4525	5.8736	-7.3409
2500	13.3258	14.9128	5.8069	-6.7313
2600	12.8928	14.4170	5.7470	-6.1564
2700	12.4931	13.9593	5.6920	-5.7433
2800	12.1230	13.5354	5.6425	-5.3100
2900	11.7793	13.1418	5.5976	-4.8549
3000	11.4593	12.7752	5.5561	-4.4880
3100	11.1607	12.4330	5.5173	-4.1157
3200	10.8813	12.1128	5.4821	-3.7667
3300	10.6194	11.8135	5.4499	-3.4380
3400	10.3733	11.5325	5.4197	-3.1279
3500	10.1418	11.2669	5.3920	-2.8358
3600	9.9234	11.0174	5.3667	-2.5593
3700	9.7172	10.7818	5.3426	-2.2972
3800	9.5222	10.5560	5.3195	-2.0495
3900	9.3374	10.3408	5.2993	-1.8131
4000	9.1621	10.1485	5.2797	-1.5892
4100	8.9955	9.9993	5.2618	-1.3750
4200	8.8371	9.7702	5.2442	-1.1718
4300	8.6862	9.6069	5.2281	-0.9779
4400	8.5423	9.4434	5.2132	-0.7928
4500	8.4050	9.2876	5.1995	-0.6229
4600	8.2730	9.1387	5.1869	-0.4628
4700	8.1483	8.9953	5.1733	-0.3000
4800	8.0281	8.8610	5.1617	-0.1430
4900	7.9129	8.7304	5.1500	0.0073
5000	7.8024	8.6052	5.1401	0.1725
5100	7.6974	8.4850	5.1300	0.3168
5200	7.5985	8.3706	5.1207	0.4455
5300	7.4955	8.2607	5.1120	0.5738
5400	7.4023	8.1537	5.1031	0.6992
5500	7.3115	8.0492	5.0957	0.8175
5600	7.2240	7.9473	5.0880	0.9343
5700	7.1396	7.8477	5.0808	1.0466
5800	7.0574	7.7504	5.0741	1.1444
5900	6.9777	7.6551	5.0678	1.2375
6000	6.8995	7.5614	5.0624	1.3266
6100	6.8233	7.4695	5.0572	1.4117

($\frac{H - E_o}{T}$)

25.12

21.87

16.75

-2.776

TABLE 7 REDUCED ABSOLUTE FORMATION ENTHALPIES

$$\left[\frac{\Delta H_{f,abs}}{RT} \right]_i^T = \left[\frac{\Delta E_{of}}{RT} \right]_i^{T_{OK}} \cdot \frac{1}{T} + \left[\frac{H - E_0}{T} \right]_i^T$$

T (K)	NO	N	CO	CO ₂
100	111.7440	561.6300	-137.4930	-469.3670
200	57.7490	289.6150	-64.0410	-235.1820
298.15	39.9089	199.3746	-42.4090	-154.8237
300	38.7037	191.2100	-42.1297	-151.8970
400	30.6765	144.0325	-30.7190	-114.1980
500	25.2670	115.7260	-23.4440	-90.3000
600	21.6743	96.8590	-19.2833	-71.3440
700	19.1211	83.3757	-15.9793	-60.8904
800	17.2178	73.2663	-13.5250	-54.2695
900	15.7469	65.4033	-11.5919	-47.9410
1000	14.5780	59.1130	-10.0370	-42.1120
1100	13.6273	53.9564	-8.7586	-37.1203
1200	12.8392	49.6775	-7.6887	-32.8620
1300	12.1759	46.0485	-6.7792	-29.0668
1400	11.6106	42.9379	-5.9951	-25.6637
1500	11.1223	40.2420	-5.3153	-22.6250
1600	10.6974	37.8831	-4.7170	-20.0000
1700	10.3233	35.8018	-4.1878	-17.7433
1800	9.9924	33.9517	-3.7164	-15.8310
1900	9.6967	32.2963	-3.2922	-14.2204
2000	9.4315	30.8065	-2.9110	-12.8700
2100	9.1934	29.4586	-2.5641	-11.6571
2200	8.9767	28.2332	-2.2478	-10.5595
2300	8.7792	27.1143	-1.9593	-9.5541
2400	8.5986	26.0888	-1.6933	-8.6295
2500	8.4336	25.1452	-1.4492	-7.7724
2600	8.2815	24.2752	-1.2226	-6.9739
2700	8.1406	23.4688	-1.0226	-6.2293
2800	8.0098	22.7199	-0.8476	-5.5429
2900	7.8888	22.0237	-0.6950	-4.9135
3000	7.7757	21.3730	-0.4647	-4.3320
3100	7.6705	20.7653	-0.3055	-3.7975
3200	7.5717	20.1956	-0.1955	-3.3099
3300	7.4794	19.6605	-0.1149	-2.8681
3400	7.3922	19.1509	0.1181	-2.4616
3500	7.3114	18.6631	0.2431	-2.0813
3600	7.2337	18.2348	0.3618	-1.7260
3700	7.1616	17.8118	0.4745	-1.3920
3800	7.0928	17.4112	0.5809	-1.0727
3900	7.0270	17.0312	0.6823	-0.7706
4000	6.9658	16.6713	0.7780	-0.4825
4100	6.9069	16.3280	0.8705	-0.2072
4200	6.8512	16.0023	0.9590	-0.0425
4300	6.7984	15.6928	1.0407	0.1177
4400	6.7473	15.3966	1.1141	0.2928
4500	6.6988	15.1147	1.1792	0.4750
4600	6.6526	14.8452	1.2373	0.6625
4700	6.6087	14.5883	1.2897	0.8549
4800	6.5668	14.3414	1.4083	1.0533
4900	6.5269	14.1057	1.4725	1.2572
5000	6.4878	13.8796	1.5344	1.4672
5100	6.4505	13.6636	1.5941	1.6838
5200	6.4157	13.4571	1.6517	1.9075
5300	6.3725	13.2597	1.7074	2.1379
5400	6.3478	13.0649	1.7602	2.3747
5500	6.3165	12.8803	1.8123	2.6184
5600	6.2864	12.7035	1.8617	2.8699
5700	6.2576	12.5321	1.9095	3.1291
5800	6.2289	12.3679	1.9570	3.3954
5900	6.2013	12.2104	1.9920	3.6697
6000	6.1748	12.0595	2.0457	3.9520

($\frac{\Delta H_{f,abs}}{RT}$) 10799 76613 -13668 -47206

TABLE 8 REDUCED SENSIBLE ENTHALPIES,

$$\left[\frac{H - E_0}{RT} \right]_i T$$

T (K)	H ₂	H	O ₂	O	OH	H ₂ O
100	3.480	2.500	3.495	2.657	3.641	3.955
200	3.487	2.500	3.497	2.730	3.721	3.933
298.15	3.418	2.500	3.424	2.715	3.701	3.997
300	3.417	2.500	3.502	2.714	3.699	3.996
400	3.436	2.500	3.521	2.687	3.670	4.016
500	3.452	2.500	3.553	2.653	3.647	4.047
600	3.454	2.500	3.574	2.644	3.631	4.090
700	3.474	2.500	3.640	2.628	3.621	4.139
800	3.484	2.500	3.687	2.610	3.616	4.199
900	3.495	2.500	3.732	2.606	3.616	4.253
1000	3.507	2.500	3.775	2.597	3.621	4.316
1100	3.520	2.500	3.816	2.589	3.630	4.381
1200	3.534	2.500	3.853	2.583	3.641	4.448
1300	3.550	2.500	3.884	2.577	3.656	4.510
1400	3.568	2.500	3.912	2.572	3.672	4.583
1500	3.587	2.500	3.938	2.568	3.689	4.651
1600	3.608	2.500	3.961	2.564	3.708	4.717
1700	3.628	2.500	4.008	2.561	3.727	4.788
1800	3.650	2.500	4.034	2.558	3.746	4.845
1900	3.671	2.500	4.056	2.555	3.765	4.907
2000	3.692	2.500	4.082	2.552	3.785	4.967
2100	3.714	2.500	4.105	2.550	3.804	5.025
2200	3.736	2.500	4.127	2.548	3.823	5.081
2300	3.757	2.500	4.148	2.546	3.841	5.135
2400	3.778	2.500	4.168	2.544	3.859	5.187
2500	3.799	2.500	4.188	2.543	3.877	5.238
2600	3.819	2.500	4.208	2.542	3.894	5.286
2700	3.839	2.500	4.227	2.541	3.911	5.333
2800	3.859	2.500	4.245	2.540	3.928	5.378
2900	3.878	2.500	4.263	2.539	3.944	5.421
3000	3.897	2.500	4.281	2.538	3.959	5.463
3100	3.916	2.500	4.298	2.537	3.974	5.503
3200	3.934	2.500	4.315	2.537	3.989	5.542
3300	3.952	2.500	4.332	2.537	4.003	5.580
3400	3.969	2.500	4.348	2.536	4.017	5.616
3500	3.987	2.500	4.364	2.536	4.031	5.651
3600	4.003	2.500	4.379	2.536	4.044	5.685
3700	4.020	2.500	4.395	2.537	4.056	5.717
3800	4.037	2.500	4.409	2.537	4.069	5.749
3900	4.053	2.500	4.424	2.537	4.081	5.779
4000	4.069	2.500	4.438	2.538	4.093	5.809
4100	4.084	2.500	4.452	2.539	4.104	5.837
4200	4.100	2.500	4.465	2.539	4.115	5.865
4300	4.115	2.500	4.479	2.540	4.126	5.892
4400	4.130	2.500	4.491	2.541	4.137	5.918
4500	4.145	2.500	4.504	2.542	4.147	5.943
4600	4.160	2.500	4.516	2.543	4.157	5.967
4700	4.174	2.500	4.528	2.545	4.167	5.991
4800	4.188	2.500	4.540	2.546	4.176	6.014
4900	4.202	2.500	4.551	2.547	4.185	6.037
5000	4.216	2.500	4.562	2.549	4.195	6.058
5100	4.230	2.500	4.573	2.550	4.204	6.080
5200	4.243	2.500	4.584	2.552	4.213	6.100
5300	4.257	2.500	4.594	2.553	4.221	6.120
5400	4.270	2.500	4.604	2.555	4.230	6.140
5500	4.283	2.500	4.614	2.557	4.238	6.159
5600	4.296	2.500	4.624	2.558	4.246	6.178
5700	4.309	2.500	4.633	2.560	4.254	6.196
5800	4.321	2.500	4.642	2.562	4.262	6.214
5900	4.334	2.500	4.651	2.564	4.270	6.231
6000	4.346	2.500	4.659	2.566	4.277	6.248

$$\left(\frac{H - E_0}{RT} \right)_1^T - \left(\frac{H - E_0}{RT} \right)_1^{T_1} + \frac{T - T_1}{100} \left[\left(\frac{H - E_0}{RT} \right)_1^{T_2} - \left(\frac{H - E_0}{RT} \right)_1^{T_1} \right]$$

$$T_1 < T < T_2 + 100; T_2$$

TABLE 9 REDUCED SENSIBLE ENTHALPIES,

$$\left[\frac{H - E_0}{RT} \right]_i^T$$

T (K)	N ₂	NO	N	CO	CO ₂
100	3.487	3.754	2.501	3.487	3.497
200	3.495	3.754	2.499	3.495	3.511
298.16	3.499	3.750	2.501	3.499	3.779
300	3.497	3.707	2.499	3.497	3.781
400	3.500	3.679	2.500	3.501	4.021
500	3.508	3.669	2.500	3.512	4.252
600	3.520	3.676	2.500	3.530	4.466
700	3.541	3.694	2.500	3.555	4.662
800	3.565	3.719	2.500	3.585	4.838
900	3.594	3.748	2.500	3.617	4.999
1000	3.624	3.779	2.500	3.651	5.144
1100	3.655	3.810	2.500	3.685	5.277
1200	3.686	3.840	2.500	3.718	5.397
1300	3.717	3.869	2.500	3.750	5.507
1400	3.746	3.897	2.500	3.781	5.607
1500	3.775	3.923	2.500	3.810	5.699
1600	3.802	3.948	2.500	3.838	5.784
1700	3.828	3.971	2.500	3.864	5.862
1800	3.852	3.993	2.500	3.888	5.934
1900	3.875	4.013	2.500	3.912	6.001
2000	3.898	4.032	2.500	3.933	6.063
2100	3.918	4.051	2.500	3.954	6.120
2200	3.938	4.068	2.500	3.974	6.174
2300	3.957	4.084	2.500	3.992	6.225
2400	3.975	4.099	2.500	4.010	6.272
2500	3.992	4.114	2.500	4.026	6.316
2600	4.008	4.128	2.501	4.042	6.358
2700	4.024	4.141	2.501	4.057	6.398
2800	4.038	4.153	2.501	4.071	6.435
2900	4.052	4.165	2.502	4.085	6.470
3000	4.066	4.176	2.502	4.098	6.504
3100	4.078	4.187	2.503	4.110	6.536
3200	4.090	4.197	2.504	4.122	6.566
3300	4.102	4.207	2.505	4.133	6.595
3400	4.113	4.216	2.506	4.144	6.623
3500	4.124	4.226	2.508	4.154	6.649
3600	4.134	4.234	2.509	4.164	6.674
3700	4.144	4.243	2.511	4.174	6.698
3800	4.154	4.251	2.513	4.183	6.722
3900	4.163	4.258	2.515	4.192	6.744
4000	4.172	4.266	2.518	4.200	6.765
4100	4.180	4.273	2.520	4.209	6.786
4200	4.189	4.280	2.523	4.217	6.806
4300	4.197	4.287	2.527	4.224	6.825
4400	4.204	4.293	2.530	4.232	6.844
4500	4.212	4.299	2.534	4.239	6.862
4600	4.219	4.305	2.538	4.246	6.879
4700	4.226	4.311	2.543	4.253	6.896
4800	4.233	4.317	2.547	4.260	6.912
4900	4.240	4.323	2.552	4.266	6.928
5000	4.246	4.328	2.557	4.272	6.944
5100	4.253	4.333	2.563	4.278	6.959
5200	4.259	4.339	2.568	4.284	6.973
5300	4.265	4.345	2.574	4.290	6.986
5400	4.271	4.348	2.581	4.295	7.000
5500	4.276	4.353	2.587	4.301	7.015
5600	4.282	4.358	2.594	4.306	7.028
5700	4.288	4.362	2.600	4.311	7.042
5800	4.293	4.367	2.607	4.317	7.054
5900	4.298	4.371	2.614	4.322	7.067
6000	4.303	4.375	2.622	4.327	7.079

$$\left(\frac{H - E_0}{RT} \right)_1^T - \left(\frac{H - E_0}{RT} \right)_1^{T_1} + \frac{T - T_1}{100} \left[\left(\frac{H - E_0}{RT} \right)_1^{T_2} - \left(\frac{H - E_0}{RT} \right)_1^{T_1} \right]$$

$$T_1 < T < T_2 = 100 + T_1$$

TABLE 10 REDUCED ENTROPIES

$$\left[\frac{S^{p=1}}{R} \right]_i^T$$

T (K)	N ₂	O ₂	CO ₂	H ₂ O	CH ₄	H ₂
100	12.272	11.053	20.096	16.337	18.041	18.315
200	14.351	12.705	23.205	18.286	20.072	21.042
281.16	15.704	13.704	24.559	19.357	21.100	22.041
300	15.720	13.799	24.621	19.374	22.122	22.757
400	16.730	14.518	25.709	20.124	23.140	23.804
500	17.515	15.077	26.530	20.697	23.644	24.625
600	18.157	15.527	27.222	21.102	24.090	25.069
700	18.702	15.917	27.826	21.553	24.483	26.242
800	19.174	16.282	28.352	21.960	24.810	26.503
900	19.598	16.626	28.804	22.327	25.082	27.440
1000	19.978	16.959	29.283	22.653	25.320	27.974
1100	20.326	17.283	29.785	22.942	25.528	28.454
1200	20.643	17.605	30.206	23.210	25.710	28.905
1300	20.947	17.915	30.601	23.451	25.866	29.331
1400	21.229	18.210	30.973	23.677	25.997	29.735
1500	21.495	18.493	31.324	23.871	26.105	30.121
1600	21.747	18.764	31.650	24.032	26.190	30.490
1700	21.988	19.024	31.950	24.164	26.255	30.843
1800	22.217	19.274	32.224	24.277	26.300	31.181
1900	22.436	19.514	32.479	24.363	26.332	31.507
2000	22.646	19.742	32.711	24.421	26.355	31.820
2100	22.849	19.964	32.923	24.453	26.369	32.122
2200	23.043	20.181	33.117	24.460	26.375	32.412
2300	23.231	20.391	33.291	24.441	26.373	32.694
2400	23.413	20.598	33.449	24.408	26.364	32.955
2500	23.588	20.800	33.589	24.360	26.348	33.229
2600	23.758	20.998	33.724	24.299	26.325	33.484
2700	23.922	21.192	33.842	24.224	26.295	33.731
2800	24.082	21.383	33.944	24.135	26.258	33.970
2900	24.237	21.571	34.032	24.032	26.213	34.203
3000	24.388	21.756	34.204	23.909	26.160	34.430
3100	24.534	21.938	34.362	23.771	26.103	34.650
3200	24.677	22.117	34.516	23.617	26.041	34.864
3300	24.817	22.294	34.665	23.449	25.974	35.072
3400	24.952	22.469	34.811	23.267	25.902	35.276
3500	25.085	22.641	34.953	23.070	25.825	35.474
3600	25.214	22.811	35.092	22.850	25.741	35.668
3700	25.341	22.978	35.227	22.607	25.650	35.856
3800	25.465	23.147	35.360	22.342	25.553	36.041
3900	25.586	23.312	35.489	22.057	25.450	36.221
4000	25.705	23.475	35.615	21.750	25.342	36.397
4100	25.821	23.637	35.739	21.422	25.229	36.569
4200	25.935	23.797	35.859	21.074	25.111	36.738
4300	26.047	23.956	35.978	20.707	24.988	36.903
4400	26.157	24.113	36.094	20.321	24.860	37.065
4500	26.264	24.267	36.208	19.916	24.727	37.224
4600	26.370	24.424	36.319	19.491	24.589	37.379
4700	26.475	24.578	36.429	19.047	24.446	37.531
4800	26.577	24.731	36.536	18.584	24.298	37.681
4900	26.677	24.882	36.640	18.103	24.145	37.827
5000	26.776	25.033	36.744	17.604	23.987	37.971
5100	26.874	25.183	36.845	17.087	23.825	38.113
5200	26.969	25.331	36.944	16.552	23.657	38.252
5300	27.064	25.479	37.042	16.000	23.484	38.388
5400	27.156	25.625	37.138	15.431	23.306	38.522
5500	27.248	25.771	37.233	14.845	23.124	38.654
5600	27.339	25.916	37.325	14.242	22.937	38.784
5700	27.427	26.060	37.416	13.623	22.745	38.911
5800	27.515	26.204	37.507	12.987	22.548	39.037
5900	27.601	26.347	37.596	12.334	22.346	39.161
6000	27.686	26.489	37.682	11.665	22.139	39.283

TABLE 11 REDUCED ENTROPIES,

$$\left[\frac{s^{p=1}}{R} \right]_i^T$$

T (K)	N ₂	NO	N	CO	CO ₂
100	19.179	21.879	15.693	19.885	21.777
200	21.631	23.891	17.427	22.355	24.057
298.16	23.032	25.315	18.424	23.758	25.700
300	23.053	25.353	18.440	23.780	25.727
400	24.062	26.330	19.159	24.790	27.088
500	24.851	27.200	19.717	25.402	28.241
600	25.505	27.876	20.173	26.243	29.249
700	26.069	28.462	20.558	26.814	30.147
800	26.568	28.963	20.892	27.321	30.958
900	27.018	29.452	21.186	27.777	31.698
1000	27.428	29.879	21.450	28.194	32.378
1100	27.806	30.271	21.688	28.577	33.007
1200	28.157	30.634	21.906	28.932	33.592
1300	28.483	30.971	22.106	29.263	34.136
1400	28.789	31.287	22.291	29.573	34.650
1500	29.077	31.583	22.464	29.864	35.132
1600	29.349	31.861	22.625	30.138	35.588
1700	29.606	32.125	22.777	30.398	36.018
1800	29.850	32.374	22.919	30.644	36.428
1900	30.083	32.611	23.054	30.878	36.817
2000	30.304	32.837	23.183	31.102	37.188
2100	30.515	32.851	23.305	31.314	37.543
2200	30.718	33.258	23.421	31.518	37.883
2300	30.912	33.455	23.532	31.714	38.209
2400	31.099	33.645	23.639	31.902	38.522
2500	31.279	33.827	23.741	32.082	38.824
2600	31.452	34.002	23.839	32.256	39.114
2700	31.619	34.172	23.934	32.424	39.394
2800	31.780	34.335	24.026	32.586	39.663
2900	31.936	34.492	24.114	32.743	39.922
3000	32.087	34.645	24.199	32.895	40.180
3100	32.233	34.793	24.282	33.041	40.426
3200	32.375	34.936	24.362	33.184	40.664
3300	32.513	35.075	24.440	33.322	40.896
3400	32.646	35.211	24.516	33.457	41.120
3500	32.776	35.342	24.590	33.587	41.339
3600	32.903	35.470	24.663	33.714	41.552
3700	33.026	35.594	24.733	33.838	41.759
3800	33.147	35.716	24.802	33.959	41.961
3900	33.264	35.834	24.869	34.076	42.159
4000	33.378	35.949	24.936	34.191	42.351
4100	33.490	36.062	25.001	34.303	42.539
4200	33.599	36.171	25.065	34.413	42.723
4300	33.706	36.279	25.127	34.519	42.902
4400	33.810	36.384	25.189	34.624	43.078
4500	33.912	36.487	25.250	34.727	43.250
4600	34.012	36.588	25.310	34.827	43.419
4700	34.110	36.686	25.369	34.925	43.583
4800	34.206	36.783	25.427	35.021	43.745
4900	34.299	36.877	25.484	35.116	43.904
5000	34.392	36.971	25.541	35.208	44.059
5100	34.482	37.062	25.597	35.299	44.212
5200	34.571	37.151	25.652	35.388	44.362
5300	34.658	37.238	25.707	35.475	44.509
5400	34.744	37.324	25.762	35.561	44.653
5500	34.828	37.409	25.815	35.645	44.796
5600	34.911	37.492	25.869	35.728	44.936
5700	34.992	37.574	25.922	35.810	45.073
5800	35.072	37.654	25.974	35.890	45.208
5900	35.151	37.733	26.026	35.969	45.342
6000	35.228	37.811	26.077	36.046	45.473

TABLE 12 REDUCED SPECIFIC HEATS,

$$\left[\frac{C_p}{R} \right]_i^T$$

T (K)	R_0	M	Q_0	σ	OH
100	2.714	2.500	3.501	2.651	3.904
200	3.280	2.500	3.503	2.735	3.710
298.16	3.468	2.500	3.533	2.835	3.407
300	3.469	2.500	3.534	2.834	3.406
400	3.510	2.500	3.621	2.904	3.246
500	3.519	2.500	3.739	2.957	3.550
600	3.527	2.500	3.860	2.941	3.551
700	3.541	2.500	3.937	2.931	3.542
800	3.546	2.500	4.058	2.924	3.528
900	3.597	2.500	4.133	2.919	3.640
1000	3.633	2.500	4.195	2.916	3.690
1100	3.674	2.500	4.247	2.913	3.744
1200	3.719	2.500	4.291	2.911	3.799
1300	3.769	2.500	4.330	2.910	3.854
1400	3.823	2.500	4.365	2.908	3.908
1500	3.883	(2500)	4.397	2.907	3.959
1600	3.937	2.500	4.428	2.907	4.007
1700	3.986	2.500	4.458	2.906	4.053
1800	4.034	2.500	4.487	2.906	4.095
1900	4.080	2.500	4.515	2.905	4.134
2000	4.124	2.500	4.544	2.905	4.170
2100	4.166	2.500	4.571	2.905	4.203
2200	4.206	2.500	4.599	2.906	4.235
2300	4.244	2.500	4.627	2.906	4.263
2400	4.280	2.500	4.654	2.907	4.291
2500	4.315	2.500	4.681	2.908	4.319
2600	4.347	2.500	4.707	2.909	4.339
2700	4.378	2.500	4.733	2.911	4.360
2800	4.407	2.500	4.758	2.913	4.381
2900	4.433	2.500	4.782	2.916	4.400
3000	4.458	2.500	4.806	2.918	4.418
3100	4.484	2.500	4.829	2.921	4.435
3200	4.510	2.500	4.851	2.925	4.452
3300	4.535	2.500	4.872	2.929	4.467
3400	4.560	2.500	4.893	2.933	4.481
3500	4.584	2.500	4.913	2.937	4.495
3600	4.609	2.500	4.931	2.941	4.508
3700	4.632	2.500	4.949	2.946	4.521
3800	4.656	2.500	4.966	2.951	4.533
3900	4.679	2.500	4.982	2.957	4.545
4000	4.701	2.500	4.998	2.962	4.556
4100	4.723	2.500	5.013	2.968	4.566
4200	4.745	2.500	5.026	2.974	4.577
4300	4.767	2.500	5.040	2.980	4.587
4400	4.788	2.500	5.052	2.986	4.596
4500	4.808	2.500	5.063	2.992	4.606
4600	4.828	2.500	5.075	2.998	4.615
4700	4.848	2.500	5.085	2.604	4.624
4800	4.868	2.500	5.094	2.610	4.633
4900	4.887	2.500	5.103	2.616	4.641
5000	4.905	2.500	5.111	2.622	4.649
5100	4.924	2.500	5.119	2.628	4.657
5200	4.943	2.500	5.126	2.634	4.665
5300	4.961	2.500	5.133	2.640	4.673
5400	4.979	2.500	5.139	2.646	4.681
5500	4.997	2.500	5.146	2.652	4.689
5600	5.015	2.500	5.152	2.657	4.695
5700	5.032	2.500	5.157	2.663	4.702
5800	5.049	2.500	5.162	2.668	4.709
5900	5.066	2.500	5.167	2.674	4.716
6000	5.083	2.500	5.171	2.679	4.723

$$\left(\frac{C_p}{R} \right)_i^T - \left(\frac{C_p}{R} \right)_i^{T_0} = \frac{1}{100} \ln \left[\left(\frac{C_p}{R} \right)_i^{T_2} - \left(\frac{C_p}{R} \right)_i^{T_1} \right]$$

TABLE 13 REDUCED SPECIFIC HEATS,

$$\left[\frac{C_p}{R} \right]_T^i$$

T (K)	H ₂	N ₂	Ar	CO ₂	CO	H ₂ O
100	3.500	2.500	3.865	3.813	3.500	4.006
200	3.501	2.500	3.659	3.692	3.401	4.010
298.16	3.503	2.500	3.590	4.466	3.505	4.038
300	3.503	2.500	3.589	4.477	3.505	4.039
400	3.518	2.500	3.402	4.970	3.529	4.119
500	3.557	2.500	3.667	5.367	3.583	4.235
600	3.621	2.500	3.757	5.692	3.651	4.365
700	3.699	2.500	3.852	5.961	3.729	4.500
800	3.780	2.500	3.941	6.186	3.837	4.653
900	3.860	2.500	4.020	6.374	3.918	4.804
1000	3.933	2.500	4.088	6.532	3.991	4.957
1100	3.998	2.500	4.146	6.664	4.055	5.109
1200	4.057	2.500	4.195	6.776	4.110	5.255
1300	4.107	2.500	4.237	6.872	4.158	5.411
1400	4.153	2.500	4.273	6.952	4.200	5.589
1500	4.192	2.500	4.304	7.022	4.231	5.653
1600	4.226	2.500	4.330	7.082	4.257	5.768
1700	4.256	2.500	4.353	7.134	4.285	5.875
1800	4.283	2.500	4.374	7.181	4.319	5.973
1900	4.307	2.501	4.392	7.222	4.341	6.063
2000	4.328	2.501	4.408	7.259	4.360	6.145
2100	4.347	2.501	4.422	7.291	4.377	6.220
2200	4.364	2.502	4.435	7.320	4.392	6.293
2300	4.380	2.502	4.447	7.347	4.406	6.358
2400	4.394	2.504	4.458	7.371	4.419	6.418
2500	4.406	2.505	4.467	7.393	4.430	6.473
2600	4.418	2.507	4.476	7.415	4.441	6.524
2700	4.428	2.510	4.485	7.433	4.451	6.572
2800	4.438	2.513	4.492	7.451	4.460	6.615
2900	4.448	2.517	4.499	7.468	4.468	6.657
3000	4.456	2.522	4.506	7.485	4.476	6.699
3100	4.464	2.527	4.513	7.499	4.484	6.730
3200	4.472	2.534	4.519	7.513	4.491	6.764
3300	4.479	2.541	4.525	7.526	4.497	6.795
3400	4.486	2.550	4.530	7.539	4.503	6.825
3500	4.492	2.559	4.535	7.551	4.509	6.852
3600	4.498	2.570	4.540	7.564	4.515	6.879
3700	4.504	2.582	4.545	7.575	4.521	6.903
3800	4.510	2.595	4.550	7.586	4.526	6.926
3900	4.515	2.608	4.554	7.597	4.531	6.949
4000	4.521	2.623	4.558	7.608	4.536	6.970
4100	4.526	2.639	4.562	7.618	4.541	6.990
4200	4.530	2.656	4.566	7.628	4.546	7.008
4300	4.535	2.674	4.570	7.639	4.550	7.027
4400	4.540	2.693	4.574	7.648	4.555	7.044
4500	4.544	2.712	4.578	7.657	4.559	7.060
4600	4.549	2.733	4.582	7.666	4.563	7.076
4700	4.553	2.754	4.585	7.676	4.567	7.091
4800	4.558	2.776	4.589	7.685	4.571	7.105
4900	4.562	2.799	4.592	7.694	4.575	7.120
5000	4.566	2.822	4.595	7.702	4.579	7.133
5100	4.571	2.846	4.599	7.713	4.583	7.146
5200	4.575	2.870	4.602	7.724	4.587	7.160
5300	4.579	2.894	4.606	7.735	4.591	7.173
5400	4.584	2.919	4.609	7.746	4.594	7.187
5500	4.588	2.944	4.612	7.757	4.599	7.198
5600	4.593	2.969	4.615	7.768	4.602	7.210
5700	4.598	2.994	4.618	7.779	4.606	7.222
5800	4.602	3.019	4.621	7.790	4.610	7.234
5900	4.607	3.045	4.624	7.802	4.613	7.245
6000	4.612	3.070	4.627	7.813	4.617	7.258

$$\left(\frac{C_p}{R} \right)_T^i = \left(\frac{C_p}{R} \right)_{T_1}^i + \frac{T - T_1}{T_1} \left[\left(\frac{C_p}{R} \right)_{T_2}^i - \left(\frac{C_p}{R} \right)_{T_1}^i \right]$$

$$T_1 < T < T_2 + 100 = T_2$$

TABLE 14 REDUCED ENTROPY DIVIDED BY ln T,

$$\left[\frac{S^{p=1}}{R} \right]_i^T$$

T (K)	H ₂	H	O	C	OH	H ₂ O
100	2.1648	2.4001	4.5371	3.5475	3.9170	3.9771
200	2.7046	2.4130	4.3910	3.4513	3.8440	3.9809
298.16	2.7442	2.4193	4.3779	3.3974	3.8173	3.9838
300	2.7571	2.4193	4.3271	3.3937	3.8785	3.9838
400	2.7923	2.4231	4.2909	3.3588	3.8438	3.9870
500	2.8184	2.4261	4.2690	3.3304	3.8229	3.9946
600	2.8394	2.4280	4.2555	3.3081	3.8040	4.0033
700	2.8548	2.4297	4.2475	3.2900	3.6572	4.0134
800	2.8687	2.4313	4.2427	3.2747	3.8721	4.0246
900	2.8810	2.4324	4.2403	3.2616	3.8234	4.0368
1000	2.8921	2.4334	4.2391	3.2504	3.8228	4.0497
1100	2.9024	2.4344	4.2389	3.2403	3.8243	4.0631
1200	2.9122	2.4351	4.2392	3.2313	3.8237	4.0772
1300	2.9214	2.4358	4.2400	3.2232	3.8234	4.0907
1400	2.9305	2.4364	4.2410	3.2160	3.8243	4.1044
1500	2.9392	2.4371	4.2425	3.2094	3.8253	4.1187
1600	2.9476	2.4376	4.2438	3.2031	3.8266	4.1327
1700	2.9560	2.4382	4.2455	3.1975	3.8283	4.1465
1800	2.9640	2.4386	4.2472	3.1922	3.8301	4.1599
1900	2.9718	2.4391	4.2491	3.1873	3.8323	4.1733
2000	2.9794	2.4394	4.2509	3.1826	3.8344	4.1863
2100	2.9870	2.4398	4.2529	3.1783	3.8366	4.1991
2200	2.9941	2.4403	4.2550	3.1741	3.8389	4.2114
2300	3.0012	2.4405	4.2569	3.1704	3.8413	4.2237
2400	3.0081	2.4409	4.2590	3.1668	3.8437	4.2354
2500	3.0148	2.4412	4.2611	3.1633	3.8461	4.2470
2600	3.0214	2.4415	4.2634	3.1601	3.8484	4.2583
2700	3.0277	2.4417	4.2655	3.1569	3.8508	4.2692
2800	3.0340	2.4420	4.2677	3.1541	3.8532	4.2796
2900	3.0401	2.4423	4.2699	3.1512	3.8555	4.2901
3000	3.0461	2.4426	4.2721	3.1486	3.8579	4.3003
3100	3.0518	2.4428	4.2743	3.1460	3.8602	4.3102
3200	3.0575	2.4430	4.2766	3.1435	3.8625	4.3197
3300	3.0632	2.4432	4.2787	3.1412	3.8648	4.3290
3400	3.0685	2.4435	4.2810	3.1390	3.8669	4.3381
3500	3.0739	2.4436	4.2832	3.1368	3.8692	4.3470
3600	3.0791	2.4437	4.2854	3.1348	3.8713	4.3558
3700	3.0843	2.4440	4.2876	3.1328	3.8735	4.3643
3800	3.0894	2.4442	4.2898	3.1309	3.8755	4.3724
3900	3.0943	2.4444	4.2920	3.1290	3.8776	4.3805
4000	3.0992	2.4445	4.2940	3.1273	3.8796	4.3883
4100	3.1040	2.4447	4.2962	3.1257	3.8817	4.3960
4200	3.1087	2.4449	4.2982	3.1241	3.8837	4.4035
4300	3.1133	2.4450	4.3003	3.1225	3.8857	4.4109
4400	3.1179	2.4451	4.3024	3.1210	3.8875	4.4181
4500	3.1223	2.4454	4.3044	3.1197	3.8894	4.4252
4600	3.1267	2.4454	4.3064	3.1183	3.8914	4.4320
4700	3.1312	2.4456	4.3084	3.1169	3.8932	4.4387
4800	3.1354	2.4457	4.3103	3.1156	3.8949	4.4454
4900	3.1396	2.4458	4.3121	3.1144	3.8968	4.4518
5000	3.1438	2.4460	4.3141	3.1132	3.8986	4.4582
5100	3.1480	2.4462	4.3159	3.1121	3.9003	4.4645
5200	3.1519	2.4462	4.3177	3.1110	3.9020	4.4706
5300	3.1560	2.4464	4.3195	3.1099	3.9037	4.4763
5400	3.1598	2.4464	4.3213	3.1070	3.9053	4.4823
5500	3.1636	2.4466	4.3231	3.1060	3.9070	4.4881
5600	3.1676	2.4467	4.3248	3.1070	3.9084	4.4938
5700	3.1714	2.4467	4.3264	3.1028	3.9118	4.4993
5800	3.1752	2.4469	4.3281	3.1013	3.9118	4.5044
5900	3.1789	2.4470	4.3298	3.1043	3.9113	4.5102
6000	3.1825	2.4471	4.3315	3.1035	3.9141	4.5155

$$\left(\frac{S^{p=1}}{R} \right)_i^T = \left[\left(\frac{S^{p=1}}{R} \right)_i^{T_1} \cdot \frac{T_1 - T_2}{100} \left(\frac{S^{p=1}}{R} \right)_i^{T_2} - \left(\frac{S^{p=1}}{R} \right)_i^{T_1} \right]$$

$$T_1 < T < T_2 + 100 = T_2$$

TABLE 15 REDUCED ENTROPY DIVIDED BY ln T,

$$\left[\frac{S^{p=1}}{R} \right]_{T_i}^T$$

T (K)	H ₂	H ₂ O	N	CO	CO ₂
100	4.1647	4.1207	3.4077	4.3180	4.7783
200	4.0826	4.5058	3.2492	4.2193	4.5407
298.16	4.0424	4.4466	3.2334	4.1798	4.5104
300	4.0417	4.4458	3.2329	4.1692	4.5105
400	4.0160	4.4046	3.1977	4.1376	4.5211
500	3.9988	4.3768	3.1727	4.1160	4.5443
600	3.9871	4.3577	3.1535	4.1024	4.5723
700	3.9793	4.3446	3.1381	4.0931	4.6015
800	3.9745	4.3358	3.1254	4.0871	4.6312
900	3.9718	4.3297	3.1145	4.0834	4.6598
1000	3.9706	4.3254	3.1052	4.0815	4.6872
1100	3.9705	4.3225	3.0969	4.0806	4.7132
1200	3.9713	4.3207	3.0897	4.0806	4.7379
1300	3.9725	4.3195	3.0831	4.0812	4.7611
1400	3.9741	4.3189	3.0771	4.0823	4.7831
1500	3.9760	4.3186	3.0717	4.0836	4.8039
1600	3.9780	4.3185	3.0666	4.0850	4.8237
1700	3.9802	4.3188	3.0621	4.0866	4.8422
1800	3.9824	4.3191	3.0577	4.0883	4.8600
1900	3.9847	4.3196	3.0537	4.0900	4.8767
2000	3.9869	4.3201	3.0500	4.0919	4.8926
2100	3.9890	4.3207	3.0465	4.0935	4.9078
2200	3.9913	4.3213	3.0432	4.0953	4.9223
2300	3.9935	4.3220	3.0400	4.0971	4.9361
2400	3.9956	4.3228	3.0372	4.0988	4.9494
2500	3.9978	4.3235	3.0344	4.1004	4.9621
2600	3.9997	4.3242	3.0317	4.1021	4.9743
2700	4.0019	4.3250	3.0292	4.1038	4.9859
2800	4.0038	4.3257	3.0269	4.1054	4.9971
2900	4.0058	4.3263	3.0247	4.1070	5.0080
3000	4.0077	4.3272	3.0225	4.1086	5.0185
3100	4.0095	4.3279	3.0205	4.1100	5.0286
3200	4.0113	4.3286	3.0185	4.1116	5.0383
3300	4.0131	4.3294	3.0167	4.1130	5.0478
3400	4.0147	4.3302	3.0149	4.1145	5.0569
3500	4.0164	4.3309	3.0133	4.1158	5.0657
3600	4.0181	4.3316	3.0118	4.1171	5.0743
3700	4.0197	4.3322	3.0103	4.1185	5.0826
3800	4.0213	4.3330	3.0089	4.1199	5.0907
3900	4.0229	4.3337	3.0076	4.1211	5.0986
4000	4.0243	4.3343	3.0065	4.1224	5.1062
4100	4.0258	4.3350	3.0054	4.1236	5.1136
4200	4.0273	4.3356	3.0044	4.1249	5.1209
4300	4.0287	4.3363	3.0033	4.1259	5.1279
4400	4.0301	4.3369	3.0025	4.1271	5.1348
4500	4.0314	4.3376	3.0017	4.1284	5.1416
4600	4.0328	4.3383	3.0010	4.1294	5.1484
4700	4.0341	4.3388	3.0004	4.1305	5.1549
4800	4.0355	4.3395	2.9998	4.1316	5.1608
4900	4.0366	4.3400	2.9992	4.1328	5.1670
5000	4.0379	4.3407	2.9988	4.1338	5.1729
5100	4.0391	4.3413	2.9984	4.1348	5.1789
5200	4.0404	4.3419	2.9980	4.1358	5.1846
5300	4.0415	4.3424	2.9977	4.1368	5.1903
5400	4.0427	4.3430	2.9976	4.1378	5.1957
5500	4.0439	4.3436	2.9974	4.1388	5.2013
5600	4.0451	4.3441	2.9974	4.1397	5.2066
5700	4.0461	4.3447	2.9974	4.1407	5.2118
5800	4.0473	4.3452	2.9974	4.1417	5.2169
5900	4.0484	4.3458	2.9975	4.1426	5.2221
6000	4.0494	4.3463	2.9975	4.1434	5.2271

$$\left(\frac{S^{p=1}}{R} \right)_T - \ln T \left[\left(\frac{S^{p=1}}{R} \right)_{T_1} \right] + \frac{T - T_1}{100} \left(\left[\left(\frac{S^{p=1}}{R} \right)_{T_2} \right] - \left[\left(\frac{S^{p=1}}{R} \right)_{T_1} \right] \right)$$

$$T_1 < T < T_2 + 100 = T_2$$

TABLE 16

 FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
 SHOCKED INLET (CRITICAL CONDITION)

	FREE STREAM	FUSELAGE AIRSTREAM 1	DIFFUSER INLET 2	DIFFUSER THROAT 3
T (K)	200	230	1256.6	1110.5
P (atm)	.01	.02	.59236	.3565
u (m/s)	1420.3	1525	281.315	652.274
M (frozen)	5	5	0.407	1.000
n_{O_2}	.210084	.210084	.209922	.210032
n_{N_2}	.789916	.789916	.789752	.789864
n_O	0	0	0	0
n_N	0	0	0	0
n_{NO}	0	0	.000326	.000104
n_{H_2}	0	0	0	0
n_{H_2O}	0	0	0	0
n_{OH}	0	0	0	0
n_H	0	0	0	0
m (g/mole)	28.853	28.853	28.853	28.853
δ (frozen)	1.4	1.4	1.319167	1.32772
$\frac{S}{R_2}$	NC	NC	29.7868	29.7862
$\frac{h_{f, abs}}{R_2 T_2}$	NC	.556455	3.742178	3.263834
$\frac{A}{A_3}$	NA	NA	1.5782	1

NC-means Not Calculated
 NA-means Not Applicable

TABLE 17

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET

SHOCKED INLET, $M_1 = 5$, $\theta_{0_2}^\circ = 0.5$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT 3c	INLET 3c	EXIT 4	NOZZLE EXIT 5
T (K)	739	739	2428	2123
P (atm)	.0722	.0722	.0722	.02
u (m/s)	1125.78	1125.78	1125.78	1813.105
M (frozen)	2.093	NC	1.088	1.896
n_{O_2}	.210084	.147929	.0129	.0071
n_{N_2}	.789916	.556213	.627008	.642571
n_O	0	0	.004220	.000964
n_{NO}	0	0	.004694	.001853
n_{H_2}	0	.295858	.038280	.018524
n_{H_2O}	0	0	.280390	.318257
n_{OH}	0	0	.019017	.0075696
n_H	0	0	.013169	.003441
\bar{m} (g/mole)	28.853	NC	23.652848	24.203772
γ (frozen)	1.358717	NC	1.254343	1.253704
$\frac{S}{R_2}$	29.7868	NC	42.50791	42.5074
$\frac{h_f^{abs}}{R_2 T_2}$	2.101288	NC	2.876558	.087128
$\frac{A}{A_3}$	1.9028	1.9028	7.6261	14.6064

TABLE 18

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
SHOCKED INLET, $M = 5$, $\mathcal{D}_{O_2}^0 = 2$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT	INLET	EXIT	NOZZLE EXIT
	3c	3c	4	5
T (K)	967	967	1656.7	931
P(atm)	.205	.205	.205	.02
u (m/s)	870.529	870.529	870.529	1623.397
M (frozen)	1.426	NC	1.085	2.717
n_{O_2}	.210084	.190114	.1486	.1497
n_{N_2}	.789916	.714829	.749335	.750492
n_O	0	0	.000024	0
n_N	0	NC	NC	NC
n_{NO}	0	0	.002161	.000018
n_{H_2}	0	.095057	.000007	0
n_{H_2O}	0	0	.099592	.099800
n_{OH}	0	0	.000379	0
n_H	0	0	.0000006	0
\mathcal{M} (g/mole)	28.853	NC	27.614528	27.614592
γ (frozen)	1.3373	NC	1.291421	1.330458
$\frac{S}{R_2}$	29.7840	NC	33.5544	33.5550
$\frac{h_{f,abs}^T}{R_2 T_2}$	2.804904	NC	3.065934	.473109
$\frac{A}{A_3}$	1.1340	1.1340	2.0300	6.2703

TABLE 19

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
SHOCKED INLET (CRITICAL CONDITION)

	FREE STREAM ∞	FUSELAGE AIRSTREAM 1	DIFFUSER INLET 2	DIFFUSER THROAT 3
T (K)	200	300	3084	2835
P (atm)	.01	.04	3.162	1.046
u (m/s)	2840.5	2785	368.434	1014.94
M (frozen)	10	8	0.341	0.986
n_{O_2}	.210084	.210084	.16568	.17679
n_{N_2}	.789916	.789916	.752654	.761866
n_O	0	0	.034057	.024984
n_N	0	0	.000011	.000004
n_{NO}	0	0	.047598	.036356
n_{H_2}	0	0	0	0
n_{H_2O}	0	0	0	0
n_{OH}	0	0	0	0
n_H	0	0	0	0
m (g/mole)	28.853	28.853	28.36149	28.490545
γ (frozen)	1.4	1.4	1.289101	1.249
$\frac{S}{R_2}$	NC	NC	32.6595	32.6564
$\frac{h_f}{R_2 T_2}$	NC	.340277	4.55986	4.065243
$\frac{A}{A_3}$	NA	NA	.9958	1

TABLE 20

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
 SHOCKED INLET, $M = 10$, $\nu_{O_2}^0 = 0.5$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT 3c	INLET 3c	EXIT 4	NOZZLE EXIT 5
T (K)	2490	2490	3026.5	2223
P (atm)	.46	.46	.46	.04
u (m/s)	1514.986	1514.986	1514.986	3134.385
M (frozen)	1.571	NC	1.247	3.198
n_{O_2}	.193418	.147929	.0222	.0082
n_{N_2}	.775113	.556213	.570000	.639646
n_O	.008879	0	.027032	.001414
n_N	.0000004	0	NC	NC
n_{NO}	.022589	0	.014186	.002508
n_{H_2}	0	.295858	.075977	.022755
n_{H_2O}	0	0	.171442	.310772
n_{OH}	0	0	.049762	.009909
n_H	0	0	.069330	.004846
m (g/mole)	28.72488	NC	21.695834	24.09626
γ (frozen)	1.290383	NC	1.273074	1.252743
$\frac{S}{R_2}$	32.6600	NC	41.36155	41.38221
$\frac{h_f^T}{R_2 T_2}$	3.365602	NC	4.500086	0.336135
$\frac{A}{A_3}$	1.3901	1.3901	2.1356	7.8505

TABLE 21

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET

SHOCKED INLET, $M = 10$, $\gamma_{O_2}^{\circ} = 2$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT 3c	INLET 3c	EXIT 4	NOZZLE EXIT 5
T (K)	2661	2661	2836.5	1839
P (atm)	.7	.7	.7	.04
u (m/s)	1300.023	1300.023	1300.023	2407.716
M (frozen)	1.302	NC	1.225	2.852
n_{O_2}	.186028	.190114	.1162	.14697
n_{N_2}	.769139	.714829	.713782	.747921
n_{O}	.015643	0	.025328	.000332
n_{N}	.000001	0	NC	NC
n_{NO}	.029191	0	.028587	.004120
n_{H_2}	0	.095057	.006309	.000099
n_{H_2O}	0	0	.071173	.098709
n_{OH}	0	0	.029890	.001824
n_{H}	0	0	.008782	.000024
m (g/mole)	28.627296	NC	26.790837	27.59534
γ (frozen)	1.289737	NC	1.280166	1.286426
$\frac{S}{R_2}$	32.64504	NC	35.3137	35.31434
$\frac{h_f^{abs}}{R_2 T_2}$	3.700259	NC	3.79076	1.5194
$\frac{A}{A_3}$	1.0898	1.0898	1.2413	7.3824

TABLE 22

 FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
 SHOCK EXPELLED (SUPERCRITICAL CONDITION)

	FREE STREAM	FUSELAGE AIRSTREAM 1	DIFFUSER INLET 2	DIFFUSER THROAT 3
T (K)	200	230	230	1107.5
P (atm)	.01	.02	.02	6.28
u (m/s)	1420.3	1525	1525	657.56
M (frozen)	5	5	5	1.0103
n_{O_2}	.210085	.210084	.210084	.210033
n_{N_2}	.789916	.789916	.789916	.789866
n_O	0	0	0	0
n_N	0	0	0	0
n_{NO}	0	0	0	.000101
n_{H_2}	0	0	0	0
n_{H_2O}	0	0	0	0
n_{OH}	0	0	0	0
n_H	0	0	0	0
\bar{m} (g/mole)	28.853	28.853	28.853	28.85297
γ (frozen)	1.4	1.4	1.4	1.327386
$\frac{S}{R_2}$	NC	26.907	26.907	26.9061
$\frac{h_r^{abs}}{R_2 T_2}$	NC	3.496209	3.496209	17.77895
$\frac{A}{A_3}$	NA	NA	28.1177	1

TABLE 23

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET

SHOCK EXPELLED, $M = 5$, $\nu_{O_2}^0 = 0.5$

	DIFFUSER EXIT 3c	COMBUSTION CHAMBER INLET 3c	COMBUSTION CHAMBER EXIT 4	EXHAUST NOZZLE EXIT 5
T (K)	754.9	754.9	2604	1234.5
P (atm)	1.395	1.395	1.395	.02
u (m/s)	1110.205	1110.205	1110.205	2356.845
M (frozen)	2.064	NC	1.046	3.215
n_{O_2}	.210084	.147929	.008	.00001
n_{N_2}	.78916	.556213	.635607	.652770
n_O	0	0	.001783	0
n_N	0	0	NC	NC
n_{NO}	0	0	.005034	.000002
n_{H_2}	0	.295858	.027711	.000021
n_{H_2O}	0	0	.301792	.347196
n_{OH}	0	0	.014371	.000002
n_H	0	0	.005478	0
μ (g/mole)	28.853	NC	23.98566	24.543573
γ (frozen)	1.329684	NC	1.247582	1.285460
$\frac{S}{R_2}$	26.90625	NC	38.92074	38.92110
$\frac{h_f^{abs}}{R_2 T_2}$	11.74239	NC	15.928338	-25.9767
$\frac{A}{A_3}$	1.8175	1.8175	7.5414	114.7979

TABLE 24

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
SHOCK EXPELLED, $M = 5$, $v_{O_2}^0 = 2$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT	INLET	EXIT	NOZZLE EXIT
	3c	3c	4	5
T (K)	936	936	1705	484
P (atm)	3.2	3.2	3.2	.02
u (m/s)	910.123	910.123	910.123	1742.997
M (frozen)	1.515	NC	1.119	3.889
n_{O_2}	.210084	.190114	.14825	.1497
n_{N_2}	.789916	.714829	.749144	.750499
n_O	0	0	.000010	0
n_N	0	0	NC	NC
n_{NO}	0	0	.002600	0
n_{H_2}	0	.095057	.000003	0
n_{H_2O}	0	0	.099657	.099800
n_{OH}	0	0	.000266	0
n_H	0	0	.0000002	0
m (g/mole)	28.853	NC	27.610155	27.613586
γ (frozen)	1.33755	NC	1.289948	1.378425
$\frac{S}{R_2}$	26.9074	NC	30.9574	30.9551
$\frac{h_{f,abs}^T}{R_2 T_2}$	14.79195	NC	17.73222	-5.186886
$\frac{A}{A_3}$	1.1983	1.1983	2.2811	54.0926

TABLE 25

 FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
 SHOCK EXPELLED (SUPERCRITICAL CONDITION)

	FREE STREAM ∞	FUSELAGE AIRSTREAM 1	DIFFUSER INLET 2	DIFFUSER THROAT 3
T (K)	200	300	300	2940
P(atm)	.01	.04	.04	272
u (m/s)	2840.5	2785	2785	1042.96
M (frozen)	10	8	8	0.999
n_{O_2}	.210084	.210084	.210084	.187123
n_{N_2}	.789916	.789916	.789916	.767460
n_O	0	0	0	.002396
n_N	0	0	0	.0000005
n_{NO}	0	0	0	.043021
n_{H_2}	0	0	0	0
n_{H_2O}	0	0	0	0
n_{OH}	0	0	0	0
n_H	0	0	0	0
m (g/mole)	28.853	28.853	28.853	28.818412
γ (frozen)	1.4	1.4	1.4	1.284703
$\frac{S}{R_2}$	NC	27.5823	27.5823	27.5793
$\frac{h_f}{R_2 T_2}$ abs	NC	3.49805	3.49805	42.0671
$\frac{A}{A_3}$	NA	NA	259.3541	1

TABLE 26

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
SHOCK EXPELLED, $M = 10$, $\nu_{O_2}^{\circ} = 0.5$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT 3c	INLET 3c	EXIT 4	NOZZLE EXIT 5
T (K)	2570	2570	3579.4	729
P (atm)	136	136	136	.04
u (m/s)	1480.836	1480.836	1480.836	3423.661
M (frozen)	1.516	NC	1.176	5.969
n_{O_2}	.19657	.147929	.099	.0000001
n_{N_2}	.776561	.556213	.613449	.652778
n_{O}	.000765	0	.005079	0
n_{N}	0	0	NC	NC
n_{NO}	.026104	0	.017033	0
n_{H_2}	0	.295858	.051814	0
n_{H_2O}	0	.255195	.347222	.347222
n_{OH}	0	0	.033965	0
n_{H}	0	0	.013684	0
m (g/mole)	28.841937	NC	23.389112	24.543781
γ (frozen)	1.288146	NC	1.245256	1.332298
$\frac{S}{R_2}$	27.58286	NC	33.8596	33.85376
$\frac{h_{f, abs}^T}{R_2 T_2}$	35.67526	NC	39.433868	-28.35987
$\frac{A}{A_3}$	1.2303	1.2303	2.1131	603.1073

TABLE 27

FLUID PROPERTIES OF SUPERSONIC COMBUSTION RAMJET
SHOCK EXPELLED, $M = 10$, $\gamma_{O_2}^0 = 2$

	DIFFUSER	COMBUSTION CHAMBER		EXHAUST
	EXIT 3c	INLET 3c	EXIT 4	NOZZLE EXIT 5
T (K)	2734	2734	3110	448
P (atm)	186	186	186	.04
u (m/s)	1309.282	1309.282	1309.282	2752.387
M (frozen)	1.300	NC	1.197	6.368
π_{O_2}	.19268	.190114	.1128	.1497
π_{N_2}	.772792	.714829	.724572	.750499
π_O	.001331	0	.004156	0
π_N	.0000001	0	NC	NC
π_{NO}	.033197	0	.041401	0
π_{H_2}	0	.095057	.001223	0
π_{H_2O}	0	0	.089893	.099800
π_{OH}	0	0	.015420	0
π_H	0	0	.000559	0
\mathcal{M} (g/mole)	28.83377	NC	27.42287	27.614384
γ (frozen)	1.286661	NC	1.269813	1.385055
$\frac{S}{R_2}$	27.58312	NC	29.94482	29.94014
$\frac{h_f^{abs}}{R_2 T_2}$	38.4437	NC	39.38418	-4.431565
$\frac{A}{A_3}$	1.0827	1.0827	1.2950	409.7627

BIBLIOGRAPHY

Edse R., Ignition, Combustion, Detonation, and Quenching of Reactive Mixtures, AFOSR-TR-RF Project 3641, November, 1975

Preyss and Hearth, The Case for a Hypersonic Research Vehicle, Astronautics and Aeronautics, December 1976

Sims, Joseph L. Sims, Tables for Supersonic Flow Around Right Circular Cones at Zero Angle of Attack, NASA SP 3004, 1964